



TEST REPORT

Test report no.: 1-5831/13-05-13



Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing: Radio/Satellite Communications

Applicant

Sony Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN
Phone: +46 46 19 30 00
Fax: +46 46 19 32 95
Contact: Håkan Sjöberg
e-mail: hakan.sjoberg@sonymobile.com
Phone: +46 46 19 35 59

Manufacturer

CETECOM GmbH
Im Teelbruch 116
45219 Essen / GERMANY

Test standard/s

47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I
Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDDI/V/VI/XIX; LTE FDD1/19/21; WLAN a/b/g/n; BT 3.1; RFID; FM Rx; A-GPS
Model name: PM-0320-BV
FCC ID: PY7PM-0320
IC: -/
Frequency: ISM-band 5.8 GHz
lowest channel: 149 – 5745 MHz; highest channel: 165 – 5825 MHz
Technology tested: WLAN (a-mode, n-mode, nHT40-mode)
Antenna: Integrated antenna
Power Supply: 3.7V DC by Li-ION battery
Temperature Range: -20°C to +50°C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:

Marco Bertolino
Testing Manager

Test performed:

Andreas Luckenbill
Expert

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details.....	3
3	Test standard/s	3
3.1	Measurement guidance.....	3
4	Test environment.....	4
5	Test item	4
5.1	Additional information	4
6	Test laboratories sub-contracted	5
7	Summary of measurement results	6
8	RF measurements	7
8.1	Description of test setup	7
8.1.1	Radiated measurements.....	7
8.1.2	Conducted measurements.....	8
8.2	Additional comments	8
9	Measurement results.....	9
9.1	Output power verification (conducted)	9
9.2	Antenna gain	10
9.3	Maximum output power	13
9.4	Power spectral density	20
9.5	Spectrum bandwidth – 6 dB	27
9.6	Spectrum bandwidth – 20 dB	33
9.7	Band edge compliance conducted	39
9.8	Band edge compliance radiated	39
9.9	TX spurious emissions conducted	40
9.10	TX spurious emissions radiated.....	48
9.11	RX spurious emissions radiated	65
9.12	Spurious emissions radiated < 30 MHz	69
9.13	Spurious emissions conducted < 30 MHz	71
10	Test equipment and ancillaries used for tests	74
11	Observations	75
Annex A	Document history	76
Annex B	Further information.....	76
Annex C	Accreditation Certificate	77

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2013-01-15
Date of receipt of test item:	2013-02-18
Start of test:	2013-02-18
End of test:	2013-03-07
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices

3.1 Measurement guidance

DTS : KDB 558074	2012-04	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
------------------	---------	---

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+50 °C during high temperature tests
	T_{min}	-20 °C during low temperature tests
Relative humidity content:		42 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.7 V DC by Li-ION battery
	V_{max}	4.1 V
	V_{min}	3.3 V

5 Test item

Kind of test item	:	Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSPA FDDI/V/VI/XIX; LTE FDD1/19/21; WLAN a/b/g/n; BT 3.1; RFID; FM Rx; A-GPS
Type identification	:	PM-0320-BV
S/N serial number	:	Rad. CB5A1NUBTB, CB5A1NUBM6 Cond. CB5A1NUBMJ, CB5A1NUBMY
HW hardware status	:	AP1
SW software status	:	atp_dogo_dcm_0_0_36_0_d
Frequency band [MHz]	:	ISM-band 5.8 GHz lowest channel: 149 – 5745 MHz; highest channel: 165 – 5825 MHz
Type of radio transmission	:	OFDM
Use of frequency spectrum	:	
Type of modulation	:	QPSK, 16-QAM, 64-QAM
Number of channels	:	5
Antenna	:	Integrated antenna
Power supply	:	3.7 V DC by Li-ION battery
Temperature range	:	-20°C to +50°C

5.1 Additional information

Test setup- and EUT-photos are included in the following test reports:

External EUT photos:	1-5831/13-05-01_AnnexA
Internal EUT photos:	1-5831/13-05-01_AnnexB
Test setup:	1-5831/13-05-01_AnnexD

6 Test laboratories sub-contracted

None

7 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15	Passed	2013-03-07	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Remark
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna gain	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(e) RSS 210 / A8.2(b)	Power spectral density	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth - 6dB bandwidth	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth - 20dB bandwidth	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(b)(3) RSS-210 / A8.4(4)	Maximum output power	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	Band edge compliance conducted	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.205 RSS-210 / A8.5	Band edge compliance radiated	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions conducted	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions radiated	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109 RSS-Gen	RX spurious emissions radiated	Nominal	Nominal	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a) RSS-Gen	TX spurious emissions radiated < 30 MHz	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a)	Conducted emissions < 30 MHz	Nominal	Nominal	OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

Note: NA = Not Applicable; NP = Not Performed

8 RF measurements


8.1 Description of test setup

8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2003 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

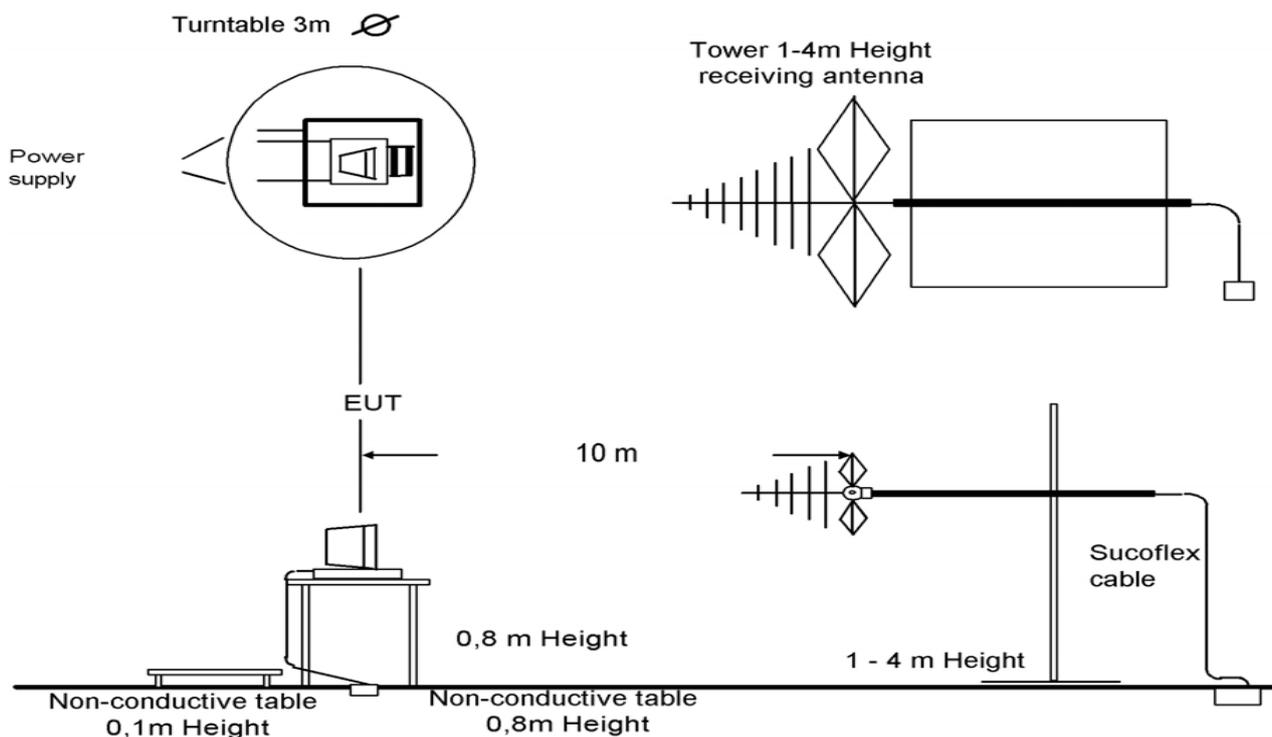


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage. The signalling is performed from outside the chamber with a signalling unit (CMU200 or other) by air link using signalling antenna.

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

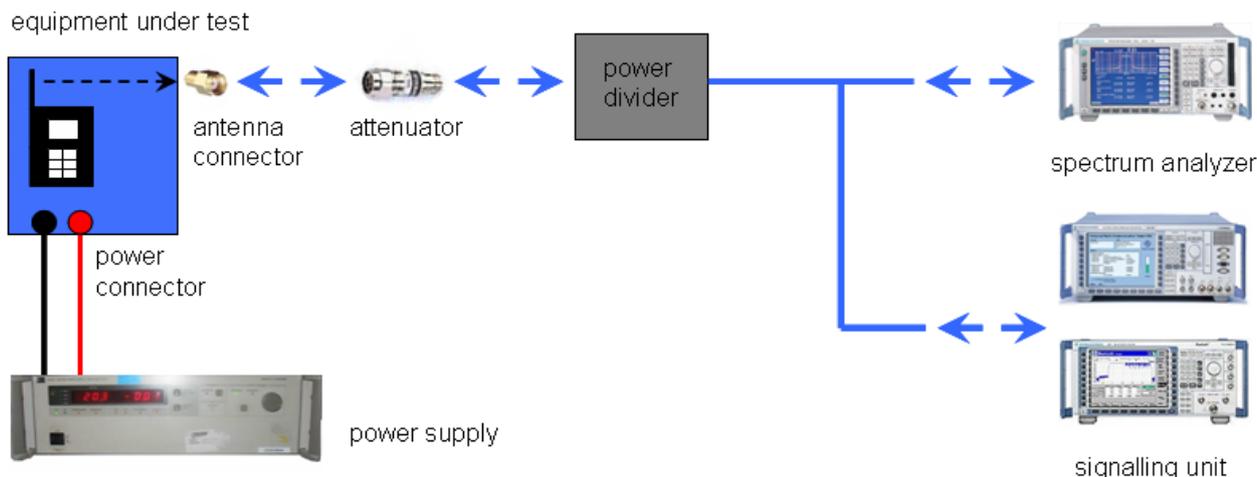

Picture 2: Diagram conducted measurements

8.2 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

- Test mode:
- No test mode available. Iperf was used to ping another device with the largest support packet size
 - Special software is used. EUT is transmitting pseudo random data by itself

9 Measurement results

9.1 Output power verification (conducted)

Description:

Measurement of the maximum output power conducted. This measurement is performed only at the middle channel in both modes and all data rates to determine the data rate per mode which results in the highest output power. This mode will be selected for all further measurements.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	10 s
Resolution bandwidth:	> EBW
Video bandwidth:	≥ 3 x RBW (or the maximum of the analyzer)
Span:	Zero span
Trace-Mode:	Max hold (allow trace to fully stabilize)

Results:

OFDM / a – mode Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]							
	6	9	12	18	24	36	48	54
Ch 157 - 5785 MHz	18.7	18.7	18.7	18.7	18.7	18.7	18.7	18.7
Measurement uncertainty	± 0.5 dB							

OFDM / n – mode HT20 Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]							
	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Ch 157 - 5785 MHz	18.1	18.1	18.1	18.1	18.1	18.2	18.1	18.2
Measurement uncertainty	± 0.5 dB							

OFDM / n – mode HT40 Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]							
	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Ch 151 - 5755 MHz	18.0	17.7	17.2	17.6	17.1	17.1	17.2	17.1
Measurement uncertainty	± 0.5 dB							

Result: Selected data rate for all measurements:

OFDM / a – mode: 24 MBit/s
 OFDM / n – mode HT20: MCS7
 OFDM / n – mode HT40: MCS0

9.2 Antenna gain

Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	5 s
Resolution bandwidth:	3 MHz
Video bandwidth:	10 MHz
Trace-Mode:	Max hold

Limits:

FCC	IC
Antenna Gain	
6 dBi	


Results:

T _{nom}	V _{nom}	lowest channel 5745 MHz	middle channel 5785 MHz	highest channel 5825 MHz
Conducted power [dBm]		11.5	11.9	11.8
Radiated power [dBm]		11.3	11.6	10.9
Gain [dBi] Calculated		-0.2	-0.3	-0.9
Measurement uncertainty			± 1.5 dB (cond.) / ± 3 dB (rad.)	


Result: **Passed**

Plots: conducted power for gain calculation


Plot 1: low channel

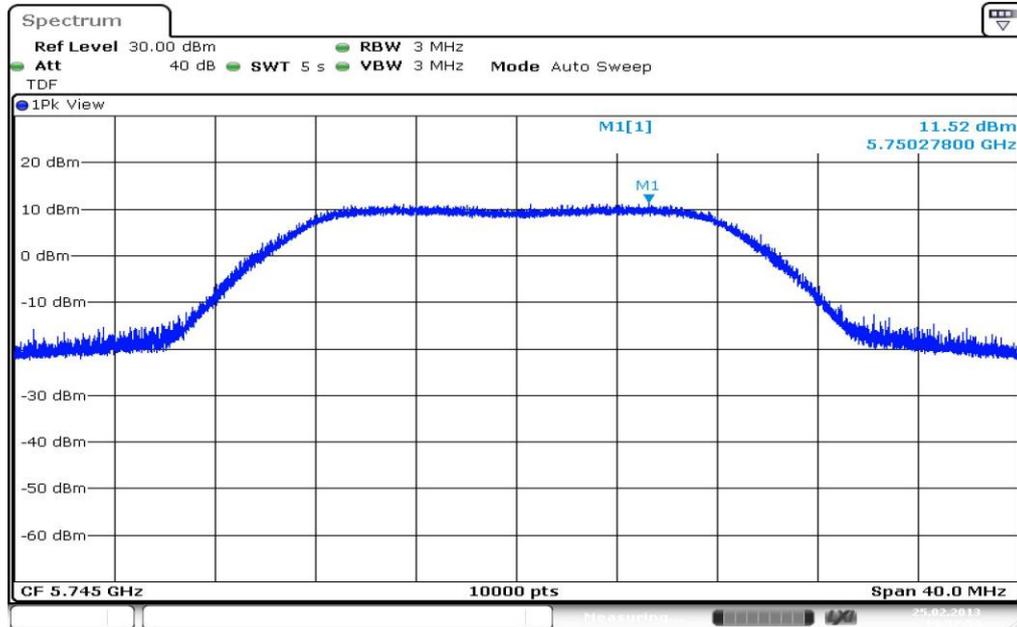

Plot 2: middle channel

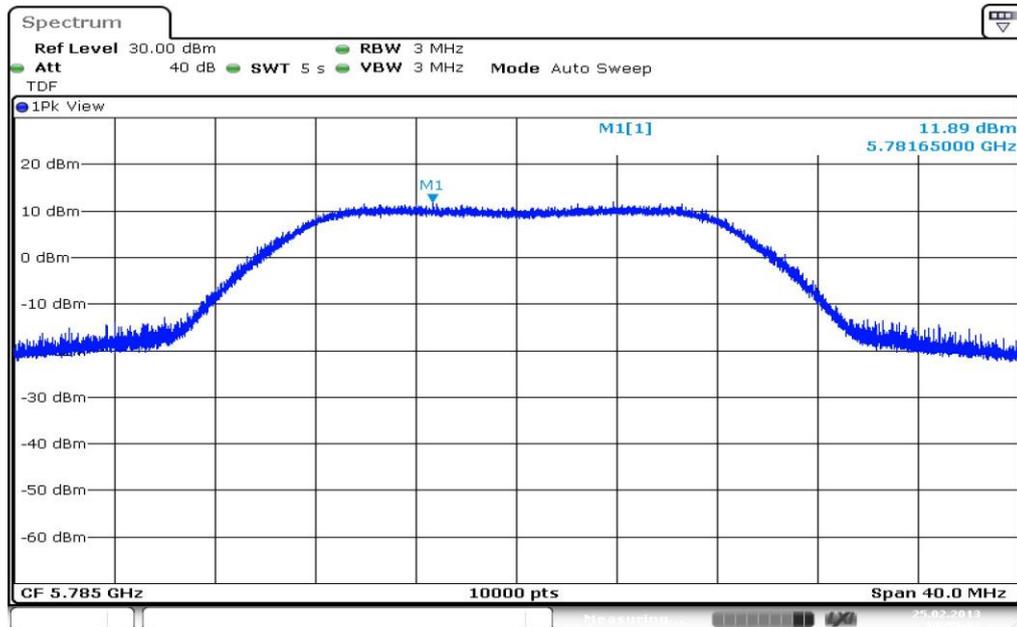

Plot 3: high channel

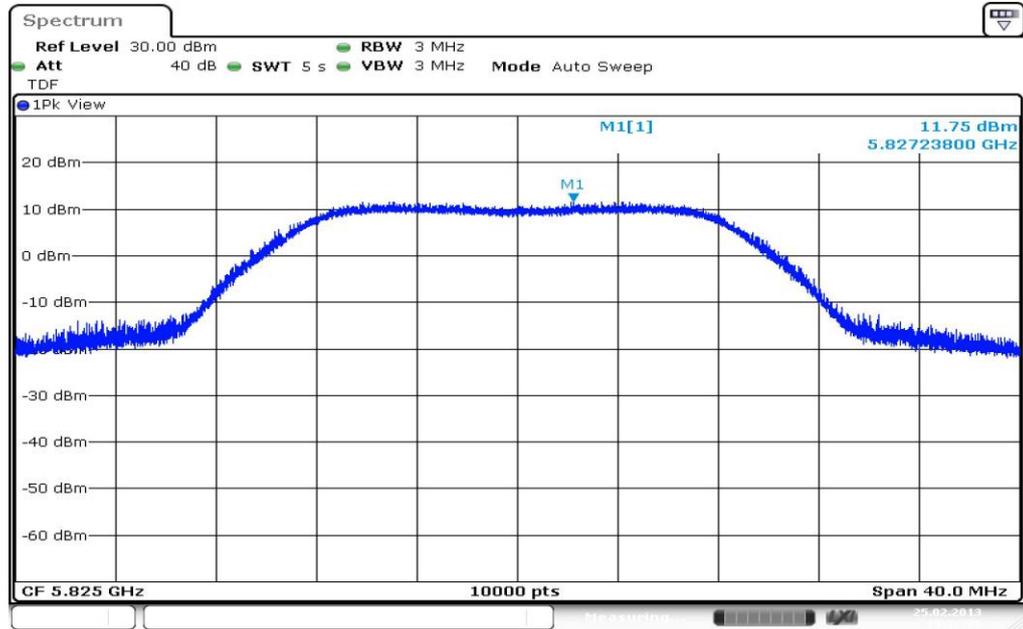

Date: 25.FEB.2013 15:12:37

9.3 Maximum output power

Description:

Measurement of the maximum output power conducted and radiated. The measurements are performed using the data rate producing the highest conducted output power. The determination of these data rates was performed at the beginning of the tests.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	3 MHz / 10 MHz (at least 1 MHz)
Video bandwidth:	$\geq 3 \times \text{RBW}$ (or maximum of available setting)
Span:	> DTS bandwidth
Trace-Mode:	Max hold (allow trace to fully stabilize)

Limits:

FCC	IC
Maximum Output Power	
Conducted: 1.0 W – Antenna Gain max. 6 dBi	

Results: OFDM / a – mode

OFDM / a – mode Frequency	Maximum Output Power [dBm]		
	5745 MHz	5785 MHz	5825 MHz
Peak Output Power Conducted	16.6	16.9	16.7
Output Power Radiated – EIRP*)	16.4	16.6	15.8
Measurement uncertainty	$\pm 1.5 \text{ dB (cond.)} / \pm 3 \text{ dB (rad.)}$		

*) calculated with Antenna gain

Result: Passed

Results: OFDM / n – mode HT20

OFDM / n – mode Ht20 Frequency	Maximum Output Power [dBm]		
	5745 MHz	5785 MHz	5825 MHz
Peak Output Power Conducted	15.6	16.0	15.8
Output Power Radiated – EIRP*)	15.4	15.7	14.9
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*) calculated with Antenna gain

Result: Passed**Results: OFDM / n – mode**


OFDM / n – mode Ht40 Frequency	Maximum Output Power [dBm]		
	5755 MHz	5795 MHz	-/-
Peak Output Power Conducted	16.3	16.7	-/-
Output Power Radiated – EIRP*)	16.1	16.1	-/-
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*) calculated with Antenna gain


Result: Passed

Plots: OFDM / a – mode


Plot 1: TX mode, lowest channel

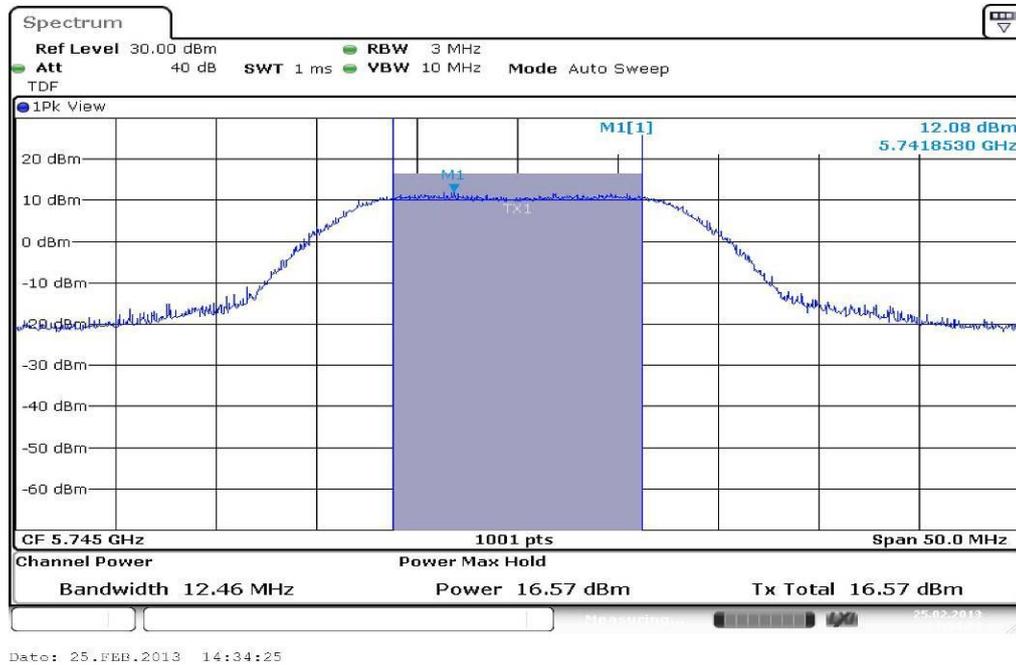

Plot 2: TX mode, middle channel

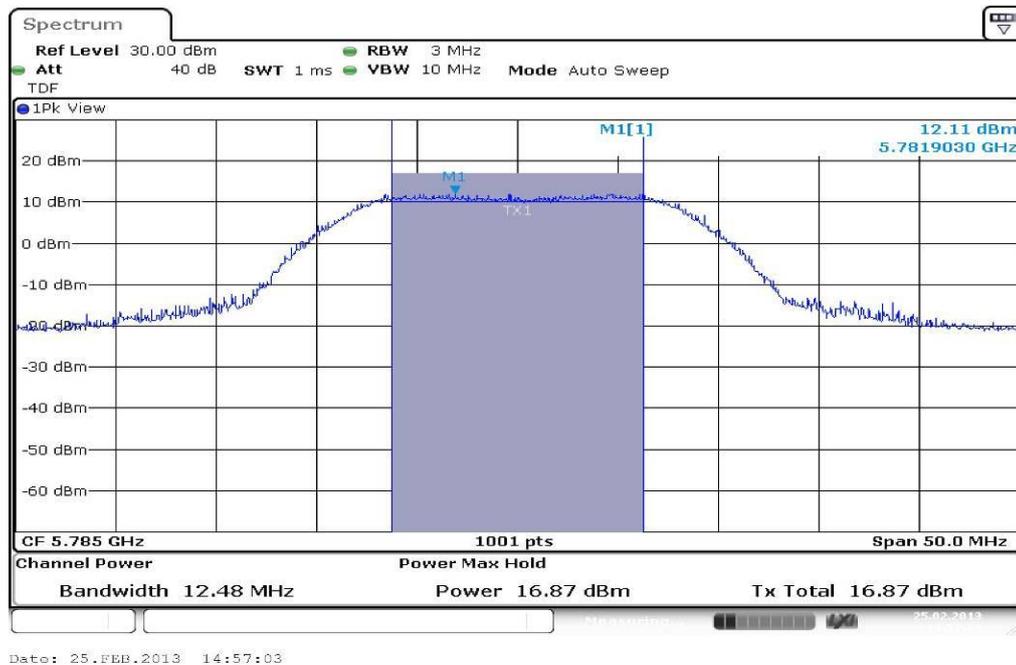


Plot 3: TX mode, highest channel

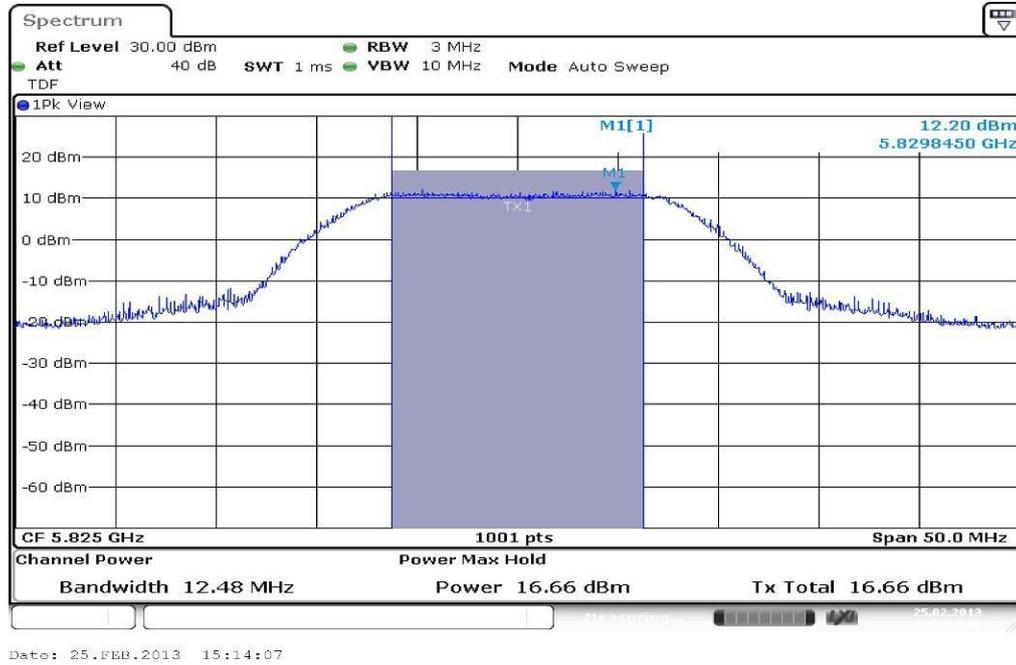


Plots: OFDM / n – mode HT20


Plot 1: TX mode, lowest channel

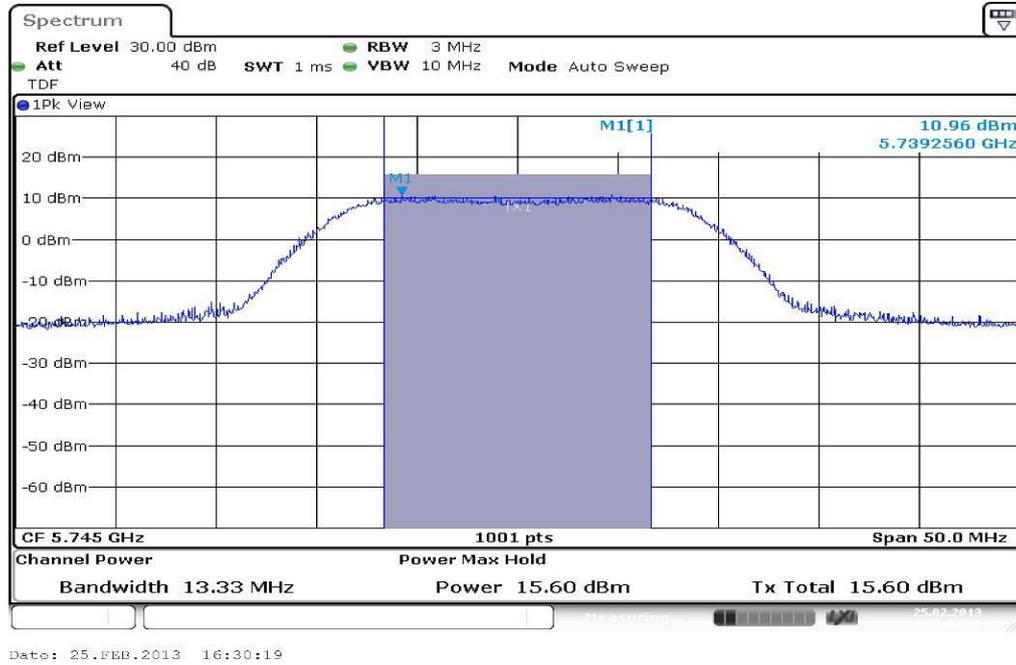

Plot 2: TX mode, middle channel

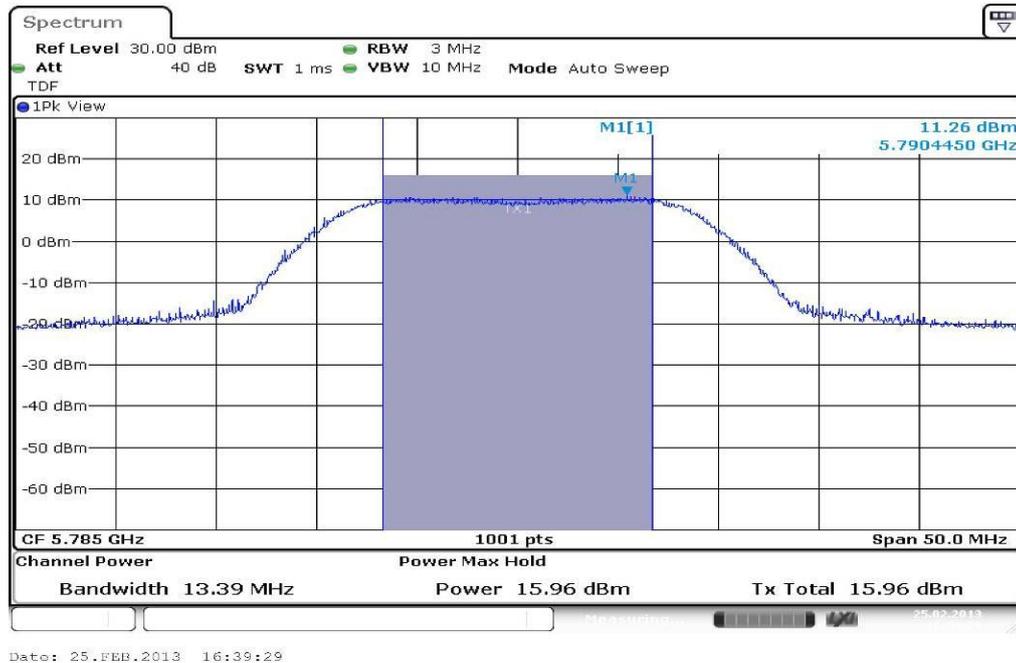


Plot 3: TX mode, highest channel

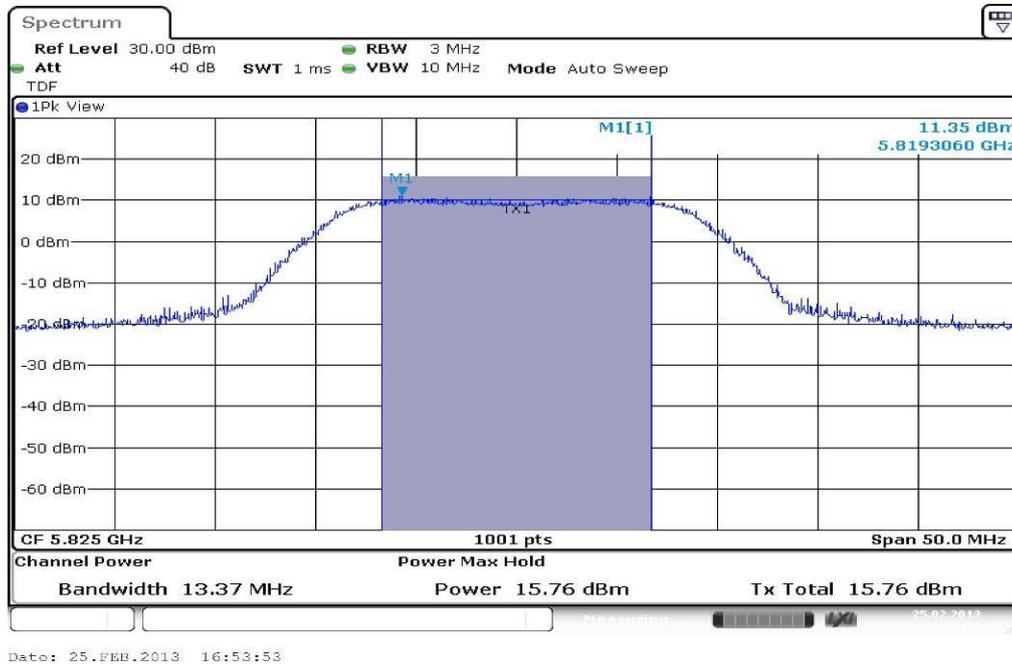


Plots: OFDM / n – mode HT40

Plot 1: TX mode, lowest channel

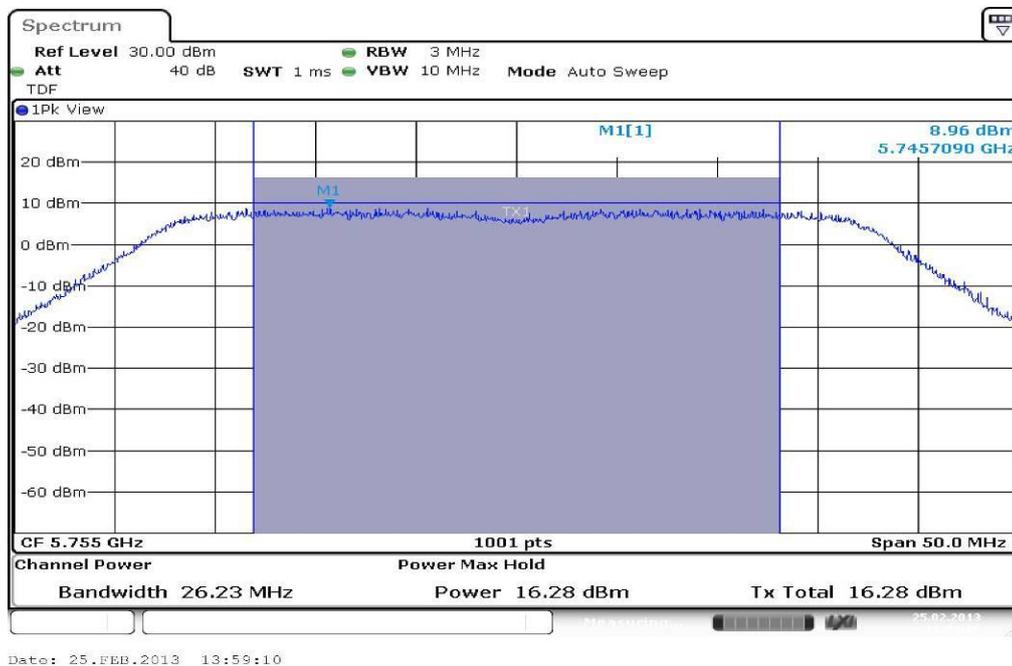

Plot 2: TX mode, highest channel

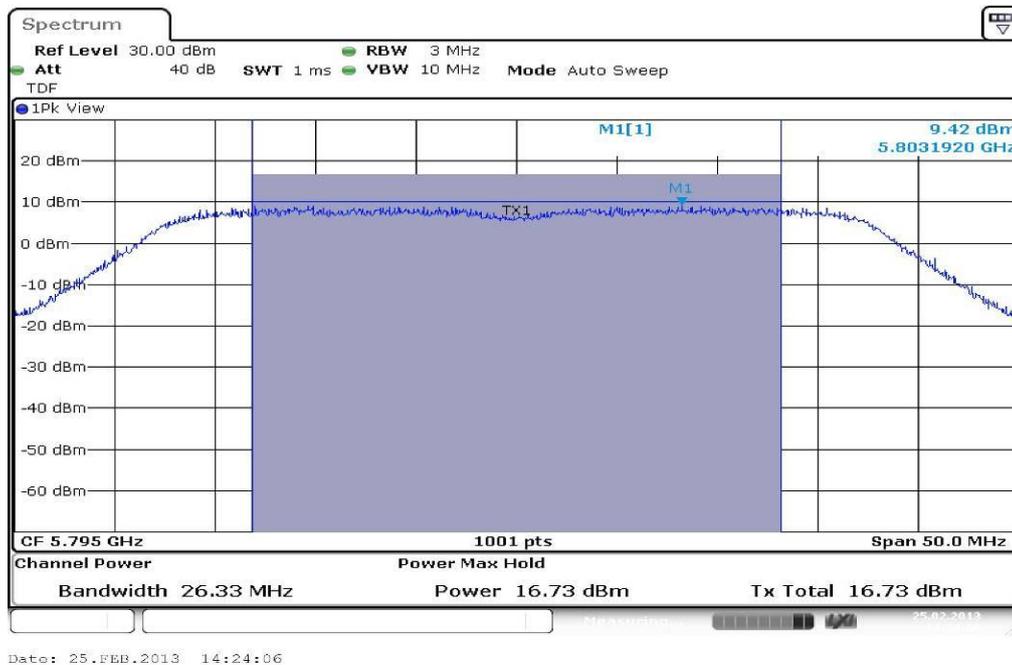

9.4 Power spectral density

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated for both modulations at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	≥ 3 kHz
Video bandwidth:	$\geq 3 \times$ RBW
Span:	1.5 times of the DTS BW
Trace-Mode:	Max hold (allow trace to fully stabilize)
Bandwidth correction:	Peak

Limits:

FCC	IC
Power Spectral Density	
8 dBm (conducted)	


Results:

Modulation	Power Spectral density [dBm]		
	5725 MHz	5785 MHz	5825 MHz
Frequency	5725 MHz	5785 MHz	5825 MHz
OFDM / a – mode	-17.7	-16.5	-16.6
OFDM / n – mode HT20	-17.9	-18.7	-18.2
Frequency	5755 MHz	5795 MHz	-/-
OFDM / n – mode HT40	-21.1	-21.5	-/-
Measurement uncertainty	± 1.5 dB		


Result: **Passed**

Plots: OFDM / a – mode


Plot 1: TX mode, lowest channel

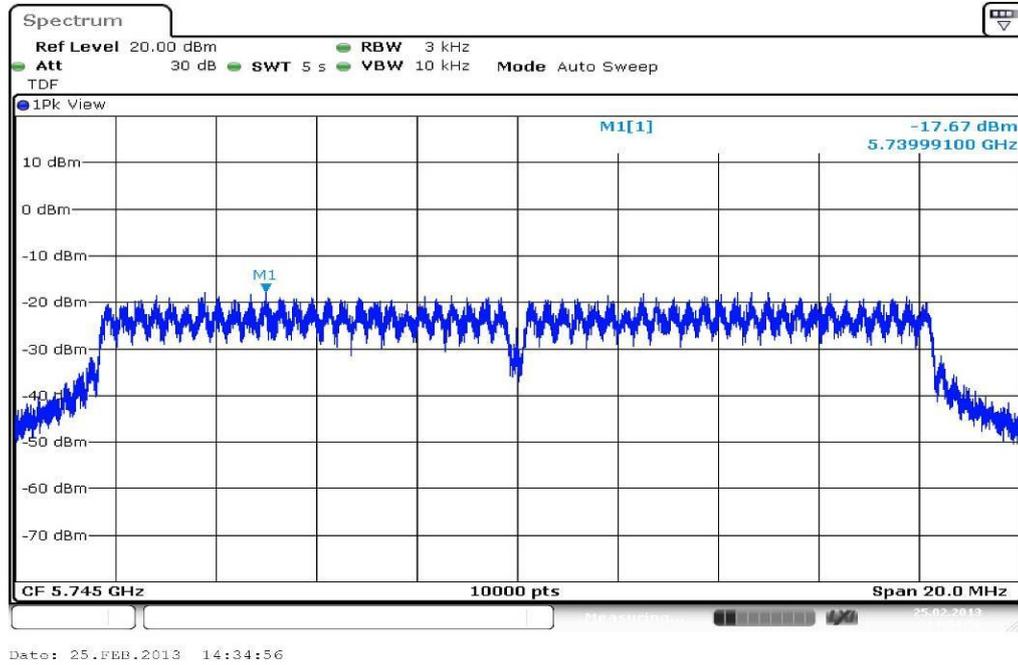

Plot 2: TX mode, middle channel

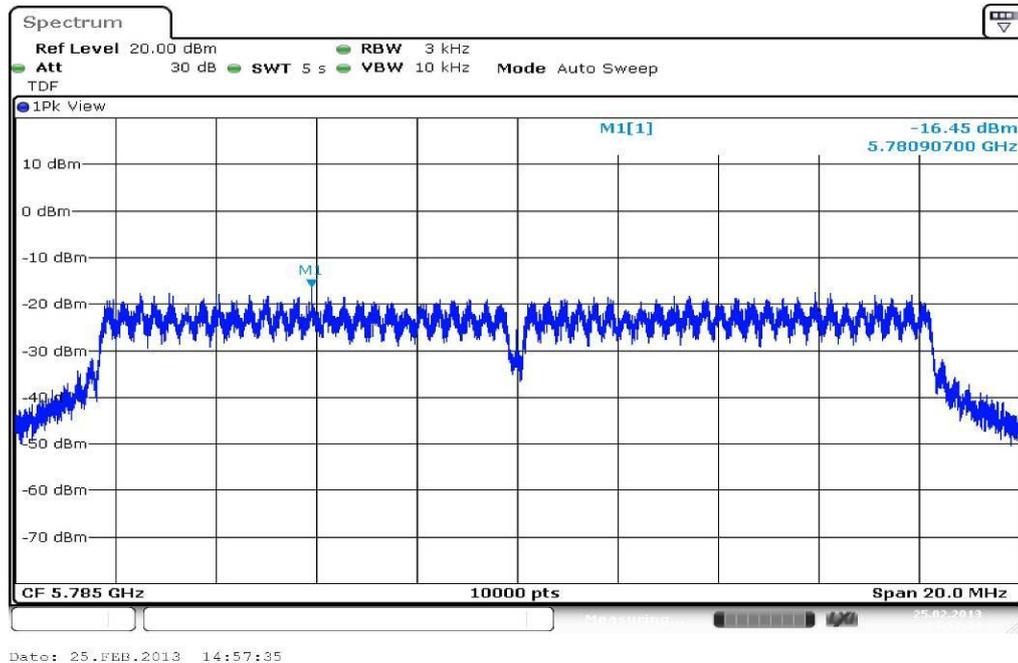


Plot 3: TX mode, highest channel

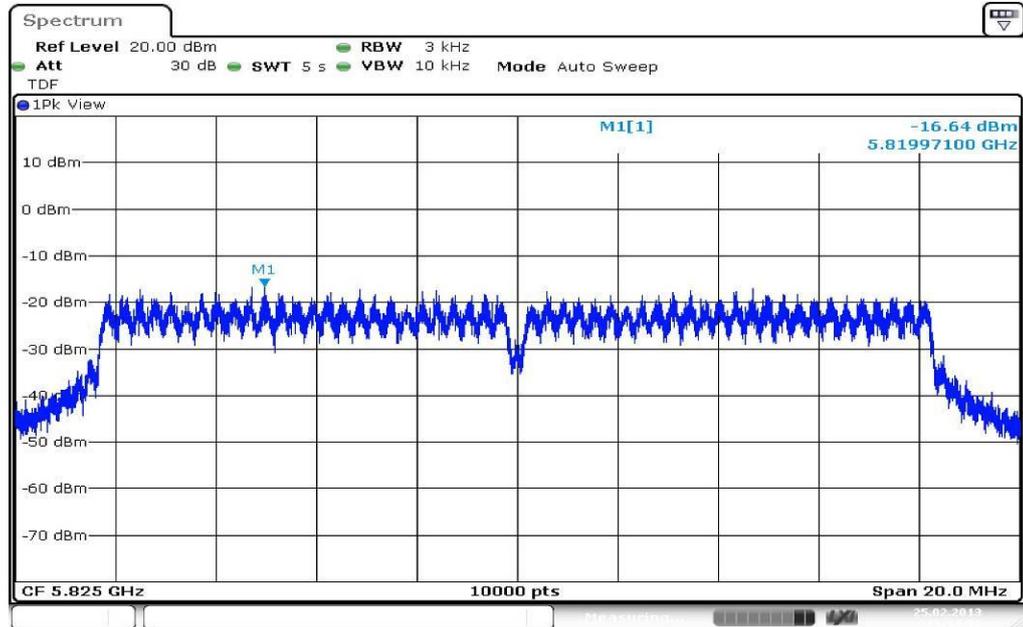


Date: 25.FEB.2013 15:14:39

Plots: OFDM / n – mode HT20


Plot 1: TX mode, lowest channel

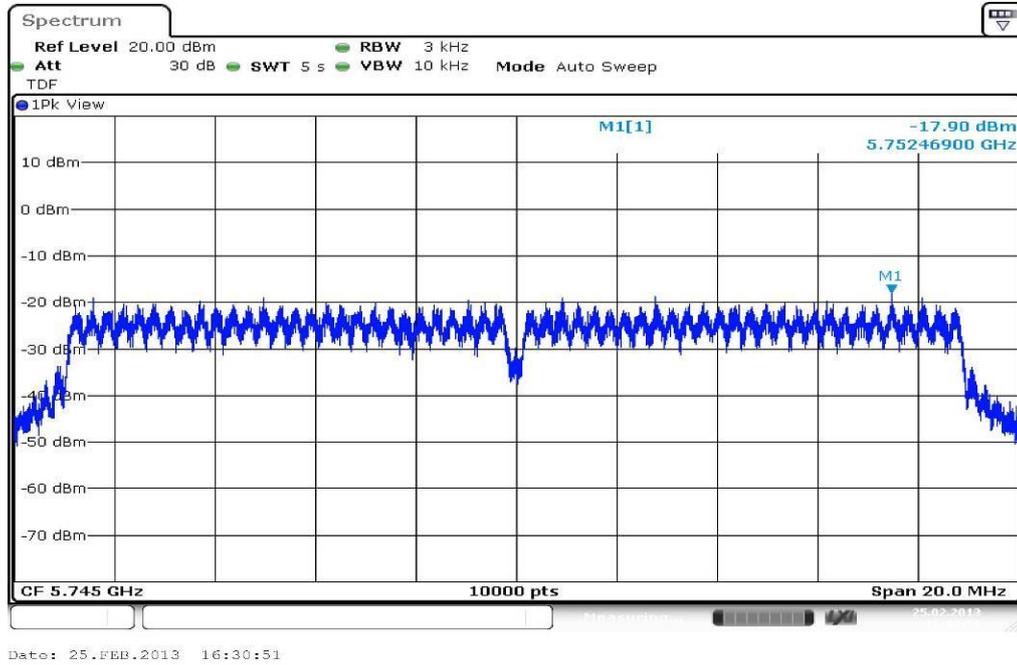

Plot 2: TX mode, middle channel

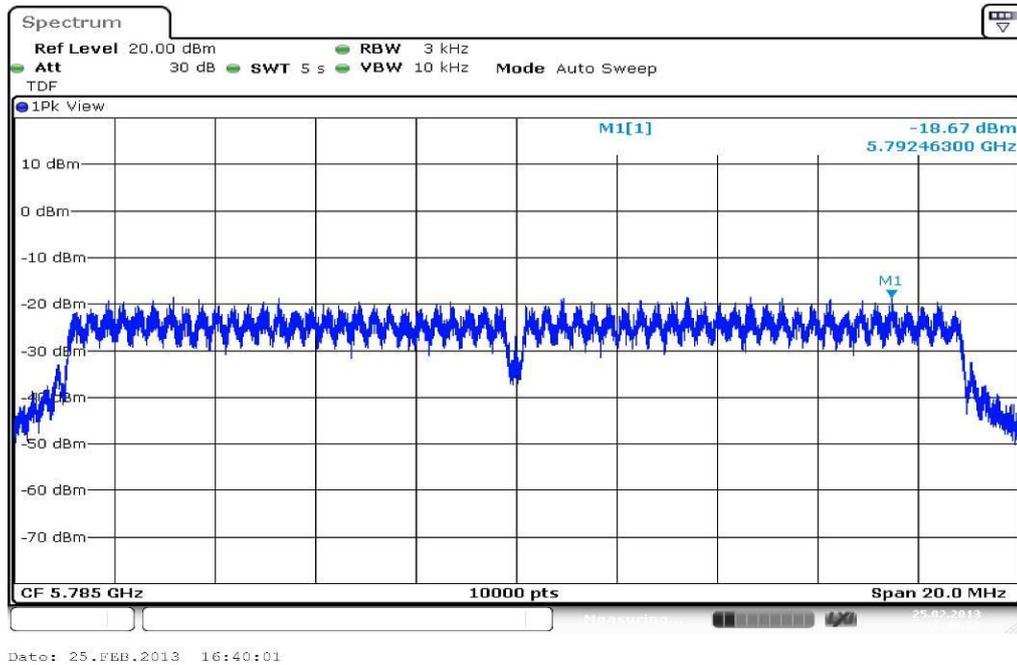


Plot 3: TX mode, highest channel

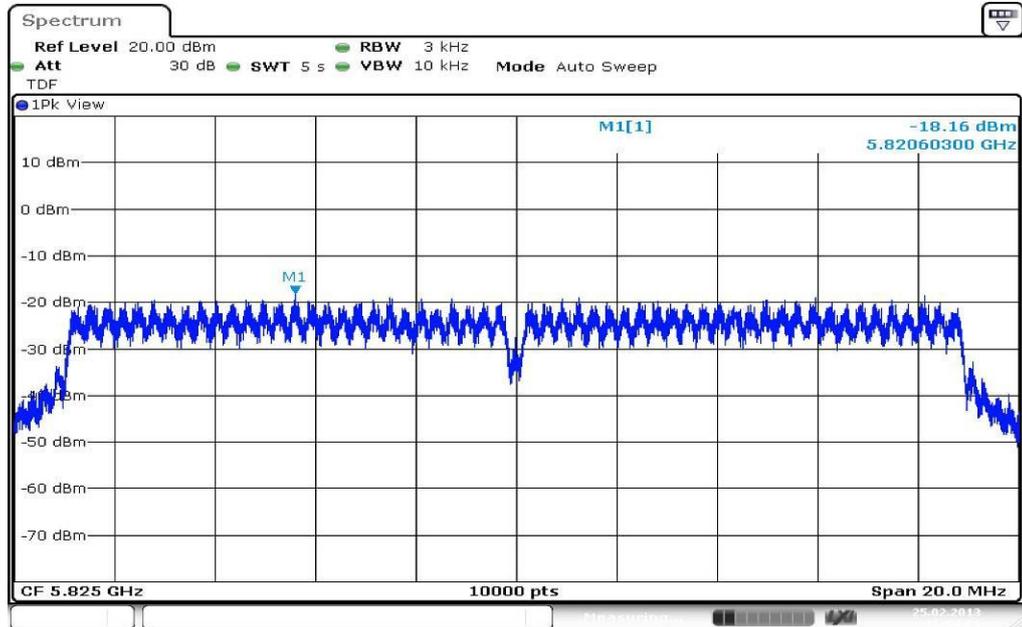


Date: 25.FEB.2013 16:54:24

Plots: OFDM / n – mode HT40

Plot 1: TX mode, lowest channel

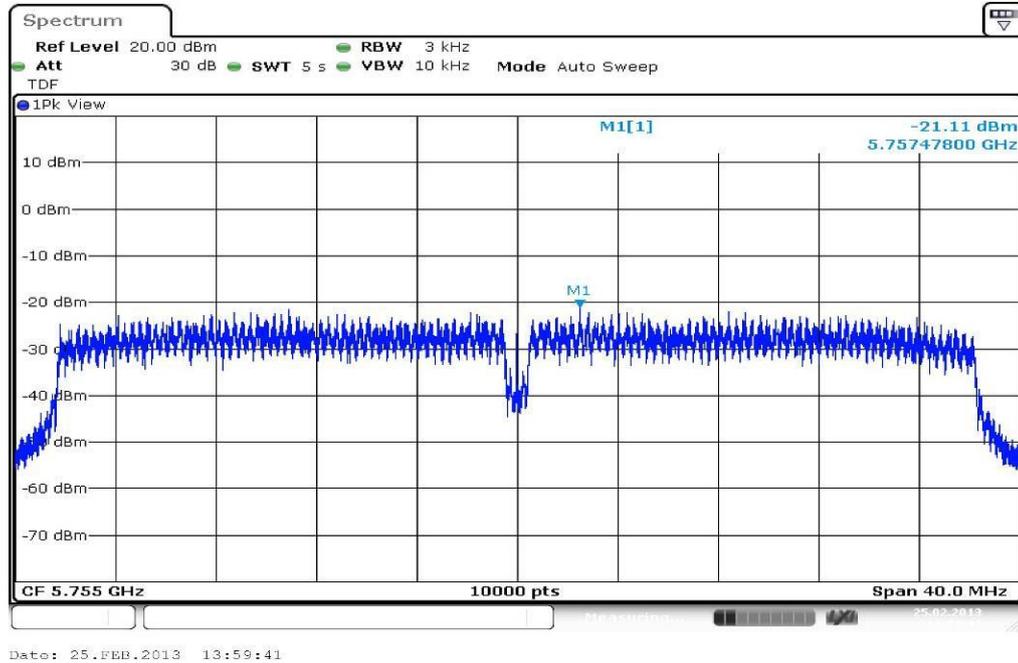

Plot 2: TX mode, highest channel

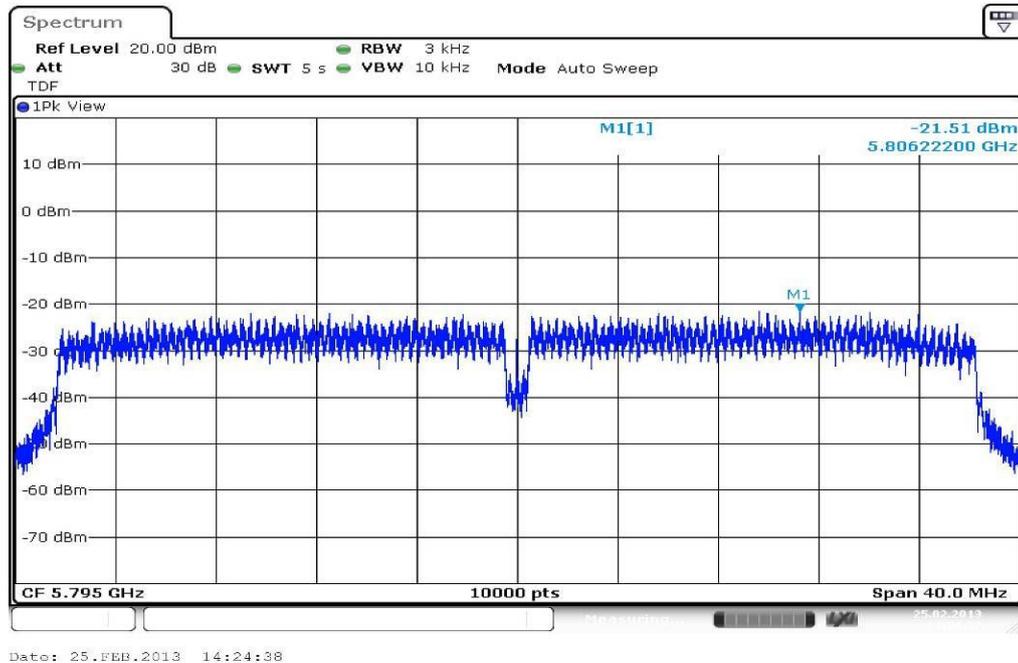

9.5 Spectrum bandwidth – 6 dB

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 - 5% of the DTS BW but not exceed 100 kHz
Video bandwidth:	≥ 3 x RBW
Span:	Complete signal
Trace-Mode:	Max hold (allow trace to stabilize)

Limits:

FCC	IC
Spectrum Bandwidth – 6 dB	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	


Results:

Modulation Frequency	6 dB bandwidth [MHz]		
	Lowest channel	Middle channel	Highest channel
OFDM / a – mode	12.5	12.5	12.5
OFDM / n – mode HT20	13.3	13.4	13.4
OFDM / n – mode HT40	26.2	-/-	26.3
Measurement uncertainty	± RBW		


Result: **Passed**

Plots: OFDM / a – mode


Plot 1: TX mode, lowest channel

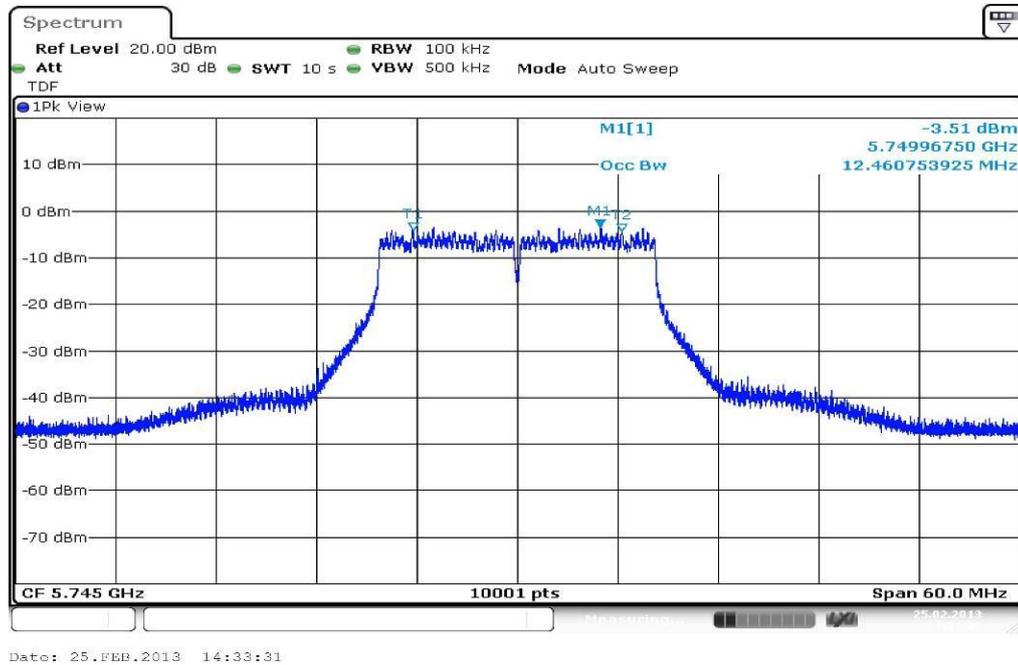

Plot 2: TX mode, middle channel

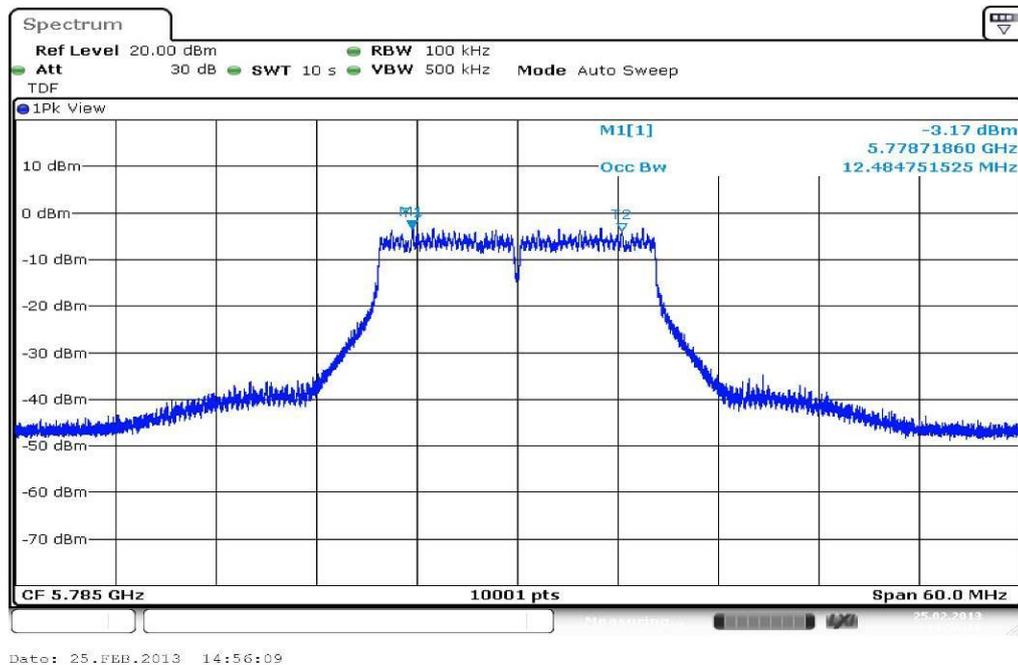


Plot 3: TX mode, highest channel

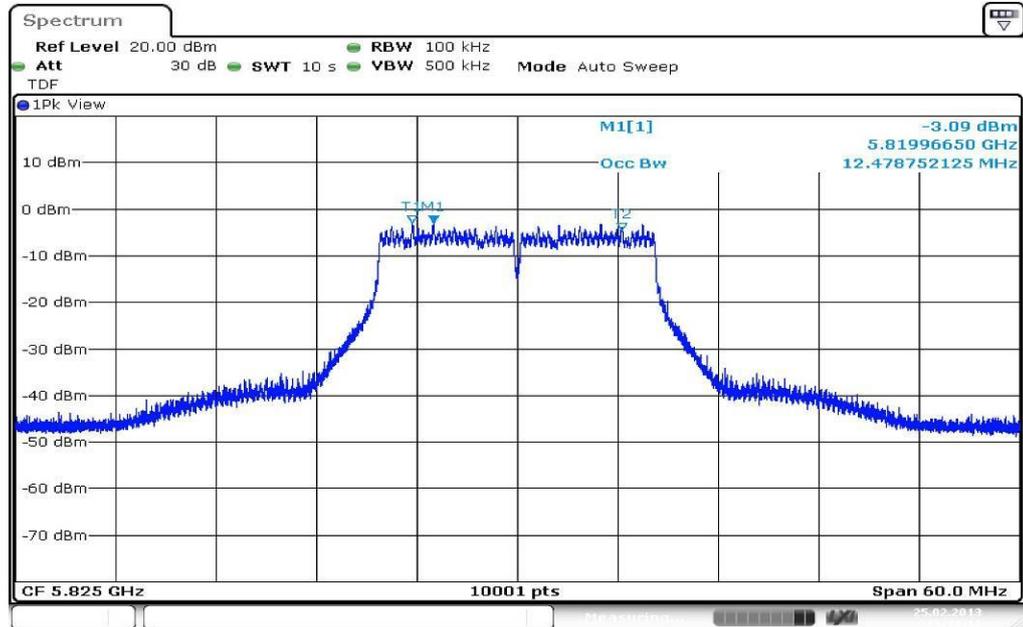


Date: 25.FEB.2013 15:13:13

Plots: OFDM / n – mode HT20


Plot 1: TX mode, lowest channel

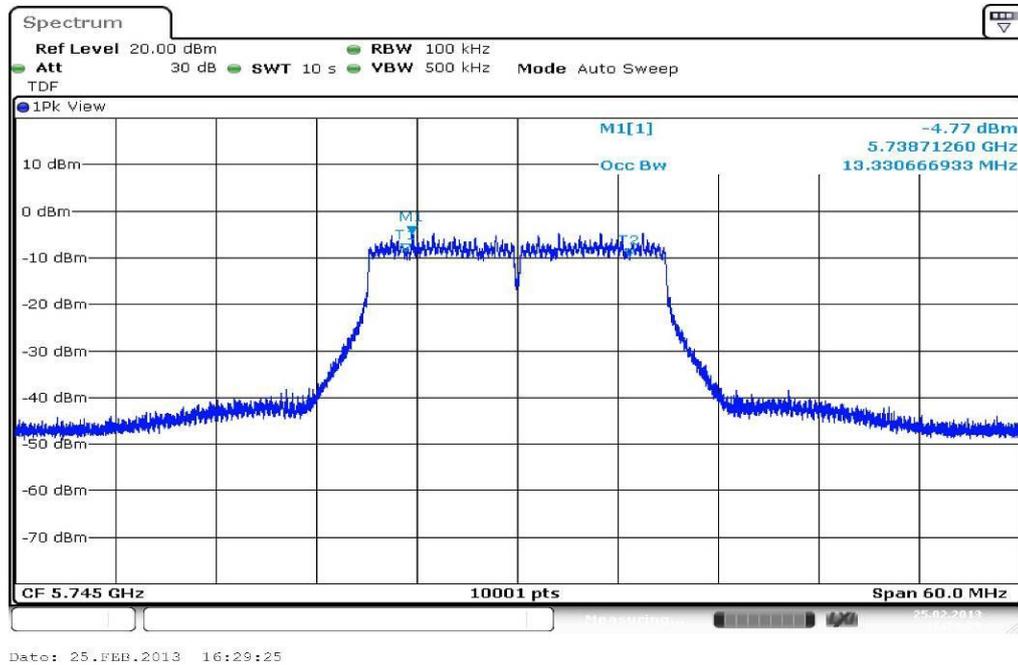

Plot 2: TX mode, middle channel

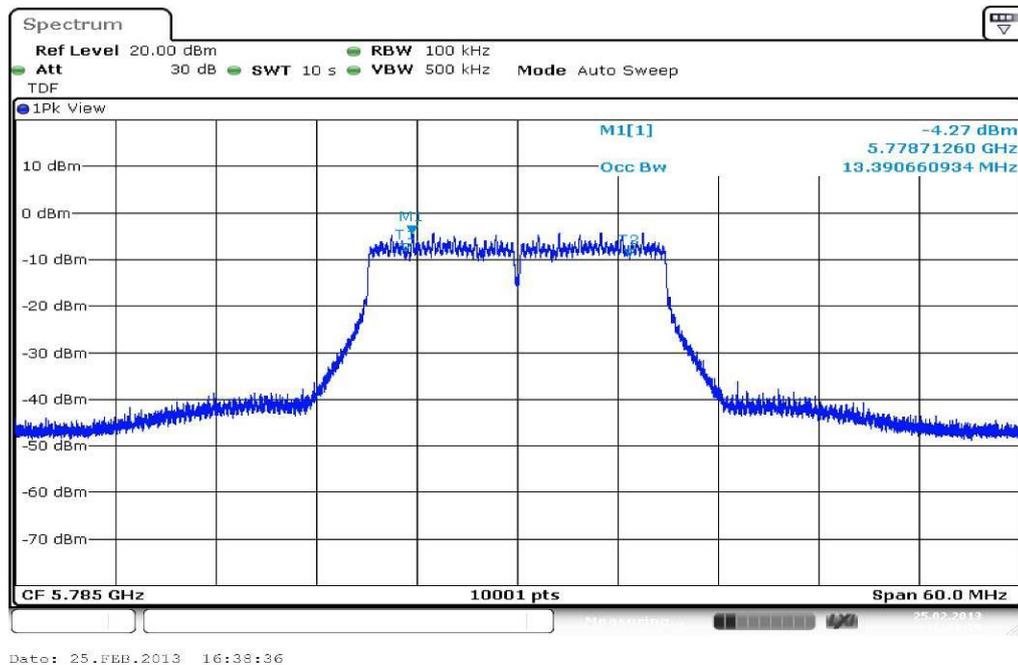


Plot 3: TX mode, highest channel

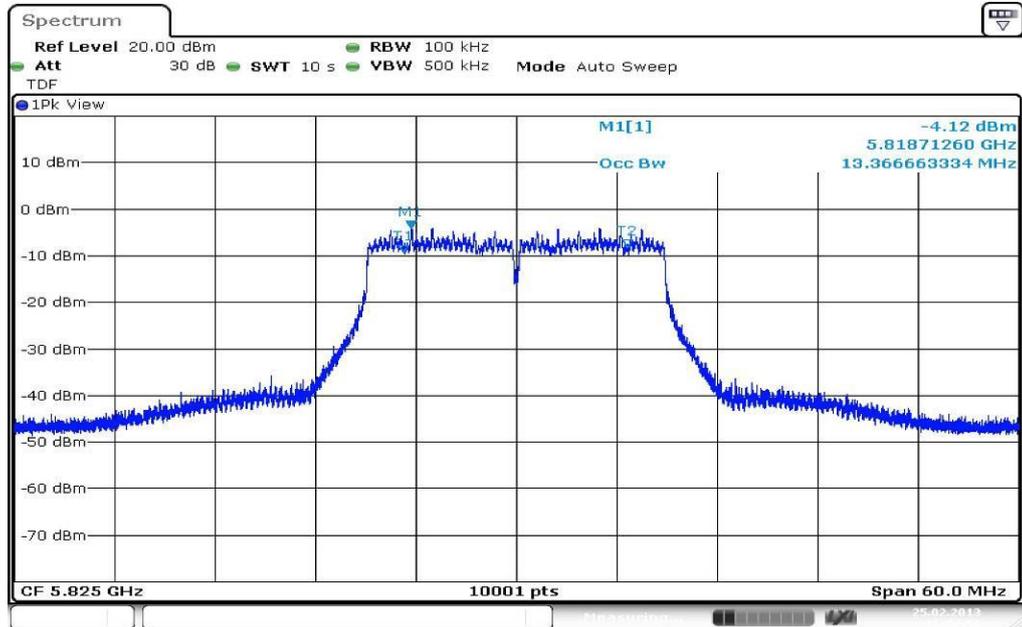


Date: 25.FEB.2013 16:52:59

Plots: OFDM / n – mode HT40

Plot 1: TX mode, lowest channel

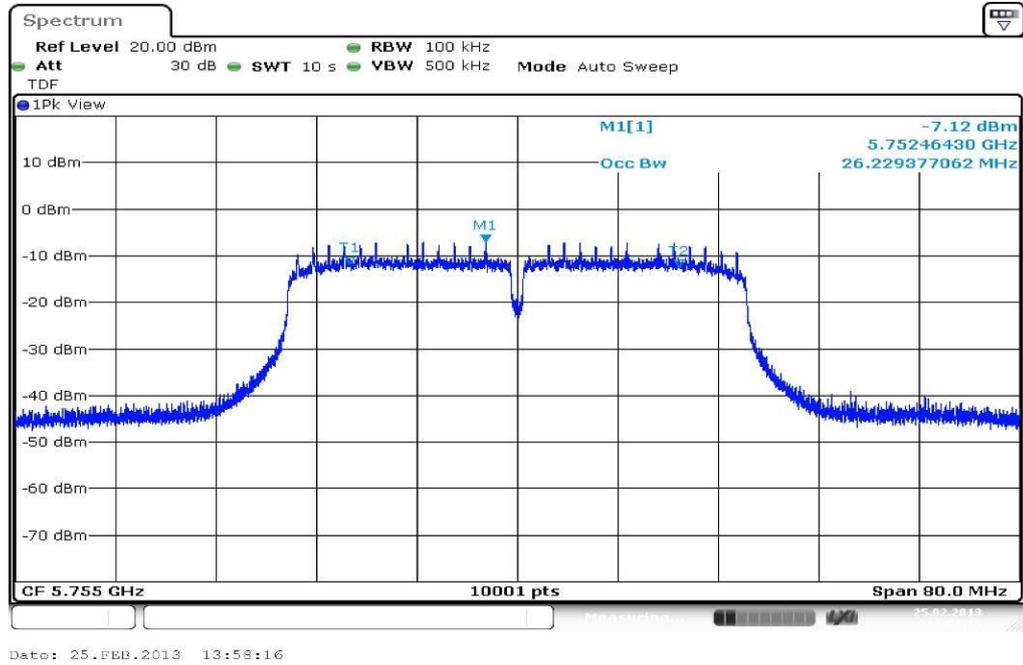

Plot 2: TX mode, highest channel

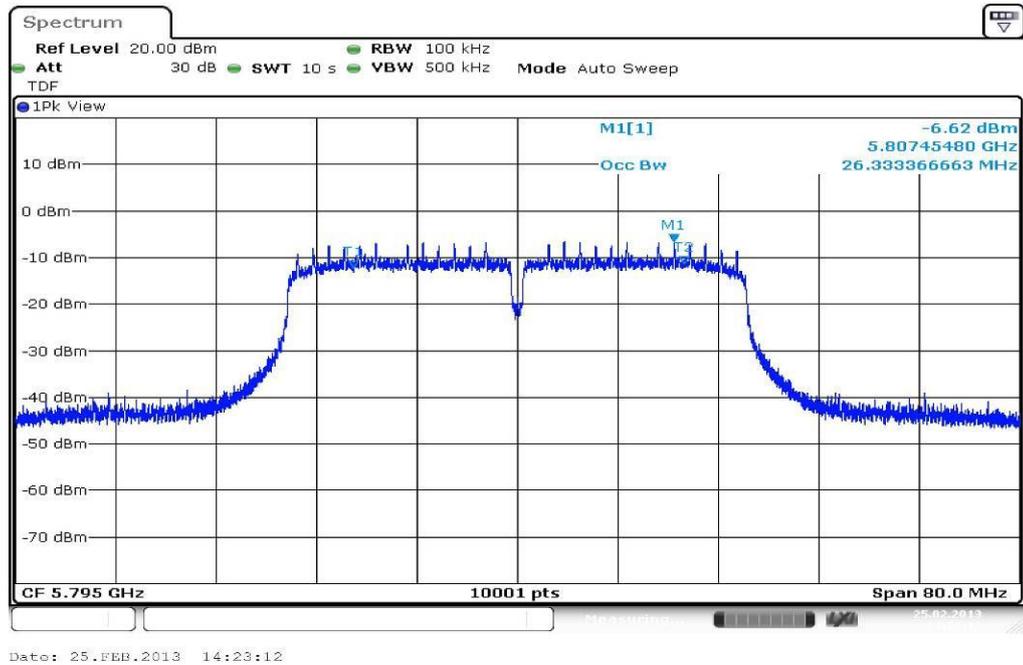

9.6 Spectrum bandwidth – 20 dB

Description:

Measurement of the 20 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 - 5% of the DTS BW but not exceed 100 kHz
Video bandwidth:	≥ 3 x RBW
Span:	Complete signal
Trace-Mode:	Max hold (allow trace to stabilize)

Limits:

FCC	IC
Spectrum Bandwidth – 20 dB	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	


Results:

Modulation Frequency	20 dB bandwidth [MHz]		
	Lowest channel	Middle channel	Highest channel
OFDM / a – mode	16.5	16.5	16.5
OFDM / n – mode HT20	17.7	17.7	17.7
OFDM / n – mode HT40	35.9	-/-	35.9
Measurement uncertainty	± RBW		


Result: Passed

Plots: OFDM / a – mode

Plot 1: TX mode, lowest channel

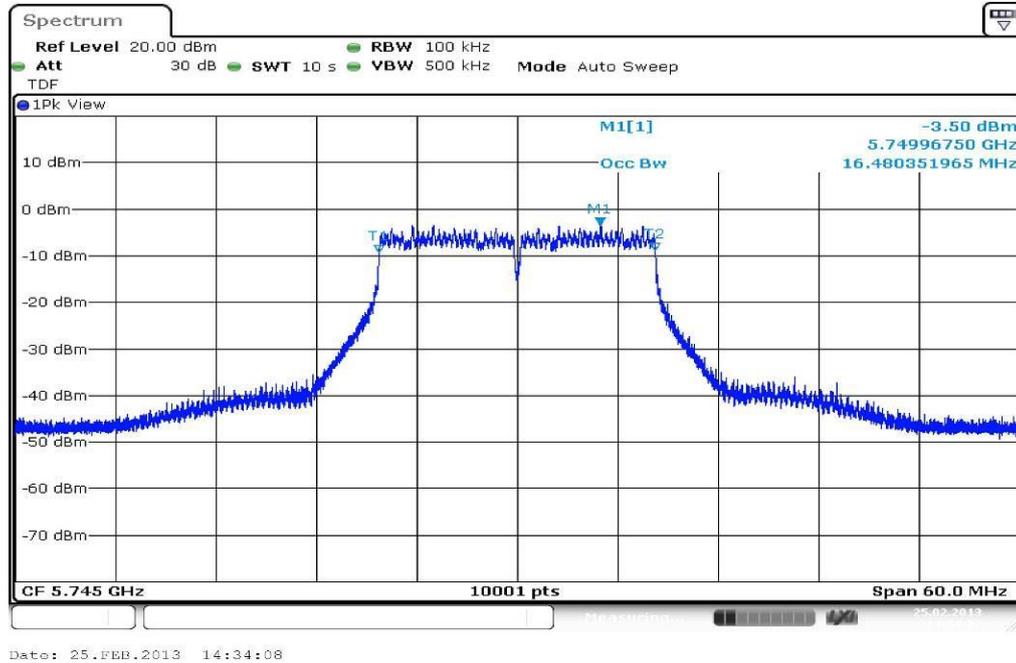


Plot 2: TX mode, middle channel

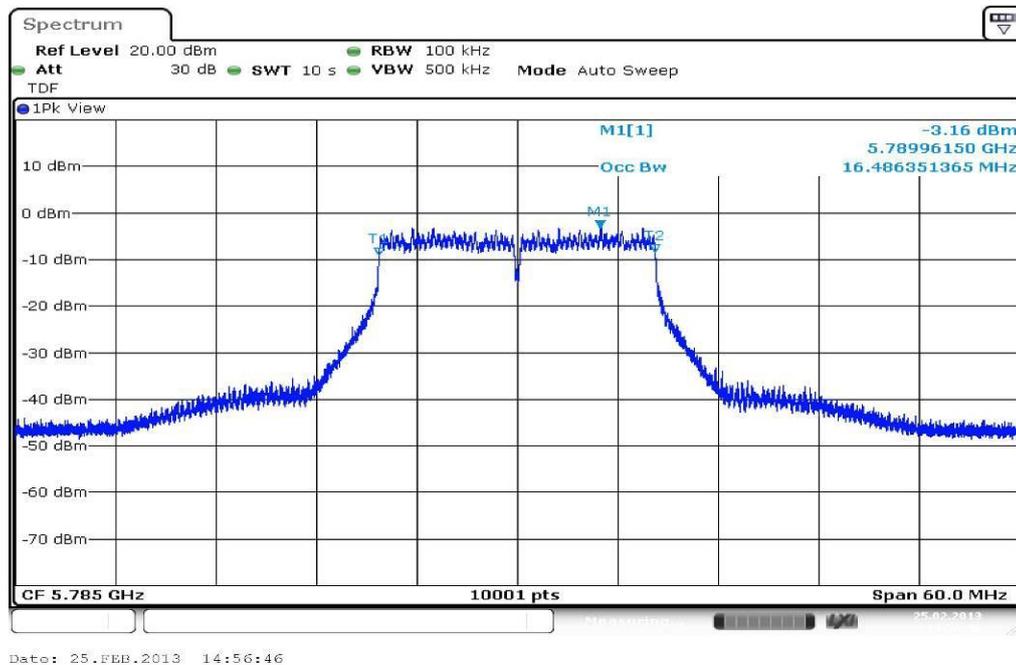


Plots: OFDM / n – mode HT20


Plot 1: TX mode, lowest channel

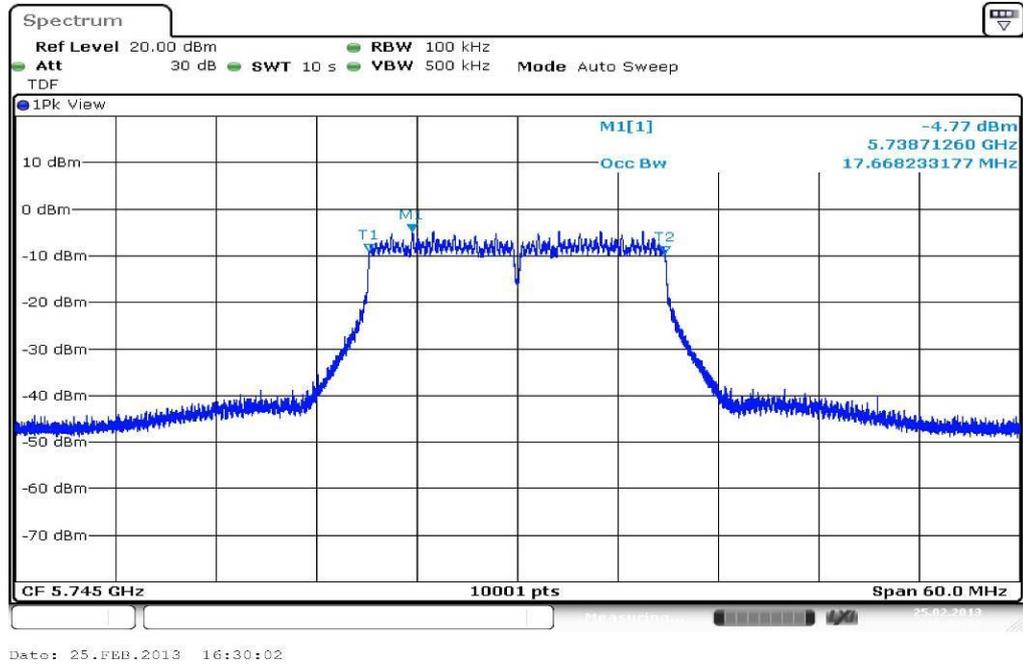

Plot 2: TX mode, middle channel

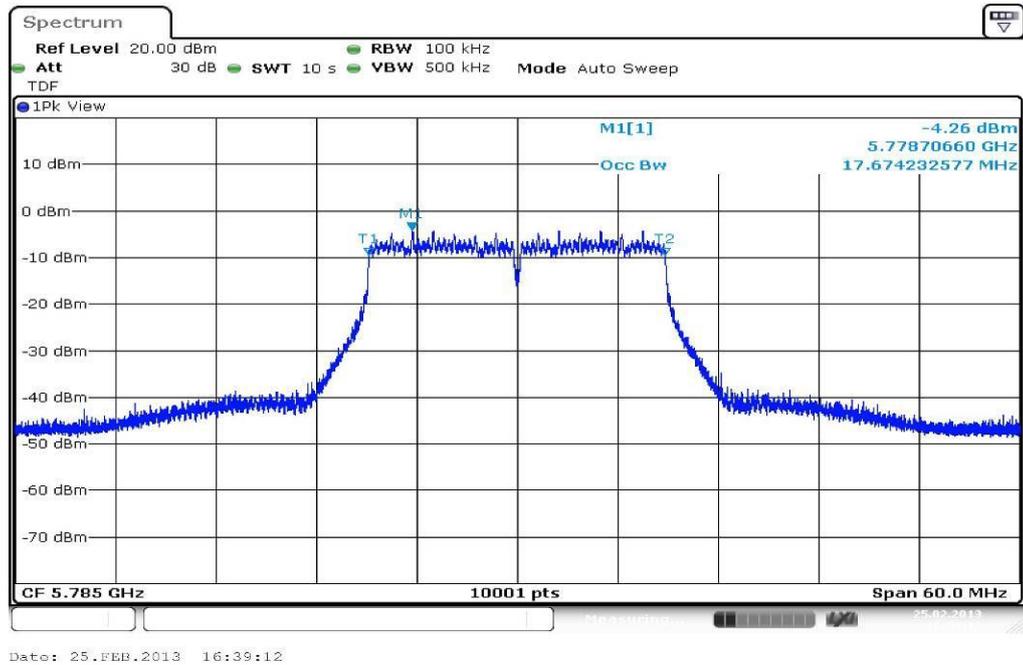


Plot 3: TX mode, highest channel

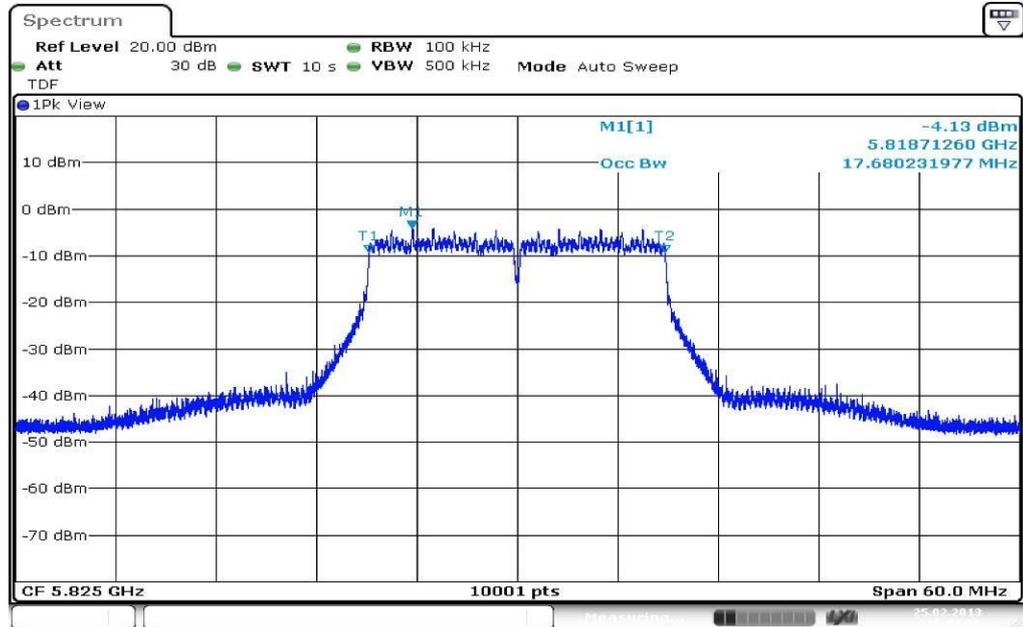


Date: 25.FEB.2013 16:53:36

Plots: OFDM / n – mode HT40

Plot 1: TX mode, lowest channel

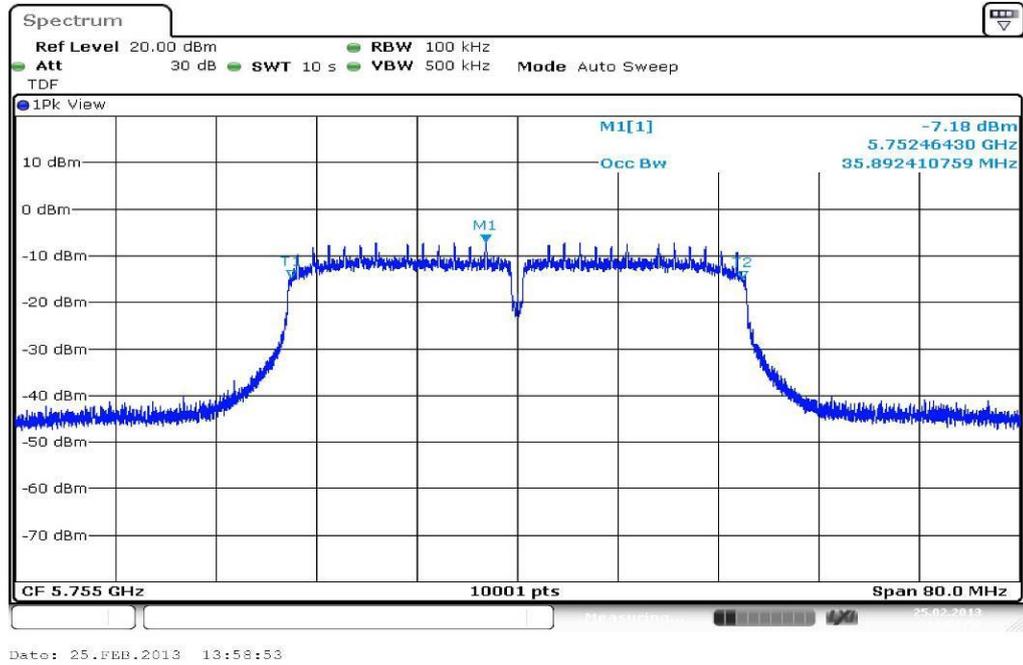

Plot 2: TX mode, highest channel

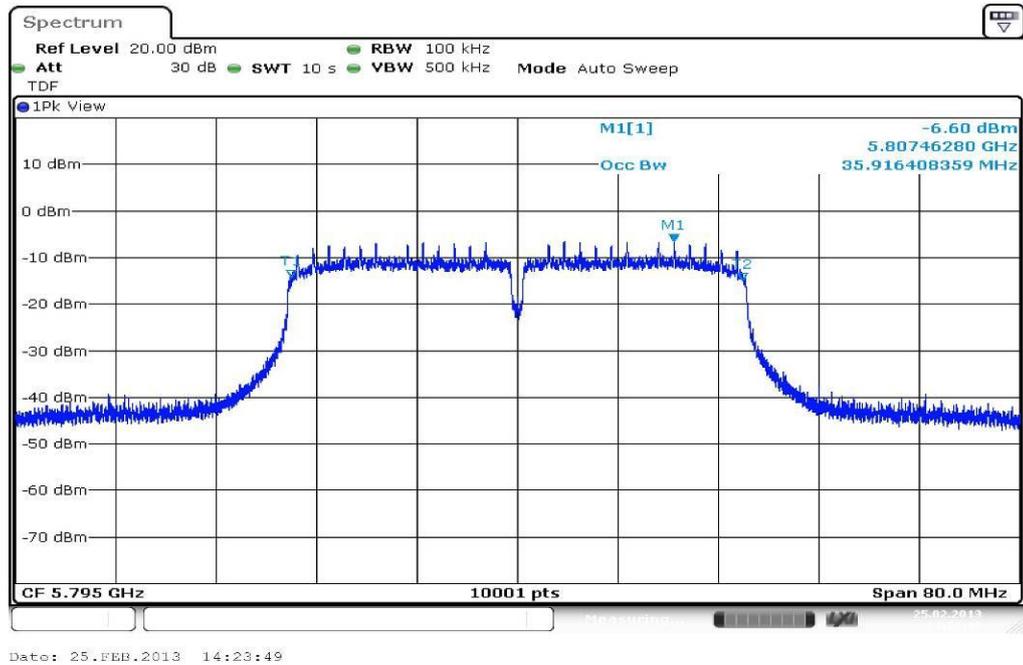

9.7 Band edge compliance conducted

Not applicable! No restricted band close to used band!

9.8 Band edge compliance radiated

Not applicable! No restricted band close to used band!

9.9 TX spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at the lowest, middle and highest channel. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	1s / 100 MHz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Video bandwidth:	F < 1 GHz: 500 kHz F > 1 GHz: 500 kHz
Span:	9 kHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC
TX Spurious Emissions Conducted
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required

Results: OFDM / a – mode

TX Spurious Emissions Conducted					
OFDM / a – mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
5745			30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
5785			30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
5825			30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
Measurement uncertainty		± 3 dB			

Result: Passed

Results: OFDM / n – mode HT20

TX Spurious Emissions Conducted					
OFDM / n – mode HT20					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
5745			30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
5785			30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
5825			30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
Measurement uncertainty		± 3 dB			

Result: Passed


Results: OFDM / n – mode HT40

TX Spurious Emissions Conducted					
OFDM / n – mode HT40					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
5755			30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
5785			30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the -20 dBc criteria.			-20 dBc (peak) -30 dBc (average)		complies
			30 dBm		Operating frequency
-/-			-20 dBc (peak) -30 dBc (average)		-/-
Measurement uncertainty		± 3 dB			

Result: Passed


Plots: OFDM / a – mode

Plot 1: TX mode, lowest channel, up to 40 GHz

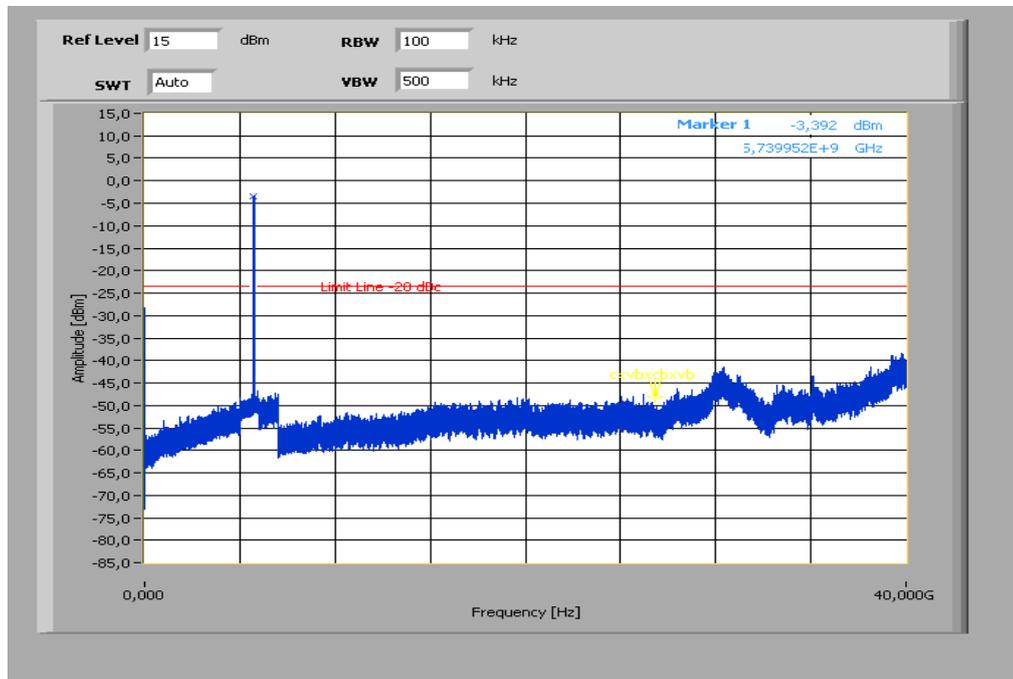


The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, middle channel, up to 40 GHz

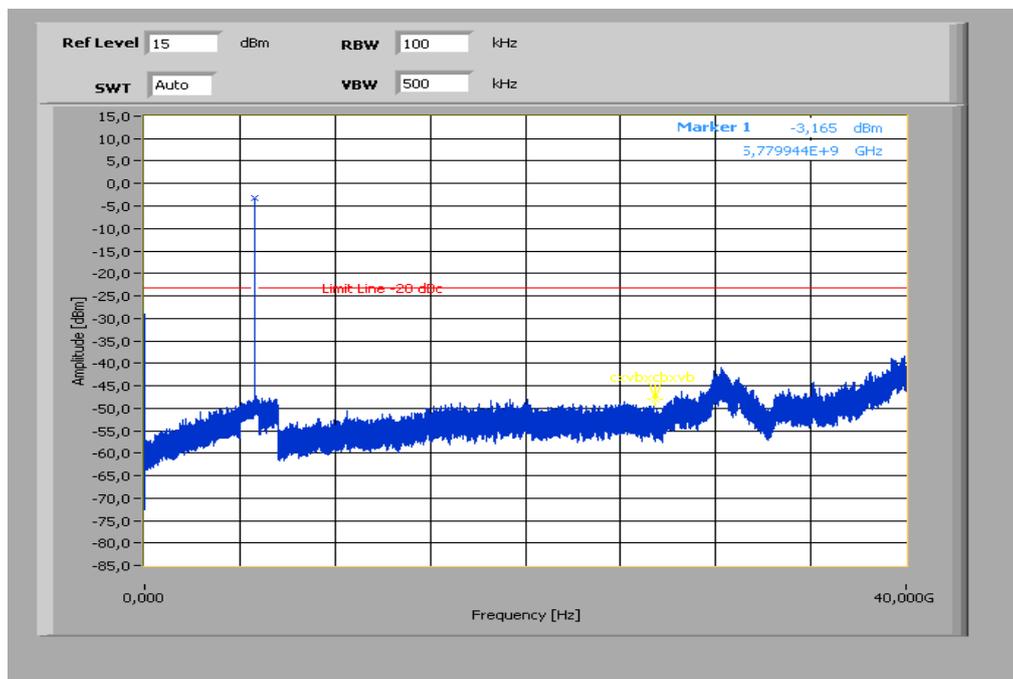

The peak at the beginning of the plot is the LO from the SA.


Plot 3: TX mode, highest channel, up to 40 GHz

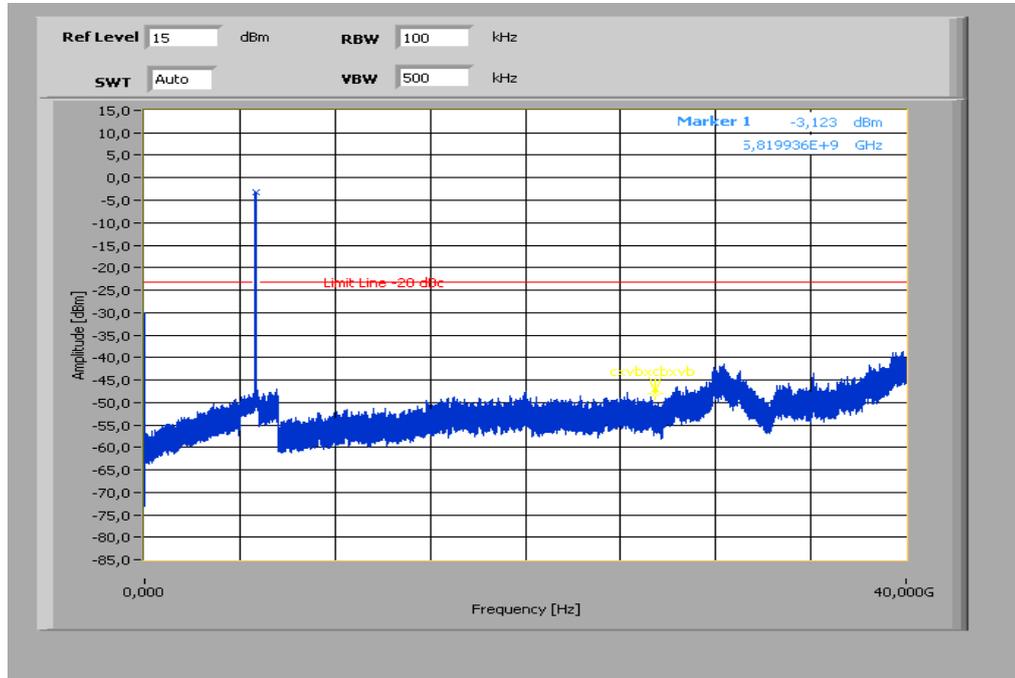

The peak at the beginning of the plot is the LO from the SA.


Plots: OFDM / n – mode HT20

Plot 1: TX mode, lowest channel, up to 40 GHz

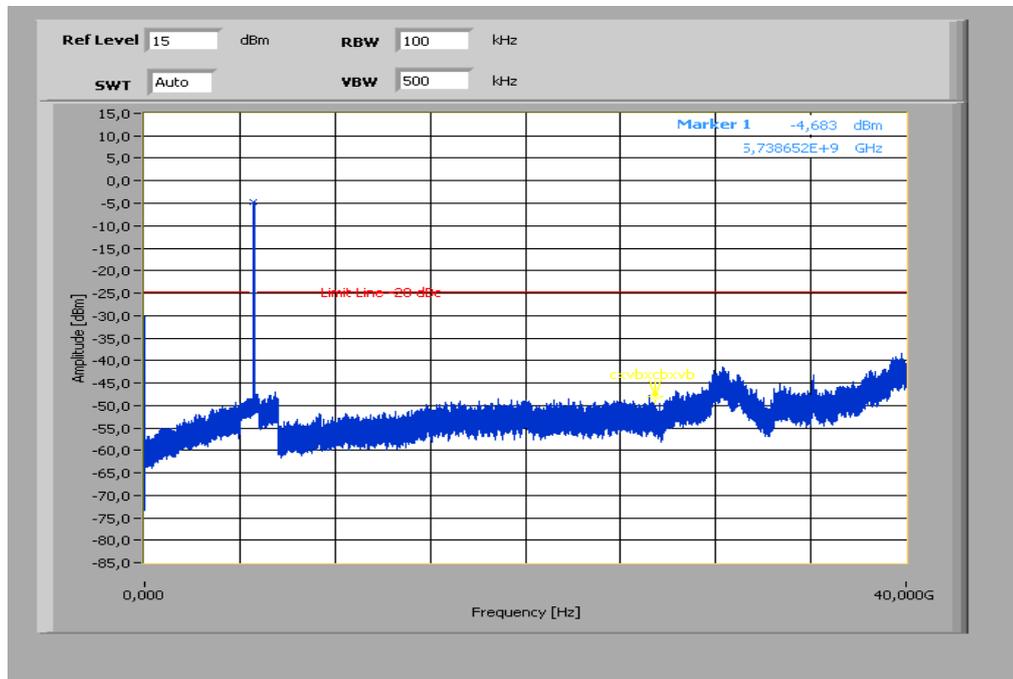


The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, middle channel, up to 40 GHz

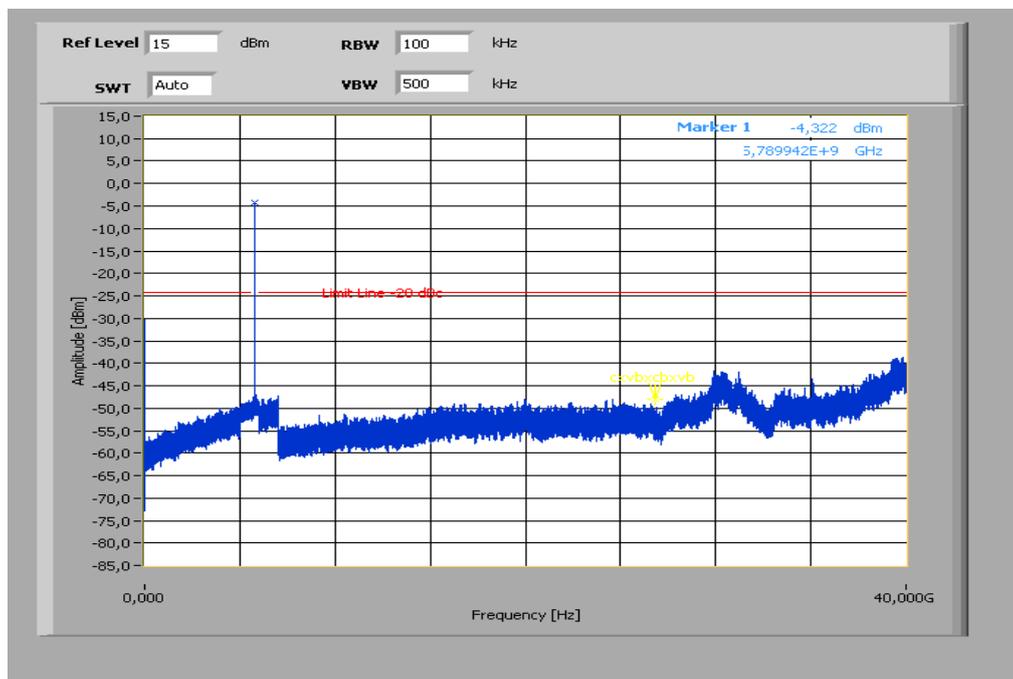

The peak at the beginning of the plot is the LO from the SA.


Plot 3: TX mode, highest channel, up to 40 GHz

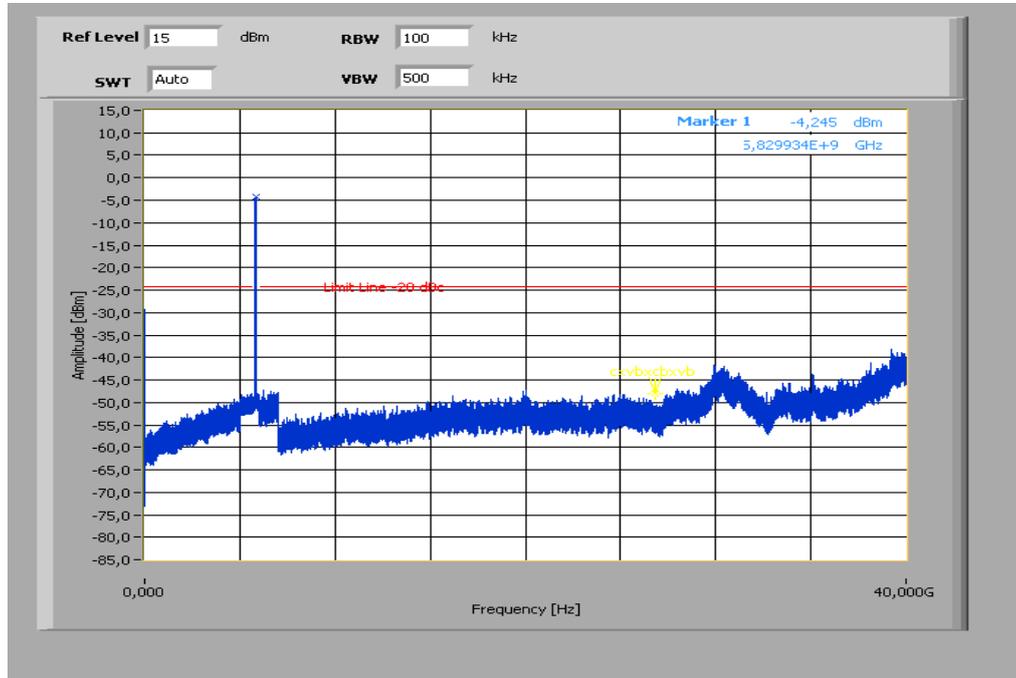

The peak at the beginning of the plot is the LO from the SA.


Plots: OFDM / n – mode HT40

Plot 1: TX mode, lowest channel, up to 40 GHz

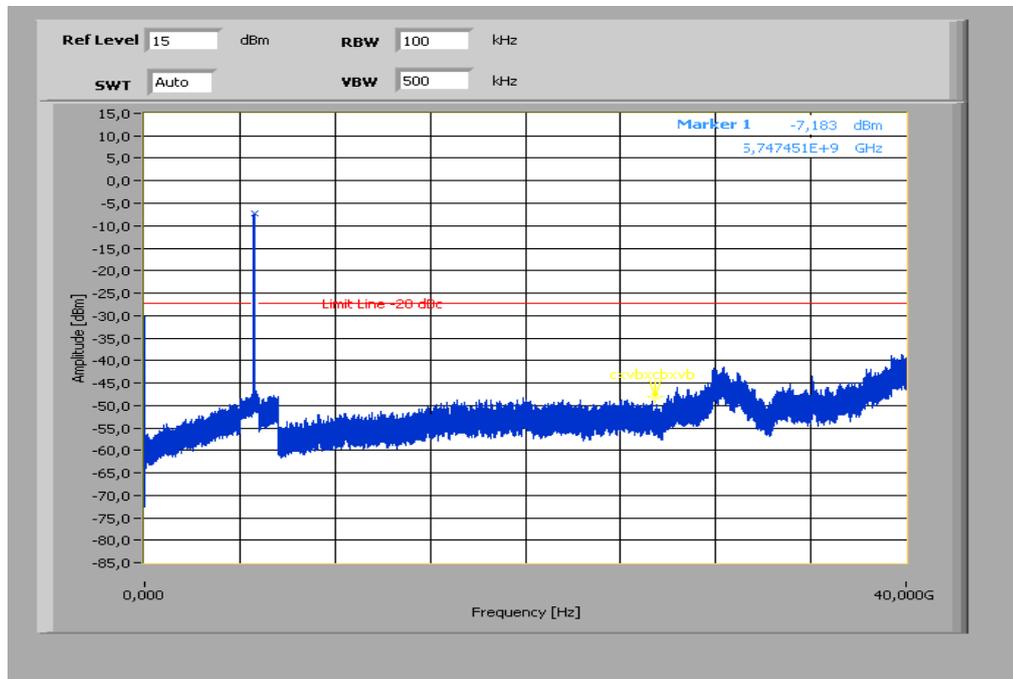

The peak at the beginning of the plot is the LO from the SA.

Plot 2: TX mode, highest channel, up to 40 GHz

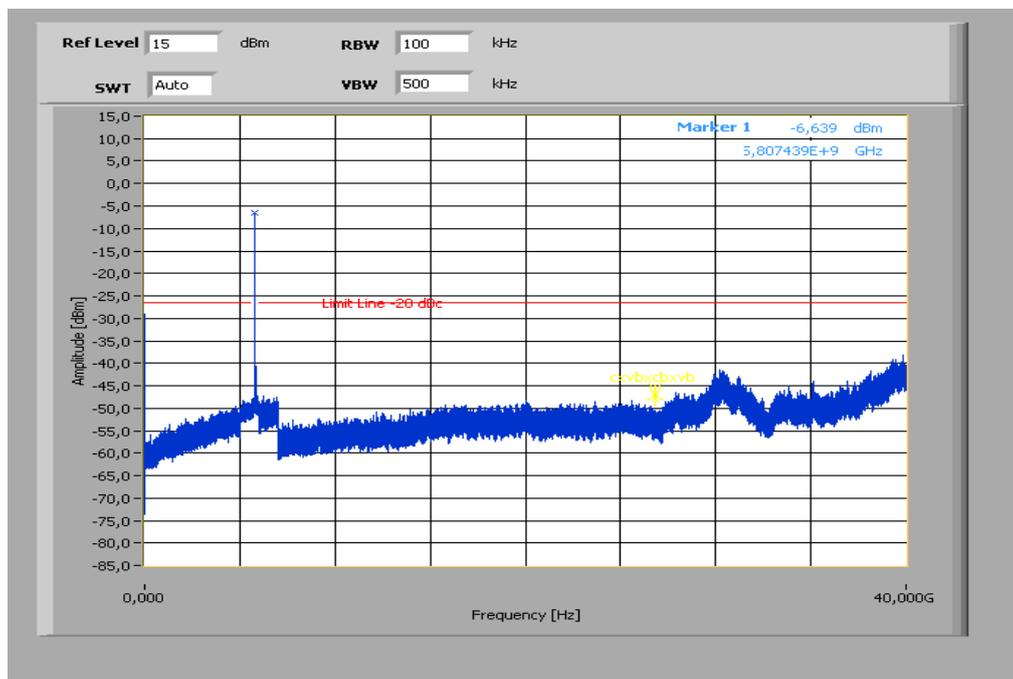

The peak at the beginning of the plot is the LO from the SA.

9.10 TX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at the lowest, middle and highest channel. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	F > 1 GHz: 1 MHz F < 1 GHz: 100 kHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz / 3 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold
Measured Modulation	<input checked="" type="checkbox"/> OFDM a – mode <input checked="" type="checkbox"/> OFDM n – mode HT20 <input checked="" type="checkbox"/> OFDM n – mode HT40

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

Limits:

FCC		
TX Spurious Emissions Radiated		
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results: OFDM / a – mode

TX Spurious Emissions Radiated [dBµV/m]								
OFDM / a – mode								
5745 MHz			5785 MHz			5825 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
Measurement uncertainty			± 3 dB					

Result: Passed

Results: OFDM / n – mode HT20

TX Spurious Emissions Radiated [dBµV/m]								
OFDM / n – mode HT20								
5745 MHz			5785 MHz			5825 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
Measurement uncertainty			± 3 dB					

Result: Passed

Results: OFDM / n – mode HT40

TX Spurious Emissions Radiated [dBµV/m]								
OFDM / n – mode HT40								
5755 MHz			5795 MHz			-/-		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			-/-		
Measurement uncertainty			± 3 dB					

Result: Passed

Note: Results of OFDM n – mode are added to show the compliance with the standard.

Plots: OFDM / n – mode HT20

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0320--BV
 Serial Number: CB5A1NUBMJ
 Test Description: FCC part 15 B class B @ 10 m
 Operating Conditions: W-LAN n-mode CH149 + charging
 Operator Name: Medrow
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESC1 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

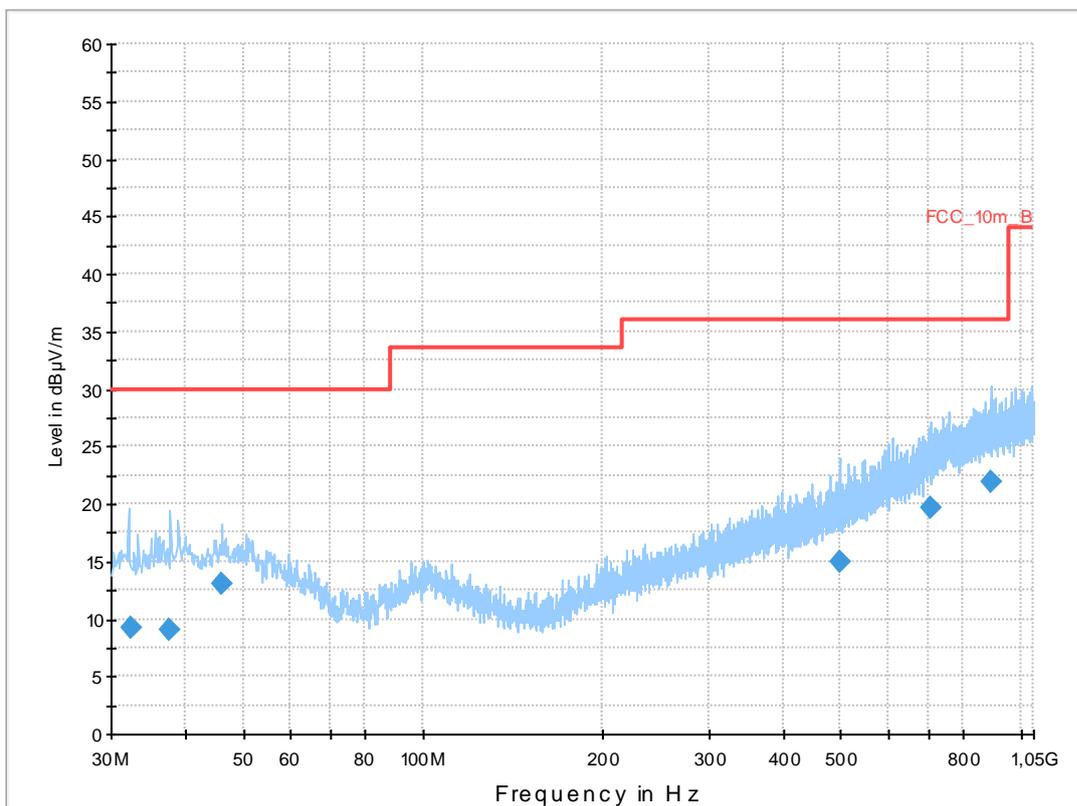


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
32.519250	9.1	1000.0	120.000	170.0	V	178.0	12.8	20.9	30.0	
37.583700	9.0	1000.0	120.000	170.0	V	190.0	13.2	21.0	30.0	
45.970800	13.0	1000.0	120.000	98.0	V	-10.0	13.3	17.0	30.0	
496.710000	15.0	1000.0	120.000	143.0	H	261.0	18.6	21.0	36.0	
706.460400	19.6	1000.0	120.000	170.0	H	80.0	22.7	16.4	36.0	
893.092650	22.0	1000.0	120.000	170.0	H	280.0	25.1	14.0	36.0	

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

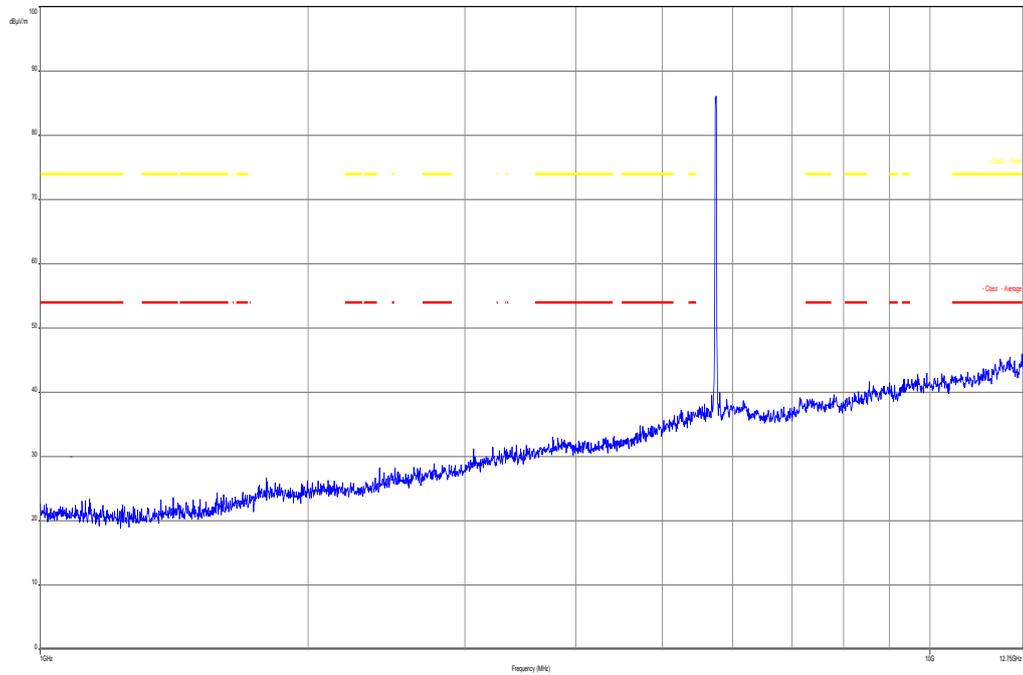


Plot 3: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

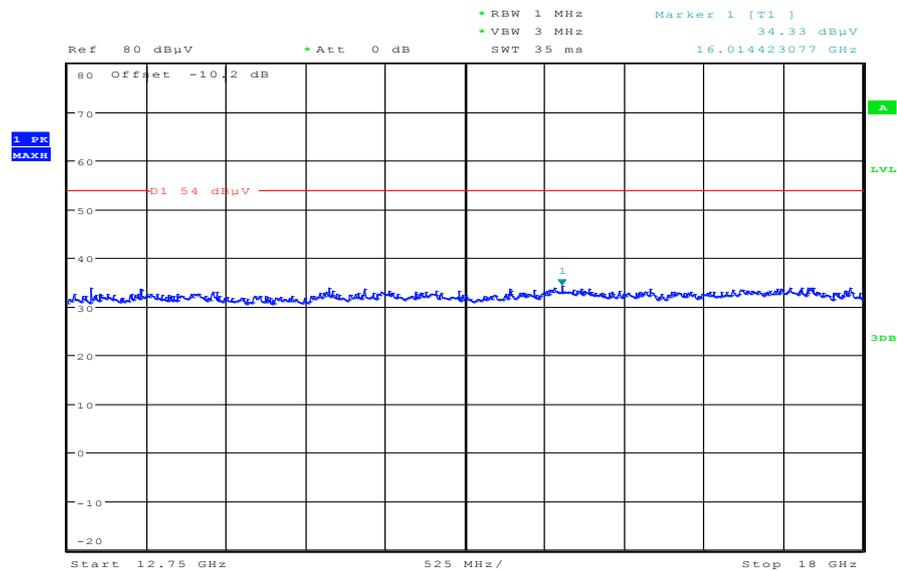


Date: 7.MAR.2013 08:23:05

Plot 4: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

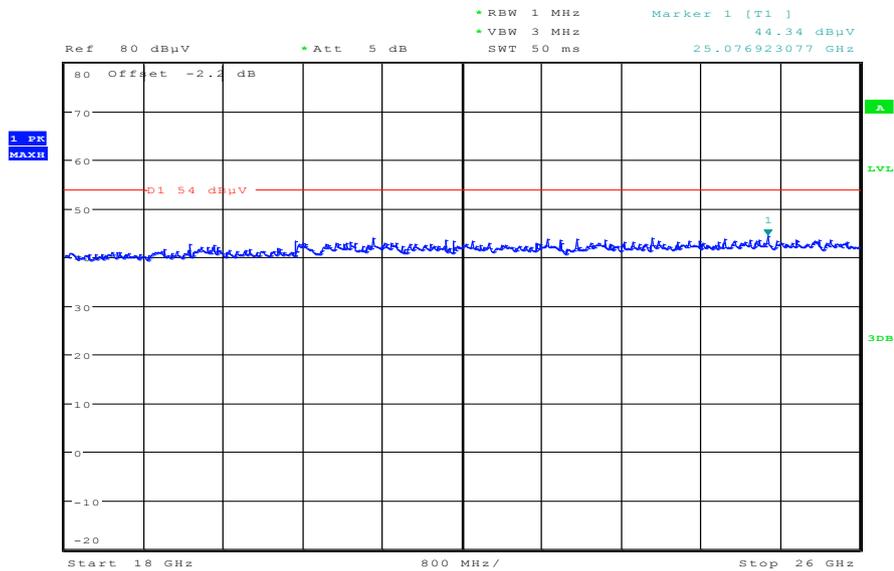

Date: 7.MAR.2013 09:25:10

Plot 5: Lowest channel, 26 GHz to 40 GHz, vertical & horizontal polarization

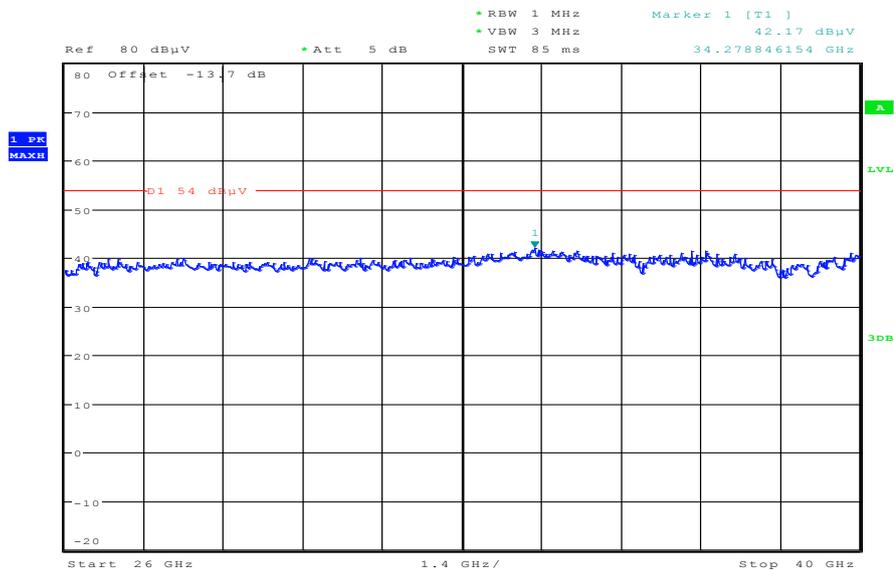

Date: 7.MAR.2013 09:35:04

Plot 6: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0320--BV
 Serial Number: CB5A1NUBMJ
 Test Description: FCC part 15 B class B @ 10 m
 Operating Conditions: W-LAN n-mode CH157 + charging
 Operator Name: Medrow
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESC1 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

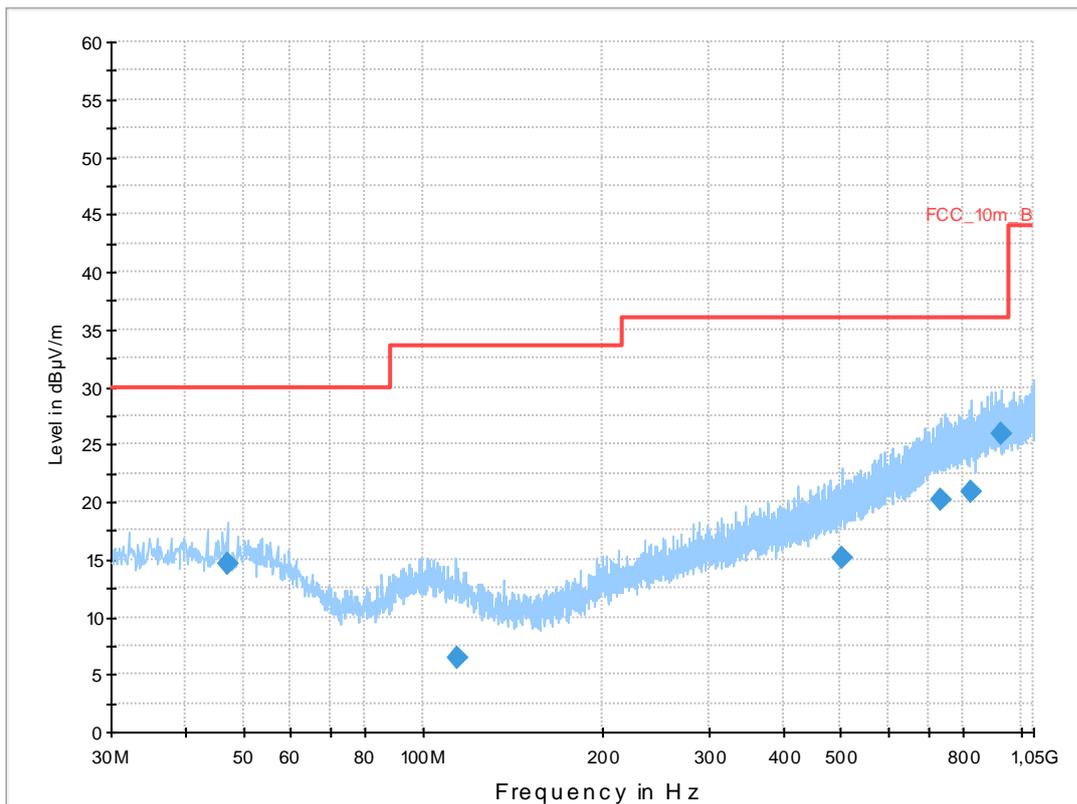


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
47.003250	14.5	1000.0	120.000	98.0	V	100.0	13.3	15.5	30.0	
113.668200	6.5	1000.0	120.000	98.0	V	10.0	10.7	27.0	33.5	
502.395600	15.1	1000.0	120.000	120.0	H	261.0	18.7	20.9	36.0	
732.798150	20.1	1000.0	120.000	162.0	V	170.0	23.3	15.9	36.0	
825.491400	20.9	1000.0	120.000	133.0	H	190.0	24.2	15.1	36.0	
927.425550	25.9	1000.0	120.000	98.0	V	10.0	25.3	10.1	36.0	

Plot 7: Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

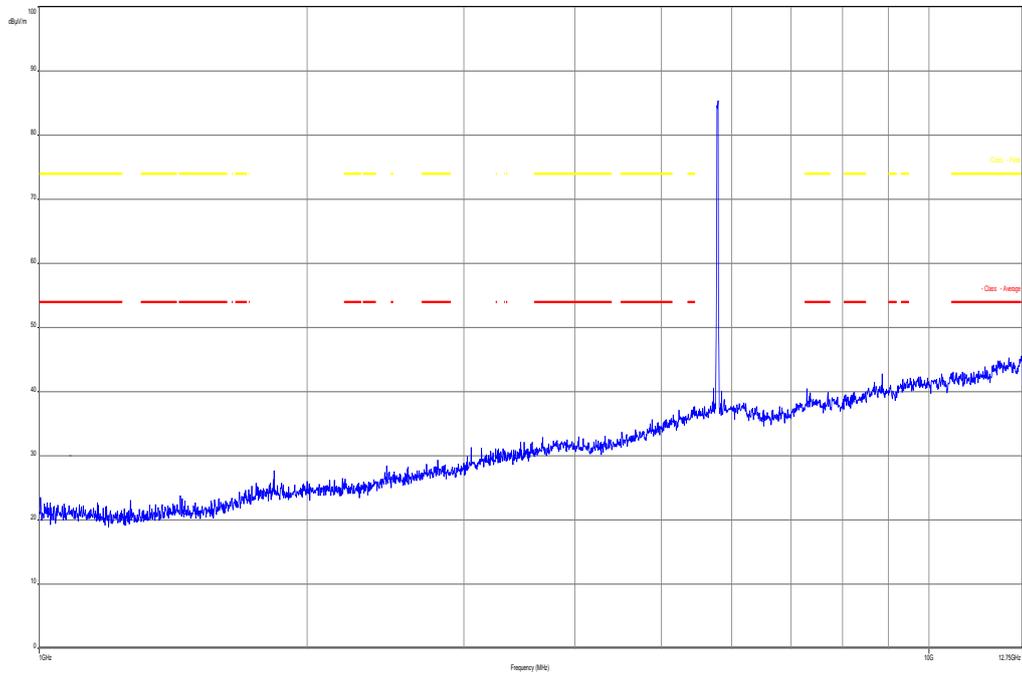


Plot 8: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

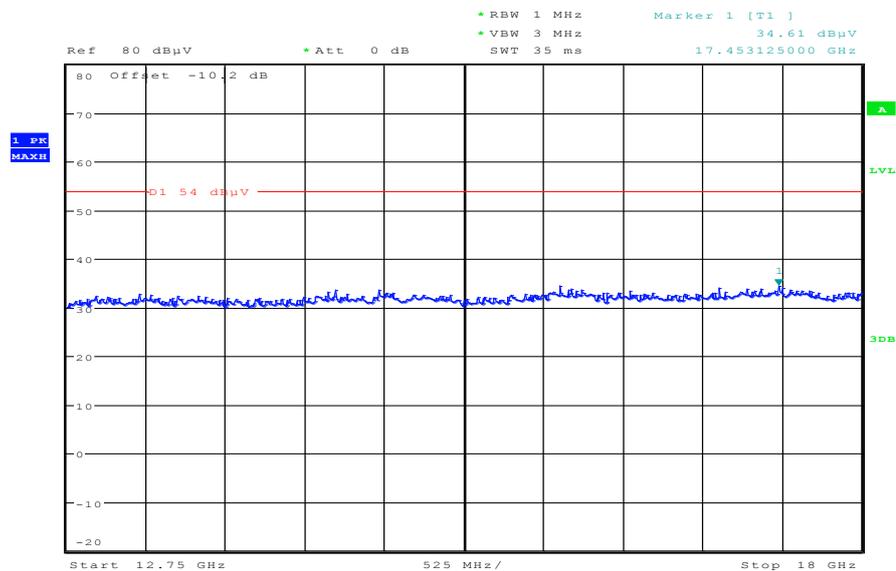


Date: 7.MAR.2013 08:24:07

Plot 9: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

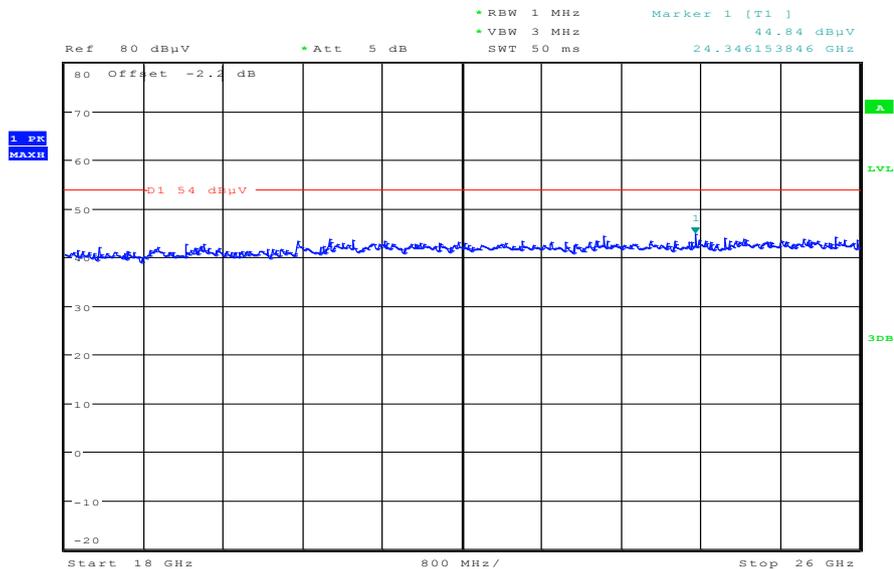

Date: 7.MAR.2013 09:25:55

Plot 10: Middle channel, 26 GHz to 40 GHz, vertical & horizontal polarization

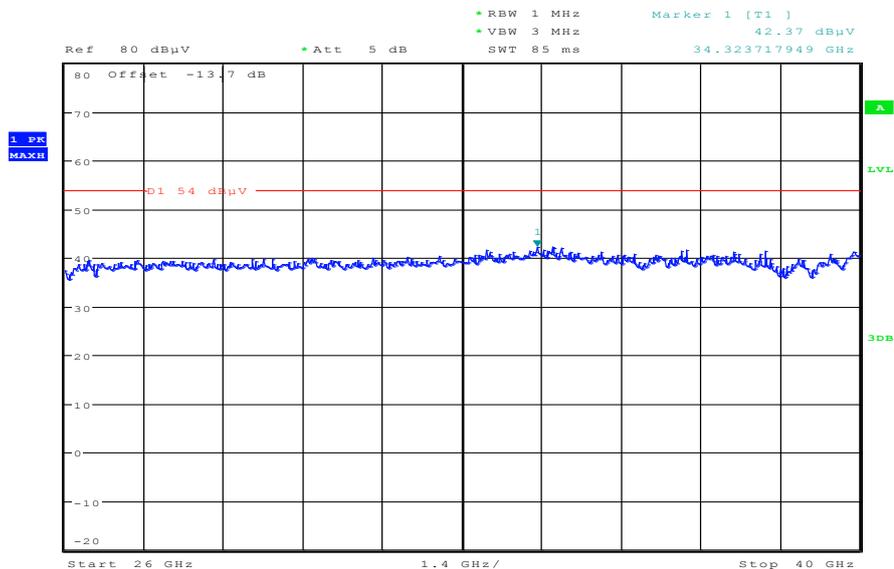

Date: 7.MAR.2013 09:33:57

Plot 11: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0320--BV
 Serial Number: CB5A1NUBMJ
 Test Description: FCC part 15 B class B @ 10 m
 Operating Conditions: W-LAN n-mode CH165 + charging
 Operator Name: Medrow
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESC1 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

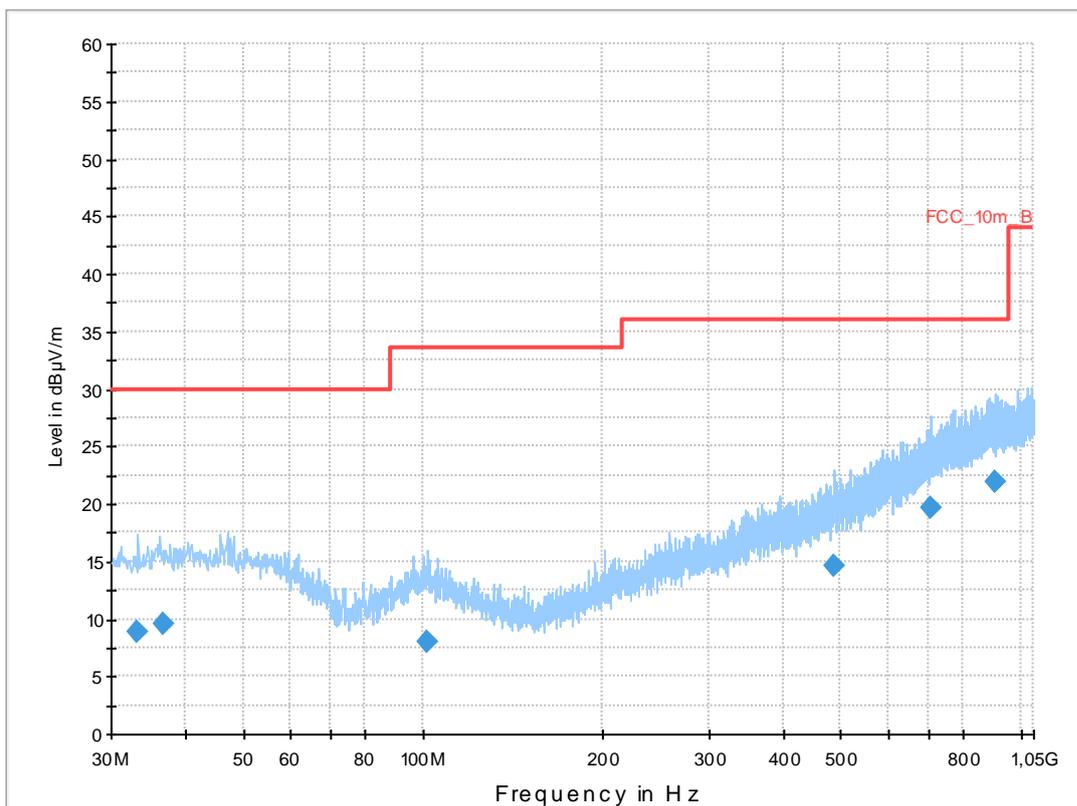


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
33.228150	8.9	1000.0	120.000	105.0	H	260.0	12.8	21.1	30.0	
36.590250	9.6	1000.0	120.000	155.0	H	273.0	13.2	20.4	30.0	
101.644500	8.0	1000.0	120.000	170.0	V	170.0	11.8	25.5	33.5	
487.742100	14.7	1000.0	120.000	170.0	V	-10.0	18.5	21.3	36.0	
708.858900	19.7	1000.0	120.000	170.0	V	280.0	22.7	16.3	36.0	
907.667700	21.9	1000.0	120.000	170.0	V	100.0	25.2	14.1	36.0	

Plot 12: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

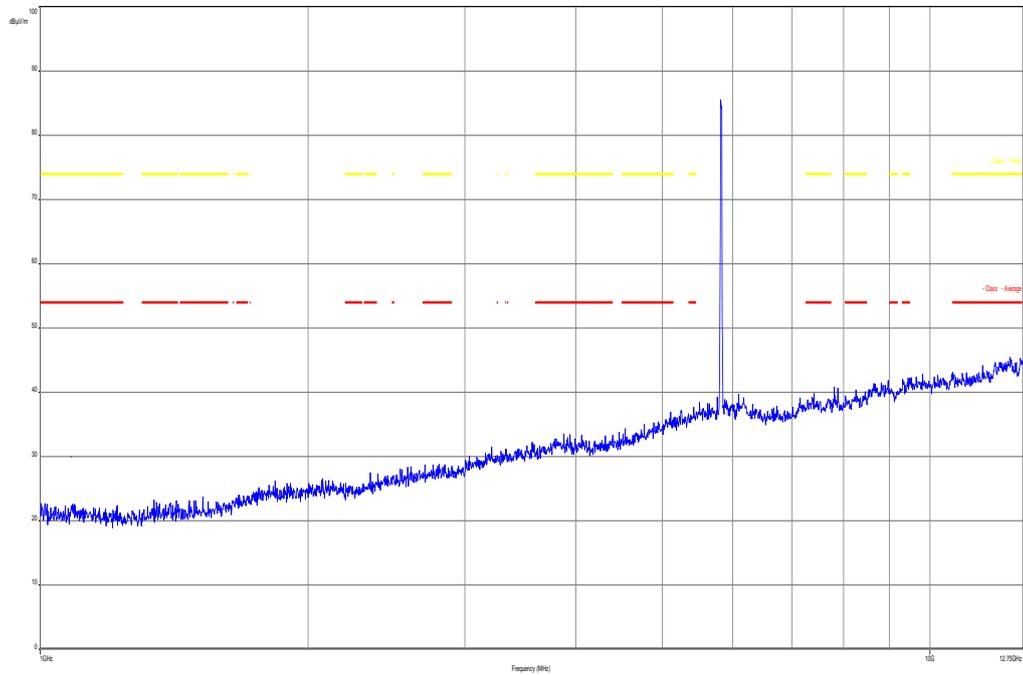


Plot 13: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

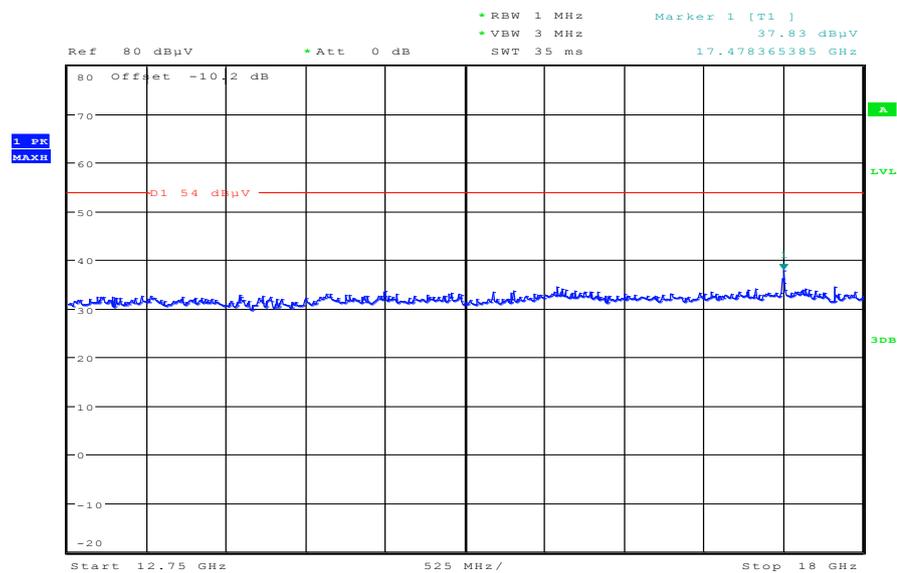


Date: 7.MAR.2013 08:25:11

Plot 14: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

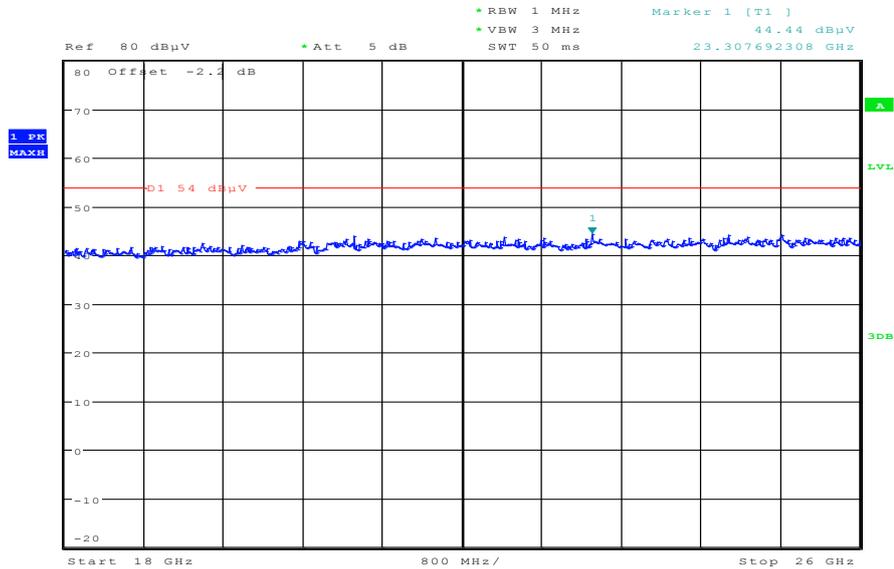

Date: 7.MAR.2013 09:27:00

Plot 15: Highest channel, 26 GHz to 40 GHz, vertical & horizontal polarization

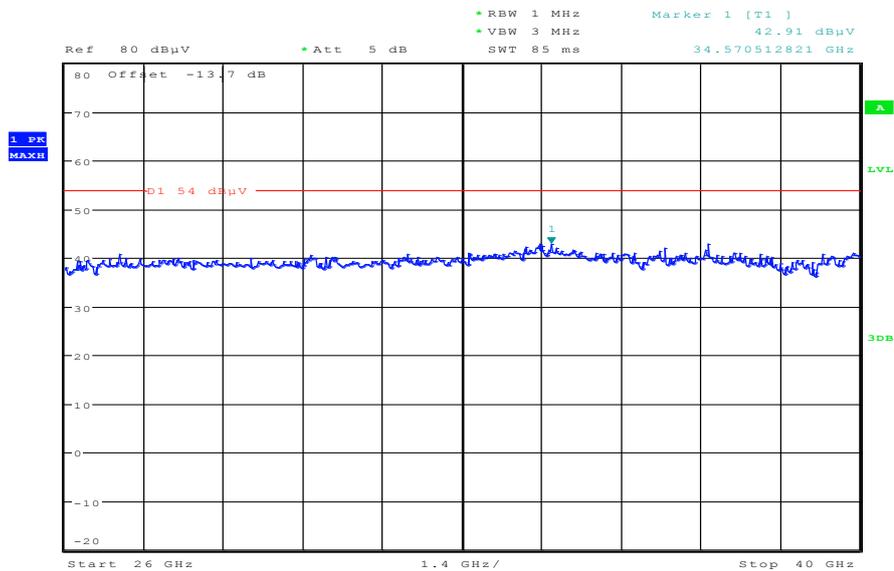

Date: 7.MAR.2013 09:32:32

Plots: OFDM / n – mode HT40

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0320--BV
 Serial Number: CB5A1NUBMJ
 Test Description: FCC part 15 B class B @ 10 m
 Operating Conditions: WLAN HT40 mode CH 151 + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESC1 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

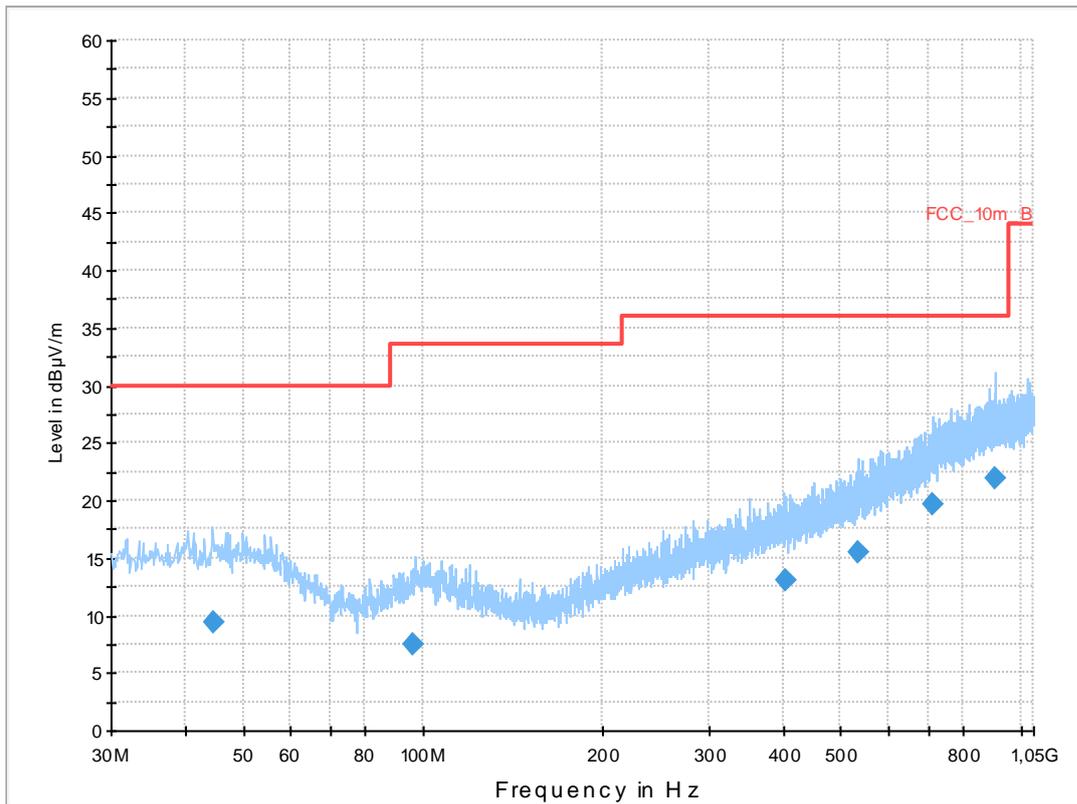


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
44.600550	9.4	1000.0	120.000	153.0	H	90.0	13.3	20.6	30.0	
96.402150	7.6	1000.0	120.000	98.0	V	280.0	11.4	25.9	33.5	
404.019900	13.0	1000.0	120.000	170.0	H	3.0	17.0	23.0	36.0	
534.549300	15.5	1000.0	120.000	170.0	H	190.0	19.2	20.5	36.0	
712.467150	19.6	1000.0	120.000	170.0	H	280.0	22.8	16.4	36.0	
908.054700	21.9	1000.0	120.000	170.0	V	273.0	25.2	14.1	36.0	

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

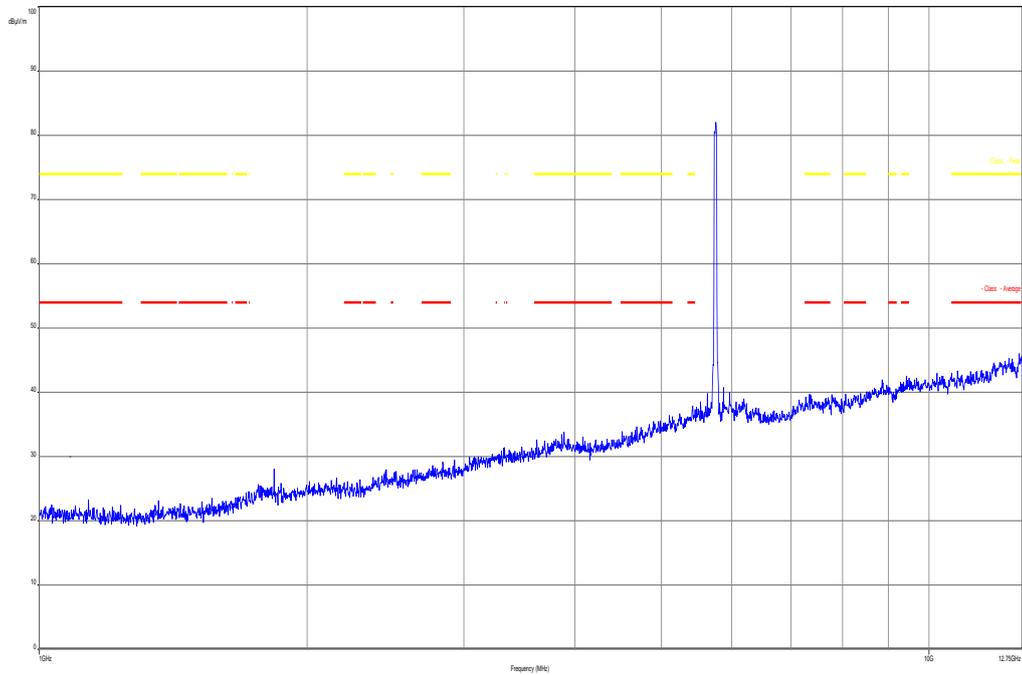


Plot 3: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

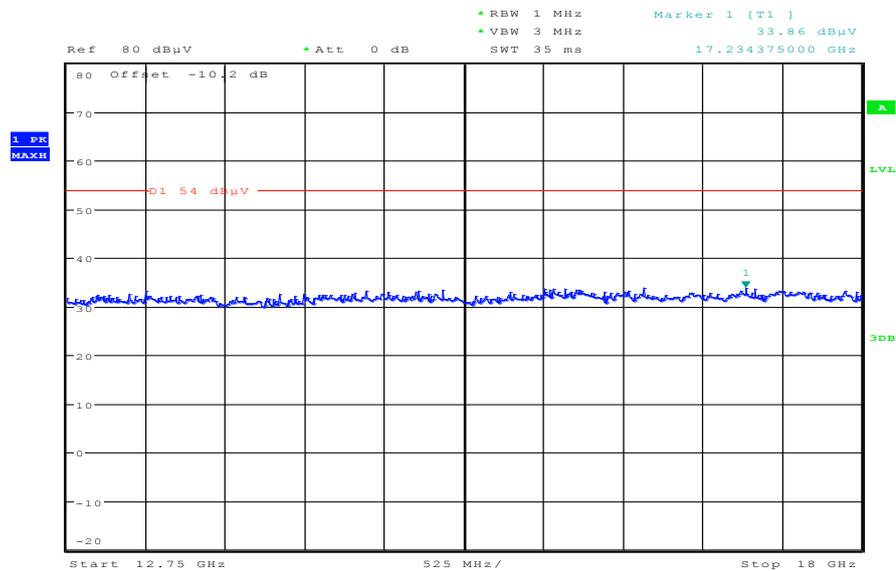


Date: 7.MAR.2013 08:36:45

Plot 4: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

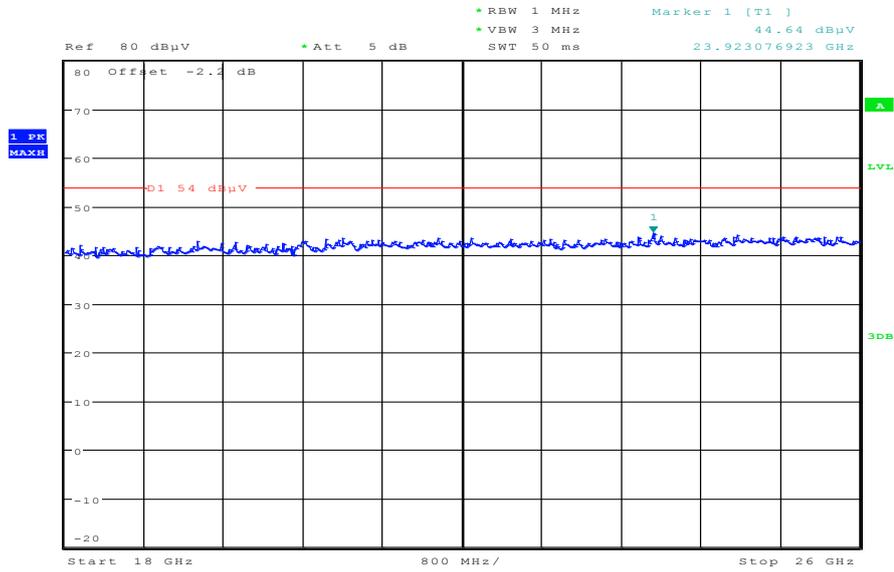

Date: 7.MAR.2013 08:43:40

Plot 5: Lowest channel, 26 GHz to 40 GHz, vertical & horizontal polarization

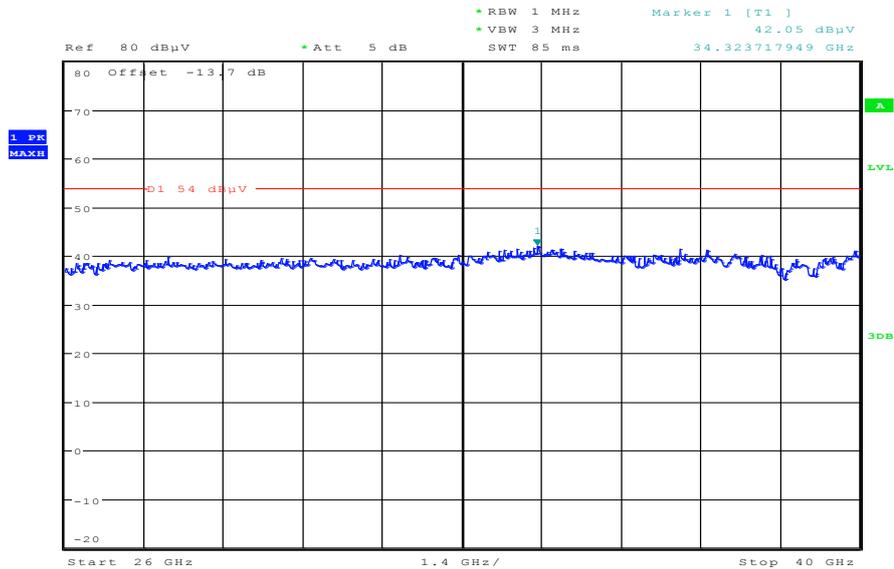

Date: 7.MAR.2013 09:54:00

Plot 6: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0320--BV
 Serial Number: CB5A1NUBMJ
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: WLAN HT40 CH159 TX + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

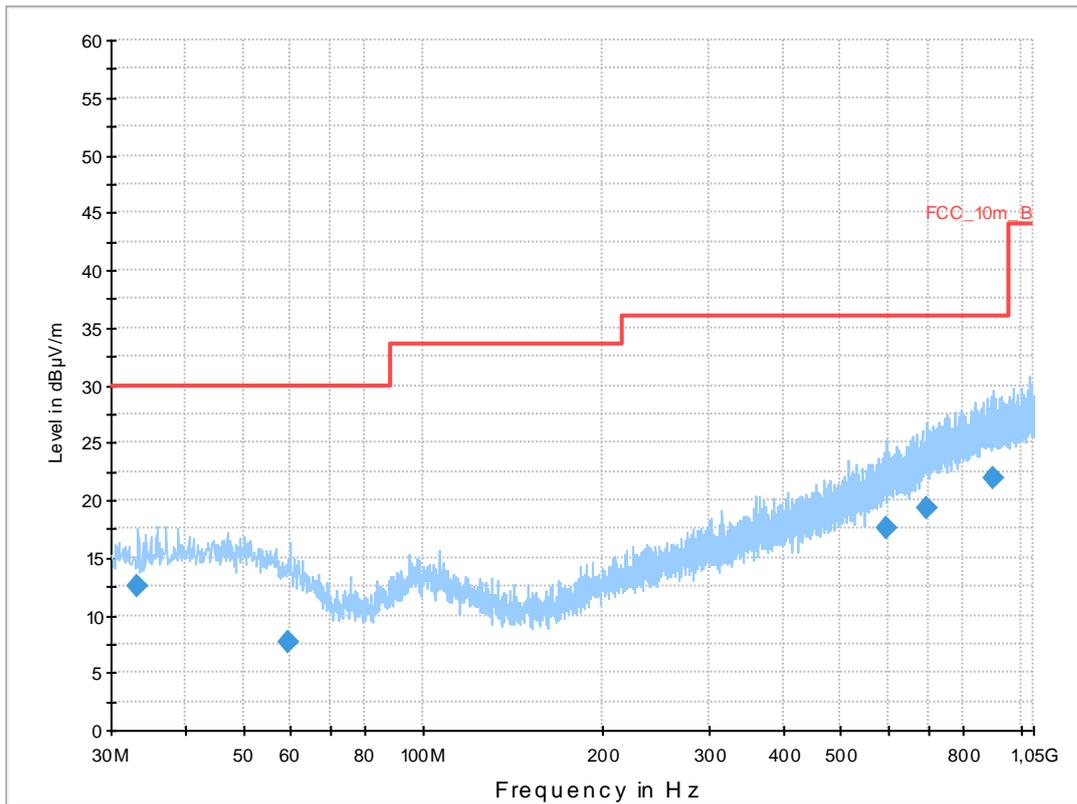


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
33.292650	12.4	1000.0	120.000	98.0	V	10.0	12.9	17.6	30.0	
59.573700	7.6	1000.0	120.000	98.0	H	182.0	11.7	22.4	30.0	
594.900000	17.6	1000.0	120.000	170.0	H	100.0	20.7	18.4	36.0	
697.517100	19.3	1000.0	120.000	170.0	H	100.0	22.4	16.7	36.0	
899.373300	21.9	1000.0	120.000	170.0	H	280.0	25.2	14.1	36.0	

Plot 7: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

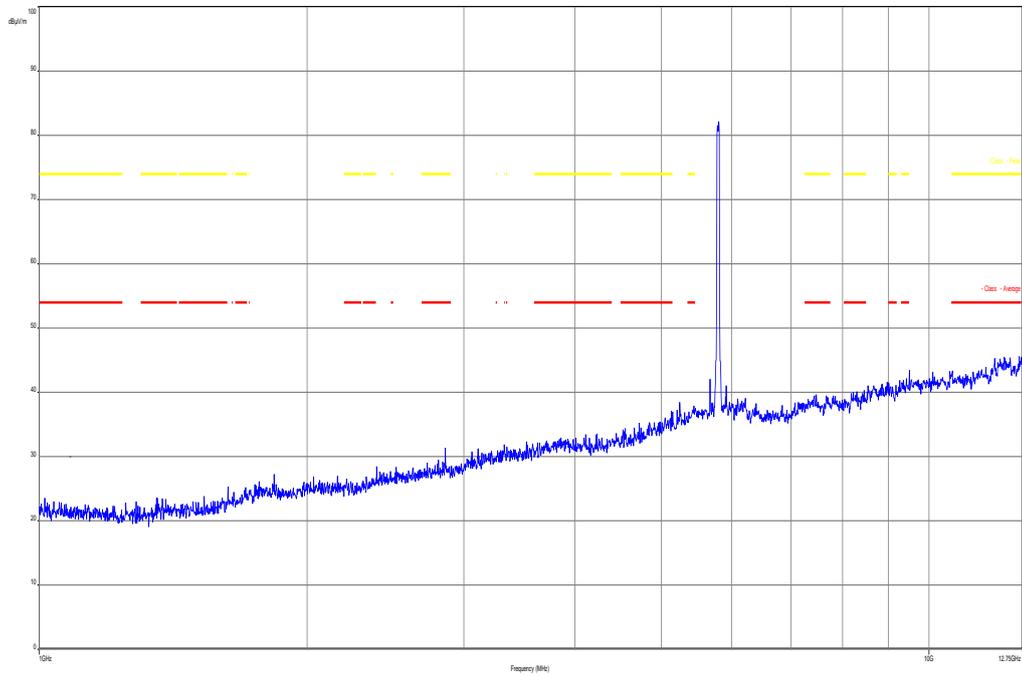


Plot 8: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

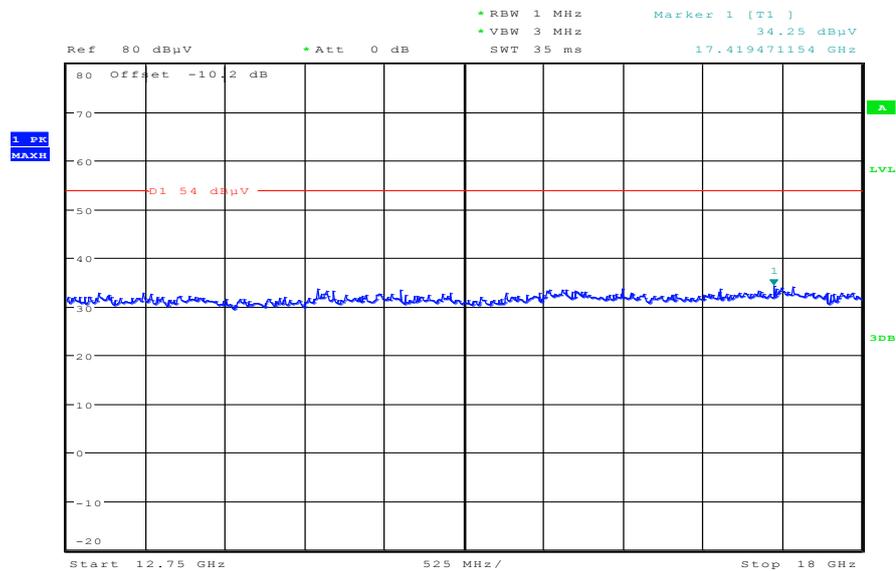


Date: 7.MAR.2013 08:37:44

Plot 9: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

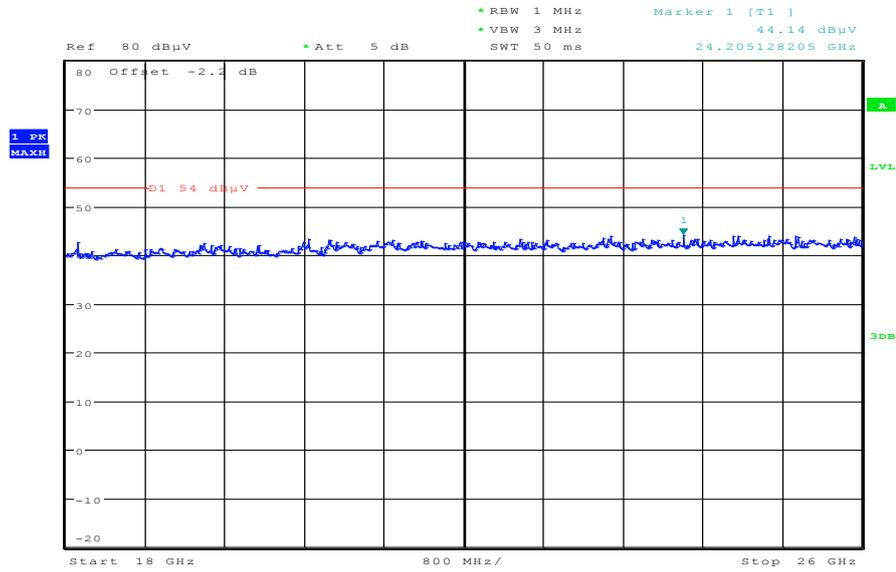

Date: 7.MAR.2013 08:44:07

Plot 10: Highest channel, 26 GHz to 40 GHz, vertical & horizontal polarization

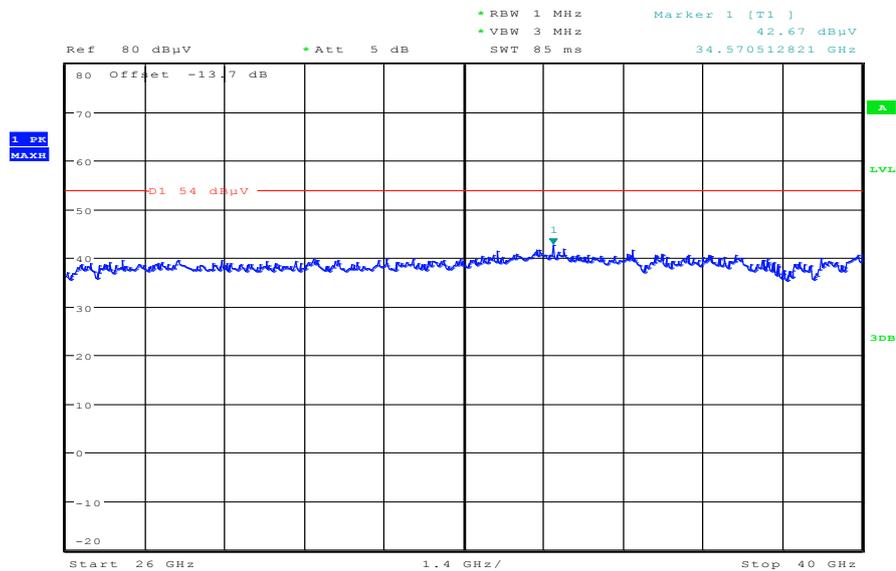

Date: 7.MAR.2013 09:54:50

9.11 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode. The results are valid for both modes.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak / RMS
Sweep time:	Auto
Resolution bandwidth:	F > 1 GHz: 1 MHz F < 1 GHz: 100 kHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz / 3 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC		
RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results:

RX Spurious Emissions Radiated [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
Measurement uncertainty	± 3 dB	

Result: Passed.

Plots: RX / Idle – mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: PM-0320--BV
 Serial Number: CB5A1NUBMJ
 Test Description: FCC part 15 class B @ 10m
 Operating Conditions: W-LAN idle + charging
 Operator Name: Medrow
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m


Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

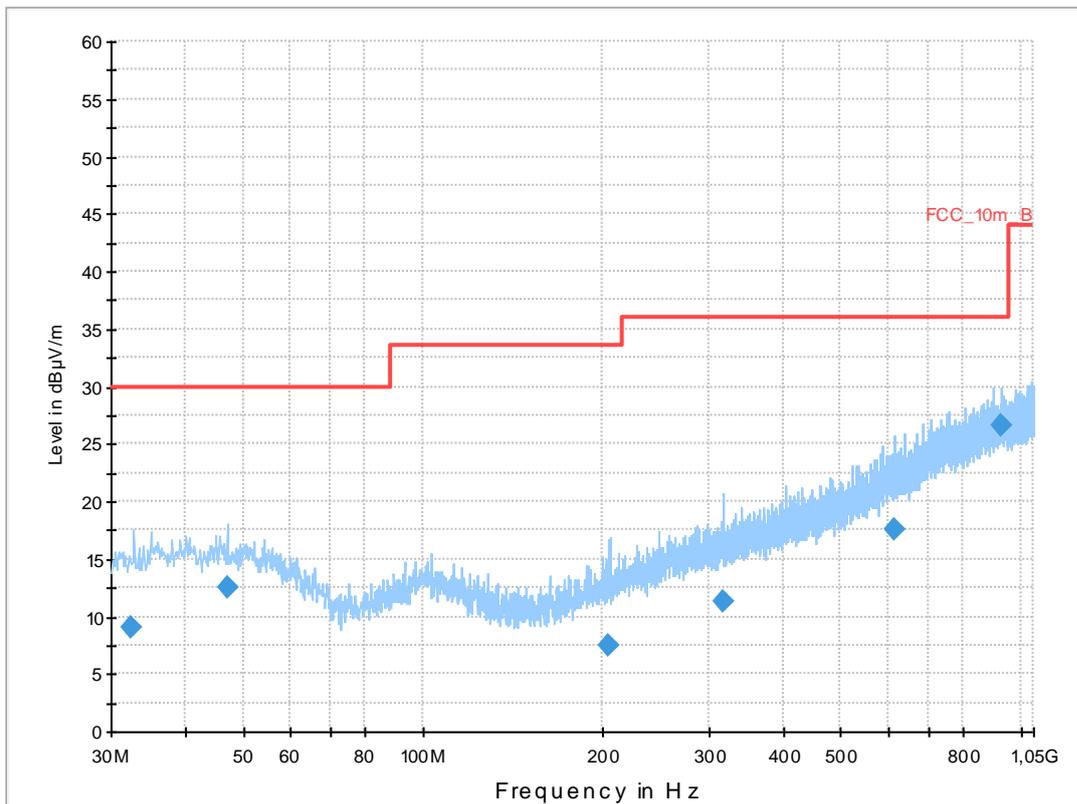


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
32.355000	9.1	1000.0	120.000	133.0	H	190.0	12.8	20.9	30.0	
46.981800	12.5	1000.0	120.000	133.0	V	10.0	13.3	17.5	30.0	
204.253350	7.4	1000.0	120.000	170.0	H	100.0	11.9	26.1	33.5	
318.557250	11.3	1000.0	120.000	106.0	H	100.0	15.1	24.7	36.0	
613.815150	17.6	1000.0	120.000	170.0	V	-10.0	20.9	18.4	36.0	
927.407250	26.7	1000.0	120.000	170.0	V	280.0	25.3	9.3	36.0	

Plot 2: 1 GHz to 12.75 GHz, vertical & horizontal polarization

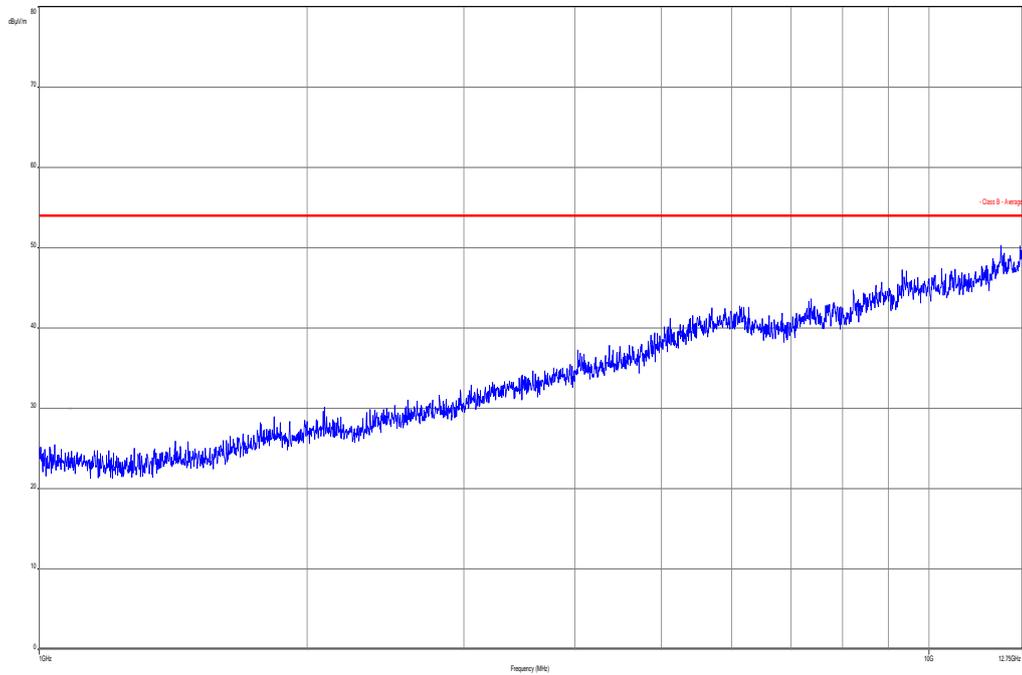


Plot 3: 12.75 GHz to 18 GHz, vertical & horizontal polarization

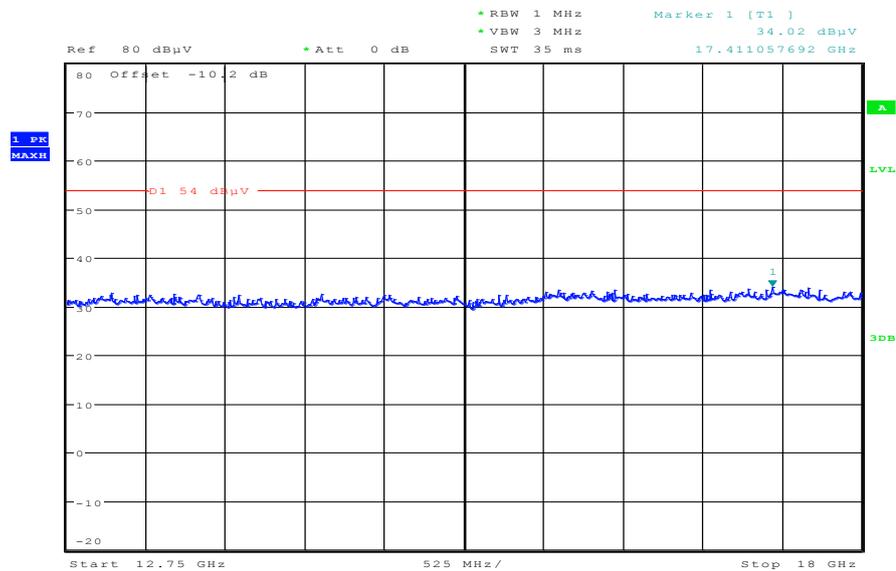


Date: 7.MAR.2013 08:38:49

Plot 4: 18 GHz to 26 GHz, vertical & horizontal polarization

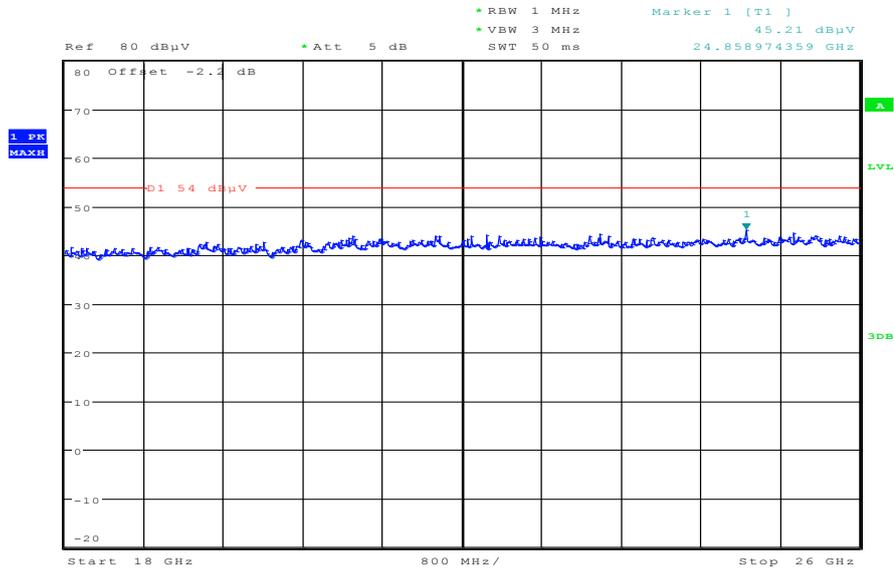

Date: 7.MAR.2013 08:40:05

Plot 5: 26 GHz to 40 GHz, vertical & horizontal polarization

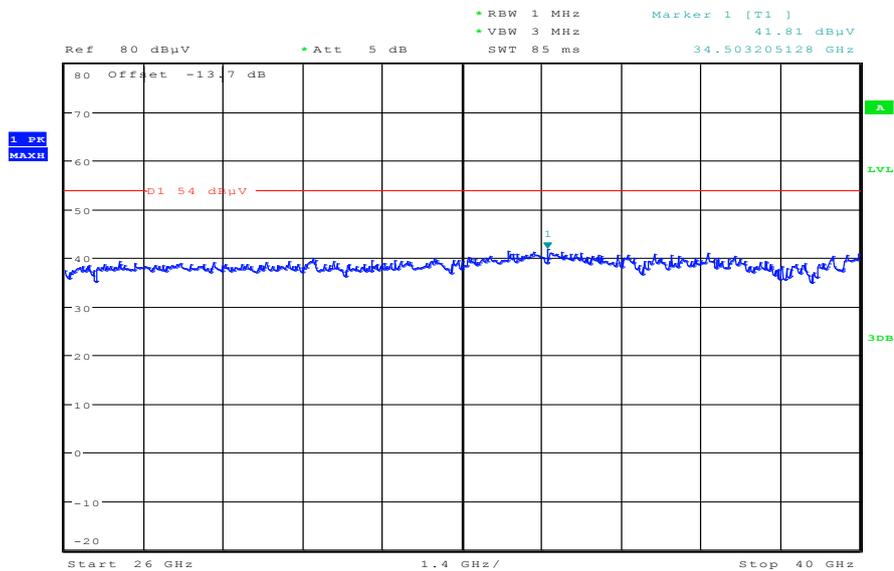

Date: 7.MAR.2013 09:44:12

9.12 Spurious emissions radiated < 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to mid channel. This measurement is representative for all channels and modes. If critical peaks are found the lowest channel and the highest channel will be measured too. The measurement is performed with the data rate producing the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		
TX Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30


Results:

TX Spurious Emissions Radiated < 30 MHz [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
No peaks found.		
Measurement uncertainty	± 3 dB	

Result: Passed


Plots: TX mode

Plot 1: 9 kHz to 30 MHz

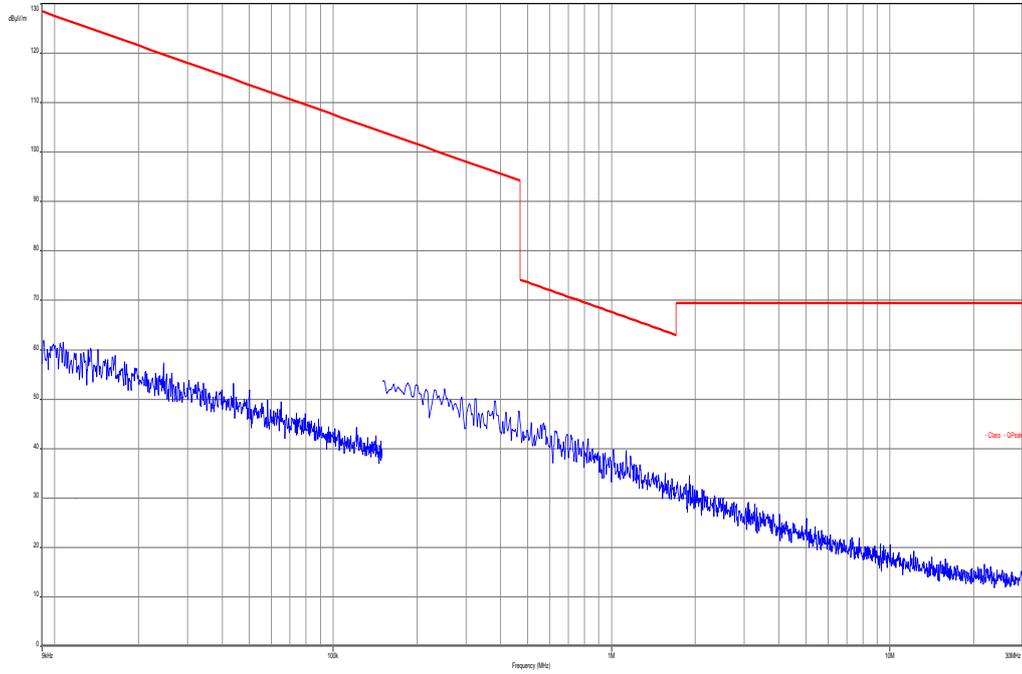

Plots: RX / Idle – mode

Plot 1: 9 kHz to 30 MHz

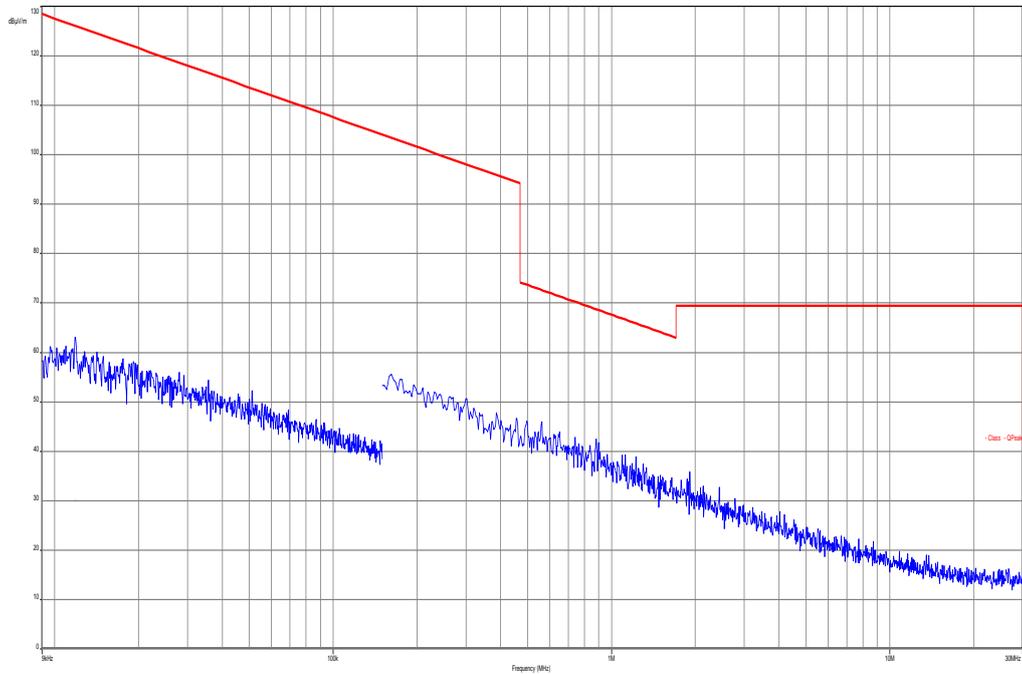

9.13 Spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to mid channel. If critical peaks are found the lowest channel and the highest channel will be measured too. The measurement is performed with the data rate producing the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		
TX Spurious Emissions Conducted < 30 MHz		
Frequency (MHz)	Quasi-Peak (dBµV/m)	Average (dBµV/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

*Decreases with the logarithm of the frequency


Results:

TX Spurious Emissions Conducted < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
No critical peaks detected. All detected peak values are below the average limits.		
Measurement uncertainty	± 3 dB	


Result: Passed

Plots:


Plot 1: TX mode, 150 kHz to 30 MHz, phase line

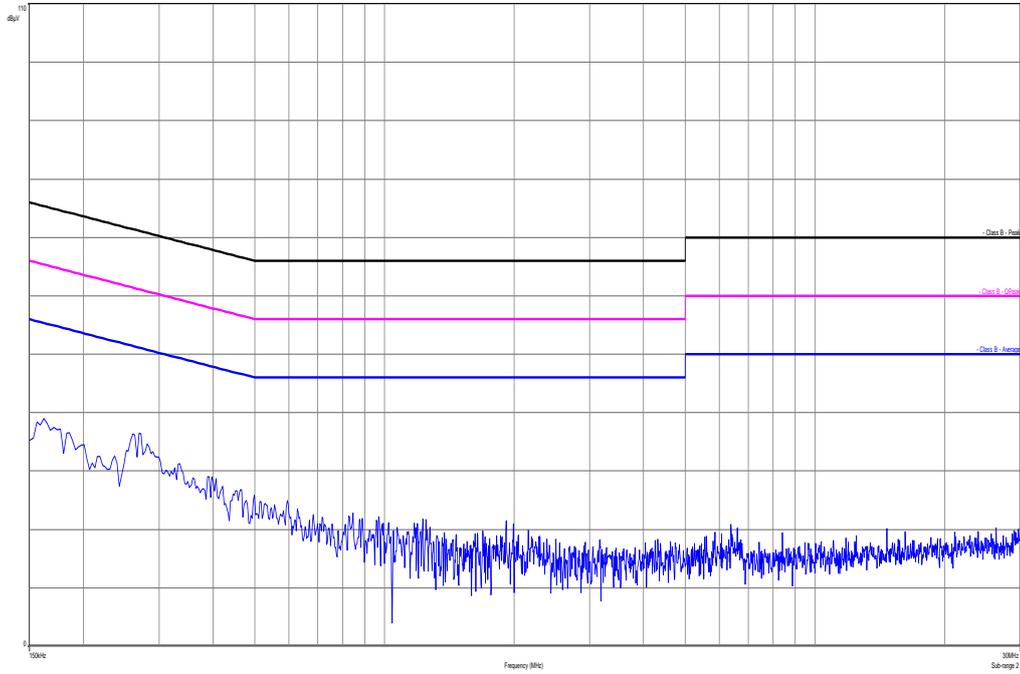


Plot 2: TX mode, 150 kHz to 30 MHz, neutral line

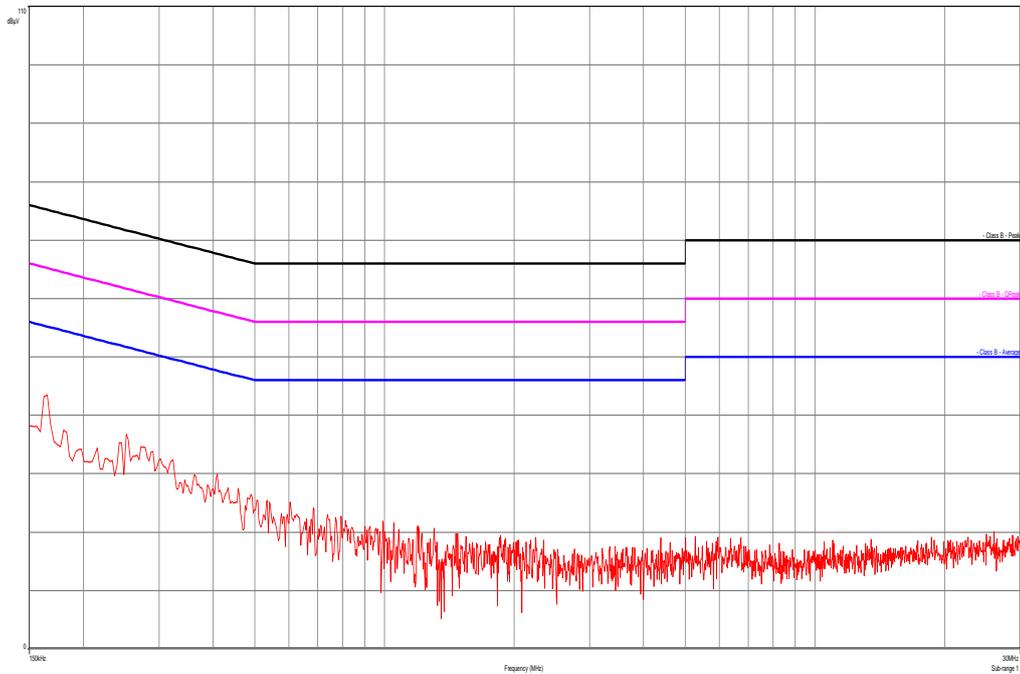

Plot 3: RX / Idle – mode, 150 kHz to 30 MHz, phase line

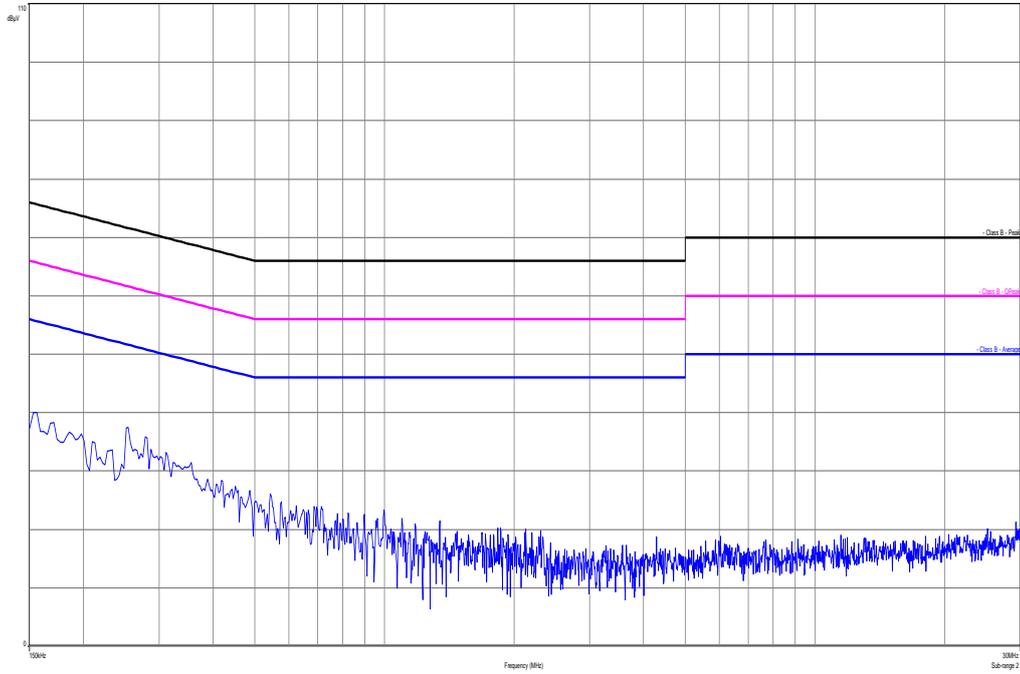

Plot 4: RX / Idle – mode, 150 kHz to 30 MHz, neutral line

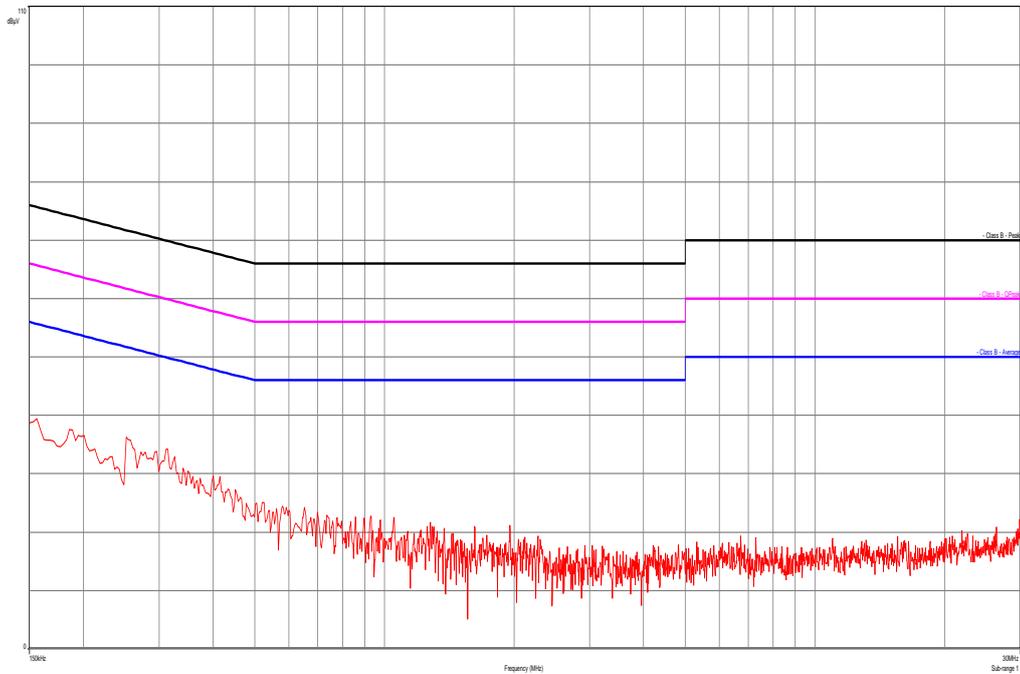

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!	11.05.2011	11.05.2013
2	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
3	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
4	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	*	300000199	ne		
5	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156	ne		
6	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
7	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
8	n. a.	Highpass Filter	WHKX7.0/1 8G-8SS	Wainwright	18	300003789	ne		
9	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vIKI!	14.10.2011	14.10.2014
10	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	19.12.2011	
11	n. a.	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004xxx	k	22.10.2012	22.10.2013
12	CR 79	Std. Gain Horn Antenna 26.5-40.0 GHz	V637	Narda	7911	300001751	ne		
13	11b	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268	ev		
14	A025	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000786	ne		
15	A028	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda		300002440	ne		
16	n. a.	Broadband Low Noise Amplifier 18-50 GHz	CBL18503 070-XX	CERNEX	19338	300004273	ne		
17	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
18	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
19	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081; B5979	300000210	ne		
20	n. a.	EMI Test Receiver	ESCI 1166.5950.03	R&S	100083	300003312	k	09.01.2013	09.01.2014
21	n. a.	Analyser-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	k	14.07.2011	14.07.2013

22	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
23	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
24	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
25	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
26	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	12.04.2012	12.04.2014
27	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	16.01.2013	16.01.2015

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

11 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A Document history

Version	Applied changes	Date of release
1.0	Initial release	2013-03-07

Annex B Further information**Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex C Accreditation Certificate



Deutsche Akkreditierungsstelle GmbH
 Beliehene gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV
 Unterzeichnerin der Multilateralen Abkommen
 von EA, ILAC und IAF zur gegenseitigen Anerkennung

Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium
CETECOM ICT Services GmbH
 Untertürkheimer Straße 6-10, 66117 Saarbrücken
 die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen
 durchzuführen:

- Drahtgebundene Kommunikation einschließlich xDSL
- VoIP und DECT
- Akustik
- Funk einschließlich WLAN
- Short Range Devices (SRD)
- RFID
- WiMax und Richtfunk
- Mobilfunk (GSM / DCS, Over the Air (OTA) Performance)
- Elektromagnetische Verträglichkeit (EMV) einschließlich Automotive
- Produktsicherheit
- SAR und Hearing Aid Compatibility (HAC)
- Umweltsimulation
- Smart Card Terminals
- Bluetooth
- Wi-Fi Services

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 18.01.2013 mit der
 Akkreditierungsnummer D-PL-12076-01 und ist gültig 17.01.2018. Sie besteht aus diesem Deckblatt, der
 Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 80 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-01

Frankfurt am Main, 18.01.2013
 Seite 1/1 (siehe auch Rückseite)

Im Auftrag
 Dr. Ingrid (FH) von Eger
 Akkreditierungsstelle

Deutsche Akkreditierungsstelle GmbH

Standort Berlin Spittelmarkt 10 10117 Berlin	Standort Frankfurt am Main Gartenstraße 6 60594 Frankfurt am Main	Standort Braunschweig Bundesallee 100 38116 Braunschweig
--	---	--

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen
 Zustimmung der Deutschen Akkreditierungsstelle GmbH (DAKKS). Ausgenommen davon ist die separate
 Weiterverbreitung des Deckblattes durch die umseitig genannte Konformitätsbewertungsstelle in
 unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt,
 die über den durch die DAKKS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom
 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments
 und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung
 im Zusammenhang mit der Vermarktung von Produkten (Abi. L 218 vom 9. Juli 2008, S. 30).
 Die DAKKS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der
 European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und
 der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen
 erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:
 EA: www.european-accreditation.org
 ILAC: www.ilac.org
 IAF: www.iaf.nu

Note:

The current certificate including annex is published on our website (see link below) or may be received
 from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>