



FCC PART 15C TEST REPORT No. 2013TAR293

for

Sony Mobile Communications AB

GSM 850/900/1800/1900 quad bands and CDMA2000 850/1900

dual bands mobile phone

Type: PM-0370-BV

FCC ID: PY7PM-0370

with

Hardware Version: A

Software Version: 12.0.B.1.36

Issued Date: May. 6th, 2013



DAR accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629B

Note:The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of the Ministry of Industry and Information Technology

Shouxiang Science Building, No 51, Xueyuan Road, Haidian District, Beijing, P.R.China 100191

Tel:+86(0)10-62304633, Fax:+86(0)10-62304633 Email:welcomes@emcite.com. www.emcite.com

CONTENTS

CONTENTS	2
1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT.....	4
1.3. PROJECT DATA	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	6
3.4. NORMAL ACCESSORY SETTING.....	7
3.5. GENERAL DESCRIPTION.....	7
4. REFERENCE DOCUMENTS.....	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS	10
6.1. SUMMARY OF TEST RESULTS.....	10
6.2. STATEMENTS.....	10
6.3. TEST CONDITIONS	10
7. TEST EQUIPMENTS UTILIZED	12
ANNEX A: MEASUREMENT RESULTS.....	13
A.1. MEASUREMENT METHOD	13
A.2. PEAK OUTPUT POWER	14
A.2.1 Antenna gain	14
A.2.2 Conducted Output Power	14
A.2.3 Radiated Output Power	14
A.3. FREQUENCY BAND EDGES	16
A.4. CONDUCTED EMISSION.....	18
A.5. RADIATED EMISSION.....	27
A.6. 6dB BANDWIDTH.....	35
A.7. MAXIMUM POWER SPECTRAL DENSITY LEVEL	37
A. 8. AC POWERLINE CONDUCTED EMISSION	39
A.9 .RECEIVER RADIATION EMISSION	42

ANNEX B: PHOTOGRAPHS OF THE TEST SET-UP..... 44
ANNEX C: PHOTOGRAPHS OF THE EUT 45

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: Shouxiang Science Building, No 51, Xueyuan Road, Haidian District,
Beijing, P.R.China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304633

1.2. Testing Environment

Normal Temperature: 15-35°C
Extreme Temperature: -20/+55°C
Relative Humidity: 30-60%
Air Pressure 990hPa-1040hPa

Note:The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

1.3. Project data

Project Leader: Zi Xiaogang
Testing Start Date: 2013-04-02
Testing End Date: 2013-05-06

1.4. Signature

Zi Xiaogang
(Prepared this test report)

Sun Xiangqian
(Reviewed this test report)

Song Chongwen
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Sony Mobile Communications (China) Co. Ltd
Address /Post: Sony Mobile R&D Center, No. 16, Guangshun South Street,
Chaoyang District
City: Beijing
Postal Code: 100102
Country: China
Contact: Ma, Gang
Telephone: +86-10-58656312
Fax: +86-10-58659049

2.2. Manufacturer Information

Company Name: Sony Mobile Communications AB
Address /Post: Nya Vattentornet, 22188 Lund, Sweden
City: Lund
Postal Code: 22188
Country: Sweden
Contact: Nordlof, Anders
Telephone: +46-10-802 3919
Fax: +46-10-800 2441

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM 850/900/1800/1900, GPRS, EDGE, CDMA2000 Band Class0/1 Bluetooth EDR & BLE, WLAN (802.11 b/g/n), FM, NFC, GPS receiver mobile phone
Type	PM-0370-BV
FCC ID	PY7PM-0370
Frequency Range	ISM 2400MHz~2483.5MHz
Type of Modulation	GFSK
Number of Channels	40
Cellular Frequency Band	GSM 850/900/1800/1900, GPRS, EDGE, CDMA2000 Band Class0/1
Antenna	Integrated Antenna
MAX Radiated Power	4.25dBm
MAX Conducted Power	2.59dBm
Power Supply	3.7V DC by Battery

Note: Photographs of EUT are shown in ANNEX D of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	S/N	IMEI	HW Version	SW Version
#23869	CB5123NF8C	004402146474683	A	12.0.B.1.36
#23871	CB5123BF84	004402146474642	A	12.0.B.1.36

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Revision
AE1	Portable Hands-Free	12311A17001FAE	1
#23496	Travel Charger	8512W124400471	1C
#23813	USB Cable	123107D5000A46E	1

AE1

Type	CCA-0004017
Manufacturer	Sony Mobile
Length of cable	150cm

#23496

Commercial name	EP880
Type	AC-0400-US
Manufacturer	Salcomp

#23813

Commercial name	EC801
Type	AI-0401
Manufacturer	Sony Mobile
Length of cable	96.5cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery was used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of GSM 850/900/1800/1900 quad bands and CDMA2000 850/1900 dual bands mobile phone with integrated antenna and inbuilt battery.

The EUT supports two SIM card slots.

GSM SIM card slot supports GSM 900/1800/1900MHz bands. It also supports GPRS service with multi-slots class 8 and EGPRS service with multi-slots class 8 too.

CTC SIM card slot supports GSM 850/900/1800/1900MHz bands and CDMA2000 bands 0/1. It also supports GPRS service with multi-slots class 12 and EGPRS service with multi-slots class 12 too.

It has MP3, camera, FM radio, USB memory, GPS receiver, NFC, Mobile High-Definition Link (MHL), Bluetooth (EDR and Bluetooth 4.0), WLAN (802.11 b/g/n) and Wi-Fi hotspot functions.

It includes normal option: travel charger, Portable Hands-Free and USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

	FCC CFR 47, Part 15, Subpart C:	
	15.205 Restricted bands of operation;	10-1-12
FCC Part15	15.209 Radiated emission limits, general requirements;	Edition
	15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	
ANSI C63.10	Procedures for testing compliance of a wide variety of unlicensed wireless devices	2009
KDB 558074	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247	V01
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

Control room/ conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber2 (8.6 meters×6.1 meters×3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Fully-anechoic chamber3 (10 meters×6.7 meters×6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz

Additional Humidity Requirements for Electrostatic Discharge Test: Min. = 30%, Max. = 60%.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

Abbreviations used in this clause:

- P** Pass, The EUT complies with the essential requirements in the standard.
- F** Fail, The EUT does not comply with the essential requirements in the standard
- NA** Not Applicable, The test was not applicable
- NP** Not Performed, The test was not performed by TMC

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power - Conducted	15.247 (b)(1)	P
Frequency Band Edges	15.247 (d)	P
Conducted Emission	15.247 (d)	P
Radiated Emission	15.247, 15.205, 15.209	P
6dB Bandwidth	15.247 (a)(2)	P
Maximum Power Spectral Density Level	15.247(e)	P
AC Powerline Conducted Emission	15.107, 15.207	P
Receiver Radiation Emission	15.109	P

Please refer to **ANNEX A** for detail.

The measurement is made according to KDB 558074 and ANSI C63.10.

6.2. Statements

TMC has evaluated the test cases requested by the applicant /manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

6.3. Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage
V min	Low Voltage
V max	High Voltage
H nom	Norm Humidity
A nom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	T nom	25°C
Voltage	V nom	3.7V(By battery)
Humidity	H nom	39%

Air Pressure	A nom	1015hPa
--------------	-------	---------

7. Test Equipments Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Vector Signal Analyzer	FSU26	200030	Rohde & Schwarz	2013-12-18
2	Bluetooth Tester	CBT32	100649	Rohde & Schwarz	2014-02-03

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	2013-11-07
2	EMI Antenna	VULB 9163	514	Schwarzbeck	2014-11-10
3	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	2014-06-30
5	Dual-Ridge Waveguide Horn Antenna	3116	2661	ETS-Lindgren	2014-06-30
6	Universal Radio Communication Tester	CMU200	109914	Rohde & Schwarz	2014-04-18
7	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	2014-04-15
8	Pre-amplifier(18GHz)	/	1005277	Rohde & Schwarz	/
9	Pre-amplifier(26.5GHz)	/	1005277	Rohde & Schwarz	/

Anechoic chamber

Fully anechoic chamber by Frankonia German.


ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

The measurement is made according to Public notice KDB 558074 and ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer

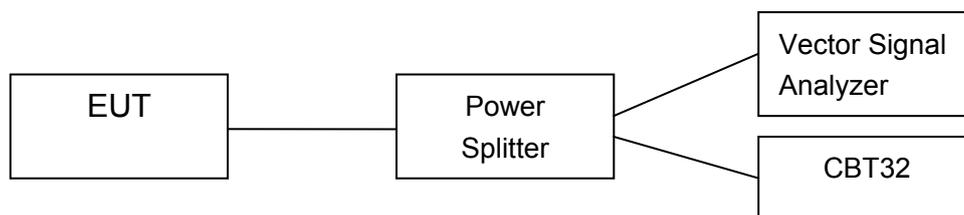

A.1.2. Radiated Emission Measurements


The measurement is made according to Public notice KDB 558074 and ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

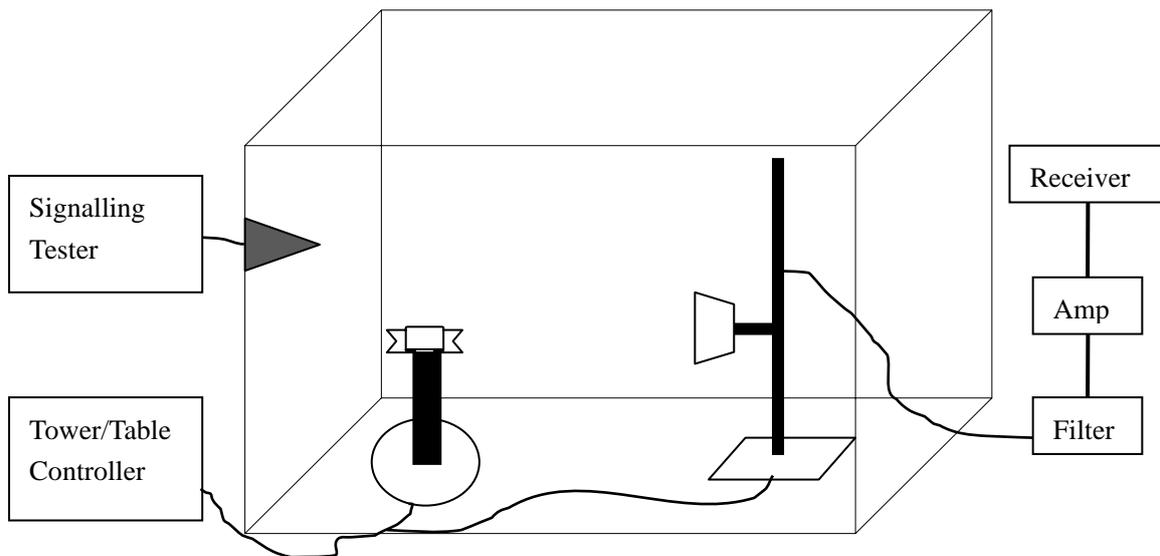

A.2. Peak Output Power

Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1)/ RSS-210 A8.4 (2)	< 30

The measurement is made according to KDB 558074 and ANSI C63.10.

Measurement Results:

A.2.1 Antenna gain

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the EUT.

Frequency	2402 MHz	2440 MHz	2480 MHz
GFSK (Conducted)	2.21	2.59	1.88
GFSK (Radiated)	4.25	4.05	4.22
Gain(dBi)	2.04	1.46	2.34

Conclusion: PASS

A.2.2 Conducted Output Power

Peak(RBW=1MHz;VBW=5MHz;SPAN=0;Detector:Peak)

Frequency	2402 MHz	2440 MHz	2480 MHz	Conclusion
GFSK (dBm)	2.21	2.59	1.88	P

Average(RBW=1MHz;VBW=5MHz;SPAN=0;Detector:RMS)

Frequency	2402 MHz	2440 MHz	2480 MHz	Conclusion
GFSK (dBm)	2.00	2.37	1.62	P

Measurement Uncertainty: ±1.17dB

Conclusion: PASS

A.2.3 Radiated Output Power

Peak(RBW=1MHz;VBW=5MHz;SPAN=0;Detector:Peak)

Frequency	2402 MHz	2440 MHz	2480 MHz	Conclusion
GFSK (dBm)	4.25	4.05	4.22	P

Average

Frequency	2402 MHz	2440 MHz	2480 MHz	Conclusion
GFSK * (dBm)	4.04	3.83	3.96	P

Note:* These values are calculated with the antenna gain

Measurement Uncertainty: $\pm 1.98\text{dB}$

Conclusion: PASS

A.3. Frequency Band Edges

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d) RSS-210 A8.5	<-20 Note: The measurement results are calculated as power measured in any 100KHz bandwidth outside the frequency band in dBm minus power measured in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

The measurement is made according to KDB 558074 and ANSI C63.10.

Measurement Condition:

RBW=VBW=100KHz; SPAN=8MHz; Detector: peak

Measurement Result:


For GFSK

Frequency	Hopping	Band Edge Power (dBc)		Conclusion
2402MHz	Hopping OFF	Fig.1	-56.58	P
2480MHz	Hopping OFF	Fig.2	-61.82	P

Measurement Uncertainty: $\pm 1.37\text{dB}$


Conclusion: **PASS**

Test graphs as below

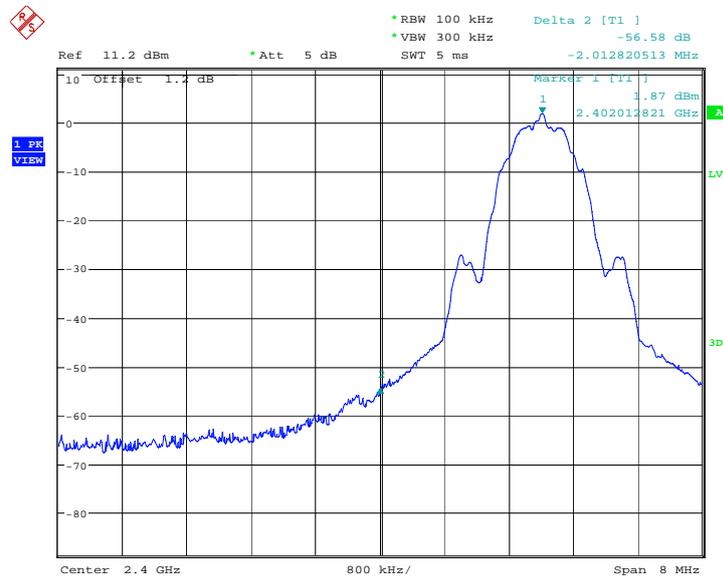

Date: 6.MAY.2013 05:40:19

Fig.1. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off

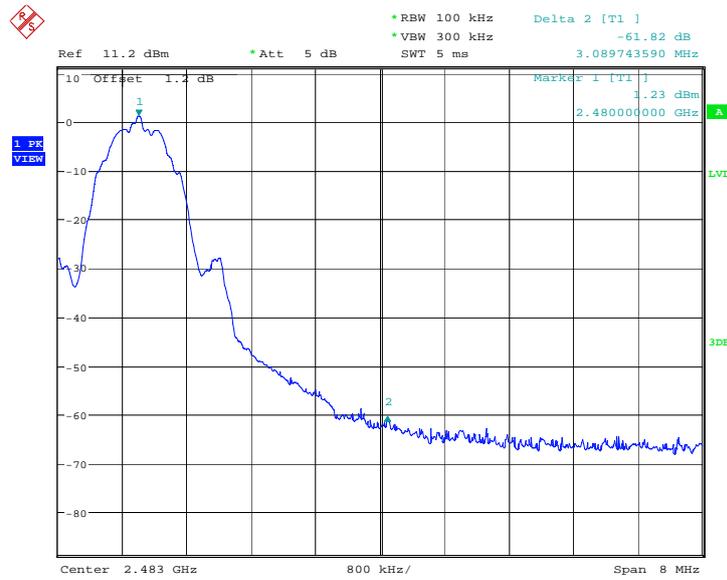

Date: 6.MAY.2013 05:46:15

Fig.2. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off

A.4. Conducted Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d) RSS-210 A8.5	20dB below peak output power in 100 kHz bandwidth

The measurement is made according to KDB 558074 and ANSI C63.10


Measurement Results:

For GFSK

Frequency	Frequency Range	Test Results	Conclusion
2402 MHz	Center Frequency	Fig.3	P
	30 MHz ~ 1 GHz	Fig.4	P
	1 GHz ~ 3 GHz	Fig.5	P
	3 GHz ~ 10 GHz	Fig.6	P
	10 GHz ~ 26 GHz	Fig.7	P
2440 MHz	Center Frequency	Fig.8	P
	30 MHz ~ 1 GHz	Fig.9	P
	1 GHz ~ 3 GHz	Fig.10	P
	3 GHz ~ 10 GHz	Fig.11	P
	10 GHz ~ 26 GHz	Fig.12	P
2480 MHz	Center Frequency	Fig.13	P
	30 MHz ~ 1 GHz	Fig.14	P
	1 GHz ~ 3GHz	Fig.15	P
	3 GHz ~ 10 GHz	Fig.16	P
	10 GHz ~ 26 GHz	Fig.17	P


Conclusion: PASS

Test graphs as below

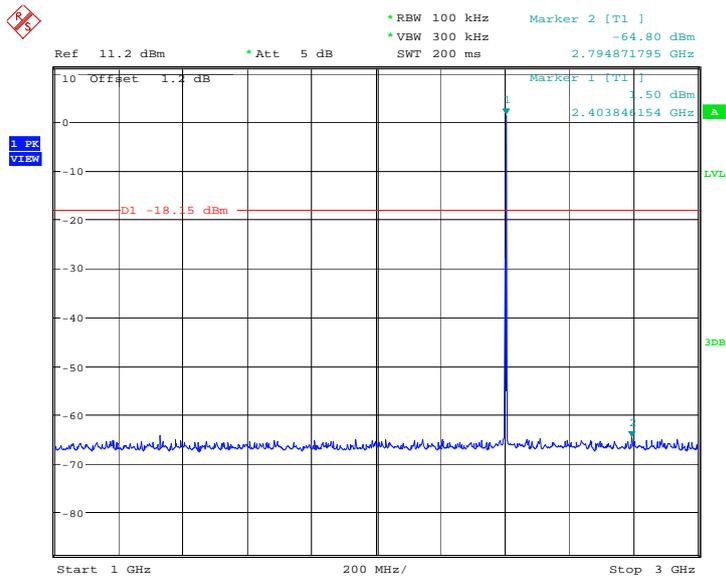


Date: 8.APR.2013 02:40:45

Fig.5. Conducted spurious emission: GFSK, 2402 MHz,1GHz - 3GHz

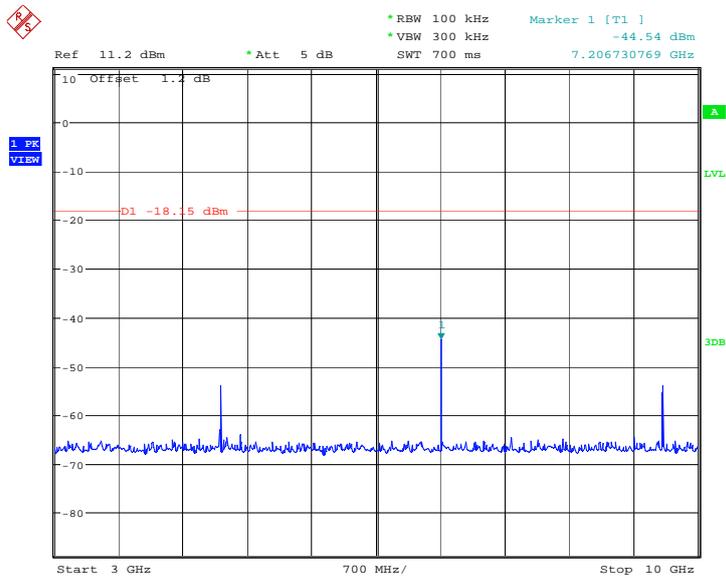


Date: 8.APR.2013 02:41:01

Fig.6. Conducted spurious emission: GFSK, 2402 MHz,3GHz - 10GHz

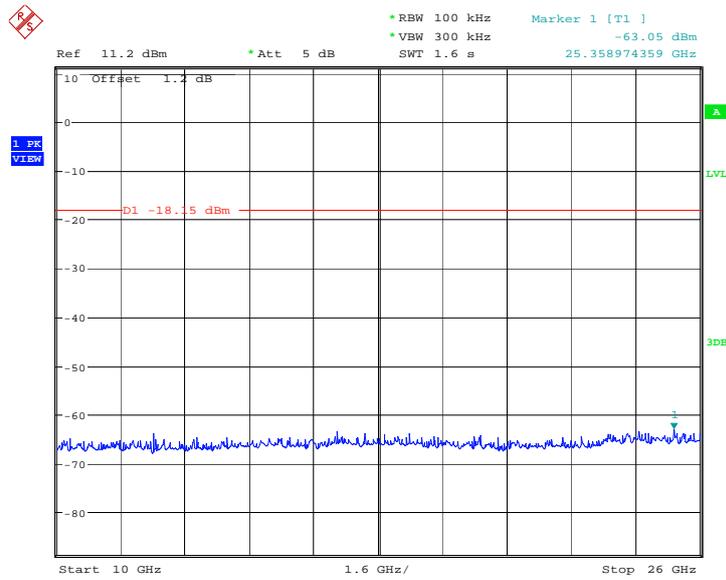


Date: 8.APR.2013 02:41:18

Fig.7. Conducted spurious emission: GFSK, 2402 MHz, 10GHz - 26GHz

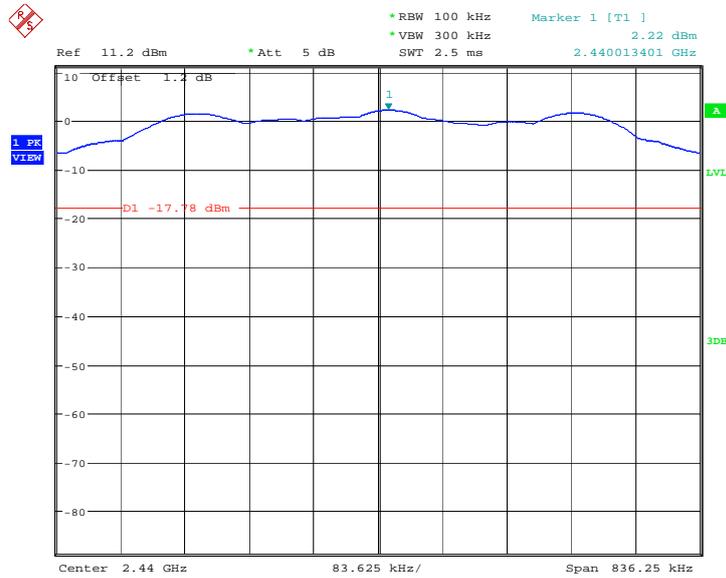


Date: 8.APR.2013 02:50:53

Fig.8. Conducted spurious emission: GFSK, 2440MHz

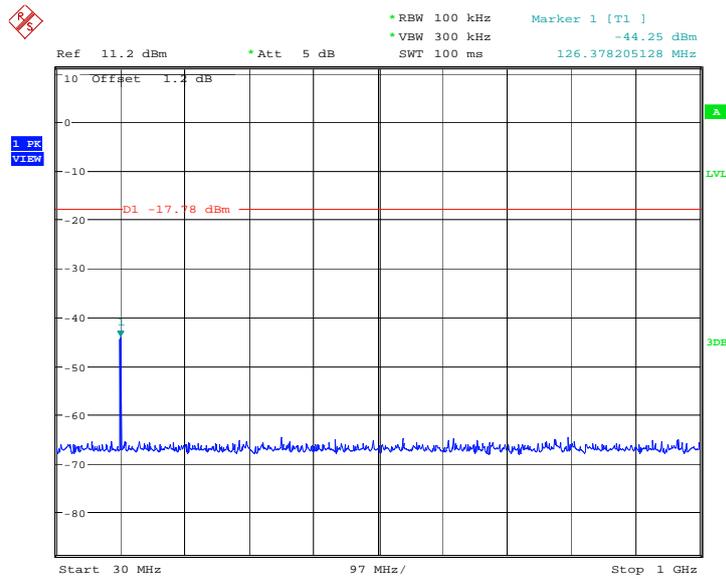


Date: 8.APR.2013 02:51:10

Fig.9. Conducted spurious emission: GFSK, 2440 MHz, 30MHz - 1GHz

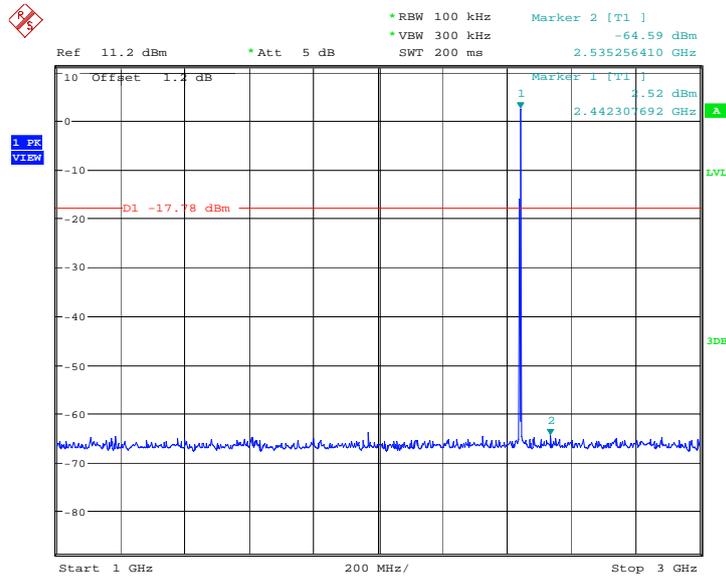


Date: 8.APR.2013 02:51:41

Fig.10. Conducted spurious emission: GFSK, 2440 MHz, 1GHz – 3GHz

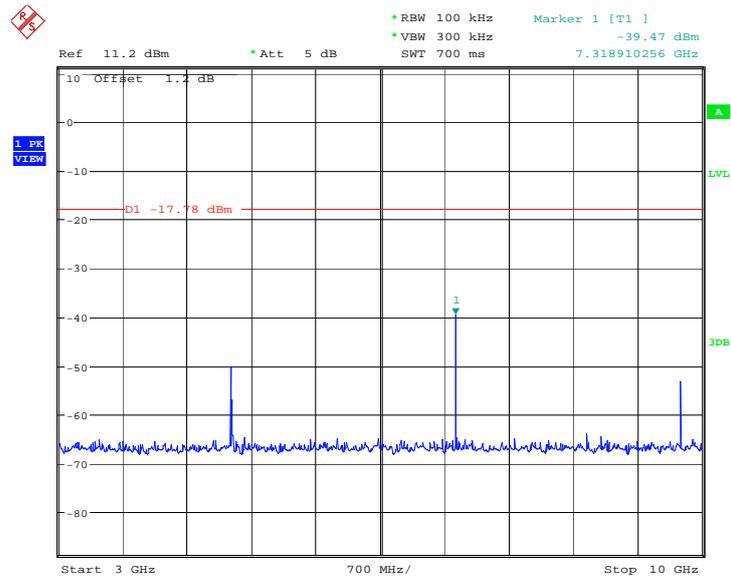


Date: 8.APR.2013 02:51:58

Fig.11. Conducted spurious emission: GFSK, 2440 MHz, 3GHz – 10GHz

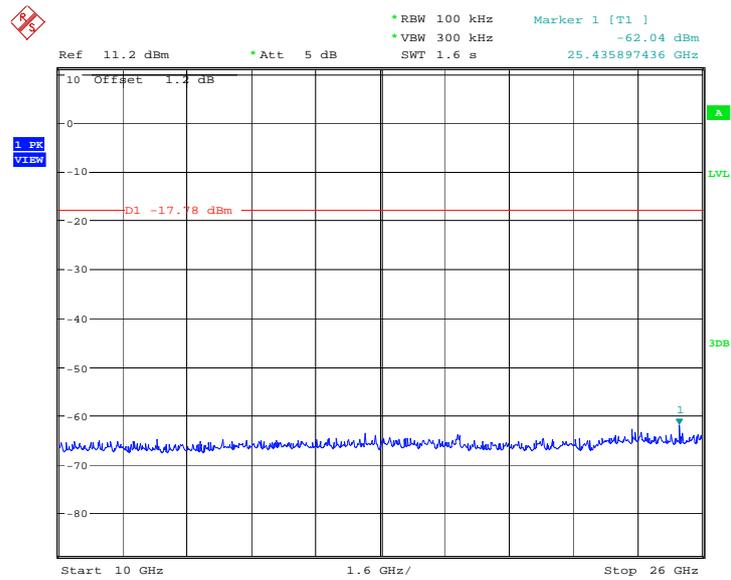


Date: 8.APR.2013 02:52:15

Fig.12. Conducted spurious emission: GFSK, 2440 MHz, 10GHz – 26GHz

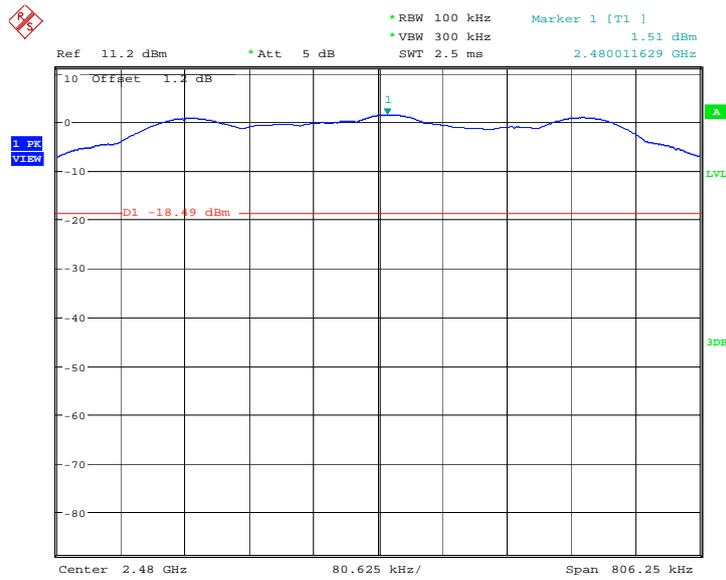


Date: 8.APR.2013 02:24:20

Fig.13. Conducted spurious emission: GFSK, 2480 MHz

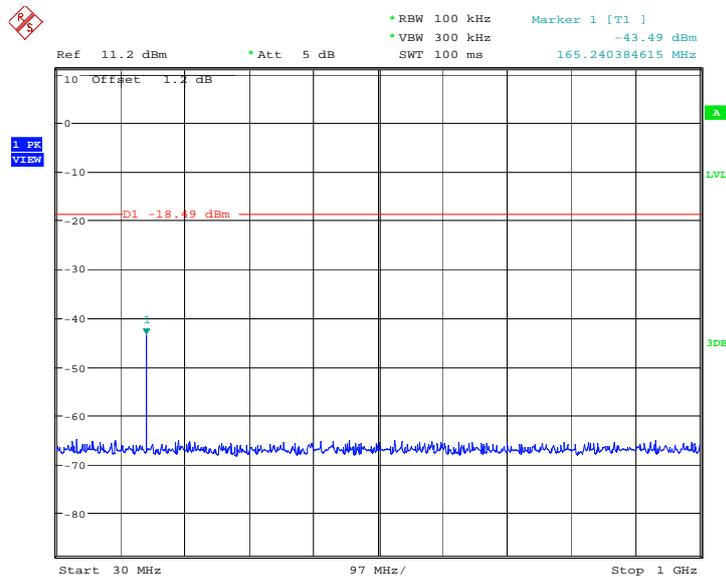


Date: 8.APR.2013 02:24:37

Fig.14. Conducted spurious emission: GFSK, 2480 MHz, 30MHz - 1GHz

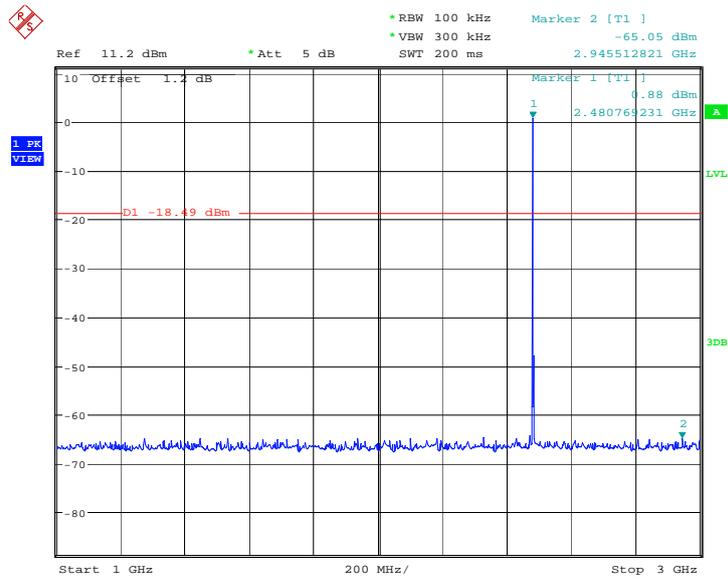

Date: 8.APR.2013 02:25:08

Fig.15. Conducted spurious emission: GFSK, 2480 MHz, 1GHz - 3GHz

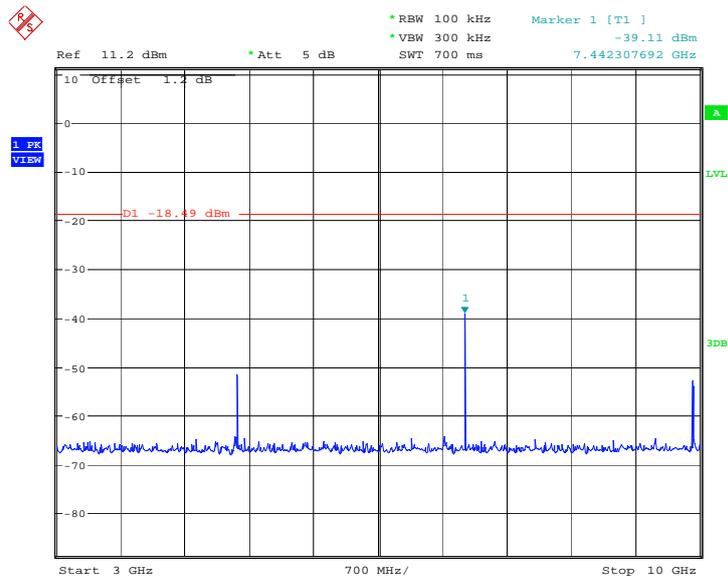

Date: 8.APR.2013 02:25:25

Fig.16. Conducted spurious emission: GFSK, 2480 MHz, 3GHz - 10GHz

A.5. Radiated Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209 RSS-210 A8.5	Listed as follows

Frequency (MHz) Field strength	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to Public notice KDB 558074 and ANSI C63.10.

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
0.009-30	100KHz/300KHz	5
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Measurement Results:

A “reference path loss” is established and the A_{Rp1} is the attenuation of “reference path loss”, and

including the gain of receive antenna, the gain of the preamplifier, the cable los.
The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}}$$

For GFSK

Frequency	Frequency Range	Test Results	Conclusion
2402MHz	30 MHz ~ 1 GHz	Fig.18	P
	1 GHz ~ 3 GHz	Fig.19	P
	3 GHz ~ 18 GHz	Fig.20	P
2440 MHz	30 MHz ~ 1 GHz	Fig.21	P
	1 GHz ~ 3 GHz	Fig.22	P
	3 GHz ~ 18 GHz	Fig.23	P
2480 MHz	30 MHz ~ 1 GHz	Fig.24	P
	1 GHz ~ 3 GHz	Fig.25	P
	3 GHz ~ 18 GHz	Fig.26	P
Power	2.38GHz~2.4GHz---L	Fig.27	P
Power	2.45GHz~2.5GHz---H	Fig.28	P
For all channels	18 GHz ~ 26 GHz	Fig.29	P

Note: Only worst case result is given.

Conclusion: PASS

Test graphs as below:

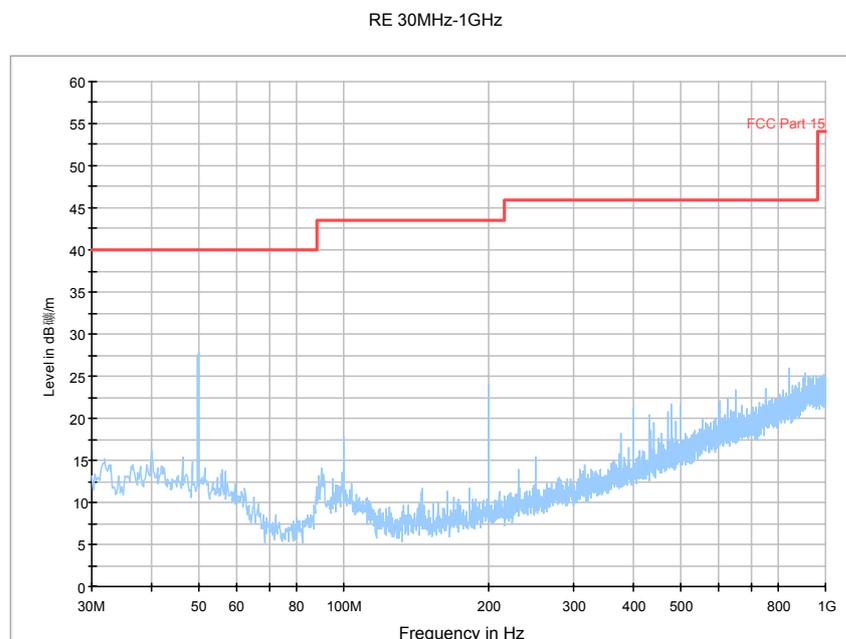


Fig.18. Radiated emission: GFSK, 2402MHz, 30 MHz - 1 GHz

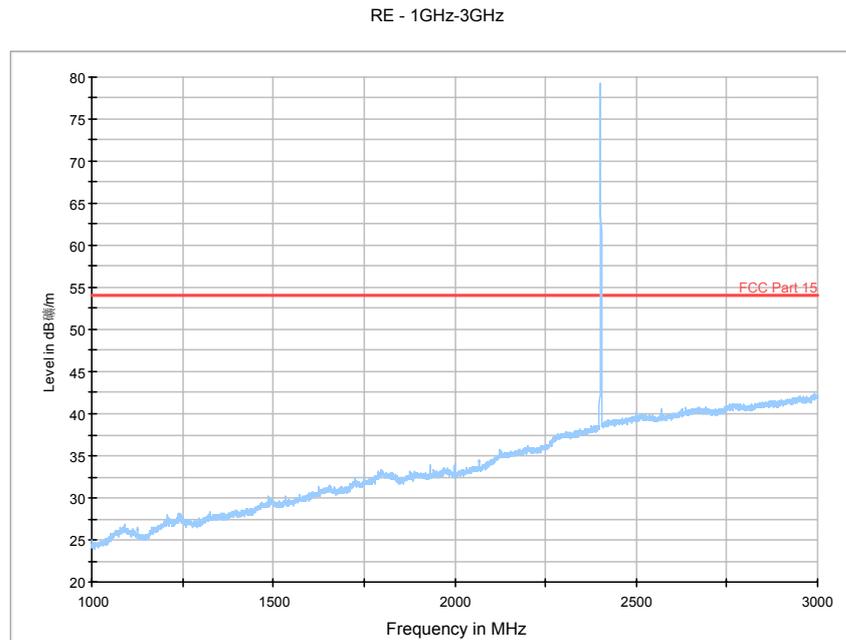


Fig.19. Radiated emission: GFSK, 2402MHz, 1 GHz - 3 GHz

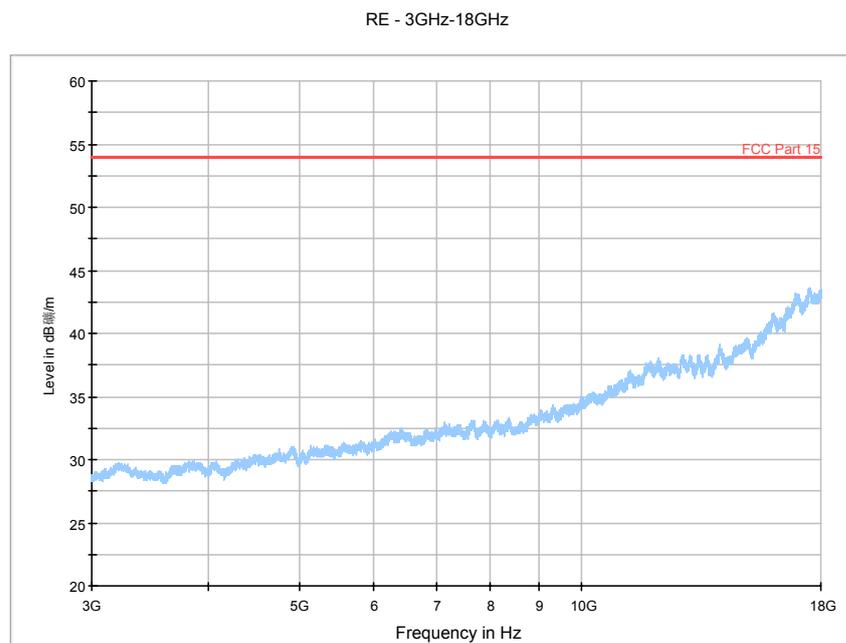


Fig.20. Radiated emission: GFSK, 2402MHz, 3 GHz - 18 GHz

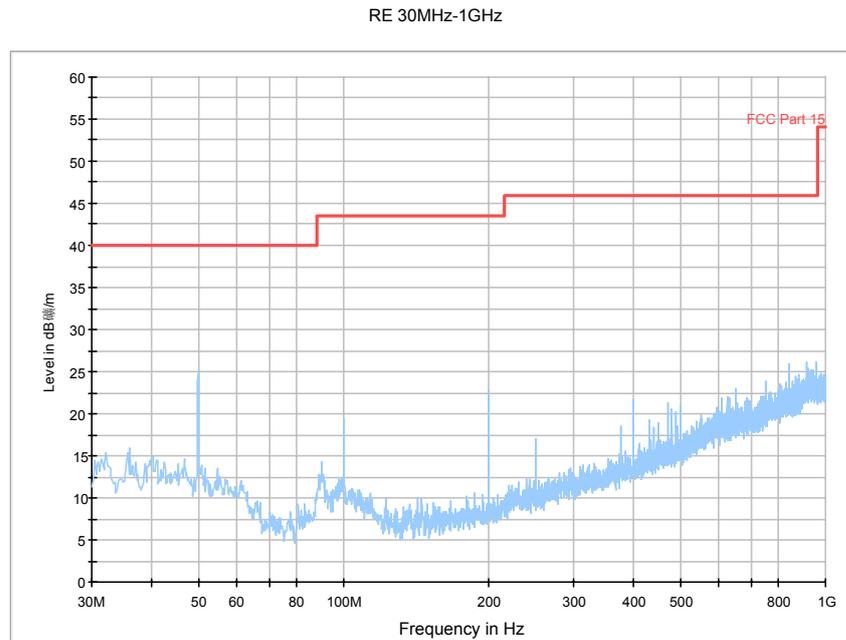


Fig.21. Radiated emission: GFSK, 2440MHz, 30 MHz - 1 GHz

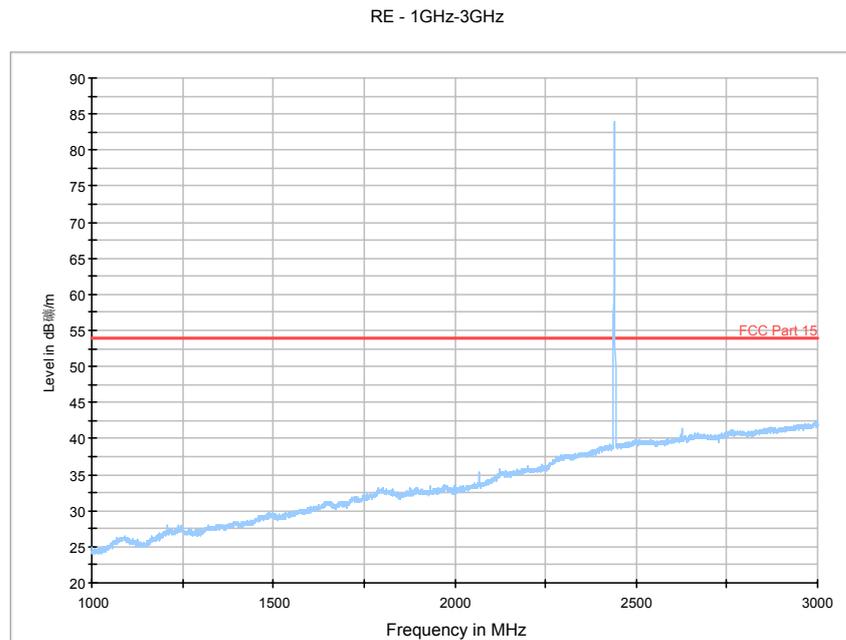


Fig.22. Radiated emission: GFSK, 2440MHz, 1 GHz - 3 GHz

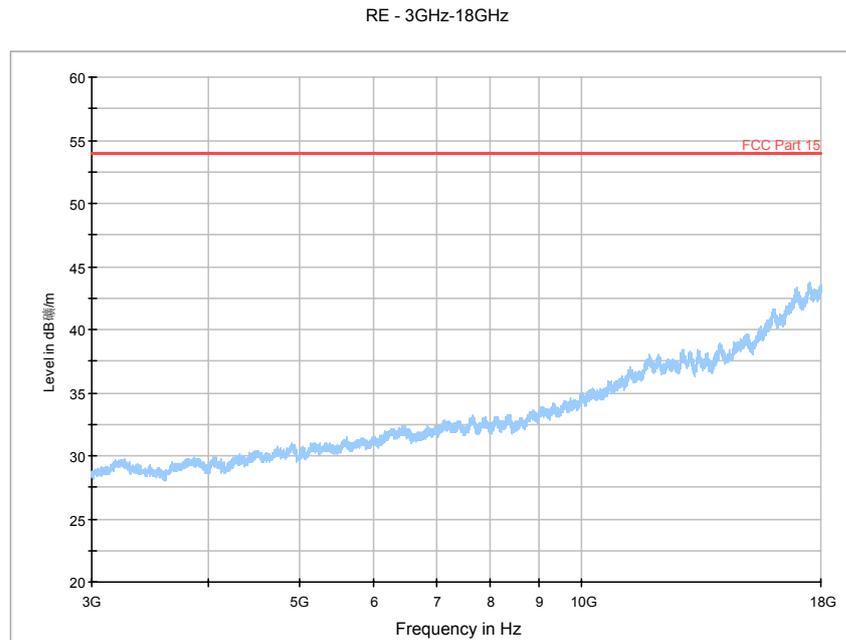


Fig.23. Radiated emission: GFSK, 2440MHz, 3 GHz - 18 GHz

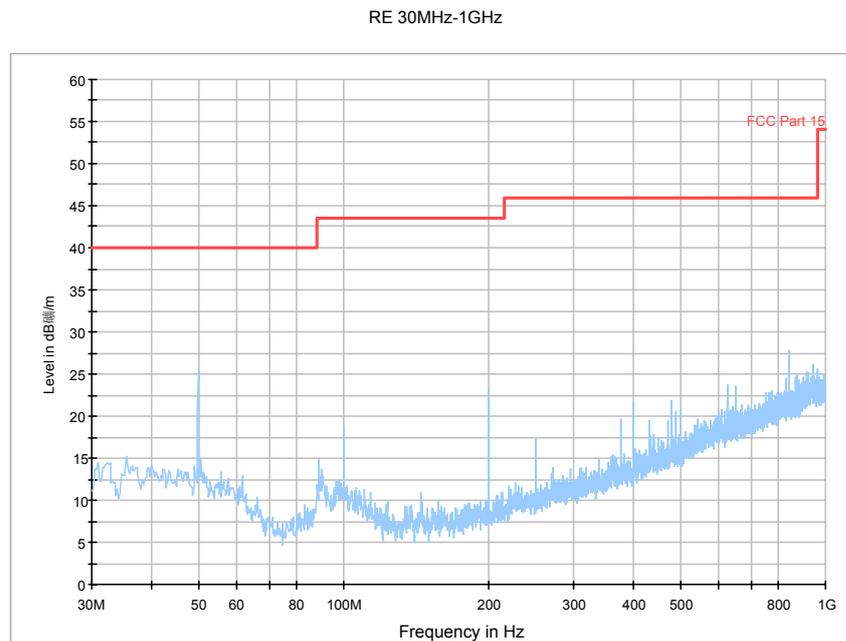


Fig.24. Radiated emission: GFSK, 2480MHz, 30 MHz - 1 GHz

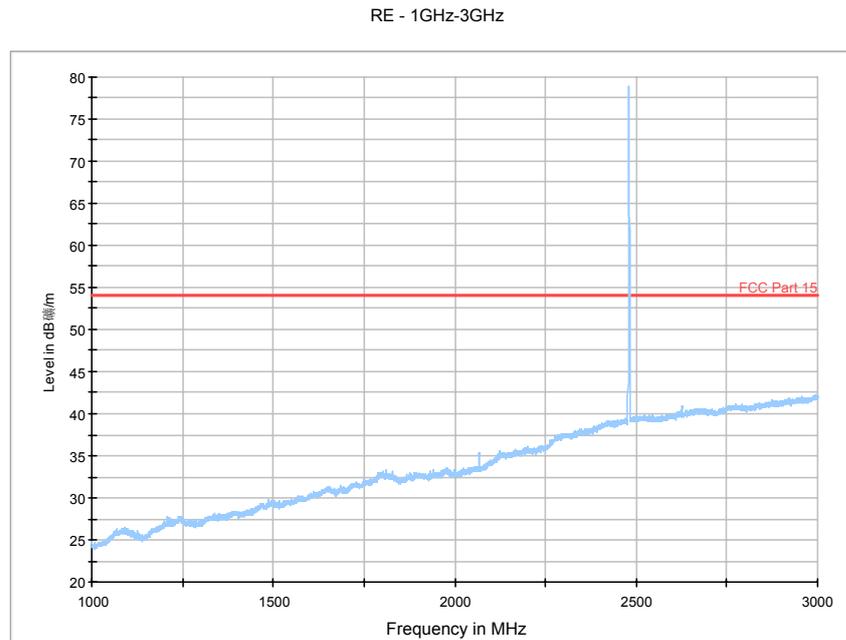


Fig.25. Fig.47 Radiated emission: GFSK, 2480MHz, 1 GHz - 3 GHz

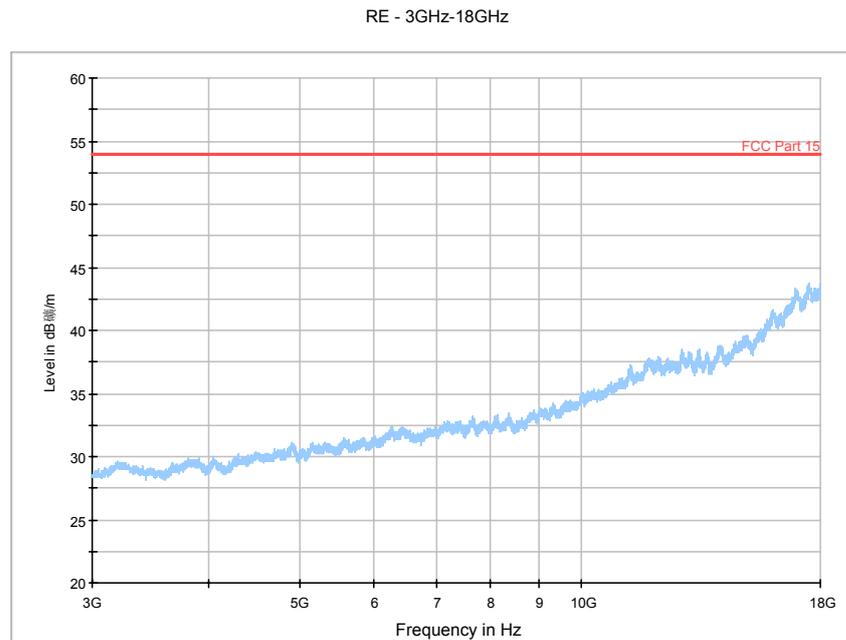


Fig.26. Radiated emission: GFSK, 2480MHz, 3 GHz - 18 GHz

RE - Power-2.38GHz-2.45GHz

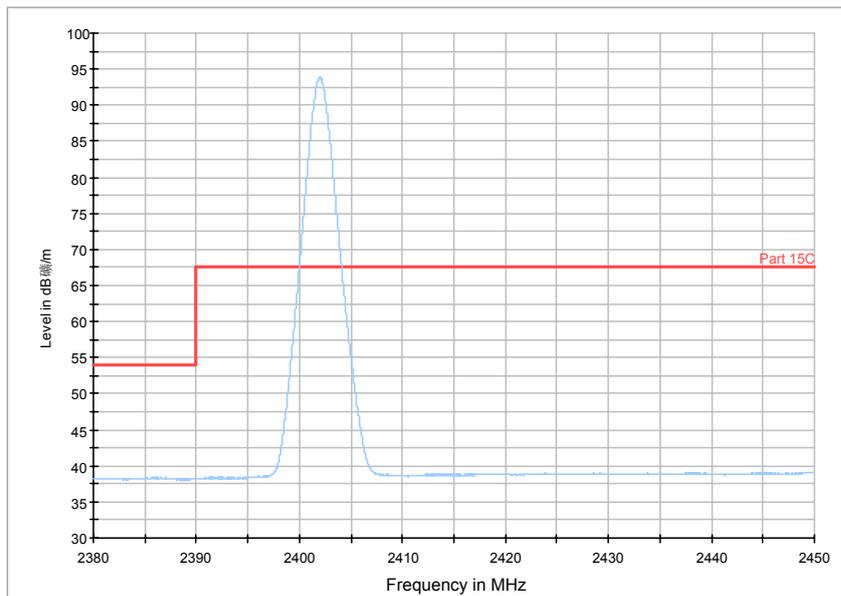


Fig.27. Radiated emission (Power): GFSK, low channel

RE - Power-2.45GHz-2.5GHz

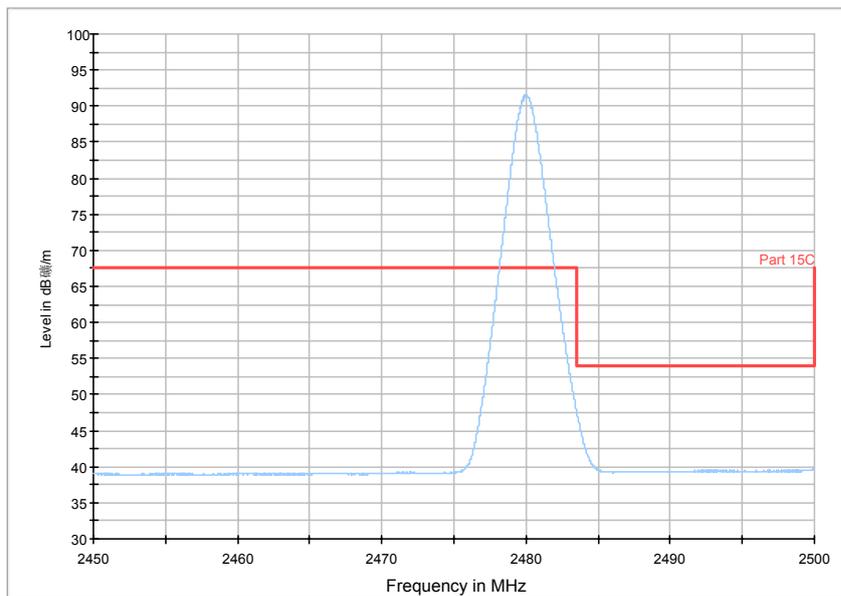


Fig.28. Radiated emission (Power) GFSK, high channel

EMI 18GHz-26.5GHz

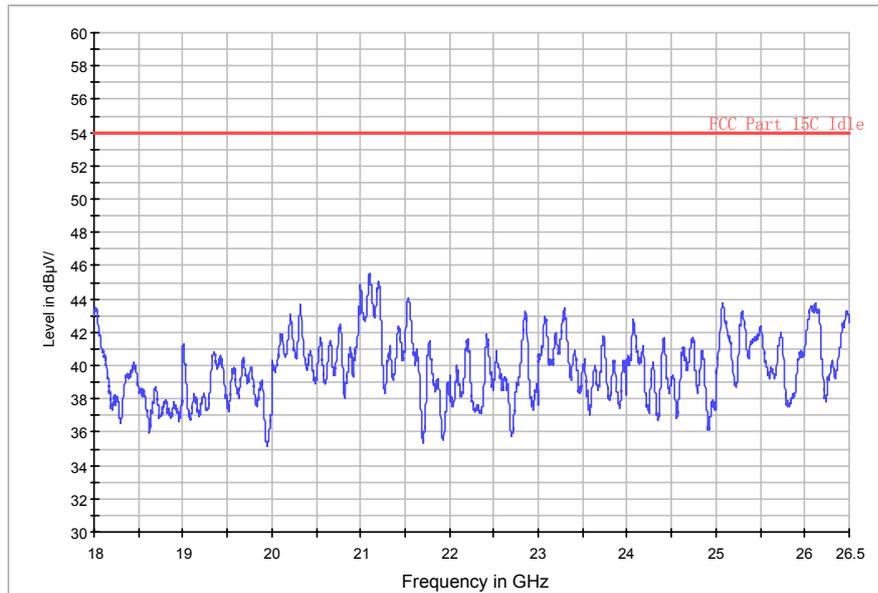


Fig.29. Radiated emission: GFSK, 18 GHz - 26 GHz

A.6. 6dB Bandwidth

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(2) RSS-210 A8.1	>= 500KHz

The measurement is made according to KDB 558074 and ANSI C63.10

Measurement Condition:

RBW=10KHz; VBW=30KHz; SPAN=2MHz; Detector: peak

Measurement Results:


For GFSK

Channel	6dB Bandwidth (kHz)		Conclusion
2402MHz	Fig.30.	714.74	P
2440MHz	Fig.31.	714.74	P
2480MHz	Fig.32.	689.10	P

Measurement Uncertainty:±1.1KHz


Conclusion:PASS

Test graphs as below:

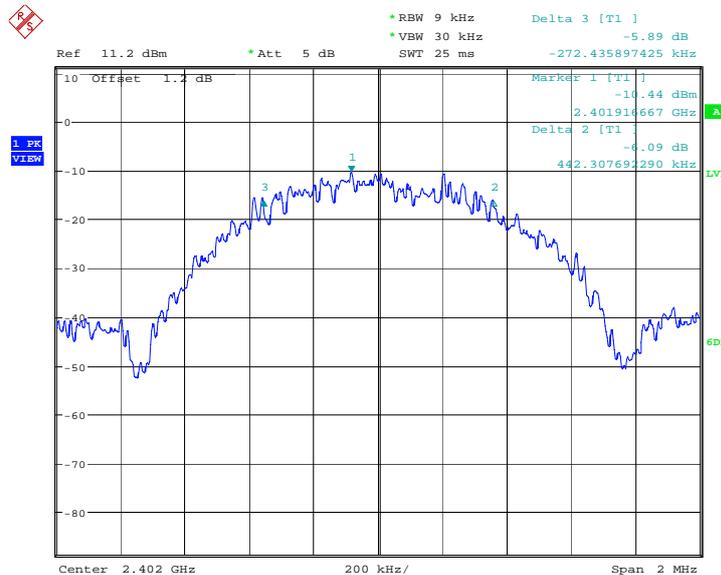


Date: 8.APR.2013 02:39:11

Fig.30. 6dB Bandwidth: GFSK, 2402 MHz

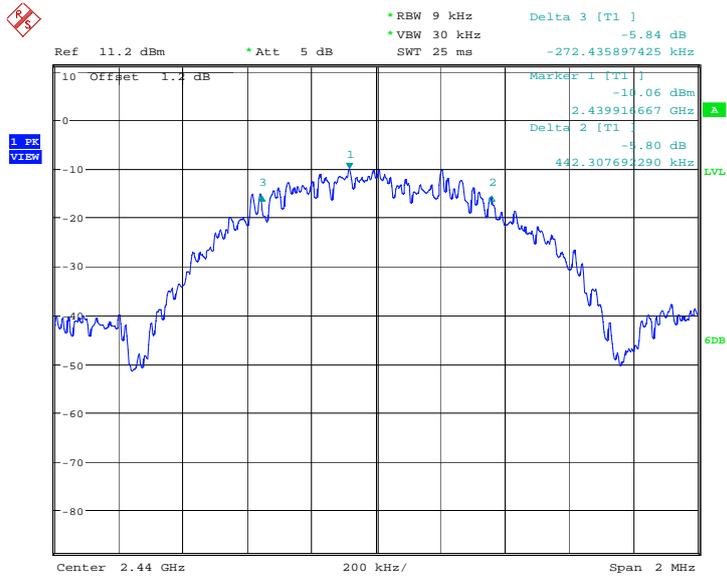

Date: 8.APR.2013 02:50:07

Fig.31. 6dB Bandwidth: GFSK, 2440 MHz

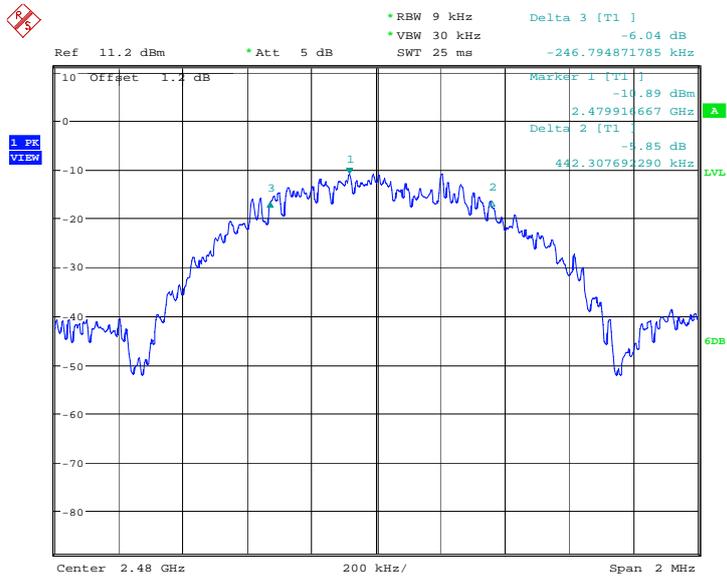

Date: 8.APR.2013 02:23:35

Fig.32. 6dB Bandwidth: GFSK, 2480 MHz

A.7. Maximum Power Spectral Density Level

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(e) RSS-210 A8.1	<=8.0dBm


The measurement is made according to the section 5.3.1 of KDB 558074: Use the peak marker function of spectrum analyzer to determine the maximum power level in any 100 kHz band. Then Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3\text{ kHz}/100\text{kHz} = -15.2\text{ dB})$

Measurement Results:

For GFSK


Frequency	Maximum Power Spectral Density Level(dBm)	Conclusion
2402MHz	Fig.33.	P
2440MHz	Fig.34.	P
2480MHz	Fig.35.	P

Test graphs as below:

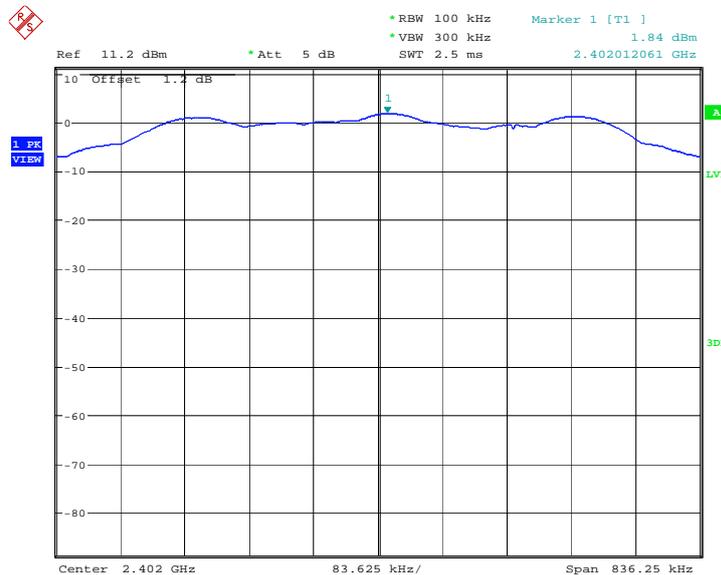


Date: 8.APR.2013 02:39:38

Fig.33. Maximum Power Spectral Density Level Function: GFSK, 2402 MHz

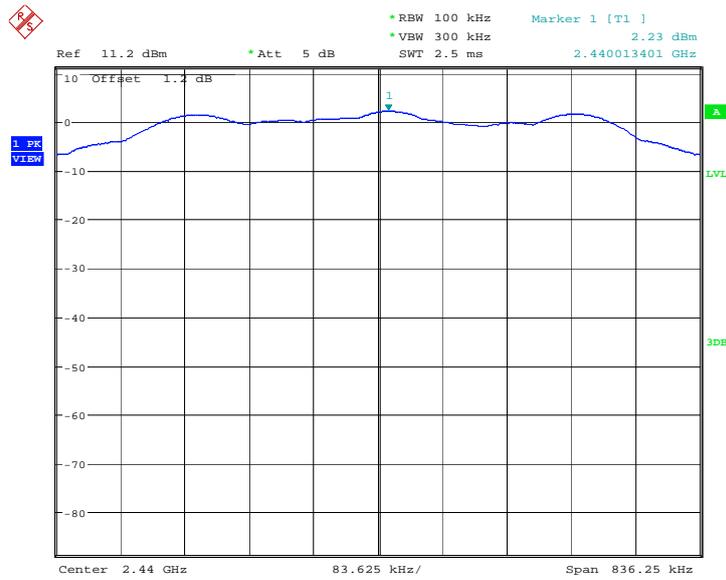

Date: 8.APR.2013 02:50:35

Fig.34. Maximum Power Spectral Density Level Function: GFSK, 2440 MHz

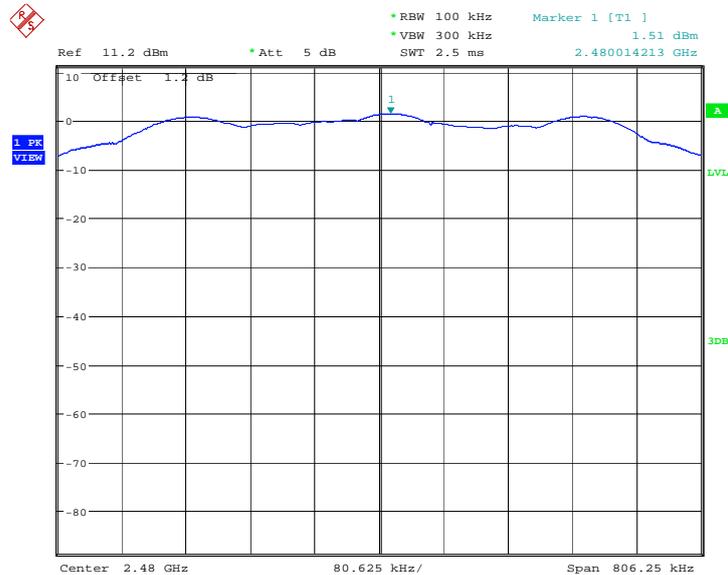

Date: 8.APR.2013 02:24:02

Fig.35. Maximum Power Spectral Density Level Function: GFSK, 2480 MHz

A. 8. AC Powerline Conducted Emission

Test Condition

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With Charger		
0.15 to 0.5	66 o 56	Fig.36. (TX Mode)	Fig.37. (Idle Mode)	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With Charger		
0.15 to 0.5	56 to 46	Fig.36 (TX Mode)	Fig.37 (Idle Mode)	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to KDB 558074 and ANSI C63.10

Note: the graphic result above is the maximum of the measurements for both phase line and neutral line.

Conclusion: PASS

Test graphs as below:

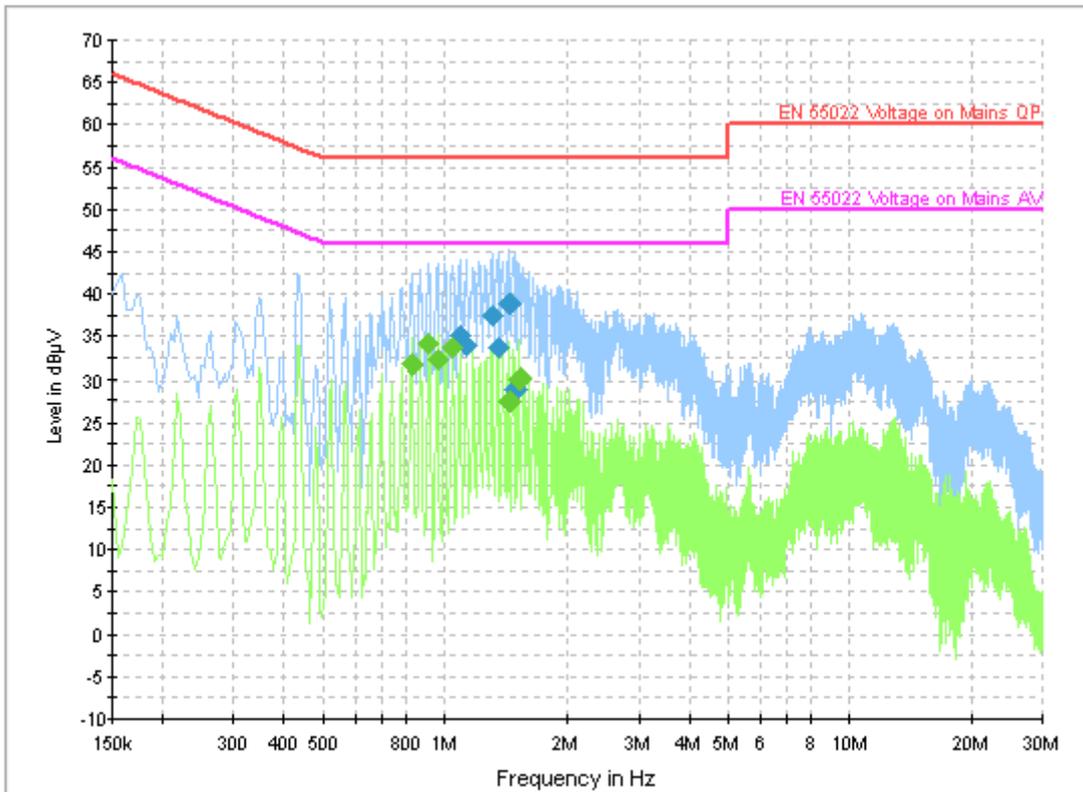


Fig.36 AC Powerline Conducted Emission with charger-TX Mode

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.095000	35.0	GND	L1	10.0	21.0	56.0
1.140000	33.9	GND	L1	10.0	22.1	56.0
1.311000	37.4	GND	L1	10.0	18.6	56.0
1.356000	33.8	GND	L1	10.0	22.2	56.0
1.441500	38.7	GND	L1	10.0	17.3	56.0
1.491000	28.8	GND	L1	10.0	27.2	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.829500	31.8	GND	L1	10.0	14.2	46.0
0.915000	34.2	GND	L1	10.0	11.8	46.0
0.960000	32.3	GND	L1	10.0	13.7	46.0
1.045500	33.7	GND	L1	10.0	12.3	46.0
1.441500	27.5	GND	L1	10.0	18.5	46.0
1.527000	30.2	GND	L1	10.0	15.8	46.0

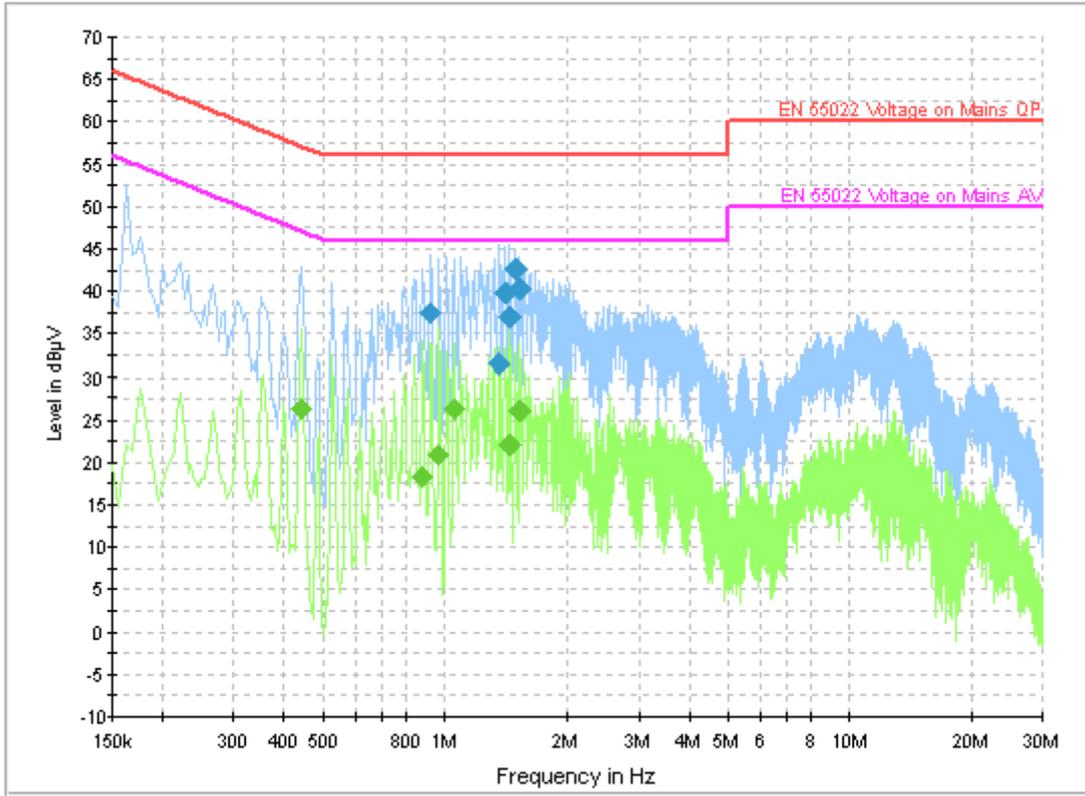


Fig.37 AC Powerline Conducted Emission with charger-Idle Mode

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.924000	37.5	GND	L1	10.0	18.5	56.0
1.365000	31.4	GND	L1	10.0	24.6	56.0
1.405500	39.9	GND	L1	10.0	16.1	56.0
1.450500	37.0	GND	L1	10.0	19.0	56.0
1.491000	42.7	GND	L1	10.0	13.3	56.0
1.536000	40.3	GND	L1	10.0	15.7	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.442500	26.2	GND	L1	10.0	20.8	47.0
0.883500	18.4	GND	L1	10.0	27.6	46.0
0.969000	20.8	GND	L1	10.0	25.2	46.0
1.054500	26.4	GND	L1	10.0	19.6	46.0
1.450500	22.0	GND	L1	10.0	24.0	46.0
1.536000	26.2	GND	L1	10.0	19.8	46.0

A.9 .Receiver Radiation Emission

Reference

FCC: CFR Part 15.109, 2.1053/ RSS-Gen 7.2.2

A.9.1 Method of Measurement

The measurement procedure in ANSI C64.4-2003 is used. The EUT is placed on a 80cm height non-conductive table locating on the center of turntable. From 30MHz-1GHz, the measurement distance is 10m. For frequency range above 1GHz, the measurement distance is 3m.


The EUT is measured with travel charger and the operating mode is idle without CMU200's signaling.

A.9.2 Method of Measurement

Frequency of Emission (MHz)	Limit (dB μ V/m)	Measurement Distance (m)
30-88	30	10
88-216	33.5	10
216-960	36	10
960-1000	44	10
>1000	54	3

A. 9.3 Measurement results


IF bandwidth: 120 kHz

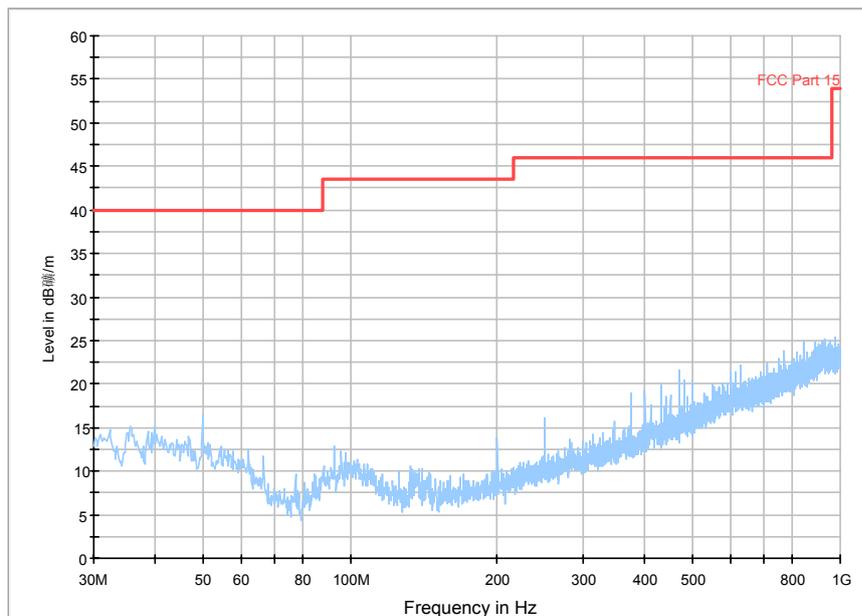

Idle Mode: 30MHz-1GHz

RBW / VBW 1 MHz


RE - 1GHz-3GHz

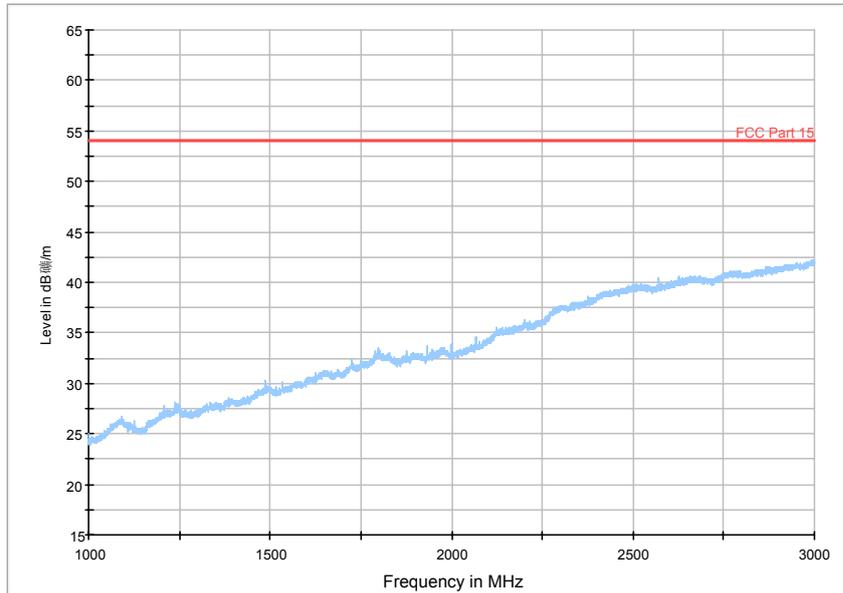

Idle Mode: 1GHz-3GHz

RBW / VBW 1 MHz

RE - 3GHz-18GHz

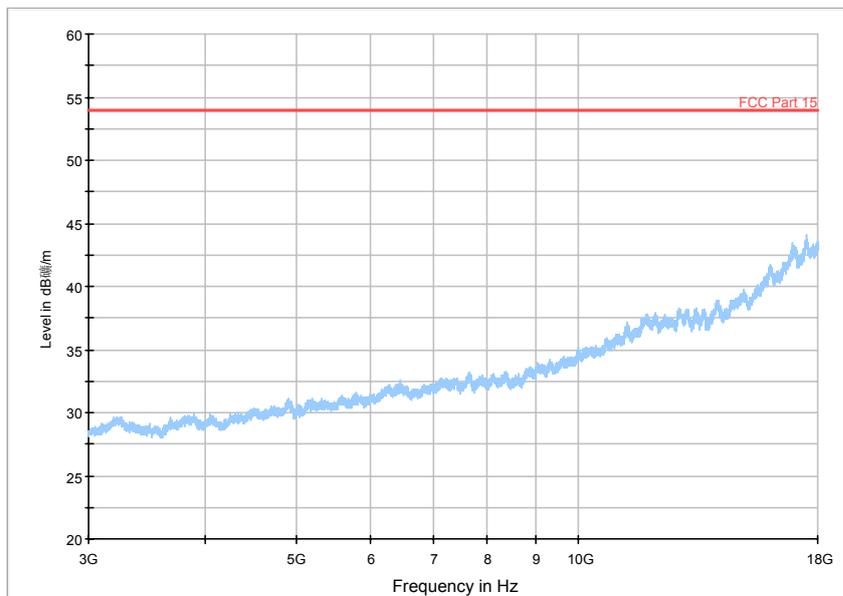

Idle Mode: 3GHz-18GHz

ANNEX B: Photographs of the Test Set-up**Photo 1:****Photo 2:**

ANNEX C: Photographs of the EUT



Mobile Phone



Mobile Phone



Mobile Phone



Mobile Phone



Mobile Phone



Mobile Phone



Label of Mobile Phone




Mobile Phone Disassembly



Mobile Phone Disassembly




Mobile Phone Disassembly

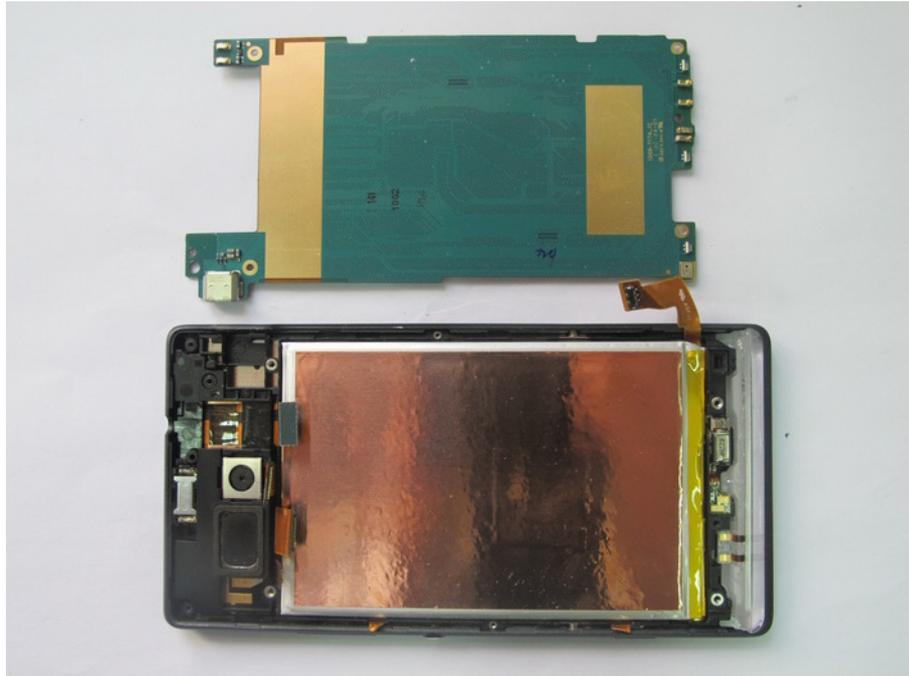


Mobile Phone Disassembly



Mobile Phone Disassembly

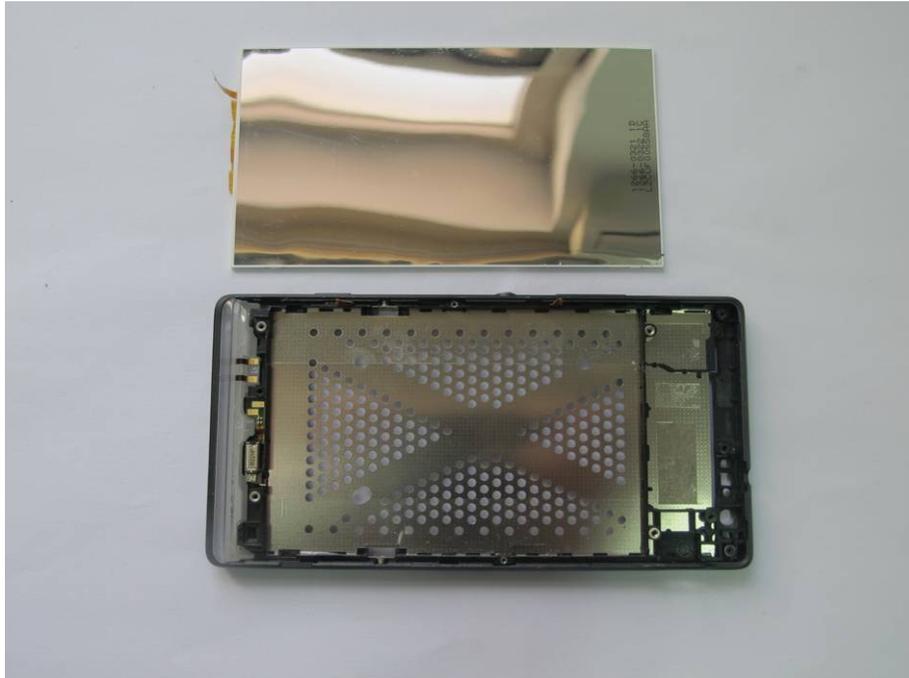


Mobile Phone Disassembly

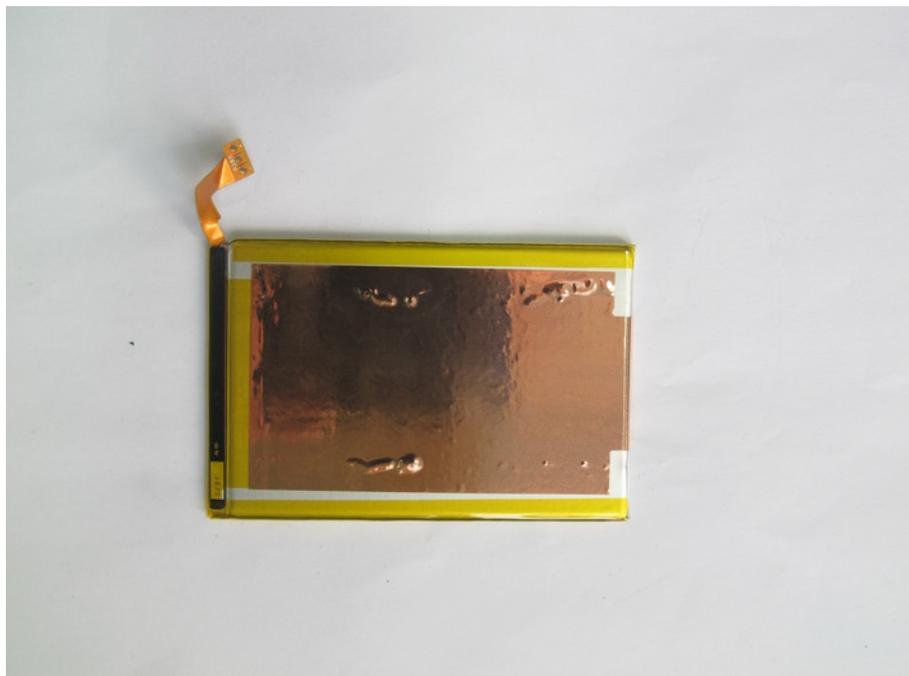

Li-Polymer Battery



USB Cable

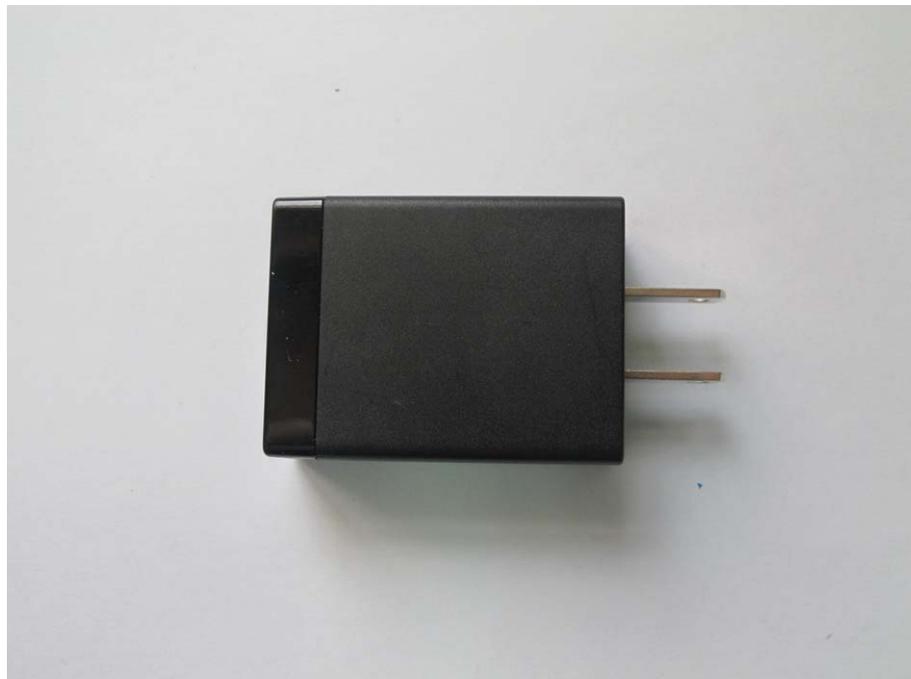

Travel Charger



Label of Travel Charger

***** END OF REPORT BODY *****