FCC PART 15C TEST REPORT

No. 2013TAR292

for

Sony Mobile Communications AB

GSM 850/900/1800/1900 quad bands and CDMA2000 850/1900

dual bands mobile phone

Type: PM-0370-BV

FCC ID: PY7PM-0370

with

Hardware Version: A

Software Version: 12.0.B.1.36

Issued Date: 2013-04-18

DAkkS Deutsche Akkreditierungsstelle D-PL-12123-01-01

DAR accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01
FCC 2.948 Listed: No.733176
IC O.A.T.S listed: No.6629B

Note: The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:
TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology
Shouxiang Science Building, No 51, Xueyuan Road, Haidian District, Beijing, P.R.China 100191
Tel:+86(0)10-62304633-2678, Fax:+86(0)10-62304793 Email:welcome@emcite.com. www.emcite.com

©Copyright. All rights reserved by TMC Beijing.

CONTENTS

CONTENTS 2

1. TEST LABORATORY 4

1.1. TESTING LOCATION 4
1.2. TESTING ENVIRONMENT 4
1.3. PROJECT DATA 4
1.4. SIGNATURE 4

2. CLIENT INFORMATION 5

2.1. APPLICANT INFORMATION 5
2.2. MANUFACTURER INFORMATION 5

3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) 6

3.1. ABOUT EUT 6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST 6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST 6
3.4. NORMAL ACCESSORY SETTING 7
3.5. GENERAL DESCRIPTION 7

4. REFERENCE DOCUMENTS 8

4.1. DOCUMENTS SUPPLIED BY APPLICANT 8
4.2. REFERENCE DOCUMENTS FOR TESTING 8

5. LABORATORY ENVIRONMENT 9

6. SUMMARY OF TEST RESULTS 10

6.1. SUMMARY OF TEST RESULTS 10
6.2. STATEMENTS 11
6.3. TEST CONDITIONS 11

7. TEST EQUIPMENTS UTILIZED 12

ANNEX A: MEASUREMENT RESULTS 13

A.1. MEASUREMENT METHOD 13
A.2. PEAK OUTPUT POWER 15
A.2.1 Antenna gain 15
A.2.2 Conducted Output Power 15
A.2.3 Radiated Output Power 15
A.3. FREQUENCY BAND EDGES - CONDUCTED 17
A.4. CONDUCTED EMISSION 24
A.5. RADIATED EMISSION 48
A.6. TIME OF OCCUPANCY (DWELL TIME) 69
A.7. 20DB BANDWIDTH 79
A.8. CARRIER FREQUENCY SEPARATION 85
A.9. NUMBER OF HOPPING CHANNELS 87

©Copyright. All rights reserved by TMC Beijing.

A.10. AC POWERLINE CONDUCTED EMISSION 91
A.11 RECEIVER RADIATION EMISSION 94

ANNEX B: PHOTOGRAPHS OF THE TEST SET-UP 97

ANNEX C: PHOTOGRAPHS OF THE EUT 98

©Copyright. All rights reserved by TMC Beijing.

1. Test Laboratory

1.1. Testing Location

Company Name:	TMC Beijing, Telecommunication Metrology Center of MIIT
Address:	Shouxiang Science Building, No 51, Xueyuan Road, Haidian District, Beijing, P.R.China
Postal Code:	100191
Telephone:	00861062304633
Fax:	00861062304793

1.2. Testing Environment

Normal Temperature:	15-35℃
Extreme Temperature:	-20/+55℃
Relative Humidity:	30-60%
Air Pressure	990hPa-1040hPa

Note: The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

1.3. Project data

Project Leader:	Zi Xiaogang
Testing Start Date:	2013-04-02
Testing End Date:	2013-04-15

1.4. Signature

Zi Xiaogang

(Prepared this test report)

Sun Xiangqian

(Reviewed this test report)

Lu Bingsong

Deputy Director of the laboratory

(Approved this test report)

©Copyright. All rights reserved by TMC Beijing.

2. Client Information

2.1. Applicant Information

Company Name:	Sony Mobile Communications (China) Co. Ltd
Address /Post:	Sony Mobile R&D Center, No. 16, Guangshun South Street, Chaoyang District
City:	Beijing
Postal Code:	100102
Country:	China
Contact	Ma, Gang
Telephone:	+86-10-58656312
Fax:	+86-10-58659049

2.2. Manufacturer Information

Company Name:	Sony Mobile Communications AB
Address /Post:	Nya Vattentornet, 22188 Lund, Sweden
City:	Lund
Postal Code:	22188
Country:	Sweden
Contact	Nordlof, Anders
Telephone:	+46-10-802 3919
Fax:	+46-10-800 2441

©Copyright. All rights reserved by TMC Beijing.

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Sony Mobile Communications AB GSM 850/900/1800/1900 quad bands and CDMA2000 850/1900 dual bands mobile phone
Type	PM-0370-BV
FCC ID	PY7PM-0370
Frequency Range	ISM 2400MHz~2483.5MHz
Type of Modulation	GFSK/π/4 DQPSK/8DPSK
Number of Channels	79
Cellular Frequency Band	GSM 850/900/1800/1900, GPRS, EDGE, CDMA2000 Band Class0/1
Antenna	Integrated Antenna
MAX Radiated Power	6.74dBm EIRP(8DPSK)
MAX Conducted Power	8.10dBm(8DPSK)
Power Supply	3.7V DC by Battery

Note: Photographs of EUT are shown in ANNEX D of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	S/N	IMEI	HW Version	SW Version
#23869	CB5123NF8C	004402146474683	A	12.0.B.1.36
#23871	CB5123BF84	004402146474642	A	12.0.B.1.36

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Revision
AE1	Portable Hands-Free	12311A17001FAE	1
#23496	Travel Charger	8512W124400471	1C
#23813	USB Cable	123107D5000A46E	1

AE1

Type	CCA-0004017
Manufacturer	Sony Mobile
Length of cable	150cm

#23496

Commercial name	EP880
Type	AC-0400-US
Manufacturer	Salcomp

©Copyright. All rights reserved by TMC Beijing.

#23813

Commercial name	EC801
Type	AI-0401
Manufacturer	Sony Mobile
Length of cable	96.5cm

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory Setting

1. Fully charged battery was used during the test;

3.5. General Description

The Equipment Under Test (EUT) is a model of GSM 850/900/1800/1900 quad bands and CDMA2000 850/1900 dual bands mobile phone with integrated antenna and inbuilt battery.

The EUT supports two SIM card slots.

GSM SIM card slot supports GSM 900/1800/1900MHz bands. It also supports GPRS service with multi-slots class 8 and EGPRS service with multi-slots class 8 too.

CTC SIM card slot supports GSM 850/900/1800/1900MHz bands and CDMA2000 bands 0/1. It also supports GPRS service with multi-slots class 12 and EGPRS service with multi-slots class 12 too.

It has MP3, camera, FM radio, USB memory, GPS receiver, NFC, Mobile High-Definition Link (MHL), Bluetooth (EDR and Bluetooth 4.0), WLAN (802.11 b/g/n) and Wi-Fi hotspot functions.

It includes normal option: travel charger, Portable Hands-Free and USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

©Copyright. All rights reserved by TMC Beijing.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	10-1-12 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009
FCC Public Notice DA 00-705	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems	March 2000
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009

©Copyright. All rights reserved by TMC Beijing.

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 ℃, Max. = 30 ℃
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

Control room/ conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 ℃, Max. = 35 ℃
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 ℃, Max. = 30 ℃
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber2 (8.6 meters×6.1 meters×3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 ℃, Max. = 30 ℃
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Fully-anechoic chamber3 (10 meters×6.7 meters×6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 ℃, Max. = 30 ℃
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz

Additional Humidity Requirements for Electrostatic Discharge Test: Min. = 30%, Max. = 60%.

©Copyright. All rights reserved by TMC Beijing.

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Modulation	Sub-clause of Part15C	Verdict
Peak Output Power (Conducted)	GFSK/	15.247 (b)(1)	P
	π/4DQPSK		P
	8DPSK		P
Peak Output Power(Radiated)	GFSK	15.247 (b)(1)	P
Antenna Gain	GFSK/	None	P
Frequency Band Edges	GFSK	15.247 (d)	P
	π/4DQPSK		P
	8DPSK		P
Conducted Emission	GFSK	15.247 (d)	P
	π/4DQPSK		P
	8DPSK		P
Radiated Emission	GFSK	15.247(d),15.205, 15.209,15.109	P
	π/4DQPSK		P
	8DPSK		P
Time of Occupancy (Dwell Time)	GFSK	15.247 (a) (1)(iii)	P
	π/4DQPSK		P
	8DPSK		P
20dB Bandwidth	GFSK	15.247 (a)(1)	P
	π/4DQPSK		P
	8DPSK		P
Carrier Frequency Separation	GFSK	15.247 (a)(1)	P
	π/4DQPSK		P
	8DPSK		P
Number of hopping channels	GFSK	15.247 (a)(1)(iii)	P
	π/4DQPSK		P
	8DPSK		P
AC Powerline Conducted Emission	GFSK	15.107, 15.207	P

Please refer to **ANNEX A** for detail.

The measurement is made according to Public notice DA 00-705 and ANSI C63.4.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by TMC
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

©Copyright. All rights reserved by TMC Beijing.

6.2. Statements

The test cases as listed in section 6.1 of this report for the EUT specified in section 3 was performed by TMC and according to the standards or reference documents listed in section 4.2 The EUT met all requirements of the standards or reference documents.

6.3. Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage
V min	Low Voltage
V max	High Voltage
H nom	Norm Humidity
A nom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	T nom	25℃
Voltage	V nom	3.7V(By battery)
Humidity	H nom	39%
Air Pressure	A nom	1015hPa

©Copyright. All rights reserved by TMC Beijing.

7. Test Equipments Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Vector Signal Analyzer	FSU26	200030	Rohde & Schwarz	2013-12-18
2	Bluetooth Tester	CBT32	100649	Rohde & Schwarz	2014-02-03

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Test Receiver	ESU26	100376	Rohde & Schwarz	2013-11-07
2	EMI Antenna	VULB 9163	514	Schwarzbeck	2014-11-10
3	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31
4	Dual-Ridge Waveguide Horn Antenna	3116	2663	ETS-Lindgren	2014-06-30
5	Dual-Ridge Waveguide Horn Antenna	3116	2661	ETS-Lindgren	2014-06-30
6	Universal Radio Communication Tester	CMU200	109914	Rohde & Schwarz	2014-04-18
7	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	2014-04-15
8	Pre-amplifier(18GHz)	/	1005277	Rohde & Schwarz	/
9	Pre-amplifier(26.5GHz)	/	1005277	Rohde & Schwarz	/

Anechoic chamber

Fully anechoic chamber by Frankonia German.

©Copyright. All rights reserved by TMC Beijing.

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

The measurement is made according to Public notice DA 00-705 and ANSI C63.4.

1). Connect the EUT to the test system correctly.

2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).

3). Set the EUT to the required channel.

4). Set the EUT hopping mode (hopping or hopping off).

5). Set the spectrum analyzer to start measurement.

6). Record the values. Vector Signal Analyzer

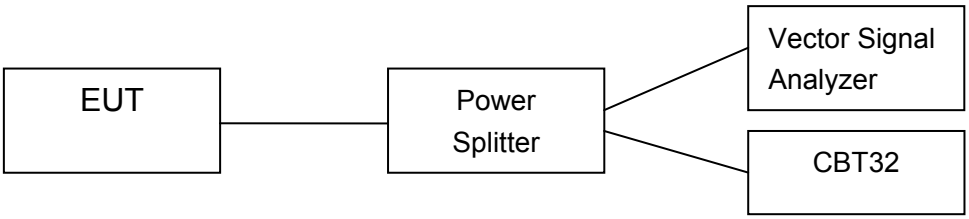

A.1.2. Radiated Emission Measurements

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

The radiated emission test is performed in semi-anechoic chamber. The distance from the EUT to the reference point of measurement antenna is 3m. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated 360° and the measurement antenna is moved from 1m to 4m to get the maximization result.

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 1MHz;

©Copyright. All rights reserved by TMC Beijing.

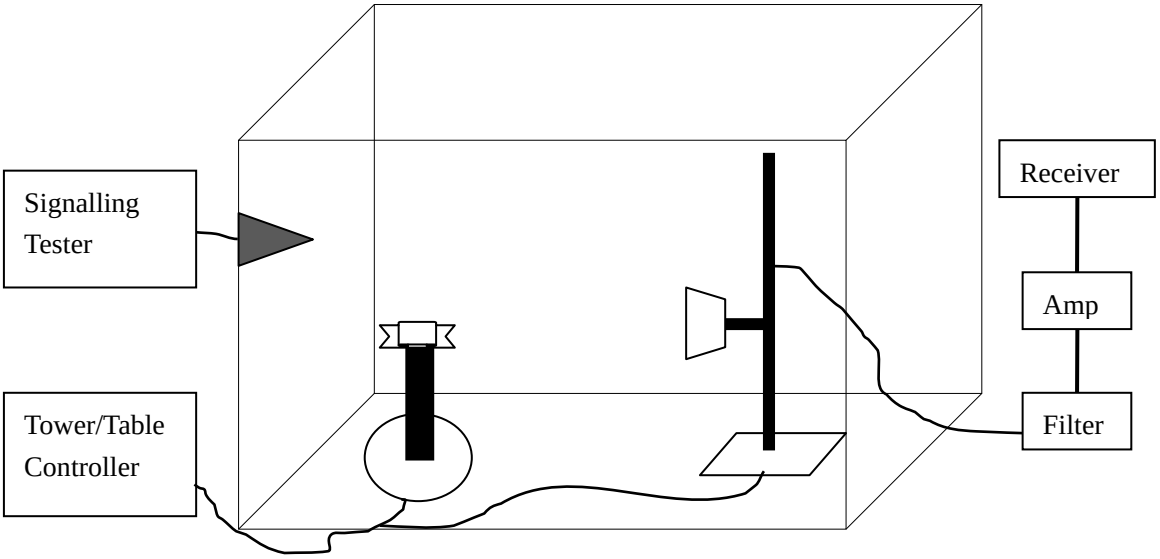

©Copyright. All rights reserved by TMC Beijing.

A.2. Peak Output Power

Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(1) / RSS-210 A8.4 (2)	< 30

The measurement is made according to Public notice DA 00-705 and ANSI C63.4.

Measurement Results:

A.2.1 Antenna gain

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the EUT.

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz
GFSK (Conducted)	5.88	6.36	6.60
GFSK (Radiated)	4.25	5.20	4.22
Gain(dBi)	-1.63	-1.16	-2.38

Conclusion: PASS

A.2.2 Conducted Output Power

Peak(RBW=VBW=1MHz; SPAN=5MHz; Detector: Peak)

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
GFSK (dBm)	5.88	6.36	6.60	P
π/4 DQPSK (dBm)	7.01	7.45	7.65	P
8DPSK (dBm)	7.44	7.90	8.10	P

Average(RBW=VBW=1MHz; SPAN=5MHz; Detector: RMS)

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
GFSK (dBm)	5.48	6.03	6.21	P
π/4 DQPSK (dBm)	4.04	4.49	4.75	P
8DPSK (dBm)	4.11	4.56	4.77	P

Measurement Uncertainty: ±1.17dB

Conclusion: PASS

A.2.3 Radiated Output Power

Peak(RBW=VBW=1MHz; SPAN=5MHz; Detector: Peak)

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz	Conclusion
GFSK (dBm)	4.25	5.20	4.22	P
π/4 DQPSK* (dBm)	5.38	6.29	5.27	P
8DPSK* (dBm)	5.81	6.74	5.72	P

Average

Channel	Ch 0	Ch 39	Ch 78	Conclusion

©Copyright. All rights reserved by TMC Beijing.

	2402 MHz	2441 MHz	2480 MHz	
GFSK * (dBm)	3.85	4.87	3.83	P
π/4 DQPSK * (dBm)	2.41	3.33	2.37	P
8DPSK * (dBm)	2.48	3.40	2.39	P

Note:* These values are calculated with the antenna gain

Measurement Uncertainty: ±1.98dB

Conclusion: PASS

©Copyright. All rights reserved by TMC Beijing.

A.3. Frequency Band Edges - Conducted

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d) RSS-210 A8.4(2)	<-20 Note：The measurement results are calculated as power measured in any 100KHz bandwidth outside the frequency band in dBm minus power measured in the 100 kHz bandwidth within the band that contains the highest level of the desired power

The measurement is made according to Public notice DA 00-705 and ANSI C63.4.

Measurement Result:

For GFSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.1	-57.33	P
	Hopping ON	Fig.2	-57.25	P
78	Hopping OFF	Fig.3	-62.32	P
	Hopping ON	Fig.4	-62.89	P

Forπ/4 DQPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.5	-55.13	P
	Hopping ON	Fig.6	-55.46	P
78	Hopping OFF	Fig.7	-61.62	P
	Hopping ON	Fig.8	-59.81	P

For 8DPSK

Channel	Hopping	Band Edge Power (dBc)		Conclusion
0	Hopping OFF	Fig.9	-56.28	P
	Hopping ON	Fig.10	-55.06	P
78	Hopping OFF	Fig.11	-61.67	P
	Hopping ON	Fig.12	-61.80	P

Conclusion: PASS

Test graphs as below

©Copyright. All rights reserved by TMC Beijing.

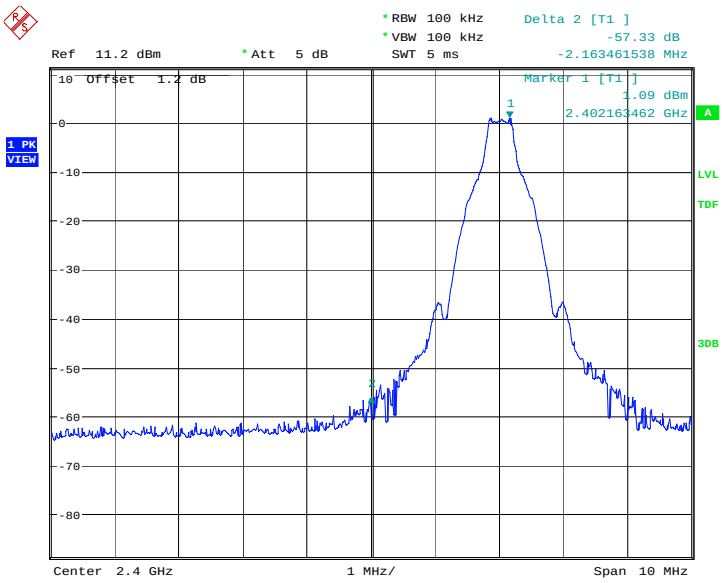

Date: 8.APR.2013 09:19:54

Fig.1. Frequency Band Edges: GFSK, Channel 0, Hopping Off

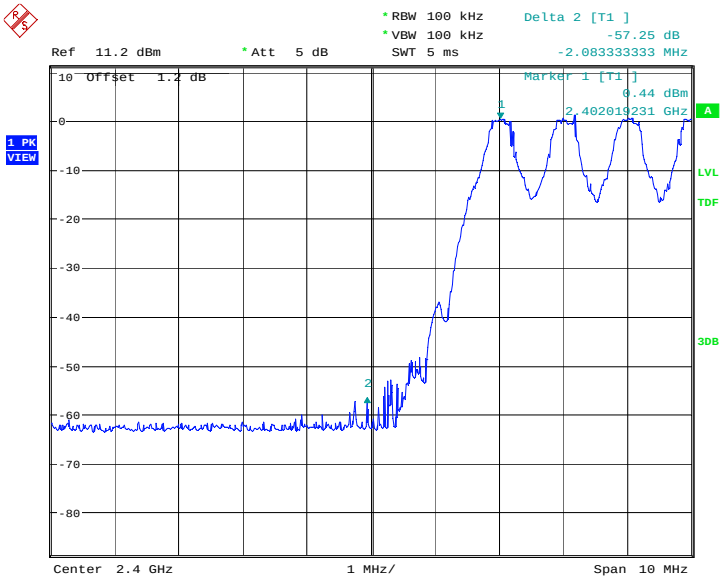

Date: 8.APR.2013 09:22:14

Fig.2. Frequency Band Edges: GFSK, Channel 0, Hopping On

©Copyright. All rights reserved by TMC Beijing.

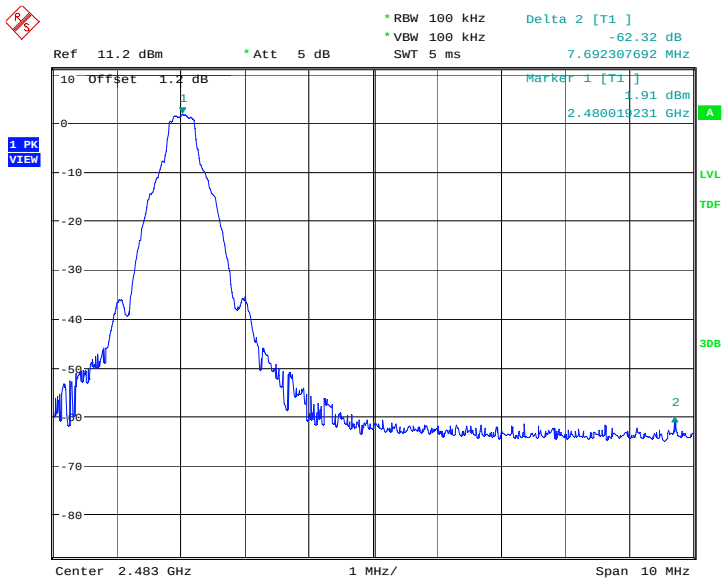

Date: 8.APR.2013 09:20:12

Fig.3. Frequency Band Edges: GFSK, Channel 78, Hopping Off

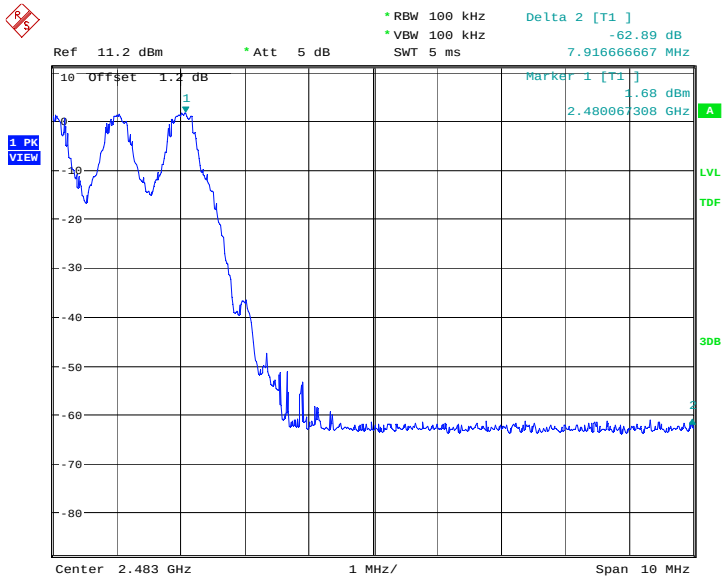

Date: 8.APR.2013 09:24:16

Fig.4. Frequency Band Edges: GFSK, Channel 78, Hopping On

©Copyright. All rights reserved by TMC Beijing.

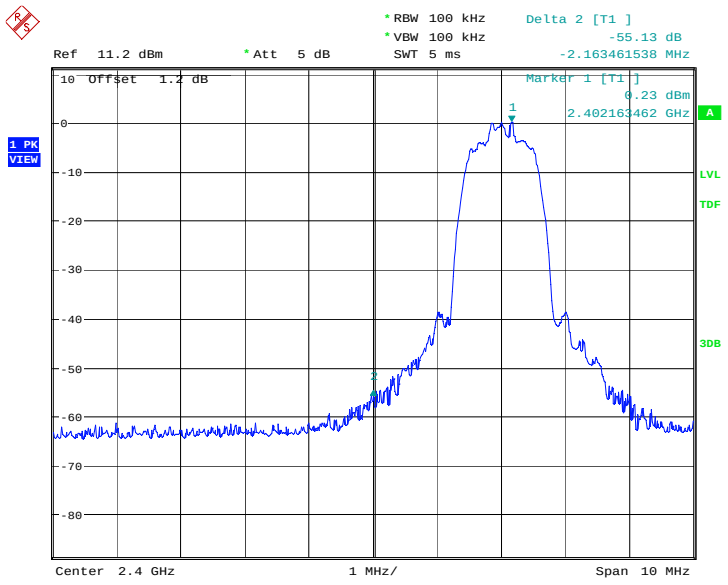

Date: 8.APR.2013 09:41:21

Fig.5. Frequency Band Edges: π/4 DQPSK, Channel 0, Hopping Off

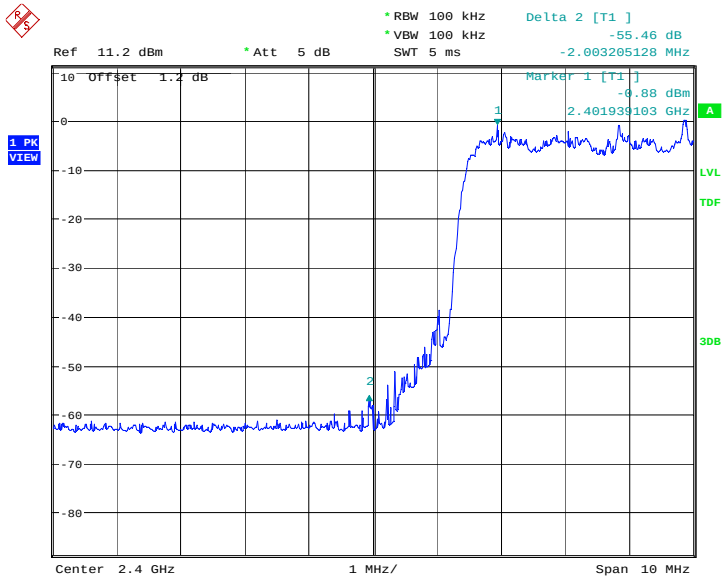

Date: 8.APR.2013 09:43:41

Fig.6. Frequency Band Edges: π/4 DQPSK, Channel 0, Hopping On

©Copyright. All rights reserved by TMC Beijing.

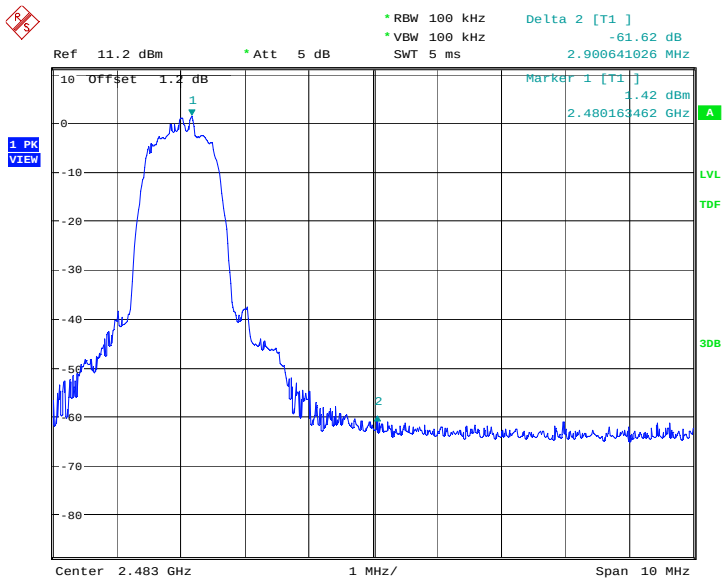

Date: 8.APR.2013 09:41:38

Fig.7. Frequency Band Edges: π/4 DQPSK, Channel 78, Hopping Off

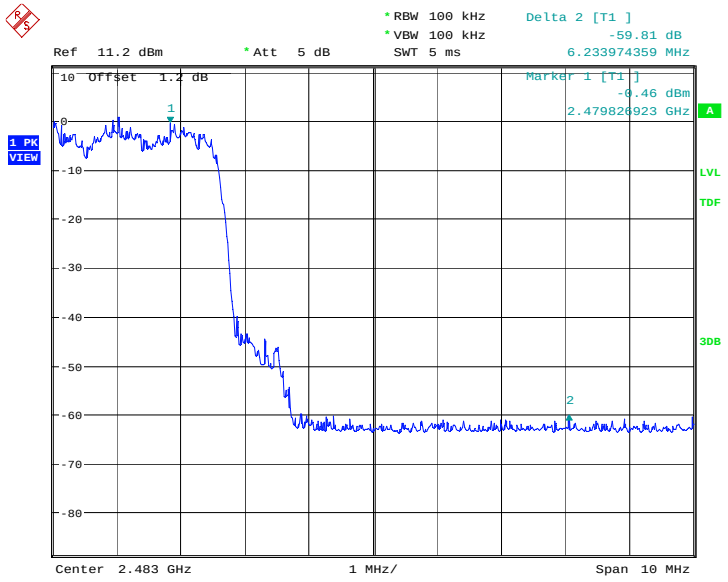

Date: 8.APR.2013 09:45:43

Fig.8. Frequency Band Edges: π/4 DQPSK, Channel 78, Hopping On

©Copyright. All rights reserved by TMC Beijing.

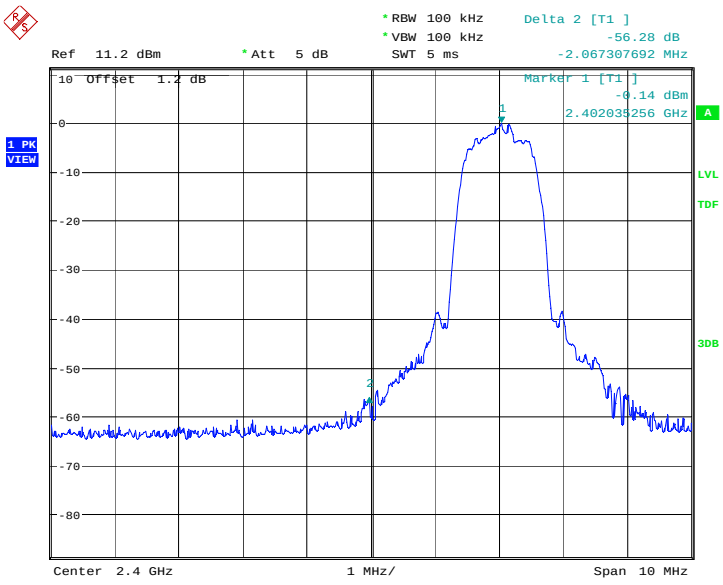

Date: 8.APR.2013 10:02:49

Fig.9. Frequency Band Edges: 8DPSK, Channel 0, Hopping Off

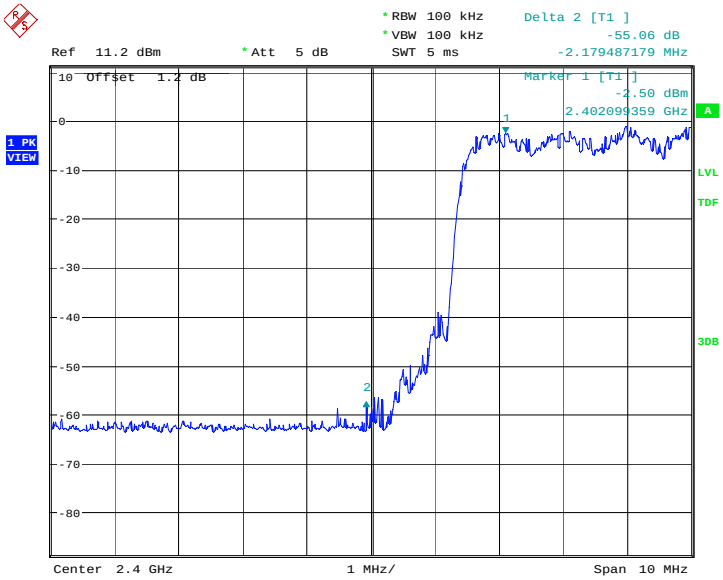

Date: 8.APR.2013 10:05:09

Fig.10. Frequency Band Edges: 8DPSK, Channel 0, Hopping On

©Copyright. All rights reserved by TMC Beijing.

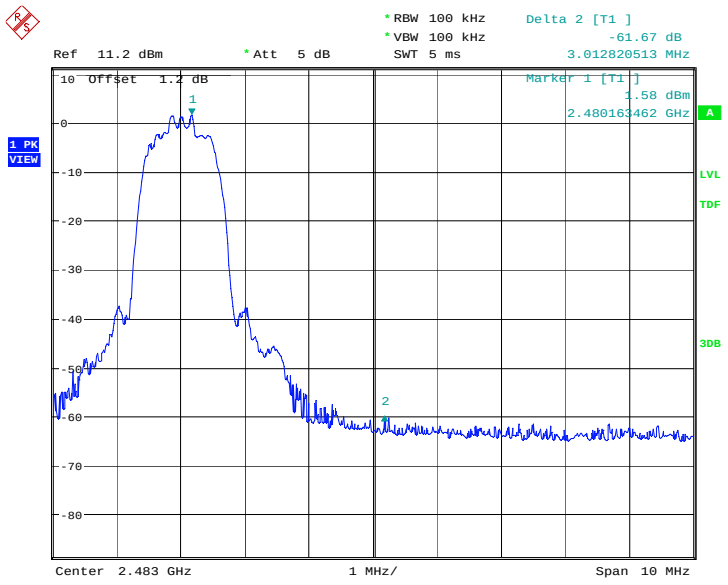

Date: 8.APR.2013 10:03:06

Fig.11. Frequency Band Edges: 8DPSK, Channel 78, Hopping Off

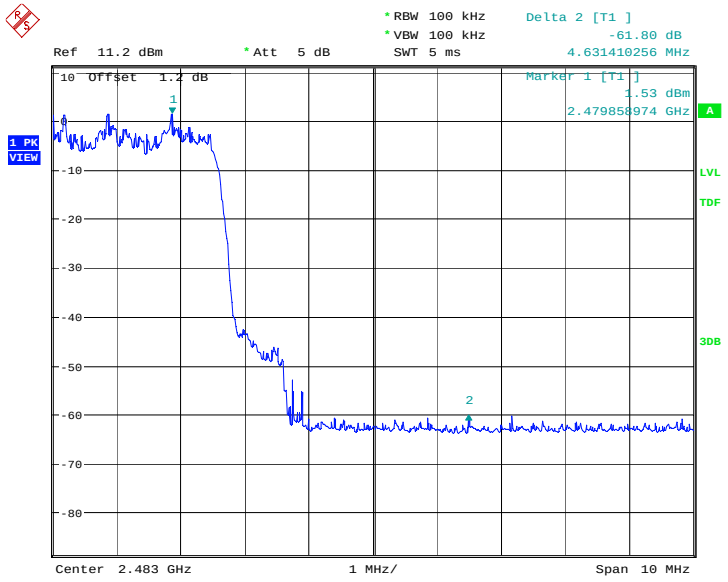

Date: 8.APR.2013 10:07:11

Fig.12. Frequency Band Edges: 8DPSK, Channel 78, Hopping On

©Copyright. All rights reserved by TMC Beijing.

A.4. Conducted Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d) RSS-210 A8.5	20dB below peak output power in 100 kHz bandwidth

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

Measurement Results:

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.13	P
	30 MHz ~ 1 GHz	Fig.14	P
	1 GHz ~ 3 GHz	Fig.15	P
	3 GHz ~ 10 GHz	Fig.16	P
	10 GHz ~ 26 GHz	Fig.17	P
Ch 39 2441 MHz	Center Frequency	Fig.18	P
	30 MHz ~ 1 GHz	Fig.19	P
	1 GHz ~ 3 GHz	Fig.20	P
	3 GHz ~ 10 GHz	Fig.21	P
	10 GHz ~ 26 GHz	Fig.22	P
Ch 78 2480 MHz	Center Frequency	Fig.23	P
	30 MHz ~ 1 GHz	Fig.24	P
	1 GHz ~ 3 GHz	Fig.25	P
	3 GHz ~ 10 GHz	Fig.26	P
	10 GHz ~ 26 GHz	Fig.27	P

For π/4 DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.28	P
	30 MHz ~ 1 GHz	Fig.29	P
	1 GHz ~ 3 GHz	Fig.30	P
	3 GHz ~ 10 GHz	Fig.31	P
	10 GHz ~ 26 GHz	Fig.32	P
Ch 39 2441 MHz	Center Frequency	Fig.33	P
	30 MHz ~ 1 GHz	Fig.34	P
	1 GHz ~ 3 GHz	Fig.35	P
	3 GHz ~ 10 GHz	Fig.36	P
	10 GHz ~ 26 GHz	Fig.37	P
Ch 78 2480 MHz	Center Frequency	Fig.38	P
	30 MHz ~ 1 GHz	Fig.39	P

©Copyright. All rights reserved by TMC Beijing.

	1 GHz ~ 3 GHz	Fig.40	P
	3 GHz ~ 10 GHz	Fig.41	P
	10 GHz ~ 26 GHz	Fig.42	P

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	Center Frequency	Fig.43	P
	30 MHz ~ 1 GHz	Fig.44	P
	1 GHz ~ 3 GHz	Fig.45	P
	3 GHz ~ 10 GHz	Fig.46	P
	10 GHz ~ 26 GHz	Fig.47	P
Ch 39 2441 MHz	Center Frequency	Fig.48	P
	30 MHz ~ 1 GHz	Fig.49	P
	1 GHz ~ 3 GHz	Fig.50	P
	3 GHz ~ 10 GHz	Fig.51	P
	10 GHz ~ 26 GHz	Fig.52	P
Ch 78 2480 MHz	Center Frequency	Fig.53	P
	30 MHz ~ 1 GHz	Fig.54	P
	1 GHz ~ 3 GHz	Fig.55	P
	3 GHz ~ 10 GHz	Fig.56	P
	10 GHz ~ 26 GHz	Fig.57	P

Conclusion: PASS

Test graphs as below

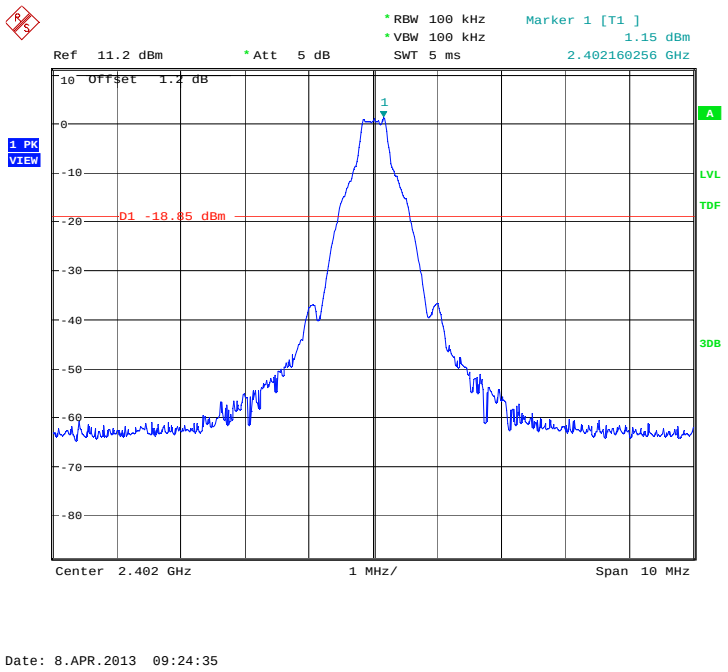

Fig.13. Conducted spurious emission: GFSK, Channel 0,2402MHz

©Copyright. All rights reserved by TMC Beijing.

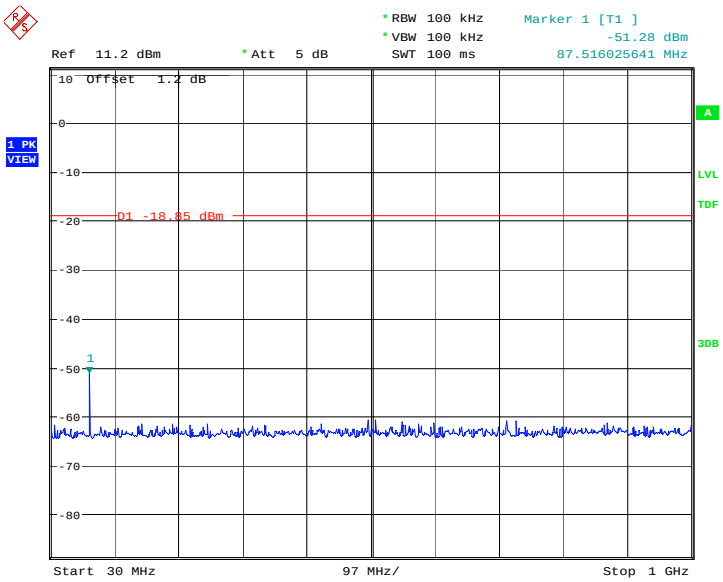

Date: 8.APR.2013 09:24:52

Fig.14. Conducted spurious emission: GFSK, Channel 0, 30MHz - 1GHz

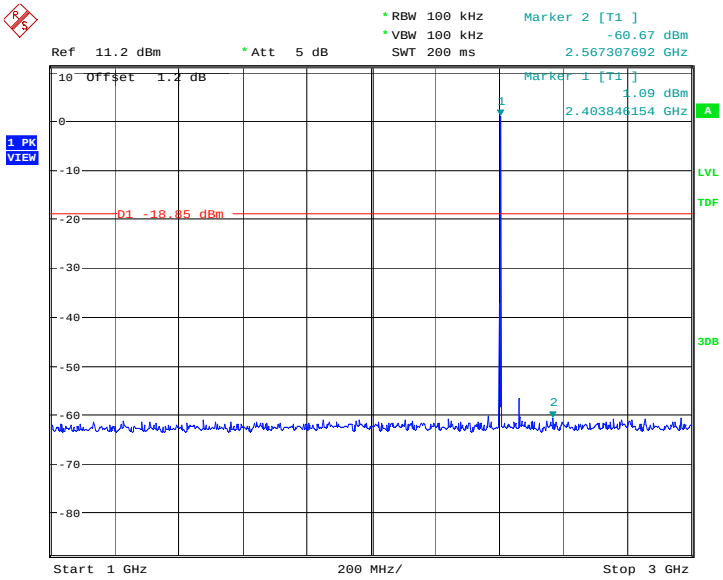

Date: 8.APR.2013 09:25:24

Fig.15. Conducted spurious emission: GFSK, Channel 0, 1GHz - 3GHz

©Copyright. All rights reserved by TMC Beijing.

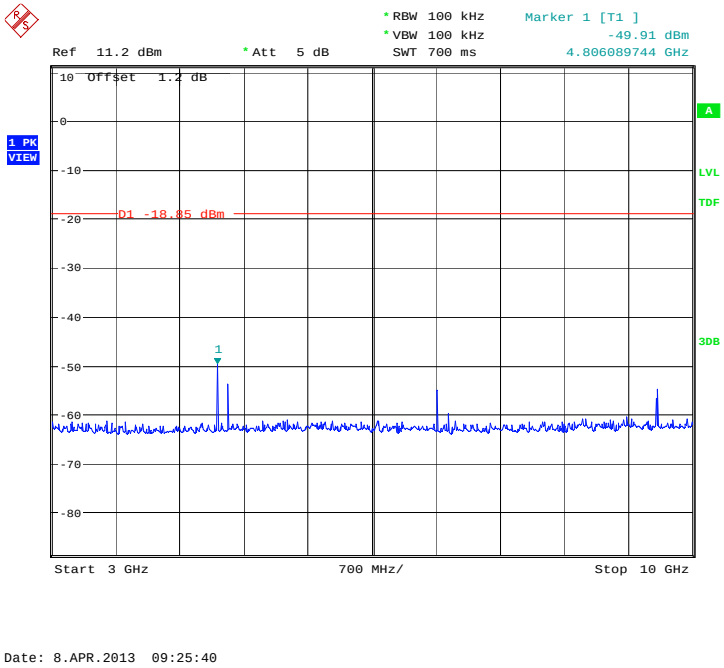

Fig.16. Conducted spurious emission: GFSK, Channel 0, 3GHz - 10GHz

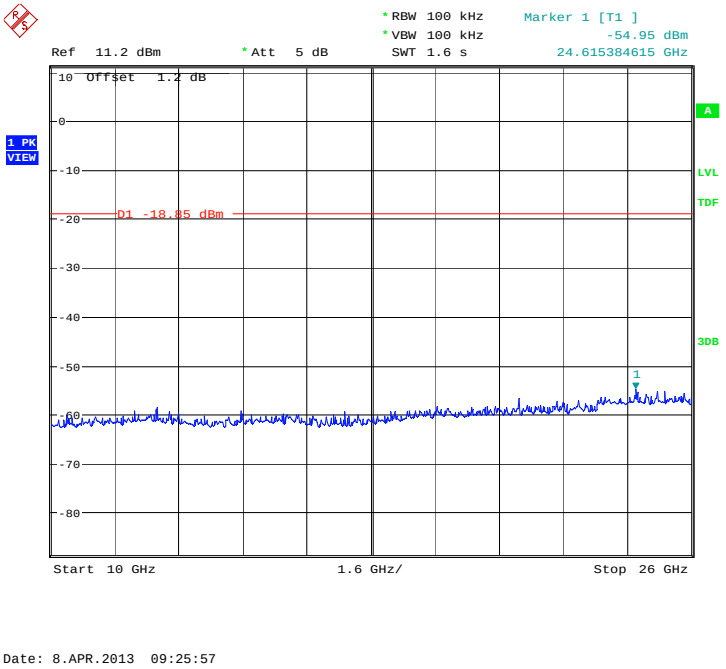

Fig.17. Conducted spurious emission: GFSK, Channel 0,10GHz - 26GHz

©Copyright. All rights reserved by TMC Beijing.

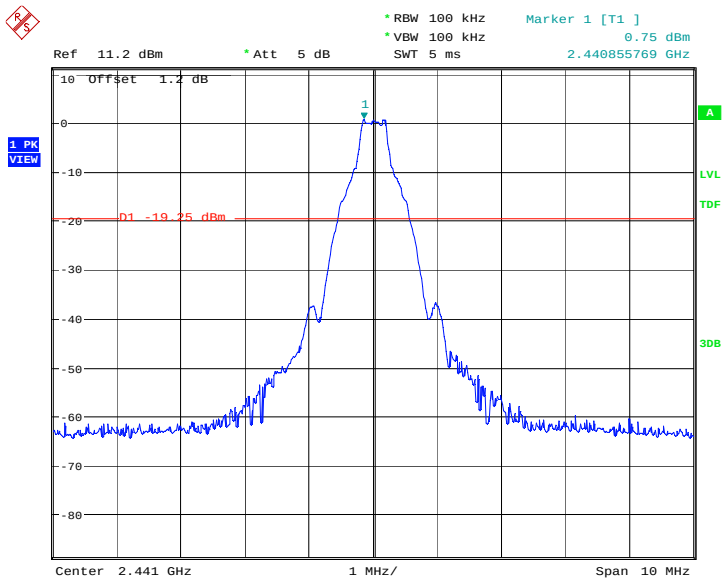

Date: 8.APR.2013 09:26:13

Fig.18. Conducted spurious emission: GFSK, Channel 39, 2441MHz

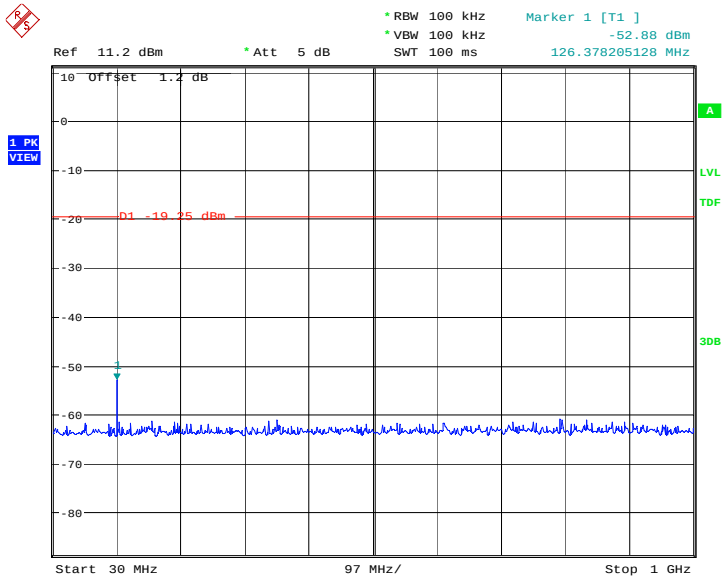

Date: 8.APR.2013 09:26:30

Fig.19. Conducted spurious emission: GFSK, Channel 39, 30MHz - 1GHz

©Copyright. All rights reserved by TMC Beijing.

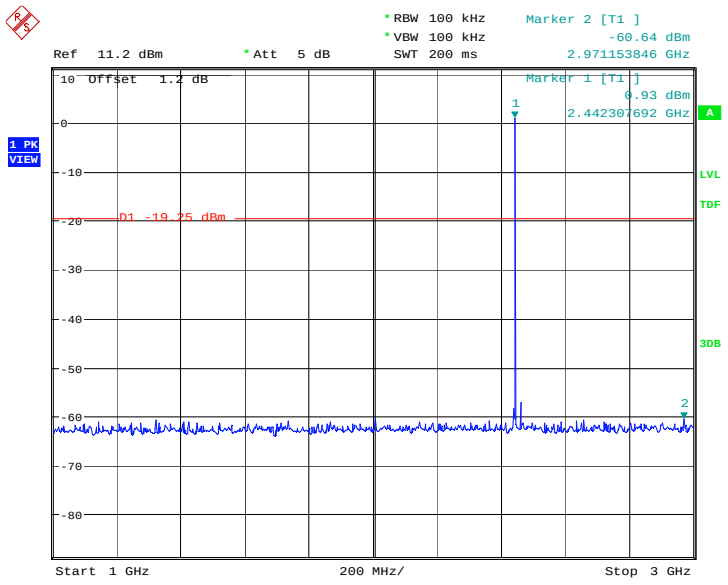

Date: 8.APR.2013 09:27:02

Fig.20. Conducted spurious emission: GFSK, Channel 39, 1GHz – 3GHz

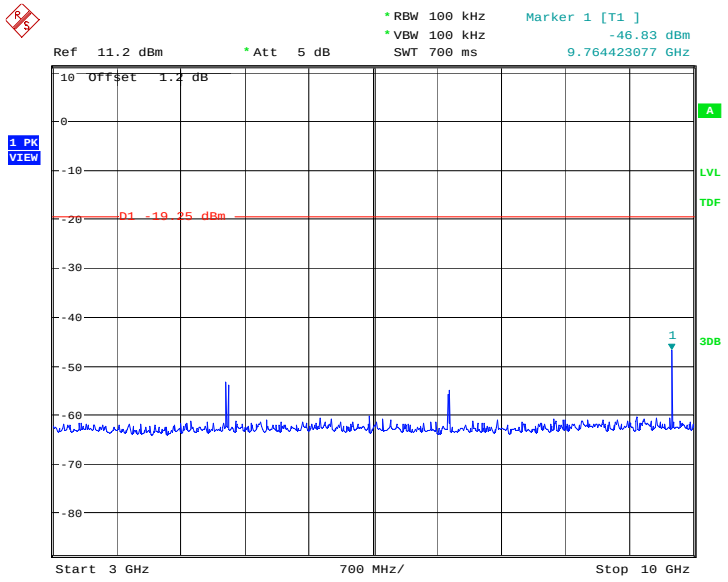

Date: 8.APR.2013 09:27:18

Fig.21. Conducted spurious emission: GFSK, Channel 39, 3GHz – 10GHz

©Copyright. All rights reserved by TMC Beijing.

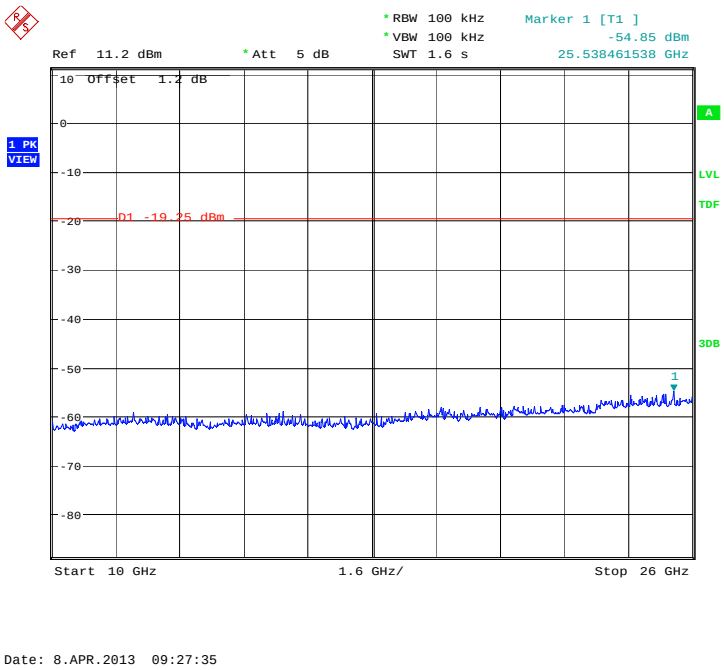

Fig.22. Conducted spurious emission: GFSK, Channel 39, 10GHz – 26GHz

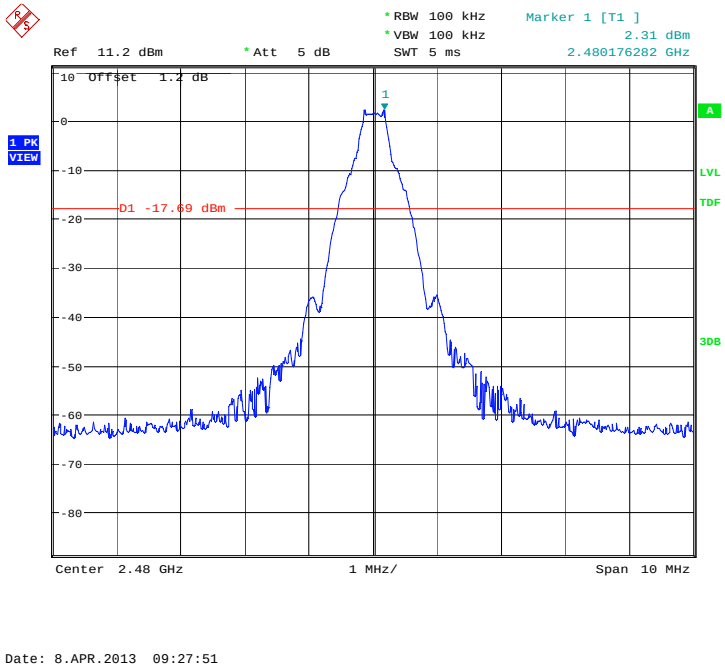

Fig.23. Conducted spurious emission: GFSK, Channel 78, 2480MHz

©Copyright. All rights reserved by TMC Beijing.

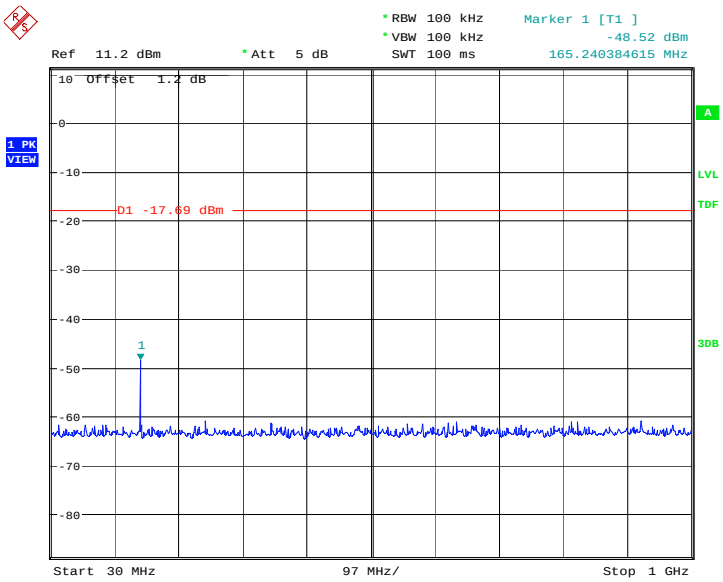

Date: 8.APR.2013 09:28:08

Fig.24. Conducted spurious emission: GFSK, Channel 78, 30MHz - 1GHz

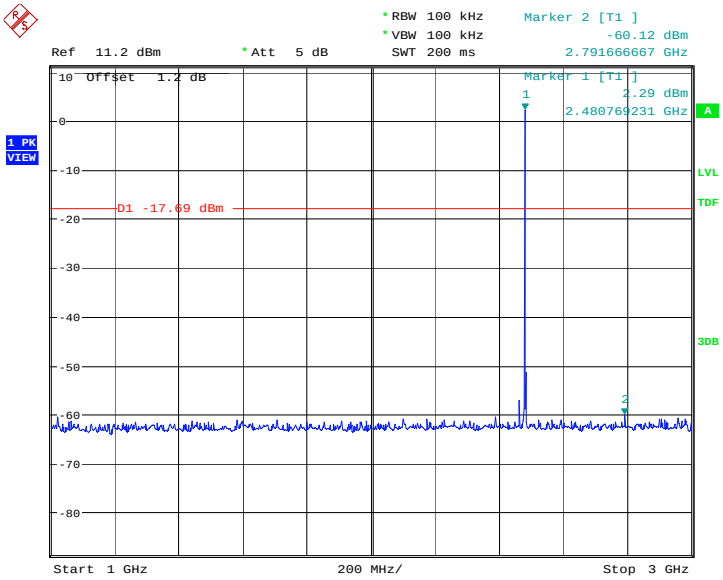

Date: 8.APR.2013 09:28:40

Fig.25. Conducted spurious emission: GFSK, Channel 78, 1GHz - 3GHz

©Copyright. All rights reserved by TMC Beijing.

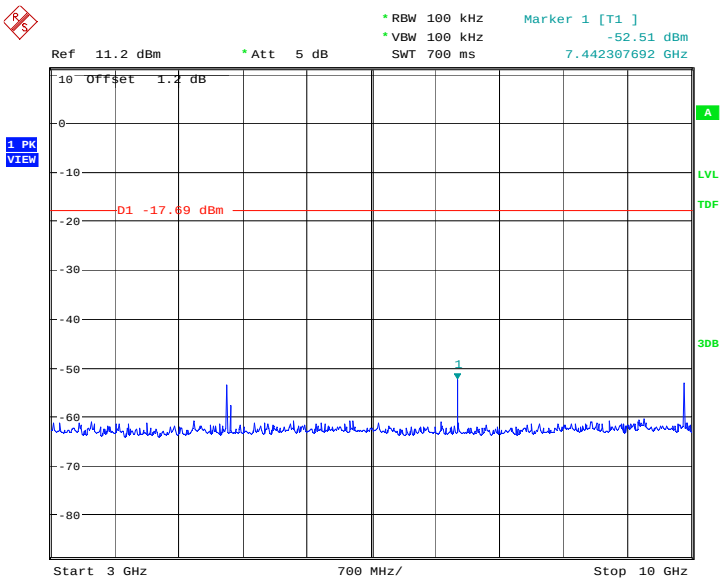

Date: 8.APR.2013 09:28:56

Fig.26. Conducted spurious emission: GFSK, Channel 78, 3GHz - 10GHz

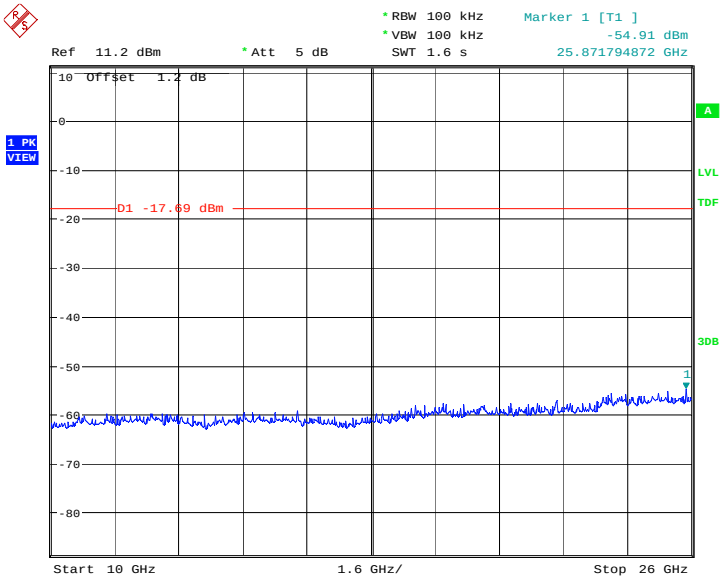

Date: 8.APR.2013 09:29:13

Fig.27. Conducted spurious emission: GFSK, Channel 78, 10GHz - 26GHz

©Copyright. All rights reserved by TMC Beijing.

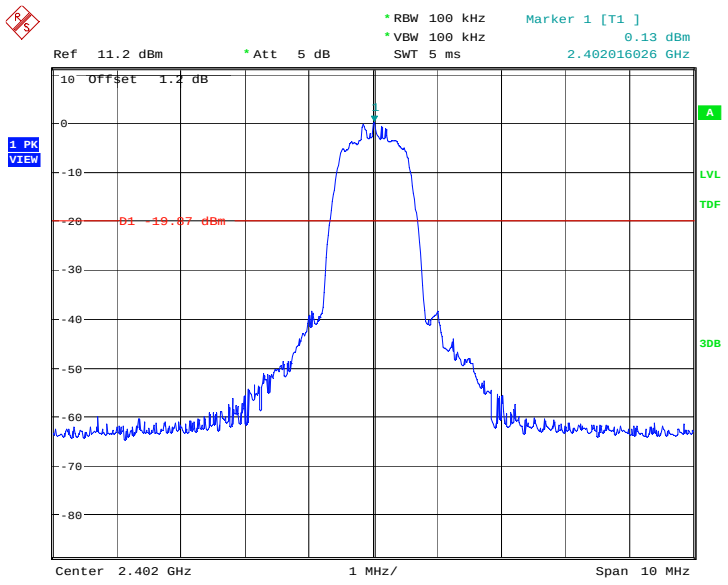

Date: 8.APR.2013 09:46:02

Fig.28. Conducted spurious emission: π/4 DQPSK, Channel 0,2402MHz

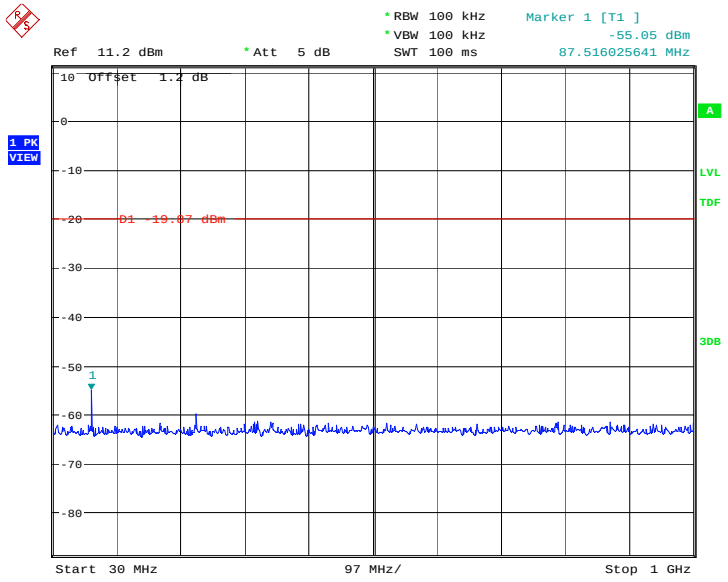

Date: 8.APR.2013 09:46:19

Fig.29. Conducted spurious emission: π/4 DQPSK, Channel 0, 30MHz - 1GHz

©Copyright. All rights reserved by TMC Beijing.

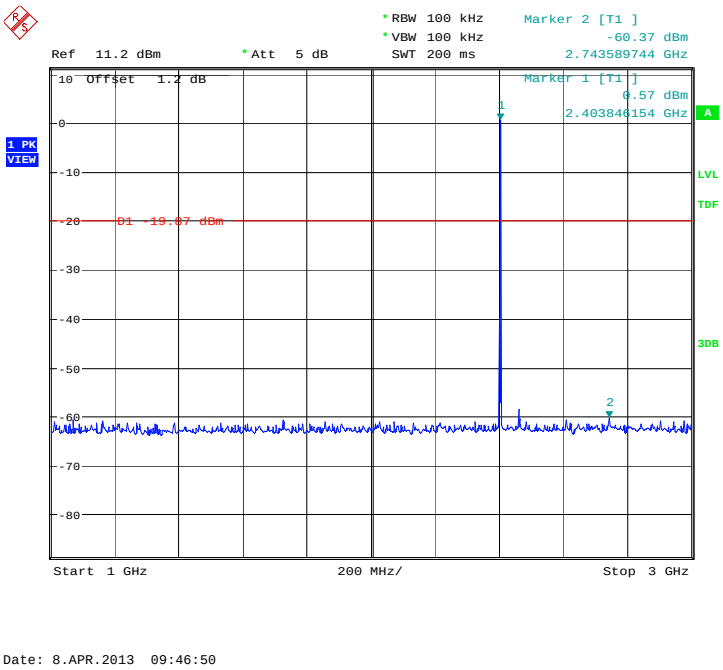

Fig.30. Conducted spurious emission: π/4 DQPSK, Channel 0, 1GHz - 3GHz

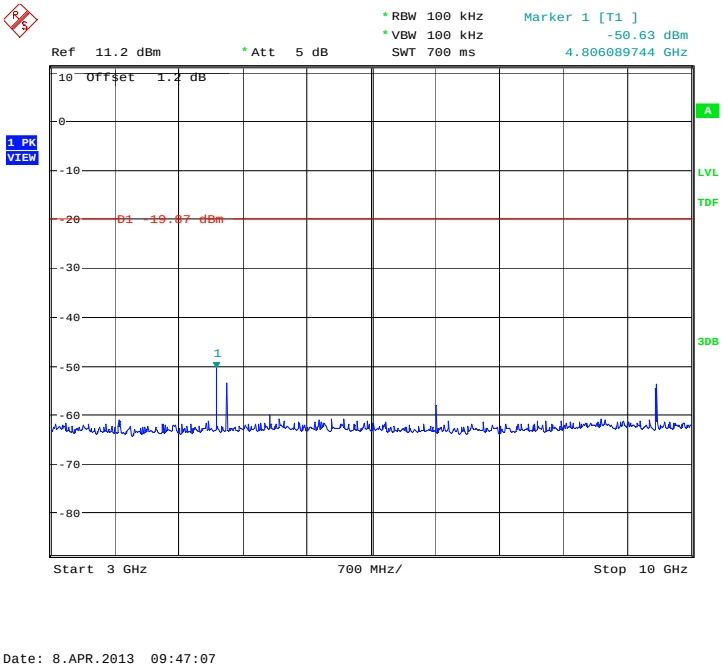

Fig.31. Conducted spurious emission: π/4 DQPSK, Channel 0, 3GHz - 10GHz

©Copyright. All rights reserved by TMC Beijing.

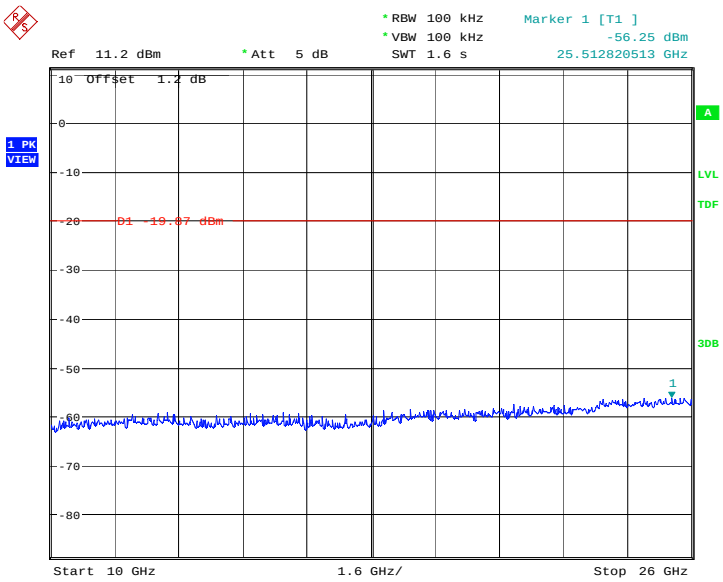

Date: 8.APR.2013 09:47:24

Fig.32. Conducted spurious emission: π/4 DQPSK, Channel 0,10GHz - 26GHz

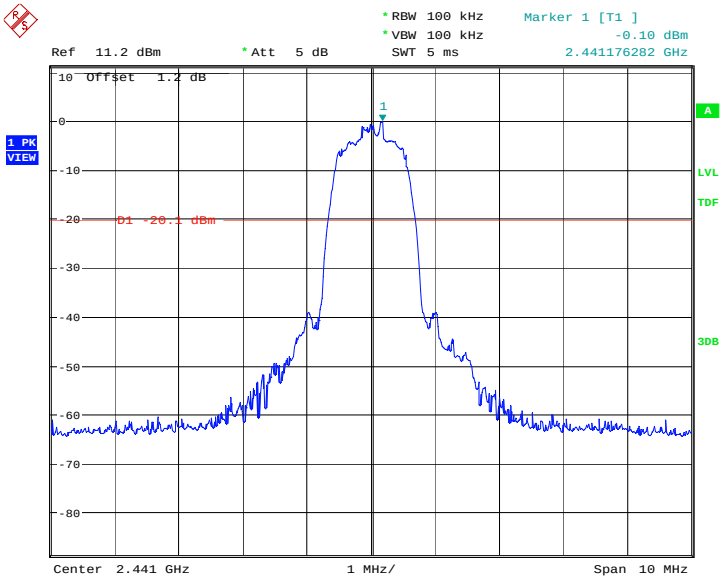

Date: 8.APR.2013 09:47:40

Fig.33. Conducted spurious emission: π/4 DQPSK, Channel 39, 2441MHz

©Copyright. All rights reserved by TMC Beijing.

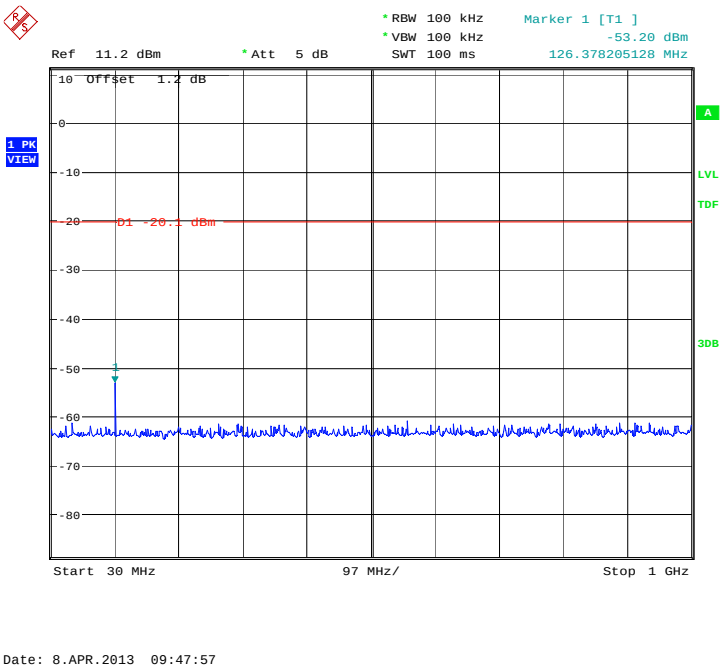

Fig.34. Conducted spurious emission: π/4 DQPSK, Channel 39, 30MHz - 1GHz

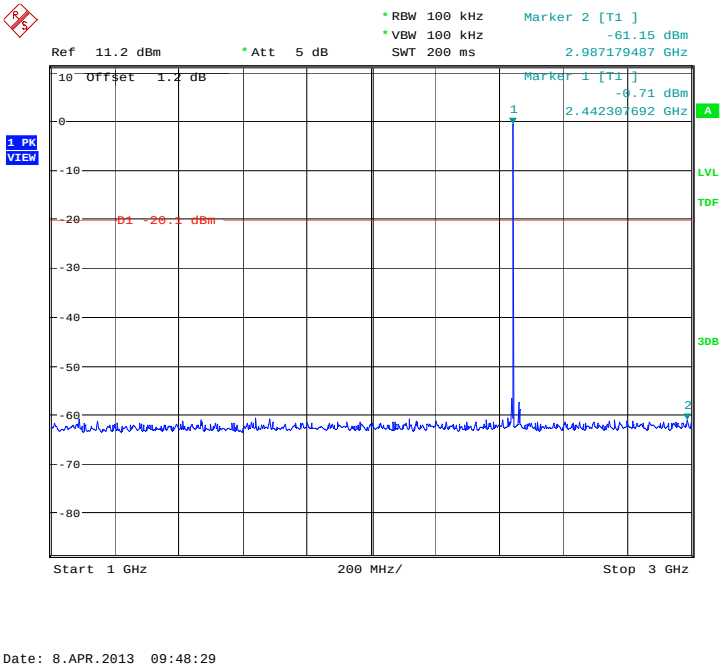

Fig.35. Conducted spurious emission: π/4 DQPSK, Channel 39, 1GHz - 3GHz

©Copyright. All rights reserved by TMC Beijing.

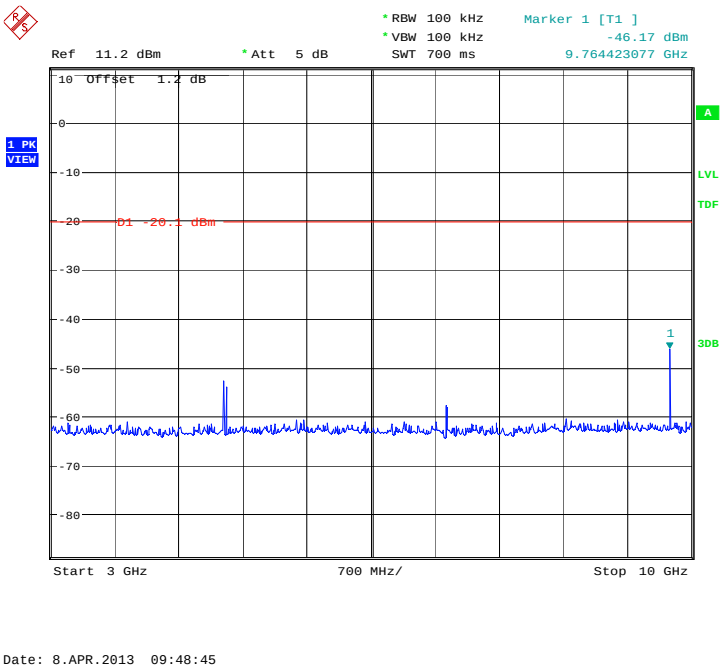

Fig.36. Conducted spurious emission: π/4 DQPSK, Channel 39, 3GHz - 10GHz

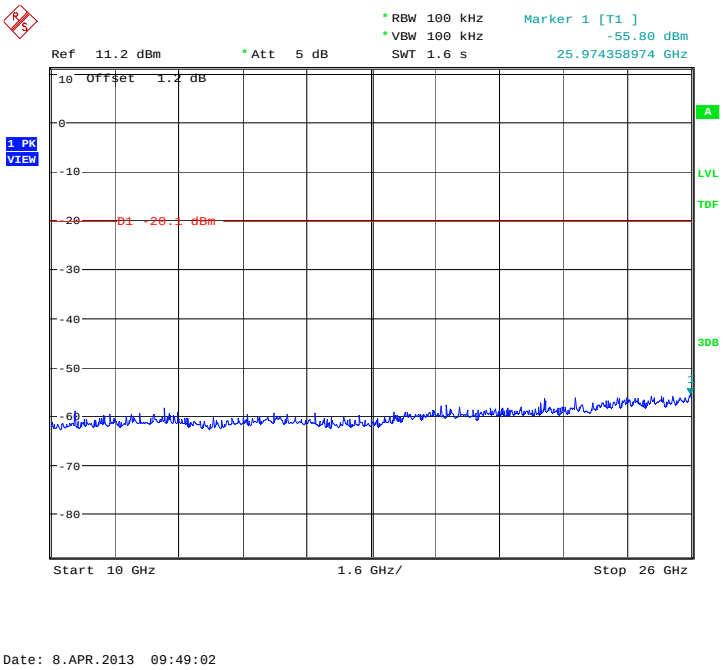

Fig.37. Conducted spurious emission: π/4 DQPSK, Channel 39, 10GHz – 26GHz

©Copyright. All rights reserved by TMC Beijing.

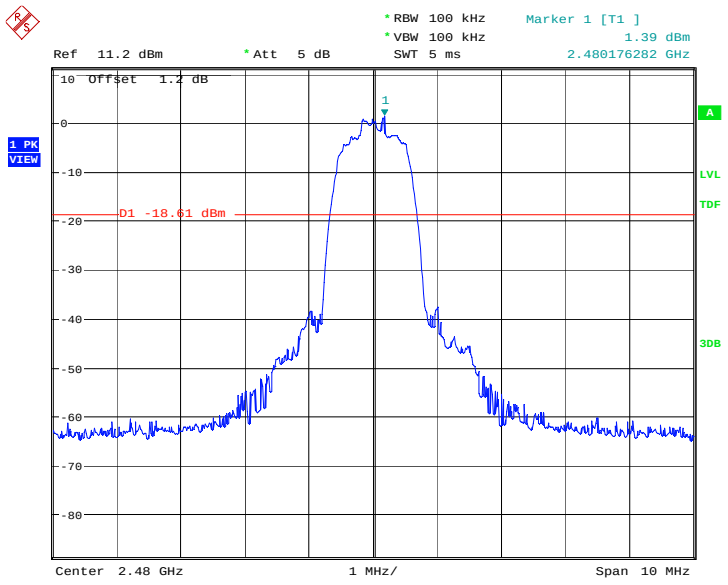

Date: 8.APR.2013 09:49:18

Fig.38. Conducted spurious emission: π/4 DQPSK, Channel 78, 2480MHz

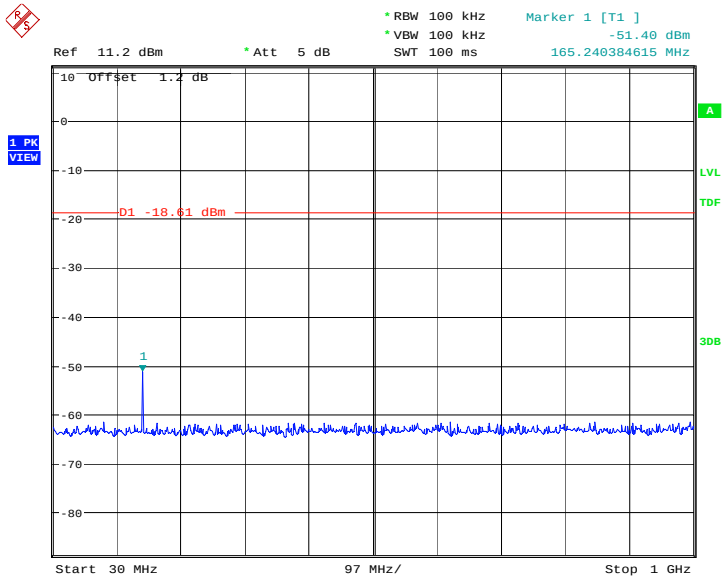

Date: 8.APR.2013 09:49:35

Fig.39. Conducted spurious emission: π/4 DQPSK, Channel 78, 30MHz - 1GHz

©Copyright. All rights reserved by TMC Beijing.

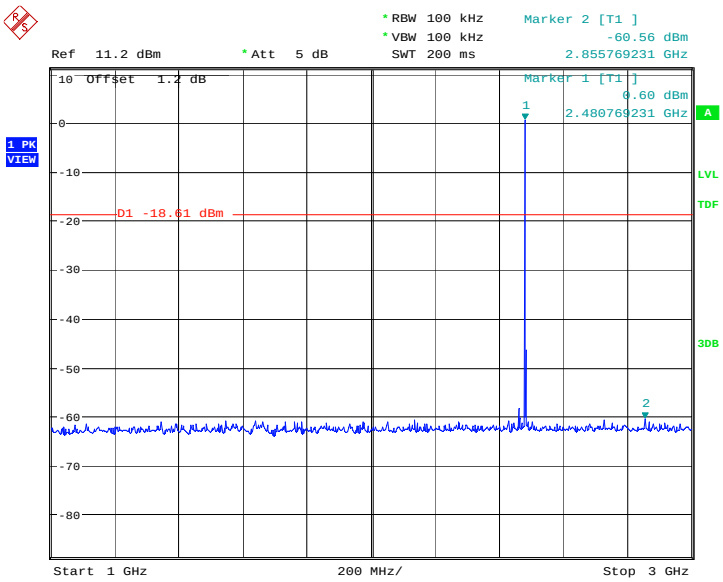

Date: 8.APR.2013 09:50:07

Fig.40. Conducted spurious emission: π/4 DQPSK, Channel 78, 1GHz - 3GHz

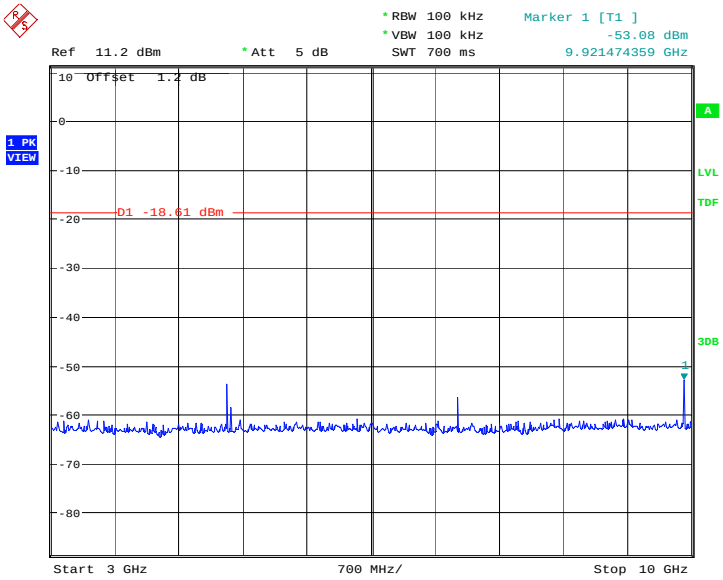

Date: 8.APR.2013 09:50:23

Fig.41. Conducted spurious emission: π/4 DQPSK, Channel 78, 3GHz - 10GHz

©Copyright. All rights reserved by TMC Beijing.

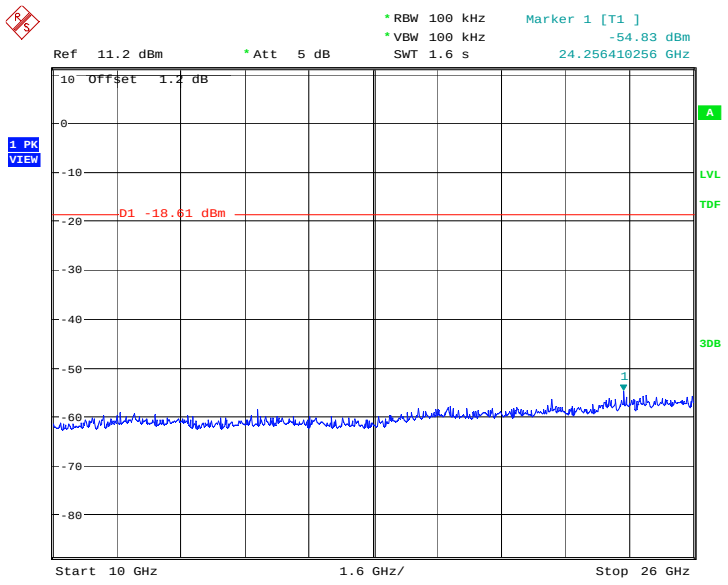

Fig.42. Fig.30 Conducted spurious emission: π/4 DQPSK, Channel 78, 10GHz - 26GHz

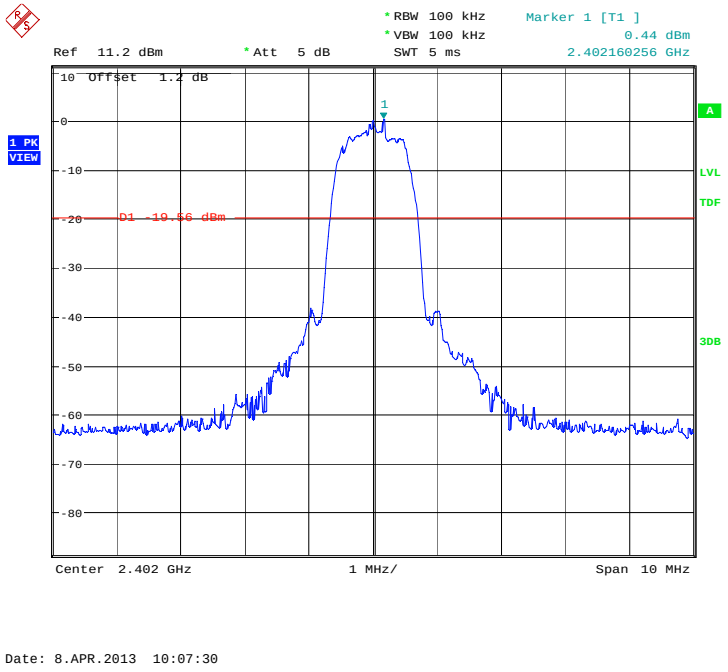

Fig.43. Conducted spurious emission: 8DPSK, Channel 0,2402MHz

©Copyright. All rights reserved by TMC Beijing.

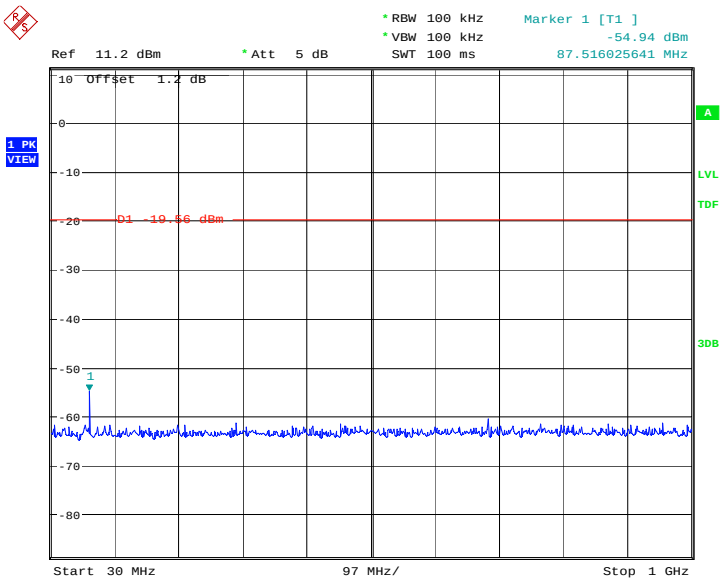

Fig.44. Conducted spurious emission: 8DPSK, Channel 0, 30MHz - 1GHz

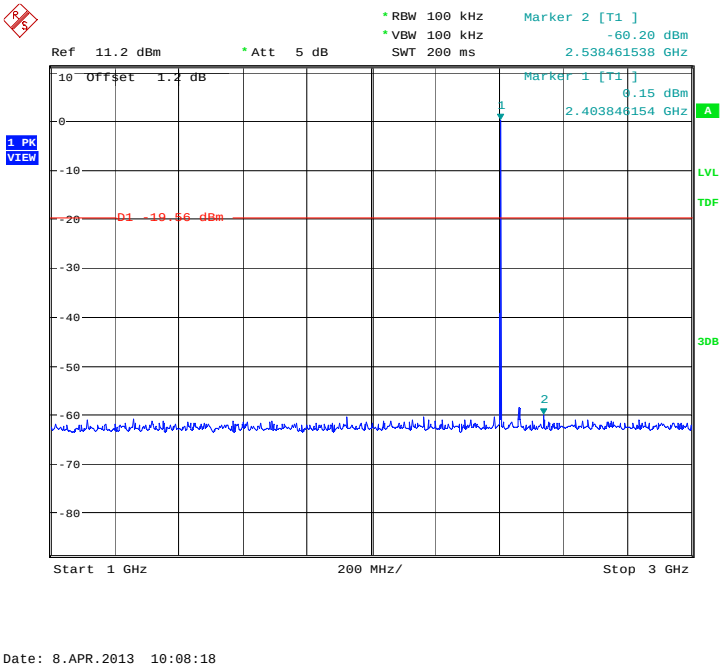

Fig.45. Conducted spurious emission: 8DPSK, Channel 0, 1GHz - 3GHz

©Copyright. All rights reserved by TMC Beijing.

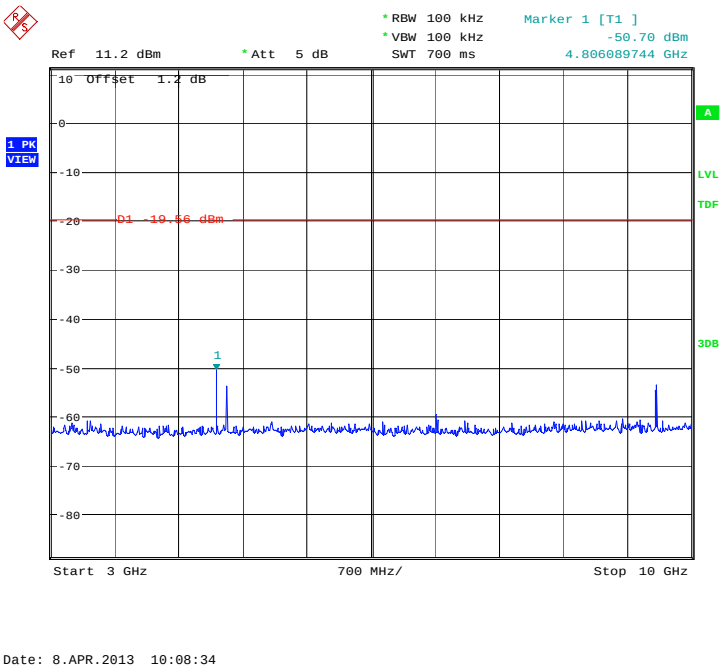

Fig.46. Conducted spurious emission: 8DPSK, Channel 0, 3GHz - 10GHz

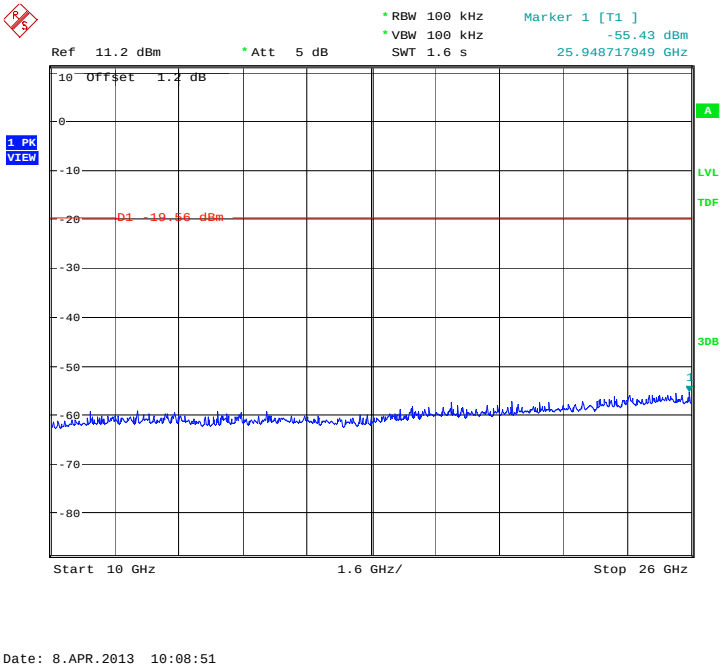

Fig.47. Conducted spurious emission: 8DPSK, Channel 0,10GHz - 26GHz

©Copyright. All rights reserved by TMC Beijing.

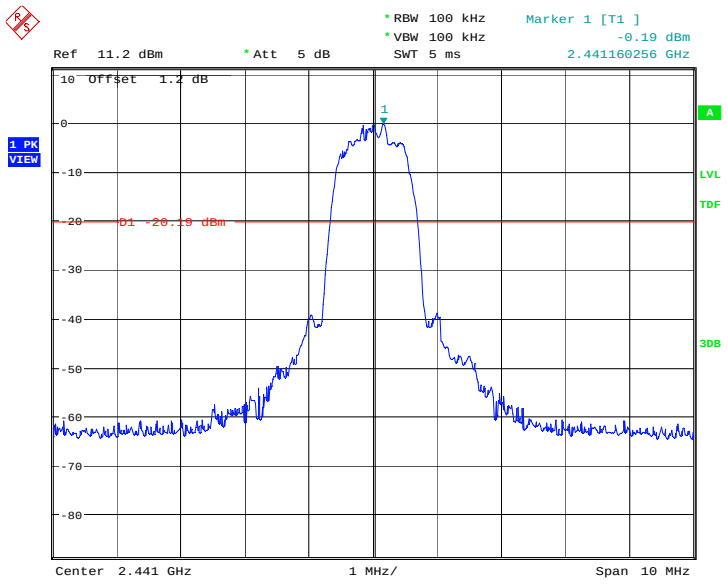

Date: 8.APR.2013 10:09:07

Fig.48. Conducted spurious emission: 8DPSK, Channel 39, 2441MHz

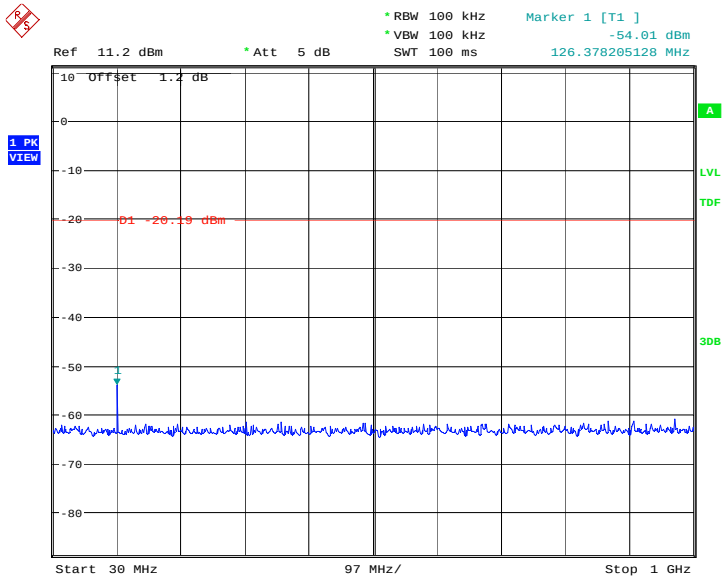

Date: 8.APR.2013 10:09:24

Fig.49. Conducted spurious emission: 8DPSK, Channel 39, 30MHz - 1GHz

©Copyright. All rights reserved by TMC Beijing.

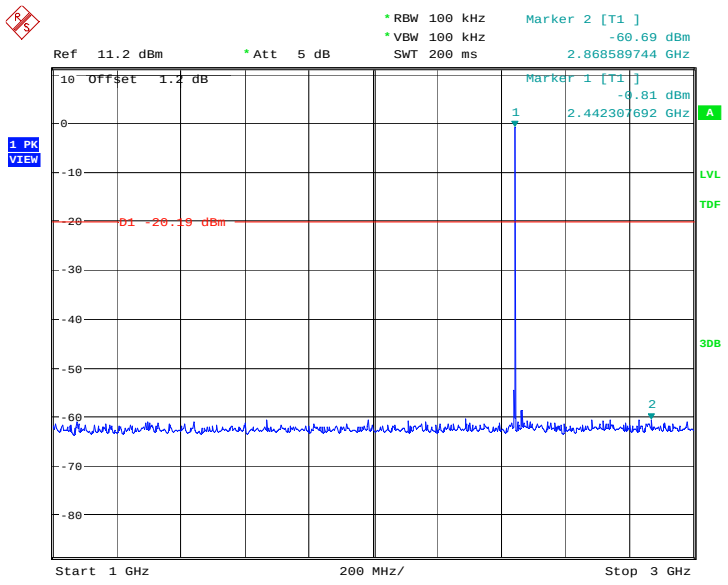

Date: 8.APR.2013 10:09:56

Fig.50. Conducted spurious emission: 8DPSK, Channel 39, 1GHz - 3GHz

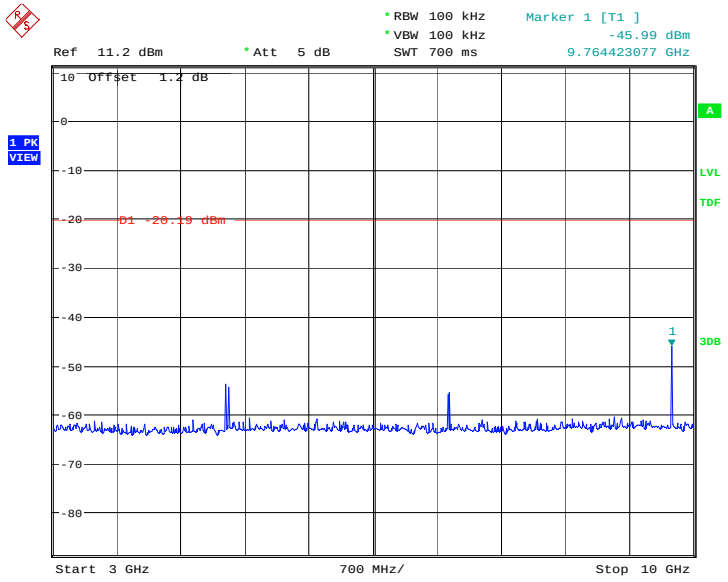

Date: 8.APR.2013 10:10:12

Fig.51. Conducted spurious emission: 8DPSK, Channel 39, 3GHz - 10GHz

©Copyright. All rights reserved by TMC Beijing.

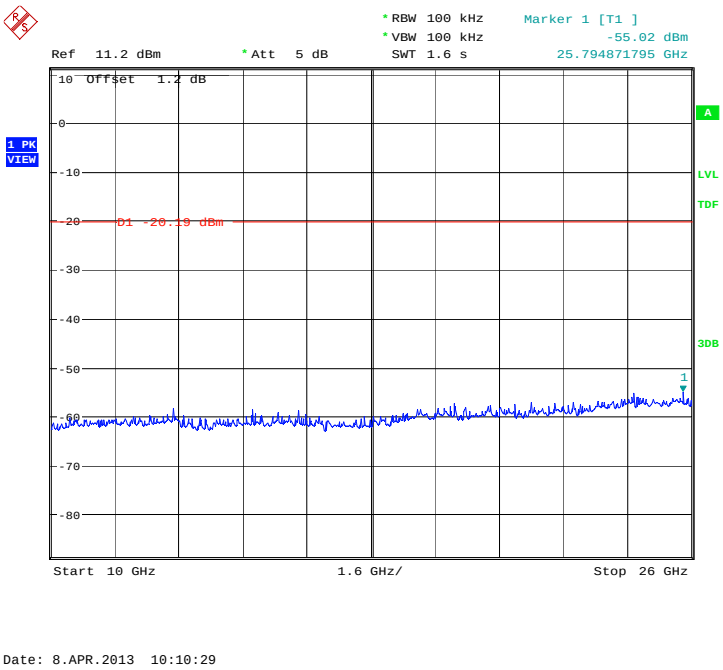

Fig.52. Conducted spurious emission: 8DPSK, Channel 39, 10GHz – 26GHz

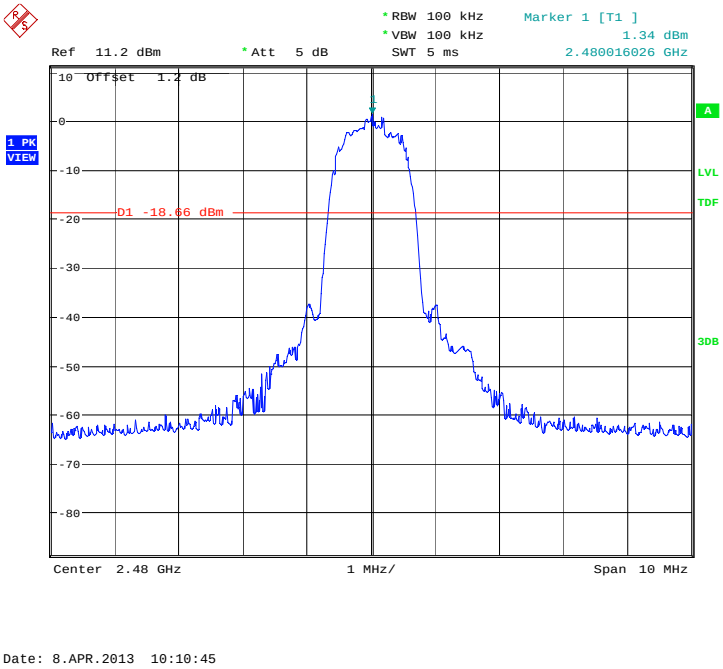

Fig.53. Conducted spurious emission: 8DPSK, Channel 78, 2480MHz

©Copyright. All rights reserved by TMC Beijing.

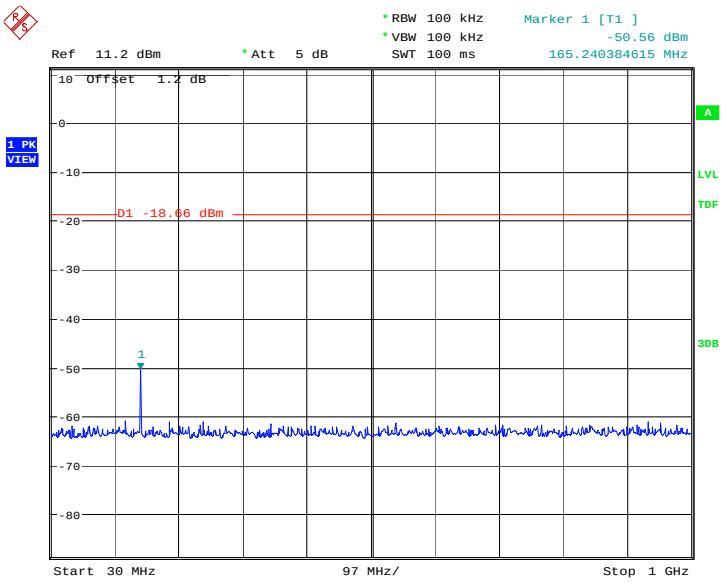

Date: 8.APR.2013 10:11:02

Fig.54. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

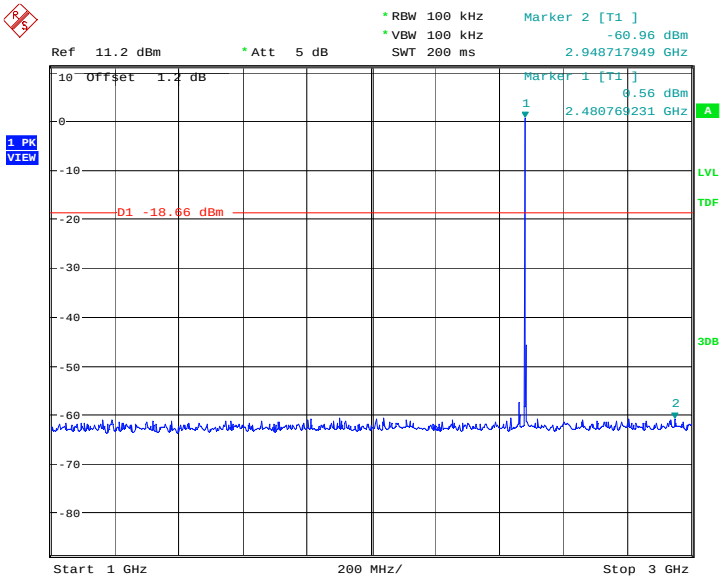

Date: 8.APR.2013 10:11:34

Fig.55. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

©Copyright. All rights reserved by TMC Beijing.

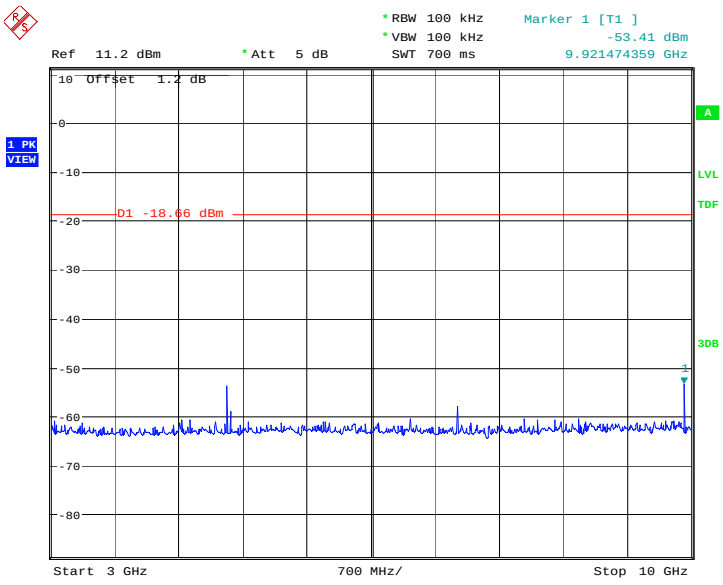

Date: 8.APR.2013 10:11:50

Fig.56. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

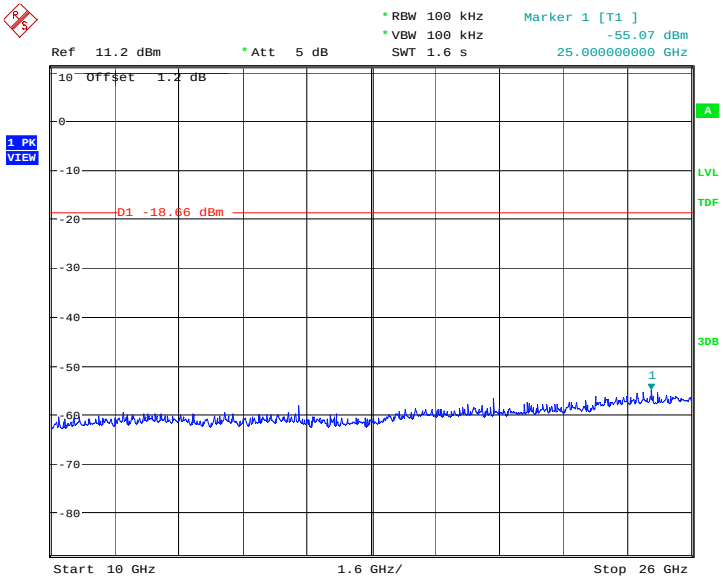

Date: 8.APR.2013 10:12:07

Fig.57. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

©Copyright. All rights reserved by TMC Beijing.

A.5. Radiated Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	Listed as follows
RSS-210 A8.5	

Frequency (MHz) Field strength	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
0.009-30	100KHz/300KHz	5
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

©Copyright. All rights reserved by TMC Beijing.

Measurement Results:

A "reference path loss" is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable los.

The measurement results are obtained as described below:

Result=P_{Mea}+A_{Rpl}

For GFSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	30 MHz ~ 1 GHz	Fig.58	P
	1 GHz ~ 3 GHz	Fig.59	P
	3 GHz ~ 18 GHz	Fig.60	P
Ch 39 2441 MHz	30 MHz ~ 1 GHz	Fig.61	P
	1 GHz ~ 3 GHz	Fig.62	P
	3 GHz ~ 18 GHz	Fig.63	P
Ch 78 2480 MHz	30 MHz ~ 1 GHz	Fig.64	P
	1 GHz ~ 3 GHz	Fig.65	P
	3 GHz ~ 18 GHz	Fig.66	P
Power	2.38GHz~2.4GHz---L	Fig.67	P
Power	2.45GHz~2.5GHz---H	Fig.68	P
For all channels	18 GHz ~ 26 GHz	Fig.69	P

Forπ/4 DQPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	30 MHz ~ 1 GHz	Fig.70	P
	1 GHz ~ 3 GHz	Fig.71	P
	3 GHz ~ 18 GHz	Fig.72	P
Ch 39 2441 MHz	30 MHz ~ 1 GHz	Fig.73	P
	1 GHz ~ 3 GHz	Fig.74	P
	3 GHz ~ 18 GHz	Fig.75	P
Ch 78 2480 MHz	30 MHz ~ 1 GHz	Fig.76	P
	1 GHz ~ 3 GHz	Fig.77	P
	3 GHz ~ 18 GHz	Fig.78	P
Power	2.38GHz~2.4GHz---L	Fig.79	P
Power	2.45GHz~2.5GHz---H	Fig.80	P
For all channels	18 GHz ~ 26 GHz	Fig.81	P

For 8DPSK

Channel	Frequency Range	Test Results	Conclusion
Ch 0 2402 MHz	30 MHz ~ 1 GHz	Fig.82	P
	1 GHz ~ 3 GHz	Fig.83	P
	3 GHz ~ 18 GHz	Fig.84	P

©Copyright. All rights reserved by TMC Beijing.

Ch 39 2441 MHz	30 MHz ~ 1 GHz	Fig.85	P
	1 GHz ~ 3 GHz	Fig.86	P
	3 GHz ~ 18 GHz	Fig.87	P
Ch 78 2480 MHz	30 MHz ~ 1 GHz	Fig.88	P
	1 GHz ~ 3 GHz	Fig.89	P
	3 GHz ~ 18 GHz	Fig.90	P
Power	2.38GHz~2.4GHz---L	Fig.91	P
Power	2.45GHz~2.5GHz---H	Fig.92	P
For all channels	18 GHz ~ 26 GHz	Fig.93	P

Note: Only worst case result is given.

Test graphs as below:

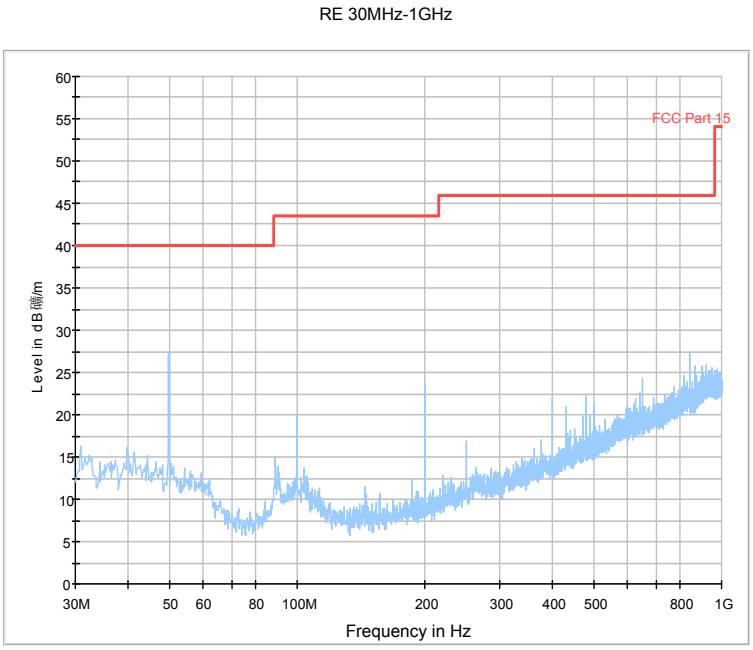

Fig.58. Radiated emission: GFSK, Channel 0, 30 MHz - 1 GHz

©Copyright. All rights reserved by TMC Beijing.

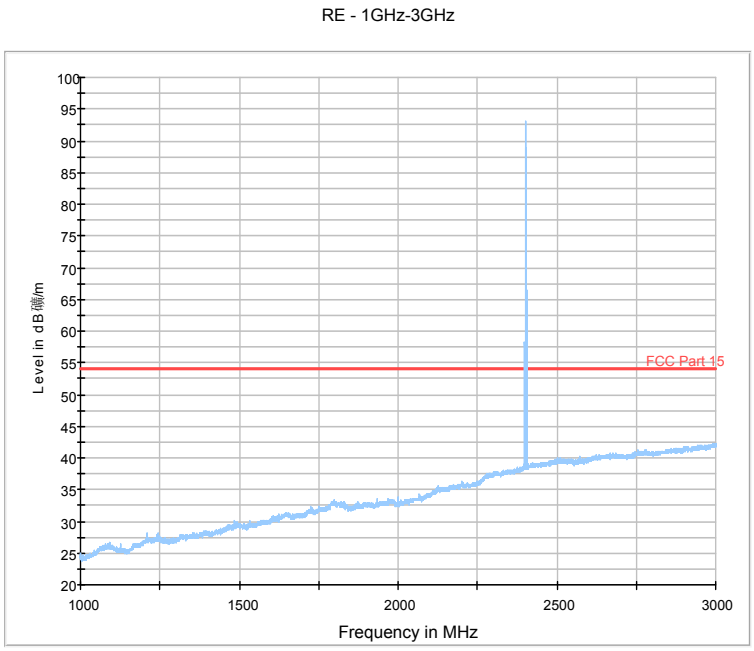

Fig.59. Radiated emission: GFSK, Channel 0, 1 GHz - 3 GHz

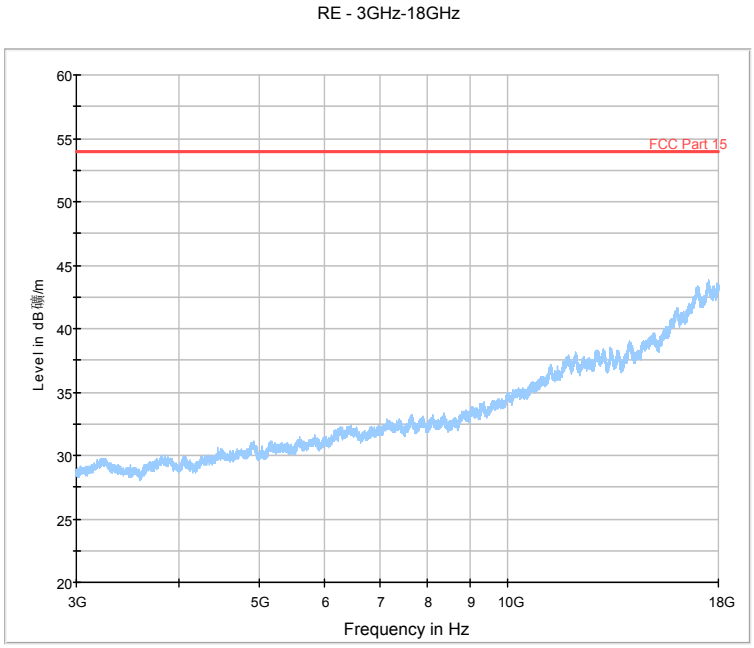

Fig.60. Radiated emission: GFSK, Channel 0, 3 GHz - 18 GHz

©Copyright. All rights reserved by TMC Beijing.

RE 30MHz-1GHz

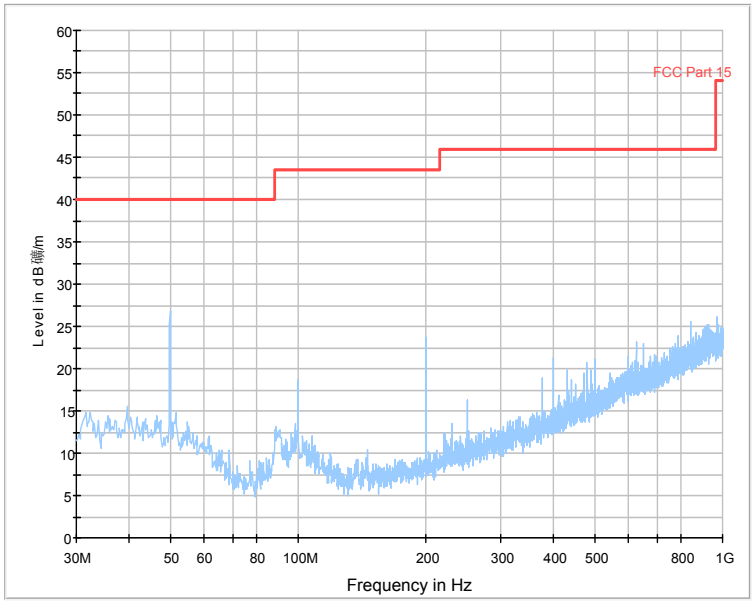

Fig.61. Radiated emission: GFSK, Channel 39, 30 MHz - 1 GHz

RE - 1GHz-3GHz

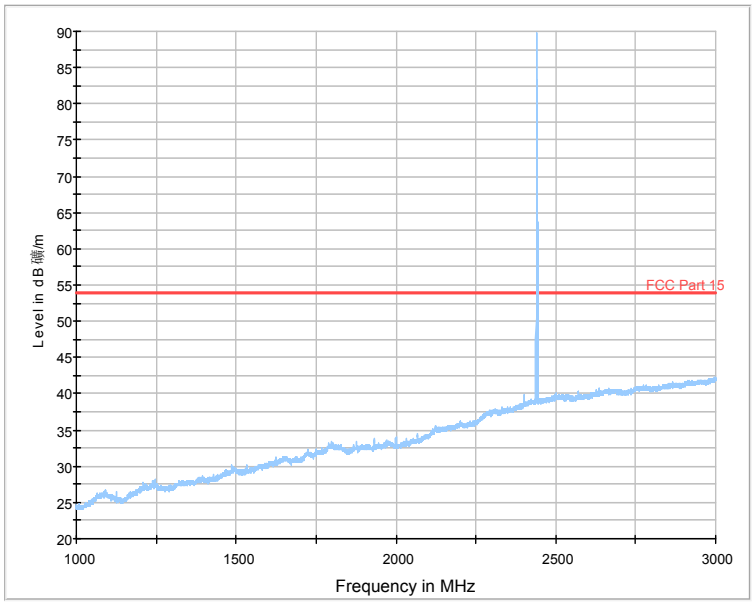

Fig.62. Radiated emission: GFSK, Channel 39, 1 GHz - 3 GHz

©Copyright. All rights reserved by TMC Beijing.

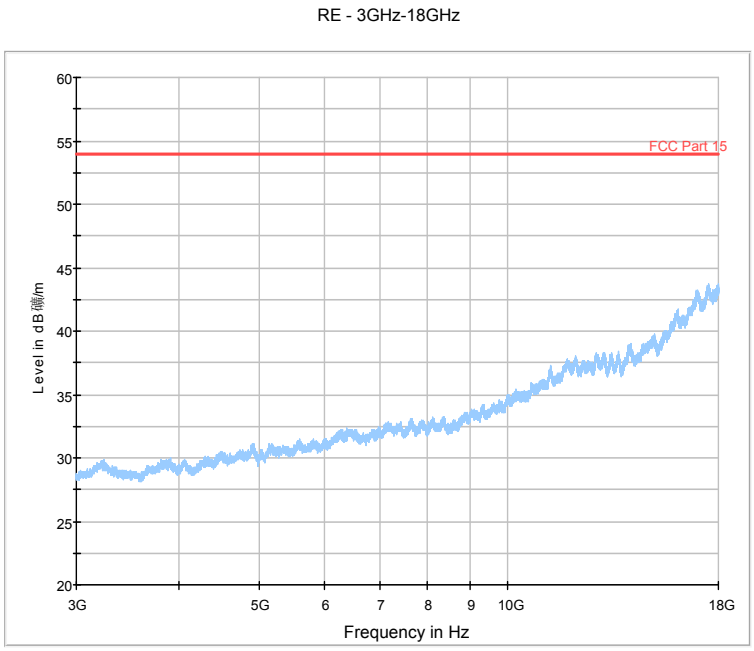

Fig.63. Radiated emission: GFSK, Channel 39, 3 GHz - 18 GHz

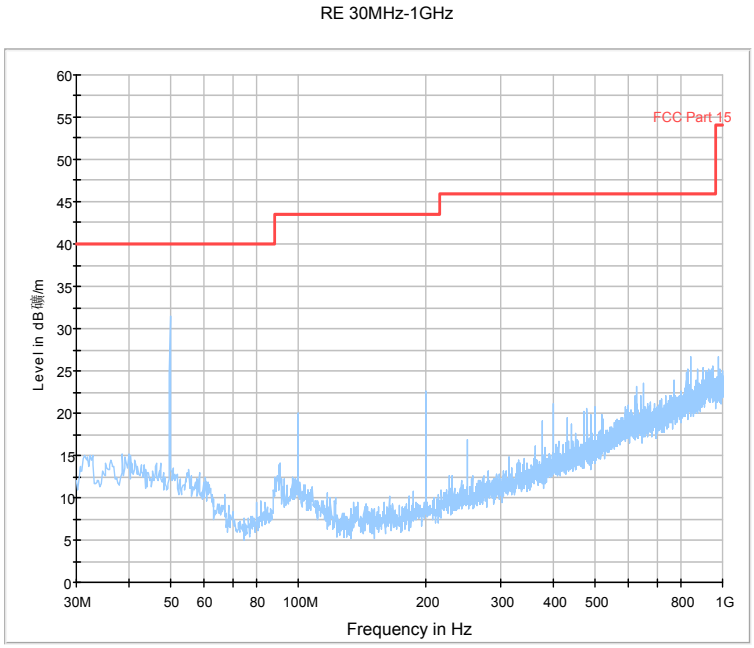

Fig.64. Radiated emission: GFSK, Channel 78, 30 MHz - 1 GHz

©Copyright. All rights reserved by TMC Beijing.

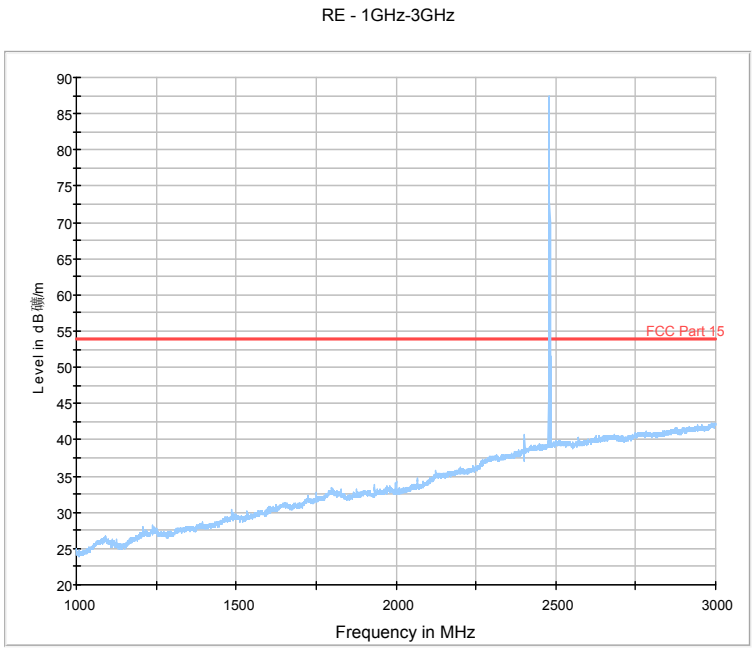

Fig.65. Fig.47 Radiated emission: GFSK, Channel 78, 1 GHz - 3 GHz

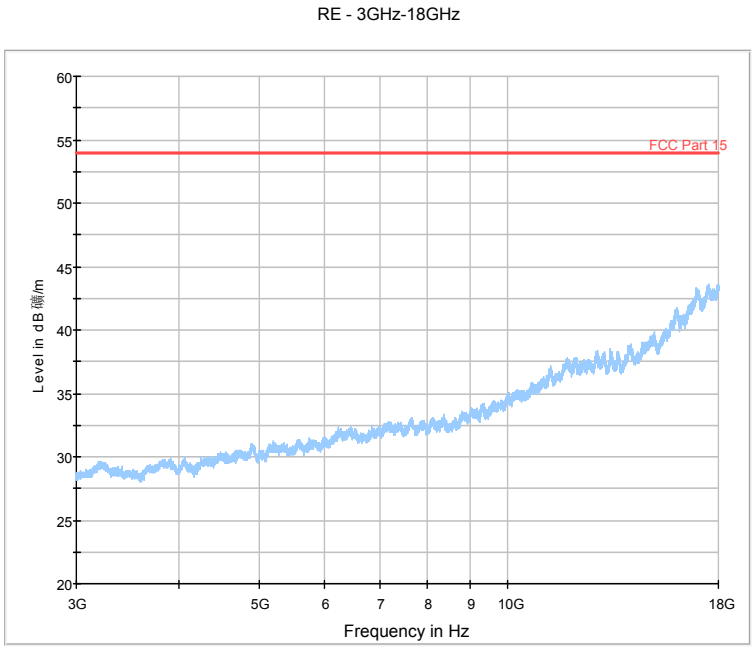

Fig.66. Radiated emission: GFSK, Channel 78, 3 GHz - 18 GHz

©Copyright. All rights reserved by TMC Beijing.

RE - Power-2.38GHz-2.45GHz

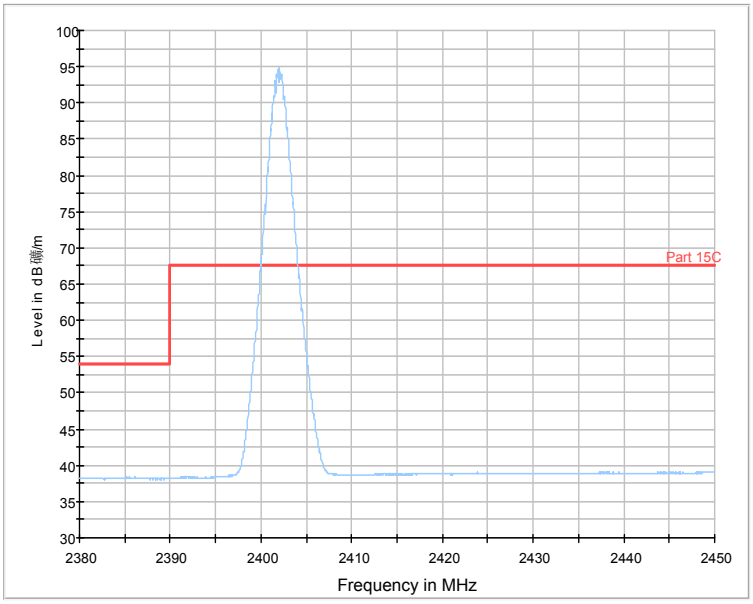

Fig.67. Radiated emission (Power): GFSK, low channel

RE - Power-2.45GHz-2.5GHz

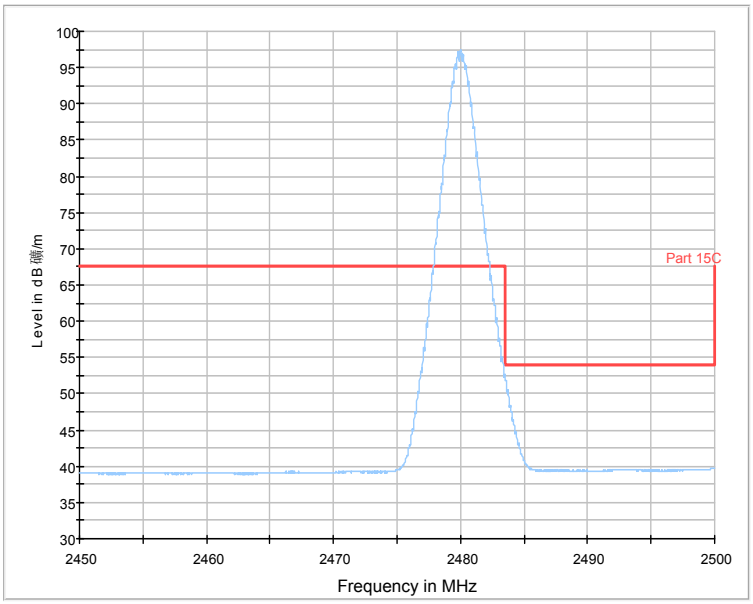

Fig.68. Radiated emission (Power) GFSK, high channel

©Copyright. All rights reserved by TMC Beijing.

EMI 18GHz-26.5GHz

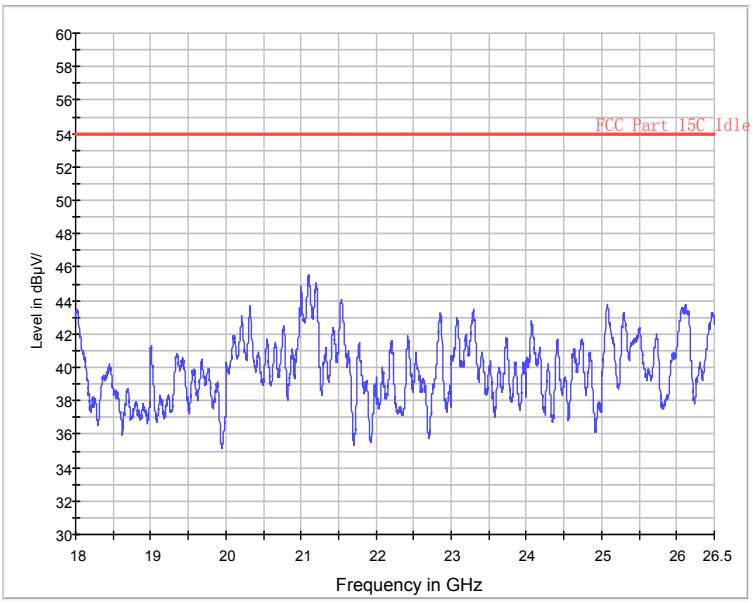

Fig.69. Radiated emission: GFSK, 18 GHz - 26 GHz

RE 30MHz-1GHz

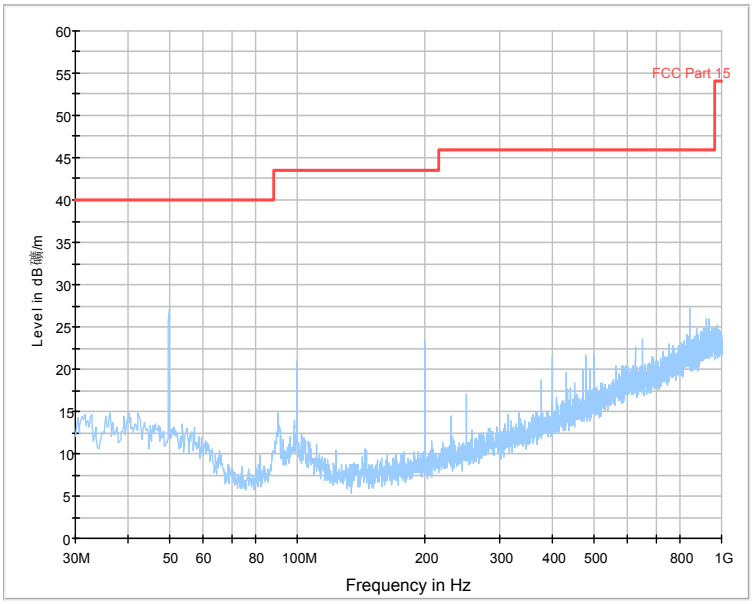

Fig.70. Radiated emission: π/4 DQPSK, Channel 0, 30 MHz - 1 GHz

©Copyright. All rights reserved by TMC Beijing.

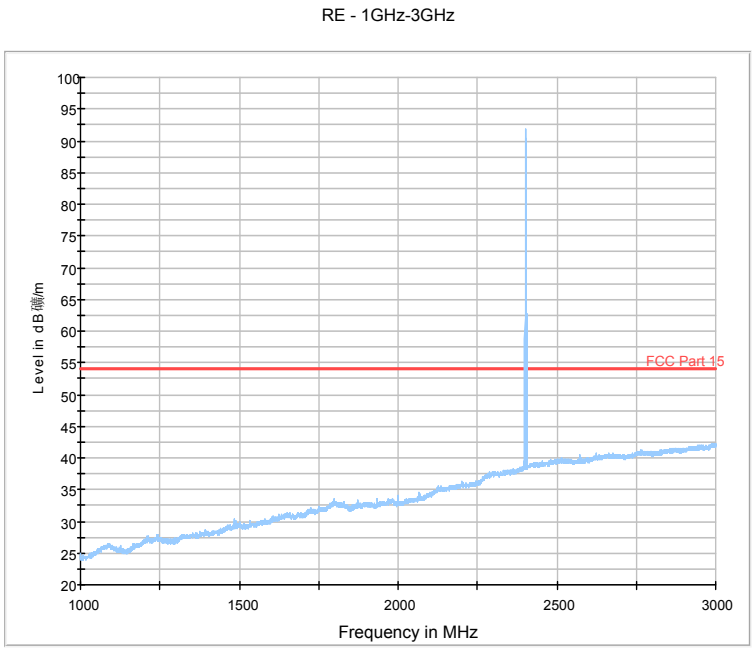

Fig.71. Radiated emission: π/4 DQPSK, Channel 0, 1 GHz - 3 GHz

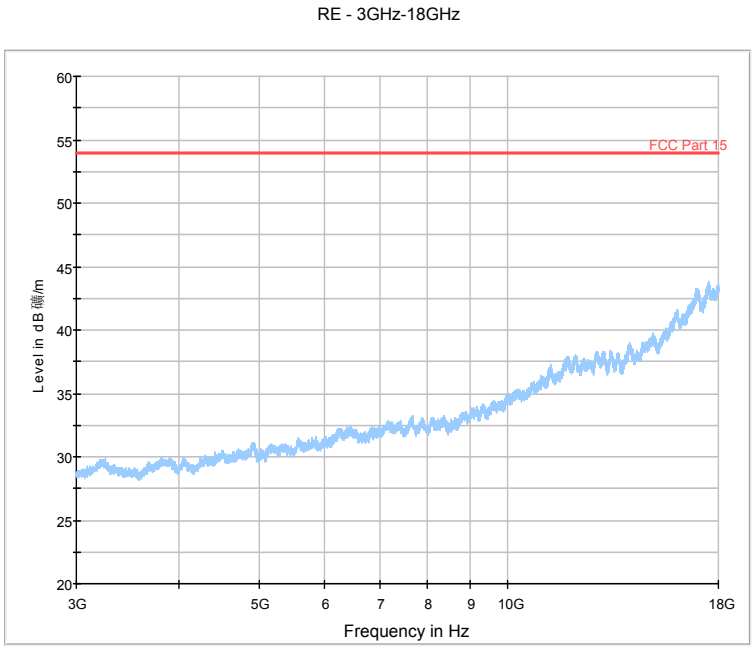

Fig.72. Radiated emission: π/4 DQPSK, Channel 0, 3 GHz - 18 GHz

©Copyright. All rights reserved by TMC Beijing.

RE 30MHz-1GHz

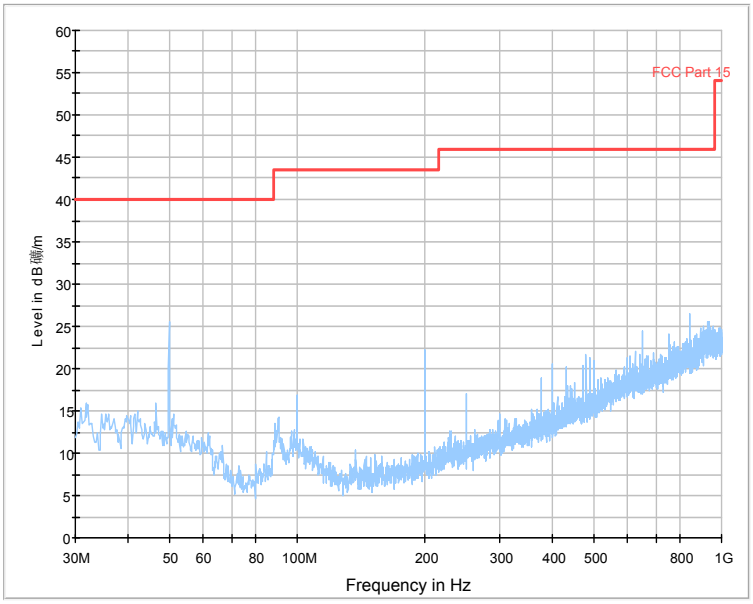

Fig.73. Radiated emission: π/4 DQPSK, Channel 39, 30 MHz - 1 GHz

RE - 1GHz-3GHz

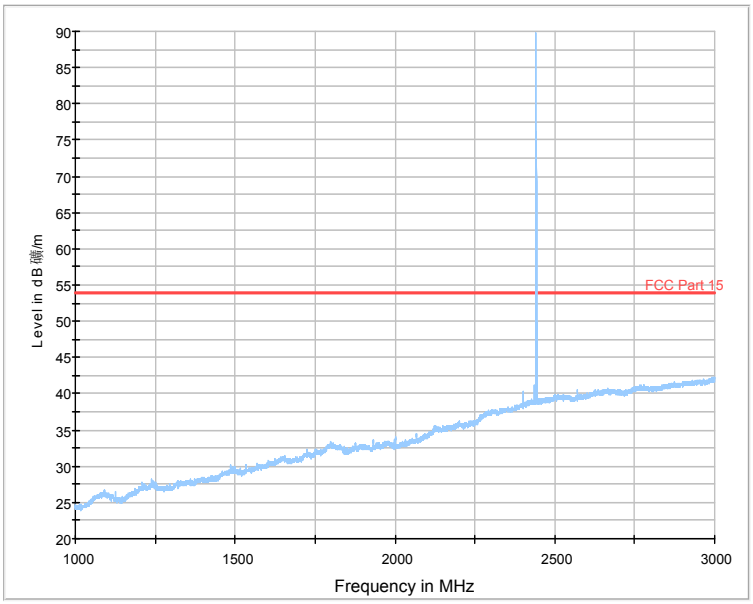

Fig.74. Radiated emission: π/4 DQPSK, Channel 39, 1 GHz - 3 GHz

©Copyright. All rights reserved by TMC Beijing.

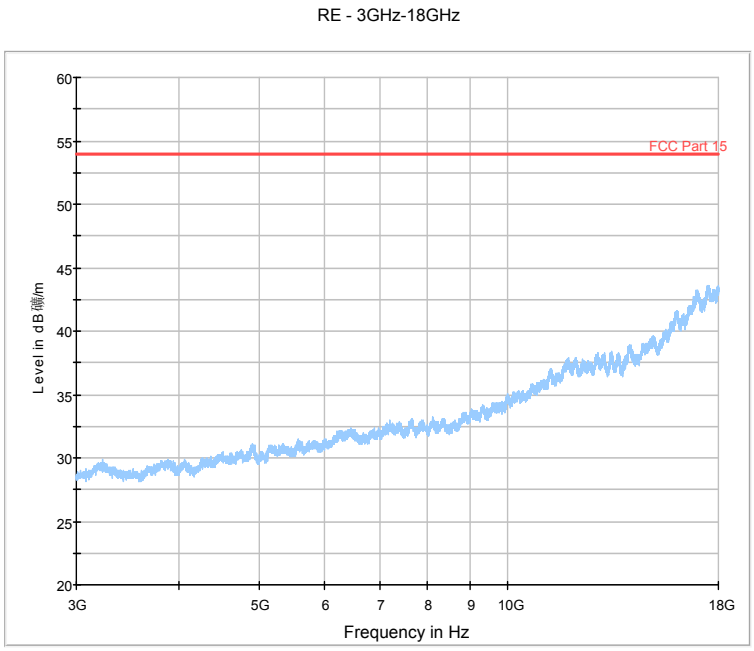

Fig.75. Radiated emission: π/4 DQPSK, Channel 39, 3 GHz - 18 GHz

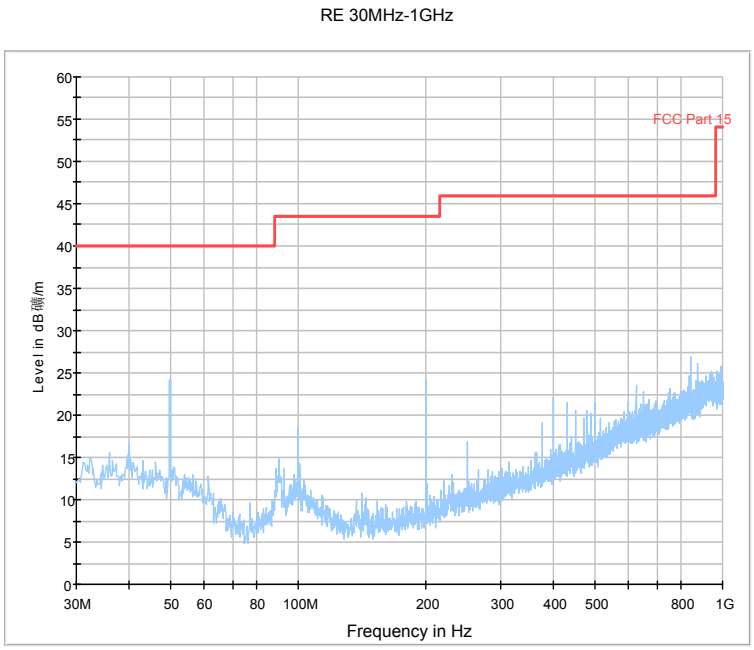

Fig.76. Radiated emission: π/4 DQPSK, Channel 78, 30 MHz - 1 GHz

©Copyright. All rights reserved by TMC Beijing.

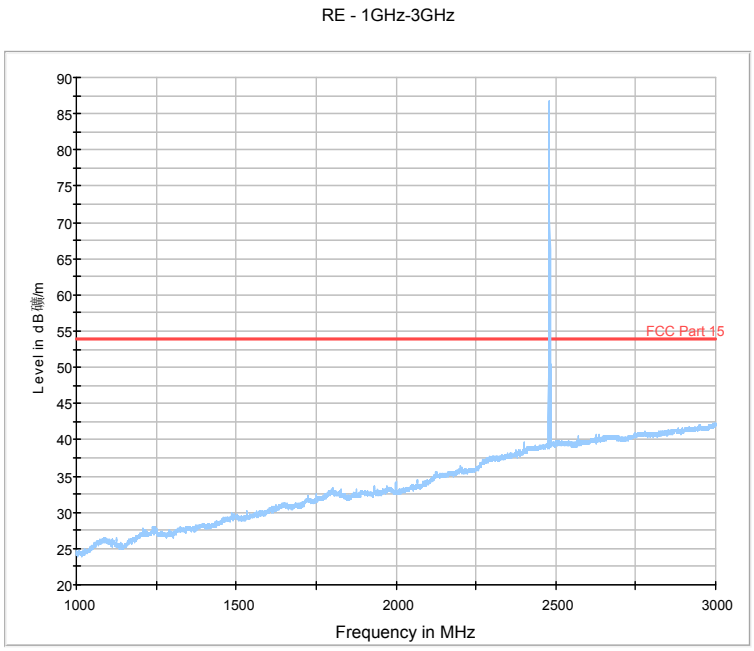

Fig.77. Radiated emission: π/4 DQPSK, Channel 78, 1 GHz - 3 GHz

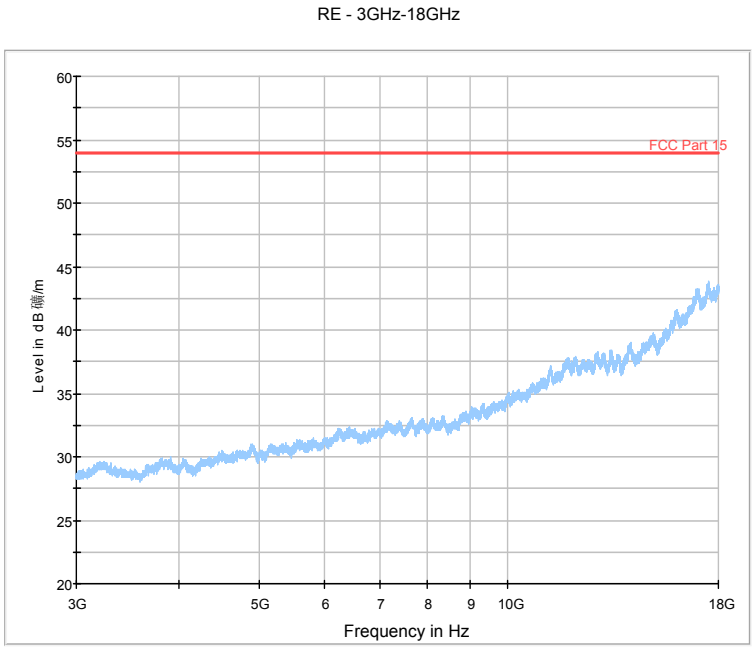

Fig.78. Radiated emission: π/4 DQPSK, Channel 78, 3 GHz - 18 GHz

©Copyright. All rights reserved by TMC Beijing.

RE - Power-2.38GHz-2.45GHz

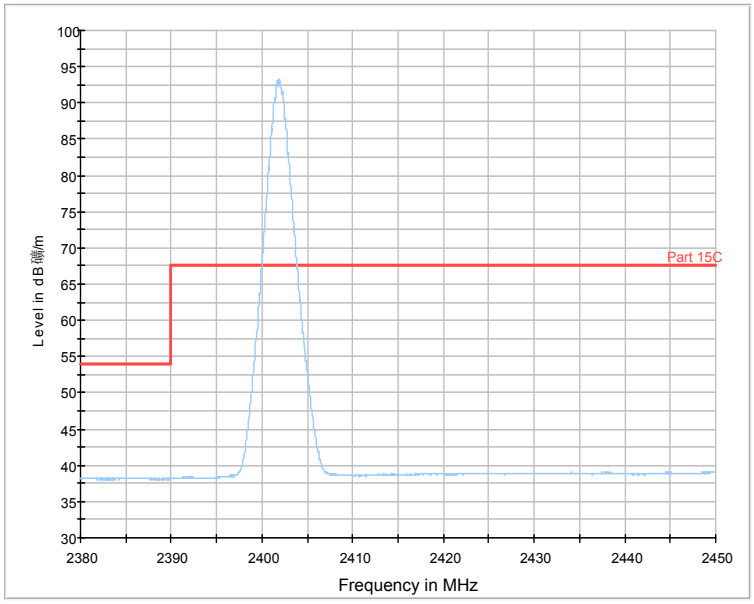

Fig.79. Radiated emission (Power): π/4 DQPSK, low channel

RE - Power-2.45GHz-2.5GHz

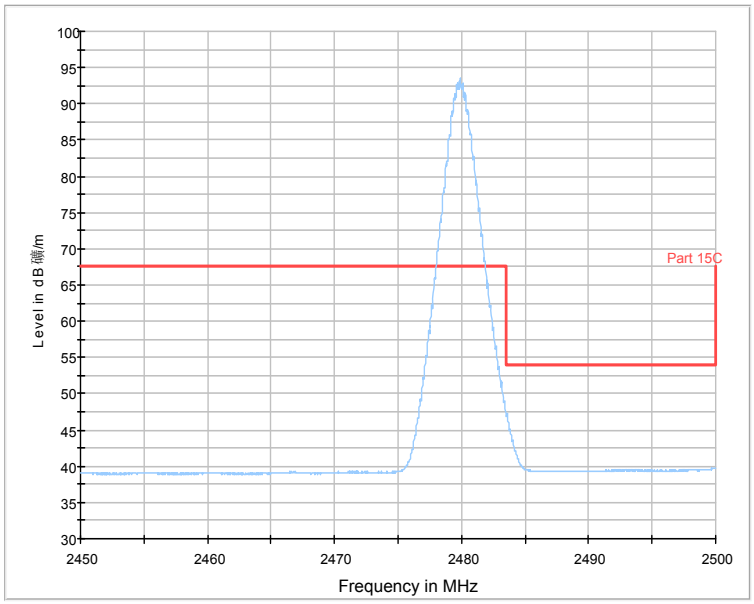

Fig.80. Radiated emission (Power): π/4 DQPSK, high channel

©Copyright. All rights reserved by TMC Beijing.

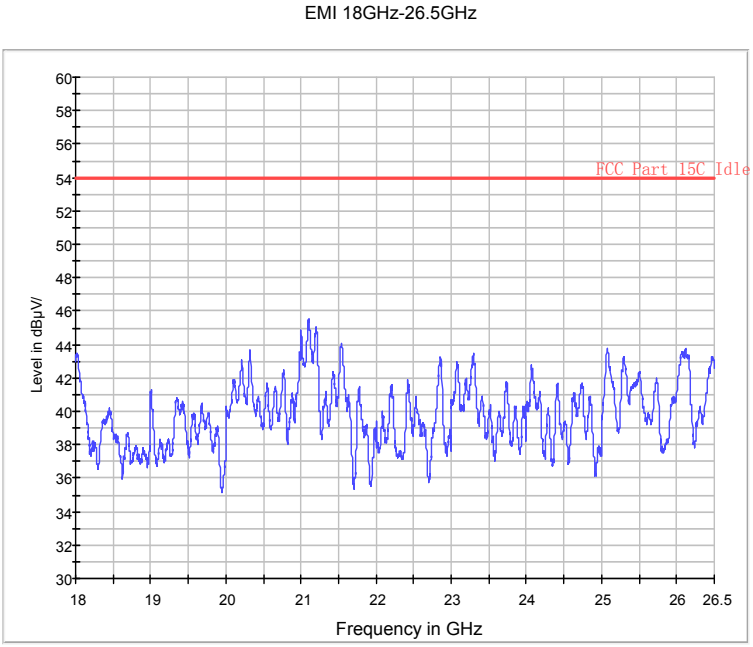

Fig.81. Radiated emission: π/4 DQPSK, 18 GHz - 26 GHz

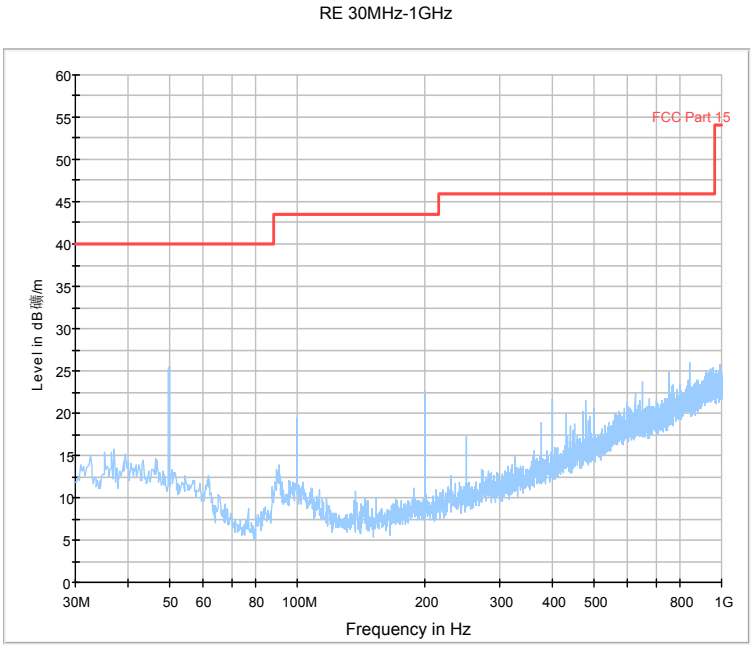

Fig.82. Radiated emission: 8DPSK, Channel 0, 30 MHz - 1 GHz

©Copyright. All rights reserved by TMC Beijing.

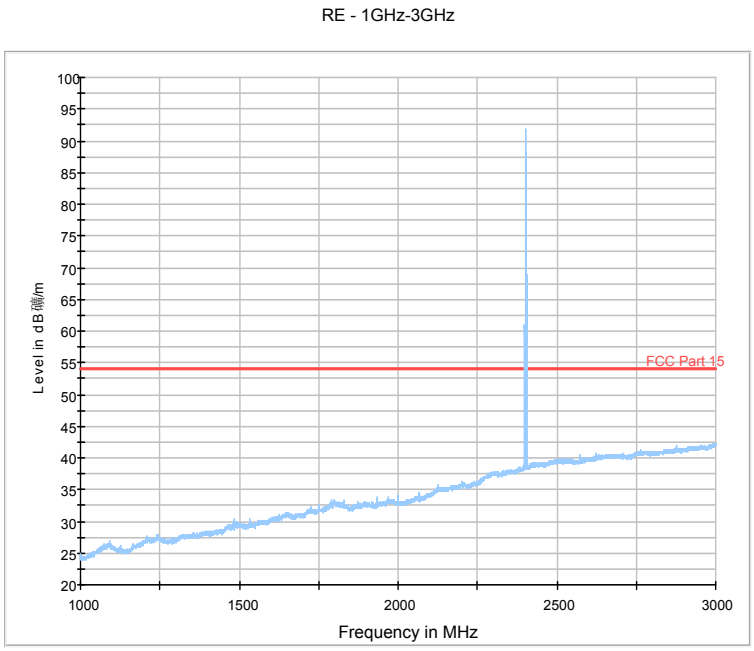

Fig.83. Radiated emission: 8DPSK, Channel 0, 1 GHz - 3 GHz

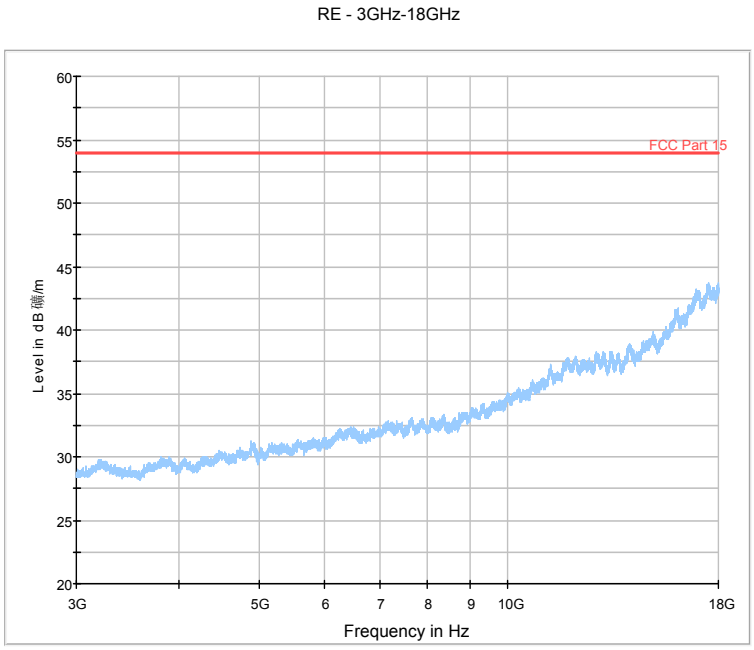

Fig.84. Radiated emission: 8DPSK, Channel 0, 3 GHz - 18 GHz

©Copyright. All rights reserved by TMC Beijing.

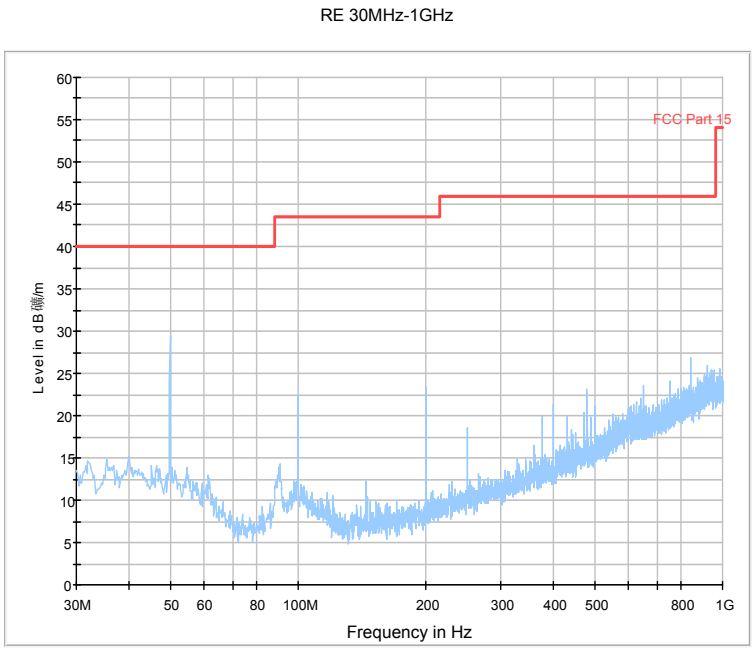

Fig.85. Radiated emission: 8DPSK, Channel 39, 30 MHz - 1 GHz

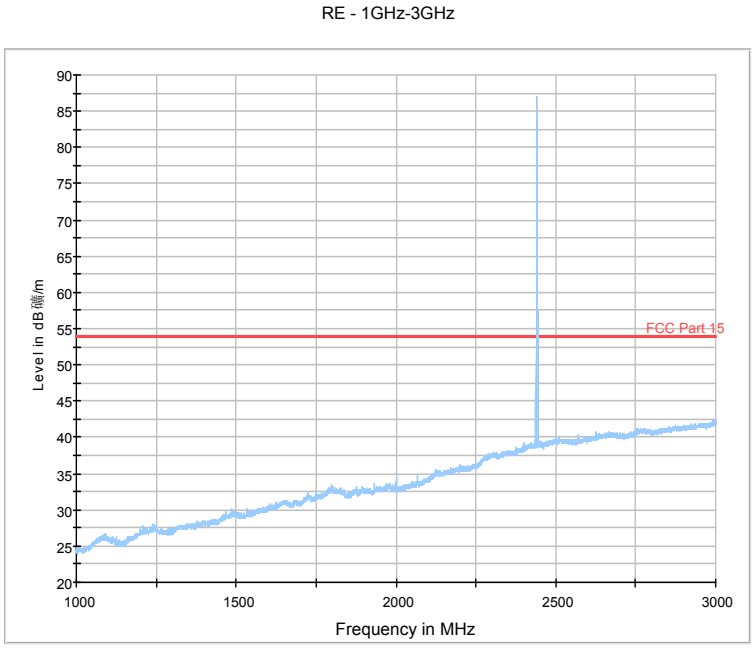

Fig.86. Radiated emission: 8DPSK, Channel 39, 1 GHz - 3 GHz

©Copyright. All rights reserved by TMC Beijing.

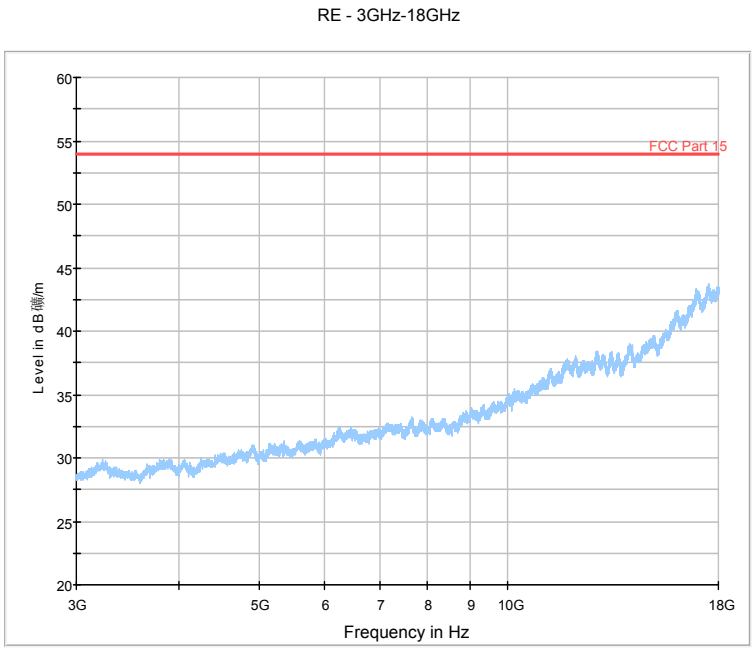

Fig.87. Radiated emission: 8DPSK, Channel 39, 3 GHz - 18 GHz

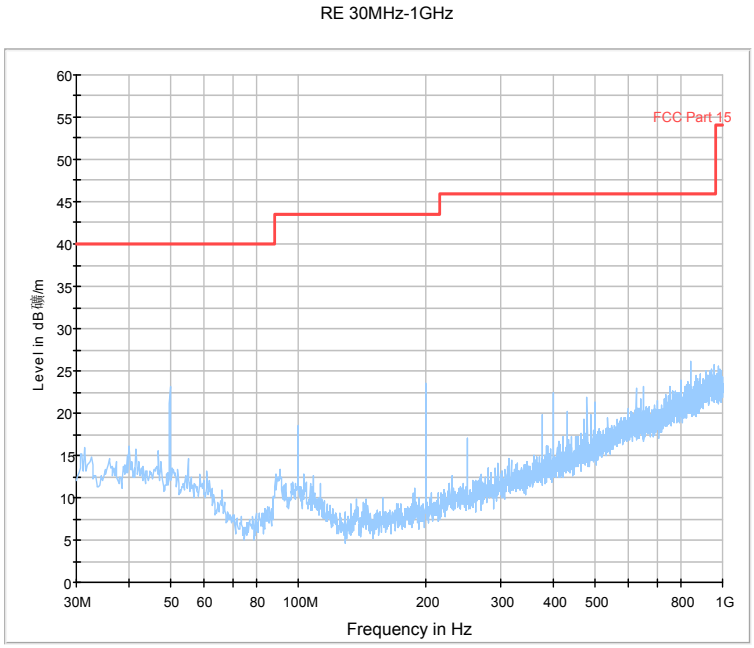

Fig.88. Radiated emission: 8DPSK, Channel 78, 30 MHz - 1 GHz

©Copyright. All rights reserved by TMC Beijing.

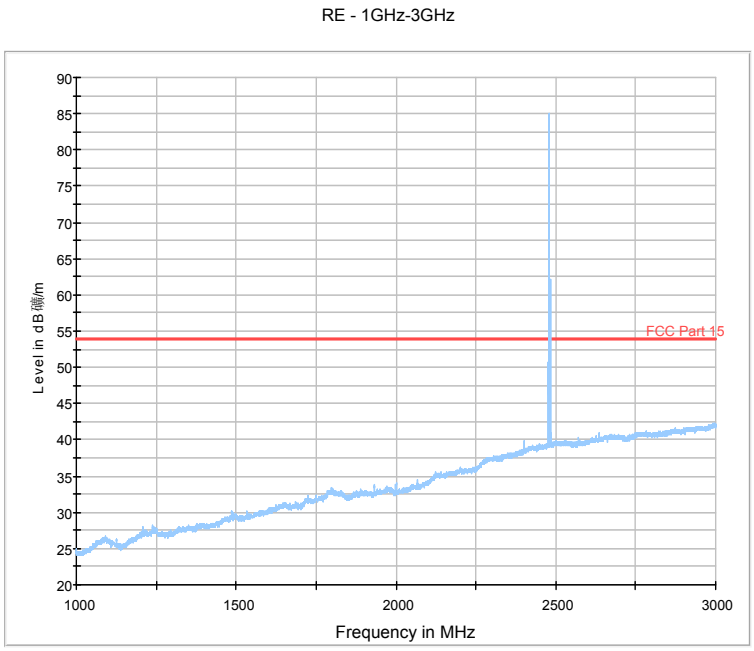

Fig.89. Radiated emission: 8DPSK, Channel 78, 1 GHz - 3 GHz

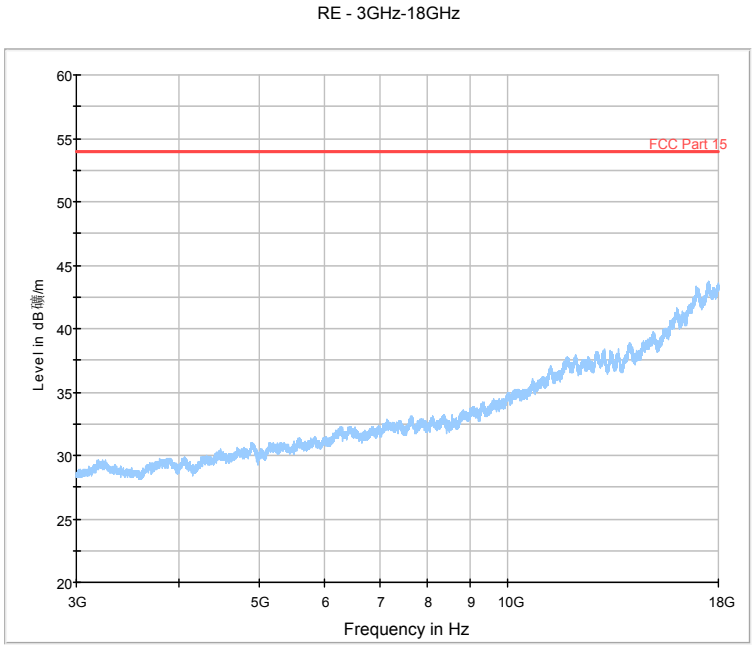

Fig.90. Radiated emission: 8DPSK, Channel 78, 3 GHz - 18 GHz

©Copyright. All rights reserved by TMC Beijing.

RE - Power-2.38GHz-2.45GHz

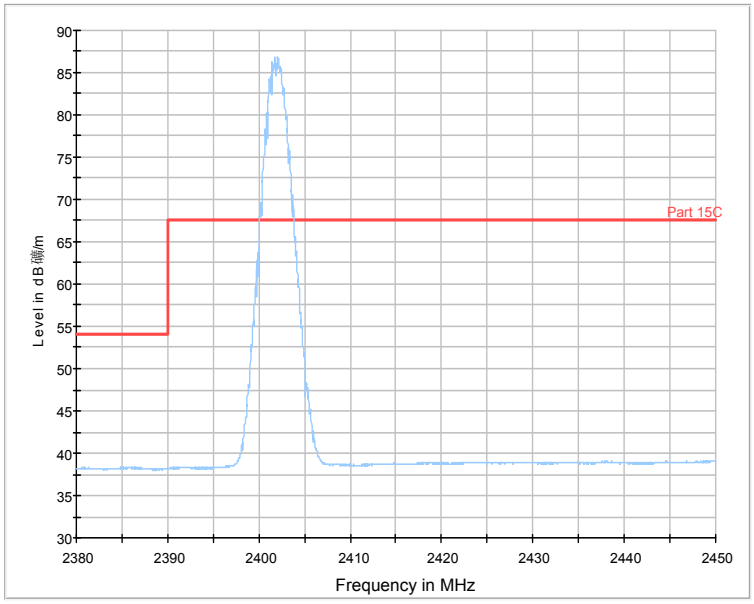

Fig.91. Radiated emission (Power): 8DPSK, low channel

RE - Power-2.45GHz-2.5GHz

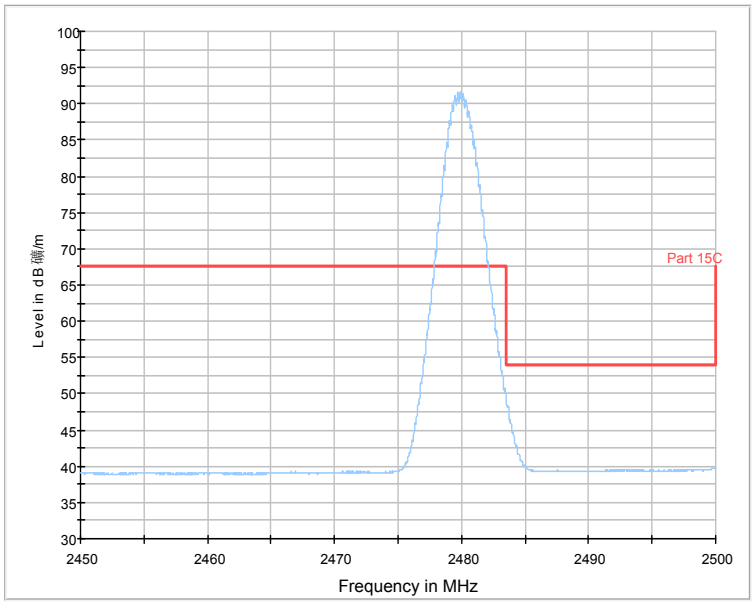

Fig.92. Radiated emission (Power): 8DPSK, high channel

©Copyright. All rights reserved by TMC Beijing.

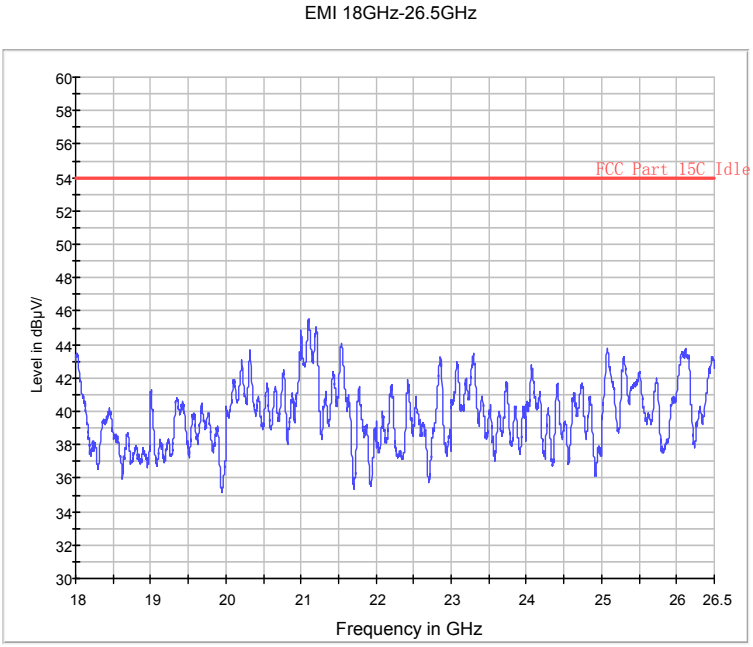

Fig.93. Radiated emission: 8DPSK, 18 GHz - 26 GHz

©Copyright. All rights reserved by TMC Beijing.

A.6. Time of Occupancy (Dwell Time)

Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii) RSS-210 A8.1 (4)	< 400

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

Measurement Result:

For GFSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.94	109.66	P
		Fig.95		
	DH3	Fig.96	161.70	P
		Fig.97		
	DH5	Fig.98	217.75	P
		Fig.99		

For π/4 DQPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.100	108.01	P
		Fig.101		
	DH3	Fig.102	174.90	P
		Fig.103		
	DH5	Fig.104	177.42	P
		Fig.105		

For 8DPSK

Channel	Packet	Dwell Time (ms)		Conclusion
39	DH1	Fig.106	115.05	P
		Fig.107		
	DH3	Fig.108	178.20	P
		Fig.109		
	DH5	Fig.110	197.79	P
		Fig.111		

Conclusion: PASS

Test graphs as below:

©Copyright. All rights reserved by TMC Beijing.

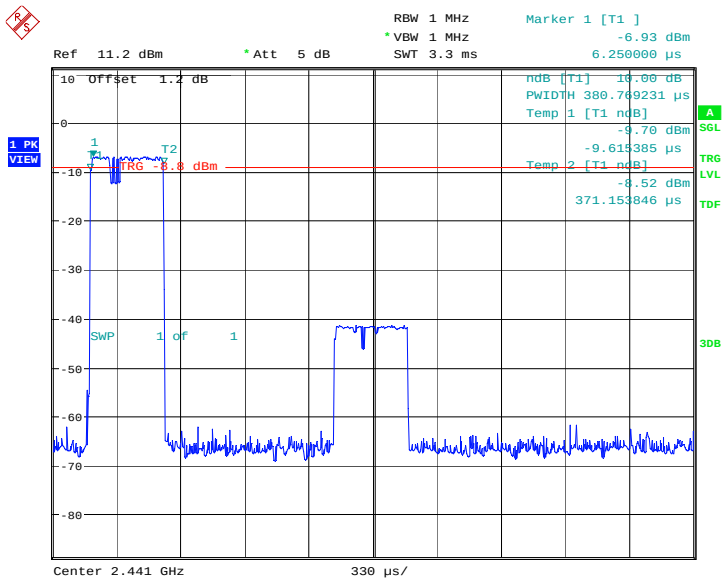

Fig.94. Time of occupancy (Dwell Time): Channel 39, GFSK-DH1

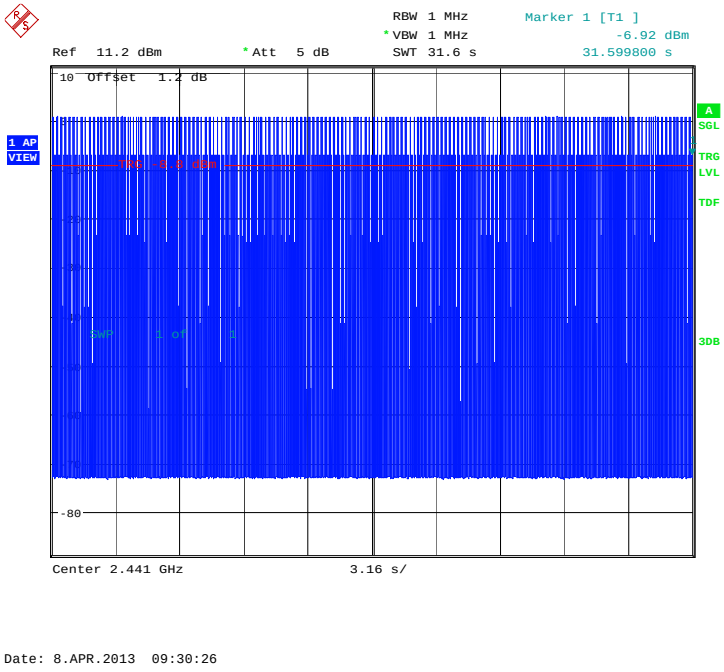

Fig.95. Number of Transmissions Measurement: Channel 39, GFSK-DH1

©Copyright. All rights reserved by TMC Beijing.

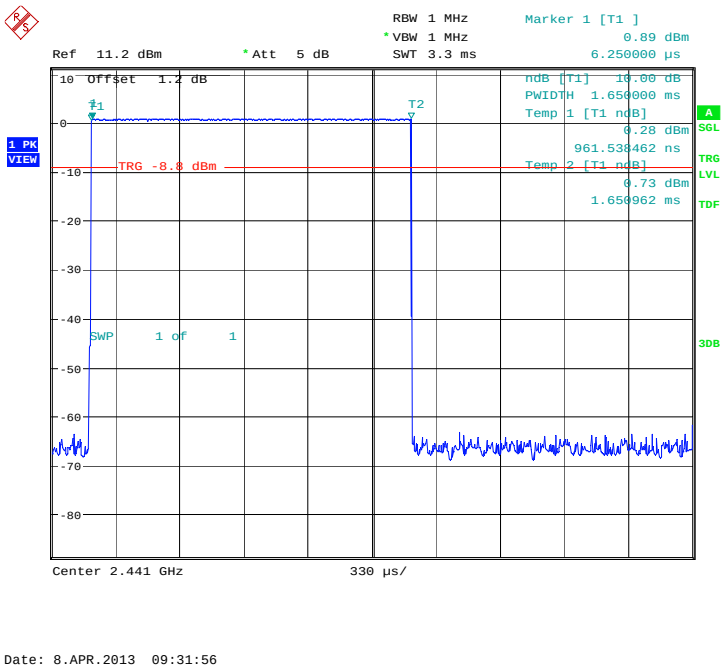

Fig.96. Time of occupancy (Dwell Time): Channel 39, GFSK-DH3

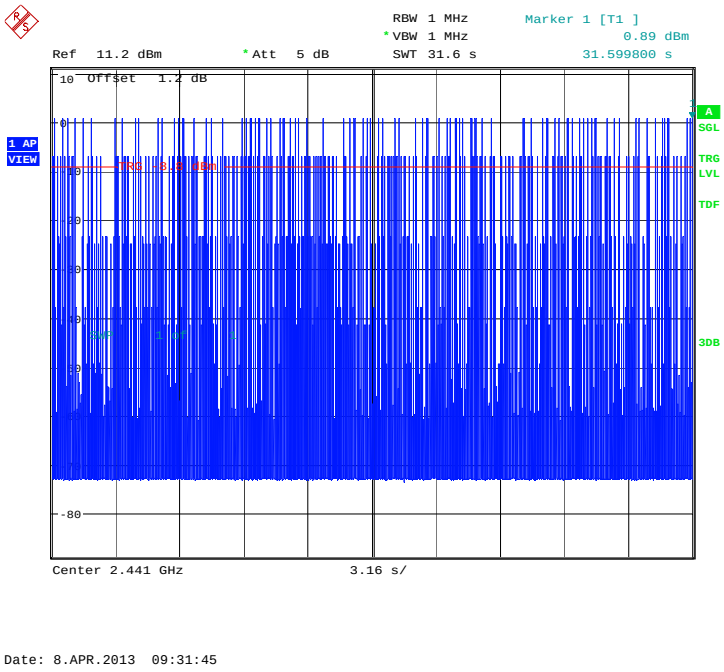

Fig.97. Number of Transmissions Measurement: Channel 39, GFSK-DH3

©Copyright. All rights reserved by TMC Beijing.

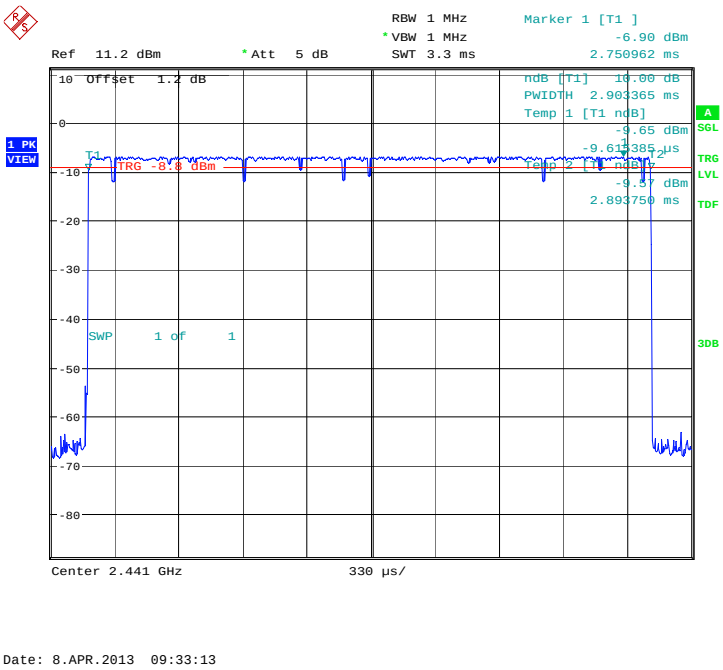

Fig.98. Time of occupancy (Dwell Time): Channel 39, GFSK-DH5

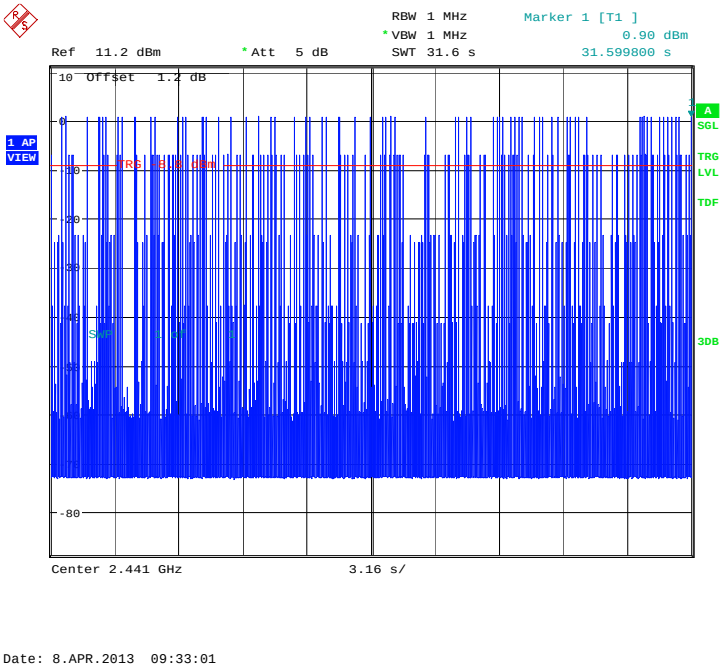

Fig.99. Number of Transmissions Measurement: Channel 39, GFSK-DH5

©Copyright. All rights reserved by TMC Beijing.

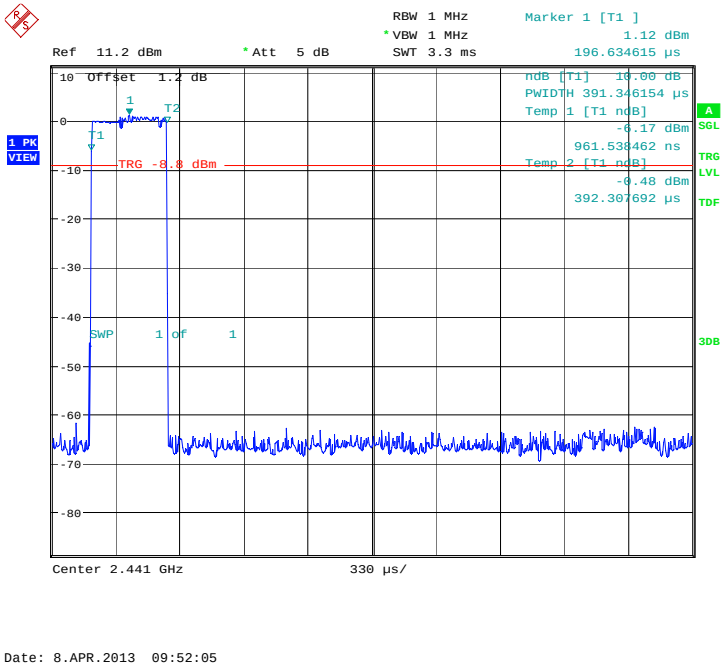

Fig.100. Time of occupancy (Dwell Time): Channel 39, π/4 DQPSK -DH1

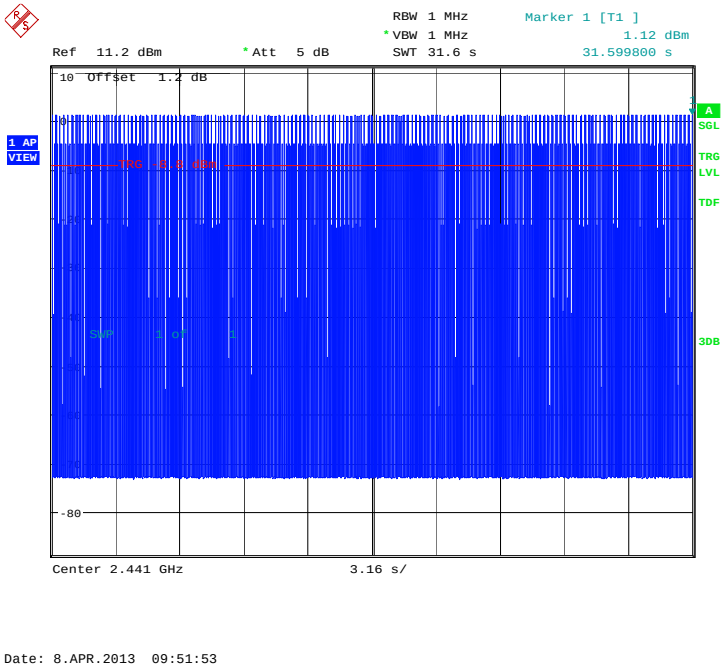

Fig.101. Number of Transmissions Measurement: Channel 39, π/4 DQPSK -DH1

©Copyright. All rights reserved by TMC Beijing.

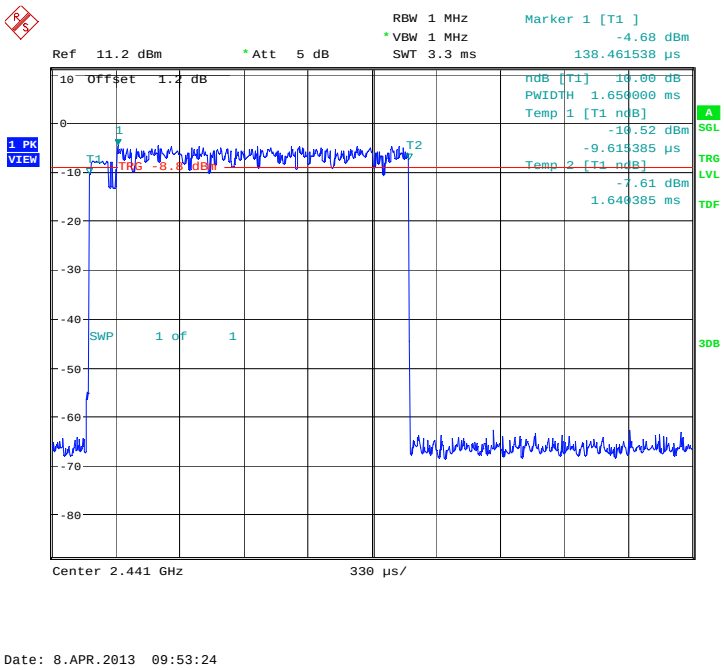

Fig.102. Time of occupancy (Dwell Time): Channel 39, π/4 DQPSK -DH3

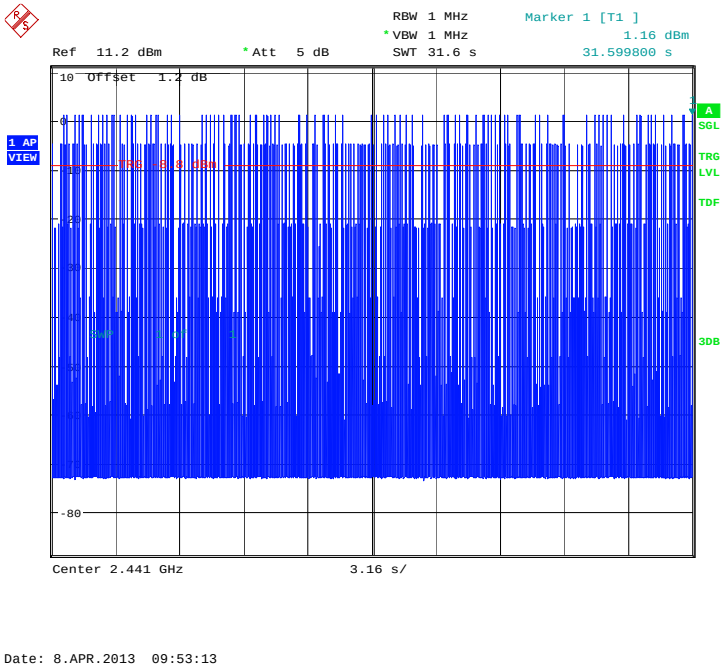

Fig.103. Number of Transmissions Measurement: Channel 39, π/4 DQPSK -DH3

©Copyright. All rights reserved by TMC Beijing.

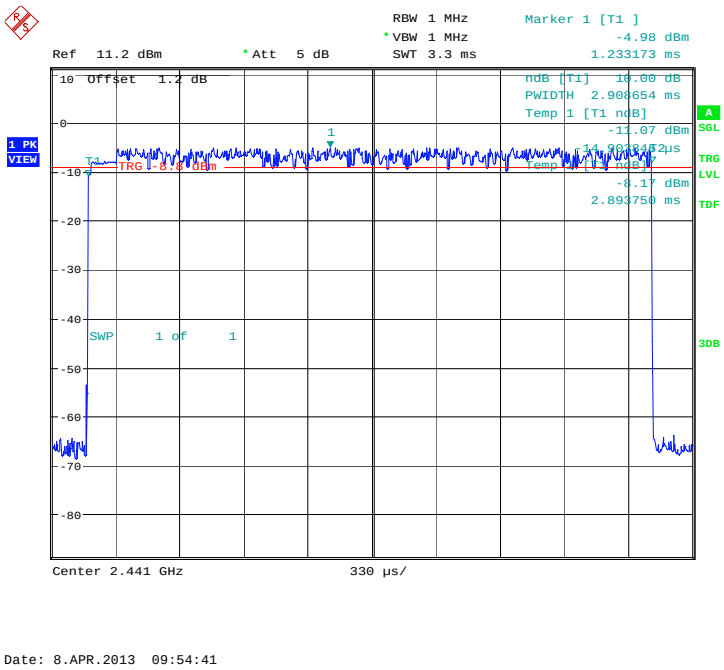

Fig.104. Time of occupancy (Dwell Time): Channel 39, π/4 DQPSK -DH5

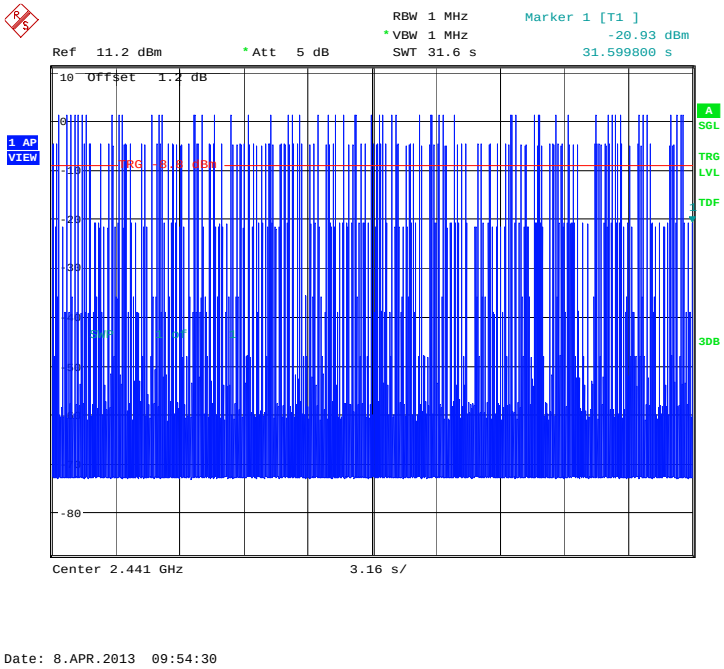

Fig.105. Number of Transmissions Measurement: Channel 39, π/4 DQPSK -DH5

©Copyright. All rights reserved by TMC Beijing.

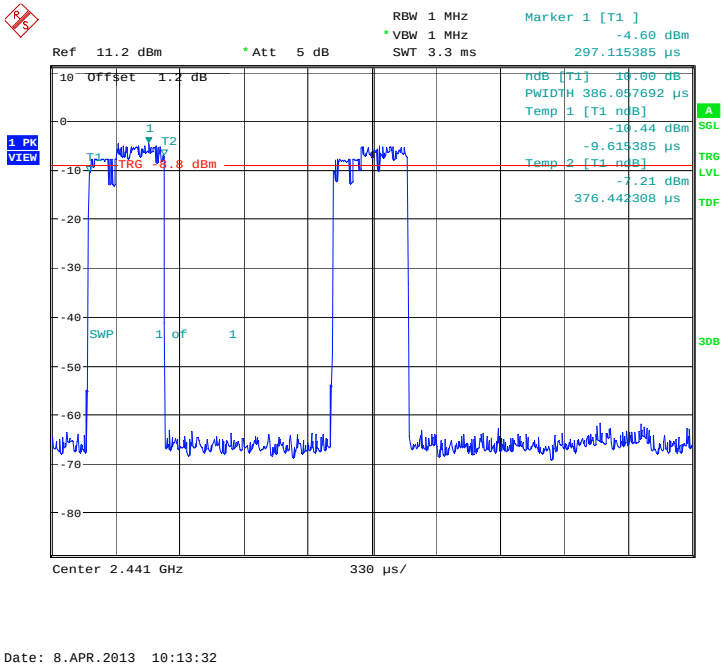

Fig.106. Time of occupancy (Dwell Time): Channel 39, 8DPSK-DH1

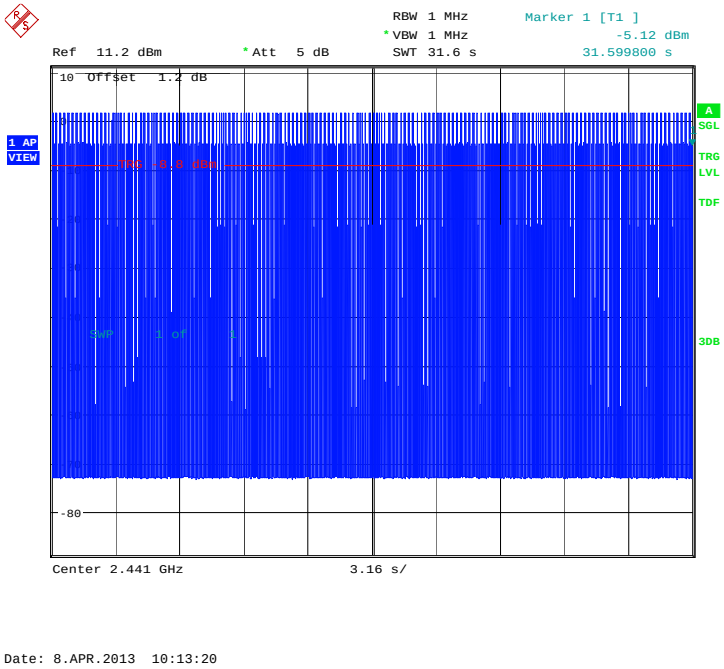

Fig.107. Number of Transmissions Measurement: Channel 39, 8DPSK -DH1

©Copyright. All rights reserved by TMC Beijing.

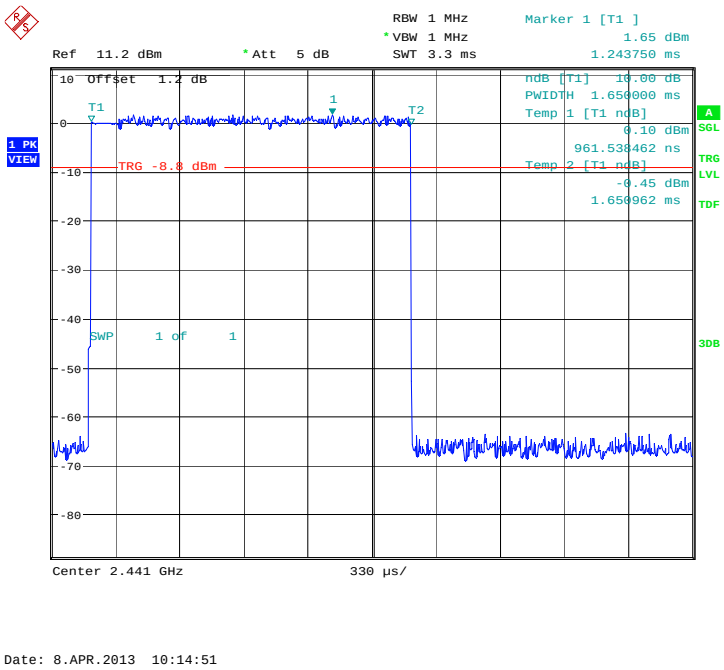

Fig.108. Time of occupancy (Dwell Time): Channel 39, 8DPSK -DH3

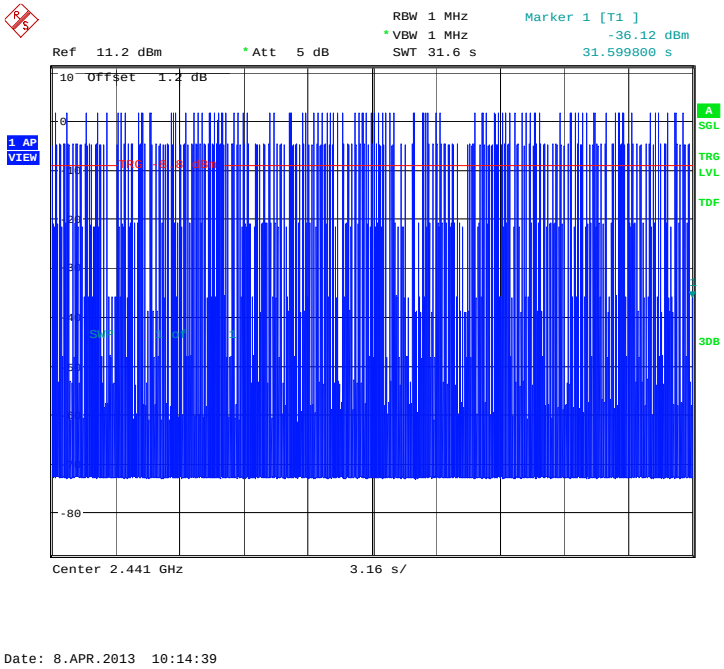

Fig.109. Number of Transmissions Measurement: Channel 39, 8DPSK -DH3

©Copyright. All rights reserved by TMC Beijing.

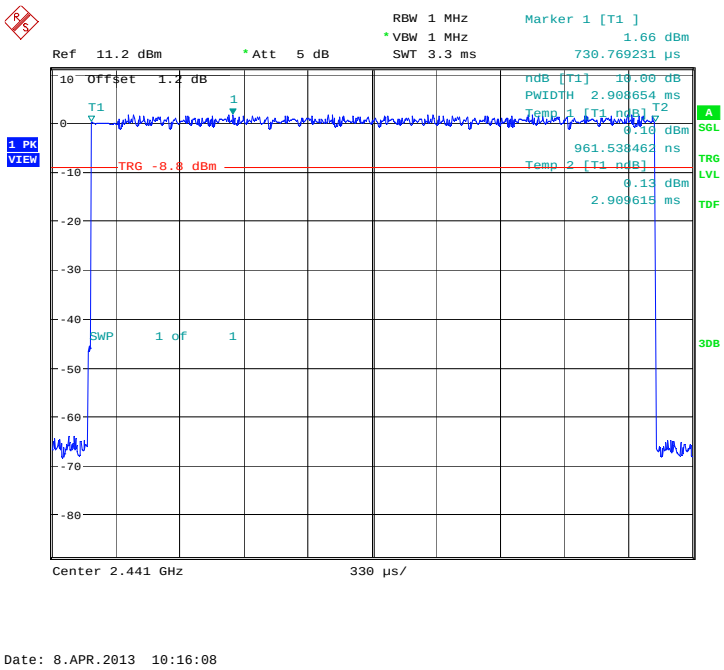

Fig.110. Time of occupancy (Dwell Time): Channel 39, 8DPSK -DH5

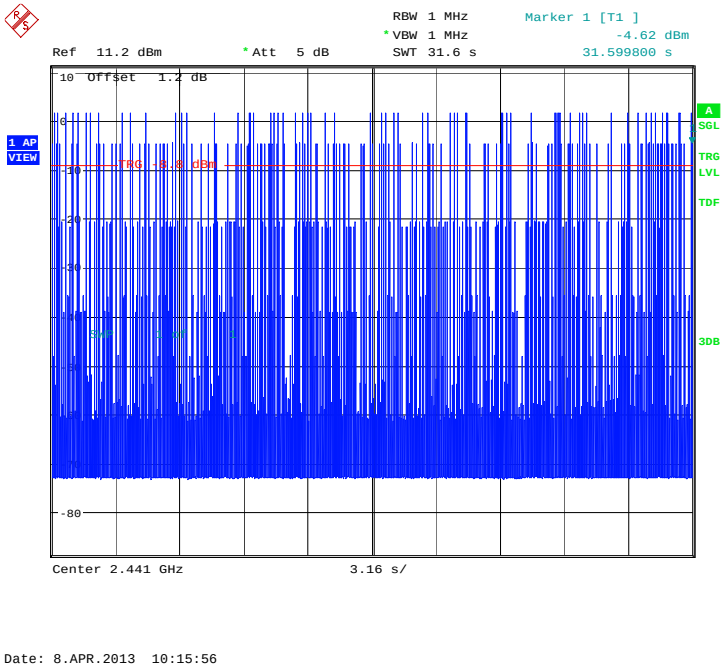

Fig.111. Number of Transmissions Measurement: Channel 39, 8DPSK -DH5

©Copyright. All rights reserved by TMC Beijing.

A.7. 20dB Bandwidth

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1) RSS-210 A8.1 (1)	NA *

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

* Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for "carrier frequency separation" test case, in Annex A.8.

Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.112	870.19	NA
39	Fig.113	870.19	NA
78	Fig.114	870.19	NA

For π/4 DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.115	1293.27	NA
39	Fig.116	1264.42	NA
78	Fig.117	1298.08	NA

For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.118	1288.46	NA
39	Fig.119	1264.42	NA
78	Fig.120	1278.84	NA

Conclusion: NA

Test graphs as below:

©Copyright. All rights reserved by TMC Beijing.

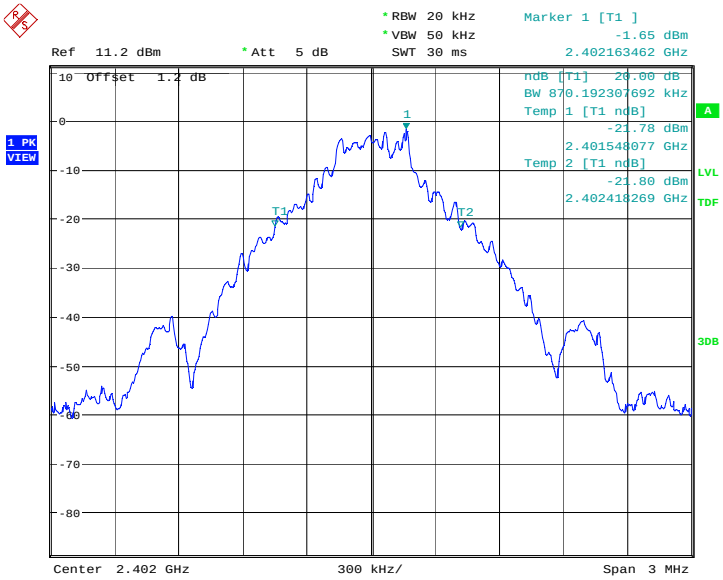

Date: 8.APR.2013 09:33:47

Fig.112. 20dB Bandwidth: GFSK, Channel 0

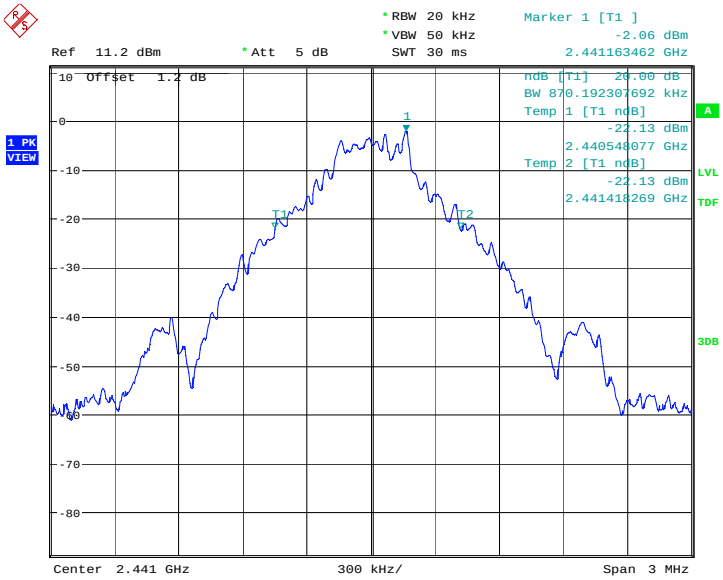

Date: 8.APR.2013 09:34:19

Fig.113. 20dB Bandwidth: GFSK, Channel 39

©Copyright. All rights reserved by TMC Beijing.

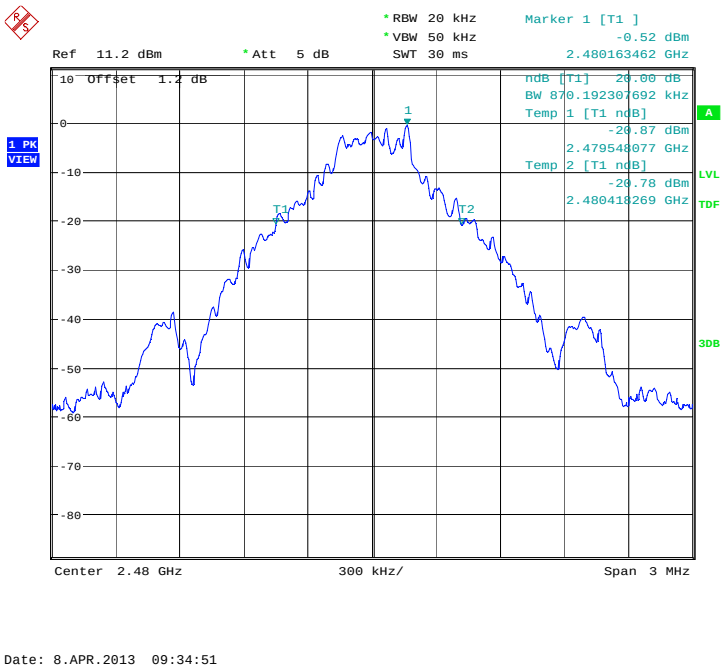

Fig.114. 20dB Bandwidth: GFSK, Channel 78

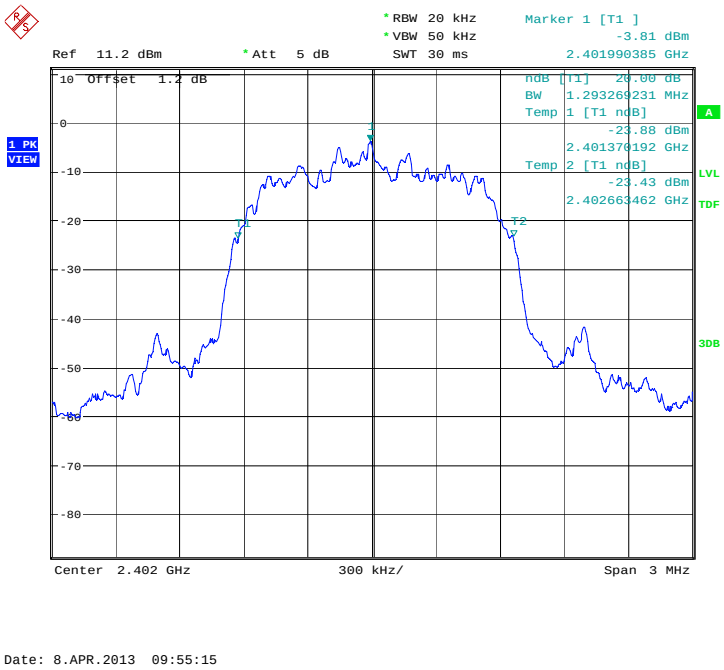

Fig.115. 20dB Bandwidth: π/4 DQPSK, Channel 0

©Copyright. All rights reserved by TMC Beijing.

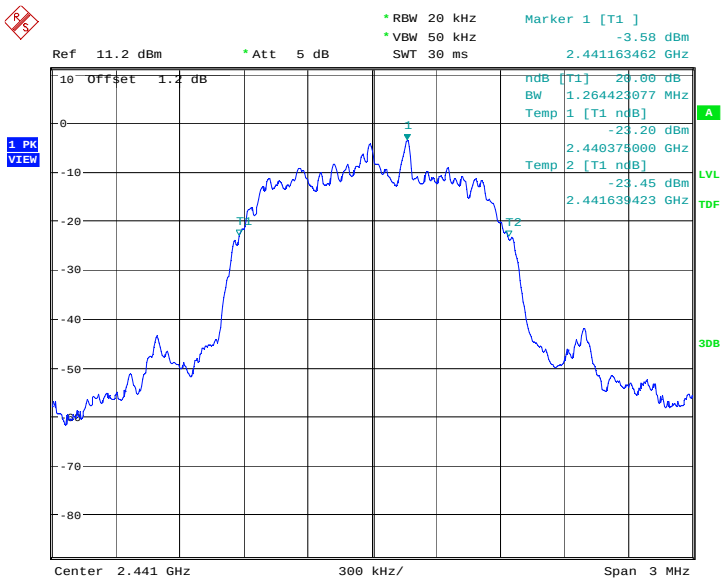

Date: 8.APR.2013 09:55:47

Fig.116. 20dB Bandwidth: π/4 DQPSK, Channel 39

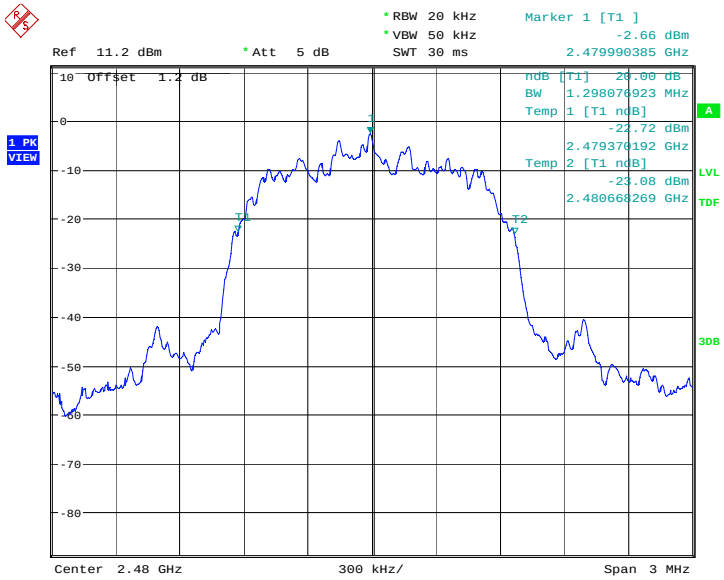

Date: 8.APR.2013 09:56:19

Fig.117. 20dB Bandwidth: π/4 DQPSK, Channel 78

©Copyright. All rights reserved by TMC Beijing.

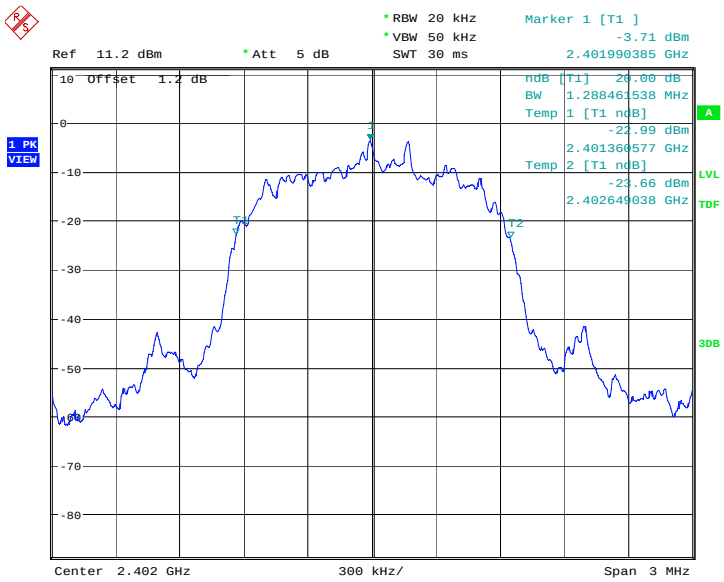

Date: 8.APR.2013 10:16:42

Fig.118. 20dB Bandwidth: 8DPSK, Channel 0

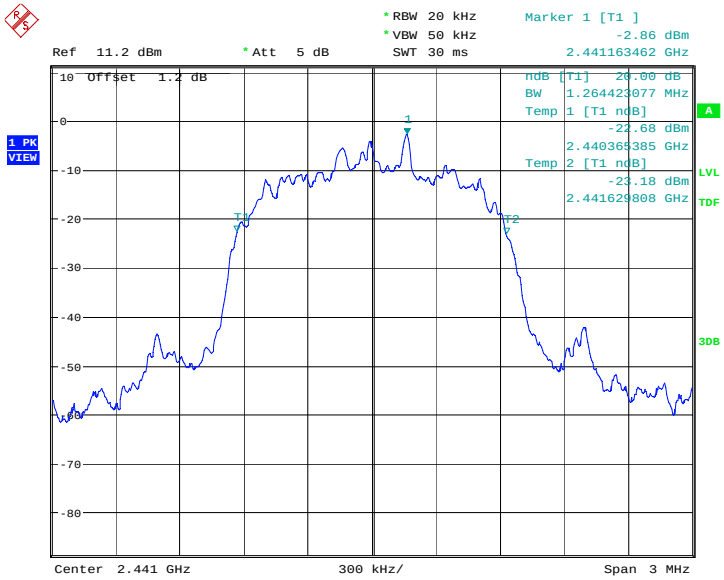

Date: 8.APR.2013 10:17:14

Fig.119. 20dB Bandwidth: 8DPSK, Channel 39

©Copyright. All rights reserved by TMC Beijing.

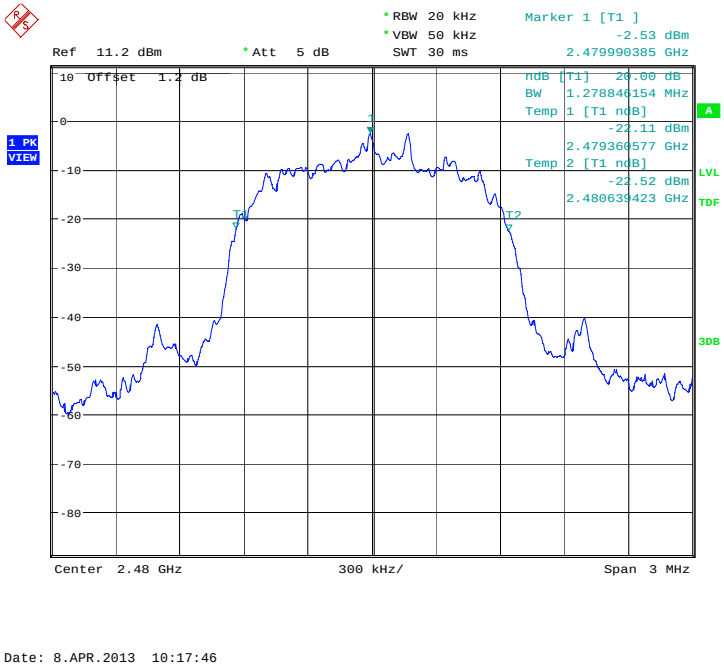

Fig.120. 20dB Bandwidth: 8DPSK, Channel 78

©Copyright. All rights reserved by TMC Beijing.

A.8. Carrier Frequency Separation

Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1) RSS-210 A8.1 (2)	over 25 kHz or (2/3) * 20dB bandwidth

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

* Comment: This limit should be over 25 kHz or (2/3) * 20dB bandwidth, whichever is greater.

Measurement Result:

For GFSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.121	990.38	P

For π/4 DQPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.122	1274.04	P

For 8DPSK

Channel	Carrier frequency separation (kHz)		Conclusion
39	Fig.123	1149.04	P

Conclusion: PASS

Test graphs as below:

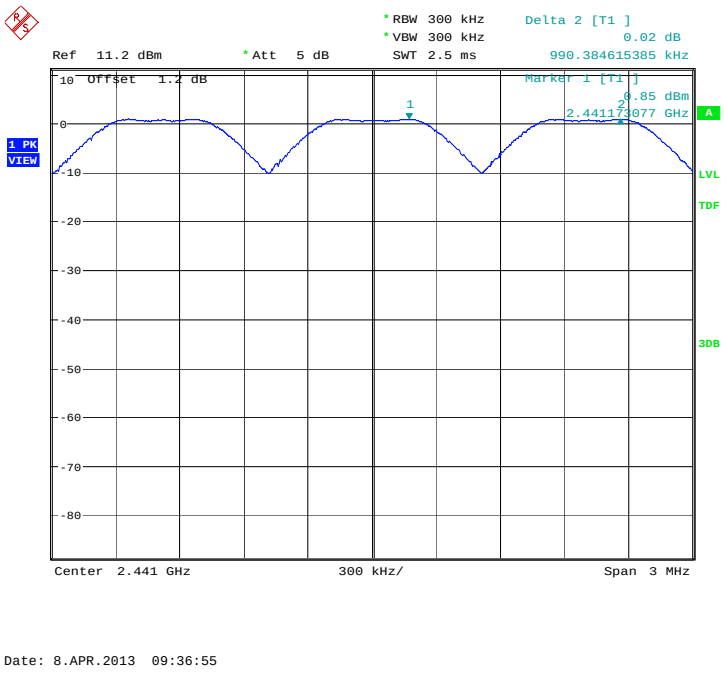

Fig.121. Carrier frequency separation measurement: GFSK, Channel 39

©Copyright. All rights reserved by TMC Beijing.

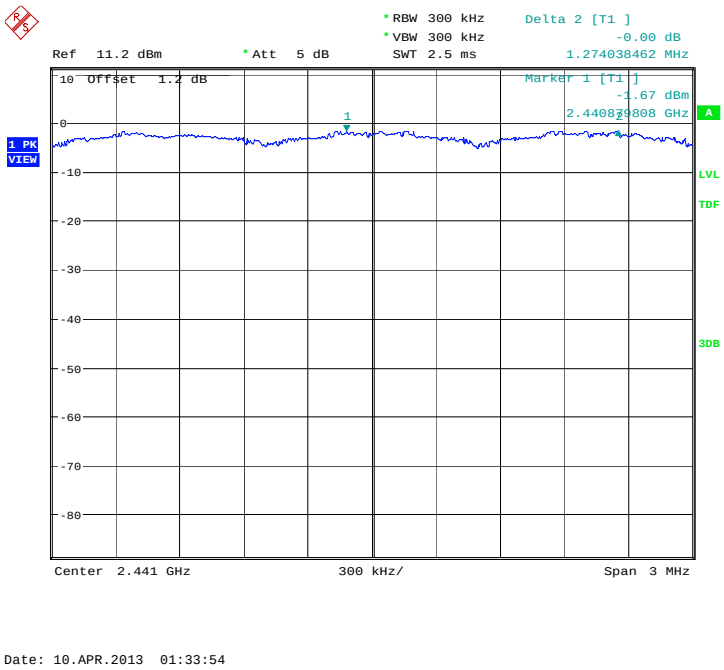

Fig.122. Carrier frequency separation measurement: π/4 DQPSK, Channel 39

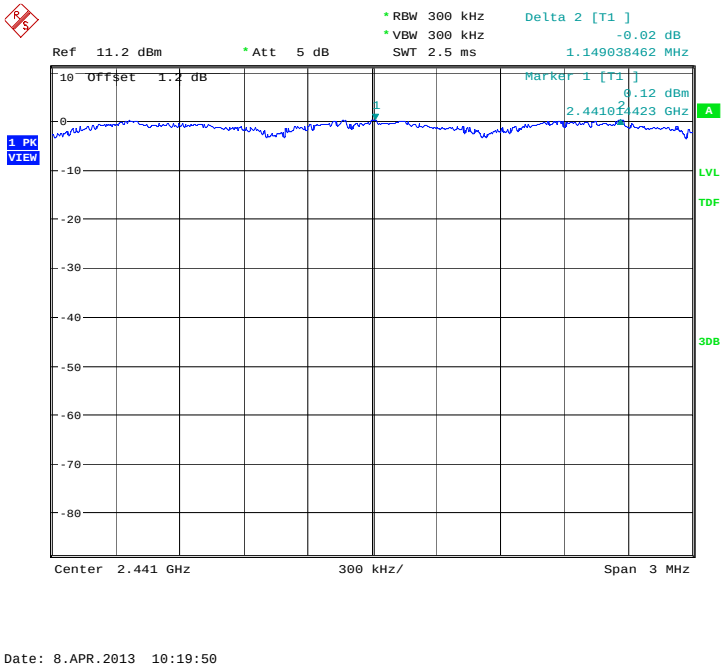

Fig.123. Carrier frequency separation measurement: 8DPSK, Channel 39

©Copyright. All rights reserved by TMC Beijing.

A.9. Number of Hopping Channels

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii) RSS-210 A8.1 (4)	At least 15 non-overlapping channels

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

Measurement Result:

For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.124	79	P
40~78	Fig.125		

Forπ/4 DQPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.126	79	P
40~78	Fig.127		

For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.128	79	P
40~78	Fig.129		

Conclusion: PASS

Test graphs as below:

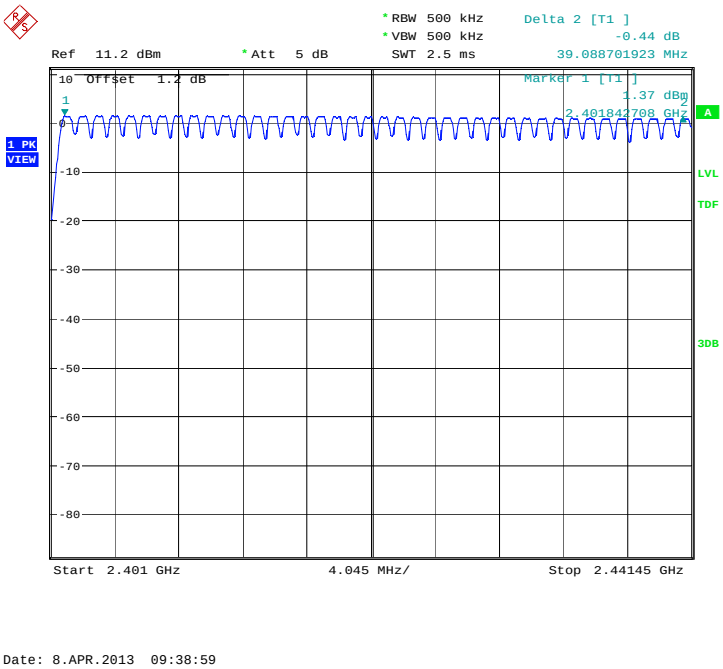

Fig.124. Number of hopping frequencies: GFSK, Channel 0 - 39

©Copyright. All rights reserved by TMC Beijing.

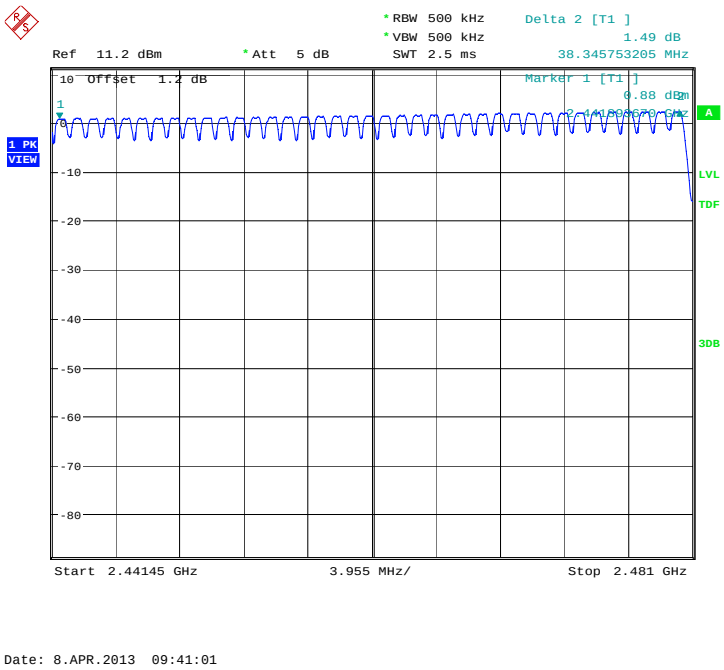

Fig.125. Number of hopping frequencies: GFSK, Channel 40 - 78

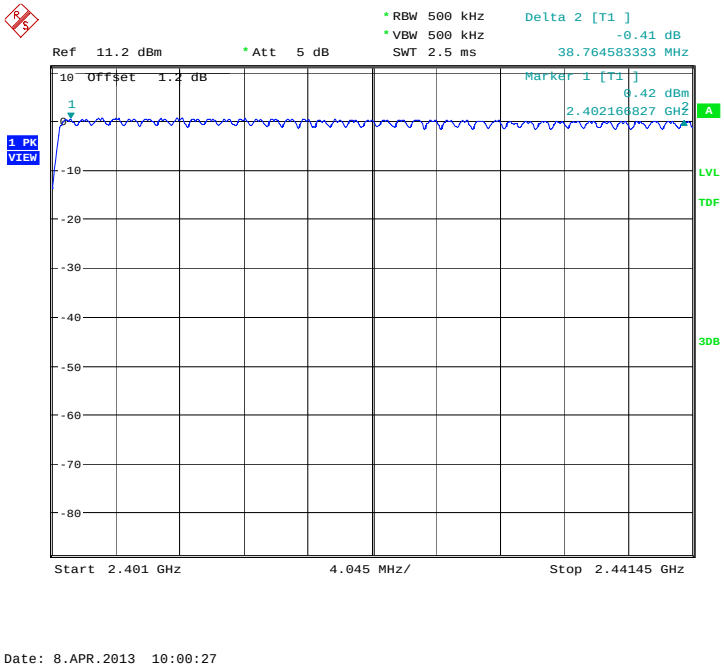

Fig.126. Number of hopping frequencies: π/4 DQPSK, Channel 0 - 39

©Copyright. All rights reserved by TMC Beijing.

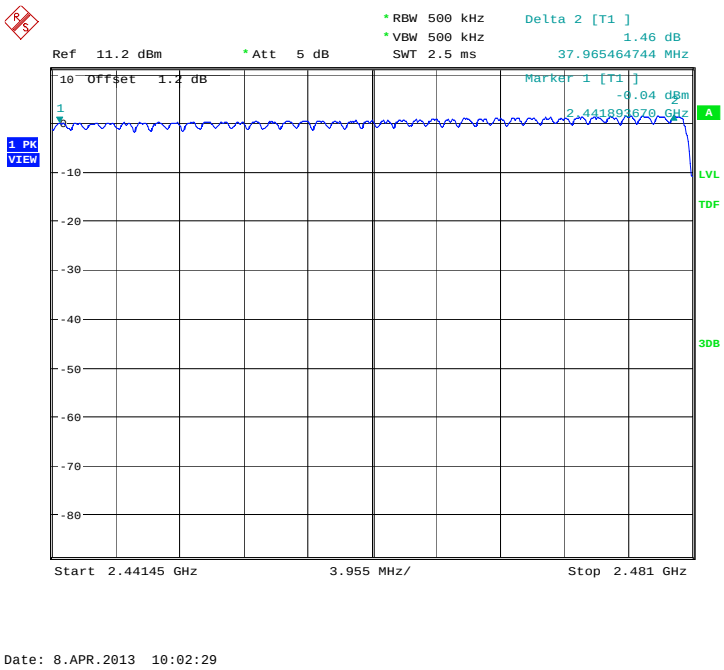

Fig.127. Number of hopping frequencies: π/4 DQPSK, Channel 40 - 78

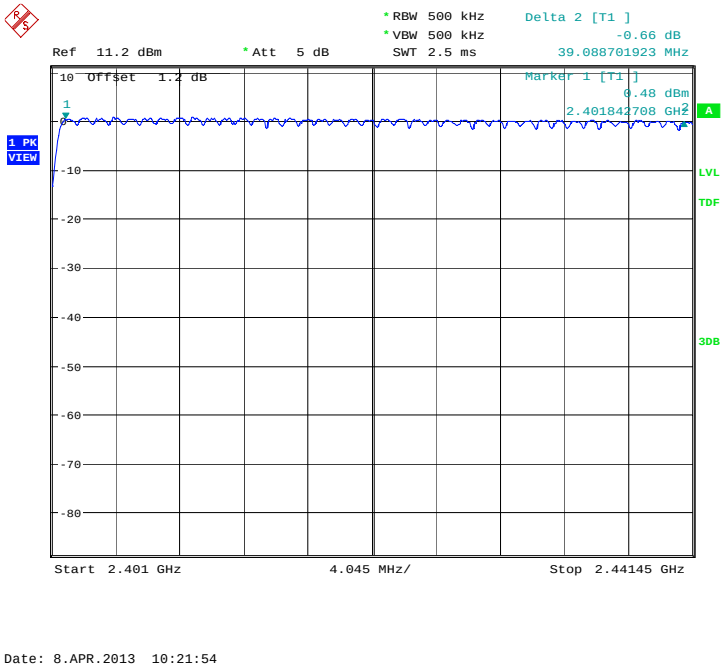

Fig.128. Number of hopping frequencies: 8DPSK, Channel 0 - 39

©Copyright. All rights reserved by TMC Beijing.

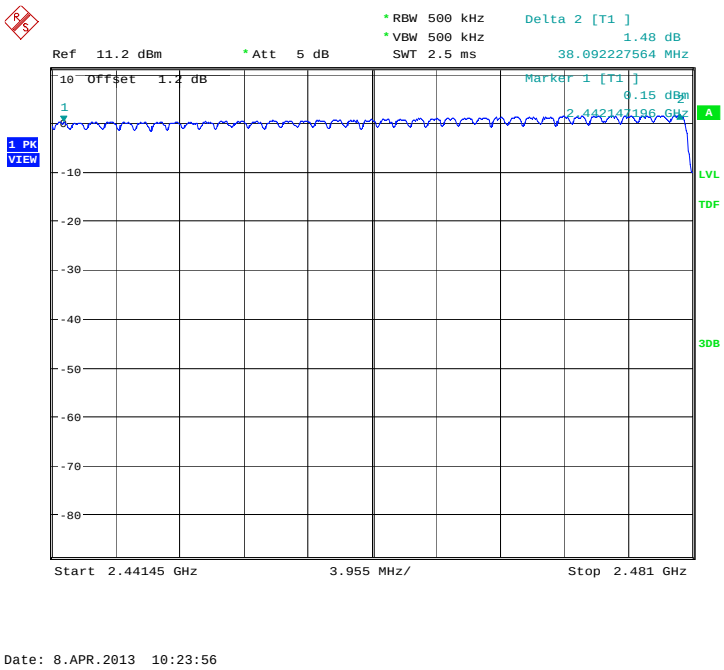

Fig.129. Number of hopping frequencies: 8DPSK, Channel 40 - 78

©Copyright. All rights reserved by TMC Beijing.

A.10. AC Powerline Conducted Emission

Test Condition

Voltage（V）	Frequency（Hz）
120	60

Measurement Result and limit:

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Conclusion
0.15 to 0.5	66 to 56	P
0.5 to 5	56	
5 to 30	60	
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

Bluetooth (Average Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Conclusion
0.15 to 0.5	56 to 46	P
0.5 to 5	46	
5 to 30	50	
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

The measurement is made according to Public notice DA 00-705 and ANSI C63.4

Conclusion: PASS

Test graphs as below:

©Copyright. All rights reserved by TMC Beijing.

Traffic

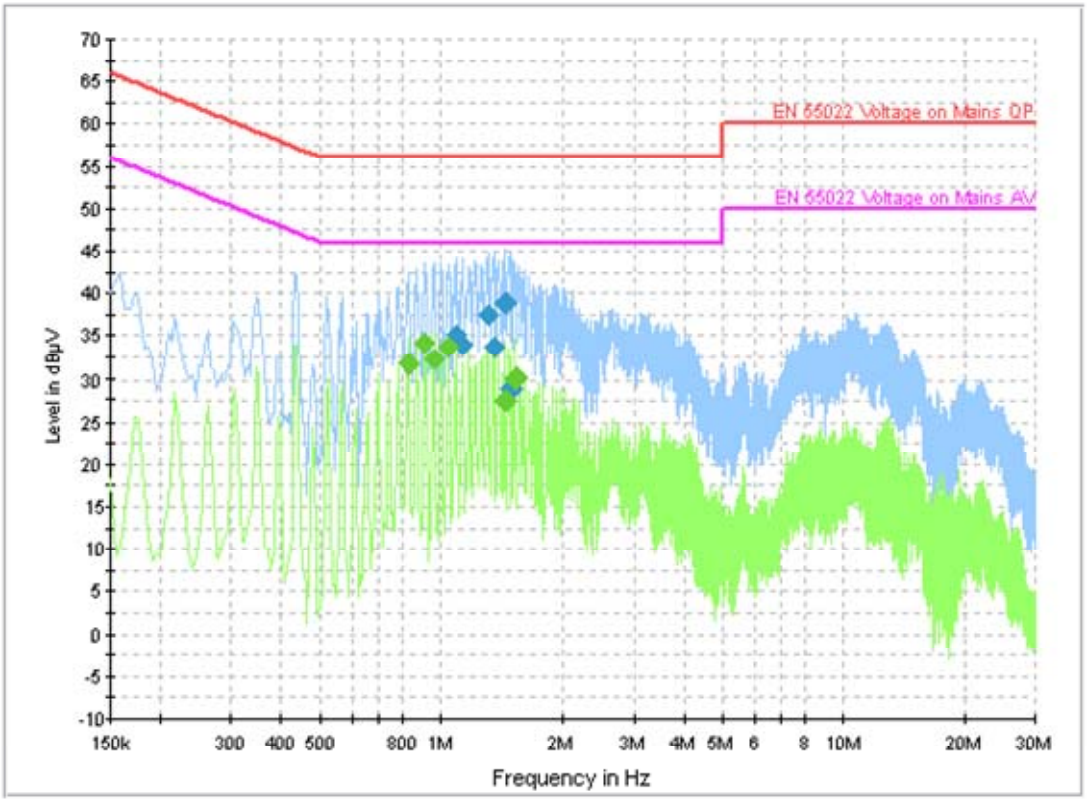

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.095000	35.0	GND	L1	10.0	21.0	56.0
1.140000	33.9	GND	L1	10.0	22.1	56.0
1.311000	37.4	GND	L1	10.0	18.6	56.0
1.356000	33.8	GND	L1	10.0	22.2	56.0
1.441500	38.7	GND	L1	10.0	17.3	56.0
1.491000	28.8	GND	L1	10.0	27.2	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.829500	31.8	GND	L1	10.0	14.2	46.0
0.915000	34.2	GND	L1	10.0	11.8	46.0
0.960000	32.3	GND	L1	10.0	13.7	46.0
1.045500	33.7	GND	L1	10.0	12.3	46.0
1.441500	27.5	GND	L1	10.0	18.5	46.0
1.527000	30.2	GND	L1	10.0	15.8	46.0

©Copyright. All rights reserved by TMC Beijing.

Idle:

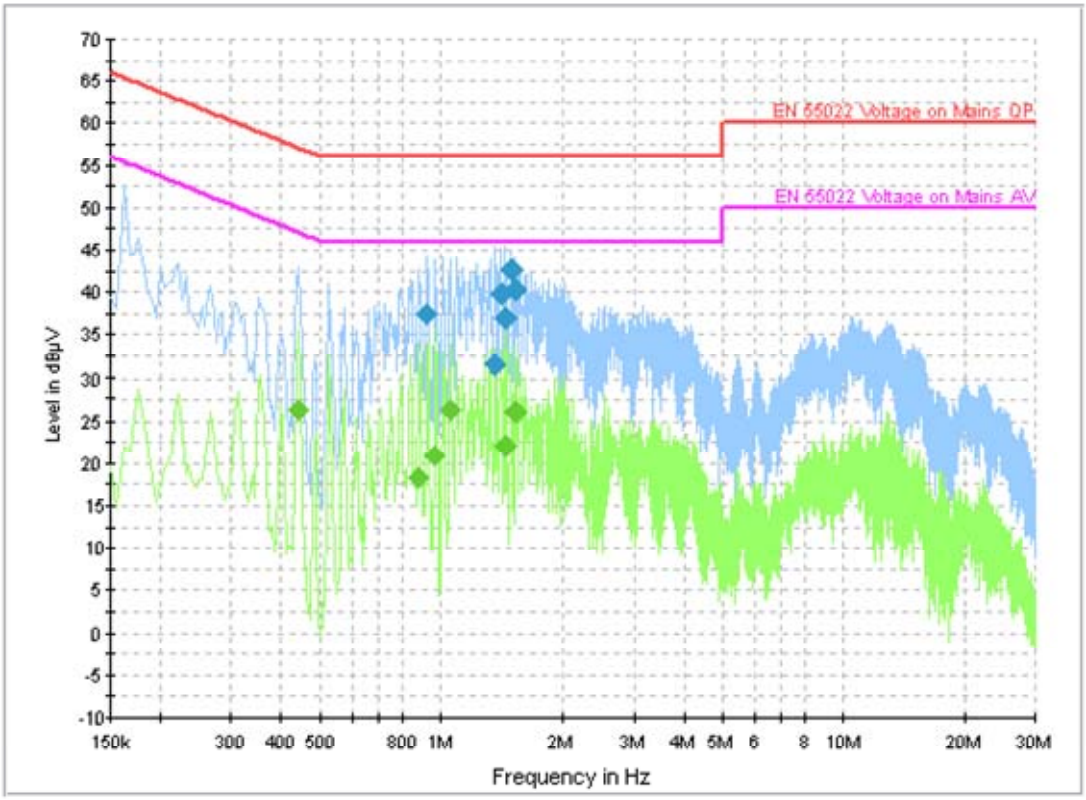

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.924000	37.5	GND	L1	10.0	18.5	56.0
1.365000	31.4	GND	L1	10.0	24.6	56.0
1.405500	39.9	GND	L1	10.0	16.1	56.0
1.450500	37.0	GND	L1	10.0	19.0	56.0
1.491000	42.7	GND	L1	10.0	13.3	56.0
1.536000	40.3	GND	L1	10.0	15.7	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.442500	26.2	GND	L1	10.0	20.8	47.0
0.883500	18.4	GND	L1	10.0	27.6	46.0
0.969000	20.8	GND	L1	10.0	25.2	46.0
1.054500	26.4	GND	L1	10.0	19.6	46.0
1.450500	22.0	GND	L1	10.0	24.0	46.0
1.536000	26.2	GND	L1	10.0	19.8	46.0

©Copyright. All rights reserved by TMC Beijing.

A.11 RECEIVER RADIATION EMISSION

Reference

FCC: CFR Part 15.109, 2.1053/ RSS-Gen *7.2.2*

A.11.1 Method of Measurement

The measurement procedure in ANSI C64.4-2003 is used. The EUT is placed on a 80cm height non-conductive table locating on the center of turntable. From 30MHz-1GHz, the measurement distance is 10m. For frequency range above 1GHz, the measurement distance is 3m.

The EUT is measured with travel charger and the operating mode is idle without CMU200's signaling.

A.11.2 Method of Measurement

Frequency of Emission (MHz)	Limit (dBμV/m)	Measurement Distance (m)
30-88	30	10
88-216	33.5	10
216-960	36	10
960-1000	44	10
>1000	54	3

©Copyright. All rights reserved by TMC Beijing.

A. 11.3 Measurement results

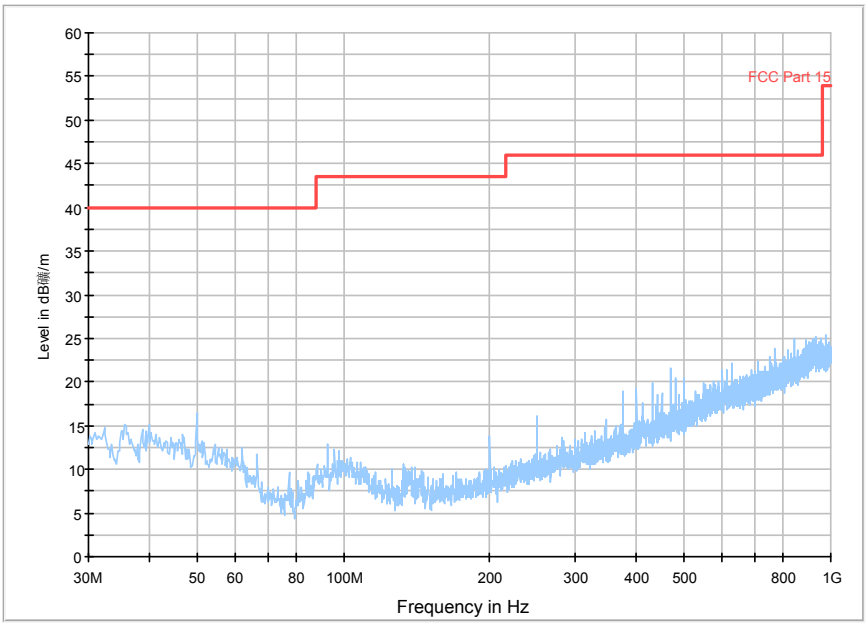

IF bandwidth: 120 kHz

Idle Mode: 30MHz-1GHz

RE - 1GHz-3GHz

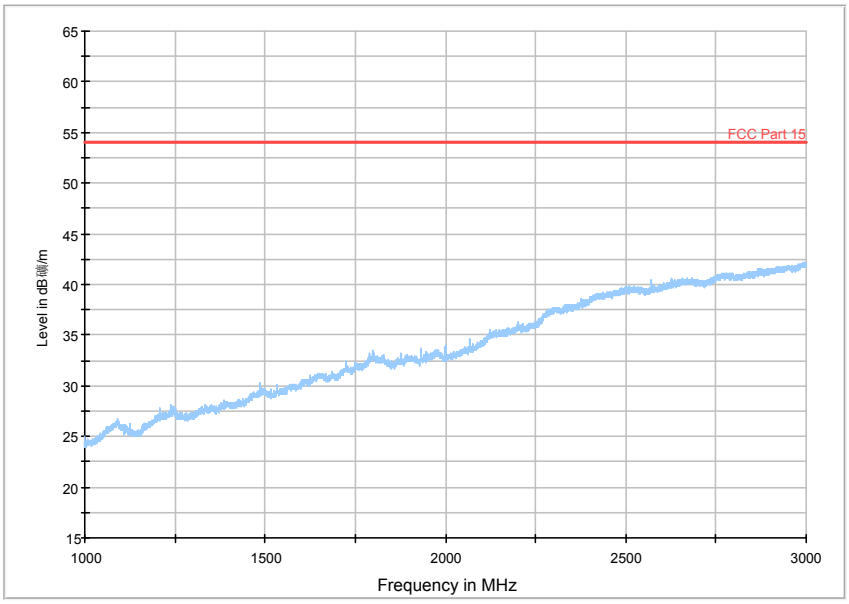

RBW / VBW 1 MHz

Idle Mode: 1GHz-3GHz

©Copyright. All rights reserved by TMC Beijing.

RE - 3GHz-18GHz

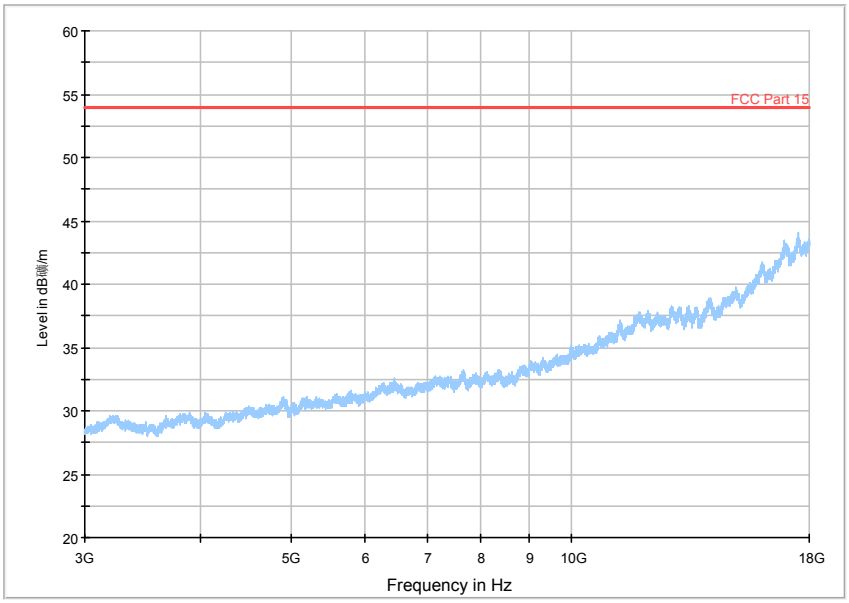

RBW / VBW 1 MHz

Idle Mode: 3GHz-18GHz

©Copyright. All rights reserved by TMC Beijing.