



SAR EVALUATION REPORT

Applicant Name:
 Sony Mobile Communications AB
 Nya Vattentorget
 SE-221 88, Lund
 Sweden

Date of Testing:
 05/06/13 - 05/13/13; 06/18/13 - 08/08/13
Test Site/Location:
 PCTEST Lab, Columbia, MD, USA
Document Serial No.:
 OY1307011148.PY7

FCC ID: PY7PM-0430

APPLICANT: SONY MOBILE COMMUNICATIONS AB

DUT Type: Portable Handset
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Type Number: PM-0430-BM

Equipment Class	Band & Mode	Tx Frequency	Measured Conducted Power [dBm]	SAR			
				1 gm Head (W/kg)	1 gm Body-Worn (W/kg)	1 gm Hotspot (W/kg)	10 gm Extremity (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	33.03	0.26	0.40	1.08	
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	30.47	0.13	0.49	1.02	2.25
PCE	UMTS 850	826.40 - 846.60 MHz	24.48	0.35	0.44	0.88	
PCE	UMTS 1900	1852.4 - 1907.6 MHz	23.67	0.26	0.96	1.10	3.52
PCE	UMTS 1750	1712.4 - 1752.5 MHz	24.27	0.41	0.88	0.76	3.46
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	23.27	0.19	0.87	1.02	2.54
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	23.41	0.16	0.62	0.85	2.99
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	22.82	0.23	0.28	0.56	
PCE	LTE Band 17	706.5 - 713.5 MHz	23.13	< 0.1	0.11	0.17	
PCE	LTE Band 7	2502.5 - 2567.5 MHz	22.77	0.45	0.90	0.93	3.85
DTS	2.4 GHz WLAN	2412 - 2462 MHz	13.13	1.10	0.18	0.32	
DTS	5.8 GHz WLAN	5745 - 5825 MHz	13.48	1.02	0.13		0.44
NII	5.2 GHz WLAN	5180 - 5240 MHz	13.39	0.81	< 0.1		0.58
NII	5.3 GHz WLAN	5260 - 5320 MHz	12.93	0.75	0.10		0.72
NII	5.5 GHz WLAN	5500 - 5700 MHz	11.45	0.75	0.10		0.45
DSS/DTS	Bluetooth	2402 - 2480 MHz	7.72		N/A		
Simultaneous SAR per KDB 690783 D01v01r02:				1.55	1.08	1.35	4.00

Note: Powers in the above table represent output powers for the SAR test configurations and may not represent the highest output powers for all configurations for each mode.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

Randy Ortanez
 President



FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: OY1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 1 of 91

T A B L E O F C O N T E N T S

1	DEVICE UNDER TEST	3
2	LTE INFORMATION	11
3	INTRODUCTION	12
4	DOSIMETRIC ASSESSMENT	13
5	DEFINITION OF REFERENCE POINTS	14
6	TEST CONFIGURATION POSITIONS FOR HANDSETS	15
7	RF EXPOSURE LIMITS	19
8	FCC MEASUREMENT PROCEDURES.....	20
9	RF CONDUCTED POWERS.....	25
10	SYSTEM VERIFICATION.....	53
11	SAR DATA SUMMARY	58
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	74
13	SAR MEASUREMENT VARIABILITY	83
14	EQUIPMENT LIST.....	85
15	MEASUREMENT UNCERTAINTIES	87
16	CONCLUSION.....	89
17	REFERENCES	90
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: SAR TEST SETUP PHOTOGRAPHS		

FCC ID: PY7PM-0430		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset	Page 2 of 91	

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.5 MHz
LTE Band 2 (PCS)	Data	1850.7 - 1909.3 MHz
LTE Band 4 (AWS)	Data	1710.7 - 1754.3 MHz
LTE Band 5 (Cell)	Data	824.7 - 848.3 MHz
LTE Band 17	Data	706.5 - 713.5 MHz
LTE Band 7	Data	2502.5 - 2567.5 MHz
2.4 GHz WLAN	Data	2412 - 2462 MHz
5.8 GHz WLAN	Data	5745 - 5825 MHz
5.2 GHz WLAN	Data	5180 - 5240 MHz
5.3 GHz WLAN	Data	5260 - 5320 MHz
5.5 GHz WLAN	Data	5500 - 5700 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz

1.2 Power Reduction for SAR

This device utilizes power reduction under some portable hotspot conditions (tethering) for SAR compliance. There is power reduction for GSM/GPRS/EDGE 1900, UMTS FDD 4, UMTS FDD 2, LTE Band 4, LTE Band 2, and LTE Band 7. There is no power reduction for GSM/GPRS/EDGE 850, UMTS FDD 5, LTE Band 5, LTE Band 17 and WLAN modes. The reduced powers were confirmed via conducted power measurements at the RF port (see Section 9). Detailed description of the hotspot power reduction mechanism is included in the operational description.

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 3 of 91

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v05.

Maximum Power with hotspot mode inactive:

Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 850	Maximum	33.6	33.6	31.6	30.6	29.6	28.0	26.0	25.0	24.0
	Nominal	33.0	33.0	31.0	30.0	29.0	27.0	25.0	24.0	23.0
GSM/GPRS/EDGE 1900	Maximum	30.6	30.6	28.5	27.5	26.5	27.0	25.0	24.0	23.0
	Nominal	30.0	30.0	28.0	27.0	26.0	26.0	24.0	23.0	22.0

Mode / Band		Modulated Average (dBm)			
		3GPP RMC	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 5 (850 MHz)	Maximum	24.5	24.5	24.5	24.5
	Nominal	24.0	24.0	24.0	24.0
UMTS Band 4 (1750 MHz)	Maximum	24.5	24.5	24.5	24.5
	Nominal	24.0	24.0	24.0	24.0
UMTS Band 2 (1900 MHz)	Maximum	24.0	24.0	24.0	24.0
	Nominal	23.5	23.5	23.5	23.5

Mode / Band		Modulated Average (dBm)
LTE Band 2 (PCS)	Maximum	23.8
	Nominal	23.0
LTE Band 4 (AWS)	Maximum	23.6
	Nominal	23.0
LTE Band 5 (Cell)	Maximum	23.1
	Nominal	22.5
LTE Band 17	Maximum	23.6
	Nominal	23.0
LTE Band 7	Maximum	23.8
	Nominal	23.0

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 4 of 91

Mode / Band		Modulated Average (dBm)		
IEEE 802.11b (2.4 GHz)	Channel	1	2-10	11
	Maximum	12.0	14.0	12.0
	Nominal	11.3	13.3	11.3
IEEE 802.11g (2.4 GHz)	Channel	1	2-10	11
	Maximum	11.8	13.8	11.8
	Nominal	11.1	13.1	11.1
IEEE 802.11n (2.4 GHz)	Channel	1	2-10	11
	Maximum	11.8	13.8	11.8
	Nominal	11.1	13.1	11.1
IEEE 802.11a (5 GHz 6Mbps - 18Mbps)	Channel	36-64	100-140	149-165
	Maximum	13.5	11.5	13.5
	Nominal	12.8	10.8	12.8
IEEE 802.11a (5 GHz 24Mbps - 54Mbps)	Channel	36-64	100-140	149-165
	Maximum	12.5	11.5	12.5
	Nominal	11.8	10.8	11.8
IEEE 802.11n (5GHz HT20)	Channel	36-64	100-140	149-165
	Maximum	12.0	11.0	12.0
	Nominal	11.3	10.3	11.3
IEEE 802.11n (5GHz HT40)	Channel	38-62	102-134	151-159
	Maximum	11.8	11.0	11.8
	Nominal	11.1	10.3	11.1
IEEE 802.11ac (5GHz 80MHz BW MCS0 - MCS3)	Channel	42-58	106-122	155
	Maximum	11.0	11.0	11.8
	Nominal	10.3	10.3	11.1
IEEE 802.11ac (5 GHz 80MHz BW MCS4 - MCS7)	Channel	42-58	106-122	155
	Maximum	10.5	10.5	10.5
	Nominal	9.8	9.8	9.8
Bluetooth	Maximum	9.5		
	Nominal	6.0		

Reduced Power with hotspot mode activated:


Mode / Band	Voice (dBm)	Burst Average GMSK (dBm)				Burst Average 8-PSK (dBm)				
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
GSM/GPRS/EDGE 1900	Maximum	29.0	29.0	27.0	25.5	24.5	27.0	25.0	24.0	23.0
	Nominal	27.3	27.3	25.3	23.8	22.8	26.0	24.0	23.0	22.0

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 5 of 91

Mode / Band		Modulated Average (dBm)			
		3GPP RMC	3GPP HSDPA	3GPP HSUPA	3GPP DC-HSDPA
UMTS Band 4 (1750 MHz)	Maximum	21.5	21.5	21.5	21.5
	Nominal	20.0	20.0	20.0	20.0
UMTS Band 2 (1900 MHz)	Maximum	21.0	21.0	21.0	21.0
	Nominal	19.5	19.5	19.5	19.5

Mode / Band		Modulated Average (dBm)
LTE Band 2 (PCS)	Maximum	21.0
	Nominal	19.2
LTE Band 4 (AWS)	Maximum	21.5
	Nominal	19.9
LTE Band 7	Maximum	20.5
	Nominal	18.7

1.4 DUT Antenna Locations

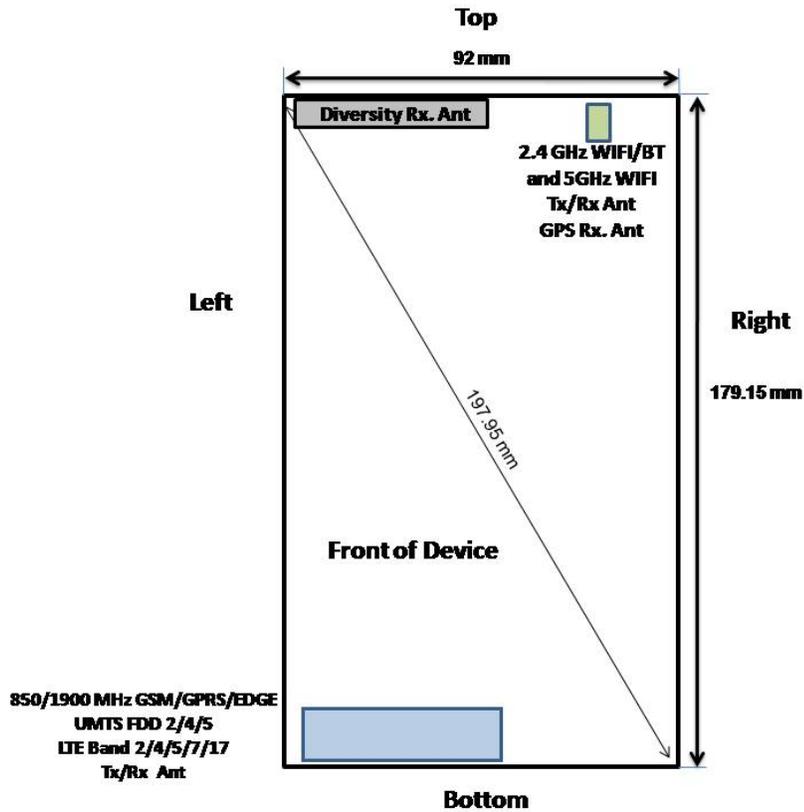

Notes:

1. Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC Filing.
2. Because the diagonal distance of this device is >160 mm, it is considered a "phablet".

Figure 1-1
DUT Antenna Locations

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 6 of 91


**Table 1-1
Sides for SAR Testing for Hotspot and Extremity Exposure Conditions**

Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	No	Yes
GPRS 1900	Yes	Yes	No	Yes	No	Yes
UMTS 850	Yes	Yes	No	Yes	No	Yes
UMTS 1900	Yes	Yes	No	Yes	No	Yes
UMTS 1750	Yes	Yes	No	Yes	No	Yes
LTE Band 2 (PCS)	Yes	Yes	No	Yes	No	Yes
LTE Band 4 (AWS)	Yes	Yes	No	Yes	No	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	No	Yes
LTE Band 17	Yes	Yes	No	Yes	No	Yes
LTE Band 7	Yes	Yes	No	Yes	No	Yes
2.4 GHz WLAN	Yes	Yes	Yes	No	Yes	No
5 GHz WLAN	Yes	Yes	Yes	No	Yes	No

Note: Particular DUT edges were not required to be evaluated for Wireless Router or Hand SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v01 guidance, page 2 and FCC KDB Publication 865664 D04v01r01. When the wireless router mode is enabled, all 5 GHz bands are disabled.

1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device. Therefore, all SAR tests were performed with the NFC antenna already incorporated.

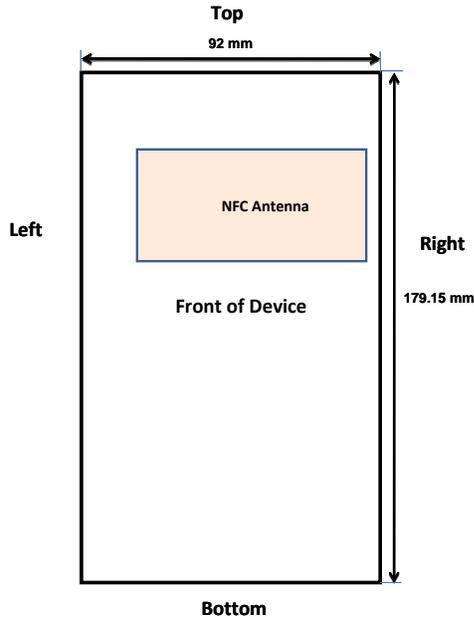

**Figure 1-2
NFC Antenna Locations**

FCC ID: PY7PM-0430		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 7 of 91

1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D05v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v05 3) procedures.

**Table 1-2
Simultaneous Transmission Scenarios**

No.	Capable Transmit Configurations	Head	Body-Worn Accessory	Hot Spot	Extremity
		IEEE 1528, Supp C	Supp C	FCC KDB 941225 D06 edges/sides	FCC KDB 648474 D04 edges/sides
1	GSM 850/1900 MHz Voice + WiFi 2.4 GHz	Yes	15mm	N/A	Yes
2	UMTS FDD 2/4/5 Voice + WiFi 2.4 GHz	Yes	15mm	N/A	Yes
3	850/1900 MHz GPRS Data + WiFi 2.4 GHz	N/A	N/A	Yes	Yes
4	UMTS FDD 2/4/5 Data + WiFi 2.4 GHz	Yes	15mm	Yes	Yes
5	LTE B2/4/5/7/17 Data + WiFi 2.4 GHz	Yes*	15mm*	Yes	Yes
6	GSM 850/1900 MHz Voice + 2.4 GHz Bluetooth	N/A	15mm	N/A	Yes
7	UMTS FDD 2/4/5 Voice + 2.4 GHz Bluetooth	N/A	15mm	N/A	Yes
8	LTE B2/4/5/7/17 Data + 2.4 GHz Bluetooth	N/A	15mm*	N/A	Yes
9	GSM 850/1900 MHz Voice + WiFi 5 GHz	Yes	15mm	N/A	Yes
10	UMTS FDD 2/4/5 Voice + WiFi 5 GHz	Yes	15mm	N/A	Yes
11	850/1900 MHz GPRS/EDGE Data + WiFi 5GHz	N/A	N/A	N/A	Yes
12	UMTS FDD 2/4/5 Data + WIFI 5 GHz	N/A	N/A	N/A	Yes
13	LTE B2/4/5/7/17 Data + WiFi 5 GHz	N/A	N/A	N/A	Yes
14	All Voice + LTE	N/A	N/A	N/A	N/A
15	All Voice + WIFI + LTE	N/A	N/A	N/A	N/A

Notes:

- (*) = for VOIP 3rd party applications possibly installed and used by the end-user
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, the only new simultaneous transmission scenarios involving WIFI direct or WIFI display are for hand-held operations only.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 8 of 91

1.7 SAR Test Exclusions Applied

(A) WIFI/BT

Since Wireless Router operations are not allowed by the chipset firmware using 5 GHz WIFI, only 2.4 GHz WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v01.

Per FCC KDB 447498 D01v05, the SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, Bluetooth SAR was not required; $[(9/15) * \sqrt{2.441}] = 0.9 < 3.0$. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB 447498 D01v05r01, the SAR exclusion threshold for 10g Extremity SAR for distances <50mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Separation Dist(mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 7.5$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, Bluetooth SAR was not required; $[(9/5) * \sqrt{2.441}] = 2.8 < 7.5$. Per KDB Publication 447498 D01v05r01, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB Publication 648474 D03-D04, this device is considered a "phablet" since its diagonal distance is greater than 160 mm. Therefore hand SAR tests are required. Because wireless router operations are not supported for 5 GHz WIFI, hand SAR was evaluated for 5 GHz WIFI. However, hand SAR was not evaluated for 2.4 GHz WIFI since Hotspot SAR for 2.4 GHz WIFI when scaled up to the maximum output power tolerances is < 1.2 W/kg. A 3mm Phablet SAR test distance was used based on a FCC KDB inquiry and is established according to the specific conditions applicable to the device.

This device supports 20 MHz and 40 MHz Bandwidths for IEEE 802.11n for 5 GHz WIFI only. IEEE 802.11n was not evaluated for SAR since the average output power of 20 MHz and 40 MHz bandwidths was not more than 0.25 dB higher than the average output power of IEEE 802.11a.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 1 Tx antenna output
- d) 256 QAM is supported
- e) No new 5 GHz channels

Full SAR evaluations for all IEEE 802.11ac configurations were not required since the average output power was not more than 0.25 dB higher than IEEE 802.11a mode. IEEE 802.11ac was evaluated for the highest IEEE 802.11a position in each 5 GHz band and exposure condition.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 9 of 91

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS Data.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02.

Per FCC KDB Publication 648474 D03-D04, this device is considered a "phablet" since its diagonal distance is greater than 160 mm. Therefore hand SAR tests are required. When hotspot mode applies, 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g SAR scaled up to the maximum output power tolerances > 1.2 W/kg. A 3mm Phablet SAR test distance was used based on a FCC KDB inquiry and is established according to the specific conditions applicable to the device.

1.8 Guidance Applied

- FCC OET Bulletin 65 Supplement C [June 2001]
- IEEE 1528-2003
- FCC KDB Publication 941225 D01-D06 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v01r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v05 (General SAR Guidance)
- FCC KDB Publication 865664 D01-D02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D03-D04 (Phablet Procedures)
- April 2013 TCB Workshop Notes (IEEE 802.11ac)

1.9 Device Serial Numbers

Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

	Head Serial Number	Body-Worn Serial Number	Hotspot Serial Number	Extremity Serial Number
GSM/GPRS/EDGE 850	8628	8628	8628	-
GSM/GPRS/EDGE 1900	8624	8628	8624	8624
UMTS 850	8613	8617	8617	-
UMTS 1900	8613	8617	8617	8624
UMTS 1750	8613	8617	8613	8624
LTE Band 2 (PCS)	8620	8620	8620	8694
LTE Band 4 (AWS)	8620	8620	8620	8694
LTE Band 5 (Cell)	8620	8620	8620	-
LTE Band 17	8620	8620	8620	-
LTE Band 7	8620	8620	8620	8925
2.4 GHz WLAN	6717	6717	6717	-
5 GHz WLAN	3037	3039	-	3039

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 10 of 91

2

LTE INFORMATION

LTE Information			
FCC ID	PY7PM-0430		
Form Factor	Portable Handset		
Frequency Range of each LTE transmission band	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)		
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)		
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)		
	LTE Band 17 (706.5 - 713.5 MHz)		
	LTE Band 7 (2502.5 - 2567.5 MHz)		
Channel Bandwidths	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz		
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz		
	LTE Band 17: 5 MHz, 10 MHz		
	LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz		
Channel Numbers and Frequencies (MHz)	Low	Mid	High
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880 (18900)	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880 (18900)	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880 (18900)	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)	1880 (18900)	1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880 (18900)	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)	1880 (18900)	1900 (19100)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	1732.5 (20175)	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	1732.5 (20175)	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	1732.5 (20175)	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)	1732.5 (20175)	1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	1732.5 (20175)	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)	1732.5 (20175)	1745 (20300)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)	836.5 (20525)	844 (20600)
LTE Band 17: 5 MHz	706.5 (23755)	710 (23790)	713.5 (23825)
LTE Band 17: 10 MHz	709 (23780)	710 (23790)	711 (23800)
LTE Band 7: 5 MHz	2502.5 (20775)	2535 (21100)	2567.5 (21425)
LTE Band 7: 10 MHz	2505 (20800)	2535 (21100)	2565 (21400)
LTE Band 7: 15 MHz	2507.5 (20825)	2535 (21100)	2562.5 (21375)
LTE Band 7: 20 MHz	2510 (20850)	2535 (21100)	2560 (21350)
UE Category	4		
Modulations Supported in UL	QPSK, 16QAM		
LTE Voice available?	NO		
Hotspot with LTE+WIFI	YES		
Hotspot with LTE+WIFI active with 1XVoice sessions?	NO		
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES		
A-MPR (Additional MPR) disabled for SAR Testing?	YES		

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 11 of 91

3 INTRODUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [24]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 12 of 91

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01 (See Table 4-1).
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01 (See Table 4-1). On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASy manual online for more details):
 - a. The data was extrapolated to the surface of the outer-shell of the phantom. The combined distance extrapolated was the combined distance from the center of the dipoles 2.7mm away from the tip of the probe housing plus the 1.2 mm distance between the surface and the lowest measuring point. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.

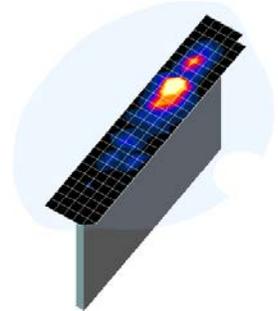


Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 13 of 91

5

DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].

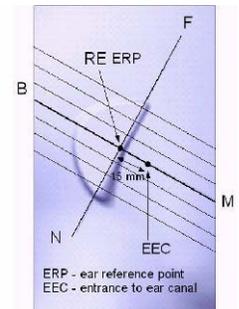


Figure 5-1
Close-Up Side view of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

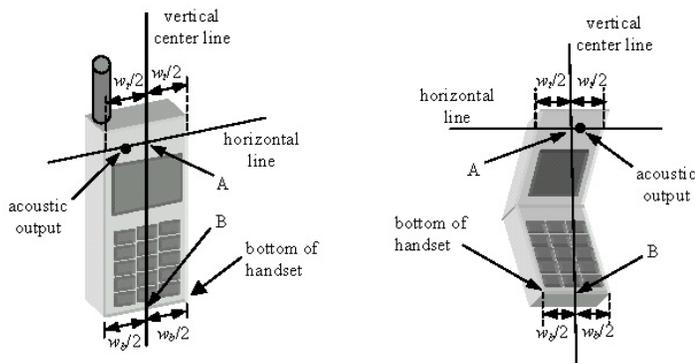


Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 14 of 91

6 TEST CONFIGURATION POSITIONS FOR HANDSETS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

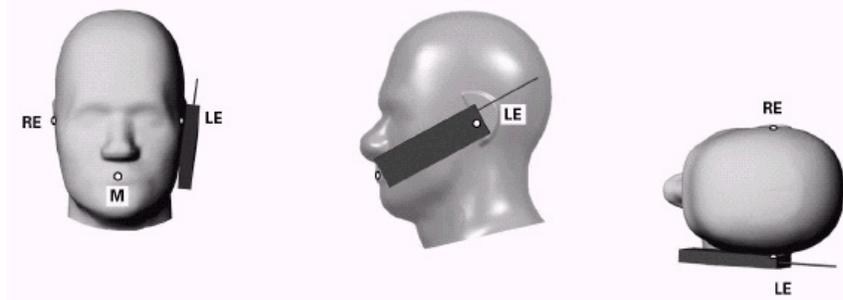


Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 15 of 91

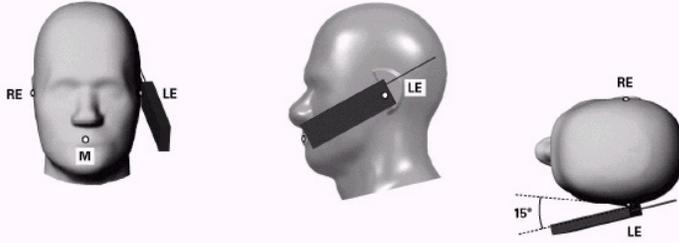


Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 6-3 Side view w/ relevant markings

6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04_v01. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

The latest IEEE 1528 committee developments propose the usage of a tilted phantom when the antenna of the phone is mounted at the bottom or in all cases the peak absorption is in the chin region. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed individually from the table for emptying and cleaning.




Figure 6-4 Twin SAM Chin20

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 16 of 91

6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-5). Per FCC KDB Publication 648474 D04v01, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v05 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

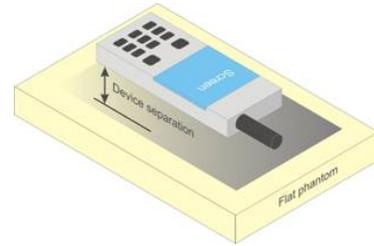


Figure 6-5
Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 17 of 91

6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 44798 D01v05 should be applied to determine SAR test requirements.

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC minitables that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04 v01r01DR04 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna ≤ 25 mm from that surface or edge, in direct contact with the phantom, for 10-g SAR. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g SAR scaled up to the maximum output power tolerances > 1.2 W/kg. A 3mm Phablet SAR test distance was used based on a FCC KDB inquiry and is established according to the specific conditions applicable to the device.

6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

This device utilizes power reduction for some bands/modes during portable hotspot (tethering) operations for SAR compliance. A detailed description of the hotspot power reduction mechanism is included in the operational description.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 18 of 91

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 19 of 91

8 FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v05, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r02.

8.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01 "SAR Measurement Procedures for 3G Devices" v02, October 2007.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

8.3 SAR Measurement Conditions for UMTS

8.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1s".

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.3.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all "1s". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 20 of 91

8.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”.

8.3.4 SAR Measurements for Handsets with Rel 5 HSDPA

Body SAR for HSDPA is not required for handsets with HSDPA capabilities when the maximum average output power of each RF channel with HSDPA active is less than 0.25 dB higher than that measured without HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit. Otherwise, SAR is measured for HSDPA, using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration measured in 12.2 kbps RMC without HSDPA, on the maximum output channel with the body exposure configuration that resulted in the highest SAR in 12.2 kbps RMC mode for that RF channel.

The H-set used in FRC for HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HSPDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the applicable H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the FRC for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 2 ms to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors of $\beta_c=9$ and $\beta_d=15$, and power offset parameters of $\Delta_{ACK} = \Delta_{NACK} = 5$ and $\Delta_{CQI}=2$ is used. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the FRC.

Sub-Test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Rightarrow A_{HS} = \beta_{HS}/\beta_c = 30/15 \Rightarrow \beta_{HS} = 30/15 * \beta_c$.
 Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 8$ ($A_{HS} = 30/15$) with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 7$ ($A_{HS} = 24/15$) with $\beta_{HS} = 24/15 * \beta_c$.
 Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Figure 8-1
Table C.10.1.4 of TS 234.121-1

8.3.5 SAR Measurements for Handsets with Rel 6 HSUPA

Body SAR for HSUPA is not required when the maximum average output of each RF channel with HSUPA/HSDPA active is less than 0.25 dB higher than as measured without HSUPA/HSDPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit. Otherwise SAR is measured on the maximum output channel for the body exposure configuration produced highest SAR in 12.2 kbps RMC for that RF channel, using the additional procedures under “Release 6 HSPA data devices”

Head SAR for VOIP operations under HSPA is not required when maximum average output of each RF channel with HSPA is less than 0.25 dB higher than as measured using 12.2 kbps RMC. Otherwise SAR is measured using same HSPA configuration as used for body SAR.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 21 of 91

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{is}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{d1}: 47/15$ $\beta_{ed}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{is} = \beta_{is}/\beta_c = 30/15 \Leftrightarrow \beta_{is} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{is}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

8.3.6 SAR Measurement Conditions for DC-HSDPA

SAR test exclusion for DC-HSDPA devices is determined by power measurements according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to qualify for SAR test exclusion. DC-HSDPA uplink maximum output power measurements using the four Rel. 5 HSDPA subtests in Table C.10.1.4 of TS 234.121-1 is required.

When the maximum average output power of each RF channel with DC-HSDPA active is $\leq 1/4$ dB higher than that measured using 12.2 kbps RMC, or the maximum reported SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit, SAR evaluation for DC-HSDPA is not required.

8.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.

8.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.4.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 22 of 91

8.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r01:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 23 of 91

8.5 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g/n/ac transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v01r02 for more details.

8.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

8.5.2 Frequency Channel Configurations [27]

For 2.4 GHz, the highest average RF output power channel between the low, mid and high channel at the lowest data rate was selected for SAR evaluation in 802.11b mode. 802.11g/n modes and higher data rates for 802.11b were additionally evaluated for SAR if the output power of the respective mode was 0.25 dB or higher than the powers of the SAR configurations tested in the 802.11b mode.

For 5 GHz, the highest average RF output power channel across the default test channels at the lowest data rate was selected for SAR evaluation in 802.11a. When the adjacent channels are higher in power than the default channels, these "required channels" were considered instead of the default channels for SAR testing. 802.11n modes and higher data rates for 802.11a/n were evaluated only if the respective mode was 0.25 dB or higher than the 802.11a mode. 802.11ac SAR was evaluated for highest 802.11a configuration in each 5 GHz band and each exposure condition. 802.11ac modes were additionally evaluated for SAR if the output power for the respective mode was more than 0.25 dB higher than powers of 802.11a modes.

If the maximum extrapolated peak SAR of the zoom scan for the highest output channel was less than 1.6 W/kg and if the 1g averaged SAR was less than 0.8 W/kg, SAR testing was not required for the other test channels in the band.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 24 of 91

9 RF CONDUCTED POWERS

9.1 GSM Conducted Powers

Table 9-1
Maximum GSM/GPRS/EDGE Average RF Conducted Powers
(Representing Hotspot Mode Inactive)

		Maximum Burst-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	32.82	32.86	31.18	30.16	29.21	27.23	25.06	24.11	23.00
	190	33.03	33.09	31.45	30.25	29.32	27.31	25.16	24.34	23.17
	251	33.01	33.07	31.25	30.21	29.23	27.21	25.05	24.15	22.99
GSM 1900	512	30.23	30.14	28.04	27.41	26.30	25.36	23.78	22.86	21.97
	661	30.31	30.21	28.08	27.35	26.35	25.38	23.81	22.91	22.06
	810	30.47	30.42	28.30	27.42	26.50	25.65	23.26	22.39	21.48

		Calculated Maximum Frame-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	23.79	23.83	25.16	25.90	26.20	18.20	19.04	19.85	19.99
	190	24.00	24.06	25.43	25.99	26.31	18.28	19.14	20.08	20.16
	251	23.98	24.04	25.23	25.95	26.22	18.18	19.03	19.89	19.98
GSM 1900	512	21.20	21.11	22.02	23.15	23.29	16.33	17.76	18.60	18.96
	661	21.28	21.18	22.06	23.09	23.34	16.35	17.79	18.65	19.05
	810	21.44	21.39	22.28	23.16	23.49	16.62	17.24	18.13	18.47

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 25 of 91

**Table 9-2
Reduced GSM/GPRS/EDGE Average RF Conducted Powers
(Representing Hotspot Mode Active)**


		Maximum Burst-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 1900	512	27.95	28.01	26.00	24.20	23.12	25.40	25.00	23.00	21.67
	661	27.96	27.99	26.05	24.33	23.16	25.42	24.42	22.48	21.63
	810	28.14	28.22	26.18	24.47	23.35	25.00	23.84	22.05	21.07

		Calculated Maximum Frame-Averaged Output Power								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 1900	512	18.92	18.98	19.98	19.94	20.11	16.37	18.98	18.74	18.66
	661	18.93	18.96	20.03	20.07	20.15	16.39	18.40	18.22	18.62
	810	19.11	19.19	20.16	20.21	20.34	15.97	17.82	17.79	18.06

Notes:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- The bolded GPRS modes were selected for SAR testing according to the highest frame-averaged output power table according to KDB 941225 D03v01.
- GPRS (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8-PSK modulation do not have an impact on output power.
- This device does not support evolved EDGE (eEDGE).
- There is no power reduction for GSM/GPRS/EDGE 850.

GSM Class: B
GPRS Multislot class: 33 (Max 4 Tx uplink slots)
EDGE Multislot class: 33 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A

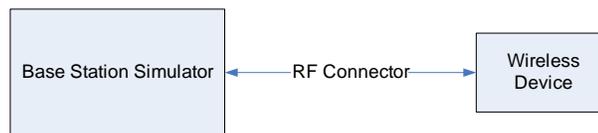

**Figure 9-1
Power Measurement Setup**

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 26 of 91

9.2 UMTS Conducted Powers

Table 9-3
Maximum UMTS Average RF Conducted Powers
(Representing Hotspot Mode Inactive)

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1862	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	24.46	24.47	24.48	23.96	24.19	24.27	23.67	23.62	23.55	-
99		12.2 kbps AMR	24.48	24.34	24.21	23.90	23.72	23.84	23.78	23.64	23.64	-
6	HSDPA	Subtest 1	24.26	24.44	24.43	24.14	24.23	24.26	23.73	23.58	23.67	0
6		Subtest 2	24.50	24.35	24.48	24.16	24.25	24.24	23.69	23.64	23.68	0
6		Subtest 3	24.27	24.06	24.18	23.79	23.80	23.80	23.23	23.14	23.15	0.5
6		Subtest 4	24.23	24.02	24.12	23.65	23.50	23.62	23.16	23.19	23.08	0.5
6	HSUPA	Subtest 1	23.73	24.17	23.58	23.37	23.84	24.00	23.33	23.13	23.18	0
6		Subtest 2	23.62	23.59	23.55	21.97	21.87	22.05	21.94	21.38	21.43	2
6		Subtest 3	23.57	23.55	23.64	23.06	23.48	23.17	22.55	22.61	22.92	1
6		Subtest 4	23.63	23.58	23.52	23.01	22.91	22.92	22.16	22.11	22.22	2
6		Subtest 5	23.58	24.00	23.99	23.98	23.61	23.20	22.53	22.64	23.08	0
8	DC-HSDPA	Subtest 1	24.38	24.42	24.49	24.13	24.05	23.86	23.62	23.77	23.70	0
8		Subtest 2	24.39	24.41	24.49	24.01	24.06	23.94	23.64	23.63	23.76	0
8		Subtest 3	23.93	24.00	23.85	23.49	23.55	23.52	23.31	23.17	23.31	0.5
8		Subtest 4	23.84	23.99	23.85	23.69	23.44	23.25	23.29	23.28	23.24	0.5

Table 9-4
Reduced UMTS Average RF Conducted Powers
(Representing Hotspot Mode Active)

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1862	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	21.27	21.28	21.46	20.94	20.96	20.85	-
99		12.2 kbps AMR	21.33	21.32	21.43	21.00	20.90	20.82	-
6	HSDPA	Subtest 1	21.31	21.47	21.50	20.97	20.83	20.91	0
6		Subtest 2	21.43	21.41	21.43	20.92	20.80	20.92	0
6		Subtest 3	20.89	20.86	20.94	20.43	20.49	20.50	0.5
6		Subtest 4	20.76	20.85	20.92	20.38	20.43	20.27	0.5
6	HSUPA	Subtest 1	21.17	21.19	21.37	20.94	20.94	20.94	0
6		Subtest 2	19.30	19.42	19.31	18.92	18.92	18.92	2
6		Subtest 3	21.38	20.52	20.82	20.26	20.37	20.31	1
6		Subtest 4	20.78	19.88	19.93	19.84	19.73	19.87	2
6		Subtest 5	21.28	20.87	21.19	20.64	20.75	20.83	0
8	DC-HSDPA	Subtest 1	20.66	20.55	20.47	20.66	20.56	20.52	0
8		Subtest 2	20.78	20.56	20.49	20.80	20.70	20.59	0
8		Subtest 3	20.12	20.08	19.94	20.08	20.07	19.85	0.5
8		Subtest 4	20.19	20.10	19.88	20.22	20.06	19.83	0.5

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 27 of 91

Notes:

- UMTS SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg. DC-HSDPA SAR was not required since SAR was less than 1.2 W/kg.
- DC-HSDPA considerations
 - 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
 - H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
 - Per FCC KDB Publication 941225 D02, since the maximum average output power of each RF channel with DC-HSDPA active is $\leq \frac{1}{4}$ dB higher than that measured using 12.2 kbps RMC, or the maximum reported SAR for 12.2 kbps RMC is $\leq 75\%$ of the SAR limit, SAR evaluation for DC-HSDPA is not required.
 - The DUT supports UE category 24 for HSDPA
- There is no power reduction for UMTS Band 5.

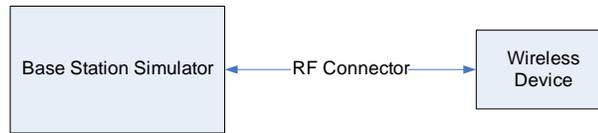


Figure 9-2
Power Measurement Setup

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 28 of 91

9.3 LTE Conducted Powers

9.3.1 LTE Band 2 (PCS)

LTE Band 2 bandedge conducted power has been reduced in accordance with 3GPP TS36.521-1. The power back-off at bandedge is applied if the entire allocated UL RB bandwidth is within 4 MHz of the bandedge.

Table 9-5
Maximum LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1860	18700	20	QPSK	1	0	23.11	0	0
	1860	18700	20	QPSK	1	50	23.11	0	0
	1860	18700	20	QPSK	1	99	23.27	0	0
	1860	18700	20	QPSK	50	0	22.05	1	0-1
	1860	18700	20	QPSK	50	25	22.13	1	0-1
	1860	18700	20	QPSK	50	50	22.08	1	0-1
	1860	18700	20	QPSK	100	0	22.03	1	0-1
	1860	18700	20	16QAM	1	0	22.26	1	0-1
	1860	18700	20	16QAM	1	50	22.35	1	0-1
	1860	18700	20	16QAM	1	99	22.46	1	0-1
	1860	18700	20	16QAM	50	0	21.08	2	0-2
	1860	18700	20	16QAM	50	25	21.12	2	0-2
1860	18700	20	16QAM	50	50	21.07	2	0-2	
1860	18700	20	16QAM	100	0	21.06	2	0-2	
Mid	1880.0	18900	20	QPSK	1	0	23.16	0	0
	1880.0	18900	20	QPSK	1	50	23.25	0	0
	1880.0	18900	20	QPSK	1	99	23.23	0	0
	1880.0	18900	20	QPSK	50	0	22.06	1	0-1
	1880.0	18900	20	QPSK	50	25	22.09	1	0-1
	1880.0	18900	20	QPSK	50	50	22.02	1	0-1
	1880.0	18900	20	QPSK	100	0	22.05	1	0-1
	1880.0	18900	20	16QAM	1	0	22.40	1	0-1
	1880.0	18900	20	16QAM	1	50	22.44	1	0-1
	1880.0	18900	20	16QAM	1	99	22.45	1	0-1
	1880.0	18900	20	16QAM	50	0	21.07	2	0-2
	1880.0	18900	20	16QAM	50	25	21.06	2	0-2
	1880.0	18900	20	16QAM	50	50	20.94	2	0-2
	1880.0	18900	20	16QAM	100	0	21.05	2	0-2
High	1900	19100	20	QPSK	1	0	23.09	0	0
	1900	19100	20	QPSK	1	50	23.22	0	0
	1900	19100	20	QPSK	1	99	21.69	0	0
	1900	19100	20	QPSK	50	0	22.07	1	0-1
	1900	19100	20	QPSK	50	25	22.04	1	0-1
	1900	19100	20	QPSK	50	50	21.98	1	0-1
	1900	19100	20	QPSK	100	0	22.08	1	0-1
	1900	19100	20	16QAM	1	0	22.33	1	0-1
	1900	19100	20	16QAM	1	50	22.47	1	0-1
	1900	19100	20	16QAM	1	99	20.90	1	0-1
	1900	19100	20	16QAM	50	0	21.11	2	0-2
	1900	19100	20	16QAM	50	25	21.12	2	0-2
	1900	19100	20	16QAM	50	50	21.05	2	0-2
	1900	19100	20	16QAM	100	0	21.14	2	0-2

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 29 of 91

Table 9-6
Maximum LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1857.5	18675	15	QPSK	1	0	23.14	0	0
	1857.5	18675	15	QPSK	1	36	23.16	0	0
	1857.5	18675	15	QPSK	1	74	23.17	0	0
	1857.5	18675	15	QPSK	36	0	22.13	1	0-1
	1857.5	18675	15	QPSK	36	18	22.10	1	0-1
	1857.5	18675	15	QPSK	36	37	22.11	1	0-1
	1857.5	18675	15	QPSK	75	0	22.06	1	0-1
	1857.5	18675	15	16QAM	1	0	22.41	1	0-1
	1857.5	18675	15	16QAM	1	36	22.40	1	0-1
	1857.5	18675	15	16QAM	1	74	22.39	1	0-1
	1857.5	18675	15	16QAM	36	0	21.23	2	0-2
	1857.5	18675	15	16QAM	36	18	21.14	2	0-2
	1857.5	18675	15	16QAM	36	37	21.14	2	0-2
	1857.5	18675	15	16QAM	75	0	21.10	2	0-2
	1857.5	18675	15	16QAM	75	0	21.10	2	0-2
Mid	1880.0	18900	15	QPSK	1	0	23.13	0	0
	1880.0	18900	15	QPSK	1	36	23.10	0	0
	1880.0	18900	15	QPSK	1	74	23.19	0	0
	1880.0	18900	15	QPSK	36	0	21.98	1	0-1
	1880.0	18900	15	QPSK	36	18	22.01	1	0-1
	1880.0	18900	15	QPSK	36	37	22.00	1	0-1
	1880.0	18900	15	QPSK	75	0	21.99	1	0-1
	1880.0	18900	15	16QAM	1	0	21.74	1	0-1
	1880.0	18900	15	16QAM	1	36	21.82	1	0-1
	1880.0	18900	15	16QAM	1	74	21.87	1	0-1
	1880.0	18900	15	16QAM	36	0	20.91	2	0-2
	1880.0	18900	15	16QAM	36	18	20.94	2	0-2
	1880.0	18900	15	16QAM	36	37	20.96	2	0-2
	1880.0	18900	15	16QAM	75	0	20.98	2	0-2
	1880.0	18900	15	16QAM	75	0	20.98	2	0-2
High	1902.5	19125	15	QPSK	1	0	23.05	0	0
	1902.5	19125	15	QPSK	1	36	23.07	0	0
	1902.5	19125	15	QPSK	1	74	21.69	0	0
	1902.5	19125	15	QPSK	36	0	22.12	1	0-1
	1902.5	19125	15	QPSK	36	18	22.11	1	0-1
	1902.5	19125	15	QPSK	36	37	22.02	1	0-1
	1902.5	19125	15	QPSK	75	0	21.93	1	0-1
	1902.5	19125	15	16QAM	1	0	21.77	1	0-1
	1902.5	19125	15	16QAM	1	36	21.82	1	0-1
	1902.5	19125	15	16QAM	1	74	20.93	1	0-1
	1902.5	19125	15	16QAM	36	0	21.15	2	0-2
	1902.5	19125	15	16QAM	36	18	21.19	2	0-2
	1902.5	19125	15	16QAM	36	37	21.14	2	0-2
	1902.5	19125	15	16QAM	75	0	21.13	2	0-2
	1902.5	19125	15	16QAM	75	0	21.13	2	0-2

Table 9-7
Maximum LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1855	18650	10	QPSK	1	0	23.00	0	0
	1855	18650	10	QPSK	1	25	23.05	0	0
	1855	18650	10	QPSK	1	49	23.00	0	0
	1855	18650	10	QPSK	25	0	22.14	1	0-1
	1855	18650	10	QPSK	25	12	22.16	1	0-1
	1855	18650	10	QPSK	25	25	22.18	1	0-1
	1855	18650	10	QPSK	50	0	22.16	1	0-1
	1855	18650	10	16QAM	1	0	22.36	1	0-1
	1855	18650	10	16QAM	1	25	22.44	1	0-1
	1855	18650	10	16QAM	1	49	22.41	1	0-1
	1855	18650	10	16QAM	25	0	21.25	2	0-2
	1855	18650	10	16QAM	25	12	21.24	2	0-2
	1855	18650	10	16QAM	25	25	21.20	2	0-2
	1855	18650	10	16QAM	50	0	21.19	2	0-2
	1855	18650	10	16QAM	50	0	21.19	2	0-2
Mid	1880.0	18900	10	QPSK	1	0	23.12	0	0
	1880.0	18900	10	QPSK	1	25	23.18	0	0
	1880.0	18900	10	QPSK	1	49	23.14	0	0
	1880.0	18900	10	QPSK	25	0	22.00	1	0-1
	1880.0	18900	10	QPSK	25	12	22.10	1	0-1
	1880.0	18900	10	QPSK	25	25	22.04	1	0-1
	1880.0	18900	10	QPSK	50	0	22.05	1	0-1
	1880.0	18900	10	16QAM	1	0	22.37	1	0-1
	1880.0	18900	10	16QAM	1	25	22.36	1	0-1
	1880.0	18900	10	16QAM	1	49	22.38	1	0-1
	1880.0	18900	10	16QAM	25	0	21.09	2	0-2
	1880.0	18900	10	16QAM	25	12	21.10	2	0-2
	1880.0	18900	10	16QAM	25	25	21.12	2	0-2
	1880.0	18900	10	16QAM	50	0	21.00	2	0-2
	1880.0	18900	10	16QAM	50	0	21.00	2	0-2
High	1905	19150	10	QPSK	1	0	23.05	0	0
	1905	19150	10	QPSK	1	25	22.94	0	0
	1905	19150	10	QPSK	1	49	21.73	0	0
	1905	19150	10	QPSK	25	0	22.02	1	0-1
	1905	19150	10	QPSK	25	12	22.02	1	0-1
	1905	19150	10	QPSK	25	25	22.03	1	0-1
	1905	19150	10	QPSK	50	0	21.99	1	0-1
	1905	19150	10	16QAM	1	0	22.49	1	0-1
	1905	19150	10	16QAM	1	25	22.41	1	0-1
	1905	19150	10	16QAM	1	49	20.96	1	0-1
	1905	19150	10	16QAM	25	0	21.16	2	0-2
	1905	19150	10	16QAM	25	12	21.20	2	0-2
	1905	19150	10	16QAM	25	25	21.15	2	0-2
	1905	19150	10	16QAM	50	0	21.07	2	0-2
	1905	19150	10	16QAM	50	0	21.07	2	0-2

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 30 of 91

Table 9-8
Maximum LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1852.5	18625	5	QPSK	1	0	23.28	0	0
	1852.5	18625	5	QPSK	1	12	23.14	0	0
	1852.5	18625	5	QPSK	1	24	23.21	0	0
	1852.5	18625	5	QPSK	12	0	22.20	1	0-1
	1852.5	18625	5	QPSK	12	6	22.18	1	0-1
	1852.5	18625	5	QPSK	12	13	22.14	1	0-1
	1852.5	18625	5	QPSK	25	0	22.09	1	0-1
	1852.5	18625	5	16-QAM	1	0	22.28	1	0-1
	1852.5	18625	5	16-QAM	1	12	22.31	1	0-1
	1852.5	18625	5	16-QAM	1	24	22.35	1	0-1
	1852.5	18625	5	16-QAM	12	0	21.27	2	0-2
	1852.5	18625	5	16-QAM	12	6	21.25	2	0-2
	1852.5	18625	5	16-QAM	12	13	21.19	2	0-2
	1852.5	18625	5	16-QAM	25	0	21.07	2	0-2
	1880.0	18900	5	QPSK	1	0	23.17	0	0
1880.0	18900	5	QPSK	1	12	23.23	0	0	
1880.0	18900	5	QPSK	1	24	23.17	0	0	
1880.0	18900	5	QPSK	12	0	22.17	1	0-1	
1880.0	18900	5	QPSK	12	6	22.16	1	0-1	
1880.0	18900	5	QPSK	12	13	22.19	1	0-1	
1880.0	18900	5	QPSK	25	0	22.11	1	0-1	
1880.0	18900	5	16-QAM	1	0	22.22	1	0-1	
1880.0	18900	5	16-QAM	1	12	22.24	1	0-1	
1880.0	18900	5	16-QAM	1	24	22.17	1	0-1	
1880.0	18900	5	16-QAM	12	0	21.16	2	0-2	
1880.0	18900	5	16-QAM	12	6	21.19	2	0-2	
1880.0	18900	5	16-QAM	12	13	21.24	2	0-2	
1880.0	18900	5	16-QAM	25	0	21.16	2	0-2	
Mid	1907.5	19175	5	QPSK	1	0	23.13	0	0
	1907.5	19175	5	QPSK	1	12	21.77	0	0
	1907.5	19175	5	QPSK	1	24	21.76	0	0
	1907.5	19175	5	QPSK	12	0	22.23	1	0-1
	1907.5	19175	5	QPSK	12	6	20.80	1	0-1
	1907.5	19175	5	QPSK	12	13	20.79	1	0-1
	1907.5	19175	5	QPSK	25	0	22.11	1	0-1
	1907.5	19175	5	16-QAM	1	0	22.18	1	0-1
	1907.5	19175	5	16-QAM	1	12	20.74	1	0-1
	1907.5	19175	5	16-QAM	1	24	20.77	1	0-1
	1907.5	19175	5	16-QAM	12	0	21.31	2	0-2
	1907.5	19175	5	16-QAM	12	6	19.87	2	0-2
	1907.5	19175	5	16-QAM	12	13	19.89	2	0-2
	1907.5	19175	5	16-QAM	25	0	21.20	2	0-2
	High	1907.5	19175	5	16-QAM	1	0	23.13	0
1907.5		19175	5	16-QAM	1	12	21.77	0	0
1907.5		19175	5	16-QAM	1	24	21.76	0	0
1907.5		19175	5	16-QAM	12	0	22.23	1	0-1
1907.5		19175	5	16-QAM	12	6	20.80	1	0-1
1907.5		19175	5	16-QAM	12	13	20.79	1	0-1
1907.5		19175	5	16-QAM	25	0	22.11	1	0-1
1907.5		19175	5	16-QAM	1	0	22.18	1	0-1
1907.5		19175	5	16-QAM	1	12	20.74	1	0-1
1907.5		19175	5	16-QAM	1	24	20.77	1	0-1
1907.5		19175	5	16-QAM	12	0	21.31	2	0-2
1907.5		19175	5	16-QAM	12	6	19.87	2	0-2
1907.5		19175	5	16-QAM	12	13	19.89	2	0-2
1907.5		19175	5	16-QAM	25	0	21.20	2	0-2

Table 9-9
Maximum LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1851.5	18615	3	QPSK	1	0	23.12	0	0
	1851.5	18615	3	QPSK	1	7	23.18	0	0
	1851.5	18615	3	QPSK	1	14	23.11	0	0
	1851.5	18615	3	QPSK	8	0	22.19	1	0-1
	1851.5	18615	3	QPSK	8	4	22.22	1	0-1
	1851.5	18615	3	QPSK	8	7	22.20	1	0-1
	1851.5	18615	3	QPSK	15	0	22.21	1	0-1
	1851.5	18615	3	16-QAM	1	0	22.36	1	0-1
	1851.5	18615	3	16-QAM	1	7	22.40	1	0-1
	1851.5	18615	3	16-QAM	1	14	22.45	1	0-1
	1851.5	18615	3	16-QAM	8	0	21.23	2	0-2
	1851.5	18615	3	16-QAM	8	4	21.22	2	0-2
	1851.5	18615	3	16-QAM	8	7	21.22	2	0-2
	1851.5	18615	3	16-QAM	15	0	21.26	2	0-2
	Mid	1880.0	18900	3	QPSK	1	0	23.04	0
1880.0		18900	3	QPSK	1	7	23.06	0	0
1880.0		18900	3	QPSK	1	14	23.02	0	0
1880.0		18900	3	QPSK	8	0	22.17	1	0-1
1880.0		18900	3	QPSK	8	4	22.19	1	0-1
1880.0		18900	3	QPSK	8	7	22.20	1	0-1
1880.0		18900	3	QPSK	15	0	22.13	1	0-1
1880.0		18900	3	16-QAM	1	0	22.41	1	0-1
1880.0		18900	3	16-QAM	1	7	22.47	1	0-1
1880.0		18900	3	16-QAM	1	14	22.39	1	0-1
1880.0		18900	3	16-QAM	8	0	21.08	2	0-2
1880.0		18900	3	16-QAM	8	4	21.10	2	0-2
1880.0		18900	3	16-QAM	8	7	21.11	2	0-2
1880.0		18900	3	16-QAM	15	0	21.42	2	0-2
High		1908.5	19185	3	QPSK	1	0	21.73	0
	1908.5	19185	3	QPSK	1	7	21.78	0	0
	1908.5	19185	3	QPSK	1	14	21.76	0	0
	1908.5	19185	3	QPSK	8	0	20.78	1	0-1
	1908.5	19185	3	QPSK	8	4	20.78	1	0-1
	1908.5	19185	3	QPSK	8	7	20.76	1	0-1
	1908.5	19185	3	QPSK	15	0	20.72	1	0-1
	1908.5	19185	3	16-QAM	1	0	20.88	1	0-1
	1908.5	19185	3	16-QAM	1	7	20.94	1	0-1
	1908.5	19185	3	16-QAM	1	14	20.91	1	0-1
	1908.5	19185	3	16-QAM	8	0	19.83	2	0-2
	1908.5	19185	3	16-QAM	8	4	19.84	2	0-2
	1908.5	19185	3	16-QAM	8	7	19.86	2	0-2
	1908.5	19185	3	16-QAM	15	0	19.83	2	0-2

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 31 of 91

Table 9-10
Maximum LTE Band 2 (PCS) Conducted Powers -1.4 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1850.7	18607	1.4	QPSK	1	0	23.11	0	0
	1850.7	18607	1.4	QPSK	1	2	23.12	0	0
	1850.7	18607	1.4	QPSK	1	5	23.09	0	0
	1850.7	18607	1.4	QPSK	3	0	23.13	0	0
	1850.7	18607	1.4	QPSK	3	2	23.14	0	0
	1850.7	18607	1.4	QPSK	3	3	23.13	0	0
	1850.7	18607	1.4	QPSK	6	0	22.26	1	0-1
	1850.7	18607	1.4	16-QAM	1	0	22.41	1	0-1
	1850.7	18607	1.4	16-QAM	1	2	22.40	1	0-1
	1850.7	18607	1.4	16-QAM	1	5	22.39	1	0-1
	1850.7	18607	1.4	16-QAM	3	0	22.25	1	0-1
	1850.7	18607	1.4	16-QAM	3	2	22.24	1	0-1
	1850.7	18607	1.4	16-QAM	3	3	22.20	1	0-1
	1850.7	18607	1.4	16-QAM	6	0	21.10	2	0-2
	1850.7	18607	1.4	16-QAM	6	0	21.10	2	0-2
Mid	1880.0	18900	1.4	QPSK	1	0	23.18	0	0
	1880.0	18900	1.4	QPSK	1	2	23.19	0	0
	1880.0	18900	1.4	QPSK	1	5	23.17	0	0
	1880.0	18900	1.4	QPSK	3	0	23.21	0	0
	1880.0	18900	1.4	QPSK	3	2	23.14	0	0
	1880.0	18900	1.4	QPSK	3	3	23.14	0	0
	1880.0	18900	1.4	QPSK	6	0	22.18	1	0-1
	1880.0	18900	1.4	16-QAM	1	0	21.66	1	0-1
	1880.0	18900	1.4	16-QAM	1	2	21.61	1	0-1
	1880.0	18900	1.4	16-QAM	1	5	21.70	1	0-1
	1880.0	18900	1.4	16-QAM	3	0	22.29	1	0-1
	1880.0	18900	1.4	16-QAM	3	2	22.28	1	0-1
	1880.0	18900	1.4	16-QAM	3	3	22.38	1	0-1
	1880.0	18900	1.4	16-QAM	6	0	21.24	2	0-2
	1880.0	18900	1.4	16-QAM	6	0	21.24	2	0-2
High	1909.3	19193	1.4	QPSK	1	0	21.88	0	0
	1909.3	19193	1.4	QPSK	1	2	21.81	0	0
	1909.3	19193	1.4	QPSK	1	5	21.76	0	0
	1909.3	19193	1.4	QPSK	3	0	21.79	0	0
	1909.3	19193	1.4	QPSK	3	2	21.75	0	0
	1909.3	19193	1.4	QPSK	3	3	21.78	0	0
	1909.3	19193	1.4	QPSK	6	0	20.79	1	0-1
	1909.3	19193	1.4	16-QAM	1	0	20.96	1	0-1
	1909.3	19193	1.4	16-QAM	1	2	20.99	1	0-1
	1909.3	19193	1.4	16-QAM	1	5	20.94	1	0-1
	1909.3	19193	1.4	16-QAM	3	0	20.83	1	0-1
	1909.3	19193	1.4	16-QAM	3	2	20.81	1	0-1
	1909.3	19193	1.4	16-QAM	3	3	20.82	1	0-1
	1909.3	19193	1.4	16-QAM	6	0	19.74	2	0-2
	1909.3	19193	1.4	16-QAM	6	0	19.74	2	0-2

Table 9-11
Reduced LTE Band 2 (PCS) Conducted Powers - 20 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1860	18700	20	QPSK	1	0	20.75	0	0
	1860	18700	20	QPSK	1	50	20.82	0	0
	1860	18700	20	QPSK	1	99	20.75	0	0
	1860	18700	20	QPSK	50	0	20.75	0	0-1
	1860	18700	20	QPSK	50	25	20.64	0	0-1
	1860	18700	20	QPSK	50	50	20.59	0	0-1
	1860	18700	20	QPSK	100	0	20.64	0	0-1
	1860	18700	20	16QAM	1	0	19.93	0	0-1
	1860	18700	20	16QAM	1	50	20.00	0	0-1
	1860	18700	20	16QAM	1	99	20.00	0	0-1
	1860	18700	20	16QAM	50	0	20.62	0	0-2
	1860	18700	20	16QAM	50	25	20.63	0	0-2
	1860	18700	20	16QAM	50	50	20.59	0	0-2
	1860	18700	20	16QAM	100	0	20.60	0	0-2
	1860	18700	20	16QAM	100	0	20.60	0	0-2
Mid	1880.0	18900	20	QPSK	1	0	20.73	0	0
	1880.0	18900	20	QPSK	1	50	20.63	0	0
	1880.0	18900	20	QPSK	1	99	20.75	0	0
	1880.0	18900	20	QPSK	50	0	20.62	0	0-1
	1880.0	18900	20	QPSK	50	25	20.55	0	0-1
	1880.0	18900	20	QPSK	50	50	20.54	0	0-1
	1880.0	18900	20	QPSK	100	0	20.57	0	0-1
	1880.0	18900	20	16QAM	1	0	20.93	0	0-1
	1880.0	18900	20	16QAM	1	50	20.88	0	0-1
	1880.0	18900	20	16QAM	1	99	20.9	0	0-1
	1880.0	18900	20	16QAM	50	0	20.61	0	0-2
	1880.0	18900	20	16QAM	50	25	20.51	0	0-2
	1880.0	18900	20	16QAM	50	50	20.5	0	0-2
	1880.0	18900	20	16QAM	100	0	20.62	0	0-2
	1880.0	18900	20	16QAM	100	0	20.62	0	0-2
High	1900	19100	20	QPSK	1	0	20.68	0	0
	1900	19100	20	QPSK	1	50	20.73	0	0
	1900	19100	20	QPSK	1	99	20.44	0	0
	1900	19100	20	QPSK	50	0	20.64	0	0-1
	1900	19100	20	QPSK	50	25	20.66	0	0-1
	1900	19100	20	QPSK	50	50	20.51	0	0-1
	1900	19100	20	QPSK	100	0	20.52	0	0-1
	1900	19100	20	16QAM	1	0	20.58	0	0-1
	1900	19100	20	16QAM	1	50	20.63	0	0-1
	1900	19100	20	16QAM	1	99	19.88	0	0-1
	1900	19100	20	16QAM	50	0	20.66	0	0-2
	1900	19100	20	16QAM	50	25	20.62	0	0-2
	1900	19100	20	16QAM	50	50	20.46	0	0-2
	1900	19100	20	16QAM	100	0	20.45	0	0-2
	1900	19100	20	16QAM	100	0	20.45	0	0-2

FCC ID: PY7PM-0430		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 32 of 91

Table 9-12
Reduced LTE Band 2 (PCS) Conducted Powers - 15 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1857.5	18675	15	QPSK	1	0	20.71	0	0
	1857.5	18675	15	QPSK	1	36	20.78	0	0
	1857.5	18675	15	QPSK	1	74	20.67	0	0
	1857.5	18675	15	QPSK	36	0	20.60	0	0-1
	1857.5	18675	15	QPSK	36	18	20.63	0	0-1
	1857.5	18675	15	QPSK	36	37	20.57	0	0-1
	1857.5	18675	15	QPSK	75	0	20.54	0	0-1
	1857.5	18675	15	16QAM	1	0	20.76	0	0-1
	1857.5	18675	15	16QAM	1	36	20.86	0	0-1
	1857.5	18675	15	16QAM	1	74	20.77	0	0-1
	1857.5	18675	15	16QAM	36	0	20.56	0	0-2
	1857.5	18675	15	16QAM	36	18	20.59	0	0-2
	1857.5	18675	15	16QAM	36	37	20.52	0	0-2
	1857.5	18675	15	16QAM	75	0	20.47	0	0-2
	1857.5	18675	15	16QAM	75	0	20.47	0	0-2
Mid	1880.0	18900	15	QPSK	1	0	20.62	0	0
	1880.0	18900	15	QPSK	1	36	20.6	0	0
	1880.0	18900	15	QPSK	1	74	20.72	0	0
	1880.0	18900	15	QPSK	36	0	20.55	0	0-1
	1880.0	18900	15	QPSK	36	18	20.46	0	0-1
	1880.0	18900	15	QPSK	36	37	20.49	0	0-1
	1880.0	18900	15	QPSK	75	0	20.45	0	0-1
	1880.0	18900	15	16QAM	1	0	20.8	0	0-1
	1880.0	18900	15	16QAM	1	36	20.7	0	0-1
	1880.0	18900	15	16QAM	1	74	20.81	0	0-1
	1880.0	18900	15	16QAM	36	0	20.48	0	0-2
	1880.0	18900	15	16QAM	36	18	20.45	0	0-2
	1880.0	18900	15	16QAM	36	37	20.47	0	0-2
	1880.0	18900	15	16QAM	75	0	20.35	0	0-2
	1880.0	18900	15	16QAM	75	0	20.35	0	0-2
High	1902.5	19125	15	QPSK	1	0	20.78	0	0
	1902.5	19125	15	QPSK	1	36	20.75	0	0
	1902.5	19125	15	QPSK	1	74	20.57	0	0
	1902.5	19125	15	QPSK	36	0	20.62	0	0-1
	1902.5	19125	15	QPSK	36	18	20.66	0	0-1
	1902.5	19125	15	QPSK	36	37	20.67	0	0-1
	1902.5	19125	15	QPSK	75	0	20.56	0	0-1
	1902.5	19125	15	16QAM	1	0	20.92	0	0-1
	1902.5	19125	15	16QAM	1	36	20.91	0	0-1
	1902.5	19125	15	16QAM	1	74	20.27	0	0-1
	1902.5	19125	15	16QAM	36	0	20.64	0	0-2
	1902.5	19125	15	16QAM	36	18	20.66	0	0-2
	1902.5	19125	15	16QAM	36	37	20.60	0	0-2
	1902.5	19125	15	16QAM	75	0	20.51	0	0-2
	1902.5	19125	15	16QAM	75	0	20.51	0	0-2

Table 9-13
Reduced LTE Band 2 (PCS) Conducted Powers - 10 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1855	18650	10	QPSK	1	0	20.74	0	0
	1855	18650	10	QPSK	1	25	20.85	0	0
	1855	18650	10	QPSK	1	49	20.78	0	0
	1855	18650	10	QPSK	25	0	20.73	0	0-1
	1855	18650	10	QPSK	25	12	20.74	0	0-1
	1855	18650	10	QPSK	25	25	20.76	0	0-1
	1855	18650	10	QPSK	50	0	20.64	0	0-1
	1855	18650	10	16QAM	1	0	20.85	0	0-1
	1855	18650	10	16QAM	1	25	20.97	0	0-1
	1855	18650	10	16QAM	1	49	20.89	0	0-1
	1855	18650	10	16QAM	25	0	20.71	0	0-2
	1855	18650	10	16QAM	25	12	20.67	0	0-2
	1855	18650	10	16QAM	25	25	20.73	0	0-2
	1855	18650	10	16QAM	50	0	20.46	0	0-2
	1855	18650	10	16QAM	50	0	20.46	0	0-2
Mid	1880.0	18900	10	QPSK	1	0	20.60	0	0
	1880.0	18900	10	QPSK	1	25	20.54	0	0
	1880.0	18900	10	QPSK	1	49	20.63	0	0
	1880.0	18900	10	QPSK	25	0	20.61	0	0-1
	1880.0	18900	10	QPSK	25	12	20.49	0	0-1
	1880.0	18900	10	QPSK	25	25	20.55	0	0-1
	1880.0	18900	10	QPSK	50	0	20.47	0	0-1
	1880.0	18900	10	16QAM	1	0	20.86	0	0-1
	1880.0	18900	10	16QAM	1	25	20.79	0	0-1
	1880.0	18900	10	16QAM	1	49	20.82	0	0-1
	1880.0	18900	10	16QAM	25	0	20.74	0	0-2
	1880.0	18900	10	16QAM	25	12	20.58	0	0-2
	1880.0	18900	10	16QAM	25	25	20.7	0	0-2
	1880.0	18900	10	16QAM	50	0	20.44	0	0-2
	1880.0	18900	10	16QAM	50	0	20.44	0	0-2
High	1905	19150	10	QPSK	1	0	20.64	0	0
	1905	19150	10	QPSK	1	25	20.66	0	0
	1905	19150	10	QPSK	1	49	20.42	0	0
	1905	19150	10	QPSK	25	0	20.54	0	0-1
	1905	19150	10	QPSK	25	12	20.50	0	0-1
	1905	19150	10	QPSK	25	25	20.49	0	0-1
	1905	19150	10	QPSK	50	0	20.48	0	0-1
	1905	19150	10	16QAM	1	0	20.76	0	0-1
	1905	19150	10	16QAM	1	25	20.71	0	0-1
	1905	19150	10	16QAM	1	49	20.15	0	0-1
	1905	19150	10	16QAM	25	0	20.53	0	0-2
	1905	19150	10	16QAM	25	12	20.52	0	0-2
	1905	19150	10	16QAM	25	25	20.49	0	0-2
	1905	19150	10	16QAM	50	0	20.34	0	0-2
	1905	19150	10	16QAM	50	0	20.34	0	0-2

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 33 of 91

Table 9-14
Reduced LTE Band 2 (PCS) Conducted Powers - 5 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]	
Low	1852.5	18625	5	QPSK	1	0	20.65	0	0	
	1852.5	18625	5	QPSK	1	12	20.63	0	0	
	1852.5	18625	5	QPSK	1	24	20.67	0	0	
	1852.5	18625	5	QPSK	12	0	20.59	0	0-1	
	1852.5	18625	5	QPSK	12	6	20.58	0	0-1	
	1852.5	18625	5	QPSK	12	13	20.56	0	0-1	
	1852.5	18625	5	QPSK	25	0	20.49	0	0-1	
	1852.5	18625	5	16-QAM	1	0	20.53	0	0-1	
	1852.5	18625	5	16-QAM	1	12	20.51	0	0-1	
	1852.5	18625	5	16-QAM	1	24	20.54	0	0-1	
	1852.5	18625	5	16-QAM	12	0	20.53	0	0-2	
	1852.5	18625	5	16-QAM	12	6	20.55	0	0-2	
	1852.5	18625	5	16-QAM	12	13	20.51	0	0-2	
	1852.5	18625	5	16-QAM	25	0	20.53	0	0-2	
	1880.0	18900	5	QPSK	1	0	20.72	0	0	
	1880.0	18900	5	QPSK	1	12	20.67	0	0	
	1880.0	18900	5	QPSK	1	24	20.69	0	0	
	1880.0	18900	5	QPSK	12	0	20.64	0	0-1	
1880.0	18900	5	QPSK	12	6	20.64	0	0-1		
1880.0	18900	5	QPSK	12	13	20.65	0	0-1		
1880.0	18900	5	QPSK	25	0	20.57	0	0-1		
1880.0	18900	5	16-QAM	1	0	20.74	0	0-1		
1880.0	18900	5	16-QAM	1	12	20.62	0	0-1		
1880.0	18900	5	16-QAM	1	24	20.69	0	0-1		
1880.0	18900	5	16-QAM	12	0	20.64	0	0-2		
1880.0	18900	5	16-QAM	12	6	20.65	0	0-2		
1880.0	18900	5	16-QAM	12	13	20.64	0	0-2		
1880.0	18900	5	16-QAM	25	0	20.63	0	0-2		
Mid	1907.5	19175	5	QPSK	1	0	20.61	0	0	
	1907.5	19175	5	QPSK	1	12	20.42	0	0	
	1907.5	19175	5	QPSK	1	24	20.47	0	0	
	1907.5	19175	5	QPSK	12	0	20.46	0	0-1	
	1907.5	19175	5	QPSK	12	6	20.04	0	0-1	
	1907.5	19175	5	QPSK	12	13	20.05	0	0-1	
	1907.5	19175	5	QPSK	25	0	20.37	0	0-1	
	1907.5	19175	5	16-QAM	1	0	20.45	0	0-1	
	1907.5	19175	5	16-QAM	1	12	19.90	0	0-1	
	1907.5	19175	5	16-QAM	1	24	19.91	0	0-1	
	1907.5	19175	5	16-QAM	12	0	20.42	0	0-2	
	1907.5	19175	5	16-QAM	12	6	19.06	0	0-2	
	1907.5	19175	5	16-QAM	12	13	19.04	0	0-2	
	1907.5	19175	5	16-QAM	25	0	20.32	0	0-2	
	High	1907.5	19175	5	QPSK	1	0	20.61	0	0
		1907.5	19175	5	QPSK	1	12	20.42	0	0
		1907.5	19175	5	QPSK	1	24	20.47	0	0
		1907.5	19175	5	QPSK	12	0	20.46	0	0-1
1907.5		19175	5	QPSK	12	6	20.04	0	0-1	
1907.5		19175	5	QPSK	12	13	20.05	0	0-1	
1907.5		19175	5	QPSK	25	0	20.37	0	0-1	
1907.5		19175	5	16-QAM	1	0	20.45	0	0-1	
1907.5		19175	5	16-QAM	1	12	19.90	0	0-1	
1907.5		19175	5	16-QAM	1	24	19.91	0	0-1	
1907.5		19175	5	16-QAM	12	0	20.42	0	0-2	
1907.5		19175	5	16-QAM	12	6	19.06	0	0-2	
1907.5		19175	5	16-QAM	12	13	19.04	0	0-2	
1907.5		19175	5	16-QAM	25	0	20.32	0	0-2	

Table 9-15
Reduced LTE Band 2 (PCS) Conducted Powers - 3 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]	
Low	1851.5	18615	3	QPSK	1	0	20.65	0	0	
	1851.5	18615	3	QPSK	1	7	20.54	0	0	
	1851.5	18615	3	QPSK	1	14	20.55	0	0	
	1851.5	18615	3	QPSK	8	0	20.69	0	0-1	
	1851.5	18615	3	QPSK	8	4	20.67	0	0-1	
	1851.5	18615	3	QPSK	8	7	20.65	0	0-1	
	1851.5	18615	3	QPSK	15	0	20.71	0	0-1	
	1851.5	18615	3	16-QAM	1	0	19.95	0	0-1	
	1851.5	18615	3	16-QAM	1	7	20.03	0	0-1	
	1851.5	18615	3	16-QAM	1	14	20.01	0	0-1	
	1851.5	18615	3	16-QAM	8	0	20.62	0	0-2	
	1851.5	18615	3	16-QAM	8	4	20.64	0	0-2	
	1851.5	18615	3	16-QAM	8	7	20.66	0	0-2	
	1851.5	18615	3	16-QAM	8	7	20.66	0	0-2	
	1851.5	18615	3	16-QAM	15	0	20.69	0	0-2	
	1880.0	18900	3	QPSK	1	0	20.56	0	0	
	1880.0	18900	3	QPSK	1	7	20.6	0	0	
	1880.0	18900	3	QPSK	1	14	20.64	0	0	
1880.0	18900	3	QPSK	8	0	20.46	0	0-1		
1880.0	18900	3	QPSK	8	4	20.45	0	0-1		
1880.0	18900	3	QPSK	8	7	20.46	0	0-1		
1880.0	18900	3	QPSK	15	0	20.47	0	0-1		
1880.0	18900	3	16-QAM	1	0	20.67	0	0-1		
1880.0	18900	3	16-QAM	1	7	20.66	0	0-1		
1880.0	18900	3	16-QAM	1	14	20.71	0	0-1		
1880.0	18900	3	16-QAM	8	0	20.5	0	0-2		
1880.0	18900	3	16-QAM	8	4	20.54	0	0-2		
1880.0	18900	3	16-QAM	8	7	20.54	0	0-2		
1880.0	18900	3	16-QAM	15	0	20.56	0	0-2		
Mid	1908.5	19185	3	QPSK	1	0	20.99	0	0	
	1908.5	19185	3	QPSK	1	7	21.00	0	0	
	1908.5	19185	3	QPSK	1	14	20.98	0	0	
	1908.5	19185	3	QPSK	8	0	20.12	0	0-1	
	1908.5	19185	3	QPSK	8	4	20.08	0	0-1	
	1908.5	19185	3	QPSK	8	7	20.07	0	0-1	
	1908.5	19185	3	QPSK	15	0	20.11	0	0-1	
	1908.5	19185	3	16-QAM	1	0	20.19	0	0-1	
	1908.5	19185	3	16-QAM	1	7	20.25	0	0-1	
	1908.5	19185	3	16-QAM	1	14	20.26	0	0-1	
	1908.5	19185	3	16-QAM	8	0	19.14	0	0-2	
	1908.5	19185	3	16-QAM	8	4	19.12	0	0-2	
	1908.5	19185	3	16-QAM	8	7	19.15	0	0-2	
	1908.5	19185	3	16-QAM	15	0	19.22	0	0-2	
	High	1908.5	19185	3	QPSK	1	0	20.99	0	0
		1908.5	19185	3	QPSK	1	7	21.00	0	0
		1908.5	19185	3	QPSK	1	14	20.98	0	0
		1908.5	19185	3	QPSK	8	0	20.12	0	0-1
1908.5		19185	3	QPSK	8	4	20.08	0	0-1	
1908.5		19185	3	QPSK	8	7	20.07	0	0-1	
1908.5		19185	3	QPSK	15	0	20.11	0	0-1	
1908.5		19185	3	16-QAM	1	0	20.19	0	0-1	
1908.5		19185	3	16-QAM	1	7	20.25	0	0-1	
1908.5		19185	3	16-QAM	1	14	20.26	0	0-1	
1908.5		19185	3	16-QAM	8	0	19.14	0	0-2	
1908.5		19185	3	16-QAM	8	4	19.12	0	0-2	
1908.5		19185	3	16-QAM	8	7	19.15	0	0-2	
1908.5		19185	3	16-QAM	15	0	19.22	0	0-2	

Table 9-16
Reduced LTE Band 2 (PCS) Conducted Powers - 1.4 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1850.7	18607	1.4	QPSK	1	0	20.92	0	0
	1850.7	18607	1.4	QPSK	1	2	20.87	0	0
	1850.7	18607	1.4	QPSK	1	5	20.85	0	0
	1850.7	18607	1.4	QPSK	3	0	20.92	0	0
	1850.7	18607	1.4	QPSK	3	2	20.91	0	0
	1850.7	18607	1.4	QPSK	3	3	20.90	0	0
	1850.7	18607	1.4	QPSK	6	0	20.93	0	0-1
	1850.7	18607	1.4	16-QAM	1	0	20.93	0	0-1
	1850.7	18607	1.4	16-QAM	1	2	20.94	0	0-1
	1850.7	18607	1.4	16-QAM	1	5	20.92	0	0-1
	1850.7	18607	1.4	16-QAM	3	0	20.84	0	0-1
	1850.7	18607	1.4	16-QAM	3	2	20.82	0	0-1
	1850.7	18607	1.4	16-QAM	3	3	20.79	0	0-1
	1850.7	18607	1.4	16-QAM	6	0	20.61	0	0-2
	1880.0	18900	1.4	QPSK	1	0	20.73	0	0
	1880.0	18900	1.4	QPSK	1	2	20.66	0	0
	1880.0	18900	1.4	QPSK	1	5	20.75	0	0
	1880.0	18900	1.4	QPSK	3	0	20.65	0	0
1880.0	18900	1.4	QPSK	3	2	20.61	0	0	
1880.0	18900	1.4	QPSK	3	3	20.62	0	0	
1880.0	18900	1.4	QPSK	6	0	20.7	0	0-1	
1880.0	18900	1.4	16-QAM	1	0	20.2	0	0-1	
1880.0	18900	1.4	16-QAM	1	2	20.19	0	0-1	
1880.0	18900	1.4	16-QAM	1	5	20.28	0	0-1	
1880.0	18900	1.4	16-QAM	3	0	20.82	0	0-1	
1880.0	18900	1.4	16-QAM	3	2	20.83	0	0-1	
1880.0	18900	1.4	16-QAM	3	3	20.95	0	0-1	
1880.0	18900	1.4	16-QAM	6	0	20.79	0	0-2	
High	1909.3	19193	1.4	QPSK	1	0	20.52	0	0
	1909.3	19193	1.4	QPSK	1	2	20.48	0	0
	1909.3	19193	1.4	QPSK	1	5	20.51	0	0
	1909.3	19193	1.4	QPSK	3	0	20.58	0	0
	1909.3	19193	1.4	QPSK	3	2	20.68	0	0
	1909.3	19193	1.4	QPSK	3	3	20.65	0	0
	1909.3	19193	1.4	QPSK	6	0	20.14	0	0-1
	1909.3	19193	1.4	16-QAM	1	0	19.41	0	0-1
	1909.3	19193	1.4	16-QAM	1	2	19.39	0	0-1
	1909.3	19193	1.4	16-QAM	1	5	19.41	0	0-1
	1909.3	19193	1.4	16-QAM	3	0	20.18	0	0-1
	1909.3	19193	1.4	16-QAM	3	2	20.17	0	0-1
	1909.3	19193	1.4	16-QAM	3	3	20.16	0	0-1
	1909.3	19193	1.4	16-QAM	6	0	19.39	0	0-2

9.3.2 LTE Band 4 (AWS)

Table 9-17
Maximum LTE Band 4 (AWS) Conducted Powers - 20 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Mid	1732.5	20175	20	QPSK	1	0	23.41	0	0
	1732.5	20175	20	QPSK	1	50	23.33	0	0
	1732.5	20175	20	QPSK	1	99	23.36	0	0
	1732.5	20175	20	QPSK	50	0	22.12	1	0-1
	1732.5	20175	20	QPSK	50	25	22.11	1	0-1
	1732.5	20175	20	QPSK	50	50	22.06	1	0-1
	1732.5	20175	20	QPSK	100	0	22.10	1	0-1
	1732.5	20175	20	16QAM	1	0	22.33	1	0-1
	1732.5	20175	20	16QAM	1	50	22.29	1	0-1
	1732.5	20175	20	16QAM	1	99	22.31	1	0-1
	1732.5	20175	20	16QAM	50	0	21.12	2	0-2
	1732.5	20175	20	16QAM	50	25	21.15	2	0-2
	1732.5	20175	20	16QAM	50	50	21.12	2	0-2
	1732.5	20175	20	16QAM	100	0	21.15	2	0-2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 35 of 91

Table 9-18
Maximum LTE Band 4 (AWS) Conducted Powers - 15 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1717.5	20025	15	QPSK	1	0	23.43	0	0
	1717.5	20025	15	QPSK	1	36	23.35	0	0
	1717.5	20025	15	QPSK	1	74	23.34	0	0
	1717.5	20025	15	QPSK	36	0	22.13	1	0-1
	1717.5	20025	15	QPSK	36	18	22.11	1	0-1
	1717.5	20025	15	QPSK	36	37	22.09	1	0-1
	1717.5	20025	15	QPSK	75	0	22.05	1	0-1
	1717.5	20025	15	16QAM	1	0	22.39	1	0-1
	1717.5	20025	15	16QAM	1	36	22.34	1	0-1
	1717.5	20025	15	16QAM	1	74	22.38	1	0-1
	1717.5	20025	15	16QAM	36	0	21.20	2	0-2
	1717.5	20025	15	16QAM	36	18	21.15	2	0-2
	1717.5	20025	15	16QAM	36	37	21.19	2	0-2
	1717.5	20025	15	16QAM	75	0	21.04	2	0-2
	1732.5	20175	15	QPSK	1	0	23.24	0	0
Mid	1732.5	20175	15	QPSK	1	36	23.20	0	0
	1732.5	20175	15	QPSK	1	74	23.23	0	0
	1732.5	20175	15	QPSK	36	0	22.12	1	0-1
	1732.5	20175	15	QPSK	36	18	22.09	1	0-1
	1732.5	20175	15	QPSK	36	37	22.06	1	0-1
	1732.5	20175	15	QPSK	75	0	22.04	1	0-1
	1732.5	20175	15	16QAM	1	0	22.24	1	0-1
	1732.5	20175	15	16QAM	1	36	22.18	1	0-1
	1732.5	20175	15	16QAM	1	74	22.28	1	0-1
	1732.5	20175	15	16QAM	36	0	21.19	2	0-2
	1732.5	20175	15	16QAM	36	18	21.16	2	0-2
	1732.5	20175	15	16QAM	36	37	21.16	2	0-2
	1732.5	20175	15	16QAM	75	0	21.02	2	0-2
	1747.5	20325	15	QPSK	1	0	23.37	0	0
	High	1747.5	20325	15	QPSK	1	36	23.38	0
1747.5		20325	15	QPSK	1	74	23.40	0	0
1747.5		20325	15	QPSK	36	0	22.13	1	0-1
1747.5		20325	15	QPSK	36	18	22.08	1	0-1
1747.5		20325	15	QPSK	36	37	22.10	1	0-1
1747.5		20325	15	QPSK	75	0	21.99	1	0-1
1747.5		20325	15	16QAM	1	0	22.31	1	0-1
1747.5		20325	15	16QAM	1	36	22.11	1	0-1
1747.5		20325	15	16QAM	1	74	22.30	1	0-1
1747.5		20325	15	16QAM	36	0	21.15	2	0-2
1747.5		20325	15	16QAM	36	18	21.11	2	0-2
1747.5		20325	15	16QAM	36	37	21.12	2	0-2
1747.5		20325	15	16QAM	75	0	21.07	2	0-2

Table 9-19
Maximum LTE Band 4 (AWS) Conducted Powers - 10 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1715	20000	10	QPSK	1	0	23.41	0	0
	1715	20000	10	QPSK	1	25	23.37	0	0
	1715	20000	10	QPSK	1	49	23.38	0	0
	1715	20000	10	QPSK	25	0	22.31	1	0-1
	1715	20000	10	QPSK	25	12	22.28	1	0-1
	1715	20000	10	QPSK	25	25	22.19	1	0-1
	1715	20000	10	QPSK	50	0	22.08	1	0-1
	1715	20000	10	16QAM	1	0	22.21	1	0-1
	1715	20000	10	16QAM	1	25	22.22	1	0-1
	1715	20000	10	16QAM	1	49	22.24	1	0-1
	1715	20000	10	16QAM	25	0	21.30	2	0-2
	1715	20000	10	16QAM	25	12	21.29	2	0-2
	1715	20000	10	16QAM	25	25	21.24	2	0-2
	1715	20000	10	16QAM	50	0	21.10	2	0-2
	1732.5	20175	10	QPSK	1	0	23.25	0	0
Mid	1732.5	20175	10	QPSK	1	25	23.20	0	0
	1732.5	20175	10	QPSK	1	49	23.21	0	0
	1732.5	20175	10	QPSK	25	0	22.19	1	0-1
	1732.5	20175	10	QPSK	25	12	22.16	1	0-1
	1732.5	20175	10	QPSK	25	25	22.19	1	0-1
	1732.5	20175	10	QPSK	50	0	22.09	1	0-1
	1732.5	20175	10	16QAM	1	0	22.21	1	0-1
	1732.5	20175	10	16QAM	1	25	22.14	1	0-1
	1732.5	20175	10	16QAM	1	49	22.18	1	0-1
	1732.5	20175	10	16QAM	25	0	21.26	2	0-2
	1732.5	20175	10	16QAM	25	12	21.23	2	0-2
	1732.5	20175	10	16QAM	25	25	21.19	2	0-2
	1732.5	20175	10	16QAM	50	0	21.08	2	0-2
	1750	20350	10	QPSK	1	0	23.23	0	0
	High	1750	20350	10	QPSK	1	25	23.25	0
1750		20350	10	QPSK	1	49	23.31	0	0
1750		20350	10	QPSK	25	0	22.12	1	0-1
1750		20350	10	QPSK	25	12	22.13	1	0-1
1750		20350	10	QPSK	25	25	22.21	1	0-1
1750		20350	10	QPSK	50	0	22.14	1	0-1
1750		20350	10	16QAM	1	0	22.13	1	0-1
1750		20350	10	16QAM	1	25	22.10	1	0-1
1750		20350	10	16QAM	1	49	22.12	1	0-1
1750		20350	10	16QAM	25	0	21.20	2	0-2
1750		20350	10	16QAM	25	12	21.18	2	0-2
1750		20350	10	16QAM	25	25	21.19	2	0-2
1750		20350	10	16QAM	50	0	21.20	2	0-2

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 36 of 91

Table 9-20
Maximum LTE Band 4 (AWS) Conducted Powers - 5 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]	
Low	1712.5	19975	5	QPSK	1	0	23.42	0	0	
	1712.5	19975	5	QPSK	1	12	23.45	0	0	
	1712.5	19975	5	QPSK	1	24	23.39	0	0	
	1712.5	19975	5	QPSK	12	0	22.34	1	0-1	
	1712.5	19975	5	QPSK	12	6	22.36	1	0-1	
	1712.5	19975	5	QPSK	12	13	22.33	1	0-1	
	1712.5	19975	5	QPSK	25	0	22.29	1	0-1	
	1712.5	19975	5	16-QAM	1	0	22.40	1	0-1	
	1712.5	19975	5	16-QAM	1	12	22.37	1	0-1	
	1712.5	19975	5	16-QAM	1	24	22.39	1	0-1	
	1712.5	19975	5	16-QAM	12	0	21.46	2	0-2	
	1712.5	19975	5	16-QAM	12	6	21.47	2	0-2	
	1712.5	19975	5	16-QAM	12	13	21.50	2	0-2	
	1712.5	19975	5	16-QAM	25	0	21.26	2	0-2	
	Mid	1732.5	20175	5	QPSK	1	0	23.22	0	0
		1732.5	20175	5	QPSK	1	12	23.18	0	0
1732.5		20175	5	QPSK	1	24	23.16	0	0	
1732.5		20175	5	QPSK	12	0	22.23	1	0-1	
1732.5		20175	5	QPSK	12	6	22.26	1	0-1	
1732.5		20175	5	QPSK	12	13	22.29	1	0-1	
1732.5		20175	5	QPSK	25	0	22.15	1	0-1	
1732.5		20175	5	16-QAM	1	0	22.07	1	0-1	
1732.5		20175	5	16-QAM	1	12	21.99	1	0-1	
1732.5		20175	5	16-QAM	1	24	22.05	1	0-1	
1732.5		20175	5	16-QAM	12	0	21.29	2	0-2	
1732.5		20175	5	16-QAM	12	6	21.29	2	0-2	
1732.5		20175	5	16-QAM	12	13	21.30	2	0-2	
1732.5		20175	5	16-QAM	25	0	21.17	2	0-2	
High		1752.5	20375	5	QPSK	1	0	23.41	0	0
		1752.5	20375	5	QPSK	1	12	23.36	0	0
	1752.5	20375	5	QPSK	1	24	23.43	0	0	
	1752.5	20375	5	QPSK	12	0	22.22	1	0-1	
	1752.5	20375	5	QPSK	12	6	22.24	1	0-1	
	1752.5	20375	5	QPSK	12	13	22.34	1	0-1	
	1752.5	20375	5	QPSK	25	0	22.15	1	0-1	
	1752.5	20375	5	16-QAM	1	0	22.15	1	0-1	
	1752.5	20375	5	16-QAM	1	12	22.17	1	0-1	
	1752.5	20375	5	16-QAM	1	24	22.21	1	0-1	
	1752.5	20375	5	16-QAM	12	0	21.22	2	0-2	
	1752.5	20375	5	16-QAM	12	6	21.24	2	0-2	
	1752.5	20375	5	16-QAM	12	13	21.31	2	0-2	
	1752.5	20375	5	16-QAM	25	0	21.15	2	0-2	

Table 9-21
Maximum LTE Band 4 (AWS) Conducted Powers - 3 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]	
Low	1711.5	19965	3	QPSK	1	0	23.37	0	0	
	1711.5	19965	3	QPSK	1	7	23.29	0	0	
	1711.5	19965	3	QPSK	1	14	23.32	0	0	
	1711.5	19965	3	QPSK	8	0	22.35	1	0-1	
	1711.5	19965	3	QPSK	8	4	22.32	1	0-1	
	1711.5	19965	3	QPSK	8	7	22.36	1	0-1	
	1711.5	19965	3	QPSK	15	0	22.30	1	0-1	
	1711.5	19965	3	16-QAM	1	0	22.25	1	0-1	
	1711.5	19965	3	16-QAM	1	7	22.23	1	0-1	
	1711.5	19965	3	16-QAM	1	14	22.26	1	0-1	
	1711.5	19965	3	16-QAM	8	0	21.26	2	0-2	
	1711.5	19965	3	16-QAM	8	4	21.23	2	0-2	
	1711.5	19965	3	16-QAM	8	7	21.24	2	0-2	
	1711.5	19965	3	16-QAM	15	0	21.33	2	0-2	
	Mid	1732.5	20175	3	QPSK	1	0	23.20	0	0
		1732.5	20175	3	QPSK	1	7	23.18	0	0
1732.5		20175	3	QPSK	1	14	23.12	0	0	
1732.5		20175	3	QPSK	8	0	22.22	1	0-1	
1732.5		20175	3	QPSK	8	4	22.24	1	0-1	
1732.5		20175	3	QPSK	8	7	22.27	1	0-1	
1732.5		20175	3	QPSK	15	0	22.23	1	0-1	
1732.5		20175	3	16-QAM	1	0	22.20	1	0-1	
1732.5		20175	3	16-QAM	1	7	22.11	1	0-1	
1732.5		20175	3	16-QAM	1	14	22.22	1	0-1	
1732.5		20175	3	16-QAM	8	0	21.32	2	0-2	
1732.5		20175	3	16-QAM	8	4	21.38	2	0-2	
1732.5		20175	3	16-QAM	8	7	21.36	2	0-2	
1732.5		20175	3	16-QAM	15	0	21.26	2	0-2	
High		1753.5	20385	3	QPSK	1	0	23.20	0	0
		1753.5	20385	3	QPSK	1	7	23.24	0	0
	1753.5	20385	3	QPSK	1	14	23.27	0	0	
	1753.5	20385	3	QPSK	8	0	22.30	1	0-1	
	1753.5	20385	3	QPSK	8	4	22.34	1	0-1	
	1753.5	20385	3	QPSK	8	7	22.32	1	0-1	
	1753.5	20385	3	QPSK	15	0	22.25	1	0-1	
	1753.5	20385	3	16-QAM	1	0	22.04	1	0-1	
	1753.5	20385	3	16-QAM	1	7	22.08	1	0-1	
	1753.5	20385	3	16-QAM	1	14	22.10	1	0-1	
	1753.5	20385	3	16-QAM	8	0	21.30	2	0-2	
	1753.5	20385	3	16-QAM	8	4	21.33	2	0-2	
	1753.5	20385	3	16-QAM	8	7	21.31	2	0-2	
	1753.5	20385	3	16-QAM	15	0	21.33	2	0-2	

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 37 of 91

Table 9-22
Maximum LTE Band 4 (AWS) Conducted Powers -1.4 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1710.7	19957	1.4	QPSK	1	0	23.36	0	0
	1710.7	19957	1.4	QPSK	1	2	23.35	0	0
	1710.7	19957	1.4	QPSK	1	5	23.36	0	0
	1710.7	19957	1.4	QPSK	3	0	23.35	0	0
	1710.7	19957	1.4	QPSK	3	2	23.32	0	0
	1710.7	19957	1.4	QPSK	3	3	23.39	0	0
	1710.7	19957	1.4	QPSK	6	0	22.40	1	0-1
	1710.7	19957	1.4	16-QAM	1	0	22.30	1	0-1
	1710.7	19957	1.4	16-QAM	1	2	22.26	1	0-1
	1710.7	19957	1.4	16-QAM	1	5	22.32	1	0-1
	1710.7	19957	1.4	16-QAM	3	0	22.20	1	0-1
	1710.7	19957	1.4	16-QAM	3	2	22.23	1	0-1
	1710.7	19957	1.4	16-QAM	3	3	22.19	1	0-1
	1710.7	19957	1.4	16-QAM	6	0	21.37	2	0-2
	1710.7	19957	1.4	16-QAM	6	0	21.37	2	0-2
Mid	1732.5	20175	1.4	QPSK	1	0	23.29	0	0
	1732.5	20175	1.4	QPSK	1	2	23.24	0	0
	1732.5	20175	1.4	QPSK	1	5	23.29	0	0
	1732.5	20175	1.4	QPSK	3	0	23.20	0	0
	1732.5	20175	1.4	QPSK	3	2	23.23	0	0
	1732.5	20175	1.4	QPSK	3	3	23.16	0	0
	1732.5	20175	1.4	QPSK	6	0	22.27	1	0-1
	1732.5	20175	1.4	16-QAM	1	0	22.13	1	0-1
	1732.5	20175	1.4	16-QAM	1	2	22.05	1	0-1
	1732.5	20175	1.4	16-QAM	1	5	22.07	1	0-1
	1732.5	20175	1.4	16-QAM	3	0	22.24	1	0-1
	1732.5	20175	1.4	16-QAM	3	2	22.27	1	0-1
	1732.5	20175	1.4	16-QAM	3	3	22.31	1	0-1
	1732.5	20175	1.4	16-QAM	6	0	21.34	2	0-2
	1732.5	20175	1.4	16-QAM	6	0	21.34	2	0-2
High	1754.3	20393	1.4	QPSK	1	0	23.29	0	0
	1754.3	20393	1.4	QPSK	1	2	23.26	0	0
	1754.3	20393	1.4	QPSK	1	5	23.27	0	0
	1754.3	20393	1.4	QPSK	3	0	23.31	0	0
	1754.3	20393	1.4	QPSK	3	2	23.38	0	0
	1754.3	20393	1.4	QPSK	3	3	23.35	0	0
	1754.3	20393	1.4	QPSK	6	0	22.38	1	0-1
	1754.3	20393	1.4	16-QAM	1	0	22.15	1	0-1
	1754.3	20393	1.4	16-QAM	1	2	22.17	1	0-1
	1754.3	20393	1.4	16-QAM	1	5	22.12	1	0-1
	1754.3	20393	1.4	16-QAM	3	0	22.31	1	0-1
	1754.3	20393	1.4	16-QAM	3	2	22.30	1	0-1
	1754.3	20393	1.4	16-QAM	3	3	22.38	1	0-1
	1754.3	20393	1.4	16-QAM	6	0	21.40	2	0-2
	1754.3	20393	1.4	16-QAM	6	0	21.40	2	0-2

Table 9-23
Reduced LTE Band 4 (AWS) Conducted Powers -20 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Mid	1732.5	20175	20	QPSK	1	0	21.44	0	0
	1732.5	20175	20	QPSK	1	50	21.33	0	0
	1732.5	20175	20	QPSK	1	99	21.39	0	0
	1732.5	20175	20	QPSK	50	0	21.14	0	0-1
	1732.5	20175	20	QPSK	50	25	21.06	0	0-1
	1732.5	20175	20	QPSK	50	50	21.05	0	0-1
	1732.5	20175	20	QPSK	100	0	21.12	0	0-1
	1732.5	20175	20	16QAM	1	0	21.24	0	0-1
	1732.5	20175	20	16QAM	1	50	21.16	0	0-1
	1732.5	20175	20	16QAM	1	99	21.29	0	0-1
	1732.5	20175	20	16QAM	50	0	21.06	0	0-2
	1732.5	20175	20	16QAM	50	25	21.03	0	0-2
	1732.5	20175	20	16QAM	50	50	21.08	0	0-2
	1732.5	20175	20	16QAM	100	0	21.07	0	0-2
	1732.5	20175	20	16QAM	100	0	21.07	0	0-2

Note: LTE Band 4 (AWS) at 20 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 38 of 91

Table 9-24
Reduced LTE Band 4 (AWS) Conducted Powers -15 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]	
Low	1717.5	20025	15	QPSK	1	0	21.39	0	0	
	1717.5	20025	15	QPSK	1	36	21.38	0	0	
	1717.5	20025	15	QPSK	1	74	21.35	0	0	
	1717.5	20025	15	QPSK	36	0	21.17	0	-0.1	
	1717.5	20025	15	QPSK	36	18	21.16	0	-0.1	
	1717.5	20025	15	QPSK	36	37	21.21	0	-0.1	
	1717.5	20025	15	QPSK	75	0	21.13	0	-0.1	
	1717.5	20025	15	16QAM	1	0	21.27	0	-0.1	
	1717.5	20025	15	16QAM	1	36	21.32	0	-0.1	
	1717.5	20025	15	16QAM	1	74	21.29	0	-0.1	
	1717.5	20025	15	16QAM	36	0	21.18	0	-0.2	
	1717.5	20025	15	16QAM	36	18	21.12	0	-0.2	
	1717.5	20025	15	16QAM	36	37	21.21	0	-0.2	
	1717.5	20025	15	16QAM	75	0	21.12	0	-0.2	
	Mid	1732.5	20175	15	QPSK	1	0	21.21	0	0
		1732.5	20175	15	QPSK	1	36	21.20	0	0
		1732.5	20175	15	QPSK	1	74	21.22	0	0
		1732.5	20175	15	QPSK	36	0	21.08	0	-0.1
1732.5		20175	15	QPSK	36	18	21.07	0	-0.1	
1732.5		20175	15	QPSK	36	37	21.14	0	-0.1	
1732.5		20175	15	QPSK	75	0	21.06	0	-0.1	
1732.5		20175	15	16QAM	1	0	21.25	0	-0.1	
1732.5		20175	15	16QAM	1	36	21.14	0	-0.1	
1732.5		20175	15	16QAM	1	74	21.16	0	-0.1	
1732.5		20175	15	16QAM	36	0	21.14	0	-0.2	
1732.5		20175	15	16QAM	36	18	21.14	0	-0.2	
1732.5		20175	15	16QAM	36	37	21.13	0	-0.2	
1732.5		20175	15	16QAM	75	0	20.99	0	-0.2	
High		1747.5	20325	15	QPSK	1	0	21.41	0	0
		1747.5	20325	15	QPSK	1	36	21.39	0	0
		1747.5	20325	15	QPSK	1	74	21.40	0	0
		1747.5	20325	15	QPSK	36	0	21.10	0	-0.1
	1747.5	20325	15	QPSK	36	18	21.06	0	-0.1	
	1747.5	20325	15	QPSK	36	37	21.09	0	-0.1	
	1747.5	20325	15	QPSK	75	0	21.03	0	-0.1	
	1747.5	20325	15	16QAM	1	0	21.39	0	-0.1	
	1747.5	20325	15	16QAM	1	36	21.38	0	-0.1	
	1747.5	20325	15	16QAM	1	74	21.40	0	-0.1	
	1747.5	20325	15	16QAM	36	0	21.13	0	-0.2	
	1747.5	20325	15	16QAM	36	18	21.09	0	-0.2	
	1747.5	20325	15	16QAM	36	37	21.05	0	-0.2	
	1747.5	20325	15	16QAM	75	0	21.03	0	-0.2	

Table 9-25
Reduced LTE Band 4 (AWS) Conducted Powers -10 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]	
Low	1715	20000	10	QPSK	1	0	21.43	0	0	
	1715	20000	10	QPSK	1	25	21.36	0	0	
	1715	20000	10	QPSK	1	49	21.39	0	0	
	1715	20000	10	QPSK	25	0	21.28	0	-0.1	
	1715	20000	10	QPSK	25	12	21.26	0	-0.1	
	1715	20000	10	QPSK	25	25	21.22	0	-0.1	
	1715	20000	10	QPSK	50	0	21.10	0	-0.1	
	1715	20000	10	16QAM	1	0	21.19	0	-0.1	
	1715	20000	10	16QAM	1	25	21.22	0	-0.1	
	1715	20000	10	16QAM	1	49	21.18	0	-0.1	
	1715	20000	10	16QAM	25	0	21.24	0	-0.2	
	1715	20000	10	16QAM	25	12	21.25	0	-0.2	
	1715	20000	10	16QAM	25	25	21.22	0	-0.2	
	1715	20000	10	16QAM	50	0	21.11	0	-0.2	
	Mid	1732.5	20175	10	QPSK	1	0	21.21	0	0
		1732.5	20175	10	QPSK	1	25	21.18	0	0
		1732.5	20175	10	QPSK	1	49	21.20	0	0
		1732.5	20175	10	QPSK	25	0	21.20	0	-0.1
1732.5		20175	10	QPSK	25	12	21.17	0	-0.1	
1732.5		20175	10	QPSK	25	25	21.19	0	-0.1	
1732.5		20175	10	QPSK	50	0	21.10	0	-0.1	
1732.5		20175	10	16QAM	1	0	21.22	0	-0.1	
1732.5		20175	10	16QAM	1	25	21.15	0	-0.1	
1732.5		20175	10	16QAM	1	49	21.18	0	-0.1	
1732.5		20175	10	16QAM	25	0	21.17	0	-0.2	
1732.5		20175	10	16QAM	25	12	21.18	0	-0.2	
1732.5		20175	10	16QAM	25	25	21.18	0	-0.2	
1732.5		20175	10	16QAM	50	0	21.02	0	-0.2	
High		1750	20350	10	QPSK	1	0	21.29	0	0
		1750	20350	10	QPSK	1	25	21.23	0	0
		1750	20350	10	QPSK	1	49	21.29	0	0
		1750	20350	10	QPSK	25	0	21.18	0	-0.1
	1750	20350	10	QPSK	25	12	21.10	0	-0.1	
	1750	20350	10	QPSK	25	25	21.16	0	-0.1	
	1750	20350	10	QPSK	50	0	21.13	0	-0.1	
	1750	20350	10	16QAM	1	0	21.14	0	-0.1	
	1750	20350	10	16QAM	1	25	21.11	0	-0.1	
	1750	20350	10	16QAM	1	49	21.16	0	-0.1	
	1750	20350	10	16QAM	25	0	21.20	0	-0.2	
	1750	20350	10	16QAM	25	12	21.13	0	-0.2	
	1750	20350	10	16QAM	25	25	21.15	0	-0.2	
	1750	20350	10	16QAM	50	0	21.18	0	-0.2	

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 39 of 91

Table 9-26
Reduced LTE Band 4 (AWS) Conducted Powers -5 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1712.5	19975	5	QPSK	1	0	21.46	0	0
	1712.5	19975	5	QPSK	1	12	21.45	0	0
	1712.5	19975	5	QPSK	1	24	21.46	0	0
	1712.5	19975	5	QPSK	12	0	21.32	0	0-1
	1712.5	19975	5	QPSK	12	6	21.31	0	0-1
	1712.5	19975	5	QPSK	12	13	21.36	0	0-1
	1712.5	19975	5	QPSK	25	0	21.25	0	0-1
	1712.5	19975	5	16-QAM	1	0	21.36	0	0-1
	1712.5	19975	5	16-QAM	1	12	21.35	0	0-1
	1712.5	19975	5	16-QAM	1	24	21.36	0	0-1
	1712.5	19975	5	16-QAM	12	0	21.45	0	0-2
	1712.5	19975	5	16-QAM	12	6	21.44	0	0-2
	1712.5	19975	5	16-QAM	12	13	21.44	0	0-2
	1712.5	19975	5	16-QAM	25	0	21.23	0	0-2
	1732.5	20175	5	QPSK	1	0	21.20	0	0
1732.5	20175	5	QPSK	1	12	21.19	0	0	
1732.5	20175	5	QPSK	1	24	21.19	0	0	
1732.5	20175	5	QPSK	12	0	21.24	0	0-1	
1732.5	20175	5	QPSK	12	6	21.25	0	0-1	
1732.5	20175	5	QPSK	12	13	21.20	0	0-1	
1732.5	20175	5	QPSK	25	0	21.17	0	0-1	
1732.5	20175	5	16-QAM	1	0	21.07	0	0-1	
1732.5	20175	5	16-QAM	1	12	21.05	0	0-1	
1732.5	20175	5	16-QAM	1	24	21.04	0	0-1	
1732.5	20175	5	16-QAM	12	0	21.27	0	0-2	
1732.5	20175	5	16-QAM	12	6	21.30	0	0-2	
1732.5	20175	5	16-QAM	12	13	21.28	0	0-2	
1732.5	20175	5	16-QAM	25	0	21.13	0	0-2	
Mid	1752.5	20375	5	QPSK	1	0	21.46	0	0
	1752.5	20375	5	QPSK	1	12	21.43	0	0
	1752.5	20375	5	QPSK	1	24	21.48	0	0
	1752.5	20375	5	QPSK	12	0	21.25	0	0-1
	1752.5	20375	5	QPSK	12	6	21.28	0	0-1
	1752.5	20375	5	QPSK	12	13	21.35	0	0-1
	1752.5	20375	5	QPSK	25	0	21.25	0	0-1
	1752.5	20375	5	16-QAM	1	0	21.25	0	0-1
	1752.5	20375	5	16-QAM	1	12	21.20	0	0-1
	1752.5	20375	5	16-QAM	1	24	21.13	0	0-1
	1752.5	20375	5	16-QAM	12	0	21.22	0	0-2
	1752.5	20375	5	16-QAM	12	6	21.22	0	0-2
	1752.5	20375	5	16-QAM	12	13	21.28	0	0-2
	1752.5	20375	5	16-QAM	25	0	21.20	0	0-2
	1752.5	20375	5	16-QAM	25	0	21.20	0	0-2
High	1711.5	19965	3	QPSK	1	0	21.38	0	0
	1711.5	19965	3	QPSK	1	7	21.38	0	0
	1711.5	19965	3	QPSK	1	14	21.40	0	0
	1711.5	19965	3	QPSK	8	0	21.38	0	0-1
	1711.5	19965	3	QPSK	8	4	21.36	0	0-1
	1711.5	19965	3	QPSK	8	7	21.37	0	0-1
	1711.5	19965	3	QPSK	15	0	21.33	0	0-1
	1711.5	19965	3	16-QAM	1	0	21.39	0	0-1
	1711.5	19965	3	16-QAM	1	7	21.33	0	0-1
	1711.5	19965	3	16-QAM	1	14	21.29	0	0-1
	1711.5	19965	3	16-QAM	8	0	21.42	0	0-2
	1711.5	19965	3	16-QAM	8	4	21.37	0	0-2
	1711.5	19965	3	16-QAM	8	7	21.39	0	0-2
	1711.5	19965	3	16-QAM	15	0	21.34	0	0-2
	1732.5	20175	3	QPSK	1	0	21.21	0	0
1732.5	20175	3	QPSK	1	7	21.17	0	0	
1732.5	20175	3	QPSK	1	14	21.18	0	0	
1732.5	20175	3	QPSK	8	0	21.24	0	0-1	
1732.5	20175	3	QPSK	8	4	21.26	0	0-1	
1732.5	20175	3	QPSK	8	7	21.26	0	0-1	
1732.5	20175	3	QPSK	15	0	21.23	0	0-1	
1732.5	20175	3	16-QAM	1	0	21.14	0	0-1	
1732.5	20175	3	16-QAM	1	7	21.11	0	0-1	
1732.5	20175	3	16-QAM	1	14	21.20	0	0-1	
1732.5	20175	3	16-QAM	8	0	21.33	0	0-2	
1732.5	20175	3	16-QAM	8	4	21.31	0	0-2	
1732.5	20175	3	16-QAM	8	7	21.30	0	0-2	
1732.5	20175	3	16-QAM	15	0	21.23	0	0-2	
High	1753.5	20385	3	QPSK	1	0	21.21	0	0
	1753.5	20385	3	QPSK	1	7	21.27	0	0
	1753.5	20385	3	QPSK	1	14	21.35	0	0
	1753.5	20385	3	QPSK	8	0	21.35	0	0-1
	1753.5	20385	3	QPSK	8	4	21.38	0	0-1
	1753.5	20385	3	QPSK	8	7	21.33	0	0-1
	1753.5	20385	3	QPSK	15	0	21.31	0	0-1
	1753.5	20385	3	16-QAM	1	0	21.33	0	0-1
	1753.5	20385	3	16-QAM	1	7	21.27	0	0-1
	1753.5	20385	3	16-QAM	1	14	21.39	0	0-1
	1753.5	20385	3	16-QAM	8	0	21.41	0	0-2
	1753.5	20385	3	16-QAM	8	4	21.45	0	0-2
	1753.5	20385	3	16-QAM	8	7	21.43	0	0-2
	1753.5	20385	3	16-QAM	15	0	21.32	0	0-2

Table 9-27
Reduced LTE Band 4 (AWS) Conducted Powers -3 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1711.5	19965	3	QPSK	1	0	21.38	0	0
	1711.5	19965	3	QPSK	1	7	21.38	0	0
	1711.5	19965	3	QPSK	1	14	21.40	0	0
	1711.5	19965	3	QPSK	8	0	21.38	0	0-1
	1711.5	19965	3	QPSK	8	4	21.36	0	0-1
	1711.5	19965	3	QPSK	8	7	21.37	0	0-1
	1711.5	19965	3	QPSK	15	0	21.33	0	0-1
	1711.5	19965	3	16-QAM	1	0	21.39	0	0-1
	1711.5	19965	3	16-QAM	1	7	21.33	0	0-1
	1711.5	19965	3	16-QAM	1	14	21.29	0	0-1
	1711.5	19965	3	16-QAM	8	0	21.42	0	0-2
	1711.5	19965	3	16-QAM	8	4	21.37	0	0-2
	1711.5	19965	3	16-QAM	8	7	21.39	0	0-2
	1711.5	19965	3	16-QAM	15	0	21.34	0	0-2
	Mid	1732.5	20175	3	QPSK	1	0	21.21	0
1732.5		20175	3	QPSK	1	7	21.17	0	0
1732.5		20175	3	QPSK	1	14	21.18	0	0
1732.5		20175	3	QPSK	8	0	21.24	0	0-1
1732.5		20175	3	QPSK	8	4	21.26	0	0-1
1732.5		20175	3	QPSK	8	7	21.26	0	0-1
1732.5		20175	3	QPSK	15	0	21.23	0	0-1
1732.5		20175	3	16-QAM	1	0	21.14	0	0-1
1732.5		20175	3	16-QAM	1	7	21.11	0	0-1
1732.5		20175	3	16-QAM	1	14	21.20	0	0-1
1732.5		20175	3	16-QAM	8	0	21.33	0	0-2
1732.5		20175	3	16-QAM	8	4	21.31	0	0-2
1732.5		20175	3	16-QAM	8	7	21.30	0	0-2
1732.5		20175	3	16-QAM	15	0	21.23	0	0-2
High		1753.5	20385	3	QPSK	1	0	21.21	0
	1753.5	20385	3	QPSK	1	7	21.27	0	0
	1753.5	20385	3	QPSK	1	14	21.35	0	0
	1753.5	20385	3	QPSK	8	0	21.35	0	0-1
	1753.5	20385	3	QPSK	8	4	21.38	0	0-1
	1753.5	20385	3	QPSK	8	7	21.33	0	0-1
	1753.5	20385	3	QPSK	15	0	21.31	0	0-1
	1753.5	20385	3	16-QAM	1	0	21.33	0	0-1
	1753.5	20385	3	16-QAM	1	7	21.27	0	0-1
	1753.5	20385	3	16-QAM	1	14	21.39	0	0-1
	1753.5	20385	3	16-QAM	8	0	21.41	0	0-2
	1753.5	20385	3	16-QAM	8	4	21.45	0	0-2
	1753.5	20385	3	16-QAM	8	7	21.43	0	0-2
	1753.5	20385	3	16-QAM	15	0	21.32	0	0-2

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 40 of 91

Table 9-28
Reduced LTE Band 4 (AWS) Conducted Powers -1.4 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	1710.7	19957	1.4	QPSK	1	0	21.40	0	0
	1710.7	19957	1.4	QPSK	1	2	21.42	0	0
	1710.7	19957	1.4	QPSK	1	5	21.44	0	0
	1710.7	19957	1.4	QPSK	3	0	21.42	0	0
	1710.7	19957	1.4	QPSK	3	2	21.40	0	0
	1710.7	19957	1.4	QPSK	3	3	21.41	0	0
	1710.7	19957	1.4	QPSK	6	0	21.37	0	0-1
	1710.7	19957	1.4	16-QAM	1	0	21.43	0	0-1
	1710.7	19957	1.4	16-QAM	1	2	21.37	0	0-1
	1710.7	19957	1.4	16-QAM	1	5	21.33	0	0-1
	1710.7	19957	1.4	16-QAM	3	0	21.46	0	0-1
	1710.7	19957	1.4	16-QAM	3	2	21.41	0	0-1
	1710.7	19957	1.4	16-QAM	3	3	21.43	0	0-1
	1710.7	19957	1.4	16-QAM	6	0	21.38	0	0-2
	1732.5	20175	1.4	QPSK	1	0	21.31	0	0
1732.5	20175	1.4	QPSK	1	2	21.29	0	0	
1732.5	20175	1.4	QPSK	1	5	21.35	0	0	
1732.5	20175	1.4	QPSK	3	0	21.29	0	0	
1732.5	20175	1.4	QPSK	3	2	21.24	0	0	
1732.5	20175	1.4	QPSK	3	3	21.23	0	0	
1732.5	20175	1.4	QPSK	6	0	21.28	0	0-1	
1732.5	20175	1.4	16-QAM	1	0	21.34	0	0-1	
1732.5	20175	1.4	16-QAM	1	2	21.35	0	0-1	
1732.5	20175	1.4	16-QAM	1	5	21.38	0	0-1	
1732.5	20175	1.4	16-QAM	3	0	21.34	0	0-1	
1732.5	20175	1.4	16-QAM	3	2	21.28	0	0-1	
1732.5	20175	1.4	16-QAM	3	3	21.33	0	0-1	
1732.5	20175	1.4	16-QAM	6	0	21.45	0	0-2	
High	1754.3	20393	1.4	QPSK	1	0	21.31	0	0
	1754.3	20393	1.4	QPSK	1	2	21.35	0	0
	1754.3	20393	1.4	QPSK	1	5	21.40	0	0
	1754.3	20393	1.4	QPSK	3	0	21.39	0	0
	1754.3	20393	1.4	QPSK	3	2	21.39	0	0
	1754.3	20393	1.4	QPSK	3	3	21.37	0	0
	1754.3	20393	1.4	QPSK	6	0	21.34	0	0-1
	1754.3	20393	1.4	16-QAM	1	0	21.38	0	0-1
	1754.3	20393	1.4	16-QAM	1	2	21.32	0	0-1
	1754.3	20393	1.4	16-QAM	1	5	21.36	0	0-1
	1754.3	20393	1.4	16-QAM	3	0	21.44	0	0-1
	1754.3	20393	1.4	16-QAM	3	2	21.43	0	0-1
	1754.3	20393	1.4	16-QAM	3	3	21.43	0	0-1
	1754.3	20393	1.4	16-QAM	6	0	21.35	0	0-2

9.3.3 LTE Band 5 (Cell)

Table 9-29
LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Mid	836.5	20525	10	QPSK	1	0	22.77	0	0
	836.5	20525	10	QPSK	1	25	22.76	0	0
	836.5	20525	10	QPSK	1	49	22.82	0	0
	836.5	20525	10	QPSK	25	0	21.58	1	0-1
	836.5	20525	10	QPSK	25	12	21.57	1	0-1
	836.5	20525	10	QPSK	25	25	21.54	1	0-1
	836.5	20525	10	QPSK	50	0	21.51	1	0-1
	836.5	20525	10	16QAM	1	0	21.64	1	0-1
	836.5	20525	10	16QAM	1	25	21.60	1	0-1
	836.5	20525	10	16QAM	1	49	21.63	1	0-1
	836.5	20525	10	16QAM	25	0	20.59	2	0-2
	836.5	20525	10	16QAM	25	12	20.57	2	0-2
	836.5	20525	10	16QAM	25	25	20.58	2	0-2
	836.5	20525	10	16QAM	50	0	20.53	2	0-2

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 41 of 91

Table 9-30
LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	826.5	20425	5	QPSK	1	0	22.63	0	0
	826.5	20425	5	QPSK	1	12	22.68	0	0
	826.5	20425	5	QPSK	1	24	22.66	0	0
	826.5	20425	5	QPSK	12	0	21.64	1	0-1
	826.5	20425	5	QPSK	12	6	21.59	1	0-1
	826.5	20425	5	QPSK	12	13	21.61	1	0-1
	826.5	20425	5	QPSK	25	0	21.49	1	0-1
	826.5	20425	5	16-QAM	1	0	21.65	1	0-1
	826.5	20425	5	16-QAM	1	12	21.64	1	0-1
	826.5	20425	5	16-QAM	1	24	21.67	1	0-1
	826.5	20425	5	16-QAM	12	0	20.76	2	0-2
	826.5	20425	5	16-QAM	12	6	20.70	2	0-2
	826.5	20425	5	16-QAM	12	13	20.73	2	0-2
	826.5	20425	5	16-QAM	25	0	20.51	2	0-2
	836.5	20525	5	QPSK	1	0	22.71	0	0
	836.5	20525	5	QPSK	1	12	22.69	0	0
	836.5	20525	5	QPSK	1	24	22.68	0	0
	836.5	20525	5	QPSK	12	0	21.68	1	0-1
	836.5	20525	5	QPSK	12	6	21.62	1	0-1
	836.5	20525	5	QPSK	12	13	21.61	1	0-1
836.5	20525	5	QPSK	25	0	21.57	1	0-1	
836.5	20525	5	16-QAM	1	0	21.73	1	0-1	
836.5	20525	5	16-QAM	1	12	21.72	1	0-1	
836.5	20525	5	16-QAM	1	24	21.69	1	0-1	
836.5	20525	5	16-QAM	12	0	20.78	2	0-2	
836.5	20525	5	16-QAM	12	6	20.76	2	0-2	
836.5	20525	5	16-QAM	12	13	20.73	2	0-2	
836.5	20525	5	16-QAM	25	0	20.68	2	0-2	
High	846.5	20625	5	QPSK	1	0	22.65	0	0
	846.5	20625	5	QPSK	1	12	22.59	0	0
	846.5	20625	5	QPSK	1	24	22.60	0	0
	846.5	20625	5	QPSK	12	0	21.72	1	0-1
	846.5	20625	5	QPSK	12	6	21.64	1	0-1
	846.5	20625	5	QPSK	12	13	21.69	1	0-1
	846.5	20625	5	QPSK	25	0	21.64	1	0-1
	846.5	20625	5	16-QAM	1	0	21.53	1	0-1
	846.5	20625	5	16-QAM	1	12	21.47	1	0-1
	846.5	20625	5	16-QAM	1	24	21.49	1	0-1
	846.5	20625	5	16-QAM	12	0	20.60	2	0-2
	846.5	20625	5	16-QAM	12	6	20.61	2	0-2
	846.5	20625	5	16-QAM	12	13	20.65	2	0-2
	846.5	20625	5	16-QAM	25	0	20.61	2	0-2

Table 9-31
LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	825.5	20415	3	QPSK	1	0	22.68	0	0
	825.5	20415	3	QPSK	1	7	22.69	0	0
	825.5	20415	3	QPSK	1	14	22.59	0	0
	825.5	20415	3	QPSK	8	0	21.64	1	0-1
	825.5	20415	3	QPSK	8	4	21.68	1	0-1
	825.5	20415	3	QPSK	8	7	21.54	1	0-1
	825.5	20415	3	QPSK	15	0	21.63	1	0-1
	825.5	20415	3	16-QAM	1	0	21.62	1	0-1
	825.5	20415	3	16-QAM	1	7	21.65	1	0-1
	825.5	20415	3	16-QAM	1	14	21.60	1	0-1
	825.5	20415	3	16-QAM	8	0	20.74	2	0-2
	825.5	20415	3	16-QAM	8	4	20.69	2	0-2
	825.5	20415	3	16-QAM	8	7	20.65	2	0-2
	825.5	20415	3	16-QAM	15	0	20.65	2	0-2
	836.5	20525	3	QPSK	1	0	22.73	0	0
	836.5	20525	3	QPSK	1	7	22.70	0	0
	836.5	20525	3	QPSK	1	14	22.69	0	0
	836.5	20525	3	QPSK	8	0	21.67	1	0-1
	836.5	20525	3	QPSK	8	4	21.63	1	0-1
	836.5	20525	3	QPSK	8	7	21.65	1	0-1
836.5	20525	3	QPSK	15	0	21.66	1	0-1	
836.5	20525	3	16-QAM	1	0	21.62	1	0-1	
836.5	20525	3	16-QAM	1	7	21.53	1	0-1	
836.5	20525	3	16-QAM	1	14	21.56	1	0-1	
836.5	20525	3	16-QAM	8	0	20.76	2	0-2	
836.5	20525	3	16-QAM	8	4	20.72	2	0-2	
836.5	20525	3	16-QAM	8	7	20.75	2	0-2	
836.5	20525	3	16-QAM	15	0	20.72	2	0-2	
High	847.5	20635	3	QPSK	1	0	22.66	0	0
	847.5	20635	3	QPSK	1	7	22.72	0	0
	847.5	20635	3	QPSK	1	14	22.64	0	0
	847.5	20635	3	QPSK	8	0	21.76	1	0-1
	847.5	20635	3	QPSK	8	4	21.73	1	0-1
	847.5	20635	3	QPSK	8	7	21.67	1	0-1
	847.5	20635	3	QPSK	15	0	21.74	1	0-1
	847.5	20635	3	16-QAM	1	0	21.66	1	0-1
	847.5	20635	3	16-QAM	1	7	21.74	1	0-1
	847.5	20635	3	16-QAM	1	14	21.70	1	0-1
	847.5	20635	3	16-QAM	8	0	20.87	2	0-2
	847.5	20635	3	16-QAM	8	4	20.85	2	0-2
	847.5	20635	3	16-QAM	8	7	20.81	2	0-2
	847.5	20635	3	16-QAM	15	0	20.70	2	0-2

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 42 of 91

Table 9-32
LTE Band 5 (Cell) Conducted Powers -1.4 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	824.7	20407	1.4	QPSK	1	0	22.73	0	0
	824.7	20407	1.4	QPSK	1	2	22.81	0	0
	824.7	20407	1.4	QPSK	1	5	22.69	0	0
	824.7	20407	1.4	QPSK	3	0	22.55	0	0
	824.7	20407	1.4	QPSK	3	2	22.54	0	0
	824.7	20407	1.4	QPSK	3	3	22.53	0	0
	824.7	20407	1.4	QPSK	6	0	21.66	1	0-1
	824.7	20407	1.4	16-QAM	1	0	21.60	1	0-1
	824.7	20407	1.4	16-QAM	1	2	21.65	1	0-1
	824.7	20407	1.4	16-QAM	1	5	21.68	1	0-1
	824.7	20407	1.4	16-QAM	3	0	21.51	1	0-1
	824.7	20407	1.4	16-QAM	3	2	21.55	1	0-1
	824.7	20407	1.4	16-QAM	3	3	21.42	1	0-1
	824.7	20407	1.4	16-QAM	6	0	20.66	2	0-2
Mid	836.5	20525	1.4	QPSK	1	0	22.65	0	0
	836.5	20525	1.4	QPSK	1	2	22.61	0	0
	836.5	20525	1.4	QPSK	1	5	22.64	0	0
	836.5	20525	1.4	QPSK	3	0	22.57	0	0
	836.5	20525	1.4	QPSK	3	2	22.66	0	0
	836.5	20525	1.4	QPSK	3	3	22.68	0	0
	836.5	20525	1.4	QPSK	6	0	21.67	1	0-1
	836.5	20525	1.4	16-QAM	1	0	21.51	1	0-1
	836.5	20525	1.4	16-QAM	1	2	21.44	1	0-1
	836.5	20525	1.4	16-QAM	1	5	21.47	1	0-1
	836.5	20525	1.4	16-QAM	3	0	21.69	1	0-1
	836.5	20525	1.4	16-QAM	3	2	21.68	1	0-1
	836.5	20525	1.4	16-QAM	3	3	21.72	1	0-1
	836.5	20525	1.4	16-QAM	6	0	20.75	2	0-2
High	848.3	20643	1.4	QPSK	1	0	22.67	0	0
	848.3	20643	1.4	QPSK	1	2	22.71	0	0
	848.3	20643	1.4	QPSK	1	5	22.66	0	0
	848.3	20643	1.4	QPSK	3	0	22.62	0	0
	848.3	20643	1.4	QPSK	3	2	22.61	0	0
	848.3	20643	1.4	QPSK	3	3	22.62	0	0
	848.3	20643	1.4	QPSK	6	0	21.72	1	0-1
	848.3	20643	1.4	16-QAM	1	0	21.78	1	0-1
	848.3	20643	1.4	16-QAM	1	2	21.73	1	0-1
	848.3	20643	1.4	16-QAM	1	5	21.68	1	0-1
	848.3	20643	1.4	16-QAM	3	0	21.70	1	0-1
	848.3	20643	1.4	16-QAM	3	2	21.69	1	0-1
	848.3	20643	1.4	16-QAM	3	3	21.74	1	0-1
	848.3	20643	1.4	16-QAM	6	0	20.73	2	0-2

9.3.4 LTE Band 17

Table 9-33
LTE Band 17 Conducted Powers - 10 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Mid	710.0	23790	10	QPSK	1	0	23.13	0	0
	710.0	23790	10	QPSK	1	25	23.07	0	0
	710.0	23790	10	QPSK	1	49	23.12	0	0
	710.0	23790	10	QPSK	25	0	22.05	1	0-1
	710.0	23790	10	QPSK	25	12	22.06	1	0-1
	710.0	23790	10	QPSK	25	25	22.12	1	0-1
	710.0	23790	10	QPSK	50	0	22.01	1	0-1
	710.0	23790	10	16QAM	1	0	22.11	1	0-1
	710.0	23790	10	16QAM	1	25	22.02	1	0-1
	710.0	23790	10	16QAM	1	49	22.10	1	0-1
	710.0	23790	10	16QAM	25	0	21.15	2	0-2
	710.0	23790	10	16QAM	25	12	21.08	2	0-2
	710.0	23790	10	16QAM	25	25	21.17	2	0-2
	710.0	23790	10	16QAM	50	0	21.01	2	0-2

Note: LTE Band 17 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 43 of 91

Table 9-34
LTE Band 17 Conducted Powers - 5 MHz Bandwidth

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Mid	710.0	23790	5	QPSK	1	0	23.10	0	0
	710.0	23790	5	QPSK	1	12	23.09	0	0
	710.0	23790	5	QPSK	1	24	23.15	0	0
	710.0	23790	5	QPSK	12	0	22.10	1	0-1
	710.0	23790	5	QPSK	12	6	22.11	1	0-1
	710.0	23790	5	QPSK	12	13	22.08	1	0-1
	710.0	23790	5	QPSK	25	0	22.03	1	0-1
	710.0	23790	5	16-QAM	1	0	22.09	1	0-1
	710.0	23790	5	16-QAM	1	12	22.12	1	0-1
	710.0	23790	5	16-QAM	1	24	22.19	1	0-1
	710.0	23790	5	16-QAM	12	0	21.22	2	0-2
	710.0	23790	5	16-QAM	12	6	21.25	2	0-2
	710.0	23790	5	16-QAM	12	13	21.27	2	0-2
	710.0	23790	5	16-QAM	25	0	21.13	2	0-2

9.3.5 LTE Band 7

Table 9-35
Maximum LTE Band 7 Conducted Powers - 20 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]	
Low	2510	20850	20	QPSK	1	0	22.60	0	0	
	2510	20850	20	QPSK	1	50	22.77	0	0	
	2510	20850	20	QPSK	1	99	22.60	0	0	
	2510	20850	20	QPSK	50	0	21.63	1	0-1	
	2510	20850	20	QPSK	50	25	21.54	1	0-1	
	2510	20850	20	QPSK	50	50	21.61	1	0-1	
	2510	20850	20	QPSK	100	0	21.52	1	0-1	
	2510	20850	20	16QAM	1	0	21.54	1	0-1	
	2510	20850	20	16QAM	1	50	21.57	1	0-1	
	2510	20850	20	16QAM	1	99	21.60	1	0-1	
	2510	20850	20	16QAM	50	0	20.51	2	0-2	
	2510	20850	20	16QAM	50	25	20.53	2	0-2	
	2510	20850	20	16QAM	50	50	20.54	2	0-2	
	2510	20850	20	16QAM	100	0	20.62	2	0-2	
	Mid	2535.0	21100	20	QPSK	1	0	22.56	0	0
		2535.0	21100	20	QPSK	1	50	22.58	0	0
		2535.0	21100	20	QPSK	1	99	22.60	0	0
		2535.0	21100	20	QPSK	50	0	21.55	1	0-1
		2535.0	21100	20	QPSK	50	25	21.51	1	0-1
		2535.0	21100	20	QPSK	50	50	21.52	1	0-1
2535.0		21100	20	QPSK	100	0	21.55	1	0-1	
2535.0		21100	20	16QAM	1	0	21.60	1	0-1	
2535.0		21100	20	16QAM	1	50	21.61	1	0-1	
2535.0		21100	20	16QAM	1	99	21.66	1	0-1	
2535.0		21100	20	16QAM	50	0	20.52	2	0-2	
2535.0		21100	20	16QAM	50	25	20.50	2	0-2	
2535.0		21100	20	16QAM	50	50	20.50	2	0-2	
2535.0		21100	20	16QAM	100	0	20.51	2	0-2	
High	2560	21350	20	QPSK	1	0	22.50	0	0	
	2560	21350	20	QPSK	1	50	22.51	0	0	
	2560	21350	20	QPSK	1	99	22.75	0	0	
	2560	21350	20	QPSK	50	0	21.51	1	0-1	
	2560	21350	20	QPSK	50	25	21.52	1	0-1	
	2560	21350	20	QPSK	50	50	21.51	1	0-1	
	2560	21350	20	QPSK	100	0	21.51	1	0-1	
	2560	21350	20	16QAM	1	0	21.68	1	0-1	
	2560	21350	20	16QAM	1	50	21.72	1	0-1	
	2560	21350	20	16QAM	1	99	21.66	1	0-1	
	2560	21350	20	16QAM	50	0	20.51	2	0-2	
	2560	21350	20	16QAM	50	25	20.50	2	0-2	
	2560	21350	20	16QAM	50	50	20.56	2	0-2	
	2560	21350	20	16QAM	100	0	20.53	2	0-2	

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 44 of 91

Table 9-36
Maximum LTE Band 7 Conducted Powers - 15 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]	
Low	2507.5	20825	15	QPSK	1	0	22.55	0	0	
	2507.5	20825	15	QPSK	1	36	22.51	0	0	
	2507.5	20825	15	QPSK	1	74	22.51	0	0	
	2507.5	20825	15	QPSK	36	0	21.54	1	0-1	
	2507.5	20825	15	QPSK	36	18	21.58	1	0-1	
	2507.5	20825	15	QPSK	36	37	21.50	1	0-1	
	2507.5	20825	15	QPSK	75	0	21.56	1	0-1	
	2507.5	20825	15	16QAM	1	0	21.51	1	0-1	
	2507.5	20825	15	16QAM	1	36	21.60	1	0-1	
	2507.5	20825	15	16QAM	1	74	21.53	1	0-1	
	2507.5	20825	15	16QAM	36	0	20.56	2	0-2	
	2507.5	20825	15	16QAM	36	18	20.53	2	0-2	
	2507.5	20825	15	16QAM	36	37	20.50	2	0-2	
	2507.5	20825	15	16QAM	75	0	20.54	2	0-2	
	Mid	2535.0	21100	15	QPSK	1	0	22.50	0	0
		2535.0	21100	15	QPSK	1	36	22.53	0	0
		2535.0	21100	15	QPSK	1	74	22.52	0	0
		2535.0	21100	15	QPSK	36	0	21.54	1	0-1
2535.0		21100	15	QPSK	36	18	21.50	1	0-1	
2535.0		21100	15	QPSK	36	37	21.53	1	0-1	
2535.0		21100	15	QPSK	75	0	21.51	1	0-1	
2535.0		21100	15	16QAM	1	0	21.57	1	0-1	
2535.0		21100	15	16QAM	1	36	21.50	1	0-1	
2535.0		21100	15	16QAM	1	74	21.58	1	0-1	
2535.0		21100	15	16QAM	36	0	20.57	2	0-2	
2535.0		21100	15	16QAM	36	18	20.54	2	0-2	
2535.0		21100	15	16QAM	36	37	20.50	2	0-2	
2535.0		21100	15	16QAM	75	0	20.56	2	0-2	
High		2562.5	21375	15	QPSK	1	0	22.53	0	0
		2562.5	21375	15	QPSK	1	36	22.55	0	0
		2562.5	21375	15	QPSK	1	74	22.51	0	0
		2562.5	21375	15	QPSK	36	0	21.56	1	0-1
	2562.5	21375	15	QPSK	36	18	21.61	1	0-1	
	2562.5	21375	15	QPSK	36	37	21.53	1	0-1	
	2562.5	21375	15	QPSK	75	0	21.55	1	0-1	
	2562.5	21375	15	16QAM	1	0	21.57	1	0-1	
	2562.5	21375	15	16QAM	1	36	21.54	1	0-1	
	2562.5	21375	15	16QAM	1	74	21.59	1	0-1	
	2562.5	21375	15	16QAM	36	0	20.58	2	0-2	
	2562.5	21375	15	16QAM	36	18	20.61	2	0-2	
	2562.5	21375	15	16QAM	36	37	20.57	2	0-2	
	2562.5	21375	15	16QAM	75	0	20.53	2	0-2	

Table 9-37
Maximum LTE Band 7 Conducted Powers - 10 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]	
Low	2505	20800	10	QPSK	1	0	22.54	0	0	
	2505	20800	10	QPSK	1	25	22.52	0	0	
	2505	20800	10	QPSK	1	49	22.51	0	0	
	2505	20800	10	QPSK	25	0	21.54	1	0-1	
	2505	20800	10	QPSK	25	12	21.57	1	0-1	
	2505	20800	10	QPSK	25	25	21.53	1	0-1	
	2505	20800	10	QPSK	50	0	21.50	1	0-1	
	2505	20800	10	16QAM	1	0	21.52	1	0-1	
	2505	20800	10	16QAM	1	25	21.51	1	0-1	
	2505	20800	10	16QAM	1	49	21.53	1	0-1	
	2505	20800	10	16QAM	25	0	20.50	2	0-2	
	2505	20800	10	16QAM	25	12	20.51	2	0-2	
	2505	20800	10	16QAM	25	25	20.51	2	0-2	
	2505	20800	10	16QAM	50	0	20.52	2	0-2	
	Mid	2535.0	21100	10	QPSK	1	0	22.52	0	0
		2535.0	21100	10	QPSK	1	25	22.51	0	0
		2535.0	21100	10	QPSK	1	49	22.54	0	0
		2535.0	21100	10	QPSK	25	0	21.56	1	0-1
2535.0		21100	10	QPSK	25	12	21.52	1	0-1	
2535.0		21100	10	QPSK	25	25	21.58	1	0-1	
2535.0		21100	10	QPSK	50	0	21.56	1	0-1	
2535.0		21100	10	16QAM	1	0	21.53	1	0-1	
2535.0		21100	10	16QAM	1	25	21.50	1	0-1	
2535.0		21100	10	16QAM	1	49	21.53	1	0-1	
2535.0		21100	10	16QAM	25	0	20.58	2	0-2	
2535.0		21100	10	16QAM	25	12	20.54	2	0-2	
2535.0		21100	10	16QAM	25	25	20.57	2	0-2	
2535.0		21100	10	16QAM	50	0	20.64	2	0-2	
High		2565	21400	10	QPSK	1	0	22.54	0	0
		2565	21400	10	QPSK	1	25	22.63	0	0
		2565	21400	10	QPSK	1	49	22.65	0	0
		2565	21400	10	QPSK	25	0	21.54	1	0-1
	2565	21400	10	QPSK	25	12	21.56	1	0-1	
	2565	21400	10	QPSK	25	25	21.53	1	0-1	
	2565	21400	10	QPSK	50	0	21.51	1	0-1	
	2565	21400	10	16QAM	1	0	21.55	1	0-1	
	2565	21400	10	16QAM	1	25	21.57	1	0-1	
	2565	21400	10	16QAM	1	49	21.53	1	0-1	
	2565	21400	10	16QAM	25	0	20.50	2	0-2	
	2565	21400	10	16QAM	25	12	20.58	2	0-2	
	2565	21400	10	16QAM	25	25	20.58	2	0-2	
	2565	21400	10	16QAM	50	0	20.51	2	0-2	

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 45 of 91

Table 9-38
Maximum LTE Band 7 Conducted Powers - 5 MHz Bandwidth
(Representing Hotspot Mode Inactive)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]	
Low	2502.5	20775	5	QPSK	1	0	22.56	0	0	
	2502.5	20775	5	QPSK	1	12	22.51	0	0	
	2502.5	20775	5	QPSK	1	24	22.54	0	0	
	2502.5	20775	5	QPSK	12	0	21.58	1	0-1	
	2502.5	20775	5	QPSK	12	6	21.53	1	0-1	
	2502.5	20775	5	QPSK	12	13	21.54	1	0-1	
	2502.5	20775	5	QPSK	25	0	21.55	1	0-1	
	2502.5	20775	5	16-QAM	1	0	21.54	1	0-1	
	2502.5	20775	5	16-QAM	1	12	21.51	1	0-1	
	2502.5	20775	5	16-QAM	1	24	21.55	1	0-1	
	2502.5	20775	5	16-QAM	12	0	20.65	2	0-2	
	2502.5	20775	5	16-QAM	12	6	20.55	2	0-2	
	2502.5	20775	5	16-QAM	12	13	20.56	2	0-2	
	2502.5	20775	5	16-QAM	25	0	20.51	2	0-2	
	Mid	2535.0	21100	5	QPSK	1	0	22.53	0	0
		2535.0	21100	5	QPSK	1	12	22.51	0	0
		2535.0	21100	5	QPSK	1	24	22.52	0	0
		2535.0	21100	5	QPSK	12	0	21.53	1	0-1
2535.0		21100	5	QPSK	12	6	21.50	1	0-1	
2535.0		21100	5	QPSK	12	13	21.58	1	0-1	
2535.0		21100	5	QPSK	25	0	21.58	1	0-1	
2535.0		21100	5	16-QAM	1	0	21.56	1	0-1	
2535.0		21100	5	16-QAM	1	12	21.59	1	0-1	
2535.0		21100	5	16-QAM	1	24	21.58	1	0-1	
2535.0		21100	5	16-QAM	12	0	20.51	2	0-2	
2535.0		21100	5	16-QAM	12	6	20.54	2	0-2	
2535.0		21100	5	16-QAM	12	13	20.57	2	0-2	
2535.0		21100	5	16-QAM	25	0	20.51	2	0-2	
High		2567.5	21425	5	QPSK	1	0	22.66	0	0
		2567.5	21425	5	QPSK	1	12	22.56	0	0
		2567.5	21425	5	QPSK	1	24	22.52	0	0
		2567.5	21425	5	QPSK	12	0	21.57	1	0-1
	2567.5	21425	5	QPSK	12	6	21.56	1	0-1	
	2567.5	21425	5	QPSK	12	13	21.57	1	0-1	
	2567.5	21425	5	QPSK	25	0	21.51	1	0-1	
	2567.5	21425	5	16-QAM	1	0	21.45	1	0-1	
	2567.5	21425	5	16-QAM	1	12	21.34	1	0-1	
	2567.5	21425	5	16-QAM	1	24	21.38	1	0-1	
	2567.5	21425	5	16-QAM	12	0	20.53	2	0-2	
	2567.5	21425	5	16-QAM	12	6	20.50	2	0-2	
	2567.5	21425	5	16-QAM	12	13	20.50	2	0-2	
	2567.5	21425	5	16-QAM	25	0	20.45	2	0-2	

Table 9-39
Reduced LTE Band 7 Conducted Powers - 20 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]	
Low	2510	20850	20	QPSK	1	0	19.70	0	0	
	2510	20850	20	QPSK	1	49	19.66	0	0	
	2510	20850	20	QPSK	1	99	19.68	0	0	
	2510	20850	20	QPSK	50	0	19.49	0	0-1	
	2510	20850	20	QPSK	50	25	19.51	0	0-1	
	2510	20850	20	QPSK	50	50	19.55	0	0-1	
	2510	20850	20	QPSK	100	0	19.54	0	0-1	
	2510	20850	20	16QAM	1	0	19.77	0	0-1	
	2510	20850	20	16QAM	1	49	19.67	0	0-1	
	2510	20850	20	16QAM	1	99	19.78	0	0-1	
	2510	20850	20	16QAM	50	0	19.45	0	0-2	
	2510	20850	20	16QAM	50	25	19.47	0	0-2	
	2510	20850	20	16QAM	50	50	19.55	0	0-2	
	2510	20850	20	16QAM	100	0	19.51	0	0-2	
	Mid	2535.0	21100	20	QPSK	1	0	19.68	0	0
		2535.0	21100	20	QPSK	1	49	19.65	0	0
		2535.0	21100	20	QPSK	1	99	19.71	0	0
		2535.0	21100	20	QPSK	50	0	19.50	0	0-1
2535.0		21100	20	QPSK	50	25	19.49	0	0-1	
2535.0		21100	20	QPSK	50	50	19.50	0	0-1	
2535.0		21100	20	QPSK	100	0	19.52	0	0-1	
2535.0		21100	20	16QAM	1	0	19.75	0	0-1	
2535.0		21100	20	16QAM	1	49	19.71	0	0-1	
2535.0		21100	20	16QAM	1	99	19.85	0	0-1	
2535.0		21100	20	16QAM	50	0	19.41	0	0-2	
2535.0		21100	20	16QAM	50	25	19.45	0	0-2	
2535.0		21100	20	16QAM	50	50	19.48	0	0-2	
2535.0		21100	20	16QAM	100	0	19.53	0	0-2	
High		2560	21350	20	QPSK	1	0	19.72	0	0
		2560	21350	20	QPSK	1	49	19.69	0	0
		2560	21350	20	QPSK	1	99	19.74	0	0
		2560	21350	20	QPSK	50	0	19.57	0	0-1
	2560	21350	20	QPSK	50	25	19.54	0	0-1	
	2560	21350	20	QPSK	50	50	19.58	0	0-1	
	2560	21350	20	QPSK	100	0	19.56	0	0-1	
	2560	21350	20	16QAM	1	0	19.76	0	0-1	
	2560	21350	20	16QAM	1	49	19.71	0	0-1	
	2560	21350	20	16QAM	1	99	19.80	0	0-1	
	2560	21350	20	16QAM	50	0	19.46	0	0-2	
	2560	21350	20	16QAM	50	25	19.44	0	0-2	
	2560	21350	20	16QAM	50	50	19.50	0	0-2	
	2560	21350	20	16QAM	100	0	19.51	0	0-2	

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 46 of 91

Table 9-40
Reduced LTE Band 7 Conducted Powers - 15 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]	
Low	2507.5	20825	15	QPSK	1	0	19.51	0	0	
	2507.5	20825	15	QPSK	1	36	19.66	0	0	
	2507.5	20825	15	QPSK	1	74	19.60	0	0	
	2507.5	20825	15	QPSK	36	0	19.46	0	0-1	
	2507.5	20825	15	QPSK	36	18	19.48	0	0-1	
	2507.5	20825	15	QPSK	36	37	19.52	0	0-1	
	2507.5	20825	15	QPSK	75	0	19.51	0	0-1	
	2507.5	20825	15	16QAM	1	0	19.74	0	0-1	
	2507.5	20825	15	16QAM	1	36	19.64	0	0-1	
	2507.5	20825	15	16QAM	1	74	19.75	0	0-1	
	2507.5	20825	15	16QAM	36	0	19.42	0	0-2	
	2507.5	20825	15	16QAM	36	18	19.44	0	0-2	
	2507.5	20825	15	16QAM	36	37	19.50	0	0-2	
	2507.5	20825	15	16QAM	75	0	19.48	0	0-2	
	Mid	2535.0	21100	15	QPSK	1	0	19.42	0	0
		2535.0	21100	15	QPSK	1	36	19.31	0	0
		2535.0	21100	15	QPSK	1	74	19.36	0	0
		2535.0	21100	15	QPSK	36	0	19.34	0	0-1
2535.0		21100	15	QPSK	36	18	19.30	0	0-1	
2535.0		21100	15	QPSK	36	37	19.31	0	0-1	
2535.0		21100	15	QPSK	75	0	19.28	0	0-1	
2535.0		21100	15	16QAM	1	0	19.03	0	0-1	
2535.0		21100	15	16QAM	1	36	19.05	0	0-1	
2535.0		21100	15	16QAM	1	74	19.06	0	0-1	
2535.0		21100	15	16QAM	36	0	19.19	0	0-2	
2535.0		21100	15	16QAM	36	18	19.18	0	0-2	
2535.0		21100	15	16QAM	36	37	19.20	0	0-2	
2535.0		21100	15	16QAM	75	0	19.22	0	0-2	
High		2562.5	21375	15	QPSK	1	0	19.68	0	0
		2562.5	21375	15	QPSK	1	36	19.65	0	0
		2562.5	21375	15	QPSK	1	74	19.70	0	0
		2562.5	21375	15	QPSK	36	0	19.53	0	0-1
	2562.5	21375	15	QPSK	36	18	19.50	0	0-1	
	2562.5	21375	15	QPSK	36	37	19.54	0	0-1	
	2562.5	21375	15	QPSK	75	0	19.52	0	0-1	
	2562.5	21375	15	16QAM	1	0	19.72	0	0-1	
	2562.5	21375	15	16QAM	1	36	19.67	0	0-1	
	2562.5	21375	15	16QAM	1	74	19.76	0	0-1	
	2562.5	21375	15	16QAM	36	0	19.42	0	0-2	
	2562.5	21375	15	16QAM	36	18	19.40	0	0-2	
	2562.5	21375	15	16QAM	36	37	19.46	0	0-2	
	2562.5	21375	15	16QAM	75	0	19.47	0	0-2	

Table 9-41
Reduced LTE Band 7 Conducted Powers - 10 MHz Bandwidth
(Representing Hotspot Mode Active)

	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]	
Low	2505	20800	10	QPSK	1	0	19.39	0	0	
	2505	20800	10	QPSK	1	25	19.28	0	0	
	2505	20800	10	QPSK	1	49	19.33	0	0	
	2505	20800	10	QPSK	25	0	19.31	0	0-1	
	2505	20800	10	QPSK	25	12	19.27	0	0-1	
	2505	20800	10	QPSK	25	25	19.28	0	0-1	
	2505	20800	10	QPSK	50	0	19.25	0	0-1	
	2505	20800	10	16QAM	1	0	19.00	0	0-1	
	2505	20800	10	16QAM	1	25	19.02	0	0-1	
	2505	20800	10	16QAM	1	49	19.03	0	0-1	
	2505	20800	10	16QAM	25	0	19.16	0	0-2	
	2505	20800	10	16QAM	25	12	19.15	0	0-2	
	2505	20800	10	16QAM	25	25	19.17	0	0-2	
	2505	20800	10	16QAM	50	0	19.19	0	0-2	
	Mid	2535.0	21100	10	QPSK	1	0	19.51	0	0
		2535.0	21100	10	QPSK	1	25	19.40	0	0
		2535.0	21100	10	QPSK	1	49	19.33	0	0
		2535.0	21100	10	QPSK	25	0	19.31	0	0-1
2535.0		21100	10	QPSK	25	12	19.28	0	0-1	
2535.0		21100	10	QPSK	25	25	19.33	0	0-1	
2535.0		21100	10	QPSK	50	0	19.32	0	0-1	
2535.0		21100	10	16QAM	1	0	19.57	0	0-1	
2535.0		21100	10	16QAM	1	25	19.49	0	0-1	
2535.0		21100	10	16QAM	1	49	19.51	0	0-1	
2535.0		21100	10	16QAM	25	0	19.30	0	0-2	
2535.0		21100	10	16QAM	25	12	19.34	0	0-2	
2535.0		21100	10	16QAM	25	25	19.38	0	0-2	
2535.0		21100	10	16QAM	50	0	19.21	0	0-2	
High		2565	21400	10	QPSK	1	0	19.68	0	0
		2565	21400	10	QPSK	1	25	19.66	0	0
		2565	21400	10	QPSK	1	49	19.71	0	0
		2565	21400	10	QPSK	25	0	19.53	0	0-1
	2565	21400	10	QPSK	25	12	19.50	0	0-1	
	2565	21400	10	QPSK	25	25	19.54	0	0-1	
	2565	21400	10	QPSK	50	0	19.52	0	0-1	
	2565	21400	10	16QAM	1	0	19.72	0	0-1	
	2565	21400	10	16QAM	1	25	19.67	0	0-1	
	2565	21400	10	16QAM	1	49	19.76	0	0-1	
	2565	21400	10	16QAM	25	0	19.46	0	0-2	
	2565	21400	10	16QAM	25	12	19.40	0	0-2	
	2565	21400	10	16QAM	25	25	19.46	0	0-2	
	2565	21400	10	16QAM	50	0	19.47	0	0-2	

FCC ID: PY7PM-0430		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 47 of 91

Table 9-42
Reduced LTE Band 7 Conducted Powers - 5 MHz Bandwidth
(Representing Hotspot Mode Active)

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Conducted Power [dBm]	Target MPR [dB]	MPR Allowed per 3GPP [dB]
Low	2502.5	20775	5	QPSK	1	0	19.37	0
	2502.5	20775	5	QPSK	1	12	19.26	0
	2502.5	20775	5	QPSK	1	24	19.31	0
	2502.5	20775	5	QPSK	12	0	19.29	0
	2502.5	20775	5	QPSK	12	6	19.25	0
	2502.5	20775	5	QPSK	12	13	19.26	0
	2502.5	20775	5	QPSK	25	0	19.23	0
	2502.5	20775	5	16-QAM	1	0	18.98	0
	2502.5	20775	5	16-QAM	1	12	19.00	0
	2502.5	20775	5	16-QAM	1	24	19.01	0
	2502.5	20775	5	16-QAM	12	0	19.14	0
	2502.5	20775	5	16-QAM	12	6	19.13	0
	2502.5	20775	5	16-QAM	12	13	19.15	0
	2502.5	20775	5	16-QAM	25	0	19.17	0
	2535.0	21100	5	QPSK	1	0	19.49	0
	2535.0	21100	5	QPSK	1	12	19.38	0
	2535.0	21100	5	QPSK	1	24	19.31	0
	2535.0	21100	5	QPSK	12	0	19.29	0
	2535.0	21100	5	QPSK	12	6	19.26	0
	2535.0	21100	5	QPSK	12	13	19.31	0
2535.0	21100	5	QPSK	25	0	19.30	0	
2535.0	21100	5	16-QAM	1	0	19.55	0	
2535.0	21100	5	16-QAM	1	12	19.47	0	
2535.0	21100	5	16-QAM	1	24	19.49	0	
2535.0	21100	5	16-QAM	12	0	19.28	0	
2535.0	21100	5	16-QAM	12	6	19.32	0	
2535.0	21100	5	16-QAM	12	13	19.36	0	
2535.0	21100	5	16-QAM	25	0	19.19	0	
High	2567.5	21425	5	QPSK	1	0	19.66	0
	2567.5	21425	5	QPSK	1	12	19.64	0
	2567.5	21425	5	QPSK	1	24	19.69	0
	2567.5	21425	5	QPSK	12	0	19.51	0
	2567.5	21425	5	QPSK	12	6	19.48	0
	2567.5	21425	5	QPSK	12	13	19.52	0
	2567.5	21425	5	QPSK	25	0	19.50	0
	2567.5	21425	5	16-QAM	1	0	19.70	0
	2567.5	21425	5	16-QAM	1	12	19.65	0
	2567.5	21425	5	16-QAM	1	24	19.74	0
	2567.5	21425	5	16-QAM	12	0	19.44	0
	2567.5	21425	5	16-QAM	12	6	19.38	0
	2567.5	21425	5	16-QAM	12	13	19.44	0
	2567.5	21425	5	16-QAM	25	0	19.45	0

9.4 WLAN Conducted Powers

Table 11-43
IEEE 802.11b Average RF Power

Mode	Freq [MHz]	Channel	802.11b (2.4 GHz) Conducted Power [dBm]			
			Data Rate [Mbps]			
			1	2	5.5	11
802.11b	2412	1*	11.18	11.26	10.84	11.29
802.11b	2417	2*	12.25	12.32	12.31	12.30
802.11b	2437	6*	13.13	13.26	13.07	13.03
802.11b	2457	10*	11.77	11.76	11.75	11.71
802.11b	2462	11*	11.66	11.64	11.21	11.19

Table 11-44
IEEE 802.11g Average RF Power

Mode	Freq [MHz]	Channel	802.11g (2.4 GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			6	9	12	18	24	36	48	54
802.11g	2412	1	11.14	11.13	11.12	11.13	11.09	11.08	10.66	10.66
802.11g	2417	2	12.05	12.06	12.07	12.07	12.01	12.03	11.99	12.00
802.11g	2437	6	13.02	12.98	12.96	12.98	12.96	12.93	12.91	12.89
802.11g	2457	10	11.67	11.65	11.59	11.64	11.62	11.55	11.59	11.62
802.11g	2462	11	10.97	10.96	10.96	10.95	10.94	10.91	10.93	10.94

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 48 of 91

**Table 11-45
IEEE 802.11n Average RF Power**

Mode	Freq	Channel	802.11n (2.4 GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
	[MHz]		6.5	13	20	26	39	52	58	65
802.11n	2412	1	10.71	10.71	10.71	11.15	10.67	10.64	10.66	11.11
802.11n	2417	2	12.16	12.08	12.06	12.03	12.05	12.07	12.06	11.99
802.11n	2437	6	13.01	13.01	13.04	12.98	12.96	12.98	12.96	12.95
802.11n	2457	10	11.64	11.66	11.65	11.59	11.62	11.57	11.64	11.65
802.11n	2462	11	11.08	11.06	11.07	11.01	11.00	10.99	10.97	11.01

**Table 11-46
IEEE 802.11a Average RF Power**

Mode	Freq	Channel	802.11a (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
	[MHz]		6	9	12	18	24	36	48	54
802.11a	5180	36*	12.99	13.45	13.41	13.43	12.48	12.11	11.61	11.59
802.11a	5200	40	13.39	13.41	13.33	13.35	12.41	12.42	11.97	11.95
802.11a	5220	44	13.38	13.41	13.45	13.45	12.50	11.63	11.65	11.64
802.11a	5240	48*	13.39	13.36	13.37	13.40	12.46	12.47	12.02	12.49
802.11a	5260	52*	12.93	12.87	12.90	12.90	11.93	11.97	11.94	11.95
802.11a	5280	56	12.83	12.85	12.89	12.87	11.94	11.98	11.95	11.98
802.11a	5300	60	12.41	12.38	12.32	12.29	11.92	11.46	11.87	11.48
802.11a	5320	64*	12.73	12.76	12.74	12.74	11.85	12.28	12.28	12.33
802.11a	5500	100	11.09	11.10	11.11	11.16	11.05	11.09	11.05	11.06
802.11a	5520	104*	11.23	11.24	11.14	11.18	11.18	11.12	11.11	11.07
802.11a	5540	108	10.71	11.30	11.27	11.25	11.13	10.18	10.16	10.14
802.11a	5560	112	11.31	11.35	11.31	11.34	11.23	10.20	10.74	10.74
802.11a	5580	116*	11.12	11.17	11.12	11.14	11.12	11.10	11.09	11.12
802.11a	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5620	124*	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	5660	132	11.45	11.45	11.47	11.50	11.41	10.90	10.87	10.89
802.11a	5680	136*	10.44	11.02	11.01	11.02	10.47	10.45	10.43	10.41
802.11a	5700	140	10.76	10.72	10.76	10.78	10.77	10.69	10.70	10.72
802.11a	5745	149*	12.87	13.35	12.84	12.85	11.87	11.89	11.86	11.89
802.11a	5765	153	13.48	13.41	13.45	12.95	11.52	11.45	11.46	11.50
802.11a	5785	157*	12.61	13.12	13.09	13.12	11.63	11.63	11.71	11.62
802.11a	5805	161*	12.67	12.69	12.73	12.75	11.27	11.25	11.27	11.32
802.11a	5825	165	13.25	13.25	13.49	12.82	11.81	11.89	11.74	11.82

Per FCC KDB Publication 443999 and RSS-210 A9.2(3), transmission on channels which overlap the 5600-5650 MHz is prohibited as a client. This device does not transmit any beacons or initiate any transmissions in 5.3 and 5.5 GHz Band.

(*) – indicates default channels per KDB Publication 248227 D01v01r02. When the adjacent channels are higher in power than the default channels, these “required channels” are considered for SAR testing instead of the default channels.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 49 of 91

Table 11-47
IEEE 802.11n Average RF Power – 20 MHz Bandwidth

Mode	Freq [MHz]	Channel	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
			6.5	13	20	26	39	52	58	65
802.11n	5180	36	11.31	11.76	11.78	11.77	11.74	11.73	11.71	11.75
802.11n	5200	40	11.69	11.71	11.69	11.64	11.63	11.66	11.65	11.65
802.11n	5220	44	11.58	11.56	11.62	11.63	11.62	11.54	11.59	11.60
802.11n	5240	48	11.57	11.60	11.56	11.51	11.54	11.52	11.52	11.54
802.11n	5260	52	11.91	11.96	11.93	11.89	11.93	11.92	11.87	11.92
802.11n	5280	56	11.86	11.32	11.35	11.94	11.93	11.86	11.85	11.83
802.11n	5300	60	11.44	11.53	11.49	11.43	11.91	11.45	11.89	11.41
802.11n	5320	64	10.93	10.94	10.91	10.91	10.89	11.35	11.37	11.35
802.11n	5500	100	10.03	9.96	9.97	9.95	10.03	9.97	10.01	10.00
802.11n	5520	104	10.05	10.06	10.02	9.96	10.06	10.02	10.07	10.04
802.11n	5540	108	10.17	10.15	10.11	10.08	10.11	10.07	10.14	10.11
802.11n	5560	112	10.18	10.20	10.17	10.18	10.13	10.16	10.17	10.13
802.11n	5580	116	10.08	10.07	10.12	10.10	10.07	10.09	10.08	10.06
802.11n	5600	120	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5620	124	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5640	128	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5660	132	10.32	10.39	10.34	10.34	10.36	10.36	10.28	10.31
802.11n	5680	136	10.31	10.40	10.41	10.42	10.37	10.39	10.34	10.35
802.11n	5700	140	10.31	10.34	10.29	10.24	10.30	10.32	10.29	10.36
802.11n	5745	149	11.90	11.92	11.94	11.89	11.91	11.94	11.91	11.93
802.11n	5765	153	11.57	11.57	11.99	11.96	11.54	11.54	11.52	11.51
802.11n	5785	157	11.61	11.68	11.64	11.67	11.61	11.57	11.66	11.65
802.11n	5805	161	11.78	11.78	11.80	11.78	11.74	11.74	11.71	11.74
802.11n	5825	165	11.39	11.34	11.83	11.78	11.81	11.80	11.34	11.33

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 50 of 91

Table 11-48
IEEE 802.11n Average RF Power – 40 MHz Bandwidth

Mode	Freq	Channel	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
	[MHz]	13.5	27	40.5	54	81	108	121.5	135	
802.11n	5190	38	10.79	10.82	10.86	10.78	10.79	11.69	10.73	10.82
802.11n	5230	46	11.07	11.10	11.12	11.10	11.05	11.03	11.06	11.07
802.11n	5270	54	10.98	11.01	11.07	10.99	10.97	10.97	11.03	10.99
802.11n	5310	62	10.98	10.89	10.89	10.89	10.90	10.89	10.88	10.89
802.11n	5510	102	10.88	10.91	10.90	10.85	10.83	10.88	10.85	10.86
802.11n	5550	110	10.47	10.50	10.56	10.50	10.47	10.46	10.47	10.45
802.11n	5590	118	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5630	126	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11n	5670	134	9.98	10.01	10.04	9.96	9.95	9.99	9.94	9.95
802.11n	5755	151	11.01	11.03	11.02	11.01	11.01	11.02	11.05	11.04
802.11n	5795	159	11.18	11.19	11.17	11.18	11.19	11.15	11.14	11.16


Table 11-49
IEEE 802.11ac Average RF Power – 80 MHz Bandwidth

Mode	Freq	Channel	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]							
			Data Rate [Mbps]							
	[MHz]	29.3	58.5	87.8	117	175.5	234	263.3	292.5	
802.11ac	5210	42	10.62	10.63	10.52	10.59	9.49	9.51	9.50	9.48
802.11ac	5290	58	10.35	10.34	10.36	10.32	9.57	9.60	9.59	9.63
802.11ac	5530	106	10.84	10.95	10.96	10.90	10.49	10.46	10.47	10.48
802.11ac	5775	155	11.04	11.05	11.11	11.13	10.02	10.13	10.12	10.09

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 51 of 91

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012/April 2013 FCC/TCB Meeting Notes:

- For 2.4 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11b were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
- According to KDB 248227 D01 Page 4, "802.11b/g modes are tested on channels 1,6,11; however, if output power reduction is necessary for channels 1 and/or 11 to meet restricted band requirements the highest output channels closest to each of these channels must be tested instead." Therefore, channels 2 and 10 were additionally considered.
- For 5 GHz, highest average RF output power channel for the lowest data rate for IEEE 802.11a were selected for SAR evaluation. Other IEEE 802.11 modes (including 802.11n 20 MHz and 40 MHz) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
- Full SAR tests for all IEEE 802.11ac configurations were not required because the average output power was not more than 0.25 dB higher than IEEE 802.11a mode. IEEE 802.11ac was evaluated for the highest IEEE 802.11a position in each 5 GHz band and exposure condition.
- When the maximum extrapolated peak SAR of the zoom scan for the maximum output channel is <1.6 W/kg and the reported 1g averaged SAR is <0.8 W/kg, SAR testing on other channels is not required. Otherwise, the other default (or corresponding required) test channels were additionally tested using the lowest data rate.
- The bolded data rate and channel above were tested for SAR.
- The average output powers for 802.11ac -20MHz (VHT20) and 802.11ac - 40 MHz (VHT40) modes are equivalent to the 802.11n - 20 MHz (HT20) and 802.11n -40MHz (HT40). Therefore, no additional measurements were required for the lower bandwidths for 802.11ac.
- There is no power reduction for WIFI antenna.

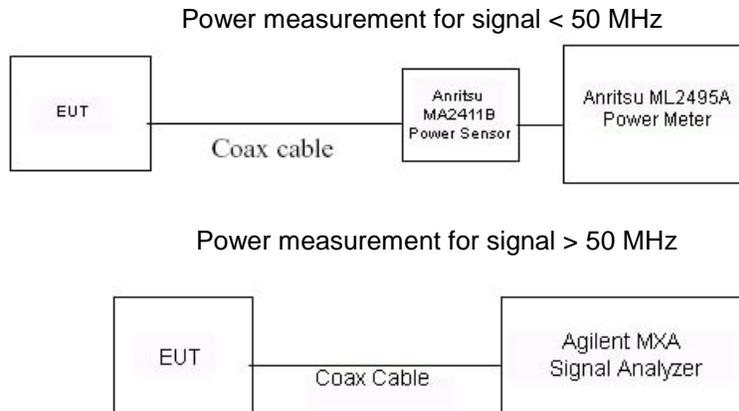

**Figure 9-3
Power Measurement Setup**

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 52 of 91

10 SYSTEM VERIFICATION

10.1 Tissue Verification

The SAR measurement systems have implemented the SAR error compensation algorithms documented in draft standard IEEE P1528-2011 to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters for all frequencies. The test lab has verified that the required SAR error compensation algorithm has been correctly applied to only scale up the measured SAR, and not downward.

**Table 10-1
Measured Tissue Properties - Head**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ			
07/17/2013	740H	21.6	710	0.885	41.298	0.887	42.113	-0.23%	-1.94%			
			725	0.898	41.120	0.888	42.033	1.13%	-2.17%			
			740	0.914	40.909	0.889	41.953	2.81%	-2.49%			
			755	0.927	40.662	0.891	41.876	4.04%	-2.90%			
07/10/2013	835H	22.9	820	0.893	40.803	0.898	41.571	-0.56%	-1.85%			
			835	0.907	40.598	0.900	41.500	0.78%	-2.17%			
			850	0.921	40.405	0.916	41.500	0.55%	-2.64%			
07/23/2013	835H	23.4	820	0.904	40.855	0.898	41.571	0.67%	-1.72%			
			835	0.918	40.674	0.900	41.500	2.00%	-1.99%			
07/25/2013	835H	22.8	850	0.932	40.490	0.916	41.500	1.75%	-2.43%			
			820	0.922	41.430	0.898	41.571	2.67%	-0.34%			
			835	0.936	41.226	0.900	41.500	4.00%	-0.66%			
07/25/2013	1750H	22.4	1710	1.376	39.498	1.348	40.136	2.08%	-1.59%			
			1750	1.408	39.380	1.370	40.100	2.77%	-1.80%			
			1790	1.444	39.119	1.394	40.020	3.59%	-2.25%			
07/15/2013	1900H	23.4	1850	1.332	40.096	1.400	40.000	-4.86%	0.24%			
			1880	1.365	39.987	1.400	40.000	-2.50%	-0.03%			
			1910	1.398	39.883	1.400	40.000	-0.14%	-0.29%			
07/17/2013	1900H	22.0	1850	1.371	40.385	1.400	40.000	-2.07%	0.96%			
			1880	1.399	40.231	1.400	40.000	-0.07%	0.58%			
			1910	1.428	40.100	1.400	40.000	2.00%	0.25%			
06/18/2013	2450H	22.9	2401	1.818	40.156	1.758	39.298	3.41%	2.18%			
			2450	1.878	39.996	1.800	39.200	4.33%	2.03%			
			2499	1.940	39.724	1.852	39.135	4.75%	1.51%			
07/18/2013	2450H - 2600H	24.0	2401	1.790	38.700	1.758	39.298	1.82%	-1.52%			
			2450	1.846	38.495	1.800	39.200	2.56%	-1.80%			
			2499	1.902	38.290	1.852	39.135	2.70%	-2.16%			
			2500	1.903	38.276	1.853	39.133	2.70%	-2.19%			
			2550	1.962	38.070	1.907	39.067	2.88%	-2.55%			
			2600	2.018	37.879	1.960	39.000	2.96%	-2.87%			
05/09/2013	5200H-5800H	23.5	5180	4.456	37.170	4.639	36.020	-3.94%	3.19%			
			5200	4.489	37.242	4.660	36.000	-3.67%	3.45%			
			5220	4.499	37.194	4.680	35.980	-3.87%	3.37%			
			5240	4.516	37.189	4.700	35.960	-3.91%	3.42%			
			5260	4.538	37.198	4.720	35.940	-3.86%	3.50%			
			5280	4.557	37.166	4.740	35.920	-3.86%	3.47%			
			5300	4.565	37.130	4.760	35.900	-4.10%	3.43%			
			5320	4.598	37.104	4.780	35.880	-3.81%	3.41%			
			5500	4.768	36.807	4.965	35.650	-3.97%	3.25%			
			5520	4.811	36.807	4.986	35.620	-3.51%	3.33%			
			5540	4.802	36.796	5.007	35.590	-4.09%	3.39%			
			5560	4.838	36.723	5.028	35.560	-3.78%	3.27%			
			5580	4.842	36.700	5.049	35.530	-4.10%	3.29%			
			5600	4.884	36.704	5.070	35.500	-3.67%	3.39%			
			5620	4.910	36.624	5.090	35.480	-3.54%	3.22%			
			5640	4.925	36.654	5.110	35.460	-3.62%	3.37%			
			5660	4.955	36.672	5.130	35.440	-3.41%	3.48%			
			5680	4.969	36.555	5.150	35.420	-3.51%	3.20%			
			5700	4.992	36.544	5.170	35.400	-3.44%	3.23%			
			5745	5.033	36.440	5.215	35.355	-3.49%	3.07%			
			5765	5.077	36.481	5.235	35.335	-3.02%	3.24%			
			5785	5.081	36.438	5.255	35.315	-3.31%	3.18%			
			5800	5.092	36.381	5.270	35.300	-3.38%	3.06%			
			5805	5.092	36.409	5.275	35.295	-3.47%	3.16%			
			5825	5.117	36.432	5.296	35.275	-3.38%	3.28%			
			05/13/2013	5200H-5800H	21.8	5800	5.034	35.217	5.270	35.300	-4.48%	-0.24%
						5825	5.084	35.262	5.296	35.275	-4.00%	-0.04%

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 53 of 91

**Table 10-2
Measured Tissue Properties - Body**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (C°)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
07/14/2013	740B	22.8	710	0.928	55.352	0.960	55.687	-3.33%	-0.60%
			725	0.942	55.179	0.961	55.629	-1.98%	-0.81%
			740	0.956	55.024	0.963	55.570	-0.73%	-0.98%
			755	0.970	54.886	0.964	55.512	0.62%	-1.13%
07/08/2013	835B	23.5	820	1.000	55.872	0.969	55.258	3.20%	1.11%
			835	1.014	55.695	0.970	55.200	4.54%	0.90%
			850	1.030	55.507	0.988	55.154	4.25%	0.64%
08/08/2013	835B	22.1	820	1.001	54.201	0.969	55.258	3.30%	-1.91%
			835	1.014	54.054	0.970	55.200	4.54%	-2.08%
			850	1.030	53.869	0.988	55.154	4.25%	-2.33%
07/11/2013	1750B	22.8	1710	1.477	52.518	1.460	53.540	1.16%	-1.91%
			1750	1.522	52.353	1.490	53.430	2.15%	-2.02%
			1790	1.570	52.176	1.510	53.330	3.97%	-2.16%
07/15/2013	1750B	22.6	1710	1.402	53.286	1.460	53.540	-3.97%	-0.47%
			1750	1.449	53.197	1.490	53.430	-2.75%	-0.44%
			1790	1.496	53.050	1.510	53.330	-0.93%	-0.53%
07/18/2013	1750B	22.5	1710	1.405	52.676	1.460	53.540	-3.77%	-1.61%
			1750	1.448	52.522	1.490	53.430	-2.82%	-1.70%
			1790	1.495	52.393	1.510	53.330	-0.99%	-1.76%
07/26/2013	1750B	22.8	1710	1.440	51.396	1.460	53.540	-1.37%	-4.00%
			1750	1.478	51.225	1.490	53.430	-0.81%	-4.13%
			1790	1.521	51.136	1.510	53.330	0.73%	-4.11%
08/01/2013	1750B	23.0	1710	1.472	51.192	1.460	53.540	0.82%	-4.39%
			1750	1.513	51.058	1.490	53.430	1.54%	-4.44%
			1790	1.557	50.923	1.510	53.330	3.11%	-4.51%
07/08/2013	1900B	22.6	1850	1.482	54.208	1.520	53.300	-2.50%	1.70%
			1880	1.511	54.125	1.520	53.300	-0.59%	1.55%
			1910	1.553	54.032	1.520	53.300	2.17%	1.37%
07/11/2013	1900B	23.3	1850	1.496	53.312	1.520	53.300	-1.58%	0.02%
			1880	1.517	53.240	1.520	53.300	-0.20%	-0.11%
			1910	1.588	52.947	1.520	53.300	4.47%	-0.66%
07/22/2013	1900B	23.7	1850	1.460	52.146	1.520	53.300	-3.95%	-2.17%
			1880	1.489	52.040	1.520	53.300	-2.04%	-2.36%
			1910	1.519	51.933	1.520	53.300	-0.07%	-2.56%
07/25/2013	1900B	23.7	1850	1.468	53.286	1.520	53.300	-3.42%	-0.03%
			1880	1.498	53.173	1.520	53.300	-1.45%	-0.24%
			1910	1.527	53.079	1.520	53.300	0.46%	-0.41%
08/01/2013	1900B	23.9	1850	1.468	53.386	1.520	53.300	-3.42%	0.16%
			1880	1.502	53.261	1.520	53.300	-1.18%	-0.07%
			1910	1.539	53.147	1.520	53.300	1.25%	-0.29%
08/05/2013	1900B	22.7	1850	1.512	50.914	1.520	53.300	-0.53%	-4.48%
			1880	1.551	50.818	1.520	53.300	2.04%	-4.66%
			1910	1.588	50.715	1.520	53.300	4.47%	-4.85%
06/18/2013	2450B	22.7	2401	1.976	50.372	1.903	52.765	3.84%	-4.54%
			2450	2.045	50.224	1.950	52.700	4.87%	-4.70%
			2499	2.111	50.031	2.019	52.638	4.56%	-4.95%
07/22/2013	2450B - 2600B	22.6	2401	1.966	52.854	1.903	52.765	3.31%	0.17%
			2450	2.031	52.669	1.950	52.700	4.15%	-0.06%
			2499	2.099	52.471	2.019	52.638	3.96%	-0.32%
			2500	2.101	52.454	2.021	52.509	3.96%	-0.10%
08/02/2013	2450B - 2600B	23.3	2550	2.171	52.260	2.092	52.445	3.78%	-0.35%
			2600	2.239	52.077	2.163	52.381	3.51%	-0.58%
			2401	1.927	51.561	1.903	52.765	1.26%	-2.28%
			2450	1.971	51.167	1.950	52.700	1.08%	-2.91%
			2499	2.023	51.097	2.019	52.638	0.20%	-2.93%
			2500	2.021	51.102	2.021	52.636	0.00%	-2.91%
05/06/2013	5200B-5800B	22.4	5200	5.437	47.182	5.299	49.014	2.60%	-3.74%
			5220	5.463	47.153	5.323	48.987	2.63%	-3.74%
			5240	5.465	47.113	5.346	48.933	2.23%	-3.72%
			5260	5.485	47.060	5.369	48.906	2.16%	-3.77%
			5280	5.512	46.987	5.393	48.879	2.21%	-3.87%
			5300	5.546	46.946	5.416	48.851	2.40%	-3.90%
			5320	5.570	46.975	5.439	48.607	2.41%	-3.36%
			5500	5.801	46.707	5.650	48.580	2.67%	-3.86%
			5520	5.815	46.646	5.673	48.553	2.50%	-3.93%
			5540	5.844	46.565	5.696	48.526	2.60%	-4.04%
			5560	5.882	46.564	5.720	48.499	2.83%	-3.99%
			5600	5.946	46.517	5.766	48.444	3.12%	-3.98%
			5660	6.007	46.397	5.837	48.363	2.91%	-4.07%
			5765	6.177	46.255	5.959	48.220	3.66%	-4.08%
			5785	6.183	46.200	5.982	48.242	3.36%	-4.23%
			5800	6.198	46.110	6.000	48.200	3.30%	-4.34%
			5805	6.202	46.123	6.005	48.166	3.28%	-4.24%
			5825	6.240	46.038	6.029	48.132	3.50%	-4.35%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per IEEE 1528 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 54 of 91

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

Table 10-3
System Verification Results - Head

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
C	750	HEAD	07/17/2013	21.0	21.6	0.100	1054	3022	0.807	8.500	8.070	-5.06%
D	835	HEAD	07/10/2013	24.2	22.9	0.100	4d132	3288	0.960	9.660	9.600	-0.62%
D	835	HEAD	07/23/2013	23.5	23.4	0.100	4d026	3288	0.918	9.390	9.180	-2.24%
D	835	HEAD	07/25/2013	23.4	23.4	0.100	4d026	3288	0.996	9.390	9.960	6.07%
B	1750	HEAD	07/25/2013	23.3	22.4	0.100	1008	3287	3.770	36.800	37.700	2.45%
C	1900	HEAD	07/15/2013	22.1	22.5	0.100	5d080	3022	3.970	39.400	39.700	0.76%
G	1900	HEAD	07/17/2013	23.9	22.0	0.100	5d148	3209	3.830	39.700	38.300	-3.53%
B	2450	HEAD	06/18/2013	23.4	22.9	0.100	719	3287	5.340	52.700	53.400	1.33%
C	2450	HEAD	07/18/2013	23.0	23.5	0.100	719	3022	5.620	52.700	56.200	6.64%
C	2600	HEAD	07/18/2013	23.0	23.5	0.100	1004	3022	6.220	58.200	62.200	6.87%
E	5200	HEAD	05/09/2013	24.4	23.3	0.100	1120	3920	6.880	76.000	68.800	-9.47%
E	5300	HEAD	05/09/2013	24.5	23.3	0.100	1120	3920	8.370	78.700	83.700	6.35%
E	5500	HEAD	05/09/2013	24.3	23.2	0.100	1120	3920	8.260	80.100	82.600	3.12%
E	5600	HEAD	05/09/2013	24.3	23.3	0.100	1120	3920	7.500	79.900	75.000	-6.13%
E	5800	HEAD	05/09/2013	24.3	23.3	0.100	1120	3920	7.200	74.900	72.000	-3.87%
E	5800	HEAD	05/13/2013	22.1	21.5	0.100	1120	3920	7.540	74.900	75.400	0.67%

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 55 of 91


**Table 10-4
System Verification Results - Body**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{1g} (W/kg)	1 W Target SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation _{1g} (%)
G	750	BODY	07/14/2013	24.5	22.8	0.100	1003	3209	0.848	8.830	8.480	-3.96%
G	835	BODY	07/08/2013	24.9	23.5	0.100	4d132	3209	0.978	9.360	9.780	4.49%
G	835	BODY	08/08/2013	24.3	22.1	0.100	4d026	3209	1.020	9.580	10.200	6.47%
E	1750	BODY	07/11/2013	23.9	23.1	0.100	1051	3920	3.890	37.800	38.900	2.91%
D	1750	BODY	07/15/2013	21.9	22.6	0.100	1051	3288	3.700	37.800	37.000	-2.12%
B	1750	BODY	07/26/2013	23.7	22.8	0.100	1008	3287	3.960	38.200	39.600	3.66%
B	1900	BODY	07/08/2013	23.2	22.8	0.100	5d080	3287	4.250	40.300	42.500	5.46%
B	1900	BODY	07/11/2013	23.1	22.9	0.100	5d080	3287	4.220	40.300	42.200	4.71%
E	1900	BODY	07/22/2013	22.8	23.4	0.100	5d148	3920	4.220	40.800	42.200	3.43%
E	1900	BODY	07/25/2013	24.2	23.7	0.100	5d148	3920	4.100	40.800	41.000	0.49%
B	1900	BODY	08/05/2013	23.3	23.1	0.100	5d141	3287	4.040	41.500	40.400	-2.65%
C	2450	BODY	06/18/2013	22.9	22.7	0.040	719	3022	2.080	51.600	52.000	0.78%
C	2450	BODY	07/22/2013	23.0	22.6	0.100	719	3022	5.480	51.600	54.800	6.20%
C	2600	BODY	07/22/2013	23.0	22.6	0.100	1004	3022	5.670	57.500	56.700	-1.39%
A	5200	BODY	05/06/2013	23.6	21.8	0.100	1057	3589	7.570	75.500	75.700	0.26%
A	5300	BODY	05/06/2013	23.6	21.8	0.100	1057	3589	8.090	75.300	80.900	7.44%
A	5500	BODY	05/06/2013	23.6	21.8	0.100	1057	3589	8.110	80.800	81.100	0.37%
A	5600	BODY	05/06/2013	23.7	21.9	0.100	1057	3589	8.480	80.300	84.800	5.60%
A	5800	BODY	05/06/2013	23.7	21.8	0.100	1057	3589	7.420	75.100	74.200	-1.20%

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 56 of 91

**Table 10-5
System Verification Results - Extremity SAR**

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Dipole SN	Probe SN	Measured SAR _{10g} (W/kg)	1 W Target SAR _{10g} (W/kg)	1 W Normalized SAR _{10g}	Deviation _{10g} (%)
D	1750	BODY	07/18/2013	24.4	22.5	0.100	1051	3288	2.010	20.400	20.100	-1.47%
B	1750	BODY	08/01/2013	23.2	23.0	0.100	1008	3287	2.080	20.400	20.800	1.96%
E	1900	BODY	08/01/2013	23.6	23.7	0.100	5d148	3920	2.210	20.500	22.100	7.80%
B	1900	BODY	08/05/2013	23.3	23.1	0.100	5d141	3287	2.100	20.500	21.000	2.44%
C	2450	BODY	08/02/2013	23.1	23.2	0.100	719	3022	2.470	24.000	24.700	2.92%
C	2600	BODY	08/02/2013	23.3	23.2	0.100	1004	3022	2.420	24.600	24.200	-1.63%
A	5200	BODY	05/06/2013	23.6	21.8	0.100	1057	3589	2.080	21.100	20.800	-1.42%
A	5300	BODY	05/06/2013	23.6	21.8	0.100	1057	3589	2.230	21.100	22.300	5.69%
A	5500	BODY	05/06/2013	23.6	21.8	0.100	1057	3589	2.220	22.400	22.200	-0.89%
A	5600	BODY	05/06/2013	23.7	21.9	0.100	1057	3589	2.310	22.300	23.100	3.59%
A	5800	BODY	05/06/2013	23.7	21.8	0.100	1057	3589	2.020	20.700	20.200	-2.42%

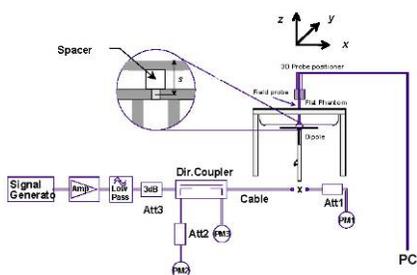

**Figure 10-1
System Verification Setup Diagram**



**Figure 10-2
System Verification Setup Photo**

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 57 of 91

11 SAR DATA SUMMARY

11.1 Standalone Head SAR Data

**Table 11-1
GSM 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
824.20	128	GSM 850	GSM	33.6	32.82	0.18	Right	Cheek	8628	1:8.3	0.213	1.197	0.255	A1
836.60	190	GSM 850	GSM	33.6	33.03	-0.02	Right	Cheek	8628	1:8.3	0.206	1.140	0.235	
848.80	251	GSM 850	GSM	33.6	33.01	-0.07	Right	Cheek	8628	1:8.3	0.202	1.146	0.231	
836.60	190	GSM 850	GSM	33.6	33.03	-0.14	Right	Tilt	8628	1:8.3	0.151	1.140	0.172	
836.60	190	GSM 850	GSM	33.6	33.03	0.19	Left	Cheek	8628	1:8.3	0.186	1.140	0.212	
836.60	190	GSM 850	GSM	33.6	33.03	-0.02	Left	Tilt	8628	1:8.3	0.162	1.140	0.185	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-2
GSM 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	30.6	30.31	0.03	Right	Cheek	8624	1:8.3	0.063	1.069	0.067	
1880.00	661	GSM 1900	GSM	30.6	30.31	0.20	Right	Tilt	8624	1:8.3	0.030	1.069	0.032	
1850.20	512	GSM 1900	GSM	30.6	30.23	-0.02	Left	Cheek	8624	1:8.3	0.089	1.089	0.097	
1880.00	661	GSM 1900	GSM	30.6	30.31	0.02	Left	Cheek	8624	1:8.3	0.104	1.069	0.111	
1909.80	810	GSM 1900	GSM	30.6	30.47	-0.07	Left	Cheek	8624	1:8.3	0.128	1.030	0.132	A2
1880.00	661	GSM 1900	GSM	30.6	30.31	-0.13	Left	Tilt	8624	1:8.3	0.019	1.069	0.020	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-3
UMTS 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
826.40	4132	UMTS 850	RMC	24.5	24.46	-0.04	Right	Cheek	8613	1:1	0.322	1.009	0.325	
836.60	4183	UMTS 850	RMC	24.5	24.47	-0.05	Right	Cheek	8613	1:1	0.337	1.007	0.339	
846.60	4233	UMTS 850	RMC	24.5	24.48	-0.04	Right	Cheek	8613	1:1	0.350	1.005	0.352	A3
836.60	4183	UMTS 850	RMC	24.5	24.47	-0.05	Right	Tilt	8613	1:1	0.211	1.007	0.212	
836.60	4183	UMTS 850	RMC	24.5	24.47	0.12	Left	Cheek	8613	1:1	0.292	1.007	0.294	
836.60	4183	UMTS 850	RMC	24.5	24.47	-0.08	Left	Tilt	8613	1:1	0.221	1.007	0.223	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 58 of 91

**Table 11-4
UMTS 1900 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	24.0	23.62	-0.12	Right	Cheek	8613	1:1	0.100	1.091	0.109	
1880.00	9400	UMTS 1900	RMC	24.0	23.62	-0.12	Right	Tilt	8613	1:1	0.050	1.091	0.055	
1852.40	9262	UMTS 1900	RMC	24.0	23.67	0.06	Left	Cheek	8613	1:1	0.163	1.079	0.176	
1880.00	9400	UMTS 1900	RMC	24.0	23.62	0.00	Left	Cheek	8613	1:1	0.204	1.091	0.223	
1907.60	9538	UMTS 1900	RMC	24.0	23.55	0.05	Left	Cheek	8613	1:1	0.236	1.109	0.262	A4
1880.00	9400	UMTS 1900	RMC	24.0	23.62	0.16	Left	Tilt	8613	1:1	0.032	1.091	0.035	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-5
UMTS IV Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1712.40	1312	UMTS 1750	RMC	24.5	23.96	0.12	Right	Cheek	8613	1:1	0.366	1.132	0.414	A5
1732.40	1412	UMTS 1750	RMC	24.5	24.19	-0.12	Right	Cheek	8613	1:1	0.352	1.074	0.378	
1752.50	1862	UMTS 1750	RMC	24.5	24.27	0.17	Right	Cheek	8613	1:1	0.215	1.054	0.227	
1732.40	1412	UMTS 1750	RMC	24.5	24.19	-0.15	Right	Tilt	8613	1:1	0.092	1.074	0.099	
1732.40	1412	UMTS 1750	RMC	24.5	24.19	-0.19	Left	Cheek	8613	1:1	0.253	1.074	0.272	
1732.40	1412	UMTS 1750	RMC	24.5	24.19	0.03	Left	Tilt	8613	1:1	0.060	1.074	0.064	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-6
LTE Band 2 (PCS) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.8	23.27	0.09	0	Right	Cheek	QPSK	1	99	8620	1:1	0.125	1.130	0.141	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.8	22.13	-0.02	1	Right	Cheek	QPSK	50	25	8620	1:1	0.092	1.167	0.107	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.8	23.27	0.07	0	Right	Tilt	QPSK	1	99	8620	1:1	0.057	1.130	0.064	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.8	22.13	0.05	1	Right	Tilt	QPSK	50	25	8620	1:1	0.042	1.167	0.049	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.8	23.27	0.09	0	Left	Cheek	QPSK	1	99	8620	1:1	0.169	1.130	0.191	A6
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.8	23.25	0.14	0	Left	Cheek	QPSK	1	50	8620	1:1	0.147	1.135	0.167	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.8	23.22	0.05	0	Left	Cheek	QPSK	1	50	8620	1:1	0.126	1.143	0.144	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.8	22.13	0.07	1	Left	Cheek	QPSK	50	25	8620	1:1	0.130	1.167	0.152	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.8	23.27	-0.08	0	Left	Tilt	QPSK	1	99	8620	1:1	0.035	1.130	0.040	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.8	22.13	0.00	1	Left	Tilt	QPSK	50	25	8620	1:1	0.034	1.167	0.040	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram												

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 59 of 91

**Table 11-7
LTE Band 4 (AWS) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.6	23.41	-0.13	0	Right	Cheek	QPSK	1	0	8620	1:1	0.151	1.045	0.158	A7
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.6	22.12	0.11	1	Right	Cheek	QPSK	50	0	8620	1:1	0.102	1.117	0.114	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.6	23.41	-0.08	0	Right	Tilt	QPSK	1	0	8620	1:1	0.065	1.045	0.068	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.6	22.12	-0.08	1	Right	Tilt	QPSK	50	0	8620	1:1	0.047	1.117	0.052	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.6	23.41	0.20	0	Left	Cheek	QPSK	1	0	8620	1:1	0.135	1.045	0.141	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.6	22.12	0.13	1	Left	Cheek	QPSK	50	0	8620	1:1	0.095	1.117	0.106	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.6	23.41	-0.01	0	Left	Tilt	QPSK	1	0	8620	1:1	0.047	1.045	0.049	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.6	22.12	-0.09	1	Left	Tilt	QPSK	50	0	8620	1:1	0.036	1.117	0.040	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-8
LTE Band 5 (Cell) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.1	22.82	-0.05	0	Right	Cheek	QPSK	1	49	8620	1:1	0.217	1.067	0.232	A8
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.1	21.58	0.08	1	Right	Cheek	QPSK	25	0	8620	1:1	0.159	1.127	0.179	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.1	22.82	-0.05	0	Right	Tilt	QPSK	1	49	8620	1:1	0.118	1.067	0.126	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.1	21.58	0.00	1	Right	Tilt	QPSK	25	0	8620	1:1	0.096	1.127	0.108	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.1	22.82	0.03	0	Left	Cheek	QPSK	1	49	8620	1:1	0.172	1.067	0.184	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.1	21.58	0.10	1	Left	Cheek	QPSK	25	0	8620	1:1	0.120	1.127	0.135	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.1	22.82	0.08	0	Left	Tilt	QPSK	1	49	8620	1:1	0.138	1.067	0.147	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.1	21.58	0.02	1	Left	Tilt	QPSK	25	0	8620	1:1	0.093	1.127	0.105	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-9
LTE Band 17 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
710.00	23790	Mid	LTE Band 17	10	23.6	23.13	-0.10	0	Right	Cheek	QPSK	1	0	8620	1:1	0.057	1.114	0.063	
710.00	23790	Mid	LTE Band 17	10	22.6	22.12	0.00	1	Right	Cheek	QPSK	25	25	8620	1:1	0.062	1.117	0.069	
710.00	23790	Mid	LTE Band 17	10	23.6	23.13	0.16	0	Right	Tilt	QPSK	1	0	8620	1:1	0.035	1.114	0.039	
710.00	23790	Mid	LTE Band 17	10	22.6	22.12	0.12	1	Right	Tilt	QPSK	25	25	8620	1:1	0.017	1.117	0.019	
710.00	23790	Mid	LTE Band 17	10	23.6	23.13	0.05	0	Left	Cheek	QPSK	1	0	8620	1:1	0.070	1.114	0.078	A9
710.00	23790	Mid	LTE Band 17	10	22.6	22.12	0.11	1	Left	Cheek	QPSK	25	25	8620	1:1	0.064	1.117	0.071	
710.00	23790	Mid	LTE Band 17	10	23.6	23.13	0.11	0	Left	Tilt	QPSK	1	0	8620	1:1	0.036	1.114	0.040	
710.00	23790	Mid	LTE Band 17	10	22.6	22.12	0.20	1	Left	Tilt	QPSK	25	25	8620	1:1	0.034	1.117	0.038	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 60 of 91

**Table 11-10
LTE Band 7 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
2510.00	20850	Low	LTE Band 7	20	23.8	22.77	0.07	0	Right	Cheek	QPSK	1	50	8620	1:1	0.229	1.268	0.290	
2510.00	20850	Low	LTE Band 7	20	22.8	21.63	0.13	1	Right	Cheek	QPSK	50	0	8620	1:1	0.181	1.309	0.237	
2510.00	20850	Low	LTE Band 7	20	23.8	22.77	0.03	0	Right	Tilt	QPSK	1	50	8620	1:1	0.130	1.268	0.165	
2510.00	20850	Low	LTE Band 7	20	22.8	21.63	-0.08	1	Right	Tilt	QPSK	50	0	8620	1:1	0.122	1.309	0.160	
2510.00	20850	Low	LTE Band 7	20	23.8	22.77	-0.08	0	Left	Cheek	QPSK	1	50	8620	1:1	0.353	1.268	0.448	A10
2535.00	21100	Mid	LTE Band 7	20	23.8	22.60	-0.18	0	Left	Cheek	QPSK	1	99	8620	1:1	0.330	1.318	0.435	
2560.00	21350	High	LTE Band 7	20	23.8	22.75	-0.12	0	Left	Cheek	QPSK	1	99	8620	1:1	0.296	1.274	0.377	
2510.00	20850	Low	LTE Band 7	20	22.8	21.63	0.01	1	Left	Cheek	QPSK	50	0	8620	1:1	0.272	1.309	0.356	
2510.00	20850	Low	LTE Band 7	20	23.8	22.77	0.07	0	Left	Tilt	QPSK	1	50	8620	1:1	0.126	1.268	0.160	
2510.00	20850	Low	LTE Band 7	20	22.8	21.63	-0.03	1	Left	Tilt	QPSK	50	0	8620	1:1	0.111	1.309	0.145	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-11
DTS Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
2437	6	IEEE 802.11b	DSSS	14.0	13.13	0.04	Right	Cheek	6717	1	1:1	0.499	1.222	0.610	
2437	6	IEEE 802.11b	DSSS	14.0	13.13	0.05	Right	Tilt	6717	1	1:1	0.336	1.222	0.411	
2417	2	IEEE 802.11b	DSSS	14.0	12.25	0.13	Left	Cheek	6717	1	1:1	0.633	1.496	0.947	
2437	6	IEEE 802.11b	DSSS	14.0	13.13	-0.10	Left	Cheek	6717	1	1:1	0.902	1.222	1.102	A11
2457	10	IEEE 802.11b	DSSS	14.0	11.77	0.16	Left	Cheek	6717	1	1:1	0.389	1.671	0.650	
2417	2	IEEE 802.11b	DSSS	14.0	12.25	-0.02	Left	Tilt	6717	1	1:1	0.353	1.496	0.528	
2437	6	IEEE 802.11b	DSSS	14.0	13.13	-0.09	Left	Tilt	6717	1	1:1	0.753	1.222	0.920	
2457	10	IEEE 802.11b	DSSS	14.0	11.77	0.04	Left	Tilt	6717	1	1:1	0.223	1.671	0.373	
2437	6	IEEE 802.11b	DSSS	14.0	13.13	-0.06	Left	Cheek	6717	1	1:1	0.879	1.222	1.074	
5765	153	IEEE 802.11a	OFDM	13.5	13.48	0.03	Right	Cheek	3037	6	1:1	0.345	1.005	0.347	
5765	153	IEEE 802.11a	OFDM	13.5	13.48	0.02	Right	Tilt	3037	6	1:1	0.234	1.005	0.235	
5765	153	IEEE 802.11a	OFDM	13.5	13.48	0.14	Left	Cheek	3037	6	1:1	0.751	1.005	0.755	
5805	161	IEEE 802.11a	OFDM	13.5	12.67	0.08	Left	Cheek	3037	6	1:1	0.813	1.211	0.985	
5825	165	IEEE 802.11a	OFDM	13.5	13.25	0.05	Left	Cheek	3037	6	1:1	0.848	1.059	0.898	
5775	155	IEEE 802.11ac	OFDM	11.8	11.04	0.21	Left	Cheek	3037	29.3	1:1	0.375	1.191	0.447	
5765	153	IEEE 802.11a	OFDM	13.5	13.48	0.06	Left	Tilt	3037	6	1:1	0.515	1.005	0.518	
5805	161	IEEE 802.11a	OFDM	13.5	12.67	0.12	Left	Tilt	3037	6	1:1	0.537	1.211	0.650	
5825	165	IEEE 802.11a	OFDM	13.5	13.25	0.13	Left	Tilt	3037	6	1:1	0.484	1.059	0.513	
5825	165	IEEE 802.11a	OFDM	13.5	13.25	-0.09	Left	Cheek	3037	6	1:1	0.958	1.059	1.015	A12
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note: Blue entry represents variability measurement.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 61 of 91

**Table 11-12
NII Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
5240	48	IEEE 802.11a	OFDM	13.5	13.39	0.13	Right	Cheek	3037	6	1:1	0.264	1.026	0.271	
5240	48	IEEE 802.11a	OFDM	13.5	13.39	0.09	Right	Tilt	3037	6	1:1	0.180	1.026	0.185	
5200	40	IEEE 802.11a	OFDM	13.5	13.39	0.05	Left	Cheek	3037	6	1:1	0.698	1.026	0.716	
5240	48	IEEE 802.11a	OFDM	13.5	13.39	0.04	Left	Cheek	3037	6	1:1	0.789	1.026	0.810	A13
5210	42	IEEE 802.11ac	OFDM	11.0	10.62	0.03	Left	Cheek	3037	29.3	1:1	0.419	1.091	0.457	
5200	40	IEEE 802.11a	OFDM	13.5	13.39	0.16	Left	Tilt	3037	6	1:1	0.406	1.026	0.417	
5240	48	IEEE 802.11a	OFDM	13.5	13.39	0.00	Left	Tilt	3037	6	1:1	0.507	1.026	0.520	
5260	52	IEEE 802.11a	OFDM	13.5	12.93	0.18	Right	Cheek	3037	6	1:1	0.237	1.140	0.270	
5260	52	IEEE 802.11a	OFDM	13.5	12.93	0.05	Right	Tilt	3037	6	1:1	0.176	1.140	0.201	
5260	52	IEEE 802.11a	OFDM	13.5	12.93	0.01	Left	Cheek	3037	6	1:1	0.655	1.140	0.747	
5320	64	IEEE 802.11a	OFDM	13.5	12.73	0.08	Left	Cheek	3037	6	1:1	0.566	1.194	0.676	
5290	58	IEEE 802.11ac	OFDM	11.0	10.35	0.09	Left	Cheek	3037	29.3	1:1	0.490	1.161	0.569	
5260	52	IEEE 802.11a	OFDM	13.5	12.93	0.12	Left	Tilt	3037	6	1:1	0.458	1.140	0.522	
5320	64	IEEE 802.11a	OFDM	13.5	12.73	0.09	Left	Tilt	3037	6	1:1	0.444	1.194	0.530	
5660	132	IEEE 802.11a	OFDM	11.5	11.45	0.01	Right	Cheek	3037	6	1:1	0.205	1.012	0.207	
5660	132	IEEE 802.11a	OFDM	11.5	11.45	0.02	Right	Tilt	3037	6	1:1	0.150	1.012	0.152	
5520	104	IEEE 802.11a	OFDM	11.5	11.23	0.10	Left	Cheek	3037	6	1:1	0.425	1.064	0.452	
5560	112	IEEE 802.11a	OFDM	11.5	11.31	0.03	Left	Cheek	3037	6	1:1	0.491	1.045	0.513	
5660	132	IEEE 802.11a	OFDM	11.5	11.45	0.15	Left	Cheek	3037	6	1:1	0.742	1.012	0.751	
5530	106	IEEE 802.11ac	OFDM	11.0	10.84	0.03	Left	Cheek	3037	29.3	1:1	0.420	1.038	0.436	
5520	104	IEEE 802.11a	OFDM	11.5	11.23	0.03	Left	Tilt	3037	6	1:1	0.345	1.064	0.367	
5560	112	IEEE 802.11a	OFDM	11.5	11.31	-0.08	Left	Tilt	3037	6	1:1	0.410	1.045	0.428	
5660	132	IEEE 802.11a	OFDM	11.5	11.45	0.14	Left	Tilt	3037	6	1:1	0.603	1.012	0.610	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 62 of 91

11.2 Standalone Body-Worn SAR Data

Table 11-13
GSM/UMTS Body-Worn SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
824.20	128	GSM 850	GSM	33.6	32.82	0.00	15 mm	8628	1	1:8.3	back	0.314	1.197	0.376	
836.60	190	GSM 850	GSM	33.6	33.03	0.02	15 mm	8628	1	1:8.3	back	0.344	1.140	0.392	
848.80	251	GSM 850	GSM	33.6	33.01	-0.06	15 mm	8628	1	1:8.3	back	0.350	1.146	0.401	A14
836.60	190	GSM 850	GSM	33.6	33.03	-0.01	15 mm	8628	1	1:8.3	front	0.329	1.140	0.375	
1850.20	512	GSM 1900	GSM	30.6	30.23	0.01	15 mm	8628	1	1:8.3	back	0.400	1.089	0.436	
1880.00	661	GSM 1900	GSM	30.6	30.31	0.00	15 mm	8628	1	1:8.3	back	0.444	1.069	0.475	
1909.80	810	GSM 1900	GSM	30.6	30.47	-0.01	15 mm	8628	1	1:8.3	back	0.471	1.030	0.485	A16
1880.00	661	GSM 1900	GSM	30.6	30.31	-0.08	15 mm	8628	1	1:8.3	front	0.386	1.069	0.413	
826.40	4132	UMTS 850	RMC	24.5	24.46	-0.06	15 mm	8617	N/A	1:1	back	0.388	1.009	0.391	
836.60	4183	UMTS 850	RMC	24.5	24.47	-0.04	15 mm	8617	N/A	1:1	back	0.394	1.007	0.397	
846.60	4233	UMTS 850	RMC	24.5	24.48	0.00	15 mm	8617	N/A	1:1	back	0.438	1.005	0.440	A18
836.60	4183	UMTS 850	RMC	24.5	24.47	0.00	15 mm	8617	N/A	1:1	front	0.373	1.007	0.376	
1852.40	9262	UMTS 1900	RMC	24.0	23.67	0.11	15 mm	8617	N/A	1:1	back	0.821	1.079	0.886	
1880.00	9400	UMTS 1900	RMC	24.0	23.62	0.00	15 mm	8617	N/A	1:1	back	0.843	1.091	0.920	
1907.60	9538	UMTS 1900	RMC	24.0	23.55	-0.01	15 mm	8617	N/A	1:1	back	0.861	1.109	0.955	A20
1880.00	9400	UMTS 1900	RMC	24.0	23.62	0.01	15 mm	8617	N/A	1:1	front	0.651	1.091	0.710	
1712.40	1312	UMTS 1750	RMC	24.5	23.96	0.03	15 mm	8617	N/A	1:1	back	0.718	1.132	0.813	
1732.40	1412	UMTS 1750	RMC	24.5	24.19	-0.06	15 mm	8617	N/A	1:1	back	0.741	1.074	0.796	
1752.50	1862	UMTS 1750	RMC	24.5	24.27	-0.02	15 mm	8617	N/A	1:1	back	0.837	1.054	0.882	A22
1732.40	1412	UMTS 1750	RMC	24.5	24.19	0.04	15 mm	8617	N/A	1:1	front	0.710	1.074	0.763	
1752.50	1862	UMTS 1750	RMC	24.5	24.27	0.15	15 mm	8617	N/A	1:1	back	0.816	1.054	0.860	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entry represents variability measurement.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 63 of 91

**Table 11-14
LTE Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.8	23.27	0.00	0	8620	QPSK	1	99	15 mm	back	1:1	0.740	1.130	0.836	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.8	23.25	-0.04	0	8620	QPSK	1	50	15 mm	back	1:1	0.746	1.135	0.847	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.8	23.22	0.01	0	8620	QPSK	1	50	15 mm	back	1:1	0.765	1.143	0.874	A24
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.8	22.13	-0.02	1	8620	QPSK	50	25	15 mm	back	1:1	0.582	1.167	0.679	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.8	22.08	-0.06	1	8620	QPSK	100	0	15 mm	back	1:1	0.585	1.180	0.690	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.8	23.27	-0.01	0	8620	QPSK	1	99	15 mm	front	1:1	0.565	1.130	0.638	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.8	22.13	0.06	1	8620	QPSK	50	25	15 mm	front	1:1	0.445	1.167	0.519	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.6	23.41	-0.01	0	8620	QPSK	1	0	15 mm	back	1:1	0.590	1.045	0.617	A25
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.6	22.12	-0.04	1	8620	QPSK	50	0	15 mm	back	1:1	0.429	1.117	0.479	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.6	23.41	0.07	0	8620	QPSK	1	0	15 mm	front	1:1	0.563	1.045	0.588	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.6	22.12	0.00	1	8620	QPSK	50	0	15 mm	front	1:1	0.411	1.117	0.459	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.1	22.82	-0.01	0	8620	QPSK	1	49	15 mm	back	1:1	0.265	1.067	0.283	A26
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.1	21.58	0.05	1	8620	QPSK	25	0	15 mm	back	1:1	0.196	1.127	0.221	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.1	22.82	0.01	0	8620	QPSK	1	49	15 mm	front	1:1	0.237	1.067	0.253	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.1	21.58	-0.02	1	8620	QPSK	25	0	15 mm	front	1:1	0.175	1.127	0.197	
710.00	23790	Mid	LTE Band 17	10	23.6	23.13	-0.04	0	8620	QPSK	1	0	15 mm	back	1:1	0.100	1.114	0.111	A27
710.00	23790	Mid	LTE Band 17	10	22.6	22.12	0.02	1	8620	QPSK	25	25	15 mm	back	1:1	0.079	1.117	0.088	
710.00	23790	Mid	LTE Band 17	10	23.6	23.13	0.02	0	8620	QPSK	1	0	15 mm	front	1:1	0.086	1.114	0.096	
710.00	23790	Mid	LTE Band 17	10	22.6	22.12	-0.08	1	8620	QPSK	25	25	15 mm	front	1:1	0.069	1.117	0.077	
2510.00	20850	Low	LTE Band 7	20	23.8	22.77	0.07	0	8620	QPSK	1	50	15 mm	back	1:1	0.576	1.268	0.730	
2535.00	21100	Mid	LTE Band 7	20	23.8	22.60	0.00	0	8620	QPSK	1	99	15 mm	back	1:1	0.684	1.318	0.902	A28
2560.00	21350	High	LTE Band 7	20	23.8	22.75	-0.03	0	8620	QPSK	1	99	15 mm	back	1:1	0.610	1.274	0.777	
2510.00	20850	Low	LTE Band 7	20	22.8	21.63	0.03	1	8620	QPSK	50	0	15 mm	back	1:1	0.498	1.309	0.652	
2535.00	21100	Mid	LTE Band 7	20	22.8	21.55	-0.04	1	8620	QPSK	100	0	15 mm	back	1:1	0.423	1.334	0.564	
2510.00	20850	Low	LTE Band 7	20	23.8	22.77	-0.05	0	8620	QPSK	1	50	15 mm	front	1:1	0.341	1.268	0.432	
2510.00	20850	Low	LTE Band 7	20	22.8	21.63	-0.08	1	8620	QPSK	50	0	15 mm	front	1:1	0.276	1.309	0.361	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-15
DTS Body-Worn SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.															
2437	6	IEEE 802.11b	DSSS	14.0	13.13	-0.01	15 mm	6717	1	back	1:1	0.104	1.222	0.127		
2417	2	IEEE 802.11b	DSSS	14.0	12.25	0.02	15 mm	6717	1	front	1:1	0.117	1.496	0.175		
2437	6	IEEE 802.11b	DSSS	14.0	13.13	0.03	15 mm	6717	1	front	1:1	0.125	1.222	0.153	A29	
2457	10	IEEE 802.11b	DSSS	14.0	11.77	-0.04	15 mm	6717	1	front	1:1	0.059	1.671	0.099		
5765	153	IEEE 802.11a	OFDM	13.5	13.48	0.06	15 mm	3039	6	back	1:1	0.125	1.005	0.126	A30	
5805	161	IEEE 802.11a	OFDM	13.5	12.67	-0.12	15 mm	3039	6	back	1:1	0.080	1.211	0.097		
5825	165	IEEE 802.11a	OFDM	13.5	13.25	-0.20	15 mm	3039	6	back	1:1	0.109	1.059	0.115		
5775	155	IEEE 802.11ac	OFDM	11.8	11.04	-0.18	15 mm	3039	29.3	back	1:1	0.083	1.191	0.099		
5765	153	IEEE 802.11a	OFDM	13.5	13.48	-0.02	15 mm	3039	6	front	1:1	0.023	1.005	0.023		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram						

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 64 of 91

**Table 11-16
NII Body-Worn SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
5200	40	IEEE 802.11a	OFDM	13.5	13.39	-0.17	15 mm	3039	6	back	1:1	0.067	1.026	0.069	
5240	48	IEEE 802.11a	OFDM	13.5	13.39	-0.03	15 mm	3039	6	back	1:1	0.088	1.026	0.090	
5210	42	IEEE 802.11ac	OFDM	11.0	10.62	-0.10	15 mm	3039	29.3	back	1:1	0.046	1.091	0.050	
5240	48	IEEE 802.11a	OFDM	13.5	13.39	-0.06	15 mm	3039	6	front	1:1	0.038	1.026	0.039	
5260	52	IEEE 802.11a	OFDM	13.5	12.93	-0.11	15 mm	3039	6	back	1:1	0.073	1.140	0.083	
5320	64	IEEE 802.11a	OFDM	13.5	12.73	-0.02	15 mm	3039	6	back	1:1	0.082	1.194	0.098	
5290	58	IEEE 802.11ac	OFDM	11.0	10.35	-0.10	15 mm	3039	29.3	back	1:1	0.061	1.161	0.071	
5260	52	IEEE 802.11a	OFDM	13.5	12.93	-0.04	15 mm	3039	6	front	1:1	0.045	1.140	0.051	
5520	104	IEEE 802.11a	OFDM	11.5	11.23	-0.16	15 mm	3039	6	back	1:1	0.060	1.064	0.064	
5560	112	IEEE 802.11a	OFDM	11.5	11.31	-0.15	15 mm	3039	6	back	1:1	0.052	1.045	0.054	
5660	132	IEEE 802.11a	OFDM	11.5	11.45	-0.14	15 mm	3039	6	back	1:1	0.094	1.012	0.095	A31
5530	106	IEEE 802.11ac	OFDM	11.0	10.84	-0.17	15 mm	3039	29.3	back	1:1	0.066	1.038	0.069	
5660	132	IEEE 802.11a	OFDM	11.5	11.45	0.12	15 mm	3039	6	front	1:1	0.021	1.012	0.021	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 65 of 91

11.3 Standalone Wireless Router SAR Data

Table 11-17
GPRS/UMTS Hotspot SAR Data

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
824.20	128	GSM 850	GPRS	29.6	29.21	0.07	10 mm	8628	4	1:2.076	back	0.988	1.094	1.081	A15
836.60	190	GSM 850	GPRS	29.6	29.32	0.02	10 mm	8628	4	1:2.076	back	0.903	1.067	0.964	
848.80	251	GSM 850	GPRS	29.6	29.23	-0.05	10 mm	8628	4	1:2.076	back	0.860	1.089	0.937	
824.20	128	GSM 850	GPRS	29.6	29.21	0.00	10 mm	8628	4	1:2.076	front	0.845	1.094	0.924	
836.60	190	GSM 850	GPRS	29.6	29.32	0.03	10 mm	8628	4	1:2.076	front	0.845	1.067	0.902	
848.80	251	GSM 850	GPRS	29.6	29.23	0.00	10 mm	8628	4	1:2.076	front	0.784	1.089	0.854	
836.60	190	GSM 850	GPRS	29.6	29.32	0.06	10 mm	8628	4	1:2.076	bottom	0.467	1.067	0.498	
836.60	190	GSM 850	GPRS	29.6	29.32	0.03	10 mm	8628	4	1:2.076	left	0.205	1.067	0.219	
824.20	128	GSM 850	GPRS	29.6	29.21	0.12	10 mm	8628	4	1:2.076	back	0.975	1.094	1.067	
1850.20	512	GSM 1900	GPRS	24.5	23.12	-0.04	10 mm	8624	4	1:2.076	back	0.642	1.374	0.882	
1880.00	661	GSM 1900	GPRS	24.5	23.16	-0.16	10 mm	8624	4	1:2.076	back	0.630	1.361	0.857	
1909.80	810	GSM 1900	GPRS	24.5	23.35	-0.04	10 mm	8624	4	1:2.076	back	0.784	1.303	1.022	A17
1880.00	661	GSM 1900	GPRS	24.5	23.16	0.04	10 mm	8624	4	1:2.076	front	0.583	1.361	0.793	
1880.00	661	GSM 1900	GPRS	24.5	23.16	0.14	10 mm	8624	4	1:2.076	bottom	0.561	1.361	0.764	
1880.00	661	GSM 1900	GPRS	24.5	23.16	0.00	10 mm	8624	4	1:2.076	left	0.129	1.361	0.176	
826.40	4132	UMTS 850	RMC	24.5	24.46	-0.13	10 mm	8617	N/A	1:1	back	0.840	1.009	0.848	
836.60	4183	UMTS 850	RMC	24.5	24.47	-0.01	10 mm	8617	N/A	1:1	back	0.856	1.007	0.862	
846.60	4233	UMTS 850	RMC	24.5	24.48	0.00	10 mm	8617	N/A	1:1	back	0.873	1.005	0.877	A19
836.60	4183	UMTS 850	RMC	24.5	24.47	0.04	10 mm	8617	N/A	1:1	front	0.684	1.007	0.689	
836.60	4183	UMTS 850	RMC	24.5	24.47	-0.02	10 mm	8617	N/A	1:1	bottom	0.397	1.007	0.400	
836.60	4183	UMTS 850	RMC	24.5	24.47	0.02	10 mm	8617	N/A	1:1	left	0.153	1.007	0.154	
1852.40	9262	UMTS 1900	RMC	21.0	20.94	-0.17	10 mm	8617	N/A	1:1	back	1.030	1.014	1.044	
1880.00	9400	UMTS 1900	RMC	21.0	20.96	-0.12	10 mm	8617	N/A	1:1	back	1.040	1.009	1.049	
1907.60	9538	UMTS 1900	RMC	21.0	20.85	-0.12	10 mm	8617	N/A	1:1	back	1.060	1.035	1.097	A21
1852.40	9262	UMTS 1900	RMC	21.0	20.94	0.04	10 mm	8617	N/A	1:1	front	0.829	1.014	0.841	
1880.00	9400	UMTS 1900	RMC	21.0	20.96	0.02	10 mm	8617	N/A	1:1	front	0.836	1.009	0.844	
1907.60	9538	UMTS 1900	RMC	21.0	20.85	-0.05	10 mm	8617	N/A	1:1	front	0.843	1.035	0.873	
1852.40	9262	UMTS 1900	RMC	21.0	20.94	0.03	10 mm	8617	N/A	1:1	bottom	0.796	1.014	0.807	
1880.00	9400	UMTS 1900	RMC	21.0	20.96	-0.02	10 mm	8617	N/A	1:1	bottom	0.800	1.009	0.807	
1907.60	9538	UMTS 1900	RMC	21.0	20.85	0.04	10 mm	8617	N/A	1:1	bottom	0.860	1.035	0.890	
1880.00	9400	UMTS 1900	RMC	21.0	20.96	0.10	10 mm	8617	N/A	1:1	left	0.315	1.009	0.318	
1907.60	9538	UMTS 1900	RMC	21.0	20.85	0.08	10 mm	8617	N/A	1:1	back	1.040	1.035	1.076	
1712.40	1312	UMTS 1750	RMC	21.5	21.27	0.03	10 mm	8613	N/A	1:1	back	0.663	1.054	0.699	
1732.40	1412	UMTS 1750	RMC	21.5	21.28	-0.06	10 mm	8613	N/A	1:1	back	0.689	1.052	0.725	
1752.50	1862	UMTS 1750	RMC	21.5	21.46	-0.02	10 mm	8613	N/A	1:1	back	0.757	1.009	0.764	A23
1732.40	1412	UMTS 1750	RMC	21.5	21.28	-0.02	10 mm	8613	N/A	1:1	front	0.639	1.052	0.672	
1732.40	1412	UMTS 1750	RMC	21.5	21.28	-0.04	10 mm	8613	N/A	1:1	bottom	0.562	1.052	0.591	
1732.40	1412	UMTS 1750	RMC	21.5	21.28	0.04	10 mm	8613	N/A	1:1	left	0.261	1.052	0.275	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entry represents variability measurement.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 66 of 91

**Table 11-18
LTE Band 2 (PCS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1860.00	18700	Low	LTE Band 2 (PCS)	20	21.0	20.82	-0.12	0	8620	QPSK	1	50	10 mm	back	1:1	0.873	1.042	0.910	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	21.0	20.75	-0.14	0	8620	QPSK	1	99	10 mm	back	1:1	0.932	1.059	0.987	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.0	20.73	-0.16	0	8620	QPSK	1	50	10 mm	back	1:1	0.956	1.064	1.017	A32
1860.00	18700	Low	LTE Band 2 (PCS)	20	21.0	20.75	-0.18	0	8620	QPSK	50	0	10 mm	back	1:1	0.822	1.059	0.870	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	21.0	20.62	-0.02	0	8620	QPSK	50	0	10 mm	back	1:1	0.847	1.091	0.924	
1900.00	19100	High	LTE Band 2 (PCS)	20	21.0	20.66	0.00	0	8620	QPSK	50	25	10 mm	back	1:1	0.942	1.081	1.018	
1860.00	18700	Low	LTE Band 2 (PCS)	20	21.0	20.64	0.01	0	8620	QPSK	100	0	10 mm	back	1:1	0.760	1.086	0.825	
1860.00	18700	Low	LTE Band 2 (PCS)	20	21.0	20.82	0.02	0	8620	QPSK	1	50	10 mm	front	1:1	0.679	1.042	0.708	
1860.00	18700	Low	LTE Band 2 (PCS)	20	21.0	20.75	-0.01	0	8620	QPSK	50	0	10 mm	front	1:1	0.558	1.059	0.591	
1860.00	18700	Low	LTE Band 2 (PCS)	20	21.0	20.82	-0.03	0	8620	QPSK	1	50	10 mm	bottom	1:1	0.678	1.042	0.706	
1860.00	18700	Low	LTE Band 2 (PCS)	20	21.0	20.75	-0.08	0	8620	QPSK	50	0	10 mm	bottom	1:1	0.653	1.059	0.692	
1860.00	18700	Low	LTE Band 2 (PCS)	20	21.0	20.82	0.08	0	8620	QPSK	1	50	10 mm	left	1:1	0.138	1.042	0.144	
1860.00	18700	Low	LTE Band 2 (PCS)	20	21.0	20.75	0.00	0	8620	QPSK	50	0	10 mm	left	1:1	0.128	1.059	0.136	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-19
LTE Band 4 (AWS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	21.44	0.05	0	8620	QPSK	1	0	10 mm	back	1:1	0.814	1.014	0.825	A33
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	21.14	0.00	0	8620	QPSK	50	0	10 mm	back	1:1	0.761	1.086	0.826	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	21.12	-0.04	0	8620	QPSK	100	0	10 mm	back	1:1	0.778	1.091	0.849	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	21.44	-0.01	0	8620	QPSK	1	0	10 mm	front	1:1	0.670	1.014	0.679	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	21.14	-0.01	0	8620	QPSK	50	0	10 mm	front	1:1	0.622	1.086	0.675	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	21.44	0.01	0	8620	QPSK	1	0	10 mm	bottom	1:1	0.623	1.014	0.632	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	21.14	-0.04	0	8620	QPSK	50	0	10 mm	bottom	1:1	0.587	1.086	0.637	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	21.44	0.06	0	8620	QPSK	1	0	10 mm	left	1:1	0.283	1.014	0.287	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	21.5	21.14	-0.01	0	8620	QPSK	50	0	10 mm	left	1:1	0.272	1.086	0.295	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-20
LTE Band 5 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Scaled SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.1	22.82	0.00	0	8620	QPSK	1	49	10 mm	back	1:1	0.527	1.067	0.562	A34
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.1	21.58	-0.05	1	8620	QPSK	25	0	10 mm	back	1:1	0.394	1.127	0.444	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.1	22.82	-0.03	0	8620	QPSK	1	49	10 mm	front	1:1	0.443	1.067	0.473	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.1	21.58	-0.02	1	8620	QPSK	25	0	10 mm	front	1:1	0.332	1.127	0.374	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.1	22.82	0.01	0	8620	QPSK	1	49	10 mm	bottom	1:1	0.241	1.067	0.257	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.1	21.58	0.09	1	8620	QPSK	25	0	10 mm	bottom	1:1	0.180	1.127	0.203	
836.50	20525	Mid	LTE Band 5 (Cell)	10	23.1	22.82	0.10	0	8620	QPSK	1	49	10 mm	left	1:1	0.088	1.067	0.094	
836.50	20525	Mid	LTE Band 5 (Cell)	10	22.1	21.58	0.11	1	8620	QPSK	25	0	10 mm	left	1:1	0.068	1.127	0.077	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID: PY7PM-0430		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 67 of 91

**Table 11-21
LTE Band 17 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
710.00	23790	Mid	LTE Band 17	10	23.6	23.13	0.07	0	8620	QPSK	1	0	10 mm	back	1:1	0.148	1.114	0.165	A35
710.00	23790	Mid	LTE Band 17	10	22.6	22.12	-0.03	1	8620	QPSK	25	25	10 mm	back	1:1	0.132	1.117	0.147	
710.00	23790	Mid	LTE Band 17	10	23.6	23.13	-0.02	0	8620	QPSK	1	0	10 mm	front	1:1	0.114	1.114	0.127	
710.00	23790	Mid	LTE Band 17	10	22.6	22.12	0.01	1	8620	QPSK	25	25	10 mm	front	1:1	0.101	1.117	0.113	
710.00	23790	Mid	LTE Band 17	10	23.6	23.13	-0.05	0	8620	QPSK	1	0	10 mm	bottom	1:1	0.054	1.114	0.060	
710.00	23790	Mid	LTE Band 17	10	22.6	22.12	0.05	1	8620	QPSK	25	25	10 mm	bottom	1:1	0.049	1.117	0.055	
710.00	23790	Mid	LTE Band 17	10	23.6	23.13	0.06	0	8620	QPSK	1	0	10 mm	left	1:1	0.057	1.114	0.063	
710.00	23790	Mid	LTE Band 17	10	22.6	22.12	-0.03	1	8620	QPSK	25	25	10 mm	left	1:1	0.049	1.117	0.055	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-22
LTE Band 7 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.																		
2510.00	20850	Low	LTE Band 7	20	20.5	19.70	0.04	0	8620	QPSK	1	0	10 mm	back	1:1	0.635	1.202	0.763	
2535.00	21100	Mid	LTE Band 7	20	20.5	19.71	-0.02	0	8620	QPSK	1	99	10 mm	back	1:1	0.758	1.199	0.909	A36
2560.00	21350	High	LTE Band 7	20	20.5	19.74	0.02	0	8620	QPSK	1	99	10 mm	back	1:1	0.697	1.191	0.830	
2510.00	20850	Low	LTE Band 7	20	20.5	19.55	0.03	0	8620	QPSK	50	50	10 mm	back	1:1	0.554	1.245	0.680	
2535.00	21100	Mid	LTE Band 7	20	20.5	19.50	0.02	0	8620	QPSK	50	50	10 mm	back	1:1	0.735	1.259	0.925	
2560.00	21350	High	LTE Band 7	20	20.5	19.58	-0.04	0	8620	QPSK	50	50	10 mm	back	1:1	0.675	1.236	0.834	
2560.00	21350	High	LTE Band 7	20	20.5	19.56	0.13	0	8620	QPSK	100	0	10 mm	back	1:1	0.620	1.242	0.770	
2560.00	21350	High	LTE Band 7	20	20.5	19.74	0.02	0	8620	QPSK	1	99	10 mm	front	1:1	0.233	1.191	0.278	
2560.00	21350	High	LTE Band 7	20	20.5	19.58	-0.11	0	8620	QPSK	50	50	10 mm	front	1:1	0.237	1.236	0.293	
2560.00	21350	High	LTE Band 7	20	20.5	19.74	-0.16	0	8620	QPSK	1	99	10 mm	bottom	1:1	0.278	1.191	0.331	
2560.00	21350	High	LTE Band 7	20	20.5	19.58	-0.11	0	8620	QPSK	50	50	10 mm	bottom	1:1	0.271	1.236	0.335	
2560.00	21350	High	LTE Band 7	20	20.5	19.74	-0.05	0	8620	QPSK	1	99	10 mm	left	1:1	0.235	1.191	0.280	
2560.00	21350	High	LTE Band 7	20	20.5	19.58	-0.01	0	8620	QPSK	50	50	10 mm	left	1:1	0.231	1.236	0.286	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram										

**Table 11-23
WLAN Hotspot SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Scaled SAR (1g) (W/kg)	Plot #	
MHz	Ch.															
2437	6	IEEE 802.11b	DSSS	14.0	13.13	-0.01	10 mm	6717	1	back	1:1	0.210	1.222	0.257		
2417	2	IEEE 802.11b	DSSS	14.0	12.25	0.03	10 mm	6717	1	front	1:1	0.100	1.496	0.150		
2437	6	IEEE 802.11b	DSSS	14.0	13.13	-0.01	10 mm	6717	1	front	1:1	0.260	1.222	0.318	A37	
2457	10	IEEE 802.11b	DSSS	14.0	11.77	0.15	10 mm	6717	1	front	1:1	0.021	1.671	0.035		
2437	6	IEEE 802.11b	DSSS	14.0	13.13	-0.06	10 mm	6717	1	top	1:1	0.123	1.222	0.150		
2437	6	IEEE 802.11b	DSSS	14.0	13.13	-0.02	10 mm	6717	1	right	1:1	0.038	1.222	0.046		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 68 of 91

11.4 Standalone Hand SAR Data

Please note that the following 3mm 10g SAR data was measured for configurations where 1g hotspot SAR scaled up to the maximum output power tolerances exceeded a 1g SAR level of 1.2 W/kg. The 3mm Phablet SAR test distance is based on a FCC KDB inquiry and is established according to the specific conditions applicable to the device.

**Table 11-24
GPRS/UMTS Hand SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1850.20	512	GSM 1900	GPRS	26.5	26.30	-0.04	3 mm	8624	4	1:2.076	back	1.460	1.047	1.529	
1880.00	661	GSM 1900	GPRS	26.5	26.35	-0.05	3 mm	8624	4	1:2.076	back	1.910	1.035	1.977	
1909.80	810	GSM 1900	GPRS	26.5	26.50	-0.05	3 mm	8624	4	1:2.076	back	2.250	1.000	2.250	A38
1880.00	661	GSM 1900	GPRS	26.5	26.35	0.03	3 mm	8624	4	1:2.076	front	1.560	1.035	1.615	
1880.00	661	GSM 1900	GPRS	26.5	26.35	-0.08	3 mm	8624	4	1:2.076	bottom	1.380	1.035	1.428	
1852.40	9262	UMTS 1900	RMC	24.0	23.67	0.07	3 mm	8624	N/A	1:1	back	2.530	1.079	2.730	
1880.00	9400	UMTS 1900	RMC	24.0	23.62	0.04	3 mm	8624	N/A	1:1	back	2.640	1.091	2.880	
1907.60	9538	UMTS 1900	RMC	24.0	23.55	-0.02	3 mm	8624	N/A	1:1	back	2.880	1.109	3.194	
1852.40	9262	UMTS 1900	RMC	24.0	23.67	-0.04	3 mm	8624	N/A	1:1	front	2.250	1.079	2.428	
1880.00	9400	UMTS 1900	RMC	24.0	23.62	-0.02	3 mm	8624	N/A	1:1	front	2.310	1.091	2.520	
1907.60	9538	UMTS 1900	RMC	24.0	23.55	-0.06	3 mm	8624	N/A	1:1	front	2.430	1.109	2.695	
1852.40	9262	UMTS 1900	RMC	24.0	23.67	0.04	3 mm	8624	N/A	1:1	bottom	2.060	1.079	2.223	
1880.00	9400	UMTS 1900	RMC	24.0	23.62	0.01	3 mm	8624	N/A	1:1	bottom	2.040	1.091	2.226	
1907.60	9538	UMTS 1900	RMC	24.0	23.55	-0.05	3 mm	8624	N/A	1:1	bottom	2.260	1.109	2.506	
1907.60	9538	UMTS 1900	RMC	24.0	23.55	0.13	3 mm	8624	N/A	1:1	back	3.170	1.109	3.516	A39
1712.40	1312	UMTS 1750	RMC	24.5	23.96	-0.09	3 mm	8624	N/A	1:1	back	2.660	1.132	3.011	
1732.40	1412	UMTS 1750	RMC	24.5	24.19	-0.08	3 mm	8624	N/A	1:1	back	2.910	1.074	3.125	
1752.50	1862	UMTS 1750	RMC	24.5	24.27	-0.07	3 mm	8624	N/A	1:1	back	3.280	1.054	3.457	A40
1712.40	1312	UMTS 1750	RMC	24.5	23.96	-0.01	3 mm	8624	N/A	1:1	front	2.440	1.132	2.762	
1732.40	1412	UMTS 1750	RMC	24.5	24.19	-0.13	3 mm	8624	N/A	1:1	front	2.670	1.074	2.868	
1752.50	1862	UMTS 1750	RMC	24.5	24.27	-0.04	3 mm	8624	N/A	1:1	front	2.930	1.054	3.088	
1752.50	1862	UMTS 1750	RMC	24.5	24.27	0.00	3 mm	8624	N/A	1:1	back	3.110	1.054	3.278	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Hand 4.0 W/kg (mW/g) averaged over 10 grams								

Note: Blue entry represents variability measurement.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 69 of 91

**Table 11-25
LTE Hand SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g) (W/kg)	Scaling Factor	Reported SAR (10g) (W/kg)	Plot #	
MHz	Ch.																		
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.8	23.27	-0.01	0	8694	QPSK	1	99	3 mm	back	1:1	2.070	1.130	2.339	
1880.00	18900	Mid	LTE Band 2 (PCS)	20	23.8	23.25	-0.02	0	8694	QPSK	1	50	3 mm	back	1:1	2.110	1.135	2.395	
1900.00	19100	High	LTE Band 2 (PCS)	20	23.8	23.22	-0.02	0	8694	QPSK	1	50	3 mm	back	1:1	2.220	1.143	2.537	A41
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.8	22.13	-0.03	1	8694	QPSK	50	25	3 mm	back	1:1	1.620	1.167	1.891	
1900.00	19100	High	LTE Band 2 (PCS)	20	22.8	22.08	0.01	1	8694	QPSK	100	0	3 mm	back	1:1	1.700	1.180	2.006	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.8	23.27	-0.01	0	8694	QPSK	1	99	3 mm	front	1:1	1.570	1.130	1.774	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.8	22.13	-0.03	1	8694	QPSK	50	25	3 mm	front	1:1	1.420	1.167	1.657	
1860.00	18700	Low	LTE Band 2 (PCS)	20	23.8	23.27	0.01	0	8694	QPSK	1	99	3 mm	bottom	1:1	1.610	1.130	1.819	
1860.00	18700	Low	LTE Band 2 (PCS)	20	22.8	22.13	-0.04	1	8694	QPSK	50	25	3 mm	bottom	1:1	1.270	1.167	1.482	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	23.6	23.41	-0.01	0	8694	QPSK	1	0	3 mm	back	1:1	2.860	1.045	2.989	A42
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.6	22.12	0.04	1	8694	QPSK	50	0	3 mm	back	1:1	2.200	1.117	2.457	
1732.50	20175	Mid	LTE Band 4 (AWS)	20	22.6	22.10	-0.03	1	8694	QPSK	100	0	3 mm	back	1:1	2.420	1.122	2.715	
2510.00	20850	Low	LTE Band 7	20	23.8	22.77	-0.13	0	8925	QPSK	1	50	3 mm	back	1:1	2.720	1.268	3.449	
2535.00	21100	Mid	LTE Band 7	20	23.8	22.60	-0.06	0	8925	QPSK	1	99	3 mm	back	1:1	2.400	1.318	3.163	
2560.00	21350	High	LTE Band 7	20	23.8	22.75	0.02	0	8925	QPSK	1	99	3 mm	back	1:1	2.730	1.274	3.478	
2510.00	20850	Low	LTE Band 7	20	22.8	21.63	0.01	1	8925	QPSK	50	0	3 mm	back	1:1	2.130	1.309	2.788	
2535.00	21100	Mid	LTE Band 7	20	22.8	21.55	-0.03	1	8925	QPSK	50	0	3 mm	back	1:1	2.080	1.334	2.775	
2560.00	21350	High	LTE Band 7	20	22.8	21.52	-0.03	1	8925	QPSK	50	25	3 mm	back	1:1	2.110	1.343	2.834	
2535.00	21100	Mid	LTE Band 7	20	22.8	21.55	0.01	1	8925	QPSK	100	0	3 mm	back	1:1	2.410	1.334	3.215	
2510.00	20850	Low	LTE Band 7	20	23.8	22.77	-0.13	0	8925	QPSK	1	50	3 mm	back	1:1	2.670	1.268	3.386	
2560.00	21350	High	LTE Band 7	20	23.8	22.75	-0.08	0	8925	QPSK	1	99	3 mm	back	1:1	3.020	1.274	3.847	A43
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak								Hand 4.0 W/kg (mW/g) averaged over 10 grams											
Uncontrolled Exposure/General Population																			

Note: Blue entry represents variability measurement.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 70 of 91

**Table 11-26
WLAN Hand SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (10g)	Scaling Factor	Scaled SAR (10g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
5765	153	IEEE 802.11a	OFDM	13.5	13.48	0.00	3 mm	3039	6	back	1:1	0.356	1.005	0.358	
5805	161	IEEE 802.11a	OFDM	13.5	12.67	-0.03	3 mm	3039	6	back	1:1	0.363	1.211	0.440	A44
5825	165	IEEE 802.11a	OFDM	13.5	13.25	-0.15	3 mm	3039	6	back	1:1	0.295	1.059	0.312	
5775	155	IEEE 802.11ac	OFDM	11.8	11.04	-0.03	3 mm	3039	29.3	back	1:1	0.264	1.191	0.314	
5765	153	IEEE 802.11a	OFDM	13.5	13.48	-0.04	3 mm	3039	6	front	1:1	0.353	1.005	0.355	
5765	153	IEEE 802.11a	OFDM	13.5	13.48	-0.15	3 mm	3039	6	top	1:1	0.156	1.005	0.157	
5765	153	IEEE 802.11a	OFDM	13.5	13.48	0.10	3 mm	3039	6	right	1:1	0.032	1.005	0.032	
5200	40	IEEE 802.11a	OFDM	13.5	13.39	-0.05	3 mm	3039	6	back	1:1	0.564	1.026	0.579	
5240	48	IEEE 802.11a	OFDM	13.5	13.39	-0.04	3 mm	3039	6	back	1:1	0.555	1.026	0.569	
5210	42	IEEE 802.11ac	OFDM	11.0	10.62	-0.12	3 mm	3039	29.3	back	1:1	0.417	1.091	0.455	
5240	48	IEEE 802.11a	OFDM	13.5	13.39	0.00	3 mm	3039	6	front	1:1	0.408	1.026	0.419	
5240	48	IEEE 802.11a	OFDM	13.5	13.39	-0.13	3 mm	3039	6	top	1:1	0.112	1.026	0.115	
5240	48	IEEE 802.11a	OFDM	13.5	13.39	0.03	3 mm	3039	6	right	1:1	0.064	1.026	0.065	
5260	52	IEEE 802.11a	OFDM	13.5	12.93	-0.20	3 mm	3039	6	back	1:1	0.504	1.140	0.575	
5320	64	IEEE 802.11a	OFDM	13.5	12.73	-0.10	3 mm	3039	6	back	1:1	0.604	1.194	0.721	A45
5290	58	IEEE 802.11ac	OFDM	11.0	10.35	-0.12	3 mm	3039	29.3	back	1:1	0.471	1.161	0.547	
5260	52	IEEE 802.11a	OFDM	13.5	12.93	0.03	3 mm	3039	6	front	1:1	0.374	1.140	0.426	
5260	52	IEEE 802.11a	OFDM	13.5	12.93	-0.09	3 mm	3039	6	top	1:1	0.115	1.140	0.131	
5260	52	IEEE 802.11a	OFDM	13.5	12.93	-0.12	3 mm	3039	6	right	1:1	0.101	1.140	0.115	
5520	104	IEEE 802.11a	OFDM	11.5	11.23	-0.10	3 mm	3039	6	back	1:1	0.276	1.064	0.294	
5560	112	IEEE 802.11a	OFDM	11.5	11.31	-0.09	3 mm	3039	6	back	1:1	0.345	1.045	0.361	
5660	132	IEEE 802.11a	OFDM	11.5	11.45	-0.10	3 mm	3039	6	back	1:1	0.442	1.012	0.447	
5530	106	IEEE 802.11ac	OFDM	11.0	10.84	-0.07	3 mm	3039	29.3	back	1:1	0.283	1.038	0.294	
5660	132	IEEE 802.11a	OFDM	11.5	11.45	-0.01	3 mm	3039	6	front	1:1	0.314	1.012	0.318	
5660	132	IEEE 802.11a	OFDM	11.5	11.45	-0.14	3 mm	3039	6	top	1:1	0.171	1.012	0.173	
5660	132	IEEE 802.11a	OFDM	11.5	11.45	0.18	3 mm	3039	6	right	1:1	0.064	1.012	0.064	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Hand 4.0 W/kg (mW/g) averaged over 10 grams								

11.5 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2003, FCC/OET Bulletin 65, Supplement C [June 2001] and FCC KDB Publication 447498 D01v05.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v05.

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 71 of 91

6. Device was tested for both back and front sides using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01, SAR was evaluated without a headset connected to the device. Since the standalone reported SAR was ≤ 1.2 W/kg, no additional SAR evaluations using a headset cable were required.
8. Per FCC KDB 865664 D01 v01, variability SAR tests were performed when the measured 1 gram SAR results for a frequency band were greater than 0.8 W/kg or when the measured 10 gram SAR results for a frequency band were greater than 2.0 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
10. This DUT has NFC operations. The NFC antenna is integrated into the device. Therefore, all SAR tests were performed with the NFC antenna already incorporated.
11. This device utilizes power reduction under some portable hotspot conditions (tethering) for SAR compliance. Therefore, hotspot was tested for some bands at reduced output power levels.

GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D03v01: The source-based time-averaged output power was evaluated for all multi-slot operations. The multi-slot configuration with the highest frame averaged output power was evaluated for SAR for hotspot SAR.
3. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g SAR or ≤ 2.0 W/kg for 10g SAR then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

UMTS Notes:

1. UMTS mode in Body SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v02. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg. DC-HSDPA SAR was not required since SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v05, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g SAR or ≤ 2.0 W/kg for 10g SAR then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r01. The general test procedures used for testing can be found in Section 8.4.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 72 of 91

WLAN Notes:

1. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 2.4 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11b. Other IEEE 802.11 modes (including 802.11g/n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11b mode.
2. Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v01r02 and October 2012 FCC/TCB Meeting Notes for 5 GHz WIFI: Highest average RF output power channel for the lowest data rate was selected for SAR evaluation in 802.11a. Other IEEE 802.11 modes (including 802.11n) were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of IEEE 802.11a mode.
3. When Hotspot is enabled, all 5 GHz bands are disabled. Therefore no 5 GHz WIFI Wireless Router SAR Data was required.
4. WIFI transmission was verified using an uncalibrated spectrum analyzer.
5. When maximum extrapolated peak SAR of the zoom scan for the maximum output channel is >1.6 W/kg or the reported 1g averaged SAR is >0.8 W/kg, SAR testing on other default channels is required.
6. There is no power reduction for WIFI antenna.
7. Per April 2013 TCB workshop notes, full SAR testing for 802.11ac was not required since the average output power was not more than 0.25 dB higher than the output power of IEEE 802.11a mode. IEEE 802.11ac was evaluated for the highest IEEE 802.11a position in each 5 GHz band and exposure condition.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 73 of 91

12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v05 are applicable to handsets with built-in unlicensed transmitters such as 802.11a/b/g/n/ac and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v05r01 IV.C.1.iii, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg and when the sum of the 10g SAR for all simultaneous transmitting antennas in a specific physical test configuration is ≤ 4.0 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v05r01 4.3.2 2), the following equations must be used to estimate the standalone 1g and 10g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated 1g SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

$$\text{Estimated 10g SAR} = \frac{\sqrt{f(\text{GHz})}}{18.75} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

**Table 12-1
Estimated SAR**

Mode	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated 1g SAR (Body)
	[MHz]	[dBm]	[mm]	[W/kg]
Bluetooth	2441	9.50	15	0.125

Mode	Frequency	Maximum Allowed Power	Separation Distance (Body)	Estimated 10g SAR (Hand)
	[MHz]	[dBm]	[mm]	[W/kg]
Bluetooth	2441	9.50	5	0.150

Notes:

1. Held-to ear configurations are not applicable to Bluetooth operations and therefore were not considered for simultaneous transmission. Per KDB Publication 447498 D01v05, the maximum power of the channel was rounded to the nearest mW before calculation.
2. Per FCC KDB Publication 447498 D01v05r01, when the test separation distance is < 5 mm (touching), a distance of 5 mm is applied to determine estimated SAR.

FCC ID: PY7PM-0430	PCTEST <small>ENGINEERING LABORATORY, INC.</small>	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 74 of 91

12.3 Head SAR Simultaneous Transmission Analysis

Table 12-2
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)

Simult Tx	Configuration	GSM 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GSM 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.255	0.610	0.865	Head SAR	Right Cheek	0.067	0.610	0.677
	Right Tilt	0.172	0.411	0.583		Right Tilt	0.032	0.411	0.443
	Left Cheek	0.212	1.102	1.314		Left Cheek	0.132	1.102	1.234
	Left Tilt	0.185	0.920	1.105		Left Tilt	0.020	0.920	0.940
Simult Tx	Configuration	UMTS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.352	0.610	0.962	Head SAR	Right Cheek	0.109	0.610	0.719
	Right Tilt	0.212	0.411	0.623		Right Tilt	0.055	0.411	0.466
	Left Cheek	0.294	1.102	1.396		Left Cheek	0.262	1.102	1.364
	Left Tilt	0.223	0.920	1.143		Left Tilt	0.035	0.920	0.955
Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.414	0.610	1.024	Head SAR	Right Cheek	0.141	0.610	0.751
	Right Tilt	0.099	0.411	0.510		Right Tilt	0.064	0.411	0.475
	Left Cheek	0.272	1.102	1.374		Left Cheek	0.191	1.102	1.293
	Left Tilt	0.064	0.920	0.984		Left Tilt	0.040	0.920	0.960
Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.158	0.610	0.768	Head SAR	Right Cheek	0.232	0.610	0.842
	Right Tilt	0.068	0.411	0.479		Right Tilt	0.126	0.411	0.537
	Left Cheek	0.141	1.102	1.243		Left Cheek	0.184	1.102	1.286
	Left Tilt	0.049	0.920	0.969		Left Tilt	0.147	0.920	1.067
Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 7 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.069	0.610	0.679	Head SAR	Right Cheek	0.290	0.610	0.900
	Right Tilt	0.039	0.411	0.450		Right Tilt	0.165	0.411	0.576
	Left Cheek	0.078	1.102	1.180		Left Cheek	0.448	1.102	1.550
	Left Tilt	0.040	0.920	0.960		Left Tilt	0.160	0.920	1.080

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 75 of 91

Table 12-3
Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)

Simult Tx	Configuration	GSM 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GSM 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.255	0.347	0.602	Head SAR	Right Cheek	0.067	0.347	0.414
	Right Tilt	0.172	0.235	0.407		Right Tilt	0.032	0.235	0.267
	Left Cheek	0.212	1.015	1.227		Left Cheek	0.132	1.015	1.147
	Left Tilt	0.185	0.650	0.835		Left Tilt	0.020	0.650	0.670
Simult Tx	Configuration	UMTS 850 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Right Cheek	0.352	0.347	0.699	Head SAR	Right Cheek	0.109	0.347	0.456
	Right Tilt	0.212	0.235	0.447		Right Tilt	0.055	0.235	0.290
	Left Cheek	0.294	1.015	1.309		Left Cheek	0.262	1.015	1.277
	Left Tilt	0.223	0.650	0.873		Left Tilt	0.035	0.650	0.685
Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)					
Head SAR	Right Cheek	0.414	0.347	0.761					
	Right Tilt	0.099	0.235	0.334					
	Left Cheek	0.272	1.015	1.287					
	Left Tilt	0.064	0.650	0.714					

12.4 Body-Worn Simultaneous Transmission Analysis

Table 12-4
Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.5 cm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.401	0.127	0.528	Front Side	GSM 850	0.375	0.175	0.550
Back Side	GSM 1900	0.485	0.127	0.612	Front Side	GSM 1900	0.413	0.175	0.588
Back Side	UMTS 850	0.440	0.127	0.567	Front Side	UMTS 850	0.376	0.175	0.551
Back Side	UMTS 1900	0.955	0.127	1.082	Front Side	UMTS 1900	0.710	0.175	0.885
Back Side	UMTS 1750	0.882	0.127	1.009	Front Side	UMTS 1750	0.763	0.175	0.938
Back Side	LTE Band 2 (PCS)	0.874	0.127	1.001	Front Side	LTE Band 2 (PCS)	0.638	0.175	0.813
Back Side	LTE Band 4 (AWS)	0.617	0.127	0.744	Front Side	LTE Band 4 (AWS)	0.588	0.175	0.763
Back Side	LTE Band 5 (Cell)	0.283	0.127	0.410	Front Side	LTE Band 5 (Cell)	0.253	0.175	0.428
Back Side	LTE Band 17	0.111	0.127	0.238	Front Side	LTE Band 17	0.096	0.175	0.271
Back Side	LTE Band 7	0.902	0.127	1.029	Front Side	LTE Band 7	0.432	0.175	0.607

Table 12-5
Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 15 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Configuration	Mode	2G/3G SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.401	0.126	0.527	Front Side	GSM 850	0.375	0.051	0.426
Back Side	GSM 1900	0.485	0.126	0.611	Front Side	GSM 1900	0.413	0.051	0.464
Back Side	UMTS 850	0.440	0.126	0.566	Front Side	UMTS 850	0.376	0.051	0.427
Back Side	UMTS 1900	0.955	0.126	1.081	Front Side	UMTS 1900	0.710	0.051	0.761
Back Side	UMTS 1750	0.882	0.126	1.008	Front Side	UMTS 1750	0.763	0.051	0.814

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 76 of 91

Table 12-6
Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 15 mm)

Configuration	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Configuration	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Back Side	GSM 850	0.401	0.125	0.526	Front Side	GSM 850	0.375	0.125	0.500
Back Side	GSM 1900	0.485	0.125	0.610	Front Side	GSM 1900	0.413	0.125	0.538
Back Side	UMTS 850	0.440	0.125	0.565	Front Side	UMTS 850	0.376	0.125	0.501
Back Side	UMTS 1900	0.955	0.125	1.080	Front Side	UMTS 1900	0.710	0.125	0.835
Back Side	UMTS 1750	0.882	0.125	1.007	Front Side	UMTS 1750	0.763	0.125	0.888
Back Side	LTE Band 2 (PCS)	0.874	0.125	0.999	Front Side	LTE Band 2 (PCS)	0.638	0.125	0.763
Back Side	LTE Band 4 (AWS)	0.617	0.125	0.742	Front Side	LTE Band 4 (AWS)	0.588	0.125	0.713
Back Side	LTE Band 5 (Cell)	0.283	0.125	0.408	Front Side	LTE Band 5 (Cell)	0.253	0.125	0.378
Back Side	LTE Band 17	0.111	0.125	0.236	Front Side	LTE Band 17	0.096	0.125	0.221
Back Side	LTE Band 7	0.902	0.125	1.027	Front Side	LTE Band 7	0.432	0.125	0.557

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498. Estimated Bluetooth SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

12.5 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR ("-").

Table 12-7
Simultaneous Transmission Scenario (2.4 GHz Hotspot at 1.0 cm)

Simult Tx	Configuration	GPRS 850 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	1.081	0.257	1.338	Body SAR	Back	1.022	0.257	1.279
	Front	0.924	0.318	1.242		Front	0.793	0.318	1.111
	Top	-	0.150	0.150		Top	-	0.150	0.150
	Bottom	0.498	-	0.498		Bottom	0.764	-	0.764
	Right	-	0.046	0.046		Right	-	0.046	0.046
	Left	0.219	-	0.219		Left	0.176	-	0.176
Body SAR	Back	0.877	0.257	1.134	Body SAR	Back	1.097	0.257	1.354
	Front	0.689	0.318	1.007		Front	0.873	0.318	1.191
	Top	-	0.150	0.150		Top	-	0.150	0.150
	Bottom	0.400	-	0.400		Bottom	0.890	-	0.890
	Right	-	0.046	0.046		Right	-	0.046	0.046
	Left	0.154	-	0.154		Left	0.318	-	0.318
Body SAR	Back	0.764	0.257	1.021	Body SAR	Back	1.018	0.257	1.275
	Front	0.672	0.318	0.990		Front	0.708	0.318	1.026
	Top	-	0.150	0.150		Top	-	0.150	0.150
	Bottom	0.591	-	0.591		Bottom	0.706	-	0.706
	Right	-	0.046	0.046		Right	-	0.046	0.046
	Left	0.275	-	0.275		Left	0.144	-	0.144

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 77 of 91

Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 5 (Cell) SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.849	0.257	1.106	Body SAR	Back	0.562	0.257	0.819
	Front	0.679	0.318	0.997		Front	0.473	0.318	0.791
	Top	-	0.150	0.150		Top	-	0.150	0.150
	Bottom	0.637	-	0.637		Bottom	0.257	-	0.257
	Right	-	0.046	0.046		Right	-	0.046	0.046
Left	0.295	-	0.295	Left	0.094	-	0.094		
Simult Tx	Configuration	LTE Band 17 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 7 SAR (W/kg)	2.4 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Body SAR	Back	0.165	0.257	0.422	Body SAR	Back	0.925	0.257	1.182
	Front	0.127	0.318	0.445		Front	0.293	0.318	0.611
	Top	-	0.150	0.150		Top	-	0.150	0.150
	Bottom	0.060	-	0.060		Bottom	0.335	-	0.335
	Right	-	0.046	0.046		Right	-	0.046	0.046
Left	0.063	-	0.063	Left	0.286	-	0.286		

12.6 Hand SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 648474 D04 Handset SAR v01r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-“).

Table 12-8
Simultaneous Transmission Scenario (Bluetooth Hand SAR at 0.3 cm)

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Hand SAR	Back	2.250	0.150	2.400	Hand SAR	Back	3.516	0.150	3.666
	Front	1.615	0.150	1.765		Front	2.695	0.150	2.845
	Top	-	0.150	0.150		Top	-	0.150	0.150
	Bottom	1.428	-	1.428		Bottom	2.506	-	2.506
	Right	-	0.150	0.150		Right	-	0.150	0.150
Left	-	-	0.000	Left	-	-	0.000		
Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Hand SAR	Back	3.457	0.150	3.607	Hand SAR	Back	2.537	0.150	2.687
	Front	3.088	0.150	3.238		Front	1.774	0.150	1.924
	Top	-	0.150	0.150		Top	-	0.150	0.150
	Bottom	-	-	0.000		Bottom	1.819	-	1.819
	Right	-	0.150	0.150		Right	-	0.150	0.150
Left	-	-	0.000	Left	-	-	0.000		
Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 7 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Hand SAR	Back	2.989	0.150	3.139	Hand SAR	Back	3.847	0.150	3.997
	Front	-	0.150	0.150		Front	-	0.150	0.150
	Top	-	0.150	0.150		Top	-	0.150	0.150
	Bottom	-	-	0.000		Bottom	-	-	0.000
	Right	-	0.150	0.150		Right	-	0.150	0.150
Left	-	-	0.000	Left	-	-	0.000		

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498. Estimated Bluetooth SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT		SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset			Page 78 of 91

**Table 12-9
Simultaneous Transmission Scenario (5 GHz Hand SAR at 0.3 cm)**

Simult Tx	Configuration	GPRS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 2 (PCS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 4 (AWS) SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)
Hand SAR	Back	2.250	0.721	2.971	Hand SAR	Back	2.537	0.721	3.258	Hand SAR	Back	2.989	0.721	3.710
	Front	1.615	0.426	2.041		Front	1.774	0.426	2.200		Front	-	0.426	0.426
	Top	-	0.173	0.173		Top	-	0.173	0.173		Top	-	0.173	0.173
	Bottom	1.428	-	1.428		Bottom	1.819	-	1.819		Bottom	-	-	0.000
	Right	-	0.115	0.115		Right	-	0.115	0.115		Right	-	0.115	0.115
	Left	-	-	0.000		Left	-	-	0.000		Left	-	-	0.000

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Hand SAR	Back	3.457	0.721	See Note	0.05	Hand SAR	Back	3.516	0.721	See Note	0.06
	Front	3.088	0.426	3.514	N/A		Front	2.695	0.426	3.121	N/A
	Top	-	0.173	0.173	N/A		Top	-	0.173	0.173	N/A
	Bottom	-	-	0.000	N/A		Bottom	2.506	-	2.506	N/A
	Right	-	0.115	0.115	N/A		Right	-	0.115	0.115	N/A
	Left	-	-	0.000	N/A		Left	-	-	0.000	N/A

Simult Tx	Configuration	LTE Band 7 SAR (W/kg)	5 GHz WLAN SAR (W/kg)	Σ SAR (W/kg)	SPLSR
Hand SAR	Back	3.847	0.721	See Note	0.06
	Front	-	0.426	0.426	N/A
	Top	-	0.173	0.173	N/A
	Bottom	-	-	0.000	N/A
	Right	-	0.115	0.115	N/A
	Left	-	-	0.000	N/A

Note:

1. No evaluation was performed to determine the aggregate 10g SAR for these configurations as the SPLS ratio between the antenna pairs was not higher than 0.1 per FCC KDB 447498 D01v05. See Section 12.7 for detailed SPLS ratio analysis.

12.7 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v05, when the 1g sum of the standalone transmitters is more than 1.6 W/kg or when the 10g sum of the standalone transmitters is more than 4.0 W/kg, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is ≤ 0.04 for 1 g or ≤ 0.1 for 10 g, simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{\text{Tx1} - \text{Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 79 of 91

The sum of the standalone SAR values was above 4.0 W/kg for the Hand SAR Back side configuration at a separation distance of 3 mm with UMTS 1750 antenna operating at maximum power with 5 GHz WIFI antenna.

Table 12-10
Peak SAR Locations for Hand SAR Back Side at 3 mm UMTS 1750 and 5 GHz WLAN

Mode/Band	x (mm)	y (mm)	z (mm)
UMTS 1750	-2.04	-90.00	-205.00
802.11a	-32.00	72.00	-199.00

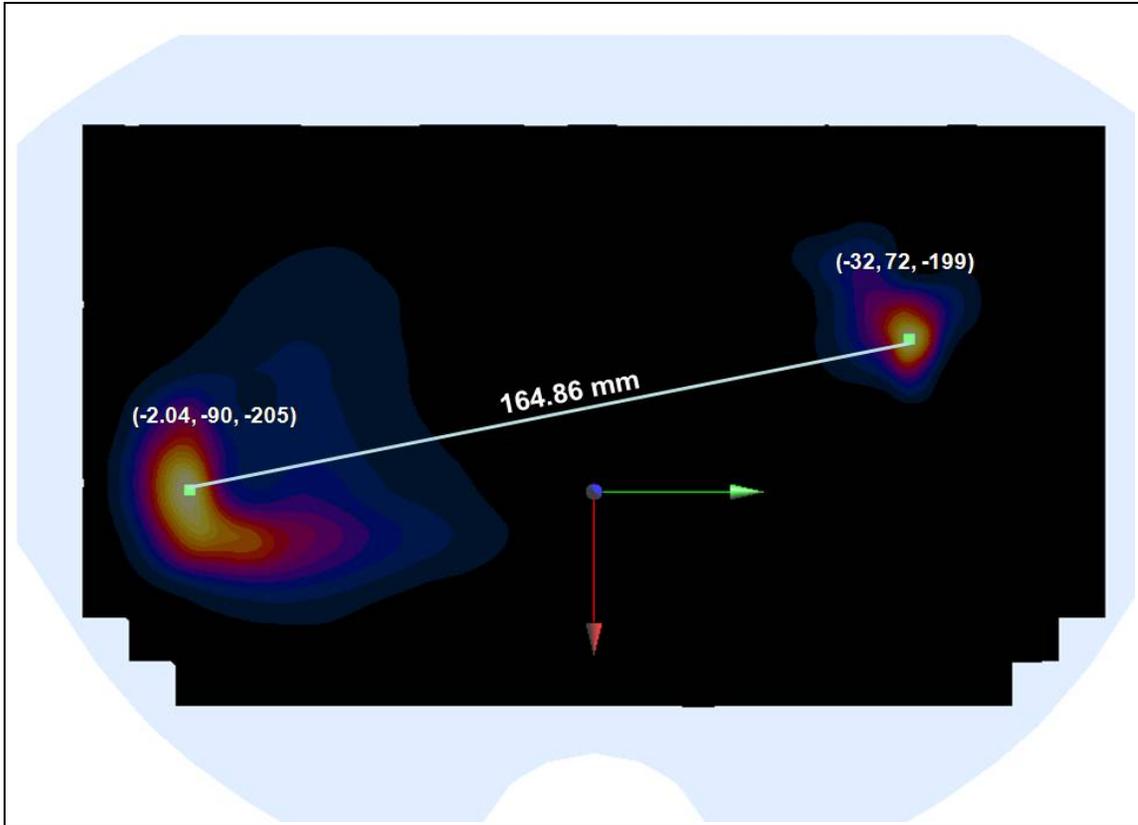


Figure 12-1
Peak SAR Locations of 5 GHz WLAN and UMTS 1750

Table 12-11
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 10g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
UMTS 1750	802.11a	3.457	0.721	4.178	164.86	0.05

FCC ID: PY7PM-0430		SAR EVALUATION REPORT		Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 80 of 91

The sum of the standalone SAR values was above 4.0 W/kg for the Hand SAR Back side configuration at a separation distance of 3 mm with UMTS 1900 antenna operating at maximum power with 5 GHz WIFI antenna.

Table 12-12
Peak SAR Locations for Hand SAR Back Side at 3 mm UMTS 1900 and 5 GHz WLAN

Mode/Band	x (mm)	y (mm)	z (mm)
UMTS 1900	-0.50	-80.50	-204.00
802.11a	-32.00	72.00	-199.00

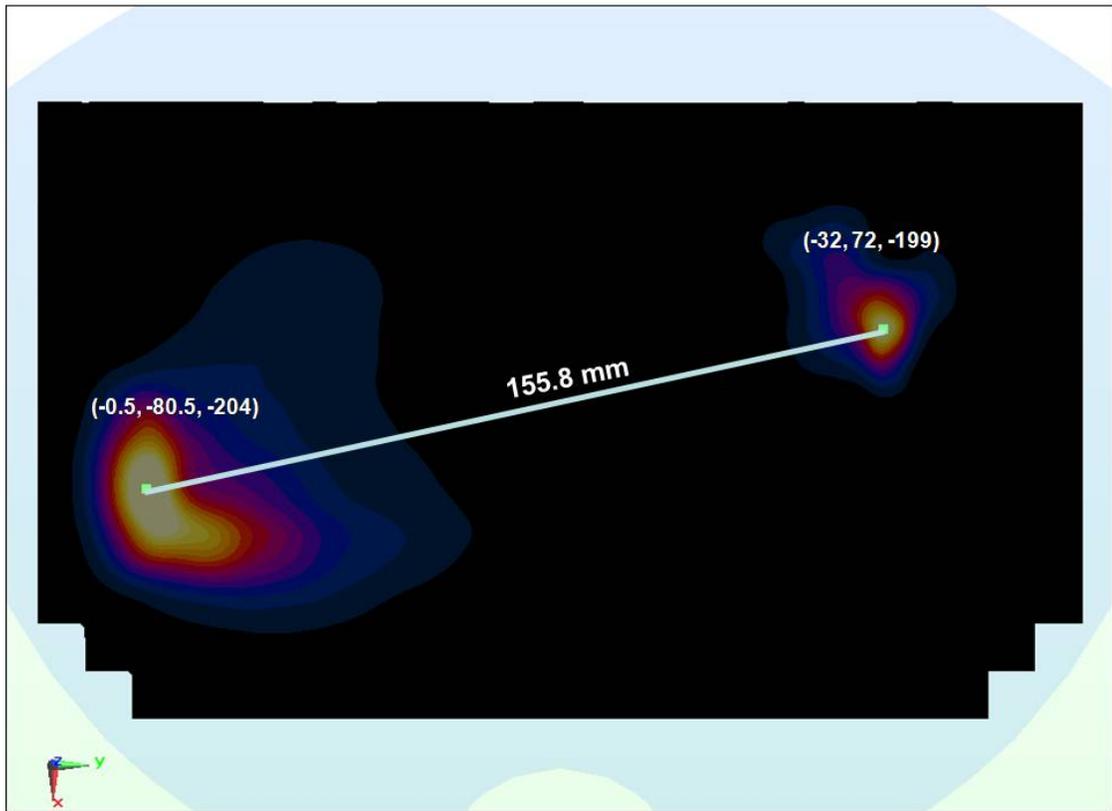


Figure 12-2
Peak SAR Locations of 5 GHz WLAN and UMTS 1900

Table 12-13
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 10g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
UMTS 1900	802.11a	3.516	0.721	4.237	155.8	0.06

FCC ID: PY7PM-0430		SAR EVALUATION REPORT		SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset			Page 81 of 91

The sum of the standalone SAR values was above 4.0 W/kg for the Hand SAR Back side configuration at a separation distance of 3 mm with LTE Band 7 antenna operating at maximum power with 5 GHz WIFI antenna.

Table 12-14
Peak SAR Locations for Hand SAR Back Side at 3 mm LTE Band 7 and 5 GHz WLAN

Mode/Band	x (mm)	y (mm)	z (mm)
LTE Band 7	6.99	-86.00	-205.00
802.11a	-32.00	72.00	-199.00

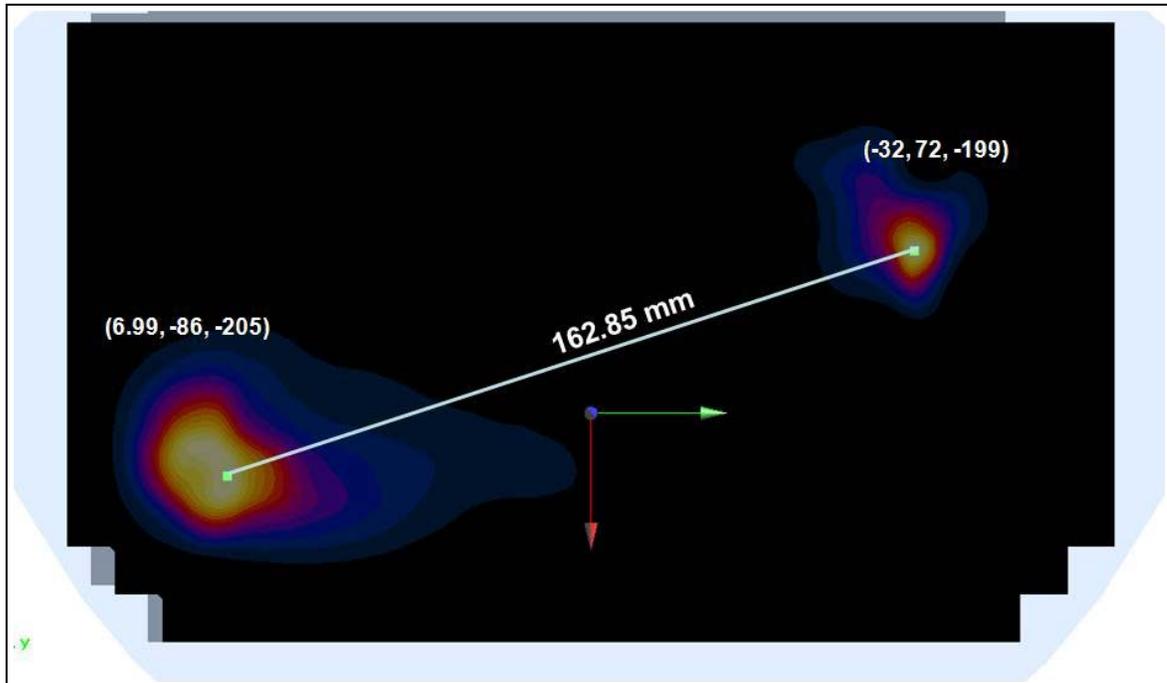


Figure 12-3
Peak SAR Locations of 5 GHz WLAN and LTE Band 7

Table 12-15
SAR Sum to Peak Location Separation Ratio Calculation

Antenna Pair		Standalone 10g SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio
Ant "a"	Ant "b"	a	b	a+b	D_{a-b}	$(a+b)^{1.5}/D_{a-b}$
LTE Band 7	802.11a	3.847	0.721	4.568	162.85	0.06

12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v05.

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 82 of 91

13 SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
- 5) 10g Hand SAR measurement variability analysis applies a factor of 2.5 to the procedures outlines above.

**Table 13-1
Head SAR Measurement Variability Results**

HEAD VARIABILITY RESULTS														
Band	FREQUENCY		Mode/Band	Service	Side	Test Position	Data Rate (Mbps)	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
2450	2437.00	6	IEEE 802.11b	DSSS	Left	Cheek	1	0.902	0.879	1.03	N/A	N/A	N/A	N/A
5800	5825.00	165	IEEE 802.11a	OFDM	Left	Cheek	6	0.848	0.958	1.13	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Head 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 13-2
Body SAR Measurement Variability Results**

BODY VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	# of Time Slots	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
835	824.20	128	GSM 850	GPRS	4	back	10 mm	0.988	0.975	1.01	N/A	N/A	N/A	N/A
1750	1752.50	1862	UMTS 1750	RMC	N/A	back	15 mm	0.837	0.816	1.03	N/A	N/A	N/A	N/A
1900	1907.60	9538	UMTS 1900	RMC	N/A	back	10 mm	1.060	1.040	1.02	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 83 of 91

**Table 13-3
Hand SAR Measurement Variability Results**

BODY VARIABILITY RESULTS													
Band	FREQUENCY		Mode	Service	Side	Spacing	Measured SAR (10g)	1st Repeated SAR (10g)	Ratio	2nd Repeated SAR (10g)	Ratio	3rd Repeated SAR (10g)	Ratio
	MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1900	1907.60	9538	UMTS 1900	RMC	back	3 mm	2.880	3.170	1.10	N/A	N/A	N/A	N/A
1750	1752.50	1862	UMTS 1750	RMC	back	3 mm	3.280	3.110	1.05	N/A	N/A	N/A	N/A
2450	2510.00	20850	LTE Band 7	QPSK, 1 RB, 50 RB Offset	back	3 mm	2.720	2.670	1.02	N/A	N/A	N/A	N/A
2600	2560.00	21350	LTE Band 7	QPSK, 1 RB, 99 RB Offset	back	3 mm	2.730	3.020	1.11	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Hand 4.0 W/kg (mW/g) averaged over 10 grams						

13.2 Measurement Uncertainty

The measured SAR was <1.5 W/kg for all frequency bands. Therefore, per KDB Publication 865664 D01v01, the standard measurement uncertainty analysis per IEEE 1528-2003 was not required.

FCC ID: PY7PM-0430	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 84 of 91

14 EQUIPMENT LIST

Equipment used between 05-06-2013 and 05-13-2013:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
SPEAG	D5GHzV2	5 GHz SAR Dipole	1/11/2013	Annual	1/11/2014	1057
SPEAG	D5GHzV2	5 GHz SAR Dipole	2/14/2013	Annual	2/14/2014	1120
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/6/2013	Annual	2/6/2014	649
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/17/2013	Annual	1/17/2014	1272
SPEAG	EX3DV4	SAR Probe	2/27/2013	Annual	2/27/2014	3920
SPEAG	EX3DV4	SAR Probe	1/17/2013	Annual	1/17/2014	3589

Equipment used between 06-18-2013 and 08-08-2013:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
SPEAG	D1750V2	1750 MHz SAR Dipole	4/30/2013	Annual	4/30/2014	1051
SPEAG	D1765V2	1765 MHz SAR Dipole	5/14/2013	Annual	5/14/2014	1008
SPEAG	D1900V2	1900 MHz SAR Dipole	7/20/2012	Annual	7/20/2013	5d080
SPEAG	D1900V2	1900 MHz SAR Dipole	2/6/2013	Annual	2/6/2014	5d148
SPEAG	D1900V2	1900 MHz SAR Dipole	5/2/2013	Annual	5/2/2014	5d141
SPEAG	D2450V2	2450 MHz SAR Dipole	8/23/2012	Annual	8/23/2013	719
SPEAG	D2600V2	2600 MHz SAR Dipole	5/2/2013	Annual	5/2/2014	1004
SPEAG	D750V3	750 MHz Dipole	1/7/2013	Annual	1/7/2014	1003
SPEAG	D750V3	750 MHz Dipole	3/18/2013	Annual	3/18/2014	1054
SPEAG	D835V2	835 MHz SAR Dipole	8/23/2012	Annual	8/23/2013	4d026
SPEAG	D835V2	835 MHz SAR Dipole	1/7/2013	Annual	1/7/2014	4d132
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/6/2013	Annual	2/6/2014	649
SPEAG	DAE4	Dasy Data Acquisition Electronics	9/19/2012	Annual	9/19/2013	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	11/13/2012	Annual	11/13/2013	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/24/2012	Annual	8/24/2013	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/8/2013	Annual	3/8/2014	1334
SPEAG	ES3DV2	SAR Probe	8/28/2012	Annual	8/28/2013	3022
SPEAG	ES3DV3	SAR Probe	3/15/2013	Annual	3/15/2014	3209
SPEAG	ES3DV3	SAR Probe	9/20/2012	Annual	9/20/2013	3288
SPEAG	ES3DV3	SAR Probe	11/15/2012	Annual	11/15/2013	3287
SPEAG	EX3DV4	SAR Probe	2/27/2013	Annual	2/27/2014	3920

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 85 of 91

Equipment used during entirety of tests:

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	8753E	(30kHz-6GHz) Network Analyzer	4/16/2013	Annual	4/16/2014	JP38020182
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/16/2013	Annual	4/16/2014	MY45470194
Agilent	8648D	(9kHz-4GHz) Signal Generator	4/17/2013	Annual	4/17/2014	3629U00687
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Agilent	85070C	Dielectric Probe Kit	2/14/2013	Annual	2/14/2014	MY44300633
Agilent	E5515C	Wireless Communications Test Set	10/18/2012	Biennial	10/18/2014	GB43193563
Agilent	85047A	S-Parameter Test Set	N/A	N/A	N/A	2904A00579
Amplifier Research	5S1G4	5W, 800MHz-4.2GHz	CBT	N/A	CBT	21910
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	5318
Anritsu	ML2438A	Power Meter	2/14/2013	Annual	2/14/2014	1190013
Anritsu	ML2438A	Power Meter	2/14/2013	Annual	2/14/2014	98150041
Anritsu	ML2438A	Power Meter	12/4/2012	Annual	12/4/2013	1070030
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	5821
Anritsu	MA2481A	Power Sensor	2/14/2013	Annual	2/14/2014	2400
Anritsu	MA2411B	Pulse Sensor	9/19/2012	Annual	9/19/2013	1027293
Anritsu	ML2495A	Power Meter	10/11/2012	Annual	10/11/2013	1039008
Anritsu	MT8820C	Radio Communication Tester	11/6/2012	Annual	11/6/2013	6200901190
Anritsu	MA24106A	USB Power Sensor	8/22/2012	Annual	8/22/2013	1231538
Anritsu	MA24106A	USB Power Sensor	8/22/2012	Annual	8/22/2013	1231535
Anritsu	MA2481D	Universal Sensor	12/17/2012	Annual	12/17/2013	1204419
Anritsu	MA2481D	Universal Sensor	12/17/2012	Annual	12/17/2013	1204343
Anritsu	ML2496A	Power Meter	11/28/2012	Annual	11/28/2013	1138001
Anritsu	MA2411B	Pulse Power Sensor	12/4/2012	Annual	12/4/2013	1207364
Anritsu	MA2411B	Pulse Power Sensor	12/5/2012	Annual	12/5/2013	1126066
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
COMTECH	AR85729-5	Solid State Amplifier	CBT	N/A	CBT	M1S5A00-009
Control Company	36934-158	Wall-Mounted Thermometer	1/4/2012	Biennial	1/4/2014	122014488
Control Company	4353	Long Stem Thermometer	9/25/2012	Biennial	9/25/2014	122539615
Fisher Scientific	15-077-960	Thermometer	11/6/2012	Biennial	11/6/2014	122640025
Fisher Scientific	15-078J	Long Stem Thermometer	10/30/2012	Biennial	10/30/2014	122626059
Gigatronics	80701A	(0.05-18GHz) Power Sensor	10/10/2012	Annual	10/10/2013	1833460
Gigatronics	8651A	Universal Power Meter	10/10/2012	Annual	10/10/2013	8650319
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-S3W2	Attenuator (3dB)	CBT	N/A	CBT	120
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2208-6	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	5/3/2013	Annual	5/3/2014	836371/0079
Rohde & Schwarz	NRVD	Dual Channel Power Meter	10/12/2012	Biennial	10/12/2014	101695
Rohde & Schwarz	NRV-Z32	Peak Power Sensor	10/12/2012	Biennial	10/12/2014	836019/013
Rohde & Schwarz	SMIQ03B	Signal Generator	4/17/2013	Annual	4/17/2014	DE27259
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	10/7/2011	Biennial	10/7/2013	103962
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	2/8/2013	Annual	2/8/2014	101699
Rohde & Schwarz	SME06	Signal Generator	10/11/2012	Annual	10/11/2013	832026
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	9/26/2012	Annual	9/26/2013	108798
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
SPEAG	DAK-3.5	Dielectric Assessment Kit	12/11/2012	Annual	12/11/2013	1091
Tektronix	RSA6114A	Real Time Spectrum Analyzer	4/17/2013	Annual	4/17/2014	B010177
VWR	36934-158	Wall-Mounted Thermometer	9/30/2011	Biennial	9/30/2013	111859323
VWR	36934-158	Wall-Mounted Thermometer	9/30/2011	Biennial	9/30/2013	111859332
VWR	62344-925	Mini-Thermometer	10/24/2011	Biennial	10/24/2013	111886414
VWR	62344-925	Mini-Thermometer	10/24/2011	Biennial	10/24/2013	111886441
VWR	23226-658	Long Stem Thermometer	3/30/2012	Biennial	3/30/2014	122179874
VWR	23226-658	Long Stem Thermometer	5/16/2012	Biennial	5/16/2014	122295544

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

All equipment was calibrated at the time it was used for testing purposes.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 86 of 91

15 MEASUREMENT UNCERTAINTIES

Applicable for frequencies less than 3000 MHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	6.0	N	1	1.0	1.0	6.0	6.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6
Combined Standard Uncertainty (k=1)				RSS			12.1	11.7	299
Expanded Uncertainty (95% CONFIDENCE LEVEL)				k=2			24.2	23.5	

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 87 of 91

Applicable for frequencies up to 6 GHz.

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k	
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i	
Measurement System										
Probe Calibration	E.2.1	6.55	N	1	1.0	1.0	6.6	6.6	∞	
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞	
Hemishperical Isotropy	E.2.2	1.3	N	1	1.0	1.0	1.3	1.3	∞	
Boundary Effect	E.2.3	0.4	N	1	1.0	1.0	0.4	0.4	∞	
Linearity	E.2.4	0.3	N	1	1.0	1.0	0.3	0.3	∞	
System Detection Limits	E.2.5	5.1	N	1	1.0	1.0	5.1	5.1	∞	
Readout Electronics	E.2.6	1.0	N	1	1.0	1.0	1.0	1.0	∞	
Response Time	E.2.7	0.8	R	1.73	1.0	1.0	0.5	0.5	∞	
Integration Time	E.2.8	2.6	R	1.73	1.0	1.0	1.5	1.5	∞	
RF Ambient Conditions	E.6.1	3.0	R	1.73	1.0	1.0	1.7	1.7	∞	
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1.0	1.0	0.2	0.2	∞	
Probe Positioning w/ respect to Phantom	E.6.3	2.9	R	1.73	1.0	1.0	1.7	1.7	∞	
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	1.0	R	1.73	1.0	1.0	0.6	0.6	∞	
Test Sample Related										
Test Sample Positioning	E.4.2	6.0	N	1	1.0	1.0	6.0	6.0	287	
Device Holder Uncertainty	E.4.1	3.32	R	1.73	1.0	1.0	1.9	1.9	∞	
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	1.73	1.0	1.0	2.9	2.9	∞	
Phantom & Tissue Parameters										
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	4.0	R	1.73	1.0	1.0	2.3	2.3	∞	
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞	
Liquid Conductivity - measurement uncertainty	E.3.3	3.8	N	1	0.64	0.43	2.4	1.6	6	
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞	
Liquid Permittivity - measurement uncertainty	E.3.3	4.5	N	1	0.60	0.49	2.7	2.2	6	
Combined Standard Uncertainty (k=1)							RSS	12.4	12.0	299
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.7	24.0	

The above measurement uncertainties are according to IEEE Std. 1528-2003

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 88 of 91

16 CONCLUSION

16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Industry Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 89 of 91

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, June 2001.
- [6] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [7] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [8] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [9] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [10] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [11] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [12] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [13] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [14] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [15] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [16] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [17] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 90 of 91

- [18] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [19] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [20] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [21] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [22] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz), Feb. 2005.
- [23] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 4, March 2010.
- [24] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [25] FCC Public Notice DA-02-1438. Office of Engineering and Technology Announces a Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65, June 19, 2002
- [26] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [27] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v01r02
- [28] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D02-D04
- [29] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [30] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [31] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [32] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [33] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: PY7PM-0430		SAR EVALUATION REPORT	SONY	Reviewed by: Quality Manager
Document S/N: 0Y1307011148.PY7	Test Dates: 05/06/13 - 05/13/13 06/18/13 - 08/08/13	DUT Type: Portable Handset		Page 91 of 91

APPENDIX A: SAR TEST DATA

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8628

Communication System: GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: 835 Head Medium parameters used (interpolated):

$f = 824.2 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 41.373$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 07-25-2013; Ambient Temp: 23.4°C; Tissue Temp: 23.4°C

Probe: ES3DV3 - SN3288; ConvF(6.41, 6.41, 6.41); Calibrated: 9/20/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Mode: GSM 850, Right Head, Cheek, Low.ch


Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.330 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.168 W/kg (SAR corrected for target medium)

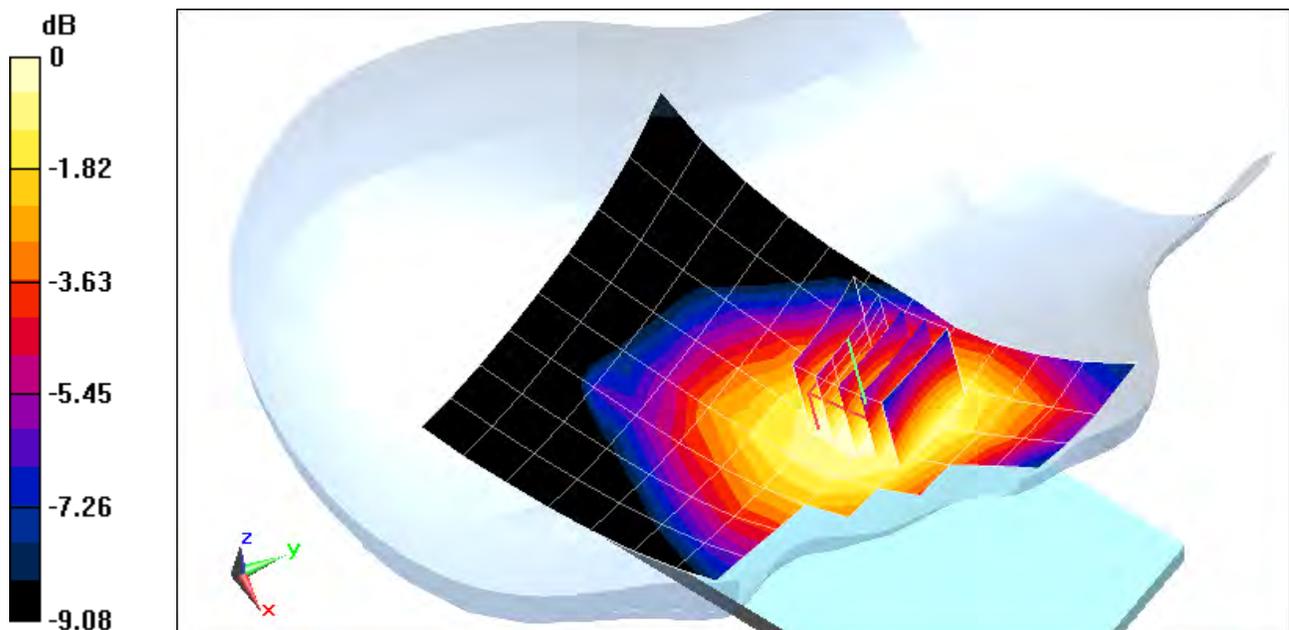

0 dB = 0.220 W/kg = -6.58 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8624

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium: 1900 Head Medium parameters used:

$f = 1910 \text{ MHz}$; $\sigma = 1.398 \text{ S/m}$; $\epsilon_r = 39.883$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 07-15-2013; Ambient Temp: 22.1°C; Tissue Temp: 22.5°C

Probe: ES3DV2 - SN3022; ConvF(4.86, 4.86, 4.86); Calibrated: 8/28/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: GSM 1900, Left Head, Cheek, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.258 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.202 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.073 W/kg (SAR corrected for target medium)

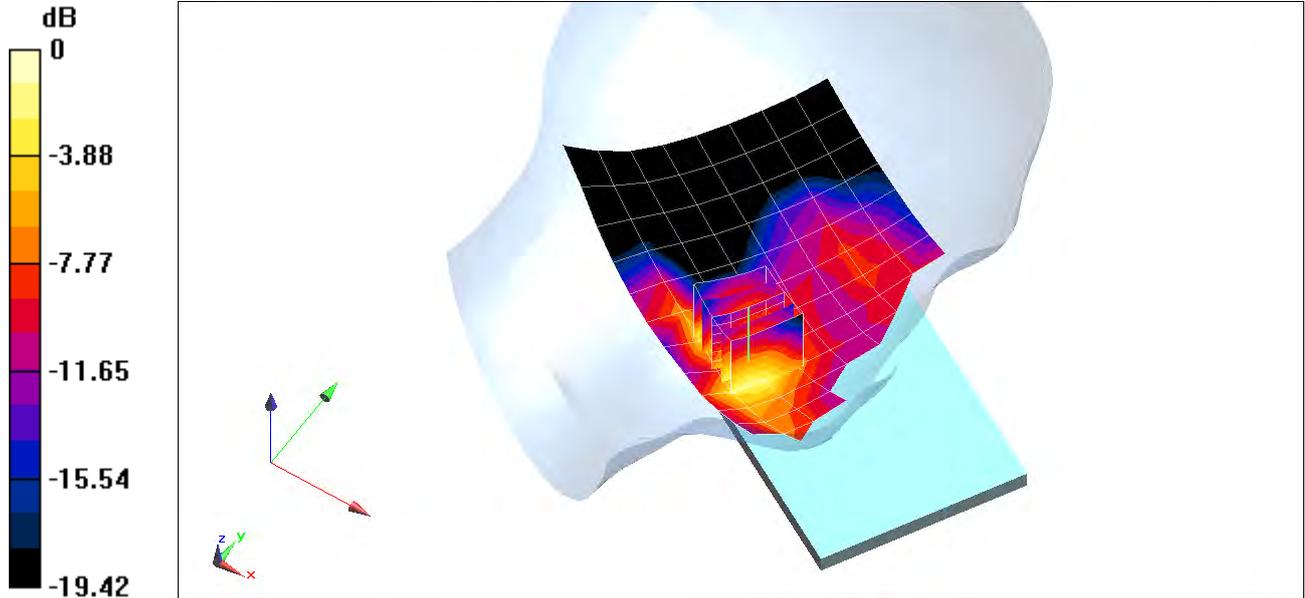

0 dB = 0.141 W/kg = -8.51 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8613

Communication System: UMTS; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 846.6 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 40.532$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 07-23-2013; Ambient Temp: 23.5°C; Tissue Temp: 23.4°C

Probe: ES3DV3 - SN3288; ConvF(6.41, 6.41, 6.41); Calibrated: 9/20/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Mode: UMTS 850, Right Head, Cheek, High.ch


Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.222 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.440 W/kg

SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.268 W/kg (SAR corrected for target medium)

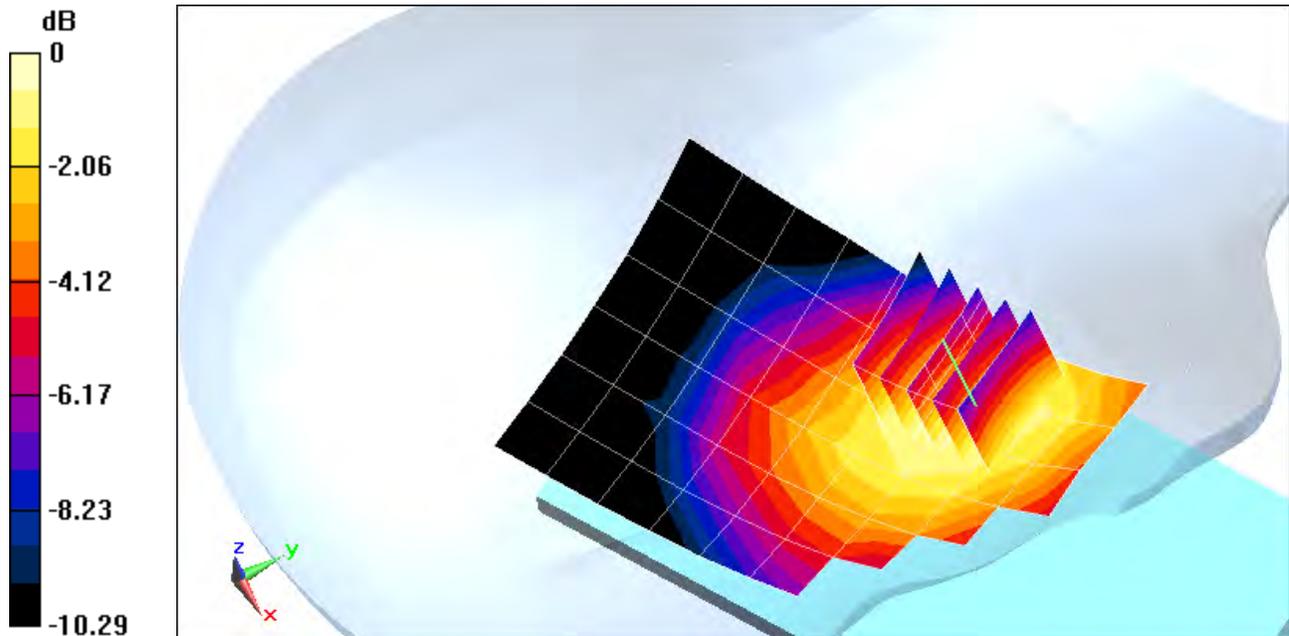

0 dB = 0.365 W/kg = -4.38 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8613

Communication System: UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1907.6 \text{ MHz}$; $\sigma = 1.426 \text{ S/m}$; $\epsilon_r = 40.11$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 07-17-2013; Ambient Temp: 23.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3209; ConvF(5.21, 5.21, 5.21); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: SAM Right; Type: QD000P40CD; Serial: 1686

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: UMTS 1900, Left Head, Cheek, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.107 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.129 W/kg (SAR corrected for target medium)

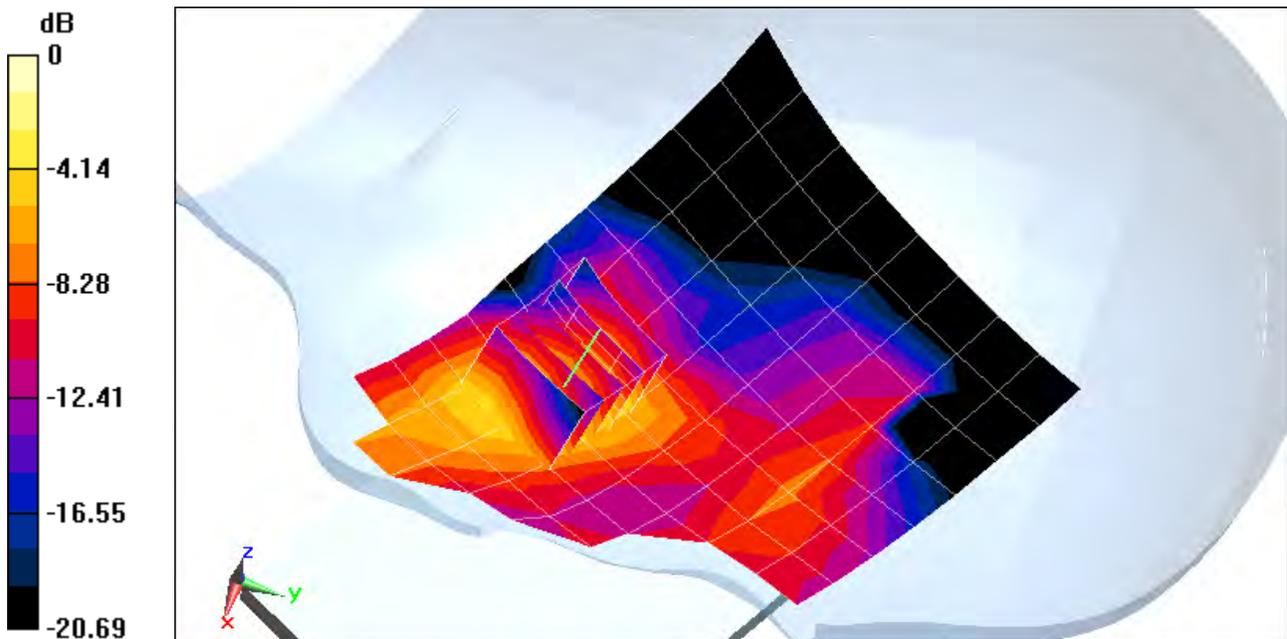

0 dB = 0.256 W/kg = -5.92 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8613

Communication System: AWS WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1712.4 \text{ MHz}$; $\sigma = 1.378 \text{ S/m}$; $\epsilon_r = 39.491$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 07-25-2013; Ambient Temp: 23.3°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3287; ConvF(5.16, 5.16, 5.16); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM with CRP; Type: SAM 4.0; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80);SEMCAD X Version 14.6.10 (7164)

Mode: AWS UMTS, Right Head, Cheek, Low.ch


Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.171 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.168 W/kg (SAR corrected for target medium)

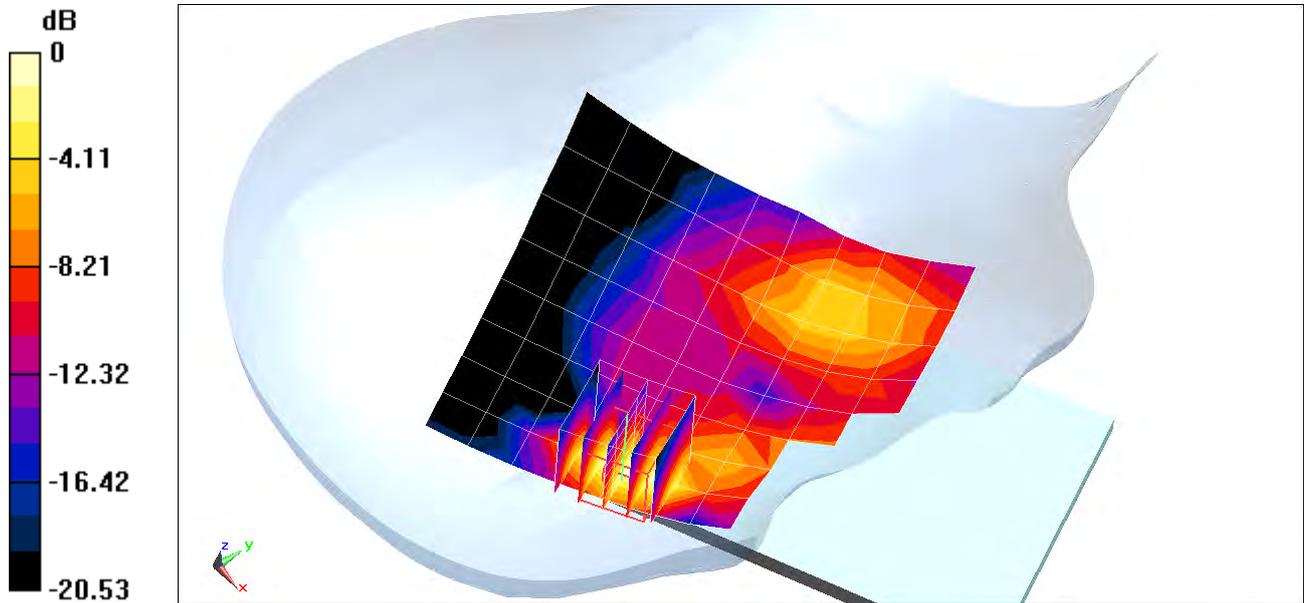

0 dB = 0.396 W/kg = -4.02 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE Band 2 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: 1900 Head Medium parameters used (interpolated):

$$f = 1860 \text{ MHz}; \sigma = 1.38 \text{ S/m}; \epsilon_r = 40.334; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Left Section

Test Date: 07-17-2013; Ambient Temp: 23.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3209; ConvF(5.21, 5.21, 5.21); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: SAM Right; Type: QD000P40CD; Serial: 1686

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 2 (PCS), Left Head, Cheek, Low.ch, QPSK, 20 MHz Bandwidth,
1 RB, 99 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.929 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.098 W/kg (SAR corrected for target medium)

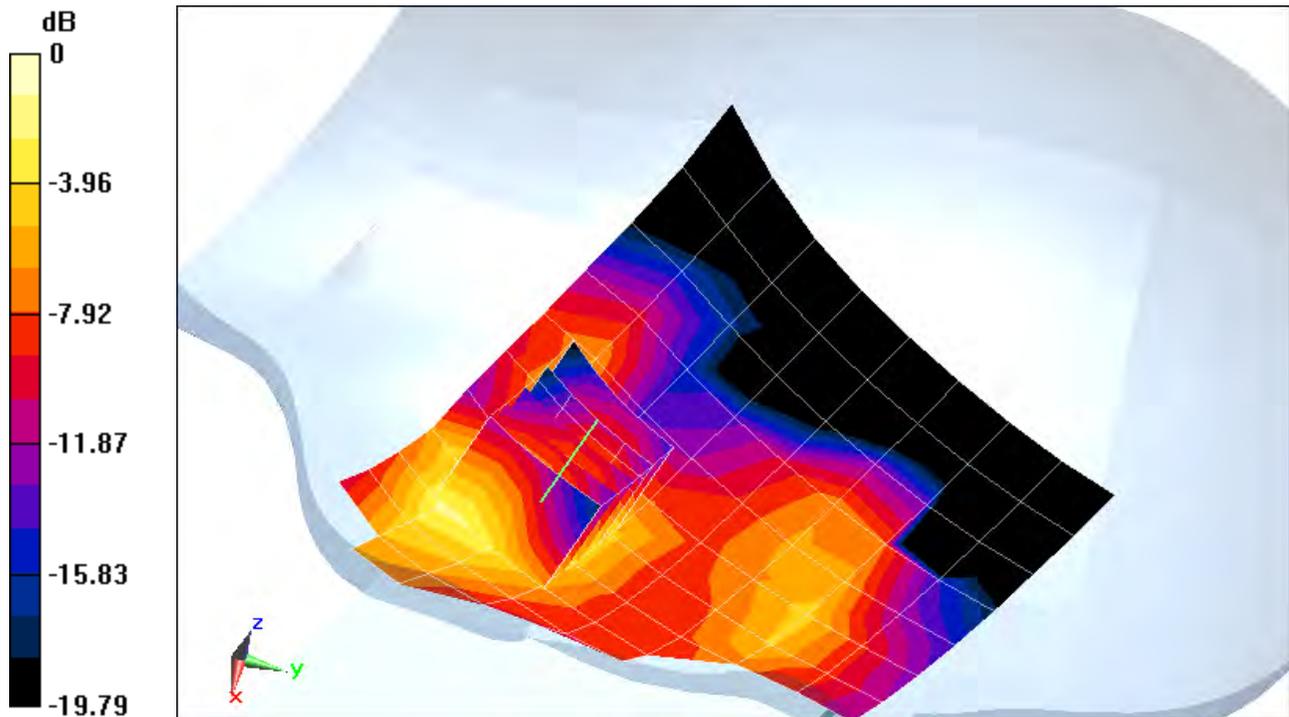

0 dB = 0.176 W/kg = -7.54 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.5$ MHz; $\sigma = 1.394$ S/m; $\epsilon_r = 39.432$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Test Date: 07-25-2013; Ambient Temp: 23.3°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3287; ConvF(5.16, 5.16, 5.16); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM with CRP; Type: SAM 4.0; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 4 (AWS), Right Head, Cheek, Mid.ch, 20 MHz Bandwidth, QPSK,
1 RB, 0 RB Offset**


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.916 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.072 W/kg (SAR corrected for target medium)

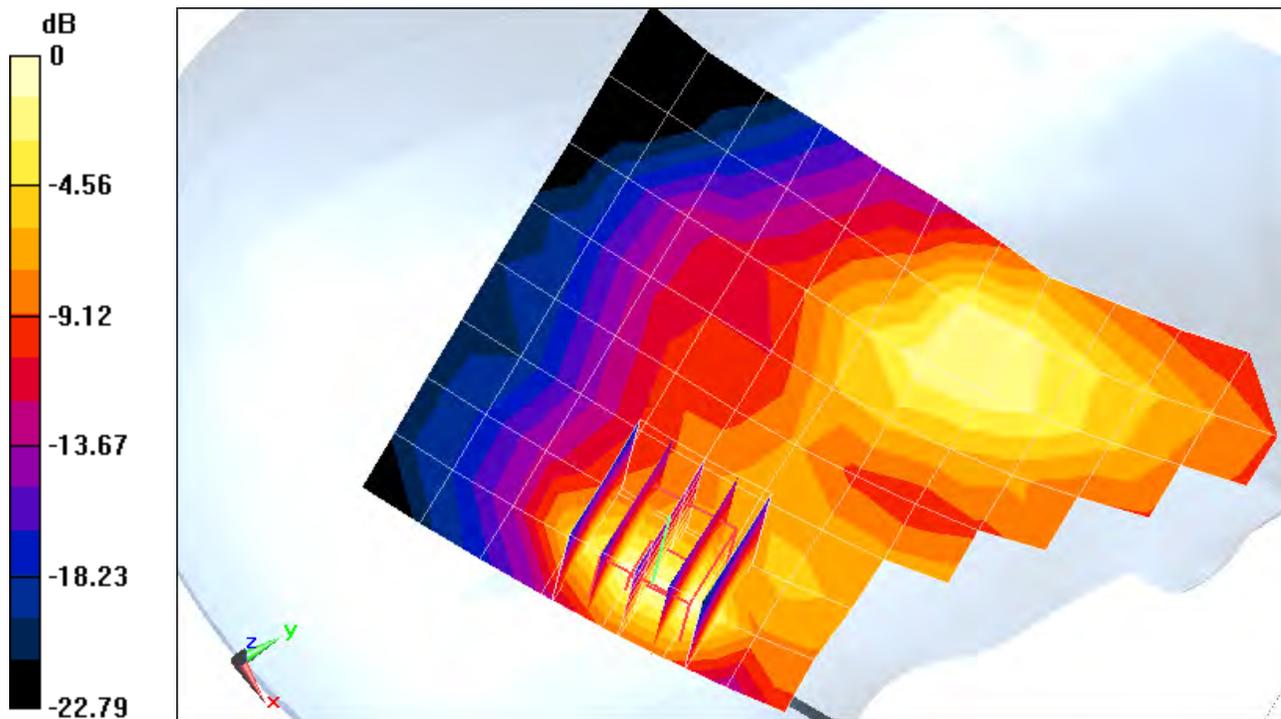

0 dB = 0.175 W/kg = -7.57 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 0.908 \text{ S/m}$; $\epsilon_r = 40.579$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 07-10-2013; Ambient Temp: 24.2°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3288; ConvF(6.41, 6.41, 6.41); Calibrated: 9/20/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 5 (Cell.), Right Head, Cheek, Mid.ch, 10 MHz Bandwidth, QPSK,
1 RB, 49 RB Offset**


Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.299 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.165 W/kg (SAR corrected for target medium)

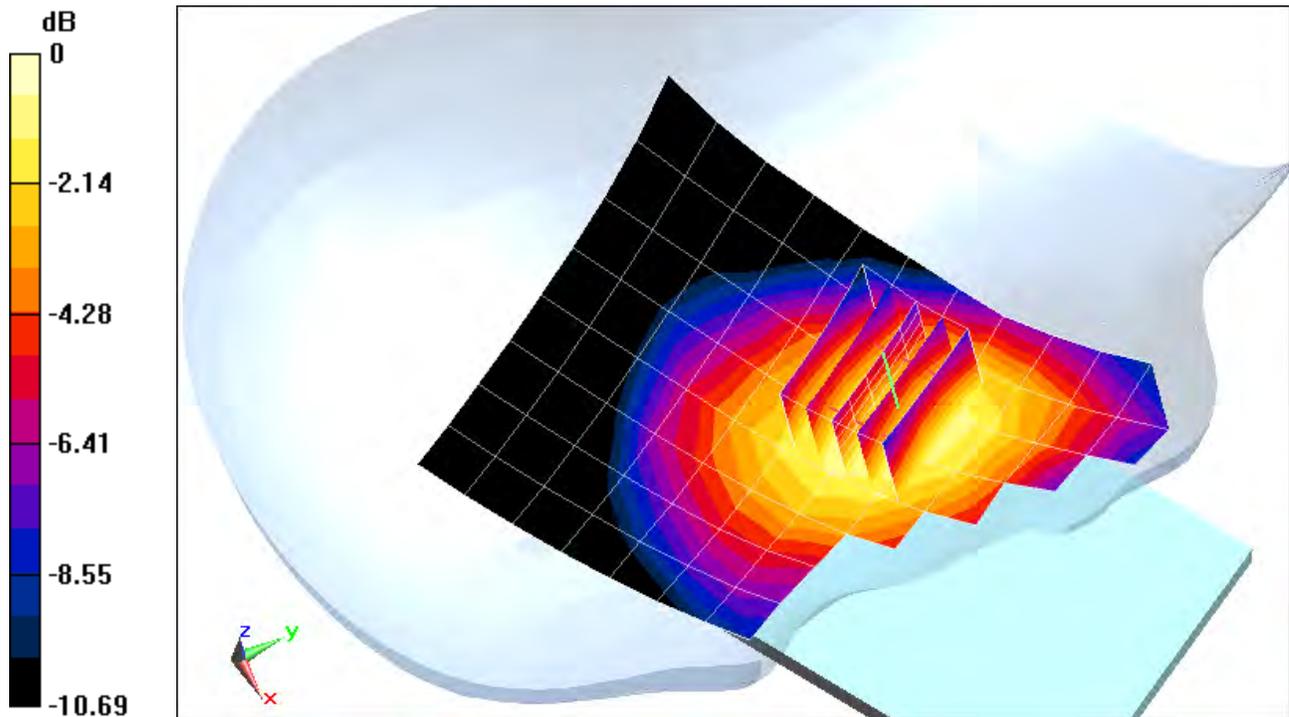

0 dB = 0.228 W/kg = -6.42 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE BAND 17; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 740 Head Medium parameters used:

$f = 710 \text{ MHz}$; $\sigma = 0.885 \text{ S/m}$; $\epsilon_r = 41.298$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 07-17-2013; Ambient Temp: 21.0°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(6.3, 6.3, 6.3); Calibrated: 8/28/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 17, Left Head, Cheek, Mid.ch, 10 MHz Bandwidth, QPSK,
1 RB, 0 RB Offset**


Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.508 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.055 W/kg (SAR corrected for target medium)

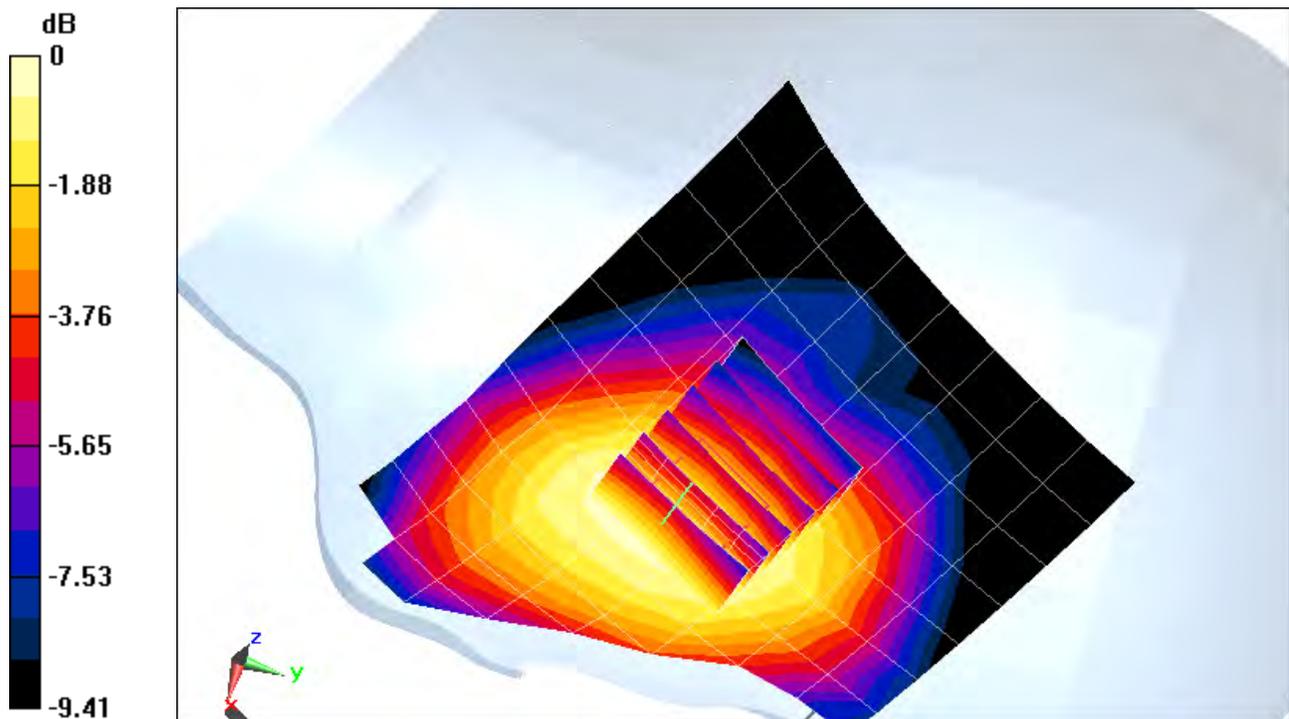

0 dB = 0.0721 W/kg = -11.42 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE BAND 7; Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: 2600 Head Medium parameters used (interpolated):

$f = 2510 \text{ MHz}$; $\sigma = 1.915 \text{ S/m}$; $\epsilon_r = 38.235$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 07-18-2013; Ambient Temp: 23.0°C; Tissue Temp: 23.5°C

Probe: ES3DV2 - SN3022; ConvF(4.23, 4.23, 4.23); Calibrated: 8/28/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 7, Left Head, Cheek, Low.ch, 20 MHz Bandwidth, QPSK,
1 RB, 50 RB Offset**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.574 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.658 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.177 W/kg (SAR corrected for target medium)

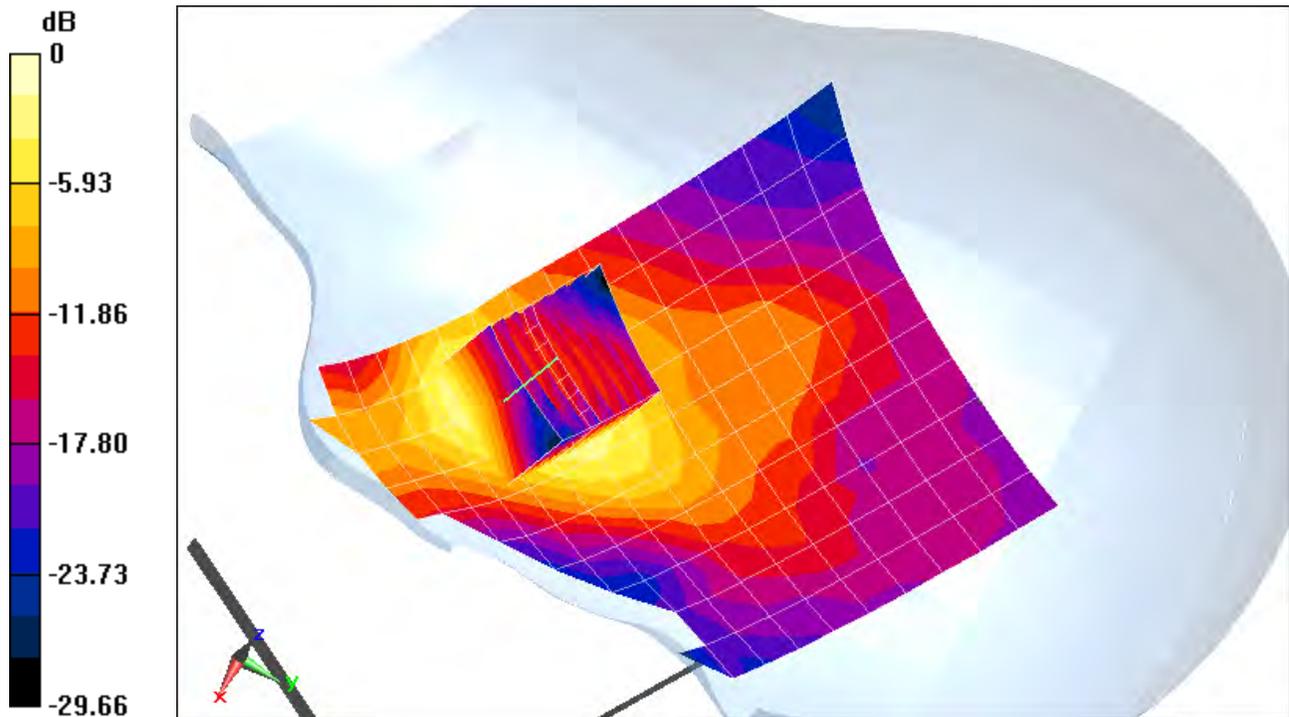

0 dB = 0.457 W/kg = -3.40 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0410; Type: Portable Handset; Serial: 6717

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 1.862 \text{ S/m}$; $\epsilon_r = 40.038$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 06-18-2013; Ambient Temp: 23.4°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3287; ConvF(4.3, 4.3, 4.3); Calibrated: 11/15/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11b, Left Head, Cheek, Ch 06, 1 Mbps


Area Scan (10x15x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.154 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.40 W/kg

SAR(1 g) = 0.902 W/kg; SAR(10 g) = 0.342 W/kg (SAR corrected for target medium)

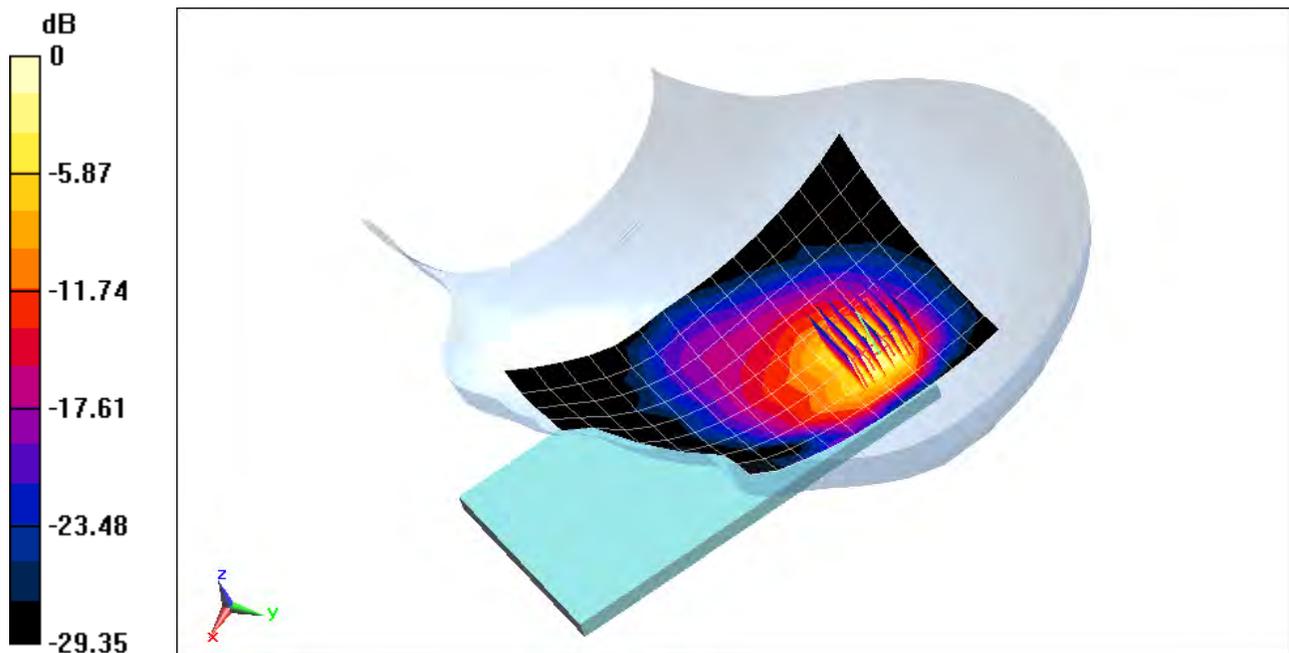

0 dB = 1.27 W/kg = 1.04 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 3037

Communication System: IEEE 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1
Medium: 5 GHz Head; Medium parameters used:

$$f = 5825 \text{ MHz}; \sigma = 5.084 \text{ S/m}; \epsilon_r = 35.262; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Left Section

Test Date: 05-13-2013; Ambient Temp: 22.1°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN3920; ConvF(4.02, 4.02, 4.02); Calibrated: 2/27/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11a, 5.8 GHz, Left Head, Cheek, Ch 165, 6 Mbps


Area Scan (13x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 11.393 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 5.06 W/kg

SAR(1 g) = 0.958 W/kg; SAR(10 g) = 0.296 W/kg (SAR corrected for target medium)

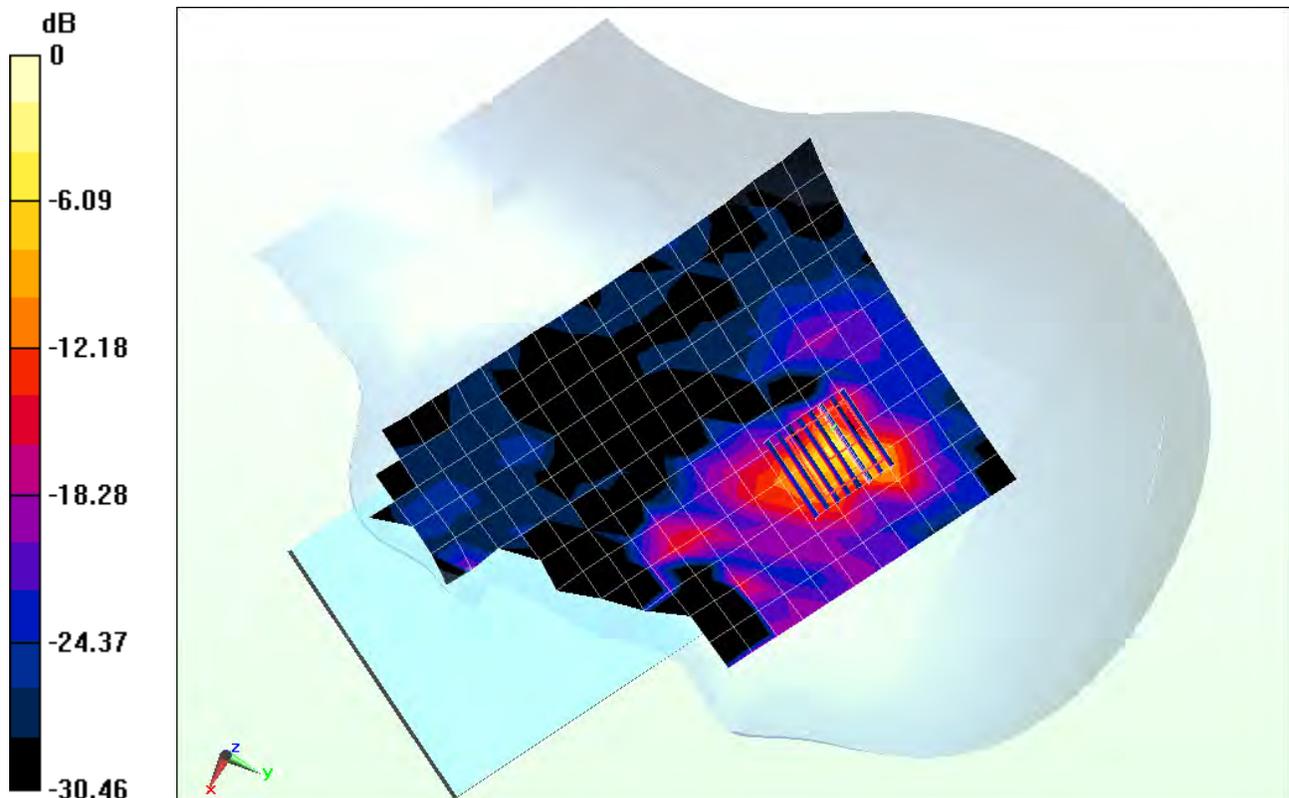

0 dB = 2.84 W/kg = 4.53 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 3037

Communication System: IEEE 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used:

$$f = 5240 \text{ MHz}; \sigma = 4.516 \text{ S/m}; \epsilon_r = 37.189; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Left Section

Test Date: 05-09-2013; Ambient Temp: 24.4°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN3920; ConvF(4.87, 4.87, 4.87); Calibrated: 2/27/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11a, 5.2 GHz, Left Head, Cheek, Ch 48, 6 Mbps


Area Scan (13x21x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 12.812 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.88 W/kg

SAR(1 g) = 0.789 W/kg; SAR(10 g) = 0.233 W/kg (SAR corrected for target medium)

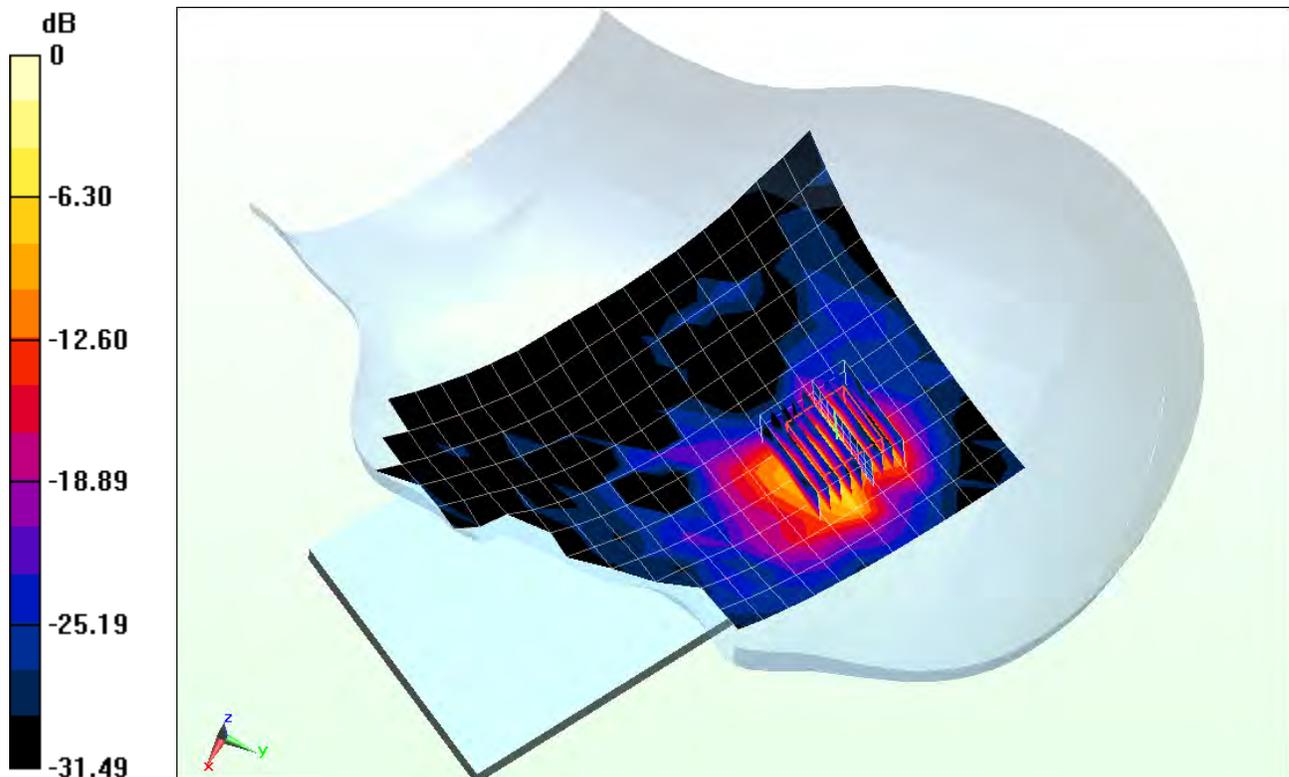

0 dB = 2.27 W/kg = 3.56 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8628

Communication System: GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: 835 Body Medium parameters used (interpolated):

$f = 848.8$ MHz; $\sigma = 1.029$ S/m; $\epsilon_r = 55.522$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-08-2013; Ambient Temp: 24.9°C; Tissue Temp: 23.5°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: GSM 850, Body SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.134 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.516 W/kg

SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.232 W/kg (SAR corrected for target medium)

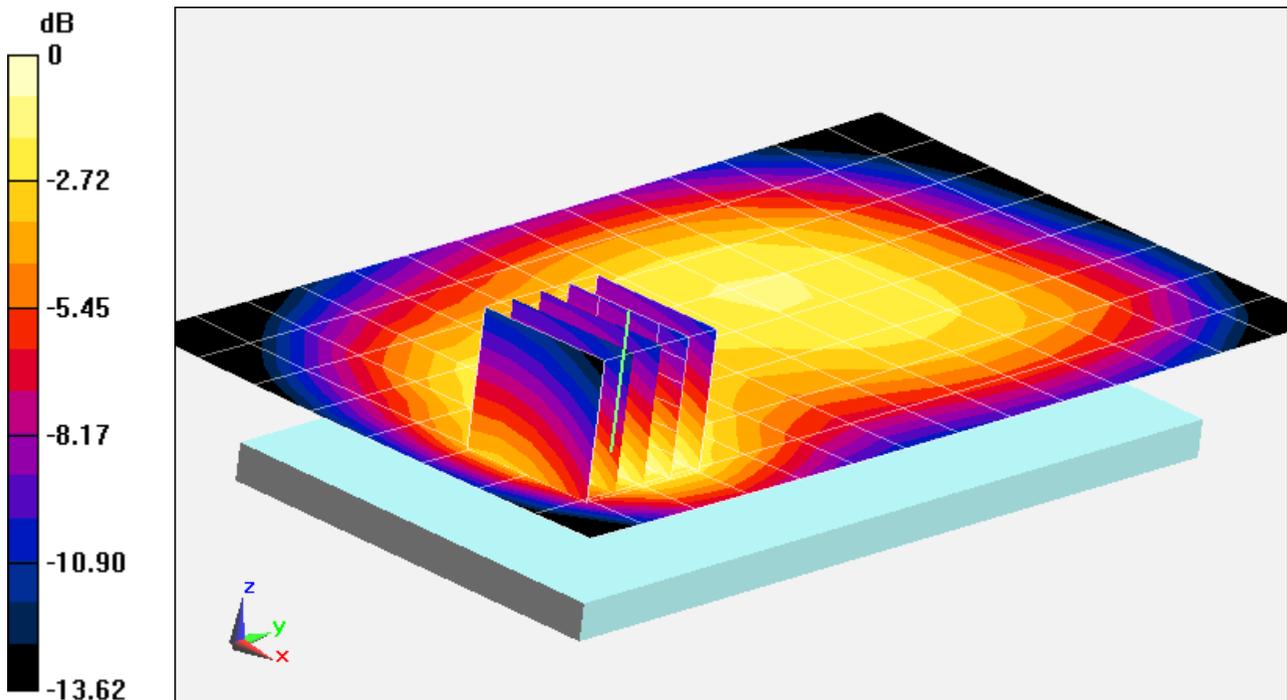

0 dB = 0.373 W/kg = -4.28 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8628

Communication System: GPRS; 4 Tx slots; Frequency: 824.2 MHz; Duty Cycle: 1:2.076

Medium: 835 Body Medium parameters used (interpolated):

$$f = 824.2 \text{ MHz}; \sigma = 1.004 \text{ S/m}; \epsilon_r = 55.822; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-08-2013; Ambient Temp: 24.9°C; Tissue Temp: 23.5°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: GPRS 850, Body SAR, Back side, Low.ch, 4 Tx Slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.889 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.988 W/kg; SAR(10 g) = 0.647 W/kg (SAR corrected for target medium)

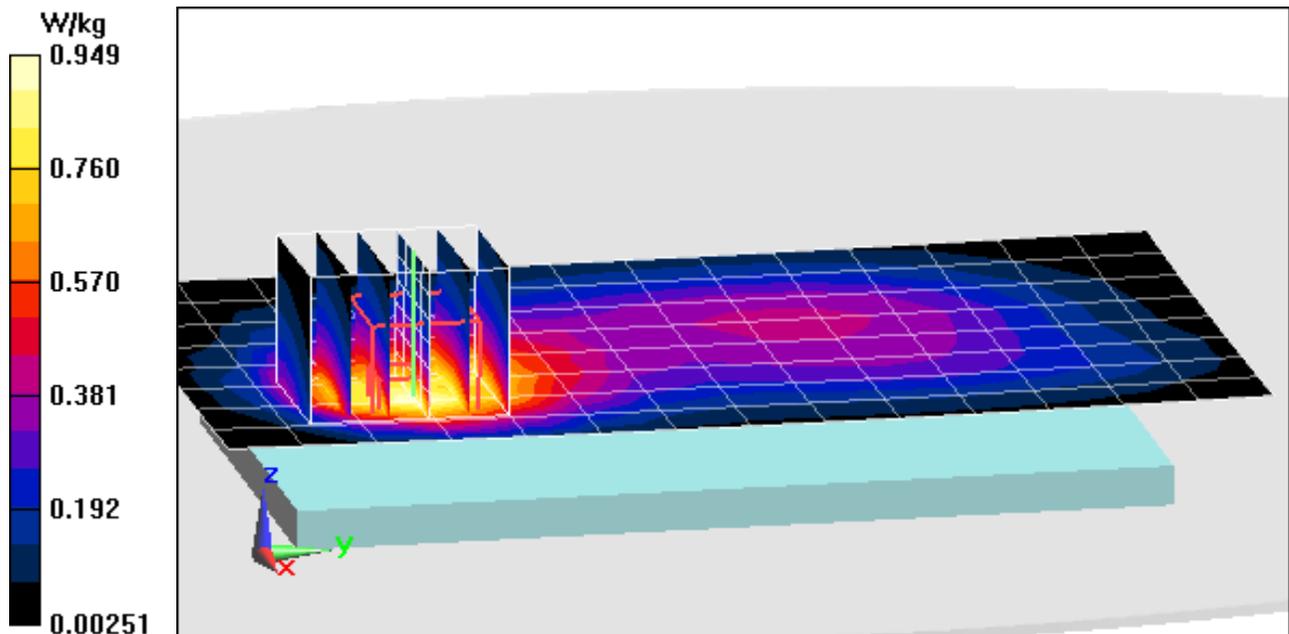

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8628

Communication System: GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: 1900 Body Medium parameters used:

$f = 1910 \text{ MHz}$; $\sigma = 1.519 \text{ S/m}$; $\epsilon_r = 51.933$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-22-2013; Ambient Temp: 22.8°C; Tissue Temp: 23.4°C

Probe: EX3DV4 - SN3920; ConvF(7.38, 7.38, 7.38); Calibrated: 2/27/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: GSM 1900, Body SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.841 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.258 W/kg (SAR corrected for target medium)

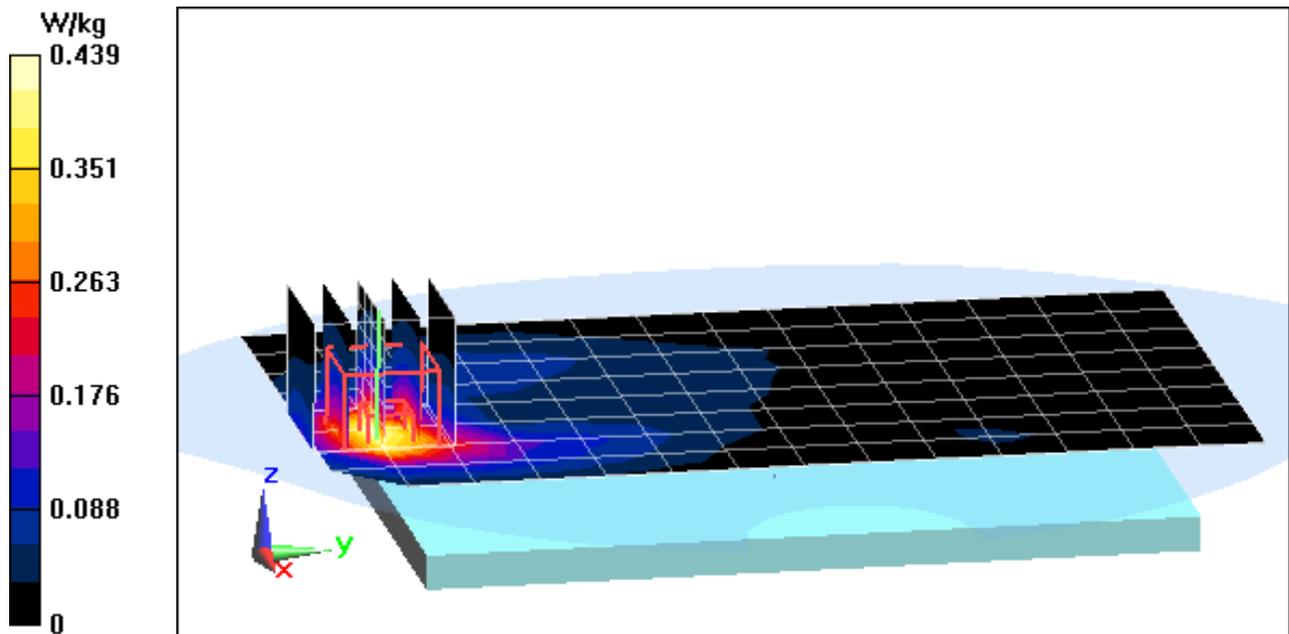

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8624

Communication System: GSM1900 GPRS; Frequency: 1909.8 MHz; Duty Cycle: 1:2.076

Medium: 1900 Body , Medium parameters used:

$f = 1910 \text{ MHz}; \sigma = 1.553 \text{ S/m}; \epsilon_r = 54.032; \rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-08-2013; Ambient Temp: 23.2°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3287; ConvF(4.69, 4.69, 4.69); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: GPRS 1900, Body SAR, Back side, High.ch, 4 Tx Slots


Area Scan (9x16x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.108 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.784 W/kg; SAR(10 g) = 0.394 W/kg (SAR corrected for target medium)

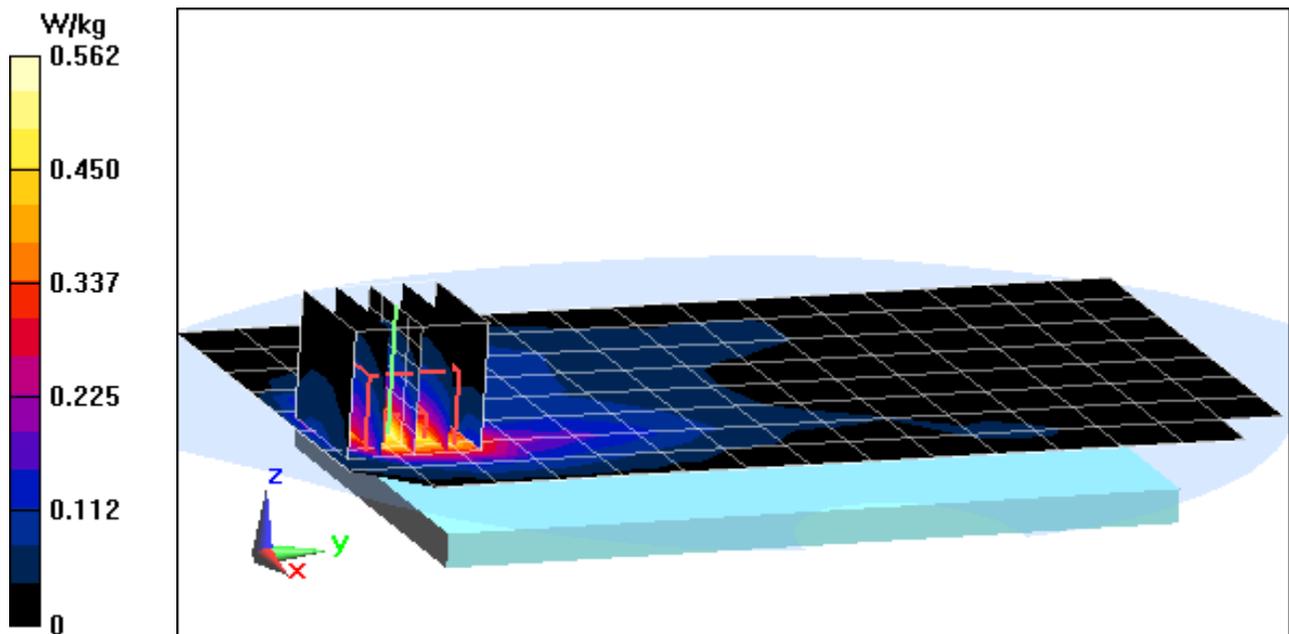

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8617

Communication System: UMTS, Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 846.6 \text{ MHz}$; $\sigma = 1.026 \text{ S/m}$; $\epsilon_r = 55.55$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-08-2013; Ambient Temp: 24.9°C; Tissue Temp: 23.5°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Mode: UMTS 850, Body SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.389 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.295 W/kg (SAR corrected for target medium)

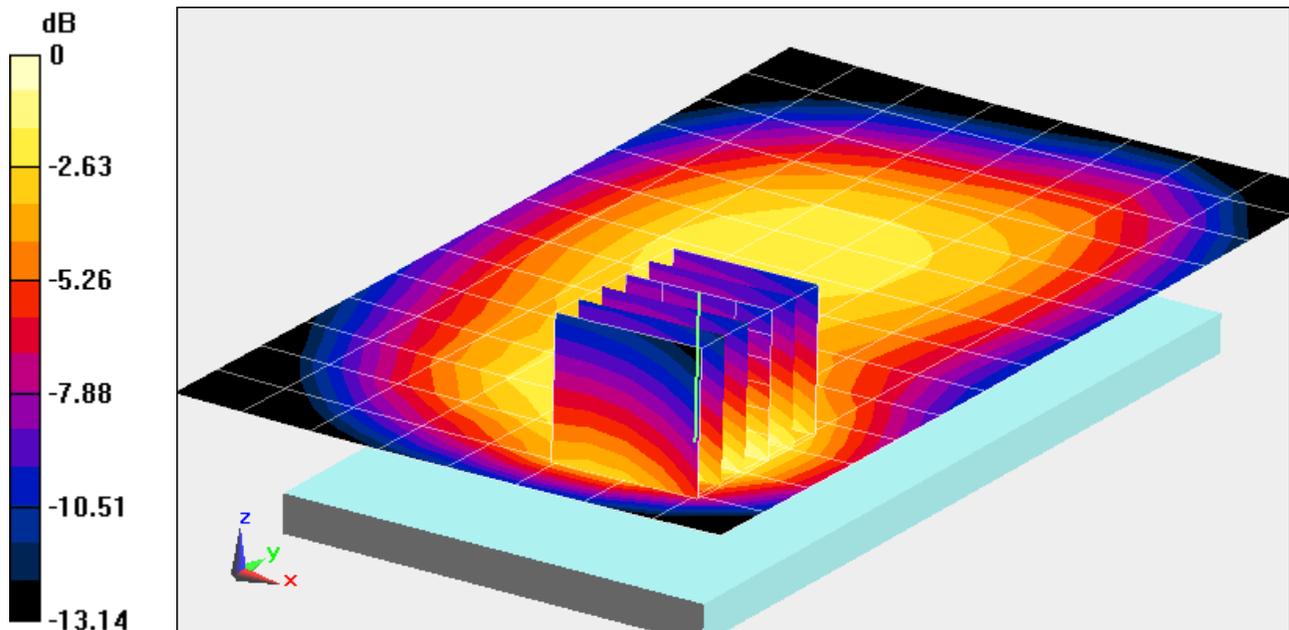

0 dB = 0.464 W/kg = -3.33 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8617

Communication System: UMTS, Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 846.6 \text{ MHz}$; $\sigma = 1.026 \text{ S/m}$; $\epsilon_r = 55.55$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-08-2013; Ambient Temp: 24.9°C; Tissue Temp: 23.5°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Mode: UMTS 850, Body SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.827 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.873 W/kg; SAR(10 g) = 0.553 W/kg (SAR corrected for target medium)

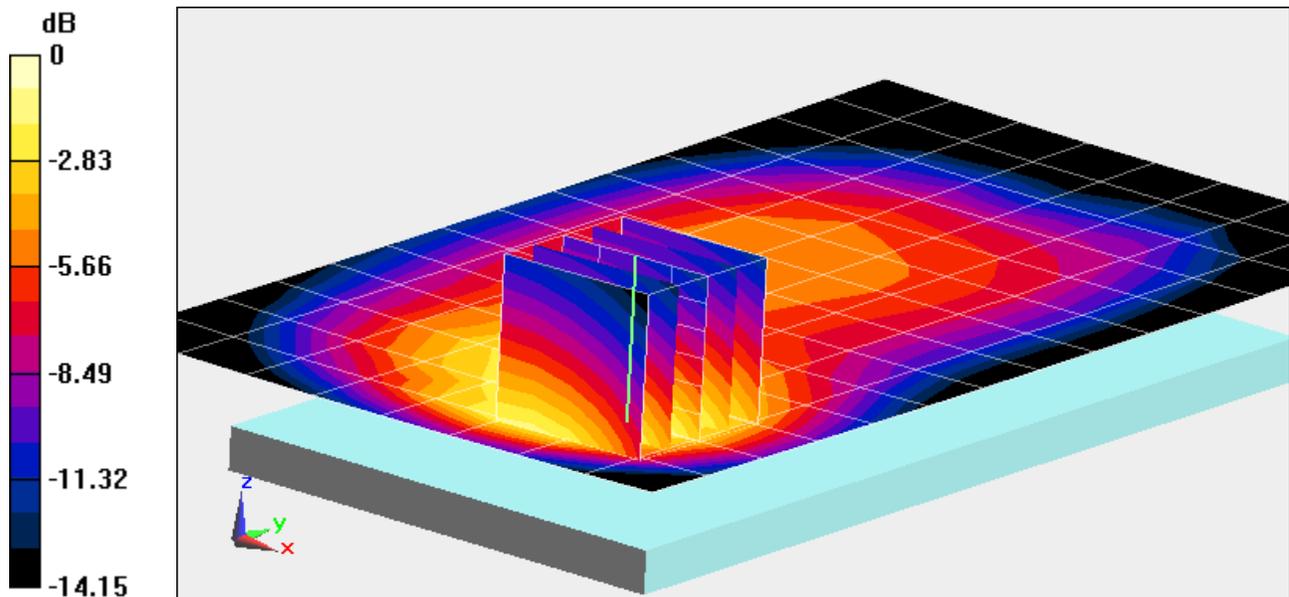

0 dB = 0.942 W/kg = -0.26 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8617

Communication System: UMTS; Frequency: 1880 MHz, Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1907.6 \text{ MHz}$; $\sigma = 1.525 \text{ S/m}$; $\epsilon_r = 53.087$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-25-2013; Ambient Temp: 24.2°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN3920; ConvF(7.38, 7.38, 7.38); Calibrated: 2/27/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: UMTS 1900, Body SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.828 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.861 W/kg; SAR(10 g) = 0.476 W/kg (SAR corrected for target medium)

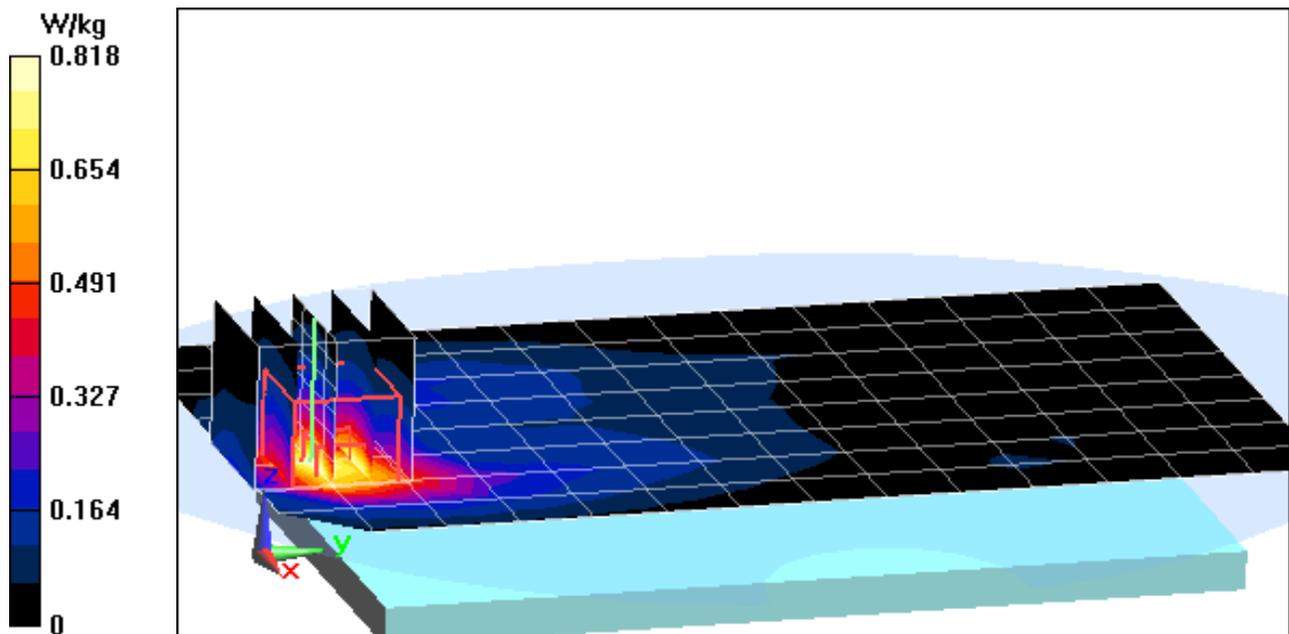

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8617

Communication System: UMTS1900; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1907.6 \text{ MHz}$; $\sigma = 1.55 \text{ S/m}$; $\epsilon_r = 54.039$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-08-2013; Ambient Temp: 23.2°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3287; ConvF(4.69, 4.69, 4.69); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: UMTS 1900, Body SAR, Back side, High.ch


Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.775 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.535 W/kg (SAR corrected for target medium)

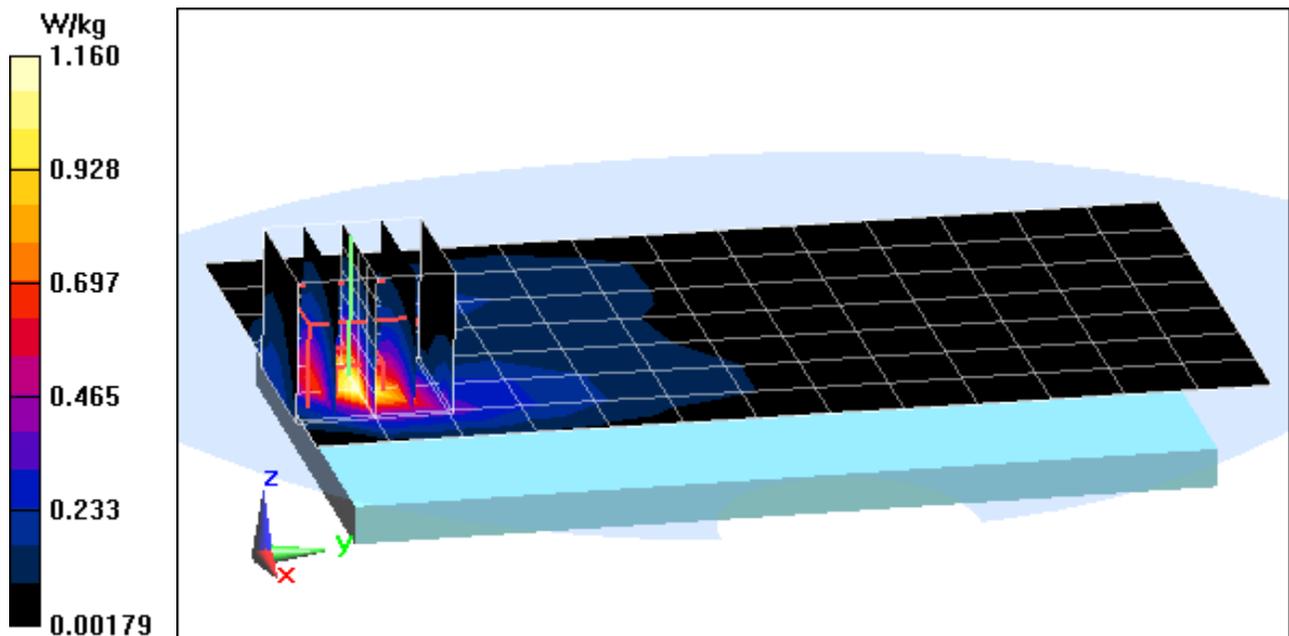

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8617

Communication System: AWS WCDMA; Frequency: 1752.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1752.5 \text{ MHz}$; $\sigma = 1.481 \text{ S/m}$; $\epsilon_r = 51.219$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-26-2013; Ambient Temp: 23.7°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3287; ConvF(4.86, 4.86, 4.86); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: AWS UMTS, Body SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.331 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.479 W/kg (SAR corrected for target medium)

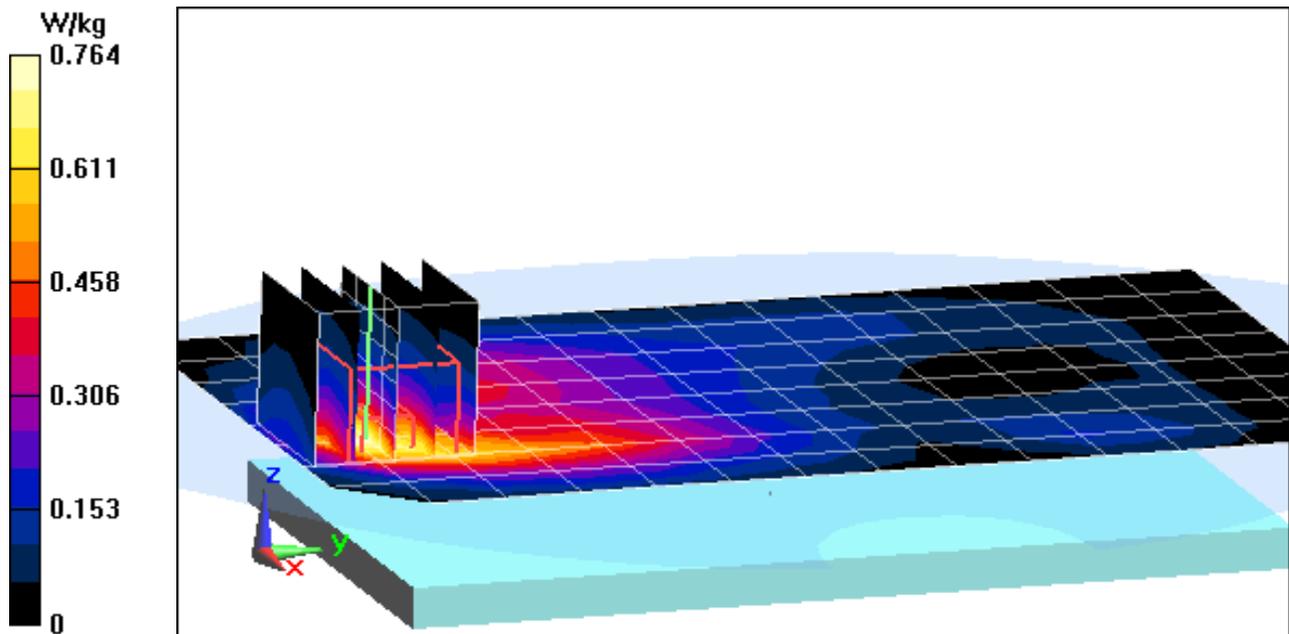

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8613

Communication System: UMTS; Frequency: 1752.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1752.5 \text{ MHz}$; $\sigma = 1.452 \text{ S/m}$; $\epsilon_r = 53.188$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-15-2013; Ambient Temp: 21.9°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3288; ConvF(5.18, 5.18, 5.18); Calibrated: 9/20/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: AWS UMTS, Body SAR, Back side, High.ch


Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.304 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.757 W/kg; SAR(10 g) = 0.404 mW/g (SAR corrected for target medium)

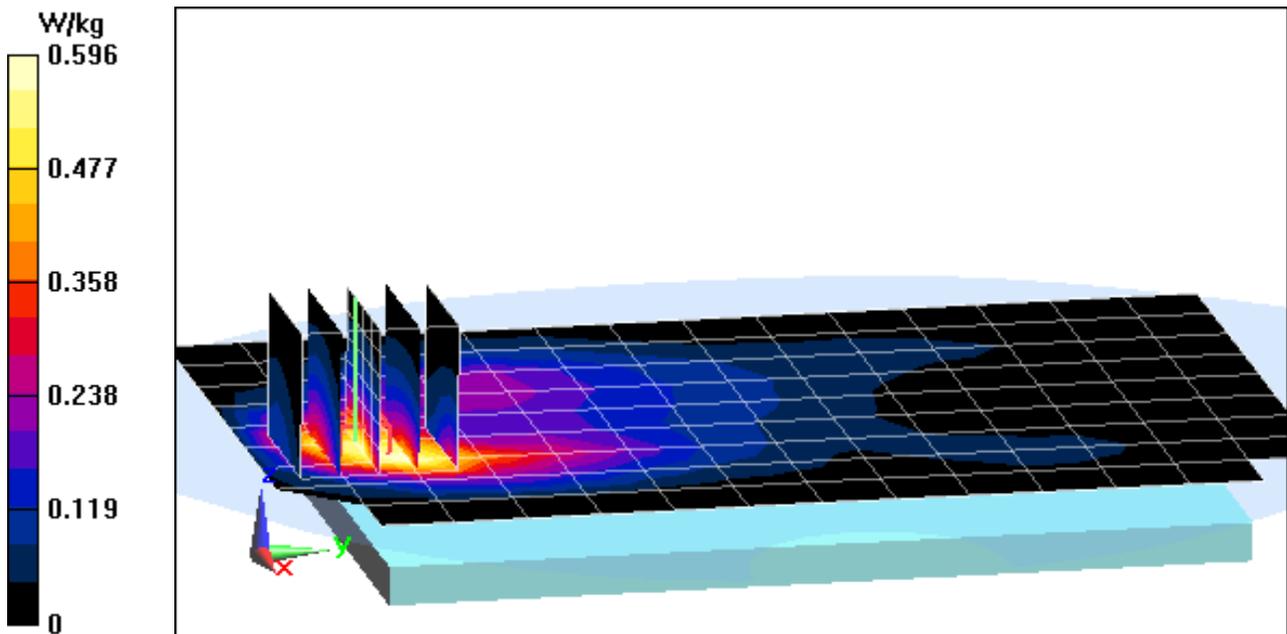

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE Band 2 (PCS); Frequency: 1900 MHz, Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$$f = 1900 \text{ MHz}; \sigma = 1.517 \text{ S/m}; \epsilon_r = 53.11; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-25-2013; Ambient Temp: 24.2°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN3920; ConvF(7.38, 7.38, 7.38); Calibrated: 2/27/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 2 (PCS), Body SAR, Back side, High.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 50 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.647 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.765 W/kg; SAR(10 g) = 0.418 W/kg (SAR corrected for target medium)

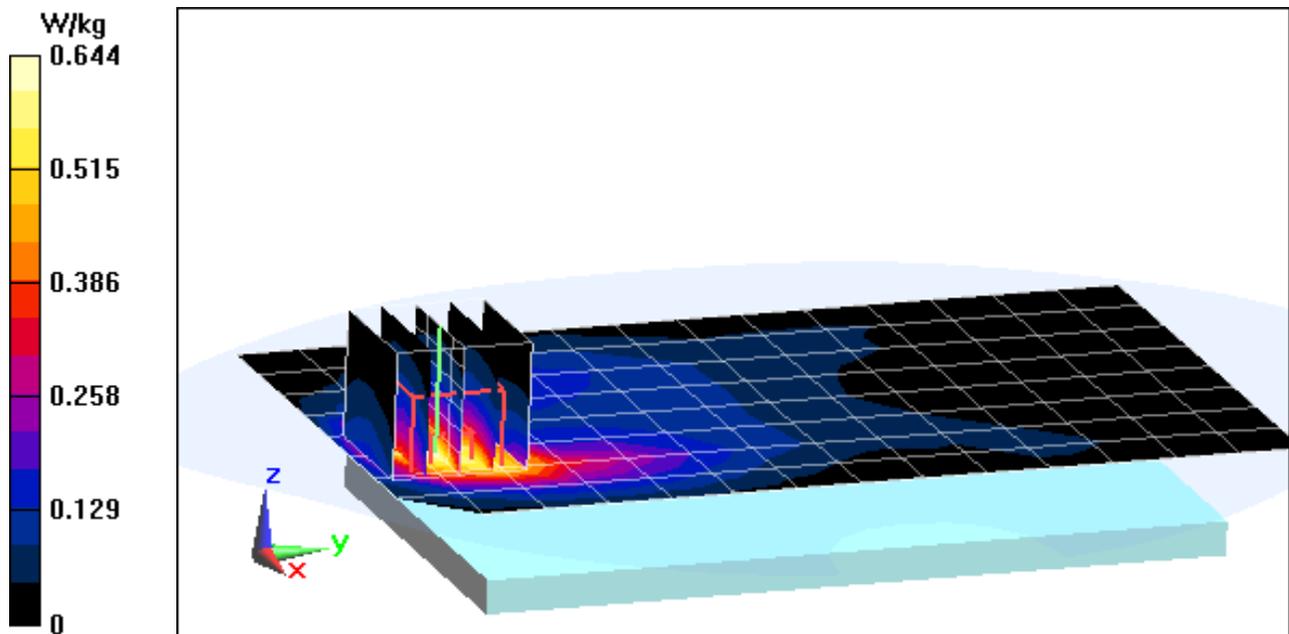

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.502 \text{ S/m}$; $\epsilon_r = 52.425$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-11-2013; Ambient Temp: 23.9°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN3920; ConvF(7.59, 7.59, 7.59); Calibrated: 2/27/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.576 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.939 W/kg

SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.343 W/kg (SAR corrected for target medium)

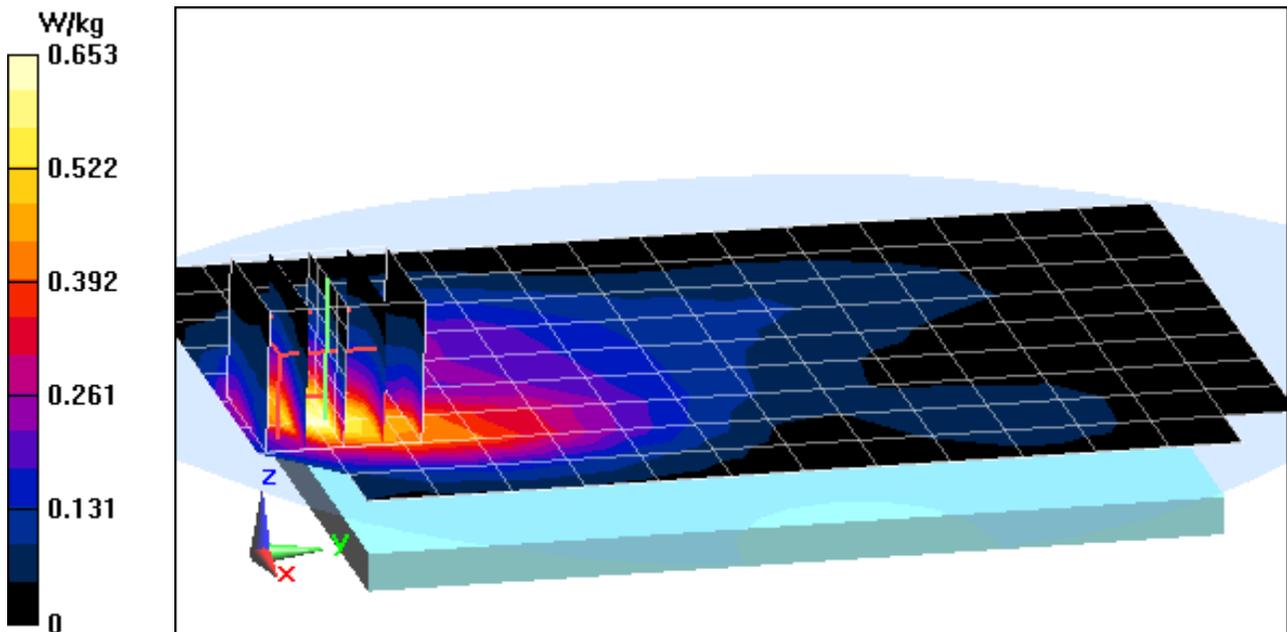

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 1.016 \text{ S/m}$; $\epsilon_r = 55.676$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-08-2013; Ambient Temp: 24.9°C; Tissue Temp: 23.5°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch, 10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.889 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.180 W/kg (SAR corrected for target medium)

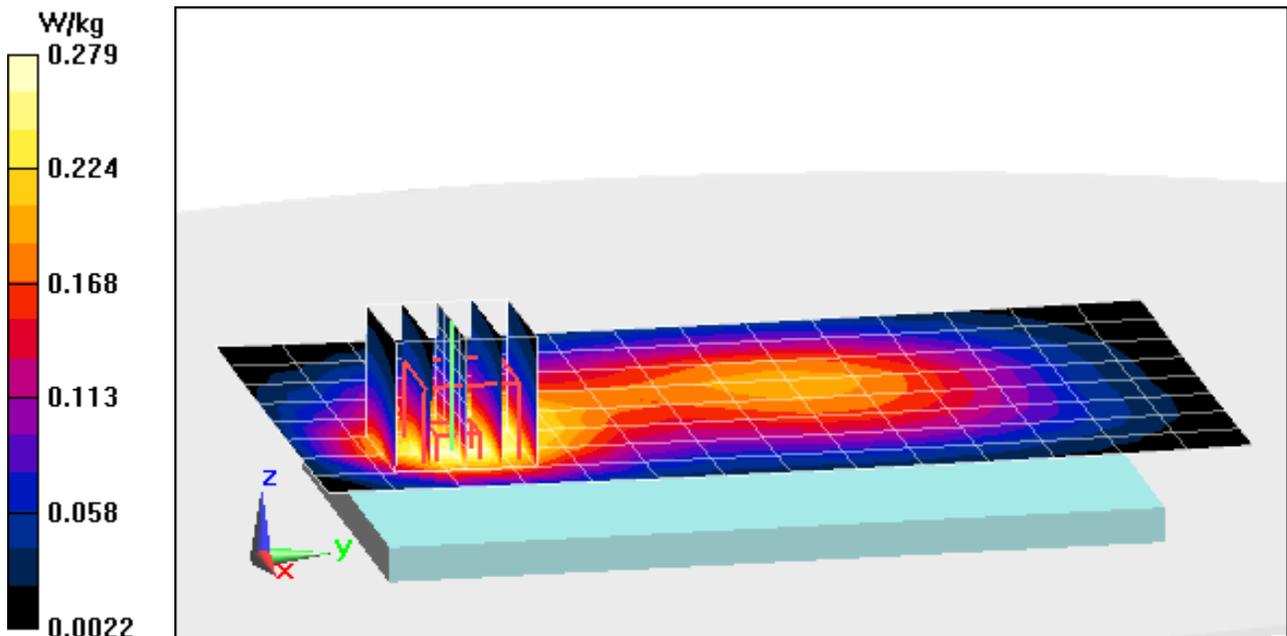

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used:

$$f = 710 \text{ MHz}; \sigma = 0.928 \text{ S/m}; \epsilon_r = 55.352; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-14-2013; Ambient Temp: 24.5°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3209; ConvF(6.38, 6.38, 6.38); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 17, Body SAR, Back side, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.567 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.079 W/kg (SAR corrected for target medium)

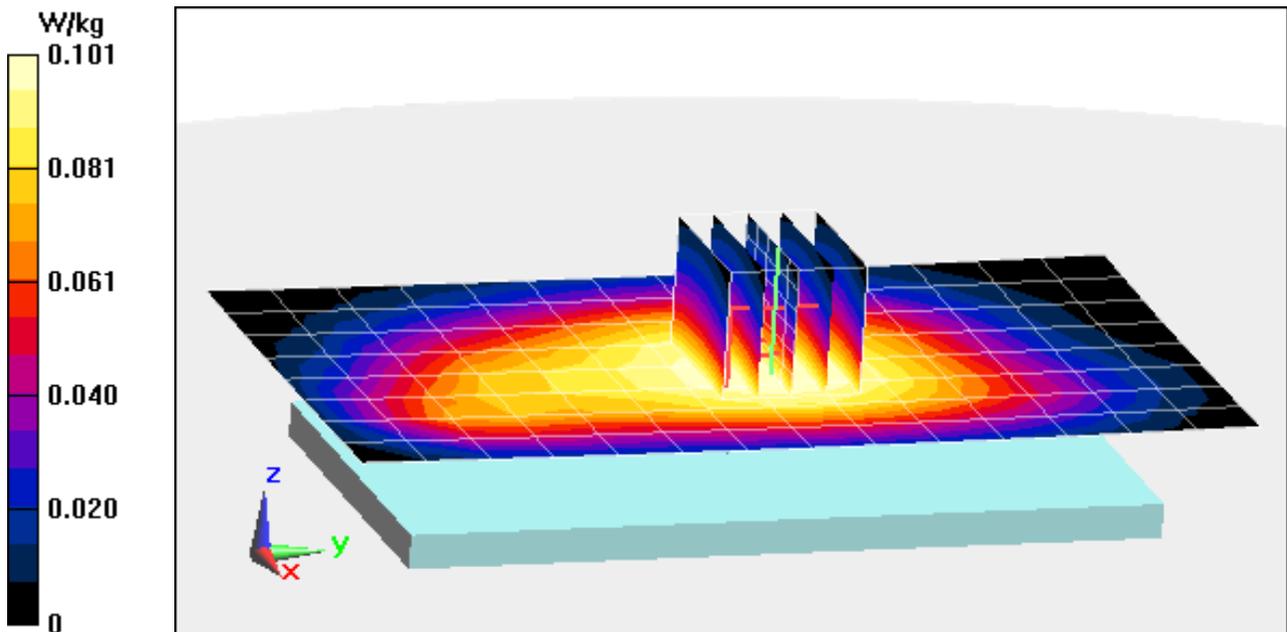

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2600 Body Medium parameters used (interpolated):

$$f = 2535 \text{ MHz}; \sigma = 2.15 \text{ S/m}; \epsilon_r = 52.318; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-22-2013; Ambient Temp: 23.0°C; Tissue Temp: 22.6°C

Probe: ES3DV2 - SN3022; ConvF(3.8, 3.8, 3.8); Calibrated: 8/28/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 7, Body SAR, Back side, Mid.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 99 RB Offset**


Area Scan (11x19x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.351 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.319 W/kg (SAR corrected for target medium)

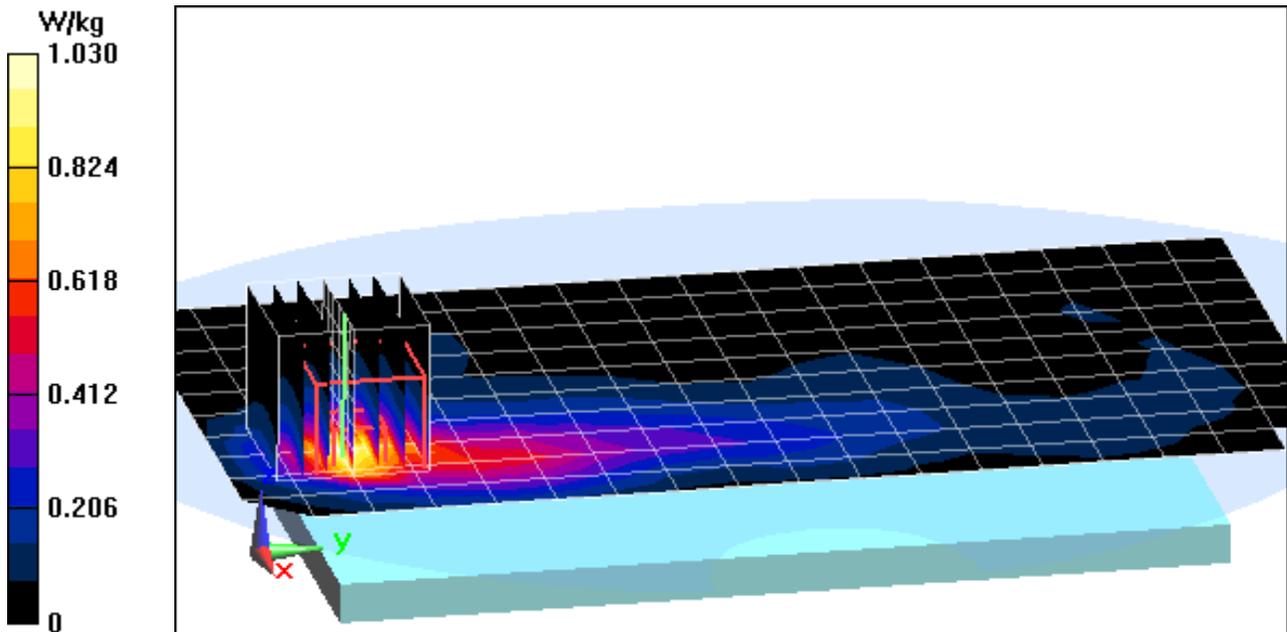

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0410; Type: Portable Handset; Serial: 6717

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 2.027 \text{ S/m}$; $\epsilon_r = 50.263$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 06-18-2013; Ambient Temp: 22.9°C; Tissue Temp: 22.7°C

Probe: ES3DV2 - SN3022; ConvF(3.97, 3.97, 3.97); Calibrated: 8/28/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11b, Body SAR, Ch 06, 1 Mbps, Front Side


Area Scan (11x19x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.724 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.062 W/kg (SAR corrected for target medium)

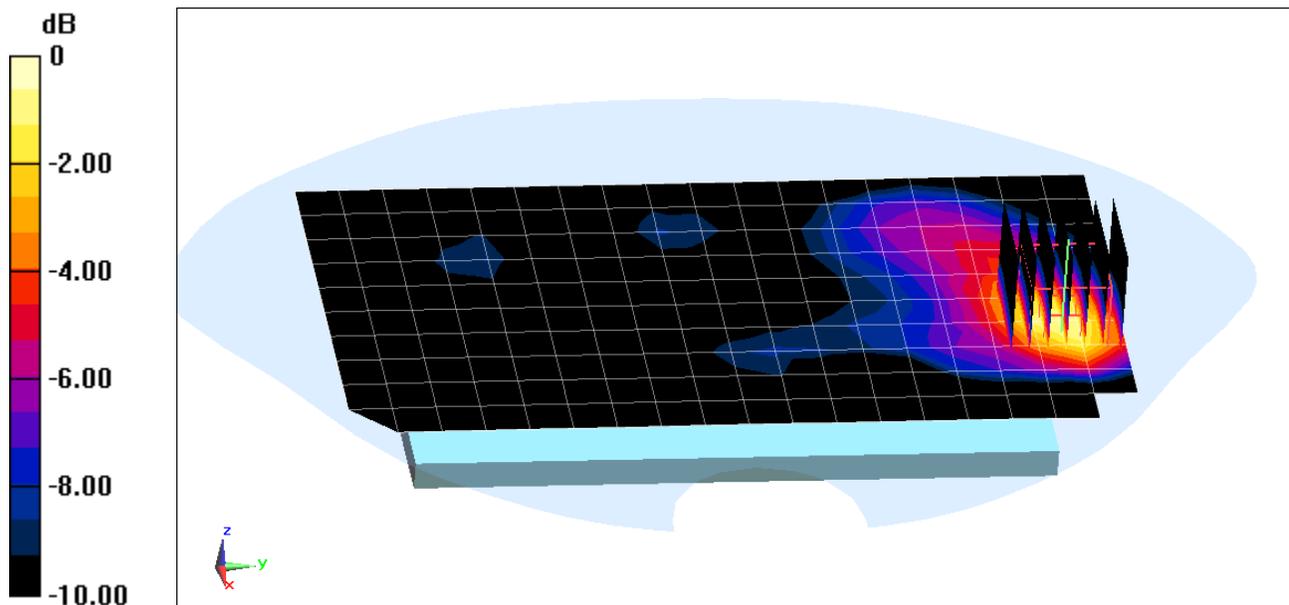

0 dB = 0.160 W/kg = -7.96 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 3039

Communication System: IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5765 MHz; Duty Cycle: 1:1
Medium: 5 GHz Body; Medium parameters used:

$$f = 5765 \text{ MHz}; \sigma = 6.177 \text{ S/m}; \epsilon_r = 46.255; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-06-2013; Ambient Temp: 23.7°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(3.66, 3.66, 3.66); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80);SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11a, 5.8 GHz, Body SAR, Ch 153, 6 Mbps, Back Side


Area Scan (13x22x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 4.627 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.583 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.039 W/kg (SAR corrected for target medium)

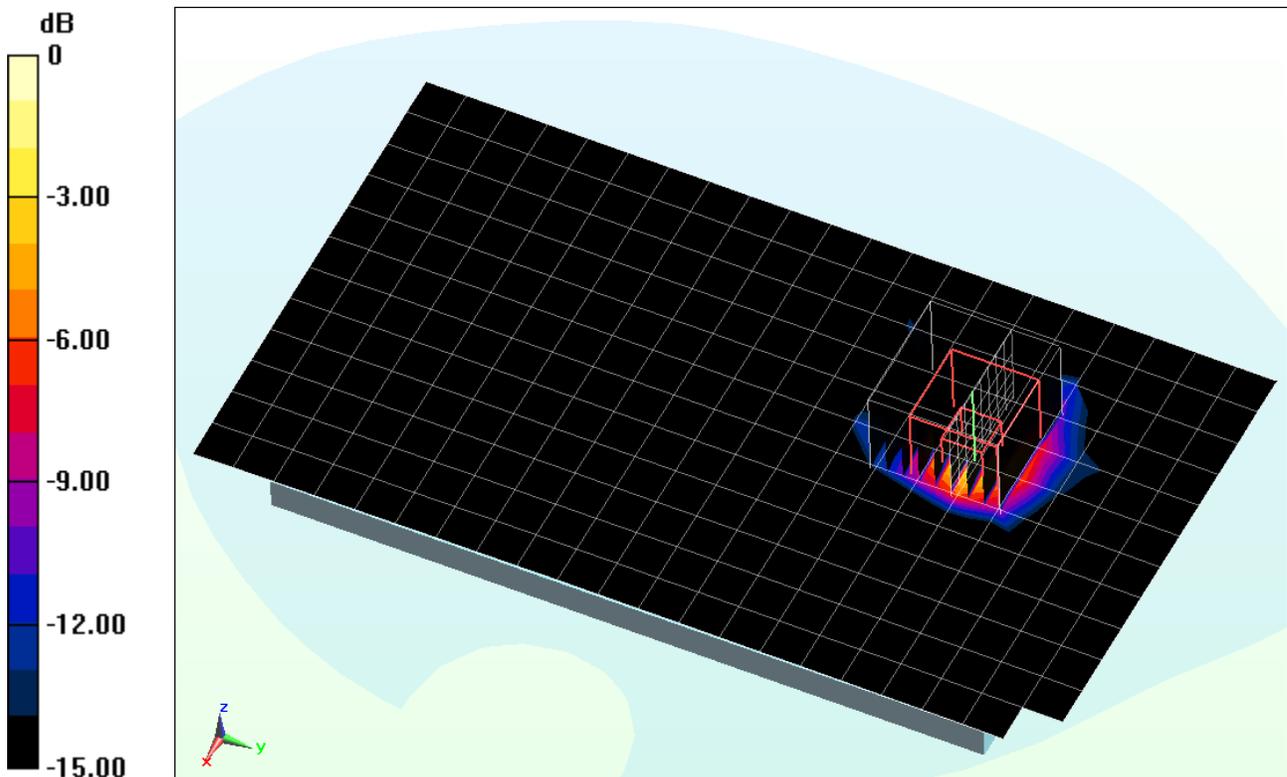

0 dB = 0.351 W/kg = -4.55 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 3039

Communication System: IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5660 MHz; Duty Cycle: 1:1
Medium: 5 GHz Body; Medium parameters used:

$$f = 5660 \text{ MHz}; \sigma = 6.007 \text{ S/m}; \epsilon_r = 46.397; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 05-06-2013; Ambient Temp: 23.7°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3589; ConvF(3.32, 3.32, 3.32); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80);SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11a, 5.5 - 5.7 GHz, Body SAR, Ch 132, 6 Mbps, Back Side


Area Scan (13x22x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (10x10x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 4.056 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.028 W/kg (SAR corrected for target medium)

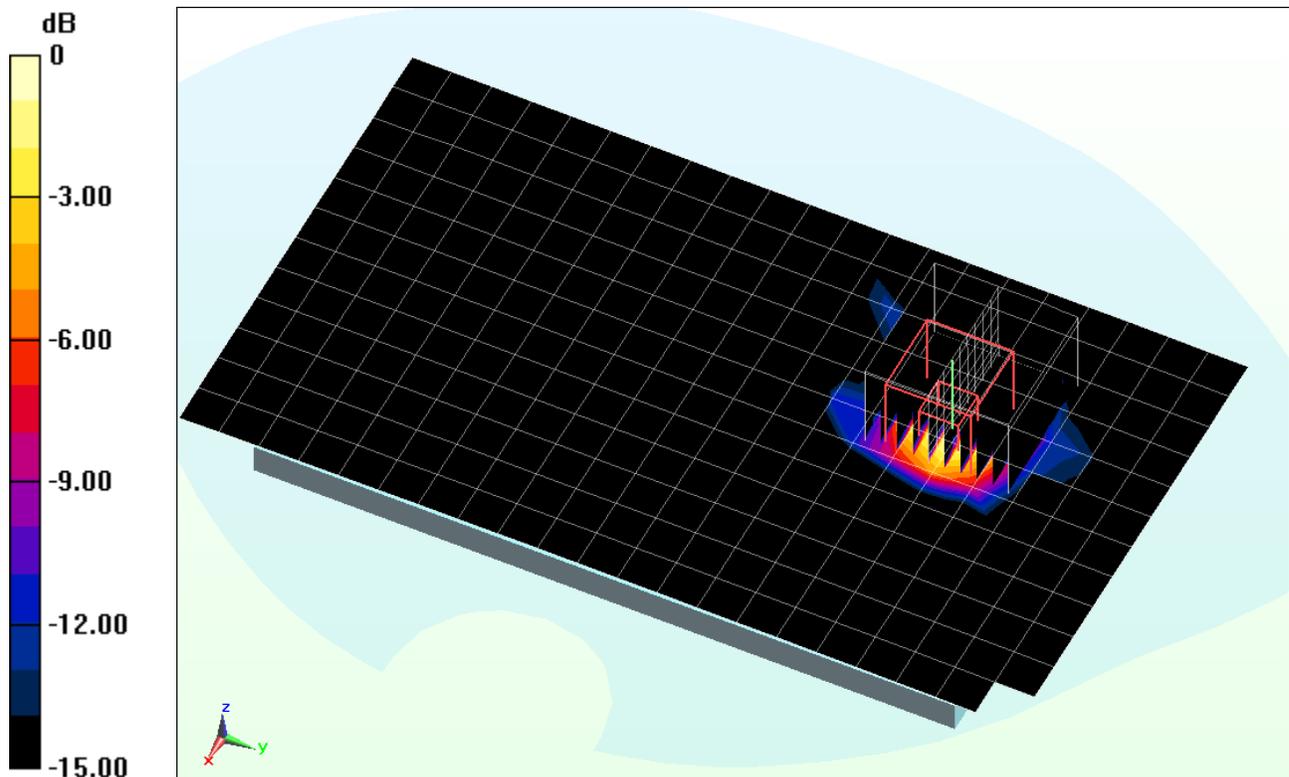

0 dB = 0.262 W/kg = -5.82 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE Band 2; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.564 \text{ S/m}$; $\epsilon_r = 53.045$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-11-2013; Ambient Temp: 23.1°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3287; ConvF(4.69, 4.69, 4.69); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 2 (PCS), Body SAR, Back side, High.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 50 RB Offset**


Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.166 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.956 W/kg; SAR(10 g) = 0.479 W/kg (SAR corrected for target medium)

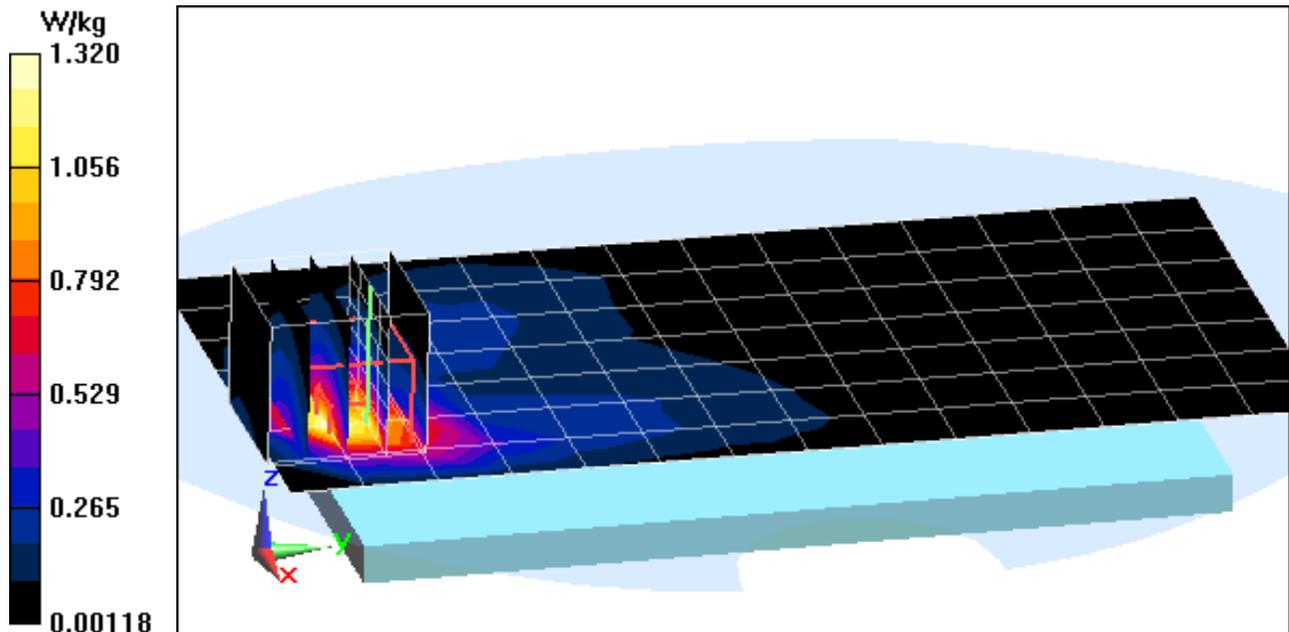

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5 \text{ MHz}$; $\sigma = 1.502 \text{ S/m}$; $\epsilon_r = 52.425$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-11-2013; Ambient Temp: 23.9°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN3920; ConvF(7.59, 7.59, 7.59); Calibrated: 2/27/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 4 (AWS), Body SAR, Back side, Mid.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (10x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.745 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.814 W/kg; SAR(10 g) = 0.437 W/kg (SAR corrected for target medium)

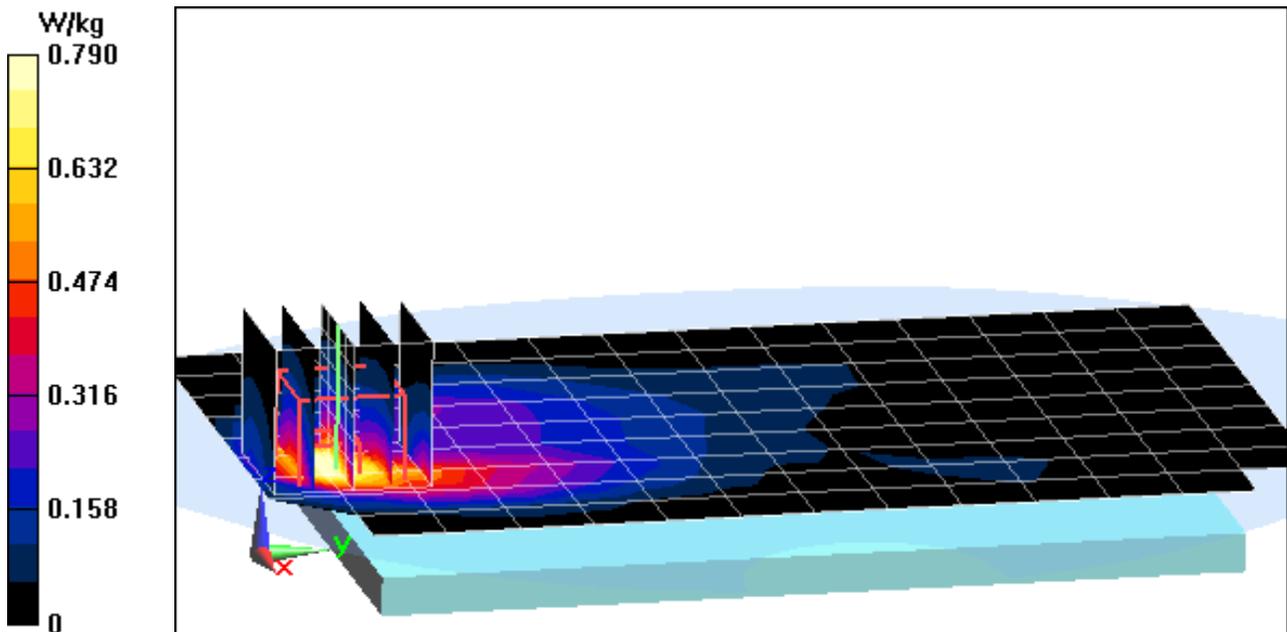

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$; $\sigma = 1.016 \text{ S/m}$; $\epsilon_r = 55.676$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-08-2013; Ambient Temp: 24.9°C; Tissue Temp: 23.5°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 49 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.871 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.821 W/kg

SAR(1 g) = 0.527 W/kg; SAR(10 g) = 0.341 W/kg (SAR corrected for target medium)

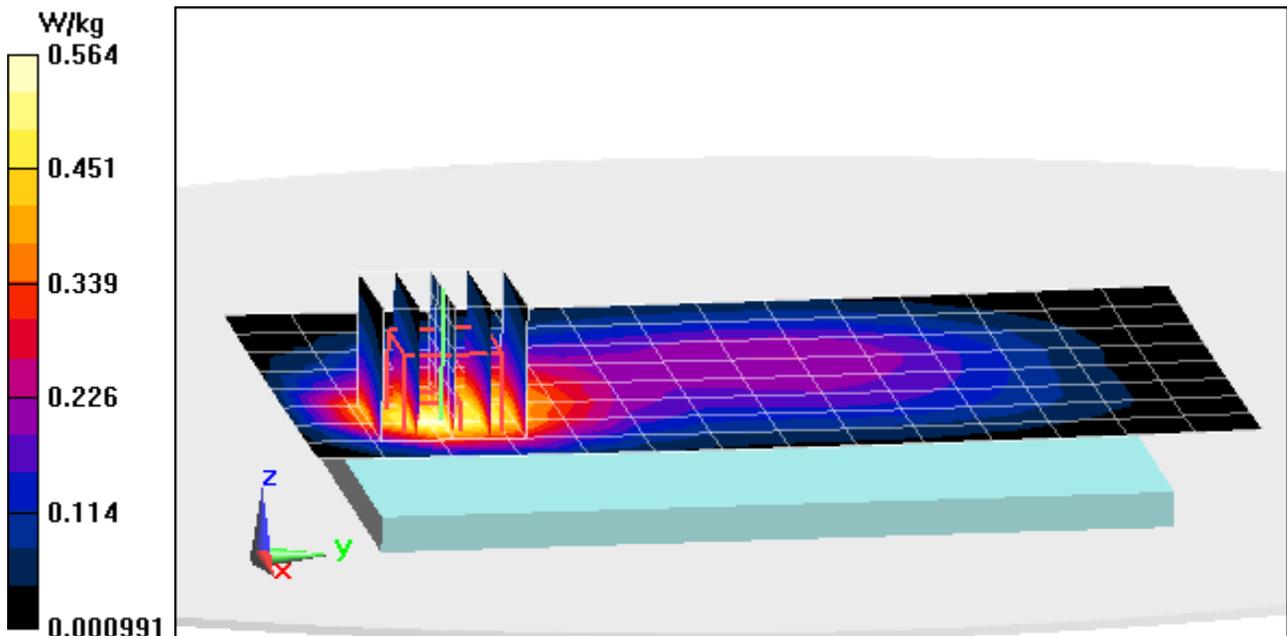

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used:

$$f = 710 \text{ MHz}; \sigma = 0.928 \text{ S/m}; \epsilon_r = 55.352; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-14-2013; Ambient Temp: 24.5°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3209; ConvF(6.38, 6.38, 6.38); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 17, Body SAR, Back side, Mid.ch, 10 MHz Bandwidth,
QPSK, 1 RB, 0 RB Offset**


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.986 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.100 W/kg (SAR corrected for target medium)

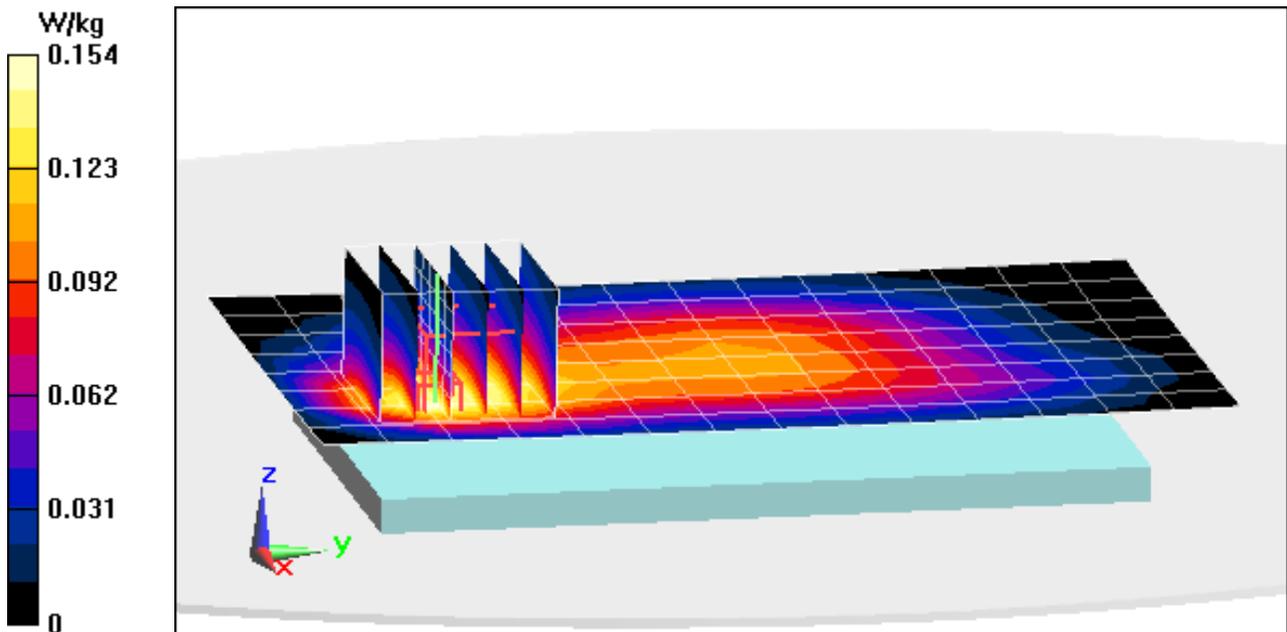

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8620

Communication System: LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: 2600 Body Medium parameters used (interpolated):

$$f = 2535 \text{ MHz}; \sigma = 2.15 \text{ S/m}; \epsilon_r = 52.318; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-22-2013; Ambient Temp: 23.0°C; Tissue Temp: 22.6°C

Probe: ES3DV2 - SN3022; ConvF(3.8, 3.8, 3.8); Calibrated: 8/28/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 7, Body SAR, Back side, Mid.ch, 20 MHz Bandwidth,
QPSK, 1 RB, 99 RB Offset**


Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.271 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.758 W/kg; SAR(10 g) = 0.323 W/kg (SAR corrected for target medium)

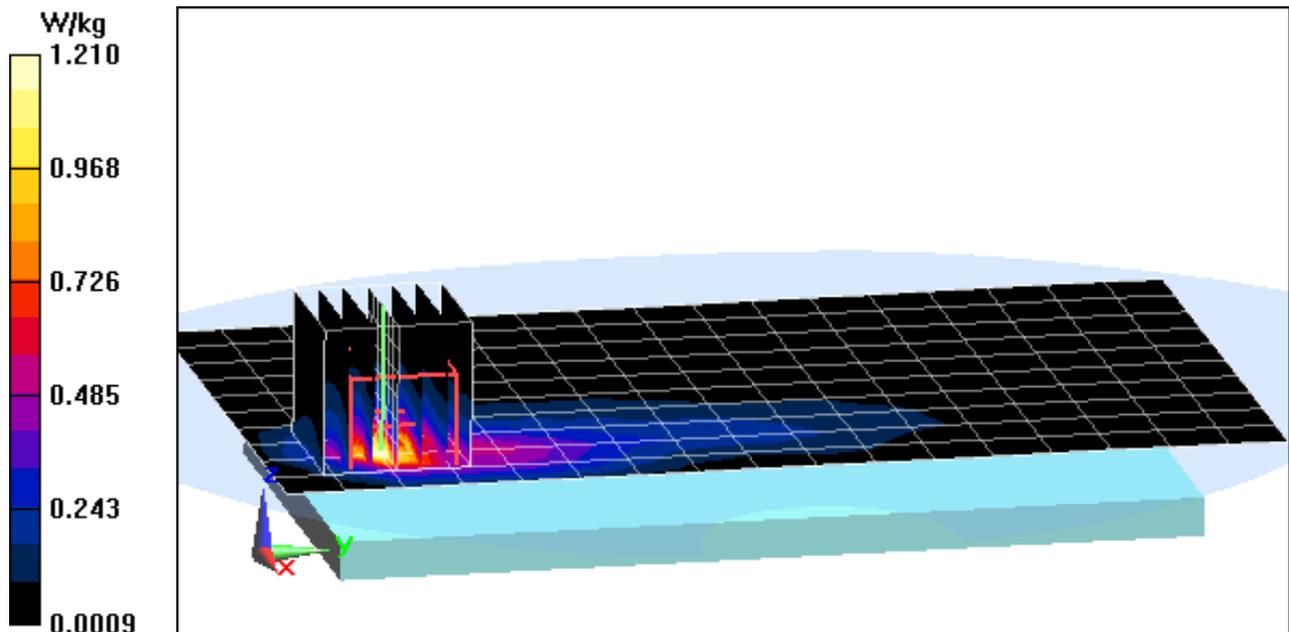

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 6717

Communication System: IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$; $\sigma = 2.027 \text{ S/m}$; $\epsilon_r = 50.263$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-18-2013; Ambient Temp: 22.9°C; Tissue Temp: 22.7°C

Probe: ES3DV2 - SN3022; ConvF(3.97, 3.97, 3.97); Calibrated: 8/28/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11b, Body SAR, Ch 06, 1 Mbps, Front Side


Area Scan (12x19x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.218 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.119 W/kg (SAR corrected for target medium)

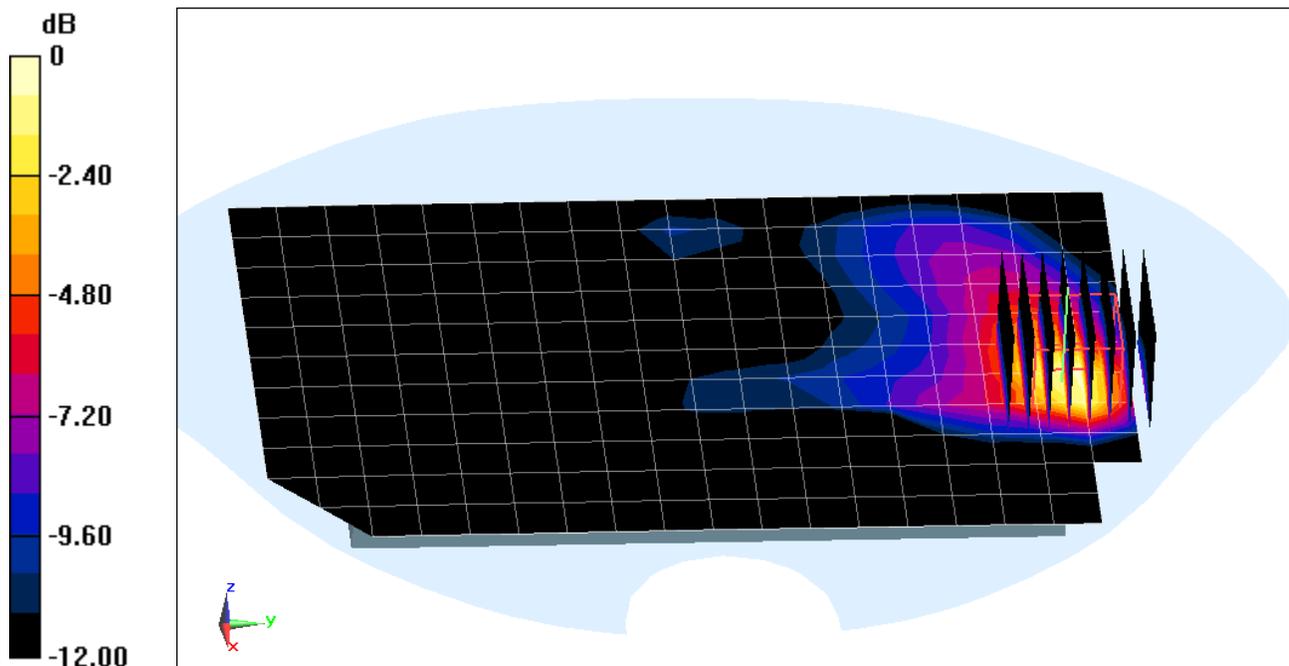

0 dB = 0.338 W/kg = -4.71 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8624

Communication System: GSM GPRS; 4 Tx slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.076

Medium: 1900 Body Medium parameters used:

$f = 1910$ MHz; $\sigma = 1.539$ S/m; $\epsilon_r = 53.147$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.3 cm

Test Date: 08-01-2013; Ambient Temp: 23.6°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN3920; ConvF(7.38, 7.38, 7.38); Calibrated: 2/27/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7);SEMCAD X Version 14.6.10 (7164)

Mode: GPRS 1900, Hand SAR, Back side, High.ch, 4 Tx Slots


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.998 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 10.7 W/kg

SAR(1 g) = 5.11 W/kg; SAR(10 g) = 2.25 W/kg (SAR corrected for target medium)

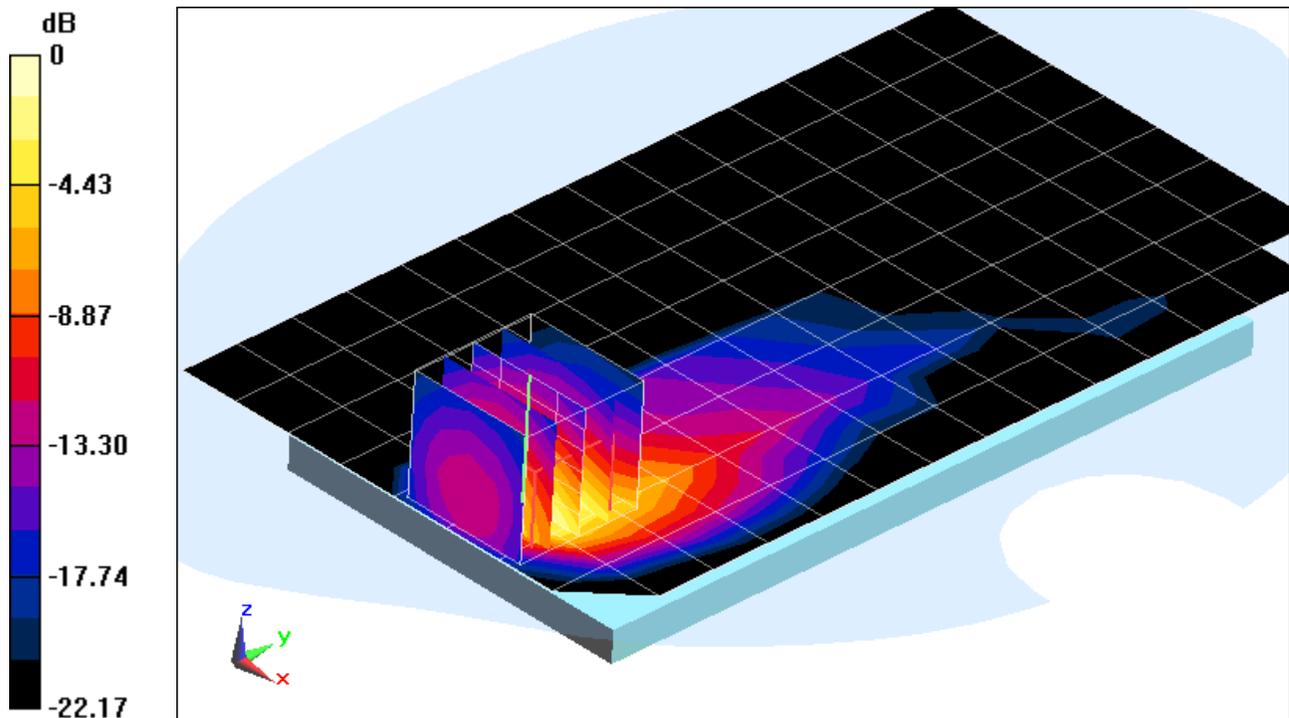

0 dB = 6.00 W/kg = 7.78 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8624

Communication System: WCDMA 1900; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1907.6 \text{ MHz}$; $\sigma = 1.585 \text{ S/m}$; $\epsilon_r = 50.723$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.3 cm

Test Date: 08-05-2013; Ambient Temp: 23.3°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3287; ConvF(4.69, 4.69, 4.69); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM with CRP; Type: SAM 5.0; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: UMTS 1900, Hand SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 78.613 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 7.79 W/kg; SAR(10 g) = 3.17 W/kg(SAR corrected for target medium)

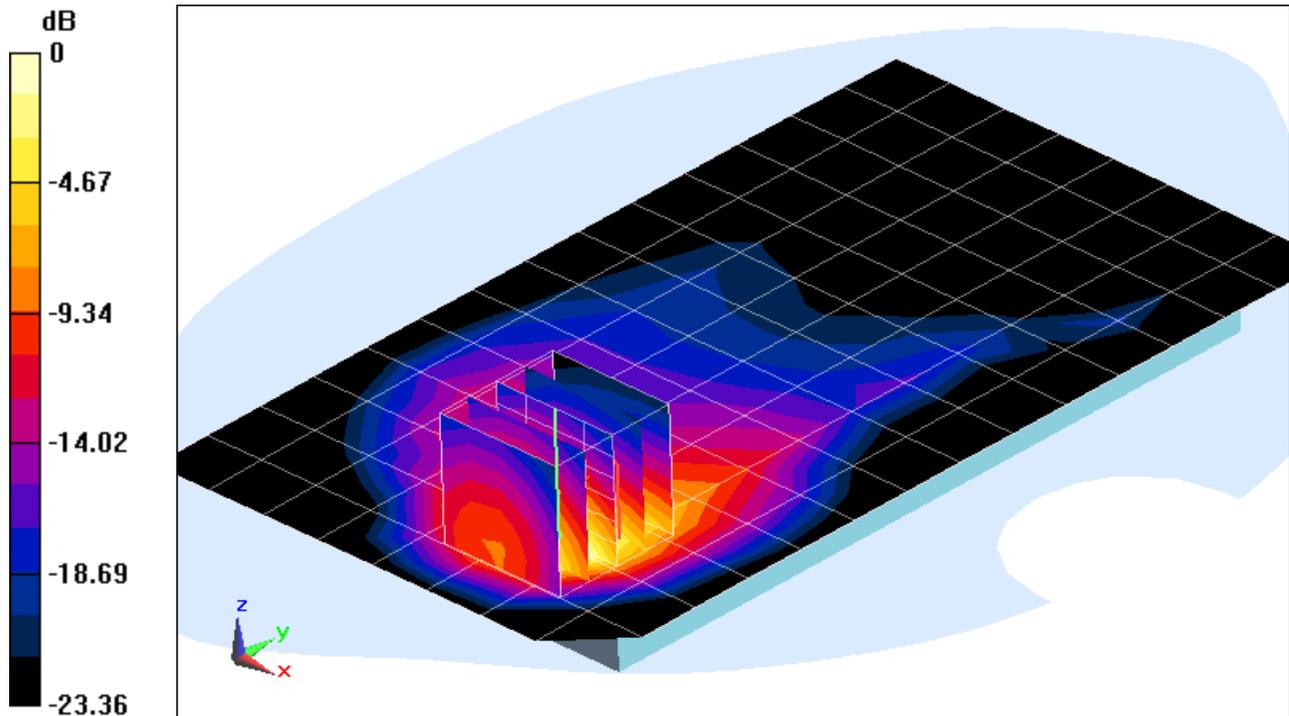

0 dB = 9.19 W/kg = 9.63 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8624

Communication System: AWS UMTS, Frequency: 1752.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1752.5 \text{ MHz}$; $\sigma = 1.516 \text{ S/m}$; $\epsilon_r = 51.05$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.3 cm

Test Date: 08-01-2013; Ambient Temp: 23.2°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3287; ConvF(4.86, 4.86, 4.86); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: AWS UMTS, Hand SAR, Back side, High.ch


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 73.137 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 15.6 W/kg

SAR(1 g) = 7.26 W/kg; SAR(10 g) = 3.28 W/kg (SAR corrected for target medium)

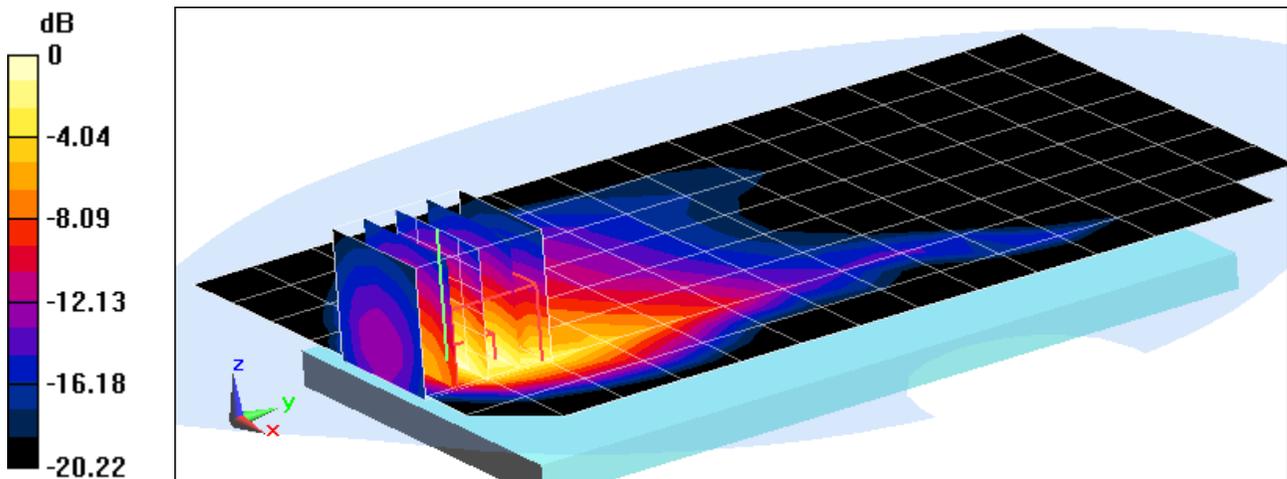

0 dB = 7.84 W/kg = 8.94 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8694

Communication System: LTE Band 2 (PCS); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.527 \text{ S/m}$; $\epsilon_r = 53.185$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.3 cm

Test Date: 08-01-2013; Ambient Temp: 23.6°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN3920; ConvF(7.38, 7.38, 7.38); Calibrated: 2/27/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: LTE Band 2 (PCS), Hand SAR, Back side, High.ch, 20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 62.348 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 10.5 W/kg

SAR(1 g) = 5.05 W/kg; SAR(10 g) = 2.22 W/kg (SAR corrected for target medium)

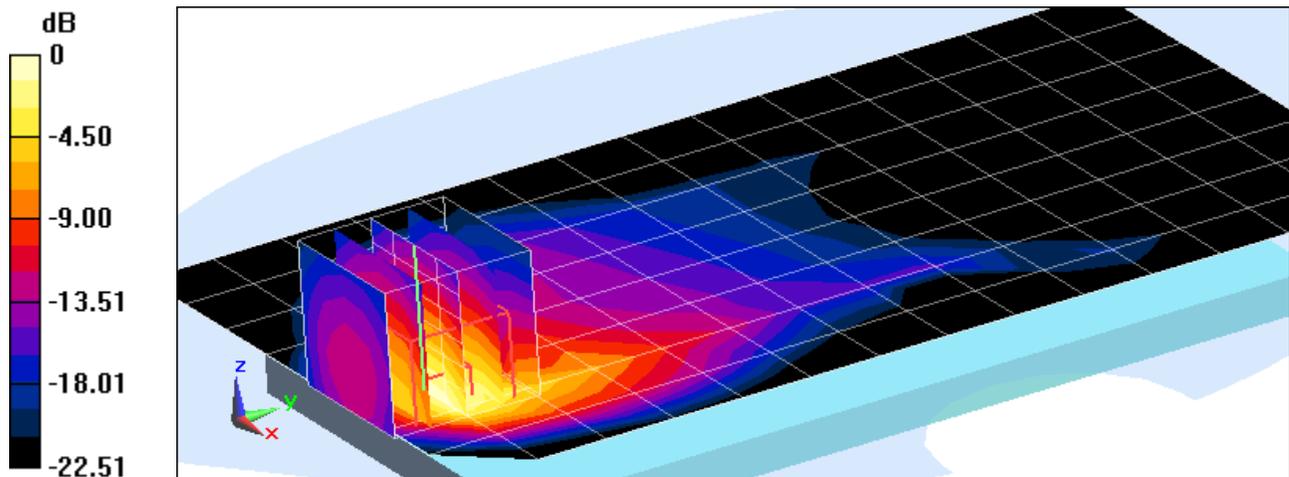

0 dB = 5.90 W/kg = 7.71 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8694

Communication System: LTE Band 4 (AWS); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.5$ MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 52.589$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 0.3 cm

Test Date: 07-18-2013; Ambient Temp: 24.4°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3288; ConvF(5.18, 5.18, 5.18); Calibrated: 9/20/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Mode: LTE Band 4 (AWS), Hand SAR, Back side, Mid.ch, 20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset


Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 73.483 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 6.1 W/kg; SAR(10 g) = 2.86 W/kg (SAR corrected for target medium)

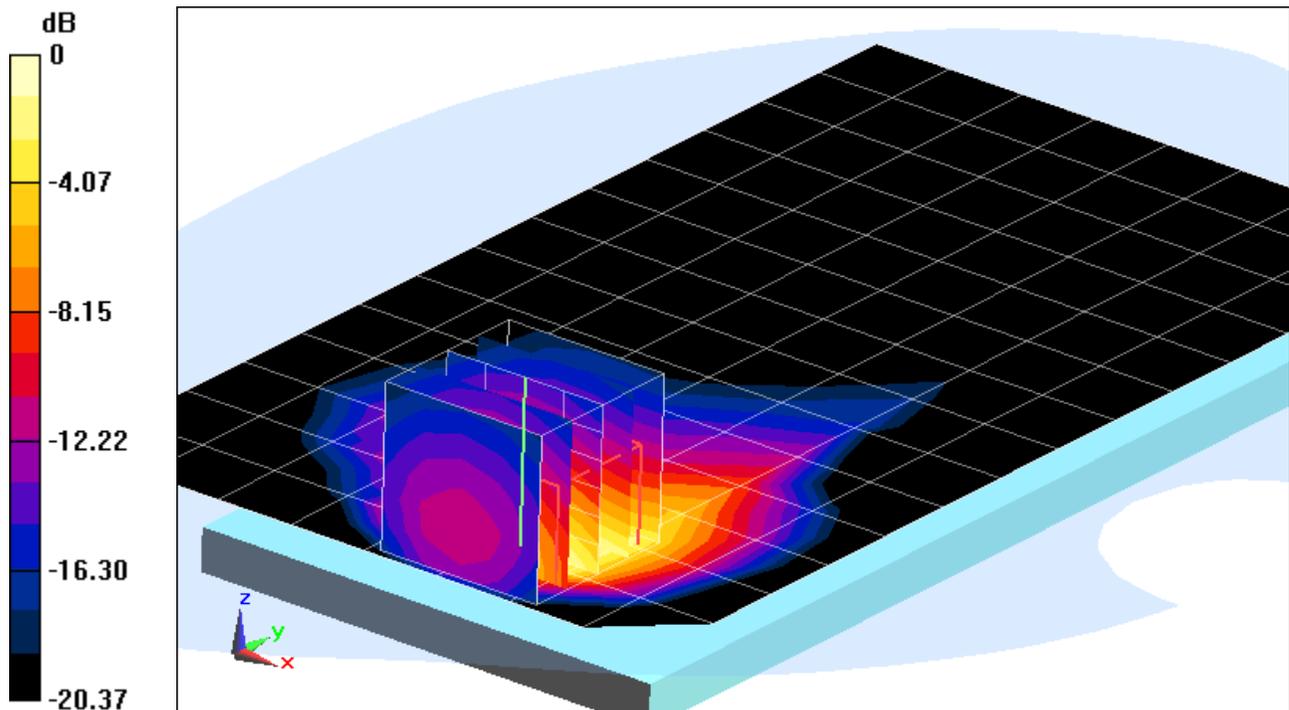

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 8925

Communication System: LTE BAND 7; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: 2600 Body; Medium parameters used (interpolated):

$f = 2560 \text{ MHz}$; $\sigma = 2.09 \text{ S/m}$; $\epsilon_r = 50.696$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.3 cm

Test Date: 08-02-2013; Ambient Temp: 23.3°C; Tissue Temp: 23.2°C

Probe: ES3DV2 - SN3022; ConvF(3.8, 3.8, 3.8); Calibrated: 8/28/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

**Mode: LTE Band 7, Hand SAR, Back side, High.ch,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**


Area Scan (14x17x1): Measurement grid: dx=12mm, dy=12mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.696 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 24.4 W/kg

SAR(1 g) = 7.48 W/kg; SAR(10 g) = 3.02 W/kg (SAR corrected for target medium)

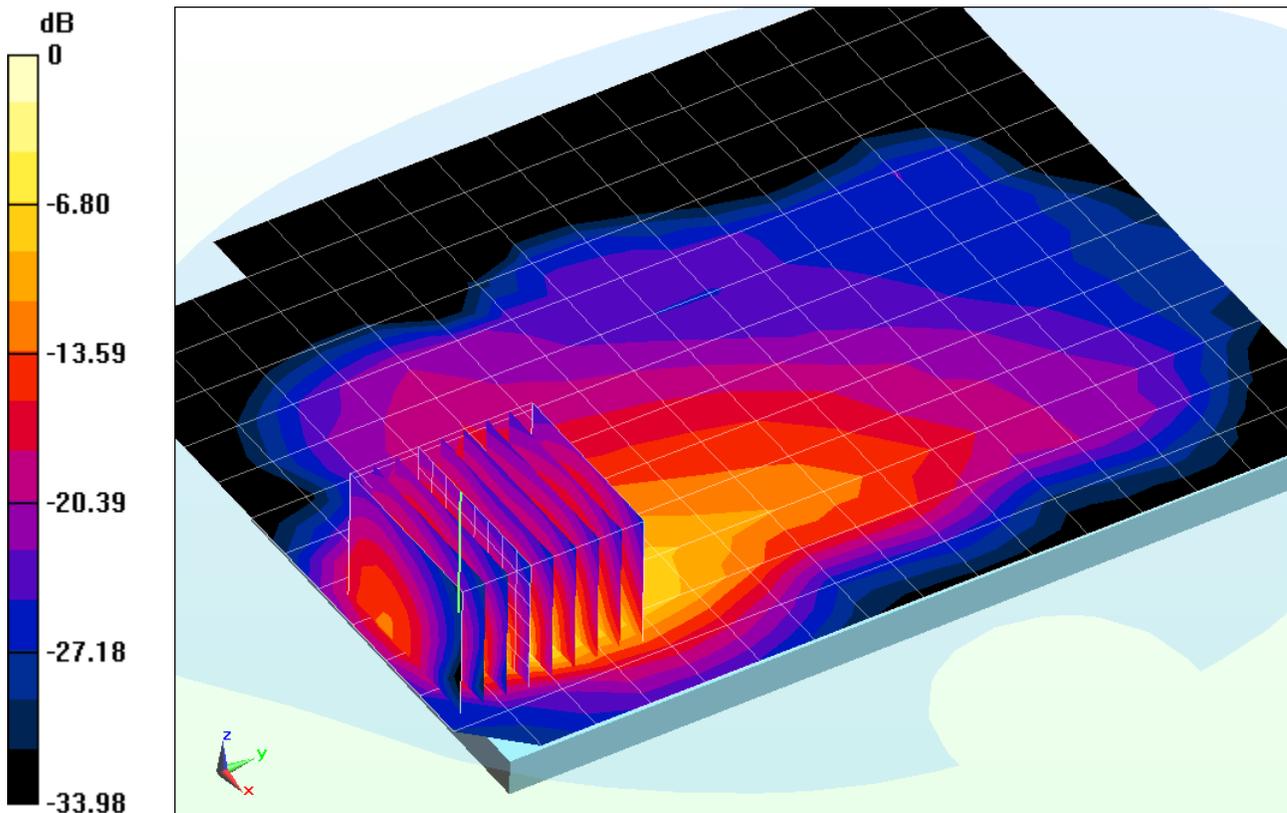

0 dB = 11.1 W/kg = 10.45 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 3039

Communication System: IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$$f = 5805 \text{ MHz}; \sigma = 6.202 \text{ S/m}; \epsilon_r = 46.123; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 0.3 cm

Test Date: 05-06-2013; Ambient Temp: 23.7°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(3.66, 3.66, 3.66); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11a, 5.8 GHz, Hand SAR, Ch 161, 6 Mbps, Back Side


Area Scan (14x23x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio=1.4

Reference Value = 21.377 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 1.65 W/kg; SAR(10 g) = 0.363 W/kg (SAR corrected for target medium)

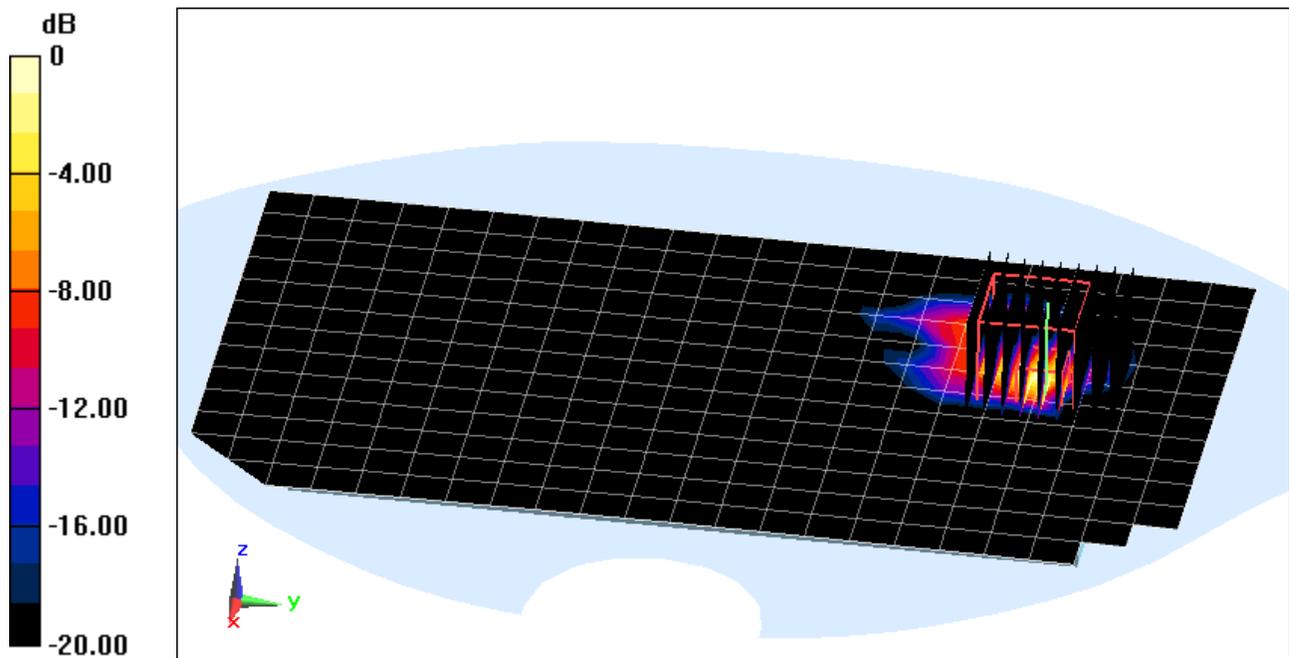

PCTEST ENGINEERING LABORATORY, INC.

DUT: PY7PM-0430; Type: Portable Handset; Serial: 3039

Communication System: IEEE 802.11a 5.2-5.8 GHz Band; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$$f = 5320 \text{ MHz}; \sigma = 5.57 \text{ S/m}; \epsilon_r = 46.975; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 0.3 cm

Test Date: 05-06-2013; Ambient Temp: 23.6°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(3.81, 3.81, 3.81); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

Mode: IEEE 802.11a, 5.3 GHz, Hand SAR, Ch 64, 6 Mbps, Back Side


Area Scan (14x23x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio=1.4

Reference Value = 21.659 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 11.4 W/kg

SAR(1 g) = 2.21 W/kg; SAR(10 g) = 0.604 W/kg (SAR corrected for target medium)

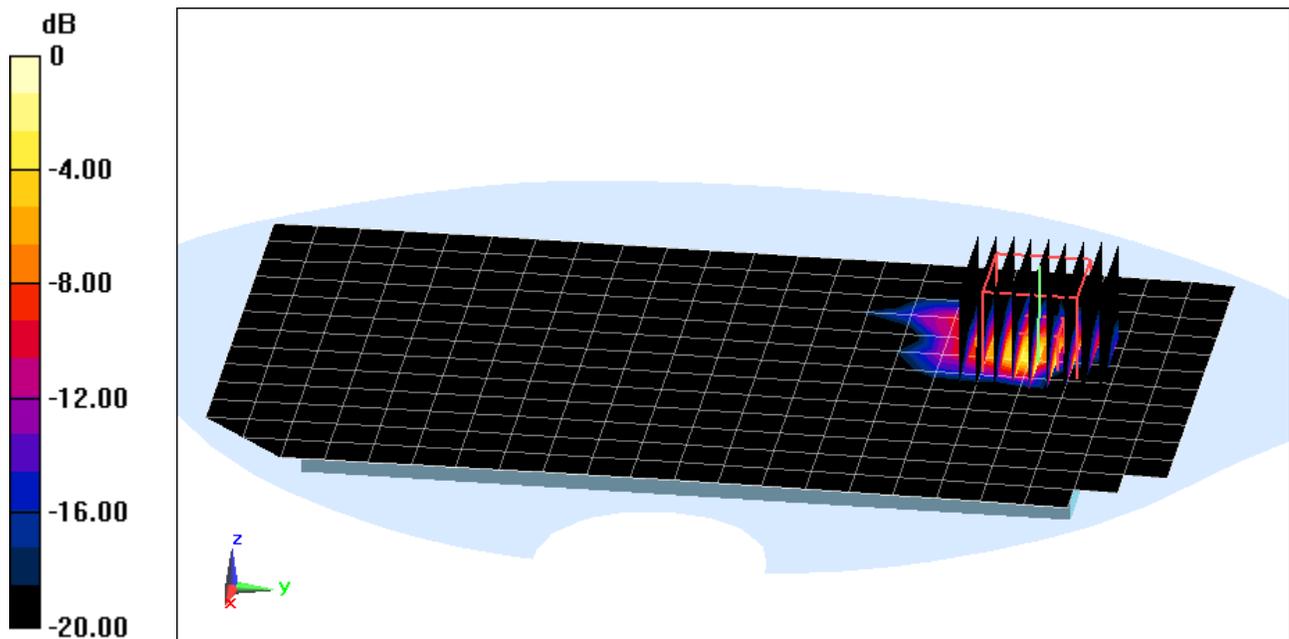

0 dB = 6.13 W/kg = 7.87 dBW/kg

APPENDIX B: SYSTEM VERIFICATION

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1054

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 740 Head Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 40.744$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Space: 1.5 cm

Test Date: 07-17-2013; Ambient Temp: 21.0°C; Tissue Temp: 21.6°C

Probe: ES3DV2 - SN3022; ConvF(6.3, 6.3, 6.3); Calibrated: 8/28/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1406

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

750MHz System Verification

Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.807 W/kg; SAR(10 g) = 0.532 W/kg (SAR corrected for target medium)

Deviation (1 g) = -5.06%

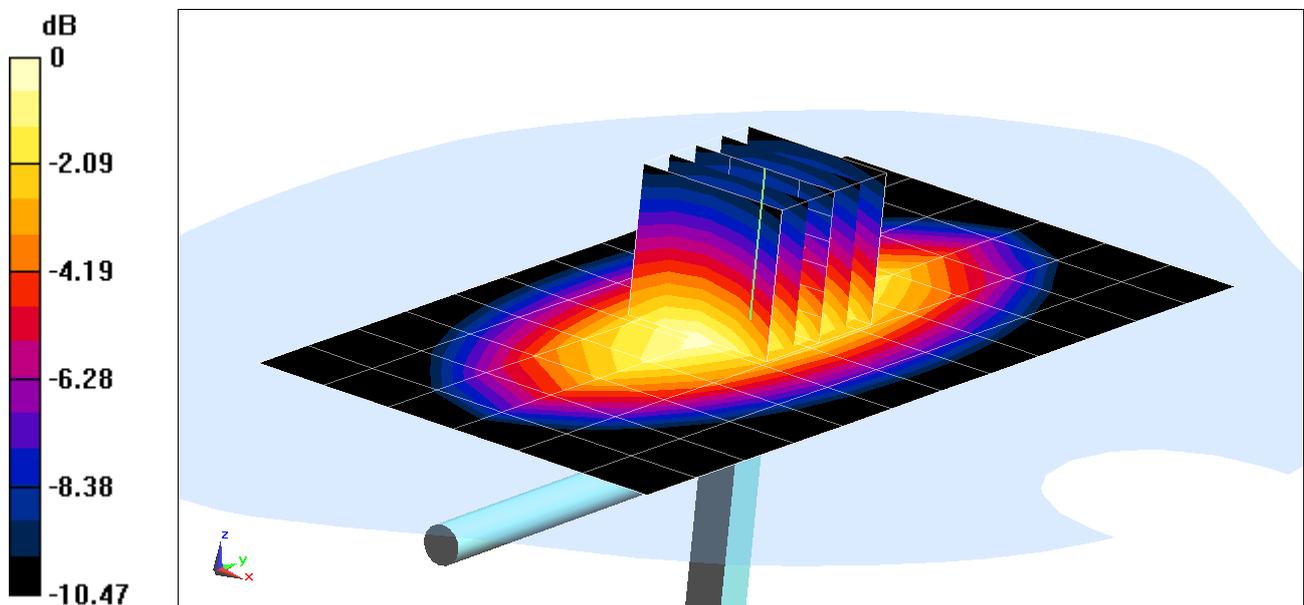

0 dB = 0.874 W/kg = -0.58 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.907 \text{ S/m}$; $\epsilon_r = 40.598$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-10-2013; Ambient Temp: 24.2°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3288; ConvF(6.41, 6.41, 6.41); Calibrated: 9/20/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.960 W/kg; SAR(10 g) = 0.626 W/kg (SAR corrected for target medium)

Deviation (1 g) = -0.62 %

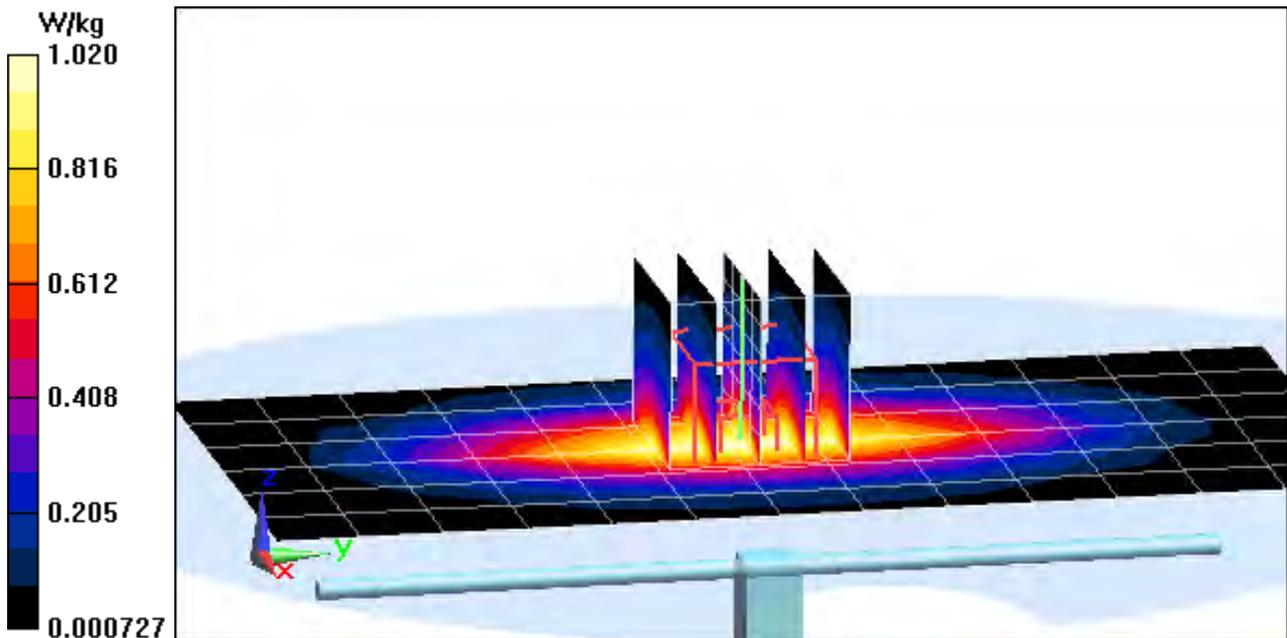

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 835 MHz; Type: D835V2; Serial: 4d026

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.936 \text{ S/m}$; $\epsilon_r = 41.226$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-25-2013; Ambient Temp: 23.4°C; Tissue Temp: 23.4°C

Probe: ES3DV3 - SN3288; ConvF(6.41, 6.41, 6.41); Calibrated: 9/20/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.996 W/kg; SAR(10 g) = 0.650 W/kg (SAR corrected for target medium)

Deviation (1 g) = 6.07 %

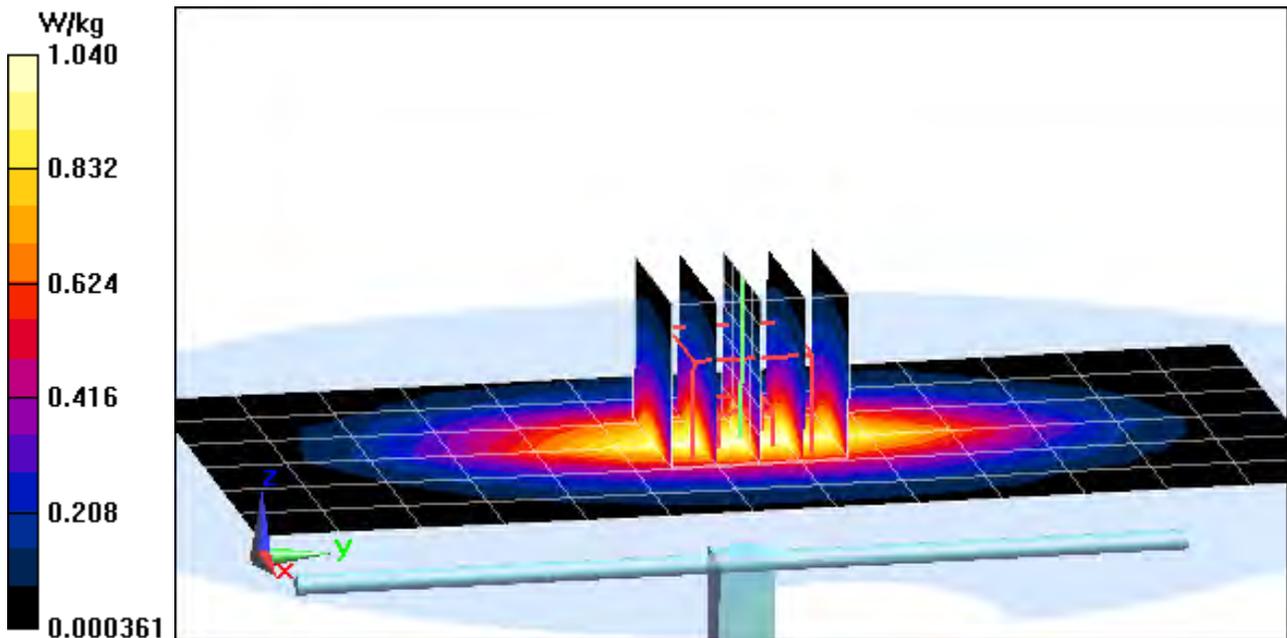

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.408 \text{ S/m}$; $\epsilon_r = 39.38$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-25-2013; Ambient Temp: 23.3°C; Tissue Temp: 22.4°C

Probe: ES3DV3 - SN3287; ConvF(5.16, 5.16, 5.16); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM with CRP; Type: SAM 4.0; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

1750 MHz System Verification

Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 6.99 W/kg

SAR(1 g) = 3.77 W/kg; SAR(10 g) = 1.96 W/kg (SAR corrected for target medium)

Deviation (1 g) = 2.45 %

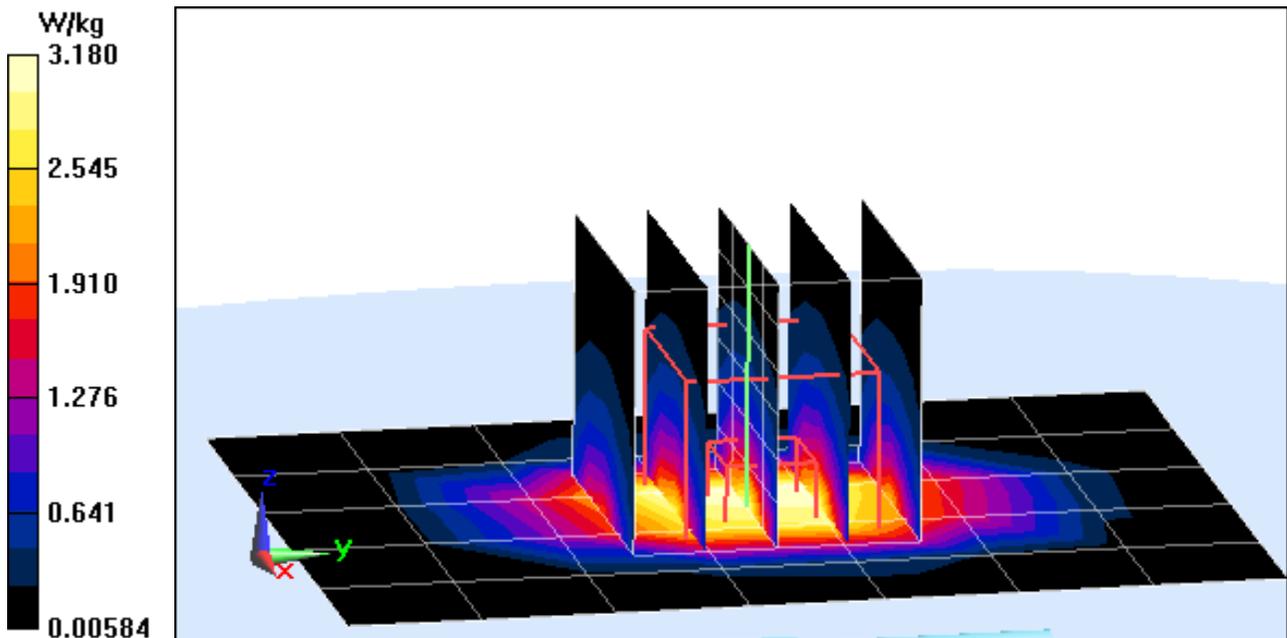

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.387 \text{ S/m}$; $\epsilon_r = 39.918$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-15-2013; Ambient Temp: 22.1°C; Tissue Temp: 22.5°C

Probe: ES3DV2 - SN3022; ConvF(4.86, 4.86, 4.86); Calibrated: 8/28/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.8 (7164)

1900MHz System Verification

Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.20 W/kg

SAR(1 g) = 3.97 W/kg; SAR(10 g) = 2.07 W/kg (SAR corrected for target medium)

Deviation (1 g) = 0.76 %

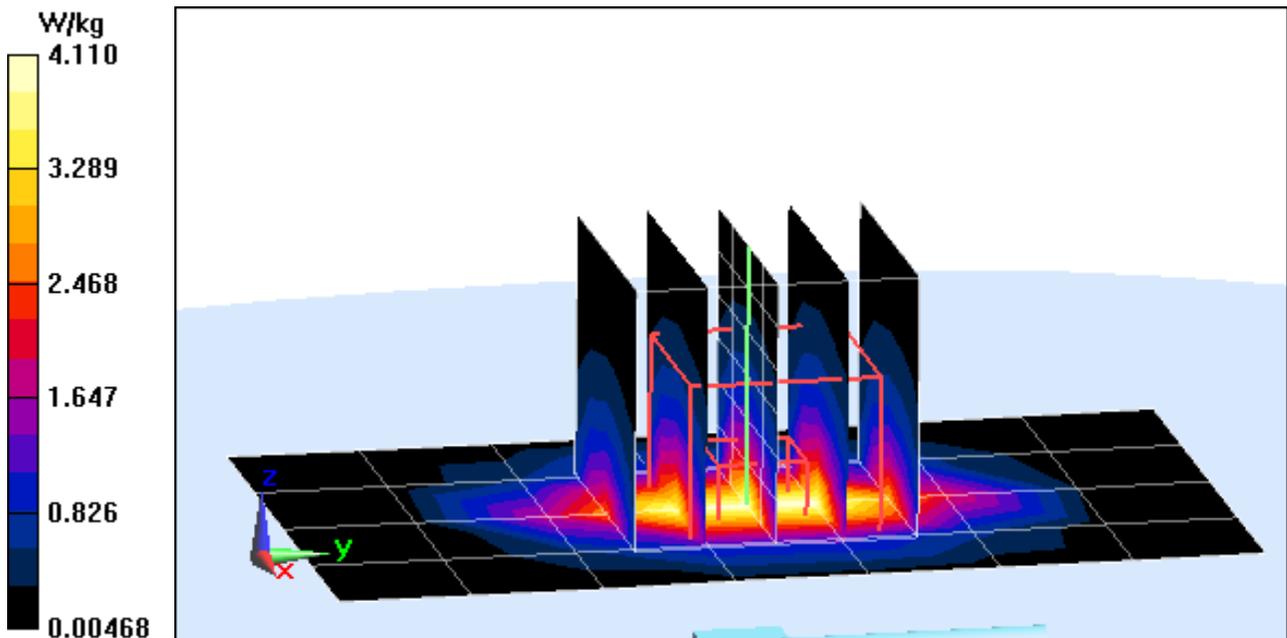

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.418 \text{ S/m}$; $\epsilon_r = 40.144$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-17-2013; Ambient Temp: 23.9°C; Tissue Temp: 22.0°C

Probe: ES3DV3 - SN3209; ConvF(5.21, 5.21, 5.21); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: SAM Right; Type: QD000P40CD; Serial: 1686

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.02 W/kg

SAR(1 g) = 3.83 W/kg; SAR(10 g) = 2 W/kg (SAR corrected for target medium)

Deviation (1 g) = -3.53 %

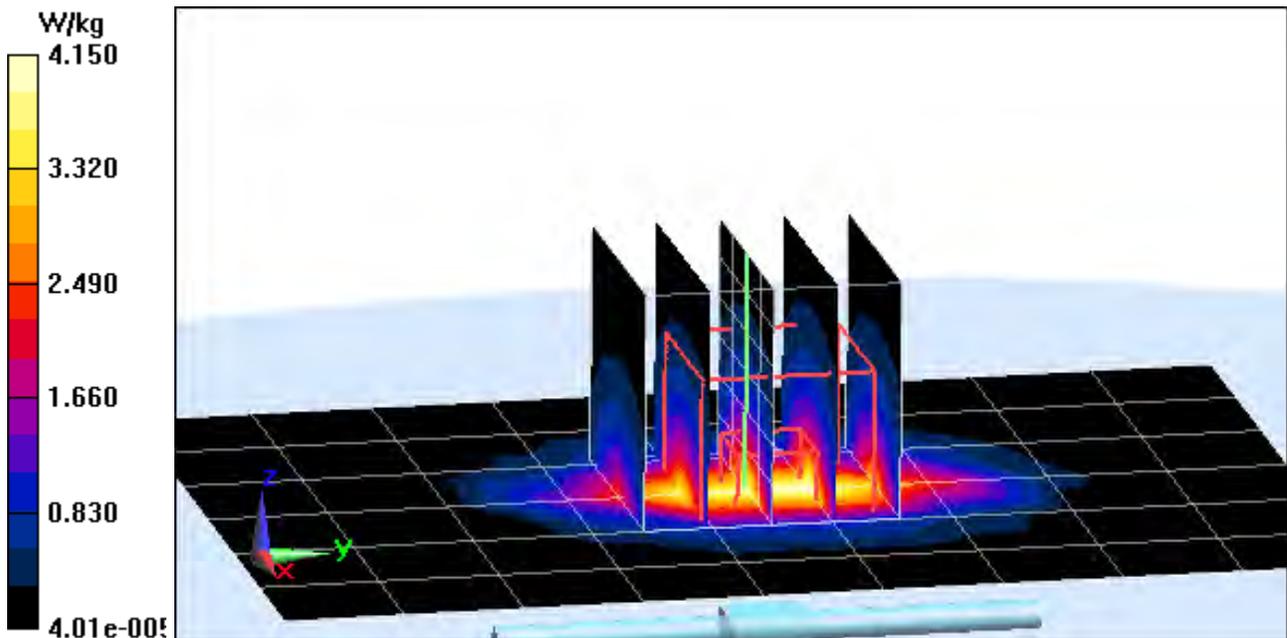

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.878 \text{ S/m}$; $\epsilon_r = 39.996$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 06-18-2013; Ambient Temp: 23.4°C; Tissue Temp: 22.9°C

Probe: ES3DV3 - SN3287; ConvF(4.3, 4.3, 4.3); Calibrated: 11/15/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

2450 MHz System Verification

Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 11.3 W/kg

SAR(1 g) = 5.34 W/kg; SAR(10 g) = 2.44 W/kg (SAR corrected for target medium)

Deviation (1 g) = 1.33 %

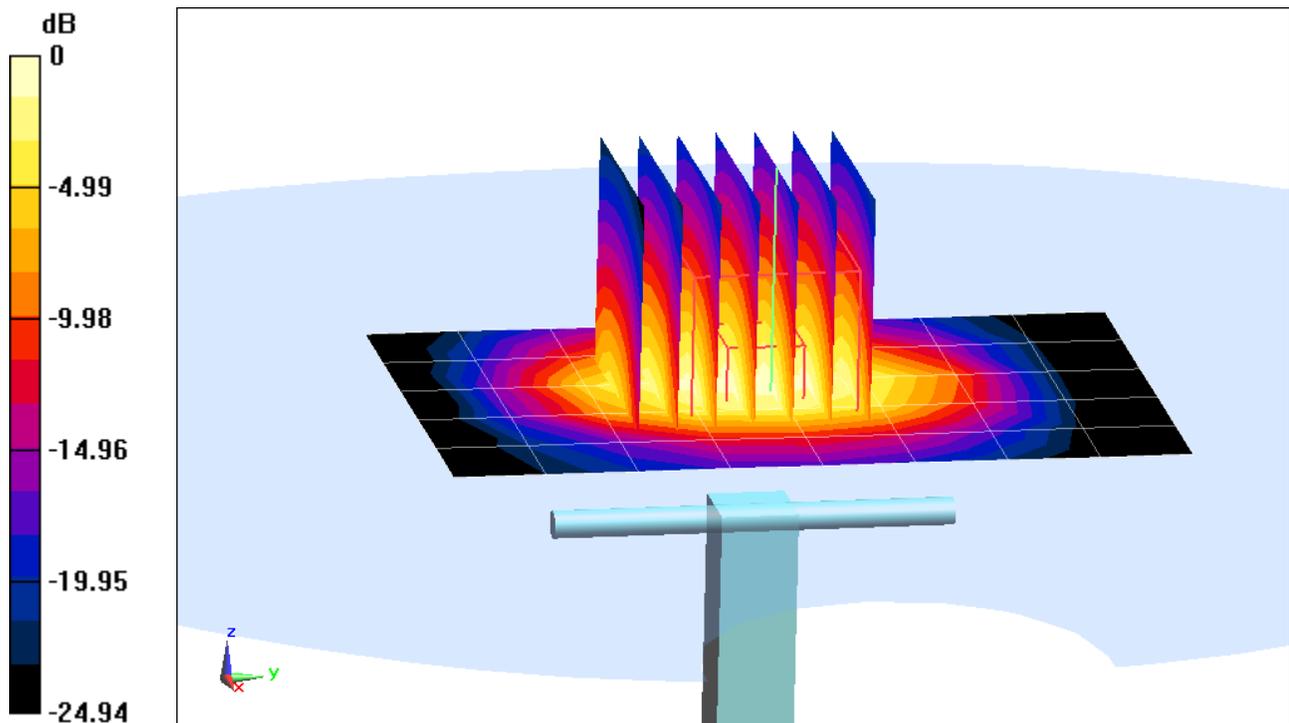

0 dB = 6.80 W/kg = 8.33 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 1.846 \text{ S/m}$; $\epsilon_r = 38.495$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 07-18-2013; Ambient Temp: 23.0°C ; Tissue Temp: 23.5°C

Probe: ES3DV2 - SN3022; ConvF(4.23, 4.23, 4.23); Calibrated: 8/28/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

2450MHz System Verification

Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 5.62 W/kg; SAR(10 g) = 2.59 W/kg (SAR corrected for target medium)

Deviation (1 g) = 6.64%

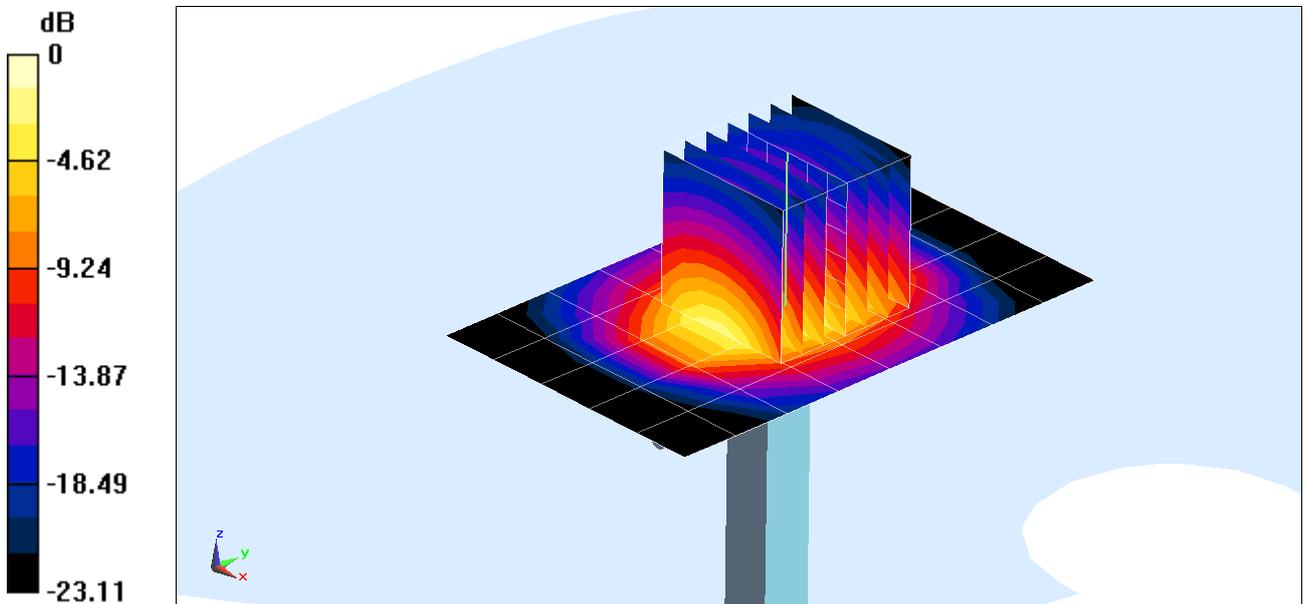

0 dB = 7.31 W/kg = 8.64 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 2600 MHz; Type: D2600V2; Serial: 1004

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Head Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 2.018 \text{ S/m}$; $\epsilon_r = 37.879$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section Space: 1.0 cm

Test Date: 07-18-2013; Ambient Temp: 23.0°C; Tissue Temp: 23.5°C

Probe: ES3DV2 - SN3022; ConvF(4.1, 4.1, 4.1); Calibrated: 8/28/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

2600MHz System Verification

Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 14.3 W/kg

SAR(1 g) = 6.22 W/kg; SAR(10 g) = 2.74 W/kg (SAR corrected for target medium)

Deviation (1 g) = 6.87 %

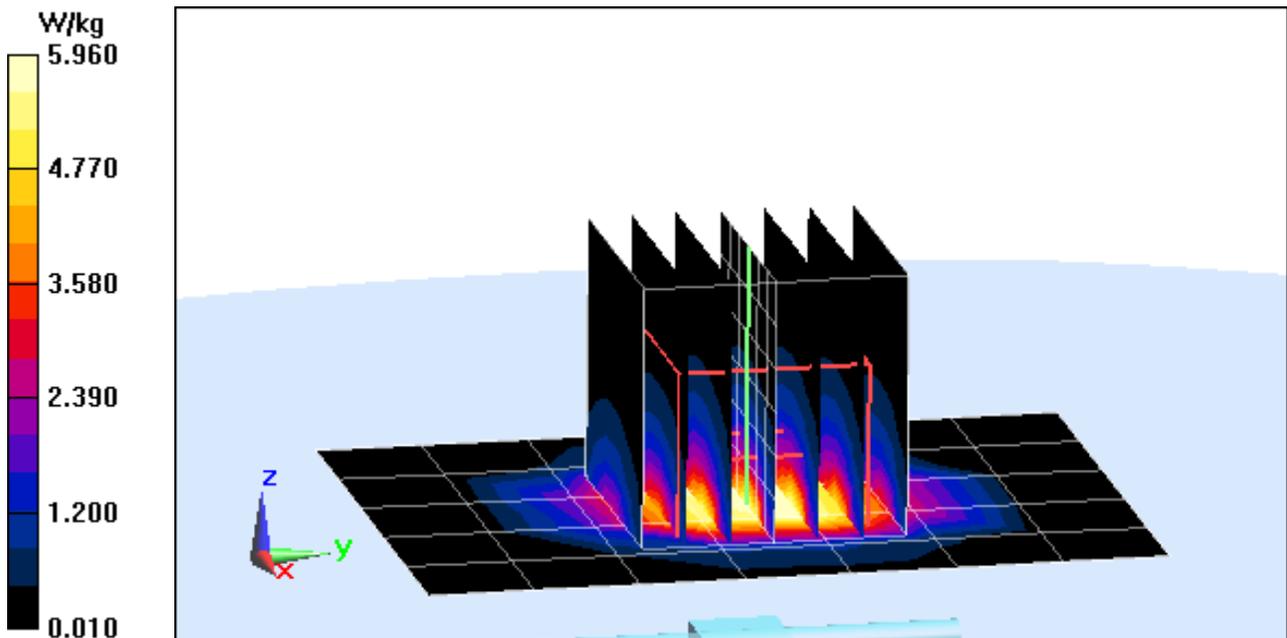

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1120

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used:

$f = 5200 \text{ MHz}$; $\sigma = 4.489 \text{ S/m}$; $\epsilon_r = 37.242$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-09-2013; Ambient Temp: 24.4°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN3920; ConvF(4.87, 4.87, 4.87); Calibrated: 2/27/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

5200 MHz System Verification

Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 26.9 W/kg

SAR(1 g) = 6.88 W/kg; SAR(10 g) = 2.02 W/kg (SAR corrected for target medium)

Deviation (1 g) = -9.47%

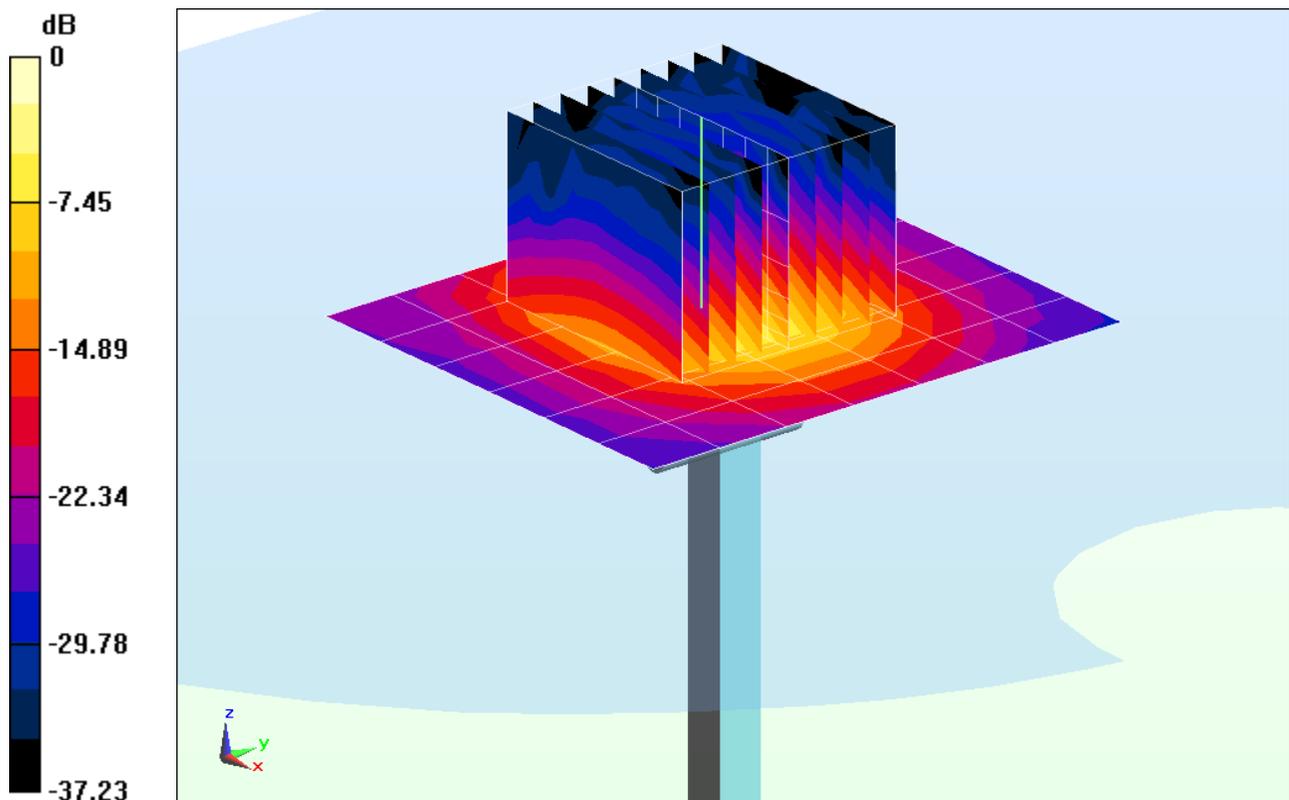

0 dB = 16.9 W/kg = 12.28 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1120

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 4.565 \text{ S/m}$; $\epsilon_r = 37.13$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-09-2013; Ambient Temp: 24.5°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN3920; ConvF(4.73, 4.73, 4.73); Calibrated: 2/27/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

5300 MHz System Verification

Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 33.3 W/kg

SAR(1 g) = 8.37 W/kg; SAR(10 g) = 2.4 W/kg (SAR corrected for target medium)

Deviation (1 g) = 6.35%

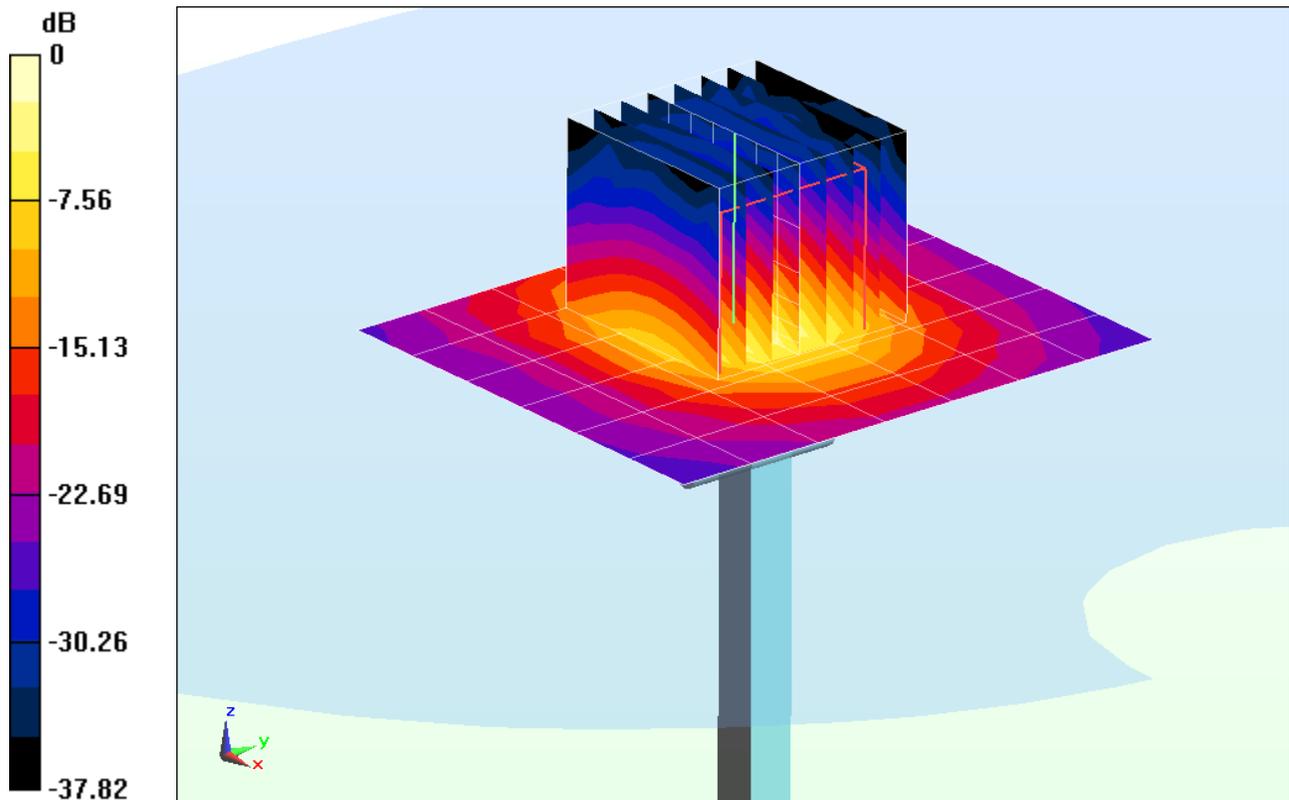

0 dB = 20.8 W/kg = 13.18 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1120

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 4.768 \text{ S/m}$; $\epsilon_r = 36.807$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-09-2013; Ambient Temp: 24.3°C; Tissue Temp: 23.2°C

Probe: EX3DV4 - SN3920; ConvF(4.52, 4.52, 4.52); Calibrated: 2/27/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (6);SEMCAD X Version 14.6.10 (7164)

5500 MHz System Verification

Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 34.1 W/kg

SAR(1 g) = 8.26 W/kg; SAR(10 g) = 2.36 W/kg (SAR corrected for target medium)

Deviation (1 g) = 3.12%

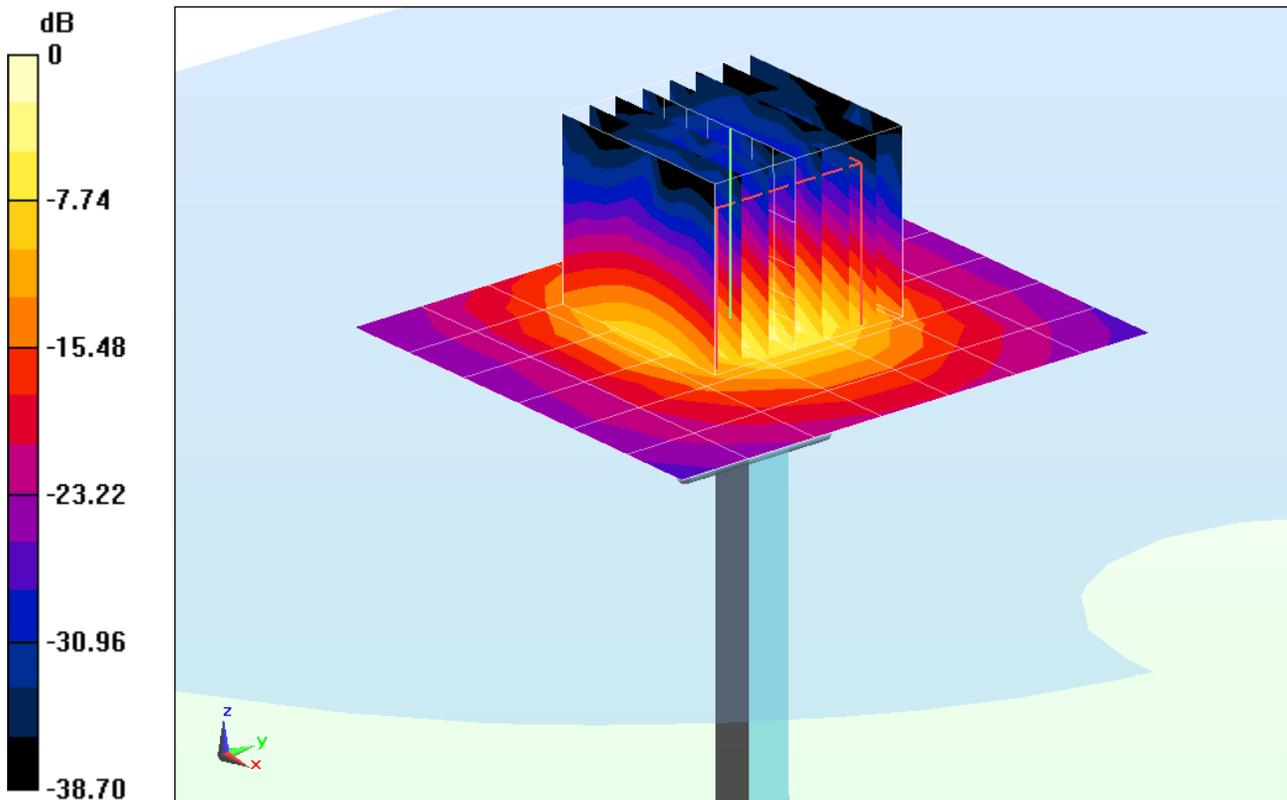

0 dB = 20.9 W/kg = 13.20 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: 1120

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5GHz Head; Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 4.884 \text{ S/m}$; $\epsilon_r = 36.704$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-09-2013; Ambient Temp: 24.3°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN3920; ConvF(4.17, 4.17, 4.17); Calibrated: 2/27/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

5600 MHz System Verification

Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 30.3 W/kg

SAR(1 g) = 7.5 W/kg; SAR(10 g) = 2.17 W/kg (SAR corrected for target medium)

Deviation (1 g) = -6.13%

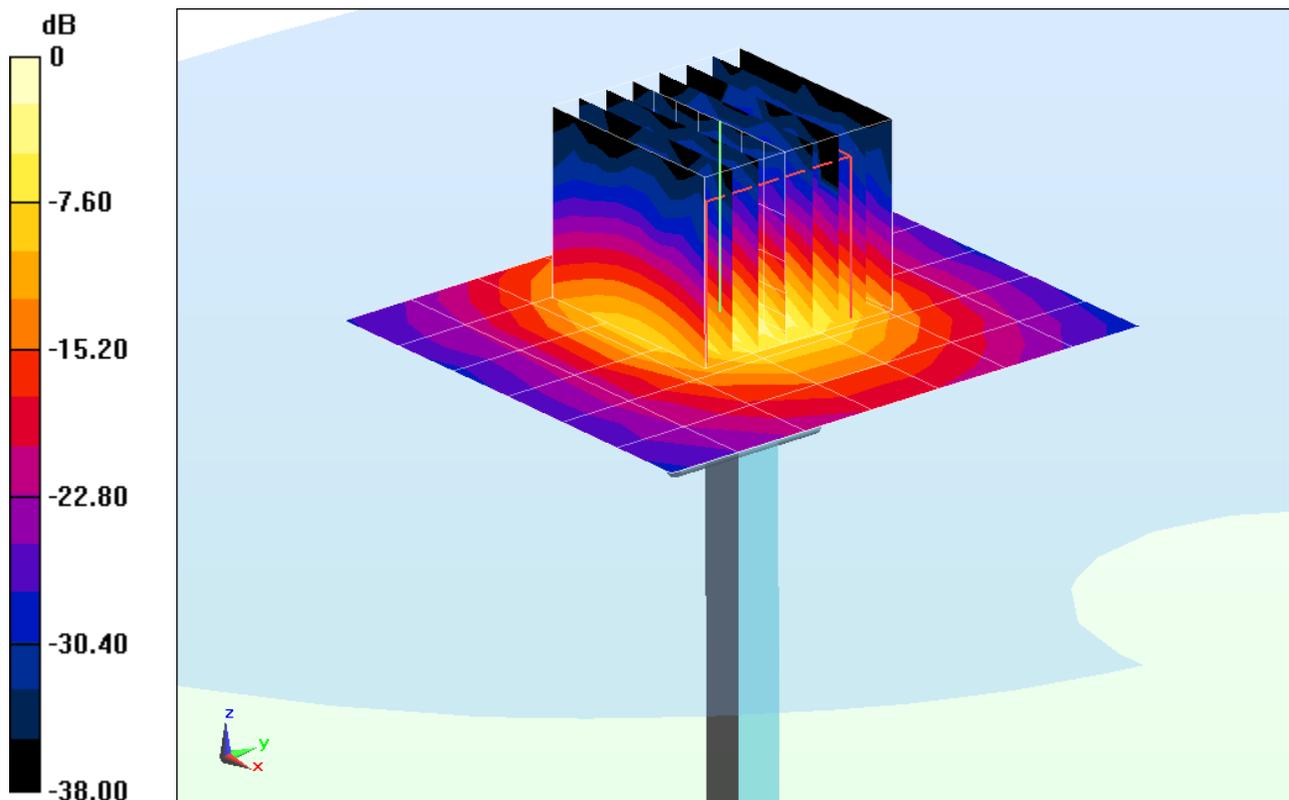

0 dB = 18.9 W/kg = 12.76 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1120

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1
Medium: 5GHz Head; Medium parameters used:

$$f = 5800 \text{ MHz}; \sigma = 5.092 \text{ S/m}; \epsilon_r = 36.381; \rho = 1000 \text{ kg/m}^3$$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-09-2013; Ambient Temp: 24.3°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN3920; ConvF(4.02, 4.02, 4.02); Calibrated: 2/27/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.10 (7164)

5800 MHz System Verification

Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm


Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 31.1 W/kg

SAR(1 g) = 7.2 W/kg; SAR(10 g) = 2.08 W/kg (SAR corrected for target medium)

Deviation (1 g) = -3.87%

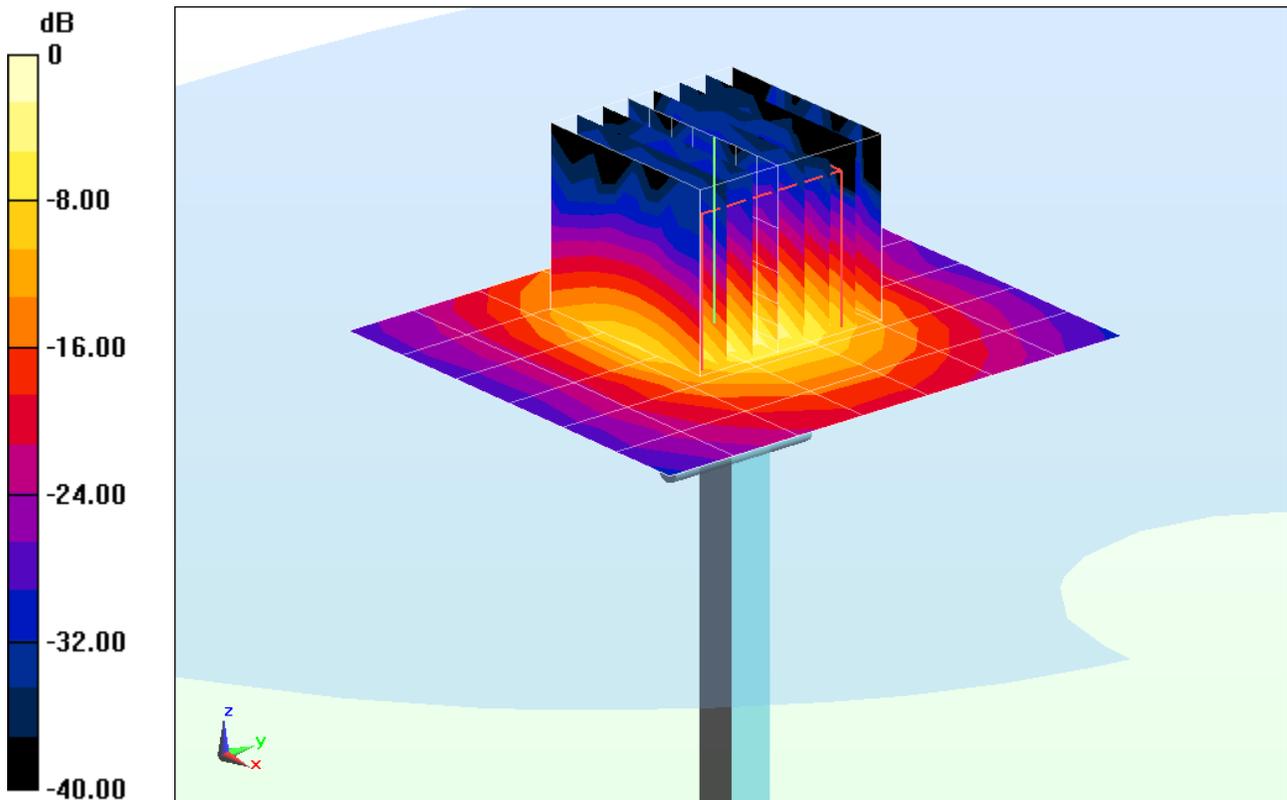

0 dB = 18.6 W/kg = 12.70 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$; $\sigma = 0.965 \text{ S/m}$; $\epsilon_r = 54.932$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-14-2013; Ambient Temp: 24.5°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3209; ConvF(6.38, 6.38, 6.38); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

750 MHz System Verification

Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.848 W/kg; SAR(10 g) = 0.562 W/kg (SAR corrected for target medium)

Deviation (1 g) = -3.96 %

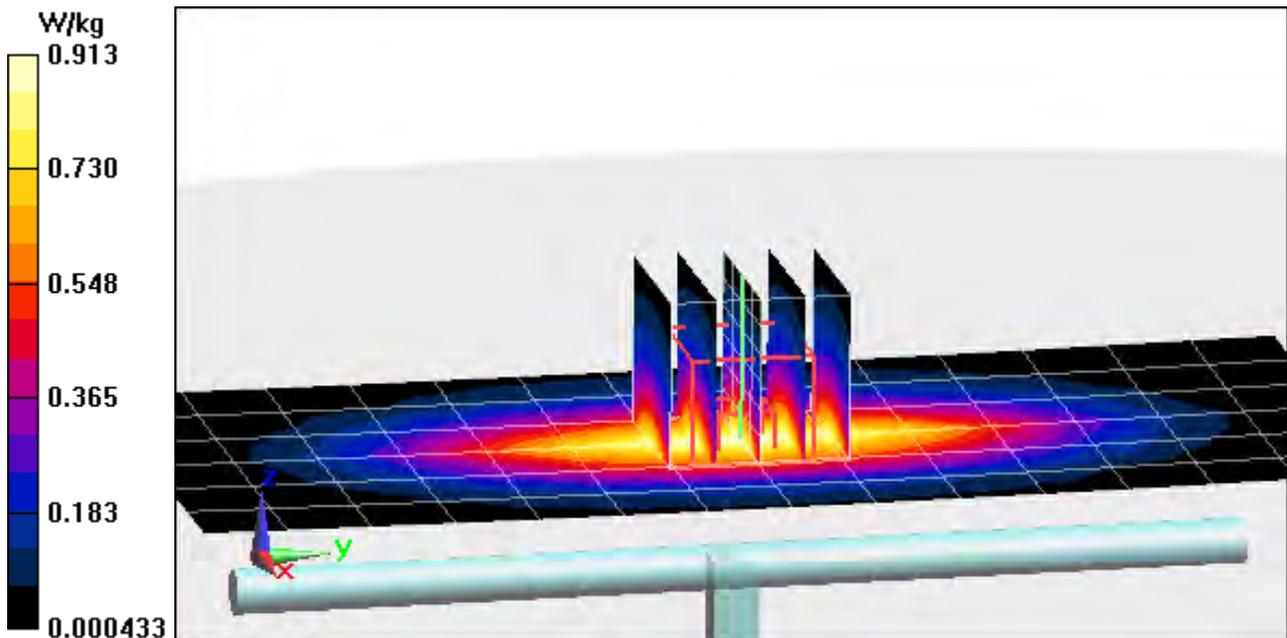

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 835 MHz; Type: D835V2; Serial: 4d132

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.014 \text{ S/m}$; $\epsilon_r = 55.695$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 07-08-2013; Ambient Temp: 24.9°C; Tissue Temp: 23.5°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.978 W/kg; SAR(10 g) = 0.645 W/kg (SAR corrected for target medium)

Deviation (1 g) = 4.49 %

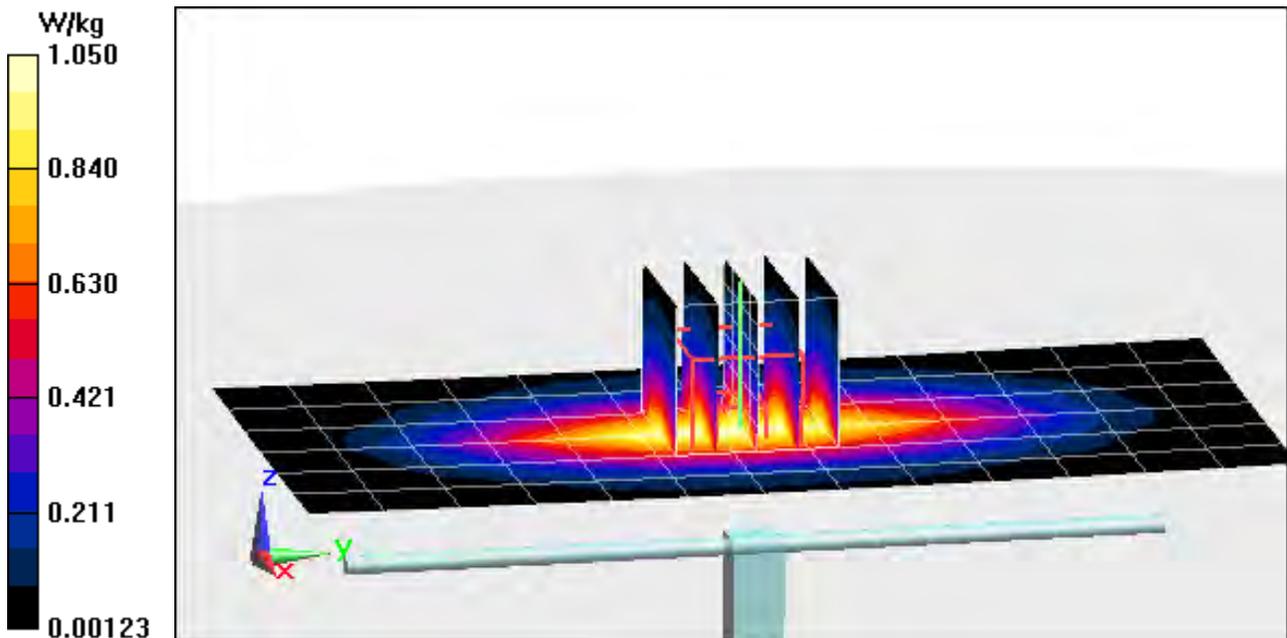

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 835 MHz; Type: D835V2; Serial: 4d026

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 1.014 \text{ S/m}$; $\epsilon_r = 54.054$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Space: 1.5 cm

Test Date: 08-08-2013; Ambient Temp: 24.3°C; Tissue Temp: 22.1°C

Probe: ES3DV3 - SN3209; ConvF(6.28, 6.28, 6.28); Calibrated: 3/15/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 3/8/2013

Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP-1158

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

835 MHz System Verification

Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.673 W/kg (SAR corrected for target medium)

Deviation (1 g) = 6.47%

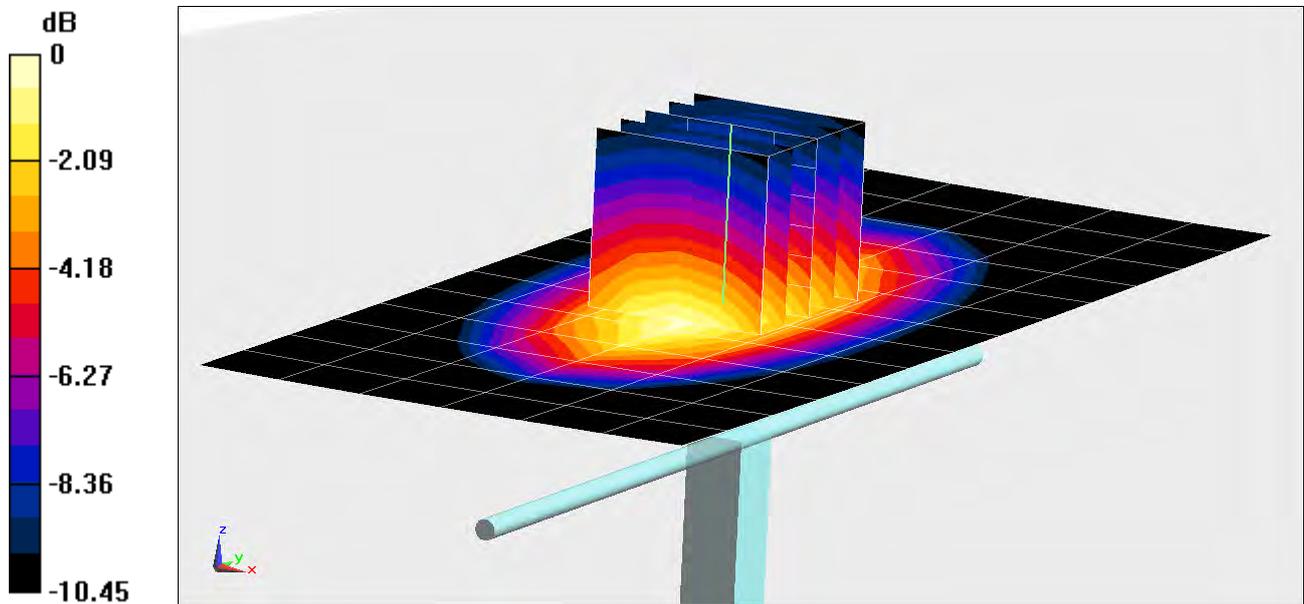

0 dB = 1.11 W/kg = 0.45 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1051

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.522 \text{ S/m}$; $\epsilon_r = 52.353$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-11-2013; Ambient Temp: 23.9°C; Tissue Temp: 23.1°C

Probe: EX3DV4 - SN3920; ConvF(7.59, 7.59, 7.59); Calibrated: 2/27/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 6.95 W/kg

SAR(1 g) = 3.89 W/kg; SAR(10 g) = 2.08 W/kg (SAR corrected for target medium)

Deviation (1 g) = 2.91 %

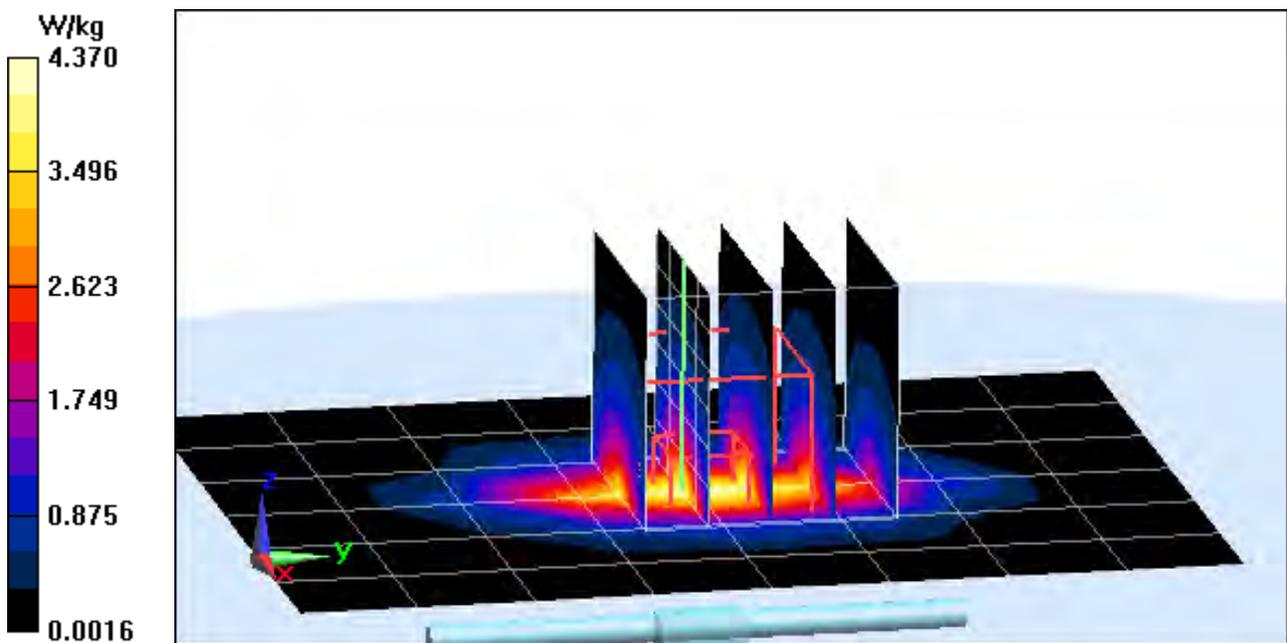

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1051

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.449 \text{ S/m}$; $\epsilon_r = 53.197$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-15-2013; Ambient Temp: 21.9°C; Tissue Temp: 22.6°C

Probe: ES3DV3 - SN3288; ConvF(5.18, 5.18, 5.18); Calibrated: 9/20/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 6.42 W/kg

SAR(1 g) = 3.7 W/kg; SAR(10 g) = 1.97 W/kg (SAR corrected for target medium)

Deviation (1 g) = -2.12 %

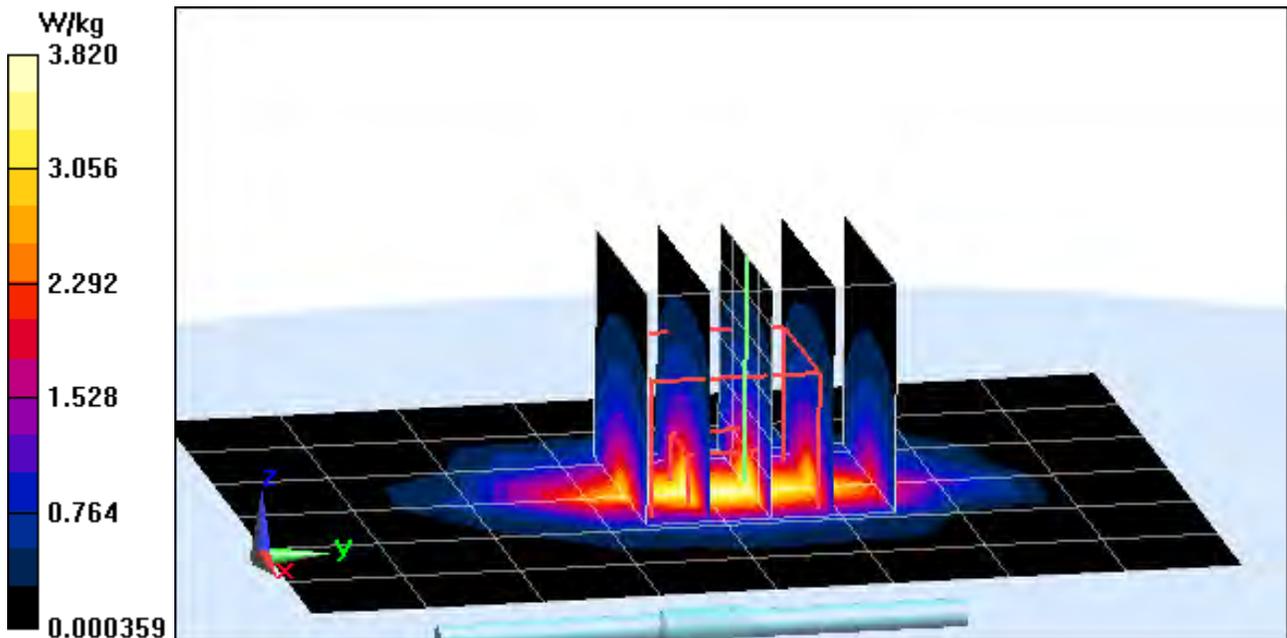

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1051

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750$ MHz; $\sigma = 1.448$ S/m; $\epsilon_r = 52.522$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-18-2013; Ambient Temp: 24.4°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3288; ConvF(5.18, 5.18, 5.18); Calibrated: 9/20/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 9/19/2012

Phantom: SAM v5.0 front; Type: QD000P40CD; Serial: TP-1646

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

1750 MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 6.52 W/kg

SAR(1 g) = 3.76 W/kg; SAR(10 g) = 2.01 W/kg (SAR corrected for target medium)

Deviation (10 g) = -1.47%

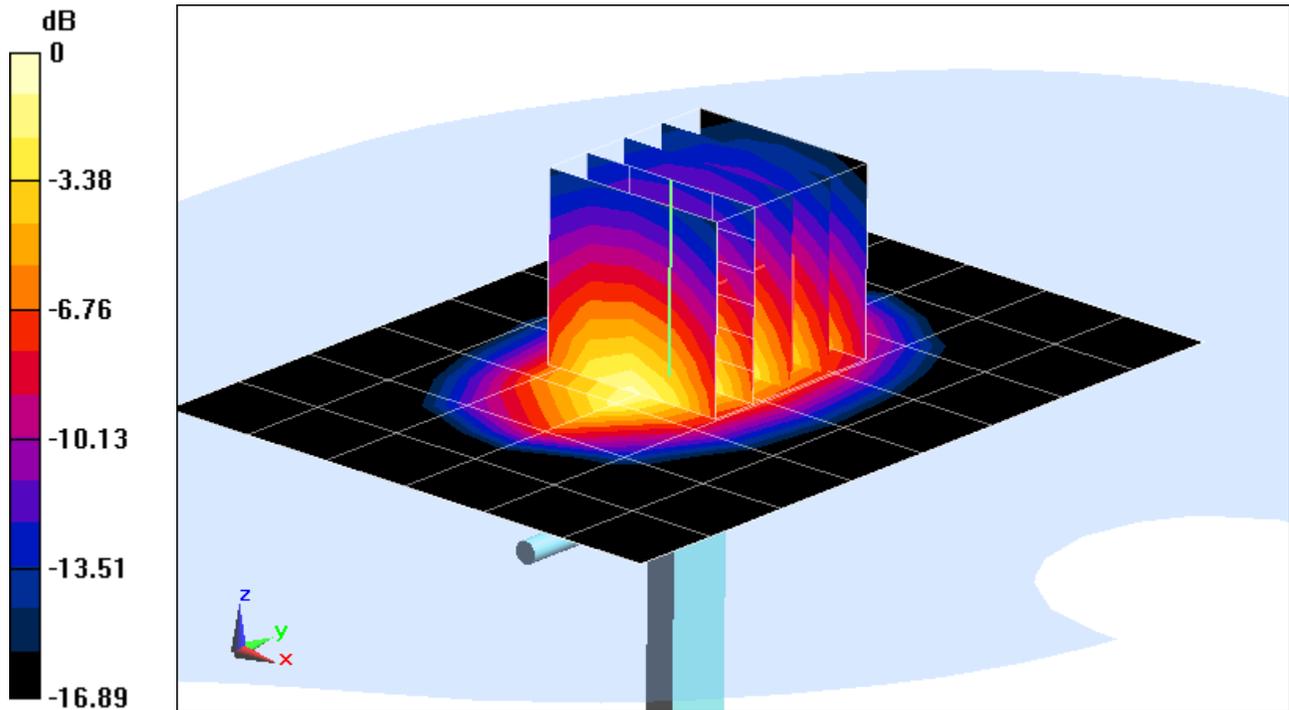

0 dB = 4.10 W/kg = 6.13 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$; $\sigma = 1.478 \text{ S/m}$; $\epsilon_r = 51.225$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-26-2013; Ambient Temp: 23.7°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3287; ConvF(4.86, 4.86, 4.86); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.8 (7164)

1750 MHz System Verification

Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.03 W/kg

SAR(1 g) = 3.96 W/kg; SAR(10 g) = 2.11 W/kg (SAR corrected for target medium)

Deviation (1 g) = 3.66 %

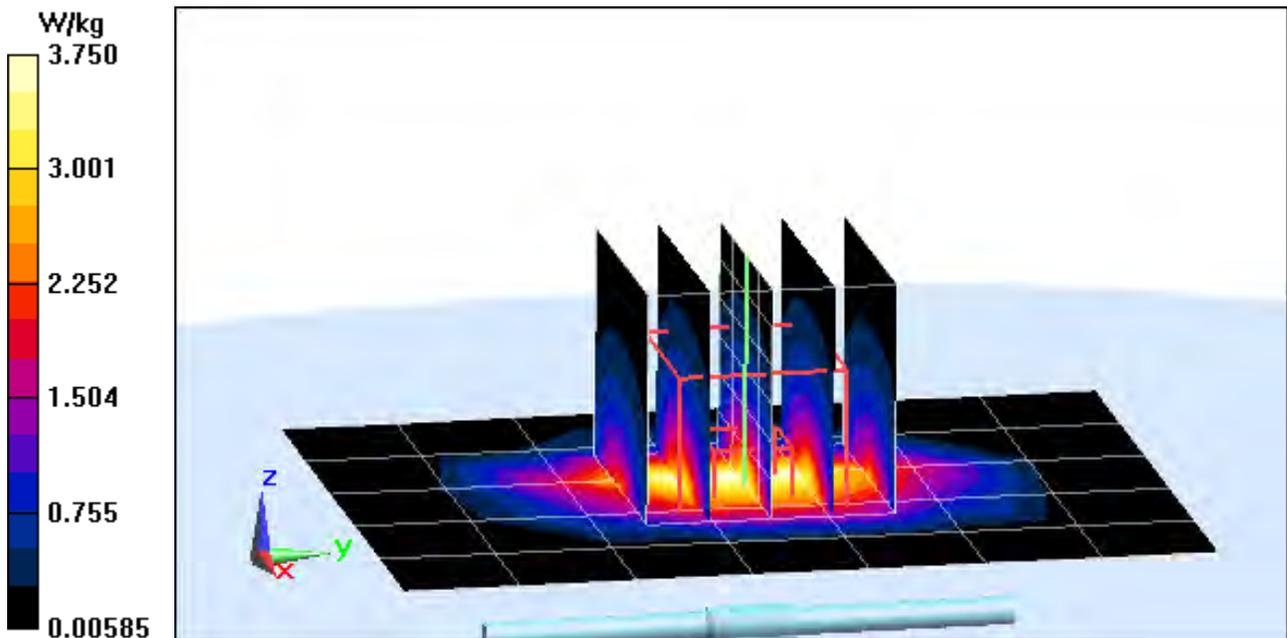

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: 1750 Body Medium parameters used:

$f = 1750$ MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 51.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-01-2013; Ambient Temp: 23.2°C; Tissue Temp: 23.0°C

Probe: ES3DV3 - SN3287; ConvF(4.86, 4.86, 4.86); Calibrated: 11/15/2012;
Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

1750 MHz System Verification

Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.03 W/kg

SAR(1 g) = 3.92 W/kg; SAR(10 g) = 2.08 W/kg (SAR corrected for target medium)

Deviation (10 g) = 1.96%

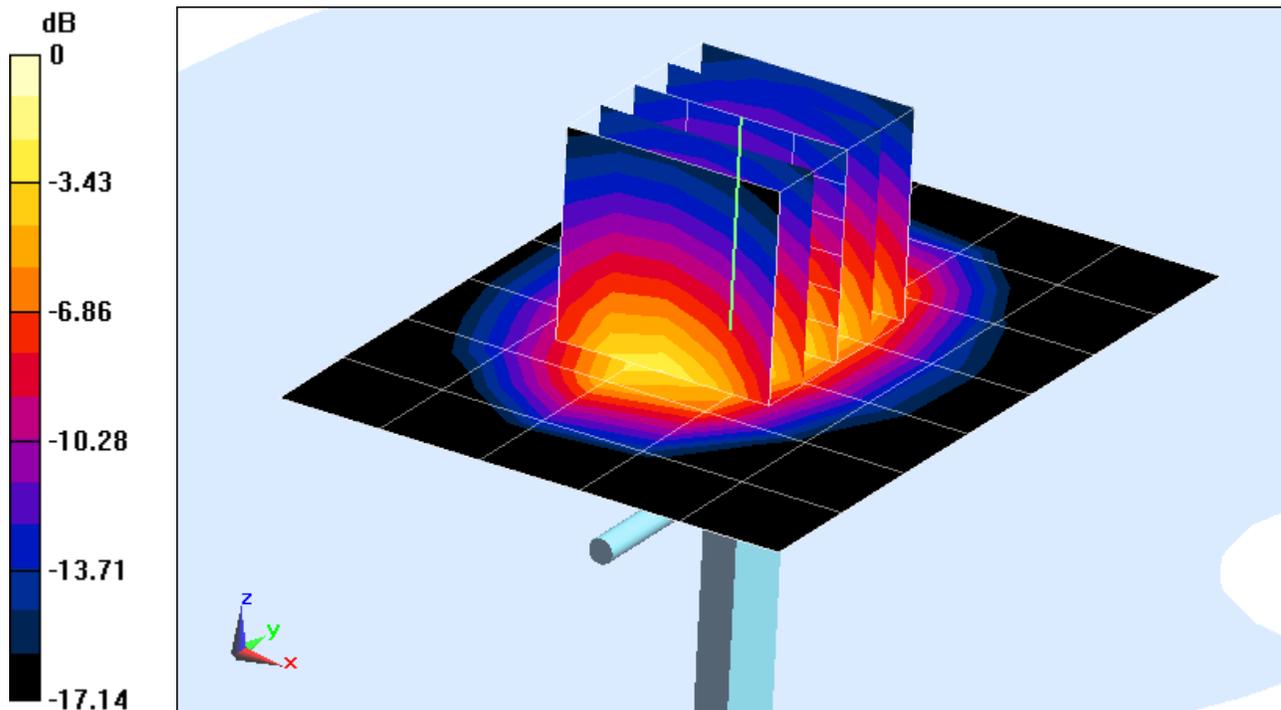

0 dB = 4.39 W/kg = 6.42 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d080

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.539 \text{ S/m}$; $\epsilon_r = 54.063$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-08-2013; Ambient Temp: 23.2°C; Tissue Temp: 22.8°C

Probe: ES3DV3 - SN3287; ConvF(4.69, 4.69, 4.69); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM Sub Dasy B; Type: SAM 5.0; Serial: TP-1626

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

1900MHz System Verification

Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.53 W/kg

SAR(1 g) = 4.25 W/kg; SAR(10 g) = 2.25 W/kg (SAR corrected for target medium)

Deviation (1 g) = 5.46 %

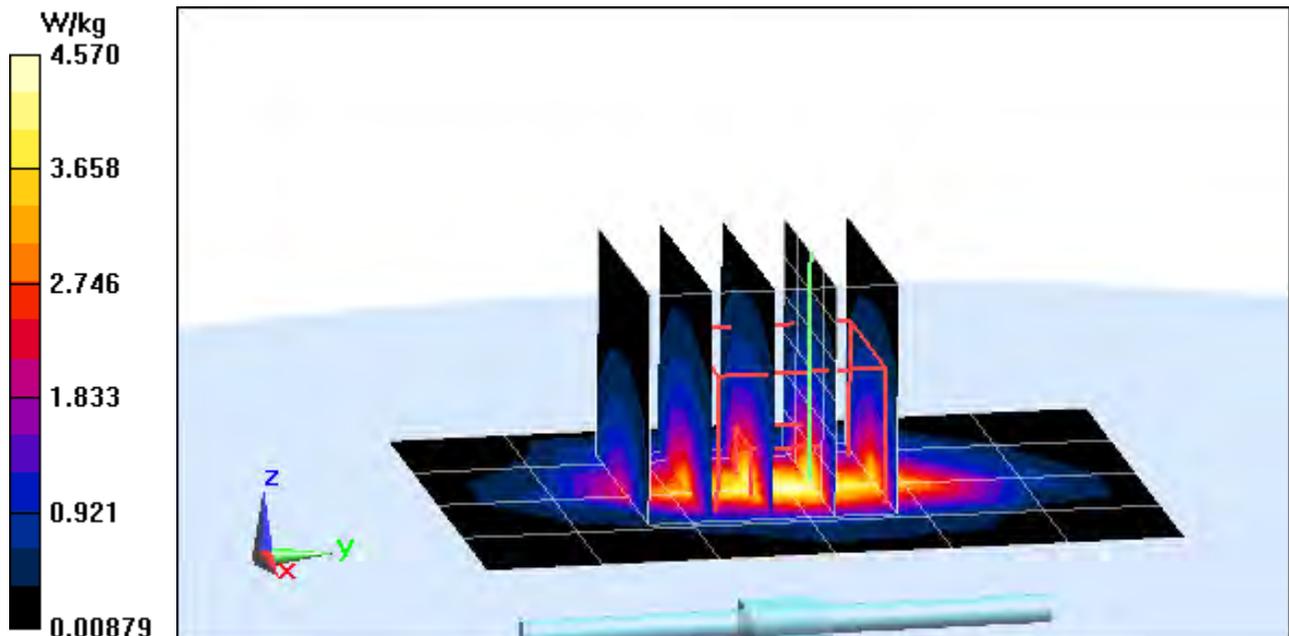

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.509 \text{ S/m}$; $\epsilon_r = 51.969$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-22-2013; Ambient Temp: 22.8°C; Tissue Temp: 23.4°C

Probe: EX3DV4 - SN3920; ConvF(7.38, 7.38, 7.38); Calibrated: 2/27/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 7.53 W/kg

SAR(1 g) = 4.22 W/kg; SAR(10 g) = 2.22 W/kg (SAR corrected for target medium)

Deviation (1 g) = 3.43 %

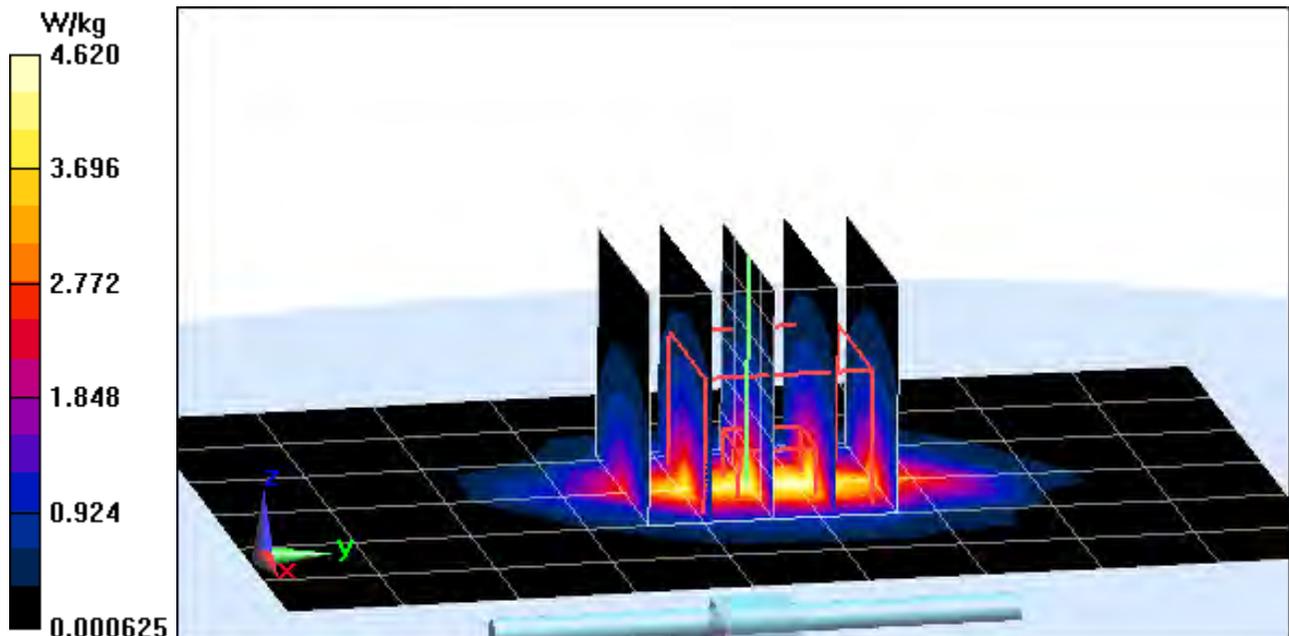

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 1900 MHz; Type: D1900V2; Serial: 5d148

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900$ MHz; $\sigma = 1.527$ S/m; $\epsilon_r = 53.185$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-01-2013; Ambient Temp: 23.6°C; Tissue Temp: 23.7°C

Probe: EX3DV4 - SN3920; ConvF(7.38, 7.38, 7.38); Calibrated: 2/27/2013;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn649; Calibrated: 2/6/2013

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: TP:-1648

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

1900 MHz System Verification

Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.54 W/kg

SAR(1 g) = 4.21 W/kg; SAR(10 g) = 2.21 W/kg (SAR corrected for target medium)

Deviation (10 g) = 7.80%

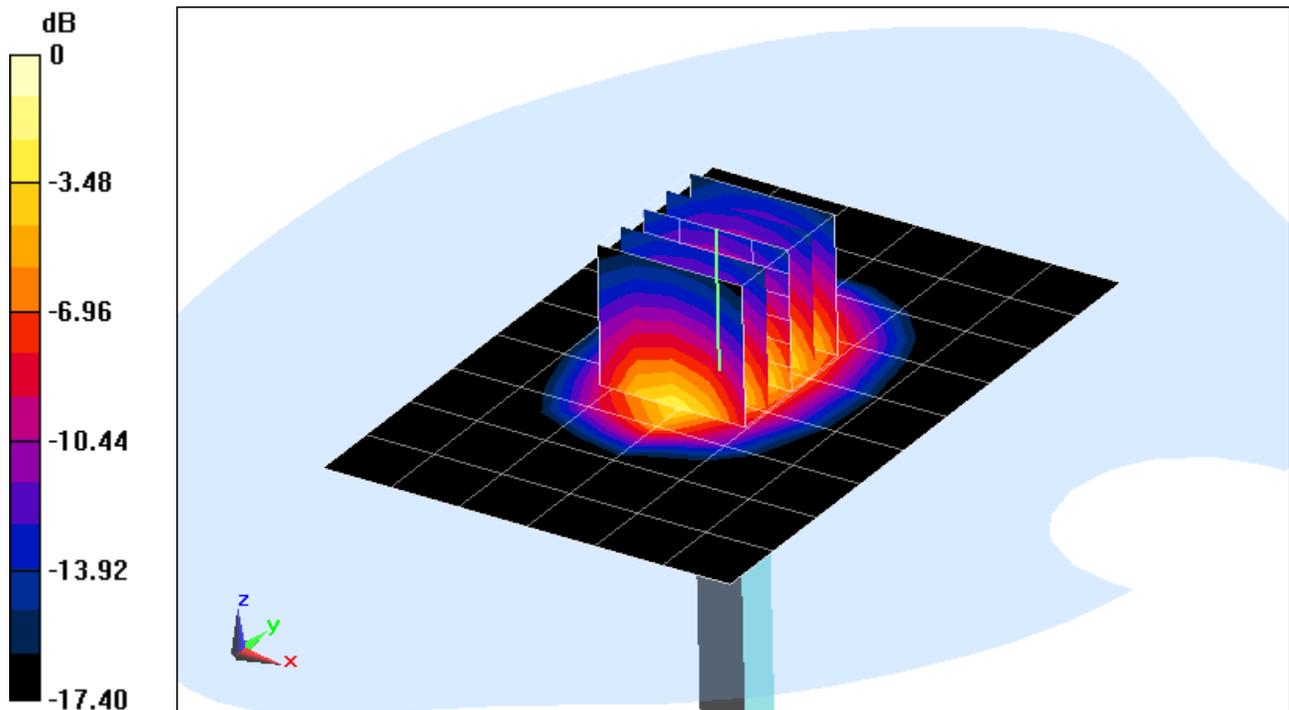

0 dB = 4.71 W/kg = 6.73 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d141

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$; $\sigma = 1.576 \text{ S/m}$; $\epsilon_r = 50.749$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Space: 1.0 cm

Test Date: 08-05-2013; Ambient Temp: 23.3°C; Tissue Temp: 23.1°C

Probe: ES3DV3 - SN3287; ConvF(4.69, 4.69, 4.69); Calibrated: 11/15/2012;

Sensor-Surface: 4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 11/13/2012

Phantom: SAM with CRP; Type: SAM 4.0; Serial: TP1375

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

1900MHz System Verification

Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 7.42 W/kg

SAR(1 g) = 4.04 W/kg; SAR(10 g) = 2.1 W/kg (SAR corrected for target medium)

Deviation (1 g) = -2.65%

Deviation (10 g) = 2.44%

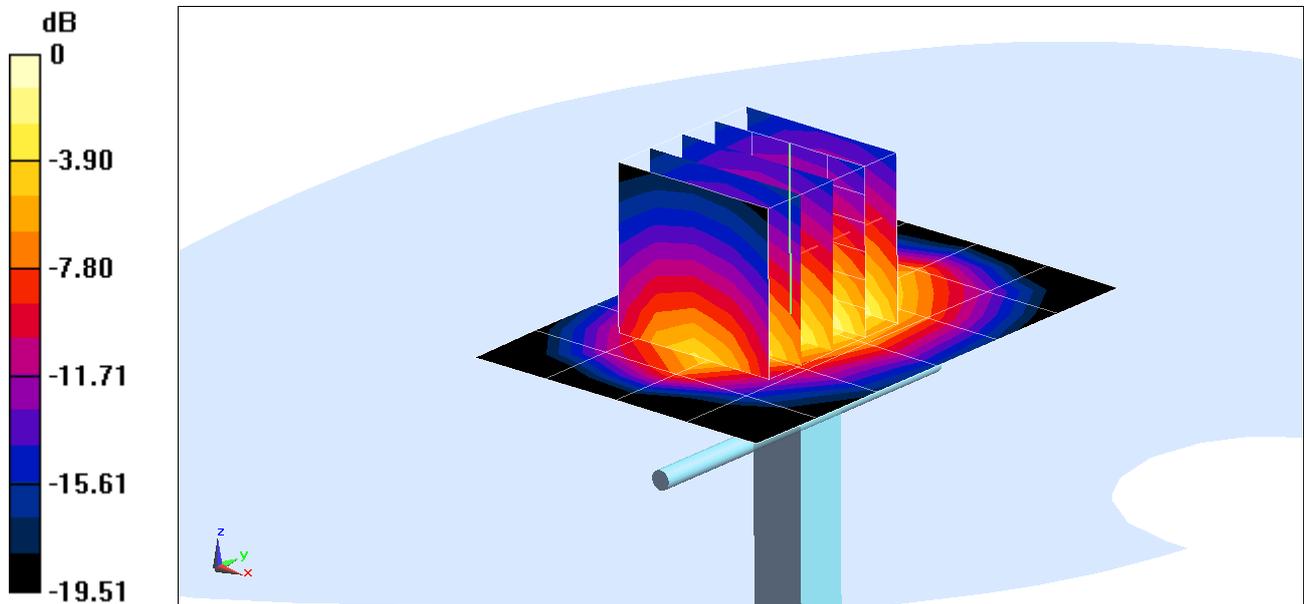

0 dB = 4.47 W/kg = 6.50 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$; $\sigma = 2.031 \text{ S/m}$; $\epsilon_r = 52.669$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-22-2013; Ambient Temp: 23.0°C; Tissue Temp: 22.6°C

Probe: ES3DV2 - SN3022; ConvF(3.97, 3.97, 3.97); Calibrated: 8/28/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, Version 4.7 (80);SEMCAD X Version 14.6.10 (7164)

2450MHz System Verification

Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 12.0 W/kg

SAR(1 g) = 5.48 W/kg; SAR(10 g) = 2.53 W/kg (SAR corrected for target medium)

Deviation (1 g) = 6.20%

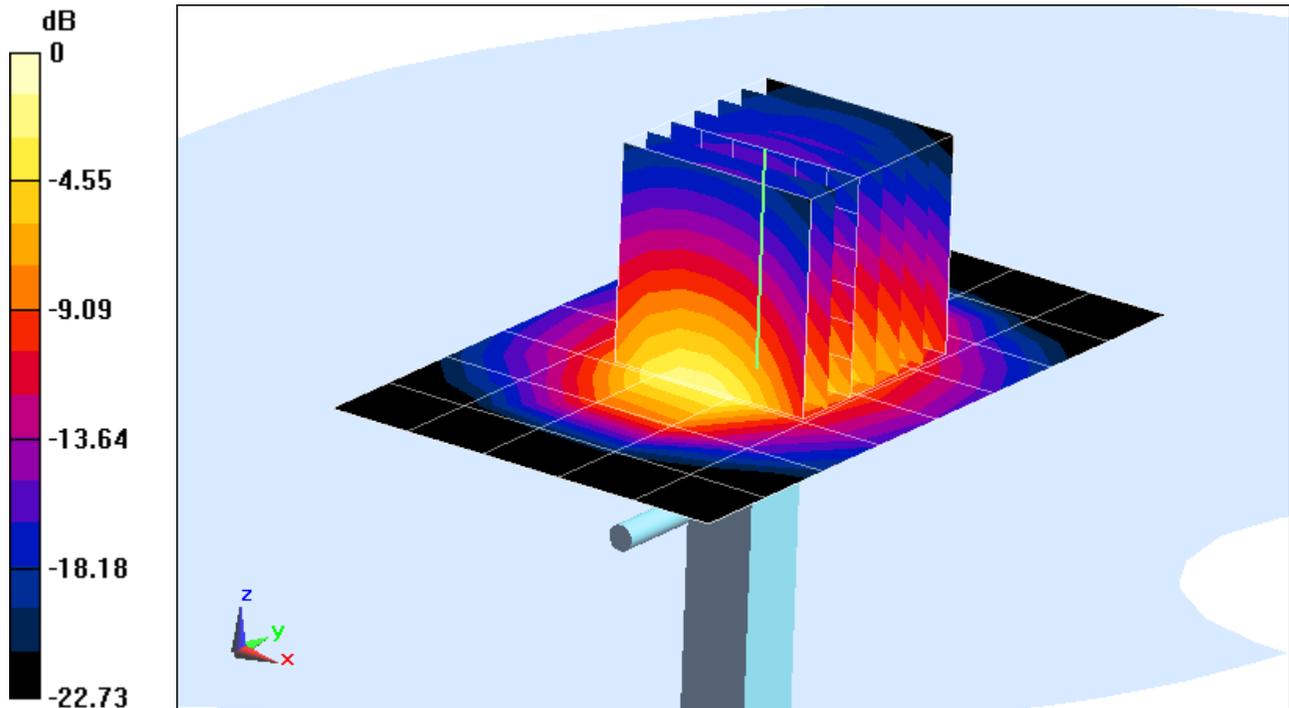

0 dB = 7.03 W/kg = 8.47 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 2450 MHz; Type: D2450V2; Serial: 719

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450$ MHz; $\sigma = 1.971$ S/m; $\epsilon_r = 51.167$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-02-2013; Ambient Temp: 23.1°C; Tissue Temp: 23.2°C

Probe: ES3DV2 - SN3022; ConvF(3.97, 3.97, 3.97); Calibrated: 8/28/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

2450MHz System Verification

Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 11.6 W/kg

SAR(1 g) = 5.31 W/kg; SAR(10 g) = 2.47 W/kg (SAR corrected for target medium)

Deviation (10 g) = 2.92%

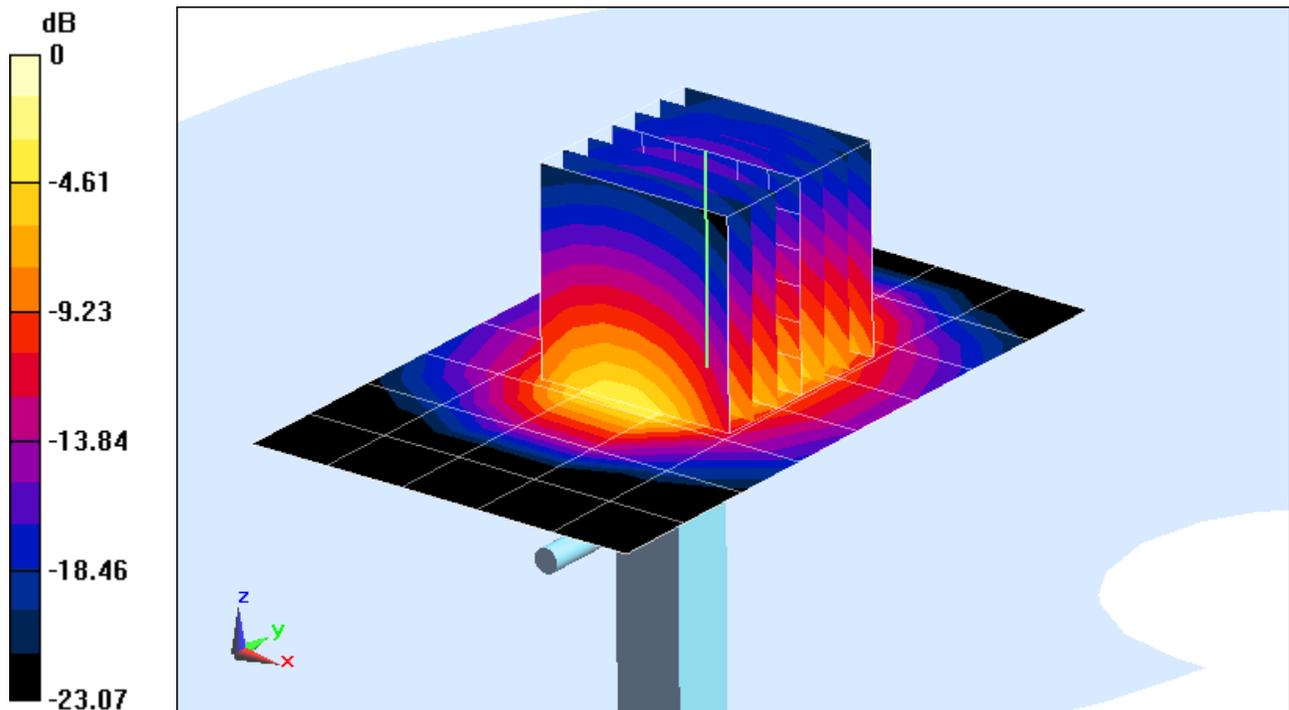

0 dB = 6.88 W/kg = 8.38 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 2600 MHz; Type: D2600V2; Serial: 1004

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Body Medium parameters used:

$f = 2600 \text{ MHz}$; $\sigma = 2.239 \text{ S/m}$; $\epsilon_r = 52.077$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 07-22-2013; Ambient Temp: 23.0°C; Tissue Temp: 22.6°C

Probe: ES3DV2 - SN3022; ConvF(3.8, 3.8, 3.8); Calibrated: 8/28/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

2600MHz System Verification

Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 13.8 W/kg

SAR(1 g) = 5.67 W/kg; SAR(10 g) = 2.5 W/kg (SAR corrected for target medium)

Deviation (1 g) = -1.39 %

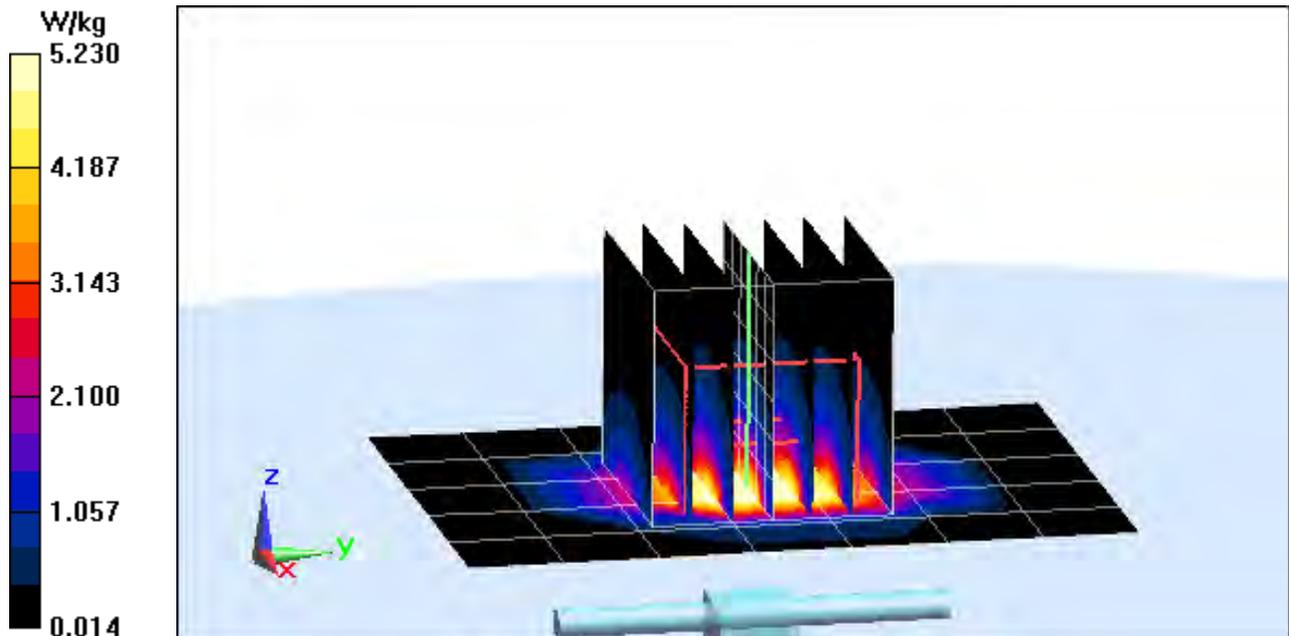

PCTEST ENGINEERING LABORATORY, INC.

DUT: SAR Dipole 2600 MHz; Type: D2600V2; Serial: 1004

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2600 Body Medium parameters used:

$f = 2600$ MHz; $\sigma = 2.150$ S/m; $\epsilon_r = 50.578$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 08-02-2013; Ambient Temp: 23.3°C; Tissue Temp: 23.2°C

Probe: ES3DV2 - SN3022; ConvF(3.8, 3.8, 3.8); Calibrated: 8/28/2012;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 8/24/2012

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1403

Measurement SW: DASY4, Version 4.7 (80); SEMCAD X Version 14.6.10 (7164)

2600MHz System Verification

Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Input Power = 20 dBm (100 mW)

Peak SAR (extrapolated) = 14.3 W/kg

SAR(1 g) = 5.54 W/kg; SAR(10 g) = 2.42 W/kg (SAR corrected for target medium)

Deviation = -1.63%

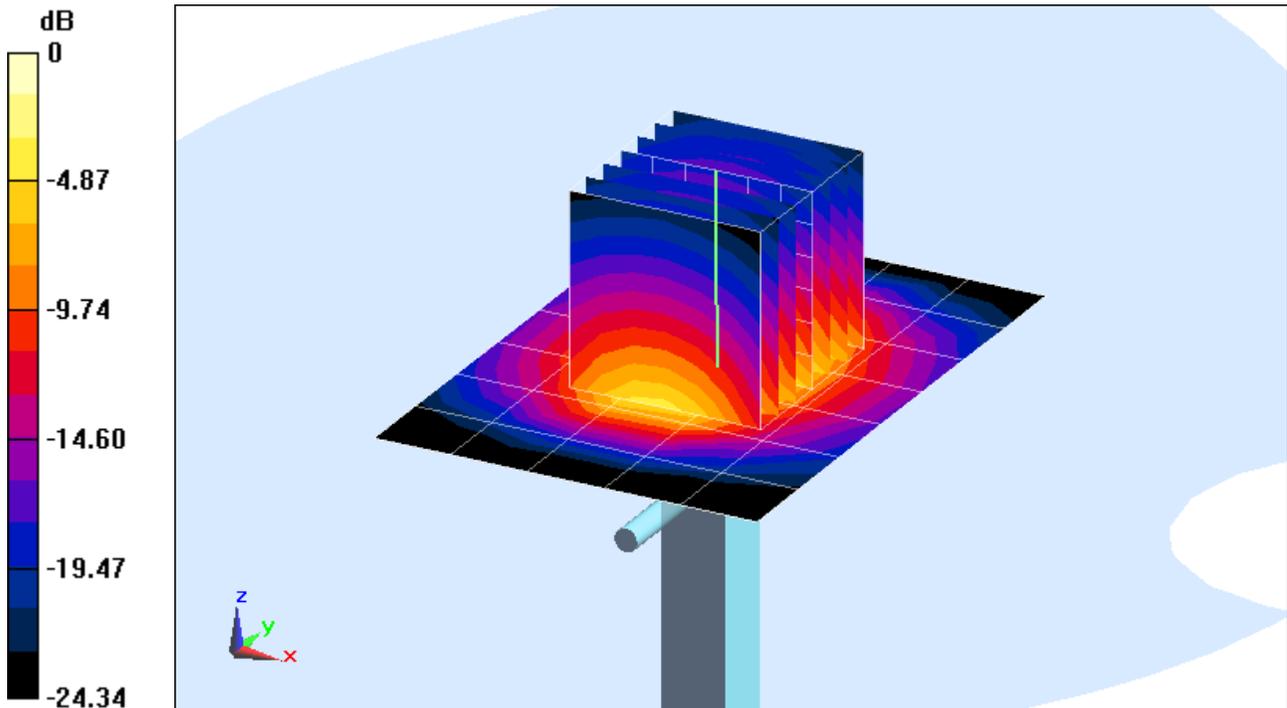

0 dB = 7.56 W/kg = 8.79 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5200 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5200 \text{ MHz}$; $\sigma = 5.437 \text{ S/m}$; $\epsilon_r = 47.182$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-06-2013; Ambient Temp: 23.6°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(3.99, 3.99, 3.99); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80);SEMCAD X Version 14.6.10 (7164)

5200MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4


Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 31.4 W/kg

SAR(1 g) = 7.57 W/kg; SAR(10 g) = 2.08 W/kg (SAR corrected for target medium)

Deviation (1 g) = 0.26%

Deviation (10 g) = -1.42 %

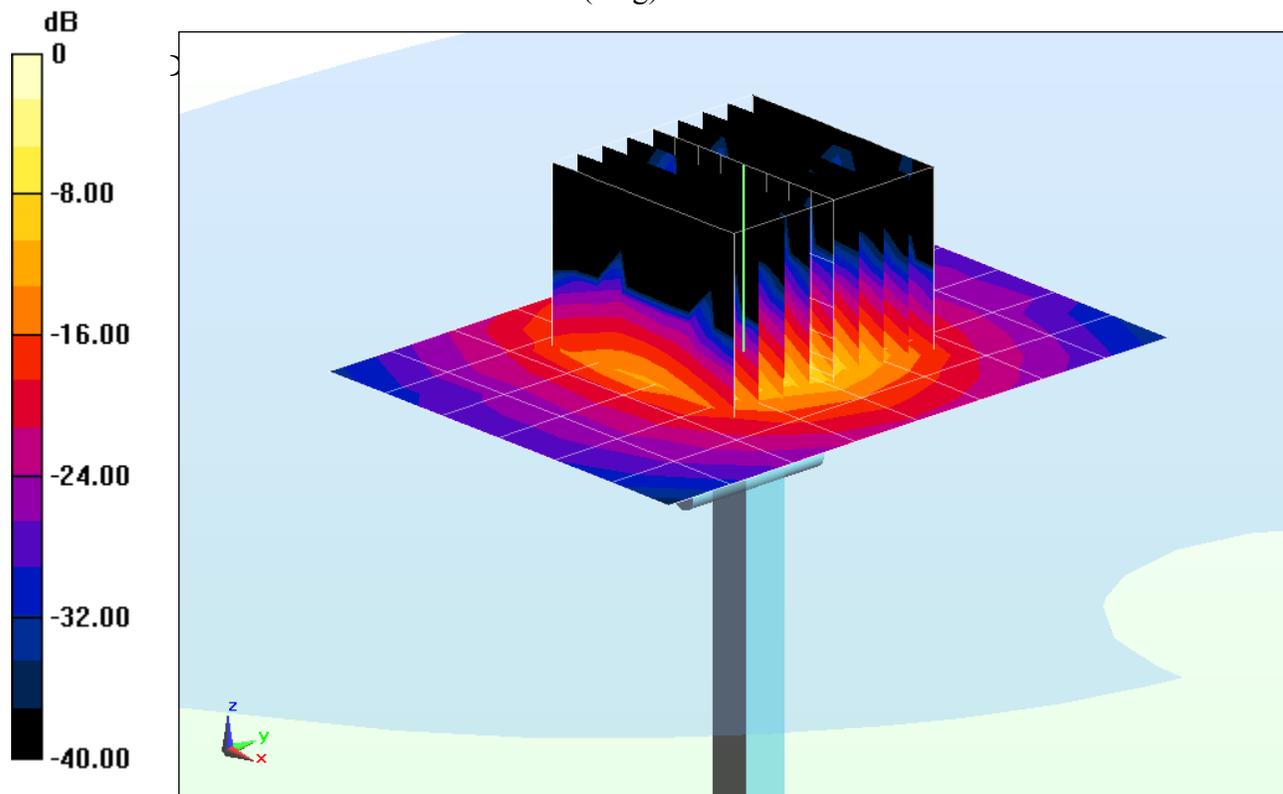

0 dB = 19.3 W/kg = 12.86 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5300 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5300 \text{ MHz}$; $\sigma = 5.546 \text{ S/m}$; $\epsilon_r = 46.946$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-06-2013; Ambient Temp: 23.6°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(3.81, 3.81, 3.81); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80);SEMCAD X Version 14.6.10 (7164)

5300MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4


Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 33.5 W/kg

SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.23 W/kg (SAR corrected for target medium)

Deviation (1 g) = 7.44%

Deviation (10 g) = 5.69 %

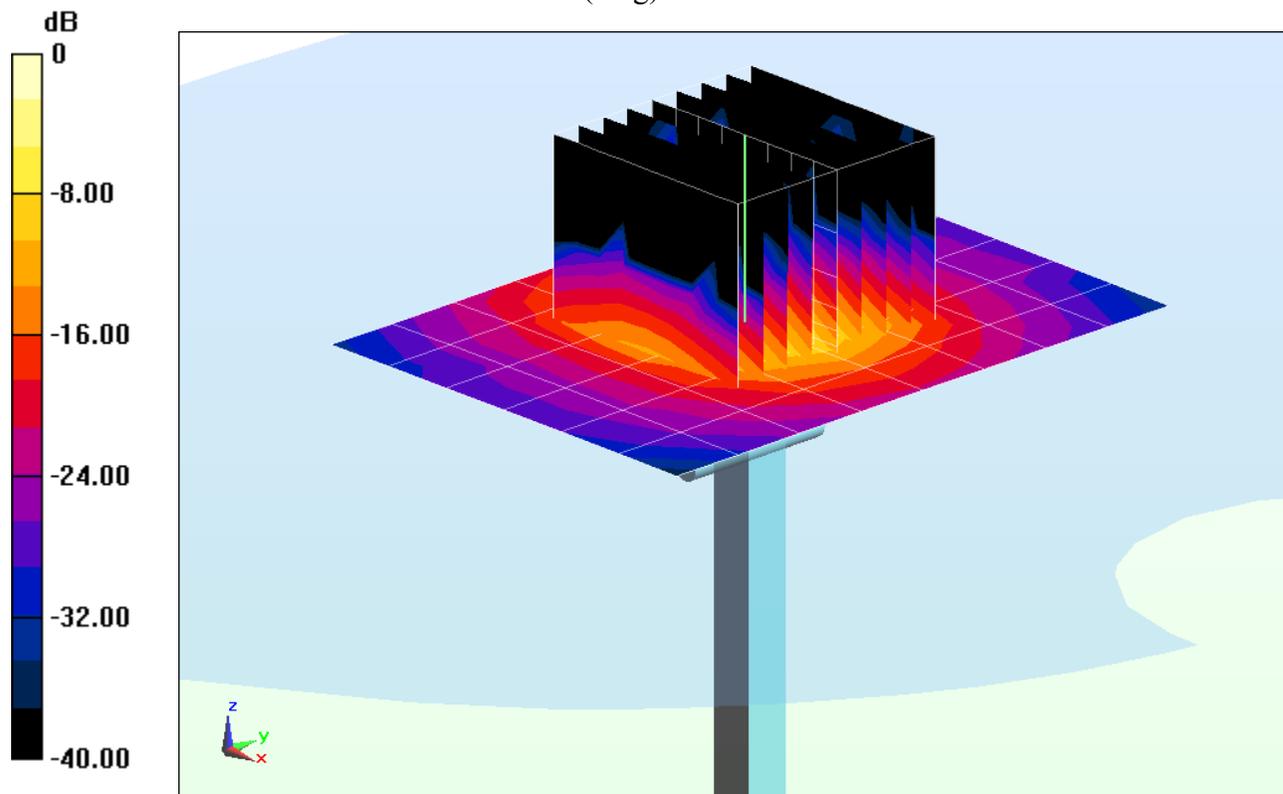

0 dB = 20.6 W/kg = 13.14 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5500 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5500 \text{ MHz}$; $\sigma = 5.801 \text{ S/m}$; $\epsilon_r = 46.707$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-06-2013; Ambient Temp: 23.6°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(3.52, 3.52, 3.52); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80);SEMCAD X Version 14.6.10 (7164)

5500MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4


Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 39.8 W/kg

SAR(1 g) = 8.11 W/kg; SAR(10 g) = 2.22 W/kg (SAR corrected for target medium)

Deviation (1 g) = 0.37%

Deviation (10 g) = -0.89 %

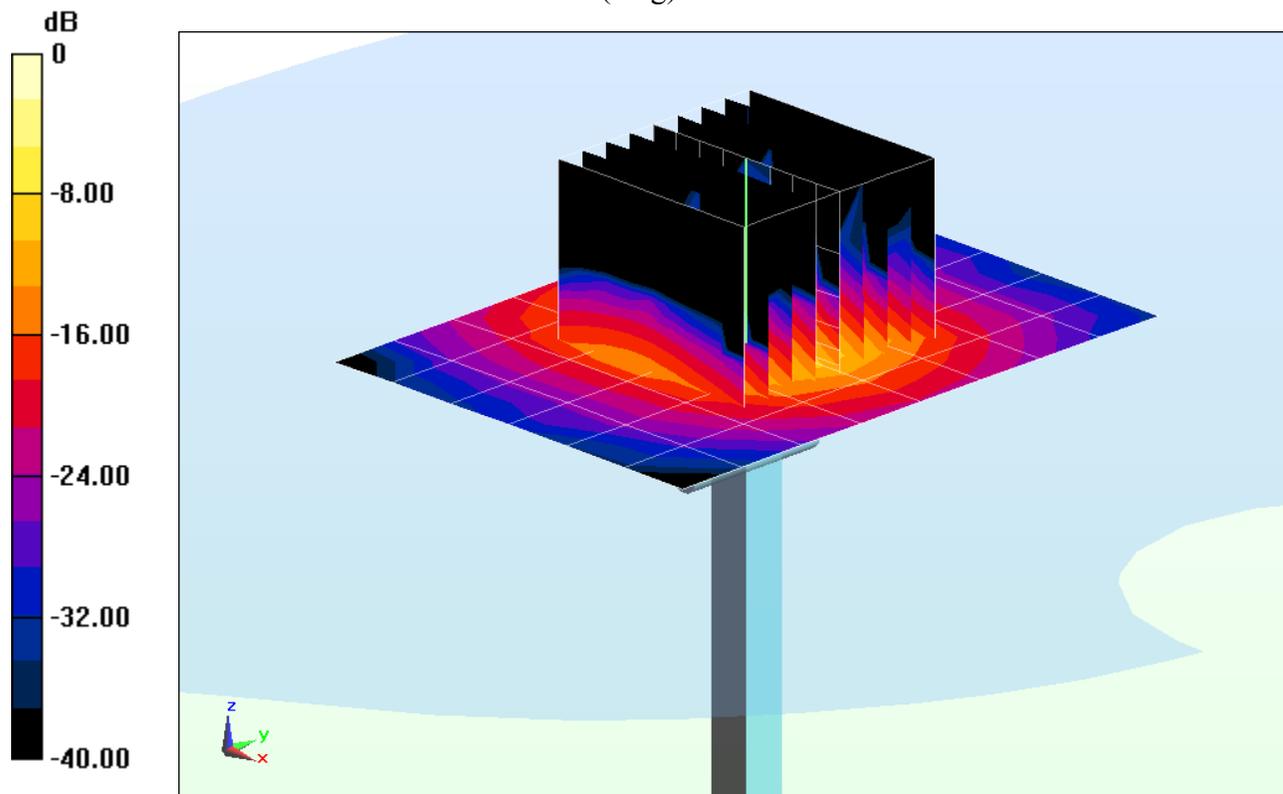

0 dB = 21.3 W/kg = 13.28 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5600 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5600 \text{ MHz}$; $\sigma = 5.946 \text{ S/m}$; $\epsilon_r = 46.517$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-06-2013; Ambient Temp: 23.7°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3589; ConvF(3.32, 3.32, 3.32); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80);SEMCAD X Version 14.6.10 (7164)

5600MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4


Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 37.4 W/kg

SAR(1 g) = 8.48 W/kg; SAR(10 g) = 2.31 W/kg (SAR corrected for target medium)

Deviation (1 g) = 5.60%

Deviation (10 g) = 3.59 %

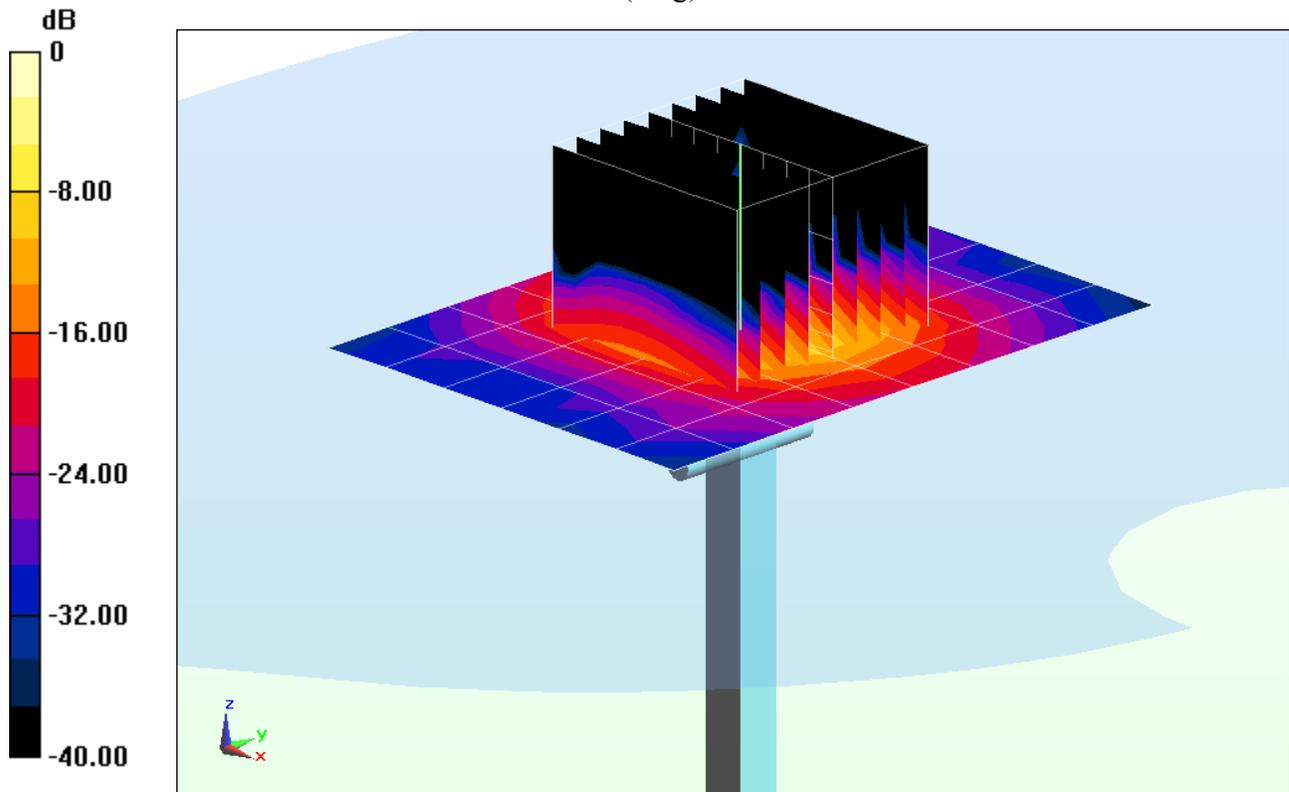

0 dB = 21.4 W/kg = 13.30 dBW/kg

PCTEST ENGINEERING LABORATORY, INC.

DUT: Dipole 5800 MHz; Type: D5GHzV2; Serial: 1057

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body; Medium parameters used:

$f = 5800 \text{ MHz}$; $\sigma = 6.198 \text{ S/m}$; $\epsilon_r = 46.11$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 05-06-2013; Ambient Temp: 23.7°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN3589; ConvF(3.66, 3.66, 3.66); Calibrated: 1/17/2013;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 1/17/2013

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, Version 4.7 (80);SEMCAD X Version 14.6.10 (7164)

5800MHz System Verification

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4


Input Power = 20.0 dBm (100 mW)

Peak SAR (extrapolated) = 39.6 W/kg

SAR(1 g) = 7.42 W/kg; SAR(10 g) = 2.02 W/kg (SAR corrected for target medium)

Deviation (1 g) = -1.20%

Deviation (10 g) = -2.42 %

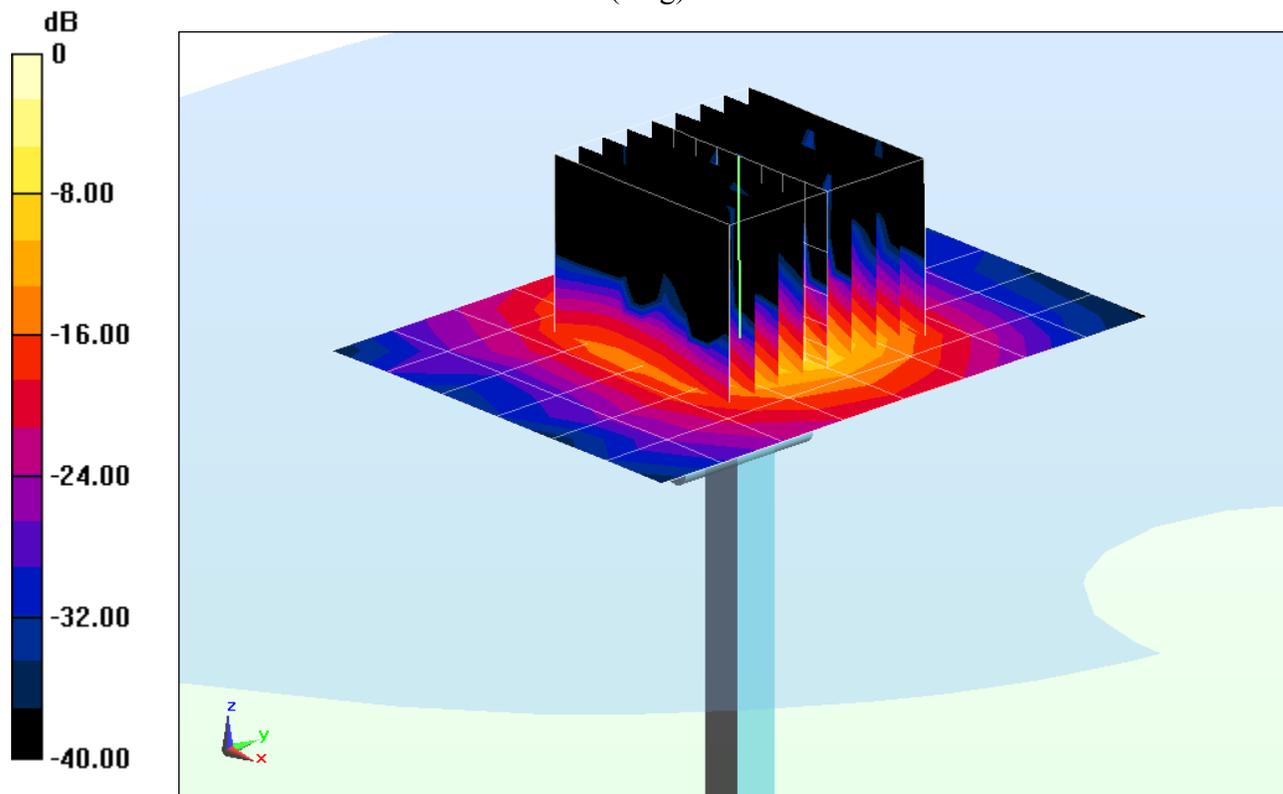

0 dB = 19.2 W/kg = 12.83 dBW/kg