



# TEST REPORT

**Test Report No. :** UL-RPT-RP10028183JD01A

**Manufacturer** : Sony Mobile Communications AB  
**Type No.** : PM-0650-BV  
**FCC ID** : PY7PM-0650  
**IC Certification No.** : 4170B-PM0650  
**Test Standard(s)** : FCC Parts 15.107 & 15.109 & ICES – 003 Issue 5

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 1.0

**Date of Issue:** 22 July 2013

**Checked by:**

Steven White  
WiSE Project Lead

**Issued by :**

pp

John Newell  
Group Quality Manager, WiSE  
Basingstoke,  
UL VS LTD



This laboratory is accredited by UKAS.  
The tests reported herein have been  
performed in accordance with its' terms  
of accreditation.

**UL VS LTD**

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK  
Telephone: +44 (0)1256 312000  
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

---

## **Table of Contents**

|  |           |
|--|-----------|
| <b>1. Customer Information.....</b>                                | <b>4</b>  |
| <b>2. Summary of Testing.....</b>                                  | <b>5</b>  |
| 2.1. General Information   | 5         |
| 2.2. Summary of Test Results                                       | 5         |
| 2.3. Methods and Procedures  | 5         |
| 2.4. Deviations from the Test Specification                        | 5         |
| <b>3. Equipment Under Test (EUT) .....</b>                         | <b>6</b>  |
| 3.1. Identification of Equipment Under Test (EUT)                  | 6         |
| 3.2. Description of EUT  | 7         |
| 3.3. Modifications Incorporated in the EUT                         | 7         |
| 3.4. Additional Information Related to Testing                     | 8         |
| 3.5. Support Equipment   | 8         |
| <b>4. Operation and Monitoring of the EUT during Testing .....</b> | <b>9</b>  |
| 4.1. Operating Modes   | 9         |
| 4.2. Configuration and Peripherals                                 | 9         |
| <b>5. Measurements, Examinations and Derived Results .....</b>     | <b>10</b> |
| 5.1. General Comments  | 10        |
| 5.2. Test Results  | 11        |
| 5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions          | 11        |
| 5.2.2. Receiver/Idle Mode Radiated Spurious Emissions              | 14        |
| <b>6. Measurement Uncertainty .....</b>                            | <b>18</b> |
| <b>7. Report Revision History .....</b>                            | <b>19</b> |

**1. Customer Information**

|                      |   |
|----------------------|---|
| <b>Company Name:</b> | Sony Mobile Communications AB                   |
| <b>Address:</b>      | Nya Vattentorget<br>Lund<br>SE-221 88<br>Sweden |

## 2. Summary of Testing

### 2.1. General Information

|                                 |   |
|---------------------------------|---|
| <b>Specification Reference:</b> | 47CFR15.107 and 47CFR15.109   |
| <b>Specification Title:</b>     | Code of Federal Regulations Volume 47 (Telecommunications):<br>Part 15 Subpart B (Unintentional Radiators) - Sections 15.107 and 15.109 |
| <b>Specification Reference:</b> | ICES-003 Issue 5  |
| <b>Specification Title:</b>     | Information Technology Equipment (ITE) – Limits and methods of measurement  |
| <b>Site Registration FCC:</b>   | 209735  |
| <b>Site Registration IC:</b>    | 3245B-2   |
| <b>Location of Testing:</b>     | UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park,<br>Basingstoke, Hampshire, RG24 8AH, United Kingdom                      |
| <b>Test Dates:</b>              | 16 <sup>th</sup> – 19 <sup>th</sup> July 2013   |

### 2.2. Summary of Test Results

| <b>FCC (47CFR) / ICE003</b>   | <b>Measurement</b>                                 | <b>Result</b>   |
|---|--|---|
| Part 15.107(a) / 6.1  | Receiver/Idle Mode AC Conducted Spurious Emissions |  |
| Part 15.109 / 6.2   | Receiver/Idle Mode Radiated Spurious Emissions     |  |
| <b>Key to Results</b>   |  |   |
|  = Complied  = Did not comply |  |   |

### 2.3. Methods and Procedures

|                   |  |
|-------------------|--|
| <b>Reference:</b> | ANSI C63.4 (2009)  |
| <b>Title:</b>     | American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. |

### 2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT)**

|                                 |                 |
|---------------------------------|-----------------|
| <b>Brand Name:</b>              | Sony            |
| <b>Type Number:</b>             | PM-0650-BV      |
| <b>IMEI:</b>                    | 004402451269850 |
| <b>Serial Number:</b>           | CB5124XVBJ      |
| <b>Hardware Version Number:</b> | AP2             |
| <b>Software Version Number:</b> | 14.1.G.1.241    |
| <b>FCC ID:</b>                  | PY7PM-0650      |
| <b>Industry Canada ID:</b>      | 4170B-PM0650    |

|                              |            |
|------------------------------|------------|
| <b>Brand Name:</b>           | Sony       |
| <b>Description:</b>          | AC Charger |
| <b>Model Name or Number:</b> | EP880      |

|                              |            |
|------------------------------|------------|
| <b>Brand Name:</b>           | Monoprice  |
| <b>Description:</b>          | MHL cable  |
| <b>Model Name or Number:</b> | LL84201-F4 |

|                              |             |
|------------------------------|-------------|
| <b>Brand Name:</b>           | Sony        |
| <b>Description:</b>          | MHL Adaptor |
| <b>Model Name or Number:</b> | IM750       |

|                              |           |
|------------------------------|-----------|
| <b>Brand Name:</b>           | Sony      |
| <b>Description:</b>          | USB Cable |
| <b>Model Name or Number:</b> | EC801     |

|                              |       |
|------------------------------|-------|
| <b>Brand Name:</b>           | Sony  |
| <b>Description:</b>          | PHF   |
| <b>Model Name or Number:</b> | MH750 |

|                              |               |
|------------------------------|---------------|
| <b>Brand Name:</b>           | Sony          |
| <b>Description:</b>          | Magnetic Plug |
| <b>Model Name or Number:</b> | EC21          |

### **3.2. Description of EUT**

The equipment under test (EUT) is a model of GSM/UMTS/LTE mobile phone with integrated antenna and inbuilt Li-Polymer battery. The EUT supports GSM 850/900/1800/1900MHz bands, WCDMA FDD bands 1/2/4/5/8 and LTE FDD bands 1/2/3/4/5/7/8/20. It also supports GPRS service with multi-slots class 33 and EGPRS service with multi-slots class 33 too. The HSDPA and HSUPA features are also supported. It has MP3, camera, FM radio, USB memory, GPS receiver, NFC, Mobile High-Definition Link (MHL), Bluetooth (EDR and Bluetooth 4.0), WLAN (802.11 a/b/g/n/ac) and Wi-Fi hotspot functions.”

### **3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

**3.4. Additional Information Related to Testing**

|                                     |             |               |
|-------------------------------------|-------------|---------------|
| <b>Type of Radio Device:</b>        | Transceiver |               |
| <b>Power Supply Requirement(s):</b> | Nominal     | 120 VAC 60 Hz |

**3.5. Support Equipment**

The following support equipment was used to exercise the EUT during testing:

|                              |                      |  |
|------------------------------|----------------------|--|
| <b>Brand Name:</b>           | Not stated           |  |
| <b>Description:</b>          | 2 GB Micro SD Card   |  |
| <b>Model Name or Number:</b> | Not marked or stated |  |
| <b>Serial Number:</b>        | Not marked or stated |  |

|                              |                                |  |
|------------------------------|--------------------------------|--|
| <b>Brand Name:</b>           | Logik                          |  |
| <b>Description:</b>          | 22" High Definition Television |  |
| <b>Model Name or Number:</b> | L22FE12A                       |  |
| <b>Serial Number:</b>        | 1309020661                     |  |

## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

- Receiver/Idle mode.

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration(s):

- Config 1- Handset with the AC charger, USB Cable, MHL adaptor, MHL Cable, SD card and PHF.
- Config 2 - Handset with the AC charger, magnetic Plug, SD card and PHF.
- Receiver/Idle mode radiated spurious emissions pre-scans were performed below 1 GHz in both configurations with configuration 2 providing worst case results. Configuration 2 was then used for measurements above 1 GHz.
- AC conducted emissions pre-scans were also performed in both configurations, with configuration 2 providing worst case results and being used for final measurements.
- During testing the handset display was set to it maximum brightness, all power saving settings were disabled and the MHL adaptor/PHF and handset were exercised by playing an mp4 file.

The radiated sample with IMEI 004402451269850 was used for all measurements.

## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

## 5.2. Test Results

### 5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions

|                   |                 |            |                       |
|-------------------|-----------------|------------|-----------------------|
| Test Engineer:    | Nick Jones      | Test Date: | 19 <sup>th</sup> July |
| Test Sample IMEI: | 004402451269850 |            |                       |

|                   |                                    |
|-------------------|------------------------------------|
| FCC/IC Reference: | Part 15.107 / ICES 003 Section 6.1 |
| Test Method Used: | ANSI C63.4-2009                    |

#### Environmental Conditions:

|                        |          |
|------------------------|----------|
| Temperature (°C):      | 26 to 23 |
| Relative Humidity (%): | 40       |

#### Note(s):

1. Measurements using an average detector were not performed on the Neutral line, due to all emissions being at least 20dB from the pre-scan limit.

#### Results: Live / Quasi Peak

| Frequency (MHz) | Line | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|------|--------------------|--------------------|-------------|----------|
| 1.153           | Live | 37.1               | 56.0               | 18.9        | Complied |
| 1.180           | Live | 37.6               | 56.0               | 18.4        | Complied |
| 1.212           | Live | 37.9               | 56.0               | 18.1        | Complied |
| 1.230           | Live | 38.1               | 56.0               | 17.9        | Complied |
| 1.248           | Live | 38.2               | 56.0               | 17.8        | Complied |
| 1.252           | Live | 38.3               | 56.0               | 17.7        | Complied |
| 1.342           | Live | 39.0               | 56.0               | 17.0        | Complied |
| 1.392           | Live | 40.3               | 56.0               | 15.7        | Complied |
| 1.392           | Live | 40.4               | 56.0               | 15.6        | Complied |
| 1.450           | Live | 37.9               | 56.0               | 18.1        | Complied |


#### Results: Live / Average

| Frequency (MHz) | Line | Level (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Result   |
|-----------------|------|--------------------|--------------------|-------------|----------|
| 1.050           | Live | 25.3               | 46.0               | 20.7        | Complied |
| 1.126           | Live | 25.2               | 46.0               | 20.8        | Complied |
| 1.189           | Live | 24.9               | 46.0               | 21.1        | Complied |
| 1.320           | Live | 25.2               | 46.0               | 20.8        | Complied |
| 1.396           | Live | 25.7               | 46.0               | 20.3        | Complied |
| 18.145          | Live | 30.8               | 50.0               | 19.2        | Complied |


**Receiver/Idle Mode AC Conducted Spurious Emissions (continued)****Results: Neutral / Quasi Peak**

| <b>Frequency<br/>(MHz)</b> | <b>Line</b> | <b>Level<br/>(dB<math>\mu</math>V)</b> | <b>Limit<br/>(dB<math>\mu</math>V)</b> | <b>Margin<br/>(dB)</b> | <b>Result</b> |
|----------------------------|-------------|--|--|------------------------|---------------|
| 0.150                      | Neutral     | 51.2                                   | 66.0                                   | 14.8                   | Complied      |
| 0.1590                     | Neutral     | 55.0                                   | 65.5                                   | 10.5                   | Complied      |
| 0.177                      | Neutral     | 38.0                                   | 64.6                                   | 26.6                   | Complied      |
| 0.186                      | Neutral     | 42.4                                   | 64.2                                   | 21.8                   | Complied      |
| 0.213                      | Neutral     | 25.9                                   | 63.1                                   | 37.2                   | Complied      |
| 0.231                      | Neutral     | 43.8                                   | 62.4                                   | 18.6                   | Complied      |
| 0.240                      | Neutral     | 35.9                                   | 62.1                                   | 26.2                   | Complied      |

**Receiver/Idle Mode AC Conducted Spurious Emissions (continued)**

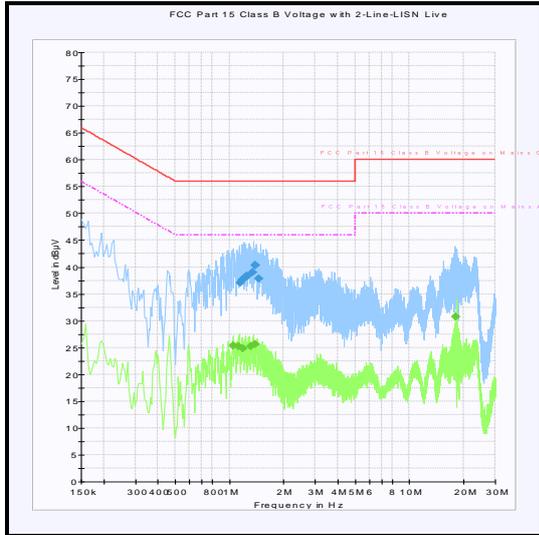

**Live**

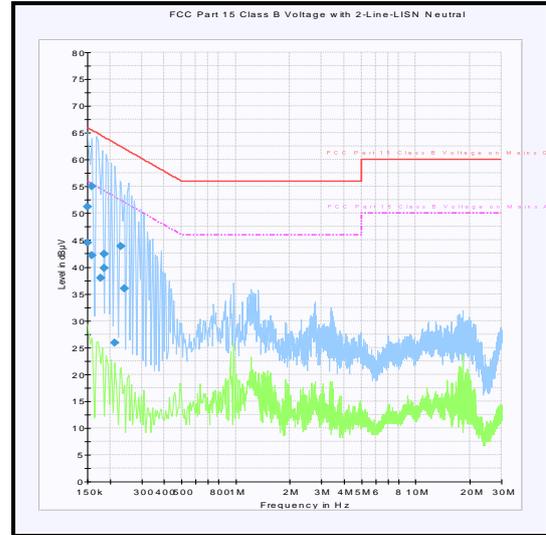

**Neutral**

*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*

**Test Equipment Used:**

| Asset No. | Instrument                       | Manufacturer    | Type No.   | Serial No.  | Date Calibration Due | Cal. Interval (Months) |
|-----------|----------------------------------|-----------------|------------|-------------|----------------------|------------------------|
| M1625     | Thermometer / Hygrometer station | JM Handelpunkt  | 30.5015.13 | None stated | 09 Jan 2014          | 12                     |
| A004      | LISN                             | Rohde & Schwarz | ESH3-Z5    | 890604/027  | 30 Oct 2014          | 12                     |
| A1830     | Pulse Limiter                    | Rohde & Schwarz | ESH3-Z2    | 100668      | 19 Feb 2014          | 12                     |
| MI263     | EMI Test Receiver                | Rohde & Schwarz | ESIB7      | 100265      | 09 Aug 2014          | 12                     |

**5.2.2. Receiver/Idle Mode Radiated Spurious Emissions****Test Summary:**

|                          |                 |                   |                |
|--------------------------|-----------------|-------------------|----------------|
| <b>Test Engineer:</b>    | Nick Jones      | <b>Test Date:</b> | 17th July 2013 |
| <b>Test Sample IMEI:</b> | 004402451269850 |                   |                |

|                           |                                    |
|---------------------------|------------------------------------|
| <b>FCC/ IC Reference:</b> | Part 15.109 / ICES 003 Section 6.2 |
| <b>Test Method Used:</b>  | ANSI C63.4-2009                    |
| <b>Frequency Range:</b>   | 30 MHz to 1000 MHz                 |

**Environmental Conditions:**

|                               |          |
|-------------------------------|----------|
| <b>Temperature (°C):</b>      | 26 to 23 |
| <b>Relative Humidity (%):</b> | 40       |


**Note(s):**

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. Measurements were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

**Results: Quasi Peak**

| Frequency (MHz) | Antenna Polarity | Level (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) | Result   |
|-----------------|------------------|----------------------|----------------------|-------------|----------|
| 30.072          | Vertical         | 25.8                 | 40.0                 | 14.2        | Complied |
| 37.616          | Vertical         | 31.2                 | 40.0                 | 8.8         | Complied |
| 48.125          | Vertical         | 19.5                 | 40.0                 | 20.5        | Complied |
| 73.328          | Vertical         | 19.4                 | 40.0                 | 20.6        | Complied |
| 88.928          | Vertical         | 14.7                 | 43.5                 | 28.8        | Complied |
| 108.241         | Vertical         | 5.3                  | 43.5                 | 38.2        | Complied |
| 136.206         | Vertical         | 20.3                 | 43.5                 | 23.2        | Complied |
| 951.157         | Vertical         | 22.7                 | 46.0                 | 23.3        | Complied |

**Receiver/Idle Mode Radiated Spurious Emissions (continued)**

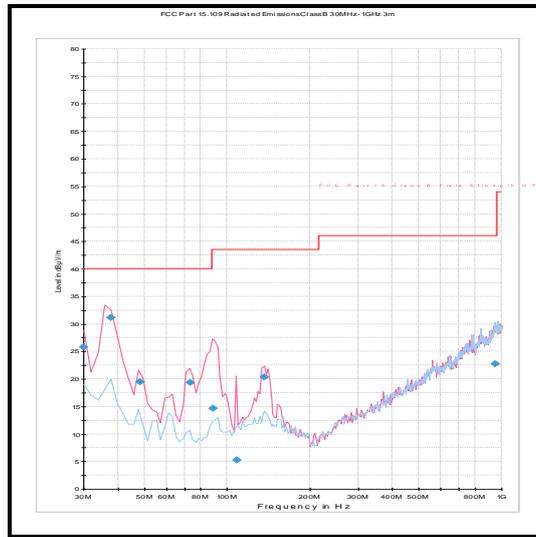

*Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.*

**Receiver/Idle Mode Radiated Spurious Emissions (continued)****Test Summary:**

|                          |                 |                   |                |
|--------------------------|-----------------|-------------------|----------------|
| <b>Test Engineer:</b>    | Nick Jones      | <b>Test Date:</b> | 17th July 2013 |
| <b>Test Sample IMEI:</b> | 004402451269850 |                   |                |

|                          |                                     |
|--------------------------|-------------------------------------|
| <b>FCC Reference:</b>    | Part 15.109                         |
| <b>Test Method Used:</b> | As detailed in ANSI C63.4 Section 8 |
| <b>Frequency Range:</b>  | 1 GHz to 5 GHz                      |

**Environmental Conditions:**

|                               |          |
|-------------------------------|----------|
| <b>Temperature (°C):</b>      | 26 to 23 |
| <b>Relative Humidity (%):</b> | 40       |



**Note(s):**

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above. The peak level was compared to the average limit as opposed to being compared to the peak limit.
3. Measurements were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

**Results:**

| <b>Frequency (MHz)</b> | <b>Antenna Polarity</b> | <b>Peak Level (dB<math>\mu</math>V/m)</b> | <b>Average Limit (dB<math>\mu</math>V/m)</b> | <b>Margin (dB)</b> | <b>Result</b> |
|------------------------|-------------------------|---|--|--------------------|---------------|
| 1967.935               | Vertical                | 48.6                                      | 54   | 5.4                | Complied      |

**Receiver/Idle Mode Radiated Spurious Emissions (continued)**

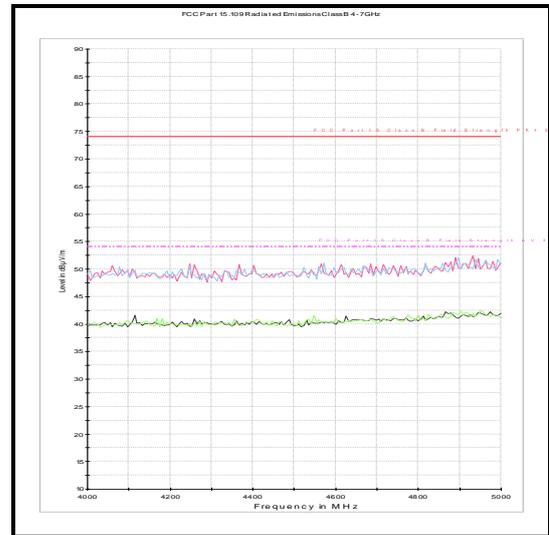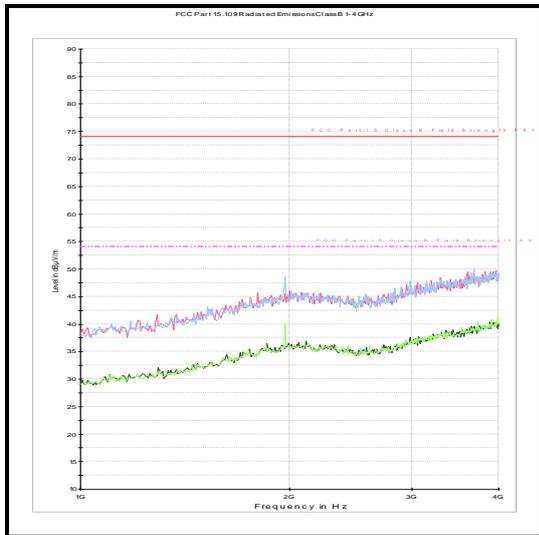

**Test Equipment Used:**

| Asset No. | Instrument                       | Manufacturer    | Type No.   | Serial No.  | Date Calibration Due | Cal. Interval (Months) |
|-----------|----------------------------------|-----------------|------------|-------------|----------------------|------------------------|
| M1622     | Thermometer / Hygrometer station | JM Handelspunkt | 30.5015.13 | None stated | 24 May 2014          | 12                     |
| K0001     | 5m RSE Chamber                   | Rainford EMC    | N/A        | N/A         | 24 Oct 2014          | 12                     |
| G0543     | Amplifier                        | Sonoma          | 310N       | 230801      | 05 Oct 2013          | 12                     |
| A1834     | Attenuator                       | Hewlett Packard | 8491B      | 10444       | 27 Jan 2014          | 12                     |
| A490      | Antenna                          | Chase           | CBL6111A   | 1590        | 18 Apr 2014          | 12                     |

## **6. Measurement Uncertainty**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

| <b>Measurement Type</b>         | <b>Range</b>       | <b>Confidence Level (%)</b> | <b>Calculated Uncertainty</b> |
|---------------------------------|--------------------|-----------------------------|-------------------------------|
| AC Conducted Spurious Emissions | 0.15 MHz to 30 MHz | 95%                         | ±4.69 dB                      |
| Radiated Spurious Emissions     | 30 MHz to 1 GHz    | 95%                         | ±5.65 dB                      |
| Radiated Spurious Emissions     | 1 GHz to 5 GHz     | 95%                         | ±4.37 dB                      |

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## **7. Report Revision History**

| <b>Version Number</b> | <b>Revision Details</b> |               |                 |
|-----------------------|-------------------------|---------------|-----------------|
|                       | <b>Page No(s)</b>       | <b>Clause</b> | <b>Details</b>  |
| 1.0                   | -                       | -             | Initial Version |