

FCC/IC RF Test Report


APPLICANT : Sony Mobile Communications AB
EQUIPMENT : Smart phone
BRAND NAME : SONY
MODEL NAME : D2306
TYPE NAME : PM-0723-BV
FCC ID : PY7PM-0723
IC : 4170B-PM0723
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
IC RSS-132 issue 3, RSS-133 issue 6, and RSS-139 Issue 2
IC RSS-GEN issue 3
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Nov. 15, 2013 and testing was completed on Dec. 28, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : PY7PM-0723

IC : 4170B-PM0723

Page Number : 1 of 193

Report Issued Date : Jan. 24, 2014

Report Version : Rev. 01

TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	7
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
1.7 Testing Site.....	7
1.8 Applied Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	12
2.3 Support Unit used in test configuration and system.....	12
2.4 Measurement Results Explanation Example	12
3 TEST RESULT	13
3.1 Conducted Output Power Measurement.....	13
3.2 Peak-to-Average Ratio	16
3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	32
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	38
3.5 Band Edge Measurement.....	62
3.6 Conducted Spurious Emission Measurement.....	77
3.7 Field Strength of Spurious Radiation Measurement	141
3.8 Frequency Stability Measurement.....	185
4 LIST OF MEASURING EQUIPMENT	191
5 UNCERTAINTY OF EVALUATION	193



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG3N1535A	Rev. 01	Initial issue of report	Jan. 24, 2014

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	RSS-132 (5.4) RSS-133 (6.4) RSS-139 (6.4)	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d) §27.50(d)(5)	RSS-132 (5.4) RSS-133(6.4) RSS-139 (6.4)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.3	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.3	§27.50(d)(4)	RSS-139 (6.4) SRSP-513(5.1.2)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.4	§2.1049 §22.917(a) §24.238(b) §27.53(g)	RSS-GEN(4.6.1) RSS-133(6.5) RSS-139 (6.5)	99% and 26dB Occupied Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a) §27.53(g)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a) §27.53(g)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Conducted Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a) §27.53(g)	RSS-GEN(4.9) RSS-132 (5.5) RSS-133 (6.5) RSS-139 (6.5)	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 12.50 dB at 3707.000 MHz
3.8	§2.1055 §22.355 §24.235 §27.54	RSS-GEN(4.7) RSS-132 (5.3) RSS-133 (6.3) RSS-139 (6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

1 General Description

1.1 Applicant

Sony Mobile Communications AB
Nya Vattentorget, 22188 Lund, Sweden

1.2 Manufacturer

Compal Communications, INC.
No. 385, Yangguang Street, Neihu, Taipei 11491, Taiwan

1.3 Feature of Equipment Under Test

The Equipment Under Test (hereafter called: EUT) is smart phone supporting, GSM / WCDMA / LTE / Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n, Bluetooth with FM Receiver, GPS, and NFC features, and below is details of information.

Product Feature	
Equipment	Smart phone
Brand Name	SONY
Model Name	D2306
Type Name	PM-0723-BV
FCC ID	PY7PM-0723
IC	4170B-PM0723
GSM Operating Band(s)	GSM 850/900/1800/1900MHz
GPRS / EGPRS Multi Slot Class	GPRS Class 33 , EGPRS Class 33
WCDMA Operating Band(s)	FDD Band I / II / IV / V
WCDMA Rel. Version	Rel. 8
LTE Operating Band(s)	FDD Band IV / VII / XVII
Wi-Fi Specification	802.11b/g/n (HT20) 802.11a/n (HT20/HT40)
Bluetooth Version	v3.0 + EDR / v4.0 - LE
NFC Specification	ISO14443A / ISO14443B / Felica
Power Supply	Battery / AC Adapter / Car Charger

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
Maximum Output Power to Antenna	GSM850 : 33.56 dBm GSM1900 : 30.35 dBm WCDMA Band V : 24.44 dBm WCDMA Band IV : 24.33 dBm WCDMA Band II : 24.66 dBm
Antenna Type	PIFA Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink)
EUT Serial Number	IMEI : 004402451650745 S/N : 468191316BB
HW Version	A
SW Version	18.0.C.0.30
EUT Stage	Production Unit

Accessory List	
AC Adapter	Model No. : EP800
	Type No. : CAA-0002016-US B
Battery	Model No. : LIS1502ERPC
	Type No. : LIS1502ERPC
Earphone	Model No. : MH410c
	Type No. : AG-1100
USB Cable	Model No. : AHAB EC450
	Part No. : 1242-6715.4

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GPRS class 8	GMSK	0.72	0.05 ppm	248KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.19	0.05 ppm	250KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.08	0.02 ppm	4M18F9W
Part 24	GSM1900 GPRS class 8	GMSK	0.93	0.05 ppm	248KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.27	0.04 ppm	250KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.19	0.01 ppm	4M18F9W
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK	0.19	0.02 ppm	4M18F9W

1.7 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH07-HY	722060/4086B-1

1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01
- ♦ IC RSS-132 Issue 3
- ♦ IC RSS-133 Issue 6
- ♦ IC RSS-139 Issue 2
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. Per the section 2.2.3 of Notice of 2012-DRS0126, " Receivers Excluded from Industry Canada Requirements", only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

- a. Preliminary tests were performed in different radio applications and recorded the RF output power in the following table:

Conducted Power		Burst Average Power (dBm)					
Band		GSM850			GSM1900		
Channel		128	189	251	512	661	810
Frequency (MHz)		824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM		33.53	33.50	33.46	30.03	30.20	30.24
GPRS Class 8		33.56	33.52	33.50	30.27	30.31	30.35
GPRS Class 10		33.46	33.44	33.43	30.26	30.31	30.34
GPRS Class 11		33.38	33.35	33.30	30.20	30.27	30.25
GPRS Class 33		33.23	33.22	33.20	29.90	30.14	30.15
EGPRS Class 8		27.16	27.10	27.06	25.81	25.84	25.87
EGPRS Class 10		27.11	27.00	26.97	25.70	25.79	25.84
EGPRS Class 11		26.89	26.87	26.85	25.60	25.65	25.67
EGPRS Class 33		26.79	26.69	26.63	25.40	25.50	25.51
DTM 5	GSM (GMSK, 1 Tx slot)	33.42	33.40	33.36	30.12	30.31	30.33
	GPRS (GMSK, 1 Tx slot)	33.34	33.33	33.29	30.06	30.24	30.26
DTM 9	GSM (GMSK, 1 Tx slot)	33.34	33.33	33.27	30.09	30.30	30.32
	GPRS (GMSK, 1 Tx slot)	33.31	33.25	33.20	30.02	30.24	30.27
DTM 11	GSM (GMSK, 1 Tx slot)	33.29	33.25	33.23	30.00	30.20	30.22
	GPRS (GMSK, 2 Tx slots)	33.22	33.18	33.15	29.94	30.11	30.15
DTM 5	GSM (GMSK, 1 Tx slot)	27.26	27.23	27.20	26.10	26.18	26.19
	EDGE (8PSK, 1 Tx slot)	26.34	26.33	26.36	25.54	25.61	25.62
DTM 9	GSM (GMSK, 1 Tx slot)	27.28	27.25	27.21	26.08	26.19	26.22
	EDGE (8PSK, 1 Tx slot)	26.31	26.34	26.40	25.41	25.50	25.52
DTM 11	GSM (GMSK, 1 Tx slot)	27.26	27.22	27.13	25.94	26.02	26.04
	EDGE (8PSK, 2 Tx slots)	26.27	26.28	26.35	25.38	25.46	25.48



Conducted Power	Burst Average Power (dBm)								
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency (MHz)	826.4	836.4	846.6	1852.4	1880.0	1907.6	1712.4	1732.6	1752.6
RMC 12.2K	24.44	24.28	24.31	24.33	24.17	24.04	24.47	24.66	24.48
HSDPA Subtest-1	23.47	23.34	22.70	23.34	23.12	23.09	23.50	23.60	23.55
HSDPA Subtest-2	23.48	23.34	22.98	23.33	23.19	23.11	23.57	23.76	23.58
HSDPA Subtest-3	22.96	22.95	22.27	22.86	22.68	22.62	23.02	23.14	23.05
HSDPA Subtest-4	23.00	22.91	22.54	22.87	22.72	22.63	23.03	23.20	23.11
HSUPA Subtest-1	23.28	23.14	22.84	22.98	23.11	23.02	23.05	23.62	23.19
HSUPA Subtest-2	22.30	22.24	21.86	22.03	22.10	21.60	22.14	22.45	22.24
HSUPA Subtest-3	22.18	22.21	21.95	21.70	21.35	21.82	22.41	22.58	21.95
HSUPA Subtest-4	22.83	22.40	22.31	22.50	22.46	22.57	22.85	22.91	22.56
HSUPA Subtest-5	23.47	23.40	22.97	23.34	23.12	23.06	23.55	23.59	23.54

- b. During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT was rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS class 8 Link ■ EDGE class 8 Link	■ GPRS class 8 Link ■ EDGE class 8 Link
GSM 1900	■ GPRS class 8 Link ■ EDGE class 8 Link	■ GPRS class 8 Link ■ EDGE class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Note:

1. The maximum power levels are GPRS multi-slot class 8 mode for GMSK link, EDGE multi-slot class 8 mode for 8PSK link, RMC 12.2Kbps mode for WCDMA band V, RMC 12.2Kbps mode for WCDMA band IV, and RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.
2. Because there are individual antennas for each WWAN, WLAN, and Bluetooth, the co-location test modes are not required.

2.2 Connection Diagram of Test System

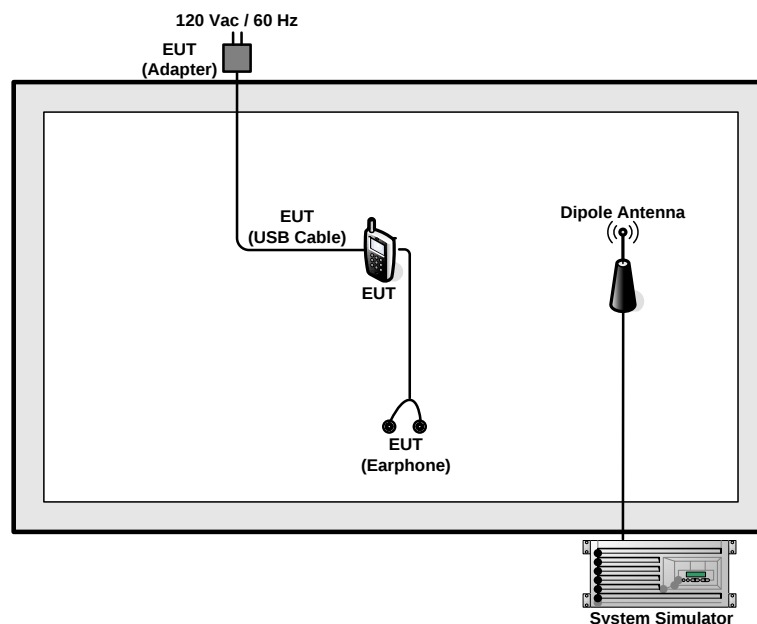

2.3 Support Unit used in test configuration and system

Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for GSM and WCDMA modes.

3.1.4 Test Setup

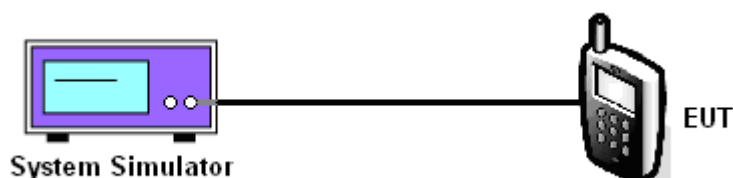

3.1.5 Test Result of Conducted Output Power

Cellular Band									
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	33.56	33.52	33.50	27.16	27.10	27.06	24.44	24.28	24.31
Conducted Power (Watts)	2.27	2.25	2.24	0.52	0.51	0.51	0.28	0.27	0.27

PCS Band									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	30.27	30.31	30.35	25.81	25.84	25.87	24.33	24.17	24.04
Conducted Power (Watts)	1.06	1.07	1.08	0.38	0.38	0.39	0.27	0.26	0.25

AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Conducted Power (dBm)	24.47	24.66	24.48
Conducted Power (Watts)	0.28	0.29	0.28

Note: maximum burst average power for GSM, and maximum average power for WCDMA.

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and System Simulator via power divider.
2. For GSM/EGPRS operating modes:
 - a. Set EUT in maximum power output.
 - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector in spectrum analyzer for first trace.
 - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector in spectrum analyzer for second trace.
 - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator synchronized with the spectrum analyzer.
3. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.2.4 Test Setup

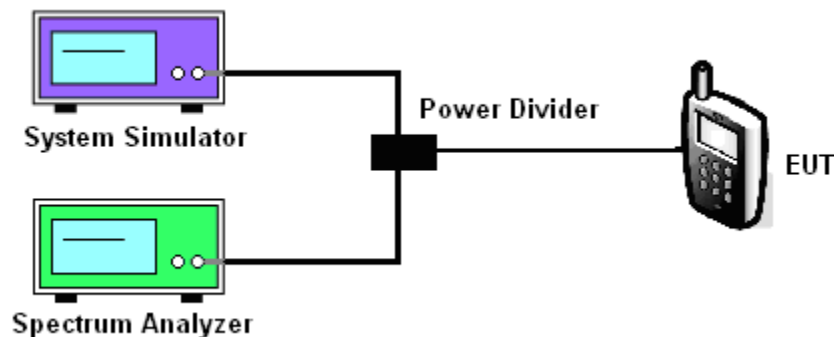

3.2.5 Test Result of Peak-to-Average Ratio

Cellular Band									
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Peak-to-Average Ratio (dB)	0.33	0.37	0.40	2.19	2.18	2.30	2.68	2.88	3.04

PCS Band									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.30	0.27	0.30	2.43	2.46	2.17	2.60	2.68	2.48


AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
Peak-to-Average Ratio (dB)	2.16	2.56	1.84




3.2.6 Test Result (Plots) of Peak-to-Average Ratio

Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

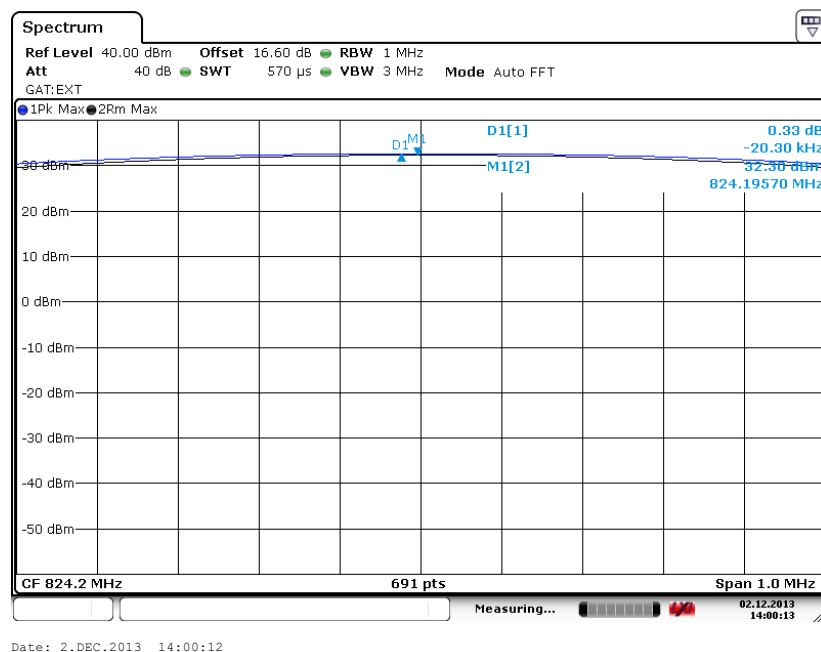


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

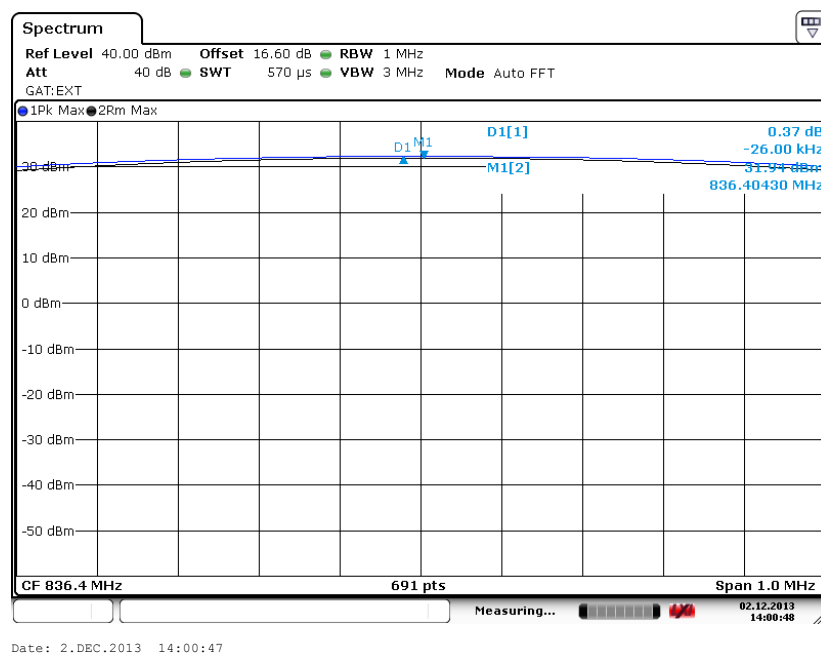



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

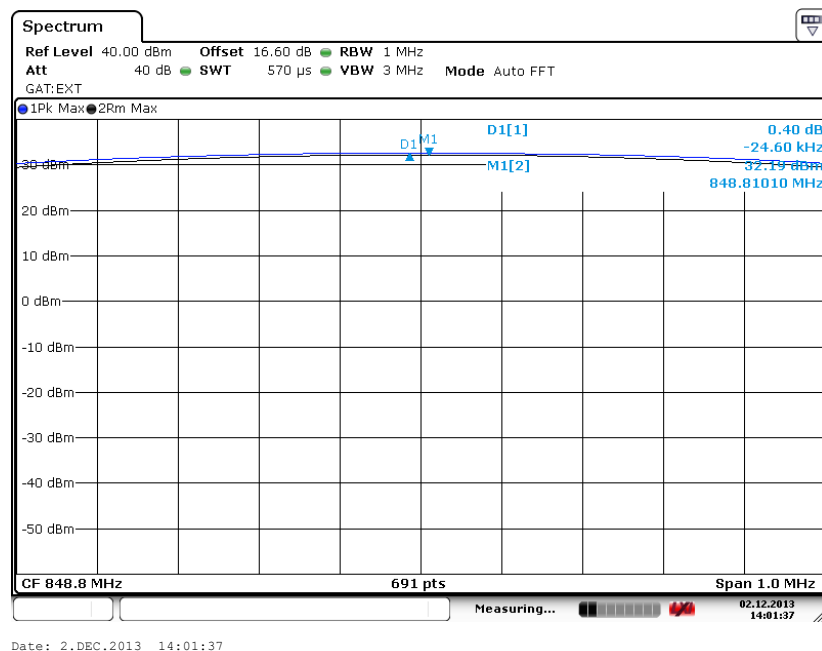


Note: The total loss is 16.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

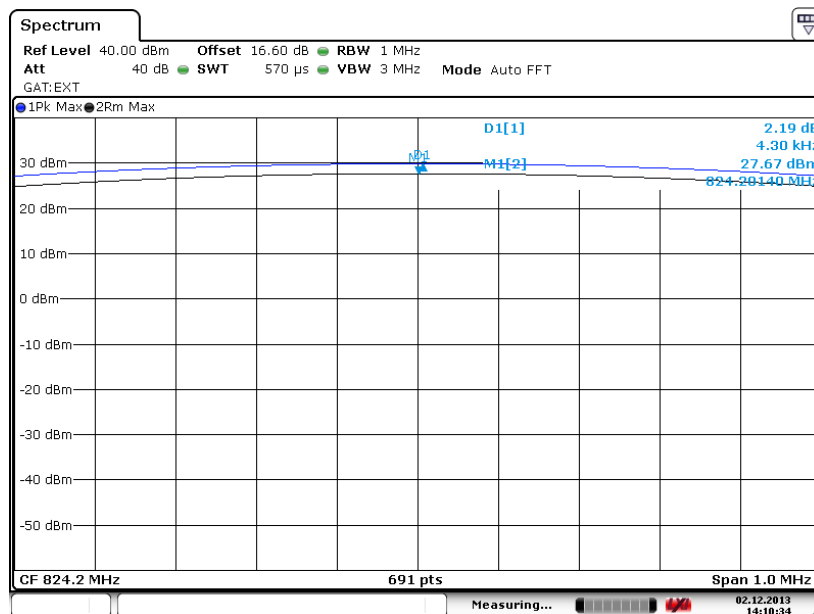

Date: 2.DEC.2013 14:10:33


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

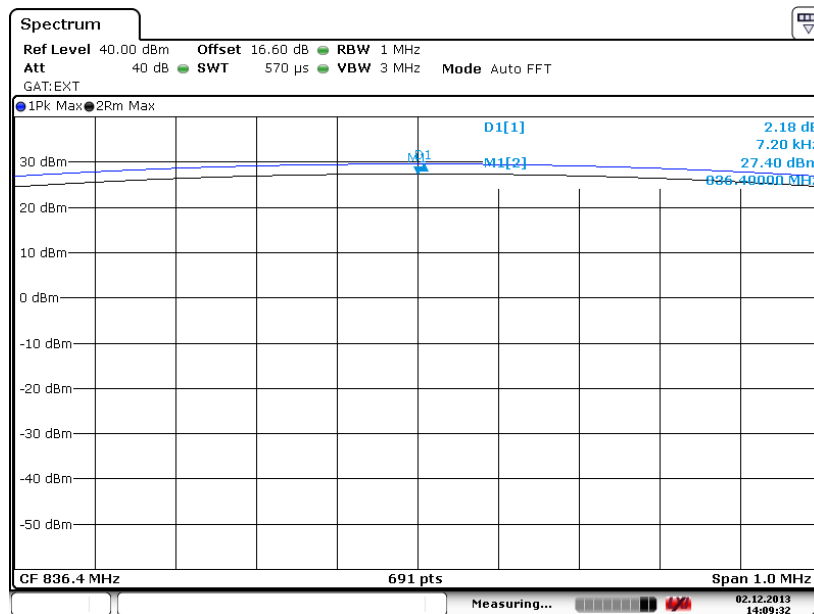

Date: 2.DEC.2013 14:09:32



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

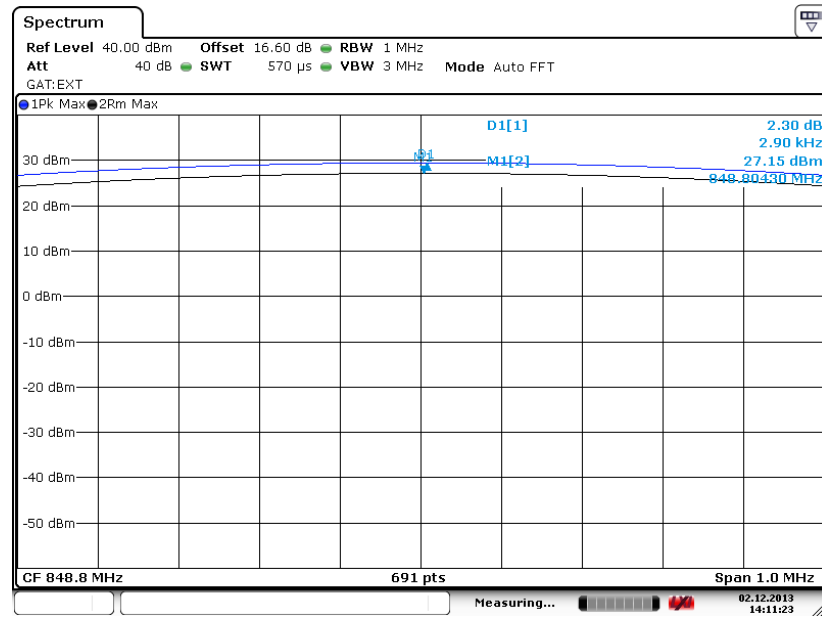


Date: 2.DEC.2013 14:11:23

Note: The total loss is 16.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

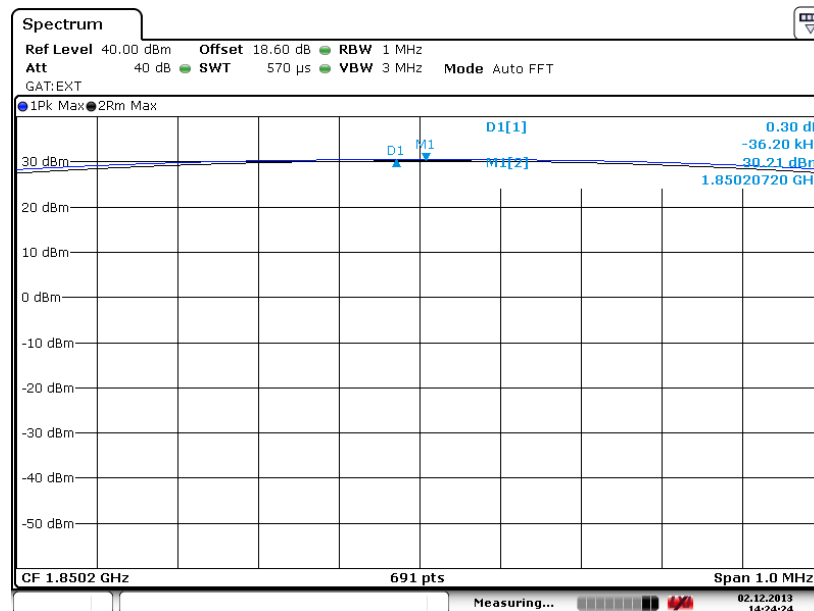

Date: 2.DEC.2013 14:24:23


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

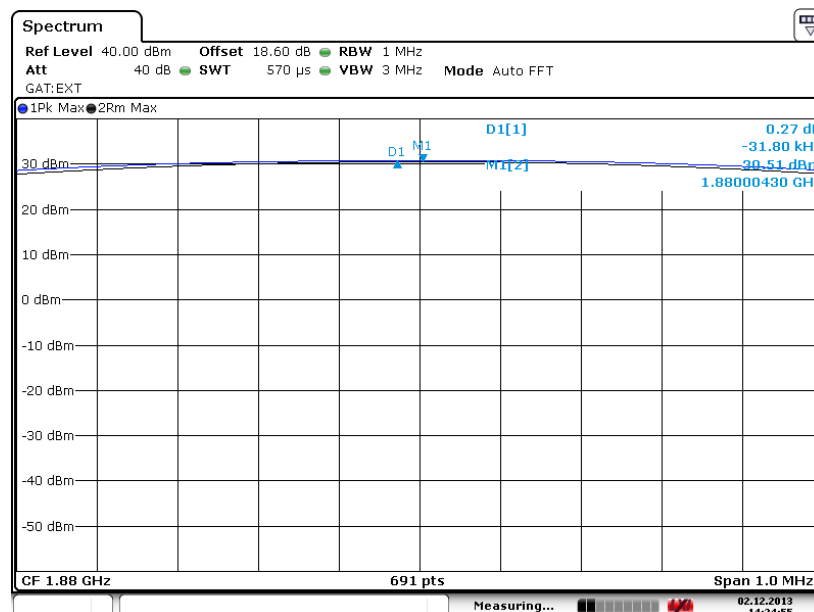

Date: 2.DEC.2013 14:24:55



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

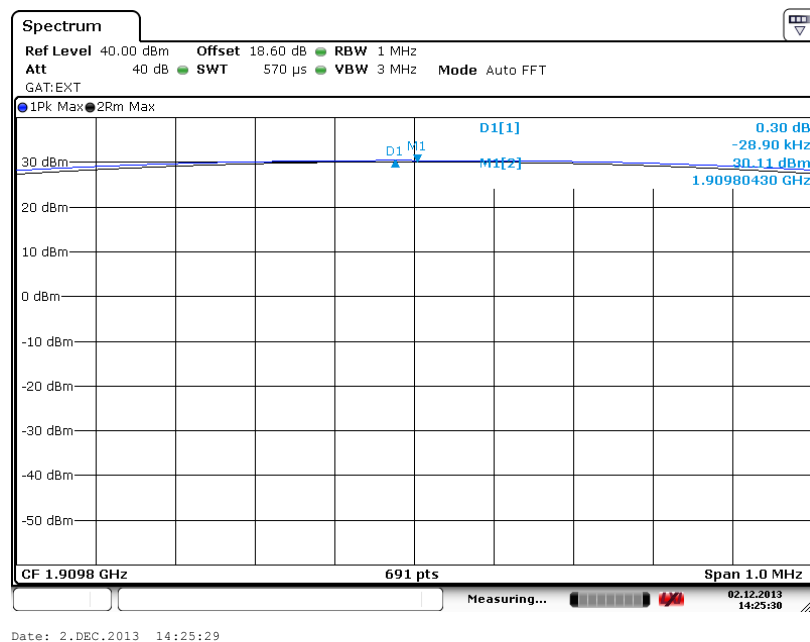


Note: The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

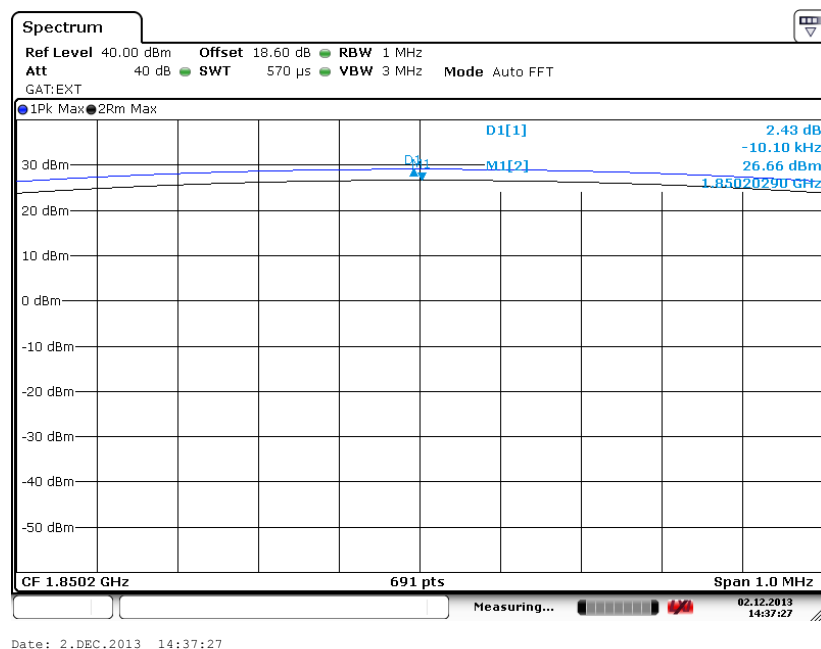


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

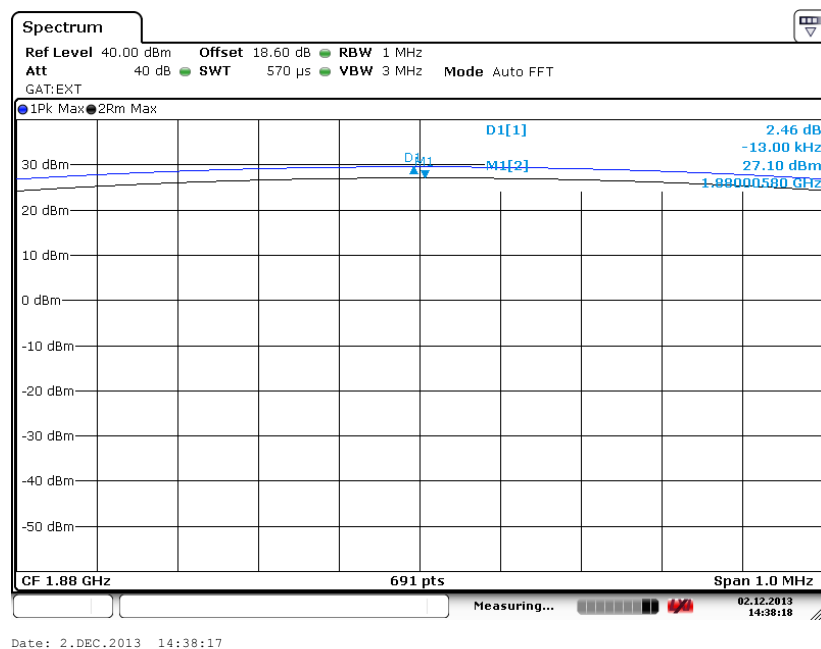



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

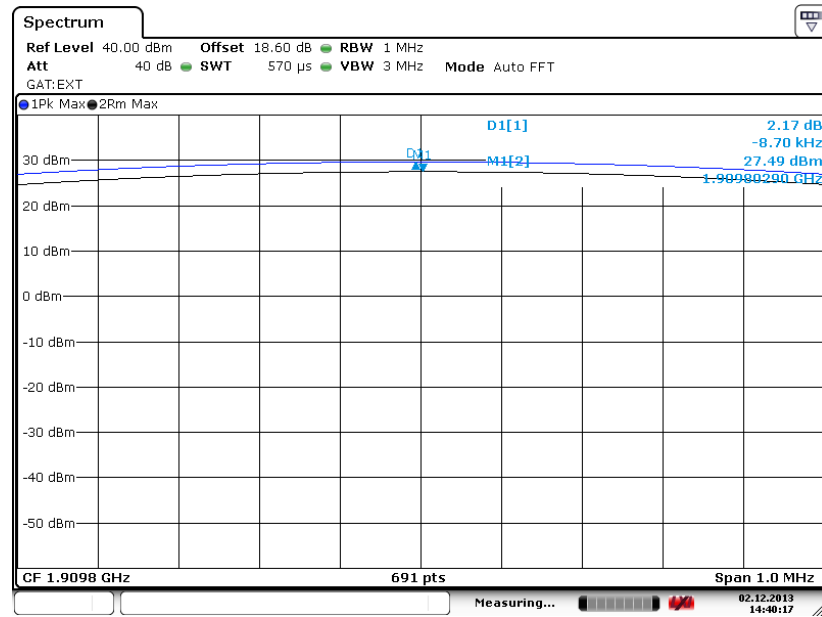


Date: 2.DEC.2013 14:40:17

Note: The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

Peak-to-Average Ratio on Channel 4132 (826.4 MHz)

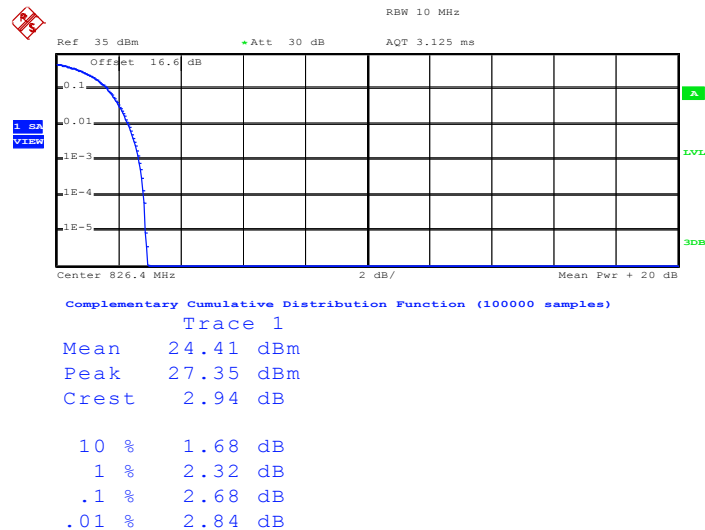

Date: 2.DEC.2013 12:45:29


Peak-to-Average Ratio on Channel 4182 (836.4 MHz)

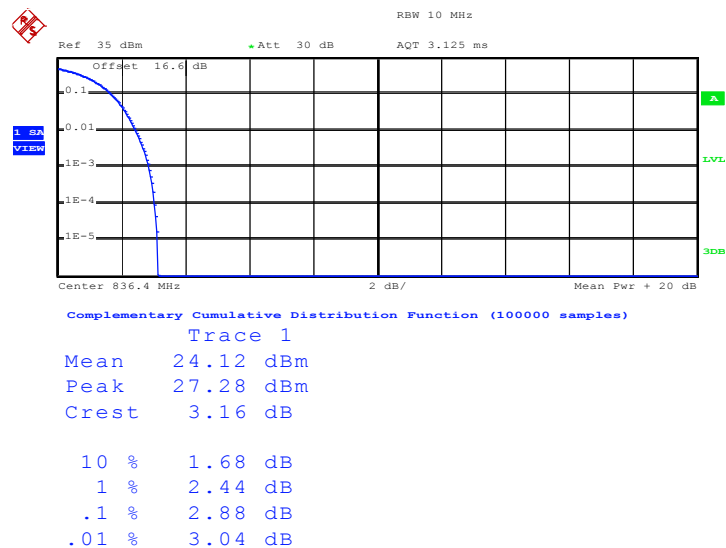

Date: 2.DEC.2013 12:44:56



Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

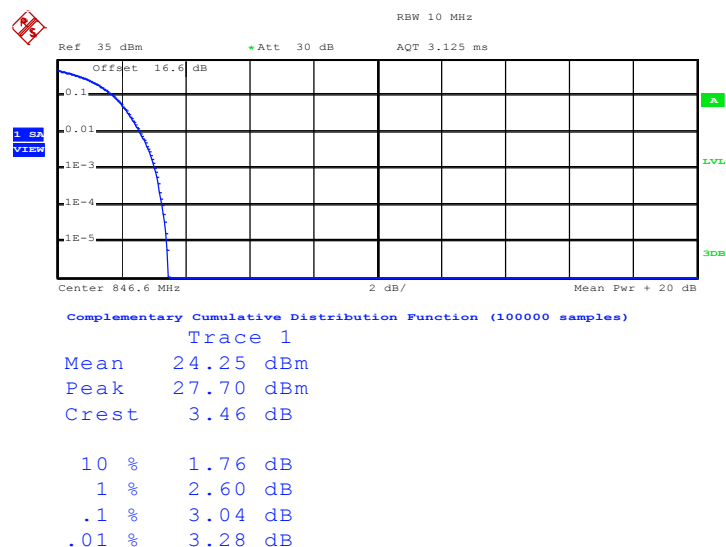


Date: 2.DEC.2013 12:44:15

Note: The total loss is 16.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Peak-to-Average Ratio on Channel 1312 (1712.4 MHz)

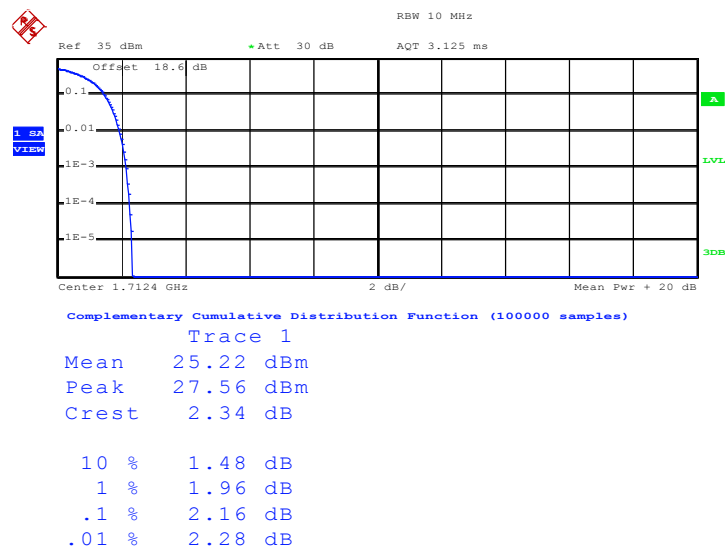

Date: 2.DEC.2013 11:27:14


Peak-to-Average Ratio on Channel 1413 (1732.6 MHz)

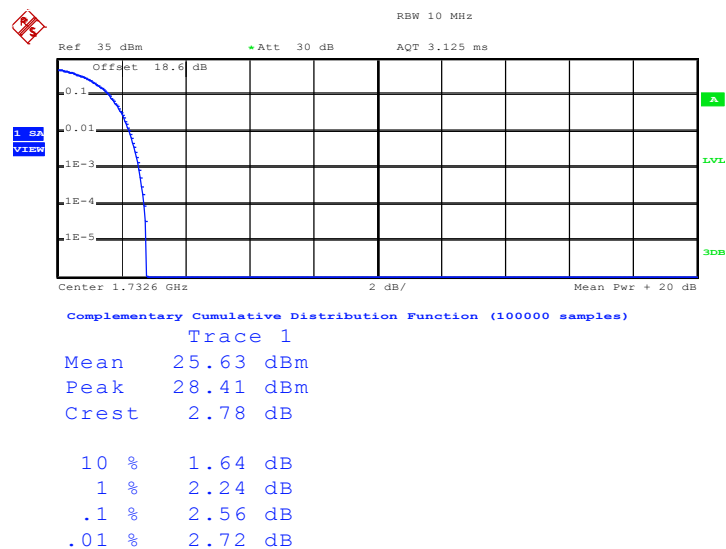

Date: 2.DEC.2013 11:28:06



Peak-to-Average Ratio on Channel 1513 (1752.6 MHz)

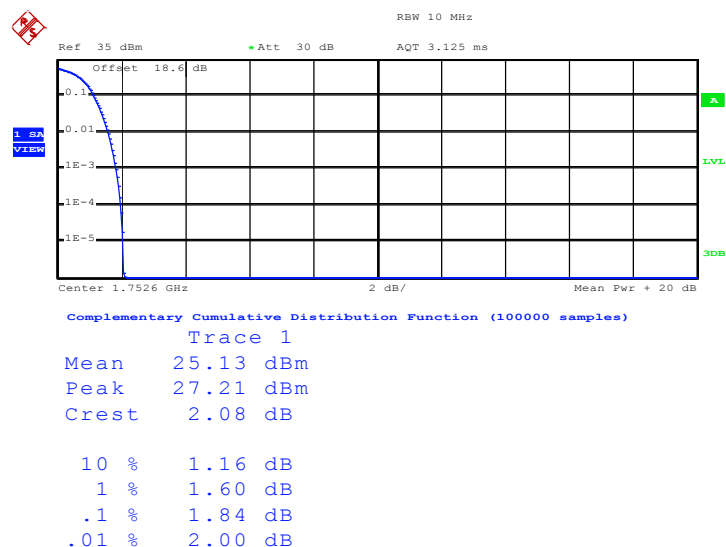


Date: 2.DEC.2013 11:28:38

Note: The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

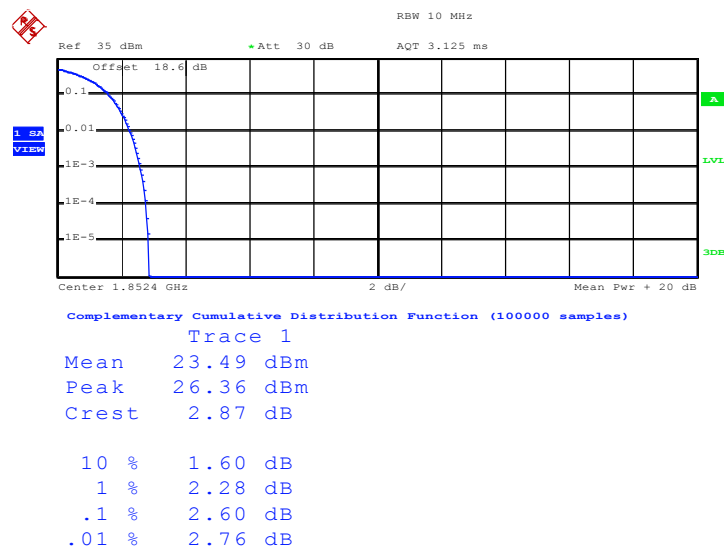

Date: 2.DEC.2013 11:10:50


Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

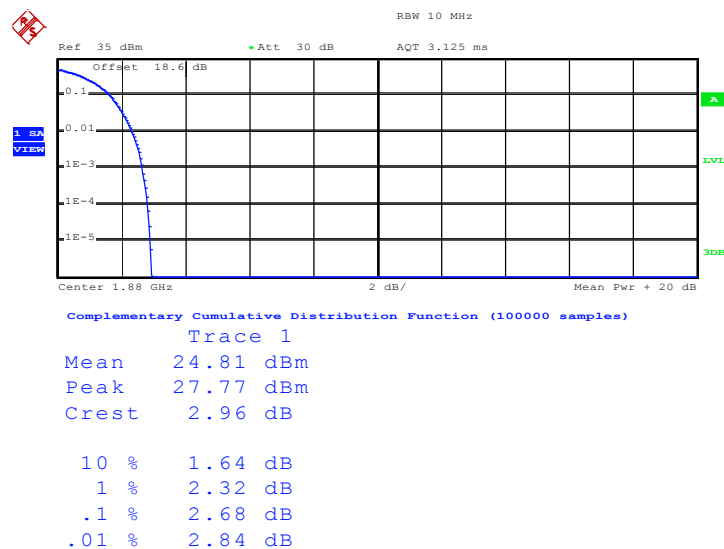

Date: 2.DEC.2013 11:12:31



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

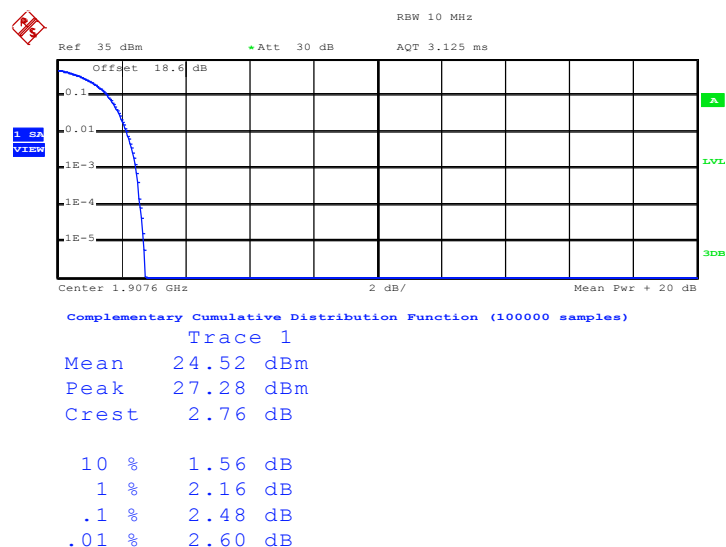

Date: 2.DEC.2013 11:12:54

Note: The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v01. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band) and 1 Watts (AWS Band).


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was placed on an non-conductive rotating platform with 0.8 meter height in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW= 1MHz, VBW= 3MHz for GSM, RBW= 100 kHz, VBW= 300 kHz, used channel power option with bandwidth=5MHz for WCDMA, and RMS detector settings per section 4.0 of KDB 971168 D01.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. The highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

3.3.4 Test Setup

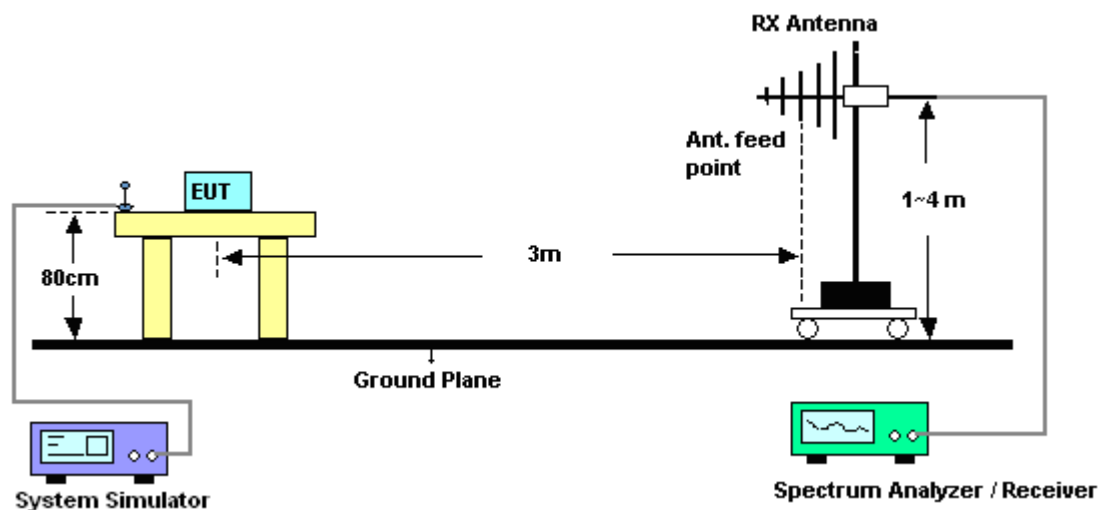

3.3.5 Test Result of ERP

GSM850 (GPRS class 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-2.39	31.54	27.00	0.50
836.4	-1.82	32.04	28.07	0.64
848.8	-1.85	32.59	28.59	0.72
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-15.14	32.93	15.64	0.04
836.4	-14.09	32.82	16.58	0.05
848.8	-13.70	33.62	17.77	0.06

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

GSM850 (EDGE class 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-6.81	31.54	22.58	0.18
836.4	-7.13	32.04	22.76	0.19
848.8	-7.67	32.59	22.77	0.19
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-18.99	32.93	11.79	0.02
836.4	-18.76	32.82	11.91	0.02
848.8	-19.55	33.62	11.92	0.02

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.4	-10.88	31.44	18.41	0.07
836.4	-11.78	32.04	18.11	0.06
846.6	-11.65	32.63	18.83	0.08
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.4	-19.35	32.78	11.28	0.01
836.4	-19.53	32.82	11.14	0.01
846.6	-18.53	33.4	12.72	0.02

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

3.3.6 Test Result of EIRP

GSM1900 (GPRS class 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-15.28	43.69	28.41	0.69
1880.0	-15.10	44.79	29.69	0.93
1909.8	-15.35	43.59	28.24	0.67
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-26.20	45.72	19.52	0.09
1880.0	-27.67	46.78	19.11	0.08
1909.8	-22.52	46.77	24.25	0.27

* EIRP = LVL (dBm) + Correction Factor (dB)

GSM1900 (EDGE class 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-19.56	43.69	24.13	0.26
1880.0	-20.50	44.79	24.29	0.27
1909.8	-19.59	43.59	24.00	0.25
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-30.16	45.72	15.56	0.04
1880.0	-31.11	46.78	15.67	0.04
1909.8	-25.99	46.77	20.78	0.12

* EIRP = LVL (dBm) + Correction Factor (dB)

WCDMA Band IV (RMC 12.2Kbps) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1712.4	-21.13	41.74	20.61	0.12
1732.6	-20.36	42.41	22.05	0.16
1752.6	-19.08	41.82	22.74	0.19
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1712.4	-24.18	43.38	19.20	0.08
1732.6	-25.54	45.43	19.89	0.10
1752.6	-24.76	44.43	19.67	0.09

* EIRP = LVL (dBm) + Correction Factor (dB)

WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.4	-24.24	43.69	19.45	0.09
1880.0	-21.93	44.79	22.86	0.19
1907.6	-22.03	43.59	21.56	0.14
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.4	-32.88	45.72	12.84	0.02
1880.0	-34.54	46.78	12.24	0.02
1907.6	-31.17	46.77	15.60	0.04

* EIRP = LVL (dBm) + Correction Factor (dB)

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

4. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
5. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
6. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold.
7. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

3.4.4 Test Setup

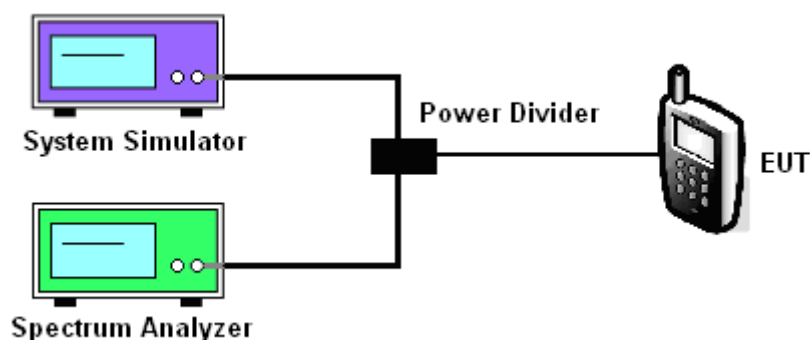

3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (kHz)	248.00	244.00	242.00	250.00	246.00	244.00
26dB BW (kHz)	304.00	314.00	314.00	302.00	310.00	290.00

PCS Band						
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (kHz)	248.00	248.00	246.00	240.00	244.00	250.00
26dB BW (kHz)	306.00	318.00	312.00	298.00	300.00	310.00

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.16	4.12	4.18
26dB BW (MHz)	4.66	4.68	4.68


AWS Band			
Modes	WCDMA Band IV (RMC 12.2Kbps)		
Channel	1312(Low)	1413 (Mid)	1513 (High)
Frequency (MHz)	1712.4	1732.6	1752.6
99% OBW (MHz)	4.18	4.18	4.14
26dB BW (MHz)	4.68	4.68	4.68

PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.18	4.18	4.18
26dB BW (MHz)	4.68	4.66	4.68

3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
---------------	---------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

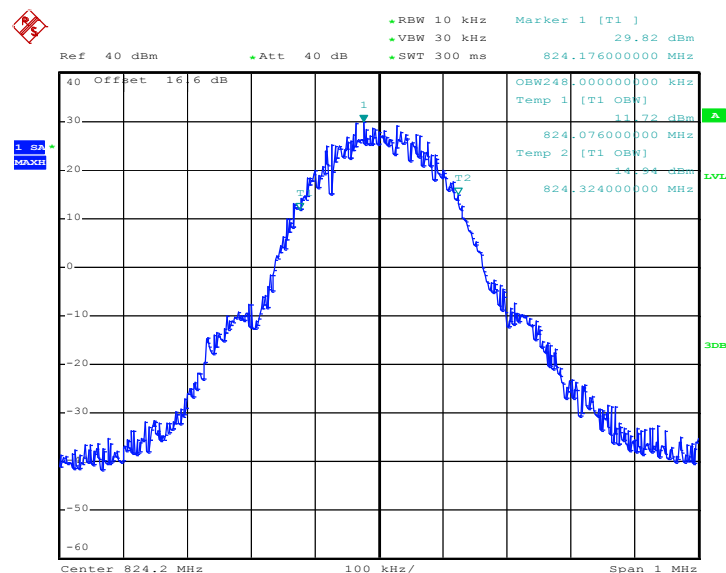

Date: 1.DEC.2013 17:15:22


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

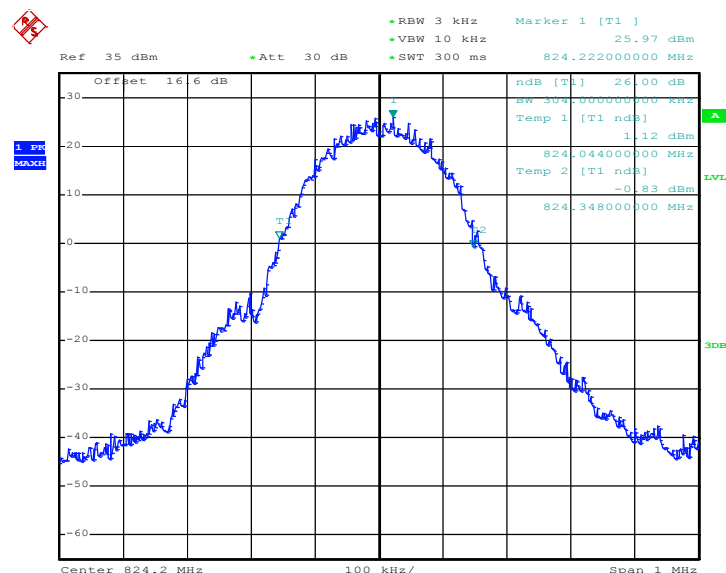

Date: 1.DEC.2013 17:02:58




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

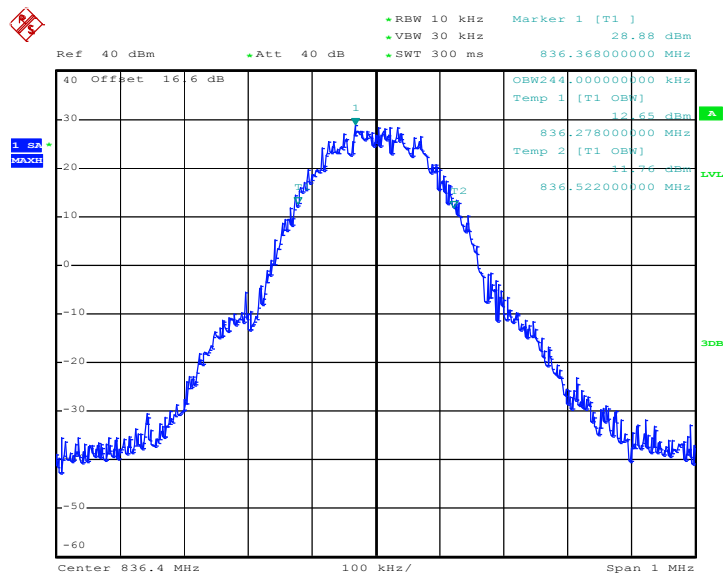

Date: 1.DEC.2013 17:15:51


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

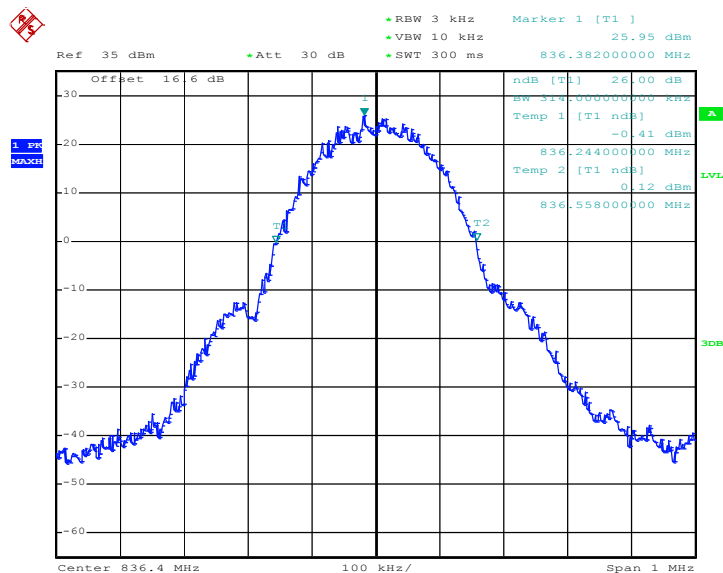

Date: 1.DEC.2013 17:03:28




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

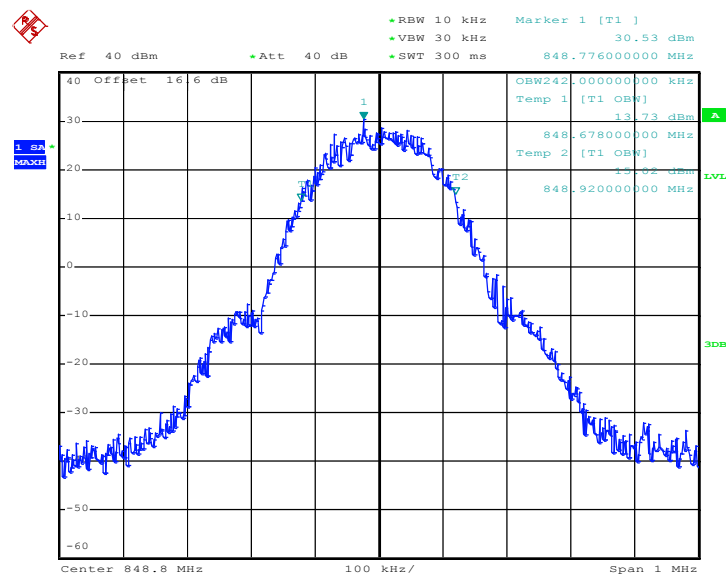

Date: 1.DEC.2013 17:16:21

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

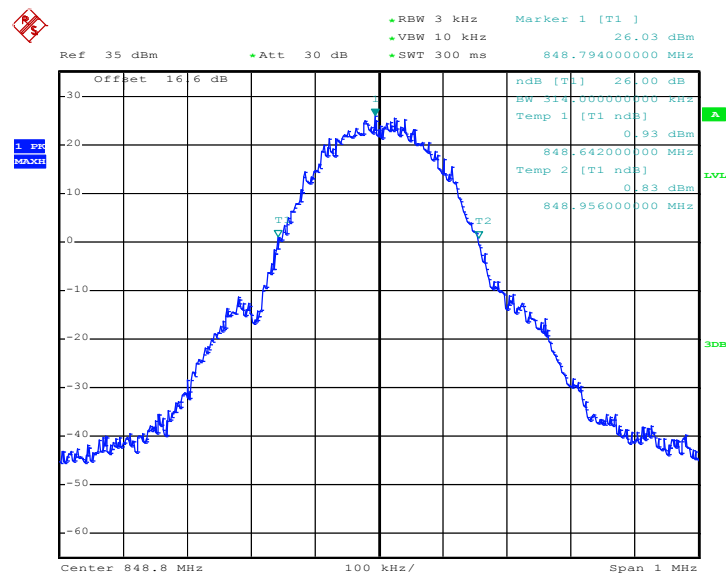


Date: 1.DEC.2013 17:03:58

Note: The total loss is 16.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

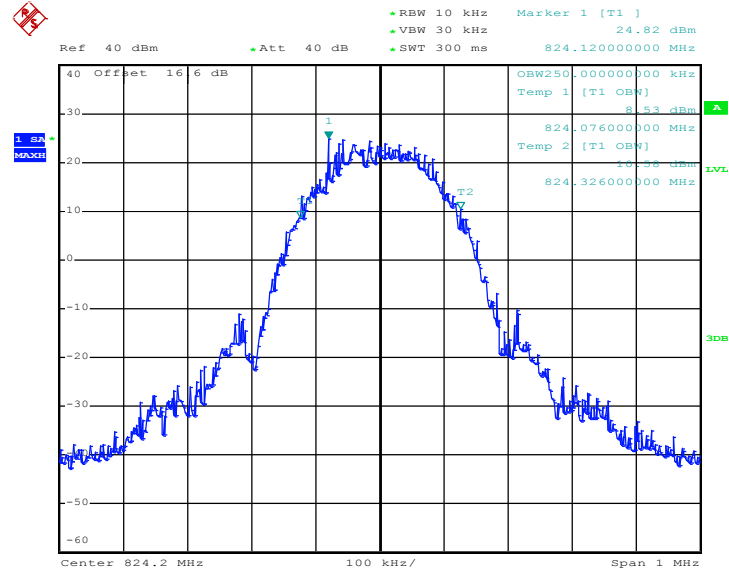

Date: 1.DEC.2013 17:50:31


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

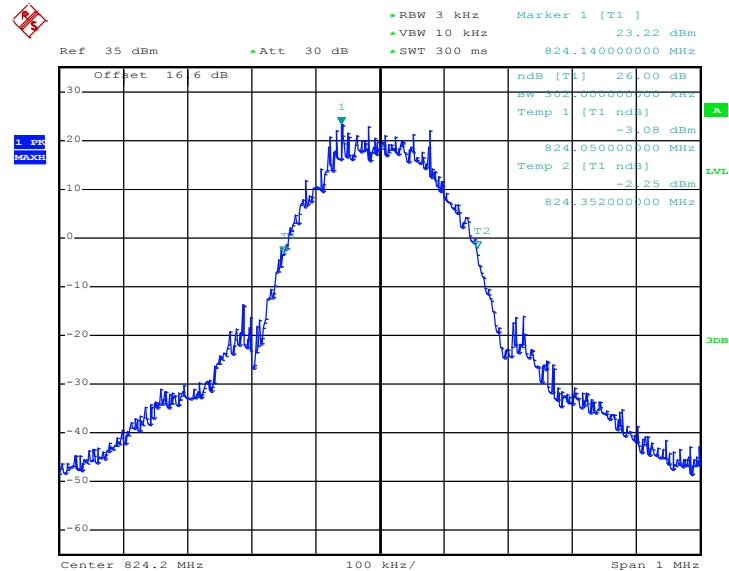

Date: 1.DEC.2013 18:10:26




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

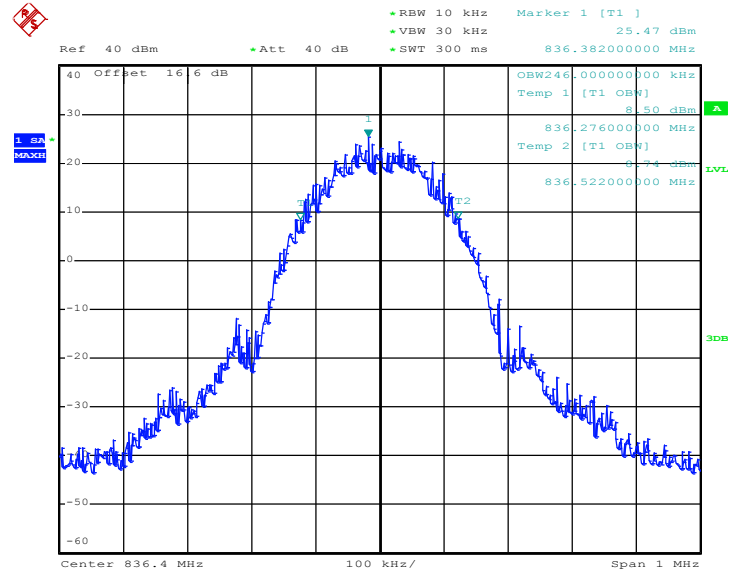

Date: 1.DEC.2013 17:45:23


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

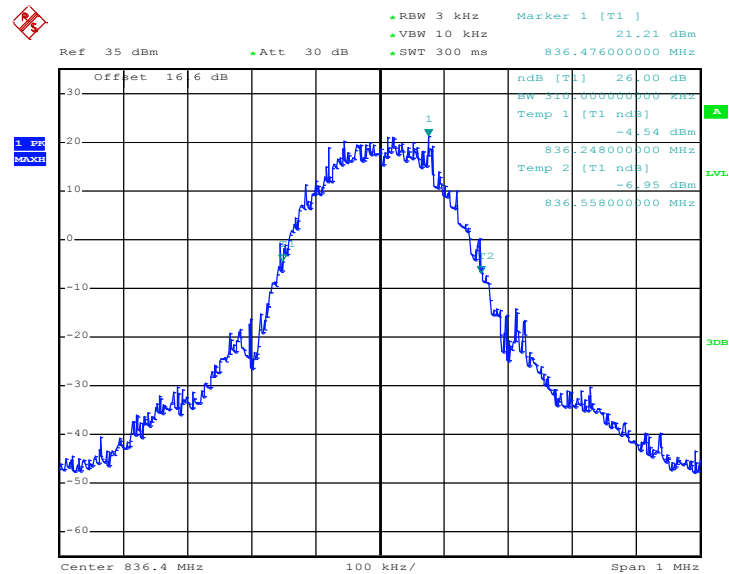

Date: 1.DEC.2013 18:10:56




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

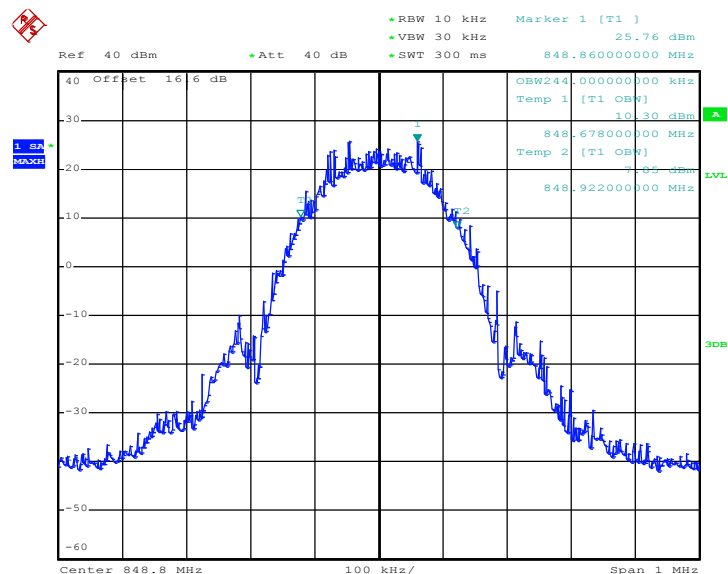

Date: 1.DEC.2013 17:49:00

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

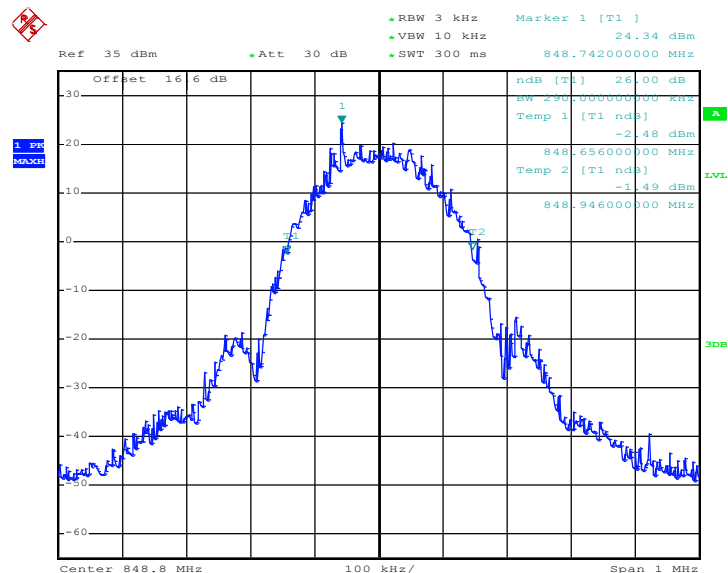


Date: 1.DEC.2013 18:11:26

Note: The total loss is 16.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

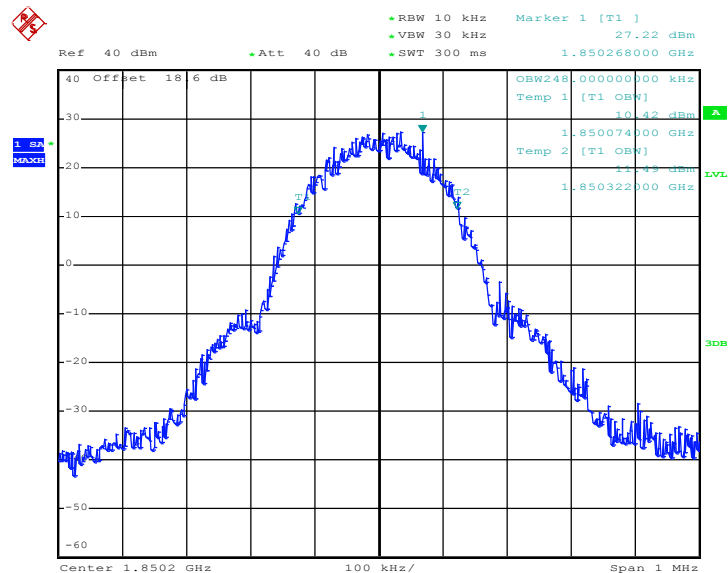

Date: 1.DEC.2013 18:23:24


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

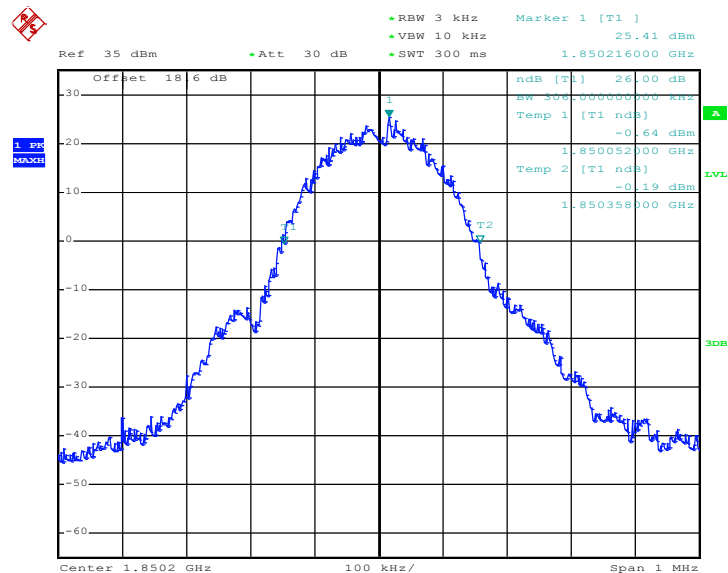

Date: 1.DEC.2013 18:21:12




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

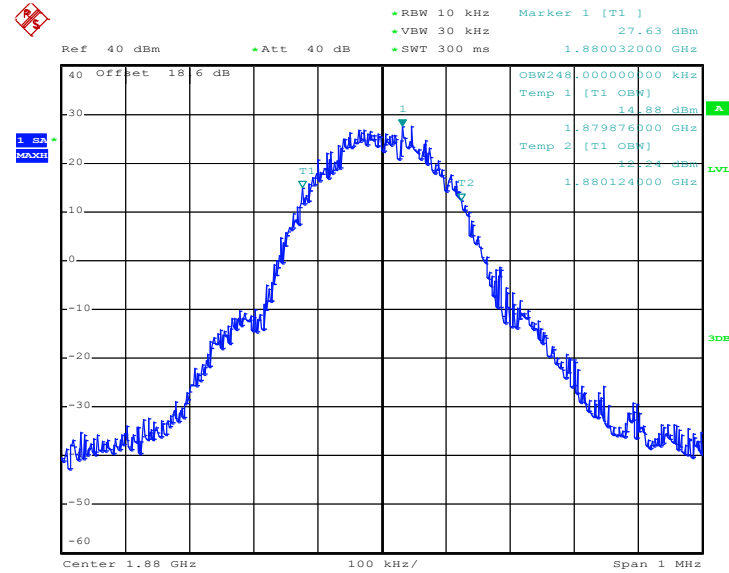

Date: 1.DEC.2013 18:23:54


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

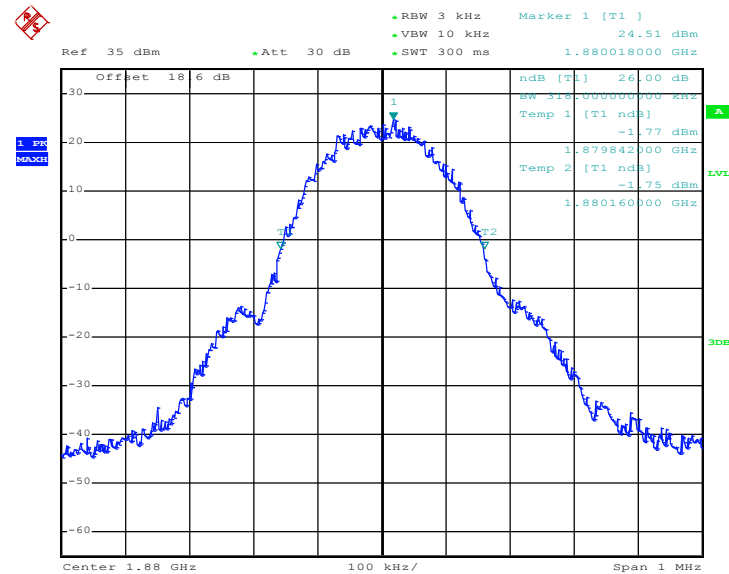

Date: 1.DEC.2013 18:21:42




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

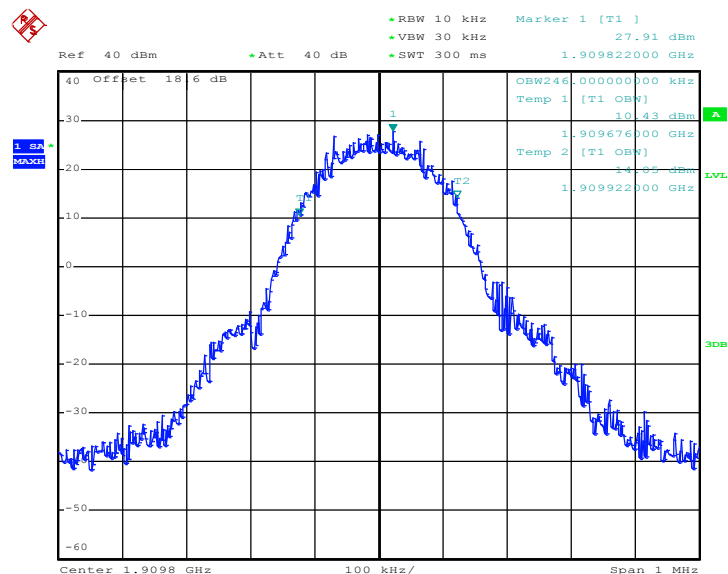

Date: 1.DEC.2013 18:28:32


26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

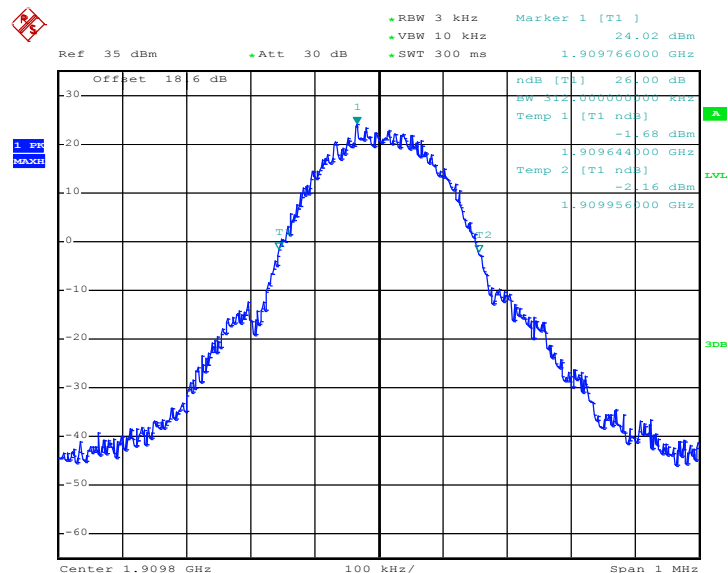


Date: 1.DEC.2013 18:22:12

Note: The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
---------------	-----------------	--------------------	---------------------------------

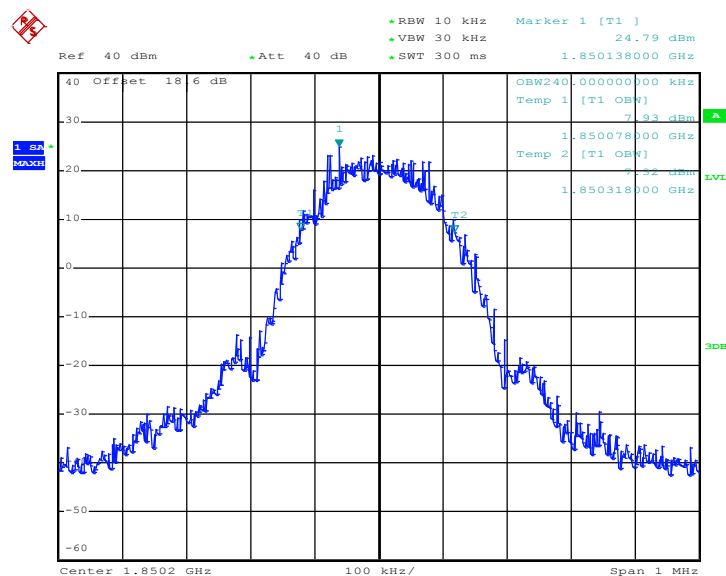99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)


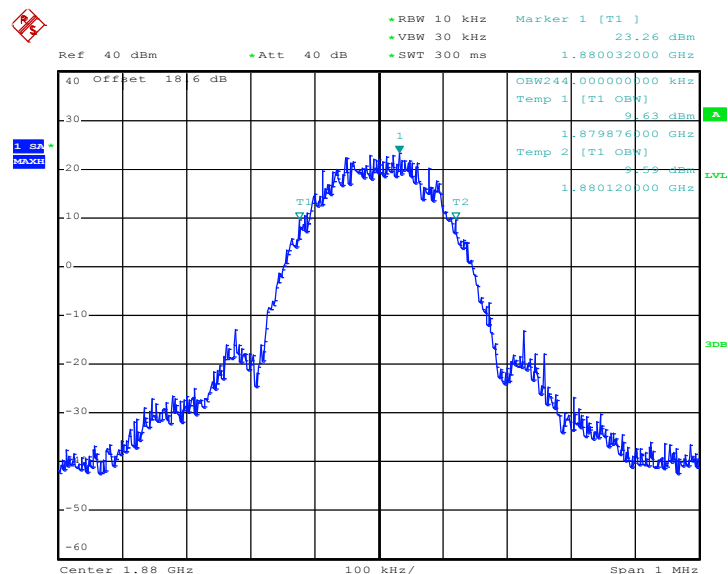
Date: 1.DEC.2013 18:37:58

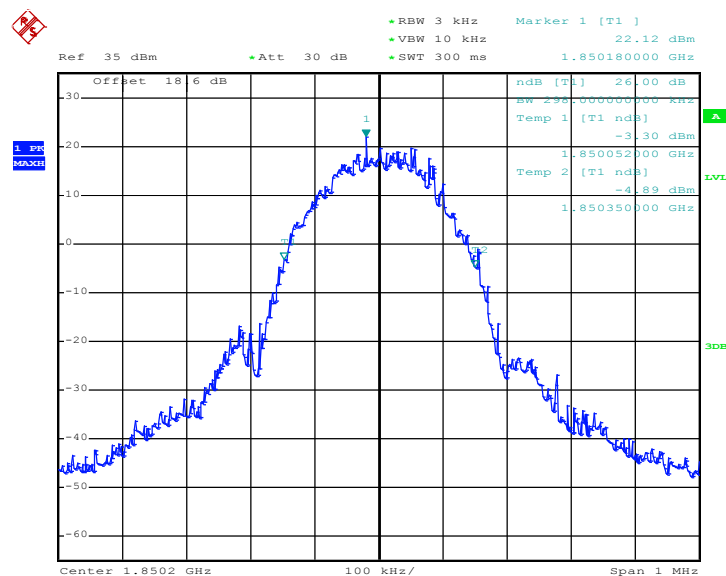26dB Bandwidth Plot on Channel 512 (1850.2 MHz)


Date: 1.DEC.2013 18:36:10




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)




Date: 1.DEC.2013 18:40:37

26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

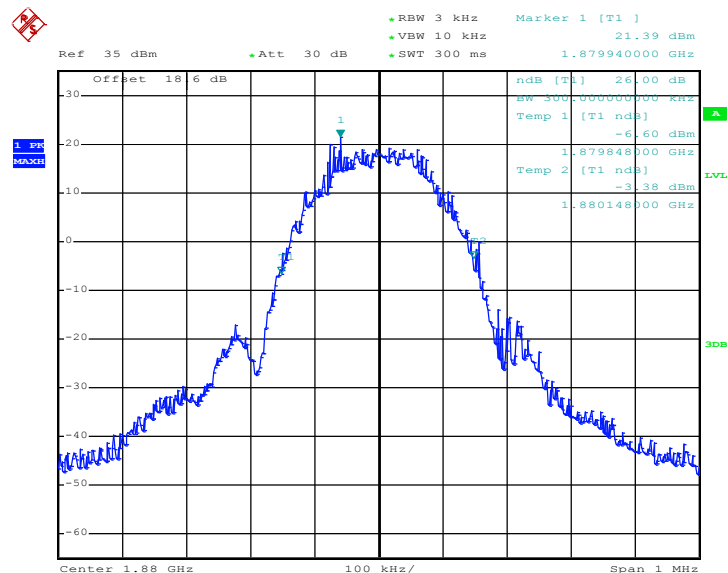


Date: 1.DEC.2013 18:36:40

99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

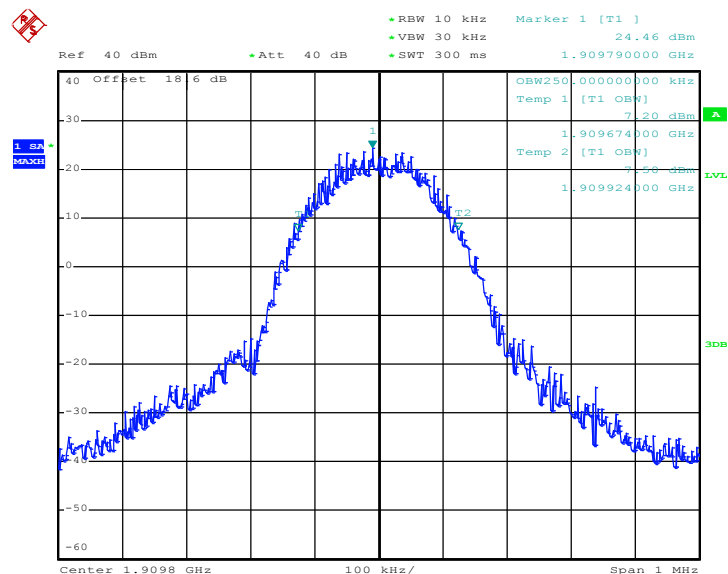

Date: 1.DEC.2013 18:41:07

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

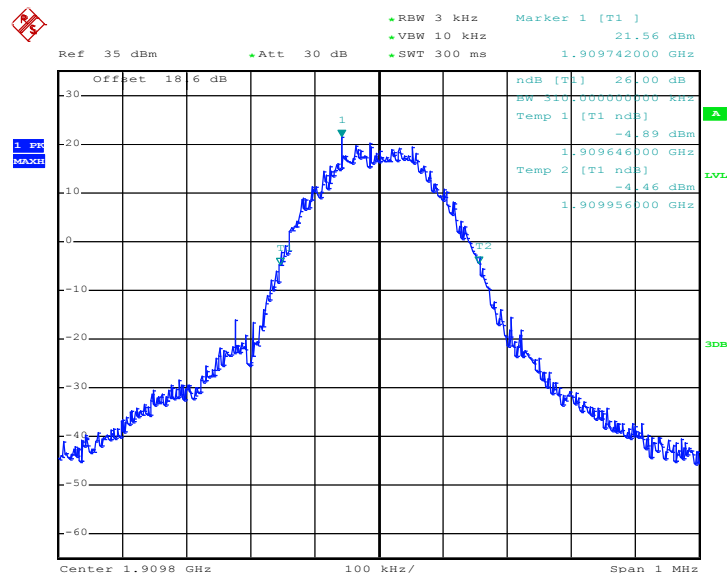


Date: 1.DEC.2013 18:37:10

Note: The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

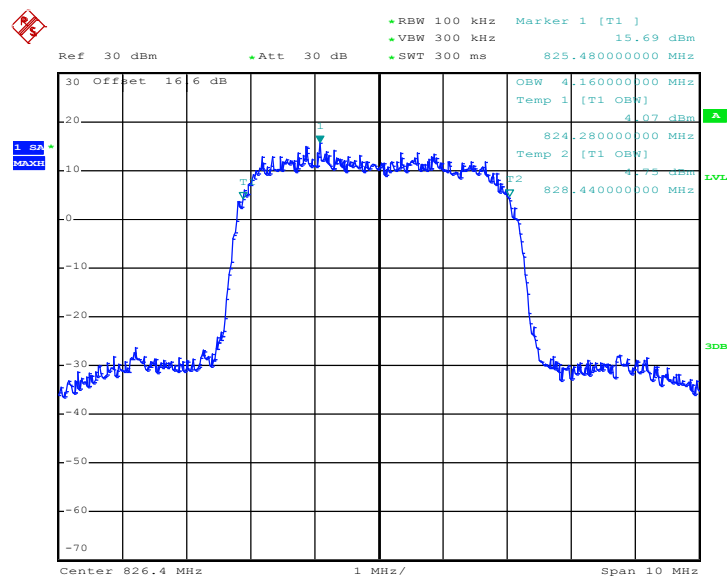

Date: 2.DEC.2013 11:45:54


26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

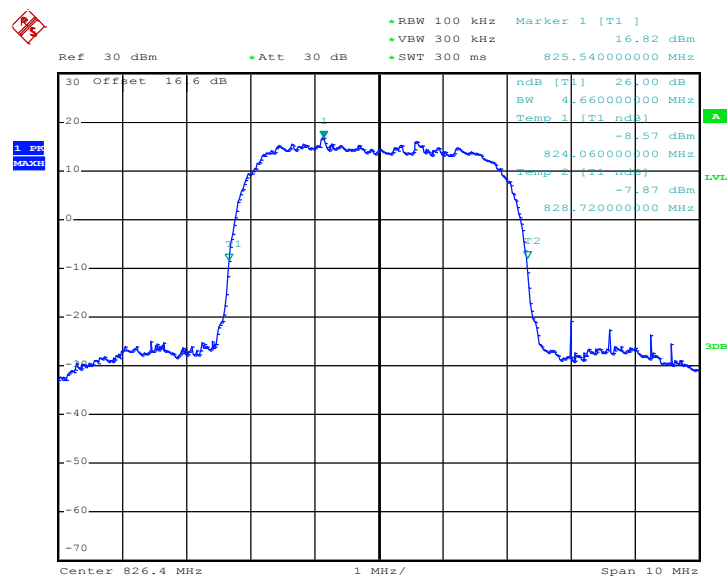

Date: 2.DEC.2013 11:44:10




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

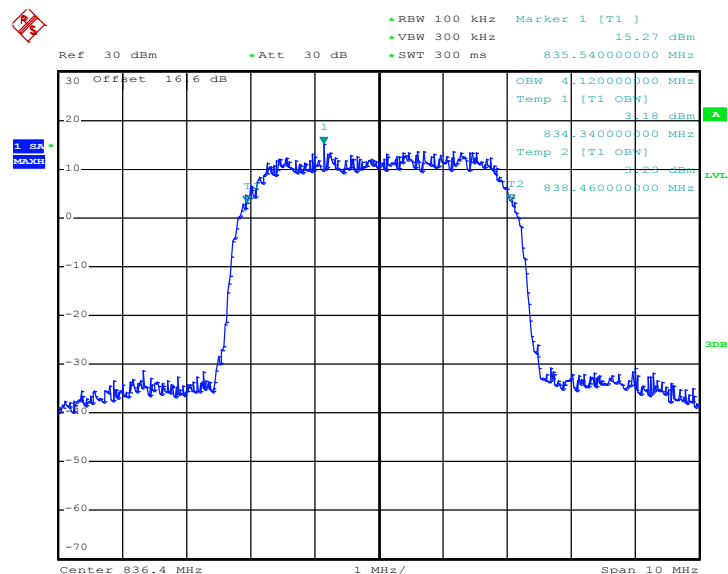

Date: 2.DEC.2013 11:46:23


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

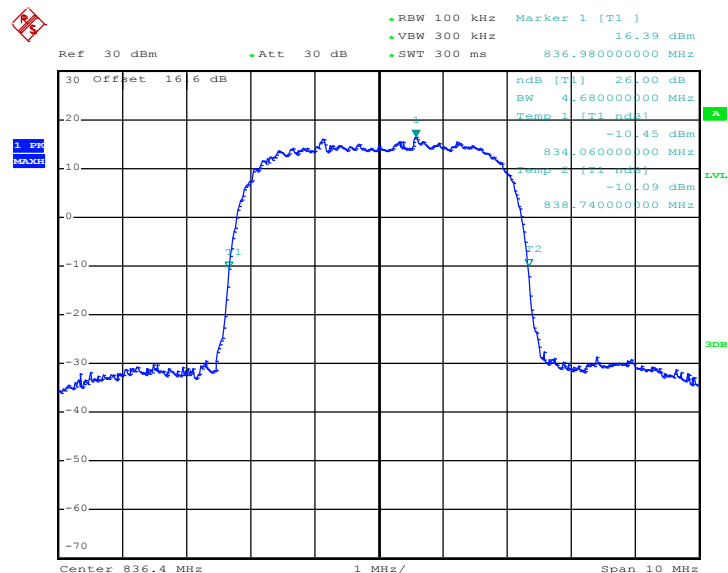

Date: 2.DEC.2013 11:44:40




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

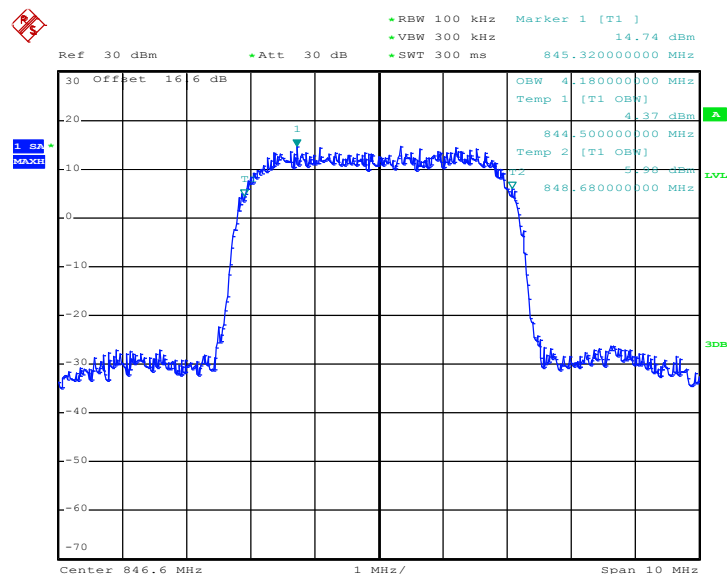

Date: 2.DEC.2013 11:46:53


26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

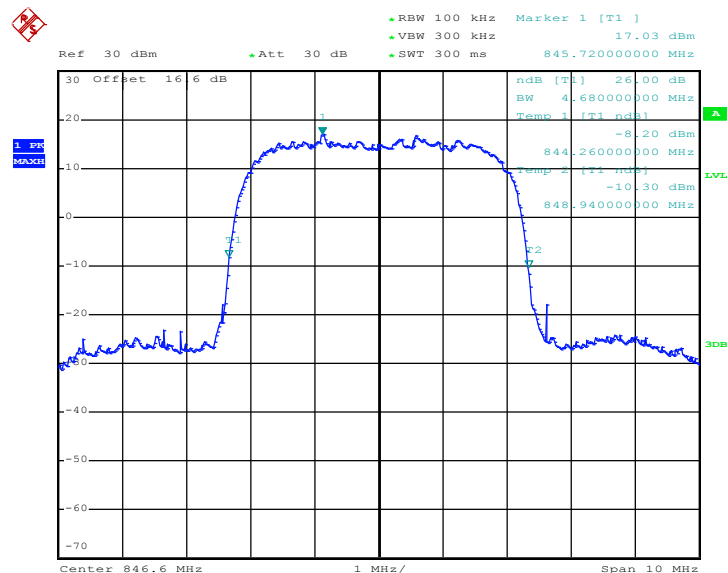


Date: 2.DEC.2013 11:45:09

Note: The total loss is 16.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

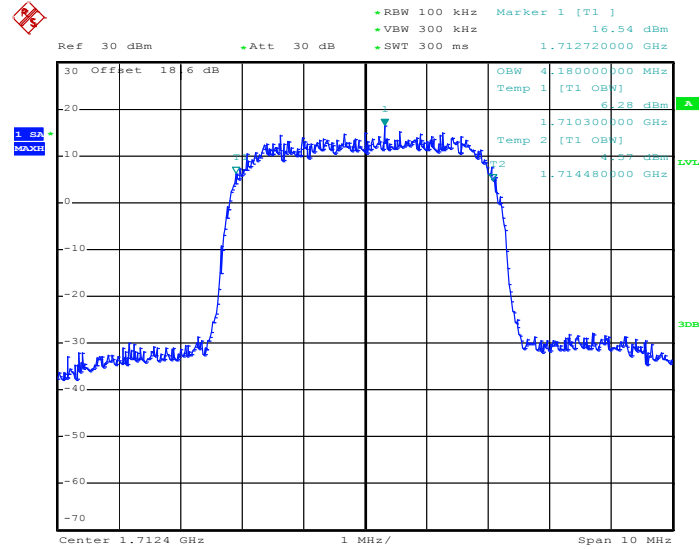
99% Occupied Bandwidth Plot on Channel 1312 (1712.4 MHz)


Date: 2.DEC.2013 11:18:54

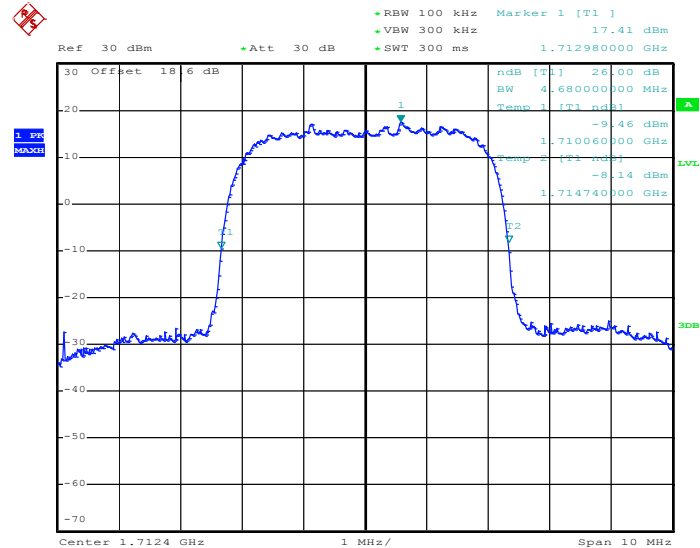26dB Bandwidth Plot on Channel 1312 (1712.4 MHz)


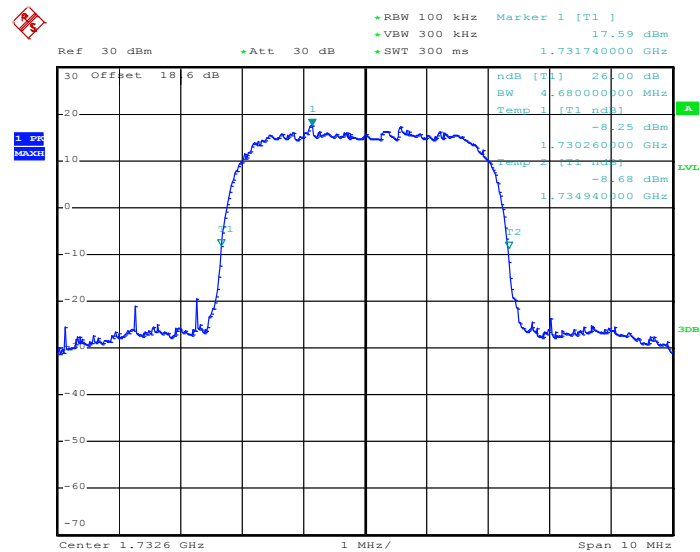
Date: 2.DEC.2013 11:17:11

99% Occupied Bandwidth Plot on Channel 1413 (1732.6 MHz)

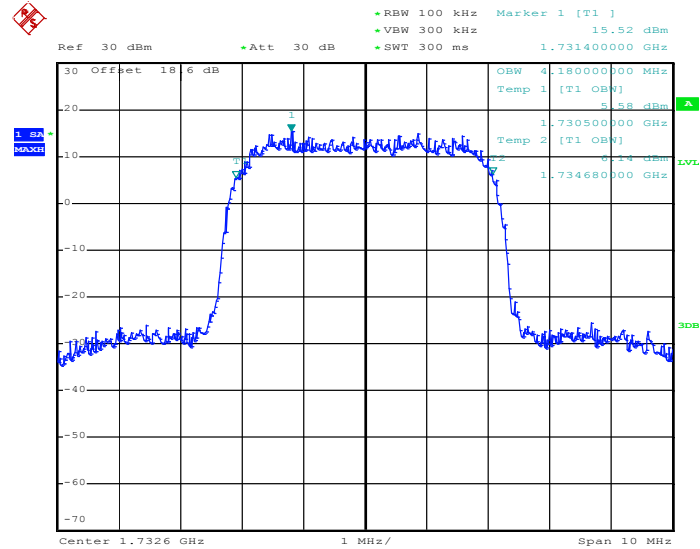

Date: 2.DEC.2013 11:19:24


26dB Bandwidth Plot on Channel 1413 (1732.6 MHz)



Date: 2.DEC.2013 11:17:40




99% Occupied Bandwidth Plot on Channel 1513 (1752.6 MHz)

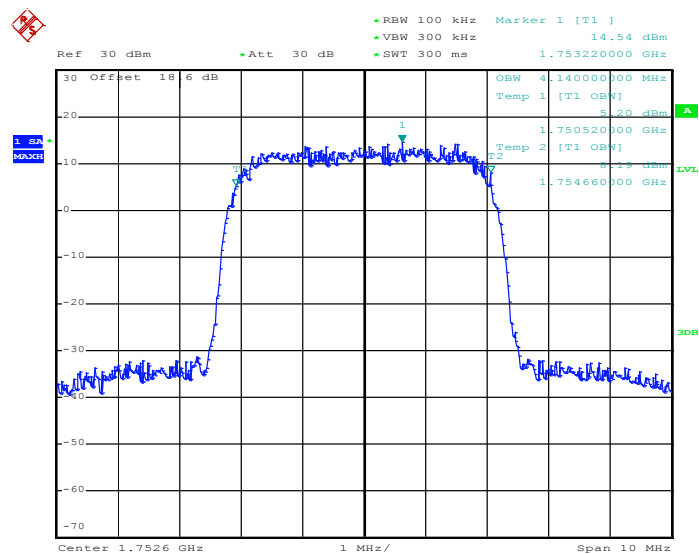

Date: 2.DEC.2013 11:19:54

26dB Bandwidth Plot on Channel 1513 (1752.6 MHz)

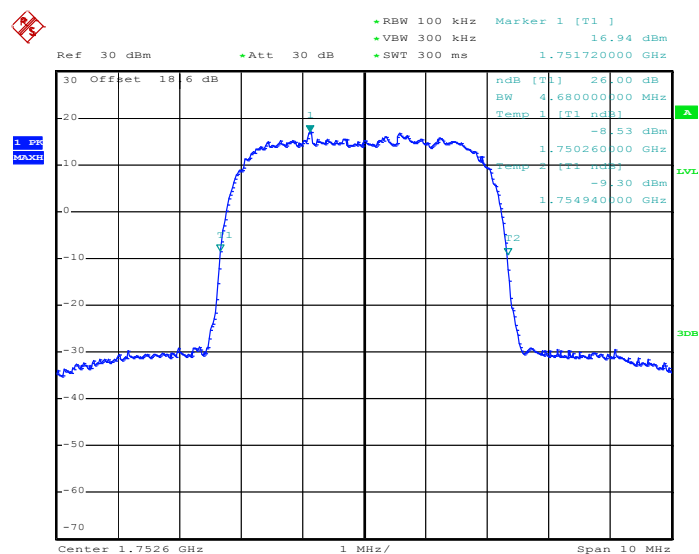


Date: 2.DEC.2013 11:18:10

Note: The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

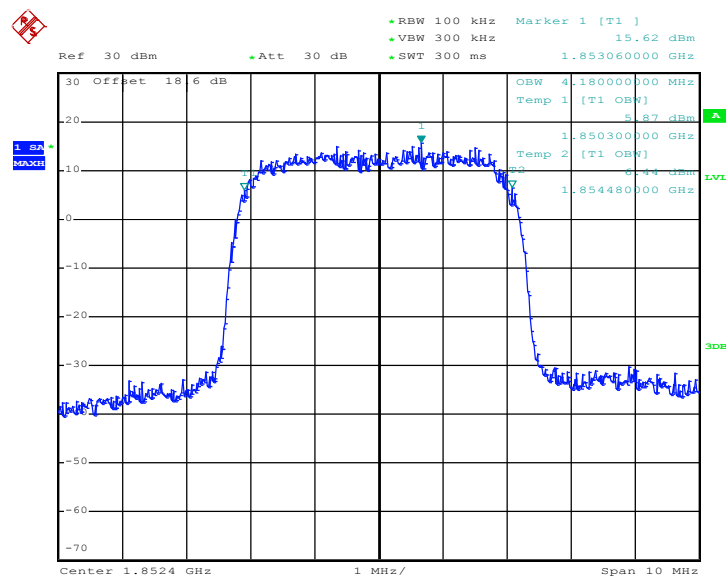

Date: 2.DEC.2013 11:02:28


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

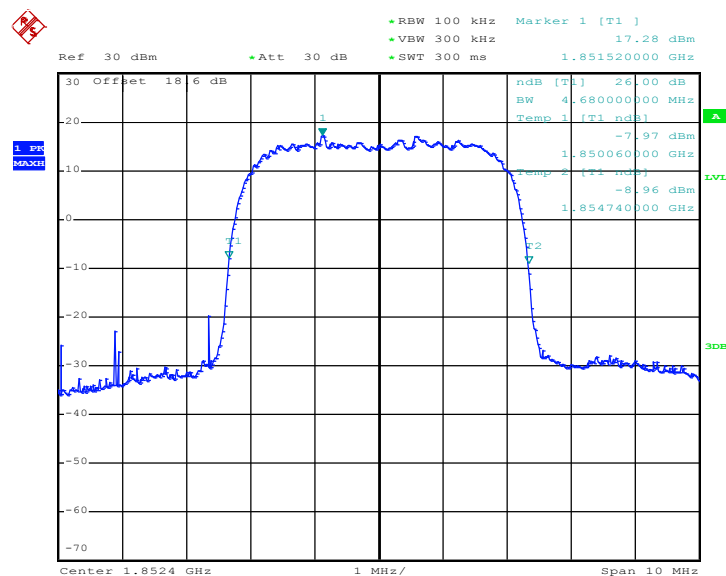

Date: 2.DEC.2013 10:59:00




99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

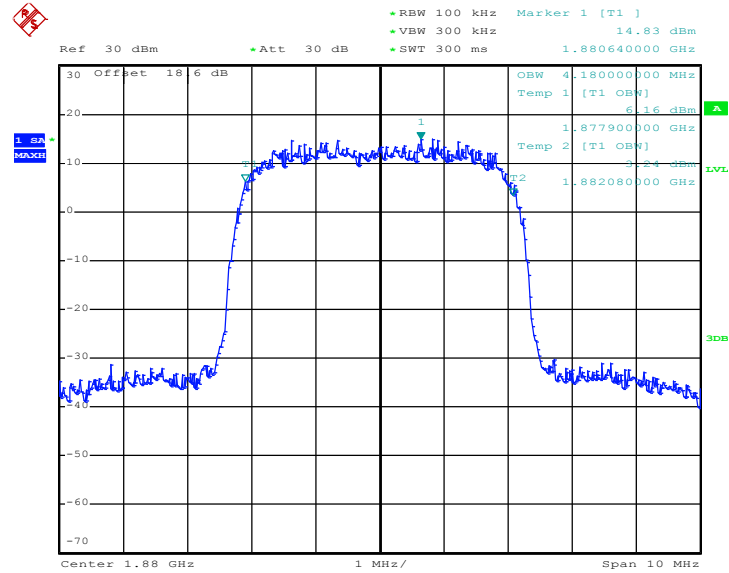

Date: 2.DEC.2013 11:02:58


26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

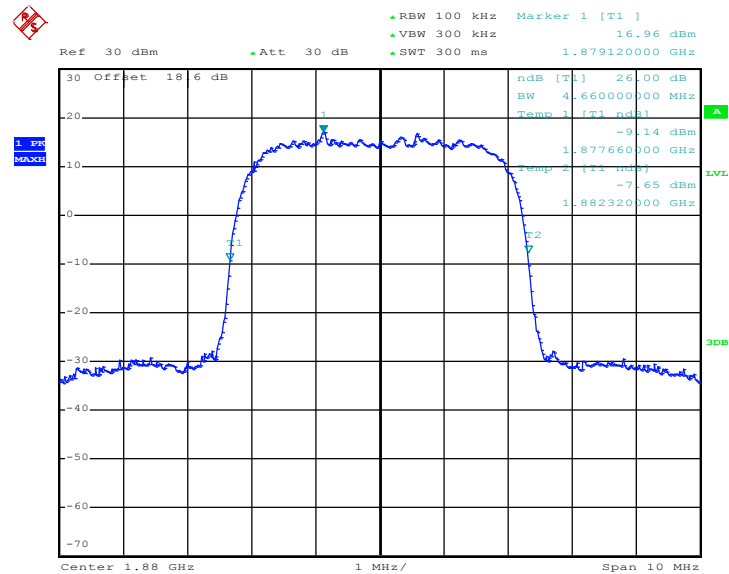

Date: 2.DEC.2013 10:59:29




99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

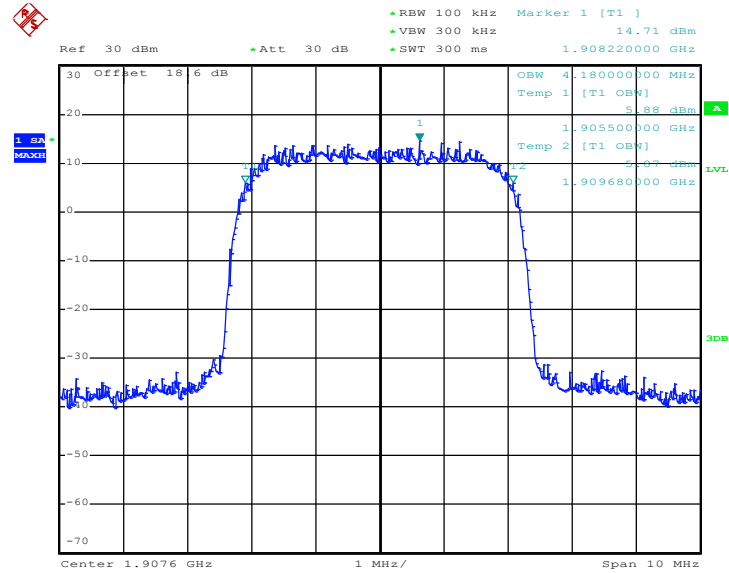

Date: 2.DEC.2013 11:03:27

26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

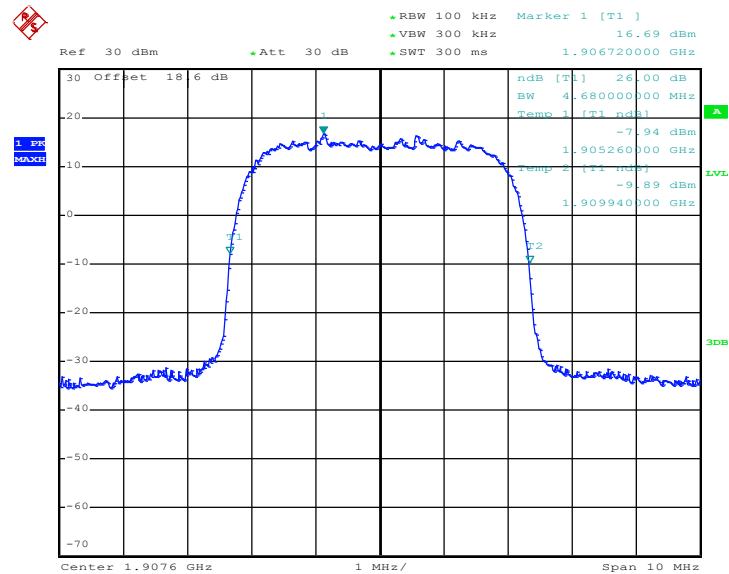

Date: 2.DEC.2013 10:59:59

Note: The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

3.5 Band Edge Measurement

3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$


3.5.4 Test Setup

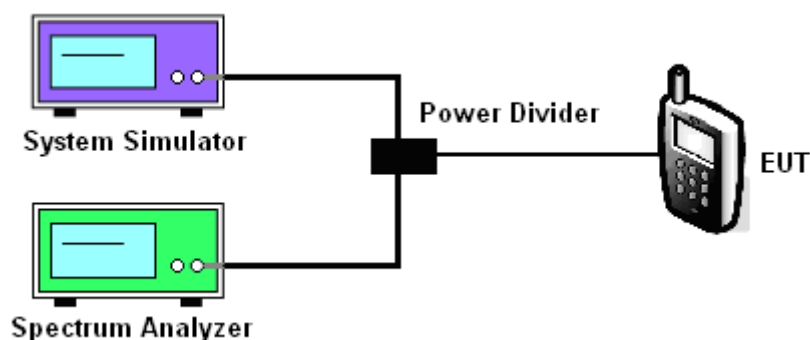

3.5.5 Test Result (Plots) of Conducted Band Edge

Band :	GSM850	Test Mode :	GPRS class 8 Link (GMSK)
Correction Factor :	0.20dB	Maximum 26dB Bandwidth :	0.314MHz
Band Edge :	-15.09dBm	Measurement Value :	-15.29dBm

Lower Band Edge Plot on Channel 128 (824.2 MHz)

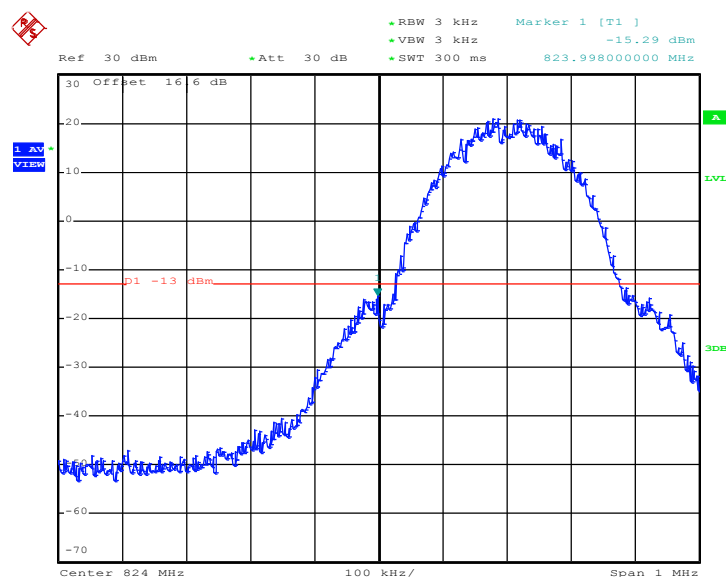


Date: 1.DEC.2013 17:29:39

1. $\text{Correction Factor(dB)} = 10\log(1\% \text{ Emission BW/RBW})$
2. $\text{Band Edge} = \text{Measurement Value} + \text{Correction Factor(dB)}$
For example, $-15.29\text{dBm} + 0.20\text{dB} = -15.09\text{dBm}$
3. The total loss is 16.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



Band :	GSM850	Test Mode :	GPRS class 8 Link (GMSK)
Correction Factor :	0.20dB	Maximum 26dB Bandwidth :	0.314MHz
Band Edge :	-14.97dBm	Measurement Value :	-15.17dBm

Higher Band Edge Plot on Channel 251 (848.8 MHz)

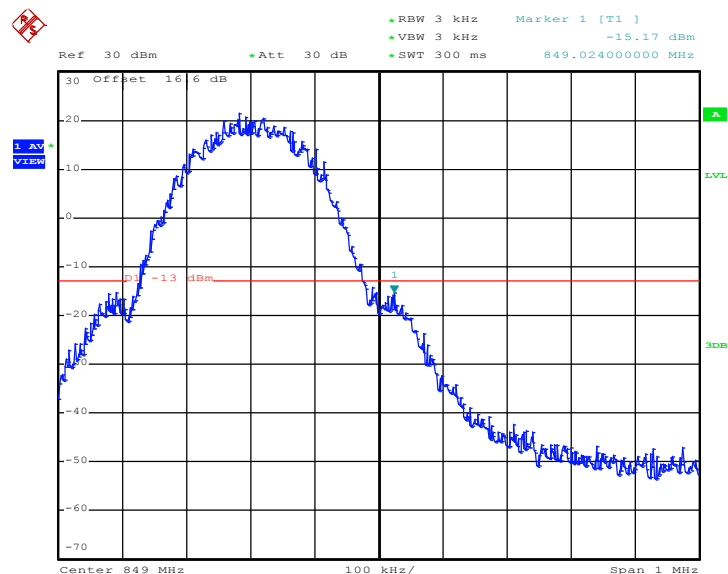


Date: 1.DEC.2013 17:30:09

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 16.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.14dB	Maximum 26dB Bandwidth :	0.310MHz
Band Edge :	-20.20dBm	Measurement Value :	-20.34dBm

Lower Band Edge Plot on Channel 128 (824.2 MHz)

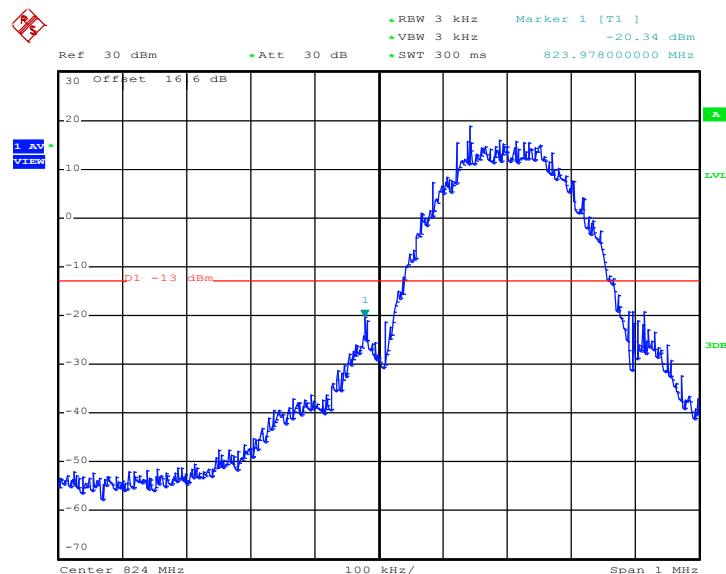


Date: 1.DEC.2013 18:00:49

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 16.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.14dB	Maximum 26dB Bandwidth :	0.310MHz
Band Edge :	-25.92dBm	Measurement Value :	-26.06dBm

Higher Band Edge Plot on Channel 251 (848.8 MHz)

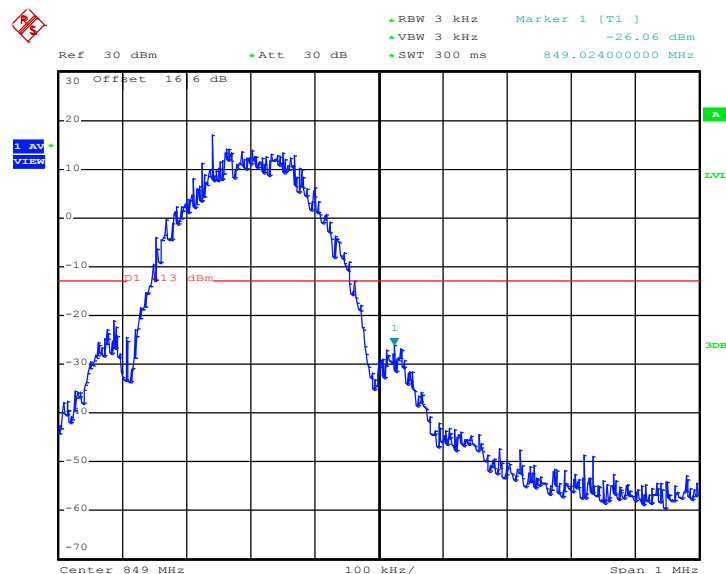


Date: 1.DEC.2013 18:03:57

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 16.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



Band :	GSM1900	Test Mode :	GPRS class 8 Link (GMSK)
Correction Factor :	0.25dB	Maximum 26dB Bandwidth :	0.318MHz
Band Edge :	-17.27dBm	Measurement Value :	-17.52dBm

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

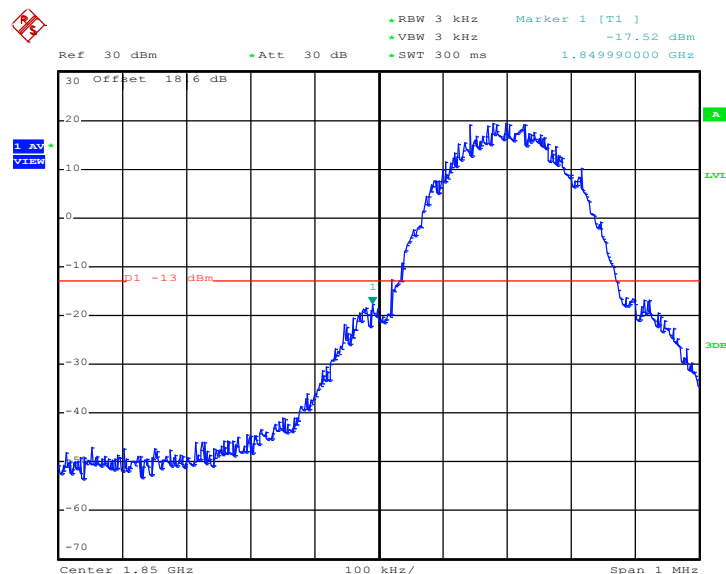


Date: 1.DEC.2013 18:25:49

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



Band :	GSM1900	Test Mode :	GPRS class 8 Link (GMSK)
Correction Factor :	0.25dB	Maximum 26dB Bandwidth :	0.318MHz
Band Edge :	-16.66dBm	Measurement Value :	-16.91dBm


Higher Band Edge Plot on Channel 810 (1909.8 MHz)

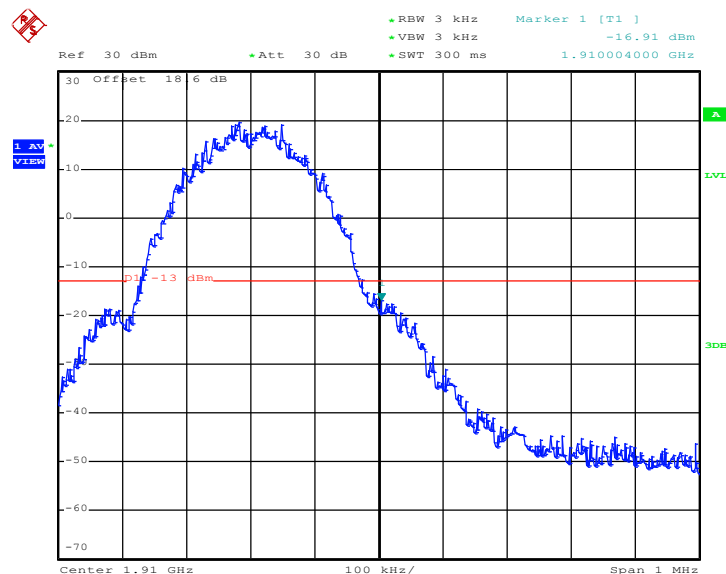

Date: 1.DEC.2013 18:26:19

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.14dB	Maximum 26dB Bandwidth :	0.310MHz
Band Edge :	-21.18dBm	Measurement Value :	-21.32dBm

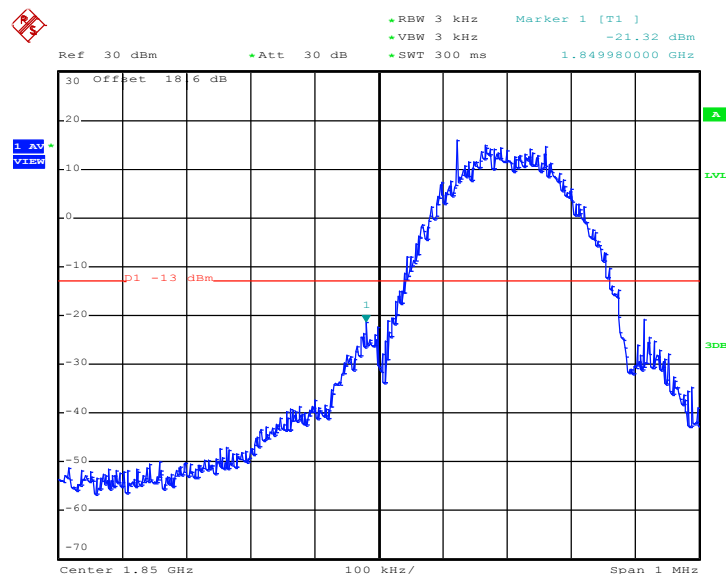Lower Band Edge Plot on Channel 512 (1850.2 MHz)


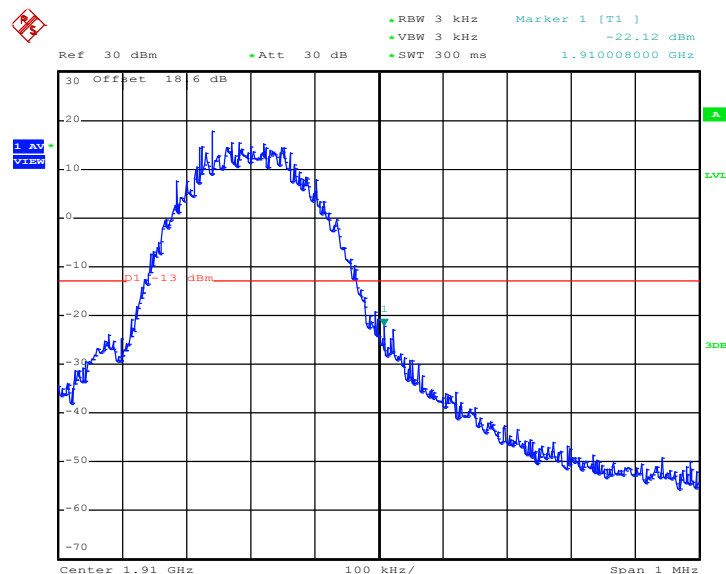
Date: 1.DEC.2013 18:44:00

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
Correction Factor :	0.14dB	Maximum 26dB Bandwidth :	0.310MHz
Band Edge :	-21.98dBm	Measurement Value :	-22.12dBm

Higher Band Edge Plot on Channel 810 (1909.8 MHz)




Date: 1.DEC.2013 18:44:30

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.30dB	Maximum 26dB Bandwidth :	4.68MHz
Band Edge :	-31.68dBm	Measurement Value :	-28.38dBm

Lower Band Edge Plot on Channel 4132 (826.4 MHz)

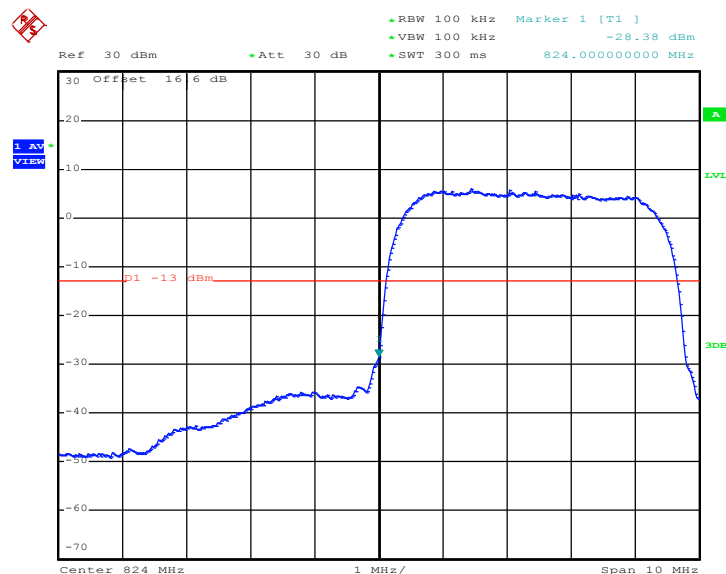


Date: 2.DEC.2013 11:47:31

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 16.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.30dB	Maximum 26dB Bandwidth :	4.68MHz
Band Edge :	-31.48dBm	Measurement Value :	-28.18dBm


Higher Band Edge Plot on Channel 4233 (846.6 MHz)

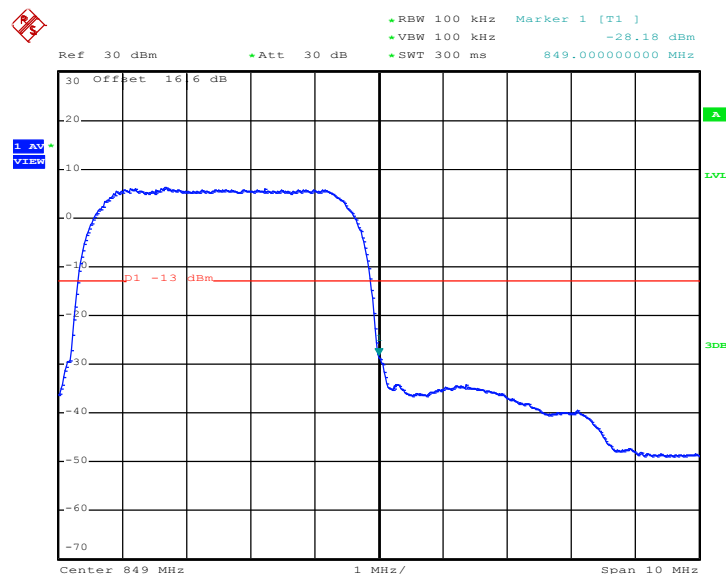

Date: 2.DEC.2013 11:48:01

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 16.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.


Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.30dB	Maximum 26dB Bandwidth :	4.68MHz
Band Edge :	-32.56dBm	Measurement Value :	-29.26dBm

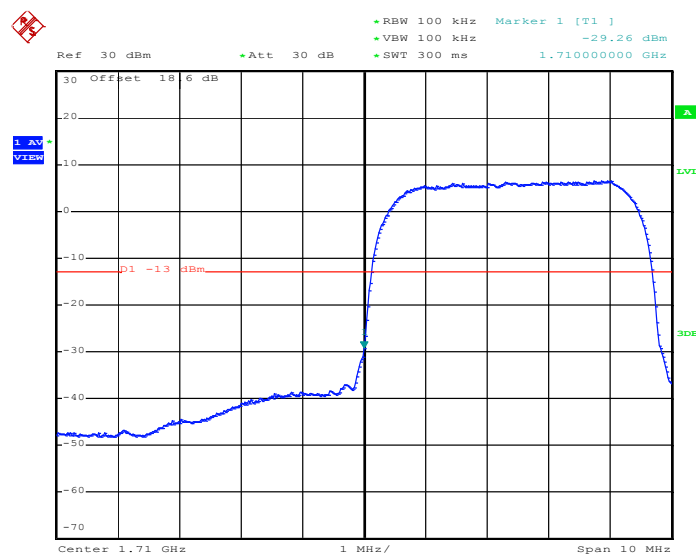Lower Band Edge Plot on Channel 1312 (1712.4 MHz)


Date: 2.DEC.2013 11:20:32

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

Band :	WCDMA Band IV	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.30dB	Maximum 26dB Bandwidth :	4.68MHz
Band Edge :	-32.99dBm	Measurement Value :	-29.69dBm

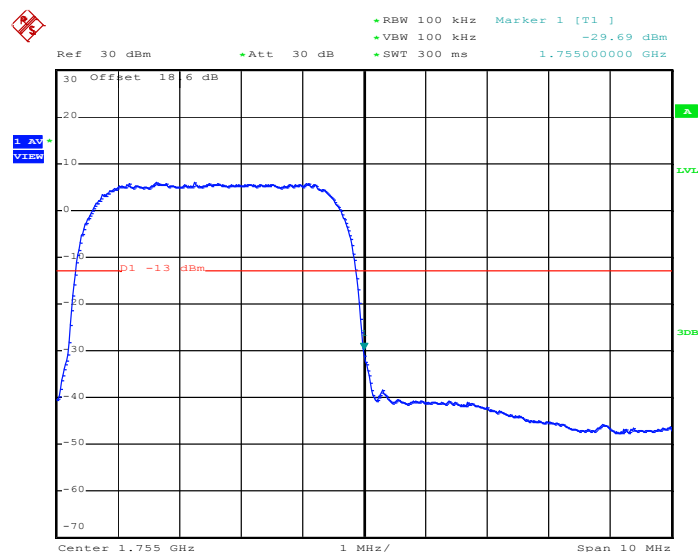Higher Band Edge Plot on Channel 1513 (1752.6 MHz)


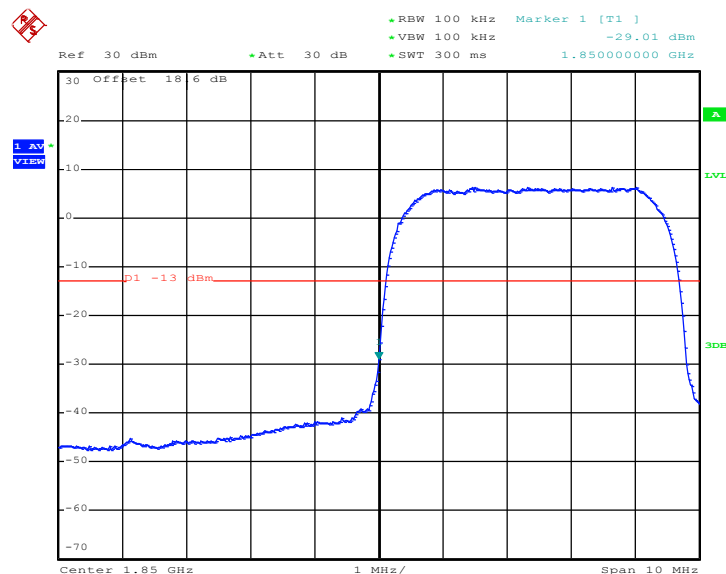
Date: 2.DEC.2013 11:21:01

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.30dB	Maximum 26dB Bandwidth :	4.68MHz
Band Edge :	-32.31dBm	Measurement Value :	-29.01dBm

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)




Date: 2.DEC.2013 11:04:13

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
Correction Factor :	-3.30dB	Maximum 26dB Bandwidth :	4.68MHz
Band Edge :	-33.25dBm	Measurement Value :	-29.95dBm

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

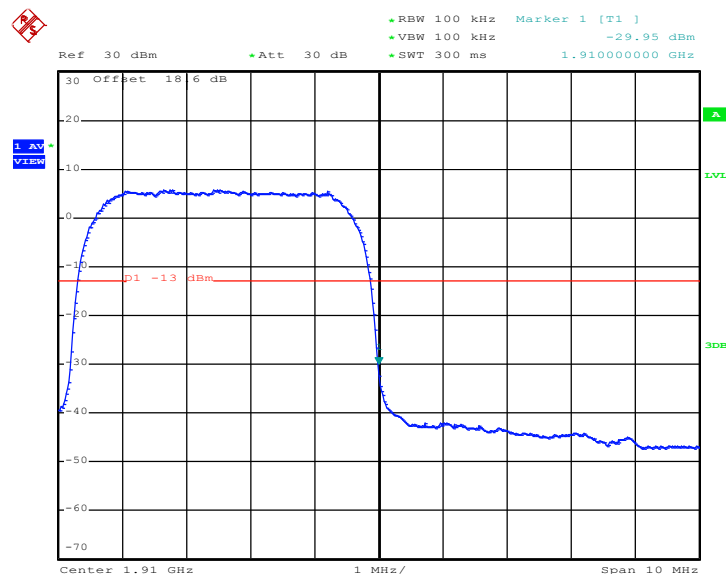

Date: 2.DEC.2013 11:04:43

1. Correction Factor(dB)= $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)
3. The total loss is 18.60 dB of the RF cable and attenuator, and has been compensated to the spectrum analyzer offset.

3.6 Conducted Spurious Emission Measurement

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$


3.6.4 Test Setup

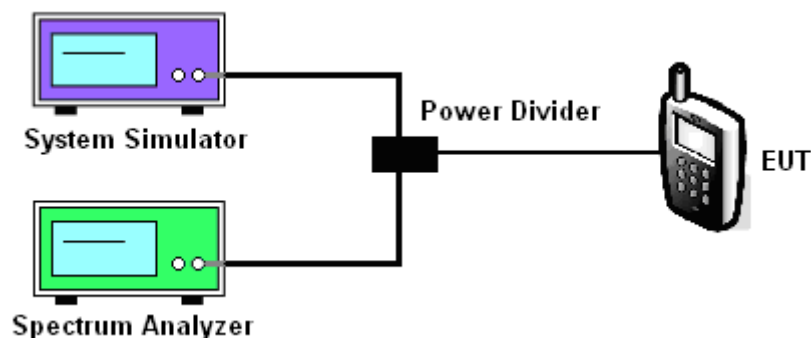

3.6.5 Test Result (Plots) of Conducted Spurious Emission

Band :	GSM850	Channel :	CH128
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	824.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

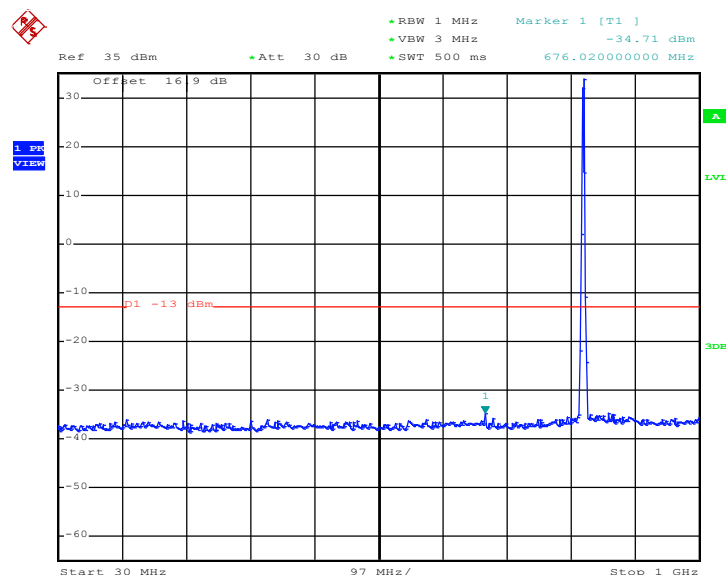


Date: 5.DEC.2013 15:14:41

Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




Conducted Spurious Emission Plot between 1GHz ~ 3GHz

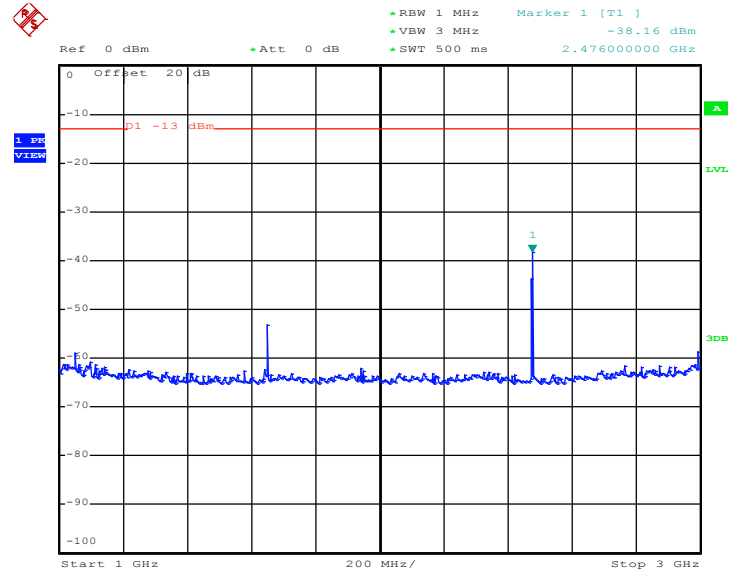

Date: 5.DEC.2013 15:14:54


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

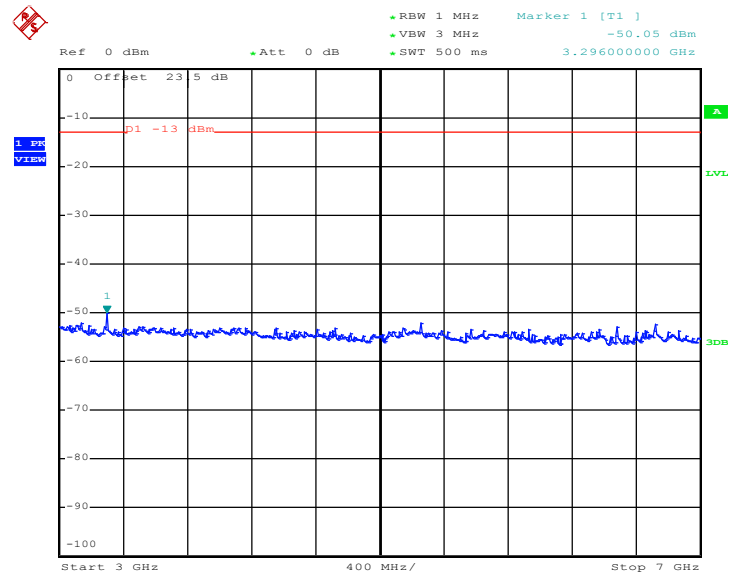

Date: 5.DEC.2013 15:15:03




Conducted Spurious Emission Plot between 7GHz ~ 9GHz

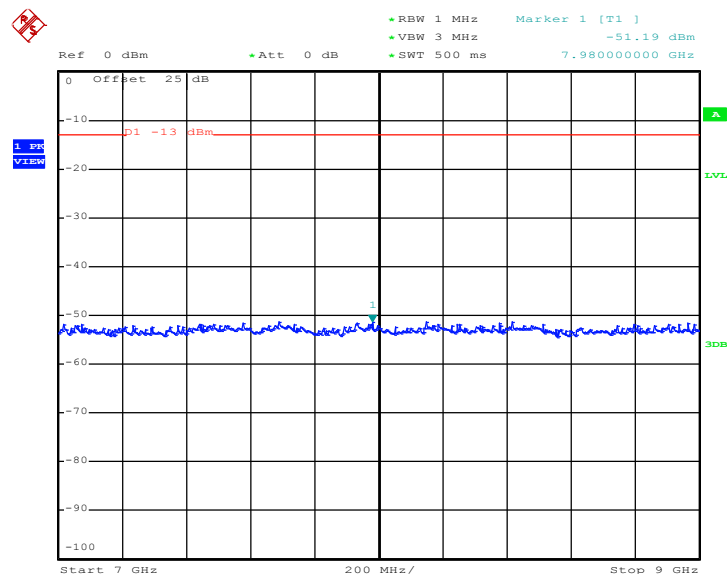

Date: 5.DEC.2013 15:15:11


Band :	GSM850	Channel :	CH189
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	836.4 MHz

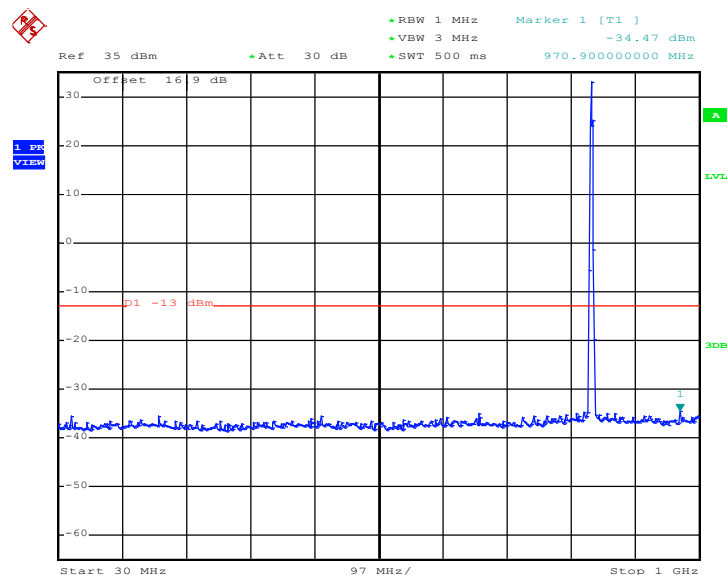Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 1.DEC.2013 17:00:22


Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

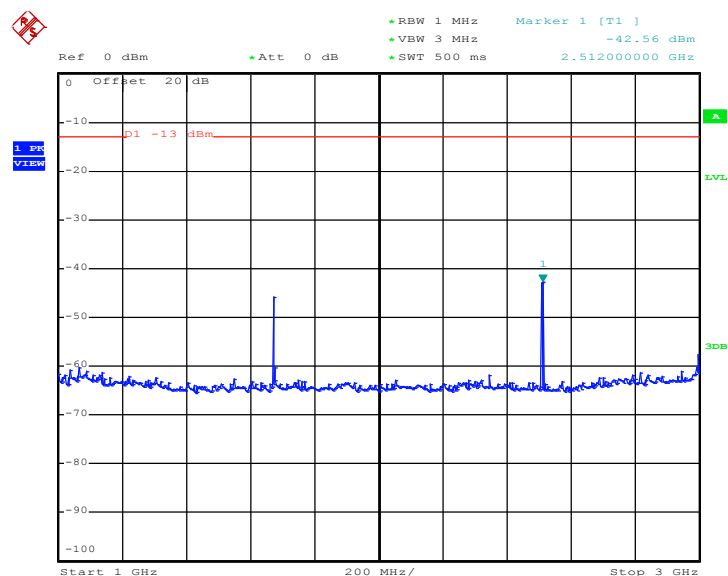


Date: 1.DEC.2013 17:00:38

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

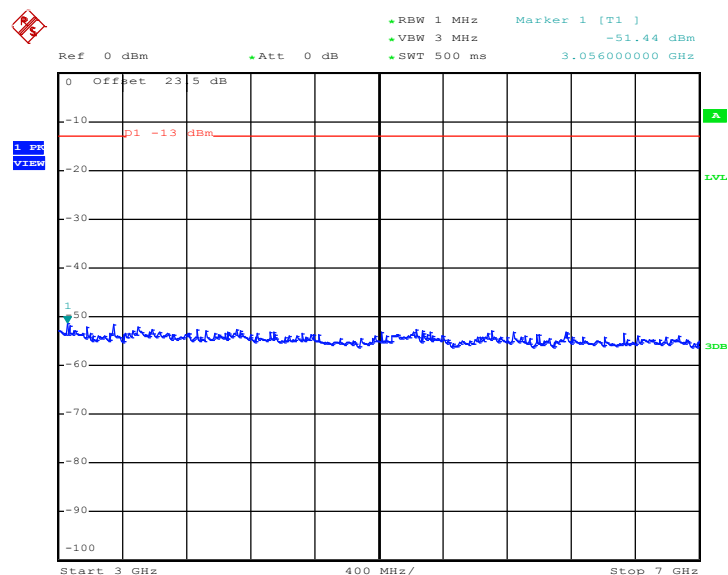


Date: 1.DEC.2013 17:00:48

Conducted Spurious Emission Plot between 7GHz ~ 9GHz

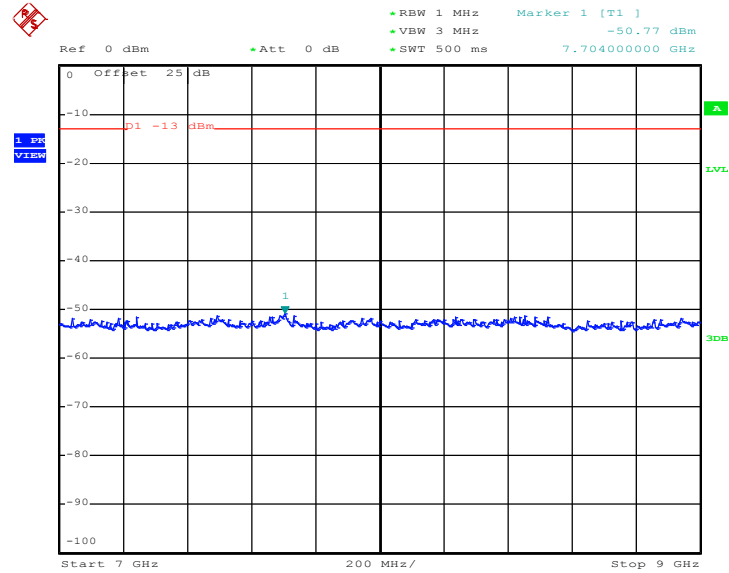

Date: 1.DEC.2013 17:00:58

Band :	GSM850	Channel :	CH251
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	848.8 MHz

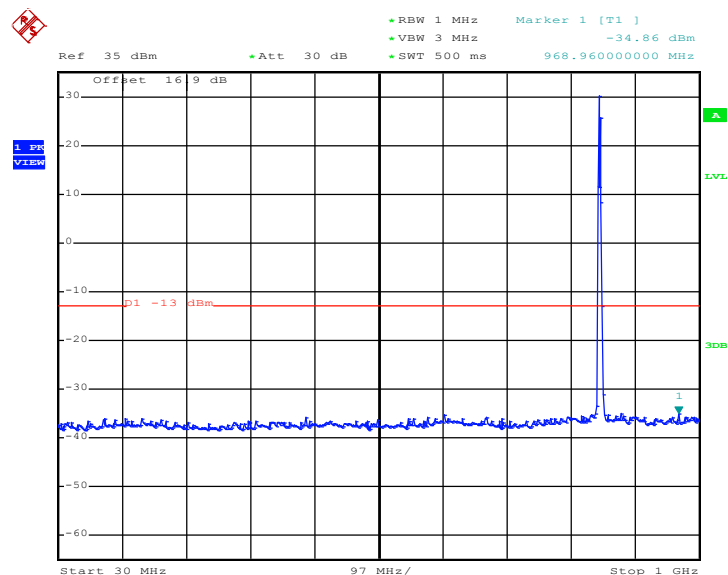
Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 5.DEC.2013 15:17:26

Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




Conducted Spurious Emission Plot between 1GHz ~ 3GHz

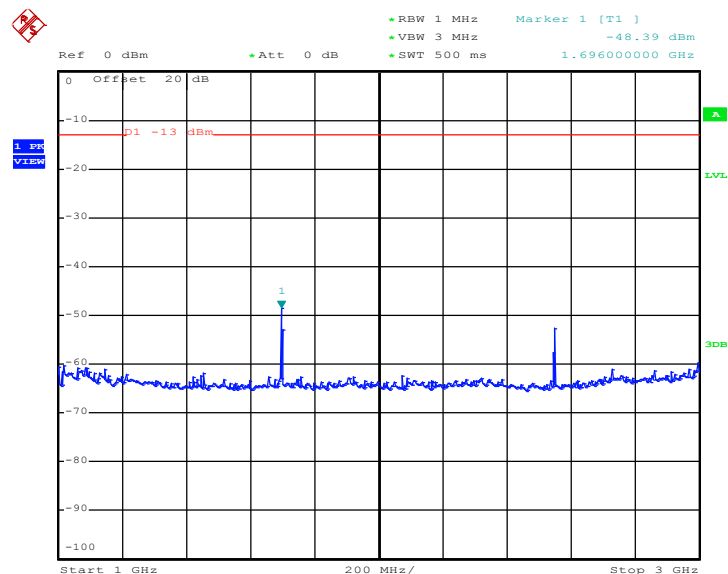

Date: 5.DEC.2013 15:17:38


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

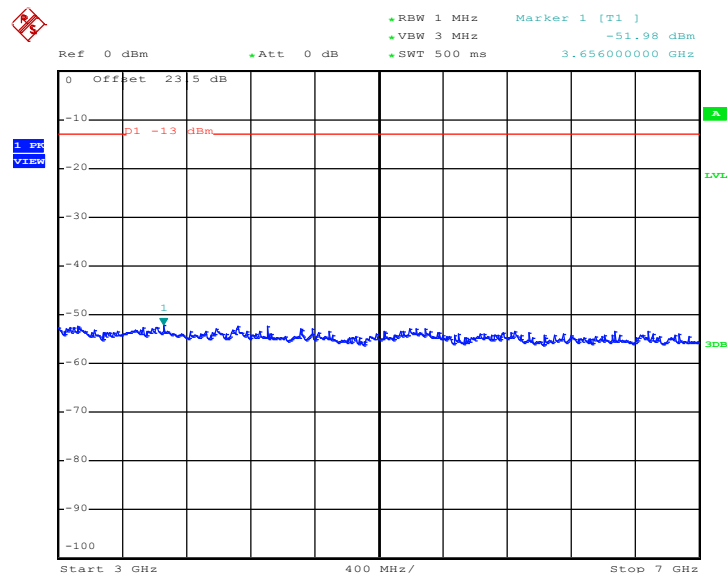

Date: 5.DEC.2013 15:17:46




Conducted Spurious Emission Plot between 7GHz ~ 9GHz

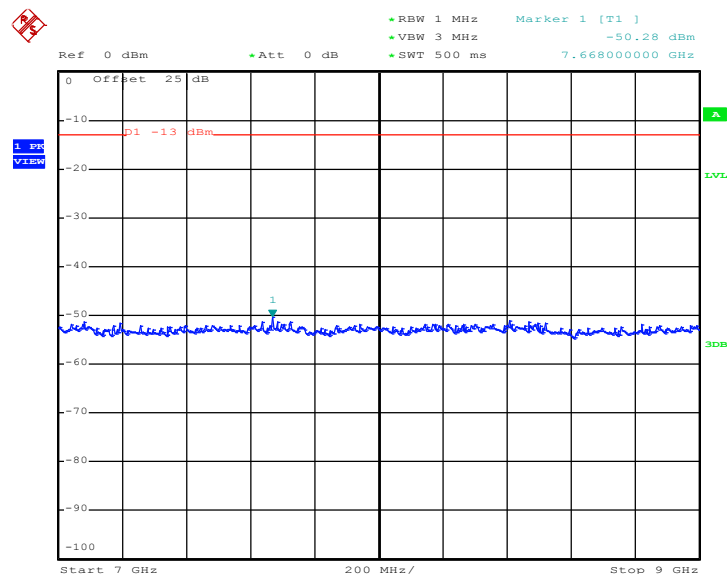

Date: 5.DEC.2013 15:17:55

Band :	GSM850	Channel :	CH128
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	824.2 MHz

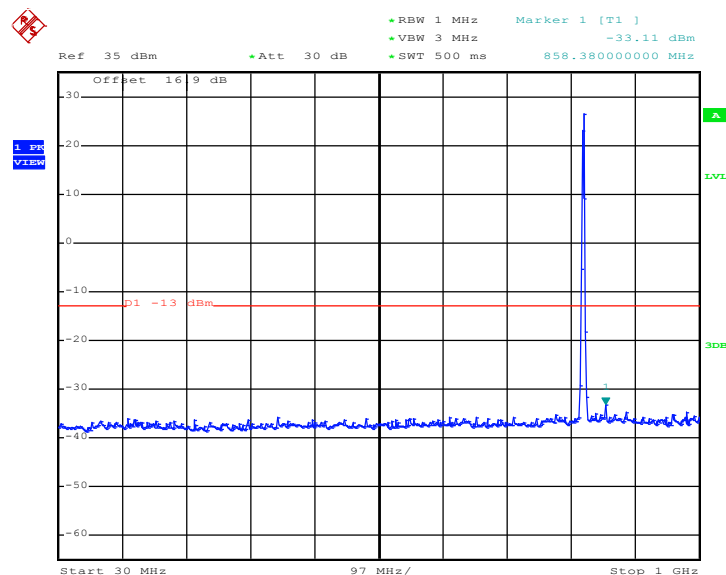
Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 5.DEC.2013 15:21:21

Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




Conducted Spurious Emission Plot between 1GHz ~ 3GHz

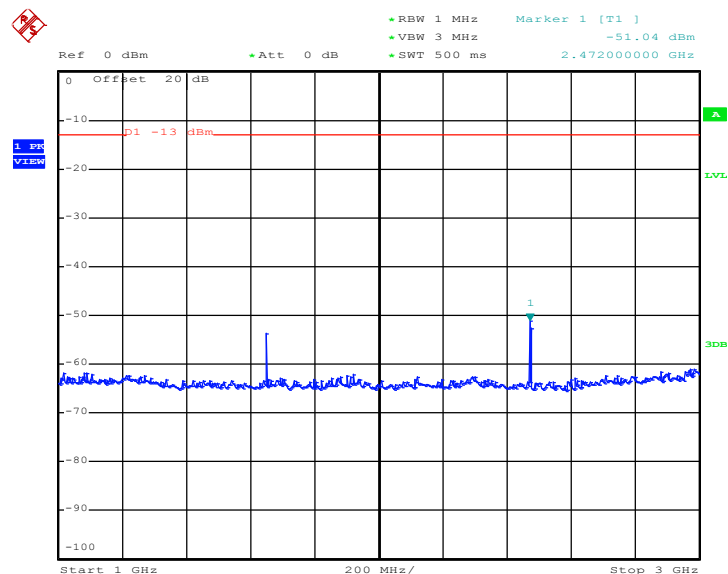

Date: 5.DEC.2013 15:21:35


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

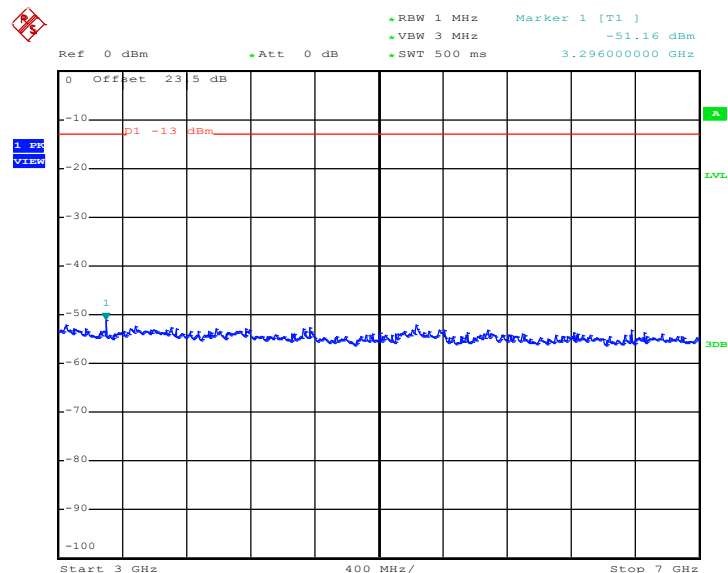

Date: 5.DEC.2013 15:21:43




Conducted Spurious Emission Plot between 7GHz ~ 9GHz

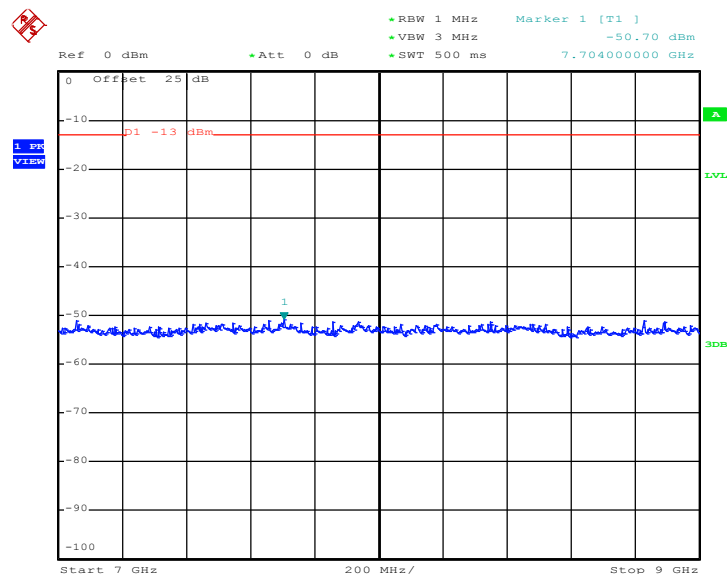

Date: 5.DEC.2013 15:21:51

Band :	GSM850	Channel :	CH189
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	836.4 MHz

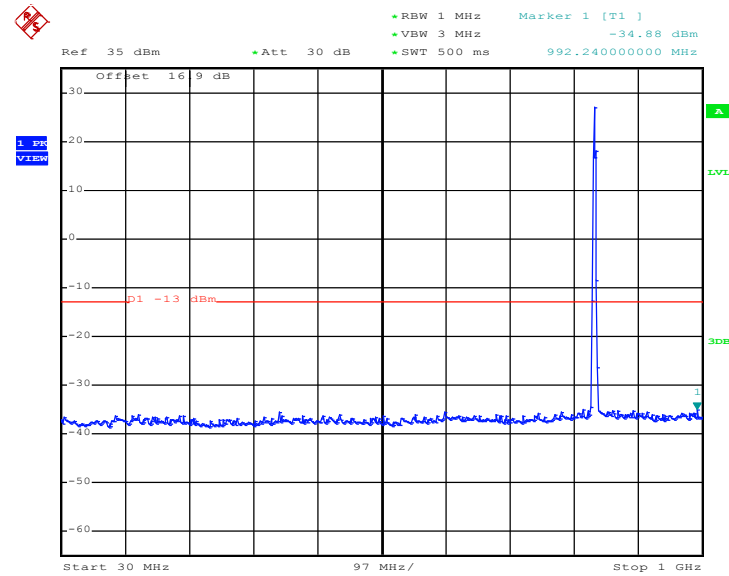
Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 1.DEC.2013 17:40:31

Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




Conducted Spurious Emission Plot between 1GHz ~ 3GHz

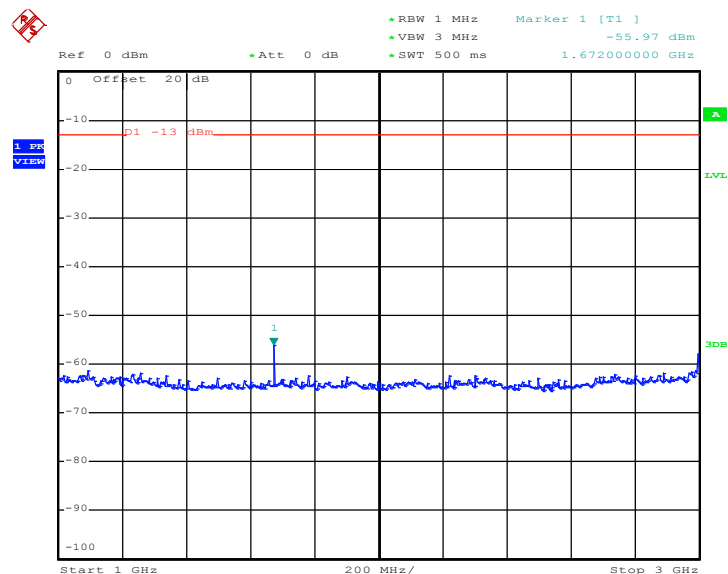

Date: 1.DEC.2013 17:40:46


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

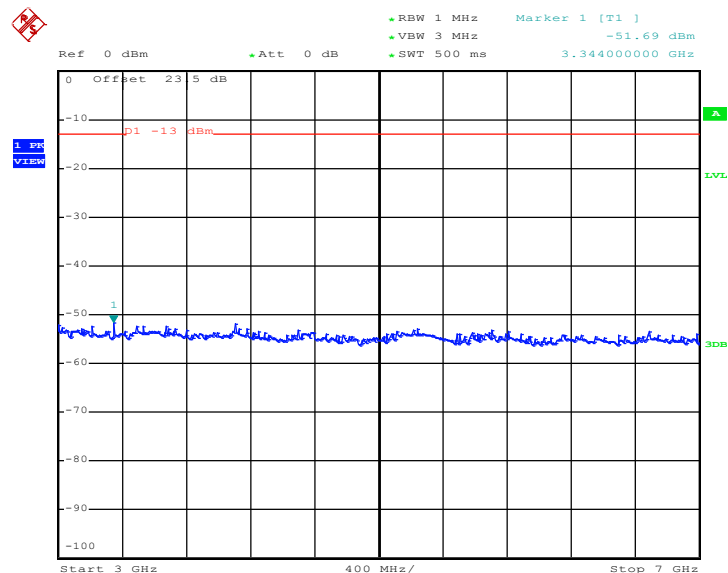

Date: 1.DEC.2013 17:40:56




Conducted Spurious Emission Plot between 7GHz ~ 9GHz

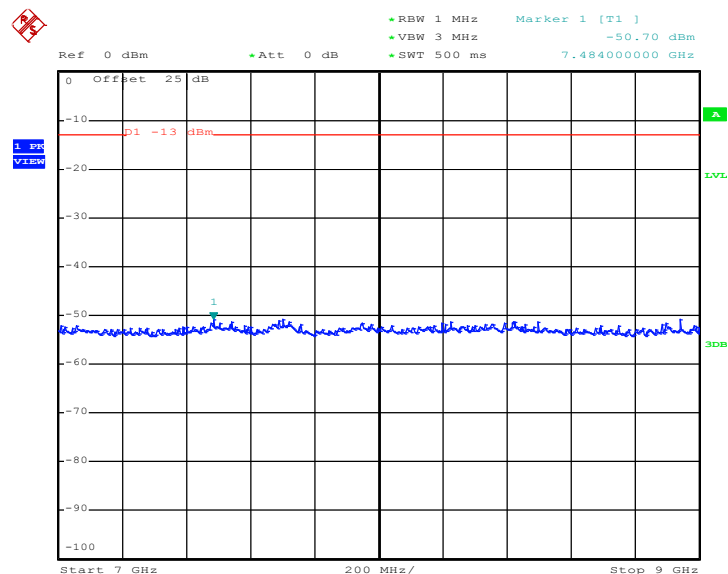

Date: 1.DEC.2013 17:41:05


Band :	GSM850	Channel :	CH251
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	848.8 MHz

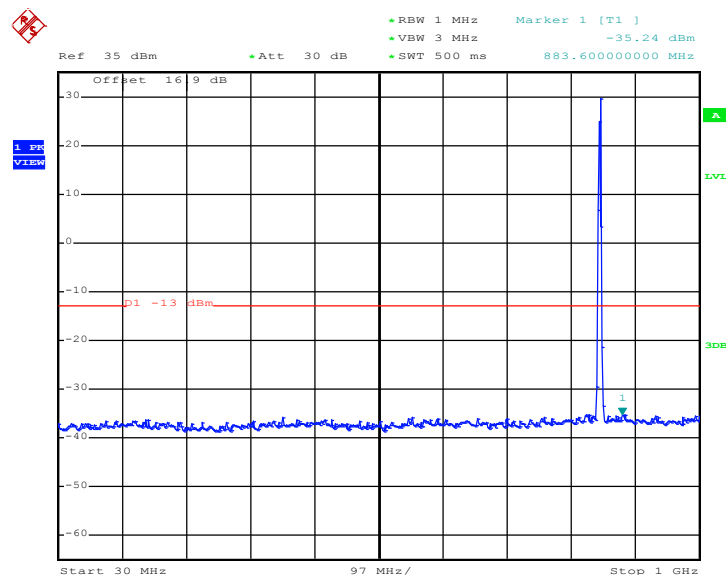Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 5.DEC.2013 15:23:50


Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

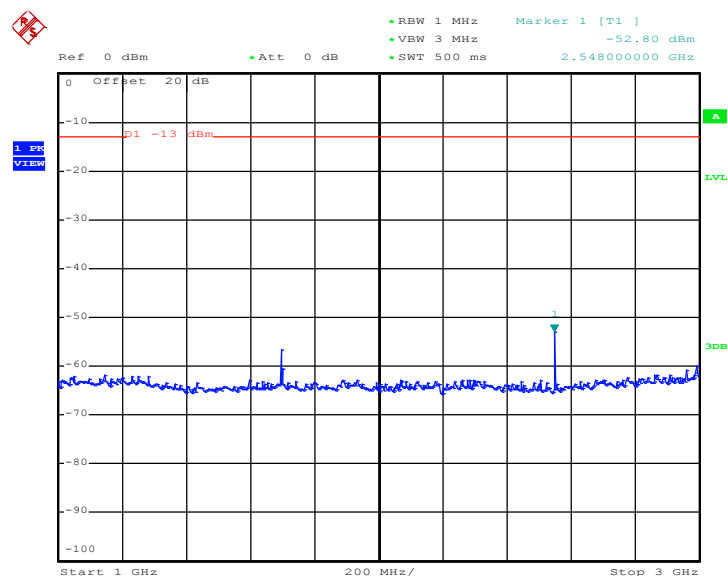

Date: 5.DEC.2013 15:24:03


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

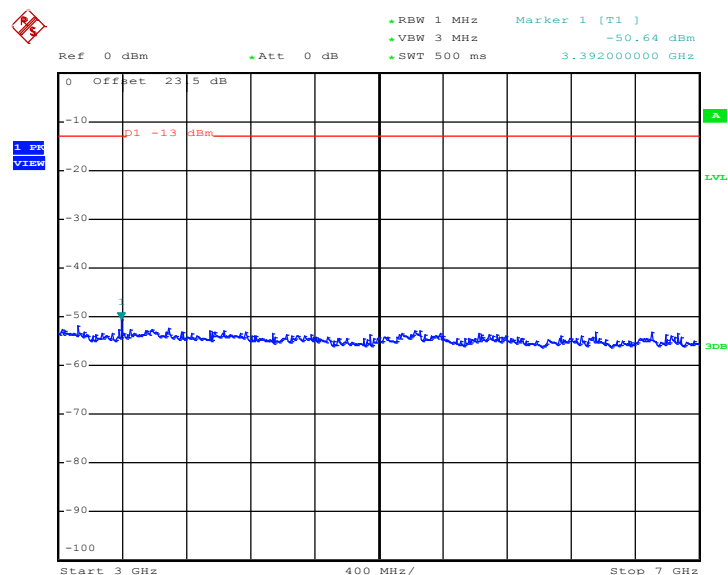

Date: 5.DEC.2013 15:24:11




Conducted Spurious Emission Plot between 7GHz ~ 9GHz

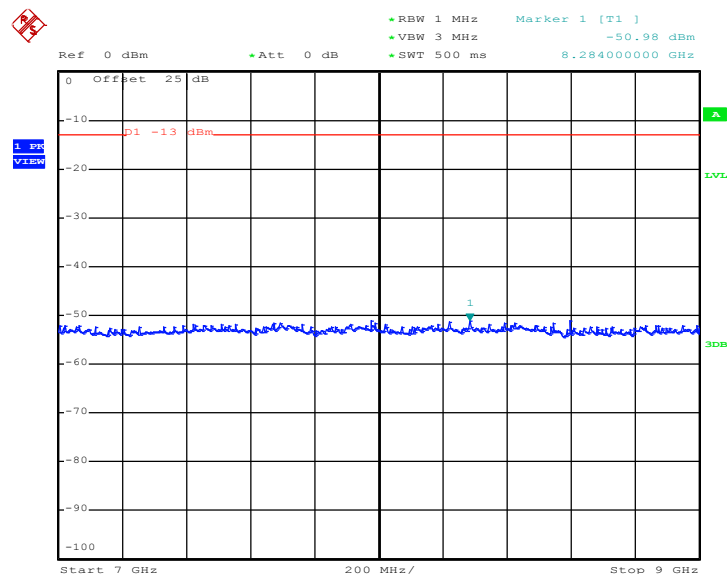

Date: 5.DEC.2013 15:24:20


Band :	GSM1900	Channel :	CH512
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1850.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

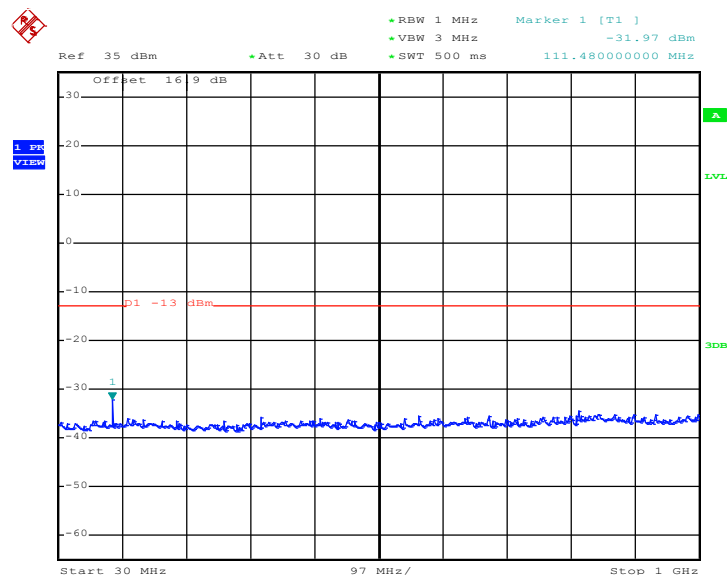

Date: 5.DEC.2013 15:29:54


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

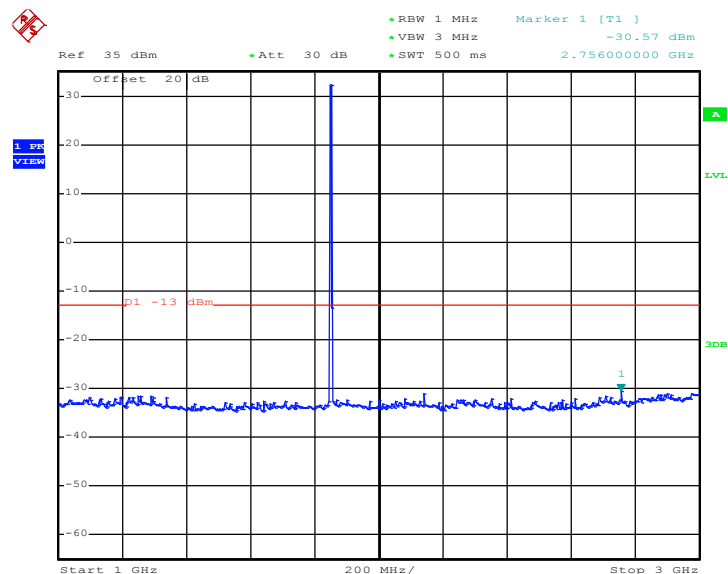

Date: 5.DEC.2013 15:30:02


Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

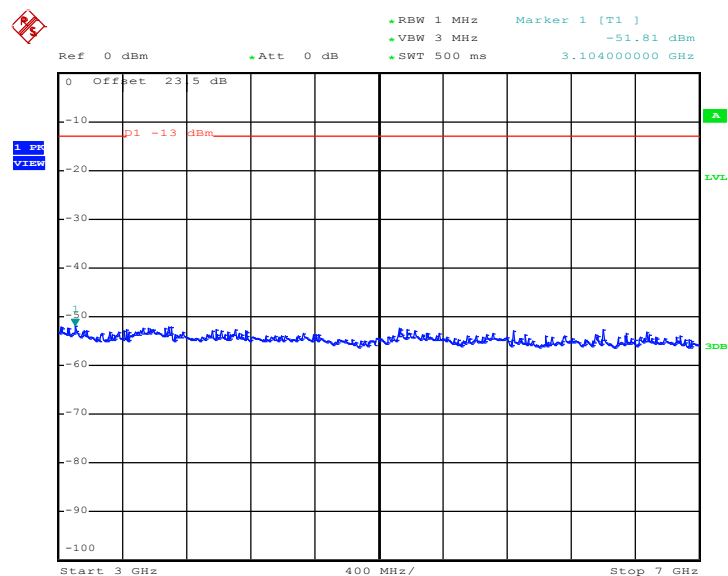


Date: 5.DEC.2013 15:30:14

Conducted Emission Plot between 7GHz ~ 13.6GHz

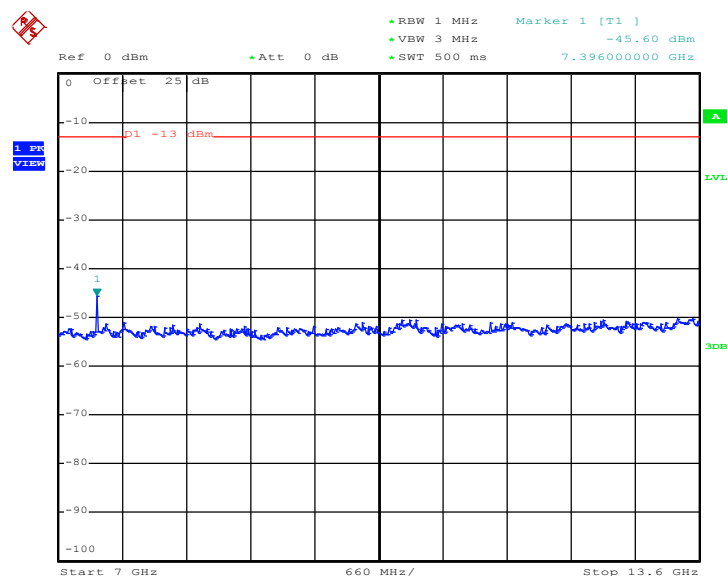

Date: 5.DEC.2013 15:30:22

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

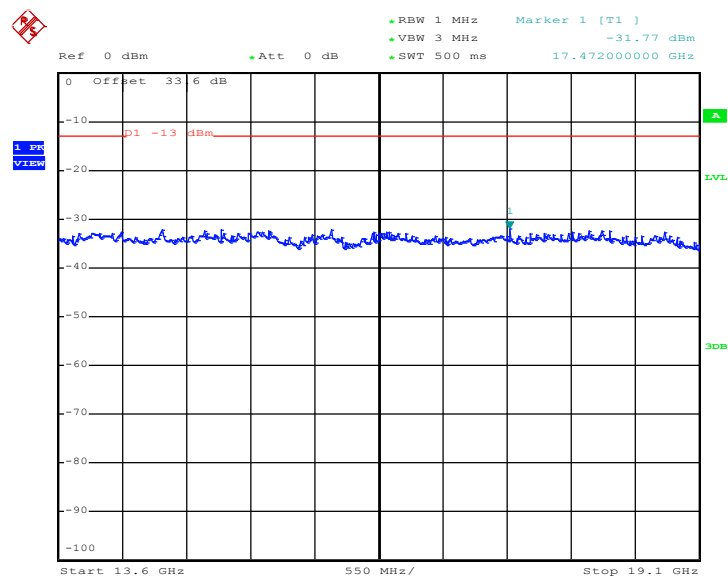


Date: 5.DEC.2013 15:30:31




Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

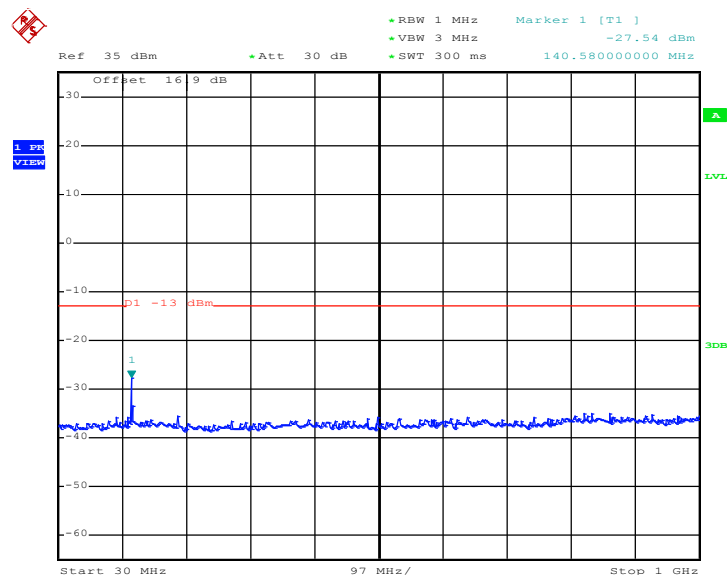

Date: 1.DEC.2013 18:18:08


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

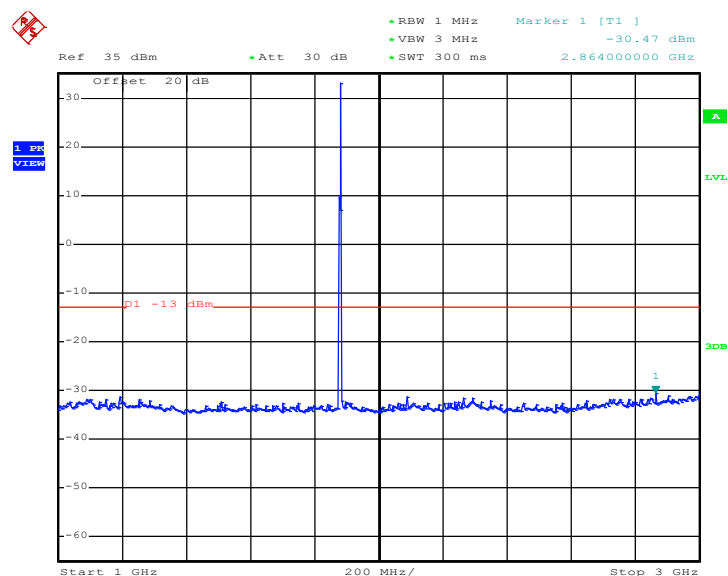

Date: 1.DEC.2013 18:18:18


Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

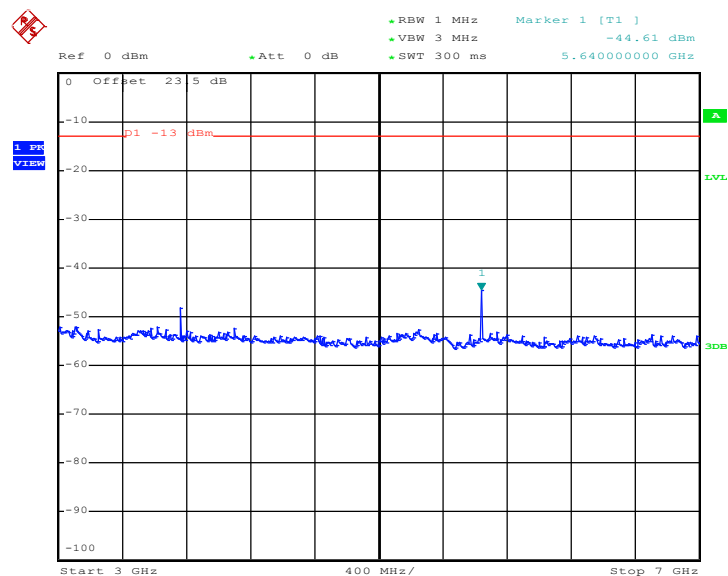


Date: 1.DEC.2013 18:18:45

Conducted Emission Plot between 7GHz ~ 13.6GHz

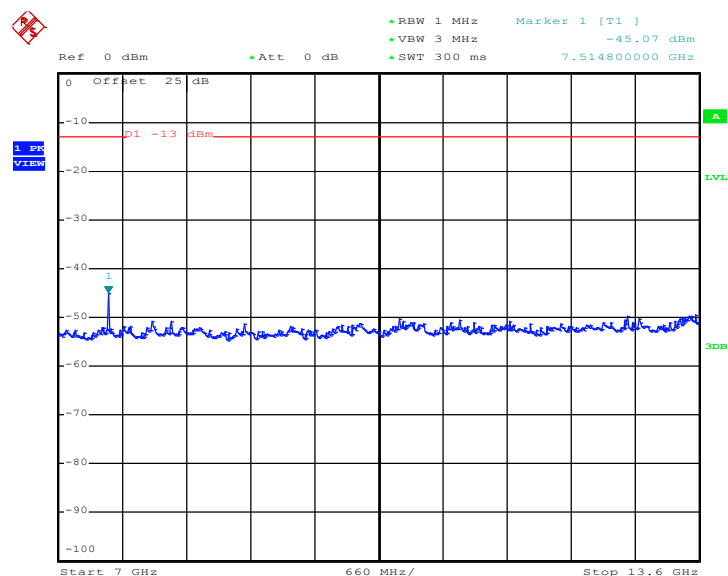

Date: 1.DEC.2013 18:18:55

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

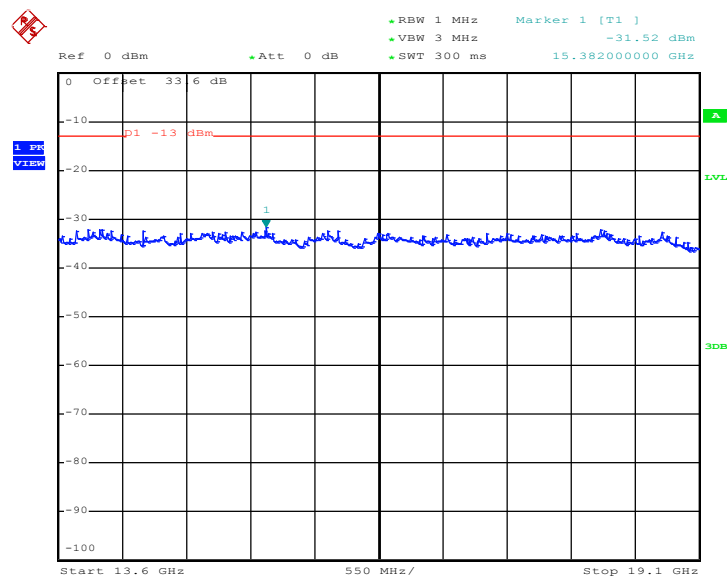


Date: 1.DEC.2013 18:19:04




Band :	GSM1900	Channel :	CH810
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1909.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

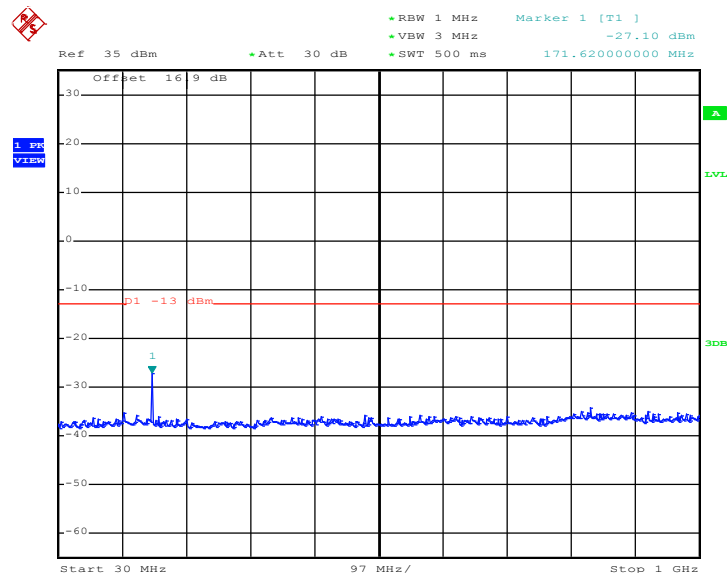

Date: 5.DEC.2013 15:32:01


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

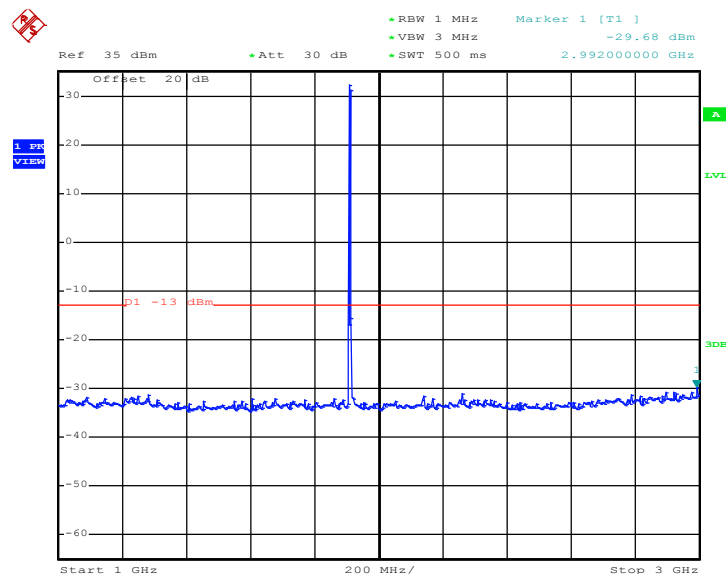

Date: 5.DEC.2013 15:32:10


Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

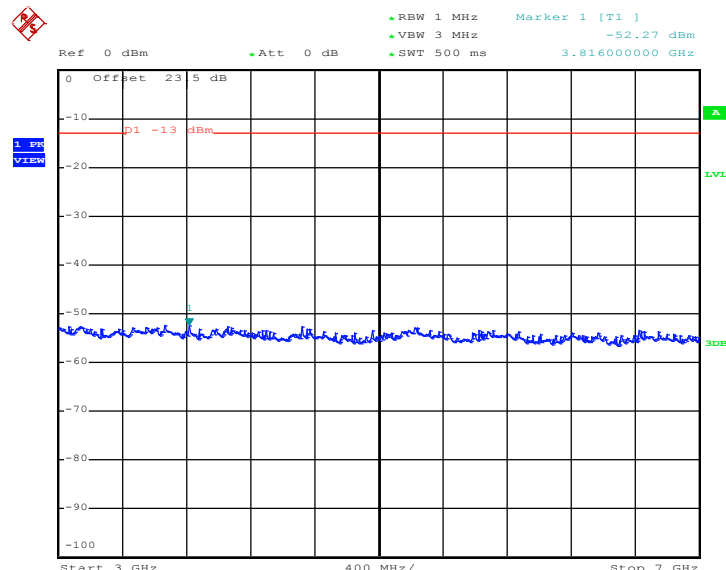


Date: 5.DEC.2013 15:32:22

Conducted Emission Plot between 7GHz ~ 13.6GHz

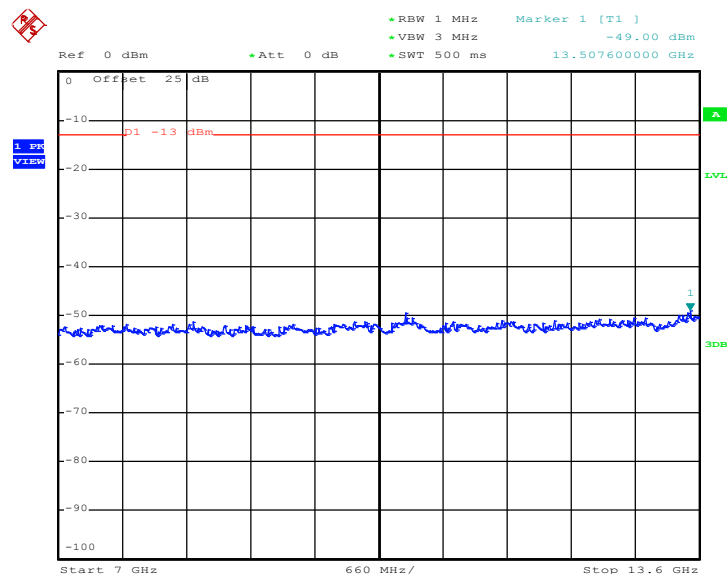

Date: 5.DEC.2013 15:32:31

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

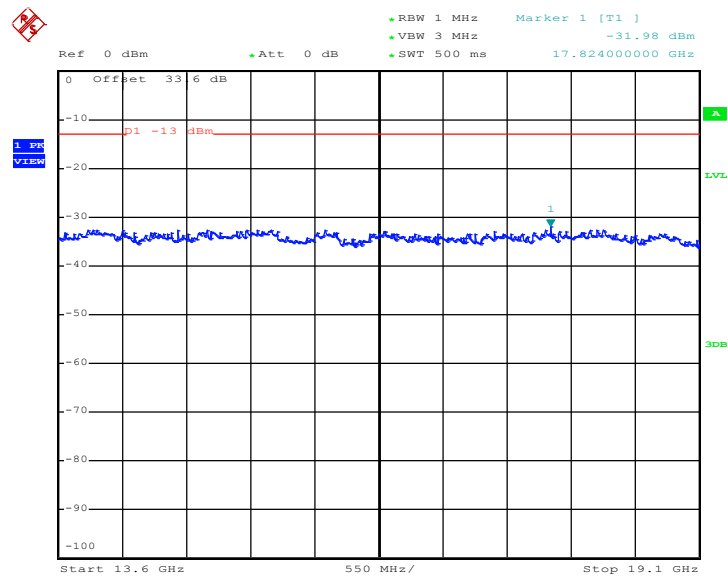


Date: 5.DEC.2013 15:32:39




Band :	GSM1900	Channel :	CH512
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1850.2 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

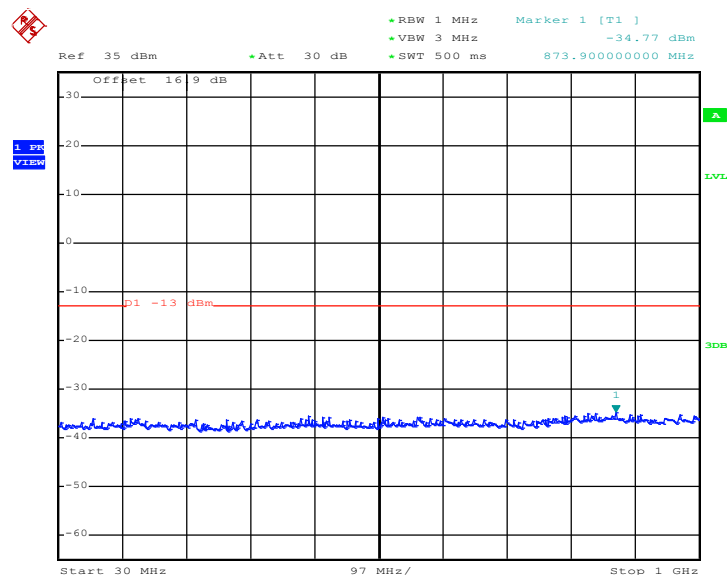

Date: 5.DEC.2013 15:36:18


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

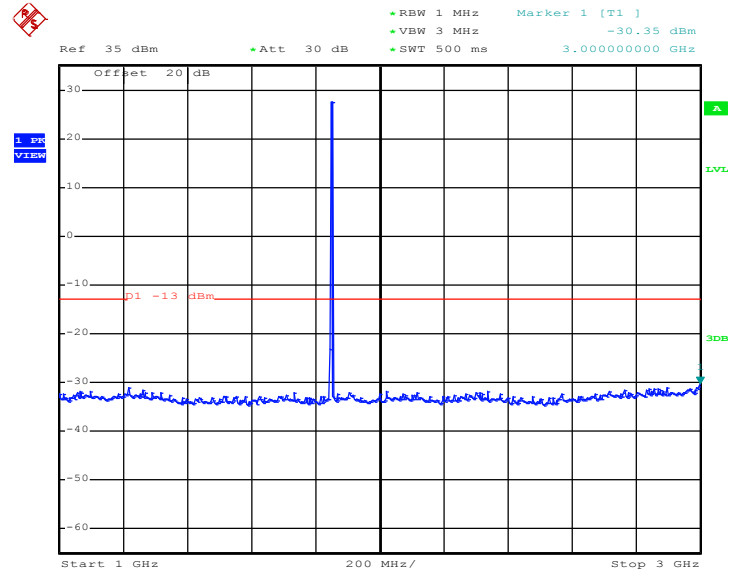

Date: 5.DEC.2013 15:36:27

Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

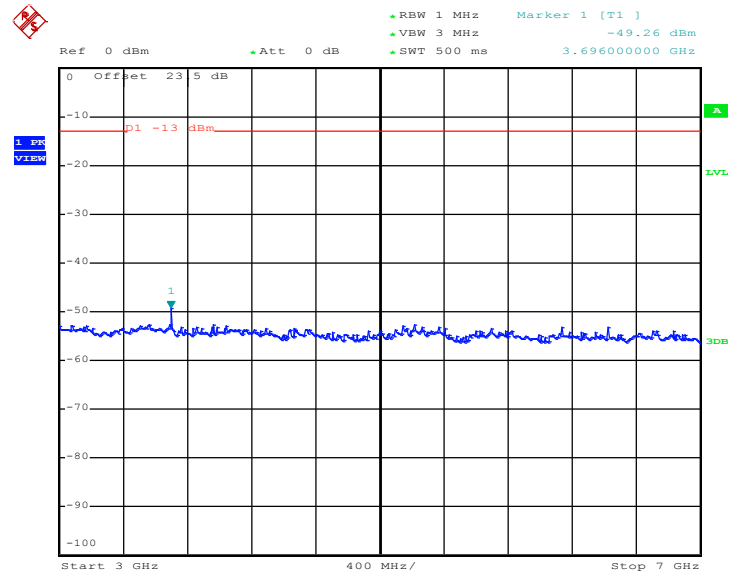

Date: 5.DEC.2013 15:36:39




Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

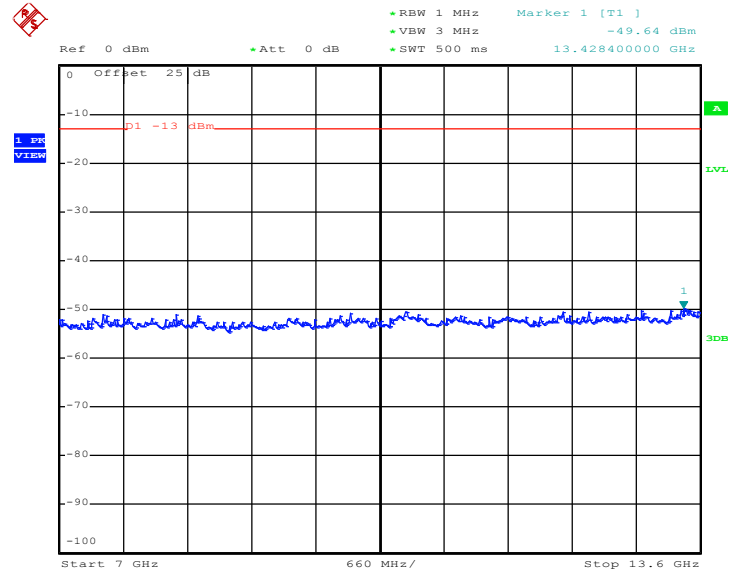

Date: 5.DEC.2013 15:36:47

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

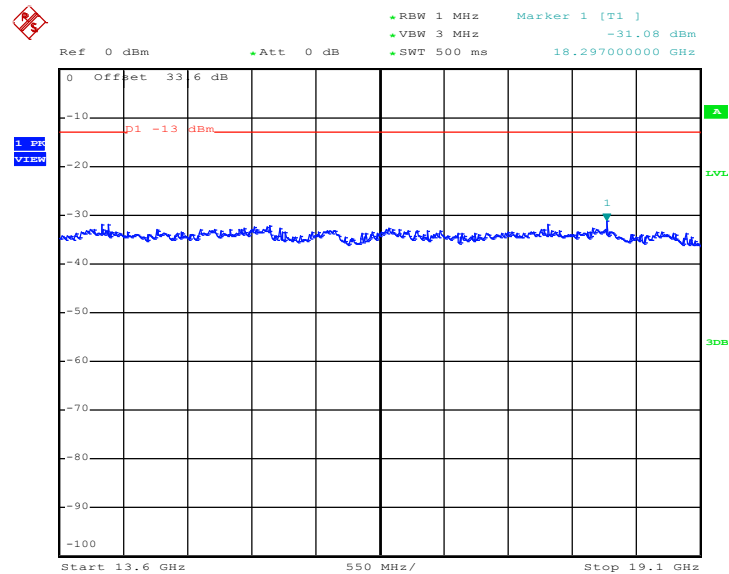


Date: 5.DEC.2013 15:36:56




Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

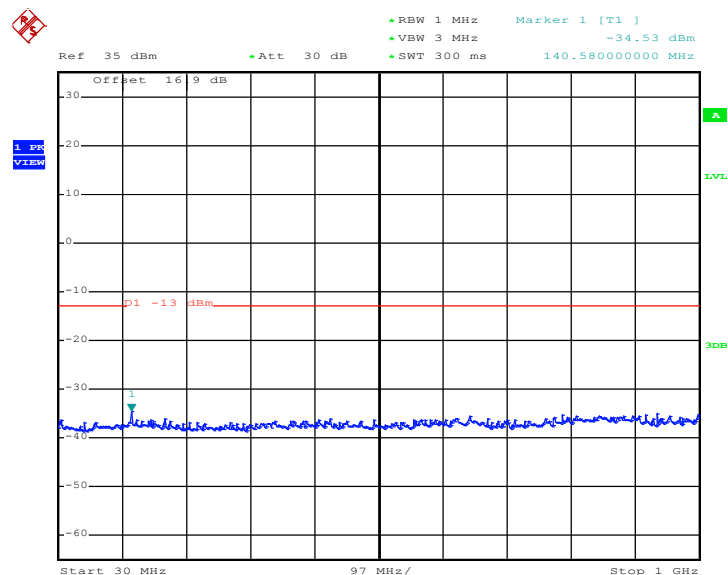


Date: 1.DEC.2013 18:33:59

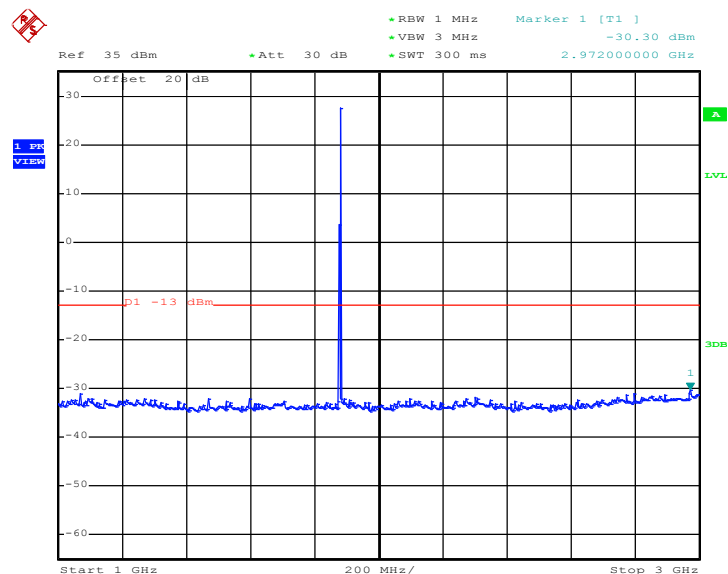Conducted Spurious Emission Plot between 1GHz ~ 3GHz


Date: 1.DEC.2013 18:34:08


Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

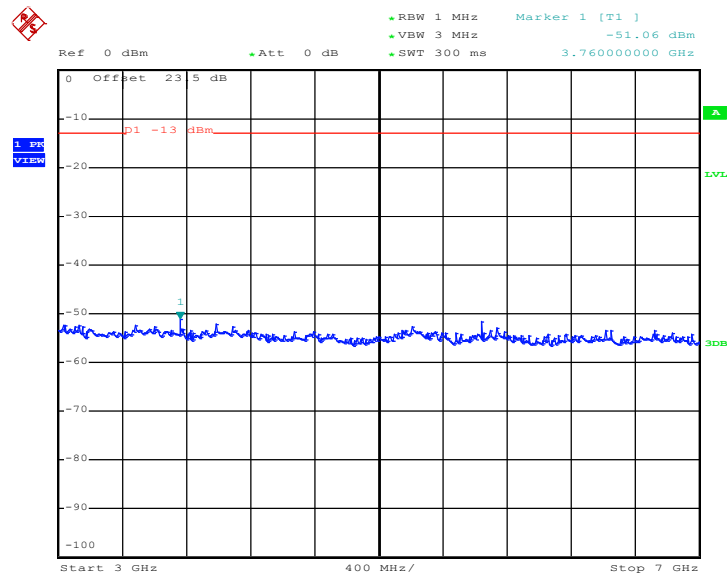Conducted Spurious Emission Plot between 3GHz ~ 7GHz


Date: 1.DEC.2013 18:34:22




Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

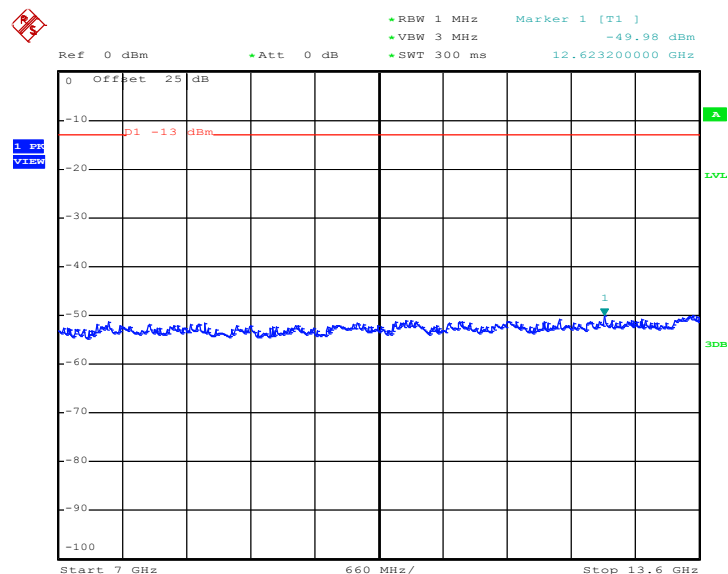

Date: 1.DEC.2013 18:34:31

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

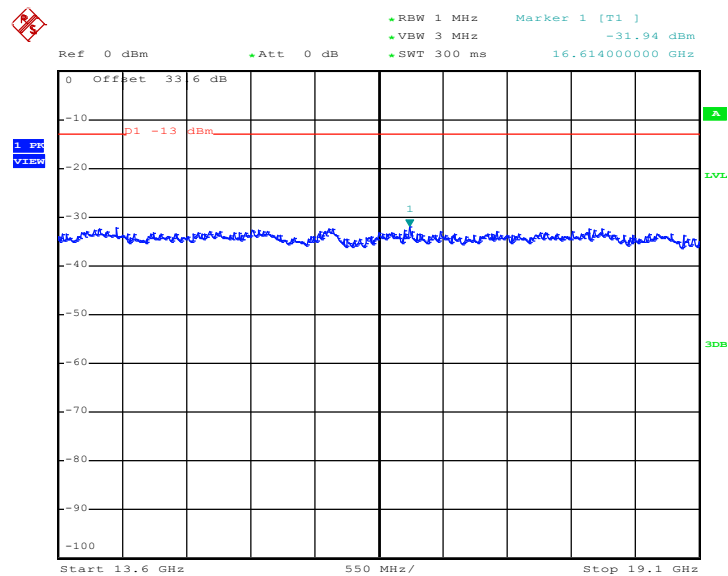


Date: 1.DEC.2013 18:34:41




Band :	GSM1900	Channel :	CH810
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1909.8 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

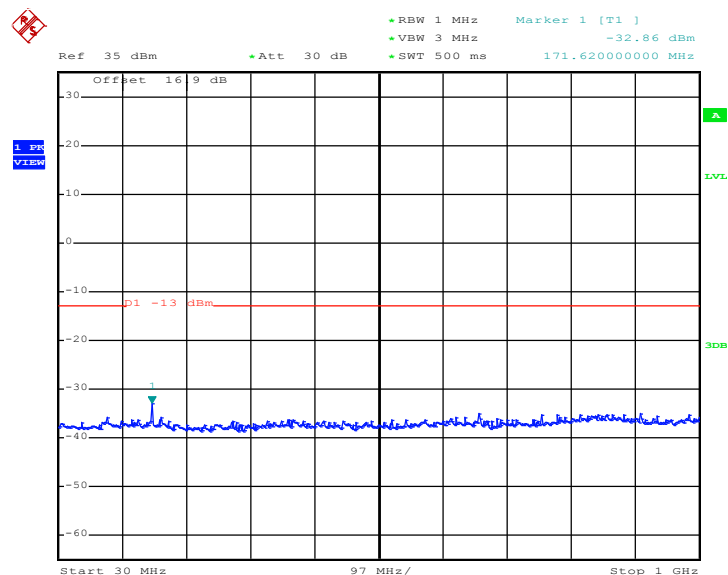


Date: 5.DEC.2013 15:38:13

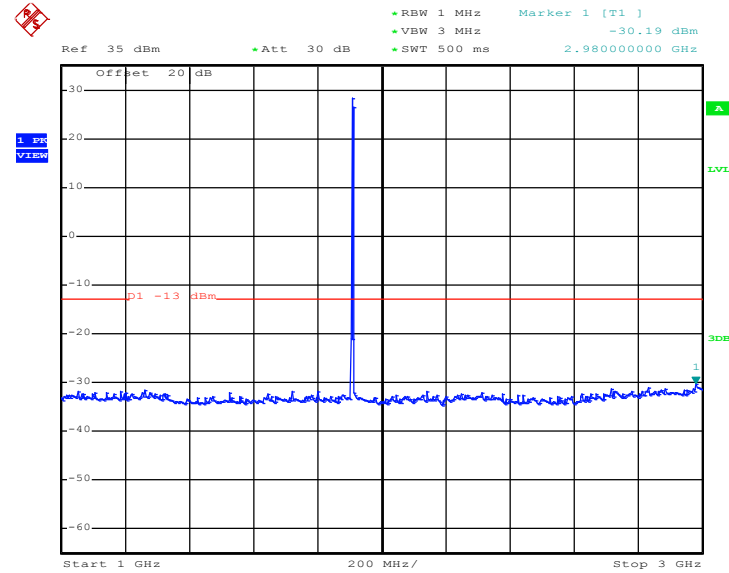Conducted Spurious Emission Plot between 1GHz ~ 3GHz


Date: 5.DEC.2013 15:38:21


Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

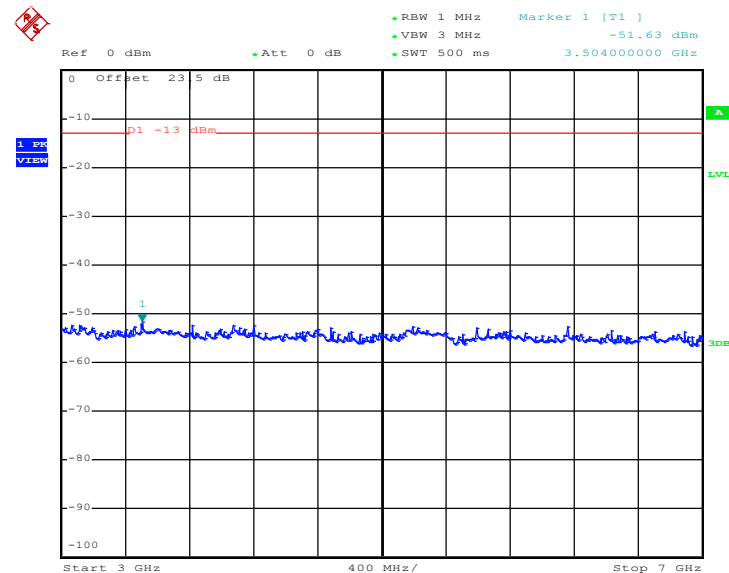Conducted Spurious Emission Plot between 3GHz ~ 7GHz


Date: 5.DEC.2013 15:38:34




Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

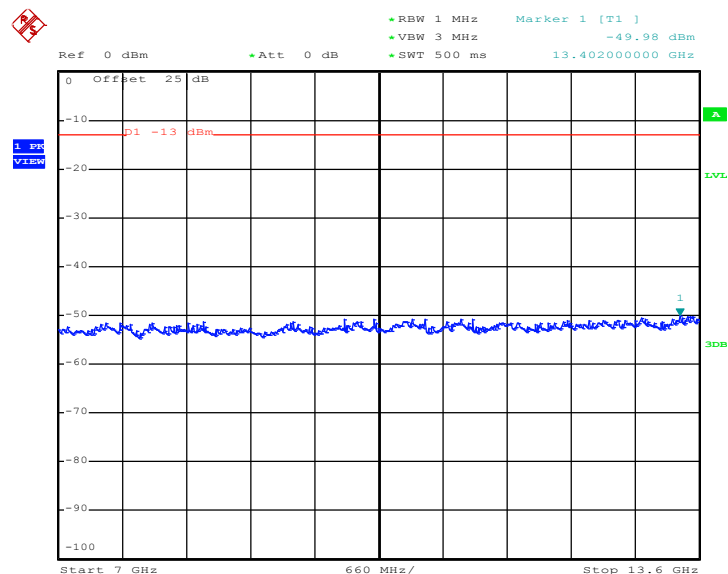


Date: 5.DEC.2013 15:38:42

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

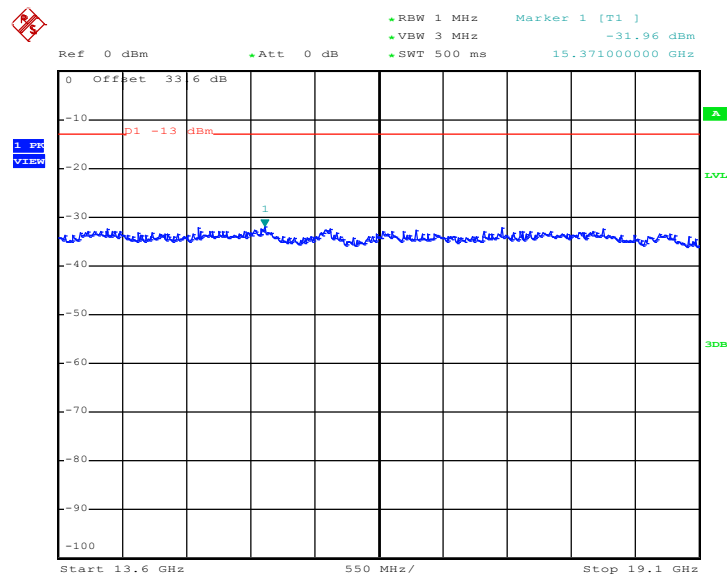

Date: 5.DEC.2013 15:38:51

Band :	WCDMA Band V	Channel :	CH4132
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	826.4 MHz

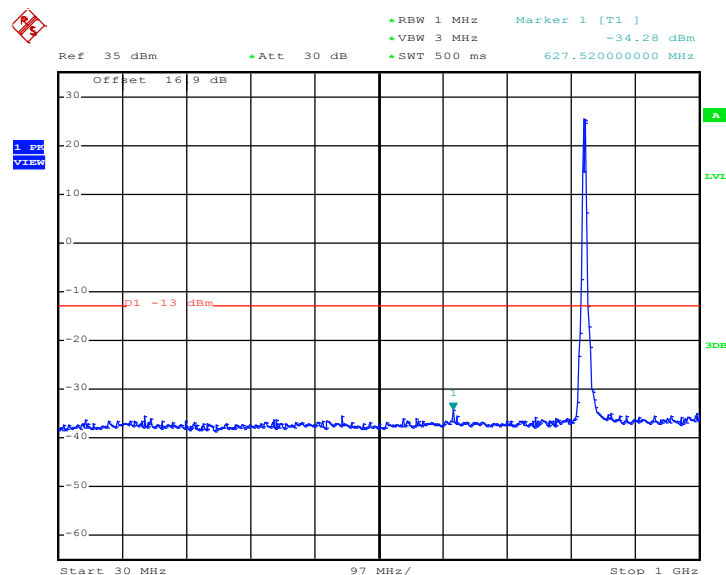
Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 5.DEC.2013 16:03:52

Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




Conducted Spurious Emission Plot between 1GHz ~ 3GHz

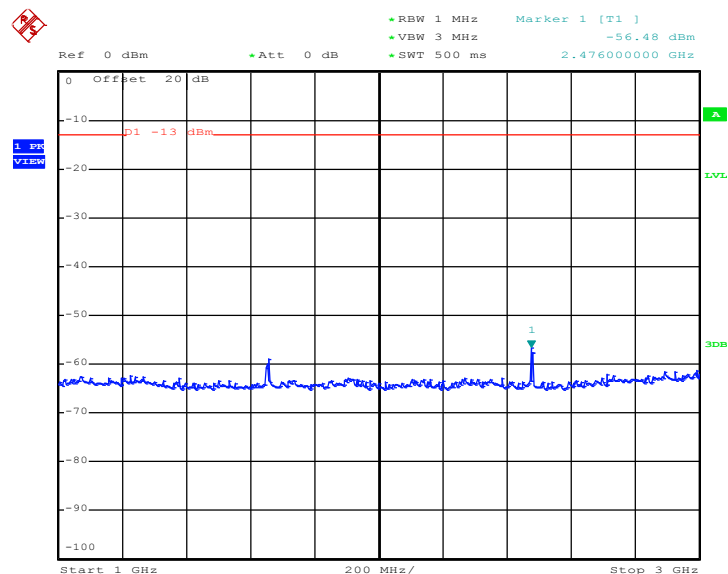

Date: 5.DEC.2013 16:04:06


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

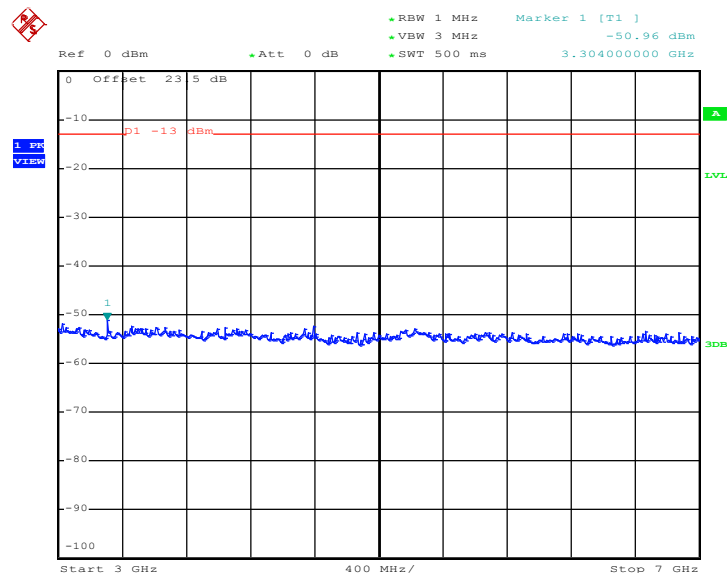

Date: 5.DEC.2013 16:04:15




Conducted Spurious Emission Plot between 7GHz ~ 9GHz

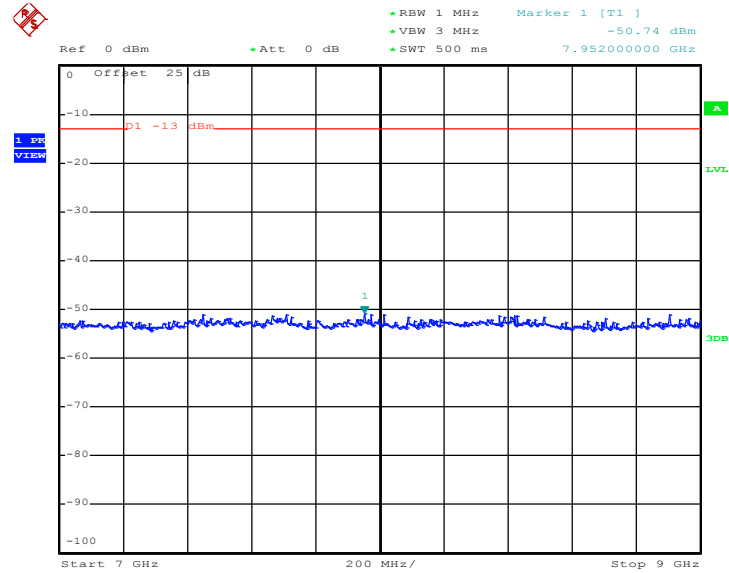

Date: 5.DEC.2013 16:04:23


Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	836.4 MHz

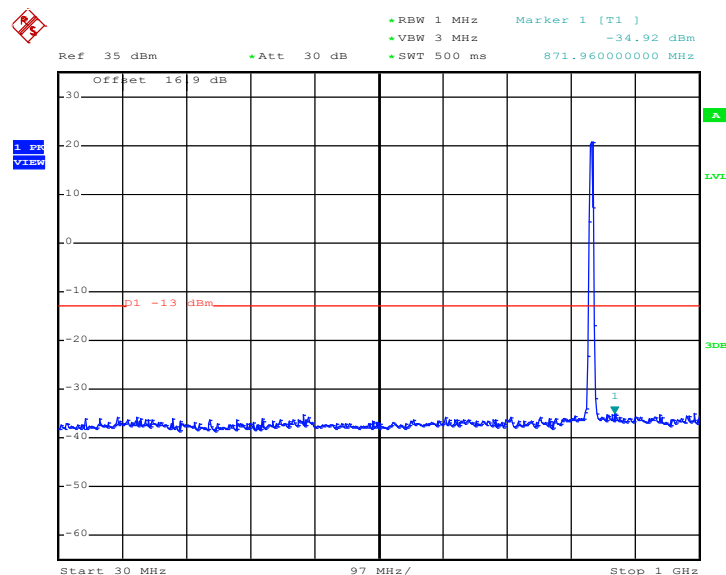Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 2.DEC.2013 11:42:40


Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

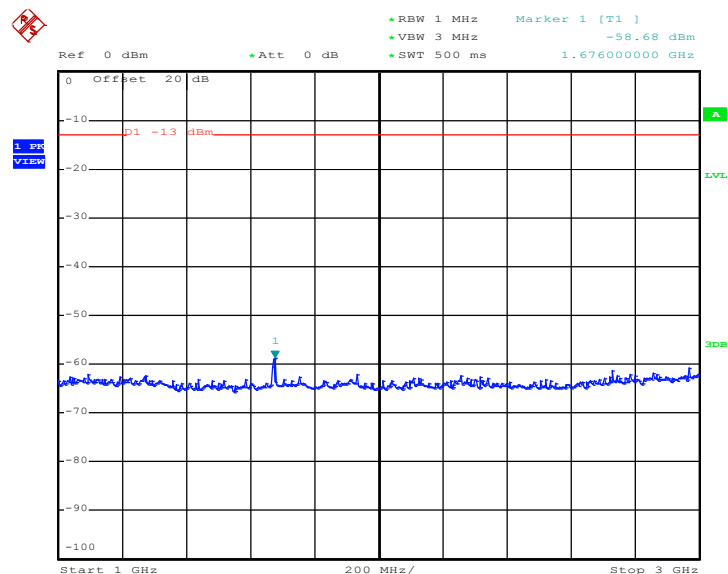

Date: 2.DEC.2013 11:42:53


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

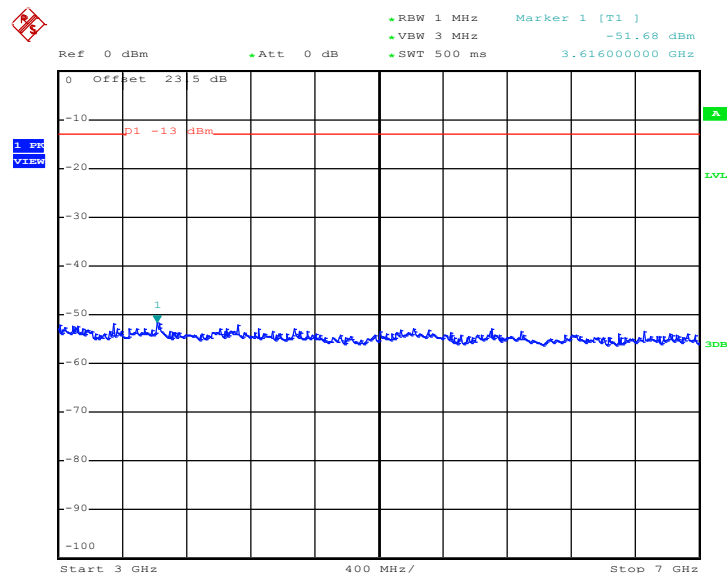

Date: 2.DEC.2013 11:43:02




Conducted Spurious Emission Plot between 7GHz ~ 9GHz

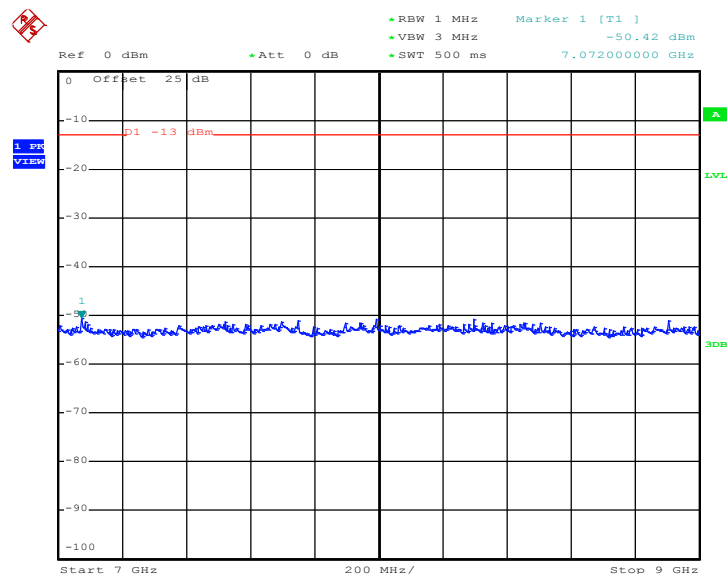

Date: 2.DEC.2013 11:43:12

Band :	WCDMA Band V	Channel :	CH4233
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	846.6 MHz

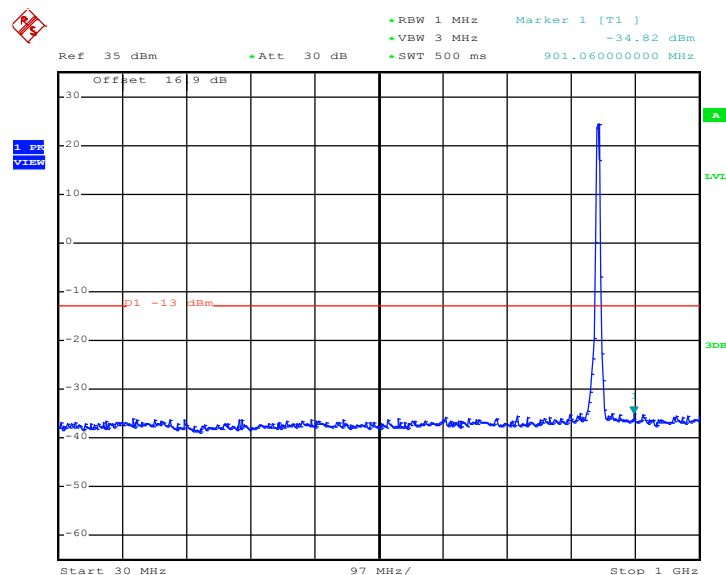
Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 5.DEC.2013 16:09:38

Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.




Conducted Spurious Emission Plot between 1GHz ~ 3GHz

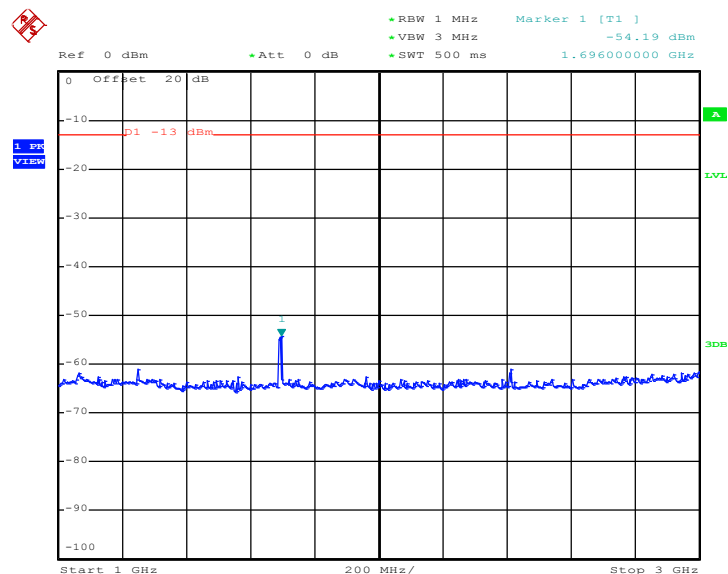

Date: 5.DEC.2013 16:09:50


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

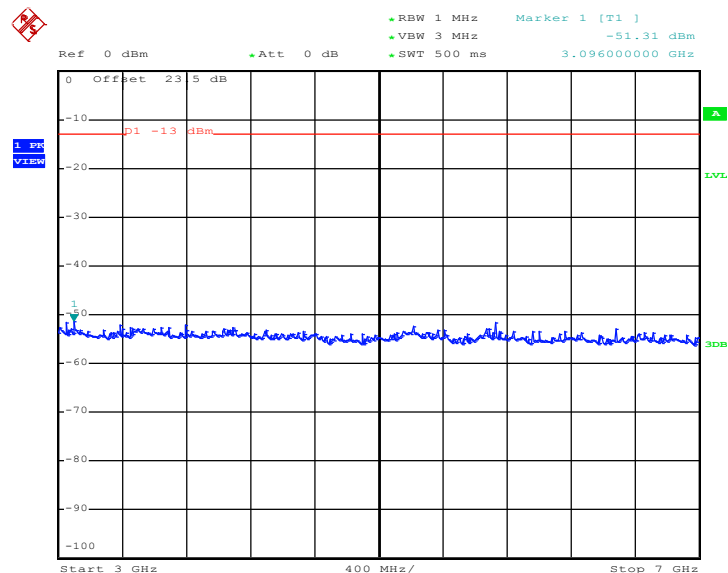

Date: 5.DEC.2013 16:09:58



Conducted Spurious Emission Plot between 7GHz ~ 9GHz

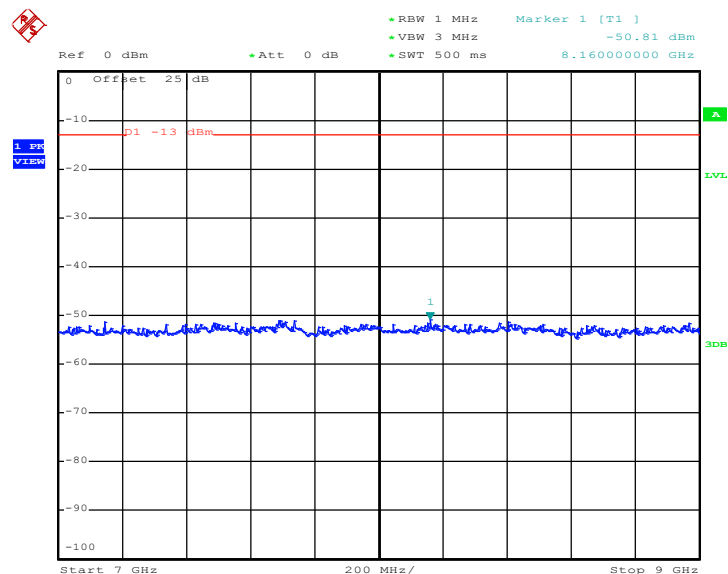


Date: 5.DEC.2013 16:10:07




Band :	WCDMA Band IV	Channel :	CH1312
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1712.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

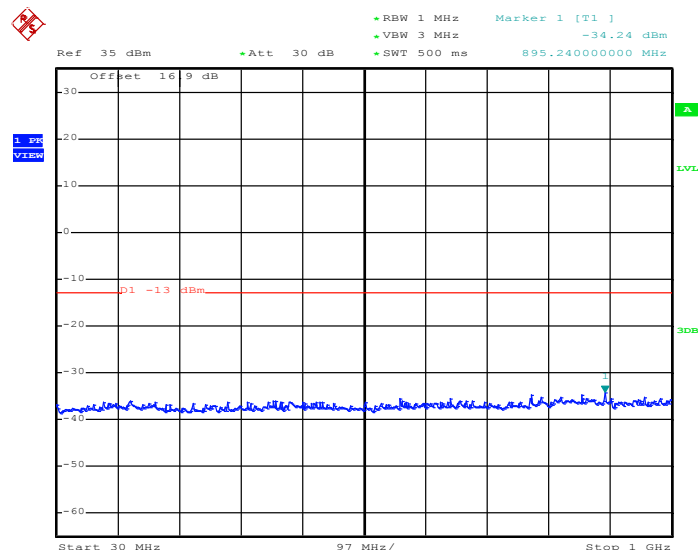

Date: 5.DEC.2013 15:55:09


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

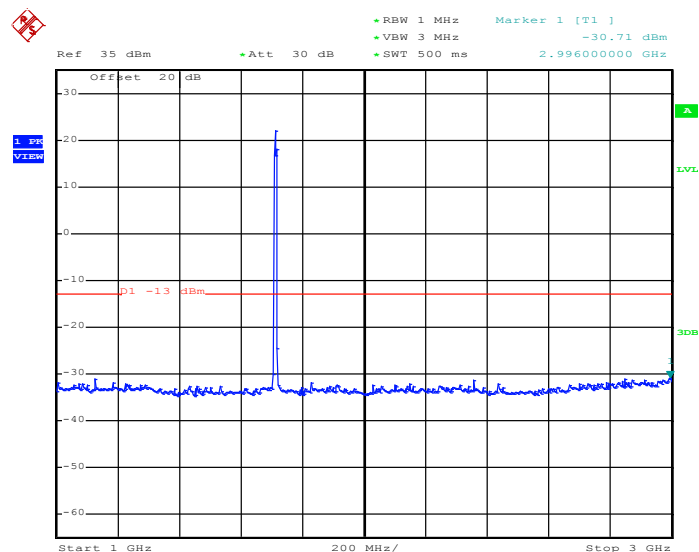

Date: 5.DEC.2013 15:55:18


Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

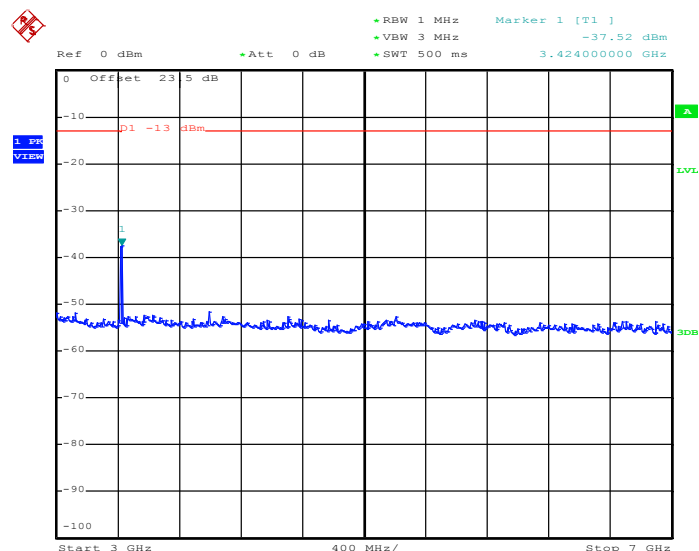


Date: 5.DEC.2013 15:55:29

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

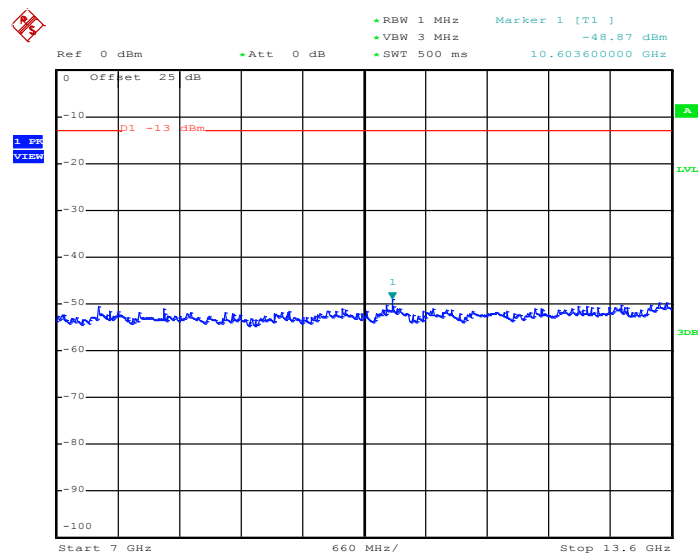

Date: 5.DEC.2013 15:55:38

Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz

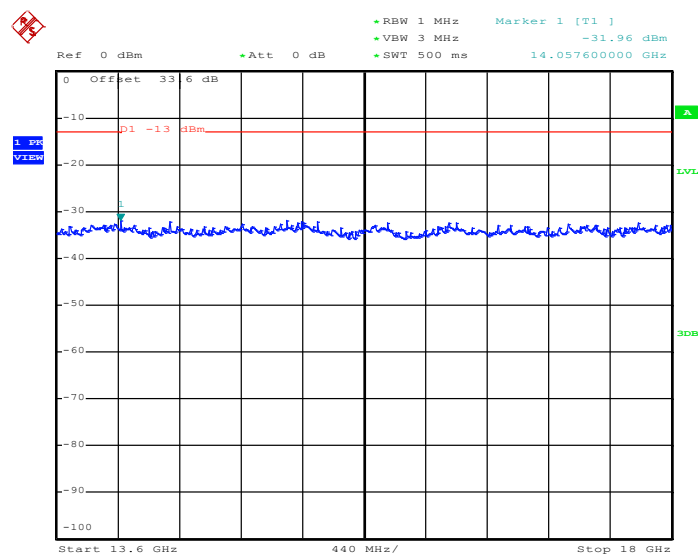


Date: 5.DEC.2013 15:55:46




Band :	WCDMA Band IV	Channel :	CH1413
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1732.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

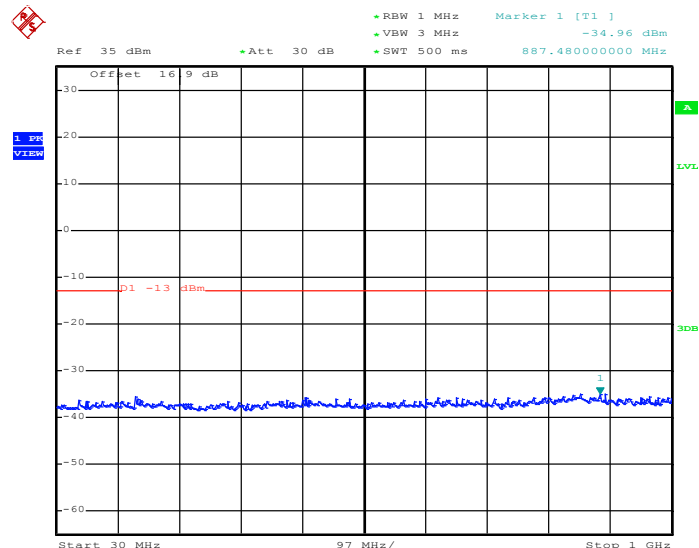

Date: 5.DEC.2013 15:53:19


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

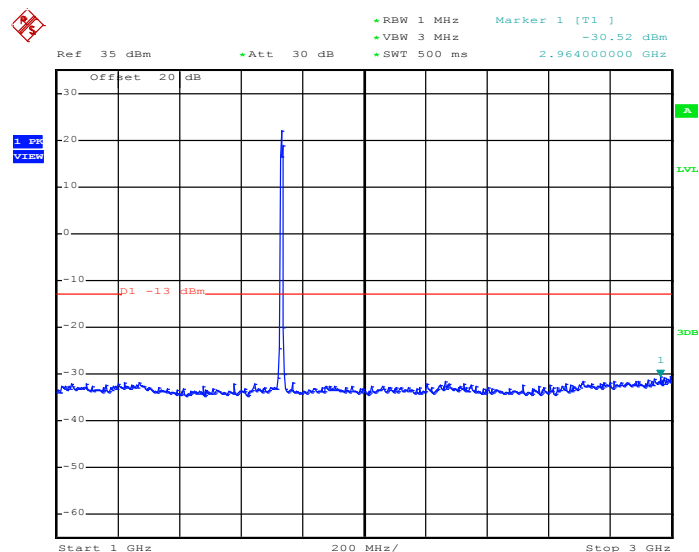

Date: 5.DEC.2013 15:53:28


Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

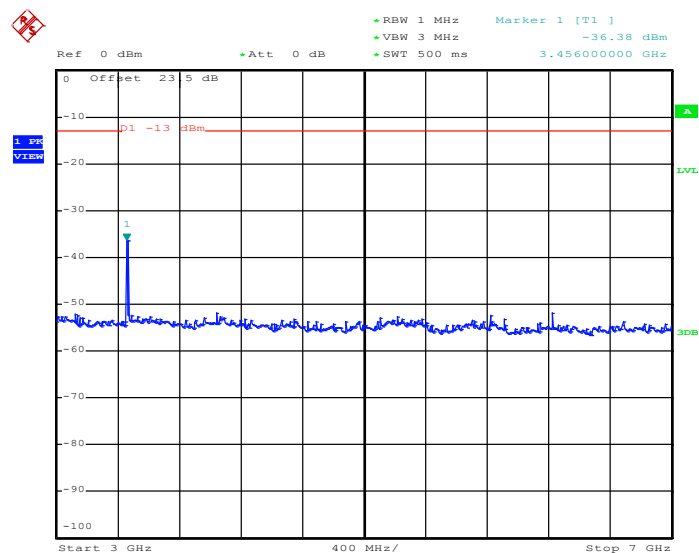


Date: 5.DEC.2013 15:53:41

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

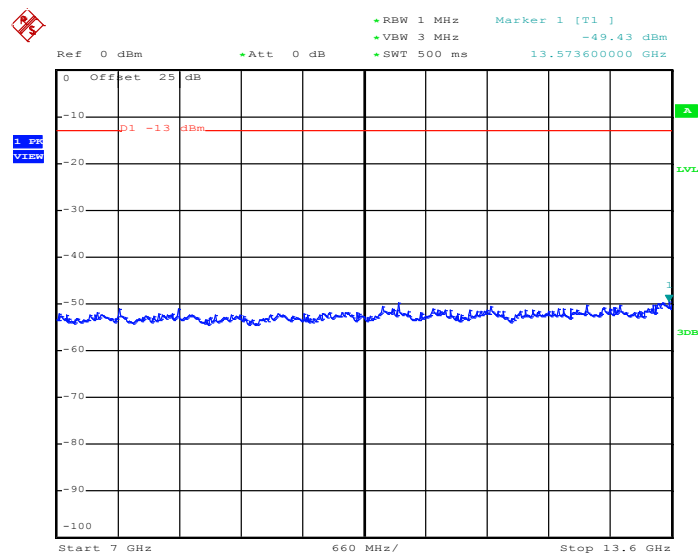

Date: 5.DEC.2013 15:53:49

Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz

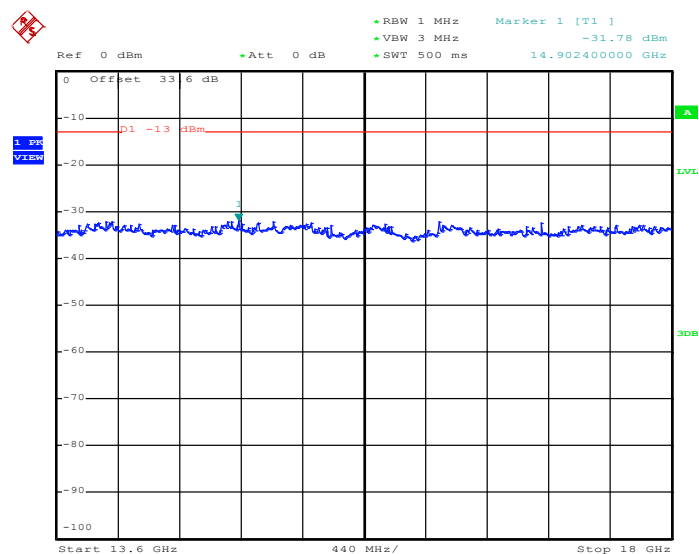


Date: 5.DEC.2013 15:53:57




Band :	WCDMA Band IV	Channel :	CH1513
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1752.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

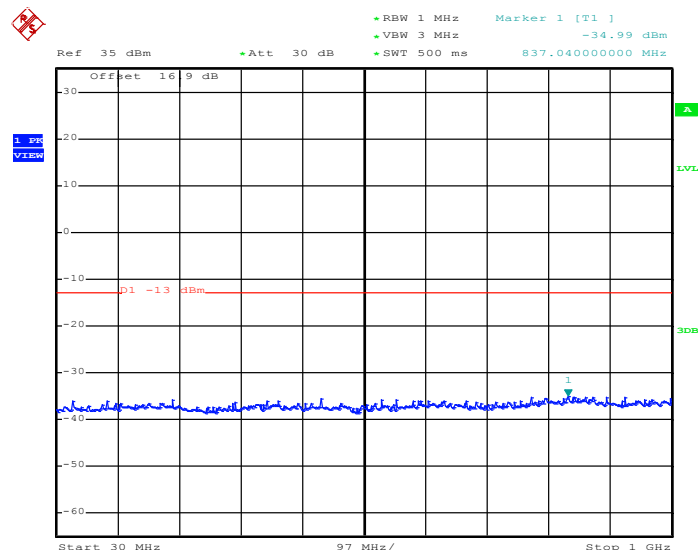

Date: 5.DEC.2013 15:57:06


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

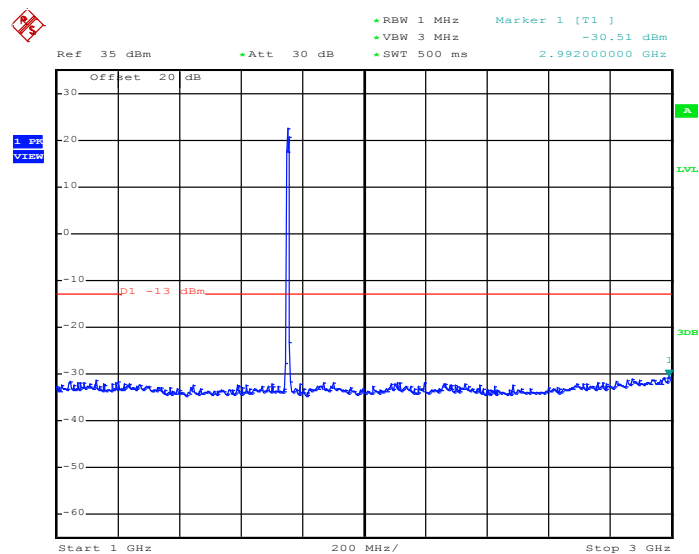

Date: 5.DEC.2013 15:57:14

Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

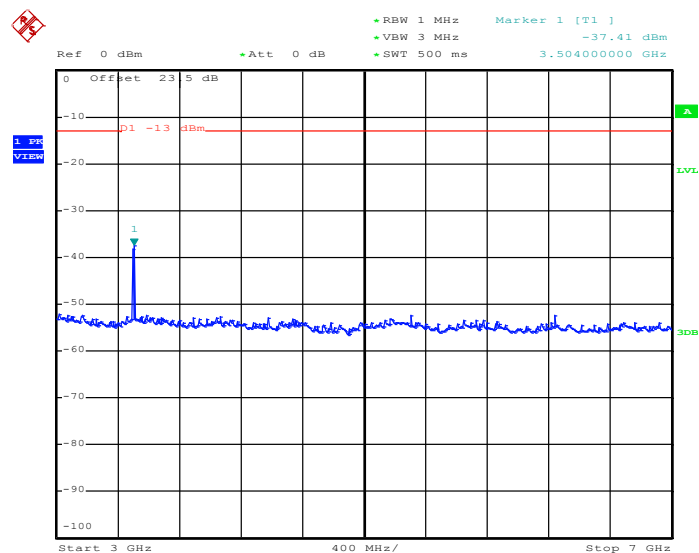

Date: 5.DEC.2013 15:57:27




Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

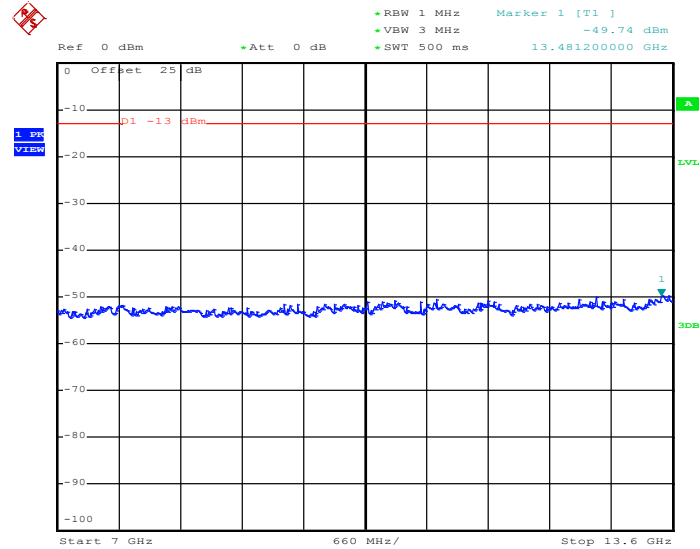

Date: 5.DEC.2013 15:57:35

Conducted Spurious Emission Plot between 13.6GHz ~ 18GHz

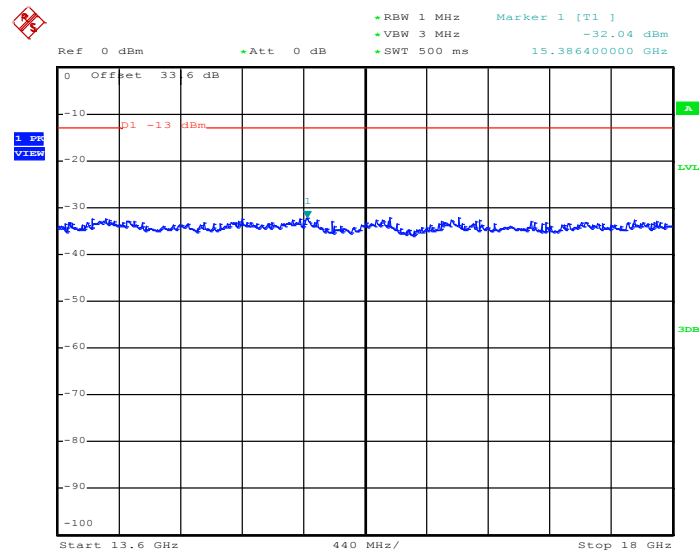


Date: 5.DEC.2013 15:57:43




Band :	WCDMA Band II	Channel :	CH9262
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1852.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

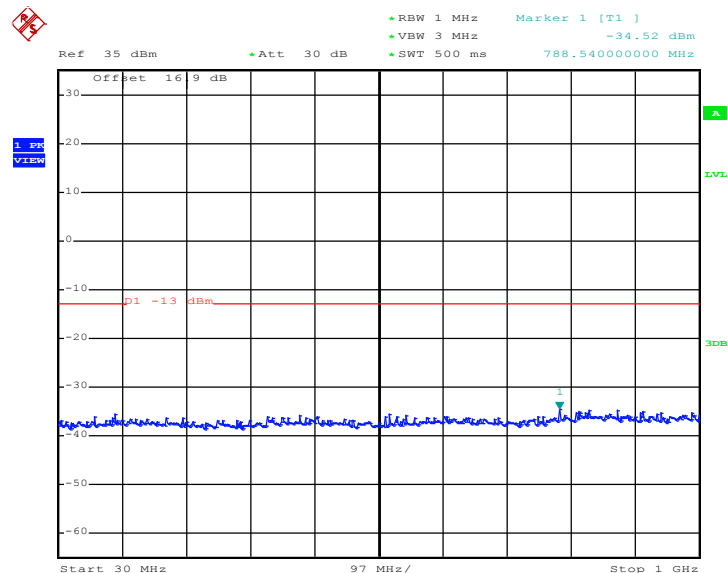

Date: 5.DEC.2013 15:44:58


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

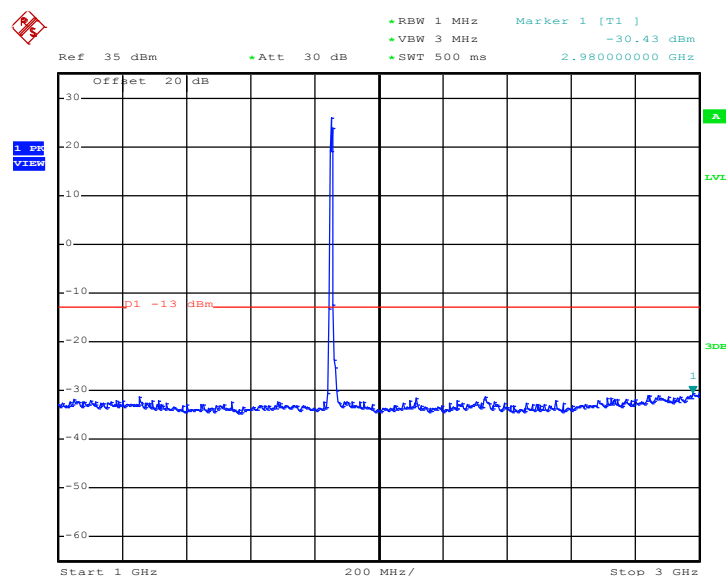

Date: 5.DEC.2013 15:45:06

Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


Conducted Spurious Emission Plot between 3GHz ~ 7GHz

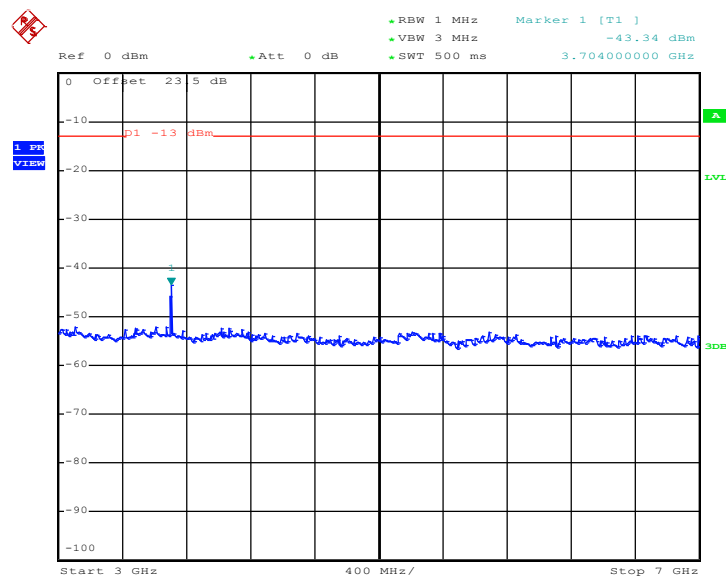

Date: 5.DEC.2013 15:45:20




Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

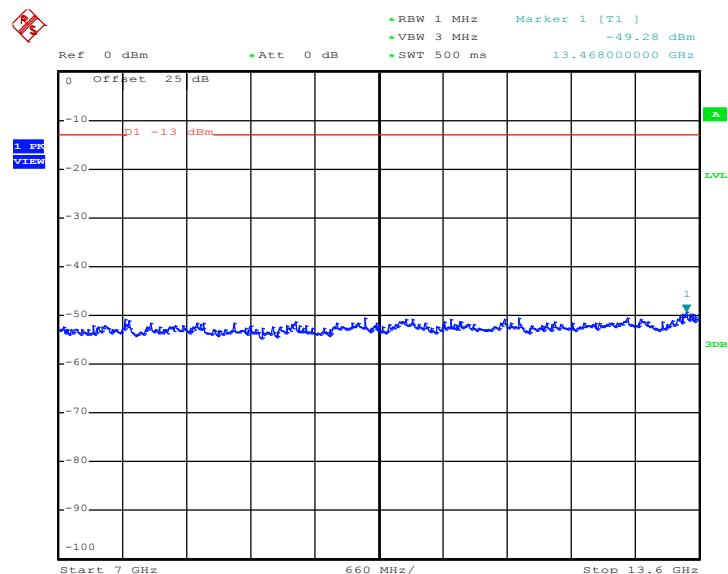

Date: 5.DEC.2013 15:45:29

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

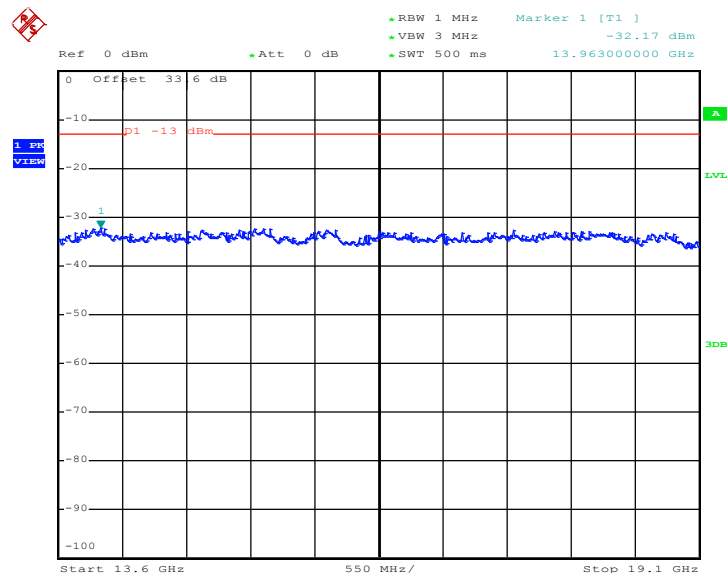


Date: 5.DEC.2013 15:45:37




Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

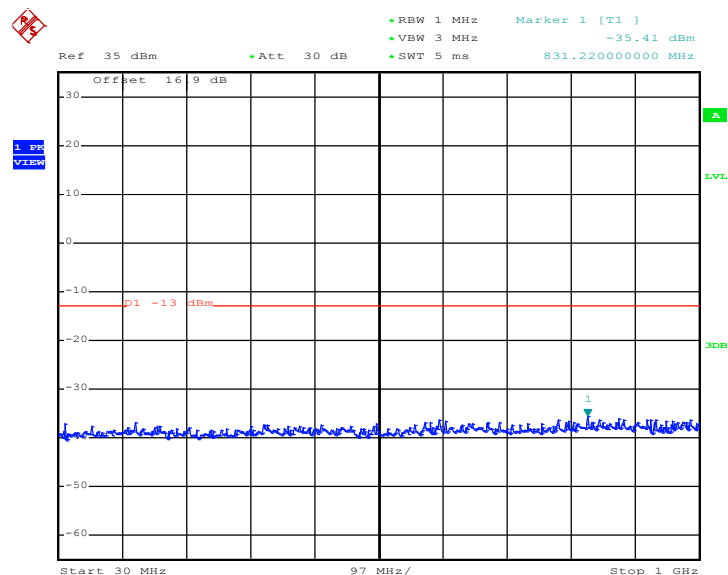

Date: 2.DEC.2013 10:57:13


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

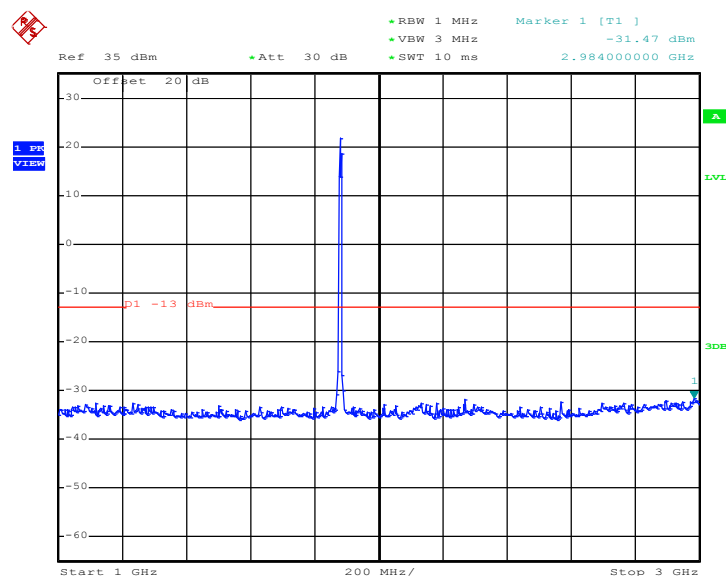

Date: 2.DEC.2013 10:57:23


Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

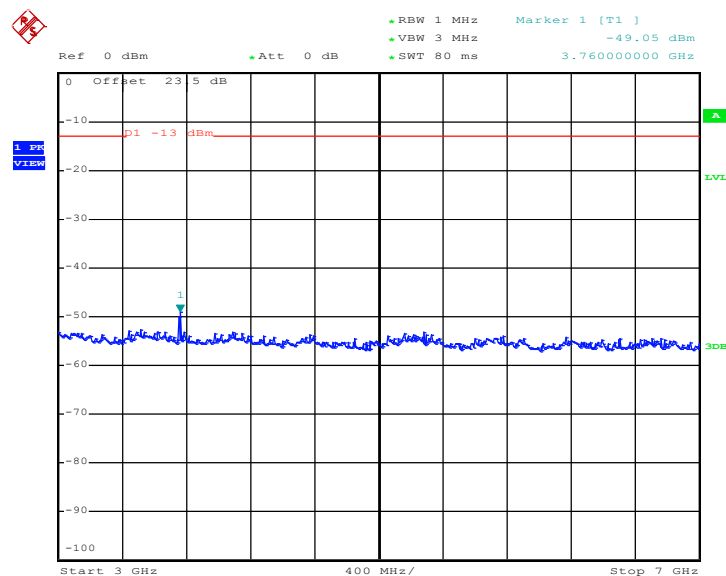


Date: 2.DEC.2013 10:57:39

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

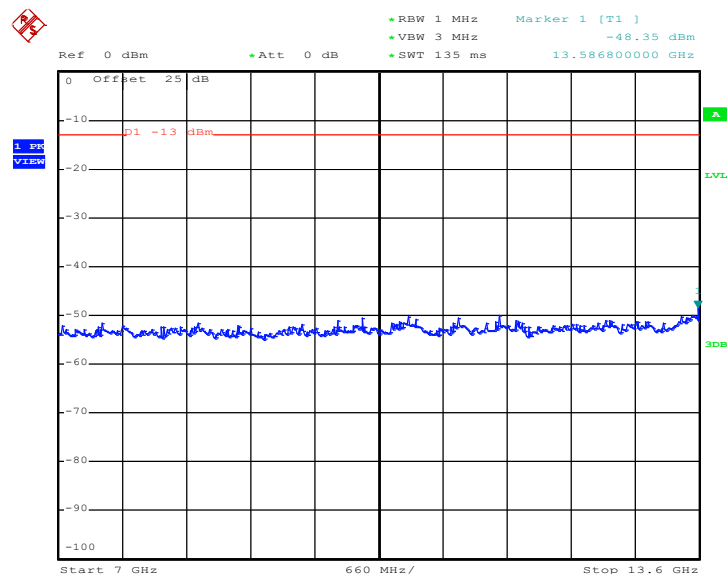

Date: 2.DEC.2013 10:57:48

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

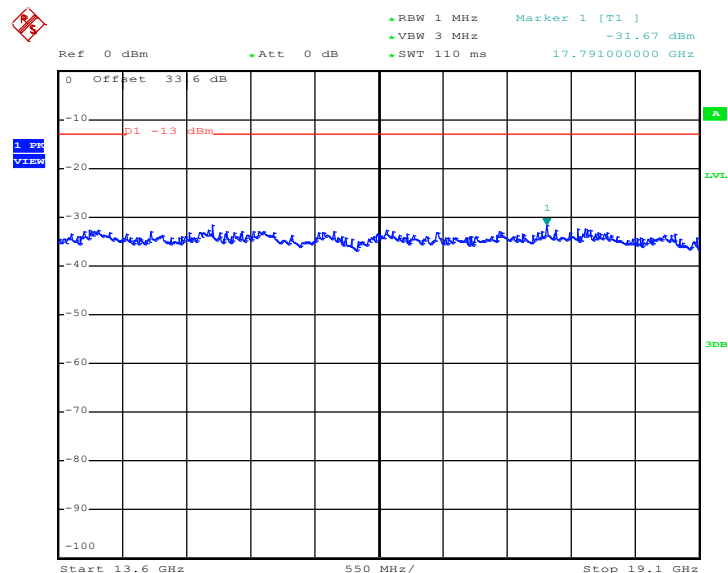


Date: 2.DEC.2013 10:57:58




Band :	WCDMA Band II	Channel :	CH9538
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1907.6 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

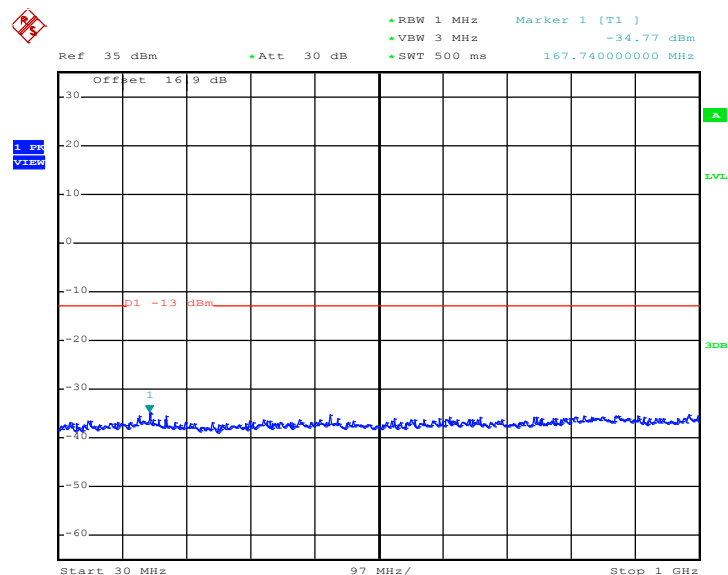

Date: 5.DEC.2013 15:47:05


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

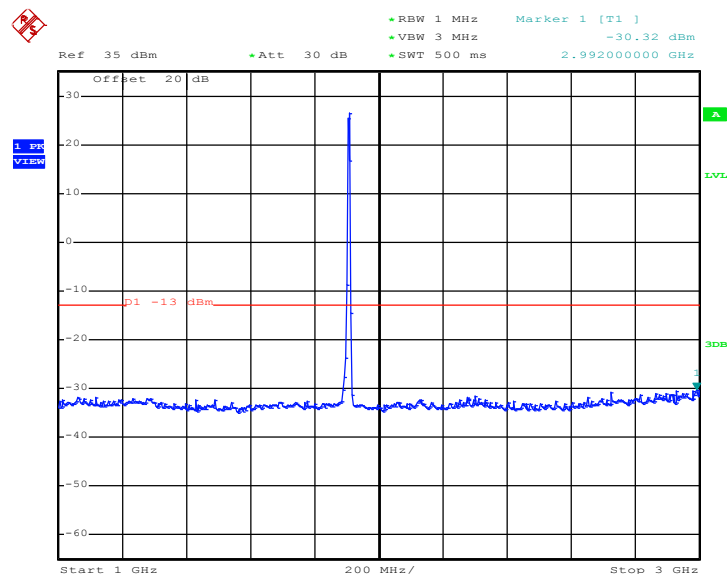

Date: 5.DEC.2013 15:47:13


Note: The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Conducted Spurious Emission Plot between 3GHz ~ 7GHz

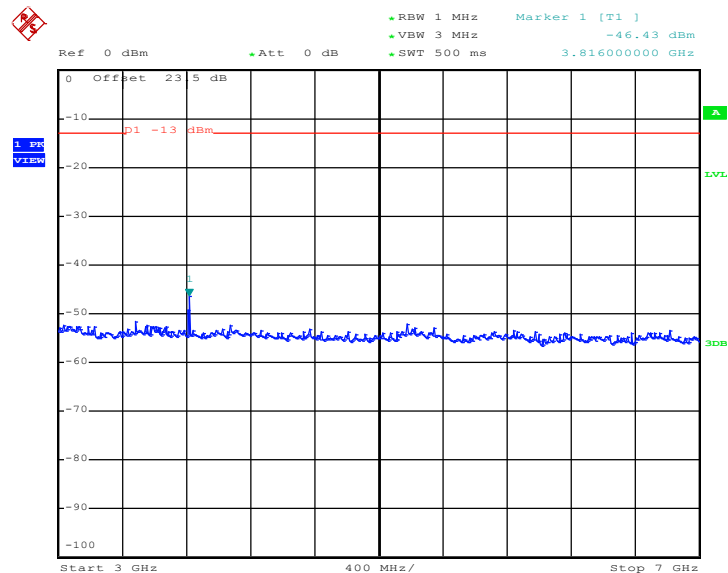


Date: 5.DEC.2013 15:47:28

Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

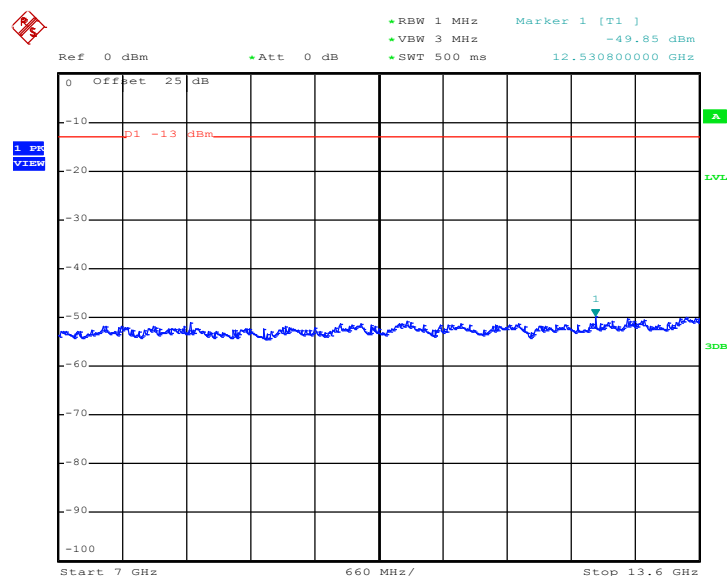

Date: 5.DEC.2013 15:47:36

Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

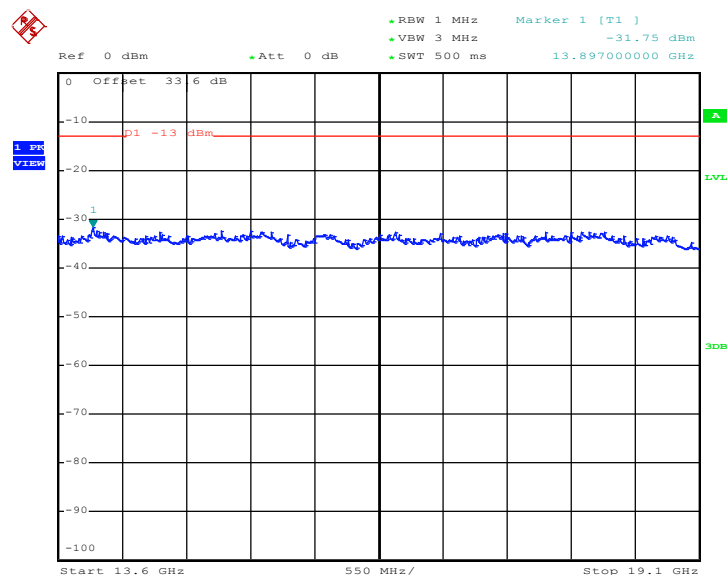

Date: 5.DEC.2013 15:47:44

3.7 Field Strength of Spurious Radiation Measurement

3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$
12. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
13. $\text{ERP (dBm)} = \text{EIRP} - 2.15$

3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

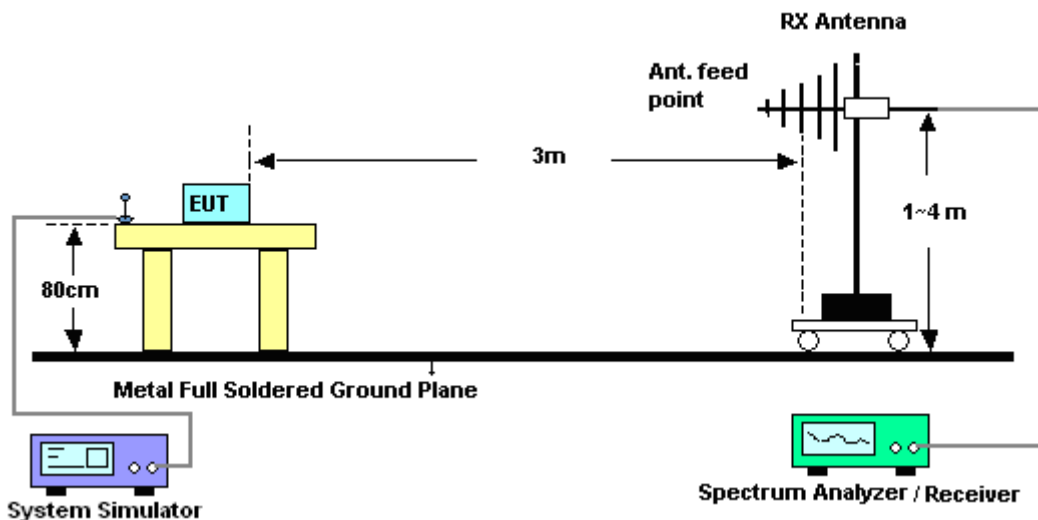

For radiated emissions above 1GHz

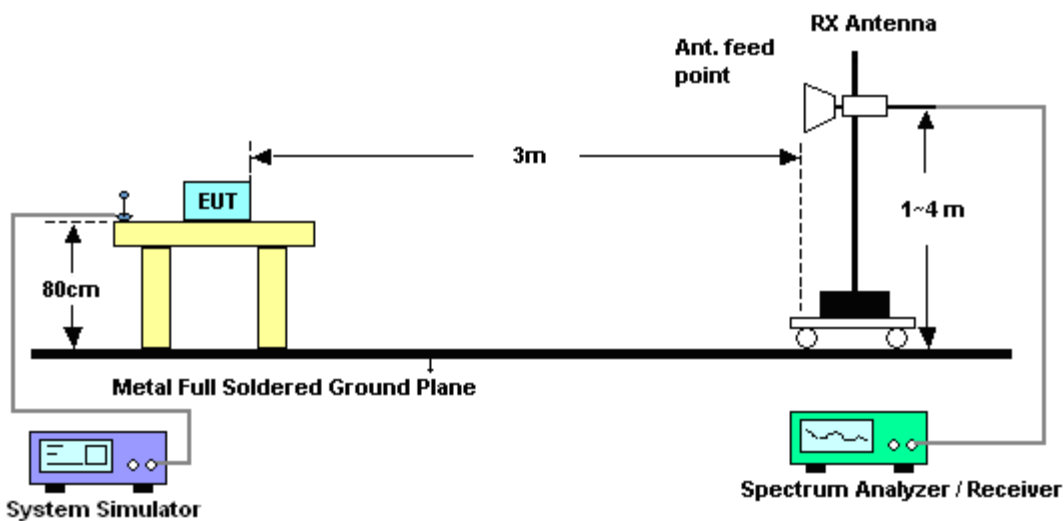


3.7.5 Test Result of Field Strength of Spurious Radiated

<Low Channel>

Band :	GSM850	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	128	Polarization :	Horizontal
Test Engineer :	Eric Shih		

Remark :	- Spurious emissions within 30-1000MHz were found more than 20dB below limit line. - The harmonic (5th, 6th, 7th, ...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.
-----------------	--

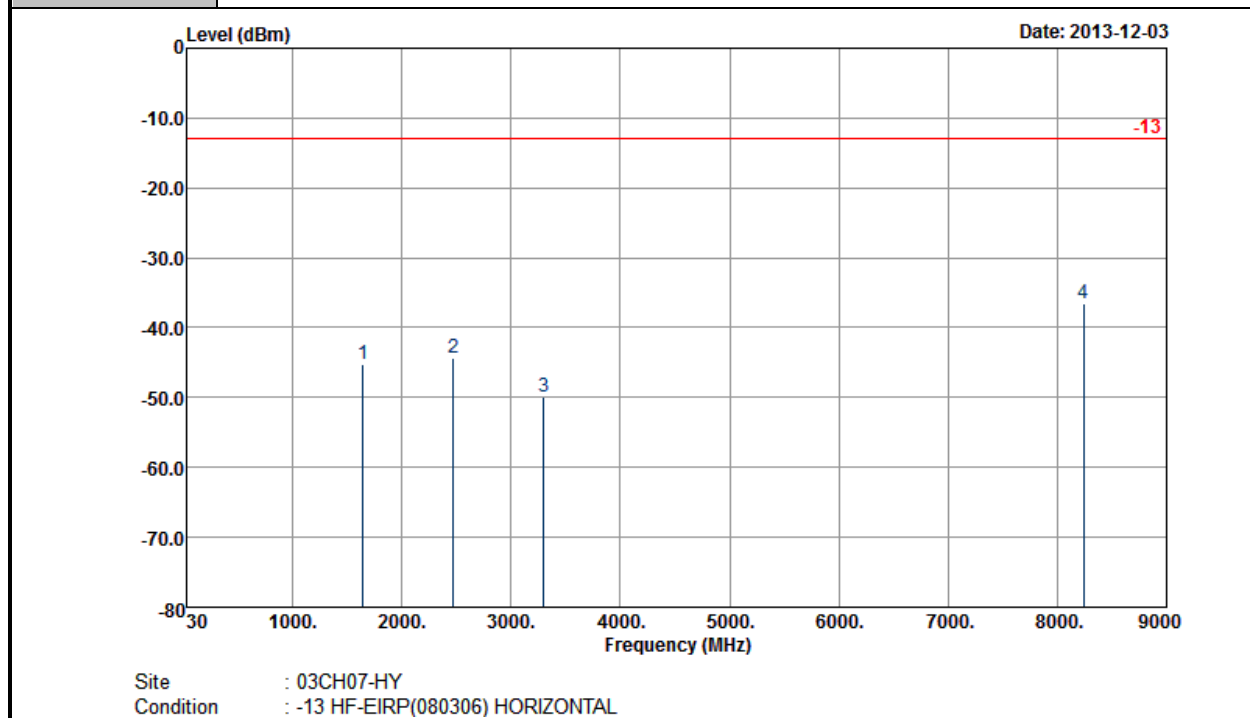


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-45.22	-13	-32.22	-54.04	-49.22	1.53	5.53	H	Pass
2472	-44.40	-13	-31.40	-57.49	-48.49	2.06	6.15	H	Pass
3296	-49.91	-13	-36.91	-63.97	-55.36	2.48	7.93	H	Pass
8240	-36.64	-13	-23.64	-61.14	-45.78	3.66	12.80	H	Pass

Other harmonics are lower than background noise

Band :	GSM850	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	128	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The harmonic (5th, 6th, 7th, ...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

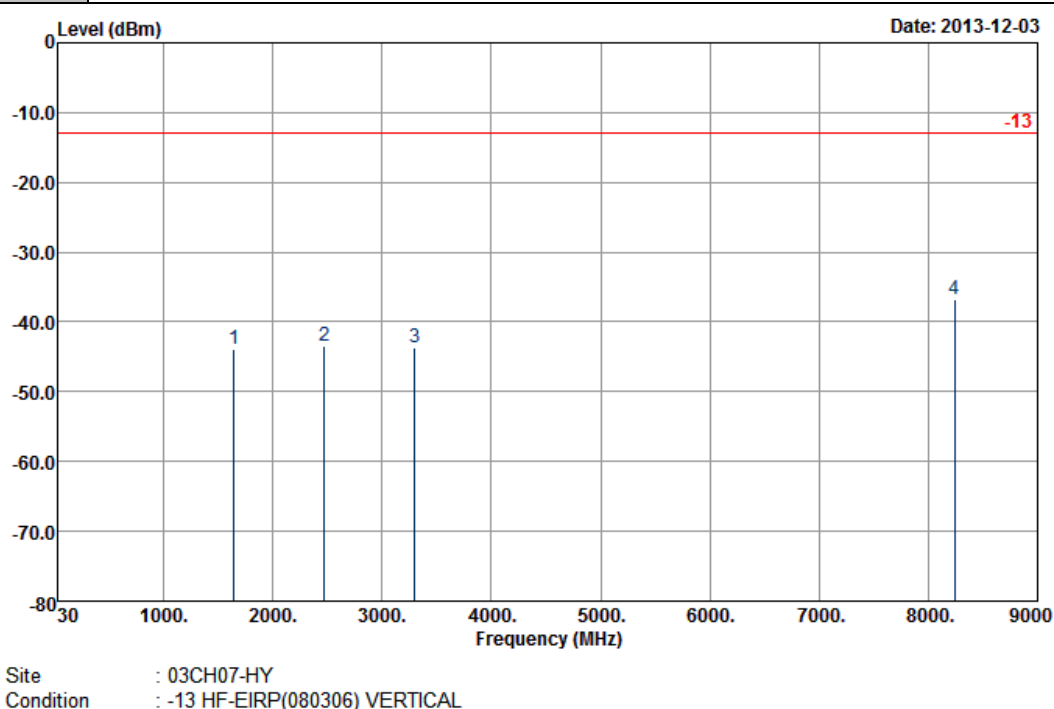


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-43.88	-13	-30.88	-54.92	-47.88	1.53	5.53	V	Pass
2472	-43.36	-13	-30.36	-56.87	-47.45	2.06	6.15	V	Pass
3296	-43.78	-13	-30.78	-59.47	-49.23	2.48	7.93	V	Pass
8240	-36.72	-13	-23.72	-61.04	-45.86	3.66	12.80	V	Pass

Other harmonics are lower than background noise

<Middle Channel>

Band :	GSM850	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	189	Polarization :	Horizontal
Test Engineer :	Eric Shih		
Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th , ...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

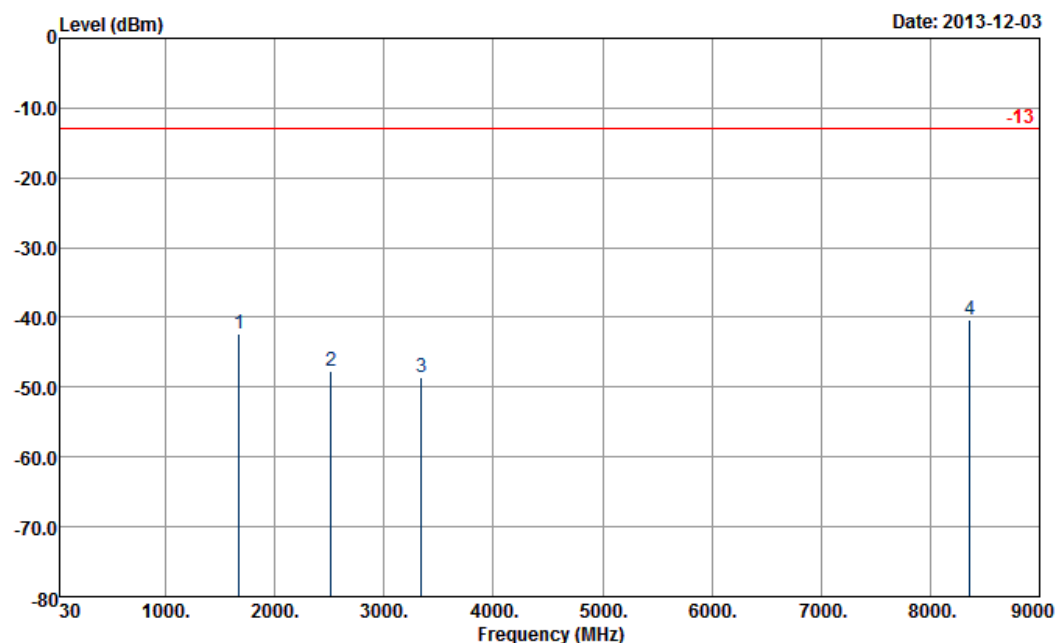

Site : 03CH07-HY
 Condition : -13 HF-EIRP(080306) HORIZONTAL


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-42.25	-13	-29.25	-51.21	-46.12	1.62	5.49	H	Pass
2512	-47.74	-13	-34.74	-61.06	-51.86	2.1	6.22	H	Pass
3344	-48.58	-13	-35.58	-62.65	-53.62	3.03	8.07	H	Pass
8360	-40.24	-13	-27.24	-65.24	-49.23	3.95	12.94	H	Pass

Other harmonics are lower than background noise

Band :	GSM850	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	189	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The harmonic (5th, 6th, 7th, ...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

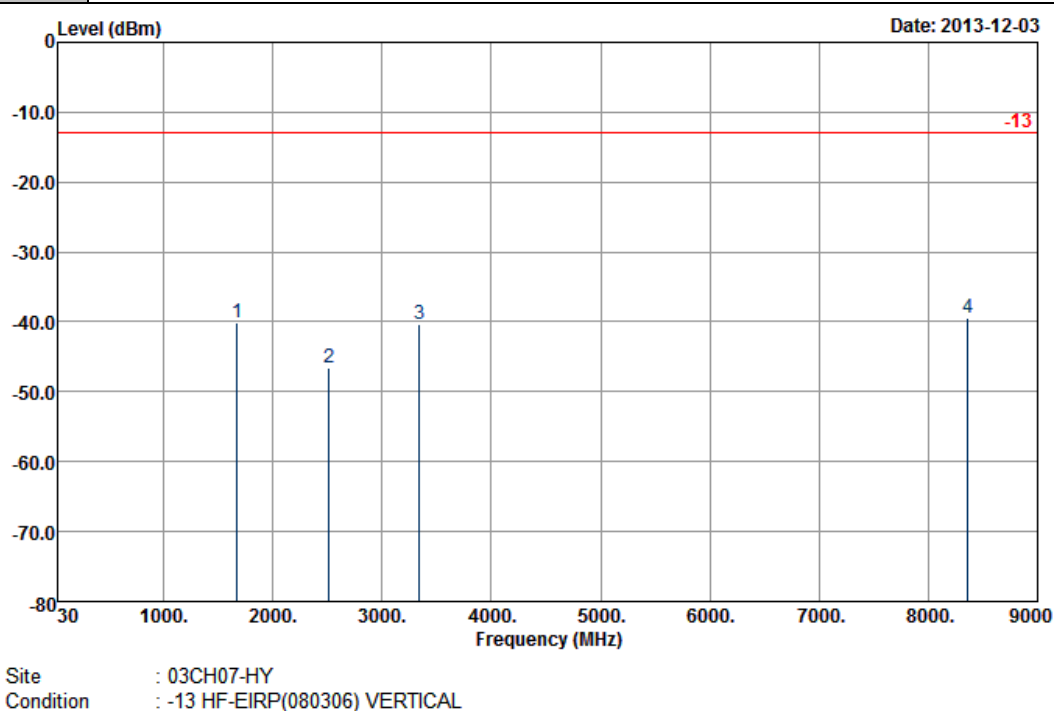


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-40.13	-13	-27.13	-51.18	-44	1.62	5.49	V	Pass
2512	-46.67	-13	-33.67	-60.51	-50.79	2.1	6.22	V	Pass
3344	-40.38	-13	-27.38	-55.81	-45.42	3.03	8.07	V	Pass
8360	-39.34	-13	-26.34	-63.99	-48.33	3.95	12.94	V	Pass

Other harmonics are lower than background noise

<High Channel>

Band :	GSM850	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	251	Polarization :	Horizontal
Test Engineer :	Eric Shih		
Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th , ...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

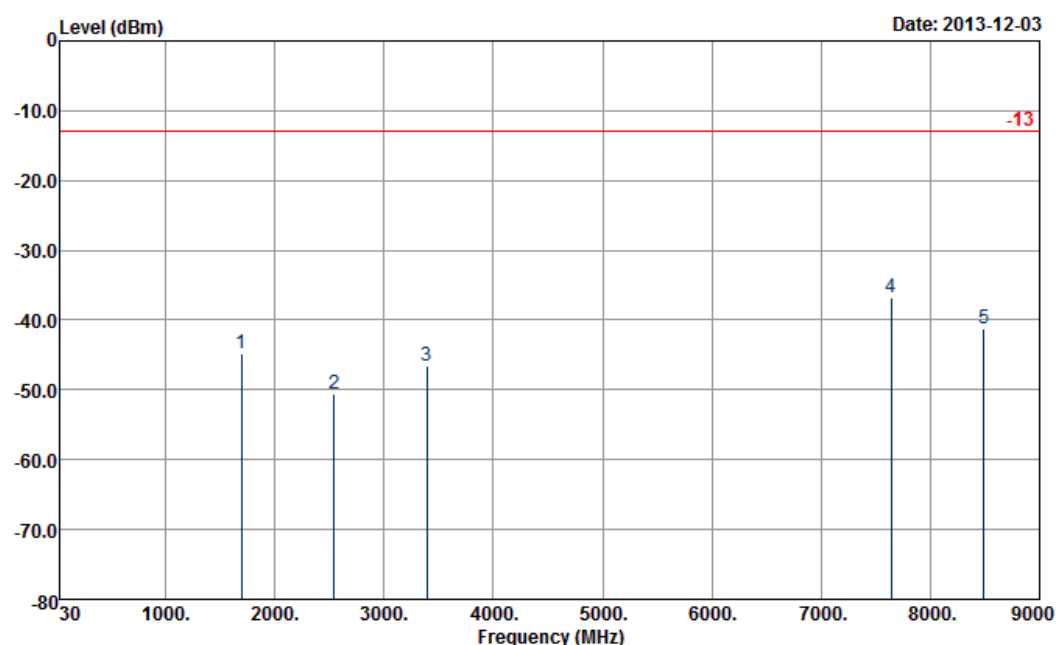

Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-44.68	-13	-31.68	-53.78	-48.56	1.57	5.45	H	Pass
2544	-50.61	-13	-37.61	-63.86	-54.87	2.02	6.28	H	Pass
3392	-46.63	-13	-33.63	-60.91	-52.53	2.3	8.20	H	Pass
7640	-36.73	-13	-23.73	-63.31	-45.45	3.49	12.21	H	Pass
8488	-41.32	-13	-28.32	-66.52	-50.55	3.85	13.08	H	Pass

Other harmonics are lower than background noise

Band :	GSM850	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	251	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5th, 7th, 8th) and other spurious are not reported, because those levels are lower than average limit line and background noise.

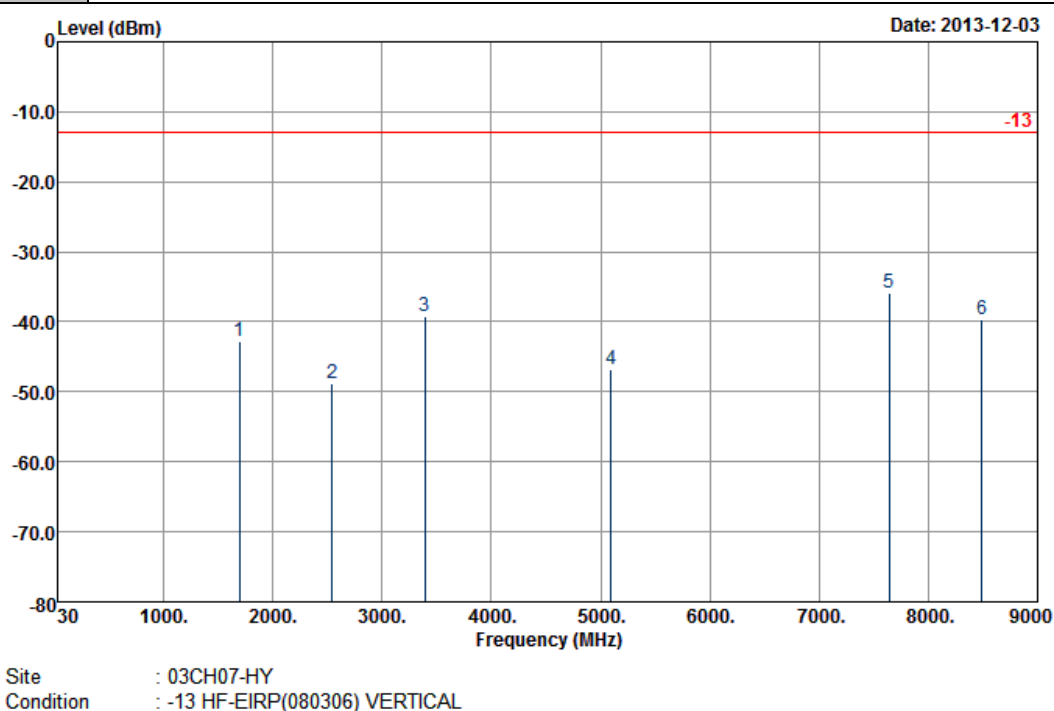


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-42.72	-13	-29.72	-54.01	-46.6	1.57	5.45	V	Pass
2544	-48.74	-13	-35.74	-62.61	-53	2.02	6.28	V	Pass
3392	-39.31	-13	-26.31	-54.93	-45.21	2.3	8.20	V	Pass
5096	-46.87	-13	-33.87	-65.38	-54.49	2.75	10.37	V	Pass
7640	-35.94	-13	-22.94	-62	-44.66	3.49	12.21	V	Pass
8488	-39.65	-13	-26.65	-64.76	-48.88	3.85	13.08	V	Pass

Other harmonics are lower than background noise

<Low Channel>


Band :	GSM850	Temperature :	21~23°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	128	Polarization :	Horizontal
Test Engineer :	Eric Shih		
Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

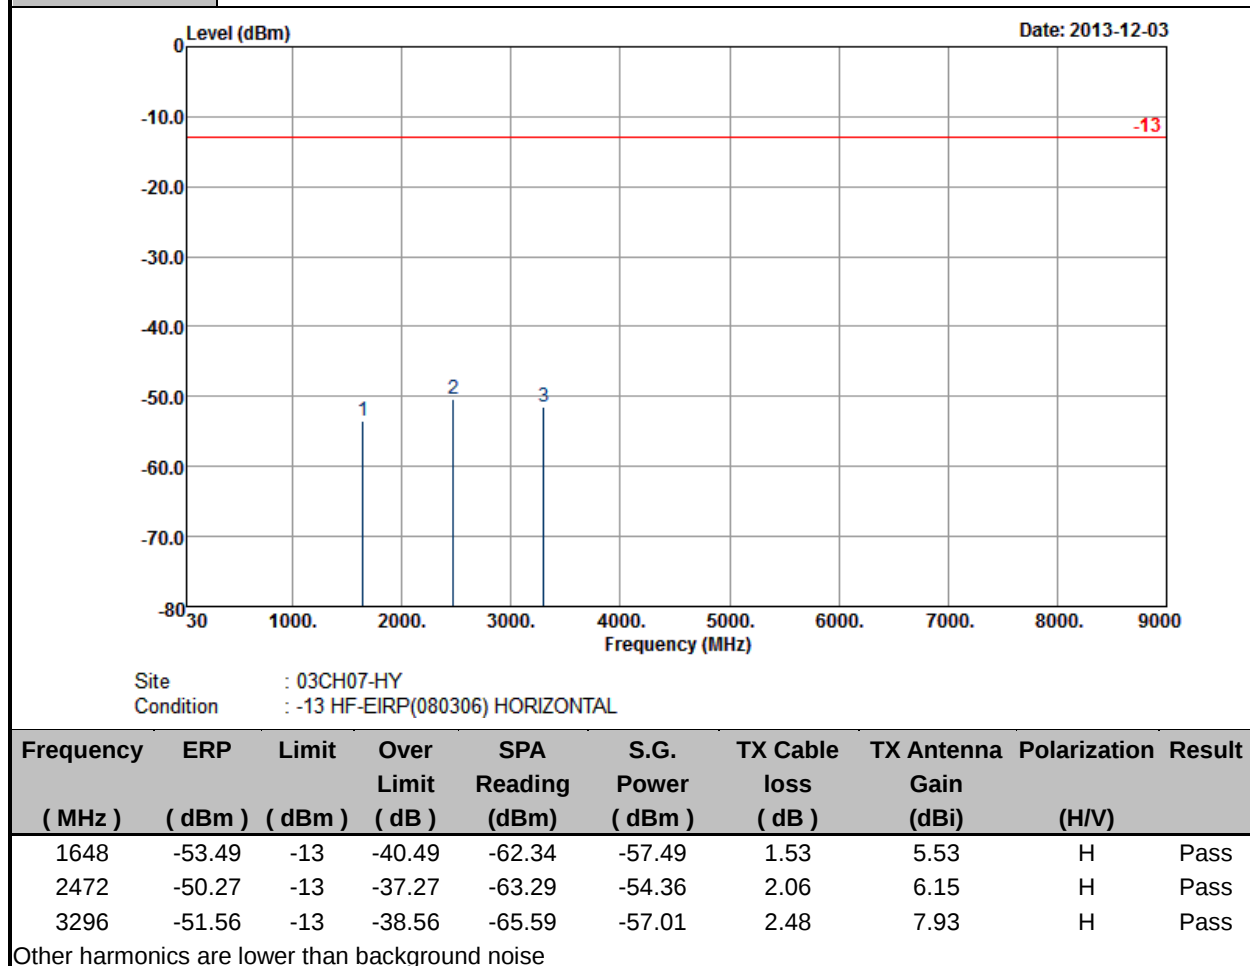

Band :	GSM850	Temperature :	21~23°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	128	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

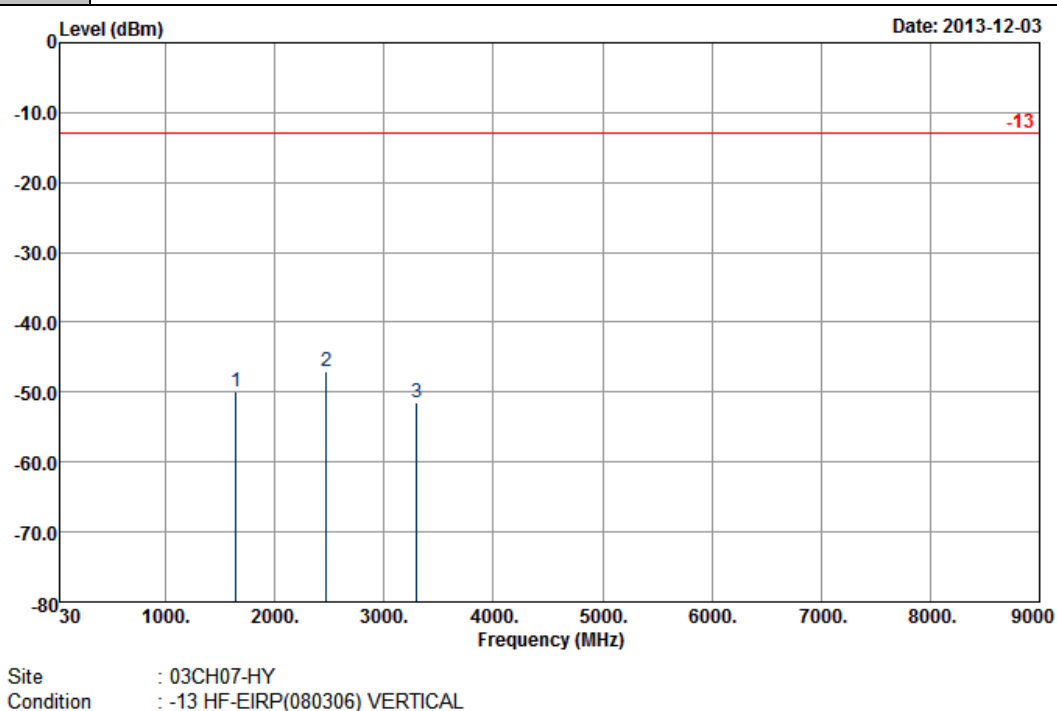


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1648	-50.00	-13	-37.00	-60.89	-54	1.53	5.53	V	Pass
2472	-46.93	-13	-33.93	-60.55	-51.02	2.06	6.15	V	Pass
3296	-51.53	-13	-38.53	-67.08	-56.98	2.48	7.93	V	Pass

Other harmonics are lower than background noise

<Middle Channel>

Band :	GSM850	Temperature :	21~23°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	189	Polarization :	Horizontal
Test Engineer :	Eric Shih		
Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

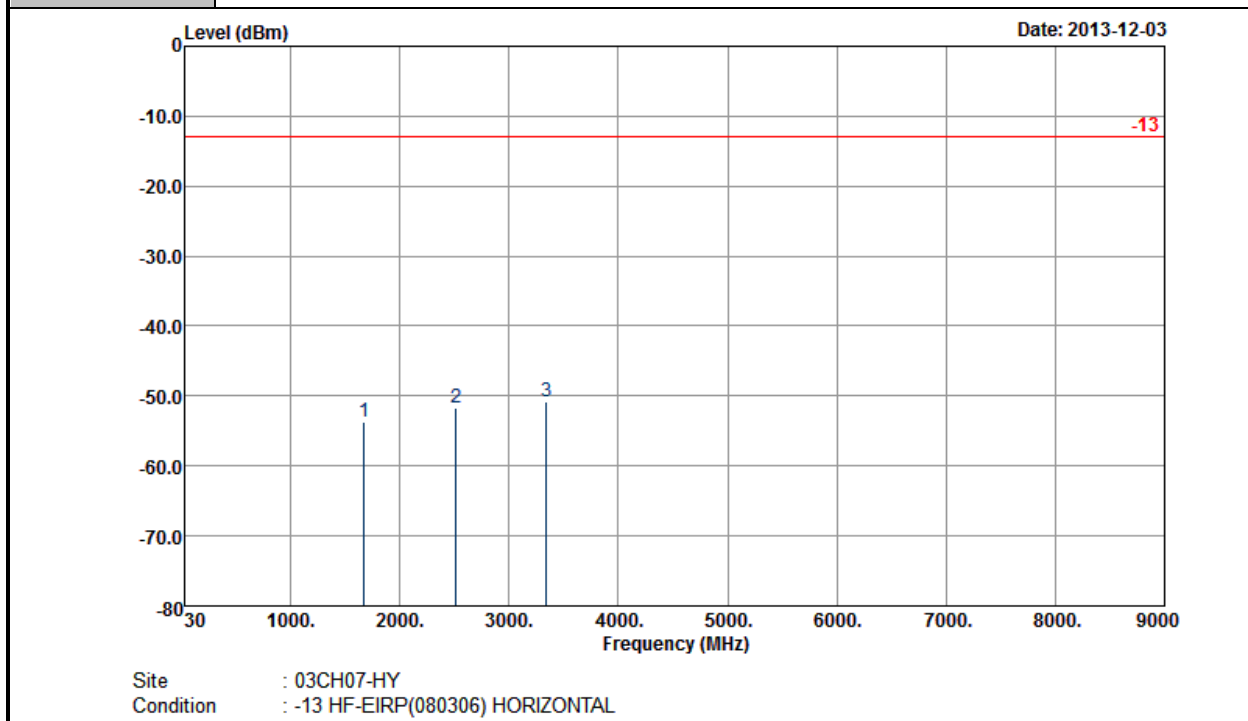


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-53.67	-13	-40.67	-62.56	-57.54	1.62	5.49	H	Pass
2512	-51.74	-13	-38.74	-65.04	-55.86	2.1	6.22	H	Pass
3344	-50.73	-13	-37.73	-64.89	-55.77	3.03	8.07	H	Pass

Other harmonics are lower than background noise

Band :	GSM850	Temperature :	21~23°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	189	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

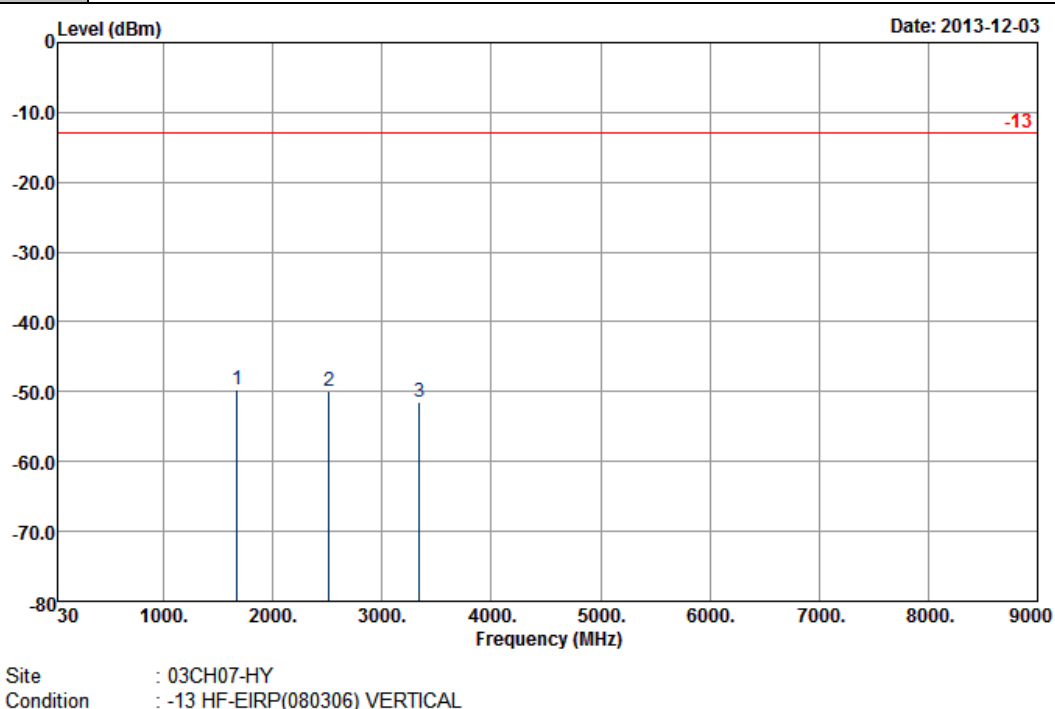


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-49.78	-13	-36.78	-61.13	-53.65	1.62	5.49	V	Pass
2512	-49.84	-13	-36.84	-63.52	-53.96	2.1	6.22	V	Pass
3344	-51.48	-13	-38.48	-67.02	-56.52	3.03	8.07	V	Pass

Other harmonics are lower than background noise

<High Channel>

Band :	GSM850	Temperature :	21~23°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	251	Polarization :	Horizontal
Test Engineer :	Eric Shih		
Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

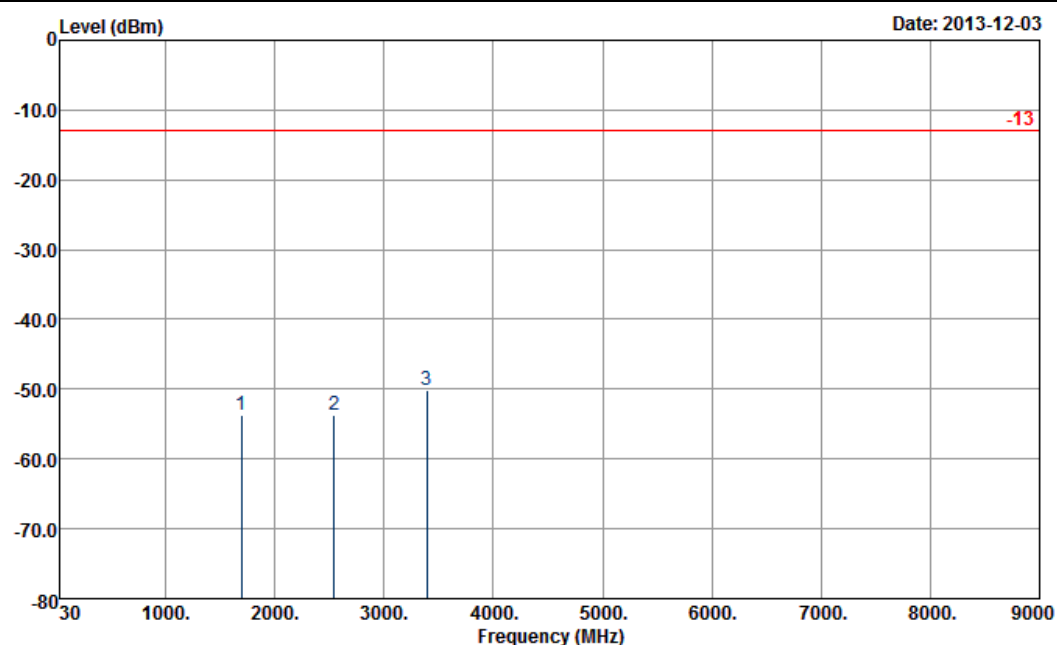


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-53.80	-13	-40.80	-62.86	-57.68	1.57	5.45	H	Pass
2544	-53.74	-13	-40.74	-67.04	-58	2.02	6.28	H	Pass
3392	-50.15	-13	-37.15	-64.34	-56.05	2.3	8.20	H	Pass

Other harmonics are lower than background noise

Band :	GSM850	Temperature :	21~23°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	251	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

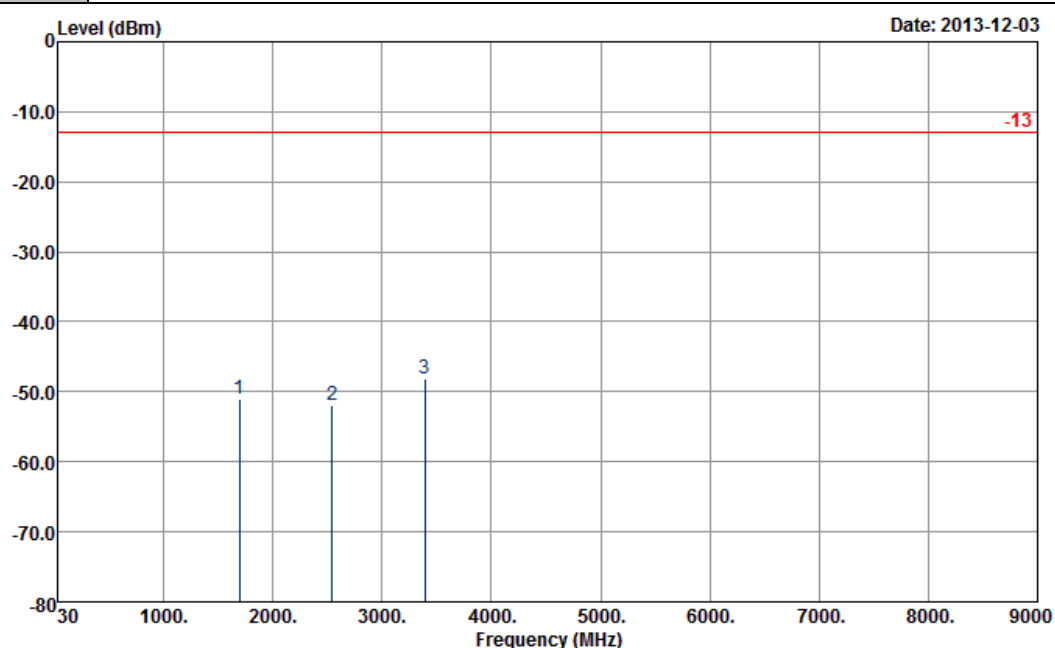


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1696	-51.00	-13	-38.00	-62.21	-54.88	1.57	5.45	V	Pass
2544	-51.95	-13	-38.95	-65.8	-56.21	2.02	6.28	V	Pass
3392	-48.11	-13	-35.11	-63.66	-54.01	2.3	8.20	V	Pass

Other harmonics are lower than background noise

<Low Channel>

Band :	GSM1900	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	512	Polarization :	Horizontal
Test Engineer :	Eric Shih		

Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.
-----------------	---

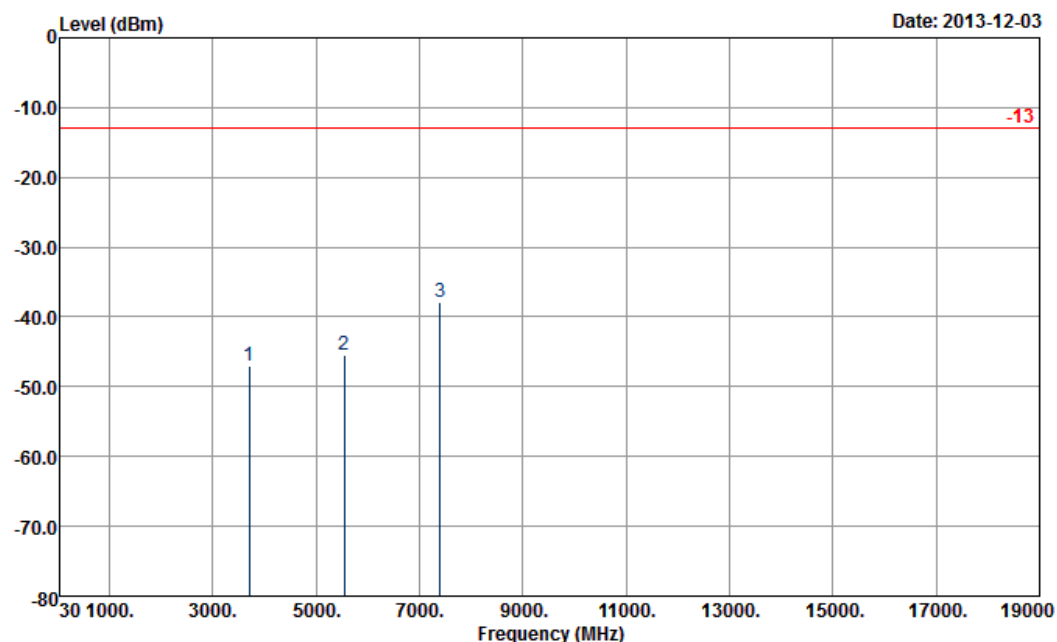


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-47.03	-13	-34.03	-62.18	-53.18	2.59	8.74	H	Pass
5548	-45.56	-13	-32.56	-66.08	-53.22	3.04	10.70	H	Pass
7403	-37.91	-13	-24.91	-65.17	-46.65	3.28	12.02	H	Pass

Other harmonics are lower than background noise

Band :	GSM1900	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	512	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.
-----------------	---

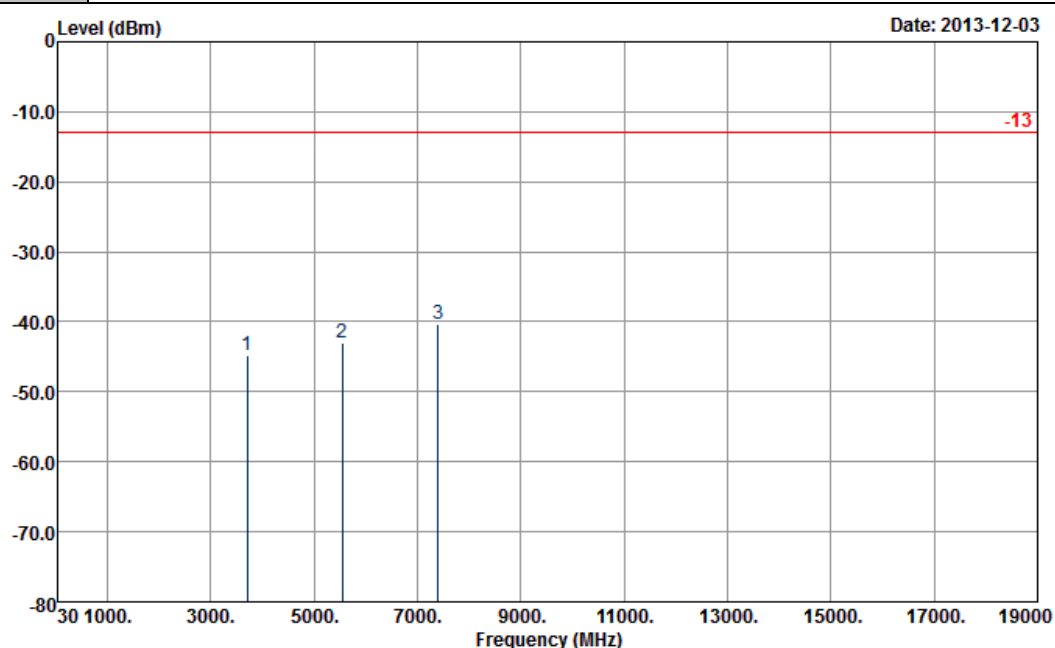

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-44.86	-13	-31.86	-60.91	-51.01	2.59	8.74	V	Pass
5548	-43.10	-13	-30.10	-63.28	-50.76	3.04	10.70	V	Pass
7403	-40.39	-13	-27.39	-67.33	-49.13	3.28	12.02	V	Pass


Other harmonics are lower than background noise

<Middle Channel>

Band :	GSM1900	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	661	Polarization :	Horizontal
Test Engineer :	Eric Shih		

Remark :

- Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

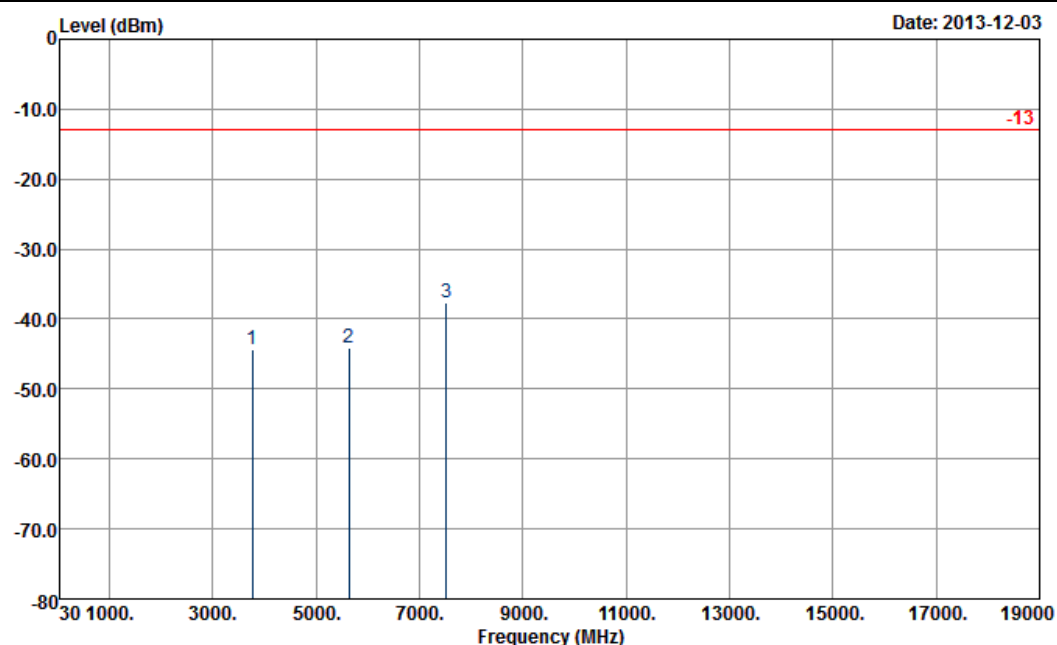


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3756	-44.38	-13	-31.38	-59.9	-50.68	2.51	8.81	H	Pass
5639	-44.07	-13	-31.07	-64.78	-51.78	2.99	10.70	H	Pass
7522	-37.70	-13	-24.70	-64.96	-46.23	3.59	12.12	H	Pass

Other harmonics are lower than background noise

Band :	GSM1900	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	661	Polarization :	Vertical
Test Engineer :	Eric Shih		
Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

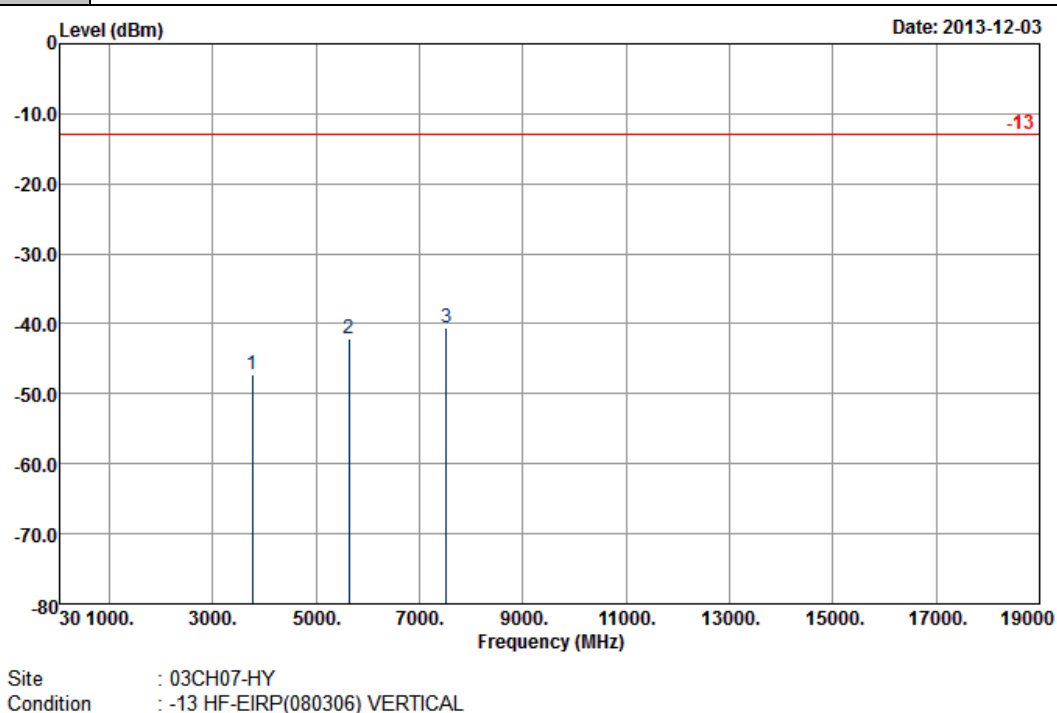


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3756	-47.17	-13	-34.17	-63.5	-53.47	2.51	8.81	V	Pass
5639	-42.15	-13	-29.15	-62.67	-49.86	2.99	10.70	V	Pass
7522	-40.61	-13	-27.61	-67.56	-49.14	3.59	12.12	V	Pass

Other harmonics are lower than background noise

<High Channel>

Band :	GSM1900	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	810	Polarization :	Horizontal
Test Engineer :	Eric Shih		

Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.
-----------------	---

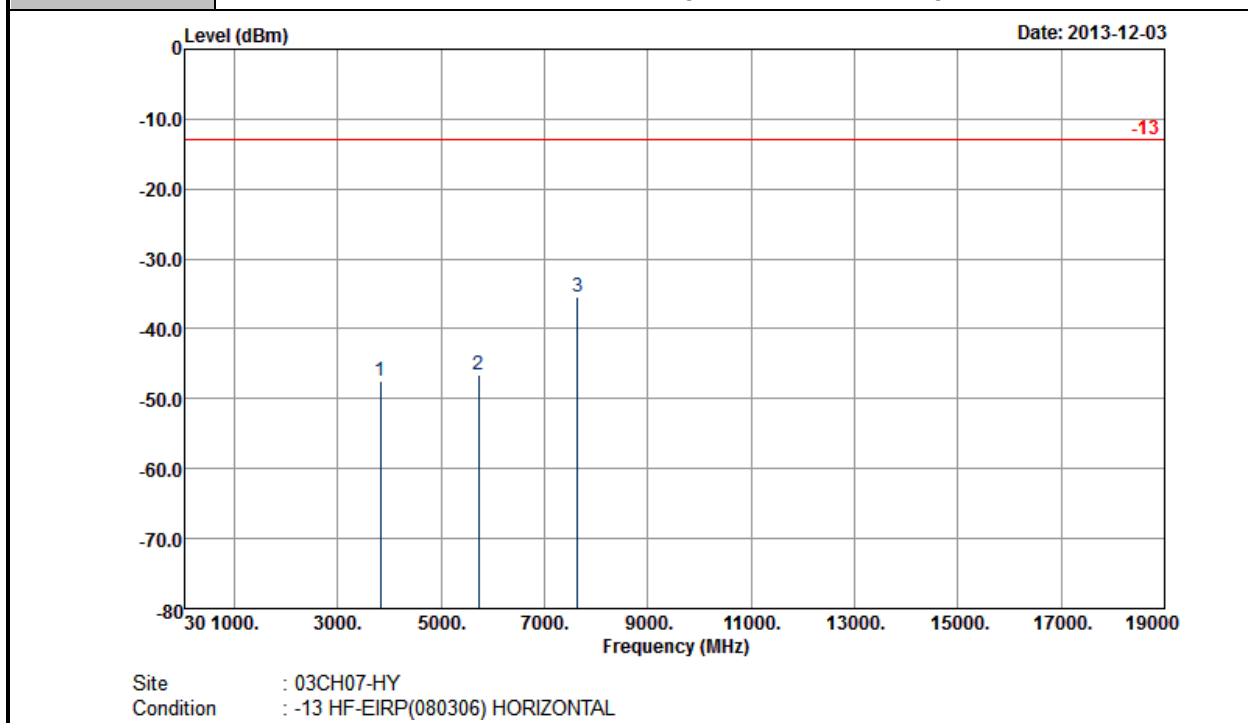


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-47.45	-13	-34.45	-63.01	-53.86	2.47	8.88	H	Pass
5730	-46.62	-13	-33.62	-67.74	-54.32	3	10.70	H	Pass
7641	-35.47	-13	-22.47	-61.84	-44.25	3.43	12.21	H	Pass

Other harmonics are lower than background noise

Band :	GSM1900	Temperature :	21~23°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Channel :	810	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

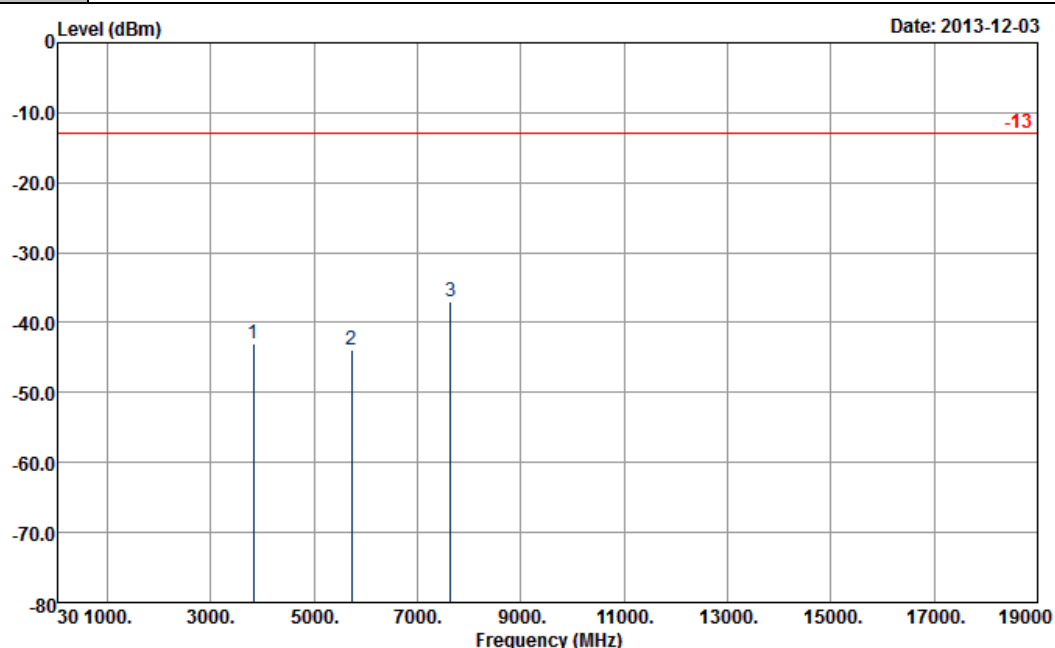

Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) VERTICAL


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-43.05	-13	-30.05	-59.57	-49.46	2.47	8.88	V	Pass
5730	-43.84	-13	-30.84	-64.7	-51.54	3	10.70	V	Pass
7641	-36.99	-13	-23.99	-63.14	-45.77	3.43	12.21	V	Pass

Other harmonics are lower than background noise

<Low Channel>

Band :	GSM1900	Temperature :	21~23°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	512	Polarization :	Horizontal
Test Engineer :	Eric Shih		

Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.
-----------------	---

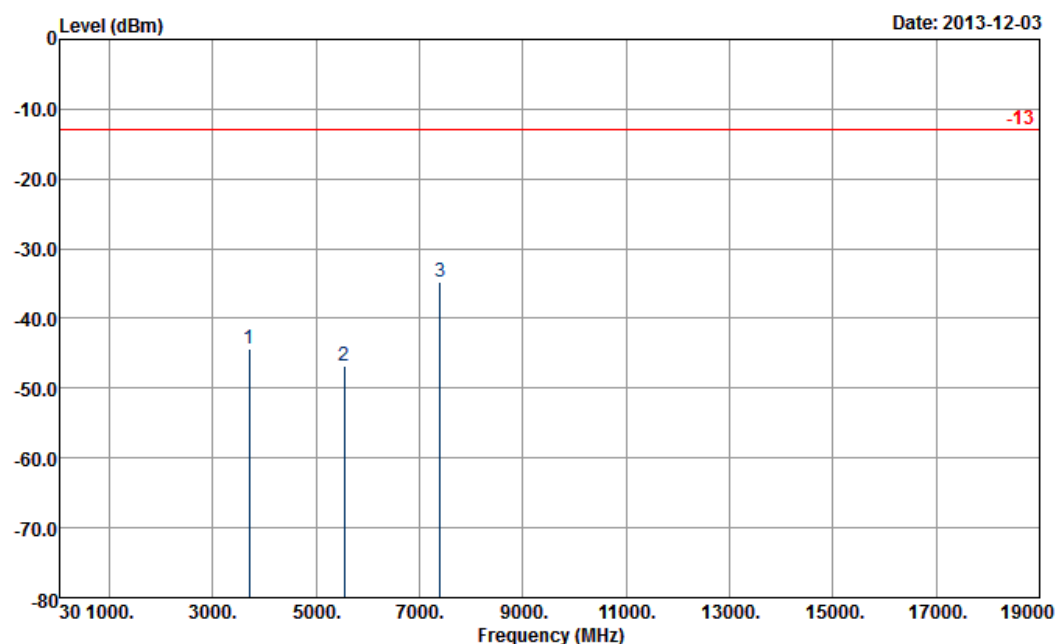

Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-44.30	-13	-31.30	-59.46	-50.45	2.59	8.74	H	Pass
5548	-46.73	-13	-33.73	-67.33	-54.39	3.04	10.70	H	Pass
7403	-34.77	-13	-21.77	-62.14	-43.51	3.28	12.02	H	Pass

Other harmonics are lower than background noise

Band :	GSM1900	Temperature :	21~23°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	512	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

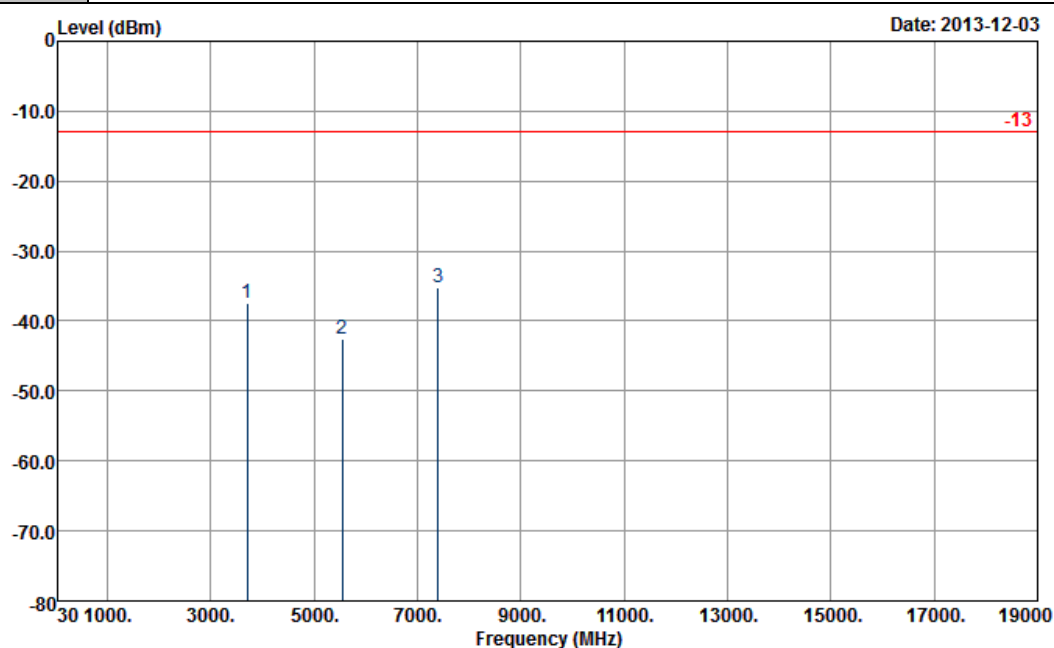


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3700	-37.34	-13	-24.34	-53.46	-43.49	2.59	8.74	V	Pass
5548	-42.56	-13	-29.56	-62.81	-50.22	3.04	10.70	V	Pass
7403	-35.15	-13	-22.15	-62.18	-43.89	3.28	12.02	V	Pass

Other harmonics are lower than background noise

<Middle Channel>

Band :	GSM1900	Temperature :	21~23°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	661	Polarization :	Horizontal
Test Engineer :	Eric Shih		
Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

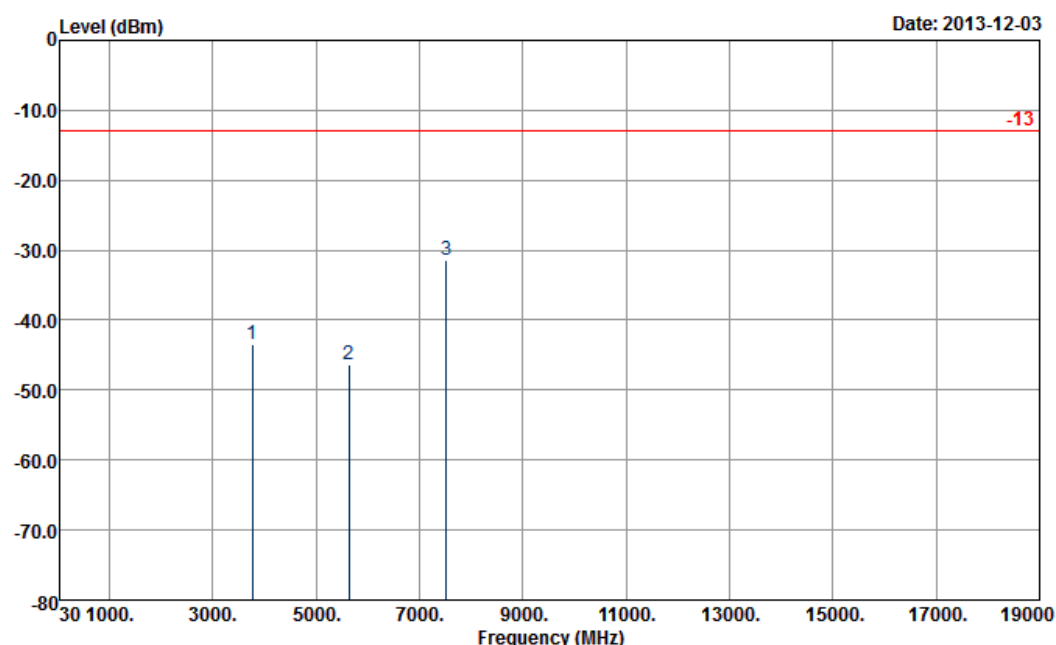

Site : 03CH07-HY
 Condition : -13 HF-EIRP(080306) HORIZONTAL


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3756	-43.56	-13	-30.56	-58.79	-49.86	2.51	8.81	H	Pass
5639	-46.29	-13	-33.29	-66.97	-54	2.99	10.70	H	Pass
7522	-31.34	-13	-18.34	-58.66	-39.87	3.59	12.12	H	Pass

Other harmonics are lower than background noise

Band :	GSM1900	Temperature :	21~23°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	661	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

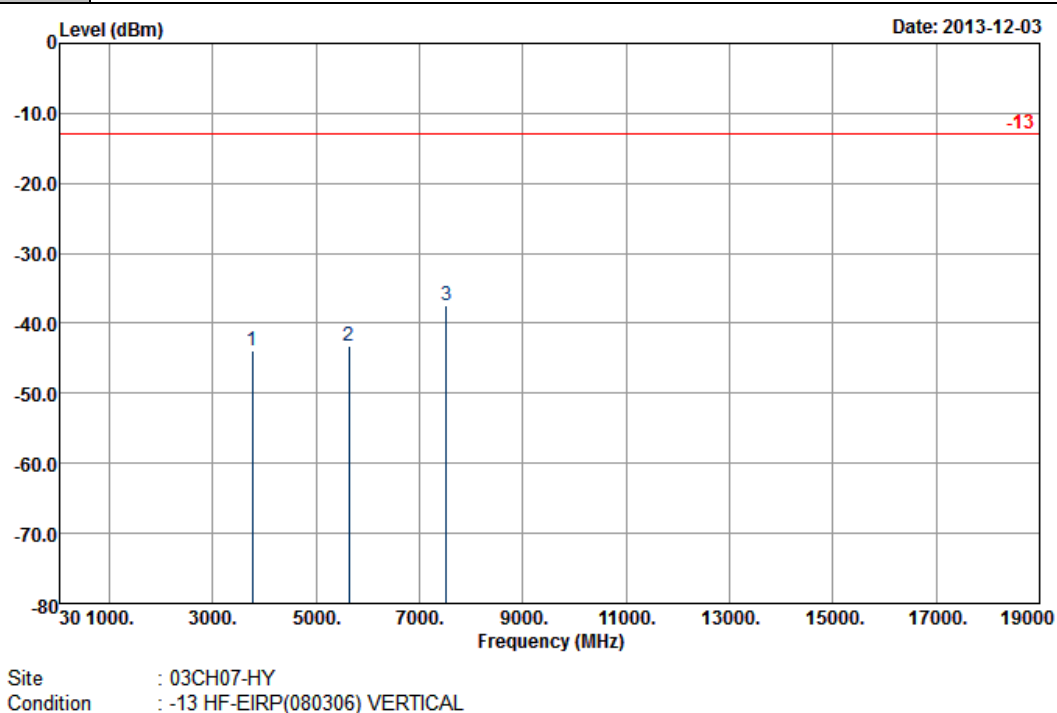


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3756	-43.85	-13	-30.85	-60.12	-50.15	2.51	8.81	V	Pass
5639	-43.27	-13	-30.27	-63.69	-50.98	2.99	10.70	V	Pass
7522	-37.48	-13	-24.48	-64.53	-46.01	3.59	12.12	V	Pass

Other harmonics are lower than background noise

<High Channel>

Band :	GSM1900	Temperature :	21~23°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	810	Polarization :	Horizontal
Test Engineer :	Eric Shih		
Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

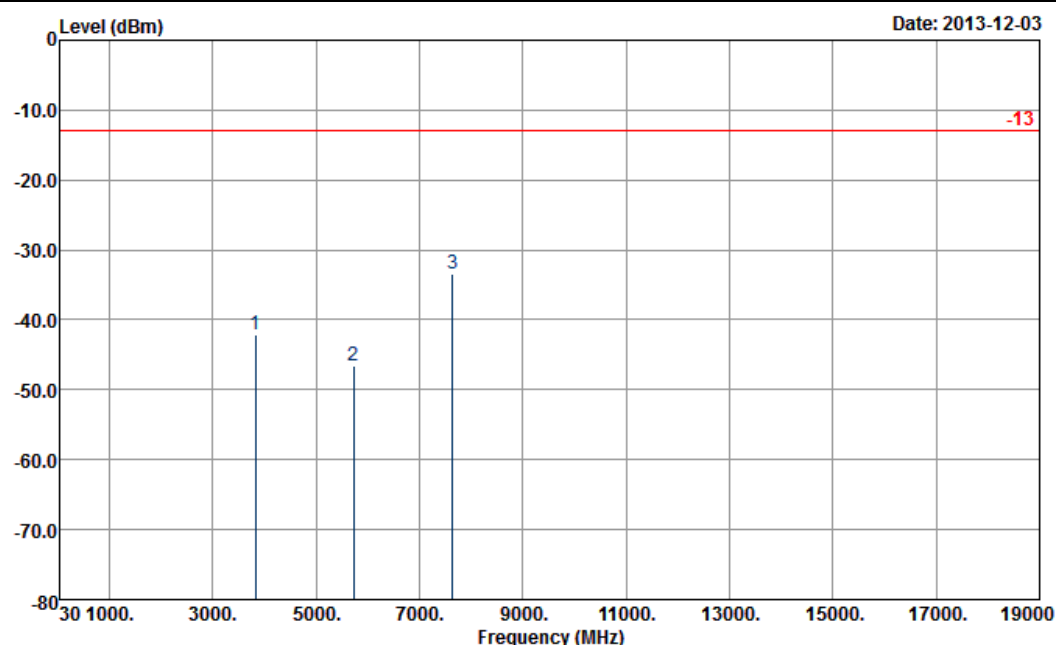


Site : 03CH07-HY
 Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-42.01	-13	-29.01	-57.6	-48.42	2.47	8.88	H	Pass
5730	-46.53	-13	-33.53	-67.67	-54.23	3	10.70	H	Pass
7641	-33.33	-13	-20.33	-59.7	-42.11	3.43	12.21	H	Pass

Other harmonics are lower than background noise

Band :	GSM1900	Temperature :	21~23°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Channel :	810	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.
-----------------	---

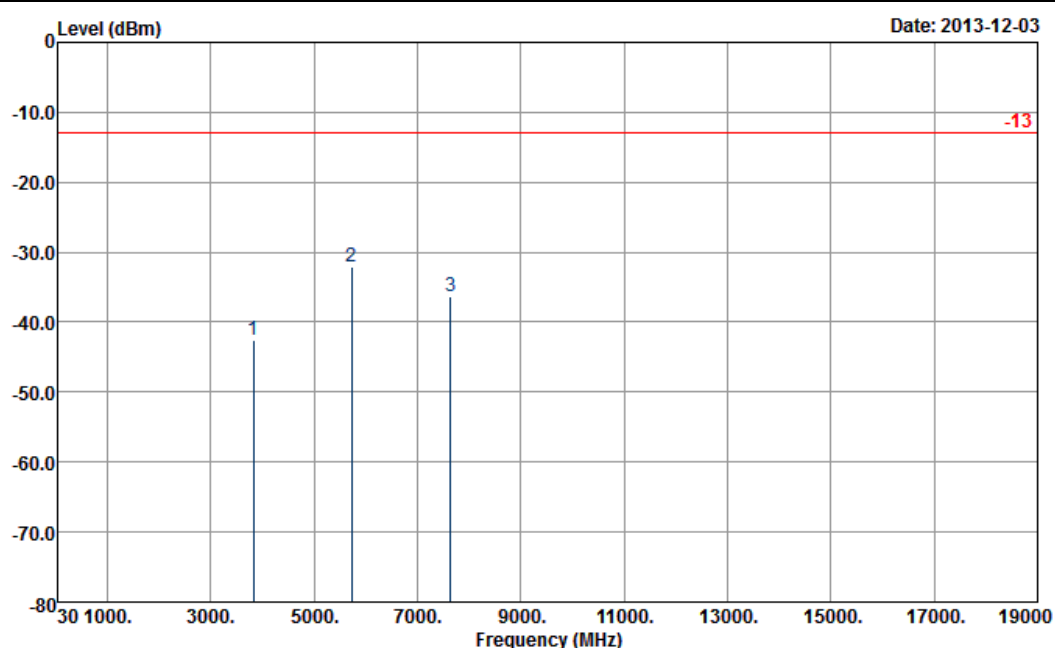


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) VERTICAL

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-42.55	-13	-29.55	-58.96	-48.96	2.47	8.88	V	Pass
5730	-32.17	-13	-19.17	-52.89	-39.87	3	10.70	V	Pass
7641	-36.23	-13	-23.23	-62.41	-45.01	3.43	12.21	V	Pass

Other harmonics are lower than background noise

<Low Channel>

Band :	WCDMA Band V	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	4132	Polarization :	Horizontal
Test Engineer :	Eric Shih		
Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

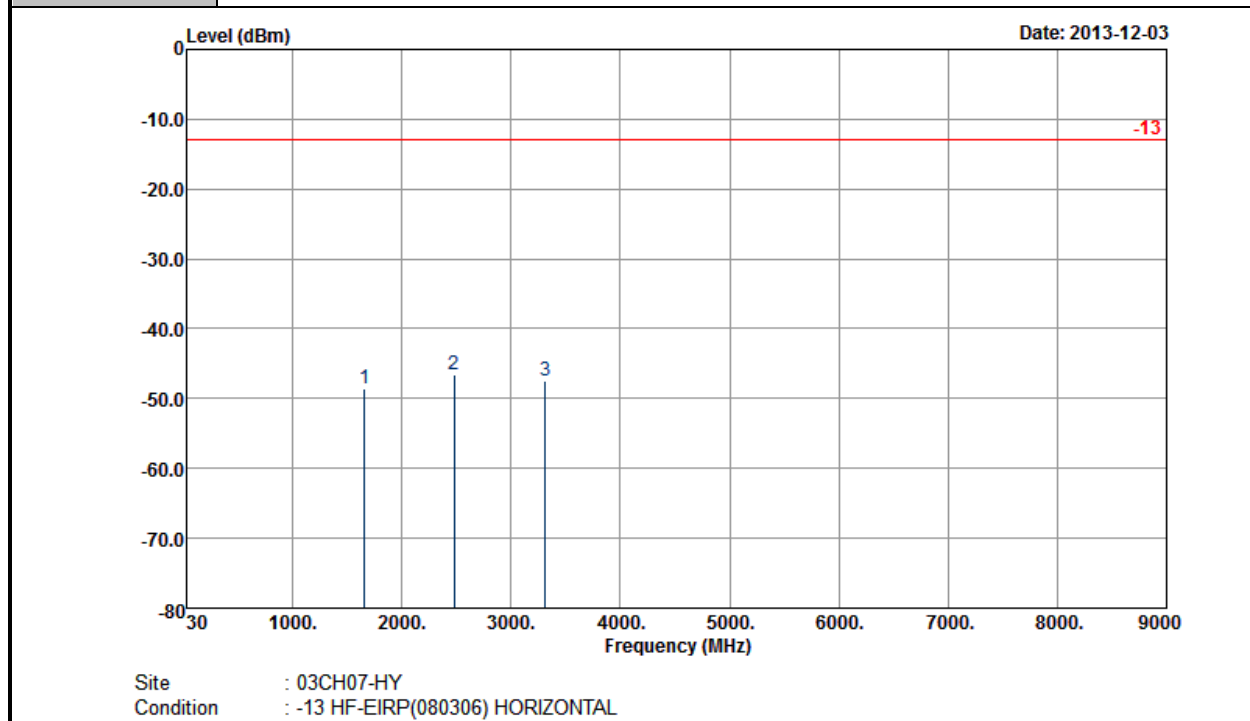


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1656	-48.49	-13	-35.49	-57.35	-52.49	1.53	5.53	H	Pass
2480	-46.67	-13	-33.67	-59.92	-50.76	2.06	6.15	H	Pass
3312	-47.56	-13	-34.56	-61.59	-53.01	2.48	7.93	H	Pass

Other harmonics are lower than background noise

Band :	WCDMA Band V	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	4132	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :	- Spurious emissions within 30-1000MHz were found more than 20dB below limit line. - The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.
-----------------	---

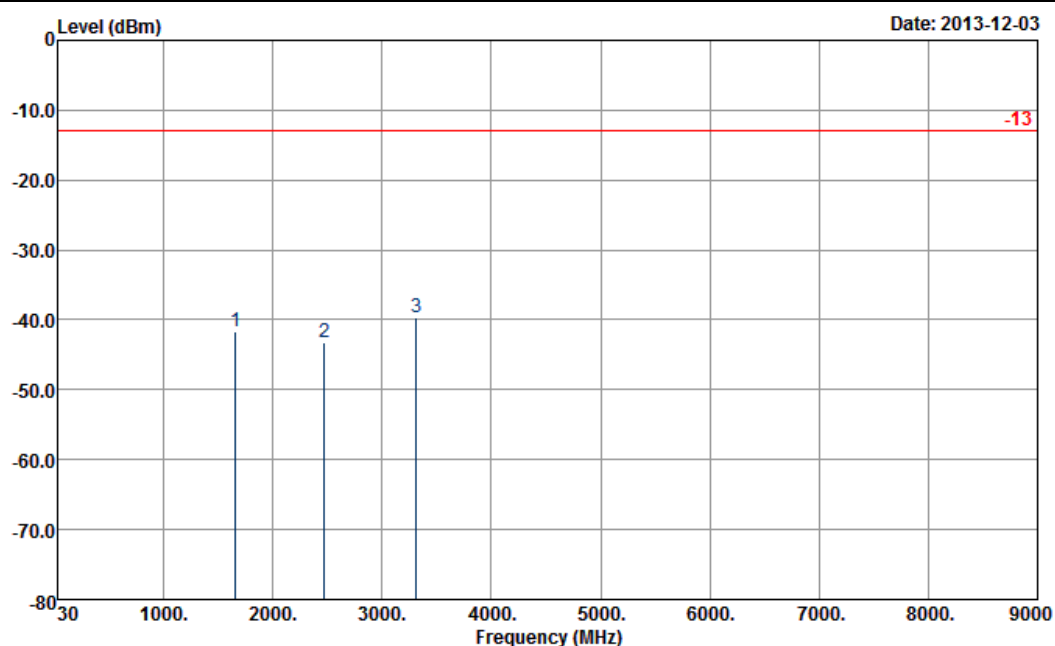


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1656	-41.75	-13	-28.75	-52.93	-45.75	1.53	5.53	V	Pass
2472	-43.33	-13	-30.33	-56.95	-47.42	2.06	6.15	V	Pass
3312	-39.67	-13	-26.67	-55.28	-45.12	2.48	7.93	V	Pass

Other harmonics are lower than background noise

<Middle Channel>

Band :	WCDMA Band V	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	4182	Polarization :	Horizontal
Test Engineer :	Eric Shih		

Remark :	- Spurious emissions within 30-1000MHz were found more than 20dB below limit line. - The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.
-----------------	---

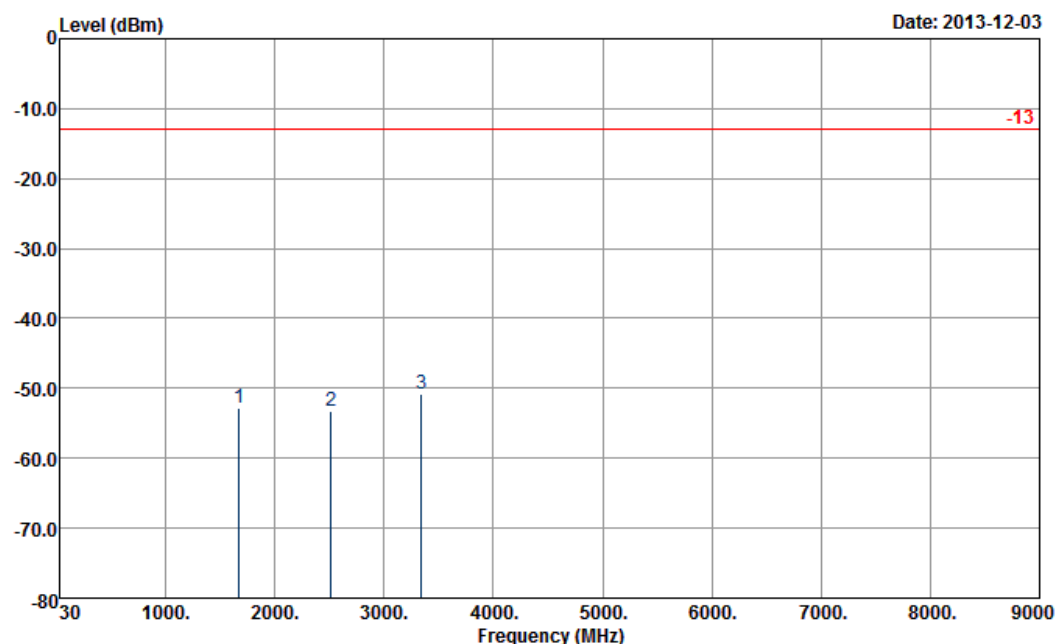


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-52.81	-13	-39.81	-61.73	-56.68	1.62	5.49	H	Pass
2512	-53.34	-13	-40.34	-66.52	-57.46	2.1	6.22	H	Pass
3344	-50.75	-13	-37.75	-64.75	-55.79	3.03	8.07	H	Pass

Other harmonics are lower than background noise

Band :	WCDMA Band V	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	4182	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.
-----------------	---

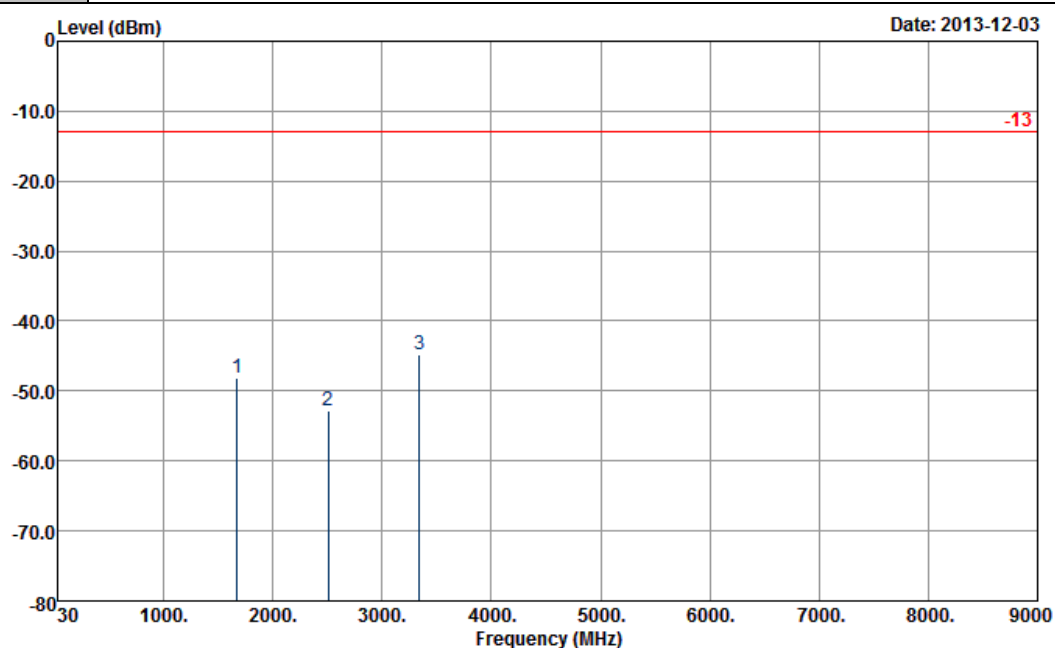


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-48.14	-13	-35.14	-59.33	-52.01	1.62	5.49	V	Pass
2509	-52.88	-13	-39.88	-66.6	-57	2.1	6.22	V	Pass
3344	-44.82	-13	-31.82	-60.41	-49.86	3.03	8.07	V	Pass

Other harmonics are lower than background noise

<High Channel>

Band :	WCDMA Band V	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	4233	Polarization :	Horizontal
Test Engineer :	Eric Shih		
Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

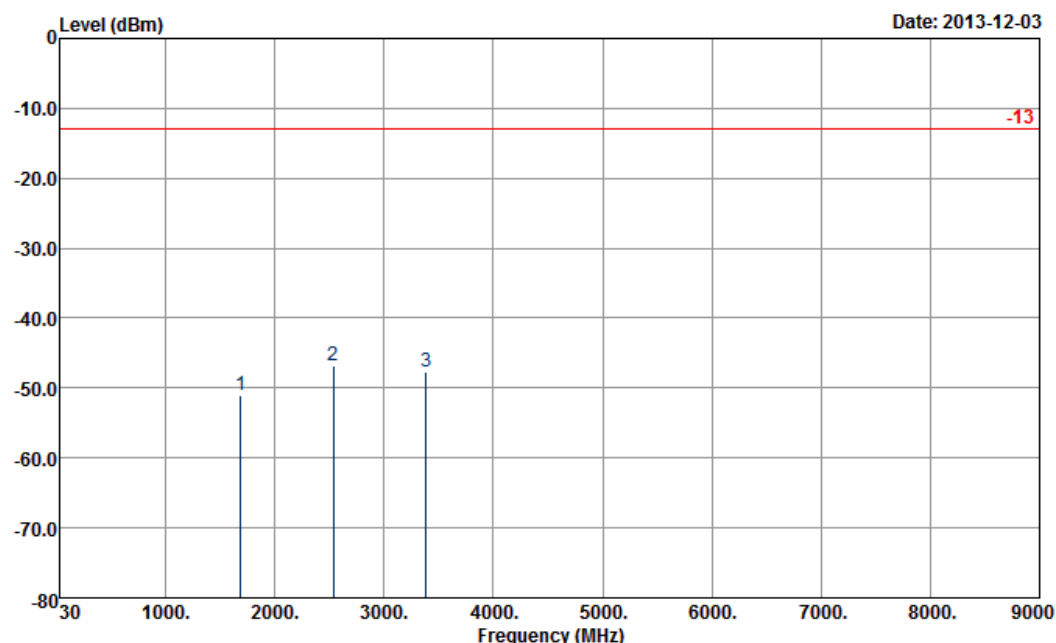

Site : 03CH07-HY
 Condition : -13 HF-EIRP(080306) HORIZONTAL


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1688	-51.10	-13	-38.10	-59.99	-54.98	1.57	5.45	H	Pass
2536	-46.74	-13	-33.74	-59.91	-51	2.02	6.28	H	Pass
3384	-47.64	-13	-34.64	-61.83	-53.54	2.3	8.20	H	Pass

Other harmonics are lower than background noise

Band :	WCDMA Band V	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	4233	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

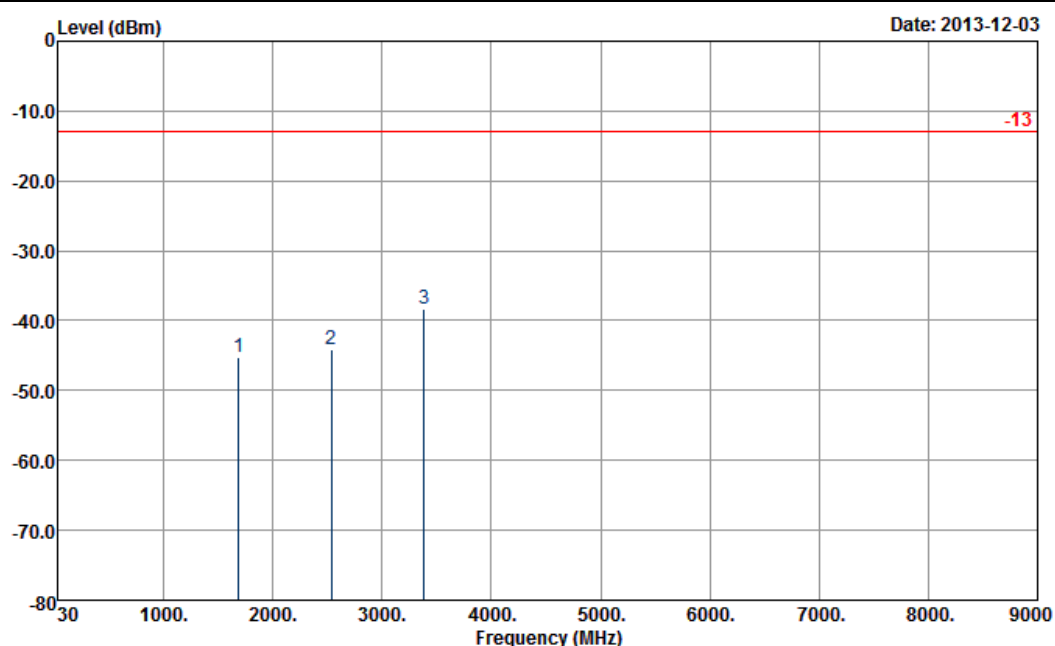

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1688	-45.13	-13	-32.13	-56.32	-49.01	1.57	5.45	V	Pass
2536	-44.16	-13	-31.16	-57.87	-48.42	2.02	6.28	V	Pass
3384	-38.41	-13	-25.41	-54.04	-44.31	2.3	8.20	V	Pass


Other harmonics are lower than background noise

<Low Channel>

Band :	WCDMA Band IV	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	1312	Polarization :	Horizontal
Test Engineer :	Eric Shih		

Remark :

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

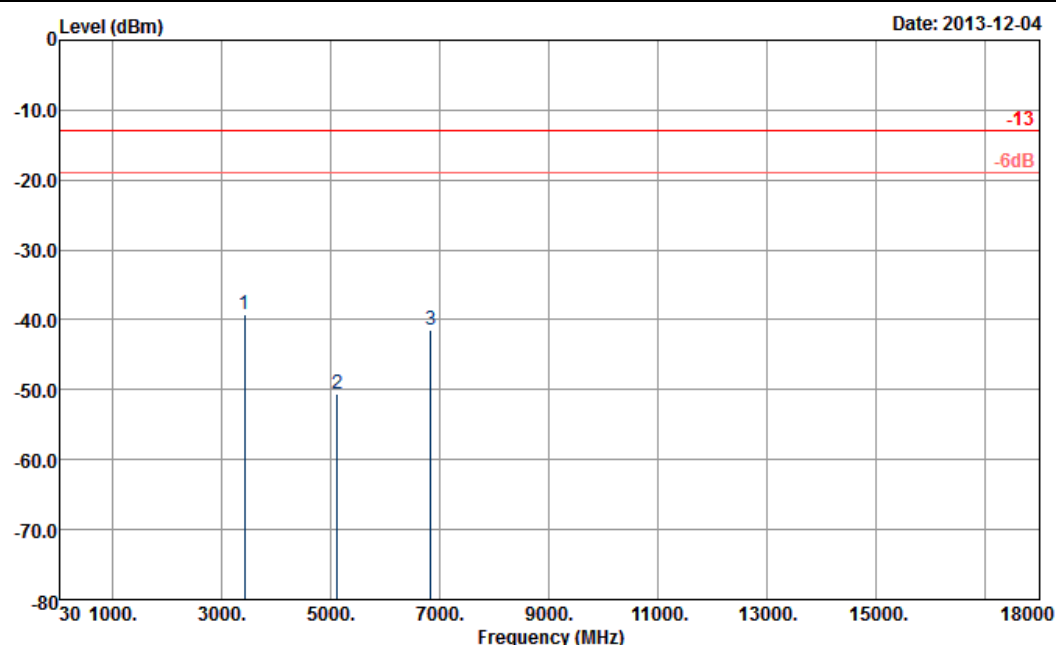

Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3420	-39.17	-13	-26.17	-53.33	-43	4.48	8.31	H	Pass
5128	-50.48	-13	-37.48	-68.92	-55.12	5.332	9.98	H	Pass
6843	-41.51	-13	-28.51	-67.27	-46.75	6.1	11.34	H	Pass

Other harmonics are lower than background noise

Band :	WCDMA Band IV	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	1312	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

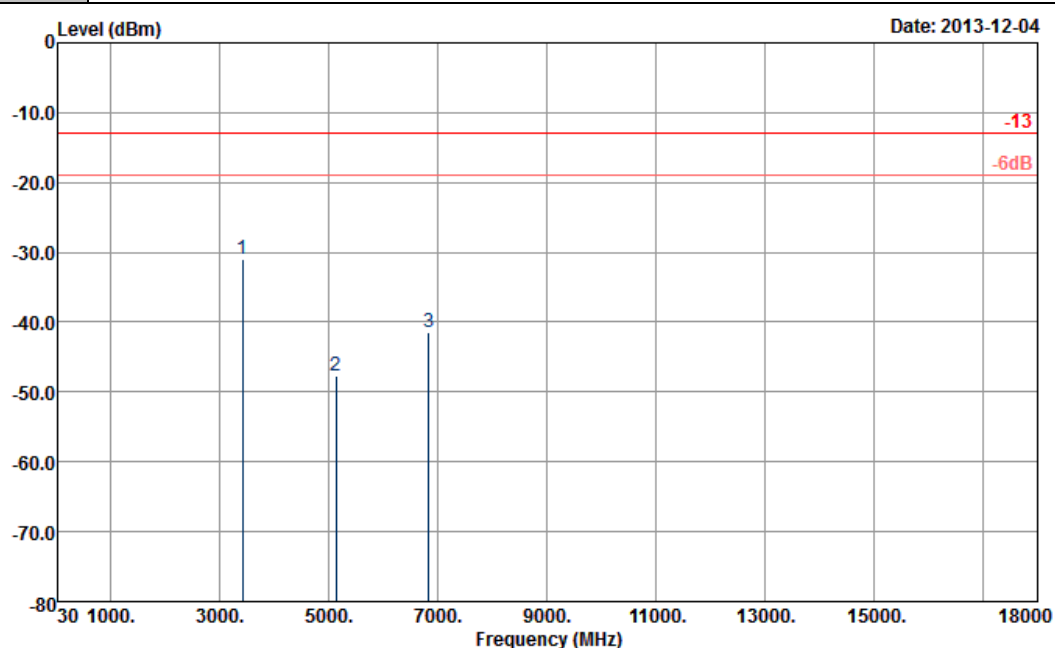

Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) VERTICAL

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3420	-30.91	-13	-17.91	-46.51	-34.74	4.48	8.31	V	Pass
5142	-47.63	-13	-34.63	-66.33	-52.27	5.332	9.98	V	Pass
6843	-41.38	-13	-28.38	-66.33	-46.62	6.1	11.34	V	Pass


Other harmonics are lower than background noise

<Middle Channel>

Band :	WCDMA Band IV	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	1413	Polarization :	Horizontal
Test Engineer :	Eric Shih		

Remark :

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

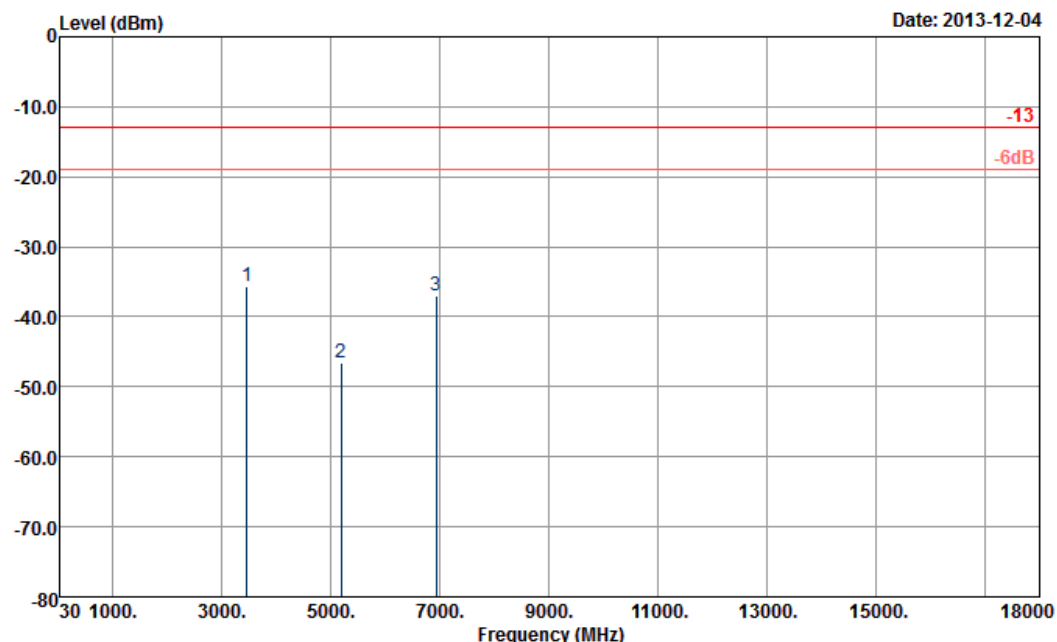

Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3462	-35.59	-13	-22.59	-49.83	-39.42	4.48	8.31	H	Pass
5191	-46.62	-13	-33.62	-65.49	-51.26	5.332	9.98	H	Pass
6934	-36.91	-13	-23.91	-63.07	-42.15	6.1	11.34	H	Pass

Other harmonics are lower than background noise

Band :	WCDMA Band IV	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	1413	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.

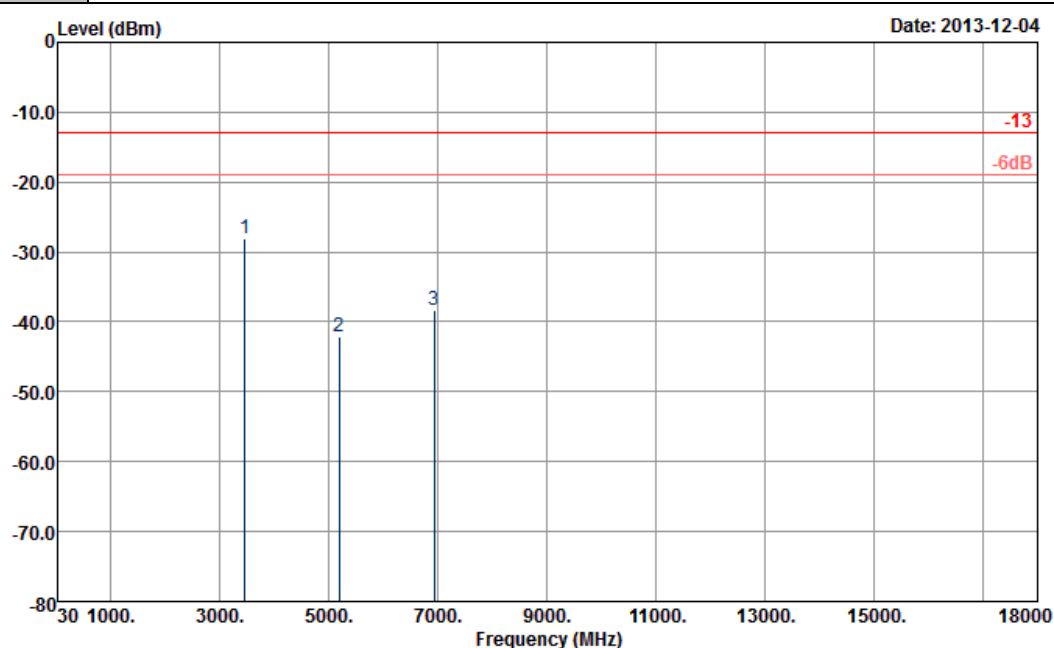


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) VERTICAL

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3469	-28.18	-13	-15.18	-43.75	-32.01	4.48	8.31	V	Pass
5198	-42.21	-13	-29.21	-61	-46.85	5.332	9.98	V	Pass
6934	-38.28	-13	-25.28	-63.79	-43.52	6.1	11.34	V	Pass

Other harmonics are lower than background noise


<High Channel>

Band :	WCDMA Band IV	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	1513	Polarization :	Horizontal
Test Engineer :	Eric Shih		
Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

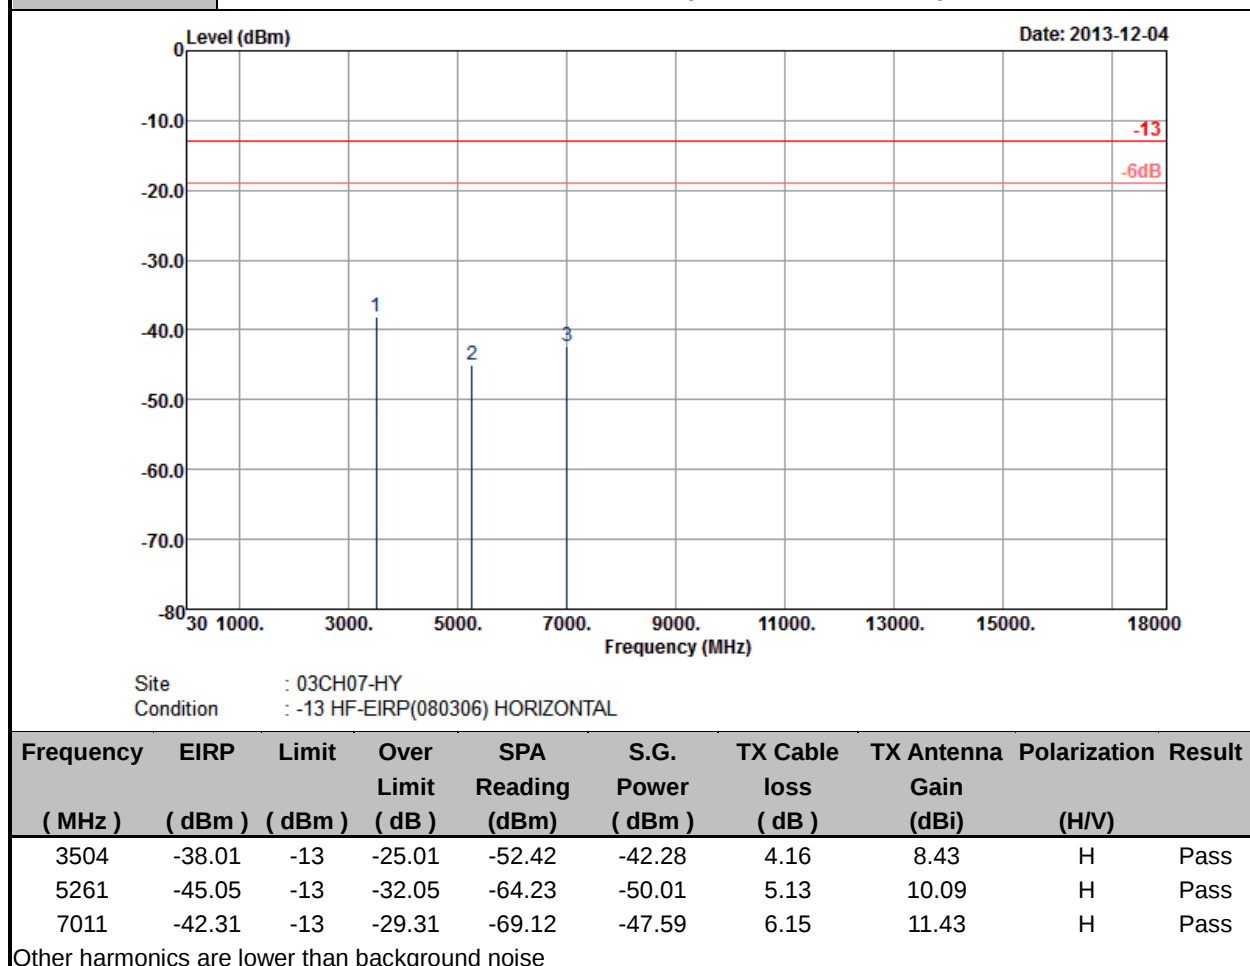

Band :	WCDMA Band IV	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	1513	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :	- Spurious emissions within 30-1000MHz were found more than 20dB below limit line. - The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.
-----------------	---

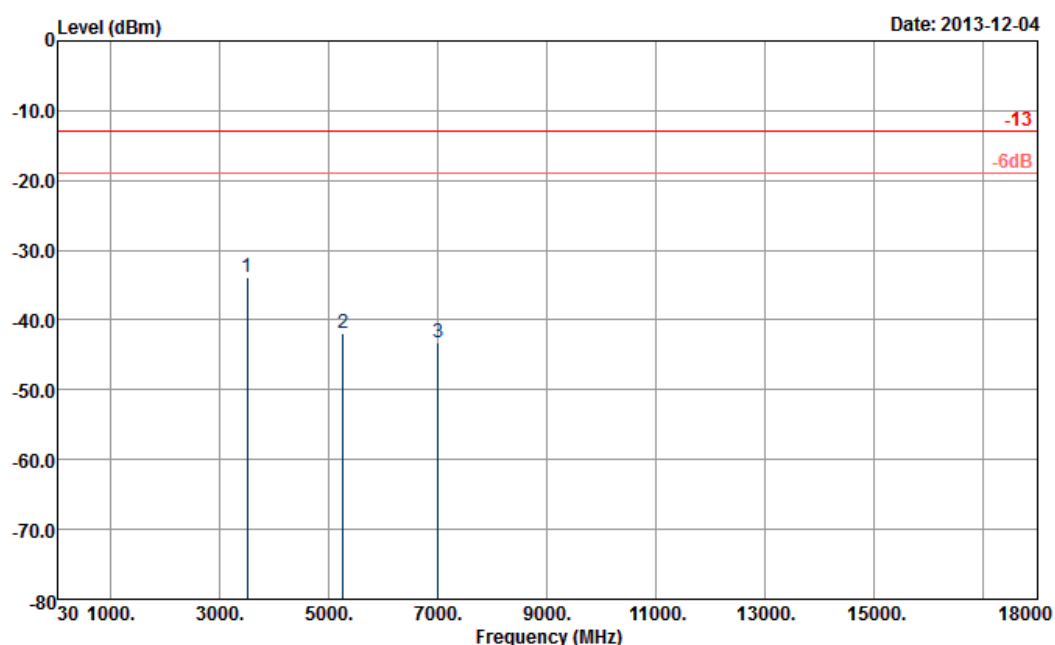

Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) VERTICAL


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3504	-33.89	-13	-20.89	-49.47	-38.16	4.16	8.43	V	Pass
5261	-41.80	-13	-28.80	-60.97	-46.76	5.13	10.09	V	Pass
7008	-43.20	-13	-30.20	-68.87	-48.48	6.15	11.43	V	Pass

Other harmonics are lower than background noise

<Low Channel>

Band :	WCDMA Band II	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	9262	Polarization :	Horizontal
Test Engineer :	Eric Shih		

Remark :	- Spurious emissions within 30-1000MHz were found more than 20dB below limit line. - The harmonic (5th, 6th, 7th,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.
-----------------	---

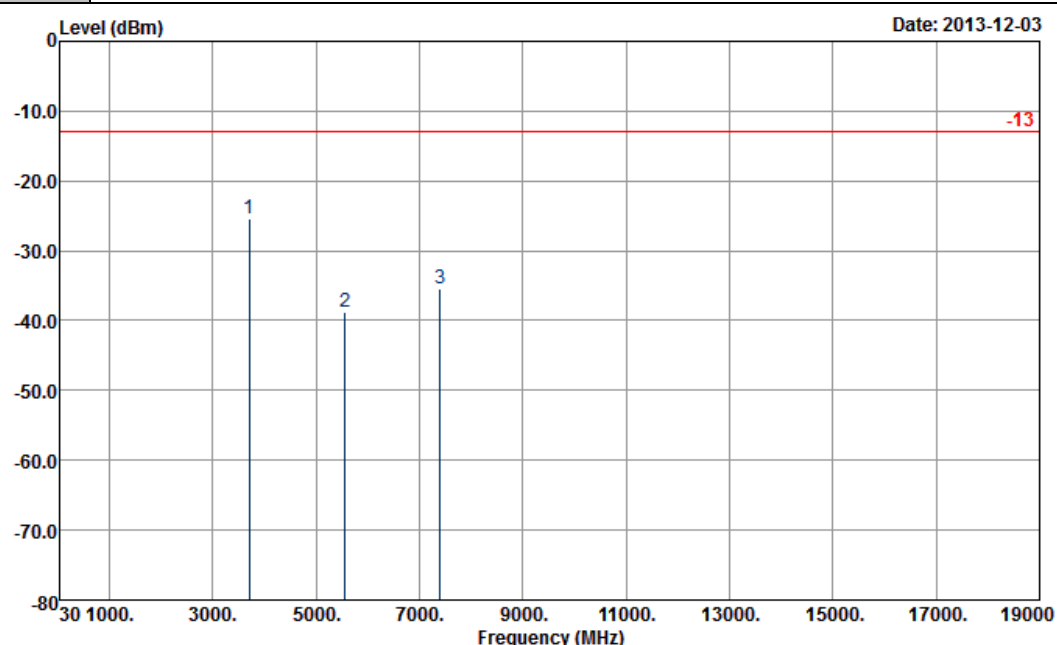


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3707	-25.50	-13	-12.50	-40.72	-31.65	2.59	8.74	H	Pass
5562	-38.70	-13	-25.70	-59.2	-46.36	3.04	10.70	H	Pass
7403	-35.44	-13	-22.44	-62.77	-44.18	3.28	12.02	H	Pass

Other harmonics are lower than background noise

Band :	WCDMA Band II	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	9262	Polarization :	Vertical
Test Engineer :	Eric Shih		
Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

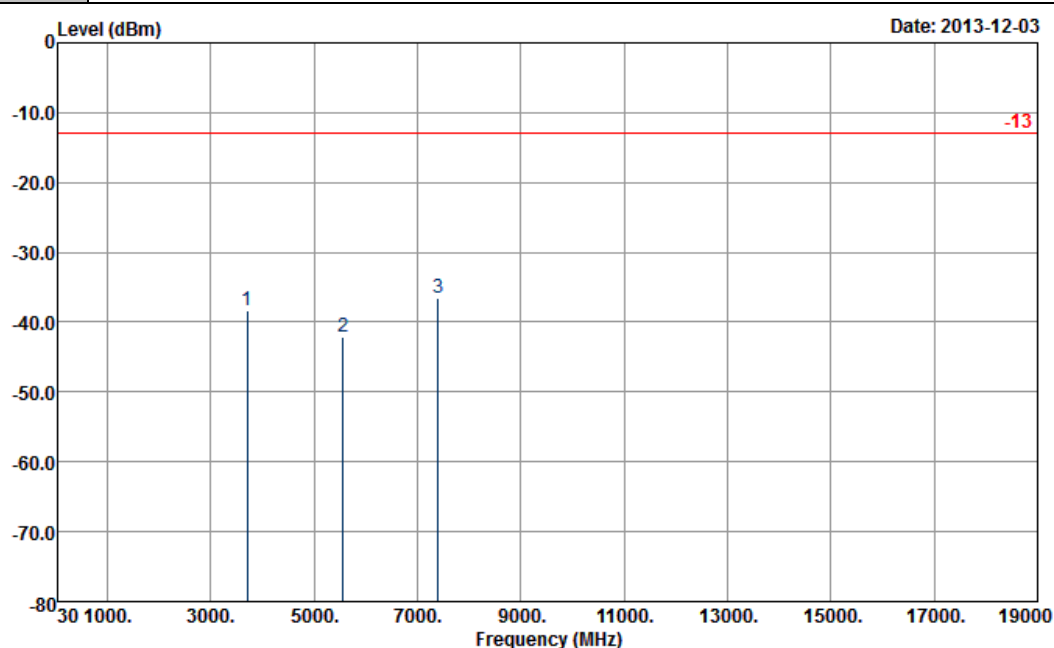

Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) VERTICAL


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3707	-38.43	-13	-25.43	-54.57	-44.58	2.59	8.74	V	Pass
5562	-42.21	-13	-29.21	-62.46	-49.87	3.04	10.70	V	Pass
7403	-36.63	-13	-23.63	-63.67	-45.37	3.28	12.02	V	Pass

Other harmonics are lower than background noise

<Middle Channel>

Band :	WCDMA Band II	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	9400	Polarization :	Horizontal
Test Engineer :	Eric Shih		

Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.
-----------------	---

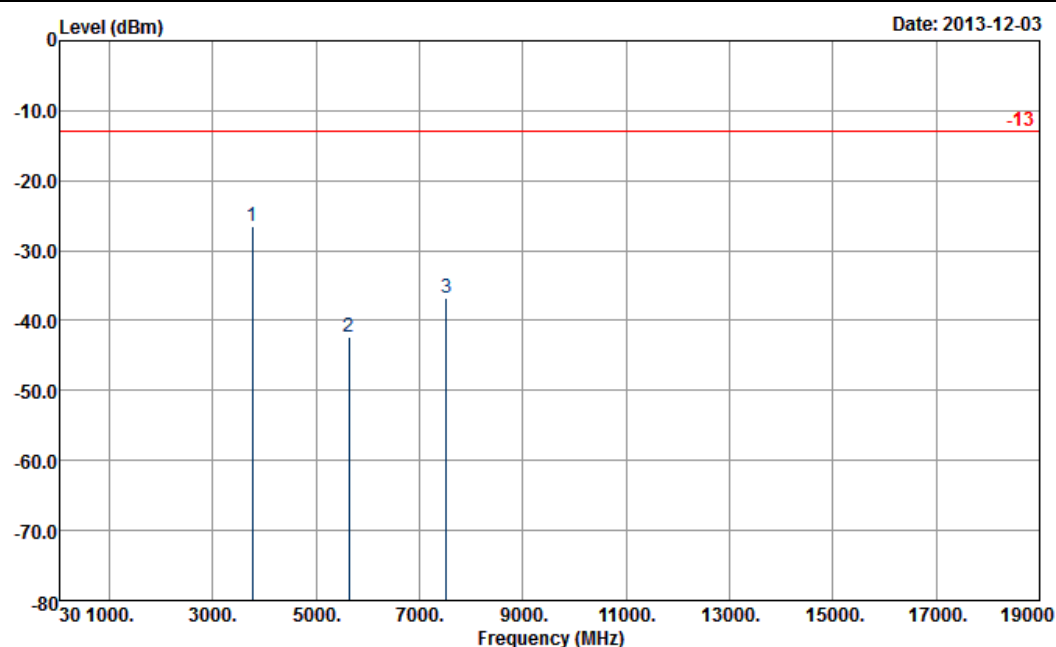


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3763	-26.45	-13	-13.45	-41.97	-32.75	2.51	8.81	H	Pass
5639	-42.29	-13	-29.29	-63.02	-50	2.99	10.70	H	Pass
7522	-36.72	-13	-23.72	-63.91	-45.25	3.59	12.12	H	Pass

Other harmonics are lower than background noise

Band :	WCDMA Band II	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	9400	Polarization :	Vertical
Test Engineer :	Eric Shih		
Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

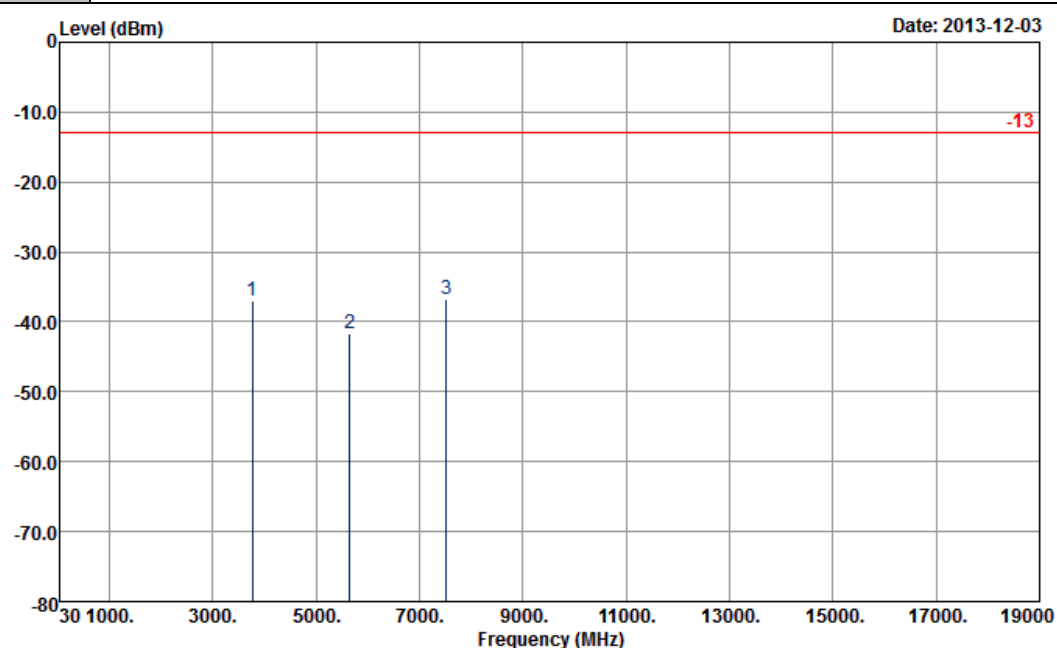


Site : 03CH07-HY
Condition : -13 HF-EIRP(080306) VERTICAL

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3756	-36.91	-13	-23.91	-53.29	-43.21	2.51	8.81	V	Pass
5646	-41.68	-13	-28.68	-62.25	-49.39	2.99	10.70	V	Pass
7515	-36.80	-13	-23.80	-63.9	-45.33	3.59	12.12	V	Pass

Other harmonics are lower than background noise

<High Channel>

Band :	WCDMA Band II	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	9538	Polarization :	Horizontal
Test Engineer :	Eric Shih		
Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.		

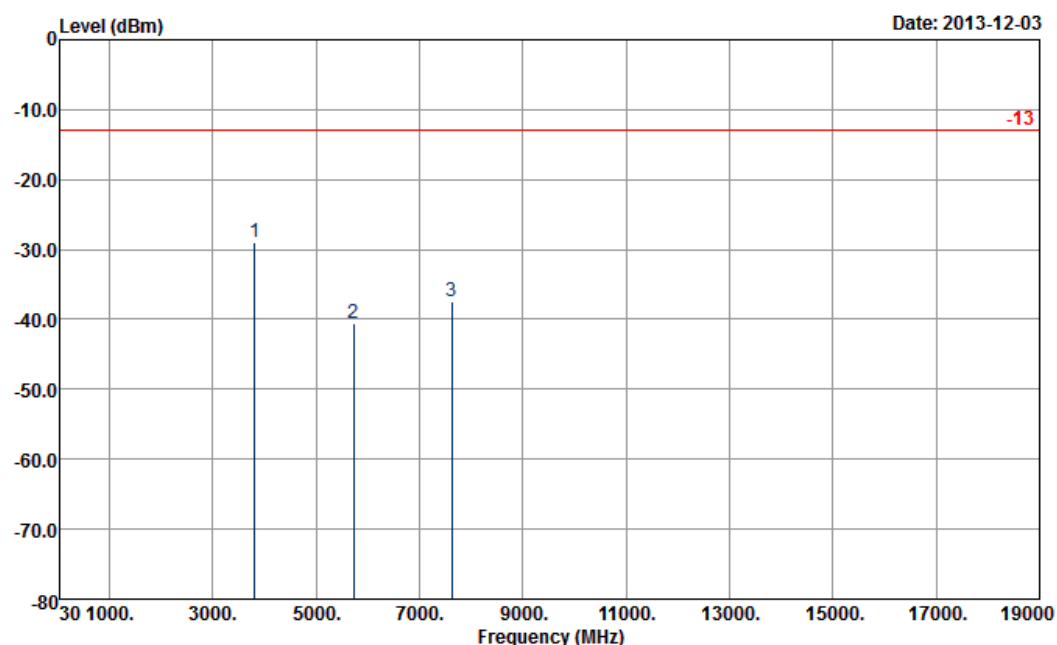


Site : 03CH07-HY
 Condition : -13 HF-EIRP(080306) HORIZONTAL

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3812	-29.01	-13	-16.01	-44.58	-35.42	2.47	8.88	H	Pass
5723	-40.65	-13	-27.65	-61.76	-48.35	3	10.70	H	Pass
7627	-37.51	-13	-24.51	-63.97	-46.29	3.43	12.21	H	Pass

Other harmonics are lower than background noise

Band :	WCDMA Band II	Temperature :	21~23°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Channel :	9538	Polarization :	Vertical
Test Engineer :	Eric Shih		

Remark :	1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line. 2. The harmonic (5 th , 6 th , 7 th ,...etc.) and other spurious are not reported, because those levels are lower than average limit line and background noise.
-----------------	---

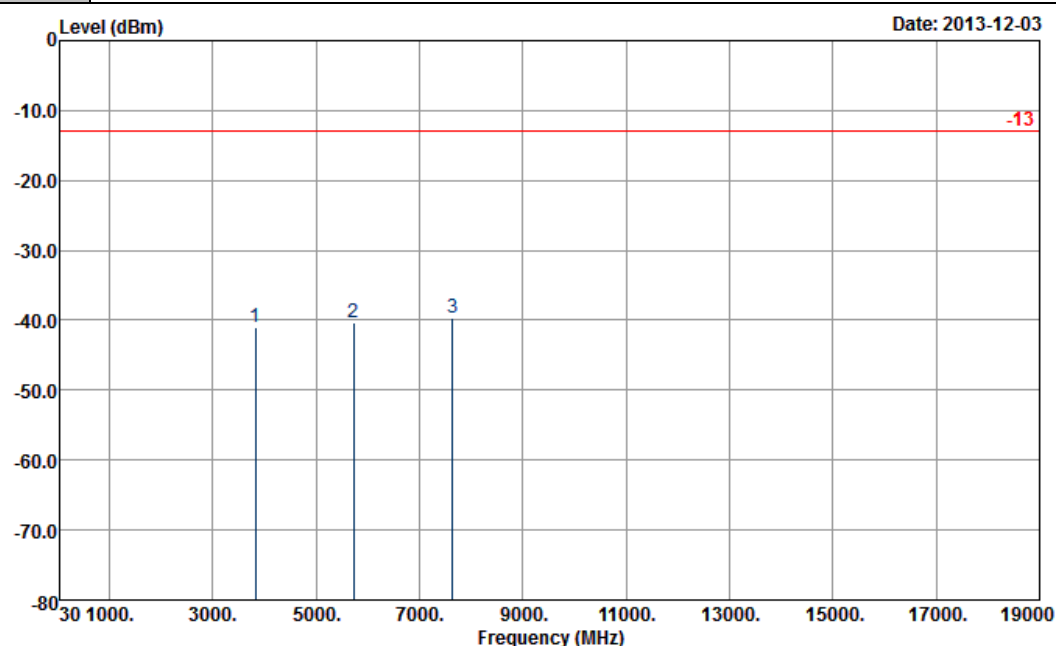

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3819	-41.02	-13	-28.02	-57.54	-47.43	2.47	8.88	V	Pass
5723	-40.30	-13	-27.30	-61.11	-48	3	10.70	V	Pass
7634	-39.60	-13	-26.60	-65.91	-48.38	3.43	12.21	V	Pass

Other harmonics are lower than background noise

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

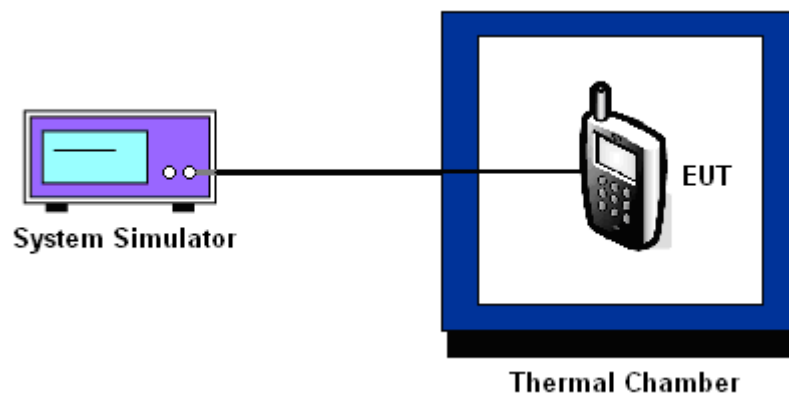

3.8.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GPRS class 8		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	43	0.05	37	0.04	PASS
-20	40	0.05	40	0.05	
-10	38	0.04	34	0.04	
0	36	0.04	31	0.04	
10	32	0.04	32	0.04	
20	33	0.04	29	0.03	
30	31	0.04	31	0.04	
40	34	0.04	34	0.04	
50	37	0.04	38	0.04	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	GPRS class 8		EDGE class 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	87	0.05	82	0.04	PASS
-20	84	0.04	80	0.04	
-10	82	0.04	79	0.04	
0	83	0.04	74	0.04	
10	79	0.04	69	0.04	
20	77	0.04	70	0.04	
30	74	0.04	71	0.04	
40	73	0.04	73	0.04	
50	76	0.04	76	0.04	

Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-13	-0.02	PASS
-20	-10	-0.01	
-10	-9	-0.01	
0	-7	-0.01	
10	6	0.01	
20	-6	-0.01	
30	-8	-0.01	
40	-5	-0.01	
50	-10	-0.01	

Band :	WCDMA Band IV	Channel :	1413
Limit (ppm) :	2.5	Frequency :	1732.6 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-26	-0.02	PASS
-20	-17	-0.01	
-10	-15	-0.01	
0	-11	-0.01	
10	-10	-0.01	
20	-12	-0.01	
30	-16	-0.01	
40	-20	-0.01	
50	-19	-0.01	



Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-17	-0.01	PASS
-20	-14	-0.01	
-10	-12	-0.01	
0	-12	-0.01	
10	-11	-0.01	
20	-9	0.00	
30	-10	-0.01	
40	-10	-0.01	
50	-12	-0.01	

3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS class 8	3.8	34	0.04	2.5	PASS
		BEP	35	0.04		
		4.2	32	0.04		
	EDGE class 8	3.8	32	0.04		
		BEP	35	0.04		
		4.2	36	0.04		
GSM 1900 CH661	GPRS class 8	3.8	82	0.04		
		BEP	83	0.04		
		4.2	81	0.04		
	EDGE class 8	3.8	67	0.04		
		BEP	80	0.04		
		4.2	84	0.04		
WCDMA Band V CH4182	RMC 12.2Kbps	3.8	6	0.01		
		BEP	-5	-0.01		
		4.2	-5	-0.01		
WCDMA Band IV CH1413	RMC 12.2Kbps	3.8	-14	-0.01		
		BEP	-15	-0.01		
		4.2	-12	-0.01		
WCDMA Band II CH9400	RMC 12.2Kbps	3.8	8	0.00		
		BEP	-11	-0.01		
		4.2	-10	-0.01		

Note:

1. Normal Voltage = 3.8V.
2. Battery End Point (BEP) = 3.4 V.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	Rohde & Schwarz	CMU200	117995	N/A	Aug. 01, 2013	Dec. 01, 2013~ Dec. 05, 2013	Jul. 31, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Dec. 01, 2013~ Dec. 05, 2013	Jun. 06, 2014	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-93070 1	N/A	Jul. 19, 2013	Dec. 01, 2013~ Dec. 05, 2013	Jul. 18, 2014	Conducted (TH02-HY)
Filter	WAINWRIGHT	whkx2..0/18 g	N/A	2GHighPass Filter	Nov. 28, 2013	Dec. 01, 2013~ Dec. 05, 2013	Nov. 27, 2014	Conducted (TH02-HY)
RF cable	WOKEN	SMA(M)-S MA(M) for	S05-13070 3-32	N/A	Jul. 09, 2013	Dec. 01, 2013~ Dec. 05, 2013	Jul. 08, 2014	Conducted (TH02-HY)
Hygrometer	Testo	608-H1	34897199	N/A	May 07, 2013	Dec. 01, 2013~ Dec. 05, 2013	May 06, 2014	Conducted (TH02-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 10, 2013	Dec. 03, 2013~ Dec. 28, 2013	Oct. 09, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 22, 2013	Dec. 03, 2013~ Dec. 28, 2013	Aug. 21, 2014	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBEC K	BBHA 9170	BBHA9170 251	15GHz- 40GHz	Oct. 03, 2013	Dec. 03, 2013~ Dec. 28, 2013	Oct. 02, 2014	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	30MHz~1GHz	Feb. 26, 2013	Dec. 03, 2013~ Dec. 28, 2013	Feb. 25, 2014	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A0236 2	1GHz~26.5GHz	Nov. 29, 2013	Dec. 03, 2013~ Dec. 28, 2013	Nov. 28, 2014	Radiation (03CH07-HY)
Filter	Microwave Circuits	H1G013G1	SN477215	1GHz HPF	Nov. 28, 2013	Dec. 03, 2013~ Dec. 28, 2013	Nov. 27, 2014	Radiation (03CH07-HY)
Filter	Wainwright Instruments	WHKX1.5G /15G-10SS	SN32	1.5GHz HPF	Nov. 28, 2013	Dec. 03, 2013~ Dec. 28, 2013	Nov. 27, 2014	Radiation (03CH07-HY)
Filter	Wainwright Instruments	WLKS1200- 8SS	SN3	1.2GHz LPF	Nov. 28, 2013	Dec. 03, 2013~ Dec. 28, 2013	Nov. 27, 2014	Radiation (03CH07-HY)
Filter	Wainwright Instruments	WHKX2.0/1 8G-10SS	SN12	2GHz HPF	Nov. 28, 2013	Dec. 03, 2013~ Dec. 28, 2013	Nov. 27, 2014	Radiation (03CH07-HY)
Filter	Microwave Circuits	H3G018G1	SN477220	3GHz HPF	Nov. 28, 2013	Dec. 03, 2013~ Dec. 28, 2013	Nov. 27, 2014	Radiation (03CH07-HY)
Notch Filter	Wainwright	WRCT 1800/2000-	SN1	GSM 1900	Nov. 28, 2013	Dec. 03, 2013~ Dec. 28, 2013	Nov. 27, 2014	Radiation (03CH07-HY)
Notch Filter	Wainwright	WRCG 824/849/81 4/859-40 8SS	SN35	GSM850 / WCDMA 850	Nov. 28, 2013	Dec. 03, 2013~ Dec. 28, 2013	Nov. 27, 2014	Radiation (03CH07-HY)
Notch Filter	Wainwright	WRCG 1710/1755-	SN2	LTE Band 4	Nov. 28, 2013	Dec. 03, 2013~ Dec. 28, 2013	Nov. 27, 2014	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
HF RF Cable	HUBER SUHNER	SUCOFLEX 104	38411/6	1GHz ~ 18GHz	Nov. 28, 2013	Dec. 03, 2013~ Dec. 28, 2013	Nov. 27, 2014	Radiation (03CH07-HY)
LF RF Cable	Warison+HUBER SUHNER	WCBA-WC 04NM.NM2	N/A	30MHz ~ 1GHz	Nov. 28, 2013	Dec. 03, 2013~ Dec. 28, 2013	Nov. 27, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Dec. 03, 2013~ Dec. 28, 2013	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	M-400-0	114/80006 04/L	N/A	N/A	Dec. 03, 2013~ Dec. 28, 2013	N/A	Radiation (03CH07-HY)
Test Software	Audix	E3	Version 6.2009-08-	N/A	N/A	Dec. 03, 2013~ Dec. 28, 2013	N/A	Radiation (03CH07-HY)
Hygrometer	Testo	608-H1	34897197	N/A	May 07, 2013	Dec. 03, 2013~ Dec. 28, 2013	May 06, 2014	Radiation (03CH07-HY)

Note: Test equipment calibration is traceable to the procedure of ISO17025.

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.50
--	------