


FCC SAR Test Report

APPLICANT : Sony Mobile Communications AB
EQUIPMENT : Smart phone
BRAND NAME : SONY
MODEL NAME : D2306
TYPE NAME : PM-0723-BV
FCC ID : PY7PM-0723
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

1. Statement of Compliance	4
2. Administration Data	8
2.1 Testing Laboratory	8
2.2 Applicant	8
2.3 Manufacturer	8
2.4 Application Details	8
3. General Information	9
3.1 Description of Equipment Under Test (EUT)	9
3.2 Device Serial Number	10
3.3 Maximum RF output power among production units	10
3.4 Applied Standard	16
3.5 Device Category and SAR Limits	16
3.6 Test Conditions	16
4. Specific Absorption Rate (SAR)	17
4.1 Introduction	17
4.2 SAR Definition	17
5. SAR Measurement System	18
5.1 E-Field Probe	19
5.2 Data Acquisition Electronics (DAE)	20
5.3 Robot	20
5.4 Measurement Server	20
5.5 Phantom	21
5.6 Device Holder	22
5.7 Data Storage and Evaluation	23
5.8 Test Equipment List	25
6. Tissue Simulating Liquids	26
7. System Verification Procedures	28
7.1 Purpose of System Performance check	28
7.2 System Setup	28
7.3 SAR System Verification Results	29
8. EUT Testing Position	30
8.1 Define two imaginary lines on the handset	30
8.2 Cheek Position	31
8.3 Tilted Position	31
8.4 Body Worn Position	32
9. Measurement Procedures	33
9.1 Spatial Peak SAR Evaluation	33
9.2 Power Reference Measurement	34
9.3 Area & Zoom Scan Procedures	34
9.4 Volume Scan Procedures	35
9.5 SAR Averaged Methods	35
9.6 Power Drift Monitoring	35
10. Bluetooth Exclusions Applied	35
11. Conducted RF Output Power (Unit: dBm)	36
12. Antenna Location	60
13. SAR Test Results	61
13.1 Head SAR	62
13.2 Hotspot SAR	65
13.3 Body Worn SAR	70
13.4 Repeated SAR Measurement	72
14. Simultaneous Transmission Analysis	73
14.1 Head Exposure Conditions	74
14.2 Hotspot Exposure Conditions	86
14.3 Body-Worn Exposure Conditions	92
15. Uncertainty Assessment	98
16. References	101
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA3N1535	Rev. 01	Initial issue of report	Jan. 23, 2014
FA3N1535	Rev. 02	1. Modify WiFi direct description on page9, page56, page67. 2. Add NII frequency band simultaneously with other wireless technologies on page5. 3. Remove frequency 5600 MHz ~ 5650 MHz WLAN SAR test results and conducted power in the report 4. Corrected typo on page13.	Feb. 19, 2014
FA3N1535	Rev. 03	1. Add LTE Band 2 information and SAR testing results in the report. 2. Add ANT+ feature on page9.	Mar. 26, 2014

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Sony Mobile Communications AB Smart phone, D2306** are as follows.

<Highest 1g-SAR Summary>

Exposure Position	Frequency Band	Equipment Class	Maximum RF output power (dBm)	Reported 1g-SAR (W/kg)	Highest Reported 1g-SAR (W/kg)
Head (Separation 0cm)	GSM850 Voice	PCE	33.50	0.50	0.84
	GSM1900 (DTM11)		21.65	0.28	
	WCDMA Band V		24.00	0.65	
	WCDMA Band IV		24.00	0.45	
	WCDMA Band II		24.00	0.58	
	LTE Band 17		24.00	0.17	
	LTE Band 4		24.00	0.52	
	LTE Band 2		22.50	0.41	
	LTE Band 7		24.00	0.58	
	WLAN 5.2GHz Band	NII	14.00	0.14	
	WLAN 5.3GHz Band		14.00	0.18	
	WLAN 5.5GHz Band		14.00	0.12	
	WLAN 5.8GHz Band	DTS	14.00	0.25	
	WLAN 2.4GHz Band		17.00	0.84	
Hotspot (Separation 1cm)	GPRS850 (4Tx slots)	PCE	27.50	0.56	1.36
	GPRS1900(1Tx slot)		27.50	1.00	
	WCDMA Band V		24.00	0.69	
	WCDMA Band IV		20.00	1.06	
	WCDMA Band II		19.00	1.36	
	LTE Band 17		24.00	0.26	
	LTE Band 4		21.00	0.96	
	LTE Band 2		19.00	1.27	
	LTE Band 7		21.50	0.99	
	WLAN 5.8GHz Band	DTS	14.00	0.20	
	WLAN 2.4GHz Band		17.00	0.20	
Body-worn (Separation 1.5cm)	GSM850 Voice	PCE	33.50	0.55	1.29
	EDGE1900 (4Tx slots)		25.90	0.80	
	WCDMA Band V		24.00	0.57	
	WCDMA Band IV		24.00	1.12	
	WCDMA Band II		24.00	1.29	
	LTE Band 17		24.00	0.22	
	LTE Band 4		24.00	0.88	
	LTE Band 2		22.50	1.01	
	LTE Band 7		24.00	0.95	
	WLAN 5.2GHz Band	NII	14.00	0.08	
	WLAN 5.3GHz Band		14.00	0.09	
	WLAN 5.5GHz Band		14.00	0.10	
	WLAN 5.8GHz Band	DTS	14.00	0.11	
	WLAN 2.4GHz Band		17.00	0.09	

<Highest Simultaneous transmission 1gSAR>

Exposure Position	Frequency Band	Equipment Class	Maximum RF output power (dBm)	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
Head (Separation 0cm)	WCDMA Band V	PCE	24.00	1.48
	WLAN 2.4GHz Band	DTS	17.00	
	WCDMA Band V	PCE	24.00	0.82
	WLAN 5.3GHz Band	NII	14.00	
	WCDMA Band V	PCE	24.00	1.03
	Bluetooth	DSS	9.50	
Hotspot (Separation 1cm)	WCDMA Band II	PCE	19.00	1.36
	WLAN 2.4GHz Band	DTS	17.00	
	WCDMA Band II	PCE	19.00	1.36
	Bluetooth	DSS	9.50	
Body-worn (Separation 1.5cm)	WCDMA Band II	PCE	24.00	1.37
	WLAN 2.4GHz Band	DTS	14.00	
	WCDMA Band II	PCE	24.00	1.33
	WLAN 5.5GHz Band	NII	14.00	
	WCDMA Band II	PCE	24.00	1.42
	Bluetooth	DSS	9.50	

Note: Simultaneous transmission was not evaluated as the sum of the individual SAR for WWAN and WLAN/Bluetooth was < 1.6 W/kg. This meets the requirements and simultaneous transmission exclusion specified in FCC KDB publication 648474 D04v01r02 - SAR Handset SAR.

<Highest 10g-SAR Summary>

Exposure Position	Frequency Band	Maximum RF output power (dBm)	Reported 10g-SAR (W/kg)	Highest Reported 10g-SAR (W/kg)
Head (Separation 0cm)	GSM850 Voice	33.50	0.38	0.49
	GSM1900 (DTM11)	21.65	0.16	
	WCDMA Band V	24.00	0.49	
	WCDMA Band IV	24.00	0.28	
	WCDMA Band II	24.00	0.35	
	LTE Band 17	24.00	0.13	
	LTE Band 4	24.00	0.31	
	LTE Band 2	22.50	0.25	
	LTE Band 7	24.00	0.30	
	WLAN 5.2GHz Band	14.00	0.04	
	WLAN 5.3GHz Band	14.00	0.05	
	WLAN 5.5GHz Band	14.00	0.06	
	WLAN 5.8GHz Band	14.00	0.10	
	WLAN 2.4GHz Band	17.00	0.39	
Hotspot (Separation 1cm)	GPRS850(4Tx slots)	27.50	0.41	0.70
	GPRS1900(1Tx slot)	27.50	0.51	
	WCDMA Band V	24.00	0.54	
	WCDMA Band IV	20.00	0.56	
	WCDMA Band II	19.00	0.70	
	LTE Band 17	24.00	0.21	
	LTE Band 4	21.00	0.51	
	LTE Band 2	19.00	0.66	
	LTE Band 7	21.50	0.52	
	WLAN 5.8GHz Band	14.00	0.06	
	WLAN 2.4GHz Band	17.00	0.09	
Body-worn (Separation 1.5cm)	GSM850 Voice	33.50	0.43	0.74
	EDGE1900 (4Tx slots)	25.90	0.44	
	WCDMA Band V	24.00	0.42	
	WCDMA Band IV	24.00	0.66	
	WCDMA Band II	24.00	0.74	
	LTE Band 17	24.00	0.17	
	LTE Band 4	24.00	0.52	
	LTE Band 2	22.50	0.58	
	LTE Band 7	24.00	0.53	
	WLAN 5.2GHz Band	14.00	0.03	
	WLAN 5.3GHz Band	14.00	0.03	
	WLAN 5.5GHz Band	14.00	0.03	
	WLAN 5.8GHz Band	14.00	0.04	
	WLAN 2.4GHz Band	17.00	0.05	

**<Highest Simultaneous transmission 10gSAR>**

Exposure Position	Frequency Band	Maximum RF output power (dBm)	Highest Reported Simultaneous Transmission 10g-SAR (W/kg)
Head (Separation 0cm)	WCDMA Band V	24.00	0.88
	WLAN 2.4GHz Band	17.00	
	WCDMA Band V	24.00	0.55
	WLAN 5.5GHz Band	14.00	
	WCDMA Band V	24.00	0.64
	Bluetooth	9.50	
Hotspot (Separation 1cm)	WCDMA Band II	19.00	0.70
	WLAN 2.4GHz Band	17.00	
	WCDMA Band II	19.00	0.70
	Bluetooth	9.50	
Body-worn (Separation 1.5cm)	WCDMA Band II	24.00	0.78
	WLAN 2.4GHz Band	17.00	
	WCDMA Band II	24.00	0.74
	WLAN 5.5GHz Band	14.00	
	WCDMA Band II	24.00	0.79
	Bluetooth	9.50	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

2. Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

2.2 Applicant

Company Name	Sony Mobile Communications AB
Address	Nya Vattentornet, 22188 Lund, Sweden

2.3 Manufacturer

Company Name	Compal Communications, INC.
Address	No. 385, Yangguang Street, Neihu, Taipei 11491, Taiwan

2.4 Application Details

Date of Start during the Test	Dec. 18, 2013
Date of End during the Test	Mar. 26, 2014

3. General Information

3.1 Description of Equipment Under Test (EUT)

The equipment under test is a smart phone supporting, GSM850/900/1800/1900, UMTS I / II / IV / V, LTE Band 2 / 4 / 7 / 17, WLAN2.4GHz 802.11 a/b/g/n, Bluetooth, FM Receiver and GPS features, and below is details of information. For FCC, only wireless modes in US frequency bands are tested.

Product Feature & Specification	
EUT	Smart phone
Brand Name	SONY
Model Name	D2306
Type Name	PM-0723-BV
FCC ID	PY7PM-0723
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	• GSM/GPRS/EGPRS • RMC/AMR 12.2Kbps Rel 99 • HSDPA Rel 7, Cat14 • HSUPA Rel 6, Cat6 • DC-HSDPA Rel 8, Cat24 • LTE: QPSK, 16QAM • 802.11a/b/g/n HT20/HT40 • Bluetooth v3.0+EDR , Bluetooth v4.0+LE • NFC: ASK • ANT+
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna NFC: Loop Antenna
HW Version	A
SW Version	18.0.C.0.30
Dual Transfer Mode Category	Class A – EUT can support Packet Switched and Circuit Switched Network simultaneously.
EUT Stage	Production Unit
Remark: 1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description. 2. 802.11n-HT40 is not supported in 2.4GHz WLAN and 5GHz WLNA operated in 5600 MHz ~ 5650 MHz is notched. 3. This device supports VoIP in GSM, WCDMA, LTE (e.g. 3rd part VoIP) and supports GRPS/EGPRS mode up to multi-slot class33 and supports DTM up to multi-slot class11. 4. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900 band, UMTS band 2 and 4, LTE band 2 / 4 and 7. 5. This device 2.4GHz WLAN supports Hotspot operation, and 2.4GHz / 5.8GHz WLAN supports WiFi Direct (Group Client / Group Owner), and 5.2GHz / 5.3GHz / 5.5GHz supports WiFi Direct (Group Client only).	

3.2 Device Serial Number

Sample	Serial Number	IMEI Code
GSM/UMTS SAR measurements	ZH8001PF4F	004402451650976
LTE SAR measurements	ZH8001PF3T	004402451650950
WLAN SAR measurements	ZH8001NA60	004402451443653
GSM/UMTS Conducted measurements	ZH8001PF4F	004402451650976
LTE Conducted measurements	ZH8001PF3T	004402451650950
BT/WLAN Conducted measurements	ZH8001NA4U	004402451443497

Note: Several samples were used with identical hardware to support SAR testing. The manufacturer has confirmed that the device tested gave the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.

3.3 Maximum RF output power among production units

Mode		Burst average power(dBm)		
		GSM 850	GSM 1900	
		Full power mode	Full power mode	Reduced power mode
GSM (GMSK, 1 Tx slot)		33.50	30.50	27.50
GPRS (GMSK, 1 Tx slot)		33.50	30.50	27.50
GPRS (GMSK, 2 Tx slots)		30.50	27.50	24.50
GPRS (GMSK, 3 Tx slots)		28.50	25.50	22.50
GPRS (GMSK, 4 Tx slots)		27.50	24.50	21.50
EDGE (8PSK, 1 Tx slot)		27.50	26.50	22.00
EDGE (8PSK, 2 Tx slots)		27.30	26.30	21.80
EDGE (8PSK, 3 Tx slots)		27.10	26.10	21.60
EDGE (8PSK, 4 Tx slots)		26.90	25.90	21.40
DTM 5	GSM (GMSK, 1 Tx slot)	30.50	27.50	24.50
	GPRS (GMSK, 1 Tx slot)	30.50	27.50	24.50
DTM 9	GSM (GMSK, 1 Tx slot)	30.50	27.50	24.50
	GPRS (GMSK, 1 Tx slot)	30.50	27.50	24.50
DTM11	GSM (GMSK, 1 Tx slot)	28.50	25.50	22.50
	GPRS (GMSK, 2 Tx slots)	28.50	25.50	22.50
DTM 5	GSM (GMSK, 1 Tx slot)	30.50	27.50	24.50
	EDGE (8PSK, 1 Tx slot)	27.30	26.30	21.80
DTM 9	GSM (GMSK, 1 Tx slot)	30.50	27.50	24.50
	EDGE (8PSK, 1 Tx slot)	27.30	26.30	21.80
DTM 11	GSM (GMSK, 1 Tx slot)	28.50	25.50	22.50
	EDGE (8PSK, 2 Tx slots)	27.10	26.10	21.60

Mode		Average power(dBm)			
		WCDMA Band V	WCDMA Band II		WCDMA Band IV
		Full power mode	Full power mode	Reduced power mode	Full power mode
AMR 12.2Kbps		24.0	24.0	19.0	24.0
RMC 12.2Kbps		24.0	24.0	19.0	24.0
HSDPA Subtest-1		24.0	24.0	19.0	24.0
DC-HSDPA Subtest-1		24.0	24.0	19.0	24.0
HSUPA Subtest-5		24.0	24.0	19.0	24.0

LTE Band 17				
Average Power (dBm)				
Modulation	BW (MHz)	RB size	Full power mode MPR	Full Power
QPSK	10	≤ 12	0	24.0
QPSK	10	> 12	1	23.0
16QAM	10	≤ 12	1	23.0
16QAM	10	> 12	2	22.0
QPSK	5	≤ 8	0	24.0
QPSK	5	> 8	1	23.0
16QAM	5	≤ 8	1	23.0
16QAM	5	> 8	2	22.0

LTE Band 4						
Average Power (dBm)						
Modulation	BW (MHz)	RB size	Full power mode MPR	Full Power	Reduced power mode MPR	Reduced Power
QPSK	20	≤ 18	0	24.0	0	21.0
QPSK	20	> 18	1	23.0	0	21.0
16QAM	20	≤ 18	1	23.0	0	21.0
16QAM	20	> 18	2	22.0	0	21.0
QPSK	15	≤ 16	0	24.0	0	21.0
QPSK	15	> 16	1	23.0	0	21.0
16QAM	15	≤ 16	1	23.0	0	21.0
16QAM	15	> 16	2	22.0	0	21.0
QPSK	10	≤ 12	0	24.0	0	21.0
QPSK	10	> 12	1	23.0	0	21.0
16QAM	10	≤ 12	1	23.0	0	21.0
16QAM	10	> 12	2	22.0	0	21.0
QPSK	5	≤ 8	0	24.0	0	21.0
QPSK	5	> 8	1	23.0	0	21.0
16QAM	5	≤ 8	1	23.0	0	21.0
16QAM	5	> 8	2	22.0	0	21.0
QPSK	3	≤ 4	0	24.0	0	21.0
QPSK	3	> 4	1	23.0	0	21.0
16QAM	3	≤ 4	1	23.0	0	21.0
16QAM	3	> 4	2	22.0	0	21.0
QPSK	1.4	≤ 5	0	24.0	0	21.0
QPSK	1.4	> 5	1	23.0	0	21.0
16QAM	1.4	≤ 5	1	23.0	0	21.0
16QAM	1.4	> 5	2	22.0	0	21.0



LTE Band 2						
Average Power (dBm)						
Modulation	BW (MHz)	RB size	Full power mode MPR	Full Power	Reduced power mode MPR	Reduced Power
QPSK	20	≤ 18	0	22.5	0	19.0
QPSK	20	> 18	1	21.5	0	19.0
16QAM	20	≤ 18	1	21.5	0	19.0
16QAM	20	> 18	2	20.5	0	19.0
QPSK	15	≤ 16	0	22.5	0	19.0
QPSK	15	> 16	1	21.5	0	19.0
16QAM	15	≤ 16	1	21.5	0	19.0
16QAM	15	> 16	2	20.5	0	19.0
QPSK	10	≤ 12	0	22.5	0	19.0
QPSK	10	> 12	1	21.5	0	19.0
16QAM	10	≤ 12	1	21.5	0	19.0
16QAM	10	> 12	2	20.5	0	19.0
QPSK	5	≤ 8	0	22.5	0	19.0
QPSK	5	> 8	1	21.5	0	19.0
16QAM	5	≤ 8	1	21.5	0	19.0
16QAM	5	> 8	2	20.5	0	19.0
QPSK	3	≤ 4	0	22.5	0	19.0
QPSK	3	> 4	1	21.5	0	19.0
16QAM	3	≤ 4	1	21.5	0	19.0
16QAM	3	> 4	2	20.5	0	19.0
QPSK	1.4	≤ 5	0	22.5	0	19.0
QPSK	1.4	> 5	1	21.5	0	19.0
16QAM	1.4	≤ 5	1	21.5	0	19.0
16QAM	1.4	> 5	2	20.5	0	19.0

LTE Band 7						
Average Power (dBm)						
Modulation	BW (MHz)	RB size	Full power mode MPR	Full Power	Reduced power mode MPR	Reduced Power
QPSK	20	≤ 18	0	24.0	0	21.5
QPSK	20	> 18	1	23.0	0	21.5
16QAM	20	≤ 18	1	23.0	0	21.5
16QAM	20	> 18	2	22.0	0	21.5
QPSK	15	≤ 16	0	24.0	0	21.5
QPSK	15	> 16	1	23.0	0	21.5
16QAM	15	≤ 16	1	23.0	0	21.5
16QAM	15	> 16	2	22.0	0	21.5
QPSK	10	≤ 12	0	24.0	0	21.5
QPSK	10	> 12	1	23.0	0	21.5
16QAM	10	≤ 12	1	23.0	0	21.5
16QAM	10	> 12	2	22.0	0	21.5
QPSK	5	≤ 8	0	24.0	0	21.5
QPSK	5	> 8	1	23.0	0	21.5
16QAM	5	≤ 8	1	23.0	0	21.5
16QAM	5	> 8	2	22.0	0	21.5

Mode		Maximum Target Average Power (dBm)
2.4GHz	802.11b	17.0
	802.11g	15.0
	802.11n-HT20	14.0
5GHz	802.11a	14.0
	802.11n-HT20	14.0
	802.11n-HT40	14.0
Bluetooth v3.0+EDR		9.5
Bluetooth v4.0+LE		2.75

The table below summarized necessary items addressed in KDB 941225 D05 v02r03.

FCC ID				PY7PM-0723										
EUT				Smart phone										
Operating Frequency Range of each LTE transmission band				LTE Band 17: 706.5 MHz ~ 713.5 MHz										
				LTE Band 4: 1710.7 MHz ~ 1754.3 MHz										
				LTE Band 2: 1850.7 MHz ~ 1909.3 MHz										
				LTE Band 7: 2502.5 MHz ~ 2567.5 MHz										
Channel Bandwidth				LTE Band 17: 5MHz, 10MHz										
				LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz										
				LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz										
				LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz										
Transmission (H, M, L) channel numbers and frequencies in each LTE band														
Band 17														
	Bandwidth 5 MHz					Bandwidth 10 MHz								
	Channel #		Frequency (MHz)			Channel #		Frequency (MHz)						
L	23755		706.5			23780		709						
M	23790		710			23790		710						
H	23825		713.5			23800		711						
LTE Band 4														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720		
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5		
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745		
LTE Band 2														
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz			
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860		
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880		
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900		
LTE Band 7														
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz							
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)		
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510						
M	21100	2535	21100	2535	21100	2535	21100	2535						
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560						
LTE category, uplink modulations used					Category 4, QPSK, and 16QAM									
LTE Voice / Data requirements					Data only									
LTE MPR permanently built-in by design					Yes, per 3GPP TS 36.101 v11.0.0									
					Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3									
					Modulation		Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	
							1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz		
					QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1		
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1							
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2							
LTE A-MPR					In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)									
Base station simulator used for Testing					Anritsu MT8820C									
Power reduction applied to satisfy SAR compliance					Yes, When operating in hotspot mode that LTE band 2 / 4 / 7 power reduction applied to satisfy SAR compliance.									

Target Power reduction applied for each wireless mode

Exposure Position / wireless mode		Hotspot ⁽¹⁾
GSM1900 (GMSK 1 Tx slot) - CS1		3.0 dB
GSM1900 GPRS (GMSK 1 Tx slot) - CS1		3.0 dB
GSM1900 GPRS (GMSK 2 Tx slots) - CS1		3.0 dB
GSM1900 GPRS (GMSK 3 Tx slots) - CS1		3.0 dB
GSM1900 GPRS (GMSK 4 Tx slots) - CS1		3.0 dB
GSM1900 EDGE (8PSK 1 Tx slot) - MCS5		4.5 dB
GSM1900 EDGE (8PSK 2 Tx slots) - MCS5		4.5 dB
GSM1900 EDGE (8PSK 3 Tx slots) - MCS5		4.5 dB
GSM1900 EDGE (8PSK 4 Tx slots) - MCS5		4.5 dB
DTM 5	GSM (GMSK, 1 Tx slot)	3.0 dB
	GPRS (GMSK, 1 Tx slot)	3.0 dB
DTM 9	GSM (GMSK, 1 Tx slot)	3.0 dB
	GPRS (GMSK, 1 Tx slot)	3.0 dB
DTM11	GSM (GMSK, 1 Tx slot)	3.0 dB
	GPRS (GMSK, 2 Tx slots)	3.0 dB
DTM 5	GSM (GMSK, 1 Tx slot)	3.0 dB
	EDGE (8PSK, 1 Tx slot)	4.5 dB
DTM 9	GSM (GMSK, 1 Tx slot)	3.0 dB
	EDGE (8PSK, 1 Tx slot)	4.5 dB
DTM 11	GSM (GMSK, 1 Tx slot)	3.0 dB
	EDGE (8PSK, 2 Tx slots)	4.5 dB
WCDMA Band 2		5.0 dB
WCDMA Band 4		4.0 dB
LTE band 4		3.0 dB
LTE band 2		3.5 dB
LTE band 7		2.5 dB

Remark:

- ⁽¹⁾: Reduced maximum limit applied by activation of Hotspot operation
- When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900 band, UMTS band 2 and 4, LTE band 2 / 4 and 7.
- Power reduction is not applicable for GSM850 Band, UMTS Band 5, LTE Band 5 and 17, WLAN and Bluetooth.

3.4 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 648474 D04 Handset SAR v01r02
- FCC KDB 248227 D01 SAR meas for 802 11abg v01r02
- FCC KDB 941225 D01 SAR test for 3G devices v02
- FCC KDB 941225 D02 HSPA and 1x Advanced v02r02
- FCC KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- FCC KDB 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- FCC KDB 941225 D05 SAR for LTE Devices v02r03
- FCC KDB 941225 D06 Hotspot Mode SAR v01r01

3.5 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.6 Test Conditions

3.5.1 Ambient Condition

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

3.5.2 Test Configuration

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT.

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting

Duty factor observed as below:

802.11b, 1Mbps: 97.63%

802.11a, 6Mbps: 87.26%

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement System

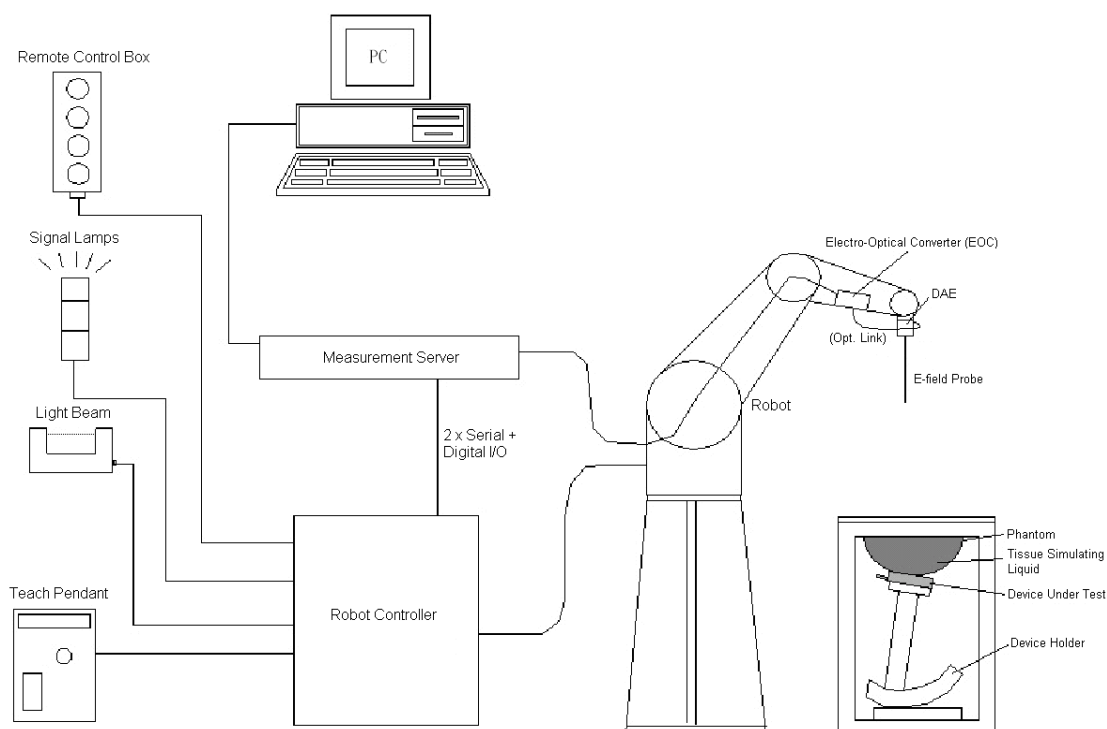


Fig 5.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.

5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

5.1.1 E-Field Probe Specification

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm



Fig 5.2 Photo of EX3DV4/ES3DV4

<ES3DV3 Probe >

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz to 3 GHz; Linearity: ± 0.2 dB
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 10 mm) Tip diameter: 4 mm (Body: 10 mm) Distance from probe tip to dipole centers: 3 mm



Fig 5.3 Photo of ES3DV3

5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.4 Photo of DAE

5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.5 Photo of DASY4

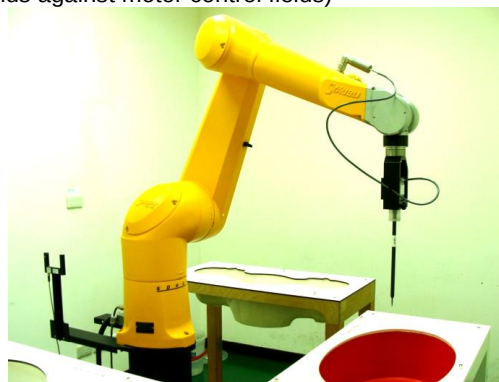


Fig 5.6 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.7 Photo of Server for DASY4



Fig 5.8 Photo of Server for DASY5

5.5 Phantom

<SAM Twin Phantom>

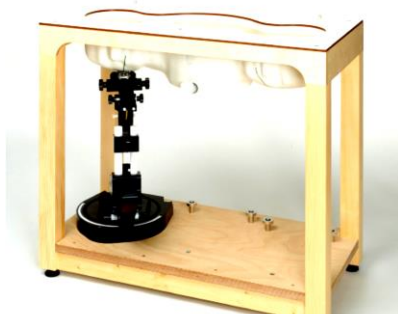
Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

Fig 5.9 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

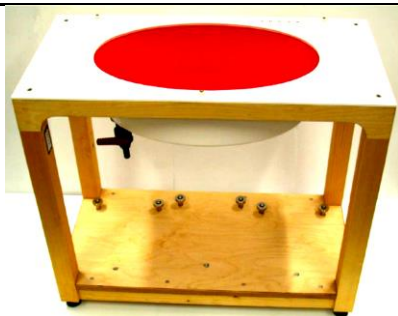
Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

Fig 5.10 Photo of ELI4 Phantom

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

5.6 Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.11 Device Holder

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

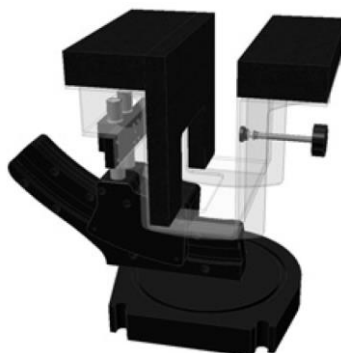


Fig 5.12 Laptop Extension Kit

5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	dcp_i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5.8 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1099	Nov. 11, 2013	Nov. 10, 2014
SPEAG	835MHz System Validation Kit	D835V2	4d162	Nov. 11, 2013	Nov. 10, 2014
SPEAG	1750MHz System Validation Kit	D1750V2	1068	Nov. 27, 2013	Nov. 26, 2014
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	Nov. 12, 2013	Nov. 11, 2014
SPEAG	2450MHz System Validation Kit	D2450V2	924	Nov. 13, 2013	Nov. 12, 2014
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Nov. 13, 2013	Nov. 12, 2014
SPEAG	5GHz System Validation Kit	D5GHzV2	1128	Jul. 24, 2013	Jul. 23, 2014
SPEAG	Data Acquisition Electronics	DAE4	778	Aug. 21, 2013	Aug. 20, 2014
SPEAG	Data Acquisition Electronics	DAE4	1338	Nov. 05, 2013	Nov. 04, 2014
SPEAG	Data Acquisition Electronics	DAE3	577	May. 08, 2013	May. 07, 2014
SPEAG	Data Acquisition Electronics	DAE4	1279	Jan. 28, 2013	Jan. 27, 2014
SPEAG	Data Acquisition Electronics	DAE3	495	May. 08, 2013	May. 07, 2014
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 07, 2013	Nov. 06, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3935	Nov. 04, 2013	Nov. 03, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 10, 2013	Sep. 09, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3661	Jan. 15, 2013	Jan. 14, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	Nov. 04, 2013	Nov. 03, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3898	Jan. 14, 2013	Jan. 13, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	Jun. 12, 2013	Jun. 11, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 12, 2013	Nov. 11, 2014
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 24, 2013	Sep. 23, 2014
Wisewind	Thermometer	ETP-101	TM560	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	ETP-101	TM685	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	HTC-1	TM642	Oct. 22, 2013	Oct. 21, 2014
Wisewind	Thermometer	HTC-1	TM281	Oct. 22, 2013	Oct. 21, 2014
H.M.IRIS	Thermometer	TH-08	TM658	Oct. 22, 2013	Oct. 21, 2014
Anritsu	Radio Communication Analyzer	MT8820C	6201074414	Dec. 11, 2012	Dec. 10, 2014
Agilent	Wireless Communication Test Set	E5515C	MY48360820	Jan. 05, 2012	Jan. 04, 2014
Agilent	Wireless Communication Test Set	E5515C	GB46311322	Mar. 25, 2013	Mar. 24, 2014
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May. 06, 2013	May. 05, 2014
R&S	Radio communication Tester	CMW500	113998	Oct. 04, 2013	Oct. 03, 2014
SPEAG	Device Holder	N/A	N/A	NCR	NCR
R&S	Signal Generator	SMF 100A	101107	May. 27, 2013	May. 26, 2014
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Jul. 23, 2013	Jul. 22, 2014
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 07, 2013	Feb. 06, 2014
Anritsu	Power Meter	ML2495A	1132003	Aug. 28, 2013	Aug. 27, 2014
Anritsu	Power Sensor	MA2411B	1126017	Aug. 27, 2013	Aug. 26, 2014
Agilent	Dual Directional Coupler	778D	50422	Note 2	
Woken	Attenuator 1	WK0602-XX	N/A	Note 2	
PE	Attenuator 2	PE7005-10	N/A	Note 2	
PE	Attenuator 3	PE7005- 3	N/A	Note 2	
AR	Power Amplifier	5S1G4M2	328767	Note 3	
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 09, 2013	Jul. 08, 2014

Table 5.1 Test Equipment List
Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
3. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
4. Attenuator 1 insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.



Fig 6.1 Photo of Liquid Height for Head SAR



Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Table 6.1 Recipes of Tissue Simulating Liquid

Simulating Liquid for 5G, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SPEAG DAK-3.5 Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Head	22.6	0.883	40.810	0.89	41.90	-0.79	-2.60	±5	2013/12/29
750	Body	22.7	0.964	54.284	0.96	55.50	0.42	-2.19	±5	2013/12/29
835	Head	22.6	0.900	40.800	0.90	41.50	0.00	-1.69	±5	2013/12/22
835	Head	22.4	0.885	42.000	0.90	41.50	-1.67	1.20	±5	2014/1/4
835	Body	22.6	0.963	54.500	0.97	55.20	-0.72	-1.27	±5	2013/12/21
835	Body	22.6	0.972	53.000	0.97	55.20	0.21	-3.99	±5	2013/12/22
1750	Head	22.5	1.426	39.341	1.40	40.00	1.86	-1.65	±5	2013/12/28
1750	Body	22.2	1.528	51.762	1.52	53.30	0.53	-2.89	±5	2013/12/26
1750	Body	22.2	1.479	52.368	1.48	52.37	-0.07	0.00	±5	2013/12/26
1750	Body	22.4	1.514	52.223	1.52	53.30	-0.39	-2.02	±5	2013/12/29
1900	Head	22.4	1.388	40.300	1.40	40.00	-0.86	0.75	±5	2013/12/29
1900	Head	22.6	1.440	38.100	1.40	40.00	2.86	-4.75	±5	2014/1/4
1900	Head	22.6	1.432	38.828	1.40	40.00	2.29	-2.93	±5	2014/3/26
1900	Body	22.4	1.531	52.652	1.52	53.30	0.72	-1.22	±5	2013/12/29
1900	Body	22.4	1.530	52.700	1.52	53.30	0.66	-1.13	±5	2014/1/2
1900	Body	22.6	1.530	52.500	1.52	53.30	0.66	-1.50	±5	2014/1/4
1900	Body	22.6	1.568	51.570	1.52	53.30	3.16	-3.25	±5	2014/3/20
1900	Body	22.6	1.534	51.604	1.52	53.30	0.92	-3.18	±5	2014/3/26
2450	Head	22.3	1.833	39.517	1.80	39.20	1.83	0.81	±5	2013/12/19
2450	Body	22.4	1.981	54.191	1.95	52.70	1.59	2.83	±5	2013/12/19
2600	Head	22.2	1.997	37.624	1.96	39.00	1.89	-3.53	±5	2013/12/28
2600	Body	22.5	2.184	53.787	2.16	52.50	1.11	2.45	±5	2013/12/25
2600	Body	22.5	2.201	52.823	2.16	52.50	1.90	0.62	±5	2013/12/26
5200	Head	22.5	4.523	37.628	4.66	36.00	-2.94	4.52	±5	2013/12/18
5200	Body	22.3	5.264	48.303	5.30	49.00	-0.68	-1.42	±5	2013/12/20
5300	Head	22.5	4.630	37.498	4.76	35.87	-2.73	4.54	±5	2013/12/18
5300	Body	22.3	5.404	48.094	5.42	48.88	-0.30	-1.61	±5	2013/12/20
5600	Head	22.5	4.936	37.050	5.06	35.53	-2.45	4.28	±5	2013/12/18
5600	Body	22.3	5.834	47.447	5.77	48.47	1.11	-2.11	±5	2013/12/20
5800	Head	22.3	5.390	34.350	5.27	35.30	2.28	-2.69	±5	2013/12/19
5800	Body	22.6	6.113	47.156	6.00	48.20	1.88	-2.17	±5	2013/12/25

Table 6.2 Measuring Results for Simulating Liquid

7. System Verification Procedures

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

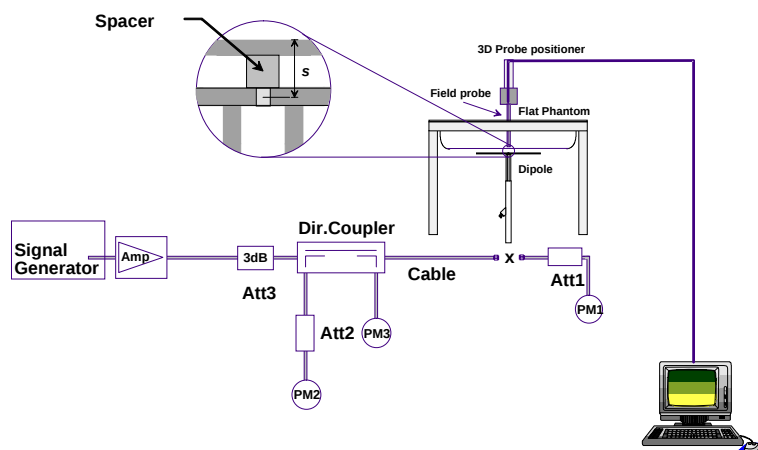


Fig 7.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole



Fig 7.2 Photo of Dipole Setup

7.3 SAR System Verification Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2013/12/29	750	Head	250	D750V3-1099	3898	778	2.13	8.42	8.52	1.19
2013/12/29	750	Body	250	D750V3-1099	3898	778	1.98	8.56	7.92	-7.48
2013/12/22	835	Head	250	D835V2-4d162	3935	1338	2.51	9.53	10.04	5.35
2014/1/4	835	Head	250	D835V2-4d162	3931	1279	2.47	9.53	9.88	3.67
2013/12/21	835	Body	250	D835V2-4d162	3935	1338	2.41	9.28	9.64	3.88
2013/12/22	835	Body	250	D835V2-4d162	3935	1338	2.44	9.28	9.76	5.17
2013/12/28	1750	Head	250	D1750V2-1068	3935	1338	9.90	37.30	39.60	6.17
2013/12/26	1750	Body	250	D1750V2-1068	3935	1279	9.20	37.50	36.80	-1.87
2013/12/26	1750	Body	250	D1750V2-1068	3935	1338	8.90	37.50	35.60	-5.07
2013/12/29	1750	Body	250	D1750V2-1068	3931	577	9.17	37.50	36.68	-2.19
2013/12/29	1900	Head	250	D1900V2-5d182	3931	577	10.10	40.10	40.40	0.75
2014/1/4	1900	Head	250	D1900V2-5d182	3931	1279	10.50	40.10	42.00	4.74
2014/3/26	1900	Head	250	D1900V2-5d182	3270	778	9.70	40.10	38.80	-3.24
2013/12/29	1900	Body	250	D1900V2-5d182	3931	577	9.70	39.50	38.80	-1.77
2014/1/2	1900	Body	250	D1900V2-5d182	3954	1279	10.20	39.50	40.80	3.29
2014/1/4	1900	Body	250	D1900V2-5d182	3931	1279	10.40	39.50	41.60	5.32
2014/3/20	1900	Body	250	D1900V2-5d182	3955	1399	10.10	39.50	40.40	2.28
2014/3/26	1900	Body	250	D1900V2-5d182	3270	778	9.56	39.50	38.24	-3.19
2013/12/19	2450	Head	250	D2450V2-924	3925	495	13.80	52.40	55.20	5.34
2013/12/19	2450	Body	250	D2450V2-924	3925	495	12.50	50.20	50.00	-0.40
2013/12/28	2600	Head	250	D2600V2-SN:1070	3935	1338	15.00	56.60	60.00	6.01
2013/12/25	2600	Body	250	D2600V2-SN:1070	3935	1279	13.90	55.70	55.60	-0.18
2013/12/26	2600	Body	250	D2600V2-SN:1070	3935	1338	14.00	55.70	56.00	0.54
2013/12/18	5200	Head	100	D5GHzV2-1128	3661	577	7.96	78.20	79.60	1.79
2013/12/20	5200	Body	100	D5GHzV2-1128	3925	495	7.64	73.40	76.40	4.09
2013/12/18	5300	Head	100	D5GHzV2-1128	3661	577	7.76	80.60	77.60	-3.72
2013/12/20	5300	Body	100	D5GHzV2-1128	3925	495	7.12	74.30	71.20	-4.17
2013/12/18	5600	Head	100	D5GHzV2-1128	3661	577	8.04	80.50	80.40	-0.12
2013/12/20	5600	Body	100	D5GHzV2-1128	3925	495	8.26	77.80	82.60	6.17
2013/12/19	5800	Head	100	D5GHzV2-1128	3661	1279	8.03	77.20	80.30	4.02
2013/12/25	5800	Body	100	D5GHzV2-1128	3925	495	7.46	72.20	74.60	3.32

Table 7.1 Target and Measurement SAR after Normalized

8. EUT Testing Position

8.1 Define two imaginary lines on the handset

- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

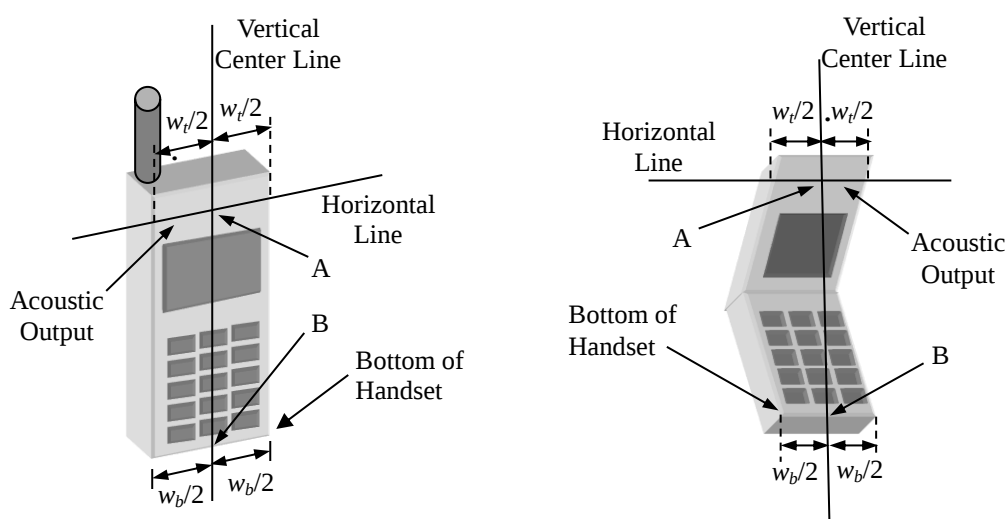


Fig 8.1 Illustration for Handset Vertical and Horizontal Reference Lines

8.2 Cheek Position

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 8.2).

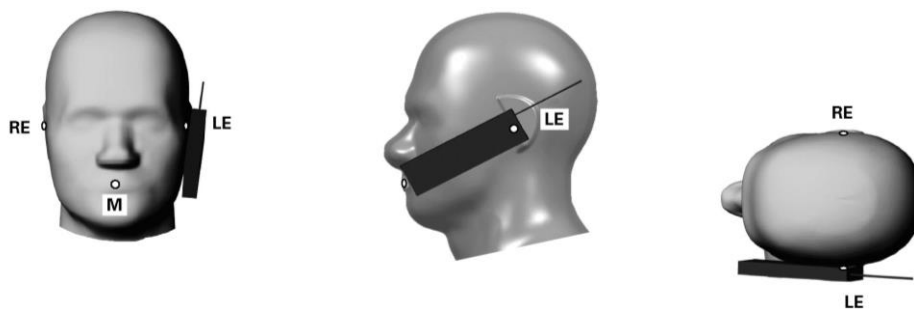


Fig 8.2 Illustration for Cheek Position

8.3 Tilted Position

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 8.3).

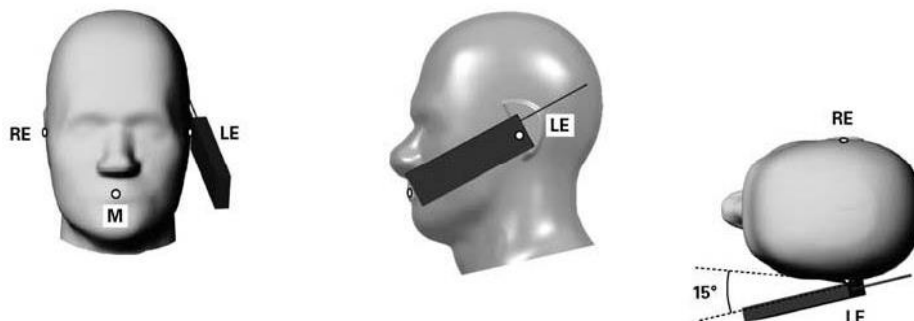


Fig 8.3 Illustration for Tilted Position

8.4 Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1.5 cm.

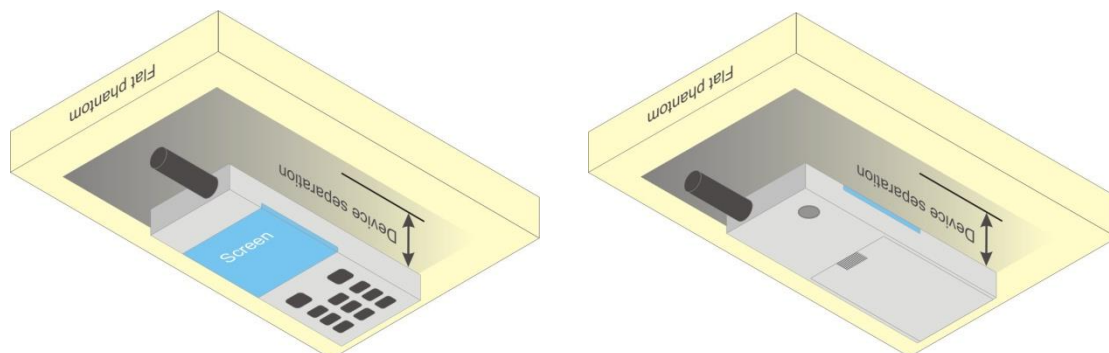


Fig 8.4 Illustration for Body Worn Position

8.5 Hotspot Position

- (a) To position the device parallel to the phantom surface with all sides and either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device and the flat phantom to 1.0cm.

<EUT Setup Photos>

Please refer to Appendix D for the test setup photos.

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r03 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)	
	Bluetooth v3.0+EDR	Bluetooth v4.0+LE
2.4GHz Bluetooth	9.5	2.75

Note:

- Per KDB 447498 D01v05r0, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Test Distance (mm)	Frequency (GHz)	exclusion thresholds
9.5	5	2.48	2.83

- Per KDB 447498 D01v05r02 exclusion thresholds is $2.83 < 3$, RF exposure evaluation is not required.

11. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

Note:

- For DTM multi-slot class mode, the device was linked with base station simulator (Agilent E5515C) and transmit maximum power on maximum number of TX slots, i.e. one CS timeslot, and additional PS timeslots (1 for DTM class 5 and 9, 2 for DTM class 11) in one TDMA frame.
- Agilent E5515C was used to setup the device operated under DTM mode for power measurement and SAR testing. For conducted power, the power of the burst for voice and the power of the bursts for data was reported separately in the table above, and the frame-average power is derived below to determine SAR testing.

$$DTM \text{ frame average power (dBm)} = 10 \cdot \log [\sum (\text{power of each slot, in mW}) / 8]$$
- Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- For Head and Body-worn SAR testing, the EUT was set in GSM Voice for GSM850 and DTM Multi-slot class 11 for GSM1900 due to its highest frame-average power and considering the possibility of e.g. 3rd part VoIP operation was additional EGPRS SAR testing performed on voice mode worse case.
- For hotspot mode SAR testing of GSM850 band, GPRS, EDGE and DTM were evaluated, and EUT was set in GPRS 4 Tx slots due to its highest frame-average power.
- Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 1 Tx slot due to its highest frame-average power.

<Full power mode>

Band GSM850		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		128	189	251		128	189	251	
Frequency (MHz)		824.2	836.4	848.8		824.2	836.4	848.8	
GSM (GMSK, 1 Tx slot)		33.46	33.43	33.37	33.50	24.46	24.43	24.37	24.50
		33.44	33.42	33.39	33.50	24.44	24.42	24.39	24.50
GPRS (GMSK, 2 Tx slots)		30.43	30.43	30.40	30.50	24.43	24.43	24.40	24.50
		28.49	28.45	28.37	28.50	24.23	24.19	24.11	24.24
GPRS (GMSK, 4 Tx slots)		27.49	27.46	27.44	27.50	24.49	24.46	24.44	24.50
		27.30	27.34	27.34	27.50	18.30	18.34	18.34	18.50
EDGE (8PSK, 1 Tx slot)		26.92	26.99	27.04	27.30	20.92	20.99	21.04	21.30
		26.88	26.95	26.97	27.10	22.62	22.69	22.71	22.84
EDGE (8PSK, 3 Tx slots)		26.76	26.75	26.72	26.90	23.76	23.75	23.72	23.90
		26.76	26.75	26.72	26.90	23.76	23.75	23.72	23.90
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.42	30.40	30.38	30.50	24.39	24.37	24.35	24.50
	GPRS (GMSK, 1 Tx slot)	30.41	30.38	30.37	30.50				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.41	30.37	30.36	30.50	24.37	24.34	24.32	24.50
	GPRS (GMSK, 1 Tx slot)	30.38	30.36	30.33	30.50				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	28.47	28.43	28.35	28.50	24.20	24.15	24.08	24.24
	GPRS (GMSK, 2 Tx slots)	28.45	28.40	28.33	28.50				
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.43	30.39	30.35	30.50	22.99	22.98	22.98	23.17
	EDGE (8PSK, 1 Tx slot)	26.90	26.95	27.02	27.30				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	30.41	30.35	30.31	30.50	22.97	22.95	22.95	23.17
	EDGE (8PSK, 1 Tx slot)	26.88	26.94	27.01	27.30				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	28.46	28.41	28.32	28.50	23.20	23.22	23.19	23.36
	EDGE (8PSK, 2 Tx slots)	26.86	26.93	26.94	27.10				

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Hotspot inactive - full power mode>

Band GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM (GMSK, 1 Tx slot)		30.17	30.34	30.47	30.50	21.17	21.34	21.47	21.50
GPRS (GMSK, 1 Tx slot)		30.11	30.36	30.42	30.50	21.11	21.36	21.42	21.50
GPRS (GMSK, 2 Tx slots)		26.51	26.77	27.08	27.50	20.51	20.77	21.08	21.50
GPRS (GMSK, 3 Tx slots)		24.49	24.74	25.06	25.50	20.23	20.48	20.80	21.24
GPRS (GMSK, 4 Tx slots)		23.53	23.71	24.14	24.50	20.53	20.71	21.14	21.50
EDGE (8PSK, 1 Tx slot)		26.08	26.29	26.42	26.50	17.08	17.29	17.42	17.50
EDGE (8PSK, 2 Tx slots)		26.00	26.21	26.27	26.30	20.00	20.21	20.27	20.30
EDGE (8PSK, 3 Tx slots)		25.64	25.87	26.05	26.10	21.38	21.61	21.79	21.84
EDGE (8PSK, 4 Tx slots)		25.35	25.53	25.64	25.90	22.35	22.53	22.64	22.90
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	27.02	27.23	27.40	27.50	20.96	21.17	21.34	21.50
	GPRS (GMSK, 1 Tx slot)	26.94	27.15	27.32	27.50				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	26.98	27.21	27.39	27.50	20.92	21.15	21.33	21.50
	GPRS (GMSK, 1 Tx slot)	26.91	27.13	27.31	27.50				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	24.88	25.20	25.34	25.50	20.59	20.91	21.05	21.24
	GPRS (GMSK, 2 Tx slots)	24.83	25.15	25.29	25.50				
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	26.99	27.30	27.37	27.50	20.50	20.77	20.84	20.92
	EDGE (8PSK, 1 Tx slot)	26.00	26.21	26.29	26.30				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	27.04	27.35	27.45	27.50	20.49	20.80	20.88	20.92
	EDGE (8PSK, 1 Tx slot)	25.90	26.21	26.26	26.30				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	24.68	24.89	25.05	25.50	21.03	21.24	21.40	21.65
	EDGE (8PSK, 2 Tx slots)	25.57	25.78	25.93	26.10				

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Hotspot active - reduced power mode>

Band GSM1900		Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel		512	661	810		512	661	810	
Frequency (MHz)		1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM (GMSK, 1 Tx slot)		26.88	27.19	27.44	27.50	17.88	18.19	18.44	18.50
GPRS (GMSK, 1 Tx slot)		26.84	27.15	27.42	27.50	17.84	18.15	18.42	18.50
GPRS (GMSK, 2 Tx slots)		23.41	23.64	23.96	24.50	17.41	17.64	17.96	18.50
GPRS (GMSK, 3 Tx slots)		21.43	21.73	21.84	22.50	17.17	17.47	17.58	18.24
GPRS (GMSK, 4 Tx slots)		20.65	20.72	20.81	21.50	17.65	17.72	17.81	18.50
EDGE (8PSK, 1 Tx slot)		21.80	21.91	21.97	22.00	12.80	12.91	12.97	13.00
EDGE (8PSK, 2 Tx slots)		21.51	21.68	21.79	21.80	15.51	15.68	15.79	15.80
EDGE (8PSK, 3 Tx slots)		21.32	21.56	21.59	21.60	17.06	17.30	17.33	17.34
EDGE (8PSK, 4 Tx slots)		21.00	21.17	21.27	21.40	18.00	18.17	18.27	18.40
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	23.84	24.19	24.26	24.50	17.82	18.15	18.22	18.50
	GPRS (GMSK, 1 Tx slot)	23.84	24.15	24.22	24.50				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	23.85	24.20	24.25	24.50	17.81	18.16	18.21	18.50
	GPRS (GMSK, 1 Tx slot)	23.81	24.16	24.22	24.50				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	21.94	22.21	22.20	22.50	17.67	17.93	17.92	18.24
	GPRS (GMSK, 2 Tx slots)	21.92	22.18	22.17	22.50				
DTM 5 (2Tx slots)	GSM (GMSK, 1 Tx slot)	24.01	24.35	24.41	24.50	16.91	17.20	17.27	17.34
	EDGE (8PSK, 1 Tx slot)	21.49	21.68	21.79	21.80				
DTM 9 (2Tx slots)	GSM (GMSK, 1 Tx slot)	23.99	24.34	24.40	24.50	16.89	17.19	17.26	17.34
	EDGE (8PSK, 1 Tx slot)	21.48	21.67	21.78	21.80				
DTM 11 (3Tx slots)	GSM (GMSK, 1 Tx slot)	21.44	21.81	21.92	22.50	17.14	17.38	17.43	17.66
	EDGE (8PSK, 2 Tx slots)	21.38	21.55	21.57	21.60				

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

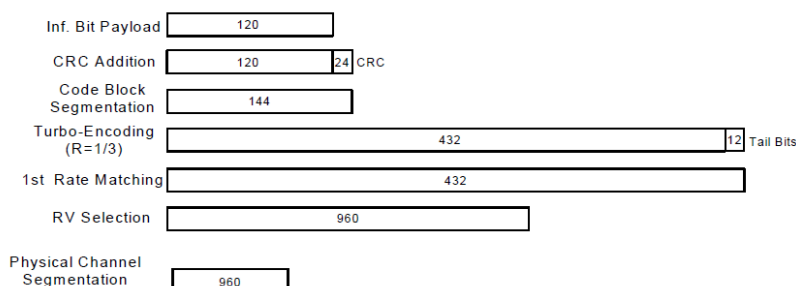
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

**<WCDMA Conducted Power>****Note:**

1. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA / HSUPA / DC-HSDPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is $\leq 1.2\text{W/kg}$, HSDPA / HSUPA / DC-HSDPA SAR evaluation can be excluded.

<Hotspot inactive – full power mode>

Band			WCDMA V			WCDMA II			WCDMA IV		
TX Channel			4132	4182	4233	9262	9400	9538	1312	1413	1513
Frequency (MHz)			826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
MPR (dB)	3GPP Rel 99	AMR 12.2Kbps	23.93	23.82	23.91	23.89	23.75	23.64	23.58	23.73	23.68
	3GPP Rel 99	RMC 12.2Kbps	23.96	23.84	23.93	23.92	23.78	23.66	23.61	23.75	23.69
0	3GPP Rel 6	HSDPA Subtest-1	23.05	23.04	23.07	23.09	22.85	22.79	22.66	22.73	22.73
0	3GPP Rel 6	HSDPA Subtest-2	22.60	22.60	22.60	22.55	22.40	22.38	22.14	22.20	22.09
0.5	3GPP Rel 6	HSDPA Subtest-3	22.69	22.58	22.58	22.56	22.40	22.30	22.13	22.21	22.10
0.5	3GPP Rel 6	HSDPA Subtest-4	22.78	22.81	22.75	23.24	23.00	22.71	22.65	22.71	22.61
0	3GPP Rel 8	DC-HSDPA Subtest-1	22.75	22.84	22.77	23.22	23.02	22.80	22.65	22.71	22.72
0	3GPP Rel 8	DC-HSDPA Subtest-2	22.46	22.45	22.35	22.66	22.52	22.39	22.14	22.20	22.10
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	22.55	22.46	22.31	22.55	22.48	22.33	22.12	22.19	22.12
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	22.59	22.44	22.59	22.50	22.15	22.60	22.17	22.37	22.27
0	3GPP Rel 6	HSUPA Subtest-1	21.68	21.64	21.64	21.31	21.04	21.15	21.97	21.48	21.95
2	3GPP Rel 6	HSUPA Subtest-2	21.89	21.77	21.88	21.49	21.19	21.53	21.63	21.50	21.59
1	3GPP Rel 6	HSUPA Subtest-3	22.26	22.12	22.20	21.60	21.49	21.61	21.44	21.54	21.48
2	3GPP Rel 6	HSUPA Subtest-4	22.89	22.82	22.81	22.97	22.68	22.63	22.54	22.59	22.60
0	3GPP Rel 6	HSUPA Subtest-5	23.96	23.84	23.93	23.92	23.78	23.66	23.61	23.75	23.69

<Hotspot active - reduced power mode>

Band			WCDMA II			WCDMA IV		
TX Channel			9262	9400	9538	1312	1413	1513
Frequency (MHz)			1852.4	1880	1907.6	1712.4	1732.6	1752.6
MPR (dB)	3GPP Rel 99	AMR 12.2Kbps	18.90	18.94	18.79	19.43	19.45	19.44
	3GPP Rel 99	RMC 12.2Kbps	18.25	17.99	18.01	19.43	19.42	19.41
0	3GPP Rel 6	HSDPA Subtest-1	18.25	17.96	17.97	19.41	19.42	19.42
0	3GPP Rel 6	HSDPA Subtest-2	17.87	17.56	17.32	18.78	18.99	19.01
0.5	3GPP Rel 6	HSDPA Subtest-3	17.69	17.49	17.31	18.89	19.04	19.01
0.5	3GPP Rel 6	HSDPA Subtest-4	18.29	17.96	18.02	19.23	19.33	19.34
0	3GPP Rel 8	DC-HSDPA Subtest-1	18.21	17.96	17.80	19.28	19.27	19.32
0	3GPP Rel 8	DC-HSDPA Subtest-2	17.73	17.56	17.35	18.84	18.87	18.98
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	17.80	17.48	17.31	18.87	18.82	18.97
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	18.23	17.81	17.96	19.44	19.45	19.43
0	3GPP Rel 6	HSUPA Subtest-1	17.37	17.18	17.00	18.47	18.40	18.38
2	3GPP Rel 6	HSUPA Subtest-2	17.59	17.40	17.38	18.48	18.59	18.66
1	3GPP Rel 6	HSUPA Subtest-3	17.64	17.51	17.25	18.81	18.92	18.78
2	3GPP Rel 6	HSUPA Subtest-4	18.28	18.22	17.93	19.41	19.43	19.42
0	3GPP Rel 6	HSUPA Subtest-5	18.90	18.94	18.79	19.43	19.45	19.44

**<LTE Conducted Power>****Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, when reported SAR of 1RB and 50%RB allocation for QPSK $\leq 0.8\text{W/kg}$, and 100%RB with QPSK output power is less than 1RB and 50%RB, 100%RB allocation for QPSK is not required.
6. Per KDB 941225 D05v02r03, when reported SAR of 1RB and 50%RB allocation for QPSK $> 0.8\text{W/kg}$ for any exposure position, SAR testing of 100%RB allocation for QPSK is performed at the highest power channel.
7. 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is $\leq 1.45\text{ W/kg}$; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
8. Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is $\leq 1.45\text{ W/kg}$; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.

<LTE Band 17 Conducted Power>
Full power mode

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	Target MPR (dB)
Channel				23780	23790	23800	24	0
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.41	23.42	23.40		
10	QPSK	1	24	23.46	23.45	23.48	23	1
10	QPSK	1	49	23.56	23.60	23.59		
10	QPSK	25	0	22.55	22.46	22.46		
10	QPSK	25	12	22.49	22.46	22.54	23	1
10	QPSK	25	24	22.48	22.51	22.53		
10	QPSK	50	0	22.52	22.51	22.48		
10	16QAM	1	0	22.35	22.41	22.41	23	1
10	16QAM	1	24	22.43	22.40	22.41		
10	16QAM	1	49	22.54	22.52	22.53		
10	16QAM	25	0	21.59	21.60	21.56	22	2
10	16QAM	25	12	21.57	21.58	21.60		
10	16QAM	25	24	21.61	21.59	21.64		
10	16QAM	50	0	21.54	21.57	21.58	24	0
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.45	23.47	23.44	24	0
5	QPSK	1	12	23.43	23.46	23.51		
5	QPSK	1	24	23.49	23.51	23.54		
5	QPSK	12	0	22.45	22.50	22.45	23	1
5	QPSK	12	6	22.45	22.48	22.49		
5	QPSK	12	11	22.55	22.51	22.54		
5	QPSK	25	0	22.58	22.50	22.54	23	1
5	16QAM	1	0	22.45	22.39	22.38		
5	16QAM	1	12	22.42	22.38	22.45		
5	16QAM	1	24	22.46	22.44	22.46	22	2
5	16QAM	12	0	21.55	21.60	21.56		
5	16QAM	12	6	21.54	21.55	21.59		
5	16QAM	12	11	21.63	21.59	21.62	22	2
5	16QAM	25	0	21.61	21.59	21.57		

<LTE Band 4 Conducted Power>
Hotspot inactive - full power mode

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	Target MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.66	23.86	23.69		
20	QPSK	1	49	23.58	23.64	23.66	24	0
20	QPSK	1	99	23.52	23.59	23.49	23	1
20	QPSK	50	0	22.67	22.62	22.75		
20	QPSK	50	24	22.63	22.69	22.70		
20	QPSK	50	49	22.51	22.72	22.62		
20	QPSK	100	0	22.63	22.63	22.69	23	1
20	16QAM	1	0	22.60	22.70	22.61		
20	16QAM	1	49	22.51	22.63	22.55		
20	16QAM	1	99	22.47	22.55	22.40	22	2
20	16QAM	50	0	21.70	21.67	21.78		
20	16QAM	50	24	21.72	21.77	21.73		
20	16QAM	50	49	21.56	21.78	21.56		
20	16QAM	100	0	21.73	21.81	21.74	Tune up Limit (dBm)	Target MPR (dB)
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.67	23.70	23.72	24	0
15	QPSK	1	37	23.59	23.67	23.61		
15	QPSK	1	74	23.61	23.65	23.49		
15	QPSK	36	0	22.62	22.67	22.68	23	1
15	QPSK	36	18	22.60	22.62	22.62		
15	QPSK	36	37	22.58	22.67	22.64		
15	QPSK	75	0	22.65	22.73	22.64		
15	16QAM	1	0	22.60	22.62	22.70	23	1
15	16QAM	1	37	22.52	22.66	22.53		
15	16QAM	1	74	22.54	22.56	22.45		
15	16QAM	36	0	21.69	21.68	21.66	22	2
15	16QAM	36	18	21.62	21.66	21.63		
15	16QAM	36	37	21.66	21.70	21.61		
15	16QAM	75	0	21.72	21.79	21.67		
Channel				20000	20175	20350	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.62	23.62	23.68		
10	QPSK	1	24	23.59	23.62	23.58	24	0
10	QPSK	1	49	23.60	23.62	23.51		
10	QPSK	25	0	22.56	22.61	22.60		
10	QPSK	25	12	22.55	22.58	22.63	23	1
10	QPSK	25	24	22.53	22.59	22.64		
10	QPSK	50	0	22.60	22.71	22.64		
10	16QAM	1	0	22.59	22.60	22.66		
10	16QAM	1	24	22.50	22.59	22.50	23	1
10	16QAM	1	49	22.49	22.50	22.42		
10	16QAM	25	0	21.72	21.69	21.61		
10	16QAM	25	12	21.70	21.73	21.65	22	2
10	16QAM	25	24	21.71	21.74	21.62		
10	16QAM	50	0	21.70	21.72	21.67		



Channel				19975	20175	20375	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.66	23.62	23.61	24	0
5	QPSK	1	12	23.59	23.63	23.62		
5	QPSK	1	24	23.58	23.70	23.53		
5	QPSK	12	0	22.58	22.63	22.61	23	1
5	QPSK	12	6	22.56	22.64	22.64		
5	QPSK	12	11	22.56	22.66	22.57		
5	QPSK	25	0	22.57	22.62	22.58		
5	16QAM	1	0	22.51	22.55	22.55	23	1
5	16QAM	1	12	22.52	22.56	22.53		
5	16QAM	1	24	22.50	22.52	22.44		
5	16QAM	12	0	21.72	21.73	21.68	22	2
5	16QAM	12	6	21.70	21.72	21.65		
5	16QAM	12	11	21.68	21.73	21.53		
5	16QAM	25	0	21.69	21.70	21.54		
Channel				19965	20175	20385	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.58	23.67	23.64	24	0
3	QPSK	1	7	23.61	23.66	23.48		
3	QPSK	1	14	23.63	23.66	23.58		
3	QPSK	8	0	22.61	22.63	22.67	23	1
3	QPSK	8	4	22.58	22.60	22.55		
3	QPSK	8	7	22.58	22.65	22.54		
3	QPSK	15	0	22.60	22.62	22.57		
3	16QAM	1	0	22.53	22.62	22.54	23	1
3	16QAM	1	7	22.48	22.59	22.47		
3	16QAM	1	14	22.55	22.60	22.47		
3	16QAM	8	0	21.70	21.73	21.70	22	2
3	16QAM	8	4	21.73	21.76	21.56		
3	16QAM	8	7	21.69	21.76	21.54		
3	16QAM	15	0	21.64	21.69	21.55		
Channel				19957	20175	20393	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.68	23.72	23.57	24	0
1.4	QPSK	1	2	23.65	23.66	23.56		
1.4	QPSK	1	5	23.63	23.69	23.60		
1.4	QPSK	3	0	23.65	23.76	23.65		
1.4	QPSK	3	1	23.63	23.73	23.62		
1.4	QPSK	3	2	23.62	23.74	23.58		
1.4	QPSK	6	0	22.58	22.68	22.64	23	1
1.4	16QAM	1	0	22.56	22.65	22.61	23	1
1.4	16QAM	1	2	22.56	22.68	22.50		
1.4	16QAM	1	5	22.57	22.64	22.56		
1.4	16QAM	3	0	22.49	22.60	22.54		
1.4	16QAM	3	1	22.55	22.59	22.49		
1.4	16QAM	3	2	22.53	22.58	22.49		
1.4	16QAM	6	0	21.58	21.63	21.51	22	2



<LTE Band 4 Conducted Power>

Hotspot active - reduced power mode

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	Target MPR (dB)
Channel				20050	20175	20300	21	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	20.67	20.81	20.67		
20	QPSK	1	49	20.61	20.62	20.67	21	0
20	QPSK	1	99	20.54	20.64	20.58		
20	QPSK	50	0	20.71	20.63	20.79		
20	QPSK	50	24	20.65	20.68	20.71	21	0
20	QPSK	50	49	20.58	20.73	20.66		
20	QPSK	100	0	20.69	20.74	20.77		
20	16QAM	1	0	20.66	20.79	20.75	21	0
20	16QAM	1	49	20.59	20.61	20.64		
20	16QAM	1	99	20.54	20.60	20.48		
20	16QAM	50	0	20.73	20.70	20.40	21	0
20	16QAM	50	24	20.70	20.73	20.74		
20	16QAM	50	49	20.63	20.76	20.65		
20	16QAM	100	0	20.70	20.72	20.61	21	0
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	20.67	20.71	20.80	21	0
15	QPSK	1	37	20.60	20.67	20.64		
15	QPSK	1	74	20.63	20.66	20.59		
15	QPSK	36	0	20.69	20.71	20.72	21	0
15	QPSK	36	18	20.60	20.69	20.68		
15	QPSK	36	37	20.62	20.71	20.71		
15	QPSK	75	0	20.70	20.78	20.73	21	0
15	16QAM	1	0	20.64	20.67	20.72		
15	16QAM	1	37	20.56	20.62	20.58		
15	16QAM	1	74	20.60	20.61	20.51	21	0
15	16QAM	36	0	20.66	20.64	20.76		
15	16QAM	36	18	20.60	20.67	20.67		
15	16QAM	36	37	20.60	20.70	20.70	21	0
15	16QAM	75	0	20.70	20.76	20.69		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	20.65	20.63	20.74	21	0
10	QPSK	1	24	20.59	20.66	20.66		
10	QPSK	1	49	20.59	20.60	20.60		
10	QPSK	25	0	20.67	20.66	20.67	21	0
10	QPSK	25	12	20.65	20.66	20.69		
10	QPSK	25	24	20.63	20.67	20.72		
10	QPSK	50	0	20.65	20.68	20.72	21	0
10	16QAM	1	0	20.63	20.62	20.65		
10	16QAM	1	24	20.54	20.59	20.58		
10	16QAM	1	49	20.52	20.55	20.51	21	0
10	16QAM	25	0	20.68	20.75	20.73		
10	16QAM	25	12	20.67	20.73	20.77		
10	16QAM	25	24	20.65	20.78	20.73	21	0
10	16QAM	50	0	20.67	20.75	20.69		



FCC SAR Test Report

Report No. : FA3N1535

Channel				19975	20175	20375	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	20.62	20.66	20.70	21	0
5	QPSK	1	12	20.60	20.66	20.65		
5	QPSK	1	24	20.61	20.67	20.62		
5	QPSK	12	0	20.66	20.68	20.74	21	0
5	QPSK	12	6	20.61	20.67	20.68		
5	QPSK	12	11	20.61	20.65	20.65		
5	QPSK	25	0	20.63	20.60	20.65		
5	16QAM	1	0	20.57	20.56	20.60	21	0
5	16QAM	1	12	20.53	20.59	20.55		
5	16QAM	1	24	20.52	20.56	20.48		
5	16QAM	12	0	20.71	20.72	20.76	21	0
5	16QAM	12	6	20.69	20.73	20.74		
5	16QAM	12	11	20.68	20.74	20.62		
5	16QAM	25	0	20.70	20.71	20.62		
Channel				19965	20175	20385	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	20.66	20.68	20.74	21	0
3	QPSK	1	7	20.59	20.66	20.60		
3	QPSK	1	14	20.61	20.71	20.63		
3	QPSK	8	0	20.65	20.67	20.75	21	0
3	QPSK	8	4	20.61	20.65	20.61		
3	QPSK	8	7	20.61	20.70	20.66		
3	QPSK	15	0	20.67	20.67	20.67		
3	16QAM	1	0	20.55	20.61	20.61	21	0
3	16QAM	1	7	20.54	20.59	20.54		
3	16QAM	1	14	20.56	20.61	20.55		
3	16QAM	8	0	20.73	20.70	20.78	21	0
3	16QAM	8	4	20.69	20.76	20.62		
3	16QAM	8	7	20.71	20.73	20.65		
3	16QAM	15	0	20.68	20.71	20.63		
Channel				19957	20175	20393	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	20.67	20.71	20.66	21	0
1.4	QPSK	1	2	20.66	20.69	20.62		
1.4	QPSK	1	5	20.65	20.71	20.68		
1.4	QPSK	3	0	20.66	20.70	20.64		
1.4	QPSK	3	1	20.65	20.72	20.67		
1.4	QPSK	3	2	20.62	20.69	20.67		
1.4	QPSK	6	0	20.65	20.74	20.65	21	0
1.4	16QAM	1	0	20.62	20.61	20.59	21	0
1.4	16QAM	1	2	20.58	20.63	20.59		
1.4	16QAM	1	5	20.59	20.60	20.54		
1.4	16QAM	3	0	20.60	20.62	20.60		
1.4	16QAM	3	1	20.57	20.64	20.57		
1.4	16QAM	3	2	20.58	20.61	20.56		
1.4	16QAM	6	0	20.56	20.63	20.57	21	0

<LTE Band 2 Conducted Power>
Hotspot inactive - full power mode

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	Target MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.30	22.00	21.85		
20	QPSK	1	49	22.21	21.95	21.81	22.5	0
20	QPSK	1	99	21.95	21.85	21.70		
20	QPSK	50	0	21.31	21.09	20.91		
20	QPSK	50	24	21.25	21.05	20.88	21.5	1
20	QPSK	50	49	21.13	20.92	20.83		
20	QPSK	100	0	21.26	20.88	20.85		
20	16QAM	1	0	21.18	20.96	20.82	21.5	1
20	16QAM	1	49	21.16	20.81	20.76		
20	16QAM	1	99	20.89	20.79	20.60		
20	16QAM	50	0	20.34	19.88	19.85	20.5	2
20	16QAM	50	24	20.28	19.85	19.80		
20	16QAM	50	49	20.23	19.79	19.77		
20	16QAM	100	0	20.28	19.80	19.85		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.19	22.05	21.84	22.5	0
15	QPSK	1	37	22.17	21.96	21.75		
15	QPSK	1	74	22.13	21.81	21.67		
15	QPSK	36	0	21.22	21.05	20.90	21.5	1
15	QPSK	36	18	21.20	21.03	20.86		
15	QPSK	36	37	21.19	21.00	20.76		
15	QPSK	75	0	21.21	21.02	20.83	21.5	1
15	16QAM	1	0	21.20	20.98	20.82		
15	16QAM	1	37	21.18	20.85	20.72		
15	16QAM	1	74	21.04	20.77	20.63	20.5	2
15	16QAM	36	0	20.21	20.04	19.83		
15	16QAM	36	18	20.24	19.98	19.74		
15	16QAM	36	37	20.21	19.92	19.73		
15	16QAM	75	0	20.24	20.02	19.77		
Channel				18650	18900	19150		
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.20	22.05	21.76	22.5	0
10	QPSK	1	24	22.16	22.00	21.66		
10	QPSK	1	49	22.13	21.88	21.70		
10	QPSK	25	0	21.19	21.06	20.81	21.5	1
10	QPSK	25	12	21.17	21.04	20.76		
10	QPSK	25	24	21.12	21.02	20.72		
10	QPSK	50	0	21.15	21.05	20.78	21.5	1
10	16QAM	1	0	21.19	20.98	20.77		
10	16QAM	1	24	21.14	20.92	20.69		
10	16QAM	1	49	21.11	20.88	20.68	20.5	2
10	16QAM	25	0	20.23	20.09	19.78		
10	16QAM	25	12	20.20	20.06	19.74		
10	16QAM	25	24	20.15	20.04	19.72		
10	16QAM	50	0	20.13	20.08	19.76		



FCC SAR Test Report

Report No. : FA3N1535

Channel				18625	18900	19175	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.14	22.04	21.72	22.5	0
5	QPSK	1	12	22.13	21.86	21.64		
5	QPSK	1	24	22.09	21.84	21.70		
5	QPSK	12	0	21.15	21.09	20.72	21.5	1
5	QPSK	12	6	21.15	21.07	20.72		
5	QPSK	12	11	21.14	21.05	20.73		
5	QPSK	25	0	21.21	21.06	20.73		
5	16QAM	1	0	21.08	20.95	20.63	21.5	1
5	16QAM	1	12	21.06	20.93	20.61		
5	16QAM	1	24	21.04	20.85	20.60		
5	16QAM	12	0	20.28	20.04	19.80	20.5	2
5	16QAM	12	6	20.26	20.03	19.79		
5	16QAM	12	11	20.22	20.01	19.73		
5	16QAM	25	0	20.25	20.02	19.75		
Channel				18615	18900	19185	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.21	22.07	21.82	22.5	0
3	QPSK	1	7	22.14	22.05	21.80		
3	QPSK	1	14	22.09	22.00	21.69		
3	QPSK	8	0	21.18	21.09	20.76	21.5	1
3	QPSK	8	4	21.15	21.06	20.75		
3	QPSK	8	7	21.10	21.03	20.77		
3	QPSK	15	0	21.16	21.05	20.73		
3	16QAM	1	0	21.19	20.98	20.69	21.5	1
3	16QAM	1	7	21.17	20.91	20.68		
3	16QAM	1	14	21.09	20.78	20.61		
3	16QAM	8	0	20.24	20.10	19.74	20.5	2
3	16QAM	8	4	20.23	20.05	19.76		
3	16QAM	8	7	20.21	20.03	19.71		
3	16QAM	15	0	20.18	19.99	19.70		
Channel				18607	18900	19193	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.25	22.20	21.91	22.5	0
1.4	QPSK	1	2	22.17	22.18	21.88		
1.4	QPSK	1	5	22.15	22.17	21.85		
1.4	QPSK	3	0	22.10	22.14	21.77		
1.4	QPSK	3	1	22.08	22.11	21.74		
1.4	QPSK	3	2	22.05	22.09	21.66		
1.4	QPSK	6	0	21.30	21.12	20.86	21.5	1
1.4	16QAM	1	0	21.19	21.02	20.70	21.5	1
1.4	16QAM	1	2	21.14	21.01	20.66		
1.4	16QAM	1	5	21.09	20.95	20.65		
1.4	16QAM	3	0	21.09	20.89	20.69		
1.4	16QAM	3	1	21.07	20.85	20.64		
1.4	16QAM	3	2	21.05	20.82	20.63		
1.4	16QAM	6	0	20.11	19.96	19.63	20.5	2



<LTE Band 2 Conducted Power>

Hotspot active - reduced power mode

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	Target MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	18.85	18.95	18.91		
20	QPSK	1	49	18.71	18.90	18.84	19	0
20	QPSK	1	99	18.70	18.85	18.76	19	0
20	QPSK	50	0	18.66	18.81	18.73		
20	QPSK	50	24	18.65	18.75	18.68		
20	QPSK	50	49	18.60	18.70	18.66		
20	QPSK	100	0	18.56	18.65	18.62	19	0
20	16QAM	1	0	18.76	18.88	18.84		
20	16QAM	1	49	18.64	18.85	18.68		
20	16QAM	1	99	18.61	18.73	18.64		
20	16QAM	50	0	18.58	18.70	18.62	19	0
20	16QAM	50	24	18.50	18.65	18.59		
20	16QAM	50	49	18.44	18.64	18.57		
20	16QAM	100	0	18.36	18.53	18.50		
Channel				18675	18900	19125	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	18.81	18.82	18.84		
15	QPSK	1	37	18.80	18.80	18.83	19	0
15	QPSK	1	74	18.76	18.72	18.70	19	0
15	QPSK	36	0	18.71	18.67	18.64		
15	QPSK	36	18	18.69	18.69	18.61		
15	QPSK	36	37	18.64	18.62	18.59		
15	QPSK	75	0	18.53	18.59	18.55	19	0
15	16QAM	1	0	18.73	18.79	18.80		
15	16QAM	1	37	18.70	18.68	18.75		
15	16QAM	1	74	18.61	18.62	18.73		
15	16QAM	36	0	18.53	18.67	18.70	19	0
15	16QAM	36	18	18.50	18.57	18.62		
15	16QAM	36	37	18.45	18.49	18.49		
15	16QAM	75	0	18.43	18.47	18.43		
Channel				18650	18900	19150	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	18.75	18.79	18.80		
10	QPSK	1	24	18.73	18.72	18.76	19	0
10	QPSK	1	49	18.70	18.69	18.72	19	0
10	QPSK	25	0	18.49	18.61	18.65		
10	QPSK	25	12	18.39	18.56	18.60		
10	QPSK	25	24	18.35	18.54	18.59		
10	QPSK	50	0	18.33	18.50	18.49	19	0
10	16QAM	1	0	18.73	18.77	18.72		
10	16QAM	1	24	18.67	18.64	18.70		
10	16QAM	1	49	18.64	18.61	18.64		
10	16QAM	25	0	18.63	18.60	18.62	19	0
10	16QAM	25	12	18.52	18.57	18.51		
10	16QAM	25	24	18.50	18.47	18.46		
10	16QAM	50	0	18.41	18.40	18.41		



FCC SAR Test Report

Report No. : FA3N1535

Channel				18625	18900	19175	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	18.68	18.79	18.78	19	0
5	QPSK	1	12	18.65	18.75	18.68		
5	QPSK	1	24	18.59	18.72	18.64		
5	QPSK	12	0	18.57	18.65	18.56	19	0
5	QPSK	12	6	18.56	18.61	18.54		
5	QPSK	12	11	18.46	18.58	18.45		
5	QPSK	25	0	18.41	18.55	18.38	19	0
5	16QAM	1	0	18.58	18.71	18.71		
5	16QAM	1	12	18.48	18.63	18.67		
5	16QAM	1	24	18.45	18.58	18.62	19	0
5	16QAM	12	0	18.44	18.57	18.58		
5	16QAM	12	6	18.31	18.50	18.46		
5	16QAM	12	11	18.29	18.41	18.39	19	0
5	16QAM	25	0	18.25	18.35	18.31		
Channel				18615	18900	19185	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	18.61	18.67	18.74	19	0
3	QPSK	1	7	18.56	18.63	18.73		
3	QPSK	1	14	18.54	18.60	18.70		
3	QPSK	8	0	18.50	18.62	18.63	19	0
3	QPSK	8	4	18.44	18.56	18.59		
3	QPSK	8	7	18.40	18.52	18.54		
3	QPSK	15	0	18.31	18.49	18.43	19	0
3	16QAM	1	0	18.58	18.61	18.71		
3	16QAM	1	7	18.50	18.55	18.64		
3	16QAM	1	14	18.45	18.47	18.60	19	0
3	16QAM	8	0	18.48	18.43	18.58		
3	16QAM	8	4	18.43	18.41	18.51		
3	16QAM	8	7	18.39	18.37	18.39	19	0
3	16QAM	15	0	18.26	18.30	18.31		
Channel				18607	18900	19193	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	18.64	18.74	18.77	19	0
1.4	QPSK	1	2	18.61	18.69	18.75		
1.4	QPSK	1	5	18.62	18.64	18.74		
1.4	QPSK	3	0	18.59	18.59	18.73	19	0
1.4	QPSK	3	1	18.53	18.51	18.62		
1.4	QPSK	3	2	18.40	18.48	18.55		
1.4	QPSK	6	0	18.33	18.46	18.43	19	0
1.4	16QAM	1	0	18.54	18.62	18.68		
1.4	16QAM	1	2	18.53	18.61	18.66		
1.4	16QAM	1	5	18.49	18.56	18.60	19	0
1.4	16QAM	3	0	18.43	18.52	18.55		
1.4	16QAM	3	1	18.34	18.42	18.49		
1.4	16QAM	3	2	18.29	18.49	18.38	19	0
1.4	16QAM	6	0	18.23	18.47	18.33		

<LTE Band 7 Conducted Power>
Hotspot inactive - full power mode

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	Target MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.99	23.85	23.54	24	0
20	QPSK	1	49	23.98	23.67	23.56		
20	QPSK	1	99	23.98	23.58	23.77		
20	QPSK	50	0	22.98	22.83	22.53	23	1
20	QPSK	50	24	22.93	22.73	22.52		
20	QPSK	50	49	22.96	22.68	22.59		
20	QPSK	100	0	22.90	22.69	22.48	23	1
20	16QAM	1	0	22.95	22.75	22.49		
20	16QAM	1	49	22.90	22.70	22.41		
20	16QAM	1	99	22.91	22.47	22.79	22	2
20	16QAM	50	0	21.93	21.83	21.51		
20	16QAM	50	24	21.98	21.76	21.53		
20	16QAM	50	49	21.95	21.74	21.71	22	2
20	16QAM	100	0	21.97	21.71	21.54		
Channel				20825	21100	21375	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.96	23.84	23.57	24	0
15	QPSK	1	37	23.90	23.67	23.50		
15	QPSK	1	74	23.98	23.68	23.78		
15	QPSK	36	0	22.88	22.90	22.52	23	1
15	QPSK	36	18	22.89	22.78	22.58		
15	QPSK	36	37	23.00	22.64	22.72		
15	QPSK	75	0	22.82	22.74	22.58	23	1
15	16QAM	1	0	22.85	22.86	22.43		
15	16QAM	1	37	22.81	22.63	22.47		
15	16QAM	1	74	22.94	22.57	22.70	22	2
15	16QAM	36	0	21.92	21.83	21.47		
15	16QAM	36	18	21.83	21.77	21.59		
15	16QAM	36	37	21.94	21.66	21.75	22	2
15	16QAM	75	0	21.99	21.75	21.56		
Channel				20800	21100	21400	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.96	23.76	23.55	24	0
10	QPSK	1	24	23.91	23.74	23.68		
10	QPSK	1	49	23.94	23.60	23.83		
10	QPSK	25	0	22.90	22.65	22.51	23	1
10	QPSK	25	12	22.92	22.66	22.68		
10	QPSK	25	24	22.85	22.67	22.74		
10	QPSK	50	0	22.90	22.71	22.57	23	1
10	16QAM	1	0	22.84	22.74	22.44		
10	16QAM	1	24	22.82	22.59	22.54		
10	16QAM	1	49	22.91	22.63	22.80	22	2
10	16QAM	25	0	21.78	21.74	21.53		
10	16QAM	25	12	21.89	21.77	21.68		
10	16QAM	25	24	21.86	21.74	21.75	22	2
10	16QAM	50	0	21.82	21.82	21.55		



Channel				20775	21100	21425	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	23.98	23.77	23.68	24	0
5	QPSK	1	12	23.85	23.66	23.66		
5	QPSK	1	24	23.92	23.64	23.68		
5	QPSK	12	0	22.94	22.75	22.64	23	1
5	QPSK	12	6	22.82	22.73	22.64		
5	QPSK	12	11	22.94	22.73	22.74		
5	QPSK	25	0	22.89	22.70	22.70	23	1
5	16QAM	1	0	22.86	22.69	22.56		
5	16QAM	1	12	22.73	22.63	22.59		
5	16QAM	1	24	22.78	22.60	22.72	22	2
5	16QAM	12	0	21.99	21.80	21.63		
5	16QAM	12	6	21.91	21.79	21.65		
5	16QAM	12	11	21.88	21.78	21.75	22	2
5	16QAM	25	0	21.88	21.77	21.67		



<LTE Band 7 Conducted Power>

<Hotspot active - reduced power mode>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune up Limit (dBm)	Target MPR (dB)
Channel				20850	21100	21350	21.5	0
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	20.65	20.48	20.20		
20	QPSK	1	49	20.52	20.37	20.02	21.5	0
20	QPSK	1	99	20.62	20.20	20.35		
20	QPSK	50	0	20.56	20.42	20.20		
20	QPSK	50	24	20.50	20.38	20.06	21.5	0
20	QPSK	50	49	20.49	20.35	20.20		
20	QPSK	100	0	20.54	20.33	20.06		
20	16QAM	1	0	20.42	20.44	19.96	21.5	0
20	16QAM	1	49	20.43	20.31	19.99		
20	16QAM	1	99	20.57	20.14	20.24		
20	16QAM	50	0	20.53	20.44	20.05	21.5	0
20	16QAM	50	24	20.55	20.28	20.08		
20	16QAM	50	49	20.49	20.32	20.21		
20	16QAM	100	0	20.56	20.33	20.11	21.5	0
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	20.46	20.53	20.07	21.5	0
15	QPSK	1	37	20.49	20.41	20.06		
15	QPSK	1	74	20.60	20.28	20.32		
15	QPSK	36	0	20.39	20.53	20.03	21.5	0
15	QPSK	36	18	20.43	20.37	20.10		
15	QPSK	36	37	20.61	20.30	20.29		
15	QPSK	75	0	20.48	20.37	20.16	21.5	0
15	16QAM	1	0	20.41	20.51	20.04		
15	16QAM	1	37	20.37	20.31	20.03		
15	16QAM	1	74	20.51	20.19	20.25	21.5	0
15	16QAM	36	0	20.51	20.42	20.06		
15	16QAM	36	18	20.40	20.37	20.11		
15	16QAM	36	37	20.53	20.28	20.26	21.5	0
15	16QAM	75	0	20.44	20.36	20.21		
Channel				20800	21100	21400		
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	20.44	20.36	20.06	21.5	0
10	QPSK	1	24	20.42	20.35	20.21		
10	QPSK	1	49	20.46	20.23	20.33		
10	QPSK	25	0	20.42	20.37	20.05	21.5	0
10	QPSK	25	12	20.45	20.35	20.29		
10	QPSK	25	24	20.41	20.35	20.26		
10	QPSK	50	0	20.49	20.34	20.22	21.5	0
10	16QAM	1	0	20.39	20.38	20.08		
10	16QAM	1	24	20.32	20.24	20.14		
10	16QAM	1	49	20.50	20.20	20.21	21.5	0
10	16QAM	25	0	20.39	20.39	20.10		
10	16QAM	25	12	20.50	20.34	20.36		
10	16QAM	25	24	20.36	20.37	20.28	21.5	0
10	16QAM	50	0	20.46	20.37	20.17		



Channel				20775	21100	21425	Tune up Limit (dBm)	Target MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	20.46	20.45	20.28	21.5	0
5	QPSK	1	12	20.38	20.35	20.25		
5	QPSK	1	24	20.43	20.34	20.36		
5	QPSK	12	0	20.49	20.35	20.30	21.5	0
5	QPSK	12	6	20.39	20.36	20.31		
5	QPSK	12	11	20.44	20.33	20.32		
5	QPSK	25	0	20.44	20.36	20.32	21.5	0
5	16QAM	1	0	20.34	20.34	20.21		
5	16QAM	1	12	20.25	20.25	20.10		
5	16QAM	1	24	20.33	20.24	20.19	21.5	0
5	16QAM	12	0	20.49	20.42	20.39		
5	16QAM	12	6	20.43	20.41	20.33		
5	16QAM	12	11	20.47	20.40	20.35		
5	16QAM	25	0	20.43	20.42	20.30		

<WLAN 2.4GHz Conducted Power>

WLAN 2.4GHz 802.11b Average Power (dBm)						Tune up Limit (dBm)
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate	2Mbps	5.5Mbps	11Mbps	
		1Mbps				
CH 1	2412	16.62	16.72	16.70	16.68	17.0
CH 6	2437	16.74				
CH 11	2462	16.51				

WLAN 2.4GHz 802.11g Average Power (dBm)										Tune up Limit (dBm)
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
		6Mbps								
CH 1	2412	14.77	14.87	14.87	14.86	14.84	14.72	14.61	14.60	15.0
CH 6	2437	14.92								
CH 11	2462	14.60								

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)										Tune up Limit (dBm)
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	
		MCS0								
CH 1	2412	13.58	13.89	13.88	13.80	13.70	13.67	13.62	13.57	14.0
CH 6	2437	13.67								
CH 11	2462	13.90								

Note:

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
3. Apply the test exclusion rule in KDB 248227 D01 v01r02 11g, 11n-HT20 output power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded.



<WLAN 5GHz Conducted Power>

WLAN 5GHz 802.11a Average Power (dBm)										Tune up Limit (dBm)
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate 6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
CH 36	5180	13.90	13.88	13.87	13.85	13.84	13.65	13.63	13.61	14.0
CH 40	5200	13.70								
CH 44	5220	13.76								
CH 48	5240	13.86								
CH 52	5260	13.88	13.96	13.94	13.97	13.73	13.70	13.68	13.67	
CH 56	5280	13.79								
CH 60	5300	13.98								
CH 64	5320	13.86								
CH 100	5500	13.64	13.84	13.83	13.82	13.80	13.79	13.56	13.54	
CH 104	5520	13.60								
CH 108	5540	13.58								
CH 112	5560	13.52								
CH 116	5580	13.67								
CH 132	5660	13.75								
CH 136	5680	13.64								
CH 140	5700	13.86								
CH 149	5745	13.95	13.92	13.88	13.93	13.76	13.80	13.74	13.70	
CH 153	5765	13.74								
CH 157	5785	13.76								
CH 161	5805	13.72								
CH 165	5825	13.82								



WLAN 5GHz 802.11n-HT20 Average Power (dBm)										Tune up Limit (dBm)
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	
		MCS0								
CH 36	5180	13.93	13.91	13.90	13.88	13.70	13.67	13.65	13.62	14.0
CH 40	5200	13.59								
CH 44	5220	13.70								
CH 48	5240	13.80								
CH 52	5260	13.85	13.82	13.80	13.78	13.67	13.66	13.78	13.77	
CH 56	5280	13.94								
CH 60	5300	13.96								
CH 64	5320	13.76								
CH 100	5500	13.66	13.87	13.86	13.85	13.72	13.73	13.76	13.76	
CH 104	5520	13.55								
CH 108	5540	13.52								
CH 112	5560	13.66								
CH 116	5580	13.78								
CH 132	5660	13.78								
CH 136	5680	13.58								
CH 140	5700	13.88								
CH 149	5745	13.62	13.96	13.96	13.91	13.76	13.72	13.70	13.69	
CH 153	5765	13.71								
CH 157	5785	13.98								
CH 161	5805	13.77								
CH 165	5825	13.88								


WLAN 5GHz 802.11n-HT40 Average Power (dBm)										Tune up Limit (dBm)
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	
		MCS0								
CH 38	5190	13.80	13.66	13.67	13.69	13.67	13.66	13.62	13.70	14.0
CH 46	5230	13.71								
CH 54	5270	13.87	13.45	13.44	13.40	13.48	13.43	13.54	13.50	
CH 62	5310	10.73								
CH 102	5510	10.12	13.98	13.67	13.64	13.69	13.68	13.67	13.63	
CH 110	5550	13.84								
CH 134	5670	13.99								
CH 151	5755	13.63	13.74	13.59	13.43	13.62	13.52	13.67	13.63	
CH 159	5795	13.82								

Note:

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate.
3. Apply the test exclusion rule in KDB 248227 D01 v01r02, 11n-HT20 / HT40 output power is less than 1/4dB higher than 802.11a mode, thus the SAR can be excluded.

12. Antenna Location

<Smart Phone>

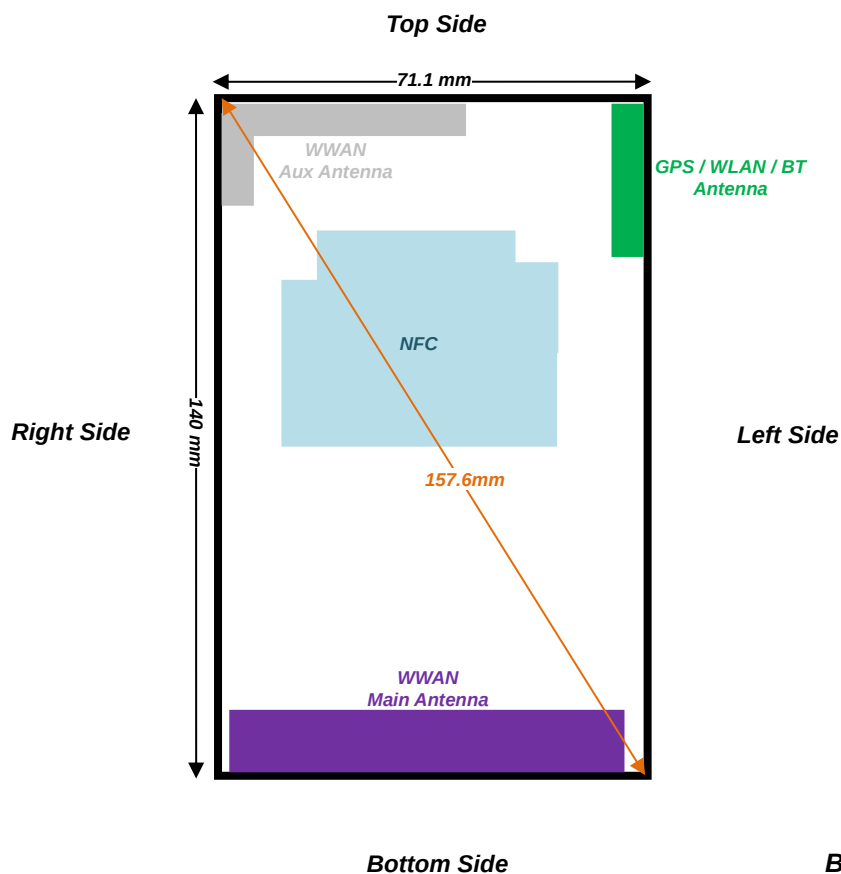

Back View

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	120.5mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	104.9mm	58.9mm	≤ 25mm
Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	No	Yes

Note:

- Per KDB 941225 D06 v01r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

13. SAR Test Results

Note:

1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Considering the possibility of e.g. 3rd part VoIP operation, LTE SAR for the head exposure positions and body-worn positions are performed and was additional EGPRS SAR testing performed on voice mode worse case.
4. For GSM1900 DTM of head exposure positions and body worn exposure positions, the tune-up scaling factor was used source-based time-average power and tune-up limit calculation.
5. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA /HSUPA / DC-HSDPA output power is < 0.25 dB higher than RMC12.2kbps, or reported SAR with RMC 12.2kbps setting is ≤ 1.2 W/kg, HSDPA /HSUPA /DC-HSDPA SAR evaluation can be excluded.
6. Per KDB 941225 D05v02r03, when reported SAR of 1RB and 50%RB allocation for QPSK ≤ 0.8 W/kg, and 100%RB with QPSK output power is less than 1RB and 50%RB, 100%RB allocation for QPSK is not required.
7. Per KDB 941225 D05v02r03, when reported SAR of 1RB and 50%RB allocation for QPSK > 0.8 W/kg for any exposure position, SAR testing of 100%RB allocation for QPSK is performed at the highest power channel.
8. 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
9. Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.
10. Per KDB 648474 D04v01r02, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is > 1.2 W/kg, SAR testing with a headset connected to the handset is required.
11. Additional WLAN SAR with headset testing was performed for simultaneous transmission analysis.
12. This device 2.4GHz WLAN supports Hotspot operation, and 2.4GHz / 5.8GHz WLAN supports WiFi Direct (Group Client / Group Owner), and 5.2GHz / 5.3GHz / 5.5GHz supports WiFi Direct (Group Client only).
13. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900 band, UMTS band 2 and 4, LTE band 2 / 4 and 7.

**13.1 Head SAR****<GSM SAR>**

Plot No.	Band	Mode	Modulation	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GSM Voice	GMSK	Right Cheek	128	824.2	33.46	33.50	1.009	-0.033	0.415	0.419	0.313	0.316
	GSM850	GSM Voice	GMSK	Right Cheek	189	836.4	33.43	33.50	1.016	0.03	0.441	0.448	0.338	0.343
01	GSM850	GSM Voice	GMSK	Right Cheek	251	848.8	33.37	33.50	1.030	0.043	0.481	0.496	0.368	0.379
	GSM850	GPRS (4 Tx slots)	GMSK	Right Cheek	251	848.8	27.49	27.50	1.002	0	0.399	0.400	0.309	0.310
	GSM850	GSM Voice	GMSK	Right Tilted	128	824.2	33.46	33.50	1.009	0.034	0.269	0.271	0.209	0.211
	GSM850	GSM Voice	GMSK	Left Cheek	128	824.2	33.46	33.50	1.009	-0.007	0.372	0.375	0.289	0.292
	GSM850	GSM Voice	GMSK	Left Tilted	128	824.2	33.46	33.50	1.009	0.033	0.215	0.217	0.171	0.173
	GSM1900	DTM Multi-slot class 11	GSM Voice with 8PSK 2Tx	Right Cheek	810	1909.8	21.40	21.65	1.060	-0.08	0.151	0.160	0.096	0.102
	GSM1900	DTM Multi-slot class 11	GSM Voice with 8PSK 2Tx	Right Tilted	810	1909.8	21.40	21.65	1.060	-0.18	0.069	0.073	0.041	0.043
02	GSM1900	DTM Multi-slot class 11	GSM Voice with 8PSK 2Tx	Left Cheek	810	1909.8	21.40	21.65	1.060	0	0.260	0.276	0.155	0.164
	GSM1900	DTM Multi-slot class 11	GSM Voice with 8PSK 2Tx	Left Cheek	512	1850.2	21.03	21.65	1.153	0.01	0.221	0.255	0.135	0.156
	GSM1900	DTM Multi-slot class 11	GSM Voice with 8PSK 2Tx	Left Cheek	661	1880	21.64	21.65	1.002	-0.13	0.224	0.225	0.134	0.134
	GSM1900	EGPRS (4 Tx slot)	8PSK	Left Cheek	810	1909.8	25.64	25.90	1.062	0.06	0.241	0.256	0.149	0.158
	GSM1900	DTM Multi-slot class 11	GSM Voice with 8PSK 2Tx	Left Tilted	810	1909.8	21.40	21.65	1.060	-0.1	0.039	0.041	0.023	0.024

<WCDMA SAR>

Plot No.	Band	Mode	Modulation	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	QPSK	Right Cheek	4132	826.4	23.96	24.00	1.009	0.037	0.538	0.543	0.412	0.416
	WCDMA V	RMC 12.2Kbps	QPSK	Right Cheek	4182	836.4	23.84	24.00	1.038	0.054	0.588	0.610	0.446	0.463
03	WCDMA V	RMC 12.2Kbps	QPSK	Right Cheek	4233	846.6	23.93	24.00	1.016	0.171	0.637	0.647	0.482	0.490
	WCDMA V	RMC 12.2Kbps	QPSK	Right Tilted	4132	826.4	23.96	24.00	1.009	-0.084	0.229	0.231	0.167	0.169
	WCDMA V	RMC 12.2Kbps	QPSK	Left Cheek	4132	826.4	23.96	24.00	1.009	0.014	0.471	0.475	0.365	0.368
	WCDMA V	RMC 12.2Kbps	QPSK	Left Tilted	4132	826.4	23.96	24.00	1.009	0.092	0.297	0.300	0.232	0.234
	WCDMA IV	RMC 12.2Kbps	QPSK	Right Cheek	1413	1732.6	23.75	24.00	1.059	0.03	0.311	0.329	0.199	0.211
	WCDMA IV	RMC 12.2Kbps	QPSK	Right Tilted	1413	1732.6	23.75	24.00	1.059	0.02	0.141	0.149	0.085	0.090
	WCDMA IV	RMC 12.2Kbps	QPSK	Left Cheek	1413	1732.6	23.75	24.00	1.059	0.09	0.409	0.433	0.256	0.271
	WCDMA IV	RMC 12.2Kbps	QPSK	Left Cheek	1312	1712.4	23.61	24.00	1.094	-0.06	0.378	0.414	0.237	0.259
04	WCDMA IV	RMC 12.2Kbps	QPSK	Left Cheek	1513	1752.6	23.69	24.00	1.074	-0.03	0.415	0.446	0.256	0.275
	WCDMA IV	RMC 12.2Kbps	QPSK	Left Tilted	1413	1732.6	23.75	24.00	1.059	-0.02	0.219	0.232	0.131	0.139
	WCDMA II	RMC 12.2Kbps	QPSK	Right Cheek	9262	1852.4	23.92	24.00	1.019	-0.07	0.242	0.246	0.158	0.161
	WCDMA II	RMC 12.2Kbps	QPSK	Right Tilted	9262	1852.4	23.92	24.00	1.019	-0.13	0.103	0.105	0.065	0.066
05	WCDMA II	RMC 12.2Kbps	QPSK	Left Cheek	9262	1852.4	23.92	24.00	1.019	0	0.566	0.577	0.344	0.350
	WCDMA II	RMC 12.2Kbps	QPSK	Left Cheek	9400	1880	23.78	24.00	1.052	0.05	0.506	0.532	0.304	0.320
	WCDMA II	RMC 12.2Kbps	QPSK	Left Cheek	9538	1907.6	23.66	24.00	1.081	0.04	0.445	0.481	0.266	0.288
	WCDMA II	RMC 12.2Kbps	QPSK	Left Tilted	9262	1852.4	23.92	24.00	1.019	0.12	0.061	0.062	0.034	0.035



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 17	10M	QPSK	1	49	Right Cheek	23790	710	23.60	24.00	1.096	0	0.148	0.162	0.117	0.128
	LTE Band 17	10M	QPSK	1	49	Right Cheek	23780	709	23.56	24.00	1.107	0.07	0.145	0.160	0.115	0.127
06	LTE Band 17	10M	QPSK	1	49	Right Cheek	23800	711	23.59	24.00	1.099	-0.01	0.150	0.165	0.119	0.131
	LTE Band 17	10M	QPSK	25	0	Right Cheek	23780	709	22.55	23.00	1.109	0.02	0.101	0.112	0.081	0.090
	LTE Band 17	10M	QPSK	1	49	Right Tilted	23790	710	23.60	24.00	1.096	0.02	0.089	0.098	0.072	0.079
	LTE Band 17	10M	QPSK	25	0	Right Tilted	23780	709	22.55	23.00	1.109	-0.15	0.068	0.075	0.054	0.060
	LTE Band 17	10M	QPSK	1	49	Left Cheek	23790	710	23.60	24.00	1.096	0.14	0.135	0.148	0.107	0.117
	LTE Band 17	10M	QPSK	25	0	Left Cheek	23780	709	22.55	23.00	1.109	0.19	0.100	0.111	0.080	0.089
	LTE Band 17	10M	QPSK	1	49	Left Tilted	23790	710	23.60	24.00	1.096	0.14	0.087	0.095	0.070	0.077
	LTE Band 17	10M	QPSK	25	0	Left Tilted	23780	709	22.55	23.00	1.109	0.12	0.062	0.069	0.051	0.057
	LTE Band 4	20M	QPSK	1	0	Right Cheek	20175	1732.5	23.86	24.00	1.033	-0.06	0.331	0.342	0.209	0.216
	LTE Band 4	20M	QPSK	1	0	Left Cheek	20050	1720	23.66	24.00	1.081	0.12	0.422	0.456	0.261	0.282
07	LTE Band 4	20M	QPSK	1	0	Left Cheek	20300	1745	23.69	24.00	1.074	0.13	0.484	0.520	0.292	0.314
	LTE Band 4	20M	QPSK	50	0	Right Cheek	20300	1745	22.75	23.00	1.059	-0.07	0.246	0.261	0.153	0.162
	LTE Band 4	20M	QPSK	1	0	Right Tilted	20175	1732.5	23.86	24.00	1.033	0.19	0.093	0.096	0.053	0.055
	LTE Band 4	20M	QPSK	50	0	Right Tilted	20300	1745	22.75	23.00	1.059	0.18	0.068	0.072	0.037	0.039
	LTE Band 4	20M	QPSK	1	0	Left Cheek	20175	1732.5	23.86	24.00	1.033	0.1	0.444	0.459	0.275	0.284
	LTE Band 4	20M	QPSK	50	0	Left Cheek	20300	1745	22.75	23.00	1.059	0.14	0.395	0.418	0.237	0.251
	LTE Band 4	20M	QPSK	1	0	Left Tilted	20175	1732.5	23.86	24.00	1.033	0.14	0.163	0.168	0.098	0.101
	LTE Band 4	20M	QPSK	50	0	Left Tilted	20300	1745	22.75	23.00	1.059	-0.01	0.112	0.119	0.070	0.074
	LTE Band 2	20M	QPSK	1	0	Right Cheek	18700	1860	22.30	22.50	1.047	-0.13	0.170	0.178	0.116	0.121
	LTE Band 2	20M	QPSK	50	0	Right Cheek	18700	1860	21.31	21.50	1.045	0.02	0.144	0.150	0.098	0.102
	LTE Band 2	20M	QPSK	1	0	Right Tilted	18700	1860	22.30	22.50	1.047	0.16	0.045	0.047	0.029	0.030
	LTE Band 2	20M	QPSK	50	0	Right Tilted	18700	1860	21.31	21.50	1.045	0.15	0.044	0.046	0.029	0.030
	LTE Band 2	20M	QPSK	1	0	Left Cheek	18700	1860	22.30	22.50	1.047	-0.07	0.359	0.376	0.225	0.236
	LTE Band 2	20M	QPSK	1	0	Left Cheek	18900	1880	22.00	22.50	1.122	0.01	0.353	0.396	0.217	0.243
08	LTE Band 2	20M	QPSK	1	0	Left Cheek	19100	1900	21.85	22.50	1.161	-0.05	0.352	0.409	0.215	0.250
	LTE Band 2	20M	QPSK	50	0	Left Cheek	18700	1860	21.31	21.50	1.045	0	0.299	0.312	0.187	0.195
	LTE Band 2	20M	QPSK	1	0	Left Tilted	18700	1860	22.30	22.50	1.047	0.16	0.052	0.054	0.034	0.036
	LTE Band 2	20M	QPSK	50	0	Left Tilted	18700	1860	21.31	21.50	1.045	0.17	0.044	0.046	0.030	0.031
	LTE Band 7	20M	QPSK	1	0	Right Cheek	20850	2510	23.99	24.00	1.002	-0.04	0.433	0.434	0.231	0.232
09	LTE Band 7	20M	QPSK	1	0	Left Cheek	21100	2535	23.85	24.00	1.035	0.08	0.561	0.581	0.290	0.300
	LTE Band 7	20M	QPSK	1	0	Left Cheek	21350	2560	23.54	24.00	1.112	0.04	0.491	0.546	0.255	0.283
	LTE Band 7	20M	QPSK	50	0	Right Cheek	20850	2510	22.98	23.00	1.005	0.01	0.343	0.345	0.183	0.184
	LTE Band 7	20M	QPSK	1	0	Right Tilted	20850	2510	23.99	24.00	1.002	0.18	0.226	0.227	0.112	0.112
	LTE Band 7	20M	QPSK	50	0	Right Tilted	20850	2510	22.98	23.00	1.005	-0.16	0.181	0.182	0.087	0.087
	LTE Band 7	20M	QPSK	1	0	Left Cheek	20850	2510	23.99	24.00	1.002	-0.03	0.493	0.494	0.258	0.259
	LTE Band 7	20M	QPSK	50	0	Left Cheek	20850	2510	22.98	23.00	1.005	0.08	0.396	0.398	0.207	0.208
	LTE Band 7	20M	QPSK	1	0	Left Tilted	20850	2510	23.99	24.00	1.002	0.09	0.140	0.140	0.070	0.070
	LTE Band 7	20M	QPSK	50	0	Left Tilted	20850	2510	22.98	23.00	1.005	0.17	0.116	0.117	0.056	0.056

**<WLAN SAR DTS>**

Plot No.	Band	Mode	Modulation	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Right Cheek	6	2437	16.74	17.00	1.061	97.63	1.024	0.035	0.725	0.787	0.337	0.366
	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Right Cheek	1	2412	16.62	17.00	1.090	97.63	1.024	-0.08	0.553	0.617	0.256	0.286
10	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Right Cheek	11	2462	16.51	17.00	1.118	97.63	1.024	-0.1	0.730	0.836	0.342	0.392
	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Right Tilted	6	2437	16.74	17.00	1.061	97.63	1.024	-0.04	0.521	0.566	0.246	0.267
	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Left Cheek	6	2437	16.74	17.00	1.061	97.63	1.024	0.01	0.263	0.286	0.131	0.142
	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Left Tilted	6	2437	16.74	17.00	1.061	97.63	1.024	0.02	0.224	0.243	0.114	0.124
	WLAN5GHz	802.11a 6Mbps	OFDM	Right Cheek	149	5745	13.95	14.00	1.012	87.26	1.146	0.13	0.185	0.214	0.074	0.086
	WLAN5GHz	802.11a 6Mbps	OFDM	Right Tilted	149	5745	13.95	14.00	1.012	87.26	1.146	0.16	0.192	0.223	0.077	0.089
	WLAN5GHz	802.11a 6Mbps	OFDM	Right Tilted	157	5785	13.76	14.00	1.057	87.26	1.146	0.17	0.204	0.247	0.081	0.098
11	WLAN5GHz	802.11a 6Mbps	OFDM	Right Tilted	165	5825	13.82	14.00	1.042	87.26	1.146	0.12	0.211	0.252	0.085	0.102
	WLAN5GHz	802.11a 6Mbps	OFDM	Left Cheek	149	5745	13.95	14.00	1.012	87.26	1.146	0.13	0.118	0.137	0.053	0.061
	WLAN5GHz	802.11a 6Mbps	OFDM	Left Tilted	149	5745	13.95	14.00	1.012	87.26	1.146	0.13	0.107	0.124	0.050	0.058

<WLAN SAR NII>

Plot No.	Band	Mode	Modulation	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	OFDM	Right Cheek	36	5180	13.90	14.00	1.023	87.26	1.146	0.16	0.088	0.103	0.030	0.035
12	WLAN5GHz	802.11a 6Mbps	OFDM	Right Tilted	36	5180	13.90	14.00	1.023	87.26	1.146	0.11	0.116	0.136	0.032	0.038
	WLAN5GHz	802.11a 6Mbps	OFDM	Right Tilted	48	5240	13.86	14.00	1.033	87.26	1.146	0.06	0.113	0.134	0.028	0.033
	WLAN5GHz	802.11a 6Mbps	OFDM	Left Cheek	36	5180	13.90	14.00	1.023	87.26	1.146	-0.03	0.035	0.041	0.011	0.013
	WLAN5GHz	802.11a 6Mbps	OFDM	Left Tilted	36	5180	13.90	14.00	1.023	87.26	1.146	-0.15	0.044	0.052	0.014	0.016
	WLAN5GHz	802.11a 6Mbps	OFDM	Right Cheek	60	5300	13.98	14.00	1.005	87.26	1.146	0.09	0.114	0.131	0.033	0.038
13	WLAN5GHz	802.11a 6Mbps	OFDM	Right Cheek	52	5260	13.88	14.00	1.028	87.26	1.146	-0.08	0.149	0.176	0.039	0.046
	WLAN5GHz	802.11a 6Mbps	OFDM	Right Tilted	60	5300	13.98	14.00	1.005	87.26	1.146	0.01	0.076	0.087	0.023	0.026
	WLAN5GHz	802.11a 6Mbps	OFDM	Left Cheek	60	5300	13.98	14.00	1.005	87.26	1.146	-0.05	0.033	0.038	0.009	0.010
	WLAN5GHz	802.11a 6Mbps	OFDM	Left Tilted	60	5300	13.98	14.00	1.005	87.26	1.146	-0.19	0.030	0.035	0.010	0.011
	WLAN5GHz	802.11a 6Mbps	OFDM	Right Cheek	140	5700	13.86	14.00	1.033	87.26	1.146	-0.13	0.071	0.084	0.021	0.025
	WLAN5GHz	802.11a 6Mbps	OFDM	Right Cheek	100	5500	13.64	14.00	1.086	87.26	1.146	-0.13	0.068	0.085	0.020	0.025
14	WLAN5GHz	802.11a 6Mbps	OFDM	Right Cheek	116	5580	13.67	14.00	1.079	87.26	1.146	0.1	0.093	0.115	0.048	0.059
	WLAN5GHz	802.11a 6Mbps	OFDM	Right Tilted	140	5700	13.86	14.00	1.033	87.26	1.146	-0.14	0.048	0.057	0.017	0.020
	WLAN5GHz	802.11a 6Mbps	OFDM	Left Cheek	140	5700	13.86	14.00	1.033	87.26	1.146	0.14	0.029	0.034	0.006	0.007
	WLAN5GHz	802.11a 6Mbps	OFDM	Left Tilted	140	5700	13.86	14.00	1.033	87.26	1.146	0.1	0.023	0.027	0.006	0.007

13.2 Hotspot SAR

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	120.5mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	104.9mm	58.9mm	≤ 25mm
Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	No	Yes

Note:

- Per KDB 941225 D06 v01r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

<GSM SAR>

Plot No.	Band	Mode	Modulation	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Hotspot) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
15	GSM850	GPRS (4 Tx slots)	GMSK	Front	1cm	251	848.8	OFF	27.49	27.50	1.002	0.023	0.559	0.560	0.409	0.410
	GSM850	GPRS (4 Tx slots)	GMSK	Front	1cm	128	824.2	OFF	27.44	27.50	1.014	-0.003	0.484	0.491	0.380	0.385
	GSM850	GPRS (4 Tx slots)	GMSK	Front	1cm	189	836.4	OFF	27.46	27.50	1.009	0.024	0.467	0.471	0.366	0.369
	GSM850	GPRS (4 Tx slots)	GMSK	Back	1cm	251	848.8	OFF	27.49	27.50	1.002	-0.02	0.523	0.524	0.405	0.406
	GSM850	GPRS (4 Tx slots)	GMSK	Left Side	1cm	251	848.8	OFF	27.49	27.50	1.002	0.025	0.397	0.398	0.276	0.277
	GSM850	GPRS (4 Tx slots)	GMSK	Right Side	1cm	251	848.8	OFF	27.49	27.50	1.002	-0.037	0.489	0.490	0.340	0.341
	GSM850	GPRS (4 Tx slots)	GMSK	Bottom Side	1cm	251	848.8	OFF	27.49	27.50	1.002	0.016	0.134	0.134	0.076	0.076
	GSM1900	GPRS (1 Tx slot)	GMSK	Front	1cm	810	1909.8	ON	27.44	27.50	1.014	0.16	0.508	0.515	0.269	0.273
	GSM1900	GPRS (1 Tx slot)	GMSK	Back	1cm	810	1909.8	ON	27.44	27.50	1.014	-0.03	0.683	0.693	0.360	0.365
	GSM1900	GPRS (1 Tx slot)	GMSK	Left Side	1cm	810	1909.8	ON	27.44	27.50	1.014	-0.04	0.087	0.088	0.049	0.050
	GSM1900	GPRS (1 Tx slot)	GMSK	Right Side	1cm	810	1909.8	ON	27.44	27.50	1.014	-0.04	0.031	0.031	0.019	0.019
16	GSM1900	GPRS (1 Tx slot)	GMSK	Bottom Side	1cm	810	1909.8	ON	27.44	27.50	1.014	0.13	0.983	0.997	0.505	0.512
	GSM1900	GPRS (1 Tx slot)	GMSK	Bottom Side	1cm	512	1850.2	ON	26.88	27.50	1.153	0.08	0.730	0.842	0.377	0.435
	GSM1900	GPRS (1 Tx slot)	GMSK	Bottom Side	1cm	661	1880	ON	27.19	27.50	1.074	0.09	0.847	0.910	0.435	0.467



<WCDMA SAR>

Plot No.	Band	Mode	Modulation	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Hotspot) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA V	RMC 12.2Kbps	QPSK	Front	1cm	4132	826.4	OFF	23.96	24.00	1.009	-0.013	0.621	0.627	0.488	0.493
	WCDMA V	RMC 12.2Kbps	QPSK	Front	1cm	4182	836.4	OFF	23.84	24.00	1.038	0.018	0.518	0.537	0.407	0.422
17	WCDMA V	RMC 12.2Kbps	QPSK	Front	1cm	4233	846.6	OFF	23.93	24.00	1.016	-0.024	0.682	0.693	0.533	0.542
	WCDMA V	RMC 12.2Kbps	QPSK	Back	1cm	4132	826.4	OFF	23.96	24.00	1.009	-0.028	0.583	0.588	0.456	0.460
	WCDMA V	RMC 12.2Kbps	QPSK	Left Side	1cm	4132	826.4	OFF	23.96	24.00	1.009	0.185	0.499	0.504	0.348	0.351
	WCDMA V	RMC 12.2Kbps	QPSK	Right Side	1cm	4132	826.4	OFF	23.96	24.00	1.009	-0.014	0.357	0.360	0.249	0.251
	WCDMA V	RMC 12.2Kbps	QPSK	Bottom Side	1cm	4132	826.4	OFF	23.96	24.00	1.009	0.109	0.139	0.140	0.078	0.079
	WCDMA IV	RMC 12.2Kbps	QPSK	Front	1cm	1413	1732.6	ON	19.45	20.00	1.135	-0.03	0.787	0.893	0.419	0.476
	WCDMA IV	RMC 12.2Kbps	QPSK	Front	1cm	1312	1712.4	ON	19.43	20.00	1.140	-0.02	0.705	0.804	0.377	0.430
	WCDMA IV	RMC 12.2Kbps	QPSK	Front	1cm	1513	1752.6	ON	19.44	20.00	1.138	0.03	0.855	0.973	0.454	0.516
	WCDMA IV	RMC 12.2Kbps	QPSK	Back	1cm	1413	1732.6	ON	19.45	20.00	1.135	0.03	0.695	0.789	0.391	0.444
	WCDMA IV	RMC 12.2Kbps	QPSK	Left Side	1cm	1413	1732.6	ON	19.45	20.00	1.135	0.03	0.110	0.125	0.066	0.075
	WCDMA IV	RMC 12.2Kbps	QPSK	Right Side	1cm	1413	1732.6	ON	19.45	20.00	1.135	0.01	0.079	0.090	0.047	0.053
	WCDMA IV	RMC 12.2Kbps	QPSK	Bottom Side	1cm	1413	1732.6	ON	19.45	20.00	1.135	0.01	0.822	0.933	0.434	0.493
	WCDMA IV	RMC 12.2Kbps	QPSK	Bottom Side	1cm	1312	1712.4	ON	19.43	20.00	1.140	0.12	0.728	0.830	0.388	0.442
18	WCDMA IV	RMC 12.2Kbps	QPSK	Bottom Side	1cm	1738	1752.6	ON	19.44	20.00	1.138	-0.03	0.929	1.057	0.493	0.561
	WCDMA II	RMC 12.2Kbps	QPSK	Front	1cm	9400	1880	ON	18.94	19.00	1.014	-0.02	0.936	0.949	0.490	0.497
	WCDMA II	RMC 12.2Kbps	QPSK	Front	1cm	9262	1852.4	ON	18.90	19.00	1.023	0.06	0.984	1.007	0.514	0.526
	WCDMA II	RMC 12.2Kbps	QPSK	Front	1cm	9538	1907.6	ON	18.79	19.00	1.050	-0.01	0.940	0.987	0.490	0.514
	WCDMA II	RMC 12.2Kbps	QPSK	Back	1cm	9400	1880	ON	18.94	19.00	1.014	-0.04	0.901	0.914	0.479	0.486
	WCDMA II	RMC 12.2Kbps	QPSK	Back	1cm	9262	1852.4	ON	18.90	19.00	1.023	0.07	0.940	0.962	0.504	0.516
	WCDMA II	RMC 12.2Kbps	QPSK	Back	1cm	9538	1907.6	ON	18.79	19.00	1.050	-0.03	0.933	0.979	0.492	0.516
	WCDMA II	RMC 12.2Kbps	QPSK	Left Side	1cm	9400	1880	ON	18.94	19.00	1.014	-0.1	0.116	0.118	0.067	0.068
	WCDMA II	RMC 12.2Kbps	QPSK	Right Side	1cm	9400	1880	ON	18.94	19.00	1.014	0.05	0.050	0.051	0.032	0.032
	WCDMA II	RMC 12.2Kbps	QPSK	Bottom Side	1cm	9400	1880	ON	18.94	19.00	1.014	0.028	1.250	1.267	0.647	0.656
	WCDMA II	RMC 12.2Kbps	QPSK	Bottom Side	1cm	9262	1852.4	ON	18.90	19.00	1.023	0.01	1.210	1.238	0.630	0.645
19	WCDMA II	RMC 12.2Kbps	QPSK	Bottom Side	1cm	9538	1907.6	ON	18.79	19.00	1.050	0.131	1.300	1.364	0.667	0.700



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Hotspot) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 17	10M	QPSK	1	49	Front	1cm	23790	710	OFF	23.60	24.00	1.096	0.01	0.206	0.226	0.164	0.180
	LTE Band 17	10M	QPSK	25	0	Front	1cm	23780	709	OFF	22.55	23.00	1.109	0.1	0.151	0.167	0.121	0.134
20	LTE Band 17	10M	QPSK	1	49	Back	1cm	23790	710	OFF	23.60	24.00	1.096	0.02	0.240	0.263	0.189	0.207
	LTE Band 17	10M	QPSK	1	49	Back	1cm	23780	709	OFF	23.56	24.00	1.107	0.02	0.234	0.259	0.185	0.205
	LTE Band 17	10M	QPSK	1	49	Back	1cm	23800	711	OFF	23.59	24.00	1.099	0.04	0.236	0.259	0.186	0.204
	LTE Band 17	10M	QPSK	25	0	Back	1cm	23780	709	OFF	22.55	23.00	1.109	0.04	0.178	0.197	0.140	0.155
	LTE Band 17	10M	QPSK	1	49	Left Side	1cm	23790	710	OFF	23.60	24.00	1.096	0.04	0.149	0.163	0.107	0.117
	LTE Band 17	10M	QPSK	25	0	Left Side	1cm	23780	709	OFF	22.55	23.00	1.109	-0.09	0.102	0.113	0.074	0.082
	LTE Band 17	10M	QPSK	1	49	Right Side	1cm	23790	710	OFF	23.60	24.00	1.096	0.01	0.158	0.173	0.114	0.125
	LTE Band 17	10M	QPSK	25	0	Right Side	1cm	23780	709	OFF	22.55	23.00	1.109	0.04	0.111	0.123	0.081	0.090
	LTE Band 17	10M	QPSK	1	49	Bottom Side	1cm	23790	710	OFF	23.60	24.00	1.096	0.02	0.026	0.029	0.015	0.016
	LTE Band 17	10M	QPSK	25	0	Bottom Side	1cm	23780	709	OFF	22.55	23.00	1.109	0.02	0.019	0.021	0.011	0.012
	LTE Band 4	20M	QPSK	1	0	Front	1cm	20175	1732.5	ON	20.81	21.00	1.045	-0.06	0.720	0.752	0.388	0.405
	LTE Band 4	20M	QPSK	50	0	Front	1cm	20300	1745	ON	20.79	21.00	1.050	-0.01	0.706	0.741	0.377	0.396
	LTE Band 4	20M	QPSK	1	0	Back	1cm	20175	1732.5	ON	20.81	21.00	1.045	-0.07	0.715	0.747	0.395	0.413
	LTE Band 4	20M	QPSK	50	0	Back	1cm	20300	1745	ON	20.79	21.00	1.050	-0.01	0.738	0.775	0.399	0.419
	LTE Band 4	20M	QPSK	1	0	Left Side	1cm	20175	1732.5	ON	20.81	21.00	1.045	-0.03	0.104	0.109	0.063	0.066
	LTE Band 4	20M	QPSK	50	0	Left Side	1cm	20300	1745	ON	20.79	21.00	1.050	-0.06	0.101	0.106	0.061	0.064
	LTE Band 4	20M	QPSK	1	0	Right Side	1cm	20175	1732.5	ON	20.81	21.00	1.045	0	0.075	0.078	0.046	0.048
	LTE Band 4	20M	QPSK	50	0	Right Side	1cm	20300	1745	ON	20.79	21.00	1.050	-0.05	0.073	0.077	0.044	0.046
	LTE Band 4	20M	QPSK	1	0	Bottom Side	1cm	20175	1732.5	ON	20.81	21.00	1.045	-0.1	0.821	0.858	0.439	0.459
	LTE Band 4	20M	QPSK	1	0	Bottom Side	1cm	20050	1720	ON	20.67	21.00	1.079	-0.1	0.760	0.820	0.407	0.439
21	LTE Band 4	20M	QPSK	1	0	Bottom Side	1cm	20300	1745	ON	20.67	21.00	1.079	-0.12	0.893	0.963	0.476	0.514
	LTE Band 4	20M	QPSK	50	0	Bottom Side	1cm	20300	1745	ON	20.79	21.00	1.050	-0.05	0.894	0.938	0.472	0.495
	LTE Band 4	20M	QPSK	50	0	Bottom Side	1cm	20050	1720	ON	20.71	21.00	1.069	-0.03	0.743	0.794	0.394	0.421
	LTE Band 4	20M	QPSK	50	0	Bottom Side	1cm	20175	1732.5	ON	20.63	21.00	1.089	0.03	0.800	0.871	0.422	0.460
	LTE Band 4	20M	QPSK	100	0	Bottom Side	1cm	20300	1745	ON	20.77	21.00	1.054	-0.02	0.911	0.961	0.479	0.505



FCC SAR Test Report

Report No. : FA3N1535

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Hotspot) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	1cm	18900	1880	ON	18.95	19.00	1.012	0.01	0.821	0.831	0.446	0.451
	LTE Band 2	20M	QPSK	1	0	Front	1cm	18700	1860	ON	18.85	19.00	1.035	0.02	0.840	0.870	0.450	0.466
	LTE Band 2	20M	QPSK	1	0	Front	1cm	19100	1900	ON	18.91	19.00	1.021	0.03	0.876	0.894	0.469	0.479
	LTE Band 2	20M	QPSK	50	0	Front	1cm	18900	1880	ON	18.81	19.00	1.045	0	0.766	0.800	0.414	0.433
	LTE Band 2	20M	QPSK	50	0	Front	1cm	18700	1860	ON	18.66	19.00	1.081	0.07	0.739	0.799	0.403	0.436
	LTE Band 2	20M	QPSK	50	0	Front	1cm	19100	1900	ON	18.73	19.00	1.064	-0.03	0.736	0.783	0.397	0.422
	LTE Band 2	20M	QPSK	100	0	Front	1cm	18900	1880	ON	18.65	19.00	1.084	-0.03	0.725	0.786	0.394	0.427
	LTE Band 2	20M	QPSK	1	0	Back	1cm	18900	1880	ON	18.95	19.00	1.012	0.03	0.873	0.883	0.474	0.479
	LTE Band 2	20M	QPSK	1	0	Back	1cm	18700	1860	ON	18.85	19.00	1.035	0.01	0.772	0.799	0.422	0.437
	LTE Band 2	20M	QPSK	1	0	Back	1cm	19100	1900	ON	18.91	19.00	1.021	0	0.818	0.835	0.443	0.452
	LTE Band 2	20M	QPSK	50	0	Back	1cm	18900	1880	ON	18.81	19.00	1.045	0.02	0.863	0.902	0.466	0.487
	LTE Band 2	20M	QPSK	50	0	Back	1cm	18700	1860	ON	18.66	19.00	1.081	0.05	0.795	0.860	0.433	0.468
	LTE Band 2	20M	QPSK	50	0	Back	1cm	19100	1900	ON	18.73	19.00	1.064	-0.01	0.918	0.977	0.488	0.519
	LTE Band 2	20M	QPSK	100	0	Back	1cm	18900	1880	ON	18.65	19.00	1.084	0.06	0.945	1.024	0.505	0.547
	LTE Band 2	20M	QPSK	1	0	Left Side	1cm	18900	1880	ON	18.95	19.00	1.012	0.04	0.089	0.090	0.053	0.054
	LTE Band 2	20M	QPSK	50	0	Left Side	1cm	18900	1880	ON	18.81	19.00	1.045	0.04	0.088	0.092	0.053	0.055
	LTE Band 2	20M	QPSK	1	0	Right Side	1cm	18900	1880	ON	18.95	19.00	1.012	0.03	0.036	0.036	0.024	0.024
	LTE Band 2	20M	QPSK	50	0	Right Side	1cm	18900	1880	ON	18.81	19.00	1.045	-0.04	0.036	0.038	0.023	0.024
	LTE Band 2	20M	QPSK	1	0	Bottom Side	1cm	18900	1880	ON	18.95	19.00	1.012	-0.01	1.130	1.143	0.597	0.604
	LTE Band 2	20M	QPSK	1	0	Bottom Side	1cm	18700	1860	ON	18.85	19.00	1.035	0.01	0.994	1.029	0.527	0.546
	LTE Band 2	20M	QPSK	1	0	Bottom Side	1cm	19100	1900	ON	18.91	19.00	1.021	-0.02	1.030	1.052	0.549	0.560
	LTE Band 2	20M	QPSK	50	0	Bottom Side	1cm	18900	1880	ON	18.81	19.00	1.045	0.01	1.120	1.170	0.594	0.621
	LTE Band 2	20M	QPSK	50	0	Bottom Side	1cm	18700	1860	ON	18.66	19.00	1.081	0.03	1.060	1.146	0.557	0.602
22	LTE Band 2	20M	QPSK	50	0	Bottom Side	1cm	19100	1900	ON	18.73	19.00	1.064	-0.03	1.190	1.266	0.622	0.662
	LTE Band 2	20M	QPSK	100	0	Bottom Side	1cm	18900	1880	ON	18.65	19.00	1.084	-0.06	1.050	1.138	0.564	0.611



FCC SAR Test Report

Report No. : FA3N1535

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Hotspot) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Front	1cm	20850	2510	ON	20.65	21.50	1.216	0	0.664	0.808	0.354	0.431
	LTE Band 7	20M	QPSK	1	0	Front	1cm	21100	2535	ON	20.48	21.50	1.265	0.05	0.730	0.923	0.389	0.492
	LTE Band 7	20M	QPSK	1	0	Front	1cm	21350	2560	ON	20.20	21.50	1.349	-0.02	0.667	0.900	0.356	0.480
	LTE Band 7	20M	QPSK	50	0	Front	1cm	20850	2510	ON	20.56	21.50	1.242	0.03	0.686	0.852	0.365	0.453
	LTE Band 7	20M	QPSK	50	0	Front	1cm	21100	2535	ON	20.42	21.50	1.282	0.01	0.748	0.959	0.399	0.512
	LTE Band 7	20M	QPSK	50	0	Front	1cm	21350	2560	ON	20.20	21.50	1.349	-0.02	0.663	0.894	0.351	0.473
	LTE Band 7	20M	QPSK	100	0	Front	1cm	20850	2510	ON	20.54	21.50	1.247	0.01	0.725	0.904	0.380	0.474
	LTE Band 7	20M	QPSK	1	0	Back	1cm	20850	2510	ON	20.65	21.50	1.216	0.06	0.708	0.861	0.361	0.439
	LTE Band 7	20M	QPSK	1	0	Back	1cm	21100	2535	ON	20.48	21.50	1.265	0.02	0.659	0.833	0.332	0.420
	LTE Band 7	20M	QPSK	1	0	Back	1cm	21350	2560	ON	20.20	21.50	1.349	-0.01	0.643	0.867	0.322	0.434
	LTE Band 7	20M	QPSK	50	0	Back	1cm	20850	2510	ON	20.56	21.50	1.242	-0.01	0.663	0.823	0.349	0.433
	LTE Band 7	20M	QPSK	50	0	Back	1cm	21100	2535	ON	20.42	21.50	1.282	-0.1	0.749	0.960	0.379	0.486
	LTE Band 7	20M	QPSK	50	0	Back	1cm	21350	2560	ON	20.20	21.50	1.349	-0.07	0.704	0.950	0.354	0.478
	LTE Band 7	20M	QPSK	100	0	Back	1cm	20850	2510	ON	20.54	21.50	1.247	0	0.724	0.903	0.352	0.439
	LTE Band 7	20M	QPSK	1	0	Left Side	1cm	20850	2510	ON	20.65	21.50	1.216	0	0.201	0.244	0.111	0.135
	LTE Band 7	20M	QPSK	50	0	Left Side	1cm	20850	2510	ON	20.56	21.50	1.242	-0.03	0.208	0.258	0.114	0.142
	LTE Band 7	20M	QPSK	1	0	Right Side	1cm	20850	2510	ON	20.65	21.50	1.216	-0.02	0.105	0.128	0.059	0.072
	LTE Band 7	20M	QPSK	50	0	Right Side	1cm	20850	2510	ON	20.56	21.50	1.242	0	0.103	0.128	0.061	0.076
	LTE Band 7	20M	QPSK	1	0	Bottom Side	1cm	20850	2510	ON	20.65	21.50	1.216	-0.01	0.789	0.960	0.411	0.500
	LTE Band 7	20M	QPSK	1	0	Bottom Side	1cm	21100	2535	ON	20.48	21.50	1.265	-0.01	0.732	0.926	0.383	0.484
	LTE Band 7	20M	QPSK	1	0	Bottom Side	1cm	21350	2560	ON	20.20	21.50	1.349	-0.04	0.574	0.774	0.301	0.406
	LTE Band 7	20M	QPSK	50	0	Bottom Side	1cm	20850	2510	ON	20.56	21.50	1.242	-0.05	0.748	0.929	0.386	0.479
23	LTE Band 7	20M	QPSK	50	0	Bottom Side	1cm	21100	2535	ON	20.42	21.50	1.282	0.01	0.768	0.985	0.402	0.515
	LTE Band 7	20M	QPSK	50	0	Bottom Side	1cm	21350	2560	ON	20.20	21.50	1.349	-0.03	0.675	0.911	0.345	0.465
	LTE Band 7	20M	QPSK	100	0	Bottom Side	1cm	20850	2510	ON	20.54	21.50	1.247	-0.09	0.758	0.946	0.388	0.484

<WLAN SAR DTS>

Plot No.	Band	Mode	Modulation	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Front	1cm	6	2437	16.74	17.00	1.061	97.63	1.024	-0.01	0.140	0.152	0.078	0.085
	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Back	1cm	6	2437	16.74	17.00	1.061	97.63	1.024	-0.05	0.153	0.166	0.081	0.088
	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Back	1cm	1	2412	16.62	17.00	1.090	97.63	1.024	-0.11	0.151	0.169	0.075	0.084
24	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Back	1cm	11	2462	16.51	17.00	1.118	97.63	1.024	-0.17	0.170	0.195	0.079	0.090
	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Left Side	1cm	6	2437	16.74	17.00	1.061	97.63	1.024	0.04	0.109	0.118	0.052	0.056
	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Top Side	1cm	6	2437	16.74	17.00	1.061	97.63	1.024	-0.01	0.141	0.153	0.074	0.080
	WLAN5GHz	802.11a 6Mbps	OFDM	Front	1cm	149	5745	13.95	14.00	1.012	87.26	1.146	-0.18	0.023	0.027	0.007	0.009
	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1cm	149	5745	13.95	14.00	1.012	87.26	1.146	-0.14	0.141	0.163	0.045	0.052
	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1cm	157	5785	13.76	14.00	1.057	87.26	1.146	0.09	0.146	0.177	0.045	0.055
25	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1cm	165	5825	13.82	14.00	1.042	87.26	1.146	0.1	0.163	0.195	0.053	0.063
	WLAN5GHz	802.11a 6Mbps	OFDM	Left Side	1cm	149	5745	13.95	14.00	1.012	87.26	1.146	-0.03	0.122	0.141	0.037	0.043
	WLAN5GHz	802.11a 6Mbps	OFDM	Top Side	1cm	149	5745	13.95	14.00	1.012	87.26	1.146	0.15	0.057	0.066	0.017	0.020

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : PY7PM-0723

Page Number : 69 of 101

Report Issued Date : Mar. 26, 2014

Report Version : Rev. 03

Report Template No. : BU5FAA131214

**13.3 Body Worn SAR****<GSM SAR>**

Plot No.	Band	Mode	Modulation	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	GSM850	GSM Voice	GMSK	Front	1.5cm	128	824.2	33.46	33.50	1.009	0.054	0.519	0.524	0.401	0.405
26	GSM850	GSM Voice	GMSK	Back	1.5cm	128	824.2	33.46	33.50	1.009	-0.062	0.544	0.549	0.421	0.425
	GSM850	GPRS (4 Tx slots)	GMSK	Back	1.5cm	251	848.8	27.49	27.50	1.002	0.014	0.529	0.530	0.412	0.413
	GSM1900	DTM Multi-slot class 11	GSM Voice with 8PSK 2Tx	Front	1.5cm	810	1909.8	21.40	21.65	1.060	-0.05	0.581	0.616	0.330	0.350
	GSM1900	DTM Multi-slot class 11	GSM Voice with 8PSK 2Tx	Back	1.5cm	810	1909.8	21.40	21.65	1.060	-0.02	0.629	0.667	0.358	0.379
27	GSM1900	EGPRS (4 Tx slot)	8PSK	Back	1.5cm	810	1909.8	25.64	25.90	1.062	-0.019	0.752	0.798	0.414	0.440

<WCDMA SAR>

Plot No.	Band	Mode	Modulation	Test Position	Gap (cm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
28	WCDMA V	RMC 12.2Kbps	QPSK	Front	1.5cm		4132	826.4	23.96	24.00	1.009	0.126	0.565	0.570	0.415	0.419
	WCDMA V	RMC 12.2Kbps	QPSK	Back	1.5cm		4132	826.4	23.96	24.00	1.009	0.063	0.534	0.539	0.413	0.417
	WCDMA IV	RMC 12.2Kbps	QPSK	Front	1.5cm		1413	1732.6	23.75	24.00	1.059	0.06	0.953	1.009	0.551	0.584
	WCDMA IV	RMC 12.2Kbps	QPSK	Front	1.5cm		1312	1712.4	23.61	24.00	1.094	0	0.836	0.915	0.490	0.536
	WCDMA IV	RMC 12.2Kbps	QPSK	Front	1.5cm		1513	1752.6	23.69	24.00	1.074	-0.03	1.010	1.085	0.584	0.627
	WCDMA IV	RMC 12.2Kbps	QPSK	Back	1.5cm		1413	1732.6	23.75	24.00	1.059	0.09	0.929	0.984	0.556	0.589
	WCDMA IV	RMC 12.2Kbps	QPSK	Back	1.5cm		1312	1712.4	23.61	24.00	1.094	0	0.822	0.899	0.497	0.544
29	WCDMA IV	RMC 12.2Kbps	QPSK	Back	1.5cm		1513	1752.6	23.69	24.00	1.074	-0.01	1.040	1.117	0.613	0.658
	WCDMA II	RMC 12.2Kbps	QPSK	Front	1.5cm		9262	1852.4	23.92	24.00	1.019	0.003	1.030	1.049	0.592	0.603
	WCDMA II	RMC 12.2Kbps	QPSK	Front	1.5cm		9400	1880	23.78	24.00	1.052	0.097	1.030	1.084	0.588	0.619
	WCDMA II	RMC 12.2Kbps	QPSK	Front	1.5cm		9538	1907.6	23.66	24.00	1.081	0.015	1.020	1.103	0.583	0.630
	WCDMA II	RMC 12.2Kbps	QPSK	Back	1.5cm		9262	1852.4	23.92	24.00	1.019	0.001	1.200	1.222	0.690	0.703
	WCDMA II	RMC 12.2Kbps	QPSK	Back	1.5cm		9400	1880	23.78	24.00	1.052	0.057	1.140	1.199	0.650	0.684
	WCDMA II	RMC 12.2Kbps	QPSK	Back	1.5cm		9538	1907.6	23.66	24.00	1.081	0.027	1.120	1.211	0.638	0.690
	WCDMA II	RMC 12.2Kbps	QPSK	Front	1.5cm	Headset	9400	1880	23.78	24.00	1.052	-0.01	1.200	1.262	0.680	0.715
30	WCDMA II	RMC 12.2Kbps	QPSK	Front	1.5cm	Headset	9262	1852.4	23.92	24.00	1.019	-0.02	1.270	1.294	0.722	0.735
	WCDMA II	RMC 12.2Kbps	QPSK	Front	1.5cm	Headset	9538	1907.6	23.66	24.00	1.081	0.04	1.140	1.233	0.644	0.696
	WCDMA II	RMC 12.2Kbps	QPSK	Back	1.5cm	Headset	9400	1880	23.78	24.00	1.052	0.008	1.100	1.157	0.630	0.663
	WCDMA II	RMC 12.2Kbps	QPSK	Back	1.5cm	Headset	9262	1852.4	23.92	24.00	1.019	-0.009	1.150	1.171	0.663	0.675
	WCDMA II	RMC 12.2Kbps	QPSK	Back	1.5cm	Headset	9538	1907.6	23.66	24.00	1.081	0.036	1.140	1.233	0.649	0.702

**<LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 17	10M	QPSK	1	49	Front	1.5cm	23790	710	23.60	24.00	1.096	0.07	0.170	0.186	0.134	0.147
	LTE Band 17	10M	QPSK	25	0	Front	1.5cm	23780	709	22.55	23.00	1.109	0.05	0.139	0.154	0.110	0.122
31	LTE Band 17	10M	QPSK	1	49	Back	1.5cm	23790	710	23.60	24.00	1.096	0.03	0.201	0.220	0.158	0.173
	LTE Band 17	10M	QPSK	25	0	Back	1.5cm	23780	709	22.55	23.00	1.109	0.03	0.146	0.162	0.114	0.126
	LTE Band 4	20M	QPSK	1	0	Front	1.5cm	20175	1732.5	23.86	24.00	1.033	-0.07	0.763	0.788	0.444	0.459
	LTE Band 4	20M	QPSK	50	0	Front	1.5cm	20300	1745	22.75	23.00	1.059	-0.04	0.554	0.587	0.317	0.336
	LTE Band 4	20M	QPSK	1	0	Back	1.5cm	20175	1732.5	23.86	24.00	1.033	-0.05	0.800	0.826	0.471	0.486
	LTE Band 4	20M	QPSK	1	0	Back	1.5cm	20050	1720	23.66	24.00	1.081	-0.02	0.706	0.763	0.420	0.454
32	LTE Band 4	20M	QPSK	1	0	Back	1.5cm	20300	1745	23.69	24.00	1.074	-0.01	0.818	0.879	0.480	0.516
	LTE Band 4	20M	QPSK	50	0	Back	1.5cm	20300	1745	22.75	23.00	1.059	-0.01	0.688	0.729	0.402	0.426
	LTE Band 4	20M	QPSK	100	0	Back	1.5cm	20300	1745	22.69	23.00	1.074	-0.01	0.685	0.736	0.400	0.430
	LTE Band 2	20M	QPSK	1	0	Front	1.5cm	18700	1860	22.30	22.50	1.047	-0.04	0.710	0.743	0.417	0.437
	LTE Band 2	20M	QPSK	50	0	Front	1.5cm	18700	1860	21.31	21.50	1.045	-0.01	0.619	0.647	0.363	0.379
	LTE Band 2	20M	QPSK	1	0	Back	1.5cm	18700	1860	22.30	22.50	1.047	-0.03	0.811	0.849	0.475	0.497
	LTE Band 2	20M	QPSK	1	0	Back	1.5cm	18900	1880	22.00	22.50	1.122	0.02	0.847	0.950	0.494	0.554
33	LTE Band 2	20M	QPSK	1	0	Back	1.5cm	19100	1900	21.85	22.50	1.161	0.01	0.871	1.012	0.503	0.584
	LTE Band 2	20M	QPSK	50	0	Back	1.5cm	18700	1860	21.31	21.50	1.045	0.01	0.732	0.765	0.427	0.446
	LTE Band 2	20M	QPSK	100	0	Back	1.5cm	18700	1860	21.26	21.50	1.057	0.01	0.722	0.763	0.421	0.445
	LTE Band 7	20M	QPSK	1	0	Front	1.5cm	20850	2510	23.99	24.00	1.002	-0.01	0.752	0.754	0.429	0.430
	LTE Band 7	20M	QPSK	50	0	Front	1.5cm	20850	2510	22.98	23.00	1.005	0	0.621	0.624	0.347	0.349
	LTE Band 7	20M	QPSK	1	0	Back	1.5cm	20850	2510	23.99	24.00	1.002	0	0.867	0.869	0.492	0.493
34	LTE Band 7	20M	QPSK	1	0	Back	1.5cm	21100	2535	23.85	24.00	1.035	-0.02	0.921	0.953	0.508	0.526
	LTE Band 7	20M	QPSK	1	0	Back	1.5cm	21350	2560	23.54	24.00	1.112	0	0.771	0.857	0.423	0.470
	LTE Band 7	20M	QPSK	50	0	Back	1.5cm	20850	2510	22.98	23.00	1.005	-0.03	0.817	0.821	0.430	0.432
	LTE Band 7	20M	QPSK	50	0	Back	1.5cm	21100	2535	22.83	23.00	1.040	-0.03	0.731	0.760	0.402	0.418
	LTE Band 7	20M	QPSK	50	0	Back	1.5cm	21350	2560	22.53	23.00	1.114	0.04	0.610	0.680	0.314	0.350
	LTE Band 7	20M	QPSK	100	0	Back	1.5cm	20850	2510	22.53	23.00	1.114	-0.03	0.708	0.789	0.392	0.437

<WLAN SAR DTS>

Plot No.	Band	Mode	Modulation	Test Position	Gap (cm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Front	1.5cm		6	2437	16.74	17.00	1.061	97.63	1.024	-0.003	0.075	0.081	0.042	0.046
35	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Back	1.5cm		6	2437	16.74	17.00	1.061	97.63	1.024	0.06	0.078	0.085	0.043	0.047
	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Front	1.5cm	Headset	6	2437	16.74	17.00	1.061	97.63	1.024	0.08	0.069	0.075	0.038	0.041
	WLAN2.4GHz	802.11b 1Mbps	DBPSK	Back	1.5cm	Headset	6	2437	16.74	17.00	1.061	97.63	1.024	-0.03	0.068	0.074	0.035	0.038
	WLAN5GHz	802.11a 6Mbps	OFDM	Front	1.5cm		149	5745	13.95	14.00	1.012	87.26	1.146	0	< 0.001	< 0.001	< 0.001	< 0.001
	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1.5cm		149	5745	13.95	14.00	1.012	87.26	1.146	-0.05	0.058	0.067	0.022	0.026
	WLAN5GHz	802.11a 6Mbps	OFDM	Front	1.5cm	Headset	149	5745	13.95	14.00	1.012	87.26	1.146	0	< 0.001	< 0.001	< 0.001	< 0.001
36	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1.5cm	Headset	149	5745	13.95	14.00	1.012	87.26	1.146	0.15	0.096	0.111	0.032	0.037



<WLAN SAR NII>

Plot No.	Band	Mode	Modulation	Test Position	Gap (cm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	OFDM	Front	1.5cm		36	5180	13.90	14.00	1.023	87.26	1.146	0	< 0.001	< 0.001	< 0.001	< 0.001
	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1.5cm		36	5180	13.90	14.00	1.023	87.26	1.146	-0.05	0.064	0.075	0.023	0.027
37	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1.5cm		48	5240	13.86	14.00	1.033	87.26	1.146	0.05	0.070	0.083	0.026	0.031
	WLAN5GHz	802.11a 6Mbps	OFDM	Front	1.5cm	Headset	36	5180	13.90	14.00	1.023	87.26	1.146	0	< 0.001	< 0.001	< 0.001	< 0.001
	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1.5cm	Headset	36	5180	13.90	14.00	1.023	87.26	1.146	0.17	0.057	0.067	0.016	0.019
	WLAN5GHz	802.11a 6Mbps	OFDM	Front	1.5cm		60	5300	13.98	14.00	1.005	87.26	1.146	0	< 0.001	< 0.001	< 0.001	< 0.001
38	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1.5cm		60	5300	13.98	14.00	1.005	87.26	1.146	-0.12	0.081	0.093	0.029	0.033
	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1.5cm		52	5260	13.88	14.00	1.028	87.26	1.146	0.11	0.075	0.088	0.024	0.028
	WLAN5GHz	802.11a 6Mbps	OFDM	Front	1.5cm	Headset	60	5300	13.98	14.00	1.005	87.26	1.146	0	< 0.001	< 0.001	< 0.001	< 0.001
	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1.5cm	Headset	60	5300	13.98	14.00	1.005	87.26	1.146	-0.01	0.071	0.082	0.019	0.022
	WLAN5GHz	802.11a 6Mbps	OFDM	Front	1.5cm		140	5700	13.86	14.00	1.033	87.26	1.146	0	< 0.001	< 0.001	< 0.001	< 0.001
	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1.5cm		140	5700	13.86	14.00	1.033	87.26	1.146	-0.05	0.058	0.069	0.021	0.025
	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1.5cm		100	5500	13.64	14.00	1.086	87.26	1.146	-0.04	0.033	0.041	0.012	0.015
	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1.5cm		116	5580	13.67	14.00	1.079	87.26	1.146	-0.1	0.035	0.043	0.012	0.015
	WLAN5GHz	802.11a 6Mbps	OFDM	Front	1.5cm	Headset	140	5700	13.86	14.00	1.033	87.26	1.146	0	< 0.001	< 0.001	< 0.001	< 0.001
39	WLAN5GHz	802.11a 6Mbps	OFDM	Back	1.5cm	Headset	140	5700	13.86	14.00	1.033	87.26	1.146	0.16	0.084	0.099	0.026	0.031

13.4 Repeated SAR Measurement

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	(Hotspot) Power Back-off	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA IV		QPSK			RMC 12.2Kbps	Back	1.5cm	1513	1752.6	OFF	23.69	24.00	1.074	-0.01	1.040	-	1.117
2nd	WCDMA IV		QPSK			RMC 12.2Kbps	Back	1.5cm	1513	1752.6	OFF	23.69	24.00	1.074	0.14	0.978	1.06	1.050
1st	WCDMA II		QPSK			RMC 12.2Kbps	Bottom Side	1cm	9538	1907.6	ON	18.79	19.00	1.050	0.131	1.300	-	1.364
2nd	WCDMA II		QPSK			RMC 12.2Kbps	Bottom Side	1cm	9538	1907.6	ON	18.79	19.00	1.050	0.001	1.290	1.01	1.354
1st	LTE Band 7	20M	QPSK	1	0		Back	1.5cm	21100	2535	OFF	23.85	24.00	1.035	-0.02	0.921	-	0.953
2nd	LTE Band 7	20M	QPSK	1	0		Back	1.5cm	21100	2535	OFF	23.85	24.00	1.035	0.02	0.840	1.10	0.870

Note:

1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg
2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The ratio is the largest SAR to the smallest SAR among original and repeated measurement.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

14. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Smart Phone			Note
		Head	Body-worn	Hotspot	
1.	GSM(Voice) + WLAN2.4GHz(data)	Yes	Yes		
2.	WCDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes		
3.	GSM(Voice) + Bluetooth(data)	Yes	Yes		
4.	WCDMA((Voice) + Bluetooth(data)	Yes	Yes		
5.	GSM(Voice) + WLAN5GHz(data)	Yes	Yes		
6.	WCDMA(Voice) + WLAN5GHz(data)	Yes	Yes		
7.	GPRS/EDGE/DTM(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
8.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
9.	LTE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
10.	GPRS/EDGE/DTM (Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
11.	WCDMA(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
12.	LTE(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
13.	GPRS/EDGE/DTM (data) + WLAN5GHz(data)	Yes	Yes	Yes	WiFi Direct 5.8GHz (GO)
14.	WCDMA(data) + WLAN5GHz(data)	Yes	Yes	Yes	WiFi Direct 5.8GHz (GO)
15.	LTE(data) + WLAN5GHz(data)	Yes	Yes	Yes	WiFi Direct 5.8GHz (GO)

Note:

- This device supports VoIP in GSM, WCDMA, LTE (e.g. 3rd part VoIP).
- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- This device 2.4GHz WLAN supports Hotspot operation, and 2.4GHz / 5.8GHz WLAN supports WiFi Direct (Group Client / Group Owner), and 5.2GHz / 5.3GHz / 5.5GHz supports WiFi Direct (Group Client only).
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation $< 1.6\text{W/kg}$.
 - $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\min. \text{separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan
If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6\text{W/kg}$
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
 - $(\max. \text{power of channel, including tune-up tolerance, mW}) / (\min. \text{test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum test separation distance is $< 5\text{mm}$, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is $> 50 \text{ mm}$.

Max Power	Exposure Position	Head	Hotspot	Body-worn
	Test separation	5 mm	10 mm	15mm
9.5 dBm	Estimated 1g SAR (W/kg)	0.378 W/kg	0.189 W/kg	0.126 W/kg
	Estimated 10g SAR (W/kg)	0.151 W/kg	0.076 W/kg	0.050 W/kg

14.1 Head Exposure Conditions

<WWAN + WLAN 2.4GHz Band>

Position	WWAN		WLAN	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	1g SAR (W/kg)	
Right Cheek	GSM850	0.496	0.836	1.33
	GSM1900	0.160	0.836	1.00
	WCDMA V	0.647	0.836	1.48
	WCDMA IV	0.329	0.836	1.17
	WCDMA II	0.246	0.836	1.08
	LTE Band 17	0.165	0.836	1.00
	LTE Band 4	0.342	0.836	1.18
	LTE Band 7	0.434	0.836	1.27
Right Tilted	LTE Band 2	0.178	0.836	1.01
	GSM850	0.271	0.566	0.84
	GSM1900	0.073	0.566	0.64
	WCDMA V	0.231	0.566	0.80
	WCDMA IV	0.149	0.566	0.72
	WCDMA II	0.105	0.566	0.67
	LTE Band 17	0.098	0.566	0.66
	LTE Band 4	0.096	0.566	0.66
Left Cheek	LTE Band 7	0.227	0.566	0.79
	LTE Band 2	0.047	0.566	0.61
	GSM850	0.375	0.286	0.66
	GSM1900	0.276	0.286	0.56
	WCDMA V	0.475	0.286	0.76
	WCDMA IV	0.446	0.286	0.73
	WCDMA II	0.577	0.286	0.86
	LTE Band 17	0.148	0.286	0.43
Left Tilted	LTE Band 4	0.520	0.286	0.81
	LTE Band 7	0.581	0.286	0.87
	LTE Band 2	0.409	0.286	0.70
	GSM850	0.217	0.243	0.46
	GSM1900	0.041	0.243	0.28
	WCDMA V	0.300	0.243	0.54
	WCDMA IV	0.232	0.243	0.48
	WCDMA II	0.062	0.243	0.31
	LTE Band 17	0.095	0.243	0.34
	LTE Band 4	0.168	0.243	0.41
	LTE Band 7	0.140	0.243	0.38
	LTE Band 2	0.054	0.243	0.30



Position	WWAN		WLAN	Summed 10g SAR (W/kg)
	WWAN Band	10g SAR (W/kg)	10g SAR (W/kg)	
Right Cheek	GSM850	0.379	0.392	0.77
	GSM1900	0.102	0.392	0.49
	WCDMA V	0.490	0.392	0.88
	WCDMA IV	0.211	0.392	0.60
	WCDMA II	0.161	0.392	0.55
	LTE Band 17	0.131	0.392	0.52
	LTE Band 4	0.216	0.392	0.61
	LTE Band 7	0.232	0.392	0.62
Right Tilted	LTE Band 2	0.121	0.392	0.51
	GSM850	0.211	0.267	0.48
	GSM1900	0.043	0.267	0.31
	WCDMA V	0.169	0.267	0.44
	WCDMA IV	0.090	0.267	0.36
	WCDMA II	0.066	0.267	0.33
	LTE Band 17	0.079	0.267	0.35
	LTE Band 4	0.055	0.267	0.32
Left Cheek	LTE Band 7	0.112	0.267	0.38
	LTE Band 2	0.030	0.267	0.30
	GSM850	0.292	0.142	0.43
	GSM1900	0.164	0.142	0.31
	WCDMA V	0.368	0.142	0.51
	WCDMA IV	0.275	0.142	0.42
	WCDMA II	0.350	0.142	0.49
	LTE Band 17	0.117	0.142	0.26
Left Tilted	LTE Band 4	0.314	0.142	0.46
	LTE Band 7	0.300	0.142	0.44
	LTE Band 2	0.250	0.142	0.39
	GSM850	0.173	0.124	0.30
	GSM1900	0.024	0.124	0.15
	WCDMA V	0.234	0.124	0.36
	WCDMA IV	0.139	0.124	0.26
	WCDMA II	0.035	0.124	0.16
	LTE Band 17	0.077	0.124	0.20
	LTE Band 4	0.101	0.124	0.23
	LTE Band 7	0.070	0.124	0.19
	LTE Band 2	0.036	0.124	0.16



<WWAN + WLAN 5.2GHz Band>

Position	WWAN		WLAN	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	1g SAR (W/kg)	
Right Cheek	GSM850	0.496	0.103	0.60
	GSM1900	0.160	0.103	0.26
	WCDMA V	0.647	0.103	0.75
	WCDMA IV	0.329	0.103	0.43
	WCDMA II	0.246	0.103	0.35
	LTE Band 17	0.165	0.103	0.27
	LTE Band 4	0.342	0.103	0.45
	LTE Band 7	0.434	0.103	0.54
	LTE Band 2	0.178	0.103	0.28
Right Tilted	GSM850	0.271	0.136	0.41
	GSM1900	0.073	0.136	0.21
	WCDMA V	0.231	0.136	0.37
	WCDMA IV	0.149	0.136	0.29
	WCDMA II	0.105	0.136	0.24
	LTE Band 17	0.098	0.136	0.23
	LTE Band 4	0.096	0.136	0.23
	LTE Band 7	0.227	0.136	0.36
	LTE Band 2	0.047	0.136	0.18
Left Cheek	GSM850	0.375	0.041	0.42
	GSM1900	0.276	0.041	0.32
	WCDMA V	0.475	0.041	0.52
	WCDMA IV	0.446	0.041	0.49
	WCDMA II	0.577	0.041	0.62
	LTE Band 17	0.148	0.041	0.19
	LTE Band 4	0.520	0.041	0.56
	LTE Band 7	0.581	0.041	0.62
	LTE Band 2	0.409	0.041	0.45
Left Tilted	GSM850	0.217	0.052	0.27
	GSM1900	0.041	0.052	0.09
	WCDMA V	0.300	0.052	0.35
	WCDMA IV	0.232	0.052	0.28
	WCDMA II	0.062	0.052	0.11
	LTE Band 17	0.095	0.052	0.15
	LTE Band 4	0.168	0.052	0.22
	LTE Band 7	0.140	0.052	0.19
	LTE Band 2	0.054	0.052	0.11



Position	WWAN		WLAN	Summed 10g SAR (W/kg)
	WWAN Band	10g SAR (W/kg)	10g SAR (W/kg)	
Right Cheek	GSM850	0.379	0.035	0.41
	GSM1900	0.102	0.035	0.14
	WCDMA V	0.490	0.035	0.53
	WCDMA IV	0.211	0.035	0.25
	WCDMA II	0.161	0.035	0.20
	LTE Band 17	0.131	0.035	0.17
	LTE Band 4	0.216	0.035	0.25
	LTE Band 7	0.232	0.035	0.27
Right Tilted	LTE Band 2	0.121	0.035	0.16
	GSM850	0.211	0.038	0.25
	GSM1900	0.043	0.038	0.08
	WCDMA V	0.169	0.038	0.21
	WCDMA IV	0.090	0.038	0.13
	WCDMA II	0.066	0.038	0.10
	LTE Band 17	0.079	0.038	0.12
	LTE Band 4	0.055	0.038	0.09
Left Cheek	LTE Band 7	0.112	0.038	0.15
	LTE Band 2	0.030	0.038	0.07
	GSM850	0.292	0.013	0.31
	GSM1900	0.164	0.013	0.18
	WCDMA V	0.368	0.013	0.38
	WCDMA IV	0.275	0.013	0.29
	WCDMA II	0.350	0.013	0.36
	LTE Band 17	0.117	0.013	0.13
Left Tilted	LTE Band 4	0.314	0.013	0.33
	LTE Band 7	0.300	0.013	0.31
	LTE Band 2	0.250	0.013	0.26
	GSM850	0.173	0.016	0.19
	GSM1900	0.024	0.016	0.04
	WCDMA V	0.234	0.016	0.25
	WCDMA IV	0.139	0.016	0.16
	WCDMA II	0.035	0.016	0.05
	LTE Band 17	0.077	0.016	0.09
	LTE Band 4	0.101	0.016	0.12
	LTE Band 7	0.070	0.016	0.09
	LTE Band 2	0.036	0.016	0.05



<WWAN + WLAN 5.3GHz Band>

Position	WWAN		WLAN	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	1g SAR (W/kg)	
Right Cheek	GSM850	0.496	0.176	0.67
	GSM1900	0.160	0.176	0.34
	WCDMA V	0.647	0.176	0.82
	WCDMA IV	0.329	0.176	0.51
	WCDMA II	0.246	0.176	0.42
	LTE Band 17	0.165	0.176	0.34
	LTE Band 4	0.342	0.176	0.52
	LTE Band 7	0.434	0.176	0.61
	LTE Band 2	0.178	0.176	0.35
Right Tilted	GSM850	0.271	0.087	0.36
	GSM1900	0.073	0.087	0.16
	WCDMA V	0.231	0.087	0.32
	WCDMA IV	0.149	0.087	0.24
	WCDMA II	0.105	0.087	0.19
	LTE Band 17	0.098	0.087	0.19
	LTE Band 4	0.096	0.087	0.18
	LTE Band 7	0.227	0.087	0.31
	LTE Band 2	0.047	0.087	0.13
Left Cheek	GSM850	0.375	0.038	0.41
	GSM1900	0.276	0.038	0.31
	WCDMA V	0.475	0.038	0.51
	WCDMA IV	0.446	0.038	0.48
	WCDMA II	0.577	0.038	0.62
	LTE Band 17	0.148	0.038	0.19
	LTE Band 4	0.520	0.038	0.56
	LTE Band 7	0.581	0.038	0.62
	LTE Band 2	0.409	0.038	0.45
Left Tilted	GSM850	0.217	0.035	0.25
	GSM1900	0.041	0.035	0.08
	WCDMA V	0.300	0.035	0.34
	WCDMA IV	0.232	0.035	0.27
	WCDMA II	0.062	0.035	0.10
	LTE Band 17	0.095	0.035	0.13
	LTE Band 4	0.168	0.035	0.20
	LTE Band 7	0.140	0.035	0.18
	LTE Band 2	0.054	0.035	0.09



Position	WWAN		WLAN	Summed 10g SAR (W/kg)
	WWAN Band	10g SAR (W/kg)	10g SAR (W/kg)	
Right Cheek	GSM850	0.379	0.046	0.43
	GSM1900	0.102	0.046	0.15
	WCDMA V	0.490	0.046	0.54
	WCDMA IV	0.211	0.046	0.26
	WCDMA II	0.161	0.046	0.21
	LTE Band 17	0.131	0.046	0.18
	LTE Band 4	0.216	0.046	0.26
	LTE Band 7	0.232	0.046	0.28
Right Tilted	LTE Band 2	0.121	0.046	0.17
	GSM850	0.211	0.026	0.24
	GSM1900	0.043	0.026	0.07
	WCDMA V	0.169	0.026	0.20
	WCDMA IV	0.090	0.026	0.12
	WCDMA II	0.066	0.026	0.09
	LTE Band 17	0.079	0.026	0.11
	LTE Band 4	0.055	0.026	0.08
Left Cheek	LTE Band 7	0.112	0.026	0.14
	LTE Band 2	0.030	0.026	0.06
	GSM850	0.292	0.01	0.30
	GSM1900	0.164	0.01	0.17
	WCDMA V	0.368	0.01	0.38
	WCDMA IV	0.275	0.01	0.29
	WCDMA II	0.350	0.01	0.36
	LTE Band 17	0.117	0.01	0.13
Left Tilted	LTE Band 4	0.314	0.01	0.32
	LTE Band 7	0.300	0.01	0.31
	LTE Band 2	0.250	0.01	0.26
	GSM850	0.173	0.011	0.18
	GSM1900	0.024	0.011	0.04
	WCDMA V	0.234	0.011	0.25
	WCDMA IV	0.139	0.011	0.15
	WCDMA II	0.035	0.011	0.05
	LTE Band 17	0.077	0.011	0.09
	LTE Band 4	0.101	0.011	0.11
	LTE Band 7	0.070	0.011	0.08
	LTE Band 2	0.036	0.011	0.05



<WWAN + WLAN 5.5GHz Band>

Position	WWAN		WLAN	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	1g SAR (W/kg)	
Right Cheek	GSM850	0.496	0.115	0.61
	GSM1900	0.160	0.115	0.28
	WCDMA V	0.647	0.115	0.76
	WCDMA IV	0.329	0.115	0.44
	WCDMA II	0.246	0.115	0.36
	LTE Band 17	0.165	0.115	0.28
	LTE Band 4	0.342	0.115	0.46
	LTE Band 7	0.434	0.115	0.55
	LTE Band 2	0.178	0.115	0.29
Right Tilted	GSM850	0.271	0.057	0.33
	GSM1900	0.073	0.057	0.13
	WCDMA V	0.231	0.057	0.29
	WCDMA IV	0.149	0.057	0.21
	WCDMA II	0.105	0.057	0.16
	LTE Band 17	0.098	0.057	0.16
	LTE Band 4	0.096	0.057	0.15
	LTE Band 7	0.227	0.057	0.28
	LTE Band 2	0.047	0.057	0.10
Left Cheek	GSM850	0.375	0.034	0.41
	GSM1900	0.276	0.034	0.31
	WCDMA V	0.475	0.034	0.51
	WCDMA IV	0.446	0.034	0.48
	WCDMA II	0.577	0.034	0.61
	LTE Band 17	0.148	0.034	0.18
	LTE Band 4	0.520	0.034	0.55
	LTE Band 7	0.581	0.034	0.62
	LTE Band 2	0.409	0.034	0.44
Left Tilted	GSM850	0.217	0.027	0.24
	GSM1900	0.041	0.027	0.07
	WCDMA V	0.300	0.027	0.33
	WCDMA IV	0.232	0.027	0.26
	WCDMA II	0.062	0.027	0.09
	LTE Band 17	0.095	0.027	0.12
	LTE Band 4	0.168	0.027	0.20
	LTE Band 7	0.140	0.027	0.17
	LTE Band 2	0.054	0.027	0.08



Position	WWAN		WLAN	Summed 10g SAR (W/kg)
	WWAN Band	10g SAR (W/kg)	10g SAR (W/kg)	
Right Cheek	GSM850	0.379	0.059	0.44
	GSM1900	0.102	0.059	0.16
	WCDMA V	0.490	0.059	0.55
	WCDMA IV	0.211	0.059	0.27
	WCDMA II	0.161	0.059	0.22
	LTE Band 17	0.131	0.059	0.19
	LTE Band 4	0.216	0.059	0.28
	LTE Band 7	0.232	0.059	0.29
	LTE Band 2	0.121	0.059	0.18
Right Tilted	GSM850	0.211	0.02	0.23
	GSM1900	0.043	0.02	0.06
	WCDMA V	0.169	0.02	0.19
	WCDMA IV	0.090	0.02	0.11
	WCDMA II	0.066	0.02	0.09
	LTE Band 17	0.079	0.02	0.10
	LTE Band 4	0.055	0.02	0.08
	LTE Band 7	0.112	0.02	0.13
	LTE Band 2	0.030	0.02	0.05
Left Cheek	GSM850	0.292	0.007	0.30
	GSM1900	0.164	0.007	0.17
	WCDMA V	0.368	0.007	0.38
	WCDMA IV	0.275	0.007	0.28
	WCDMA II	0.350	0.007	0.36
	LTE Band 17	0.117	0.007	0.12
	LTE Band 4	0.314	0.007	0.32
	LTE Band 7	0.300	0.007	0.31
	LTE Band 2	0.250	0.007	0.26
Left Tilted	GSM850	0.173	0.007	0.18
	GSM1900	0.024	0.007	0.03
	WCDMA V	0.234	0.007	0.24
	WCDMA IV	0.139	0.007	0.15
	WCDMA II	0.035	0.007	0.04
	LTE Band 17	0.077	0.007	0.08
	LTE Band 4	0.101	0.007	0.11
	LTE Band 7	0.070	0.007	0.08
	LTE Band 2	0.036	0.007	0.04



<WWAN + WLAN 5.8GHz Band>

Position	WWAN		WLAN	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	1g SAR (W/kg)	
Right Cheek	GSM850	0.496	0.214	0.71
	GSM1900	0.160	0.214	0.37
	WCDMA V	0.647	0.214	0.86
	WCDMA IV	0.329	0.214	0.54
	WCDMA II	0.246	0.214	0.46
	LTE Band 17	0.165	0.214	0.38
	LTE Band 4	0.342	0.214	0.56
	LTE Band 7	0.434	0.214	0.65
	LTE Band 2	0.178	0.214	0.39
Right Tilted	GSM850	0.271	0.252	0.52
	GSM1900	0.073	0.252	0.33
	WCDMA V	0.231	0.252	0.48
	WCDMA IV	0.149	0.252	0.40
	WCDMA II	0.105	0.252	0.36
	LTE Band 17	0.098	0.252	0.35
	LTE Band 4	0.096	0.252	0.35
	LTE Band 7	0.227	0.252	0.48
	LTE Band 2	0.047	0.252	0.30
Left Cheek	GSM850	0.375	0.137	0.51
	GSM1900	0.276	0.137	0.41
	WCDMA V	0.475	0.137	0.61
	WCDMA IV	0.446	0.137	0.58
	WCDMA II	0.577	0.137	0.71
	LTE Band 17	0.148	0.137	0.29
	LTE Band 4	0.520	0.137	0.66
	LTE Band 7	0.581	0.137	0.72
	LTE Band 2	0.409	0.137	0.55
Left Tilted	GSM850	0.217	0.124	0.34
	GSM1900	0.041	0.124	0.17
	WCDMA V	0.300	0.124	0.42
	WCDMA IV	0.232	0.124	0.36
	WCDMA II	0.062	0.124	0.19
	LTE Band 17	0.095	0.124	0.22
	LTE Band 4	0.168	0.124	0.29
	LTE Band 7	0.140	0.124	0.26
	LTE Band 2	0.054	0.124	0.18



	WWAN		WLAN	Summed 10g SAR (W/kg)
Position	WWAN Band	10g SAR (W/kg)	10g SAR (W/kg)	
Right Cheek	GSM850	0.379	0.086	0.47
	GSM1900	0.102	0.086	0.19
	WCDMA V	0.490	0.086	0.58
	WCDMA IV	0.211	0.086	0.30
	WCDMA II	0.161	0.086	0.25
	LTE Band 17	0.131	0.086	0.22
	LTE Band 4	0.216	0.086	0.30
	LTE Band 7	0.232	0.086	0.32
	LTE Band 2	0.121	0.086	0.21
Right Tilted	GSM850	0.211	0.102	0.31
	GSM1900	0.043	0.102	0.15
	WCDMA V	0.169	0.102	0.27
	WCDMA IV	0.090	0.102	0.19
	WCDMA II	0.066	0.102	0.17
	LTE Band 17	0.079	0.102	0.18
	LTE Band 4	0.055	0.102	0.16
	LTE Band 7	0.112	0.102	0.21
	LTE Band 2	0.030	0.102	0.13
Left Cheek	GSM850	0.292	0.061	0.35
	GSM1900	0.164	0.061	0.23
	WCDMA V	0.368	0.061	0.43
	WCDMA IV	0.275	0.061	0.34
	WCDMA II	0.350	0.061	0.41
	LTE Band 17	0.117	0.061	0.18
	LTE Band 4	0.314	0.061	0.38
	LTE Band 7	0.300	0.061	0.36
	LTE Band 2	0.250	0.061	0.31
Left Tilted	GSM850	0.173	0.058	0.23
	GSM1900	0.024	0.058	0.08
	WCDMA V	0.234	0.058	0.29
	WCDMA IV	0.139	0.058	0.20
	WCDMA II	0.035	0.058	0.09
	LTE Band 17	0.077	0.058	0.14
	LTE Band 4	0.101	0.058	0.16
	LTE Band 7	0.070	0.058	0.13
	LTE Band 2	0.036	0.058	0.09



<WWAN + Bluetooth>

Position	WWAN		Bluetooth	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	Estimated 1g SAR (W/kg)	
Right Cheek	GSM850	0.496	0.378	0.87
	GSM1900	0.160	0.378	0.54
	WCDMA V	0.647	0.378	1.03
	WCDMA IV	0.329	0.378	0.71
	WCDMA II	0.246	0.378	0.62
	LTE Band 17	0.165	0.378	0.54
	LTE Band 4	0.342	0.378	0.72
	LTE Band 7	0.434	0.378	0.81
	LTE Band 2	0.178	0.378	0.56
Right Tilted	GSM850	0.271	0.378	0.65
	GSM1900	0.073	0.378	0.45
	WCDMA V	0.231	0.378	0.61
	WCDMA IV	0.149	0.378	0.53
	WCDMA II	0.105	0.378	0.48
	LTE Band 17	0.098	0.378	0.48
	LTE Band 4	0.096	0.378	0.47
	LTE Band 7	0.227	0.378	0.61
	LTE Band 2	0.047	0.378	0.43
Left Cheek	GSM850	0.375	0.378	0.75
	GSM1900	0.276	0.378	0.65
	WCDMA V	0.475	0.378	0.85
	WCDMA IV	0.446	0.378	0.82
	WCDMA II	0.577	0.378	0.96
	LTE Band 17	0.148	0.378	0.53
	LTE Band 4	0.520	0.378	0.90
	LTE Band 7	0.581	0.378	0.96
	LTE Band 2	0.409	0.378	0.79
Left Tilted	GSM850	0.217	0.378	0.60
	GSM1900	0.041	0.378	0.42
	WCDMA V	0.300	0.378	0.68
	WCDMA IV	0.232	0.378	0.61
	WCDMA II	0.062	0.378	0.44
	LTE Band 17	0.095	0.378	0.47
	LTE Band 4	0.168	0.378	0.55
	LTE Band 7	0.140	0.378	0.52
	LTE Band 2	0.054	0.378	0.43



Position	WWAN		Bluetooth	Summed 10g SAR (W/kg)
	WWAN Band	10g SAR (W/kg)	Estimated 10g SAR (W/kg)	
Right Cheek	GSM850	0.379	0.151	0.53
	GSM1900	0.102	0.151	0.25
	WCDMA V	0.490	0.151	0.64
	WCDMA IV	0.211	0.151	0.36
	WCDMA II	0.161	0.151	0.31
	LTE Band 17	0.131	0.151	0.28
	LTE Band 4	0.216	0.151	0.37
	LTE Band 7	0.232	0.151	0.38
	LTE Band 2	0.121	0.151	0.27
Right Tilted	GSM850	0.211	0.151	0.36
	GSM1900	0.043	0.151	0.19
	WCDMA V	0.169	0.151	0.32
	WCDMA IV	0.090	0.151	0.24
	WCDMA II	0.066	0.151	0.22
	LTE Band 17	0.079	0.151	0.23
	LTE Band 4	0.055	0.151	0.21
	LTE Band 7	0.112	0.151	0.26
	LTE Band 2	0.030	0.151	0.18
Left Cheek	GSM850	0.292	0.151	0.44
	GSM1900	0.164	0.151	0.32
	WCDMA V	0.368	0.151	0.52
	WCDMA IV	0.275	0.151	0.43
	WCDMA II	0.350	0.151	0.50
	LTE Band 17	0.117	0.151	0.27
	LTE Band 4	0.314	0.151	0.47
	LTE Band 7	0.300	0.151	0.45
	LTE Band 2	0.250	0.151	0.40
Left Tilted	GSM850	0.173	0.151	0.32
	GSM1900	0.024	0.151	0.18
	WCDMA V	0.234	0.151	0.39
	WCDMA IV	0.139	0.151	0.29
	WCDMA II	0.035	0.151	0.19
	LTE Band 17	0.077	0.151	0.23
	LTE Band 4	0.101	0.151	0.25
	LTE Band 7	0.070	0.151	0.22
	LTE Band 2	0.036	0.151	0.19



14.2 Hotspot Exposure Conditions

<WWAN + WLAN2.4GHz Band>

Position	WWAN		WLAN	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	1g SAR (W/kg)	
Front	GSM850	0.560	0.152	0.71
	GSM1900	0.515	0.152	0.67
	WCDMA V	0.693	0.152	0.85
	WCDMA IV	0.973	0.152	1.13
	WCDMA II	1.007	0.152	1.16
	LTE Band 17	0.226	0.152	0.38
	LTE Band 4	0.752	0.152	0.90
	LTE Band 7	0.959	0.152	1.11
Back	LTE Band 2	0.894	0.152	1.05
	GSM850	0.524	0.195	0.72
	GSM1900	0.693	0.195	0.89
	WCDMA V	0.588	0.195	0.78
	WCDMA IV	0.789	0.195	0.98
	WCDMA II	0.979	0.195	1.17
	LTE Band 17	0.263	0.195	0.46
	LTE Band 4	0.775	0.195	0.97
Left Side	LTE Band 7	0.960	0.195	1.16
	LTE Band 2	1.024	0.195	1.22
	GSM850	0.398	0.118	0.52
	GSM1900	0.088	0.118	0.21
	WCDMA V	0.504	0.118	0.62
	WCDMA IV	0.125	0.118	0.24
	WCDMA II	0.118	0.118	0.24
	LTE Band 17	0.163	0.118	0.28
Right Side	LTE Band 4	0.109	0.118	0.23
	LTE Band 7	0.258	0.118	0.38
	LTE Band 2	0.092	0.118	0.21
	GSM850	0.490		0.49
	GSM1900	0.031		0.03
	WCDMA V	0.360		0.36
	WCDMA IV	0.090		0.09
	WCDMA II	0.051		0.05
Top Side	LTE Band 17	0.173		0.17
	LTE Band 4	0.078		0.08
	LTE Band 7	0.128		0.13
	LTE Band 2	0.038		0.04
	GSM850		0.153	0.15
	GSM1900		0.153	0.15
	WCDMA V		0.153	0.15
	WCDMA IV		0.153	0.15
Bottom Side	WCDMA II		0.153	0.15
	LTE Band 17		0.153	0.15
	LTE Band 4		0.153	0.15
	LTE Band 7		0.153	0.15
	LTE Band 2		0.153	0.15
	GSM850	0.134		0.13
	GSM1900	0.997		1.00
	WCDMA V	0.140		0.14
	WCDMA IV	1.057		1.06
	WCDMA II	1.364		1.36
	LTE Band 17	0.029		0.03
	LTE Band 4	0.963		0.96
	LTE Band 7	0.985		0.99
	LTE Band 2	1.266		1.27



Position	WWAN		WLAN	Summed 10g SAR (W/kg)
	WWAN Band	10g SAR (W/kg)	10g SAR (W/kg)	
Front	GSM850	0.410	0.085	0.50
	GSM1900	0.273	0.085	0.36
	WCDMA V	0.542	0.085	0.63
	WCDMA IV	0.516	0.085	0.60
	WCDMA II	0.526	0.085	0.61
	LTE Band 17	0.180	0.085	0.27
	LTE Band 4	0.405	0.085	0.49
	LTE Band 7	0.512	0.085	0.60
Back	LTE Band 2	0.479	0.085	0.56
	GSM850	0.406	0.090	0.50
	GSM1900	0.365	0.090	0.46
	WCDMA V	0.460	0.090	0.55
	WCDMA IV	0.444	0.090	0.53
	WCDMA II	0.516	0.090	0.61
	LTE Band 17	0.207	0.090	0.30
	LTE Band 4	0.419	0.090	0.51
Left Side	LTE Band 7	0.486	0.090	0.58
	LTE Band 2	0.547	0.090	0.64
	GSM850	0.277	0.056	0.33
	GSM1900	0.050	0.056	0.11
	WCDMA V	0.351	0.056	0.41
	WCDMA IV	0.075	0.056	0.13
	WCDMA II	0.068	0.056	0.12
	LTE Band 17	0.117	0.056	0.17
Right Side	LTE Band 4	0.066	0.056	0.12
	LTE Band 7	0.142	0.056	0.20
	LTE Band 2	0.055	0.056	0.11
	GSM850	0.341		0.34
	GSM1900	0.019		0.02
	WCDMA V	0.251		0.25
	WCDMA IV	0.053		0.05
	WCDMA II	0.032		0.03
Top Side	LTE Band 17	0.125		0.13
	LTE Band 4	0.048		0.05
	LTE Band 7	0.072		0.07
	LTE Band 2	0.024		0.02
	GSM850		0.080	0.08
	GSM1900		0.080	0.08
	WCDMA V		0.080	0.08
	WCDMA IV		0.080	0.08
Bottom Side	WCDMA II		0.080	0.08
	LTE Band 17		0.080	0.08
	LTE Band 4		0.080	0.08
	LTE Band 7		0.080	0.08
	LTE Band 2		0.080	0.08
	GSM850	0.076		0.08
	GSM1900	0.512		0.51
	WCDMA V	0.079		0.08
	WCDMA IV	0.561		0.56
	WCDMA II	0.700		0.70
	LTE Band 17	0.016		0.02
	LTE Band 4	0.514		0.51
	LTE Band 7	0.515		0.52
	LTE Band 2	0.662		0.66



<WWAN + WLAN 5.8GHz Band>

Position	WWAN		WLAN	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	1g SAR (W/kg)	
Front	GSM850	0.560	0.027	0.59
	GSM1900	0.515	0.027	0.54
	WCDMA V	0.693	0.027	0.72
	WCDMA IV	0.973	0.027	1.00
	WCDMA II	1.007	0.027	1.03
	LTE Band 17	0.226	0.027	0.25
	LTE Band 4	0.752	0.027	0.78
	LTE Band 7	0.959	0.027	0.99
Back	LTE Band 2	0.894	0.027	0.92
	GSM850	0.524	0.195	0.72
	GSM1900	0.693	0.195	0.89
	WCDMA V	0.588	0.195	0.78
	WCDMA IV	0.789	0.195	0.98
	WCDMA II	0.979	0.195	1.17
	LTE Band 17	0.263	0.195	0.46
	LTE Band 4	0.775	0.195	0.97
Left Side	LTE Band 7	0.960	0.195	1.16
	LTE Band 2	1.024	0.195	1.22
	GSM850	0.398	0.141	0.54
	GSM1900	0.088	0.141	0.23
	WCDMA V	0.504	0.141	0.65
	WCDMA IV	0.125	0.141	0.27
	WCDMA II	0.118	0.141	0.26
	LTE Band 17	0.163	0.141	0.30
Right Side	LTE Band 4	0.109	0.141	0.25
	LTE Band 7	0.258	0.141	0.40
	LTE Band 2	0.092	0.141	0.23
	GSM850	0.490		0.49
	GSM1900	0.031		0.03
	WCDMA V	0.360		0.36
	WCDMA IV	0.090		0.09
	WCDMA II	0.051		0.05
Top Side	LTE Band 17	0.173		0.17
	LTE Band 4	0.078		0.08
	LTE Band 7	0.128		0.13
	LTE Band 2	0.038		0.04
	GSM850		0.066	0.07
	GSM1900		0.066	0.07
	WCDMA V		0.066	0.07
	WCDMA IV		0.066	0.07
Bottom Side	WCDMA II		0.066	0.07
	LTE Band 17		0.066	0.07
	LTE Band 4		0.066	0.07
	LTE Band 7		0.066	0.07
	LTE Band 2		0.066	0.07
	GSM850	0.134		0.13
	GSM1900	0.997		1.00
	WCDMA V	0.140		0.14
	WCDMA IV	1.057		1.06
	WCDMA II	1.364		1.36
	LTE Band 17	0.029		0.03
	LTE Band 4	0.963		0.96
	LTE Band 7	0.985		0.99
	LTE Band 2	0.662		0.66



Position	WWAN		WLAN	Summed 10g SAR (W/kg)
	WWAN Band	10g SAR (W/kg)	10g SAR (W/kg)	
Front	GSM850	0.410	0.009	0.42
	GSM1900	0.273	0.009	0.28
	WCDMA V	0.542	0.009	0.55
	WCDMA IV	0.516	0.009	0.53
	WCDMA II	0.526	0.009	0.54
	LTE Band 17	0.180	0.009	0.19
	LTE Band 4	0.405	0.009	0.41
	LTE Band 7	0.512	0.009	0.52
Back	LTE Band 2	0.479	0.009	0.49
	GSM850	0.406	0.063	0.47
	GSM1900	0.365	0.063	0.43
	WCDMA V	0.460	0.063	0.52
	WCDMA IV	0.444	0.063	0.51
	WCDMA II	0.516	0.063	0.58
	LTE Band 17	0.207	0.063	0.27
	LTE Band 4	0.419	0.063	0.48
Left Side	LTE Band 7	0.486	0.063	0.55
	LTE Band 2	0.547	0.063	0.61
	GSM850	0.277	0.043	0.32
	GSM1900	0.050	0.043	0.09
	WCDMA V	0.351	0.043	0.39
	WCDMA IV	0.075	0.043	0.12
	WCDMA II	0.068	0.043	0.11
	LTE Band 17	0.117	0.043	0.16
Right Side	LTE Band 4	0.066	0.043	0.11
	LTE Band 7	0.142	0.043	0.19
	LTE Band 2	0.055	0.043	0.10
	GSM850	0.341		0.34
	GSM1900	0.019		0.02
	WCDMA V	0.251		0.25
	WCDMA IV	0.053		0.05
	WCDMA II	0.032		0.03
Top Side	LTE Band 17	0.125		0.13
	LTE Band 4	0.048		0.05
	LTE Band 7	0.072		0.07
	LTE Band 2	0.024		0.02
	GSM850		0.02	0.02
	GSM1900		0.02	0.02
	WCDMA V		0.02	0.02
	WCDMA IV		0.02	0.02
Bottom Side	WCDMA II		0.02	0.02
	LTE Band 17		0.02	0.02
	LTE Band 4		0.02	0.02
	LTE Band 7		0.02	0.02
	LTE Band 2		0.02	0.02
	GSM850	0.076		0.08
	GSM1900	0.512		0.51
	WCDMA V	0.079		0.08
	WCDMA IV	0.561		0.56
	WCDMA II	0.700		0.70
	LTE Band 17	0.016		0.02
	LTE Band 4	0.514		0.51
	LTE Band 7	0.515		0.52
	LTE Band 2	0.662		0.66



<WWAN + Bluetooth>

Position	WWAN		Bluetooth	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	Estimated 1g SAR (W/kg)	
Front	GSM850	0.560	0.189	0.75
	GSM1900	0.515	0.189	0.70
	WCDMA V	0.693	0.189	0.88
	WCDMA IV	0.973	0.189	1.16
	WCDMA II	1.007	0.189	1.20
	LTE Band 17	0.226	0.189	0.42
	LTE Band 4	0.752	0.189	0.94
	LTE Band 7	0.959	0.189	1.15
Back	LTE Band 2	0.894	0.189	1.08
	GSM850	0.524	0.189	0.71
	GSM1900	0.693	0.189	0.88
	WCDMA V	0.588	0.189	0.78
	WCDMA IV	0.789	0.189	0.98
	WCDMA II	0.979	0.189	1.17
	LTE Band 17	0.263	0.189	0.45
	LTE Band 4	0.775	0.189	0.96
Left Side	LTE Band 7	0.960	0.189	1.15
	LTE Band 2	1.024	0.189	1.21
	GSM850	0.398	0.189	0.59
	GSM1900	0.088	0.189	0.28
	WCDMA V	0.504	0.189	0.69
	WCDMA IV	0.125	0.189	0.31
	WCDMA II	0.118	0.189	0.31
	LTE Band 17	0.163	0.189	0.35
Right Side	LTE Band 4	0.109	0.189	0.30
	LTE Band 7	0.258	0.189	0.45
	LTE Band 2	0.092	0.189	0.28
	GSM850	0.490		0.49
	GSM1900	0.031		0.03
	WCDMA V	0.360		0.36
	WCDMA IV	0.090		0.09
	WCDMA II	0.051		0.05
Top Side	LTE Band 17	0.173		0.17
	LTE Band 4	0.078		0.08
	LTE Band 7	0.128		0.13
	LTE Band 2	0.038		0.04
	GSM850		0.189	0.19
	GSM1900		0.189	0.19
	WCDMA V		0.189	0.19
	WCDMA IV		0.189	0.19
Bottom Side	WCDMA II		0.189	0.19
	LTE Band 17		0.189	0.19
	LTE Band 4		0.189	0.19
	LTE Band 7		0.189	0.19
	LTE Band 2		0.189	0.19
	GSM850	0.134		0.13
	GSM1900	0.997		1.00
	WCDMA V	0.140		0.14
	WCDMA IV	1.057		1.06
	WCDMA II	1.364		1.36
	LTE Band 17	0.029		0.03
	LTE Band 4	0.963		0.96
	LTE Band 7	0.985		0.99
	LTE Band 2	1.266		1.27



Position	WWAN		Bluetooth	Summed 10g SAR (W/kg)
	WWAN Band	10g SAR (W/kg)	Estimated 10g SAR (W/kg)	
Front	GSM850	0.410	0.076	0.49
	GSM1900	0.273	0.076	0.35
	WCDMA V	0.542	0.076	0.62
	WCDMA IV	0.516	0.076	0.59
	WCDMA II	0.526	0.076	0.60
	LTE Band 17	0.180	0.076	0.26
	LTE Band 4	0.405	0.076	0.48
	LTE Band 7	0.512	0.076	0.59
Back	LTE Band 2	0.479	0.076	0.56
	GSM850	0.406	0.076	0.48
	GSM1900	0.365	0.076	0.44
	WCDMA V	0.460	0.076	0.54
	WCDMA IV	0.444	0.076	0.52
	WCDMA II	0.516	0.076	0.59
	LTE Band 17	0.207	0.076	0.28
	LTE Band 4	0.419	0.076	0.50
Left Side	LTE Band 7	0.486	0.076	0.56
	LTE Band 2	0.547	0.076	0.62
	GSM850	0.277	0.076	0.35
	GSM1900	0.050	0.076	0.13
	WCDMA V	0.351	0.076	0.43
	WCDMA IV	0.075	0.076	0.15
	WCDMA II	0.068	0.076	0.14
	LTE Band 17	0.117	0.076	0.19
Right Side	LTE Band 4	0.066	0.076	0.14
	LTE Band 7	0.142	0.076	0.22
	LTE Band 2	0.055	0.076	0.13
	GSM850	0.341		0.34
	GSM1900	0.019		0.02
	WCDMA V	0.251		0.25
	WCDMA IV	0.053		0.05
	WCDMA II	0.032		0.03
Top Side	LTE Band 17	0.125		0.13
	LTE Band 4	0.048		0.05
	LTE Band 7	0.072		0.07
	LTE Band 2	0.024		0.02
	GSM850		0.076	0.08
	GSM1900		0.076	0.08
	WCDMA V		0.076	0.08
	WCDMA IV		0.076	0.08
Bottom Side	WCDMA II		0.076	0.08
	LTE Band 17		0.076	0.08
	LTE Band 4		0.076	0.08
	LTE Band 7		0.076	0.08
	LTE Band 2		0.076	0.08
	GSM850	0.076		0.08
	GSM1900	0.512		0.51
	WCDMA V	0.079		0.08
	WCDMA IV	0.561		0.56
	WCDMA II	0.700		0.70
	LTE Band 17	0.016		0.02
	LTE Band 4	0.514		0.51
	LTE Band 7	0.515		0.52
	LTE Band 2	0.662		0.66

14.3 Body-Worn Exposure Conditions

<WWAN + WLAN2.4GHz Band>

Position	WWAN		WLAN	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	1g SAR (W/kg)	
Front	GSM850	0.524	0.081	0.61
	GSM1900	0.616	0.081	0.70
	WCDMA V	0.570	0.081	0.65
	WCDMA IV	1.085	0.081	1.17
	WCDMA II	1.103	0.081	1.18
	LTE Band 17	0.186	0.081	0.27
	LTE Band 4	0.788	0.081	0.87
	LTE Band 7	0.754	0.081	0.84
	LTE Band 2	0.743	0.081	0.82
Back	GSM850	0.549	0.085	0.63
	GSM1900	0.798	0.085	0.88
	WCDMA V	0.539	0.085	0.62
	WCDMA IV	1.117	0.085	1.20
	WCDMA II	1.222	0.085	1.31
	LTE Band 17	0.220	0.085	0.31
	LTE Band 4	0.879	0.085	0.96
	LTE Band 7	0.953	0.085	1.04
	LTE Band 2	1.012	0.085	1.10
Front (w/ Headset)	WCDMA II	1.294	0.075	1.37
Back (w/ Headset)	WCDMA II	1.233	0.074	1.31

Position	WWAN		WLAN	Summed 10g SAR (W/kg)
	WWAN Band	10g SAR (W/kg)	10g SAR (W/kg)	
Front	GSM850	0.405	0.046	0.45
	GSM1900	0.350	0.046	0.40
	WCDMA V	0.419	0.046	0.47
	WCDMA IV	0.627	0.046	0.67
	WCDMA II	0.630	0.046	0.68
	LTE Band 17	0.147	0.046	0.19
	LTE Band 4	0.459	0.046	0.51
	LTE Band 7	0.430	0.046	0.48
	LTE Band 2	0.437	0.046	0.48
Back	GSM850	0.425	0.047	0.47
	GSM1900	0.440	0.047	0.49
	WCDMA V	0.417	0.047	0.46
	WCDMA IV	0.658	0.047	0.71
	WCDMA II	0.703	0.047	0.75
	LTE Band 17	0.173	0.047	0.22
	LTE Band 4	0.516	0.047	0.56
	LTE Band 7	0.526	0.047	0.57
	LTE Band 2	0.584	0.047	0.63
Front (w/ Headset)	WCDMA II	0.735	0.041	0.78
Back (w/ Headset)	WCDMA II	0.702	0.038	0.74



<WWAN + WLAN5.2GHz Band>

Position	WWAN		WLAN	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	1g SAR (W/kg)	
Front	GSM850	0.524	0.001	0.53
	GSM1900	0.616	0.001	0.62
	WCDMA V	0.570	0.001	0.57
	WCDMA IV	1.085	0.001	1.09
	WCDMA II	1.103	0.001	1.10
	LTE Band 17	0.186	0.001	0.19
	LTE Band 4	0.788	0.001	0.79
	LTE Band 7	0.754	0.001	0.76
Back	LTE Band 2	0.743	0.001	0.74
	GSM850	0.549	0.083	0.63
	GSM1900	0.798	0.083	0.88
	WCDMA V	0.539	0.083	0.62
	WCDMA IV	1.117	0.083	1.20
	WCDMA II	1.222	0.083	1.31
	LTE Band 17	0.220	0.083	0.30
	LTE Band 4	0.879	0.083	0.96
Front (w/ Headset)	LTE Band 7	0.953	0.083	1.04
	LTE Band 2	1.012	0.083	1.10
Back (w/ Headset)	WCDMA II	1.233	0.067	1.30

Position	WWAN		WLAN	Summed 10g SAR (W/kg)
	WWAN Band	10g SAR (W/kg)	10g SAR (W/kg)	
Front	GSM850	0.405	0.001	0.41
	GSM1900	0.350	0.001	0.35
	WCDMA V	0.419	0.001	0.42
	WCDMA IV	0.627	0.001	0.63
	WCDMA II	0.630	0.001	0.63
	LTE Band 17	0.147	0.001	0.15
	LTE Band 4	0.459	0.001	0.46
	LTE Band 7	0.430	0.001	0.43
Back	LTE Band 2	0.437	0.001	0.44
	GSM850	0.425	0.031	0.46
	GSM1900	0.440	0.031	0.47
	WCDMA V	0.417	0.031	0.45
	WCDMA IV	0.658	0.031	0.69
	WCDMA II	0.703	0.031	0.73
	LTE Band 17	0.173	0.031	0.20
	LTE Band 4	0.516	0.031	0.55
Front (w/ Headset)	LTE Band 7	0.526	0.031	0.56
	LTE Band 2	0.584	0.031	0.62
Back (w/ Headset)	WCDMA II	0.702	0.019	0.72

<WWAN + WLAN5.3GHz Band>

Position	WWAN		WLAN	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	1g SAR (W/kg)	
Front	GSM850	0.524	0.001	0.53
	GSM1900	0.616	0.001	0.62
	WCDMA V	0.570	0.001	0.57
	WCDMA IV	1.085	0.001	1.09
	WCDMA II	1.103	0.001	1.10
	LTE Band 17	0.186	0.001	0.19
	LTE Band 4	0.788	0.001	0.79
	LTE Band 7	0.754	0.001	0.76
Back	LTE Band 2	0.743	0.001	0.74
	GSM850	0.549	0.093	0.64
	GSM1900	0.798	0.093	0.89
	WCDMA V	0.539	0.093	0.63
	WCDMA IV	1.117	0.093	1.21
	WCDMA II	1.222	0.093	1.32
	LTE Band 17	0.220	0.093	0.31
	LTE Band 4	0.879	0.093	0.97
Front (w/ Headset)	LTE Band 7	0.953	0.093	1.05
	LTE Band 2	1.012	0.093	1.11
Back (w/ Headset)	WCDMA II	1.294	0.001	1.30
		1.233	0.082	1.32

Position	WWAN		WLAN	Summed 10g SAR (W/kg)
	WWAN Band	10g SAR (W/kg)	10g SAR (W/kg)	
Front	GSM850	0.405	0.001	0.41
	GSM1900	0.350	0.001	0.35
	WCDMA V	0.419	0.001	0.42
	WCDMA IV	0.627	0.001	0.63
	WCDMA II	0.630	0.001	0.63
	LTE Band 17	0.147	0.001	0.15
	LTE Band 4	0.459	0.001	0.46
	LTE Band 7	0.430	0.001	0.43
Back	LTE Band 2	0.437	0.001	0.44
	GSM850	0.425	0.033	0.46
	GSM1900	0.440	0.033	0.47
	WCDMA V	0.417	0.033	0.45
	WCDMA IV	0.658	0.033	0.69
	WCDMA II	0.703	0.033	0.74
	LTE Band 17	0.173	0.033	0.21
	LTE Band 4	0.516	0.033	0.55
Front (w/ Headset)	LTE Band 7	0.526	0.033	0.56
	LTE Band 2	0.584	0.033	0.62
Back (w/ Headset)	WCDMA II	0.735	0.001	0.74
		0.702	0.022	0.72



<WWAN + WLAN5.5GHz Band>

Position	WWAN		WLAN	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	1g SAR (W/kg)	
Front	GSM850	0.524	0.001	0.53
	GSM1900	0.616	0.001	0.62
	WCDMA V	0.570	0.001	0.57
	WCDMA IV	1.085	0.001	1.09
	WCDMA II	1.103	0.001	1.10
	LTE Band 17	0.186	0.001	0.19
	LTE Band 4	0.788	0.001	0.79
	LTE Band 7	0.754	0.001	0.76
Back	LTE Band 2	0.743	0.001	0.74
	GSM850	0.549	0.069	0.62
	GSM1900	0.798	0.069	0.87
	WCDMA V	0.539	0.069	0.61
	WCDMA IV	1.117	0.069	1.19
	WCDMA II	1.222	0.069	1.29
	LTE Band 17	0.220	0.069	0.29
	LTE Band 4	0.879	0.069	0.95
Front (w/ Headset)	LTE Band 7	0.953	0.069	1.02
	LTE Band 2	1.012	0.069	1.08
Back (w/ Headset)	WCDMA II	1.233	0.099	1.33

Position	WWAN		WLAN	Summed 10g SAR (W/kg)
	WWAN Band	10g SAR (W/kg)	10g SAR (W/kg)	
Front	GSM850	0.405	0.001	0.41
	GSM1900	0.350	0.001	0.35
	WCDMA V	0.419	0.001	0.42
	WCDMA IV	0.627	0.001	0.63
	WCDMA II	0.630	0.001	0.63
	LTE Band 17	0.147	0.001	0.15
	LTE Band 4	0.459	0.001	0.46
	LTE Band 7	0.430	0.001	0.43
Back	LTE Band 2	0.437	0.001	0.44
	GSM850	0.425	0.025	0.45
	GSM1900	0.440	0.025	0.47
	WCDMA V	0.417	0.025	0.44
	WCDMA IV	0.658	0.025	0.68
	WCDMA II	0.703	0.025	0.73
	LTE Band 17	0.173	0.025	0.20
	LTE Band 4	0.516	0.025	0.54
Front (w/ Headset)	LTE Band 7	0.526	0.025	0.55
	LTE Band 2	0.584	0.025	0.61
Back (w/ Headset)	WCDMA II	0.702	0.031	0.73



<WWAN + WLAN5.8GHz Band>

Position	WWAN		WLAN	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	1g SAR (W/kg)	
Front	GSM850	0.524	0.001	0.53
	GSM1900	0.616	0.001	0.62
	WCDMA V	0.570	0.001	0.57
	WCDMA IV	1.085	0.001	1.09
	WCDMA II	1.103	0.001	1.10
	LTE Band 17	0.186	0.001	0.19
	LTE Band 4	0.788	0.001	0.79
	LTE Band 7	0.754	0.001	0.76
Back	LTE Band 2	0.743	0.001	0.74
	GSM850	0.549	0.067	0.62
	GSM1900	0.798	0.067	0.87
	WCDMA V	0.539	0.067	0.61
	WCDMA IV	1.117	0.067	1.18
	WCDMA II	1.222	0.067	1.29
	LTE Band 17	0.220	0.067	0.29
	LTE Band 4	0.879	0.067	0.95
Front (w/ Headset)	LTE Band 7	0.953	0.067	1.02
	LTE Band 2	1.012	0.067	1.08
Back (w/ Headset)	WCDMA II	1.233	0.111	1.34

Position	WWAN		WLAN	Summed 10g SAR (W/kg)
	WWAN Band	10g SAR (W/kg)	10g SAR (W/kg)	
Front	GSM850	0.405	0.001	0.41
	GSM1900	0.350	0.001	0.35
	WCDMA V	0.419	0.001	0.42
	WCDMA IV	0.627	0.001	0.63
	WCDMA II	0.630	0.001	0.63
	LTE Band 17	0.147	0.001	0.15
	LTE Band 4	0.459	0.001	0.46
	LTE Band 7	0.430	0.001	0.43
Back	LTE Band 2	0.437	0.001	0.44
	GSM850	0.425	0.026	0.45
	GSM1900	0.440	0.026	0.47
	WCDMA V	0.417	0.026	0.44
	WCDMA IV	0.658	0.026	0.68
	WCDMA II	0.703	0.026	0.73
	LTE Band 17	0.173	0.026	0.20
	LTE Band 4	0.516	0.026	0.54
Front (w/ Headset)	LTE Band 7	0.526	0.026	0.55
	LTE Band 2	0.584	0.026	0.61
Back (w/ Headset)	WCDMA II	0.702	0.037	0.74



<WWAN + Bluetooth>

Position	WWAN		Bluetooth	Summed 1g SAR (W/kg)
	WWAN Band	1g SAR (W/kg)	Estimated 1g SAR (W/kg)	
Front	GSM850	0.524	0.126	0.65
	GSM1900	0.616	0.126	0.74
	WCDMA V	0.570	0.126	0.70
	WCDMA IV	1.085	0.126	1.21
	WCDMA II	1.103	0.126	1.23
	LTE Band 17	0.186	0.126	0.31
	LTE Band 4	0.788	0.126	0.91
	LTE Band 7	0.754	0.126	0.88
Back	LTE Band 2	0.743	0.126	0.87
	GSM850	0.549	0.126	0.68
	GSM1900	0.798	0.126	0.92
	WCDMA V	0.539	0.126	0.67
	WCDMA IV	1.117	0.126	1.24
	WCDMA II	1.222	0.126	1.35
	LTE Band 17	0.220	0.126	0.35
	LTE Band 4	0.879	0.126	1.01
Front (w/ Headset)	LTE Band 7	0.953	0.126	1.08
	LTE Band 2	1.012	0.126	1.14
Back (w/ Headset)	WCDMA II	1.294	0.126	1.42
		1.233	0.126	1.36

Position	WWAN		Bluetooth	Summed 10g SAR (W/kg)
	WWAN Band	10g SAR (W/kg)	Estimated 10g SAR (W/kg)	
Front	GSM850	0.405	0.050	0.46
	GSM1900	0.350	0.050	0.40
	WCDMA V	0.419	0.050	0.47
	WCDMA IV	0.627	0.050	0.68
	WCDMA II	0.630	0.050	0.68
	LTE Band 17	0.147	0.050	0.20
	LTE Band 4	0.459	0.050	0.51
	LTE Band 7	0.430	0.050	0.48
Back	LTE Band 2	0.437	0.050	0.49
	GSM850	0.425	0.050	0.48
	GSM1900	0.440	0.050	0.49
	WCDMA V	0.417	0.050	0.47
	WCDMA IV	0.658	0.050	0.71
	WCDMA II	0.703	0.050	0.75
	LTE Band 17	0.173	0.050	0.22
	LTE Band 4	0.516	0.050	0.57
Front (w/ Headset)	LTE Band 7	0.526	0.050	0.58
	LTE Band 2	0.584	0.050	0.63
Back (w/ Headset)	WCDMA II	0.735	0.050	0.79
		0.702	0.050	0.75

Test Engineer : Iran Wang, Mood Huang, Frank Wu, Tom Jiang, San Lin, Nick Yu, Bevis Chang

Domo Hsiao, and Angelo Chang

15. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 14.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 15.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 15.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.55	Normal	1	1	1	± 6.55 %	± 6.55 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	2.0	Rectangular	√3	1	1	± 1.2 %	± 1.2 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Probe Positioning	9.9	Rectangular	√3	1	1	± 5.7 %	± 5.7 %
Max. SAR Eval.	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 12.8 %	± 12.6 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 25.6 %	± 25.2 %

Table 15.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz



16. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 648474 D04 v01r01r02, "SAR Evaluation Considerations for Wireless Handsets", Dec 2013
- [8] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [9] FCC KDB 941225 D04 v01, "Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode", January 2010
- [10] FCC KDB 941225 D05 v02r03, "SAR Evaluation Considerations for LTE Devices", Dec 2013
- [11] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [12] FCC KDB 941225 D02 v02r02, "SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced", May 2013.
- [13] FCC KDB 941225 D06 v01r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", May 2013
- [14] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.