



# TEST REPORT

**Test Report No. : UL-RPT-RP10295085JD04C V2.0**

**Manufacturer** : Sony Mobile Communications Inc.

**FCC ID** : PY7PM-0800

**Technology.** : LTE – Band 4

**Test Standard(s)** : FCC Part 27.53(g)(1)

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 2.0 supersedes all previous versions.

**Date of Issue:** 01 August 2014

**Checked by:**

Sarah Williams  
Engineer, Radio Laboratory

**Issued by :**

pp

John Newell  
Group Quality Manager,  
Basingstoke,  
UL VS LTD



This laboratory is accredited by UKAS.  
The tests reported herein have been  
performed in accordance with its' terms  
of accreditation.

---

## UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK  
Telephone: +44 (0)1256 312000  
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

**Table of Contents**

<b>1. Customer Information.....</b>	<b>4</b>
<b>2. Summary of Testing.....</b>	<b>5</b>
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
<b>3. Equipment Under Test (EUT) .....</b>	<b>6</b>
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	7
3.5. Support Equipment	8
<b>4. Operation and Monitoring of the EUT during Testing .....</b>	<b>9</b>
4.1. Operating Modes	9
4.2. Configuration and Peripherals	9
<b>5. Measurements, Examinations and Derived Results.....</b>	<b>10</b>
5.1. General Comments	10
5.2. Test Results	11
5.2.1. Transmitter Radiated Spurious Emissions	11
5.2.2. Transmitter Radiated Emissions at Band Edges	15
<b>6. Measurement Uncertainty .....</b>	<b>28</b>
<b>7. Report Revision History .....</b>	<b>29</b>

**1. Customer Information**

<b>Company Name:</b>	Sony Mobile Communications Inc.
<b>Address:</b>	Nya Vattentornet Mobilvägen 10 Lund 22188 Sweden

## **2. Summary of Testing**

### **2.1. General Information**

<b>Specification Reference:</b>	47CFR27
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications): Part 27 Subpart C (Miscellaneous Wireless Communication Services)
<b>Site Registration:</b>	209735
<b>Location of Testing:</b>	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
<b>Test Dates:</b>	04 June 2014 to 06 June 2014

### **2.2. Summary of Test Results**

<b>FCC Reference (47CFR)</b>	<b>Measurement</b>	<b>Result</b>
2.1053 / 27.53(g)(1)	Transmitter Radiated Spurious Emissions	
2.1053 / 27.53(g)(1)	Transmitter Radiated Emissions at Band Edges	
Key to Results  = Complied  = Did not comply		

### **2.3. Methods and Procedures**

<b>Reference:</b>	ANSI/TIA-603-C-2004
<b>Title:</b>	Land Mobile Communications Equipment, Measurements and performance Standards
<b>Reference:</b>	FCC KDB 971168 D01 v02r01, 7 June 2013
<b>Title:</b>	Measurement Guidance for Certification of Licensed Digital Transmitters

### **2.4. Deviations from the Test Specification**

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT)**

<b>Brand Name:</b>	Sony
<b>IMEI:</b>	004402452705555 ( <i>Radiated sample</i> )
<b>Test Sample Serial Number:</b>	CB5A1YYLUK
<b>Hardware Version Number:</b>	A
<b>Software Version Number:</b>	23.0.A.0.204
<b>FCC ID:</b>	PY7PM-0800

<b>Brand Name:</b>	Sony
<b>Description:</b>	AC Charger
<b>Model Name or Number:</b>	EP880

<b>Brand Name:</b>	Generic
<b>Description:</b>	MHL Cable
<b>Model Name or Number:</b>	Not marked

<b>Brand Name:</b>	Sony
<b>Description:</b>	MHL Adaptor
<b>Model Name or Number:</b>	IM750

<b>Brand Name:</b>	Sony
<b>Description:</b>	USB Cable
<b>Model Name or Number:</b>	EC803

<b>Brand Name:</b>	Sony
<b>Description:</b>	Deskstand
<b>Model Name or Number:</b>	DK43

<b>Brand Name:</b>	Sony
<b>Description:</b>	PHF
<b>Model Name or Number:</b>	MH410c

### **3.2. Description of EUT**

The equipment under test (EUT) was a GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac + NFC & ANT+.

### **3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

### **3.4. Additional Information Related to Testing**

<b>Tested Technology:</b>	LTE Band 4		
<b>Type of Equipment</b>	Transceiver		
<b>Channel Bandwidth(s):</b>	1.4, 3, 5, 10, 15 & 20 MHz		
<b>Modulation Type:</b>	QPSK & 16QAM		
<b>Duty Cycle:</b>	100%		
<b>Power Supply Requirement:</b>	Nominal	3.8 VDC	
<b>Transmit Frequency Range:</b>	1710 MHz to 1755 MHz		
<b>Channels Tested:</b>	<b>Channel Bandwidth</b>	<b>N<sub>ul</sub></b>	<b>Frequency of Uplink (MHz)</b>
<b>Bottom Channel</b>	1.4	19957	1710.7
	3	19965	1711.5
	5	19975	1712.5
	10	20000	1715.0
	15	20025	1717.5
	20	20050	1720.0
<b>Top Channel</b>	1.4	20393	1754.3
	3	20385	1753.5
	5	20375	1752.5
	10	20350	1750.0
	15	20325	1747.5
	20	20300	1745.0

**3.5. Support Equipment**

The following support equipment was used to exercise the EUT during testing:

<b>Description:</b>	2 GB Micro SD Card
<b>Brand Name:</b>	Generic
<b>Model Name or Number:</b>	Not marked

<b>Description:</b>	22" High Definition Television
<b>Brand Name:</b>	Logik
<b>Model Name or Number:</b>	L22FE12A
<b>Serial Number:</b>	1309020661

## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

- Transmit Mode – The EUT was set to transmit with maximum output power using the required channel bandwidth, modulation and resource blocks setting.

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration(s):

- The EUT was connected to a Rohde and Schwarz CMW500 LTE system simulator, operating in a transceiver mode.
- Transmitter radiated spurious emission tests were performed with the following configurations, employing all available accessories:
  - Configuration 1 – Handset with the AC charger, USB Cable, MHL cable (terminated in to a television), MHL adaptor and PHF.
  - Configuration 2 – Handset with the AC charger, USB Cable, Deskstand and PHF.

Pre-scans below 1 GHz were performed in both configurations 1 and 2, with final measurements limited to the configuration which provided worst case results. Pre-scans above 1 GHz were performed in the configuration that employed the most accessories (Configuration 1), with any final measurements being performed in both configurations.

- Transmitter radiated spurious emissions tests were performed with the EUT set to transmit with a 10 MHz channel bandwidth with QPSK modulation applied and 1 resource block with 0 offset. This was found to be the worst case modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest transmit output power level, it was deemed to be the worst case.
- Transmitter Radiated Band Edge Emissions was tested on all supported channel bandwidths using QPSK and 16QAM modulations with the maximum resource blocks settings.

## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6* for Measurement Uncertainty details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

## **5.2. Test Results**

### **5.2.1. Transmitter Radiated Spurious Emissions**

#### **Test Summary:**

<b>Test Engineers:</b>	Andrew Edwards & David Doyle	<b>Test Dates:</b>	04 June 2014 to 06 June 2014
<b>Test Sample IMEI:</b>	004402452705555		

<b>FCC Reference:</b>	Parts 2.1053 & 27.53(g)(1)
<b>Test Method Used:</b>	As detailed in KDB 971168 Section 6.1 referencing FCC Part 2.1053
<b>Frequency Range:</b>	30 MHz to 18 GHz
<b>Configuration:</b>	10 MHz, QPSK, 1RB, 0 Offset

#### **Environmental Conditions:**

<b>Temperature (°C):</b>	24 to 25
<b>Relative Humidity (%):</b>	32 to 41





#### **Note(s):**

1. The EUT was set to transmit with a 10 MHz channel bandwidth with QPSK modulation applied and 1 resource block with 0 offset, as this was found to be the worst case modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest transmit output power level, it was deemed to be the worst case.
2. The emission seen on the 1 GHz to 3 GHz plot at approximately 1750 MHz is the EUT carrier.
3. All emissions shown on the pre-scan plots were investigated. Final measurements were made using appropriate RF filters and attenuators where required. All emissions shown on the pre-scan plots were found to be below the measurement system noise floor or ambient, therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below.
4. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
5. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.




#### **Results: Top Channel**

<b>Frequency (MHz)</b>	<b>Antenna Polarisation</b>	<b>Emission Level (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>	<b>Result</b>
2653.846	Vertical	-30.2	-13.0	17.2	Complied

### Transmitter Out of Band Radiated Emissions (continued)

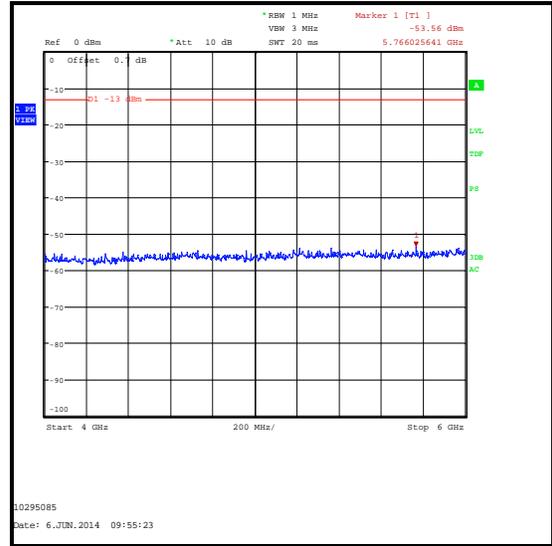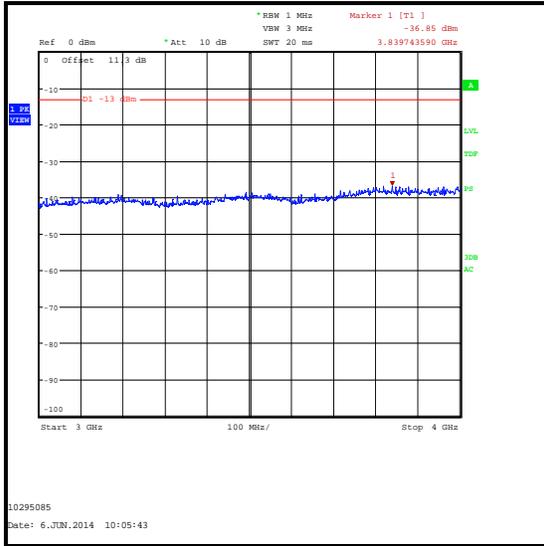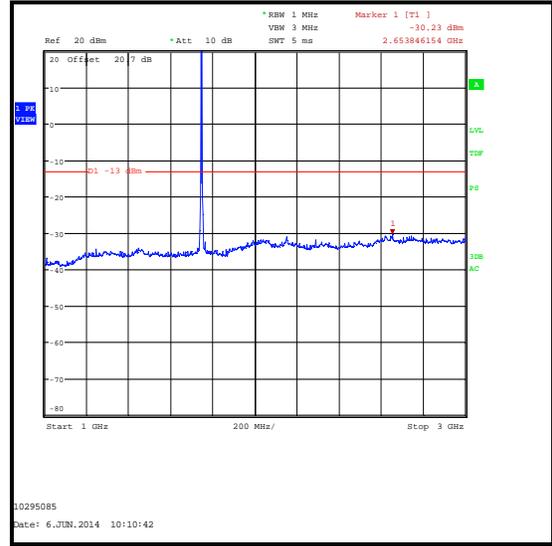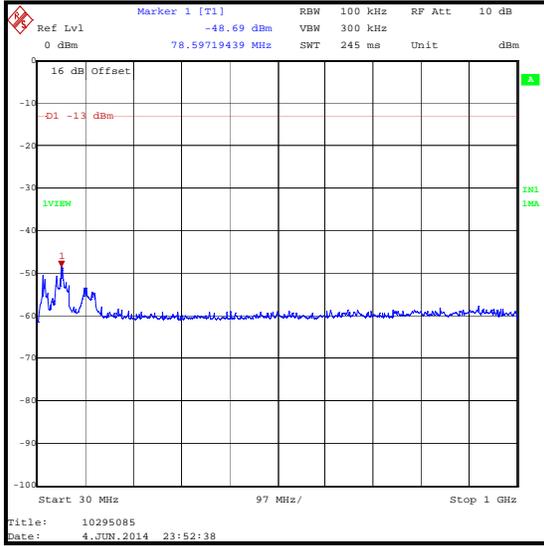

**Transmitter Out of Band Radiated Emissions (continued)**

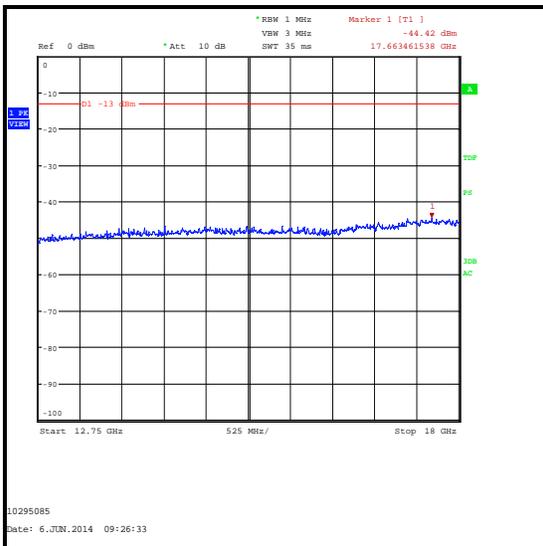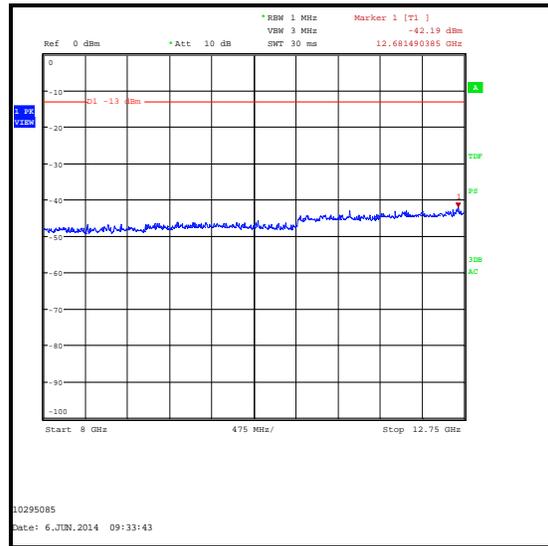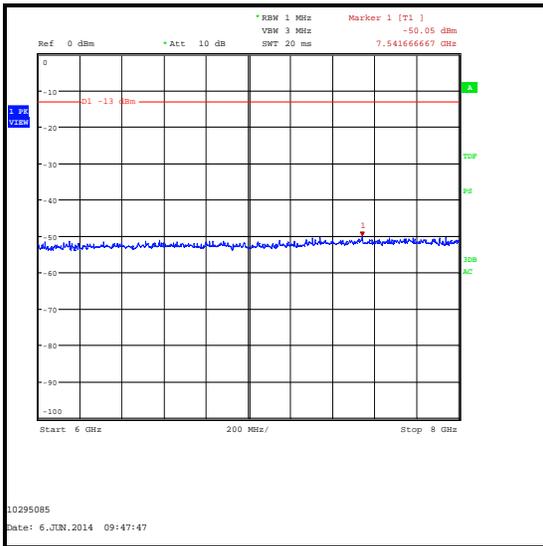

**Transmitter Out of Band Radiated Emissions (continued)****Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A490	Antenna	Chase	CBL6111A	1590	29 Apr 2015	12
A1834	Attenuator	Hewlett Packard	8491B	10444	15 Nov 2014	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	26 Nov 2014	12
G0543	Amplifier	Sonoma	310N	230801	19 Aug 2014	3
M1622	Thermohygrometer	JM Handelspunkt	30.5015.06	None stated	31 Dec 2014	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	15 Feb 2015	12
A253	Antenna	Flann Microwave	12240-20	128	14 Nov 2014	12
A254	Antenna	Flann Microwave	14240-20	139	14 Nov 2014	12
A255	Antenna	Flann Microwave	16240-20	519	14 Nov 2014	12
A256	Antenna	Flann Microwave	18240-20	400	14 Nov 2014	12
A1534	Pre-Amplifier	Hewlett Packard	8449B	3008A00405	18 May 2015	12
A1818	Antenna	EMCO	3115	00075692	14 Nov 2014	12
A1393	Attenuator	Huber & Suhner	6820.17.B	757456	02 May 2015	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	02 May 2015	12
A1975	High Pass Filter	AtlanTecRF	AFH-03000	090424010	12 Apr 2015	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	14 Nov 2014	12
M1874	Test Receiver	Rohde & Schwarz	ESU26	100553	13 May 2015	12
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	Not stated	14 Mar 2015	12

**5.2.2. Transmitter Radiated Emissions at Band Edges****Test Summary:**

<b>Test Engineer:</b>	David Doyle	<b>Test Date:</b>	06 June 2014
<b>Test Sample IMEI:</b>	004402452705555		

<b>FCC Reference:</b>	Parts 2.1053 & 27.53(g)(1)
<b>Test Method Used:</b>	As detailed in KDB 971168 Section 6.1 referencing FCC Part 27.53

**Environmental Conditions:**

<b>Temperature (°C):</b>	23
<b>Relative Humidity (%):</b>	41


**Note(s):**

1. Measurements were performed with the EUT transmitting with QPSK and 16QAM modulation schemes, with the maximum resource blocks settings.


**Transmitter Radiated Emissions at Band Edges (continued)**

**Results: 1.4 MHz Channel Bandwidth / QPSK**

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1710	6	0	-16.5	-13.0	3.5	Complied
1755	6	0	-19.4	-13.0	6.4	Complied

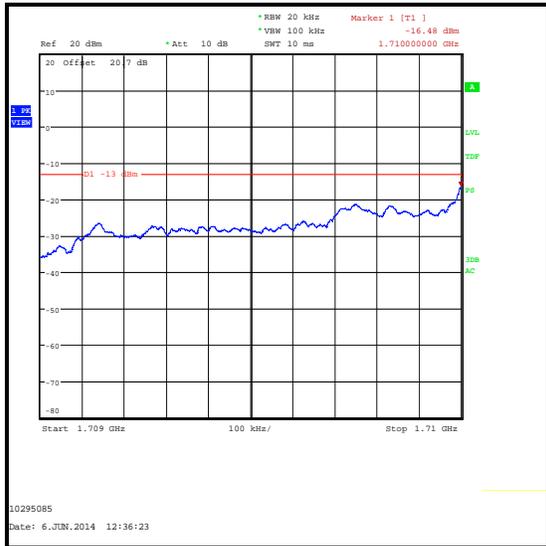

**QPSK / Lower Band Edge**

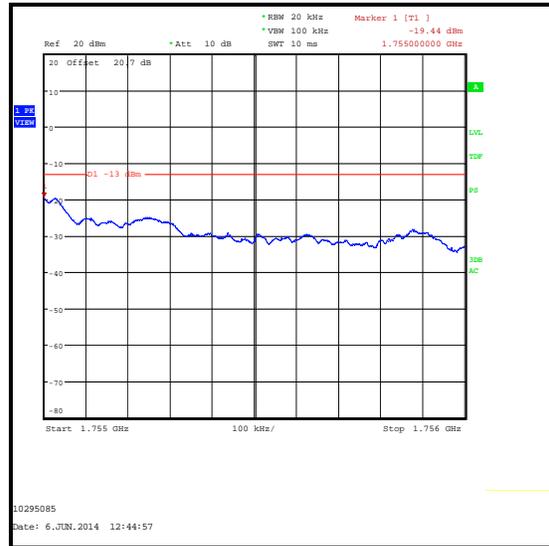


**QPSK / Upper Band Edge**


**Transmitter Radiated Emissions at Band Edges (continued)**

**Results: 1.4 MHz Channel Bandwidth / 16QAM**

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1710	6	0	-18.4	-13.0	5.4	Complied
1755	6	0	-17.5	-13.0	4.5	Complied

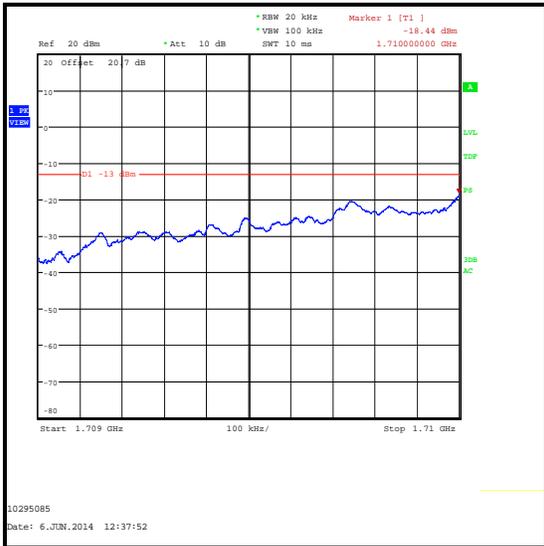

**16QAM / Lower Band Edge**

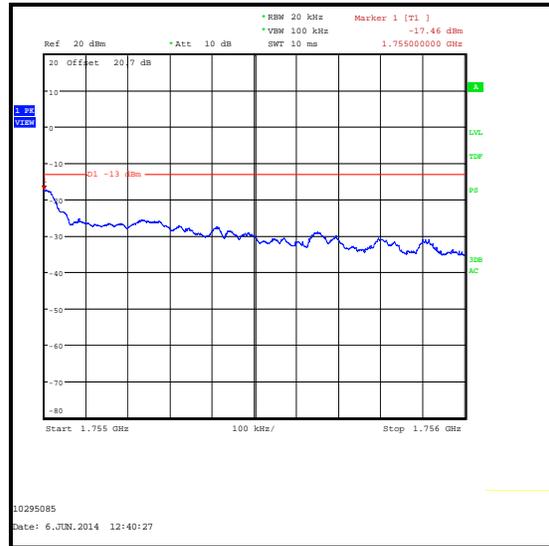


**16QAM / Upper Band Edge**


**Transmitter Radiated Emissions at Band Edges (continued)**

**Results: 3 MHz Channel Bandwidth / QPSK**

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1710	15	0	-15.2	-13.0	2.2	Complied
1755	15	0	-16.0	-13.0	3.0	Complied

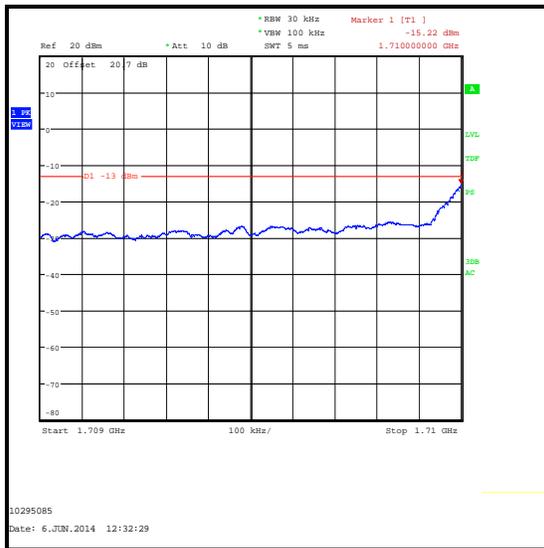

**QPSK / Lower Band Edge**

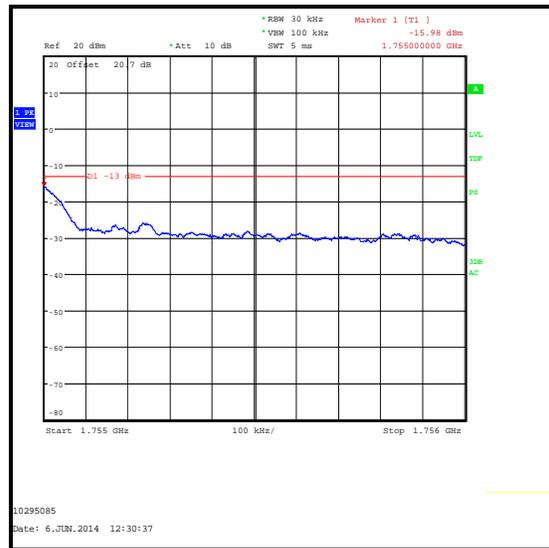


**QPSK / Upper Band Edge**


**Transmitter Radiated Emissions at Band Edges (continued)**

**Results: 3 MHz Channel Bandwidth / 16QAM**

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1710	15	0	-15.7	-13.0	2.7	Complied
1755	15	0	-16.8	-13.0	3.8	Complied

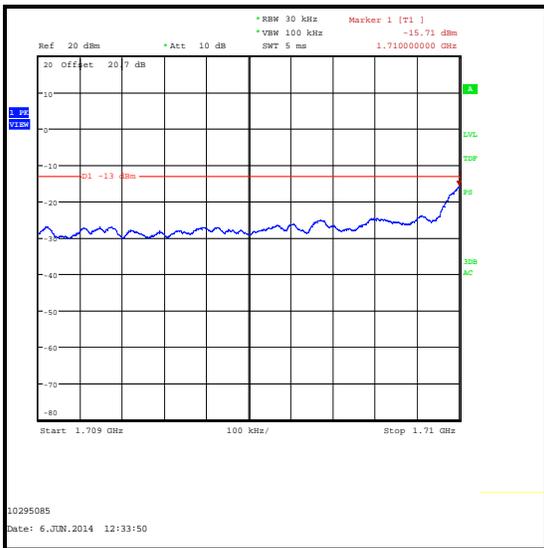

**16QAM / Lower Band Edge**

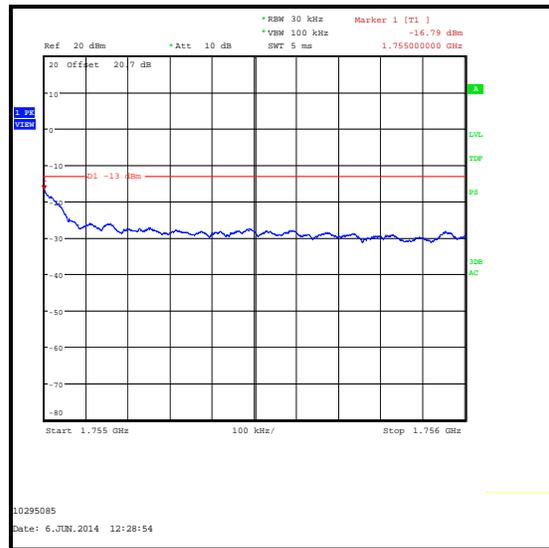


**16QAM / Upper Band Edge**


**Transmitter Radiated Emissions at Band Edges (continued)**

**Results: 5 MHz Channel Bandwidth / QPSK**

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1710	25	0	-14.5	-13.0	1.5	Complied
1755	25	0	-16.5	-13.0	3.5	Complied

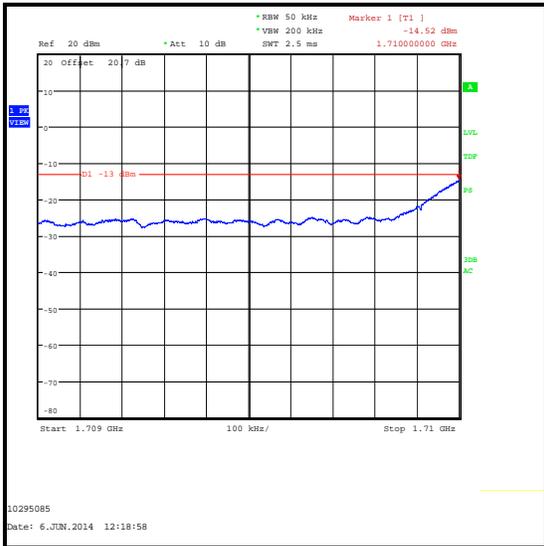

**QPSK / Lower Band Edge**

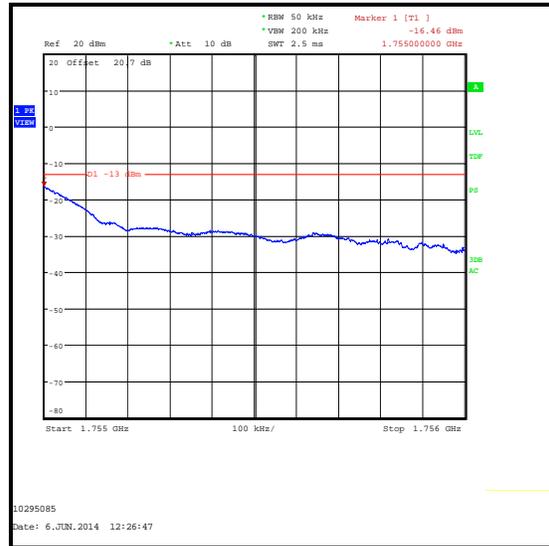


**QPSK / Upper Band Edge**


**Transmitter Radiated Emissions at Band Edges (continued)**

**Results: 5 MHz Channel Bandwidth / 16QAM**

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1710	25	0	-16.1	-13.0	3.1	Complied
1755	25	0	-16.0	-13.0	3.0	Complied

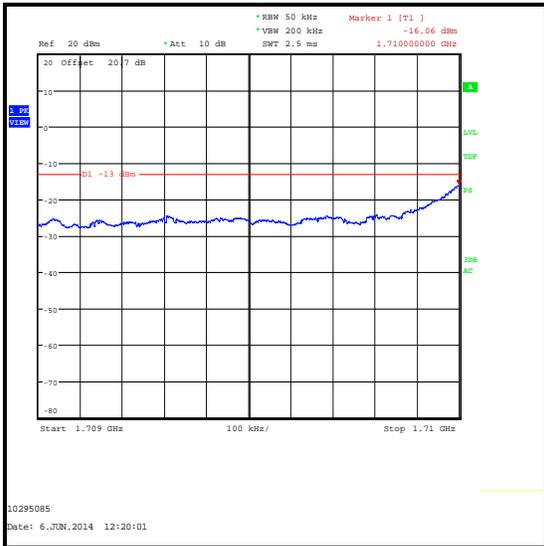

**16QAM / Lower Band Edge**

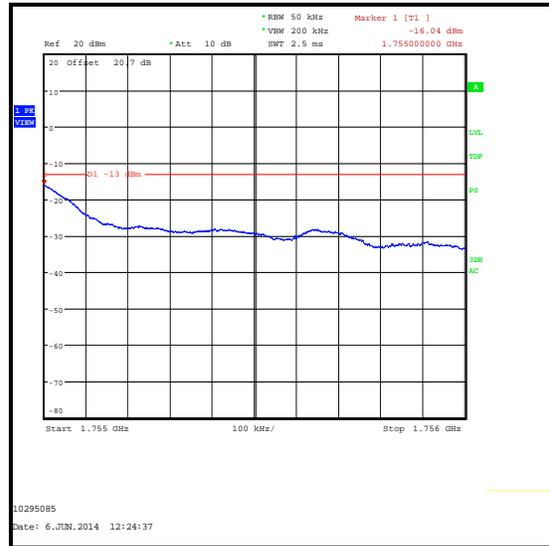

**16QAM / Upper Band Edge**

**Transmitter Radiated Emissions at Band Edges (continued)**

**Results: 10 MHz Channel Bandwidth / QPSK**

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1710	50	0	-16.5	-13.0	3.5	Complied
1755	50	0	-16.8	-13.0	3.8	Complied



**QPSK / Lower Band Edge**




**QPSK / Upper Band Edge**

**Transmitter Radiated Emissions at Band Edges (continued)**

**Results: 10 MHz Channel Bandwidth / 16QAM**

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1710	50	0	-18.0	-13.0	5.0	Complied
1755	50	0	-19.8	-13.0	6.8	Complied

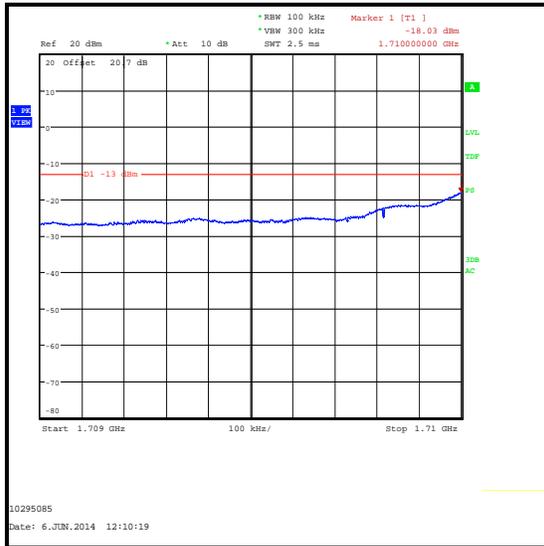

**16QAM / Lower Band Edge**



**16QAM / Upper Band Edge**

**Transmitter Radiated Emissions at Band Edges (continued)**

**Results: 15 MHz Channel Bandwidth / QPSK**

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1710	75	0	-15.4	-13.0	2.4	Complied
1755	75	0	-15.2	-13.0	2.2	Complied



**QPSK / Lower Band Edge**




**QPSK / Upper Band Edge**

**Transmitter Radiated Emissions at Band Edges (continued)**

**Results: 15 MHz Channel Bandwidth / 16QAM**

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1710	75	0	-15.5	-13.0	2.5	Complied
1755	75	0	-16.2	-13.0	3.2	Complied

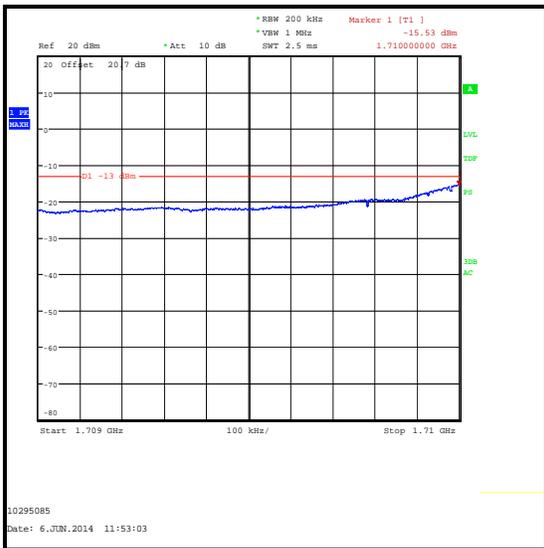

**16QAM / Lower Band Edge**



**16QAM / Upper Band Edge**


**Transmitter Radiated Emissions at Band Edges (continued)**

**Results: 20 MHz Channel Bandwidth / QPSK**

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1710	100	0	-19.3	-13.0	6.3	Complied
1755	100	0	-20.9	-13.0	7.9	Complied



**QPSK / Lower Band Edge**

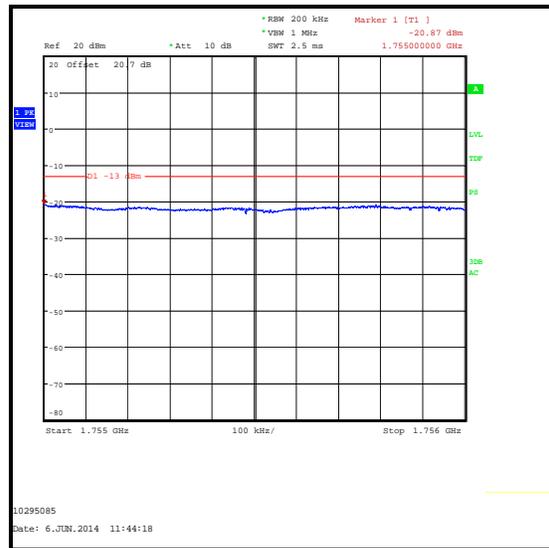


**QPSK / Upper Band Edge**


**Transmitter Radiated Emissions at Band Edges (continued)**

**Results: 20 MHz Channel Bandwidth / 16QAM**

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1709.720	100	0	-20.0	-13.0	7.0	Complied
1710	100	0	-20.3	-13.0	7.3	Complied
1755	100	0	-20.2	-13.0	7.2	Complied

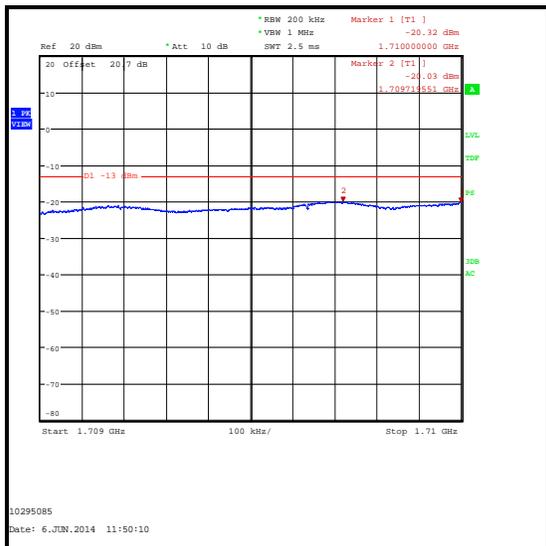

16QAM / Lower Band Edge

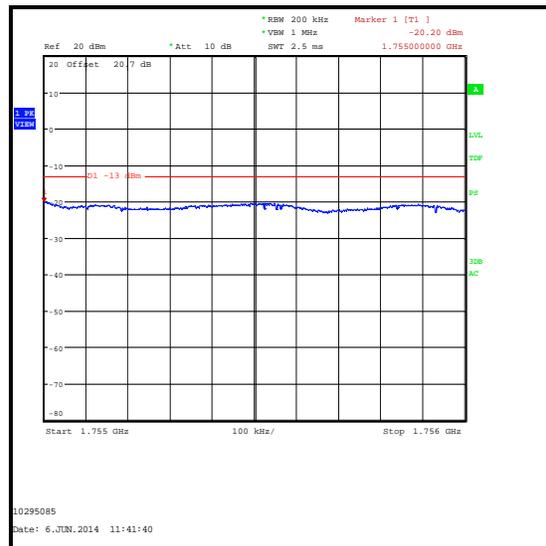

16QAM / Upper Band Edge

**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A1534	Pre-Amplifier	Hewlett Packard	8449B	3008A00405	18 May 2015	12
A1818	Antenna	EMCO	3115	00075692	14 Nov 2014	12
A1393	Attenuator	Huber & Suhner	6820.17B	757456	02 May 2015	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	14 Nov 2014	12
M1874	Test Receiver	Rohde & Schwarz	ESU26	100553	13 May 2015	12
M1656	Thermohygrometer	JM Handlungspunkt	30.5015.13	Not stated	14 Mar 2015	12

## **6. Measurement Uncertainty**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

<b>Measurement Type</b>	<b>Range</b>	<b>Confidence Level (%)</b>	<b>Calculated Uncertainty</b>
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±5.65 dB
Radiated Spurious Emissions	1 GHz to 18 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## **7. Report Revision History**

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version
2.0	-	-	EUT Description update

--- END OF REPORT ---