



# TEST REPORT

**Test Report No. : UL-RPT-RP10295085JD01A V2.0**

**Manufacturer** : Sony Mobile Communications Inc.

**FCC ID** : PY7PM-0800

**Test Standard(s)** : FCC Parts 15.107 & 15.109

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 2.0 supersedes all previous versions.

**Date of Issue:** 01 August 2014

**Checked by:**

Steven White  
Project Lead, Radio Laboratory

**Issued by :**

pp

John Newell  
Group Quality Manager  
Basingstoke,  
UL VS LTD



This laboratory is accredited by UKAS.  
The tests reported herein have been  
performed in accordance with its' terms  
of accreditation.

---

**UL VS LTD**

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK  
Telephone: +44 (0)1256 312000  
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

---

## **Table of Contents**

<b>1. Customer Information.....</b>	<b>4</b>
<b>2. Summary of Testing.....</b>	<b>5</b>
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
<b>3. Equipment Under Test (EUT) .....</b>	<b>6</b>
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	7
3.5. Support Equipment	7
<b>4. Operation and Monitoring of the EUT during Testing .....</b>	<b>8</b>
4.1. Operating Modes	8
4.2. Configuration and Peripherals	8
<b>5. Measurements, Examinations and Derived Results.....</b>	<b>9</b>
5.1. General Comments	9
5.2. Test Results	10
5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions	10
5.2.2. Receiver/Idle Mode Radiated Spurious Emissions	13
<b>6. Measurement Uncertainty .....</b>	<b>19</b>
<b>7. Report Revision History .....</b>	<b>20</b>

### **1. Customer Information**

<b>Company Name:</b>	Sony Mobile Communications Inc.
<b>Address:</b>	Nya Vattentornet Mobilvägen 10 Lund 22188 Sweden

## **2. Summary of Testing**

### **2.1. General Information**

<b>Specification Reference:</b>	47CFR15.107 and 47CFR15.109
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart B (Unintentional Radiators) – Sections 15.107 and 15.109
<b>Site Registration:</b>	209735
<b>Location of Testing:</b>	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
<b>Test Dates:</b>	04 June 2014 to 10 June 2014

### **2.2. Summary of Test Results**

<b>FCC (47CFR)</b>	<b>Measurement</b>	<b>Result</b>
Part 15.107(a)	Receiver/Idle Mode AC Conducted Spurious Emissions	
Part 15.109	Receiver/Idle Mode Radiated Spurious Emissions	
<b>Key to Results</b>		
 = Complied  = Did not comply		

### **2.3. Methods and Procedures**

<b>Reference:</b>	ANSI C63.4 (2009)
<b>Title:</b>	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

### **2.4. Deviations from the Test Specification**

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT)**

<b>Brand Name:</b>	Sony
<b>IMEI:</b>	004402452705522 ( <i>Radiated sample</i> )
<b>Test Sample Serial Number:</b>	CB5A1YYLU6
<b>Hardware Version Number:</b>	A
<b>Software Version Number:</b>	23.0.A.0.204
<b>FCC ID:</b>	PY7PM-0800

<b>Brand Name:</b>	Sony
<b>Description:</b>	AC Charger
<b>Model Name or Number:</b>	EP880

<b>Brand Name:</b>	Generic
<b>Description:</b>	MHL Cable
<b>Model Name or Number:</b>	Not marked

<b>Brand Name:</b>	Sony
<b>Description:</b>	MHL Adaptor
<b>Model Name or Number:</b>	IM750

<b>Brand Name:</b>	Sony
<b>Description:</b>	Deskstand
<b>Model Name or Number:</b>	DK43

<b>Brand Name:</b>	Sony
<b>Description:</b>	USB Cable
<b>Model Name or Number:</b>	EC803

<b>Brand Name:</b>	Sony
<b>Description:</b>	PHF
<b>Model Name or Number:</b>	MH410c

**3.2. Description of EUT**

The equipment under test (EUT) was a GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac + NFC & ANT+.

**3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

**3.4. Additional Information Related to Testing**

<b>Type of Radio Device:</b>	Transceiver	
<b>Power Supply Requirement(s):</b>	Nominal	3.8 VDC

**3.5. Support Equipment**

The following support equipment was used to exercise the EUT during testing:

<b>Description:</b>	Laptop
<b>Brand Name:</b>	Dell
<b>Model Name or Number:</b>	E5410
<b>Serial Number:</b>	UL Number 00763

<b>Description:</b>	2 GB Micro SD Card
<b>Brand Name:</b>	Generic
<b>Model Name or Number:</b>	Not marked

<b>Brand Name:</b>	Logik
<b>Description:</b>	22" High Definition Television
<b>Model Name or Number:</b>	L22FE12A
<b>Serial Number:</b>	1309020661

## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

- Receiver/Idle mode.

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration(s):

- Idle radiated spurious emission tests were performed with the following configurations, employing all available accessories:
  - Configuration 1 – Handset with the AC charger, USB Cable, MHL cable (terminated in to a television), MHL adaptor and PHF.
  - Configuration 2 – Handset with the AC charger, USB Cable, Desk stand and PHF.

Pre-scans below 1 GHz were performed in both configurations 1 and 2, with final measurements limited to the configuration which provided worst case results. Pre-scans above 1 GHz were performed in the configuration that employed the most accessories (Configuration 1)

- The radiated sample with IMEI 004402452705522 was used for all measurements.

## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

**5.2. Test Results****5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions****Test Summary:**

<b>Test Engineer:</b>	Georgios Vrezas	<b>Test Date:</b>	04 June 2014
<b>Test Sample IMEI:</b>	004402452705522		

<b>FCC Reference:</b>	Part 15.107
<b>Test Method Used:</b>	ANSI C63.4-2009

**Environmental Conditions:**

<b>Temperature (°C):</b>	21
<b>Relative Humidity (%):</b>	57

**Results: Live / Quasi Peak**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.204	Live	39.9	63.4	23.5	Complied
0.227	Live	42.3	62.6	20.3	Complied
0.483	Live	36.4	56.3	19.9	Complied
1.100	Live	31.4	56.0	24.6	Complied
15.018	Live	39.1	60.0	20.9	Complied

**Results: Live / Average**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.231	Live	26.0	52.4	26.4	Complied
0.420	Live	24.2	47.4	23.2	Complied
0.483	Live	31.8	46.3	14.5	Complied
0.839	Live	22.0	46.0	24.0	Complied
1.100	Live	20.6	46.0	25.4	Complied
3.035	Live	17.3	46.0	28.7	Complied
14.955	Live	27.7	50.0	22.3	Complied


**Receiver/Idle Mode AC Conducted Spurious Emissions (continued)****Results: Neutral / Quasi Peak**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.195	Neutral	39.8	63.8	24.0	Complied
0.227	Neutral	42.6	62.6	20.0	Complied
0.483	Neutral	42.1	56.3	14.2	Complied
0.483	Neutral	42.1	56.3	14.2	Complied
0.839	Neutral	35.9	56.0	20.1	Complied
1.127	Neutral	35.8	56.0	20.2	Complied
1.451	Neutral	36.4	56.0	19.6	Complied
14.577	Neutral	41.9	60.0	18.1	Complied


**Results: Neutral / Average**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.227	Neutral	33.3	52.6	19.3	Complied
0.483	Neutral	37.6	46.3	8.7	Complied
0.483	Neutral	37.6	46.3	8.7	Complied
0.839	Neutral	29.6	46.0	16.4	Complied
1.127	Neutral	27.1	46.0	18.9	Complied
15.027	Neutral	29.9	50.0	20.1	Complied

**Receiver/Idle Mode AC Conducted Spurious Emissions (continued)**

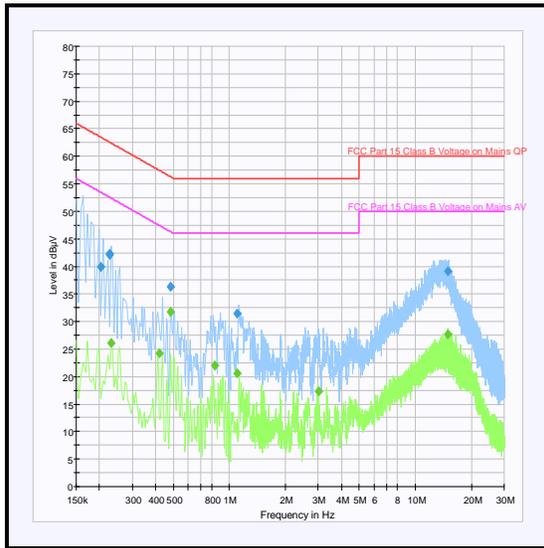

**Live**

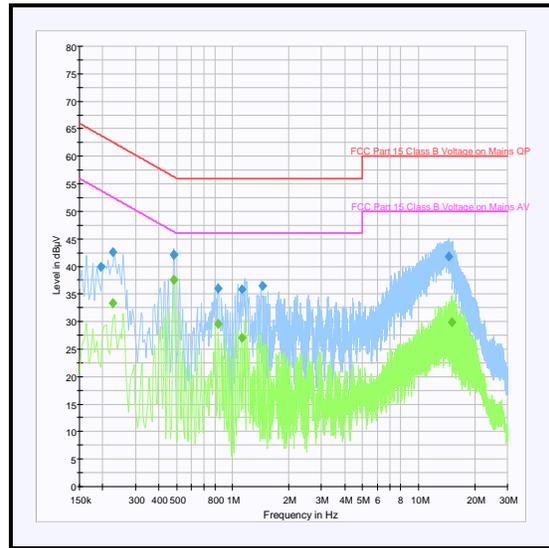

**Neutral**

*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*

**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1625	Thermohygrometer	JM Handelpunkt	30.5015.06	None stated	31 Dec 2014	12
A004	Single phase LISN	Rohde & Schwarz	ESH3-Z5	890604/027	18 Nov 2014	12
A1830	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100668	27 Feb 2015	12
M1263	EMI Test Receiver	Rohde & Schwarz	ESIB 7	100265	14 Oct 2014	12

**5.2.2. Receiver/Idle Mode Radiated Spurious Emissions****Test Summary:**

<b>Test Engineer:</b>	Andrew Edwards	<b>Test Date:</b>	07 June 2014
<b>Test Sample IMEI:</b>	004402452705522		

<b>FCC Reference:</b>	Part 15.109
<b>Test Method Used:</b>	ANSI C63.4-2009
<b>Frequency Range:</b>	9 KHz to 1000 MHz

**Environmental Conditions:**

<b>Temperature (°C):</b>	24
<b>Relative Humidity (%):</b>	32


**Note(s):**

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. In accordance with FCC part 15.33, pre scans were performed from 9 KHz to 30MHz. As there were no emissions observed within 20dB of the limit, in accordance with 15.31(o), no pre scans are included in this test report. The pre scans are kept on file and are available on request.
3. No spurious emissions were detected above the noise floor of the measuring receiver; the highest peak noise floor reading of the measuring receiver was recorded.
4. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

**Results: Quasi Peak**

<b>Frequency (MHz)</b>	<b>Antenna Polarity</b>	<b>Level (dBµV/m)</b>	<b>Limit (dBµV/m)</b>	<b>Margin (dB)</b>	<b>Result</b>
972.224	Vertical	33.6	54.0	20.4	Complied

**Receiver/Idle Mode Radiated Spurious Emissions (continued)**

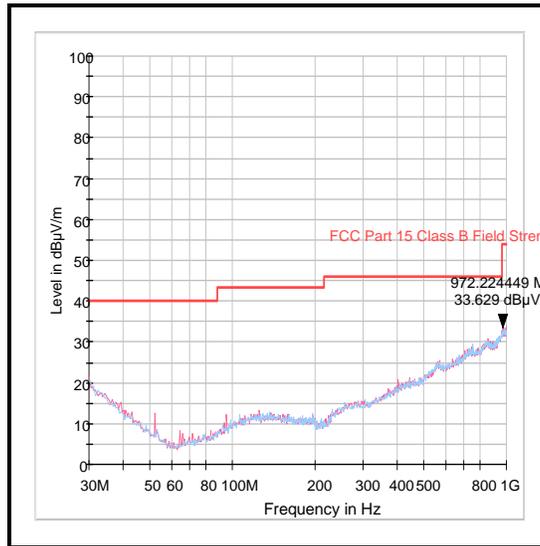

*Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.*

**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1622	Thermohygrometer	JM Handelspunkt	30.5015.06	None stated	31 Dec 2014	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	26 Nov 2014	12
A1834	Attenuator	Hewlett Packard	8491B	10444	15 Nov 2014	12
G0543	Amplifier	Sonoma	310N	230801	19 Aug 2014	3
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	15 Feb 2015	12
A490	Antenna	Chase	CBL6111A	1590	29 Apr 2015	12

**Receiver/Idle Mode Radiated Spurious Emissions (continued)****Test Summary:**

<b>Test Engineer:</b>	Andrew Edwards	<b>Test Date:</b>	10 June 2014
<b>Test Sample IMEI:</b>	004402452705522		

<b>FCC Reference:</b>	Part 15.109
<b>Test Method Used:</b>	As detailed in ANSI C63.4 Section 8
<b>Frequency Range:</b>	1 GHz to 29.5 GHz

**Environmental Conditions:**

<b>Temperature (°C):</b>	23
<b>Relative Humidity (%):</b>	46


**Note(s):**

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table below. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.
3. Measurements were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
4. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.


**Results:**

Frequency (MHz)	Antenna Polarity	Peak Level (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)	Result
25750.801	Vertical	51.4	54.0	2.6	Complied


**Receiver/Idle Mode Radiated Spurious Emissions (continued)**

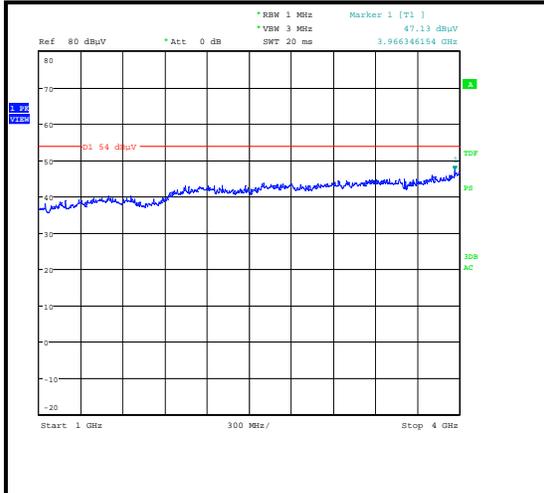


10295085  
Date: 10.JUN.2014 17:44:04

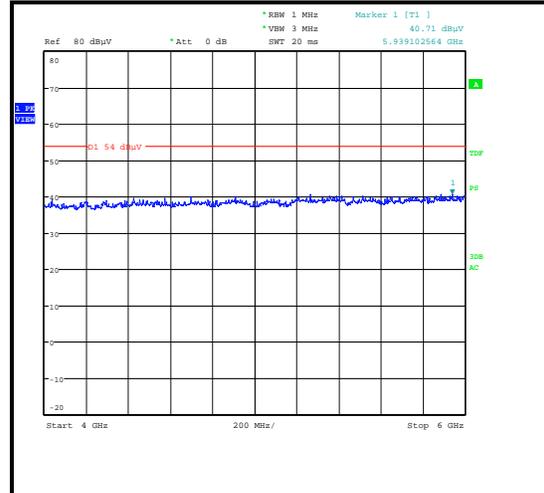

10295085  
Date: 10.JUN.2014 17:52:49

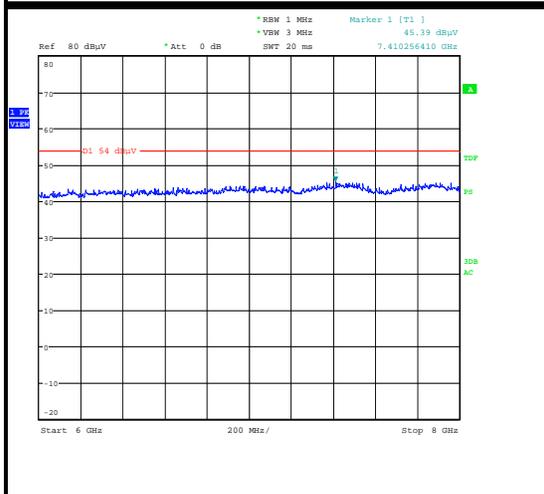


10295085  
Date: 10.JUN.2014 17:59:07

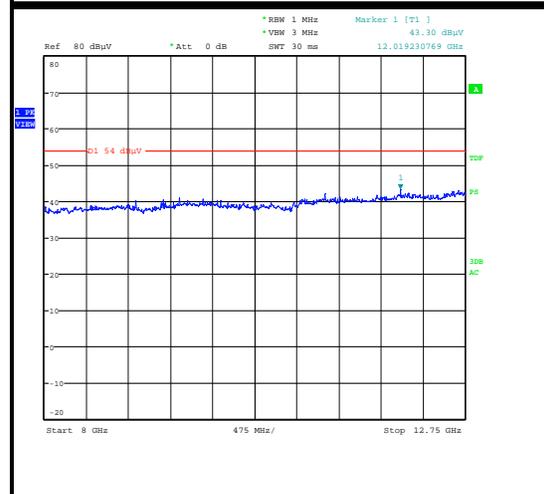


10295085  
Date: 10.JUN.2014 18:08:38


### Receiver/Idle Mode Radiated Spurious Emissions (continued)

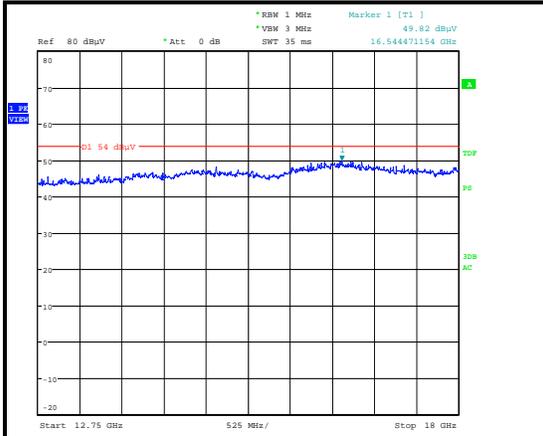

10295085  
Date: 10.JUN.2014 18:16:32

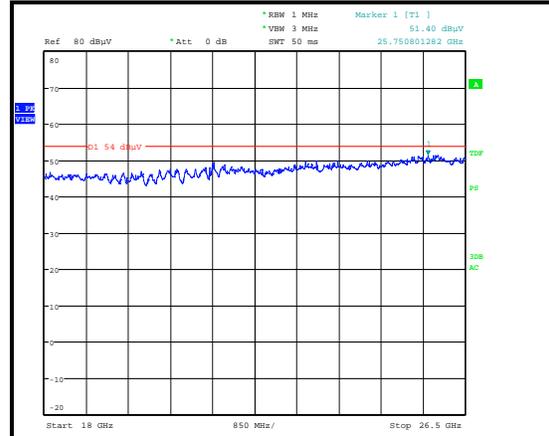

10295085  
Date: 10.JUN.2014 18:26:00

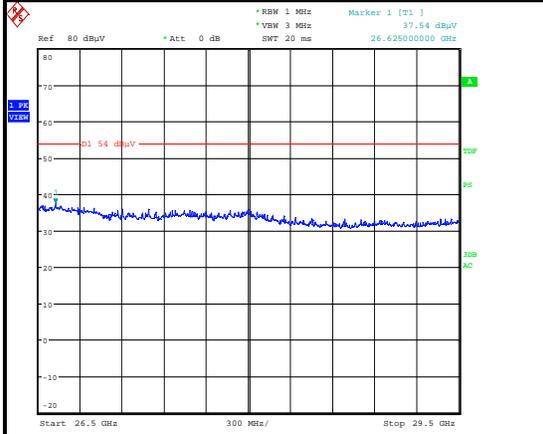

10295085  
Date: 10.JUN.2014 22:56:36

**Receiver/Idle Mode Radiated Spurious Emissions (continued)****Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	14 Mar 2015	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	14 Nov 2014	12
M1874	Test Receiver	Rohde & Schwarz	ESU26	100553	13 May 2015	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A0040 5	18 May 2015	12
A1818	Antenna	EMCO	3115	00075692	14 Nov 2014	12
A253	Antenna	Flann Microwave	12240-20	128	14 Nov 2014	12
A254	Antenna	Flann Microwave	14240-20	139	14 Nov 2014	12
A255	Antenna	Flann Microwave	16240-20	519	14 Nov 2014	12
A256	Antenna	Flann Microwave	18240-20	400	14 Nov 2014	12
A436	Antenna	Flann Microwave	20240-20	330	14 Nov 2014	12
A203	Antenna	Flann Microwave	22240-20	343	19 May 2016	36
A1785	Pre-Amplifier	Farran Technology	FLNA-28-30	FTL 6483	13 Jan 2015	12
M1630	Test Receiver	Rohde & Schwarz	ESU40	100233	13 Mar 2015	12
M1269	Multimeter	Fluke	179	90250210	19 May 2015	12
S0523	DC Power Supply Unit	TTi	PL320	224235	Calibrated before use	-

## **6. Measurement Uncertainty**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

<b>Measurement Type</b>	<b>Range</b>	<b>Confidence Level (%)</b>	<b>Calculated Uncertainty</b>
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±4.69 dB
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±5.65 dB
Radiated Spurious Emissions	1 GHz to 29.5 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## **7. Report Revision History**

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version
2.0	-	-	EUT Description update

--- END OF REPORT ---