



TEST REPORT

Test Report No. : UL-RPT-RP10295149JD02D V3.0

Manufacturer : Sony Mobile Communications Inc.

FCC ID : PY7PM-0803

Technology : LTE Band 26

Test Standard(s) : FCC Part 90 Subpart S

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 3.0 supersedes all previous versions.

Date of Issue: 04 August 2014

Checked by:

Sarah Williams
Engineer, Radio Laboratory

Issued by :

pp

John Newell
Group Quality Manager,
Basingstoke,
UL VS LTD



This laboratory is accredited by UKAS.
The tests reported herein have been
performed in accordance with its' terms
of accreditation.

UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

Table of Contents

1. Customer Information.....	4
2. Summary of Testing.....	5
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
3. Equipment Under Test (EUT)	6
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	8
3.5. Support Equipment	9
4. Operation and Monitoring of the EUT during Testing	10
4.1. Operating Modes	10
4.2. Configuration and Peripherals	10
4.3. Resource Block Allocation	11
5. Measurements, Examinations and Derived Results.....	12
5.1. General Comments	12
5.2. Test Results	13
5.2.1. Transmitter Carrier Output Power and Effective Radiated Power (ERP)	13
5.2.2. Transmitter Occupied Bandwidth	35
5.2.3. Transmitter Radiated Emissions	57
5.2.4. Transmitter Radiated Emissions at Band Edges	62
5.2.5. Transmitter Frequency Stability (Temperature Variation)	71
5.2.6. Transmitter Frequency Stability (Voltage Variation)	73
6. Measurement Uncertainty	74
7. Report Revision History	75

1. Customer Information

Company Name:	Sony Mobile Communications Inc.
Address:	Nya Vattentornet Mobilvägen 10 Lund 22188 Sweden

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR90
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 90 Subpart S - Regulations Governing Licensing and Use of Frequencies in the 806-824, 851-869, 896-901 and 935-940 MHz Bands
Site Registration:	209735
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	25 June 2014 to 01 July 2014

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
90.635(b) / 2.1046	Transmitter Carrier Output Power and Effective Radiated Power (ERP)	
90.209(b)(7) / 2.1049	Transmitter Occupied Bandwidth	
90.691 / 2.1053	Transmitter Radiated Emissions	
90.691 / 2.1053	Transmitter Radiated Band Edge Emissions	
90.213 / 2.1055	Transmitter Frequency Stability (Temperature and Voltage Variation)	
Key to Results		
 = Complied  = Did not comply		

2.3. Methods and Procedures

Reference:	ANSI/TIA-603-C-2004
Title:	Land Mobile FM or PM – Communications Equipment – Measurement and Performance Standards.
Reference:	FCC KDB 971168 D01 v02r01, 7 June 2013
Title:	Measurement Guidance for Certification of Licensed Digital Transmitters

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Sony
IMEI:	004402452687654 (<i>Radiated sample #1</i>)
Test Sample Serial Number:	CB5A1ZCDC8
Hardware Version Number:	A
Software Version Number:	23.0.C.0.114
FCC ID Number:	PY7PM-0803

Brand Name:	Sony
IMEI:	004402452687712 (<i>Radiated sample #2</i>)
Test Sample Serial Number:	CB5A1ZCDH6
Hardware Version Number:	A
Software Version Number:	23.0.C.0.114
FCC ID Number:	PY7PM-0803

Brand Name:	Sony
IMEI:	004402452690567 (<i>Conducted sample with RF port #1</i>)
Test Sample Serial Number:	CB5A1ZCDDW
Hardware Version Number:	A
Software Version Number:	23.0.C.0.114
FCC ID Number:	PY7PM-0803

Brand Name:	Sony
IMEI:	004402452690575 (<i>Conducted sample with RF port #2</i>)
Test Sample Serial Number:	CB5A1ZCDF2
Hardware Version Number:	A
Software Version Number:	23.0.C.0.114
FCC ID Number:	PY7PM-0803

Brand Name:	Sony
Description:	AC Charger
Model Name or Number:	EP880

Brand Name:	Generic
Description:	MHL Cable
Model Name or Number:	Not marked

Identification of Equipment Under Test (EUT) (continued)

Brand Name:	Sony
Description:	MHL Adaptor
Model Name or Number:	IM750

Brand Name:	Sony
Description:	USB Cable
Model Name or Number:	EC803

Brand Name:	Sony
Description:	Deskstand
Model Name or Number:	DK43

Brand Name:	Sony
Description:	PHF
Model Name or Number:	MH410c

3.2. Description of EUT

The equipment under test (EUT) was a GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac + NFC & ANT+.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Tested Technology:	LTE		
Type of Equipment	Transceiver		
Power Supply Requirement(s):	Nominal	3.8 VDC	
	Minimum	3.42 VDC	
	Maximum	4.18 VDC	
Modulation Type:	QPSK & 16QAM		
Duty Cycle:	100 %		
Channel Bandwidth:	1.4 MHz, 3 MHz, 5 MHz & 10 MHz		
Antenna Gain:	-3.85 dBd		
Transmit Frequency Range:	814 MHz to 824 MHz		
Channels Tested:	Channel Bandwidth (MHz)	N_{ul}	Frequency of Uplink (MHz)
Bottom Channel	1.4	26697	814.7
	3	26705	815.5
	5	26715	816.5
Middle Channel	10	26740	819.0
Top Channel	1.4	26783	823.3
	3	26775	822.5
	5	26765	821.5

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	2 GB Micro SD Card
Brand Name:	Generic
Model Name or Number:	Not marked

Description:	22" High Definition Television
Brand Name:	Logik
Model Name or Number:	L22FE12A
Serial Number:	1309020661

Description:	Voltage variation jig
Brand Name:	Not marked
Model Name or Number:	Not marked
Serial Number:	Not marked

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Transmit Mode - The EUT was set to transmit with maximum output power using the required channel bandwidth. QPSK and 16QAM modulations were both tested, with Resource Block allocation as detailed in section 4.3.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The EUT was connected to a Rohde and Schwarz CMW500 LTE system simulator, operating in a transceiver mode.
- Transmitter radiated spurious emission tests were performed with the following configurations, employing all available accessories:
 - Configuration 1 – Handset with the AC charger, USB Cable, MHL cable (terminated in to a television), MHL adaptor and PHF
 - Configuration 2 – Handset with the AC charger, Desk stand and PHF

Pre-scans below 1 GHz were performed in both configurations 1 and 2, with final measurements limited to the configuration which provided worst case results. Pre-scans above 1 GHz were performed in the configuration that employed the most accessories (Configuration 1), with any final measurements being performed in both configurations.

- Transmitter radiated spurious emissions tests were performed with the EUT was set to transmit with a 1.4 MHz channel bandwidth with QPSK modulation applied and 1 resource block with 0 offset. This was found to be the worst case modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest transmit output power level, it was deemed to be the worst case.
- The EUT was supplied with an RF conducted port and external RF cable, to allow conducted measurements to be performed where necessary.
- Testing at temperature and voltage extremes was performed using a voltage variation jig and adaptor supplied by the customer. The adaptor plugs onto the handset in place of the battery connector.
- The voltage variation jig and adaptor were used for conducted measurements set at the nominal voltage.
- The conducted sample with IMEI 004402452690575 was used for frequency stability measurements.
- The conducted sample with IMEI 004402452690567 was used for output power and occupied bandwidth measurements.
- The radiated sample with IMEI 004402452687654 was used for radiated emissions measurements.
- The radiated sample with IMEI 004402452687712 was used for radiated emissions at band edges measurements.

4.3. Resource Block Allocation

Channel Bandwidth (MHz)	Maximum No. of Resource Blocks	Resource Block / Offset Number							
		Sub Test 1		Sub Test 2		Sub Test 3		Sub Test 4	
		RB	Offset	RB	Offset	RB	Offset	RB	Offset
1.4	6	1	0	1	5	3	2	6	0
3	15	1	0	1	14	8	4	15	0
5	25	1	0	1	24	12	6	25	0
10	50	1	0	1	49	25	12	50	0
15	75	1	0	1	74	36	18	75	0

Transmitter Output Power was carried out using sub tests 1, 2, 3 and 4, with both QPSK and 16QAM modulation schemes.

Transmitter Occupied Bandwidth was carried out using sub tests 3 and 4, for both QPSK and 16QAM modulation schemes.

Transmitter Radiated Emissions testing was carried out using sub test 1, with a 1.4 MHz channel bandwidth and QPSK modulation scheme, as this was found to be the worst case modulation schemes with regards to emissions after preliminary investigations and, as this mode emits the highest transmit output power level, it was deemed to be the worst case.

Transmitter Radiated Band Edge Emissions was tested with sub test 4 on all supported channel bandwidths, using QPSK and 16QAM modulations with the maximum resource blocks settings.

Transmitter Frequency Stability test was carried out with sub test 4, with a channel bandwidth of 1.4 MHz only.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6* for Measurement Uncertainty details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Test Summary:

Test Engineer:	Nick Steele	Test Date:	25 June 2014
Test Sample IMEI:	004402452690567		

FCC Reference:	Parts 90.635(b) and 2.1046
Test Method Used:	As detailed in KDB 971168 D01 Section 5.2.1

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	39

Note(s):


1. The customer stated that a maximum antenna gain of -1.7 dBi, as the limit is ERP the gain in dBi has been converted. The dBd has been calculated as.

$$-1.7 \text{ dBi} - 2.15 \text{ dB} = -3.85 \text{ dBd}$$
2. Measurements were performed with the EUT transmitting with QPSK and 16QAM modulation schemes, with resource blocks settings as detailed in section 4.3 of this report.
3. The spectrum analyser's channel power function was used to integrate across the occupied bandwidth. The resolution bandwidth was set to between 1-5% of the occupied bandwidth and the video bandwidth was set to at least 3 times the resolution bandwidth. An RMS detector was used, sweep time was set to auto and the trace was averaged over 300 traces. The span was set to at least 1.5 times the occupied bandwidth. The channel power results are recorded in the tables below.
4. The RF port of the EUT was connected to the spectrum analyser via RF cables, directional coupler and suitable attenuation. An RF level offset was entered on the spectrum analyser, to compensate for the signal path losses in these components.


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 1.4 MHz Channel Bandwidth / Bottom Channel / QPSK


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
814.7	6	0	19.6	-3.85	15.75	50.0	34.25	Complied
814.7	3	2	20.5	-3.85	16.65	50.0	33.35	Complied
814.7	1	0	21.0	-3.85	17.15	50.0	32.85	Complied
814.7	1	5	20.9	-3.85	17.05	50.0	32.95	Complied

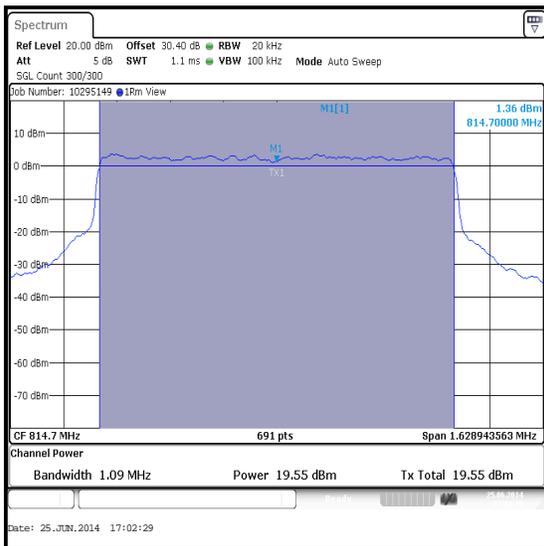


QPSK / 6 Resource Blocks (0 Offset)

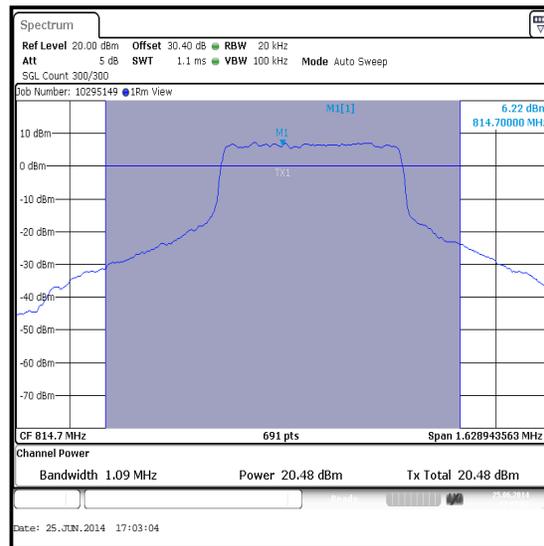

QPSK / 3 Resource Blocks (2 Offset)

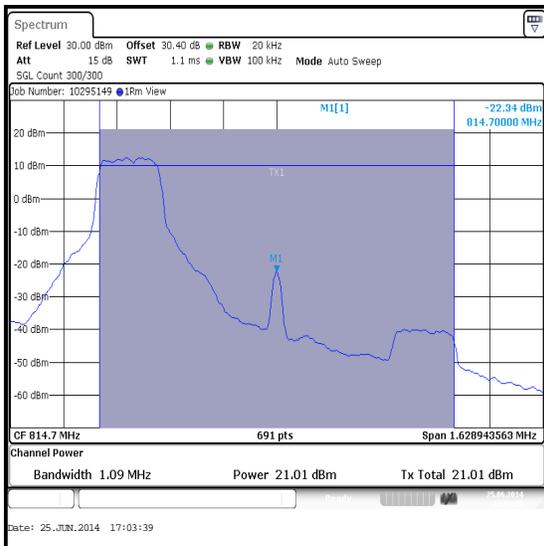

QPSK / 1 Resource Block (0 Offset)

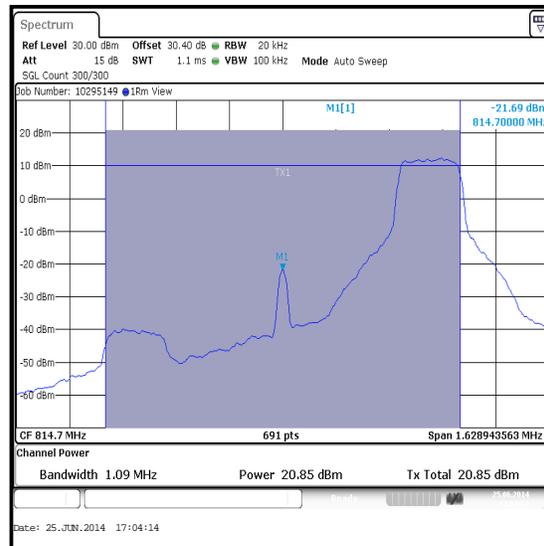


QPSK / 1 Resource Block (5 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 1.4 MHz Channel Bandwidth / Bottom Channel / 16QAM


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
814.7	6	0	18.5	-3.85	14.65	50.0	35.35	Complied
814.7	3	2	19.5	-3.85	15.65	50.0	34.35	Complied
814.7	1	0	19.9	-3.85	16.05	50.0	33.95	Complied
814.7	1	5	19.8	-3.85	15.95	50.0	34.05	Complied

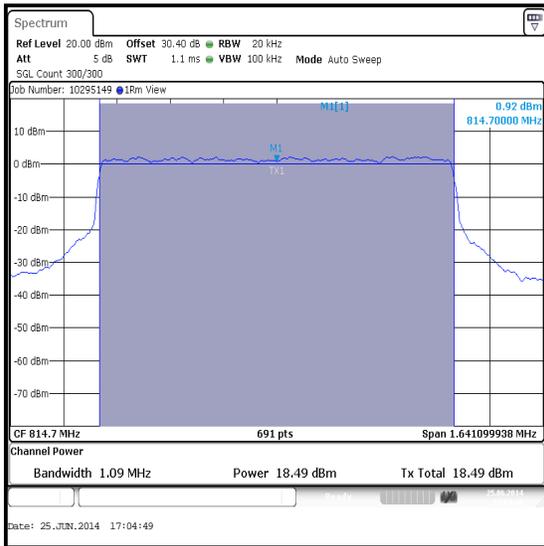


16QAM / 6 Resource Blocks (0 Offset)

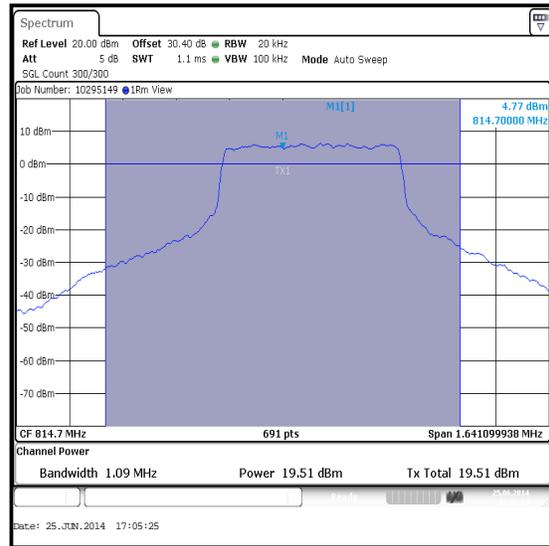

16QAM / 3 Resource Blocks (2 Offset)

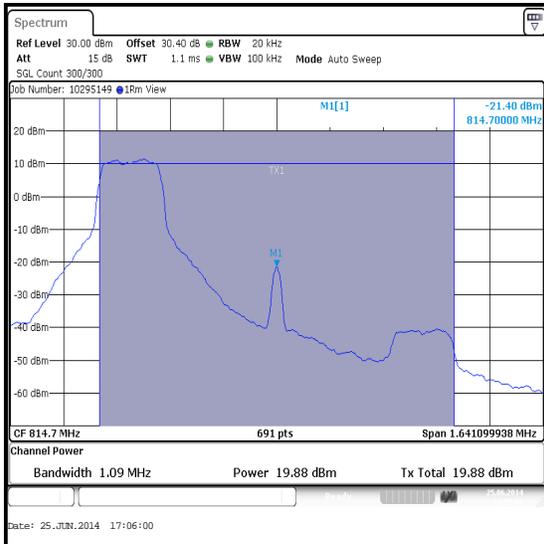

16QAM / 1 Resource Block (0 Offset)

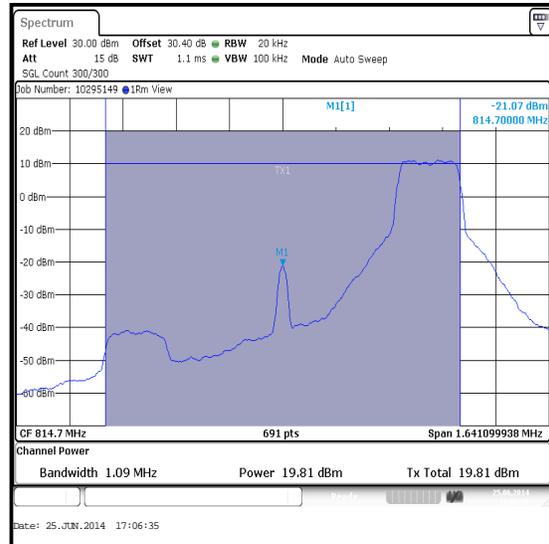


16QAM / 1 Resource Block (5 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 1.4 MHz Channel Bandwidth / Middle Channel / QPSK


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	6	0	19.6	-3.85	15.75	50.0	34.25	Complied
819.0	3	2	20.6	-3.85	16.75	50.0	33.25	Complied
819.0	1	0	21.3	-3.85	17.45	50.0	32.55	Complied
819.0	1	5	21.1	-3.85	17.25	50.0	32.75	Complied

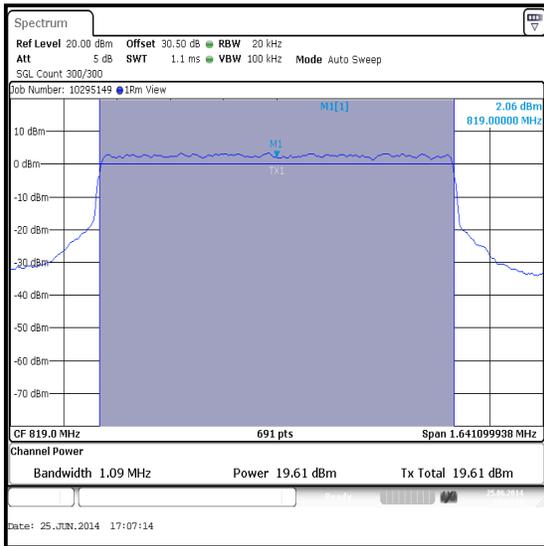


QPSK / 6 Resource Blocks (0 Offset)

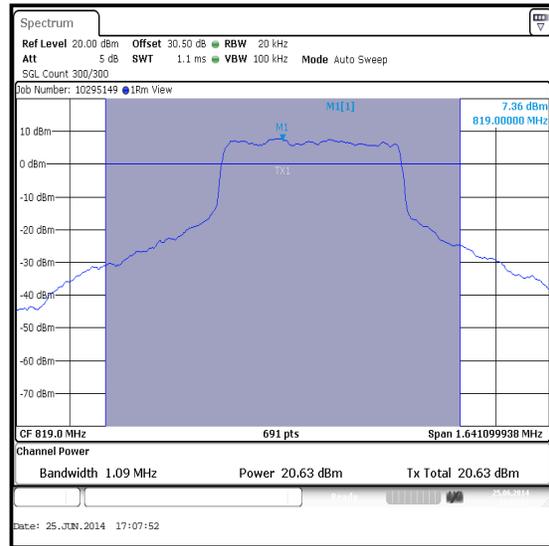

QPSK / 3 Resource Blocks (2 Offset)

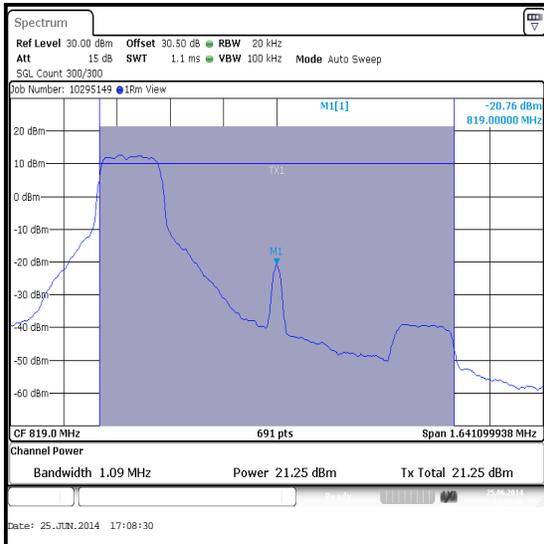

QPSK / 1 Resource Block (0 Offset)

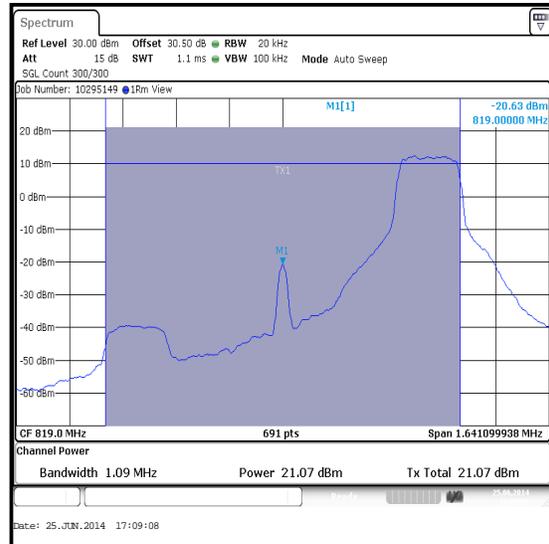


QPSK / 1 Resource Block (5 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 1.4 MHz Channel Bandwidth / Middle Channel / 16QAM


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	6	0	18.7	-3.85	14.85	50.0	35.15	Complied
819.0	3	2	19.7	-3.85	15.85	50.0	34.15	Complied
819.0	1	0	19.9	-3.85	16.05	50.0	33.95	Complied
819.0	1	5	19.7	-3.85	15.85	50.0	34.15	Complied

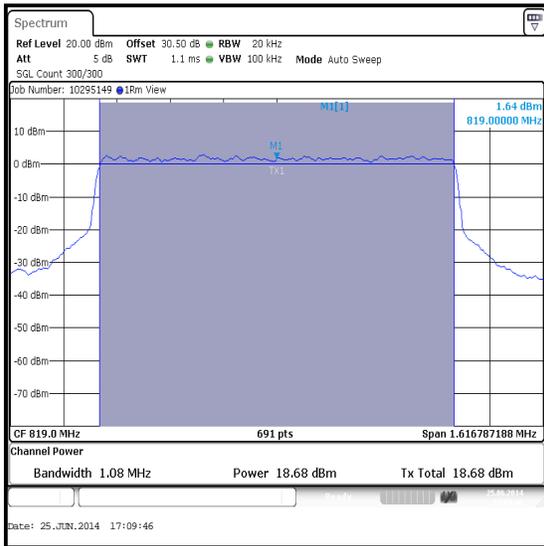


16QAM / 6 Resource Blocks (0 Offset)

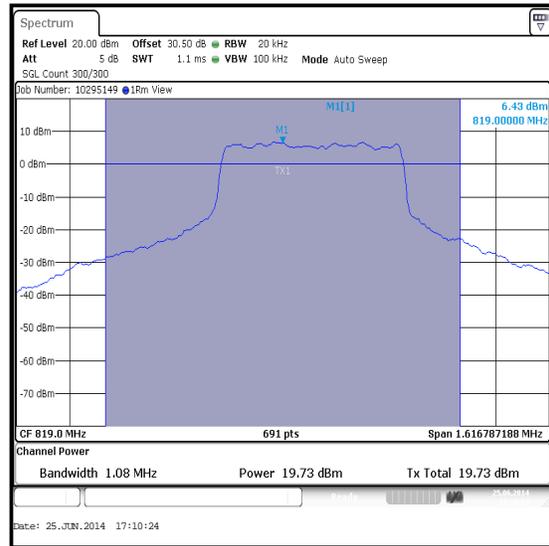

16QAM / 3 Resource Blocks (2 Offset)

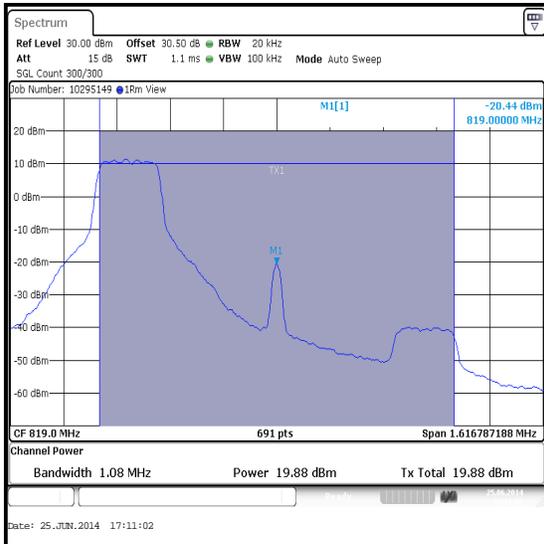

16QAM / 1 Resource Block (0 Offset)

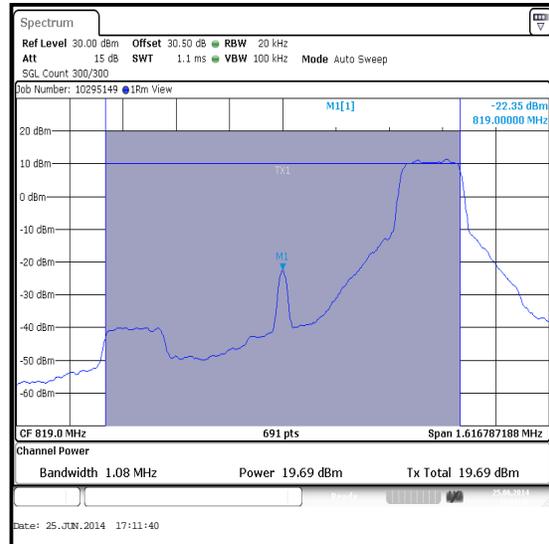


16QAM / 1 Resource Block (5 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 1.4 MHz Channel Bandwidth / Top Channel / QPSK


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
823.3	6	0	19.6	-3.85	15.75	50.0	34.25	Complied
823.3	3	2	20.5	-3.85	16.65	50.0	33.35	Complied
823.3	1	0	20.9	-3.85	17.05	50.0	32.95	Complied
823.3	1	5	21.0	-3.85	17.15	50.0	32.85	Complied

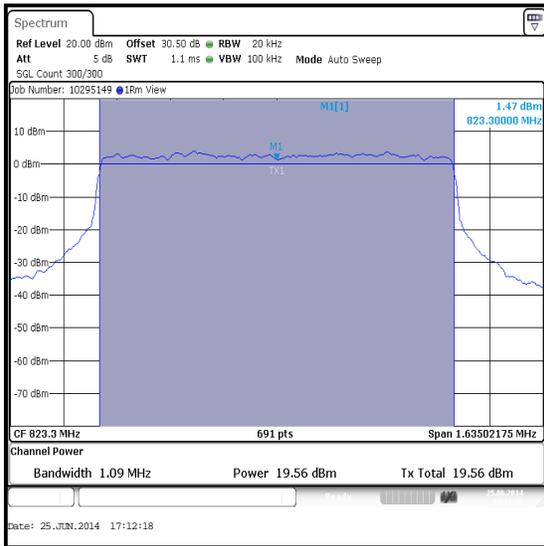


QPSK / 6 Resource Blocks (0 Offset)

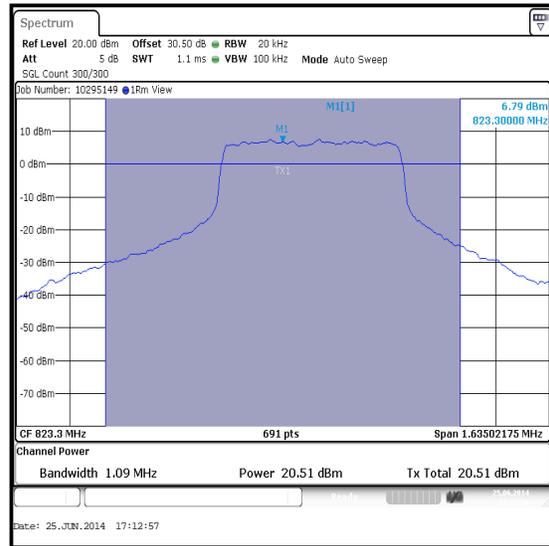

QPSK / 3 Resource Blocks (2 Offset)

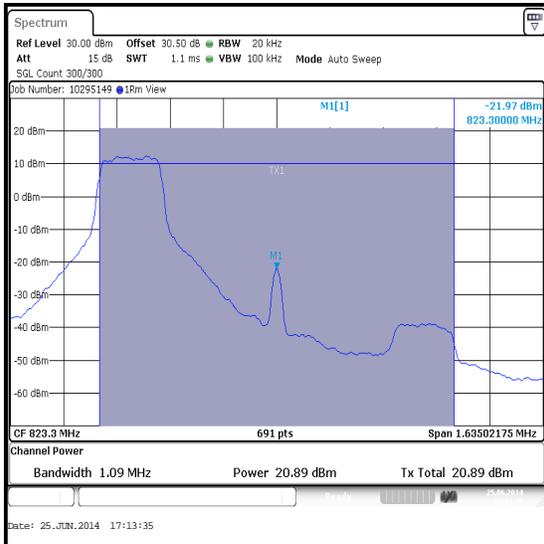

QPSK / 1 Resource Block (0 Offset)

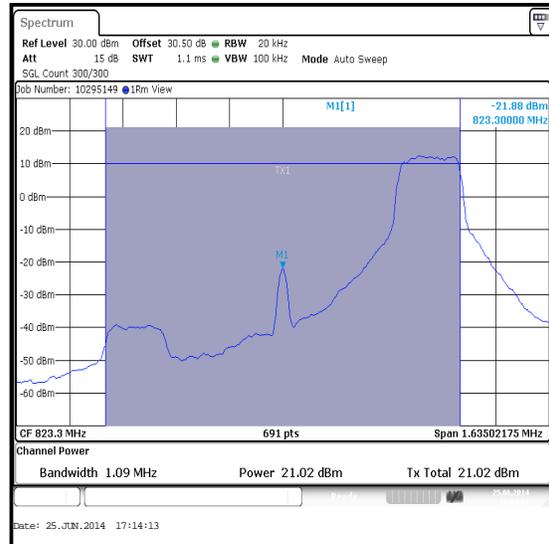


QPSK / 1 Resource Block (5 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 1.4 MHz Channel Bandwidth / Top Channel / 16QAM


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
823.3	6	0	18.5	-3.85	14.65	50.0	35.35	Complied
823.3	3	2	19.6	-3.85	15.75	50.0	34.25	Complied
823.3	1	0	19.7	-3.85	15.85	50.0	34.15	Complied
823.3	1	5	19.7	-3.85	15.85	50.0	34.15	Complied

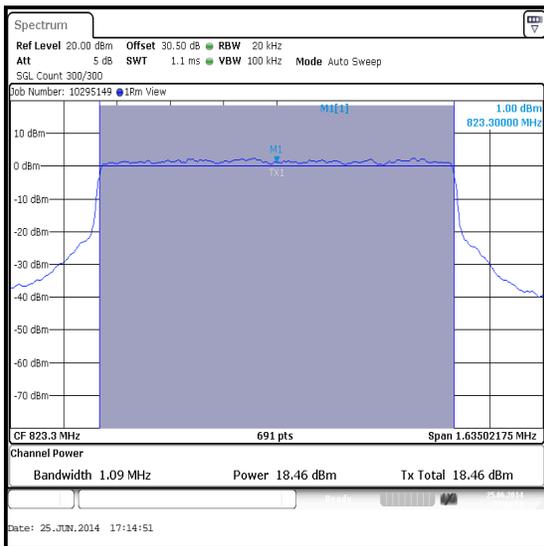


16QAM / 6 Resource Blocks (0 Offset)

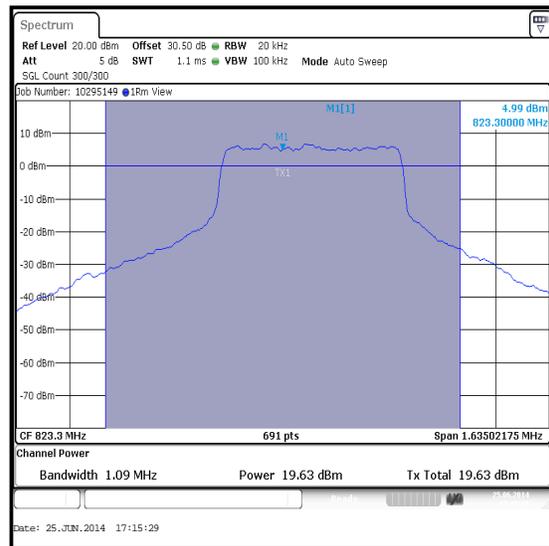

16QAM / 3 Resource Blocks (2 Offset)

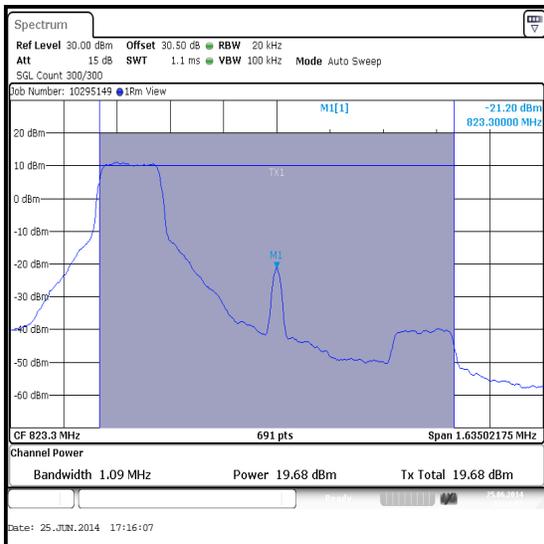

16QAM / 1 Resource Block (0 Offset)

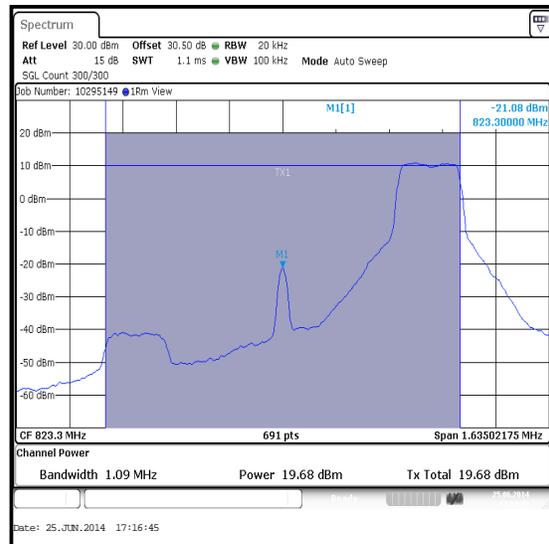


16QAM / 1 Resource Block (5 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 3 MHz Channel Bandwidth / Bottom Channel / QPSK


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
815.5	15	0	19.0	-3.85	15.15	50.0	34.85	Complied
815.5	8	4	18.8	-3.85	14.95	50.0	35.05	Complied
815.5	1	0	20.7	-3.85	16.85	50.0	33.15	Complied
815.5	1	14	21.1	-3.85	17.25	50.0	32.75	Complied

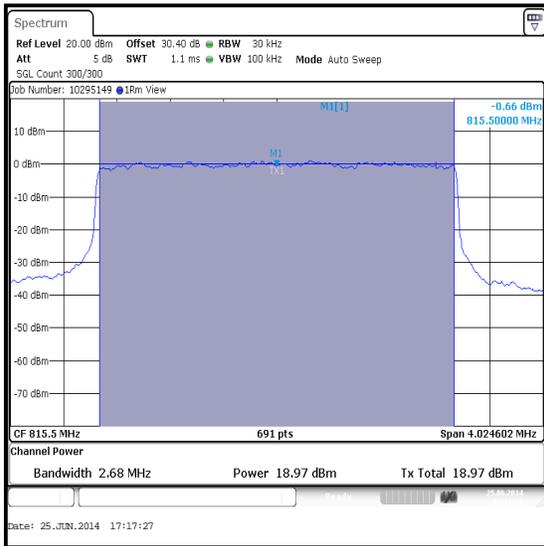


QPSK / 15 Resource Blocks (0 Offset)

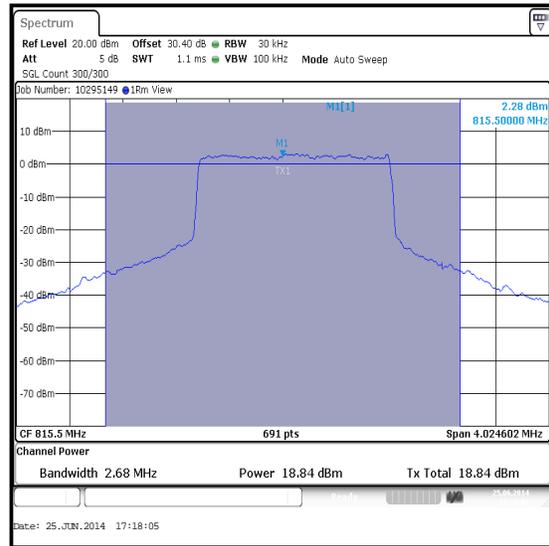

QPSK / 8 Resource Blocks (4 Offset)

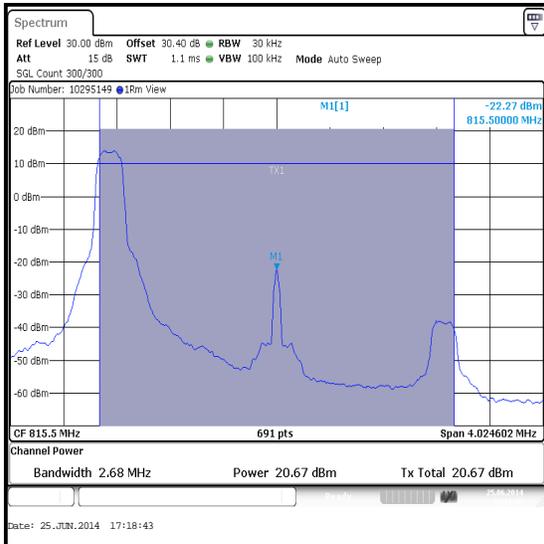

QPSK / 1 Resource Block (0 Offset)

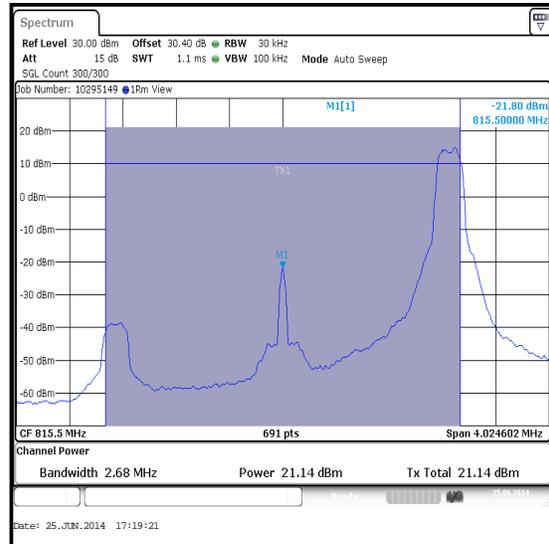


QPSK / 1 Resource Block (14 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 3 MHz Channel Bandwidth / Bottom Channel / 16QAM


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
815.5	15	0	17.9	-3.85	14.05	50.0	35.95	Complied
815.5	8	4	17.9	-3.85	14.05	50.0	35.95	Complied
815.5	1	0	19.5	-3.85	15.65	50.0	34.35	Complied
815.5	1	14	19.5	-3.85	15.65	50.0	34.35	Complied

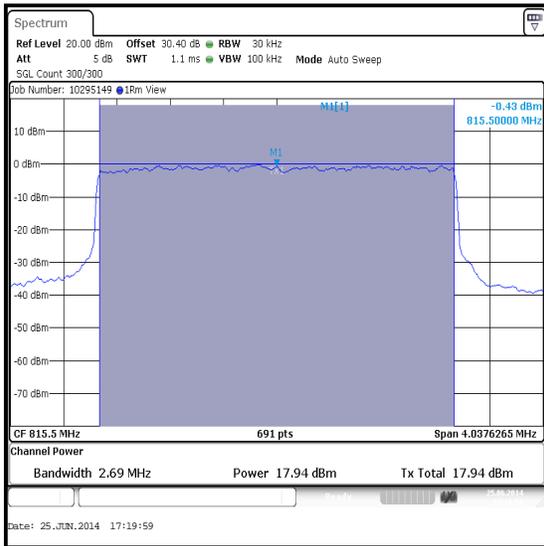


16QAM / 15 Resource Blocks (0 Offset)

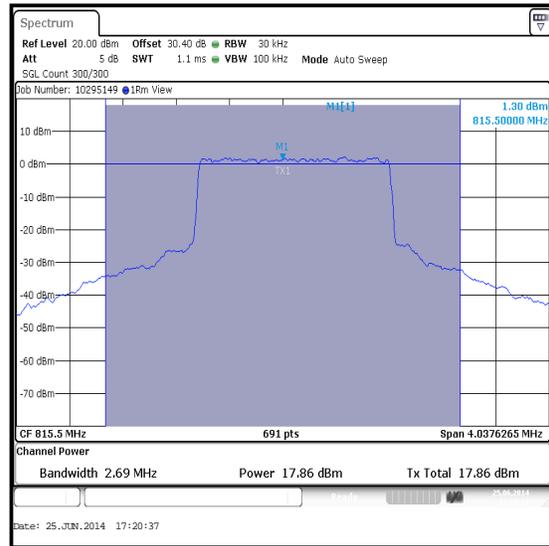

16QAM / 8 Resource Blocks (4 Offset)

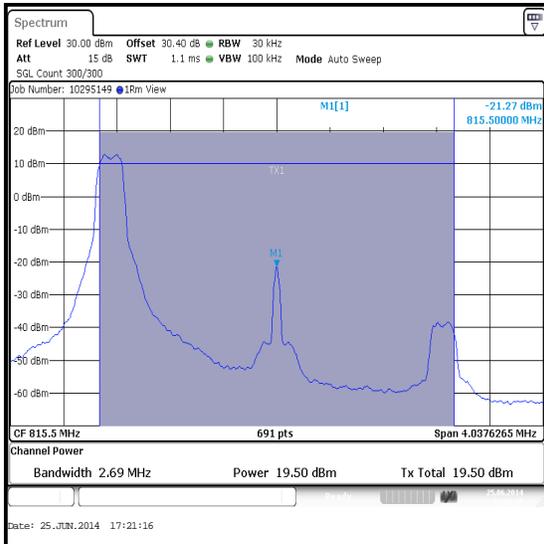

16QAM / 1 Resource Block (0 Offset)

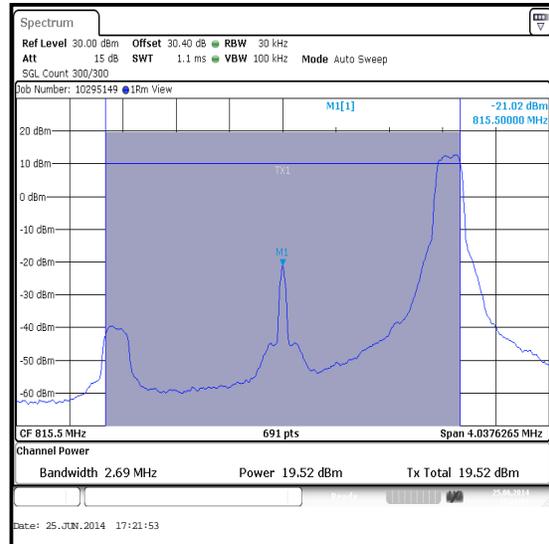


16QAM / 1 Resource Block (14 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 3 MHz Channel Bandwidth / Middle Channel / QPSK


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	15	0	18.8	-3.85	14.95	50.0	35.05	Complied
819.0	8	4	19.0	-3.85	15.15	50.0	34.85	Complied
819.0	1	0	20.9	-3.85	17.05	50.0	32.95	Complied
819.0	1	14	20.7	-3.85	16.85	50.0	33.15	Complied

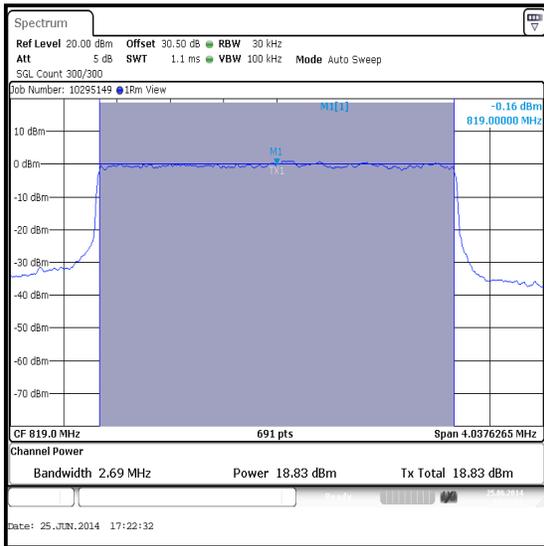


QPSK / 15 Resource Blocks (0 Offset)

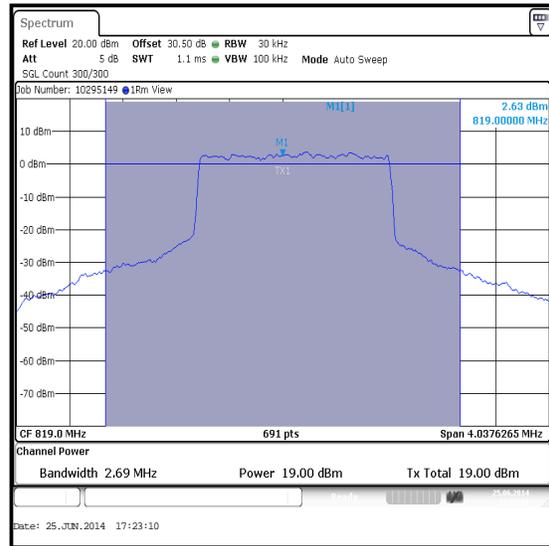

QPSK / 8 Resource Blocks (4 Offset)

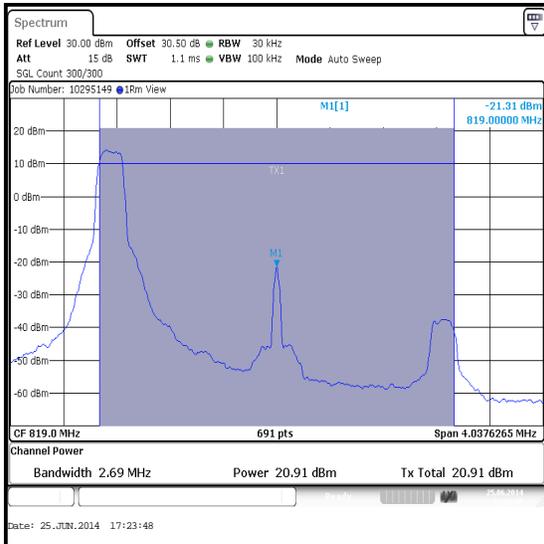

QPSK / 1 Resource Block (0 Offset)

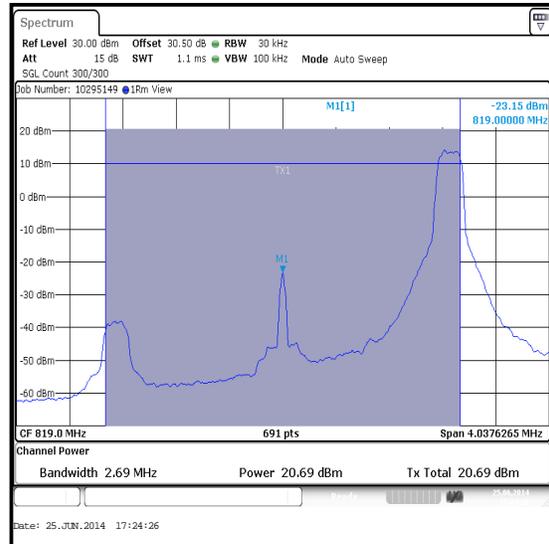


QPSK / 1 Resource Block (14 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 3 MHz Channel Bandwidth / Middle Channel / 16QAM


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	15	0	17.9	-3.85	14.05	50.0	35.95	Complied
819.0	8	4	17.9	-3.85	14.05	50.0	35.95	Complied
819.0	1	0	19.4	-3.85	15.55	50.0	34.45	Complied
819.0	1	14	19.2	-3.85	15.35	50.0	34.65	Complied

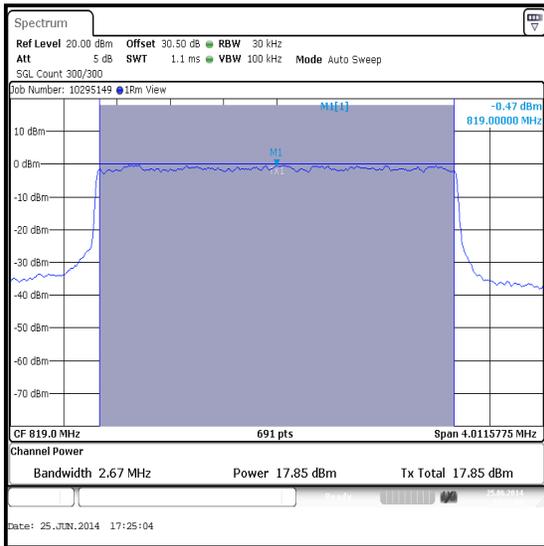


16QAM / 15 Resource Blocks (0 Offset)

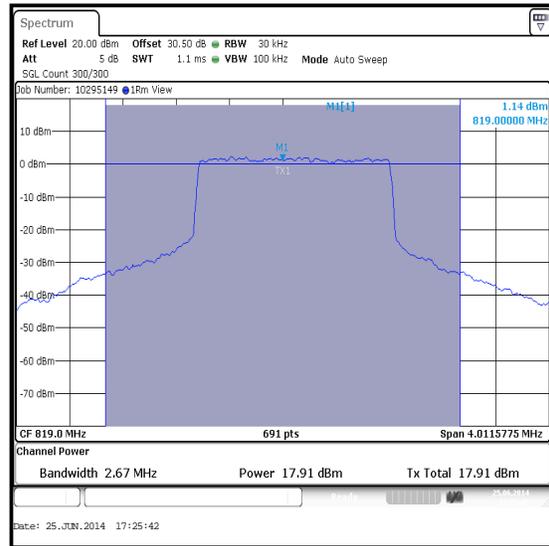

16QAM / 8 Resource Blocks (4 Offset)

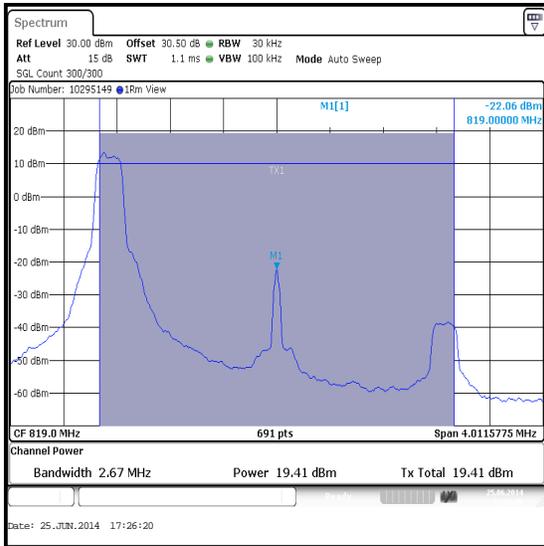

16QAM / 1 Resource Block (0 Offset)

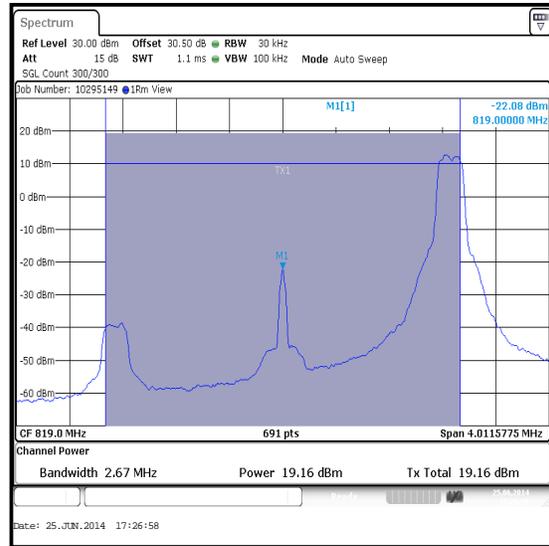


16QAM / 1 Resource Block (14 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 3 MHz Channel Bandwidth / Top Channel / QPSK


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
822.5	15	0	18.8	-3.85	14.95	50.0	35.05	Complied
822.5	8	4	18.9	-3.85	15.05	50.0	34.95	Complied
822.5	1	0	21.0	-3.85	17.15	50.0	32.85	Complied
822.5	1	14	20.8	-3.85	16.95	50.0	33.05	Complied

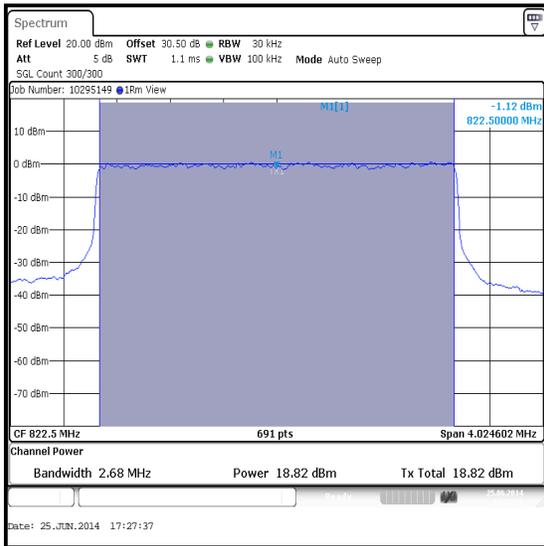


QPSK / 15 Resource Blocks (0 Offset)

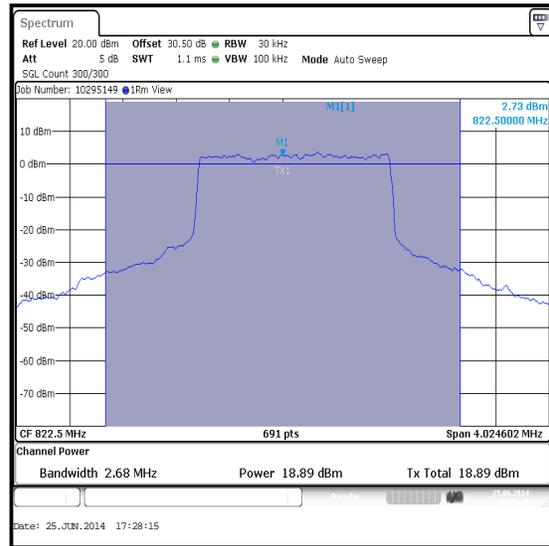

QPSK / 8 Resource Blocks (4 Offset)

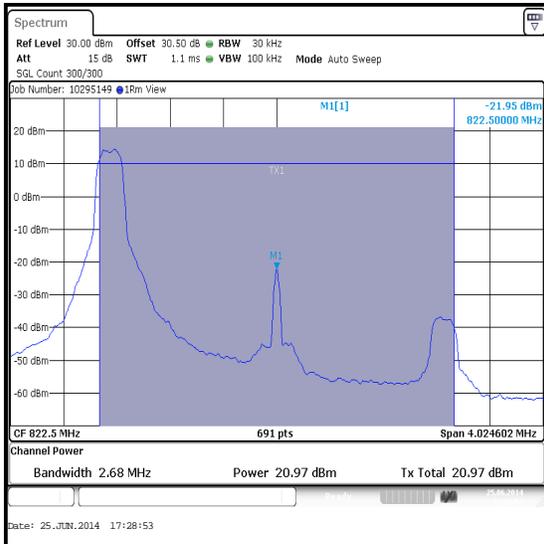

QPSK / 1 Resource Block (0 Offset)

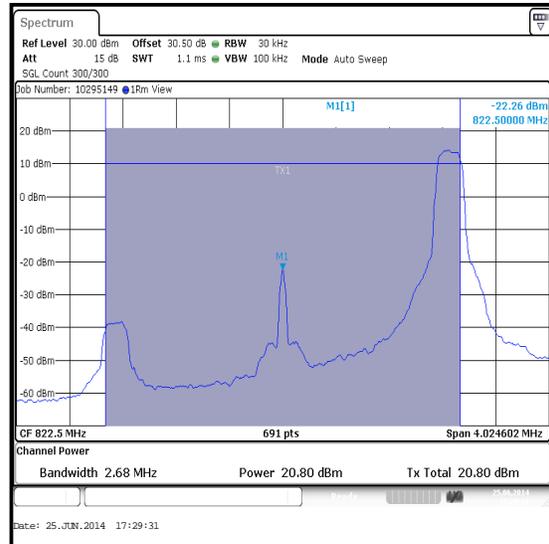


QPSK / 1 Resource Block (14 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 3 MHz Channel Bandwidth / Top Channel / 16QAM


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
822.5	15	0	17.9	-3.85	14.05	50.0	35.95	Complied
822.5	8	4	18.0	-3.85	14.15	50.0	35.85	Complied
822.5	1	0	19.9	-3.85	16.05	50.0	33.95	Complied
822.5	1	14	19.7	-3.85	15.85	50.0	34.15	Complied

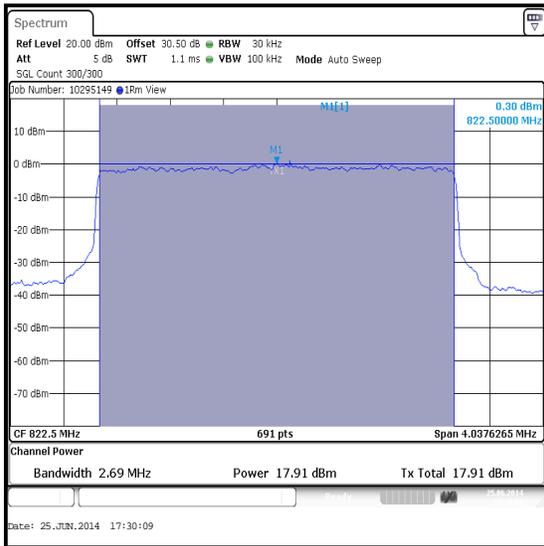


16QAM / 15 Resource Blocks (0 Offset)

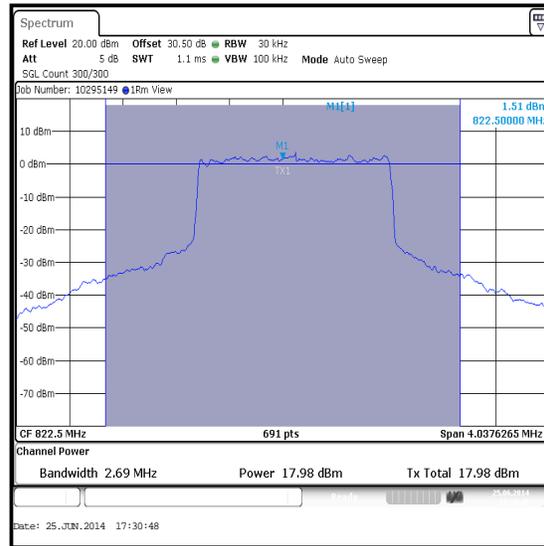

16QAM / 8 Resource Blocks (4 Offset)

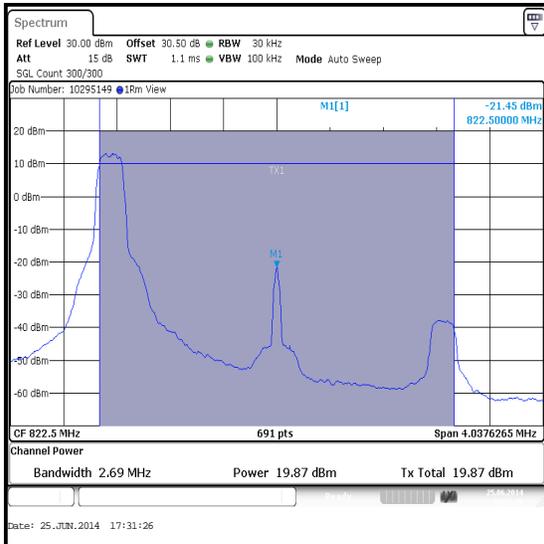

16QAM / 1 Resource Block (0 Offset)

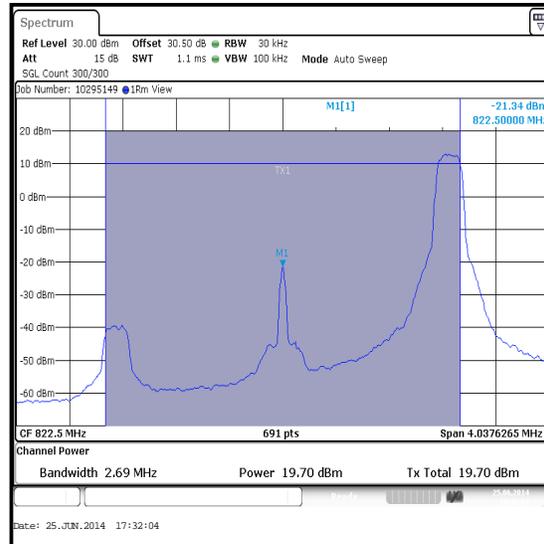


16QAM / 1 Resource Block (14 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 5 MHz Channel Bandwidth / Bottom Channel / QPSK


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
816.5	25	0	17.8	-3.85	13.95	50.0	36.05	Complied
816.5	12	6	18.0	-3.85	14.15	50.0	35.85	Complied
816.5	1	0	20.9	-3.85	17.05	50.0	32.95	Complied
816.5	1	24	21.0	-3.85	17.15	50.0	32.85	Complied

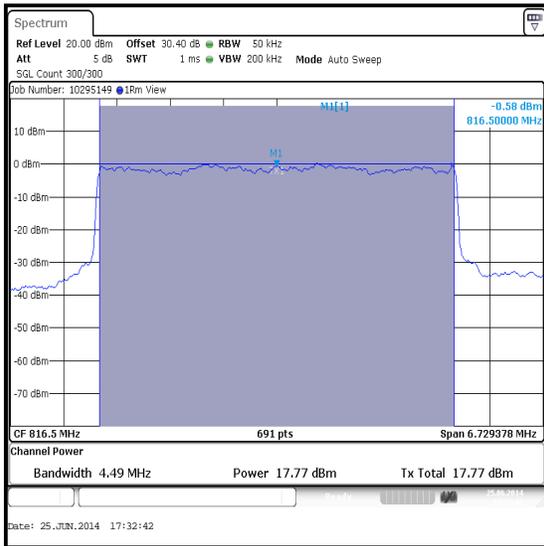


QPSK / 25 Resource Blocks (0 Offset)

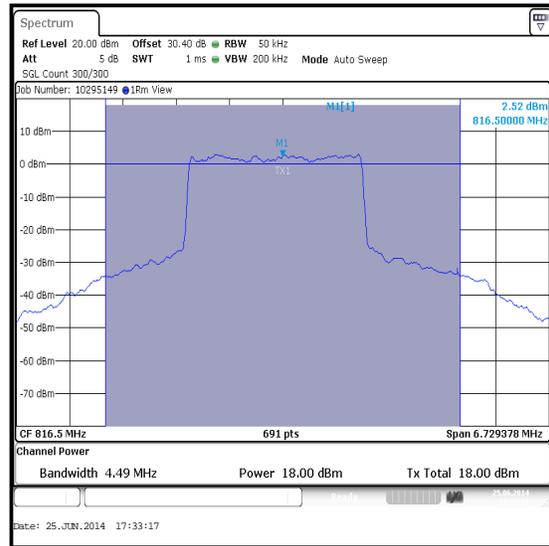

QPSK / 12 Resource Blocks (6 Offset)

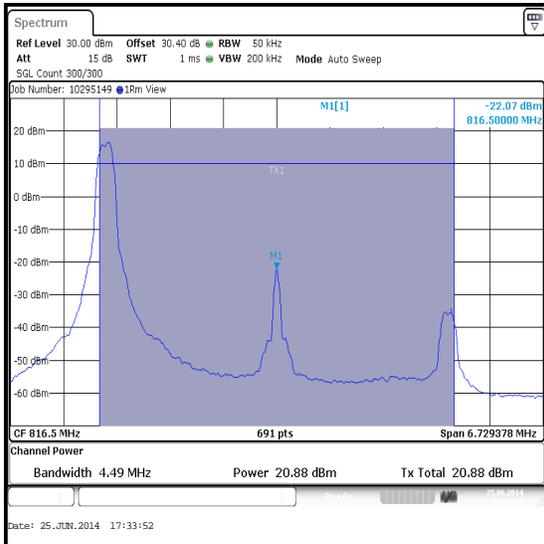

QPSK / 1 Resource Block (0 Offset)

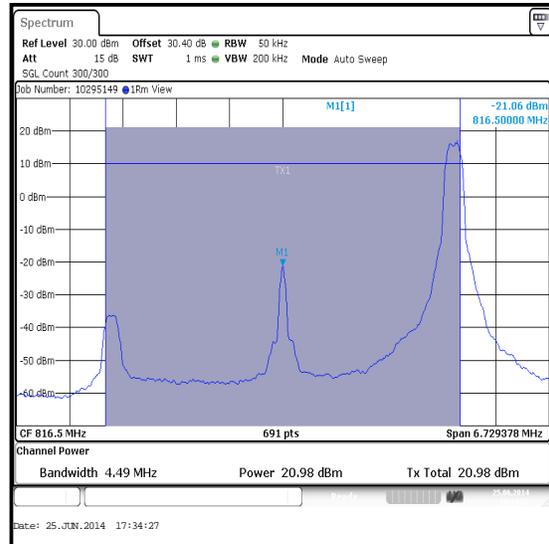


QPSK / 1 Resource Block (24 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 5 MHz Channel Bandwidth / Bottom Channel / 16QAM


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
816.5	25	0	16.9	-3.85	13.05	50.0	36.95	Complied
816.5	12	6	16.9	-3.85	13.05	50.0	36.95	Complied
816.5	1	0	19.6	-3.85	15.75	50.0	34.25	Complied
816.5	1	24	19.7	-3.85	15.85	50.0	34.15	Complied

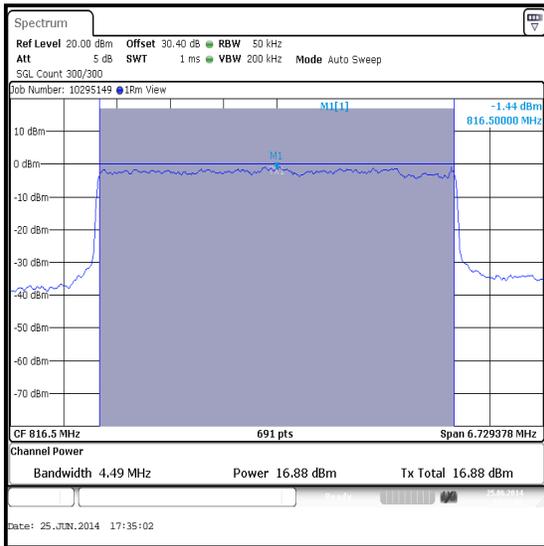


16QAM / 25 Resource Blocks (0 Offset)

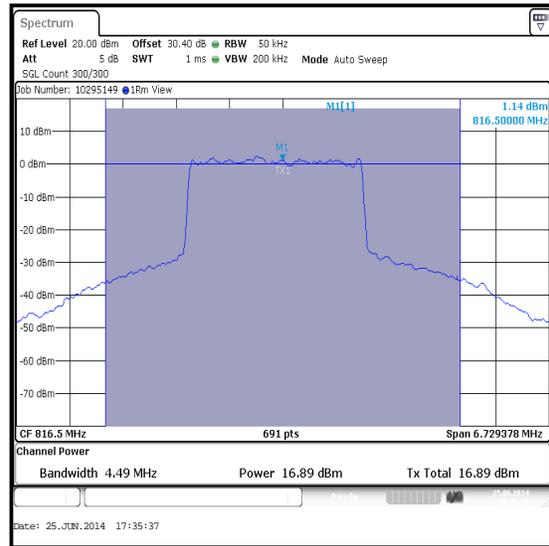

16QAM / 12 Resource Blocks (6 Offset)

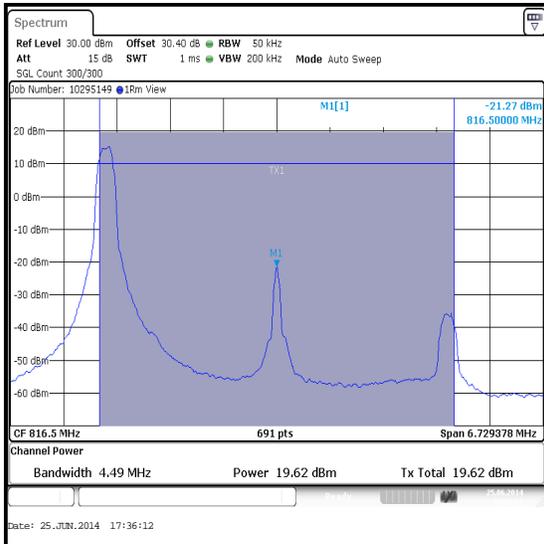

16QAM / 1 Resource Block (0 Offset)

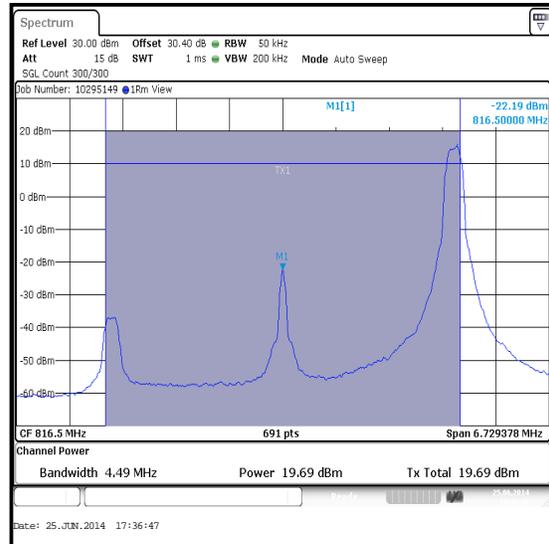


16QAM / 1 Resource Block (24 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 5 MHz Channel Bandwidth / Middle Channel / QPSK


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	25	0	18.0	-3.85	14.15	50.0	35.85	Complied
819.0	12	6	17.7	-3.85	13.85	50.0	36.15	Complied
819.0	1	0	21.1	-3.85	17.25	50.0	32.75	Complied
819.0	1	24	20.6	-3.85	16.75	50.0	33.25	Complied

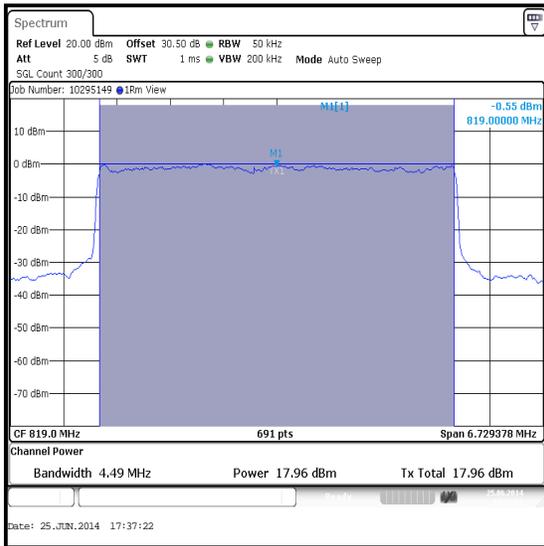


QPSK / 25 Resource Blocks (0 Offset)

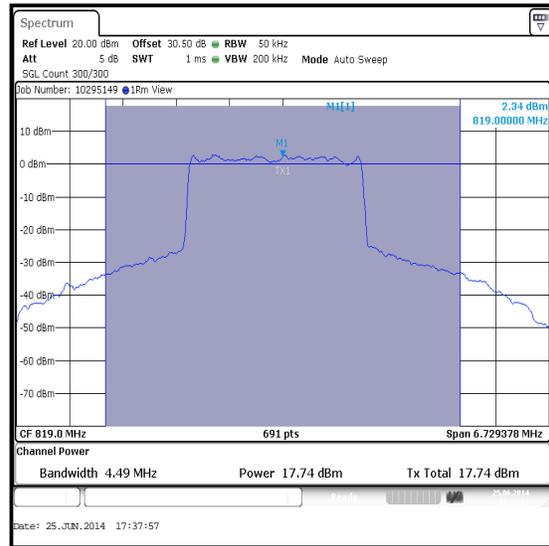

QPSK / 12 Resource Blocks (6 Offset)

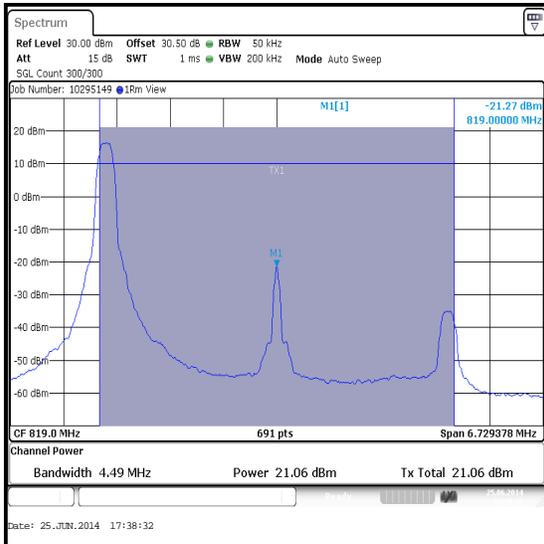

QPSK / 1 Resource Block (0 Offset)

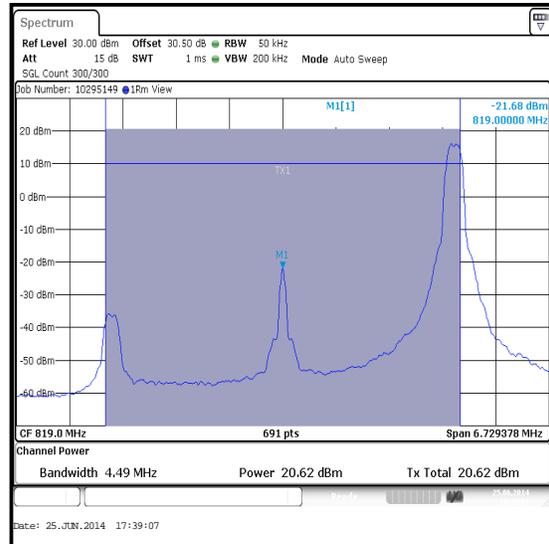


QPSK / 1 Resource Block (24 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 5 MHz Channel Bandwidth / Middle Channel / 16QAM


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	25	0	17.0	-3.85	13.15	50.0	36.85	Complied
819.0	12	6	16.9	-3.85	13.05	50.0	36.95	Complied
819.0	1	0	19.8	-3.85	15.95	50.0	34.05	Complied
819.0	1	24	19.7	-3.85	15.85	50.0	34.15	Complied

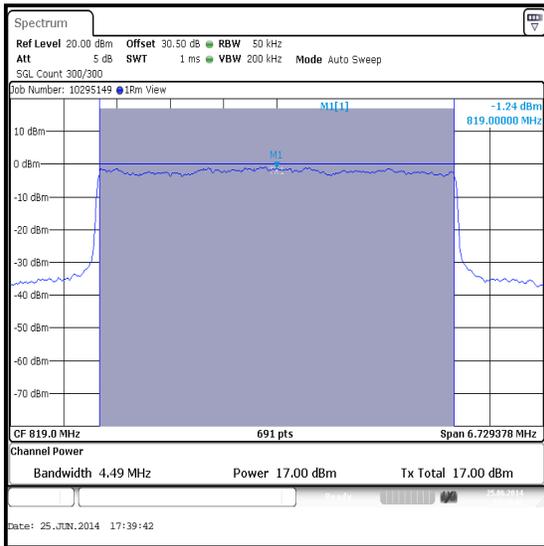


16QAM / 25 Resource Blocks (0 Offset)

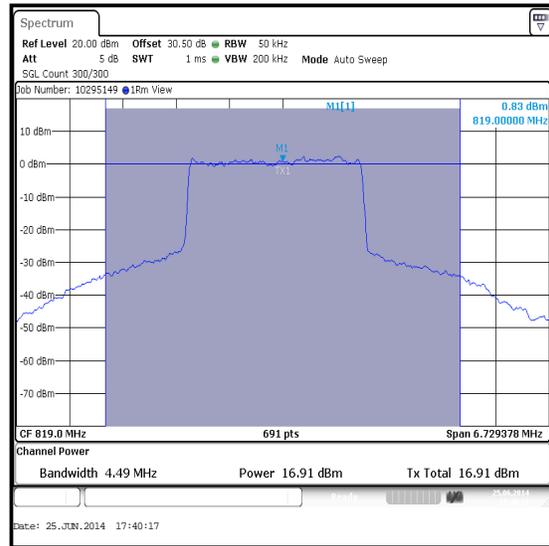

16QAM / 12 Resource Blocks (6 Offset)

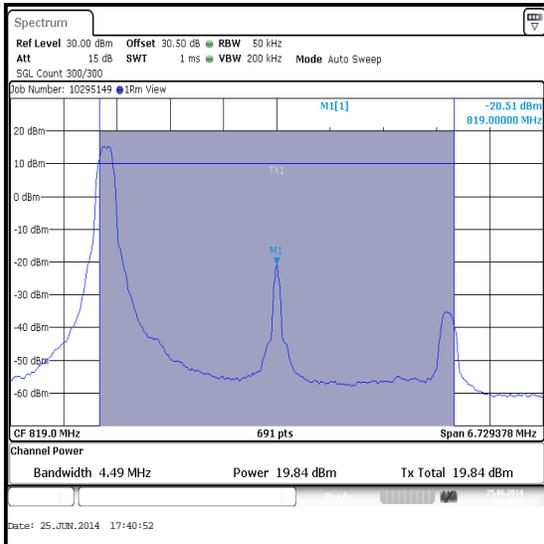

16QAM / 1 Resource Block (0 Offset)

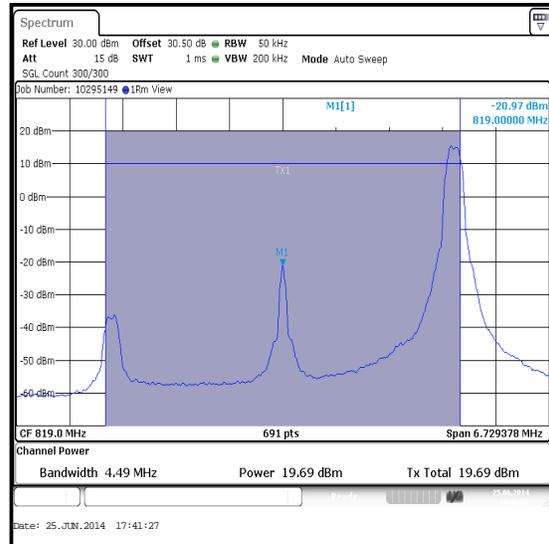


16QAM / 1 Resource Block (24 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 5 MHz Channel Bandwidth / Top Channel / QPSK


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
821.5	25	0	18.1	-3.85	14.25	50.0	35.75	Complied
821.5	12	6	17.8	-3.85	13.95	50.0	36.05	Complied
821.5	1	0	21.1	-3.85	17.25	50.0	32.75	Complied
821.5	1	24	20.7	-3.85	16.85	50.0	33.15	Complied

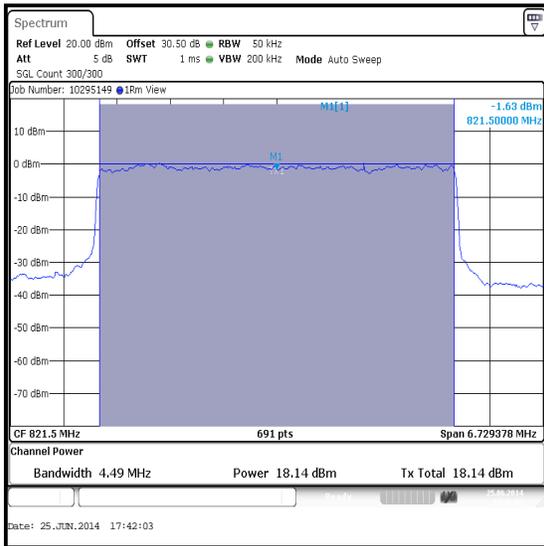


QPSK / 25 Resource Blocks (0 Offset)

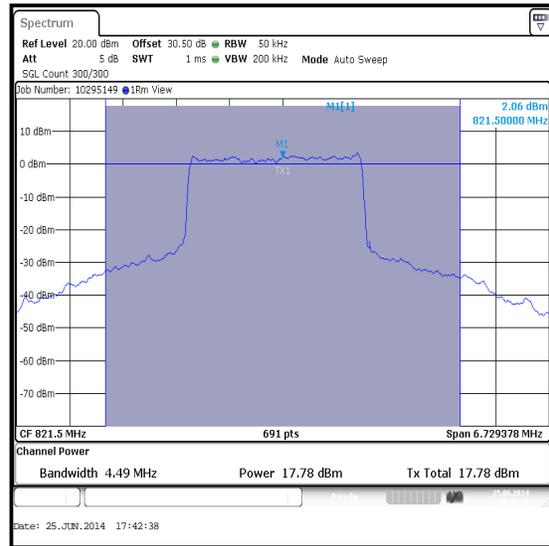

QPSK / 12 Resource Blocks (6 Offset)

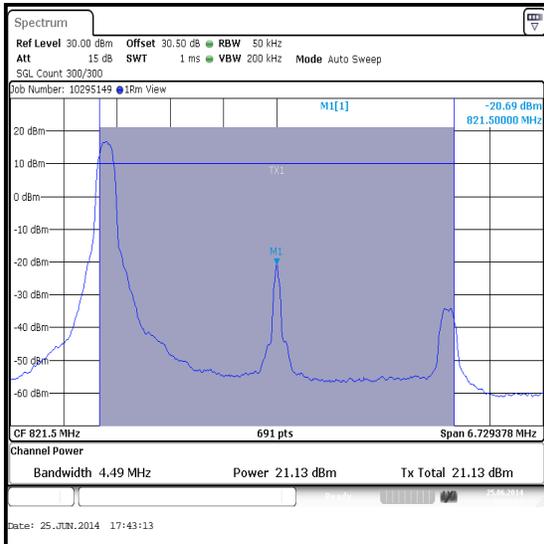

QPSK / 1 Resource Block (0 Offset)

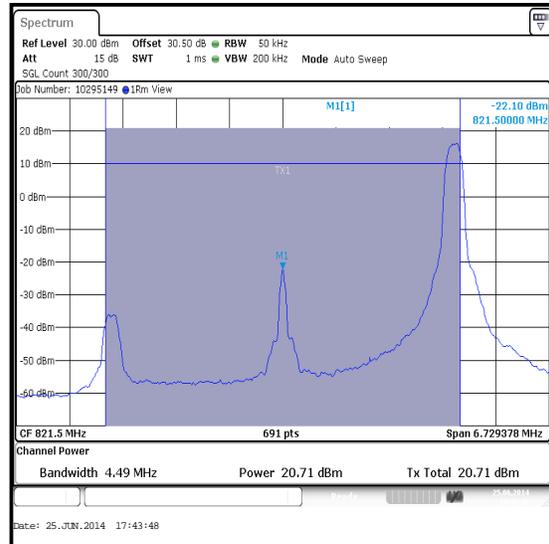


QPSK / 1 Resource Block (24 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 5 MHz Channel Bandwidth / Top Channel / 16QAM


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
821.5	25	0	17.0	-3.85	13.15	50.0	36.85	Complied
821.5	12	6	16.9	-3.85	13.05	50.0	36.95	Complied
821.5	1	0	19.7	-3.85	15.85	50.0	34.15	Complied
821.5	1	24	19.3	-3.85	15.45	50.0	34.55	Complied

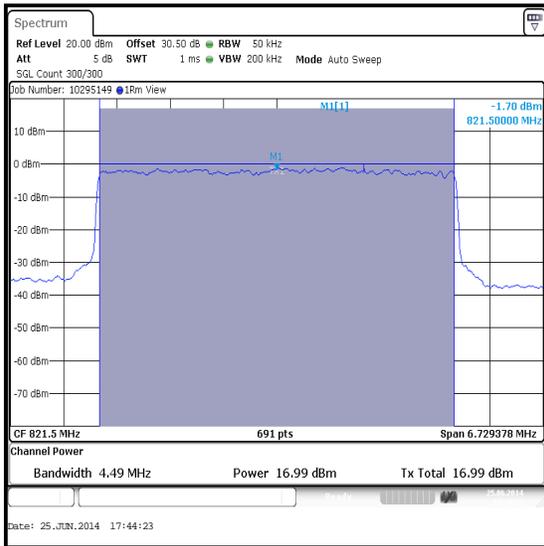


16QAM / 25 Resource Blocks (0 Offset)

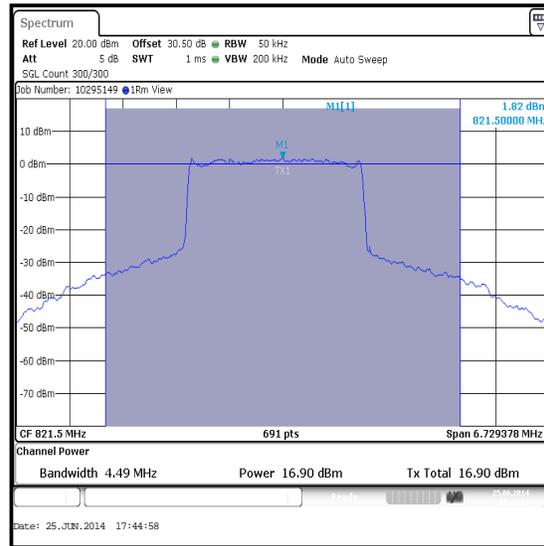

16QAM / 12 Resource Blocks (6 Offset)

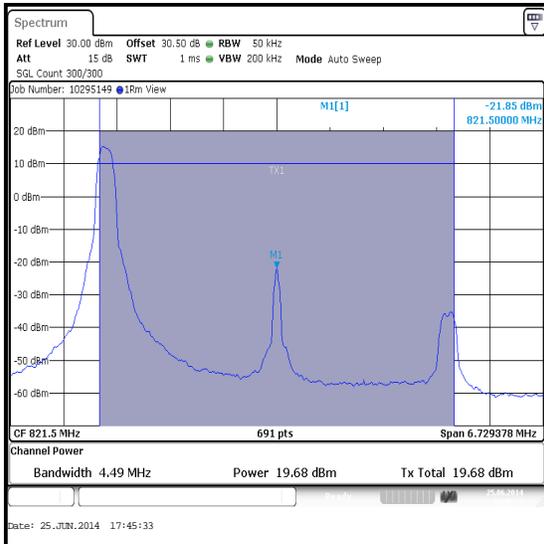

16QAM / 1 Resource Block (0 Offset)

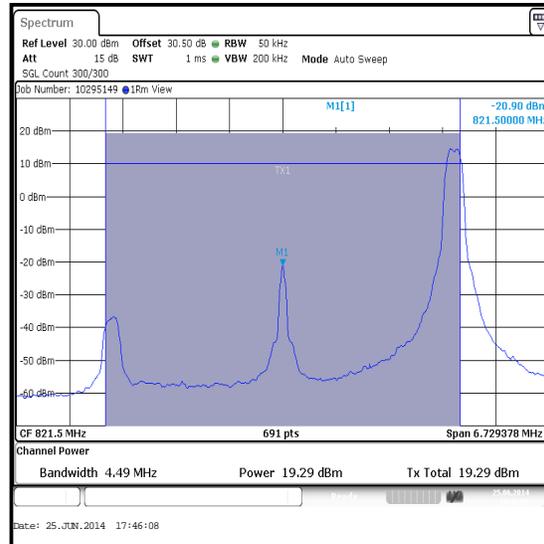


16QAM / 1 Resource Block (24 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 10 MHz Channel Bandwidth / Middle Channel / QPSK


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	50	0	18.6	-3.85	14.75	50.0	35.25	Complied
819.0	25	12	18.5	-3.85	14.65	50.0	35.35	Complied
819.0	1	0	21.0	-3.85	17.15	50.0	32.85	Complied
819.0	1	49	21.0	-3.85	17.15	50.0	32.85	Complied

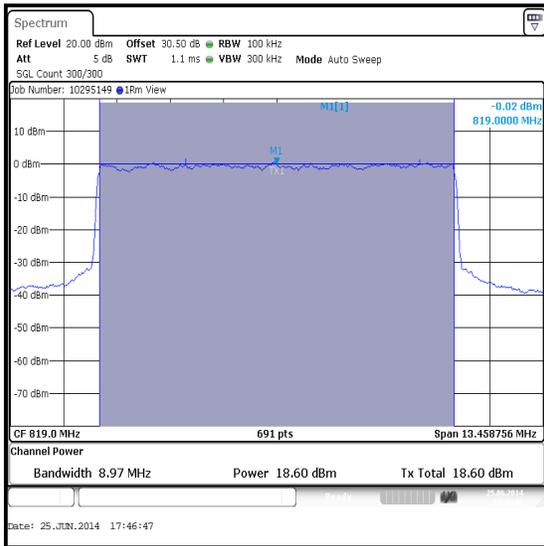


QPSK / 50 Resource Blocks (0 Offset)

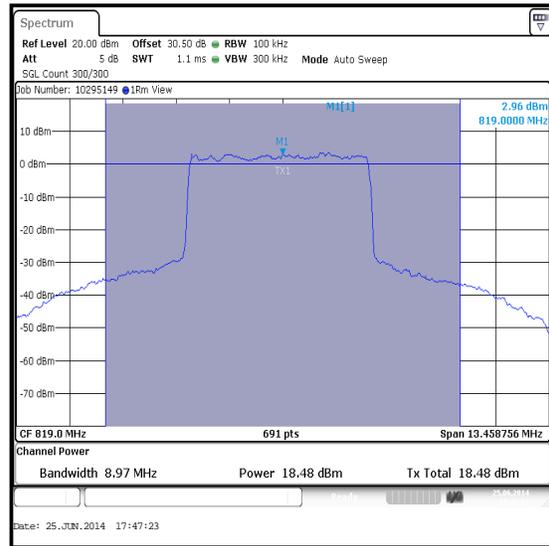

QPSK / 25 Resource Blocks (12 Offset)

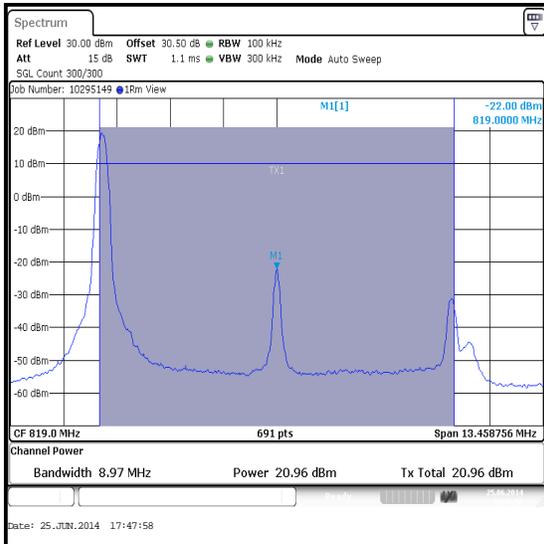

QPSK / 1 Resource Block (0 Offset)

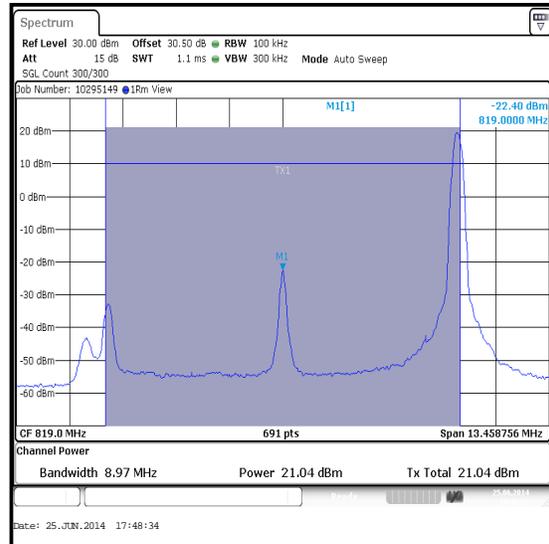


QPSK / 1 Resource Block (49 Offset)


Transmitter Carrier Output Power and Effective Radiated Power (ERP)

Results: 10 MHz Channel Bandwidth / Middle Channel / 16QAM


Frequency (MHz)	Resource Block(s)	Resource Block Offset	Conducted RF Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
819.0	50	0	17.5	-3.85	13.65	50.0	36.35	Complied
819.0	25	12	17.4	-3.85	13.55	50.0	36.45	Complied
819.0	1	0	18.8	-3.85	14.95	50.0	35.05	Complied
819.0	1	49	19.3	-3.85	15.45	50.0	34.55	Complied

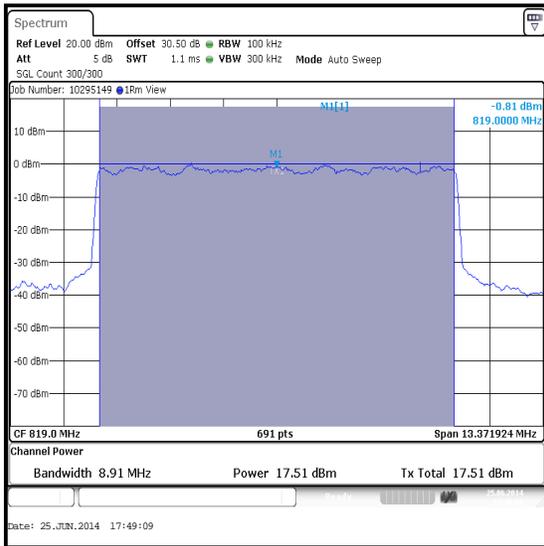


16QAM / 50 Resource Blocks (0 Offset)

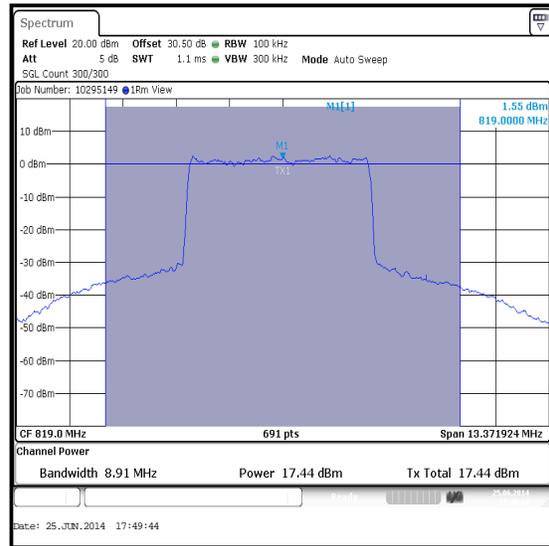

16QAM / 25 Resource Blocks (12 Offset)

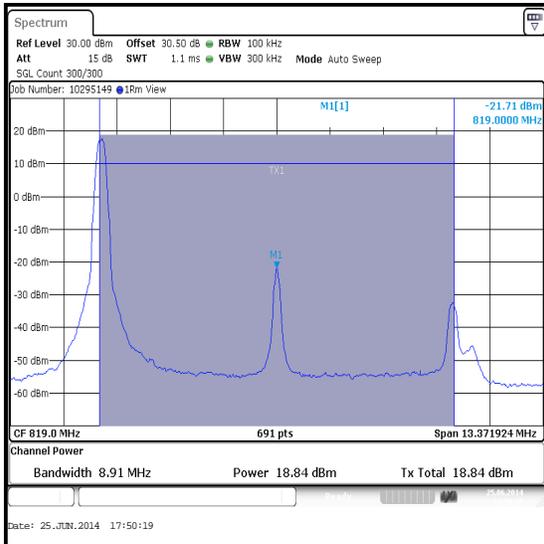

16QAM / 1 Resource Block (0 Offset)

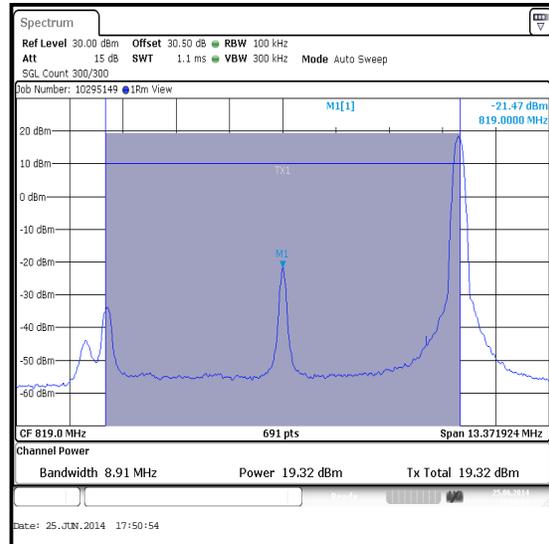

16QAM / 1 Resource Block (49 Offset)

Transmitter Carrier Output Power and Effective Radiated Power (ERP) (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1659	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	14 Mar 2015	12
L1127	Signal Analyser	Rohde & Schwarz	FSV13	100863	24 Apr 2015	12
A2535	Directional Coupler	AtlanTecRF	CDC-003060-20	14041701719	Calibrated before use	-
A2508	Attenuator	AtlanTecRF	AN18-10	821846#3	Calibrated before use	-
S0557	DC Power Supply	TTI	EL303R	395819	Calibrated before use	-
M1251	Digital Multimeter	Fluke	175	8717019	19 May 2015	12
G0608	Signal Generator	Rohde & Schwarz	SMIQ 06B	838341/033	14 Feb 2015	12
M1009	Power Meter	Hewlett Packard	437B	3125U13706	04 Feb 2015	12
M1592	Power Sensor	Hewlett Packard	8487A	3318A02094	28 Aug 2014	12

5.2.2. Transmitter Occupied Bandwidth**Test Summary:**

Test Engineer:	Nick Steele	Test Date:	25 June 2014
Test Sample IMEI:	004402452690567		

FCC Reference:	Parts 90.209(b)(7) and 2.1049
Test Method Used:	As detailed in KDB 971168 D01 Section 4.2

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	39

Note(s):

1. Occupied bandwidth (99% bandwidth) was measured using a test receiver occupied bandwidth function.
2. Measurements were performed with the EUT transmitting with QPSK and 16QAM modulation schemes, with resource blocks settings as detailed in section 4.3 of this report.
3. The RF port of the EUT was connected to the spectrum analyser via RF cables, directional coupler and suitable attenuation.

Transmitter Occupied Bandwidth (continued)

Results: 1.4 MHz Channel Bandwidth / Bottom Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
814.7	6	0	20	100	1.086
814.7	3	2	20	100	0.588



QPSK / 6 Resource Blocks (0 Offset)




QPSK / 3 Resource Blocks (2 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 1.4 MHz Channel Bandwidth / Bottom Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
814.7	6	0	20	100	1.094
814.7	3	2	20	100	0.579

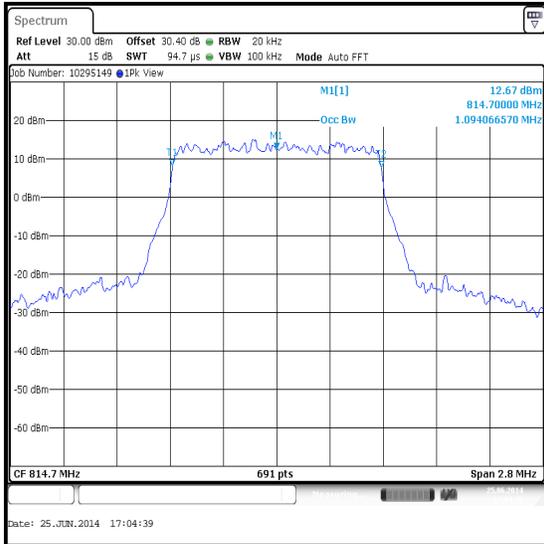

16QAM / 6 Resource Blocks (0 Offset)



16QAM / 3 Resource Blocks (2 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 1.4 MHz Channel Bandwidth / Middle Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	6	0	20	100	1.094
819.0	3	2	20	100	0.575



QPSK / 6 Resource Blocks (0 Offset)




QPSK / 3 Resource Blocks (2 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 1.4 MHz Channel Bandwidth / Middle Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	6	0	20	100	1.078
819.0	3	2	20	100	0.600

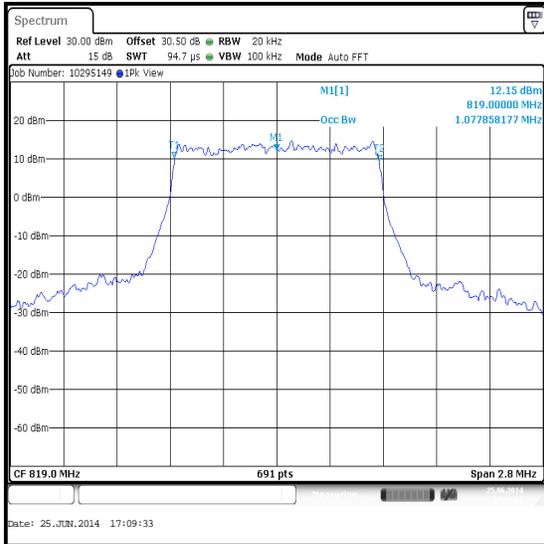

16QAM / 6 Resource Blocks (0 Offset)



16QAM / 3 Resource Blocks (2 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 1.4 MHz Channel Bandwidth / Top Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
823.3	6	0	20	100	1.090
823.3	3	2	20	100	0.579



QPSK / 6 Resource Blocks (0 Offset)



QPSK / 3 Resource Blocks (2 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 1.4 MHz Channel Bandwidth / Top Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
823.3	6	0	20	100	1.090
823.3	3	2	20	100	0.600



16QAM / 6 Resource Blocks (0 Offset)




16QAM / 3 Resource Blocks (2 Offset)


Transmitter Occupied Bandwidth (continued)

Results: 3 MHz Channel Bandwidth / Bottom Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
815.5	15	0	30	100	2.683
815.5	8	4	30	100	1.467

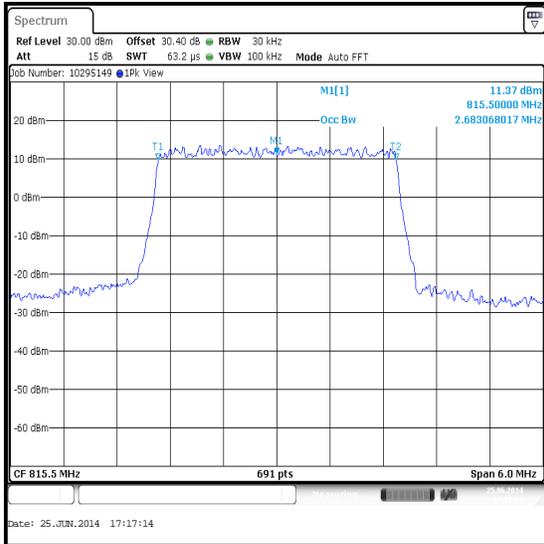

QPSK / 15 Resource Blocks (0 Offset)

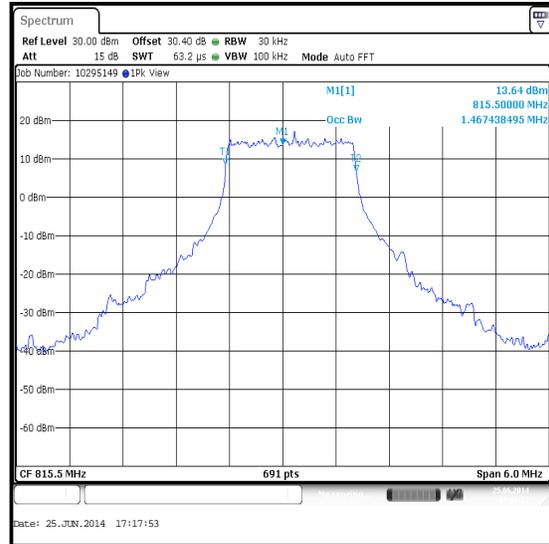


QPSK / 8 Resource Blocks (4 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 3 MHz Channel Bandwidth / Bottom Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
815.5	15	0	30	100	2.692
815.5	8	4	30	100	1.467

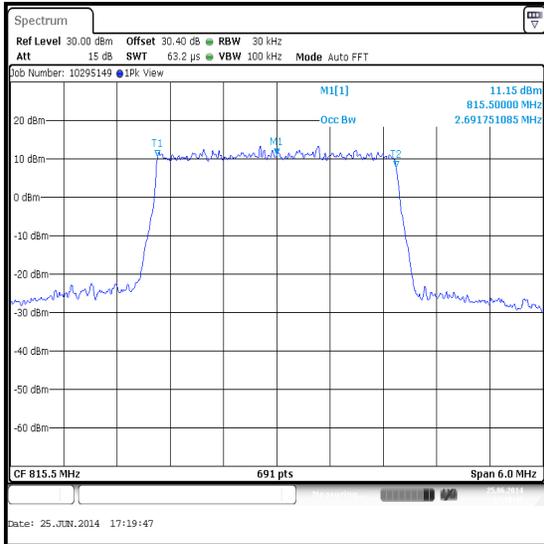

16QAM / 15 Resource Blocks (0 Offset)




16QAM / 8 Resource Blocks (4 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 3 MHz Channel Bandwidth / Middle Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	15	0	30	100	2.692
819.0	8	4	30	100	1.467

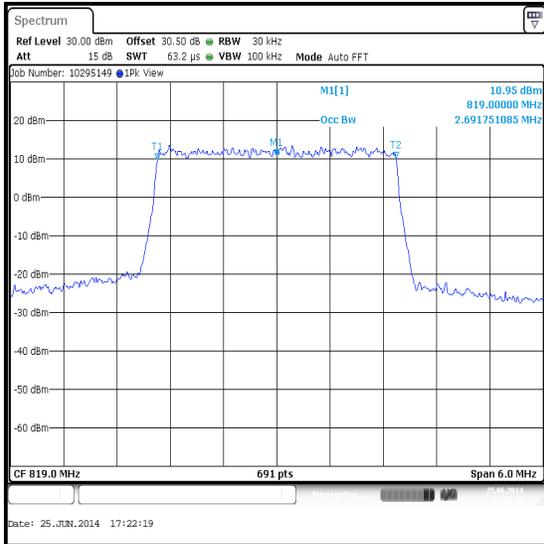

QPSK / 15 Resource Blocks (0 Offset)




QPSK / 8 Resource Blocks (4 Offset)


Transmitter Occupied Bandwidth (continued)

Results: 3 MHz Channel Bandwidth / Middle Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	15	0	30	100	2.674
819.0	8	4	30	100	1.485

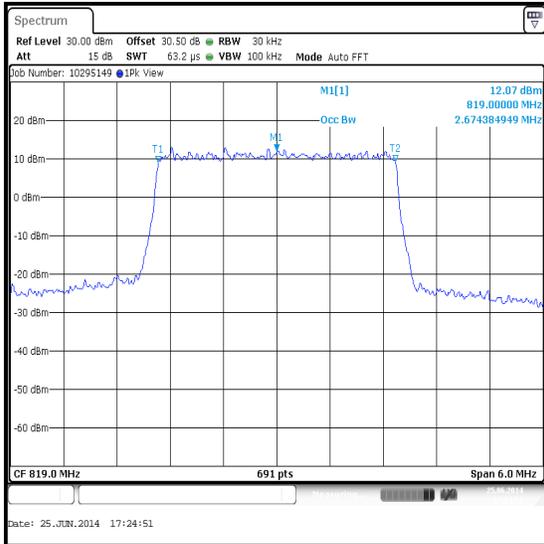

16QAM / 15 Resource Blocks (0 Offset)

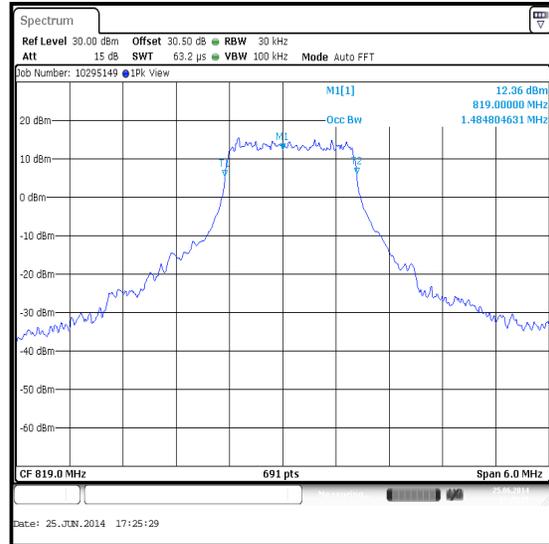


16QAM / 8 Resource Blocks (4 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 3 MHz Channel Bandwidth / Top Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
822.5	15	0	30	100	2.683
822.5	8	4	30	100	1.476

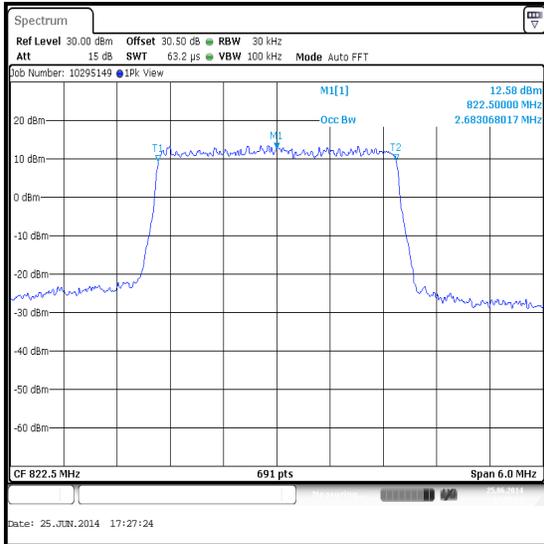

QPSK / 15 Resource Blocks (0 Offset)




QPSK / 8 Resource Blocks (4 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 3 MHz Channel Bandwidth / Top Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
822.5	15	0	30	100	2.692
822.5	8	4	30	100	1.485

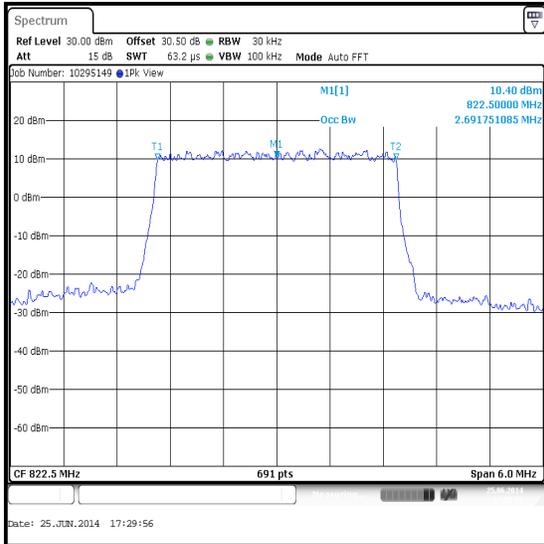

16QAM / 15 Resource Blocks (0 Offset)




16QAM / 8 Resource Blocks (4 Offset)


Transmitter Occupied Bandwidth (continued)

Results: 5 MHz Channel Bandwidth / Bottom Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
816.5	25	0	50	200	4.486
816.5	12	6	50	200	2.229

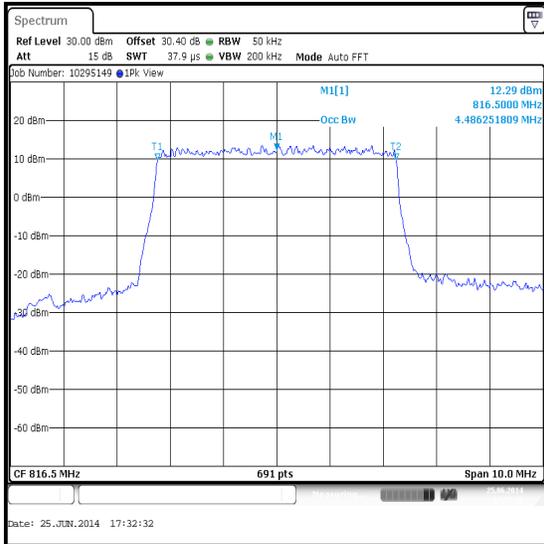

QPSK / 25 Resource Blocks (0 Offset)

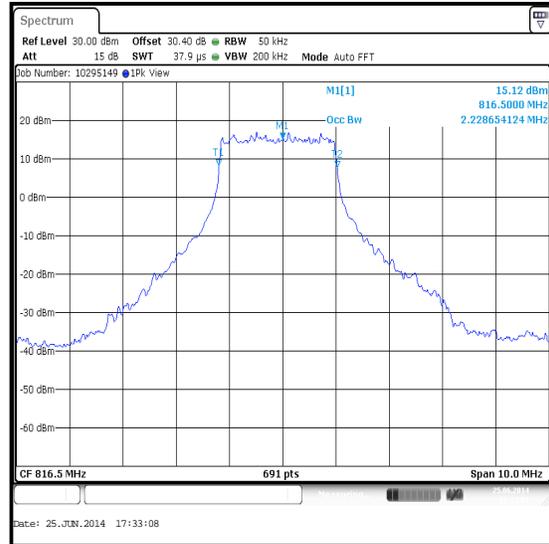


QPSK / 12 Resource Blocks (6 Offset)


Transmitter Occupied Bandwidth (continued)

Results: 5 MHz Channel Bandwidth / Bottom Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
816.5	25	0	50	200	4.486
816.5	12	6	50	200	2.214

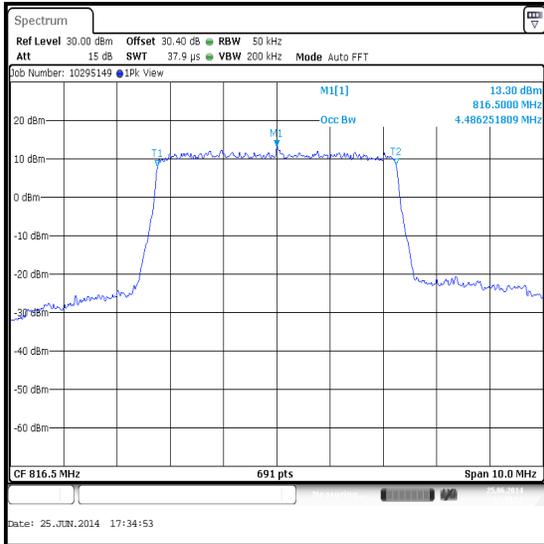

16QAM / 25 Resource Blocks (0 Offset)

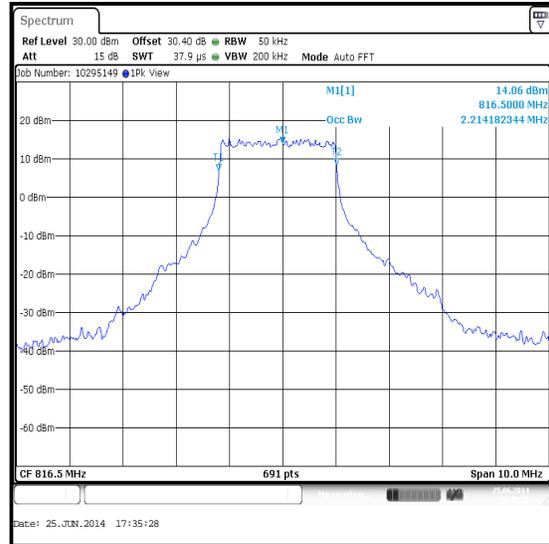


16QAM / 12 Resource Blocks (6 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 5 MHz Channel Bandwidth / Middle Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	25	0	50	200	4.486
819.0	12	6	50	200	2.200

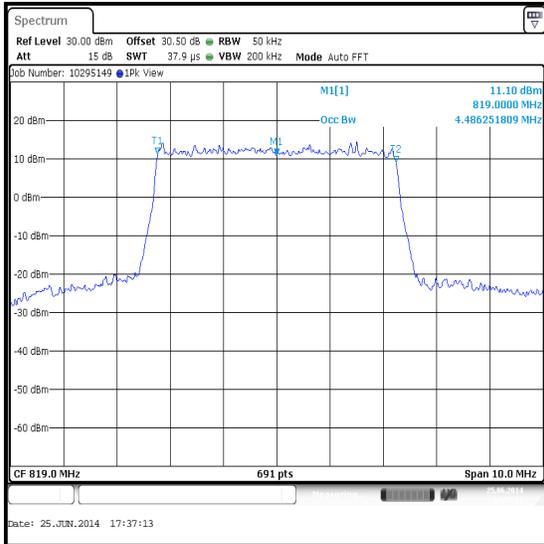

QPSK / 25 Resource Blocks (0 Offset)




QPSK / 12 Resource Blocks (6 Offset)


Transmitter Occupied Bandwidth (continued)

Results: 5 MHz Channel Bandwidth / Middle Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	25	0	50	200	4.486
819.0	12	6	50	200	2.200

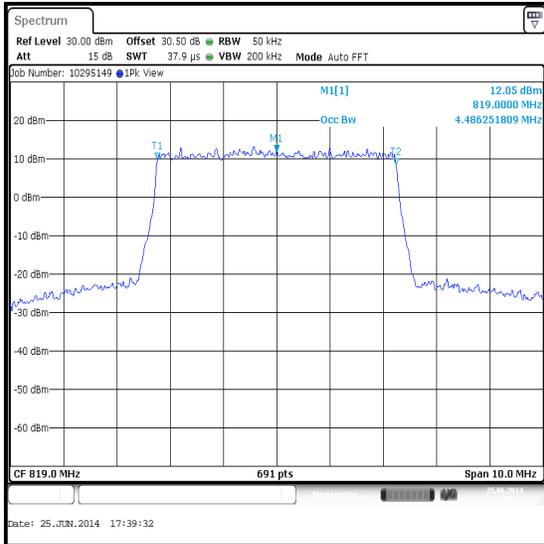

16QAM / 25 Resource Blocks (0 Offset)

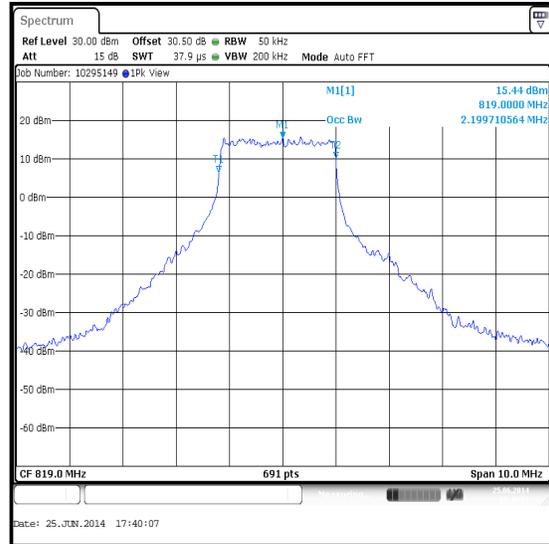

16QAM / 12 Resource Blocks (6 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 5 MHz Channel Bandwidth / Top Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
821.5	25	0	50	200	4.486
821.5	12	6	50	200	2.200



QPSK / 25 Resource Blocks (0 Offset)




QPSK / 12 Resource Blocks (6 Offset)

Transmitter Occupied Bandwidth (continued)

Results: 5 MHz Channel Bandwidth / Top Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
821.5	25	0	50	200	4.486
821.5	12	6	50	200	2.214

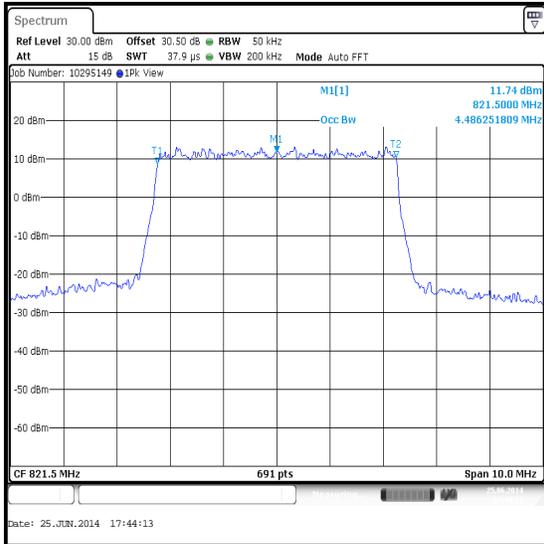

16QAM / 25 Resource Blocks (0 Offset)




16QAM / 12 Resource Blocks (6 Offset)


Transmitter Occupied Bandwidth (continued)

Results: 10 MHz Channel Bandwidth / Middle Channel / QPSK

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	50	0	100	300	8.973
819.0	25	12	100	300	4.544

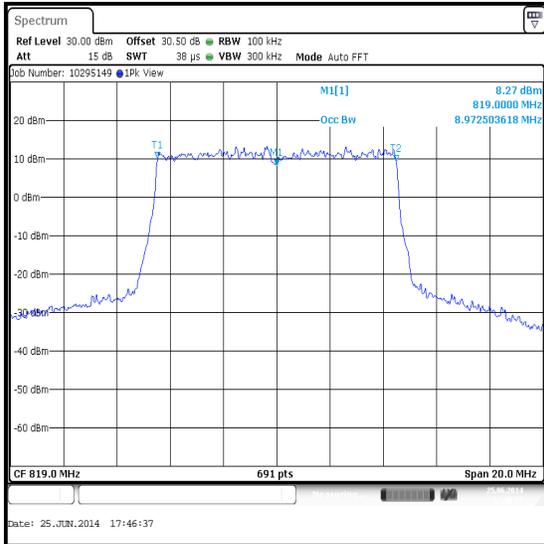

QPSK / 50 Resource Blocks (0 Offset)

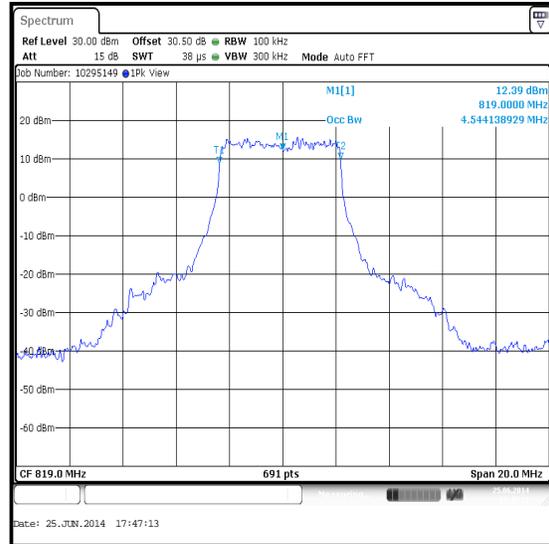


QPSK / 25 Resource Blocks (12 Offset)


Transmitter Occupied Bandwidth (continued)

Results: 10 MHz Channel Bandwidth / Middle Channel / 16QAM

Frequency (MHz)	Resource Block(s)	Resource Block Offset	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (MHz)
819.0	50	0	100	300	8.915
819.0	25	12	100	300	4.573

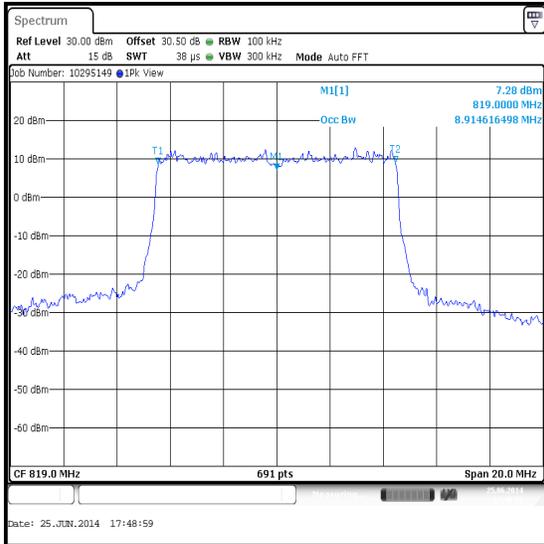

16QAM / 50 Resource Blocks (0 Offset)

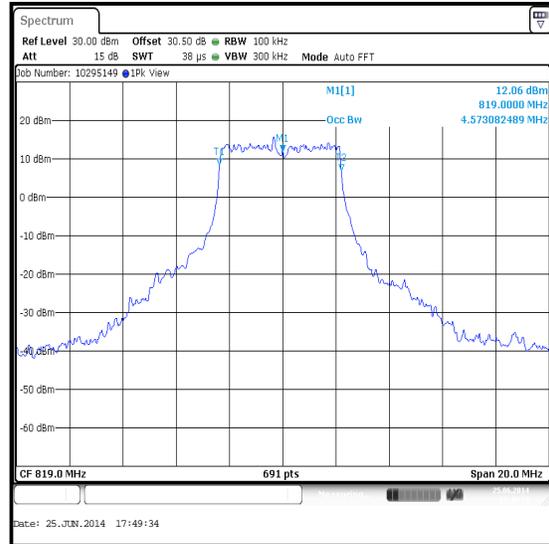

16QAM / 25 Resource Blocks (12 Offset)

Transmitter Occupied Bandwidth (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1659	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	14 Mar 2015	12
L1127	Signal Analyser	Rohde & Schwarz	FSV13	100863	24 Apr 2015	12
A2535	Directional Coupler	AtlanTecRF	CDC-003060-20	14041701719	Calibrated before use	-
A2508	Attenuator	AtlanTecRF	AN18-10	821846#3	Calibrated before use	-
S0557	DC Power Supply	TTI	EL303R	395819	Calibrated before use	-
M1251	Digital Multimeter	Fluke	175	8717019	19 May 2015	12
G0608	Signal Generator	Rohde & Schwarz	SMIQ 06B	838341/033	14 Feb 2015	12
M1009	Power Meter	Hewlett Packard	437B	3125U13706	04 Feb 2015	12
M1592	Power Sensor	Hewlett Packard	8487A	3318A02094	28 Aug 2014	12

5.2.3. Transmitter Radiated Emissions**Test Summary:**

Test Engineer:	Andrew Edwards	Test Dates:	26 June 2014 & 30 June 2014
Test Sample IMEI:	004402452687654		

FCC Reference:	Parts 90.691 and 2.1053
Test Method Used:	KDB 971168 Section 6.1 referencing FCC Part 2.1053
Frequency Range:	30 MHz to 9 GHz
Configuration:	1.4 MHz, QPSK, 1RB, 0 Offset

Environmental Conditions:

Temperature (°C):	24 to 26
Relative Humidity (%):	30 to 36

Note(s):

1. The EUT was set to transmit with a 1.4 MHz channel bandwidth with QPSK modulation applied and 1 resource block with 0 offset, as this was found to be the worst case modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest transmit output power level, it was deemed to be the worst case.
2. The emission seen on the 30 MHz to 1 GHz plot at approximately 823.3 MHz is the EUT carrier.
3. All other emissions were at least 20 dB below the specification limit or below the measurement system noise floor.
4. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
5. Pre-scans above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Transmitter Radiated Emissions (continued)**Results: Bottom channel**

Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
823.447	-32.6	-13.0	19.6	Complied





Results: Middle channel

Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
827.623	-34.7	-13.0	21.7	Complied


Results: Top channel

Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
831.988	-36.6	-13.0	23.6	Complied

Transmitter Radiated Emissions (continued)

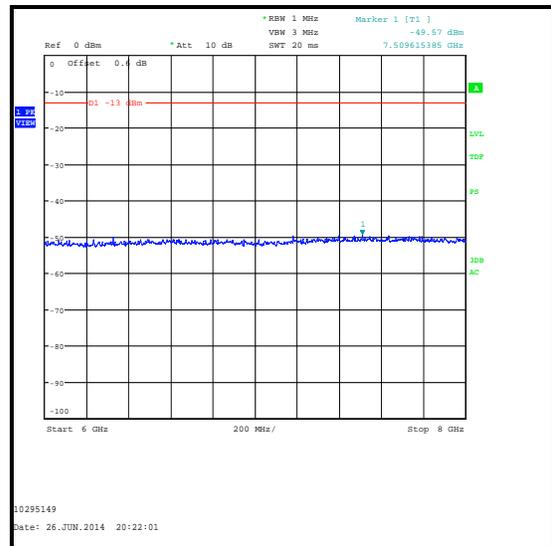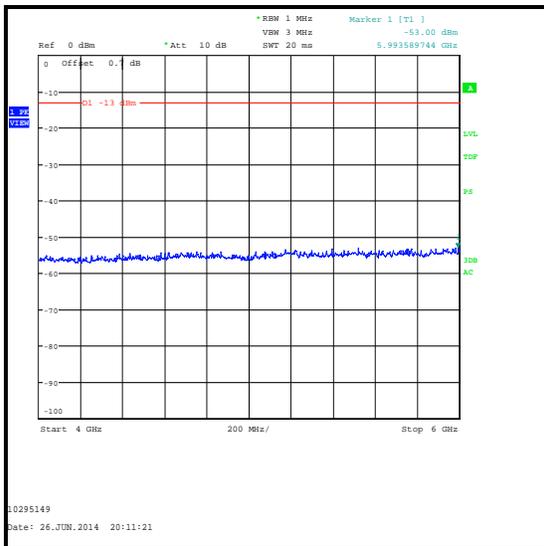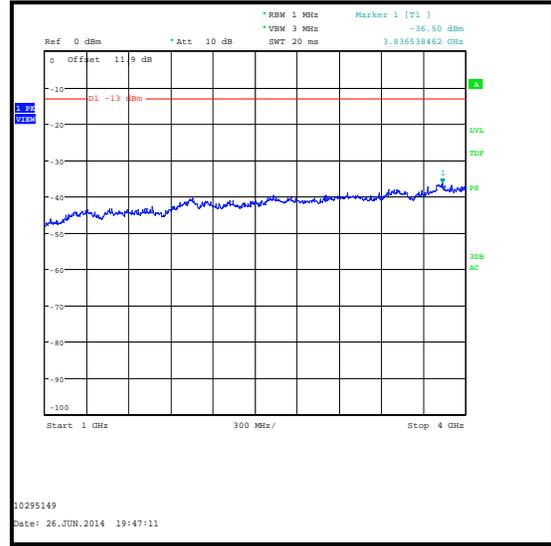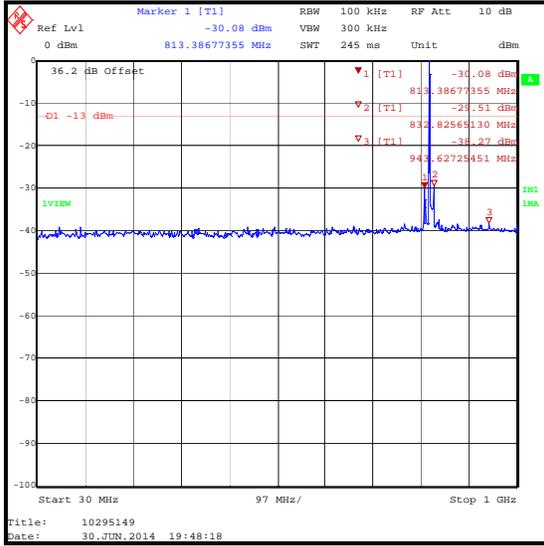

Transmitter Radiated Emissions (continued)

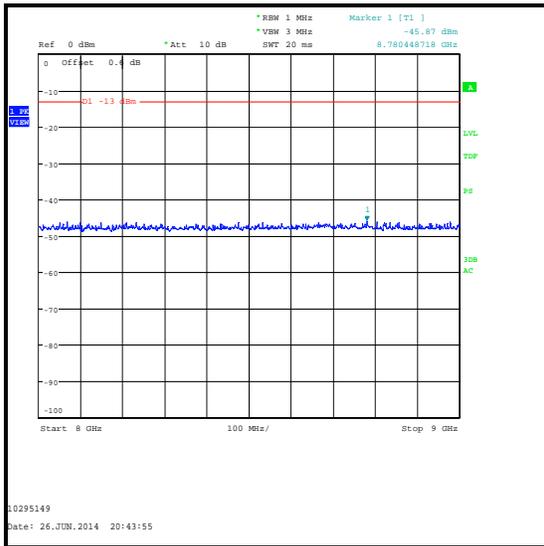

Transmitter Radiated Emissions (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1622	Thermohygrometer	JM Handelspunkt	30.5015.06	Not stated	31 Dec 2014	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	26 Nov 2014	12
M1273	Test Receiver	Rohde & Schwarz	ESIB26	100275	15 Feb 2014	12
G0543	Pre-Amplifier	Sonoma	310N	230801	19 Aug 2014	3
A490	Antenna	Chase	CBL6111A	1590	29 Apr 2015	12
A1834	Attenuator	Hewlett Packard	8491B	10444	15 Nov 2014	12
A2142	Attenuator	AtlanTecRF	AN18-20	081120-23	25 Apr 2015	12
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	Not stated	14 Mar 2015	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	14 Nov 2014	12
M1874	Test Receiver	Rohde & Schwarz	ESU26	100553	13 May 2015	12
A1534	Pre-Amplifier	Hewlett Packard	8449B	3008A00405	18 May 2015	12
A1818	Antenna	EMCO	3115	00075692	14 Nov 2014	12
A253	Antenna	Flann Microwave	12240-20	128	14 Nov 2014	12
A254	Antenna	Flann Microwave	14240-20	139	14 Nov 2014	12
A255	Antenna	Flann Microwave	16240-20	519	14 Nov 2014	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	02 May 2015	12
A1974	High pass filter	AtlanTecRF	AFH-01000	090000283	12 May 2015	12
A2468	High pass filter	Wainwright Instruments GmbH	WHKX12-935-1000-15000-40SS	2	20 Feb 2015	12
A1936	Antenna	Schwarzbeck Mess - Elektronik	UBAA 9114	9114-223	07 May 2017	36
A2147	Attenuator	AtlanTecRF	AN18-06	09020206-06	Calibrated before use	-
M260	Signal Generator	Rohde & Schwarz	SMP02	829076/008	24 Apr 2015	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	08 Apr 2016	24
M1267	Power Sensor	Rohde & Schwarz	NRV-Z52	100155	23 Apr 2016	24

5.2.4. Transmitter Radiated Emissions at Band Edges**Test Summary:**

Test Engineer:	Nick Steele	Test Date:	01 July 2014
Test Sample IMEI:	004402452687712		

FCC Reference:	Parts 90.691 and 2.1053
Test Method Used:	As detailed in KDB 971168 Section 6.1 referencing FCC Part 2.1053

Environmental Conditions:

Temperature (°C):	21
Relative Humidity (%):	43


Note(s):

1. Measurements were performed with the EUT transmitting with QPSK and 16QAM modulation schemes, with resource blocks settings as detailed in section 4.3 of this report.


Transmitter Radiated Emissions at Band Edges (continued)

Results: 1.4 MHz Channel Bandwidth / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	6	0	-29.1	-20.0	9.1	Complied
824	6	0	-32.5	-20.0	12.5	Complied

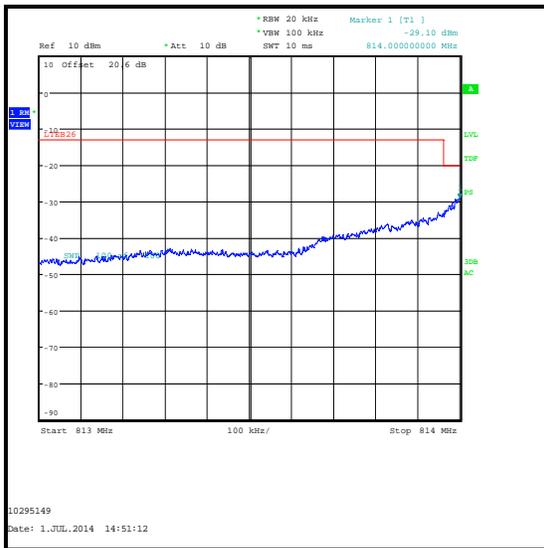

QPSK / Lower Band Edge

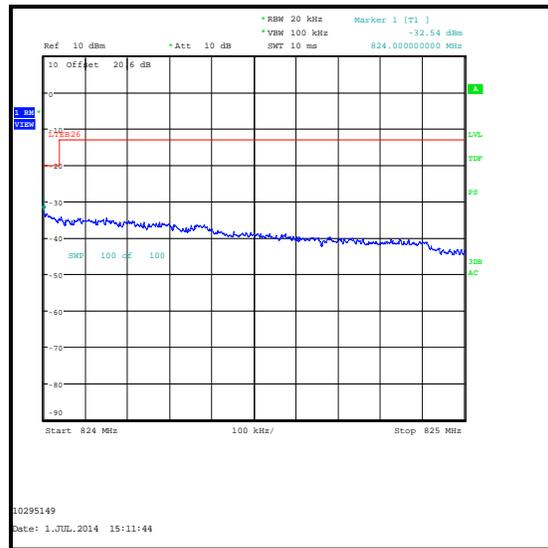

QPSK / Upper Band Edge


Transmitter Radiated Emissions at Band Edges (continued)

Results: 1.4 MHz Channel Bandwidth / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	6	0	-32.0	-20.0	12.0	Complied
824	6	0	-33.4	-20.0	13.4	Complied



16QAM / Lower Band Edge

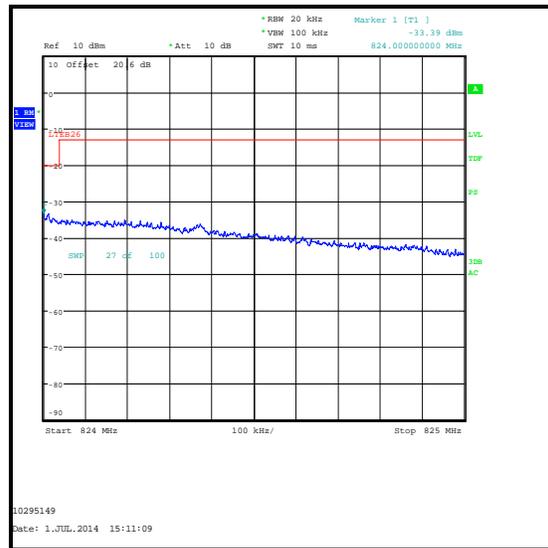


16QAM / Upper Band Edge


Transmitter Radiated Emissions at Band Edges (continued)

Results: 3 MHz Channel Bandwidth / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	15	0	-31.3	-20.0	11.3	Complied
824	15	0	-33.8	-20.0	13.8	Complied

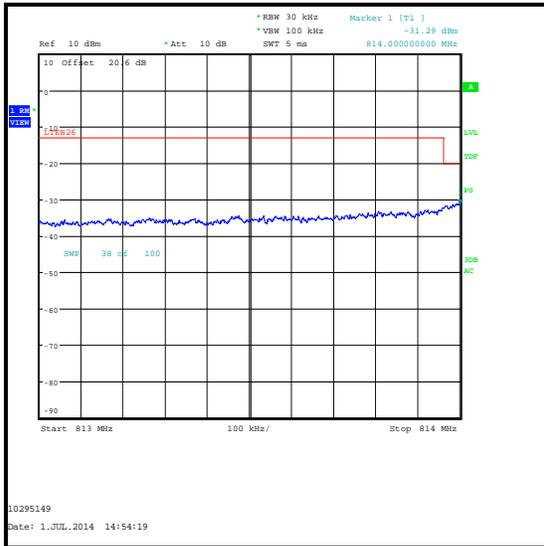

QPSK / Lower Band Edge

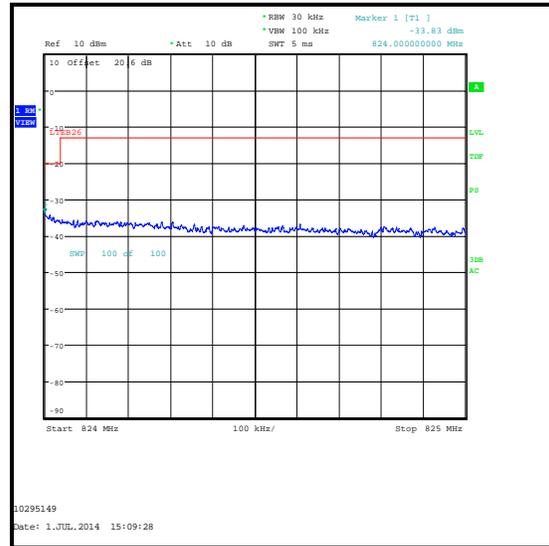


QPSK / Upper Band Edge


Transmitter Radiated Emissions at Band Edges (continued)

Results: 3 MHz Channel Bandwidth / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	15	0	-33.5	-20.0	13.5	Complied
824	15	0	-34.2	-20.0	14.2	Complied

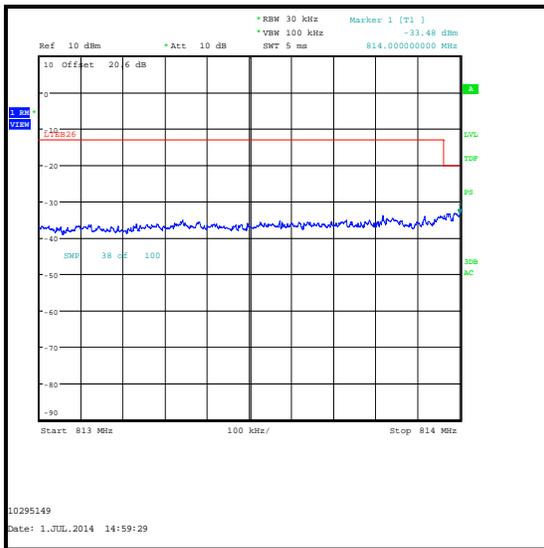

16QAM / Lower Band Edge

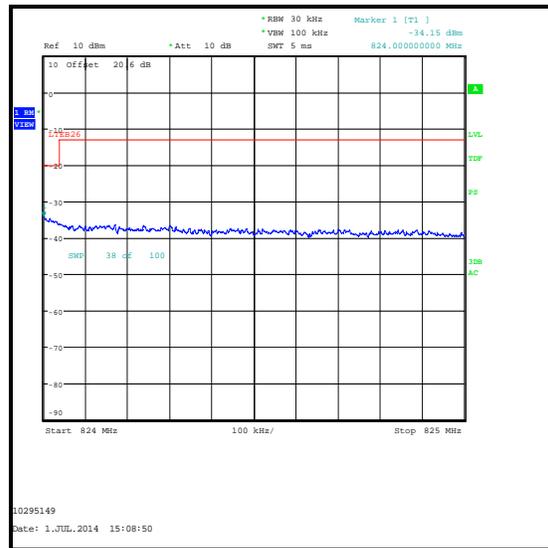

16QAM / Upper Band Edge


Transmitter Radiated Emissions at Band Edges (continued)

Results: 5 MHz Channel Bandwidth / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	25	0	-32.6	-20.0	12.6	Complied
824	25	0	-35.7	-20.0	15.7	Complied



QPSK / Lower Band Edge

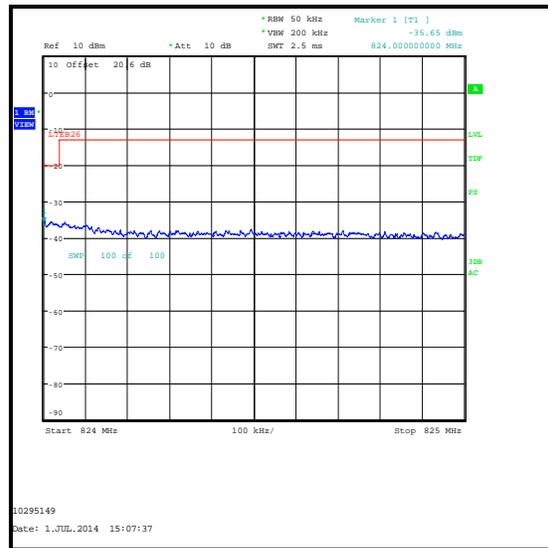

QPSK / Upper Band Edge


Transmitter Radiated Emissions at Band Edges (continued)

Results: 5 MHz Channel Bandwidth / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	25	0	-34.5	-20.0	14.5	Complied
824	25	0	-36.4	-20.0	16.4	Complied



16QAM / Lower Band Edge

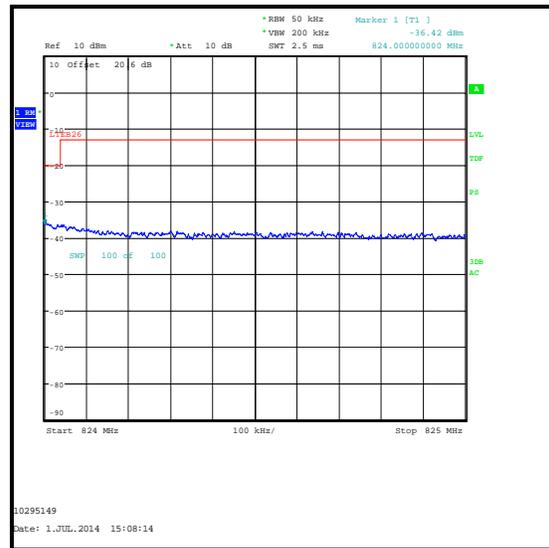


16QAM / Upper Band Edge


Transmitter Radiated Emissions at Band Edges (continued)

Results: 10 MHz Channel Bandwidth / QPSK

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	50	0	-31.7	-20.0	11.7	Complied
824	50	0	-31.6	-20.0	11.6	Complied

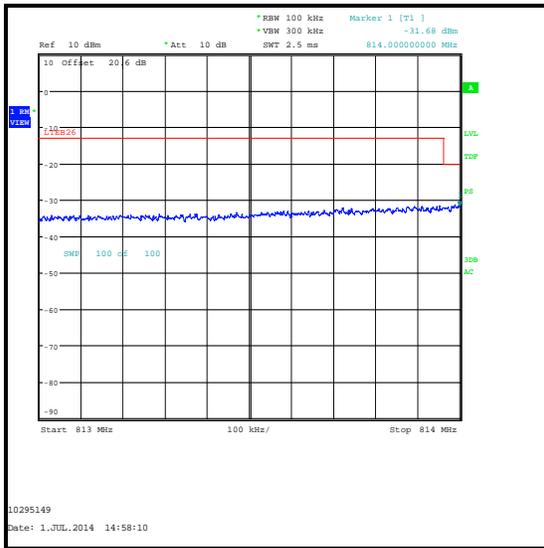

QPSK / Lower Band Edge

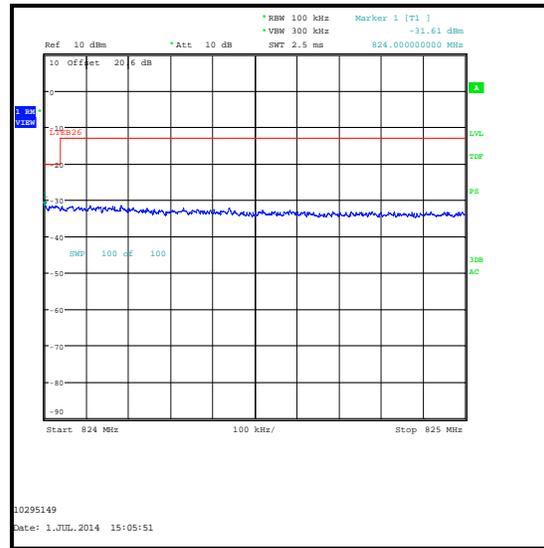


QPSK / Upper Band Edge


Transmitter Radiated Emissions at Band Edges (continued)

Results: 10 MHz Channel Bandwidth / 16QAM

Frequency (MHz)	Resource Blocks	Resource Block Offset	Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
814	50	0	-32.8	-20.0	12.8	Complied
824	50	0	-32.7	-20.0	12.7	Complied

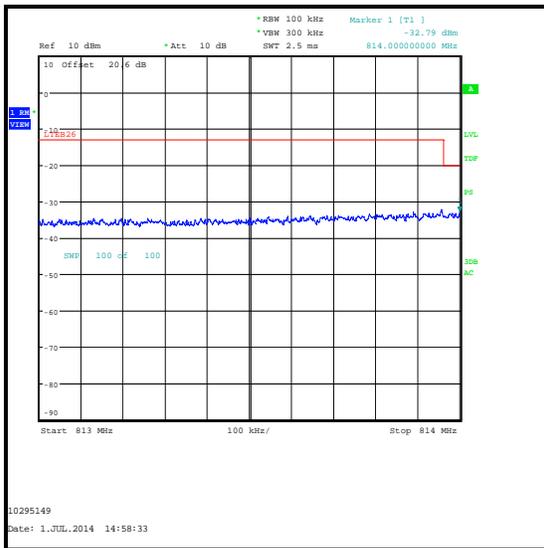

16QAM / Lower Band Edge

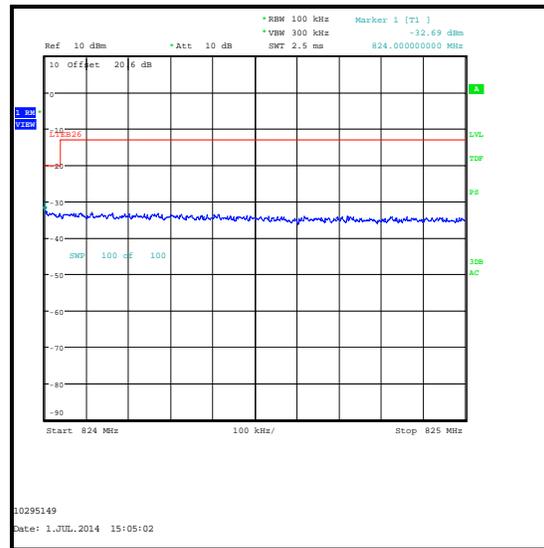

16QAM / Upper Band Edge

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelpunkt	30.5015.13	None stated	14 Mar 2015	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	14 Nov 2014	12
M1874	Test Receiver	Rohde & Schwarz	ESU26	100553	13 May 2015	12
A288	Antenna	Chase	CBL6111A	1589	20 Aug 2014	12
A1393	Attenuator	Huber & Suhner	6820.17.B	757456	02 May 2015	12

5.2.5. Transmitter Frequency Stability (Temperature Variation)**Test Summary:**

Test Engineer:	Mark Percival	Test Date:	25 June 2014
Test Sample IMEI:	004402452690575		

FCC Reference:	Parts 90.213 and 2.1055
Test Method Used:	As detailed in KDB 971168 Section 9.0 referencing ANSI TIA-603-C-2004 Section 2.2.2 and FCC Part 2.1055

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	36

Note(s):

1. A voltage variation jig was connected to the EUT which was powered via a bench power supply at the nominal voltage of 3.8V.
2. Frequency error was measured using a calibrated Rohde & Schwarz CMW 500 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was connected by suitable RF cables to the CMW 500. A bi-directional communications link was established between the EUT and CMW 500. The frequency meter value was recorded.
3. Temperature was monitored throughout the test with a calibrated digital thermometer.

Results: Middle Channel (819.0 MHz)

Temperature (°C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	818.999995	5	0.0061	2.5	2.4939	Complied
-20	818.999994	6	0.0073	2.5	2.4927	Complied
-10	819.000004	4	0.0049	2.5	2.4951	Complied
0	819.000005	5	0.0061	2.5	2.4939	Complied
10	818.999996	4	0.0049	2.5	2.4951	Complied
20	818.999995	5	0.0061	2.5	2.4939	Complied
30	818.999994	6	0.0073	2.5	2.4927	Complied
40	818.999994	6	0.0073	2.5	2.4927	Complied
50	818.999994	6	0.0073	2.5	2.4927	Complied

Transmitter Frequency Stability (Temperature Variation) (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1659	Thermohygrometer	JM Handelspunkt	30.5015.13	None stated	14 Mar 2015	12
M1870	Wideband Radio Comms Tester	Rohde & Schwarz	CMW500	145919	05 May 2015	12
S021	Dual DC power supply	TTi	CPX200	061034	Calibrated before use	-
M1251	Multimeter	Fluke	175	89170179	19 May 2015	12
M1249	Thermometer	Fluke	52II	88800049	02 May 2015	12
E0513	Environmental Chamber	TAS	LT600 Series 3	23900506	Calibration not required	-

5.2.6. Transmitter Frequency Stability (Voltage Variation)**Test Summary:**

Test Engineer:	Mark Percival	Test Date:	25 June 2014
Test Sample IMEI:	004402452690575		

FCC Reference:	Parts 90.213 and 2.1055
Test Method Used:	As detailed in KDB 971168 Section 9.0 referencing ANSI TIA-603-C-2004 Section 2.2.2 and FCC Part 2.1055

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	36

Note(s):

1. A voltage variation jig was connected to the EUT which was powered via a bench power supply.
2. Frequency error was measured using a calibrated Rohde & Schwarz CMW 500 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was connected by suitable RF cables to the CMW 500. A bi-directional communications link was established between the EUT and CMW 500. The frequency meter value was recorded.
3. Voltage was monitored throughout the test with a calibrated digital voltmeter.

Results: Middle Channel (819.0 MHz)

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
3.42	818.999995	5	0.0061	2.5	2.4939	Complied
4.18	818.999994	6	0.0073	2.5	2.4927	Complied

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1659	Thermohygrometer	JM Handelpunkt	30.5015.13	None stated	14 Mar 2015	12
M1870	Wideband Radio Comms Tester	Rohde & Schwarz	CMW500	145919	05 May 2015	12
S021	Dual DC power supply	TTi	CPX200	061034	Calibrated before use	-
M1251	Multimeter	Fluke	175	89170179	19 May 2015	12

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Conducted Carrier Output Power	814 MHz to 824 MHz	95%	±1.13 dB
Occupied Bandwidth	814 MHz to 824 MHz	95%	±3.92 %
Radiated Emissions	30 MHz to 1 GHz	95%	±5.65 dB
Radiated Emissions	1 GHz to 9 GHz	95%	±2.94 dB
Frequency Stability	814 MHz to 824 MHz	95%	±23 Hz

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version
2.0	-	-	Update of sections 2.3 & 3.4
3.0	-	-	EUT Description update

--- END OF REPORT ---