



**KDB 865664 D01 SAR Measurement 100MHz to 6GHz
FCC 47 CFR part 2 (2.1093)**

SAR EVALUATION REPORT

For
Sony

FCC ID: PY7PM-0806

**Report Number UL-SAR-RP10295106JD06A V2.0
ISSUE DATE: 01 August 2014**

Prepared for
**SONY MOBILE COMMUNICATIONS INC.
NYA VATTENTORNET MOBILVÄGEN 10
LUND 22188
SWEDEN**

Prepared by
**UL VERIFICATION SERVICES LTD
PAVILION A, ASHWOOD PARK, ASHWOOD WAY
BASINGSTOKE, HAMPSHIRE, RG23 8BG, UK
TEL: +44 (0) 1256 312000
FAX: +44 (0) 1256 312001**





REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
--	11 July 2014	Initial Issue	--
1	01 Aug 2014	Made the following changes: 1. In Section 1, The EUT is a "GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac + NFC & ANT+ " 2. Description sentence removed in section 6.2	Naseer Mirza

TABLE OF CONTENTS

1. Attestation of Test Results.....	4
2. Test Specification, Methods and Procedures	5
3. Facilities and Accreditation.....	6
4. SAR Measurement System & Test Equipment.....	7
5. Measurement Uncertainty	8
6. Equipment Under Test (EUT)	9
7. RF Exposure Conditions (Test Configurations).....	23
8. System Check and Dielectric Parameters	42
9. Measurements, Examinations and Derived Results	43
Appendix 1. Test Equipment Used	78
Appendix 2. Measurement Methods	82
Appendix 3. SAR Distribution Scans	84
Appendix 4. Photographs.....	85
Appendix 5. Simulated Tissues	115
Appendix 6. System Check and Dielectric Parameters	116
Appendix 7. Measurement Uncertainty Table	123
Appendix 8. 3G Test set-up.....	131
Appendix 9. CAT24 Test set-up	138
Appendix 10: Antenna Schematics.....	145

1. Attestation of Test Results

Applicant Name:	Sony Mobile Communications Inc			
Application Purpose	☒ Original Grant			
DUT Description	The EUT is a GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac + NFC & ANT+			
Test Device is	An identical prototype			
Device category	Portable			
Exposure Category	General Population/Uncontrolled Exposure (1g SAR limit: 1.6 W/kg)			
Date Tested	09 June 2014 to 17 June 2014			
The highest reported SAR values	RF Exposure Conditions	Equipment Class		
		Licensed	DTS	UNII
	Head	0.550 W/kg	0.743 W/kg	0.798 W/kg
	Body-worn Accessory	1.250 W/kg	0.080 W/kg	0.385 W/kg
	Wireless Router (Hotspot)	1.437 W/kg	0.080 W/kg	0.385 W/kg
	Simultaneous Transmission	1.457 W/kg	1.457 W/kg	1.455 W/kg
Applicable Standards	FCC 47 CFR part 2 (2.1093) KDB publication IEEE Std 1528-2013			
Test Results	Pass			
UL Verification Services Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties are in accordance with the above standard and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample(s), under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by UKAS. This report is written to support regulatory compliance of the applicable standards stated above.				
Approved & Released By:		Prepared By:		
				
Naseer Mirza Project Lead UL Verification Services Ltd.		Sandhya Menon Laboratory Engineer UL Verification Services Ltd.		

2. Test Specification, Methods and Procedures

2.1. Test Specification

Reference:	KDB 865664 D01 SAR Measurement 100 Mhz to 6 GHz v01r03
Title:	SAR Measurement Requirements for 100 MHz to 6 GHz
Purpose of Test:	Field probes, tissue dielectric properties, SAR scans, measurement accuracy and variability of the measured results are discussed. The field probe and SAR scan requirements are derived from criteria considered in draft standard IEEE P1528-2011.
The Equipment Under Test complied with the Specific Absorption Rate for general population/uncontrolled exposure limit of 1.6 W/kg as specified in FCC 47 CFR part 2 (2.1093) and ANSI C95.1-1992 and has been tested in accordance with the reference documents in section 2.2 of this report.	

2.2. Methods and Procedures Reference Documentation

The methods and procedures used were as detailed in:

IEEE 1528: 2013

IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques

Thomas Schmid, Oliver Egger and Neils Kuster, "Automated E-field scanning system for dosimetric assessments", IEEE Transaction on microwave theory and techniques, Vol. 44, pp. 105-113, January 1996.

Neils Kuster, Ralph Kastle and Thomas Schmid, "Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions of communications, Vol. E80-B, No.5, pp. 645-652, May 1997.

FCC KDB Publication:

KDB 248227 D01 SAR measurements for 802.11a/b/g v01r02

KDB 447498 D01 General RF Exposure Guidance v05r02

KDB 648474 D04 SAR Handsets SAR v01r02

KDB 941225 D01 SAR test for 3G devices v02

KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE v01

KDB 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01

KDB 941225 D05 SAR for LTE Devices v02r03

KDB 941225 D06 Hotspot Mode SAR v01r01

KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03

KDB 865664 D02 SAR Reporting v01r01

2.3. Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Appendix 1 contains a list of the test equipment used.

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG UK	Facility Type
SAR Lab 56	Controlled Environment Chamber
SAR Lab 57	Controlled Environment Chamber
SAR Lab 58	Controlled Environment Chamber
SAR Lab 59	Controlled Environment Chamber
SAR Lab 60	Controlled Environment Chamber
SAR Lab 61	Controlled Environment Chamber

UL Verification Services Ltd, is accredited by UKAS (United Kingdom Accreditation Service), Laboratory UKAS Code 0644.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

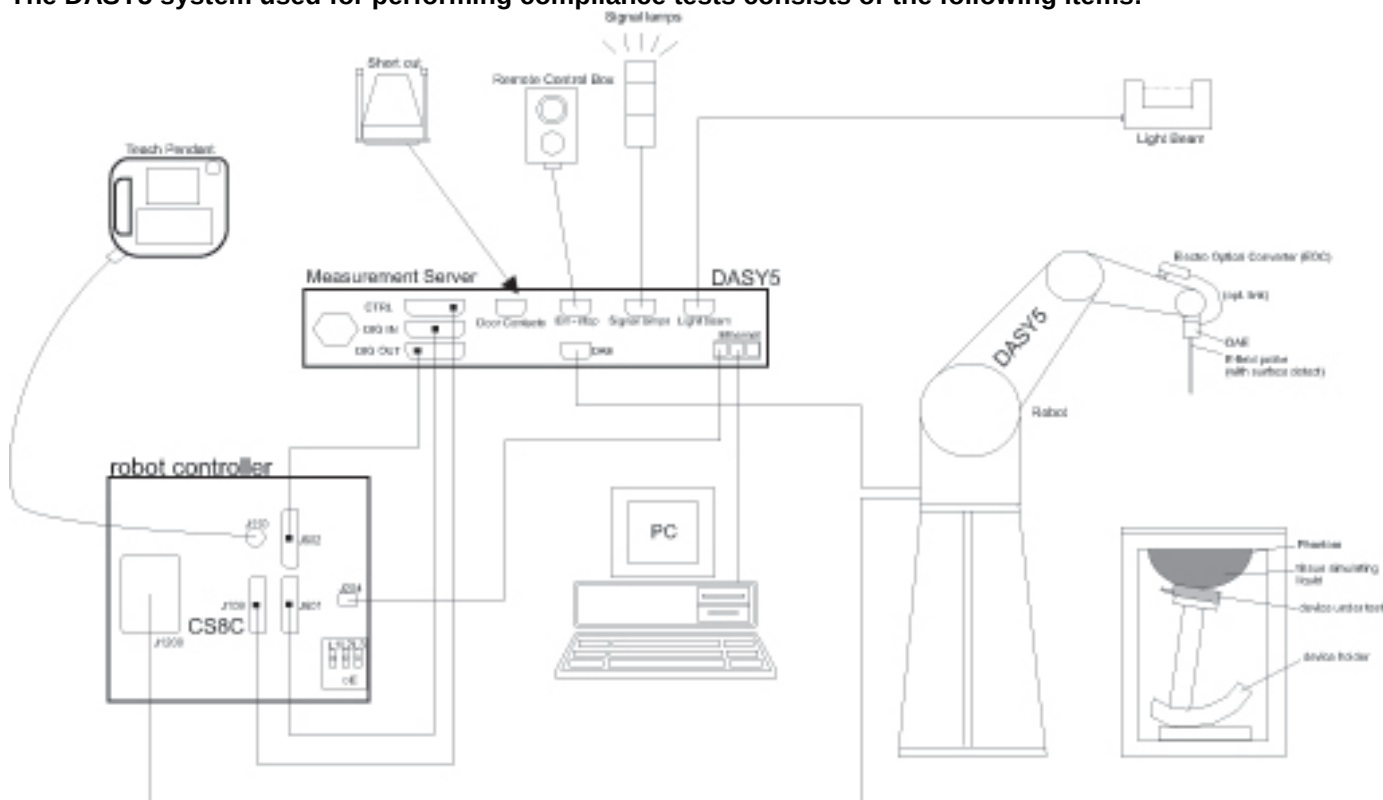

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards. [Appendix 1](#) of the report details the equipment used.

5. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Test Name	Confidence Level	Calculated Uncertainty
Specific Absorption Rate-GSM 850 / UMTS FDD 5 / LTE Band 5 Head Configuration 1g	95%	±18.77%
Specific Absorption Rate-GSM / GPRS / EDGE 850 / UMTS FDD 5 / LTE Band 5 Body Configurations 1g	95%	±18.36%
Specific Absorption Rate-PCS 1900 / UMTS FDD 2 Head Configuration 1g	95%	±18.88%
Specific Absorption Rate-GSM / GPRS / EDGE 1900 / UMTS FDD 2 Body Configuration 1g	95%	±18.26%
Specific Absorption Rate- LTE Band 7 / Wi-Fi 2450 MHz Head Configuration 1g	95%	±18.13%
Specific Absorption Rate-LTE Band 7 / Wi-Fi 2450 MHz Body Configuration 1g	95%	±18.35%
Specific Absorption Rate-Wi-Fi 5GHz Head Configuration 1g	95%	±21.25%
Specific Absorption Rate-Wi-Fi 5GHz Body Configuration 1g	95%	±19.90%

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

See [Appendix 7](#) for all uncertainty tables.

6. Equipment Under Test (EUT)

6.1. Identification of Equipment Under Test (EUT)

Serial Number/ IMEI Number:	Cellular Radiated Samples: CB5A1Z2HAE; 004402452728177 - used to perform GSM 850 Head SAR measurements only. CB5A1Z2HF3; 004402452728631 - used to perform GSM 850 Body SAR measurements only. CB5A1Z2H3D; 004402452728169 - used to perform UMTS FDD 2 Head and UMTS FDD 5 SAR measurements only. CB5A1Z2H78; 004402452727690 - used to perform UMTS FDD 2 Body SAR measurements only. CB5A1Z2HD2; 004402452728193-used to perform LTE Band 5 and LTE Band 7 Body SAR measurements only. CB5A1Z2H4K; 004402452728250 - used to perform LTE Band 7 Head SAR measurements only. Cellular Conducted Samples: CB5A1Z2HD6; 004402452727906 - used to perform Cellular Conducted power measurements for UMTS bands. CB5A1Z2H1N; 004402452727922 - used to perform Cellular Conducted power measurements for LTE Bands. CB5A1Z2H5E ; 004402452727740- used to perform Cellular Conducted power measurements for GSM Bands. WLAN Radiated Samples: CB5A1Z2HCG; 004402452728144 - used to perform WLAN 2.4GHz SAR measurements only. CB5A1Z2H9K; 004402452728367- used to perform WLAN 5.0GHz Head SAR measurements only. CB5A1Z2H1H; 004402452727666 - used to perform WLAN 5.0GHz Body SAR measurements only. WLAN Conducted Sample: CB5A1Z2HAR; 004402452727930- used to perform WLAN Conducted power measurements.
Hardware Version Number:	Cellular Sample: A; WLAN Sample: A
Software Version Number:	Cellular Sample: ATPV:1283-9868 ; WLAN Sample: 0_25_3_16_A
Country of Manufacture:	China
Date of Receipt:	09 June 2014

6.2. Further Description of EUT

The EUT supports GSM 850/1900MHz bands, UMTS FDD bands 2/5, LTE FDD bands 5/7 bands. It also supports Dual Transfer Mode Class 11 (DTM ~Voice +Data), GPRS service with multi-slots class 33, EGPRS service with multi-slots class 33, HSPA with HSDPA (Category 24) and HSUPA (Category 6) features are also supported. It has MP3, camera, FM radio, USB memory, GPS receiver, NFC, ANT+, Mobile High-Definition Link (MHL 3.0), Bluetooth (EDR and Bluetooth 4.0), WLAN (802.11 a/b/g/n/ac), Antenna Tuner and Wi-Fi hotspot functions with 'Auto RF Power Back-Off' (PCS1900, UMTS FDD 2) mode capabilities.

6.3. Modifications Incorporated in the EUT

There were no modification during the course of testing the device

6.4. Accessories

The following accessories were supplied with the EUT during testing:

Description:	Memory Card	Personal Hands-Free Kit (PHF)	Dummy Battery
Brand Name:	None Stated (Generic)	Sony	None Stated
Model Name or Number:	None Stated	MH410c	None Stated
Serial Number:	None Stated	None Stated	None Stated
Cable Length and Type:	Not Applicable	~1.2 m	~0.5m
Country of Manufacture:	China	None Stated	None Stated
Connected to Port	Micro SD Slot	3.5mm Audio jack and custom type	Unique to Manufacturer

Note(s):

1. This Dummy Battery was only used to perform conducted power measurements.

6.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Brand Name:	Model Name or Number:	Serial Number:	Cable Length and Type:	Connected to Port
Communication Test Set	Agilent	8960 Series 10 (E5515C)	GB46311280	~4.0m Utiflex Cable	RF (Input / Output) Air Link
Communication Test Set	Agilent	8960 Series 10 (E5515E)	GB46200666	~4.0m Utiflex Cable	RF (Input / Output) Air Link
Communication Test Set	Anritsu	MT8820C	6200938937	~4.0m Utiflex Cable	RF (Input / Output) Air Link
Communication Test Set	CMU200	1100.0008K02	119317	~4.0m Utiflex Cable	RF (Input / Output) Air Link
Communication Test Set	CMW500	1201.0002K50	145922	~4.0m Utiflex Cable	RF (Input / Output) Air Link
Communication Test Set	CMW500	1201.0002K50	146526	~4.0m Utiflex Cable	RF (Input / Output) Air Link
Communication Test Set	CMW500	1201.0002K50	145921	~4.0m Utiflex Cable	RF (Input / Output) Air Link

6.6.Additional Information Related to Testing

Equipment Category	2G GSM PCS	TDMA 850/ 1900	Voice DTM (Voice + Data) GPRS (Data) EDGE (Data)
	3G UMTS Band	FDD 2 / 5	RMC12.2 HSDPA Cat 24 HSPA Data Cat 6
	4G LTE Band	FDD 5 / 7	Data
	Wi-Fi Band	(2.4 / 5.0) GHz	Data 802.11a/b/g/n/ac
Type of Unit	Portable Transceiver		
Intended Operating Environment:	Within GSM, UMTS, LTE , Wi-Fi and <i>Bluetooth</i> Coverage		
Transmitter Maximum Output Power Characteristics:	GSM850	Communication Test Set was configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 5.	
	PCS1900	Communication Test Set was configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 0.	
	UMTS FDD 2	Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01.	
	UMTS FDD 5	Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01.	
	LTE Band 5	Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D05.	
	LTE Band 7	Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D05.	
	2.4 GHz Wi-Fi 802.11b/g/n	Test Software was used to configure the EUT to transmit at a maximum measured power of up to 12.5 dBm.	
	5.0 GHz Wi-Fi 802.11a	Test Software was used to configure the EUT to transmit at a maximum measured power of up to 16.2 dBm.	
	5.0 GHz Wi-Fi 802.11n (HT20 / HT40)	Test Software was used to configure the EUT to transmit at a maximum measured power of up to 16.1 dBm for HT20 and 14.5 dBm for HT40.	
	5.0 GHz Wi-Fi 802.11ac (VHT20 / VHT40 / VHT80)	Test Software was used to configure the EUT to transmit at a maximum measured power of up to 16.2 dBm for VHT20, 14.3 dBm for VHT40 and 14.6 dBm for VHT80.	
Transmitter Frequency Range:	GSM850	(824 to 849) MHz	
	PCS1900	(1850 to 1910) MHz	
	UMTS FDD 2	(1852 to 1908) MHz	
	UMTS FDD 5	(826 to 847) MHz	
	LTE Band 5	(820 to 850) MHz	
	LTE Band 7	(2505 to 2570) MHz	
	2.4 GHz Wi-Fi 802.11b/g/n	(2412 to 2462) MHz	
	5.0 GHz Sub band 1 Wi-Fi 802.11a/n/ac	(5180 to 5240) MHz	
	5.0 GHz Sub band 2 Wi-Fi 802.11a/n/ac	(5260 to 5320) MHz	
	5.0 GHz Sub band 3 Wi-Fi 802.11a/n/ac	(5500 to 5700) MHz	
	5.0 GHz Sub band 4 Wi-Fi 802.11a/n/ac	(5745 to 5825) MHz	


Additional Information Related to Testing (Continued)

Transmitter Frequency Allocation of EUT When Under Test:	Bands	Channel Number	Channel Description	Frequency (MHz)
	GSM850	128	Low	824.2
		190	Middle	836.6
		251	High	848.8
	PCS1900	512	Low	1850.2
		661	Middle	1880.0
		810	High	1909.8
	UMTS FDD 2	9262	Low	1852.4
		9400	Middle	1880.0
		9538	High	1907.6
	UMTS FDD 5	4132	Low	826.4
		4183	Middle	836.6
		4233	High	846.6
	LTE Band 5	20450	Low	829.0
		20525	Middle	836.5
		20625	High	844.0
	LTE Band 7	20850	Low	2510.0
		21100	Middle	2535.0
		21350	High	2560.0

Additional Information Related to Testing (Continued)

Transmitter Frequency Allocation of EUT When Under Test:	Band: 2.4 / 5.0 GHz Wi-Fi 802.11a/n/AC (HT20 / HT40/HT80)								
	Rule	20 MHz BW Ch.#	Frq. (MHz)	40 MHz BW Ch.#	Frq. (MHz)	80 MHz BW Ch.#	Frq. (MHz)		
	15.247	1	2412.0						
		6	2436.0						
		11	2462.0						
	5.2 U-NII-1	36	5180.0	38	5190.0				
		40	5200.0	42				5210.0	
		44	5220.0						46
		48	5240.0						
	5.3 U-NII-2A	52	5260.0	54	5270.0				
		56	5280.0	58				5290.0	
		60	5300.0						62
		64	5320.0						
	5.6 U-NII-2C	100	5500.0	102	5510.0				
		104	5520.0	106				5530.0	
		108	5540.0						110
		112	5560.0						
		116	5580.0	118	5590.0				
		120	5600.0	122				5610.0	
		124	5620.0						126
		128	5640.0						
		132	5660.0	134	5670.0				
		136	5680.0						
		140	5700.0						
	5.8 UNII-3	149	5745.0	151	5755.0				
		153	5765.0	155				5775.0	
		157	5785.0						159
		161	5805.0						
		165	5825.0						
Modulation(s):	GMSK (DTM / GSM / GPRS):					217 Hz			
	QPSK(UMTS / HSDPA/HSPA):					0Hz			
	DBPSK, BPSK, CCK (Wi-Fi):					0 Hz			
	QPSK, 16QAM (LTE):					0 Hz			
Modulation Scheme (Crest Factor):	GMSK (DTM Class 9 2-Uplink):					4			
	GMSK (GPRS1900 4- Uplink):					2			
	DBPSK, BPSK, CCK (Wi-Fi802.11a/b/g/n/ac):					1			
	QPSK(UMTS/ FDD / HSDPA):					1			
	QPSK, 16QAM (LTE):					1			
Antenna Type:	Internal integral								
Antenna Length:	As specified in Appendix 10								
Number of Antenna Positions:	WWAN ~ LTE / UMTS / GSM					1 fixed			
	WLAN/ BT					1 fixed			
	Felica/NFC					1 fixed			
	Sub/GPS					1 fixed			
Power Supply Requirement:	4.2 V								
Battery Type(s):	Embedded Li-ion								

Additional Information Related to LTE Test parameter
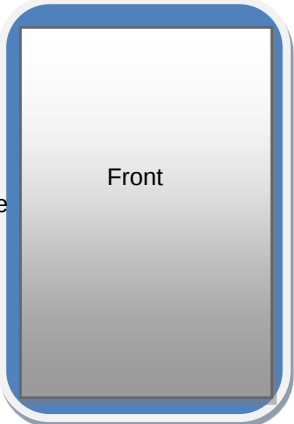
#	Description	Parameter
1	Identify the operating frequency range of each LTE transmission FCC band used by the device	Band 5: frequency range-820 MHz-850 MHz Band 7: frequency range-2505 MHz-2570 MHz
2	Identify the channel bandwidths used in each frequency band; e.g.: 1.4, 3, 5, 10, 15, 20 MHz etc.	Channel Bandwidths used are: B5 (1.4, 3, 5, 10) MHz B7 (5, 10, 15, 20) MHz
3	Identify the high, middle and low (L, M, H) channel numbers and frequencies tested in each LTE frequency band	B5 -10 MHz (H,M,L)= CH (20625, 20525, 20450); Freq (844, 836.5, 829) MHz B7 -20 MHz (H,M,L)= CH (21350, 21100, 20850); Freq (2560, 2535, 2510) MHz
4	Specify the UE category and uplink modulations used	The UE Category is 4 and the Uplink modulations used are QPSK, 16QAM.
5	Descriptions of the LTE transmitter and antenna implementation & identify whether it is a standalone transmitter operating independently of other wireless transmitters in the device or sharing hardware components and/or antenna(s) with other transmitters etc.	This model has only one main antenna for LTE/UMTS/GSM bands (as pictured in Appendix 10).
6	Identify the LTE Band Voice/data requirements in each operating mode and exposure condition with respect to head and body test configurations, antenna locations, handset flip-cover or slide positions, antenna diversity conditions, etc.	The following exposure condition with respect to head and body test are required for both voice and data modes due to EUT functionality and antenna locations. 1) Body-worn SAR is required at 15 mm separation distance 2) Mobile Hot Spot Mode will be tested by positioning the smart phone with 10 mm separation distance. - Wireless Personal Hotspot mode with consideration for the Front Display of EUT, Back of EUT, Left Hand side of EUT, Right Hand side of EUT, Top Edge of EUT and Bottom Edge of EUT with respect to the antenna location. The test separation distance between the EUT edge and phantom flat surface for this mode will be 10mm as the dimensions of the device is > 9cm x 5cm. 3) Head SAR is required in LTE Data Mode (QPSK) as this model does not supports SVLTE operation. Top  Left hand side Front Right hand side Bottom

Additional Information Related to LTE Test parameter (Continued):

#	Description	Parameter
7	Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design: a) only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards b) A-MPR (additional MPR) must be disabled.	The EUT incorporates MPR as per 36.101 as shown in the section 8. MPR cannot be disabled after the phone is manufactured, MPR is mandatory. * Target MPR
8	Include the maximum average conducted output power measured on the required test channels for each channel bandwidth and UL modulation used in each frequency band: a) using 1 RB allocated at the low edge, centered and high edge of a channel b) using 50% RB allocated at the low edge, centered and high edge of a channel c) using 100% RB allocation	This is included in the section 8.3 of this report.
9	Identify all other U.S. wireless operating modes (3G, Wi-Fi, WiMax, Bluetooth etc), device/exposure configurations (head and body, antenna and handset flip-cover or slide positions, antenna diversity conditions etc.) and frequency bands used for these modes	The following bands are supported for the exposure conditions 1) GSM (850/1900) and UMTS FDD (850, 1900) - Exposure conditions: Head/Body worn SAR required for GSM / UMTS FDD and wireless personal hotspot. DTM is supported on GSM bands. 2) Bluetooth 2.4GHz (Basic Rate & EDR) - Exposure conditions: BT SAR is not required as per 10.3.1 3) Wi-Fi 2.4GHz - Exposure conditions: Head/Body SAR required for wireless personal hotspot. No Power reduction is supported. 4) Wi-Fi 5 GHz - Exposure conditions: Head/Body SAR required for wireless personal hotspot. No power reduction is supported,

Additional Information Related to LTE Test parameter (Continued):

#	Description	Parameter
10	Include the maximum average conducted output power measured for the other wireless mode and frequency bands	This is included in the section 8 of this report.
11	Identify the simultaneous transmission conditions for the voice and data configurations supported by all wireless modes, device configurations and frequency bands, for the head and body exposure conditions and device operating configurations (handset flip or cover positions, antenna diversity conditions etc.)	Bluetooth average power measurement is below the rated threshold therefore Individual SAR will not be tested. Sim_Tx consideration will be based on the estimated SAR level. All simultaneous transmission combinations are identified and summarised in Section 10.5 of the report.
12	When power reduction is applied to certain wireless modes to satisfy SAR compliance for simultaneous transmission conditions, other equipment certification or operating requirements, include the maximum average conducted output power measured in each power reduction mode applicable to the simultaneous voice/data transmission configurations for such wireless configurations and frequency bands; and also include details of the power reduction implementation and measurement setup	Not applicable.
13	Include descriptions of the test equipment, test software, built-in test firmware etc. required to support testing the device when power reduction is applied to one or more transmitters/antennas for simultaneous voice/data transmission	Anritsu MT8820C and R&S CMW500 communication simulator Communication tester which support LTE modes (Data) were used for testing.
14	When appropriate, include a SAR test plan proposal with respect to the above.	Not Applicable
15	If applicable, include preliminary SAR test data and/or supporting information in laboratory testing inquiries to address specific issues and concerns or for requesting further test reduction considerations appropriate for the device; for example simultaneous transmission configurations.	Not Applicable

6.6.1. Operating Modes

The EUT was tested in the following operating mode(s) unless otherwise stated:

- GSM850 Head and Body-Worn – DTM Class 9 – DTM (Voice + Data) allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 5. Tested using 2 Uplink time slots with DTM multi class 9 (1 uplink for voice + 1 uplink for GPRS with CS1).
- GSM850 Hotspot Mode – DTM (Voice + Data) allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 5. Tested using 2 Uplink time slots with DTM multi class 9 (1 uplink for voice + 1 uplink for GPRS with CS1).
- PCS1900 Head and Body-Worn – DTM (Voice + Data) allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 0. Tested using 3 Uplink time slots with DTM multi class 11 (1 uplink for voice + 2 uplink for GPRS with CS1).
- PCS1900 Hotspot Mode – Data allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 0. Tested using 4 Uplink time slots with CS1 for GPRS.

GSM850: Power Table Settings used for Test Set		PCS1900: Power Table Settings used for Test Set	
Power Control Level PCL	Nominal Power (dBm)	Power Control Level PCL	Nominal Power (dBm)
0 ... 2	39	22 ... 29	Reserved
3	37	30	33
4	35	31	32
5	33	0	30
6	31	1	28
7	29	2	26
8	27	3	24
9	25	4	22
10	23	5	20
11	21	6	18
12	19	7	16
13	17	8	14
14	15	9	12
15	13	10	10
16	11	11	8
17	9	12	6
18	7	13	4
19 ... 31	5	14	2
		15	0
		16 ... 21	Reserved

- UMTS FDD 2, 5 - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to all "1's", to transmit at a maximum as per KDB 941225 D01.
- UMTS FDD 2, 5 - RMC 12.2kbps + HSUPA with Test loop mode 1 and TPC bits configured to all "1's", Sub-test 5, AG Index set to 21 and E-TFCI set to 81 with Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01.
- UMTS FDD 2, 5 - RMC 12.2kbps + HSDPA with Test loop mode 1 and TPC bits configured to all "1's", Sub-test 1 with Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01.
- UMTS FDD 2, 5 - DC HSDPA (Cat 24) with Test loop mode 1 and TPC bits configured to all "1's", Sub-test 1 with Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D01. (See Appendix 9 for detailed description)

Operating Modes (Continued)

- LTE Band 5 data allocated mode at QPSK on 10MHz BW channels, using a Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D05.
- LTE Band 7 data allocated mode at QPSK on 20MHz BW channels, using a Communication Test Set configured to allow to EUT to transmit at a maximum power as per KDB 941225 D05.
- 2.4 GHz Wi-Fi802.11b/g/n Data allocated mode using 'HyperTerminal' software to excise mode 'b', 'g' and 'n', with maximum power of up to 12.5 dBm for 'b' mode and 12.4 dBm for 'g' and 12.4 dBm for 'n' modes.
- 5.0 GHz Wi-Fi802.11a/n/ac Sub band 1 - Data allocated mode using 'HyperTerminal' software to excise mode 'a' 'n' and 'ac', with maximum power of up to 15.4 dBm for 'a' mode, 15.7 dBm for 'n' mode and 15.7 dBm for 'ac' modes.
- 5.0 GHz Wi-Fi802.11a/n/ac Sub band 2 - Data allocated mode using 'HyperTerminal' software to excise mode 'a' 'n' and 'ac', with maximum power of up to 15.6 dBm for 'a' mode, 15.6 dBm for 'n' mode and 15.8 dBm for 'ac' modes.
- 5.0 GHz Wi-Fi802.11a/n/ac Sub band 3 - Data allocated mode using 'HyperTerminal' software to excise mode 'a' 'n' and 'ac', with maximum power of up to 16.2 dBm for 'a' mode, 16.2 dBm for 'n' mode and 16.2 dBm for 'ac' modes.
- 5.0 GHz Wi-Fi802.11a/n/ac Sub band 4 - Data allocated mode using 'HyperTerminal' software to excise mode 'a' 'n' and 'ac', with maximum power of up to 15.9 dBm for 'a' mode, 15.8 dBm for 'n' mode and 15.7 dBm for 'ac' modes.

6.7.Nominal and Maximum Output power:**Power Back-Off Not Supported**

Bands	Speech (Voice Mode)	
	Target (dBm)	Tolerance $\pm$ (dB)
GSM850	32.5	-0.9~+0.6

Power Back-Off Supported & Disabled

Bands	Speech (Voice Mode)	
	Target (dBm)	Tolerance $\pm$ (dB)
PCS1900	30.0	-0.7~+0.7

Power Back-Off Supported & Enabled

Bands	Speech (Voice Mode)	
	Target (dBm)	Tolerance $\pm$ (dB)
PCS1900	25.0	-0.7~+0.7

Power Back-Off Not Supported

Bands	GPRS							
	Tx Slot 1		Tx Slot 2		Tx Slot 3		Tx Slot 4	
	Target (dBm)	Tolerance $\pm$ (dB)	Target (dBm)	Tolerance $\pm$ (dB)	Target (dBm)	Tolerance $\pm$ (dB)	Target (dBm)	Tolerance $\pm$ (dB)
GSM850	32.5	-0.9~+0.6	31.0	-1.5~+0.6	29.0	-1.5~+0.6	28.0	-1.5~+0.6
Bands	EDGE GMSK (MCS1-4)							
GSM850	32.5	-0.9~+0.6	31.0	-1.5~+0.6	29.0	-1.5~+0.6	28.0	-1.5~+0.6
Bands	EDGE 8PSK (MCS5-9)							
GSM850	27.0	-1.5~+1.0	25.0	-1.5~+1.0	24.0	-1.5~+1.0	22.0	-1.5~+1.0

Power Back-Off Supported & Disabled

Bands	GPRS							
	Tx Slot 1		Tx Slot 2		Tx Slot 3		Tx Slot 4	
	Target (dBm)	Tolerance $\pm$ (dB)	Target (dBm)	Tolerance $\pm$ (dB)	Target (dBm)	Tolerance $\pm$ (dB)	Target (dBm)	Tolerance $\pm$ (dB)
PCS1900	30.0	-0.7~+0.7	28.0	-1.5~+0.6	27.0	-1.5~+0.6	26.0	-1.5~+0.6
Bands	EDGE GMSK (MCS1-4)							
PCS1900	30.0	-0.7~+0.7	28.0	-1.5~+0.6	27.0	-1.5~+0.6	26.0	-1.5~+0.6
Bands	EDGE 8PSK (MCS5-9)							
PCS1900	26.0	-1.5~+1.0	24.0	-1.5~+1.0	23.0	-1.5~+1.0	22.2	-1.5~+1.0

Power Back-Off Supported & Enabled

Bands	GPRS							
	Tx Slot 1		Tx Slot 2		Tx Slot 3		Tx Slot 4	
	Target (dBm)	Tolerance $\pm$ (dB)	Target (dBm)	Tolerance $\pm$ (dB)	Target (dBm)	Tolerance $\pm$ (dB)	Target (dBm)	Tolerance $\pm$ (dB)
PCS1900	25.0	-1.5~+1.0	23.0	-1.5~+1.0	22.0	-1.5~+1.0	21.0	-1.5~+1.0
Bands	EDGE GMSK (MCS1-4)							
PCS1900	25.0	-1.5~+1.0	23.0	-1.5~+1.0	22.0	-1.5~+1.0	21.0	-1.5~+1.0
Bands	EDGE 8PSK (MCS5-9)							
PCS1900	24.5	-1.5~+1.5	22.5	-1.5~+1.5	21.5	-1.5~+1.5	20.5	-1.5~+1.5

Nominal and Maximum Output power:**Power Back-Off Not Supported**

Band	CS		HS	
	Target (dBm)	Tolerance $\pm$ (dB)	Target (dBm)	Tolerance $\pm$ (dB)
UMTS FDD 5	24.0	-0.7~+0.5	24.0	-0.7~+0.5
Power Back-Off Supported & Disabled				
UMTS FDD 2	23.5	-0.7~+0.5	23.5	-0.7~+0.5
Power Back-Off Supported & Enabled				
UMTS FDD 2	17.5	-0.7~+0.5	17.5	-0.7~+0.5

Band	Target (dBm)						Tolerance ± (dB)
	QPSK			16QAM			
	1RB	50% RB	100% RB	1RB	50% RB	100% RB	
Power Back-Off Not Supported							
LTE Band 5	23.0	22.0	22.0	22.0	21.0	21.0	-1.0 ~ +1.0
LTE Band 7	23.0	22.0	22.0	22.0	21.0	21.0	-1.0 ~ +1.0

Power Back-Off Not Supported

	WLAN Modes					
	2.4 GHz 802.11b		2.4 GHz 802.11g		2.4 GHz 802.11n	
	1 Mbps	11 Mbps	6 Mbps	54 Mbps	6.5 Mbps	65 Mbps
Max Power {Target + Upper Tolerance} (dBm)	13.5	13.5	13.4	13.4	13.4	13.4

Power Back-Off Not Supported

5.0 GHz 802.11a	5.2 GHz 802.11a		5.3 GHz 802.11a		5.6 GHz 802.11a		5.8 GHz 802.11a	
	6 Mbps	54 Mbps	6 Mbps	54 Mbps	6 Mbps	54 Mbps	6 Mbps	54 Mbps
Max Power {Target + Upper Tolerance} (dBm)	16.3	16.3	16.3	16.3	16.5	16.5	16.5	16.5
5.0 GHz 802.11n HT-20 / 11ac VHT-20	5.2 GHz 802.11n		5.3 GHz 802.11n		5.6 GHz 802.11n		5.8 GHz 802.11n	
	6.5 Mbps	65 Mbps	6.5 Mbps	65 Mbps	6.5 Mbps	65 Mbps	6.5 Mbps	65 Mbps
Max Power {Target + Upper Tolerance} (dBm)	16.3	13.3	16.3	13.3	16.6	13.7	16.6	13.7
5.0 GHz 802.11n HT-40 / 11ac VHT-40	5.2 GHz 802.11n		5.3 GHz 802.11n		5.6 GHz 802.11n		5.8 GHz 802.11n	
	13.5 Mbps	135 Mbps	13.5 Mbps	135 Mbps	13.5 Mbps	135 Mbps	13.5 Mbps	135 Mbps
Max Power {Target + Upper Tolerance} (dBm)	14.3	12.3	14.3	12.3	14.7	12.7	14.7	12.7
5.0 GHz 802.11ac VHT-80	5.2 GHz 802.11ac		5.3 GHz 802.11ac		5.6 GHz 802.11ac		5.8 GHz 802.11ac	
	13.5 Mbps	135 Mbps	13.5 Mbps	135 Mbps	13.5 Mbps	135 Mbps	13.5 Mbps	135 Mbps
Max Power {Target + Upper Tolerance} (dBm)	14.2	12.2	14.2	12.2	14.5	12.6	14.5	12.6

Band		Max Power {Target (dBm) + Upper Tolerance (dBm)}		
Bluetooth	Channel	BR	EDR	BLE
	Low	10.0	7.9	2.4
	Mid	10.0	7.9	2.4
	High	10.0	7.9	2.4

Note:

1. As per KDB865664 D02 SAR Reporting v01, 2.1.4(a), the nominal and maximum average source based rated power, declared by manufacturer are shown in the above tables.
2. These are specified maximum allowed average power for all the wireless modes and frequencies bands supported.

6.8. Simultaneous Transmission Conditions

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

#	Simultaneous transmission conditions					
	WWAN			WLAN		WPAN
	LTE BAND Data	GSM Voice / Data / DTM	UMTS Voice / Data	Wi-Fi 802.11b/g/n	Wi-Fi 802.11a/n/ac	Bluetooth
1	X			X		
2		X		X		
3			X	X		
4	X				X	
5		X			X	
6			X		X	
7	X					X
8		X				X
9			X			X
10					X	X
11	X				X	X
12		X			X	X
13			X		X	X

Note:

Based on the customer declaration, the following are the possible combination of the Simultaneous Transmission possibilities in the EUT:

1. WWAN + WLAN 2.4 GHz
2. WWAN + WLAN 5.0 GHz
3. WWAN + WPAN
4. WPAN + WLAN 5.0 GHz
5. WWAN + WLAN 5.0 GHz + WPAN

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix "Antenna Locations and Separation Distances" for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

7.1. Configuration and Peripherals

The EUT was tested in the following configuration(s) unless otherwise stated:

- Standalone fully charged battery powered.
- Head, Hotspot Mode and Body-worn configurations were evaluated.
- The applied FCC body-worn Personal Hotspot orientations where the corresponding edge(s) closest to the user with the most conservative exposure condition were all evaluated at 10 mm from the body. For configuration that did not overlap with Personal hotspot, SAR evaluation was performed at 15mm separation.
- GSM, DTM, GPRS and EDGE power measurement were all measured as per FCC pubs. 941225 D03. Although power reduction was allowed SAR test was performed on GPRS using GMSK. Test reduction was applied to EDGE using GMSK and 8PSK modulation scheme.

Head Configuration

- a) The EUT was placed in a normal operating position with the centre of the ear-piece aligned with the ear canal on the phantom.
- b) With the ear-piece touching the phantom the centre line of the EUT was aligned with an imaginary plane (X and Y axis) consisting of three lines connecting both ears and the mouth.
- c) For the cheek position the EUT was gradually moved towards the cheek until any point of the mouth-piece or keypad touched the cheek.
- d) For the tilted position the EUT was positioned as for the cheek position, and then the horizontal angle was increased by fifteen degrees (the phone keypad was moved away from the cheek by fifteen degrees).
- e) SAR measurements were evaluated at maximum power and the unit was operated for an appropriate period prior to the evaluation in order to minimise the drift.
- f) The device was keyed to operate continuously in the transmit mode for the duration of the test.
- g) The location of the maximum spatial SAR distribution (hot spot) was determined relative to the EUT and its antenna.
- h) The EUT was transmitting at full power throughout the duration of the test powered by a fully charged battery.

Body Configuration

- a) The EUT was placed in a normal operating position where the centre of EUT was aligned with the centre reference point on the flat section of the 'SAM' or 'Eli' phantom.
- b) With the EUT touching the phantom at an imaginary centre line. The EUT was aligned with a marked plane (X and Y axis) consisting of two lines.
- c) For the touch-safe position the EUT was gradually moved towards the flat section of the 'SAM' phantom until any point of the EUT touched the phantom.
- d) For position(s) greater than 0mm separation the EUT was positioned as per the touch-safe position, and then the vertical height was decreased/adjusted as required.
- e) SAR measurements were evaluated at maximum power and the unit was operated for an appropriate period prior to the evaluation in order to minimise the drift.
- f) The device was keyed to operate continuously in the transmit mode for the duration of the test.
- g) The location of the maximum spatial SAR distribution (hot spot) was determined relative to the EUT and its antenna.
- h) The EUT was transmitting at full power throughout the duration of the test powered by a fully charged battery.

7.2. Configuration Consideration

Technology Antenna	Configuration	Antenna-to-User Separation	Position	Antenna-to-Edge Separation	Evaluation Considered
WWAN	Head	0mm	Touch Left	<25mm	Yes
			Tilt Left	<25mm	Yes
			Touch Right	<25mm	Yes
			Tilt Right	<25mm	Yes
	Hotspot	10mm	Front	<25mm	Yes
			Back	<25mm	Yes
			Top Edge	>25mm	No
			Bottom Edge	<25mm	Yes
			Right Edge	<25mm	Yes
			Left Edge	<25mm	Yes
	Body	15mm	Front	<25mm	Yes
			Back	<25mm	Yes
WLAN	Head	0mm	Touch Left	<25mm	Yes
			Tilt Left	<25mm	Yes
			Touch Right	<25mm	Yes
			Tilt Right	<25mm	Yes
	Hotspot	10mm	Front	<25mm	Yes
			Back	<25mm	Yes
			Top Edge	<25mm	Yes
			Bottom Edge	>25mm	No
			Right Edge	>25mm	No
			Left Edge	<25mm	Yes
	Body	15mm	Front	<25mm	Yes
			Back	<25mm	Yes

Note:

1. Test distances are as per FCC KDB publication 447498 D01v05 for mobile handsets.
2. Bluetooth standalone SAR is excluded as the output power meets the exclusion threshold:

- 1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{\text{GHz}}}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR,}^{16} \text{ where}$$

- f_{GHz} is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation¹⁷
- The result is rounded to one decimal place for comparison

” Taken from FCC KDB publication 447498 D01v05r02

7.3. SAR Test Exclusion Consideration

Frequency Band	Configuration(s)		
	Head	Hotspot Mode	Body-worn
GSM850	No	No	No
PCS1900	No	No	No
UMTS FDD 2	No	No	No
UMTS FDD 5	No	No	No
LTE Band 5	No	No	No
LTE Band 7	No	No	No
WLAN 2.4 GHz	No	No	No
WLAN 5.0 GHz	No	No	No
Bluetooth	N/A	Yes	Yes

Note:

- As per KDB 447498 D01 General RF Exposure Guidance v05r02, The Frequency Bands with Rated Power including Upper tolerance, which qualify for **Standalone SAR Test Exclusion**, are as per the above table.

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] * [\sqrt{f_{(\text{GHz})}}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

$[\sqrt{f_{(\text{GHz})}}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest *mW* and *mm* before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Applying the above formula for *Bluetooth* Hotspot Mode we get:

$$\text{➤ For 2450MHz, } [(10)/10] * [\sqrt{2.45}] = 1.6 \leq 3.0$$

Applying the above formula for *Bluetooth* Body-worn we get:

$$\text{➤ For 2450MHz, } [(10)/15] * [\sqrt{2.45}] = 1.1 \leq 3.0$$

Hence, no SAR testing was performed on *Bluetooth*.

- The details for the **Maximum Rated Power** and tolerance(s) can be found in section 6.7.

7.4. RF Output Average Power Measurement: 2G**7.4.1. GSM850****Power Back-Off NOT Supported****Voice Mode GSM (GMSK)**

Channel Number	Frequency (MHZ)	Avg Burst Power (dBm)	Frame Power (dBm)
128	824.2	32.9	23.9
190	836.6	32.9	23.9
251	848.8	32.9	23.9

GPRS (GMSK) – Coding Scheme: CS1

Channel Number	Frequency (MHZ)	Avg Burst Power (dBm)				Frame Power (dBm)			
		1Uplink	2Uplink	3Uplink	4Uplink	1Uplink	2Uplink	3Uplink	4Uplink
128	824.2	32.9	31.0	28.9	27.6	23.9	25.0	24.6	24.6
190	836.6	32.9	31.0	28.9	27.6	23.9	25.0	24.6	24.6
251	848.8	32.9	31.1	28.9	27.7	23.9	25.1	24.6	24.7

EDGE (GMSK) – Coding Scheme: MCS4

128	824.2	32.7	30.7	28.6	27.7	23.7	24.7	24.3	24.7
190	836.6	32.7	30.8	28.6	27.6	23.7	24.8	24.3	24.6
251	848.8	32.7	30.8	28.3	27.6	23.7	24.8	24.0	24.6

EDGE (8PSK) – Coding Scheme: MCS9

128	824.2	27.4	25.2	24.3	22.2	18.4	19.2	20.0	19.2
190	836.6	27.4	25.2	24.3	22.2	18.4	19.2	20.0	19.2
251	848.8	27.4	25.2	24.3	22.3	18.4	19.2	20.0	19.3

DTM - Voice Mode GSM (GMSK) + GPRS (GMSK) – Coding Scheme: CS1

Channel Number	Frequency (MHZ)	Avg Burst Power (dBm)						Frame Power (dBm)					
		Class 5		Class 9		Class 11		Class 5		Class 9		Class 11	
		GSM 1 Uplink	GPRS 1 Uplink	GSM 1 Uplink	GPRS 1 Uplink	GSM 1 Uplink	GPRS 2 Uplink	GSM 1 Uplink	GPRS 1 Uplink	GSM 1 Uplink	GPRS 1 Uplink	GSM 1 Uplink	GPRS 2 Uplink
128	824.2	30.8	30.8	30.9	30.8	28.7	28.6	24.8	24.8	24.9	24.8	24.4	24.3
190	836.6	30.8	30.7	30.8	30.7	28.8	28.6	24.8	24.7	24.8	24.7	24.5	24.3
251	848.8	30.8	30.7	30.8	30.7	28.7	28.6	24.8	24.7	24.8	24.7	24.4	24.3

DTM - Voice Mode GSM (GMSK) + EDGE (GMSK) – Coding Scheme: MCS4

128	824.2	30.9	30.8	30.9	30.8	28.8	28.6	24.9	24.8	24.9	24.8	24.5	24.3
190	836.6	30.8	30.7	30.9	30.7	28.7	28.6	24.8	24.7	24.9	24.7	24.4	24.3
251	848.8	30.8	30.7	30.9	30.8	28.7	28.6	24.8	24.7	24.9	24.8	24.4	24.3

DTM - Voice Mode GSM (GMSK) + EDGE (8PSK) – Coding Scheme: MCS9

128	824.2	30.9	25.1	30.9	25.1	24.3	24.2	19.1	24.9	24.9	19.1	20.0	19.9
190	836.6	30.8	25.0	30.9	25.1	24.2	24.2	19.0	24.8	24.9	19.1	19.9	19.9
251	848.8	30.9	25.1	30.9	25.1	24.2	24.2	19.1	24.9	24.9	19.1	19.9	19.9

GSM850 (Continued)**Note:****Scale factor for uplink time slot:**

1. 1 Uplink: time slot ratio = 8:1 => $10 \cdot \log(8/1) = 9.03 \text{ dB}$
2. 2 Uplink: time slot ratio = 8:2 => $10 \cdot \log(8/2) = 6.02 \text{ dB}$
3. 3 Uplink: time slot ratio = 8:3 => $10 \cdot \log(8/3) = 4.26 \text{ dB}$
4. 4 Uplink: time slot ratio = 8:4 => $10 \cdot \log(8/4) = 3.01 \text{ dB}$

Conclusions:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- For Head SAR Testing, GSM and DTM should be evaluated; therefore the EUT was set in **DTM Multi-slot class 9** due its highest Frame Average Power (dBm)
- For Hotspot Mode SAR Testing, GPRS and DTM should be evaluated; therefore the EUT was set in **GPRS 2 Tx** due its highest Frame Average Power (dBm)
- For Body worn SAR Testing, GSM and DTM should be evaluated, therefore the EUT was set in **DTM Multi-slot class 9** due its highest Frame Average Power (dBm)

7.4.2.PCS1900**Power Back-Off Supported & Disabled****Voice Mode GSM (GMSK)**

Channel Number	Frequency (MHZ)	Avg Burst Power (dBm)	Frame Power (dBm)
512	1850.2	30.3	21.3
661	1880.0	30.4	21.4
810	1909.8	30.5	21.5

GPRS (GMSK) – Coding Scheme: CS1

Channel Number	Frequency (MHZ)	Avg Burst Power (dBm)				Frame Power (dBm)			
		1Uplink	2Uplink	3Uplink	4Uplink	1Uplink	2Uplink	3Uplink	4Uplink
512	1850.2	30.3	27.8	26.4	25.5	21.3	21.8	22.1	22.5
661	1880.0	30.5	27.7	26.5	25.6	21.5	21.7	22.2	22.6
810	1909.8	30.5	27.8	26.6	25.6	21.5	21.8	22.3	22.6

EDGE (GMSK) – Coding Scheme: MCS4

512	1850.2	30.4	27.8	26.5	25.5	21.4	21.8	22.2	22.5
661	1880.0	30.5	27.8	26.6	25.6	21.5	21.8	22.3	22.6
810	1909.8	30.5	27.9	26.6	25.6	21.5	21.9	22.3	22.6

EDGE (8PSK) – Coding Scheme: MCS9

512	1850.2	26.3	24.4	23.5	22.5	17.3	18.4	19.2	19.5
661	1880.0	26.4	24.5	23.6	22.5	17.4	18.5	19.3	19.5
810	1909.8	26.4	24.5	23.7	22.6	17.4	18.5	19.4	19.6

DTM - Voice Mode GSM (GMSK) + GPRS (GMSK) – Coding Scheme: CS1

Channel Number	Frequency (MHZ)	Avg Burst Power (dBm)						Frame Power (dBm)					
		Class 5		Class 9		Class 11		Class 5		Class 9		Class 11	
		GSM 1 Uplink	GPRS 1 Uplink	GSM 1 Uplink	GPRS 1 Uplink	GSM 1 Uplink	GPRS 2 Uplink	GSM 1 Uplink	GPRS 1 Uplink	GSM 1 Uplink	GPRS 1 Uplink	GSM 1 Uplink	GPRS 2 Uplink
512	1850.2	27.9	27.8	27.9	27.8	26.5	26.5	21.9	21.8	21.9	21.8	22.2	22.2
661	1880.0	27.9	27.8	27.9	27.8	26.6	26.5	21.9	21.8	21.9	21.8	22.3	22.2
810	1909.8	27.9	27.8	27.9	27.9	26.8	26.7	21.9	21.8	21.9	21.9	22.5	22.4

DTM - Voice Mode GSM (GMSK) + EDGE (GMSK) – Coding Scheme: MCS4

512	1850.2	27.8	27.8	27.8	27.8	26.5	26.5	21.8	21.8	21.8	21.8	22.2	22.2
661	1880.0	27.8	27.9	27.8	27.8	26.6	26.5	21.8	21.9	21.8	21.8	22.3	22.2
810	1909.8	27.9	27.8	27.9	27.8	26.7	26.6	21.9	21.8	21.9	21.8	22.4	22.3

DTM - Voice Mode GSM (GMSK) + EDGE (8PSK) – Coding Scheme: MCS9

512	1850.2	27.8	24.4	27.8	24.3	23.6	23.5	18.4	21.8	21.8	18.3	19.3	19.2
661	1880.0	27.8	24.4	27.8	24.3	23.6	23.6	18.4	21.8	21.8	18.3	19.3	19.3
810	1909.8	27.9	24.5	27.9	24.4	23.7	23.7	18.5	21.9	21.9	18.4	19.4	19.4

PCS1900**Power Back-Off Supported & Enabled****Voice Mode GSM (GMSK)**

Channel Number	Frequency (MHZ)	Avg Burst Power (dBm)	Frame Power (dBm)
512	1850.2	25.8	16.8
661	1880.0	25.7	16.7
810	1909.8	25.9	16.9

GPRS (GMSK) – Coding Scheme: CS1

Channel Number	Frequency (MHZ)	Avg Burst Power (dBm)				Frame Power (dBm)			
		1Uplink	2Uplink	3Uplink	4Uplink	1Uplink	2Uplink	3Uplink	4Uplink
512	1850.2	25.8	23.1	22.0	21.1	16.8	17.1	17.7	18.1
661	1880.0	25.8	23.2	22.1	21.1	16.8	17.2	17.8	18.1
810	1909.8	25.9	23.3	22.1	21.3	16.9	17.3	17.8	18.3

EDGE (GMSK) – Coding Scheme: MCS4

512	880.2	25.8	23.1	22.0	21.1	16.8	17.1	17.7	18.1
661	897.4	25.7	23.1	22.1	21.1	16.7	17.1	17.8	18.1
810	914.8	25.9	23.3	22.0	21.2	16.9	17.3	17.7	18.2

EDGE (8PSK) – Coding Scheme: MCS9

512	1850.2	25.0	22.8	21.2	20.2	16.0	16.8	16.9	17.2
661	1880.0	25.0	22.7	21.2	20.2	16.0	16.7	16.9	17.2
810	1909.8	25.1	22.8	21.3	20.2	16.1	16.8	17.0	17.2

DTM - Voice Mode GSM (GMSK) + GPRS (GMSK) – Coding Scheme: CS1

Channel Number	Frequency (MHZ)	Avg Burst Power (dBm)						Frame Power (dBm)					
		Class 5		Class 9		Class 11		Class 5		Class 9		Class 11	
		GSM 1 Uplink	GPRS 1 Uplink	GSM 1 Uplink	GPRS 1 Uplink	GSM 1 Uplink	GPRS 2 Uplink	GSM 1 Uplink	GPRS 1 Uplink	GSM 1 Uplink	GPRS 1 Uplink	GSM 1 Uplink	GPRS 2 Uplink
512	1850.2	23.1	23.1	23.1	23.1	22.0	21.9	17.1	17.1	17.1	17.1	17.7	17.6
661	1880.0	23.1	23.1	23.2	23.1	22.1	22.0	17.1	17.1	17.2	17.1	17.8	17.7
810	1909.8	23.3	23.3	23.3	23.3	22.1	22.0	17.3	17.3	17.3	17.3	17.8	17.7

DTM - Voice Mode GSM (GMSK) + EDGE (GMSK) – Coding Scheme: MCS4

512	1850.2	23.1	23.1	23.1	23.1	22.0	21.9	17.1	17.1	17.1	17.1	17.7	17.6
661	1880.0	23.1	23.1	23.2	23.1	22.0	22.0	17.1	17.1	17.2	17.1	17.7	17.7
810	1909.8	23.3	23.3	23.3	23.3	22.0	22.0	17.3	17.3	17.3	17.3	17.7	17.7

DTM - Voice Mode GSM (GMSK) + EDGE (8PSK) – Coding Scheme: MCS9

512	1850.2	23.2	22.6	23.1	22.4	21.1	21.1	17.2	16.6	17.1	16.4	16.8	16.8
661	1880.0	23.3	22.6	23.1	22.4	21.1	21.1	17.3	16.6	17.1	16.4	16.8	16.8
810	1909.8	23.4	22.7	23.3	22.4	21.2	21.2	17.4	16.7	17.3	16.4	16.9	16.9

PCS1900 (Continued):**Note:****Scale factor for uplink time slot:**

1. 1 Uplink: time slot ratio = 8:1 => $10 \cdot \log(8/1) = 9.03 \text{ dB}$
2. 2 Uplink: time slot ratio = 8:2 => $10 \cdot \log(8/2) = 6.02 \text{ dB}$
3. 3 Uplink: time slot ratio = 8:3 => $10 \cdot \log(8/3) = 4.26 \text{ dB}$
4. 4 Uplink: time slot ratio = 8:4 => $10 \cdot \log(8/4) = 3.01 \text{ dB}$

Conclusions:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- For Head SAR Testing, GSM and DTM should be evaluated; therefore the EUT was set in **DTM Multi-slot class 11, Power Back-Off Disabled Mode** due its highest Frame Average Power (dBm)
- For Hotspot Mode SAR Testing, GSM and DTM should be evaluated, therefore the EUT was set in GPRS 4Tx, **Power Back-Off Enabled Mode** due its highest Frame Average Power (dBm)
- For Body-Worn SAR Testing, GPRS and DTM should be evaluated; therefore the EUT was set in **DTM Multi-slot class 11, Power Back-Off Disabled Mode** slots due its highest Frame Average Power (dBm)

7.5. RF Output Average Power Measurement: 3G**7.5.1. WCDMA Band 2 and Band 5 on RMC / HSDPA / HSUPA modes
Power Back-Off NOT Supported**

Modes		HSDPA				HSUPA					WCDMA
Sets		1	2	3	4	1	2	3	4	5	Voice / RMC 12.2kbps
Band	Channel	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]
850 (Band 5)	4132 4357	24.4	24.4	24.0	24.1	24.1	22.3	24.0	22.2	24.3	24.4
	4183 4408	24.4	24.4	24.0	24.0	23.9	22.9	23.9	22.9	24.4	24.4
	4233 4458	24.5	24.5	24.1	24.1	23.7	23.0	23.8	23.0	24.5	24.5

Power Back-Off Supported & Disabled

1900 (Band 2)	9262 9662	23.2	23.2	23.2	23.2	23.1	21.9	23.1	21.8	23.1	23.8
	9400 9800	23.2	23.2	23.3	23.3	23.2	21.9	23.1	21.8	23.1	23.9
	9538 9938	23.2	23.2	23.3	23.3	22.8	21.5	22.9	21.4	23.1	23.8
Bc		2	12	15	15	11	6	15	2	15	
Bd		15	15	8	4	15	15	9	15	15	
Δ ACK, Δ NACK, Δ CQI		8	8	8	8	8	8	8	8	8	
AGV		-	-	-	-	20	12	15	17	21	

7.5.2. WCDMA Band 2 and Band 5 on DC-HSDPA (Cat 24)**Power Back-Off NOT Supported**

Modes		DC HSDPA (Cat 24)				WCDMA
Sets		1	2	3	4	Voice / RMC 12.2kbps
Band	Channel	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]
850 (Band 5)	4132 4357	21.5	21.7	21.7	21.9	24.4
	4183 4408	21.6	21.8	21.6	21.8	24.4
	4233 4458	21.7	21.8	21.7	21.9	24.5

Power Back-Off Supported & Disabled

1900 (Band 2)	9262 9662	20.9	21.3	21.2	20.9	23.8
	9400 9800	21.2	21.4	21.3	21.3	23.9
	9538 9938	21.1	20.1	21.2	21.1	23.7
Bc		2	12	15	15	
Bd		15	15	8	4	
Δ ACK, Δ NACK, Δ CQI		8	8	8	8	
AGV		-	-	-	-	

7.5.3. WCDMA Band 2 and Band 5 on RMC / HSDPA / HSUPA : Power Back-Off Supported & Enabled

Modes		HSDPA				HSUPA					WCDMA
Sets		1	2	3	4	1	2	3	4	5	Voice / RMC 12.2kbps
Band	Channel	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]
1900 (Band 2)	9262 9662	16.9	16.9	16.9	17.0	16.8	16.1	16.7	16.2	17.0	17.4
	9400 9800	16.9	16.9	17.0	16.9	16.8	16.2	16.7	16.1	16.9	17.4
	9538 9938	16.9	16.9	16.8	16.9	16.8	16.1	16.8	16.1	16.9	17.3

Power Back-Off Supported & Enabled

Modes		DC HSDPA (Cat 24)				WCDMA
Sets		1	2	3	4	Voice / RMC 12.2kbps
Band	Channel	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]
1900 (Band 2)	9262 9662	16.5	15.9	16.5	16.0	17.4
	9400 9800	16.5	16.0	16.4	16.0	17.4
	9538 9938	16.4	15.9	16.4	16.0	17.3
Bc		2	12	15	15	
Bd		15	15	8	4	
Δ ACK, Δ NACK, Δ CQI		8	8	8	8	
AGV		-	-	-	-	

The module power levels were measured in both HSPA and 3G RMC 12.2kbps modes and compared to ensure the correct mode of operation had been established.

The following tables taken from FCC 3G SAR procedures (KDB 941225 D01 SAR test for 3G devices) below were applied using an wireless communications test set which supports 3G / HSDPA release 5 / HSUPA release 6.

Sub-test Setup for Release 5 HSDPA

Sub-test	β_c	β_d	B_d (SF)	$\beta_{cl} \beta_d$	$\beta_{hs}^{(1)}$	SM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_{cl} \beta_d = 12/15$, $B_{hs}/\beta_c = 24/15$

Note 3: For subtest 2 the $\beta_{cl} \beta_d$ ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

Sub-test Setup for Release 6 HSUPA

Sub-test	β_c	β_d	B_d (SF)	$\beta_{cl} \beta_d$	$\beta_{hs}^{(1)}$	B_{oc}	B_{od}	B_{od} (SF)	B_{od} (codes)	CM ⁽²⁾ (dB)	Power Back-Off (dB)	AG ⁽⁴⁾) Index	E- TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	31/15	B_{al1} : 47/15 B_{al2} : 47/15	4	1	2.0	1.0	15	92
4	2/15	15/15	64	2/15	2/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	24/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_{cl} \beta_d = 12/15$, $B_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH AND E-DPCCH for the Power Back-Off is based on the relative CM difference.

Note 3: For subtest 1 the $\beta_{cl} \beta_d$ ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the $\beta_{cl} \beta_d$ ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: B_{od} can not be set directly; it is set by Absolute Grant Value.

7.6. RF Output Average Power Measurement: LTE**7.6.1.LTE Band 5 (850 MHz)****Power Back-Off NOT Supported**

Ch. BW	Modulations	RB Config	Start RB Offset	Power Back-Off	Actual Max Power (dBm)	Measured Avg Power (dBm).		
						Frequency 829.0 MHz (Low)	Frequency 836.5 MHz (Middle)	Frequency 844.0 MHz (High)
10 MHz	QPSK	1	Low	0	(0)	23.0	23.0	23.0
		1	Mid	24	(0)	23.0	22.9	22.9
		1	High	49	(0)	23.0	23.0	23.0
		25	Low	0	(1)	22.0	22.1	22.1
		25	Mid	12	(1)	22.0	22.1	22.1
		25	High	25	(1)	22.0	22.1	22.1
		50	-	0	(1)	22.0	22.1	22.1
	16QAM	1	Low	0	(1)	22.0	22.2	22.3
		1	mid	24	(1)	22.0	22.1	22.1
		1	High	49	(1)	22.0	22.2	22.2
		25	Low	0	(2)	21.0	21.1	21.1
		25	Mid	12	(2)	21.0	21.0	21.0
		25	High	25	(2)	21.0	21.2	21.2
		50	-	0	(2)	21.0	21.1	21.1
Ch. BW	Modulations	RB Config	Start RB Offset	Power Back-Off	Actual Max Power (dBm)	Measured Avg Power (dBm).		
						Frequency 826.5 MHz (Low)	Frequency 836.5 MHz (Middle)	Frequency 846.5 MHz (High)
5 MHz	QPSK	1	Low	0	(0)	23.0	23.1	23.1
		1	Mid	12	(0)	23.0	23.0	22.9
		1	High	24	(0)	23.0	23.0	23.1
		12	low	0	(1)	22.0	22.0	22.0
		12	Mid	6	(1)	22.0	22.0	22.0
		12	High	13	(1)	22.0	22.0	22.0
		25	-	0	(1)	22.0	22.0	22.0
	16QAM	1	Low	0	(1)	22.0	22.1	22.1
		1	Mid	12	(1)	22.0	22.0	21.9
		1	High	24	(1)	22.0	22.0	22.1
		12	low	0	(2)	21.0	21.0	21.0
		12	Mid	6	(2)	21.0	21.0	21.0
		12	High	13	(2)	21.0	21.0	21.0
		25	-	0	(2)	21.0	21.1	21.1

LTE Band 5 (850 MHz)**Power Back-Off NOT Supported (Continued):**

Ch. BW	Modulations	RB Config	Start RB Offset		Power Back-Off	Actual Max Power (dBm)	Measured Avg Power (dBm).		
							Frequency 825.5 MHz (Low)	Frequency 836.5 MHz (Middle)	Frequency 847.5 MHz (High)
3 MHz	QPSK	1	Low	0	(0)	23.0	22.9	22.9	22.9
		1	Mid	7	(0)	23.0	22.9	22.9	22.9
		1	High	14	(0)	21.5	23.0	23.0	23.0
		8	Low	0	(1)	23.0	22.1	22.1	22.1
		8	Mid	4	(1)	22.0	22.1	22.0	22.0
		8	High	7	(1)	22.0	22.1	22.1	22.1
		15	-	0	(1)	22.0	22.0	22.0	22.0
	16QAM	1	Low	0	(1)	22.0	22.2	22.2	22.2
		1	Mid	7	(1)	22.0	22.1	22.1	22.1
		1	High	14	(1)	22.0	22.3	22.3	22.3
		8	Low	0	(2)	21.0	21.1	21.1	21.1
		8	Mid	4	(2)	21.0	21.1	21.1	21.1
		8	High	7	(2)	21.0	21.1	21.1	21.1
		15	-	0	(2)	21.0	21.1	21.1	21.1
Ch. BW	Modulations	RB Config	Start RB Offset		Power Back-Off	Actual Max Power (dBm)	Measured Avg Power (dBm).		
							Frequency 824.7 MHz (Low)	Frequency 836.5 MHz (Middle)	Frequency 848.3 MHz (High)
1.4 MHz	QPSK	1	Low	0	(0)	23.0	23.1	23.0	23.0
		1	Mid	3	(0)	23.0	23.0	23.0	23.0
		1	High	5	(0)	23.0	23.0	23.0	23.0
		3	Low	0	(0)	23.0	23.0	23.0	23.0
		3	Mid	1	(0)	23.0	23.0	23.0	23.0
		3	high	3	(0)	23.0	23.0	23.0	23.0
		6	-	0	(1)	22.0	22.1	22.1	22.1
	16QAM	1	Low	0	(1)	22.0	22.1	22.1	22.1
		1	Mid	3	(1)	22.0	22.1	22.1	22.1
		1	High	5	(1)	22.0	22.2	22.1	22.1
		3	Low	0	(1)	22.0	22.0	22.0	22.0
		3	Mid	1	(1)	22.0	22.0	22.0	22.0
		3	high	3	(1)	22.0	22.0	22.0	22.0
		6	-	0	(2)	21.0	21.2	21.2	21.2

7.6.2.LTE Band 7 (2600 MHz)**Power Back-Off NOT Supported**

Ch. BW	Modulations	RB Config	Start RB Offset		Power Back-Off	Actual Max Power (dBm)	Measured Avg Power (dBm).		
							Frequency 2510.0 MHz (Low)	Frequency 2535.0 MHz (Middle)	Frequency 2560.0 MHz (High)
20 MHz	QPSK	1	Low	0	(0)	23.0	23.6	23.6	23.8
		1	Mid	49	(0)	23.0	23.6	23.6	23.6
		1	High	99	(0)	23.0	23.6	23.7	23.4
		50	low	0	(1)	22.0	22.7	22.8	23.0
		50	Mid	25	(1)	22.0	22.7	22.8	22.8
		50	High	50	(1)	22.0	22.7	22.8	22.8
		100	-	0	(1)	22.0	22.7	22.8	22.8
	16QAM	1	Low	0	(1)	22.0	22.5	23.0	22.7
		1	Mid	49	(1)	22.0	22.6	23.0	22.6
		1	High	99	(1)	22.0	22.9	22.6	22.6
		50	low	0	(2)	21.0	21.7	21.8	22.1
		50	Mid	25	(2)	21.0	21.7	21.7	21.8
		50	High	50	(2)	21.0	21.7	21.8	21.8
		100	-	0	(2)	21.0	21.8	21.8	21.9
Ch. BW	Modulations	RB Config	Start RB Offset		Power Back-Off	Actual Max Power (dBm)	Measured Avg Power (dBm).		
							Frequency 2507.5 MHz (Low)	Frequency 2535.0 MHz (Middle)	Frequency 2562.5 MHz (High)
15 MHz	QPSK	1	Low	0	(0)	23.0	23.7	23.7	23.7
		1	Mid	37	(1)	23.0	23.7	23.6	23.6
		1	High	74	(1)	23.0	23.7	23.7	23.5
		36	low	0	(1)	22.0	22.7	22.8	22.8
		36	Mid	19	(1)	22.0	22.7	22.8	22.8
		36	High	39	(1)	22.0	22.7	22.8	22.8
		75	-	0	(1)	22.0	22.7	22.8	22.9
	16QAM	1	Low	0	(1)	22.0	22.7	22.8	22.9
		1	Mid	37	(2)	22.0	22.7	22.8	22.7
		1	High	74	(2)	22.0	22.8	22.7	22.7
		36	low	0	(2)	21.0	21.7	21.8	21.8
		36	Mid	19	(2)	21.0	21.6	21.7	21.7
		36	High	39	(0)	21.0	21.7	21.7	21.8
		75	-	0	(0)	21.0	21.7	21.8	21.9

LTE Band 7 (2600 MHz)**Power Back-Off NOT Supported (Continued):**

Ch. BW	Modulations	RB Config	Start RB Offset		Power Back-Off	Actual Max Power (dBm)	Measured Avg Power (dBm).		
							Frequency 2505.0 MHz (Low)	Frequency 2535.0 MHz (Middle)	Frequency 2565.0 MHz (High)
10 MHz	QPSK	1	Low	0	(0)	23.0	23.7	23.6	23.8
		1	Mid	24	(0)	23.0	23.6	23.5	23.7
		1	High	49	(0)	23.0	23.6	23.7	23.5
		25	Low	0	(1)	22.0	22.6	22.8	22.7
		25	Mid	12	(1)	22.0	22.7	22.7	22.8
		25	High	25	(1)	22.0	22.7	22.7	22.7
		50	-	0	(1)	22.0	22.7	22.8	22.8
	16QAM	1	Low	0	(1)	22.0	22.5	22.9	22.7
		1	mid	24	(1)	22.0	22.7	22.7	22.9
		1	High	49	(1)	22.0	22.8	22.8	22.8
		25	Low	0	(2)	21.0	21.6	21.8	21.7
		25	Mid	12	(2)	21.0	21.7	21.7	21.8
		25	High	25	(2)	21.0	21.8	21.7	21.9
		50	-	0	(2)	21.0	21.7	21.8	21.8
Ch. BW	Modulations	RB Config	Start RB Offset		Power Back-Off	Actual Max Power (dBm)	Measured Avg Power (dBm).		
							Frequency 2510.0 MHz (Low)	Frequency 2535.0 MHz (Middle)	Frequency 2567.5 MHz (High)
5 MHz	QPSK	1	Low	0	(0)	23.0	23.6	23.6	23.7
		1	Mid	12	(1)	23.0	23.6	23.5	23.6
		1	High	24	(1)	23.0	23.6	23.5	23.4
		12	low	0	(1)	22.0	22.6	22.8	22.8
		12	Mid	6	(1)	22.0	22.6	22.7	22.7
		12	High	13	(1)	22.0	22.7	22.7	22.6
		25	-	0	(1)	22.0	22.6	22.7	22.7
	16QAM	1	Low	0	(1)	22.0	22.7	22.8	22.7
		1	Mid	12	(2)	22.0	22.8	22.7	22.7
		1	High	24	(2)	22.0	22.9	22.8	22.7
		12	low	0	(2)	21.0	21.6	21.8	21.7
		12	Mid	6	(2)	21.0	21.5	21.8	21.7
		12	High	13	(0)	21.0	21.6	21.7	21.7
		25	-	0	(0)	21.0	21.6	21.7	21.8

7.7.RF Output Average Power Measurement: Wi-Fi**7.7.1.Wi-Fi 802.11b/g/n (2.4 GHz)
Power Back-Off NOT Supported**

		Avg Power (dBm)	
Channel Number	Frequency (MHZ)	(1Mbps)	Operating Mode
1	2412.0	12.5	802.11b
6	2437.0	12.1	
11	2462.0	12.4	
Channel Number	Frequency (MHZ)	(6Mbps)	Operating Mode
1	2412.0	12.2	802.11g
6	2437.0	12.3	
11	2462.0	12.4	
Channel Number	Frequency (MHZ)	(6.5Mbps)	Operating Mode
1	2412.0	12.4	802.11n HT20
6	2437.0	12.1	
11	2462.0	12.3	

7.7.2.Wi-Fi802.11a/n/ac (5.0 GHz) –Sub Band 1 (5.2 GHz UNII)**Power Back-Off NOT Supported**

		Avg Power (dBm)	
Channel Number	Frequency (MHZ)	6 Mbps	Operating Mode
36	5180.0	15.4	802.11a
40	5200.0	15.4	
44	5220.0	15.3	
48	5240.0	15.4	
Channel Number	Frequency (MHZ)	6.5 Mbps	Operating Mode
36	5180.0	15.1	802.11n, HT20
40	5200.0	15.3	
44	5220.0	15.4	
48	5240.0	15.7	
Channel Number	Frequency (MHZ)	6.5 Mbps	Operating Mode
36	5180.0	15.2	802.11ac, VHT20
40	5200.0	15.4	
44	5220.0	15.3	
48	5240.0	15.7	
Channel Number	Frequency (MHZ)	13.5 Mbps	Operating Mode
38	5190.0	13.7	802.11n, HT40
46	5230.0	13.8	
Channel Number	Frequency (MHZ)	13.5 Mbps	Operating Mode
38	5190.0	13.7	802.11ac, VHT40
46	5230.0	13.8	
Channel Number	Frequency (MHZ)	29.3 Mbps	Operating Mode
42	5210.0	14.0	802.11ac, VHT80

7.7.3.Wi-Fi802.11a/n/ac (5.0 GHz) –Sub Band 2 (5.3 GHz UNII)**Power Back-Off NOT Supported**

		Avg Power (dBm)	
Channel Number	Frequency (MHZ)	6 Mbps	Operating Mode
52	5260.0	15.5	802.11a
56	5280.0	15.6	
60	5300.0	15.4	
64	5320.0	15.4	
Channel Number	Frequency (MHZ)	6.5 Mbps	Operating Mode
52	5260.0	15.4	802.11n, HT20
56	5280.0	15.6	
60	5300.0	15.5	
64	5320.0	15.5	
Channel Number	Frequency (MHZ)	6.5 Mbps	Operating Mode
52	5260.0	15.6	802.11ac, VHT20
56	5280.0	15.5	
60	5300.0	15.8	
64	5320.0	15.5	
Channel Number	Frequency (MHZ)	13.5 Mbps	Operating Mode
54	5270.0	14.1	802.11n, HT40
62	5310.0	13.8	
Channel Number	Frequency (MHZ)	13.5 Mbps	Operating Mode
54	5270.0	14.1	802.11ac, VHT40
62	5310.0	13.8	
Channel Number	Frequency (MHZ)	29.3 Mbps	Operating Mode
58	5290.0	13.8	802.11ac, VHT80

7.7.4.Wi-Fi802.11a/n/ac (5.0 GHz) –Sub Band 3 (5.5 GHz UNII) Power Back-Off NOT Supported

		Avg Power (dBm)	
Channel Number	Frequency (MHZ)	6 Mbps	Operating Mode
100	5500.0	16.1	802.11a
104	5520.0	15.9	
108	5540.0	16.2	
112	5560.0	16.1	
116	5580.0	16.2	
132	5660.0	16.0	
136	5680.0	15.9	
140	5700.0	15.9	
Channel Number	Frequency (MHZ)	6 Mbps	Operating Mode
100	5500.0	16.2	802.11n, HT20
104	5520.0	15.9	
108	5540.0	15.8	
112	5560.0	15.8	
116	5580.0	16.0	
132	5660.0	15.9	
136	5680.0	16.1	
140	5700.0	15.7	
Channel Number	Frequency (MHZ)	6.5 Mbps	Operating Mode
100	5500.0	15.8	802.11ac, VHT20
104	5520.0	16.2	
108	5540.0	16.2	
112	5560.0	15.8	
116	5580.0	16.0	
132	5660.0	15.9	
136	5680.0	16.1	
140	5700.0	16.0	
Channel Number	Frequency (MHZ)	13.5 Mbps	Operating Mode
102	5510.0	14.1	802.11n, HT40
110	5550.0	14.2	
134	5670.0	14.1	
Channel Number	Frequency (MHZ)	13.5 Mbps	Operating Mode
102	5510.0	14.3	802.11ac, VHT40
110	5550.0	14.2	
134	5670.0	14.0	
Channel Number	Frequency (MHZ)	29.3 Mbps	Operating Mode
106	5530.0	14.6	802.11ac, VHT80

7.7.5.Wi-Fi802.11a/n/ac (5.0 GHz) –Sub Band 4 (5.8 GHz UNII)**Power Back-Off NOT Supported**

		Avg Power (dBm)	
Channel Number	Frequency (MHZ)	6 Mbps	Operating Mode
149	5745.0	15.6	802.11a
153	5765.0	15.7	
157	5785.0	15.5	
161	5805.0	15.9	
165	5825.0	15.7	
Channel Number	Frequency (MHZ)	6.5 Mbps	Operating Mode
149	5745.0	15.6	802.11n, HT20
153	5765.0	15.6	
157	5785.0	15.7	
161	5805.0	15.8	
165	5825.0	15.6	
Channel Number	Frequency (MHZ)	6.5 Mbps	Operating Mode
149	5745.0	15.6	802.11ac, VHT20
153	5765.0	15.6	
157	5785.0	15.7	
161	5805.0	15.7	
165	5825.0	15.7	
Channel Number	Frequency (MHZ)	13.5 Mbps	Operating Mode
151	5755.0	14.0	802.11n, HT40
159	5795.0	13.8	
Channel Number	Frequency (MHZ)	13.5 Mbps	Operating Mode
151	5755.0	14.2	802.11ac, VHT40
159	5795.0	14.1	
Channel Number	Frequency (MHZ)	29.3 Mbps	Operating Mode
155	5775.0	14.1	802.11ac, VHT80

8. System Check and Dielectric Parameters

See [Appendix 5](#) and [Appendix 6](#) for tables and measurements.

9. Measurements, Examinations and Derived Results

9.1. General Comments

This section contains test results only.

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to section 8 for details of measurement uncertainties.

Prior to testing the FCC was contacted for LTE Release 10 SAR evaluations on the EUT and testing was performed as per KDB 941225 after their confirmation.

Prior to testing the FCC was contacted for Antenna Tuner SAR evaluations and testing was performed as per FCC response.

9.2. Specific Absorption Rate – Test Results**For All SAR measurement in this report the 1g-SAR limit tested to is 1.6 W/Kg****9.2.1. GSM 850 – Head – Power Back-Off Not Supported****Max Reported SAR = 0.317 (W/kg)**

Mod.	Separati on Dist (mm)	EUT Position	Channel Number	Freq. (MHz)	For LTE Only		Power (dBm)		1g SAR Results (W/kg)		Note(s)	Scan No.
					RB Allocation	RB Offset	Max Rated Power (dBm)	Meas. Avg Power (dBm)	Meas. Level (W/kg)	Reporte d SAR (W/kg)		
GMSK (DTM Class 9)	0	Touch Left	190	836.6	N/A	N/A	31.6	30.7	0.208	0.256	1, 2	1
GMSK (DTM Class 9)	0	Tilt Left	190	836.6	N/A	N/A	31.6	30.7	0.135	0.166	1, 2	2
GMSK (DTM Class 9)	0	Touch Right	190	836.6	N/A	N/A	31.6	30.7	0.258	0.317	1, 2	3
GMSK (DTM Class 9)	0	Tilt Right	190	836.6	N/A	N/A	31.6	30.7	0.153	0.188	1, 2	4

Note(s):

- DTM Multi-slot Class 9 - Tested using 2 Uplink time slots (with 1 time slots set as CS1 for GPRS and 1 time slot set for voice).
- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

9.2.2. GSM 850 Hotspot Mode – Power Back-Off Not Supported**Max Reported SAR = 0.572 (W/kg)**

Mod.	Separati on Dist (mm)	EUT Position	Channel Number	Freq. (MHz)	For LTE Only		Power (dBm)		1g SAR Results (W/kg)		Note(s)	Scan No.
					RB Allocat ion	RB Offset	Max Rated Power (dBm)	Meas. Avg Power (dBm)	Meas. Level (W/kg)	Reported SAR (W/kg)		
GMSK (Data 2 Slot)	10	Front	190	836.6	N/A	N/A	31.6	31.0	0.402	0.462	1	5
GMSK (Data 2 Slot)	10	Back	190	836.6	N/A	N/A	31.6	31.0	0.436	0.501	1	6
GMSK (Data 2 Slot)	10	Left Hand Side	190	836.6	N/A	N/A	31.6	31.0	0.233	0.268	1	7
GMSK (Data 2 Slot)	10	Right Hand Side	190	836.6	N/A	N/A	31.6	31.0	0.498	0.572	1	8
GMSK (Data 2 Slot)	10	Bottom	190	836.6	N/A	N/A	31.6	31.0	0.114	0.131	1	9

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

*KDB 941225 D03 - SAR is not required for EDGE and DTM technology when the maximum average output power is lower than that measured on the corresponding GPRS channels.

9.2.3. GSM 850 – Body-Worn – Power Back-Off Not Supported

Max Reported SAR = 0.434 (W/kg)

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
GMSK (DTM Class 9)	15	Front	190	836.6	N/A	N/A	31.6	30.7	0.333	0.410	1, 2	10
GMSK (DTM Class 9)	15	Back	190	836.6	N/A	N/A	31.6	30.7	0.353	0.434	1, 2	11

Note(s):

- DTM Multi-slot Class 9 - Tested using 2 Uplink time slots (with 1 time slots set as CS1 for GPRS and 1 time slot set for voice).
- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

*With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset. Hence, Body worn configurations were not evaluated with PHF attached.

9.2.4. PCS 1900 – Head – Power Back-Off Supported and Disabled

Max Reported SAR = 0.550 (W/kg)

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
GMSK (DTM Class 11)	0	Touch Left	661	1880.0	N/A	N/A	27.6	26.5	0.347	0.447	1, 2	12
GMSK (DTM Class 11)	0	Tilt Left	661	1880.0	N/A	N/A	27.6	26.5	0.154	0.198	1, 2	13
GMSK (DTM Class 11)	0	Touch Right	661	1880.0	N/A	N/A	27.6	26.5	0.427	0.550	1, 2	14
GMSK (DTM Class 11)	0	Tilt Right	661	1880.0	N/A	N/A	27.6	26.5	0.088	0.113	1, 2	15

Note(s):

- DTM Multi-slot Class 11 - Tested using 3 Uplink time slots (with 2 time slots set as CS1 for GPRS and 1 time slot set for voice).
- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

9.2.5. PCS 1900 – Hotspot Mode – Power Back-Off Supported and Enabled

Max Reported SAR = 1.437 (W/kg)

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
GMSK (Data 4 Slot)	10	Front	661	1880.0	N/A	N/A	22.5	21.1	0.201	0.277	1	16
GMSK (Data 4 Slot)	10	Back	661	1880.0	N/A	N/A	22.5	21.1	0.625	0.863	-	17
GMSK (Data 4 Slot)	10	Back	512	1850.2	N/A	N/A	22.5	21.1	0.546	0.754	-	18
GMSK (Data 4 Slot)	10	Back	810	1909.8	N/A	N/A	22.5	21.3	0.621	0.819	-	19
GMSK (Data 4 Slot)	10	Left Hand Side	661	1880.0	N/A	N/A	22.5	21.1	0.075	0.104	1	20
GMSK (Data 4 Slot)	10	Right Hand Side	661	1880.0	N/A	N/A	22.5	21.1	0.039	0.054	1	21
GMSK (Data 4 Slot)	10	Bottom	661	1880.0	N/A	N/A	22.5	21.1	0.981	1.354	-	22
GMSK (Data 4 Slot)	10	Bottom	512	1850.2	N/A	N/A	22.5	21.1	0.752	1.038	-	23
GMSK (Data 4 Slot)	10	Bottom	810	1909.8	N/A	N/A	22.5	21.3	1.090	1.437	2	24

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- As per 865664 D01, the highest SAR measured > 0.8 W/kg has been re-measured and included in the report in section 10.4 under **SAR Measurement Variability and Measurement Uncertainty Analysis Results** Table.

*KDB 941225 D03 - SAR is not required for EDGE technology when the maximum average output power is lower than that measured on the corresponding GPRS channels.

9.2.6. PCS 1900 – Body-Worn – Power Back-Off Supported and Disabled

Max Reported SAR = 0.970 (W/kg)

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
GMSK (DTM Class 11)	15	Front	661	1880.0	N/A	N/A	27.6	26.5	0.753	0.970	-	25
GMSK (DTM Class 11)	15	Front	512	1850.2	N/A	N/A	27.6	26.5	0.737	0.949	-	26
GMSK (DTM Class 11)	15	Front	810	1909.8	N/A	N/A	27.6	26.7	0.702	0.864	-	27
GMSK (DTM Class 11)	15	Back	661	1880.0	N/A	N/A	27.6	26.5	0.689	0.888	-	28
GMSK (DTM Class 11)	15	Back	512	1850.2	N/A	N/A	27.6	26.5	0.603	0.777	-	29
GMSK (DTM Class 11)	15	Back	810	1909.8	N/A	N/A	27.6	26.7	0.628	0.773	-	30

Note(s):

- DTM Multi-slot Class 11 - Tested using 3 Uplink time slots (with 2 time slots set as CS1 for GPRS and 1 time slot set for voice).

*With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset. Hence, Body worn configurations were not evaluated with PHF attached.

9.2.7. UMTS FDD 2 – Head – Power Back-Off Supported and Disabled**Max Reported SAR = 0.494 (W/kg)**

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
QPSK	0	Touch Left	9400	1880.0	N/A	N/A	24.0	23.9	0.304	0.311	1, 2	31
QPSK	0	Tilt Left	9400	1880.0	N/A	N/A	24.0	23.9	0.138	0.141	1, 2	32
QPSK	0	Touch Right	9400	1880.0	N/A	N/A	24.0	23.9	0.483	0.494	1, 2	33
QPSK	0	Tilt Right	9400	1880.0	N/A	N/A	24.0	23.9	0.124	0.127	1, 2	34

Note(s):

- Circuit Switch (CS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"
- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

9.2.8. UMTS FDD 2 – Hotspot Mode – Power Back-Off Supported and Enabled**Max Reported SAR = 1.064 (W/kg)**

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
QPSK	10	Front	9400	1880.0	N/A	N/A	18.0	17.4	0.609	0.699	1, 2	35
QPSK	10	Back	9400	1880.0	N/A	N/A	18.0	17.4	0.583	0.669	1, 2	36
QPSK	10	Left Hand Side	9400	1880.0	N/A	N/A	18.0	17.4	0.064	0.073	1, 2	37
QPSK	10	Right Hand Side	9400	1880.0	N/A	N/A	18.0	17.4	0.042	0.048	1, 2	38
QPSK	10	Bottom	9400	1880.0	N/A	N/A	18.0	17.4	0.848	0.974	1	39
QPSK	10	Bottom	9262	1852.4	N/A	N/A	18.0	17.4	0.685	0.786	1	40
QPSK	10	Bottom	9538	1907.6	N/A	N/A	18.0	17.3	0.906	1.064	1	41

Note(s):

- Circuit Switch (CS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"
- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

*KDB 941225 D02 - SAR is not required for RMC+HSPA (HSDPA/HSUPA) channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding RMC channels and 1g SAR level reported in 'RMC 12.2kbps' is <75% SAR limit.

9.2.9. UMTS FDD 2 – Body-Worn – Power Back-Off Supported and Disabled

Max Reported SAR = 1.197 (W/kg)

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
QPSK	15	Front	9400	1880.0	N/A	N/A	24.0	23.9	1.170	1.197	1, 2	42
QPSK	15	Front	9262	1852.4	N/A	N/A	24.0	23.8	1.050	1.099	1	43
QPSK	15	Front	9538	1907.6	N/A	N/A	24.0	23.8	1.120	1.173	1	44
QPSK	15	Back	9400	1880.0	N/A	N/A	24.0	23.9	0.970	0.993	1	45
QPSK	15	Back	9262	1852.4	N/A	N/A	24.0	23.8	0.888	0.930	1	46
QPSK	15	Back	9538	1907.6	N/A	N/A	24.0	23.7	0.903	0.968	1	47

Note(s):

1. Circuit Switch (CS) – RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All “1’s”
2. As per 865664 D01, the highest SAR measured > 0.8 W/kg has been re-measured and included in the report in section 10.4 under **SAR Measurement Variability and Measurement Uncertainty Analysis Results** Table.

*KDB 941225 D02 – SAR is not required for RMC+HSPA or RMC+DC-HSDPA (HSDPA/HSUPA/DC-HSDPA) channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding RMC channels and 1g SAR level reported in ‘RMC 12.2kbps’ is <75% SAR limit.

*As per 648474 D04 Handsets SAR v01r02, “When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset”. Hence, Body worn configurations were not evaluated with PHF attached.

9.2.10. UMTS FDD 5 – Head – Power Back-Off Not Supported**Max Reported SAR = 0.353 (W/kg)**

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
QPSK	0	Touch Left	4183	836.6	N/A	N/A	24.5	24.4	0.345	0.353	1, 2	48
QPSK	0	Tilt Left	4183	836.6	N/A	N/A	24.5	24.4	0.183	0.187	1, 2	49
QPSK	0	Touch Right	4183	836.6	N/A	N/A	24.5	24.4	0.327	0.335	1, 2	50
QPSK	0	Tilt Right	4183	836.6	N/A	N/A	24.5	24.4	0.191	0.195	1, 2	51

Note(s):

- Circuit Switch (CS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"
- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

9.2.11. UMTS FDD 5 – Hotspot Mode – Power Back-Off Not Supported**Max Reported SAR = 0.460 (W/kg)**

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
QPSK	10	Front	4183	836.6	N/A	N/A	24.5	24.4	0.422	0.432	1, 2	52
QPSK	10	Back	4183	836.6	N/A	N/A	24.5	24.4	0.450	0.460	1, 2	53
QPSK	10	Left Hand Side	4183	836.6	N/A	N/A	24.5	24.4	0.406	0.415	1, 2	54
QPSK	10	Right Hand Side	4183	836.6	N/A	N/A	24.5	24.4	0.211	0.216	1, 2	55
QPSK	10	Bottom	4183	836.6	N/A	N/A	24.5	24.4	0.143	0.146	1, 2	56

Note(s):

- Circuit Switch (CS) - RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"
- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

*KDB 941225 D02 - SAR is not required for RMC+HSPA (HSDPA/HSUPA) channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding RMC channels and 1g SAR level reported in 'RMC 12.2kbps' is <75% SAR limit.

9.2.12. UMTS FDD 5 – Body-Worn – Power Back-Off Not Supported**Max Reported SAR = 0.460 (W/kg)**

For body-worn configuration indicated below the test position overlap with hotspot and the power back –off was not supported meaning hotspot mode is most conservative.

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
QPSK	15	Front	4183	836.6	N/A	N/A	24.5	24.4	0.422	0.432	1	52
QPSK	15	Back	4183	836.6	N/A	N/A	24.5	24.4	0.450	0.460	1	53

Note(s):

1. Circuit Switch (CS) – RMC 12.2kbps with Test loop mode 1 and TPC bits configured to All "1's"

*KDB 941225 D02 – SAR is not required for RMC+HSPA or RMC+DC-HSDPA (HSDPA/HSUPA/DC-HSDPA) channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding RMC channels and 1g SAR level reported in 'RMC 12.2kbps' is <75% SAR limit.

*As per 648474 D04 Handsets SAR v01r02, "When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset". Hence, Body worn configurations were not evaluated with PHF attached.

9.2.13. GENERAL NOTE FOR LTE SAR TESTING

As per KDB 941225 D05 SAR for LTE Devices v02r02, the following steps were followed to perform SAR evaluation Largest Channel BW

1. QPSK 1RB Allocation

Start with 1RB offset Config with the highest maximum output power on required test channel (1RB low, 1RB high or 1RB mid). If value in (1) is $< 0.8\text{W/kg}$, testing of remaining RB offset configurations and test channels not required for 1RB

2. QPSK 50% RB Allocation

Apply steps followed in (1) for measuring 50% RB

3. QPSK 100% RB Allocation

SAR not required if highest output power from (1) and (2) is higher than 100% RB output power and if SAR Values in step (1) and (2) $\leq 0.8\text{W/kg}$

4. 16 QAM

Apply steps (1), (2) and (3) for testing 16-QAM/64-QAM, for each configuration SAR required only when highest maximum output power for the highest order modulation (ex. 16-QAM) $>$ QPSK by 0.5dB or when reported SAR for QPSK $> 1.45\text{W/kg}$

9.2.14. LTE Band 5; 10MHz Channel BW Head – Power Back-Off Not Supported

Max Reported SAR = 0.367 (W/kg)

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
QPSK	0	Touch Left	20525	836.5	1	0	24.0	23.1	0.298	0.367	1	57
QPSK	0	Touch Left	20525	836.5	25	12	23.0	22.1	0.234	0.288	1	58
QPSK	0	Tilt Left	20525	836.5	1	0	24.0	23.1	0.144	0.177	1	59
QPSK	0	Tilt Left	20525	836.5	25	12	23.0	22.1	0.107	0.132	1	60
QPSK	0	Touch Right	20525	836.5	1	0	24.0	23.1	0.241	0.296	1	61
QPSK	0	Touch Right	20525	836.5	25	12	23.0	22.1	0.204	0.251	1	62
QPSK	0	Tilt Right	20525	836.5	1	0	24.0	23.1	0.103	0.127	1	63
QPSK	0	Tilt Right	20525	836.5	25	12	23.0	22.1	0.086	0.106	1	64

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

9.2.15. LTE Band 5; 10MHz Channel BW – Hotspot Mode Power Back-Off Not Supported

Max Reported SAR = 0.410 (W/kg)

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
QPSK	10	Front	20525	836.5	1	0	24.0	23.1	0.319	0.392	1	65
QPSK	10	Front	20525	836.5	25	12	23.0	22.1	0.268	0.330	1	66
QPSK	10	Back	20525	836.5	1	0	24.0	23.1	0.341	0.410	1	67
QPSK	10	Back	20525	836.5	25	12	23.0	22.1	0.277	0.341	1	68
QPSK	10	Left Hand Side	20525	836.5	1	0	24.0	23.1	0.202	0.249	1	69
QPSK	10	Left Hand Side	20525	836.5	25	12	23.0	22.1	0.163	0.201	1	70
QPSK	10	Right Hand Side	20525	836.5	1	0	24.0	23.1	0.301	0.370	1	71
QPSK	10	Right Hand Side	20525	836.5	25	12	23.0	22.1	0.255	0.314	1	72
QPSK	10	Bottom	20525	836.5	1	0	24.0	23.1	0.078	0.096	1	73
QPSK	10	Bottom	20525	836.5	25	12	23.0	22.1	0.070	0.086	1	74

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

9.2.16. LTE Band 5; 10MHz Channel BW – Body-Worn – Power Back-Off Not Supported Max Reported SAR = 0.410 (W/kg)

For body-worn configuration indicated below the test position overlap with hotspot and the power back –off was not supported meaning hotspot mode is most conservative.

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
QPSK	15	Front	20525	836.5	1	0	24.0	23.1	0.319	0.392	1	65
QPSK	15	Front	20525	836.5	25	12	23.0	22.1	0.268	0.330	1	66
QPSK	15	Back	20525	836.5	1	0	24.0	23.1	0.341	0.410	1	67
QPSK	15	Back	20525	836.5	25	12	23.0	22.1	0.277	0.341	1	68

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

*KDB 941225 D02 - SAR is not required for RMC+HSPA (HSDPA/HSUPA) channels when the maximum average output power is less than ¼ dB higher than that measured on the corresponding RMC channels and 1g SAR level reported in 'RMC 12.2kbps' is <75% SAR limit.

*With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset. Hence, Body worn configurations were not evaluated with PHF attached.

9.2.17. LTE Band 7; 20MHz Channel BW Head – Power Back-Off Not Supported**Max Reported SAR = 0.444 (W/kg)**

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
QPSK	0	Touch Left	21350	2560.0	1	0	24.0	23.8	0.424	0.444	1	75
QPSK	0	Touch Left	21350	2560.0	50	0	23.0	23.0	0.420	0.420	1	76
QPSK	0	Tilt Left	21350	2560.0	1	0	24.0	23.8	0.076	0.080	1	77
QPSK	0	Tilt Left	21350	2560.0	50	0	23.0	23.0	0.054	0.054	1	78
QPSK	0	Touch Right	21350	2560.0	1	0	24.0	23.8	0.174	0.182	1	79
QPSK	0	Touch Right	21350	2560.0	50	0	23.0	23.0	0.143	0.143	1	80
QPSK	0	Tilt Right	21350	2560.0	1	0	24.0	23.8	0.115	0.120	1	81
QPSK	0	Tilt Right	21350	2560.0	50	0	23.0	23.0	0.085	0.085	1	82

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

9.2.18. LTE Band 7; 20MHz Channel BW – Hotspot Mode Power Back-Off Not Supported

Max Reported SAR = 1.250 (W/kg)

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
QPSK	10	Front	21350	2560.0	1	0	24.0	23.8	1.050	1.099	-	83
QPSK	10	Front	20850	2510.0	1	0	24.0	23.6	1.060	1.162	-	84
QPSK	10	Front	21100	2535.0	1	0	24.0	23.6	1.120	1.228	-	85
QPSK	10	Front	21350	2560.0	50	0	23.0	23.0	0.905	0.905	-	86
QPSK	10	Front	20850	2510.0	50	0	23.0	22.7	0.746	0.799	-	87
QPSK	10	Front	21100	2535.0	50	0	23.0	22.8	0.794	0.831	-	88
QPSK	10	Front	21100	2535.0	100	0	23.0	22.8	0.827	0.866	-	89
QPSK	10	Back	21350	2560.0	1	0	24.0	23.8	1.030	1.079	-	90
QPSK	10	Back	20850	2510.0	1	0	24.0	23.6	1.040	1.140	-	91
QPSK	10	Back	21100	2535.0	1	0	24.0	23.6	1.140	1.250	1	92
QPSK	10	Back	21350	2560.0	50	0	23.0	23.0	1.030	1.030	-	93
QPSK	10	Back	20850	2510.0	50	0	23.0	23.0	0.909	0.909	-	94
QPSK	10	Back	21100	2535.0	50	0	23.0	22.7	0.958	1.027	-	95
QPSK	10	Back	21100	2535.0	100	0	23.0	22.8	0.958	1.003	-	96
QPSK	10	Left Hand Side	21350	2560.0	1	0	24.0	23.8	0.415	0.435	-	97
QPSK	10	Left Hand Side	21350	2560.0	50	0	23.0	23.0	0.346	0.346	-	98
QPSK	10	Right Hand Side	21350	2560.0	1	0	24.0	23.8	0.115	0.120	-	99
QPSK	10	Right Hand Side	21350	2560.0	50	0	23.0	23.0	0.087	0.087	-	100
QPSK	10	Bottom	21350	2560.0	1	0	24.0	23.8	0.899	0.941	-	101
QPSK	10	Bottom	20850	2510.0	1	0	24.0	23.6	0.889	0.975	-	102
QPSK	10	Bottom	21100	2535.0	1	0	24.0	23.6	0.873	0.957	-	103
QPSK	10	Bottom	21350	2560.0	50	0	23.0	23.0	0.724	0.724	-	104
QPSK	10	Bottom	20850	2510.0	100	0	23.0	22.8	0.680	0.712	-	105
QPSK	10	Back with PHF	21100	2535.0	1	0	24.0	23.6	1.070	1.173	-	106

Note(s):

- As per 865664 D01, the highest SAR measured > 0.8 W/kg has been re-measured and included in the report in section 10.4 under **SAR Measurement Variability and Measurement Uncertainty Analysis Results** Table.

9.2.19. LTE Band 7; 20MHz Channel BW – Body-Worn – Power Back-Off Not Supported Max Reported SAR = 1.250 (W/kg)

For body-worn configuration indicated below the test position overlap with hotspot and the power back –off was not supported meaning hotspot mode is most conservative.

Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	For LTE Only		Power (dBm)		1g: SAR Results (W/kg)		Note(s)	Scan No.
					RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)		
QPSK	15	Front	21350	2560.0	1	0	24.0	23.8	1.050	1.099	-	83
QPSK	15	Front	20850	2510.0	1	0	24.0	23.6	1.060	1.162	-	84
QPSK	15	Front	21100	2535.0	1	0	24.0	23.6	1.120	1.228	-	85
QPSK	15	Front	21350	2560.0	50	0	23.0	23.0	0.905	0.905	-	86
QPSK	15	Front	20850	2510.0	50	0	23.0	22.7	0.746	0.799	-	87
QPSK	15	Front	21100	2535.0	50	0	23.0	22.8	0.794	0.831	-	88
QPSK	15	Front	21100	2535.0	100	0	23.0	22.8	0.827	0.866	-	89
QPSK	15	Back	21350	2560.0	1	0	24.0	23.8	1.030	1.079	-	90
QPSK	15	Back	20850	2510.0	1	0	24.0	23.6	1.040	1.140	-	91
QPSK	15	Back	21100	2535.0	1	0	24.0	23.6	1.140	1.250	1	92
QPSK	15	Back	21350	2560.0	50	0	23.0	23.0	1.030	1.030	-	93
QPSK	15	Back	20850	2510.0	50	0	23.0	23.0	0.909	0.909	-	94
QPSK	15	Back	21100	2535.0	50	0	23.0	22.7	0.958	1.027	-	95
QPSK	15	Back	21100	2535.0	100	0	23.0	22.8	0.958	1.003	-	96
QPSK	15	Back with PHF	21100	2535.0	1	0	24.0	23.6	1.070	1.173	2	106

Note(s):

- As per 865664 D01, the highest SAR measured > 0.8 W/kg has been re-measured and included in the report in section 10.4 under **SAR Measurement Variability and Measurement Uncertainty Analysis Results** Table.
- As per 648474 D04 Handsets SAR v01r02, "When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset". Hence, Body worn configuration was evaluated for Back with PHF attached.

9.2.20. Wi-Fi 2.4 GHz – Head – Power Back-Off Not Supported**Max Reported SAR = 0.743 (W/kg)**

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
DBPSK (802.11b 1Mbps)	0	Touch Left	6	2437.0	N/A	N/A	13.5	12.1	0.220	0.304	1	107
DBPSK (802.11b 1Mbps)	0	Tilt Left	6	2437.0	N/A	N/A	13.5	12.1	0.116	0.160	1	108
DBPSK (802.11b 1Mbps)	0	Touch Right	6	2437.0	N/A	N/A	13.5	12.1	0.538	0.743	1	109
DBPSK (802.11b 1Mbps)	0	Tilt Right	6	2437.0	N/A	N/A	13.5	12.1	0.185	0.255	1	110

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

*KDB 248227 - SAR is not required for 802.11g/n channels when the maximum average output power is equal to that measured on the corresponding 802.11b channels.

9.2.21. Wi-Fi 2.4 GHz – Hotspot Mode – Power Back-Off Not Supported**Max Reported SAR = 0.080 (W/kg)**

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
DBPSK (802.11b 1Mbps)	10	Front	6	2437.0	N/A	N/A	13.5	12.1	0.058	0.080	1	111
DBPSK (802.11b 1Mbps)	10	Back	6	2437.0	N/A	N/A	13.5	12.1	0.026	0.036	1	112
DBPSK (802.11b 1Mbps)	10	Left Hand Side	6	2437.0	N/A	N/A	13.5	12.1	0.007	0.010	1	113
DBPSK (802.11b 1Mbps)	10	Top	6	2437.0	N/A	N/A	13.5	12.1	0.000	0.000	1	114

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

*KDB 248227 - SAR is not required for 802.11g/n channels when the maximum average output power is equal to that measured on the corresponding 802.11b channels.

9.2.22. Wi-Fi 2.4 GHz – Body-Worn – Power Back-Off Not Supported**Max Reported SAR = 0.080 (W/kg)**

For body-worn configuration indicated below the test position overlap with hotspot and the power back –off was not supported meaning hotspot mode is most conservative.

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Separation Dist (mm)	EUT Position	Channel No.	Freq (MHz)	RB Allocation	RB Offset	Tune up limit	Meas.	Meas. Level (W/kg)	Reported SAR (W/kg)	Note(s)	Scan No.
DBPSK (802.11b 1Mbps)	15	Front	6	2437.0	N/A	N/A	13.5	12.1	0.058	0.080	1	111
DBPSK (802.11b 1Mbps)	15	Back	6	2437.0	N/A	N/A	13.5	12.1	0.026	0.036	1	112

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

*KDB 248227 - SAR is not required for 802.11g/n channels when the maximum average output power is equal to that measured on the corresponding 802.11b channels

9.2.23. Wi-Fi 5.0 GHz – Head – Power Back-Off Not Supported

Max Reported SAR =0.798 (W/kg)

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Dist (mm)	Test Position	Ch No.	Freq (MHz)	RB Allocation	RB Offset	Tune-up limit	Meas.	Meas.	Scaled	Note(s)	Scan No.
BPSK (802.11a HT20 6Mbps)	0	Touch Left	48	5240.0	N/A	N/A	16.3	15.4	0.185	0.228	1	115
BPSK (802.11a HT20 6Mbps)	0	Tilt Left	48	5240.0	N/A	N/A	16.3	15.4	0.188	0.231	1	116
BPSK (802.11a HT20 6Mbps)	0	Touch Right	48	5240.0	N/A	N/A	16.3	15.4	0.649	0.798	1	117
BPSK (802.11a HT20 6Mbps)	0	Tilt Right	48	5240.0	N/A	N/A	16.3	15.4	0.295	0.363	1	118
BPSK (802.11a HT20 6Mbps)	0	Touch Right	56	5280.0	N/A	N/A	16.3	15.6	0.521	0.612	1	119
BPSK (802.11a HT20 6Mbps)	0	Touch Right	108	5540.0	N/A	N/A	16.5	16.2	0.208	0.223	1	120
BPSK (802.11a HT20 6Mbps)	0	Touch Right	161	5805.0	N/A	N/A	16.5	15.9	0.278	0.319	1	121
BPSK (802.11ac VHT40 13.5Mbps)	0	Touch Right	46	5230.0	N/A	N/A	14.3	13.8	0.450	0.505	1	122
BPSK (802.11ac VHT40 13.5Mbps)	0	Touch Right	54	5270.0	N/A	N/A	14.3	14.1	0.446	0.467	1	123
BPSK (802.11ac VHT40 13.5Mbps)	0	Touch Right	102	5510.0	N/A	N/A	14.7	14.3	0.226	0.248	1	124
BPSK (802.11ac VHT40 13.5Mbps)	0	Touch Right	151	5755.0	N/A	N/A	14.7	14.2	0.203	0.228	1	125
BPSK (802.11ac VHT80 29.3Mbps)	0	Touch Right	42	5210.0	N/A	N/A	14.2	14.0	0.375	0.393	1	126
BPSK (802.11ac VHT80 29.3Mbps)	0	Touch Right	58	5290.0	N/A	N/A	14.2	13.8	0.479	0.525	1	127
BPSK (802.11ac VHT80 29.3Mbps)	0	Touch Right	106	5530.0	N/A	N/A	14.5	14.6	0.240	0.235	1	128
BPSK (802.11ac VHT80 29.3Mbps)	0	Touch Right	155	5775.0	N/A	N/A	14.5	14.1	0.134	0.147	1	129

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

*KDB 248227 - SAR is not required for 802.11n HT20 / 802.11ac VHT20 channels as the maximum average output power is less than ¼ dB higher than 802.11a.

*KDB 248227 - SAR is not required for 802.11n HT40 channels as the maximum average output power is less than ¼ dB higher than 802.11ac VHT40.

9.2.24. Wi-Fi 5.0 GHz Hotspot Mode – Power Back-Off Not Supported

Max Reported SAR = 0.385 (W/kg)

Mode or Modulation	Dist (mm)	Test Position	Ch No.	Freq (MHz)	For LTE Only		Power (dBm)		1g: SAR Results (W/kg)		Note(s)	Scan No.
					RB Allocation	RB Offset	Tune-up limit	Meas.	Meas.	Scaled		
BPSK (802.11a HT20 6Mbps)	10	Front	48	5240.0	N/A	N/A	16.3	15.4	0.000	0.000	1, 2	-
BPSK (802.11a HT20 6Mbps)	10	Back	48	5240.0	N/A	N/A	16.3	15.4	0.210	0.258	1	130
BPSK (802.11a HT20 6Mbps)	10	Left Hand Side	48	5240.0	N/A	N/A	16.3	15.4	0.045	0.055	1	131
BPSK (802.11a HT20 6Mbps)	10	Top	48	5240.0	N/A	N/A	16.3	15.4	0.020	0.025	1	132
BPSK (802.11a HT20 6Mbps)	10	Back	56	5280.0	N/A	N/A	16.3	15.6	0.328	0.385	1	133
BPSK (802.11a HT20 6Mbps)	10	Back	108	5540.0	N/A	N/A	16.5	16.2	0.000	0.000	1, 2	-
BPSK (802.11a HT20 6Mbps)	10	Back	161	5805.0	N/A	N/A	16.5	15.9	0.088	0.101	1	134
BPSK (802.11ac VHT40 13.5Mbps)	10	Back	46	5230.0	N/A	N/A	14.3	13.8	0.188	0.211	1	135
BPSK (802.11ac VHT40 13.5Mbps)	10	Back	54	5270.0	N/A	N/A	14.3	14.1	0.226	0.237	1	136
BPSK (802.11ac VHT40 13.5Mbps)	10	Back	102	5510.0	N/A	N/A	14.7	14.3	0.052	0.057	1	137
BPSK (802.11ac VHT40 13.5Mbps)	10	Back	151	5755.0	N/A	N/A	14.7	14.2	0.053	0.059	1	138
BPSK (802.11ac VHT80 29.3Mbps)	10	Back	42	5210.0	N/A	N/A	14.2	14.0	0.078	0.082	1	139
BPSK (802.11ac VHT80 29.3Mbps)	10	Back	58	5290.0	N/A	N/A	14.2	13.8	0.032	0.035	1	140
BPSK (802.11ac VHT80 29.3Mbps)	10	Back	106	5530.0	N/A	N/A	14.5	14.6	0.051	0.050	1	141
BPSK (802.11ac VHT80 29.3Mbps)	10	Back	155	5775.0	N/A	N/A	14.5	14.1	0.059	0.065	1	142

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- The 1g-SAR Value measured was below noise floor.

*KDB 248227 - SAR is not required for 802.11n HT20 / 802.11ac VHT20 channels as the maximum average output power is less than ¼ dB higher than 802.11a.

*KDB 248227 - SAR is not required for 802.11n HT40 channels as the maximum average output power is less than ¼ dB higher than 802.11ac VHT40.

9.2.25. Wi-Fi 5.0 GHz – Body-Worn – Power Back-Off Not Supported**Max Reported SAR = 0.385 (W/kg)**

For body-worn configuration indicated below the test position overlap with hotspot and the power back –off was not supported meaning hotspot mode is most conservative.

					For LTE Only		Power (dBm)		1g: SAR Results (W/kg)			
Mode or Modulation	Dist (mm)	Test Position	Ch No.	Freq (MHz)	RB Allocation	RB Offset	Tune-up limit	Meas.	Meas.	Scaled	Note(s)	Scan No.
BPSK (802.11a HT20 6Mbps)	10	Front	48	5240.0	N/A	N/A	16.3	15.4	0.000	0.000	1, 2	-
BPSK (802.11a HT20 6Mbps)	10	Back	48	5240.0	N/A	N/A	16.3	15.4	0.210	0.258	1	130
BPSK (802.11a HT20 6Mbps)	10	Back	56	5280.0	N/A	N/A	16.3	15.6	0.328	0.385	1	133
BPSK (802.11a HT20 6Mbps)	10	Back	108	5540.0	N/A	N/A	16.5	16.2	0.000	0.000	1, 2	-
BPSK (802.11a HT20 6Mbps)	10	Back	161	5805.0	N/A	N/A	16.5	15.9	0.088	0.101	1	134
BPSK (802.11ac VHT40 13.5Mbps)	10	Back	46	5230.0	N/A	N/A	14.3	13.8	0.188	0.211	1	135
BPSK (802.11ac VHT40 13.5Mbps)	10	Back	54	5270.0	N/A	N/A	14.3	14.1	0.226	0.237	1	136
BPSK (802.11ac VHT40 13.5Mbps)	10	Back	102	5510.0	N/A	N/A	14.7	14.3	0.052	0.057	1	137
BPSK (802.11ac VHT40 13.5Mbps)	10	Back	151	5755.0	N/A	N/A	14.7	14.2	0.053	0.059	1	138
BPSK (802.11ac VHT80 29.3Mbps)	10	Back	42	5210.0	N/A	N/A	14.2	14.0	0.078	0.082	1	139
BPSK (802.11ac VHT80 29.3Mbps)	10	Back	58	5290.0	N/A	N/A	14.2	13.8	0.032	0.035	1	140
BPSK (802.11ac VHT80 29.3Mbps)	10	Back	106	5530.0	N/A	N/A	14.5	14.6	0.051	0.050	1	141
BPSK (802.11ac VHT80 29.3Mbps)	10	Back	155	5775.0	N/A	N/A	14.5	14.1	0.059	0.065	1	142

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- The 1g-SAR Value measured was below noise floor.

*KDB 248227 - SAR is not required for 802.11n HT20 / 802.11ac VHT20 channels as the maximum average output power is less than ¼ dB higher than 802.11a.

*KDB 248227 - SAR is not required for 802.11n HT40 channels as the maximum average output power is less than ¼ dB higher than 802.11ac VHT40.

*With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset. Hence, Body worn configurations were not evaluated with PHF attached.

9.3. Bluetooth

9.3.1. Standalone SAR Test Exclusion Considerations

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	Result
(dBm)	(mW)			
10.0	1	10	2.480	0.2

Conclusion:

The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

9.3.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})}/x]$ W/kg for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Estimated SAR Result for Body-worn Accessory Conditions:

Test Configuration	Max. tune-up tolerance limit (mW)	Min. test separation distance (mm)	Frequency (GHz)	Estimated 1-g SAR (W/kg)
Back/Front	10	10	2.4	0.207
Back/Front	10	15	2.4	0.138

10. SAR measurement variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

10.1. Repeated Measurement Results

Exposure Configuration	Technology Band	Measured 1g –SAR (W/Kg)	Equipment Class	Max Meas. Source base Avg Power [dBm]	Ratio of Largest to Smallest SAR Measured
HOTSPOT (Separation Distance 10mm)	PCS1900	1.090	PCE	22.5	1.03
		1.060			
	UMTS FDD 2	1.170		24.0	1.08
		1.080			
	LTE Band 7	1.140		24.0	1.04
		1.100			

11. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured for both antennas in the pair, it is determined by the actual x, y, and z coordinates in the 1-g SAR for each SAR Peak Location; based on the extrapolated and interpolated result in the zoom scan measurement using the formula:

$$[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$$

A new threshold of 0.04 is also introduced in the KDB 447498. Thus, in order for a pair of simultaneously transmitting antennas, with the sum of 1-g SAR > 1.6 W/kg, to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

According to the worst case configuration Simultaneous transmission analysis of worst cases is shown in the tables below.

Overall Worst Cases considered in this section are indicated below:

1. WWAN + WLAN 2.4 GHz
2. WWAN + WLAN 5.0 GHz
3. WWAN + WPAN
4. WPAN + WLAN 5.0 GHz
5. WWAN + WLAN 5.0 GHz + WPAN

Simultaneous Transmission SAR Analysis (Continued)**Head 1g – Worst cases measurements WWAN + WLAN 2.4GHz**

EUT Position	Reported SAR 1g (W/Kg)				Sum of WWAN & WLAN
	WWAN			WLAN	
	GSM850	PCS1900	UMTS FDD 2	Wi-Fi 802.11b/g/n	
Touch Left	0.256			0.304	0.560
Tilt Left	0.166			0.160	0.326
Touch Right	0.317			0.743	1.060
Tilt Right	0.188			0.255	0.443
Touch Left		0.447		0.304	0.751
Tilt Left		0.198		0.160	0.358
Touch Right		0.550		0.743	1.293
Tilt Right		0.113		0.255	0.368
Touch Left			0.311	0.304	0.615
Tilt Left			0.141	0.160	0.301
Touch Right			0.494	0.743	1.237
Tilt Right			0.127	0.255	0.382

Head 1g – Worst cases measurements WWAN + WLAN 2.4GHz

EUT Position	Reported SAR 1g (W/Kg)				Sum of WWAN & WLAN
	WWAN			WLAN	
	UMTS FDD 5	LTE Band 5	LTE Band 7	Wi-Fi 802.11b/g/n	
Touch Left	0.353			0.304	0.657
Tilt Left	0.187			0.160	0.347
Touch Right	0.335			0.743	1.078
Tilt Right	0.195			0.255	0.450
Touch Left		0.367		0.304	0.671
Tilt Left		0.177		0.160	0.337
Touch Right		0.296		0.743	1.039
Tilt Right		0.127		0.255	0.382
Touch Left			0.444	0.304	0.748
Tilt Left			0.080	0.160	0.240
Touch Right			0.182	0.743	0.925
Tilt Right			0.120	0.255	0.375

Simultaneous Transmission SAR Analysis (Continued)**Hotspot Mode 1g – Worst cases measurements WWAN + WLAN 2.4GHz**

	Reported SAR 1g (W/Kg)				Sum of WWAN & WLAN
	WWAN			WLAN	
EUT Position	GSM850	PCS1900	UMTS FDD 2	Wi-Fi 802.11b/g/n	
Front	0.462			0.080	0.542
Back	0.501			0.036	0.537
Left Hand Side	0.268			0.010	0.278
Right Hand Side	0.572				0.572
Bottom	0.131				0.131
Top				0.000	0.000
Front		0.277		0.080	0.357
Back		0.863		0.036	0.899
Left Hand Side		0.104		0.010	0.114
Right Hand Side		0.054			0.054
Bottom		1.437			1.437
Top				0.000	0.000
Front			0.699	0.080	0.779
Back			0.669	0.036	0.705
Left Hand Side			0.073	0.010	0.083
Right Hand Side			0.048		0.048
Bottom			1.064		1.064
Top				0.000	0.000

Hotspot Mode 1g – Worst cases measurements WWAN + WLAN 2.4GHz

	Reported SAR 1g (W/Kg)				Sum of WWAN & WLAN
	WWAN			WLAN	
EUT Position	UMTS FDD 5	LTE Band 5	LTE Band 7	Wi-Fi 802.11b/g/n	
Front	0.432			0.080	0.512
Back	0.460			0.036	0.496
Left Hand Side	0.415			0.010	0.425
Right Hand Side	0.216				0.216
Bottom	0.146				0.146
Top				0.000	0.000
Front		0.392		0.080	0.472
Back		0.410		0.036	0.446
Left Hand Side		0.249		0.010	0.259
Right Hand Side		0.370			0.370
Bottom		0.096			0.096
Top				0.000	0.000
Front			1.228	0.080	1.308
Back			1.250	0.036	1.286
Left Hand Side			0.435	0.010	0.445
Right Hand Side			0.120		0.120
Bottom			0.975		0.975
Top				0.000	0.000

Simultaneous Transmission SAR Analysis (Continued)**Body-worn 1g – Worst cases measurements WWAN + WLAN 2.4GHz**

	Reported SAR 1g (W/Kg)				
	WWAN			WLAN	Sum of WWAN & WLAN
EUT Position	GSM850	PCS1900	UMTS FDD 2	Wi-Fi 802.11b/g/n	
Front	0.410			0.080	0.490
Back	0.434			0.036	0.470
Front		0.970		0.080	1.050
Back		0.888		0.036	0.924
Front			1.197	0.080	1.277
Back			0.993	0.036	1.029

Body-worn 1g – Worst cases measurements WWAN + WLAN 2.4GHz

	Reported SAR 1g (W/Kg)				
	WWAN			WLAN	Sum of WWAN & WLAN
EUT Position	UMTS FDD 5	LTE Band 5	LTE Band 7	Wi-Fi 802.11b/g/n	
Front	0.432			0.080	0.512
Back	0.460			0.036	0.496
Front		0.392		0.080	0.472
Back		0.410		0.036	0.446
Front			1.228	0.080	1.308
Back			1.250	0.036	1.286

Conclusion:

The sum of reported SAR does not exceed 1.6 W/kg in any of the above cases and hence, the SAR to peak location separation ratio distance was not calculated.

Simultaneous Transmission SAR Analysis (Continued)**Head 1g – Worst cases measurements WWAN + WLAN 5.0GHz**

EUT Position	Reported SAR 1g (W/Kg)				Sum of WWAN & WLAN
	WWAN			WLAN	
	GSM850	PCS1900	UMTS FDD 2	Wi-Fi 802.11a/n	
Touch Left	0.256			0.228	0.484
Tilt Left	0.166			0.231	0.397
Touch Right	0.317			0.798	1.115
Tilt Right	0.188			0.363	0.551
Touch Left		0.447		0.228	0.675
Tilt Left		0.198		0.231	0.429
Touch Right		0.550		0.798	1.348
Tilt Right		0.113		0.363	0.476
Touch Left			0.311	0.228	0.539
Tilt Left			0.141	0.231	0.372
Touch Right			0.494	0.798	1.292
Tilt Right			0.127	0.363	0.490

Head 1g – Worst cases measurements WWAN + WLAN 5.0GHz

EUT Position	Reported SAR 1g (W/Kg)				Sum of WWAN & WLAN
	WWAN			WLAN	
	UMTS FDD 5	LTE Band 5	LTE Band 7	Wi-Fi 802.11a/n	
Touch Left	0.353			0.228	0.581
Tilt Left	0.187			0.231	0.418
Touch Right	0.335			0.798	1.133
Tilt Right	0.195			0.363	0.558
Touch Left		0.367		0.228	0.595
Tilt Left		0.177		0.231	0.408
Touch Right		0.296		0.798	1.094
Tilt Right		0.127		0.363	0.490
Touch Left			0.444	0.228	0.672
Tilt Left			0.080	0.231	0.311
Touch Right			0.182	0.798	0.980
Tilt Right			0.120	0.363	0.483

Simultaneous Transmission SAR Analysis (Continued)**Hotspot Mode 1g – Worst cases measurements WWAN + WLAN 5.0GHz**

EUT Position	Reported SAR 1g (W/Kg)				Sum of WWAN & WLAN
	GSM850	WWAN PCS1900	UMTS FDD 2	WLAN Wi-Fi 802.11a/n	
Front	0.462			0.000	0.462
Back	0.501			0.385	0.886
Left Hand Side	0.268			0.055	0.323
Right Hand Side	0.572				0.572
Bottom	0.131				0.131
Top				0.025	0.025
Front		0.277		0.000	0.277
Back		0.863		0.385	1.248
Left Hand Side		0.104		0.055	0.159
Right Hand Side		0.054			0.054
Bottom		1.437			1.437
Top				0.025	0.025
Front			0.699	0.000	0.699
Back			0.669	0.385	1.054
Left Hand Side			0.073	0.055	0.128
Right Hand Side			0.048		0.048
Bottom			1.064		1.064
Top				0.025	0.025

Hotspot Mode 1g – Worst cases measurements WWAN + WLAN 5.0GHz

EUT Position	Reported SAR 1g (W/Kg)				Sum of WWAN & WLAN
	UMTS FDD 5	WWAN LTE Band 5	LTE Band 7	WLAN Wi-Fi 802.11a/n	
Front	0.432			0.000	0.432
Back	0.460			0.385	0.845
Left Hand Side	0.415			0.055	0.470
Right Hand Side	0.216				0.216
Bottom	0.146				0.146
Top				0.025	0.025
Front		0.392		0.000	0.392
Back		0.410		0.385	0.795
Left Hand Side		0.249		0.055	0.304
Right Hand Side		0.370			0.370
Bottom		0.096			0.096
Top				0.025	0.025
Front			1.228	0.000	1.228
Back			1.250	0.385	1.635 ¹
Left Hand Side			0.435	0.055	0.490
Right Hand Side			0.120		0.120
Bottom			0.975		0.975
Top				0.025	0.025

Simultaneous Transmission SAR Analysis (Continued)**Body-worn 1g – Worst cases measurements WWAN + WLAN 5.0GHz**

	Reported SAR 1g (W/Kg)				Sum of WWAN & WLAN
	WWAN			WLAN	
EUT Position	GSM850	PCS1900	UMTS FDD 2	Wi-Fi 802.11a/n	
Front	0.410			0.000	0.410
Back	0.434			0.385	0.819
Front		0.970		0.000	0.970
Back		0.888		0.385	1.273
Front			1.197	0.000	1.197
Back			0.993	0.385	1.378

Body-worn 1g – Worst cases measurements WWAN + WLAN 5.0GHz

	Reported SAR 1g (W/Kg)				Sum of WWAN & WLAN
	WWAN			WLAN	
EUT Position	UMTS FDD 5	LTE Band 5	LTE Band 7	Wi-Fi 802.11a/n	
Front	0.432			0.000	0.432
Back	0.460			0.385	0.845
Front		0.392		0.000	0.392
Back		0.410		0.385	0.795
Front			1.228	0.000	1.228
Back			1.250	0.385	1.635 ¹

Conclusion:

The sum of reported SAR does exceed 1.6 W/kg in one of the above cases and hence, the SAR to peak location separation ratio distance was calculated in section 11.1

Simultaneous Transmission SAR Analysis (Continued)**Hotspot Mode 1g – Worst cases measurements WWAN + WPAN**

	Reported SAR 1g (W/Kg)				Sum of WWAN & WPAN
	WWAN			WPAN	
EUT Position	GSM850	PCS1900	UMTS FDD 2	Bluetooth	
Front	0.462			0.207	0.669
Back	0.501			0.207	0.708
Left Hand Side	0.268			0.207	0.475
Right Hand Side	0.572				0.572
Bottom	0.131				0.131
Top				0.207	0.207
Front		0.277		0.207	0.484
Back		0.863		0.207	1.070
Left Hand Side		0.104		0.207	0.311
Right Hand Side		0.054			0.054
Bottom		1.437			1.437
Top				0.207	0.207
Front			0.699	0.207	0.906
Back			0.669	0.207	0.876
Left Hand Side			0.073	0.207	0.280
Right Hand Side			0.048		0.048
Bottom			1.064		1.064
Top				0.207	0.207

Hotspot Mode 1g – Worst cases measurements WWAN + WPAN

	Reported SAR 1g (W/Kg)				Sum of WWAN & WPAN
	WWAN			WPAN	
EUT Position	UMTS FDD 5	LTE Band 5	LTE Band 7	Bluetooth	
Front	0.432			0.207	0.639
Back	0.460			0.207	0.667
Left Hand Side	0.415			0.207	0.622
Right Hand Side	0.216				0.216
Bottom	0.146				0.146
Top				0.207	0.207
Front		0.392		0.207	0.599
Back		0.410		0.207	0.617
Left Hand Side		0.249		0.207	0.456
Right Hand Side		0.370			0.370
Bottom		0.096			0.096
Top				0.207	0.207
Front			1.228	0.207	1.435
Back			1.250	0.207	1.457
Left Hand Side			0.435	0.207	0.642
Right Hand Side			0.120		0.120
Bottom			0.975		0.975
Top				0.207	0.207

Simultaneous Transmission SAR Analysis (Continued)**Body-worn 1g – Worst cases measurements WWAN + WPAN**

EUT Position	Reported SAR 1g (W/Kg)				Sum of WWAN & WPAN
	WWAN			WPAN	
	GSM850	PCS1900	UMTS FDD 2	Bluetooth	
Front	0.410			0.138	0.548
Back	0.434			0.138	0.572
Front		0.970		0.138	1.108
Back		0.888		0.138	1.026
Front			1.197	0.138	1.335
Back			0.993	0.138	1.131

Body-worn 1g – Worst cases measurements WWAN + WPAN

EUT Position	Reported SAR 1g (W/Kg)				Sum of WWAN & WPAN
	WWAN			WPAN	
	UMTS FDD 5	LTE Band 5	LTE Band 7	Bluetooth	
Front	0.432			0.138	0.570
Back	0.460			0.138	0.598
Front		0.392		0.138	0.530
Back		0.410		0.138	0.548
Front			1.228	0.138	1.366
Back			1.250	0.138	1.388

Conclusion:

The sum of reported SAR does not exceed 1.6 W/kg in any of the above cases and hence, the SAR to peak location separation ratio distance was not calculated.

Simultaneous Transmission SAR Analysis (Continued)**Hotspot Mode 1g – Worst cases measurements WWAN + WLAN 5.0GHz + WPAN**

	Reported SAR 1g (W/Kg)					Sum of WWAN, WLAN & WPAN
	WWAN			WLAN	WPAN	
EUT Position	GSM850	PCS1900	UMTS FDD 2	Wi-Fi	Bluetooth	
Front	0.462			0.000	0.207	0.669
Back	0.501			0.385	0.207	1.093
Left Hand Side	0.268			0.055	0.207	0.530
Right Hand Side	0.572					0.572
Bottom	0.131					0.131
Top				0.025	0.207	0.232
Front		0.277		0.000	0.207	0.484
Back		0.863		0.385	0.207	1.455
Left Hand Side		0.104		0.055	0.207	0.366
Right Hand Side		0.054				0.054
Bottom		1.437				1.437
Top				0.025	0.207	0.232
Front			0.699	0.000	0.207	0.906
Back			0.669	0.385	0.207	1.261
Left Hand Side			0.073	0.055	0.207	0.335
Right Hand Side			0.048			0.048
Bottom			1.064			1.064
Top				0.025	0.207	0.232

Hotspot Mode 1g – Worst cases measurements WWAN + WLAN 5.0GHz + WPAN

	Reported SAR 1g (W/Kg)					Sum of WWAN, WLAN & WPAN
	WWAN			WLAN	WPAN	
EUT Position	UMTS FDD 5	LTE Band 5	LTE Band 7	Wi-Fi	Bluetooth	
Front	0.432			0.000	0.207	0.639
Back	0.460			0.385	0.207	1.052
Left Hand Side	0.415			0.055	0.207	0.677
Right Hand Side	0.216					0.216
Bottom	0.146					0.146
Top				0.025	0.207	0.232
Front		0.392		0.000	0.207	0.599
Back		0.410		0.385	0.207	1.002
Left Hand Side		0.249		0.055	0.207	0.511
Right Hand Side		0.370				0.370
Bottom		0.096				0.096
Top				0.025	0.207	0.232
Front			1.228	0.000	0.207	1.435
Back			1.250	0.385	0.207	1.842 ²
Left Hand Side			0.435	0.055	0.207	0.697
Right Hand Side			0.120			0.120
Bottom			0.975			0.975
Top				0.025	0.207	0.232

Conclusion:

The sum of reported SAR does exceed 1.6 W/kg in one of the above cases and hence, the SAR to peak location separation ratio distance was calculated in section 11.1

Simultaneous Transmission SAR Analysis (Continued)**Body-Worn 1g – Worst cases measurements WWAN + WLAN 5.0GHz + WPAN**

EUT Position	Reported SAR 1g (W/Kg)					Sum of WWAN, WLAN & WPAN
	WWAN			WLAN	WPAN	
	GSM850	PCS1900	UMTS FDD 2	Wi-Fi	Bluetooth	
Front	0.410			0.000	0.138	0.548
Back	0.434			0.385	0.138	0.957
Front		0.970		0.000	0.138	1.108
Back		0.888		0.385	0.138	1.411
Front			1.197	0.000	0.138	1.335
Back			0.993	0.385	0.138	1.516

Body-worn 1g – Worst cases measurements WWAN + WLAN 5.0GHz + WPAN


EUT Position	Reported SAR 1g (W/Kg)					Sum of WWAN, WLAN & WPAN
	WWAN			WLAN	WPAN	
	UMTS FDD 5	LTE Band 5	LTE Band 7	Wi-Fi	Bluetooth	
Front	0.432			0.000	0.138	0.570
Back	0.460			0.385	0.138	0.983
Front		0.392		0.000	0.138	0.530
Back		0.410		0.385	0.138	0.933
Front			1.228	0.000	0.138	1.366
Back			1.250	0.385	0.138	1.773 ³

Conclusion:

The sum of reported SAR does not exceed 1.6 W/kg in any of the above cases and hence, the SAR to peak location separation ratio distance was not calculated.

11.1. SAR to Peak Location Separation Ratio (SPLSR)

Case 1: The sum Back of EUT in Hotspot Mode for LTE Band 7 (CH21100) + WLAN 5.0 GHz (CH56) exceeded 1.6W/kg. Hence, SPLSR has been calculated for this combination below:

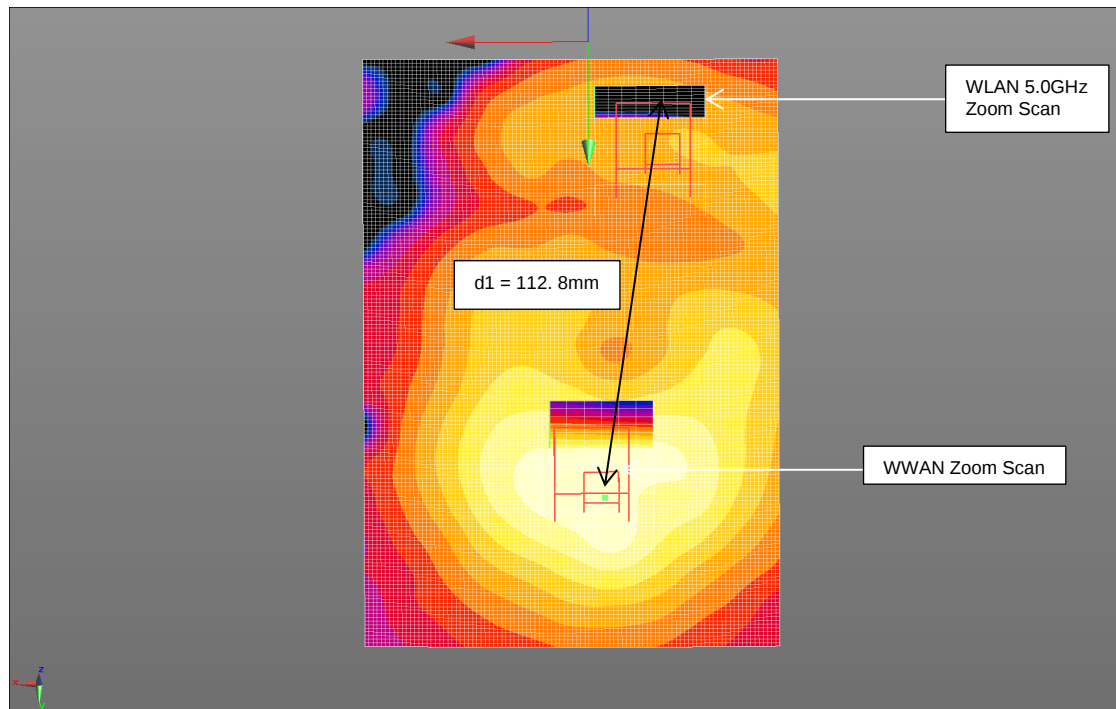

Mode	Peak SAR	X	Y	Z
	W/kg	m	m	m
LTE Band 7	1.250	-0.0036	0.0568	-0.173
WLAN 5.0 GHz	0.385	-0.022	-0.054	-0.184


d: Calculated distance (mm)	WWAN + WLAN	112.8
-----------------------------	-------------	-------

The Peak Location Separation Distance is computed by using the formula below:

$$\text{SQRT}((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$$

Case #	Test Position	Worst-case combination		Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)
		① LTE Band 7	② WLAN 5.0 GHz				
1	Back ① + ②	1.250	0.385	1.635	112.8	0.02	No

Case 2: The sum Back of EUT in Hotspot Mode for LTE Band 7 (CH21100) + WLAN 5.0 GHz (CH56) + WPAN exceeded 1.6W/kg. Hence, SPLSR has been calculated for this combination below:

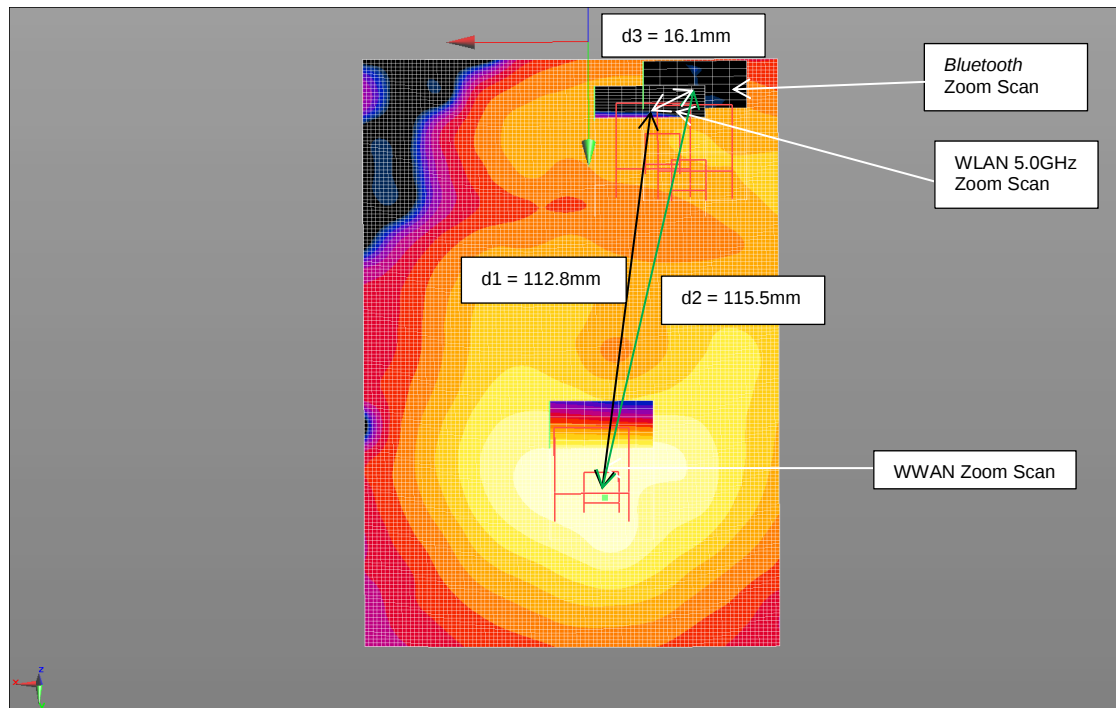

Mode	Peak SAR	X	Y	Z
	W/kg	m	m	m
LTE Band 7	1.250	-0.0036	0.0568	-0.173
WLAN 5.0 GHz	0.385	-0.022	-0.054	-0.184
Bluetooth	0.008	-0.036	-0.054	-0.176

d1: Calculated distance (mm)	WWAN + WLAN	112.8
d2: Calculated distance (mm)	WWAN + WPAN	115.5
d3: Calculated distance (mm)	WLAN + WPAN	16.12

The Peak Location Separation Distance is computed by using the formula below:

$$\text{SQRT}((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$$

Case #	Test Position	Worst-case combination			Σ 1-g SAR (W/kg)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)
		① LTE Band 7	② WLAN 5.0 GHz	③ Bluetooth				
2	Back ① + ②	1.250	0.385	-	1.635	112.8	0.02	No
2	Back ① + ③	1.250	-	0.008	1.258	115.5	0.01	No
2	Back ② + ③	-	0.385	0.008	0.393	16.1	0.02	No

Conclusion:

Simultaneous transmission SAR measurement (**Volume Scan**) is not required because SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

Note that for the purpose of calculation in Case 2, the Bluetooth SAR for Back on CH39 was measured and found to be 0.008W/kg. This measurement has been used for determining the peak SAR location and SPLSR calculation above.

Appendix 1. Test Equipment Used

UL No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A034	Narda 20W Termination	Narda	374BNM	8706	Calibrated as part of system	-
A1097	SMA Directional Coupler	MiDISCO	MDC6223-30	None	Calibrated as part of system	-
A1137	3dB Attenuator	Narda	779	04690	Calibrated as part of system	-
A1174	Dielectric Probe Kit	Agilent Technologies	85070C	Us99360072	Calibrated before use	-
A1328	Handset Positioner	Schmid & Partner Engineering AG	Modification	SD 000 H01 DA	-	-
A1182	Handset Positioner	Schmid & Partner Engineering AG	V3.0	None	-	-
A2111	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE3	432	28 Aug 2014	12
A2110	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE3	431	18 Nov 2014	12
A1234	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE3	450	12 Nov 2014	12
A2109	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE3	417	10 Apr 2014	12
A2546	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE4	1435	12 May 2014	12
A2547	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE4	1438	12 May 2014	12
A2077	Probe	Schmid & Partner Engineering AG	EX3 DV4	3814	24 Sep 2014	12
A1185	Probe	Schmid & Partner Engineering AG	ET3 DV6	1528	16 Apr 2014	12
A1186	Probe	Schmid & Partner Engineering AG	ET3 DV6	1529	22 May 2014	12
A2243	Probe	Schmid & Partner Engineering AG	ES3 DV3	3304	02 Sept 2014	12
A2436	Probe	Schmid & Partner Engineering AG	ES3 DV3	3335	09 Jan 2015	12
A2544	Probe	Schmid & Partner Engineering AG	EX3 DV4	3994	09 May 2015	12
A2545	Probe	Schmid & Partner Engineering AG	EX3 DV4	3995	09 May 2015	12
A2201	900 MHz Dipole Kit	Schmid & Partner Engineering AG	D900V2	035	20 Jan 2014	12
A2200	1900 MHz Dipole Kit	Schmid & Partner Engineering AG	D1900V2	537	22 Jan 2014	12
A2202	2440 MHz Dipole Kit	Schmid & Partner Engineering AG	D2440V2	701	14 Jan 2014	12
A2244	2600 MHz Dipole Kit	Schmid & Partner Engineering AG	D2600V2	1046	20 Aug 2013	12
A1377	5.0 GHz Dipole Kit	Schmid & Partner Engineering AG	D5GHzV2	1016	20 Feb 2014	12
A1497	Amplifier	Mini-Circuits	zh1-42w (sma)	e020105	Calibrated as part of system	-
A1566	SAM Phantom	Schmid & Partner Engineering AG	SAM a (Site 56)	002	Calibrated before use	-
A1238	SAM Phantom	Schmid & Partner Engineering AG	SAM b (Site 56)	001	Calibrated before use	-

UL No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A2125	SAM Phantom	Schmid & Partner Engineering AG	SAM b (Site 57)	TP-1031	Calibrated before use	-
A2124	SAM Phantom	Schmid & Partner Engineering AG	SAM a (Site 57)	TP-1030	Calibrated before use	-
A2438	SAM Phantom	Schmid & Partner Engineering AG	SAM a	1805	Calibrated before use	-
A2551	SAM Phantom	Schmid & Partner Engineering AG	SAM a	1832	Calibrated before use	-
A2552	SAM Phantom	Schmid & Partner Engineering AG	SAM a	1836	Calibrated before use	-
A2437	Eli Phantom	Schmid & Partner Engineering AG	Eli5	1235	Calibrated before use	-
A2252	2mm Oval Phantom	Schmid & Partner Engineering AG	Eli5	1177	Calibrated before use	-
A2549	2mm Oval Phantom	Schmid & Partner Engineering AG	Eli5	00T01 DA	Calibrated before use	-
A2550	2mm Oval Phantom	Schmid & Partner Engineering AG	Eli5	00T01 DA	Calibrated before use	-
A215	20 dB Attenuator	Narda	766-20	9402	Calibrated as part of system	-
A1531	Antenna	AARONIA AG	7025	02458	-	-
A2263	Digital Camera	Samsung	PL211	9453C90B 607487L	-	-
M1015	Network Analyser	Agilent Technologies	8753ES	US39172406	04 Oct 2013	12
C1145	Cable	Rosenberger MICRO-COAX	FA147A F003003030	41843-1	Calibrated as part of system	-
C1146	Cable	Rosenberger MICRO-COAX	FA147A F030003030	41752-1	Calibrated as part of system	-
G0528	Robot Power Supply	Schmid & Partner Engineering AG	DASY4	None	Calibrated before use	-
GO591	Robot Power Supply	Schmid & Partner Engineering AG	DASY4	None	Calibrated before use	-
G0592	Robot Power Supply	Schmid & Partner Engineering AG	DASY53	None	Calibrated before use	-
G0610	Robot Power Supply	Schmid & Partner Engineering AG	DASY53	None	Calibrated before use	-
G0611	Robot Power Supply	Schmid & Partner Engineering AG	DASY53	None	Calibrated before use	-
G0612	Robot Power Supply	Schmid & Partner Engineering AG	DASY53	None	Calibrated before use	-
G087	PSU	Thurlby Thandar	CPX200	100701	Calibrated before use	-
M1047	Robot Arm	Staubli	RX908 L	F00/SD8 9A1/A/01	Calibrated before use	-
M1653	Robot Arm	Staubli	RX908 L	F01/5J8 6A1/C/01	Calibrated before use	-
M1680	Robot Arm	Staubli	TX60 L	F12/5MZ7 A1/A/01	Calibrated before use	-
M1875	Robot Arm	Staubli	TX60 L	F13/5SC6F1/A/01	Calibrated before use	-
M1876	Robot Arm	Staubli	TX60 L	F14/5T5ZA1/A/01	Calibrated	-

UL No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
					before use	
M1877	Robot Arm	Staubli	TX60 L	F14/5UA6A1/A/01	Calibrated before use	-
M1839	Signal Generator	R&S	SME06	837633/001	15 Apr 2014	12
M1838	Signal Generator	R&S	SME06	831377/005	15 Apr 2014	12
M1270	Digital Thermometer	RS	N/A	N/A	Internal Cal 06 May 2014	12
M1013	Dual Channel Power Meter	R & S	NRVD	863715/0030	01 May 2014	12
S0566	SAR Lab	UL	Site 56	N/A	Calibrated before use	-
S0567	SAR Lab	UL	Site 57	N/A	Calibrated before use	-
S0568	SAR Lab	UL	Site 58	N/A	Calibrated before use	-
S0569	SAR Lab	UL	Site 59	N/A	Calibrated before use	-
S0570	SAR Lab	UL	Site 60	N/A	Calibrated before use	-
S0571	SAR Lab	UL	Site 61	N/A	Calibrated before use	-