



FCC CFR47 PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, ANT+ & NFC

FCC ID: PY7PM-0810

IC: 4170B-PM0810

REPORT NUMBER: 14U17929-4

ISSUE DATE: 2014-07-16

Prepared for

**SONY MOBILE COMMUNICATIONS, INC.
NYA VATTENTORNET MOBILVAGEN 10
LUND 22188
SWEDEN**

Prepared by

**UL VERIFICATION SERVICES INC.
1285 WALT WHITMAN RD
MELVILLE, NY 11747, U.S.A.
TEL: (631) 271-6200
FAX: (877) 854-3577**

NVLAP[®]

NVLAP LAB CODE 100255-0

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	7/16/14	Initial Issue	M. Antola

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. WORST-CASE CONFIGURATION AND MODE.....	8
5.5. DESCRIPTION OF TEST SETUP.....	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. MEASUREMENT METHODS	13
8. SUMMARY TABLE	14
9. ANTENNA PORT TEST RESULTS	15
9.1. 6 dB BANDWIDTH.....	15
9.1.1. 802.11b MODE IN THE 2.4 GHz BAND.....	16
9.1.2. 802.11g MODE IN THE 2.4 GHz BAND.....	16
9.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	16
9.2. 99% BANDWIDTH.....	23
9.2.1. 802.11b MODE IN THE 2.4 GHz BAND.....	23
9.2.2. 802.11g MODE IN THE 2.4 GHz BAND.....	23
9.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	23
9.3. AVERAGE POWER.....	Error! Bookmark not defined.
9.3.1. 802.11b MODE IN THE 2.4 GHz BAND.....	Error! Bookmark not defined.
9.3.2. 802.11g MODE IN THE 2.4 GHz BAND.....	Error! Bookmark not defined.
9.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	Error! Bookmark not defined.
9.4. OUTPUT POWER.....	Error! Bookmark not defined.
9.4.1. 802.11b MODE IN THE 2.4 GHz BAND.....	Error! Bookmark not defined.
9.4.2. 802.11g MODE IN THE 2.4 GHz BAND.....	Error! Bookmark not defined.
9.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	Error! Bookmark not defined.
9.5. PSD.....	34
9.5.1. 802.11b MODE IN THE 2.4 GHz BAND.....	34
9.5.2. 802.11g MODE IN THE 2.4 GHz BAND.....	34
9.5.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	34

9.6.	<i>OUT-OF-BAND EMISSIONS</i>	41
9.6.1.	802.11b MODE IN THE 2.4 GHz BAND	42
9.6.2.	802.11g MODE IN THE 2.4 GHz BAND	46
9.6.3.	802.11n MODE IN THE 2.4 GHz BAND	50
10.	RADIATED TEST RESULTS	54
10.1.	<i>LIMITS AND PROCEDURE</i>	54
10.2.	<i>TRANSMITTER ABOVE 1 GHz</i>	55
10.2.1.	TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND	55
10.2.2.	TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND	62
10.2.3.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND	69
10.3.	<i>WORST-CASE BELOW 1 GHz</i>	76
11.	AC POWER LINE CONDUCTED EMISSIONS	77
12.	SETUP PHOTOS	81

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, ANT+ & NFC
SERIAL NUMBER: 1906287
DATE TESTED: 7/2/14 – 7/11/14

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released
For UL Verification Services Inc. By:

Tested By:



PHILIP KIM
CONSUMER TECHNOLOGY DIVISION
PROGRAM MANAGER
UL Verification Services Inc.

MIKE ANTOLA
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2009.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

The test sites and measurement facilities used to collect data are located at 1285 Walt Whitman Rd. Melville, NY 11747, USA.

UL Melville is accredited by NVLAP, Laboratory Code 100255-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/1002550.htm>.

All antenna port conducted tests and AC line conducted emissions were performed at the UL-Fremont locations. All radiated testing was performed at the UL-Melville facility.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac + NFC & ANT+.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	15.2	33.11
2412 - 2462	802.11g	14.7	29.51
2412 - 2462	802.11n HT20	14	25.12

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the 802.11b/g/n HT20 modes with a maximum peak gain of -1.4dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

Based on customer feedback, the worst-case data rates were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20mode: MCS0

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Sony	EP880	3514W01 S08489 SEM 060	DoC
Earphone	Sony	MH410c	14071EB60060A84	DoC
MHL cable	Sony	N/A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A
1	USB	1	Mini-USB	Shielded	2m	HDMI cable

TEST SETUP

The EUT is a stand-alone unit during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

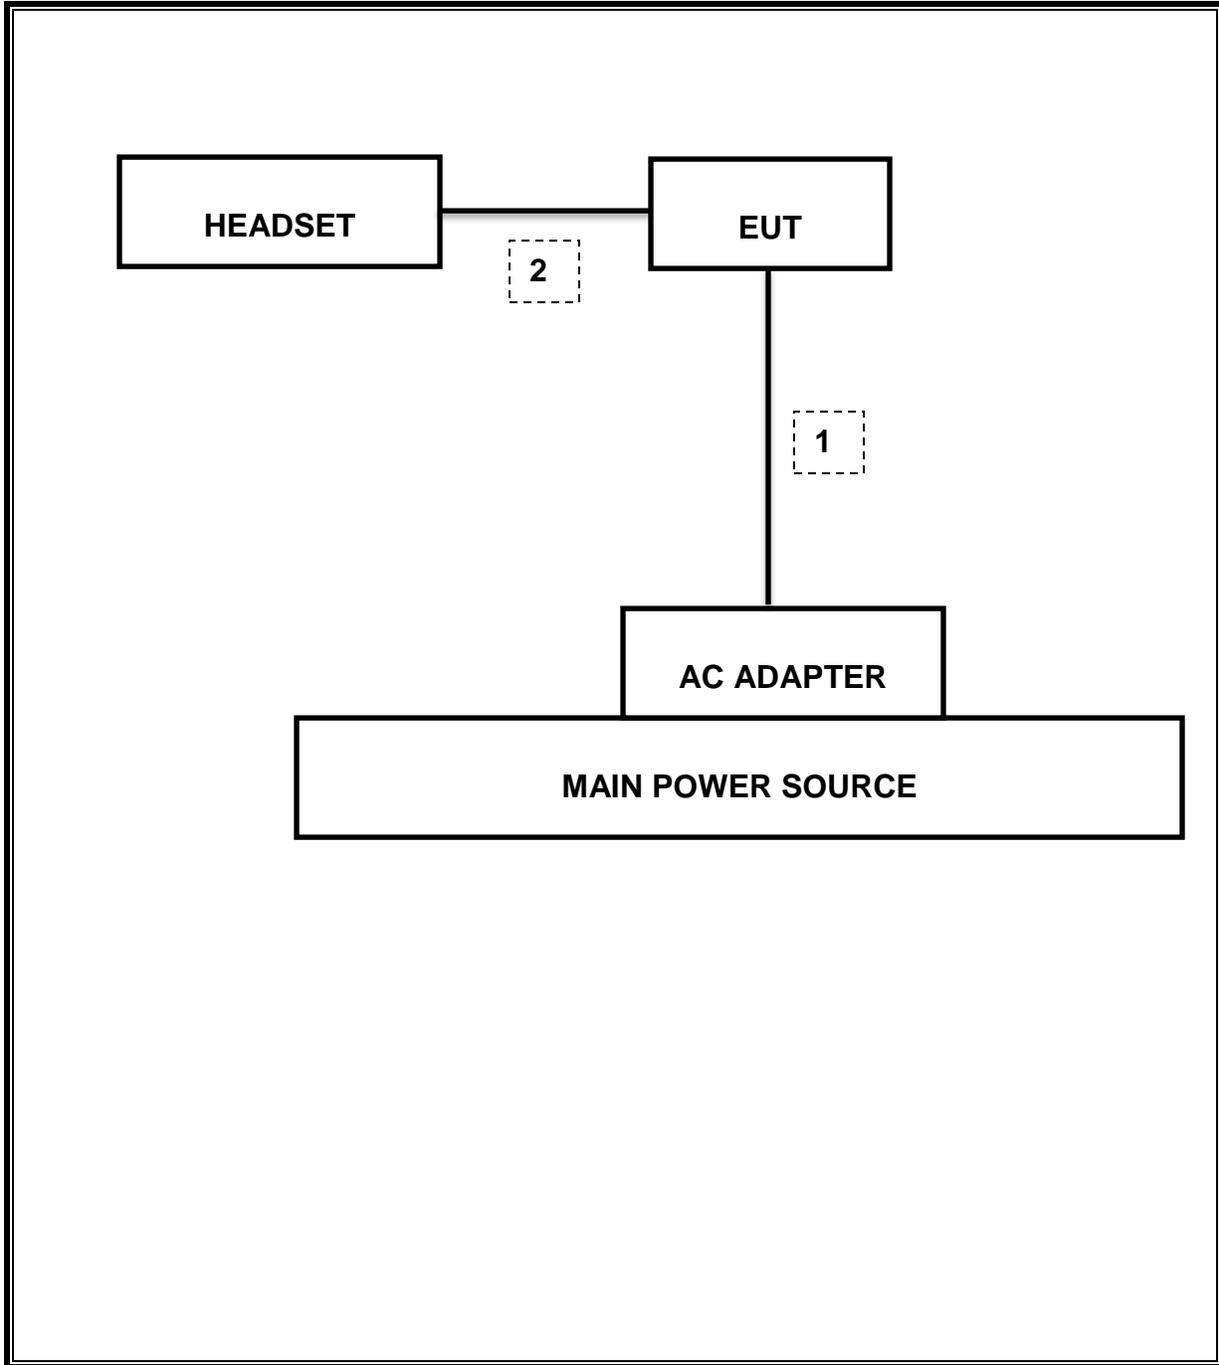

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

UL – Melville Equipment

Radiated Emissions					
Description	Manufacturer	Model	Identifier	Cal Date	Cal Due Date
30-1000MHz					
EMI Receiver	Rohde & Schwarz	ESCI7	75141	2014-01-29	2015-01-31
Hybrid Antenna	Sunol	JB-1	84106	2014-02-19	2015-02-19
Switch Driver	HP	11713A	ME7A-627	N/A	N/A
System Controller	Sunol Sciences	SC99V	44396	N/A	N/A
Camera Controller	Panasonic	WV-CU254	44395	N/A	N/A
RF Switch Box	UL	1	44398	N/A	N/A
Measurement Software	UL	Version 9.5	44740	N/A	N/A
Multimeter	Fluke	87V	44547	2014-01-29	2015-01-31
Above 1GHz (Band Optimized System)					
Spectrum Analyzer	Agilent	E4446A	72823	2014-06-12	2015-06-12
Horn Antenna (2-4 GHz)	ETS	3161-02 (22°)**	48107	2007-09-27	See * below
Horn Antenna (4-8 GHz)	ETS	3161-03 (22°)**	48106	2007-09-27	See * below
Horn Antenna (8-12 GHz)	ETS	3160-07 (26°)**	8933	2008-11-24	See * below
Horn Antenna (12-18 GHz)	ETS	3160-08 (26°)**	8932	2007-09-27	See * below
Horn Antenna (18-26.5 GHz)	ETS	3160-09 (27°)**	8947	2007-09-26	See * below
Horn Antenna	EMCO	3115	ME5A-766		
Signal Path Controller	HP	11713A	50250	N/A	N/A
Gain Controller	HP	11713A	50251	N/A	N/A
RF Switch / Preamp Fixture	UL	BOMS1	50249	N/A	N/A
System Controller	UL	BOMS2	50252	N/A	N/A
Measurement Software	UL	Version 9.5	44740	N/A	N/A
Temp/Humidity/Pressure Meter	Cole Parmer	99760-00	4268	2012-12-22	2014-12-22
Multimeter	Fluke	87V	44547	2014-01-29	2015-01-31
* - Note: As allowed by the calibration standard ANSI C63.4 Section 4.4.2, standard gain horns need only a one-time calibration. Only if physical damage occurs will the horn antenna require re-calibration. Gain standard horn antennas (sometimes called standard gain horn antennas) need not be calibrated beyond that which is provided by the manufacturer unless they are damaged or deterioration is suspected, or they are used at a distance closer than $2D^2/\lambda$. Gain standard horn antennas have gains that are fixed by their dimensions and dimensional tolerances. ** - Number in parentheses denotes antenna beam width.					

UL – Fremont Equipment

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
Spectrum Analyzer,9KHz-40GHz	HP	8564E	C00986	04/01/15
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	1000741	08/13/14
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/18/14
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
Antenna, Horn, 1-18 GHz	ETS	3117	C01022	02/21/15
Antenna, Horn,18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/14
Antenna, Horn, 26-40 GHz	ARA	MWH-2640	C00891	06/28/15
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	T243	03/06/15
RF Preamplifier, 100KHz -> 1300MHz	HP	TBD	C00825	06/01/15
RF Preamplifier, 1GHz - 18GHz	Miteq	NSP4000-SP2	924343	03/23/15
RF Preamplifier, 1GHz - 26.5GHz	HP	8449B	F00351	06/27/15
AC Power Supply, 2,500VA 45-500Hz	Elgar-Ametek	CW2501M	F00013	CNR
RF Preamplifier, 1GHz - 40GHz	Miteq	NSP4000-SP2	C00990	08/20/14
Attenuator / Switch driver	HP	11713A	F00204	CNR
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	F00219	05/23/15
High Pass Filter 5GHz	Micro-Tronics	HPS17542	F00222	05/22/15
High Pass Filter 6GHz	Micro-Tronics	HPM17543	F00224	05/22/15

7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r02: Measurement Procedure AVGPM-G is used for power and AVGPS3 is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.

8. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-210 A8.2(a)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	8.59MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-30dBc		Pass	-36.36dBm
15.247	RSS-210 A8.4	TX conducted output power	<30dBm		Pass	15.2dBm
15.247	RSS-210 A8.2	PSD	<8dBm		Pass	-15.3dBm
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10		Pass	40.2dBuV
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass	No emissions detected above system noise floor

9. ANTENNA PORT TEST RESULTS

9.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v03r02: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

RESULTS

9.1.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	8.59	0.5
Mid	2437	8.61	0.5
High	2462	8.59	0.5
Worst		8.59	



9.1.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	16.40	0.5
Mid	2437	16.50	0.5
High	2462	16.50	0.5
Worst		16.40	


9.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	17.70	0.5
Mid	2437	17.75	0.5
High	2462	17.70	0.5
Worst		17.70	



802.11b 6 dB BANDWIDTH

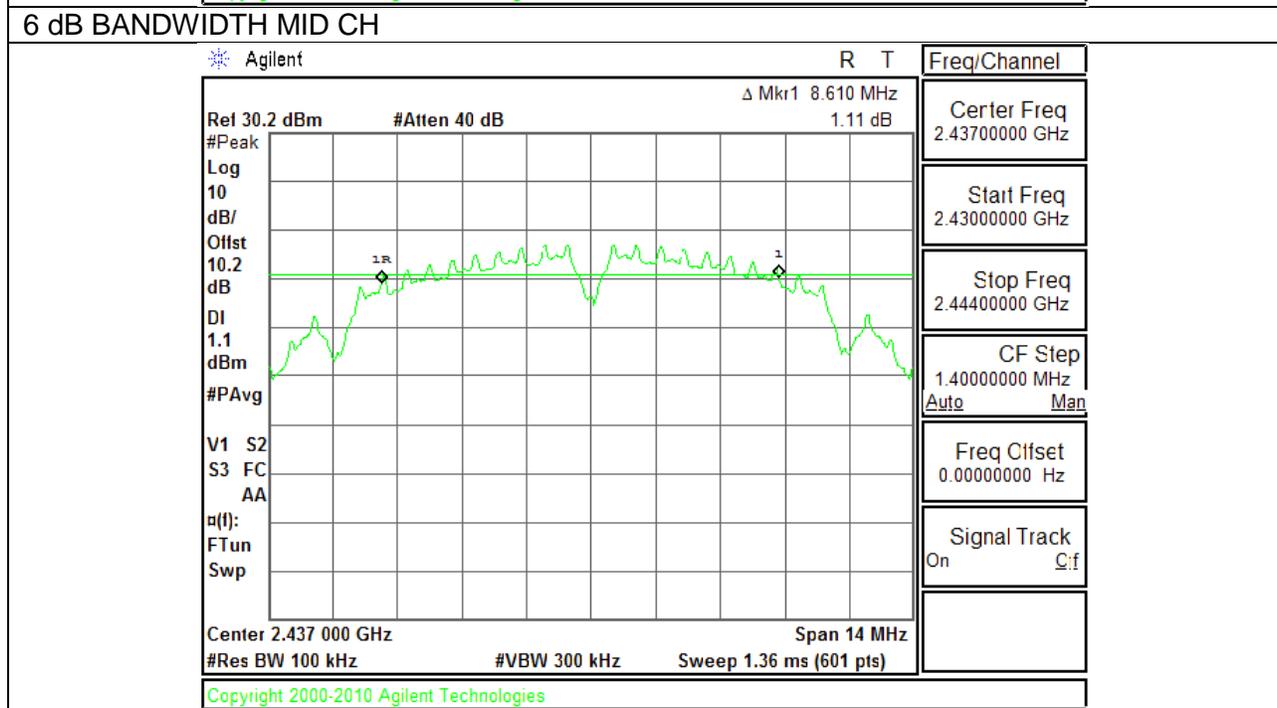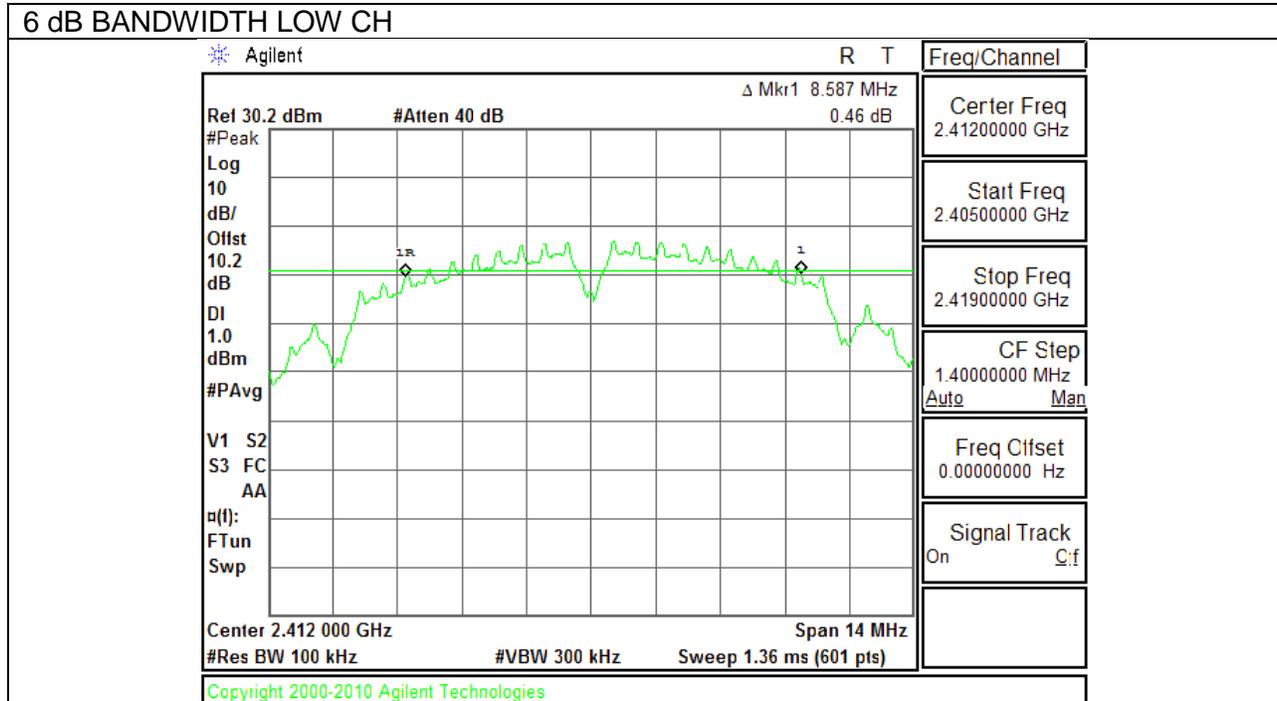


802.11b 6 dB BANDWIDTH

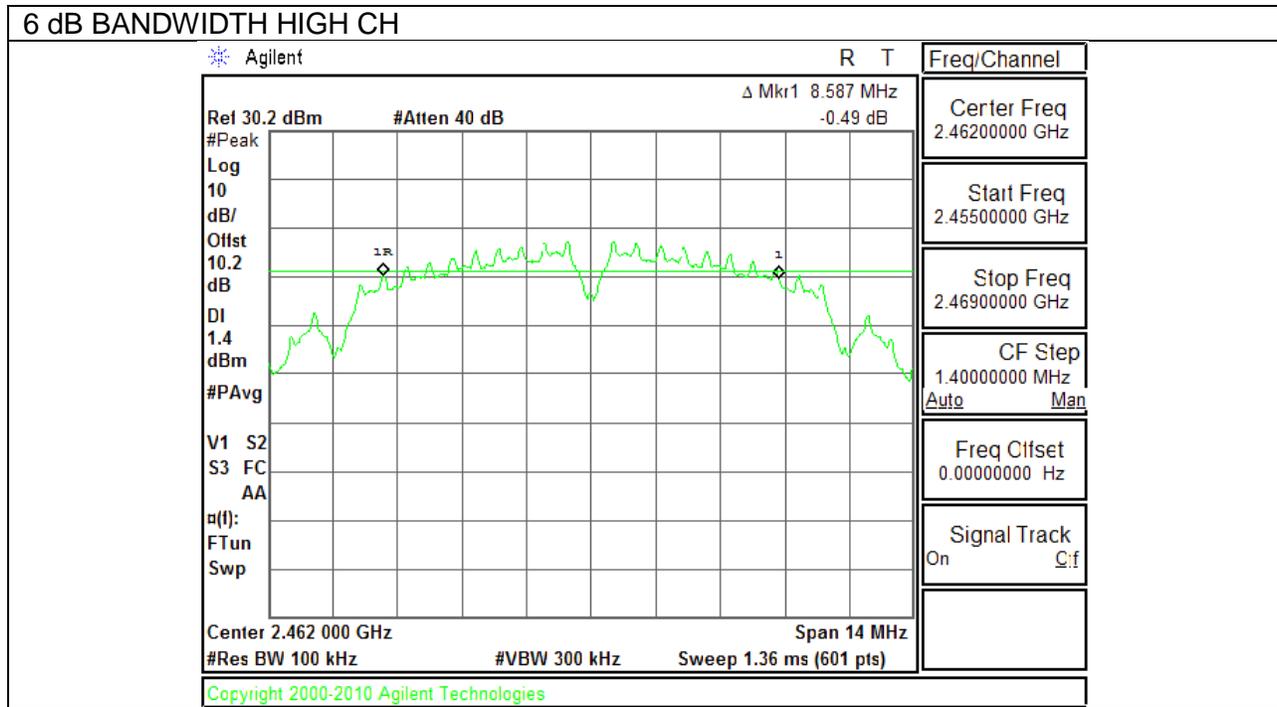



802.11g 6 dB BANDWIDTH

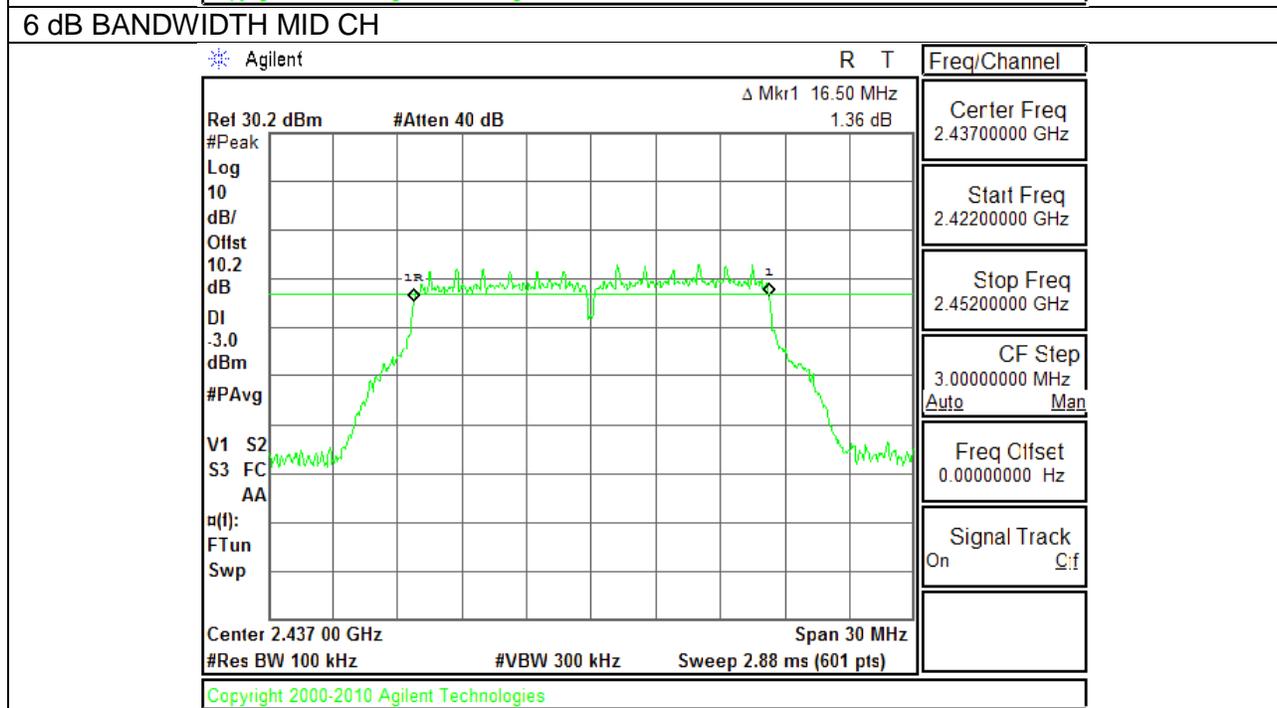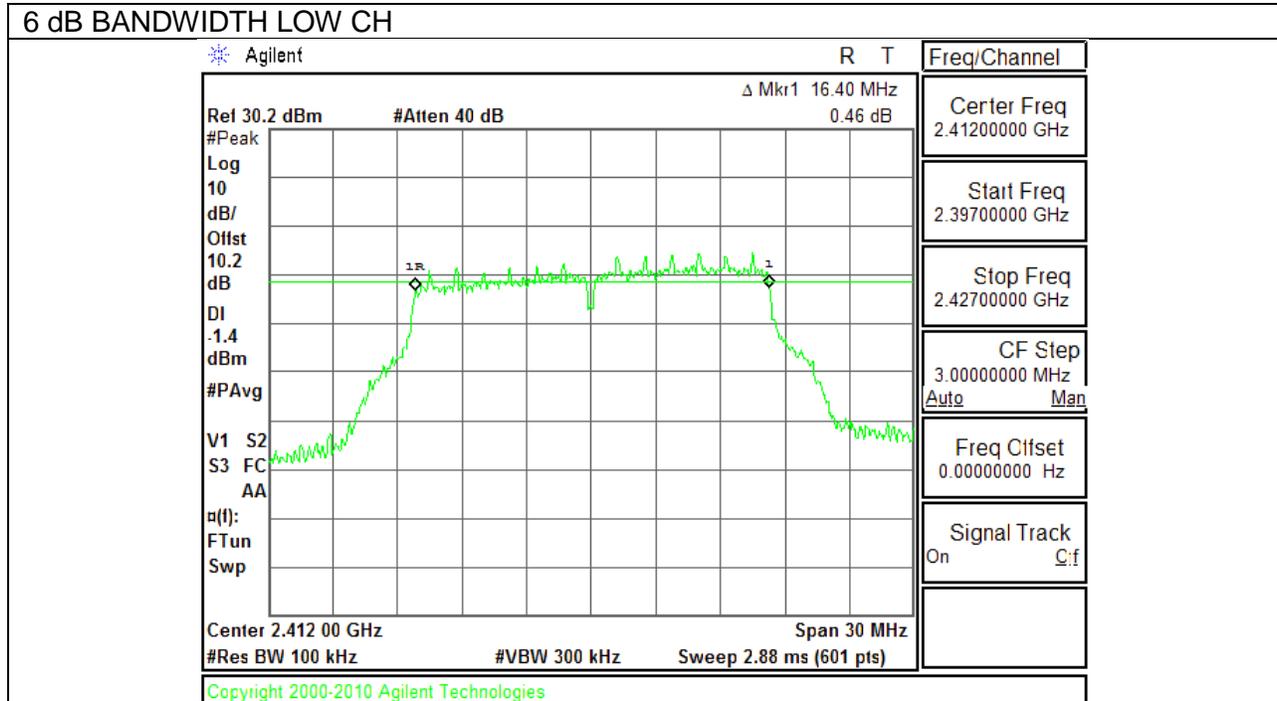


802.11g 6 dB BANDWIDTH

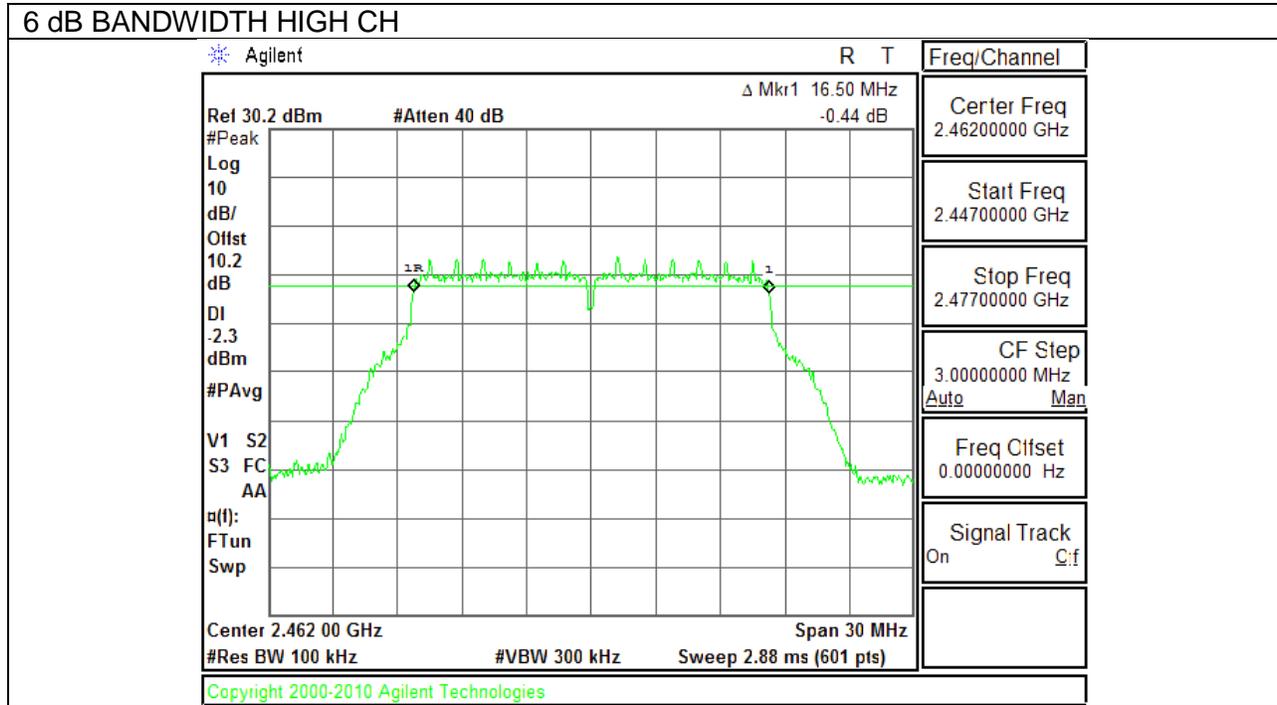

802.11n 6 dB BANDWIDTH

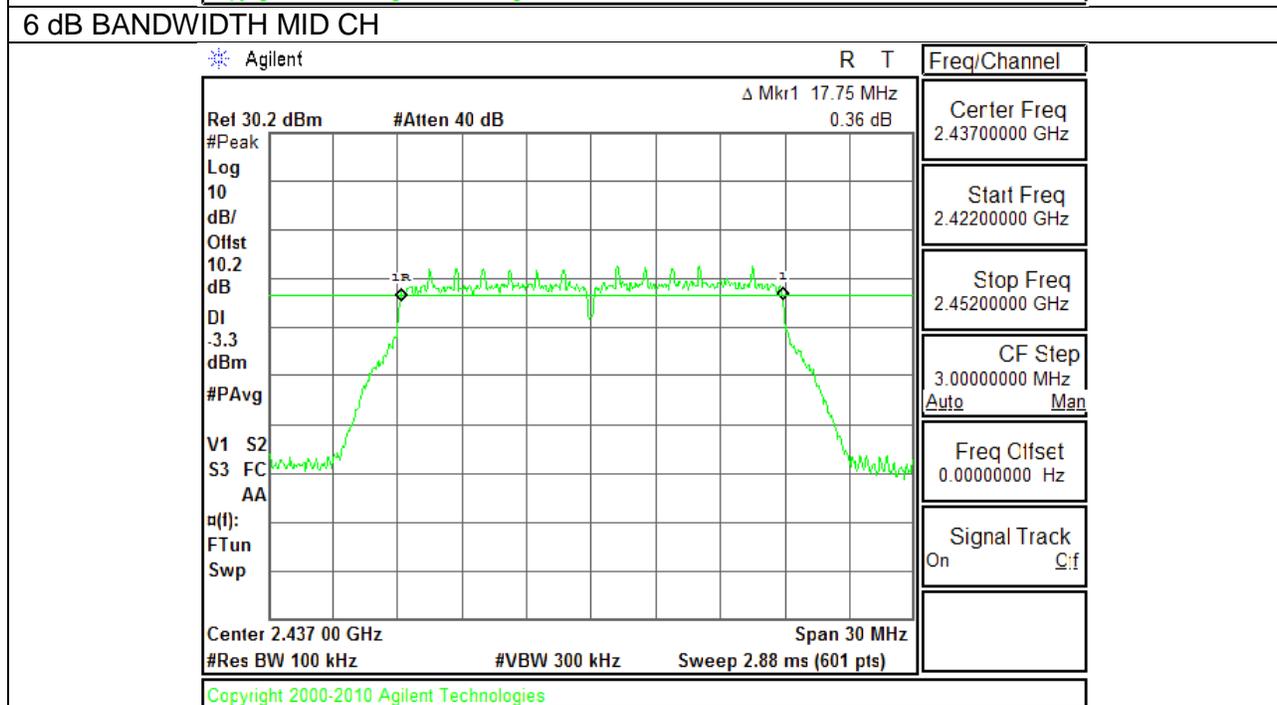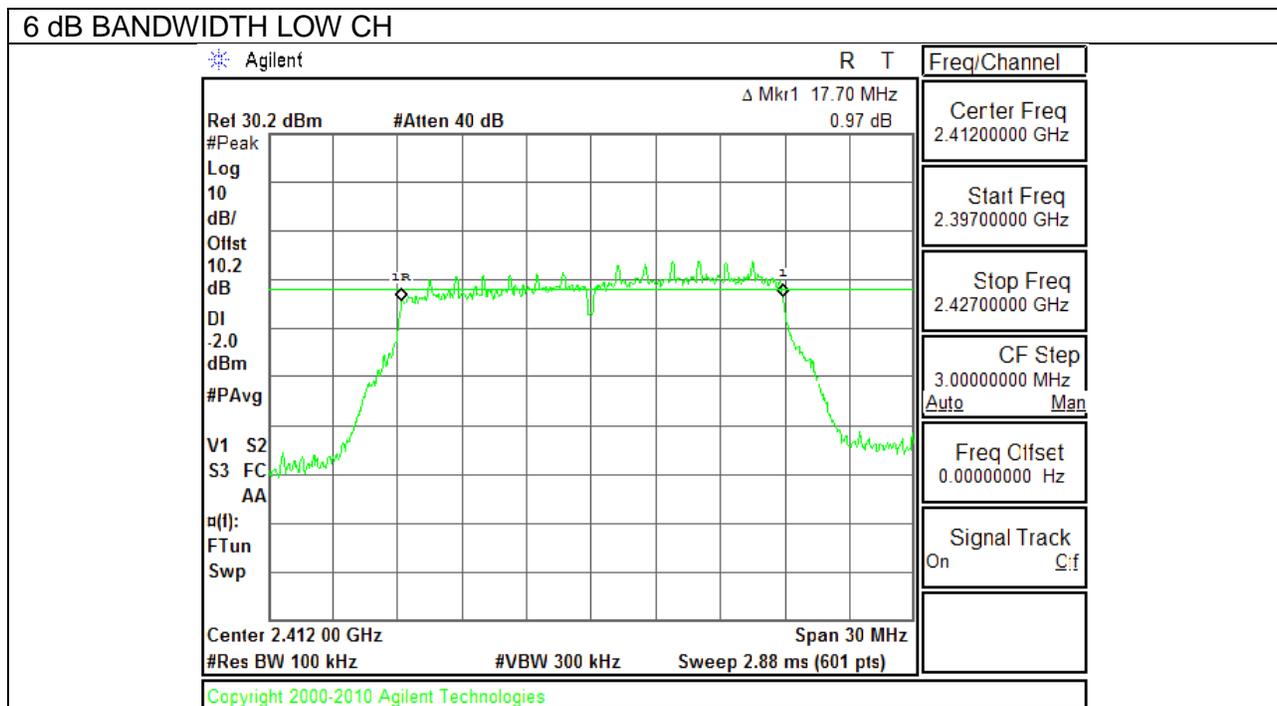

802.11n 6 dB BANDWIDTH

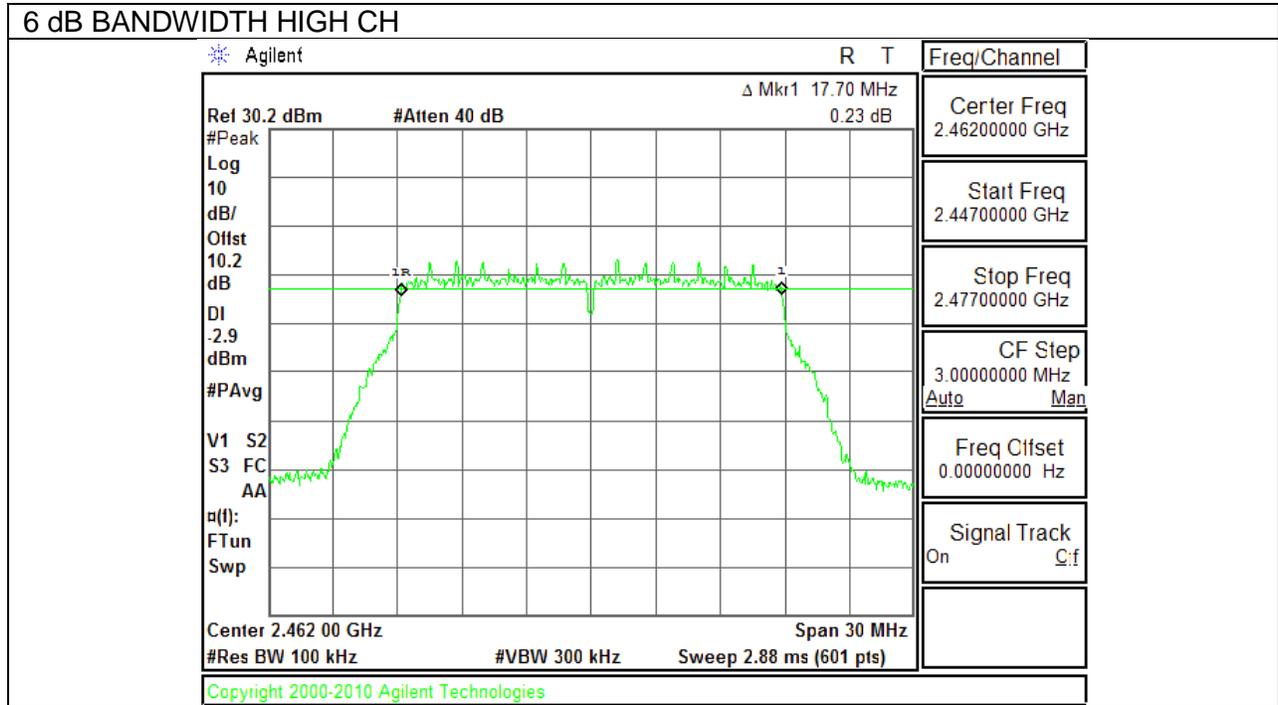

9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

9.2.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	10.63
Mid	2437	10.29
High	2462	10.42
Worst		10.63



9.2.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.54
Mid	2437	16.53
High	2462	16.51
Worst		16.54


9.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.69
Mid	2437	17.74
High	2462	17.70
Worst		17.74


802.11b 99% BANDWIDTH

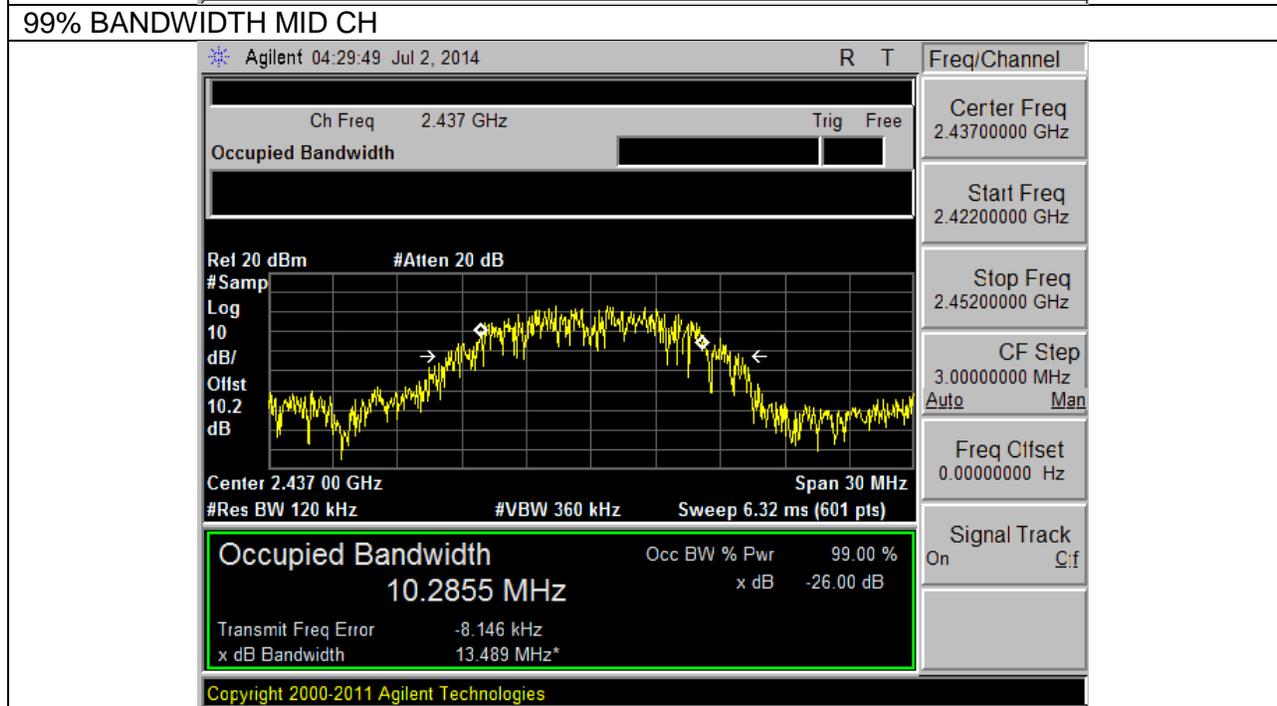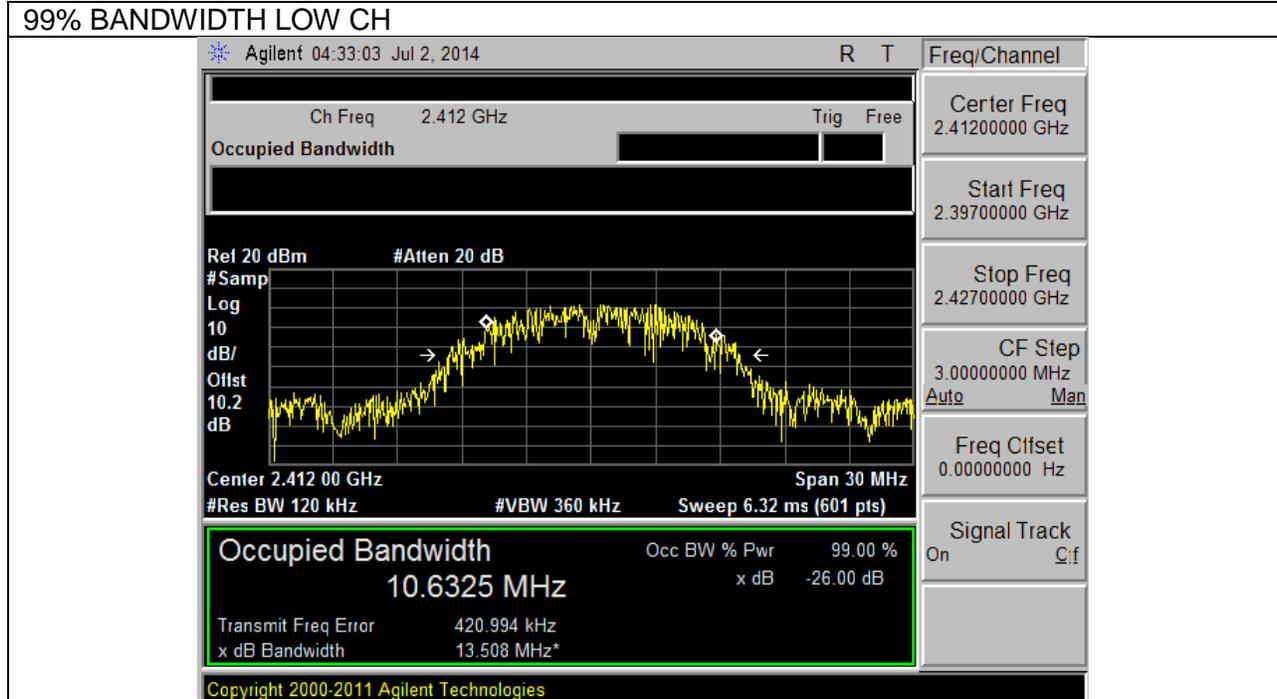


802.11b 99% BANDWIDTH

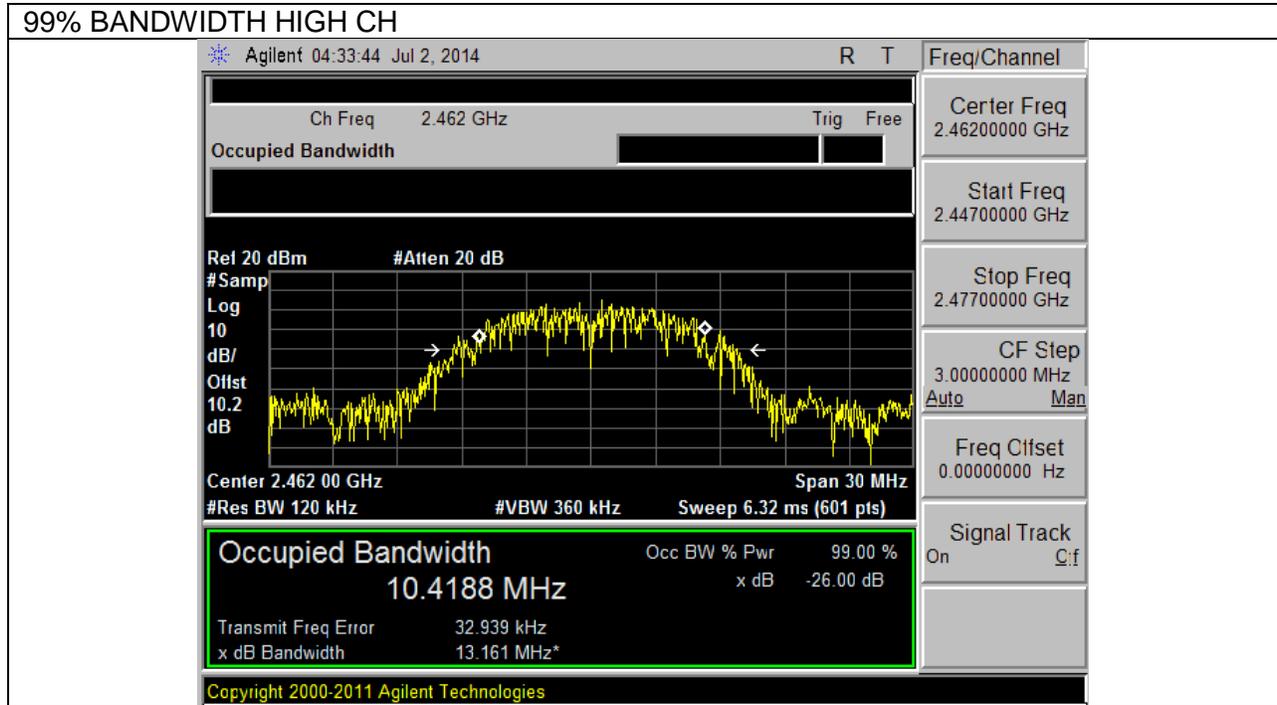



802.11g 99% BANDWIDTH

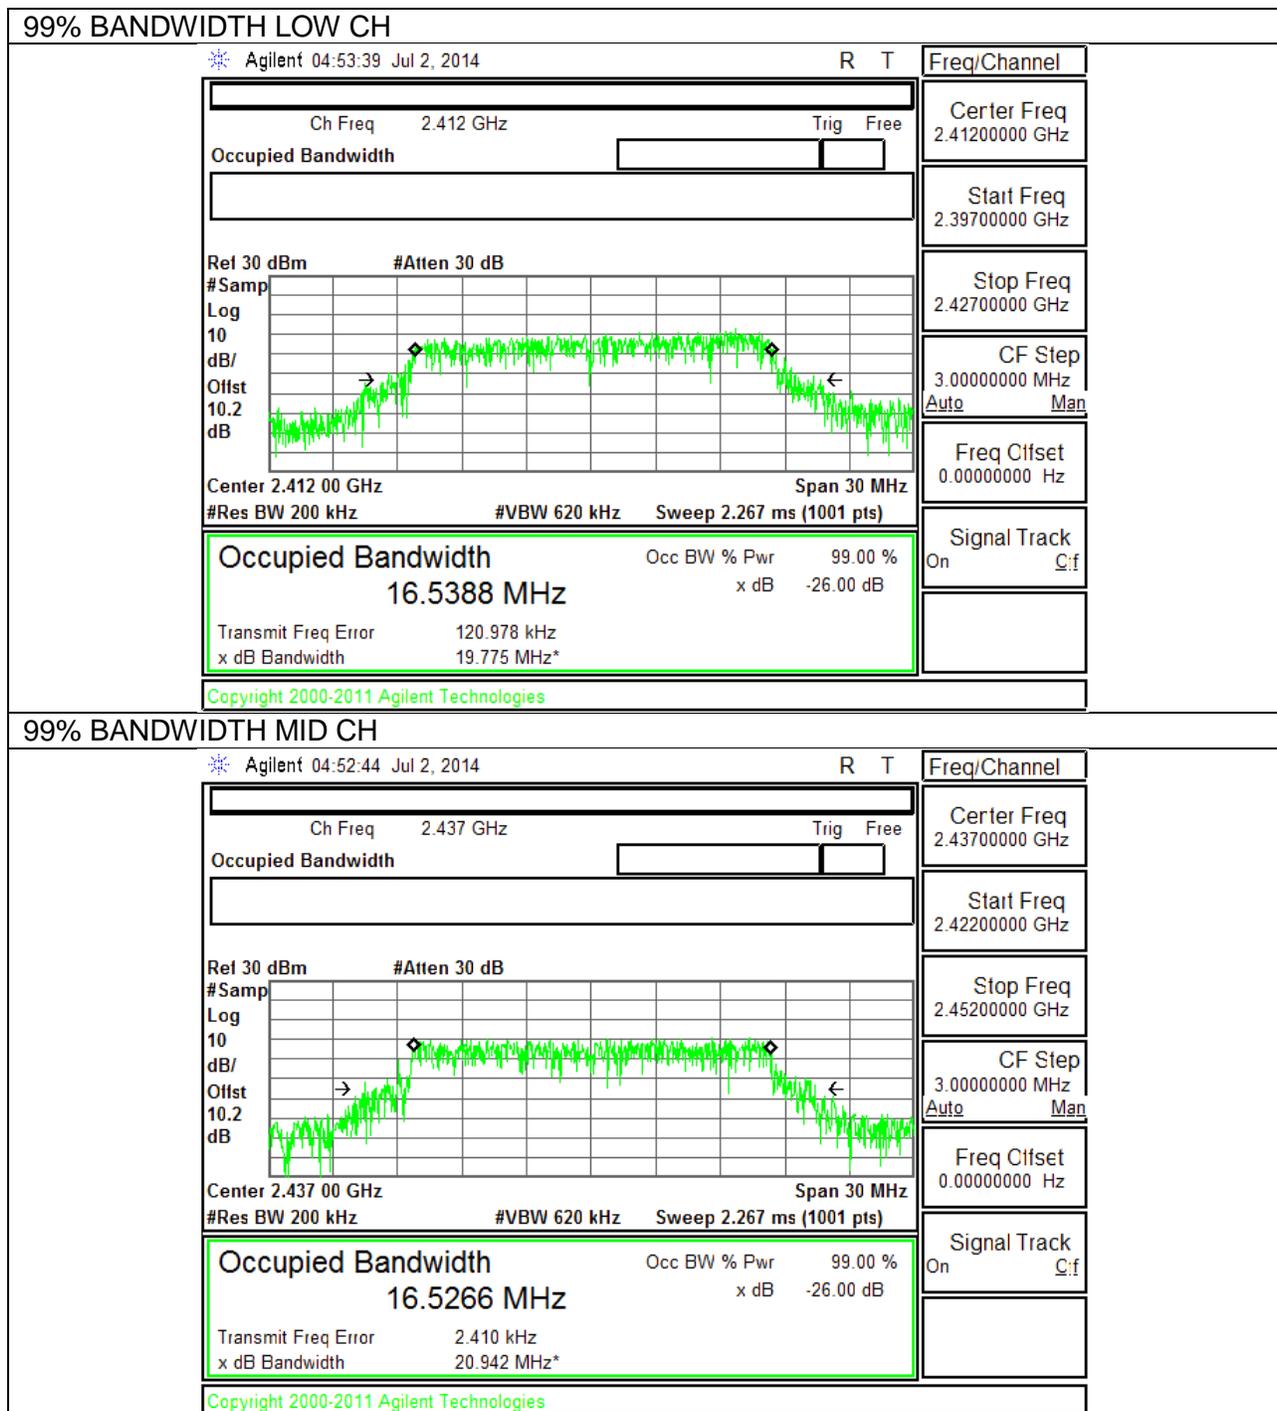


802.11g 99% BANDWIDTH

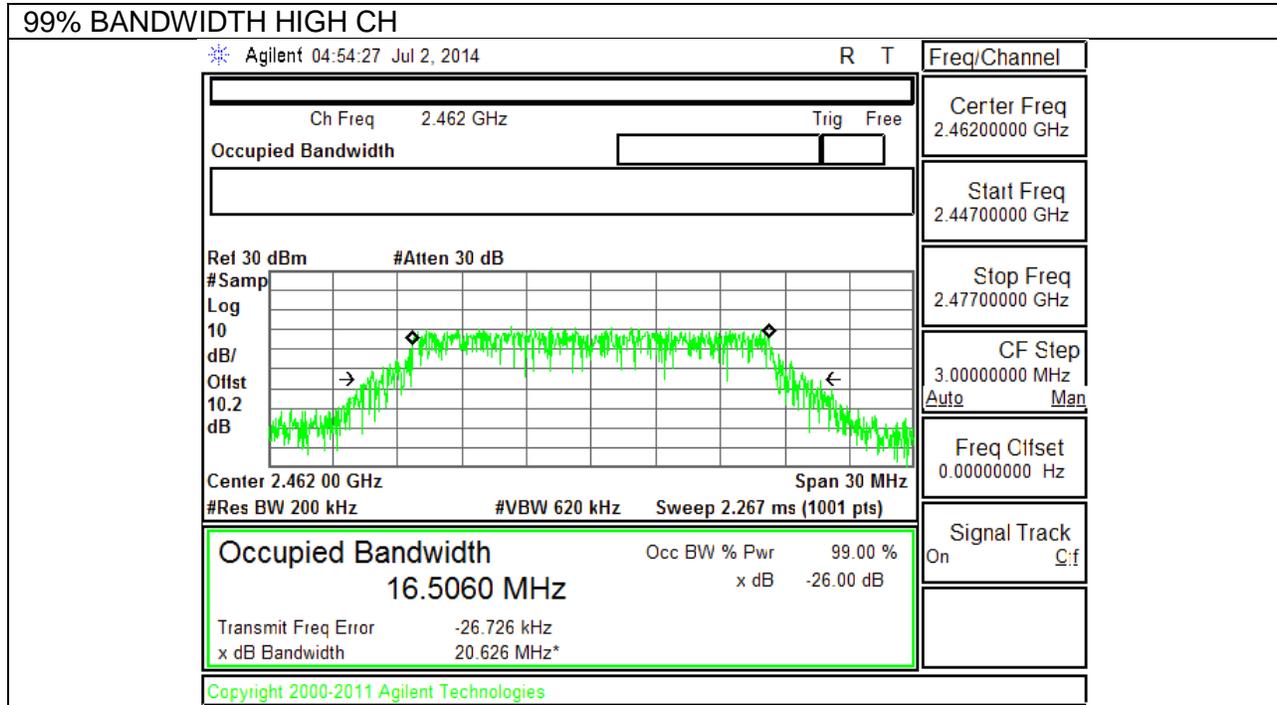

802.11n 99% BANDWIDTH

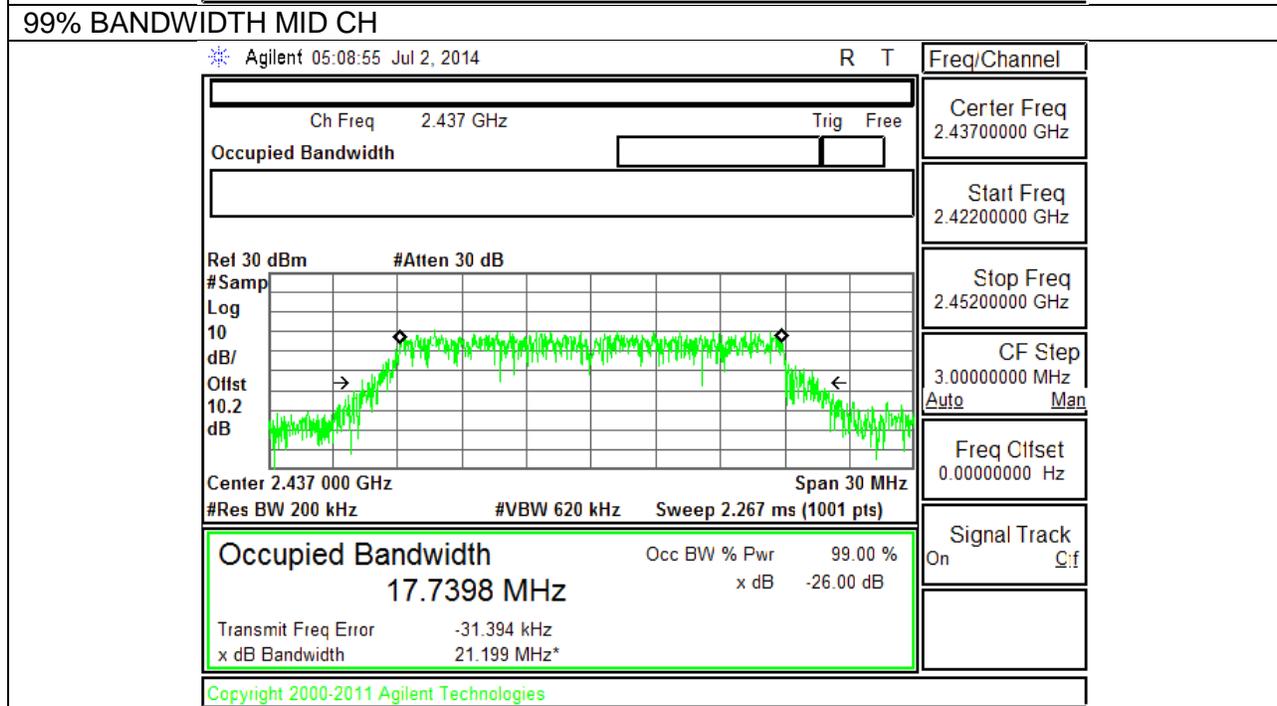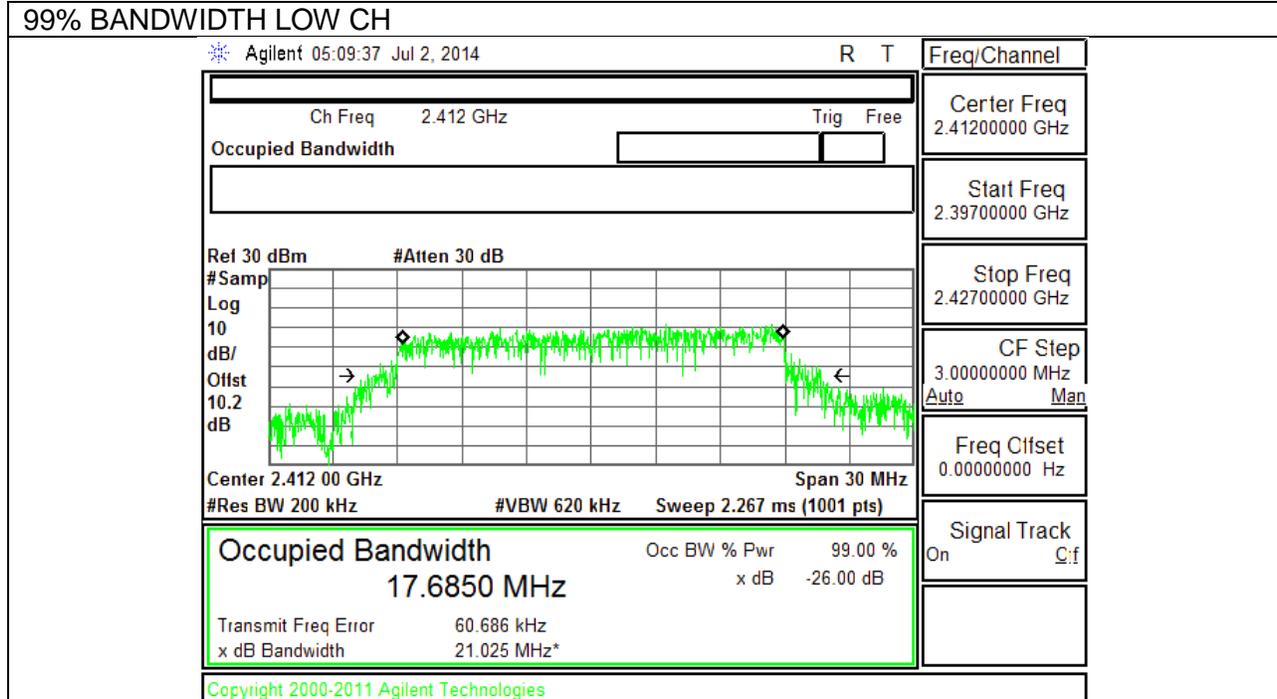

802.11n 99% BANDWIDTH

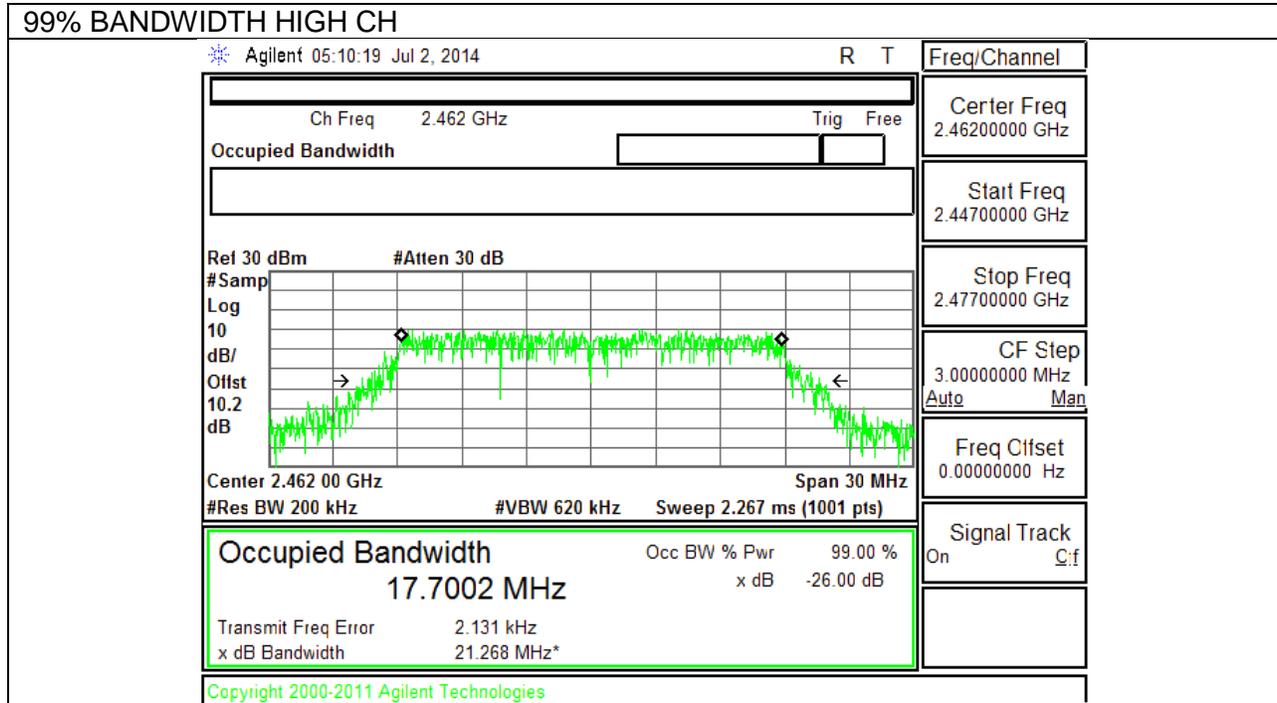

9.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

9.3.1. 802.11b MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	0.14	30.00	30	36	30.00
Mid	2437	0.14	30.00	30	36	30.00
High	2462	0.14	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	15.2	15.20	30.00	-14.80
Mid	2437	15.2	15.20	30.00	-14.80
High	2462	14.8	14.80	30.00	-15.20
Worst			15.20		

9.3.2. 802.11g MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	0.14	30.00	30	36	30.00
Mid	2437	0.14	30.00	30	36	30.00
High	2462	0.14	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	14.70	14.70	30.00	-15.30
Mid	2437	14.70	14.70	30.00	-15.30
High	2462	14.30	14.30	30.00	-15.70
Worst			14.70		

9.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	0.14	30.00	30	36	30.00
Mid	2437	0.14	30.00	30	36	30.00
High	2462	0.14	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	14.00	14.00	30.00	-16.00
Mid	2437	13.90	13.90	30.00	-16.10
High	2462	13.90	13.90	30.00	-16.10
Worst			14.00		

9.4. PSD

LIMITS

FCC §15.247

IC RSS-210 A8.2

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

9.4.1. 802.11b MODE IN THE 2.4 GHz BAND

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-16.65	8.0	-24.7
Mid	2437	-15.97	8.0	-24.0
High	2462	-15.30	8.0	-23.3

9.4.2. 802.11g MODE IN THE 2.4 GHz BAND

PSD Results



Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-17.93	8.0	-25.9
Mid	2437	-19.05	8.0	-27.1
High	2462	-19.42	8.0	-27.4

9.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND


PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-18.70	8.0	-26.7
Mid	2437	-20.32	8.0	-28.3
High	2462	-20.25	8.0	-28.3



802.11b PSD, Chain 0

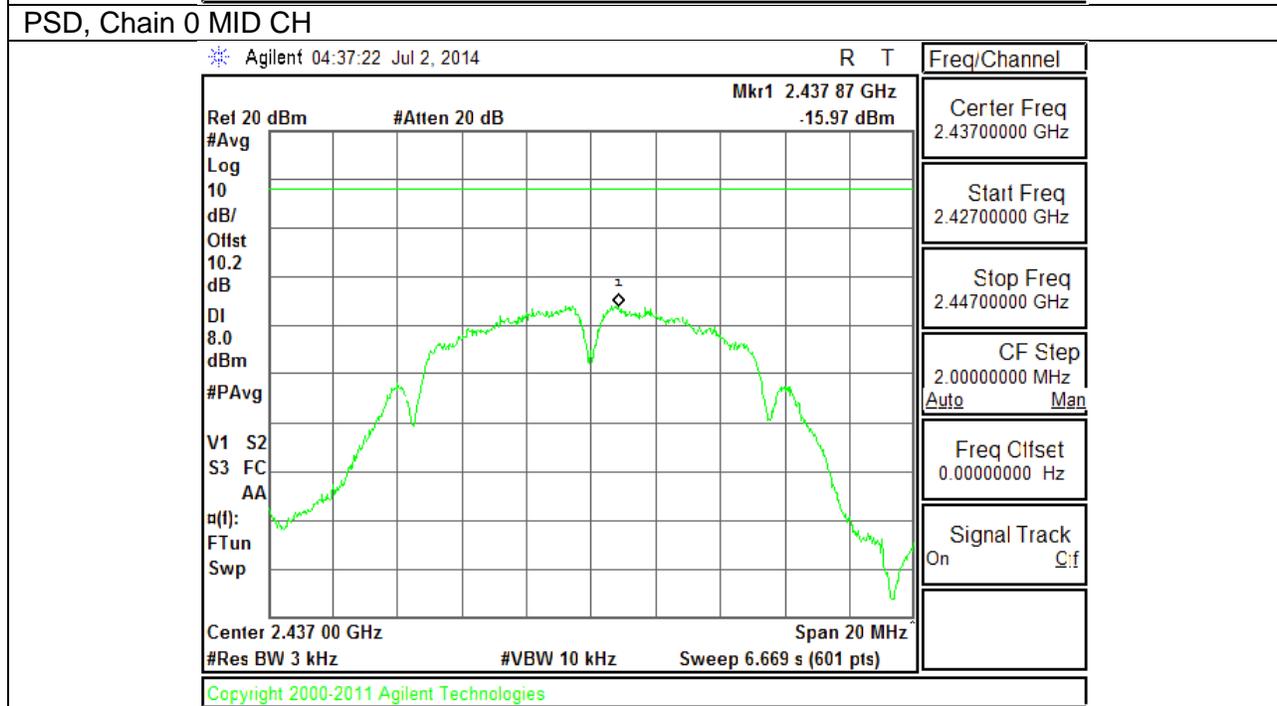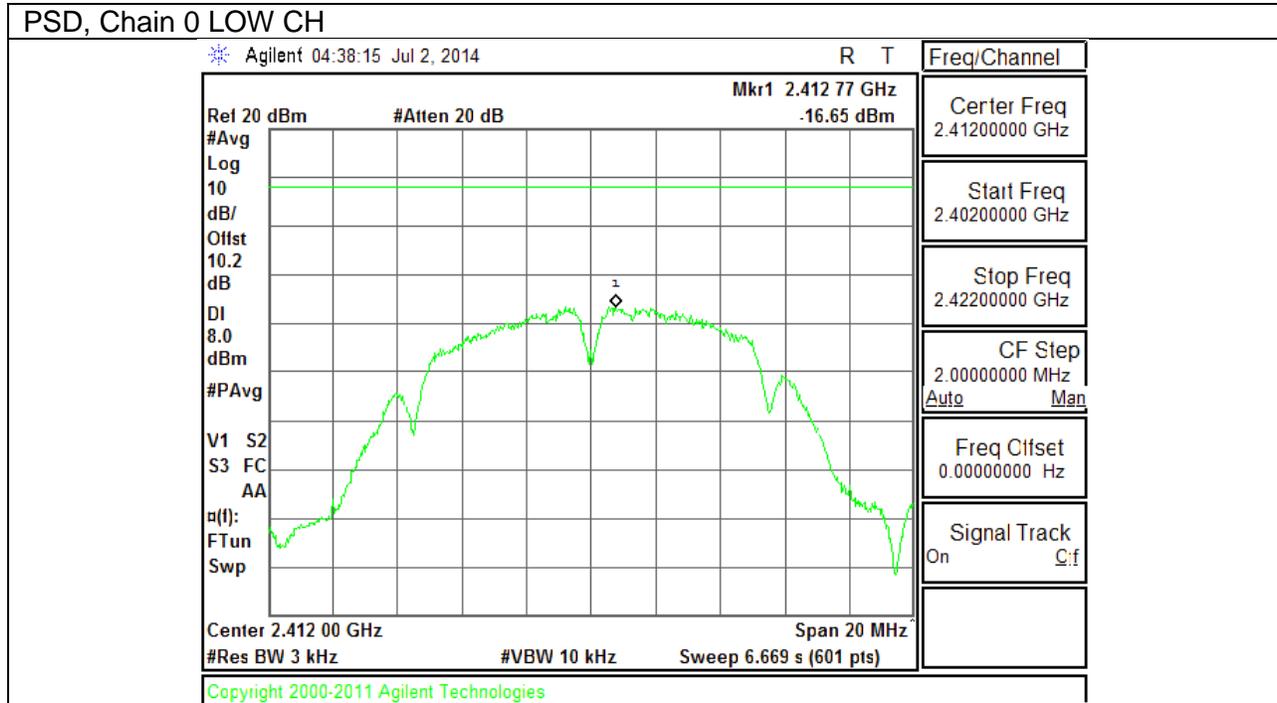


802.11b PSD, Chain 0

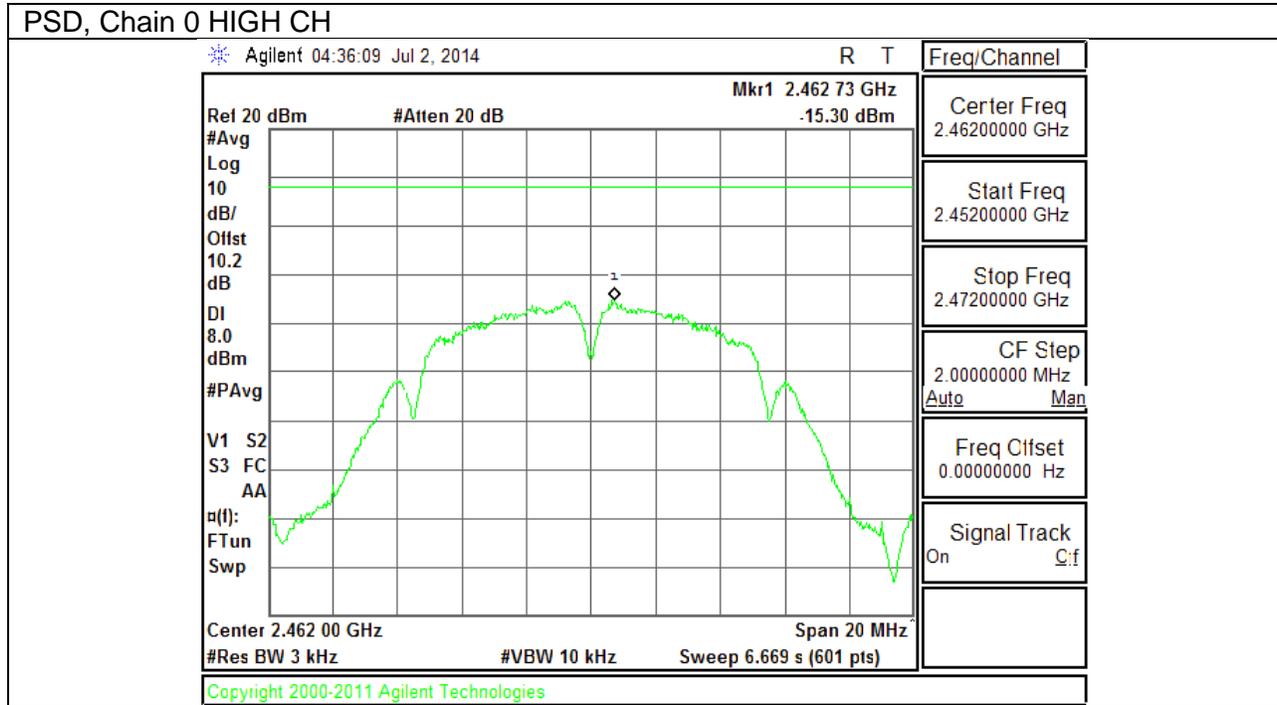



802.11g PSD, Chain 0

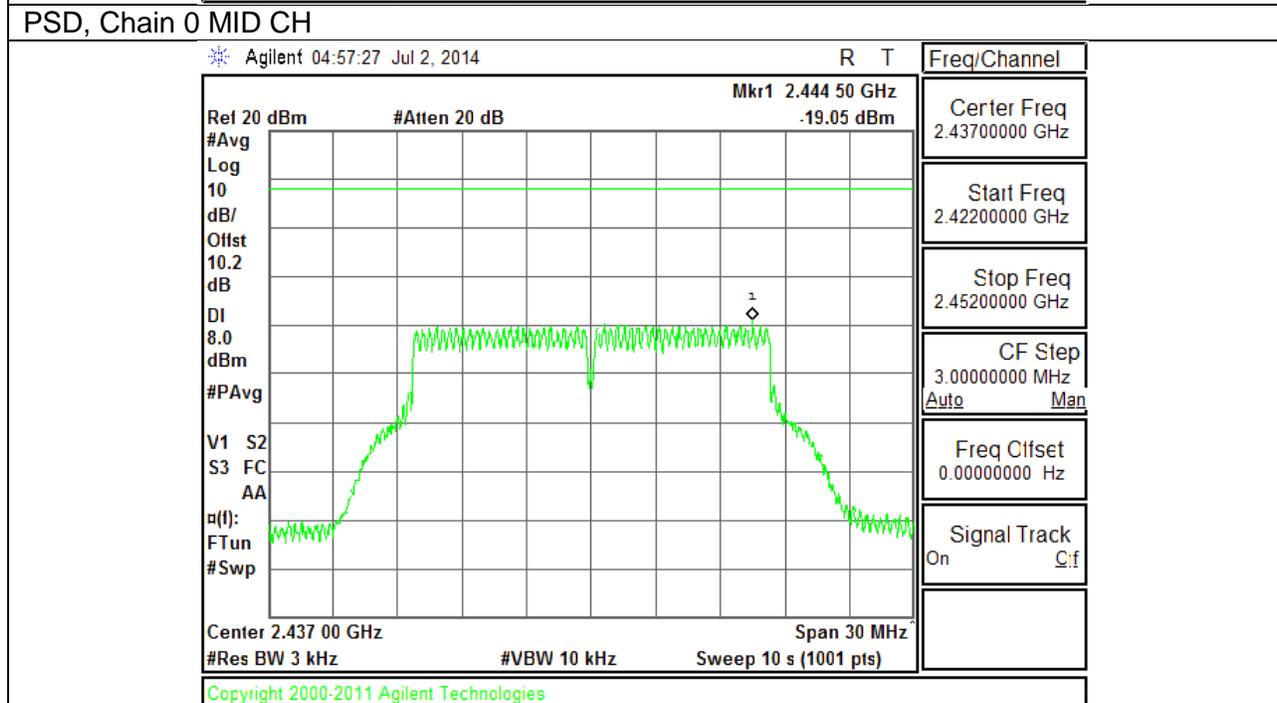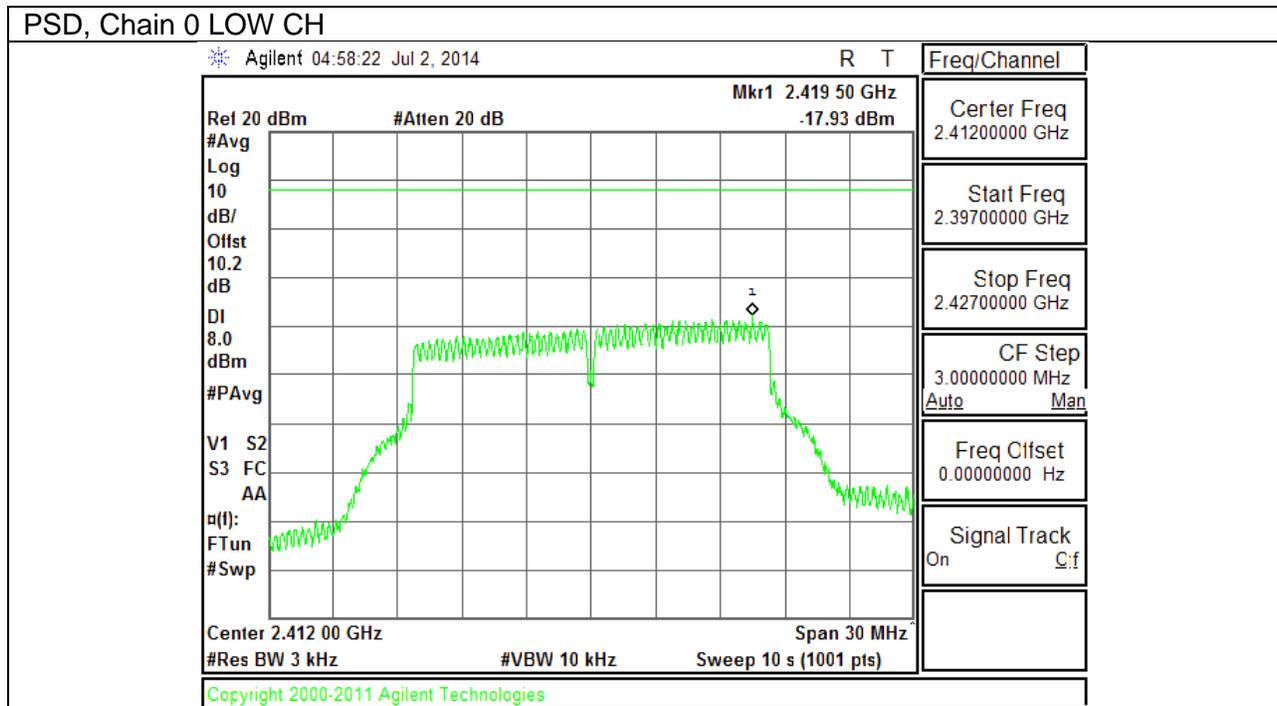


802.11g PSD, Chain 0

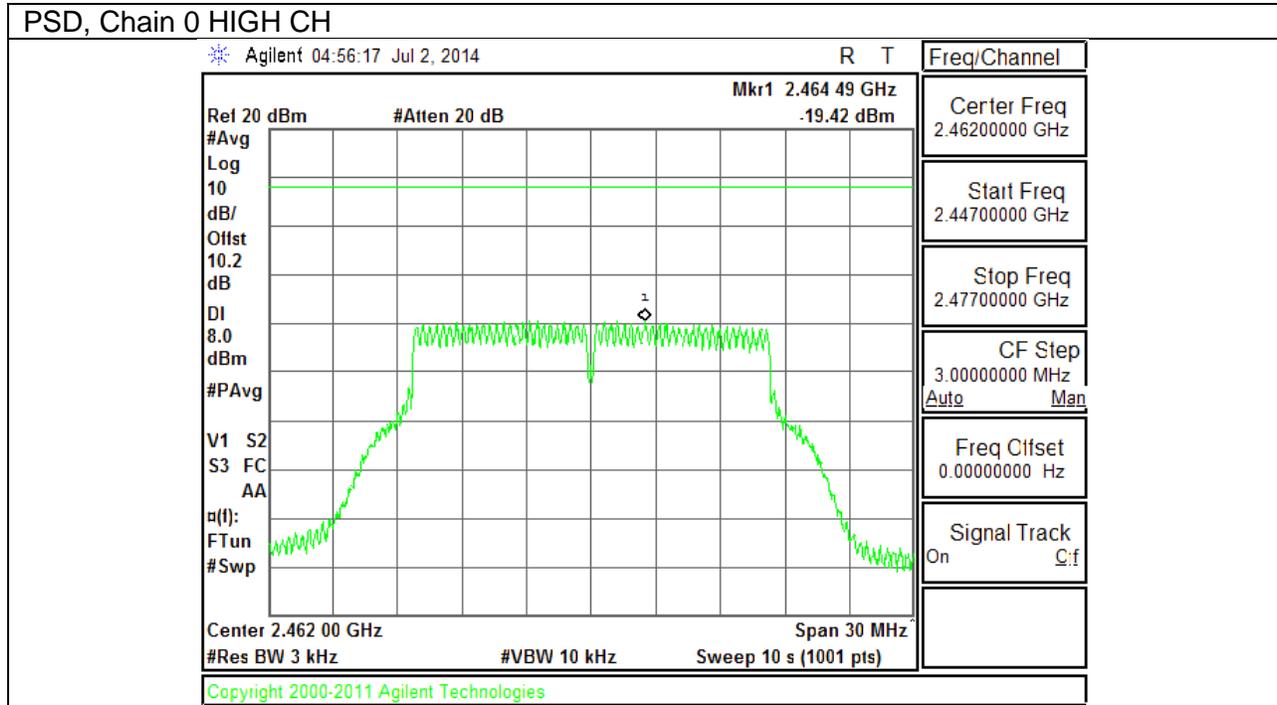

802.11n PSD, Chain 0

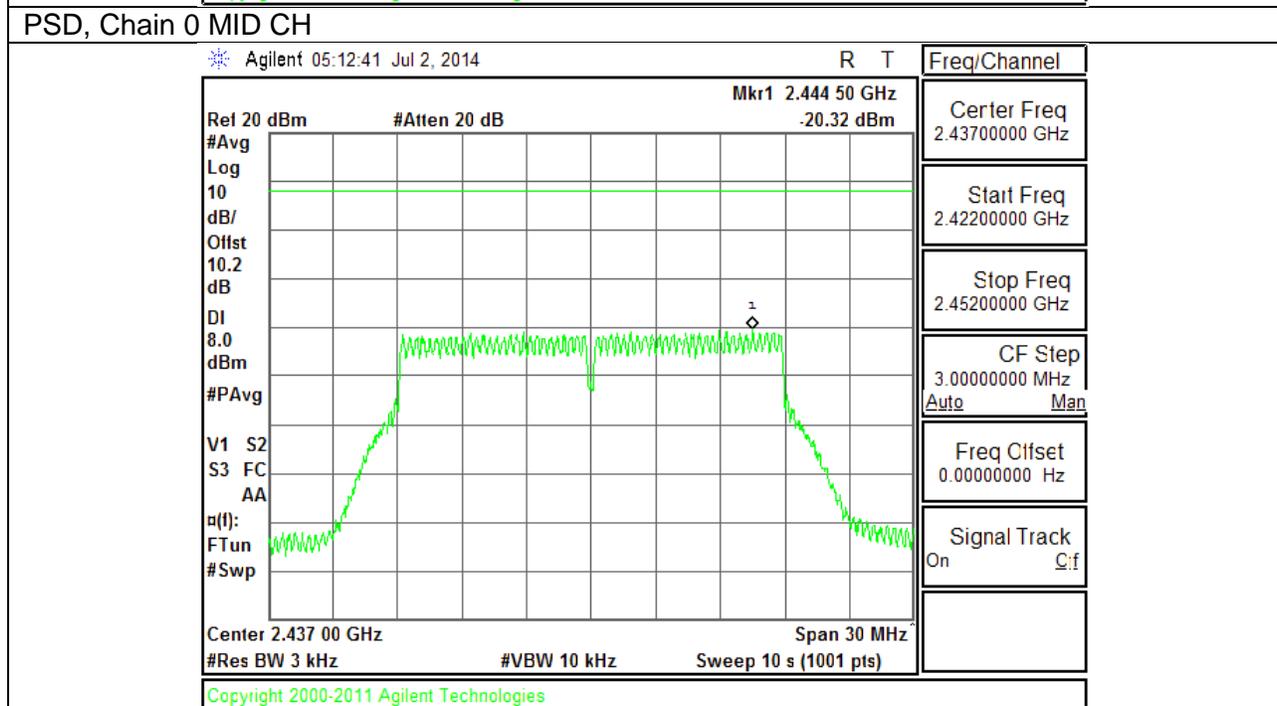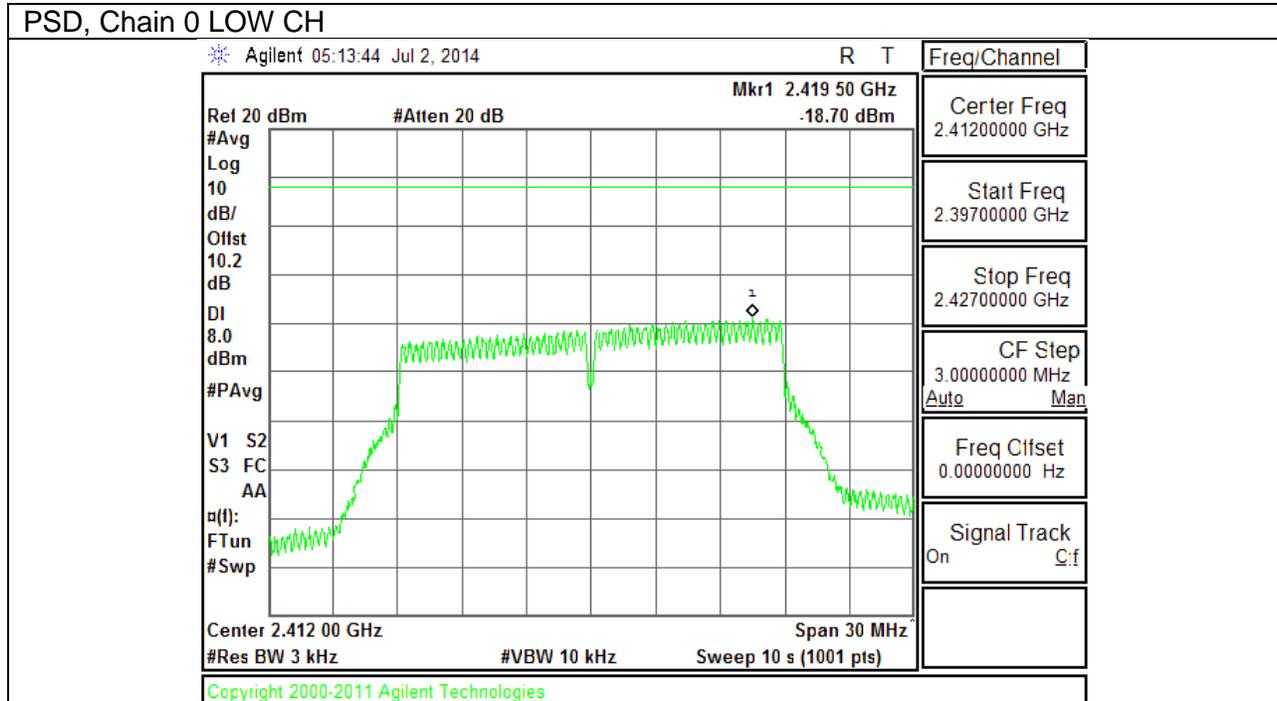

802.11n PSD, Chain 0

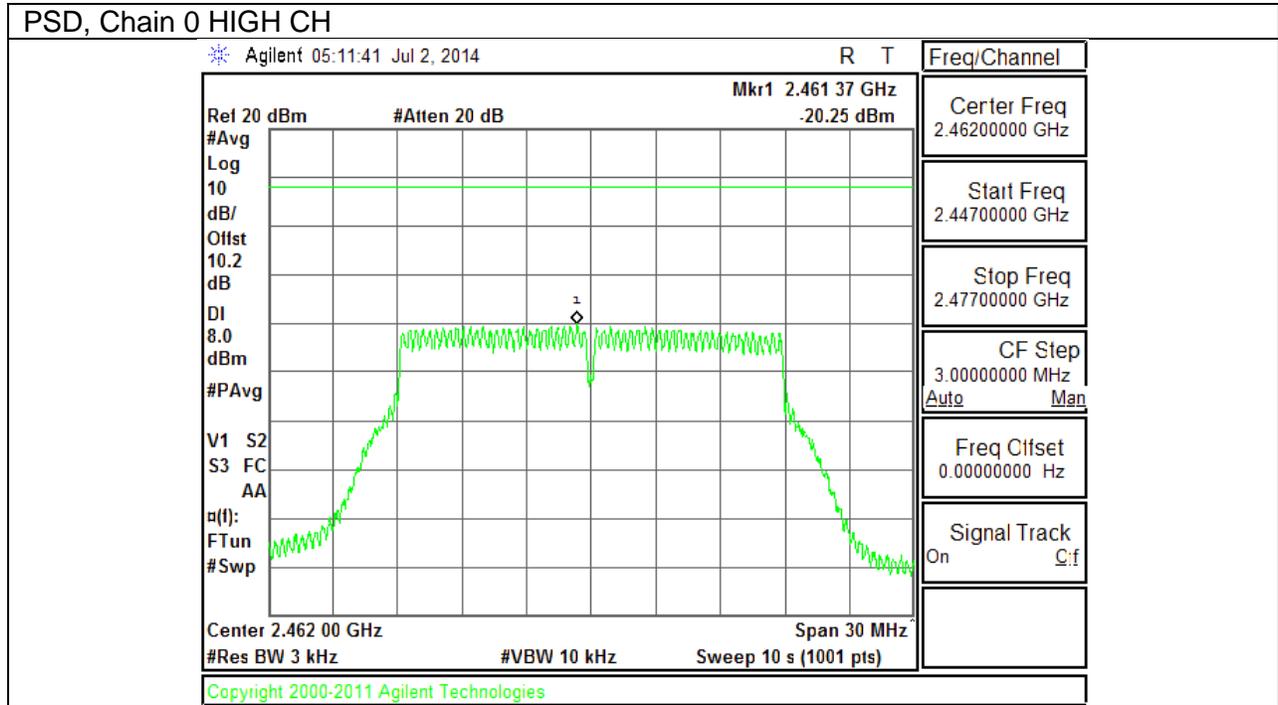

9.5. OUT-OF-BAND EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.


RESULTS

9.5.1. 802.11b MODE IN THE 2.4 GHz BAND


IN-BAND REFERENCE LEVEL

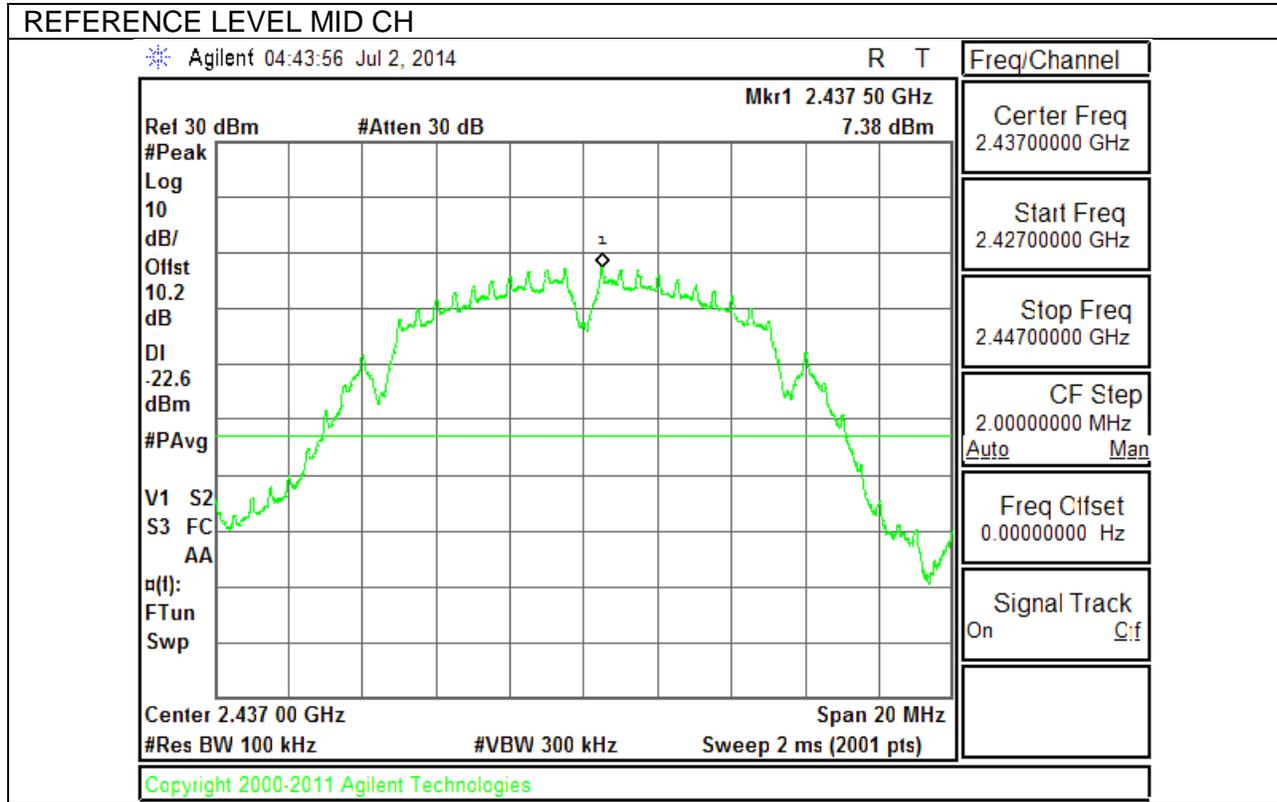



LOW CHANNEL BANDEDGE

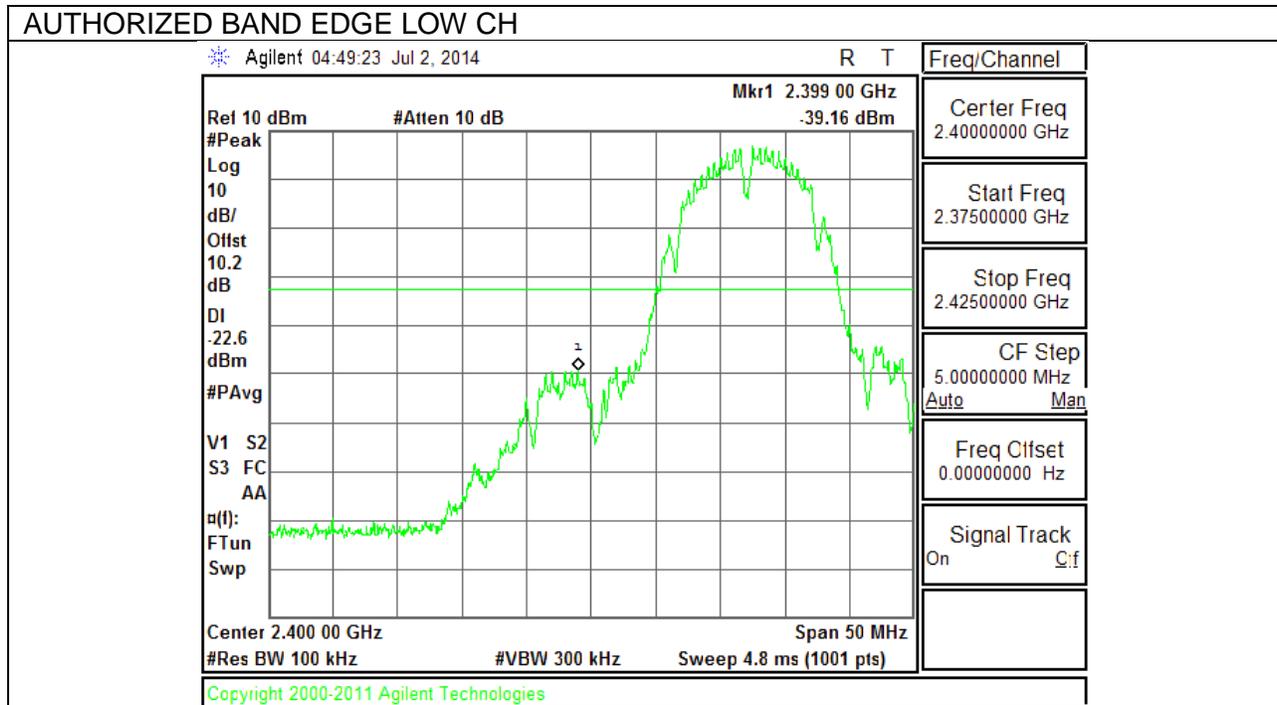


HIGH CHANNEL BANDEDGE

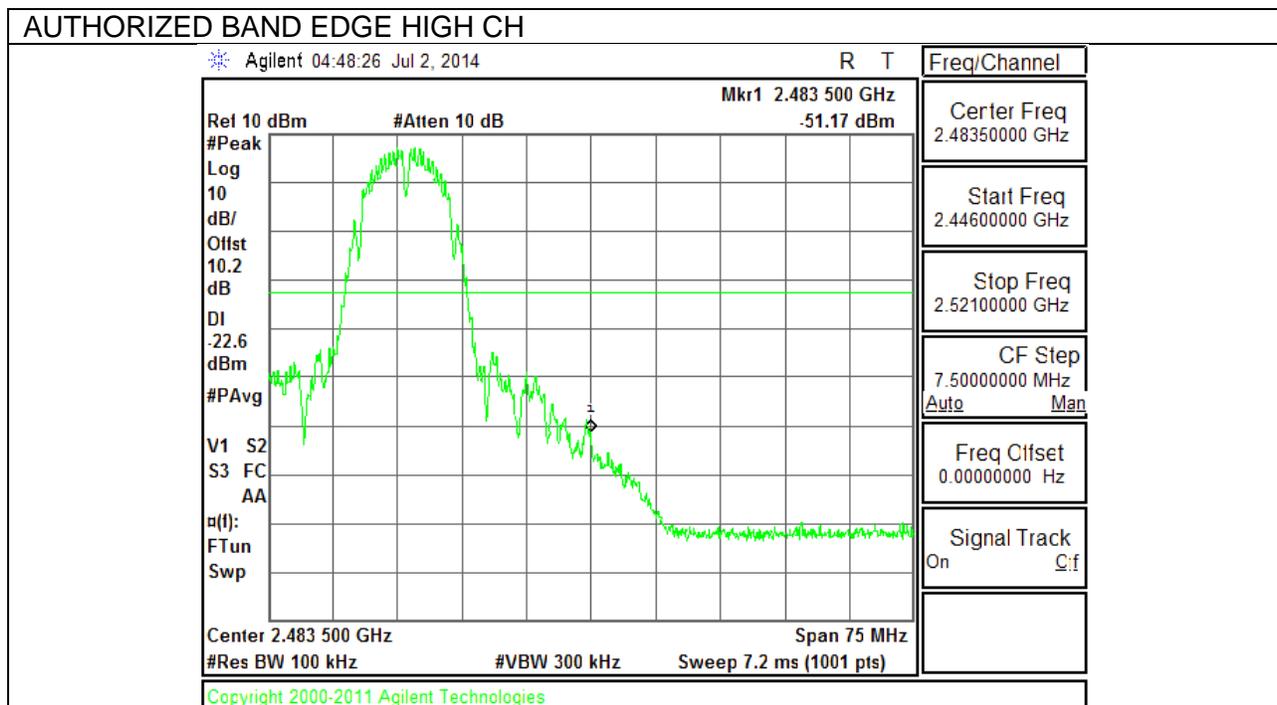

OUT-OF-BAND EMISSIONS

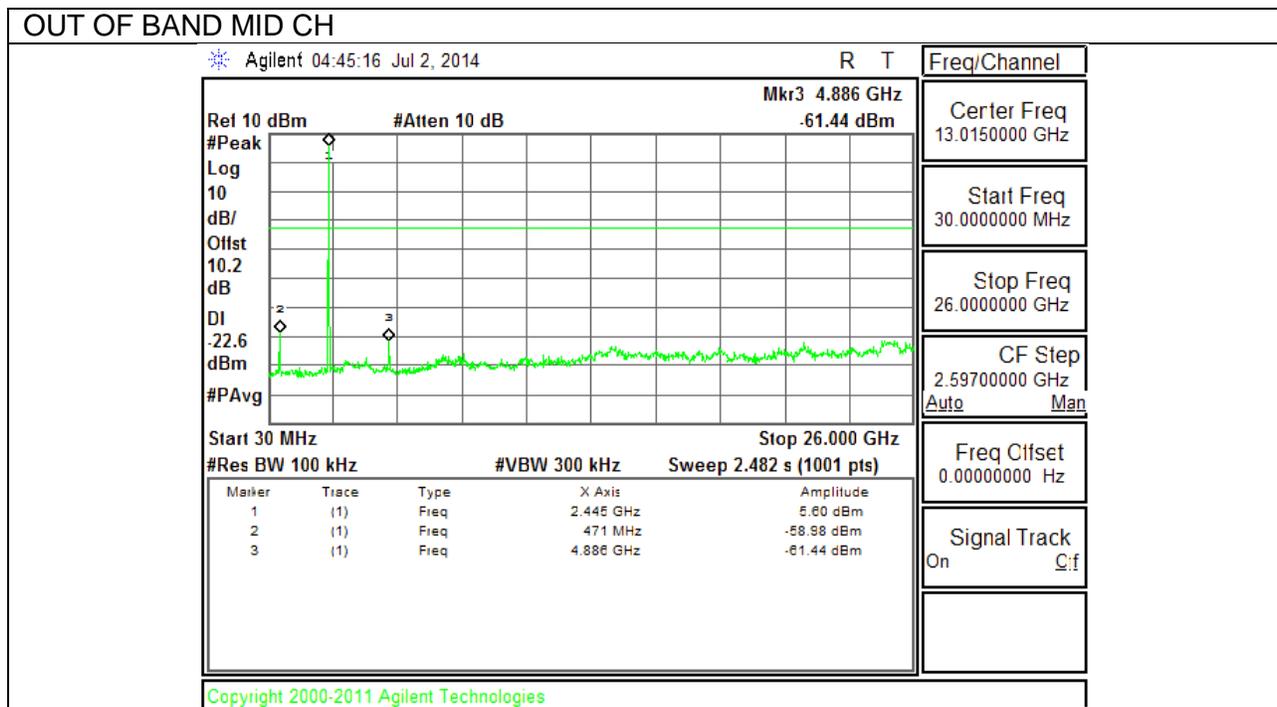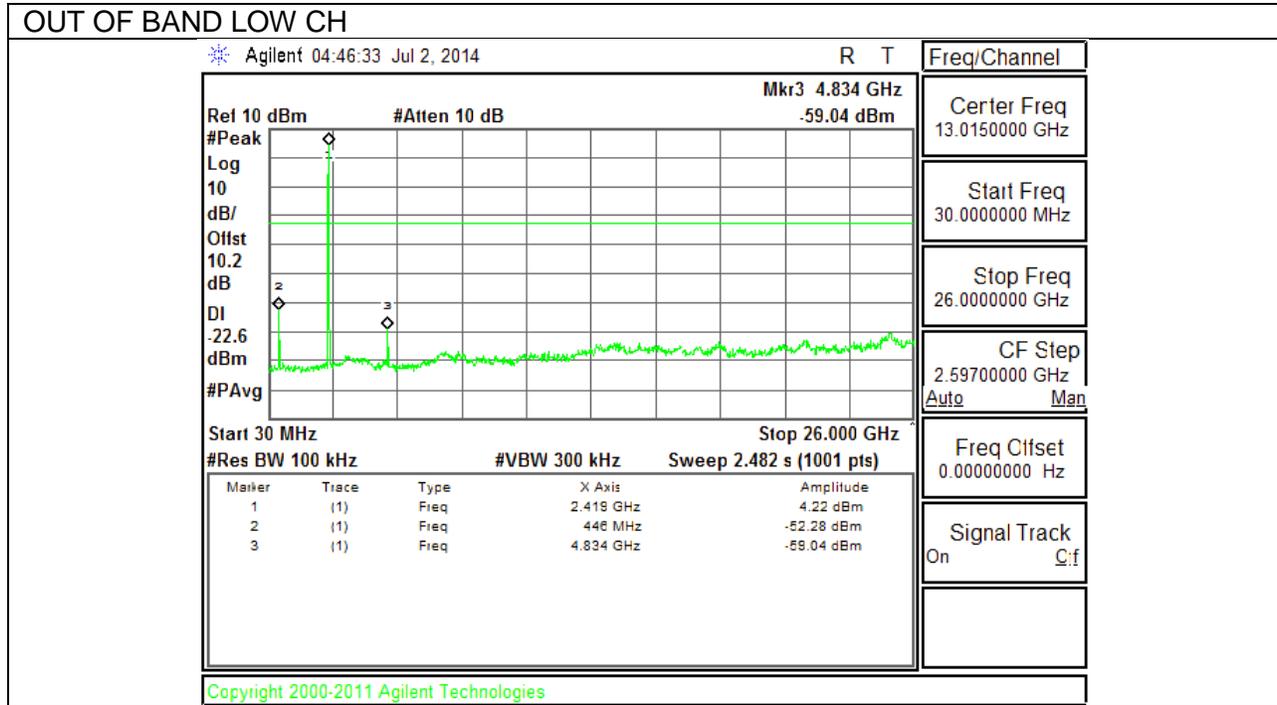


OUT OF BAND HIGH CH

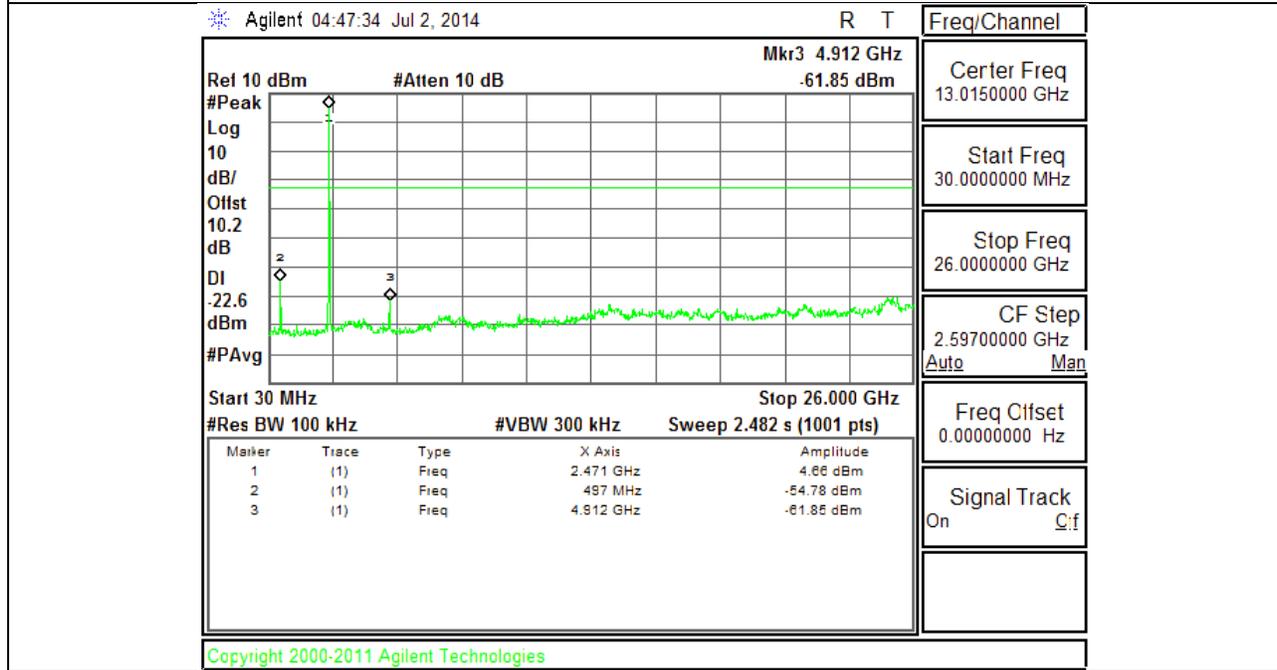


9.5.2. 802.11g MODE IN THE 2.4 GHz BAND


IN-BAND REFERENCE LEVEL

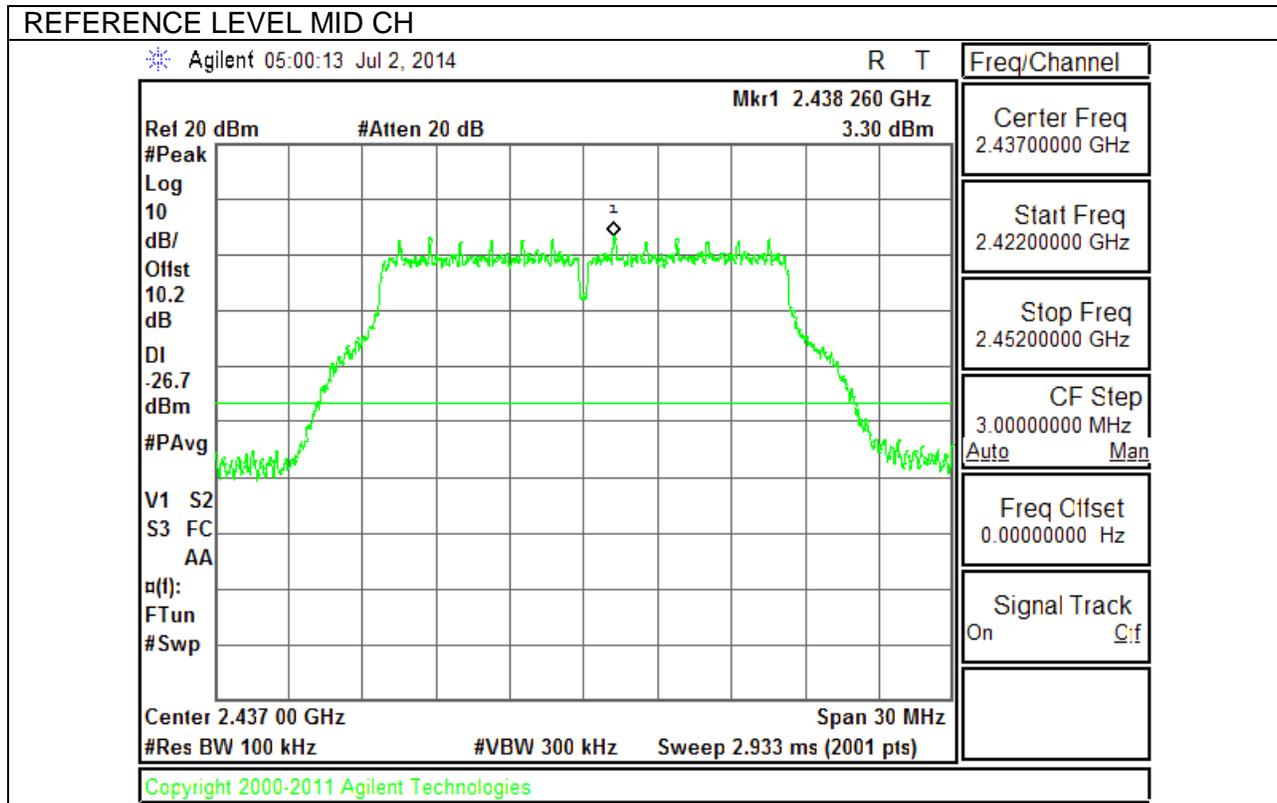



LOW CHANNEL BANDEDGE

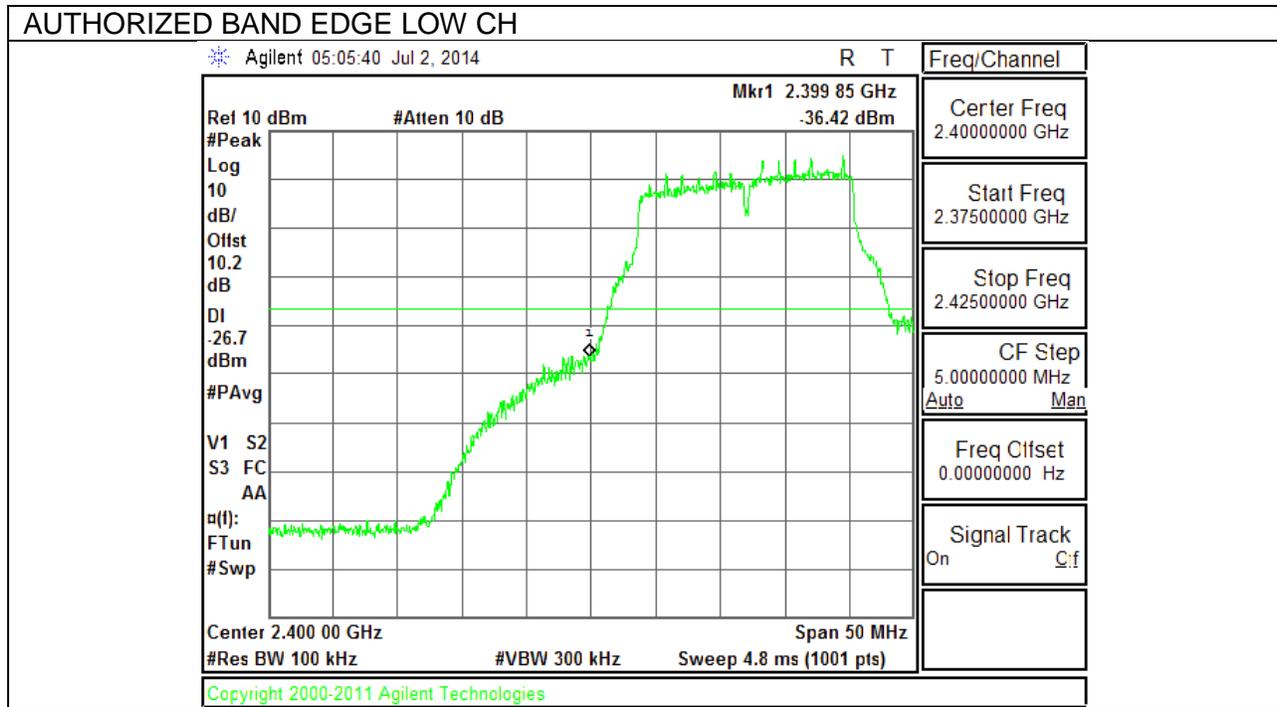


HIGH CHANNEL BANDEDGE

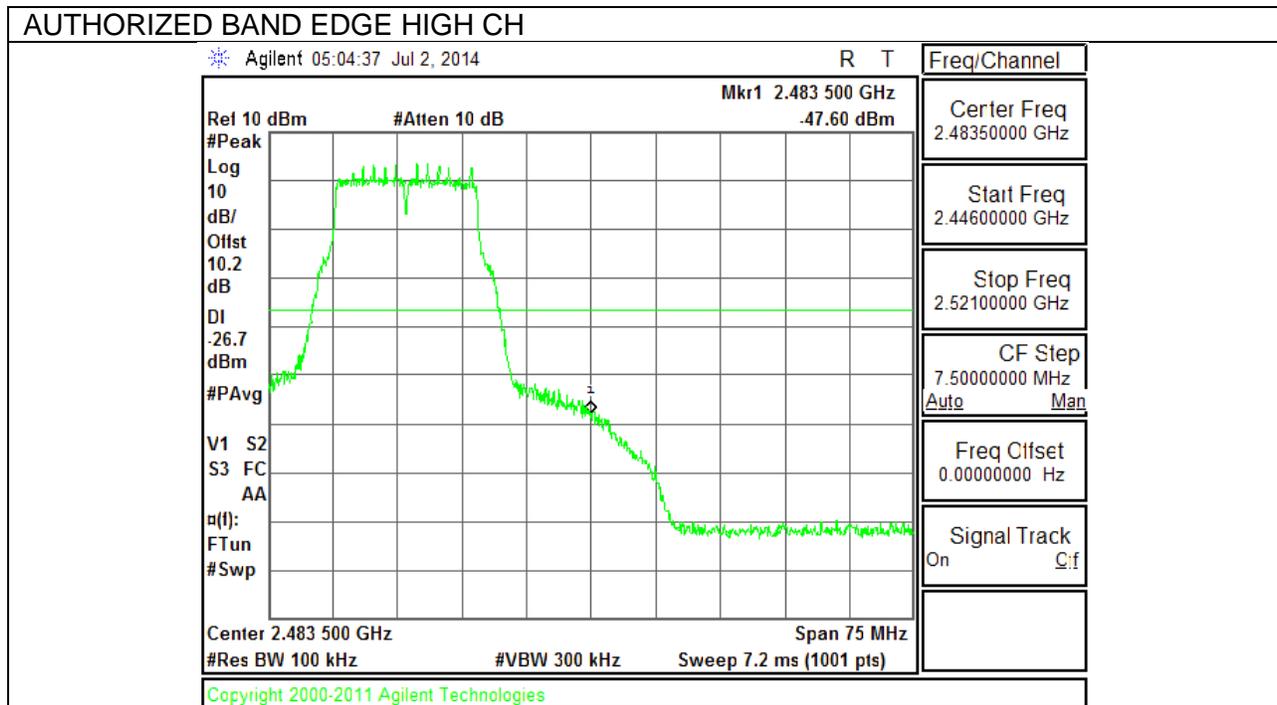

OUT-OF-BAND EMISSIONS

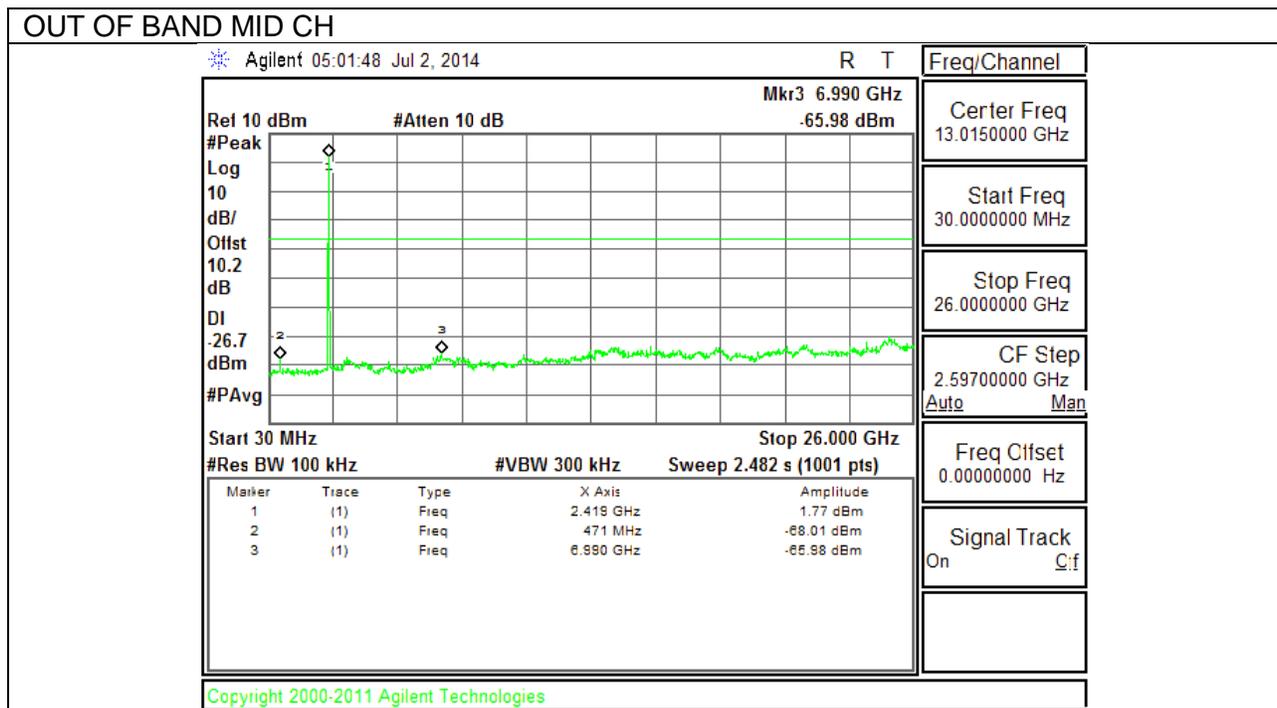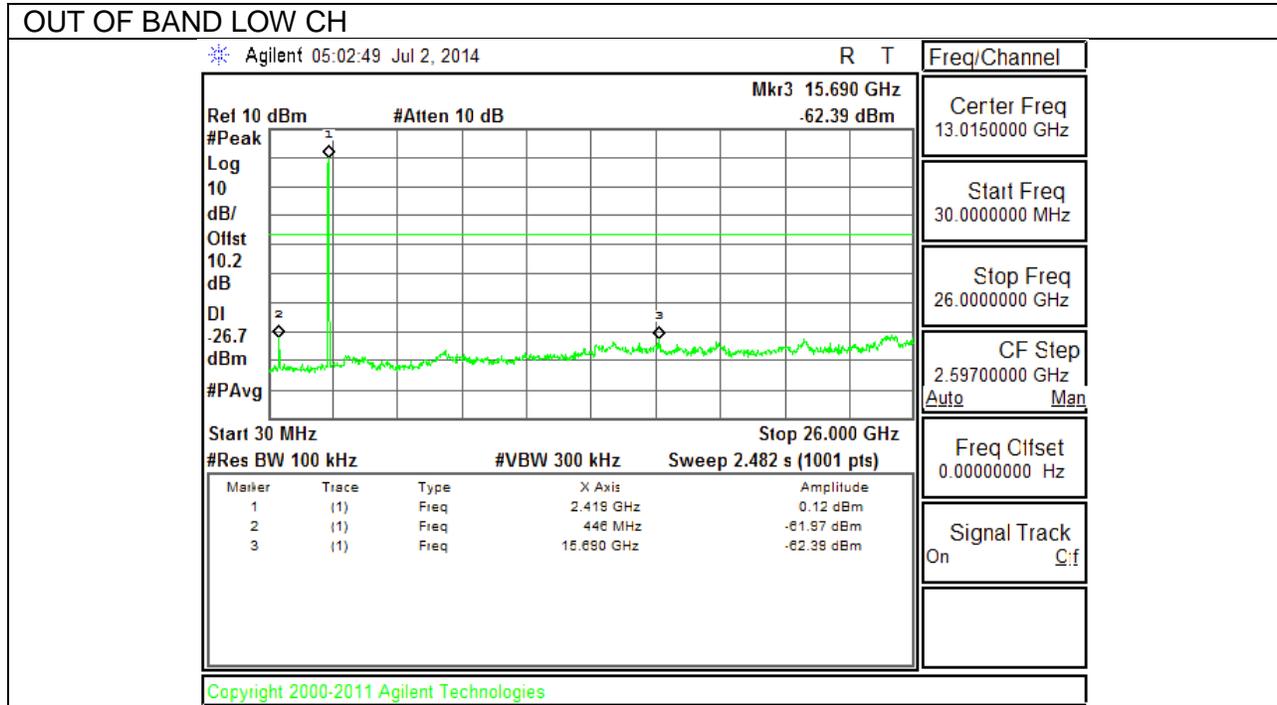


OUT OF BAND HIGH CH

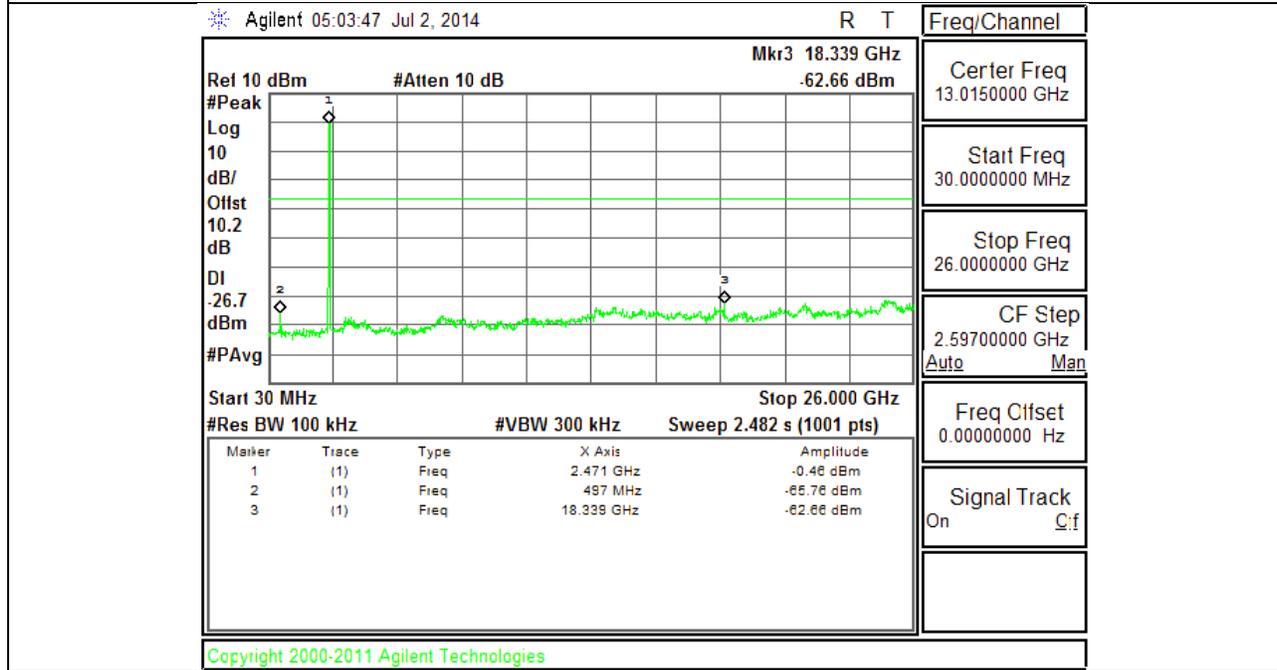


9.5.3. 802.11n MODE IN THE 2.4 GHz BAND


IN-BAND REFERENCE LEVEL

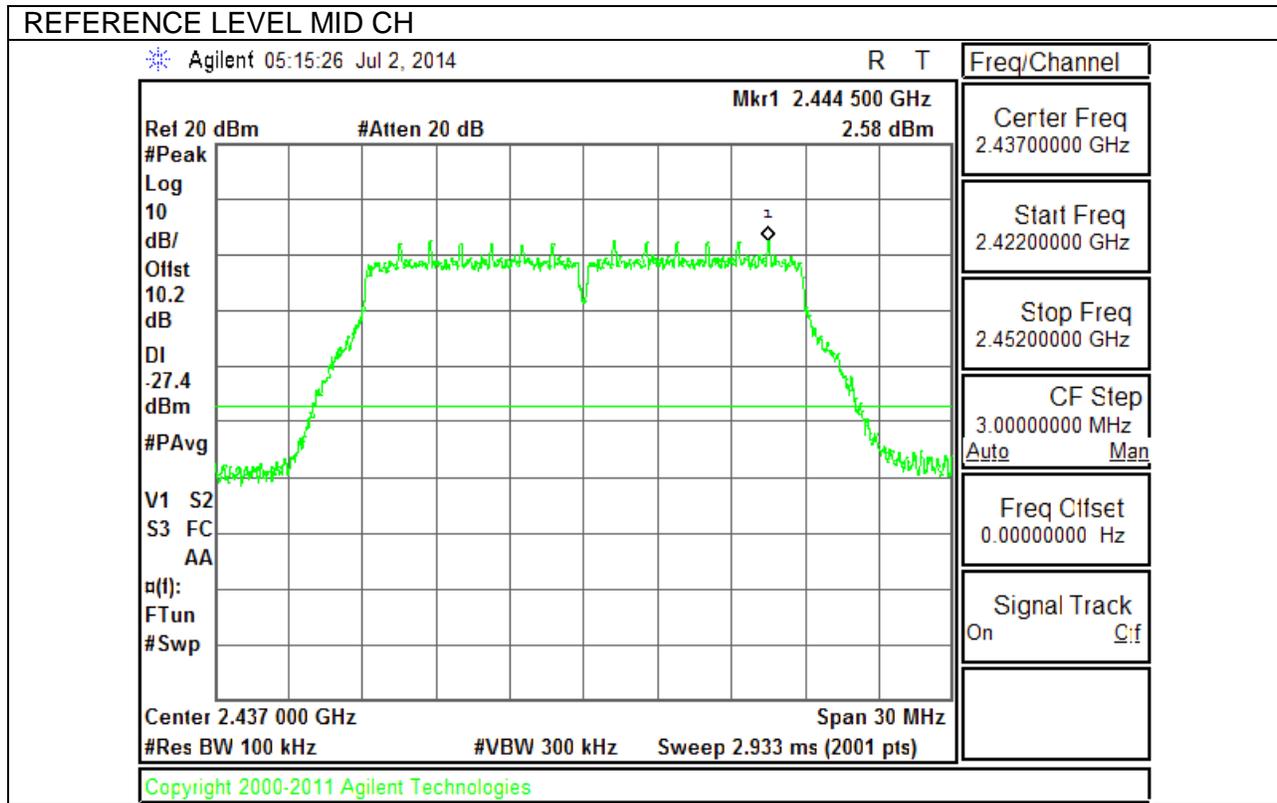



LOW CHANNEL BANDEDGE

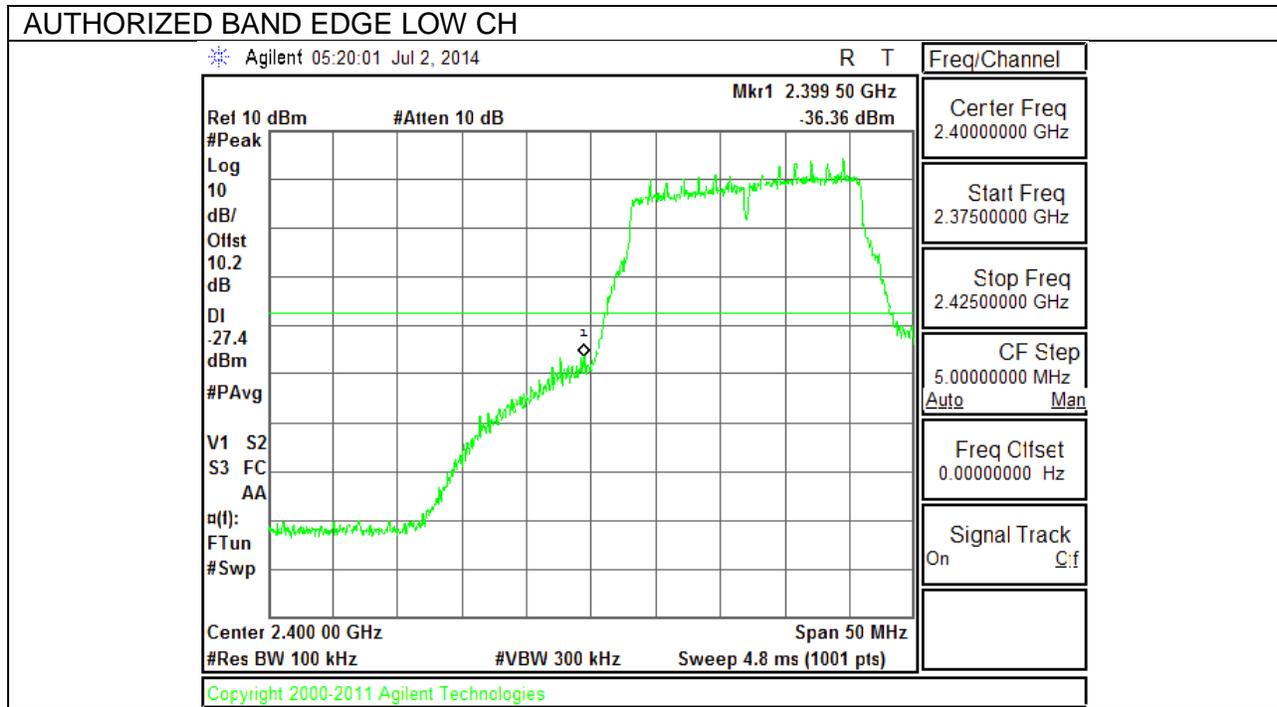


HIGH CHANNEL BANDEDGE

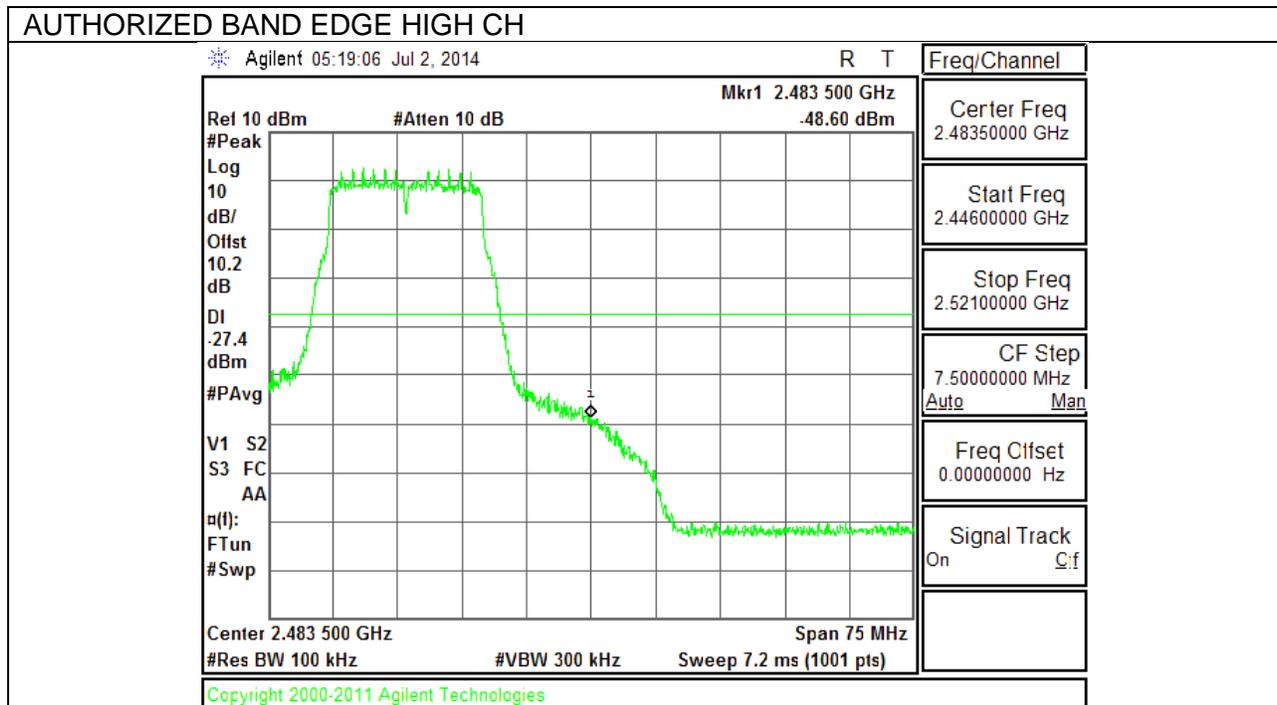

OUT-OF-BAND EMISSIONS

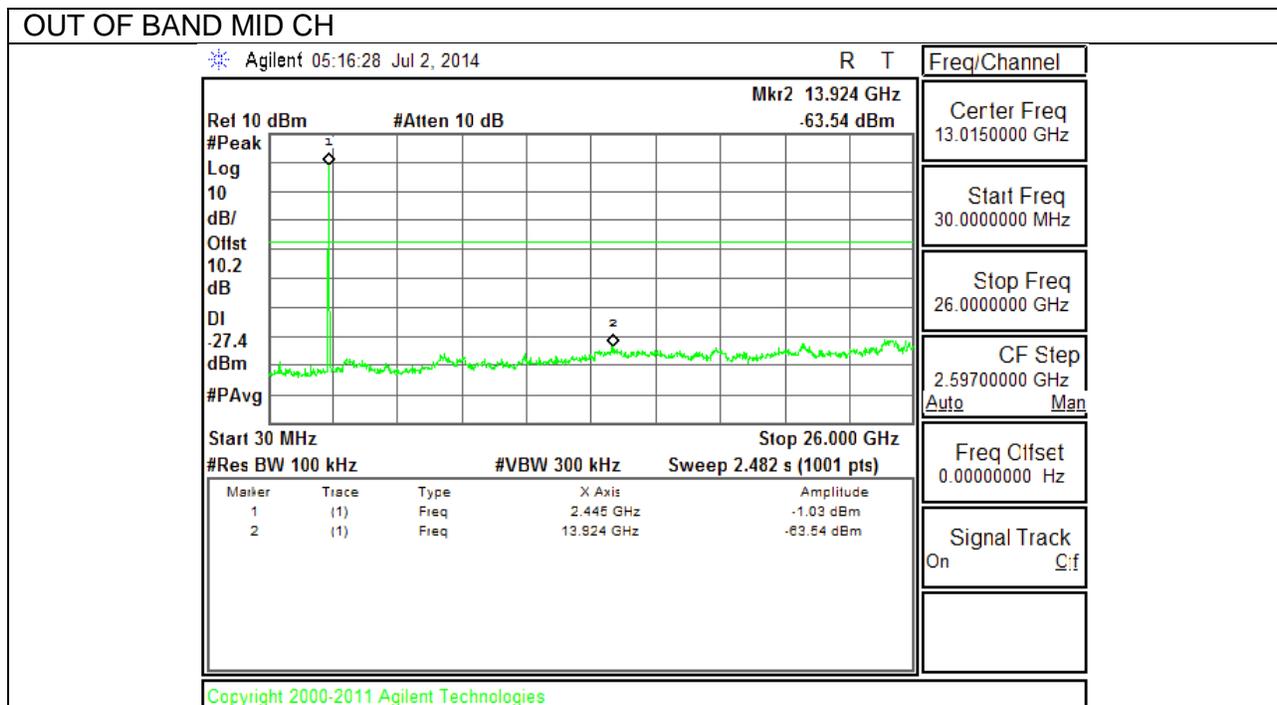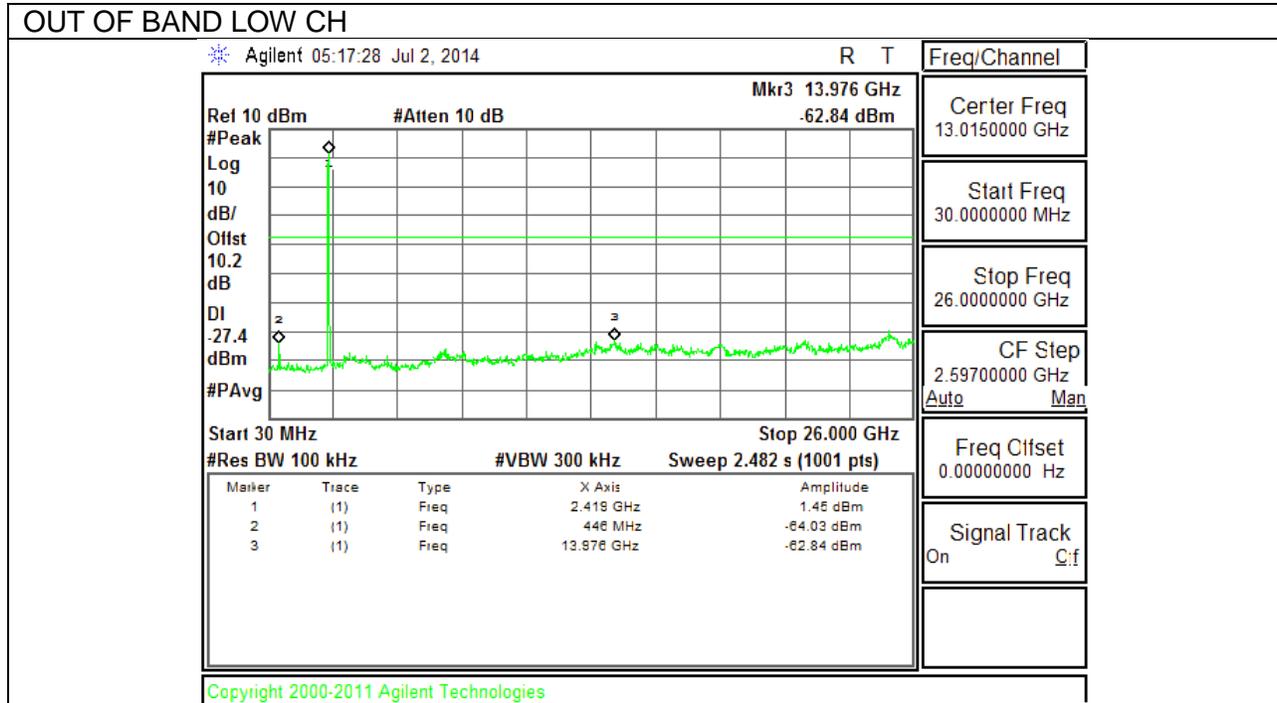

OUT OF BAND HIGH CH

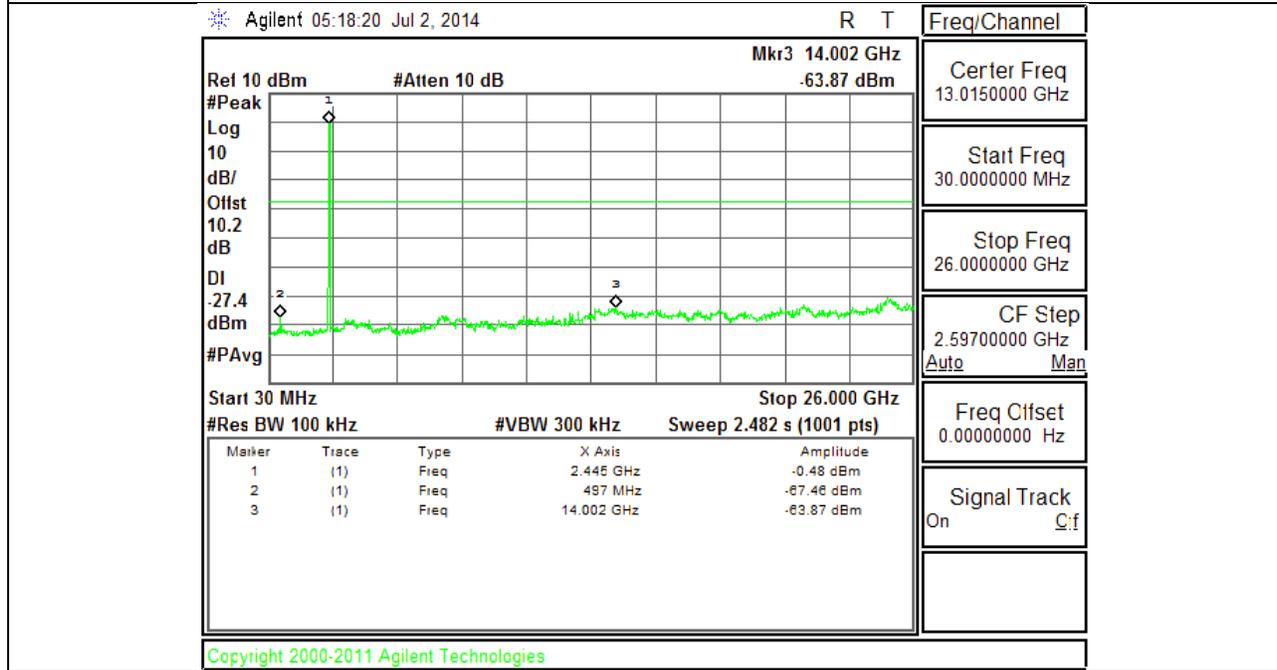

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and an RMS detector was used for average measurements since the duty cycle of the EUT is >98%.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


10.2. TRANSMITTER ABOVE 1 GHz

10.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

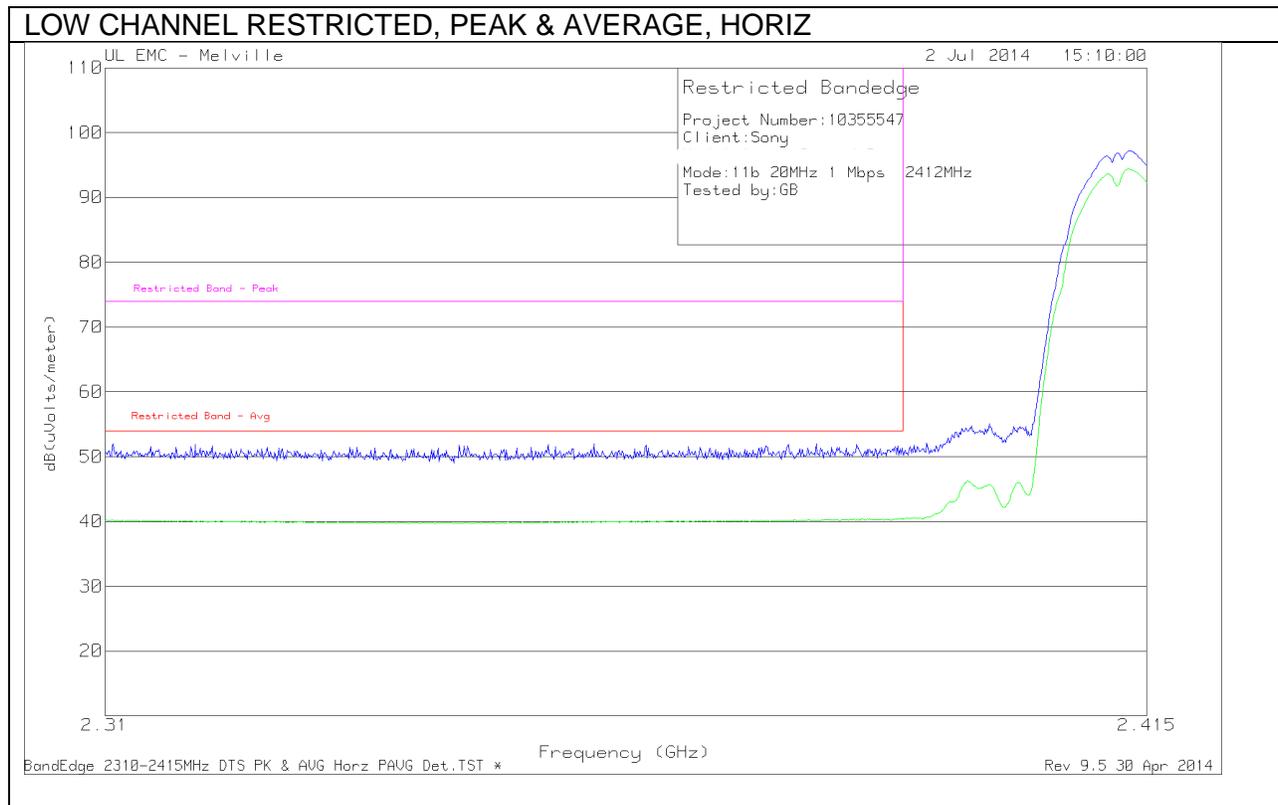


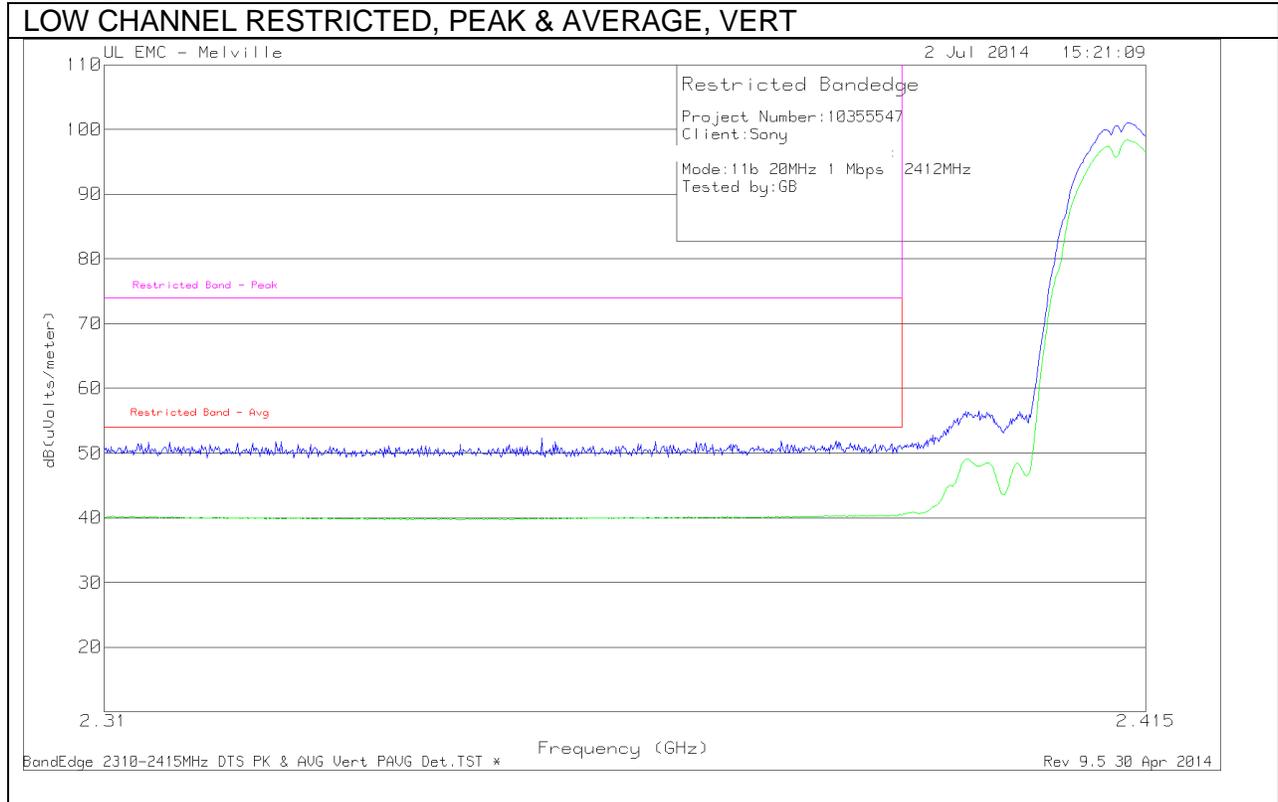

AUTHORIZED BANDEDGE (HIGH CHANNEL)

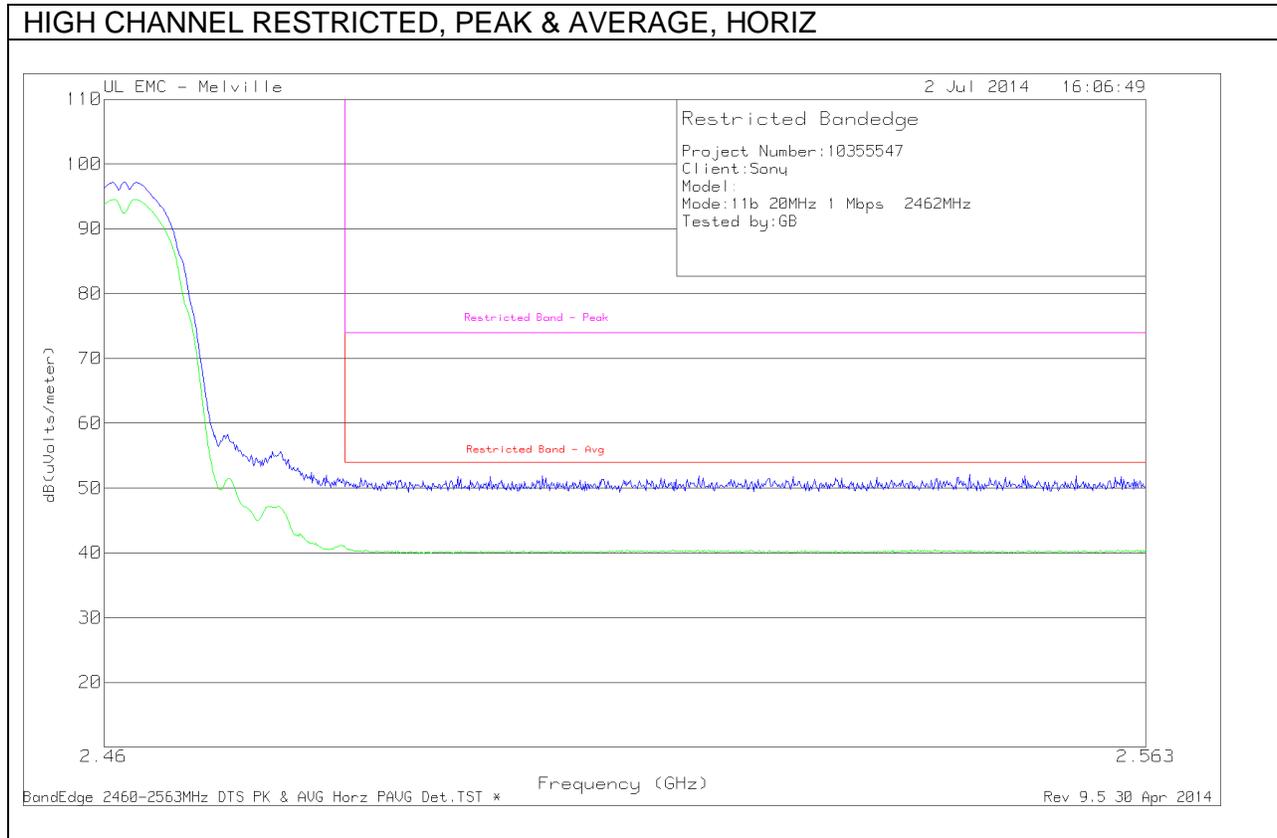


HIGH CHANNEL BANDEDGE, PEAK & AVERAGE, VERT

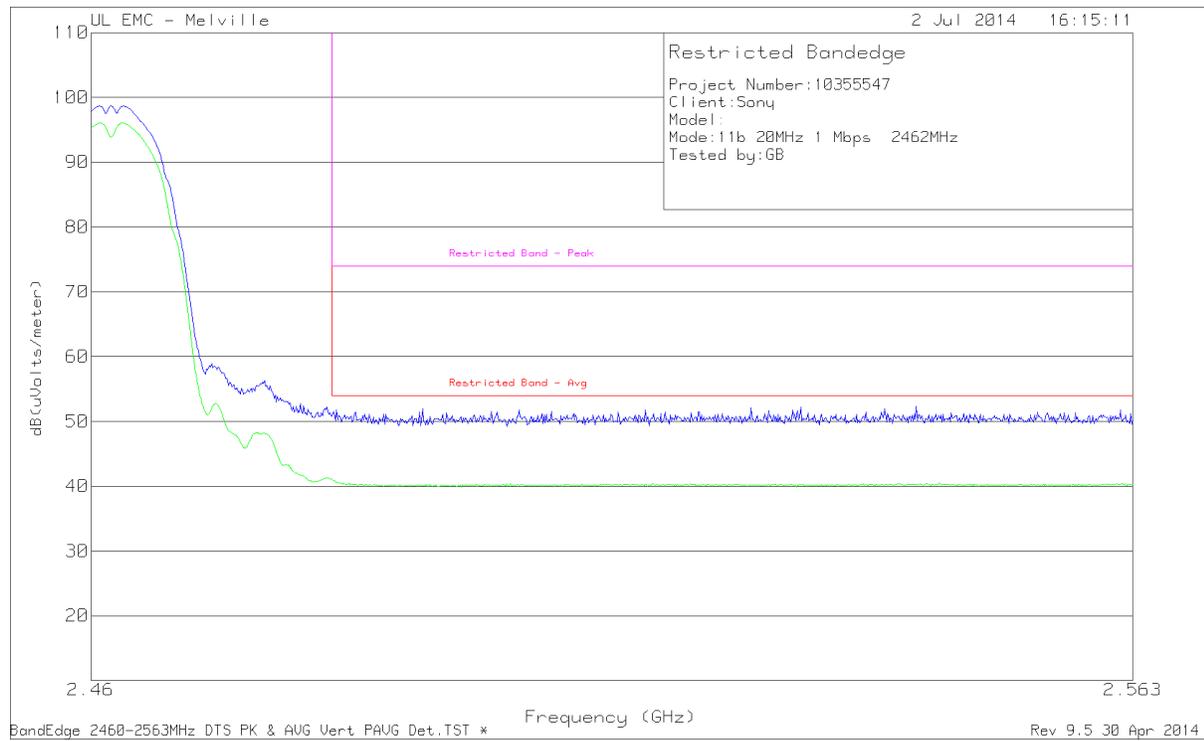


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL & VERTICAL

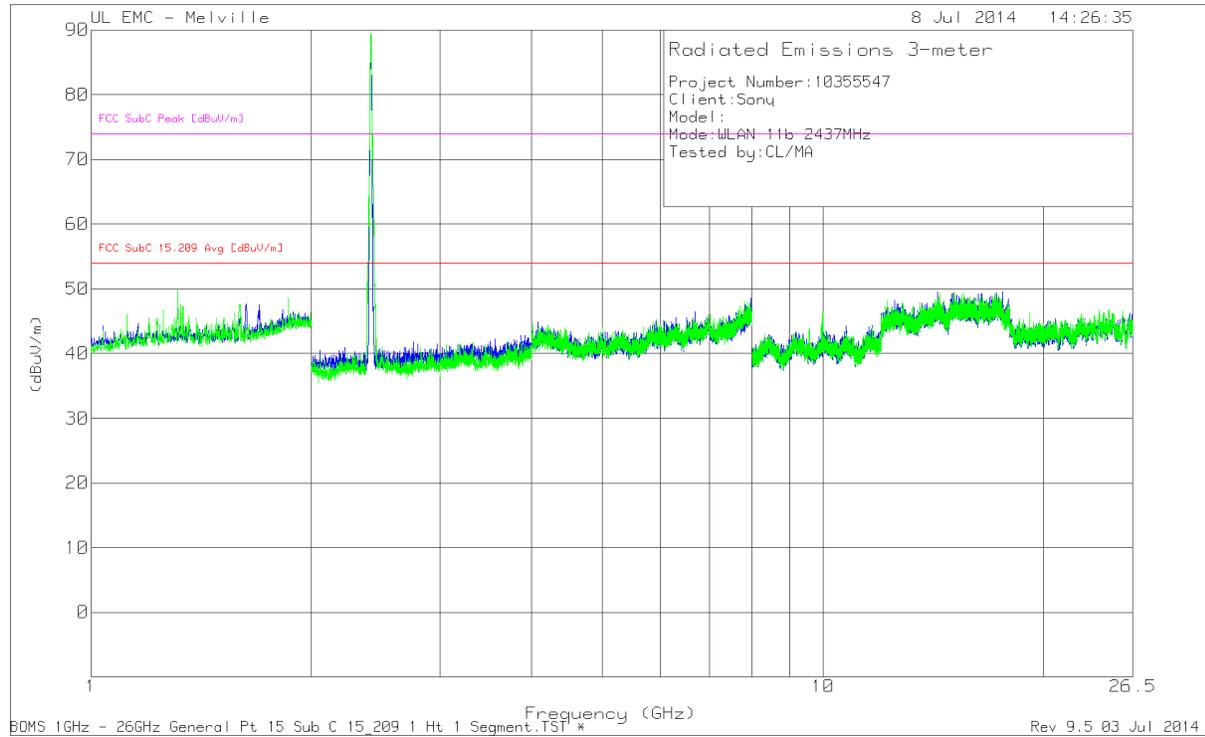


Note: No emissions were detected above the noise floor

MID CHANNEL
HORIZONTAL & VERTICAL

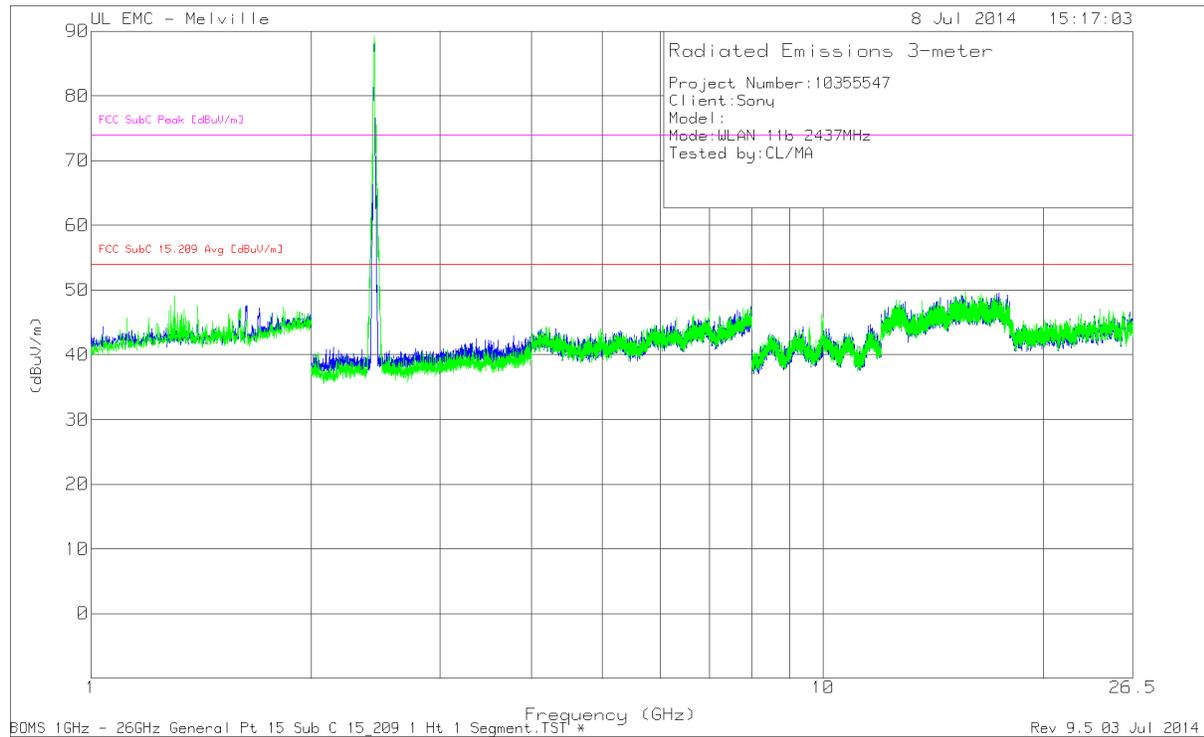


Note: No emissions were detected above the noise floor

HIGH CHANNEL HORIZONTAL & VERTICAL

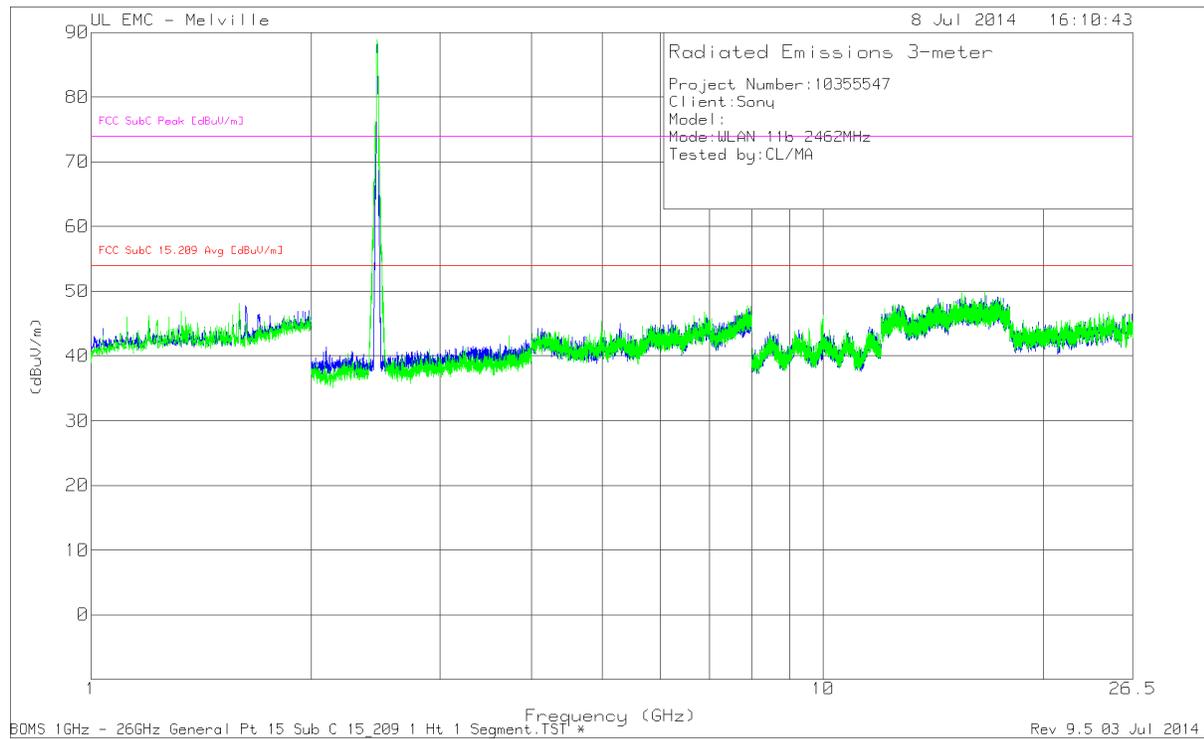


Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


**10.2.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND
RESTRICTED BANDEDGE (LOW CHANNEL)**

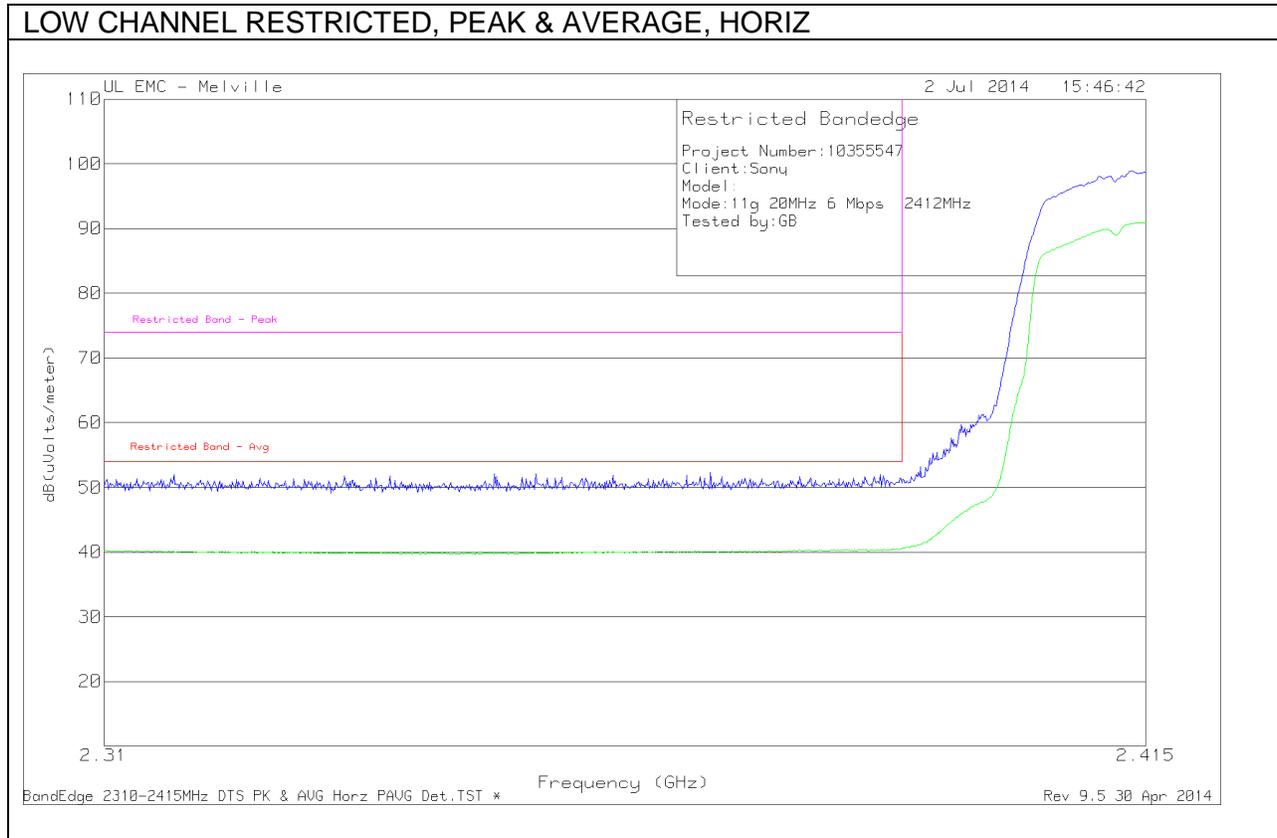


LOW CHANNEL RESTRICTED, PEAK & AVERAGE, VERT

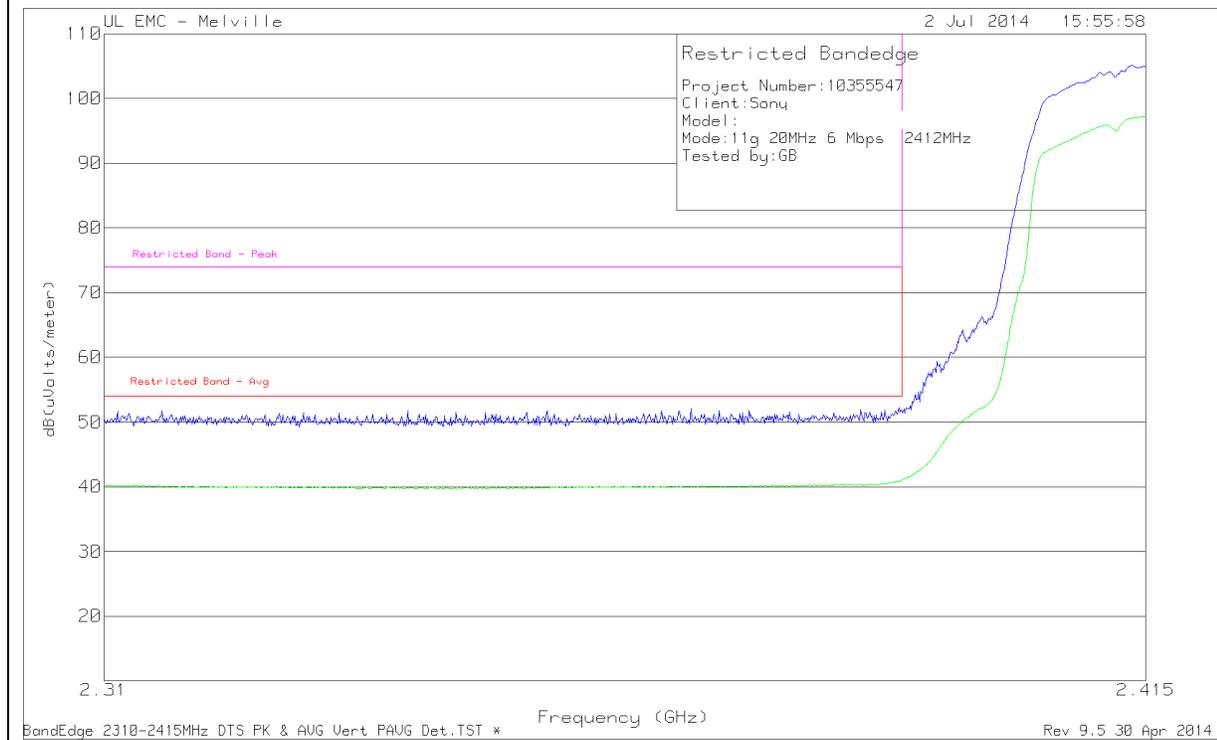

AUTHORIZED BANDEDGE (HIGH CHANNEL)

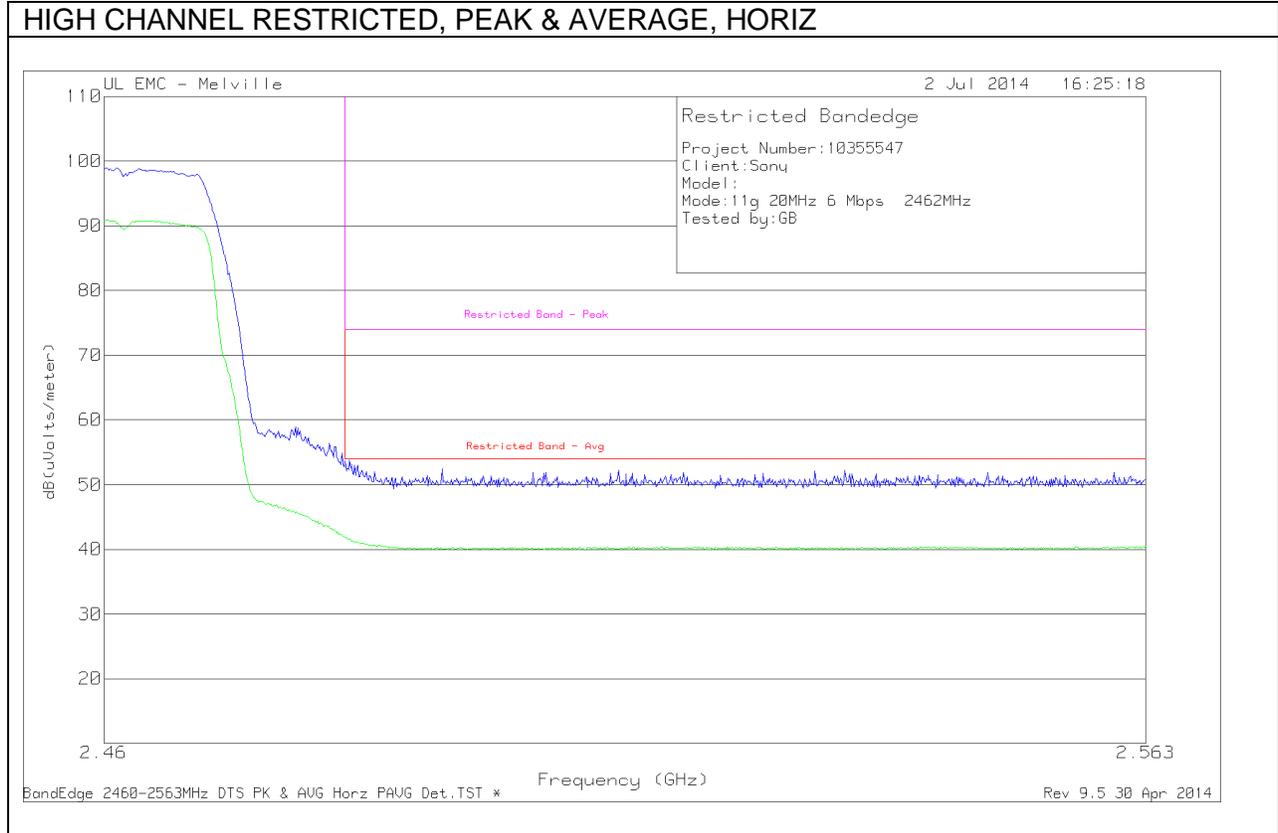


HIGH CHANNEL BANDEDGE, PEAK & AVERAGE, VERT

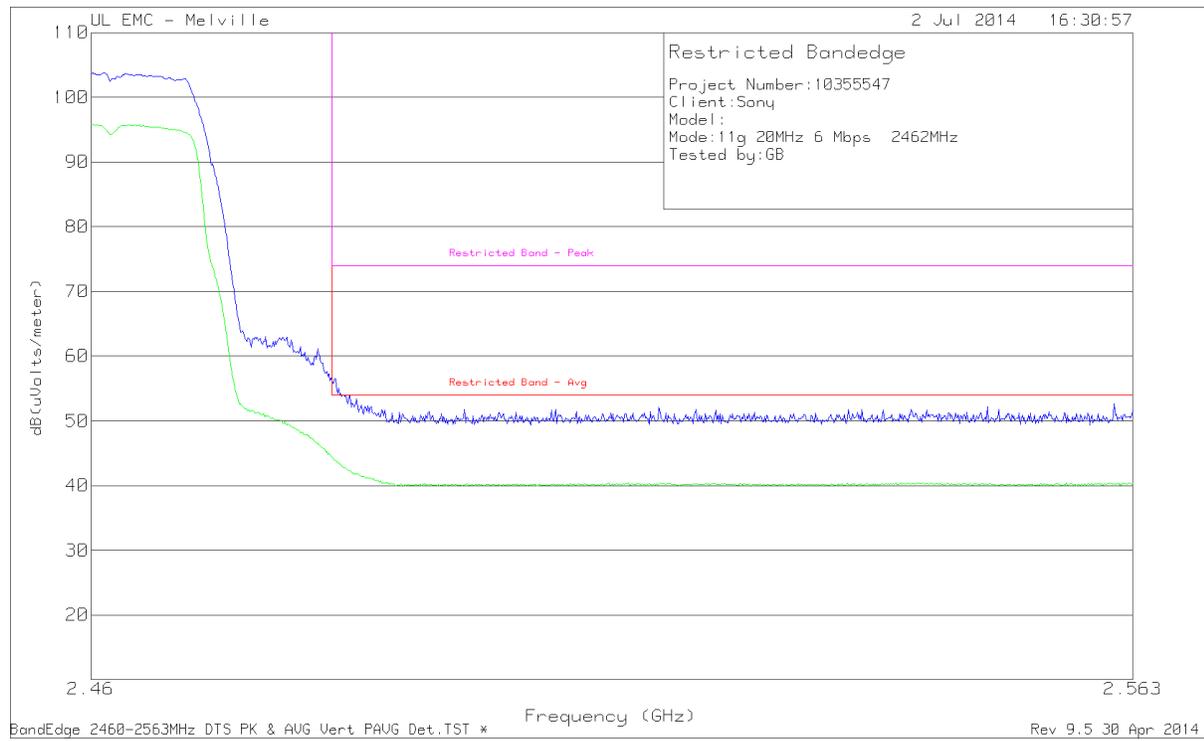


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL & VERTICAL

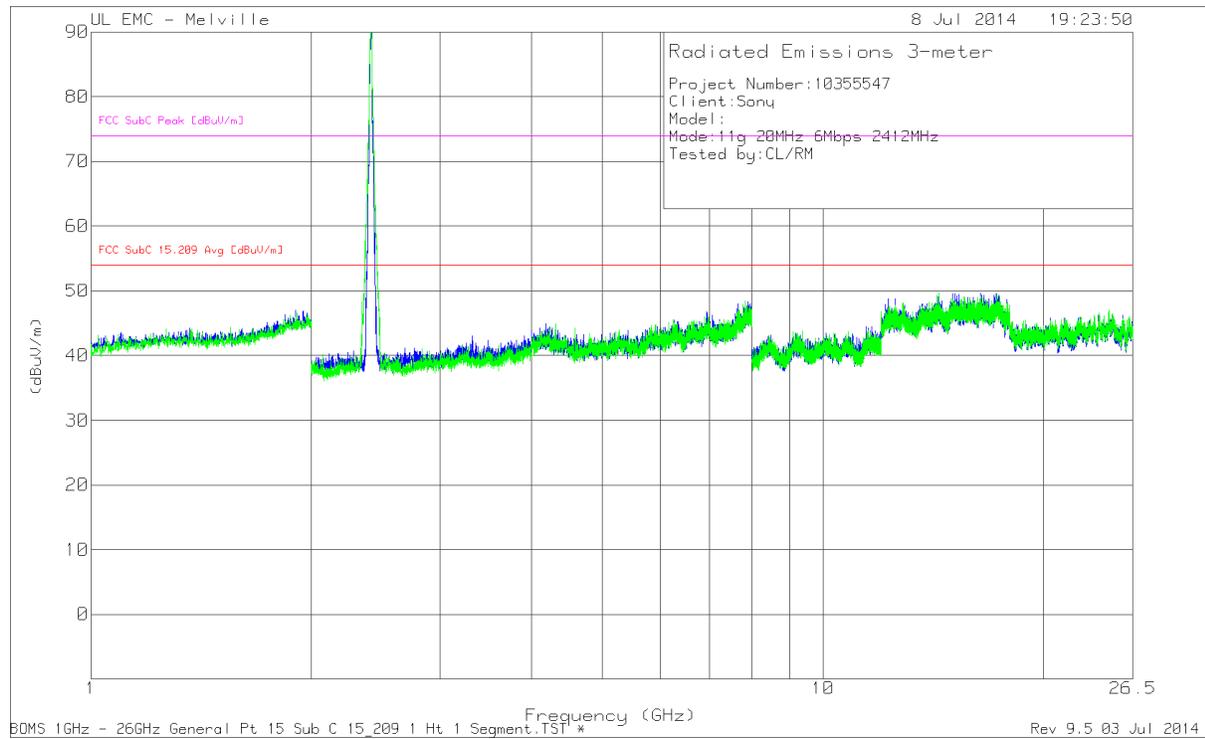


Note: No emissions were detected above the noise floor

MID CHANNEL
HORIZONTAL & VERTICAL

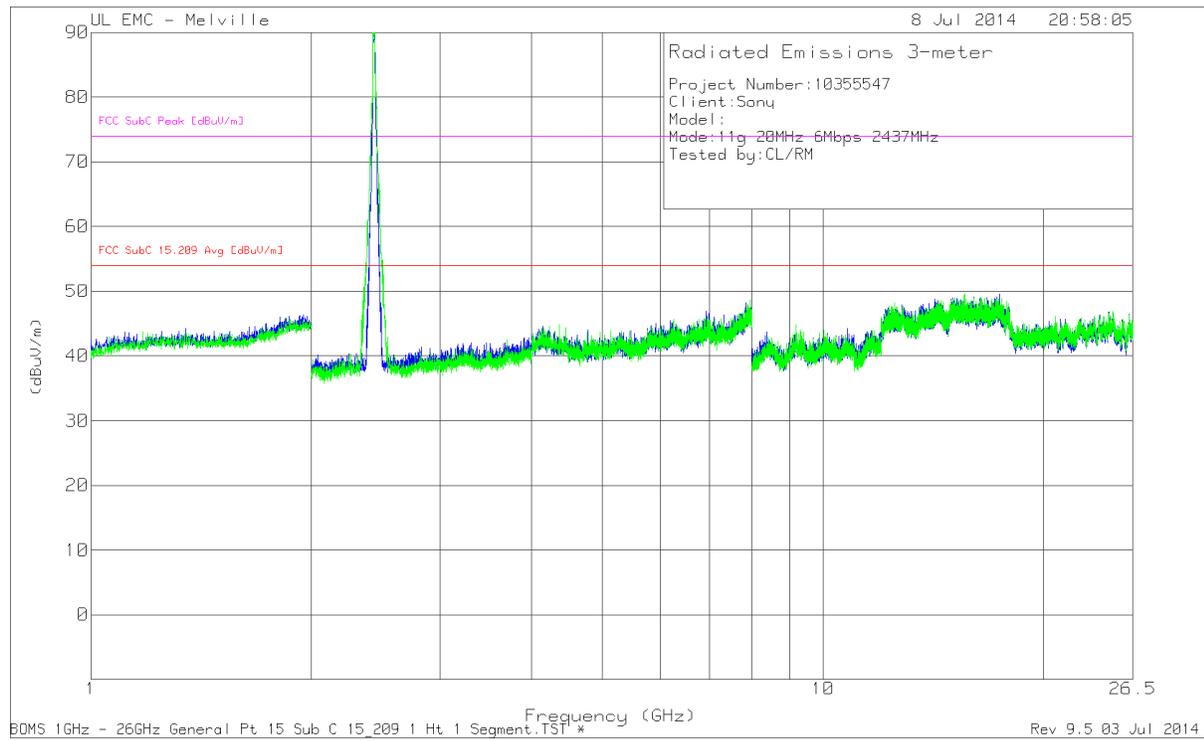


Note: No emissions were detected above the noise floor

HIGH CHANNEL HORIZONTAL & VERTICAL

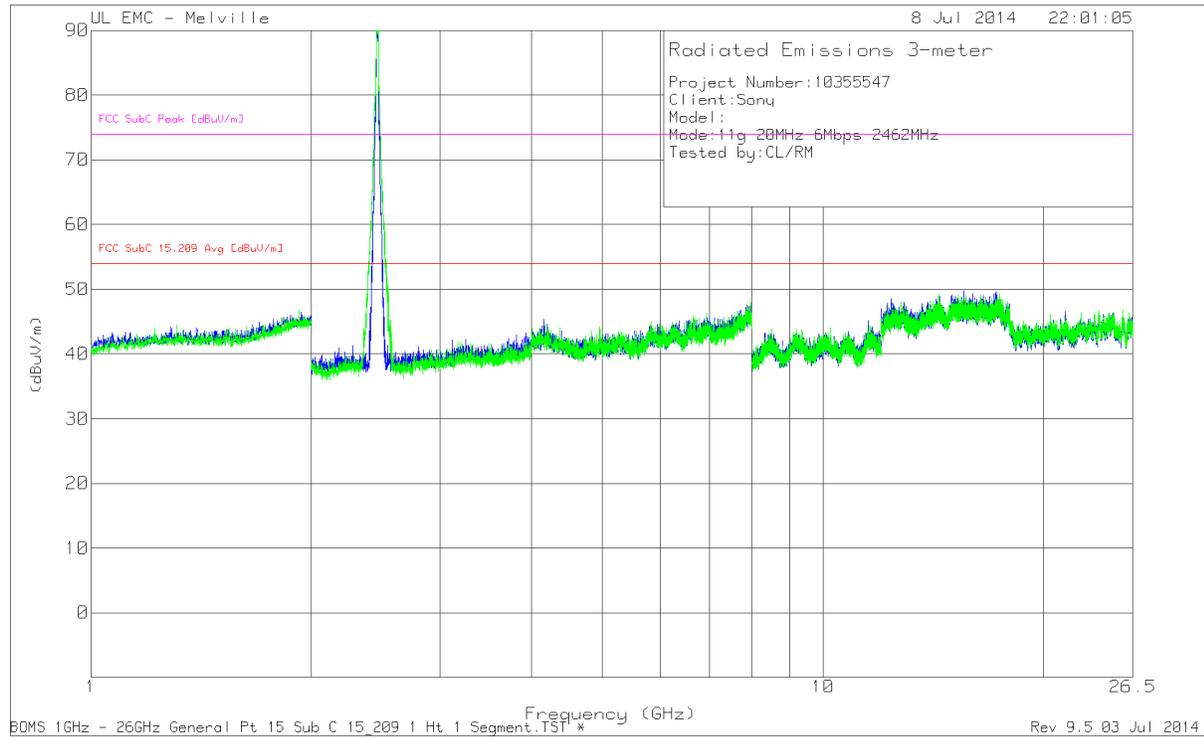


Note: No emissions were detected above the noise floor


**10.2.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND
RESTRICTED BANDEDGE (LOW CHANNEL)**

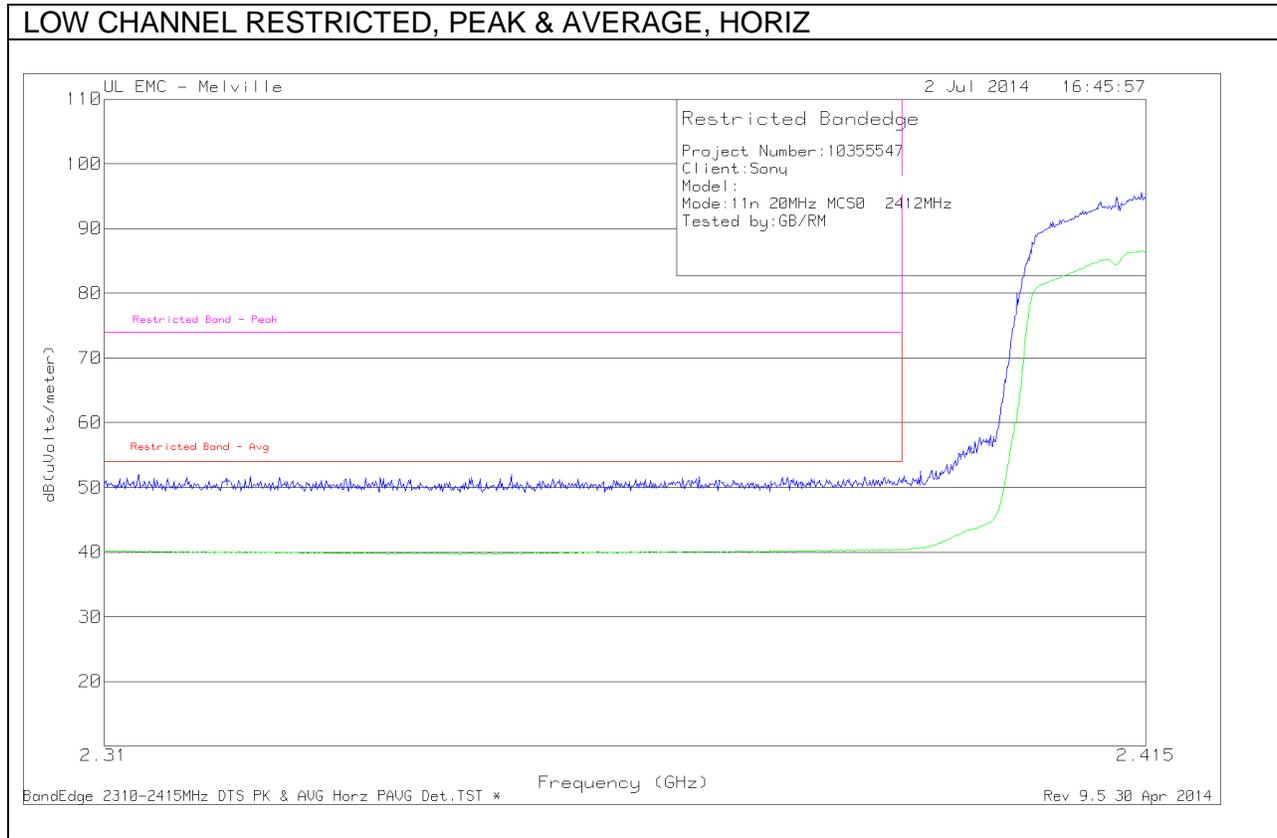


LOW CHANNEL RESTRICTED, PEAK& AVERAGE, VERT

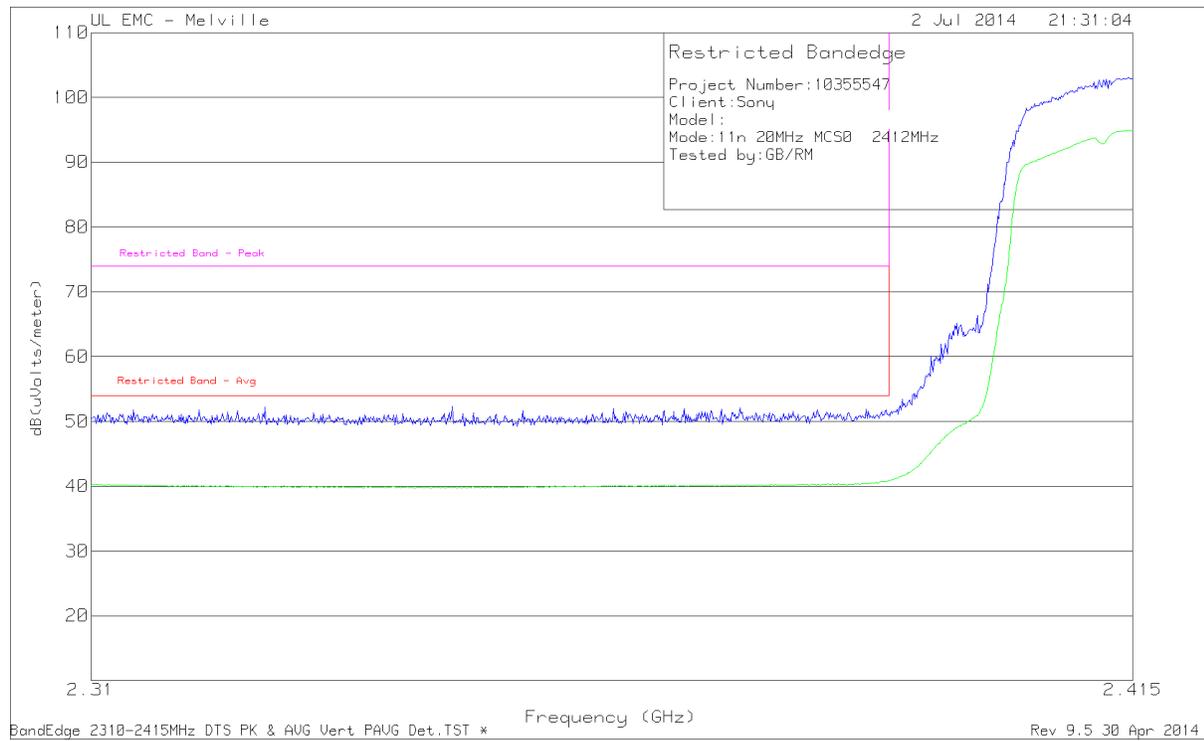

AUTHORIZED BANDEDGE (HIGH CHANNEL)

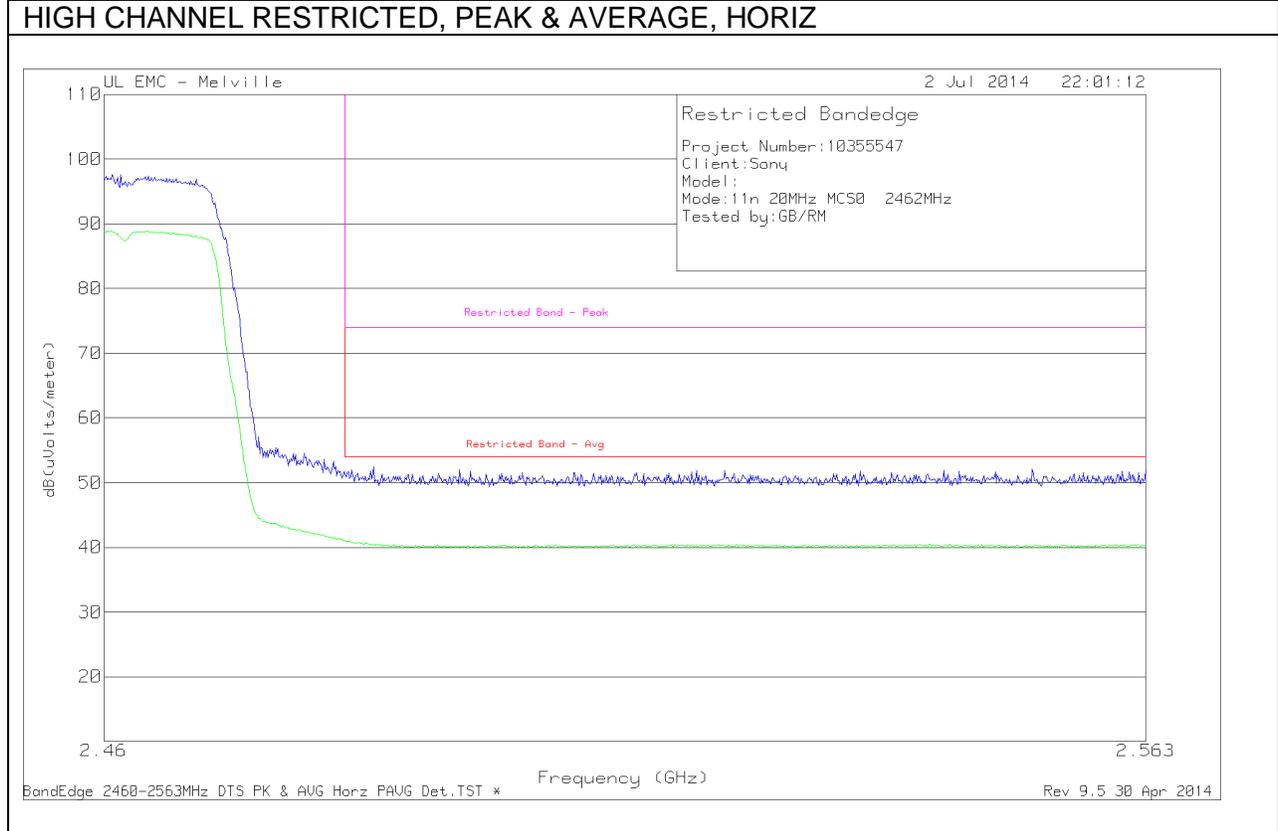


HIGH CHANNEL BANDEDGE, PEAK & AVERAGE, VERT

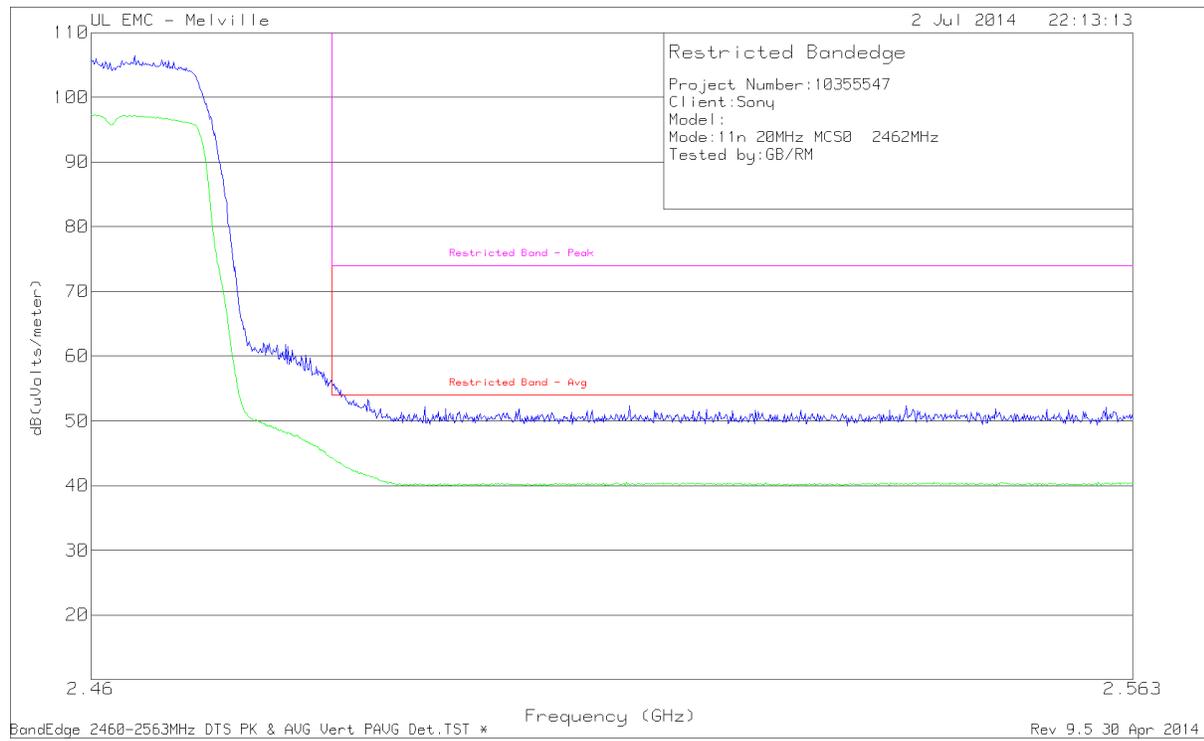


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL & VERTICAL

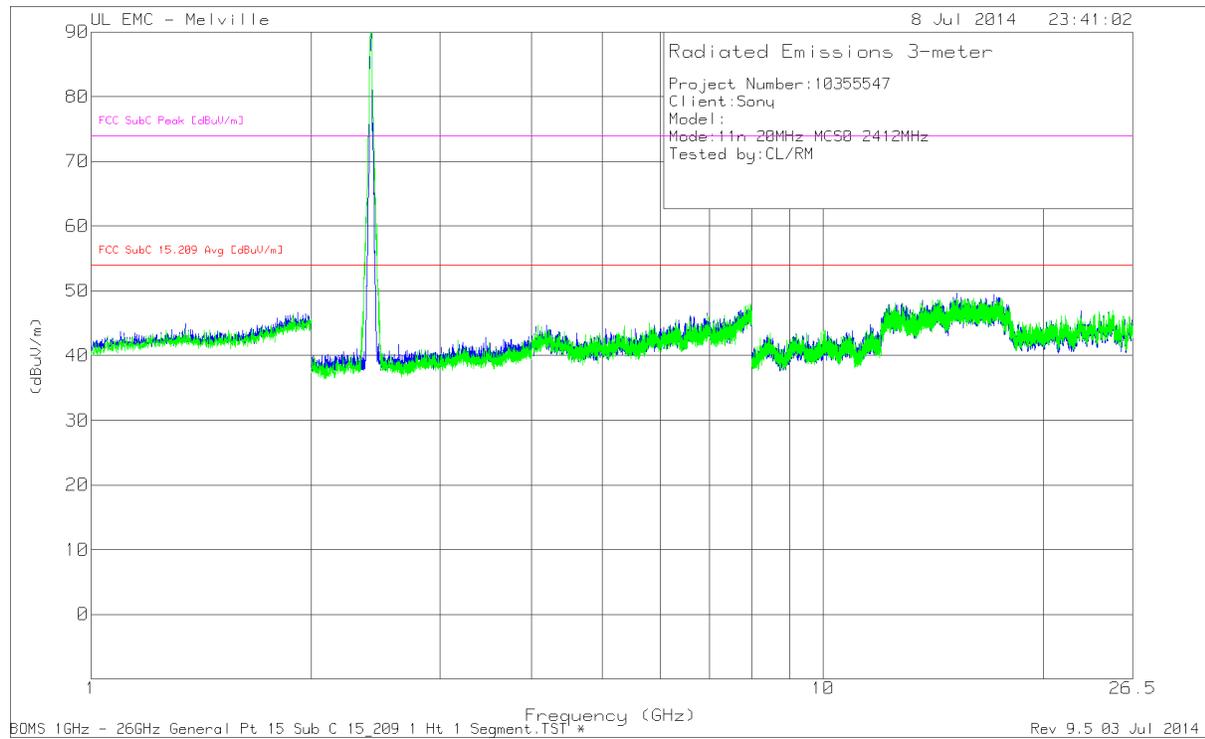


Note: No emissions were detected above the noise floor

MID CHANNEL
HORIZONTAL & VERTICAL

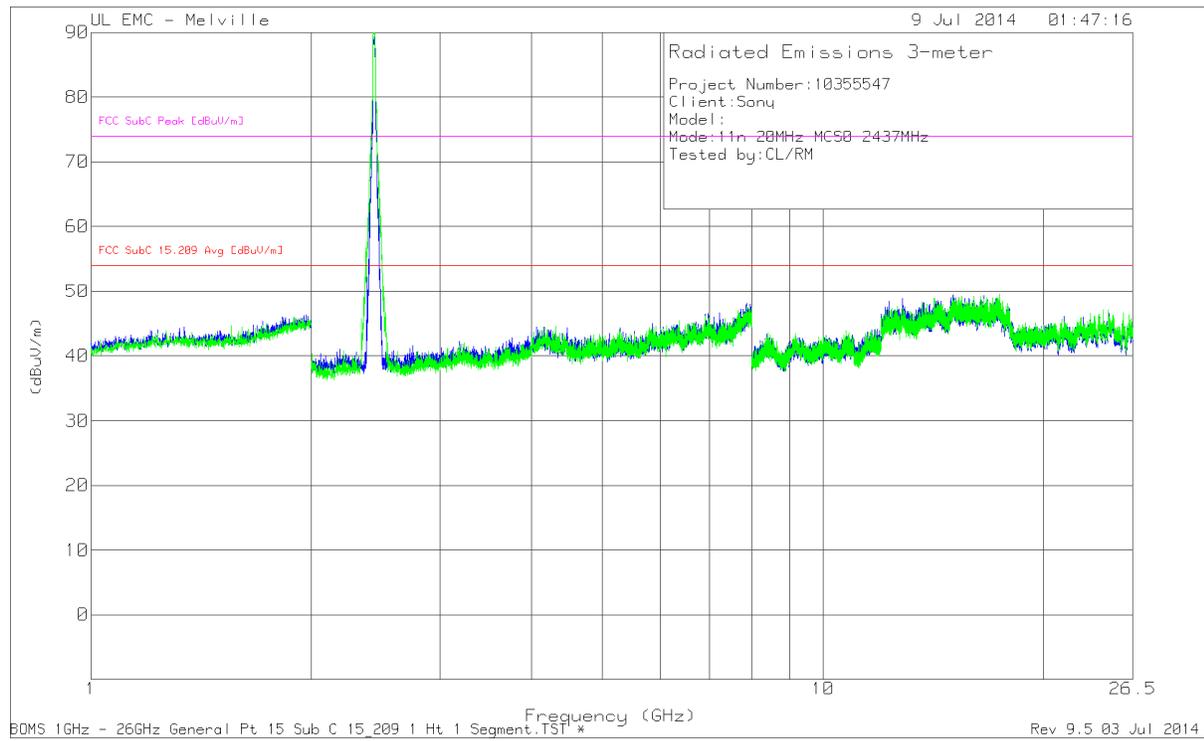

Note: No emissions were detected above the noise floor


**HIGH CHANNEL
HORIZONTAL & VERTICAL**

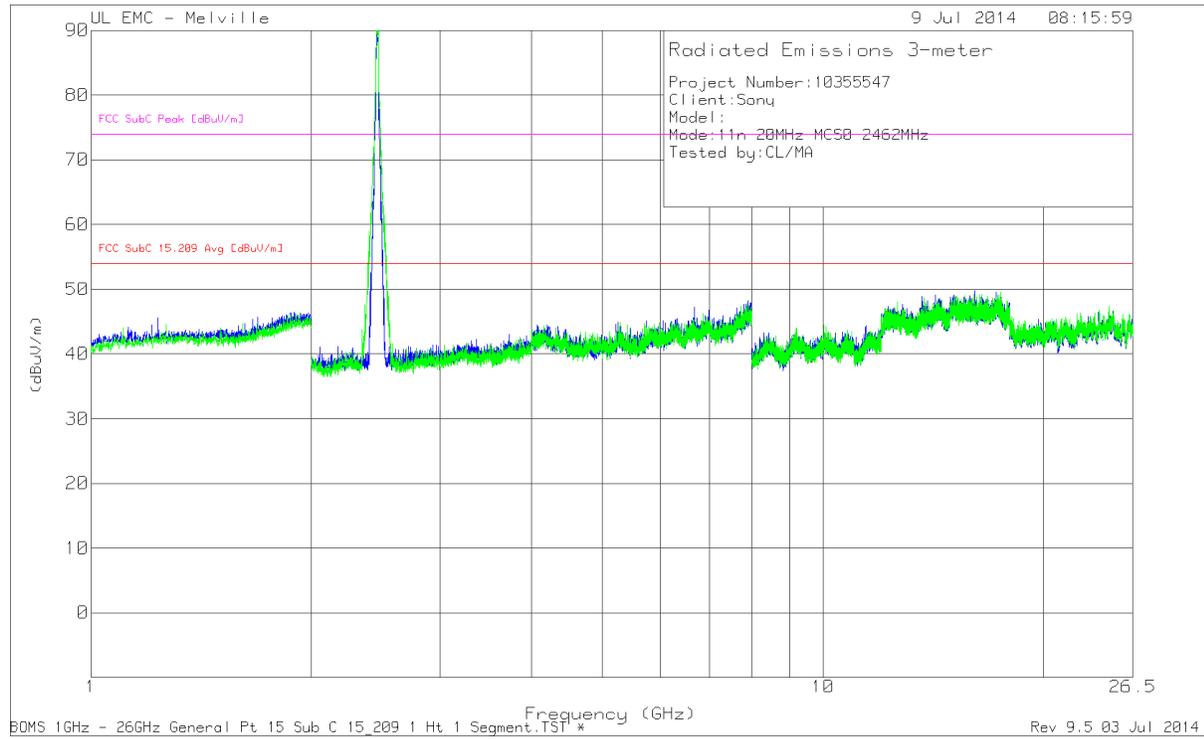

Note: No emissions were detected above the noise floor which

10.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

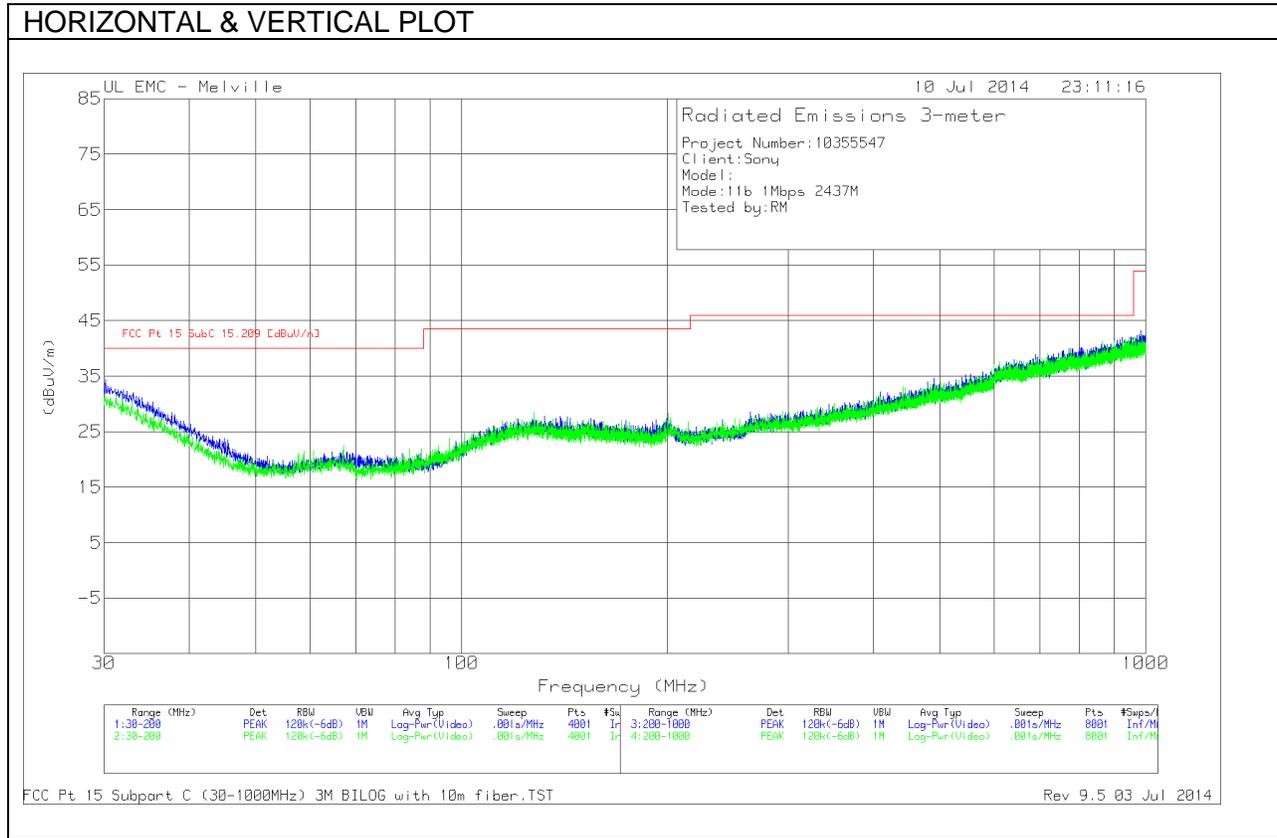

Below 1G Data

Frequency (MHz)	Meter Reading (dBuV)	Det	AF-84106 [dB/m]	GL [dB]	Corrected Reading (dBuV/m)	FCC Pt 15 SubC 15.209 [dBuV/m]	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
139.2675	12.56	PK	13.6	1.7	27.86	43.5	-15.64	0-360	250	H
199.4475	12.36	PK	13	2.1	27.46	43.5	-16.04	0-360	250	H
* 127.58	12.19	PK	14.6	1.6	28.39	43.5	-15.11	0-360	100	V
* 264.1	12.83	PK	13.3	2.4	28.53	46	-17.47	0-360	100	H
490.5	13.35	PK	17.9	3.4	34.65	46	-11.35	0-360	400	H
441.8	13.08	PK	16.8	3.2	33.08	46	-12.92	0-360	300	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
 PK - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4 2009.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS


6 WORST EMISSIONS

Line-L1 .15 - 30MHz										
Trace Markers										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.1905	33.03	PK	1	0	34.03	64	-29.97	-	-
2	.1905	16.13	Av	1	0	17.13	-	-	54	-36.87
3	.375	34.63	PK	.4	0	35.03	58.4	-23.37	-	-
4	.375	24.29	Av	.4	0	24.69	-	-	48.4	-23.71
5	1.221	39.47	PK	.2	.1	39.77	56	-16.23	-	-
6	1.221	22.24	Av	.2	.1	22.54	-	-	46	-23.46
7	1.3785	39.9	PK	.2	.1	40.2	56	-15.8	-	-
8	1.3785	21.33	Av	.2	.1	21.63	-	-	46	-24.37
9	5.055	33.66	PK	.2	.1	33.96	60	-26.04	-	-
10	5.055	16.54	Av	.2	.1	16.84	-	-	50	-33.16
11	15.0135	33.57	PK	.3	.2	34.07	60	-25.93	-	-
12	15.0135	16.69	Av	.3	.2	17.19	-	-	50	-32.81

Line-L2 .15 - 30MHz										
Trace Markers										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
13	.186	34.32	PK	1.1	0	35.42	64.2	-28.78	-	-
14	.186	14.03	Av	1.1	0	15.13	-	-	54.2	-39.07
15	.33675	31.42	PK	.5	0	31.92	59.3	-27.38	-	-
16	.33675	10.81	Av	.5	0	11.31	-	-	49.3	-37.99
17	1.1985	37.92	PK	.3	.1	38.32	56	-17.68	-	-
18	1.1985	20.93	Av	.3	.1	21.33	-	-	46	-24.67
19	1.3425	37.59	PK	.2	0	37.79	56	-18.21	-	-
20	1.3425	20.41	Av	.2	0	20.61	-	-	46	-25.39
21	13.515	29.4	PK	.3	.2	29.9	60	-30.1	-	-
22	13.515	12.76	Av	.3	.2	13.26	-	-	50	-36.74
23	16.0665	30	PK	.3	.2	30.5	60	-29.5	-	-
24	16.0665	12.25	Av	.3	.2	12.75	-	-	50	-37.25

PK - Peak detector
 Av - average detection

LINE 1 RESULTS

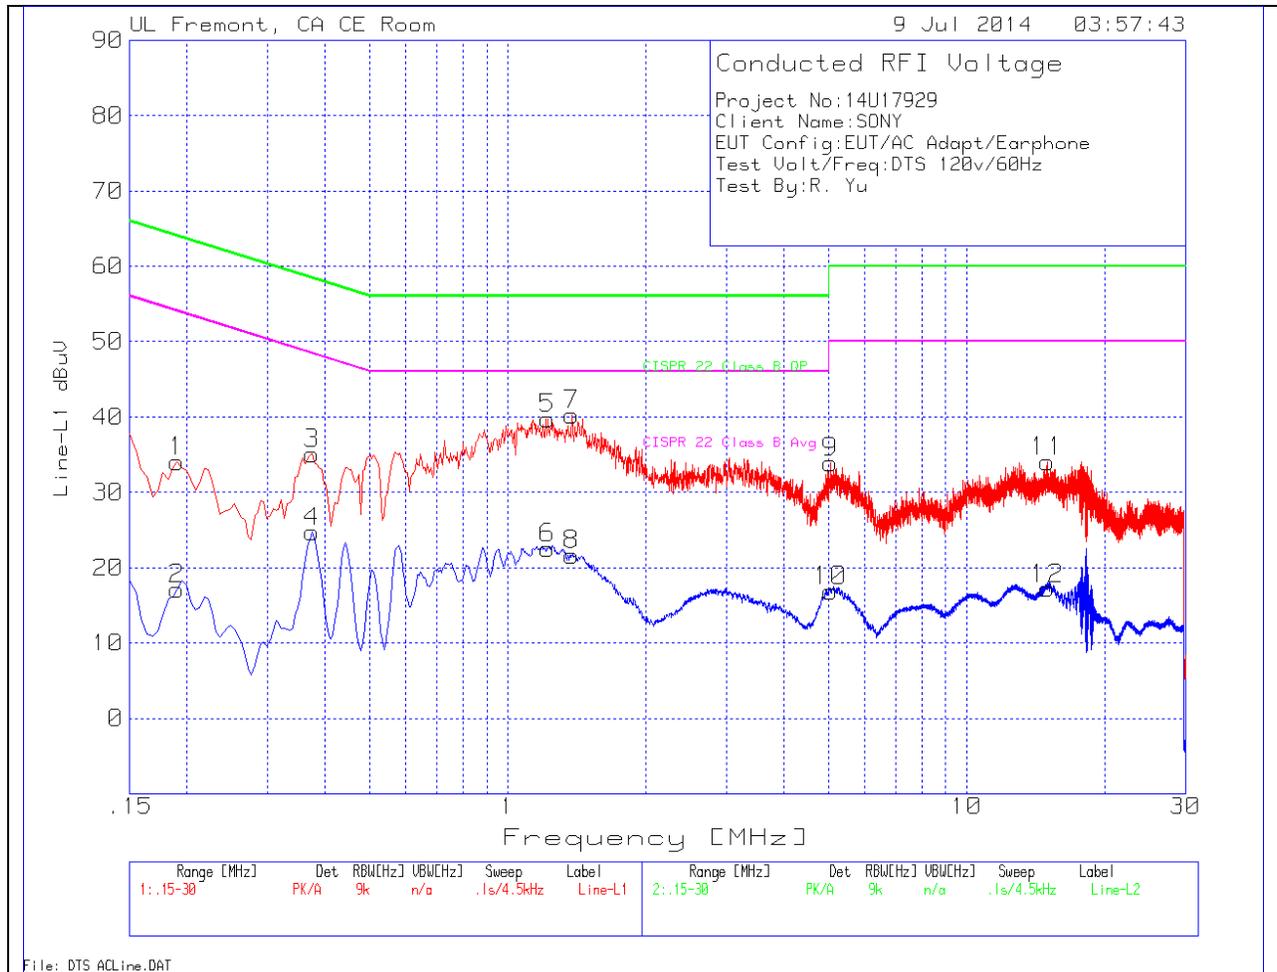

LINE 2 RESULTS

