



**FCC CFR47 PART 22 SUBPART H  
FCC CFR47 PART 24 SUBPART E  
FCC CFR47 PART 27 SUBPART M  
CERTIFICATION TEST REPORT**

**FOR**

**GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, ANT+ & NFC**

**FCC ID: PY7PM-0812**

**REPORT NUMBER: 14U17927-1**

**ISSUE DATE: JULY 16, 2014**

*Prepared for*

**SONY MOBILE COMMUNICATIONS, INC.  
Nya Vattentornet Mobilvagen 10  
Lund 22188  
Sweden**

*Prepared by*

**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

---

**Revision History**

Rev.	Date	Revisions	Revised By
--	7/16/14	Initial issue	P. Zhang

## TABLE OF CONTENTS

<b>1.</b>	<b>ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2.</b>	<b>TEST METHODOLOGY .....</b>	<b>6</b>
<b>3.</b>	<b>FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4.</b>	<b>CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1.	MEASURING INSTRUMENT CALIBRATION .....	6
4.2.	SAMPLE CALCULATION .....	6
4.3.	MEASUREMENT UNCERTAINTY .....	7
<b>5.</b>	<b>EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1.	DESCRIPTION OF EUT .....	8
5.2.	MAXIMUM OUTPUT POWER.....	8
5.3.	MAXIMUM OUTPUT POWER (LTE).....	9
5.4.	DESCRIPTION OF AVAILABLE ANTENNAS .....	11
5.5.	DESCRIPTION OF TEST SETUP.....	12
<b>6.</b>	<b>TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>15</b>
<b>7.</b>	<b>Summary Table.....</b>	<b>16</b>
<b>8.</b>	<b>RF POWER OUTPUT VERIFICATION.....</b>	<b>17</b>
8.1.	GSM/GPRS/EDGE .....	17
8.1.1.	GSM OUTPUT POWER RESULT .....	18
8.2.	UMTS REL 99.....	20
8.2.1.	UMTS REL 99 OUTPUT POWER RESULT .....	20
8.3.	UMTS HSDPA .....	21
8.3.1.	UMTS HSDPA OUTPUT POWER RESULT.....	21
8.3.2.	UMTS HSUPA .....	23
8.3.3.	UMTS HSUPA OUTPUT POWER RESULT.....	24
8.3.4.	DC-HSDPA.....	25
8.3.1.	UMTS DC-HSDPA OUTPUT POWER RESULT .....	28
8.4.	LTE OUTPUT VERIFICATION.....	30
8.4.1.	LTE OUTPUT RESULT .....	30
<b>9.</b>	<b>PEAK TO AVERAGE RATIO.....</b>	<b>34</b>
9.1.	CONDUCTED PEAK TO AVERAGE RESULT.....	34
<b>10.</b>	<b>LIMITS AND CONDUCTED RESULTS.....</b>	<b>40</b>

---

10.1.	<i>OCCUPIED BANDWIDTH</i> .....	40
10.1.1.	OCCUPIED BANDWIDTH RESULTS.....	41
10.1.2.	LTE OCCUPIED BANDWIDTH RESULTS .....	42
10.1.3.	OCCUPIED BANDWIDTH PLOTS .....	45
10.2.	<i>BAND EDGE EMISSIONS</i> .....	51
10.2.1.	BAND EDGE PLOTS .....	52
10.2.2.	EMISSION MASK PLOTS .....	72
10.3.	<i>OUT OF BAND EMISSIONS</i> .....	76
10.3.1.	OUT OF BAND EMISSIONS RESULT .....	77
10.3.2.	OUT OF BAND EMISSIONS PLOTS.....	81
10.4.	<i>FREQUENCY STABILITY</i> .....	88
10.4.1.	FREQUENCY STABILITY RESULTS.....	89
<b>11.</b>	<b>RADIATED TEST RESULTS</b> .....	<b>92</b>
11.1.	<i>RADIATED POWER (ERP &amp; EIRP)</i> .....	92
11.1.1.	ERP/EIRP Results.....	92
11.1.2.	LTE ERP/EIRP Results .....	94
11.1.3.	ERP/EIRP DATA.....	97
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i> .....	121
11.2.1.	SPURIOUS RADIATION DATA.....	122
<b>12.</b>	<b>SETUP PHOTOS</b> .....	<b>146</b>

# 1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.  
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, ANT+ & NFC  
SERIAL NUMBER: G/U unit, L/GPS unit.  
DATE TESTED: JUNE 24<sup>TH</sup> – JULY 10<sup>TH</sup>, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E and 27M	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released

For UL Verification Services Inc. By:

Tested By:



PENG ZHANG  
CONSUMER TECHNOLOGY DIVISION

CHARLES VERGONIO  
CONSUMER TECHNOLOGY DIVISION

PROJECT LEAD  
UL Verification Services Inc.

LAB ENGINEER  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24, FCC CFR 47 Part 27.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input checked="" type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input checked="" type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{EIRP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$$

$$\text{ERP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$$

(Path loss = Signal generator output – PSA reading with substitution antenna)

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 40000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac + NFC & ANT+.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			Peak (dBm)	Peak(mW)	Peak (dBm)	Peak(mW)
GSM850	824~849	GMSK	33.1	2041.73		
	824~849	GPRS	33.1	2041.73	30.53	1129.79
	824~849	EGPRS	26.8	478.63	28.48	704.69
GSM1900	1850~1910	GMSK	30.3	1071.51		
	1850~1910	GPRS	30.3	1071.51	28.89	774.46
	1850~1910	EGPRS	25.7	371.53	26.01	399.02

FCC Part 22/27						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
Band 5	824~849	REL99	24.0	251.18	21.85	153.10
	824~849	HSDPA	23.9	245.47	21.82	152.05
	824~849	HSUPA	23.6	229.08		
Band 2	1850~1910	REL99	23.8	239.88	22.12	162.92
	1850~1910	HSDPA	23.3	213.79	21.86	153.46
	1850~1910	HSUPA	23.1	204.17		

### 5.3. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP/EIRP output powers as follows:

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Avg (dBm)	Avg(mW)	Avg (dBm)	Avg(mW)
LTE7	2500~2570	20MHz	QPSK	23.09	203.70	21.19	131.52
	2500~2570	20MHz	16QAM	22.16	164.43	20.16	103.73

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Avg (dBm)	Avg(mW)	Avg (dBm)	Avg(mW)
LTE7	2500~2570	15MHz	QPSK	23.30	213.79	21.07	127.93
	2500~2570	15MHz	16QAM	22.50	177.82	20.79	119.94

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Avg (dBm)	Avg(mW)	Avg (dBm)	Avg(mW)
LTE7	2500~2570	10MHz	QPSK	23.15	206.53	21.09	128.52
	2500~2570	10MHz	16QAM	22.06	160.69	20.30	107.15

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Avg (dBm)	Avg(mW)	Avg (dBm)	Avg(mW)
LTE7	2500~2570	5MHz	QPSK	23.24	210.86	21.38	137.40
	2500~2570	5MHz	16QAM	22.26	168.26	20.30	107.15

FCC Part 22							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Avg (dBm)	Avg(mW)	Avg (dBm)	Avg(mW)
LTE5	824~849	10MHz	QPSK	23.13	205.58	18.87	77.09
	824~849	10MHz	16QAM	22.29	169.43	17.83	60.67

FCC Part 22							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Avg (dBm)	Avg(mW)	Avg (dBm)	Avg(mW)
LTE5	824~849	5MHz	QPSK	23.24	210.86	18.58	72.11
	824~849	5MHz	16QAM	22.49	177.41	17.35	54.32

FCC Part 22							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Avg (dBm)	Avg(mW)	Avg (dBm)	Avg(mW)
LTE5	824~849	3MHz	QPSK	23.10	204.17	18.60	72.44
	824~849	3MHz	16QAM	21.96	157.03	16.18	41.49

FCC Part 22							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Avg (dBm)	Avg(mW)	Avg (dBm)	Avg(mW)
LTE5	824~849	1.4MHz	QPSK	23.16	207.01	18.64	73.11
	824~849	1.4MHz	16QAM	22.23	167.10	17.74	59.42

#### 5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
LTE5, 824~849MHz	-4.1
LTE7, 2500~2570MHz	-1.7
Band 2, 1850~1910MHz	-2.4

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SONY	EP880	3514W 01 S08328	N/A
Earphone	SONY	MH410C	N/A	N/A

### I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


### I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes


### TEST SETUP

The EUT is continuously communicated to the call box during the tests.

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

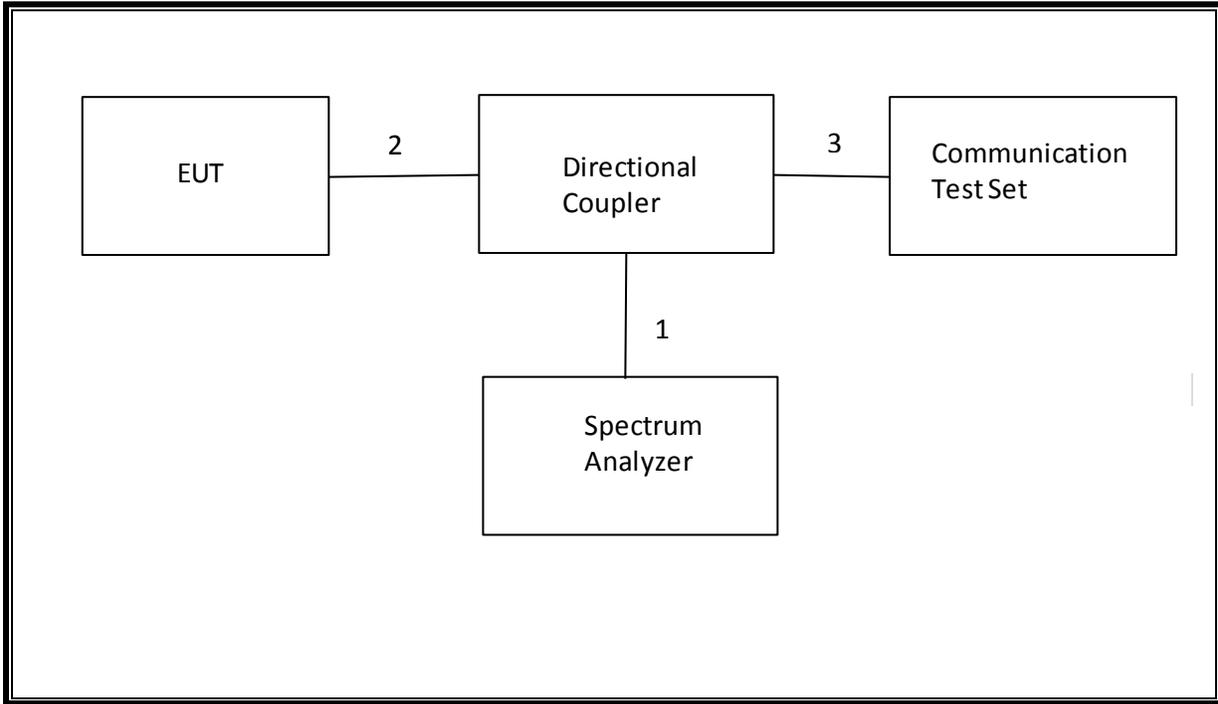

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

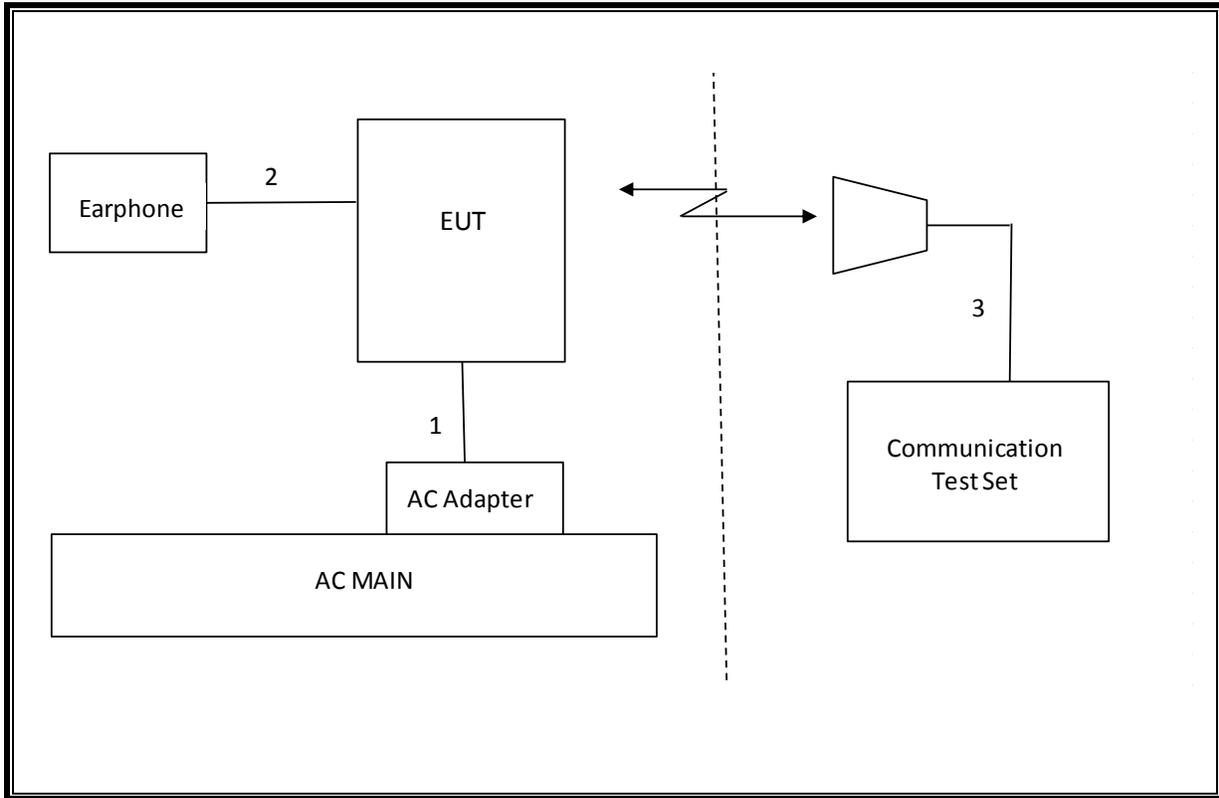

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	08/14/14
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/14
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/15
Communications Test Set	R&S	CMW500	T159	07/02/15
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/15
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/15
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/14
Antenna, Horn, 18- 26 GHz	ARA	MWH-1826/B	C00947	11/12/14

## 7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst case
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	17.8253MHz
22.917(a) 24.238(a) 27.53(g) 90.691	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-16.53dBm
27.53(m)	RSS-199(4.5)		-25dBm		Pass	-25.05dBm
2.1046	N/A	Conducted output power	N/A		Pass	33.1dBm
27.53(m) 90.691	RSS-199(4.5)	Emission Mask			Pass	
22.355 24.235 27.54 90.213	RSS-132(4.3) RSS-133(6.3) RSS-139(6.3) RSS-199(4.3)	Frequency Stability	2.5PPM		Pass	0.099PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	30.53dBm
24.232(c ) 27.50(h)(2)	RSS-133(6.4) RSS-199(4.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	28.89dBm
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-35.5dBm
27.53(m)	RSS-199(4.5)		-25dBm		Pass	-32.8dBm

## 8. RF POWER OUTPUT VERIFICATION

### 8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900  
Press Connection control to choose the different menus  
Press RESET > choose all to reset all settings  
Connection Press Signal Off to turn off the signal and change settings  
Network Support > GSM+GPRS or GSM+EGPRS  
Main Service > Packet Data  
Service selection > Test Mode A – Auto Slot Config. off  
MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting  
    > Slot configuration > Uplink/Gamma  
    > 33 dBm for GPRS 850/900  
    > 30 dBm for GPRS1800/1900  
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel  
Frequency Offset > + 0 Hz  
Mode > BCCH and TCH  
BCCH Level > -85 dBm (May need to adjust if link is not stable)  
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]  
Channel Type > Off  
P0> 4 dB  
Slot Config > Unchanged (if already set under MS Signal)  
TCH > choose desired test channel  
Hopping > Off  
Main Timeslot > 3 (Default)  
Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)  
    Bit Stream > 2E9-1PSR Bit Pattern  
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input  
Connection Press Signal On to turn on the signal and change settings

**8.1.1. GSM OUTPUT POWER RESULT**

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)
GSM (Voice)	CS1	1	128	824.2	33.1
			190	836.6	33.0
			251	848.8	33.0
GPRS (GMSK)	CS1	1	128	824.2	33.1
			190	836.6	33.0
			251	848.8	33.0
		2	128	824.2	29.6
			190	836.6	29.6
			251	848.8	29.6
		3	128	824.2	27.6
			190	836.6	27.6
			251	848.8	27.6
		4	128	824.2	26.5
			190	836.6	26.6
			251	848.8	26.7
EGPRS (8PSK)	MCS5	1	128	824.2	26.7
			190	836.6	26.8
			251	848.8	26.8
		2	128	824.2	24.8
			190	836.6	24.9
			251	848.8	24.9
		3	128	824.2	24.0
			190	836.6	24.1
			251	848.8	24.1
		4	128	824.2	21.9
			190	836.6	21.9
			251	848.8	22.0

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)
GSM (Voice)	CS1	1	512	1850.2	30.3
			661	1880.0	30.3
			810	1909.8	30.3
GPRS (GMSK)	CS1	1	512	1850.2	30.3
			661	1880.0	30.3
			810	1909.8	30.3
		2	512	1850.2	28.3
			661	1880.0	28.2
			810	1909.8	28.3
		3	512	1850.2	27.2
			661	1880.0	27.2
			810	1909.8	27.3
		4	512	1850.2	26.4
			661	1880.0	26.3
			810	1909.8	26.4
EGPRS (8PSK)	MCS5	1	512	1850.2	25.7
			661	1880.0	25.7
			810	1909.8	25.7
		2	512	1850.2	24.1
			661	1880.0	24.1
			810	1909.8	24.1
		3	512	1850.2	23.0
			661	1880.0	23.0
			810	1909.8	23.0
		4	512	1850.2	21.9
			661	1880.0	21.9
			810	1909.8	22.0

## 8.2. UMTS REL 99

### TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	$\beta_c$	Not Applicable
	$\beta_d$	Not Applicable
	$\beta_{ec}$	Not Applicable
	$\beta_c/\beta_d$	8/15
	$\beta_{hs}$	Not Applicable
	$\beta_{ed}$	Not Applicable

### 8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	0	23.8
		9400	1880.0	0	23.8
		9538	1907.6	0	23.8

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	0	23.9
		4183	836.6	0	23.7
		4233	846.6	0	23.9

### 8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	$\beta_c$	2/15	12/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	$\beta_c/\beta_d$	2/15	12/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	$D_{ACK}$	8			
	$D_{NAK}$	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

#### 8.3.1. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	23.3
		9400	1880.0	0	23.3
		9538	1907.6	0	23.2
	Subtest 2	9262	1852.4	0	23.4
		9400	1880.0	0	23.3
		9538	1907.6	0	23.2
	Subtest 3	9262	1852.4	0.5	23.3
		9400	1880.0	0.5	23.3
		9538	1907.6	0.5	22.7
	Subtest 4	9262	1852.4	0.5	23.3
		9400	1880.0	0.5	23.3
		9538	1907.6	0.5	22.7

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	24.0
		4183	836.6	0	23.8
		4233	846.6	0	23.9
	Subtest 2	4132	826.4	0	24.0
		4183	836.6	0	23.8
		4233	846.6	0	23.9
	Subtest 3	4132	826.4	0.5	23.5
		4183	836.6	0.5	23.3
		4233	846.6	0.5	23.5
	Subtest 4	4132	826.4	0.5	23.5
		4183	836.6	0.5	23.3
		4233	846.6	0.5	23.5

### 8.3.2. UMTS HSUPA

#### TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
$\beta_{ed}$ (note1)	1309/225	94/75	47/15 47/15	56/75	134/15	
MPR	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = $\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

Note1:  $\beta_{ed}$  cannot be set directly, it is set by Absolute Grant Value.

**8.3.3. UMTS HSUPA OUTPUT POWER RESULT**

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	22.9
		9400	1880.0	0	23.1
		9538	1907.6	0	22.8
	Subtest 2	9262	1852.4	2	21.7
		9400	1880.0	2	21.7
		9538	1907.6	2	21.8
	Subtest 3	9262	1852.4	1	22.8
		9400	1880.0	1	22.4
		9538	1907.6	1	22.3
	Subtest 4	9262	1852.4	2	21.4
		9400	1880.0	2	21.8
		9538	1907.6	2	21.8
	Subtest 5	9262	1852.4	0	23.4
		9400	1880.0	0	23.4
		9538	1907.6	0	23.2

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	23.3
		4183	836.6	0	23.6
		4233	846.6	0	23.3
	Subtest 2	4132	826.4	2	22.1
		4183	836.6	2	22.3
		4233	846.6	2	22.0
	Subtest 3	4132	826.4	1	22.4
		4183	836.6	1	22.5
		4233	846.6	1	22.9
	Subtest 4	4132	826.4	2	22.3
		4183	836.6	2	22.4
		4233	846.6	2	22.2
	Subtest 5	4132	826.4	0	24.0
		4183	836.6	0	23.8
		4233	846.6	0	24.0

### 8.3.4. DC-HSDPA

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

**Table E.5.0: Levels for HSDPA connection setup**


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

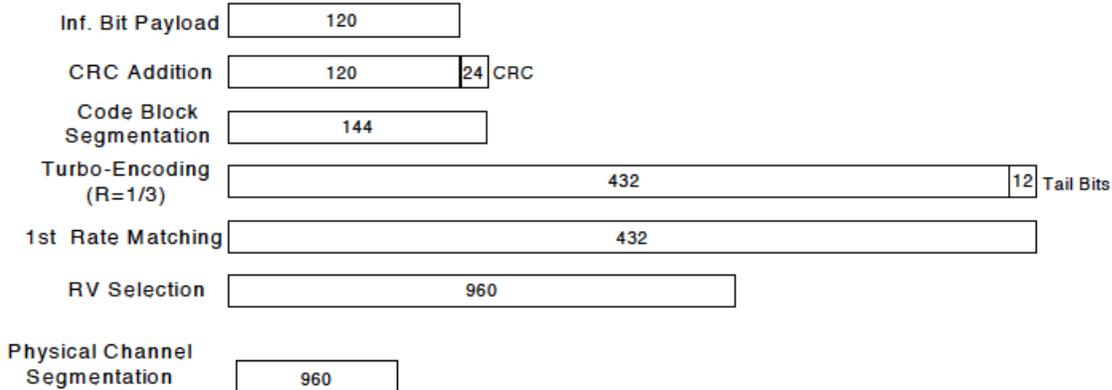

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	$\beta_c$	2/15	12/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	$\beta_d$ (SF)	64			
$\beta_c/\beta_d$	2/15	12/15	15/8	15/4	

	$\beta_{hs}$	4/15	24/15	30/15	30/15
	MPR	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

Up commands are set continuously to set the UE to Max power.

**8.3.1. UMTS DC-HSDPA OUTPUT POWER RESULT**

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	23.3
		9400	1880.0	0	23.4
		9538	1907.6	0	23.2
	Subtest 2	9262	1852.4	0	23.4
		9400	1880.0	0	23.4
		9538	1907.6	0	23.2
	Subtest 3	9262	1852.4	0.5	23.2
		9400	1880.0	0.5	23.3
		9538	1907.6	0.5	22.9
	Subtest 4	9262	1852.4	0.5	23.3
		9400	1880.0	0.5	23.3
		9538	1907.6	0.5	22.9

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	24.0
		4183	836.6	0	23.7
		4233	846.6	0	23.9
	Subtest 2	4132	826.4	0	24.0
		4183	836.6	0	23.7
		4233	846.6	0	24.0
	Subtest 3	4132	826.4	0.5	23.5
		4183	836.6	0.5	23.2
		4233	846.6	0.5	23.5
	Subtest 4	4132	826.4	0.5	23.5
		4183	836.6	0.5	23.3
		4233	846.6	0.5	23.5

## 8.4. LTE OUTPUT VERIFICATION

### 8.4.1. LTE OUTPUT RESULT

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20450	20525	20600
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	22.95	23.13	23.05
			1	25	0	22.90	23.08	23.00
			1	49	0	23.04	23.12	23.02
			25	0	1	21.99	22.19	22.13
			25	12	1	22.08	22.12	22.11
			25	25	1	22.13	22.10	22.15
			50	0	1	22.17	22.18	22.16
		16QAM	1	0	1	21.88	22.29	21.95
			1	25	1	21.82	22.29	21.88
			1	49	1	21.91	22.30	21.89
			25	0	2	21.01	21.17	21.22
			25	12	2	21.10	21.18	21.20
			25	25	2	21.11	21.16	21.18
			50	0	2	21.09	21.13	21.13
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20425	20525	20625
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	22.97	23.24	23.18
			1	12	0	22.92	23.20	23.16
			1	24	0	22.96	23.23	23.17
			12	0	1	22.02	22.18	22.15
			12	7	1	22.06	22.11	22.08
			12	13	1	22.06	22.15	22.14
			25	0	1	22.07	22.15	22.10
		16QAM	1	0	1	21.80	22.11	22.49
			1	12	1	21.82	22.07	22.40
			1	24	1	21.86	22.10	22.42
			12	0	2	21.06	21.16	21.10
			12	7	2	21.05	21.12	21.14
			12	13	2	21.05	21.14	21.13
			25	0	2	21.05	21.16	21.08
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20415	20525	20635
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	23.01	23.10	23.06
			1	8	0	22.89	23.04	22.97
			1	14	0	22.97	23.08	23.01

			8	0	1	22.08	22.19	22.15
			8	4	1	22.05	22.13	22.08
			8	7	1	21.99	22.15	22.12
			15	0	1	22.08	22.13	22.12
		16QAM	1	0	1	21.90	21.96	21.95
			1	8	1	21.81	21.88	21.90
			1	14	1	21.87	21.90	21.94
			8	0	2	21.05	21.21	21.16
			8	4	2	21.04	21.20	21.12
			8	7	2	21.03	21.21	21.09
			15	0	2	21.07	21.08	21.10
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20407	20525	20643
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	23.04	23.16	23.08
			1	3	0	22.98	23.09	23.03
			1	5	0	23.05	23.13	23.11
			3	0	0	23.08	23.22	23.12
			3	1	0	23.04	23.17	23.06
			3	3	0	22.99	23.19	23.11
			6	0	1	22.12	22.18	22.15
		16QAM	1	0	1	22.17	22.00	22.23
			1	3	1	22.10	21.98	22.14
			1	5	1	22.17	22.06	22.18
			3	0	1	22.04	22.34	22.05
			3	1	1	21.99	22.31	22.05
			3	3	1	21.99	22.30	22.04
			6	0	2	21.11	21.24	21.19

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20850	21100	21350
						2510 MHz	2535 MHz	2560 MHz
LTE Band 7	20	QPSK	1	0	0	23.04	23.06	23.09
			1	49	0	22.90	23.15	23.11
			1	99	0	23.03	23.05	22.64
			50	0	1	21.95	22.12	22.21
			50	24	1	21.99	22.04	22.10
			50	50	1	21.97	22.06	22.14
		16QAM	100	0	1	21.93	22.08	22.16
			1	0	1	22.19	22.06	22.29
			1	49	1	22.07	22.14	22.19
			1	99	1	22.16	22.03	22.12
			50	0	2	20.98	21.15	21.14
			50	24	2	20.96	21.09	21.01
			50	50	2	20.96	21.12	21.07
			100	0	2	20.96	21.07	21.10
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20825	21100	21375
						2507.5 MHz	2535 MHz	2562.5 MHz
LTE Band 7	15	QPSK	1	0	0	23.00	22.98	23.30
			1	37	0	22.78	23.14	23.01
			1	74	0	22.85	23.08	22.90
			36	0	1	21.86	22.15	22.16
			36	20	1	21.94	22.17	22.09
			36	39	1	21.97	22.08	22.18
		16QAM	75	0	1	21.94	22.17	22.16
			1	0	1	21.94	22.25	22.50
			1	37	1	21.70	22.33	22.39
			1	74	1	21.73	22.24	22.31
			36	0	2	20.78	21.20	21.01
			36	20	2	20.86	21.24	20.98
			36	39	2	20.88	21.14	21.11
			75	0	2	20.89	21.14	21.11
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20800	21100	21400
						2505 MHz	2535 MHz	2565 MHz
LTE Band 7	10	QPSK	1	0	0	23.11	23.07	23.15
			1	25	0	22.72	23.12	23.08
			1	49	0	22.84	23.04	23.01
			25	0	1	22.06	22.13	22.18
			25	12	1	21.88	22.18	22.18
			25	25	1	21.96	22.17	22.19
			50	0	1	21.98	22.13	22.24

		16QAM	1	0	1	22.05	21.93	22.06
			1	25	1	21.65	21.95	21.98
			1	49	1	21.82	21.86	22.00
			25	0	2	20.99	21.18	21.11
			25	12	2	20.84	21.27	21.15
			25	25	2	20.90	21.30	21.17
			50	0	2	20.98	21.10	21.12
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20775	21100	21425
						2502.5 MHz	2535 MHz	2567.5 MHz
LTE Band 7	5	QPSK	1	0	0	23.10	23.23	23.24
			1	12	0	22.86	23.30	23.19
			1	24	0	22.79	23.35	23.10
			12	0	1	22.15	22.24	22.29
			12	7	1	22.02	22.22	22.27
			12	13	1	22.02	22.23	22.22
			25	0	1	22.04	22.20	22.26
		16QAM	1	0	1	22.00	22.11	22.50
			1	12	1	21.76	22.16	22.48
			1	24	1	21.73	22.17	22.49
			12	0	2	21.13	21.31	21.17
			12	7	2	21.03	21.28	21.17
			12	13	2	21.02	21.26	21.23
			25	0	2	21.09	21.23	21.17

## 9. PEAK TO AVERAGE RATIO


### Test Procedure



Per KDB 971168 D01 Power Meas License Digital Systems v02r01



### Test Spec



In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.



### 9.1. CONDUCTED PEAK TO AVERAGE RESULT

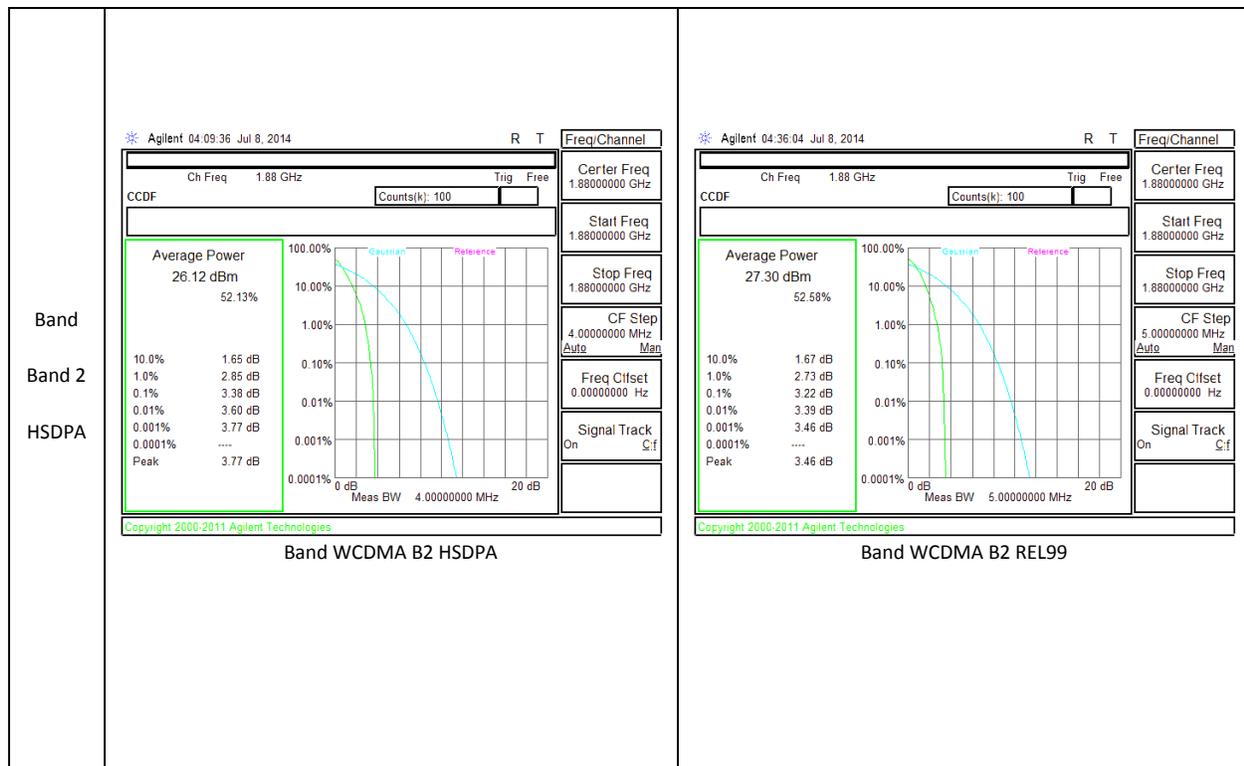


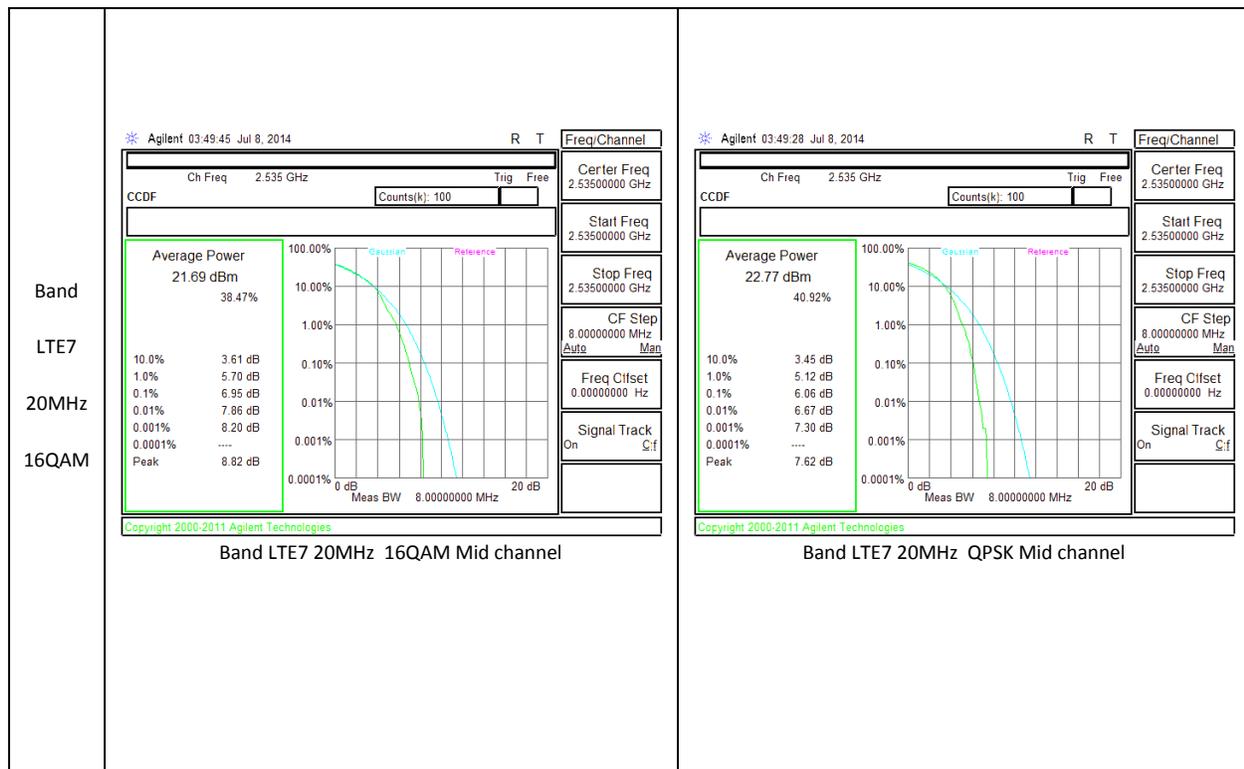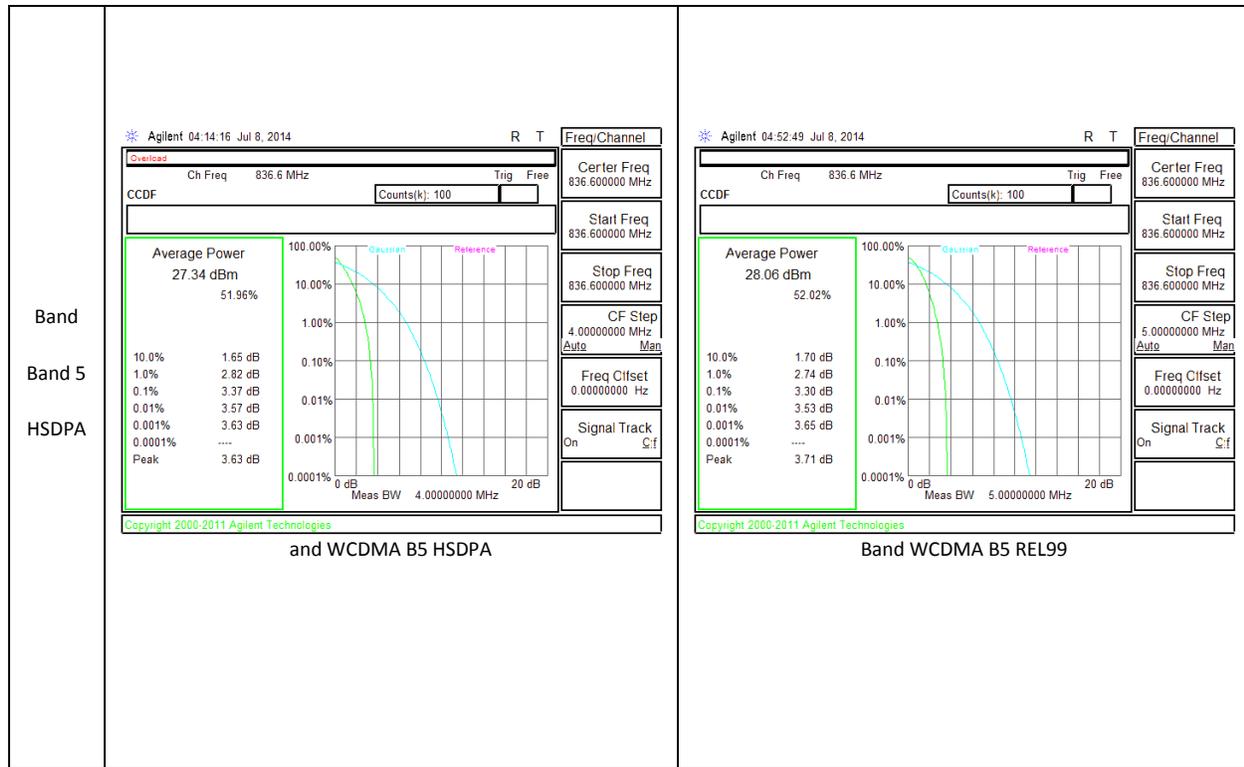

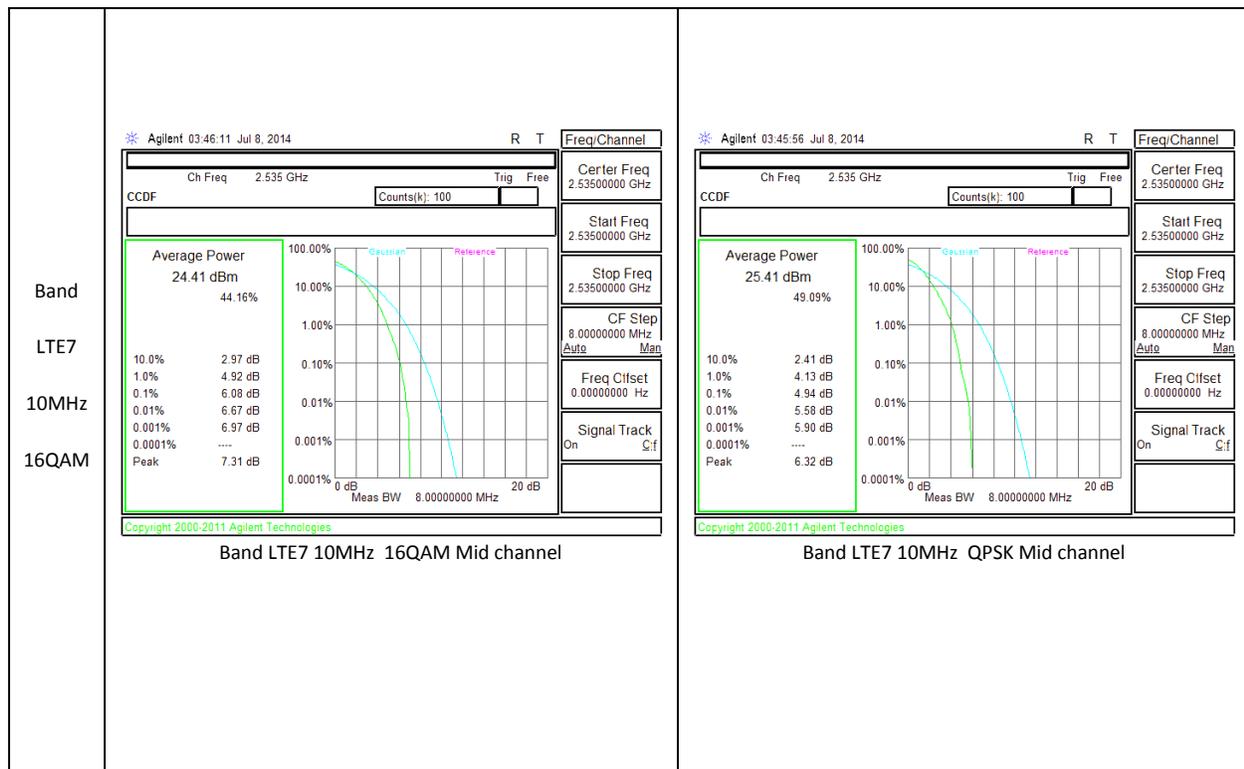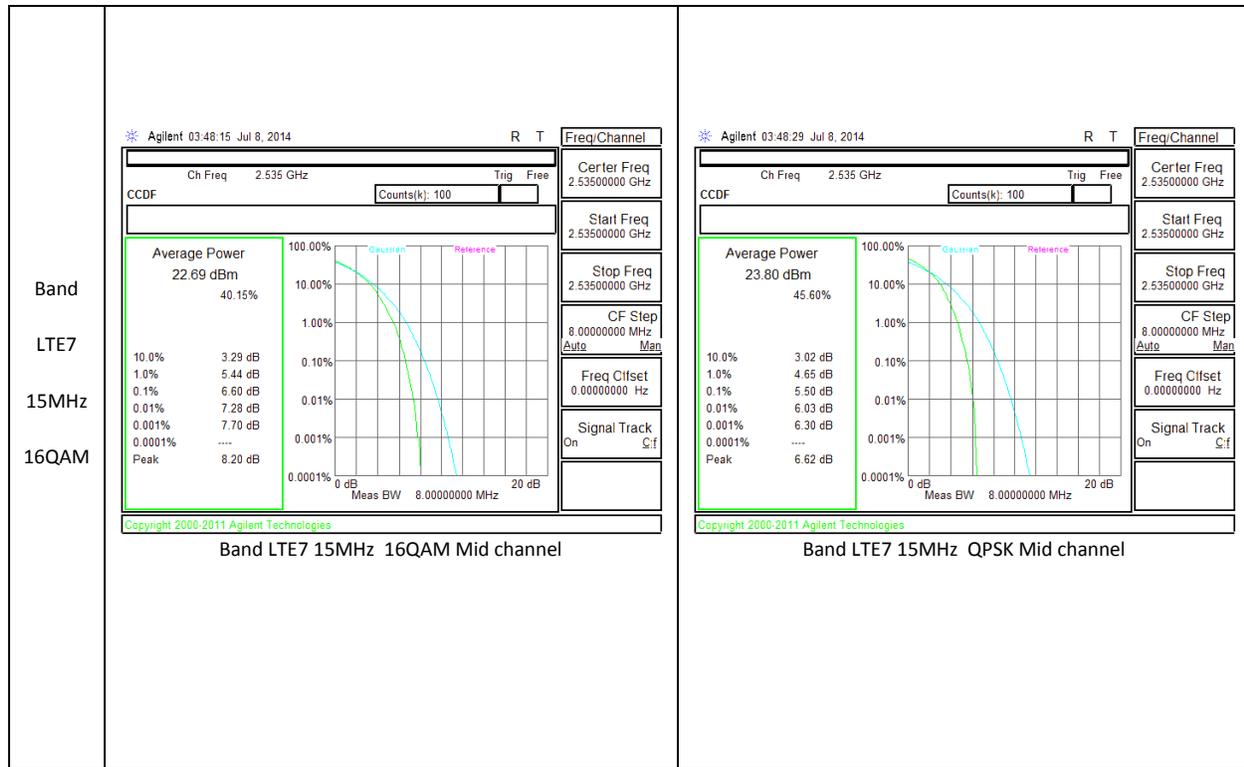

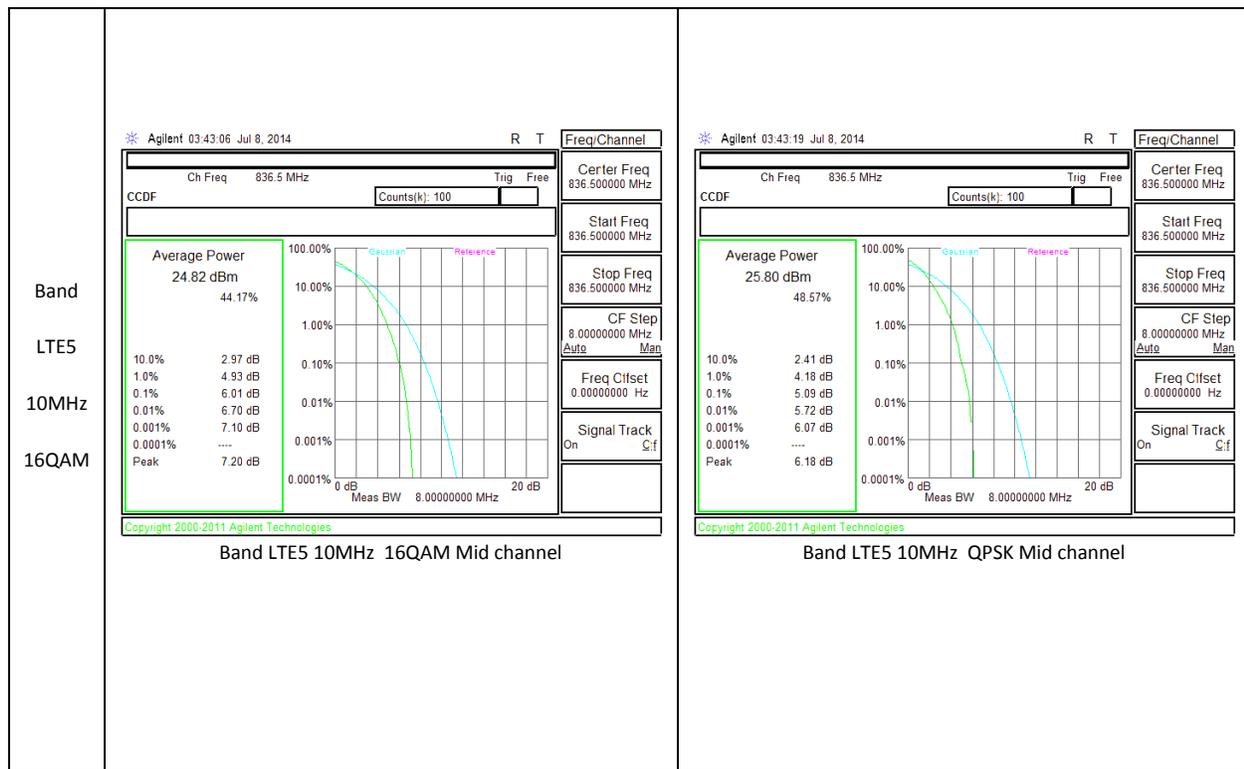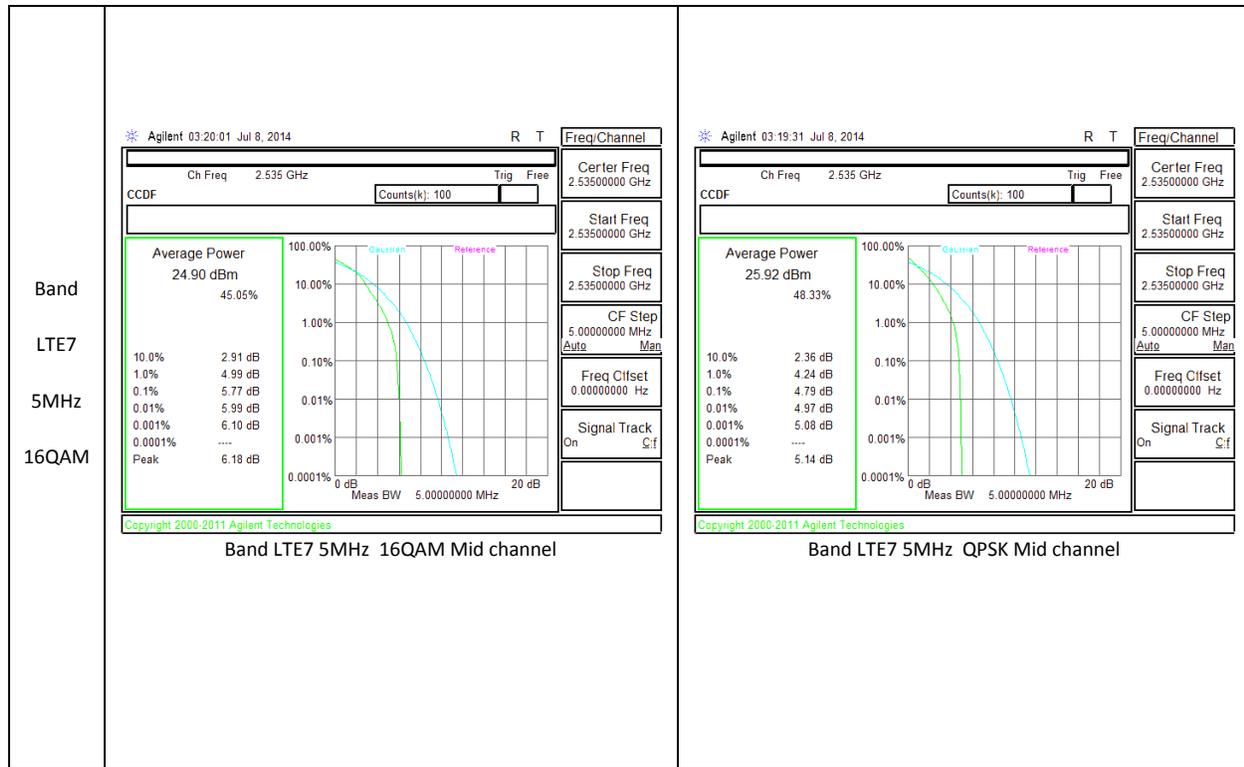

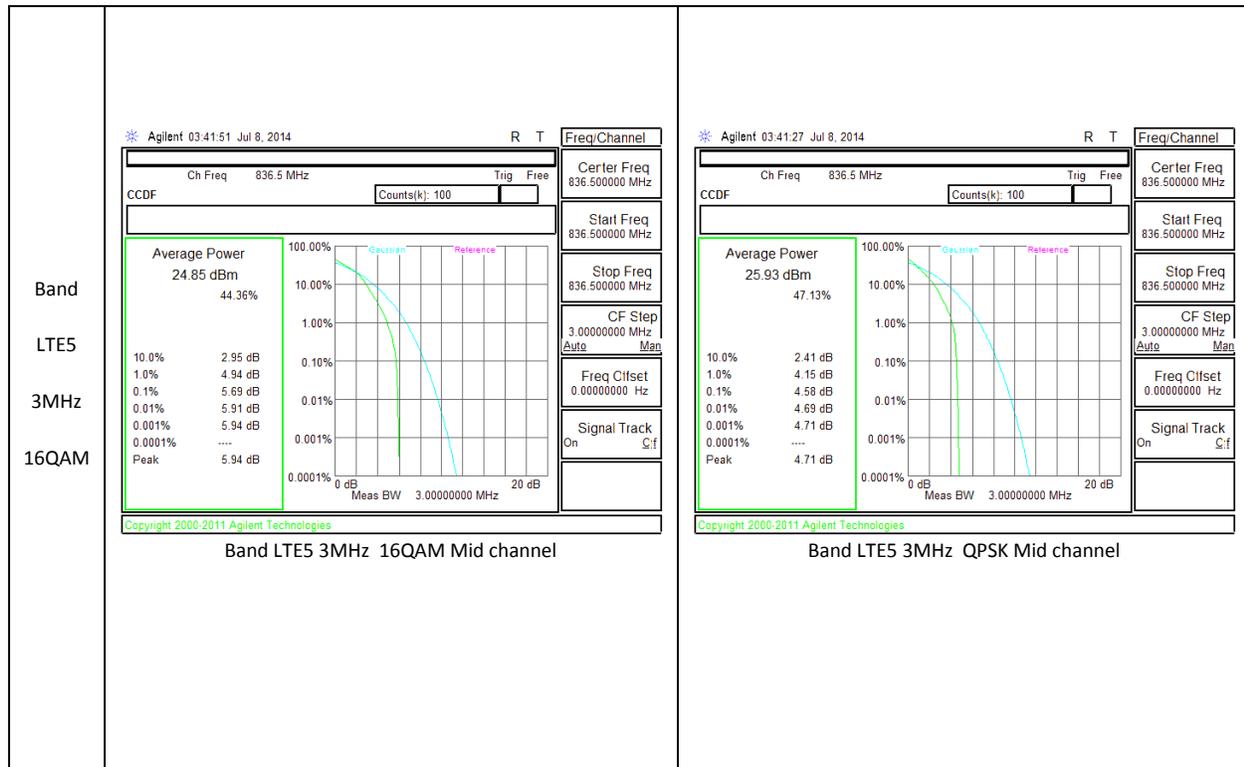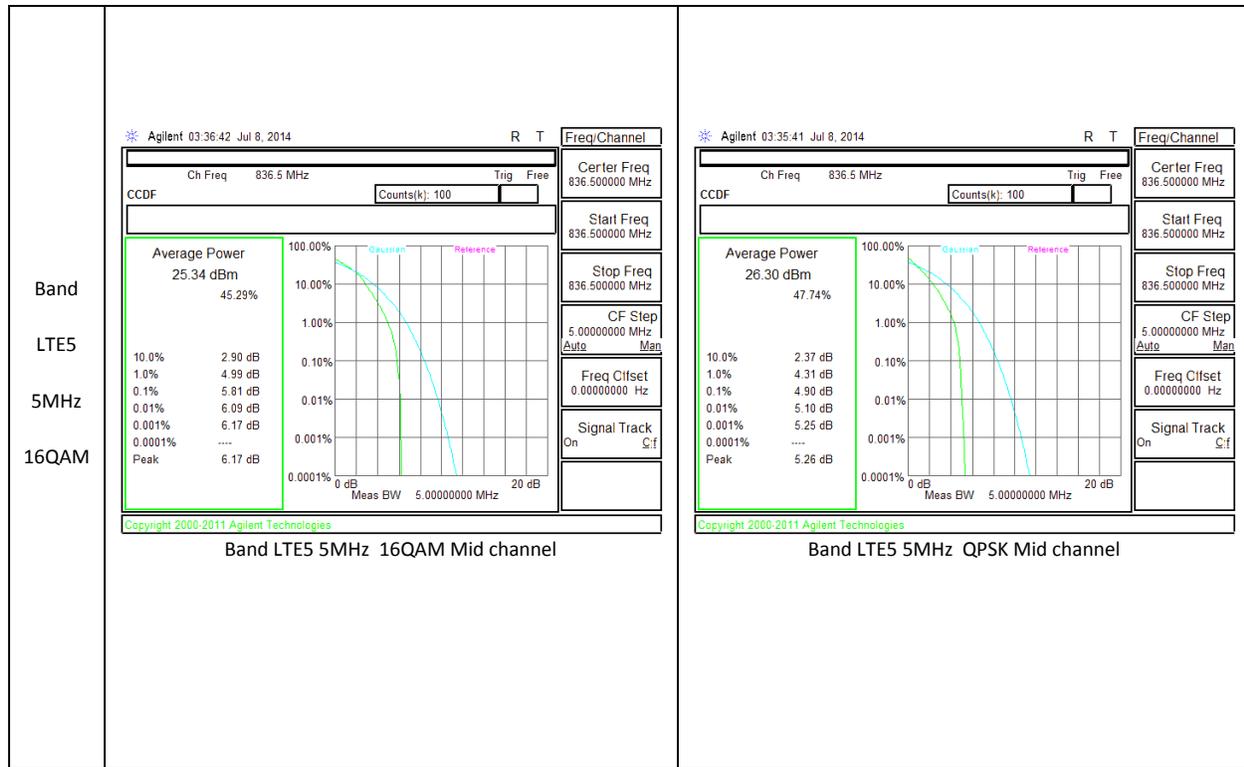

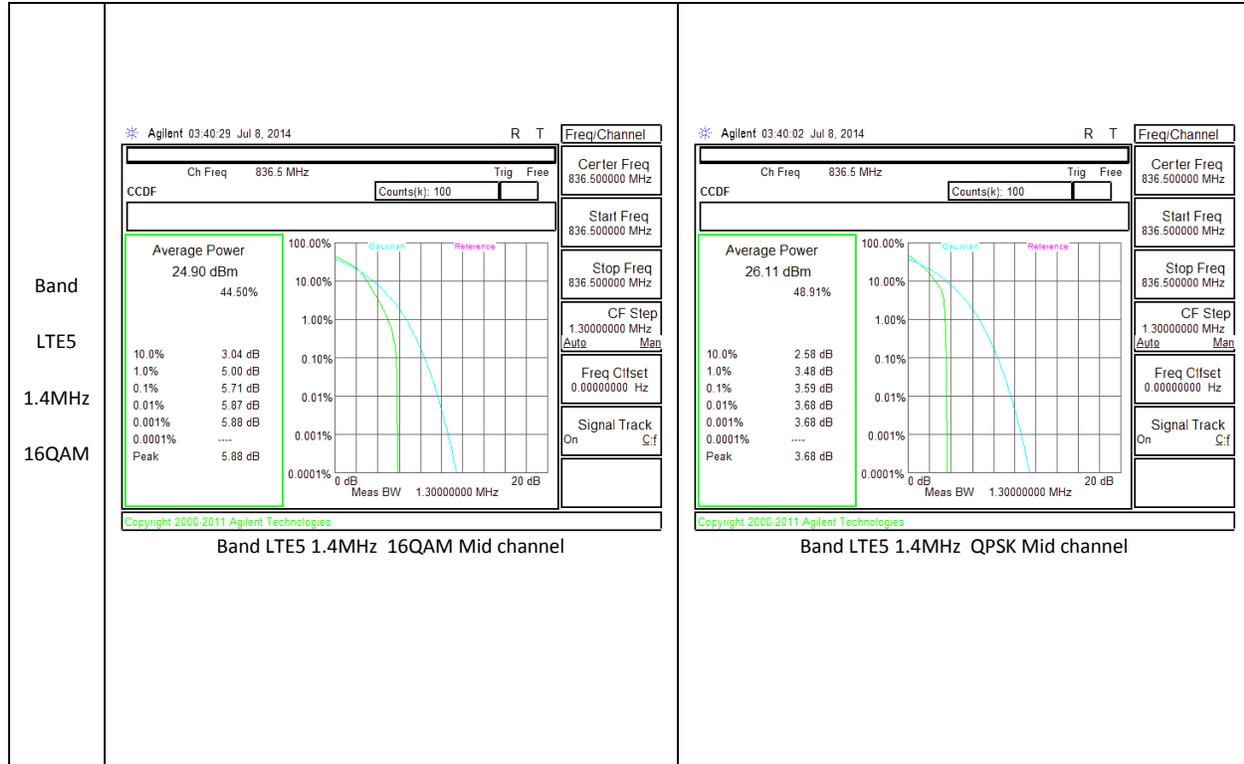

## 10. LIMITS AND CONDUCTED RESULTS

### 10.1. OCCUPIED BANDWIDTH

#### RULE PART(S)

FCC: §2.1049

IC: RSS-132, 4.5; RSS-133, 6.5

#### LIMITS

For reporting purposes only

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r01 - 06/07/2013)

**10.1.1. OCCUPIED BANDWIDTH RESULTS**

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GPRS	128	824.2	242.34	313.97
		190	836.6	244.51	315.05
		251	848.8	245.88	315.12
	EGPRS	128	824.2	243.80	303.40
		190	836.6	238.86	298.17
		251	848.8	241.73	285.76
GSM1900	GPRS	512	1850.2	244.55	311.88
		661	1880	245.25	317.61
		810	1909.8	244.21	310.66
	EGPRS	512	1850.2	240.82	312.71
		661	1880	244.73	305.00
		810	1909.8	239.66	313.81

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
Band 5	REL99	4132	826.4	4.1501	4.633
		4183	836.6	4.1611	4.636
		4233	846.6	4.1531	4.646
	HSDPA	4132	826.4	4.1623	4.623
		4183	836.6	4.1600	4.638
		4233	846.6	4.1518	4.630
Band 2	REL99	9262	1852.4	4.1473	4.627
		9400	1880	4.1614	4.633
		9538	1907.6	4.1594	4.627
	HSDPA	9262	1852.4	4.1675	4.636
		9400	1880	4.1501	4.639
		9538	1907.6	4.1521	4.634

**10.1.2. LTE OCCUPIED BANDWIDTH RESULTS**

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE7	20	QPSK	100/0	2510	17.8204	18.860
			100/0	2535	17.7876	18.828
			100/0	2560	17.7964	19.071
		16QAM	100/0	2510	17.7845	18.937
			100/0	2535	17.8192	19.068
			100/0	2560	17.8253	18.976

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE7	15	QPSK	75/0	2507.5	13.3809	14.452
			75/0	2535	13.3997	14.428
			75/0	2562.5	13.3535	14.397
		16QAM	75/0	2507.5	13.3555	14.393
			75/0	2535	13.3829	14.432
			75/0	2562.5	13.3720	14.208

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE7	10	QPSK	50/0	2505	8.9223	9.686
			50/0	2535	8.9480	9.626
			50/0	2565	8.9395	9.654
		16QAM	50/0	2505	8.9503	9.662
			50/0	2535	8.9619	9.678
			50/0	2565	8.9444	9.680

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE7	5	QPSK	25/0	2502.5	4.4575	4.845
			25/0	2535	4.4565	4.873
			25/0	2567.5	4.4621	4.907
		16QAM	25/0	2502.5	4.4681	4.864
			25/0	2535	4.4818	4.916
			25/0	2567.5	4.4638	4.927

Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	10	QPSK	50/0	829	8.9393	9.682
			50/0	836.5	8.9370	9.856
			50/0	844	8.9526	9.665
		16QAM	50/0	829	8.9387	9.654
			50/0	836.5	8.9466	9.697
			50/0	844	8.9439	9.708


Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	5	QPSK	25/0	826.5	4.4614	4.891
			25/0	836.5	4.4635	4.785
			25/0	846.5	4.4663	4.896
		16QAM	25/0	826.5	4.4639	4.870
			25/0	836.5	4.4609	4.783
			25/0	846.5	4.4635	4.814



Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	3	QPSK	15/0	825.5	2.6919	2.925
			15/0	836.5	2.6831	2.928
			15/0	847.5	2.6771	2.888
		16QAM	15/0	825.5	2.6719	2.889
			15/0	836.5	2.6829	2.929


			15/0	847.5	2.6764	2.905
--	--	--	------	-------	--------	-------



Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	1.4	QPSK	6/0	824.7	1.0818	1.244
			6/0	836.5	1.0783	1.240
			6/0	848.3	1.0775	1.244
		16QAM	6/0	824.7	1.0793	1.234
			6/0	836.5	1.0803	1.251
			6/0	848.3	1.0762	1.257



**10.1.3. OCCUPIED BANDWIDTH PLOTS**

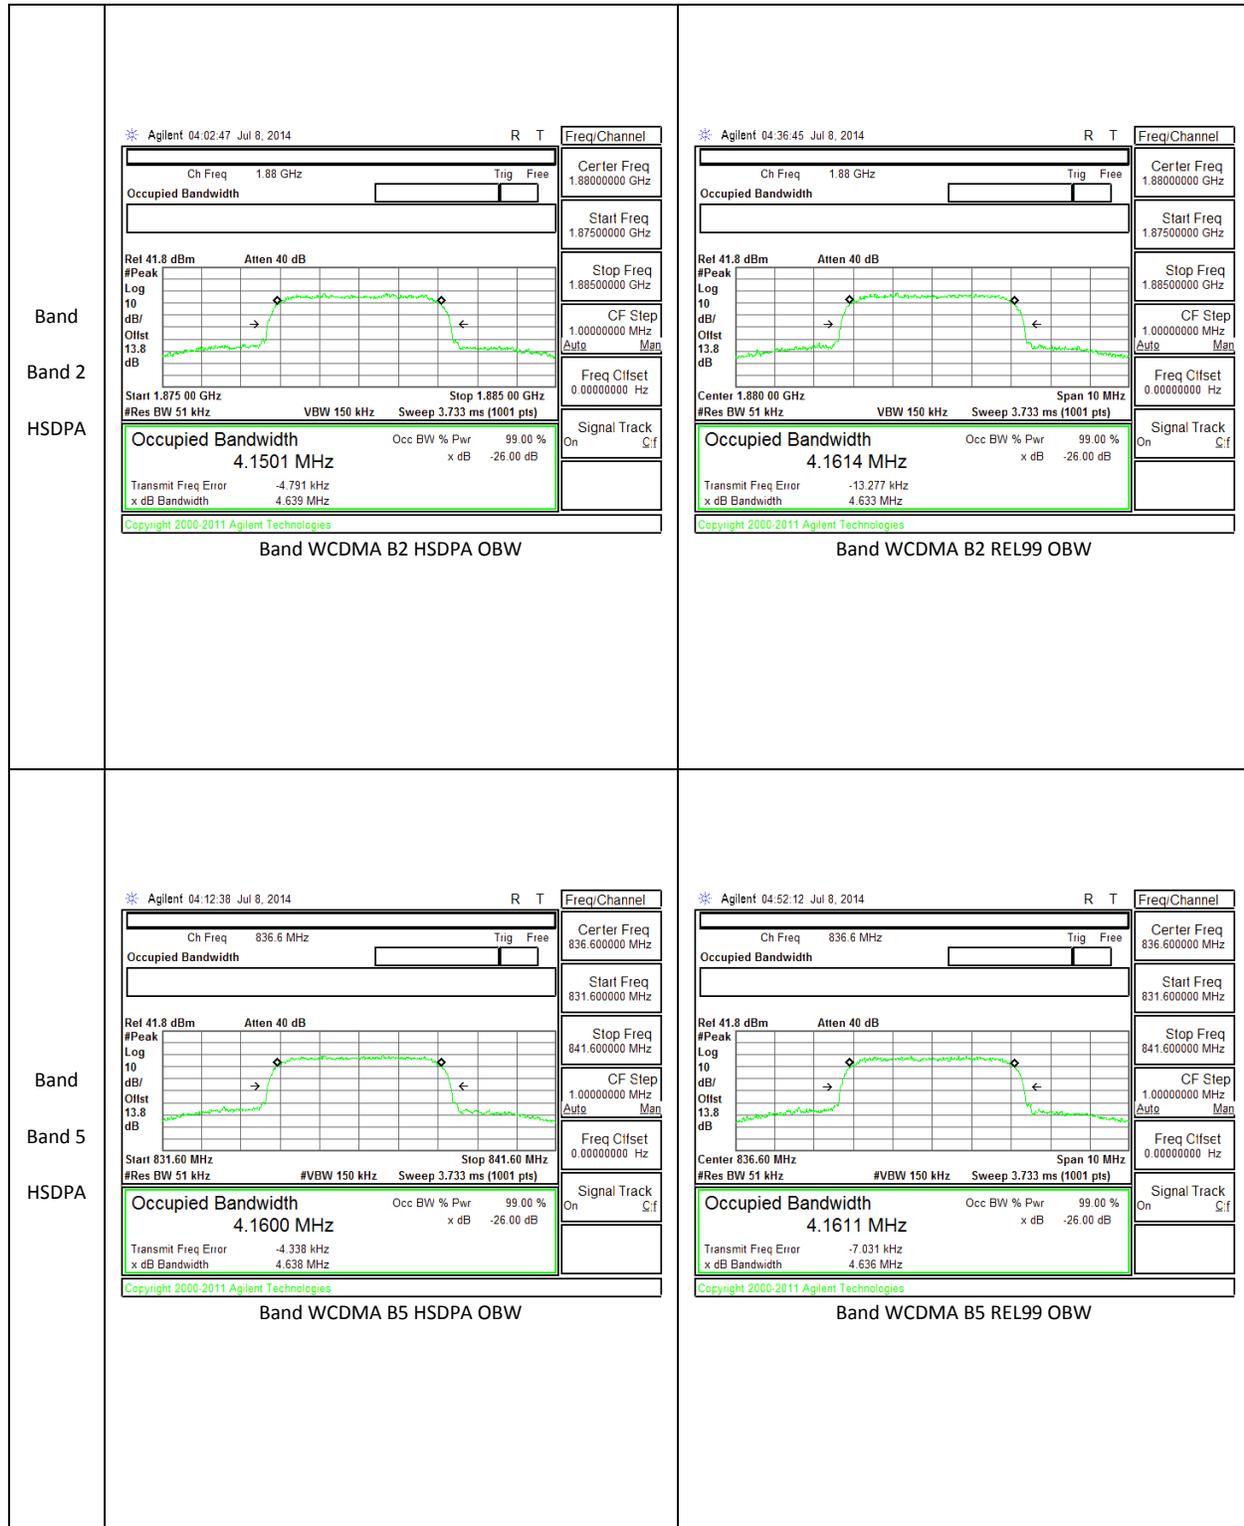


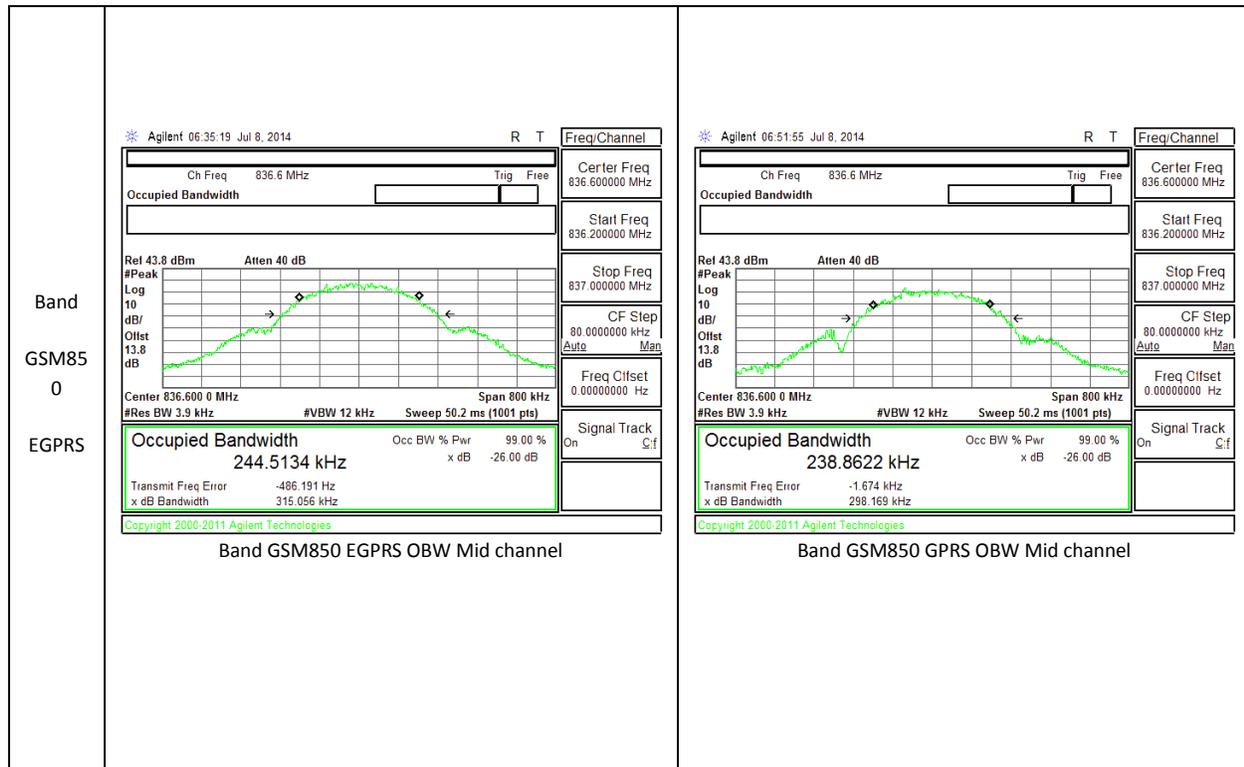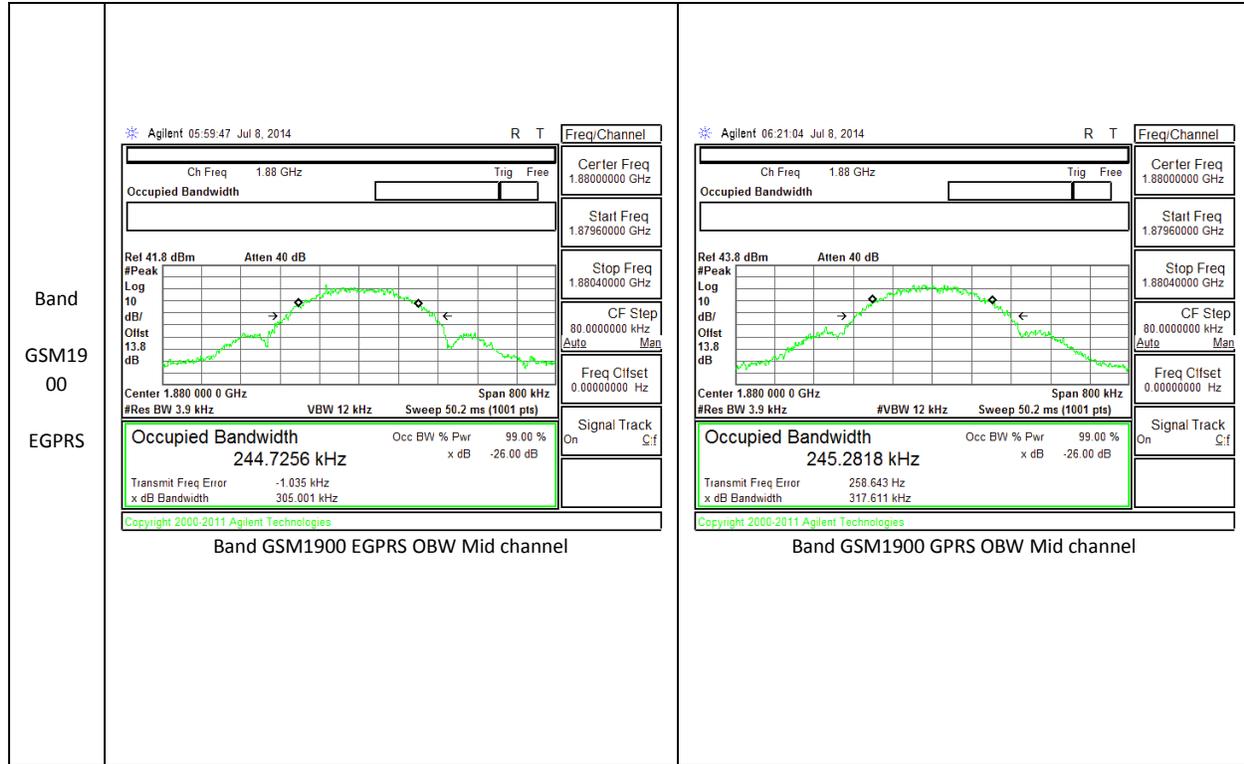

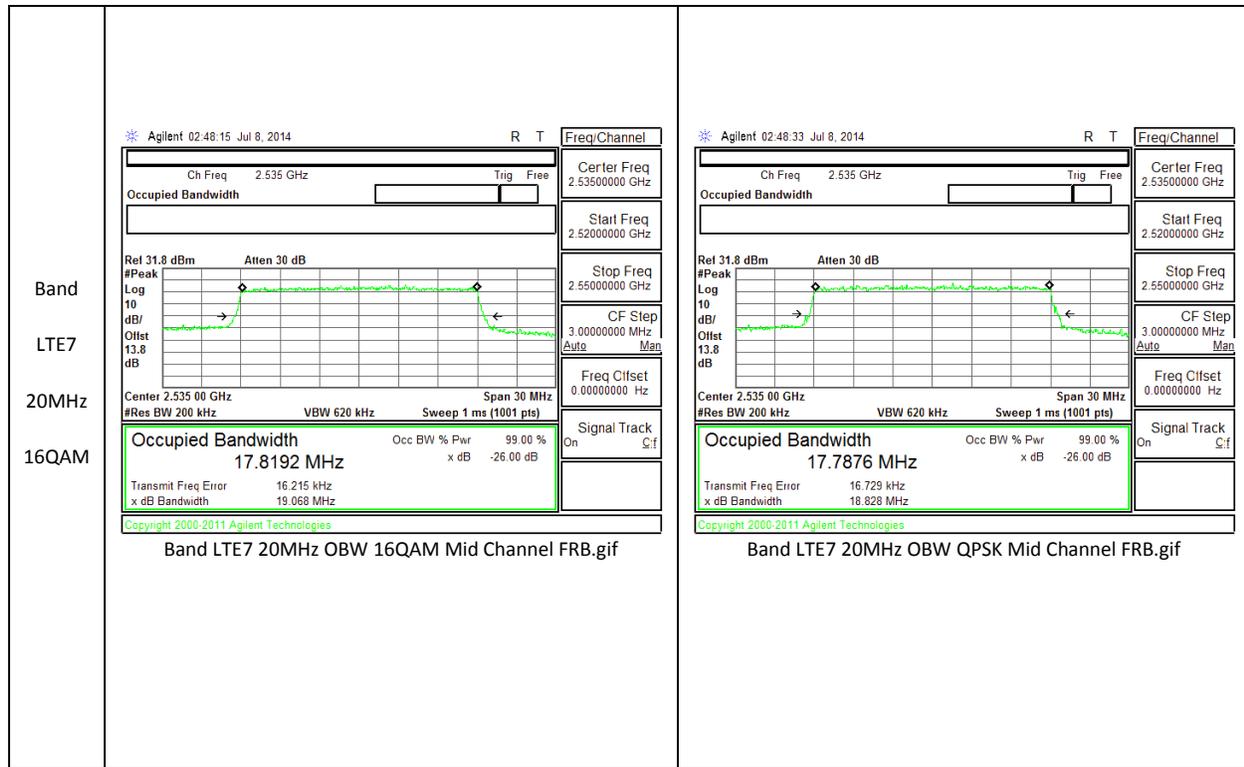

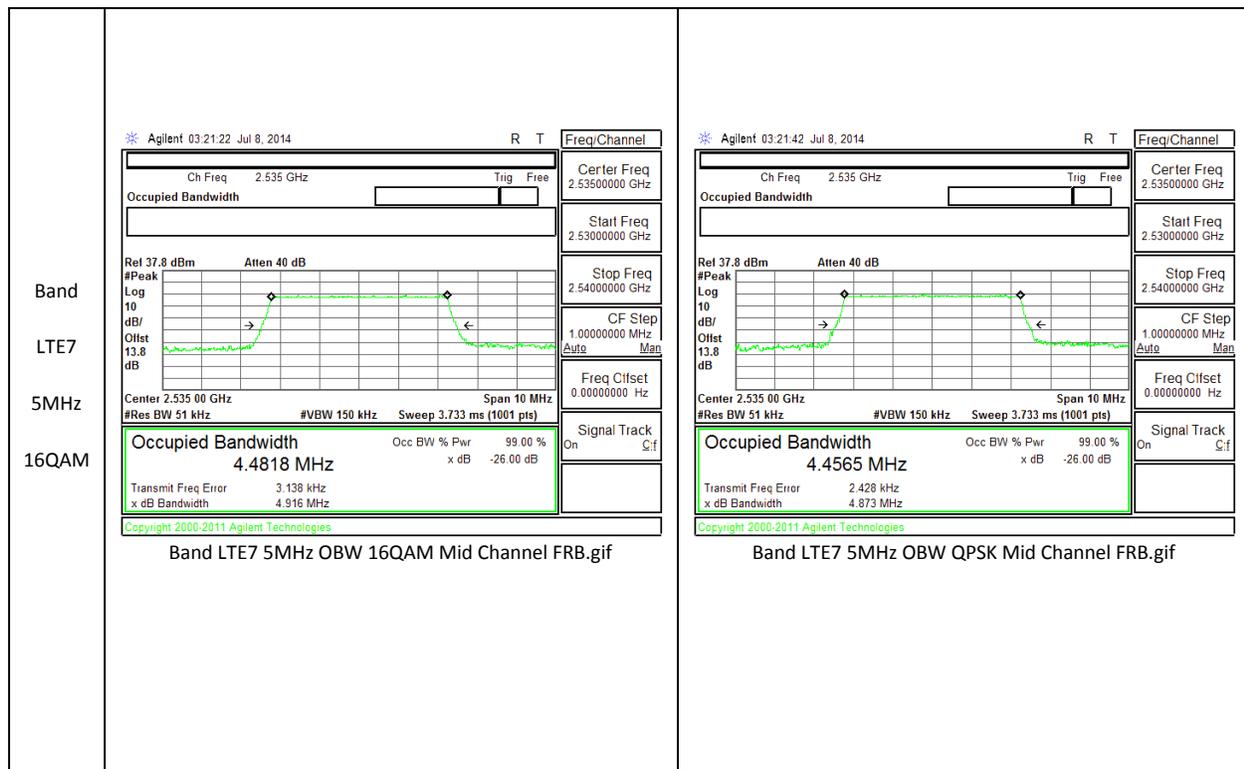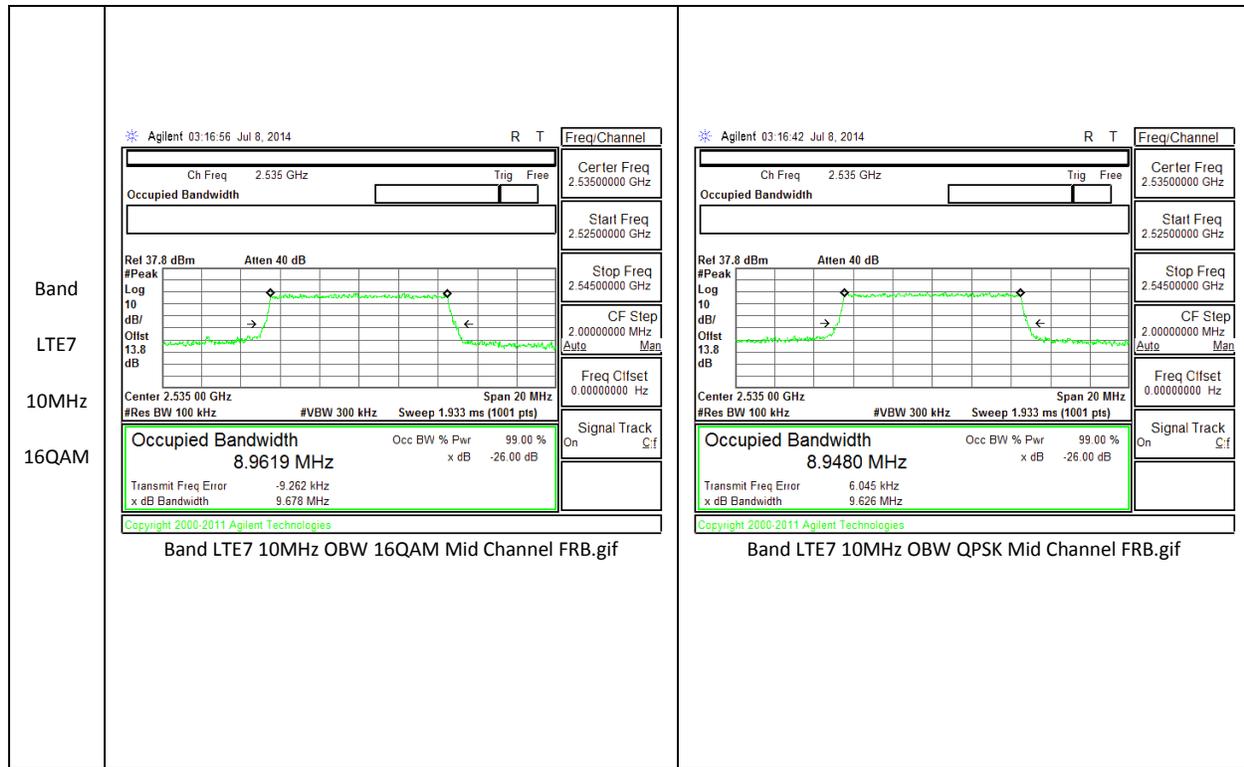


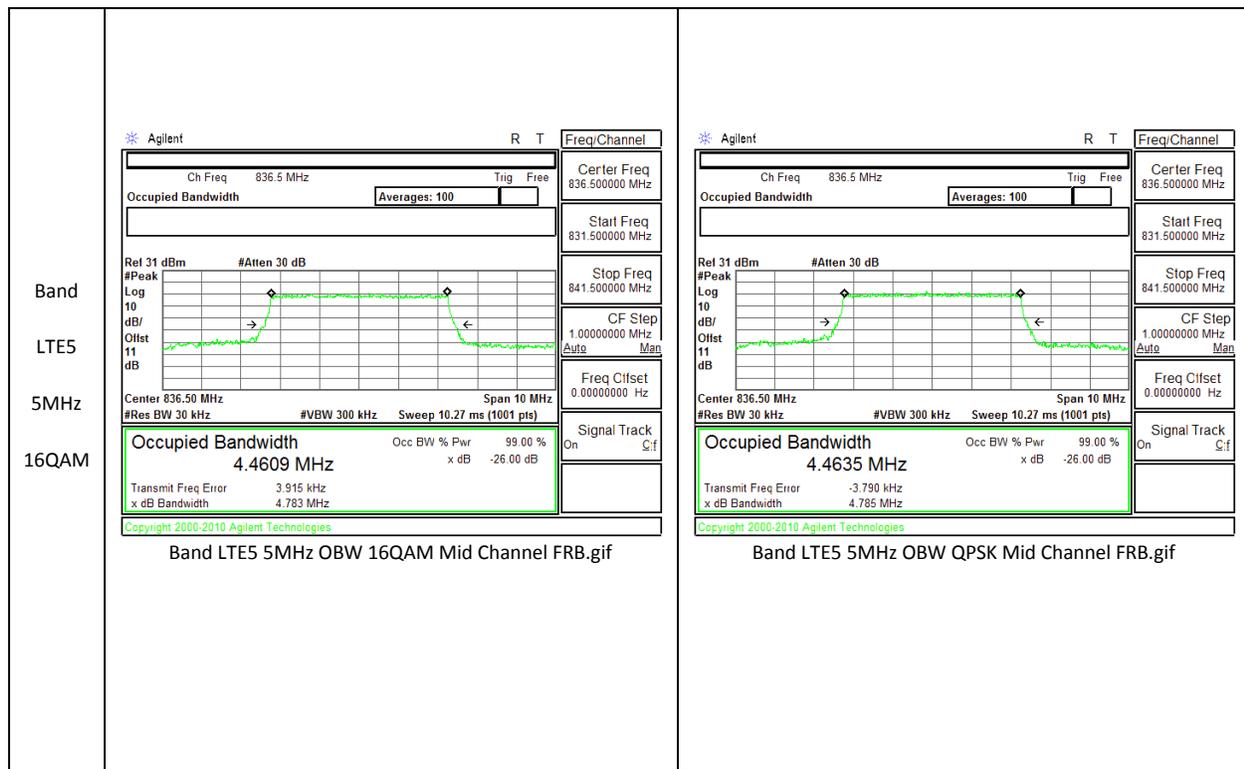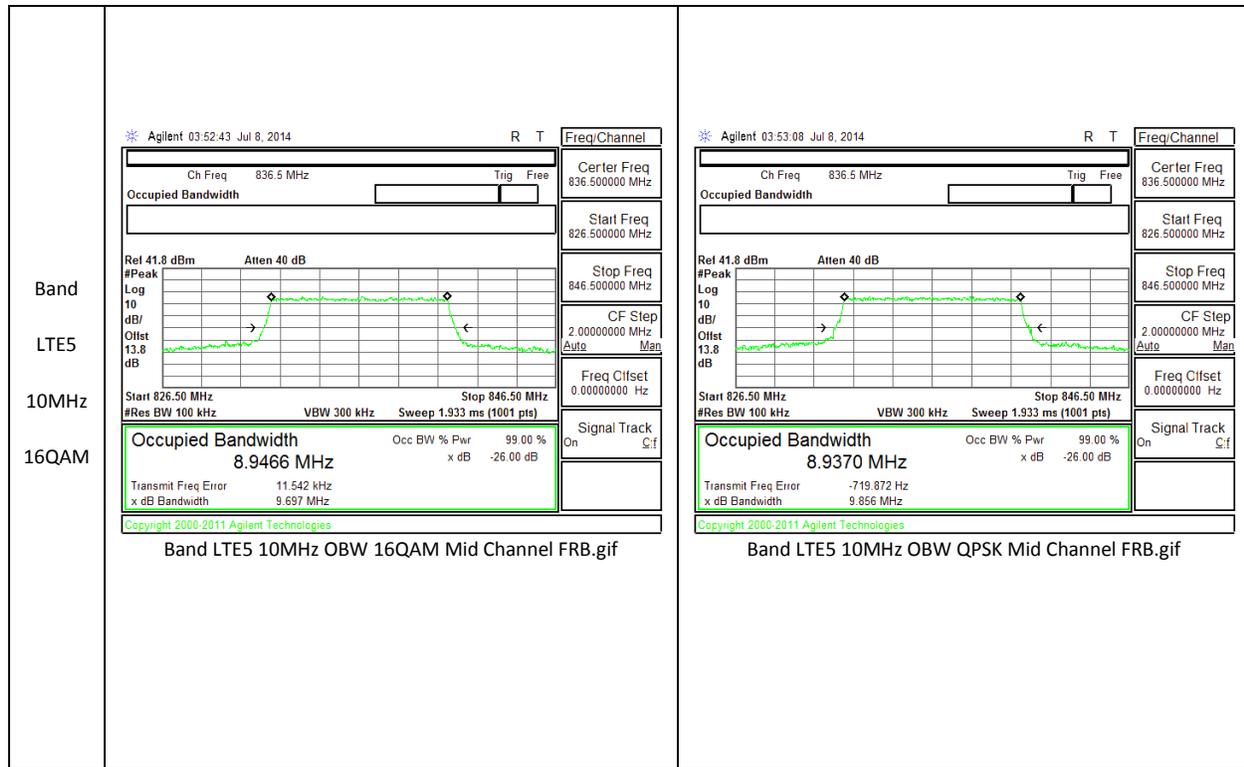

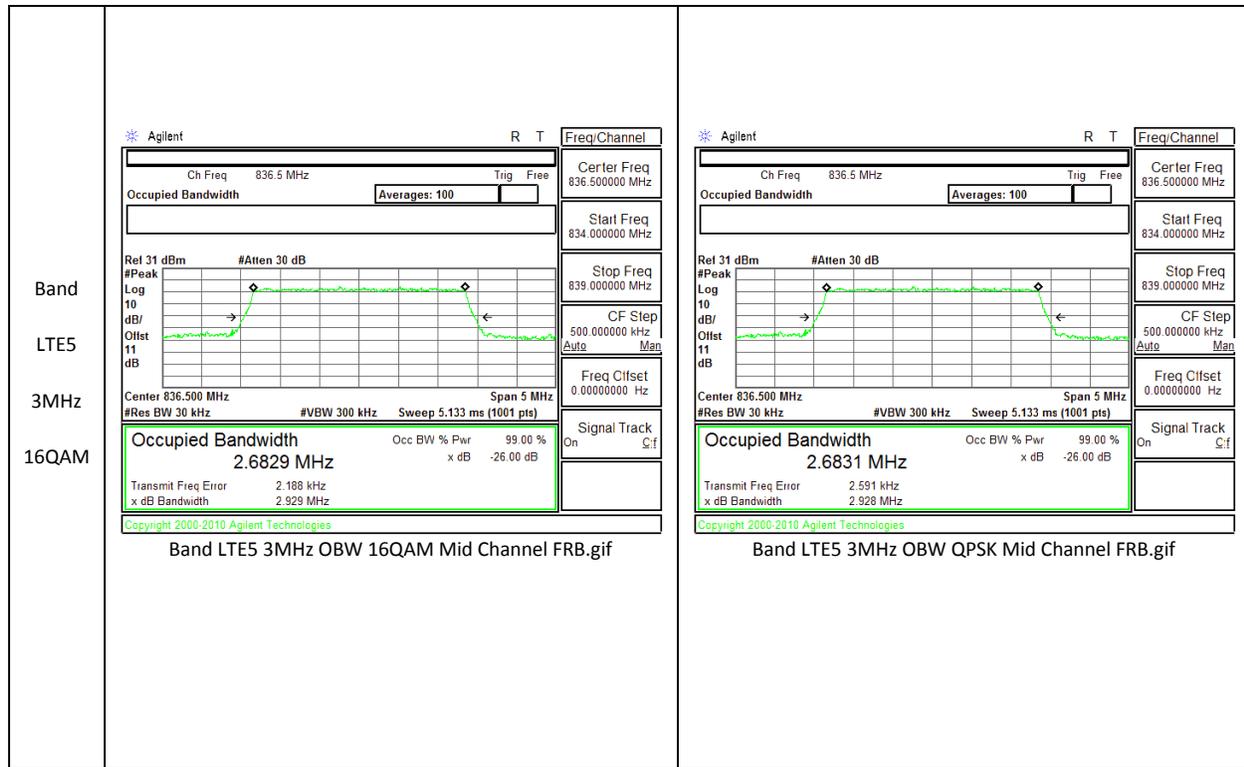

Band LTE5 3MHz OBW 16QAM Mid Channel FRB.gif

Band LTE5 3MHz OBW QPSK Mid Channel FRB.gif

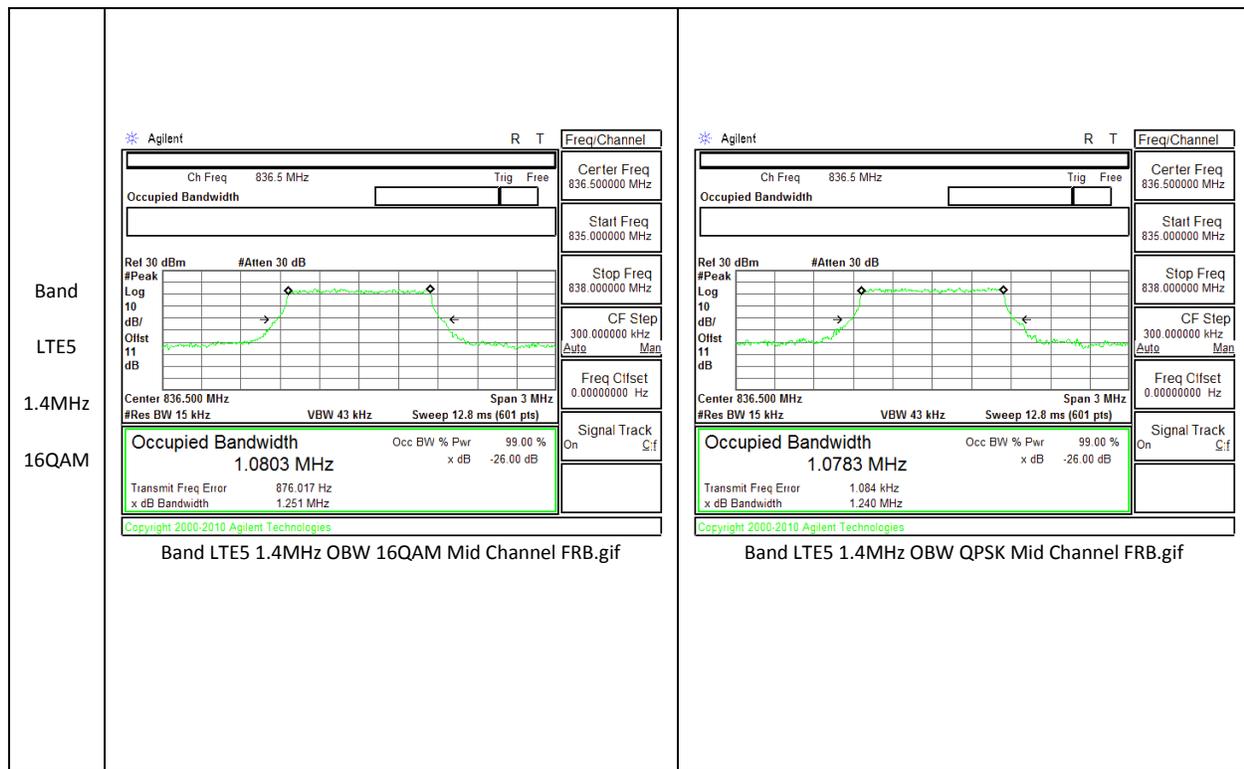

Band LTE5 1.4MHz OBW 16QAM Mid Channel FRB.gif

Band LTE5 1.4MHz OBW QPSK Mid Channel FRB.gif

## **10.2. BAND EDGE EMISSIONS**

### **RULE PART(S)**

FCC: §22.359, §24.238, §27

### **LIMITS**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.


### **TEST PROCEDURE**


Per KDB 971168 D01 Power Meas License Digital Systems v02r01


The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.


### **RESULTS**


10.2.1. BAND EDGE PLOTS

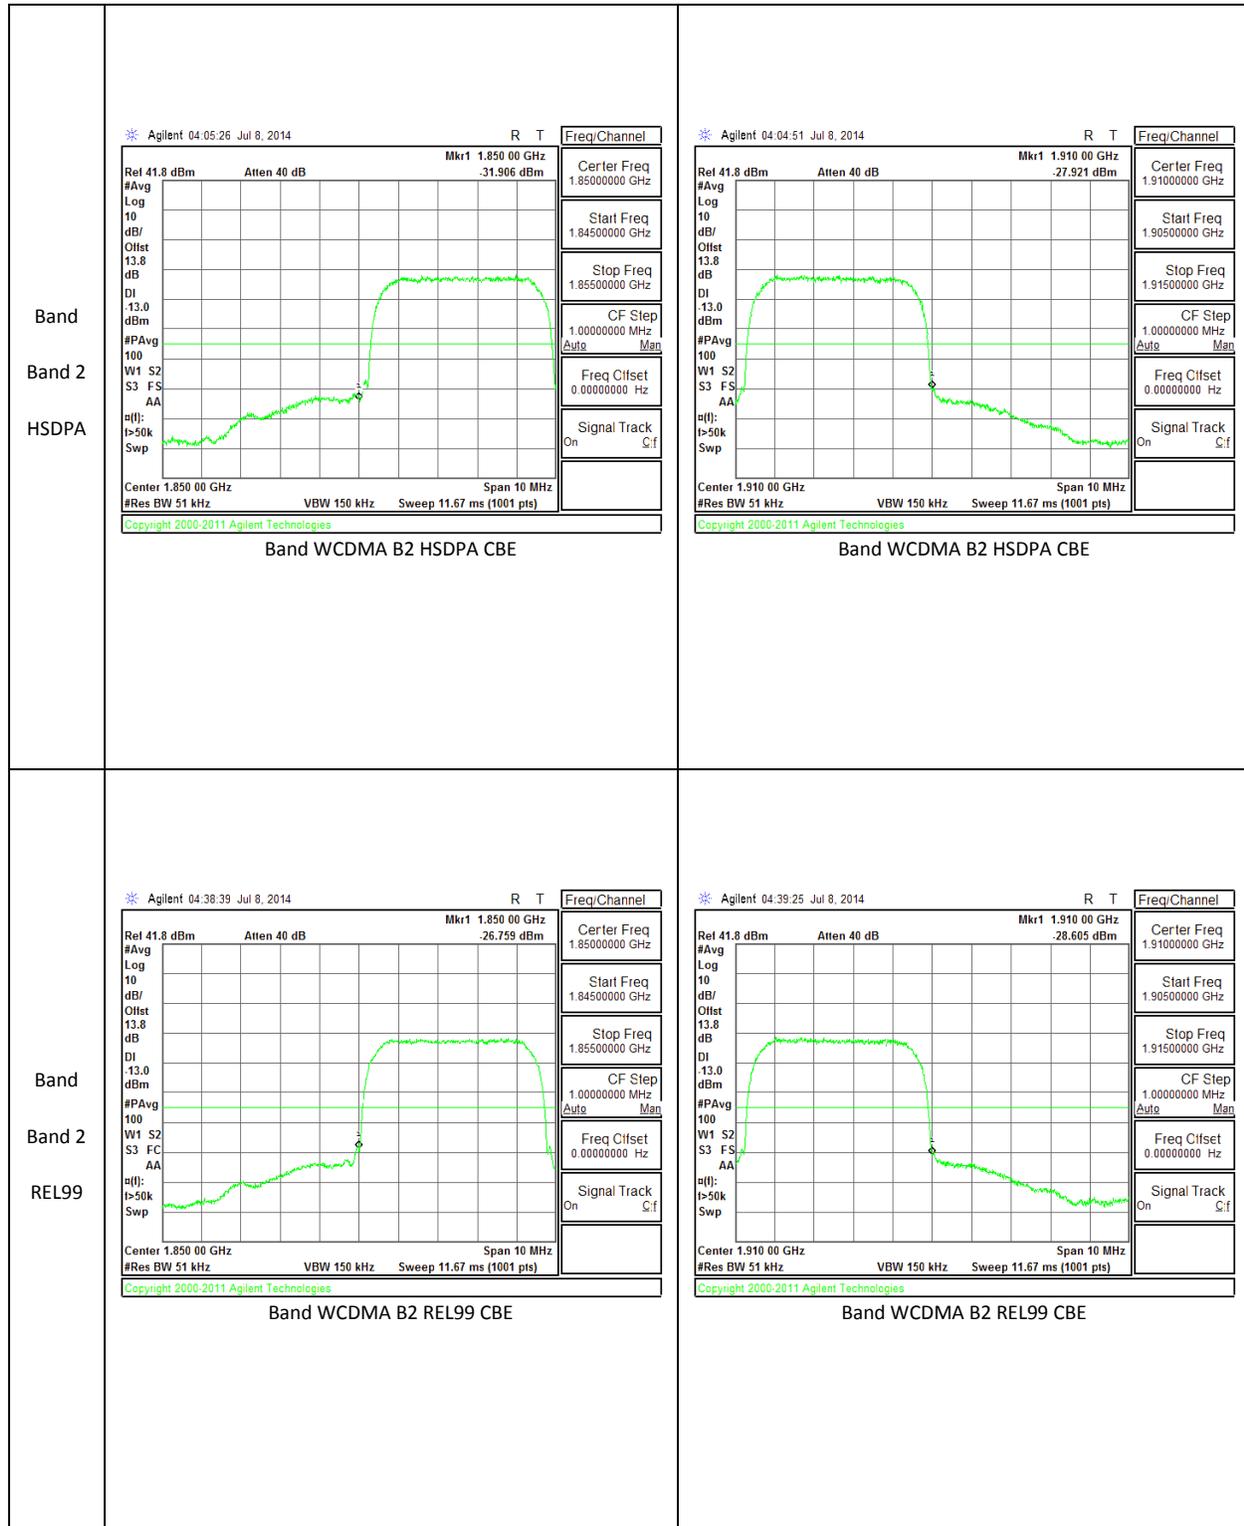


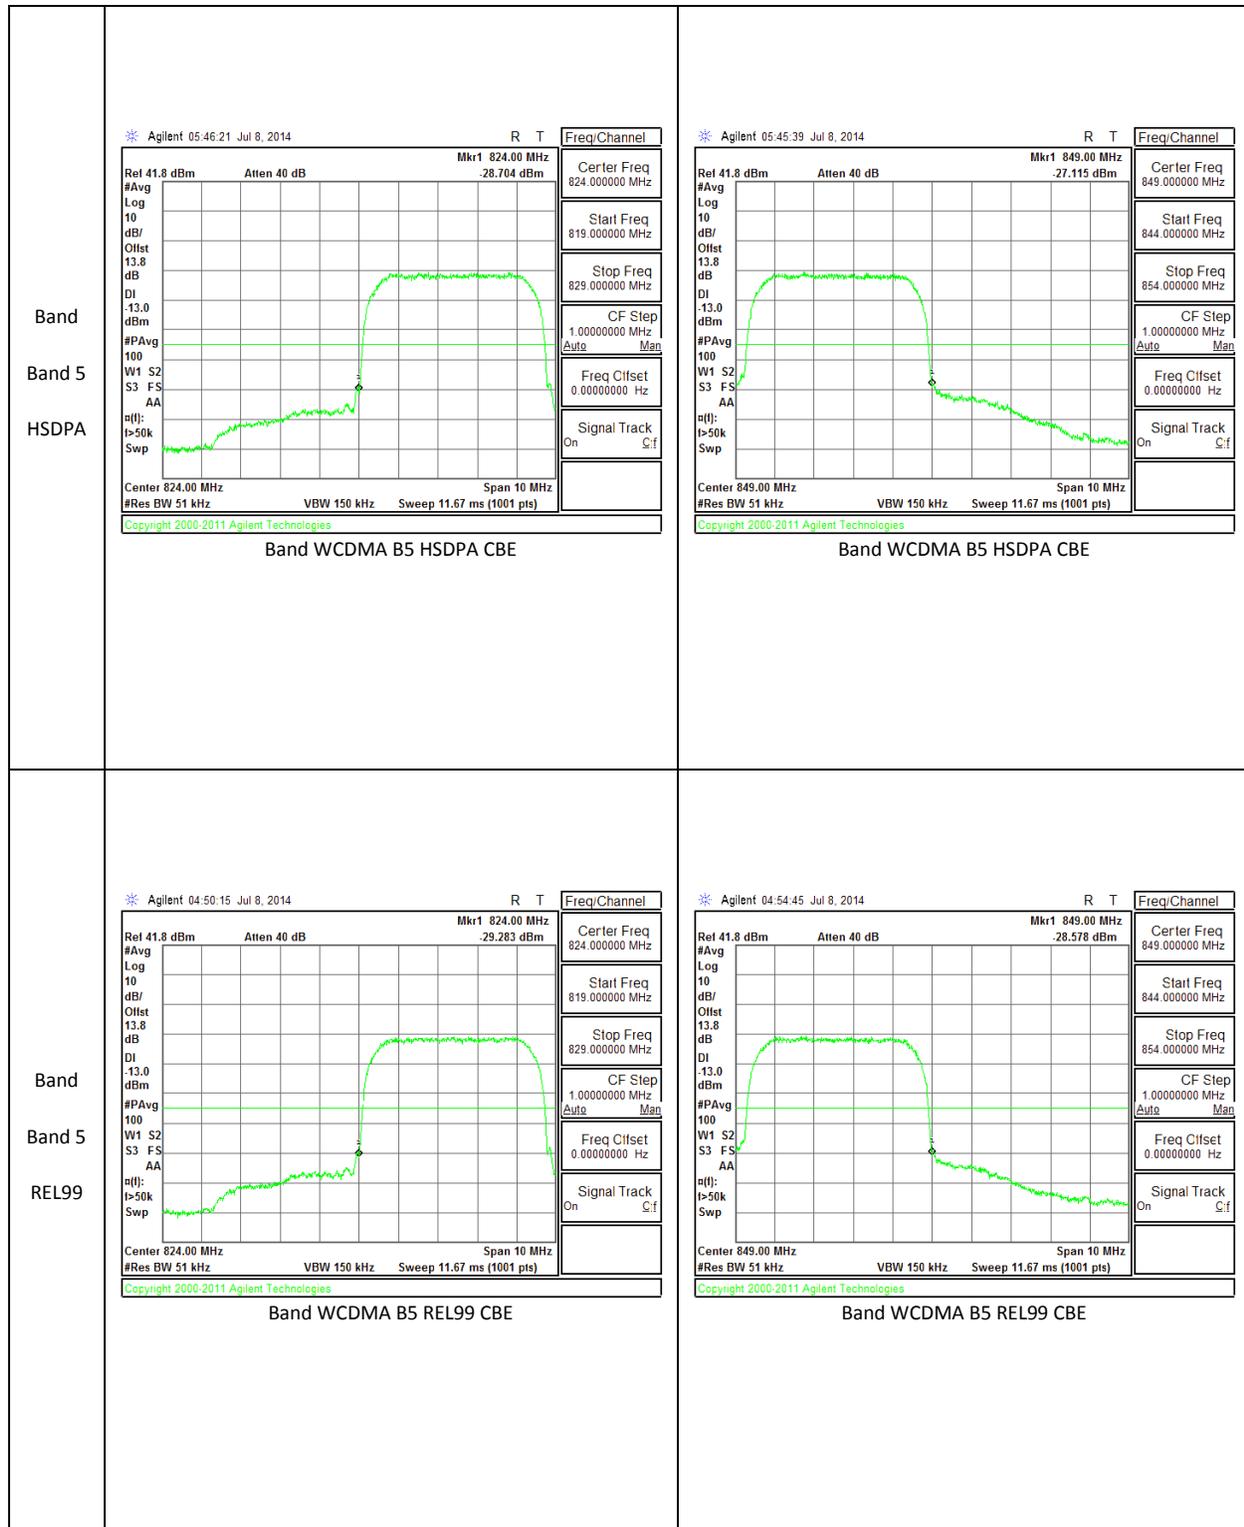


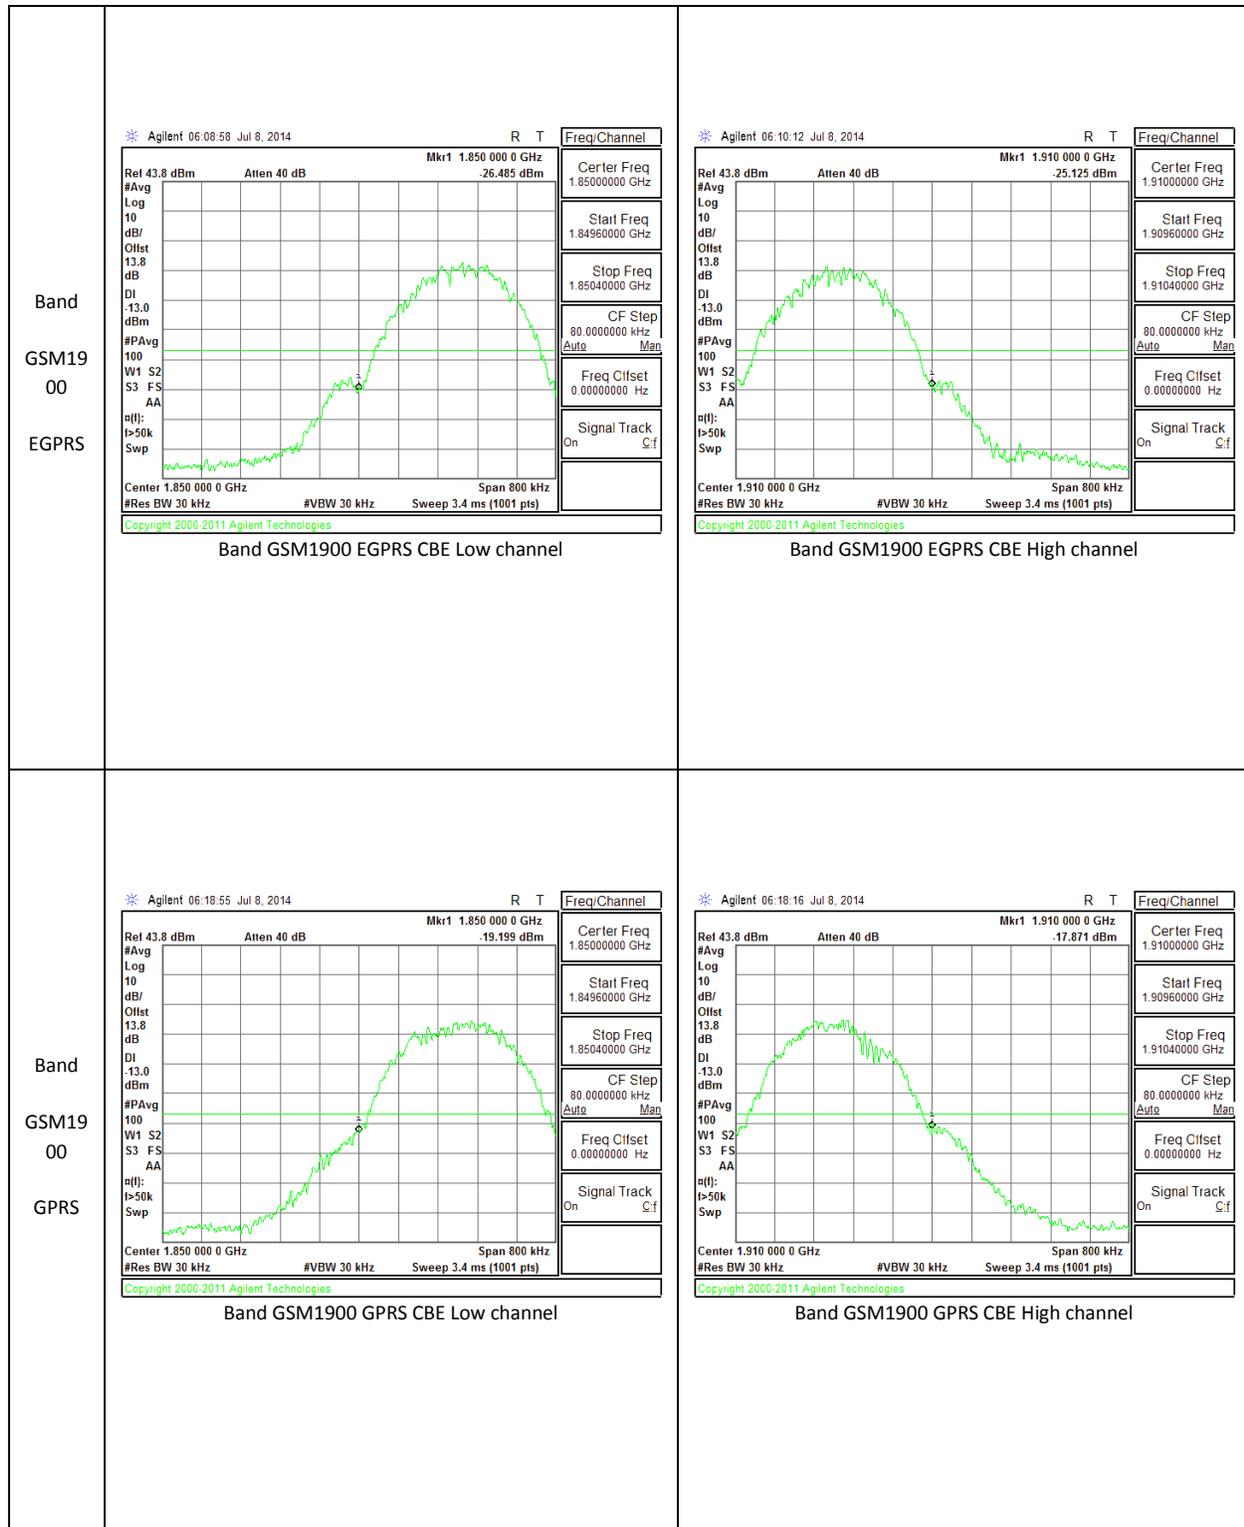


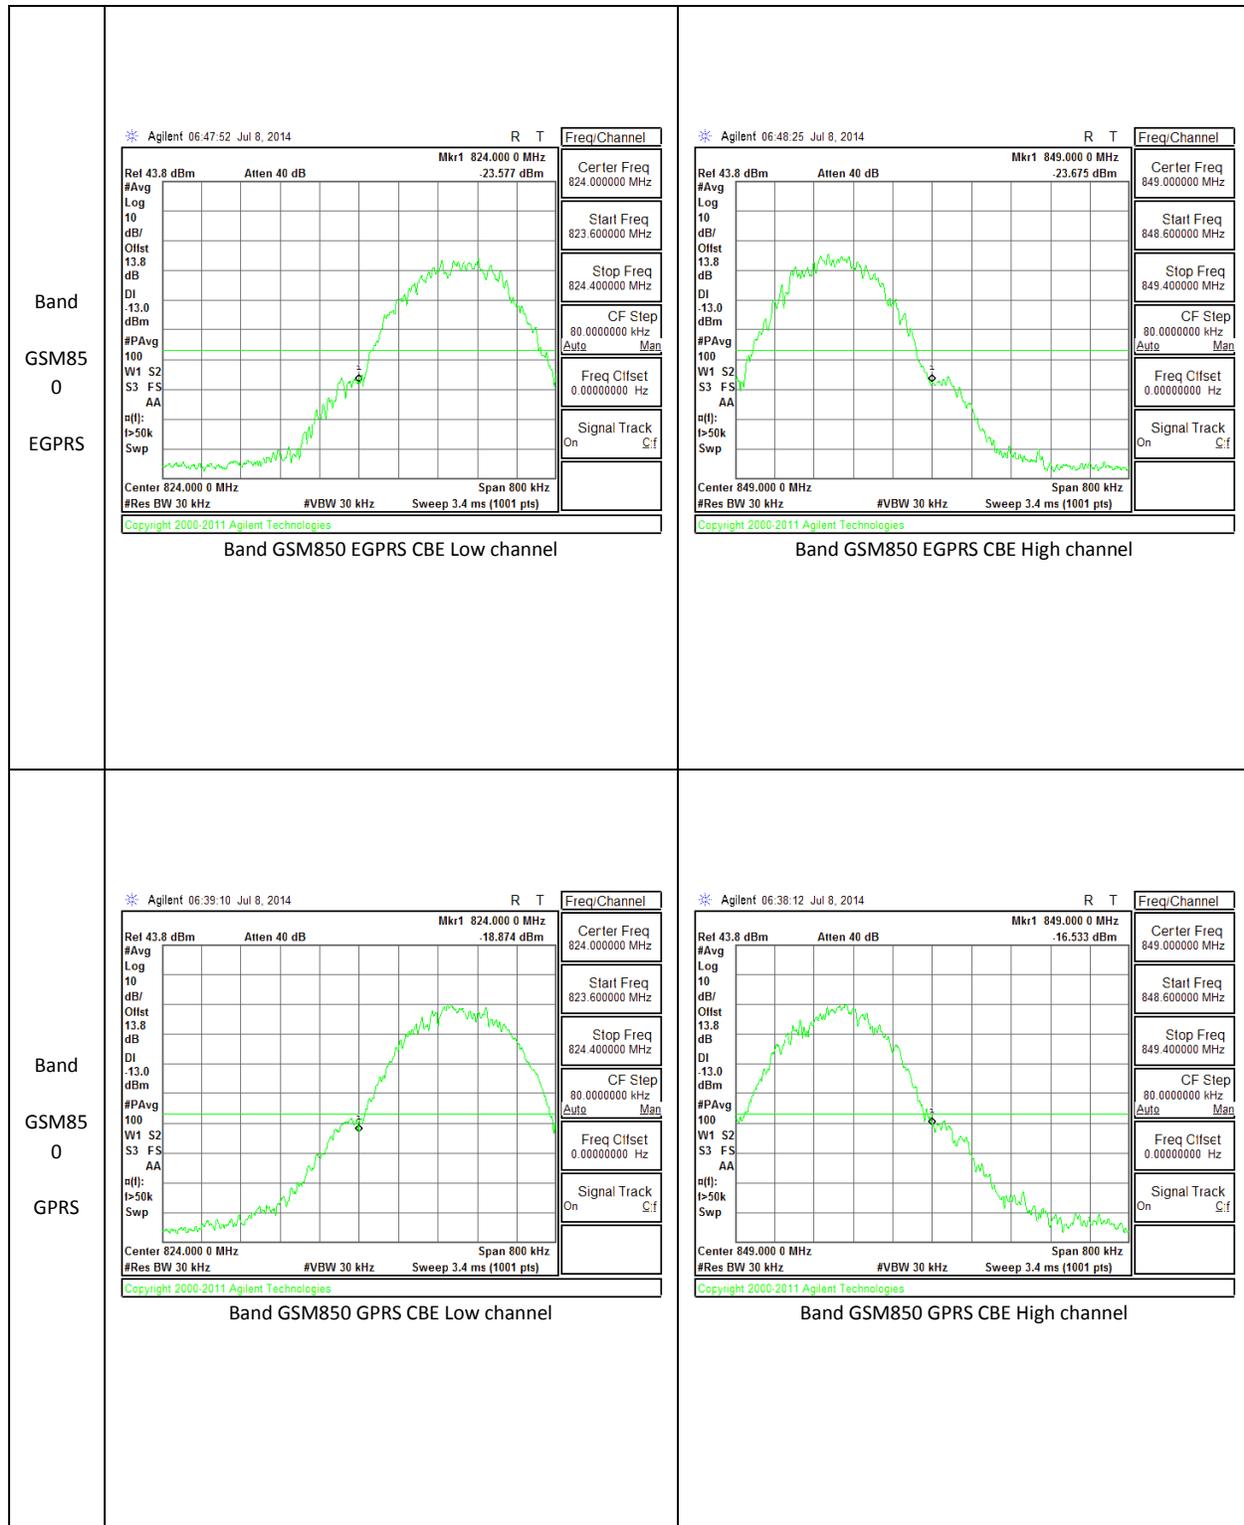


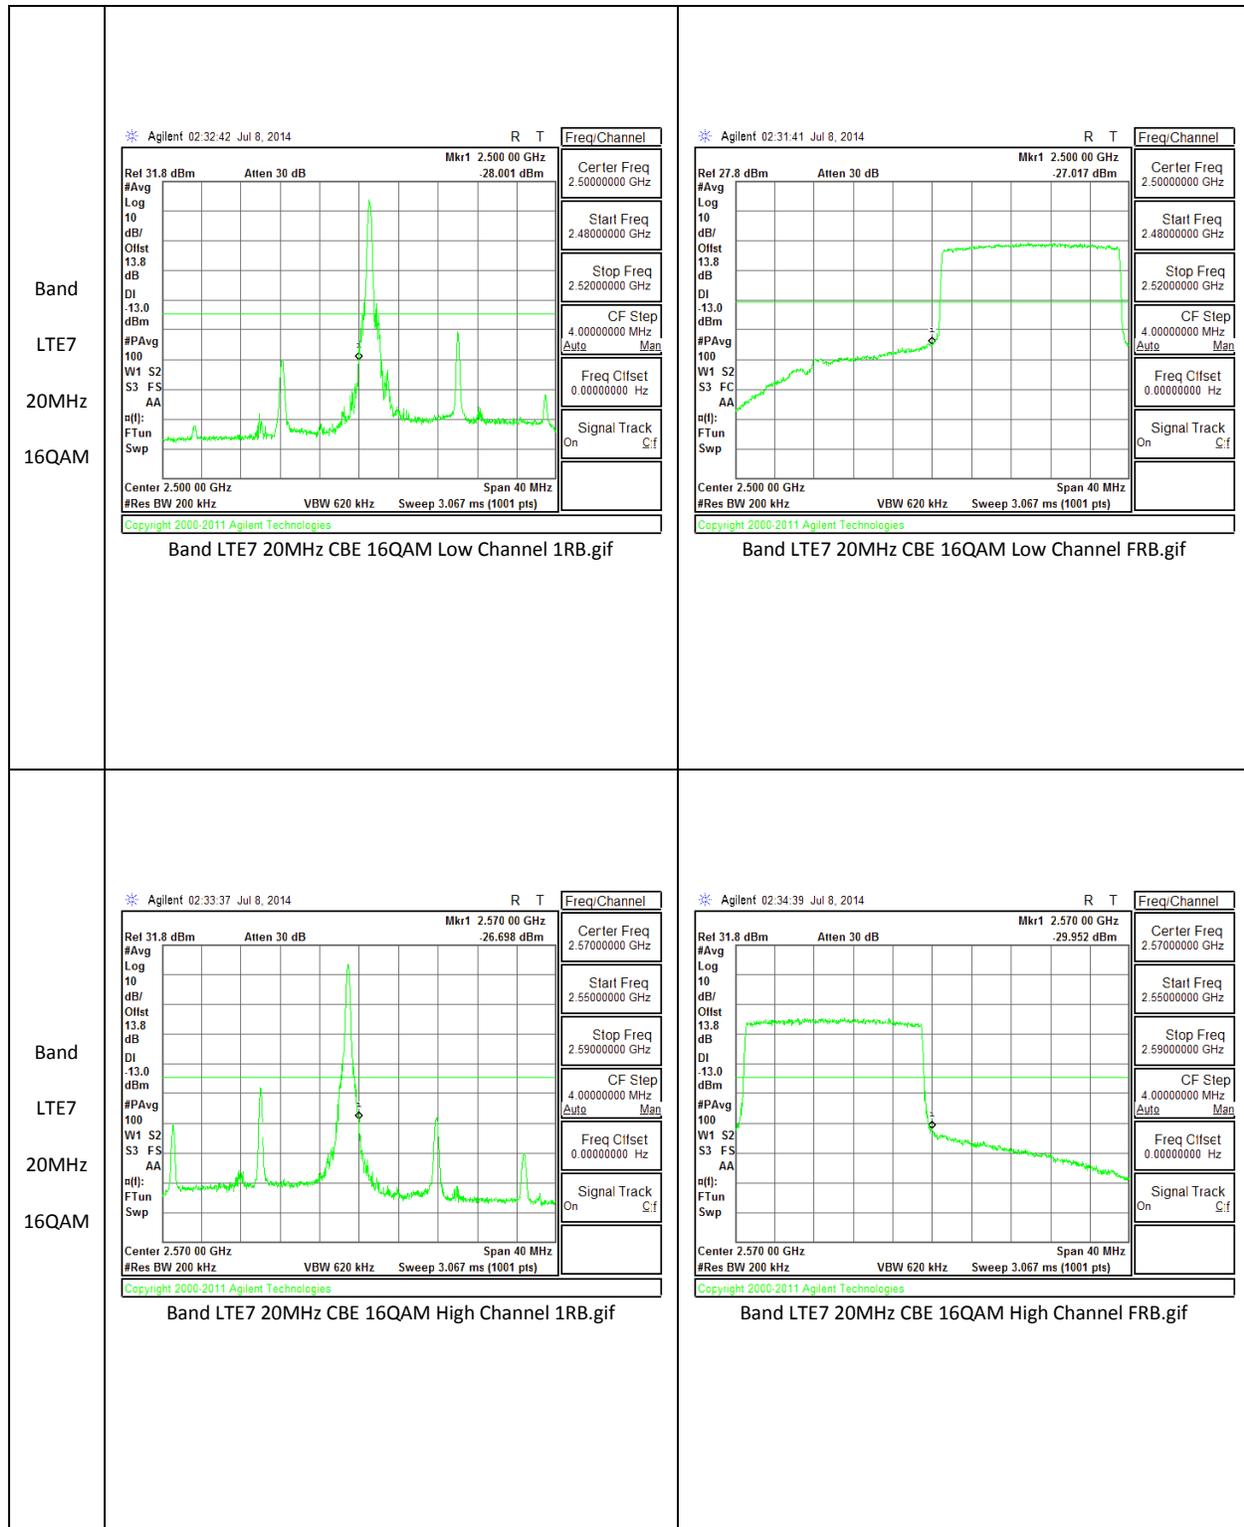


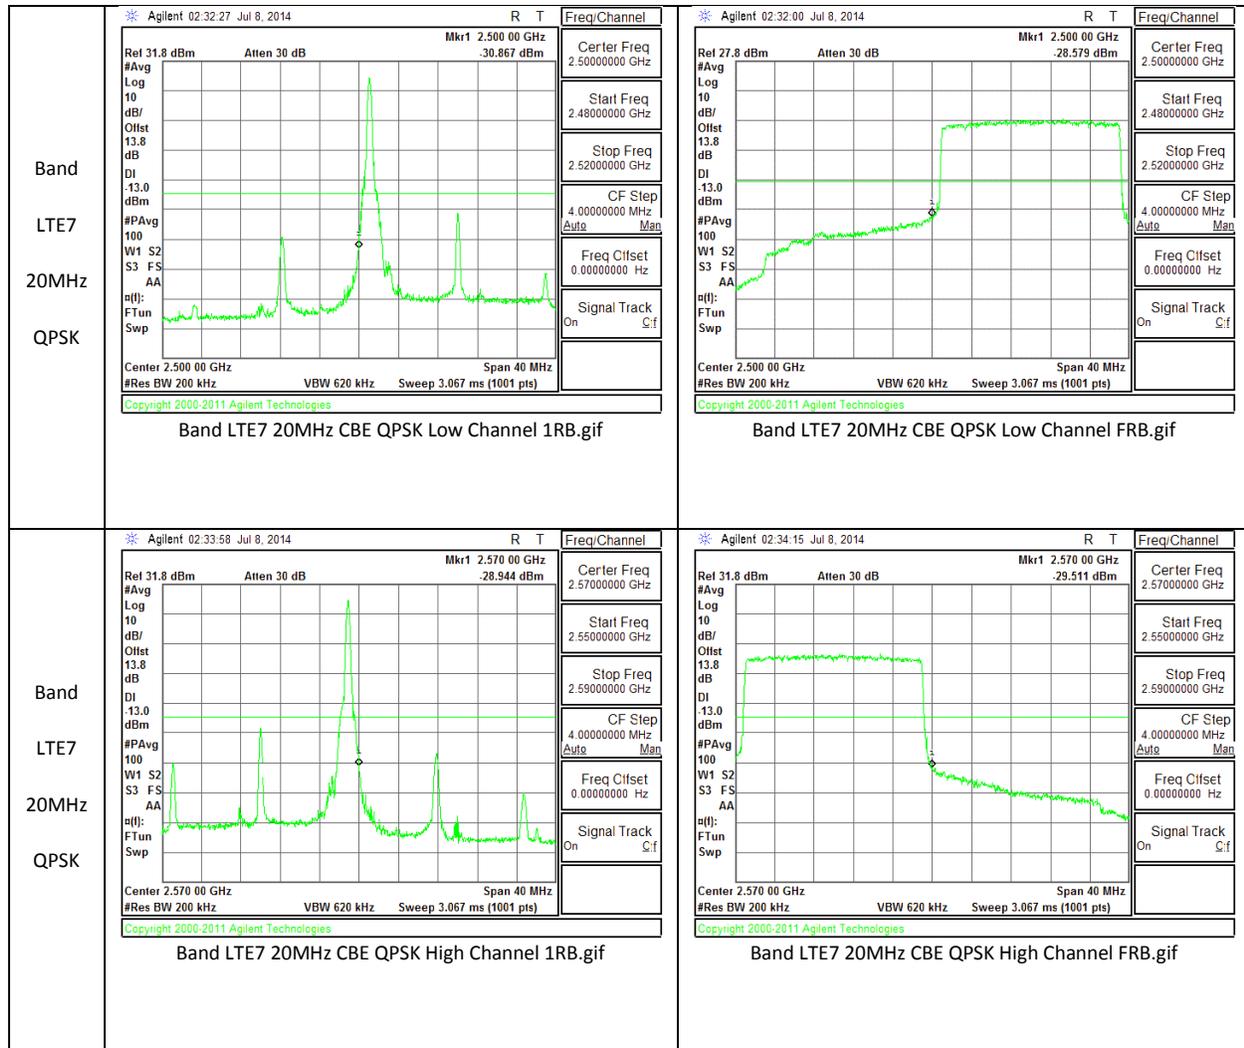


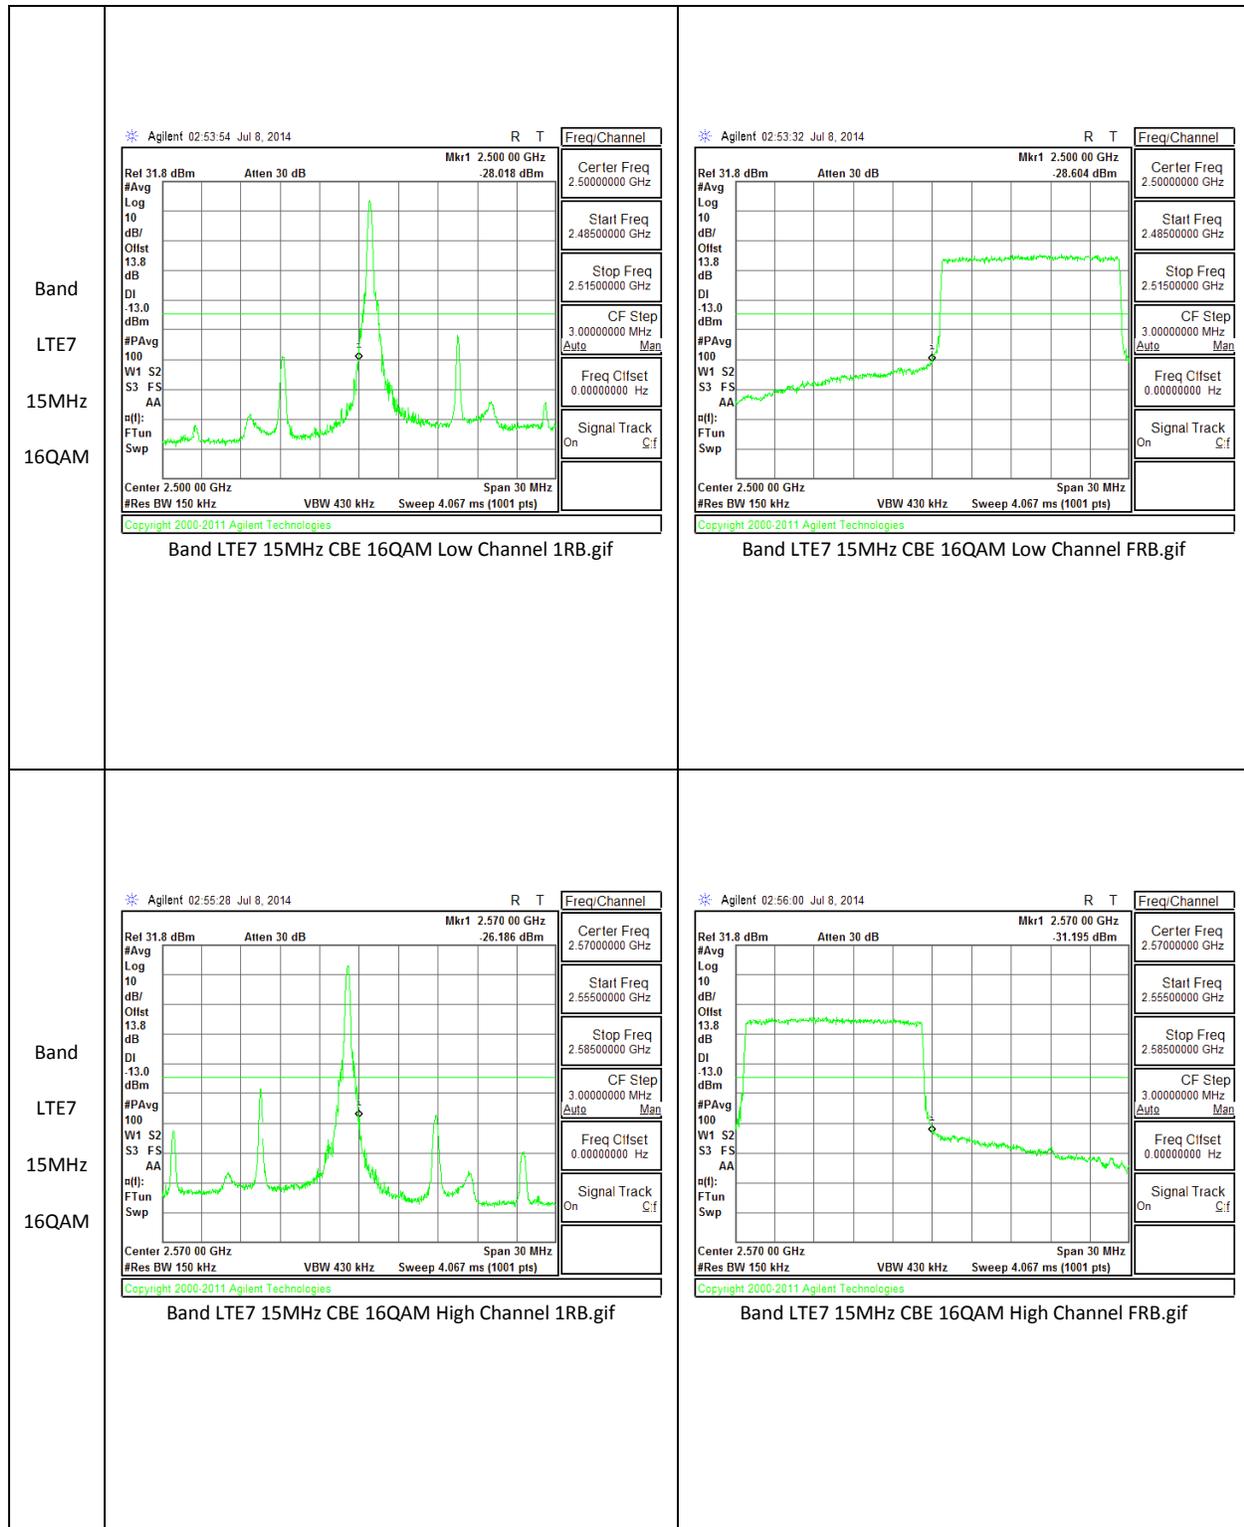


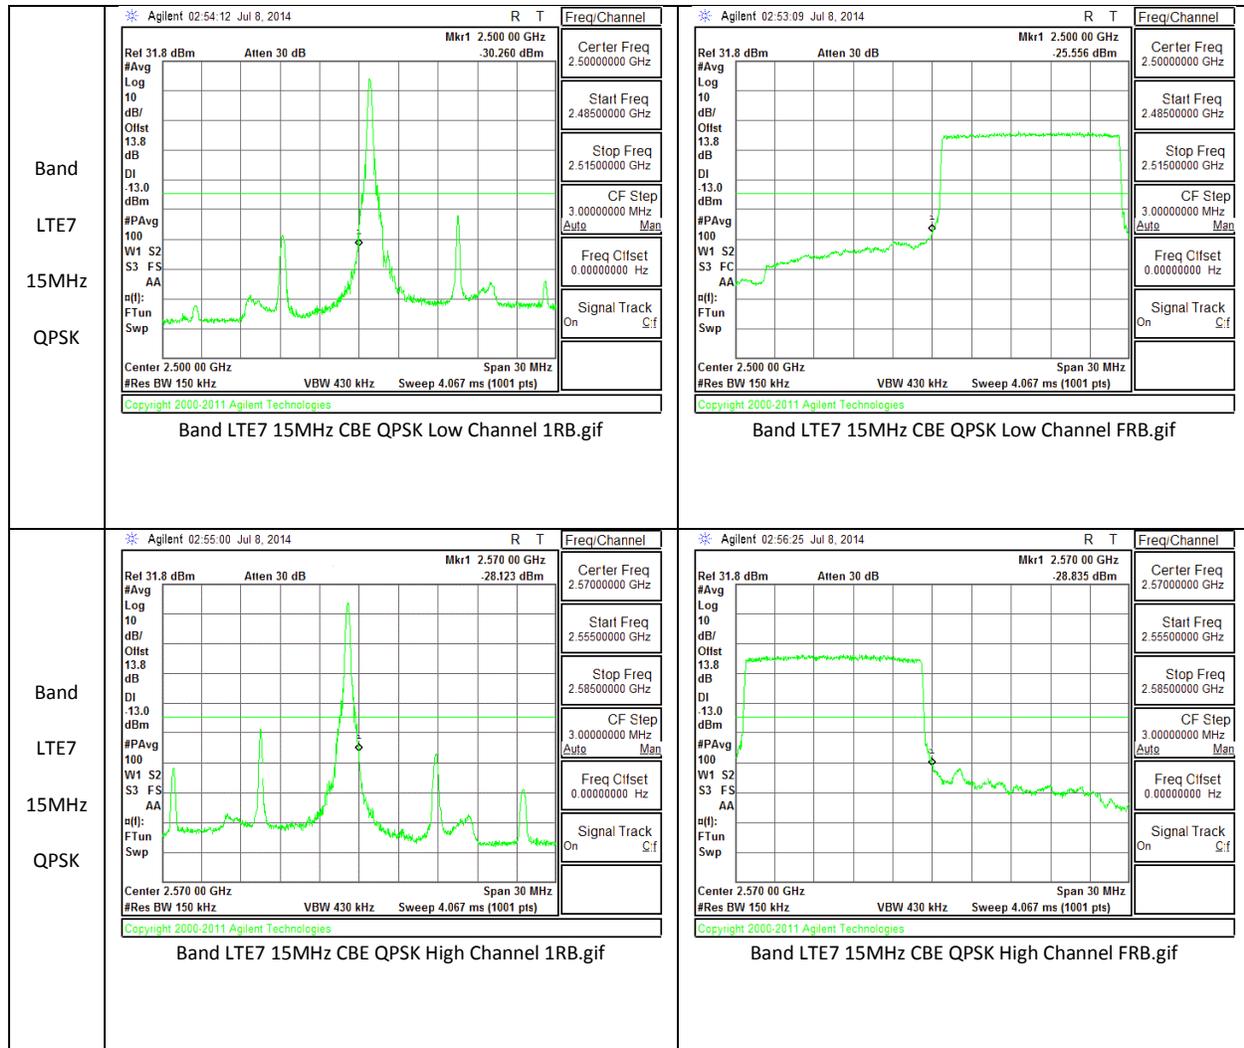


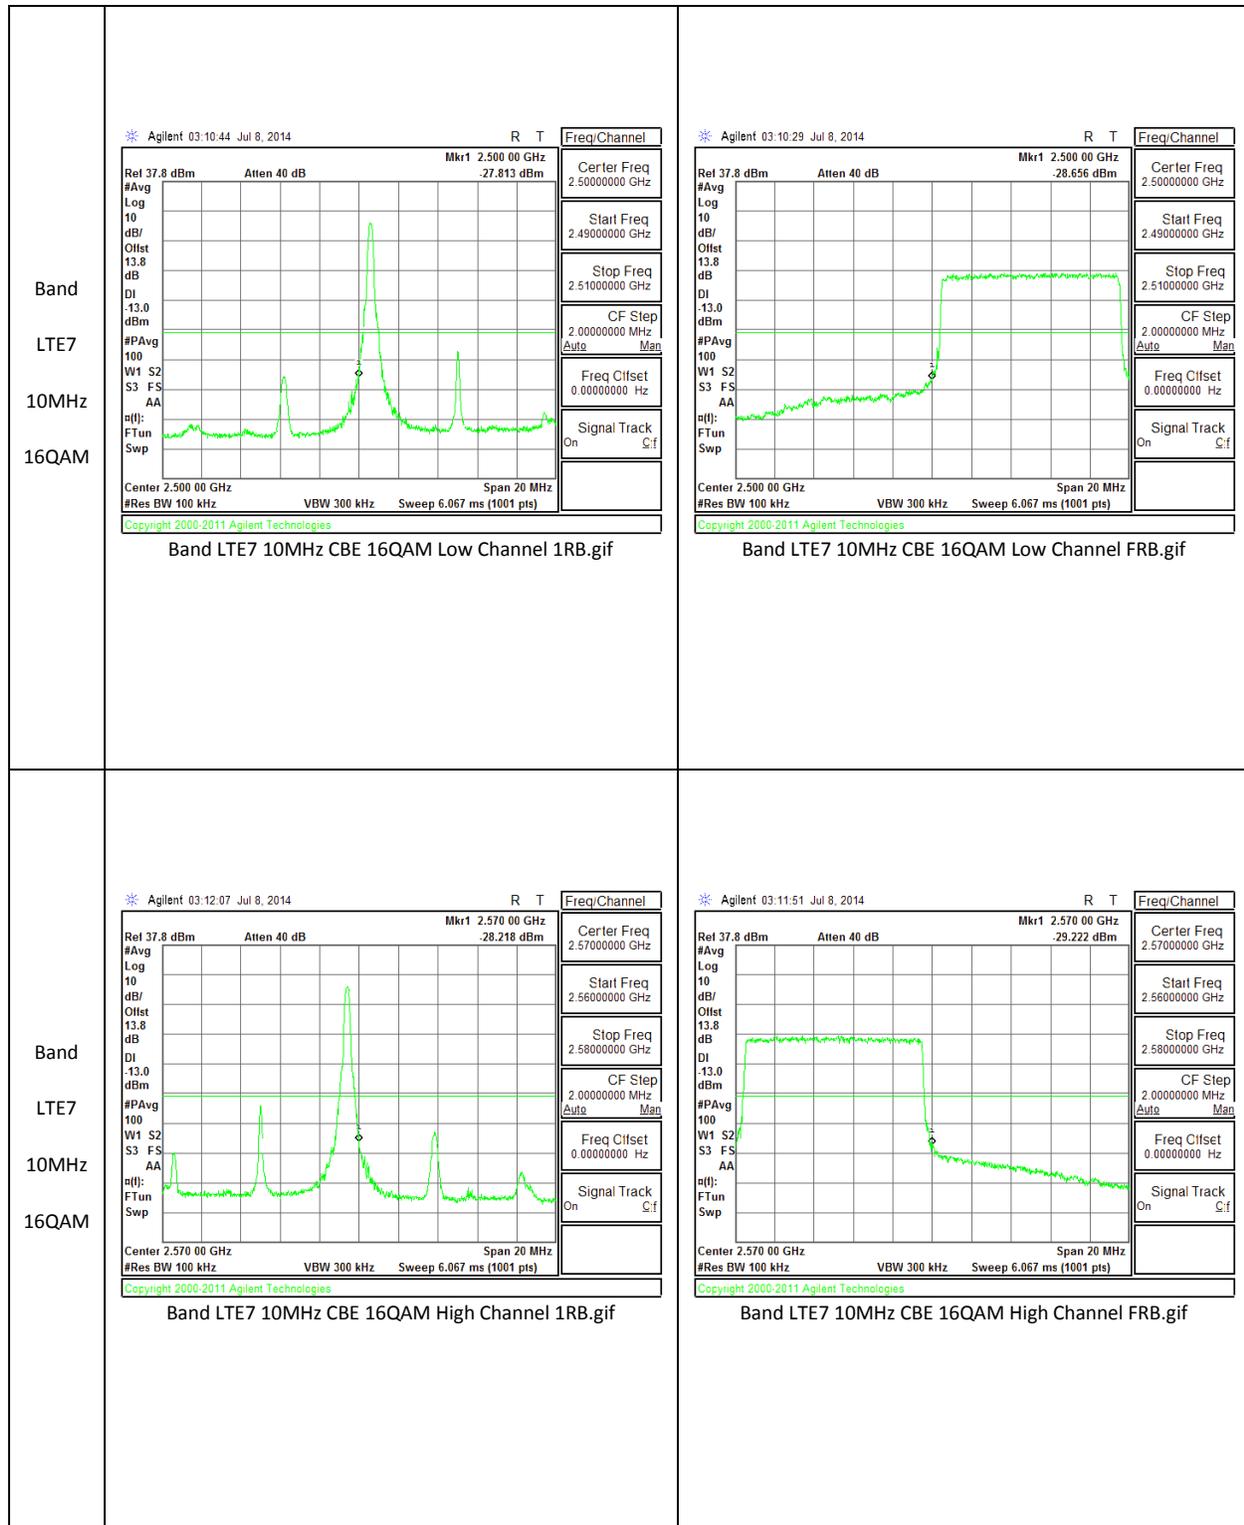


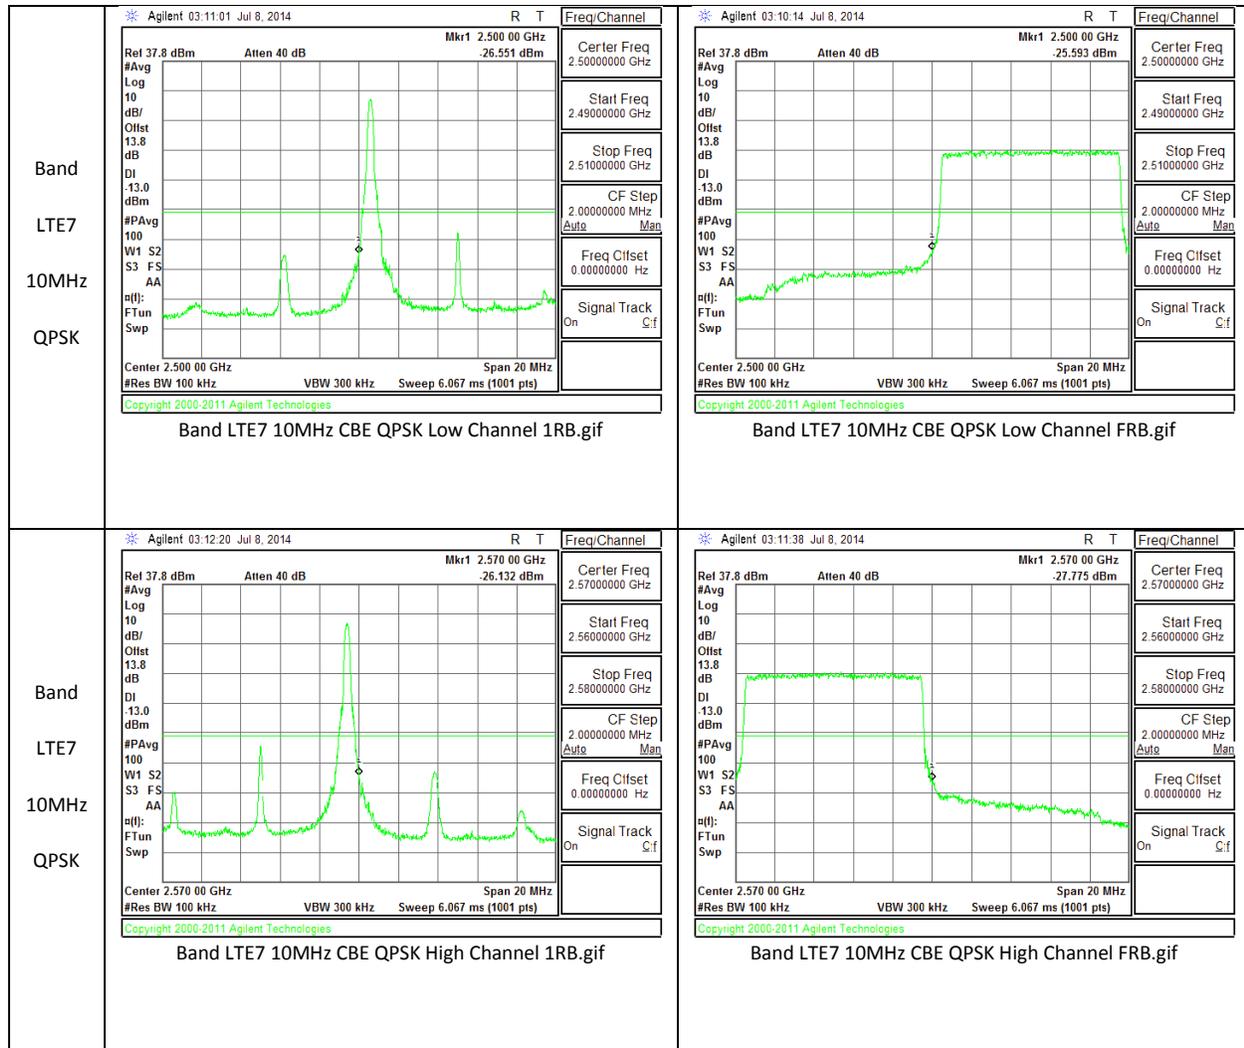


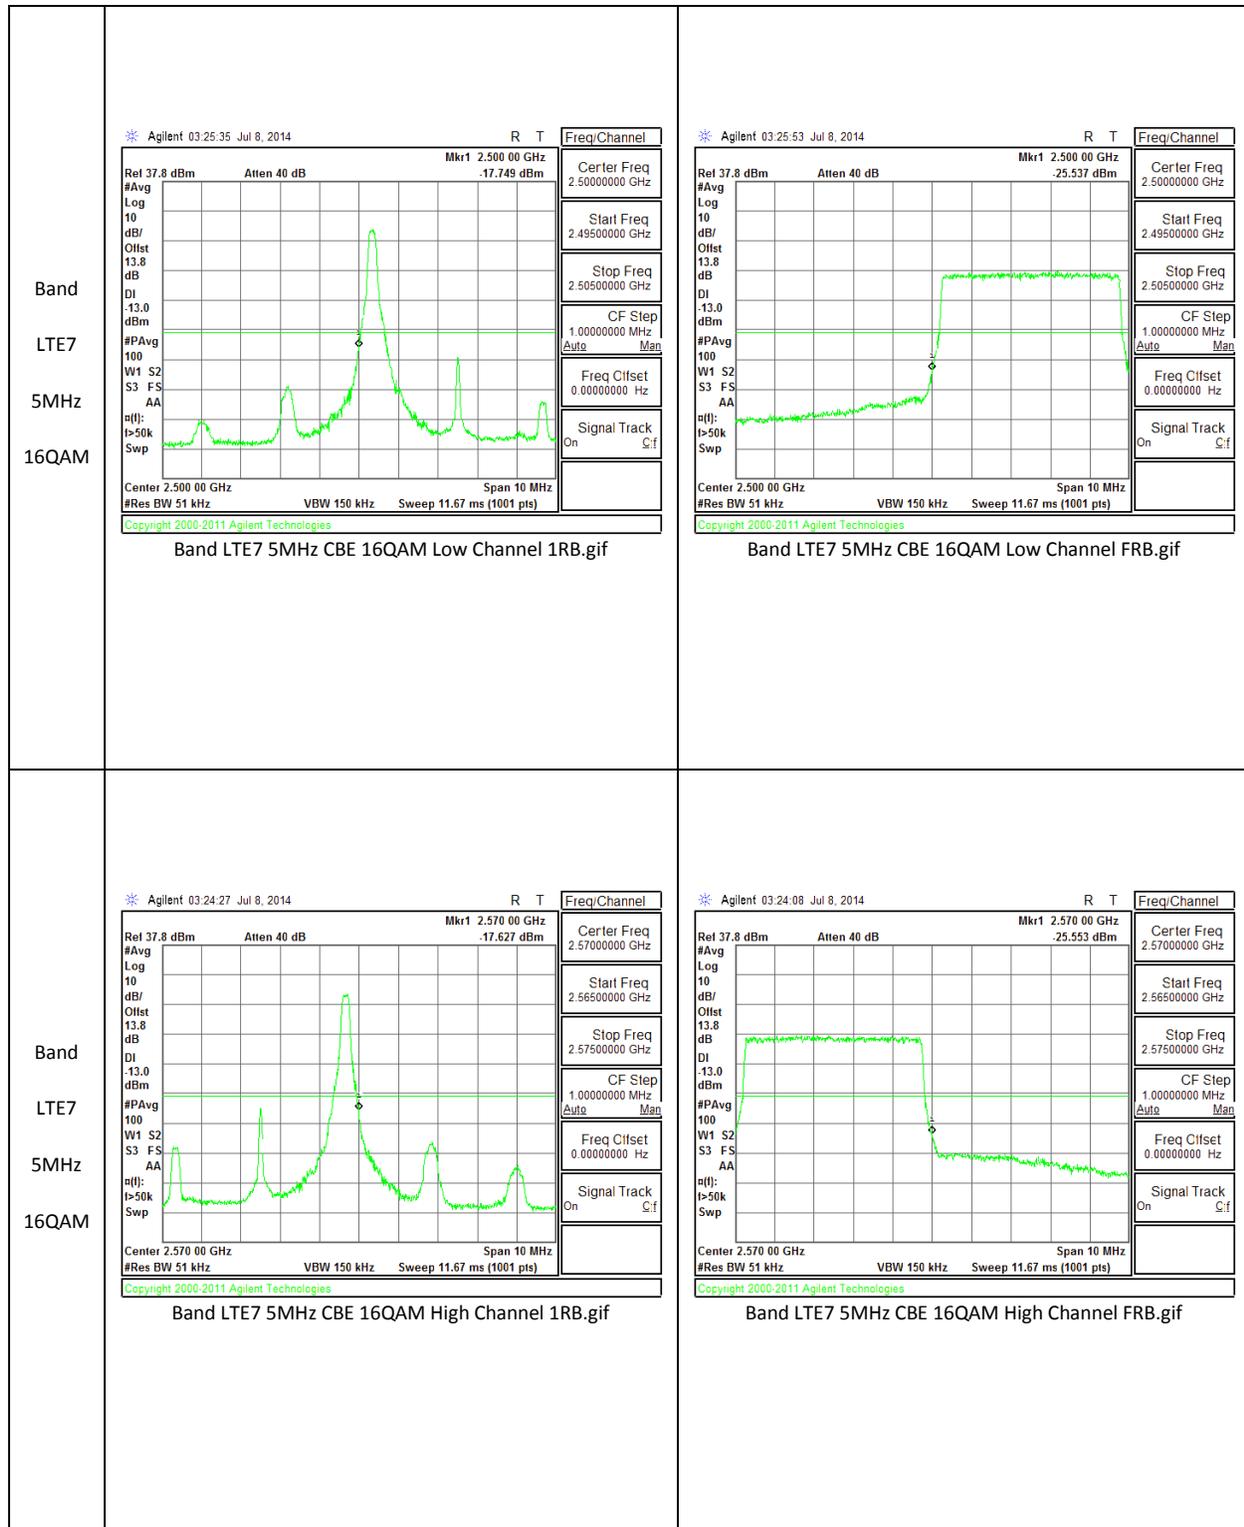


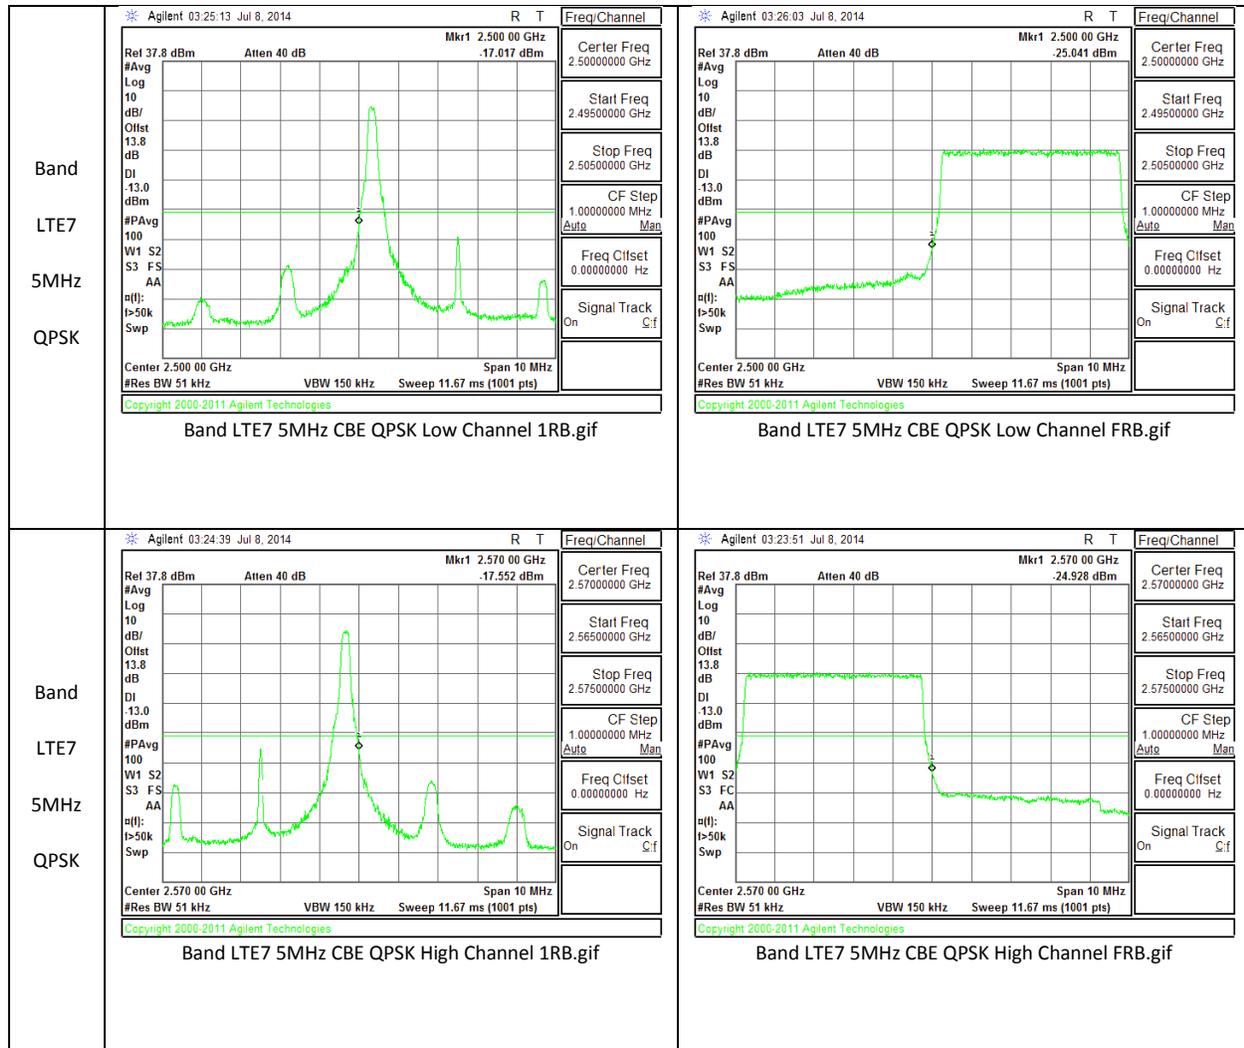


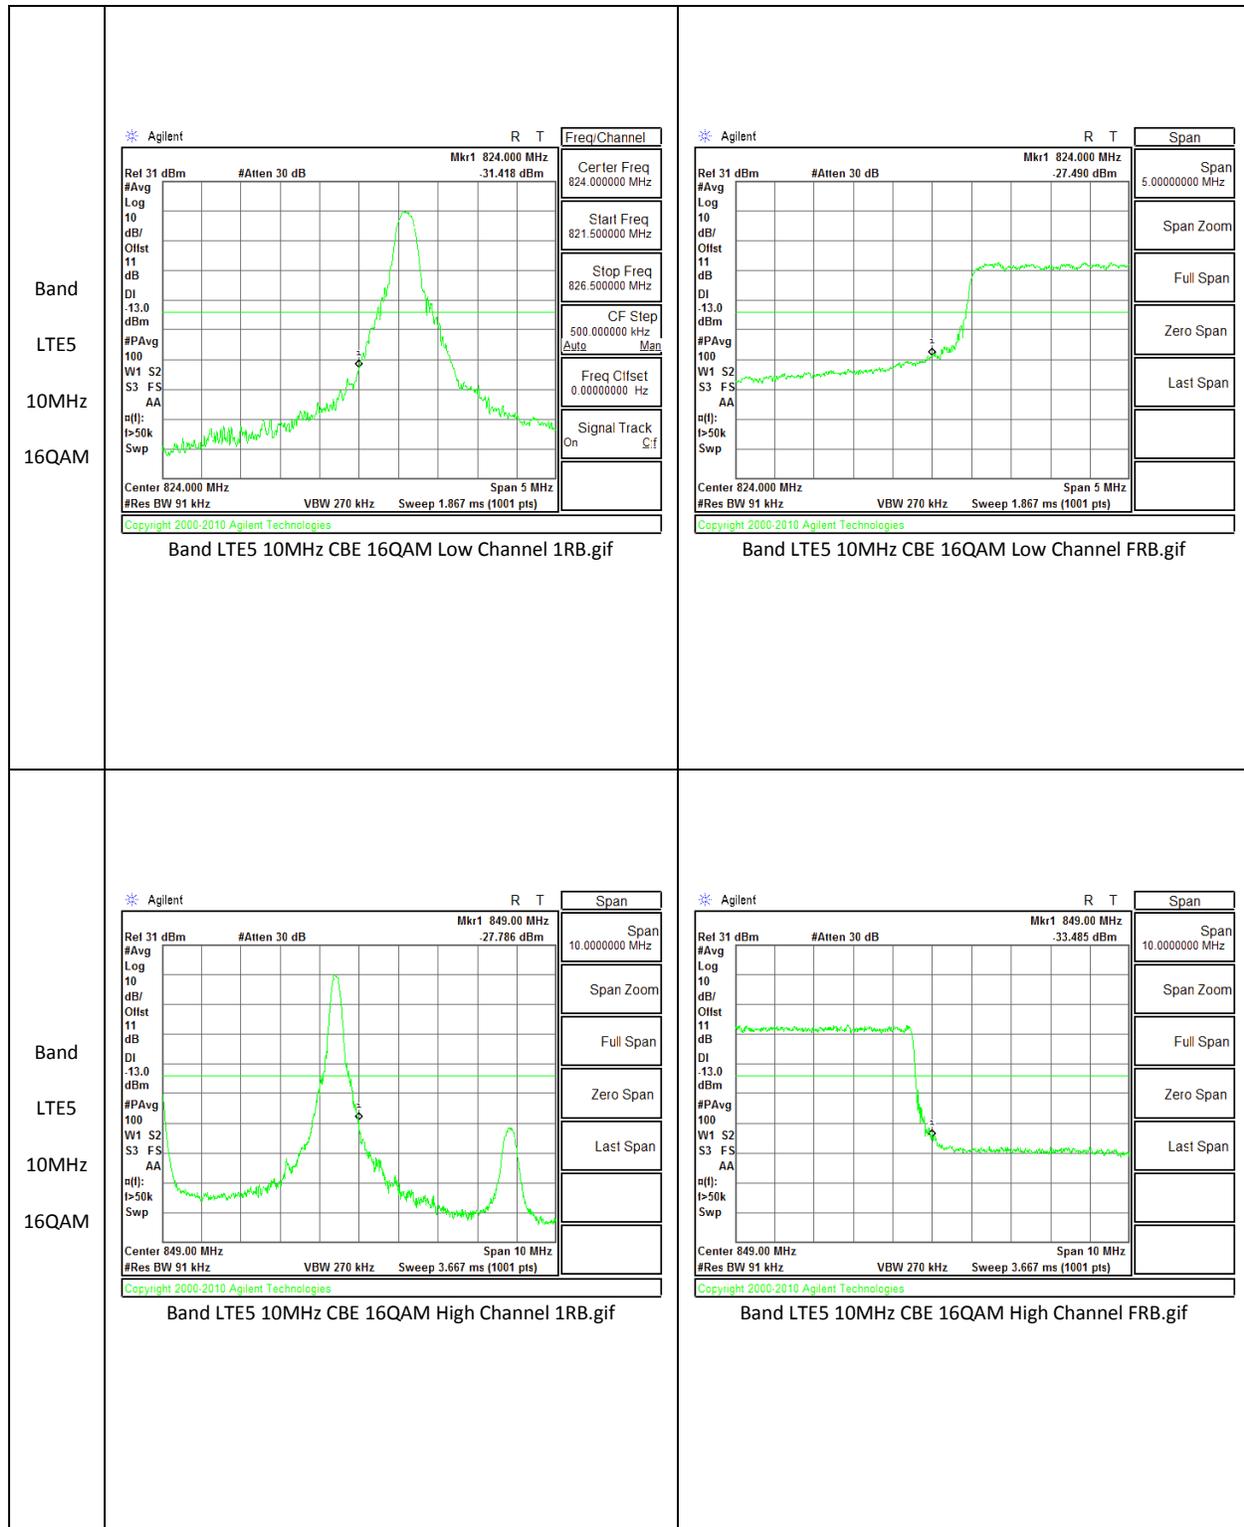


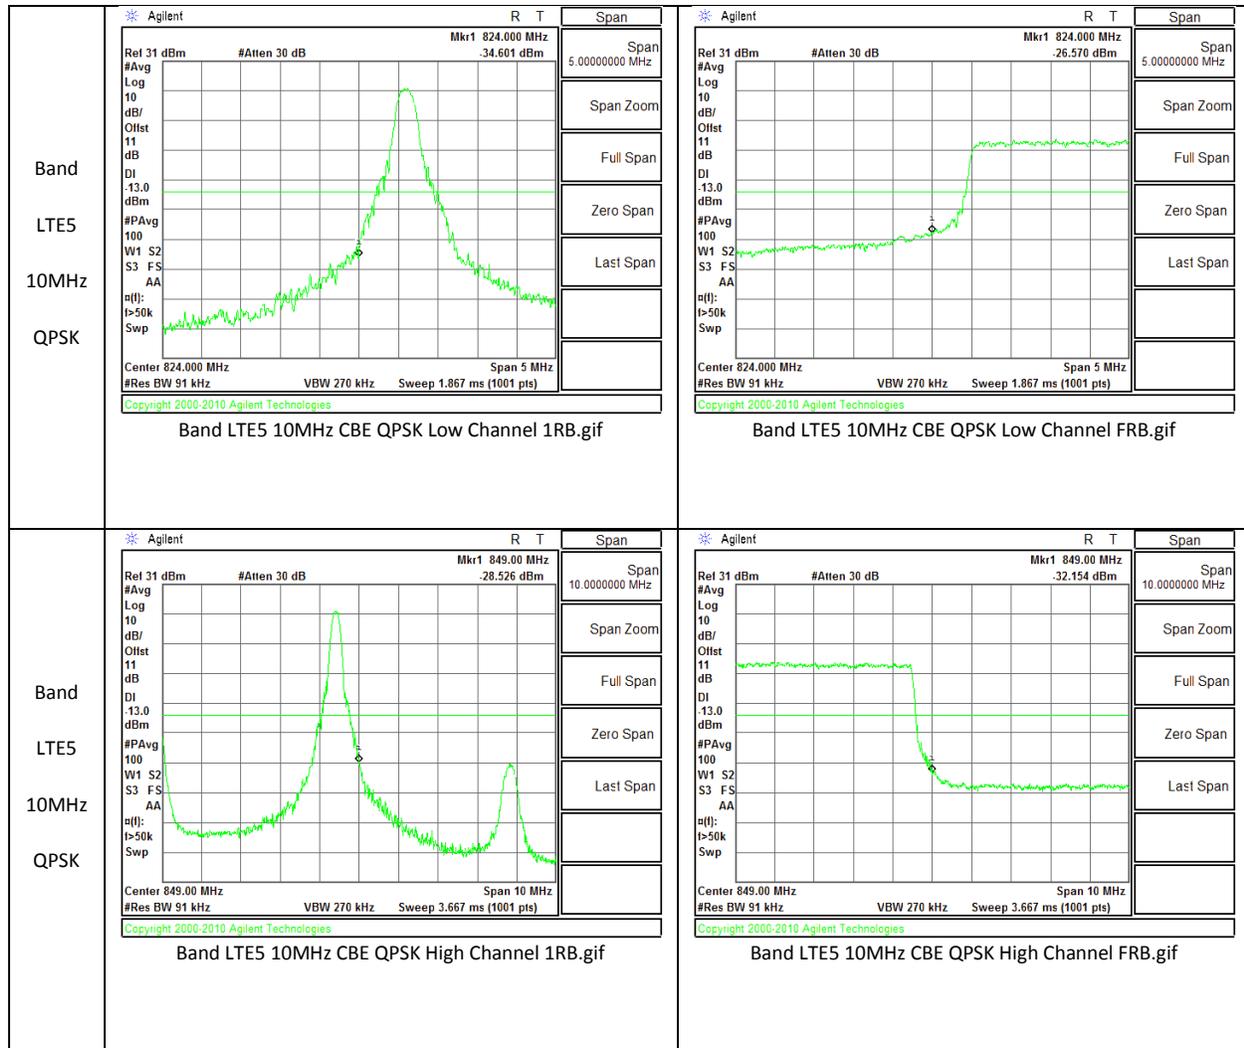


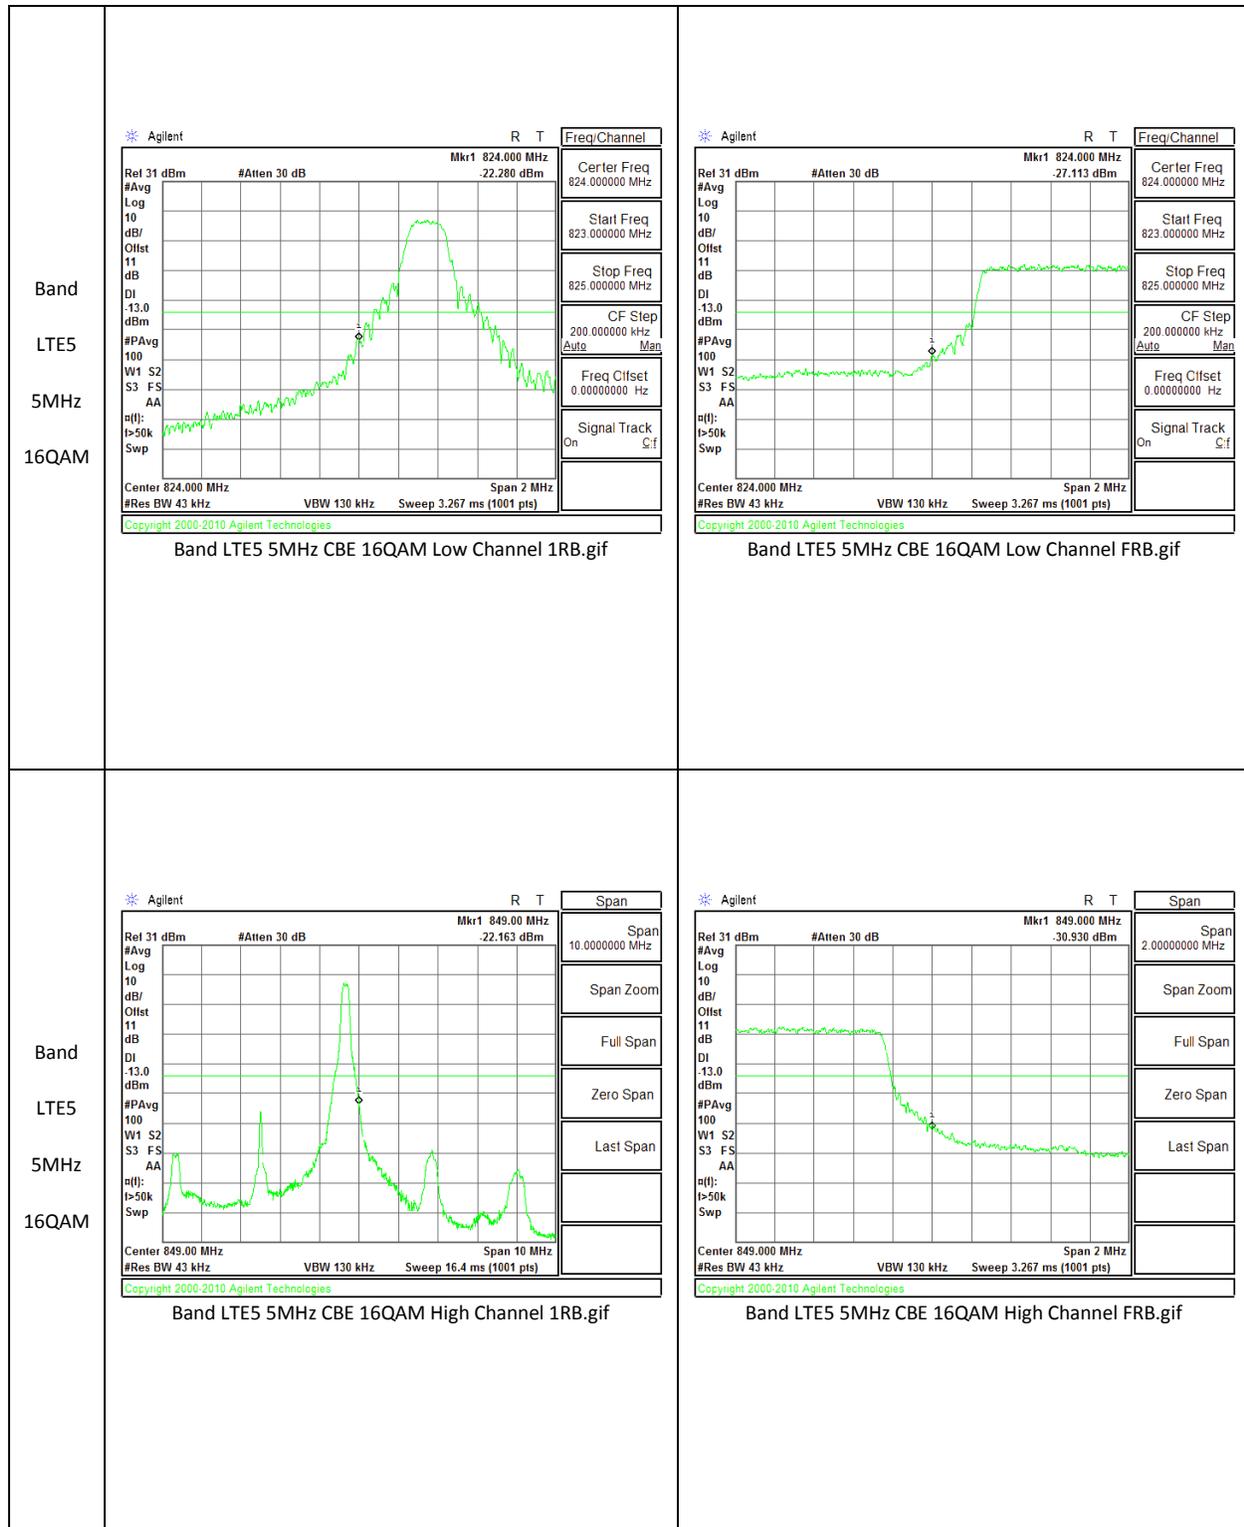


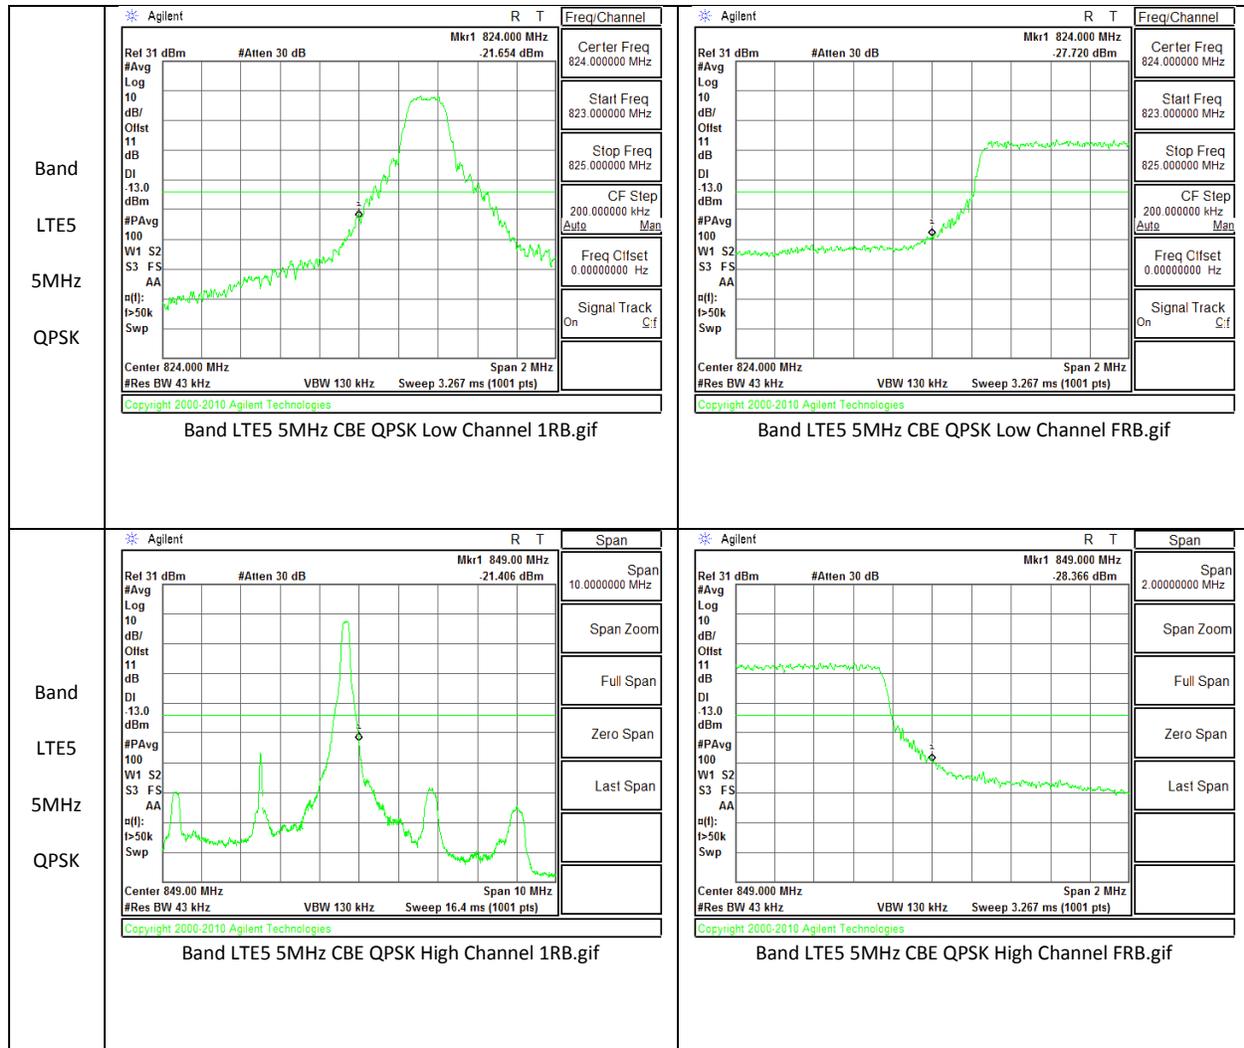

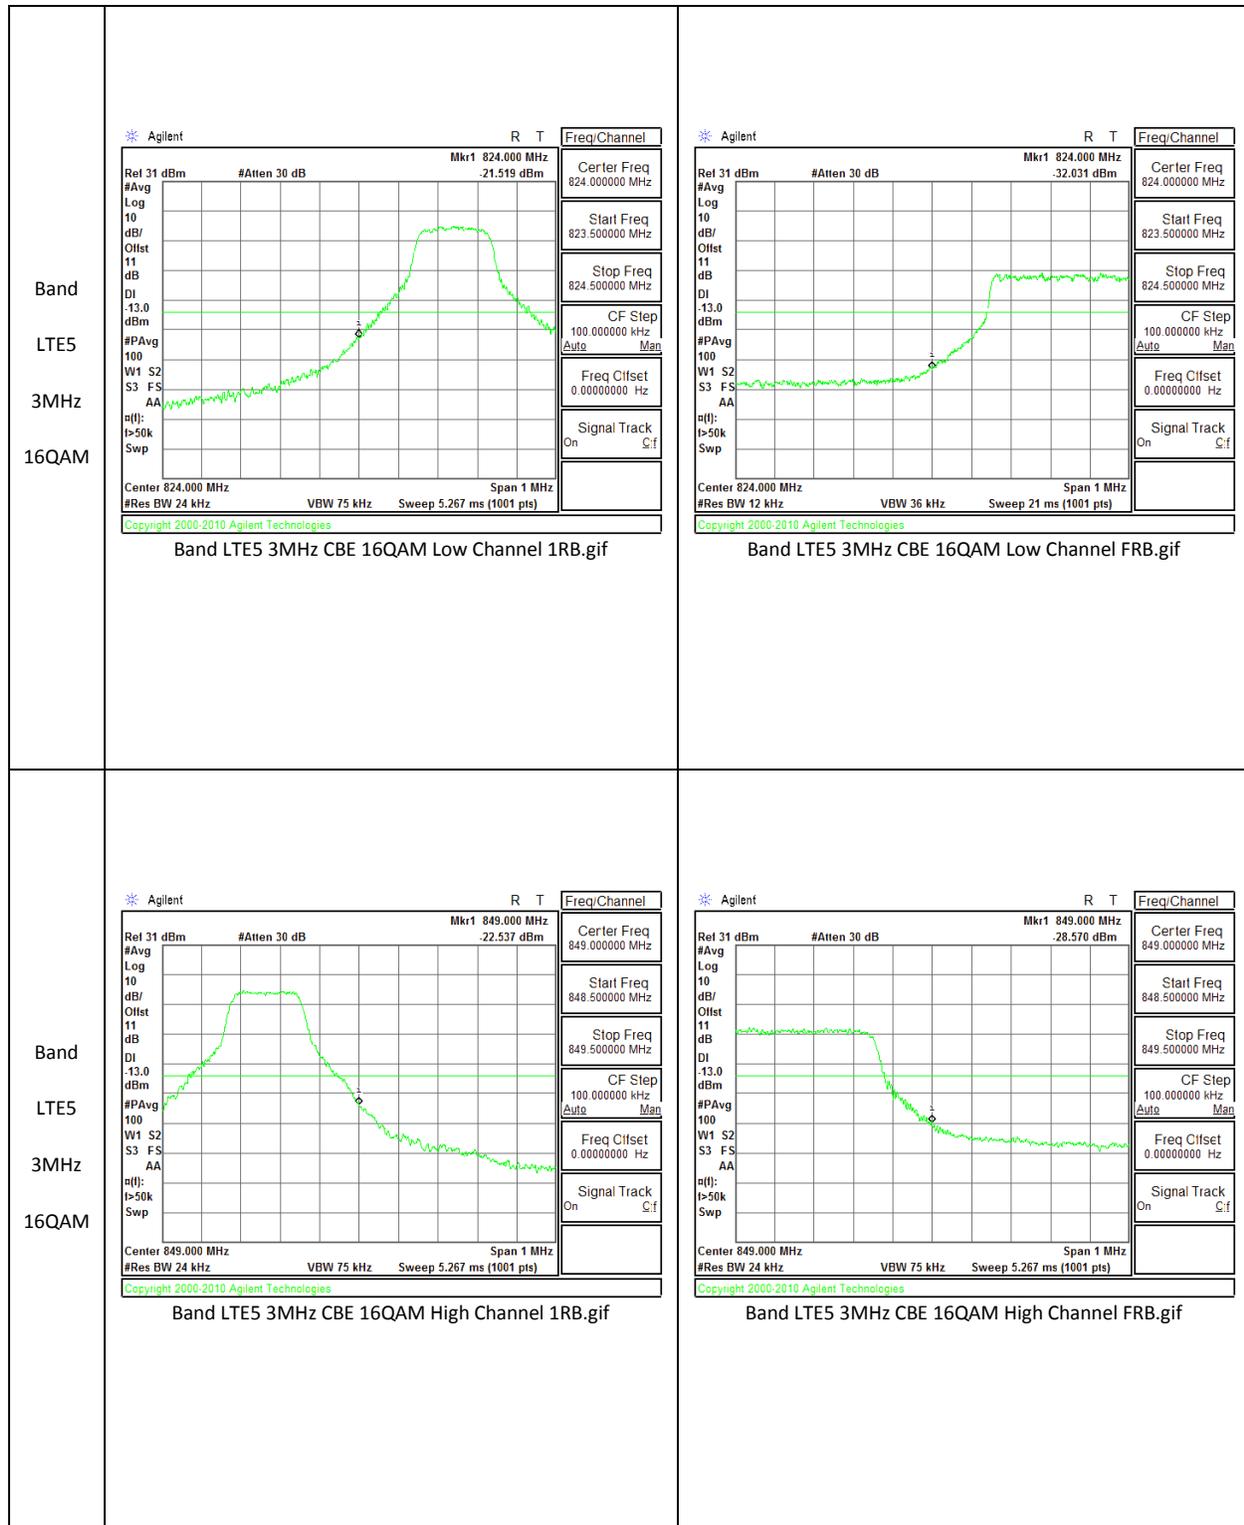


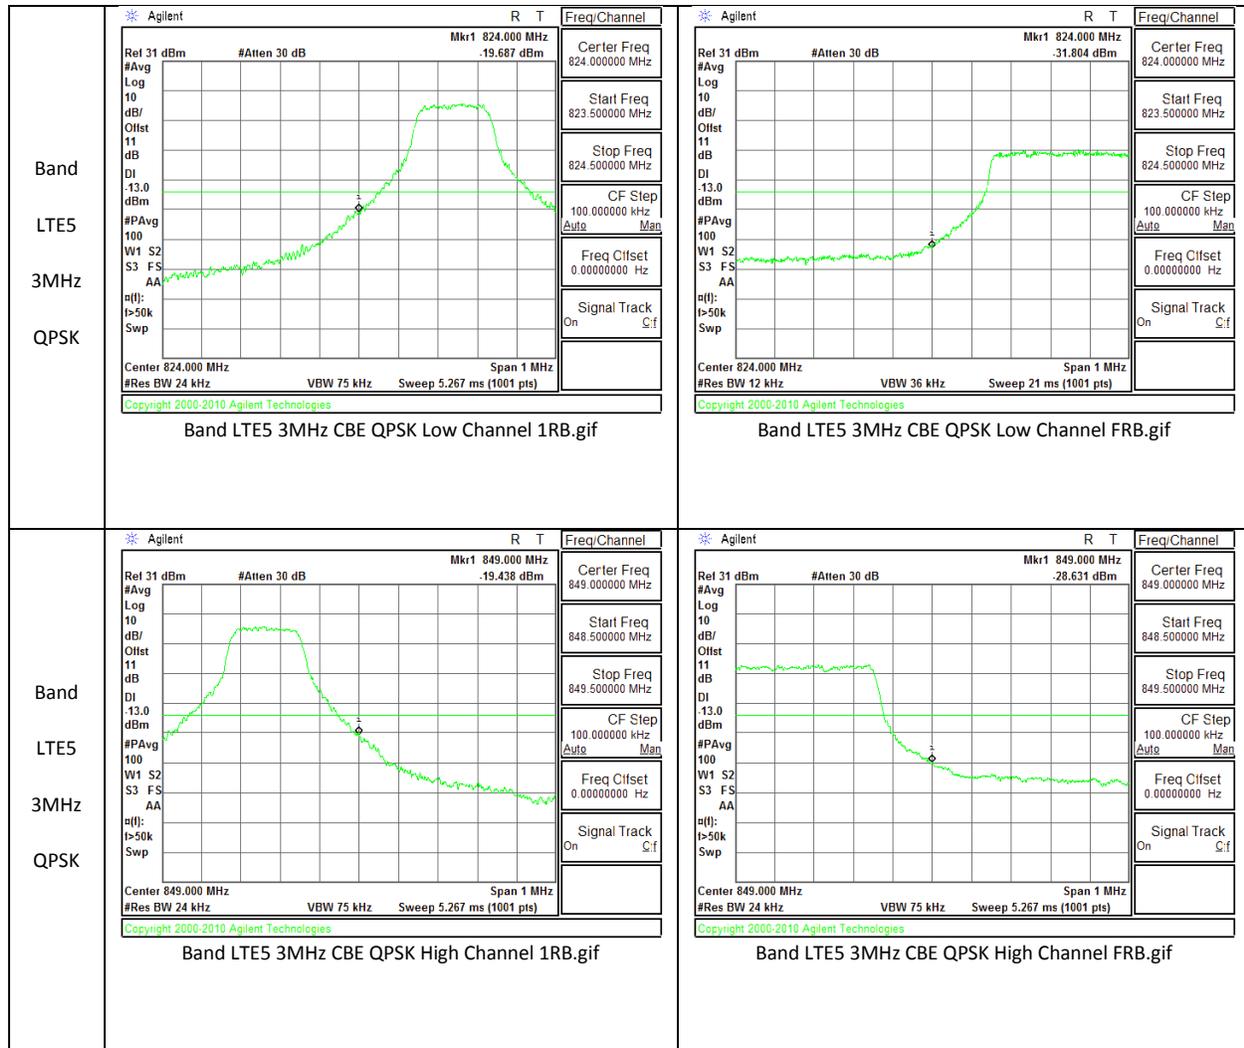


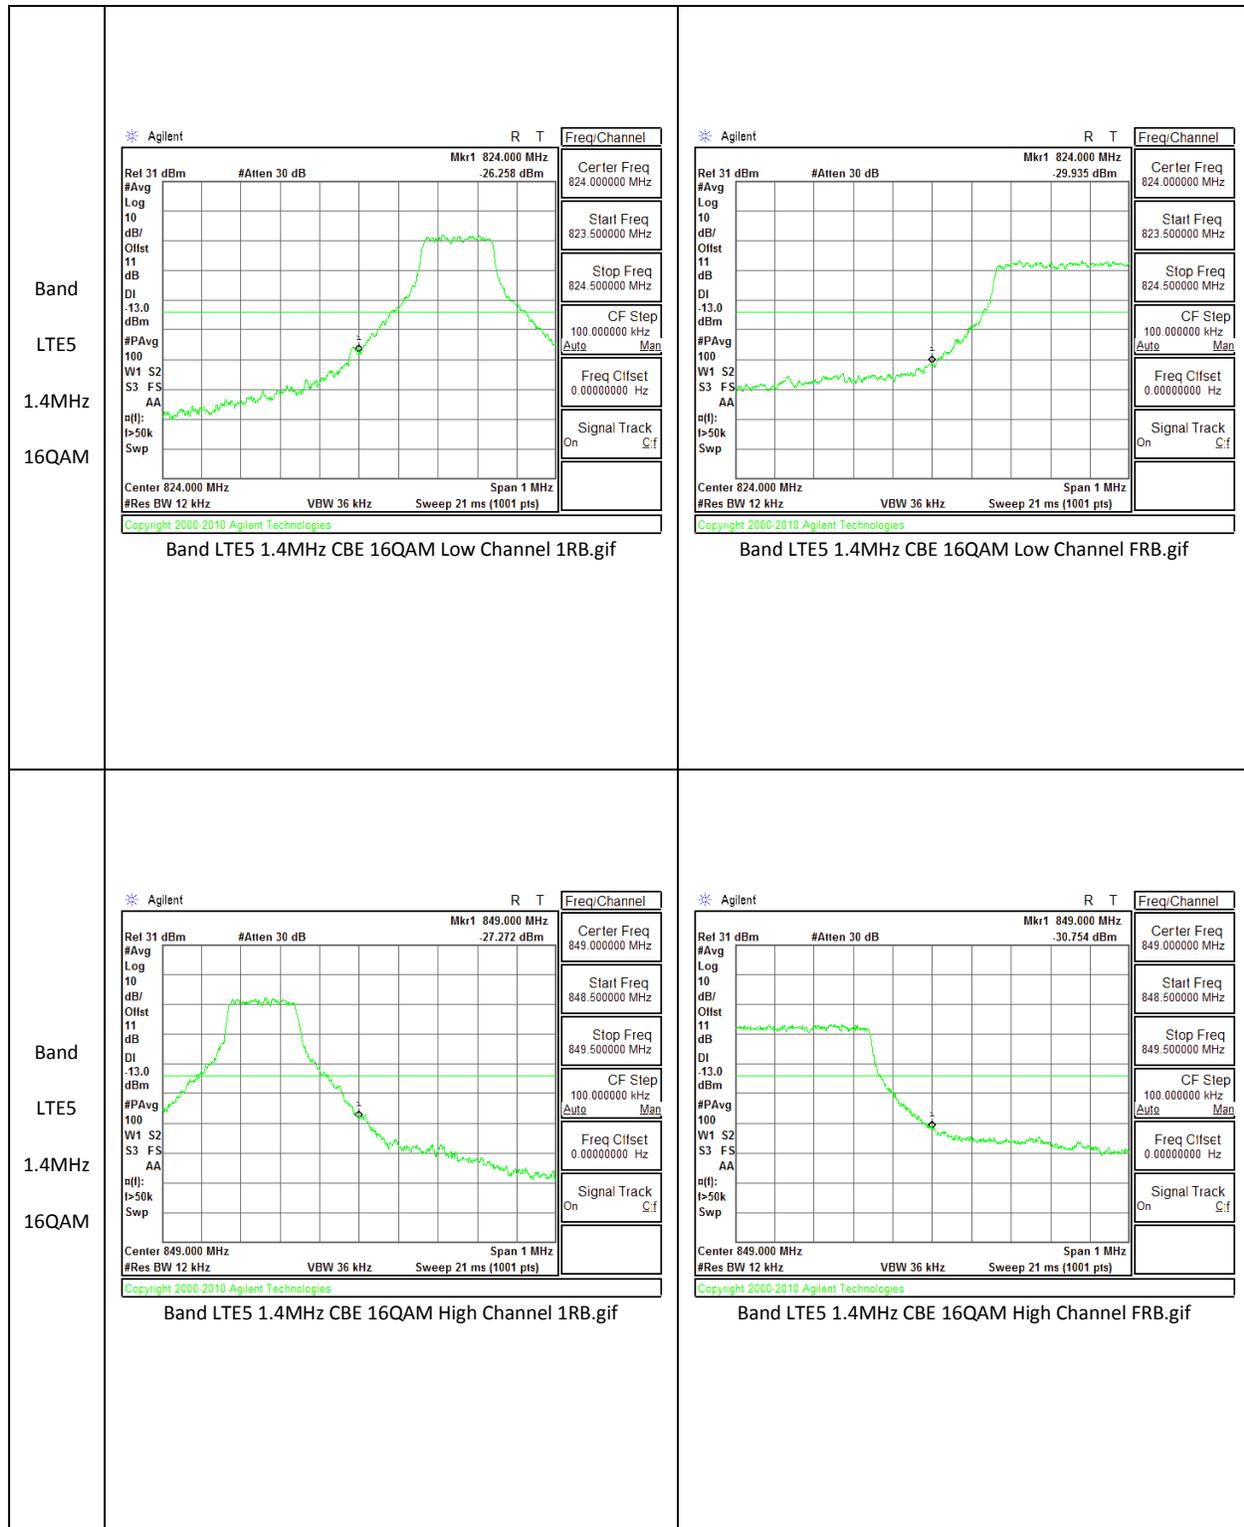


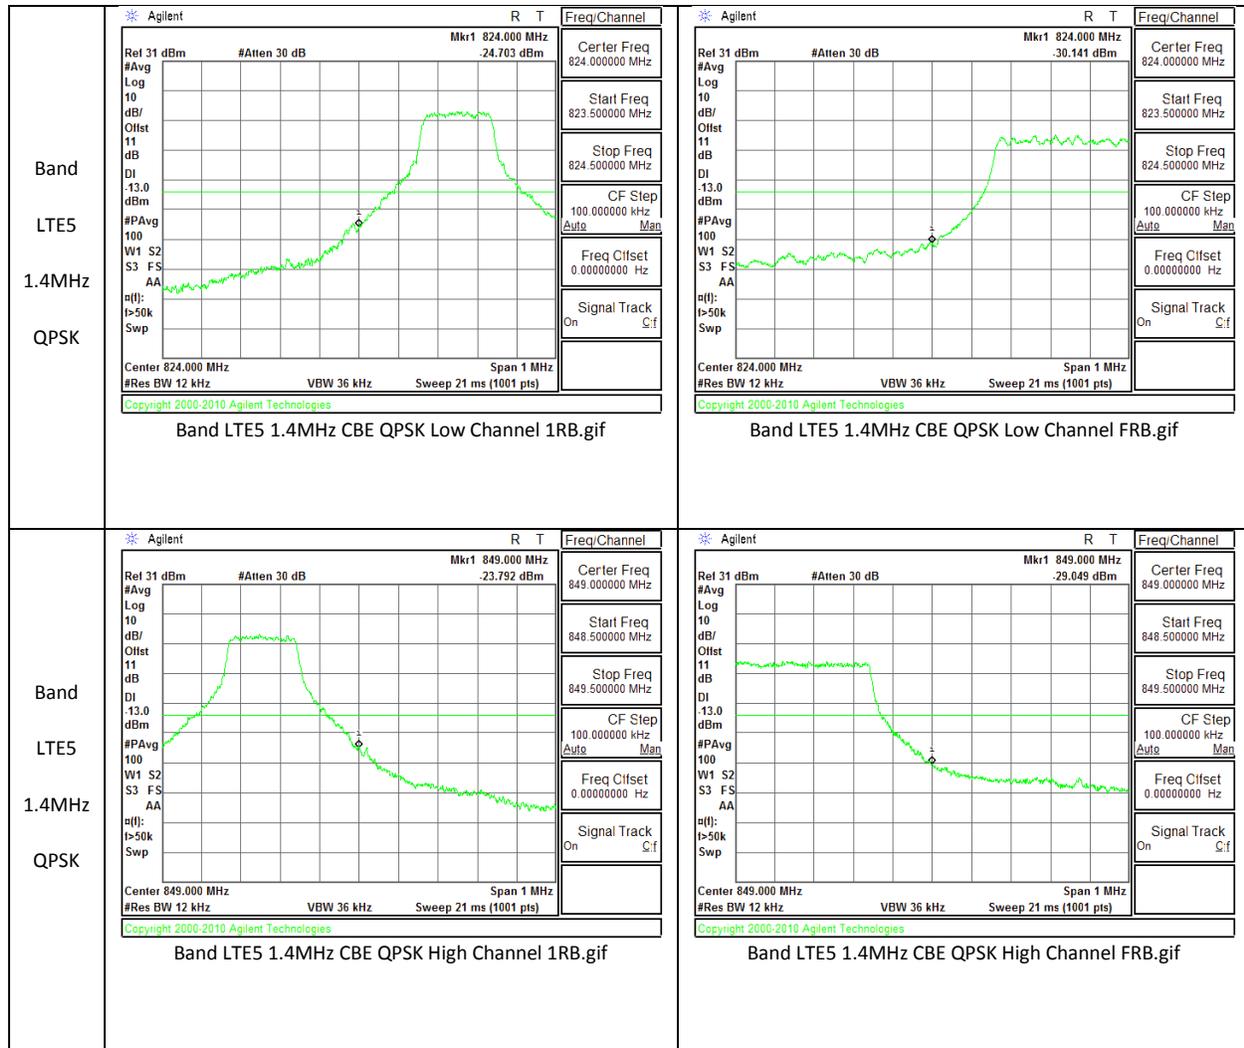


### 10.2.2. EMISSION MASK PLOTS

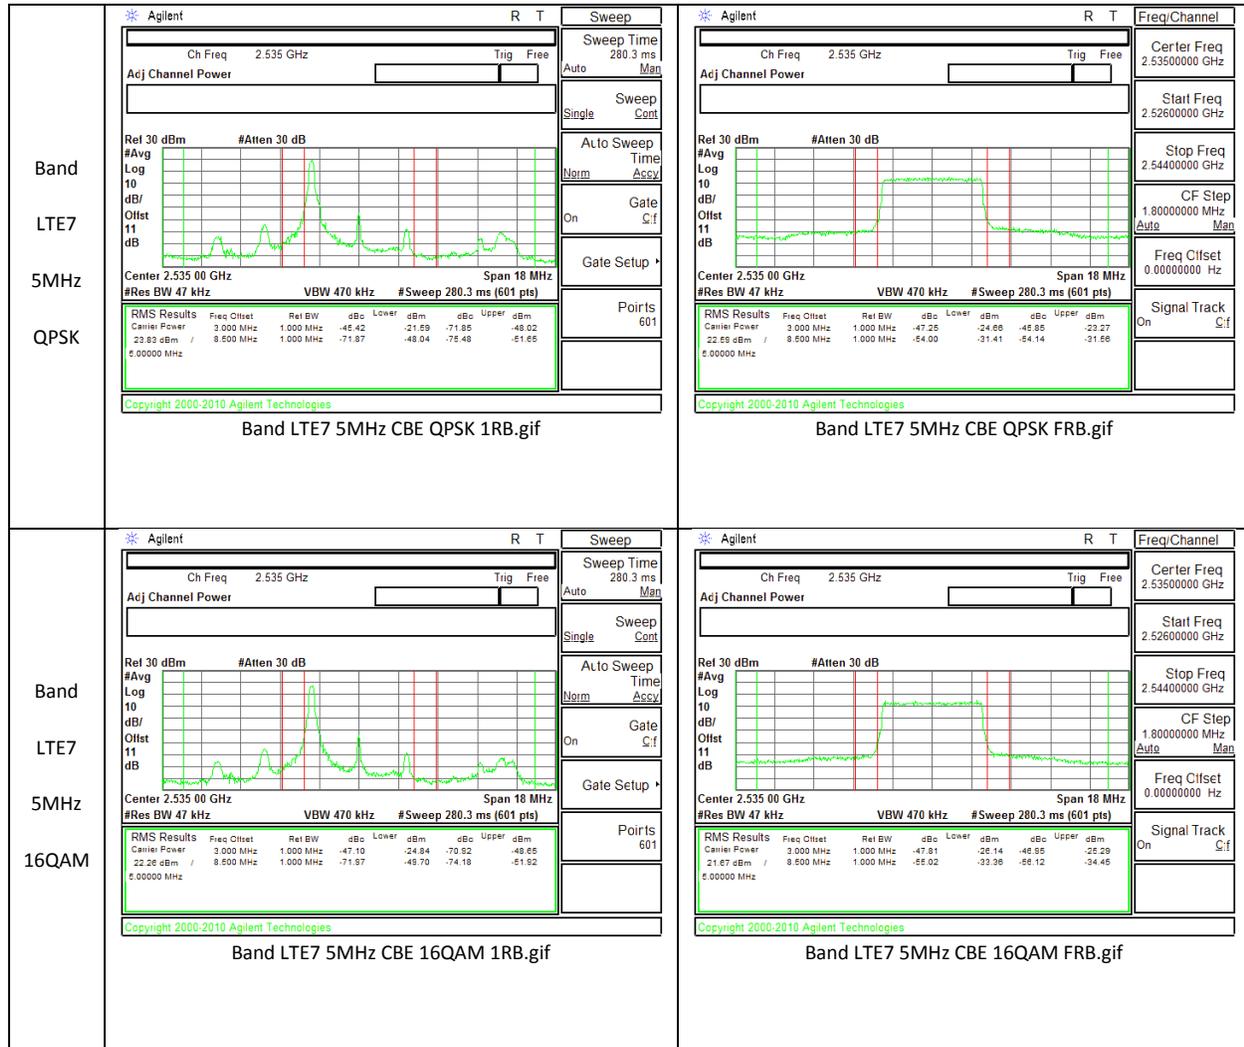

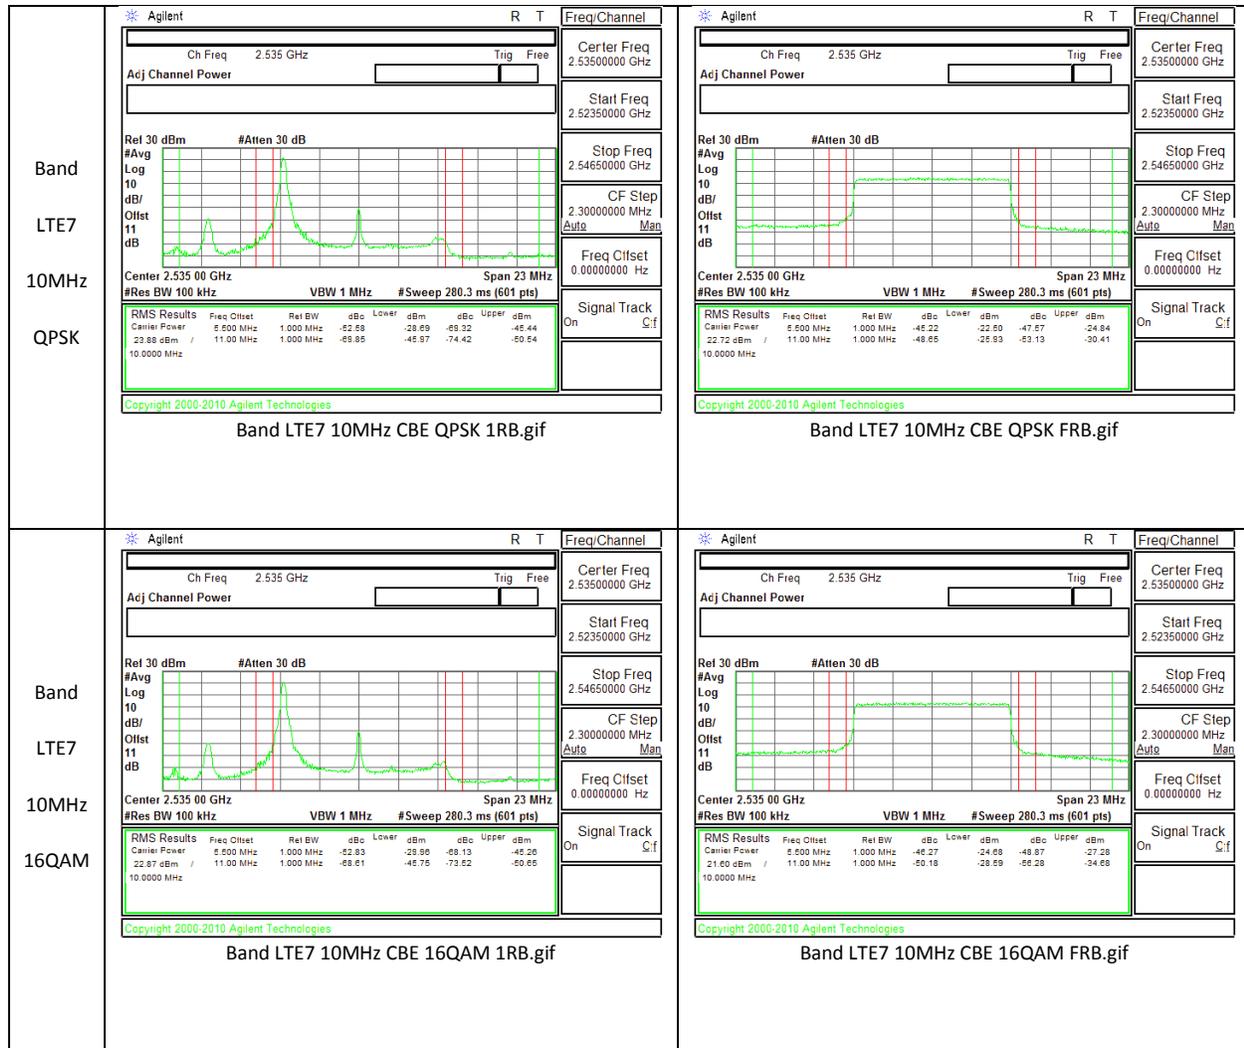

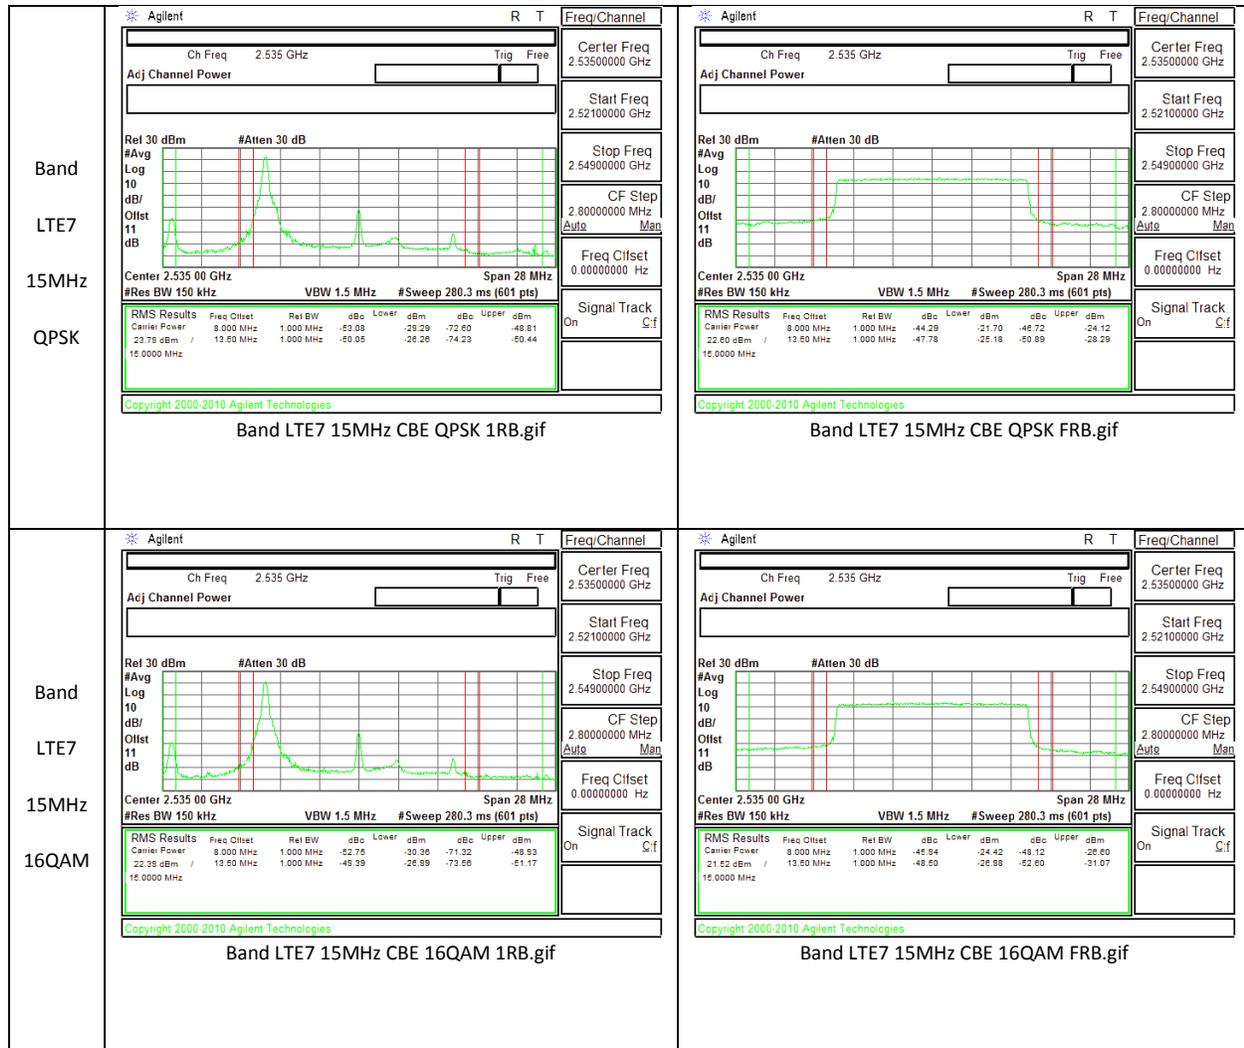

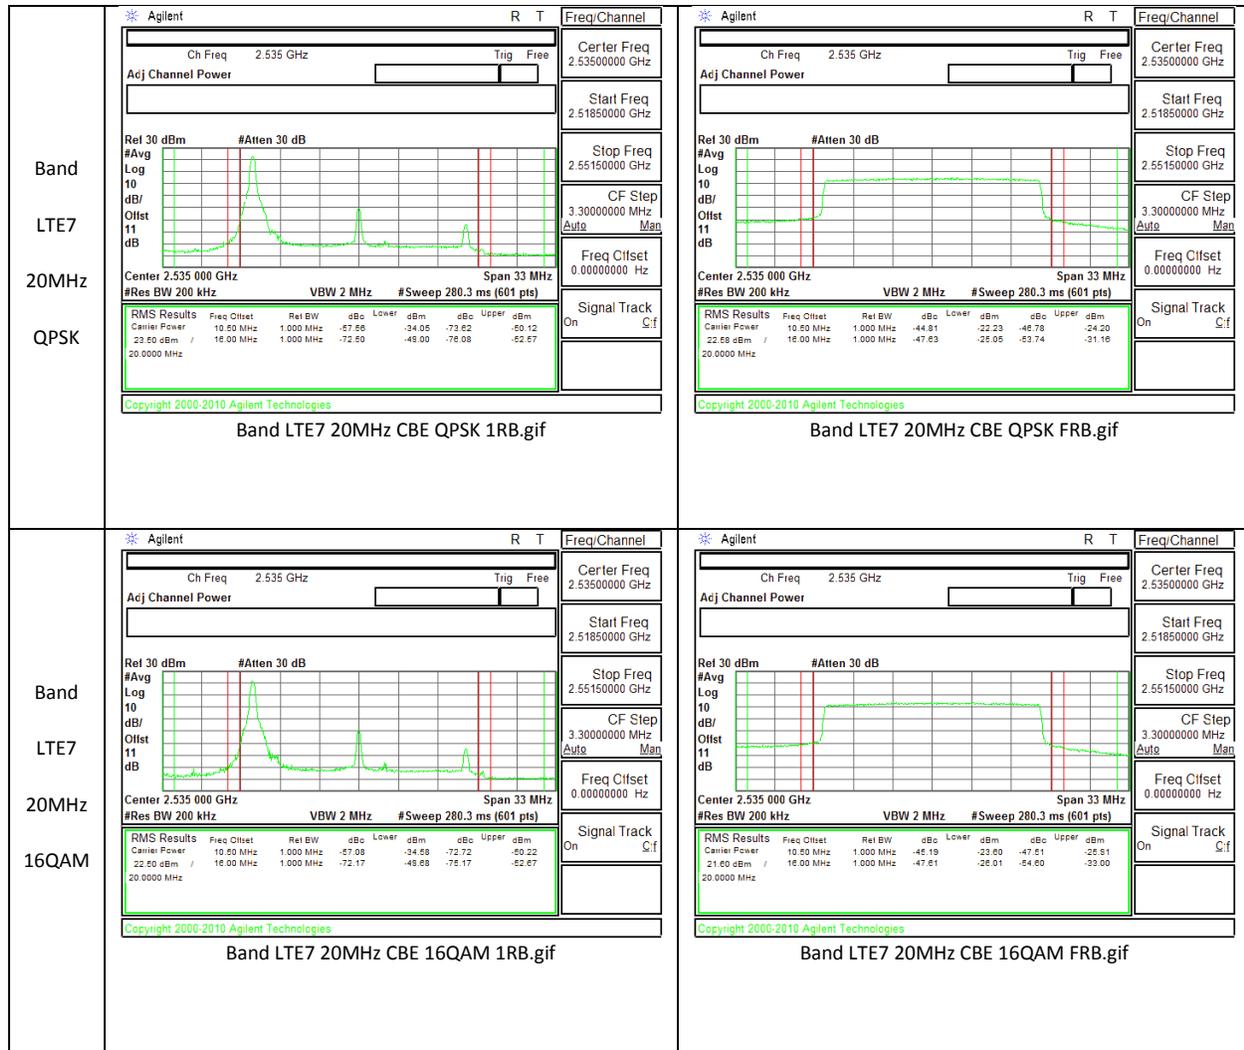

### **10.3. OUT OF BAND EMISSIONS**

#### **RULE PART(S)**

FCC: §2.1051, §22.901, §22.917, §24.238 and §27

#### **LIMITS**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

#### **TEST PROCEDURE**

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

#### **RESULTS**

**10.3.1. OUT OF BAND EMISSIONS RESULT**

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM850	GPRS	824.2	-19.83	-13	-6.83
		836.6	-19.54	-13	-6.54
		848.8	-19.89	-13	-6.89
	EGPRS	824.2	-21.59	-13	-8.59
		836.6	-19.90	-13	-6.90
		848.8	-20.31	-13	-7.31
GSM1900	GPRS	1850.2	-20.17	-13	-7.17
		1880	-20.30	-13	-7.30
		1909.8	-20.96	-13	-7.96
	EGPRS	1850.2	-20.58	-13	-7.58
		1880	-19.83	-13	-6.83
		1909.8	-20.38	-13	-7.38
Band 5	REL99	826.4	-20.66	-13	-7.66
		836.6	-19.33	-13	-6.33
		846.6	-20.39	-13	-7.39
	HSDPA	826.4	-20.86	-13	-7.86
		836.6	-20.43	-13	-7.43
		846.6	-20.93	-13	-7.93
Band 2	REL99	1852.4	-20.21	-13	-7.21
		1880	-21.12	-13	-8.12
		1907.6	-22.32	-13	-9.32
	HSDPA	1852.4	-19.99	-13	-6.99
		1880	-20.26	-13	-7.26
		1907.6	-19.93	-13	-6.93

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE7	20	QPSK	2510	-29.16	-25	-4.16
			2535	-28.74	-25	-3.74
			2560	-29.02	-25	-4.02
		16QAM	2510	-29	-25	-4
			2535	-29.1	-25	-4.1
			2560	-28.92	-25	-3.92

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE7	15	QPSK	2507.5	-30.68	-25	-5.68
			2535	-27.58	-25	-2.58
			2562.5	-28.97	-25	-3.97
		16QAM	2507.5	-30.24	-25	-5.24
			2535	-30.99	-25	-5.99
			2562.5	-28.49	-25	-3.49

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE7	10	QPSK	2505	-28.09	-25	-3.09
			2535	-27.01	-25	-2.01
			2565	-26.98	-25	-1.98
		16QAM	2505	-29.35	-25	-4.35
			2535	-27.06	-25	-2.06
			2565	-27.11	-25	-2.11

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE7	5	QPSK	2502.5	-36.07	-25	-11.07
			2535	-36.47	-25	-11.47
			2567.5	-36.84	-25	-11.84
		16QAM	2502.5	-35.91	-25	-10.91
			2535	-36.31	-25	-11.31

			2567.5	-34.75	-25	-9.75
--	--	--	--------	--------	-----	-------

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	10	QPSK	829	-34.17	-13	-21.17
			836.5	-35.64	-13	-22.64
			844	-35.07	-13	-22.07
		16QAM	829	-34.71	-13	-21.71
			836.5	-36.06	-13	-23.06
			844	-36.76	-13	-23.76

Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	5	QPSK	826.5	-36.82	-13	-23.82
			836.5	-37.44	-13	-24.44
			846.5	-36.44	-13	-23.44
		16QAM	826.5	-35.36	-13	-22.36
			836.5	-38.84	-13	-25.84
			846.5	-36.08	-13	-23.08


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	3	QPSK	825.5	-37.32	-13	-24.32
			836.5	-35.49	-13	-22.49
			847.5	-35.00	-13	-22.00
		16QAM	825.5	-35.05	-13	-22.05
			836.5	-36.42	-13	-23.42
			847.5	-36.72	-13	-23.72


Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	1.4	QPSK	824.7	-34.49	-13	-21.49
			836.5	-35.28	-13	-22.28
			848.3	-37.52	-13	-24.52
		16QAM	824.7	-36.57	-13	-23.57


---


			836.5	-35.27	-13	-22.27
			848.3	-35.03	-13	-22.03

**10.3.2. OUT OF BAND EMISSIONS PLOTS**

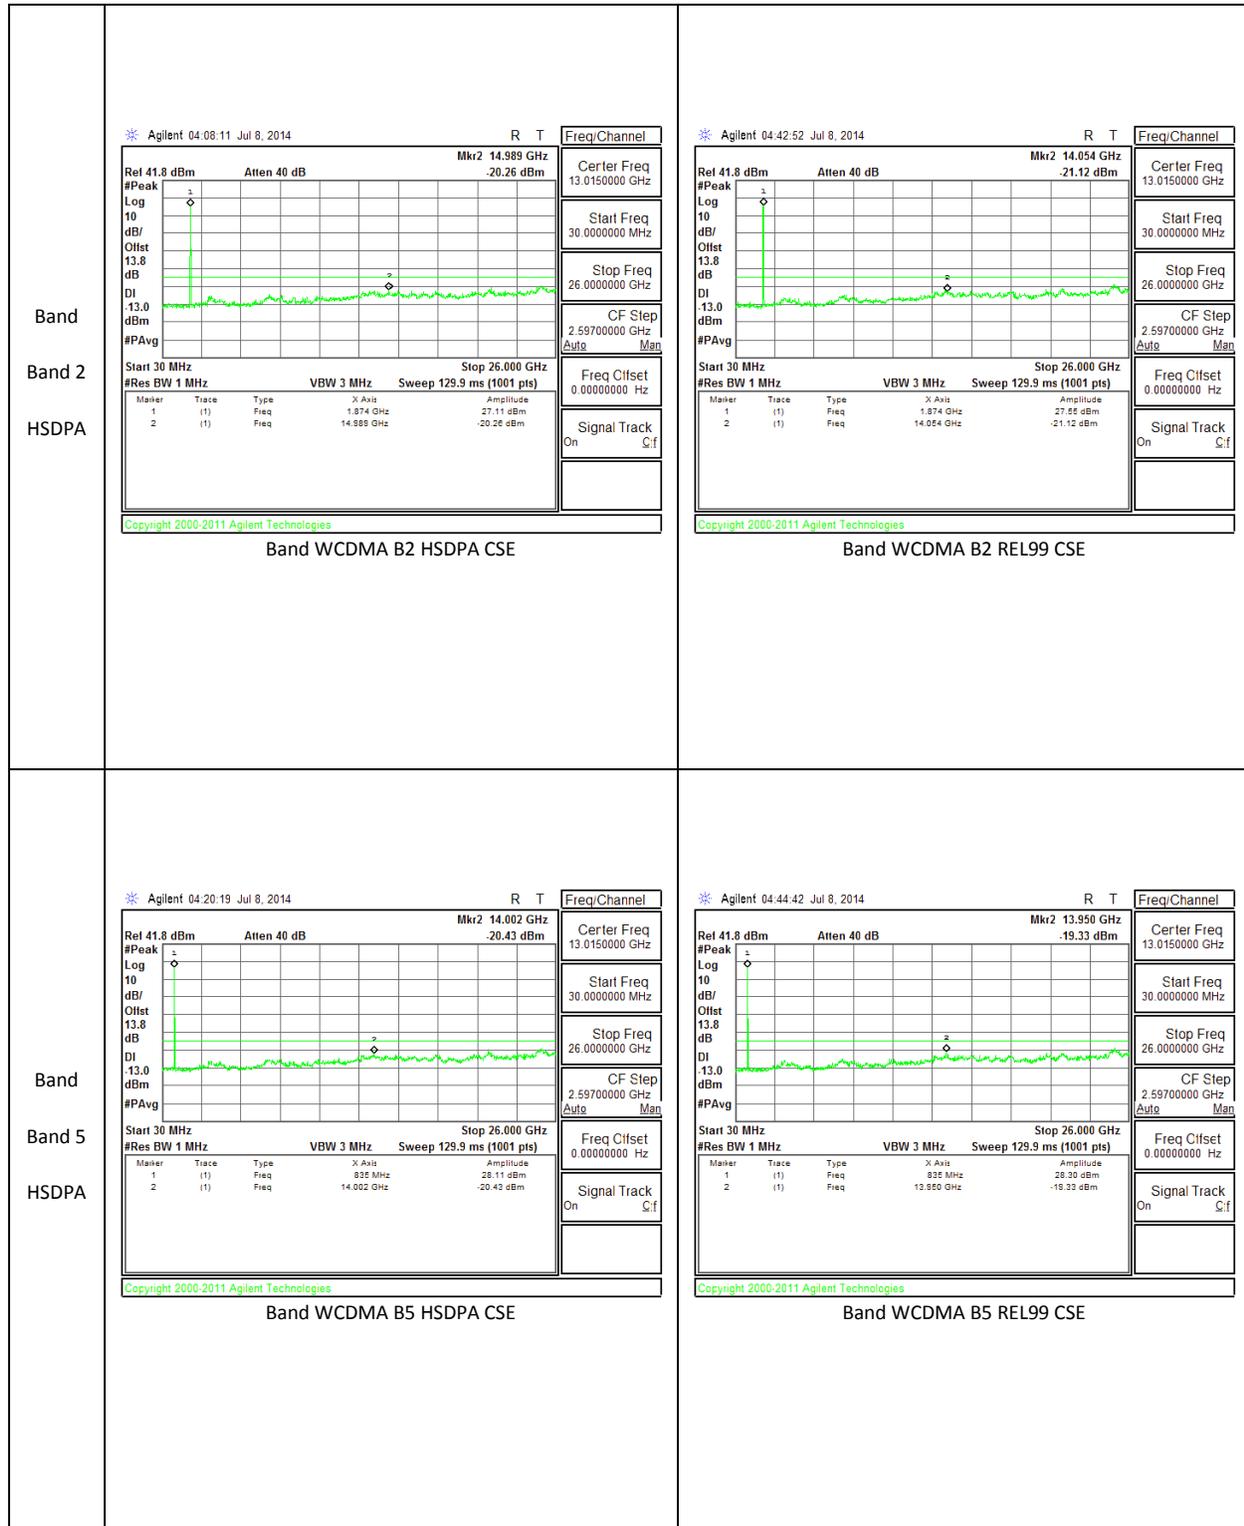



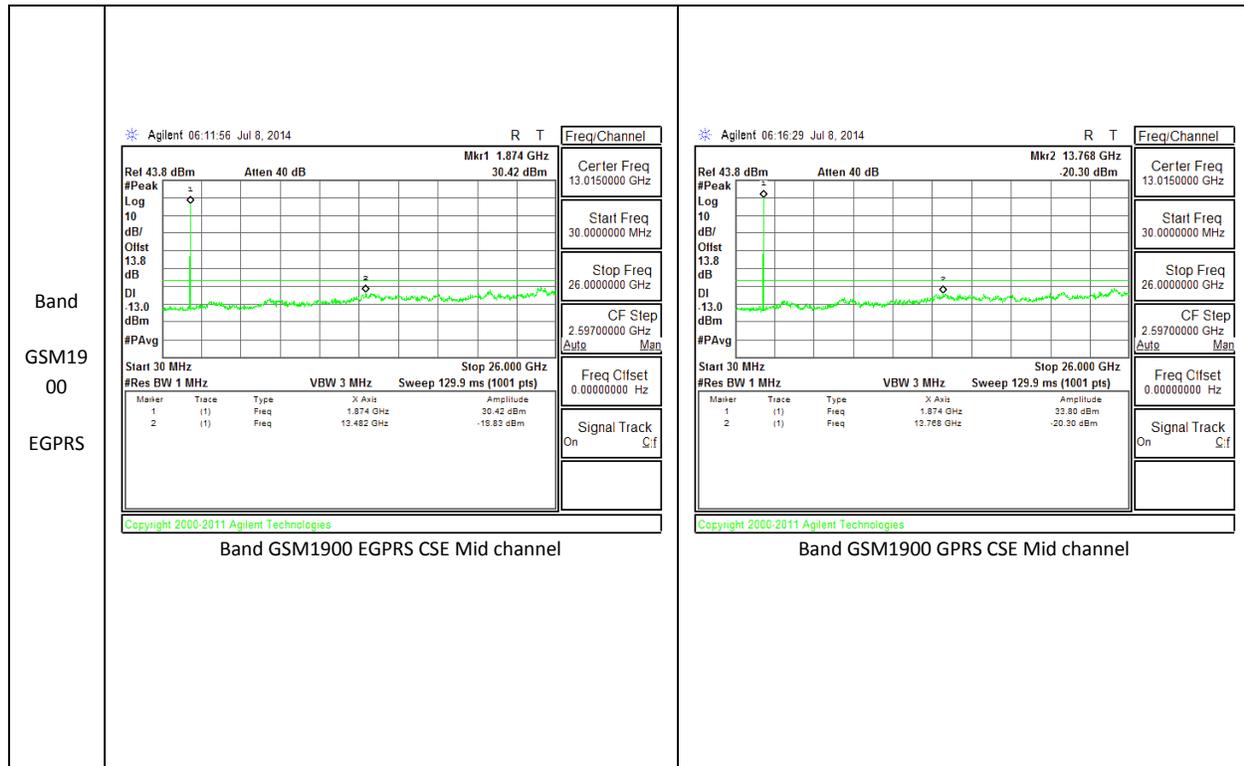


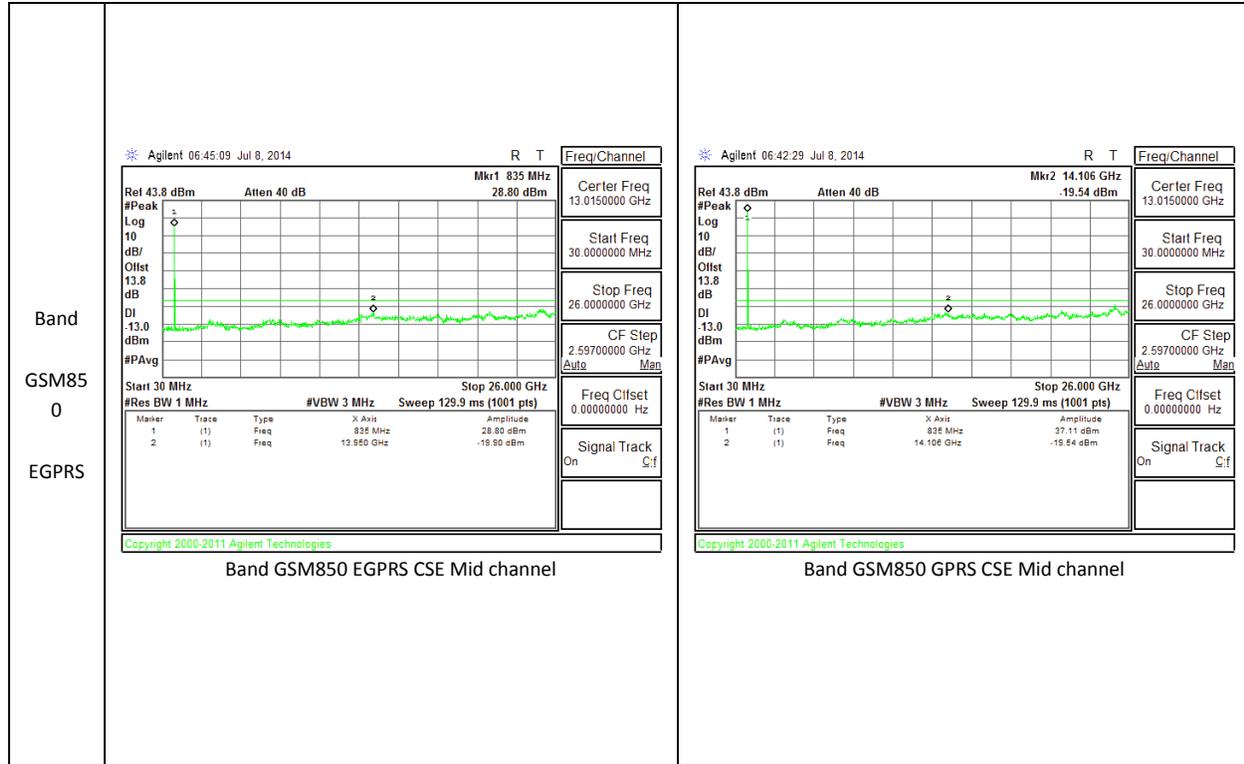

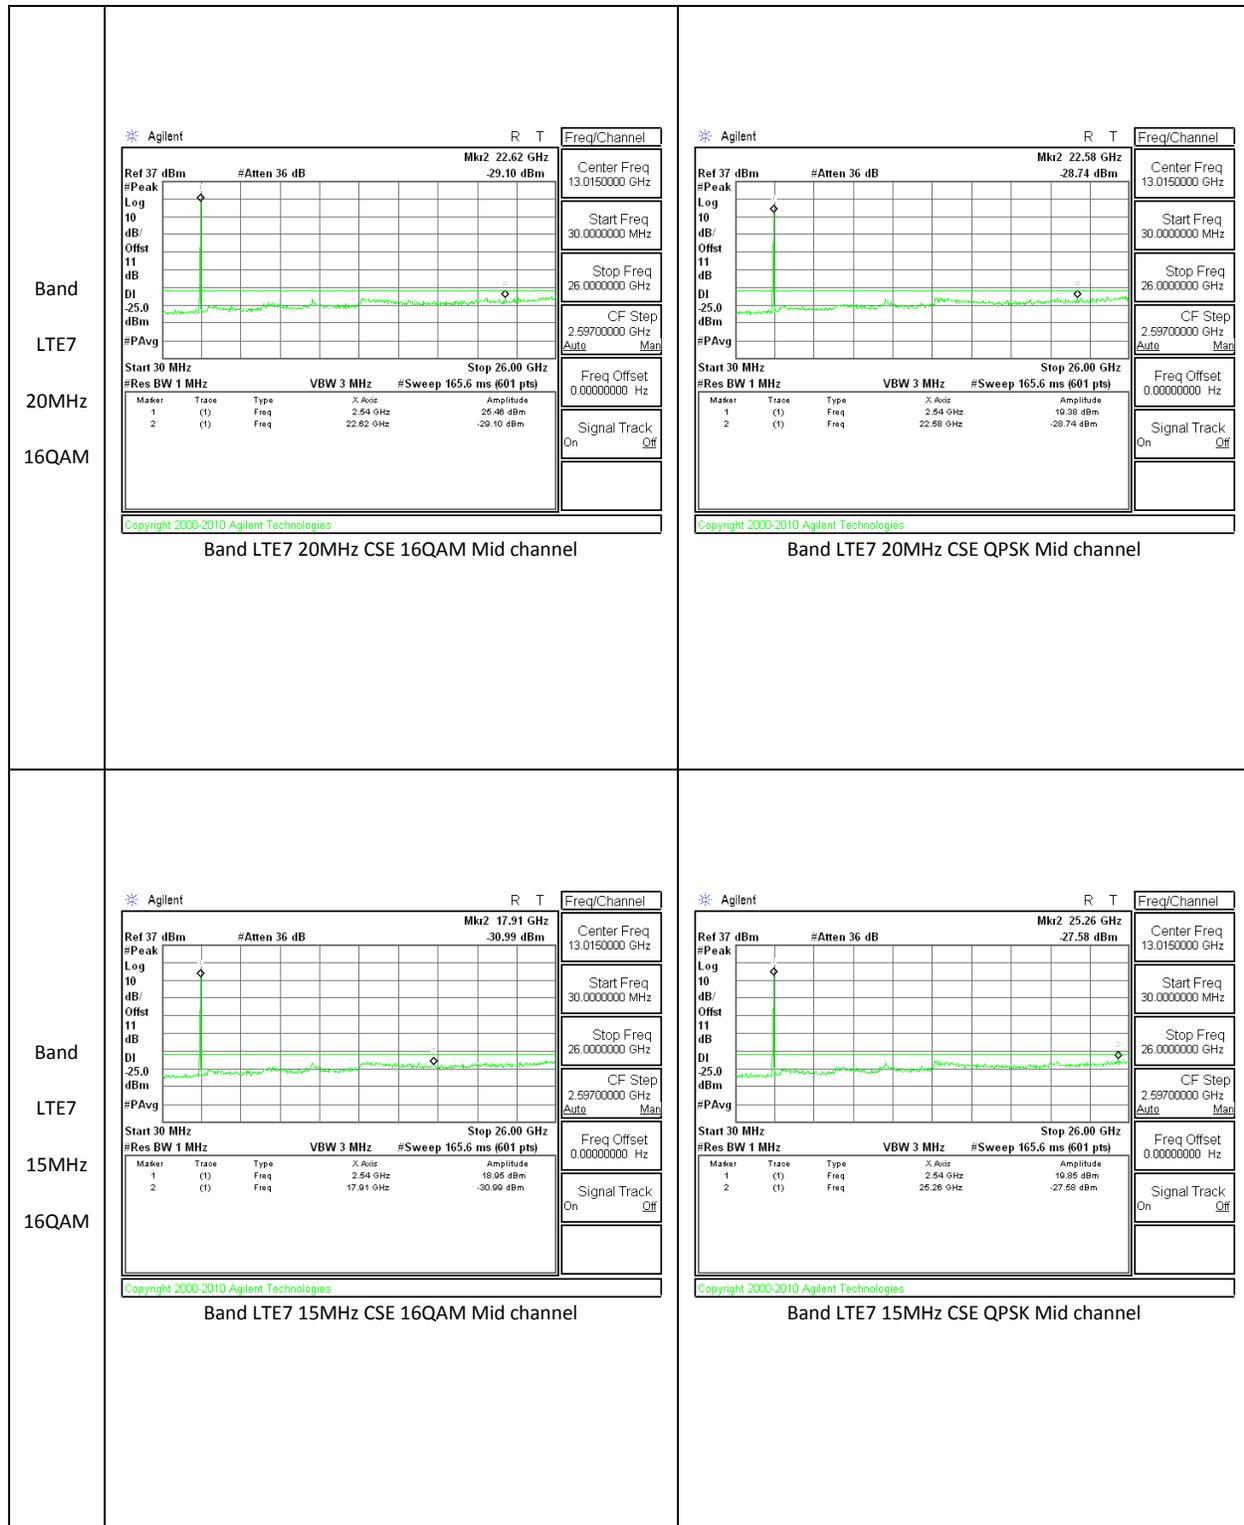



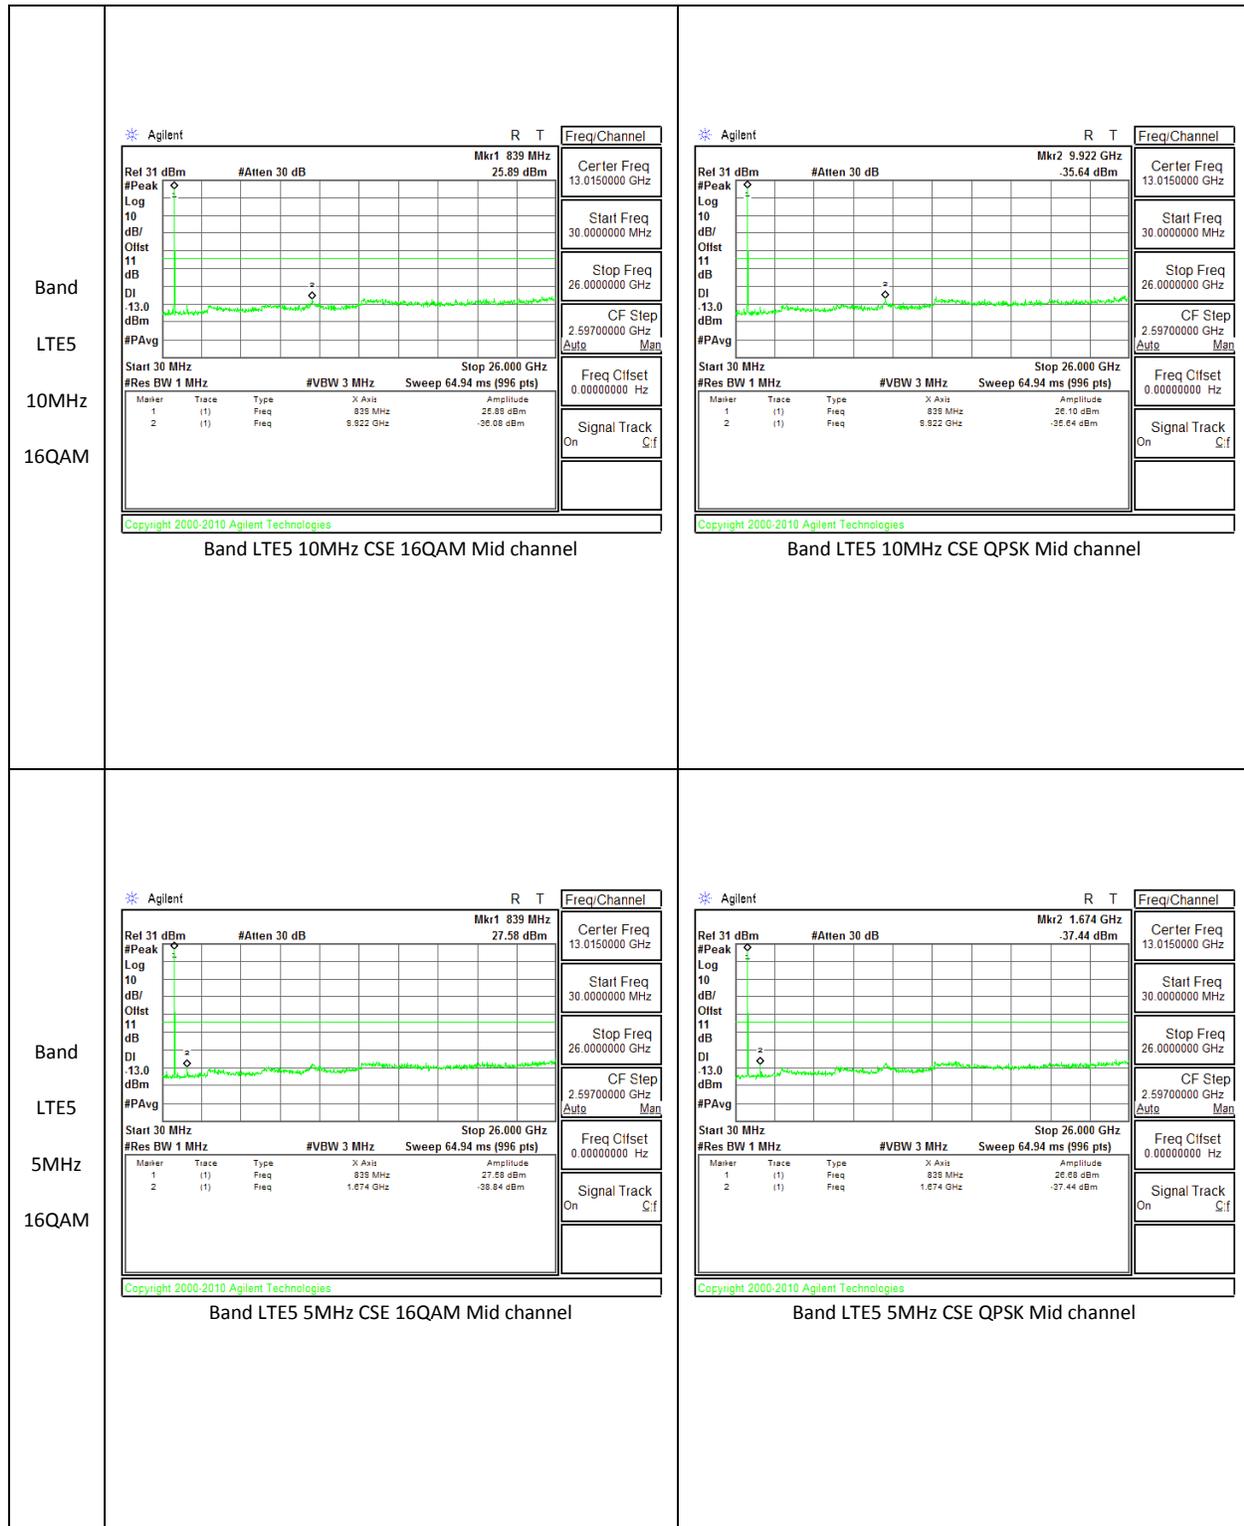

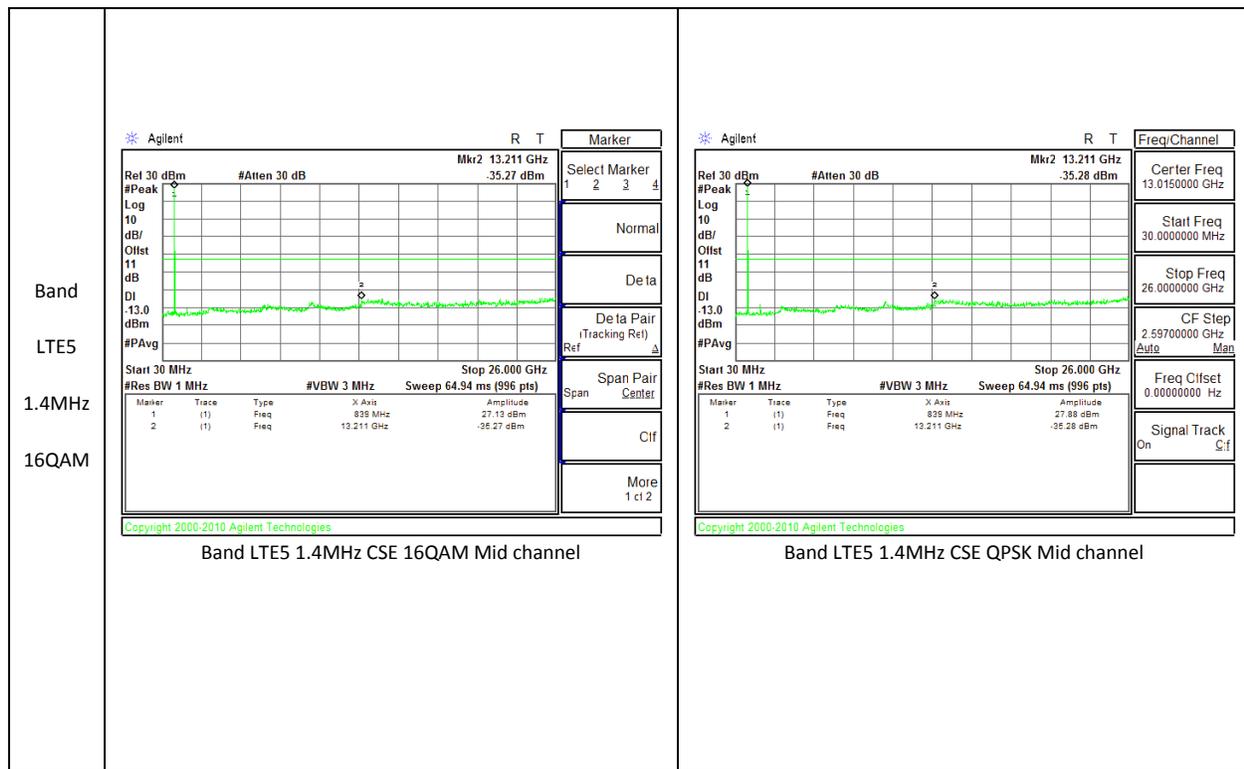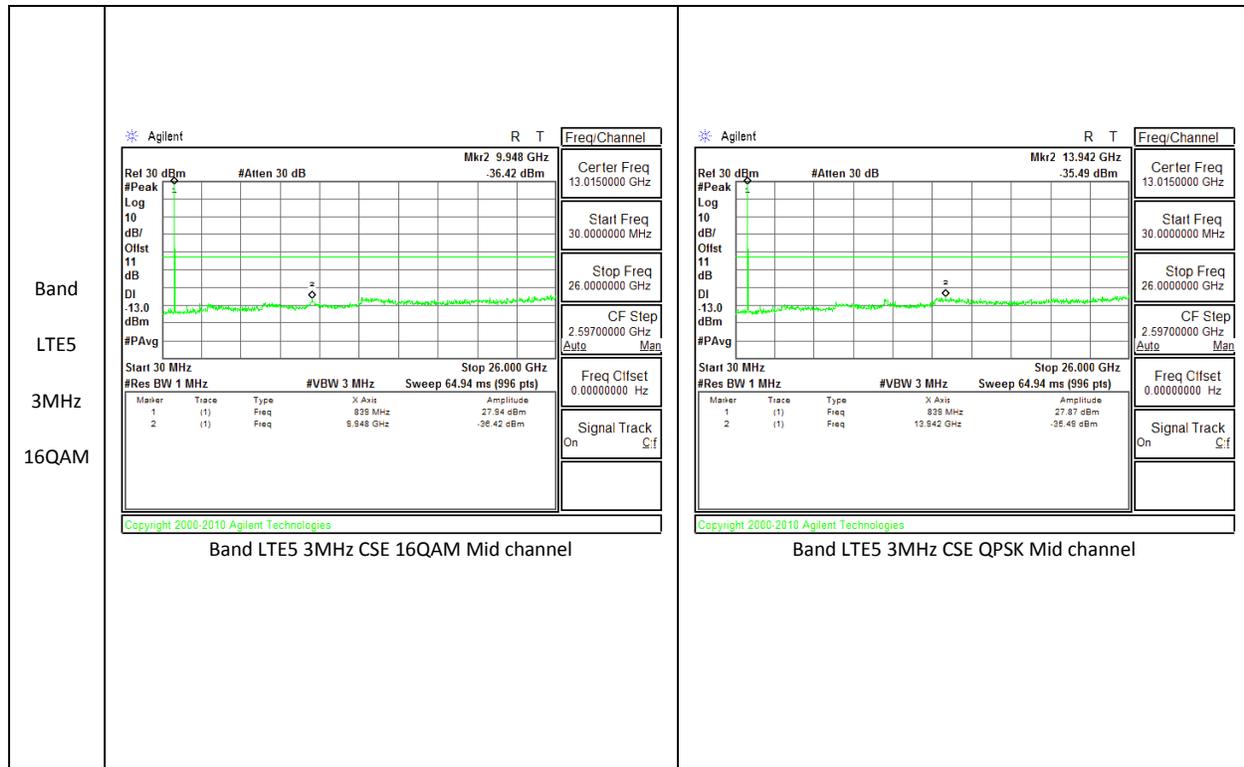

## 10.4. FREQUENCY STABILITY

### RULE PART(S)

FCC: §2.1055, §22.355, §24.235, and §27.54

### LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of  $\pm 2.5$  ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

### SOP

#### **Frequency Stability vs Temperature:**

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until +50°C is reached. Reference power supply voltage for these tests is 3.8Vdc.

#### **Frequency Stability vs Voltage:**

The peak frequency error is recorded (worst-case). The test voltage ranges from 3.42 to 4.18 VDC.

### RESULTS

See the following pages.

**10.4.1. FREQUENCY STABILITY RESULTS**

**BAND II, Channel 9400 Freq: 1880MHz– MID CHANNEL**

Reference Frequency: PCS Mid Channel 1880.000007MHz @ 20°C				
Limit: within the authorized block or +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1880.000020	-0.007	2.5
3.80	40	1880.000057	-0.027	2.5
3.80	30	1880.000016	-0.005	2.5
<b>3.80</b>	<b>20</b>	<b>1880.000007</b>	<b>0</b>	<b>2.5</b>
3.80	10	1880.000027	-0.011	2.5
3.80	0	1880.000095	-0.047	2.5
3.80	-10	1880.000048	-0.022	2.5
3.80	-20	1880.000042	-0.019	2.5
3.80	-30	1880.000058	-0.027	2.5

Reference Frequency: PCS Mid Channel 1880.000004MHz @ 20°C				
Limit: within the authorized block or +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
<b>3.80</b>	<b>20</b>	<b>1880.000007</b>	<b>0.00000</b>	<b>2.5</b>
4.18	20	1880.000006	0.00053	2.5
End Volt(3.42)	20	1880.000000	0.00372	2.5

**BAND V, Channel 4183, Freq: 836.6MHz – MID CHANNEL**

Reference Frequency: Cellular Mid Channel 836.600001MHz @ 20°C				
Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.599989	-0.026	2.5
3.80	40	836.599992	-0.030	2.5
3.80	30	836.599965	0.002	2.5
<b>3.80</b>	<b>20</b>	<b>836.599967</b>	<b>0</b>	<b>2.5</b>
3.80	10	836.600020	-0.063	2.5
3.80	0	836.600050	-0.099	2.5
3.80	-10	836.600015	-0.057	2.5
3.80	-20	836.600019	-0.062	2.5
3.80	-30	836.599977	-0.012	2.5

Reference Frequency: Cellular Mid Channel 836.600001MHz @ 20°C				
Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
<b>3.80</b>	<b>20</b>	<b>836.599967</b>	<b>0</b>	<b>2.5</b>
4.18	20	836.599962	0.006	2.5
End Volt(3.42)	20	836.599968	-0.001	2.5

LTE BAND 7, Channel 21100, Freq: 2535.0MHz – MID CHANNEL

Reference Frequency: Cellular Mid Channel 2535.999993 MHz @ 20°C				
Limit: to stay +/- 2.5 ppm = 6337.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	2534.999990	-0.009	2.5
3.80	40	2534.999992	-0.010	2.5
3.80	30	2534.999965	0.001	2.5
<b>3.80</b>	<b>20</b>	<b>2534.999967</b>	<b>0</b>	<b>2.5</b>
3.80	10	2535.000020	-0.021	2.5
3.80	0	2535.000050	-0.033	2.5
3.80	-10	2535.000015	-0.019	2.5
3.80	-20	2535.000019	-0.021	2.5
3.80	-30	2535.000023	-0.022	2.5

Reference Frequency: Cellular Mid Channel 2535.000012 MHz @ 20°C				
Limit: to stay +/- 2.5 ppm = 6337.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
<b>3.80</b>	<b>20</b>	<b>2534.999993</b>	<b>0</b>	<b>2.5</b>
4.18	20	2534.999987	0.002	2.5
End Volt(3.42)	20	2534.999987	0.002	2.5

## 11. RADIATED TEST RESULTS

### 11.1. RADIATED POWER (ERP & EIRP)

#### RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27

#### LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

#### TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17

#### TEST RESULTS

##### 11.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 2	REL99	9262	1852.4	20.66	116.41
		9400	1880	22.12	162.92
		9538	1907.6	21.77	150.31
	HSDPA	9262	1852.4	19.31	85.31
		9400	1880	21.86	153.46
		9538	1907.6	20.51	112.46

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 5	REL99	4132	826.4	21.21	132.12
		4183	836.6	21.85	153.10
		4233	846.6	21.75	149.62
	HSDPA	4132	826.4	21.77	149.86
		4183	836.6	21.82	152.05
		4233	846.6	21.40	138.03

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM1900	GPRS	512	1850.2	27.96	625.17
		661	1880	27.77	598.41
		810	1909.8	28.89	774.46
	EGPRS	512	1850.2	24.90	309.02
		661	1880	24.49	281.19
		810	1909.8	26.01	399.02

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GPRS	128	824.2	29.82	959.40
		190	836.6	30.52	1127.19
		251	848.8	30.53	1129.79
	EGPRS	128	824.2	28.05	638.26
		190	836.6	28.01	632.41
		251	848.8	28.48	704.69

**11.1.2. LTE ERP/EIRP Results**

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE7	20	QPSK	1/0	2510	21.19	131.52
			1/0	2535	20.16	103.75
			1/0	2560	19.81	95.71
		16QAM	1/0	2510	20.16	103.73
			1/0	2535	18.94	78.34
			1/0	2560	19.47	88.51

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE7	15	QPSK	1/0	2507.5	21.07	127.93
			1/0	2535	20.27	106.41
			1/0	2562.5	19.0	79.43
		16QAM	1/0	2507.5	20.79	119.94
			1/0	2535	18.60	72.44
			1/0	2562.5	17.90	61.65

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE7	10	QPSK	1/0	2505	21.09	128.52
			1/0	2535	19.97	99.31
			1/0	2565	19.50	89.12
		16QAM	1/0	2505	20.30	107.15
			1/0	2535	19.49	88.92
			1/0	2565	19.00	79.43

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE7	5	QPSK	1/0	2502.5	21.38	137.40
			1/0	2535	20.26	106.16
			1/0	2567.5	20.28	106.65
		16QAM	1/0	2502.5	20.30	107.15
			1/0	2535	19.10	81.28
			1/0	2567.5	19.50	89.12

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	10	QPSK	1/0	829	17.85	60.95
			1/0	836.5	17.90	61.65
			1/0	844	18.87	77.09
		16QAM	1/0	829	17.05	50.69
			1/0	836.5	16.70	46.77
			1/0	844	17.83	60.67

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	5	QPSK	1/0	826.5	17.57	57.14
			1/0	836.5	17.78	59.97
			1/0	846.5	18.58	72.11
		16QAM	1/0	826.5	16.53	44.97
			1/0	836.5	16.71	46.88
			1/0	846.5	17.35	54.32

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	3	QPSK	1/0	825.5	17.64	58.07
			1/0	836.5	18.09	64.41
			1/0	847.5	18.60	72.44
		16QAM	1/0	825.5	14.47	27.98
			1/0	836.5	15.57	36.05
			1/0	847.5	16.18	41.49

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	1.4	QPSK	1/0	824.7	16.67	46.45
			1/0	836.5	17.77	59.84
			1/0	848.3	18.64	73.11
		16QAM	1/0	824.7	15.85	38.45
			1/0	836.5	16.72	46.98
			1/0	848.3	17.74	59.42

**11.1.3. ERP/EIRP DATA**

Band Band 2 HSDPA	<b>High Frequency Fundamental Measurement Compliance Certification Services Chamber C</b>								
	<b>Company:</b>		Sony						
	<b>Project #:</b>		14U17927						
	<b>Date:</b>		07/08/14						
	<b>Test Engineer:</b>		R. Alegre/Jude S./ Eric B.						
	<b>Configuration:</b>		EUT only X position						
	<b>Mode:</b>		WCDMA_1900 MHz_HSDPA						
	<b>Test Equipment:</b>								
	Receiving: Horn T119, and Chamber C SMA Cables								
	Substitution: Horn T72 Substitution, 4ft SMA Cable Warehouse								
	<b>f</b>	<b>SG reading</b>	<b>Ant. Pol.</b>	<b>Cable Loss</b>	<b>Antenna Gain</b>	<b>EIRP</b>	<b>Limit</b>	<b>Margin</b>	<b>Notes</b>
	<b>MHz</b>	<b>(dBm)</b>	<b>(H/V)</b>	<b>(dB)</b>	<b>(dBi)</b>	<b>(dBm)</b>	<b>(dBm)</b>	<b>(dB)</b>	
	<b>Low Ch</b>								
	1852.40	1.07	V	0.85	7.9	8.12	33.0	-24.9	
	1852.40	12.26	H	0.85	7.9	19.31	33.0	-13.7	
	<b>Mid Ch</b>								
	1880.00	5.71	V	0.85	7.9	12.76	33.0	-20.2	
	1880.00	14.81	H	0.85	7.9	21.86	33.0	-11.1	
	<b>High Ch</b>								
	1907.60	4.00	V	0.85	7.9	11.05	33.0	-22.0	
	1907.60	13.46	H	0.85	7.9	20.51	33.0	-12.5	
	Rev. 3.17.11								
	Note: For Band 4 EIRP limit is 30dBm								

Band Band 2 REL99	<b>High Frequency Fundamental Measurement          Compliance Certification Services Chamber C</b>																																																																																																		
	<b>Company:</b>		Sony																																																																																																
	<b>Project #:</b>		14U17927																																																																																																
	<b>Date:</b>		07/08/14																																																																																																
	<b>Test Engineer:</b>		R. Alegre/Jude S./ Eric B.																																																																																																
	<b>Configuration:</b>		EUT only X position																																																																																																
	<b>Mode:</b>		WCDMA_REL 99_1900MHz																																																																																																
	<b>Test Equipment:</b>		Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T72 Substitution, 4ft SMA Cable Warehouse																																																																																																
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9"><b>Low Ch</b></td> </tr> <tr> <td>1852.40</td> <td>8.74</td> <td>V</td> <td>0.85</td> <td>7.9</td> <td>15.79</td> <td>33.0</td> <td>-17.2</td> <td></td> </tr> <tr> <td>1852.40</td> <td>13.61</td> <td>H</td> <td>0.85</td> <td>7.9</td> <td>20.66</td> <td>33.0</td> <td>-12.3</td> <td></td> </tr> <tr> <td colspan="9"><b>Mid Ch</b></td> </tr> <tr> <td>1880.00</td> <td>10.12</td> <td>V</td> <td>0.85</td> <td>7.9</td> <td>17.17</td> <td>33.0</td> <td>-15.8</td> <td></td> </tr> <tr> <td>1880.00</td> <td>15.07</td> <td>H</td> <td>0.85</td> <td>7.9</td> <td>22.12</td> <td>33.0</td> <td>-10.9</td> <td></td> </tr> <tr> <td colspan="9"><b>High Ch</b></td> </tr> <tr> <td>1907.60</td> <td>9.72</td> <td>V</td> <td>0.85</td> <td>7.9</td> <td>16.77</td> <td>33.0</td> <td>-16.2</td> <td></td> </tr> <tr> <td>1907.60</td> <td>14.72</td> <td>H</td> <td>0.85</td> <td>7.9</td> <td>21.77</td> <td>33.0</td> <td>-11.2</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	<b>Low Ch</b>									1852.40	8.74	V	0.85	7.9	15.79	33.0	-17.2		1852.40	13.61	H	0.85	7.9	20.66	33.0	-12.3		<b>Mid Ch</b>									1880.00	10.12	V	0.85	7.9	17.17	33.0	-15.8		1880.00	15.07	H	0.85	7.9	22.12	33.0	-10.9		<b>High Ch</b>									1907.60	9.72	V	0.85	7.9	16.77	33.0	-16.2		1907.60	14.72	H	0.85	7.9	21.77	33.0	-11.2	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
<b>Low Ch</b>																																																																																																			
1852.40	8.74	V	0.85	7.9	15.79	33.0	-17.2																																																																																												
1852.40	13.61	H	0.85	7.9	20.66	33.0	-12.3																																																																																												
<b>Mid Ch</b>																																																																																																			
1880.00	10.12	V	0.85	7.9	17.17	33.0	-15.8																																																																																												
1880.00	15.07	H	0.85	7.9	22.12	33.0	-10.9																																																																																												
<b>High Ch</b>																																																																																																			
1907.60	9.72	V	0.85	7.9	16.77	33.0	-16.2																																																																																												
1907.60	14.72	H	0.85	7.9	21.77	33.0	-11.2																																																																																												
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm																																																																																																			



Band Band 5 REL99	<b>High Frequency Fundamental Measurement          Compliance Certification Services Chamber C</b>																																																																																																	
	<b>Company:</b>		Sony																																																																																															
	<b>Project #:</b>		14U17927																																																																																															
	<b>Date:</b>		07/09/14																																																																																															
	<b>Test Engineer:</b>		K. Ros/ R. Yu																																																																																															
	<b>Configuration:</b>		EUT only Y position																																																																																															
	<b>Mode:</b>		WCDMA_REL 99_B5																																																																																															
	<b>Test Equipment:</b>																																																																																																	
			Receiving: Horn T119, and Chamber C SMA Cables																																																																																															
			Substitution: Horn T72 Substitution, 4ft SMA Cable Warehouse																																																																																															
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9"><b>Low Ch</b></td> </tr> <tr> <td>826.40</td> <td>15.17</td> <td>V</td> <td>0.50</td> <td>0.0</td> <td>14.67</td> <td>38.5</td> <td>-23.8</td> <td></td> </tr> <tr> <td>826.40</td> <td>21.71</td> <td>H</td> <td>0.50</td> <td>0.0</td> <td>21.21</td> <td>38.5</td> <td>-17.3</td> <td></td> </tr> <tr> <td colspan="9"><b>Mid Ch</b></td> </tr> <tr> <td>836.60</td> <td>15.64</td> <td>V</td> <td>0.50</td> <td>0.0</td> <td>15.14</td> <td>38.5</td> <td>-23.4</td> <td></td> </tr> <tr> <td>836.60</td> <td>22.35</td> <td>H</td> <td>0.50</td> <td>0.0</td> <td>21.85</td> <td>38.5</td> <td>-16.6</td> <td></td> </tr> <tr> <td colspan="9"><b>High Ch</b></td> </tr> <tr> <td>846.60</td> <td>12.71</td> <td>V</td> <td>0.50</td> <td>0.0</td> <td>12.21</td> <td>38.5</td> <td>-26.3</td> <td></td> </tr> <tr> <td>846.60</td> <td>22.25</td> <td>H</td> <td>0.50</td> <td>0.0</td> <td>21.75</td> <td>38.5</td> <td>-16.8</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	<b>Low Ch</b>									826.40	15.17	V	0.50	0.0	14.67	38.5	-23.8		826.40	21.71	H	0.50	0.0	21.21	38.5	-17.3		<b>Mid Ch</b>									836.60	15.64	V	0.50	0.0	15.14	38.5	-23.4		836.60	22.35	H	0.50	0.0	21.85	38.5	-16.6		<b>High Ch</b>									846.60	12.71	V	0.50	0.0	12.21	38.5	-26.3		846.60	22.25	H	0.50	0.0	21.75	38.5	-16.8	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
<b>Low Ch</b>																																																																																																		
826.40	15.17	V	0.50	0.0	14.67	38.5	-23.8																																																																																											
826.40	21.71	H	0.50	0.0	21.21	38.5	-17.3																																																																																											
<b>Mid Ch</b>																																																																																																		
836.60	15.64	V	0.50	0.0	15.14	38.5	-23.4																																																																																											
836.60	22.35	H	0.50	0.0	21.85	38.5	-16.6																																																																																											
<b>High Ch</b>																																																																																																		
846.60	12.71	V	0.50	0.0	12.21	38.5	-26.3																																																																																											
846.60	22.25	H	0.50	0.0	21.75	38.5	-16.8																																																																																											
Rev. 3.17.11																																																																																																		



Band  GSM19 00  GPRS	<b>High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C</b>																																																																																																		
	<b>Company:</b>		Sony																																																																																																
	<b>Project #:</b>		14U17927																																																																																																
	<b>Date:</b>		07/08/14																																																																																																
	<b>Test Engineer:</b>		R. Alegre/Jude S./ Eric B.																																																																																																
	<b>Configuration:</b>		EUT only X position																																																																																																
	<b>Mode:</b>		GPRS 1900MHz																																																																																																
	<b>Test Equipment:</b>		Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T72 Substitution, 4ft SMA Cable Warehouse																																																																																																
			<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9"><b>Low Ch</b></td> </tr> <tr> <td>1850.20</td> <td>8.51</td> <td>V</td> <td>0.85</td> <td>7.9</td> <td>15.56</td> <td>33.0</td> <td>-17.4</td> <td></td> </tr> <tr> <td>1850.20</td> <td>20.91</td> <td>H</td> <td>0.85</td> <td>7.9</td> <td>27.96</td> <td>33.0</td> <td>-5.0</td> <td></td> </tr> <tr> <td colspan="9"><b>Mid Ch</b></td> </tr> <tr> <td>1880.00</td> <td>10.96</td> <td>V</td> <td>0.85</td> <td>7.9</td> <td>18.01</td> <td>33.0</td> <td>-15.0</td> <td></td> </tr> <tr> <td>1880.00</td> <td>20.72</td> <td>H</td> <td>0.85</td> <td>7.9</td> <td>27.77</td> <td>33.0</td> <td>-5.2</td> <td></td> </tr> <tr> <td colspan="9"><b>High Ch</b></td> </tr> <tr> <td>1909.80</td> <td>11.17</td> <td>V</td> <td>0.85</td> <td>7.9</td> <td>18.22</td> <td>33.0</td> <td>-14.8</td> <td></td> </tr> <tr> <td>1909.80</td> <td>21.84</td> <td>H</td> <td>0.85</td> <td>7.9</td> <td>28.89</td> <td>33.0</td> <td>-4.1</td> <td></td> </tr> </tbody> </table>							f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	<b>Low Ch</b>									1850.20	8.51	V	0.85	7.9	15.56	33.0	-17.4		1850.20	20.91	H	0.85	7.9	27.96	33.0	-5.0		<b>Mid Ch</b>									1880.00	10.96	V	0.85	7.9	18.01	33.0	-15.0		1880.00	20.72	H	0.85	7.9	27.77	33.0	-5.2		<b>High Ch</b>									1909.80	11.17	V	0.85	7.9	18.22	33.0	-14.8		1909.80	21.84	H	0.85	7.9	28.89	33.0	-4.1	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
<b>Low Ch</b>																																																																																																			
1850.20	8.51	V	0.85	7.9	15.56	33.0	-17.4																																																																																												
1850.20	20.91	H	0.85	7.9	27.96	33.0	-5.0																																																																																												
<b>Mid Ch</b>																																																																																																			
1880.00	10.96	V	0.85	7.9	18.01	33.0	-15.0																																																																																												
1880.00	20.72	H	0.85	7.9	27.77	33.0	-5.2																																																																																												
<b>High Ch</b>																																																																																																			
1909.80	11.17	V	0.85	7.9	18.22	33.0	-14.8																																																																																												
1909.80	21.84	H	0.85	7.9	28.89	33.0	-4.1																																																																																												
Rev. 3.17.11		Note: For Band 4 EIRP limit is 30dBm																																																																																																	

Band GSM85 0 EGPRS	<b>High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C</b>								
	<b>Company:</b>		Sony						
	<b>Project #:</b>		14U17927						
	<b>Date:</b>		07/09/14						
	<b>Test Engineer:</b>		K. Ros/ R. Yu						
	<b>Configuration:</b>		EUT only Y position						
	<b>Mode:</b>		EGPRS 850MHz						
	<b>Test Equipment:</b>								
	Receiving: Sunol T185, and 3m Chamber N-type Cable (Setup this one for testing EUT)								
	Substitution: Dipole S/N: 00022117, 5ft SMA Cable (SN # 16795) Warehouse.								
	<b>f MHz</b>	<b>SG reading (dBm)</b>	<b>Ant. Pol. (H/V)</b>	<b>Cable Loss (dB)</b>	<b>Antenna Gain (dBd)</b>	<b>ERP (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>	<b>Notes</b>
	<b>Low Ch</b>								
	824.20	16.36	V	0.5	0.0	15.86	38.5	-22.6	
	824.20	28.55	H	0.5	0.0	28.05	38.5	-10.4	
	<b>Mid Ch</b>								
	836.60	19.79	V	0.5	0.0	19.29	38.5	-19.2	
	836.60	28.51	H	0.5	0.0	28.01	38.5	-10.4	
	<b>High Ch</b>								
	848.80	19.21	V	0.5	0.0	18.71	38.5	-19.7	
	848.80	28.98	H	0.5	0.0	28.48	38.5	-10.0	
	Rev. 3.17.11								
	Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								

Band GSM85 0 GPRS	<b>High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C</b>								
	<b>Company:</b>		Sony						
	<b>Project #:</b>		14U17927						
	<b>Date:</b>		07/09/14						
	<b>Test Engineer:</b>		K. Ros/ R. Yu						
	<b>Configuration:</b>		EUT only Y position						
	<b>Mode:</b>		GPRS 850MHz						
	<b>Test Equipment:</b>								
	Receiving: Sunol T185, and 3m Chamber N-type Cable (Setup this one for testing EUT)								
	Substitution: Dipole S/N: 00022117, 5ft SMA Cable (SN # 16795) Warehouse.								
	<b>f MHz</b>	<b>SG reading (dBm)</b>	<b>Ant. Pol. (H/V)</b>	<b>Cable Loss (dB)</b>	<b>Antenna Gain (dBd)</b>	<b>ERP (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>	<b>Notes</b>
	<b>Low Ch</b>								
	824.20	19.92	V	0.5	0.0	19.42	38.5	-19.0	
	824.20	30.32	H	0.5	0.0	29.82	38.5	-8.6	
	<b>Mid Ch</b>								
	836.60	18.57	V	0.5	0.0	18.07	38.5	-20.4	
	836.60	31.02	H	0.5	0.0	30.52	38.5	-7.9	
	<b>High Ch</b>								
	848.80	22.04	V	0.5	0.0	21.54	38.5	-16.9	
	848.80	31.03	H	0.5	0.0	30.53	38.5	-7.9	
	Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								



Band  LTE7  20MHz  QPSK	<b>High Frequency Substitution Measurement</b> <b>UL Verification Services, Inc. Chamber C</b>																																																																																																		
	<b>Company:</b>		Sony																																																																																																
	<b>Project #:</b>		14U17927																																																																																																
	<b>Date:</b>		07/09/14																																																																																																
	<b>Test Engineer:</b>		K. Ros/ R. Yu																																																																																																
	<b>Configuration:</b>		EUT only, Z position																																																																																																
	<b>Mode:</b>		LTE Band 7 QPSK, 20MHz																																																																																																
	<b>Test Equipment:</b>		Receiving: Horn T119, and Chamber C SMA Cables Substitution: T72, 5ft SMA Cable (SN # 16795) Warehouse.																																																																																																
			<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9"><b>Low Ch</b></td> </tr> <tr> <td>2510.00</td> <td>10.76</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>19.36</td> <td>33.0</td> <td>-13.6</td> <td></td> </tr> <tr> <td>2510.00</td> <td>12.59</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>21.19</td> <td>33.0</td> <td>-11.8</td> <td></td> </tr> <tr> <td colspan="9"><b>Mid Ch</b></td> </tr> <tr> <td>2535.00</td> <td>8.62</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>17.22</td> <td>33.0</td> <td>-15.8</td> <td></td> </tr> <tr> <td>2535.00</td> <td>11.56</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>20.16</td> <td>33.0</td> <td>-12.8</td> <td></td> </tr> <tr> <td colspan="9"><b>High Ch</b></td> </tr> <tr> <td>2560.00</td> <td>7.47</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>16.07</td> <td>33.0</td> <td>-16.9</td> <td></td> </tr> <tr> <td>2560.00</td> <td>11.21</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>19.81</td> <td>33.0</td> <td>-13.2</td> <td></td> </tr> </tbody> </table>							f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	<b>Low Ch</b>									2510.00	10.76	V	0.9	9.5	19.36	33.0	-13.6		2510.00	12.59	H	0.9	9.5	21.19	33.0	-11.8		<b>Mid Ch</b>									2535.00	8.62	V	0.9	9.5	17.22	33.0	-15.8		2535.00	11.56	H	0.9	9.5	20.16	33.0	-12.8		<b>High Ch</b>									2560.00	7.47	V	0.9	9.5	16.07	33.0	-16.9		2560.00	11.21	H	0.9	9.5	19.81	33.0	-13.2	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
<b>Low Ch</b>																																																																																																			
2510.00	10.76	V	0.9	9.5	19.36	33.0	-13.6																																																																																												
2510.00	12.59	H	0.9	9.5	21.19	33.0	-11.8																																																																																												
<b>Mid Ch</b>																																																																																																			
2535.00	8.62	V	0.9	9.5	17.22	33.0	-15.8																																																																																												
2535.00	11.56	H	0.9	9.5	20.16	33.0	-12.8																																																																																												
<b>High Ch</b>																																																																																																			
2560.00	7.47	V	0.9	9.5	16.07	33.0	-16.9																																																																																												
2560.00	11.21	H	0.9	9.5	19.81	33.0	-13.2																																																																																												
Rev. 3.17.11		Note: For Band 4 EIRP limit is 30dBm																																																																																																	



Band  LTE7  15MHz  QPSK	<b>High Frequency Substitution Measurement</b> <b>UL Verification Services, Inc. Chamber C</b>																																																																																																		
	<b>Company:</b>		Sony																																																																																																
	<b>Project #:</b>		14U17927																																																																																																
	<b>Date:</b>		07/09/14																																																																																																
	<b>Test Engineer:</b>		K. Ros/ R. Yu																																																																																																
	<b>Configuration:</b>		EUT only, Z position																																																																																																
	<b>Mode:</b>		LTE Band 7 QPSK, 15MHz																																																																																																
	<b>Test Equipment:</b>		Receiving: Horn T119, and Chamber C SMA Cables Substitution: T72, 5ft SMA Cable (SN # 16795) Warehouse.																																																																																																
			<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9"><b>Low Ch</b></td> </tr> <tr> <td>2507.50</td> <td>11.64</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>20.24</td> <td>33.0</td> <td>-12.8</td> <td></td> </tr> <tr> <td>2507.50</td> <td>12.47</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>21.07</td> <td>33.0</td> <td>-11.9</td> <td></td> </tr> <tr> <td colspan="9"><b>Mid Ch</b></td> </tr> <tr> <td>2535.00</td> <td>8.65</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>17.25</td> <td>33.0</td> <td>-15.8</td> <td></td> </tr> <tr> <td>2535.00</td> <td>11.67</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>20.27</td> <td>33.0</td> <td>-12.7</td> <td></td> </tr> <tr> <td colspan="9"><b>High Ch</b></td> </tr> <tr> <td>2562.50</td> <td>8.72</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>17.32</td> <td>33.0</td> <td>-15.7</td> <td></td> </tr> <tr> <td>2562.50</td> <td>10.40</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>19.00</td> <td>33.0</td> <td>-14.0</td> <td></td> </tr> </tbody> </table>							f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	<b>Low Ch</b>									2507.50	11.64	V	0.9	9.5	20.24	33.0	-12.8		2507.50	12.47	H	0.9	9.5	21.07	33.0	-11.9		<b>Mid Ch</b>									2535.00	8.65	V	0.9	9.5	17.25	33.0	-15.8		2535.00	11.67	H	0.9	9.5	20.27	33.0	-12.7		<b>High Ch</b>									2562.50	8.72	V	0.9	9.5	17.32	33.0	-15.7		2562.50	10.40	H	0.9	9.5	19.00	33.0	-14.0	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
<b>Low Ch</b>																																																																																																			
2507.50	11.64	V	0.9	9.5	20.24	33.0	-12.8																																																																																												
2507.50	12.47	H	0.9	9.5	21.07	33.0	-11.9																																																																																												
<b>Mid Ch</b>																																																																																																			
2535.00	8.65	V	0.9	9.5	17.25	33.0	-15.8																																																																																												
2535.00	11.67	H	0.9	9.5	20.27	33.0	-12.7																																																																																												
<b>High Ch</b>																																																																																																			
2562.50	8.72	V	0.9	9.5	17.32	33.0	-15.7																																																																																												
2562.50	10.40	H	0.9	9.5	19.00	33.0	-14.0																																																																																												
Rev. 3.17.11		Note: For Band 4 EIRP limit is 30dBm																																																																																																	



Band  LTE7  10MHz  QPSK	<b>High Frequency Substitution Measurement</b> <b>UL Verification Services, Inc. Chamber C</b>																																																																																																		
	<b>Company:</b>		Sony																																																																																																
	<b>Project #:</b>		14U17927																																																																																																
	<b>Date:</b>		07/09/14																																																																																																
	<b>Test Engineer:</b>		K. Ros/ R. Yu																																																																																																
	<b>Configuration:</b>		EUT only, Z position																																																																																																
	<b>Mode:</b>		LTE Band 7 QPSK, 10MHz																																																																																																
	<b>Test Equipment:</b>		Receiving: Horn T119, and Chamber C SMA Cables Substitution: T72, 5ft SMA Cable (SN # 16795) Warehouse.																																																																																																
			<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9"><b>Low Ch</b></td> </tr> <tr> <td>2505.00</td> <td>10.69</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>19.29</td> <td>33.0</td> <td>-13.7</td> <td></td> </tr> <tr> <td>2505.00</td> <td>12.49</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>21.09</td> <td>33.0</td> <td>-11.9</td> <td></td> </tr> <tr> <td colspan="9"><b>Mid Ch</b></td> </tr> <tr> <td>2535.00</td> <td>10.16</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>18.76</td> <td>33.0</td> <td>-14.2</td> <td></td> </tr> <tr> <td>2535.00</td> <td>11.37</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>19.97</td> <td>33.0</td> <td>-13.0</td> <td></td> </tr> <tr> <td colspan="9"><b>High Ch</b></td> </tr> <tr> <td>2565.00</td> <td>10.06</td> <td>V</td> <td>0.9</td> <td>9.5</td> <td>18.66</td> <td>33.0</td> <td>-14.3</td> <td></td> </tr> <tr> <td>2565.00</td> <td>10.90</td> <td>H</td> <td>0.9</td> <td>9.5</td> <td>19.50</td> <td>33.0</td> <td>-13.5</td> <td></td> </tr> </tbody> </table>							f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	<b>Low Ch</b>									2505.00	10.69	V	0.9	9.5	19.29	33.0	-13.7		2505.00	12.49	H	0.9	9.5	21.09	33.0	-11.9		<b>Mid Ch</b>									2535.00	10.16	V	0.9	9.5	18.76	33.0	-14.2		2535.00	11.37	H	0.9	9.5	19.97	33.0	-13.0		<b>High Ch</b>									2565.00	10.06	V	0.9	9.5	18.66	33.0	-14.3		2565.00	10.90	H	0.9	9.5	19.50	33.0	-13.5	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
<b>Low Ch</b>																																																																																																			
2505.00	10.69	V	0.9	9.5	19.29	33.0	-13.7																																																																																												
2505.00	12.49	H	0.9	9.5	21.09	33.0	-11.9																																																																																												
<b>Mid Ch</b>																																																																																																			
2535.00	10.16	V	0.9	9.5	18.76	33.0	-14.2																																																																																												
2535.00	11.37	H	0.9	9.5	19.97	33.0	-13.0																																																																																												
<b>High Ch</b>																																																																																																			
2565.00	10.06	V	0.9	9.5	18.66	33.0	-14.3																																																																																												
2565.00	10.90	H	0.9	9.5	19.50	33.0	-13.5																																																																																												
Rev. 3.17.11		Note: For Band 4 EIRP limit is 30dBm																																																																																																	





Band  LTE5  10MHz  16QAM	<b>High Frequency Substitution Measurement UL Verification Services, Inc. Chamber A</b>																																																																																																
	<b>Company:</b>		Sony																																																																																														
	<b>Project #:</b>		14U17927																																																																																														
	<b>Date:</b>		07/08/14																																																																																														
	<b>Test Engineer:</b>		O. Stoelting																																																																																														
	<b>Configuration:</b>		Y-Pos EUT Only																																																																																														
	<b>Mode:</b>		LTE5 10MHz FUND 16QAM																																																																																														
	<b>Test Equipment:</b>																																																																																																
	Receiving: Sunol T130, and 5m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole T416, 4ft SMA Cable Warehouse.																																																																																																
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9"><b>Low Ch</b></td> </tr> <tr> <td>826.50</td> <td>9.33</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>8.44</td> <td>38.5</td> <td>-30.0</td> <td></td> </tr> <tr> <td>826.50</td> <td>17.95</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>17.05</td> <td>38.5</td> <td>-21.4</td> <td></td> </tr> <tr> <td colspan="9"><b>Mid Ch</b></td> </tr> <tr> <td>836.50</td> <td>11.41</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>10.51</td> <td>38.5</td> <td>-27.9</td> <td></td> </tr> <tr> <td>836.50</td> <td>17.60</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>16.70</td> <td>38.5</td> <td>-21.8</td> <td></td> </tr> <tr> <td colspan="9"><b>High Ch</b></td> </tr> <tr> <td>846.50</td> <td>12.98</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>12.08</td> <td>38.5</td> <td>-26.4</td> <td></td> </tr> <tr> <td>846.50</td> <td>18.73</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>17.83</td> <td>38.5</td> <td>-20.6</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	<b>Low Ch</b>									826.50	9.33	V	0.9	0.0	8.44	38.5	-30.0		826.50	17.95	H	0.9	0.0	17.05	38.5	-21.4		<b>Mid Ch</b>									836.50	11.41	V	0.9	0.0	10.51	38.5	-27.9		836.50	17.60	H	0.9	0.0	16.70	38.5	-21.8		<b>High Ch</b>									846.50	12.98	V	0.9	0.0	12.08	38.5	-26.4		846.50	18.73	H	0.9	0.0	17.83	38.5	-20.6
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																									
<b>Low Ch</b>																																																																																																	
826.50	9.33	V	0.9	0.0	8.44	38.5	-30.0																																																																																										
826.50	17.95	H	0.9	0.0	17.05	38.5	-21.4																																																																																										
<b>Mid Ch</b>																																																																																																	
836.50	11.41	V	0.9	0.0	10.51	38.5	-27.9																																																																																										
836.50	17.60	H	0.9	0.0	16.70	38.5	-21.8																																																																																										
<b>High Ch</b>																																																																																																	
846.50	12.98	V	0.9	0.0	12.08	38.5	-26.4																																																																																										
846.50	18.73	H	0.9	0.0	17.83	38.5	-20.6																																																																																										
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																	



Band LTE5 5MHz 16QAM	<b>High Frequency Substitution Measurement UL Verification Services, Inc. Chamber A</b>																																																																																																
	<b>Company:</b>		Sony																																																																																														
	<b>Project #:</b>		14U17927																																																																																														
	<b>Date:</b>		07/08/14																																																																																														
	<b>Test Engineer:</b>		O. Stoelting																																																																																														
	<b>Configuration:</b>		Y-Pos EUT Only																																																																																														
	<b>Mode:</b>		LTE5 5MHz FUND 16QAM																																																																																														
	<b>Test Equipment:</b>																																																																																																
	Receiving: Sunol T130, and 5m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole T416, 4ft SMA Cable Warehouse.																																																																																																
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9"><b>Low Ch</b></td> </tr> <tr> <td>826.50</td> <td>9.00</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>8.11</td> <td>38.5</td> <td>-30.3</td> <td></td> </tr> <tr> <td>826.50</td> <td>17.43</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>16.53</td> <td>38.5</td> <td>-21.9</td> <td></td> </tr> <tr> <td colspan="9"><b>Mid Ch</b></td> </tr> <tr> <td>836.50</td> <td>11.32</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>10.42</td> <td>38.5</td> <td>-28.0</td> <td></td> </tr> <tr> <td>836.50</td> <td>17.61</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>16.71</td> <td>38.5</td> <td>-21.7</td> <td></td> </tr> <tr> <td colspan="9"><b>High Ch</b></td> </tr> <tr> <td>846.50</td> <td>11.88</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>10.98</td> <td>38.5</td> <td>-27.5</td> <td></td> </tr> <tr> <td>846.50</td> <td>18.25</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>17.35</td> <td>38.5</td> <td>-21.1</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	<b>Low Ch</b>									826.50	9.00	V	0.9	0.0	8.11	38.5	-30.3		826.50	17.43	H	0.9	0.0	16.53	38.5	-21.9		<b>Mid Ch</b>									836.50	11.32	V	0.9	0.0	10.42	38.5	-28.0		836.50	17.61	H	0.9	0.0	16.71	38.5	-21.7		<b>High Ch</b>									846.50	11.88	V	0.9	0.0	10.98	38.5	-27.5		846.50	18.25	H	0.9	0.0	17.35	38.5	-21.1
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																									
<b>Low Ch</b>																																																																																																	
826.50	9.00	V	0.9	0.0	8.11	38.5	-30.3																																																																																										
826.50	17.43	H	0.9	0.0	16.53	38.5	-21.9																																																																																										
<b>Mid Ch</b>																																																																																																	
836.50	11.32	V	0.9	0.0	10.42	38.5	-28.0																																																																																										
836.50	17.61	H	0.9	0.0	16.71	38.5	-21.7																																																																																										
<b>High Ch</b>																																																																																																	
846.50	11.88	V	0.9	0.0	10.98	38.5	-27.5																																																																																										
846.50	18.25	H	0.9	0.0	17.35	38.5	-21.1																																																																																										
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																	

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber A										
Band  LTE5  5MHz  QPSK	<b>Company:</b>		Sony							
	<b>Project #:</b>		14U17927							
	<b>Date:</b>		07/08/14							
	<b>Test Engineer:</b>		O. Stoelting							
	<b>Configuration:</b>		Y-Pos EUT Only							
	<b>Mode:</b>		LTE5 5MHz FUND QPSK							
	<b>Test Equipment:</b>									
	Receiving: Sunol T130, and 5m Chamber N-type Cable (Setup this one for testing EUT)									
	Substitution: Dipole T416, 4ft SMA Cable Warehouse.									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	
<b>Low Ch</b>										
826.50	10.06	V	0.9	0.0	9.17	38.5	-29.3			
826.50	18.47	H	0.9	0.0	17.57	38.5	-20.9			
<b>Mid Ch</b>										
836.50	12.29	V	0.9	0.0	11.39	38.5	-27.1			
836.50	18.68	H	0.9	0.0	17.78	38.5	-20.7			
<b>High Ch</b>										
846.50	13.15	V	0.9	0.0	12.25	38.5	-26.2			
846.50	19.48	H	0.9	0.0	18.58	38.5	-19.9			
Rev. 3.17.11										
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm										

Band  LTE5  3MHz  16QAM	<b>High Frequency Substitution Measurement UL Verification Services, Inc. Chamber A</b>																																																																																																	
	<b>Company:</b>		Sony																																																																																															
	<b>Project #:</b>		14U17927																																																																																															
	<b>Date:</b>		07/08/14																																																																																															
	<b>Test Engineer:</b>		K. Ros																																																																																															
	<b>Configuration:</b>		Y-pos EUT Only																																																																																															
	<b>Mode:</b>		LTE5 3MHz FUND 16QAM																																																																																															
	<b>Test Equipment:</b>																																																																																																	
	Receiving: Sunol T130, and 5m Chamber N-type Cable (Setup this one for testing EUT)																																																																																																	
	Substitution: Dipole T416, 4ft SMA Cable Warehouse.																																																																																																	
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9"><b>Low Ch</b></td> </tr> <tr> <td>825.50</td> <td>6.77</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>5.88</td> <td>38.5</td> <td>-32.6</td> <td></td> </tr> <tr> <td>825.50</td> <td>15.37</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>14.47</td> <td>38.5</td> <td>-24.0</td> <td></td> </tr> <tr> <td colspan="9"><b>Mid Ch</b></td> </tr> <tr> <td>836.50</td> <td>10.22</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.32</td> <td>38.5</td> <td>-29.1</td> <td></td> </tr> <tr> <td>836.50</td> <td>16.47</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>15.57</td> <td>38.5</td> <td>-22.9</td> <td></td> </tr> <tr> <td colspan="9"><b>High Ch</b></td> </tr> <tr> <td>847.50</td> <td>10.62</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.72</td> <td>38.5</td> <td>-28.7</td> <td></td> </tr> <tr> <td>847.50</td> <td>17.08</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>16.18</td> <td>38.5</td> <td>-22.3</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	<b>Low Ch</b>									825.50	6.77	V	0.9	0.0	5.88	38.5	-32.6		825.50	15.37	H	0.9	0.0	14.47	38.5	-24.0		<b>Mid Ch</b>									836.50	10.22	V	0.9	0.0	9.32	38.5	-29.1		836.50	16.47	H	0.9	0.0	15.57	38.5	-22.9		<b>High Ch</b>									847.50	10.62	V	0.9	0.0	9.72	38.5	-28.7		847.50	17.08	H	0.9	0.0	16.18	38.5	-22.3	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
<b>Low Ch</b>																																																																																																		
825.50	6.77	V	0.9	0.0	5.88	38.5	-32.6																																																																																											
825.50	15.37	H	0.9	0.0	14.47	38.5	-24.0																																																																																											
<b>Mid Ch</b>																																																																																																		
836.50	10.22	V	0.9	0.0	9.32	38.5	-29.1																																																																																											
836.50	16.47	H	0.9	0.0	15.57	38.5	-22.9																																																																																											
<b>High Ch</b>																																																																																																		
847.50	10.62	V	0.9	0.0	9.72	38.5	-28.7																																																																																											
847.50	17.08	H	0.9	0.0	16.18	38.5	-22.3																																																																																											
Rev. 3.17.11																																																																																																		
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																		

Band  LTE5  3MHz  QPSK	<b>High Frequency Substitution Measurement UL Verification Services, Inc. Chamber A</b>																																																																																																		
	<b>Company:</b>		Sony																																																																																																
	<b>Project #:</b>		14U17927																																																																																																
	<b>Date:</b>		07/08/14																																																																																																
	<b>Test Engineer:</b>		O. Stoelting																																																																																																
	<b>Configuration:</b>		Y-Pos EUT Only																																																																																																
	<b>Mode:</b>		LTE5 3MHz FUND QPSK																																																																																																
	<b>Test Equipment:</b>		Receiving: Sunol T130, and 5m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole T416, 4ft SMA Cable Warehouse.																																																																																																
			<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9"><b>Low Ch</b></td> </tr> <tr> <td>825.50</td> <td>10.37</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.47</td> <td>38.5</td> <td>-29.0</td> <td></td> </tr> <tr> <td>825.50</td> <td>18.54</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>17.64</td> <td>38.5</td> <td>-20.8</td> <td></td> </tr> <tr> <td colspan="9"><b>Mid Ch</b></td> </tr> <tr> <td>836.50</td> <td>12.59</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>11.69</td> <td>38.5</td> <td>-26.8</td> <td></td> </tr> <tr> <td>836.50</td> <td>18.99</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>18.09</td> <td>38.5</td> <td>-20.4</td> <td></td> </tr> <tr> <td colspan="9"><b>High Ch</b></td> </tr> <tr> <td>847.50</td> <td>13.10</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>12.20</td> <td>38.5</td> <td>-26.2</td> <td></td> </tr> <tr> <td>847.50</td> <td>19.50</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>18.60</td> <td>38.5</td> <td>-19.8</td> <td></td> </tr> </tbody> </table>							f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	<b>Low Ch</b>									825.50	10.37	V	0.9	0.0	9.47	38.5	-29.0		825.50	18.54	H	0.9	0.0	17.64	38.5	-20.8		<b>Mid Ch</b>									836.50	12.59	V	0.9	0.0	11.69	38.5	-26.8		836.50	18.99	H	0.9	0.0	18.09	38.5	-20.4		<b>High Ch</b>									847.50	13.10	V	0.9	0.0	12.20	38.5	-26.2		847.50	19.50	H	0.9	0.0	18.60	38.5	-19.8	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
<b>Low Ch</b>																																																																																																			
825.50	10.37	V	0.9	0.0	9.47	38.5	-29.0																																																																																												
825.50	18.54	H	0.9	0.0	17.64	38.5	-20.8																																																																																												
<b>Mid Ch</b>																																																																																																			
836.50	12.59	V	0.9	0.0	11.69	38.5	-26.8																																																																																												
836.50	18.99	H	0.9	0.0	18.09	38.5	-20.4																																																																																												
<b>High Ch</b>																																																																																																			
847.50	13.10	V	0.9	0.0	12.20	38.5	-26.2																																																																																												
847.50	19.50	H	0.9	0.0	18.60	38.5	-19.8																																																																																												
Rev. 3.17.11		Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																	

Band  LTE5  1.4MHz  16QAM	<b>High Frequency Substitution Measurement UL Verification Services, Inc. Chamber A</b>																																																																																																
	<b>Company:</b> Sony																																																																																																
	<b>Project #:</b> 14U17927																																																																																																
	<b>Date:</b> 07/08/14																																																																																																
	<b>Test Engineer:</b> O. Stoelting																																																																																																
	<b>Configuration:</b> Y-pos EUT Only																																																																																																
	<b>Mode:</b> LTE5 1.4MHz FUND 16QAM																																																																																																
	<b>Test Equipment:</b>																																																																																																
	Receiving: Sunol T130, and 5m Chamber N-type Cable (Setup this one for testing EUT)																																																																																																
	Substitution: Dipole T416, 4ft SMA Cable Warehouse.																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9"><b>Low Ch</b></td> </tr> <tr> <td>824.70</td> <td>9.10</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>8.20</td> <td>38.5</td> <td>-30.2</td> <td></td> </tr> <tr> <td>824.70</td> <td>16.75</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>15.85</td> <td>38.5</td> <td>-22.6</td> <td></td> </tr> <tr> <td colspan="9"><b>Mid Ch</b></td> </tr> <tr> <td>836.50</td> <td>11.70</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>10.80</td> <td>38.5</td> <td>-27.7</td> <td></td> </tr> <tr> <td>836.50</td> <td>17.62</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>16.72</td> <td>38.5</td> <td>-21.7</td> <td></td> </tr> <tr> <td colspan="9"><b>High Ch</b></td> </tr> <tr> <td>848.30</td> <td>11.93</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>11.03</td> <td>38.5</td> <td>-27.4</td> <td></td> </tr> <tr> <td>848.30</td> <td>18.64</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>17.74</td> <td>38.5</td> <td>-20.7</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	<b>Low Ch</b>									824.70	9.10	V	0.9	0.0	8.20	38.5	-30.2		824.70	16.75	H	0.9	0.0	15.85	38.5	-22.6		<b>Mid Ch</b>									836.50	11.70	V	0.9	0.0	10.80	38.5	-27.7		836.50	17.62	H	0.9	0.0	16.72	38.5	-21.7		<b>High Ch</b>									848.30	11.93	V	0.9	0.0	11.03	38.5	-27.4		848.30	18.64	H	0.9	0.0	17.74	38.5	-20.7	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																									
<b>Low Ch</b>																																																																																																	
824.70	9.10	V	0.9	0.0	8.20	38.5	-30.2																																																																																										
824.70	16.75	H	0.9	0.0	15.85	38.5	-22.6																																																																																										
<b>Mid Ch</b>																																																																																																	
836.50	11.70	V	0.9	0.0	10.80	38.5	-27.7																																																																																										
836.50	17.62	H	0.9	0.0	16.72	38.5	-21.7																																																																																										
<b>High Ch</b>																																																																																																	
848.30	11.93	V	0.9	0.0	11.03	38.5	-27.4																																																																																										
848.30	18.64	H	0.9	0.0	17.74	38.5	-20.7																																																																																										
Rev. 3.17.11																																																																																																	
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																	

Band  LTE5  1.4MHz  QPSK	<b>High Frequency Substitution Measurement</b> <b>UL Verification Services, Inc. Chamber A</b>																																																																																																		
	<b>Company:</b>		Sony																																																																																																
	<b>Project #:</b>		14U17927																																																																																																
	<b>Date:</b>		07/08/14																																																																																																
	<b>Test Engineer:</b>		O. Stoelting																																																																																																
	<b>Configuration:</b>		Y-pos EUT Only																																																																																																
	<b>Mode:</b>		LTE5 1.4MHz FUND QPSK																																																																																																
	<b>Test Equipment:</b>		Receiving: Sunol T130, and 5m Chamber N-type Cable (Setup this one for testing EUT) Substitution: Dipole T416, 4ft SMA Cable Warehouse.																																																																																																
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9"><b>Low Ch</b></td> </tr> <tr> <td>824.70</td> <td>10.05</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>9.15</td> <td>38.5</td> <td>-29.3</td> <td></td> </tr> <tr> <td>824.70</td> <td>17.57</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>16.67</td> <td>38.5</td> <td>-21.8</td> <td></td> </tr> <tr> <td colspan="9"><b>Mid Ch</b></td> </tr> <tr> <td>836.50</td> <td>12.74</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>11.84</td> <td>38.5</td> <td>-26.6</td> <td></td> </tr> <tr> <td>836.50</td> <td>18.67</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>17.77</td> <td>38.5</td> <td>-20.7</td> <td></td> </tr> <tr> <td colspan="9"><b>High Ch</b></td> </tr> <tr> <td>848.30</td> <td>12.92</td> <td>V</td> <td>0.9</td> <td>0.0</td> <td>12.02</td> <td>38.5</td> <td>-26.4</td> <td></td> </tr> <tr> <td>848.30</td> <td>19.54</td> <td>H</td> <td>0.9</td> <td>0.0</td> <td>18.64</td> <td>38.5</td> <td>-19.8</td> <td></td> </tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	<b>Low Ch</b>									824.70	10.05	V	0.9	0.0	9.15	38.5	-29.3		824.70	17.57	H	0.9	0.0	16.67	38.5	-21.8		<b>Mid Ch</b>									836.50	12.74	V	0.9	0.0	11.84	38.5	-26.6		836.50	18.67	H	0.9	0.0	17.77	38.5	-20.7		<b>High Ch</b>									848.30	12.92	V	0.9	0.0	12.02	38.5	-26.4		848.30	19.54	H	0.9	0.0	18.64	38.5	-19.8	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																										
<b>Low Ch</b>																																																																																																			
824.70	10.05	V	0.9	0.0	9.15	38.5	-29.3																																																																																												
824.70	17.57	H	0.9	0.0	16.67	38.5	-21.8																																																																																												
<b>Mid Ch</b>																																																																																																			
836.50	12.74	V	0.9	0.0	11.84	38.5	-26.6																																																																																												
836.50	18.67	H	0.9	0.0	17.77	38.5	-20.7																																																																																												
<b>High Ch</b>																																																																																																			
848.30	12.92	V	0.9	0.0	12.02	38.5	-26.4																																																																																												
848.30	19.54	H	0.9	0.0	18.64	38.5	-19.8																																																																																												
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																			

## 11.2. FIELD STRENGTH OF SPURIOUS RADIATION

### **RULE PART(S)**

FCC: §2.1053, §22.917, §24.238, and §27

### **LIMIT**

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB

### **TEST PROCEDURE**

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### **RESULTS**

### 11.2.1. SPURIOUS RADIATION DATA

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		Sony								
Project #:		14U17927								
Date:		07/09/14								
Test Engineer:		B. Liu / Steven Her								
Configuration:		EUT w/ AC adaptor and HS								
Mode:		HSDPA B2 HARM								
Chamber		Pre-amplifier		Filter		Limit				
5m Chamber F		T34 8449B		Filter 1						
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1852.4MHz										
Band 2	3.704	-9.0	V	3.0	35.4	1.0	-43.4	-13.0	-30.4	
	5.557	-4.0	V	3.0	34.7	1.0	-37.7	-13.0	-24.7	
	7.410	-5.8	V	3.0	34.9	1.0	-39.7	-13.0	-26.7	
HSDPA	3.704	-7.5	H	3.0	35.4	1.0	-41.9	-13.0	-28.9	
	5.557	-3.8	H	3.0	34.7	1.0	-37.5	-13.0	-24.5	
	7.410	-4.1	H	3.0	34.9	1.0	-38.0	-13.0	-25.0	
Mid Ch, 1880MHz										
	3.760	-7.8	V	3.0	35.3	1.0	-42.2	-13.0	-29.2	
	5.640	-6.3	V	3.0	34.7	1.0	-40.0	-13.0	-27.0	
	7.520	-5.4	V	3.0	34.9	1.0	-39.3	-13.0	-26.3	
	3.760	-8.6	H	3.0	35.3	1.0	-42.9	-13.0	-29.9	
	5.640	-5.5	H	3.0	34.7	1.0	-39.2	-13.0	-26.2	
	7.520	-3.1	H	3.0	34.9	1.0	-37.0	-13.0	-24.0	
High Ch, 1907.6MHz										
	3.815	-7.1	V	3.0	35.3	1.0	-41.4	-13.0	-28.4	
	5.722	-6.9	V	3.0	34.7	1.0	-40.7	-13.0	-27.7	
	7.640	-1.8	V	3.0	35.0	1.0	-35.8	-13.0	-22.8	
	3.815	-7.6	H	3.0	35.3	1.0	-41.9	-13.0	-28.9	
	5.722	-4.9	H	3.0	34.7	1.0	-38.6	-13.0	-25.6	
	7.640	-2.8	H	3.0	35.0	1.0	-36.8	-13.0	-23.8	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17927								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu / Steven Her								
<b>Configuration:</b>		EUT w/ AC adaptor and HS								
<b>Mode:</b>		REL99 B2 HARM								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber F		T34 8449B			Filter 1					
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	<b>Low Ch, 1852.4MHz</b>									
	3.704	-8.3	V	3.0	35.4	1.0	-42.7	-13.0	-29.7	
Band 2	5.557	-5.8	V	3.0	34.7	1.0	-39.5	-13.0	-26.5	
	7.410	-5.4	V	3.0	34.9	1.0	-39.3	-13.0	-26.3	
REL99	3.704	-7.7	H	3.0	35.4	1.0	-42.1	-13.0	-29.1	
	5.557	-4.9	H	3.0	34.7	1.0	-38.6	-13.0	-25.6	
	7.410	-3.4	H	3.0	34.9	1.0	-37.3	-13.0	-24.3	
	<b>Mid Ch, 1880MHz</b>									
	3.760	-6.9	V	3.0	35.3	1.0	-41.2	-13.0	-28.2	
	5.640	-5.3	V	3.0	34.7	1.0	-39.0	-13.0	-26.0	
	7.520	-4.2	V	3.0	34.9	1.0	-38.1	-13.0	-25.1	
	3.760	-8.7	H	3.0	35.3	1.0	-43.0	-13.0	-30.0	
	5.640	-4.1	H	3.0	34.7	1.0	-37.8	-13.0	-24.8	
	7.520	-3.0	H	3.0	34.9	1.0	-37.0	-13.0	-24.0	
	<b>High Ch, 1907.6MHz</b>									
	3.815	-7.7	V	3.0	35.3	1.0	-42.0	-13.0	-29.0	
	5.722	-6.1	V	3.0	34.7	1.0	-39.9	-13.0	-26.9	
	7.640	-4.0	V	3.0	35.0	1.0	-37.9	-13.0	-24.9	
	3.815	-5.9	H	3.0	35.3	1.0	-40.2	-13.0	-27.2	
	5.722	-5.7	H	3.0	34.7	1.0	-39.4	-13.0	-26.4	
	7.640	-1.5	H	3.0	35.0	1.0	-35.5	-13.0	-22.5	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U7929								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu / Steven Her								
<b>Configuration:</b>		EUT w/ AC Adaptor and HS								
<b>Mode:</b>		HSDPA B5 HARM								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber B		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	<b>Low Ch, 826.4MHz</b>									
	1.652	-19.0	V	3.0	37.4	1.0	-55.4	-13.0	-42.4	
Band 5	2.479	-12.0	V	3.0	36.4	1.0	-47.4	-13.0	-34.4	
	3.305	-10.4	V	3.0	35.8	1.0	-45.2	-13.0	-32.2	
HSDPA	1.652	-18.2	H	3.0	37.4	1.0	-54.6	-13.0	-41.6	
	2.479	-14.6	H	3.0	36.4	1.0	-50.0	-13.0	-37.0	
	3.305	-10.1	H	3.0	35.8	1.0	-44.9	-13.0	-31.9	
	<b>Mid Ch, 836.6MHz</b>									
	1.673	-18.5	V	3.0	37.3	1.0	-54.8	-13.0	-41.8	
	2.510	-11.0	V	3.0	36.4	1.0	-46.4	-13.0	-33.4	
	3.346	-11.7	V	3.0	35.8	1.0	-46.4	-13.0	-33.4	
	1.673	-18.4	H	3.0	37.3	1.0	-54.7	-13.0	-41.7	
	2.510	-14.2	H	3.0	36.4	1.0	-49.6	-13.0	-36.6	
	3.346	-10.8	H	3.0	35.8	1.0	-45.5	-13.0	-32.5	
	<b>High Ch, 846.6MHz</b>									
	1.693	-18.1	V	3.0	37.3	1.0	-54.4	-13.0	-41.4	
	2.540	-12.3	V	3.0	36.3	1.0	-47.6	-13.0	-34.6	
	3.386	-10.2	V	3.0	35.7	1.0	-44.9	-13.0	-31.9	
	1.693	-15.8	H	3.0	37.3	1.0	-52.1	-13.0	-39.1	
	2.540	-14.4	H	3.0	36.3	1.0	-49.8	-13.0	-36.8	
	3.386	-11.7	H	3.0	35.7	1.0	-46.4	-13.0	-33.4	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U7929								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu / Steven Her								
<b>Configuration:</b>		EUT w/ AC Adaptor and HS								
<b>Mode:</b>		REL99 B5 HARM								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber B		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	<b>Low Ch, 826.4MHz</b>									
	1.652	-18.6	V	3.0	37.4	1.0	-54.9	-13.0	-41.9	
Band 5	2.479	-12.9	V	3.0	36.4	1.0	-48.3	-13.0	-35.3	
	3.305	-11.4	V	3.0	35.8	1.0	-46.2	-13.0	-33.2	
REL99	1.652	-18.5	H	3.0	37.4	1.0	-54.9	-13.0	-41.9	
	2.479	-14.8	H	3.0	36.4	1.0	-50.2	-13.0	-37.2	
	3.305	-11.5	H	3.0	35.8	1.0	-46.3	-13.0	-33.3	
	<b>Mid Ch, 836.6MHz</b>									
	1.673	-17.2	V	3.0	37.3	1.0	-53.5	-13.0	-40.5	
	2.510	-11.2	V	3.0	36.4	1.0	-46.6	-13.0	-33.6	
	3.346	-10.7	V	3.0	35.8	1.0	-45.4	-13.0	-32.4	
	1.673	-17.7	H	3.0	37.3	1.0	-54.1	-13.0	-41.1	
	2.510	-14.5	H	3.0	36.4	1.0	-49.8	-13.0	-36.8	
	3.346	-12.1	H	3.0	35.8	1.0	-46.8	-13.0	-33.8	
	<b>High Ch, 846.6MHz</b>									
	1.693	-18.0	V	3.0	37.3	1.0	-54.3	-13.0	-41.3	
	2.540	-12.3	V	3.0	36.3	1.0	-47.7	-13.0	-34.7	
	3.386	-9.6	V	3.0	35.7	1.0	-44.3	-13.0	-31.3	
	1.693	-16.6	H	3.0	37.3	1.0	-52.9	-13.0	-39.9	
	2.540	-13.2	H	3.0	36.3	1.0	-48.5	-13.0	-35.5	
	3.386	-10.9	H	3.0	35.7	1.0	-45.6	-13.0	-32.6	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17927								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu / Steven Her								
<b>Configuration:</b>		EUT w/ AC adaptor and HS								
<b>Mode:</b>		EGPRS 1900 HARM								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber F		T34 8449B			Filter 1					
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	<b>Low Ch, 1850.2MHz</b>									
GSM1900	3.704	-8.4	V	3.0	35.4	1.0	-42.8	-13.0	-29.8	
	5.550	-4.5	V	3.0	34.7	1.0	-38.3	-13.0	-25.3	
	7.401	-6.0	V	3.0	34.9	1.0	-40.0	-13.0	-27.0	
EGPRS	3.704	-8.3	H	3.0	35.4	1.0	-42.7	-13.0	-29.7	
	5.550	-4.9	H	3.0	34.7	1.0	-38.6	-13.0	-25.6	
	7.401	-4.0	H	3.0	34.9	1.0	-37.9	-13.0	-24.9	
	<b>Mid Ch, 1880MHz</b>									
	3.760	-7.1	V	3.0	35.3	1.0	-41.5	-13.0	-28.5	
	5.640	-6.2	V	3.0	34.7	1.0	-39.9	-13.0	-26.9	
	7.520	-4.9	V	3.0	34.9	1.0	-38.8	-13.0	-25.8	
	3.760	-7.5	H	3.0	35.3	1.0	-41.8	-13.0	-28.8	
	5.640	-3.7	H	3.0	34.7	1.0	-37.4	-13.0	-24.4	
	7.520	-3.4	H	3.0	34.9	1.0	-37.3	-13.0	-24.3	
	<b>High Ch, 1909.8MHz</b>									
	3.382	-8.0	V	3.0	35.7	1.0	-42.7	-13.0	-29.7	
	5.725	-4.8	V	3.0	34.7	1.0	-38.6	-13.0	-25.6	
	7.640	-3.8	V	3.0	35.0	1.0	-37.8	-13.0	-24.8	
	3.382	-10.4	H	3.0	35.7	1.0	-45.1	-13.0	-32.1	
	5.725	-5.3	H	3.0	34.7	1.0	-39.0	-13.0	-26.0	
	7.640	-2.6	H	3.0	35.0	1.0	-36.5	-13.0	-23.5	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17927								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu / Steven Her								
<b>Configuration:</b>		EUT w/ AC adaptor and HS								
<b>Mode:</b>		GPRS 1900 HARM								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber F		T34 8449B			Filter 1					
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	<b>Low Ch, 1850.2MHz</b>									
GSM1900	3.704	-8.0	V	3.0	35.4	1.0	-42.4	-13.0	-29.4	
	5.550	-4.9	V	3.0	34.7	1.0	-38.6	-13.0	-25.6	
GPRS	7.401	-5.7	V	3.0	34.9	1.0	-39.6	-13.0	-26.6	
	3.704	-11.5	H	3.0	35.4	1.0	-45.9	-13.0	-32.9	
	5.550	-3.2	H	3.0	34.7	1.0	-36.9	-13.0	-23.9	
	7.401	-3.2	H	3.0	34.9	1.0	-37.1	-13.0	-24.1	
	<b>Mid Ch, 1880MHz</b>									
	3.760	-7.5	V	3.0	35.3	1.0	-41.9	-13.0	-28.9	
	5.640	-6.2	V	3.0	34.7	1.0	-39.9	-13.0	-26.9	
	7.520	-4.1	V	3.0	34.9	1.0	-38.1	-13.0	-25.1	
	3.760	-8.3	H	3.0	35.3	1.0	-42.7	-13.0	-29.7	
	5.640	-4.1	H	3.0	34.7	1.0	-37.8	-13.0	-24.8	
	7.520	-1.9	H	3.0	34.9	1.0	-35.8	-13.0	-22.8	
	<b>High Ch, 1909.8MHz</b>									
	3.382	-8.8	V	3.0	35.7	1.0	-43.5	-13.0	-30.5	
	5.725	-6.0	V	3.0	34.7	1.0	-39.7	-13.0	-26.7	
	7.640	-4.0	V	3.0	35.0	1.0	-38.0	-13.0	-25.0	
	3.382	-8.8	H	3.0	35.7	1.0	-43.5	-13.0	-30.5	
	5.725	-3.8	H	3.0	34.7	1.0	-37.5	-13.0	-24.5	
	7.640	-2.0	H	3.0	35.0	1.0	-36.0	-13.0	-23.0	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17929								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu / Steven Her								
<b>Configuration:</b>		EUT w/ AC adaptor and HS								
<b>Mode:</b>		EGPRS 850 HARM								
<div style="border: 1px solid black; padding: 2px; text-align: center;">Chamber</div> 5m Chamber F		<div style="border: 1px solid black; padding: 2px; text-align: center;">Pre-amplifer</div> T34 8449B		<div style="border: 1px solid black; padding: 2px; text-align: center;">Filter</div> Filter 1		<div style="border: 1px solid black; padding: 2px; text-align: center;">Limit</div> Part 22				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM850 EGPRS	Low Ch, 824.2MHz									
	1.648	-18.0	V	3.0	37.4	1.0	-54.4	-13.0	-41.4	
	2.473	-12.7	V	3.0	36.4	1.0	-48.1	-13.0	-35.1	
	3.297	-10.9	V	3.0	35.8	1.0	-45.7	-13.0	-32.7	
	1.648	-17.6	H	3.0	37.4	1.0	-54.0	-13.0	-41.0	
	2.473	-15.1	H	3.0	36.4	1.0	-50.5	-13.0	-37.5	
	3.297	-11.2	H	3.0	35.8	1.0	-46.0	-13.0	-33.0	
	Mid Ch, 836.6MHz									
	1.673	-17.8	V	3.0	37.3	1.0	-54.1	-13.0	-41.1	
	2.510	-13.1	V	3.0	36.4	1.0	-48.4	-13.0	-35.4	
	3.346	-10.6	V	3.0	35.8	1.0	-45.4	-13.0	-32.4	
	1.673	-18.6	H	3.0	37.3	1.0	-54.9	-13.0	-41.9	
	2.510	-13.7	H	3.0	36.4	1.0	-49.1	-13.0	-36.1	
	3.346	-11.0	H	3.0	35.8	1.0	-45.8	-13.0	-32.8	
	High Ch, 848.8MHz									
1.698	-18.4	V	3.0	37.3	1.0	-54.7	-13.0	-41.7		
2.547	-12.8	V	3.0	36.3	1.0	-48.2	-13.0	-35.2		
3.395	-10.8	V	3.0	35.7	1.0	-45.5	-13.0	-32.5		
1.698	-17.8	H	3.0	37.3	1.0	-54.1	-13.0	-41.1		
2.547	-14.8	H	3.0	36.3	1.0	-50.1	-13.0	-37.1		
3.395	-10.5	H	3.0	35.7	1.0	-45.2	-13.0	-32.2		
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17929								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu / Steven Her								
<b>Configuration:</b>		EUT w/ AC adaptor and HS								
<b>Mode:</b>		GPRS 850 HARM								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber F		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	<b>Low Ch, 824.2MHz</b>									
GSM850	1.648	-17.7	V	3.0	37.4	1.0	-54.1	-13.0	-41.1	
	2.473	-13.5	V	3.0	36.4	1.0	-48.9	-13.0	-35.9	
	3.297	-10.7	V	3.0	35.8	1.0	-45.5	-13.0	-32.5	
GPRS	1.648	-18.1	H	3.0	37.4	1.0	-54.5	-13.0	-41.5	
	2.473	-15.1	H	3.0	36.4	1.0	-50.5	-13.0	-37.5	
	3.297	-12.0	H	3.0	35.8	1.0	-46.8	-13.0	-33.8	
	<b>Mid Ch, 836.6MHz</b>									
	1.673	-18.9	V	3.0	37.3	1.0	-55.3	-13.0	-42.3	
	2.510	-11.6	V	3.0	36.4	1.0	-47.0	-13.0	-34.0	
	3.346	-10.6	V	3.0	35.8	1.0	-45.4	-13.0	-32.4	
	1.673	-18.5	H	3.0	37.3	1.0	-54.8	-13.0	-41.8	
	2.510	-15.1	H	3.0	36.4	1.0	-50.5	-13.0	-37.5	
	3.346	-11.8	H	3.0	35.8	1.0	-46.6	-13.0	-33.6	
	<b>High Ch, 848.8MHz</b>									
	1.698	-17.6	V	3.0	37.3	1.0	-53.9	-13.0	-40.9	
	2.547	-12.2	V	3.0	36.3	1.0	-47.5	-13.0	-34.5	
	3.395	-10.3	V	3.0	35.7	1.0	-45.0	-13.0	-32.0	
	1.698	-18.6	H	3.0	37.3	1.0	-54.9	-13.0	-41.9	
	2.547	-12.7	H	3.0	36.3	1.0	-48.0	-13.0	-35.0	
	3.395	-11.2	H	3.0	35.7	1.0	-45.9	-13.0	-32.9	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17929								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu/ S. Her								
<b>Configuration:</b>		EUT only, Z position								
<b>Mode:</b>		LTE Band 7 16QAM 20MHz								
Chamber		Pre-amplifer			Filter		Limit			
5m Chamber F		T34 8449B			Filter 1		Part 27			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE7 20MHz 16QAM	Low Ch, 2510MHz									
	5.020	-5.8	V	3.0	34.8	1.0	-39.5	-25.0	-14.5	
	7.530	-5.4	V	3.0	34.9	1.0	-39.4	-25.0	-14.4	
	10.040	-3.5	V	3.0	35.3	1.0	-37.8	-25.0	-12.8	
	5.020	-4.7	H	3.0	34.8	1.0	-38.4	-25.0	-13.4	
	7.530	-3.5	H	3.0	34.9	1.0	-37.5	-25.0	-12.5	
	10.040	-1.6	H	3.0	35.3	1.0	-35.9	-25.0	-10.9	
	Mid Ch, 2535MHz									
	5.070	-6.4	V	3.0	34.7	1.0	-40.1	-25.0	-15.1	
	7.605	-2.1	V	3.0	34.9	1.0	-36.0	-25.0	-11.0	
	10.140	-1.4	V	3.0	35.3	1.0	-35.7	-25.0	-10.7	
	5.070	-3.7	H	3.0	34.7	1.0	-37.5	-25.0	-12.5	
	7.605	-1.7	H	3.0	34.9	1.0	-35.7	-25.0	-10.7	
	10.140	-1.8	H	3.0	35.3	1.0	-36.1	-25.0	-11.1	
	High Ch, 2560MHz									
5.120	-6.3	V	3.0	34.7	1.0	-40.0	-25.0	-15.0		
7.680	-4.6	V	3.0	35.0	1.0	-38.6	-25.0	-13.6		
10.240	-2.3	V	3.0	35.2	1.0	-36.5	-25.0	-11.5		
5.120	-4.9	H	3.0	34.7	1.0	-38.6	-25.0	-13.6		
7.680	-1.2	H	3.0	35.0	1.0	-35.1	-25.0	-10.1		
10.240	0.8	H	3.0	35.2	1.0	-33.4	-25.0	-8.4		
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17929								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu/ S. Her								
<b>Configuration:</b>		EUT only, Z position								
<b>Mode:</b>		LTE Band 7 QPSK 20MHz								
Chamber		Pre-amplifer			Filter		Limit			
5m Chamber F		T34 8449B			Filter 1		Part 27			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 2510MHz									
	5.020	-6.6	V	3.0	34.8	1.0	-40.4	-25.0	-15.4	
	7.530	-4.5	V	3.0	34.9	1.0	-38.4	-25.0	-13.4	
20MHz	10.040	-1.6	V	3.0	35.3	1.0	-36.0	-25.0	-11.0	
	5.020	-4.9	H	3.0	34.8	1.0	-38.6	-25.0	-13.6	
QPSK	7.530	-0.7	H	3.0	34.9	1.0	-34.6	-25.0	-9.6	
	10.040	-1.4	H	3.0	35.3	1.0	-35.8	-25.0	-10.8	
	Mid Ch, 2535MHz									
	5.070	-5.6	V	3.0	34.7	1.0	-39.3	-25.0	-14.3	
	7.605	-4.0	V	3.0	34.9	1.0	-37.9	-25.0	-12.9	
	10.140	-2.3	V	3.0	35.3	1.0	-36.5	-25.0	-11.5	
	5.070	-3.7	H	3.0	34.7	1.0	-37.4	-25.0	-12.4	
	7.605	-3.7	H	3.0	34.9	1.0	-37.7	-25.0	-12.7	
	10.140	-0.7	H	3.0	35.3	1.0	-35.0	-25.0	-10.0	
	High Ch, 2560MHz									
	5.120	-5.5	V	3.0	34.7	1.0	-39.2	-25.0	-14.2	
	7.680	-4.0	V	3.0	35.0	1.0	-37.9	-25.0	-12.9	
	10.240	-2.6	V	3.0	35.2	1.0	-36.8	-25.0	-11.8	
	5.120	-4.9	H	3.0	34.7	1.0	-38.6	-25.0	-13.6	
	7.680	-4.3	H	3.0	35.0	1.0	-38.2	-25.0	-13.2	
	10.240	1.5	H	3.0	35.2	1.0	-32.8	-25.0	-7.8	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17929								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu/ S. Her								
<b>Configuration:</b>		EUT only, Z position								
<b>Mode:</b>		LTE Band 7 16QAM 15MHz								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber F		T34 8449B			Filter 1		Part 27			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE7 15MHz 16QAM	Low Ch, 2507.5MHz									
	5.015	-6.6	V	3.0	34.8	1.0	-40.4	-25.0	-15.4	
	7.523	-3.6	V	3.0	34.9	1.0	-37.6	-25.0	-12.6	
	10.030	-2.7	V	3.0	35.3	1.0	-37.1	-25.0	-12.1	
	5.015	-5.6	H	3.0	34.8	1.0	-39.4	-25.0	-14.4	
	7.523	-1.3	H	3.0	34.9	1.0	-35.2	-25.0	-10.2	
	10.030	-2.2	H	3.0	35.3	1.0	-36.5	-25.0	-11.5	
	Mid Ch, 2535MHz									
	5.070	-7.5	V	3.0	34.7	1.0	-41.2	-25.0	-16.2	
	7.605	-5.0	V	3.0	34.9	1.0	-39.0	-25.0	-14.0	
	10.140	-2.2	V	3.0	35.3	1.0	-36.4	-25.0	-11.4	
	5.070	-6.4	H	3.0	34.7	1.0	-40.2	-25.0	-15.2	
7.605	-1.4	H	3.0	34.9	1.0	-35.3	-25.0	-10.3		
10.140	-0.3	H	3.0	35.3	1.0	-34.6	-25.0	-9.6		
High Ch, 2562.5MHz										
5.125	-6.3	V	3.0	34.7	1.0	-40.1	-25.0	-15.1		
7.688	-4.1	V	3.0	35.0	1.0	-38.1	-25.0	-13.1		
10.250	-1.4	V	3.0	35.2	1.0	-35.6	-25.0	-10.6		
5.125	-4.2	H	3.0	34.7	1.0	-38.0	-25.0	-13.0		
7.688	-2.1	H	3.0	35.0	1.0	-36.1	-25.0	-11.1		
10.250	0.8	H	3.0	35.2	1.0	-33.5	-25.0	-8.5		
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17929								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu/ S. Her								
<b>Configuration:</b>		EUT only, Z position								
<b>Mode:</b>		LTE Band 7 QPSK 15MHz								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber F		T34 8449B			Filter 1		Part 27			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE7 15MHz QPSK	<b>Low Ch, 2507.5MHz</b>									
	5.015	-5.5	V	3.0	34.8	1.0	-39.3	-25.0	-14.3	
	7.523	-2.7	V	3.0	34.9	1.0	-36.7	-25.0	-11.7	
	10.030	-2.1	V	3.0	35.3	1.0	-36.4	-25.0	-11.4	
	5.015	-3.7	H	3.0	34.8	1.0	-37.5	-25.0	-12.5	
	7.523	-3.5	H	3.0	34.9	1.0	-37.4	-25.0	-12.4	
	10.030	-1.3	H	3.0	35.3	1.0	-35.6	-25.0	-10.6	
	<b>Mid Ch, 2535MHz</b>									
	5.070	-7.0	V	3.0	34.7	1.0	-40.8	-25.0	-15.8	
	7.605	-5.4	V	3.0	34.9	1.0	-39.4	-25.0	-14.4	
	10.140	-2.4	V	3.0	35.3	1.0	-36.7	-25.0	-11.7	
	5.070	-4.5	H	3.0	34.7	1.0	-38.3	-25.0	-13.3	
	7.605	-2.2	H	3.0	34.9	1.0	-36.2	-25.0	-11.2	
	10.140	-0.8	H	3.0	35.3	1.0	-35.1	-25.0	-10.1	
	<b>High Ch, 2562.5MHz</b>									
5.125	-6.4	V	3.0	34.7	1.0	-40.1	-25.0	-15.1		
7.688	-4.3	V	3.0	35.0	1.0	-38.3	-25.0	-13.3		
10.250	-0.2	V	3.0	35.2	1.0	-34.4	-25.0	-9.4		
5.125	-5.4	H	3.0	34.7	1.0	-39.1	-25.0	-14.1		
7.688	-1.9	H	3.0	35.0	1.0	-35.9	-25.0	-10.9		
10.250	-0.7	H	3.0	35.2	1.0	-34.9	-25.0	-9.9		
Rev. 03.03.09										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b> Sony <b>Project #:</b> 14U17929 <b>Date:</b> 07/09/14 <b>Test Engineer:</b> B. Liu/ S. Her <b>Configuration:</b> EUT only, Z position <b>Mode:</b> LTE Band 7 16QAM 10MHz										
		Chamber	Pre-amplifer		Filter		Limit			
		5m Chamber F	T34 8449B		Filter 1		Part 27			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE7  10MHz  16QAM	<b>Low Ch, 2505MHz</b>									
	5.010	-6.2	V	3.0	34.8	1.0	-39.9	-25.0	-14.9	
	7.515	-5.4	V	3.0	34.9	1.0	-39.3	-25.0	-14.3	
	10.020	-2.3	V	3.0	35.4	1.0	-36.7	-25.0	-11.7	
	5.010	-5.7	H	3.0	34.8	1.0	-39.4	-25.0	-14.4	
	7.515	-1.0	H	3.0	34.9	1.0	-34.9	-25.0	-9.9	
	10.020	-1.3	H	3.0	35.4	1.0	-35.6	-25.0	-10.6	
	<b>Mid Ch, 2535MHz</b>									
	5.070	-5.3	V	3.0	34.7	1.0	-39.1	-25.0	-14.1	
	7.605	-5.0	V	3.0	34.9	1.0	-38.9	-25.0	-13.9	
	10.140	-2.8	V	3.0	35.3	1.0	-37.1	-25.0	-12.1	
	5.070	-6.7	H	3.0	34.7	1.0	-40.5	-25.0	-15.5	
	7.605	-2.4	H	3.0	34.9	1.0	-36.3	-25.0	-11.3	
	10.140	-0.1	H	3.0	35.3	1.0	-34.4	-25.0	-9.4	
	<b>High Ch, 2565MHz</b>									
5.130	-6.2	V	3.0	34.7	1.0	-39.9	-25.0	-14.9		
7.695	-3.7	V	3.0	35.0	1.0	-37.7	-25.0	-12.7		
10.260	-2.1	V	3.0	35.2	1.0	-36.4	-25.0	-11.4		
5.130	-6.0	H	3.0	34.7	1.0	-39.8	-25.0	-14.8		
7.695	-1.6	H	3.0	35.0	1.0	-35.6	-25.0	-10.6		
10.260	-0.5	H	3.0	35.2	1.0	-34.8	-25.0	-9.8		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17929								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu/ S. Her								
<b>Configuration:</b>		EUT only, Z position								
<b>Mode:</b>		LTE Band 7 QPSK 10MHz								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber F		T34 8449B			Filter 1		Part 27			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE7	Low Ch, 2505MHz									
	5.015	-5.6	V	3.0	34.8	1.0	-39.3	-25.0	-14.3	
	7.523	-3.3	V	3.0	34.9	1.0	-37.2	-25.0	-12.2	
10MHz	10.030									
	5.015	-2.9	V	3.0	35.3	1.0	-37.3	-25.0	-12.3	
	5.015	-5.4	H	3.0	34.8	1.0	-39.2	-25.0	-14.2	
QPSK	7.523									
	7.523	-2.9	H	3.0	34.9	1.0	-36.8	-25.0	-11.8	
	10.030	0.4	H	3.0	35.3	1.0	-33.9	-25.0	-8.9	
Mid Ch, 2535MHz										
	5.070	-6.7	V	3.0	34.7	1.0	-40.5	-25.0	-15.5	
	7.605	-3.1	V	3.0	34.9	1.0	-37.0	-25.0	-12.0	
	10.140	-3.1	V	3.0	35.3	1.0	-37.4	-25.0	-12.4	
	5.070	-5.5	H	3.0	34.7	1.0	-39.2	-25.0	-14.2	
	7.605	-1.4	H	3.0	34.9	1.0	-35.3	-25.0	-10.3	
	10.140	1.2	H	3.0	35.3	1.0	-33.1	-25.0	-8.1	
High Ch, 2565MHz										
	5.125	-8.0	V	3.0	34.7	1.0	-41.7	-25.0	-16.7	
	7.688	-3.7	V	3.0	35.0	1.0	-37.6	-25.0	-12.6	
	10.250	0.2	V	3.0	35.2	1.0	-34.0	-25.0	-9.0	
	5.125	-4.7	H	3.0	34.7	1.0	-38.4	-25.0	-13.4	
	7.688	-2.0	H	3.0	35.0	1.0	-36.0	-25.0	-11.0	
	10.250	-0.9	H	3.0	35.2	1.0	-35.2	-25.0	-10.2	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17929								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu/ S. Her								
<b>Configuration:</b>		EUT only, Z position								
<b>Mode:</b>		LTE Band 7 16QAM 5.0MHz								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber F		T34 8449B			Filter 1		Part 27			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	<b>Low Ch, 2502.5MHz</b>									
	5.005	-7.0	V	3.0	34.8	1.0	-40.7	-25.0	-15.7	
	7.508	-5.1	V	3.0	34.9	1.0	-39.0	-25.0	-14.0	
5MHz	10.010	-2.3	V	3.0	35.4	1.0	-36.6	-25.0	-11.6	
	5.005	-3.5	H	3.0	34.8	1.0	-37.3	-25.0	-12.3	
16QAM	7.508	-3.2	H	3.0	34.9	1.0	-37.2	-25.0	-12.2	
	10.010	-0.6	H	3.0	35.4	1.0	-34.9	-25.0	-9.9	
	<b>Mid Ch, 2535MHz</b>									
	5.070	-6.0	V	3.0	34.7	1.0	-39.8	-25.0	-14.8	
	7.605	-3.0	V	3.0	34.9	1.0	-37.0	-25.0	-12.0	
	10.140	-2.8	V	3.0	35.3	1.0	-37.1	-25.0	-12.1	
	5.070	-6.1	H	3.0	34.7	1.0	-39.8	-25.0	-14.8	
	7.605	-3.8	H	3.0	34.9	1.0	-37.8	-25.0	-12.8	
	10.140	-0.6	H	3.0	35.3	1.0	-34.9	-25.0	-9.9	
	<b>High Ch, 2567.5MHz</b>									
	5.135	-5.7	V	3.0	34.7	1.0	-39.4	-25.0	-14.4	
	7.703	-4.5	V	3.0	35.0	1.0	-38.4	-25.0	-13.4	
	10.270	0.0	V	3.0	35.2	1.0	-34.2	-25.0	-9.2	
	5.135	-5.2	H	3.0	34.7	1.0	-38.9	-25.0	-13.9	
	7.703	-2.6	H	3.0	35.0	1.0	-36.6	-25.0	-11.6	
	10.270	-0.5	H	3.0	35.2	1.0	-34.7	-25.0	-9.7	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17929								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu/ S. Her								
<b>Configuration:</b>		EUT only, Z position								
<b>Mode:</b>		LTE Band 7 QPSK 5.0MHz								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber F		T34 8449B			Filter 1		Part 27			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	<b>Low Ch, 2502.5MHz</b>									
	5.005	-6.0	V	3.0	34.8	1.0	-39.7	-25.0	-14.7	
	7.508	-3.6	V	3.0	34.9	1.0	-37.5	-25.0	-12.5	
5MHz	10.010	-3.4	V	3.0	35.4	1.0	-37.8	-25.0	-12.8	
	5.005	-4.6	H	3.0	34.8	1.0	-38.3	-25.0	-13.3	
QPSK	7.508	-3.1	H	3.0	34.9	1.0	-37.1	-25.0	-12.1	
	10.010	0.3	H	3.0	35.4	1.0	-34.1	-25.0	-9.1	
	<b>Mid Ch, 2535MHz</b>									
	5.070	-4.5	V	3.0	34.7	1.0	-38.2	-25.0	-13.2	
	7.605	-3.5	V	3.0	34.9	1.0	-37.5	-25.0	-12.5	
	10.140	-1.2	V	3.0	35.3	1.0	-35.5	-25.0	-10.5	
	5.070	-3.5	H	3.0	34.7	1.0	-37.2	-25.0	-12.2	
	7.605	-1.2	H	3.0	34.9	1.0	-35.1	-25.0	-10.1	
	10.140	0.2	H	3.0	35.3	1.0	-34.1	-25.0	-9.1	
	<b>High Ch, 2567.5MHz</b>									
	5.135	-4.3	V	3.0	34.7	1.0	-38.0	-25.0	-13.0	
	7.703	-3.7	V	3.0	35.0	1.0	-37.7	-25.0	-12.7	
	10.270	-2.1	V	3.0	35.2	1.0	-36.3	-25.0	-11.3	
	5.135	-5.8	H	3.0	34.7	1.0	-39.5	-25.0	-14.5	
	7.703	-3.3	H	3.0	35.0	1.0	-37.2	-25.0	-12.2	
	10.270	-1.1	H	3.0	35.2	1.0	-35.3	-25.0	-10.3	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17929								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu / Steven Her								
<b>Configuration:</b>		EUT w/ AC adaptor and HS								
<b>Mode:</b>		LET5 10M 16QAM								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber B		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE5 10MHz 16QAM	Low Ch, 829MHz									
	1.658	-18.0	V	3.0	37.4	1.0	-54.4	-13.0	-41.4	
	2.487	-12.7	V	3.0	36.4	1.0	-48.1	-13.0	-35.1	
	3.316	-11.7	V	3.0	35.8	1.0	-46.5	-13.0	-33.5	
	1.658	-18.7	H	3.0	37.4	1.0	-55.0	-13.0	-42.0	
	2.487	-15.4	H	3.0	36.4	1.0	-50.8	-13.0	-37.8	
	3.316	-11.6	H	3.0	35.8	1.0	-46.4	-13.0	-33.4	
	Mid Ch, 836.5MHz									
	1.673	-19.3	V	3.0	37.3	1.0	-55.7	-13.0	-42.7	
	2.510	-12.6	V	3.0	36.4	1.0	-48.0	-13.0	-35.0	
	3.346	-11.3	V	3.0	35.8	1.0	-46.0	-13.0	-33.0	
	1.673	-18.7	H	3.0	37.3	1.0	-55.0	-13.0	-42.0	
2.510	-14.6	H	3.0	36.4	1.0	-49.9	-13.0	-36.9		
3.346	-11.4	H	3.0	35.8	1.0	-46.2	-13.0	-33.2		
High Ch, 844MHz										
1.688	-17.2	V	3.0	37.3	1.0	-53.5	-13.0	-40.5		
2.532	-12.2	V	3.0	36.3	1.0	-47.5	-13.0	-34.5		
3.376	-10.4	V	3.0	35.7	1.0	-45.1	-13.0	-32.1		
1.688	-18.2	H	3.0	37.3	1.0	-54.5	-13.0	-41.5		
2.532	-14.3	H	3.0	36.3	1.0	-49.6	-13.0	-36.6		
3.376	-9.9	H	3.0	35.7	1.0	-44.6	-13.0	-31.6		
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17929								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu / Steven Her								
<b>Configuration:</b>		EUT w/ AC adaptor and HS								
<b>Mode:</b>		LET5 10M QPSK								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber B		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	<b>Low Ch, 829MHz</b>									
	1.658	-17.8	V	3.0	37.4	1.0	-54.2	-13.0	-41.2	
	2.487	-11.7	V	3.0	36.4	1.0	-47.1	-13.0	-34.1	
10MHz	3.316	-9.8	V	3.0	35.8	1.0	-44.5	-13.0	-31.5	
	1.658	-18.8	H	3.0	37.4	1.0	-55.2	-13.0	-42.2	
QPSK	2.487	-14.5	H	3.0	36.4	1.0	-49.9	-13.0	-36.9	
	3.316	-11.3	H	3.0	35.8	1.0	-46.1	-13.0	-33.1	
	<b>Mid Ch, 836.5MHz</b>									
	1.673	-18.2	V	3.0	37.3	1.0	-54.5	-13.0	-41.5	
	2.510	-13.1	V	3.0	36.4	1.0	-48.4	-13.0	-35.4	
	3.346	-11.4	V	3.0	35.8	1.0	-46.1	-13.0	-33.1	
	1.673	-18.1	H	3.0	37.3	1.0	-54.4	-13.0	-41.4	
	2.510	-13.9	H	3.0	36.4	1.0	-49.2	-13.0	-36.2	
	3.346	-10.7	H	3.0	35.8	1.0	-45.5	-13.0	-32.5	
	<b>High Ch, 844MHz</b>									
	1.688	-18.2	V	3.0	37.3	1.0	-54.5	-13.0	-41.5	
	2.532	-12.7	V	3.0	36.3	1.0	-48.0	-13.0	-35.0	
	3.376	-10.6	V	3.0	35.7	1.0	-45.3	-13.0	-32.3	
	1.688	-18.3	H	3.0	37.3	1.0	-54.7	-13.0	-41.7	
	2.532	-14.9	H	3.0	36.3	1.0	-50.2	-13.0	-37.2	
	3.376	-10.7	H	3.0	35.7	1.0	-45.4	-13.0	-32.4	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement											
<b>Company:</b>		Sony									
<b>Project #:</b>		14U17929									
<b>Date:</b>		07/09/14									
<b>Test Engineer:</b>		B. Liu / Steven Her									
<b>Configuration:</b>		EUT w/ AC adaptor and HS									
<b>Mode:</b>		LET5 5M 16QAM									
Chamber		Pre-amplifer			Filter		Limit				
5m Chamber B		T34 8449B			Filter 1		Part 22				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
16QAM	Low Ch, 826.5MHz										
	LTE5	1.653	-18.2	V	3.0	37.4	1.0	-54.6	-13.0	-41.6	
		2.480	-11.9	V	3.0	36.4	1.0	-47.3	-13.0	-34.3	
	5MHz	3.306	-11.6	V	3.0	35.8	1.0	-46.4	-13.0	-33.4	
		1.653	-18.4	H	3.0	37.4	1.0	-54.8	-13.0	-41.8	
		2.480	-14.6	H	3.0	36.4	1.0	-50.0	-13.0	-37.0	
		3.306	-11.5	H	3.0	35.8	1.0	-46.3	-13.0	-33.3	
	Mid Ch, 836.5MHz										
		1.673	-18.3	V	3.0	37.3	1.0	-54.6	-13.0	-41.6	
		2.510	-12.1	V	3.0	36.4	1.0	-47.5	-13.0	-34.5	
		3.346	-9.3	V	3.0	35.8	1.0	-44.1	-13.0	-31.1	
		1.673	-17.5	H	3.0	37.3	1.0	-53.9	-13.0	-40.9	
		2.510	-14.5	H	3.0	36.4	1.0	-49.8	-13.0	-36.8	
		3.346	-9.8	H	3.0	35.8	1.0	-44.5	-13.0	-31.5	
	High Ch, 846.5MHz										
		1.693	-16.9	V	3.0	37.3	1.0	-53.2	-13.0	-40.2	
		2.539	-12.6	V	3.0	36.3	1.0	-48.0	-13.0	-35.0	
		3.386	-10.9	V	3.0	35.7	1.0	-45.6	-13.0	-32.6	
	1.693	-18.0	H	3.0	37.3	1.0	-54.3	-13.0	-41.3		
	2.539	-13.0	H	3.0	36.3	1.0	-48.3	-13.0	-35.3		
	3.386	-10.5	H	3.0	35.7	1.0	-45.2	-13.0	-32.2		
Rev. 03.03.09											
Note: No other emissions were detected above the system noise floor.											

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17929								
<b>Date:</b>		07/09/14								
<b>Test Engineer:</b>		B. Liu / Steven Her								
<b>Configuration:</b>		EUT w/ AC adaptor and HS								
<b>Mode:</b>		LET5 5M QPSK								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber B		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	<b>Low Ch, 826.5MHz</b>									
	1.653	-18.6	V	3.0	37.4	1.0	-55.0	-13.0	-42.0	
	2.480	-13.1	V	3.0	36.4	1.0	-48.5	-13.0	-35.5	
5MHz	3.306	-10.9	V	3.0	35.8	1.0	-45.7	-13.0	-32.7	
	1.653	-17.2	H	3.0	37.4	1.0	-53.6	-13.0	-40.6	
	2.480	-14.6	H	3.0	36.4	1.0	-50.0	-13.0	-37.0	
QPSK	3.306	-12.0	H	3.0	35.8	1.0	-46.8	-13.0	-33.8	
	<b>Mid Ch, 836.5MHz</b>									
	1.673	-18.0	V	3.0	37.3	1.0	-54.4	-13.0	-41.4	
	2.510	-12.2	V	3.0	36.4	1.0	-47.6	-13.0	-34.6	
	3.346	-10.8	V	3.0	35.8	1.0	-45.5	-13.0	-32.5	
	1.673	-17.4	H	3.0	37.3	1.0	-53.7	-13.0	-40.7	
	2.510	-13.0	H	3.0	36.4	1.0	-48.3	-13.0	-35.3	
	3.346	-11.7	H	3.0	35.8	1.0	-46.5	-13.0	-33.5	
	<b>High Ch, 846.5MHz</b>									
	1.693	-17.3	V	3.0	37.3	1.0	-53.6	-13.0	-40.6	
	2.539	-12.2	V	3.0	36.3	1.0	-47.5	-13.0	-34.5	
	3.386	-9.9	V	3.0	35.7	1.0	-44.7	-13.0	-31.7	
	1.693	-18.2	H	3.0	37.3	1.0	-54.5	-13.0	-41.5	
	2.539	-14.0	H	3.0	36.3	1.0	-49.4	-13.0	-36.4	
	3.386	-10.9	H	3.0	35.7	1.0	-45.6	-13.0	-32.6	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17927								
<b>Date:</b>		07/08/14								
<b>Test Engineer:</b>		O. Stoelting								
<b>Configuration:</b>		Y-pos EUT w/ AC Adaptor								
<b>Mode:</b>		LTE5 3M 16QAM HARM								
Chamber		Pre-amplifer			Filter		Limit			
5m Chamber A		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE5 3MHz 16QAM	Low Ch, 825.5MHz									
	1.651	-19.4	V	3.0	37.4	1.0	-55.8	-13.0	-42.8	
	2.477	-20.1	V	3.0	36.4	1.0	-55.5	-13.0	-42.5	
	3.302	-21.5	V	3.0	35.8	1.0	-56.3	-13.0	-43.3	
	1.651	-21.2	H	3.0	37.4	1.0	-57.6	-13.0	-44.6	
	2.477	-17.4	H	3.0	36.4	1.0	-52.8	-13.0	-39.8	
	3.302	-22.2	H	3.0	35.8	1.0	-56.9	-13.0	-43.9	
	Mid Ch, 836.5MHz									
	1.673	-19.9	V	3.0	37.3	1.0	-56.2	-13.0	-43.2	
	2.510	-21.2	V	3.0	36.4	1.0	-56.6	-13.0	-43.6	
	3.346	-21.9	V	3.0	35.8	1.0	-56.7	-13.0	-43.7	
	1.673	-19.9	H	3.0	37.3	1.0	-56.2	-13.0	-43.2	
2.510	-21.5	H	3.0	36.4	1.0	-56.9	-13.0	-43.9		
3.346	-22.3	H	3.0	35.8	1.0	-57.0	-13.0	-44.0		
High Ch, 847.5MHz										
1.695	-18.8	V	3.0	37.3	1.0	-55.1	-13.0	-42.1		
2.543	-17.4	V	3.0	36.3	1.0	-52.7	-13.0	-39.7		
3.390	-21.0	V	3.0	35.7	1.0	-55.7	-13.0	-42.7		
1.695	-18.5	H	3.0	37.3	1.0	-54.8	-13.0	-41.8		
2.543	-20.3	H	3.0	36.3	1.0	-55.7	-13.0	-42.7		
3.390	-22.7	H	3.0	35.7	1.0	-57.4	-13.0	-44.4		
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17927								
<b>Date:</b>		07/08/14								
<b>Test Engineer:</b>		O. Stoelting								
<b>Configuration:</b>		Y-pos EUT w/ AC Adaptor								
<b>Mode:</b>		LTE5 3M QPSK HARM								
<b>Chamber</b>		<b>Pre-amplifer</b>			<b>Filter</b>		<b>Limit</b>			
5m Chamber A		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	<b>Low Ch, 825.5MHz</b>									
	1.651	-19.4	V	3.0	37.4	1.0	-55.8	-13.0	-42.8	
	2.477	-20.3	V	3.0	36.4	1.0	-55.7	-13.0	-42.7	
3MHz	3.302	-22.4	V	3.0	35.8	1.0	-57.2	-13.0	-44.2	
	1.651	-20.9	H	3.0	37.4	1.0	-57.3	-13.0	-44.3	
QPSK	2.477	-17.6	H	3.0	36.4	1.0	-53.0	-13.0	-40.0	
	3.302	-22.0	H	3.0	35.8	1.0	-56.8	-13.0	-43.8	
	<b>Mid Ch, 836.5MHz</b>									
	1.673	-19.8	V	3.0	37.3	1.0	-56.2	-13.0	-43.2	
	2.510	-21.2	V	3.0	36.4	1.0	-56.5	-13.0	-43.5	
	3.346	-21.6	V	3.0	35.8	1.0	-56.3	-13.0	-43.3	
	1.673	-20.5	H	3.0	37.3	1.0	-56.8	-13.0	-43.8	
	2.510	-21.4	H	3.0	36.4	1.0	-56.7	-13.0	-43.7	
	3.346	-22.2	H	3.0	35.8	1.0	-56.9	-13.0	-43.9	
	<b>High Ch, 847.5MHz</b>									
	1.695	-19.4	V	3.0	37.3	1.0	-55.8	-13.0	-42.8	
	2.543	-18.2	V	3.0	36.3	1.0	-53.5	-13.0	-40.5	
	3.390	-21.6	V	3.0	35.7	1.0	-56.3	-13.0	-43.3	
	1.695	-19.2	H	3.0	37.3	1.0	-55.5	-13.0	-42.5	
	2.543	-20.3	H	3.0	36.3	1.0	-55.6	-13.0	-42.6	
	3.390	-23.0	H	3.0	35.7	1.0	-57.7	-13.0	-44.7	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		Sony								
Project #:		14U17927								
Date:		07/08/14								
Test Engineer:		O. Stoelting								
Configuration:		Y-pos EUT w/ AC Adaptor								
Mode:		LTE5 1.4M 16QAM HARM								
Chamber		Pre-amplifer		Filter		Limit				
5m Chamber A		T34 8449B		Filter 1		Part 22				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE5 1.4MHz 16QAM	Low Ch, 824.7MHz									
	1.649	-19.7	V	3.0	37.4	1.0	-56.1	-13.0	-43.1	
	2.474	-19.5	V	3.0	36.4	1.0	-54.8	-13.0	-41.8	
	3.299	-21.9	V	3.0	35.8	1.0	-56.7	-13.0	-43.7	
	1.649	-20.6	H	3.0	37.4	1.0	-57.0	-13.0	-44.0	
	2.474	-18.6	H	3.0	36.4	1.0	-54.0	-13.0	-41.0	
	3.299	-21.7	H	3.0	35.8	1.0	-56.5	-13.0	-43.5	
	Mid Ch, 836.5MHz									
	1.673	-23.9	V	3.0	37.3	1.0	-60.2	-13.0	-47.2	
	2.510	-22.5	V	3.0	36.4	1.0	-57.9	-13.0	-44.9	
	3.346	-21.1	V	3.0	35.8	1.0	-55.8	-13.0	-42.8	
	1.673	-21.7	H	3.0	37.3	1.0	-58.0	-13.0	-45.0	
2.510	-22.7	H	3.0	36.4	1.0	-58.1	-13.0	-45.1		
3.346	-21.7	H	3.0	35.8	1.0	-56.4	-13.0	-43.4		
High Ch, 848.3MHz										
1.697	-25.0	V	3.0	37.3	1.0	-61.3	-13.0	-48.3		
2.545	-23.3	V	3.0	36.3	1.0	-58.6	-13.0	-45.6		
3.393	-21.8	V	3.0	35.7	1.0	-56.5	-13.0	-43.5		
1.697	-25.4	H	3.0	37.3	1.0	-61.7	-13.0	-48.7		
2.545	-20.1	H	3.0	36.3	1.0	-55.4	-13.0	-42.4		
3.393	-22.0	H	3.0	35.7	1.0	-56.7	-13.0	-43.7		
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
<b>Company:</b>		Sony								
<b>Project #:</b>		14U17927								
<b>Date:</b>		07/08/14								
<b>Test Engineer:</b>		O. Stoelting								
<b>Configuration:</b>		Y-pos EUT w/ AC Adaptor								
<b>Mode:</b>		LTE5 1.4M QPSK HARM								
Chamber		Pre-amplifer			Filter		Limit			
5m Chamber A		T34 8449B			Filter 1		Part 22			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE5 1.4MHz	Low Ch, 824.7MHz									
	1.649	-19.4	V	3.0	37.4	1.0	-55.7	-13.0	-42.7	
	2.474	-19.4	V	3.0	36.4	1.0	-54.8	-13.0	-41.8	
	3.299	-22.1	V	3.0	35.8	1.0	-56.9	-13.0	-43.9	
	1.649	-20.4	H	3.0	37.4	1.0	-56.8	-13.0	-43.8	
	2.474	-19.3	H	3.0	36.4	1.0	-54.7	-13.0	-41.7	
QPSK	3.299	-22.3	H	3.0	35.8	1.0	-57.1	-13.0	-44.1	
	Mid Ch, 836.5MHz									
	1.673	-22.8	V	3.0	37.3	1.0	-59.2	-13.0	-46.2	
	2.510	-22.9	V	3.0	36.4	1.0	-58.3	-13.0	-45.3	
	3.346	-21.7	V	3.0	35.8	1.0	-56.4	-13.0	-43.4	
	1.673	-21.6	H	3.0	37.3	1.0	-57.9	-13.0	-44.9	
2.510	-22.6	H	3.0	36.4	1.0	-57.9	-13.0	-44.9		
3.346	-21.8	H	3.0	35.8	1.0	-56.5	-13.0	-43.5		
High Ch, 848.3MHz										
1.697	-24.6	V	3.0	37.3	1.0	-60.9	-13.0	-47.9		
2.545	-22.2	V	3.0	36.3	1.0	-57.5	-13.0	-44.5		
3.393	-22.1	V	3.0	35.7	1.0	-56.8	-13.0	-43.8		
1.697	-25.4	H	3.0	37.3	1.0	-61.7	-13.0	-48.7		
2.545	-20.9	H	3.0	36.3	1.0	-56.2	-13.0	-43.2		
3.393	-22.3	H	3.0	35.7	1.0	-57.0	-13.0	-44.0		
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										