



**FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
CERTIFICATION TEST REPORT**

FOR

GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, ANT+ & NFC

FCC ID: PY7PM-0813

REPORT NUMBER: 14U17919-1

ISSUE DATE: JULY 24, 2014

Prepared for

**SONY MOBILE COMMUNICATIONS, INC.
Nya Vattentornet Mobilvagen 10
Lund 22188
Sweden**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
--	7/24/14	Initial issue	D. Corona

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	5
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	6
4.1.	MEASURING INSTRUMENT CALIBRATION	6
4.2.	SAMPLE CALCULATION	6
4.3.	MEASUREMENT UNCERTAINTY	7
5.	EQUIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF EUT	8
5.2.	MAXIMUM OUTPUT POWER.....	8
5.3.	DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4.	DESCRIPTION OF TEST SETUP.....	10
6.	TEST AND MEASUREMENT EQUIPMENT	13
7.	Summary Table.....	14
8.	RF POWER OUTPUT VERIFICATION.....	15
8.1.	GSM/GPRS/EDGE	15
8.1.1.	GSM OUTPUT POWER RESULT	16
8.2.	UMTS REL 99.....	17
8.2.1.	UMTS REL 99 OUTPUT POWER RESULT	17
8.3.	UMTS HSDPA	18
8.3.1.	UMTS HSDPA OUTPUT POWER RESULT.....	18
8.3.2.	UMTS HSUPA	19
8.3.3.	UMTS HSUPA OUTPUT POWER RESULT.....	20
8.3.4.	DC-HSDPA.....	21
8.3.1.	UMTS DC-HSDPA OUTPUT POWER RESULT	24
9.	PEAK TO AVERAGE RATIO	25
9.1.	CONDUCTED PEAK TO AVERAGE RESULT.....	25
10.	LIMITS AND CONDUCTED RESULTS	27
10.1.	OCCUPIED BANDWIDTH.....	27
10.1.1.	OCCUPIED BANDWIDTH RESULTS.....	28
10.1.2.	OCCUPIED BANDWIDTH PLOTS	29

10.2.	<i>BAND EDGE EMISSIONS</i>	31
10.2.1.	BAND EDGE PLOTS	32
10.3.	<i>OUT OF BAND EMISSIONS</i>	35
10.3.1.	OUT OF BAND EMISSIONS RESULT	36
10.3.2.	OUT OF BAND EMISSIONS PLOTS.....	37
10.4.	<i>FREQUENCY STABILITY</i>	39
10.4.1.	FREQUENCY STABILITY RESULTS.....	40
11.	RADIATED TEST RESULTS	42
11.1.	<i>RADIATED POWER (ERP & EIRP)</i>	42
11.1.1.	ERP/EIRP Results.....	43
11.1.2.	ERP/EIRP DATA.....	44
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	50
11.2.1.	SPURIOUS RADIATION DATA.....	51
12.	SETUP PHOTOS	57

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, ANT+ & NFC
SERIAL NUMBER: YT910SJFAH
DATE TESTED: JUNE 14 & 22, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H & 24E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released

For UL Verification Services Inc. By:



DAN CORONIA
CONSUMER TECHNOLOGY DIVISION

PROJECT LEAD
UL Verification Services Inc.

Tested By:



STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION

LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input checked="" type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{EIRP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$$

$$\text{ERP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$$

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 40000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac + ANT+ & NFC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			Peak (dBm)	Peak(mW)	Peak (dBm)	Peak(mW)
GSM850	824~849	GMSK	33.1	2041.74		
	824~849	GPRS	33.2	2089.30	30.89	1227.72
	824~849	EGPRS	27.4	549.54	28.00	631.1
GSM1900	1850~1910	GMSK	30.1	1023.29		
	1850~1910	GPRS	30.2	1047.13	29.05	803.53
	1850~1910	EGPRS	25.8	380.19	27.83	606.74
Band 5	824~849	REL99	24.4	275.42	20.72	118.06
	824~849	HSDPA	24.4	275.42	20.70	117.52
	824~849	HSUPA	24.4	275.42		

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
GSM850, 824~849MHz	-1.7
GSM1900, 1850~1910MHz	-1.2
Band 5, 824~849MHz	-1.7

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SONY	EP880	3514W 01 S08328	N/A
Earphone	SONY	MH410C	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

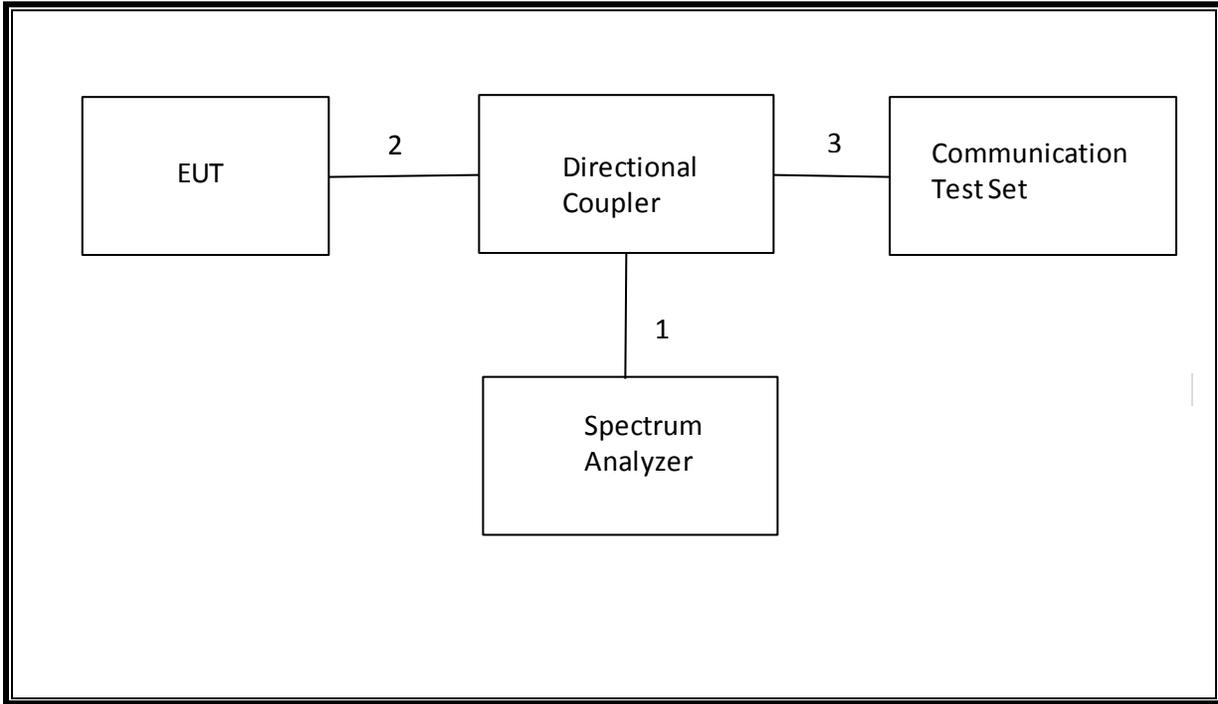

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

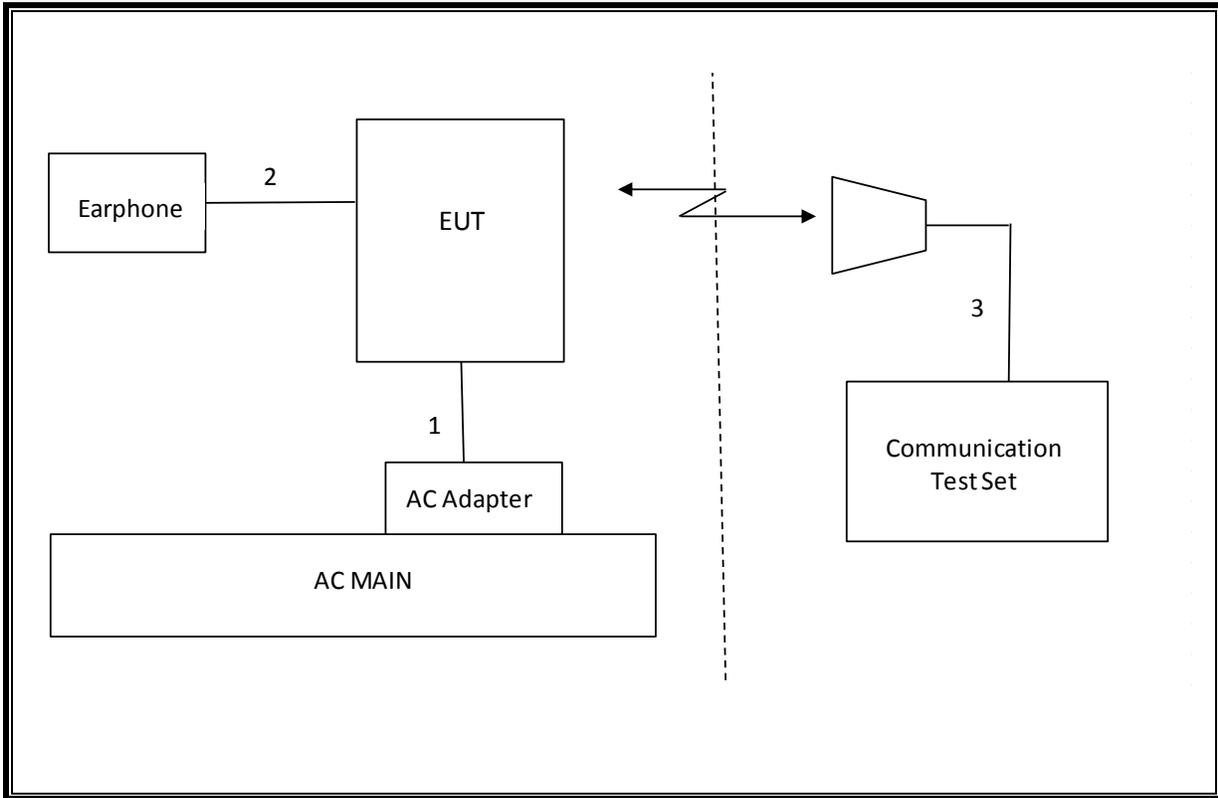

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	08/14/14
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/14
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/15
Communications Test Set	R&S	CMW500	T159	07/02/15
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/15
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/15
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/14
Antenna, Horn, 18- 26 GHz	ARA	MWH-1826/B	C00947	11/12/14

7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst case
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	4.19 MHz
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-23.71 dBm
2.1046	N/A	Conducted output power	N/A		Pass	33.2 dBm
22.355 24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability	2.5PPM		Pass	0.33 PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	30.9 dBm
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	29.1 dBm
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-17.2 dBm

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900
Press Connection control to choose the different menus
Press RESET > choose all to reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM+GPRS or GSM+EGPRS
Main Service > Packet Data
Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850/900
 > 30 dBm for GPRS1800/1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
Channel Type > Off
P0> 4 dB
Slot Config > Unchanged (if already set under MS Signal)
TCH > choose desired test channel
Hopping > Off
Main Timeslot > 3 (Default)
Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)
 Bit Stream > 2E9-1PSR Bit Pattern
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	1 time slot	2 time slot	3 time slot	4 time slot
				Peak (dBm)	Peak (dBm)	Peak (dBm)	Peak (dBm)
GSM850	GMSK	128	824.2	33.0			
		190	836.6	32.9			
		251	848.8	33.1			
	GPRS	128	824.2	33.1	30.6	28.5	27.5
		190	836.6	33.0	30.5	28.4	27.5
		251	848.8	33.2	30.8	28.8	27.8
	EGPRS	128	824.2	27.4	25.2	24.4	22.4
		190	836.6	27.4	25.3	24.5	22.4
		251	848.8	27.4	25.3	24.5	22.4
GSM1900	GMSK	512	1850.2	30.1			
		661	1880	29.9			
		810	1909.8	29.9			
	GPRS	512	1850.2	30.2	27.2	26.2	25.3
		661	1880	29.8	27.0	26.1	25.1
		810	1909.8	29.9	27.1	26.0	25.1
	EGPRS	512	1850.2	25.7	24.0	22.9	21.8
		661	1880	25.8	24.1	23.0	21.9
		810	1909.8	25.8	24.1	23.0	21.9

8.2. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	β_c	Not Applicable
	β_d	Not Applicable
	β_{ec}	Not Applicable
	β_c/β_d	8/15
	β_{hs}	Not Applicable
	β_{ed}	Not Applicable

8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	Conducted Power (dBm)
				Avg (dBm)
Band 5	REL99	4132	826.4	24.3
		4183	836.6	24.4
		4233	846.6	24.4

8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

8.3.1. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm)
					Avg (dBm)
Band 5	HSDPA	1	4132	826.4	24.1
			4183	836.6	24.3
			4233	846.6	24.4
		2	4132	826.4	23.9
			4183	836.6	24.0
			4233	846.6	24.0
		3	4132	826.4	23.8
			4183	836.6	23.9
			4233	846.6	23.9
		4	4132	826.4	23.9
			4183	836.6	23.7
			4233	846.6	23.9

8.3.2. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
β_{ed} (note1)	1309/225	94/75	47/15 47/15	56/75	134/15	
MPR	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

Note1: β_{ed} cannot be set directly, it is set by Absolute Grant Value.

8.3.3. UMTS HSUPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm)
					Avg (dBm)
Band 5	HSUPA	1	4132	826.4	23.8
			4183	836.6	24.3
			4233	846.6	23.4
		2	4132	826.4	22.4
			4183	836.6	22.8
			4233	846.6	22.6
		3	4132	826.4	23.3
			4183	836.6	23.0
			4233	846.6	22.9
		4	4132	826.4	22.6
			4183	836.6	23.0
			4233	846.6	22.8
		5	4132	826.4	24.3
			4183	836.6	24.4
			4233	846.6	24.4

8.3.4. DC-HSDPA

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

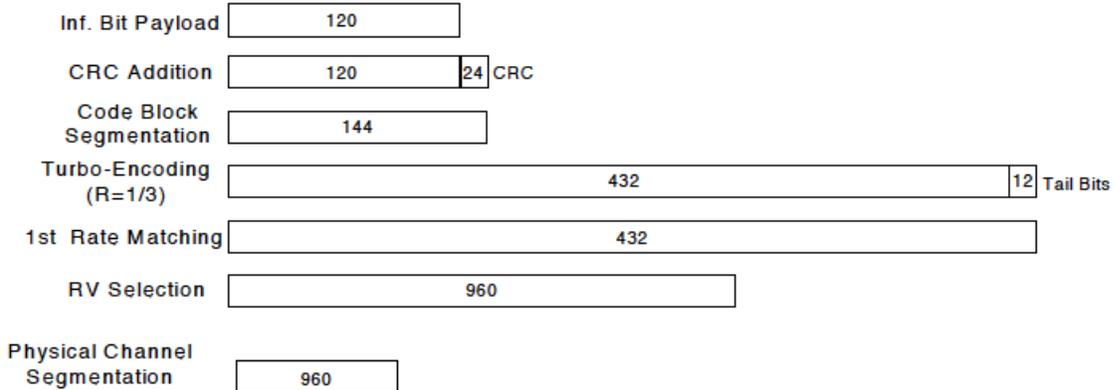


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

Up commands are set continuously to set the UE to Max power.

8.3.1. UMTS DC-HSDPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm)
					Avg (dBm)
Band 5	HSDPA	1	4132	826.4	24.3
			4183	836.6	24.3
			4233	846.6	24.4
		2	4132	826.4	23.9
			4183	836.6	23.0
			4233	846.6	24.0
		3	4132	826.4	23.9
			4183	836.6	24.0
			4233	846.6	23.9
		4	4132	826.4	23.9
			4183	836.6	23.9
			4233	846.6	23.8

9. PEAK TO AVERAGE RATIO


Test Procedure


Per KDB 971168 D01 Power Meas License Digital Systems v02r01

Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT

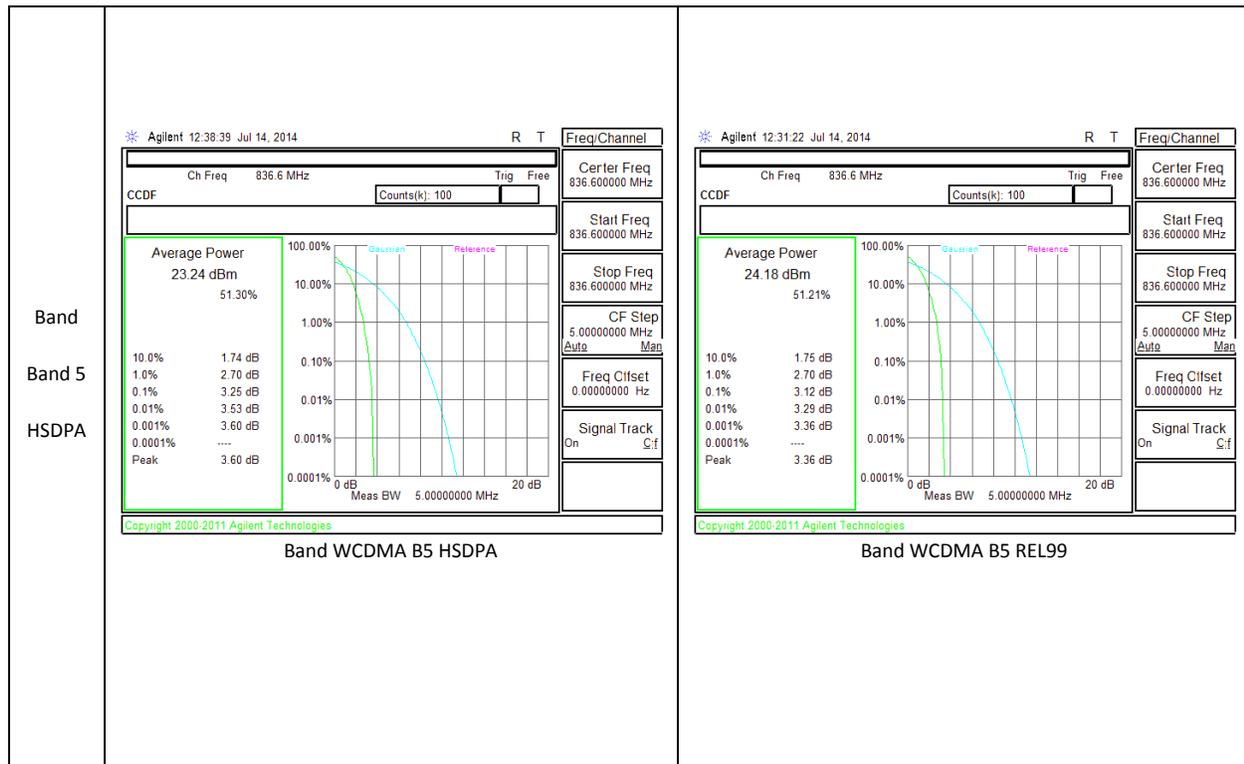

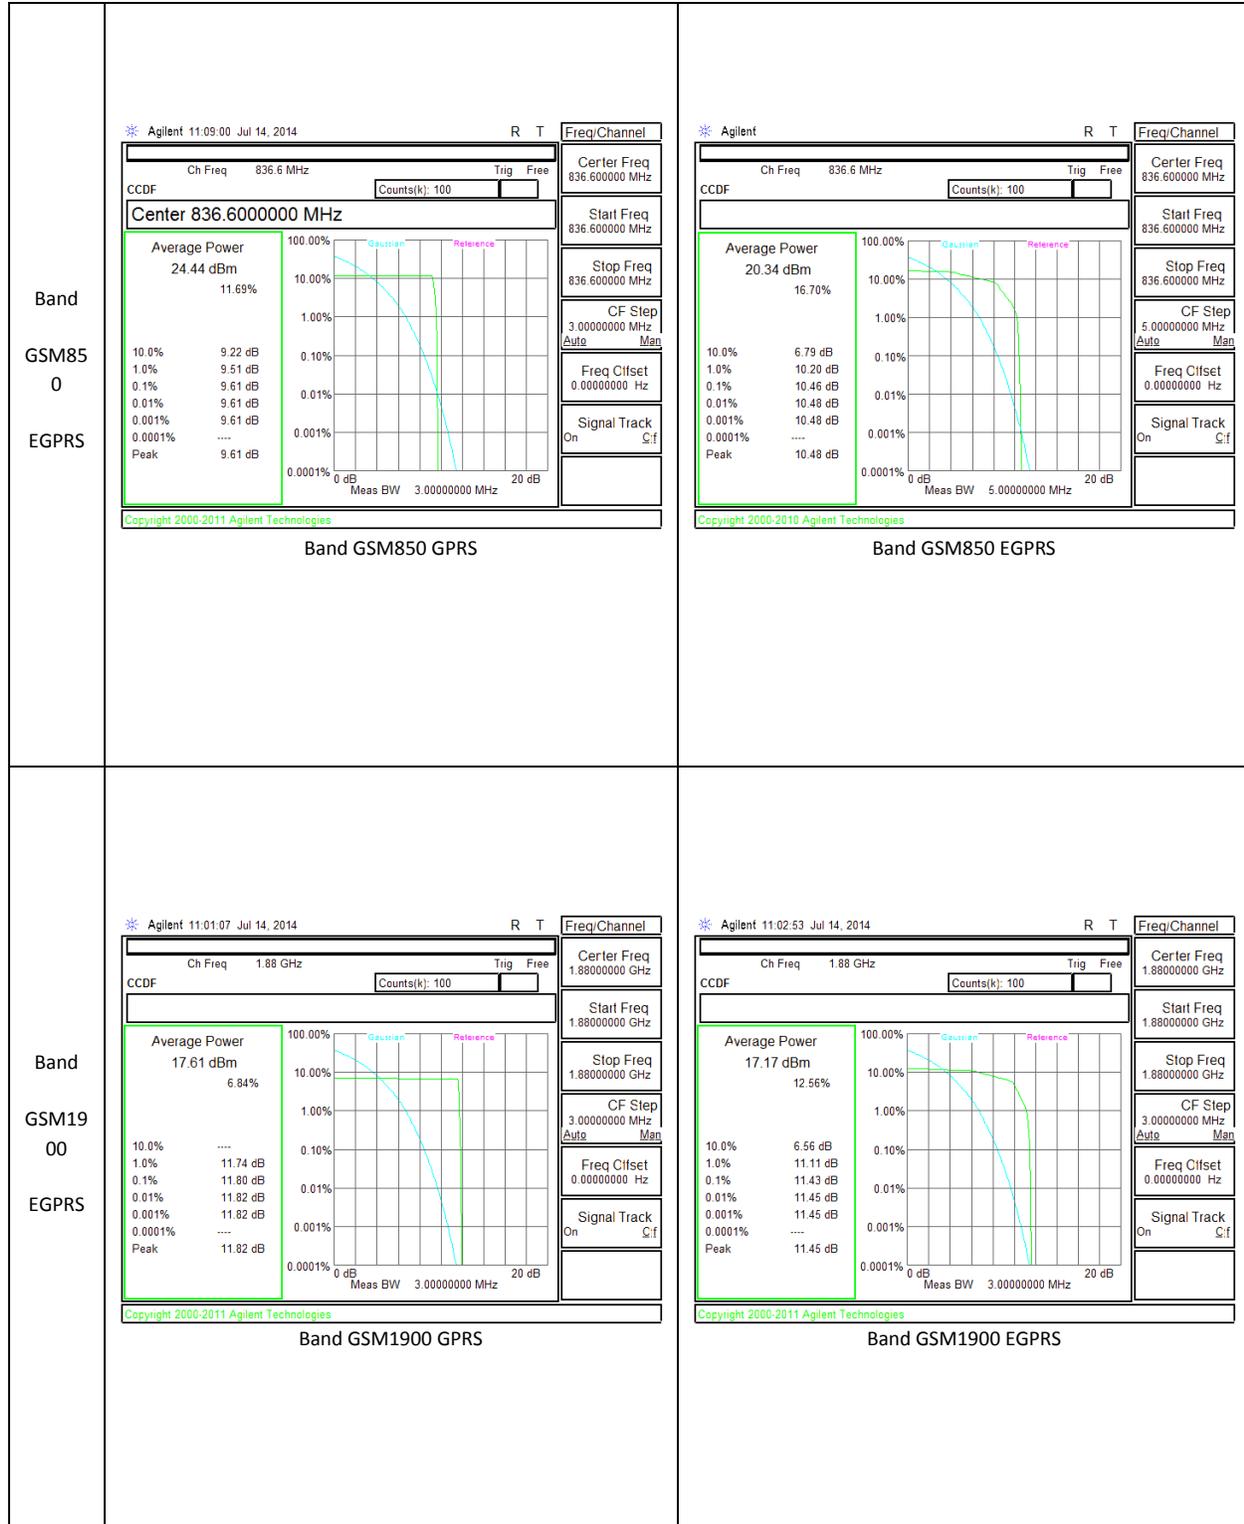

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r01 - 06/07/2013)

MODES TESTED


GSM850, GSM1900, WCDMA Band 5

10.1.1. OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GMSK	128	824.2		
		190	836.6		
		251	848.8		
	GPRS	128	824.2	258.47	325.29
		190	836.6	272.96	334.21
		251	848.8	252.33	324.65
	EGPRS	128	824.2	256.5	319.06
		190	836.6	249.3	317.95
		251	848.8	266.69	328.12
GSM1900	GMSK	512	1850.2		
		661	1880		
		810	1909.8		
	GPRS	512	1850.2	253.92	326.73
		661	1880	254.16	327.91
		810	1909.8	247.45	314.41
	EGPRS	512	1850.2	238.39	302.73
		661	1880	255.95	339.92
		810	1909.8	252.84	311.74
Band 5	REL99	4132	826.4	4.175	4.628
		4183	836.6	4.1809	4.665
		4233	846.6	4.1942	4.749
	HSDPA	4132	826.4	4.179	5.25
		4183	836.6	4.1906	4.631
		4233	846.6	4.1836	4.653
	HSUPA	4132	826.4		
		4183	836.6		
		4233	846.6		

10.1.2. OCCUPIED BANDWIDTH PLOTS

<p>Band GSM850 EGPRS</p>	<p>Agilent 11:17:50 Jul 14, 2014</p> <p>Ch Freq 836.6 MHz</p> <p>Center Freq 836.600000 MHz</p> <p>Occupied Bandwidth 272.9697 kHz</p> <p>Rel 32.5 dBm #Atten 30 dB</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Band GSM850 GPRS OBW Mid channel</p>	<p>Agilent 11:12:13 Jul 14, 2014</p> <p>Ch Freq 836.6 MHz</p> <p>Center Freq 836.600000 MHz</p> <p>Occupied Bandwidth 249.3085 kHz</p> <p>Rel 42.5 dBm #Atten 30 dB</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Band GSM850 EGPRS OBW Mid channel</p>
<p>Band GSM1900 EGPRS</p>	<p>Agilent 08:30:14 Jul 14, 2014</p> <p>Ch Freq 1.88 GHz</p> <p>Center Freq 1.88000000 GHz</p> <p>Occupied Bandwidth 254.1687 kHz</p> <p>Rel 32 dBm #Atten 30 dB</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Band GSM1900 GPRS OBW Mid channel</p>	<p>Agilent 08:56:07 Jul 14, 2014</p> <p>Ch Freq 1.88 GHz</p> <p>Center Freq 1.88000000 GHz</p> <p>Occupied Bandwidth 255.9537 kHz</p> <p>Rel 32 dBm #Atten 30 dB</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Band GSM1900 EGPRS OBW Mid channel</p>

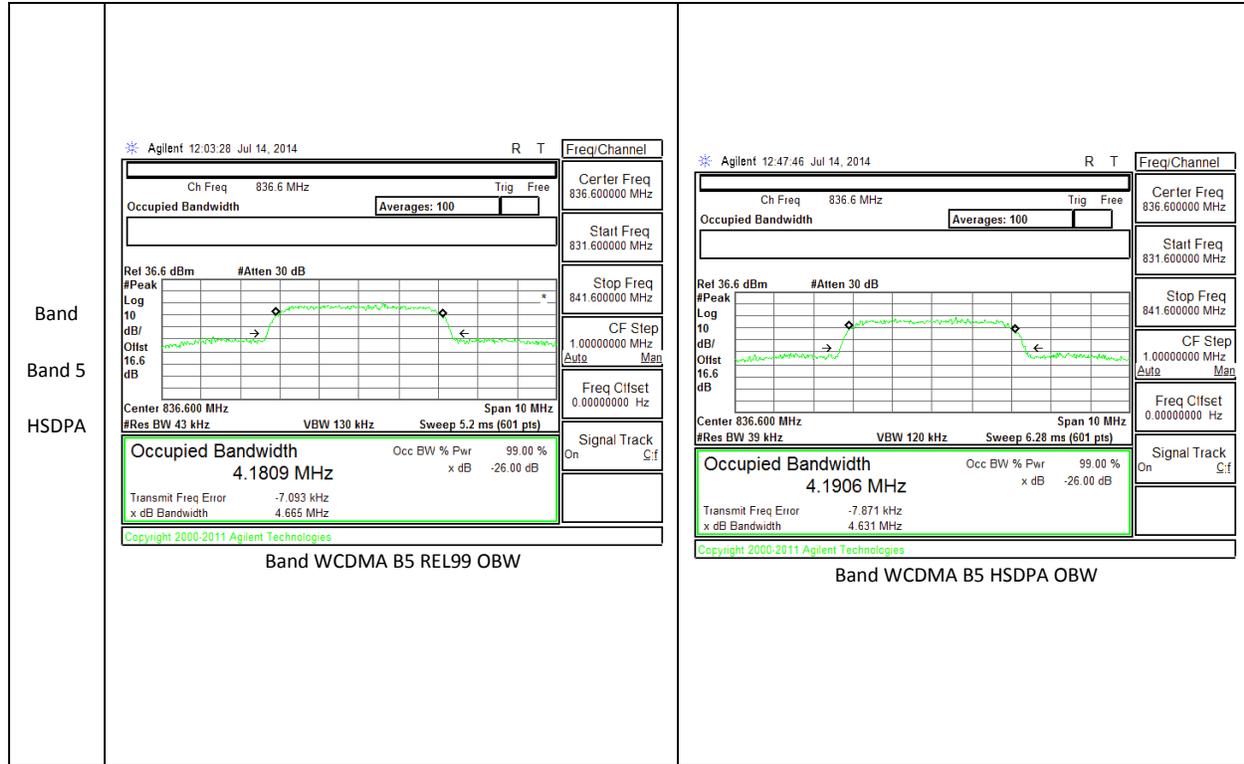

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238, §27

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.


TEST PROCEDURE


Per KDB 971168 D01 Power Meas License Digital Systems v02r01


The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

RESULTS

10.2.1. BAND EDGE PLOTS

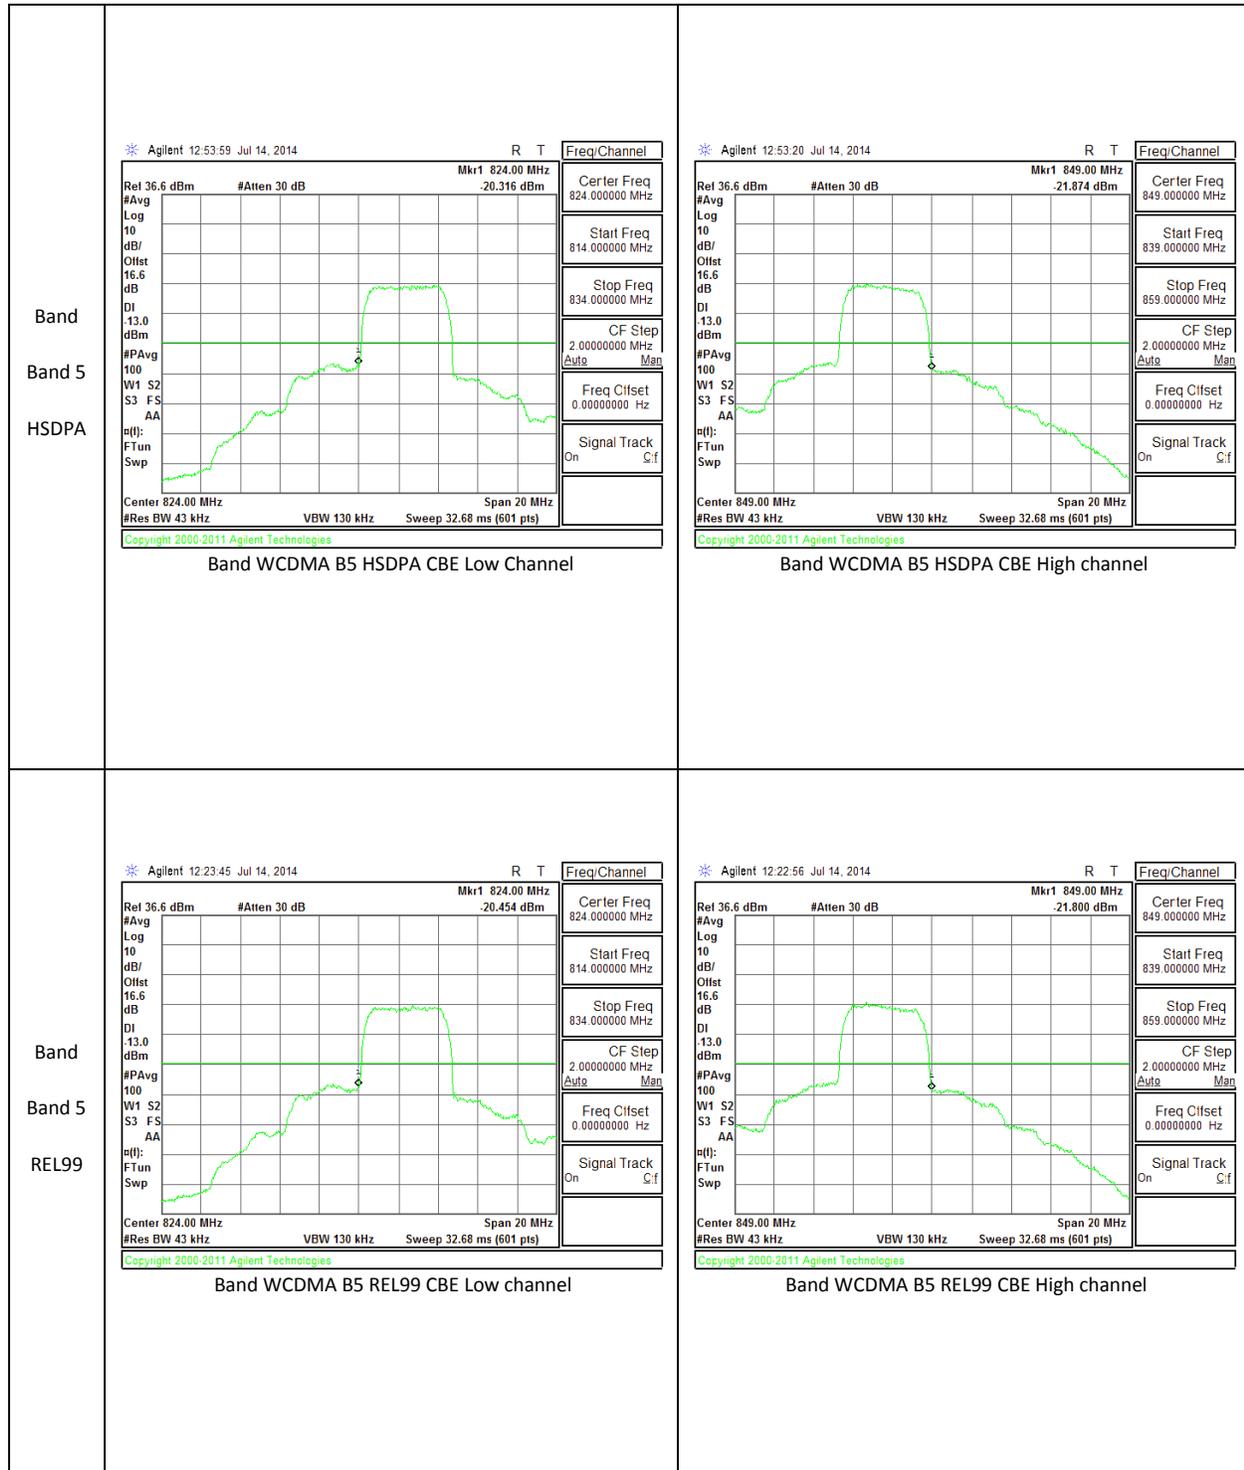

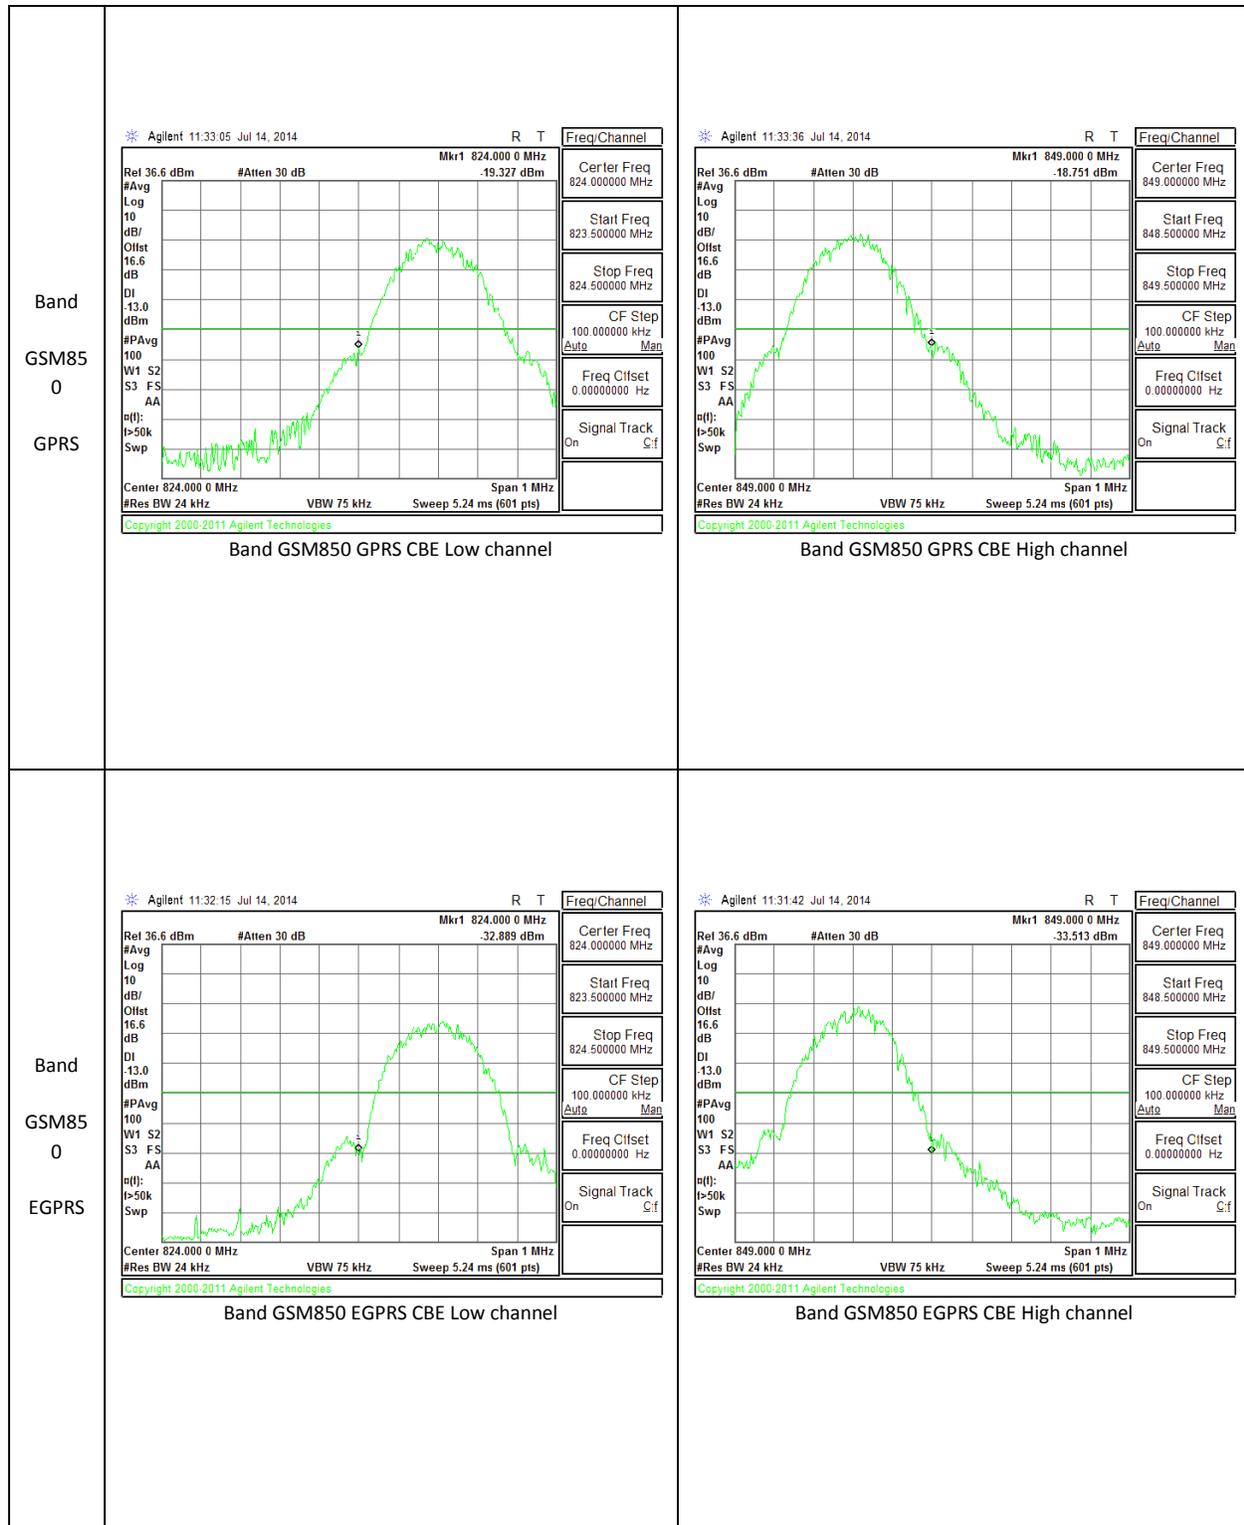

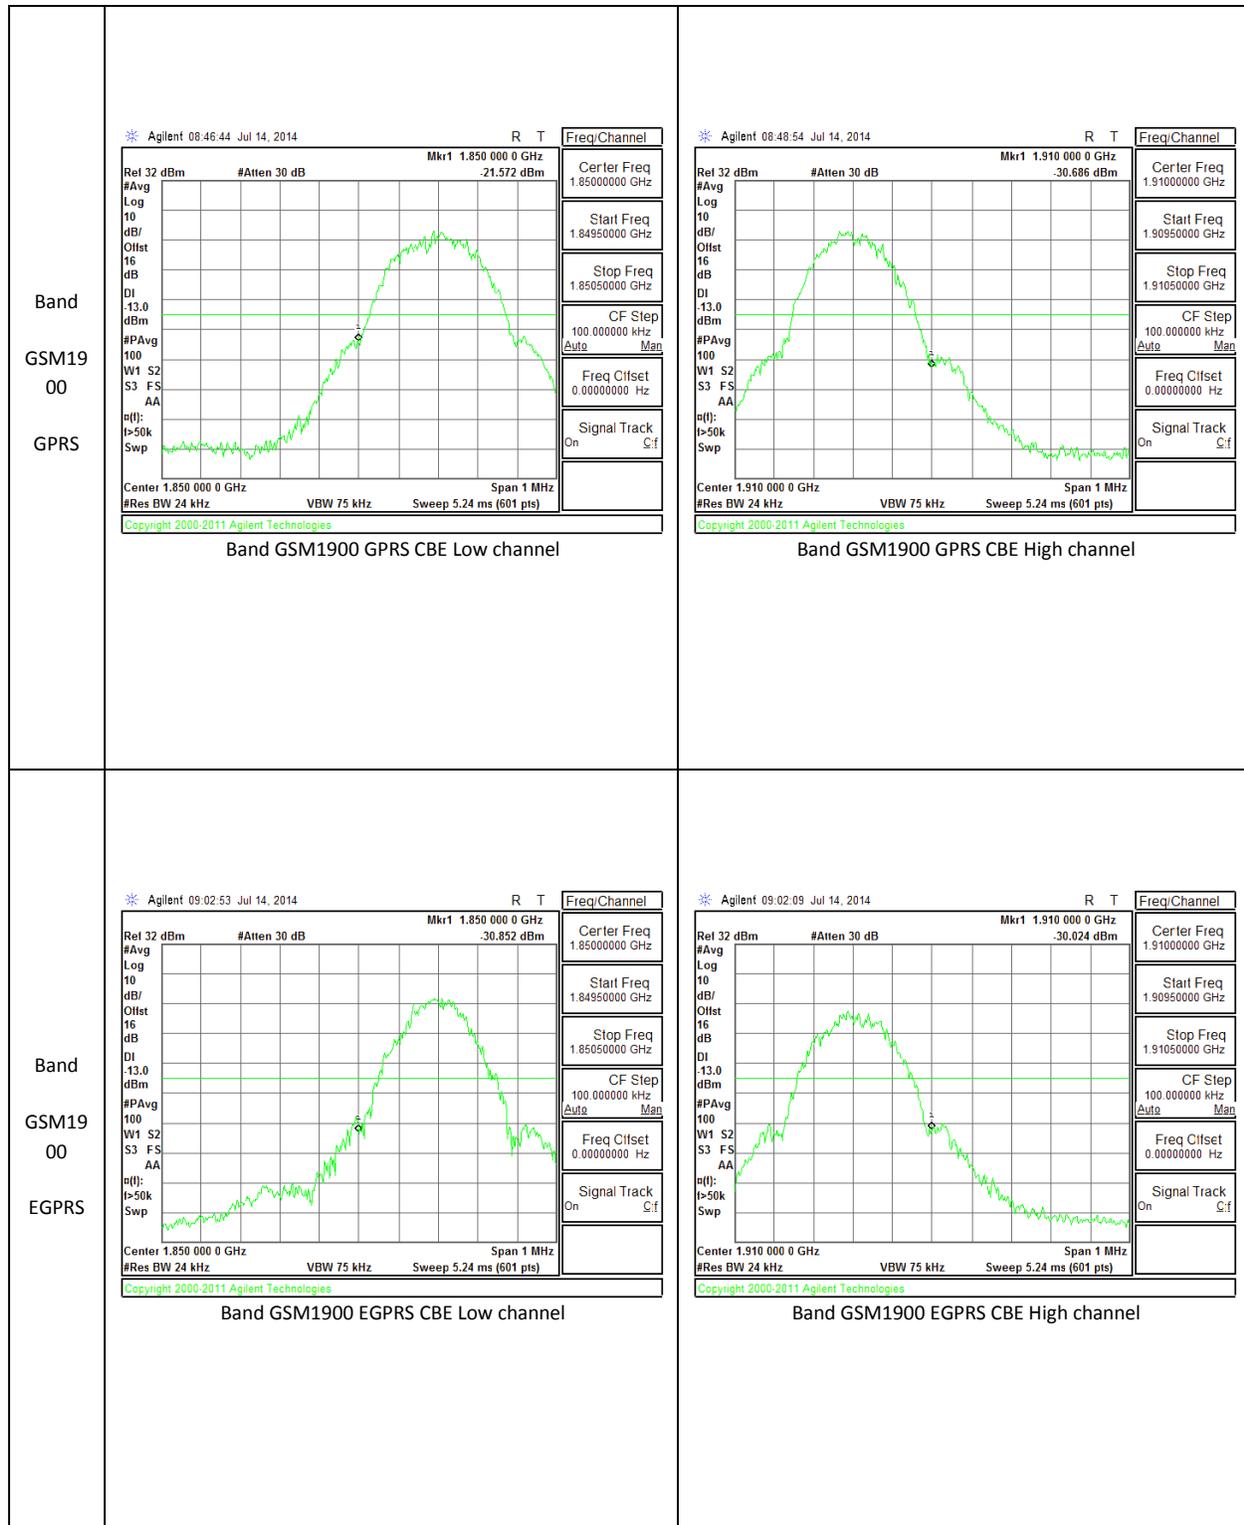

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, and §24.238.

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01


The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.


RESULTS

10.3.1. OUT OF BAND EMISSIONS RESULT

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM850	GMSK	824.2			
		836.6			
		848.8			
	GPRS	824.2	-28.73	-13	-15.73
		836.6	-26.05	-13	-13.05
		848.8	-27.62	-13	-14.62
	EGPRS	824.2	-28.61	-13	-15.61
		836.6	-23.71	-13	-10.71
		848.8	-29.58	-13	-16.58
GSM1900	GMSK	1850.2			
		1880			
		1909.8			
	GPRS	1850.2	-27.83	-13	-14.83
		1880	-29.27	-13	-16.27
		1909.8	-29.77	-13	-16.77
	EGPRS	1850.2	-28.4	-13	-15.4
		1880	-28.61	-13	-15.61
		1909.8	-30.17	-13	-17.17
WCDMA Band 5	REL99	826.4	-29.06	-13	-16.06
		836.6	-27.03	-13	-14.03
		846.6	-28.9	-13	-15.9
	HSDPA	826.4	-27.89	-13	-14.89
		836.6	-30.13	-13	-17.13
		846.6	-27.39	-13	-14.39

10.3.2. OUT OF BAND EMISSIONS PLOTS

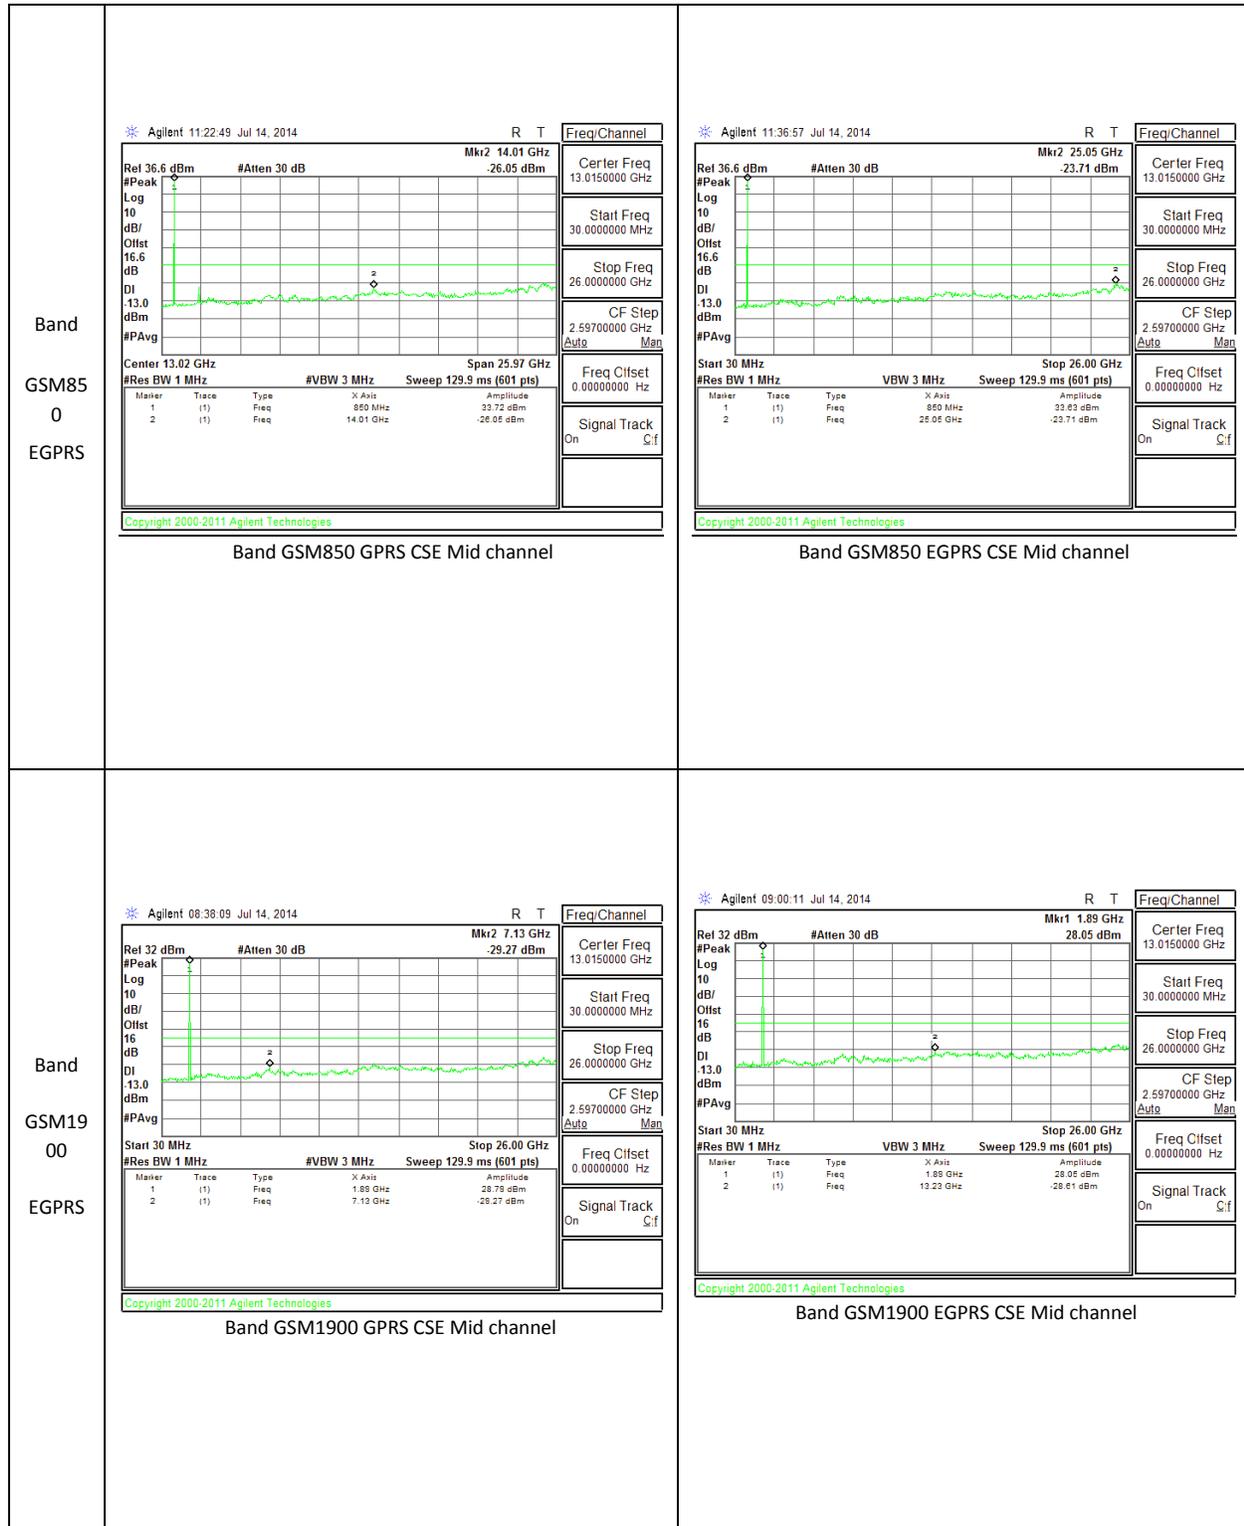

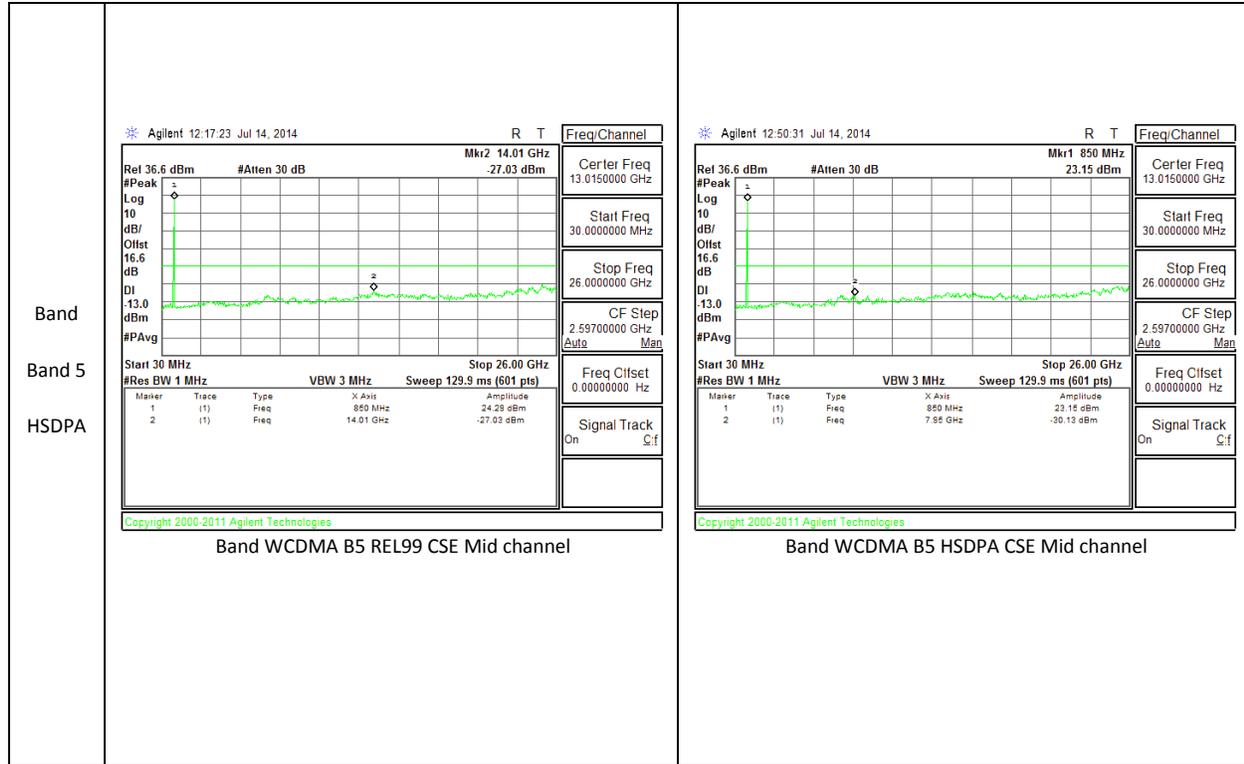

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, and §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

SOP

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until +50°C is reached. Reference power supply voltage for these tests is 3.8Vdc.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case). The test voltage ranges from 3.42 to 4.18 VDC.

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS

BAND V, Channel 4183, Freq: 836.6MHz – MID CHANNEL

Reference Frequency: Cell Mid Channel 836.6 MHz @ 20°C				
Limit: +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	50	836.600017	-0.033	2.5
3.70	40	836.599991	-0.001	2.5
3.70	30	836.599987	0.003	2.5
3.70	20	836.599990	0	2.5
3.70	10	836.599996	-0.007	2.5
3.70	0	836.600006	-0.020	2.5
3.70	-10	836.600009	-0.023	2.5
3.70	-20	836.599993	-0.004	2.5
3.70	-30	836.599994	-0.005	2.5

Reference Frequency: Mid Channel 836.6 MHz @ 20°C				
Limit: +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	20	836.599990	0.000	2.5
4.20	20	836.599992	-0.002	2.5
3.40	20	836.599991	-0.001	2.5

GSM1900, Channel 600 Freq: 1880MHz– MID CHANNEL

Reference Frequency: PC S Mid Channel 1880MHz @ 20°C				
Limit: to stay +- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	50	1880.000072	0.005	2.5
3.70	40	1880.000071	0.006	2.5
3.70	30	1880.000068	0.008	2.5
3.70	20	1880.000082	0	2.5
3.70	10	1880.000073	0.005	2.5
3.70	0	1880.000074	0.004	2.5
3.70	-10	1880.000074	0.004	2.5
3.70	-20	1880.000076	0.003	2.5
3.70	-30	1880.000073	0.005	2.5

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C				
Limit: to stay +- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.70	20	1880.000082	0	2.5
4.20	20	1880.000074	0.004	2.5
3.40	20	1880.000079	0.002	2.5

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17

TEST RESULTS

11.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 5	REL99	4132	826.4	18.231	66.54
		4183	836.6	19.701	93.35
		4233	846.6	20.721	118.06
	HSDPA	4132	826.4	19.28	84.72
		4183	836.6	18.95	78.52
		4233	846.6	20.35	108.39

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM1900	GPRS	512	1850.2	28.75	749.89
		661	1880	28.68	737.9
		810	1909.8	29.05	803.53
	EGPRS	512	1850.2	27.83	606.74
		661	1880	27.54	567.54
		810	1909.8	27.5	562.34

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GPRS	128	824.2	28.351	684.07
		190	836.6	30.131	1030.62
		251	848.8	30.891	1227.72
	EGPRS	128	824.2	25.631	365.68
		190	836.6	26.921	492.15
		251	848.8	28.001	631.1

Band GSM19 00 EGPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		Sony						
	Project #:		14U17919						
	Date:		07/22/14						
	Test Engineer:		S. Her, K. Ros, B. Liu						
	Configuration:		EUT only Y position						
	Mode:		EGPRS 1900MHz						
	Test Equipment:								
	Receiving: Horn T119, and Chamber C SMA Cables								
	Substitution: Horn T72 Substitution, 4ft SMA Cable Warehouse								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)	
	Low Ch								
	1850.20	20.78	V	0.85	7.9	27.83	33.0	-5.2	
	1850.20	8.54	H	0.85	7.9	15.59	33.0	-17.4	
	Mid Ch								
	1880.00	20.49	V	0.85	7.9	27.54	33.0	-5.5	
	1880.00	15.31	H	0.85	7.9	22.36	33.0	-10.6	
	High Ch								
	1909.80	20.45	V	0.85	7.9	27.50	33.0	-5.5	
	1909.80	10.30	H	0.85	7.9	17.35	33.0	-15.7	
	Rev. 3.17.11								
	Note: For Band 4 EIRP limit is 30dBm								

Band GSM85 0 EGPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C																																																																																																
	Company:		Sony																																																																																														
	Project #:		14U17919																																																																																														
	Date:		07/22/14																																																																																														
	Test Engineer:		S. Her, K. Ros, B. Liu																																																																																														
	Configuration:		EUT only Y position																																																																																														
	Mode:		EGPRS 850MHz																																																																																														
	Test Equipment:																																																																																																
	Receiving: Sunol T185, and 3m Chamber N-type Cable (Setup this one for testing EUT)																																																																																																
	Substitution: Dipole S/N: 00022117, 5ft SMA Cable (SN # 16795) Warehouse.																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>824.20</td> <td>16.1</td> <td>V</td> <td>0.5</td> <td>0.0</td> <td>15.58</td> <td>38.5</td> <td>-22.9</td> <td></td> </tr> <tr> <td>824.20</td> <td>26.1</td> <td>H</td> <td>0.5</td> <td>0.0</td> <td>25.63</td> <td>38.5</td> <td>-12.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.60</td> <td>16.4</td> <td>V</td> <td>0.5</td> <td>0.0</td> <td>15.88</td> <td>38.5</td> <td>-22.6</td> <td></td> </tr> <tr> <td>836.60</td> <td>27.4</td> <td>H</td> <td>0.5</td> <td>0.0</td> <td>26.92</td> <td>38.5</td> <td>-11.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>848.80</td> <td>17.9</td> <td>V</td> <td>0.5</td> <td>0.0</td> <td>17.38</td> <td>38.5</td> <td>-21.1</td> <td></td> </tr> <tr> <td>848.80</td> <td>28.5</td> <td>H</td> <td>0.5</td> <td>0.0</td> <td>28.00</td> <td>38.5</td> <td>-10.4</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									824.20	16.1	V	0.5	0.0	15.58	38.5	-22.9		824.20	26.1	H	0.5	0.0	25.63	38.5	-12.8		Mid Ch									836.60	16.4	V	0.5	0.0	15.88	38.5	-22.6		836.60	27.4	H	0.5	0.0	26.92	38.5	-11.5		High Ch									848.80	17.9	V	0.5	0.0	17.38	38.5	-21.1		848.80	28.5	H	0.5	0.0	28.00	38.5	-10.4	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																									
Low Ch																																																																																																	
824.20	16.1	V	0.5	0.0	15.58	38.5	-22.9																																																																																										
824.20	26.1	H	0.5	0.0	25.63	38.5	-12.8																																																																																										
Mid Ch																																																																																																	
836.60	16.4	V	0.5	0.0	15.88	38.5	-22.6																																																																																										
836.60	27.4	H	0.5	0.0	26.92	38.5	-11.5																																																																																										
High Ch																																																																																																	
848.80	17.9	V	0.5	0.0	17.38	38.5	-21.1																																																																																										
848.80	28.5	H	0.5	0.0	28.00	38.5	-10.4																																																																																										
Rev. 3.17.11																																																																																																	
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																	

Band GSM85 0 GPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C																																																																																																
	Company:		Sony																																																																																														
	Project #:		14U17919																																																																																														
	Date:		07/22/14																																																																																														
	Test Engineer:		S. Her, K. Ros, B. Liu																																																																																														
	Configuration:		EUT only Y position																																																																																														
	Mode:		GPRS 850MHz																																																																																														
	Test Equipment:																																																																																																
	Receiving: Sunol T185, and 3m Chamber N-type Cable (Setup this one for testing EUT)																																																																																																
	Substitution: Dipole S/N: 00022117, 5ft SMA Cable (SN # 16795) Warehouse.																																																																																																
<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>824.20</td> <td>17.48</td> <td>V</td> <td>0.5</td> <td>0.0</td> <td>16.98</td> <td>38.5</td> <td>-21.5</td> <td></td> </tr> <tr> <td>824.20</td> <td>28.85</td> <td>H</td> <td>0.5</td> <td>0.0</td> <td>28.35</td> <td>38.5</td> <td>-10.1</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.60</td> <td>18.32</td> <td>V</td> <td>0.5</td> <td>0.0</td> <td>17.82</td> <td>38.5</td> <td>-20.6</td> <td></td> </tr> <tr> <td>836.60</td> <td>30.63</td> <td>H</td> <td>0.5</td> <td>0.0</td> <td>30.13</td> <td>38.5</td> <td>-8.3</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>848.80</td> <td>19.48</td> <td>V</td> <td>0.5</td> <td>0.0</td> <td>18.98</td> <td>38.5</td> <td>-19.5</td> <td></td> </tr> <tr> <td>848.80</td> <td>31.39</td> <td>H</td> <td>0.5</td> <td>0.0</td> <td>30.89</td> <td>38.5</td> <td>-7.6</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									824.20	17.48	V	0.5	0.0	16.98	38.5	-21.5		824.20	28.85	H	0.5	0.0	28.35	38.5	-10.1		Mid Ch									836.60	18.32	V	0.5	0.0	17.82	38.5	-20.6		836.60	30.63	H	0.5	0.0	30.13	38.5	-8.3		High Ch									848.80	19.48	V	0.5	0.0	18.98	38.5	-19.5		848.80	31.39	H	0.5	0.0	30.89	38.5	-7.6	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																									
Low Ch																																																																																																	
824.20	17.48	V	0.5	0.0	16.98	38.5	-21.5																																																																																										
824.20	28.85	H	0.5	0.0	28.35	38.5	-10.1																																																																																										
Mid Ch																																																																																																	
836.60	18.32	V	0.5	0.0	17.82	38.5	-20.6																																																																																										
836.60	30.63	H	0.5	0.0	30.13	38.5	-8.3																																																																																										
High Ch																																																																																																	
848.80	19.48	V	0.5	0.0	18.98	38.5	-19.5																																																																																										
848.80	31.39	H	0.5	0.0	30.89	38.5	-7.6																																																																																										
Rev. 3.17.11																																																																																																	
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm																																																																																																	

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238

LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RESULTS

11.2.1. SPURIOUS RADIATION DATA

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company:		Sony							
Project #:		14U17919							
Date:		07/22/14							
Test Engineer:		S. Her, K. Ros, B. Liu							
Configuration:		EUT only Y position							
Mode:		WCDMA_HSDPA_B5_HARM							
Chamber		Pre-amplifier		Filter		Limit			
3m Chamber		T34 8449B		Filter 1		Part 22			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band 5									
HSDPA									
Low Ch, 824.2MHz									
1.648	-19.9	V	3.0	37.4	1.0	-56.3	-13.0	-43.3	
2.473	-14.3	V	3.0	36.4	1.0	-49.6	-13.0	-36.6	
3.297	-11.2	V	3.0	35.8	1.0	-46.0	-13.0	-33.0	
1.648	-20.8	H	3.0	37.4	1.0	-57.2	-13.0	-44.2	
2.473	-15.8	H	3.0	36.4	1.0	-51.1	-13.0	-38.1	
3.297	-11.6	H	3.0	35.8	1.0	-46.4	-13.0	-33.4	
Mid Ch, 836.6MHz									
1.673	-20.3	V	3.0	37.3	1.0	-56.6	-13.0	-43.6	
2.510	-13.8	V	3.0	36.4	1.0	-49.2	-13.0	-36.2	
3.346	-11.4	V	3.0	35.8	1.0	-46.1	-13.0	-33.1	
1.673	-20.6	H	3.0	37.3	1.0	-56.9	-13.0	-43.9	
2.510	-15.9	H	3.0	36.4	1.0	-51.2	-13.0	-38.2	
3.346	-11.4	H	3.0	35.8	1.0	-46.2	-13.0	-33.2	
High Ch, 848.8MHz									
1.698	-20.0	V	3.0	37.3	1.0	-56.3	-13.0	-43.3	
2.547	-14.4	V	3.0	36.3	1.0	-49.7	-13.0	-36.7	
3.395	-11.6	V	3.0	35.7	1.0	-46.3	-13.0	-33.3	
1.698	-20.4	H	3.0	37.3	1.0	-56.7	-13.0	-43.7	
2.547	-16.2	H	3.0	36.3	1.0	-51.6	-13.0	-38.6	
3.395	-12.0	H	3.0	35.7	1.0	-46.7	-13.0	-33.7	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company:		Sony							
Project #:		14U17919							
Date:		07/22/14							
Test Engineer:		S. Her, K. Ros, B. Liu							
Configuration:		EUT only Y position							
Mode:		WCDMA_REL 99_B5_HARM							
Chamber		Pre-amplifier			Filter		Limit		
3m Chamber		T34 8449B			Filter 1		Part 22		
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band 5									
REL99									
Low Ch, 824.2MHz									
1.648	-20.1	V	3.0	37.4	1.0	-56.5	-13.0	-43.5	
2.473	-14.4	V	3.0	36.4	1.0	-49.8	-13.0	-36.8	
3.297	-11.4	V	3.0	35.8	1.0	-46.2	-13.0	-33.2	
1.648	-20.6	H	3.0	37.4	1.0	-57.0	-13.0	-44.0	
2.473	-15.7	H	3.0	36.4	1.0	-51.1	-13.0	-38.1	
3.297	-11.4	H	3.0	35.8	1.0	-46.2	-13.0	-33.2	
Mid Ch, 836.6MHz									
1.673	-20.4	V	3.0	37.3	1.0	-56.7	-13.0	-43.7	
2.510	-14.4	V	3.0	36.4	1.0	-49.8	-13.0	-36.8	
3.346	-11.8	V	3.0	35.8	1.0	-46.6	-13.0	-33.6	
1.673	-20.3	H	3.0	37.3	1.0	-56.6	-13.0	-43.6	
2.510	-16.2	H	3.0	36.4	1.0	-51.5	-13.0	-38.5	
3.346	-11.7	H	3.0	35.8	1.0	-46.4	-13.0	-33.4	
High Ch, 848.8MHz									
1.698	-20.0	V	3.0	37.3	1.0	-56.3	-13.0	-43.3	
2.547	-14.8	V	3.0	36.3	1.0	-50.2	-13.0	-37.2	
3.395	-11.7	V	3.0	35.7	1.0	-46.4	-13.0	-33.4	
1.698	-20.5	H	3.0	37.3	1.0	-56.8	-13.0	-43.8	
2.547	-16.1	H	3.0	36.3	1.0	-51.4	-13.0	-38.4	
3.395	-12.1	H	3.0	35.7	1.0	-46.8	-13.0	-33.8	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		Sony								
Project #:		14U17919								
Date:		07/22/14								
Test Engineer:		S. Her, K. Ros, B. Liu								
Configuration:		EUT w/ HS + AC adaptor Y position								
Mode:		GPRS1900 HARM								
Chamber		Pre-amplifier			Filter		Limit			
3m Chamber		T34 8449B			Filter 1		Part 24			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM1900	Low Ch, 1850.2MHz									
	3.700	5.2	V	3.0	35.4	1.0	-29.2	-13.0	-16.2	
	5.551	8.2	V	3.0	34.7	1.0	-25.5	-13.0	-12.5	
	7.370	13.9	V	3.0	34.9	1.0	-20.0	-13.0	-7.0	
	3.700	4.7	H	3.0	35.4	1.0	-29.7	-13.0	-16.7	
	5.551	8.6	H	3.0	34.7	1.0	-25.2	-13.0	-12.2	
	7.370	15.5	H	3.0	34.9	1.0	-18.4	-13.0	-5.4	
	Mid Ch, 1880.0MHz									
	3.759	5.6	V	3.0	35.3	1.0	-28.7	-13.0	-15.7	
5.640	8.2	V	3.0	34.7	1.0	-25.5	-13.0	-12.5		
7.520	13.9	V	3.0	34.9	1.0	-20.0	-13.0	-7.0		
3.759	4.4	H	3.0	35.3	1.0	-30.0	-13.0	-17.0		
5.640	8.5	H	3.0	34.7	1.0	-25.2	-13.0	-12.2		
7.520	14.8	H	3.0	34.9	1.0	-19.2	-13.0	-6.2		
GPRS	High Ch, 1909.8MHz									
	3.820	4.3	V	3.0	35.3	1.0	-30.0	-13.0	-17.0	
	5.729	9.2	V	3.0	34.7	1.0	-24.5	-13.0	-11.5	
	7.663	14.7	V	3.0	35.0	1.0	-19.2	-13.0	-6.2	
	3.820	4.6	H	3.0	35.3	1.0	-29.7	-13.0	-16.7	
	5.729	8.9	H	3.0	34.7	1.0	-24.9	-13.0	-11.9	
7.663	15.3	H	3.0	35.0	1.0	-18.7	-13.0	-5.7		
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company:		Sony							
Project #:		14U17919							
Date:		07/22/14							
Test Engineer:		S. Her, K. Ros, B. Liu							
Configuration:		EUT w/ HS + AC adaptor Y position							
Mode:		EGPRS1900 HARM							
Chamber		Pre-amplifier			Filter		Limit		
3m Chamber		T34 8449B			Filter 1		Part 22		
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band									
GSM									
1900									
EGPRS									
Low Ch, 1850.2MHz									
3.700	5.2	V	3.0	35.4	1.0	-29.2	-13.0	-16.2	
5.551	7.8	V	3.0	34.7	1.0	-26.0	-13.0	-13.0	
7.370	14.1	V	3.0	34.9	1.0	-19.8	-13.0	-6.8	
3.700	4.2	H	3.0	35.4	1.0	-30.2	-13.0	-17.2	
5.551	7.9	H	3.0	34.7	1.0	-25.8	-13.0	-12.8	
7.370	14.4	H	3.0	34.9	1.0	-19.5	-13.0	-6.5	
Mid Ch, 1880.0MHz									
3.759	4.5	V	3.0	35.3	1.0	-29.9	-13.0	-16.9	
5.640	7.8	V	3.0	34.7	1.0	-25.9	-13.0	-12.9	
7.520	14.3	V	3.0	34.9	1.0	-19.7	-13.0	-6.7	
3.759	5.1	H	3.0	35.3	1.0	-29.2	-13.0	-16.2	
5.640	9.3	H	3.0	34.7	1.0	-24.4	-13.0	-11.4	
7.520	14.3	H	3.0	34.9	1.0	-19.6	-13.0	-6.6	
High Ch, 1909.8MHz									
3.820	5.2	V	3.0	35.3	1.0	-29.1	-13.0	-16.1	
5.729	8.4	V	3.0	34.7	1.0	-25.4	-13.0	-12.4	
7.663	14.6	V	3.0	35.0	1.0	-19.4	-13.0	-6.4	
3.820	4.3	H	3.0	35.3	1.0	-30.0	-13.0	-17.0	
5.729	9.5	H	3.0	34.7	1.0	-24.3	-13.0	-11.3	
7.663	16.8	H	3.0	35.0	1.0	-17.2	-13.0	-4.2	
Rev. 03.03.09									
Note: No other emissions were detected above the system noise floor.									

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		Sony								
Project #:		14U17919								
Date:		07/22/14								
Test Engineer:		K. Ros, B. Liu, S. Her								
Configuration:		EUT w/ HS + AC adaptor Y position								
Mode:		EGPRS850 HARM								
Chamber		Pre-amplifier			Filter			Limit		
3m Chamber		T34 8449B			Filter 1			Part 24		
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 824.2MHz									
GSM	1.648	-21.0	V	3.0	37.4	1.0	-57.3	-13.0	-44.3	
850	2.473	-14.8	V	3.0	36.4	1.0	-50.2	-13.0	-37.2	
	3.297	-11.6	V	3.0	35.8	1.0	-46.4	-13.0	-33.4	
EGPRS	1.648	-21.2	H	3.0	37.4	1.0	-57.5	-13.0	-44.5	
	2.473	-16.2	H	3.0	36.4	1.0	-51.6	-13.0	-38.6	
	3.297	-11.8	H	3.0	35.8	1.0	-46.6	-13.0	-33.6	
	Mid Ch, 836.6MHz									
	1.673	-19.8	V	3.0	37.3	1.0	-56.1	-13.0	-43.1	
	2.510	-14.5	V	3.0	36.4	1.0	-49.9	-13.0	-36.9	
	3.346	-11.7	V	3.0	35.8	1.0	-46.4	-13.0	-33.4	
	1.673	-20.9	H	3.0	37.3	1.0	-57.2	-13.0	-44.2	
	2.510	-16.1	H	3.0	36.4	1.0	-51.4	-13.0	-38.4	
	3.346	-11.8	H	3.0	35.8	1.0	-46.5	-13.0	-33.5	
	High Ch, 848.8MHz									
	1.698	-20.2	V	3.0	37.3	1.0	-56.5	-13.0	-43.5	
	2.547	-14.0	V	3.0	36.3	1.0	-49.3	-13.0	-36.3	
	3.395	-11.0	V	3.0	35.7	1.0	-45.7	-13.0	-32.7	
	1.698	-20.2	H	3.0	37.3	1.0	-56.5	-13.0	-43.5	
	2.547	-16.1	H	3.0	36.3	1.0	-51.5	-13.0	-38.5	
	3.395	-11.8	H	3.0	35.7	1.0	-46.5	-13.0	-33.5	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:		Sony								
Project #:		14U17919								
Date:		07/22/14								
Test Engineer:		K. Ros, B. Liu, S. Her								
Configuration:		EUT w/ HS + AC adaptor Y position								
Mode:		GPRS850 HARM								
Chamber		Pre-amplifier			Filter		Limit			
3m Chamber		T34 8449B			Filter 1		Part 24			
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 824.2MHz									
GSM	1.648	-20.8	V	3.0	37.4	1.0	-57.2	-13.0	-44.2	
	2.473	-14.6	V	3.0	36.4	1.0	-50.0	-13.0	-37.0	
	3.297	-11.5	V	3.0	35.8	1.0	-46.3	-13.0	-33.3	
850	1.648	-21.0	H	3.0	37.4	1.0	-57.4	-13.0	-44.4	
	2.473	-16.1	H	3.0	36.4	1.0	-51.5	-13.0	-38.5	
	3.297	-11.3	H	3.0	35.8	1.0	-46.1	-13.0	-33.1	
GPRS	Mid Ch, 836.6MHz									
	1.673	-20.5	V	3.0	37.3	1.0	-56.8	-13.0	-43.8	
	2.510	-14.8	V	3.0	36.4	1.0	-50.2	-13.0	-37.2	
	3.346	-11.4	V	3.0	35.8	1.0	-46.2	-13.0	-33.2	
	1.673	-20.0	H	3.0	37.3	1.0	-56.4	-13.0	-43.4	
	2.510	-15.9	H	3.0	36.4	1.0	-51.2	-13.0	-38.2	
	3.346	-11.7	H	3.0	35.8	1.0	-46.5	-13.0	-33.5	
	High Ch, 848.8MHz									
	1.698	-20.5	V	3.0	37.3	1.0	-56.8	-13.0	-43.8	
	2.547	-14.6	V	3.0	36.3	1.0	-49.9	-13.0	-36.9	
	3.395	-11.7	V	3.0	35.7	1.0	-46.4	-13.0	-33.4	
	1.698	-20.3	H	3.0	37.3	1.0	-56.6	-13.0	-43.6	
	2.547	-15.6	H	3.0	36.3	1.0	-51.0	-13.0	-38.0	
	3.395	-12.1	H	3.0	35.7	1.0	-46.8	-13.0	-33.8	
Rev. 03.03.09										
Note: No other emissions were detected above the system noise floor.										