

## TEST REPORT

Test Report No.: 1-4254/12-74-02-A



### Testing Laboratory

**CETECOM ICT Services GmbH**

Untertürkheimer Straße 6 – 10  
66117 Saarbrücken/Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <http://www.cetecom.com>  
e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)

**Accredited Test Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

### Applicant

**Sony Mobile Communications AB**

Nya Vattentornet  
22188 Lund/SWEDEN

Phone: +46 46 19 30 00

Contact: Håkan Sjöberg  
e-mail: [hakan.sjoberg@sonymobile.com](mailto:hakan.sjoberg@sonymobile.com)  
Phone: +46 46 19 35 59  
Fax: +46 46 19 32 95

### Manufacturer

**Sony Mobile Communications AB**

Nya Vattentornet  
22188 Lund/SWEDEN

### Test Standard/s

|                              |                                                                                                                                                                             |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IEEE 1528-2003               | Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques |
| OET Bulletin 65 Supplement C | Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields                                                                       |
| RSS-102 Issue 4              | Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)                                                                                   |

For further applied test standards please refer to section 3 of this test report.

### Test Item

|                     |                                               |
|---------------------|-----------------------------------------------|
| Kind of test item:  | Tablet PC                                     |
| Device type:        | portable device                               |
| <b>Model name:</b>  | <b>TM-0000-BV</b>                             |
| S/N serial number:  | CB5A1MD9BW / CB5A1MD9BH                       |
| FCC-ID:             | PY7 TM-0000                                   |
| IC:                 | 4170B-TM0000                                  |
| IMEI-Number:        | 004402540209446                               |
| Hardware status:    | AP                                            |
| Software status:    | 10.1.E.0.61                                   |
| Frequency:          | see technical details                         |
| Antenna:            | integrated antenna                            |
| Battery option:     | Integrated battery                            |
| Accessories:        | Stereo headset MH-EX300AP SN: 1238SSP00000735 |
| Test sample status: | identical prototype                           |
| Exposure category:  | general population / uncontrolled environment |

**Test Report authorised:**

2013-02-15 Thomas Vogler  
Senior Testing Manager

**Test performed:**

2013-02-15 Oleksandr Hnatovskiy  
Testing Manager

## 1 Table of contents

|        |                                                                       |    |
|--------|-----------------------------------------------------------------------|----|
| 1      | Table of contents.....                                                | 2  |
| 2      | General information .....                                             | 4  |
| 2.1    | Notes and disclaimer .....                                            | 4  |
| 2.2    | Application details .....                                             | 4  |
| 2.3    | Statement of compliance .....                                         | 4  |
| 2.4    | Technical details.....                                                | 5  |
| 2.5    | Transmitter and Antenna Operating Configurations .....                | 6  |
| 3      | Test standards/ procedures references .....                           | 7  |
| 3.1    | RF exposure limits .....                                              | 8  |
| 4      | Summary of Measurement Results .....                                  | 9  |
| 4.1    | SAR measurement variability and measurement uncertainty analysis..... | 9  |
| 5      | Test Environment .....                                                | 9  |
| 6      | Test Set-up.....                                                      | 10 |
| 6.1    | Measurement system.....                                               | 10 |
| 6.1.1  | System Description.....                                               | 10 |
| 6.1.2  | Test environment.....                                                 | 11 |
| 6.1.3  | Probe description.....                                                | 11 |
| 6.1.4  | Phantom description.....                                              | 12 |
| 6.1.5  | Device holder description .....                                       | 12 |
| 6.1.6  | Laptop Extension Kit for Device holder .....                          | 12 |
| 6.1.7  | Scanning procedure .....                                              | 13 |
| 6.1.8  | Spatial Peak SAR Evaluation .....                                     | 14 |
| 6.1.9  | Data Storage and Evaluation.....                                      | 15 |
| 6.1.10 | Tissue simulating liquids: dielectric properties .....                | 17 |
| 6.1.11 | Tissue simulating liquids: parameters .....                           | 18 |
| 6.1.12 | Measurement uncertainty evaluation for SAR test.....                  | 19 |
| 6.1.13 | Measurement uncertainty evaluation for System Check.....              | 22 |
| 6.1.14 | System check .....                                                    | 24 |
| 6.1.15 | System check procedure .....                                          | 25 |
| 7      | Detailed Test Results .....                                           | 26 |
| 7.1    | G Sensor controlled power back off .....                              | 26 |
| 7.1.1  | Description.....                                                      | 26 |
| 7.1.2  | Verification.....                                                     | 26 |
| 7.2    | Conducted power measurements.....                                     | 27 |
| 7.2.1  | Conducted power measurements GSM 850 MHz.....                         | 28 |
| 7.2.2  | Conducted power measurements GSM 1900 MHz.....                        | 29 |
| 7.2.3  | Justification of SAR measurements in GSM mode .....                   | 29 |
| 7.2.4  | Conducted power measurements UMTS FDD V (850 MHz) .....               | 30 |
| 7.2.5  | Test-set-up information for WCDMA / HSPDA / HSUPA .....               | 31 |
| 7.2.6  | Conducted power measurements WLAN 2.4 GHz.....                        | 35 |
| 7.2.7  | Conducted power measurements WLAN 5 GHz.....                          | 35 |
| 7.2.8  | Standalone SAR Test Exclusion .....                                   | 36 |
| 7.2.9  | Multiple Transmitter Information .....                                | 37 |
| 7.2.10 | SAR measurement positions .....                                       | 40 |
| 7.3    | SAR test results.....                                                 | 41 |
| 7.3.1  | Results overview .....                                                | 41 |
| 7.3.2  | General description of test procedures .....                          | 43 |
| 8      | Test equipment and ancillaries used for tests .....                   | 44 |

|                 |                                                                     |            |
|-----------------|---------------------------------------------------------------------|------------|
| <b>9</b>        | <b>Observations .....</b>                                           | <b>44</b>  |
| <b>Annex A:</b> | <b>System performance check .....</b>                               | <b>45</b>  |
| <b>Annex B:</b> | <b>DASY measurement results.....</b>                                | <b>52</b>  |
| Annex B.1:      | GSM 850MHz .....                                                    | 52         |
| Annex B.2:      | GSM 1900MHz .....                                                   | 65         |
| Annex B.3:      | UMTS FDD V 850MHz .....                                             | 74         |
| Annex B.4:      | WLAN 2450MHz .....                                                  | 83         |
| Annex B.5:      | WLAN 5GHz.....                                                      | 90         |
| Annex B.6:      | Separation distance between the peak SAR locations $R_l$ .....      | 102        |
| Annex B.7:      | Z-axis scan .....                                                   | 108        |
| Annex B.8:      | Liquid depth .....                                                  | 110        |
| <b>Annex C:</b> | <b>Photo documentation .....</b>                                    | <b>112</b> |
| <b>Annex D:</b> | <b>RF Technical Brief Cover Sheet acc. to RSS-102 Annex A .....</b> | <b>113</b> |
| Annex D.1:      | Declaration of RF Exposure Compliance.....                          | 113        |
| <b>Annex E:</b> | <b>Calibration parameters.....</b>                                  | <b>114</b> |
| <b>Annex F:</b> | <b>Document History .....</b>                                       | <b>114</b> |
| <b>Annex G:</b> | <b>Further Information .....</b>                                    | <b>114</b> |

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

### 2.2 Application details

|                                    |            |
|------------------------------------|------------|
| Date of receipt of order:          | 2012-12-06 |
| Date of receipt of test item:      | 2012-12-13 |
| Start of test:                     | 2012-12-15 |
| End of test:                       | 2013-01-05 |
| Person(s) present during the test: |            |

### 2.3 Statement of compliance

The SAR values found for the TM-0000-BV Tablet PC are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1 g tissue according to the FCC rule §2.1093, the ANSI/IEEE C 95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Health Canada's Safety Code 6 and the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure.

## 2.4 Technical details

| Band tested for this test report    | Technology | Frequency band | Lowest transmit frequency/MHz | Highest transmit frequency/MHz | Lowest receive Frequency/MHz | Highest receive Frequency/MHz | Kind of modulation | Power Class | Tested power control level | GPRS/EGPRS mobile station class | GPRS/EGPRS multislot class | (E)GPRS voice mode or DTM | Test channel low | Test channel middle | Test channel high | Maximum output power/dBm )* |                |
|-------------------------------------|------------|----------------|-------------------------------|--------------------------------|------------------------------|-------------------------------|--------------------|-------------|----------------------------|---------------------------------|----------------------------|---------------------------|------------------|---------------------|-------------------|-----------------------------|----------------|
|                                     |            |                |                               |                                |                              |                               |                    |             |                            |                                 |                            |                           |                  |                     |                   | Full power                  | Power back off |
| <input type="checkbox"/>            | GSM        | GSM            | 880.2                         | 914.8                          | 925.2                        | 959.8                         | GMSK 8-PSK         | 4 E2        | 5                          | B                               | 12                         | no                        | 975              | 37                  | 124               | 32.6                        | --             |
| <input type="checkbox"/>            | GSM        | DCS            | 1710.2                        | 1784.8                         | 1805.2                       | 1879.8                        | GMSK 8-PSK         | 1 E2        | 0                          | B                               | 12                         | no                        | 512              | 698                 | 885               | 29.8                        | --             |
| <input checked="" type="checkbox"/> | GSM        | cellular       | 824.2                         | 848.8                          | 869.2                        | 893.8                         | GMSK 8-PSK         | 4 E2        | 5                          | B                               | 12                         | no                        | 128              | 190                 | 251               | 33.4                        | 27.6           |
| <input checked="" type="checkbox"/> | GSM        | PCS            | 1850.2                        | 1909.8                         | 1930.2                       | 1989.8                        | GMSK 8-PSK         | 1 E2        | 0                          | B                               | 12                         | no                        | 512              | 661                 | 810               | 30.5                        | 25.8           |
| <input type="checkbox"/>            | UMTS       | FDD I          | 1922.4                        | 1977.6                         | 2112.4                       | 2167.6                        | QPSK               | 3 max       | --                         | --                              | --                         | --                        | 9612             | 9750                | 9888              | 23.9                        | --             |
| <input checked="" type="checkbox"/> | UMTS       | FDD V          | 826.4                         | 846.6                          | 871.4                        | 891.6                         | QPSK               | 3 max       | --                         | --                              | --                         | --                        | 4132             | 4182                | 4233              | 22.8                        | 19.7           |
| <input type="checkbox"/>            | UMTS       | FDD VI         | 832.4                         | 837.6                          | 875                          | 885                           | QPSK               | 3 max       | --                         | --                              | --                         | --                        | 4162             | 4175                | 4188              | 22.2                        | 19.0           |
| <input type="checkbox"/>            | UMTS       | FDD XIX        | 832.4                         | 842.6                          | 877.4                        | 887.6                         | QPSK               | 3 max       | --                         | --                              | --                         | --                        | 312              | 335                 | 363               | 22.1                        | 18.9           |
| <input type="checkbox"/>            | LTE        | FDD 1          | 1920                          | 1980                           | 2110                         | 2170                          | OFDM               | 3 max       | --                         | --                              | --                         | --                        | 18000            | 18300               | 18599             | 23.7                        | --             |
| <input type="checkbox"/>            | LTE        | FDD 19         | 830                           | 845                            | 875                          | 890                           | QPSK               | 3 max       | --                         | --                              | --                         | --                        | 24050            | 24075               | 24100             | 23.8                        | --             |
| <input type="checkbox"/>            | LTE        | FDD 21         | 1447.9                        | 1462.9                         | 1495.9                       | 1510.9                        | 16QAM              | 3 max       | --                         | --                              | --                         | --                        | 24500            | 24525               | 24550             | 23.8                        | --             |
| <input type="checkbox"/>            | WLAN       | ISM            | 2412                          | 2472                           | 2412                         | 2472                          | CCK OFDM           | -- max      | --                         | --                              | --                         | --                        | 1                | 7                   | 13                | 11.4                        | --             |
| <input checked="" type="checkbox"/> | WLAN US    | ISM            | 2412                          | 2462                           | 2412                         | 2462                          | CCK OFDM           | -- max      | --                         | --                              | --                         | --                        | 1                | 6                   | 11                | 11.4                        | --             |
| <input checked="" type="checkbox"/> | WLAN       | ISM            | 5180                          | 5240                           | 5180                         | 5240                          | OFDM               | -- max      | --                         | --                              | --                         | --                        | 36               | --                  | --                | 9.0                         | --             |
| <input checked="" type="checkbox"/> | WLAN       | ISM            | 5260                          | 5320                           | 5260                         | 5320                          | OFDM               | -- max      | --                         | --                              | --                         | --                        | 52               | --                  | --                | 8.6                         | --             |
| <input checked="" type="checkbox"/> | WLAN       | ISM            | 5500                          | 5700                           | 5500                         | 5700                          | OFDM               | -- max      | --                         | --                              | --                         | --                        | --               | 112                 | --                | 7.4                         | --             |
| <input checked="" type="checkbox"/> | WLAN       | ISM            | 5745                          | 5825                           | 5745                         | 5825                          | OFDM               | -- max      | --                         | --                              | --                         | --                        | 149              | --                  | --                | 9.3                         | --             |
| <input type="checkbox"/>            | BT         | ISM            | 2402                          | 2480                           | 2402                         | 2480                          | GFSK               | 3 max       | --                         | --                              | --                         | --                        | 0                | 39                  | 78                | 9.6                         | --             |

| supported UMTS features | category | remarks                         |
|-------------------------|----------|---------------------------------|
| Release 5 HSDPA         | 10       | QPSK, 16QAM, 14 Mbit/s          |
| Release 6 HSUPA         | 6        | no 16QAM , no MIMO, 5.76 Mbit/s |

)\*: slotted peak power for GSM, averaged max. RMS power for UMTS, WLAN and BT.

## 2.5 Transmitter and Antenna Operating Configurations

| Simultaneous transmission conditions |               |
|--------------------------------------|---------------|
| GSM / GPRS / EDGE                    | + BT/BLE      |
| GSM / GPRS / EDGE                    | + WLAN 2.4GHz |
| GSM / GPRS / EDGE                    | + WLAN 5GHz   |
| UMTS / HSPA                          | + BT/BLE      |
| UMTS / HSPA                          | + WLAN 2.4GHz |
| UMTS / HSPA                          | + WLAN 5GHz   |

Table 1: Simultaneous transmission conditions

Note: BT and WLAN can be active at the same time, but only with interleaving of packages switched on board level. That means that they don't transmit at the same time.

### 3 Test standards/ procedures references

| Test Standard                   | Version            | Test Standard Description                                                                                                                                                                                                                                                                                                          |
|---------------------------------|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| OET Bulletin 65<br>Supplement C | 1997-01<br>2001-01 | Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields                                                                                                                                                                                                                              |
| RSS-102 Issue 4                 | 2010-03            | Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)                                                                                                                                                                                                                                          |
| Canada's Safety Code No. 6      | 99-EHD-237         | Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz                                                                                                                                                                                                                     |
| IEEE Std. C95-3                 | 2002               | IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave                                                                                                                                                                                                                   |
| IEEE Std. C95-1                 | 1992               | IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.                                                                                                                                                                                                        |
| IEC 62209-2                     | 2010               | Human exposure to radio frequency fields from hand-held and bodymounted wireless communication devices. Human models, instrumentation, and procedures. Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz) |

#### FCC KDBs:

|                  |                   |                                                                                                     |
|------------------|-------------------|-----------------------------------------------------------------------------------------------------|
| KDB 865664D01v01 | October 24, 2012  | FCC OET SAR measurement requirements 100 MHz to 6 GHz                                               |
| KDB 865664D02v01 | October 24, 2012  | RF Exposure Compliance Reporting and Documentation Considerations                                   |
| KDB 447498D01v05 | October 24, 2012  | Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies             |
| KDB 648474D04v01 | October 24, 2012  | SAR Evaluation Considerations for Handsets with Multiple Transmitters & Antennas                    |
| KDB 941225D01v02 | April 10, 2007    | SAR Measurements Procedures for 3G Devices                                                          |
| KDB 941225D02v01 | December 14, 2009 | 3GPP R6 HSPA and R7 HSPA+ SAR Guidance                                                              |
| KDB 941225D03v01 | December, 2008    | SAR Test Reduction Procedure for GSM/GPRS/EDGE                                                      |
| KDB 248227D01v01 | May, 2007         | SAR Measurement Procedures for 802.11 a/b/g Transmitters                                            |
| KDB 450824D01v01 | January, 2007     | SAR Probe Calibration and System Verification considerations for measurements from 150 MHz to 3 GHz |
| KDB 450824D01v01 | March 4, 2012     | Dipole Requirements for SAR System Validation and Verification                                      |
| KDB 616217D04v01 | October 24, 2012  | SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers                    |

#### Additional KDB inquiry:

Individual FCC KDB guidance regarding to proper consideration of the G-sensor controlled power back-off feature of the device has been applied which requires using the standard SAR measurement procedures for tablet computers. Section 7.1 describes the G-sensor control depending on device orientation and conducted power with and without back-off is listed in section 7.2.

### 3.1 RF exposure limits

| Human Exposure                                  | Uncontrolled Environment<br>General Population | Controlled Environment<br>Occupational |
|-------------------------------------------------|------------------------------------------------|----------------------------------------|
| Spatial Peak SAR*<br>(Brain and Trunk)          | <b>1.60 mW/g</b>                               | 8.00 mW/g                              |
| Spatial Average SAR**<br>(Whole Body)           | 0.08 mW/g                                      | 0.40 mW/g                              |
| Spatial Peak SAR***<br>(Hands/Feet/Ankle/Wrist) | 4.00 mW/g                                      | 20.00 mW/g                             |

Table 2: RF exposure limits

The limit applied in this test report is shown in bold letters

Notes:

\* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

\*\* The Spatial Average value of the SAR averaged over the whole body.

\*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

#### 4 Summary of Measurement Results

|                                          |                                                             |       |       |       |
|------------------------------------------|-------------------------------------------------------------|-------|-------|-------|
| <input checked="" type="checkbox"/>      | No deviations from the technical specifications ascertained |       |       |       |
| <input type="checkbox"/>                 | Deviations from the technical specifications ascertained    |       |       |       |
| Maximum SAR value reported for 1g (W/kg) |                                                             |       |       |       |
|                                          |                                                             | PCE   | DTS   | UNII  |
| body 0 mm distance                       |                                                             | 1.436 | 1.284 | 0.953 |
| collocated situations                    | ΣSAR evaluation                                             | 2.720 |       |       |
|                                          | SPLSR <sub>i</sub>                                          | 0.019 |       |       |

#### 4.1 SAR measurement variability and measurement uncertainty analysis

This analysis is required for worst case results larger than 0.8 W/kg.

| frequency band | highest measurement result at worst case position | second measurement result at worst case position | ratio |
|----------------|---------------------------------------------------|--------------------------------------------------|-------|
| GSM 835        | 1.436                                             | 1.305                                            | 1.10  |
| GSM 1900       | 0.954                                             | 0.869                                            | 1.10  |
| UMTS FDD V     | 1.210                                             | 1.180                                            | 1.03  |
| WLAN 2.4 GHz   | 1.284                                             | 1.126                                            | 1.14  |
| WLAN 5 GHz     | 0.936                                             | 0.819                                            | 1.15  |

#### 5 Test Environment


|                            |                                       |
|----------------------------|---------------------------------------|
| Ambient temperature:       | 20 – 24 °C                            |
| Tissue Simulating liquid:  | 20 – 24 °C                            |
| Relative humidity content: | 40 – 50 %                             |
| Air pressure:              | not relevant for this kind of testing |
| Power supply:              | 230 V / 50 Hz                         |

Exact temperature values for each test are shown in the table(s) under 7.1 and/or on the measurement plots.

## 6 Test Set-up

### 6.1 Measurement system

#### 6.1.1 System Description

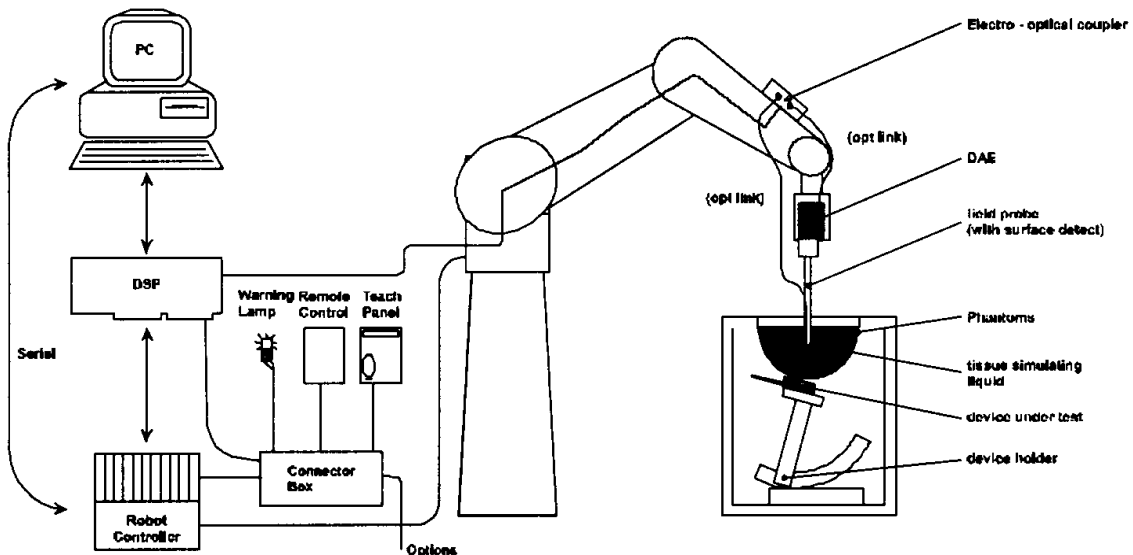

- The DASYS system for performing compliance tests consists of the following items:
- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASYS measurement server.
- The DASYS measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows XP or Windows 7.
- DASYS software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

### 6.1.2 Test environment

The DASY measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m<sup>3</sup>, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m<sup>2</sup> array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.

The system allows the measurement of SAR values larger than 0.005 mW/g.

### 6.1.3 Probe description

Isotropic E-Field Probe ET3DV6 for Dosimetric Measurements

| Technical data according to manufacturer information |                                                                                                                                                                                                                           |
|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction                                         | Symmetrical design with triangular core<br>Built-in optical fiber for surface detection system<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., glycolether) |
| Calibration                                          | In air from 10 MHz to 2.5 GHz<br>In head tissue simulating liquid (HSL) at 900 (800-1000) MHz and 1.8 GHz (1700-1910 MHz) (accuracy $\pm 9.5\%$ ; $k=2$ ) Calibration for other liquids and frequencies upon request      |
| Frequency                                            | 10 MHz to 3 GHz (dosimetry); Linearity: $\pm 0.2$ dB (30 MHz to 3 GHz)                                                                                                                                                    |
| Directivity                                          | $\pm 0.2$ dB in HSL (rotation around probe axis)<br>$\pm 0.4$ dB in HSL (rotation normal to probe axis)                                                                                                                   |
| Dynamic range                                        | 5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB                                                                                                                                                                        |
| Optical Surface Detection                            | $\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surfaces (ET3DV6 only)                                                                                                                        |
| Dimensions                                           | Overall length: 330 mm<br>Tip length: 16 mm<br>Body diameter: 12 mm<br>Tip diameter: 6.8 mm<br>Distance from probe tip to dipole centers: 2.7 mm                                                                          |
| Application                                          | General dosimetry up to 3 GHz<br>Compliance tests of mobile phones<br>Fast automatic scanning in arbitrary phantoms (ET3DV6)                                                                                              |

#### 6.1.4 Phantom description

The ELI4 Phantom meets the requirements specified in Edition 01-01 of Supplement C to OET Bulletin 65 for Specific Absorption Rate (SAR) measurements. The phantom consists of a fibreglass shell integrated in a wooden table.



The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI4 is fully compatible with the standard IEC 62209-2 and all known tissue simulating liquids.


#### 6.1.5 Device holder description



The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.

Larger DUT's (e.g. notebooks) cannot be tested using the device holder without the extension kit described below.

#### 6.1.6 Laptop Extension Kit for Device holder

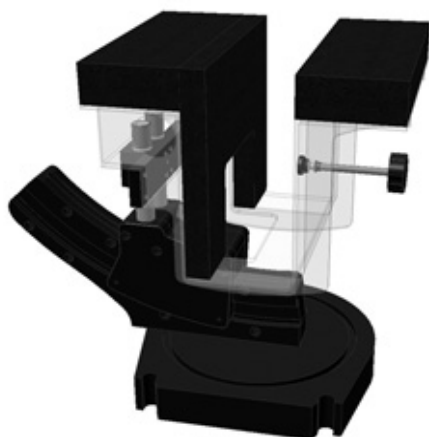

SPEAG released a simple but effective extension for their Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc).

The extension is lightweight and made of POM, PET-G acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner.

### 6.1.7 Scanning procedure

- The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.
- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The „surface check“ measurement tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1\text{mm}$ ). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within  $\pm 30^\circ$ .)
- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension. If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex 2.
- A „zoom scan“ measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse“ scan. This is a fine 7x7 grid where the robot additionally moves the probe in 7 steps along the z-axis away from the bottom of the Phantom. Grid spacing for the cube measurement is 5 mm in x and y-direction and 5 mm in z-direction. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex 2. Test results relevant for the specified standard (see section 3) are shown in table form in section 7.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in annex 2.

### 6.1.8 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 7 x 7 x 7 points. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.

### Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

### Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff ].

### Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

### Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

## 6.1.9 Data Storage and Evaluation

### Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4", ".DA5x". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

|                    |                           |                                         |
|--------------------|---------------------------|-----------------------------------------|
| Probe parameters:  | - Sensitivity             | $\text{Norm}_i, a_{i0}, a_{i1}, a_{i2}$ |
|                    | - Conversion factor       | $\text{ConvF}_i$                        |
|                    | - Diode compression point | $\text{Dcpi}$                           |
| Device parameters: | - Frequency               | $f$                                     |
|                    | - Crest factor            | $cf$                                    |
| Media parameters:  | - Conductivity            | $\sigma$                                |
|                    | - Density                 | $\rho$                                  |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with  $V_i$  = compensated signal of channel i (i = x, y, z)  
 $U_i$  = input signal of channel i (i = x, y, z)  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:  $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes:  $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with  $V_i$  = compensated signal of channel i (i = x, y, z)  
 $Norm_i$  = sensor sensitivity of channel i (i = x, y, z)  
[mV/(V/m)<sup>2</sup>] for E-field Probes  
 $ConvF$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with  $SAR$  = local specific absorption rate in mW/g  
 $E_{tot}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>  
 $E_{tot}$  = total electric field strength in V/m  
 $H_{tot}$  = total magnetic field strength in A/m

### 6.1.10 Tissue simulating liquids: dielectric properties

The following materials are used for producing the tissue-equivalent materials.

(Liquids used for tests described in section 7. are marked with ☒) :

| Ingredients<br>(% of weight) | Frequency (MHz)              |                              |                                         |                              |                               |                               |                                          |                                          |                                          |
|------------------------------|------------------------------|------------------------------|-----------------------------------------|------------------------------|-------------------------------|-------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|
|                              | <input type="checkbox"/> 450 | <input type="checkbox"/> 750 | <input checked="" type="checkbox"/> 835 | <input type="checkbox"/> 900 | <input type="checkbox"/> 1450 | <input type="checkbox"/> 1800 | <input checked="" type="checkbox"/> 1900 | <input checked="" type="checkbox"/> 2450 | <input checked="" type="checkbox"/> 5000 |
| frequency band               |                              |                              |                                         |                              |                               |                               |                                          |                                          |                                          |
| Tissue Type                  | Body                         | Body                         | Body                                    | Body                         | Body                          | Body                          | Body                                     | Body                                     | Body                                     |
| Water                        | 51.16                        | 51.7                         | 52.4                                    | 56.0                         | 70.97                         | 69.91                         | 69.91                                    | 73.2                                     | 64 - 78                                  |
| Salt (NaCl)                  | 1.49                         | 0.9                          | 1.40                                    | 0.76                         | 0.43                          | 0.13                          | 0.13                                     | 0.04                                     | 2 - 3                                    |
| Sugar                        | 46.78                        | 47.2                         | 45.0                                    | 41.76                        | 0.0                           | 0.0                           | 0.0                                      | 0.0                                      | 0.0                                      |
| HEC                          | 0.52                         | 0.0                          | 1.0                                     | 1.21                         | 0.0                           | 0.0                           | 0.0                                      | 0.0                                      | 0.0                                      |
| Bactericide                  | 0.05                         | 0.1                          | 0.1                                     | 0.27                         | 0.0                           | 0.0                           | 0.0                                      | 0.0                                      | 0.0                                      |
| Triton X-100                 | 0.0                          | 0.0                          | 0.0                                     | 0.0                          | 0.0                           | 0.0                           | 0.0                                      | 0.0                                      | 0.0                                      |
| DGBE                         | 0.0                          | 0.0                          | 0.0                                     | 0.0                          | 28.60                         | 29.96                         | 29.96                                    | 26.7                                     | 0.0                                      |
| Emulsifiers                  | 0.0                          | 0.0                          | 0.0                                     | 0.0                          | 0.0                           | 0.0                           | 0.0                                      | 0.0                                      | 9 - 15                                   |
| Mineral Oil                  | 0.0                          | 0.0                          | 0.0                                     | 0.0                          | 0.0                           | 0.0                           | 0.0                                      | 0.0                                      | 11 - 18                                  |

Table 3: Body tissue dielectric properties

Salt: 99+% Pure Sodium Chloride

Water: De-ionized, 16MΩ+ resistivity

Sugar: 98+% Pure Sucrose

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Note: Due to their availability body tissue simulating liquids as defined by FCC OET Bulletin 65 Supplement C are generally used for body worn SAR testing according to European standards.

### 6.1.11 Tissue simulating liquids: parameters

| Liquid<br>MSL | Freq.<br>(MHz) | Target body tissue |                       | Measurement body tissue |        |                       |        | Measurement<br>date |
|---------------|----------------|--------------------|-----------------------|-------------------------|--------|-----------------------|--------|---------------------|
|               |                | Permittivity       | Conductivity<br>[S/m] | Permittivity            | Dev. % | Conductivity<br>[S/m] | Dev. % |                     |
| 850/900       | 824            | 55.2               | 0.97                  | 55.4                    | 0.4%   | 0.97                  | 0.0%   | 2012-12-15          |
|               | 837            | 55.2               | 0.97                  | 55.4                    | 0.4%   | 0.98                  | 1.0%   | 2012-12-15          |
|               | 849            | 55.2               | 0.97                  | 55.3                    | 0.2%   | 0.99                  | 2.1%   | 2012-12-15          |
|               | 900            | 55.0               | 1.05                  | 54.8                    | -0.4%  | 1.04                  | -1.0%  | 2012-12-15          |
| 1900          | 1850           | 53.3               | 1.52                  | 53.3                    | 0.0%   | 1.46                  | -3.9%  | 2012-12-18          |
|               | 1880           | 53.3               | 1.52                  | 53.2                    | -0.2%  | 1.49                  | -2.0%  | 2012-12-18          |
|               | 1900           | 53.3               | 1.52                  | 53.1                    | -0.4%  | 1.52                  | 0.0%   | 2012-12-18          |
|               | 1910           | 53.3               | 1.52                  | 53.1                    | -0.4%  | 1.53                  | 0.7%   | 2012-12-18          |
| 2450          | 2412           | 52.7               | 1.95                  | 52.3                    | -0.8%  | 1.96                  | 0.5%   | 2012-12-19          |
|               | 2437           | 52.7               | 1.95                  | 52.3                    | -0.8%  | 1.99                  | 2.1%   | 2012-12-19          |
|               | 2450           | 52.7               | 1.95                  | 52.3                    | -0.8%  | 2.00                  | 2.6%   | 2012-12-19          |
|               | 2462           | 52.7               | 1.95                  | 52.2                    | -0.9%  | 2.01                  | 3.1%   | 2012-12-19          |
|               | 2472           | 52.7               | 1.95                  | 52.1                    | -1.1%  | 2.02                  | 3.6%   | 2012-12-19          |
| 5GHz          | 5180           | 49.0               | 5.30                  | 48.0                    | -2.0%  | 5.34                  | 0.8%   | 2013-01-05          |
|               | 5200           | 49.0               | 5.30                  | 48.0                    | -2.0%  | 5.34                  | 0.8%   | 2013-01-05          |
|               | 5260           | 48.9               | 5.40                  | 47.9                    | -2.0%  | 5.41                  | 0.2%   | 2013-01-05          |
|               | 5500           | 48.6               | 5.65                  | 47.3                    | -2.7%  | 5.71                  | 1.1%   | 2013-01-05          |
|               | 5560           | 48.6               | 5.65                  | 47.2                    | -2.9%  | 5.78                  | 2.3%   | 2013-01-05          |
|               | 5700           | 48.2               | 6.00                  | 46.9                    | -2.7%  | 5.97                  | -0.5%  | 2013-01-05          |
|               | 5745           | 48.2               | 6.00                  | 46.8                    | -3.0%  | 6.01                  | 0.2%   | 2013-01-05          |
|               | 5800           | 48.2               | 6.00                  | 46.7                    | -3.1%  | 6.10                  | 1.7%   | 2013-01-05          |

Table 4: Parameter of the body tissue simulating liquid

Note: The dielectric properties have been measured using the contact probe method at 22°C.

### 6.1.12 Measurement uncertainty evaluation for SAR test

| Relative DASY5 Uncertainty Budget for SAR Tests                |                   |                          |         |                |                |                      |            |                                                 |
|----------------------------------------------------------------|-------------------|--------------------------|---------|----------------|----------------|----------------------|------------|-------------------------------------------------|
| According to IEEE 1528/2011 and IEC62209/2011 (0.3-3GHz range) |                   |                          |         |                |                |                      |            |                                                 |
| Error Description                                              | Uncertainty Value | Probability Distribution | Divisor | c <sub>i</sub> | c <sub>i</sub> | Standard Uncertainty |            | v <sub>i</sub> <sup>2</sup> or v <sub>eff</sub> |
|                                                                |                   |                          |         | (1g)           | (10g)          | ± %, (1g)            | ± %, (10g) |                                                 |
| Measurement System                                             |                   |                          |         |                |                |                      |            |                                                 |
| Probe calibration                                              | ± 6.0 %           | Normal                   | 1       | 1              | 1              | ± 6.0 %              | ± 6.0 %    | ∞                                               |
| Axial isotropy                                                 | ± 4.7 %           | Rectangular              | √ 3     | 0.7            | 0.7            | ± 1.9 %              | ± 1.9 %    | ∞                                               |
| Hemispherical isotropy                                         | ± 9.6 %           | Rectangular              | √ 3     | 0.7            | 0.7            | ± 3.9 %              | ± 3.9 %    | ∞                                               |
| Boundary effects                                               | ± 1.0 %           | Rectangular              | √ 3     | 1              | 1              | ± 0.6 %              | ± 0.6 %    | ∞                                               |
| Probe linearity                                                | ± 4.7 %           | Rectangular              | √ 3     | 1              | 1              | ± 2.7 %              | ± 2.7 %    | ∞                                               |
| System detection limits                                        | ± 1.0 %           | Rectangular              | √ 3     | 1              | 1              | ± 0.6 %              | ± 0.6 %    | ∞                                               |
| Modulation Response                                            | ± 2.4 %           | Rectangular              | √ 3     | 1              | 1              | ± 1.4 %              | ± 1.4 %    | ∞                                               |
| Readout electronics                                            | ± 0.3 %           | Normal                   | 1       | 1              | 1              | ± 0.3 %              | ± 0.3 %    | ∞                                               |
| Response time                                                  | ± 0.8 %           | Rectangular              | √ 3     | 1              | 1              | ± 0.5 %              | ± 0.5 %    | ∞                                               |
| Integration time                                               | ± 2.6 %           | Rectangular              | √ 3     | 1              | 1              | ± 1.5 %              | ± 1.5 %    | ∞                                               |
| RF ambient noise                                               | ± 3.0 %           | Rectangular              | √ 3     | 1              | 1              | ± 1.7 %              | ± 1.7 %    | ∞                                               |
| RF ambient reflections                                         | ± 3.0 %           | Rectangular              | √ 3     | 1              | 1              | ± 1.7 %              | ± 1.7 %    | ∞                                               |
| Probe positioner                                               | ± 0.4 %           | Rectangular              | √ 3     | 1              | 1              | ± 0.2 %              | ± 0.2 %    | ∞                                               |
| Probe positioning                                              | ± 2.9 %           | Rectangular              | √ 3     | 1              | 1              | ± 1.7 %              | ± 1.7 %    | ∞                                               |
| Max. SAR evaluation                                            | ± 2.0 %           | Rectangular              | √ 3     | 1              | 1              | ± 1.2 %              | ± 1.2 %    | ∞                                               |
| Test Sample Related                                            |                   |                          |         |                |                |                      |            |                                                 |
| Device positioning                                             | ± 2.9 %           | Normal                   | 1       | 1              | 1              | ± 2.9 %              | ± 2.9 %    | 145                                             |
| Device holder uncertainty                                      | ± 3.6 %           | Normal                   | 1       | 1              | 1              | ± 3.6 %              | ± 3.6 %    | 5                                               |
| Power drift                                                    | ± 5.0 %           | Rectangular              | √ 3     | 1              | 1              | ± 2.9 %              | ± 2.9 %    | ∞                                               |
| Phantom and Set-up                                             |                   |                          |         |                |                |                      |            |                                                 |
| Phantom uncertainty                                            | ± 6.1 %           | Rectangular              | √ 3     | 1              | 1              | ± 3.5 %              | ± 3.5 %    | ∞                                               |
| SAR correction                                                 | ± 1.9 %           | Rectangular              | √ 3     | 1              | 0.84           | ± 1.1 %              | ± 0.9 %    | ∞                                               |
| Liquid conductivity (meas.)                                    | ± 5.0 %           | Rectangular              | √ 3     | 0.78           | 0.71           | ± 2.3 %              | ± 2.0 %    | ∞                                               |
| Liquid permittivity (meas.)                                    | ± 5.0 %           | Rectangular              | √ 3     | 0.26           | 0.26           | ± 0.8 %              | ± 0.8 %    | ∞                                               |
| Temp. Unc. - Conductivity                                      | ± 3.4 %           | Rectangular              | √ 3     | 0.78           | 0.71           | ± 1.5 %              | ± 1.4 %    | ∞                                               |
| Temp. Unc. - Permittivity                                      | ± 0.4 %           | Rectangular              | √ 3     | 0.23           | 0.26           | ± 0.1 %              | ± 0.1 %    | ∞                                               |
| Combined Uncertainty                                           |                   |                          |         |                |                | ± 11.3 %             | ± 11.3 %   | 330                                             |
| Expanded Std. Uncertainty                                      |                   |                          |         |                |                | ± 22.7 %             | ± 22.5 %   |                                                 |

Table 5: Measurement uncertainties

Worst-Case uncertainty budget for DASY5 assessed according to IEEE 1528/2011 and IEC 62209-1/2011 draft standards. The budget is valid for the frequency range 300MHz -3 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerable smaller.

| Relative DASY5 Uncertainty Budget for SAR Tests |                   |                          |         |                |                |                      |            |                                                 |
|-------------------------------------------------|-------------------|--------------------------|---------|----------------|----------------|----------------------|------------|-------------------------------------------------|
| for the 3-6 GHz range                           |                   |                          |         |                |                |                      |            |                                                 |
| Error Description                               | Uncertainty Value | Probability Distribution | Divisor | c <sub>i</sub> | c <sub>i</sub> | Standard Uncertainty |            | v <sub>i</sub> <sup>2</sup> or v <sub>eff</sub> |
|                                                 |                   |                          |         | (1g)           | (10g)          | ± %, (1g)            | ± %, (10g) |                                                 |
| Measurement System                              |                   |                          |         |                |                |                      |            |                                                 |
| Probe calibration                               | ± 6.6 %           | Normal                   | 1       | 1              | 1              | ± 6.6 %              | ± 6.6 %    | ∞                                               |
| Axial isotropy                                  | ± 4.7 %           | Rectangular              | √ 3     | 0.7            | 0.7            | ± 1.9 %              | ± 1.9 %    | ∞                                               |
| Hemispherical isotropy                          | ± 9.6 %           | Rectangular              | √ 3     | 0.7            | 0.7            | ± 3.9 %              | ± 3.9 %    | ∞                                               |
| Boundary effects                                | ± 2.0 %           | Rectangular              | √ 3     | 1              | 1              | ± 1.2 %              | ± 1.2 %    | ∞                                               |
| Probe linearity                                 | ± 4.7 %           | Rectangular              | √ 3     | 1              | 1              | ± 2.7 %              | ± 2.7 %    | ∞                                               |
| System detection limits                         | ± 1.0 %           | Rectangular              | √ 3     | 1              | 1              | ± 0.6 %              | ± 0.6 %    | ∞                                               |
| Readout electronics                             | ± 0.3 %           | Normal                   | 1       | 1              | 1              | ± 0.3 %              | ± 0.3 %    | ∞                                               |
| Response time                                   | ± 0.8 %           | Rectangular              | √ 3     | 1              | 1              | ± 0.5 %              | ± 0.5 %    | ∞                                               |
| Integration time                                | ± 2.6 %           | Rectangular              | √ 3     | 1              | 1              | ± 1.5 %              | ± 1.5 %    | ∞                                               |
| RF ambient noise                                | ± 3.0 %           | Rectangular              | √ 3     | 1              | 1              | ± 1.7 %              | ± 1.7 %    | ∞                                               |
| RF ambient reflections                          | ± 3.0 %           | Rectangular              | √ 3     | 1              | 1              | ± 1.7 %              | ± 1.7 %    | ∞                                               |
| Probe positioner                                | ± 0.8 %           | Rectangular              | √ 3     | 1              | 1              | ± 0.5 %              | ± 0.5 %    | ∞                                               |
| Probe positioning                               | ± 6.7 %           | Rectangular              | √ 3     | 1              | 1              | ± 3.9 %              | ± 3.9 %    | ∞                                               |
| Max. SAR evaluation                             | ± 4.0 %           | Rectangular              | √ 3     | 1              | 1              | ± 2.3 %              | ± 2.3 %    | ∞                                               |
| Test Sample Related                             |                   |                          |         |                |                |                      |            |                                                 |
| Device positioning                              | ± 2.9 %           | Normal                   | 1       | 1              | 1              | ± 2.9 %              | ± 2.9 %    | 145                                             |
| Device holder uncertainty                       | ± 3.6 %           | Normal                   | 1       | 1              | 1              | ± 3.6 %              | ± 3.6 %    | 5                                               |
| Power drift                                     | ± 5.0 %           | Rectangular              | √ 3     | 1              | 1              | ± 2.9 %              | ± 2.9 %    | ∞                                               |
| Phantom and Set-up                              |                   |                          |         |                |                |                      |            |                                                 |
| Phantom uncertainty                             | ± 4.0 %           | Rectangular              | √ 3     | 1              | 1              | ± 2.3 %              | ± 2.3 %    | ∞                                               |
| Liquid conductivity (target)                    | ± 5.0 %           | Rectangular              | √ 3     | 0.64           | 0.43           | ± 1.8 %              | ± 1.2 %    | ∞                                               |
| Liquid conductivity (meas.)                     | ± 5.0 %           | Rectangular              | √ 3     | 0.64           | 0.43           | ± 1.8 %              | ± 1.2 %    | ∞                                               |
| Liquid permittivity (target)                    | ± 5.0 %           | Rectangular              | √ 3     | 0.6            | 0.49           | ± 1.7 %              | ± 1.4 %    | ∞                                               |
| Liquid permittivity (meas.)                     | ± 5.0 %           | Rectangular              | √ 3     | 0.6            | 0.49           | ± 1.7 %              | ± 1.4 %    | ∞                                               |
| Combined Uncertainty                            |                   |                          |         |                |                | ± 12.1 %             | ± 11.9 %   | 330                                             |
| Expanded Std. Uncertainty                       |                   |                          |         |                |                | ± 24.3 %             | ± 23.8 %   |                                                 |

Table 6: Measurement uncertainties

Worst-Case uncertainty budget for DASY5 valid for 3G communication signals and frequency range 3 - 6 GHz. Probe calibration error reflects uncertainty of the EX3D probe. For specific tests and configurations, the uncertainty could be considerable smaller.

| Relative DASY5 Uncertainty Budget for SAR Tests              |                   |                          |            |               |                |                      |                  |                      |
|--------------------------------------------------------------|-------------------|--------------------------|------------|---------------|----------------|----------------------|------------------|----------------------|
| According to IEEE 1528/2011 and IEC62209/2011 (3-6GHz range) |                   |                          |            |               |                |                      |                  |                      |
| Error Description                                            | Uncertainty Value | Probability Distribution | Divisor    | $c_i$<br>(1g) | $c_i$<br>(10g) | Standard Uncertainty |                  | $v_i^2$ or $v_{eff}$ |
|                                                              |                   |                          |            |               |                | $\pm \%$ , (1g)      | $\pm \%$ , (10g) |                      |
| <b>Measurement System</b>                                    |                   |                          |            |               |                |                      |                  |                      |
| Probe calibration                                            | $\pm 6.6 \%$      | Normal                   | 1          | 1             | 1              | $\pm 6.6 \%$         | $\pm 6.6 \%$     | $\infty$             |
| Axial isotropy                                               | $\pm 4.7 \%$      | Rectangular              | $\sqrt{3}$ | 0.7           | 0.7            | $\pm 1.9 \%$         | $\pm 1.9 \%$     | $\infty$             |
| Hemispherical isotropy                                       | $\pm 9.6 \%$      | Rectangular              | $\sqrt{3}$ | 0.7           | 0.7            | $\pm 3.9 \%$         | $\pm 3.9 \%$     | $\infty$             |
| Boundary effects                                             | $\pm 2.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 1.2 \%$         | $\pm 1.2 \%$     | $\infty$             |
| Probe linearity                                              | $\pm 4.7 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 2.7 \%$         | $\pm 2.7 \%$     | $\infty$             |
| System detection limits                                      | $\pm 1.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 0.6 \%$         | $\pm 0.6 \%$     | $\infty$             |
| Modulation Response                                          | $\pm 2.4 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 1.4 \%$         | $\pm 1.4 \%$     | $\infty$             |
| Readout electronics                                          | $\pm 0.3 \%$      | Normal                   | 1          | 1             | 1              | $\pm 0.3 \%$         | $\pm 0.3 \%$     | $\infty$             |
| Response time                                                | $\pm 0.8 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 0.5 \%$         | $\pm 0.5 \%$     | $\infty$             |
| Integration time                                             | $\pm 2.6 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 1.5 \%$         | $\pm 1.5 \%$     | $\infty$             |
| RF ambient noise                                             | $\pm 3.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 1.7 \%$         | $\pm 1.7 \%$     | $\infty$             |
| RF ambient reflections                                       | $\pm 3.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 1.7 \%$         | $\pm 1.7 \%$     | $\infty$             |
| Probe positioner                                             | $\pm 0.8 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 0.5 \%$         | $\pm 0.5 \%$     | $\infty$             |
| Probe positioning                                            | $\pm 6.7 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 3.9 \%$         | $\pm 3.9 \%$     | $\infty$             |
| Max. SAR evaluation                                          | $\pm 4.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 2.3 \%$         | $\pm 2.3 \%$     | $\infty$             |
| <b>Test Sample Related</b>                                   |                   |                          |            |               |                |                      |                  |                      |
| Device positioning                                           | $\pm 2.9 \%$      | Normal                   | 1          | 1             | 1              | $\pm 2.9 \%$         | $\pm 2.9 \%$     | 145                  |
| Device holder uncertainty                                    | $\pm 3.6 \%$      | Normal                   | 1          | 1             | 1              | $\pm 3.6 \%$         | $\pm 3.6 \%$     | 5                    |
| Power drift                                                  | $\pm 5.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 2.9 \%$         | $\pm 2.9 \%$     | $\infty$             |
| <b>Phantom and Set-up</b>                                    |                   |                          |            |               |                |                      |                  |                      |
| Phantom uncertainty                                          | $\pm 6.6 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 3.8 \%$         | $\pm 3.8 \%$     | $\infty$             |
| SAR correction                                               | $\pm 1.9 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 0.84           | $\pm 1.1 \%$         | $\pm 0.9 \%$     | $\infty$             |
| Liquid conductivity (meas.)                                  | $\pm 5.0 \%$      | Rectangular              | $\sqrt{3}$ | 0.78          | 0.71           | $\pm 2.3 \%$         | $\pm 2.0 \%$     | $\infty$             |
| Liquid permittivity (meas.)                                  | $\pm 5.0 \%$      | Rectangular              | $\sqrt{3}$ | 0.26          | 0.26           | $\pm 0.8 \%$         | $\pm 0.8 \%$     | $\infty$             |
| Temp. Unc. - Conductivity                                    | $\pm 3.4 \%$      | Rectangular              | $\sqrt{3}$ | 0.78          | 0.71           | $\pm 1.5 \%$         | $\pm 1.4 \%$     | $\infty$             |
| Temp. Unc. - Permittivity                                    | $\pm 0.4 \%$      | Rectangular              | $\sqrt{3}$ | 0.23          | 0.26           | $\pm 0.1 \%$         | $\pm 0.1 \%$     | $\infty$             |
| <b>Combined Uncertainty</b>                                  |                   |                          |            |               |                | $\pm 12.4 \%$        | $\pm 12.4 \%$    | 330                  |
| <b>Expanded Std. Uncertainty</b>                             |                   |                          |            |               |                | $\pm 24.9 \%$        | $\pm 24.8 \%$    |                      |

Table 7: Measurement uncertainties

Worst-Case uncertainty budget for DASY5 assessed according to IEEE 1528/2011 and IEC 62209-1/2011 draft standards. The budget is valid for the frequency range 3GHz -6GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerable smaller.

### 6.1.13 Measurement uncertainty evaluation for System Check

| Uncertainty of a System Performance Check with DASY5 System<br>for the 0.3 - 3 GHz range |                   |                          |            |               |                |                      |                  |                      |
|------------------------------------------------------------------------------------------|-------------------|--------------------------|------------|---------------|----------------|----------------------|------------------|----------------------|
| Source of uncertainty                                                                    | Uncertainty Value | Probability Distribution | Divisor    | $c_i$<br>(1g) | $c_i$<br>(10g) | Standard Uncertainty |                  | $v_i^2$ or $v_{eff}$ |
|                                                                                          |                   |                          |            |               |                | $\pm \%$ , (1g)      | $\pm \%$ , (10g) |                      |
| <b>Measurement System</b>                                                                |                   |                          |            |               |                |                      |                  |                      |
| Probe calibration                                                                        | $\pm 6.0 \%$      | Normal                   | 1          | 1             | 1              | $\pm 6.0 \%$         | $\pm 6.0 \%$     | $\infty$             |
| Axial isotropy                                                                           | $\pm 4.7 \%$      | Rectangular              | $\sqrt{3}$ | 0.7           | 0.7            | $\pm 1.9 \%$         | $\pm 1.9 \%$     | $\infty$             |
| Hemispherical isotropy                                                                   | $\pm 0.0 \%$      | Rectangular              | $\sqrt{3}$ | 0.7           | 0.7            | $\pm 0.0 \%$         | $\pm 0.0 \%$     | $\infty$             |
| Boundary effects                                                                         | $\pm 1.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 0.6 \%$         | $\pm 0.6 \%$     | $\infty$             |
| Probe linearity                                                                          | $\pm 4.7 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 2.7 \%$         | $\pm 2.7 \%$     | $\infty$             |
| System detection limits                                                                  | $\pm 1.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 0.6 \%$         | $\pm 0.6 \%$     | $\infty$             |
| Readout electronics                                                                      | $\pm 0.3 \%$      | Normal                   | 1          | 1             | 1              | $\pm 0.3 \%$         | $\pm 0.3 \%$     | $\infty$             |
| Response time                                                                            | $\pm 0.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 0.0 \%$         | $\pm 0.0 \%$     | $\infty$             |
| Integration time                                                                         | $\pm 0.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 0.0 \%$         | $\pm 0.0 \%$     | $\infty$             |
| RF ambient conditions                                                                    | $\pm 3.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 1.7 \%$         | $\pm 1.7 \%$     | $\infty$             |
| Probe positioner                                                                         | $\pm 0.4 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 0.2 \%$         | $\pm 0.2 \%$     | $\infty$             |
| Probe positioning                                                                        | $\pm 2.9 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 1.7 \%$         | $\pm 1.7 \%$     | $\infty$             |
| Max. SAR evaluation                                                                      | $\pm 1.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 0.6 \%$         | $\pm 0.6 \%$     | $\infty$             |
| <b>Test Sample Related</b>                                                               |                   |                          |            |               |                |                      |                  |                      |
| Dev. of experimental dipole                                                              | $\pm 0.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 0.0 \%$         | $\pm 0.0 \%$     | $\infty$             |
| Source to liquid distance                                                                | $\pm 2.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 1.2 \%$         | $\pm 1.2 \%$     | $\infty$             |
| Power drift                                                                              | $\pm 3.4 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 2.0 \%$         | $\pm 2.0 \%$     | $\infty$             |
| <b>Phantom and Set-up</b>                                                                |                   |                          |            |               |                |                      |                  |                      |
| Phantom uncertainty                                                                      | $\pm 4.0 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 1              | $\pm 2.3 \%$         | $\pm 2.3 \%$     | $\infty$             |
| SAR correction                                                                           | $\pm 1.9 \%$      | Rectangular              | $\sqrt{3}$ | 1             | 0.84           | $\pm 1.1 \%$         | $\pm 0.9 \%$     | $\infty$             |
| Liquid conductivity (meas.)                                                              | $\pm 5.0 \%$      | Normal                   | 1          | 0.78          | 0.71           | $\pm 3.9 \%$         | $\pm 3.6 \%$     | $\infty$             |
| Liquid permittivity (meas.)                                                              | $\pm 5.0 \%$      | Normal                   | 1          | 0.26          | 0.26           | $\pm 1.3 \%$         | $\pm 1.3 \%$     | $\infty$             |
| Temp. unc. - Conductivity                                                                | $\pm 1.7 \%$      | Rectangular              | $\sqrt{3}$ | 0.78          | 0.71           | $\pm 0.8 \%$         | $\pm 0.7 \%$     | $\infty$             |
| Temp. unc. - Permittivity                                                                | $\pm 0.3 \%$      | Rectangular              | $\sqrt{3}$ | 0.23          | 0.26           | $\pm 0.0 \%$         | $\pm 0.0 \%$     | $\infty$             |
| <b>Combined Uncertainty</b>                                                              |                   |                          |            |               |                | $\pm 9.1 \%$         | $\pm 8.9 \%$     | 330                  |
| <b>Expanded Std. Uncertainty</b>                                                         |                   |                          |            |               |                | $\pm 18.2 \%$        | $\pm 17.9 \%$    |                      |

Table 8: Measurement uncertainties of the System Check with DASY5 (0.3-3GHz)

| Uncertainty of a System Performance Check with DASY5 System<br>for the 3 - 6 GHz range |                      |                             |         |                |                |                      |            |                                                    |
|----------------------------------------------------------------------------------------|----------------------|-----------------------------|---------|----------------|----------------|----------------------|------------|----------------------------------------------------|
| Source of<br>uncertainty                                                               | Uncertainty<br>Value | Probability<br>Distribution | Divisor | c <sub>i</sub> | c <sub>i</sub> | Standard Uncertainty |            | v <sub>i</sub> <sup>2</sup> or<br>v <sub>eff</sub> |
|                                                                                        |                      |                             |         | (1g)           | (10g)          | ± %, (1g)            | ± %, (10g) |                                                    |
| Measurement System                                                                     |                      |                             |         |                |                |                      |            |                                                    |
| Probe calibration                                                                      | ± 6.6 %              | Normal                      | 1       | 1              | 1              | ± 6.6 %              | ± 6.6 %    | ∞                                                  |
| Axial isotropy                                                                         | ± 4.7 %              | Rectangular                 | √ 3     | 0.7            | 0.7            | ± 1.9 %              | ± 1.9 %    | ∞                                                  |
| Hemispherical isotropy                                                                 | ± 0.0 %              | Rectangular                 | √ 3     | 0.7            | 0.7            | ± 0.0 %              | ± 0.0 %    | ∞                                                  |
| Boundary effects                                                                       | ± 1.0 %              | Rectangular                 | √ 3     | 1              | 1              | ± 0.6 %              | ± 0.6 %    | ∞                                                  |
| Probe linearity                                                                        | ± 4.7 %              | Rectangular                 | √ 3     | 1              | 1              | ± 2.7 %              | ± 2.7 %    | ∞                                                  |
| System detection limits                                                                | ± 1.0 %              | Rectangular                 | √ 3     | 1              | 1              | ± 0.6 %              | ± 0.6 %    | ∞                                                  |
| Readout electronics                                                                    | ± 0.3 %              | Normal                      | 1       | 1              | 1              | ± 0.3 %              | ± 0.3 %    | ∞                                                  |
| Response time                                                                          | ± 0.0 %              | Rectangular                 | √ 3     | 1              | 1              | ± 0.0 %              | ± 0.0 %    | ∞                                                  |
| Integration time                                                                       | ± 0.0 %              | Rectangular                 | √ 3     | 1              | 1              | ± 0.0 %              | ± 0.0 %    | ∞                                                  |
| RF ambient conditions                                                                  | ± 3.0 %              | Rectangular                 | √ 3     | 1              | 1              | ± 1.7 %              | ± 1.7 %    | ∞                                                  |
| Probe positioner                                                                       | ± 0.8 %              | Rectangular                 | √ 3     | 1              | 1              | ± 0.5 %              | ± 0.5 %    | ∞                                                  |
| Probe positioning                                                                      | ± 6.7 %              | Rectangular                 | √ 3     | 1              | 1              | ± 3.9 %              | ± 3.9 %    | ∞                                                  |
| Max. SAR evaluation                                                                    | ± 1.0 %              | Rectangular                 | √ 3     | 1              | 1              | ± 0.6 %              | ± 0.6 %    | ∞                                                  |
| Test Sample Related                                                                    |                      |                             |         |                |                |                      |            |                                                    |
| Dev. of experimental dipole                                                            | ± 0.0 %              | Rectangular                 | √ 3     | 1              | 1              | ± 0.0 %              | ± 0.0 %    | ∞                                                  |
| Source to liquid distance                                                              | ± 2.0 %              | Rectangular                 | √ 3     | 1              | 1              | ± 1.2 %              | ± 1.2 %    | ∞                                                  |
| Power drift                                                                            | ± 3.4 %              | Rectangular                 | √ 3     | 1              | 1              | ± 2.0 %              | ± 2.0 %    | ∞                                                  |
| Phantom and Set-up                                                                     |                      |                             |         |                |                |                      |            |                                                    |
| Phantom uncertainty                                                                    | ± 4.0 %              | Rectangular                 | √ 3     | 1              | 1              | ± 2.3 %              | ± 2.3 %    | ∞                                                  |
| SAR correction                                                                         | ± 1.9 %              | Rectangular                 | √ 3     | 1              | 0.84           | ± 1.1 %              | ± 0.9 %    | ∞                                                  |
| Liquid conductivity (meas.)                                                            | ± 5.0 %              | Normal                      | 1       | 0.78           | 0.71           | ± 3.9 %              | ± 3.6 %    | ∞                                                  |
| Liquid permittivity (meas.)                                                            | ± 5.0 %              | Normal                      | 1       | 0.26           | 0.26           | ± 1.3 %              | ± 1.3 %    | ∞                                                  |
| Temp. unc. - Conductivity                                                              | ± 1.7 %              | Rectangular                 | √ 3     | 0.78           | 0.71           | ± 0.8 %              | ± 0.7 %    | ∞                                                  |
| Temp. unc. - Permittivity                                                              | ± 0.3 %              | Rectangular                 | √ 3     | 0.23           | 0.26           | ± 0.0 %              | ± 0.0 %    | ∞                                                  |
| Combined Uncertainty                                                                   |                      |                             |         |                |                | ± 10.1 %             | ± 10.0 %   | 330                                                |
| Expanded Std.<br>Uncertainty                                                           |                      |                             |         |                |                | ± 20.2 %             | ± 19.9 %   |                                                    |

Table 9: Measurement uncertainties of the System Check with DASY5 (3-6GHz)

Note: Worst case probe calibration uncertainty has been applied for all probes used during the measurements.

### 6.1.14 System check


The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE 1528. The following table shows system check results for all frequency bands and tissue liquids used during the tests (plot(s) see annex A).

| System validation Kit | Frequency        | Target SAR <sub>1g</sub><br>(1000 mW)<br>(+/- 10%) | Target SAR <sub>10g</sub><br>(1000 mW)<br>(+/- 10%) | Measured SAR <sub>1g</sub><br>(1000 mW) | Measured SAR <sub>10g</sub><br>(1000 mW) | Measured date |
|-----------------------|------------------|----------------------------------------------------|-----------------------------------------------------|-----------------------------------------|------------------------------------------|---------------|
| D900V2<br>S/N: 102    | 900 MHz<br>body  | 11.2 mW/g                                          | 7.24 mW/g                                           | 10.8 mW/g                               | 7.03 mW/g                                | 2012-12-15    |
| D900V2<br>S/N: 102    | 900 MHz<br>body  | 11.2 mW/g                                          | 7.24 mW/g                                           | 10.9 mW/g                               | 7.07 mW/g                                | 2012-12-17    |
| D1900V2<br>S/N: 5d009 | 1900 MHz<br>body | 40.9 mW/g                                          | 21.5 mW/g                                           | 41.6 mW/g                               | 22.3 mW/g                                | 2012-12-18    |
| D2450V2<br>S/N: 710   | 2450 MHz<br>body | 51.2 mW/g                                          | 23.9 mW/g                                           | 55.9 mW/g                               | 24.9 mW/g                                | 2012-12-19    |
| D5GHzV2<br>S/N: 1055  | 5200 MHz<br>body | 73.4 mW/g                                          | 20.7 mW/g                                           | 79.2 mW/g                               | 22.2 mW/g                                | 2013-01-05    |
| D5GHzV2<br>S/N: 1055  | 5500 MHz<br>body | 78.4 mW/g                                          | 21.7 mW/g                                           | 83.2 mW/g                               | 23.2 mW/g                                | 2013-01-05    |
| D5GHzV2<br>S/N: 1055  | 5800 MHz<br>body | 74.0 mW/g                                          | 20.4 mW/g                                           | 80.8 mW/g                               | 21.6 mW/g                                | 2013-01-05    |

Table 10: Results system check

### 6.1.15 System check procedure

The system check is performed by using a validation dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 1000 mW for frequencies below 2 GHz or 100 mW for frequencies above 2 GHz. To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot). System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

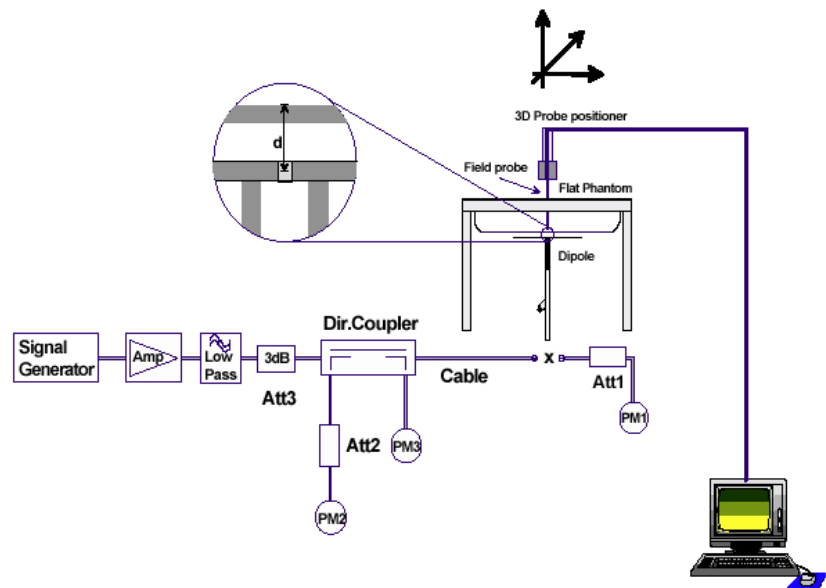


## 7 Detailed Test Results

### 7.1 G Sensor controlled power back off

#### 7.1.1 Description


The implemented acceleration sensor (G Sensor) in the device is used to determine how the relative position of the device towards the ground is. Through the triaxial coordinate values from the sensor the device is able to align the screen depending on the direction the device is held, for example switching between portrait and landscape modes.

An accelerometer in earth's gravitational shows  $1G(=9.8m/s^2)$  acceleration towards center of the Earth. The direction towards the center of the Earth is known as downward.

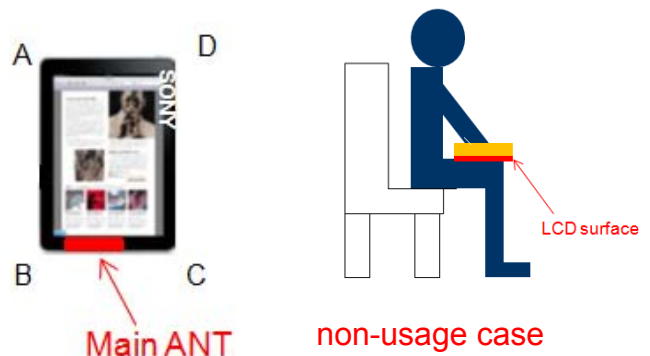

The acceleration sensor is used to trigger the power back off to meet SAR regulation.

The power back off is activated almost all the time. Only the non-usage case that the display is facing the ground will deactivate the power back off. If the device is tilted more than 5° degrees from the horizontal direction the power back off will be activated. The following picture describes the detection of the acceleration sensor for the power back off.

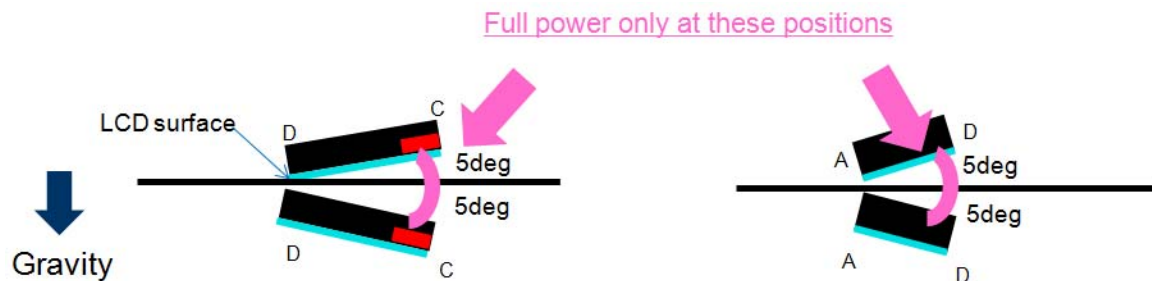


#### 7.1.2 Verification

The functionality of the sensor and back off system were verified during the conducted measurements. The DUT was positioned face down on a holder which was tilted from 0° to 5° degrees while the RF Power was monitored. All possible directions were checked. Once the tilt level arrived 5° degrees regardless of the direction the back off function was activated and the Tx power was reduced. All positions above 5° degrees as well as all positions with the display turned upwards resulted with the same constant power reduction.

The picture shows the setup for the verification.

Device cradle for conducted measurements  
 DASY device holder for notebooks  
 Inclinometer with 0.1° resolution

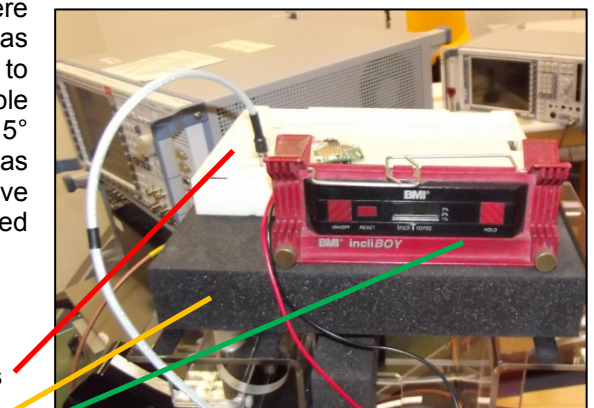

## 7.2 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200 was used. The output power was measured using an integrated RF connector and attached RF cable. The conducted output power was also checked before and after each SAR measurement. The resulting power values were within a 0.2 dB tolerance of the values shown below.

Note: CMU200 measures GSM peak and average output power for active timeslots.

For SAR the time based average power is relevant. The difference in-between depends on the duty cycle of the TDMA signal:

| <b>No. of timeslots</b>                              | <b>1</b> | <b>2</b> | <b>3</b>  | <b>4</b> |
|------------------------------------------------------|----------|----------|-----------|----------|
| Duty Cycle                                           | 1 : 8    | 1 : 4    | 1 : 2.66  | 1 : 2    |
| time based avg. power compared to slotted avg. power | - 9 dB   | - 6 dB   | - 4.25 dB | - 3 dB   |

The signalling modes differ as follows :

| <b>mode</b>  | <b>coding scheme</b> | <b>modulation</b> |
|--------------|----------------------|-------------------|
| GPRS         | CS1 to CS4           | GMSK              |
| EGPRS (EDGE) | MCS1 to MCS4         | GMSK              |
| EGPRS (EDGE) | MCS5 to MCS9         | 8PSK              |

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

### 7.2.1 Conducted power measurements GSM 850 MHz

| Channel / frequency | modulation | timeslots | slotted avg. Power (dBm) |          |       | calculated time based avg. Power (dBm) |          |
|---------------------|------------|-----------|--------------------------|----------|-------|----------------------------------------|----------|
|                     |            |           | full                     | back off | diff. | full                                   | back off |
| 128 / 824.2 MHz     | GMSK       | 1         | 33.4                     | 27.6     | 5.8   | 24.4                                   | 18.6     |
| 190 / 836.6 MHz     | GMSK       | 1         | 33.3                     | 27.6     | 5.7   | 24.3                                   | 18.6     |
| 251 / 848.0 MHz     | GMSK       | 1         | 33.4                     | 27.6     | 5.8   | 24.4                                   | 18.6     |
| 128 / 824.2 MHz     | GMSK       | 2         | 30.7                     | 25.8     | 4.9   | 24.7                                   | 19.8     |
| 190 / 836.6 MHz     | GMSK       | 2         | 30.6                     | 25.5     | 5.1   | 24.6                                   | 19.5     |
| 251 / 848.0 MHz     | GMSK       | 2         | 30.5                     | 25.4     | 5.1   | 24.5                                   | 19.4     |
| 128 / 824.2 MHz     | GMSK       | 3         | 28.9                     | 23.5     | 5.4   | 24.65                                  | 19.25    |
| 190 / 836.6 MHz     | GMSK       | 3         | 28.7                     | 23.4     | 5.3   | 24.45                                  | 19.15    |
| 251 / 848.0 MHz     | GMSK       | 3         | 28.7                     | 23.4     | 5.3   | 24.45                                  | 19.15    |
| 128 / 824.2 MHz     | GMSK       | 4         | 27.8                     | 22.8     | 5.0   | 24.8                                   | 19.8     |
| 190 / 836.6 MHz     | GMSK       | 4         | 27.8                     | 22.6     | 5.2   | 24.8                                   | 19.6     |
| 251 / 848.0 MHz     | GMSK       | 4         | 27.8                     | 22.6     | 5.2   | 24.8                                   | 19.6     |
| 128 / 824.2 MHz     | 8PSK       | 1         | 27.7                     | 27.5     | 0.2   | 18.7                                   | 18.5     |
| 190 / 836.6 MHz     | 8PSK       | 1         | 27.7                     | 27.4     | 0.3   | 18.7                                   | 18.4     |
| 251 / 848.0 MHz     | 8PSK       | 1         | 27.7                     | 27.4     | 0.3   | 18.7                                   | 18.4     |
| 128 / 824.2 MHz     | 8PSK       | 2         | 26.0                     | 25.8     | 0.2   | 20.0                                   | 19.8     |
| 190 / 836.6 MHz     | 8PSK       | 2         | 25.9                     | 25.6     | 0.3   | 19.9                                   | 19.6     |
| 251 / 848.0 MHz     | 8PSK       | 2         | 25.9                     | 25.6     | 0.3   | 19.9                                   | 19.6     |
| 128 / 824.2 MHz     | 8PSK       | 3         | 24.8                     | 24.6     | 0.2   | 20.55                                  | 20.35    |
| 190 / 836.6 MHz     | 8PSK       | 3         | 24.7                     | 24.5     | 0.2   | 20.45                                  | 20.25    |
| 251 / 848.0 MHz     | 8PSK       | 3         | 24.7                     | 24.5     | 0.2   | 20.45                                  | 20.25    |
| 128 / 824.2 MHz     | 8PSK       | 4         | 22.9                     | 22.7     | 0.2   | 19.9                                   | 19.7     |
| 190 / 836.6 MHz     | 8PSK       | 4         | 22.8                     | 22.6     | 0.2   | 19.8                                   | 19.6     |
| 251 / 848.0 MHz     | 8PSK       | 4         | 22.8                     | 22.7     | 0.1   | 19.8                                   | 19.7     |

Table 11: Test results conducted power measurement GSM 850 MHz

### 7.2.2 Conducted power measurements GSM 1900 MHz

| Channel / frequency | modulation  | timeslots | slotted avg. Power (dBm) |          |       | calculated time based avg. Power (dBm) |             |
|---------------------|-------------|-----------|--------------------------|----------|-------|----------------------------------------|-------------|
|                     |             |           | full                     | back off | diff. | full                                   | back off    |
| 512 / 1850.2 MHz    | GMSK        | 1         | 30.4                     | 25.0     | 5.4   | 21.4                                   | 16.0        |
| 661 / 1880.0 MHz    | GMSK        | 1         | 30.2                     | 25.0     | 5.2   | 21.2                                   | 16.0        |
| 810 / 1909.8 MHz    | GMSK        | 1         | 30.5                     | 25.1     | 5.4   | 21.5                                   | 16.1        |
| 512 / 1850.2 MHz    | GMSK        | 2         | 27.2                     | 22.3     | 4.9   | 21.2                                   | 16.3        |
| 661 / 1880.0 MHz    | GMSK        | 2         | 27.0                     | 22.3     | 4.7   | 21.0                                   | 16.3        |
| 810 / 1909.8 MHz    | GMSK        | 2         | 27.1                     | 22.4     | 4.7   | 21.1                                   | 16.4        |
| 512 / 1850.2 MHz    | GMSK        | 3         | 26.3                     | 21.2     | 5.1   | 22.05                                  | 16.95       |
| 661 / 1880.0 MHz    | GMSK        | 3         | 26.2                     | 21.3     | 4.9   | 21.95                                  | 17.05       |
| 810 / 1909.8 MHz    | GMSK        | 3         | 26.3                     | 21.3     | 5.0   | 22.05                                  | 17.05       |
| 512 / 1850.2 MHz    | GMSK        | 4         | 25.3                     | 20.2     | 5.1   | 22.3                                   | 17.2        |
| 661 / 1880.0 MHz    | GMSK        | 4         | 25.1                     | 20.1     | 5.0   | 22.1                                   | 17.1        |
| 810 / 1909.8 MHz    | GMSK        | 4         | 25.4                     | 20.1     | 5.3   | 22.4                                   | 17.1        |
| 512 / 1850.2 MHz    | 8PSK        | 1         | 26.8                     | 25.7     | 1.1   | 17.8                                   | 16.7        |
| 661 / 1880.0 MHz    | 8PSK        | 1         | 26.5                     | 25.6     | 0.9   | 17.5                                   | 16.6        |
| 810 / 1909.8 MHz    | 8PSK        | 1         | 26.6                     | 25.8     | 0.8   | 17.6                                   | 16.8        |
| 512 / 1850.2 MHz    | 8PSK        | 2         | 24.8                     | 22.6     | 2.2   | 18.8                                   | 16.6        |
| 661 / 1880.0 MHz    | 8PSK        | 2         | 24.6                     | 22.4     | 2.2   | 18.6                                   | 16.4        |
| 810 / 1909.8 MHz    | 8PSK        | 2         | 24.7                     | 22.5     | 2.2   | 18.7                                   | 16.5        |
| 512 / 1850.2 MHz    | 8PSK        | 3         | 23.9                     | 21.5     | 2.4   | 19.65                                  | 17.25       |
| 661 / 1880.0 MHz    | 8PSK        | 3         | 23.7                     | 21.4     | 2.3   | 19.45                                  | 17.15       |
| 810 / 1909.8 MHz    | 8PSK        | 3         | 23.8                     | 21.6     | 2.2   | 19.55                                  | 17.35       |
| 512 / 1850.2 MHz    | <b>8PSK</b> | <b>4</b>  | 22.7                     | 20.6     | 2.1   | 19.7                                   | <b>17.6</b> |
| 661 / 1880.0 MHz    | <b>8PSK</b> | <b>4</b>  | 22.6                     | 20.5     | 2.1   | 19.6                                   | <b>17.5</b> |
| 810 / 1909.8 MHz    | <b>8PSK</b> | <b>4</b>  | 22.6                     | 20.7     | 1.9   | 19.6                                   | <b>17.7</b> |

Table 12: Test results conducted power measurement GSM 1900 MHz

### 7.2.3 Justification of SAR measurements in GSM mode

SAR measurements were performed in the configuration with highest calculated time based averaged output power.

## 7.2.4 Conducted power measurements UMTS FDD V (850 MHz)

| mode                    | Max. RMS output power UMTS 850 MHz (FDD V) / dBm |             |       |                     |             |       |                  |             |       |
|-------------------------|--------------------------------------------------|-------------|-------|---------------------|-------------|-------|------------------|-------------|-------|
|                         | 4132 / 826.4 MHz                                 |             |       | Channel / frequency |             |       | 4233 / 846.6 MHz |             |       |
|                         | full                                             | back off    | diff. | full                | back off    | diff. | full             | back off    | diff. |
| <b>RMC 12.2 kbit/s</b>  | <b>22.5</b>                                      | <b>19.4</b> | 3.1   | <b>22.8</b>         | <b>19.7</b> | 3.1   | <b>22.5</b>      | <b>19.4</b> | 3.1   |
| RMC 64 kbit/s           | 22.5                                             | 19.3        | 3.2   | 22.8                | 19.7        | 3.1   | 22.4             | 19.3        | 3.1   |
| RMC 144 kbit/s          | 22.5                                             | 19.4        | 3.1   | 22.8                | 19.7        | 3.1   | 22.4             | 19.4        | 3.0   |
| RMC 384 kbit/s          | 22.5                                             | 19.3        | 3.2   | 22.8                | 19.6        | 3.2   | 22.5             | 19.3        | 3.2   |
| <b>HSDPA Sub test 1</b> | <b>22.5</b>                                      | <b>19.4</b> | 3.1   | <b>22.8</b>         | <b>19.7</b> | 3.1   | <b>22.4</b>      | <b>19.3</b> | 3.1   |
| HSDPA Sub test 2        | 21.1                                             | 18.0        | 3.1   | 21.4                | 18.3        | 3.1   | 21.1             | 18.0        | 3.1   |
| HSDPA Sub test 3        | 20.0                                             | 16.5        | 3.5   | 20.2                | 16.7        | 3.5   | 20.0             | 16.6        | 3.4   |
| HSDPA Sub test 4        | 19.3                                             | 16.4        | 2.9   | 19.8                | 16.5        | 3.3   | 19.3             | 16.4        | 2.9   |
| HSUPA Sub test 1        | 22.1                                             | 18.2        | 3.9   | 22.1                | 19.2        | 2.9   | 22.2             | 19.0        | 3.2   |
| HSUPA Sub test 2        | 20.4                                             | 18.1        | 2.3   | 21.3                | 18.3        | 3.0   | 20.5             | 18.1        | 2.4   |
| HSUPA Sub test 3        | 21.6                                             | 18.5        | 3.1   | 22.2                | 18.8        | 3.4   | 21.4             | 18.3        | 3.1   |
| HSUPA Sub test 4        | 20.2                                             | 18.4        | 1.8   | 20.2                | 18.4        | 1.8   | 19.8             | 18.3        | 1.5   |
| <b>HSUPA Sub test 5</b> | <b>22.2</b>                                      | <b>18.5</b> | 3.7   | <b>22.1</b>         | <b>19.3</b> | 2.8   | <b>22.2</b>      | <b>18.8</b> | 3.4   |

Table 13: Test results conducted power measurement UMTS FDD V 850MHz

Remark: None of the HSDPA/HSUPA settings leads to conducted power values exceeding the conducted power in RMC mode by more than 0.25 dB.

## 7.2.5 Test-set-up information for WCDMA / HSPDA / HSUPA

### a) WCDMA RMC

In RMC (reference measurement channel) mode the conducted power at 4 different bit rates was measured. They correspond with the used spreading factors as follows:

| Bit rate              | 12.2 kbit/s | 64 kbit/s | 144 kbit/s | 384 kbit/s |
|-----------------------|-------------|-----------|------------|------------|
| Spreading factor (SF) | 64          | 16        | 8          | 4          |

In RMC mode only DPCCH and DPDCH are active. As bit rate changes do not influence the relative power of any code channel the measured RMS output power remains on the same level which is set to maximum by TPC (Transmit power control) pattern type 'All 1'.

### b) HSDPA

HSDPA adds the HS-DPCCH in uplink as a control channel for high speed data transfer in downlink. In HSDPA mode 4 sub-tests are defined by 3GPP 34.121 according to the following table:

| Sub-test | $\beta_c$            | $\beta_d$            | $\beta_d$ (SF) | $\beta_c/\beta_d$    | $\beta_{hs}^{(1)}$ | CM(dB) <sup>(2)</sup> |
|----------|----------------------|----------------------|----------------|----------------------|--------------------|-----------------------|
| 1        | 2/15                 | 15/15                | 64             | 2/15                 | 4/15               | 0.0                   |
| 2        | 12/15 <sup>(3)</sup> | 15/15 <sup>(3)</sup> | 64             | 12/15 <sup>(3)</sup> | 24/15              | 1.0                   |
| 3        | 15/15                | 8/15                 | 64             | 15/8                 | 30/15              | 1.5                   |
| 4        | 15/15                | 4/15                 | 64             | 15/4                 | 30/15              | 1.5                   |

Note 1:  $\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI} = 8 \iff A_{hs} = \beta_{hs}/\beta_c = 30/15 \iff \beta_{hs} = 30/15 * \beta_c$

Note 2 : CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$

Note 3 : For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$

Table 14: Sub-tests for UMTS Release 5 HSDPA

The  $\beta_c$  and  $\beta_d$  gain factors for DPCCH and DPDCH were set according to the values in the above table,  $\beta_{hs}$  for HS-DPCCH is set automatically to the correct value when  $\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI} = 8$ . The variation of the  $\beta_c/\beta_d$  ratio causes a power reduction at sub-tests 2 - 4.

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

| Parameter                        | Value       |
|----------------------------------|-------------|
| Nominal average inf. bit rate    | 534 kbit/s  |
| Inter-TTI Distance               | 3 TTI's     |
| Number of HARQ Processes         | 2 Processes |
| Information Bit Payload          | 3202 Bits   |
| MAC-d PDU size                   | 336 Bits    |
| Number Code Blocks               | 1 Block     |
| Binary Channel Bits Per TTI      | 4800 Bits   |
| Total Available SMLs in UE       | 19200 SMLs  |
| Number of SMLs per HARQ Process  | 9600 SMLs   |
| Coding Rate                      | 0.67        |
| Number of Physical Channel Codes | 5           |

Table 15: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

## c) HSUPA

In HSUPA mode additional code channels (E-DPCCH, E-DPDCHn) are added for data transfer in uplink at higher bit rates.

5 sub-tests are defined by 3GPP 34.121 according to the following table :

| Sub-test | $\beta_c$            | $\beta_d$            | $\beta_d$ (SF) | $\beta_c/\beta_d$    | $\beta_{hs}^{(1)}$ | $\beta_{ec}$ | $\beta_{ed}$                               | $\beta_{ec}$ (SF) | $\beta_{ed}$ (code) | CM <sup>(2)</sup> (dB) | MPR (dB) | AG <sup>(4)</sup> Index | E-TFCI |
|----------|----------------------|----------------------|----------------|----------------------|--------------------|--------------|--------------------------------------------|-------------------|---------------------|------------------------|----------|-------------------------|--------|
| 1        | 11/15 <sup>(3)</sup> | 15/15 <sup>(3)</sup> | 64             | 11/15 <sup>(3)</sup> | 22/15              | 209/225      | 1039/225                                   | 4                 | 1                   | 1.0                    | 0.0      | 20                      | 75     |
| 2        | 6/15                 | 15/15                | 64             | 6/15                 | 12/15              | 12/15        | 94/75                                      | 4                 | 1                   | 3.0                    | 2.0      | 12                      | 67     |
| 3        | 15/15                | 9/15                 | 64             | 15/9                 | 30/15              | 30/15        | $\beta_{ed1}:47/15$<br>$\beta_{ed2}:47/15$ | 4                 | 2                   | 2.0                    | 1.0      | 15                      | 92     |
| 4        | 2/15                 | 15/15                | 64             | 2/15                 | 4/15               | 2/15         | 56/75                                      | 4                 | 1                   | 3.0                    | 2.0      | 17                      | 71     |
| 5        | 15/15 <sup>(4)</sup> | 15/15 <sup>(4)</sup> | 64             | 15/15 <sup>(4)</sup> | 30/15              | 24/15        | 134/15                                     | 4                 | 1                   | 1.0                    | 0.0      | 21                      | 81     |

Note 1 :  $\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI} = 8 \iff A_{hs} = \beta_{hs}/\beta_c = 30/15 \iff \beta_{hs} = 30/15 * \beta_c$   
Note 2 : CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference  
Note 3 : For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$   
Note 4 : For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$   
Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g  
Note 6 :  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value

Table 16: Subtests for UMTS Release 6 HSUPA

To achieve the settings above some additional procedures were defined by 3GPP 34.121. Those have been included in an application note for the CMU200 and were exactly followed :

- Test mode connection (BS signal tab) :
- RMC 12.2 kbit/s + HSPA 34.108 with loop mode 1
- HS-DSCH settings (BS signal tab):
- FRC with H-set 1 QPSK
- ACK-NACK repetition factor = 3
- CQI feedback cycle = 4ms
- CQI repetition factor = 2
- HSUPA-specific signalling settings (UE signal tab) :
- E-TFCI table index = 0
- E-DCH minimum set E-TFCI = 9
- Puncturing limit non-max = 0.84
- max. number of channelisation codes = 2x SF4
- Initial Serving Grant Value = Off
- HSDPA and HSUPA Gain factors (UE signal tab)

| Sub-test | $\beta_c$ | $\beta_d$ | $\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI}$ | $\Delta E-DPCCH$ )* |
|----------|-----------|-----------|---------------------------------------------|---------------------|
| 1        | 10        | 15        | 8                                           | 6                   |
| 2        | 6         | 15        | 8                                           | 8                   |
| 3        | 15        | 9         | 8                                           | 8                   |
| 4        | 2         | 15        | 8                                           | 5                   |
| 5        | 14        | 15        | 8                                           | 7                   |

)\* :  $\beta_{ec}$  and  $\beta_{ed}$  ratios (relative to  $\beta_c$  and  $\beta_d$ ) are set by  $\Delta E-DPCCH$

- HSUPA Reference E-TFCIs (UE signal tab > HSUPA gain factors) :

| <b>Sub-test</b>               | <b>1, 2, 4, 5</b> |    |    |    |    |
|-------------------------------|-------------------|----|----|----|----|
| Number of E-TFCIs             | 5                 |    |    |    |    |
| Reference E-TFCI              | 11                | 67 | 71 | 75 | 81 |
| Reference E-TFCI power offset | 4                 | 18 | 23 | 26 | 27 |

| <b>Sub-test</b>               | <b>3</b> |    |
|-------------------------------|----------|----|
| Number of E-TFCIs             | 2        |    |
| Reference E-TFCI              | 11       | 92 |
| Reference E-TFCI power offset | 4        | 18 |

- HSUPA-specific generator parameters (BS Signal tab > HSUPA > E-AGCH > AG Pattern)

| <b>Sub-test</b> | <b>Absolute Grant Value (AG Index)</b> |
|-----------------|----------------------------------------|
| 1               | 20                                     |
| 2               | 12                                     |
| 3               | 15                                     |
| 4               | 17                                     |
| 5               | 21                                     |

- Power Level settings (BS Signal tab > Node B-settings):

- Level reference : Output Channel Power (Ior)

- Output Channel Power (Ior) : -86 dBm

- Downlink Physical Channel Settings (BS signal tab)

- P-CPICH : -10 dB

- S-CPICH : Off

- P-SCH : -15 dB

- S-SCH : -15 dB

- P-CCPCH : -12 dB

- S-CCPCH : -12 dB

- PICH : -15 dB

- AICH : -12 dB

- DPDCH : -10 dB

- HS-SCCH : -8 dB

- HS-PDSCH : -3 dB

- E-AGCH : -20 dB

- E-RGCH/E-HICH - 20 dB

- E-RGCH Active : Off

The settings above were stored once for each sub-test and recalled before the measurement.

HSUPA test procedure :

To reach maximum output power in HSUPA mode the following procedures were followed:

3 different TPC patterns were defined :

Set 1 : Closed loop with target power 10 dBm

Set 2 : Single Pattern+Alternating with binary pattern '11111' for 1 dB steps 'up'

Set 3 : Single Pattern+Alternating with binary pattern '00000' for 1 dB steps 'down'

After recalling a certain HSUPA sub-test the HSUPA E-AGCH graph with E-TFCI event counter is displayed. After starting with the closed loop command the power is increased in 1 dB steps by activating pattern set 2 until the UE decreases the transmitted E-TFCI.

At this point set 3 is activated once to reduce the output power to the value at which the original E-TFCI, which is required for the sub-test, appears again.

For conducted power measurements the same steps are repeated in the power menu to read out the corresponding maximum RMS output power with the target E-TFCI.

For SAR measurements it is useful to switch to Code Domain Power vs. Time display.

Here the CMU200 shows relative power values (max. and min.) of each code channel which should roughly correspond to the numerators of the gain factors e.g. :

| Sub-test | $\beta_c$ | $\beta_d$ | $\beta_{hs}$ | $\beta_{ec}$ | $\beta_{ed}$ |
|----------|-----------|-----------|--------------|--------------|--------------|
| 5        | 15        | 15        | 30           | 24           | 134          |

By this way a surveillance of signalling conditions is possible to make sure that HSUPA code channels are active during the complete SAR measurement.

## 7.2.6 Conducted power measurements WLAN 2.4 GHz

| Channel / frequency | modulation | bit rate   | time based avg. power |
|---------------------|------------|------------|-----------------------|
| 1 / 2412 MHz        | CCK        | 1 MBit/s   | <b>10.8dBm</b>        |
| 6 / 2437 MHz        | CCK        | 1 MBit/s   | <b>11.4dBm</b>        |
| 11 / 2462 MHz       | CCK        | 1 MBit/s   | <b>10.5dBm</b>        |
| 13 / 2472 MHz       | CCK        | 1 MBit/s   | <b>10.3dBm</b>        |
| 1 / 2412 MHz        | OFDM       | 6 MBit/s   | 9.4dBm                |
| 6 / 2437 MHz        | OFDM       | 6 MBit/s   | 9.5dBm                |
| 11 / 2462 MHz       | OFDM       | 6 MBit/s   | 9.7dBm                |
| 13 / 2472 MHz       | OFDM       | 6 MBit/s   | 10.1dBm               |
| 1 / 2412 MHz        | OFDM       | 6.5 MBit/s | 9.4dBm                |
| 6 / 2437 MHz        | OFDM       | 6.5 MBit/s | 8.3dBm                |
| 11 / 2462 MHz       | OFDM       | 6.5 MBit/s | 8.8dBm                |
| 13 / 2472 MHz       | OFDM       | 6.5 MBit/s | 9.5dBm                |

Table 17: Test results conducted power measurement WLAN 2.4 GHz

## 7.2.7 Conducted power measurements WLAN 5 GHz

| Channel | Frequency (MHz) | modulation | bit rate | time based avg. power |
|---------|-----------------|------------|----------|-----------------------|
| 36      | 5180            | OFDM       | 6 MBit/s | <b>9.0dBm</b>         |
| 40      | 5200            | OFDM       | 6 MBit/s | 8.5dBm                |
| 44      | 5220            | OFDM       | 6 MBit/s | 8.5dBm                |
| 48      | 5240            | OFDM       | 6 MBit/s | 8.6dBm                |
| 52      | 5260            | OFDM       | 6 MBit/s | <b>8.6dBm</b>         |
| 56      | 5280            | OFDM       | 6 MBit/s | 8.6dBm                |
| 60      | 5300            | OFDM       | 6 MBit/s | 8.6dBm                |
| 64      | 5320            | OFDM       | 6 MBit/s | 8.5dBm                |
| 100     | 5500            | OFDM       | 6 MBit/s | 6.9dBm                |
| 104     | 5520            | OFDM       | 6 MBit/s | 6.7dBm                |
| 108     | 5540            | OFDM       | 6 MBit/s | 7.3dBm                |
| 112     | 5560            | OFDM       | 6 MBit/s | <b>7.4dBm</b>         |
| 116     | 5580            | OFDM       | 6 MBit/s | 7.3dBm                |
| 120     | 5600            | OFDM       | 6 MBit/s | 7.4dBm                |
| 124     | 5620            | OFDM       | 6 MBit/s | 7.2dBm                |
| 128     | 5640            | OFDM       | 6 MBit/s | 7.1dBm                |
| 132     | 5660            | OFDM       | 6 MBit/s | 6.8dBm                |
| 136     | 5680            | OFDM       | 6 MBit/s | 6.9dBm                |
| 140     | 5700            | OFDM       | 6 MBit/s | 7.0dBm                |
| 149     | 5745            | OFDM       | 6 MBit/s | <b>9.3dBm</b>         |
| 153     | 5765            | OFDM       | 6 MBit/s | 8.7dBm                |
| 157     | 5785            | OFDM       | 6 MBit/s | 8.9dBm                |
| 161     | 5805            | OFDM       | 6 MBit/s | 9.0dBm                |
| 165     | 5825            | OFDM       | 6 MBit/s | 9.2dBm                |

Table 18: Test results conducted power measurement WLAN 5 GHz

## 7.2.8 Standalone SAR Test Exclusion

| Standalone SAR test exclusion considerations |             |                          |                         |                                           |                    |
|----------------------------------------------|-------------|--------------------------|-------------------------|-------------------------------------------|--------------------|
| Communication system                         | freq. (MHz) | P <sub>avg</sub> * (dBm) | P <sub>avg</sub> * (mW) | threshold <sub>1-g</sub> comparison value | SAR test exclusion |
| GSM 850                                      | 835         | 20.8                     | 118.9                   | 21.7                                      | no                 |
| GSM 1900                                     | 1900        | 17.7                     | 58.9                    | 16.2                                      | no                 |
| FDD V 850                                    | 835         | 19.7                     | 93.3                    | 17.1                                      | no                 |
| WLAN 2450                                    | 2450        | 11.5                     | 14.1                    | 4.4                                       | no                 |
| WLAN 5 GHz                                   | 5200        | 9.5                      | 8.9                     | 4.1                                       | no                 |
| Bluetooth 2450                               | 2450        | 9.8                      | 9.5                     | 3.0                                       | yes                |

Table 19: Standalone SAR test exclusion considerations

The **1-g SAR test exclusion thresholds** for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot \sqrt{f(\text{GHz})} \leq 3.0$  for 1-g SAR, where:

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion

\* - maximum possible output power declared by manufacturer

## 7.2.9 Multiple Transmitter Information


The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v05.

Minimum antenna separation distance between MAIN antenna and WLAN antenna – 228.765 mm

| reported SAR <b>WWAN</b> and <b>WLAN 2.4GHz</b> , $\Sigma$ SAR evaluation, <b>SPLSR<sub>i</sub></b> |          |                    |       |                          |                                 |                  |
|-----------------------------------------------------------------------------------------------------|----------|--------------------|-------|--------------------------|---------------------------------|------------------|
| Frequency band                                                                                      | Position | reported SAR /W/kg |       | $\Sigma$ SAR<br><1.6W/kg | distance<br>R <sub>i</sub> , mm | ratio<br>≤ 0.040 |
|                                                                                                     |          | WWAN               | WLAN  |                          |                                 |                  |
| GSM 850                                                                                             | rear     | 1.436              | 1.284 | <b>2.720</b>             | 242.2                           | 0.019            |
| GSM 1900                                                                                            | rear     | 0.954              | 1.284 | <b>2.238</b>             | 236.5                           | 0.014            |
| WCDMA FDD V                                                                                         | rear     | 1.210              | 1.284 | <b>2.494</b>             | 240.7                           | 0.016            |

Table 20: SAR<sub>max</sub> WWAN and **WLAN 2.4GHz**,  $\Sigma$ SAR evaluation, **SPLSR<sub>i</sub>**

The separation distance between the peak SAR locations for the antenna pair exported from DASY5 (see Annex A.6):

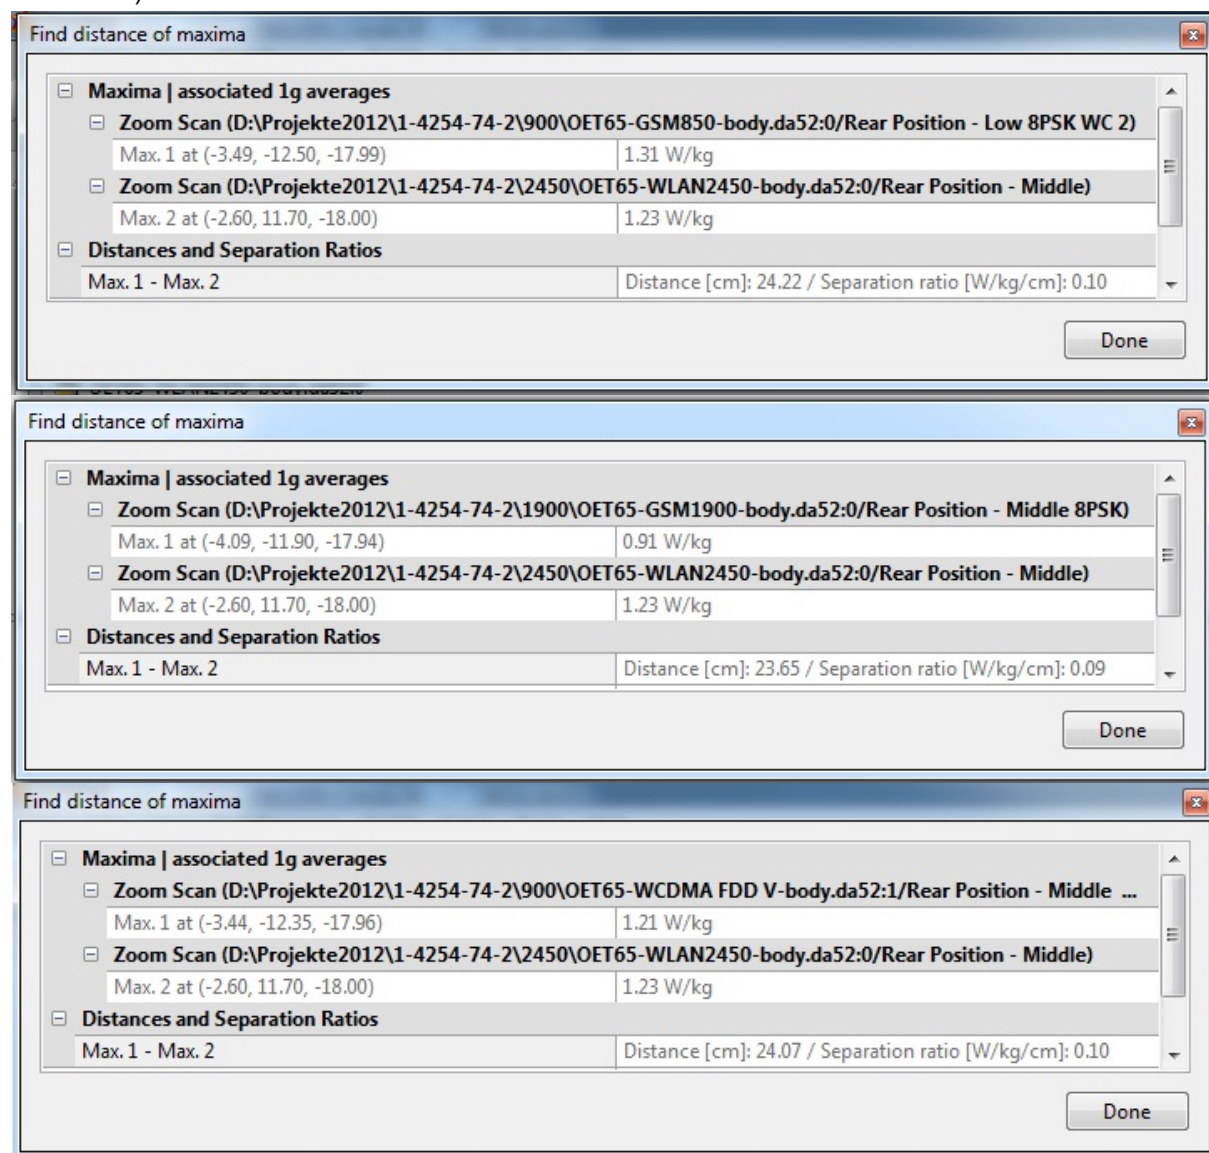


The following tables represent the data shown in the three screenshots of the 'Find distance of maxima' dialog box:

| Maxima   associated 1g averages                                                                      | Max. 1 at (x, y, z)     | Max. 2 at (x, y, z)    | Distance [cm] | Separation ratio [W/kg/cm] |
|------------------------------------------------------------------------------------------------------|-------------------------|------------------------|---------------|----------------------------|
| Zoom Scan (D:\Projekte2012\1-4254-74-2\900\OET65-GSM850-body.da52:0/Rear Position - Low 8PSK WC 2)   | (-3.49, -12.50, -17.99) | (-2.60, 11.70, -18.00) | 24.22         | 0.10                       |
| Zoom Scan (D:\Projekte2012\1-4254-74-2\2450\OET65-WLAN2450-body.da52:0/Rear Position - Middle)       | (-2.60, 11.70, -18.00)  | (-2.60, 11.70, -18.00) | 23.65         | 0.09                       |
| Zoom Scan (D:\Projekte2012\1-4254-74-2\900\OET65-WCDMA FDD V-body.da52:1/Rear Position - Middle ...) | (-3.44, -12.35, -17.96) | (-2.60, 11.70, -18.00) | 24.07         | 0.10                       |

| reported SAR <b>WWAN</b> and <b>WLAN 5GHz</b> , $\Sigma$ SAR evaluation, <b>SPLSR<sub>i</sub></b> |          |                    |       |                          |                                 |                  |
|---------------------------------------------------------------------------------------------------|----------|--------------------|-------|--------------------------|---------------------------------|------------------|
| Frequency band                                                                                    | Position | reported SAR /W/kg |       | $\Sigma$ SAR<br><1.6W/kg | distance<br>R <sub>i</sub> , mm | ratio<br>≤ 0.040 |
|                                                                                                   |          | WWAN               | WLAN  |                          |                                 |                  |
| GSM 850                                                                                           | rear     | 1.436              | 0.953 | <b>2.389</b>             | 240.9                           | 0.015            |
| GSM 1900                                                                                          | rear     | 0.954              | 0.953 | <b>1.907</b>             | 234.8                           | 0.011            |
| WCDMA FDD V                                                                                       | rear     | 1.210              | 0.953 | <b>2.163</b>             | 239.4                           | 0.013            |

Table 21: SAR<sub>max</sub> WWAN and **WLAN 5GHz**,  $\Sigma$ SAR evaluation, **SPLSR<sub>i</sub>**

The separation distance between the peak SAR locations for the antenna pair exported from DASY5 (see Annex A.6):

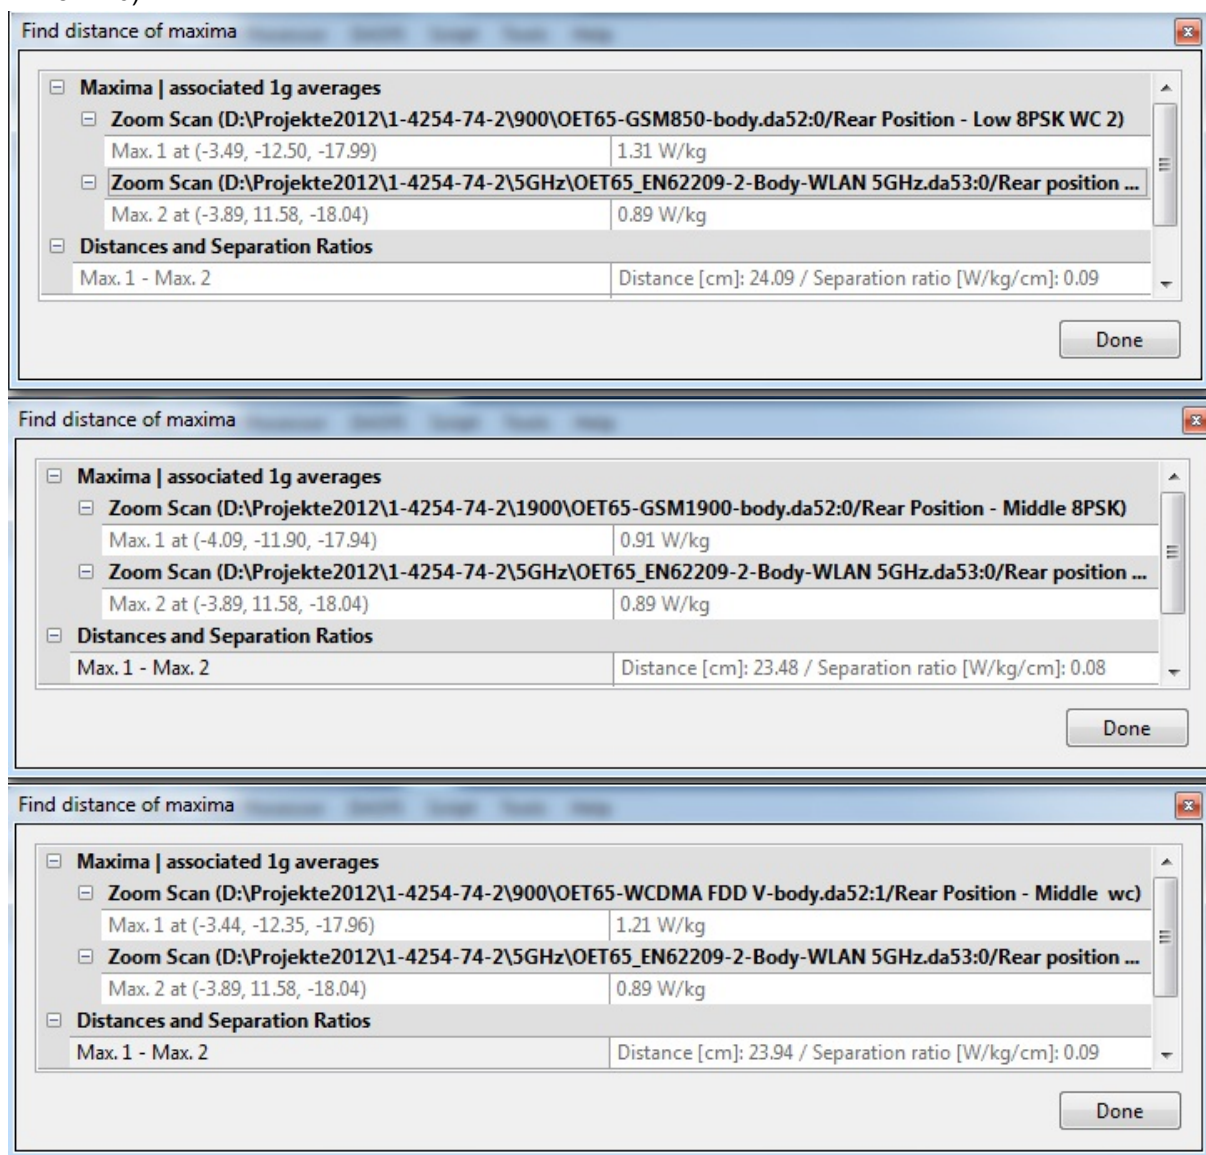

The following table summarizes the data shown in the three screenshots of the 'Find distance of maxima' dialog box:

| Frequency Band | Position | Max. 1 Location (x, y, z) | Max. 1 SAR (W/kg) | Max. 2 Location (x, y, z) | Max. 2 SAR (W/kg) | Distance [cm] | Separation ratio [W/kg/cm] |
|----------------|----------|---------------------------|-------------------|---------------------------|-------------------|---------------|----------------------------|
| GSM 850        | rear     | (-3.49, -12.50, -17.99)   | 1.31              | (-3.89, 11.58, -18.04)    | 0.89              | 24.09         | 0.09                       |
| GSM 1900       | rear     | (-4.09, -11.90, -17.94)   | 0.91              | (-3.89, 11.58, -18.04)    | 0.89              | 23.48         | 0.08                       |
| WCDMA FDD V    | rear     | (-3.44, -12.35, -17.96)   | 1.21              | (-3.89, 11.58, -18.04)    | 0.89              | 23.94         | 0.09                       |

| reported SAR <b>WWAN</b> and <b>Bluetooth 2.4GHz</b> , $\Sigma$ SAR evaluation, <b>SPLSR<sub>i</sub></b> |          |                    |       |                          |                                  |                  |
|----------------------------------------------------------------------------------------------------------|----------|--------------------|-------|--------------------------|----------------------------------|------------------|
| Frequency band                                                                                           | Position | reported SAR /W/kg |       | $\Sigma$ SAR<br><1.6W/kg | distance*<br>R <sub>i</sub> , mm | ratio<br>≤ 0.040 |
|                                                                                                          |          | WWAN               | BT*   |                          |                                  |                  |
| GSM 850                                                                                                  | rear     | 1.436              | 0.399 | <b>1.835</b>             | 228.8                            | 0.011            |
| GSM 1900                                                                                                 | rear     | 0.954              | 0.399 | 1.353                    | 228.8                            | 0.007            |
| WCDMA FDD V                                                                                              | rear     | 1.210              | 0.399 | <b>1.609</b>             | 228.8                            | 0.009            |

Table 22: SAR<sub>max</sub> WWAN and **Bluetooth 2450MHz**,  $\Sigma$ SAR evaluation, **SPLSR<sub>i</sub>**

BT\* - estimated SAR (see the table below)

distance\* - the closest physical separation of the antennas

Minimum antenna separation distance between MAIN antenna and WLAN antenna – 228.765 mm

When the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion. The **ratio** is determined by  $(\text{SAR}_1 + \text{SAR}_2)^{1.5}/R_i$ , rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion. **SAR<sub>1</sub>** and **SAR<sub>2</sub>** are the highest **reported** SAR for each antenna in the pair, and **R<sub>i</sub>** is the separation distance between the peak SAR locations for the antenna pair in mm.

| Estimated SAR        |             |               |                          |                         |                                 |
|----------------------|-------------|---------------|--------------------------|-------------------------|---------------------------------|
| Communication system | freq. (GHz) | distance (mm) | P <sub>avg</sub> * (dBm) | P <sub>avg</sub> * (mW) | estimated <sub>1-g</sub> (W/kg) |
| Bluetooth 2450 body  | 2.45        | 5             | 9.8                      | 9.5                     | 0.399                           |

Table 23: Calculated SAR<sub>max</sub> for **Bluetooth 2450MHz** head and body

\* - maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including **tune-up tolerance**, mW)/(min. test separation distance, mm)]·[√f(GHz)/x]  
W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR.


When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

### Conclusion:

$\Sigma$ SAR > 1.6 W/kg, but SAR-to-(peak-locations spacing) **ratio** (**SPLSR<sub>i</sub>**) is less than **0.04** therefore simultaneous transmissions SAR with Volume Scans is **not** required.

### 7.2.10 SAR measurement positions

| SAR measurement positions |       |      |           |            |          |             |
|---------------------------|-------|------|-----------|------------|----------|-------------|
| mode                      | front | rear | left edge | right edge | top edge | bottom edge |
| GSM 850                   | no    | yes  | no        | yes        | yes      | no          |
| GSM 1900                  | no    | yes  | no        | yes        | yes      | no          |
| WCDMA FDD V 850           | no    | yes  | no        | yes        | yes      | no          |
| WLAN 2450                 | no    | yes  | yes       | no         | no       | no          |
| WLAN 5GHz                 | no    | yes  | yes       | no         | no       | no          |

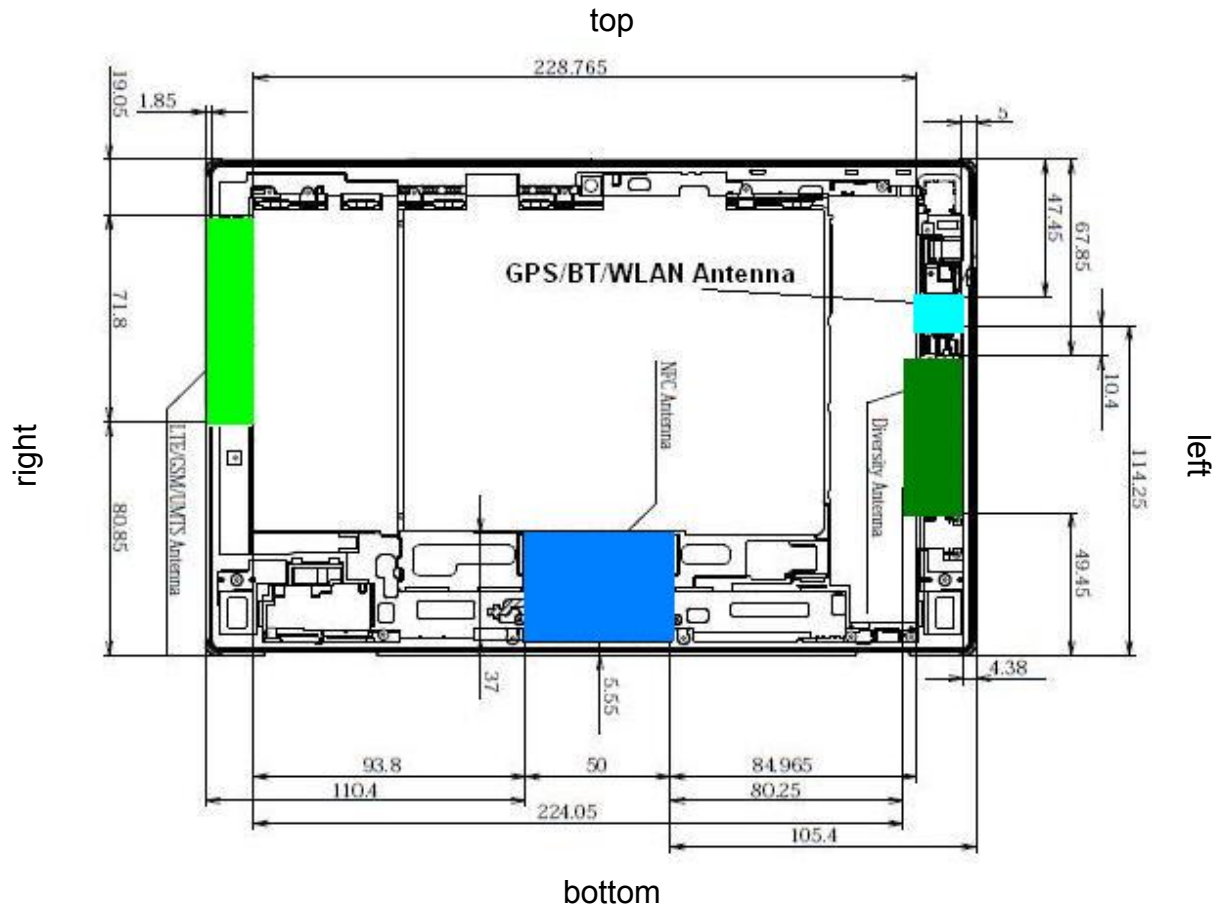

Note:

With 80.85 mm distance of the LTE/GSM/UMTS antenna to the bottom edge and min. 47.45 mm distance of the GPS/WLAN/BT antenna to all adjacent edges SAR test exclusion for adjacent edges is possible according to KDB 447498 D01v05 chapter 4.3.1 2) or Appendix A/B.

| Adjacent edge SAR test exclusion considerations |             |                   |                  |                          |                    |
|-------------------------------------------------|-------------|-------------------|------------------|--------------------------|--------------------|
| Communication system                            | freq. (MHz) | $P_{avg}^*$ (dBm) | $P_{avg}^*$ (mW) | exclusion threshold (mW) | SAR test exclusion |
| GSM 850                                         | 835         | 20.8              | 118.9            | 336.0                    | yes                |
| GSM 1900                                        | 1900        | 17.7              | 58.9             | 417.0                    | yes                |
| FDD V 850                                       | 835         | 19.7              | 93.3             | 336.0                    | yes                |
| WLAN 2450                                       | 2450        | 11.5              | 14.1             | 90.9                     | yes                |
| WLAN 5 GHz                                      | 5200        | 9.5               | 8.9              | 62.4                     | yes                |
| Bluetooth 2450                                  | 2450        | 9.8               | 9.5              | 90.9                     | yes                |

Table 24: Adjacent edge SAR test exclusion considerations

### 7.3 SAR test results

#### 7.3.1 Results overview

| measured / extrapolated SAR numbers - Body - GSM 850 MHz |                |               |                  |              |                          |          |                                 |              |                      |
|----------------------------------------------------------|----------------|---------------|------------------|--------------|--------------------------|----------|---------------------------------|--------------|----------------------|
| Ch.                                                      | freq.<br>(MHz) | time<br>slots | distance<br>(mm) | Position     | cond. output power (dBm) |          | SAR <sub>1g</sub> results(W/kg) |              | liquid temp.<br>(°C) |
|                                                          |                |               |                  |              | declared**               | measured | measured                        | extrapolated |                      |
| Body EGPRS 3TS, <b>8PSK</b>                              |                |               |                  |              |                          |          |                                 |              |                      |
| 128                                                      | 824.2          | 3             | 0                | rear         | 25.0                     | 24.6     | 1.190                           | 1.305        | 20.7                 |
| 190                                                      | 836.6          | 3             | 0                | rear         | 25.0                     | 24.5     | 1.110                           | 1.245        | 20.7                 |
| 251                                                      | 848.8          | 3             | 0                | rear         | 25.0                     | 24.5     | 1.030                           | 1.156        | 20.7                 |
| 190                                                      | 836.6          | 3             | 0                | right edge   | 25.0                     | 24.5     | 0.618                           | 0.693        | 20.7                 |
| 190                                                      | 836.6          | 3             | 0                | top edge     | 25.0                     | 24.5     | 0.149                           | 0.167        | 20.7                 |
| 128                                                      | 824.2          | 3             | 0                | rear*        | 25.0                     | 24.6     | 1.310                           | 1.436        | 20.7                 |
| 128                                                      | 824.2          | 3             | 0                | rear with HS | 25.0                     | 24.6     | 1.220                           | 1.338        | 20.7                 |
| Body GPRS 4TS, <b>GMSK</b>                               |                |               |                  |              |                          |          |                                 |              |                      |
| 128                                                      | 824.2          | 4             | 0                | rear         | 23.0                     | 22.8     | 0.914                           | 0.957        | 20.7                 |
| 190                                                      | 836.6          | 4             | 0                | rear         | 23.0                     | 22.6     | 0.859                           | 0.942        | 20.7                 |
| 251                                                      | 848.8          | 4             | 0                | rear         | 23.0                     | 22.6     | 0.789                           | 0.865        | 20.7                 |
| 190                                                      | 836.6          | 4             | 0                | right edge   | 23.0                     | 22.6     | 0.505                           | 0.554        | 20.7                 |
| 190                                                      | 836.6          | 4             | 0                | top edge     | 23.0                     | 22.6     | 0.130                           | 0.143        | 20.7                 |
| 128                                                      | 824.2          | 4             | 0                | rear*        | 23.0                     | 22.8     | 0.909                           | 0.952        | 20.7                 |

Table 25: Test results body SAR GSM 850 MHz

| measured / extrapolated SAR numbers - Body - GSM 1900 MHz |                |               |                  |            |                          |          |                                 |              |                      |
|-----------------------------------------------------------|----------------|---------------|------------------|------------|--------------------------|----------|---------------------------------|--------------|----------------------|
| Ch.                                                       | freq.<br>(MHz) | time<br>slots | distance<br>(mm) | Position   | cond. output power (dBm) |          | SAR <sub>1g</sub> results(W/kg) |              | liquid<br>temp. (°C) |
|                                                           |                |               |                  |            | declared**               | measured | measured                        | extrapolated |                      |
| Body EGPRS 4TS, <b>8PSK</b>                               |                |               |                  |            |                          |          |                                 |              |                      |
| 512                                                       | 1850.2         | 4             | 0                | rear       | 20.7                     | 20.6     | 0.771                           | 0.789        | 20.8                 |
| 661                                                       | 1880.0         | 4             | 0                | rear       | 20.7                     | 20.5     | 0.911                           | <b>0.954</b> | 20.8                 |
| 810                                                       | 1909.8         | 4             | 0                | rear       | 20.7                     | 20.7     | 0.742                           | 0.742        | 20.8                 |
| 661                                                       | 1880.0         | 4             | 0                | right edge | 20.7                     | 20.5     | 0.665                           | 0.696        | 20.8                 |
| 661                                                       | 1880.0         | 4             | 0                | top edge   | 20.7                     | 20.5     | 0.082                           | 0.086        | 20.8                 |
| 661                                                       | 1880.0         | 4             | 0                | rear*      | 20.7                     | 20.5     | 0.830                           | 0.869        | 20.8                 |
| Body GPRS 4TS, <b>GMSK</b>                                |                |               |                  |            |                          |          |                                 |              |                      |
| 661                                                       | 1880.0         | 4             | 0                | rear       | 20.5                     | 20.2     | 0.799                           | 0.856        | 20.8                 |
| 661                                                       | 1880.0         | 4             | 0                | right edge | 20.5                     | 20.1     | 0.601                           | 0.659        | 20.8                 |
| 661                                                       | 1880.0         | 4             | 0                | top edge   | 20.5                     | 20.1     | 0.074                           | 0.081        | 20.8                 |

Table 26: Test results body SAR GSM 1900 MHz

\* - repeated at the highest SAR measurement according to the FCC KDB 865664 D01

\*\* - maximum possible output power declared by manufacturer (including power back-off)

**Note:** No power back off for EGPRS at 850 MHz.

Therefore EGPRS represents the worst case and has been tested in addition to GPRS with the worst case time slot configuration (see section 7.2.1 and 7.2.2).

| measured / extrapolated SAR numbers - Body - WCDMA FDD V 850 MHz |             |                |               |            |                          |          |                                 |              |                   |
|------------------------------------------------------------------|-------------|----------------|---------------|------------|--------------------------|----------|---------------------------------|--------------|-------------------|
| Ch.                                                              | freq. (MHz) | test condition | distance (mm) | Position   | cond. output power (dBm) |          | SAR <sub>1g</sub> results(W/kg) |              | liquid temp. (°C) |
|                                                                  |             |                |               |            | declared**               | measured | measured                        | extrapolated |                   |
| 4132                                                             | 826.4       | RMC            | 0             | rear       | 19.7                     | 19.4     | 1.020                           | 1.093        | 20.7              |
| 4182                                                             | 836.4       | RMC            | 0             | rear       | 19.7                     | 19.7     | 1.180                           | 1.180        | 20.7              |
| 4233                                                             | 846.6       | RMC            | 0             | rear       | 19.7                     | 19.4     | 0.932                           | 0.999        | 20.7              |
| 4182                                                             | 836.4       | RMC            | 0             | right edge | 19.7                     | 19.7     | 0.625                           | 0.625        | 20.7              |
| 4182                                                             | 836.4       | RMC            | 0             | top edge   | 19.7                     | 19.7     | 0.103                           | 0.103        | 20.7              |
| 4182                                                             | 836.4       | RMC            | 0             | rear*      | 19.7                     | 19.7     | 1.210                           | 1.210        | 20.7              |
| 4182                                                             | 836.4       | RMC            | 0             | rear + HS  | 19.7                     | 19.7     | 1.200                           | 1.200        | 20.7              |
| 4182                                                             | 836.4       | HSDPA          | 0             | rear       | 19.7                     | 19.7     | 0.881                           | 0.881        | 20.7              |
| 4182                                                             | 836.4       | HSUPA          | 0             | rear       | 19.7                     | 19.7     | 0.893                           | 0.893        | 20.7              |

Table 27: Test results body SAR UMTS FDD V 850 MHz

\* - repeated at the highest SAR measurement according to the FCC KDB 865664 D01

\*\* - maximum possible output power declared by manufacturer (including power back-off)

| measured / extrapolated SAR numbers - Body - WLAN 2450 MHz |             |                |               |           |                          |          |                                 |              |                  |
|------------------------------------------------------------|-------------|----------------|---------------|-----------|--------------------------|----------|---------------------------------|--------------|------------------|
| Ch.                                                        | freq. (MHz) | Test condition | distance (mm) | Position  | cond. output power (dBm) |          | SAR <sub>1g</sub> results(W/kg) |              | liquid temp.(°C) |
|                                                            |             |                |               |           | declared**               | measured | measured                        | extrapolated |                  |
| 1                                                          | 2412        | 1Mbit/s        | 0             | rear      | 11.5                     | 10.8     | 0.984                           | 1.156        | 20.9             |
| 6                                                          | 2437        | 1Mbit/s        | 0             | rear      | 11.5                     | 11.4     | 1.230                           | 1.259        | 20.9             |
| 11                                                         | 2462        | 1Mbit/s        | 0             | rear      | 11.5                     | 10.5     | 1.020                           | 1.284        | 20.9             |
| 6                                                          | 2437        | 1Mbit/s        | 0             | left edge | 11.5                     | 11.4     | 0.137                           | 0.140        | 20.9             |
| 6                                                          | 2437        | 1Mbit/s        | 0             | rear)*    | 11.5                     | 11.4     | 1.120                           | 1.146        | 20.9             |
| 6                                                          | 2437        | 1Mbit/s        | 0             | rear + HS | 11.5                     | 11.4     | 1.000                           | 1.023        | 20.9             |
| 6                                                          | 2437        | 1Mbit/s        | 0             | rear*     | 11.5                     | 11.4     | 1.100                           | 1.126        | 20.9             |

Table 28: Test results body SAR WLAN 2450 MHz

\* - repeated at the highest SAR measurement according to the FCC KDB 865664

)\* - measured at the worst case position with extended TV Antenna

\*\* - maximum possible output power declared by manufacturer

| measured / extrapolated SAR numbers - Body - WLAN 5GHz |                 |          |           |                          |          |                                 |              |                   |
|--------------------------------------------------------|-----------------|----------|-----------|--------------------------|----------|---------------------------------|--------------|-------------------|
| Ch.                                                    | frequency (MHz) | distance | Position  | cond. output power (dBm) |          | SAR <sub>1g</sub> results(W/kg) |              | liquid temp. (°C) |
|                                                        |                 |          |           | declared**               | measured | measured                        | extrapolated |                   |
| 36                                                     | 5180            | 0        | rear      | 9.3                      | 9.0      | 0.489                           | 0.524        | 21.7              |
| 52                                                     | 5260            | 0        | rear      | 9.3                      | 8.6      | 0.650                           | 0.764        | 21.7              |
| 112                                                    | 5560            | 0        | rear      | 7.5                      | 7.4      | 0.756                           | 0.774        | 21.7              |
| 149                                                    | 5745            | 0        | rear      | 9.5                      | 9.3      | <b>0.894</b>                    | 0.936        | 21.7              |
| 157                                                    | 5785            | 0        | rear      | 9.5                      | 8.9      | 0.830                           | <b>0.953</b> | 21.7              |
| 165                                                    | 5825            | 0        | rear      | 9.5                      | 9.2      | 0.721                           | 0.773        | 21.7              |
| 36                                                     | 5180            | 0        | left edge | 9.3                      | 9.0      | 0.129                           | 0.138        | 21.7              |
| 52                                                     | 5260            | 0        | left edge | 9.3                      | 8.6      | 0.179                           | 0.210        | 21.7              |
| 112                                                    | 5560            | 0        | left edge | 7.5                      | 7.4      | 0.204                           | 0.209        | 21.7              |
| 149                                                    | 5745            | 0        | left edge | 9.5                      | 9.3      | 0.119                           | 0.125        | 21.7              |
| 149                                                    | 5180            | 0        | rear*     | 9.5                      | 9.3      | 0.782                           | 0.819        | 21.7              |
| 149                                                    | 5260            | 0        | rear)*    | 9.5                      | 9.3      | 0.604                           | 0.632        | 21.7              |

Table 29: Test results body SAR WLAN 5GHz

\* - repeated at the highest SAR measurement according to the FCC KDB 865664

)\* - measured at the worst case position with extended TV Antenna

\*\* - maximum possible output power declared by manufacturer

### 7.3.2 General description of test procedures

- The DUT is tested using a CMU 200 communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power.
- SAR tests in **GSM** and **UMTS** modes were performed with **power back off** as is described in chapter 7.1
- Test positions as described in the tables above are in accordance with the specified test standard.
- The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional, apart from the worst case configuration.
- The tests were performed in that configuration, which generates the highest time based averaged output power (see conducted power results).
- UMTS was tested in RMC mode with 12.2 kbit/s and TPC bits set to 'all 1'.
- WLAN was tested in 802.11b mode with 1 MBit/s and in 802.11a mode with 6 MBit/s. According to KDB 248227 the SAR testing for 802.11g/n is not required since the maximum power of 802.11g/n is less ¼ dB higher than maximum power of 802.11a/b.
- Tests in body position were performed with 0 mm air gap between DUT and SAM.

## 8 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

| used                                | Equipment                            | Type             | Manufacturer                    | Serial No. | Last Calibration  | Frequency (months) |
|-------------------------------------|--------------------------------------|------------------|---------------------------------|------------|-------------------|--------------------|
| <input checked="" type="checkbox"/> | Dosimetric E-Field Probe             | ET3DV6           | Schmid & Partner Engineering AG | 1558       | August 24, 2012   | 12                 |
| <input checked="" type="checkbox"/> | Dosimetric E-Field Probe             | EX3DV4           | Schmid & Partner Engineering AG | 3566       | August 23, 2012   | 12                 |
| <input checked="" type="checkbox"/> | 900 MHz System Validation Dipole     | D900V2           | Schmid & Partner Engineering AG | 102        | August 15, 2011   | 24                 |
| <input checked="" type="checkbox"/> | 1900 MHz System Validation Dipole    | D1900V2          | Schmid & Partner Engineering AG | 5d009      | August 17, 2011   | 24                 |
| <input checked="" type="checkbox"/> | 2450 MHz System Validation Dipole    | D2450V2          | Schmid & Partner Engineering AG | 710        | August 13, 2012   | 24                 |
| <input checked="" type="checkbox"/> | 5 GHz System Validation Dipole       | D5GHzV2          | Schmid & Partner Engineering AG | 1055       | August 22, 2011   | 24                 |
| <input checked="" type="checkbox"/> | Data acquisition electronics         | DAE3V1           | Schmid & Partner Engineering AG | 477        | May 09, 2012      | 12                 |
| <input checked="" type="checkbox"/> | Software                             | DASY52 52.8.2    | Schmid & Partner Engineering AG | ---        | N/A               | --                 |
| <input checked="" type="checkbox"/> | Phantom ELI 4.0                      | QDOVA001BA       | Schmid & Partner Engineering AG | 1046       | N/A               | --                 |
| <input checked="" type="checkbox"/> | Universal Radio Communication Tester | CMU 200          | Rohde & Schwarz                 | 106826     | March 06, 2012    | 24                 |
| <input checked="" type="checkbox"/> | Network Analyser 300 kHz to 6 GHz    | 8753ES           | Hewlett Packard)*               | US39174436 | February 24, 2012 | 24                 |
| <input checked="" type="checkbox"/> | Dielectric Probe Kit                 | 85070C           | Hewlett Packard                 | US99360146 | N/A               | 12                 |
| <input checked="" type="checkbox"/> | Signal Generator                     | 8665A            | Hewlett Packard                 | 2833A00112 | January 6, 2012   | 12                 |
| <input checked="" type="checkbox"/> | Amplifier                            | 25S1G4 (25 Watt) | Amplifier Research              | 20452      | N/A               | --                 |
| <input checked="" type="checkbox"/> | Power Meter                          | NRP              | Rohde & Schwarz                 | 101367     | January 6, 2011   | 24                 |
| <input checked="" type="checkbox"/> | Power Meter Sensor                   | NRP Z22          | Rohde & Schwarz                 | 100227     | January 9, 2012   | 12                 |
| <input checked="" type="checkbox"/> | Power Meter Sensor                   | NRP Z22          | Rohde & Schwarz                 | 100234     | January 9, 2012   | 12                 |
| <input checked="" type="checkbox"/> | Directional Coupler                  | 778D             | Hewlett Packard                 | 19171      | January 8, 2012   | 12                 |

)\* : Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

## 9 Observations

No observations exceeding those reported with the single test cases have been made.

## Annex A: System performance check

Date/Time: 15.12.2012 08:20:22

### SystemPerformanceCheck-D900 body 2012-12-15

**DUT: Dipole 900 MHz; Type: D900V2; Serial: 102**

Communication System: CW; Communication System Band: D900 (900.0 MHz); Frequency: 900 MHz;

Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 900 \text{ MHz}$ ;  $\sigma = 1.04 \text{ mho/m}$ ;  $\epsilon_r = 54.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.92, 5.92, 5.92); Calibrated: 24.08.2012;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### System Performance Check/d=15mm, Pin=1000 mW, dist=4.0mm/Area

**Scan (51x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $11.6 \text{ W/kg}$

### System Performance Check/d=15mm, Pin=1000 mW, dist=4.0mm/Zoom


**Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $110.7 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$

Peak SAR (extrapolated) =  $15.918 \text{ mW/g}$

**SAR(1 g) =  $10.8 \text{ mW/g}$ ; SAR(10 g) =  $7.03 \text{ mW/g}$**

Maximum value of SAR (measured) =  $11.8 \text{ W/kg}$

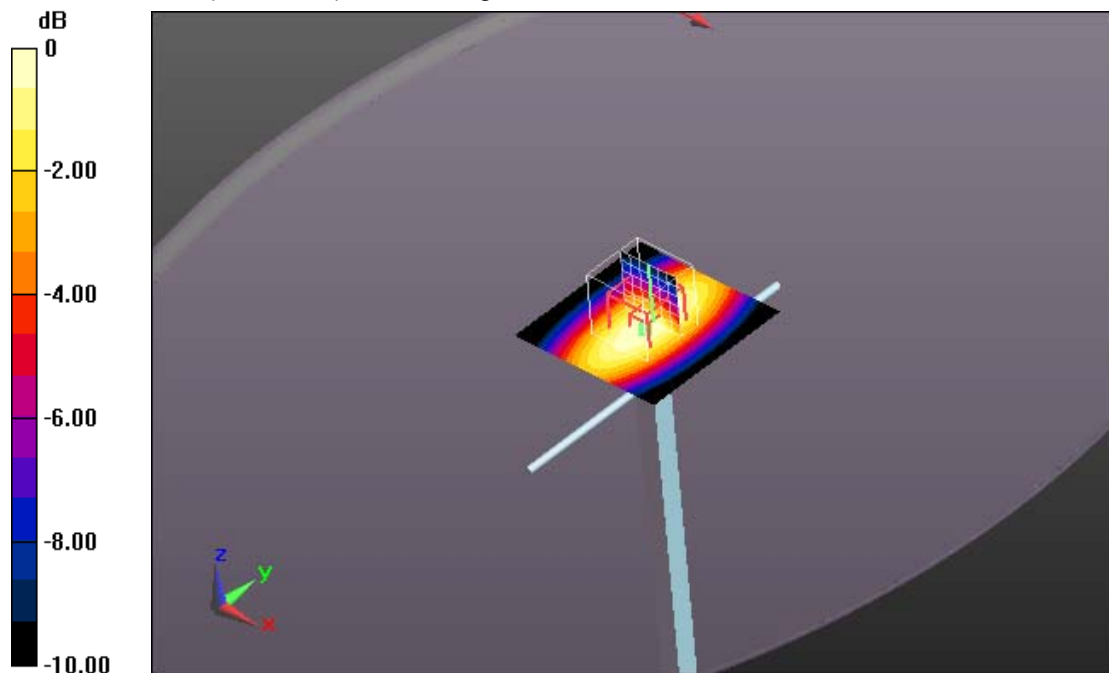

0 dB =  $11.8 \text{ W/kg}$  =  $21.44 \text{ dB W/kg}$

#### Additional information:

ambient temperature:  $21.1^\circ\text{C}$ ; liquid temperature:  $20.7^\circ\text{C}$

Date/Time: 17.12.2012 09:34:26

## SystemPerformanceCheck-D900 body 2012-12-17

**DUT: Dipole 900 MHz; Type: D900V2; Serial: 102**

Communication System: CW; Communication System Band: D900 (900.0 MHz); Frequency: 900 MHz;

Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 900 \text{ MHz}$ ;  $\sigma = 1.04 \text{ mho/m}$ ;  $\epsilon_r = 54.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.92, 5.92, 5.92); Calibrated: 24.08.2012;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

## System Performance Check/d=15mm, Pin=1000 mW, dist=4.0mm/Area

**Scan (51x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $11.7 \text{ W/kg}$

## System Performance Check/d=15mm, Pin=1000 mW, dist=4.0mm/Zoom


**Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $110.7 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$

Peak SAR (extrapolated) =  $16.029 \text{ mW/g}$

**SAR(1 g) =  $10.9 \text{ mW/g}$ ; SAR(10 g) =  $7.07 \text{ mW/g}$**

Maximum value of SAR (measured) =  $11.8 \text{ W/kg}$

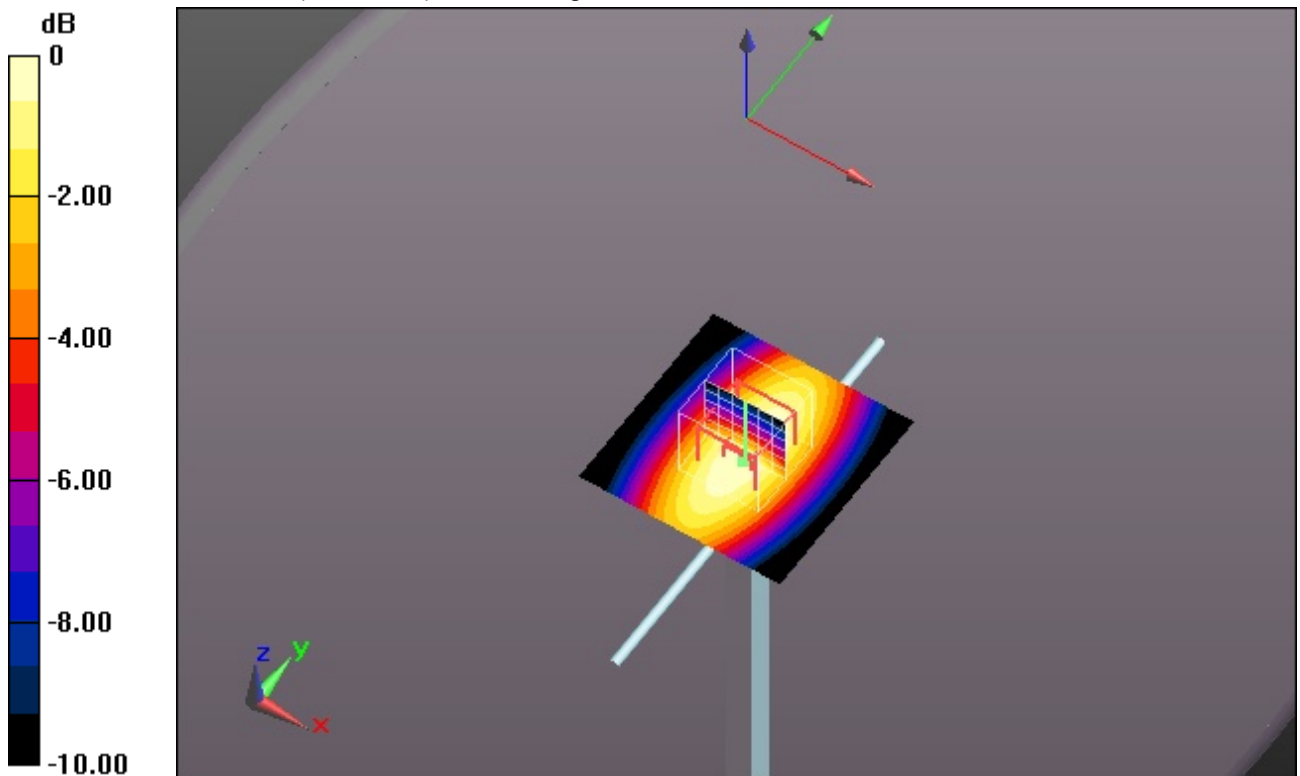

0 dB =  $11.8 \text{ W/kg}$  =  $21.44 \text{ dB W/kg}$

### Additional information:

ambient temperature:  $21.3^\circ\text{C}$ ; liquid temperature:  $20.5^\circ\text{C}$

Date/Time: 18.12.2012 14:50:33

**SystemPerformanceCheck-D1900 body 2012-12-18****DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d009**

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz;

Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.2, 4.2, 4.2); Calibrated: 24.08.2012;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**System Performance Check/d=10mm, Pin=1000 mW, dist=4.0mm/Area****Scan (51x51x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 60.0 W/kg


**System Performance Check/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom****Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 187.2 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 69.039 mW/g

**SAR(1 g) = 41.6 mW/g; SAR(10 g) = 22.3 mW/g**

Maximum value of SAR (measured) = 47.7 W/kg

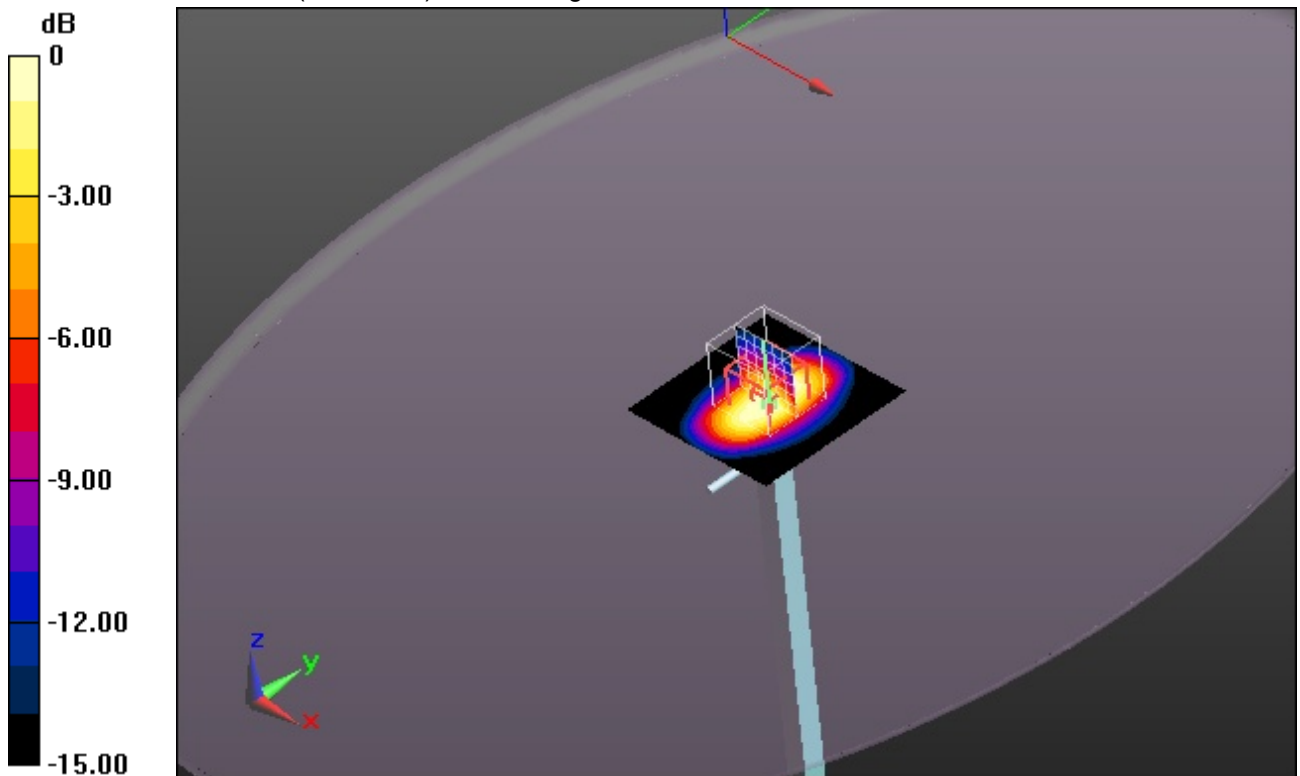

0 dB = 47.7 W/kg = 33.57 dB W/kg

**Additional information:**

ambient temperature: 21.9°C; liquid temperature: 20.8°C

Date/Time: 19.12.2012 09:19:29

**SystemPerformanceCheck-D2450 body 2012-12-19****DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 710**

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz;

Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2$  mho/m;  $\epsilon_r = 52.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.06, 4.06, 4.06); Calibrated: 24.08.2012;
- Modulation Compensation:
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**System Performance Check/d=10mm, Pin=100 mW, dist=4.0mm/Area Scan****(51x51x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 7.42 W/kg


**System Performance Check/d=10mm, Pin=100 mW, dist=4.0mm/Zoom****Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 54.497 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 15.206 mW/g

**SAR(1 g) = 5.59 mW/g; SAR(10 g) = 2.49 mW/g**

Maximum value of SAR (measured) = 6.02 W/kg

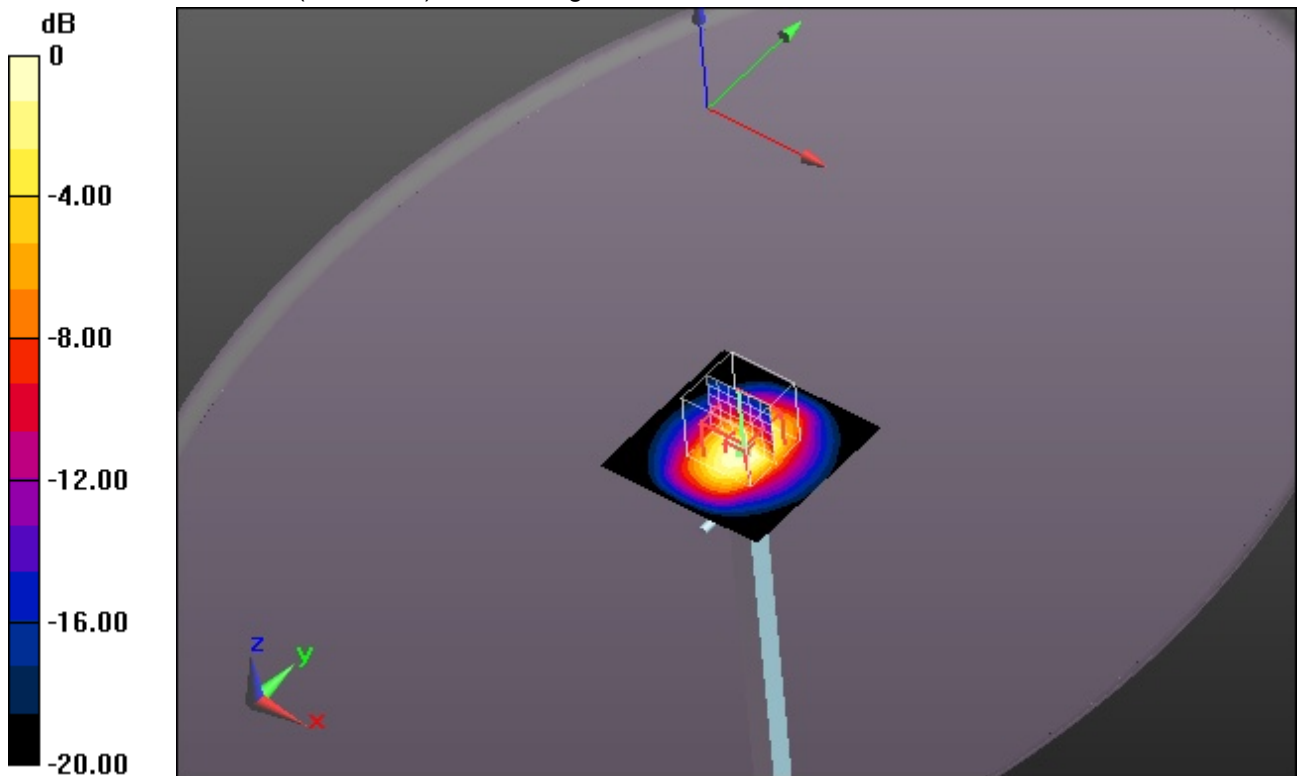

0 dB = 6.02 W/kg = 15.59 dB W/kg

**Additional information:**

ambient temperature: 21.9°C; liquid temperature: 21.0°C

Date/Time: 05.01.2013 07:08:47

**SystemPerformanceCheck-D5GHz-body 2013-01-05****DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1055**

Communication System: CW; Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.34$  mho/m;  $\epsilon_r = 48.02$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.5, 3.5, 3.5); Calibrated: 23.08.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 22.0$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)


**MSL/d=10mm, Pin=100mW 5.2GHz/Zoom Scan (8x8x8) (8x8x8)/Cube 0:**Measurement grid:  $dx=4.3$ mm,  $dy=4.3$ mm,  $dz=3$ mm

Reference Value = 43.398 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 30.603 mW/g

**SAR(1 g) = 7.92 mW/g; SAR(10 g) = 2.22 mW/g**

Maximum value of SAR (measured) = 16.0 W/kg

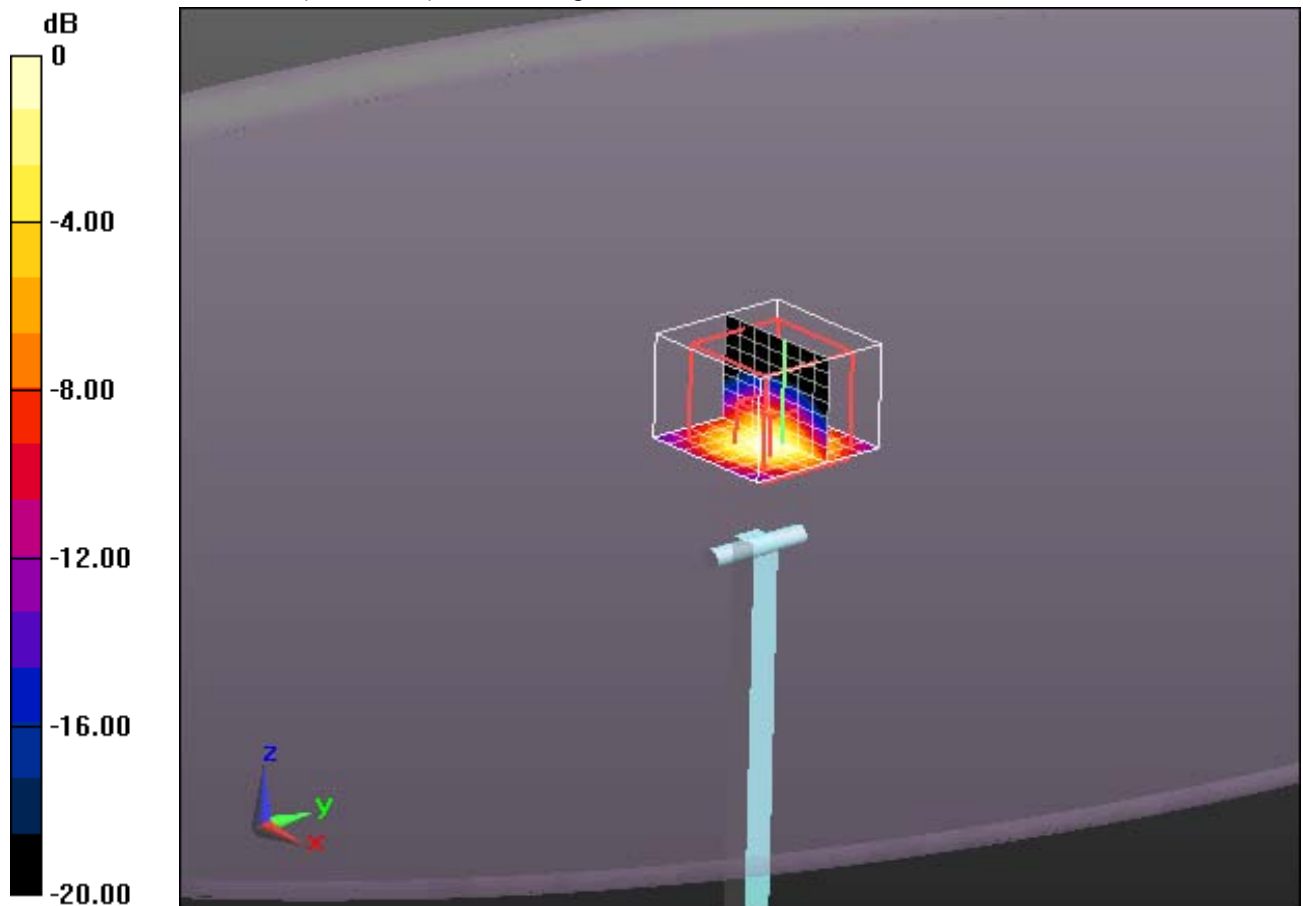

0 dB = 16.0 W/kg = 24.08 dB W/kg

**Additional information:**

ambient temperature: 23.5°C; liquid temperature: 21.7°C

Date/Time: 05.01.2013 07:32:42

**SystemPerformanceCheck-D5GHz-body 2013-01-05****DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1055**

Communication System: CW; Frequency: 5500 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.71$  mho/m;  $\epsilon_r = 47.27$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.1, 3.1, 3.1); Calibrated: 23.08.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 22.0$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)


**MSL/d=10mm, Pin=100mW 5.5GHz/Zoom Scan (8x8x8) (8x8x8)/Cube 0:**Measurement grid:  $dx=4.3$ mm,  $dy=4.3$ mm,  $dz=3$ mm

Reference Value = 41.525 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 33.308 mW/g

**SAR(1 g) = 8.32 mW/g; SAR(10 g) = 2.32 mW/g**

Maximum value of SAR (measured) = 17.3 W/kg

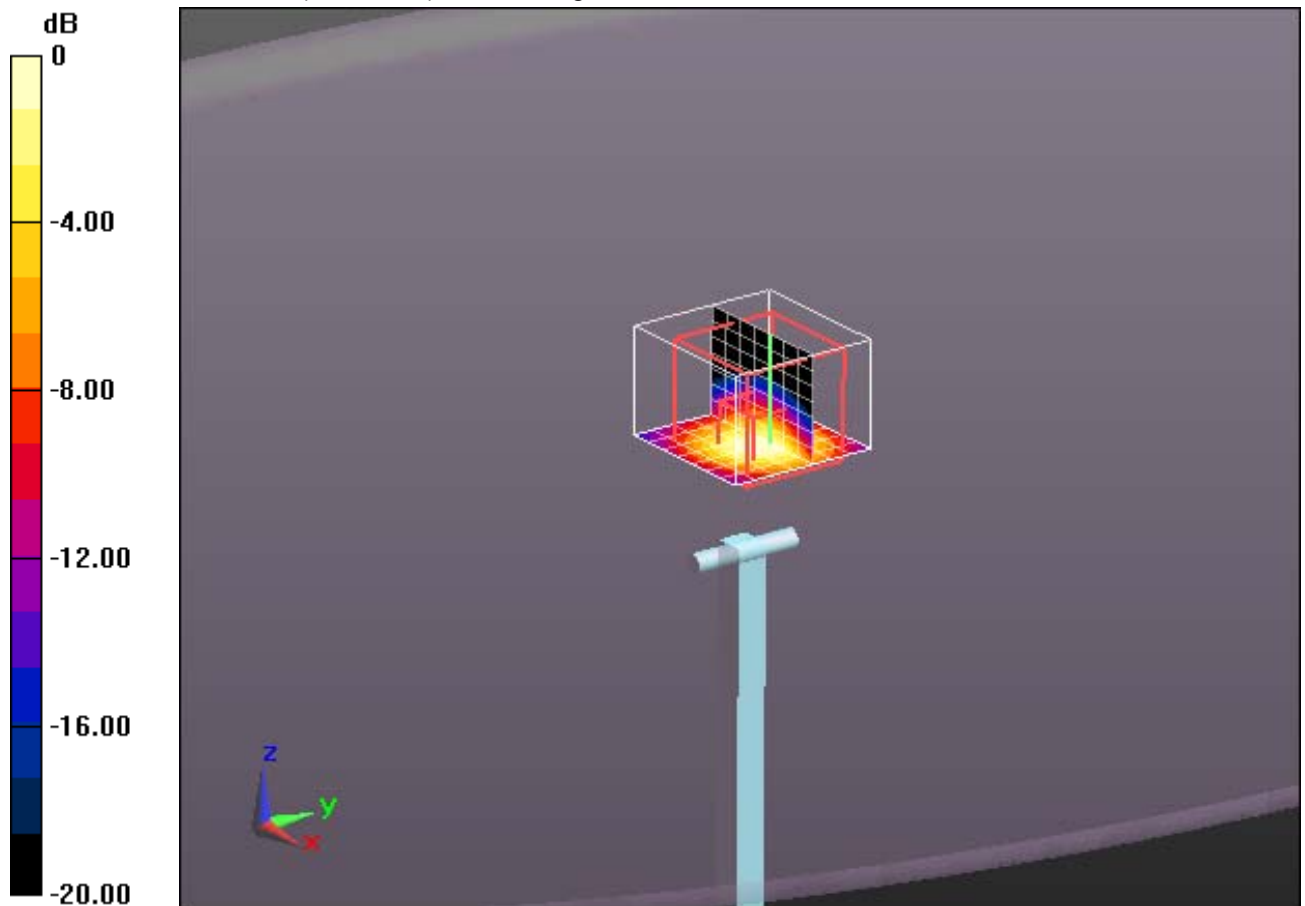

0 dB = 17.3 W/kg = 24.76 dB W/kg

**Additional information:**

ambient temperature: 23.5°C; liquid temperature: 21.7°C

Date/Time: 05.01.2013 07:44:53

**SystemPerformanceCheck-D5GHz-body 2013-01-05****DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1055**

Communication System: CW; Frequency: 5800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.1$  mho/m;  $\epsilon_r = 46.69$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.12, 3.12, 3.12); Calibrated: 23.08.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 22.0$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)


**MSL/d=10mm, Pin=100mW 5.8GHz/Zoom Scan (8x8x8) (8x8x8)/Cube 0:**Measurement grid:  $dx=4.3$ mm,  $dy=4.3$ mm,  $dz=3$ mm

Reference Value = 40.560 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 33.168 mW/g

**SAR(1 g) = 8.08 mW/g; SAR(10 g) = 2.16 mW/g**

Maximum value of SAR (measured) = 16.4 W/kg

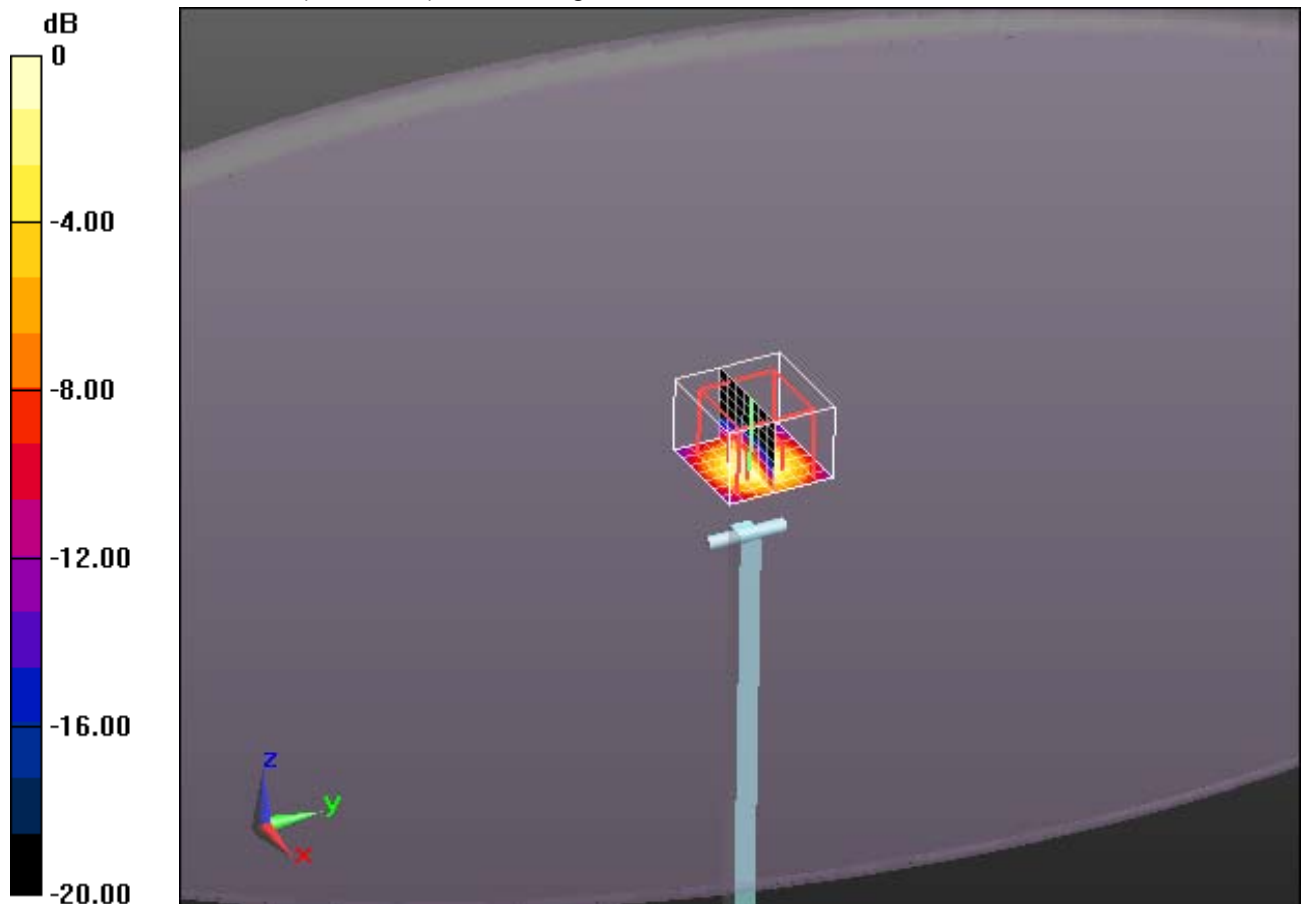

0 dB = 16.4 W/kg = 24.30 dB W/kg

**Additional information:**

ambient temperature: 23.5°C; liquid temperature: 21.7°C

## Annex B: DASY measurement results

### Annex B.1: GSM 850MHz

Date/Time: 17.12.2012 12:20:54

#### OET65-GSM850-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: PCS 850 EGPRS 3TS, **8PSK**; Frequency: 824.2 MHz; Communication System  
PAR: 7.78 dB; PMF: 2.07253

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

#### Body MSL/Rear Position - Low 8PSK/Area Scan (141x221x1): Interpolated grid:

$dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.14 W/kg

#### Body MSL/Rear Position - Low 8PSK/Zoom Scan (8x8x7)/Cube 0: Measurement


grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 36.060 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.427 mW/g

**SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.644 mW/g**

Maximum value of SAR (measured) = 1.32 W/kg

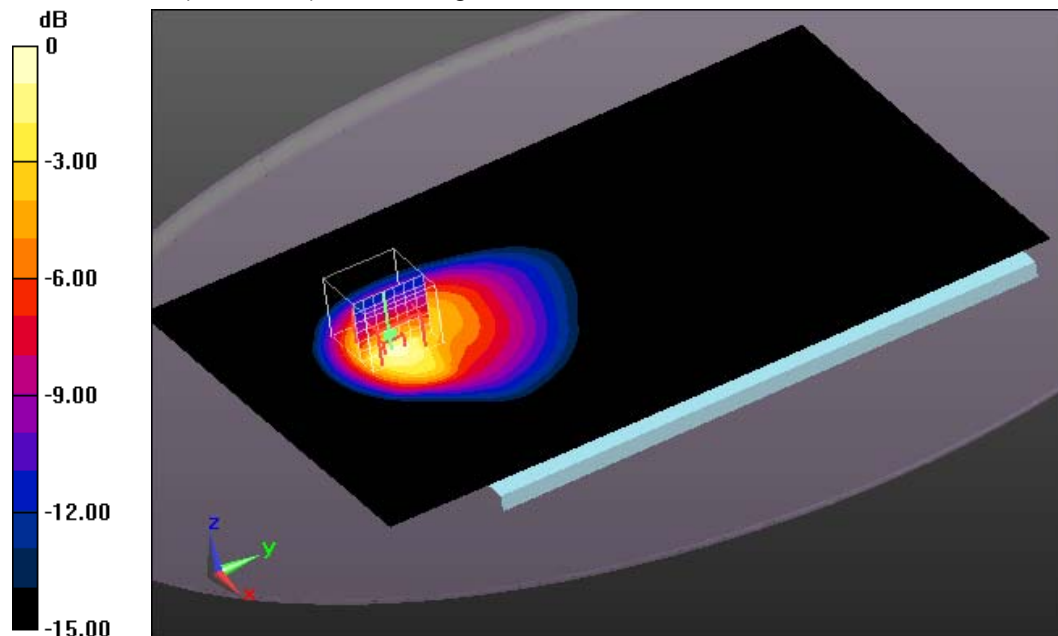

0 dB = 1.32 W/kg = 2.41 dB W/kg

#### Additional information:

position or distance of DUT to SAM: 0mm

ambient temperature: 22.6°C; liquid temperature: 20.7°C

Date/Time: 17.12.2012 11:49:38

## OET65-GSM850-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: PCS 850 EGPRS 3TS, **8PSK**; Frequency: 836.6 MHz; Communication System PAR: 7.78 dB; PMF: 2.07253

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.399$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### Body MSL/Rear Position - Middle 8PSK/Area Scan (141x221x1): Interpolated

grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.07 W/kg

### Body MSL/Rear Position - Middle 8PSK/Zoom Scan (8x8x7)/Cube 0:


Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 34.513 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.265 mW/g

**SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.600 mW/g**

Maximum value of SAR (measured) = 1.22 W/kg

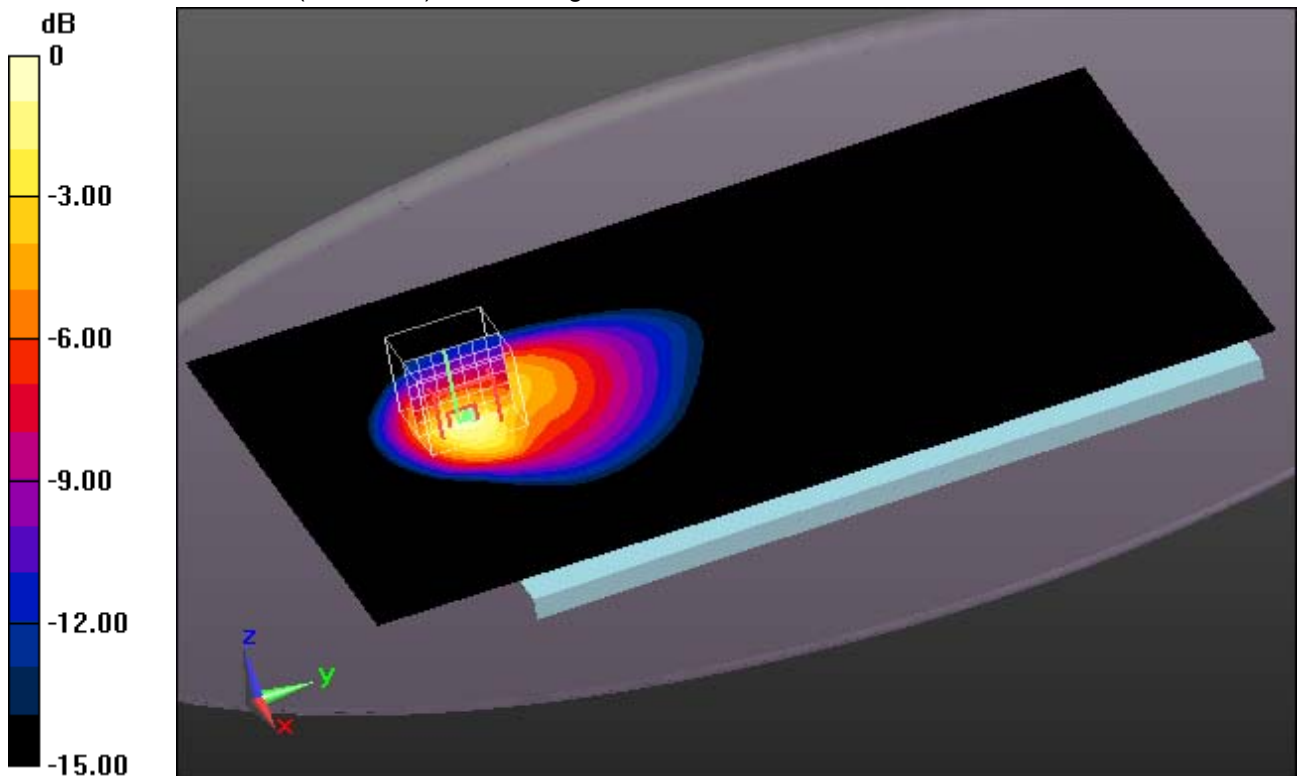

0 dB = 1.22 W/kg = 1.73 dB W/kg

#### Additional information:

position or distance of DUT to SAM: 0mm

ambient temperature: 22.6°C; liquid temperature: 20.7°C

Date/Time: 17.12.2012 12:51:41

**OET65-GSM850-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**Communication System: PCS 850 EGPRS 3TS, **8PSK**; Frequency: 848.8 MHz; Communication System  
PAR: 7.78 dB; PMF: 2.07253Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.989$  mho/m;  $\epsilon_r = 55.309$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - High 8PSK/Area Scan (141x221x1):** Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.994 W/kg

**Body MSL/Rear Position - High 8PSK/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.134 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.092 mW/g

**SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.555 mW/g**

Maximum value of SAR (measured) = 1.13 W/kg

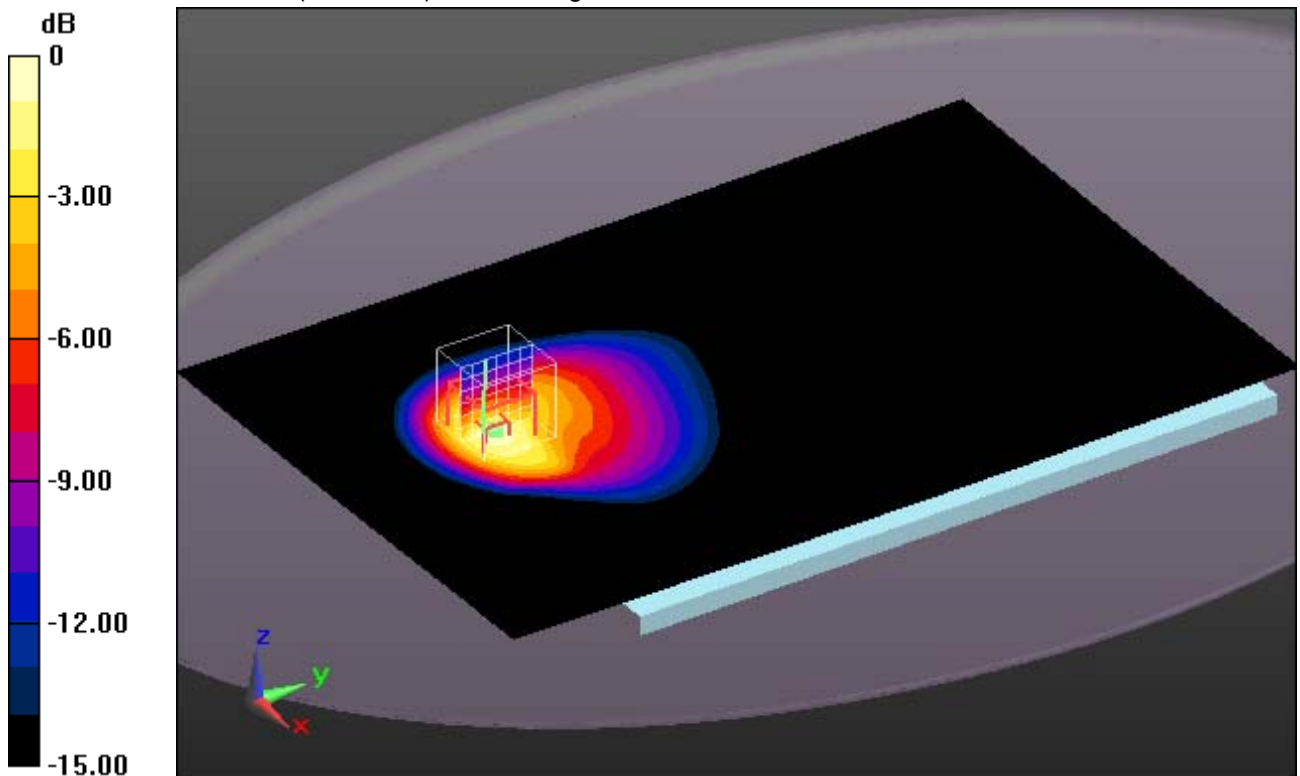

0 dB = 1.13 W/kg = 1.06 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0mm

ambient temperature: 22.6°C; liquid temperature: 20.7°C

Date/Time: 17.12.2012 13:22:23

## OET65-GSM850-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: PCS 850 EGPRS 3TS, **8PSK**; Frequency: 836.6 MHz; Communication System

PAR: 7.78 dB; PMF: 2.07253

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.399$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### Body MSL/Right Position - Middle 8PSK/Area Scan (81x151x1): Interpolated grid:

$dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.704 W/kg

### Body MSL/Right Position - Middle 8PSK/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 27.605 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.239 mW/g

**SAR(1 g) = 0.618 mW/g; SAR(10 g) = 0.277 mW/g**

Maximum value of SAR (measured) = 0.712 W/kg

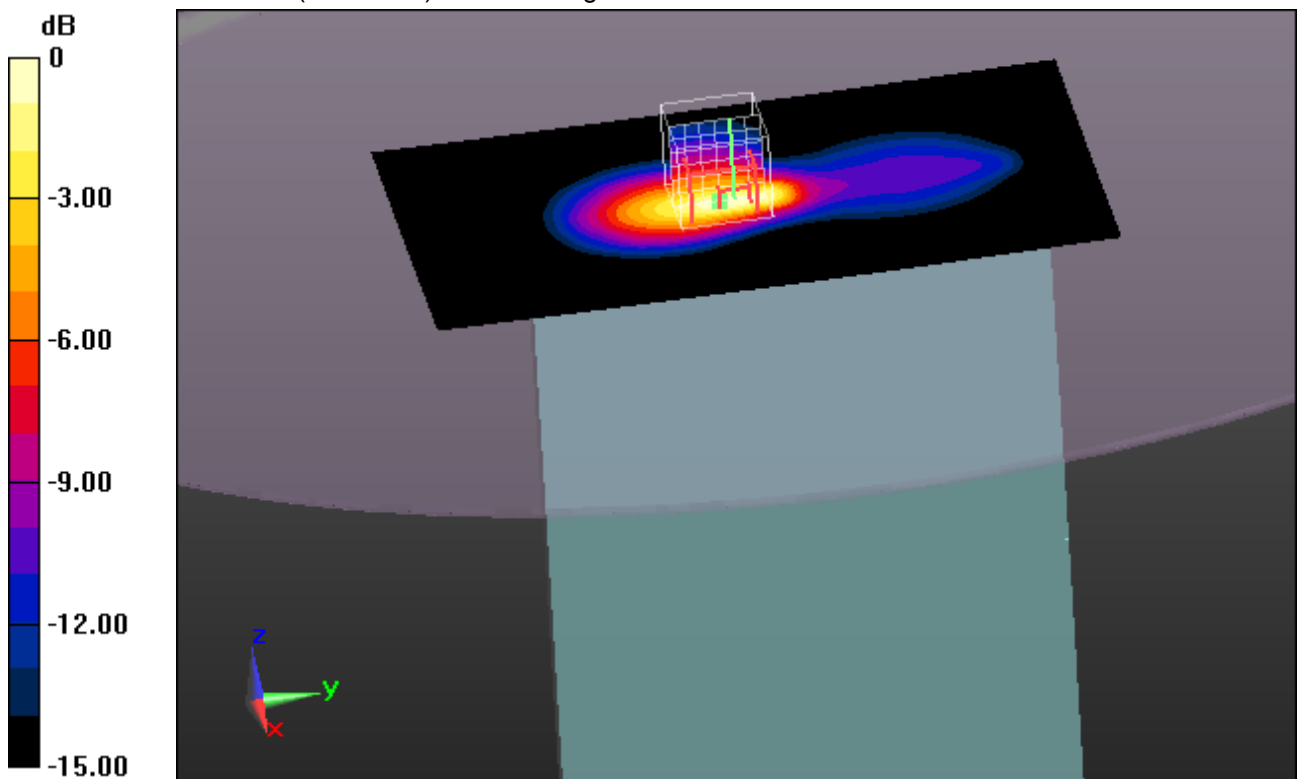

0 dB = 0.712 W/kg = -2.95 dB W/kg

#### Additional information:

position or distance of DUT to SAM: 0mm

ambient temperature: 22.6°C; liquid temperature: 20.7°C

Date/Time: 17.12.2012 14:40:04

**OET65-GSM850-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**Communication System: PCS 850 EGPRS 3TS, **8PSK**; Frequency: 836.6 MHz; Communication System  
PAR: 7.78 dB; PMF: 2.07253Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.399$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Top Position - Middle 8PSK/Area Scan (81x201x1):** Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.159 W/kg

**Body MSL/Top Position - Middle 8PSK/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.832 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.209 mW/g

**SAR(1 g) = 0.149 mW/g; SAR(10 g) = 0.103 mW/g**

Maximum value of SAR (measured) = 0.159 W/kg

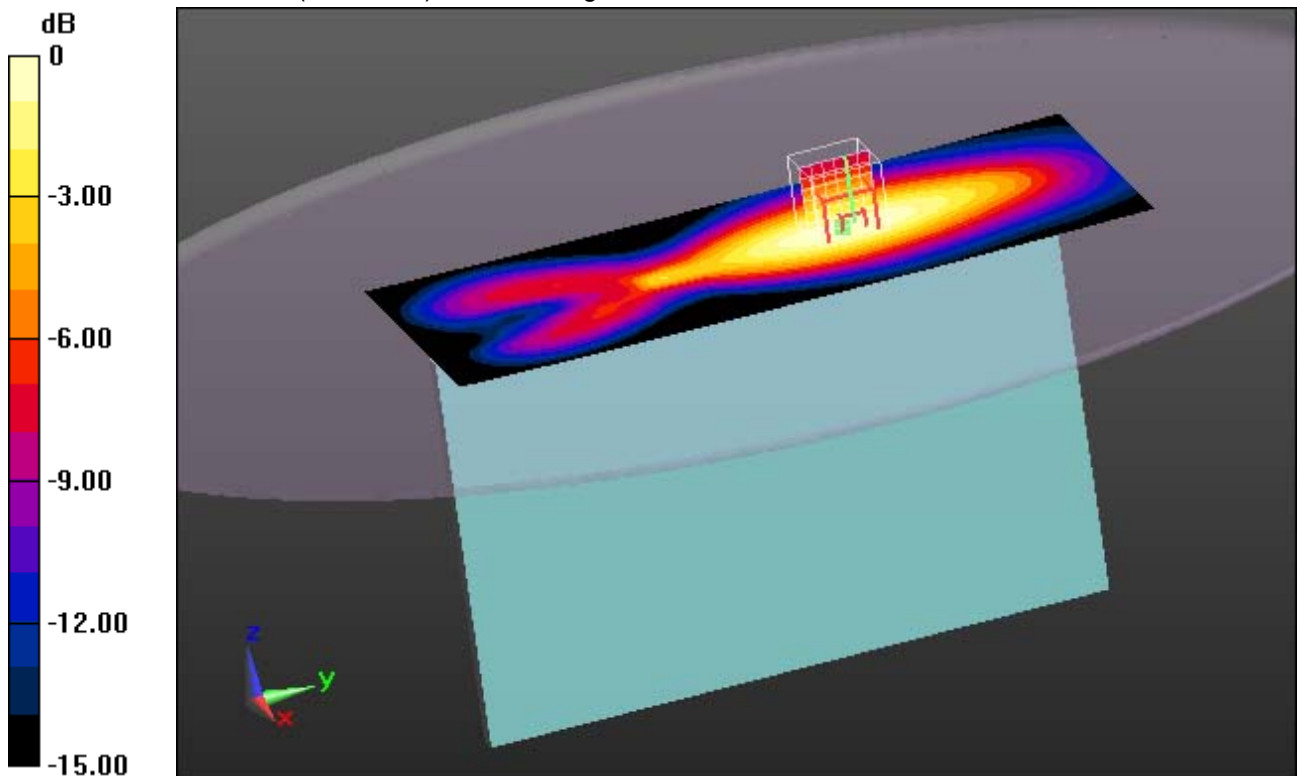

0 dB = 0.159 W/kg = -15.97 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0mm

ambient temperature: 22.6°C; liquid temperature: 20.7°C

Date/Time: 17.12.2012 18:56:22

**OET65-GSM850-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**Communication System: PCS 850 EGPRS 3TS, **8PSK**; Frequency: 824.2 MHz; Communication System

PAR: 7.78 dB; PMF: 2.07253

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Low 8PSK WC/Area Scan (131x201x1): Interpolated**grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.37 W/kg


**Body MSL/Rear Position - Low 8PSK WC/Zoom Scan (7x7x7)/Cube 0:**Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 33.404 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.788 mW/g

**SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.695 mW/g**

Maximum value of SAR (measured) = 1.43 W/kg

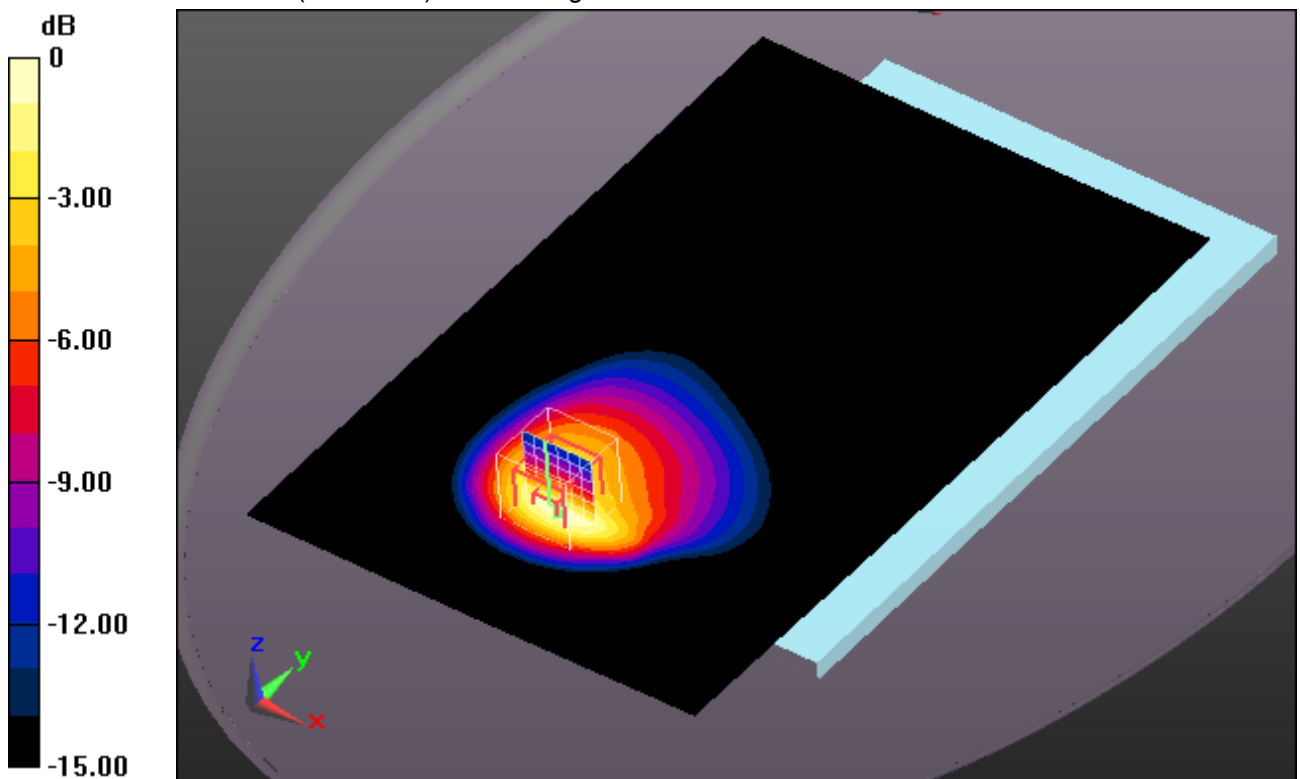**Additional information:**

position or distance of DUT to SAM: 0mm

ambient temperature: 22.6°C; liquid temperature: 20.7°C

Date/Time: 17.12.2012 15:34:08

## OET65-GSM850-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: PCS 850 EGPRS 3TS, **8PSK**; Frequency: 824.2 MHz; Communication System PAR: 7.78 dB; PMF: 2.07253

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### Body MSL/Rear Position - Low 8PSK with HS/Area Scan (141x221x1):

Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.15 W/kg

### Body MSL/Rear Position - Low 8PSK with HS/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 32.622 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.505 mW/g

**SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.653 mW/g**

Maximum value of SAR (measured) = 1.33 W/kg

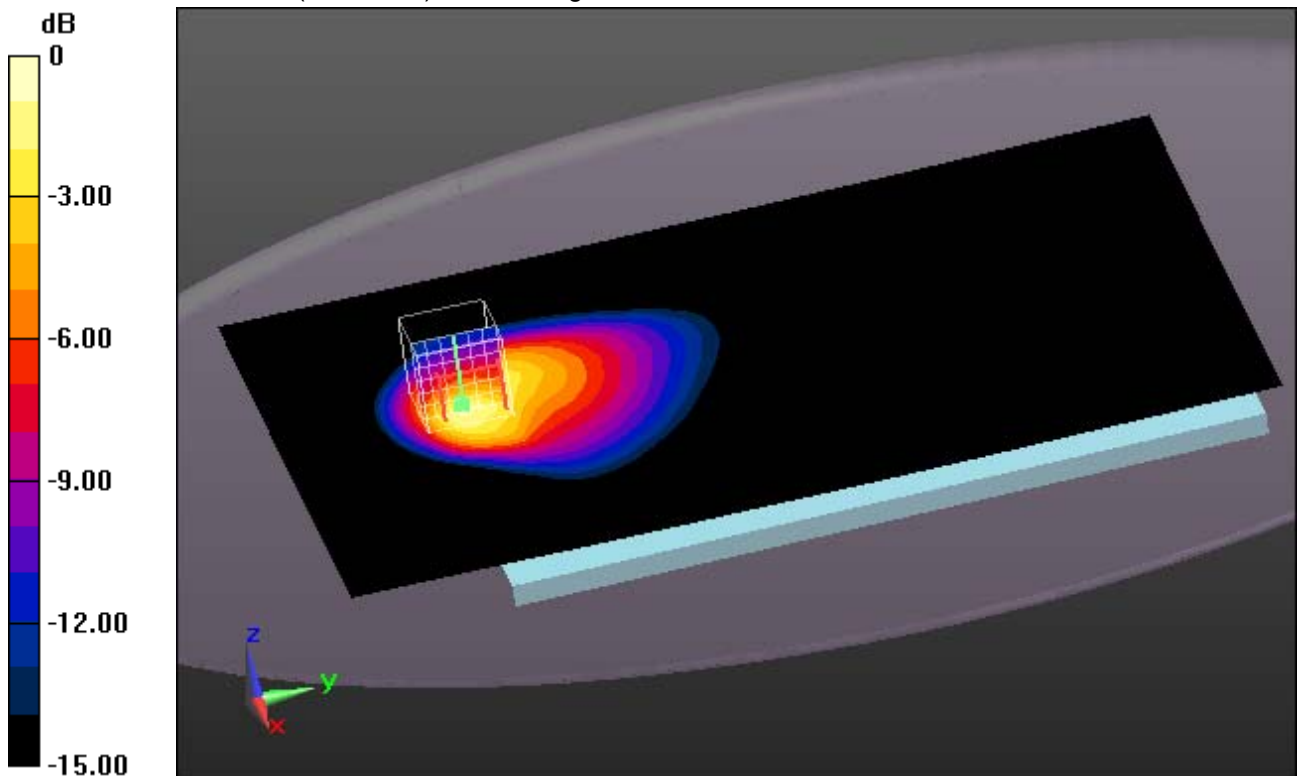

0 dB = 1.33 W/kg = 2.48 dB W/kg

#### Additional information:

position or distance of DUT to SAM: 0mm with headset

ambient temperature: 22.6°C; liquid temperature: 20.7°C

Date/Time: 17.12.2012 16:01:00

**OET65-GSM850-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**Communication System: GPRS-FDD (TDMA, **GMSK**, TN 0-1-2-3); Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 824.2 MHz; Communication System PAR: 3.55 dB; PMF: 1.50487Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X: a=40.6, b=99.4, c=23.0, calibrated PAR=3.6 dB / Y: a=33.7, b=99.5, c=23.1, calibrated PAR=3.6 dB / Z: a=31.5, b=99.5, c=23.6, calibrated PAR=3.6 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.7, 32.7
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Low/Area Scan (141x221x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.935 W/kg

**Body MSL/Rear Position - Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.082 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.721 mW/g

**SAR(1 g) = 0.914 mW/g; SAR(10 g) = 0.511 mW/g**

Maximum value of SAR (measured) = 1.00 W/kg

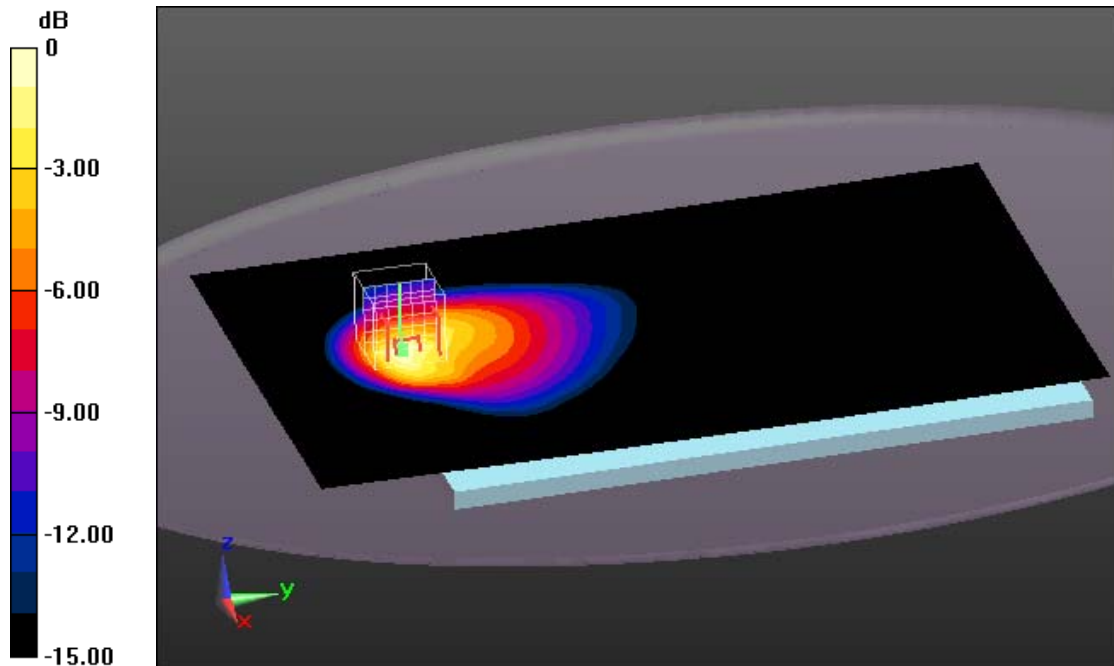

0 dB = 1.00 W/kg = 0.00 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0mm

ambient temperature: 22.6°C; liquid temperature: 20.7°C

Date/Time: 17.12.2012 10:50:13

**OET65-GSM850-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**Communication System: GPRS-FDD (TDMA, **GMSK**, TN 0-1-2-3); Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 3.55 dB; PMF: 1.50487Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.399$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X: a=40.6, b=99.4, c=23.0, calibrated PAR=3.6 dB / Y: a=33.7, b=99.5, c=23.1, calibrated PAR=3.6 dB / Z: a=31.5, b=99.5, c=23.6, calibrated PAR=3.6 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.7, 32.7
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Middle/Area Scan (141x221x1):** Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.836 W/kg

**Body MSL/Rear Position - Middle/Zoom Scan (8x8x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.547 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.641 mW/g

**SAR(1 g) = 0.859 mW/g; SAR(10 g) = 0.475 mW/g**

Maximum value of SAR (measured) = 0.950 W/kg

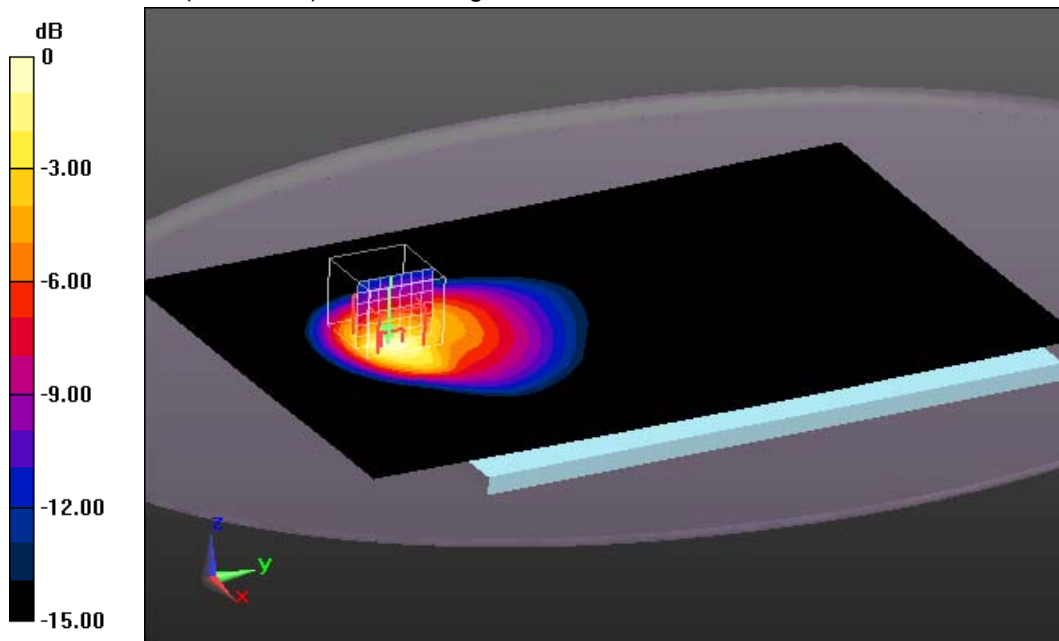

0 dB = 0.950 W/kg = -0.45 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0mm

ambient temperature: 22.6°C; liquid temperature: 20.7°C

Date/Time: 17.12.2012 16:33:44

**OET65-GSM850-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: GPRS-FDD (TDMA, **GMSK**, TN 0-1-2-3); Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.6 MHz; Communication System PAR: 3.55 dB; PMF: 1.50487  
 Medium parameters used (interpolated):  $f = 848.6$  MHz;  $\sigma = 0.989$  mho/m;  $\epsilon_r = 55.31$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X: a=40.6, b=99.4, c=23.0, calibrated PAR=3.6 dB / Y: a=33.7, b=99.5, c=23.1, calibrated PAR=3.6 dB / Z: a=31.5, b=99.5, c=23.6, calibrated PAR=3.6 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.7, 32.7
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Hi/Area Scan (141x221x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.811 W/kg

**Body MSL/Rear Position - Hi/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.847 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.481 mW/g

**SAR(1 g) = 0.789 mW/g; SAR(10 g) = 0.439 mW/g**

Maximum value of SAR (measured) = 0.868 W/kg

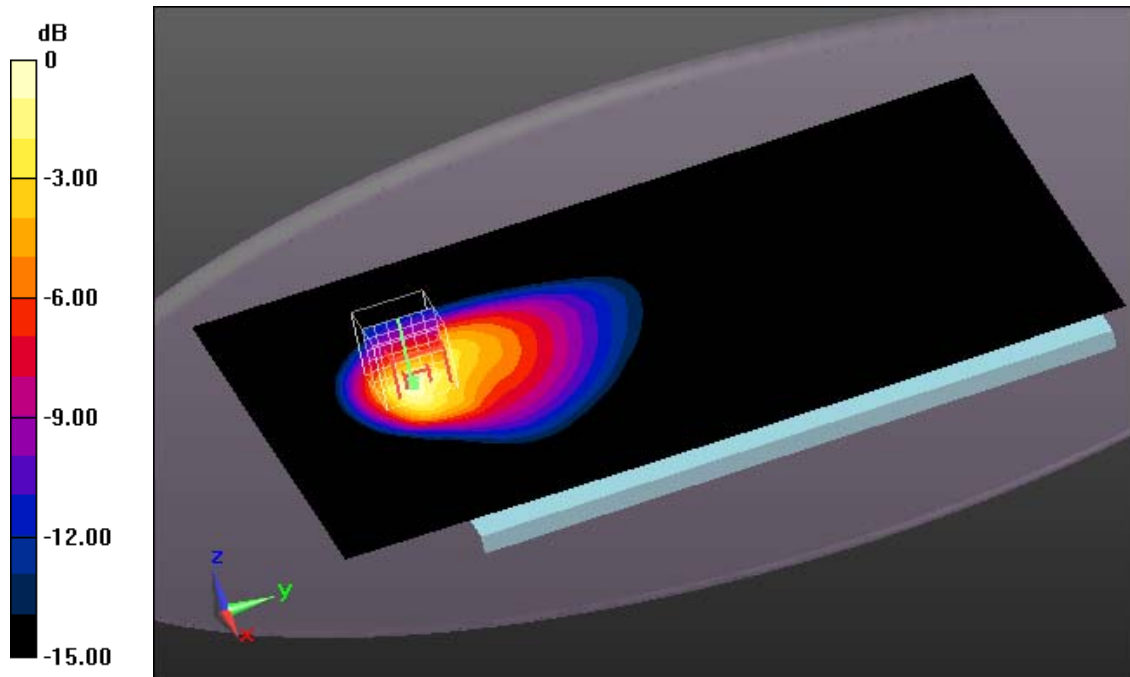

0 dB = 0.868 W/kg = -1.23 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0mm

ambient temperature: 22.6°C; liquid temperature: 20.7°C

Date/Time: 17.12.2012 13:48:36

**OET65-GSM850-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: GPRS-FDD (TDMA, **GMSK**, TN 0-1-2-3); Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 3.55 dB; PMF: 1.50487  
 Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.399$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X: a=40.6, b=99.4, c=23.0, calibrated PAR=3.6 dB / Y: a=33.7, b=99.5, c=23.1, calibrated PAR=3.6 dB / Z: a=31.5, b=99.5, c=23.6, calibrated PAR=3.6 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.7, 32.7
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Right Side Position - Mid/Area Scan (81x151x1):** Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.570 W/kg

**Body MSL/Right Side Position - Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.410 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.659 mW/g

**SAR(1 g) = 0.505 mW/g; SAR(10 g) = 0.232 mW/g**

Maximum value of SAR (measured) = 0.579 W/kg

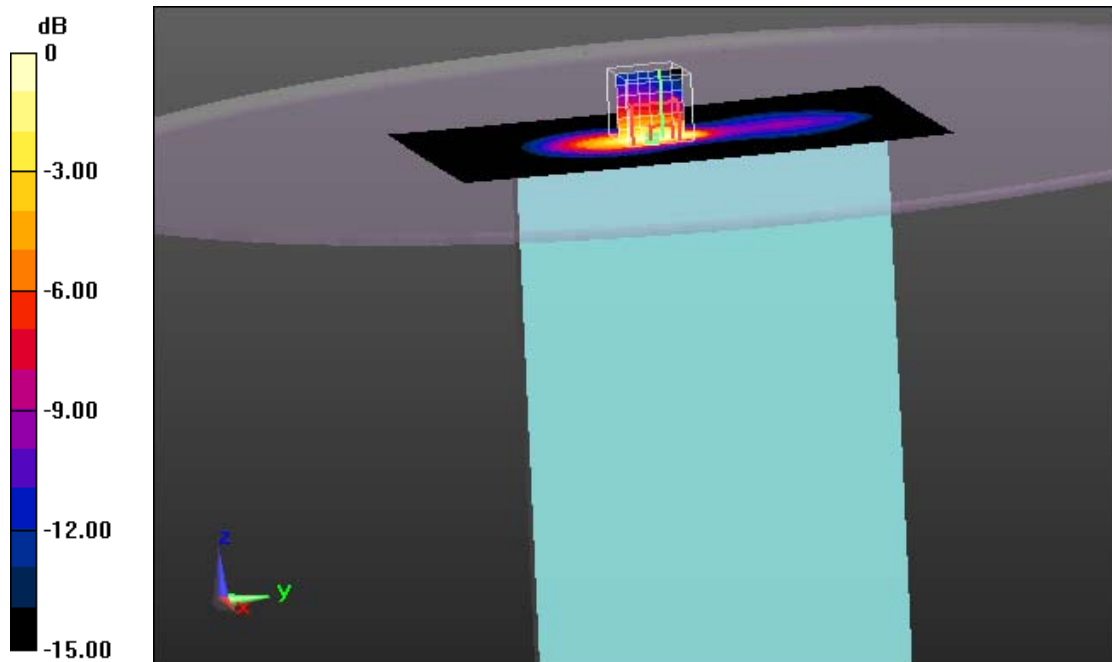

0 dB = 0.579 W/kg = -4.75 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0mm

ambient temperature: 22.6°C; liquid temperature: 20.7°C

Date/Time: 17.12.2012 14:09:54

**OET65-GSM850-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**Communication System: GPRS-FDD (TDMA, **GMSK**, TN 0-1-2-3); Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 3.55 dB; PMF: 1.50487Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.399$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X: a=40.6, b=99.4, c=23.0, calibrated PAR=3.6 dB / Y: a=33.7, b=99.5, c=23.1, calibrated PAR=3.6 dB / Z: a=31.5, b=99.5, c=23.6, calibrated PAR=3.6 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.7, 32.7
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Top Position - Middle/Area Scan (81x201x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.136 W/kg

**Body MSL/Top Position - Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.991 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.180 mW/g

**SAR(1 g) = 0.130 mW/g; SAR(10 g) = 0.090 mW/g**

Maximum value of SAR (measured) = 0.139 W/kg

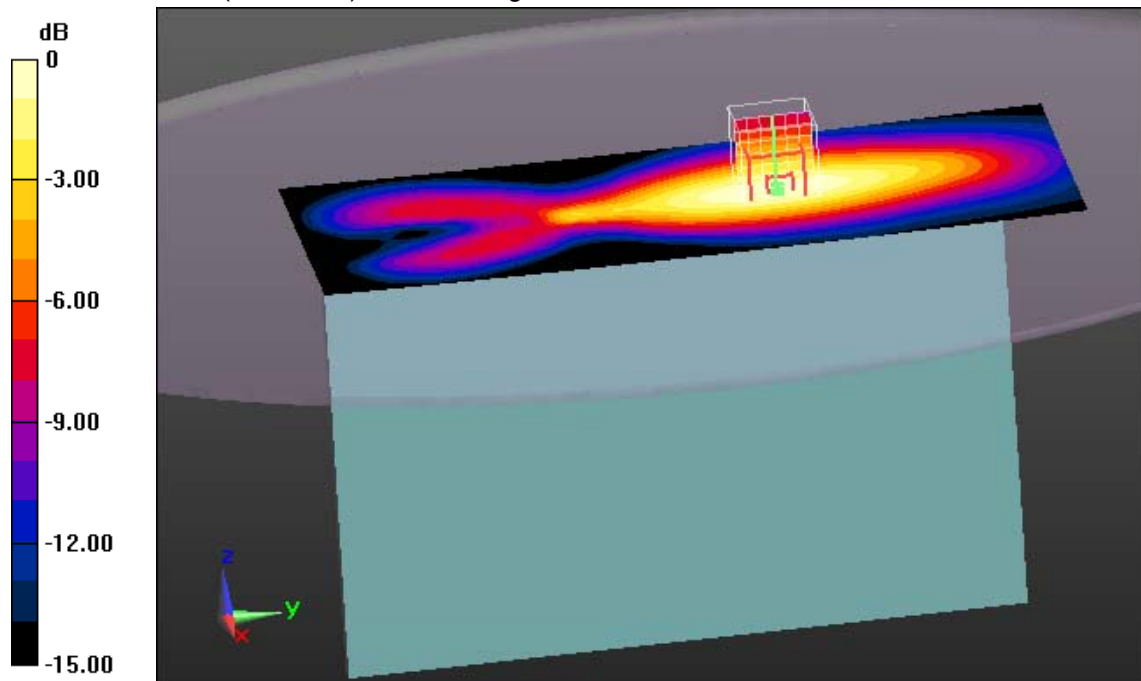

0 dB = 0.139 W/kg = -17.14 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0mm

ambient temperature: 22.6°C; liquid temperature: 20.7°C

Date/Time: 17.12.2012 17:01:51

**OET65-GSM850-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**Communication System: GPRS-FDD (TDMA, **GMSK**, TN 0-1-2-3); Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 824.2 MHz; Communication System PAR: 3.55 dB; PMF: 1.50487Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.97$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X: a=40.6, b=99.4, c=23.0, calibrated PAR=3.6 dB / Y: a=33.7, b=99.5, c=23.1, calibrated PAR=3.6 dB / Z: a=31.5, b=99.5, c=23.6, calibrated PAR=3.6 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.7, 32.7
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Low WC/Area Scan (141x221x1):** Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.934 W/kg

**Body MSL/Rear Position - Low WC/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.347 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.719 mW/g

**SAR(1 g) = 0.909 mW/g; SAR(10 g) = 0.509 mW/g**

Maximum value of SAR (measured) = 0.989 W/kg

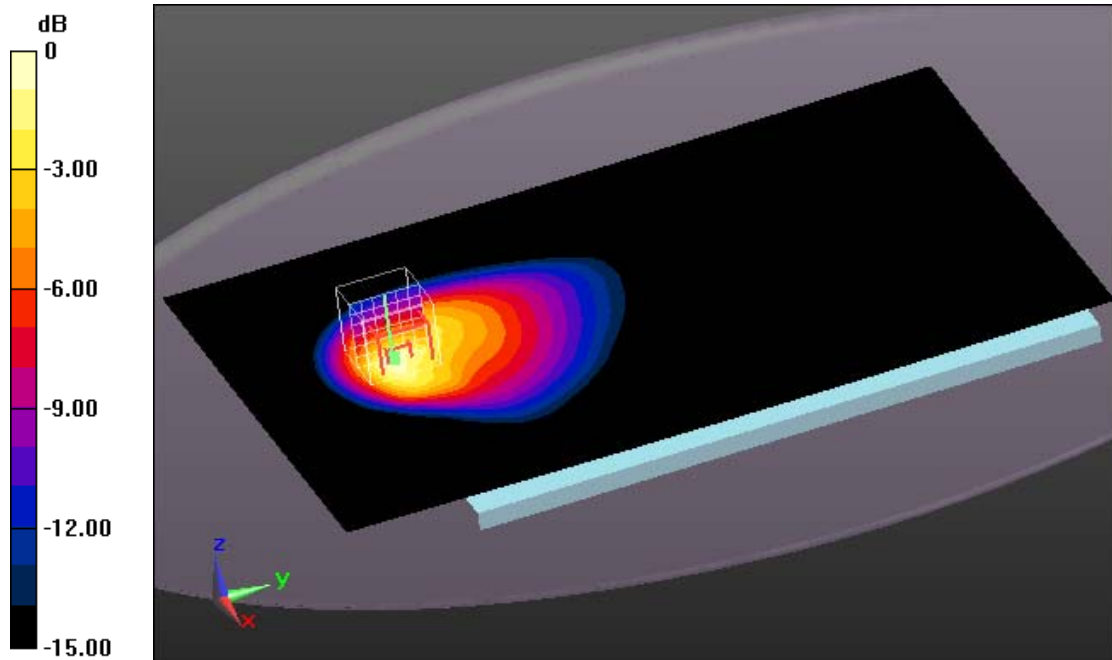

0 dB = 0.989 W/kg = -0.10 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0mm

ambient temperature: 22.6°C; liquid temperature: 20.7°C

## Annex B.2: GSM 1900MHz

Date/Time: 18.12.2012 11:22:19

### OET65-GSM1900-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: EDGE (8PSK, TN 0-1-2-3); Communication System Band: PCS 1900; Frequency: 1850.2 MHz; Communication System PAR: 6.53 dB; PMF: 1.79267

Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.46$  mho/m;  $\epsilon_r = 53.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.2, 4.2, 4.2); Calibrated: 24.08.2012;

- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$

- Electronics: DAE3 Sn477; Calibrated: 09.05.2012

- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046

- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### Body MSL/Rear Position - Low 8PSK/Area Scan (141x221x1): Interpolated grid:

$dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.902 W/kg

### Body MSL/Rear Position - Low 8PSK/Zoom Scan (7x7x7)/Cube 0: Measurement


grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 25.924 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.837 mW/g

**SAR(1 g) = 0.771 mW/g; SAR(10 g) = 0.379 mW/g**

Maximum value of SAR (measured) = 0.888 W/kg

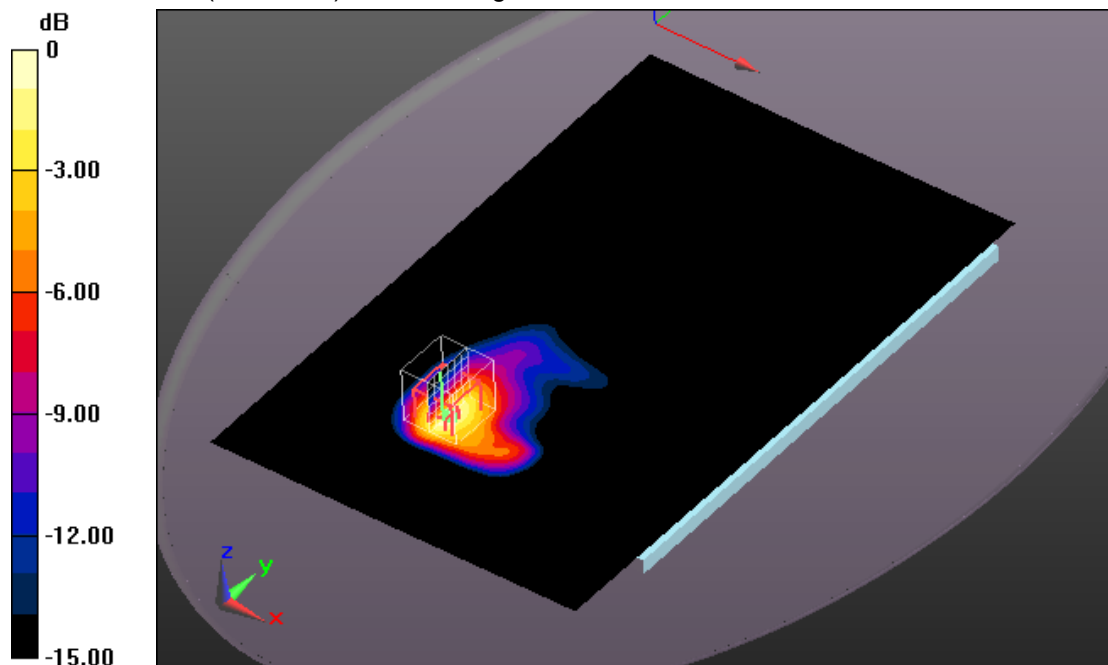

0 dB = 0.888 W/kg = -1.03 dB W/kg

#### Additional information:

position or distance of DUT to SAM: 0 mm

ambient temperature: 21.9°C; liquid temperature: 20.8°C

Date/Time: 18.12.2012 10:57:39

**OET65-GSM1900-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: EDGE (8PSK, TN 0-1-2-3); Communication System Band: PCS 1900; Frequency: 1880 MHz; Communication System PAR: 6.53 dB; PMF: 1.79267

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.2, 4.2, 4.2); Calibrated: 24.08.2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Middle 8PSK/Area Scan (141x221x1):** Interpolatedgrid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.06 W/kg


**Body MSL/Rear Position - Middle 8PSK/Zoom Scan (7x7x7)/Cube 0:**Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 27.815 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.170 mW/g

**SAR(1 g) = 0.911 mW/g; SAR(10 g) = 0.441 mW/g**

Maximum value of SAR (measured) = 1.04 W/kg

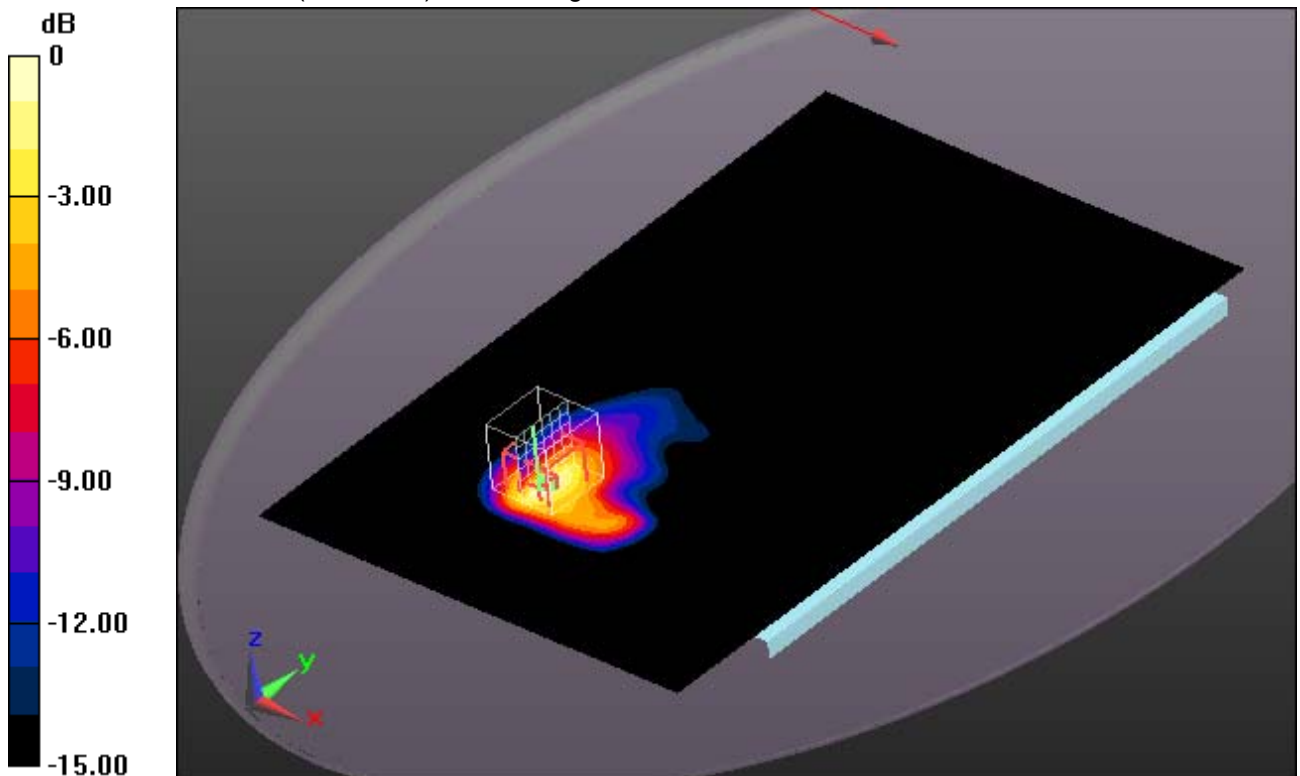

0 dB = 1.04 W/kg = 0.34 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 21.9°C; liquid temperature: 20.8°C

Date/Time: 18.12.2012 11:47:01

## OET65-GSM1900-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: EDGE (8PSK, TN 0-1-2-3); Communication System Band: PCS 1900; Frequency: 1909.8 MHz; Communication System PAR: 6.53 dB; PMF: 1.79267

Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.2, 4.2, 4.2); Calibrated: 24.08.2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### Body MSL/Rear Position - High 8PSK/Area Scan (141x221x1): Interpolated grid:

$dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.848 W/kg

### Body MSL/Rear Position - High 8PSK/Zoom Scan (7x7x7)/Cube 0: Measurement


grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 24.861 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.781 mW/g

**SAR(1 g) = 0.742 mW/g; SAR(10 g) = 0.356 mW/g**

Maximum value of SAR (measured) = 0.849 W/kg

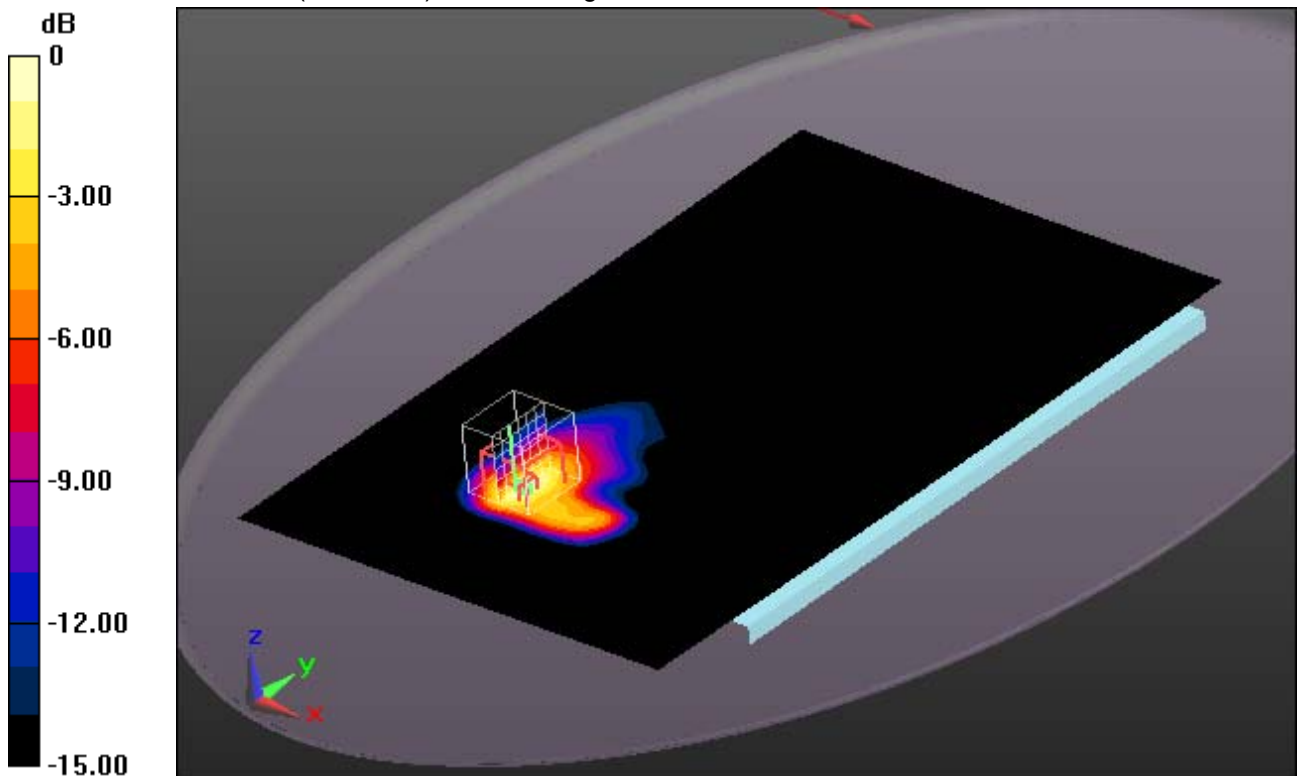

0 dB = 0.849 W/kg = -1.42 dB W/kg

#### Additional information:

position or distance of DUT to SAM: 0 mm

ambient temperature: 21.9°C; liquid temperature: 20.8°C

Date/Time: 18.12.2012 13:07:49

**OET65-GSM1900-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: EDGE (8PSK, TN 0-1-2-3); Communication System Band: PCS 1900; Frequency: 1880 MHz; Communication System PAR: 6.53 dB; PMF: 1.79267

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.2, 4.2, 4.2); Calibrated: 24.08.2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Right Position - Middle 8PSK/Area Scan (81x151x1):** Interpolated grid: $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.804 W/kg


**Body MSL/Right Position - Middle 8PSK/Zoom Scan (7x7x7)/Cube 0:**Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 24.738 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.406 mW/g

**SAR(1 g) = 0.665 mW/g; SAR(10 g) = 0.281 mW/g**

Maximum value of SAR (measured) = 0.811 W/kg

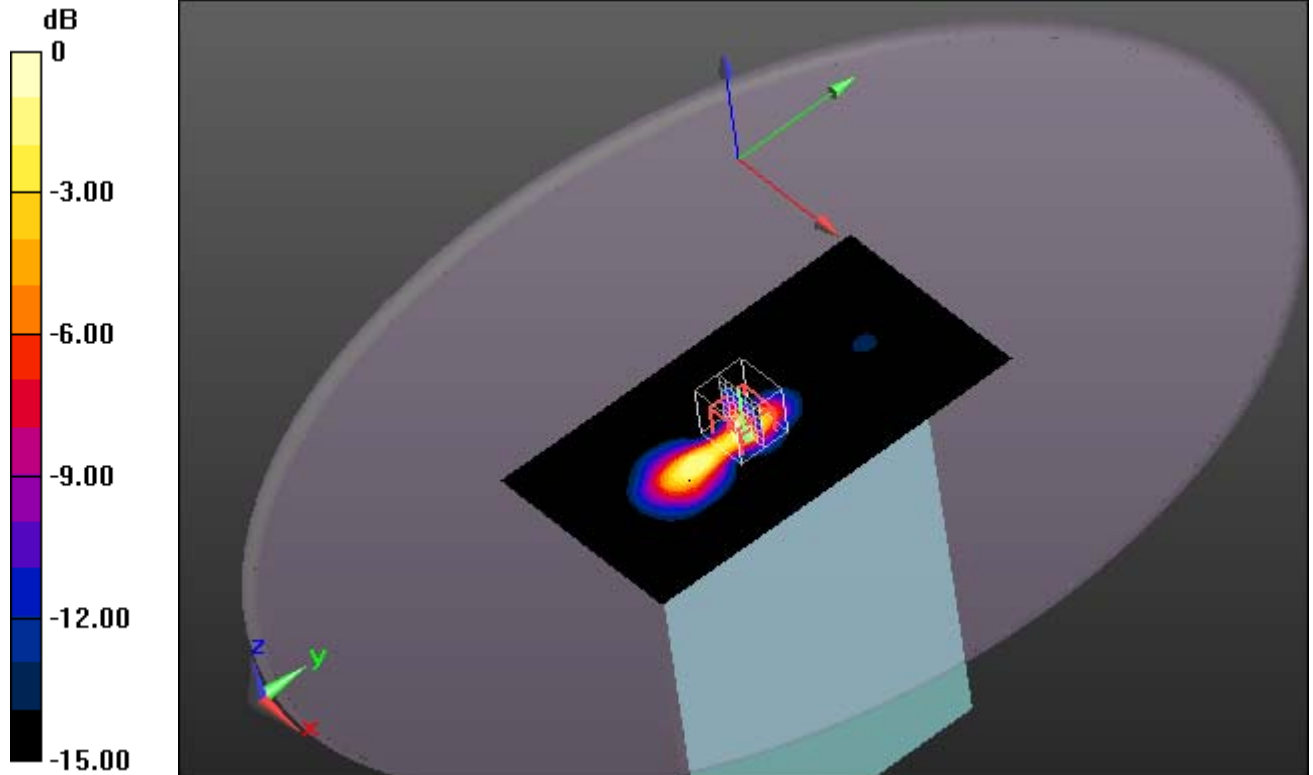

0 dB = 0.811 W/kg = -1.82 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 21.9°C; liquid temperature: 20.8°C

Date/Time: 18.12.2012 12:44:00

## OET65-GSM1900-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: EDGE (**8PSK**, TN 0-1-2-3); Communication System Band: PCS 1900; Frequency: 1880 MHz; Communication System PAR: 6.53 dB; PMF: 1.79267

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.2, 4.2, 4.2); Calibrated: 24.08.2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### Body MSL/Top Position - Middle 8PSK/Area Scan (81x201x1): Interpolated grid:

$dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.0842 W/kg

### Body MSL/Top Position - Middle 8PSK/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 7.532 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.133 mW/g

**SAR(1 g) = 0.082 mW/g; SAR(10 g) = 0.049 mW/g**

Maximum value of SAR (measured) = 0.0899 W/kg

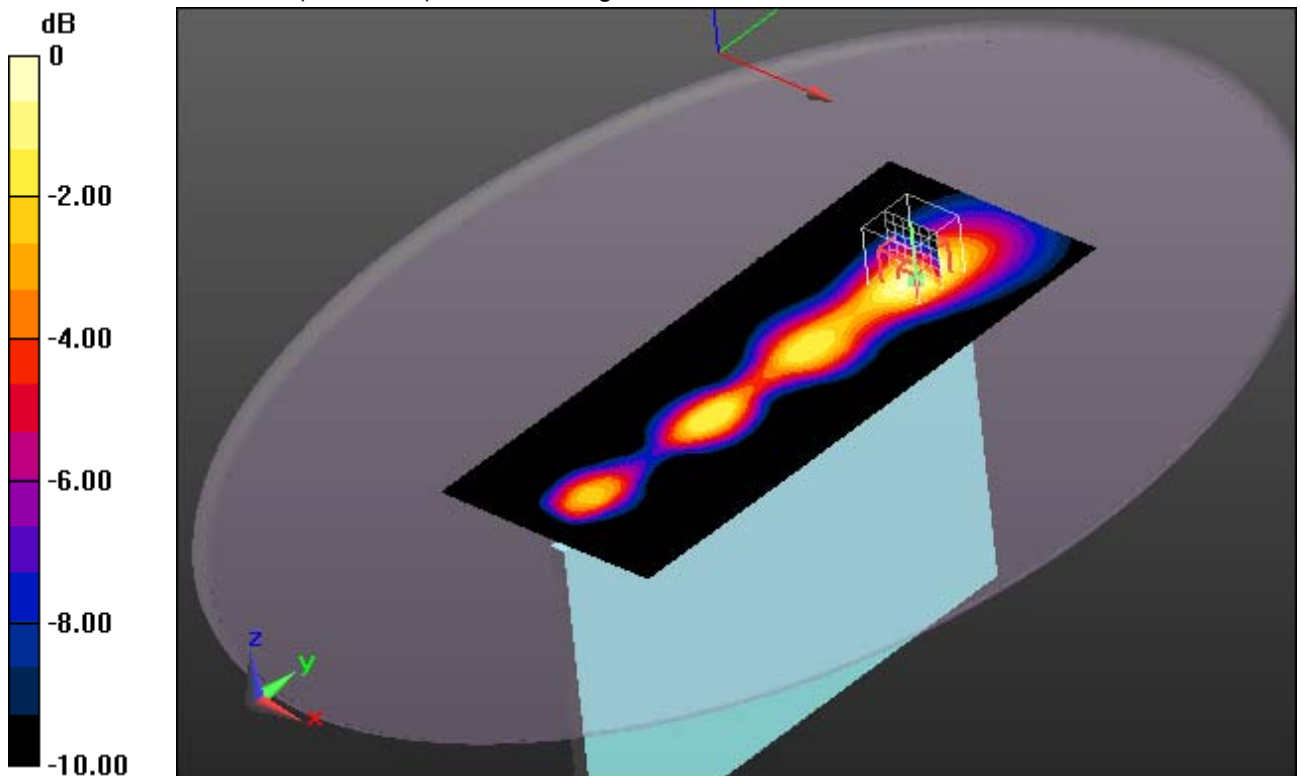

0 dB = 0.0899 W/kg = -20.92 dB W/kg

#### Additional information:

position or distance of DUT to SAM: 0 mm

ambient temperature: 21.9°C; liquid temperature: 20.8°C

Date/Time: 18.12.2012 13:56:47

**OET65-GSM1900-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: EDGE (8PSK, TN 0-1-2-3); Communication System Band: PCS 1900; Frequency: 1880 MHz; Communication System PAR: 6.53 dB; PMF: 1.79267

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.2, 4.2, 4.2); Calibrated: 24.08.2012;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Middle 8PSK WC/Area Scan (141x221x1):**Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.06 W/kg


**Body MSL/Rear Position - Middle 8PSK WC/Zoom Scan (7x7x7)/Cube 0:**Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 25.894 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.842 mW/g

**SAR(1 g) = 0.830 mW/g; SAR(10 g) = 0.435 mW/g**

Maximum value of SAR (measured) = 0.910 W/kg

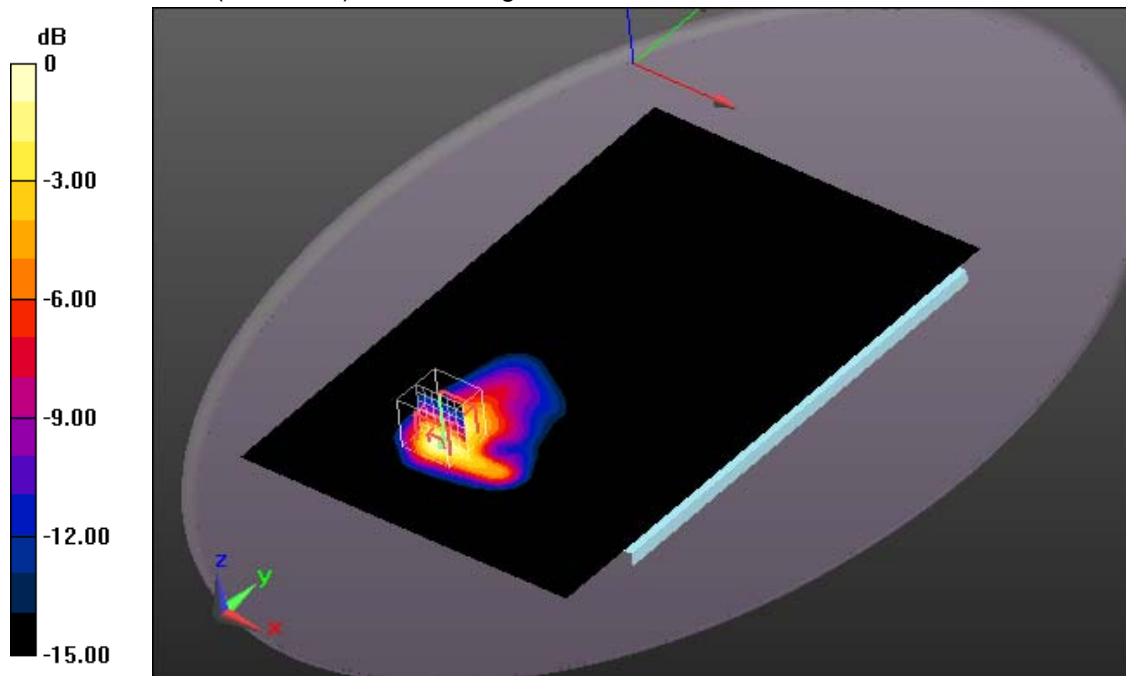

0 dB = 0.910 W/kg = -0.82 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 21.9°C; liquid temperature: 20.8°C

Date/Time: 18.12.2012 10:16:20

**OET65-GSM1900-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**Communication System: GPRS-FDD (TDMA, **GMSK**, TN 0-1-2-3); Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Communication System PAR: 3.55 dB; PMF: 1.50487Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.2, 4.2, 4.2); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X: a=40.6, b=99.4, c=23.0, calibrated PAR=3.6 dB / Y: a=33.7, b=99.5, c=23.1, calibrated PAR=3.6 dB / Z: a=31.5, b=99.5, c=23.6, calibrated PAR=3.6 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.7, 32.7
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Middle/Area Scan (141x221x1):** Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.936 W/kg

**Body MSL/Rear Position - Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.058 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.821 mW/g

**SAR(1 g) = 0.799 mW/g; SAR(10 g) = 0.391 mW/g**

Maximum value of SAR (measured) = 0.922 W/kg

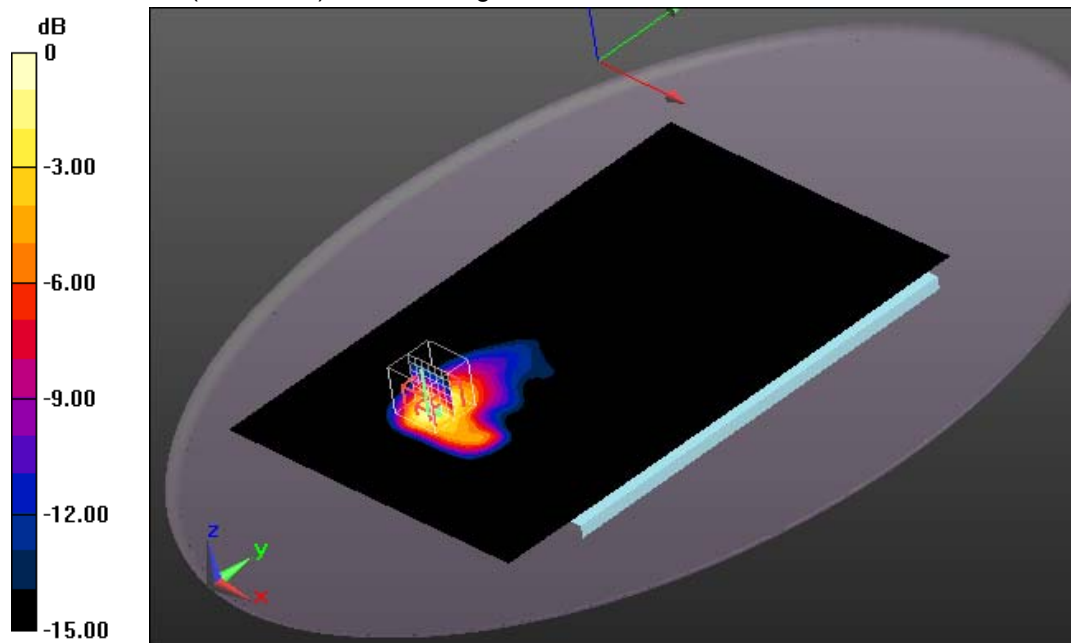

0 dB = 0.922 W/kg = -0.71 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 21.9°C; liquid temperature: 20.8°C

Date/Time: 18.12.2012 13:31:35

**OET65-GSM1900-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**Communication System: GPRS-FDD (TDMA, **GMSK**, TN 0-1-2-3); Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Communication System PAR: 3.55 dB; PMF: 1.50487Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.2, 4.2, 4.2); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X: a=40.6, b=99.4, c=23.0, calibrated PAR=3.6 dB / Y: a=33.7, b=99.5, c=23.1, calibrated PAR=3.6 dB / Z: a=31.5, b=99.5, c=23.6, calibrated PAR=3.6 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.7, 32.7
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Right Side Position - Mid/Area Scan (81x151x1):** Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.708 W/kg

**Body MSL/Right Side Position - Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.505 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.241 mW/g

**SAR(1 g) = 0.601 mW/g; SAR(10 g) = 0.258 mW/g**

Maximum value of SAR (measured) = 0.733 W/kg

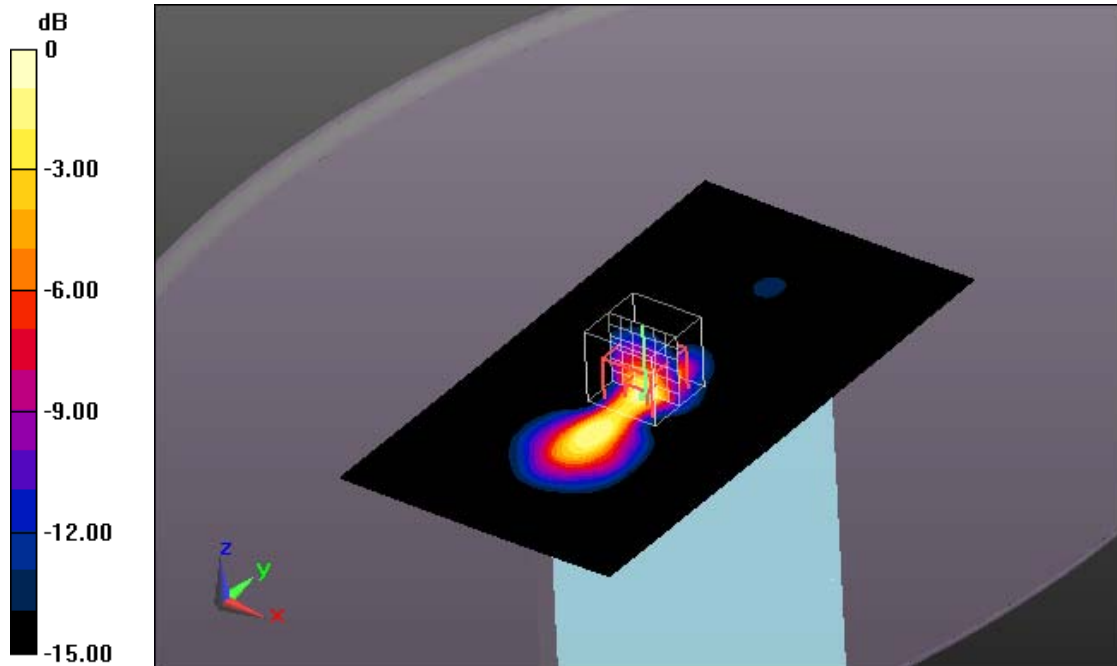

0 dB = 0.733 W/kg = -2.70 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 21.9°C; liquid temperature: 20.8°C

Date/Time: 18.12.2012 12:16:59

**OET65-GSM1900-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**Communication System: GPRS-FDD (TDMA, **GMSK**, TN 0-1-2-3); Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Communication System PAR: 3.55 dB; PMF: 1.50487Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 53.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.2, 4.2, 4.2); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X: a=40.6, b=99.4, c=23.0, calibrated PAR=3.6 dB / Y: a=33.7, b=99.5, c=23.1, calibrated PAR=3.6 dB / Z: a=31.5, b=99.5, c=23.6, calibrated PAR=3.6 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.7, 32.7
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Top Position - Middle/Area Scan (81x201x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0764 W/kg

**Body MSL/Top Position - Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.178 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.119 mW/g

**SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.044 mW/g**

Maximum value of SAR (measured) = 0.0815 W/kg

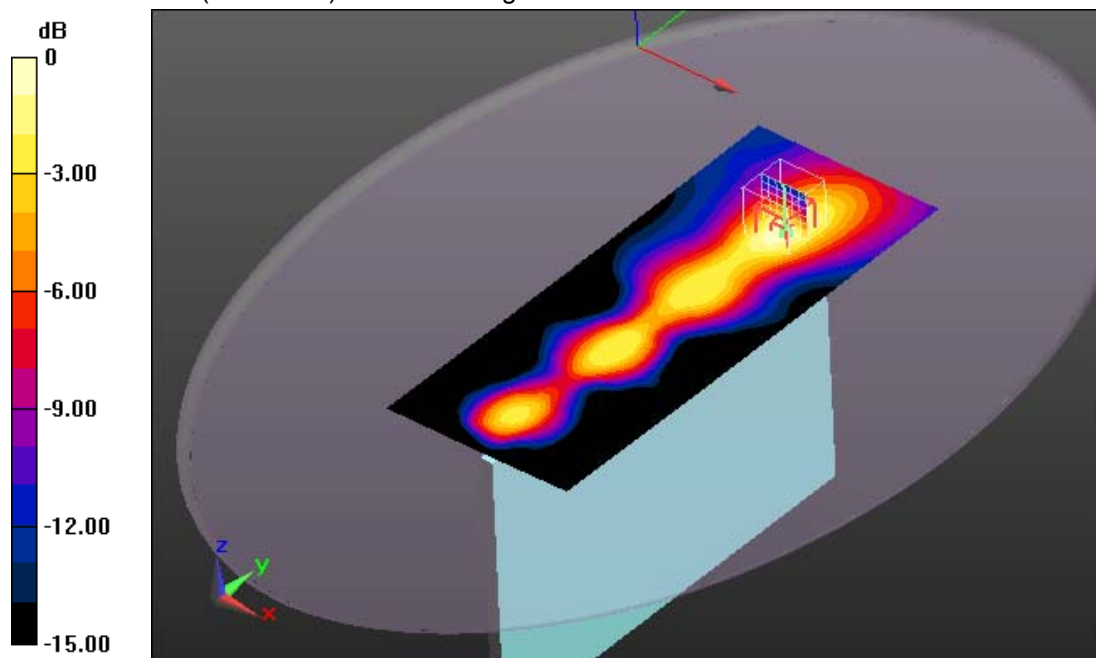

0 dB = 0.0815 W/kg = -21.78 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 21.9°C; liquid temperature: 20.8°C

### Annex B.3: UMTS FDD V 850MHz

Date/Time: 15.12.2012 11:51:11

#### OET65-WCDMA FDD V-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: UMTS-FDD (WCDMA); Communication System Band: Band 5, UTRA/FDD (824.0 - 849.0 MHz); Frequency: 826.4 MHz; Communication System PAR: 2.91 dB; PMF: 1.00231

Medium parameters used (interpolated):  $f = 826.4$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X:  $a=3.22$ ,  $b=66.3$ ,  $c=18.5$ , calibrated PAR=2.9 dB / Y:  $a=3.10$ ,  $b=65.6$ ,  $c=18.0$ , calibrated PAR=2.9 dB / Z:  $a=3.31$ ,  $b=66.5$ ,  $c=18.4$ , calibrated PAR=2.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Low/Area Scan (141x231x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.19 W/kg

**Body MSL/Rear Position - Low/Zoom Scan (8x7x7)/Cube 0:** Measurement grid:


$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 34.890 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.991 mW/g

**SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.558 mW/g**

Maximum value of SAR (measured) = 1.13 W/kg

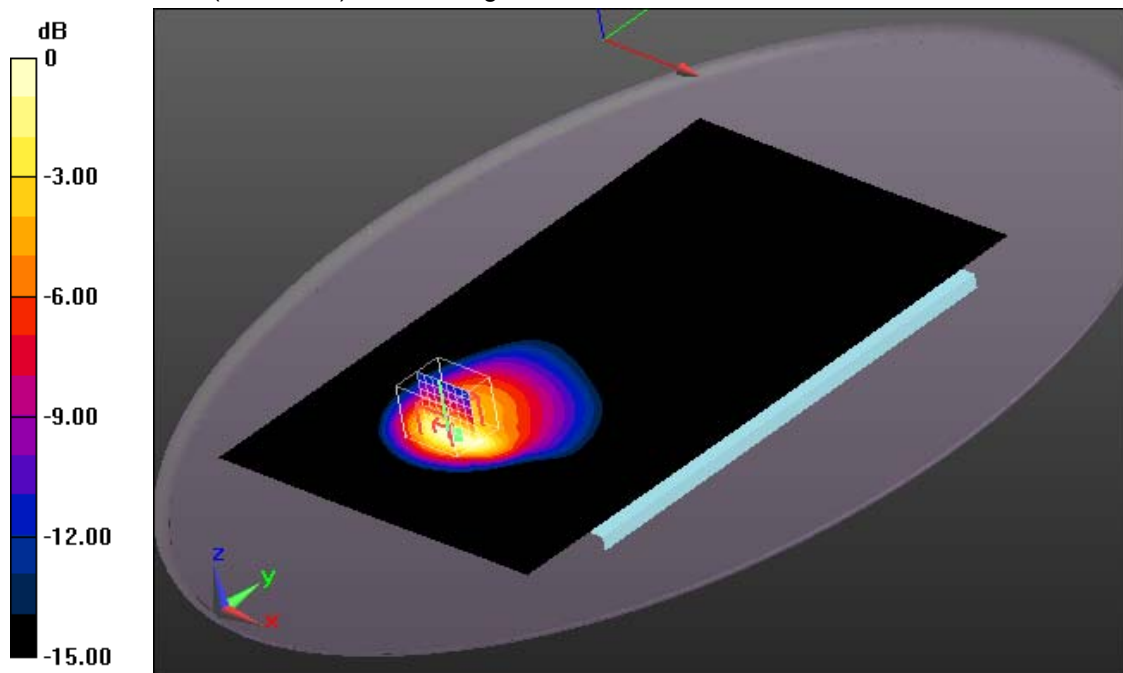

0 dB = 1.13 W/kg = 1.06 dB W/kg

#### Additional information:

position or distance of DUT to SAM: without any distance

ambient temperature: 21.1°C; liquid temperature: 20.7°C

Date/Time: 15.12.2012 11:06:23

**OET65-WCDMA FDD V-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: UMTS-FDD (WCDMA); Communication System Band: Band 5, UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.4 MHz; Communication System PAR: 2.91 dB; PMF: 1.00231

Medium parameters used:  $f = 836.41$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X:  $a=3.22$ ,  $b=66.3$ ,  $c=18.5$ , calibrated PAR=2.9 dB / Y:  $a=3.10$ ,  $b=65.6$ ,  $c=18.0$ , calibrated PAR=2.9 dB / Z:  $a=3.31$ ,  $b=66.5$ ,  $c=18.4$ , calibrated PAR=2.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Middle/Area Scan (141x231x1):** Interpolated grid: $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.28 W/kg


**Body MSL/Rear Position - Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 37.266 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.308 mW/g

**SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.639 mW/g**

Maximum value of SAR (measured) = 1.31 W/kg

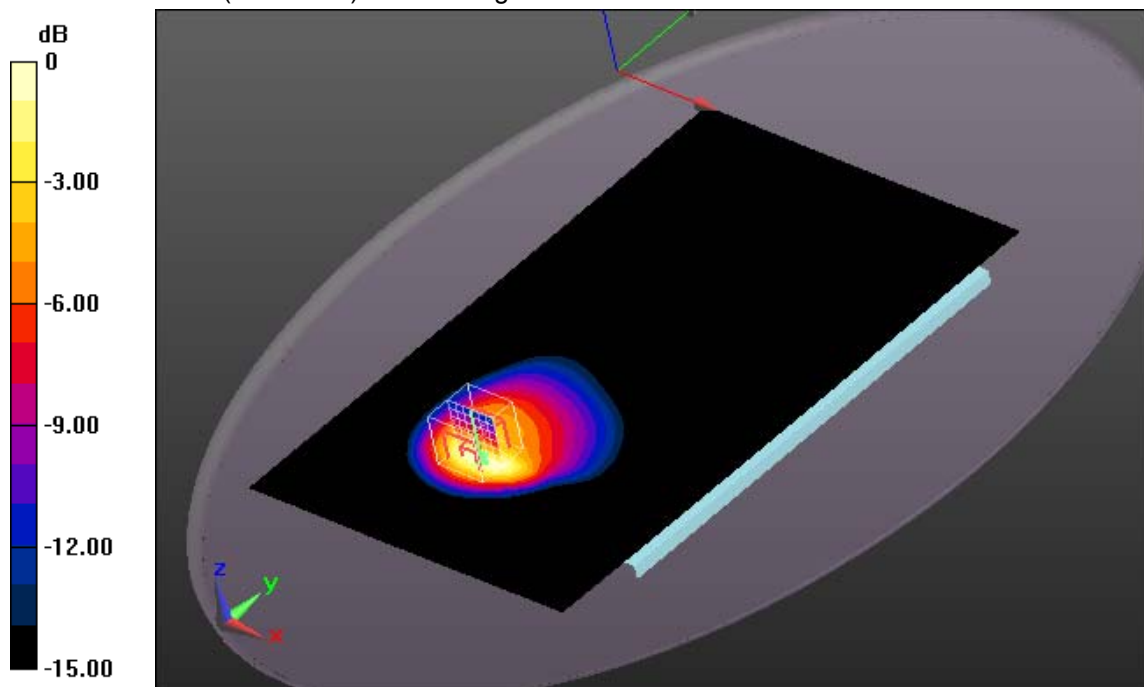

0 dB = 1.31 W/kg = 2.35 dB W/kg

**Additional information:**

position or distance of DUT to SAM: without any distance

ambient temperature: 21.1°C; liquid temperature: 20.7°C

Date/Time: 15.12.2012 12:23:05

## OET65-WCDMA FDD V-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: UMTS-FDD (WCDMA); Communication System Band: Band 5, UTRA/FDD (824.0 - 849.0 MHz); Frequency: 846.6 MHz; Communication System PAR: 2.91 dB; PMF: 1.00231

Medium parameters used (interpolated):  $f = 846.6$  MHz;  $\sigma = 0.988$  mho/m;  $\epsilon_r = 55.325$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X:  $a=3.22$ ,  $b=66.3$ ,  $c=18.5$ , calibrated PAR=2.9 dB / Y:  $a=3.10$ ,  $b=65.6$ ,  $c=18.0$ , calibrated PAR=2.9 dB / Z:  $a=3.31$ ,  $b=66.5$ ,  $c=18.4$ , calibrated PAR=2.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Hi/Area Scan (141x231x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.04 W/kg

**Body MSL/Rear Position - Hi/Zoom Scan (8x7x7)/Cube 0:** Measurement grid:


$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 32.842 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.852 mW/g

**SAR(1 g) = 0.932 mW/g; SAR(10 g) = 0.502 mW/g**

Maximum value of SAR (measured) = 1.04 W/kg

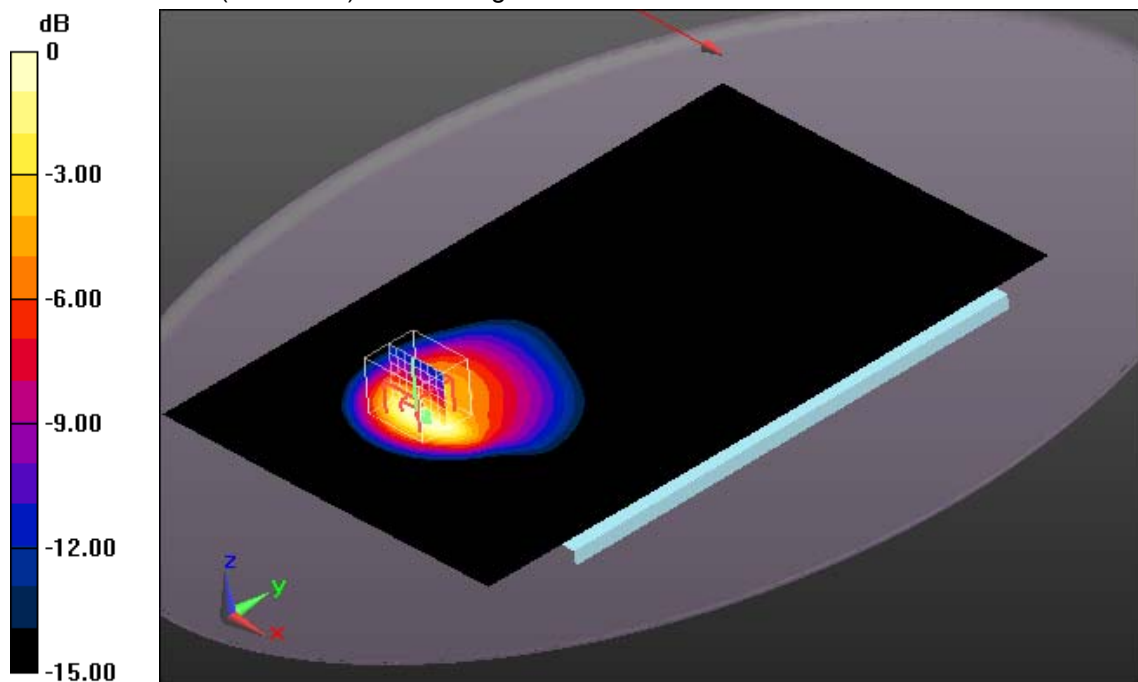

0 dB = 1.04 W/kg = 0.34 dB W/kg

### Additional information:

position or distance of DUT to SAM: without any distance

ambient temperature: 21.1°C; liquid temperature: 20.7°C

Date/Time: 15.12.2012 10:23:35

## OET65-WCDMA FDD V-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: UMTS-FDD (WCDMA); Communication System Band: Band 5, UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 2.91 dB; PMF: 1.00231

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.399$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X:  $a=3.22$ ,  $b=66.3$ ,  $c=18.5$ , calibrated PAR=2.9 dB / Y:  $a=3.10$ ,  $b=65.6$ ,  $c=18.0$ , calibrated PAR=2.9 dB / Z:  $a=3.31$ ,  $b=66.5$ ,  $c=18.4$ , calibrated PAR=2.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### Body MSL/Right Side Position - Mid/Area Scan (81x151x1): Interpolated grid:

$dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.750 W/kg

### Body MSL/Right Side Position - Mid/Zoom Scan (7x8x7)/Cube 0: Measurement


grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 26.203 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.124 mW/g

**SAR(1 g) = 0.625 mW/g; SAR(10 g) = 0.299 mW/g**

Maximum value of SAR (measured) = 0.711 W/kg

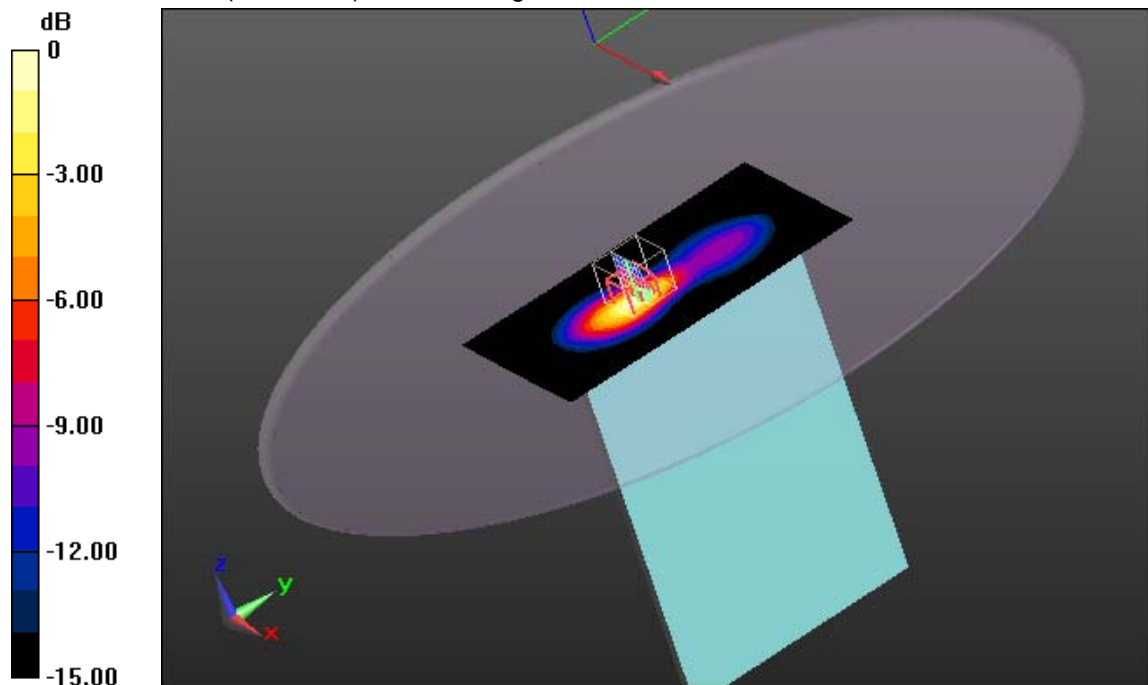

0 dB = 0.711 W/kg = -2.96 dB W/kg

#### Additional information:

position or distance of DUT to SAM: without any distance

ambient temperature: 21.1°C; liquid temperature: 20.7°C

Date/Time: 15.12.2012 09:40:48

## OET65-WCDMA FDD V-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: UMTS-FDD (WCDMA); Communication System Band: Band 5, UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 2.91 dB; PMF: 1.00231

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.399$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X:  $a=3.22$ ,  $b=66.3$ ,  $c=18.5$ , calibrated PAR=2.9 dB / Y:  $a=3.10$ ,  $b=65.6$ ,  $c=18.0$ , calibrated PAR=2.9 dB / Z:  $a=3.31$ ,  $b=66.5$ ,  $c=18.4$ , calibrated PAR=2.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### Body MSL/Top Position - Middle/Area Scan (141x231x1): Interpolated grid:

$dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.109 W/kg

### Body MSL/Top Position - Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 10.799 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.145 mW/g

**SAR(1 g) = 0.103 mW/g; SAR(10 g) = 0.072 mW/g**

Maximum value of SAR (measured) = 0.111 W/kg

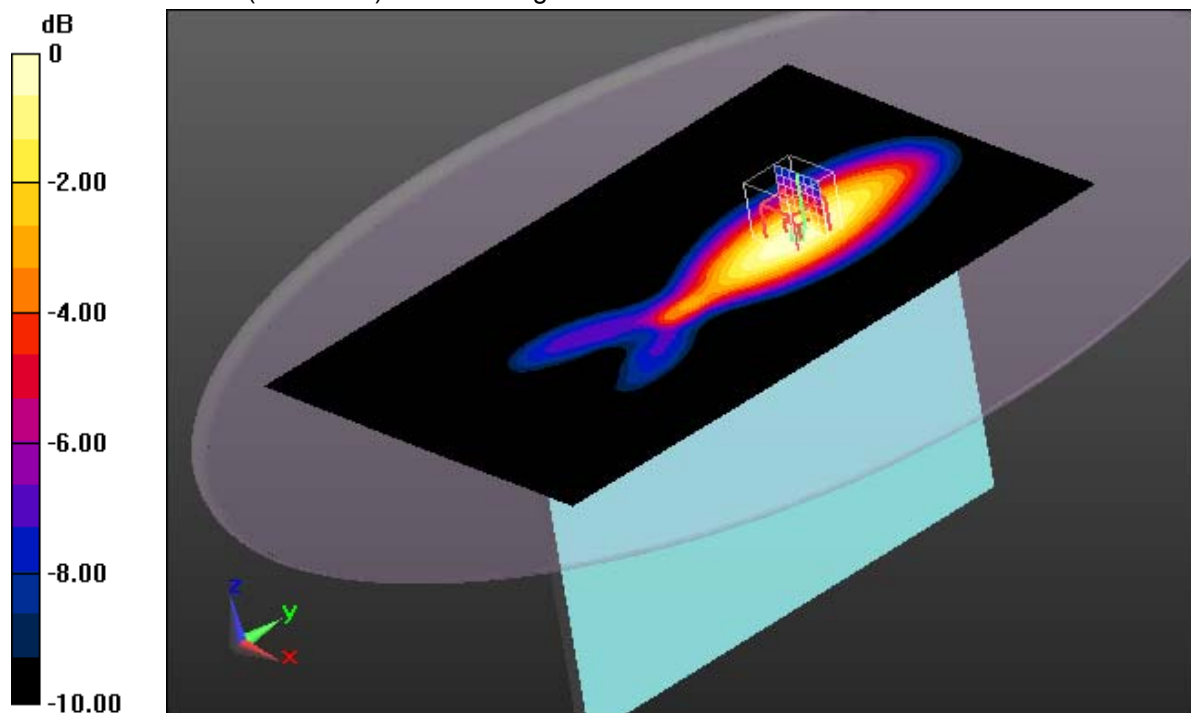

0 dB = 0.111 W/kg = -19.09 dB W/kg

#### Additional information:

position or distance of DUT to SAM: without any distance

ambient temperature: 21.1°C; liquid temperature: 20.7°C

Date/Time: 15.12.2012 12:43:43

## OET65-WCDMA FDD V-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: UMTS-FDD (WCDMA); Communication System Band: Band 5, UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.4 MHz; Communication System PAR: 2.91 dB; PMF: 1.00231

Medium parameters used:  $f = 836.41$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X:  $a=3.22$ ,  $b=66.3$ ,  $c=18.5$ , calibrated PAR=2.9 dB / Y:  $a=3.10$ ,  $b=65.6$ ,  $c=18.0$ , calibrated PAR=2.9 dB / Z:  $a=3.31$ ,  $b=66.5$ ,  $c=18.4$ , calibrated PAR=2.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### Body MSL/Rear Position - Middle wc/Area Scan (141x231x1): Interpolated grid:

$dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 1.18 W/kg

### Body MSL/Rear Position - Middle wc/Zoom Scan (7x7x7)/Cube 0: Measurement


grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 33.239 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.387 mW/g

**SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.655 mW/g**

Maximum value of SAR (measured) = 1.31 W/kg

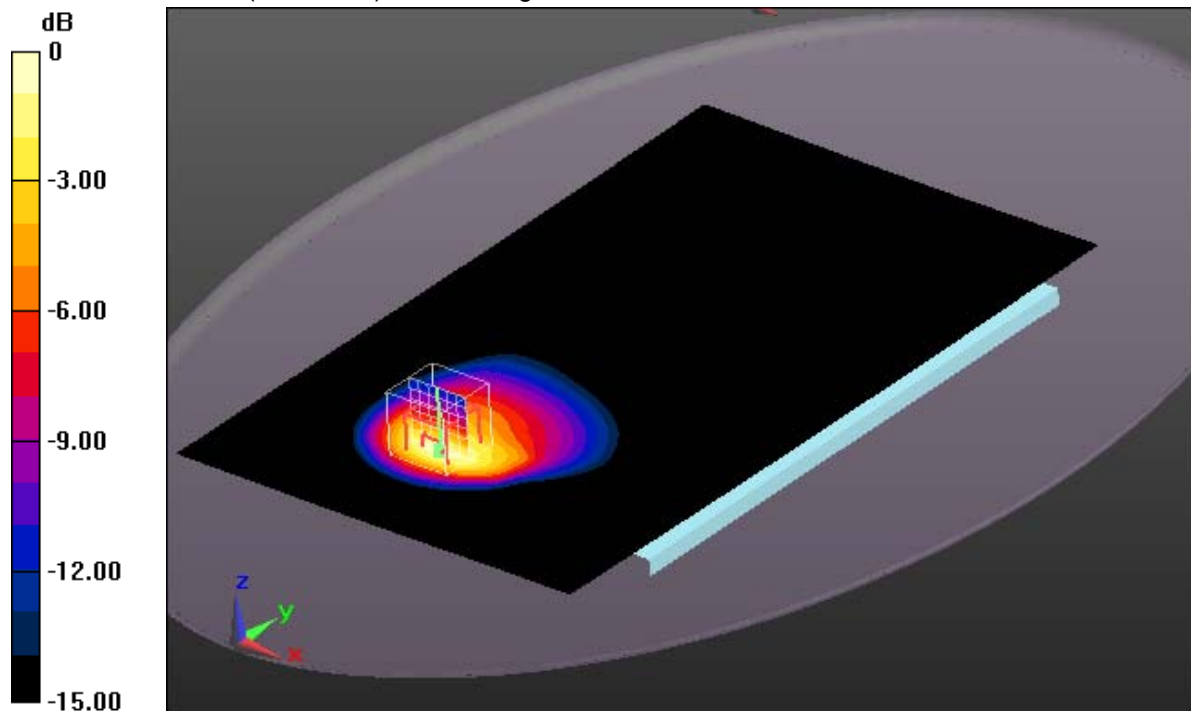

0 dB = 1.31 W/kg = 2.35 dB W/kg

#### Additional information:

position or distance of DUT to SAM: without any distance

ambient temperature: 21.1°C; liquid temperature: 20.7°C

Date/Time: 15.12.2012 13:26:56

## OET65-WCDMA FDD V-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: UMTS-FDD (WCDMA); Communication System Band: Band 5, UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.4 MHz; Communication System PAR: 2.91 dB; PMF: 1.00231

Medium parameters used:  $f = 836.41$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X: a=3.22, b=66.3, c=18.5, calibrated PAR=2.9 dB / Y: a=3.10, b=65.6, c=18.0, calibrated PAR=2.9 dB / Z: a=3.31, b=66.5, c=18.4, calibrated PAR=2.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.7, 32.7
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

## Body MSL/Rear Position - Middle wc with headset/Area Scan (141x231x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.19 W/kg

## Body MSL/Rear Position - Middle wc with headset/Zoom Scan


**(7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.093 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.377 mW/g

**SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.646 mW/g**

Maximum value of SAR (measured) = 1.30 W/kg

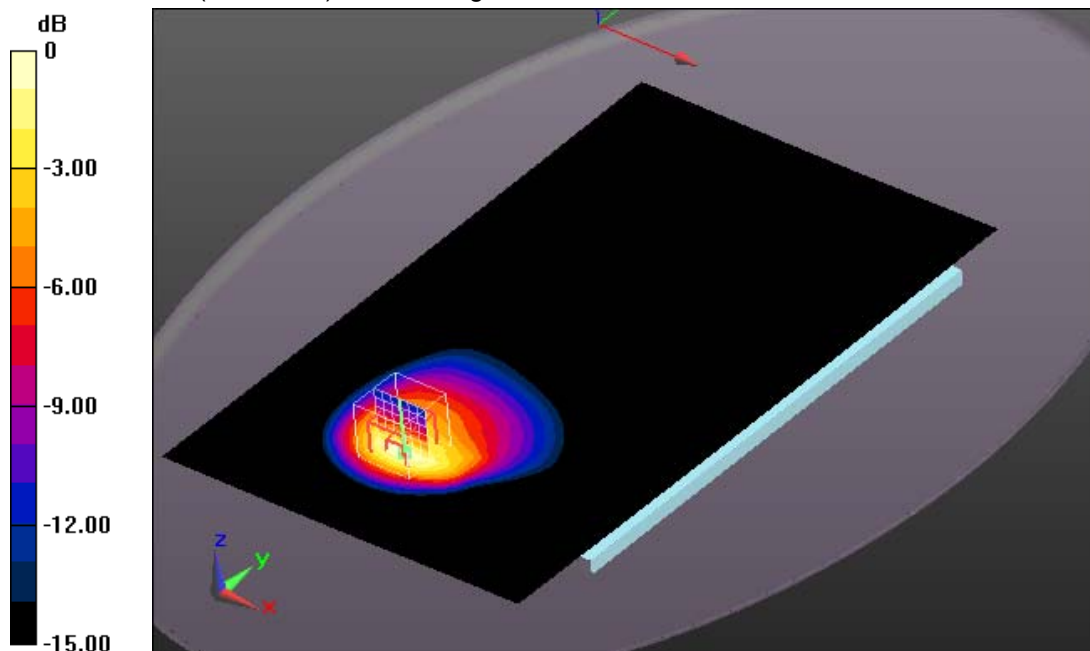

0 dB = 1.30 W/kg = 2.28 dB W/kg

### Additional information:

position or distance of DUT to SAM: without any distance

ambient temperature: 21.1°C; liquid temperature: 20.7°C

Date/Time: 17.12.2012 17:47:28

## OET65- UMTS HSDPA FDD V Body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: UMTS-FDD (WCDMA); Communication System Band: Band 5, UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.4 MHz; Communication System PAR: 2.91 dB; PMF: 1.00231

Medium parameters used:  $f = 836.41$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X:  $a=3.22$ ,  $b=66.3$ ,  $c=18.5$ , calibrated PAR=2.9 dB / Y:  $a=3.10$ ,  $b=65.6$ ,  $c=18.0$ , calibrated PAR=2.9 dB / Z:  $a=3.31$ ,  $b=66.5$ ,  $c=18.4$ , calibrated PAR=2.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### Body MSL/Rear Position - Middle HSDPA/Area Scan (141x221x1): Interpolated

grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.896 W/kg

### Body MSL/Rear Position - Middle HSDPA/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 29.860 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.630 mW/g

**SAR(1 g) = 0.881 mW/g; SAR(10 g) = 0.494 mW/g**

Maximum value of SAR (measured) = 0.961 W/kg

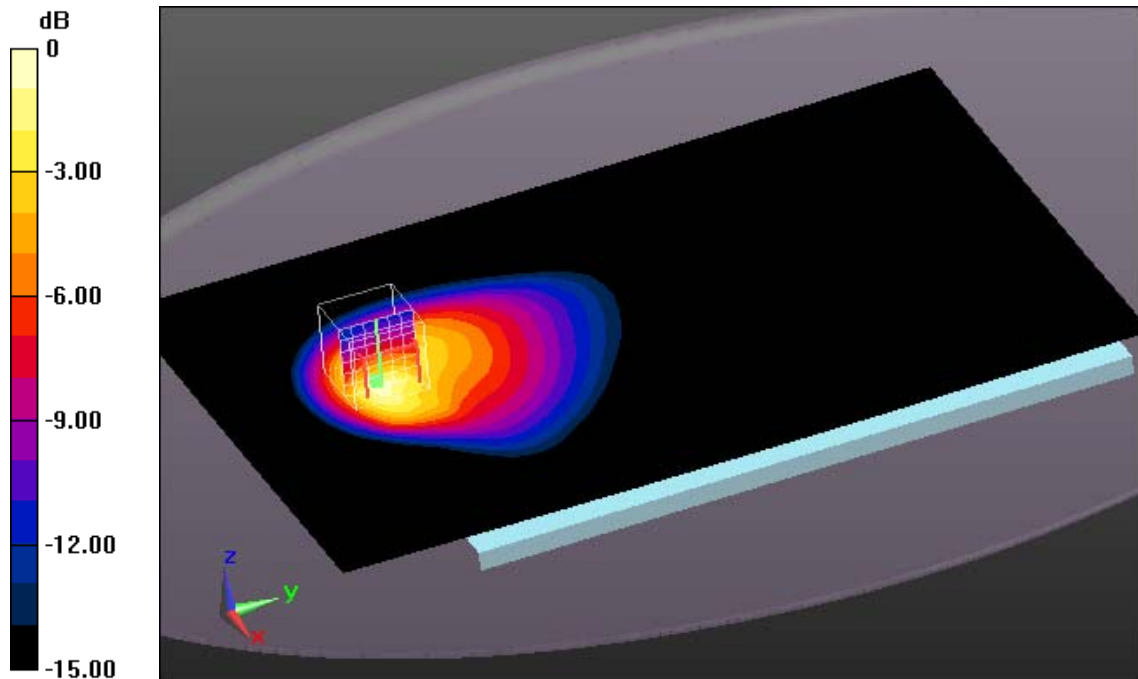

0 dB = 0.961 W/kg = -0.35 dB W/kg

#### Additional information:

position or distance of DUT to SAM: without any distance

ambient temperature: 21.1°C; liquid temperature: 20.7°C

Date/Time: 17.12.2012 18:16:42

## OET65-UMTS HSUPA FDD V Body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW**

Communication System: UMTS-FDD (WCDMA); Communication System Band: Band 5, UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.4 MHz; Communication System PAR: 2.91 dB; PMF: 1.00231

Medium parameters used:  $f = 836.41$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6, 6, 6); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X:  $a=3.22$ ,  $b=66.3$ ,  $c=18.5$ , calibrated PAR=2.9 dB / Y:  $a=3.10$ ,  $b=65.6$ ,  $c=18.0$ , calibrated PAR=2.9 dB / Z:  $a=3.31$ ,  $b=66.5$ ,  $c=18.4$ , calibrated PAR=2.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### Body MSL/Rear Position - Middle HSUPA/Area Scan (141x221x1): Interpolated

grid:  $dx=1.500$  mm,  $dy=1.500$  mm

Maximum value of SAR (interpolated) = 0.918 W/kg

### Body MSL/Rear Position - Middle HSUPA/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 30.006 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.678 mW/g

**SAR(1 g) = 0.893 mW/g; SAR(10 g) = 0.499 mW/g**

Maximum value of SAR (measured) = 0.983 W/kg

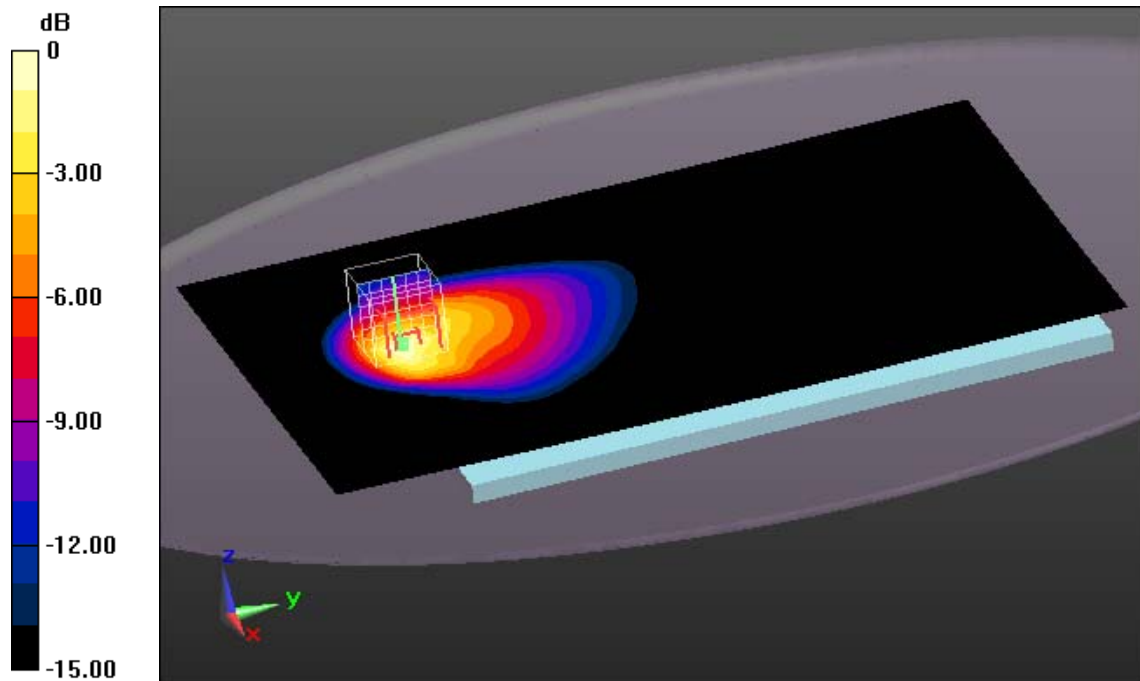

0 dB = 0.983 W/kg = -0.15 dB W/kg

#### Additional information:

position or distance of DUT to SAM: without any distance

ambient temperature: 21.1°C; liquid temperature: 20.7°C

## Annex B.4: WLAN 2450MHz

Date/Time: 19.12.2012 12:15:09

### OET65-WLAN2450-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Communication System Band: ISM 2.4 GHz Band (2400.0 - 2483.5 MHz); Frequency: 2412 MHz; Communication System PAR: 1.87 dB; PMF: 1.04833

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.96$  mho/m;  $\epsilon_r = 52.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.06, 4.06, 4.06); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X:  $a=2.76$ ,  $b=67.0$ ,  $c=18.1$ , calibrated PAR=1.9 dB / Y:  $a=2.60$ ,  $b=66.5$ ,  $c=17.9$ , calibrated PAR=1.9 dB / Z:  $a=2.38$ ,  $b=64.1$ ,  $c=16.5$ , calibrated PAR=1.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Low/Area Scan (211x331x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.10 W/kg

**Body MSL/Rear Position - Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 22.917 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.175 mW/g

**SAR(1 g) = 0.984 mW/g; SAR(10 g) = 0.365 mW/g**

Maximum value of SAR (measured) = 1.04 W/kg

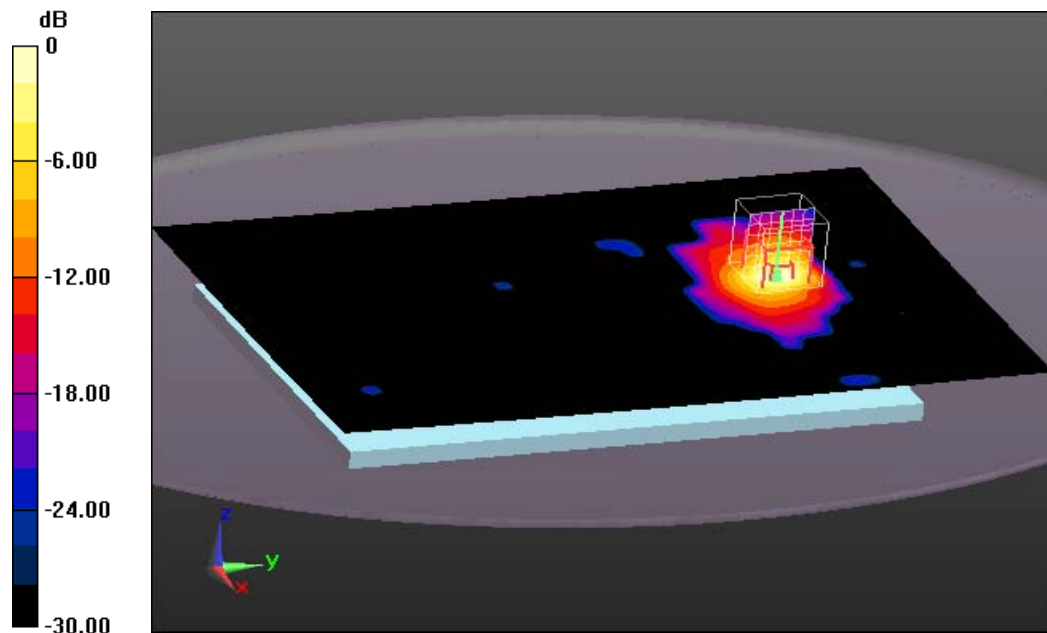

0 dB = 1.04 W/kg = 0.34 dB W/kg

#### Additional information:

position or distance of DUT to SAM: without any distance

ambient temperature: 23.2°C; liquid temperature: 20.9°C

Date/Time: 19.12.2012 10:59:05

**OET65-WLAN2450-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Communication System Band: ISM 2.4 GHz Band (2400.0 - 2483.5 MHz); Frequency: 2437 MHz; Communication System PAR: 1.87 dB; PMF: 1.04833

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.99$  mho/m;  $\epsilon_r = 52.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.06, 4.06, 4.06); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X:  $a=2.76$ ,  $b=67.0$ ,  $c=18.1$ , calibrated PAR=1.9 dB / Y:  $a=2.60$ ,  $b=66.5$ ,  $c=17.9$ , calibrated PAR=1.9 dB / Z:  $a=2.38$ ,  $b=64.1$ ,  $c=16.5$ , calibrated PAR=1.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Middle/Area Scan (211x331x1):** Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.44 W/kg

**Body MSL/Rear Position - Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.063 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.714 mW/g

**SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.462 mW/g**

Maximum value of SAR (measured) = 1.33 W/kg

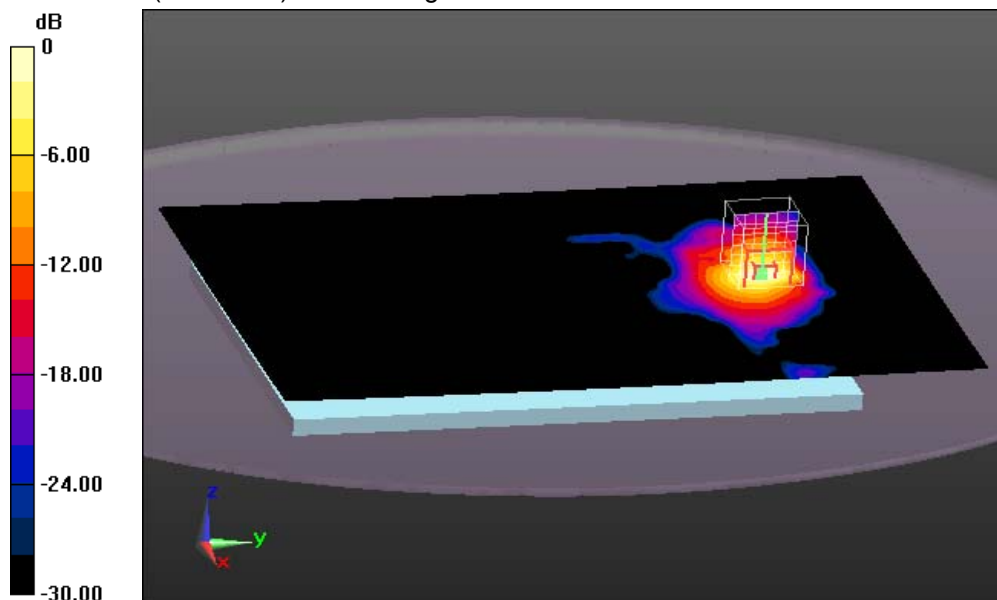

0 dB = 1.33 W/kg = 2.48 dB W/kg

**Additional information:**

position or distance of DUT to SAM: without any distance

ambient temperature: 23.2°C; liquid temperature: 20.9°C

Date/Time: 19.12.2012 12:59:21

**OET65-WLAN2450-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Communication System Band: ISM 2.4 GHz Band (2400.0 - 2483.5 MHz); Frequency: 2462 MHz; Communication System PAR: 1.87 dB; PMF: 1.04833

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 2.01$  mho/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.06, 4.06, 4.06); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X: a=2.76, b=67.0, c=18.1, calibrated PAR=1.9 dB / Y: a=2.60, b=66.5, c=17.9, calibrated PAR=1.9 dB / Z: a=2.38, b=64.1, c=16.5, calibrated PAR=1.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), z = 2.7, 32.7
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Hi/Area Scan (211x331x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.25 W/kg

**Body MSL/Rear Position - Hi/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.088 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.114 mW/g

**SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.388 mW/g**

Maximum value of SAR (measured) = 1.06 W/kg

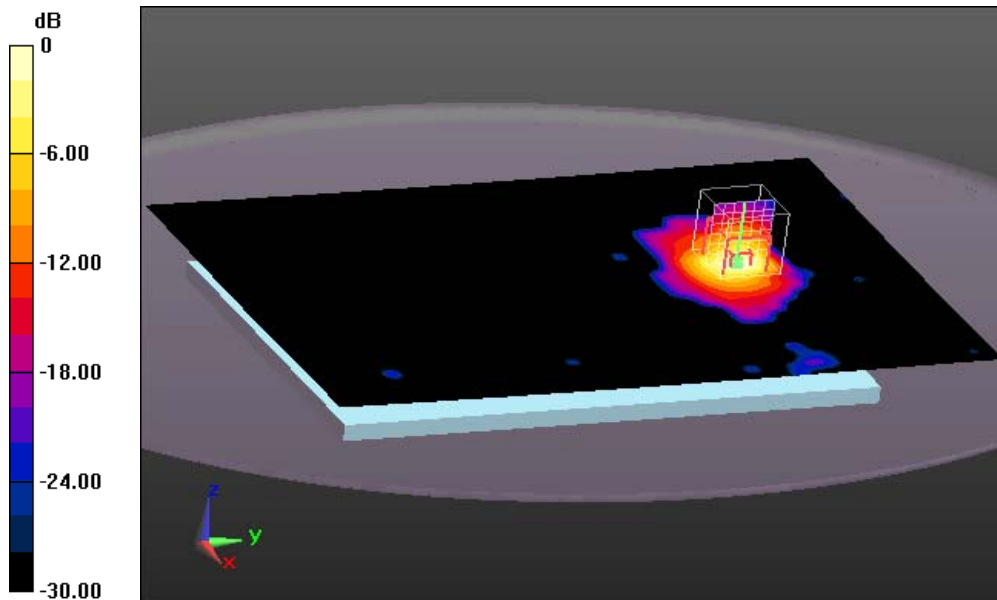

0 dB = 1.06 W/kg = 0.51 dB W/kg

**Additional information:**

position or distance of DUT to SAM: without any distance

ambient temperature: 23.2°C; liquid temperature: 20.9°C

Date/Time: 19.12.2012 10:10:05

**OET65-WLAN2450-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Communication System Band: ISM 2.4 GHz Band (2400.0 - 2483.5 MHz); Frequency: 2437 MHz; Communication System PAR: 1.87 dB; PMF: 1.04833

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.99$  mho/m;  $\epsilon_r = 52.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.06, 4.06, 4.06); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X:  $a=2.76$ ,  $b=67.0$ ,  $c=18.1$ , calibrated PAR=1.9 dB / Y:  $a=2.60$ ,  $b=66.5$ ,  $c=17.9$ , calibrated PAR=1.9 dB / Z:  $a=2.38$ ,  $b=64.1$ ,  $c=16.5$ , calibrated PAR=1.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Left Side Position - Mid/Area Scan (121x201x1):** Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.148 W/kg

**Body MSL/Left Side Position - Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.674 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.351 mW/g

**SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.064 mW/g**

Maximum value of SAR (measured) = 0.148 W/kg

**Body MSL/Left Side Position - Mid/Zoom Scan (7x7x7)/Cube 1:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.674 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.362 mW/g

**SAR(1 g) = 0.126 mW/g; SAR(10 g) = 0.052 mW/g**

Maximum value of SAR (measured) = 0.139 W/kg

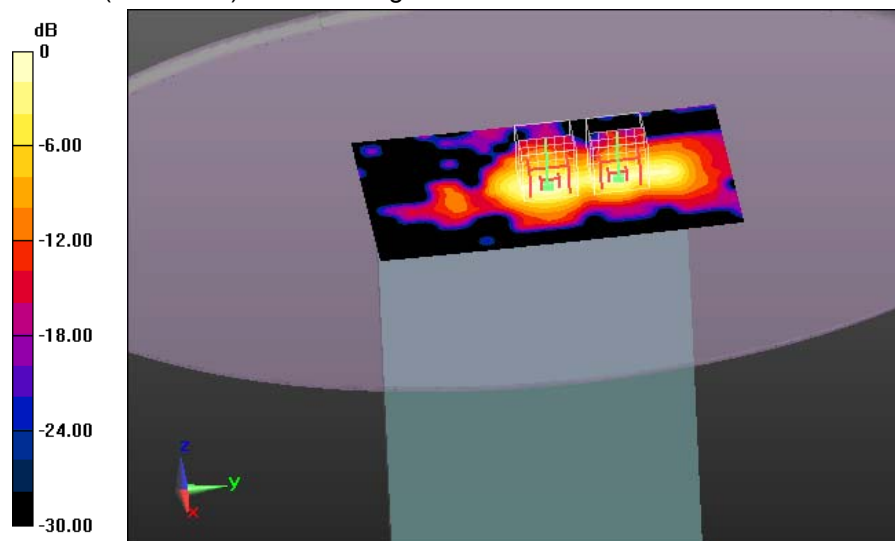

0 dB = 0.139 W/kg = -17.14 dB W/kg

**Additional information:**

position or distance of DUT to SAM: without any distance

ambient temperature: 23.2°C; liquid temperature: 20.9°C

Date/Time: 19.12.2012 14:21:14

**OET65-WLAN2450-body****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Communication System Band: ISM 2.4 GHz Band (2400.0 - 2483.5 MHz); Frequency: 2437 MHz; Communication System PAR: 1.87 dB; PMF: 1.04833

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.99$  mho/m;  $\epsilon_r = 52.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.06, 4.06, 4.06); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X:  $a=2.76$ ,  $b=67.0$ ,  $c=18.1$ , calibrated PAR=1.9 dB / Y:  $a=2.60$ ,  $b=66.5$ ,  $c=17.9$ , calibrated PAR=1.9 dB / Z:  $a=2.38$ ,  $b=64.1$ ,  $c=16.5$ , calibrated PAR=1.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**Body MSL/Rear Position - Middle with extended TV antenna/Area Scan****(211x331x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.29 W/kg


**Body MSL/Rear Position - Middle with extended TV antenna/Zoom Scan****(7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 24.249 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.266 mW/g

**SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.428 mW/g**

Maximum value of SAR (measured) = 1.16 W/kg

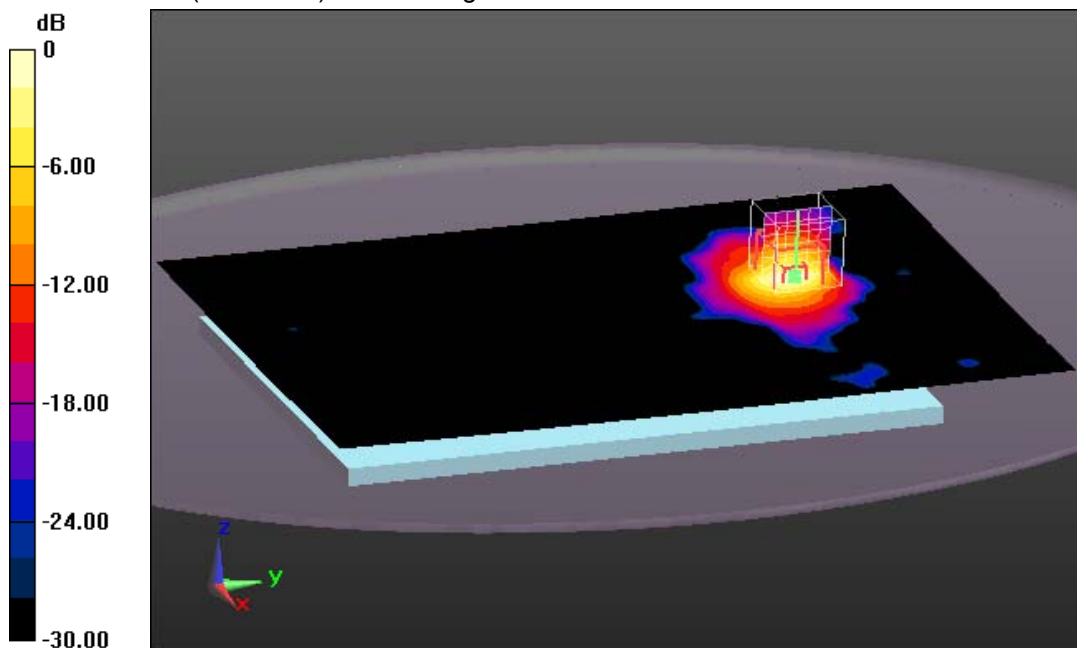

0 dB = 1.16 W/kg = 1.29 dB W/kg

**Additional information:**

position or distance of DUT to SAM: without any distance

ambient temperature: 23.2°C; liquid temperature: 20.9°C

Date/Time: 19.12.2012 15:02:04

## OET65-WLAN2450-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Communication System Band: ISM 2.4 GHz Band (2400.0 - 2483.5 MHz); Frequency: 2437 MHz; Communication System PAR: 1.87 dB; PMF: 1.04833

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.99$  mho/m;  $\epsilon_r = 52.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.06, 4.06, 4.06); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X:  $a=2.76$ ,  $b=67.0$ ,  $c=18.1$ , calibrated PAR=1.9 dB / Y:  $a=2.60$ ,  $b=66.5$ ,  $c=17.9$ , calibrated PAR=1.9 dB / Z:  $a=2.38$ ,  $b=64.1$ ,  $c=16.5$ , calibrated PAR=1.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### Body MSL/Rear Position - Middle with headset/Area Scan (211x331x1):

Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.11 W/kg

### Body MSL/Rear Position - Middle with headset/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 22.380 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.913 mW/g

**SAR(1 g) = 1 mW/g; SAR(10 g) = 0.394 mW/g**

Maximum value of SAR (measured) = 1.05 W/kg

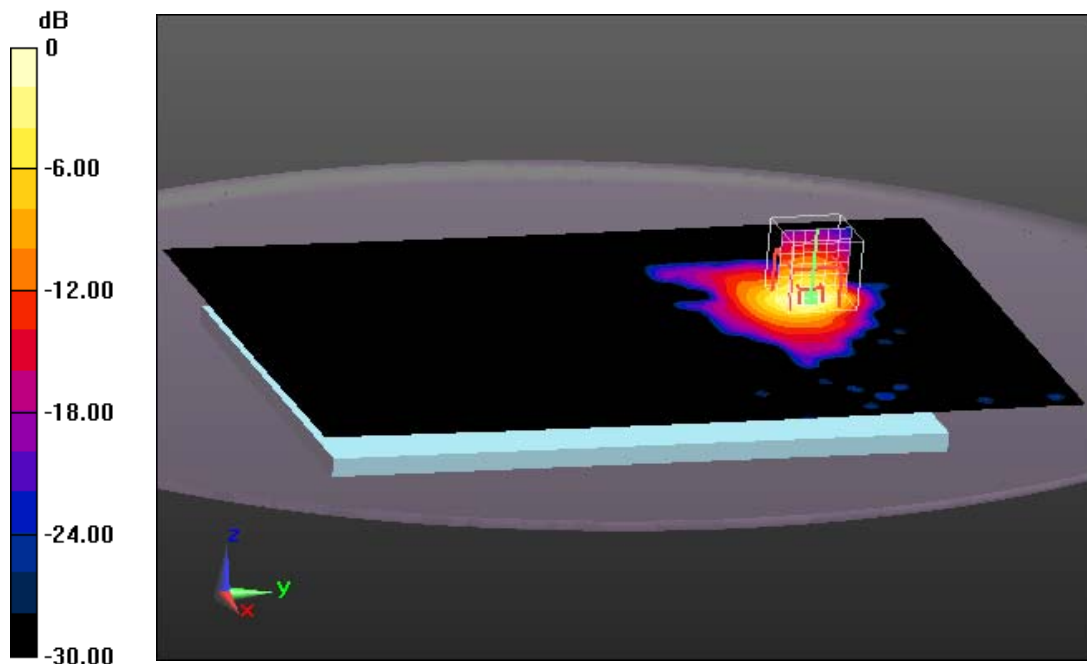

0 dB = 1.05 W/kg = 0.42 dB W/kg

#### Additional information:

position or distance of DUT to SAM: without any distance, with headset

ambient temperature: 23.2°C; liquid temperature: 20.9°C

Date/Time: 19.12.2012 15:42:56

## OET65-WLAN2450-body

**DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Communication System Band: ISM 2.4 GHz Band (2400.0 - 2483.5 MHz); Frequency: 2437 MHz; Communication System PAR: 1.87 dB; PMF: 1.04833

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.99$  mho/m;  $\epsilon_r = 52.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.06, 4.06, 4.06); Calibrated: 24.08.2012;
- Modulation Compensation: PMR (X:  $a=2.76$ ,  $b=67.0$ ,  $c=18.1$ , calibrated PAR=1.9 dB / Y:  $a=2.60$ ,  $b=66.5$ ,  $c=17.9$ , calibrated PAR=1.9 dB / Z:  $a=2.38$ ,  $b=64.1$ ,  $c=16.5$ , calibrated PAR=1.9 dB); Calibrated: 24.08.2012
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 2.7, 32.7$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### Body MSL/Rear Position - Middle WC/Area Scan (211x331x1): Interpolated grid:

$dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.19 W/kg

### Body MSL/Rear Position - Middle WC/Zoom Scan (7x7x7)/Cube 0: Measurement


grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 23.819 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.254 mW/g

**SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.418 mW/g**

Maximum value of SAR (measured) = 1.14 W/kg

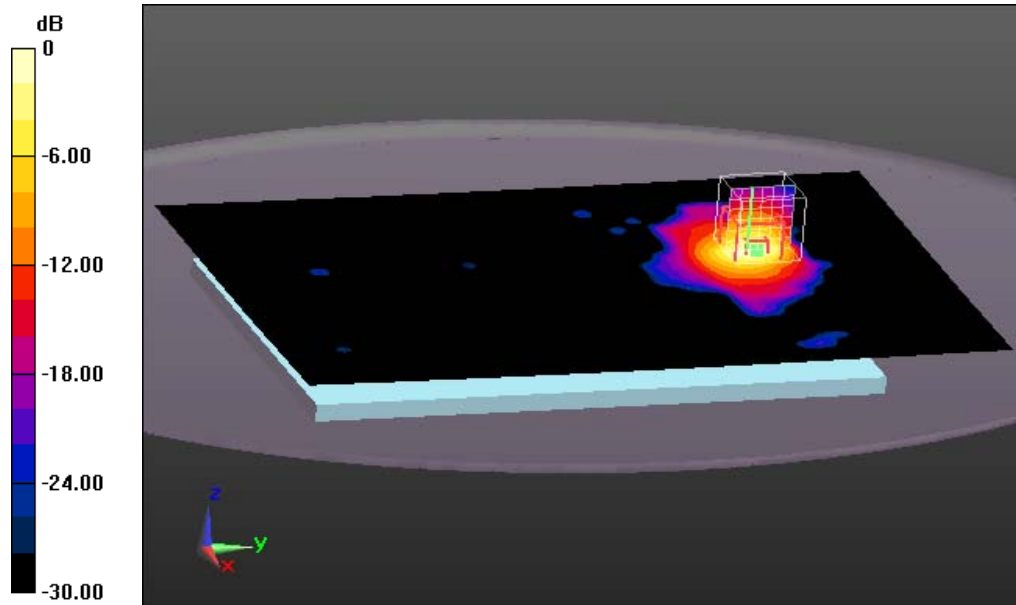

0 dB = 1.14 W/kg = 1.14 dB W/kg

#### Additional information:

position or distance of DUT to SAM: without any distance

ambient temperature: 23.2°C; liquid temperature: 20.9°C

## Annex B.5: WLAN 5GHz

Date/Time: 05.01.2013 12:58:50

### OET65\_EN62209-2-Body-WLAN 5GHz

DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Communication System Band: 5 GHz Band (5030.0 - 5825.0 MHz); Frequency: 5180 MHz; Communication System PAR: 8.69 dB; PMF: 1.07895

Medium parameters used:  $f = 5180$  MHz;  $\sigma = 5.34$  mho/m;  $\epsilon_r = 48.02$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.5, 3.5, 3.5); Calibrated: 23.08.2012;
- Modulation Compensation: PMR (X: a=10.1, b=68.5, c=21.4, calibrated PAR=8.7 dB / Y: a=9.85, b=67.7, c=21.0, calibrated PAR=8.7 dB / Z: a=9.78, b=67.8, c=21.2, calibrated PAR=8.7 dB); Calibrated: 23.08.2012
- Sensor-Surface: 2mm (Mechanical Surface Detection), z = 1.0, 23.0
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### MSL-5GHz/Rear position - Channel 36/Area Scan (201x291x1): Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.41 W/kg

### MSL-5GHz/Rear position - Channel 36/Zoom Scan (8x8x12)/Cube 0:


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.005 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.438 mW/g

**SAR(1 g) = 0.489 mW/g; SAR(10 g) = 0.125 mW/g**

Maximum value of SAR (measured) = 1.19 W/kg

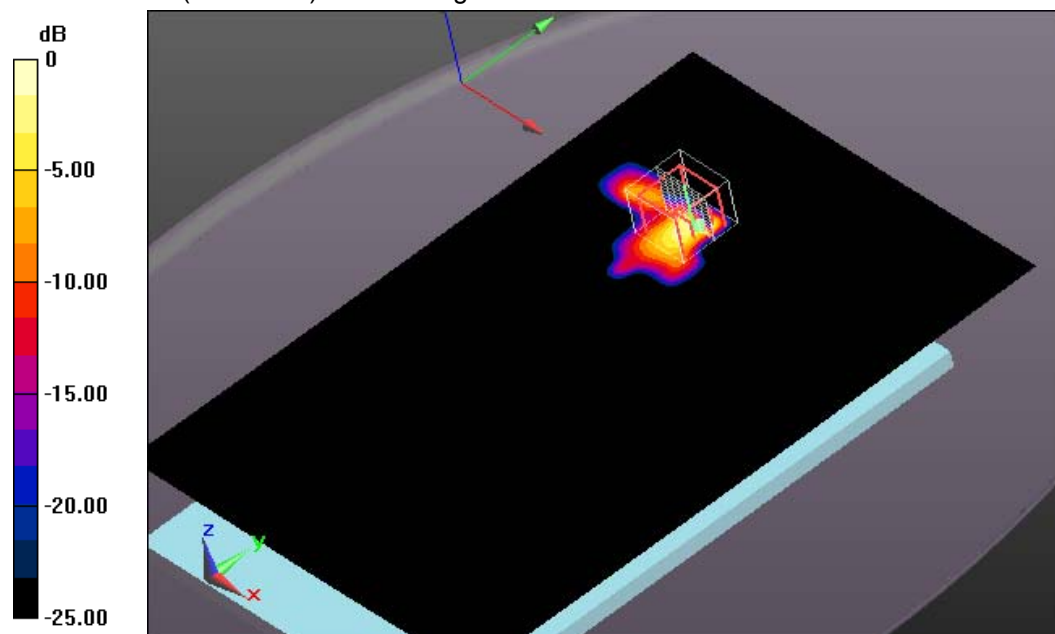

0 dB = 1.19 W/kg = 1.51 dB W/kg

#### Additional information:

position or distance of DUT to SAM: 0 mm

ambient temperature: 23.5°C; liquid temperature: 21.7°C

Date/Time: 05.01.2013 14:17:51

## OET65\_EN62209-2-Body-WLAN 5GHz

DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Communication System Band: 5 GHz Band (5030.0 - 5825.0 MHz); Frequency: 5260 MHz; Communication System PAR: 8.69 dB; PMF: 1.07895

Medium parameters used:  $f = 5260$  MHz;  $\sigma = 5.41$  mho/m;  $\epsilon_r = 47.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.35, 3.35, 3.35); Calibrated: 23.08.2012;
- Modulation Compensation: PMR (X:  $a=10.1$ ,  $b=68.5$ ,  $c=21.4$ , calibrated PAR=8.7 dB / Y:  $a=9.85$ ,  $b=67.7$ ,  $c=21.0$ , calibrated PAR=8.7 dB / Z:  $a=9.78$ ,  $b=67.8$ ,  $c=21.2$ , calibrated PAR=8.7 dB); Calibrated: 23.08.2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

### MSL-5GHz/Rear position - Channel 52/Area Scan (201x291x1): Interpolated grid:

$dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.76 W/kg

### MSL-5GHz/Rear position - Channel 52/Zoom Scan (9x9x12)/Cube 0:


Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 12.922 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 3.289 mW/g

**SAR(1 g) = 0.650 mW/g; SAR(10 g) = 0.160 mW/g**

Maximum value of SAR (measured) = 1.53 W/kg

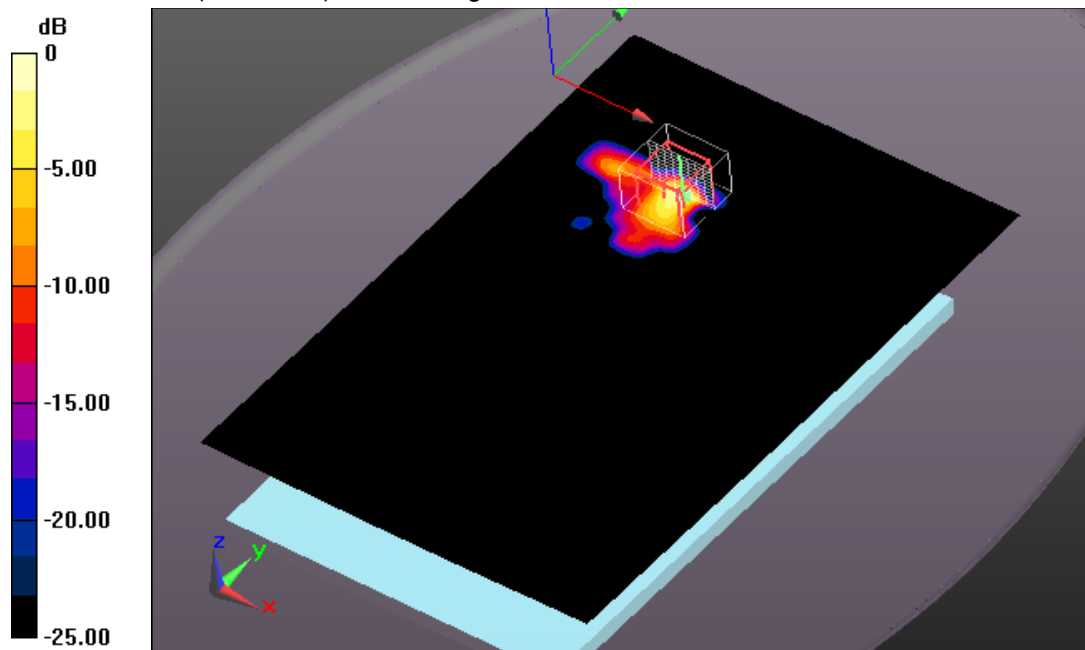

0 dB = 1.53 W/kg = 3.69 dB W/kg

#### Additional information:

position or distance of DUT to SAM: 0 mm

ambient temperature: 23.5°C; liquid temperature: 21.7°C

Date/Time: 05.01.2013 15:08:51

**OET65\_EN62209-2-Body-WLAN 5GHz****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Communication System Band: 5 GHz Band (5030.0 - 5825.0 MHz); Frequency: 5560 MHz; Communication System PAR: 8.69 dB; PMF: 1.07895

Medium parameters used:  $f = 5560$  MHz;  $\sigma = 5.78$  mho/m;  $\epsilon_r = 47.17$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.1, 3.1, 3.1); Calibrated: 23.08.2012;
- Modulation Compensation: PMR (X:  $a=10.1$ ,  $b=68.5$ ,  $c=21.4$ , calibrated PAR=8.7 dB / Y:  $a=9.85$ ,  $b=67.7$ ,  $c=21.0$ , calibrated PAR=8.7 dB / Z:  $a=9.78$ ,  $b=67.8$ ,  $c=21.2$ , calibrated PAR=8.7 dB); Calibrated: 23.08.2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**MSL-5GHz/Rear position - Channel 112/Area Scan (201x291x1):** Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.79 W/kg

**MSL-5GHz/Rear position - Channel 112/Zoom Scan (9x8x12)/Cube 0:**


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.796 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 4.471 mW/g

**SAR(1 g) = 0.756 mW/g; SAR(10 g) = 0.175 mW/g**

Maximum value of SAR (measured) = 1.90 W/kg

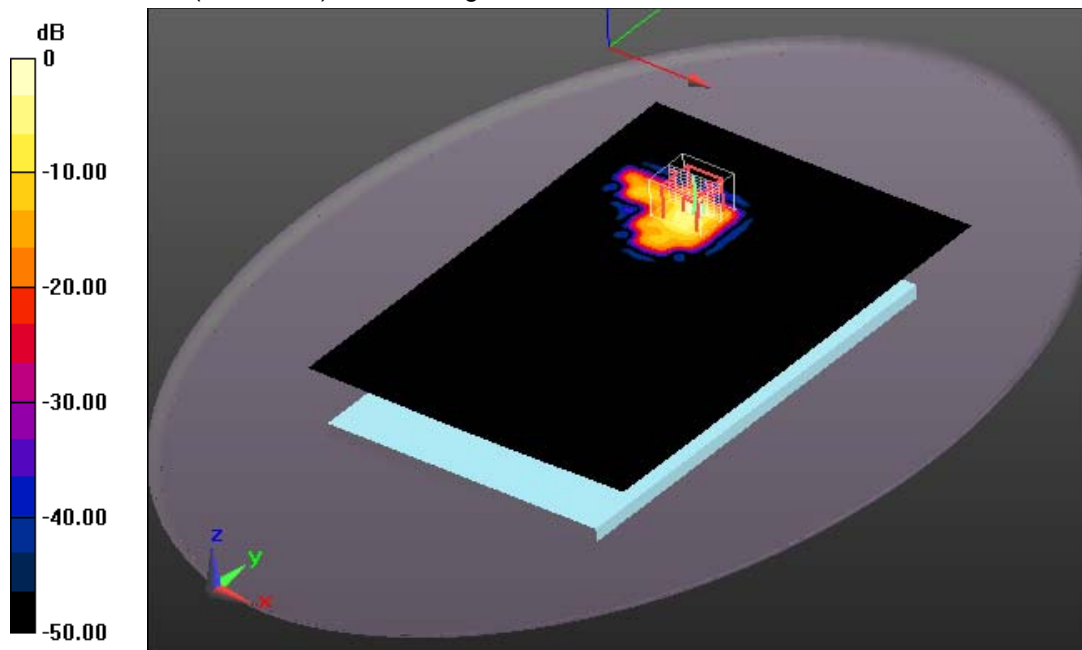

0 dB = 1.90 W/kg = 5.58 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 23.5°C; liquid temperature: 21.7°C

Date/Time: 05.01.2013 15:58:53

**OET65\_EN62209-2-Body-WLAN 5GHz****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Communication System Band: 5 GHz Band (5030.0 - 5825.0 MHz); Frequency: 5745 MHz; Communication System PAR: 8.69 dB; PMF: 1.07895

Medium parameters used:  $f = 5745$  MHz;  $\sigma = 6.01$  mho/m;  $\epsilon_r = 46.75$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.12, 3.12, 3.12); Calibrated: 23.08.2012;
- Modulation Compensation: PMR (X: a=10.1, b=68.5, c=21.4, calibrated PAR=8.7 dB / Y: a=9.85, b=67.7, c=21.0, calibrated PAR=8.7 dB / Z: a=9.78, b=67.8, c=21.2, calibrated PAR=8.7 dB); Calibrated: 23.08.2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), z = 1.0, 23.0
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**MSL-5GHz/Rear position - Channel 149/Area Scan (201x291x1):** Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.82 W/kg

**MSL-5GHz/Rear position - Channel 149/Zoom Scan (8x8x12)/Cube 0:**


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 14.513 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 4.842 mW/g

**SAR(1 g) = 0.894 mW/g; SAR(10 g) = 0.205 mW/g**

Maximum value of SAR (measured) = 2.24 W/kg

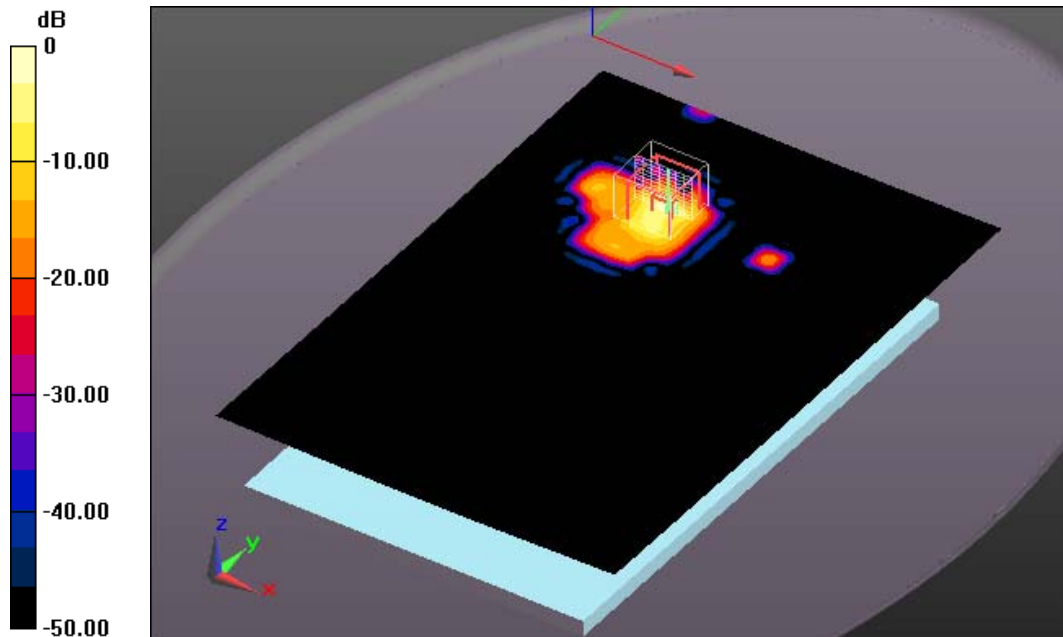

0 dB = 2.24 W/kg = 7.00 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 23.5°C; liquid temperature: 21.7°C

Date/Time: 05.01.2013 16:47:51

**OET65\_EN62209-2-Body-WLAN 5GHz****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Communication System Band: 5 GHz Band (5030.0 - 5825.0 MHz); Frequency: 5785 MHz; Communication System PAR: 8.69 dB; PMF: 1.07895

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 6.08$  mho/m;  $\epsilon_r = 46.71$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.12, 3.12, 3.12); Calibrated: 23.08.2012;
- Modulation Compensation: PMR (X:  $a=10.1$ ,  $b=68.5$ ,  $c=21.4$ , calibrated PAR=8.7 dB / Y:  $a=9.85$ ,  $b=67.7$ ,  $c=21.0$ , calibrated PAR=8.7 dB / Z:  $a=9.78$ ,  $b=67.8$ ,  $c=21.2$ , calibrated PAR=8.7 dB); Calibrated: 23.08.2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**MSL-5GHz/Rear position - Channel 157/Area Scan (201x291x1):** Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.03 W/kg

**MSL-5GHz/Rear position - Channel 157/Zoom Scan (8x8x12)/Cube 0:**


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.025 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 4.566 mW/g

**SAR(1 g) = 0.830 mW/g; SAR(10 g) = 0.187 mW/g**

Maximum value of SAR (measured) = 1.90 W/kg

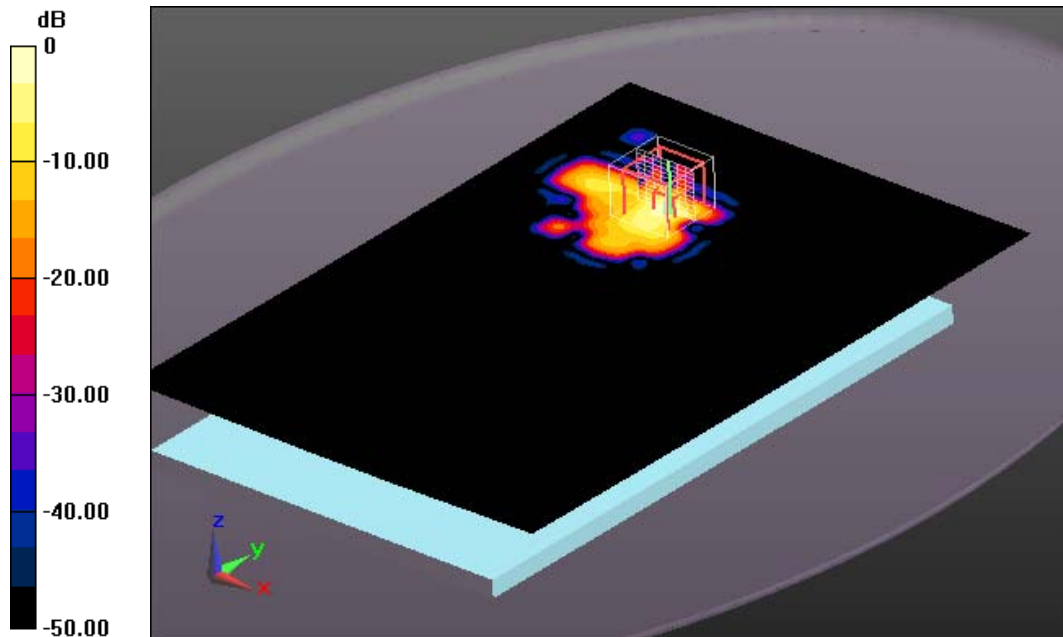

0 dB = 1.90 W/kg = 5.58 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 23.5°C; liquid temperature: 21.7°C

Date/Time: 05.01.2013 17:08:51

**OET65\_EN62209-2-Body-WLAN 5GHz****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Communication System Band: 5 GHz Band (5030.0 - 5825.0 MHz); Frequency: 5825 MHz; Communication System PAR: 8.69 dB; PMF: 1.07895

Medium parameters used:  $f = 5825$  MHz;  $\sigma = 6.15$  mho/m;  $\epsilon_r = 46.66$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.12, 3.12, 3.12); Calibrated: 23.08.2012;
- Modulation Compensation: PMR (X:  $a=10.1$ ,  $b=68.5$ ,  $c=21.4$ , calibrated PAR=8.7 dB / Y:  $a=9.85$ ,  $b=67.7$ ,  $c=21.0$ , calibrated PAR=8.7 dB / Z:  $a=9.78$ ,  $b=67.8$ ,  $c=21.2$ , calibrated PAR=8.7 dB); Calibrated: 23.08.2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**MSL-5GHz/Rear position - Channel 165/Area Scan (201x291x1):** Interpolated grid:

dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.81 W/kg

**MSL-5GHz/Rear position - Channel 165/Zoom Scan (9x8x12)/Cube 0:**


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.420 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.861 mW/g

**SAR(1 g) = 0.721 mW/g; SAR(10 g) = 0.161 mW/g**

Maximum value of SAR (measured) = 1.62 W/kg

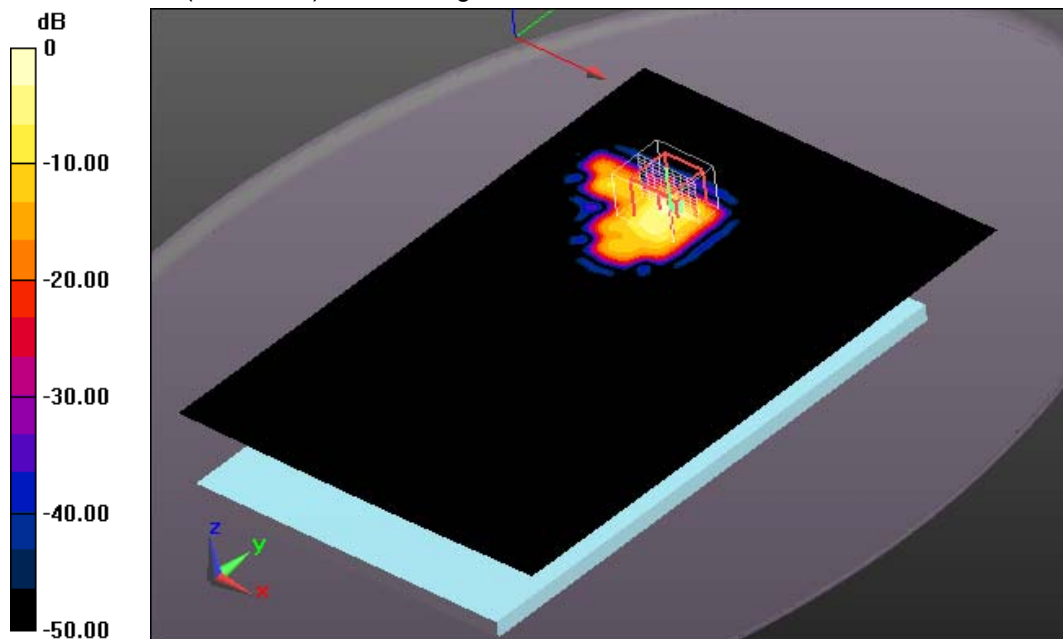

0 dB = 1.62 W/kg = 4.19 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 23.5°C; liquid temperature: 21.7°C

Date/Time: 05.01.2013 11:22:53

**OET65\_EN62209-2-Body-WLAN 5GHz****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Communication System Band: 5 GHz Band (5030.0 - 5825.0 MHz); Frequency: 5180 MHz; Communication System PAR: 8.69 dB; PMF: 1.07895

Medium parameters used:  $f = 5180$  MHz;  $\sigma = 5.34$  mho/m;  $\epsilon_r = 48.02$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.5, 3.5, 3.5); Calibrated: 23.08.2012;
- Modulation Compensation: PMR (X:  $a=10.1$ ,  $b=68.5$ ,  $c=21.4$ , calibrated PAR=8.7 dB / Y:  $a=9.85$ ,  $b=67.7$ ,  $c=21.0$ , calibrated PAR=8.7 dB / Z:  $a=9.78$ ,  $b=67.8$ ,  $c=21.2$ , calibrated PAR=8.7 dB); Calibrated: 23.08.2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**MSL-5GHz/Left Side Position - Channel 36/Area Scan (121x221x1):** Interpolatedgrid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.294 W/kg


**MSL-5GHz/Left Side Position - Channel 36/Zoom Scan (8x12x12)/Cube 0:**Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 5.622 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.474 mW/g

**SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.032 mW/g**

Maximum value of SAR (measured) = 0.264 W/kg

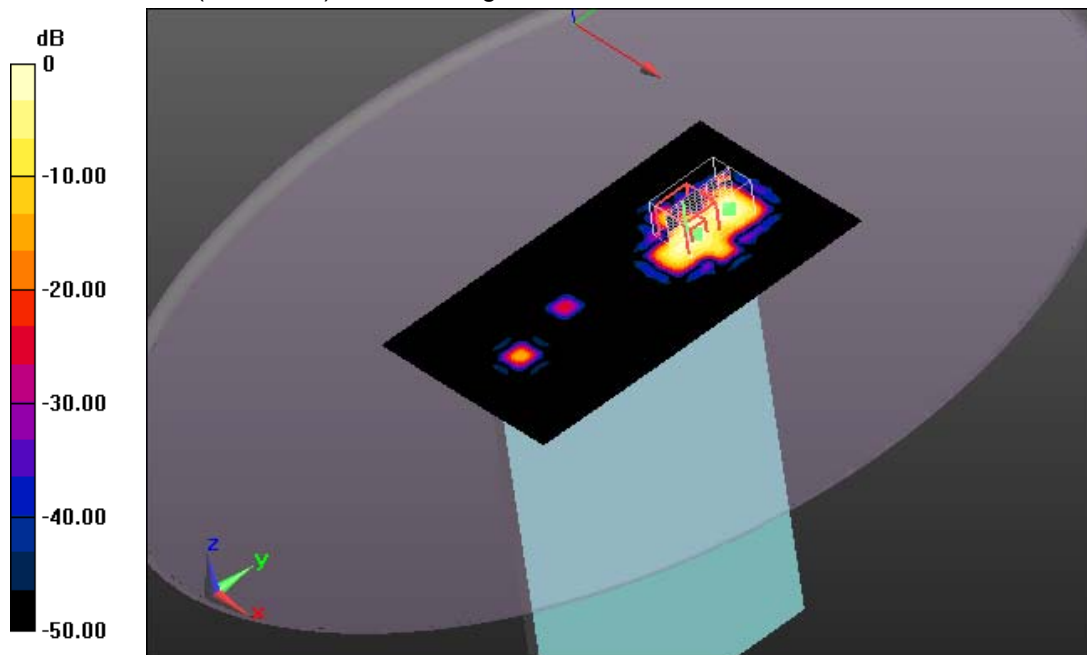

0 dB = 0.264 W/kg = -11.57 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 23.5°C; liquid temperature: 21.7°C

Date/Time: 05.01.2013 12:11:23

**OET65\_EN62209-2-Body-WLAN 5GHz****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Communication System Band: 5 GHz Band (5030.0 - 5825.0 MHz); Frequency: 5260 MHz; Communication System PAR: 8.69 dB; PMF: 1.07895

Medium parameters used:  $f = 5260$  MHz;  $\sigma = 5.41$  mho/m;  $\epsilon_r = 47.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.35, 3.35, 3.35); Calibrated: 23.08.2012;
- Modulation Compensation: PMR (X:  $a=10.1$ ,  $b=68.5$ ,  $c=21.4$ , calibrated PAR=8.7 dB / Y:  $a=9.85$ ,  $b=67.7$ ,  $c=21.0$ , calibrated PAR=8.7 dB / Z:  $a=9.78$ ,  $b=67.8$ ,  $c=21.2$ , calibrated PAR=8.7 dB); Calibrated: 23.08.2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**MSL-5GHz/Left Side Position - Channel 52/Area Scan (121x221x1):** Interpolatedgrid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.416 W/kg


**MSL-5GHz/Left Side Position - Channel 52/Zoom Scan (7x11x12)/Cube 0:**Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 6.726 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.662 mW/g

**SAR(1 g) = 0.179 mW/g; SAR(10 g) = 0.047 mW/g**

Maximum value of SAR (measured) = 0.388 W/kg

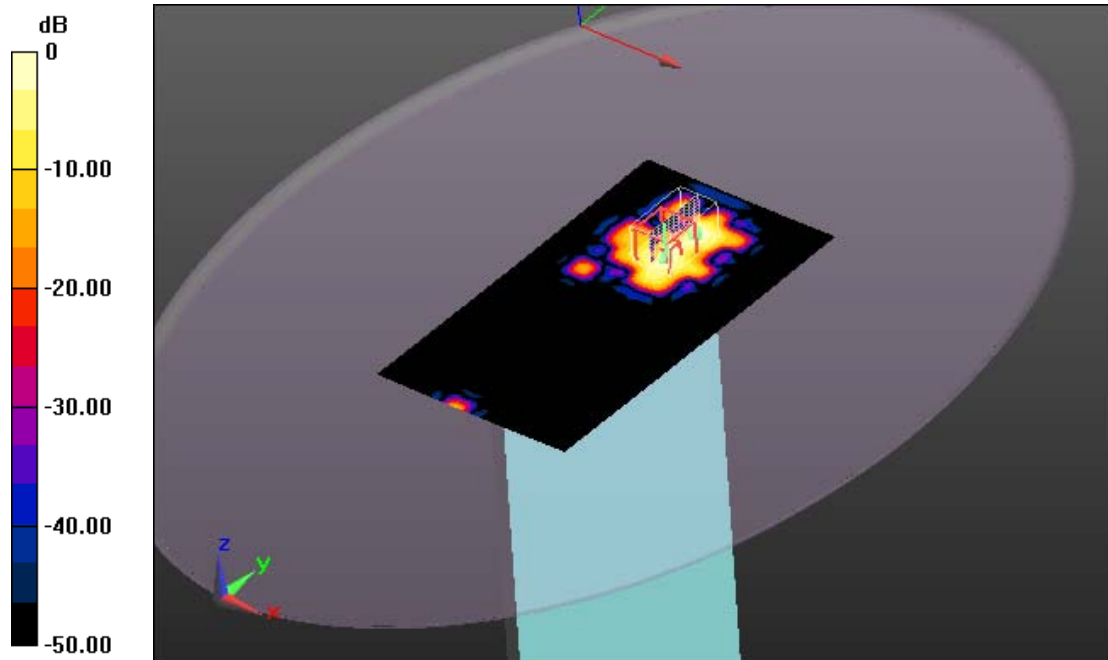

0 dB = 0.388 W/kg = -8.22 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 23.5°C; liquid temperature: 21.7°C

Date/Time: 05.01.2013 09:11:52

**OET65\_EN62209-2-Body-WLAN 5GHz****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Communication System Band: 5 GHz Band (5030.0 - 5825.0 MHz); Frequency: 5560 MHz; Communication System PAR: 8.69 dB; PMF: 1.07895

Medium parameters used:  $f = 5560$  MHz;  $\sigma = 5.78$  mho/m;  $\epsilon_r = 47.17$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.1, 3.1, 3.1); Calibrated: 23.08.2012;
- Modulation Compensation: PMR (X:  $a=10.1$ ,  $b=68.5$ ,  $c=21.4$ , calibrated PAR=8.7 dB / Y:  $a=9.85$ ,  $b=67.7$ ,  $c=21.0$ , calibrated PAR=8.7 dB / Z:  $a=9.78$ ,  $b=67.8$ ,  $c=21.2$ , calibrated PAR=8.7 dB); Calibrated: 23.08.2012
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**MSL-5GHz/Left Side Position - Channel 112/Area Scan (91x201x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.331 W/kg

**MSL-5GHz/Left Side Position - Channel 112/Zoom Scan (9x9x12)/Cube 0:**


Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 5.503 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.756 mW/g

**SAR(1 g) = 0.204 mW/g; SAR(10 g) = 0.054 mW/g**

Maximum value of SAR (measured) = 0.425 W/kg

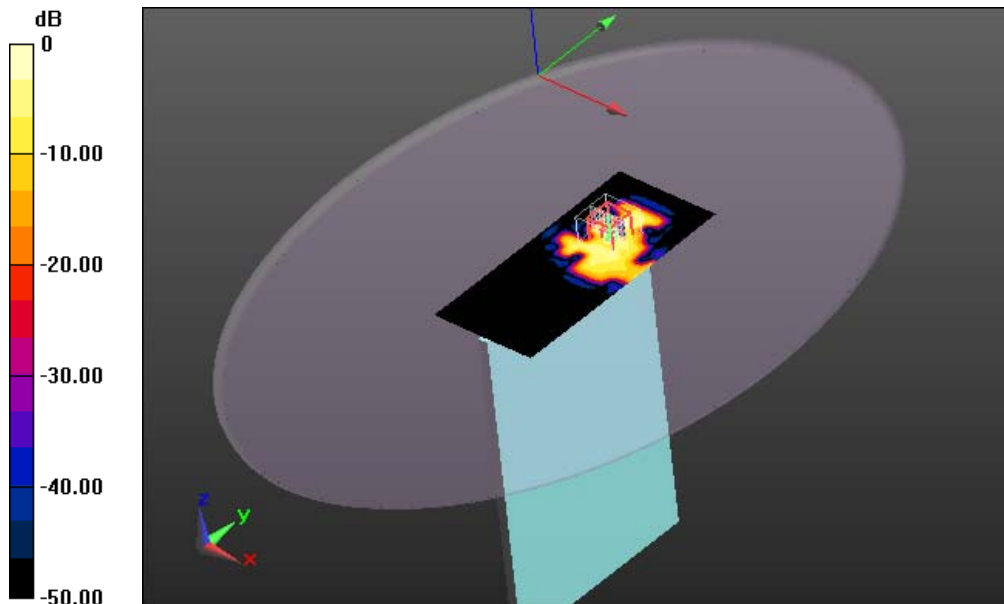

0 dB = 0.425 W/kg = -7.43 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 23.5°C; liquid temperature: 21.7°C

Date/Time: 05.01.2013 09:29:55

**OET65\_EN62209-2-Body-WLAN 5GHz****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Communication System Band: 5 GHz Band (5030.0 - 5825.0 MHz); Frequency: 5745 MHz; Communication System PAR: 8.69 dB; PMF: 1.07895

Medium parameters used:  $f = 5745$  MHz;  $\sigma = 6.01$  mho/m;  $\epsilon_r = 46.75$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.12, 3.12, 3.12); Calibrated: 23.08.2012;
- Modulation Compensation: PMR (X: a=10.1, b=68.5, c=21.4, calibrated PAR=8.7 dB / Y: a=9.85, b=67.7, c=21.0, calibrated PAR=8.7 dB / Z: a=9.78, b=67.8, c=21.2, calibrated PAR=8.7 dB); Calibrated: 23.08.2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection), z = 1.0, 23.0
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**MSL-5GHz/Left Side Position - Channel 149/Area Scan (91x201x1):** Interpolated

grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.299 W/kg

**MSL-5GHz/Left Side Position - Channel 149/Zoom Scan (9x13x12)/Cube 0:**


Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.142 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.642 mW/g

**SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.032 mW/g**

Maximum value of SAR (measured) = 0.273 W/kg

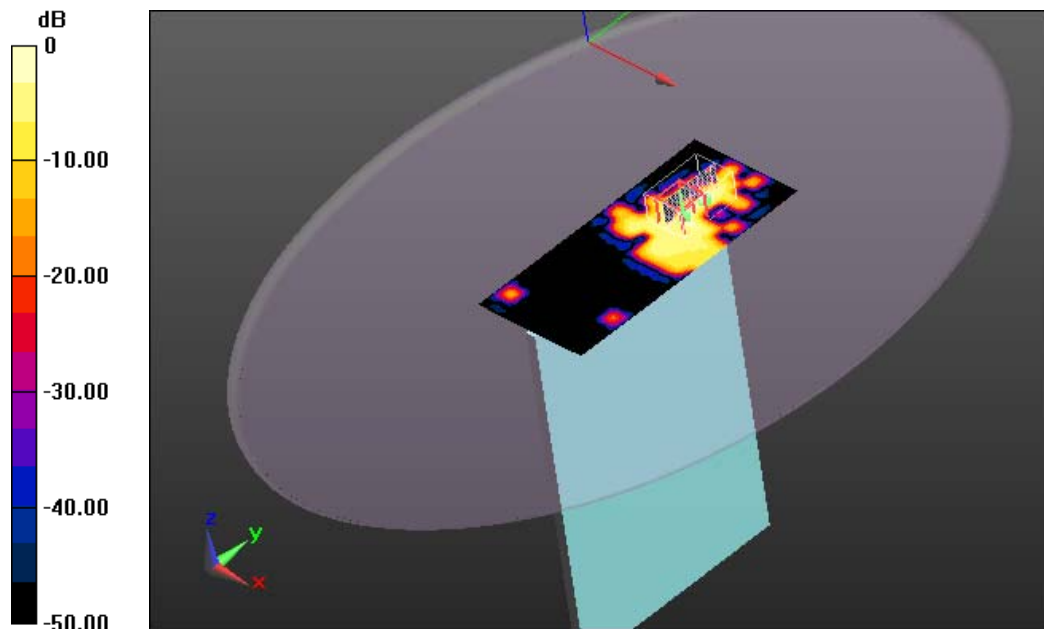

0 dB = 0.273 W/kg = -11.28 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 23.5°C; liquid temperature: 21.7°C

Date/Time: 05.01.2013 19:03:41

**OET65\_EN62209-2-Body-WLAN 5GHz****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Communication System Band: 5 GHz Band (5030.0 - 5825.0 MHz); Frequency: 5745 MHz; Communication System PAR: 8.69 dB; PMF: 1.07895

Medium parameters used:  $f = 5745$  MHz;  $\sigma = 6.01$  mho/m;  $\epsilon_r = 46.75$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.12, 3.12, 3.12); Calibrated: 23.08.2012;
- Modulation Compensation: PMR (X:  $a=10.1$ ,  $b=68.5$ ,  $c=21.4$ , calibrated PAR=8.7 dB / Y:  $a=9.85$ ,  $b=67.7$ ,  $c=21.0$ , calibrated PAR=8.7 dB / Z:  $a=9.78$ ,  $b=67.8$ ,  $c=21.2$ , calibrated PAR=8.7 dB); Calibrated: 23.08.2012
- Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0, 23.0$
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**MSL-5GHz/Rear position - Channel 149 wc/Area Scan (201x181x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.99 W/kg

**MSL-5GHz/Rear position - Channel 149 wc/Zoom Scan (8x8x12)/Cube 0:**


Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 17.681 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 4.125 mW/g

**SAR(1 g) = 0.782 mW/g; SAR(10 g) = 0.188 mW/g**

Maximum value of SAR (measured) = 1.87 W/kg

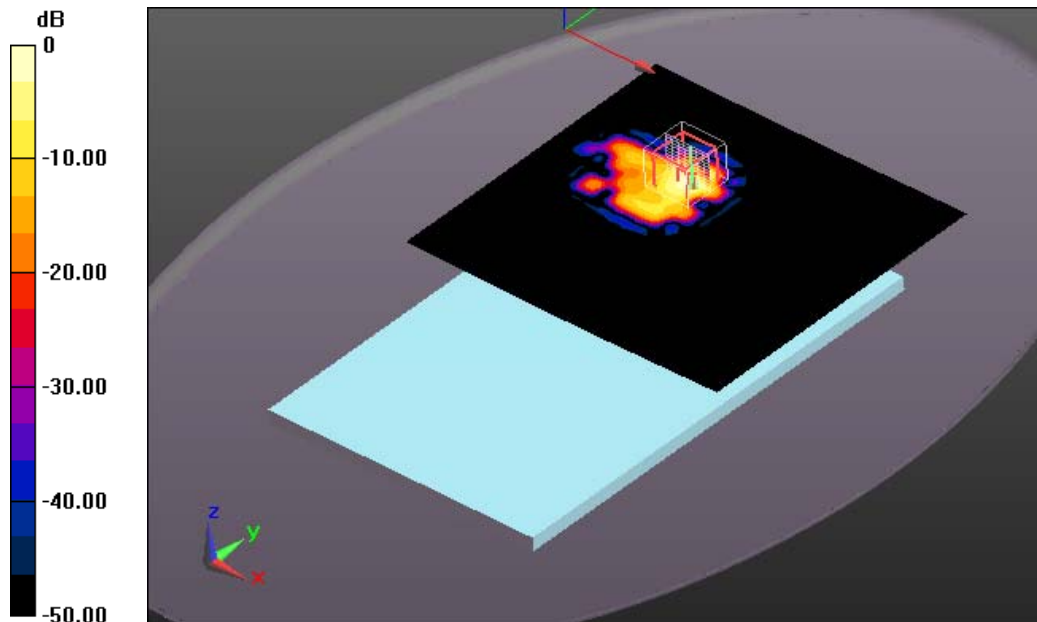

0 dB = 1.87 W/kg = 5.44 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 23.5°C; liquid temperature: 21.7°C

Date/Time: 08.01.2013 11:23:27

**OET65\_EN62209-2-Body-WLAN 5GHz****DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH**

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Communication System Band: 5 GHz Band (5030.0 - 5825.0 MHz); Frequency: 5745 MHz; Communication System PAR: 8.69 dB; PMF: 1.07895

Medium parameters used:  $f = 5745$  MHz;  $\sigma = 6.01$  mho/m;  $\epsilon_r = 46.75$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: EX3DV4 - SN3566; ConvF(3.12, 3.12, 3.12); Calibrated: 23.08.2012;
- Modulation Compensation: PMR (X:  $a=10.1$ ,  $b=68.5$ ,  $c=21.4$ , calibrated PAR=8.7 dB / Y:  $a=9.85$ ,  $b=67.7$ ,  $c=21.0$ , calibrated PAR=8.7 dB / Z:  $a=9.78$ ,  $b=67.8$ ,  $c=21.2$ , calibrated PAR=8.7 dB); Calibrated: 23.08.2012
- Sensor-Surface: 2mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2mm (Mechanical Surface Detection),  $z = 1.0$ , 23.0
- Electronics: DAE3 Sn477; Calibrated: 09.05.2012
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1046
- DASY52 52.8.2(969); SEMCAD X 14.6.6(6824)

**MSL-5GHz/Rear position - Channel 149 with extended TV antenna/Area****Scan (201x181x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 1.52 W/kg


**MSL-5GHz/Rear position - Channel 149 with extended TV antenna/Zoom****Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4$ mm,  $dy=4$ mm,  $dz=2$ mm

Reference Value = 15.172 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.663 mW/g

**SAR(1 g) = 0.604 mW/g; SAR(10 g) = 0.149 mW/g**

Maximum value of SAR (measured) = 1.43 W/kg

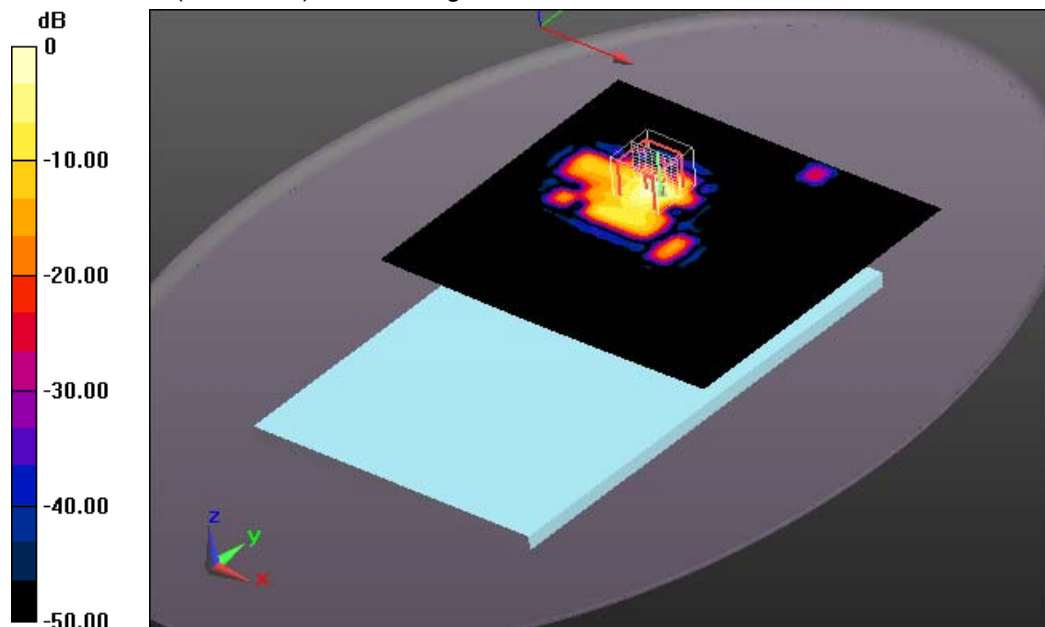

0 dB = 1.43 W/kg = 3.11 dB W/kg

**Additional information:**

position or distance of DUT to SAM: 0 mm

ambient temperature: 23.5°C; liquid temperature: 21.7°C

**Annex B.6: Separation distance between the peak SAR locations R<sub>i</sub>**

Date/Time: 19.12.2012 11:58:23

**GSM850 + WLAN 2.4GHz**

DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH

**Body MSL/Rear Position - Middle/Zoom Scan (7x7x7)/Cube 0: Peak SAR**

(extrapolated) = 3.714 mW/g

**SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.462 mW/g**

Maximum value of SAR (measured) = 1.33 W/kg

Date/Time: 18.12.2012 09:08:41


DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW

**Body MSL/Rear Position - Low 8PSK WC 2/Zoom Scan (7x7x7)/Cube 0: Peak**


SAR (extrapolated) = 2.788 mW/g

**SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.695 mW/g**

Maximum value of SAR (measured) = 1.43 W/kg

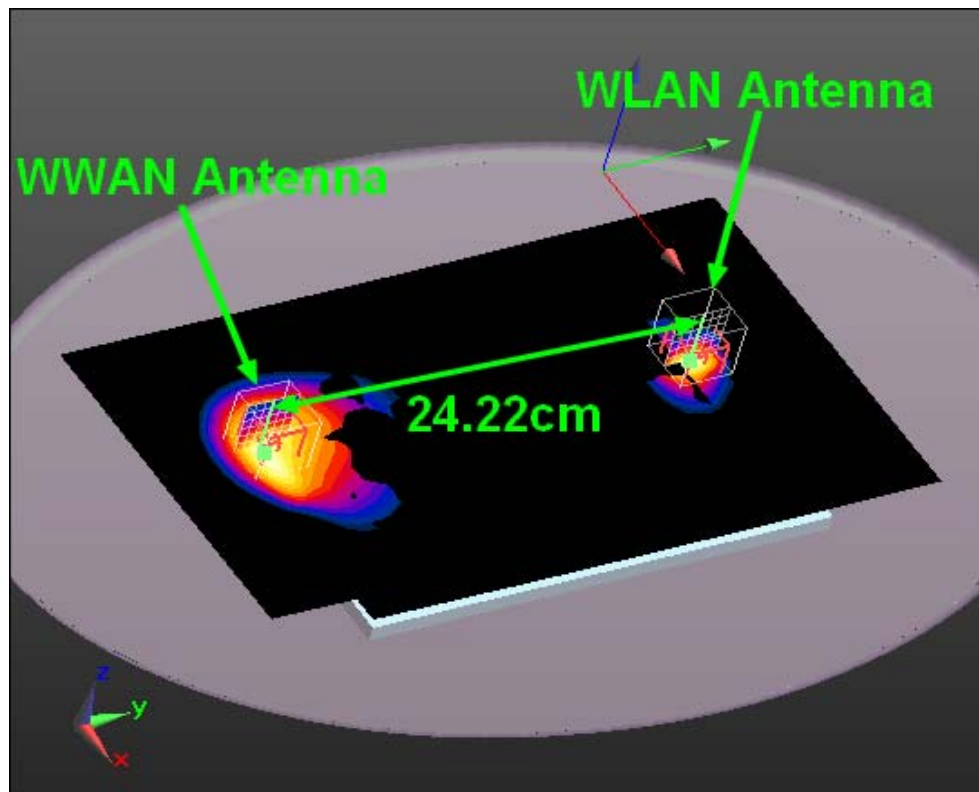

0 dB = 1.44 W/kg = 3.17 dB W/kg

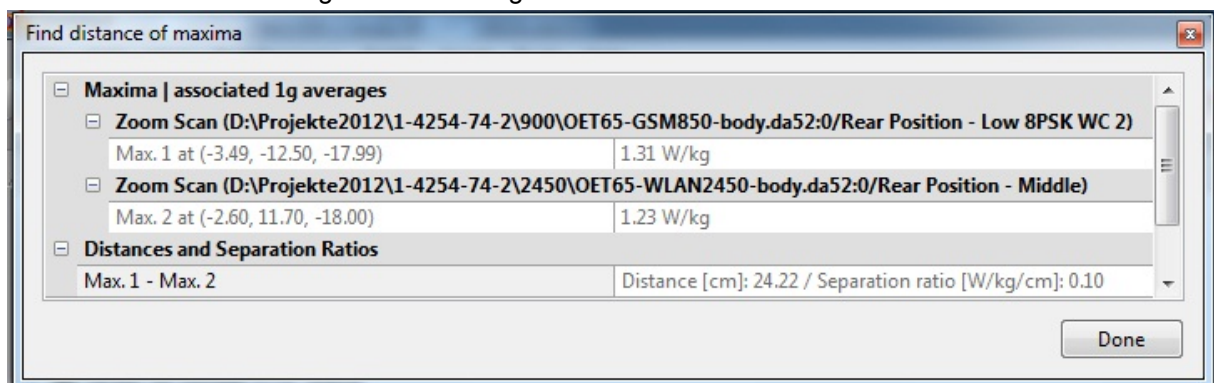

Date/Time: 18.12.2012 10:57:39

**GSM1900 + WLAN 2.4GHz**

DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW

**Body MSL/Rear Position - Middle 8PSK/Zoom Scan (7x7x7)/Cube 0:** Peak SAR  
(extrapolated) = 2.170 mW/g**SAR(1 g) = 0.911 mW/g; SAR(10 g) = 0.441 mW/g**


Maximum value of SAR (measured) = 1.04 W/kg

Date/Time: 19.12.2012 11:58:23


DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH

**Body MSL/Rear Position - Middle/Zoom Scan (7x7x7)/Cube 0:** Peak SAR  
(extrapolated) = 3.714 mW/g**SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.462 mW/g**

Maximum value of SAR (measured) = 1.33 W/kg

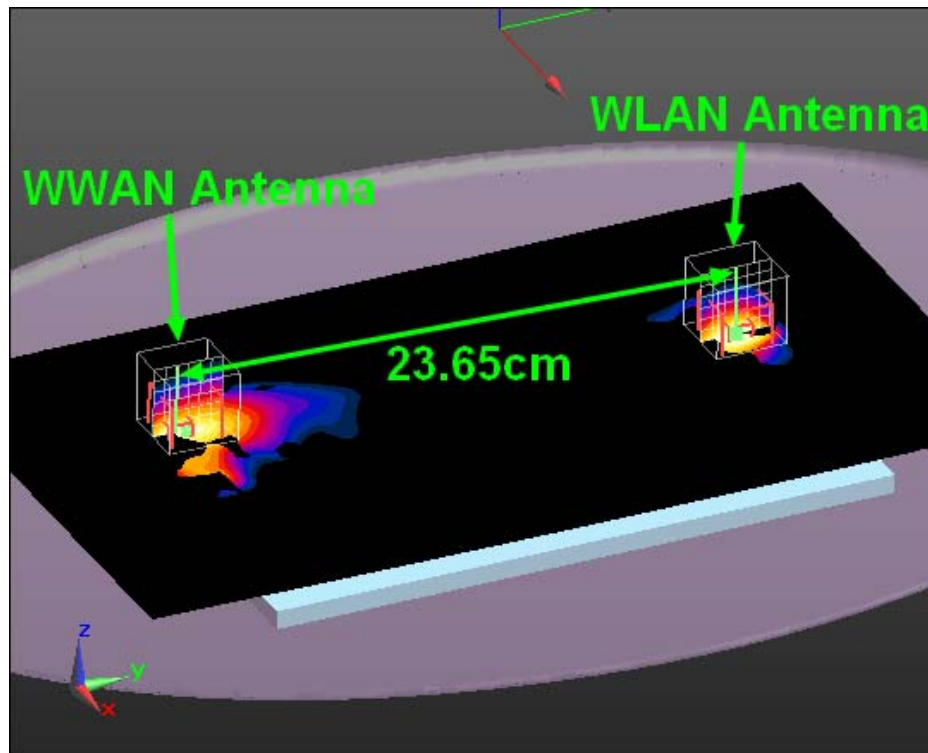

0 dB = 1.04 W/kg = 0.34 dB W/kg

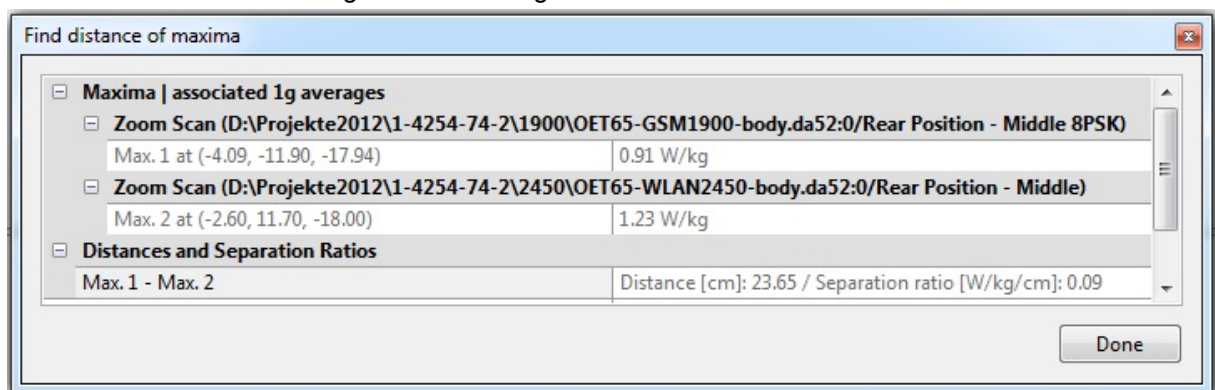

Date/Time: 19.12.2012 11:58:23

**UMTS FDDV + WLAN 2.4GHz**

DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH

**Body MSL/Rear Position - Middle/Zoom Scan (7x7x7)/Cube 0:**

Peak SAR (extrapolated) = 3.714 mW/g

**SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.462 mW/g**

Maximum value of SAR (measured) = 1.33 W/kg

Date/Time: 15.12.2012 12:43:43


DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW

**Body MSL/Rear Position - Middle wc/Zoom Scan (7x7x7)/Cube 0:**


Peak SAR (extrapolated) = 2.387 mW/g

**SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.655 mW/g**

Maximum value of SAR (measured) = 1.31 W/kg

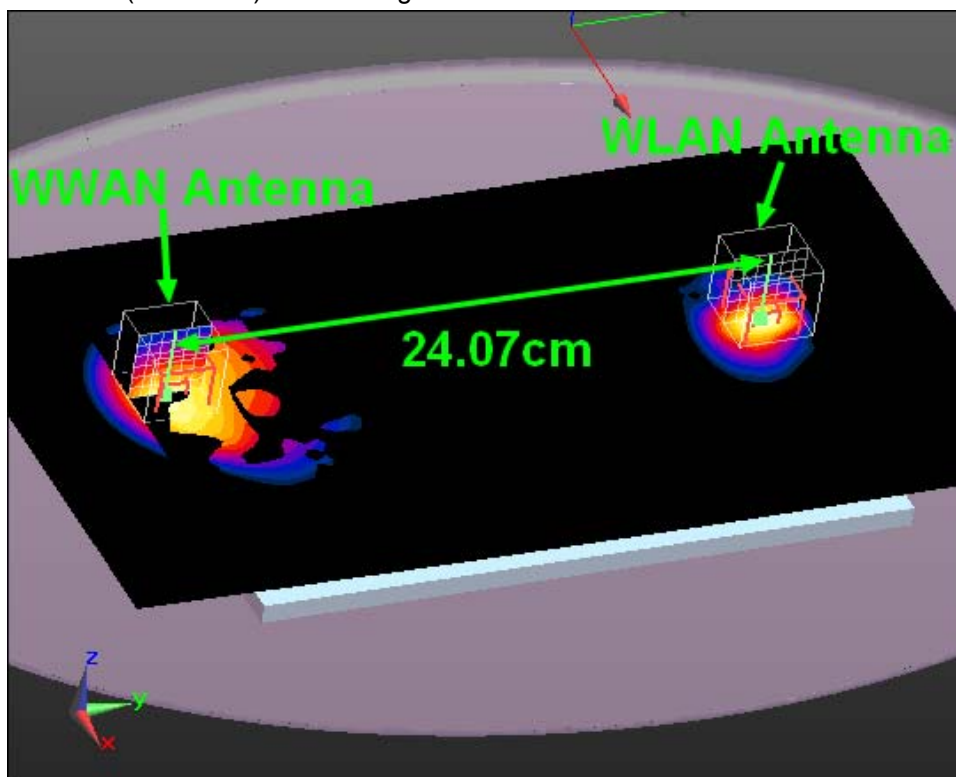

0 dB = 1.31 W/kg = 2.35 dB W/kg

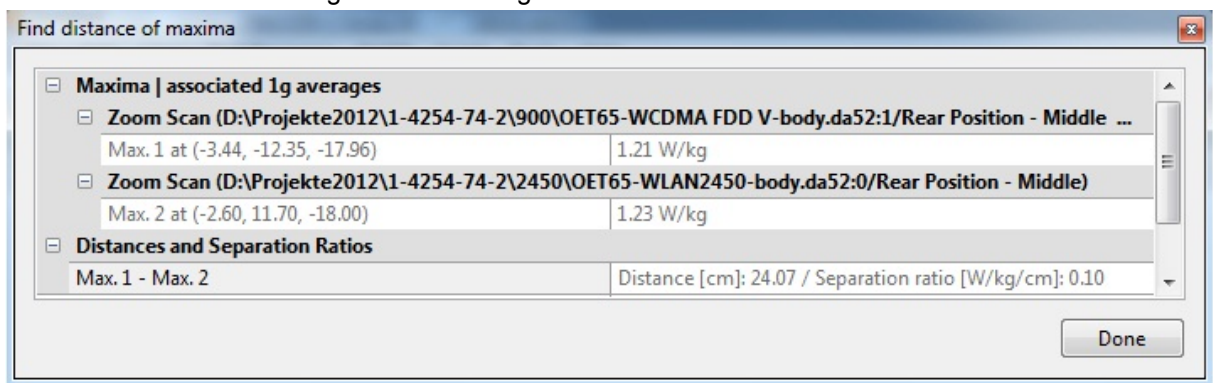

Date/Time: 05.01.2013 15:58:53

**GSM850 + WLAN 5GHz**

DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH

**MSL-5GHz/Rear position - Channel 149/Zoom Scan (8x8x12)/Cube 0: Peak**

SAR (extrapolated) = 4.842 mW/g

**SAR(1 g) = 0.894 mW/g; SAR(10 g) = 0.205 mW/g**

Maximum value of SAR (measured) = 2.24 W/kg

Date/Time: 18.12.2012 08:36:22


DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW

**Body MSL/Rear Position - Low 8PSK WC 2/Zoom Scan (7x7x7)/Cube 0: Peak**


SAR (extrapolated) = 2.788 mW/g

**SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.695 mW/g**

Maximum value of SAR (measured) = 1.43 W/kg

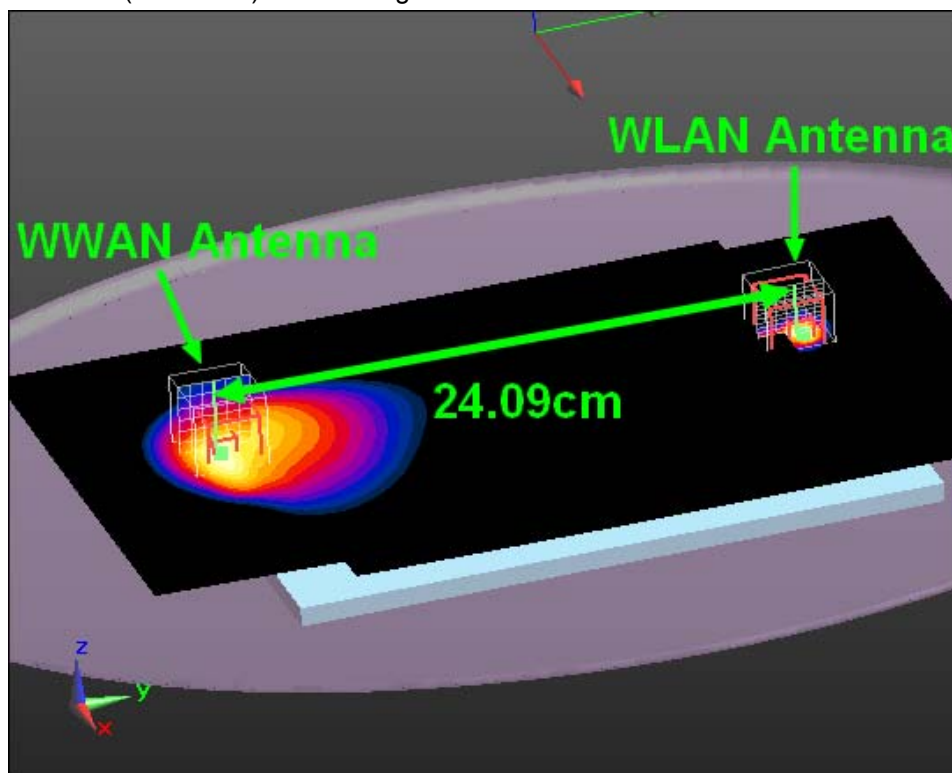

0 dB = 1.43 W/kg = 3.11 dB W/kg

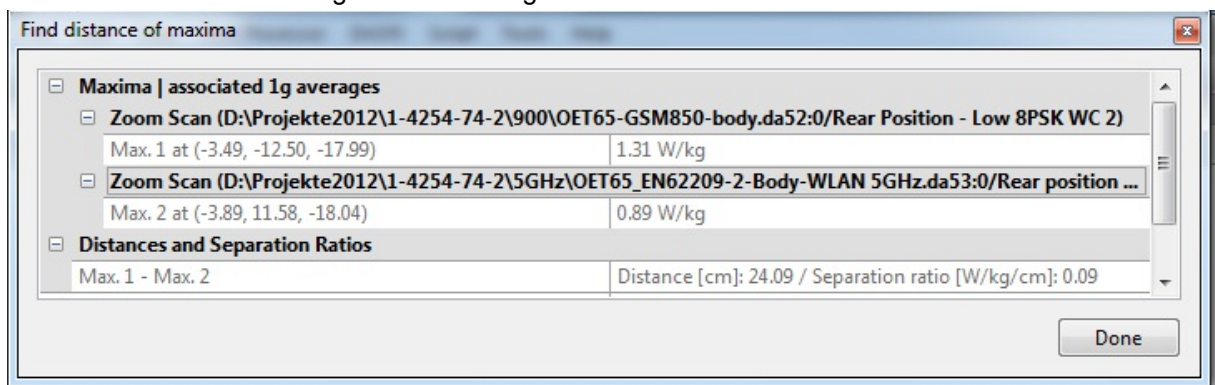

Date/Time: 18.12.2012 10:57:39

**GSM1900 + WLAN 5GHz**

DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW

**Body MSL/Rear Position - Middle 8PSK/Zoom Scan (7x7x7)/Cube 0:** Peak SAR (extrapolated) = 2.170 mW/g**SAR(1 g) = 0.911 mW/g; SAR(10 g) = 0.441 mW/g**

Maximum value of SAR (measured) = 1.04 W/kg

Date/Time: 05.01.2013 15:58:53


DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH

**MSL-5GHz/Rear position - Channel 149/Zoom Scan (8x8x12)/Cube 0:** Peak


SAR (extrapolated) = 4.842 mW/g

**SAR(1 g) = 0.894 mW/g; SAR(10 g) = 0.205 mW/g**

Maximum value of SAR (measured) = 2.24 W/kg

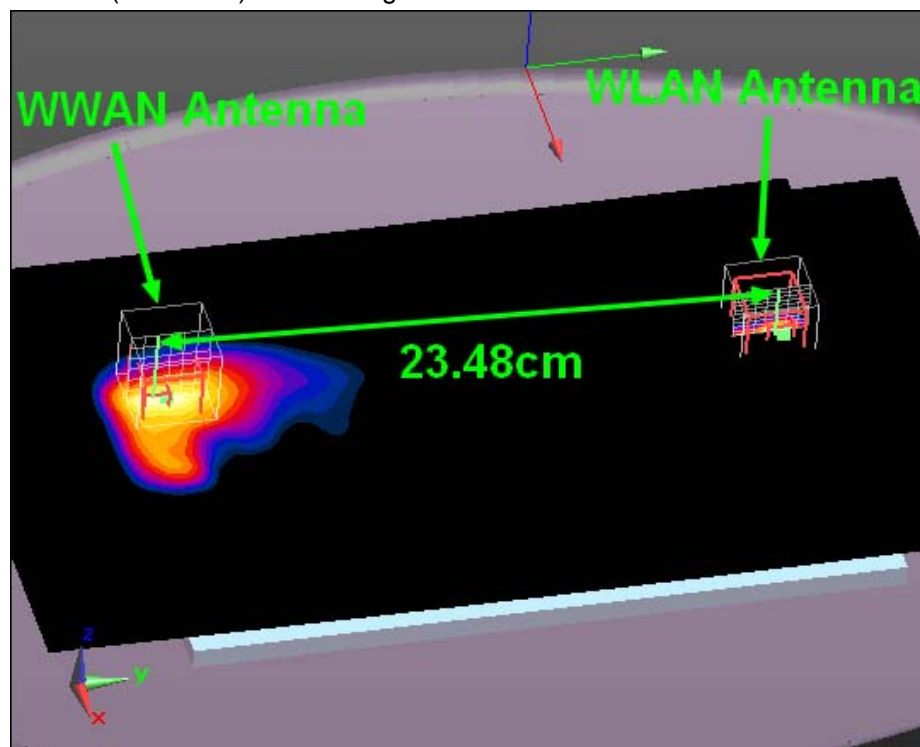

0 dB = 1.04 W/kg = 0.34 dB W/kg

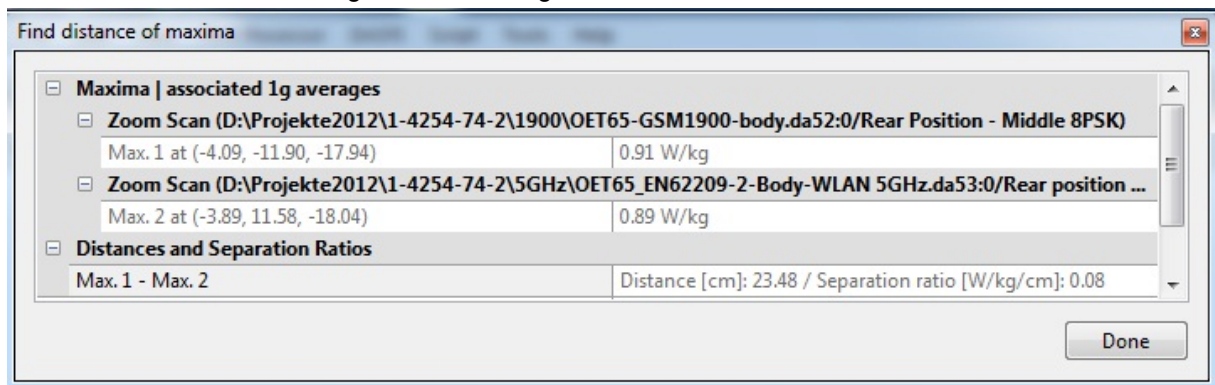

Date/Time: 05.01.2013 15:58:53

**UMTS FDDV + WLAN 5GHz**

DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BH

**MSL-5GHz/Rear position - Channel 149/Zoom Scan (8x8x12)/Cube 0: Peak**

SAR (extrapolated) = 4.842 mW/g

**SAR(1 g) = 0.894 mW/g; SAR(10 g) = 0.205 mW/g**

Maximum value of SAR (measured) = 2.24 W/kg

Date/Time: 15.12.2012 12:43:43


DUT: Sony; Type: TM-0000-BV; Serial: CB5A1MD9BW

**Body MSL/Rear Position - Middle wc/Zoom Scan (7x7x7)/Cube 0: Peak SAR**


(extrapolated) = 2.387 mW/g

**SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.655 mW/g**


Maximum value of SAR (measured) = 1.31 W/kg

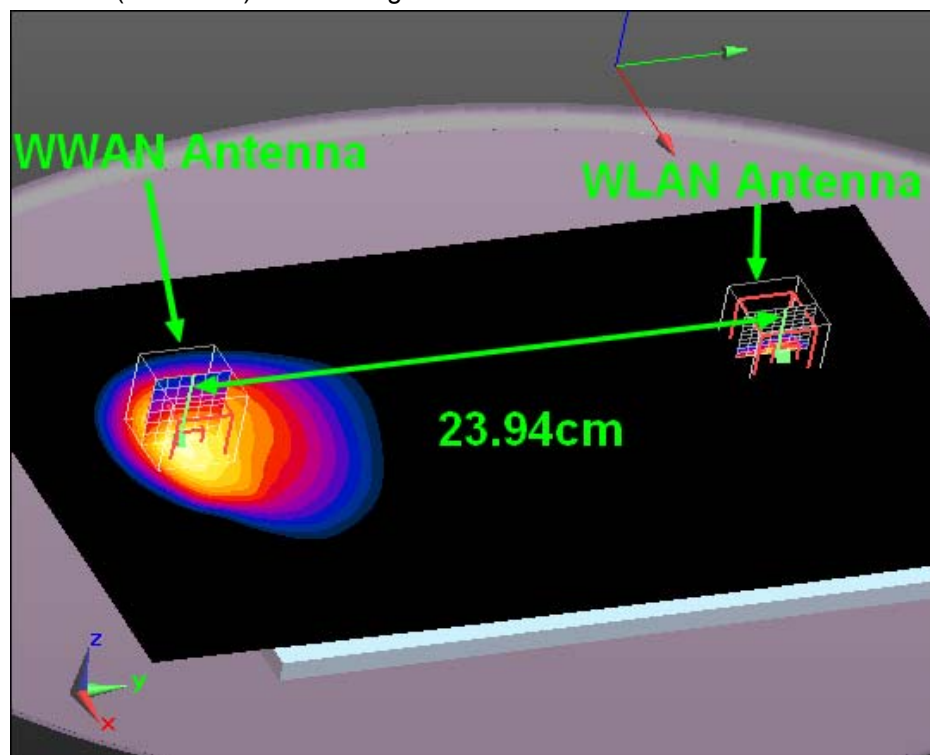


0 dB = 1.31 W/kg = 2.35 dB W/kg

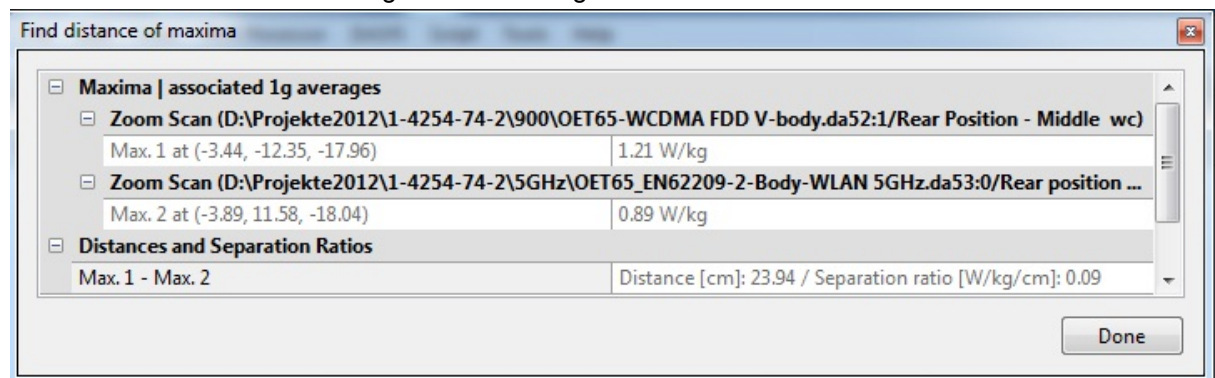


## Annex B.7: Z-axis scan

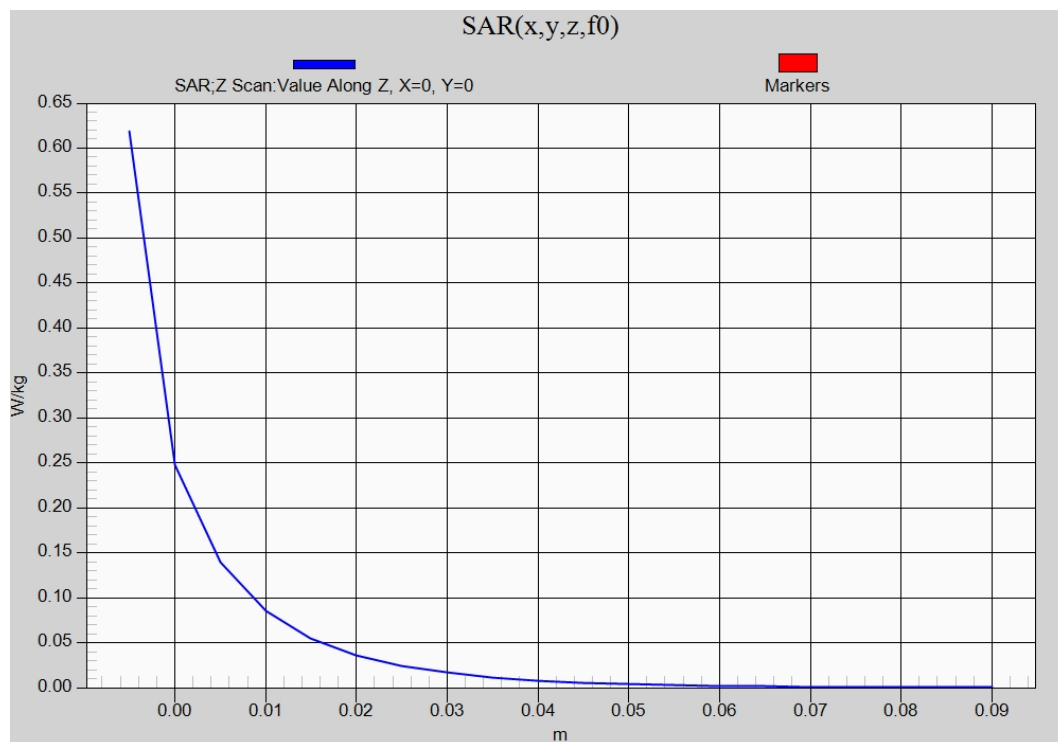


850 body

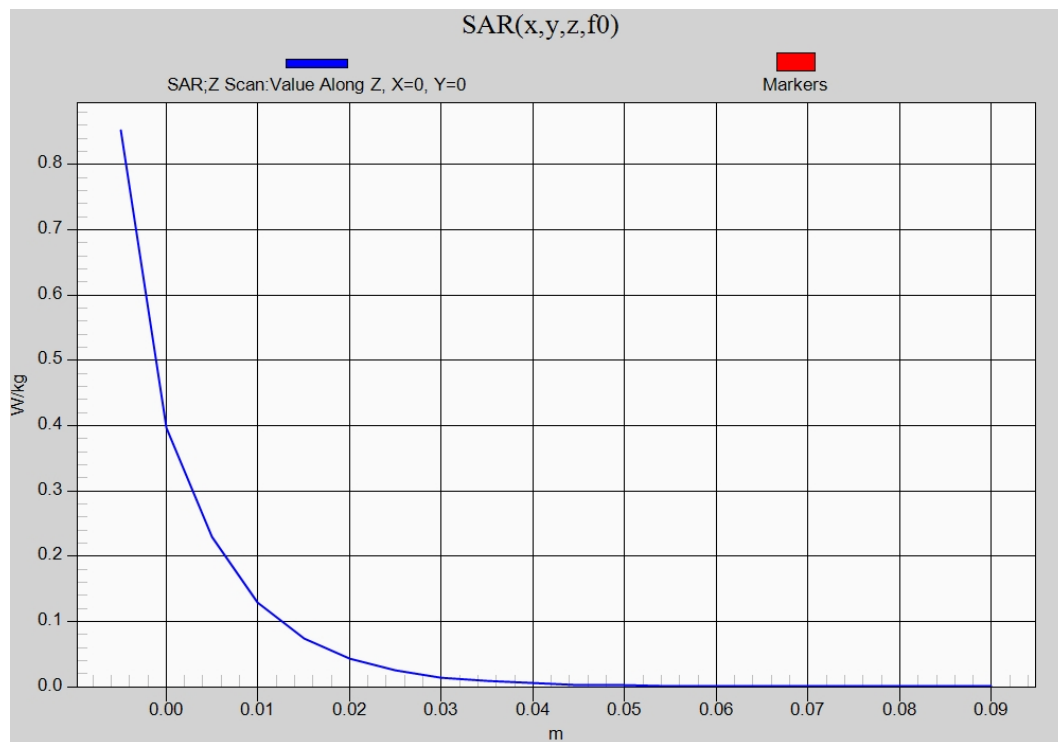

1900 body

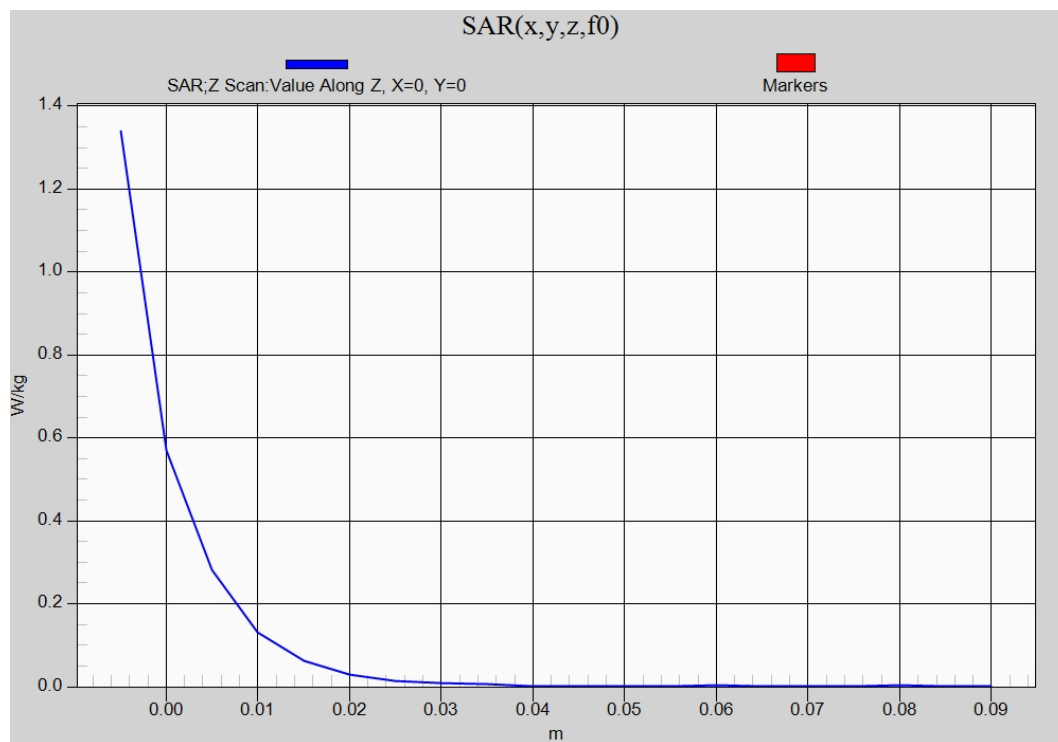

2450 body

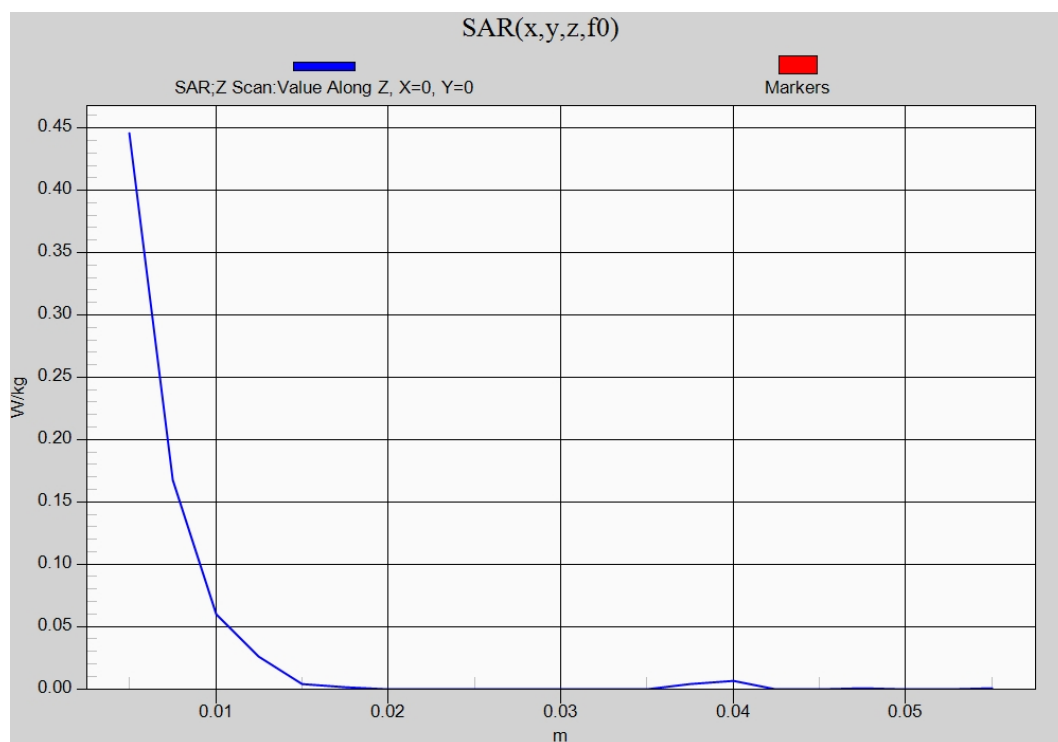

5GHz body

## Annex B.8: Liquid depth

Photo 1: Liquid depth 850 MHz body simulating liquid

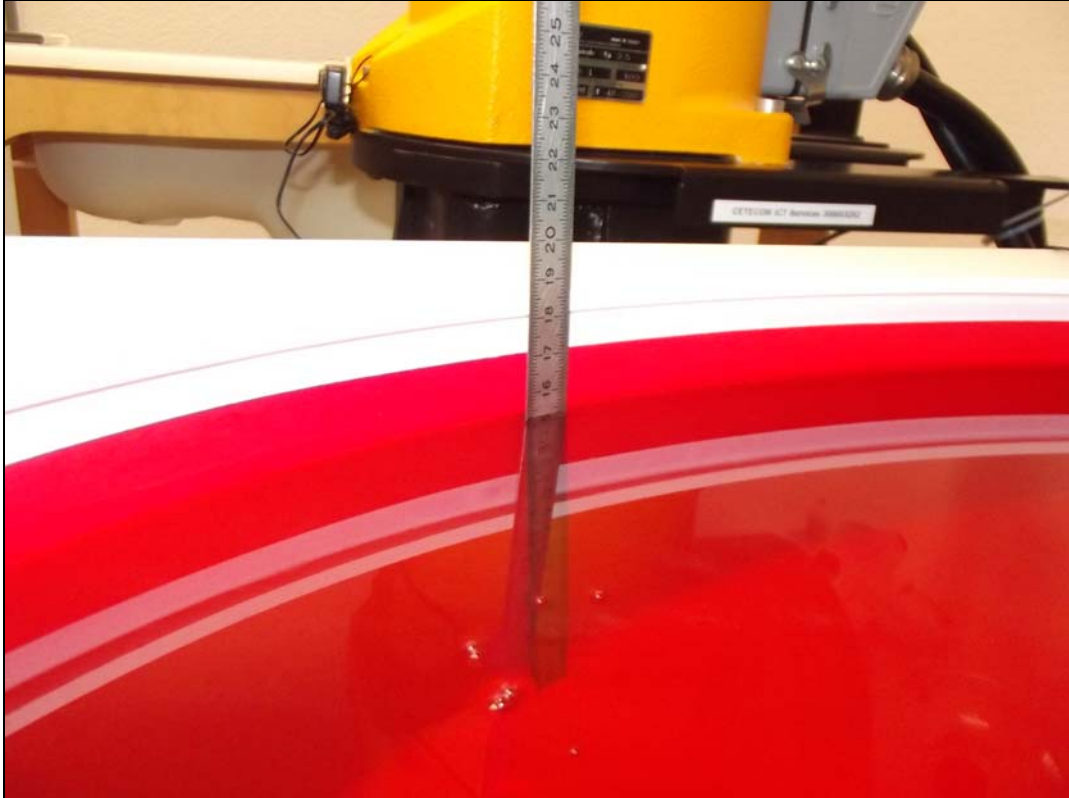


Photo 2: Liquid depth 1900 MHz body simulating liquid

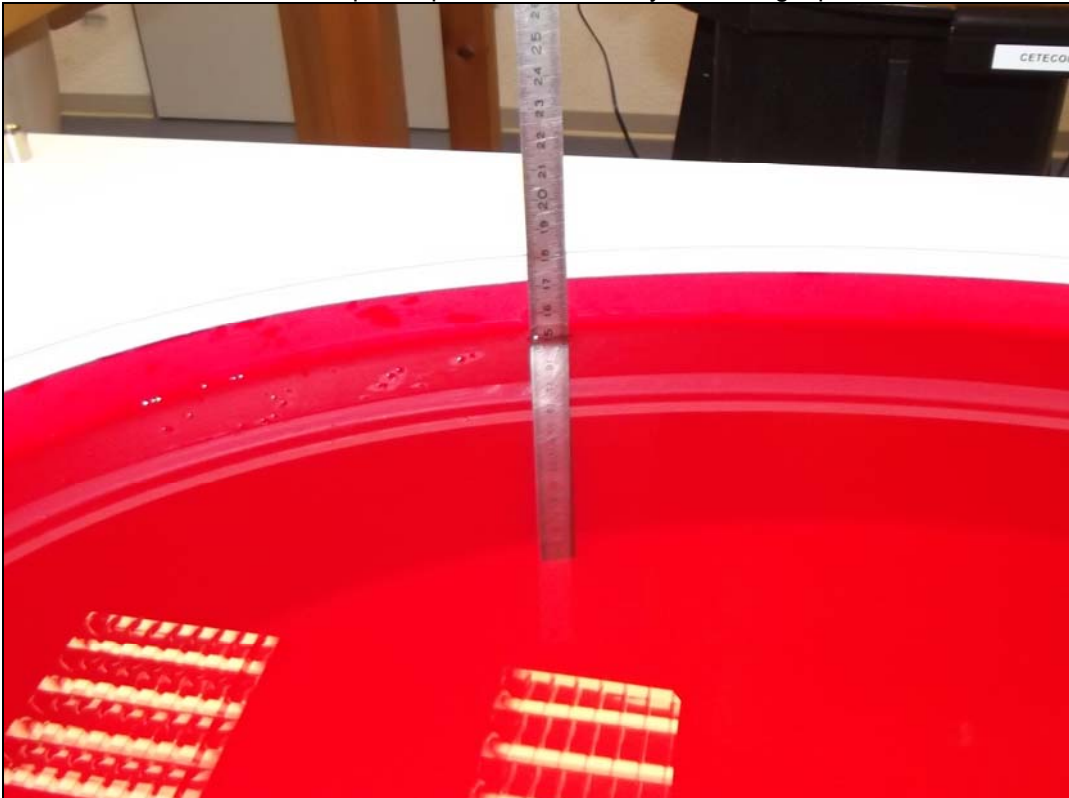


Photo 3: Liquid depth 2450 MHz body simulating liquid


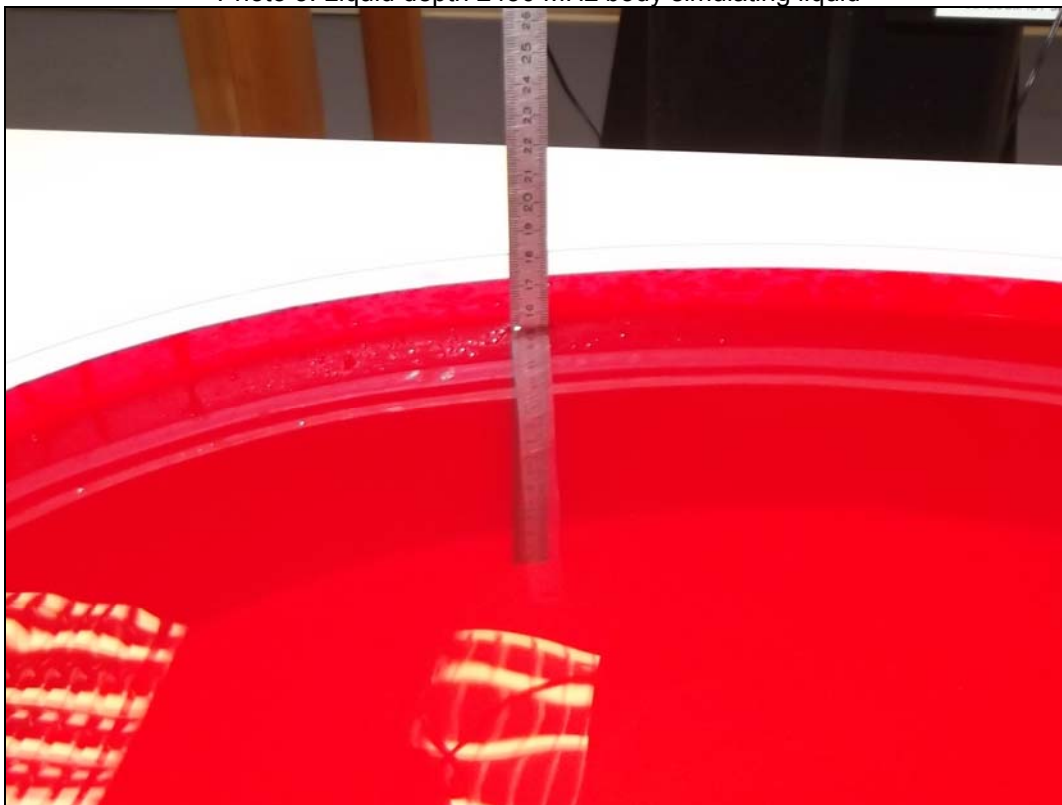


Photo 4: Liquid depth 5 GHz body simulating liquid

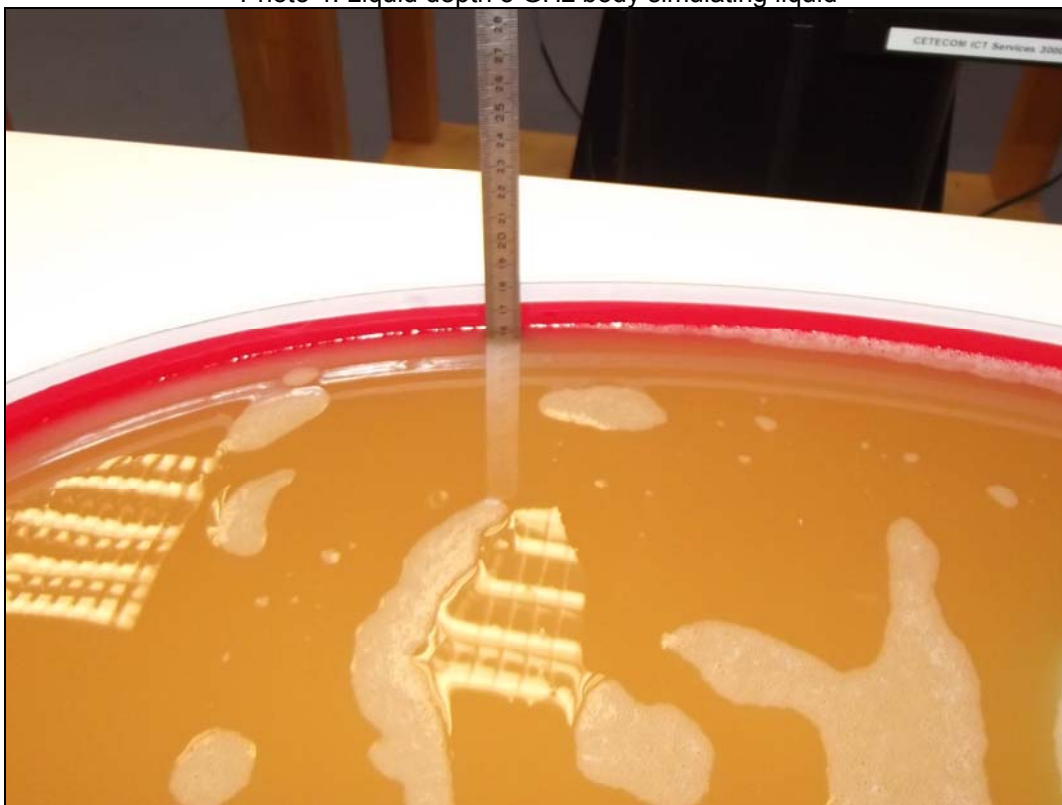

## **Annex C: Photo documentation**

Photo documentation is described in the additional document:

**Appendix to test report no. 1-4254/12-74-02-A Photo documentation**

**Annex D: RF Technical Brief Cover Sheet acc. to RSS-102 Annex A**

1. COMPANY NUMBER: 4170B
2. MODEL NUMBER: TM-0000-BV
3. MANUFACTURER: **Sony Mobile Communications AB**
4. TYPE OF EVALUATION:

SAR Evaluation: Body-worn Device

- Multiple transmitters: Yes ☒ No ☐
- Evaluated against exposure limits: General Public Use ☒ Controlled Use ☐
- Duty cycle used in evaluation: **37.5 %**
- Standard used for evaluation: RSS-102 Issue 4 (2010-03)
- SAR value: **1.436 W/kg.** Measured ☒ Computed ☐ Calculated ☐

**Annex D.1: Declaration of RF Exposure Compliance**

ATTESTATION: I attest that the information provided in Annex D: is correct; that a Technical Brief was prepared and the information it contains is correct; that the device evaluation was performed or supervised by me; that applicable measurement methods and evaluation methodologies have been followed and that the device meets the SAR and/or RF exposure limits of RSS-102.

Signature:



Date: 2013-02-15

NAME : **Thomas Vogler**

TITLE : Dipl.-Ing. (FH)

COMPANY : CETECOM ICT Services GmbH

## Annex E: Calibration parameters

Calibration parameters are described in the additional document:

### Appendix to test report no. 1-4254/12-74-02-A Calibration data, Phantom certificate and detail information of the DASY System

## Annex F: Document History

| Version | Applied Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Date of Release |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
|         | Initial Release                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 2013-01-18      |
| -A      | <ul style="list-style-type: none"> <li>- KDB references updated</li> <li>- headset information and picture added</li> <li>- footnotes about GPRS/EGRPS SAR test configuration updated</li> <li>- test distance explanation added for adjacent edge SAR test exclusion</li> <li>- adjacent edge SAR test exclusion table added</li> <li>- reference to KDB inquiry added</li> <li>- more detailed description of G-sensor function check</li> <li>- SAR variability check overview added</li> </ul> | 2013-02-15      |

## Annex G: Further Information

### Glossary

|                    |   |                                       |
|--------------------|---|---------------------------------------|
| BW                 | - | Bandwidth                             |
| DUT                | - | Device under Test                     |
| EUT                | - | Equipment under Test                  |
| FCC                | - | Federal Communication Commission      |
| FCC ID             | - | Company Identifier at FCC             |
| HW                 | - | Hardware                              |
| IC                 | - | Industry Canada                       |
| Inv. No.           | - | Inventory number                      |
| LTE                | - | Long Term Evolution                   |
| N/A                | - | not applicable                        |
| OET                | - | Office of Engineering and Technology  |
| RB                 | - | resource block(s)                     |
| SAR                | - | Specific Absorption Rate              |
| S/N                | - | Serial Number                         |
| SPLSR <sub>i</sub> | - | SAR-to-(peak-locations spacing) ratio |
| SW                 | - | Software                              |