

HAC T-Coil Signal Test Report

Test report no.:	T-Coil_RM-1065_02	Date of report:	2015-01-30
Template version:	9.2	Number of pages:	16
Testing laboratory:	TCC Microsoft Salo Laboratory P.O.Box 303 Joensuunkatu 7E FIN-24101 SALO, FINLAND Tel. +358 71 800 8000 Fax. +358 71 80 44122		Microsoft P.O.Box 303 Joensuunkatu 7 FIN-24101 SALO, FINLAND Tel. +358 71 800 8000 Fax. +358 71 80 44122
Responsible test engineer:	Juha-Matti Varjonen	Product contact person:	Jari Rontu
Measurements made by:	Juha-Matti Varjonen		
Tested devices:	RM-1065, RM-1064 (Hearing aid mode active)		
FCC ID:	PYAAAA	IC:	661X-AAA
Supplement reports:	RF_RM-1065_01, HAC_Photo_RM-1065_03		
Testing has been carried out in accordance with:	ANSI C63.19-2011 American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids CTIA Test Plan for Hearing Aid Compatibility, Revision 3.0, November 2013		
Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft.		
Test results:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		

Date and signatures:

For the contents:

CONTENTS

1. SUMMARY OF HAC T-COIL SIGNAL TEST REPORT	3
1.1 TEST DETAILS.....	3
1.2 SUMMARY OF T-COIL TEST RESULTS	3
1.2.1 T-Coil Coupling Field Intensity	3
1.2.2 Frequency Response at Axial Measurement Point	4
1.2.3 Signal Quality	4
1.2.4 Overall HAC rating of the tested device	4
2. DESCRIPTION OF THE DEVICE UNDER TEST (DUT).....	5
2.1 PICTURE OF THE DEVICE.....	6
3. TEST CONDITIONS.....	7
3.1 TEMPERATURE AND HUMIDITY.....	7
3.2 DEVICE CONTROL AND PARAMETERS.....	7
4. DESCRIPTION OF THE TEST EQUIPMENT	8
4.1 MEASUREMENT SYSTEM AND COMPONENTS	8
4.1.1 Audio Magnetic Probe AM1DV3	9
4.1.2 Audio Magnetic Measurement Instrument AMMI	9
4.1.3 Audio Magnetic Calibration Coil AMCC	9
4.1.4 Device Holder	9
4.2 VERIFICATION OF THE SYSTEM	9
5. DESCRIPTION OF THE TEST PROCEDURE	10
5.1 TEST ARCH AND DEVICE HOLDER.....	10
5.2 TEST POSITIONS.....	10
5.3 T-COIL SCAN PROCEDURES AND USED TEST SIGNALS.....	10
5.4 T-COIL REQUIREMENTS AND CATEGORY LIMITS	11
6. MEASUREMENT UNCERTAINTY.....	12
7. RESULTS	13

APPENDIX A: MEASUREMENT SCANS

APPENDIX B: AUDIO MAGNETIC PROBE AM1DV3 CALIBRATION DOCUMENT

1. SUMMARY OF HAC T-COIL SIGNAL TEST REPORT

1.1 Test Details

Period of test	2015-01-15 to 2015-01-16
HW and SW numbers of tested device	RM-1065, HW: 5201, SW: 02154.00000.14501.24000
Batteries used in testing	BV-T4B
Other accessories used in testing	-
State of sample	Prototype unit
Notes	-

1.2 Summary of T-Coil Test Results

1.2.1 T-Coil Coupling Field Intensity

1.2.1.1 Axial Field Intensity (z)

Mode	Minimum limit [dB (A/m)]	Result [dB (A/m)]	Verdict
GSM850	-18	3.79	Pass
WCDMA850 (Band 5)	-18	1.53	Pass
WCDMA1700 / 2100 (Band 4)	-18	2.40	Pass
GSM1900	-18	3.70	Pass
WCDMA1900 (Band 2)	-18	0.68	Pass

1.2.1.2 Transversal Field Intensity (y)

Mode	Minimum limit [dB (A/m)]	Result [dB (A/m)]	Verdict
GSM850	-18	-4.55	Pass
WCDMA850 (Band 5)	-18	-4.93	Pass
WCDMA1700 / 2100 (Band 4)	-18	-4.95	Pass
GSM1900	-18	-4.50	Pass
WCDMA1900 (Band 2)	-18	-4.97	Pass

1.2.2 Frequency Response at Axial Measurement Point

Mode	Verdict
GSM850	Pass
WCDMA850 (Band 5)	Pass
WCDMA1700 / 2100 (Band 4)	Pass
GSM1900	Pass
WCDMA1900 (Band 2)	Pass

1.2.3 Signal Quality

Mode	Minimum limit [dB]				Minimum result [dB]	Category assessment
	T1	T2	T3	T4		
GSM850	0	10	20	30	39.63	T4
WCDMA850 (Band 5)	0	10	20	30	41.16	T4
WCDMA1700 / 2100 (Band 4)	0	10	20	30	35.48	T4
GSM1900	0	10	20	30	41.30	T4
WCDMA1900 (Band 2)	0	10	20	30	41.14	T4

1.2.4 Overall HAC rating of the tested device

Mode	RF emissions category at T-coil axial measurement point (E-field)*	Category assessment, T-Coil signal quality	Combined HAC category of the tested device
GSM850	M4	T4	M3/T4
WCDMA850 (Band 5)	-	T4	
WCDMA1700 / 2100 (Band 4)	-	T4	
GSM1900	M3	T4	
WCDMA1900 (Band 2)	-	T4	

*See separate HAC RF report

2. DESCRIPTION OF THE DEVICE UNDER TEST (DUT)

Air-interface	Band (MHz)	Type	C63.19/ tested	Simultaneous Transmissions	Reduced power	Voice Over Digital Transport OTT Capability	HAC report number
GSM	850	VO	Yes	Yes BT, WLAN	N/A	NA	T-Coil_RM-1065_02
	1900				N/A	NA	T-Coil_RM-1065_02
	GPRS/EDGE	DT	N/A	Yes BT, WLAN	N/A	YES*	-
WCDMA	850 (Band 5) 1700/2100 (Band 4) 1900 (Band 2)	V/D	Yes	Yes BT, WLAN	N/A	YES	T-Coil_RM-1065_02
FDD- LTE	750 (Band 12) 750 (Band 17) 700 (Band 28a) 700 (Band 28b) 850 (Band 5) 1700/2100 (Band 4) 1900 (Band 2) 2500 (Band 7)	V/D	Yes**	Yes BT, WLAN	N/A	YES	-
BT	2450	DT	N/A	Yes GSM, GPRS/EDGE, WCDMA, LTE	N/A	YES*	-
WLAN	2450	DT	N/A	Yes GSM, GPRS/EDGE, WCDMA, LTE	N/A	YES*	-

VO Voice CMRS/PSTN Service Only

V/D Voice CMRS/PSTN and Data Service

DT Digital Transport

*supports only non CMRS voice (OTT).

**No Associated T-Coil measurement has been made in accordance with 285076 D02 T-Coil testing for CMRS IP.

HAC rating was evaluated for voice mode only in GSM and WCDMA air interfaces in this report.

Outside of USA the transmitter of the device is capable of operating also in 900MHz, 1800MHz, 2100MHz and 2300MHz bands, which are not part of this filing.

Number of SIM cards:	RM-1065: 2 RM-1064: 1 The HAC testing has been carried out only with RM-1065 HW: 5201. The only difference between RM-1065 and RM-1064 is in the number of SIM cards the devices have.
----------------------	--

Two antennas are used for transmission of some of the cellular bands in diversity-Tx mode. In this mode the antennas can not transmit at the same time. See table below for applicable antennas in each transmission band and mode. A separate single antenna is used for WLAN. All antennas are fully and separately HAC tested for individual transmission.

	Tx Antennas	
	Antenna 1	Antenna 2
LTE700 (Band 12)	✓	✓
LTE700 (Band 17)	✓	✓
LTE700 (Band 28a)	✓	✓
LTE700 (Band 28b)	✓	✓
GSM850	✓	✓
WCDMA850 (Band 5)	✓	✓
LTE850 (Band 5)	✓	✓
WCDMA1700/2100 (Band 4)	✓	✓
LTE1700/2100 (Band 4)	✓	✓
GSM1900	✓	✓
WCDMA1900 (Band 2)	✓	✓
LTE1900 (Band 2)	✓	✓
LTE2500 (Band 7)	–	✓
WLAN2450	✓	–

2.1 Picture Of The Device

See separate report HAC_Photo_RM-1065_03.

3. TEST CONDITIONS

3.1 Temperature and Humidity

Ambient temperature (°C):	20.5 – 22.5
Ambient humidity (RH %):	35 – 55

3.2 Device Control and Parameters

The transmitter of the device was put into operation by using a call tester. Communications between the device and the call tester were established by air link. Speech coding was processed with EFR speech codec for GSM and with AMR 12.2 kbps for WCDMA.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

T-Coil mode was switched on from the device user interface, volume setting was set to maximum and microphone was muted.


In all operating bands the measurements were performed on middle channel.

4. DESCRIPTION OF THE TEST EQUIPMENT

4.1 Measurement System and Components

The measurements were performed using an automated near-field scanning system, DASY52 version 52.6, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland.

Components and signal paths of used measurement system are pictured below:

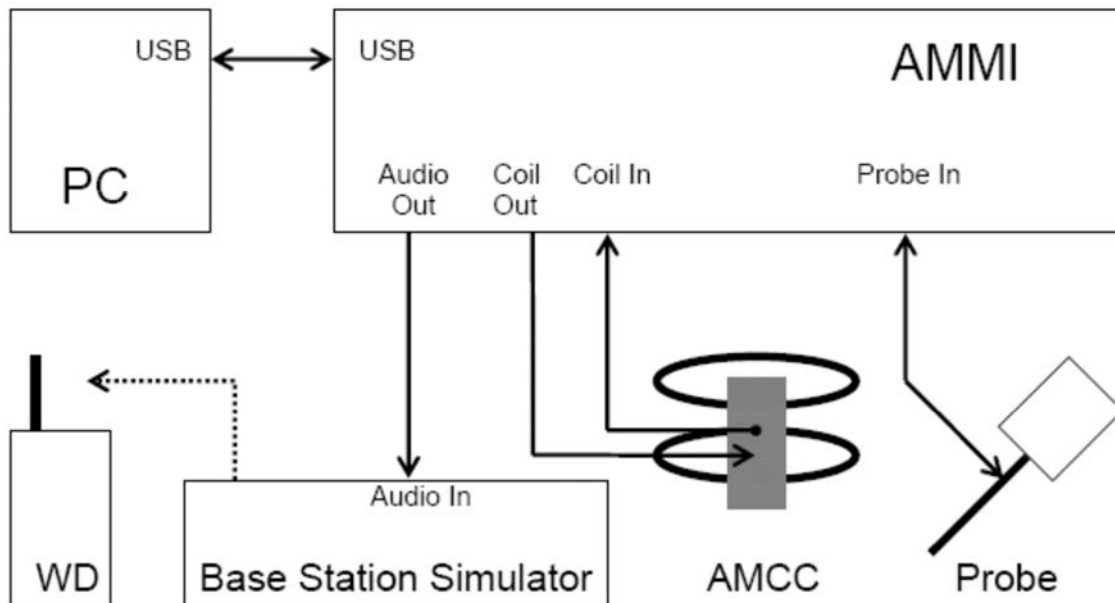

The following table lists calibration dates of measurement equipment:

Test Equipment	Serial Number	Calibration interval	Calibration expiry
R&S CMU200 Radio Communication Test Set	101111	-	-
AM1DV3 Audio Magnetic Probe	3079	12 months	2015-10
AMMI Audio Magnetic Measurement Instrument	1014	-	-
AMCC Helmholtz Audio Magnetic Calibration Coil	1030	-	-

4.1.1 Audio Magnetic Probe AM1DV3

Construction	Fully RF shielded metal construction (RF sensitivity < -100dB)
System calibration	Calibrated using Helmholtz coil according to manufacturers instructions
Frequency range	0.1 – 20 kHz (HOX! test signal is limited to required BW of 300 to 3000 Hz, ANSI C63.19)
Sensitivity	< -50 dB A/m
Dimensions	Overall length: 290 mm; Tip diameter: 6 mm

4.1.2 Audio Magnetic Measurement Instrument AMMI

Sampling Rate	48 kHz / 24 bit
Dynamic Range	85 dB
Test Signal Generation	User selectable and predefined (via PC)
System calibration	Auto-calibration / full system calibration using AMCC with monitor output

4.1.3 Audio Magnetic Calibration Coil AMCC

Dimensions	370 x 370 x 196 mm (ANSI-C63.19 compliant)
-------------------	--

4.1.4 Device Holder

The device holder and Test Arch are manufactured by Speag (www.speag.com). Test arch is used for all tests i.e. for both validation testing and device testing. The holder and test arch conforms to the requirements of ANSI C63.19.

The SPEAG device holder (see Section 5.1) was used to position the test device in all tests.

4.2 Verification of the System

Audio Magnetic Probe AM1D is calibrated in AMCC Helmholtz Audio Magnetic Calibration Coil before each measurement procedure using calibration and reference signals.

R&S CMU200 audio codec and SPEAG AMMI audio paths (gain) were calibrated according to manufacturer's instructions.

5. DESCRIPTION OF THE TEST PROCEDURE

5.1 Test Arch and Device Holder

The test device was placed in the Device Holder (illustrated below) that is supplied by SPEAG. Using this positioner the tested device is positioned under Test Arch.



Device holder and Test Arch supplied by SPEAG

5.2 Test Positions

The device was positioned such that Device Reference Plane was touching the bottom of the Test Arch. The acoustic output is aligned with the intersection of the Test Arch's middle bar and dielectric wire. The WD is positioned always this way to ensure repeatability of the measurements. Coordinate system depicted below is used to define exact locations of measurement points relative to the center of the acoustic output.

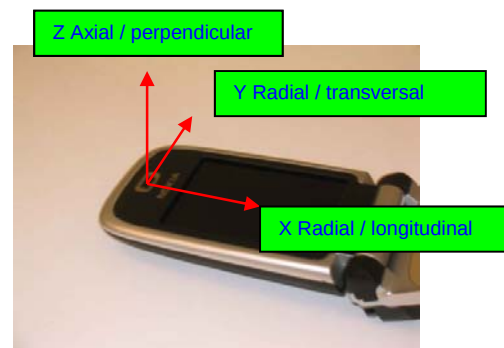


Photo of the device positioned under Test Arch and coordinate system (The EUT in picture is generic phone sample and does not represent the actual equipment under test)

5.3 T-Coil Scan Procedures and Used Test Signals

Manufacturer can either define measurement locations for WD categorization or optimum locations can be found using following procedure: First, large scans in all measurement orientations with dense grid step size are made to find locations of optimum signal. Point scans are made in these locations.

During measurements signal is fed to WD via communication tester. Proper gain setting is used in software to ensure correct signal level fed to communication tester speech input. Measurement software compares fed signal and signal from measurement probe and applies proper filtering and integration procedures.

Broadband voice-like signal (300...3000Hz) is used during scans and frequency response measurement to ensure proper operation of WD vocoder and audio enhancement algorithms.

In final measurement sine signal is used to determine signal strength @ 1 kHz. Both signal (ABM1) and undesired audio noise (ABM2) are measured consequently to enable determination of signal to noise ratio (SNR).

5.4 T-Coil Requirements and Category Limits

RF Emissions

Wireless device has to fulfill RF emission requirements at the axial measurement location.

Axial and Transversal Field Intensity

T-Coil signal magnetic field shall be $\geq -18\text{dB(A/m)}$ at 1 kHz, in 1/3 octave band filter for both orientations.


Signal Quality

The worst result of two T-Coil signal measurements is used to determine the T-Coil mode category:

Category	T1	T2	T3	T4
Limits for Signal Quality	0	10	20	30

Frequency Response

Frequency response of the axial component must be between the limits pointed by frequency curves below:

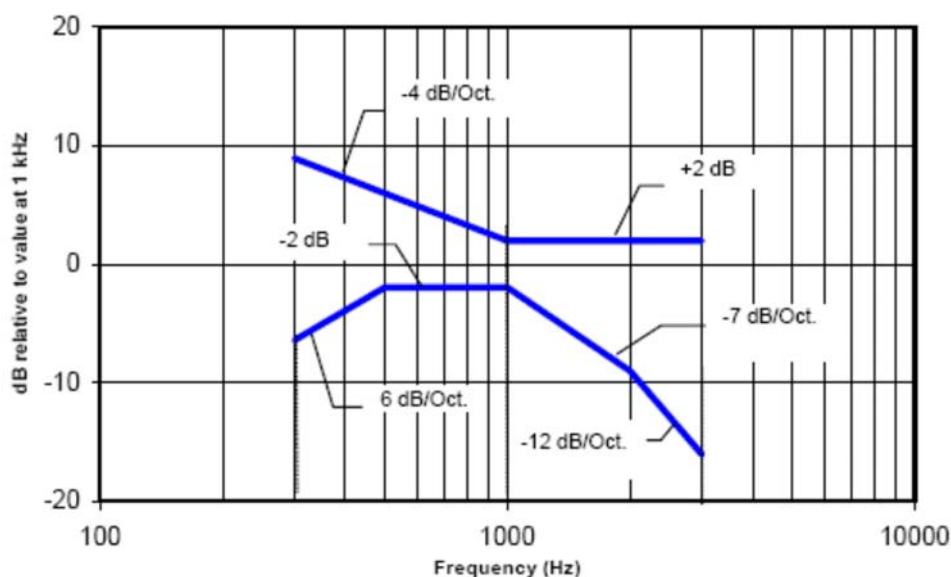

Magnetic field frequency response for devices with a field that exceeds -15dB (A/m) @ 1kHz.

6. MEASUREMENT UNCERTAINTY

Source of Uncertainty	Tolerance ±%	Probability Distribution	Div.	c ABM 1	c ABM 2	Standard Uncertainty ±%, ABM1	Standard Uncertainty ±%, ABM2
PROBE SENSITIVITY							
Reference level	3.0	N	1.0	1	1	3.0	3.0
AMCC geometry	0.4	R	√3	1	1	0.2	0.2
AMCC current	0.6	R	√3	1	1	0.4	0.4
Probe positioning during calibration	0.1	R	√3	1	1	0.1	0.1
Noise contribution	0.7	R	√3	0.014 3	1	0.0	0.4
Frequency slope	5.9	R	√3	0.1	1.0	0.3	3.5
PROBE SYSTEM							
Repeatability / Drift	1.0	R	√3	1	1	0.6	0.6
Linearity / Dynamic range	0.6	R	√3	1	1	0.4	0.4
Acoustic noise	1.0	R	√3	0.1	1	0.1	0.6
Probe angle	2.3	R	√3	1	1	1.4	1.4
Spectral processing	0.9	R	√3	1	1	0.5	0.5
Integration time	0.6	N	1.0	1	5	0.6	3.0
Field disturbance	0.2	R	√3	1	1	0.1	0.1
TEST SIGNAL							
Reference signal spectral response	0.6	R	√3	0	1	0.0	0.4
POSITIONING							
Probe positioning	1.9	R	√3	1	1	1.1	1.1
Phantom thickness	0.9	R	√3	1	1	0.5	0.5
EUT Positioning	1.9	R	√3	1	1	1.1	1.1
EXTERNAL CONTRIBUTIONS							
RF interference	0.0	R	√3	1	1	0.0	0.0
Test signal variation	2.0	R	√3	1	1	1.2	1.2
COMBINED UNCERTAINTY							
Combined Standard Uncertainty (ABM field)						4.1	6.1
Expanded Standard Uncertainty [%]						8.1	12.3

7. RESULTS

Measurement location coordinates are defined as deviation from earpiece center in millimeters.
Coordinate system is defined in chapter 4.2

Axial measurement location was defined by the manufacturer of the device as the center of the earpiece.
Maximum values for axial field are listed for informative purposes although results at earpiece center were used in evaluating T-category of the device.

GSM850 results – Antenna 1

	Transversal (y)		Axial (z)	
			Max signal	
	x	y	x	y
Measurement location (x,y) [mm]	0.0	-12.0	0.5	-5.0
Signal strength [dB A/m]	-4.51		3.79	
ABM2 [dB A/m]	-45.63		-36.54	
Signal quality [dB]	41.12		40.33	
Ambient background noise at point (0,0) ABM [dB A/m]	-49.97		-50.01	

GSM850 results – Antenna 2

	Transversal (y)		Axial (z)	
			Max signal	
	x	y	x	y
Measurement location (x,y) [mm]	0.5	2.0	0.5	-5.0
Signal strength [dB A/m]	-4.55		3.82	
ABM2 [dB A/m]	-45.63		-35.81	
Signal quality [dB]	41.08		39.63	
Ambient background noise at point (0,0) ABM [dB A/m]	-49.97		-50.01	

WCDMA850 (Band 5) results – Antenna 1

	Transversal (y)		Axial (z)	
			Max signal	
	x	y	x	y
Measurement location (x,y) [mm]	1.0	-11.5	-3.0	-5.0
Signal strength [dB A/m]	-4.93		1.53	
ABM2 [dB A/m]	-46.09		-41.50	
Signal quality [dB]	41.16		43.03	
Ambient background noise at point (0,0) ABM [dB A/m]	-49.97		-50.01	

WCDMA850 (Band 5) results – Antenna 2

	Transversal (y)		Axial (z)	
			Max signal	
	x	y	x	y
Measurement location (x,y) [mm]	0.0	-12.0	2.5	-4.0
Signal strength [dB A/m]	-4.89		2.88	
ABM2 [dB A/m]	-46.61		-40.17	
Signal quality [dB]	41.72		43.05	
Ambient background noise at point (0,0) ABM [dB A/m]	-49.97		-50.01	

WCDMA1700/2100 (Band 4) results – Antenna 1

	Transversal (y)		Axial (z)	
			Max signal	
	x	y	x	y
Measurement location (x,y) [mm]	1.0	-12.0	3.0	-5.0
Signal strength [dB A/m]	-4.63		2.63	
ABM2 [dB A/m]	-46.06		-32.85	
Signal quality [dB]	41.43		35.48	
Ambient background noise at point (0,0) ABM [dB A/m]	-49.97		-50.01	

WCDMA1700/2100 (Band 4) results – Antenna 2

	Transversal (y)		Axial (z)	
			Max signal	
	x	y	x	y
Measurement location (x,y) [mm]	1.5	2.0	2.0	-2.5
Signal strength [dB A/m]	-4.95		2.40	
ABM2 [dB A/m]	-45.94		-40.40	
Signal quality [dB]	40.99		42.80	
Ambient background noise at point (0,0) ABM [dB A/m]	-49.97		-50.01	

GSM1900 results – Antenna 1

	Transversal (y)		Axial (z)	
			Max signal	
	x	y	x	y
Measurement location (x,y) [mm]	1.0	2.5	0.5	-5.0
Signal strength [dB A/m]	-4.44		3.83	
ABM2 [dB A/m]	-46.09		-38.30	
Signal quality [dB]	41.65		42.13	
Ambient background noise at point (0,0) ABM [dB A/m]	-49.97		-50.01	

GSM1900 results – Antenna 2

	Transversal (y)		Axial (z)	
			Max signal	
	x	y	x	y
Measurement location (x,y) [mm]	0.5	2.0	0.0	-5.0
Signal strength [dB A/m]	-4.50		3.70	
ABM2 [dB A/m]	-45.80		-37.70	
Signal quality [dB]	41.30		41.40	
Ambient background noise at point (0,0) ABM [dB A/m]	-49.97		-50.01	

WCDMA1900 (Band 2) results – Antenna 1

	Transversal (y)		Axial (z)	
			Max signal	
	x	y	x	y
Measurement location (x,y) [mm]	0.5	-12.0	2.5	-3.5
Signal strength [dB A/m]	-4.84		2.51	
ABM2 [dB A/m]	-45.98		-40.70	
Signal quality [dB]	41.14		43.21	
Ambient background noise at point (0,0) ABM [dB A/m]	-49.97		-50.01	

WCDMA1900 (Band 2) results – Antenna 2

	Transversal (y)		Axial (z)	
			Max signal	
	x	y	x	y
Measurement location (x,y) [mm]	0.5	-11.5	-3.0	-8.0
Signal strength [dB A/m]	-4.97		0.68	
ABM2 [dB A/m]	-46.21		-41.56	
Signal quality [dB]	41.24		42.24	
Ambient background noise at point (0,0) ABM [dB A/m]	-49.97		-50.01	

Plots of the measurement scans are presented in Appendix A.

APPENDIX A: MEASUREMENT SCANS

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079
- ; Calibrated: 2014-10-15
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-11-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/GSM850 - Antenna 1/z (axial) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/GSM850 - Antenna 1/point scan at best SNR(z)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav



Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 40.33 dB

ABM1 comp = 3.79 dBA/m

Location: 0.5, -5, 3.7 mm

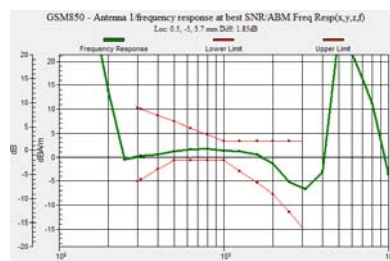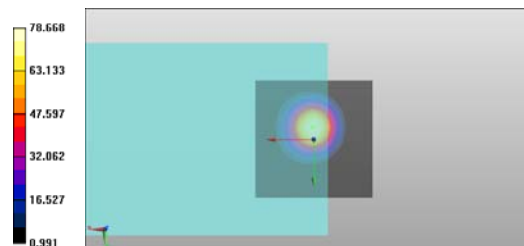

HAC Report

Appendix A for T-Coil_RM-1065_02

Applicant: Microsoft

Type: RM-1065

Copyright © 2015 TCC Microsoft

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079
- ; Calibrated: 2014-10-15
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-11-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/GSM850 - Antenna 2/z (axial) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/GSM850 - Antenna 2/point scan at best SNR(z)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav



Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 39.63 dB

ABM1 comp = 3.82 dBA/m

Location: 0.5, -5, 3.7 mm

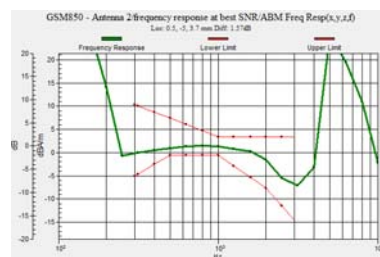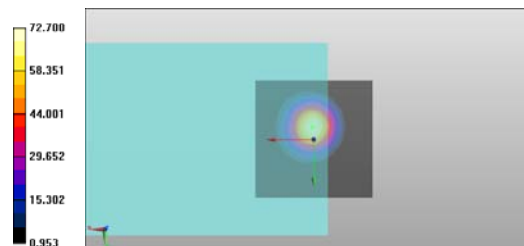

HAC Report

Appendix A for T-Coil_RM-1065_02

Applicant: Microsoft

Type: RM-1065

Copyright © 2015 TCC Microsoft

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: WCDMA850 (Band 5)

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079

- ; Calibrated: 2014-10-15

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2014-11-03

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/WCDMA850 (Band 5) - Antenna 1/z (axial) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/WCDMA850 (Band 5) - Antenna 1/point scan at best SNR(z)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav



Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 43.03 dB

ABM1 comp = 1.53 dBA/m

Location: -3, -5, 3.7 mm

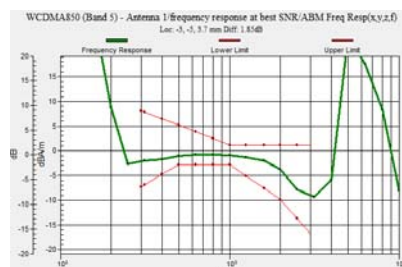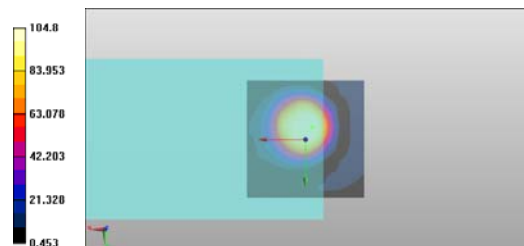

HAC Report

Appendix A for T-Coil_RM-1065_02

Applicant: Microsoft

Type: RM-1065

Copyright © 2015 TCC Microsoft

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: WCDMA850 (Band 5)

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079

- ; Calibrated: 2014-10-15

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2014-11-03

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/WCDMA850 (Band 5) - Antenna 2/z (axial) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/WCDMA850 (Band 5) - Antenna 2/point scan at best SNR(z)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav



Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 43.05 dB

ABM1 comp = 2.88 dBA/m

Location: 2.5, -4, 3.7 mm

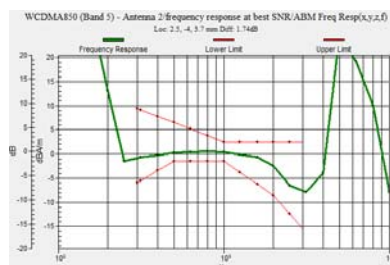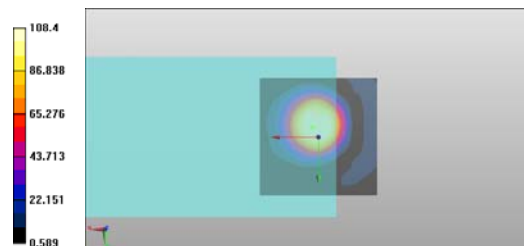

HAC Report

Appendix A for T-Coil_RM-1065_02

Applicant: Microsoft

Type: RM-1065

Copyright © 2015 TCC Microsoft

Date/Time: 2015-01-16 09:21:42

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: WCDMA1700/2100 (Band 4)

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079
- ; Calibrated: 2014-10-15
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-11-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/WCDMA1700/2100 (Band 4) - Antenna 1/z (axial) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/WCDMA1700/2100 (Band 4) - Antenna 1/point scan at best SNR(z)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav



Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 35.48 dB

ABM1 comp = 2.63 dBA/m

Location: 3, -5, 3.7 mm

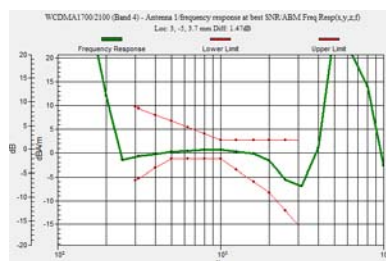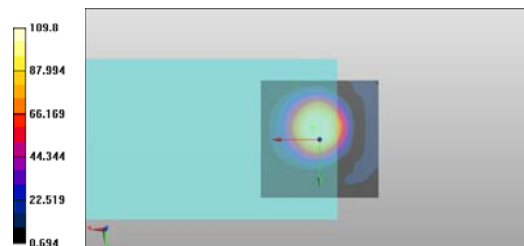

HAC Report

Appendix A for T-Coil_RM-1065_02

Applicant: Microsoft

Type: RM-1065

Copyright © 2015 TCC Microsoft

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: WCDMA1700/2100 (Band 4)

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079

- ; Calibrated: 2014-10-15

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2014-11-03

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/WCDMA1700/2100 (Band 4) - Antenna 2/z (axial) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/WCDMA1700/2100 (Band 4) - Antenna 2/point scan at best SNR(z)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav



Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 42.80 dB

ABM1 comp = 2.40 dBA/m

Location: 2, -2.5, 3.7 mm

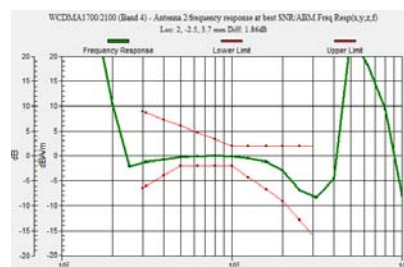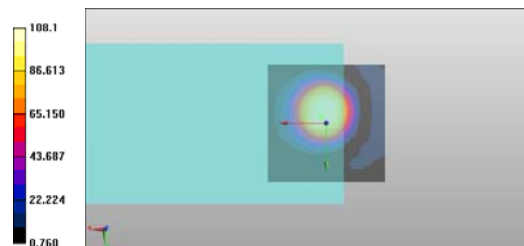

HAC Report

Appendix A for T-Coil_RM-1065_02

Applicant: Microsoft

Type: RM-1065

Copyright © 2015 TCC Microsoft

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079
- ; Calibrated: 2014-10-15
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-11-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/GSM1900 - Antenna 1/z (axial) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/GSM1900 - Antenna 1/point scan at best SNR(z)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav



Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 42.13 dB

ABM1 comp = 3.83 dBA/m

Location: 0.5, -5, 3.7 mm

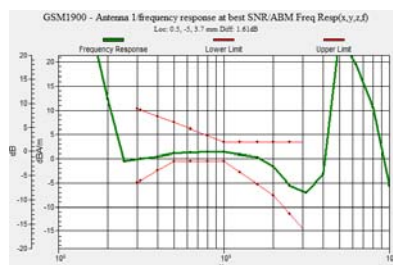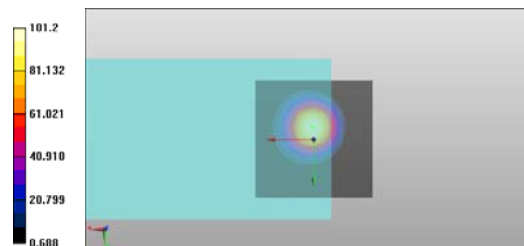

HAC Report

Appendix A for T-Coil_RM-1065_02

Applicant: Microsoft

Type: RM-1065

Copyright © 2015 TCC Microsoft

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079
- ; Calibrated: 2014-10-15
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-11-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/GSM1900 - Antenna 2/z (axial) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/GSM1900 - Antenna 2/point scan at best SNR(z)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav



Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 41.40 dB

ABM1 comp = 3.70 dBA/m

Location: 0, -5, 3.7 mm

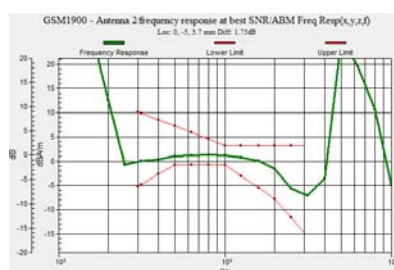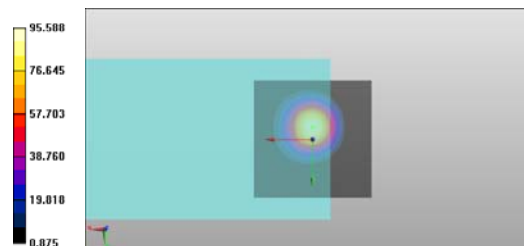

HAC Report

Appendix A for T-Coil_RM-1065_02

Applicant: Microsoft

Type: RM-1065

Copyright © 2015 TCC Microsoft

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: WCDMA1900 (Band 2)

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079
- ; Calibrated: 2014-10-15
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-11-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/WCDMA1900 (Band 2) - Antenna 1/z (axial) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/WCDMA1900 (Band 2) - Antenna 1/point scan at best SNR(z)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav



Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 43.21 dB

ABM1 comp = 2.51 dBA/m

Location: 2.5, -3.5, 3.7 mm

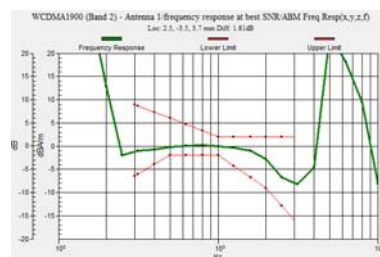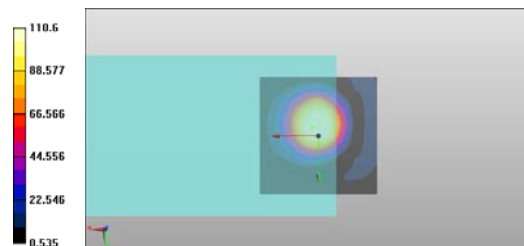

HAC Report

Appendix A for T-Coil_RM-1065_02

Applicant: Microsoft

Type: RM-1065

Copyright © 2015 TCC Microsoft

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: WCDMA1900 (Band 2)

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079

- ; Calibrated: 2014-10-15

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2014-11-03

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/WCDMA1900 (Band 2) - Antenna 2/z (axial) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/WCDMA1900 (Band 2) - Antenna 2/point scan at best SNR(z)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav



Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 42.24 dB

ABM1 comp = 0.68 dBA/m

Location: -3, -8, 3.7 mm

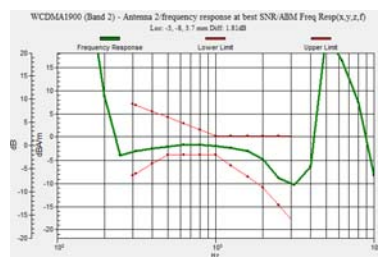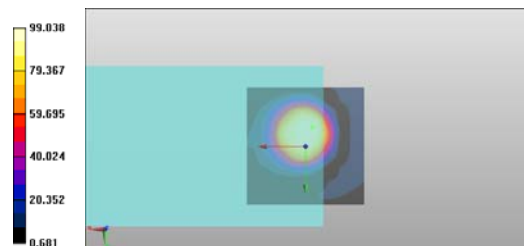

Date/Time: 2015-01-15 10:30:02

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079

- ; Calibrated: 2014-10-15

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2014-11-03

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/GSM850 - Antenna 1/y (transversal) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/GSM850 - Antenna 1/point scan (y)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav


Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 41.12 dB

ABM1 comp = -4.51 dBA/m

Location: 0, -12, 3.7 mm

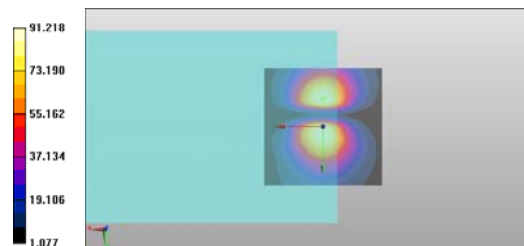

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: GSM850

Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079
- ; Calibrated: 2014-10-15
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-11-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/GSM850 - Antenna 2/y (transversal) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/GSM850 - Antenna 2/point scan (y)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav


Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 41.08 dB

ABM1 comp = -4.55 dBA/m

Location: 0.5, 2, 3.7 mm

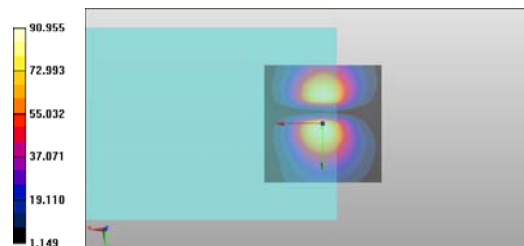

Date/Time: 2015-01-15 14:26:22

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: WCDMA850 (Band 5)

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079

- ; Calibrated: 2014-10-15

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2014-11-03

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/WCDMA850 (Band 5) - Antenna 1/y (transversal) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/WCDMA850 (Band 5) - Antenna 1/point scan (y)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav


Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 41.16 dB

ABM1 comp = -4.93 dBA/m

Location: 1, -11.5, 3.7 mm

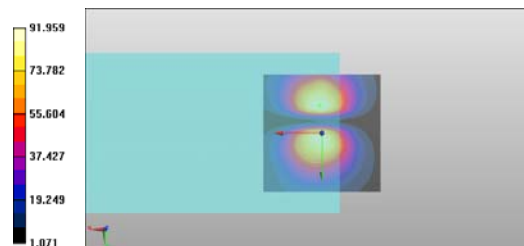

Date/Time: 2015-01-15 15:09:35

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: WCDMA850 (Band 5)

Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079

- ; Calibrated: 2014-10-15

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2014-11-03

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/WCDMA850 (Band 5) - Antenna 2/y (transversal) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/WCDMA850 (Band 5) - Antenna 2/point scan (y)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav


Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 41.72 dB

ABM1 comp = -4.89 dBA/m

Location: 0, -12, 3.7 mm

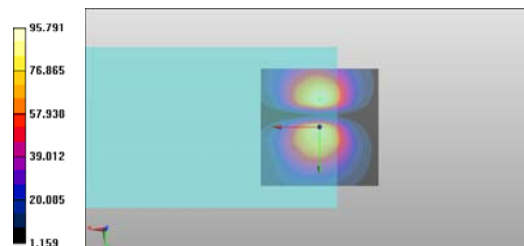

Date/Time: 2015-01-16 09:37:54

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: WCDMA1700/2100 (Band 4)

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079

- ; Calibrated: 2014-10-15

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2014-11-03

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/WCDMA1700/2100 (Band 4) - Antenna 1/y (transversal) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/WCDMA1700/2100 (Band 4) - Antenna 1/point scan (y)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav


Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 41.43 dB

ABM1 comp = -4.63 dBA/m

Location: 1, -12, 3.7 mm

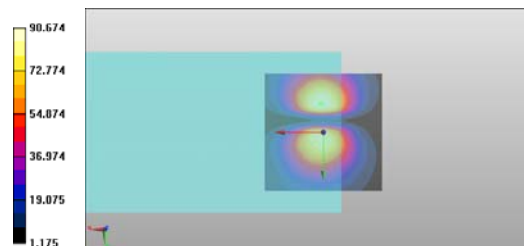

Date/Time: 2015-01-16 10:24:26

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: WCDMA1700/2100 (Band 4)

Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079
- ; Calibrated: 2014-10-15
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn555; Calibrated: 2014-11-03
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/WCDMA1700/2100 (Band 4) - Antenna 2/y (transversal) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/WCDMA1700/2100 (Band 4) - Antenna 2/point scan (y)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav


Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 40.99 dB

ABM1 comp = -4.95 dBA/m

Location: 1.5, 2, 3.7 mm

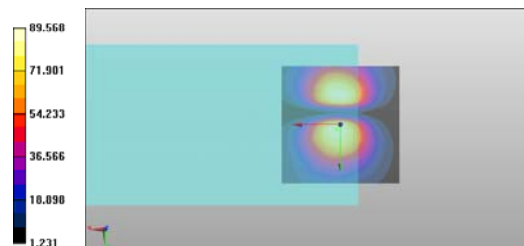

Date/Time: 2015-01-15 12:08:11

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079

- ; Calibrated: 2014-10-15

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2014-11-03

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/GSM1900 - Antenna 1/y (transversal) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/GSM1900 - Antenna 1/point scan (y)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav


Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 41.65 dB

ABM1 comp = -4.44 dBA/m

Location: 1, 2.5, 3.7 mm

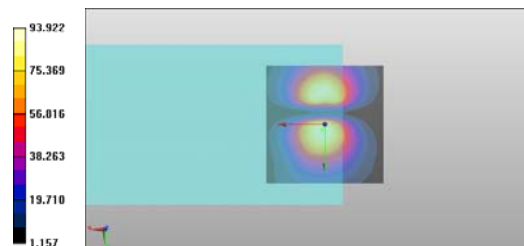

Date/Time: 2015-01-15 12:52:20

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: GSM1900

Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079

- ; Calibrated: 2014-10-15

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2014-11-03

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/GSM1900 - Antenna 2/y (transversal) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/GSM1900 - Antenna 2/point scan (y)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav


Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 41.30 dB

ABM1 comp = -4.50 dBA/m

Location: 0.5, 2, 3.7 mm

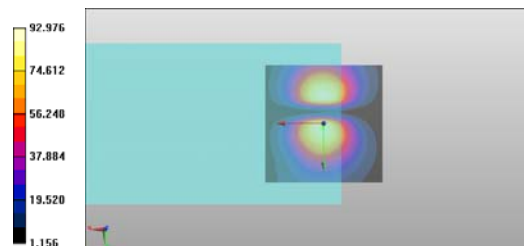

Date/Time: 2015-01-16 07:49:53

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: WCDMA1900 (Band 2)

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079

- ; Calibrated: 2014-10-15

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2014-11-03

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/WCDMA1900 (Band 2) - Antenna 1/y (transversal) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/WCDMA1900 (Band 2) - Antenna 1/point scan (y)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav


Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 41.14 dB

ABM1 comp = -4.84 dBA/m

Location: 0.5, -12, 3.7 mm

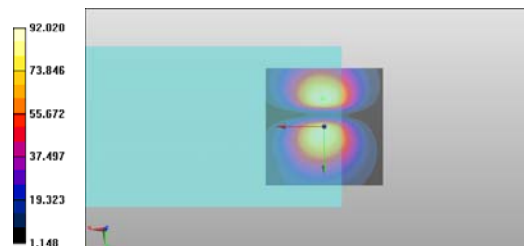

Date/Time: 2015-01-16 08:40:41

Test Laboratory: TCC Microsoft

Type: RM-1065; Serial: 004402/74/107052/2, 004402/74/107053/0

Communication System: WCDMA1900 (Band 2)

Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air; Medium Notes: -

Medium parameters used: $\sigma = 0 \text{ S/m}$, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3079

- ; Calibrated: 2014-10-15

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn555; Calibrated: 2014-11-03

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: -

- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

T-Coil/WCDMA1900 (Band 2) - Antenna 2/y (transversal) coarse scan/ABM Interpolated SNR(x,y,z) (101x101x1):

Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav

Output Gain: 54.1

Device Reference Point: 0, 0, -6.3 mm

T-Coil/WCDMA1900 (Band 2) - Antenna 2/point scan (y)/ABM SNR(x,y,z) (1x1x1):

Signal Type: Audio File (.wav) 48k_1.025kHz_10s.wav


Output Gain: 8.46

Device Reference Point: 0, 0, -6.3 mm

ABM1/ABM2 = 41.24 dB

ABM1 comp = -4.97 dBA/m

Location: 0.5, -11.5, 3.7 mm

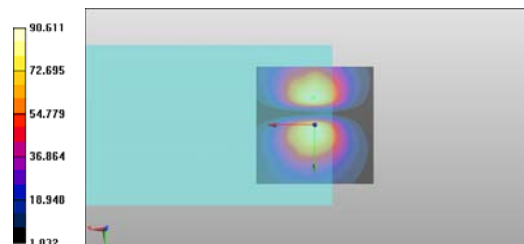

APPENDIX B: AUDIO MAGNETIC PROBE AM1DV3 CALIBRATION DOCUMENT



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TCC Microsoft**

Certificate No: **AM1DV3-3079_Oct14**

CALIBRATION CERTIFICATE

Object **AM1DV3 - SN: 3079**

Calibration procedure(s) **QA CAL-24.v3**
Calibration procedure for AM1D magnetic field probes and TMFS in the audio range

Calibration date: **October 15, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	03-Oct-14 (No:15573)	Oct-15
Reference Probe AM1DV2	SN: 1008	14-Jan-14 (No. AM1D-1008_Jan14)	Jan-15
DAE4	SN: 781	12-Sep-14 (No. DAE4-781_Sep14)	Sep-15

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
AMCC	1050	01-Oct-13 (in house check Oct-13)	Oct-16
AMMI Audio Measuring Instrument	1062	26-Sep-12 (in house check Sep-12)	Sep-15

	Name	Function	Signature
Calibrated by:	Leif Klysner	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: October 15, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

AM1D probe identification and configuration data

Item	AM1DV3 Audio Magnetic 1D Field Probe
Type No	SP AM1 001 BA
Serial No	3079

Overall length	296 mm
Tip diameter	6.0 mm (at the tip)
Sensor offset	3.0 mm (centre of sensor from tip)
Internal Amplifier	20 dB

Manufacturer / Origin	Schmid & Partner Engineering AG, Zürich, Switzerland
Manufacturing date	March 31, 2010
Last calibration date	June 14, 2013

Calibration data

Connector rotation angle	(in DASY system)	142.1 °	+/- 3.6 ° (k=2)
Sensor angle	(in DASY system)	0.56 °	+/- 0.5 ° (k=2)
Sensitivity at 1 kHz	(in DASY system)	0.00739 V / (A/m)	+/- 2.2 % (k=2)

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.