



Microsoft Mobile Oy

Application
For
Certification

FCC ID: PYADT-903

Wireless Charging Plate

Model: DT-903 (HW:1.8, MW:2.0, WLC FW:V0049, BT FW:V1.0)

Transmitter

Report No.: 140701012SZN-001

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-01-13]

Prepared and Checked by:

Approved by:

Sign on file

Leo Lai
Project Engineer

Andy Yan
Senior Project Engineer
Date: September 12, 2014

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C_Tx_b

Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch

6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751 Website: www.china.intertek-etlsemko.com

INTERTEK TESTING SERVICES

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labeling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information
<i>EXHIBIT 9:</i>	Test Equipment List

INTERTEK TESTING SERVICES

MEASUREMENT / TECHNICAL REPORT

Microsoft Mobile Oy

MODEL: DT-903 (HW:1.8, MW:2.0, WLC FW:V0049, BT FW:V1.0)

FCC ID: PYADT-903

This report concerns (check one:) Original Grant ☒ Class II Change ☐

Equipment Type: DCD-Low Power Transmitter Below 1705 KHz

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes ☐ No ☒

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes ☐ No ☒

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-01-13 Edition] provision.

Report prepared by:

Leo Lai
Intertek Testing Services Shenzhen Ltd.
Kejiyuan Branch
6F, Block D, Huahan Building, Langshan Road,
Nanshan District, Shenzhen, P. R. China
Phone: (86 755) 8614 0661
Fax: (86 755) 8601 6751

INTERTEK TESTING SERVICES

Table of Contents

1.0	<u>General Description</u>	2
1.1	Product Description	2
1.2	Related Submittal(s) Grants	2
1.3	Test Methodology	2
1.4	Test Facility	2
2.0	<u>System Test Configuration</u>	4
2.1	Justification	4
2.2	EUT Exercising Software	4
2.3	Special Accessories	4
2.4	Equipment Modification	4
2.5	Measurement Uncertainty	5
2.6	Support Equipment List and Description	5
3.0	<u>Emission Results</u>	7
3.1	Field Strength Calculation	8
3.2	Radiated Emission Data and Configuration Photograph	9
3.3	Conducted Emission Data and Configuration Photograph	11
4.0	<u>Equipment Photographs</u>	16
5.0	<u>Product Labelling</u>	18
6.0	<u>Technical Specifications</u>	20
7.0	<u>Instruction Manual</u>	22
8.0	<u>Miscellaneous Information</u>	24
8.1	Emissions Test Procedures	24
9.0	<u>Test Equipment List</u>	26

INTERTEK TESTING SERVICES

List of attached file

Exhibit Type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated photos	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
External Photo	External Photos	external photos.pdf
Internal Photo	Internal Photos	internal photos.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
Block Diagram	Block Diagram	block.pdf
ID Label / Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Letter of Agency	agency.pdf

INTERTEK TESTING SERVICES

EXHIBIT 1

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The equipment under test (EUT) is a Wireless Charging Plate operating at the frequency range 110KHz-150KHz. The EUT is powered by DC5.2V from Adapter or PC. You can charge your phone or other compatible device without the hassle of untangling charger cables. Just pop your phone on the charging plate to start charging.

Antenna Type: Integral antenna (embedded coil antenna)
For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is an application for certification of the Wireless Charging portion.
Remaining portion is subject to the following procedures:
Bluetooth BLE: 140701012SZN-003.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements was performed according to the procedures in ANSI C63.4 (2009). Radiated emission measurement was performed in Semi-anechoic chamber. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

1.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch** and located at 6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: 242492).

INTERTEK TESTING SERVICES

EXHIBIT 2

SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

2.0 **System Test Configuration**

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009).

The EUT was powered by DC 5.2V from the Adapter with AC 120V 60Hz during the test and the simultaneous transmission spurious was tested only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emission at and above 30 MHz, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data report in Exhibit 3.0.

The EUT was centred laterally (left to right facing the tabletop) on the Tabletop with the rear of the unit flush with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on turntable, which enabled the Engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

N/A.

2.3 Special Accessories

No special accessory.

2.4 Equipment Modification

Any modifications installed previous to testing by Microsoft Mobile Oy will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch.

INTERTEK TESTING SERVICES

2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

2.6 Support Equipment List and Description

This product was tested in the following configuration:

Refer List:

Description	Manufacturer	Model No.
Mobile Phone	Nokia	Lumia 920
AC Charger	Nokia	AC-60C

INTERTEK TESTING SERVICES

EXHIBIT 3

EMISSION RESULTS

INTERTEK TESTING SERVICES

3.0 **Emission Results**

Data is included worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

INTERTEK TESTING SERVICES

3.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where FS = Field Strength in dB μ V/m

RA = Receiver Amplitude (including preamplifier) in dB μ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0dB μ V is obtained. The antenna factor of 7.4dB and cable factor of 1.6dB is added. The amplifier gain of 29dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0dB, and the resultant average factor was -10dB. The net field strength for comparison to the appropriate emission limit is 32dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 62.0\text{dB}\mu\text{V}$$

$$AF = 7.4\text{dB}$$

$$CF = 1.6\text{dB}$$

$$AG = 29.0\text{dB}$$

$$PD = 0\text{dB}$$

$$AV = -10\text{dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32\text{dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8\mu\text{V/m}$$

INTERTEK TESTING SERVICES

3.2 Radiated Emission Data and Configuration Photograph

The simultaneous transmission spurious was considered and the worst case Radiated Emission is at 162.810 MHz as below

Judgement: Passed by 8.3 dB

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos.pdf.

TEST PERSONNEL:

Sign on file

Leo Lai, Project Engineer

Typed / Printed Name

July 8, 2014

Date

INTERTEK TESTING SERVICES

Company: Microsoft Mobile Oy Date of Test: July 8, 2014
Model: DT-903 (HW:1.8, MW:2.0, WLC FW:V0049, BT FW:V1.0)
Operating Mode: Wireless charging at 137KHz with BT Link

Table 1

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
Vertical	0.137	47.1	0.0	14.8	61.9	104.9	-43.0
Vertical	0.414	37.7	0.0	15.1	52.8	95.3	-42.5
Horizontal	246.420	45.1	20.0	8.3	33.4	46.0	-12.6
Horizontal	162.910	40.5	20.0	10.1	30.6	43.5	-12.9
Horizontal	297.720	38.2	20.0	14.4	32.6	46.0	-13.4
Vertical	162.900	40.2	20.0	14.6	34.8	43.5	-8.7
Vertical	249.720	40.8	20.0	12.1	32.9	46.0	-13.1
Vertical	412.680	42.1	20.0	9.1	31.2	46.0	-14.8

NOTES:

1. Average detector is used for 9~90 KHz, 110~490 KHz and Quasi-Peak detector is used for other frequency band.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3 meter distances were measured at 0.3- meter and an inverse proportional extrapolation was performed to compare the signal level to the 3 meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Loop Antenna was used for the frequency band below 30MHz.
5. The formula of limit at frequencies below 30MHz is extrapolated according to FCC part 15.31 (f) as below.
Limit dBuV/m at 3m = Limit dBuV/m at 300m + 40log(300/3) dB
Limit dBuV/m at 3m = Limit dBuV/m at 30m + 40log(30/3) dB

Test Engineer: Leo Lai

INTERTEK TESTING SERVICES

Company: Microsoft Mobile Oy Date of Test: July 8, 2014
Model: DT-903 (HW:1.8, MW:2.0, WLC FW:V0049, BT FW:V1.0)
Operating Mode: Wireless charging at 130KHz with BT Link

Table 1

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
Vertical	0.130	69.2	0.0	14.8	84.0	105.3	-21.3
Vertical	0.390	40.3	0.0	15.1	55.4	95.8	-40.4
Horizontal	167.280	43.8	20.0	8.3	32.1	43.5	-11.4
Horizontal	246.510	43.5	20.0	10.1	33.6	46.0	-12.4
Horizontal	297.490	35.7	20.0	14.4	30.1	46.0	-15.9
Vertical	162.810	40.6	20.0	14.6	35.2	43.5	-8.3
Vertical	249.732	40.6	20.0	12.1	32.7	46.0	-13.3
Vertical	412.668	42.2	20.0	9.1	31.3	46.0	-14.7

NOTES:

1. Average detector is used for 9~90 KHz, 110~490 KHz and Quasi-Peak detector is used for other frequency band.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3 meter distances were measured at 0.3- meter and an inverse proportional extrapolation was performed to compare the signal level to the 3 meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Loop Antenna was used for the frequency band below 30MHz.
5. The formula of limit at frequencies below 30MHz is extrapolated according to FCC part 15.31 (f) as below.
Limit dBuV/m at 3m = Limit dBuV/m at 300m + 40log(300/3) dB
Limit dBuV/m at 3m = Limit dBuV/m at 30m + 40log(30/3) dB

Test Engineer: Leo Lai

INTERTEK TESTING SERVICES

3.3 Conducted Emission and Data Configuration Photograph

Worst Case Conducted Configuration
at
0.734 MHz

Judgement: Passed by 13.8 dB margin

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

TEST PERSONNEL:

Sign on file

Leo Lai, Project Engineer
Typed/Printed Name

July 8, 2014
Date

INTERTEK TESTING SERVICES

Applicant: Microsoft Mobile Oy


Date of Test: July 8, 2014

Model: DT-903 (HW:1.8, MW:2.0, WLC FW:V0049, BT FW:V1.0)

Sample: 1/1

Worst Case Operating Mode: Transmit with Charging

Conducted Emission Test - FCC

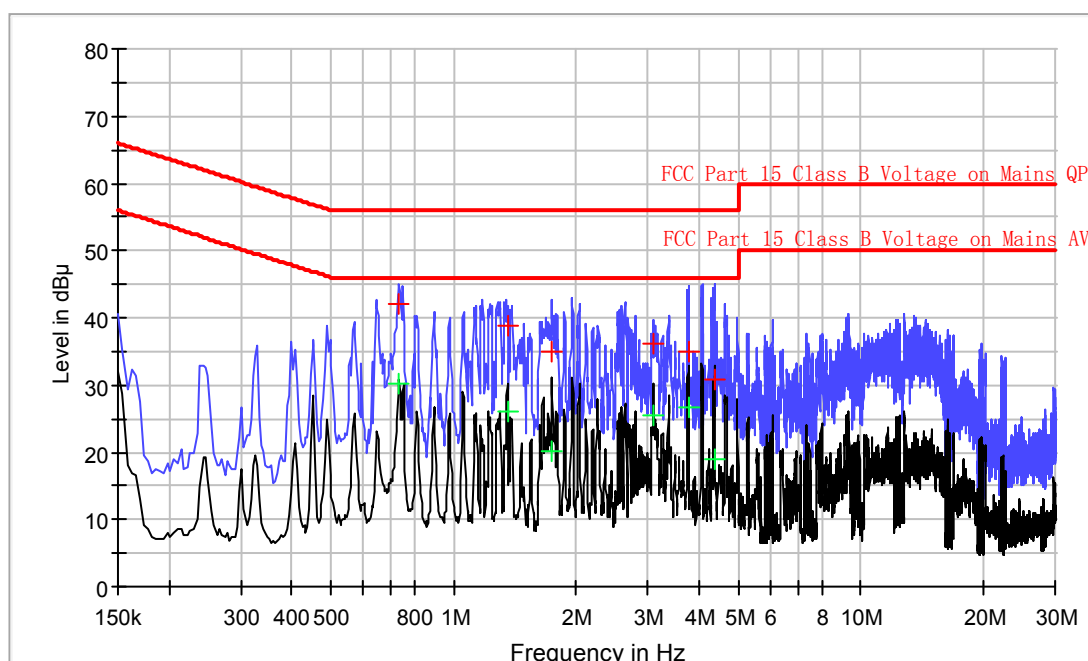

Result Table QP

Frequency (MHz)	QuasiPeak (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.734000	42.2	L1	9.5	13.8	56.0
1.354000	38.9	L1	9.8	17.1	56.0
1.746000	35.1	L1	9.8	20.9	56.0
3.090000	36.1	L1	9.8	19.9	56.0
3.770000	35.1	L1	9.8	20.9	56.0
4.374000	30.7	L1	9.9	25.3	56.0

Result Table AV

Frequency (MHz)	Average (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.734000	30.3	L1	9.5	15.7	46.0
1.354000	26.1	L1	9.8	19.9	46.0
1.746000	20.2	L1	9.8	25.8	46.0
3.090000	25.4	L1	9.8	20.6	46.0
3.770000	26.7	L1	9.8	19.3	46.0
4.374000	18.9	L1	9.9	27.1	46.0

INTERTEK TESTING SERVICES

Applicant: Microsoft Mobile Oy


Date of Test: July 8, 2014

Model: DT-903 (HW:1.8, MW:2.0, WLC FW:V0049, BT FW:V1.0)

Sample: 1/1

Worst Case Operating Mode: Transmit with Charging

Conducted Emission Test - FCC

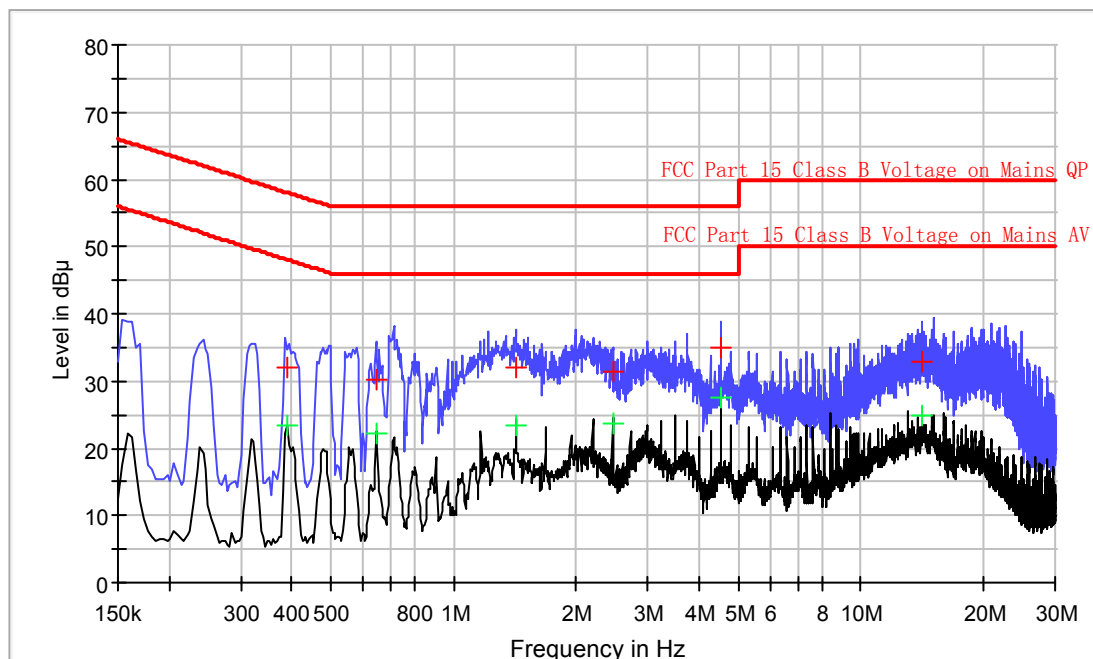

Result Table QP

Frequency (MHz)	QuasiPeak (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.390000	31.9	N	9.6	26.2	58.1
0.646000	30.2	N	9.4	25.8	56.0
1.426000	32.1	N	9.8	23.9	56.0
2.458000	31.5	N	9.8	24.5	56.0
4.530000	35.1	N	9.9	20.9	56.0
14.102000	32.9	N	10.3	27.1	60.0

Result Table AV

Frequency (MHz)	Average (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.390000	23.5	N	9.6	24.6	48.1
0.646000	22.2	N	9.4	23.8	46.0
1.426000	23.4	N	9.8	22.6	46.0
2.458000	23.8	N	9.8	22.2	46.0
4.530000	27.6	N	9.9	18.4	46.0
14.102000	24.9	N	10.3	25.1	50.0

INTERTEK TESTING SERVICES

EXHIBIT 4

EQUIPMENT PHOTOGRAPHS

INTERTEK TESTING SERVICES

4.0 **Equipment Photographs**

For electronic filing, photographs of the tested EUT are saved with filename: external photos.pdf and internal photos.pdf.

EXHIBIT 5
PRODUCT LABELLING

INTERTEK TESTING SERVICES

5.0 **Product Labelling**

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

INTERTEK TESTING SERVICES

EXHIBIT 6

TECHNICAL SPECIFICATIONS

INTERTEK TESTING SERVICES

6.0 **Technical Specifications**

For electronic filing, the block diagram of the tested EUT is saved with filename: block.pdf and circuit.pdf respectively.

INTERTEK TESTING SERVICES

EXHIBIT 7

INSTRUCTION MANUAL

INTERTEK TESTING SERVICES

7.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold / leased in the United States.

INTERTEK TESTING SERVICES

EXHIBIT 8

MISCELLANEOUS INFORMATION

INTERTEK TESTING SERVICES

8.0 **Miscellaneous Information**

This miscellaneous information includes emission measuring procedure.

8.1 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitter operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 – 2009.

The Transmitter equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emission at and above 30 MHz, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed.

The IF bandwidth used for measurement of radiated signal strength was 10 KHz for emission below 30 MHz and 120 KHz for emission from 30 MHz to 1000 MHz.

For radiated emission, the frequency range scanned is 9KHz to 1GHz. For line conducted emissions, the range scanned is 150 KHz to 30 MHz.

INTERTEK TESTING SERVICES

EXHIBIT 9

TEST EQUIPMENT LIST

INTERTEK TESTING SERVICES

9.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-03	BiConiLog Antenna	ETS	3142C	00066460	28-Jun-14	28-Jun-15
SZ185-01	EMI Receiver	R&S	ESCI	100547	10-Mar-14	10-Mar-15
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	29-Apr-14	29-Apr-15
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	19-Apr-14	19-Apr-15
SZ062-06	RF Cable	RADIAL	0.04-26.5GHz	083388	1-Nov-13	1-Nov-14
SZ062-22	RF Cable	HUBER+SUHNER	SF104PE	MY1913/4PE	11-Nov-13	11-Nov-14
SZ062-23	RF Cable	HUBER+SUHNER	SF104PE	MY4262/4PE	11-Nov-13	11-Nov-14
SZ062-26	RF Cable	HUBER+SUHNER	SF104PE	MY4556/4PE	14-Jan-14	14-Jan-15
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	21-May-14	21-May-15
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	9-Nov-13	9-Nov-14
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	9-Nov-13	9-Nov-14
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	16-Jun-14	16-Jun-15
SZ188-03	Shielding Room	ETS	RFD-100	4100	23-Aug-13	23-Aug-14