

ANNEX A

TEST RESULTS

Report No: 19950RET.101

Report No:
19950RET.101

Date: 2004-08-26

Page: 1 of 52

Annex A

INDEX

	Page
TEST CONDITIONS	3
Section 15.247 Subclause (a) (1). 20 dB Bandwidth and Carrier frequency separation	5
Section 15.247 Subclause (a) (1) (iii). Number of hopping channels	10
Section 15.247 Subclause (a) (1) (iii). Time of occupancy (Dwell Time).....	12
Section 15.247 Subclause (b). Maximum peak output power and antenna gain	16
Section 15.247 Subclause (c). Band-edge of conducted emissions (Transmitter).....	23
Section 15.247 Subclause (c). Emission limitations conducted (Transmitter).....	27
Section 15.247 Subclause (c). Emission limitations radiated (Transmitter)	30
Section 15.109. Receiver spurious radiation	43

Report No:
19950RET.101

Date: 2004-08-26

Page: 2 of 52

Annex A

TEST CONDITIONS

Power supply (V):

$$V_{\text{nominal}} = 3.7 \text{ Vdc}$$

Type of power supply = DC Voltage from rechargeable battery

Type of antenna = Integral antenna

Maximum Declared Gain for antenna= 0 dB

Operating Temperature Range (°C):

$$T_n = -15 \text{ to } +55$$

TEST FREQUENCIES:

Lowest channel: 2402 MHz

Middle channel: 2441 MHz

Highest channel: 2480 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.4-1992.

CONDUCTED MEASUREMENTS

The equipment under test was set up in a shielded room and it is directly connected to the spectrum analyser via the antenna connector (sma type) provided with the test sample. No coaxial low-loss connecting cable was necessary for such connection so no cable attenuation correction was made.

RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 3 m for the frequency range 30 MHz-1000 MHz (30 MHz-1000 MHz Bilog antenna) and at a distance of 1m for the frequency range 1 GHz-25 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).

For radiated emissions in the range 1 GHz-25 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

Report No: 19950RET.101		Page: 3 of 52
Date: 2004-08-26		Annex A

The equipment under test was set up on a non-conductive (wooden) platform one meter above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

Report No: 19950RET.101		Page: 4 of 52
Date: 2004-08-26		Annex A

Section 15.247 Subclause (a) (1). 20 dB Bandwidth and Carrier frequency separation

SPECIFICATION

Frequency hopping system shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

RESULTS

20 dB Bandwidth (see next 3 plots).

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
20 dB Spectrum bandwidth (kHz)	961.92	793.59	881.76
Measurement uncertainty (kHz)	±11		


Report No:
19950RET.101

Date: 2004-08-26


Page: 5 of 52

Annex A

20 dB BANDWIDTH.
Lowest Channel: 2402 MHz.

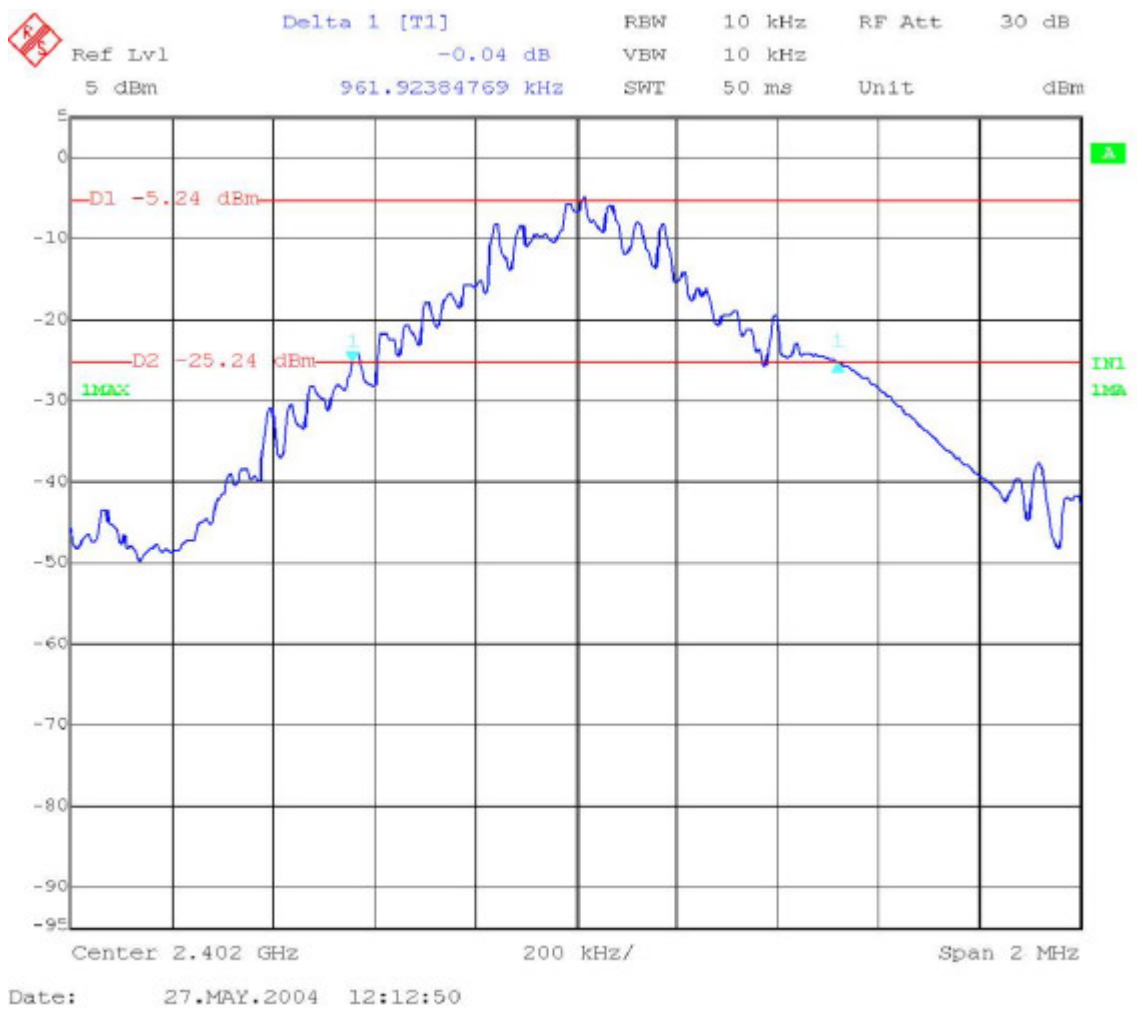

20 dB BANDWIDTH.
Middle Channel: 2441 MHz.

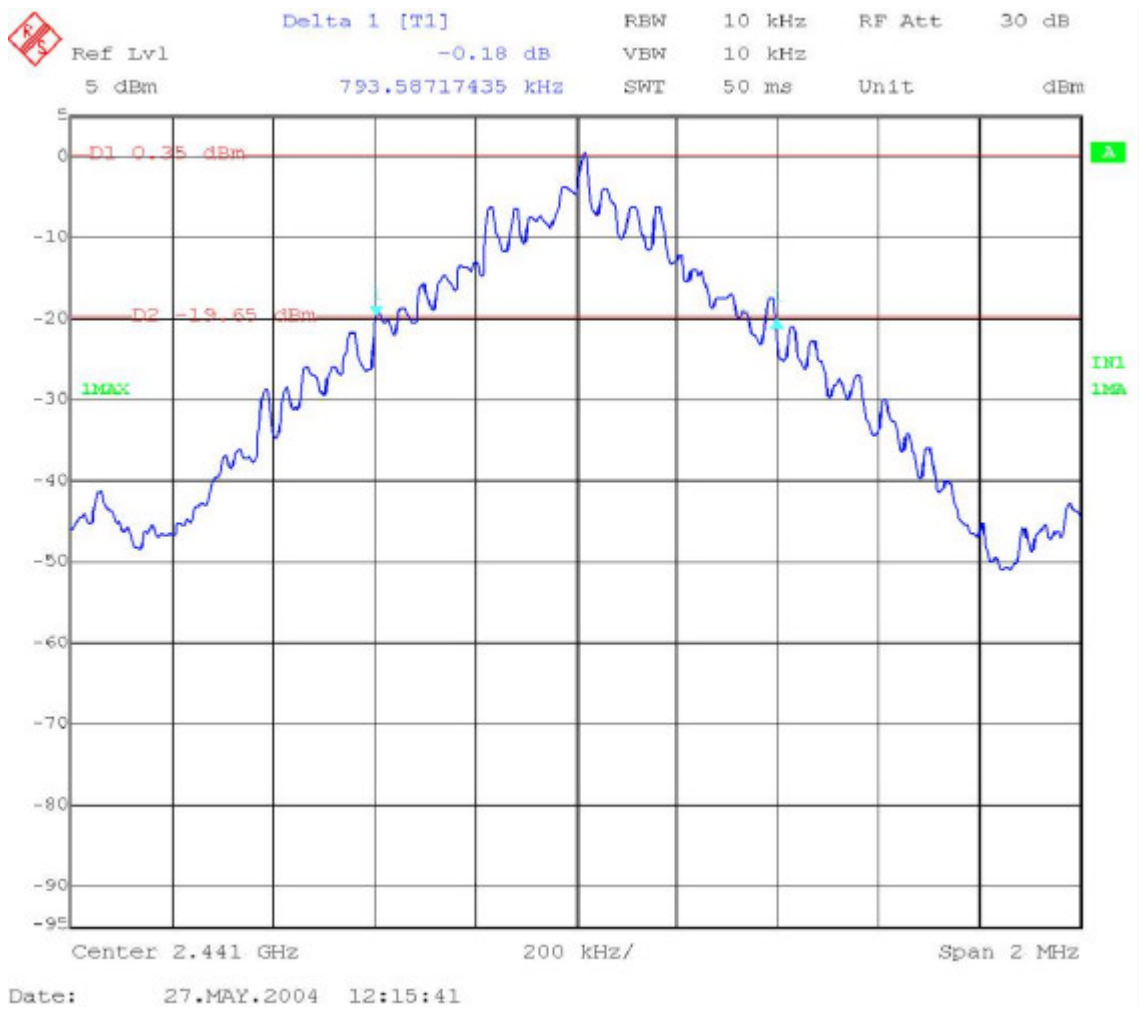

Report No:
19950RET.101


Date: 2004-08-26

FET45_00.DOC

Page: 7 of 52

Annex A

20 dB BANDWIDTH.
Highest Channel: 2480 MHz.

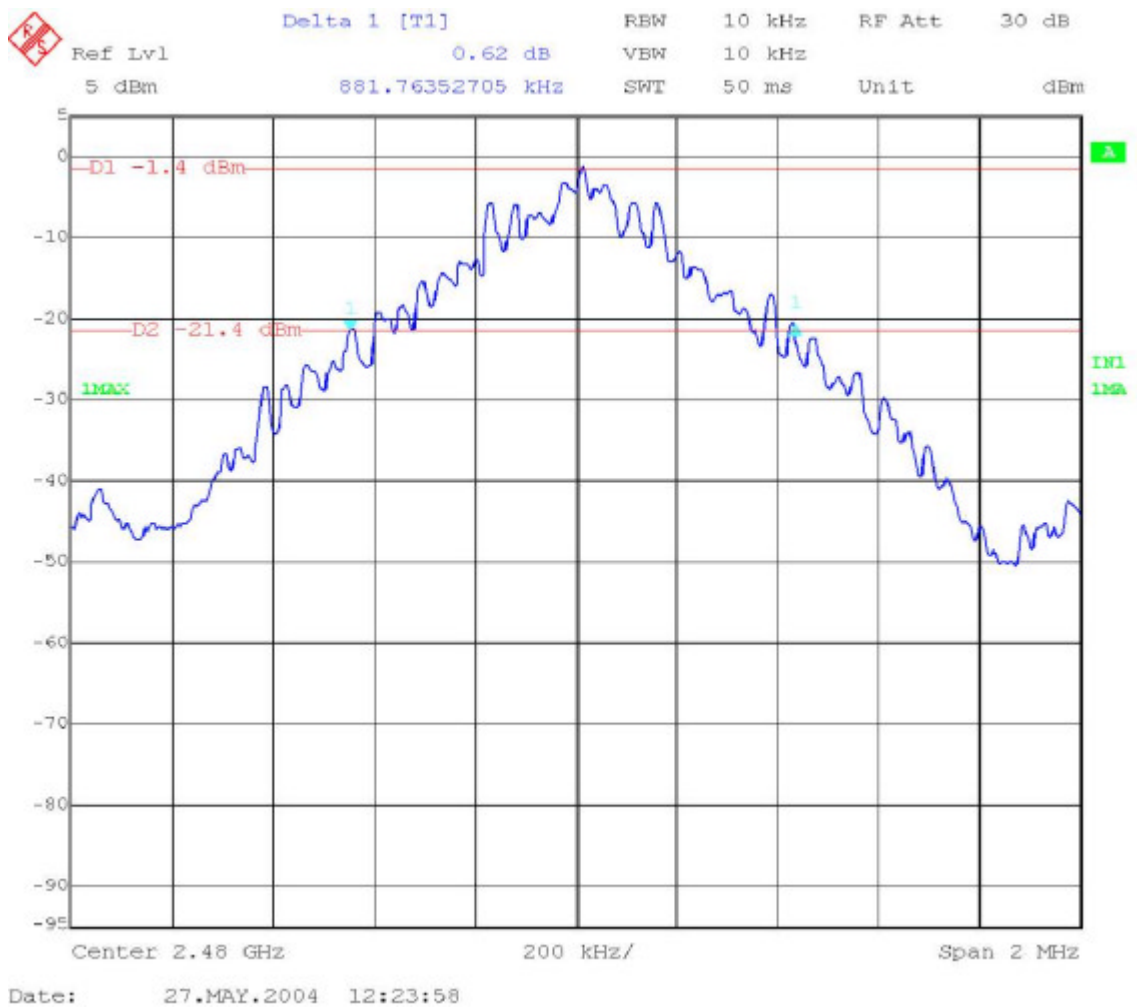

Report No:
19950RET.101


Date: 2004-08-26

FET45_00.DOC

Page: 8 of 52

Annex A

Carrier frequency separation (see next plot).

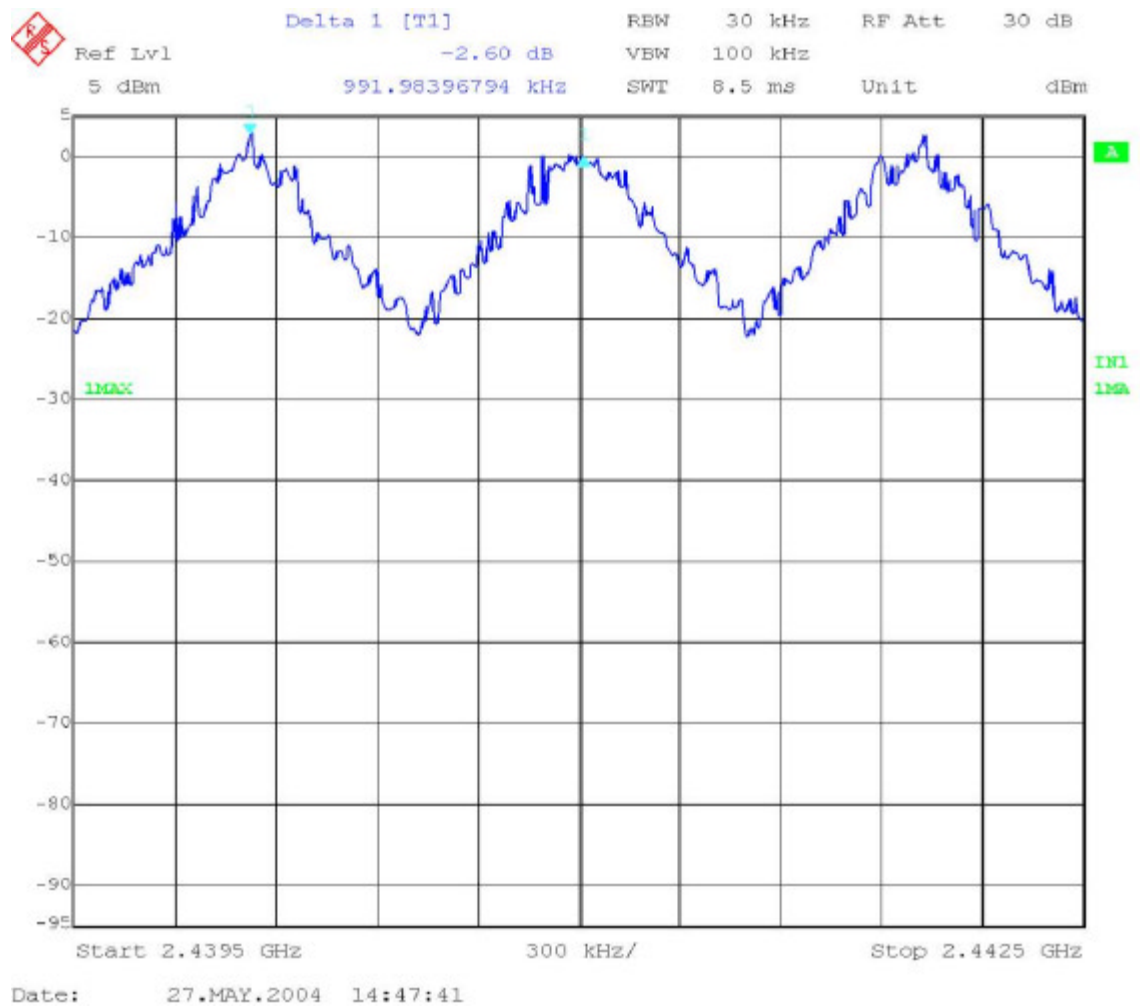

The hopping channel carrier frequencies are separated by a minimum of the 20 dB bandwidth of the hopping channel.

Verdict: PASS


Section 15.247 Subclause (a) (1) (iii). Number of hopping channels

SPECIFICATION

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels.

RESULTS

The number of hopping channels is 79 (see next two plots).

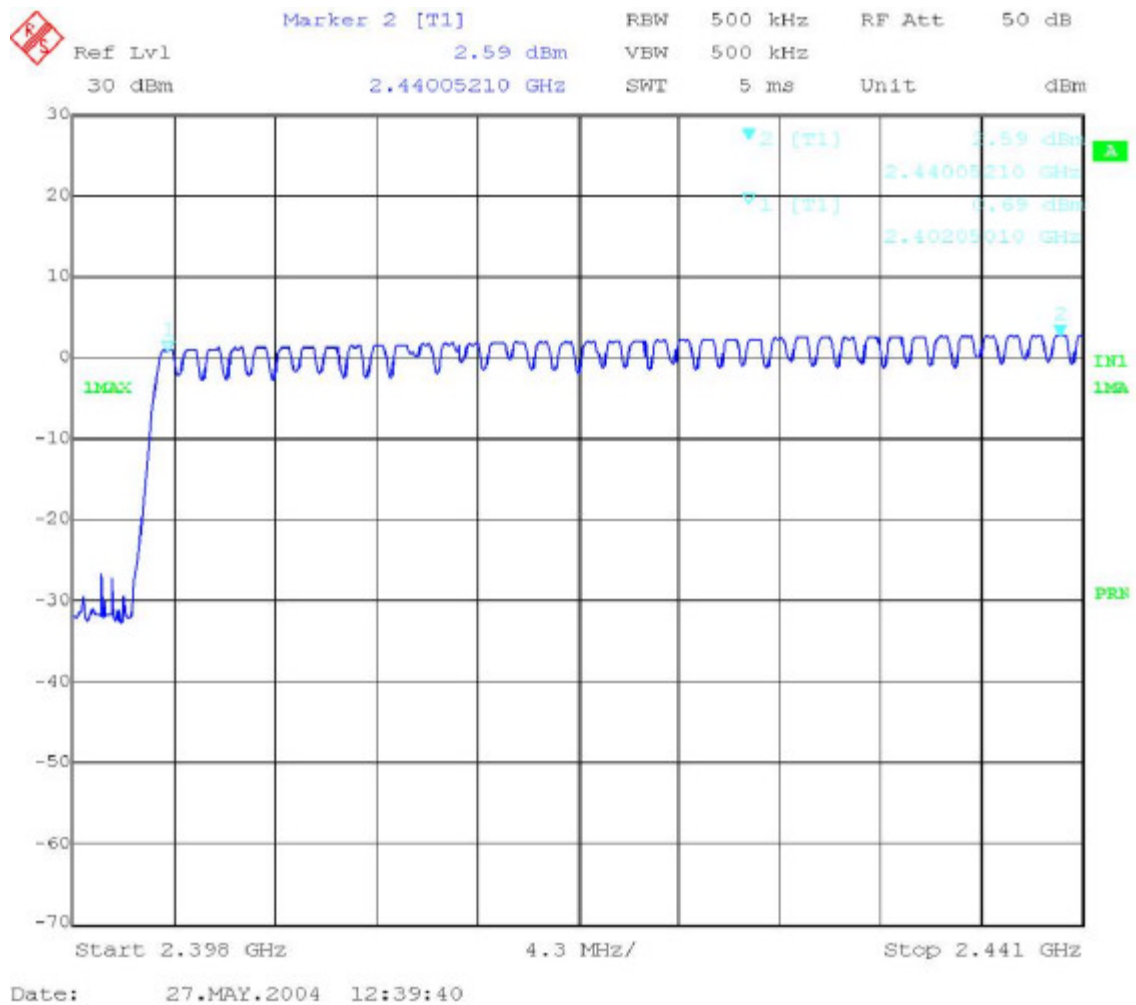


Number of hopping frequencies: 39

Report No:
19950RET.101

Date: 2004-08-26

Page: 10 of 52

Annex A

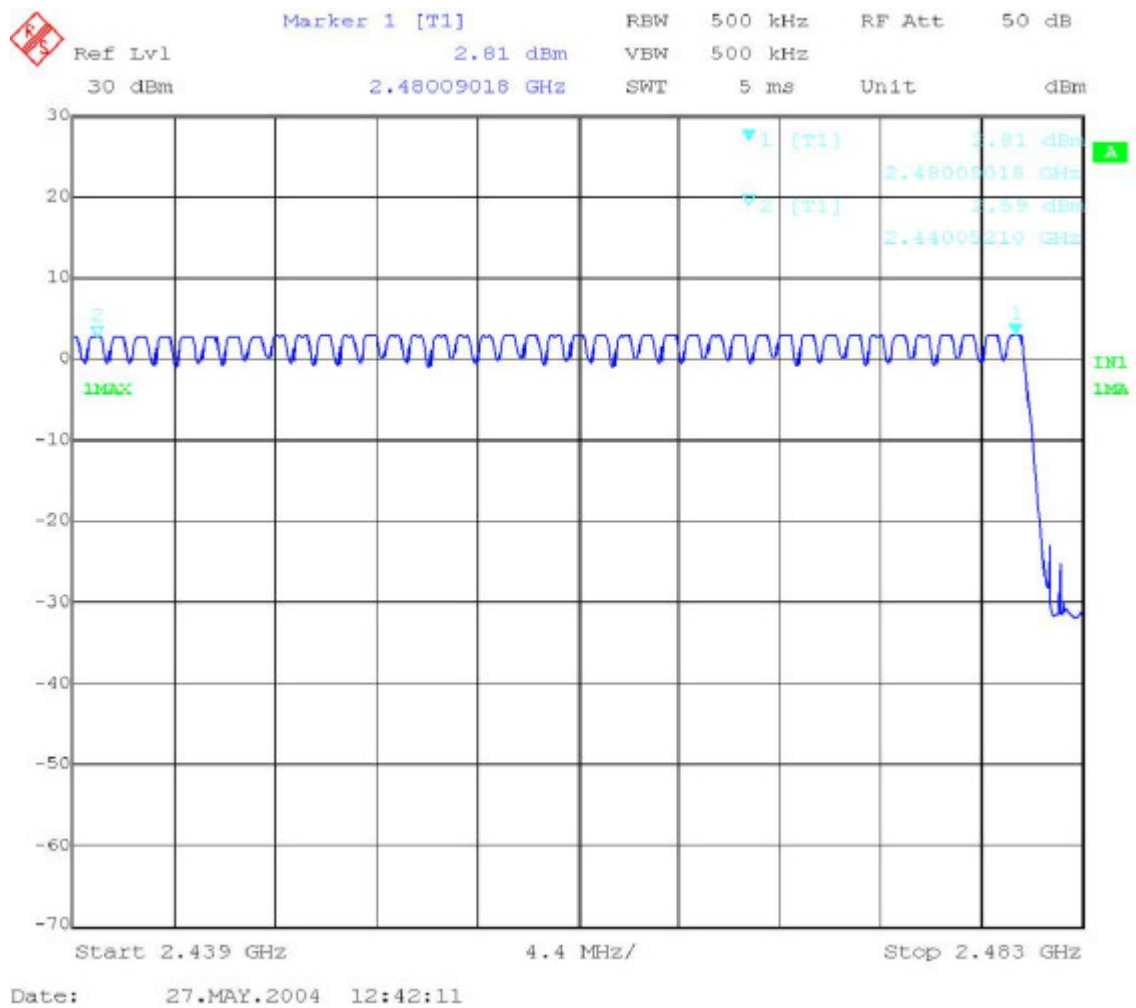

Number of hopping frequencies: 40

Total number of hopping frequencies: 79

Verdict: PASS

Report No:
19950RET.101

Date: 2004-08-26

Page: 11 of 52

Annex A

Section 15.247 Subclause (a) (1) (iii). Time of occupancy (Dwell Time)

SPECIFICATION

The average time of occupancy on any channel shall not be greater than 0.4 seconds (400 ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed = $0.4 \times 79 = 31.6$ seconds.

RESULTS

The equipment only supports 1 slot packet (DH1).


1. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH1.

The system makes worst case 1600 hops per second or 1 time slot has a length of $625\mu\text{s}$ with 79

channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/2 = 800$ hops per second with 79 channels. So you have each channel $800/79 = 10.13$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $10.13 \times 31.6 = 320.11$ times of appearance .

Each Tx-time per appearance is $444.9\mu\text{s}$ (see next plot).

So we have $320.11 \times 444.9\mu\text{s} = 142.42\text{ ms}$ per 31.6 seconds.

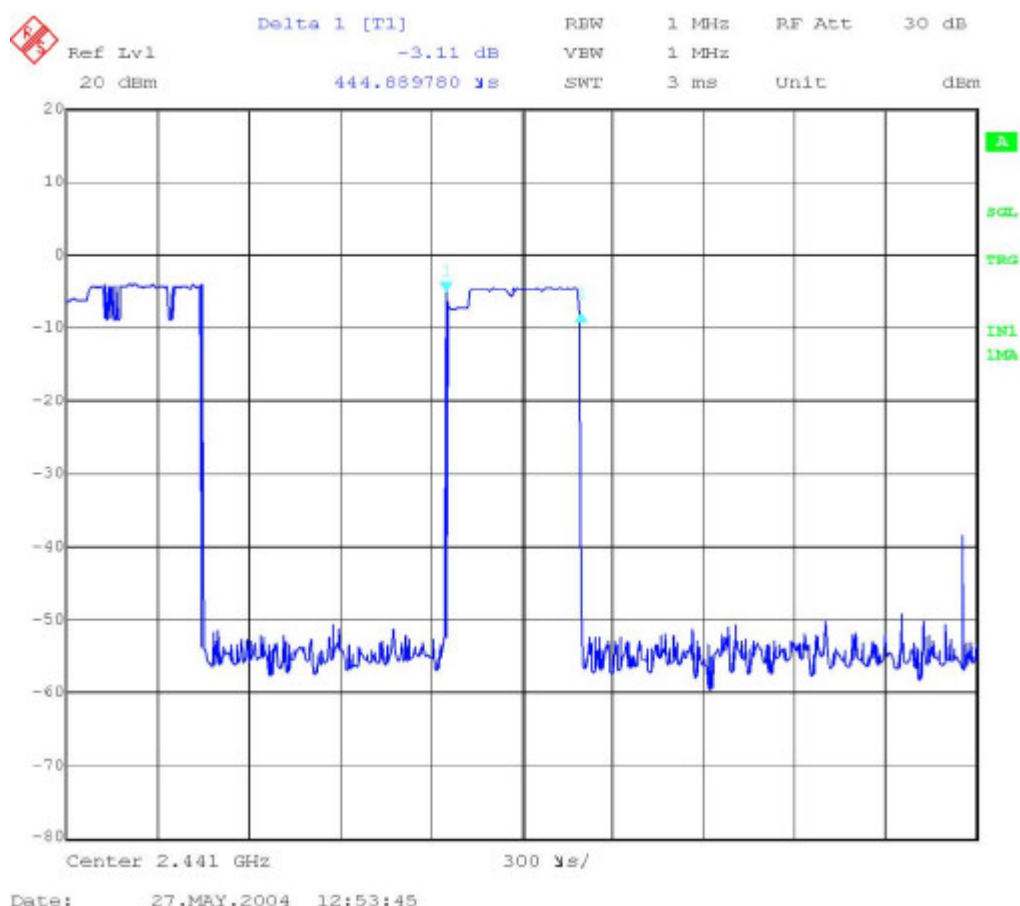

Report No:
19950RET.101

Date: 2004-08-26

Page: 12 of 52

Annex A

Verdict: PASS


Report No: 19950RET.101		Page: 13 of 52
Date: 2004-08-26		Annex A

2. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH3.

A DH3 Packet need 3 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/4 = 400$ hops per second with 79 channels. So you have each channel $400/79 = 5.1$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $5.1 \times 31.6 = 161.16$ times of appearance .

Each Tx-time per appearance is 1.69 ms (see next plot).

So we have $161.16 \times 1.69 \text{ ms} = 272.36 \text{ ms}$ per 31.6 seconds.

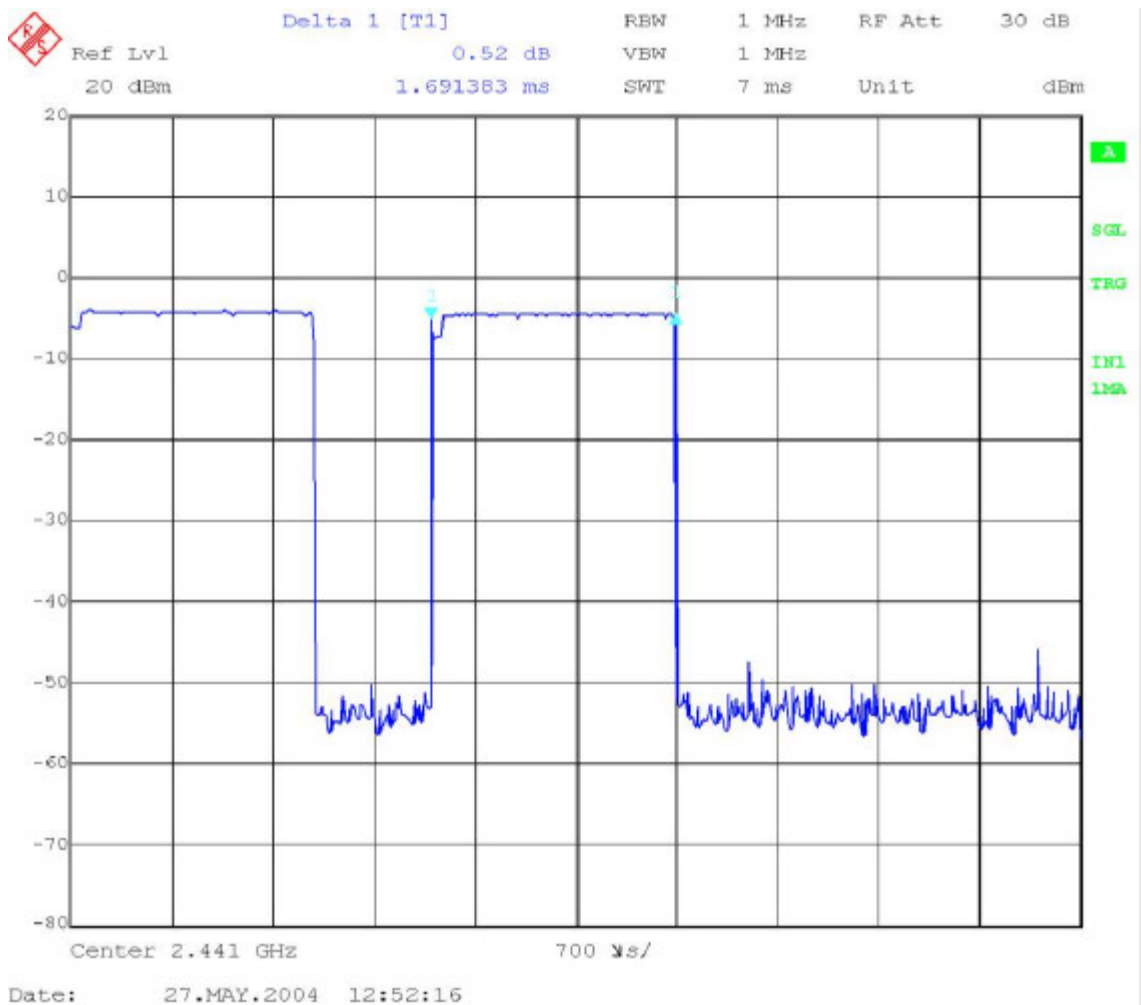


Verdict: PASS

3. TIME OF OCCUPANCY (DWELL TIME) FOR PACKET TYPE DH5.

A DH5 Packet need 5 time slots for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/6 = 266.67$ hops per second with 79 channels. So you have each channel $266.67/79 = 3.37$ times per second and so for a period of $0.4 \times 79 = 31.6$ seconds you have $3.37 \times 31.6 = 106.49$ times of appearance .

Each Tx-time per appearance is 2.93 ms (see next plot).

So we have $106.49 \times 2.93 \text{ ms} = 312.02 \text{ ms}$ per 31.6 seconds.

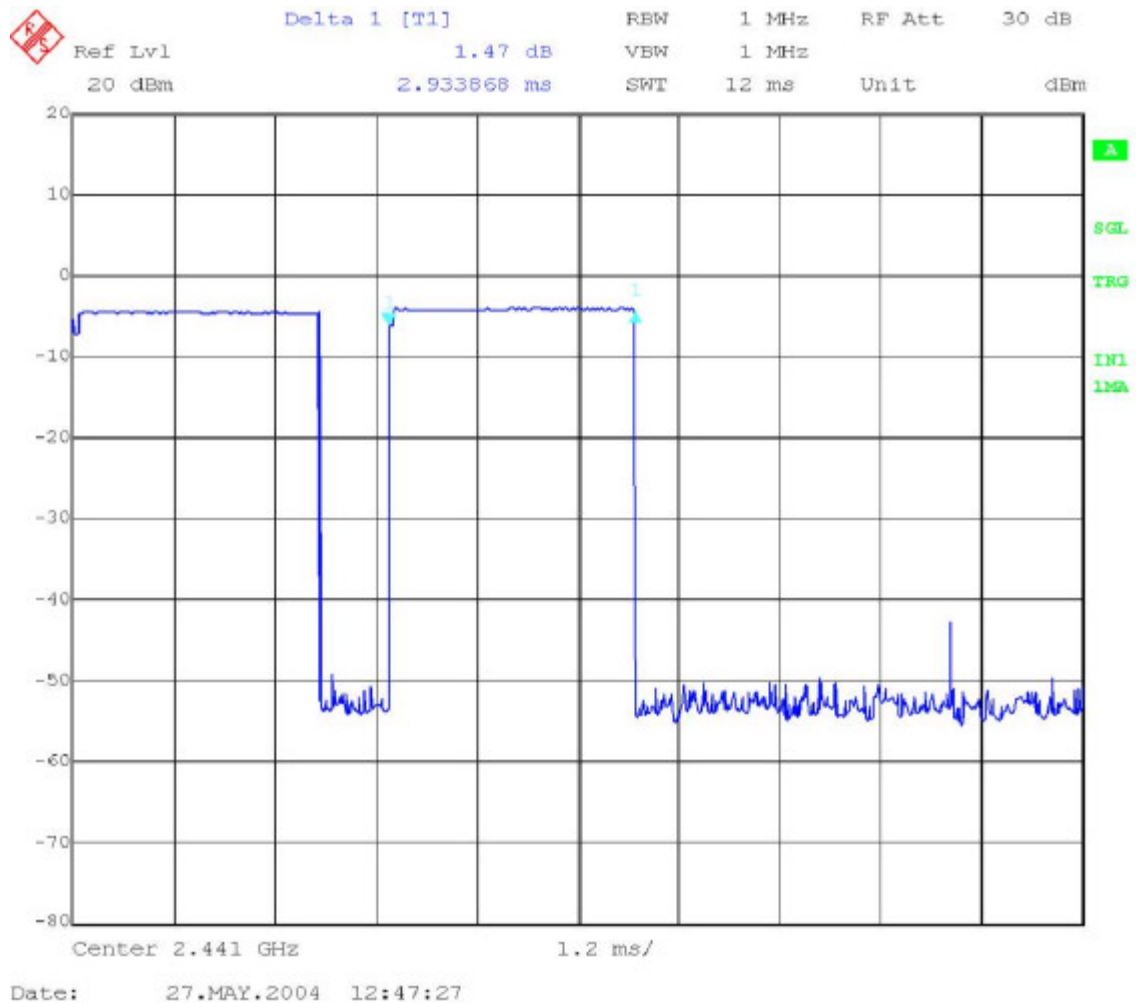

Verdict: PASS

Section 15.247 Subclause (b). Maximum peak output power and antenna gain

SPECIFICATION

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt (30 dBm).

RESULTS

MAXIMUM PEAK OUTPUT POWER (CONDUCTED). See next plots.

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Maximum peak power (dBm)	0.76	2.67	3.03
Measurement uncertainty (dB)	±1.5		

The maximum declared antenna gain for this device is 0 dBi, therefore the maximum theoretical peak radiated power (EIRP) in the three measurement channels for this device is 3.03 dBm or 2.01 mW.

The actual peak radiated power (EIRP) was measured for the lowest, middle and highest frequency (see next plots):

MAXIMUM PEAK OUTPUT POWER (RADIATED).

	Lowest frequency 2402 MHz	Middle frequency 2441 MHz	Highest frequency 2480 MHz
Instrument reading (dBm)	-33.12	-33.81	-34.12
Correction Factor (dB)	34.96	35.10	35.24
Maximum EIRP peak power (dBm)	1.84	1.29	1.12
Measurement uncertainty (dB)	+1.98 / -1.75		

Declared peak gain: 0 dBi


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Verdict: PASS

Report No: 19950RET.101		Page: 16 of 52
Date: 2004-08-26		Annex A

PEAK OUTPUT POWER (CONDUCTED).

Lowest Channel: 2402 MHz.

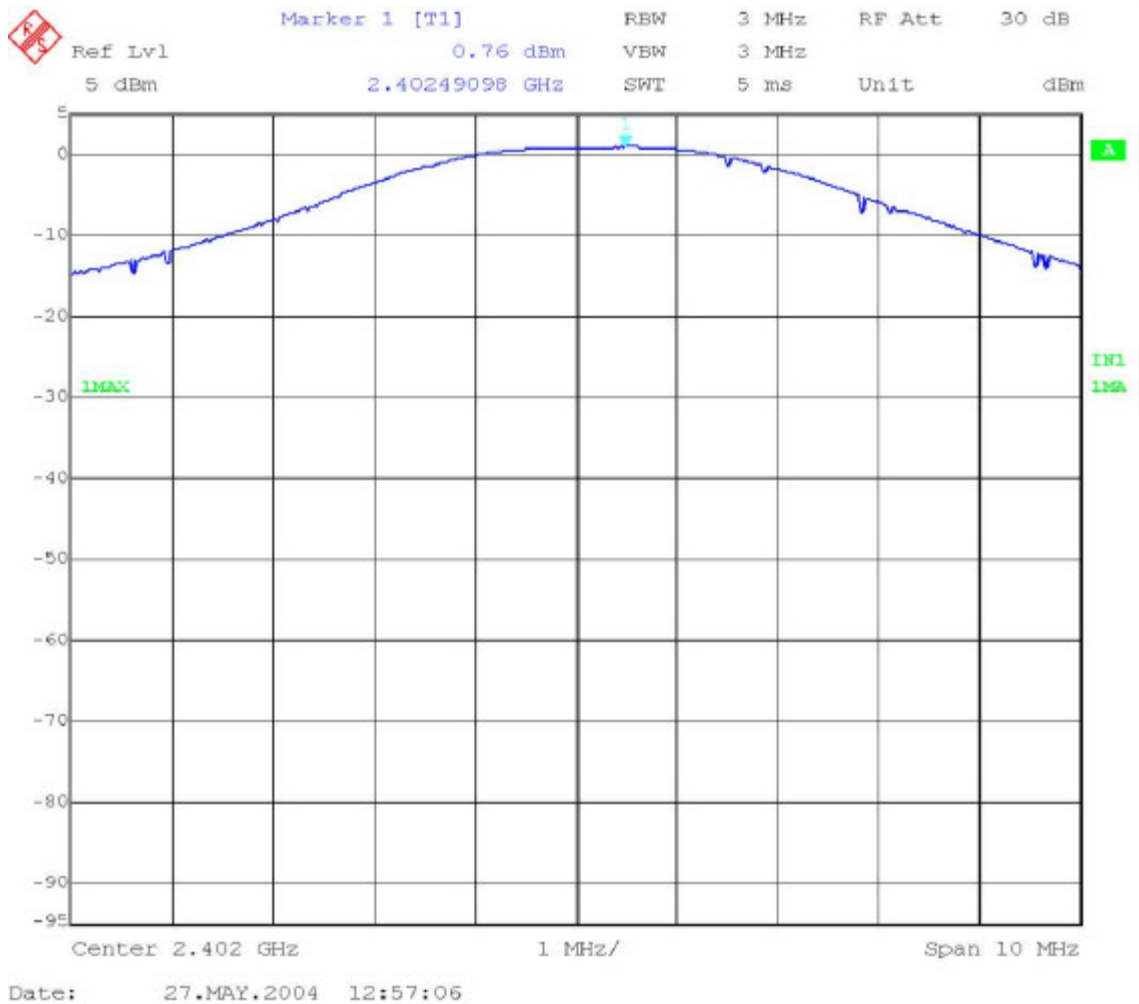

Report No:
19950RET.101

Date: 2004-08-26

FET45_00.DOC

Page: 17 of 52

Annex A