


Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 3.05 dBm VBW 1 MHz
20 dBm 2.40183868 GHz SWT 5 ms Unit dBm

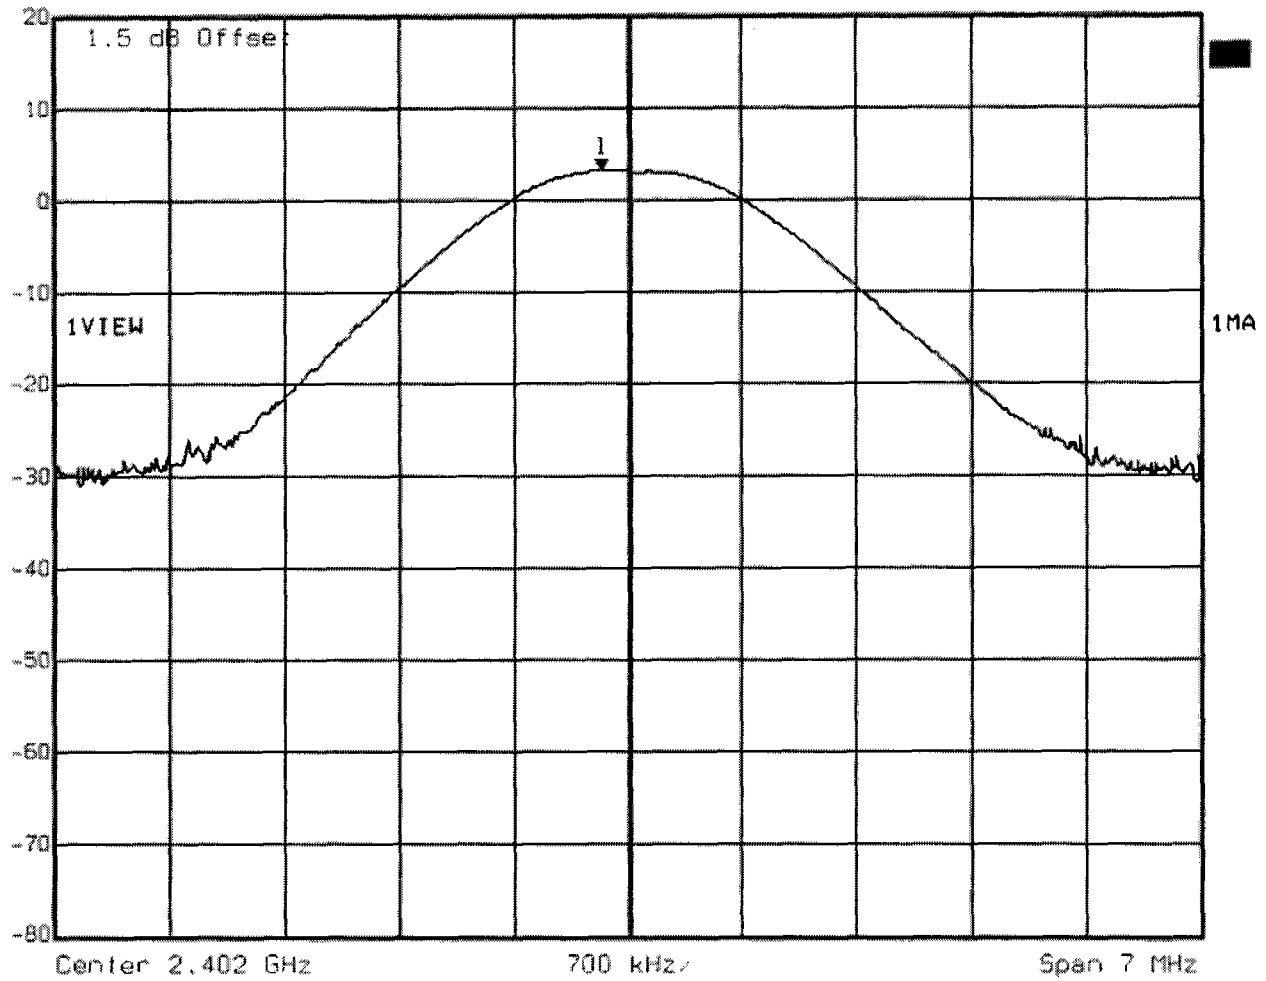

Title: Peak Output Power conducted Ch.: 0
Comment A: Nokia HS-37W
Date: 23.FEB.2005 14:25:15




Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 2.80 dBm VBW 1 MHz
20 dBm 2.44083868 GHz SWT 5 ms Unit dBm

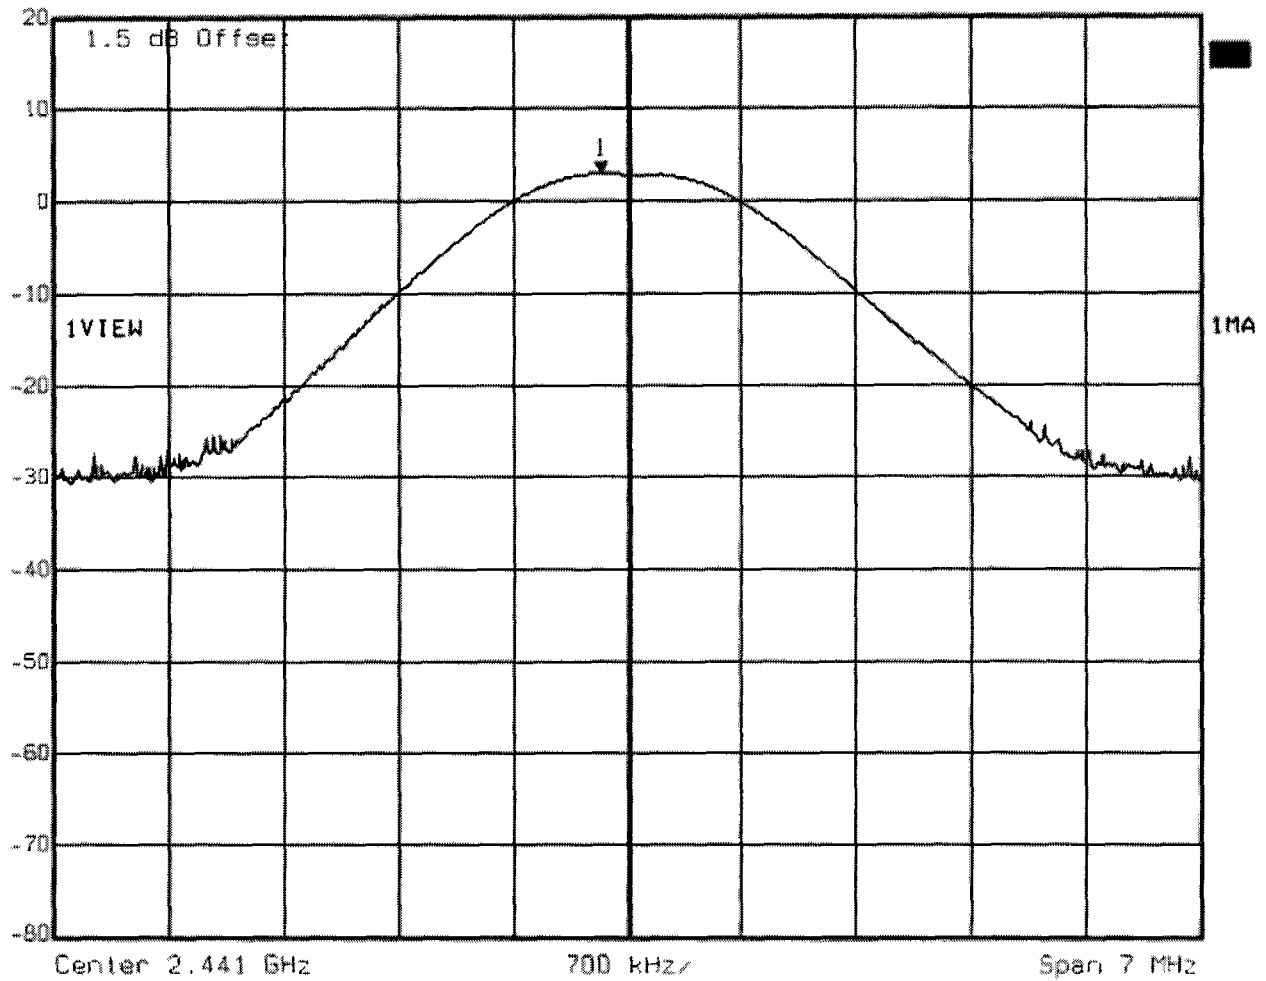

Title: Peak Output Power conducted Ch.: 39
Comment A: Nokia HS-37W
Date: 23.FEB.2005 14:24:29




Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 2.61 dBm VBW 1 MHz
20 dBm 2.48010521 GHz SWT 5 ms Unit dBm

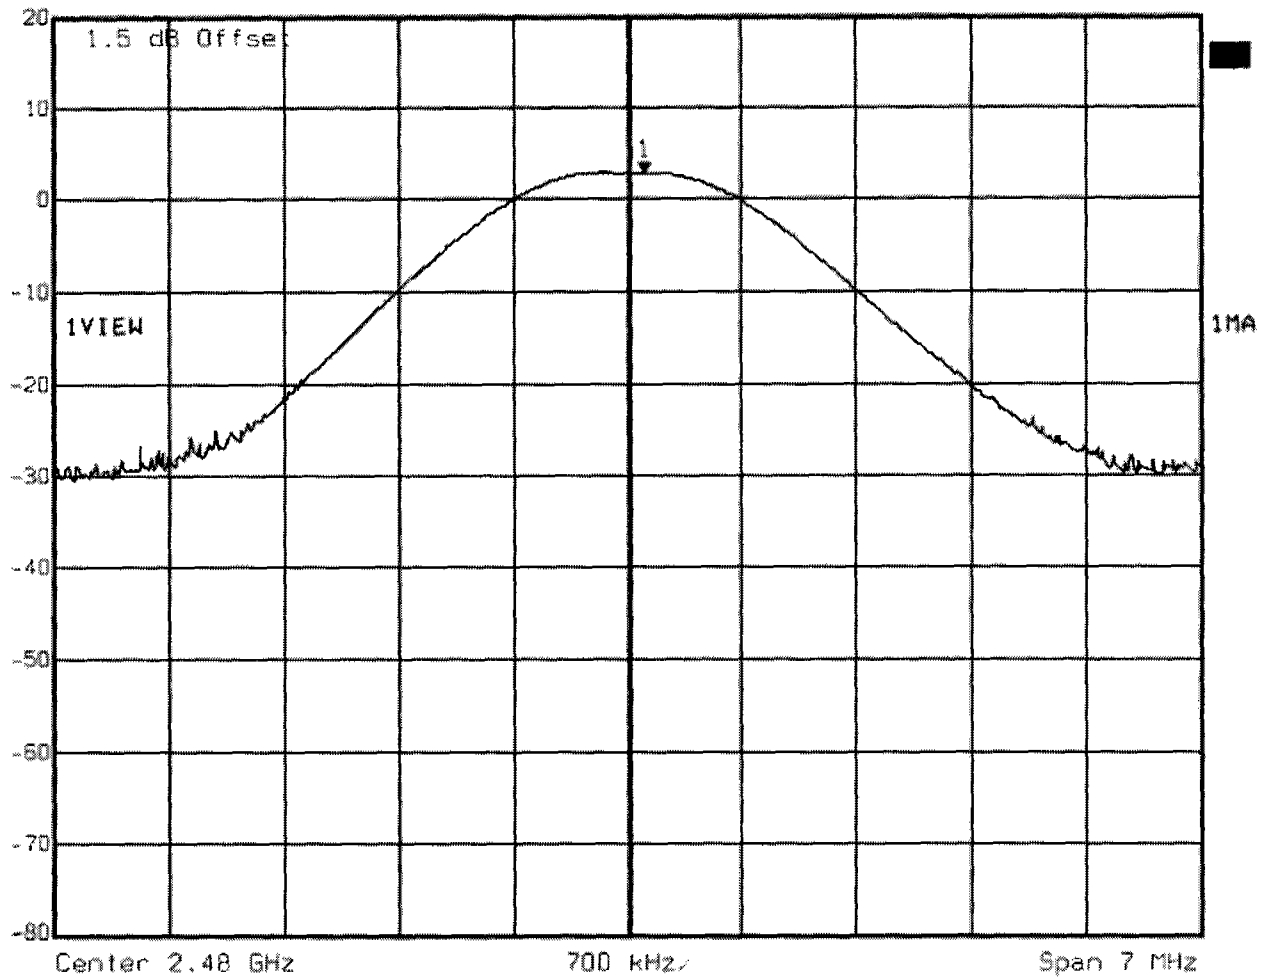

Title: Peak Output Power conducted Ch.: 78
Comment A: Nokia HS-37W
Date: 23.FEB.2005 14:23:37

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.441GHz, Pmax: 3.58dBm, RBW: 5MHz

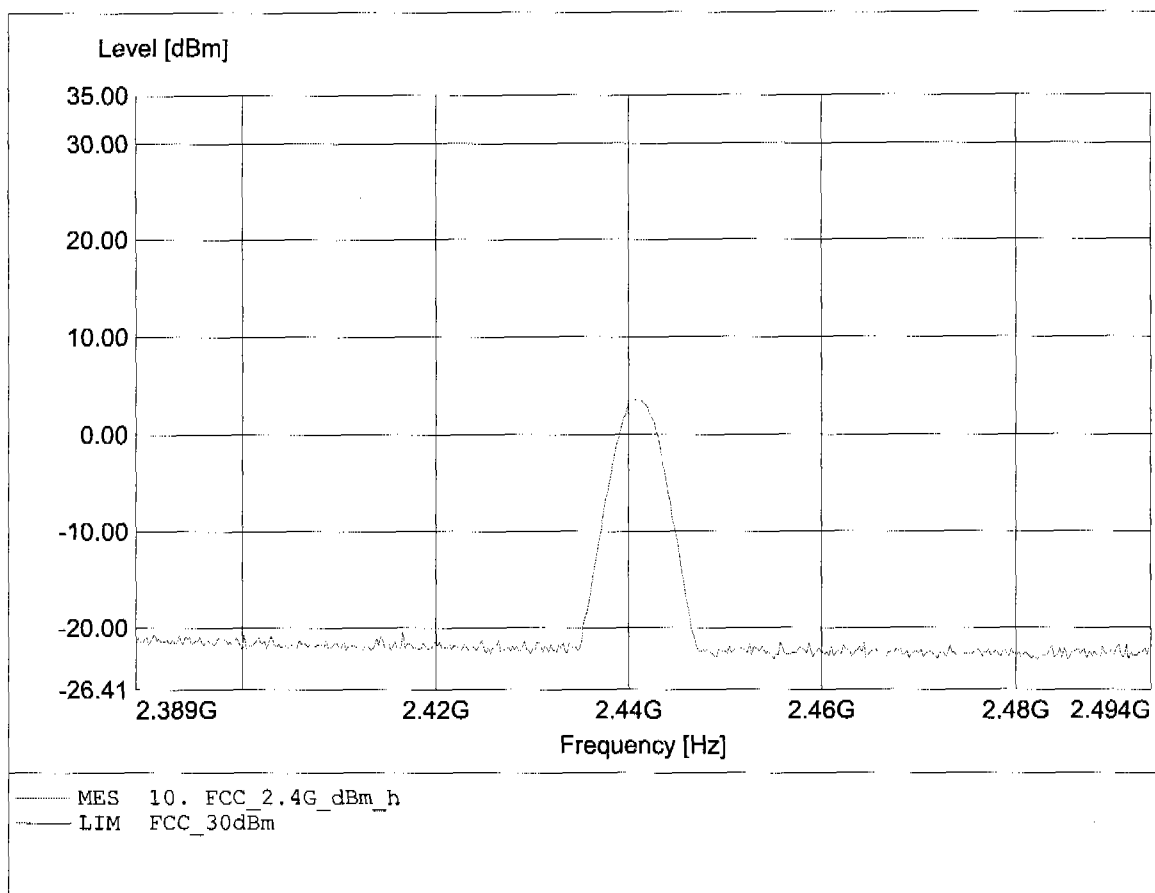


Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.441GHz, Emax: 99.52dBµV/m, RBW: 100kHz

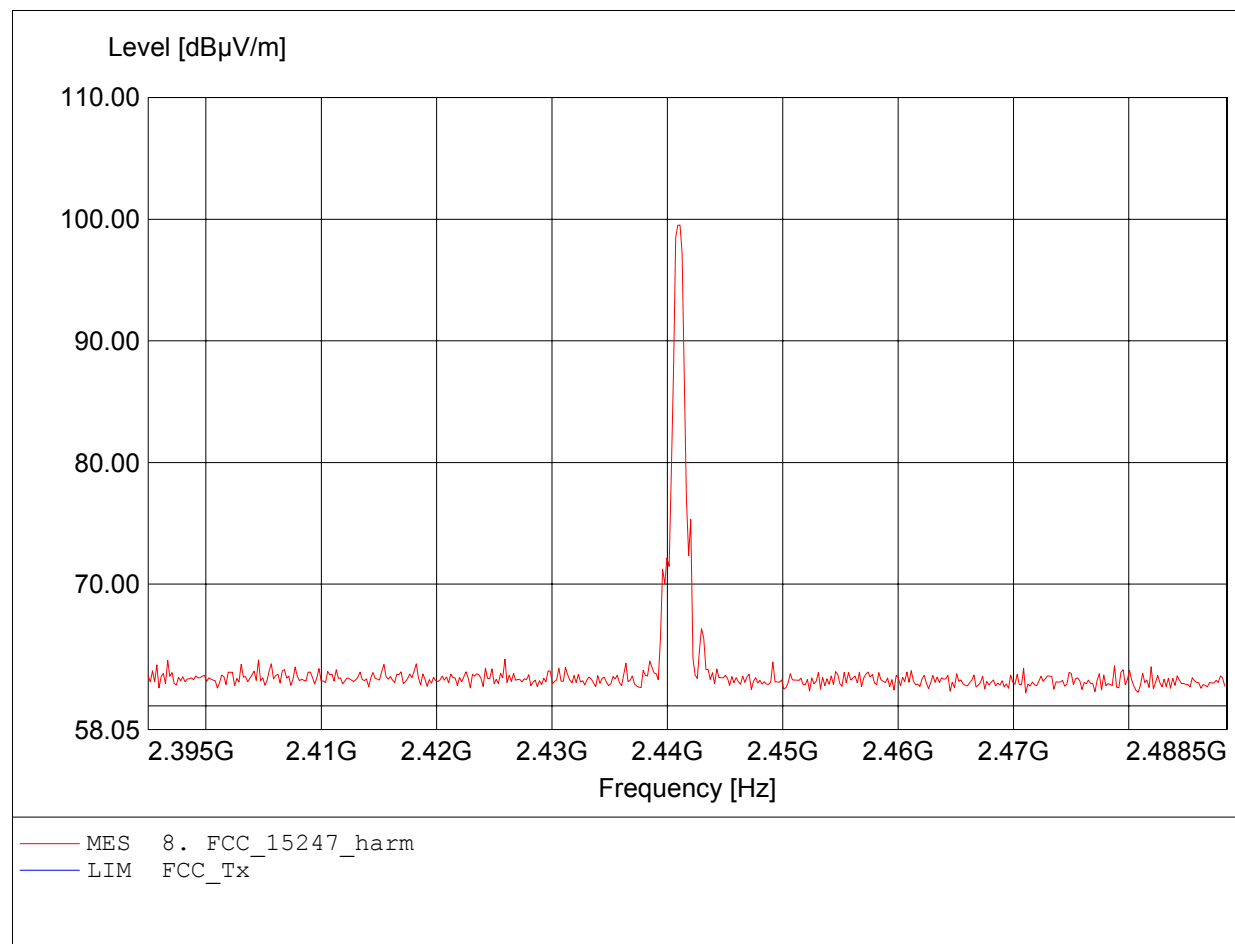


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.253MHz, Emax: 32.15dBµV/m, RBW: 100kHz

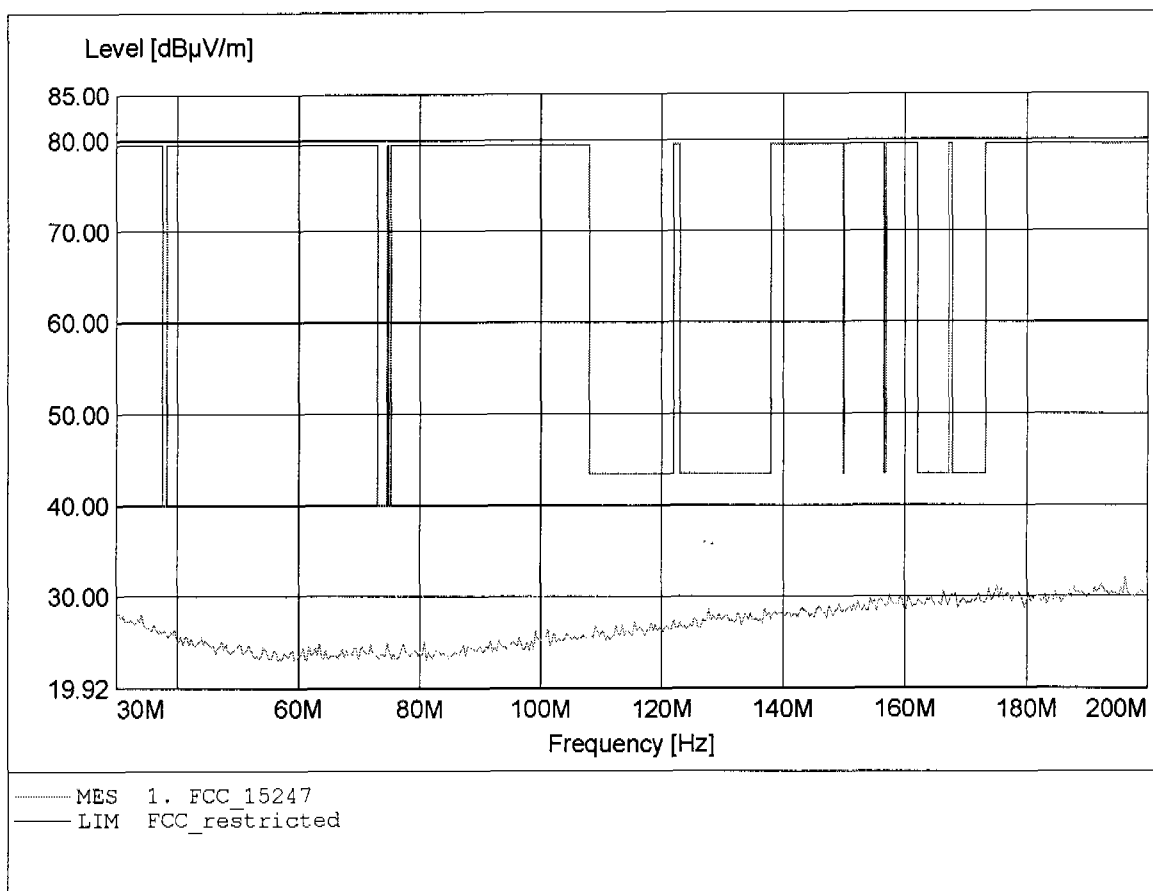


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.253MHz, Emax: 31.49dBµV/m, RBW: 100kHz

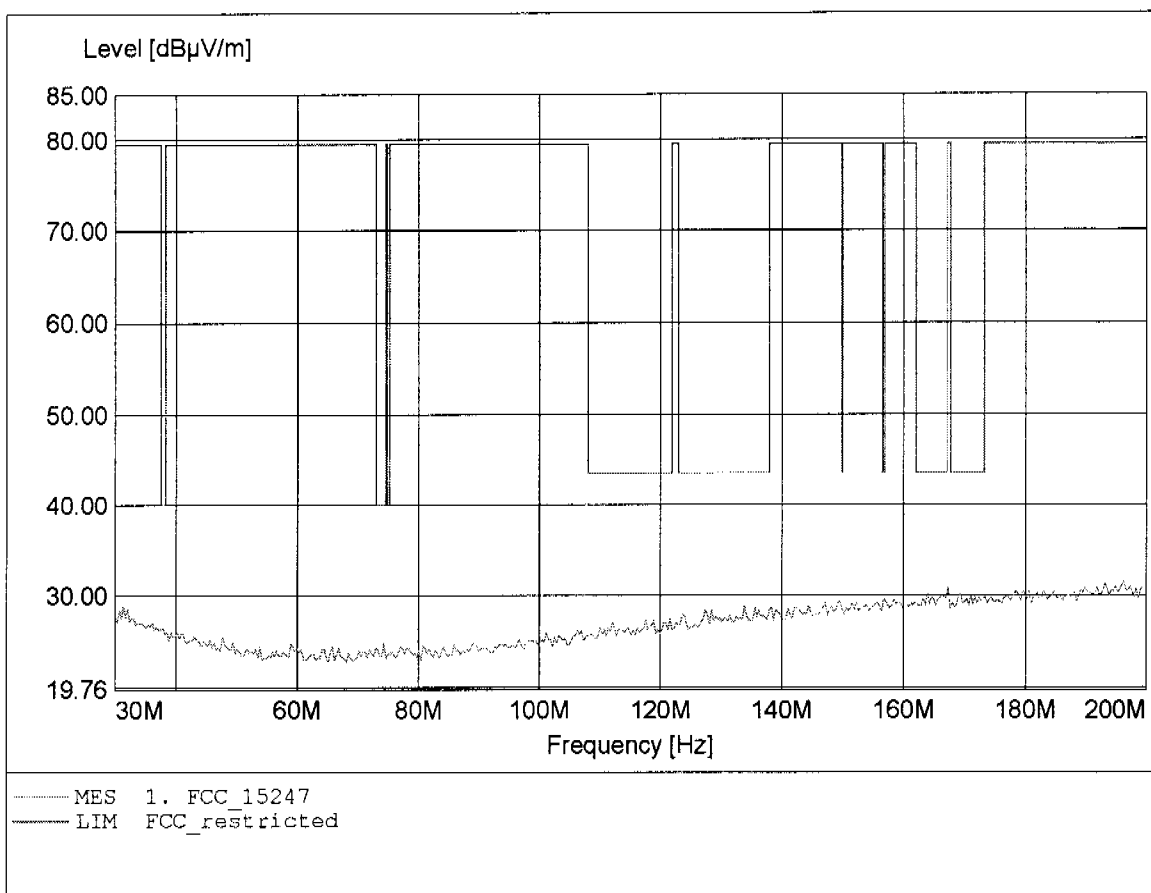


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 977.555MHz, Emax: 22.96dBµV/m, RBW: 100kHz

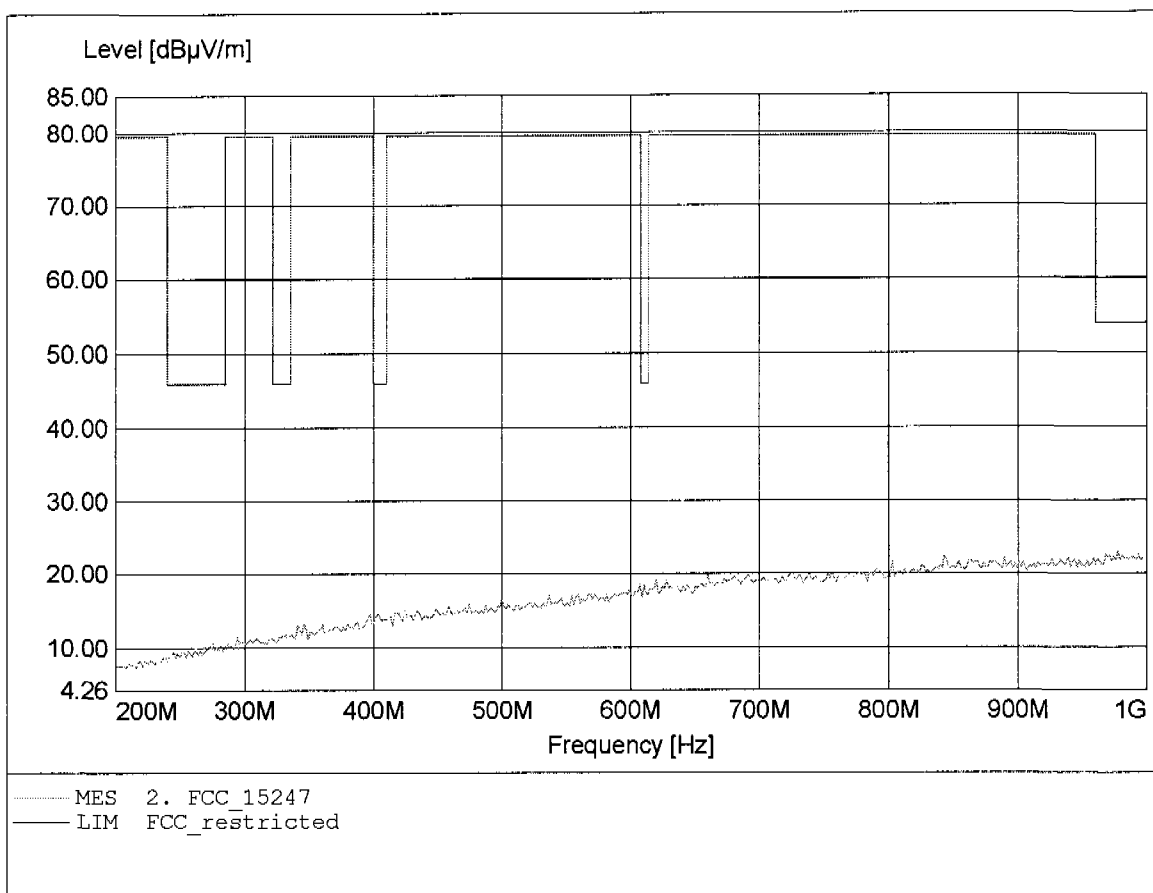


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 983.968MHz, Emax: 23.02dBµV/m, RBW: 100kHz

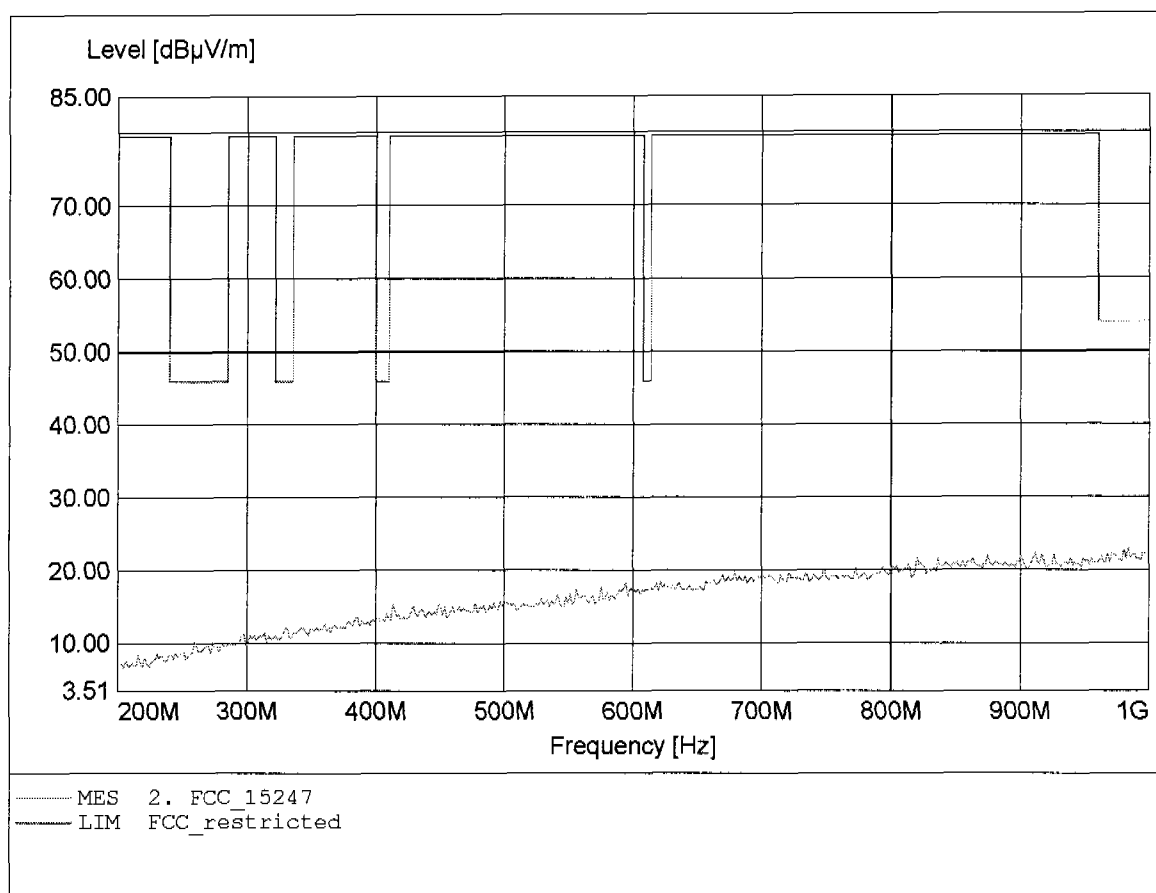


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.400GHz, Emax: 76.83dBμV/m, RBW: 1MHz

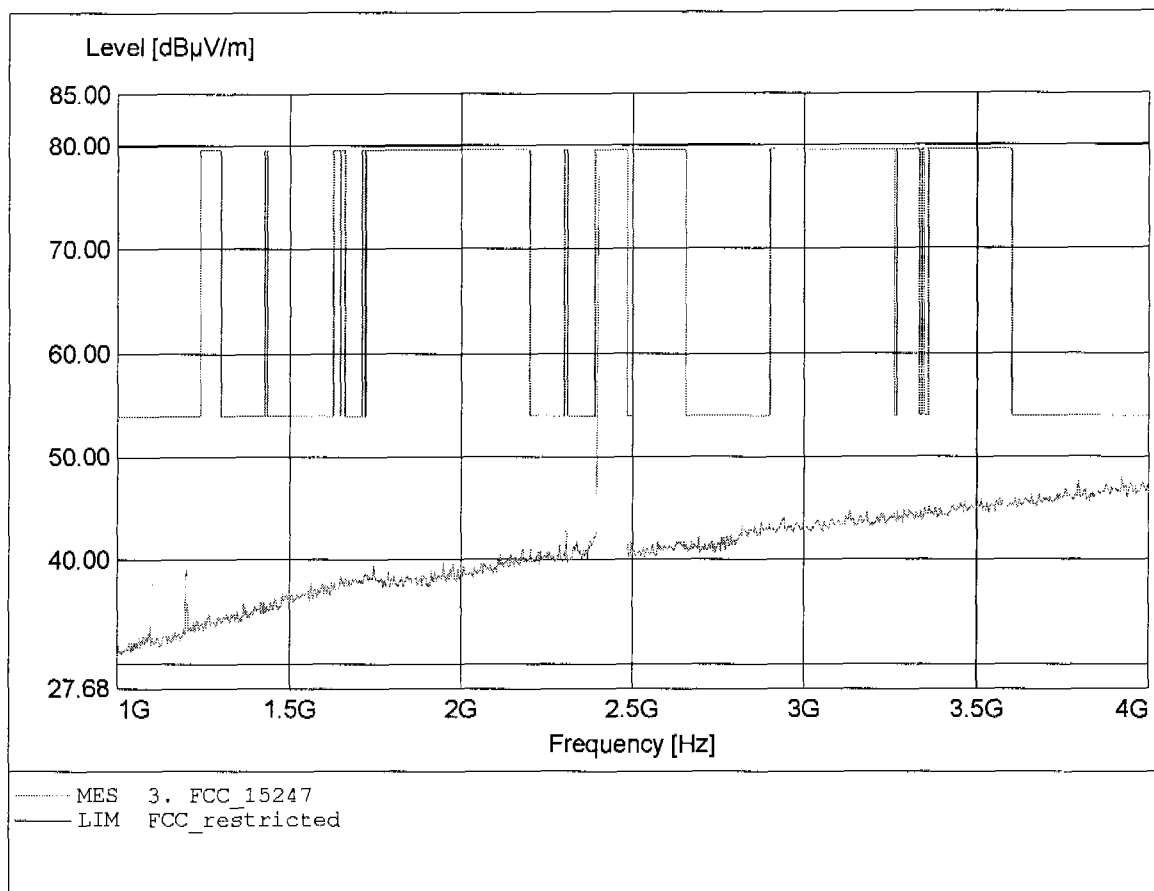


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.400GHz, Emax: 76.83dBμV/m, RBW: 1MHz

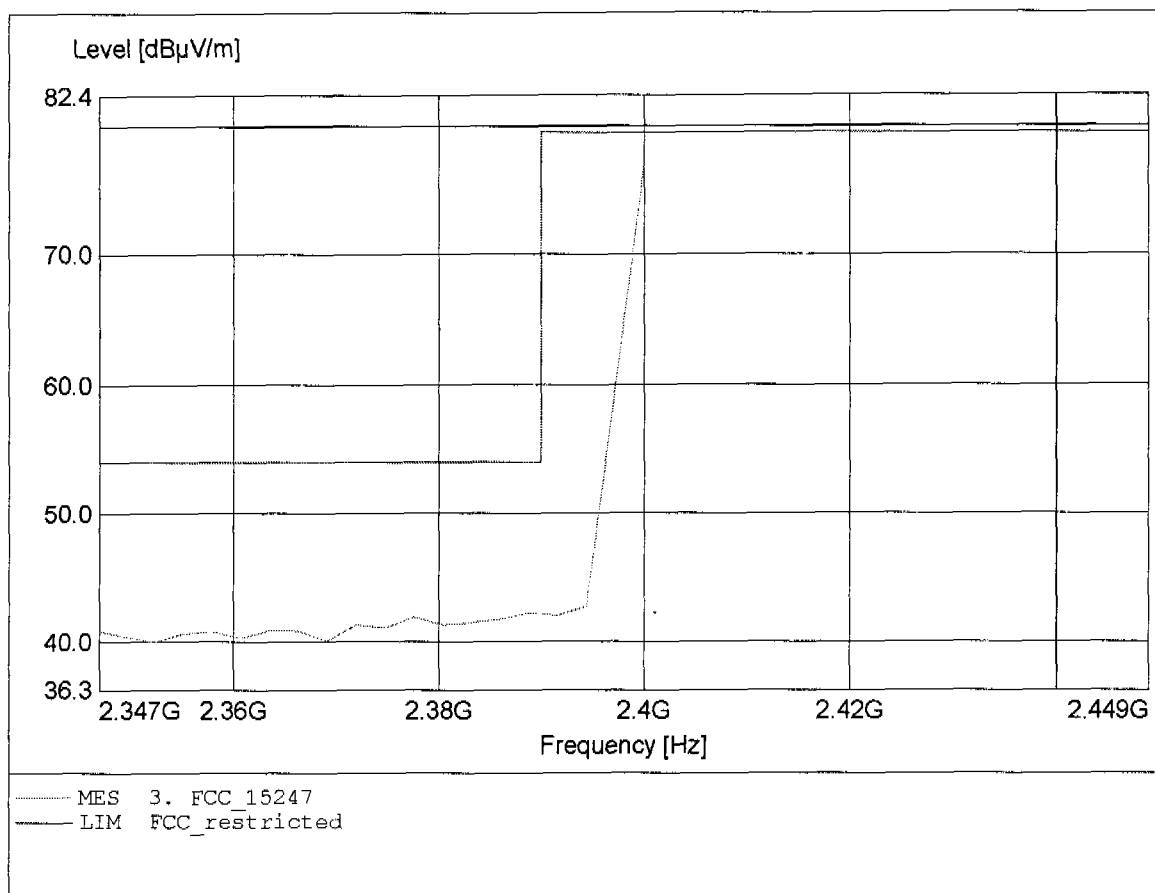


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.400GHz, Emax: 72.49dBµV/m, RBW: 1MHz

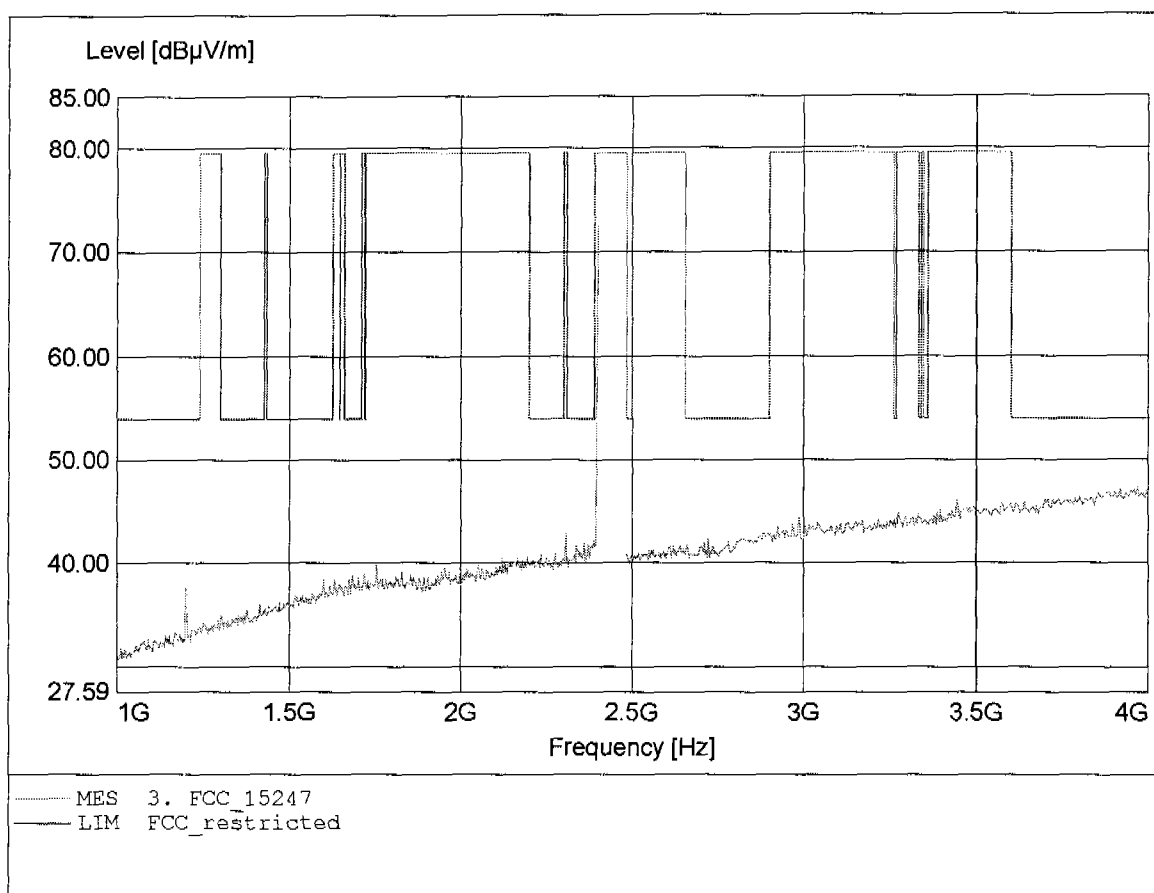


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.400GHz, Emax: 72.49dBµV/m, RBW: 1MHz

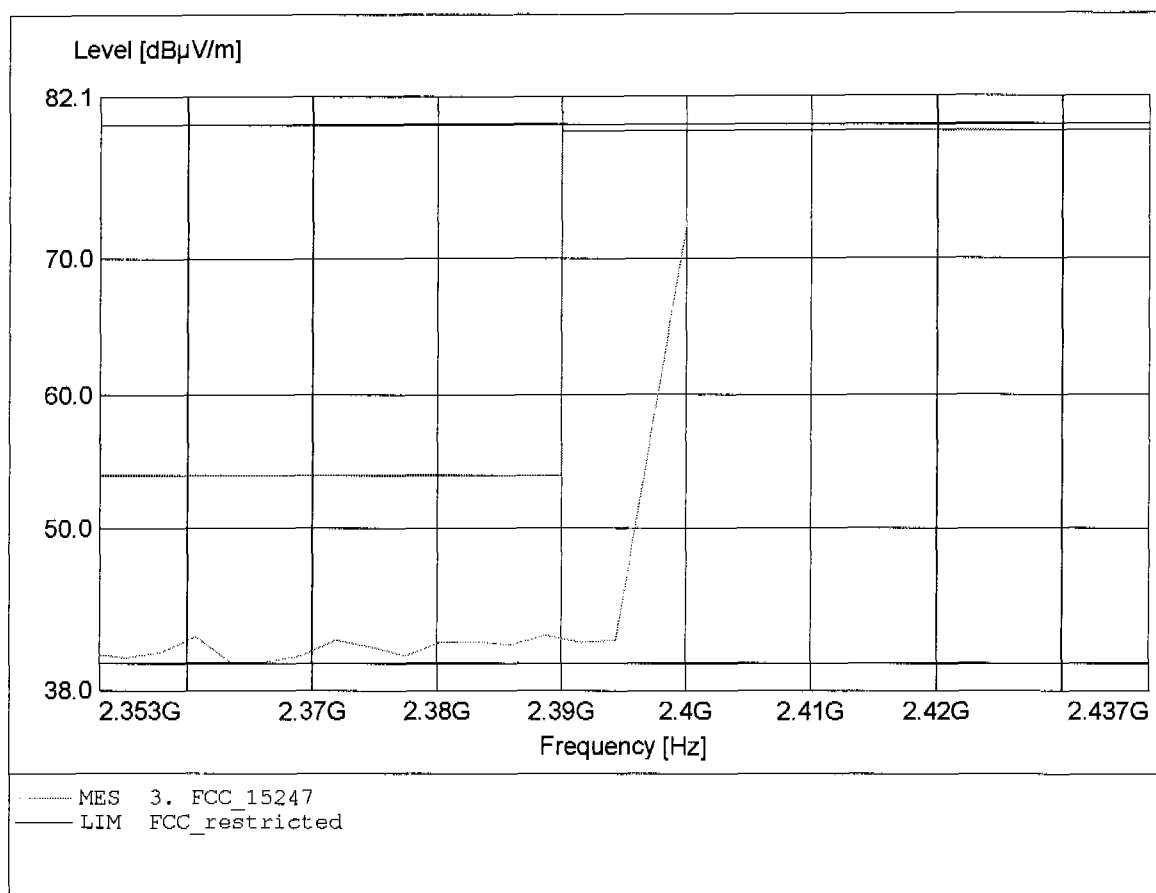


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.872GHz, Emax: 42.79dBµV/m, RBW: 1MHz

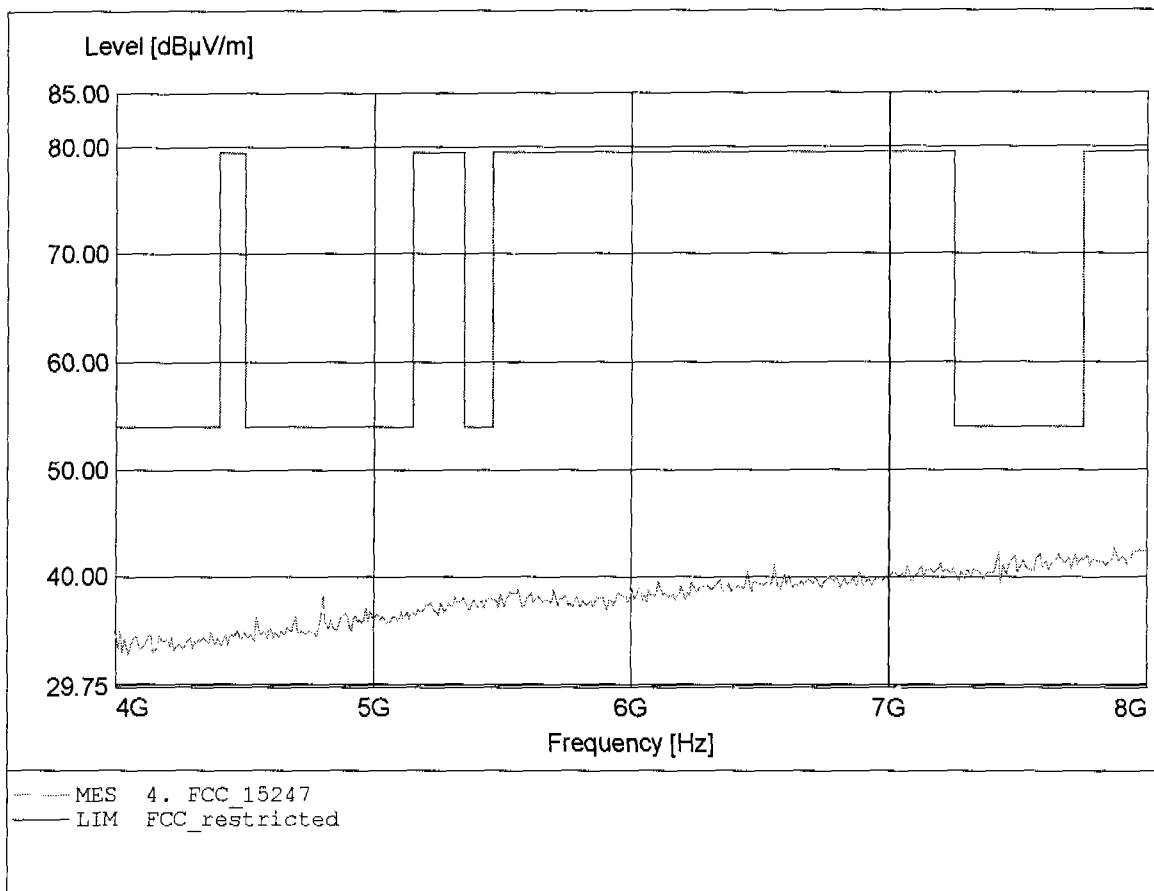


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 43.78dBµV/m, RBW: 1MHz

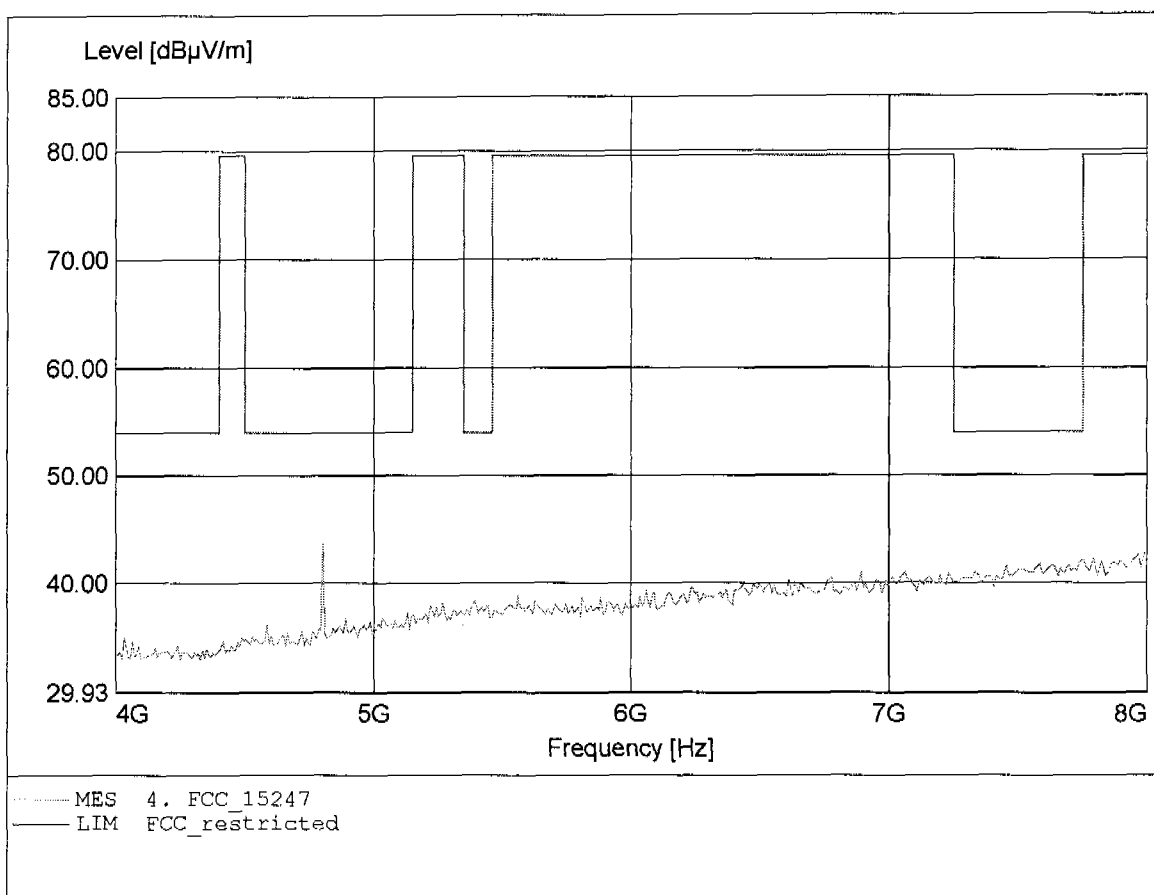


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.880GHz, Emax: 46.00dBµV/m, RBW: 1MHz

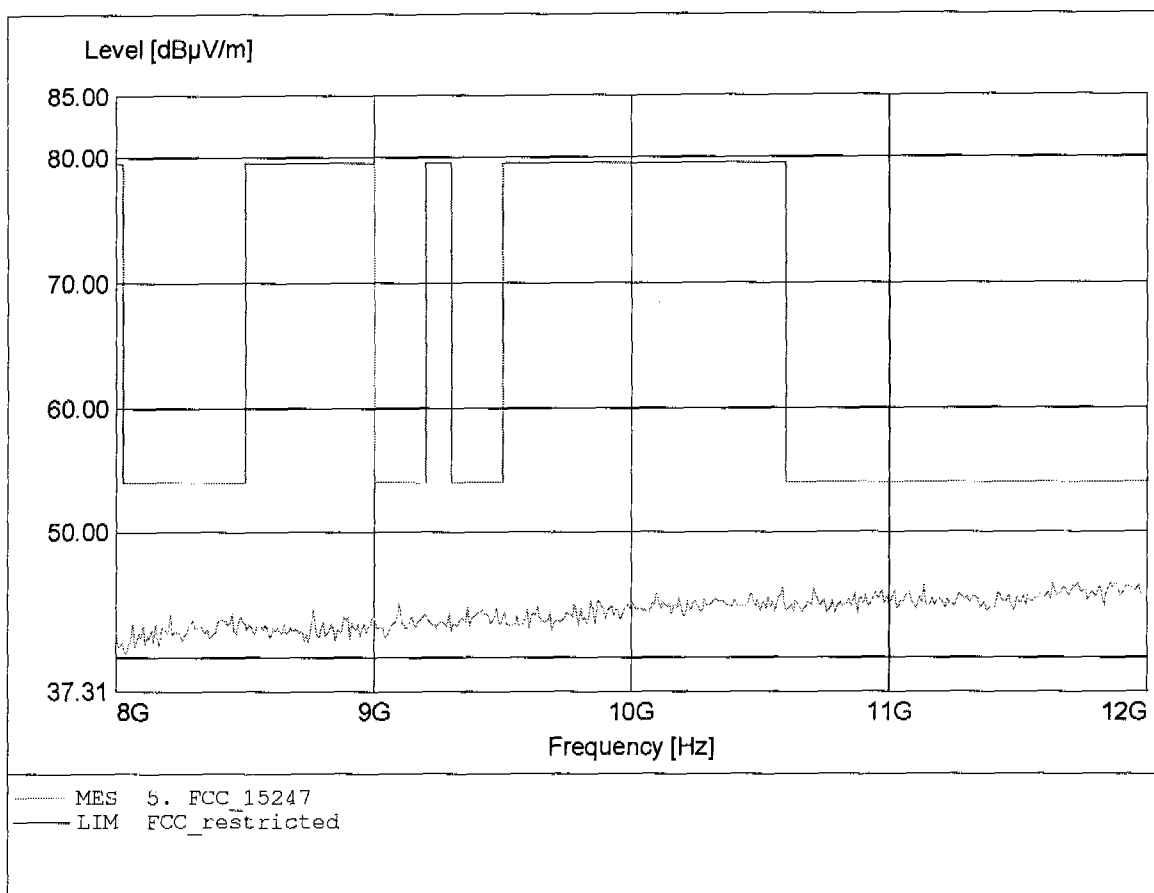


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.920GHz, Emax: 47.15dBµV/m, RBW: 1MHz

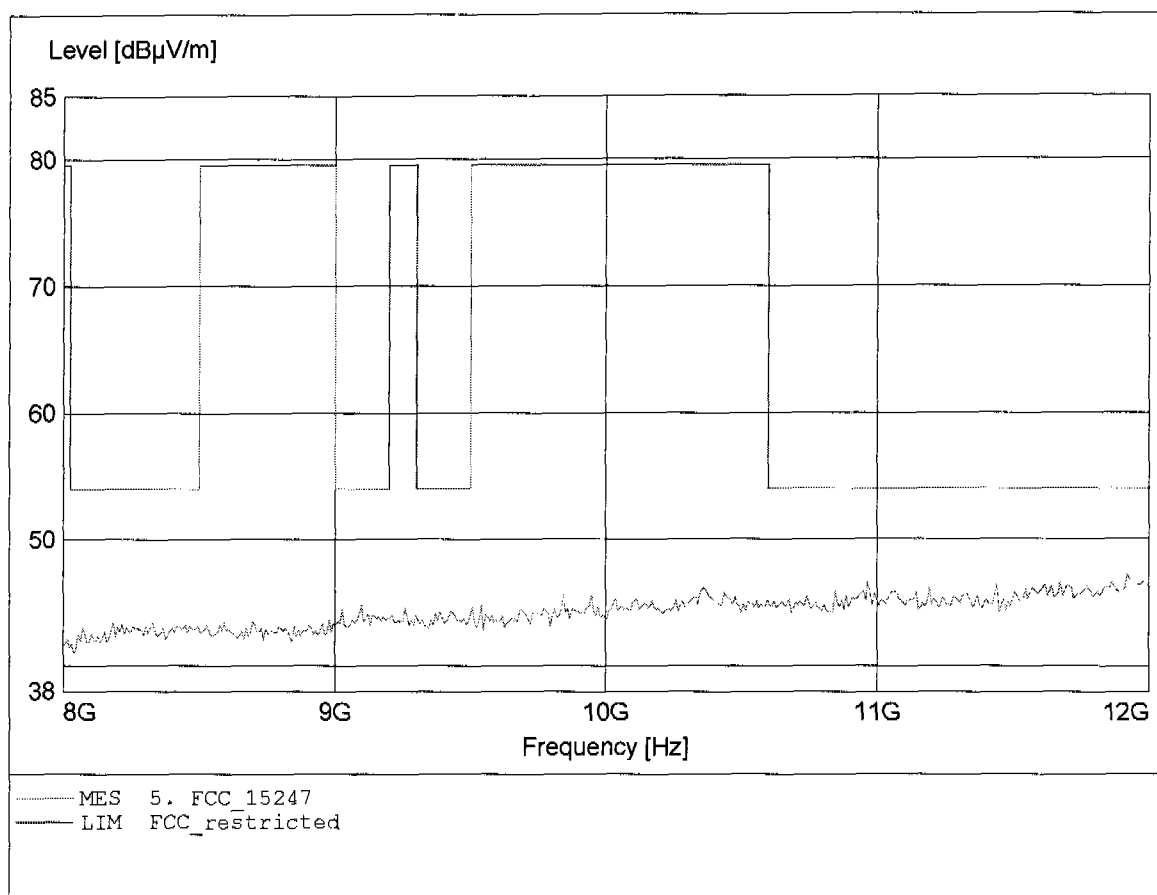


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.279GHz, Emax: 51.03dBµV/m, RBW: 1MHz

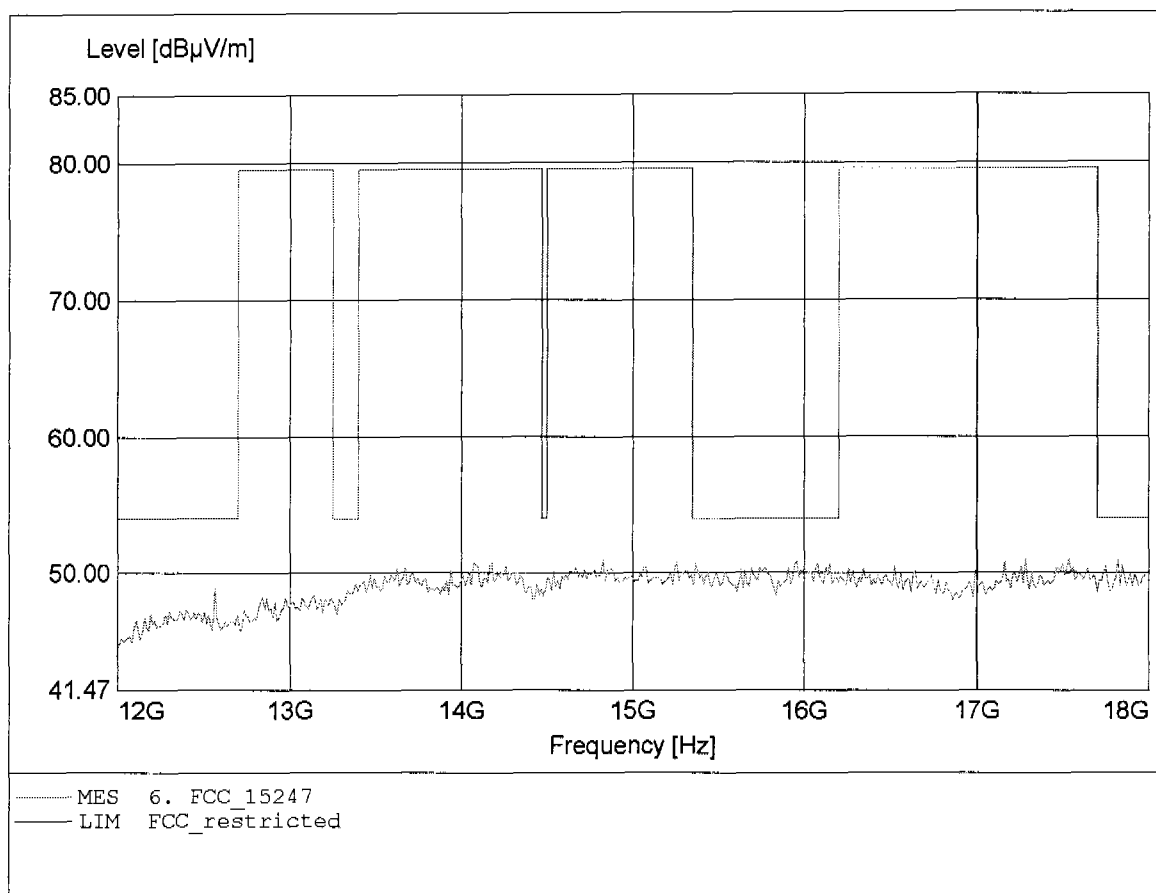


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 15.246GHz, Emax: 51.19dBµV/m, RBW: 1MHz

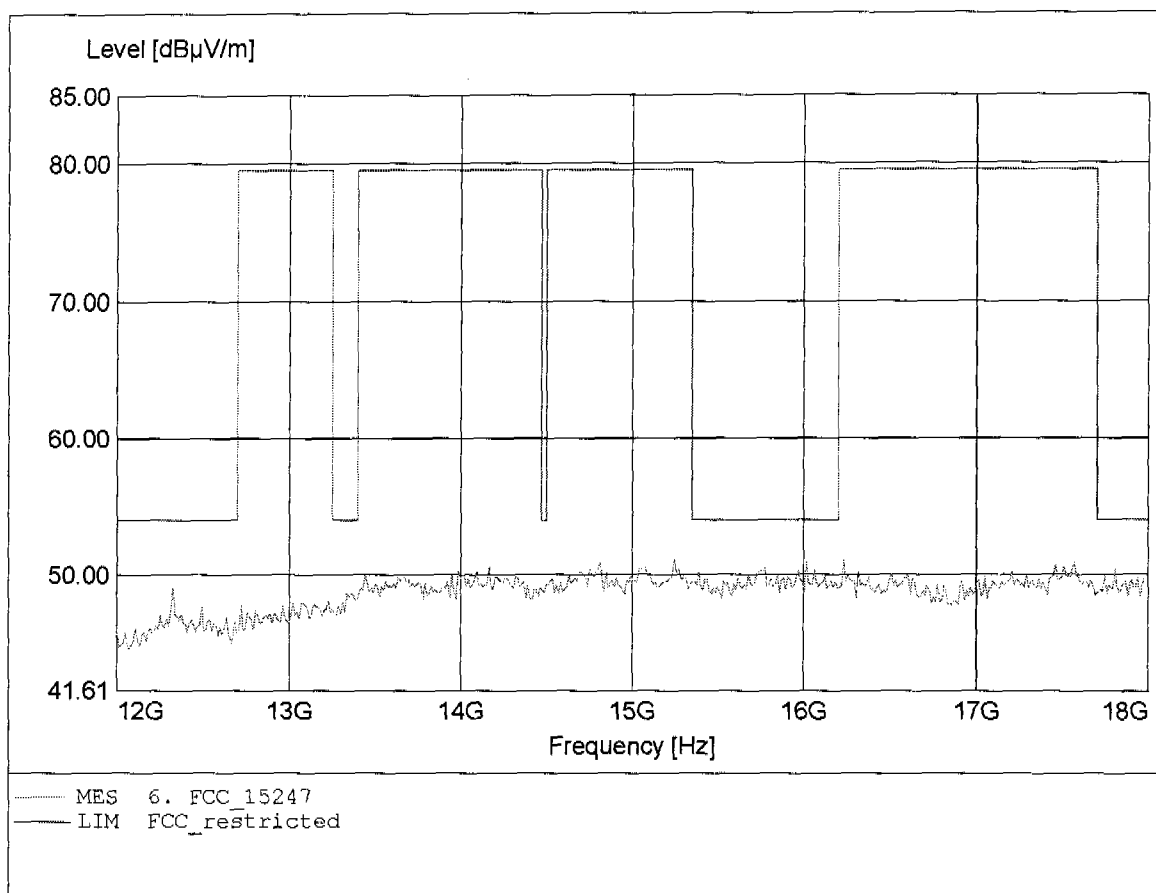


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 20.351GHz, Emax: 50.37dBµV/m, RBW: 1MHz

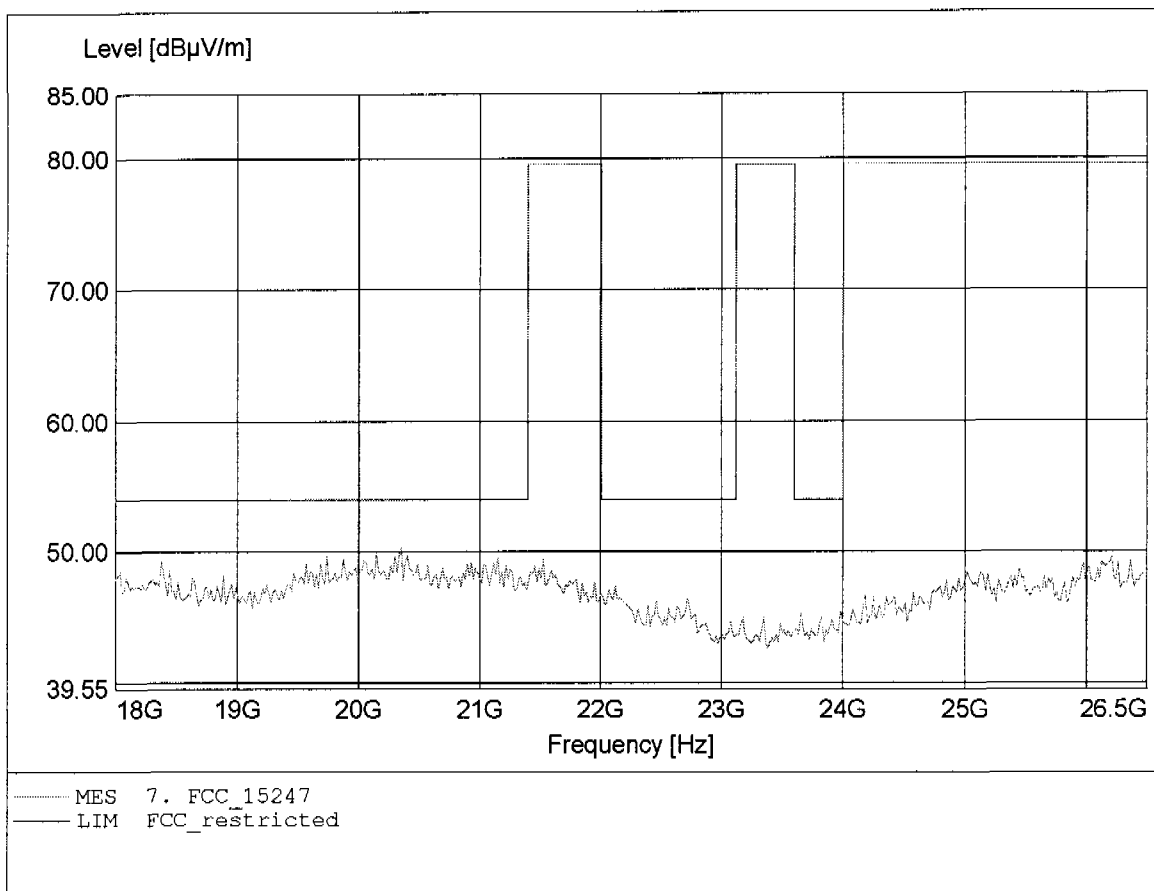


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2402 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 20.385GHz, Emax: 49.90dBµV/m, RBW: 1MHz

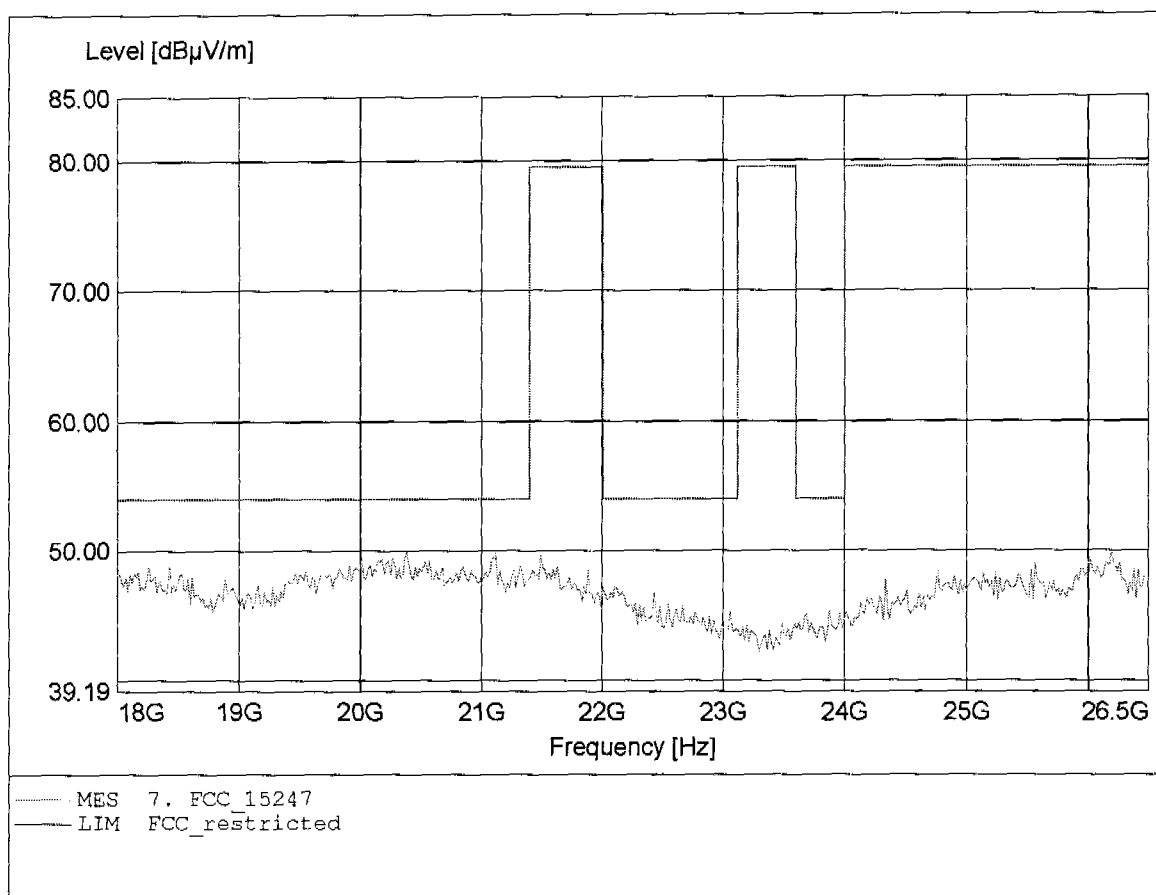


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 166.273MHz, Emax: 31.36dBµV/m, RBW: 100kHz

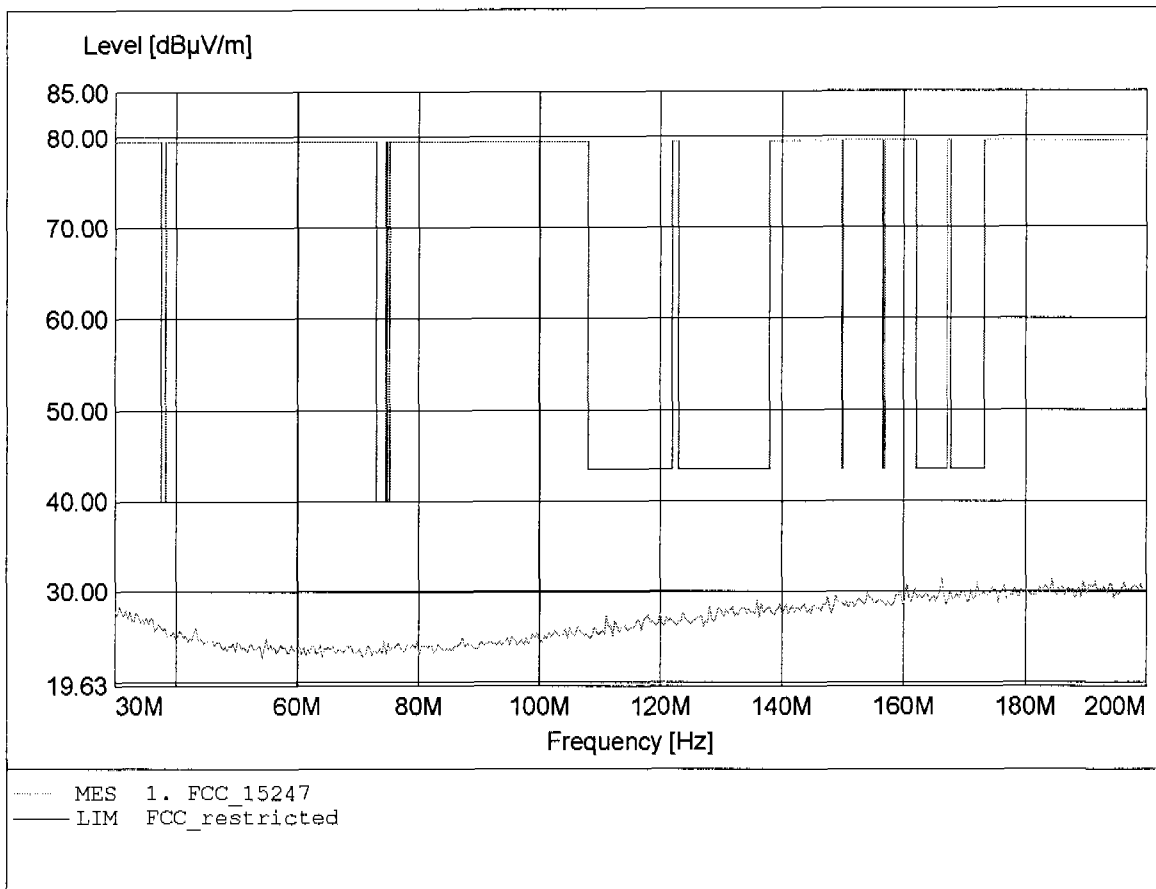


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.956MHz, Emax: 31.48dBµV/m, RBW: 100kHz

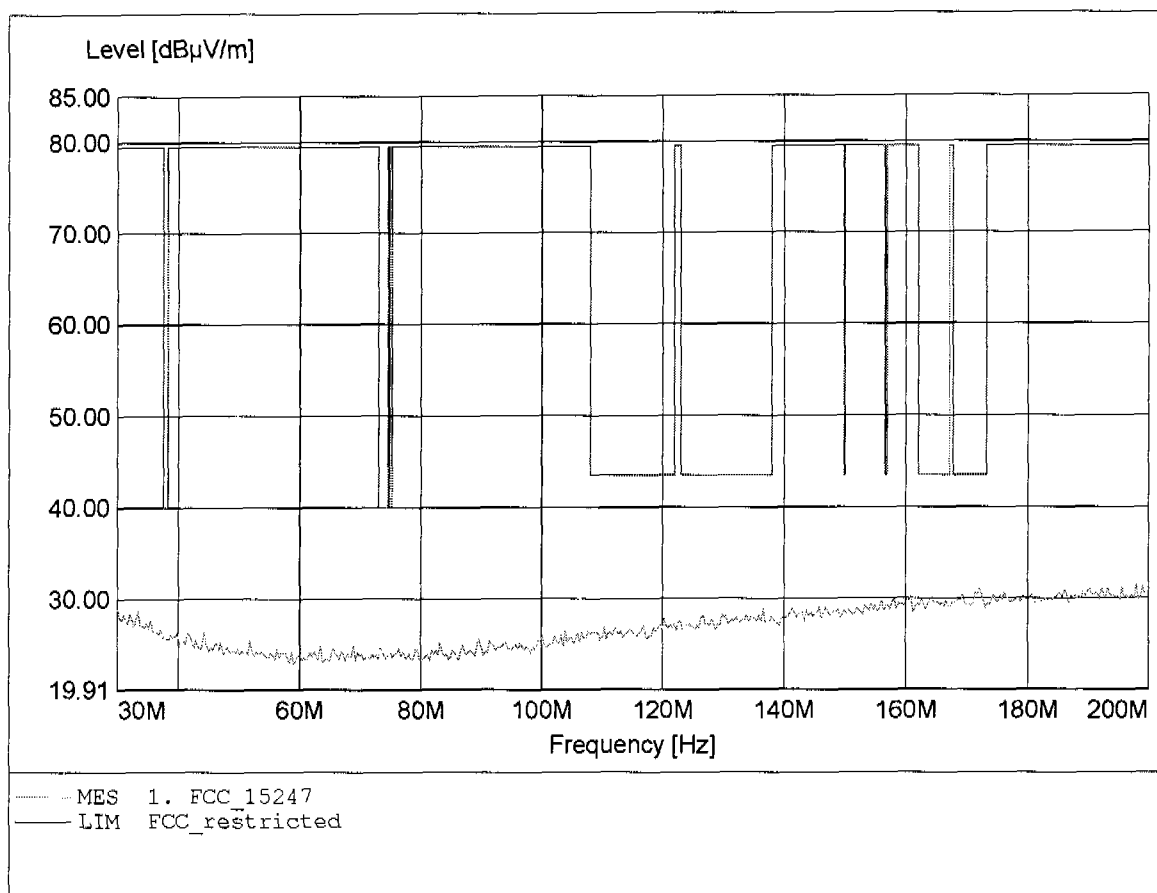


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 996.794MHz, Emax: 22.68dBµV/m, RBW: 100kHz

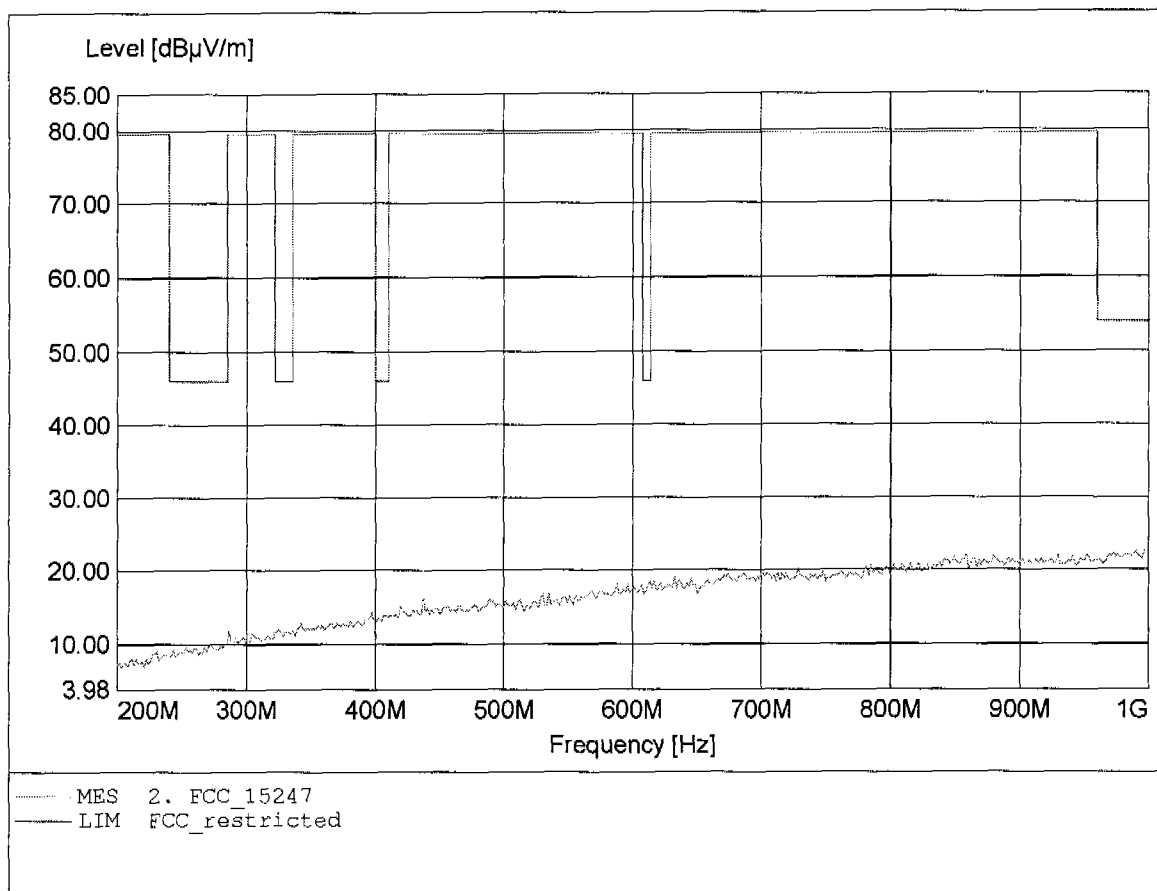


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 969.539MHz, Emax: 23.16dBµV/m, RBW: 100kHz

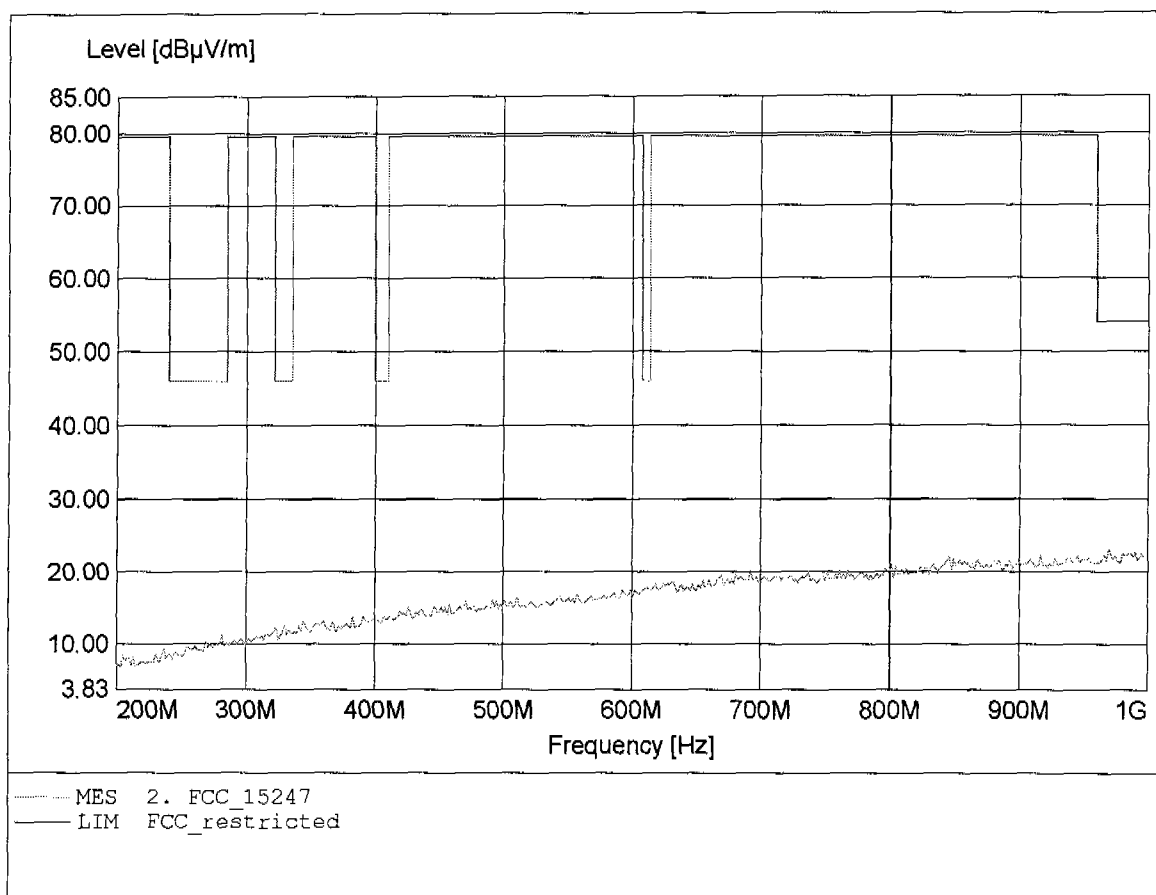


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 3.973GHz, Emax: 47.75dBµV/m, RBW: 1MHz

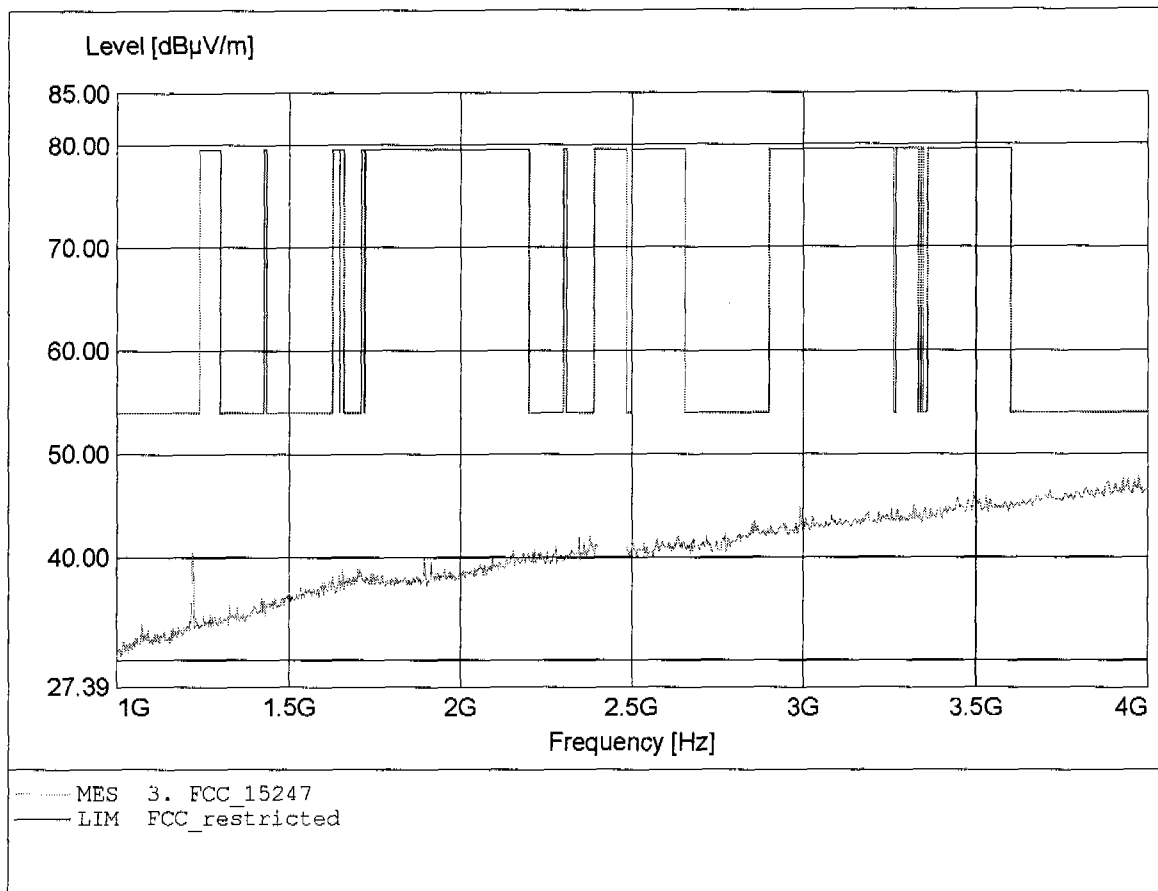


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 4.000GHz, Emax: 47.51dBµV/m, RBW: 1MHz

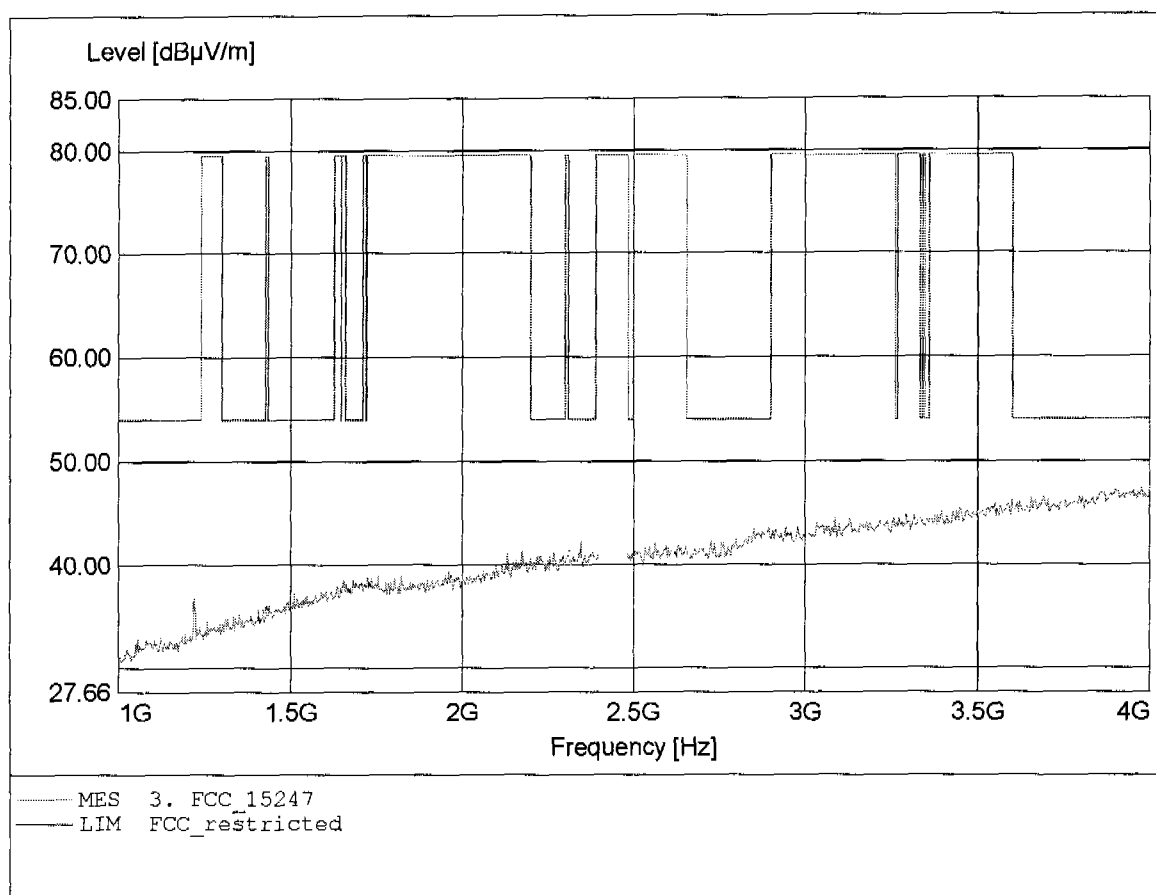


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 42.91dBµV/m, RBW: 1MHz

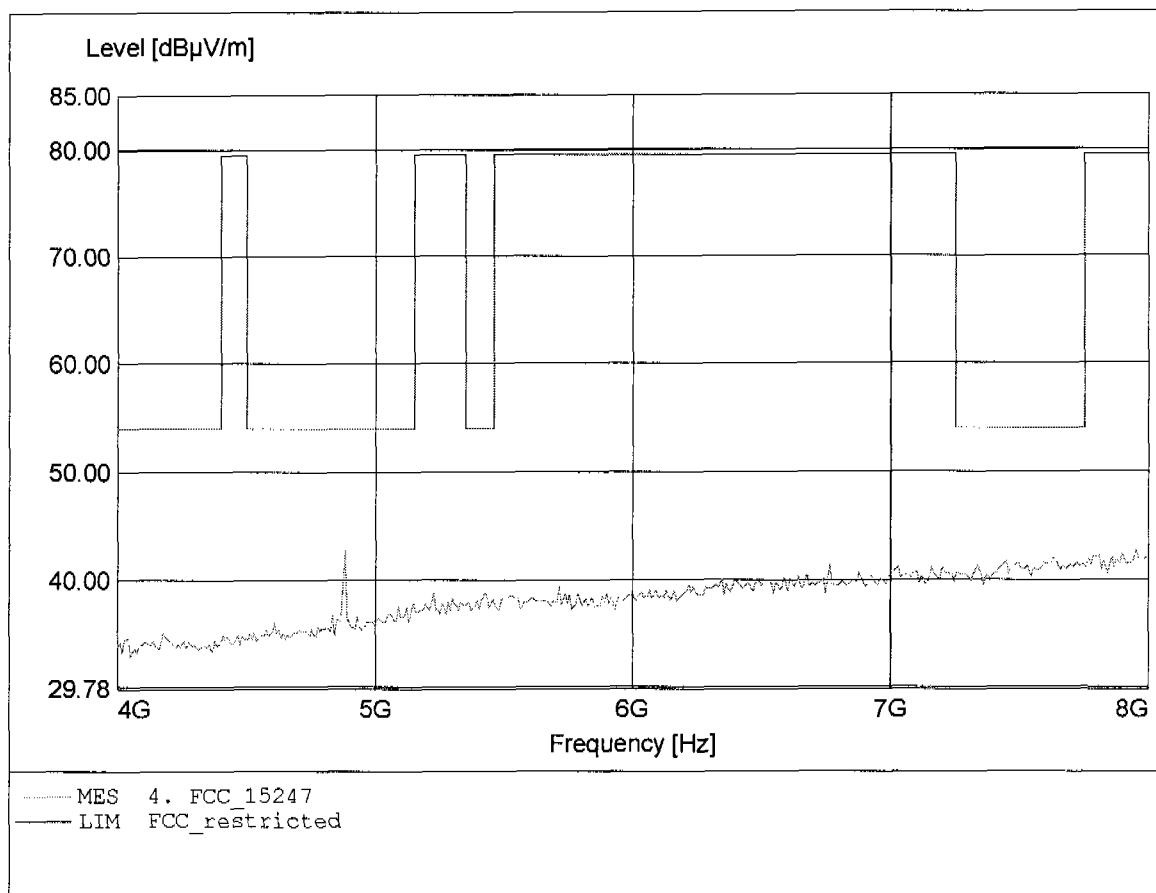


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 43.84dBµV/m, RBW: 1MHz

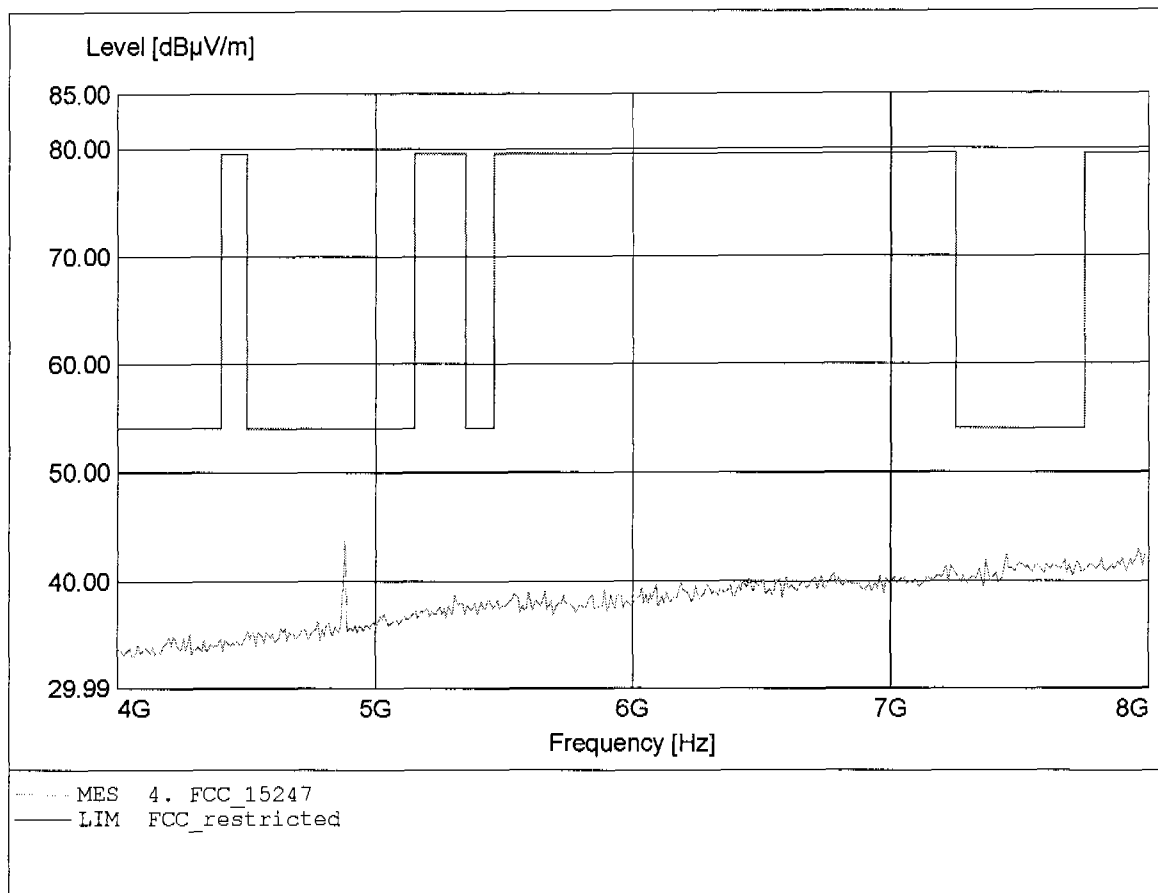


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.679GHz, Emax: 46.54dBµV/m, RBW: 1MHz

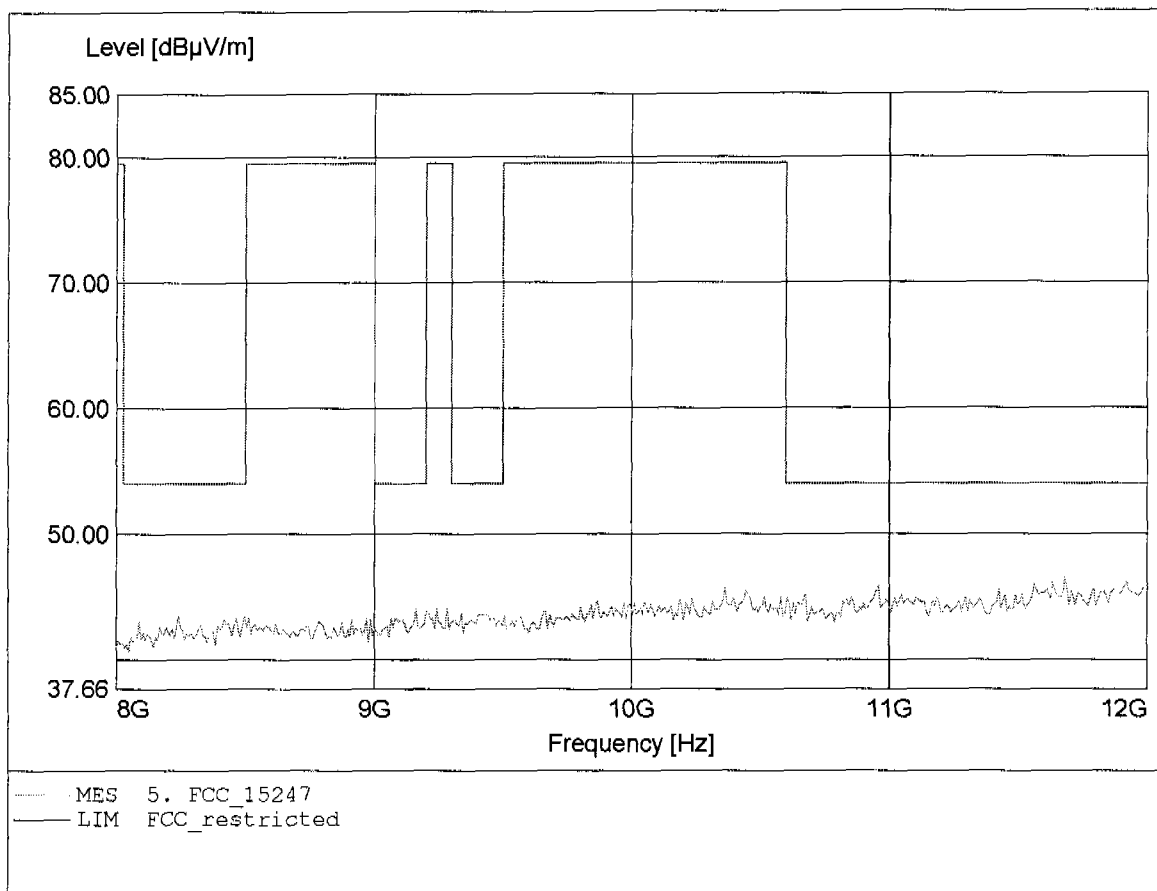


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.888GHz, Emax: 46.71dBuV/m, RBW: 1MHz

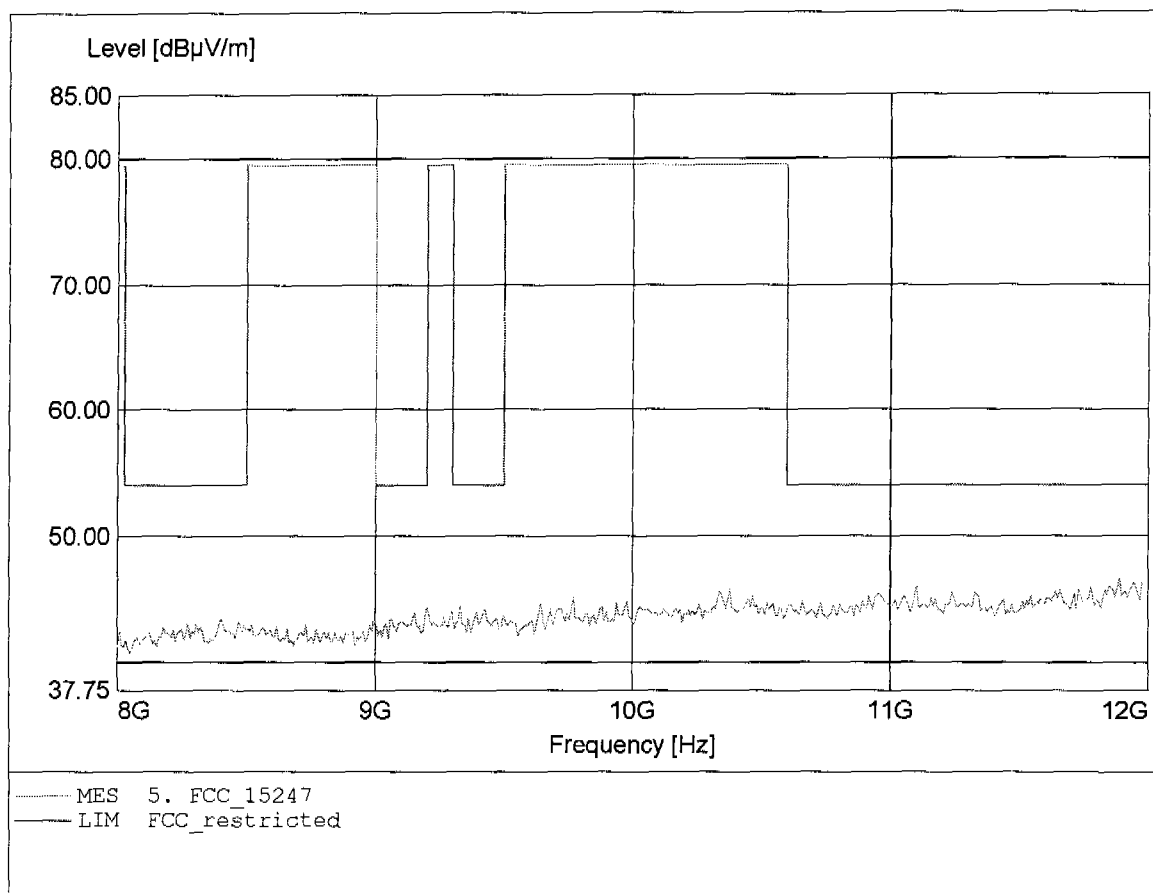


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.898GHz, Emax: 51.39dBµV/m, RBW: 1MHz

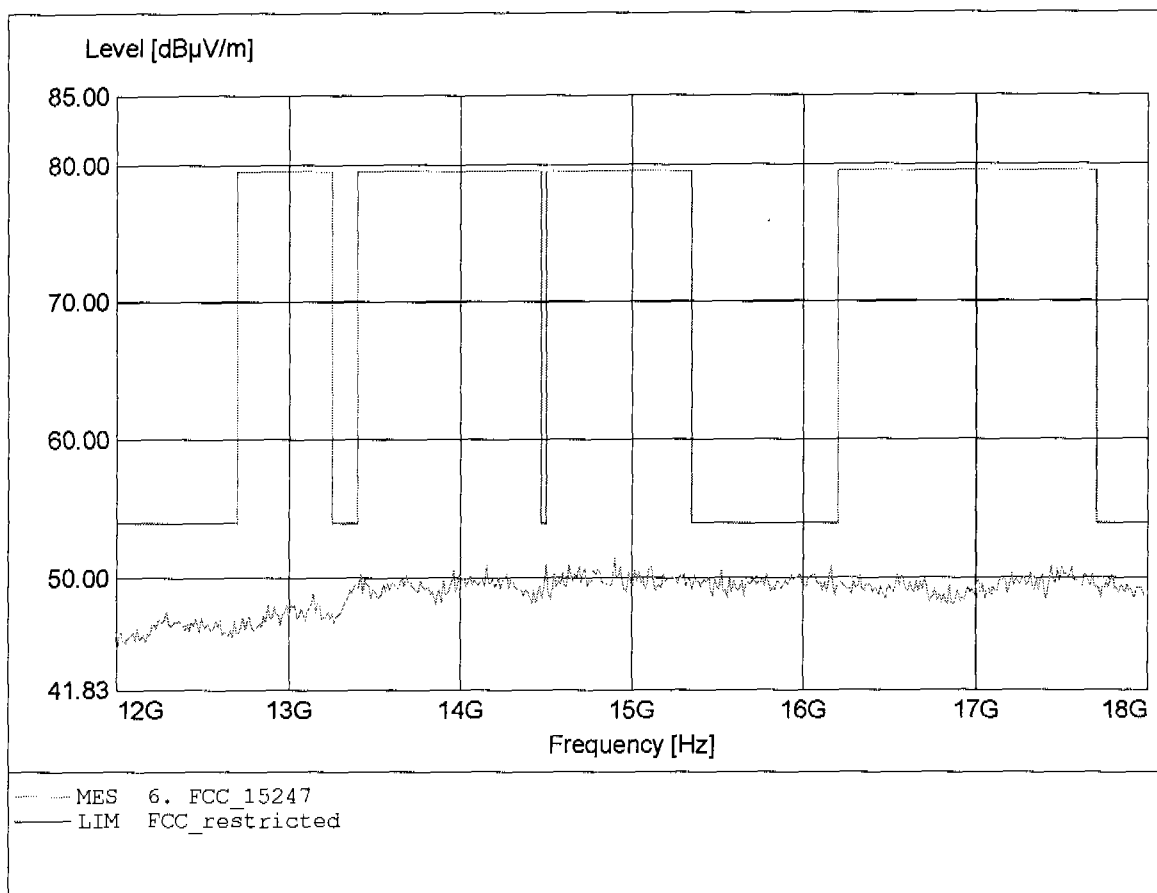


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.016GHz, Emax: 51.73dBµV/m, RBW: 1MHz

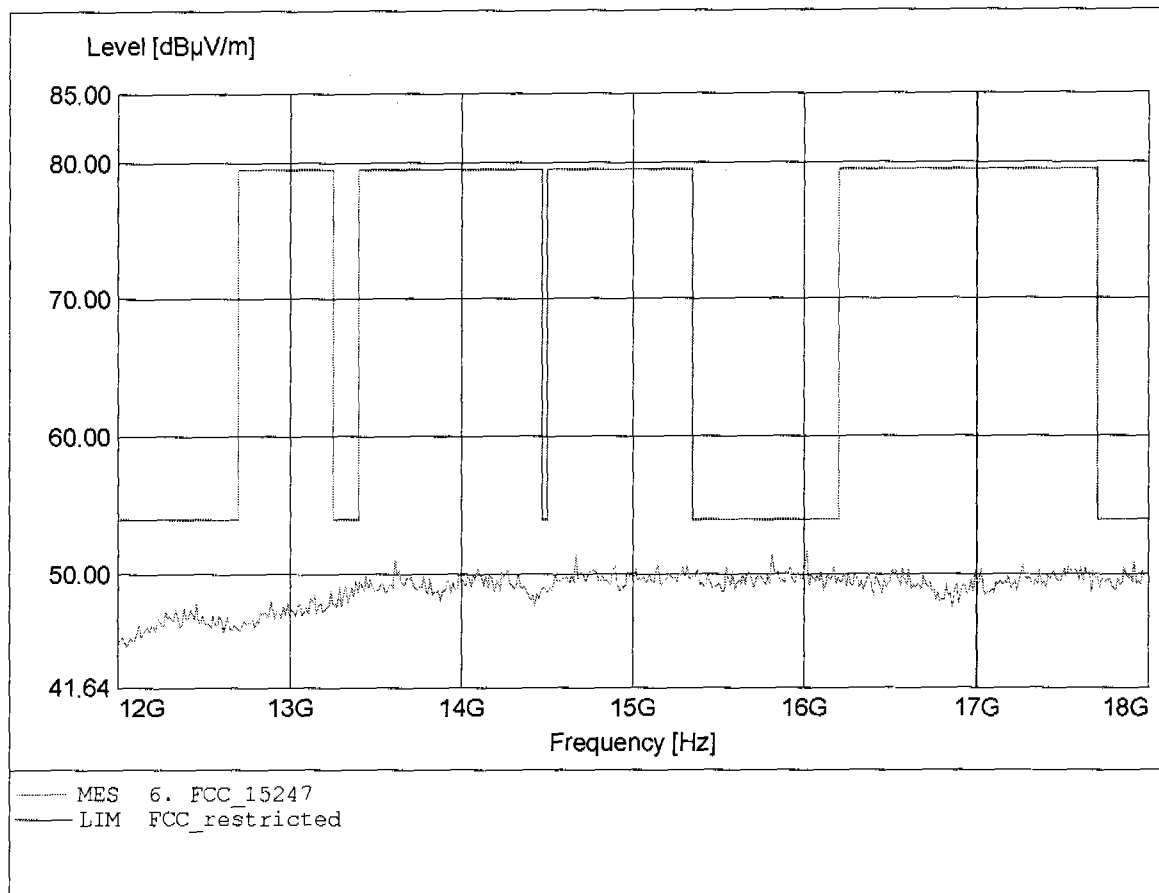


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 25.955GHz, Emax: 45.76dBµV/m, RBW: 1MHz

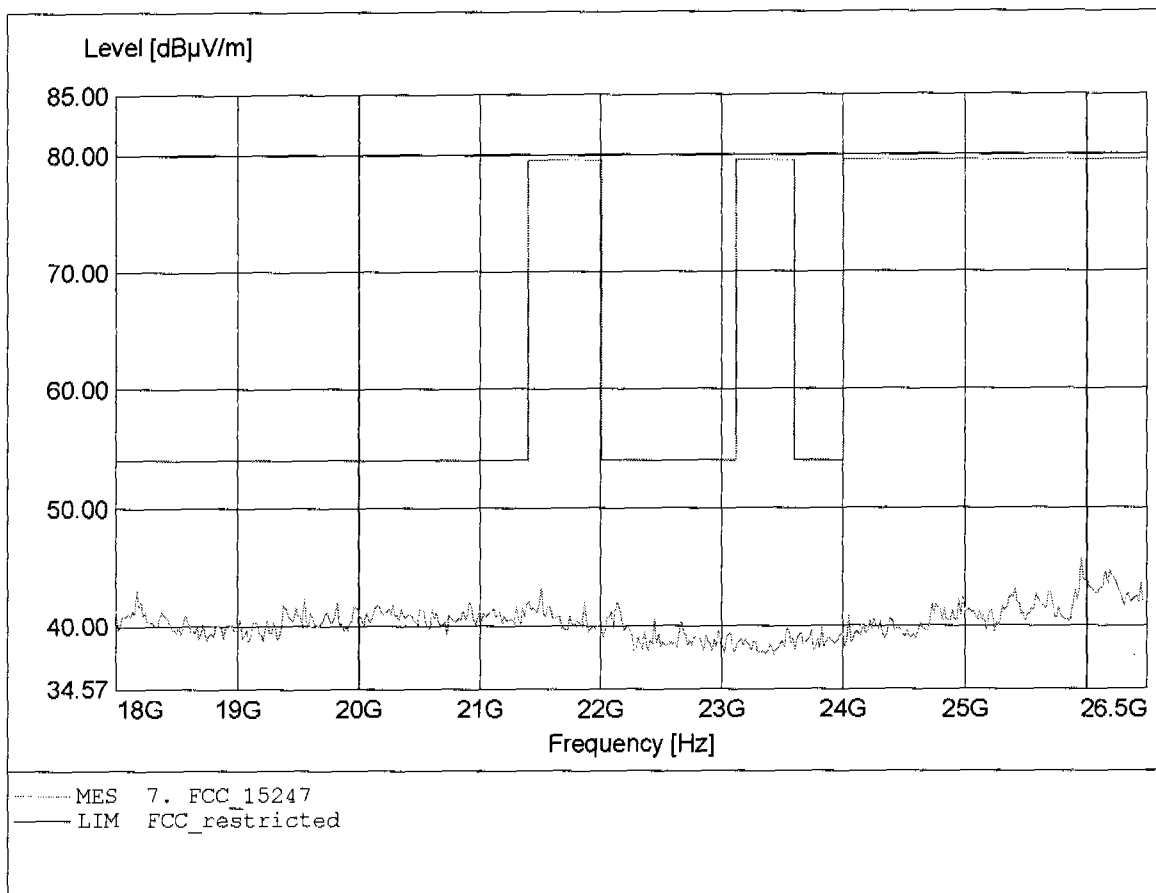


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2441 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 19.959GHz, Emax: 50.29dBµV/m, RBW: 1MHz

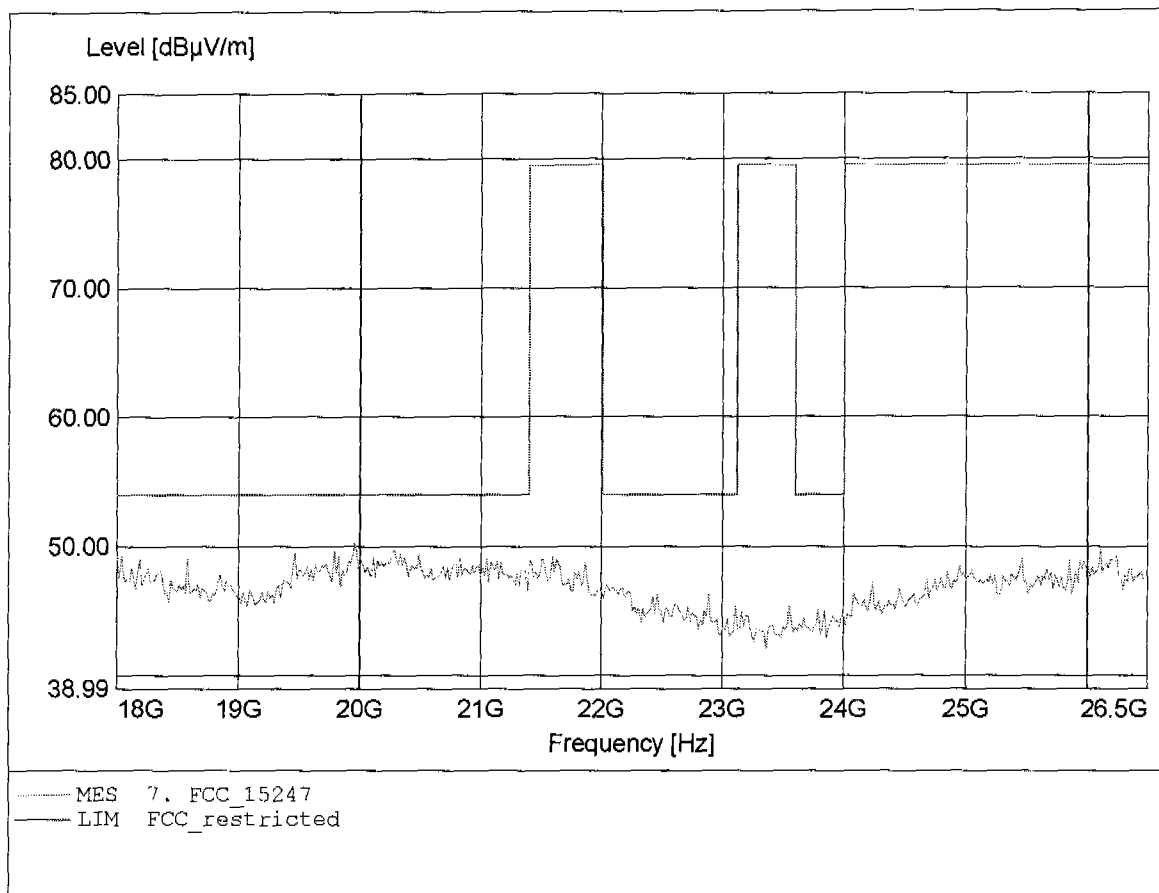


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 185.691MHz, Emax: 32.13dBµV/m, RBW: 100kHz

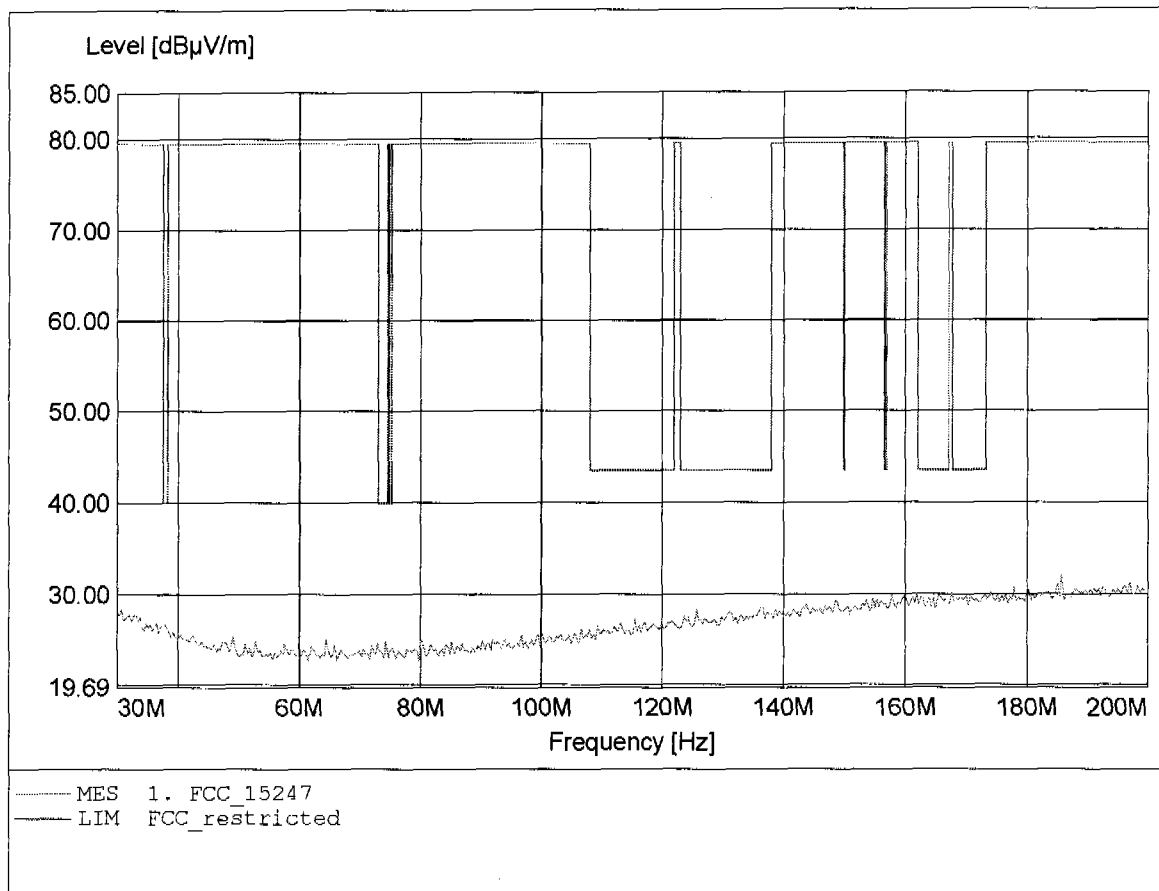


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 180.581MHz, Emax: 31.60dBµV/m, RBW: 100kHz

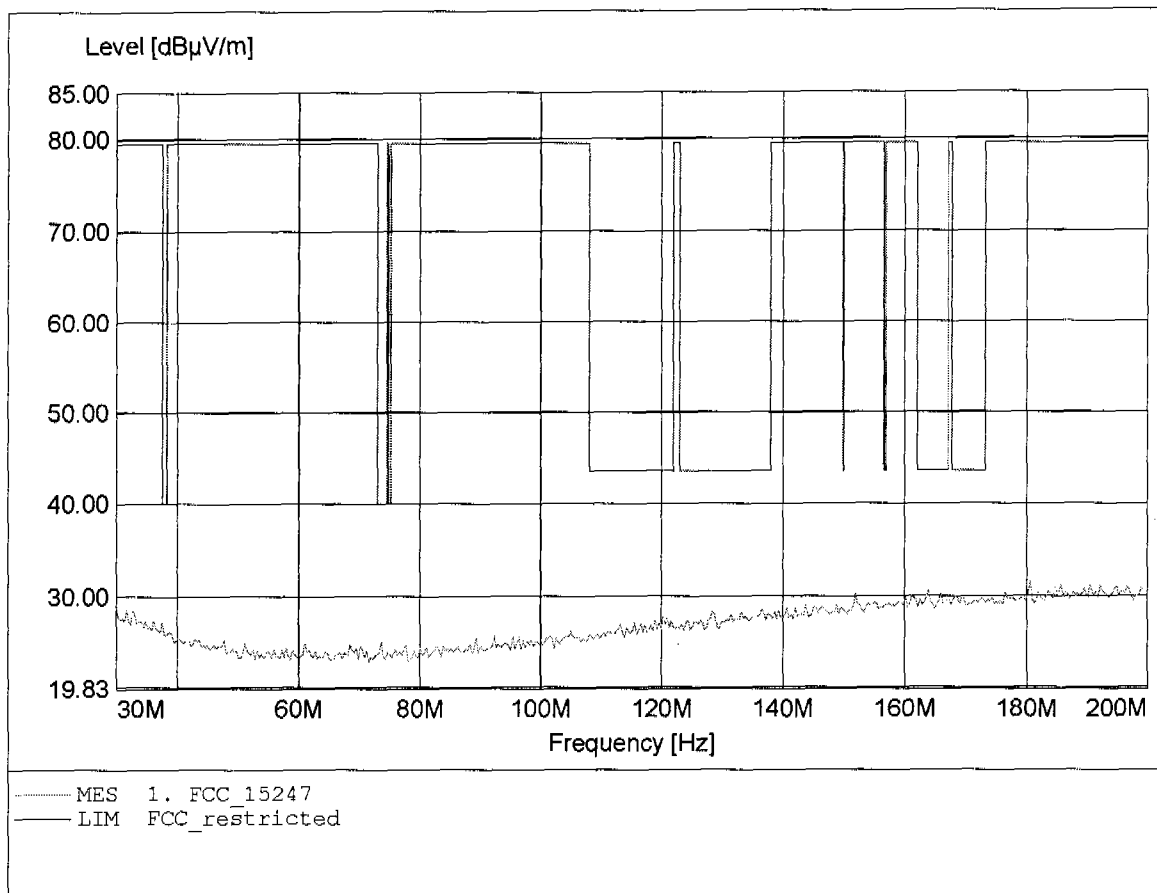


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 961.523MHz, Emax: 22.95dBµV/m, RBW: 100kHz

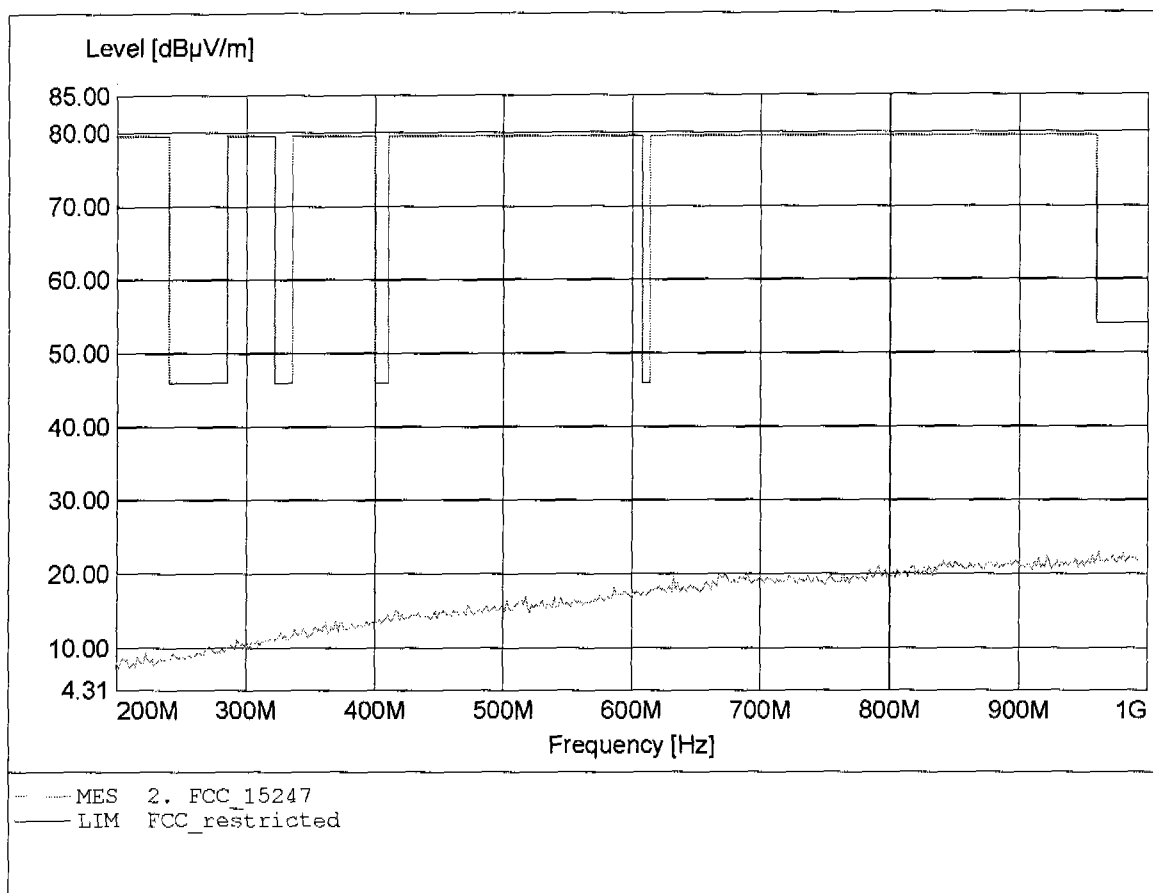


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 982.365MHz, Emax: 22.37dBuV/m, RBW: 100kHz

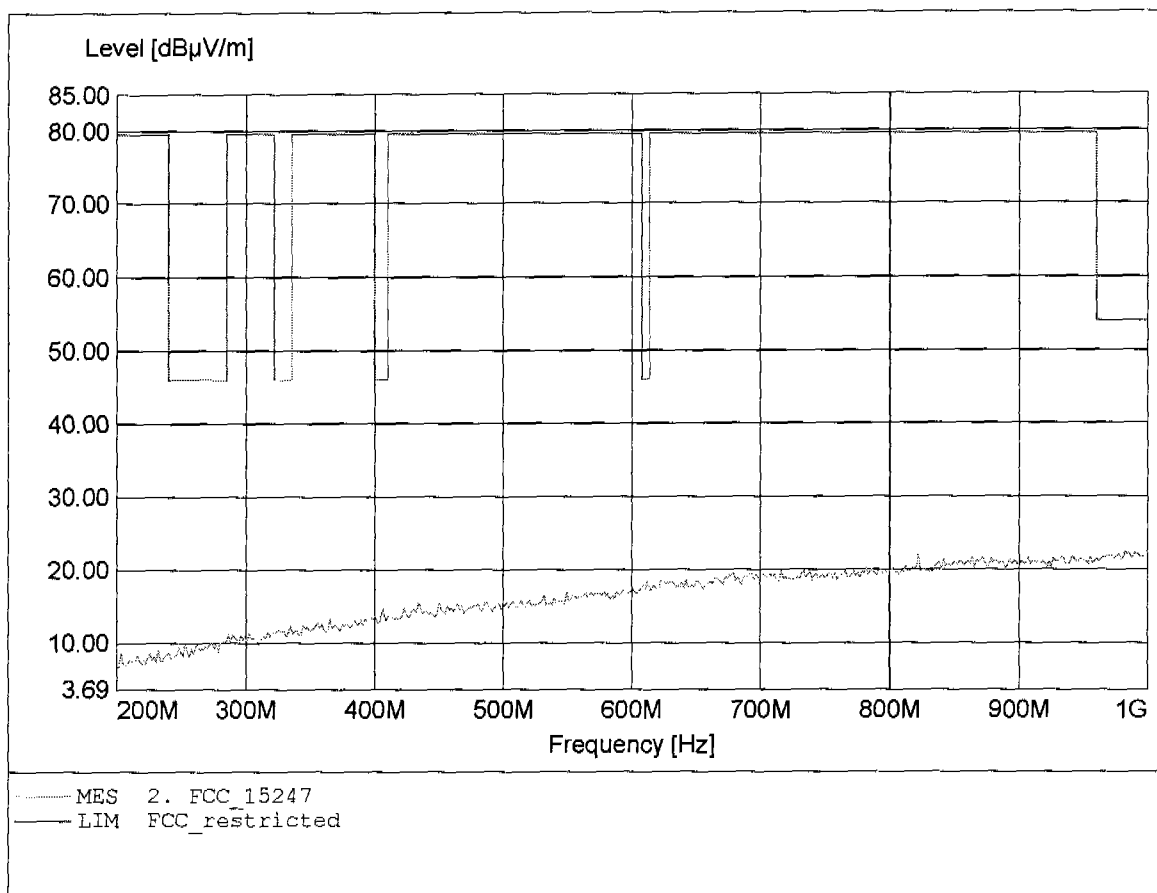


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 53.97dBµV/m, RBW: 1MHz

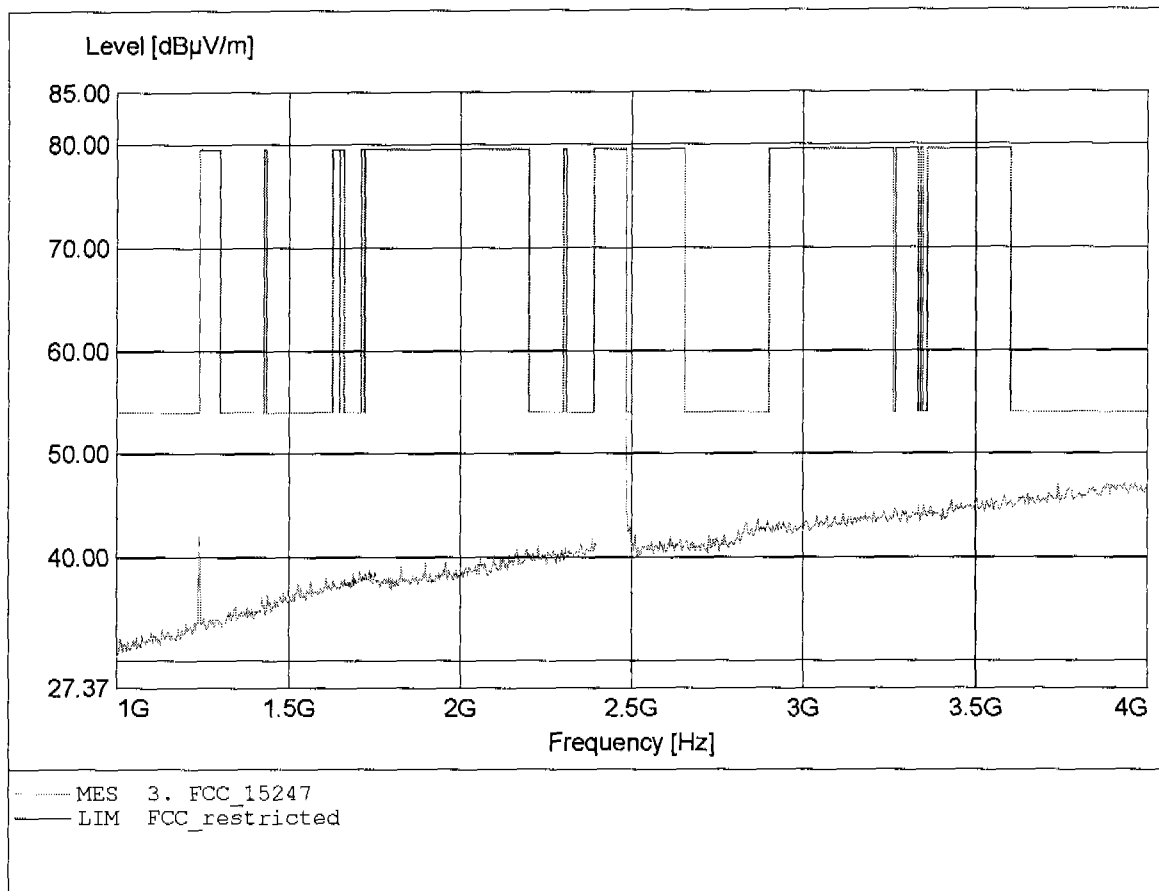


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 53.97dBµV/m, RBW: 1MHz

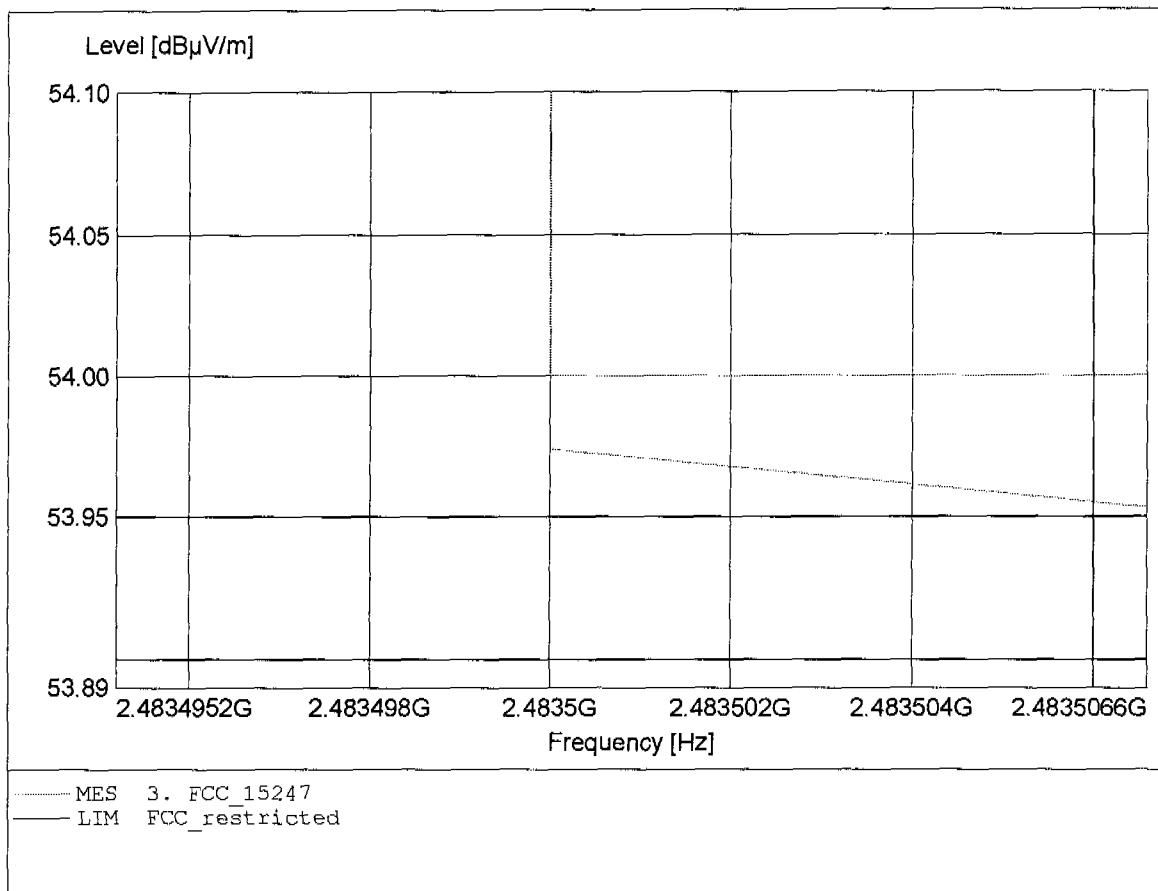


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 52.89dBµV/m, RBW: 1MHz

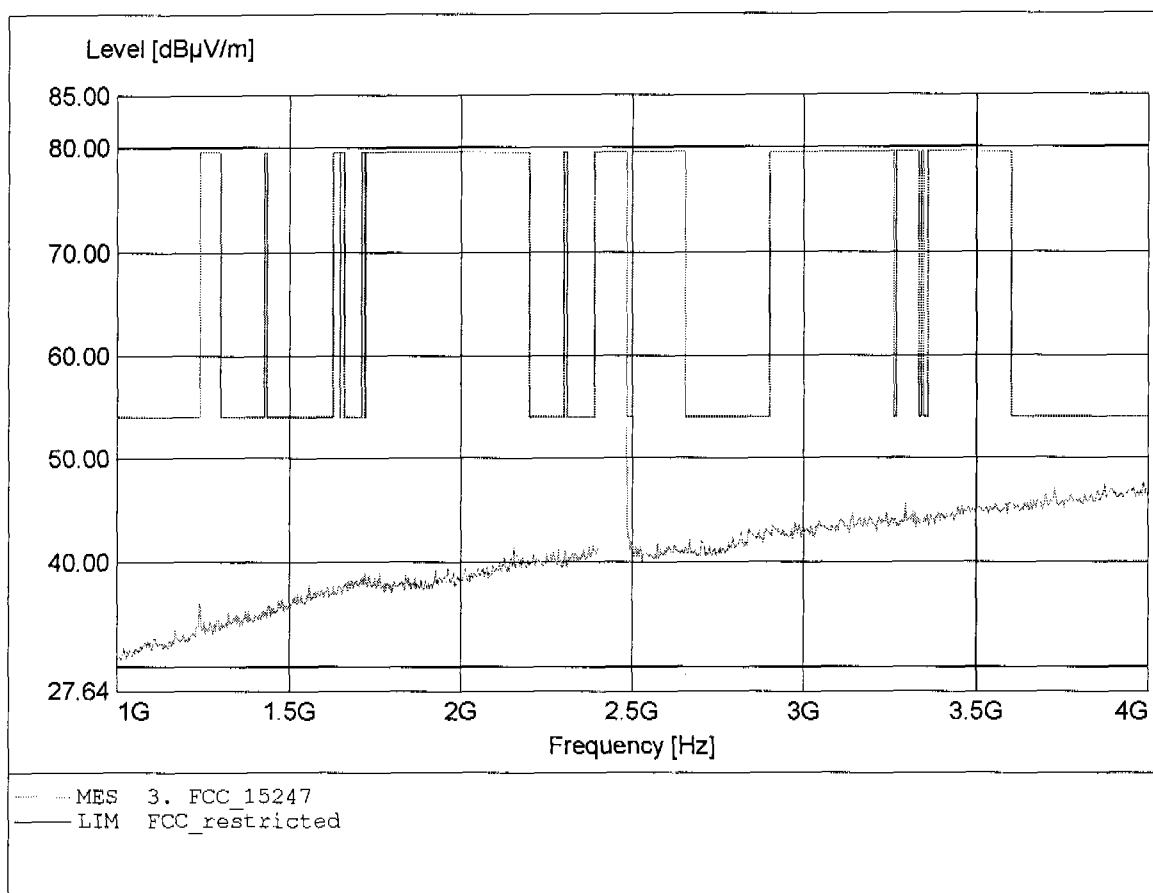


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.960GHz, Emax: 43.20dBµV/m, RBW: 1MHz

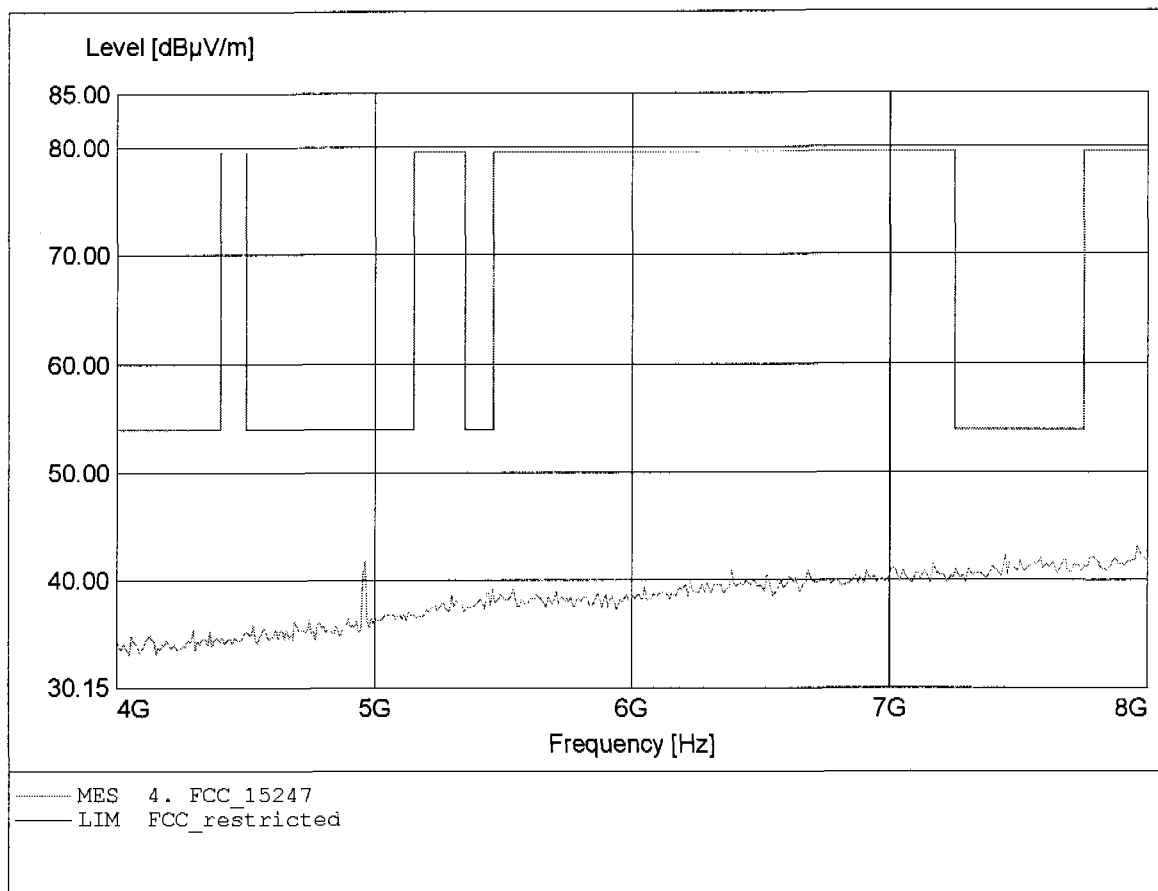


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 43.27dBµV/m, RBW: 1MHz

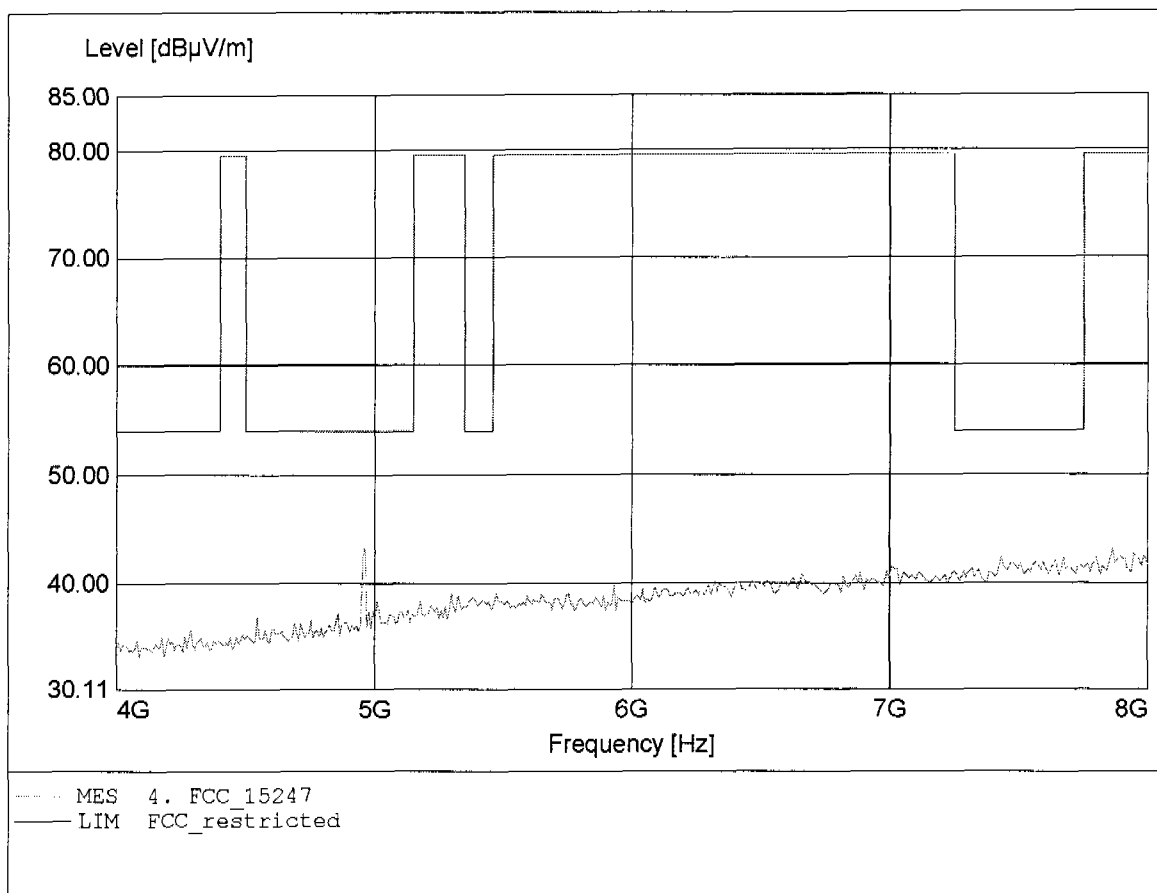


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.824GHz, Emax: 46.53dBuV/m, RBW: 1MHz

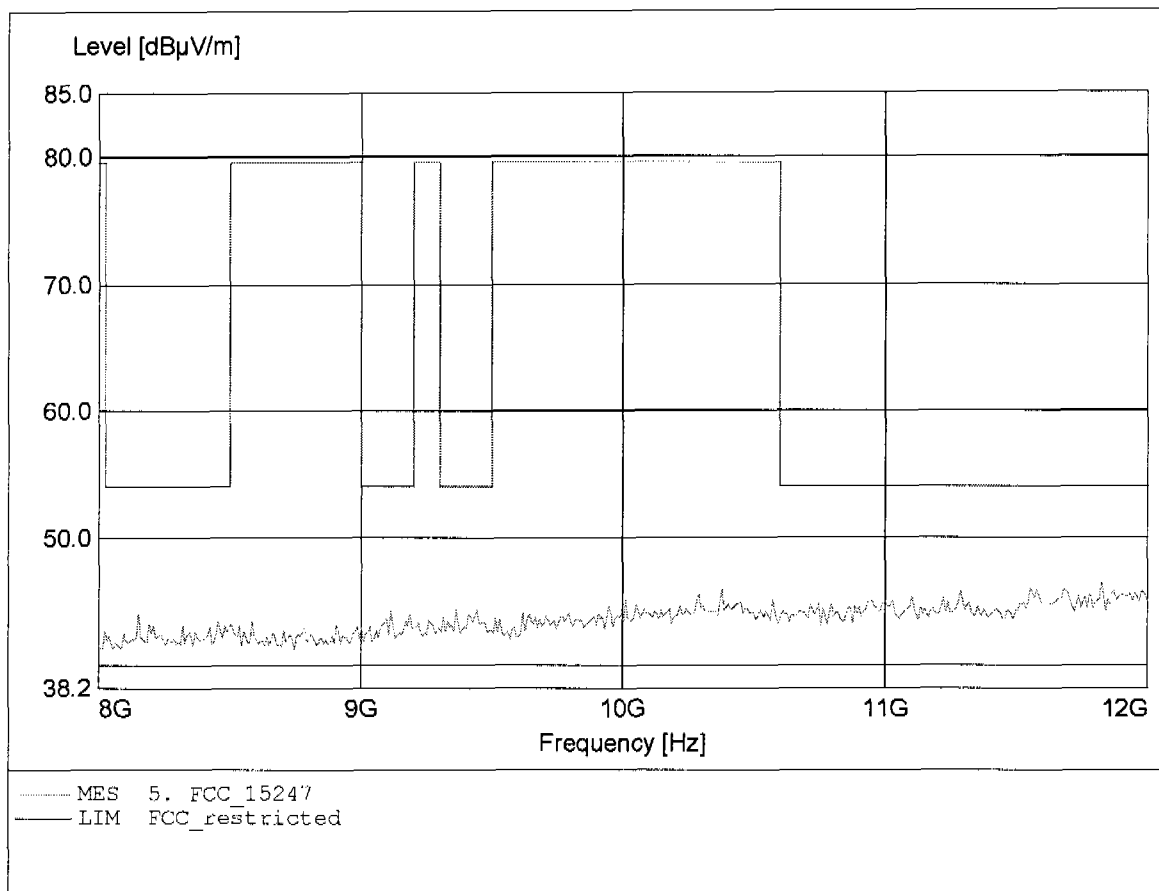


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.639GHz, Emax: 46.77dBµV/m, RBW: 1MHz

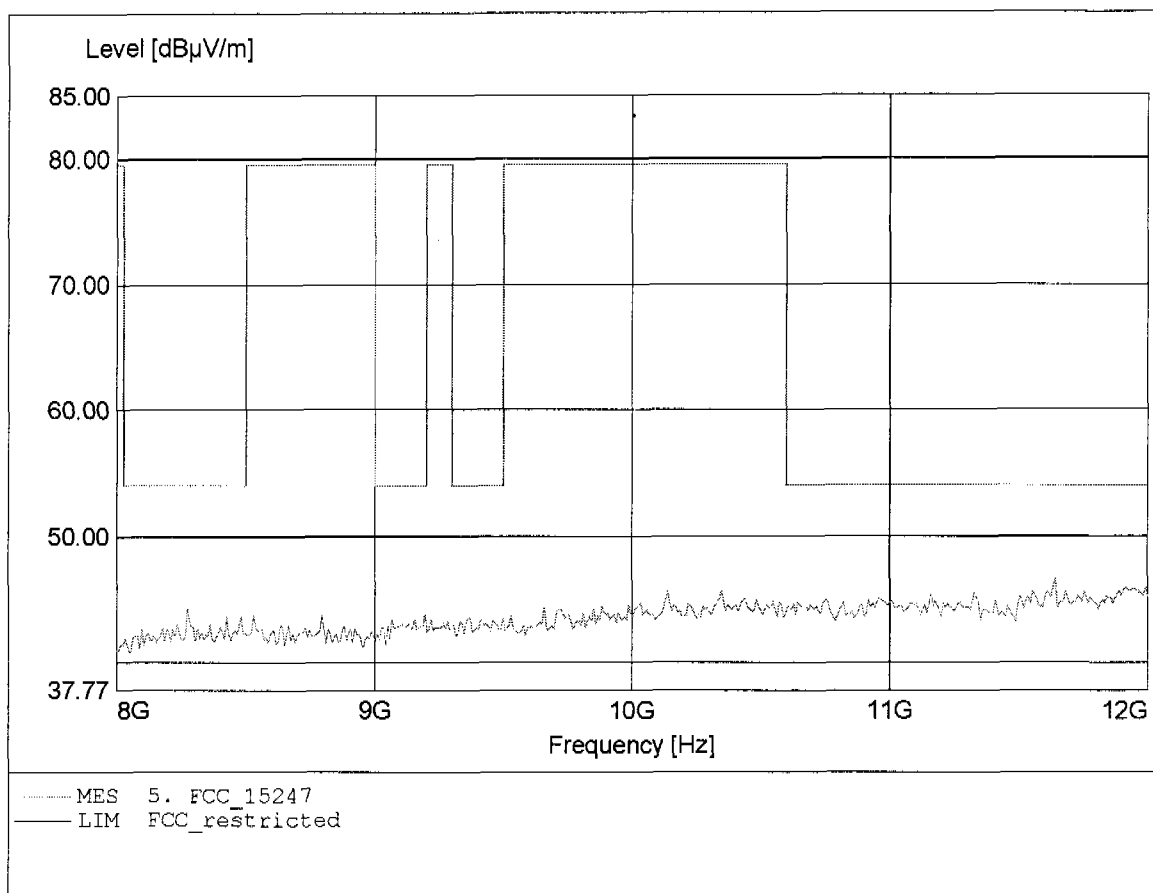


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.248GHz, Emax: 51.24dBµV/m, RBW: 1MHz

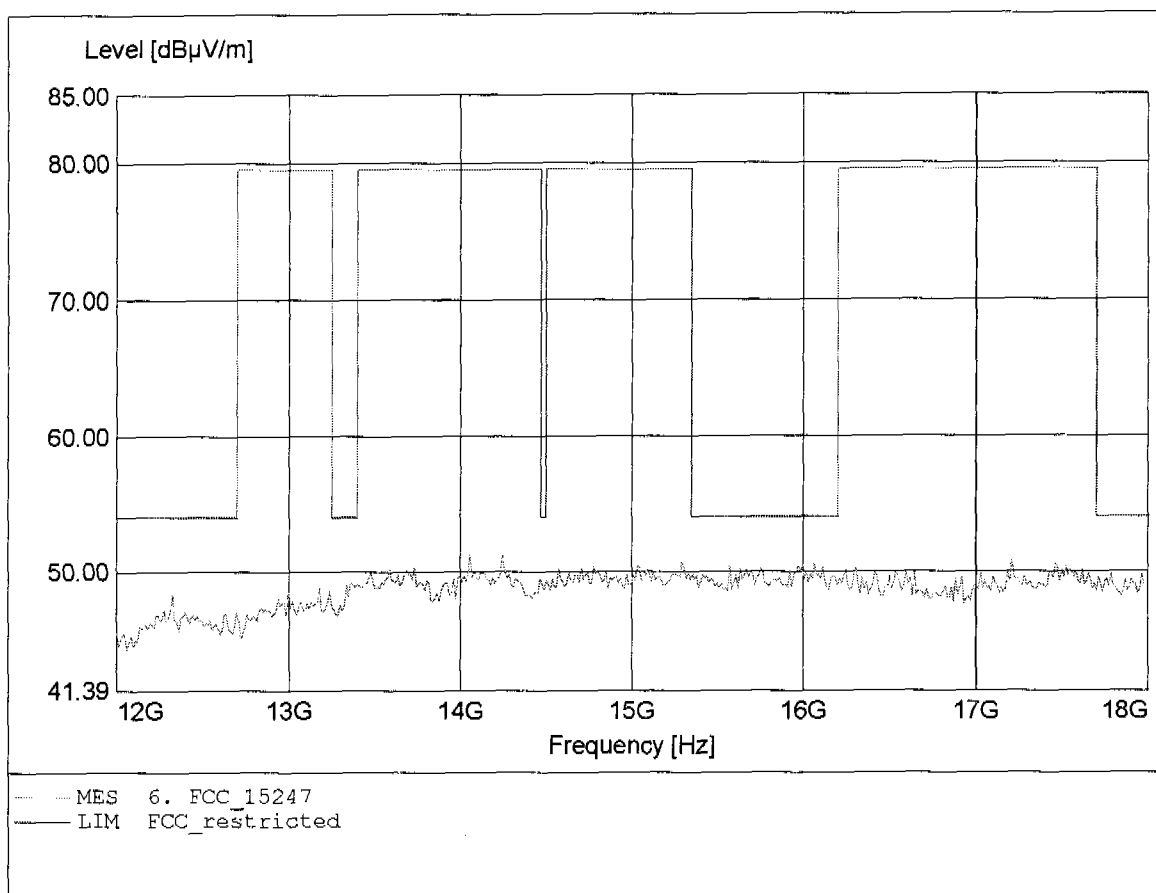


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 15.295GHz, Emax: 52.81dBµV/m, RBW: 1MHz

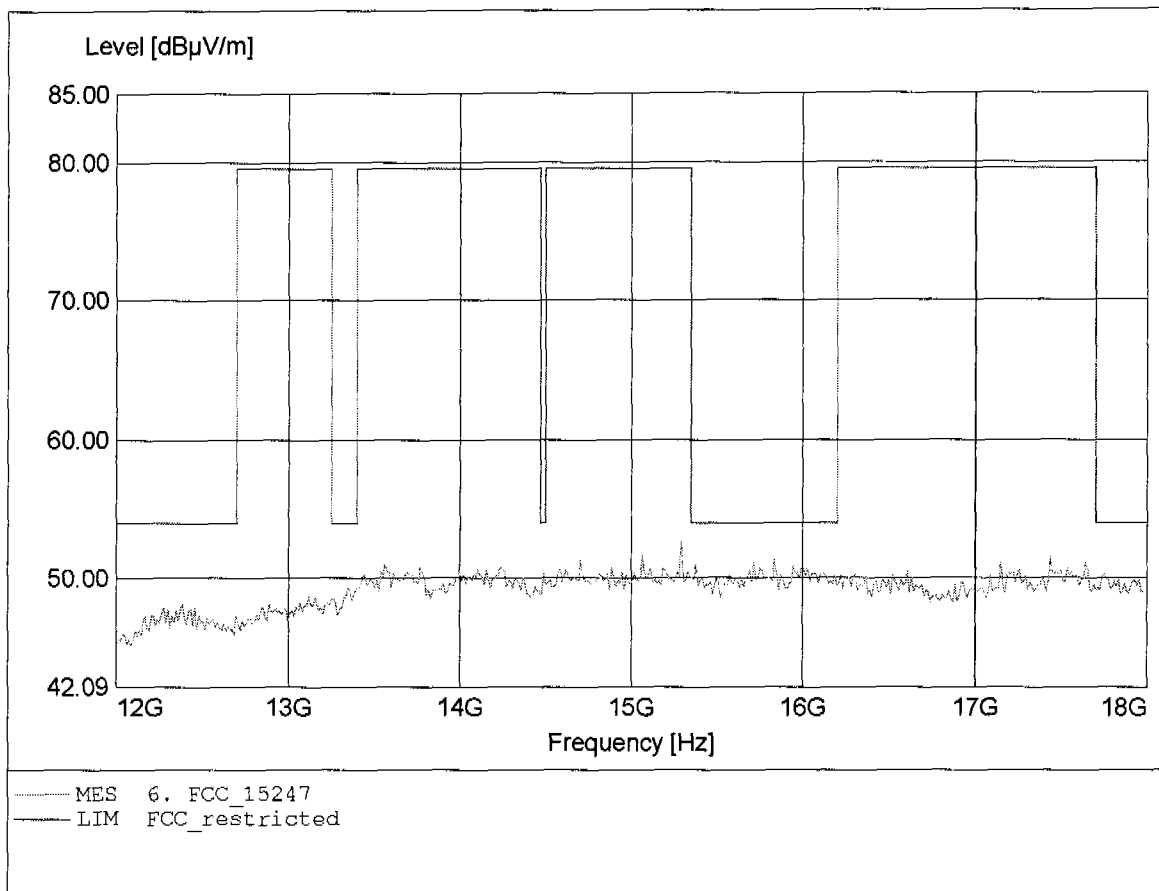


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.204GHz, Emax: 48.02dBµV/m, RBW: 1MHz

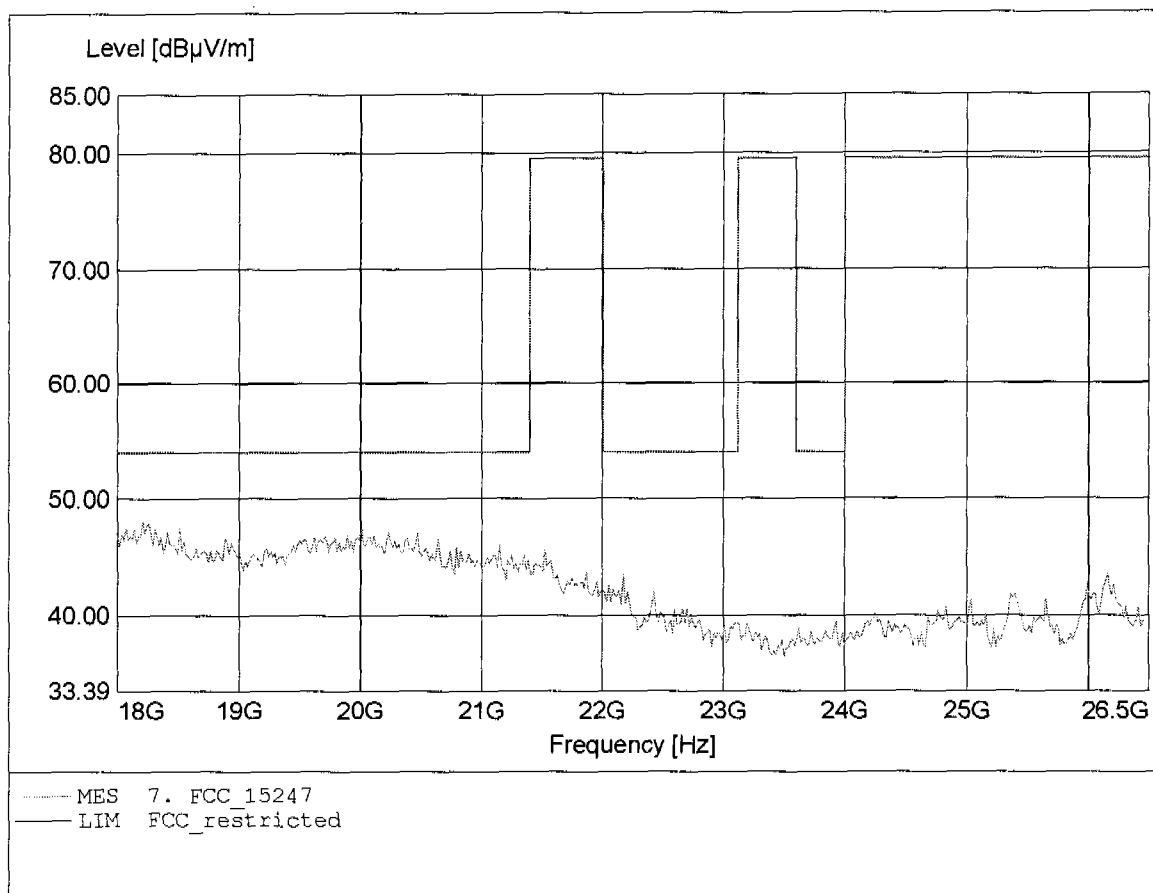

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

Applicant: GN Netcom
EUT: Nokia Wireless Headset HS-37W
Model: Nokia HS-37W 2480 MHz
Temperature/ Voltage: Temp.: 23°C, Unom.: 1.20 VDC
Test Site / Operator: ETS / Mr. Handrik
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.119GHz, Emax: 47.28dBμV/m, RBW: 1MHz

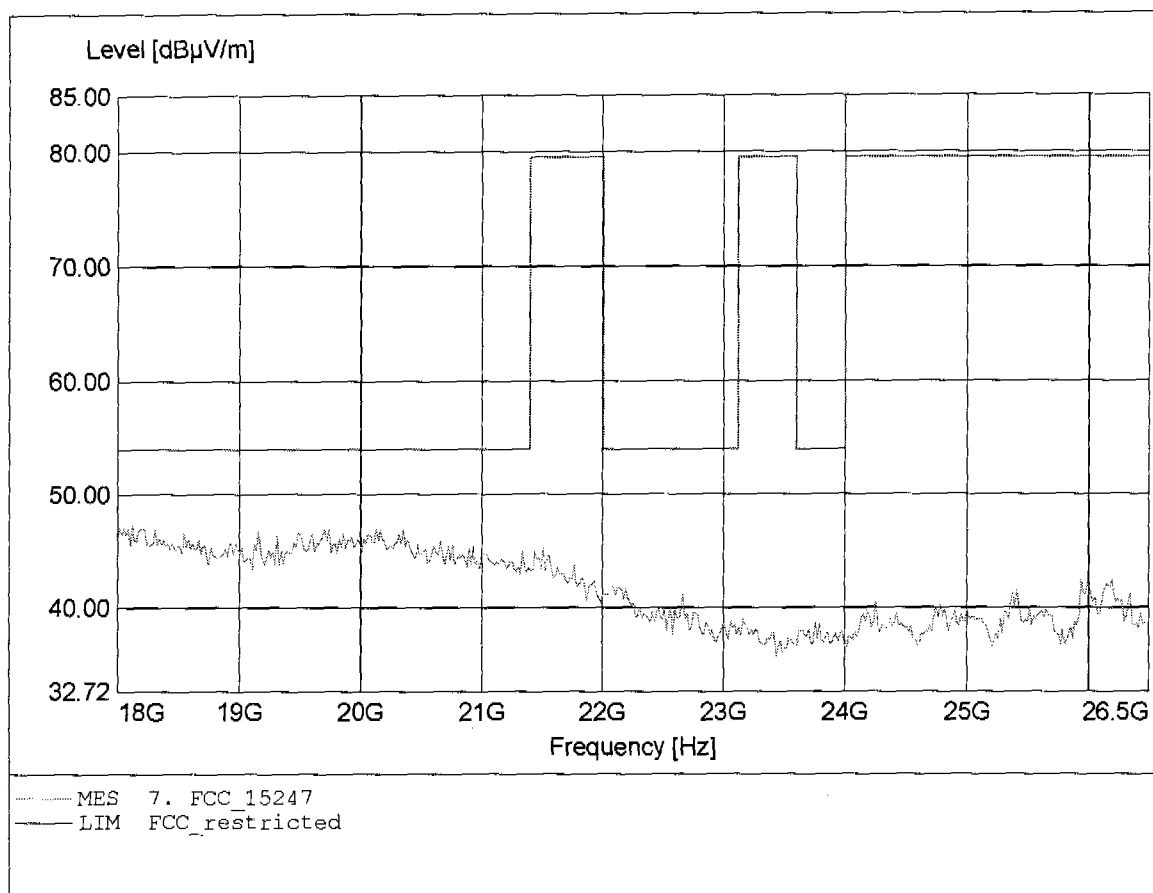

Appendix D


Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl -0.01 dB VBW 100 kHz
10 dBm 1.00080160 MHz SWT 5 ms Unit dBm

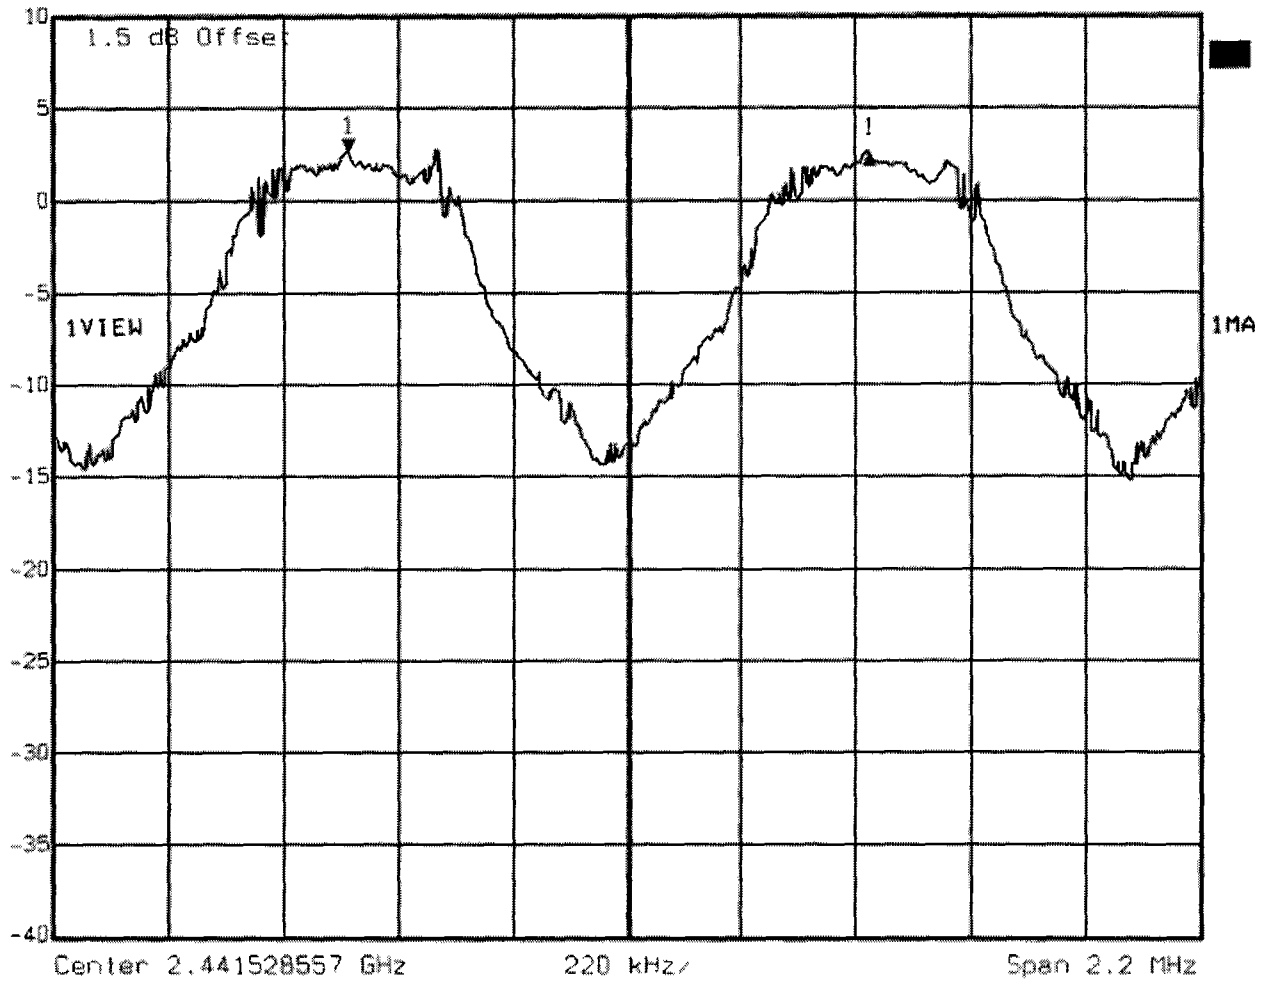

Title: Carrier Frequency Separation
Comment A: Nokia H5-37W
Date: 23.FEB.2005 15:04:15


Appendix F

Number of Hopping Frequencies



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

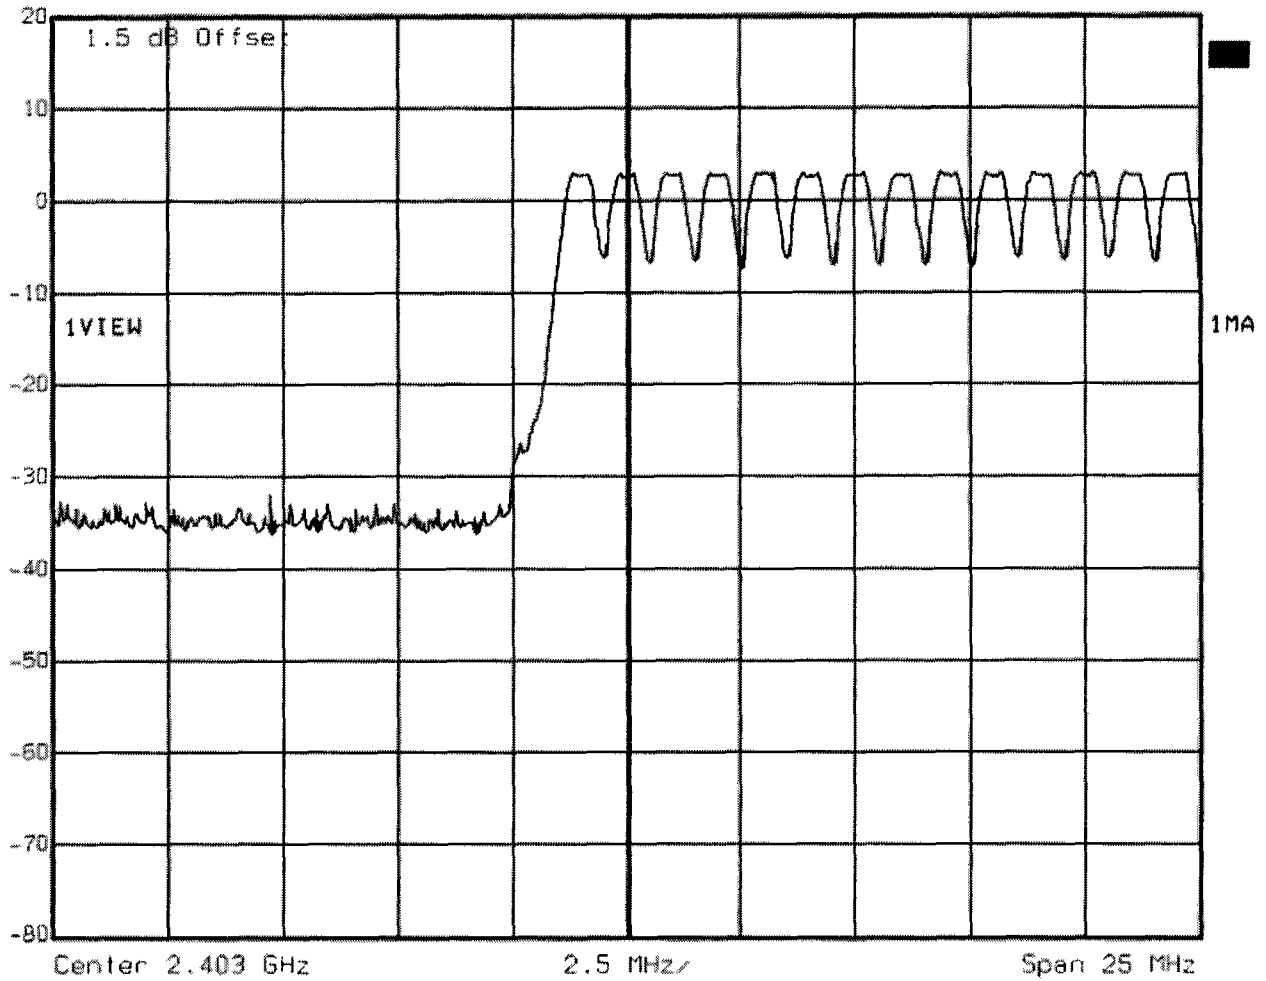


Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: Nokia HS-37W
Date: 23.FEB.2005 15:06:51



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

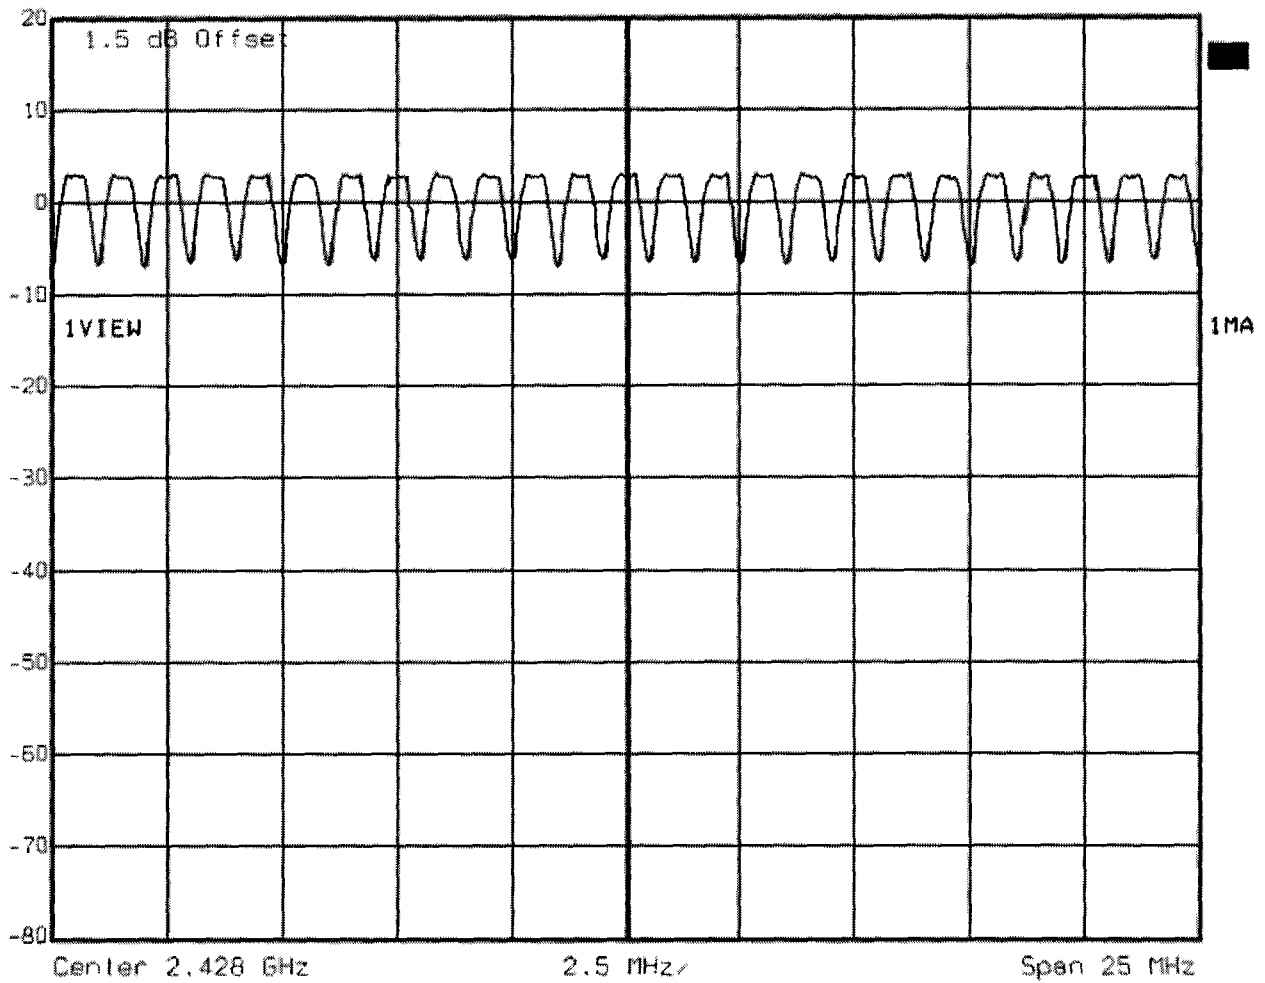


Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: Nokia HS-37W
Date: 23.FEB.2005 15:08:30



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

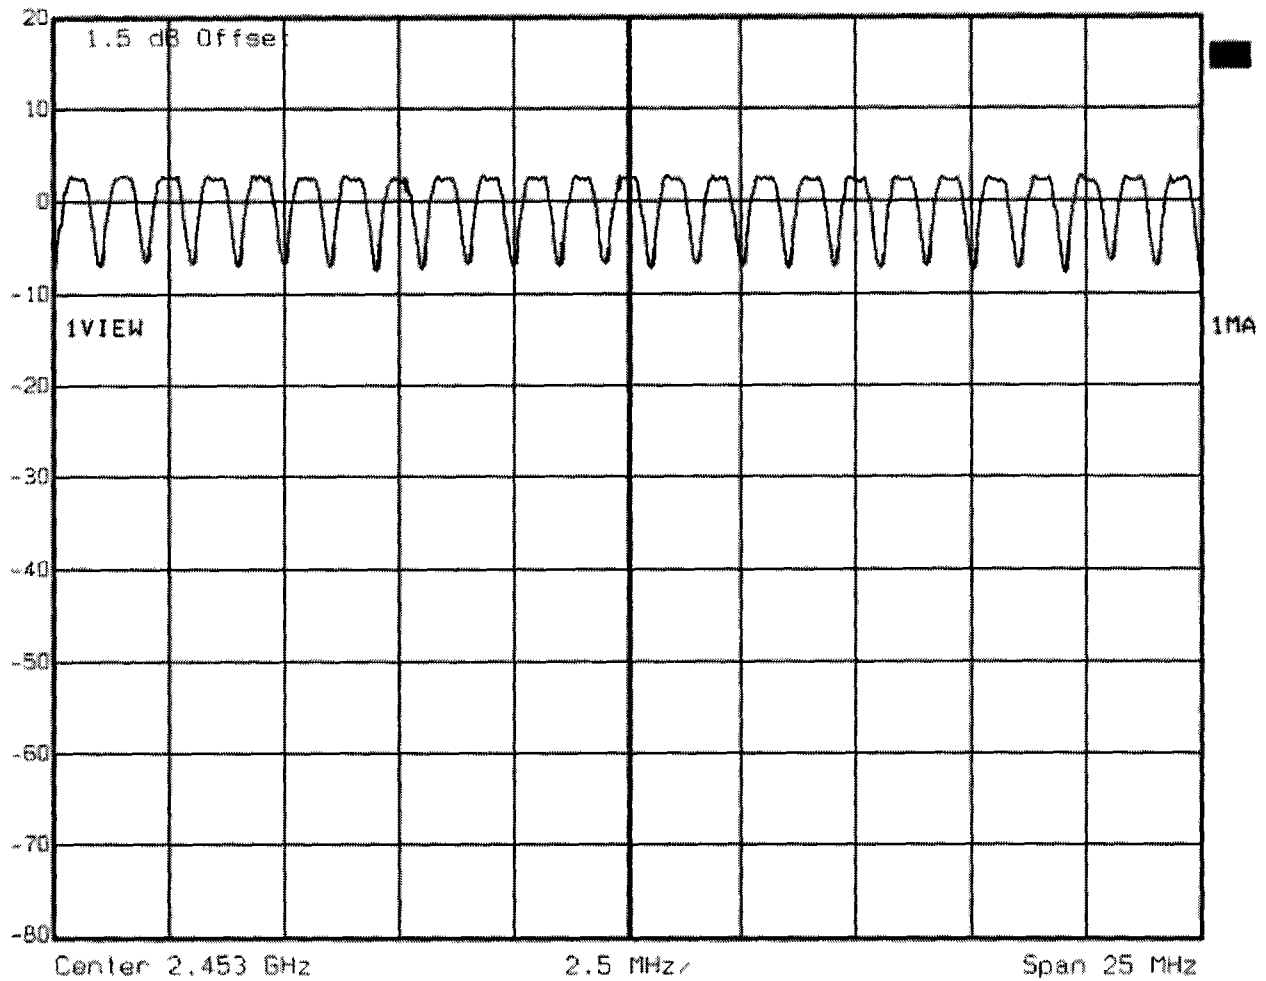


Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: Nokia HS-37W
Date: 23.FEB.2005 15:10:15



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

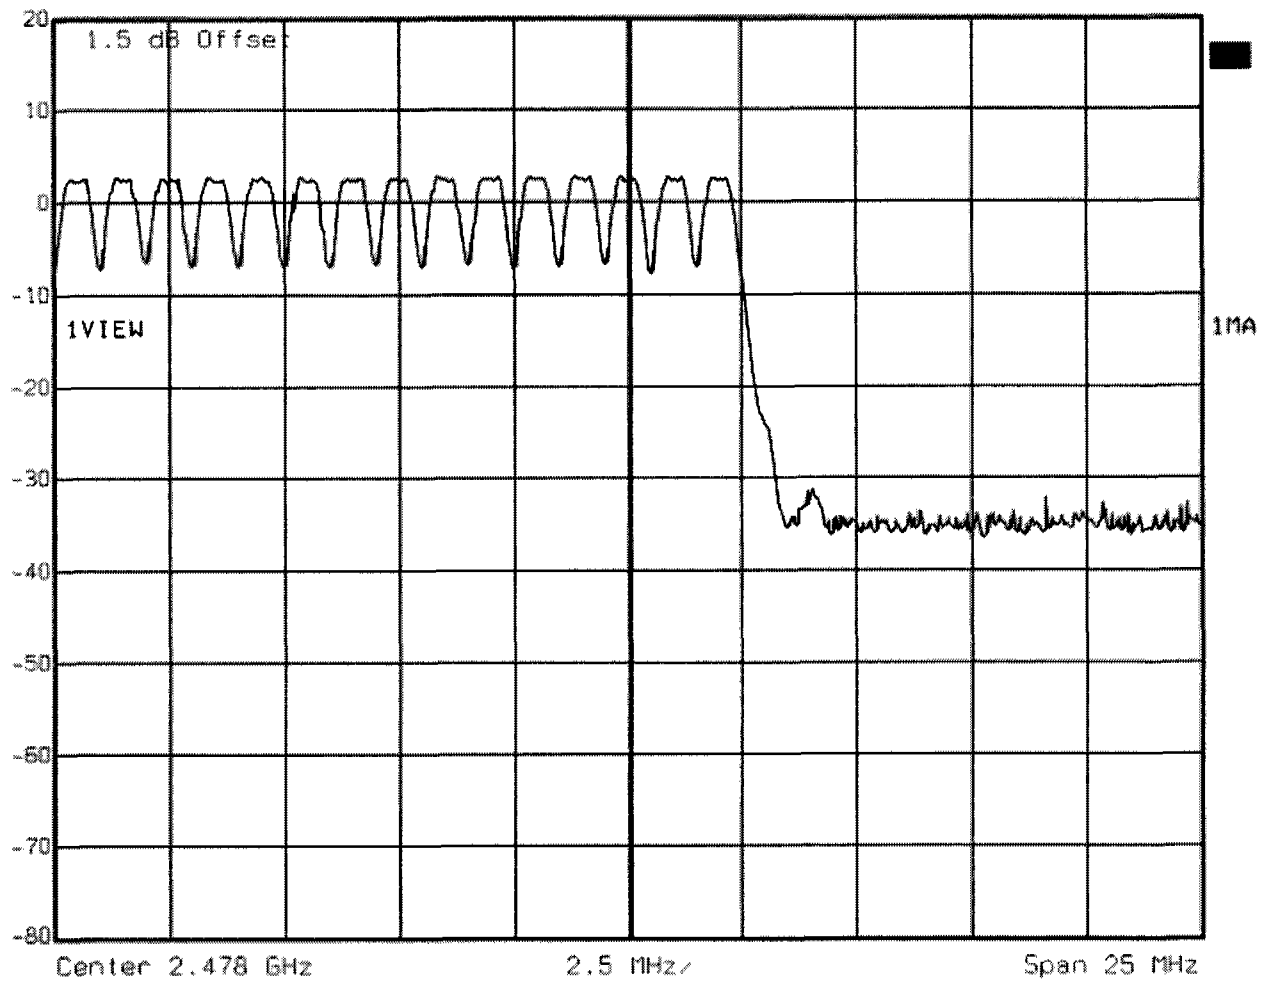


Title: Number of Hopping Frequencies Ch.: 64-70
Comment A: Nokia HS-37W
Date: 23.FEB.2005 15:11:57



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

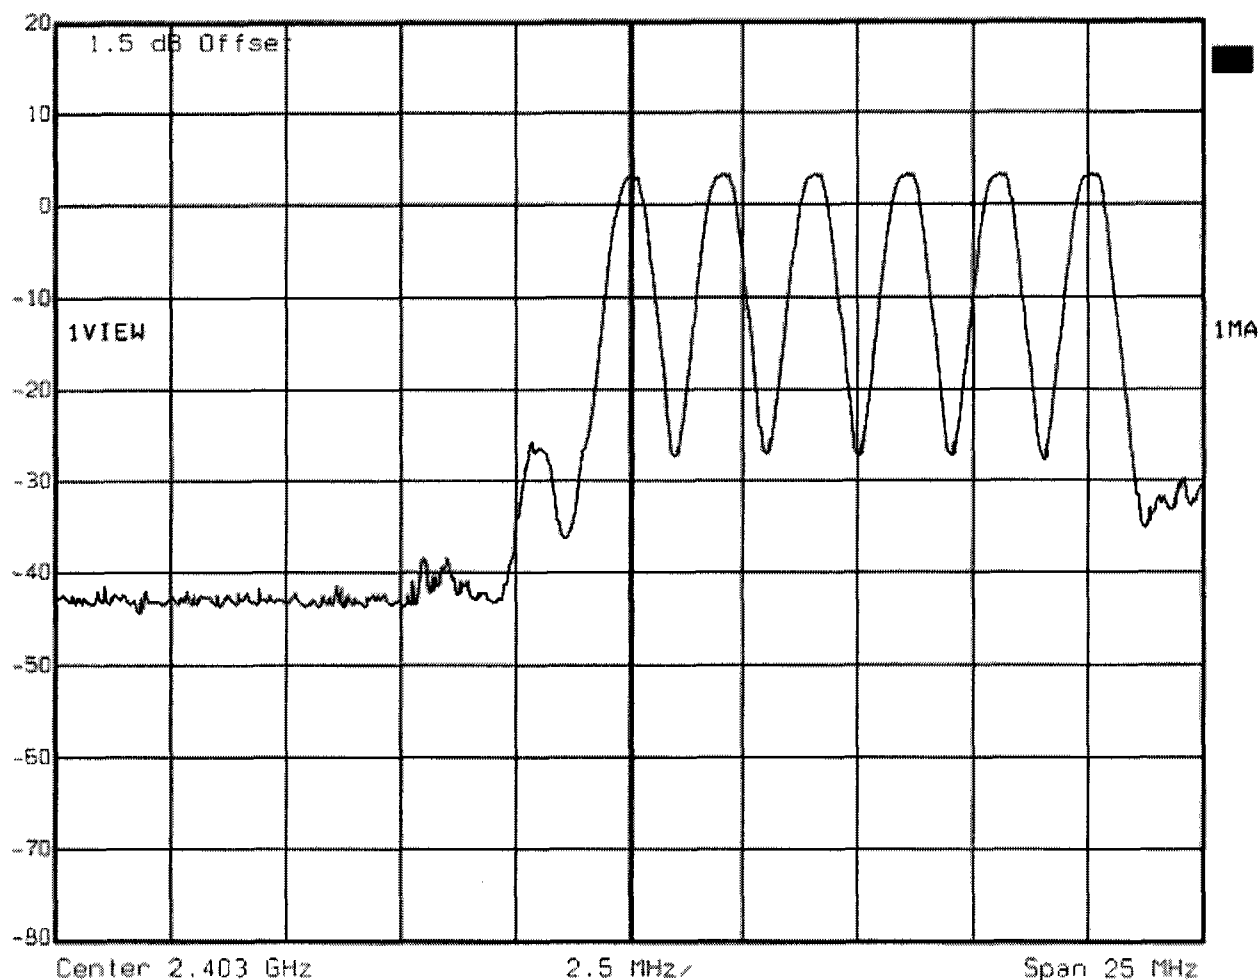


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Nokia HS-37W
Date: 25.FEB.2005 06:51:30



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

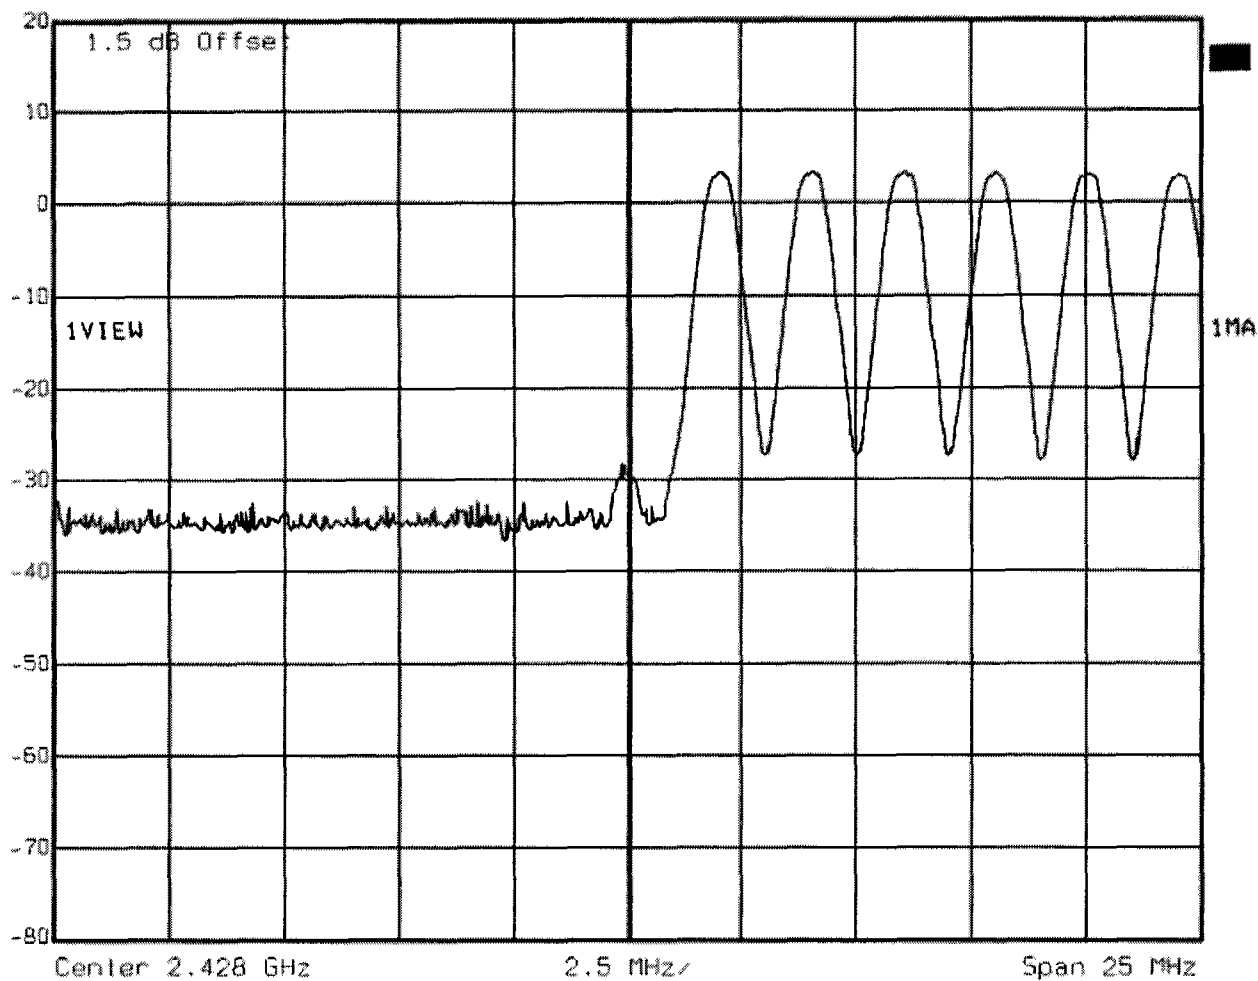


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Nokia HS-37W
Date: 25.FEB.2005 06:54:37



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SMT 5 ms Unit dBm

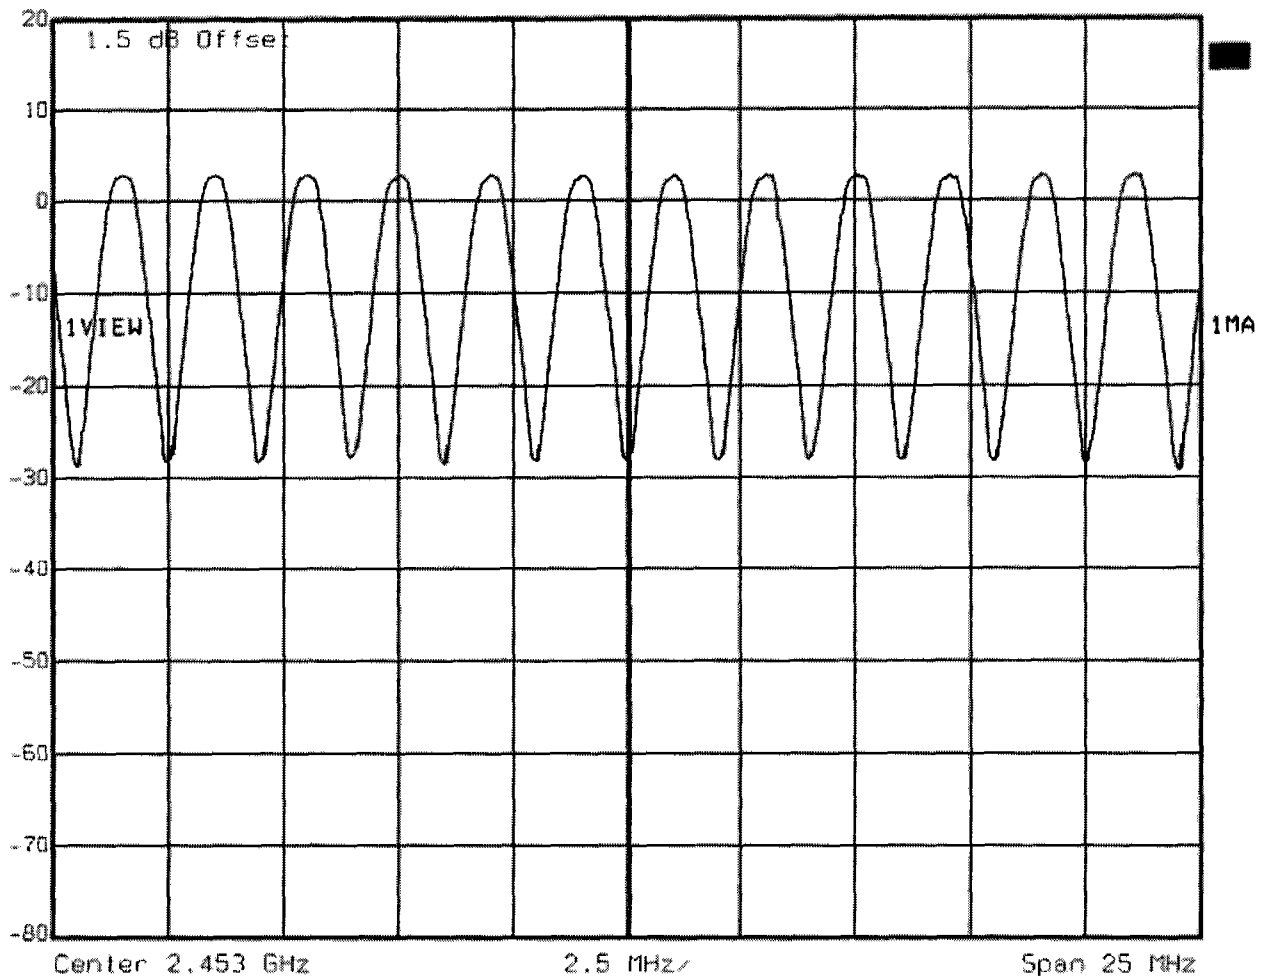


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Nokia HS-37W
Date: 25.FEB.2005 06:58:44



Ref Lvl
20 dBm

RBW 300 kHz RF Att 40 dB
VBW 300 kHz
SWT 5 ms Unit dBm

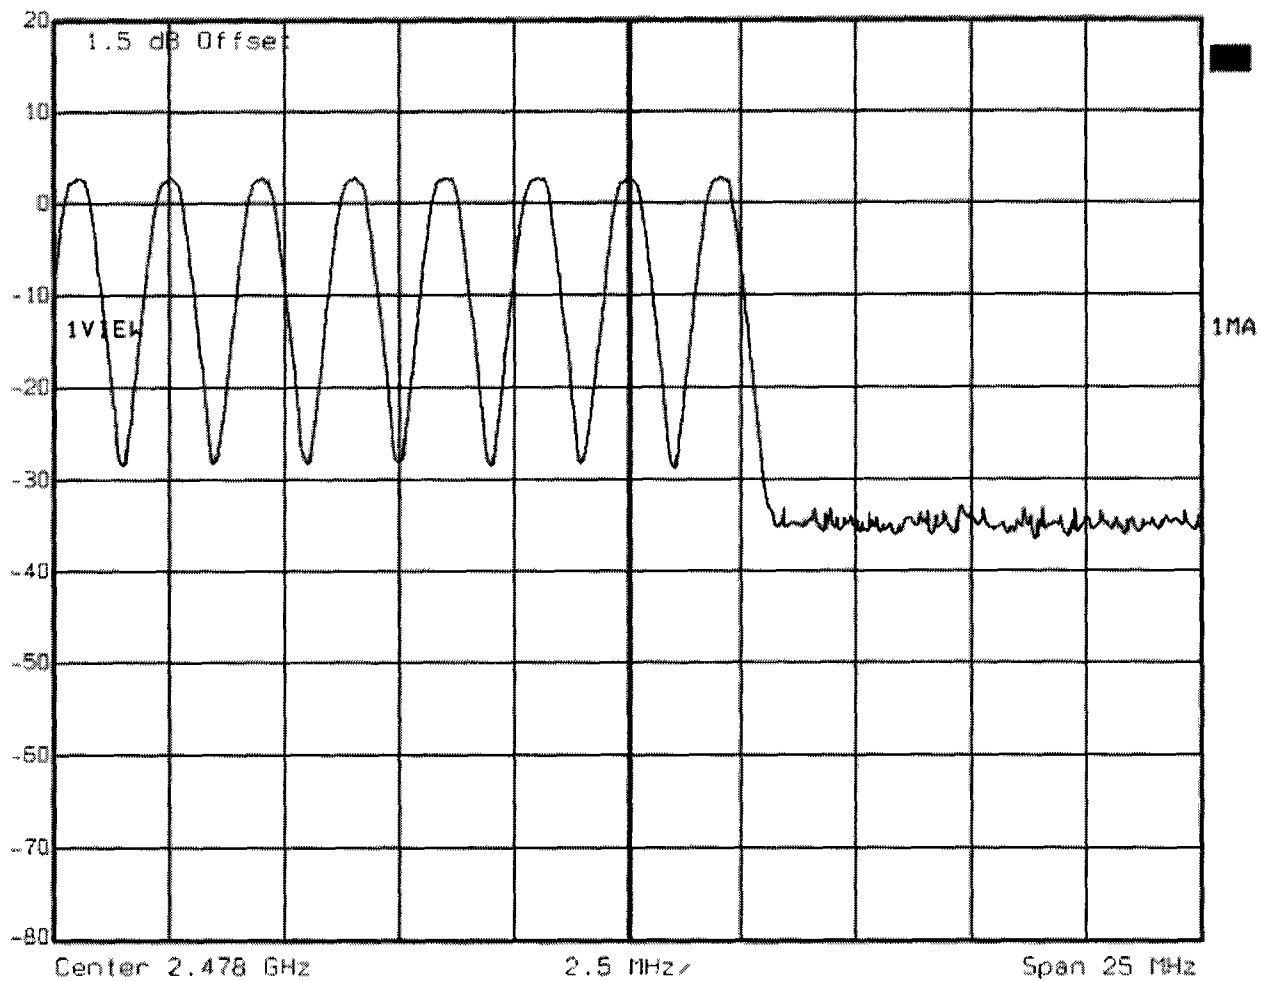


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: Nokia HS-37W
Date: 25.FEB.2005 07:08:34

Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1]
Ref Lvl 10 dBm
-0.17 dB
2.915832 ms
RBW 1 MHz
VBW 1 MHz
SWT 5 ms
RF Att 20 dB
Unit dBm

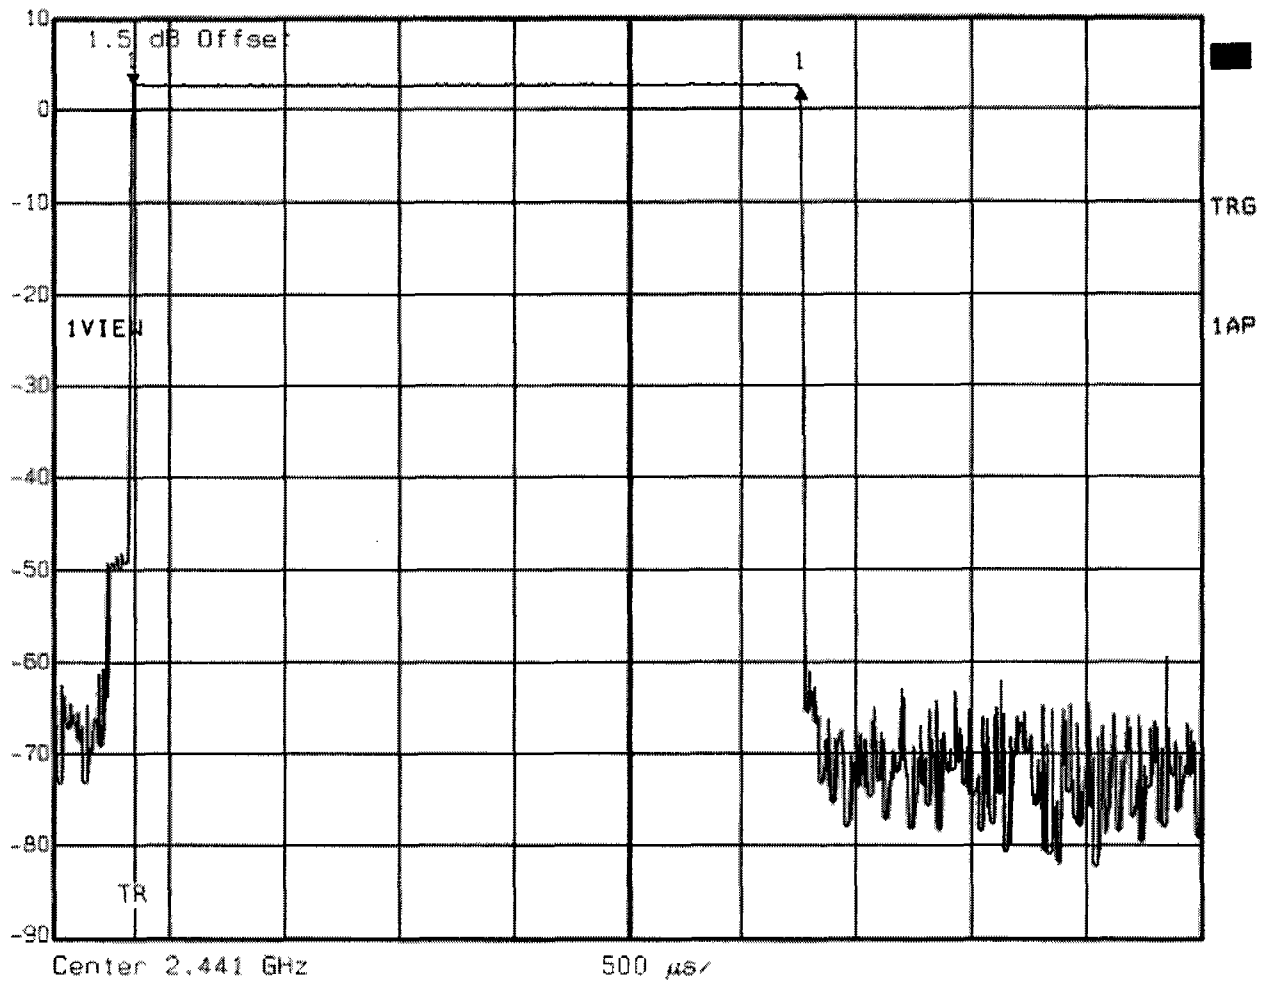

Title: Time of occupancy (Hopping DHS) 64 events * 2.916ms=186.52ms
Comment A: Nokia H5-37W
Date: 23.FEB.2005 15:20:10




Delta 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 0.89 dB VBW 1 MHz
10 dBm 120.440882 μ s SWT 300 μ s Unit dBm

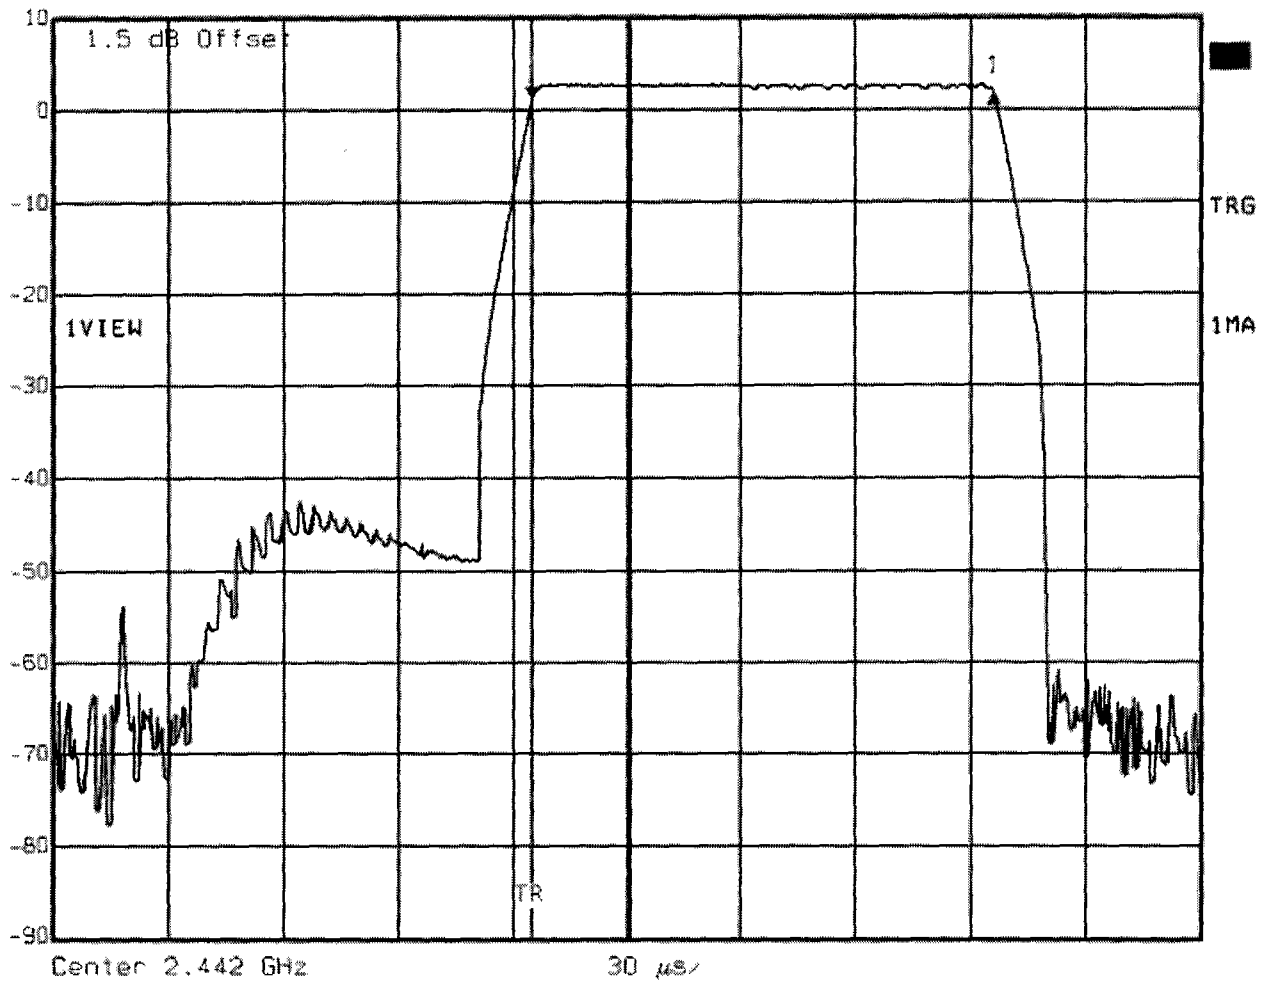

Title: Time of occupancy (Inquiry) 539 events * 0.120441ms=64.92ms
Comment A: Nokia HS-37W
Date: 25.FEB.2005 08:17:37



Delta 2 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl -0.01 dB VBW 1 MHz
30 dBm 6.260521 ms SWT 11 ms Unit dBm

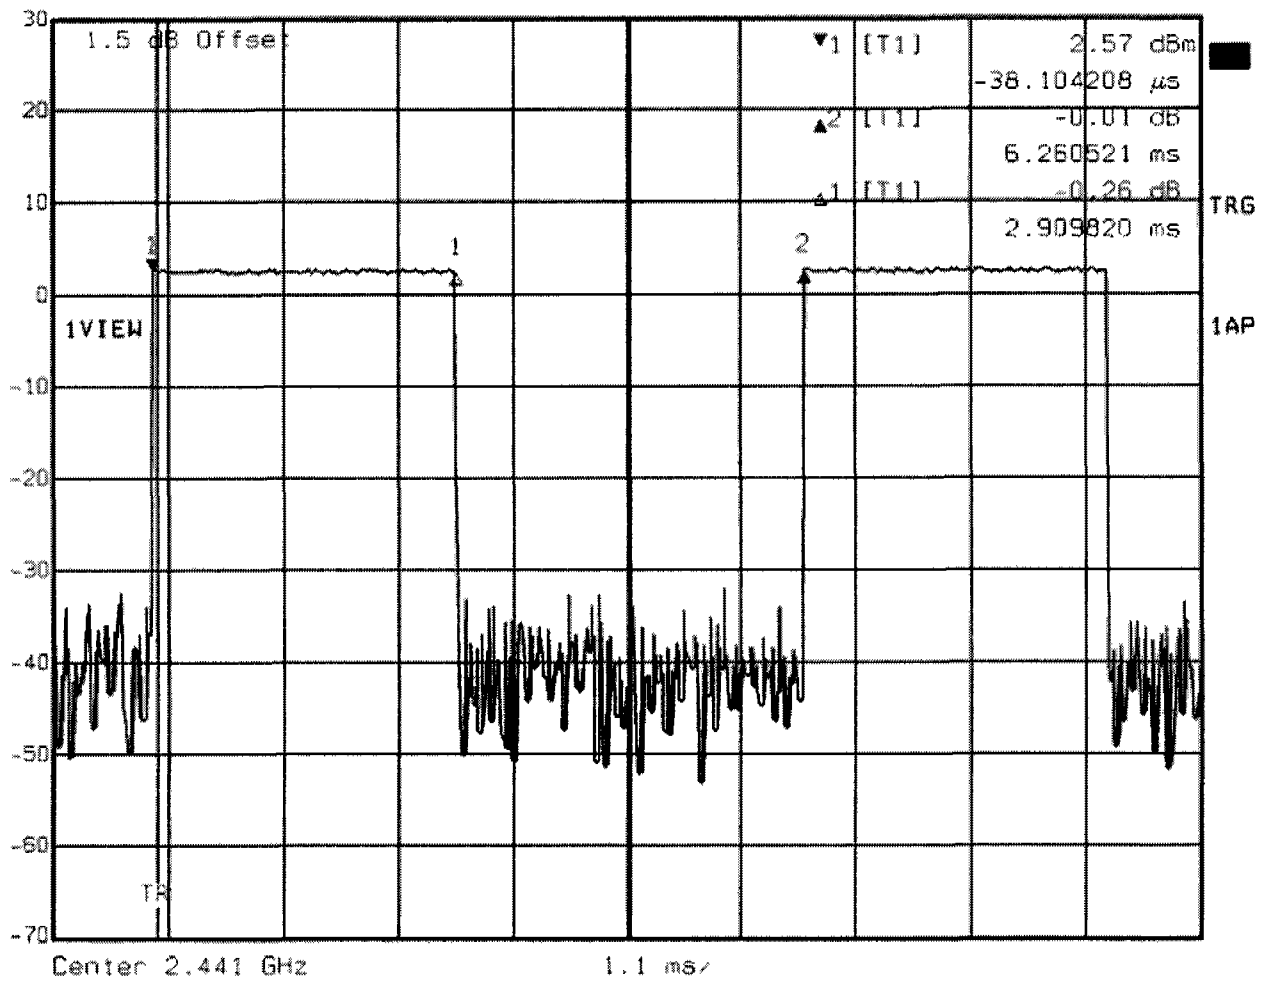


Title: Duty Cycle
Comment A: Nokia HS-37W
Date: 23.FEB.2005 14:48:18

Appendix H

20dB Bandwidth




Delta 1 [T1]
Ref Lvl 10 dBm
-0.50 dB
877.35470942 kHz
RBW 10 kHz
VSW 10 kHz
SWT 56 ms
RF Att 30 dB
Unit dBm

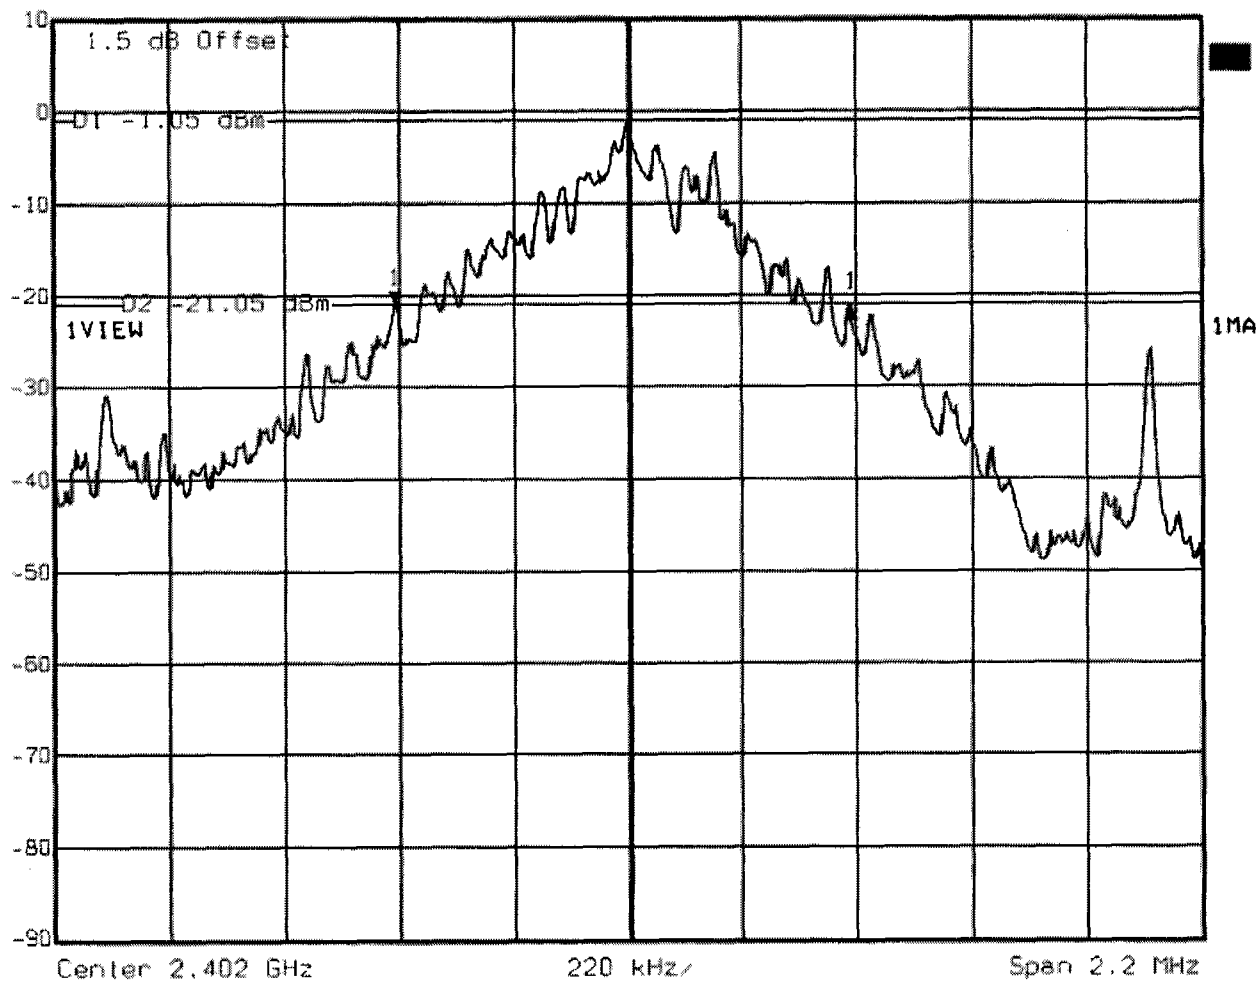

Title: -20 dB Bandwidth Ch.: 0
Comment A: Nokia HS-37W
Date: 23.FEB.2005 14:35:39




Delta 1 [T1]
Ref Lvl 0.55 dB
10 dBm
RBW 10 kHz
VBW 10 kHz
SWT 56 ms
RF Att 30 dB
Unit dBm

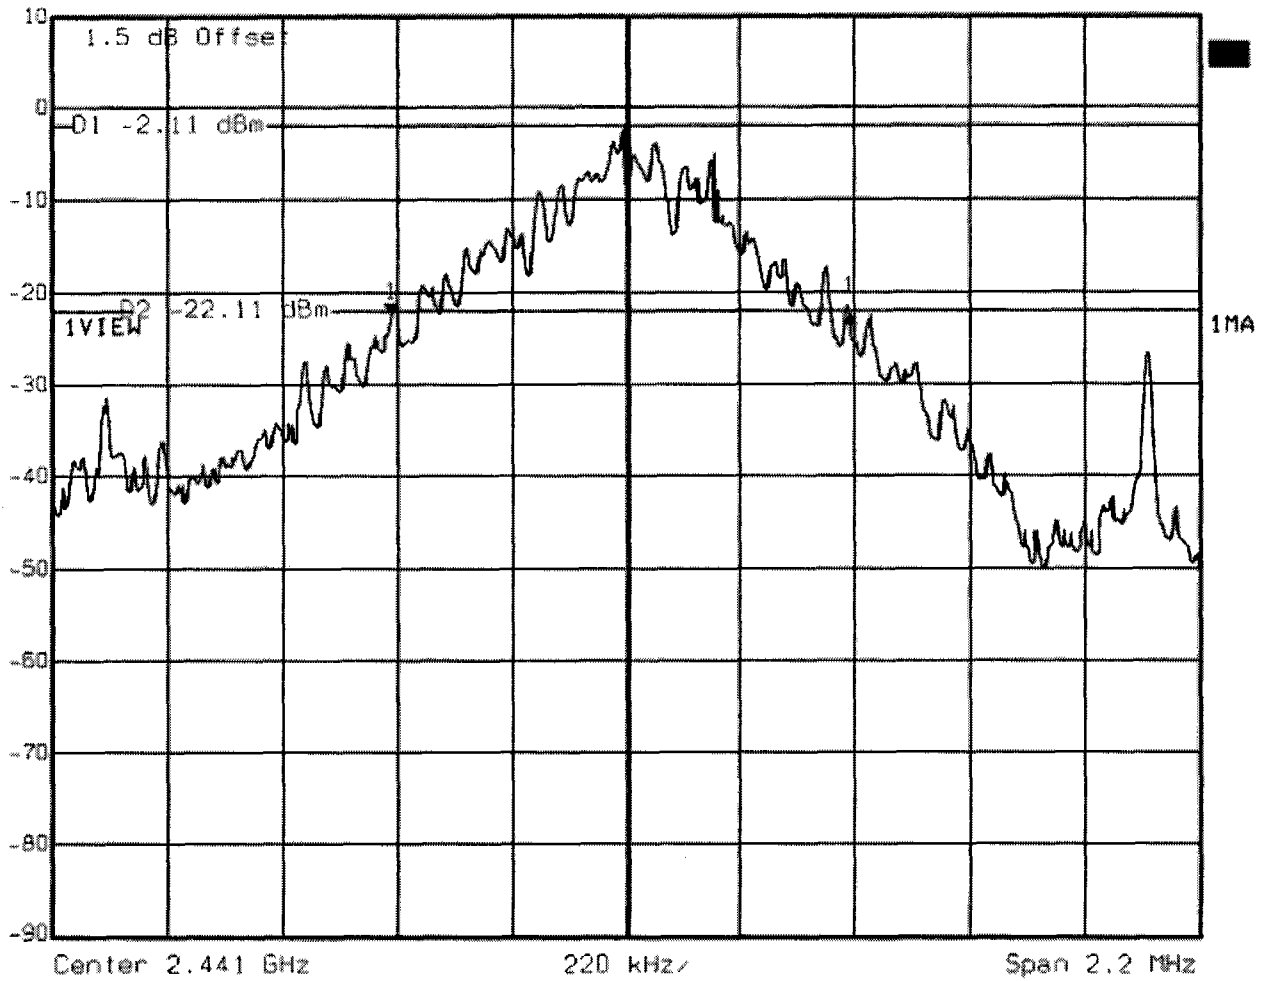

Title: -20 dB Bandwidth Ch.: 39
Comment A: Nokia HS-37W
Date: 23.FEB.2005 14:36:50



Delta 1 [T1]
Ref Lvl 10 dBm
-0.72 dB
877.35470942 kHz
RBW 10 kHz
VBW 10 kHz
SMT 56 ms
RF Att 30 dB
Unit dBm

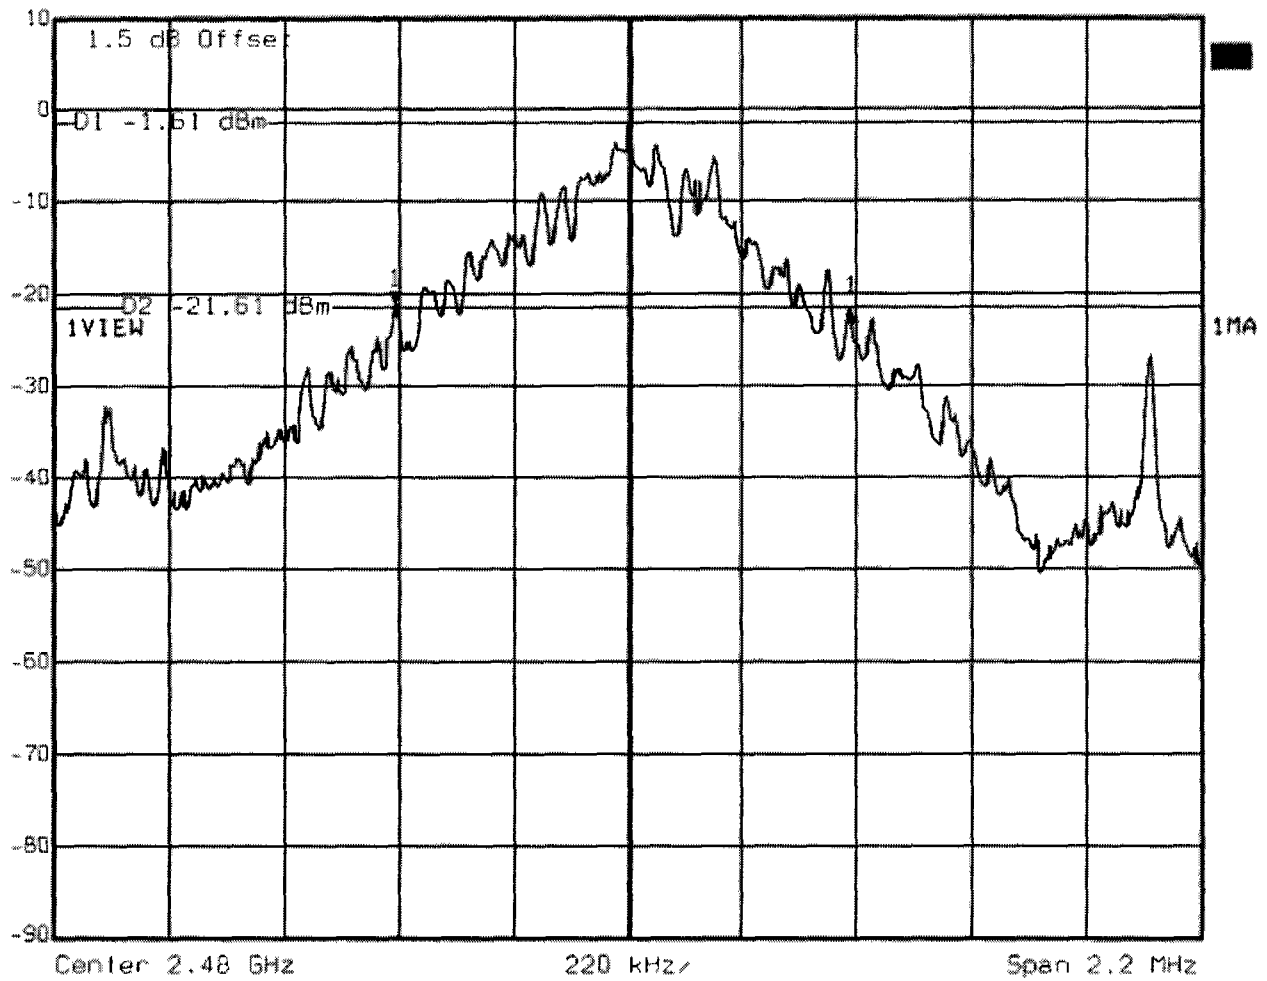


Title: -20 dB Bandwidth Ch.: 78
Comment A: Nokia H5-37W
Date: 23.FEB.2005 14:37:56

Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 42.54 dB VBW 50 kHz
20 dBm 2.49829659 MHz SWT 5 ms Unit dBm

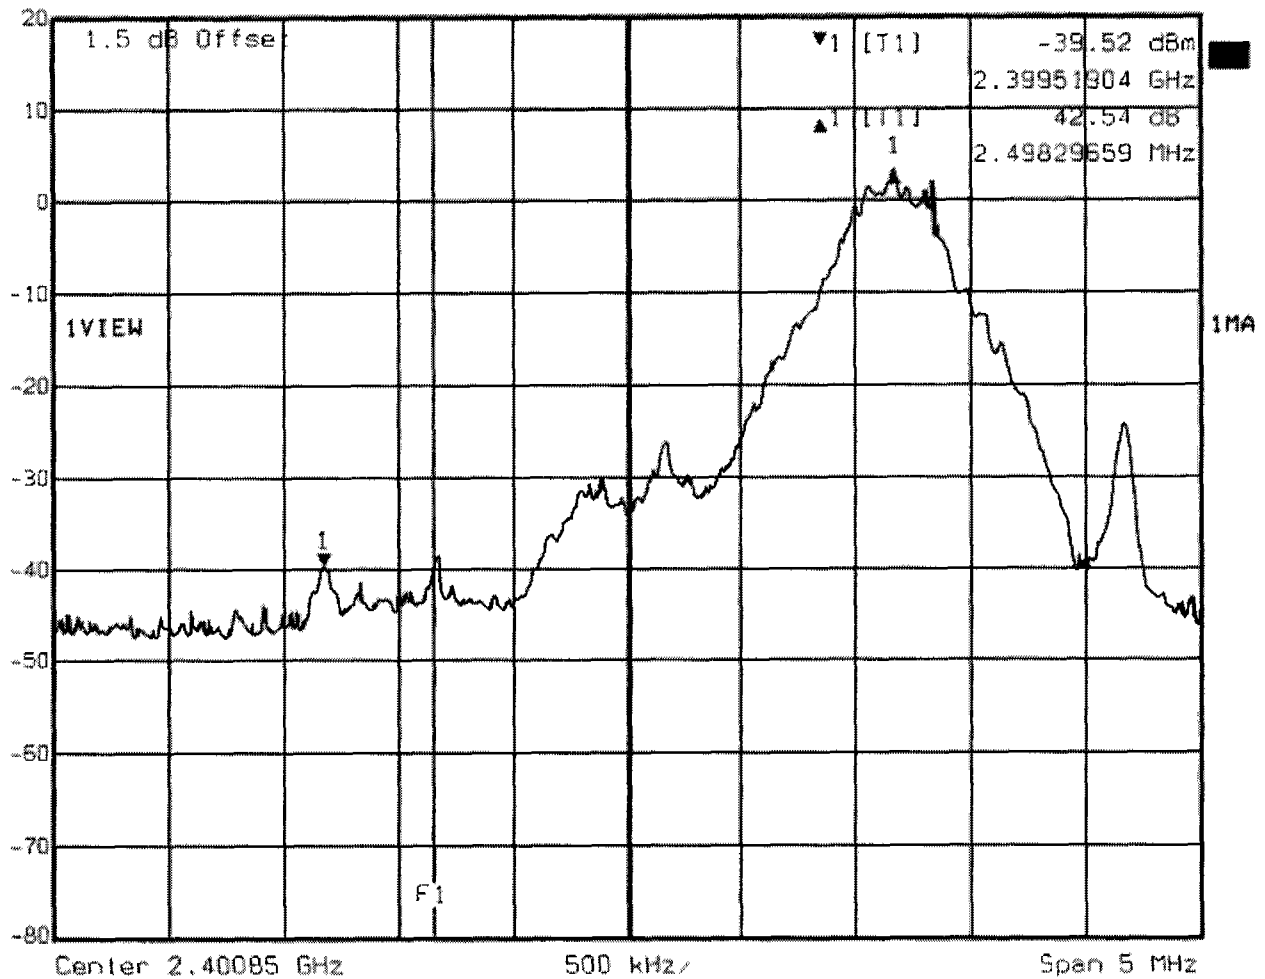

Title: Band-edge Compliance (conducted, single frequency)
Comment A: Nokia HS-37W
Date: 23.FEB.2005 14:42:29



Delta 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 39.84 dB VBW 50 kHz
20 dBm -3.48745491 MHz SWT 5 ms Unit dBm

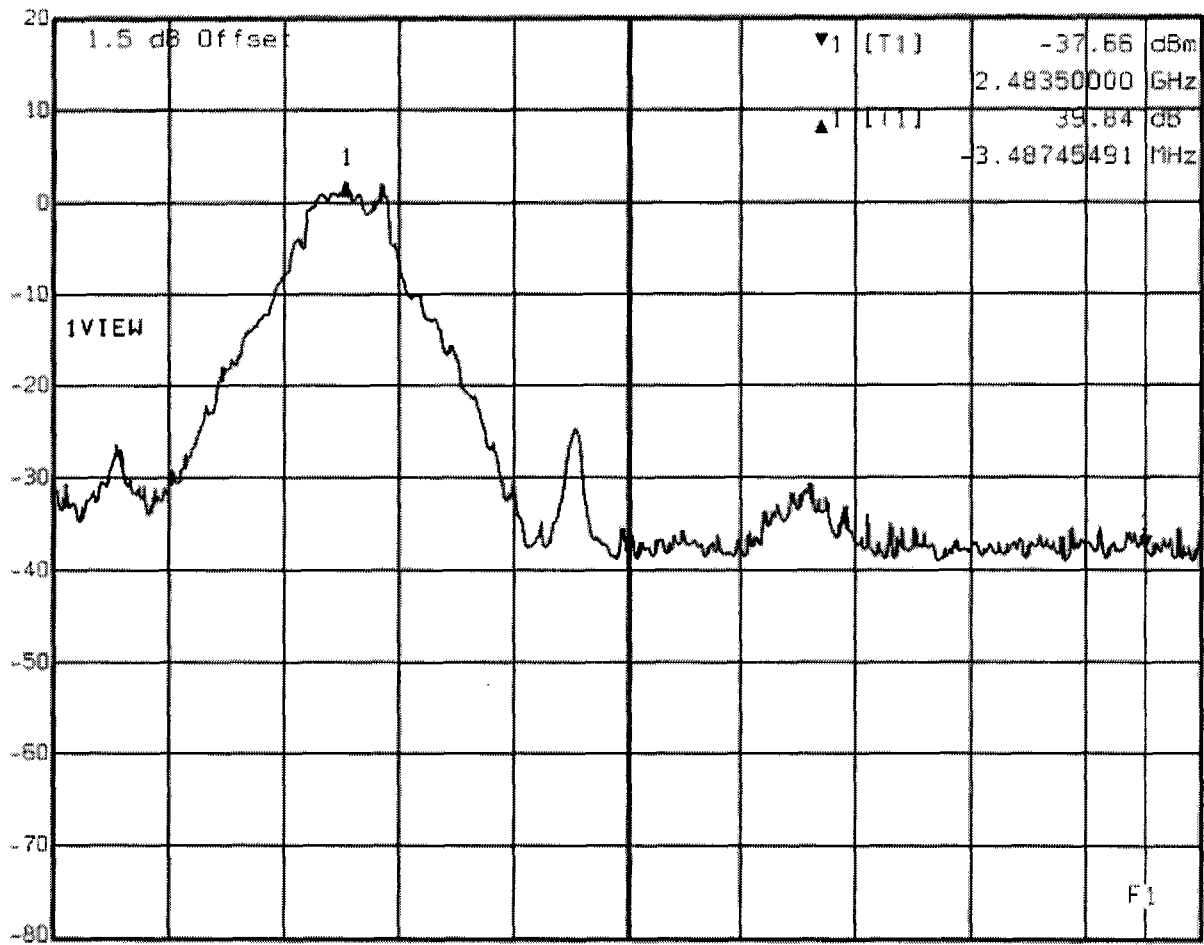


Center 2.48124 GHz 500 kHz Span 5 MHz

Title: Band-edge Compliance (conducted, single frequency)
Comment A: Nokia HS-37W
Date: 23.FEB.2005 14:41:20




Della 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 43.10 dB VBW 50 kHz
20 dBm 2.48396794 MHz SWT 5 ms Unit dBm

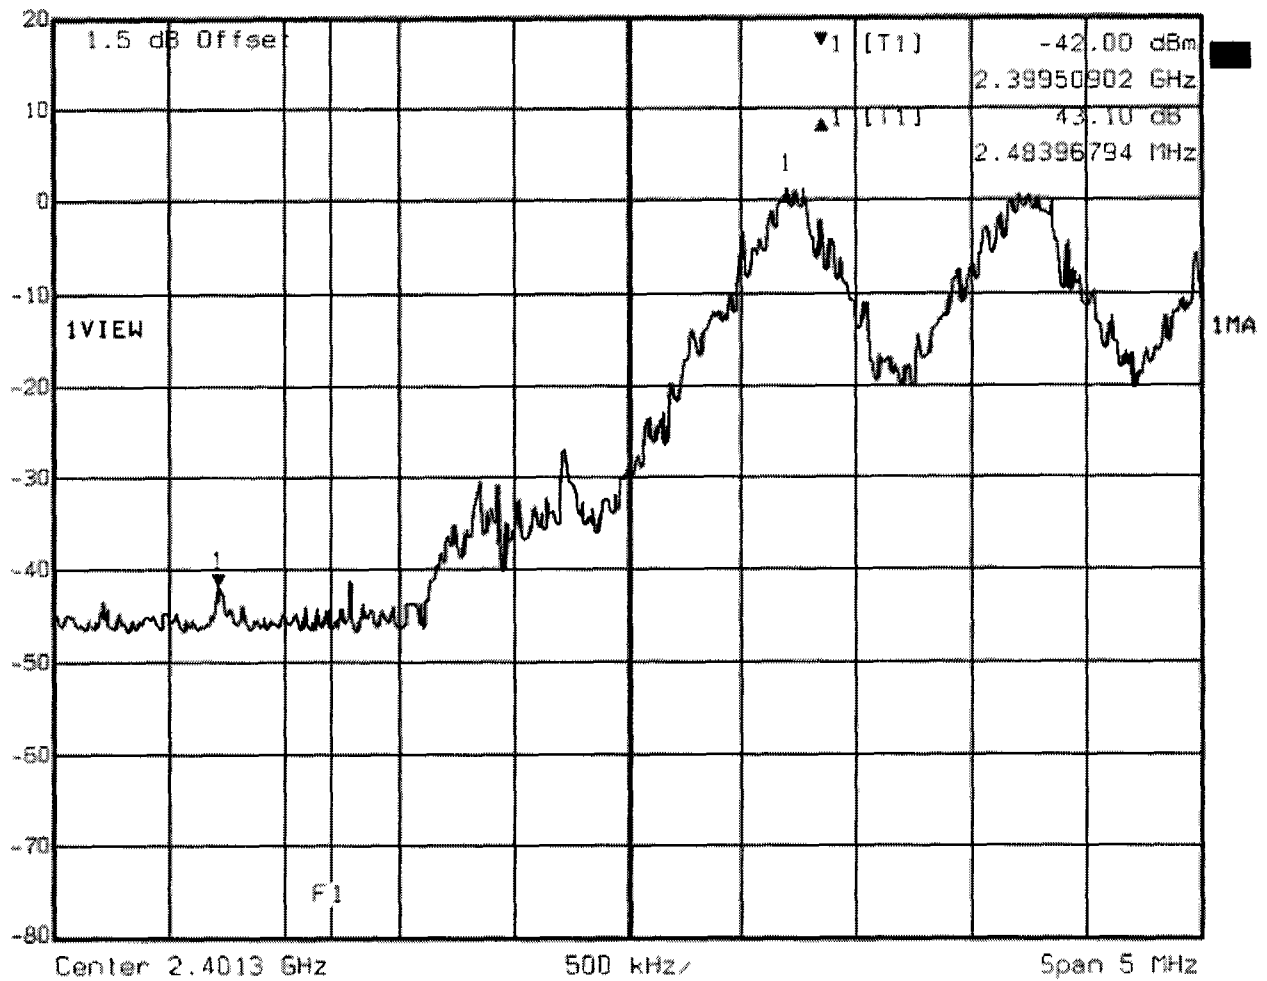

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Nokia HS-37W
Date: 23.FEB.2005 14:51:51



Della 1 [T1] RBW 50 kHz RF Att 40 dB
Ref Lvl 39.68 dB VBW 50 kHz
20 dBm -3.49747495 MHz SWT 5 ms Unit dBm

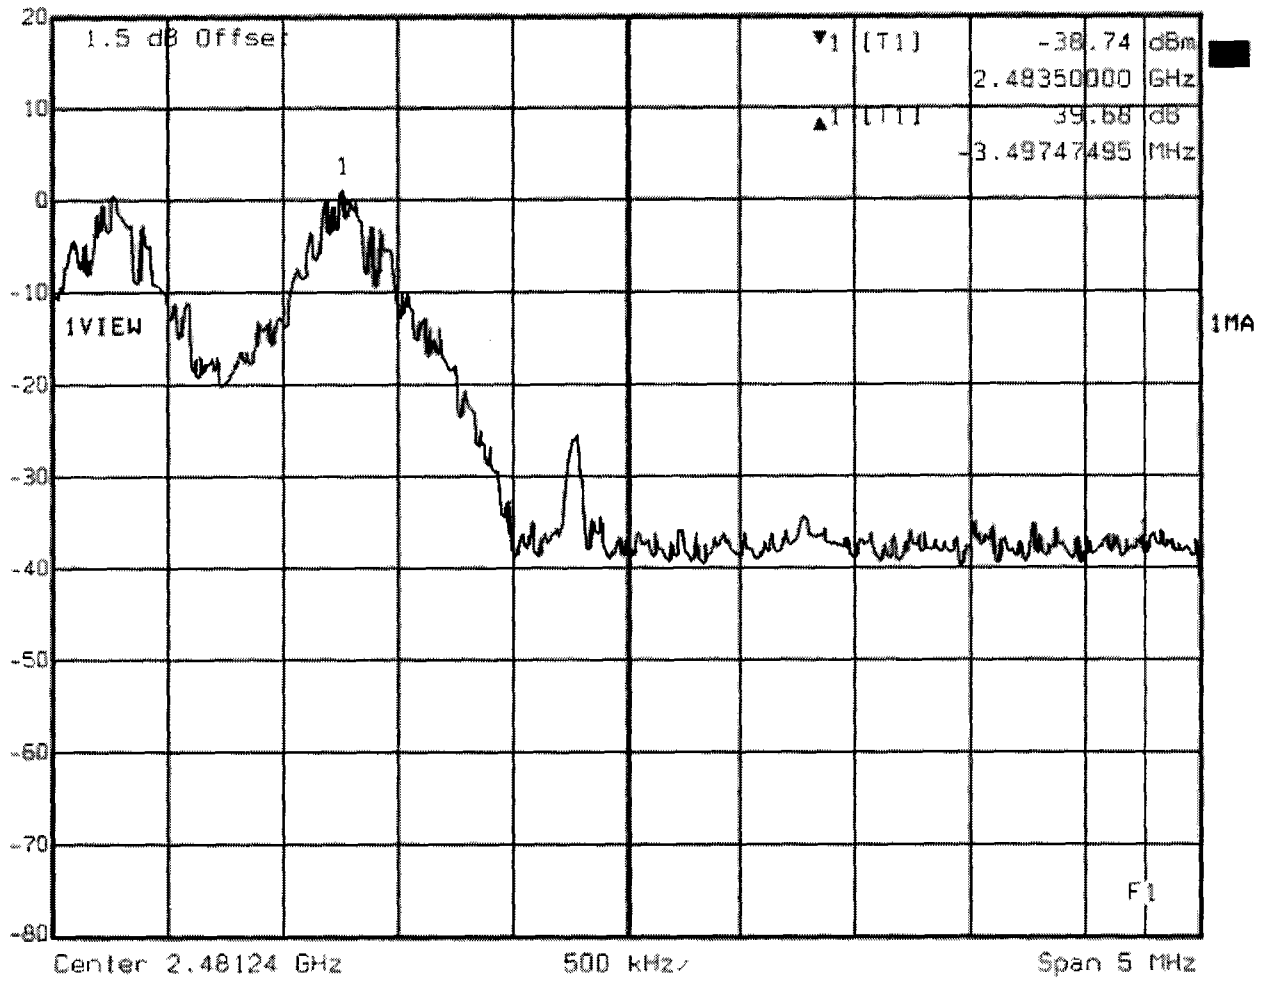

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: Nokia HS-37W
Date: 23.FEB.2005 14:54:12

Appendix J

Conducted Measurement at (AC) Power Line