

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CBT_RM-1045_04.docx	Date of Report:	05-May-2014
Number of pages:	42	Customer's Contact person:	Tia Melava
Testing laboratory:	TCC Nokia Salo Laboratory P.O.Box(86) Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Customer:	Microsoft Mobile Oy P.O.Box(86) Joensuunkatu 7H FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220
FCC listing no.:	533467		
IC recognition no.:	661V-1		
Tested devices/ accessories:	Phone RM-1045 / AC-Charger AC-60E / Headset WH-208 / USB-Cable CA-190CD		
FCC ID:	PDNRM-1045	IC:	661R-RM1045
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jari Keto, Specialist, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	14-Apr-2014
Testing completed	23-Apr-2014
The customer's contact person	Tia Melava
Test Plan referred to	T:\Projects\RM-1045\TestPlan\RS_Testplan_RM-1045.xlsm
Notes	-
Document name	T:\Projects\RM-1045\EMC\FCC15CBT_RM-1045_04.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-1045	004402478600681	1004		02061.00037.14145.00001	18196
Headset	WH-208	2145W41	-	-	-	18198
AC-Charger	AC-60E	09049324161031071500675677	-	-	-	18197
Phone	RM-1045	004402478600756	1004	-	02061.00037.14145.00001	18216
AC-Charger	AC-60E	409049326161030412500675677	-	-	-	18217
Headset	WH-208	2145W41	-	-	-	18218
USB-Cable	CA-190CD	07304562136C28	-	-	-	18219

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8(0.4(2))	Conducted peak output power	PASSED
15.247(d), 15.205(b)	A8(0.5)	Band edge compliance of RF emissions	PASSED
15.247(d)	A8(0.5)	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8(0.5)	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	
15.247(a)(1)	A8(0.1(1))	20dB(bandwidth)	PASSED
15.247(a)(1)	A8(0.1(2))	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8(0.1(4))	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8(0.1(4))	Time of occupancy	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information.....	2
1.2. Summary of Test Results	2
2. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8(0.4(2))).....	5
2.1. Test Setup	5
2.2. Test method and limit	5
2.3. Bluetooth Test results	6
3. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8(0.5)).....	9
3.1. Test Setup	9
3.2. Test method and limit	9
3.3. Bluetooth Test results	10
4. 20dB(bandwidth) (FCC §15.247(a)(1), RSS-210 A8(0.1(1)))	13
4.1. Test Setup	13
4.2. Test method and limit	13
4.3. Bluetooth Test results	14
5. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8(0.1(2)))	18
5.1. Test Setup	18
5.2. Test method and limit	18
5.3. Bluetooth Test results	19
6. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8(0.1(4))).....	21
6.1. Test Setup	21
6.2. Test method and limit	21
6.3. Bluetooth Test results	22
7. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8(0.1(4))).....	24
7.1. Test Setup	24
7.2. Test method and limit	24
7.3. Bluetooth Test results	25
8. Band edge compliance of RF emissions (FCC 15.247(d), 15.205(b), RSS-210 A8(0.5))	27
8.2. Test method and limit	27

8.3.	Bluetooth test results	28
9.	Radiated emissions	
	(FCC 15.247(d), 15.209, RSS-210, A8(0.5)).....	36
9.2.	Test method and limit	36
9.3.	Bluetooth test results	38
10.	Test Equipment	41
10.1.	Conducted measurements	41
10.2.	Radiated measurements	41

2. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8(0.4(2)))

EUT with DUT number	RM-1045, DUT 18196
Accessories with DUT numbers	AC-60E, DUT 18197 ; WH-208, DUT 18198
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 39 / 102.9
Date of measurements	15-Apr-2014
Measured by	Jari Keto

2.1. Test Setup

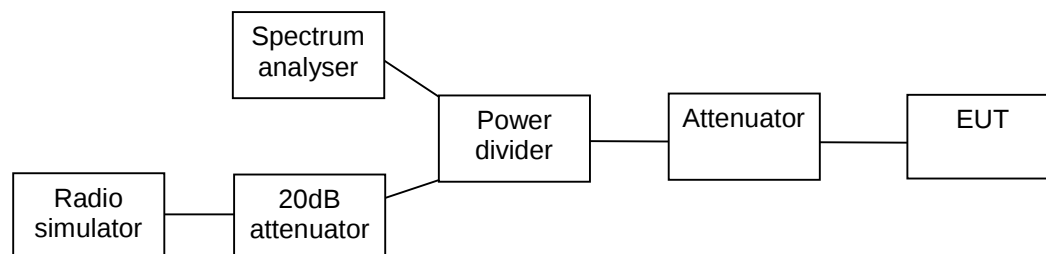

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5 5725 - 5850	≤ 1	≤ 30

2.3. Bluetooth Test results


2.3.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	9	7.943	PASSED
40 / 2442	9.53	8.974	PASSED
78 / 2480	7.02	5.035	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

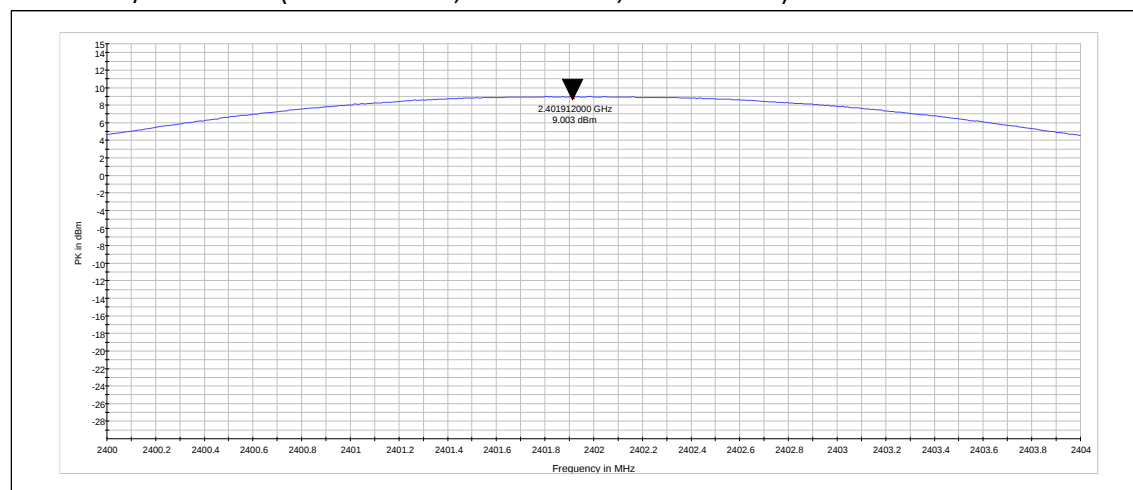

Channel 40 / 2442 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

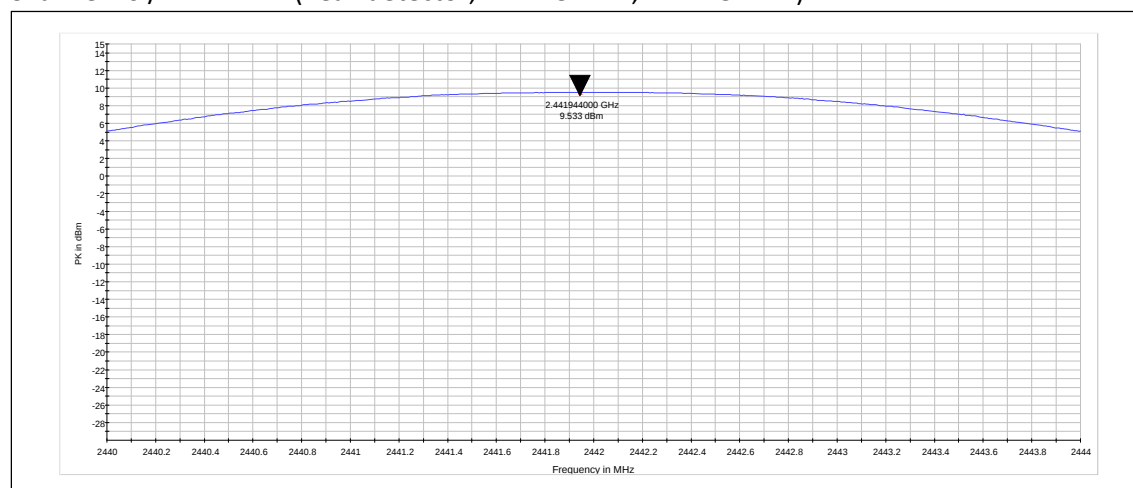


Channel 78 / 2480 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

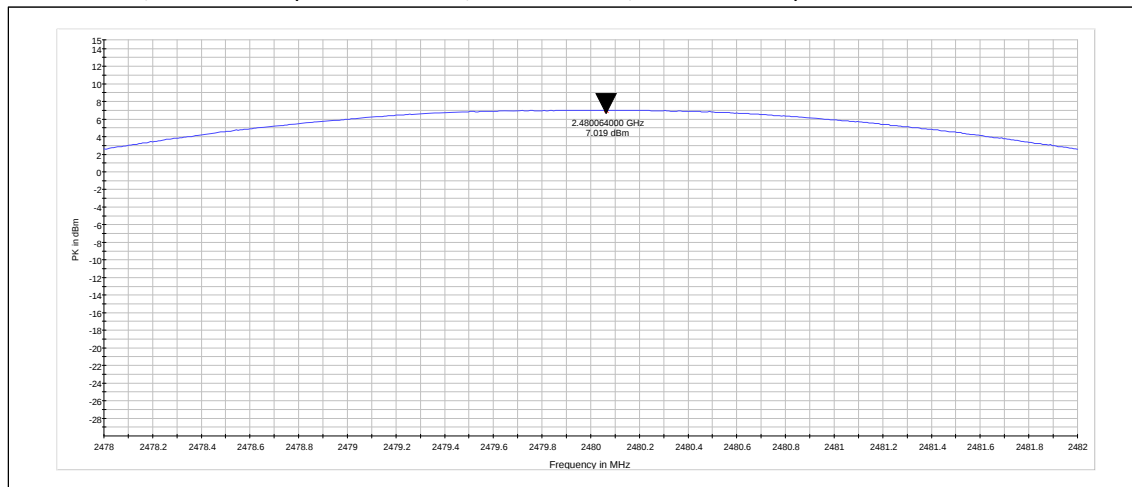


2.3.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	10.28	10.666	PASSED
40 / 2442	10.77	11.94	PASSED
78 / 2480	8.31	6.776	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

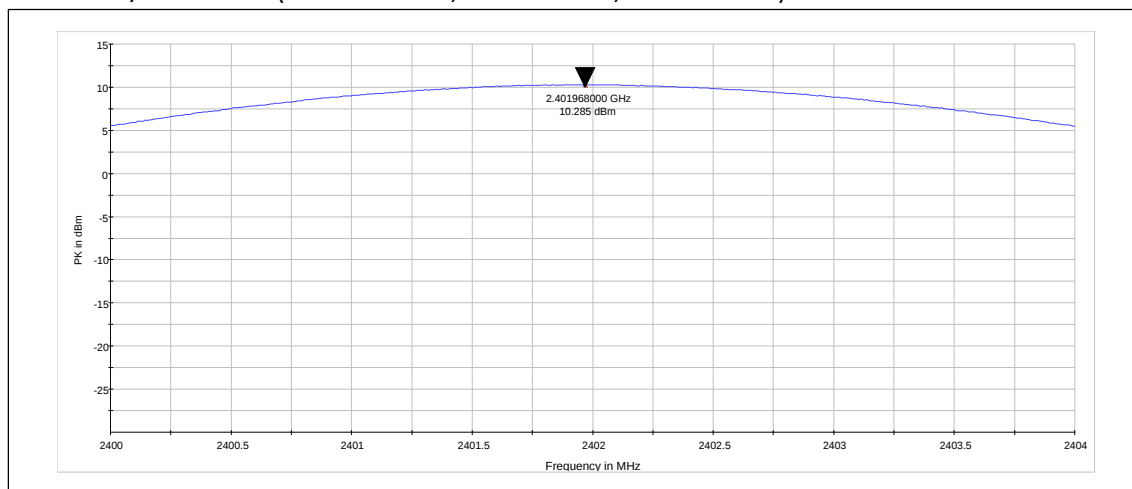

Channel 40 / 2442 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

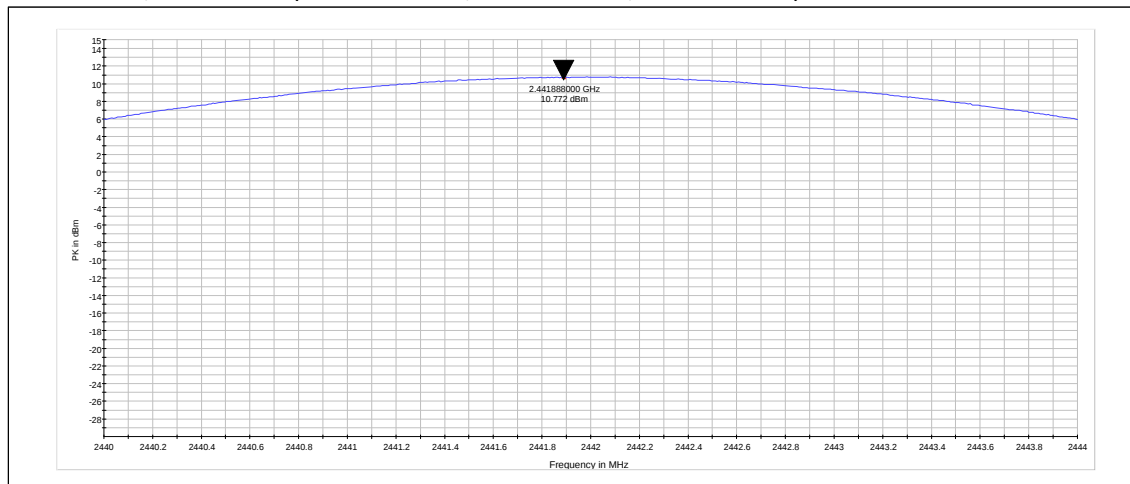


Channel 78 / 2480 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

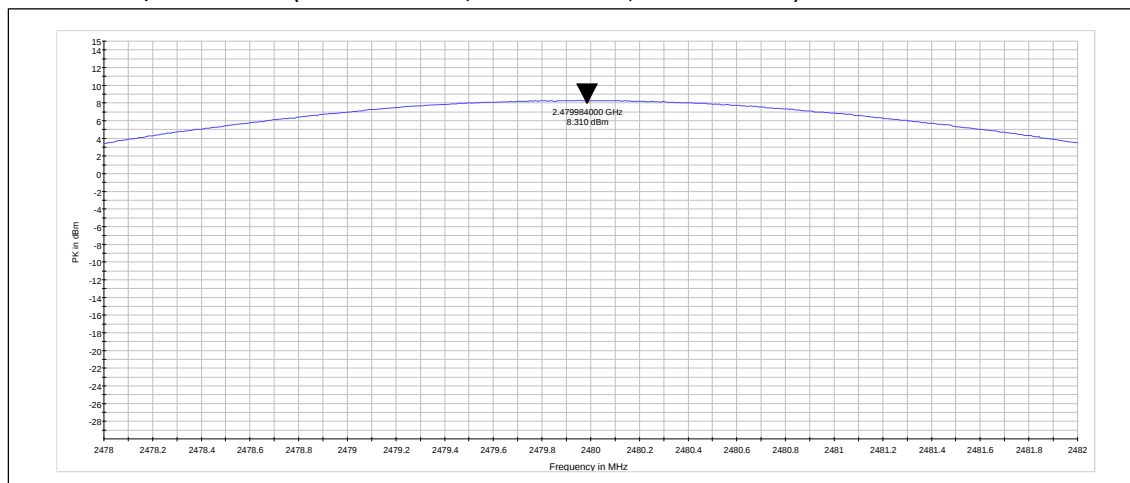

3. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8(0.5))

EUT with DUT number	RM-1045, DUT 18196
Accessories with DUT numbers	AC-60E, DUT 18197 ; WH-208, DUT 18198
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 39 / 102.9
Date of measurements	15-Apr-2014
Measured by	Jari Keto

3.1. Test Setup

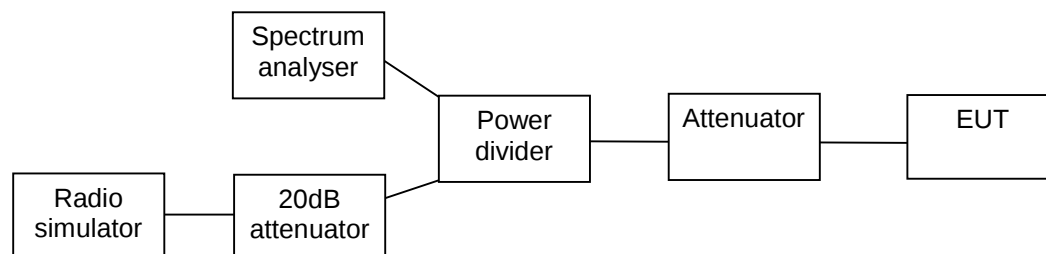

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

3.3. Bluetooth Test results

3.3.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

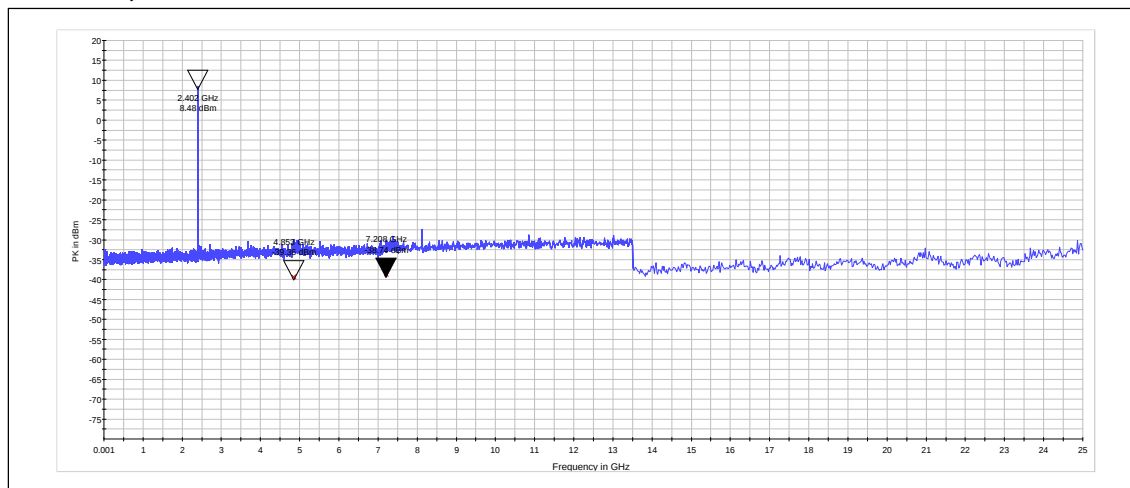

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4852.800	-39.36	PASSED
7207.800	-38.74	PASSED


Channel 40 / 2442 MHz

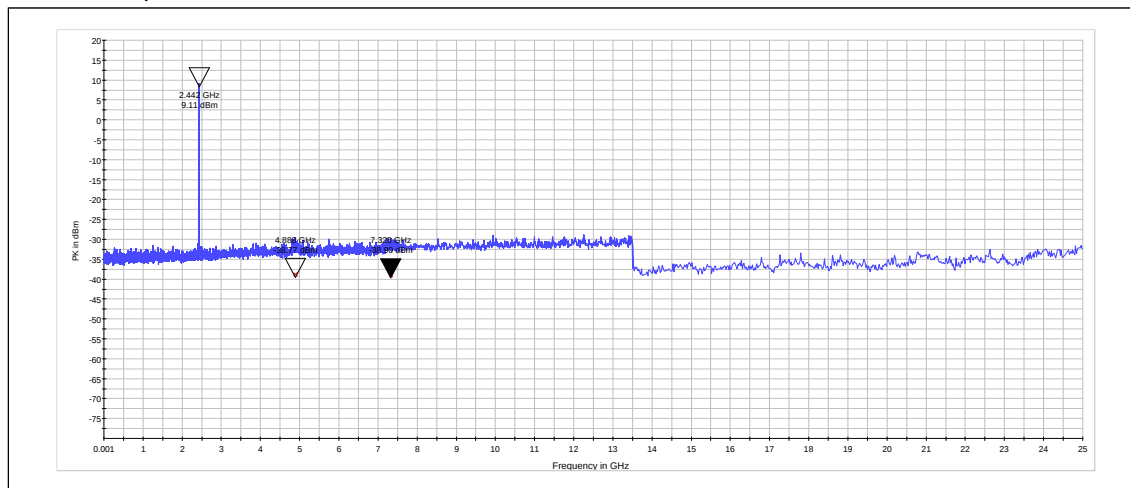

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4887.600	-38.77	PASSED
7328.400	-38.90	PASSED

Channel 78 / 2480 MHz

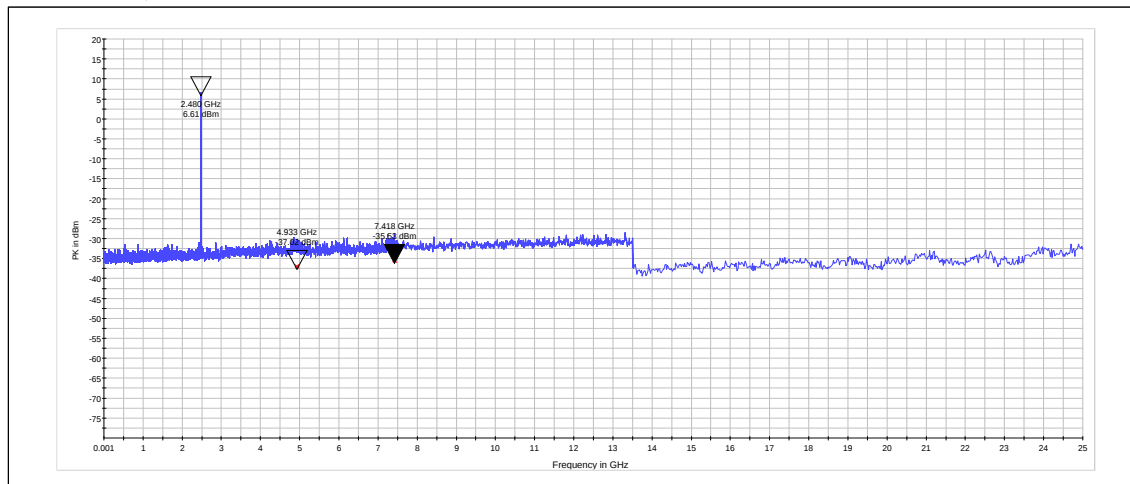


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4933.200	-37.02	PASSED
7418.400	-35.53	PASSED

3.3.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

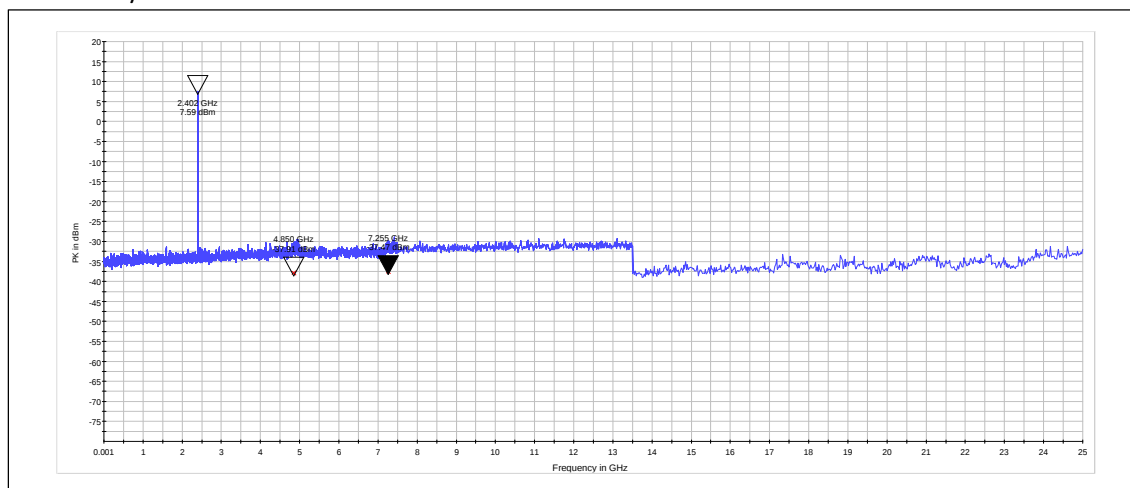

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4849.600	-37.91	PASSED
7254.600	-37.47	PASSED


Channel 40 / 2442 MHz

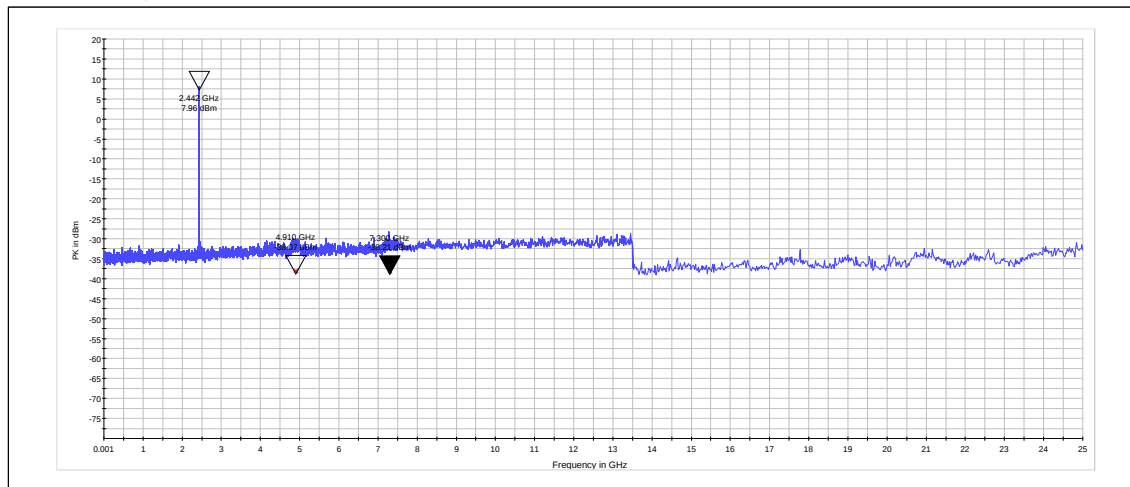

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4909.600	-38.07	PASSED
7299.600	-38.21	PASSED

Channel 78 / 2480 MHz

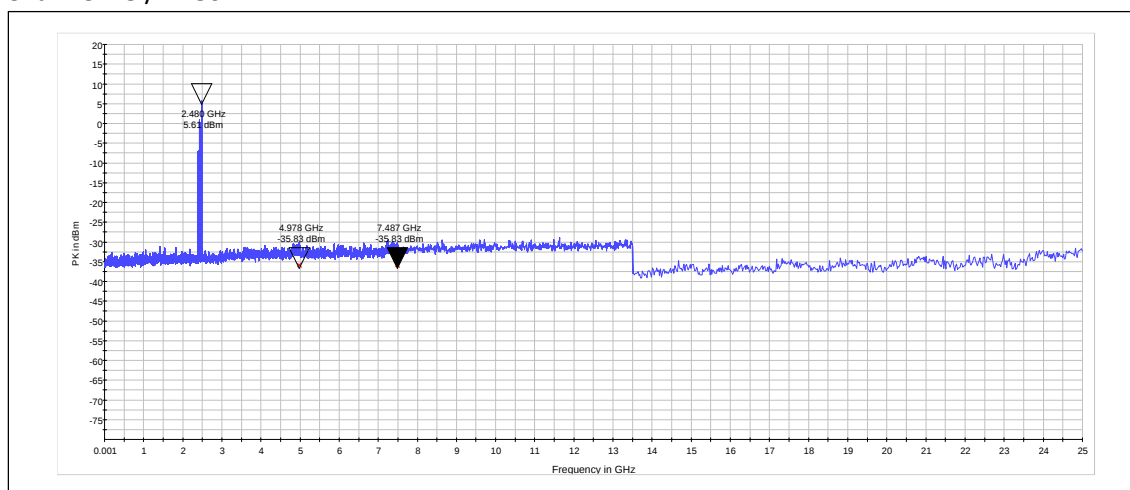


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4978.400	-35.83	PASSED
7486.800	-35.83	PASSED

4. 20dB(bandwidth) (FCC §15.247(a)(1), RSS-210 A8(0.1(1)))

EUT with DUT number	RM-1045, DUT 18196
Accessories with DUT numbers	AC-60E, DUT 18197 ; WH-208, DUT 18198
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 39 / 102.9
Date of measurements	15-Apr-2014
Measured by	Jari Keto

4.1. Test Setup

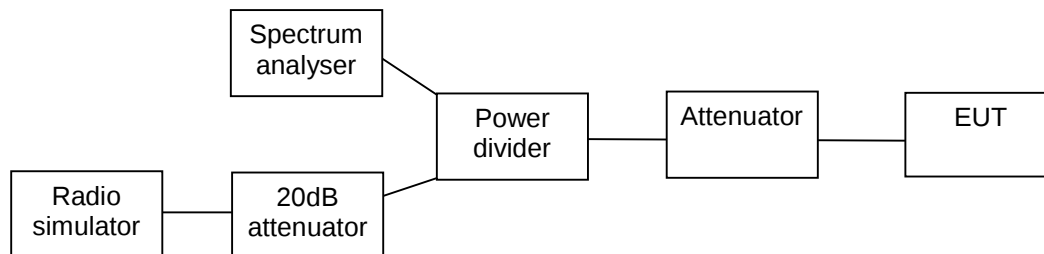

4.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

4.3. Bluetooth Test results


4.3.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]
0 / 2402	940
40 / 2442	944
78 / 2480	944


0 / 2402

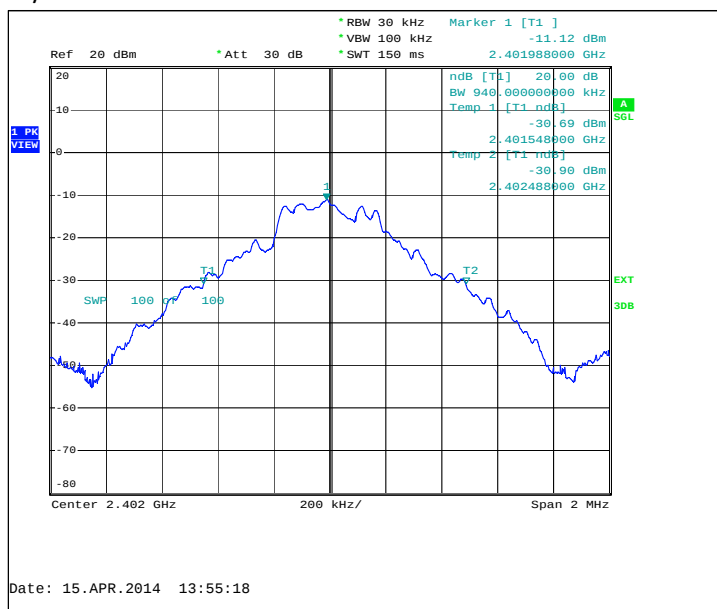

40 / 2442

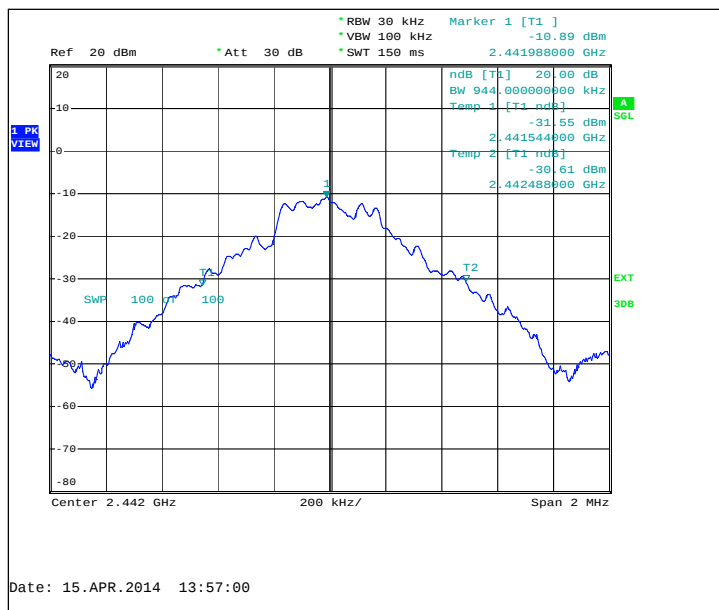


78 / 2480

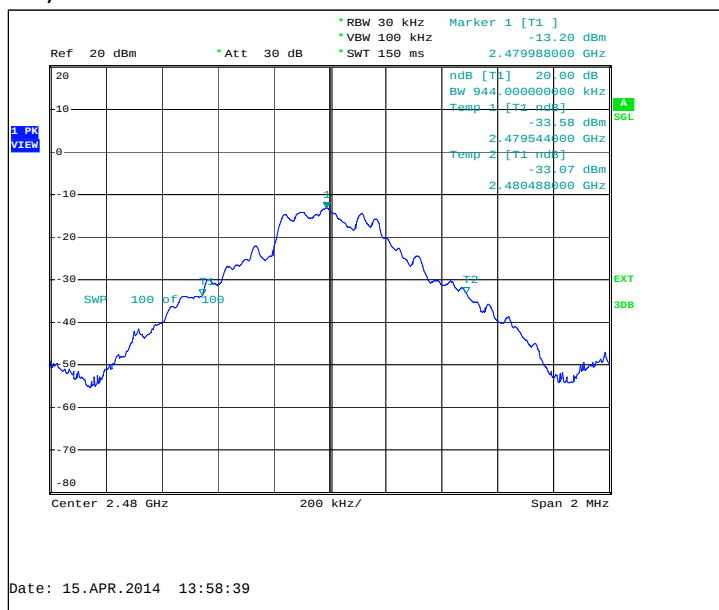


4.3.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]
0 / 2402	1304
40 / 2442	1304
78 / 2480	1304


0 / 2402

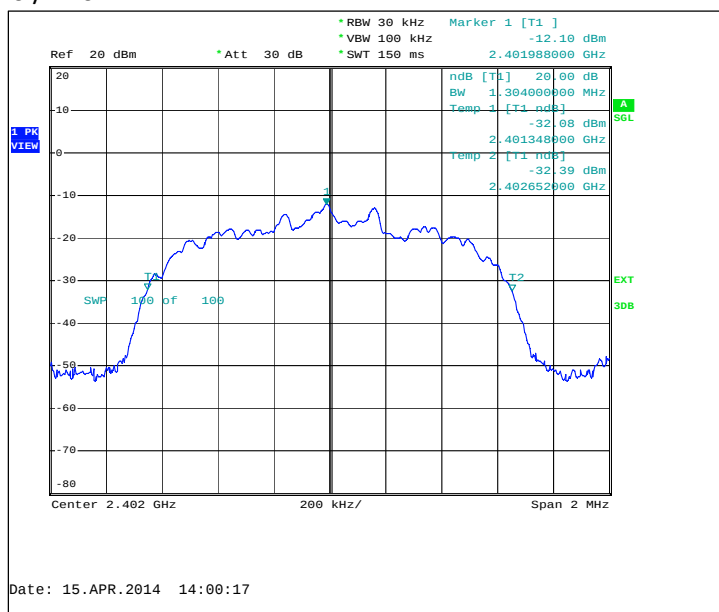

40 / 2442

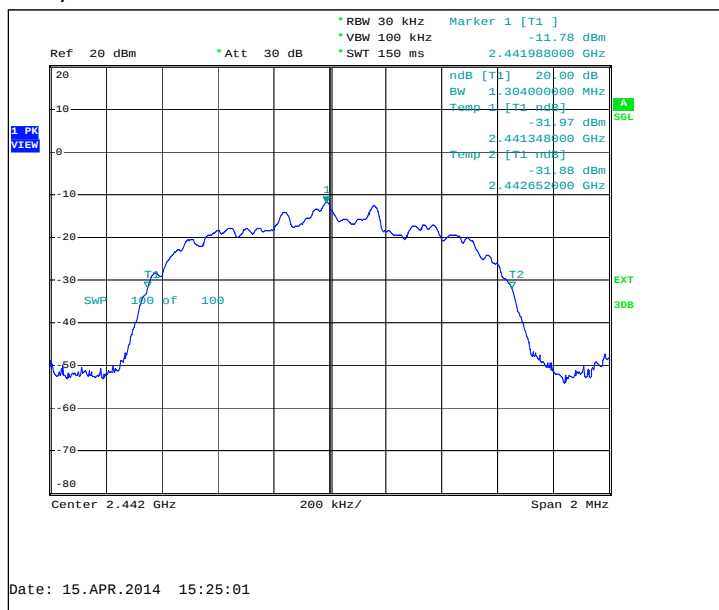


78 / 2480

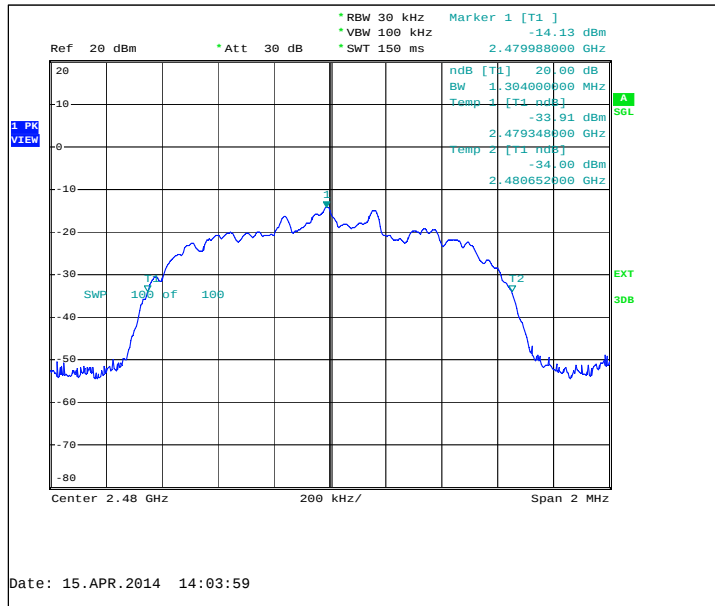

5. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8(0.1(2)))

EUT with DUT number	RM-1045, DUT 18196
Accessories with DUT numbers	AC-60E, DUT 18197 ; WH-208, DUT 18198
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 39 / 102.9
Date of measurements	15-Apr-2014
Measured by	Jari Keto

5.1. Test Setup

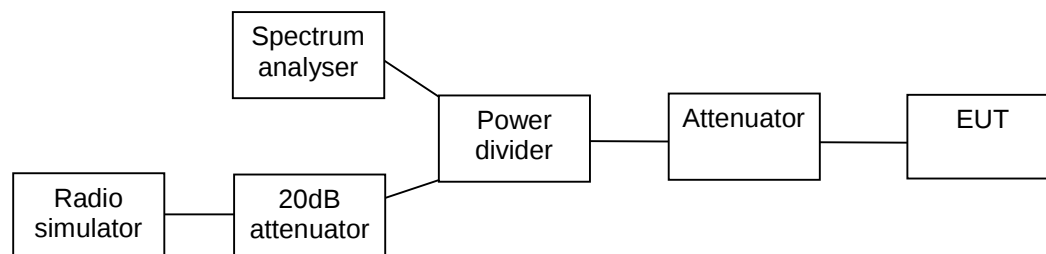

5.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

5.3. Bluetooth Test results

5.3.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
960	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

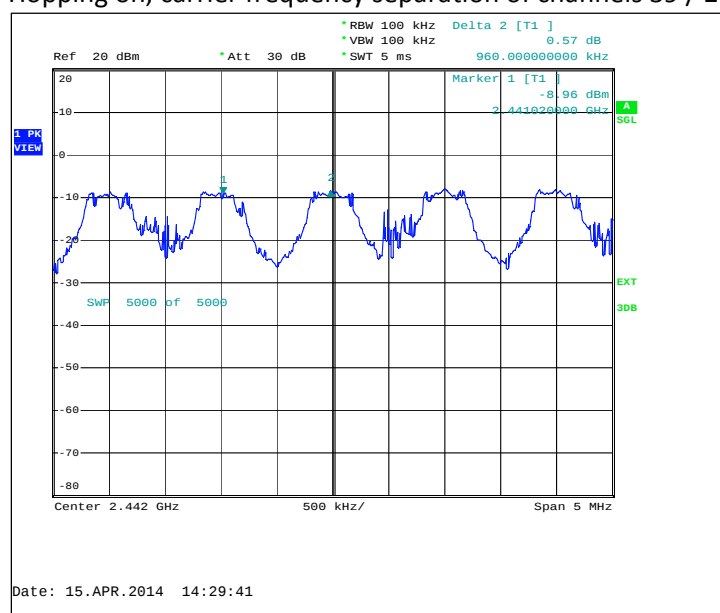

5.3.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
990	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

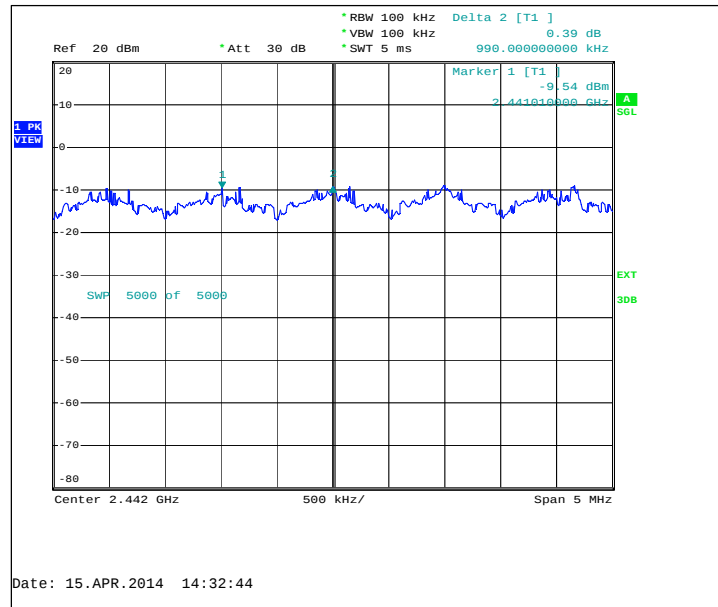

6. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8(0.1(4)))

EUT with DUT number	RM-1045, DUT 18196
Accessories with DUT numbers	AC-60E, DUT 18197 ; WH-208, DUT 18198
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 39 / 102.9
Date of measurements	15-Apr-2014
Measured by	Jari Keto

6.1. Test Setup

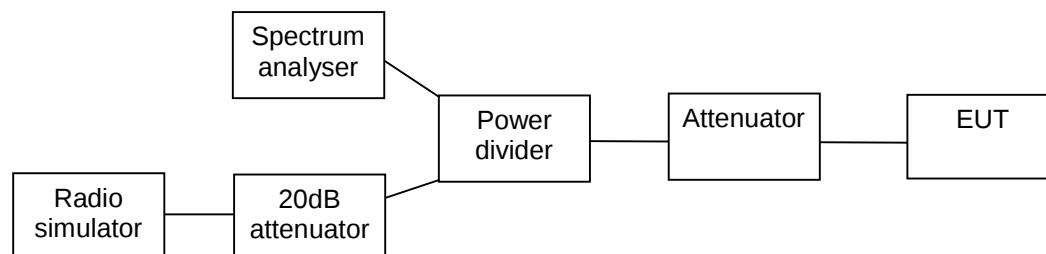

6.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

6.3. Bluetooth Test results

6.3.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED


Hopping on, number of hopping frequencies

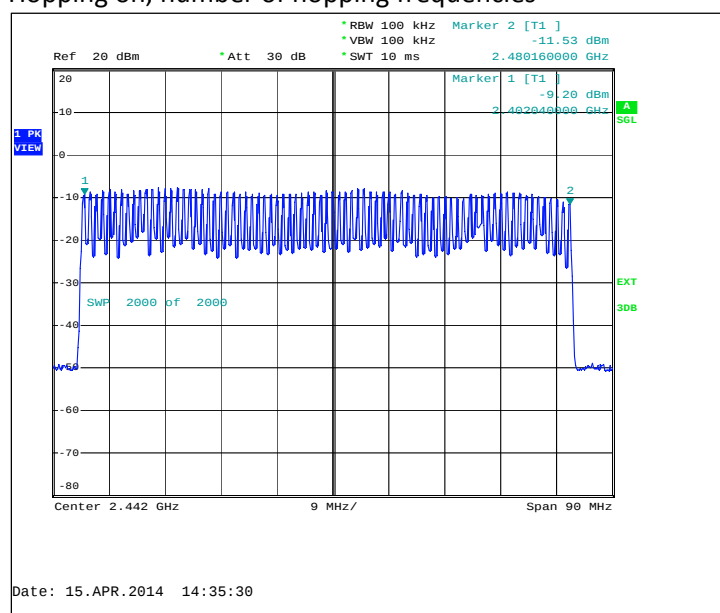

6.3.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
75	PASSED


Hopping on, number of hopping frequencies

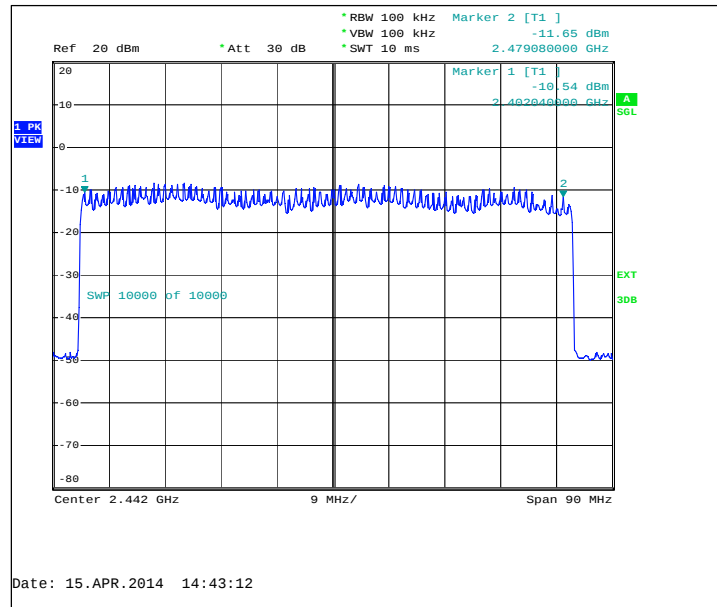

7. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8(0.1(4)))

EUT with DUT number	RM-1045, DUT 18196
Accessories with DUT numbers	AC-60E, DUT 18197 ; WH-208, DUT 18198
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 39 / 102.9
Date of measurements	15-Apr-2014
Measured by	Jari Keto

7.1. Test Setup

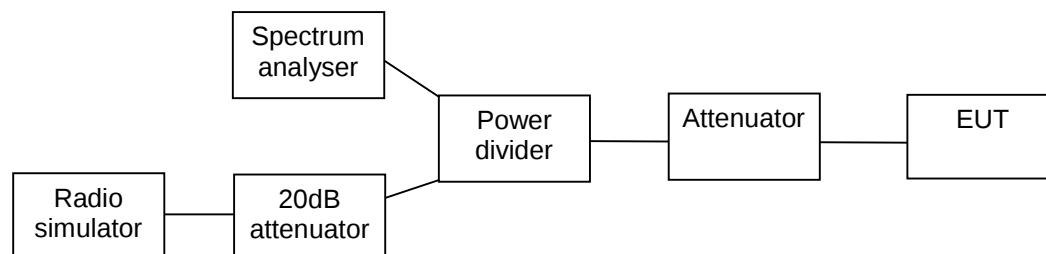

7.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

7.3. Bluetooth Test results


7.3.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ms]	Time of occupancy [s]	Result
91	2.912	0.265	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

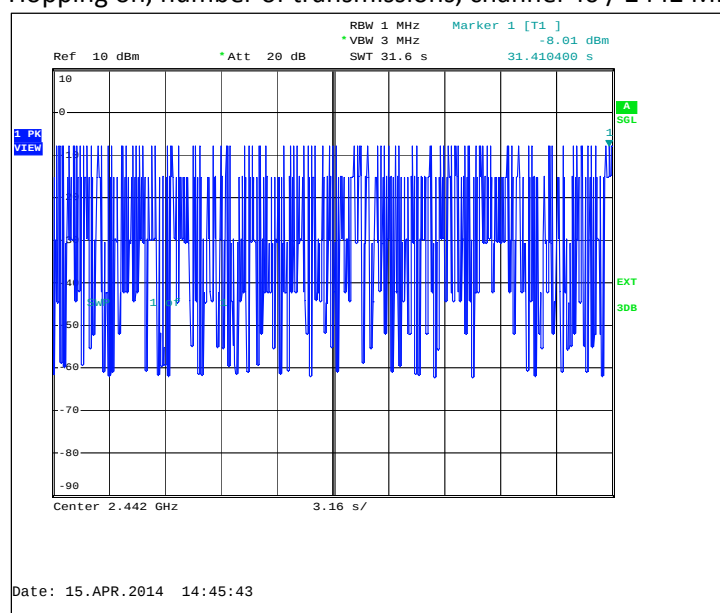


Hopping on, duration of one transmission, channel 40 / 2442 MHz

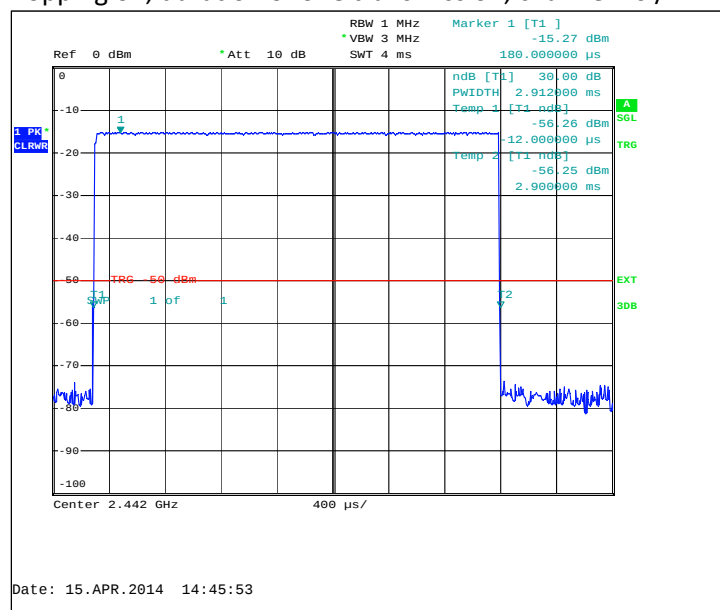


7.3.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ms]	Time of occupancy [s]	Result
92	2.912	0.268	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

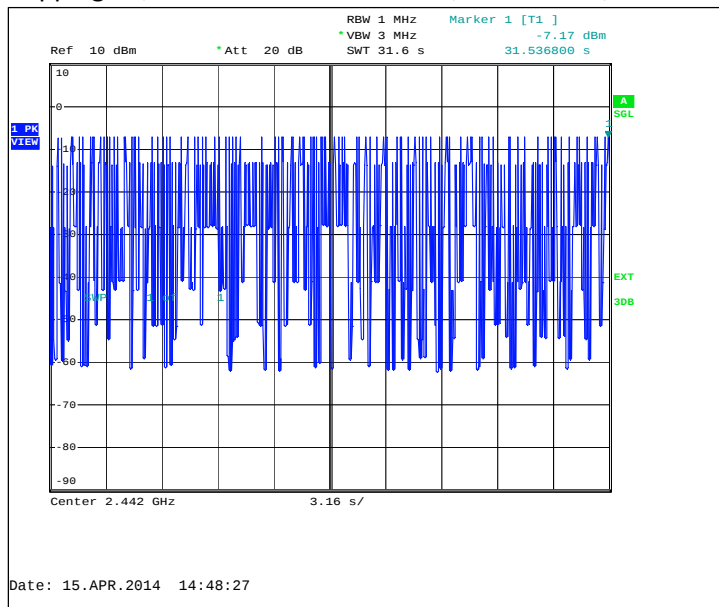


Hopping on, duration of one transmission, channel 40 / 2442 MHz

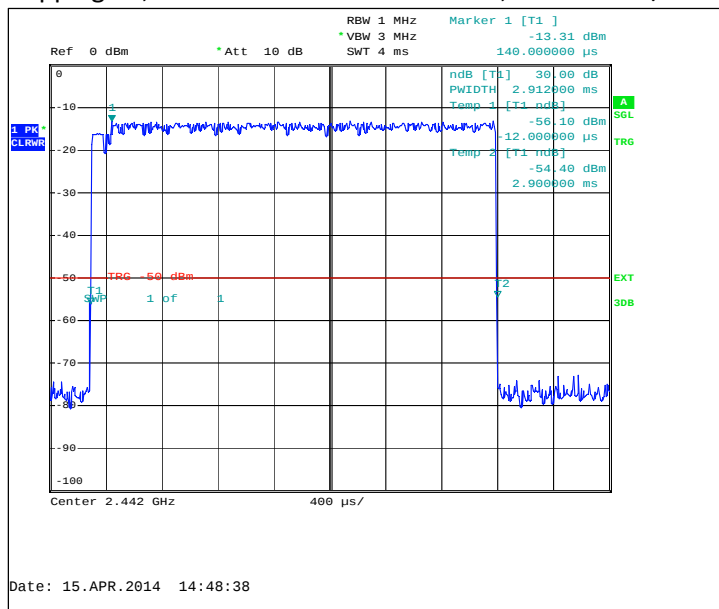

8. Band edge compliance of RF emissions (FCC 15.247(d), 15.205(b), RSS-210 A8(0.5))

EUT with DUT number	RM-1045, DUT 18216
Accessories with DUT numbers	AC-60E, DUT 18217 ; WH-208, DUT 18218 ; CA-190CD, DUT 18219
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 41 / 102.4
Date of measurements	20-Apr-2014
Measured by	Sami Lehtonen

8.1.1 Test setup

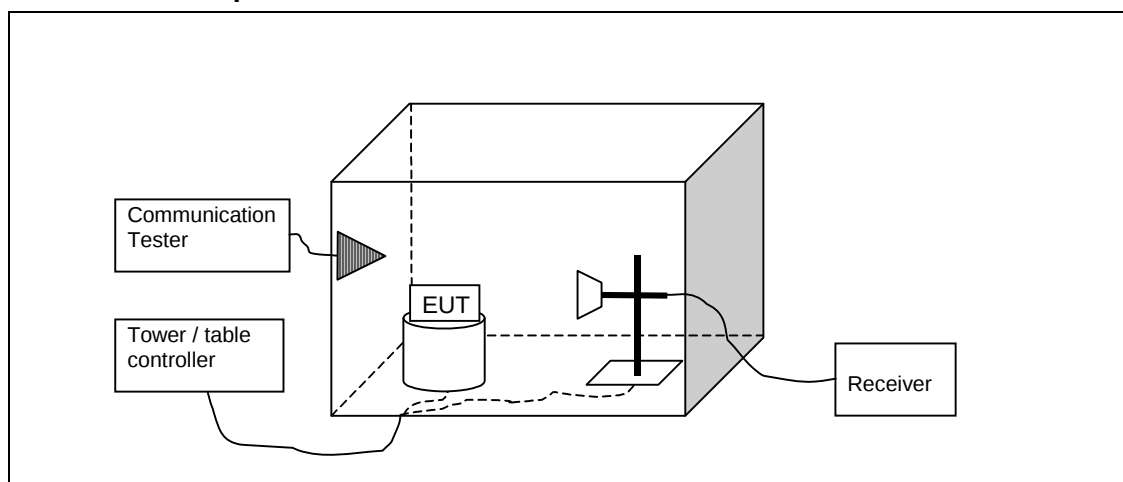

8.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit
Below 2390 and above 2483.5	54 dBuV/m (avg) and 74 dBuV/m (pk)

8.3. Bluetooth test results

8.3.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

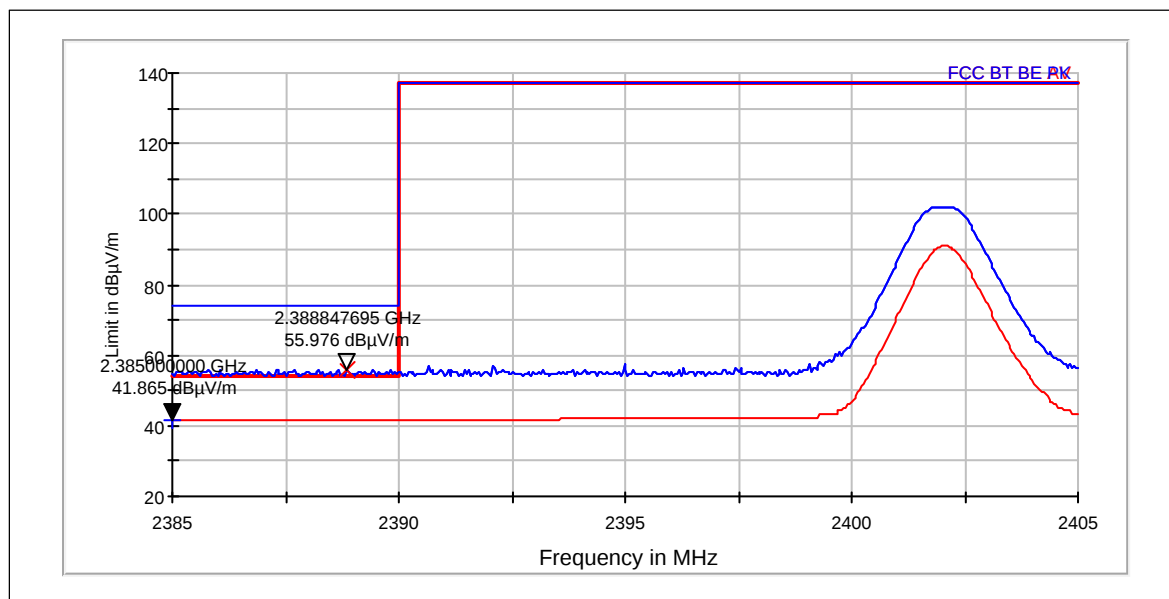


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2389	55.98	629.216	55.24	0.75	0.751	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2385	41.87	123.951	41.13	0.75	0.751	PASSED

Hopping on. Low end.

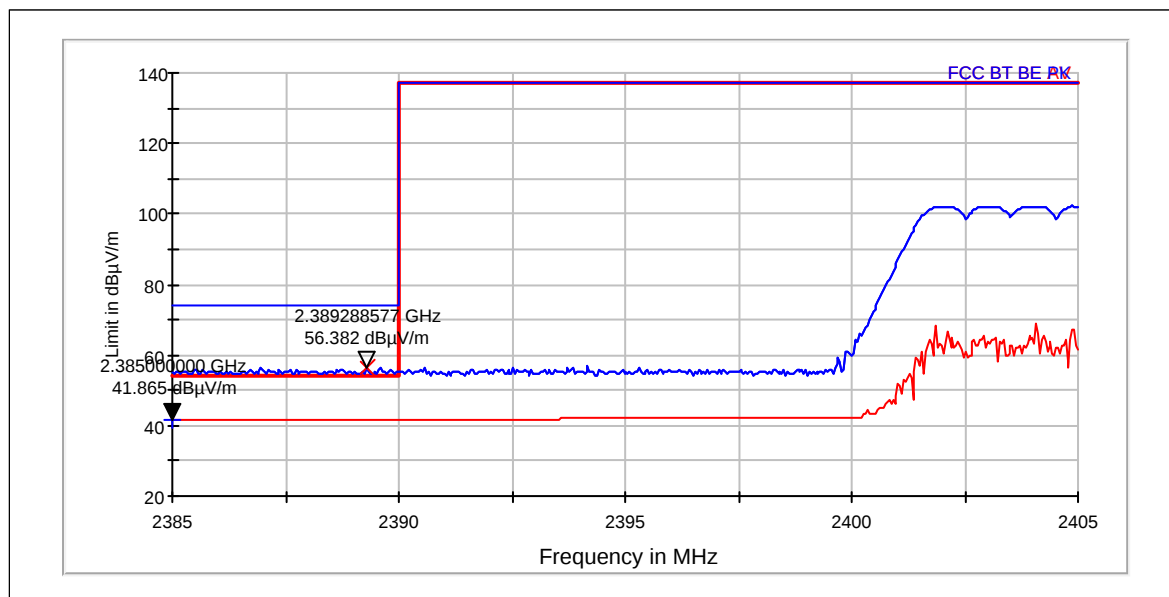


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2389	56.38	659.326	55.64	0.75	0.751	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2385	41.87	123.951	41.13	0.75	0.751	PASSED

Channel 78 / 2480 MHz

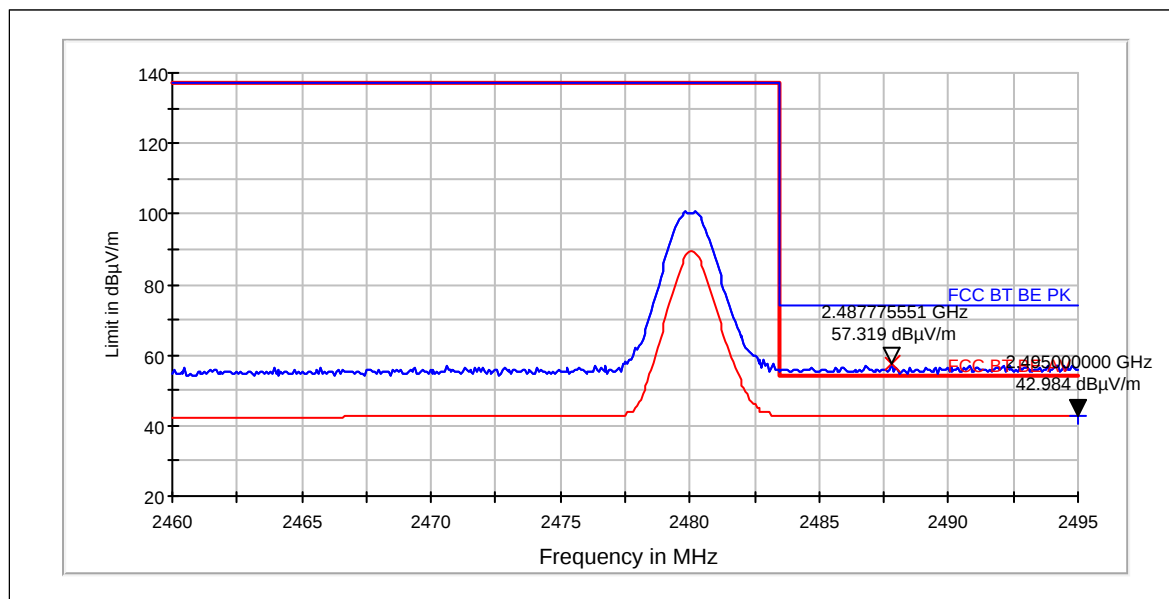


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2488	57.32	734.429	55.9	1.42	1.422	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2495	42.98	140.994	41.56	1.42	1.422	PASSED

Hopping on. High end.

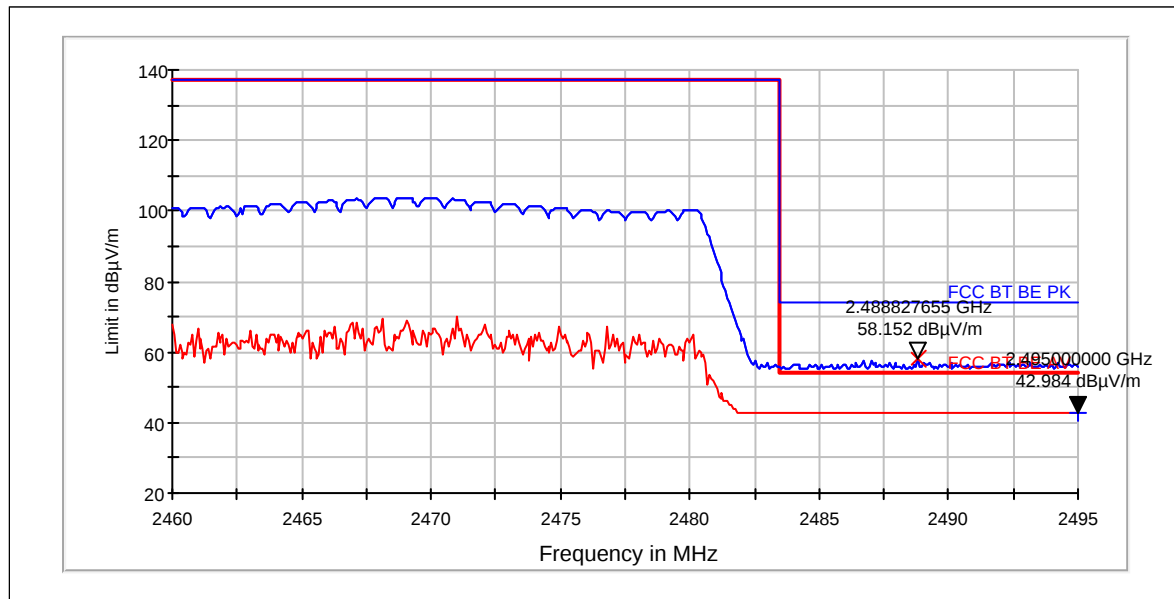

Peak (RBW: 1 MHz, VBW: 1 MHz)


Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2489	58.15	808.351	56.73	1.42	1.422	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2495	42.98	140.994	41.56	1.42	1.422	PASSED

8.3.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

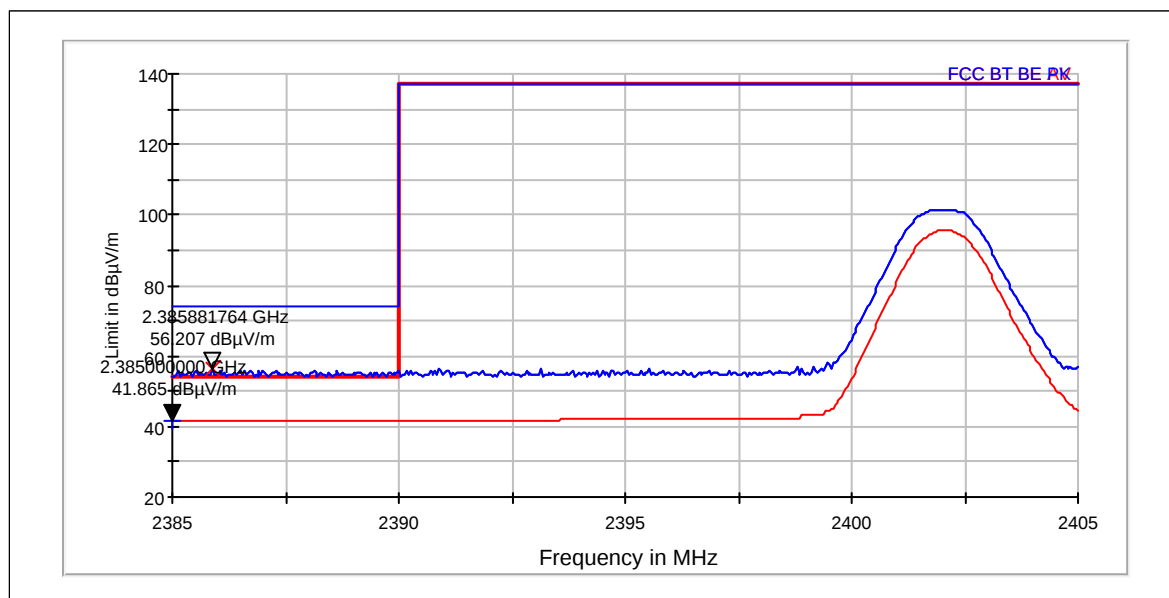


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2386	56.21	646.175	55.47	0.75	0.751	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2385	41.87	123.951	41.13	0.75	0.751	PASSED

Hopping on. Low end.

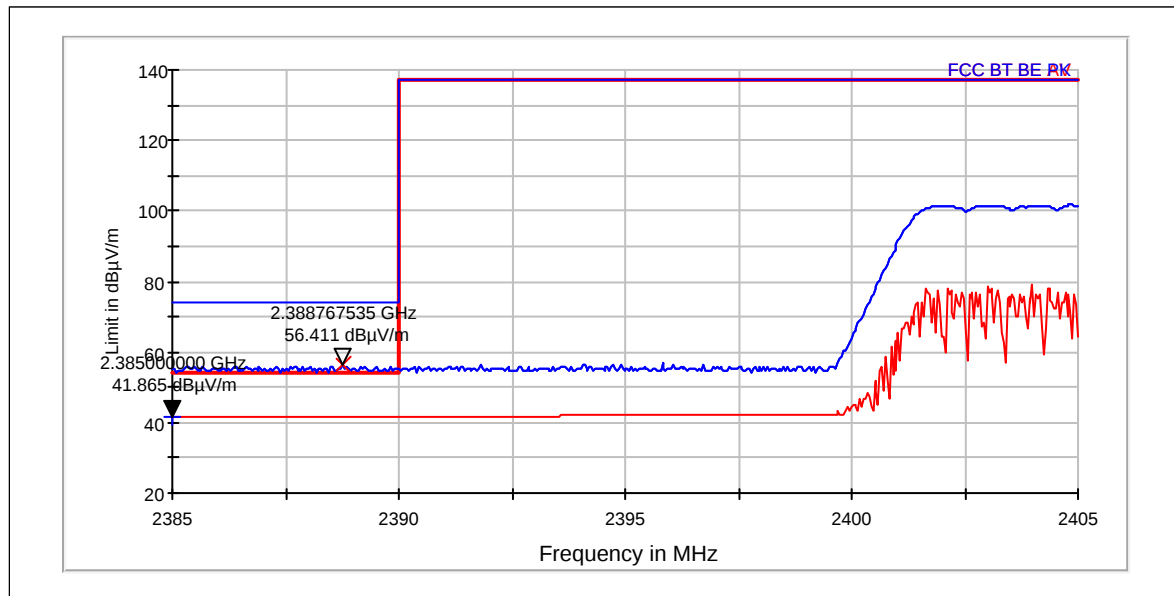


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2389	56.41	661.531	55.67	0.75	0.751	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2385	41.87	123.951	41.13	0.75	0.751	PASSED

Channel 78 / 2480 MHz

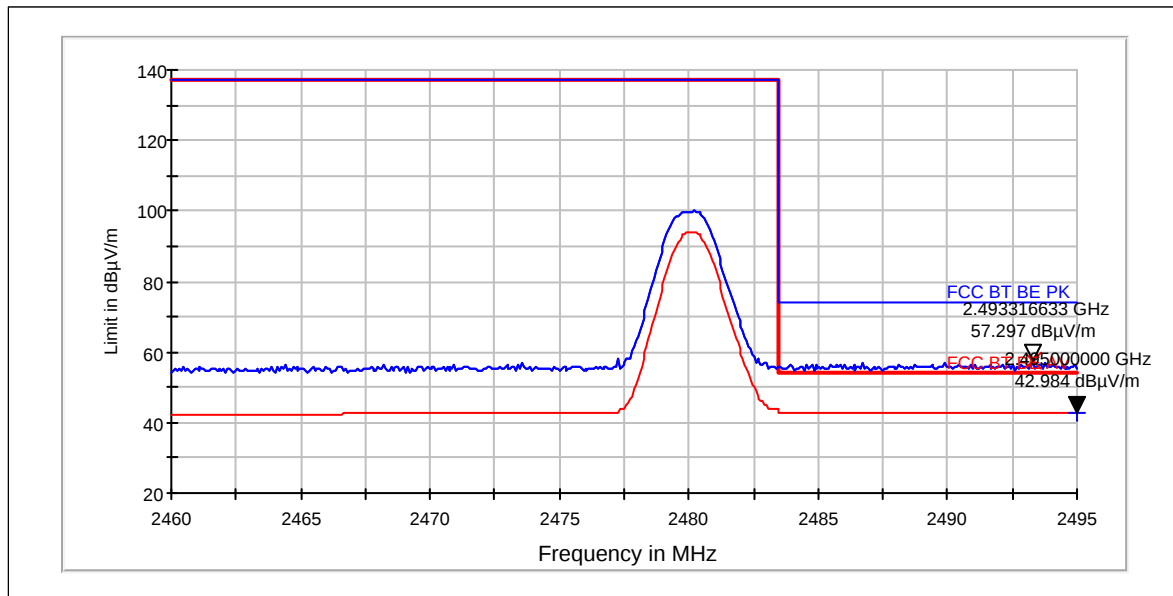


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2493	57.3	732.571	55.88	1.42	1.422	PASSED

Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2495	42.98	140.994	41.56	1.42	1.422	PASSED

Hopping on. High end.

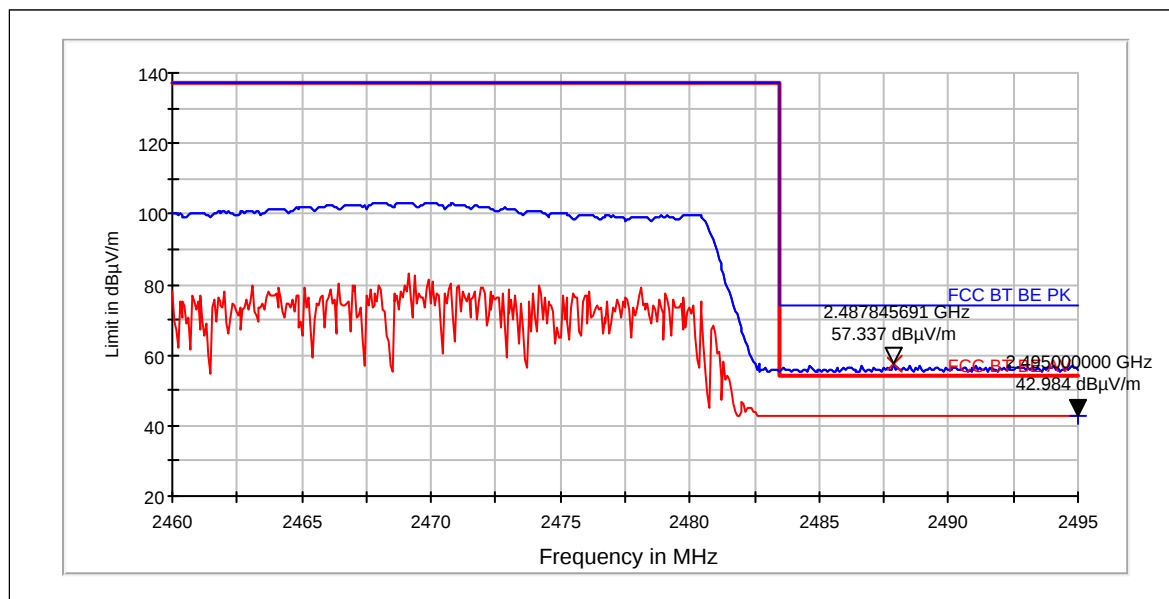

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2488	57.34	735.953	55.92	1.42	1.422	PASSED


Average (RBW: 1 MHz, VBW: 10 Hz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Correction [dB]	Results
2495	42.98	140.994	41.56	1.42	1.422	PASSED

9. Radiated emissions (FCC 15.247(d), 15.209, RSS-210, A8(0.5))

EUT with DUT number	RM-1045, DUT 18216
Accessories with DUT numbers	AC-60E, DUT 18217 ; WH-208, DUT 18218 ; CA-190CD, DUT 18219
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 41 / 102.4
Date of measurements	20-Apr-2014
Measured by	Sami Lehtonen

9.1.1 Test setup

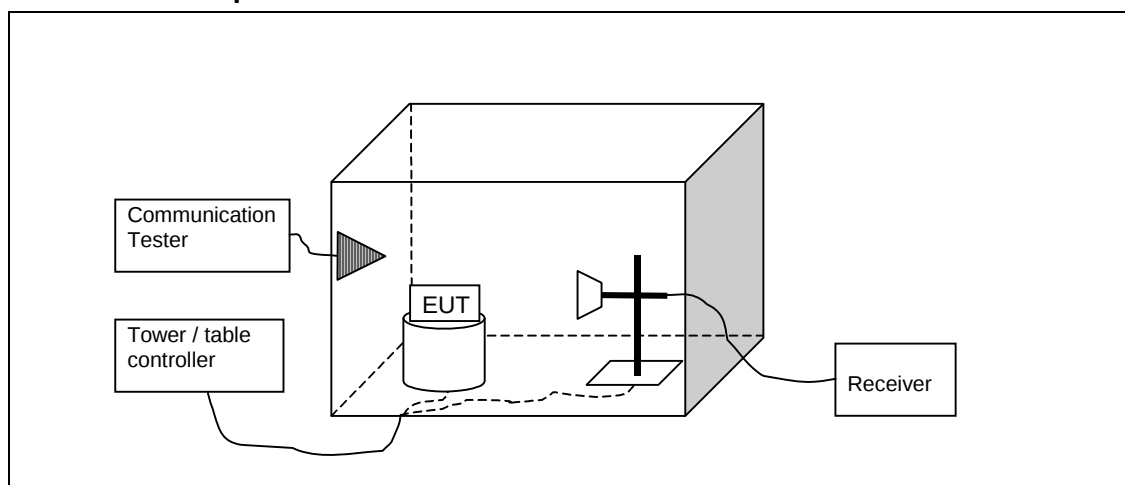

9.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:
The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

9.3. Bluetooth test results

9.3.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
30.06	26.24	20.512	29.54	-3.3	40	13.76	PASSED
30.09	25.88	19.679	29.18	-3.3	40	14.12	PASSED
34.912	24.4	16.596	30.9	-6.5	40	15.6	PASSED
35.278	24.09	16.014	30.79	-6.7	40	15.91	PASSED
39.556	27.2	22.909	36.6	-9.4	40	12.8	PASSED
39.909	26.33	20.725	35.93	-9.6	40	13.67	PASSED
41.103	27.07	22.568	37.47	-10.4	40	12.93	PASSED
41.727	27.61	24.016	38.41	-10.8	40	12.39	PASSED
45.231	22.67	13.599	35.77	-13.1	40	17.33	PASSED
46.395	22.57	13.443	36.57	-14	40	17.43	PASSED

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4803.8	49.2	288.403	51.2	-2	74	24.78	PASSED
7206.1	46.84	219.786	43.44	3.4	95	48.39	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4803.8	35.2	57.544	37.2	-2	54	18.78	PASSED
7206.1	33.49	47.261	30.09	3.4	---	---	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4960.1	49.96	314.775	51.86	-1.9	74	24.02	PASSED
7439.7	46.75	217.52	42.25	4.5	74	27.23	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4960.1	36.52	66.988	38.42	-1.9	54	17.46	PASSED
7439.7	33.93	49.716	29.43	4.5	54	20.05	PASSED

9.3.2 8DPSK modulation, PRBS packet type

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
30.03	24.96	17.701	28.26	-3.3	40	15.04	PASSED
30.09	25.93	19.792	29.23	-3.3	40	14.07	PASSED
35.338	23.97	15.794	30.67	-6.7	40	16.03	PASSED
39.346	25.5	18.836	34.8	-9.3	40	14.5	PASSED
40.809	27.97	25.032	38.17	-10.2	40	12.03	PASSED
40.953	27.89	24.803	38.19	-10.3	40	12.11	PASSED
41.607	26.97	22.31	37.67	-10.7	40	13.03	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
10611.326	53.13	453.419	41.43	11.7	74	20.85	PASSED
10949.1	53.83	491.473	41.43	12.4	74	20.15	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
10611.326	39.87	98.514	28.17	11.7	54	14.11	PASSED
10949.1	40.31	103.633	27.91	12.4	54	13.67	PASSED

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4803.9	49.46	297.167	51.46	-2	74	24.52	PASSED
7205.6	47.11	226.725	43.71	3.4	95	48.12	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4803.9	35.15	57.214	37.15	-2	54	18.83	PASSED
7205.6	32.78	43.551	29.38	3.4	---	---	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Limit [dB μ V/m]	Margin	Results
4960	50.08	319.154	51.98	-1.9	74	23.9	PASSED
7440.6	48.11	254.39	43.61	4.5	74	25.87	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Limit [dB μ V/m]	Margin	Results
4960	35.98	62.951	37.88	-1.9	54	18	PASSED
7440.6	33.99	50.061	29.49	4.5	54	19.99	PASSED

10. Test Equipment

10.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
6039	USB Interface	5541765	Testo	22/24/27, 15C, 15B
6044	V-network	ESH3-Z6	R&S	-
2059	V-network	ESH3-Z6	R&S	-
1759	LISN 50 μ H	ESH3-Z5	R&S	22/24/27, 15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	22/24/27, 15C, 15B
1999	Receiver	ESIB26	R&S	22/24/27, 15C, 15B
2180	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2390	Directional Coupler	DC2600	AR	-
-	RF immunity / Emission Software	EMC32	R&S	22/24/27, 15C, 15B
2060	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
1759	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
2039	Power Supply	PL330QMD	Thurlby	15C, 15B
6036	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
2359	Temperature Test Chamber	VT4002	Vötsch	22/24/27
2352	Spectrum Analyzer	FSP-30	R&S	22/24/27, 15C
6109	Communication Tester	CMU200	R&S	22/24/27, 15C
6246	Power Supply	66332A	HP	22/24/27, 15C
1992	Signal Generator	83630B	Agilent	15C, 15B
6098	Signal Generator	8648C	Agilent	-
6046	Attenuator 10dB	8493C	Agilent	22/24/27, 15C
6047	Attenuator 20dB	8493C	Agilent	22/24/27, 15C
6045	Power splitter	11667B	Agilent	22/24/27, 15C
6247	Communication Tester	CBT	R&S	22/24/27, 15C 15B
6052	Communication Tester	CMU200	R&S	22/24/27, 15C 15B
6248	Power Supply	6632B	-	22/24/27, 15C 15B
6106	Spectrum Analyzer	FSP-30	R&S	22/24/27, 15C 15B
6113	Signal Generator	SMF100A	R&S	22/24/27, 15C 15B
6202	Temperature Test Chamber	VT4002	Vötsch	22/24/27, 15C 15B
6122	Power Splitter	11667B	Agilent	22/24/27, 15C 15B
6134	Attenuator 10dB	BW-S10-2W263+	Mini-Circuits	22/24/27, 15C
6136	Attenuator 20dB	BW-S20-2W263+	Mini-Circuits	22/24/27, 15C
6103	Bluetooth tester	CBT	R&S	22/24/27, 15C 15B
6250	Power Supply	6651A	Agilent	22/24/27, 15C 15B
6108	Communication Tester	CMU200	R&S	22/24/27, 15C 15B
6105	Spectrum Analyzer	FSV-30	R&S	22/24/27, 15C 15B
6251	Temperature Test Chamber	VT4002	Vötsch	22/24/27, 15C 15B
6243	Power Splitter	1167B	Agilent	22/24/27, 15C 15B
6245	Attenuator 10dB	BW-S10-2W263+	Mini-Circuits	22/24/27, 15C 15B
6244	Attenuator 20dB	BW-S20-2W263+	Mini-Circuits	22/24/27, 15C 15B

10.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
2388	Bluetooth Tester	CBT	R&S	15B
10479	Communication Tester	CMW500	R&S	22/24/27, 15C, 15B
2347	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
2009	Signal Generator	SMP 22	R&S	22/24/27, 15C, 15B
2348	Controller	G-1000DXC	Yaesu	22/24/27, 15C, 15B
2349	Computer Controller	g-1000DXC	Yaesu	22/24/27, 15C, 15B
2116	Controller	EMCO 2090	ETS	22/24/27, 15C, 15B
2109	Power Supply	PL330QMD	Thurlby	22/24/27, 15C, 15B
2353	Receiver	ESIB26	R&S	22/24/27, 15C, 15B
6115	Open switch and control unit	OSP 130	R&S	22/24/27, 15C 15B
6116	Open switch and control unit	OSP 150	R&S	22/24/27, 15C 15B

Eq. No	Equipment	Type	Manufacturer	Used in
6117	Open switch and control unit	OSP 150	R&S	22/24/27, 15C, 15B
6131	Notch Filter	WRCT902.4-0.4/40-8SS	Wainwright	22/24/27, 15C, 15B
6130	Notch Filter	WRCD1880-1.1.25/50-10SS	Wainwright	22/24/27
6159	Band Reject Filter	WRCD1747.8-0.4/40-5SS	Wainwright	22/24/27, 15C, 15B
6158	Band Reject Filter	WRCT836.6-0.4/40-8SS	Wainwright	22/24/27, 15C, 15B
6197	Band Reject Filter	WRCJV2531/2539-2523/2547-60/12SS	Wainwright	22/24/27, 15C, 15B
2231	Band Reject Filter	WRCG1947/1953-1940/1960-40/6SS	Wainwright	22/24/27, 15C, 15B
2391	Band Reject Filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
2386	Band Reject Filter	WRCG1764.4/1770.4-1760.4/1774.4-40/6SS	Wainwright	22/24/27, 15C, 15B
2385	Band Reject Filter	WRCG1744.4/1750.4-1740.4/1754.4-40/6SS	Wainwright	22/24/27, 15C, 15B
2357	Band Reject Filter	WRCG2400/2483-2390/2493-35/10SS	Wainwright	15C
2188	Preamplifier	AFS4-00100300-20-23P-6	Miteq	22/24/27, 15C, 15B
6195	High Pass Filter	-	Wainwright	22/24/27, 15C, 15B
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	24
2361	Anechoic Chamber	3 m Semi / Full Anechoic Chamber	Euroshield	22/24/27, 15C, 15B
6212	Antenna Array system	-	TCC	22/24/27, 15C, 15B
-	RF immunity / Emission Software	EMC32	R&S	22/24/27, 15C, 15B
6089	Antenna	HFH2-Z2	R&S	15C, 15B
2027	CDN	M2 (modified) DC1	MEB	22/24/27, 15C, 15B
2028	CDN	M3 (modified) DC2	MEB	22/24/27, 15C, 15B
2176	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2135	CDN	CDN 801-M3	Lüthi	22/24/27, 15C, 15B
2029	Power Supply	PL330	Thurlby	22/24/27, 15C
6038	Data Logger	Testo 580	Testo	22/24/27, 15C, 15B
6037	Data Logger	175-H2	Testo	22/24/27, 15C, 15B
6039	USB Interface	5541765	Testo	22/24/27, 15C, 15B