

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CBT_RM-1077_08.docx	Date of Report:	28-Jan-2015
Number of pages:	44	Customer's Contact person:	Juha Paukku
Testing laboratory:	TCC Microsoft Tampere Laboratory P.O. Box 403 Visiokatu 3 FIN-33101 TAMPERE, FINLAND Tel. +358 71 800 8000 Fax. +358 71 804 6880	Customer:	Microsoft P.O. Box 403 Visiokatu 4 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-1077 / Battery BV-5TC / AC charger AC-20E / Headset WH-108		
FCC ID:	PYARM-1077	IC:	-
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Microsoft.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Hannu Soderholm, Specialist, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	03-Dec-2014
Testing completed	15-Dec-2014
The customer's contact person	Juha Paukku
Test Plan referred to	T:\Projects\RM-1077\TestPlan\RS_testplan_RM-1077.xlsm
Notes	-
Document name	T:\Projects\RM-1077\EMC\FCC15CBT_RM-1077_08.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power.

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-1077	004402740214303	1520	-	02149.00000.14441.39000	43247
Battery	BV-5TC	-	LG HW3.0	-	-	43239
AC charger	AC-20E	4868673411351126865;0675628	-	-	-	43140
Headset	WH-108	4163271	-	-	-	43213
Phone	RM-1077	004402740216126	1520	-	02149.00000.14441.39000	43243
Battery	BV-T5C	-	LG HW3.0	-	-	43244
AC charger	AC-20E	4090494156670711801;0675628	-	-	-	43229
Headset	WH-108	4235VFA	-	-	-	43230

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4(2)	Conducted peak output power	PASSED
15.247(d), 15.205(b)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.4	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8.1(a)	20dB(bandwidth)	PASSED
15.247(a)(1)	A8.1(b)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1(d)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1(d)	Time of occupancy	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Microsoft Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4(2))	5
2.1. Test Setup	5
2.2. Test method and limit	5
2.3. Bluetooth Test results	6
3. Band edge compliance of RF emissions (FCC 15.247(d), 15.205(b), RSS-210 A8.5)	9
3.2. Test method and limit	9
3.3. Bluetooth test results	10
4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)	18
4.1. Test Setup	18
4.2. Test method and limit	18
4.3. Bluetooth Test results	19
5. AC powerline conducted emissions (FCC §15.207, RSS-210 7.2.4)	23
5.1. Test Setup	23
5.2. Test method and limit	23
5.3. Bluetooth Test results	24
6. Spurious radiated emissions (FCC 15.247(d), 15.209, RSS-210 A8.5)	25
6.2. Test method and limit	26
6.3. Bluetooth test results	27
7. 20dB(bandwidth) (FCC §15.247(a)(1), RSS-210 A8.1(a))	29
7.1. Test Setup	29
7.2. Test method and limit	29
7.3. Bluetooth Test results	30
8. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1(b))	34
8.1. Test Setup	34
8.2. Test method and limit	34
8.3. Bluetooth Test results	35

9. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1(d))	37
9.1. Test Setup	37
9.2. Test method and limit	37
9.3. Bluetooth Test results	38
10. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1(d))	40
10.1. Test Setup	40
10.2. Test method and limit	40
10.3. Bluetooth Test results	41
11. Test Equipment	43
11.1. Conducted measurements	43
11.2. Radiated measurements	44

2. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4(2))

EUT with DUT number	RM-1077, DUT 43247
Accessories with DUT numbers	BV-5TC, DUT 43239 ; AC-20E, DUT 43140 ; WH-108, DUT 43213
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	Test system RF Cond 2
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25 / 41 / 100.3
Date of measurements	15-Dec-2014
Measured by	Hannu Söderholm

2.1. Test Setup

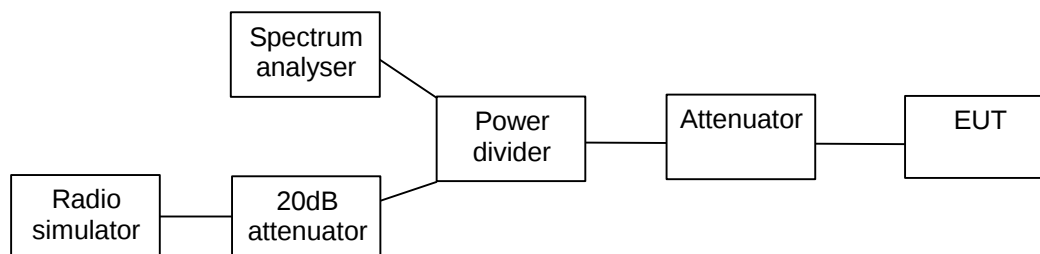

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5 5725 - 5850	≤ 1	≤ 30

2.3. Bluetooth Test results


2.3.1 GFSK modulation, PRBS packet type

Channel / f _c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	9.94	9.863	PASSED
40 / 2442	10.04	10.093	PASSED
78 / 2480	10.25	10.593	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

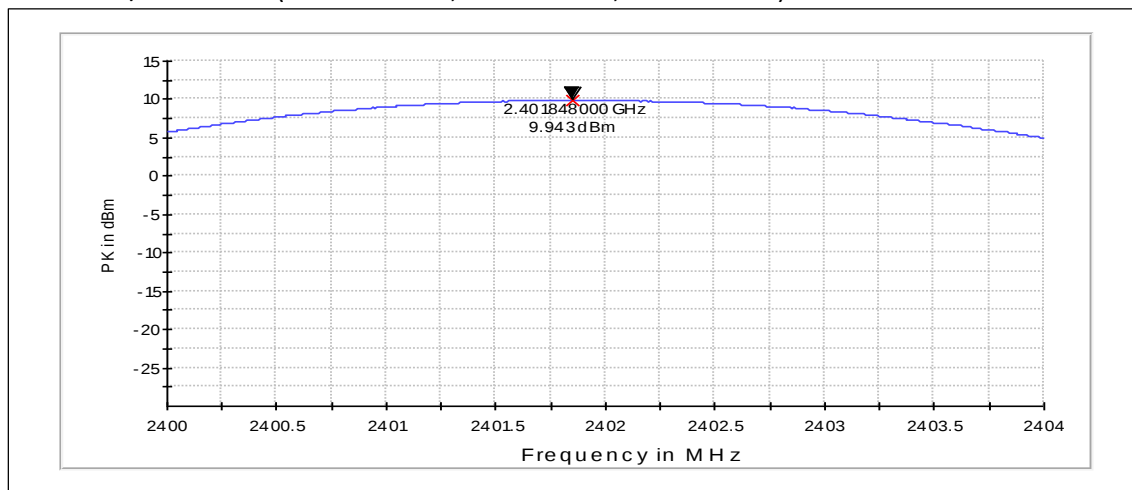

Channel 40 / 2442 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

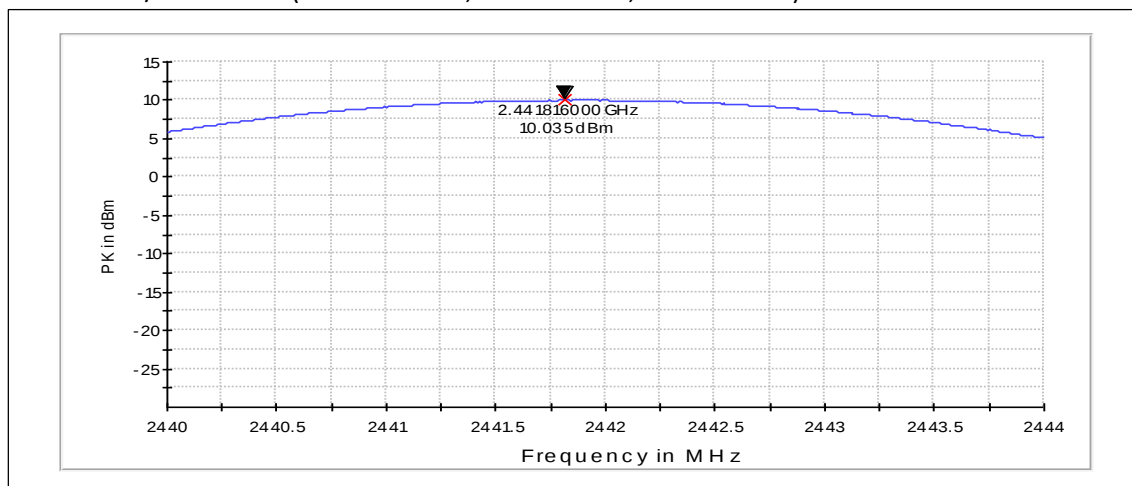


Channel 78 / 2480 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

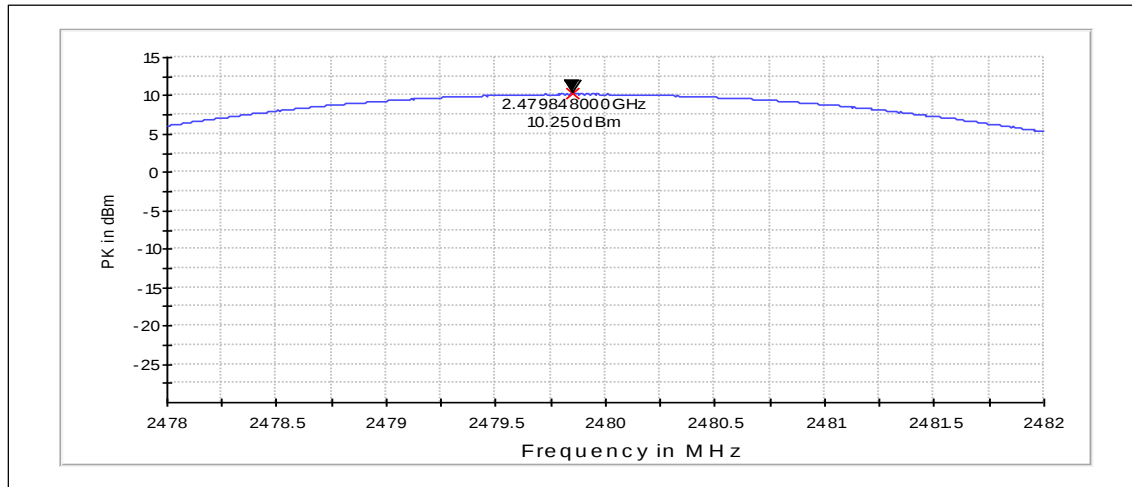


2.3.2 8DPSK modulation, PRBS packet type

Channel / f _c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	10.18	10.423	PASSED
40 / 2442	10.3	10.715	PASSED
78 / 2480	10.51	11.246	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

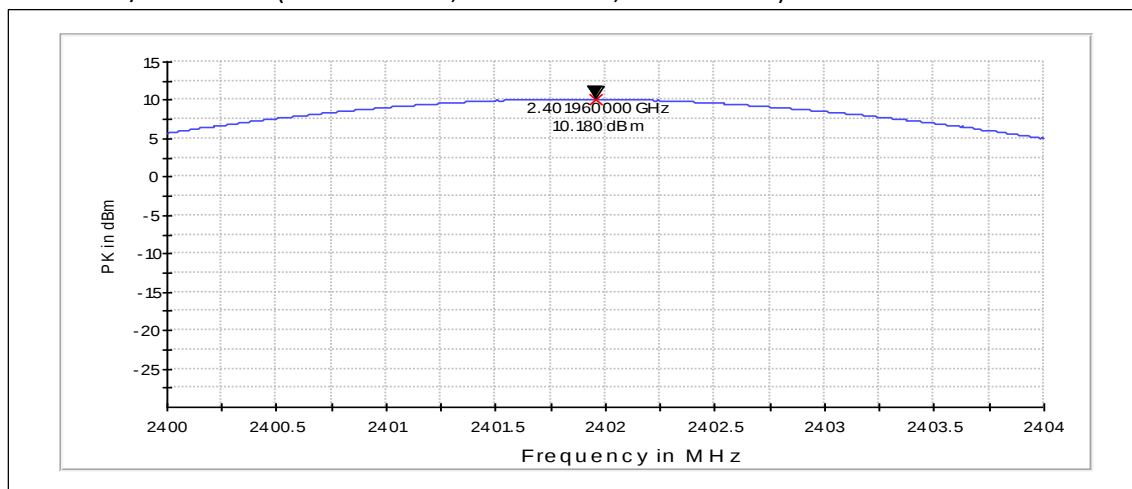

Channel 40 / 2442 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

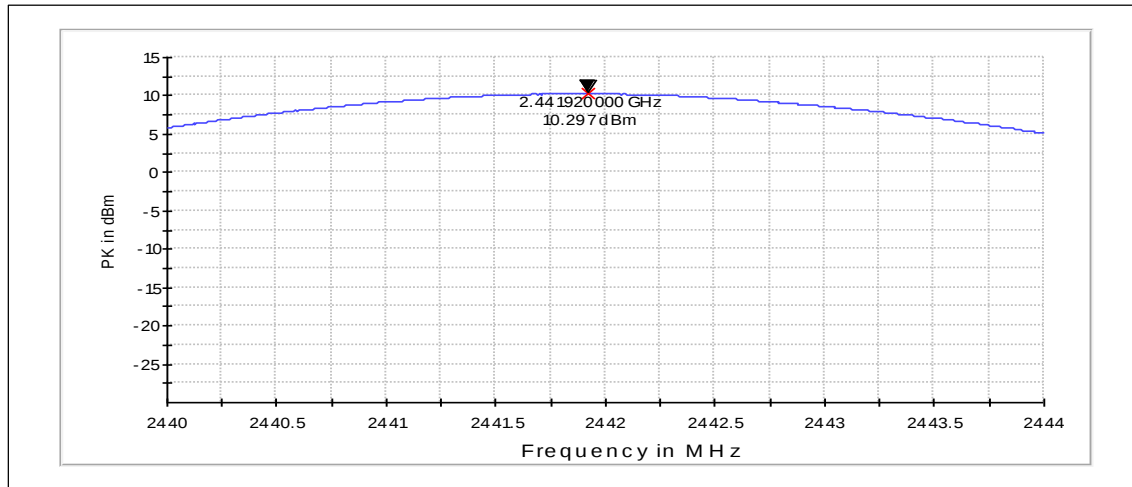


Channel 78 / 2480 MHz (Peak detector, RBW: 3 MHz, VBW: 3 MHz)

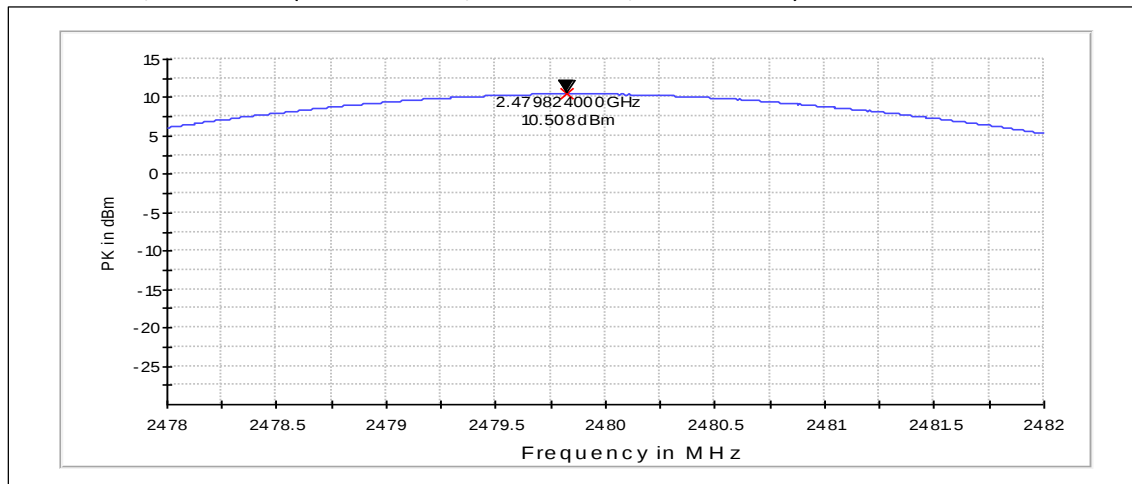

3. Band edge compliance of RF emissions (FCC 15.247(d), 15.205(b), RSS-210 A8.5)

EUT with DUT number	RM-1077, DUT 43243
Accessories with DUT numbers	BV-T5C, DUT 43244 ; AC-20E, DUT 43229 ; WH-108, DUT 43230
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	
Date of measurements	15-Dec-2014
Measured by	Timo Raiskio

3.1.1 Test setup

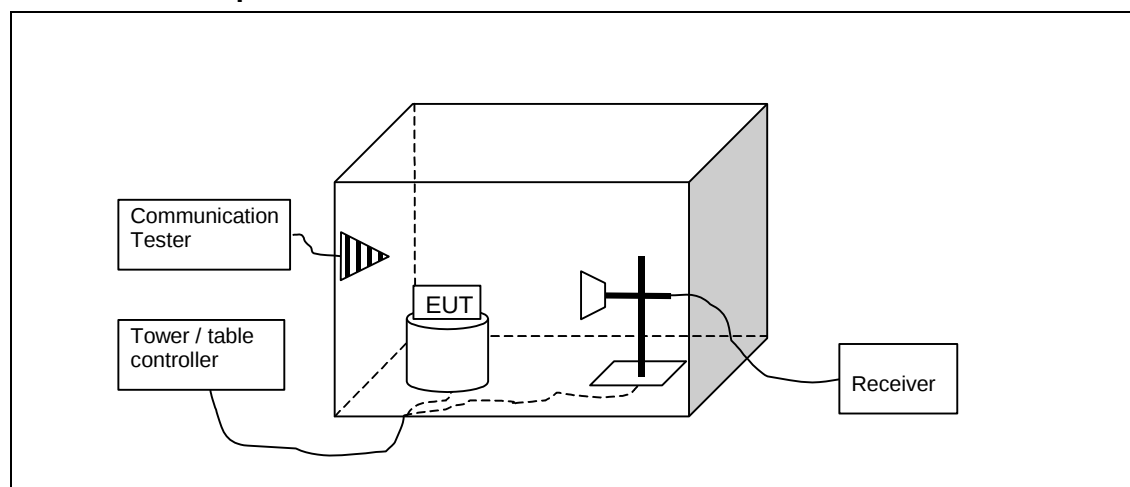

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit
Below 2390 and above 2483.5	54 dBuV/m (avg) and 74 dBuV/m (pk)
2390 - 2400	-20 dBc (pk)

3.3. Bluetooth test results

3.3.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

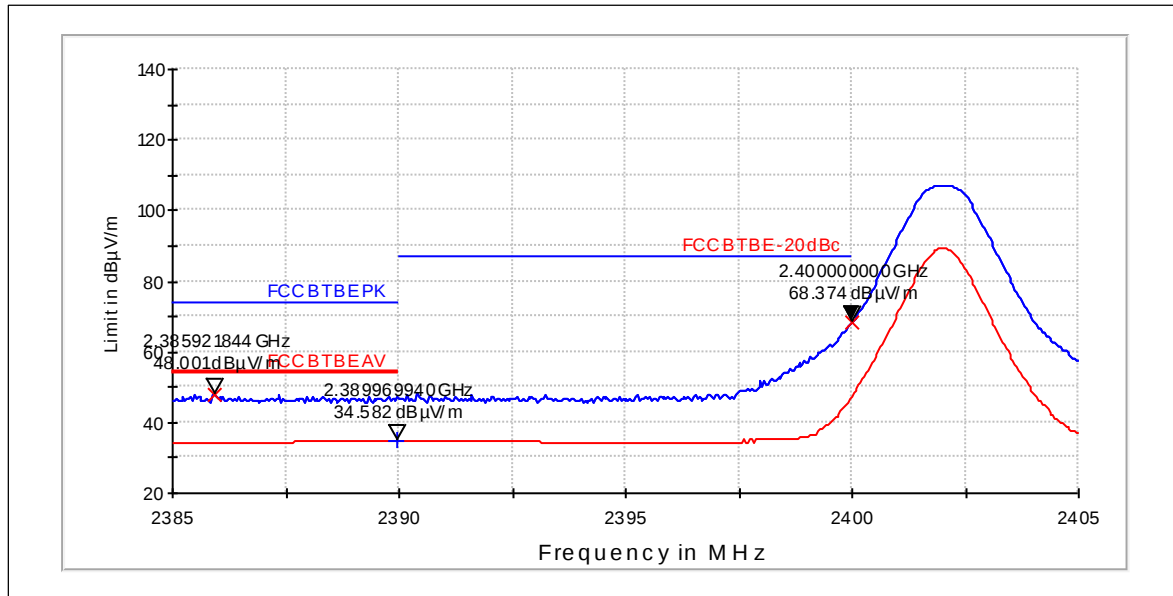


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2386	48	251.218	58.01	-10.01	PASSED
2400	68.37	2622.406	0	68.37	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2390	34.58	53.592	44.59	-10.01	PASSED

Hopping on. Low end.

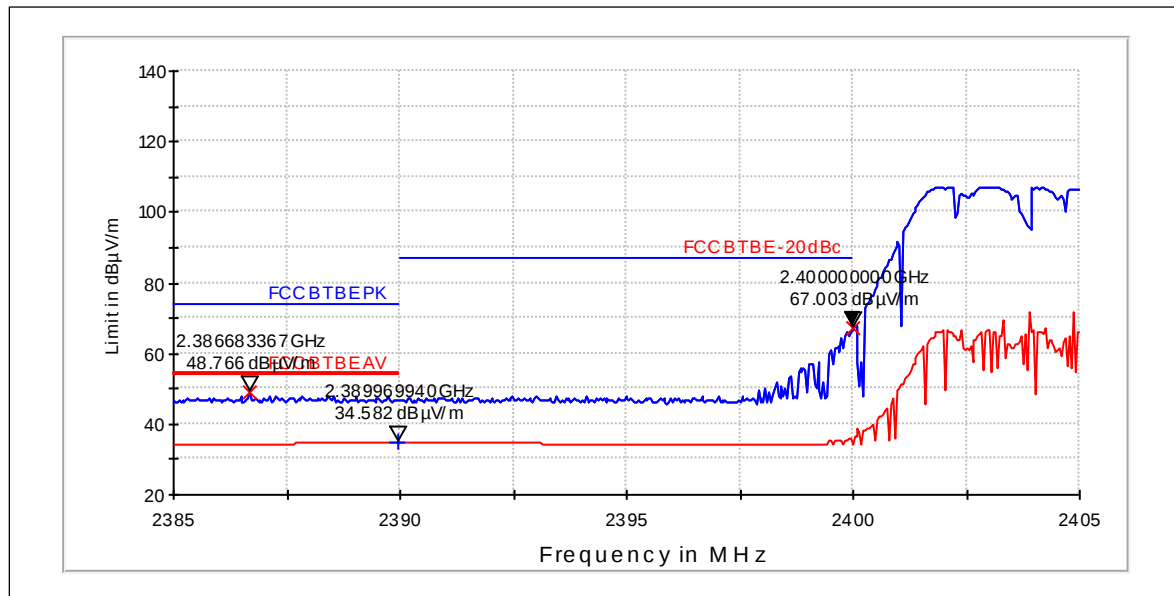


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2387	48.77	274.347	58.78	-10.01	PASSED
2400	67	2239.494	0	67	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2390	34.58	53.592	44.59	-10.01	PASSED

Channel 78 / 2480 MHz

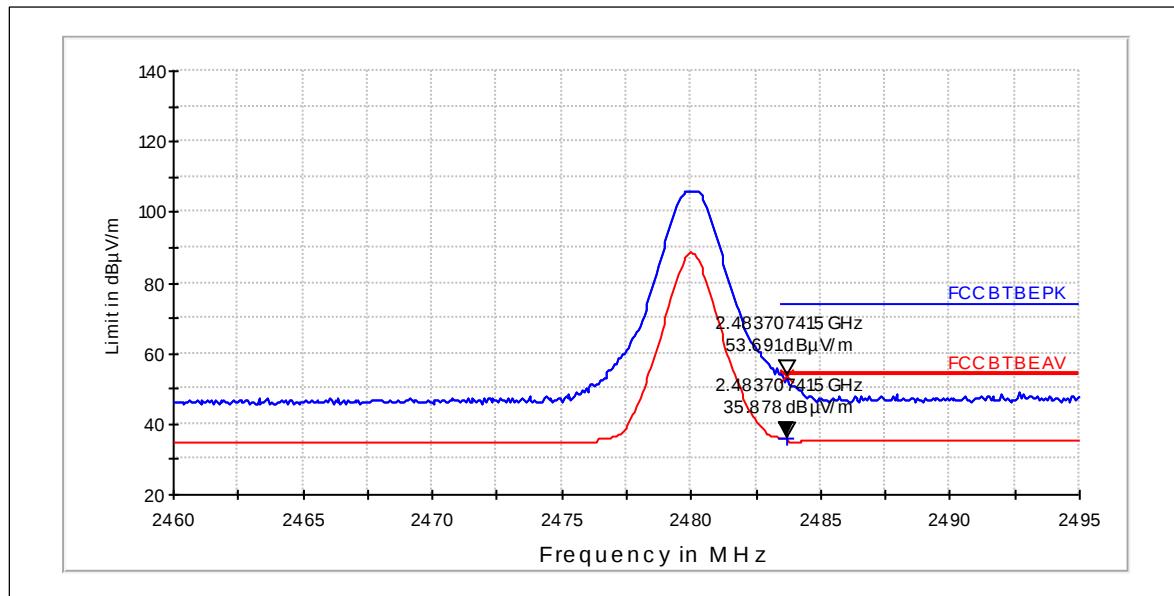


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2484	53.69	483.671	63.2	-9.51	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2484	35.88	62.216	45.39	-9.51	PASSED

Hopping on. High end.

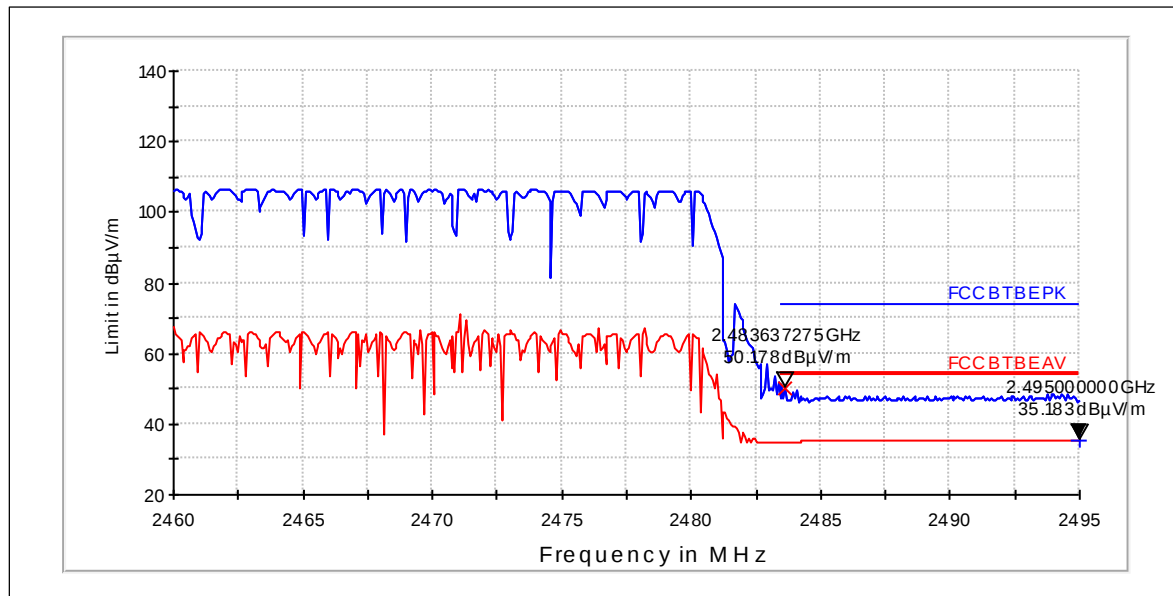

Peak (RBW: 1 MHz, VBW: 1 MHz)


Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2484	50.18	322.775	59.69	-9.51	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2495	35.18	57.431	44.69	-9.51	PASSED

3.3.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

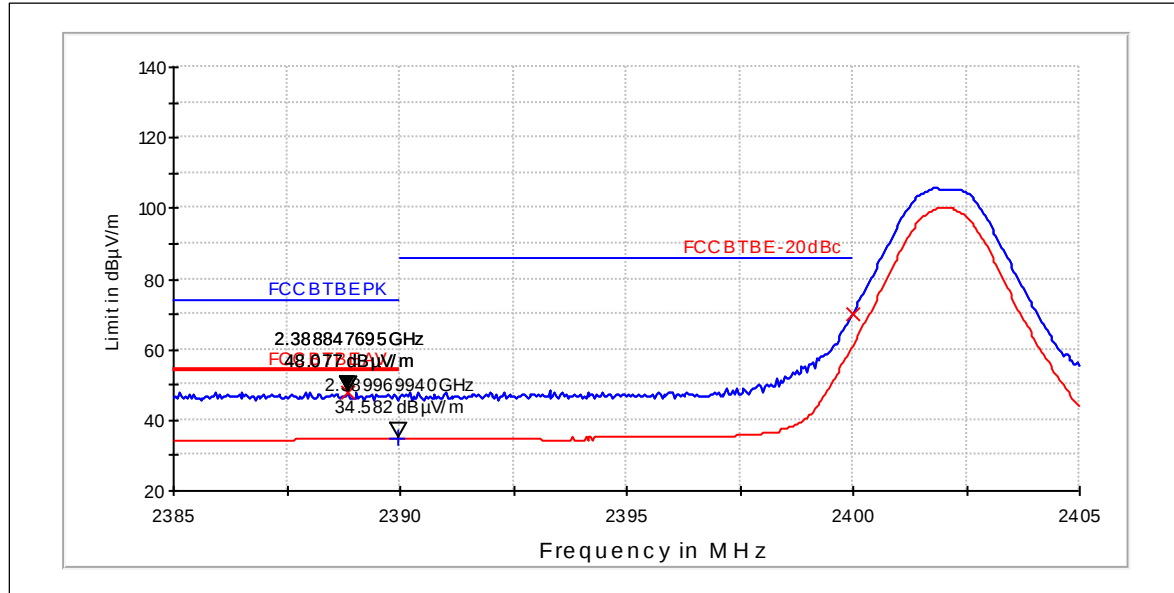


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2389	48.08	253.425	58.09	-10.01	PASSED
2400	70.22	3241.903	0	70.22	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2390	34.58	53.592	44.59	-10.01	PASSED

Hopping on. Low end.

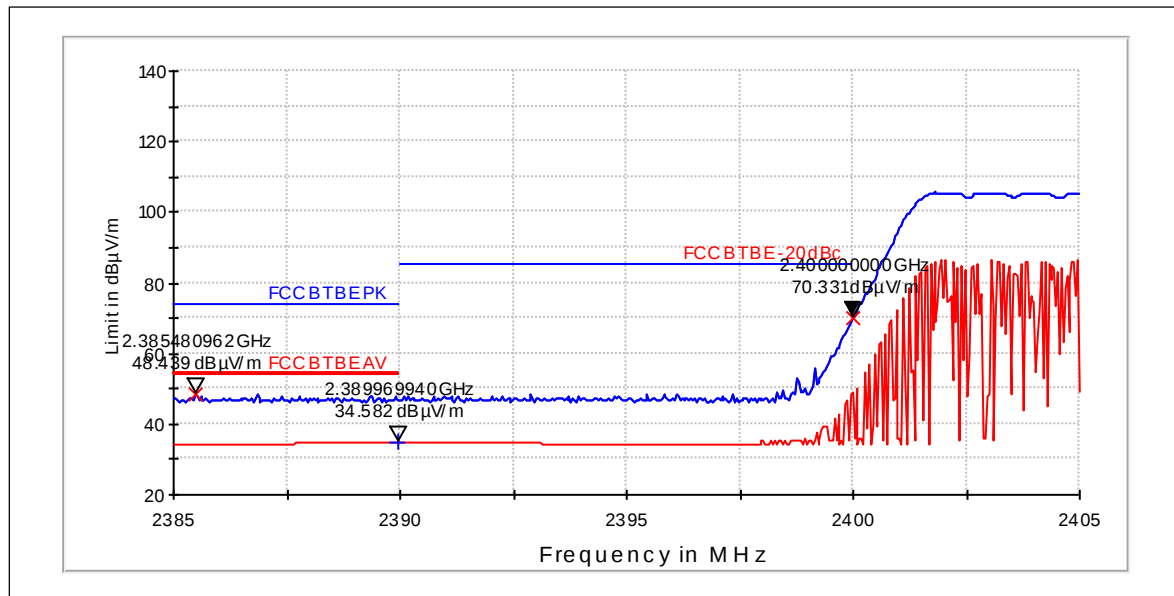


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2385	48.44	264.21	58.45	-10.01	PASSED
2400	70.33	3285.111	80.34	-10.01	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2390	34.58	53.592	44.59	-10.01	PASSED

Channel 78 / 2480 MHz

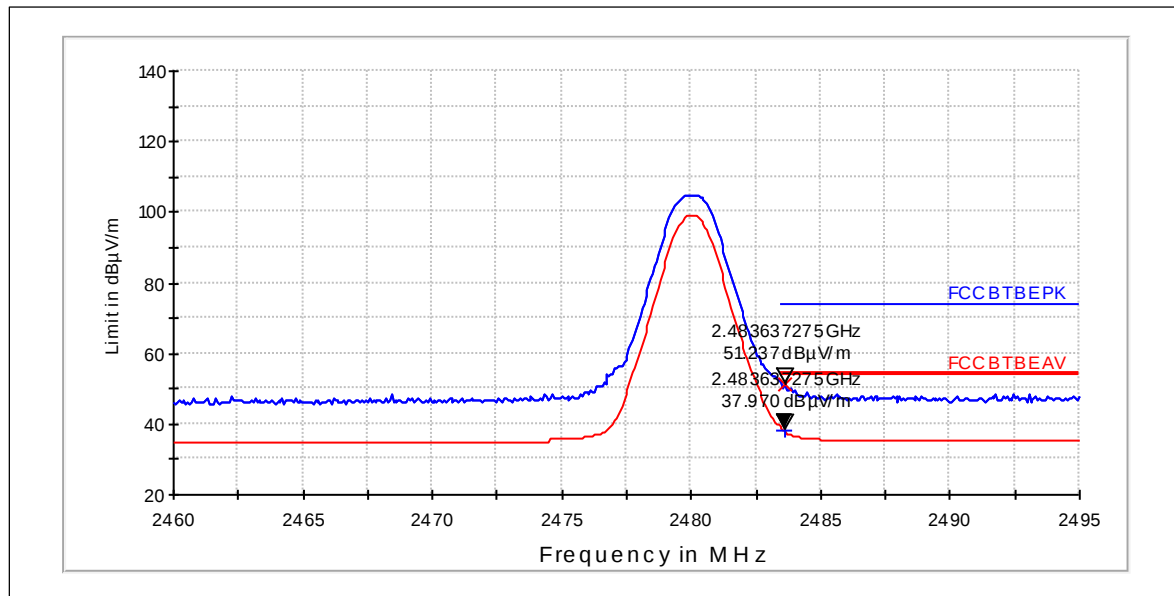


Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2484	51.24	364.628	60.75	-9.51	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2484	37.97	79.159	47.48	-9.51	PASSED

Hopping on. High end.

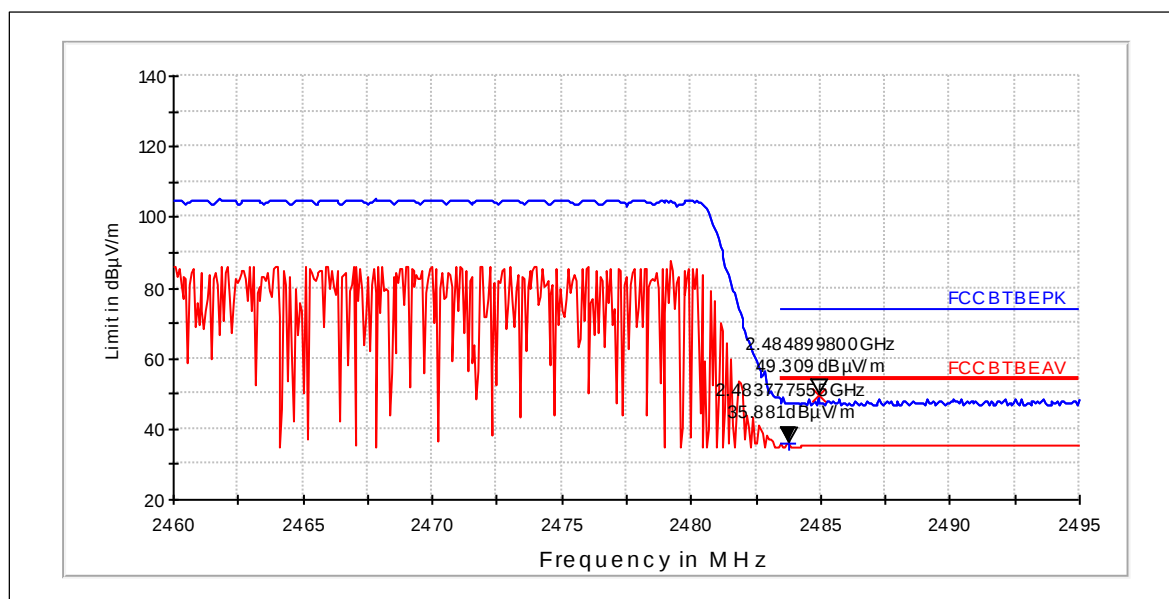

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2485	49.31	292.045	58.82	-9.51	PASSED


Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Results
2484	35.88	62.237	45.39	-9.51	PASSED

4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-1077, DUT 43247
Accessories with DUT numbers	BV-5TC, DUT 43239 ; AC-20E, DUT 43140 ; WH-108, DUT 43213
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	Test system RF Cond 2
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25 / 41 / 100.3
Date of measurements	15-Dec-2014
Measured by	Hannu Söderholm

4.1. Test Setup

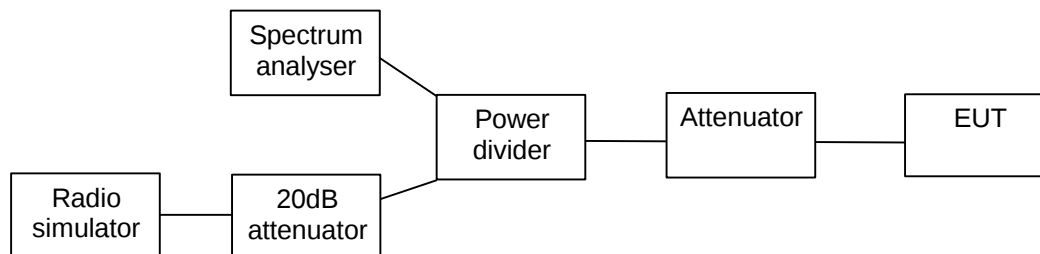

4.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

4.3. Bluetooth Test results

4.3.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

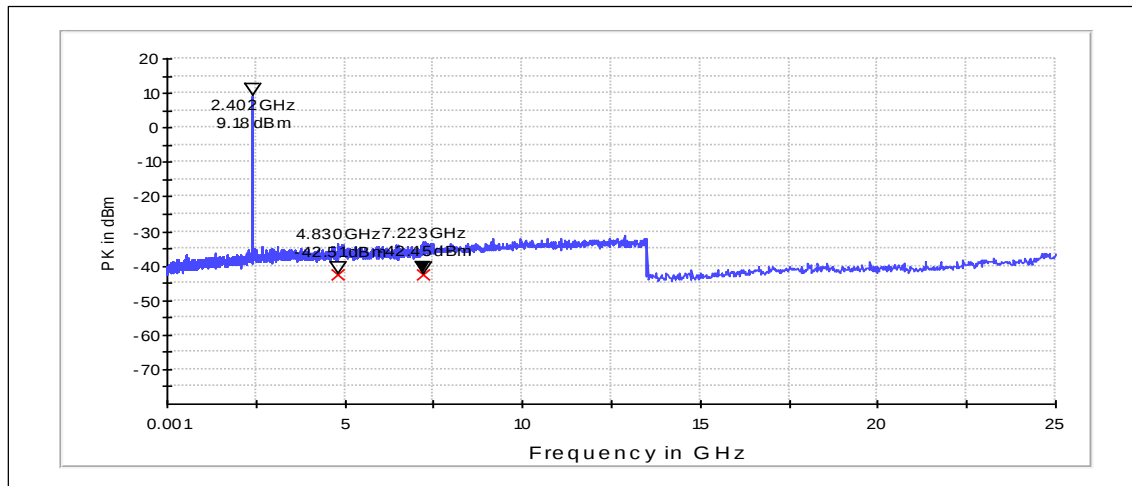

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4830.000	-42.51	PASSED
7222.800	-42.45	PASSED


Channel 40 / 2442 MHz

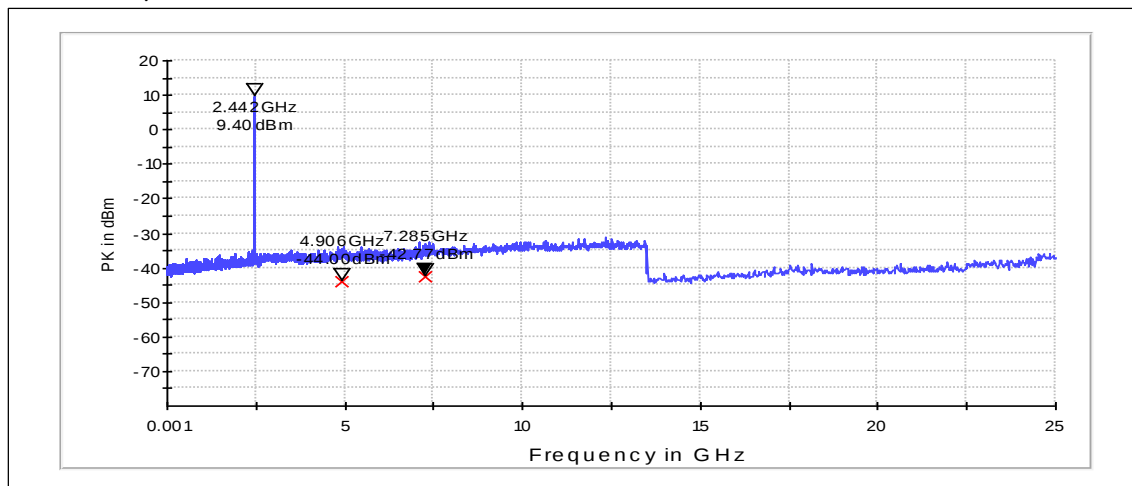

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4905.600	-44.00	PASSED
7285.200	-42.77	PASSED

Channel 78 / 2480 MHz

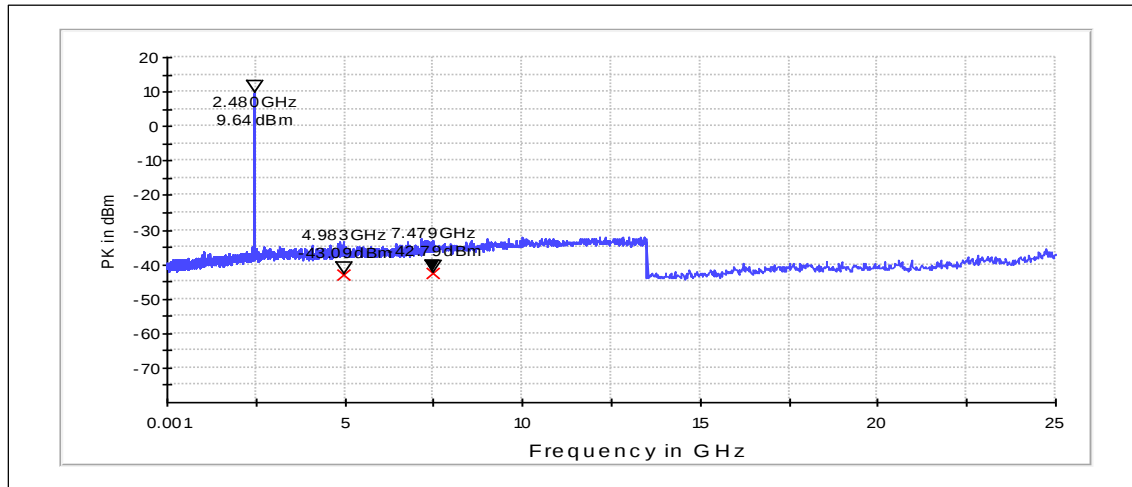


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4982.800	-43.09	PASSED
7479.000	-42.79	PASSED

4.3.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

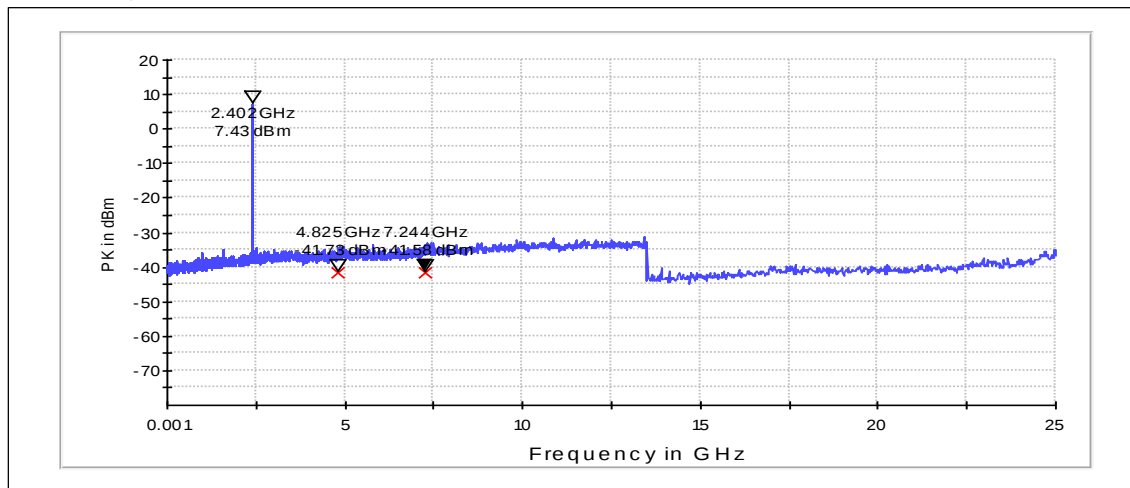

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4825.200	-41.73	PASSED
7243.800	-41.58	PASSED


Channel 40 / 2442 MHz

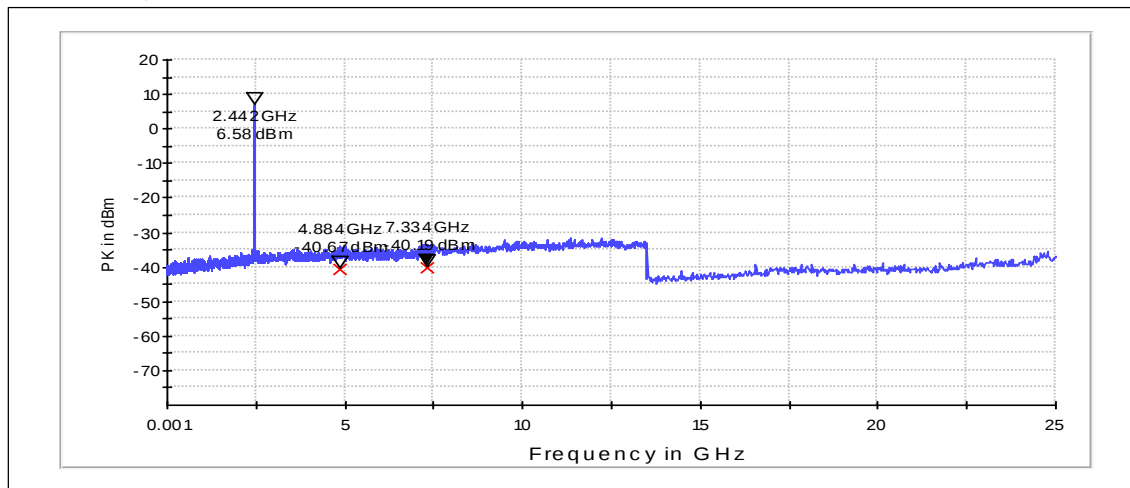

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4883.600	-40.67	PASSED
7334.400	-40.19	PASSED

Channel 78 / 2480 MHz

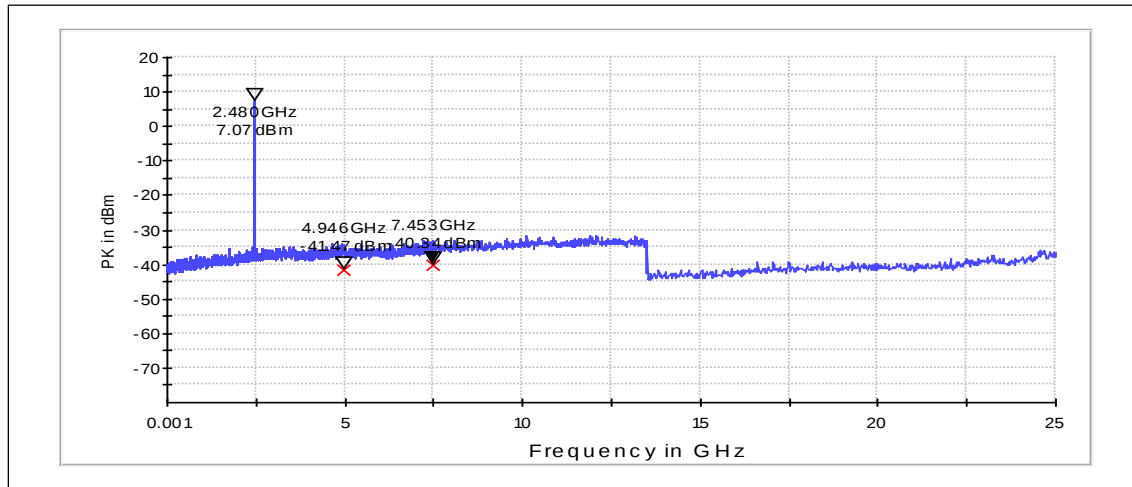


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4946.000	-41.47	PASSED
7453.200	-40.34	PASSED

5. AC powerline conducted emissions (FCC §15.207, RSS-210 7.2.4)

EUT with DUT number	RM-1077, DUT 43243
Accessories with DUT numbers	BV-T5C, DUT 43244 ; AC-20E, DUT 43229 ; WH-108, DUT 43230
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	
Date of measurements	18-Dec-2014
Measured by	Timo Raiskio

5.1. Test Setup



5.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

5.3. Bluetooth Test results

5.3.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

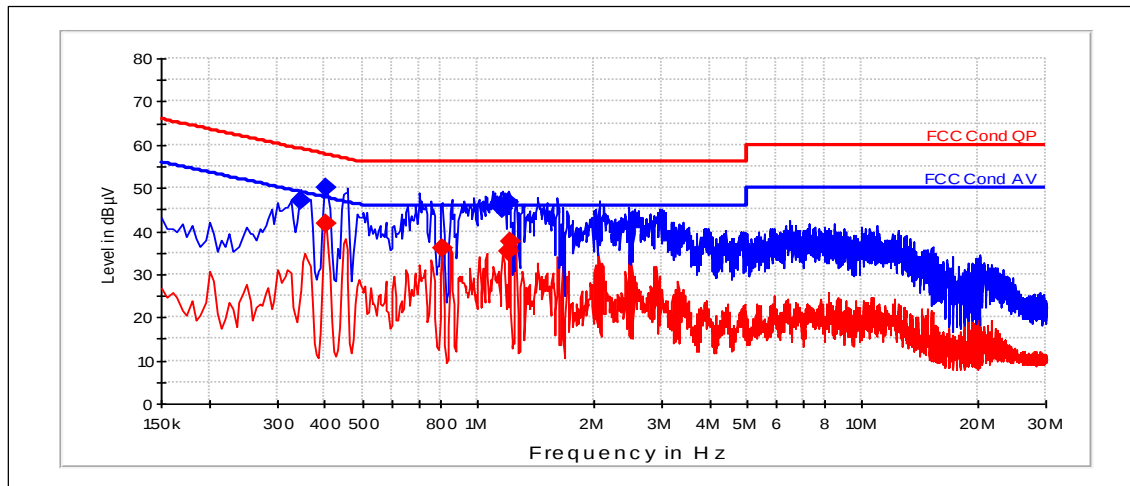

QuasiPeak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.345	47.15	L1	PASSED
0.405	49.91	L1	PASSED
1.145	45.92	L1	PASSED
1.16	45.26	N	PASSED
1.205	46.74	L1	PASSED


Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.405	41.79	L1	PASSED
0.805	35.94	L1	PASSED
1.205	35.37	L1	PASSED
1.21	37.7	L1	PASSED

6. Spurious radiated emissions (FCC 15.247(d), 15.209, RSS-210 A8.5)

EUT with DUT number	RM-1077, DUT 43243
Accessories with DUT numbers	BV-T5C, DUT 43244 ; AC-20E, DUT 43229 ; WH-108, DUT 43230
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	
Date of measurements	15-Dec-2014
Measured by	Timo Raiskio

6.1.1 Test setup

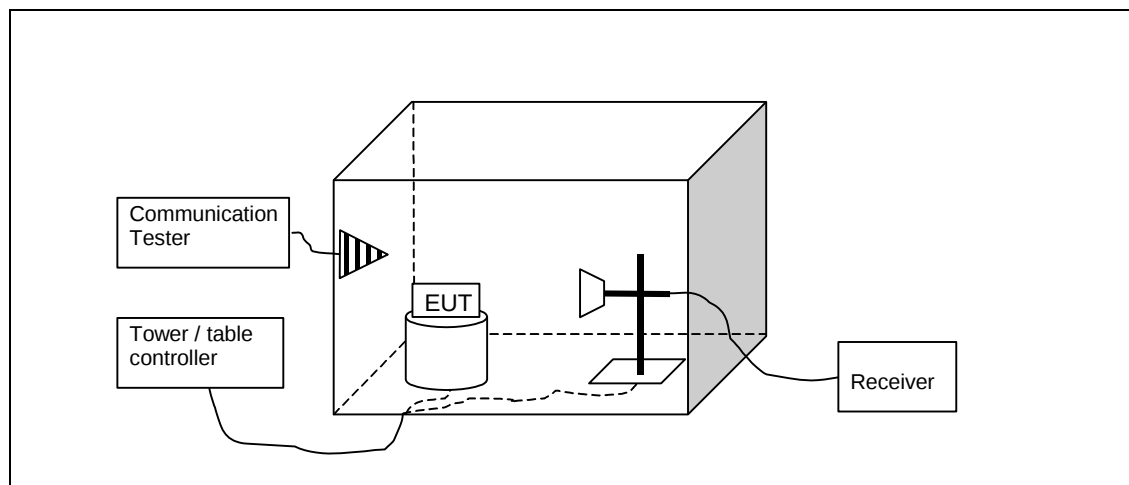

6.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:
The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.
The measurement is made up to 10th harmonic of the EUT highest TX channel.

The measurement results are obtained as described below:

$$E [dB\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.3. Bluetooth test results

6.3.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4804.1	42.41	131.978	47.01	-4.6	74	31.57	PASSED
7206.5	45.07	179.267	44.07	1	95	50.16	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4804.1	28.21	25.734	32.81	-4.6	54	25.77	PASSED
7206.5	31.69	38.415	30.69	1	---	---	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
30.09	23.15	14.371	43.75	-20.6	40	16.85	PASSED
30.18	22.35	13.107	43.05	-20.7	40	17.65	PASSED
35.458	23.2	14.454	46.1	-22.9	40	16.8	PASSED
36.946	27.09	22.62	50.59	-23.5	40	12.91	PASSED
36.952	27.83	24.632	51.33	-23.5	40	12.17	PASSED
37.899	26.36	20.797	50.26	-23.9	40	13.64	PASSED
39.663	22.81	13.82	47.31	-24.5	40	17.19	PASSED
911.065	38.37	82.89	53.87	-15.5	46	7.65	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4959.9	41.55	119.536	45.65	-4.1	74	32.43	PASSED
7440.3	44.57	169.239	42.67	1.9	74	29.41	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4959.9	28.23	25.793	32.33	-4.1	54	25.75	PASSED
7440.3	31.86	39.174	29.96	1.9	54	22.12	PASSED

6.3.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4803.9	40.91	111.045	45.51	-4.6	74	33.07	PASSED
7205.9	45.06	179.061	44.06	1	95	50.17	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4803.9	28.19	25.674	32.79	-4.6	54	25.79	PASSED
7205.9	31.7	38.459	30.7	1	---	---	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
32.728	17.13	7.186	38.93	-21.8	40	22.87	PASSED
34.132	14.88	5.546	37.28	-22.4	40	25.12	PASSED
37.066	16	6.31	39.5	-23.5	40	24	PASSED
38.559	19.04	8.954	43.14	-24.1	40	20.96	PASSED
39.663	14.08	5.058	38.58	-24.5	40	25.92	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3904.711	38.17	81.003	45.27	-7.1	74	35.81	PASSED
10659.315	49.17	287.409	42.47	6.7	74	24.81	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
3904.711	25.18	18.155	32.28	-7.1	54	28.8	PASSED
10659.315	36.35	65.69	29.65	6.7	54	17.63	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4960.2	41.44	118.032	45.54	-4.1	74	32.54	PASSED
7438.2	44.92	176.198	43.02	1.9	74	29.06	PASSED


Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Limit [dBμV/m]	Margin	Results
4960.2	28.77	27.447	32.87	-4.1	54	25.21	PASSED
7438.2	31.73	38.592	29.83	1.9	54	22.25	PASSED

7. 20dB(bandwidth) (FCC §15.247(a)(1), RSS-210 A8.1(a))

EUT with DUT number	RM-1077, DUT 43247
Accessories with DUT numbers	BV-5TC, DUT 43239 ; AC-20E, DUT 43140 ; WH-108, DUT 43213
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	Test system RF Cond 2
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25 / 41 / 100.3
Date of measurements	15-Dec-2014
Measured by	Hannu Söderholm

7.1. Test Setup

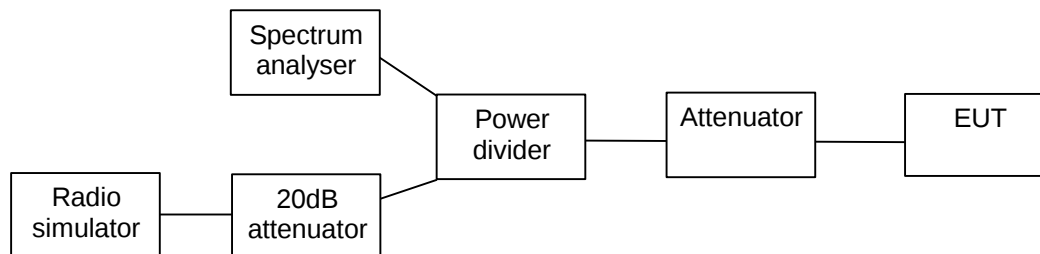

7.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

7.3. Bluetooth Test results


7.3.1 GFSK modulation, PRBS packet type

Channel / f _c [MHz]	20 dB bandwidth [kHz]
0 / 2402	820.5
40 / 2442	823.7
78 / 2480	820.5


0 / 2402

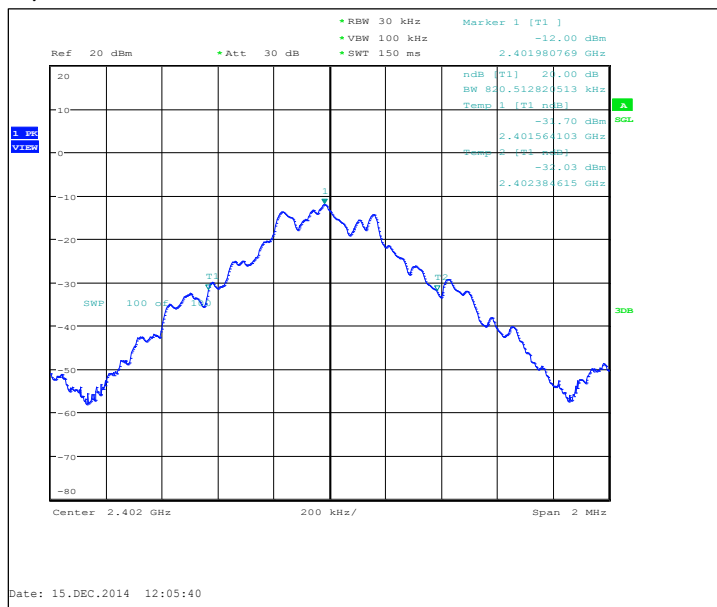

40 / 2442

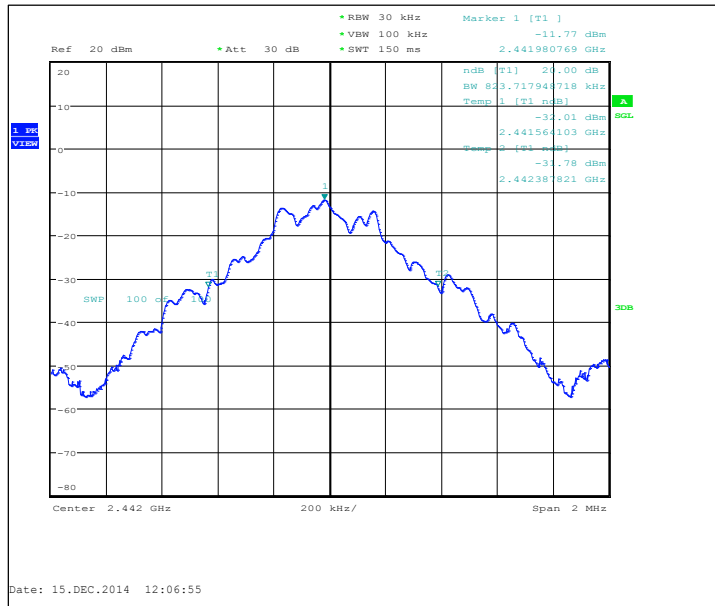


78 / 2480

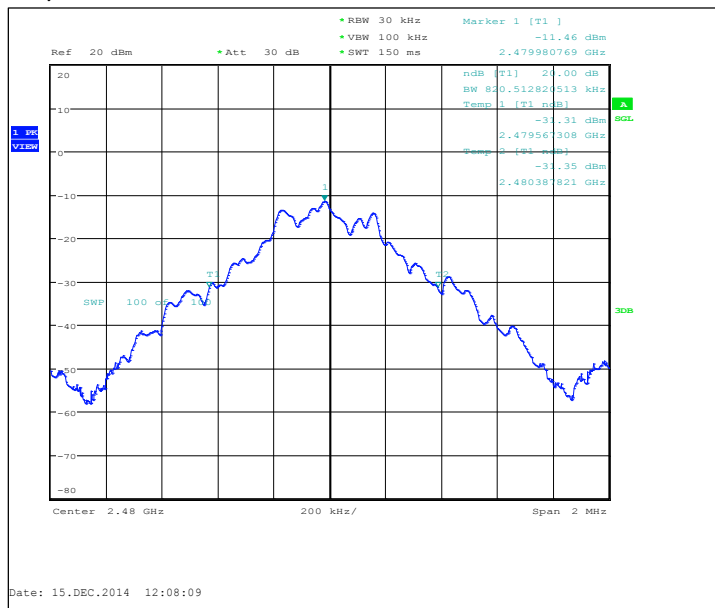


7.3.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]
0 / 2402	1301.3
40 / 2442	1301.3
78 / 2480	1301.3


0 / 2402

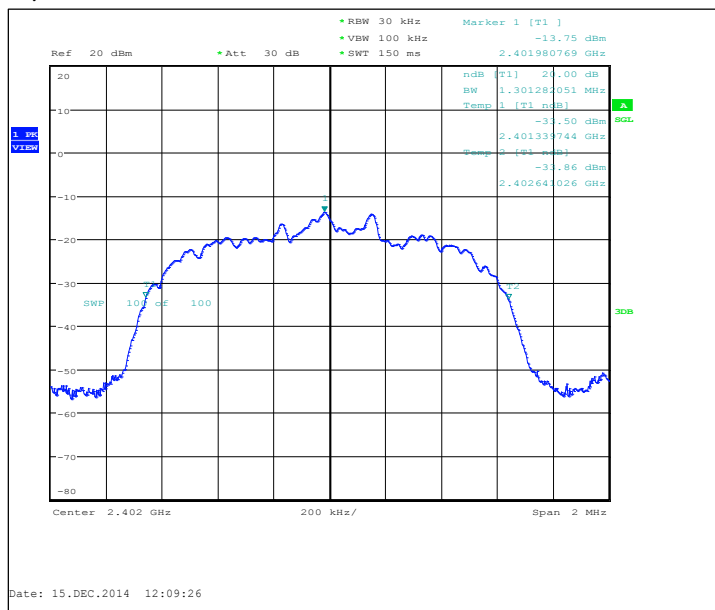

40 / 2442

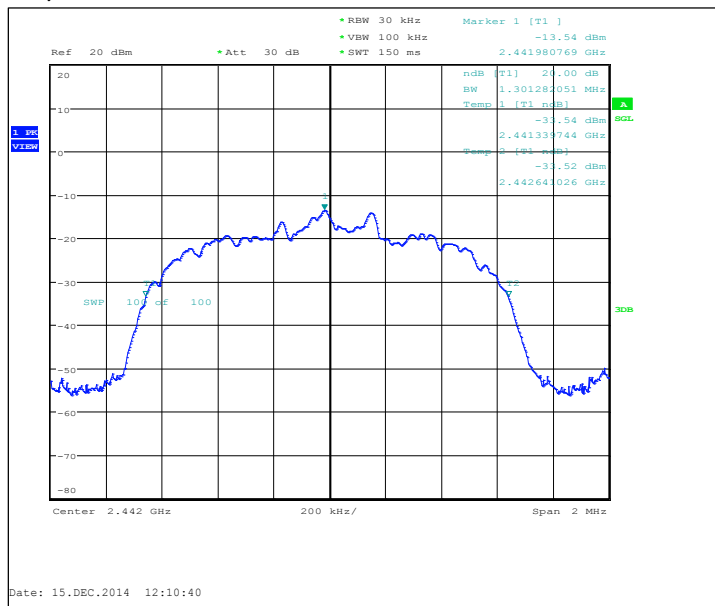


78 / 2480

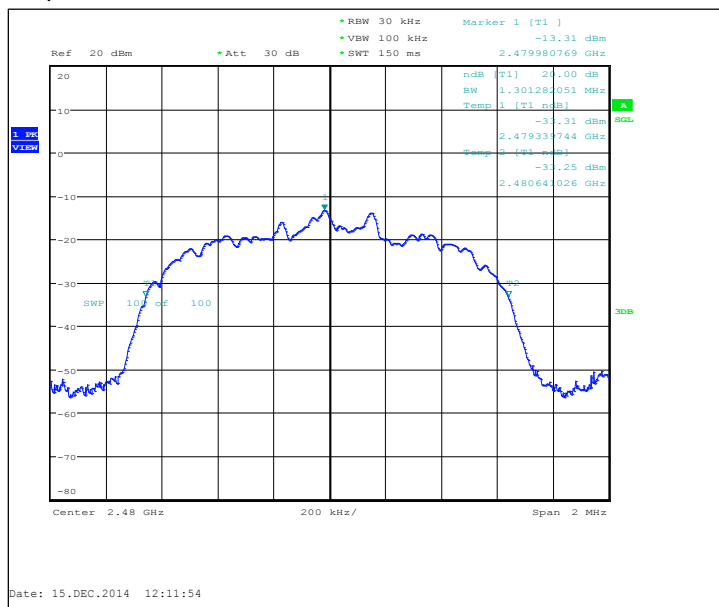

8. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1(b))

EUT with DUT number	RM-1077, DUT 43247
Accessories with DUT numbers	BV-5TC, DUT 43239 ; AC-20E, DUT 43140 ; WH-108, DUT 43213
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	Test system RF Cond 2
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25 / 41 / 100.3
Date of measurements	15-Dec-2014
Measured by	Hannu Söderholm

8.1. Test Setup

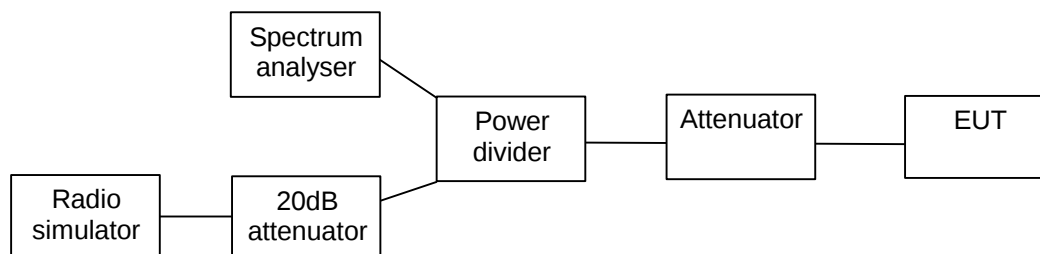

8.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

8.3. Bluetooth Test results

8.3.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
993.6	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

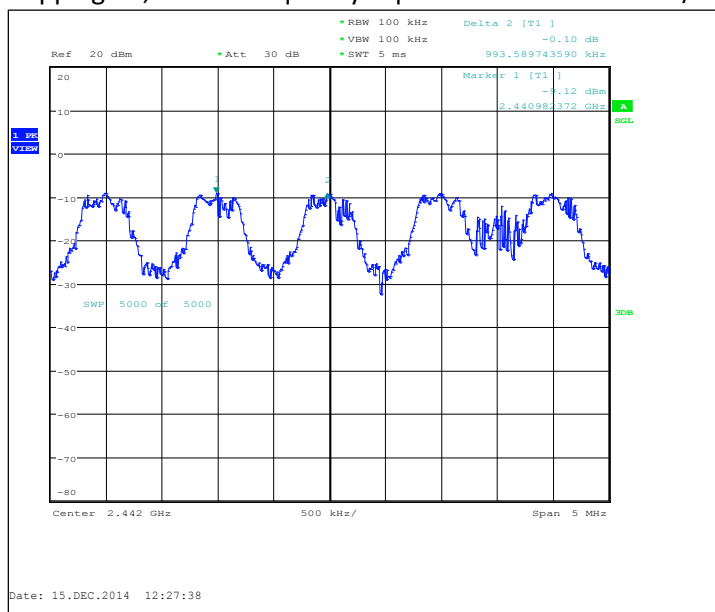

8.3.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1017.6	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

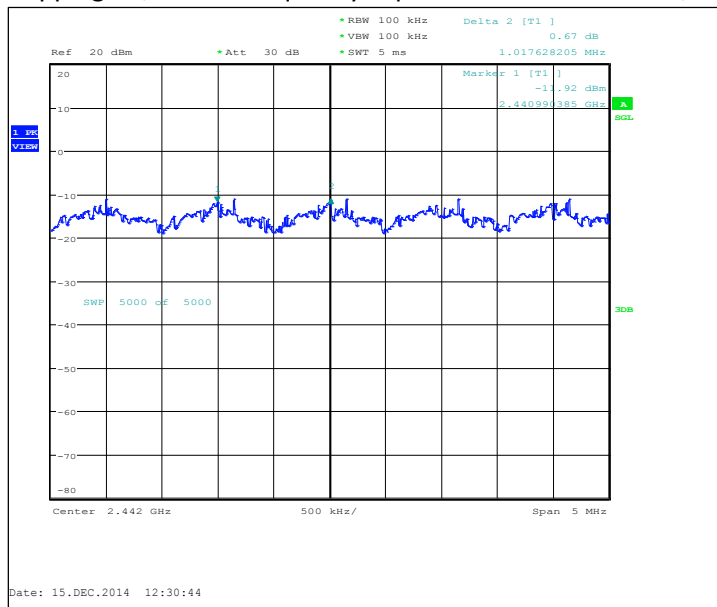

9. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1(d))

EUT with DUT number	RM-1077, DUT 43247
Accessories with DUT numbers	BV-5TC, DUT 43239 ; AC-20E, DUT 43140 ; WH-108, DUT 43213
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	Test system RF Cond 2
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25 / 41 / 100.3
Date of measurements	15-Dec-2014
Measured by	Hannu Söderholm

9.1. Test Setup

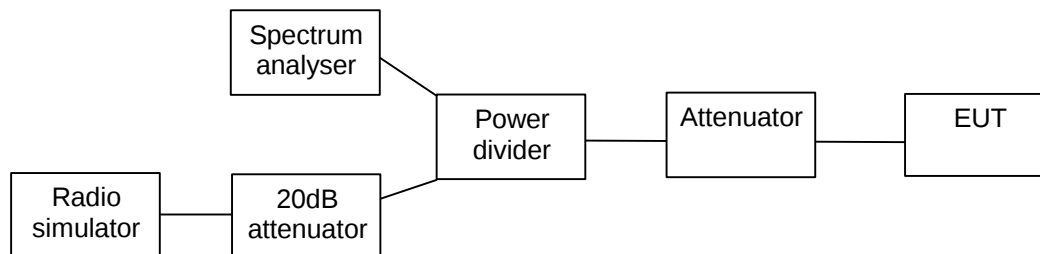

9.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

9.3. Bluetooth Test results

9.3.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED


Hopping on, number of hopping frequencies

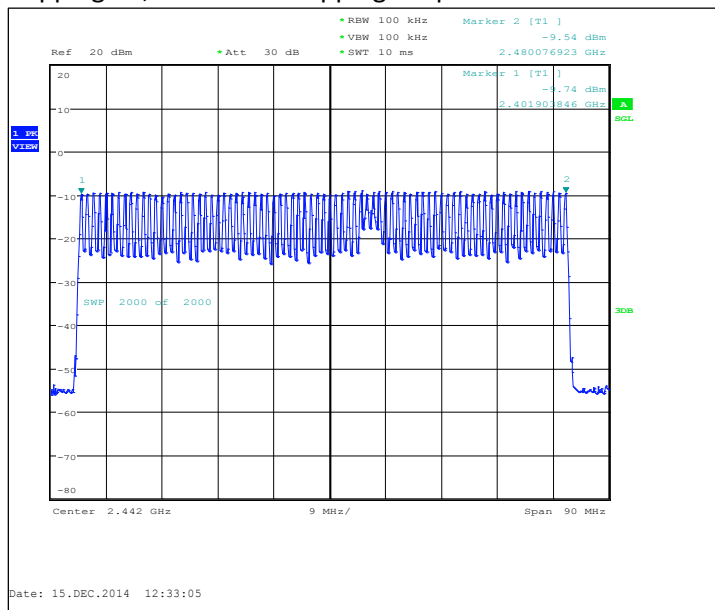

9.3.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
78	PASSED


Hopping on, number of hopping frequencies

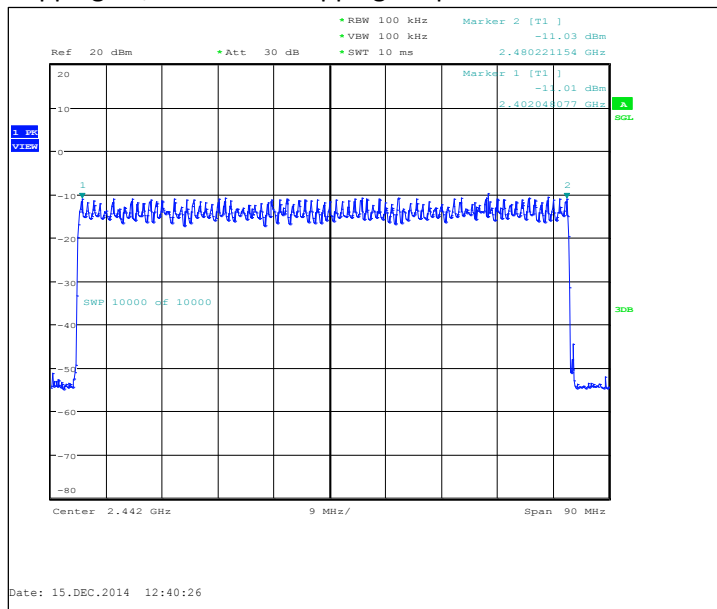

10. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1(d))

EUT with DUT number	RM-1077, DUT 43247
Accessories with DUT numbers	BV-5TC, DUT 43239 ; AC-20E, DUT 43140 ; WH-108, DUT 43213
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	Test system RF Cond 2
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25 / 41 / 100.3
Date of measurements	15-Dec-2014
Measured by	Hannu Söderholm

10.1. Test Setup

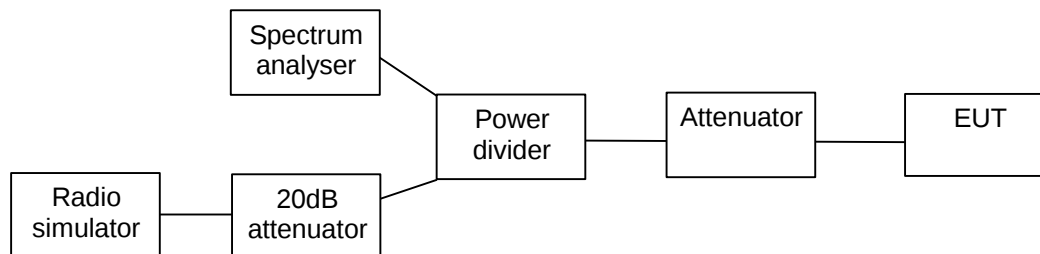

10.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
<= 0.4

10.3. Bluetooth Test results


10.3.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ms]	Time of occupancy [s]	Result
84	2.917	0.245	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

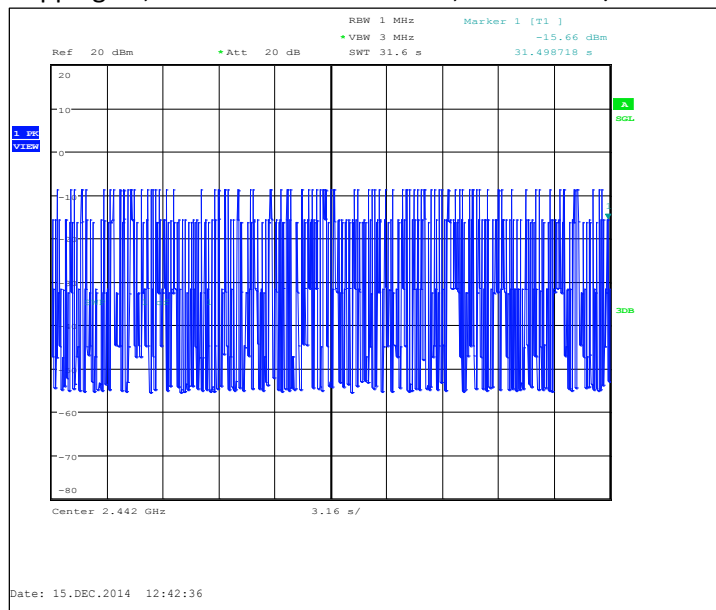


Hopping on, duration of one transmission, channel 40 / 2442 MHz

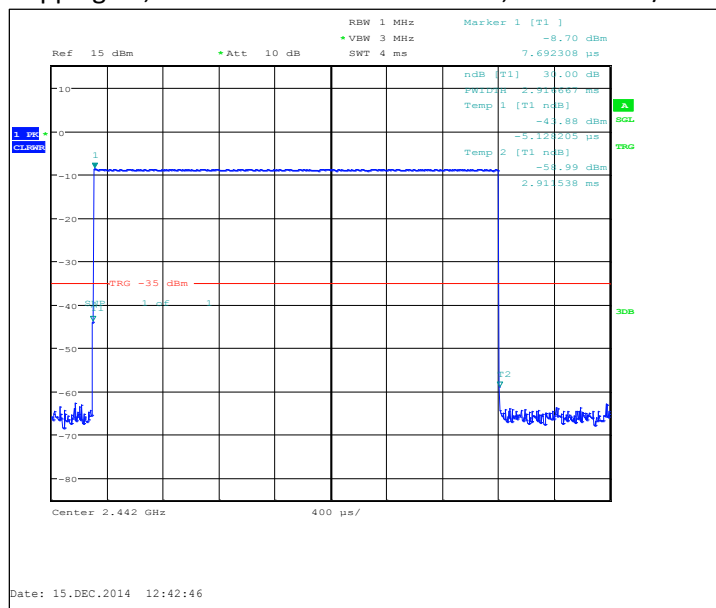


10.3.2 8DPSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ms]	Time of occupancy [s]	Result
97	0.801	0.078	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

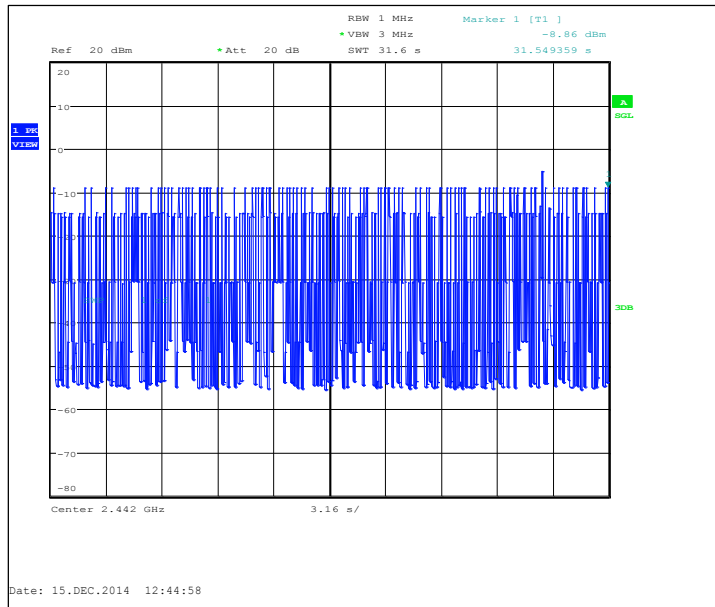

Hopping on, duration of one transmission, channel 40 / 2442 MHz

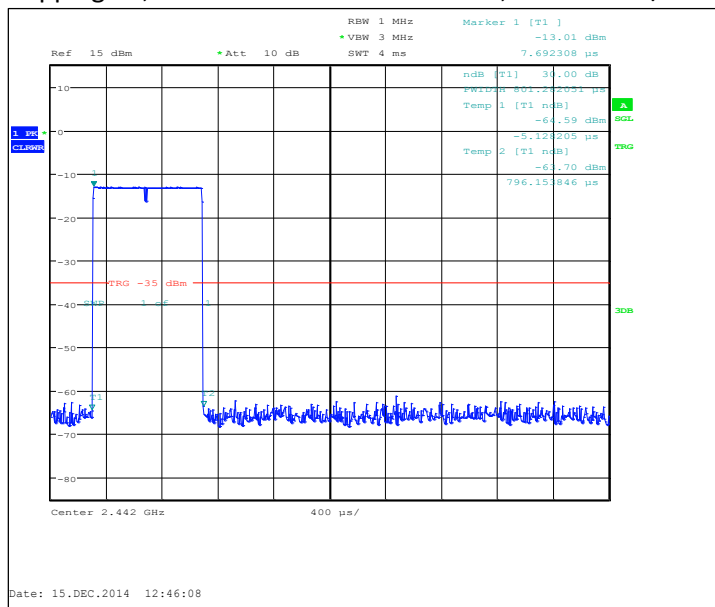

11. Test Equipment

11.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C, 15E
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15E
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C, 15E
TM23007	Oscilloscope	TDS684B	Tektronix	15E
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24/27
2001	Bluetooth tester	CBT	R&S	15C, 15B
2009	LISN 50 μ H	ENV216	R&S	15C, 15B
2010	LISN 50 μ H	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C
2019	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2020	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2021	Communication Tester	CMW500	R&S	22/24/27
2022	Communication Tester	CMU200	R&S	22/24/27
2023	Spectrum Analyzer	ESMI-RF	R&S	15B/15C
2024	Analyzer display unit	ESAI-D	R&S	15B/15C
2026	Signal Generator	SMF 100A	R&S	22/24/27, 15C, 15E, 15B
-	Bluetooth tester	CBT	R&S	15C, 15B

11.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15E, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15E, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15E, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15E, 15B
-	RF system panel	OSP130	R&S	22/24/27, 15C, 15E, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chamber	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15E, 15B
TM38066	High pass filter	WHKX3.0/18G-12SS	Wainwright	22/24/27, 15C, 15E, 15B
2028	High pass filter	WHKX 1.0/15G-12SS	Wainwright	22/24/27, 15C, 15E, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRCD1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
TM23892	Controller	G-1000SDX	Yaesu	22/24/27, 15C, 15E
2001	Bluetooth tester	CBT	R&S	15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27
2021	Communication Tester	CMW500	R&S	22/24/27
2025	Antenna	HFH2-Z2	R&S	15C
2026	Signal Generator	SMF 100A	R&S	22/24/27, 15C, 15E, 15B
2052	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C, 15B, 15E
-	Antenna	QSH18S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Antenna	QSH20S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Antenna	QSH20S20	Q-Par	22/24/27, 15C, 15B, 15E
-	Bluetooth tester	CBT	R&S	15C, 15B