

TEST REPORT

Test Report No.: 1-7605/14-01-02-B



Deutsche
Akreditierungsstelle
D-PL-12076-01-00

Testing Laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 – 10

66117 Saarbrücken/Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>

e-mail: ict@cetecom.com

Accredited Test Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-00

Applicant

Microsoft

P.O. Box 68

Sinitaival 5

FIN-33721 TAMPERE, FINLAND

Juha Paukku

Juha.Paukku@microsoft.com

Tel. +358 (0) 7180 08000

Fax. +358 (0) 7180 46880

Manufacturer

Microsoft

P.O. Box 68

Sinitaival 5

FIN-33721 TAMPERE, FINLAND

Test Standard/s

IEEE 1528-2003

Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques

RSS-102 Issue 4

Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:

GSM -Smartphone

Device type:

portable device

Model name:

RM-1077

S/N serial number:

N/A

FCC-ID:

PYARM-1077

IMEI-Number:

004402740214105 / 004402740213909 / 004402740214287

Hardware status:

1520

Software status:

02149.00000.14441.39000

Frequency:

see technical details

Antenna:

integrated antenna

Battery option:

BV-T5C

Accessories:

Headset WH-108

Test sample status:

identical prototype

Exposure category:

general population / uncontrolled environment


This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test Report authorised:



Oleksandr Hnatovskiy
Radio Communications & EMC

Test performed:



Marco Scigliano
Radio Communications & EMC

1 Table of contents

1	Table of contents	2
2	General information	4
2.1	Notes and disclaimer	4
2.2	Application details	4
2.3	Statement of compliance	4
2.4	Technical details	5
2.5	Transmitter and Antenna Operating Configurations	6
3	Test standards/ procedures references	7
3.1	RF exposure limits	9
4	Summary of Measurement Results	10
4.1	Maximum measured and reported SAR values for Head configuration	10
4.2	Maximum measured and reported SAR values for body worn configuration	11
4.3	Maximum measured and reported SAR values for hotspot configuration	11
4.4	SAR measurement variability and measurement uncertainty analysis	12
5	Test Environment	12
6	Test Set-up	13
6.1	Measurement system	13
6.1.1	System Description	13
6.1.2	Test environment	14
6.1.3	Probe description	14
6.1.4	Phantom description	15
6.1.5	Device holder description	16
6.1.6	Scanning procedure	17
6.1.7	Spatial Peak SAR Evaluation	18
6.1.8	Data Storage and Evaluation	19
6.1.9	Tissue simulating liquids: dielectric properties	21
6.1.10	Tissue simulating liquids: parameters	22
6.1.11	Measurement uncertainty evaluation for SAR test	23
6.1.12	Measurement uncertainty evaluation for System Check	26
6.1.13	System check	27
6.1.14	System check procedure	28
6.1.15	System validation	29
7	Detailed Test Results	30
7.1	Conducted power measurements	30
7.1.1	Conducted power measurements GSM 850 MHz	31
7.1.2	Conducted power measurements GSM 1900 MHz	32
7.1.3	Justification of SAR measurements in GSM mode	32
7.1.4	Conducted power measurements WCDMA FDD V (850 MHz)	33
7.1.5	Conducted power measurements WCDMA FDD II (1900 MHz)	33
7.1.6	Test-set-up information for WCDMA / HSPA / HSUPA	34
7.1.7	Conducted power measurements WLAN 2450 MHz	38
7.1.7.1	Earpiece 'ON'	38
7.1.7.2	Earpiece 'OFF'	39
7.1.8	Standalone SAR Test Exclusion	40
7.1.9	Hotspot mode SAR measurement positions	41
7.2	SAR test results	42
7.2.1	General description of test procedures	42
7.2.2	Results overview	43
7.2.3	Multiple Transmitter Information	48
7.2.4	SAR peak location separation	51

8	Test equipment and ancillaries used for tests	54
9	Observations	54
Annex A:	System performance check	55
Annex B:	DASY5 measurement results	62
	Annex B.1: GSM 850MHz	62
	Annex B.2: GSM 1900MHz	65
	Annex B.3: UMTS FDD II	68
	Annex B.4: UMTS FDD V	71
	Annex B.5: WLAN 2450MHz	75
	Annex B.6: Combined Multi Band Fast SAR	78
	Annex B.7: Liquid depth	84
Annex C:	Photo documentation	87
Annex D:	Calibration parameters	87
Annex E:	Document History	88
Annex F:	Further Information	88

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

2.2 Application details

Date of receipt of order:	2014-11-26
Date of receipt of test item:	2014-12-09
Start of test:	2014-12-10
End of test:	2014-12-23
Person(s) present during the test:	

2.3 Statement of compliance

The SAR values found for the RM-1077 GSM -Smartphone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1 g tissue according to the FCC rule §2.1093, the ANSI/IEEE C 95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Health Canada's Safety Code 6 and the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15 mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

According to KDB pub 941225 D06 this device has been tested with 10 mm distance to the phantom for operation in WLAN hot spot mode.

2.4 Technical details

Band tested for this test report	Technology	Lowest transmit frequency/MHz	Highest transmit frequency/MHz	Lowest receive Frequency/MHz	Highest receive Frequency/MHz	Kind of modulation	Power Class	Tested power control level	GPRS/EGPRS mobile station class	GPRS/EGPRS multislot class	(E)GPRS voice mode or DTM	Test channel low	Test channel middle	Test channel high	Maximum output power/dBm)*
<input type="checkbox"/>	GSM	880.2	914.8	925.2	959.8	GMSK 8-PSK	4 E2	5	B	33	no	975	37	124	--
<input type="checkbox"/>	GSM DCS	1710.2	1784.8	1805.2	1879.8	GMSK 8-PSK	1 E2	0	B	33	no	512	698	885	--
<input checked="" type="checkbox"/>	GSM cellular	824.2	848.8	869.2	893.8	GMSK 8-PSK	4 E2	5	B	33	no	128	190	251	32.6
<input checked="" type="checkbox"/>	GSM PCS	1850.2	1909.8	1930.2	1989.8	GMSK 8-PSK	1 E2	0	B	33	no	512	661	810	29.8
<input type="checkbox"/>	UMTS FDD I	1922.4	1977.6	2112.4	2167.6	QPSK	3	max	--	--	--	9612	9750	9888	--
<input checked="" type="checkbox"/>	UMTS FDD II	1852.4	1907.6	1932.4	1987.6	QPSK	3	max	--	--	--	9262	9400	9538	23.1
<input checked="" type="checkbox"/>	UMTS FDD V	826.4	846.6	871.4	891.6	QPSK	3	max	--	--	--	4132	4182	4233	23.5
<input type="checkbox"/>	UMTS FDD VIII	882.4	912.6	927.4	957.6	QPSK	3	max	--	--	--	2712	2788	2863	--
<input type="checkbox"/>	WLAN	2412	2472	2412	2472	CCK OFDM	--	max	--	--	--	1	7	13	--
<input checked="" type="checkbox"/>	WLAN US	2412	2462	2412	2462	CCK OFDM	--	max	--	--	--	1	6	11	18.5
<input type="checkbox"/>	BT	2402	2480	2402	2480	GFSK	3	max	--	--	--	0	39	78	9.74

)*: measured slotted peak power for GSM, averaged max. RMS power for UMTS, WLAN and BT.

supported UMTS features	category	remarks
Release 8 DC-HSDPA	24	42.2 Mbit/s
Release 7 HSDPA	14	21.1 Mbit/s
Release 6 HSUPA	6	no MIMO, 5.76 Mbit/s

2.5 Transmitter and Antenna Operating Configurations

Simultaneous transmission conditions		
GSM / GPRS / EDGE / DTM	+	BT/BLE ¹
GSM / GPRS / EDGE / DTM	+	WLAN 2.4GHz
UMTS / HSPA	+	BT/BLE
UMTS / HSPA	+	WLAN 2.4GHz

Table 1: Simultaneous transmission conditions

Note: BT and WLAN can be active at the same time, but only with interleaving of packages switched on board level. That means that they don't transmit at the same time.

BLE¹ - Bluetooth low energy

3 Test standards/ procedures references

Test Standard	Version	Test Standard Description
IEEE 1528-2003	2003-04	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE 1528-2013	2014-06	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
RSS-102 Issue 4	2010-03	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
Canada's Safety Code No. 6	99-EHD-237	Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz
IEEE Std. C95-3	2002	IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave
IEEE Std. C95-1	1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
IEC 62209-2	2010	Human exposure to radio frequency fields from hand-held and bodymounted wireless communication devices. Human models, instrumentation, and procedures. Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)

FCC KDBs:

KDB 865664D01v01	February 7, 2014	FCC OET SAR measurement requirements 100 MHz to 6 GHz
KDB 865664D02v01	May 28, 2013	RF Exposure Compliance Reporting and Documentation Considerations
KDB 447498D01v05	February 7, 2014	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
KDB 648474D04v01	December 4, 2013	SAR Evaluation Considerations for Wireless Handsets
KDB 941225D01v02	October, 2007	SAR Measurements Procedures for 3G Devices
KDB 941225D02v01	December 14, 2009	3GPP R6 HSPA and R7 HSPA+ SAR Guidance
KDB 941225D02v02	May 28, 2013	SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced
KDB 941225D04v01	January 27, 2010	Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode
KDB 941225D03v01	December, 2008	SAR Test Reduction Procedure for GSM/GPRS/EDGE
KDB 941225D06v01	May 28, 2013	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
KDB 248227D01v01	May 29, 2007	SAR Measurement Procedures for 802.11 a/b/g Transmitters
KDB 450824D01v01	January, 2007	SAR Probe Calibration and System Verification considerations for measurements from 150 MHz to 3 GHz
KDB 450824D02v01	April 4, 2012	Dipole Requirements for SAR System Validation and Verification

3.1 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain and Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 2: RF exposure limits

The limit applied in this test report is shown in bold letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

4 Summary of Measurement Results

<input checked="" type="checkbox"/>	No deviations from the technical specifications ascertained		
<input type="checkbox"/>	Deviations from the technical specifications ascertained		
Maximum SAR value reported for 1g (W/kg)			
	PCE	DTS	UNII
head	1.053	0.814	---
body worn 15 mm distance	0.959	0.161	---
hotspot operation 10 mm distance	1.160	0.398	---
collocated situations	Σ SAR evaluation	1.574	
	SPLSR _i ≤ 0.040	0.038	

4.1 Maximum measured and reported SAR values for Head configuration

HEAD	SAR _{1g} results(W/kg)		SAR _{10g} results(W/kg)	
	Measured	Extrapolated	Measured	Extrapolated
GSM 850	0.917	1.053	0.712	0.819
GSM 1900	0.887	0.929	0.563	0.590
UMTS FDD II	0.853	0.957	0.539	0.605
UMTS FDD V	0.692	0.759	0.533	0.584
WLAN 2450	0.632	0.814	0.312	0.402

reported Combined SAR WWAN and WLAN 2.4GHz evaluation		
Frequency band	Position	Combined SAR <1.6W/kg
GSM 850	left cheek	1.160
GSM 1900	left cheek	0.929
UMTS FDD II	left cheek	0.957
WCDMA FDD V	left cheek	0.909

4.2 Maximum measured and reported SAR values for body worn configuration

body worn	SAR _{1g} results(W/kg)		SAR _{10g} results(W/kg)	
	Measured	Extrapolated	Measured	Extrapolated
GSM 850	0.835	0.959	0.636	0.730
GSM 1900	0.492	0.515	0.321	0.336
UMTS FDD II	0.458	0.514	0.298	0.334
UMTS FDD V	0.648	0.717	0.494	0.546
WLAN 2450	0.128	0.161	0.066	0.083

reported Combined SAR WWAN and WLAN 2.4GHz evaluation		
Frequency band	Position	Combined SAR <1.6W/kg
GSM 850	rear 15mm	0.997
GSM 1900	front 15mm	0.565
UMTS FDD II	front 15mm	0.566
WCDMA FDD V	rear 15mm	0.761

4.3 Maximum measured and reported SAR values for hotspot configuration

hotspot	SAR _{1g} results(W/kg)		SAR _{10g} results(W/kg)	
	Measured	Extrapolated	Measured	Extrapolated
GSM 850	1.010	1.160	0.774	0.889
GSM 1900	0.799	0.837	0.423	0.443
UMTS FDD II	0.699	0.784	0.458	0.514
UMTS FDD V	0.870	0.954	0.669	0.734
WLAN 2450	0.316	0.398	0.150	0.189

reported Combined SAR WWAN and WLAN 2.4GHz evaluation		
Frequency band	Position	Combined SAR <1.6W/kg
GSM 850	rear 10mm	1.250
GSM 1900	rear 10mm	0.870
UMTS FDD II	front 10mm	0.864
WCDMA FDD V	rear 10mm	1.030

4.4 SAR measurement variability and measurement uncertainty analysis

This analysis is required for worst case results larger than 0.8 W/kg.

frequency band	highest original measurement result at worst case position (W/kg)	repeated measurement result at worst case position (W/kg)	ratio <1.2
GSM 835 head	0.917	0.912	1.01
GSM 835 hotspot	1.010	0.996	1.01
GSM 1900	0.869	0.887	1.02
UMTS FDD II	0.853	0.790	1.08
UMTS FDD V	0.819	0.870	1.06

5 Test Environment

Ambient temperature: 20 – 24 °C
 Tissue Simulating liquid: 20 – 24 °C


Relative humidity content: 40 – 50 %
 Air pressure: not relevant for this kind of testing
 Power supply: 230 V / 50 Hz

Exact temperature values for each test are shown in the table(s) under 7.1 and/or on the measurement plots.

6 Test Set-up

6.1 Measurement system

6.1.1 System Description

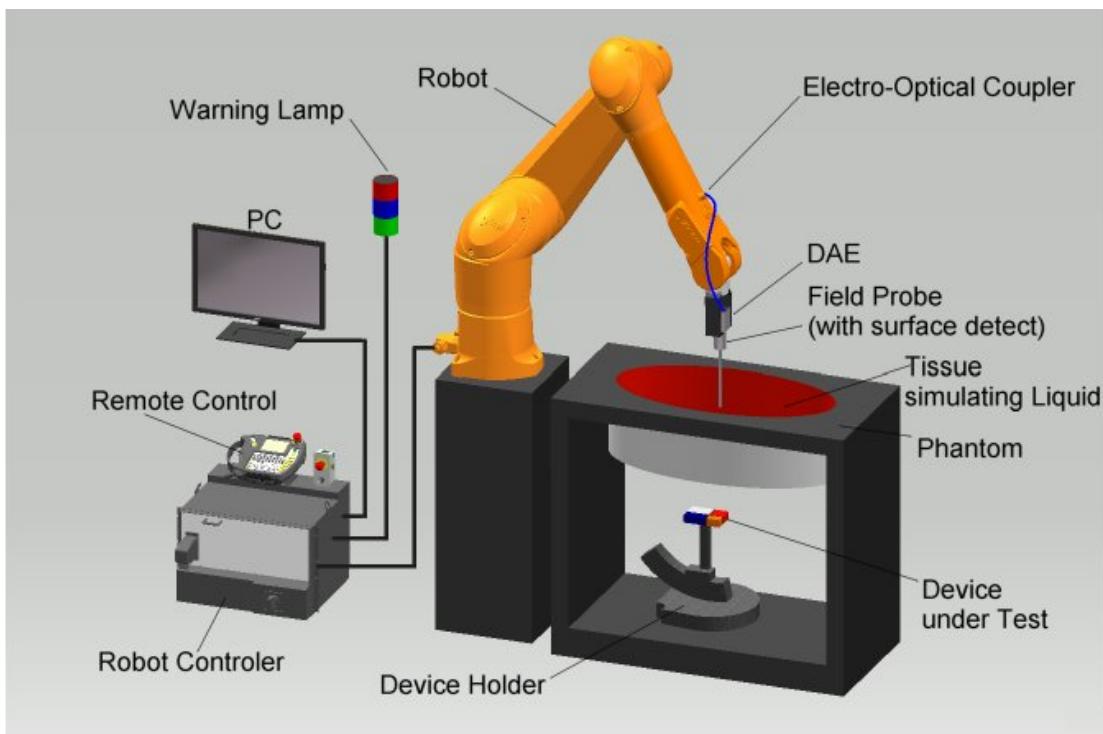

- The DASY system for performing compliance tests consists of the following items:
- A standard high precision 6-axis robot (Stäubli RX/TX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY measurement server.
- The DASY measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASY software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The triple flat and eli phantom for the testing of handheld and body-mounted wireless devices.
- The device holder for handheld mobile phones and mounting device adaptor for laptops
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

6.1.2 Test environment

The DASY measurement system is placed in a laboratory room within an environment which avoids influence on SAR measurements by ambient electromagnetic fields and any reflection from the environment. The pictures at the beginning of the photo documentation show a complete view of the test environment. The system allows the measurement of SAR values larger than 0.005 mW/g.

6.1.3 Probe description


Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

Technical data according to manufacturer information	
Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., butyl diglycol)
Calibration	Calibration certificate in Appendix D
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in HSL (rotation normal to probe axis)
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 20 mm Body diameter: 12 mm Tip diameter: 3.9 mm Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (ES3DV3)

6.1.4 Phantom description

The used SAM Phantom meets the requirements specified in FCC KDB865664 D01 for Specific Absorption Rate (SAR) measurements.

The phantom consists of a fibreglass shell integrated in a wooden table. It allows left-hand and right-hand head as well as body-worn measurements with a maximum liquid depth of 18 cm in head position and 22 cm in planar position (body measurements). The thickness of the Phantom shell is 2 mm +/- 0.1 mm.

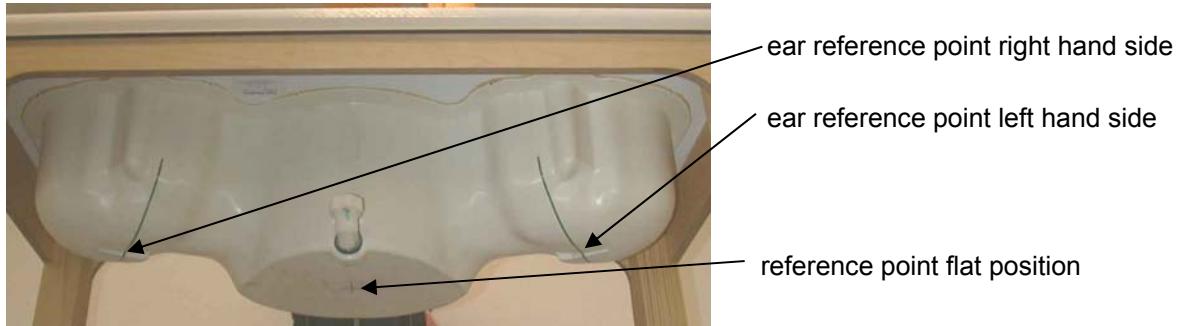

Triple Modular Phantom consists of three identical modules which can be installed and removed separately without emptying the liquid. It includes three reference points for phantom installation. Covers prevent evaporation of the liquid. Phantom material is resistant to DGBE based tissue simulating liquids.

6.1.5 Device holder description

The DASY device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.

6.1.6 Scanning procedure

- The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.
- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The highest integrated SAR value is the main concern in compliance test applications. These values can mostly be found at the inner surface of the phantom and cannot be measured directly due to the sensor offset in the probe. To extrapolate the surface values, the measurement distances to the surface must be known accurately. A distance error of 0.5mm could produce SAR errors of 6% at 1800 MHz. Using predefined locations for measurements is not accurate enough. Any shift of the phantom (e.g., slight deformations after filling it with liquid) would produce high uncertainties. For an automatic and accurate detection of the phantom surface, the DASY5 system uses the mechanical surface detection. The detection is always at touch, but the probe will move backward from the surface the indicated distance before starting the measurement.
- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The scan uses different grid spacings for different frequency measurements. Standard grid spacing for head measurements in frequency ranges $\leq 2\text{ GHz}$ is 15 mm in x- and y-dimension. For higher frequencies a finer resolution is needed, thus for the grid spacing is reduced according the following table:

Area scan grid spacing for different frequency ranges	
Frequency range	Grid spacing
$\leq 2\text{ GHz}$	$\leq 15\text{ mm}$
2 – 4 GHz	$\leq 12\text{ mm}$
4 – 6 GHz	$\leq 10\text{ mm}$

Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex B.

- A „zoom scan“ measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse“ scan. It uses a fine meshed grid where the robot moves the probe in steps along all the 3 axis (x,y and z-axis) starting at the bottom of the Phantom. The grid spacing for the cube measurement is varied according to the measured frequency range, the dimensions are given in the following table:

Zoom scan grid spacing and volume for different frequency ranges			
Frequency range	Grid spacing for x, y axis	Grid spacing for z axis	Minimum zoom scan volume
$\leq 2\text{ GHz}$	$\leq 8\text{ mm}$	$\leq 5\text{ mm}$	$\geq 30\text{ mm}$
2 – 3 GHz	$\leq 5\text{ mm}$	$\leq 5\text{ mm}$	$\geq 28\text{ mm}$
3 – 4 GHz	$\leq 5\text{ mm}$	$\leq 4\text{ mm}$	$\geq 28\text{ mm}$
4 – 5 GHz	$\leq 4\text{ mm}$	$\leq 3\text{ mm}$	$\geq 25\text{ mm}$
5 – 6 GHz	$\leq 4\text{ mm}$	$\leq 2\text{ mm}$	$\geq 22\text{ mm}$

DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex B. Test results relevant for the specified standard (see section 3) are shown in table form in section 7.

6.1.7 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of all points in the three directions x, y and z. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 1 to 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

6.1.8 Data Storage and Evaluation

Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4", ".DA5x". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with V_i = compensated signal of channel i $(i = x, y, z)$
 U_i = input signal of channel i $(i = x, y, z)$
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with V_i = compensated signal of channel i $(i = x, y, z)$
 $Norm_i$ = sensor sensitivity of channel i $(i = x, y, z)$
 $[mV/(V/m)^2]$ for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

6.1.9 Tissue simulating liquids: dielectric properties

The following materials are used for producing the tissue-equivalent materials.

(Liquids used for tests described in section 7. are marked with) :

Ingredients (% of weight)	Frequency (MHz)								
	<input type="checkbox"/> 450	<input type="checkbox"/> 750	<input checked="" type="checkbox"/> 835	<input type="checkbox"/> 900	<input type="checkbox"/> 1450	<input type="checkbox"/> 1750	<input checked="" type="checkbox"/> 1900	<input checked="" type="checkbox"/> 2450	<input type="checkbox"/> 5000
frequency band									
Water	38.56	41.1	41.45	40.92	54.37	55.35	55.19	54.7	64 - 78
Salt (NaCl)	3.95	1.4	1.45	1.48	0.63	0.38	0.19	0.0	2 - 3
Sugar	56.32	57.0	56.0	56.5	0.0	0.0	0.0	0.0	0.0
HEC	0.98	0.2	1.0	1.0	0.0	0.0	0.0	0.0	0.0
Bactericide	0.19	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.0
Tween 20	0.0	0.0	0.0	0.0	44.90	44.17	44.52	45.2	0.0
Emulsifiers	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	9 - 15
Mineral Oil	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	11 - 18

Table 3: Head tissue dielectric properties

Ingredients (% of weight)	Frequency (MHz)								
	<input type="checkbox"/> 450	<input type="checkbox"/> 750	<input checked="" type="checkbox"/> 835	<input type="checkbox"/> 900	<input type="checkbox"/> 1450	<input type="checkbox"/> 1750	<input checked="" type="checkbox"/> 1900	<input checked="" type="checkbox"/> 2450	<input type="checkbox"/> 5000
frequency band									
Water	51.16	51.7	52.4	56.0	71.40	71.45	71.56	71.65	64 - 78
Salt (NaCl)	1.49	0.9	1.40	0.76	0.55	0.5	0.39	0.3	2 - 3
Sugar	46.78	47.2	45.0	41.76	0.0	0.0	0.0	0.0	0.0
HEC	0.52	0.0	1.0	1.21	0.0	0.0	0.0	0.0	0.0
Bactericide	0.05	0.1	0.1	0.27	0.1	0.1	0.1	0.1	0.0
Tween 20	0.0	0.0	0.0	0.0	27.95	27.95	27.95	27.95	0.0
Emulsifiers	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	9 - 15
Mineral Oil	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	11 - 18

Table 4: Body tissue dielectric properties

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Tween 20: Polyoxyethylene (20) sorbitan monolaurate

Water: De-ionized, 16MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

6.1.10 Tissue simulating liquids: parameters

Liquid HSL	Freq. (MHz)	Target head tissue		Measurement head tissue				Measurement date
		Permittivity	Conductivity (S/m)	Permittivity	Dev. %	Conductivity	Dev. %	
835/900	824	41.56	0.90	41.8	0.5%	19.60	0.90	-0.1%
	825	41.55	0.90	41.7	0.4%	19.60	0.90	0.0%
	835	41.50	0.90	41.6	0.2%	19.61	0.91	1.2%
	837	41.50	0.90	41.6	0.2%	19.57	0.91	1.0%
	847	41.50	0.91	41.4	-0.2%	19.57	0.92	1.0%
	849	41.50	0.92	41.4	-0.2%	19.57	0.92	1.0%
1900	1850	40.00	1.40	40.8	1.9%	13.07	1.34	-3.9%
	1852	40.00	1.40	40.8	2.0%	13.08	1.35	-3.8%
	1880	40.00	1.40	40.7	1.8%	13.15	1.38	-1.8%
	1900	40.00	1.40	40.6	1.4%	13.21	1.40	-0.3%
	1908	40.00	1.40	40.5	1.3%	13.18	1.40	-0.1%
	1910	40.00	1.40	40.6	1.4%	13.15	1.40	-0.2%
2450	2412	39.27	1.77	38.8	-1.1%	13.11	1.76	-0.4%
	2437	39.22	1.79	38.7	-1.3%	13.20	1.79	0.1%
	2442	39.21	1.79	38.7	-1.3%	13.22	1.80	0.2%
	2450	39.20	1.80	38.7	-1.4%	13.23	1.80	0.2%
	2462	39.18	1.81	38.6	-1.4%	13.23	1.81	-0.1%

Table 5: Parameter of the head tissue simulating liquid

Liquid MSL	Freq. (MHz)	Target body tissue		Measurement body tissue				Measurement date
		Permittivity	Conductivity (S/m)	Permittivity	Dev. %	Conductivity	Dev. %	
835/900	824	55.24	0.97	54.6	-1.2%	21.47	0.98	1.5%
	825	55.24	0.97	54.6	-1.2%	21.48	0.99	1.7%
	835	55.20	0.97	54.5	-1.3%	21.47	1.00	2.8%
	837	55.19	0.97	54.4	-1.4%	21.47	1.00	2.8%
	847	55.16	0.98	54.3	-1.5%	21.42	1.01	2.5%
	849	55.16	0.99	54.3	-1.6%	21.40	1.01	2.4%
1900	1850	53.30	1.52	53.5	0.4%	14.15	1.46	-4.2%
	1852	53.30	1.52	53.5	0.4%	14.14	1.46	-4.2%
	1880	53.30	1.52	53.4	0.2%	14.16	1.48	-2.6%
	1900	53.30	1.52	53.4	0.2%	14.25	1.51	-0.9%
	1908	53.30	1.52	53.4	0.1%	14.25	1.51	-0.5%
	1910	53.30	1.52	53.4	0.1%	14.24	1.51	-0.5%
1900	1850	53.30	1.52	53.5	0.4%	14.15	1.46	-4.2%
	1852	53.30	1.52	53.5	0.4%	14.14	1.46	-4.2%
	1880	53.30	1.52	53.4	0.2%	14.16	1.48	-2.6%
	1900	53.30	1.52	53.4	0.2%	14.25	1.51	-0.9%
	1908	53.30	1.52	53.4	0.1%	14.25	1.51	-0.5%
	1910	53.30	1.52	53.4	0.1%	14.24	1.51	-0.5%
2450	2412	52.75	1.91	51.3	-2.7%	14.35	1.93	0.6%
	2437	52.72	1.94	51.2	-2.8%	14.42	1.95	0.9%
	2450	52.70	1.95	51.2	-2.8%	14.44	1.97	0.9%
	2462	52.68	1.97	51.2	-2.9%	14.47	1.98	0.7%

Table 6: Parameter of the body tissue simulating liquid

Note: The dielectric properties have been measured using the contact probe method at 22°C.

6.1.11 Measurement uncertainty evaluation for SAR test

DASY5 Uncertainty Budget								
Source of uncertainty	Uncertainty Value ± %	Probability Distribution	Divisor	C _i		Standard Uncertainty		V _i ² or V _{eff}
				(1g)	(10g)	± %, (1g)	± %, (10g)	
Measurement System								
Probe calibration	± 6.0 %	Normal	1	1	1	± 6.0 %	± 6.0 %	∞
Axial isotropy	± 4.7 %	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical isotropy	± 9.6 %	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %	∞
Boundary effects	± 1.0 %	Rectangular	√3	1	1	± 0.6 %	± 0.6 %	∞
Probe linearity	± 4.7 %	Rectangular	√3	1	1	± 2.7 %	± 2.7 %	∞
System detection limits	± 1.0 %	Rectangular	√3	1	1	± 0.6 %	± 0.6 %	∞
Readout electronics	± 0.3 %	Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response time	± 0.8 %	Rectangular	√3	1	1	± 0.5 %	± 0.5 %	∞
Integration time	± 2.6 %	Rectangular	√3	1	1	± 1.5 %	± 1.5 %	∞
RF ambient noise	± 3.0 %	Rectangular	√3	1	1	± 1.7 %	± 1.7 %	∞
RF ambient reflections	± 3.0 %	Rectangular	√3	1	1	± 1.7 %	± 1.7 %	∞
Probe positioner	± 0.4 %	Rectangular	√3	1	1	± 0.2 %	± 0.2 %	∞
Probe positioning	± 2.9 %	Rectangular	√3	1	1	± 1.7 %	± 1.7 %	∞
Max.SAR evaluation	± 1.0 %	Rectangular	√3	1	1	± 0.6 %	± 0.6 %	∞
Test Sample Related								
Device positioning	± 2.9 %	Normal	1	1	1	± 2.9 %	± 2.9 %	145
Device holder uncertainty	± 3.6 %	Normal	1	1	1	± 3.6 %	± 3.6 %	5
Power drift	± 5.0 %	Rectangular	√3	1	1	± 2.9 %	± 2.9 %	∞
Phantom and Set-up								
Phantom uncertainty	± 4.0 %	Rectangular	√3	1	1	± 2.3 %	± 2.3 %	∞
Liquid conductivity (target)	± 5.0 %	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %	∞
Liquid conductivity (meas.)	± 5.0 %	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %	∞
Liquid permittivity (target)	± 5.0 %	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %	∞
Liquid permittivity (meas.)	± 5.0 %	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %	∞
Combined Std.						± 11.1 %	± 10.8 %	387
Expanded Std.						± 22.1 %	± 21.6 %	

Table 7: Measurement uncertainties

Worst-Case uncertainty budget for DASY5 assessed according to IEEE 1528/2003.

The budget is valid for 2G and 3G communication signals and frequency range 300MHz - 3 GHz.

For these conditions it represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerably smaller.

Relative DASY5 Uncertainty Budget for SAR Tests								
According to IEEE 1528/2013 and IEC62209/2011 for the 0.3 - 3GHz range								
Error Description	Uncertainty Value ± %	Probability Distribution	Divisor	c_i	c_i	Standard Uncertainty		v_i^2 or v_{eff}
				(1g)	(10g)	± %, (1g)	± %, (10g)	
Measurement System								
Probe calibration	± 6.0 %	Normal	1	1	1	± 6.0 %	± 6.0 %	∞
Axial isotropy	± 4.7 %	Rectangular	$\sqrt{3}$	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical isotropy	± 9.6 %	Rectangular	$\sqrt{3}$	0.7	0.7	± 3.9 %	± 3.9 %	∞
Boundary effects	± 1.0 %	Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %	∞
Probe linearity	± 4.7 %	Rectangular	$\sqrt{3}$	1	1	± 2.7 %	± 2.7 %	∞
System detection limits	± 1.0 %	Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %	∞
Modulation Response	± 2.4 %	Rectangular	$\sqrt{3}$	1	1	± 1.4 %	± 1.4 %	∞
Readout electronics	± 0.3 %	Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response time	± 0.8 %	Rectangular	$\sqrt{3}$	1	1	± 0.5 %	± 0.5 %	∞
Integration time	± 2.6 %	Rectangular	$\sqrt{3}$	1	1	± 1.5 %	± 1.5 %	∞
RF ambient noise	± 3.0 %	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %	∞
RF ambient reflections	± 3.0 %	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %	∞
Probe positioner	± 0.4 %	Rectangular	$\sqrt{3}$	1	1	± 0.2 %	± 0.2 %	∞
Probe positioning	± 2.9 %	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %	∞
Max. SAR evaluation	± 2.0 %	Rectangular	$\sqrt{3}$	1	1	± 1.2 %	± 1.2 %	∞
Test Sample Related								
Device positioning	± 2.9 %	Normal	1	1	1	± 2.9 %	± 2.9 %	145
Device holder uncertainty	± 3.6 %	Normal	1	1	1	± 3.6 %	± 3.6 %	5
Power drift	± 5.0 %	Rectangular	$\sqrt{3}$	1	1	± 2.9 %	± 2.9 %	∞
Phantom and Set-up								
Phantom uncertainty	± 6.1 %	Rectangular	$\sqrt{3}$	1	1	± 3.5 %	± 3.5 %	∞
SAR correction	± 1.9 %	Rectangular	$\sqrt{3}$	1	0.84	± 1.1 %	± 0.9 %	∞
Liquid conductivity (meas.)	± 5.0 %	Rectangular	$\sqrt{3}$	0.78	0.71	± 2.3 %	± 2.0 %	∞
Liquid permittivity (meas.)	± 5.0 %	Rectangular	$\sqrt{3}$	0.26	0.26	± 0.8 %	± 0.8 %	∞
Temp. Unc. - Conductivity	± 3.4 %	Rectangular	$\sqrt{3}$	0.78	0.71	± 1.5 %	± 1.4 %	∞
Temp. Unc. - Permittivity	± 0.4 %	Rectangular	$\sqrt{3}$	0.23	0.26	± 0.1 %	± 0.1 %	∞
Combined Uncertainty								± 11.3 %
Expanded Std. Uncertainty								± 22.7 %
								± 22.5 %

Table 8: Measurement uncertainties

Worst-Case uncertainty budget for DASY5 assessed according to IEEE 1528/2013 and IEC 62209-1/2011 standards. The budget is valid for the frequency range 300MHz - 3 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerably smaller.

DASY5 Uncertainty Budget								
According to IEC 62209-2/2010 for the 30 MHz - 6 GHz range								
Source of uncertainty	Uncertainty Value ± %	Probability Distribution	Divisor	c_i	c_i	Standard Uncertainty		v_i^2 or v_{eff}
				(1g)	(10g)	± %, (1g)	± %, (10g)	
Measurement System								
Probe calibration	± 6.6 %	Normal	1	1	1	± 6.6 %	± 6.6 %	∞
Axial isotropy	± 4.7 %	Rectangular	$\sqrt{3}$	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical isotropy	± 9.6 %	Rectangular	$\sqrt{3}$	0.7	0.7	± 3.9 %	± 3.9 %	∞
Boundary effects	± 2.0 %	Rectangular	$\sqrt{3}$	1	1	± 1.2 %	± 1.2 %	∞
Probe linearity	± 4.7 %	Rectangular	$\sqrt{3}$	1	1	± 2.7 %	± 2.7 %	∞
System detection limits	± 1.0 %	Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %	∞
Modulation Response	± 2.4 %	Rectangular	$\sqrt{3}$	1	1	± 1.4 %	± 1.4 %	∞
Readout electronics	± 0.3 %	Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response time	± 0.8 %	Rectangular	$\sqrt{3}$	1	1	± 0.5 %	± 0.5 %	∞
Integration time	± 2.6 %	Rectangular	$\sqrt{3}$	1	1	± 1.5 %	± 1.5 %	∞
RF ambient noise	± 3.0 %	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %	∞
RF ambient reflections	± 3.0 %	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %	∞
Probe positioner	± 0.8 %	Rectangular	$\sqrt{3}$	1	1	± 0.5 %	± 0.5 %	∞
Probe positioning	± 6.7 %	Rectangular	$\sqrt{3}$	1	1	± 3.9 %	± 3.9 %	∞
Post-processing	± 4.0 %	Rectangular	$\sqrt{3}$	1	1	± 2.3 %	± 2.3 %	∞
Test Sample Related								
Device positioning	± 2.9 %	Normal	1	1	1	± 2.9 %	± 2.9 %	145
Device holder uncertainty	± 3.6 %	Normal	1	1	1	± 3.6 %	± 3.6 %	5
Power drift	± 5.0 %	Rectangular	$\sqrt{3}$	1	1	± 2.9 %	± 2.9 %	∞
Phantom and Set-up								
Phantom uncertainty	± 7.9 %	Rectangular	$\sqrt{3}$	1	1	± 4.6 %	± 4.6 %	∞
SAR correction	± 1.9 %	Rectangular	$\sqrt{3}$	1	0.84	± 1.1 %	± 0.9 %	∞
Liquid conductivity (meas.)	± 5.0 %	Rectangular	$\sqrt{3}$	0.78	0.71	± 2.3 %	± 2.0 %	∞
Liquid permittivity (meas.)	± 5.0 %	Rectangular	$\sqrt{3}$	0.26	0.26	± 0.8 %	± 0.8 %	∞
Temp. Unc. - Conductivity	± 3.4 %	Rectangular	$\sqrt{3}$	0.78	0.71	± 1.5 %	± 1.4 %	∞
Temp. Unc. - Permittivity	± 0.4 %	Rectangular	$\sqrt{3}$	0.23	0.26	± 0.1 %	± 0.1 %	∞
Combined Uncertainty								
Expanded Std. Uncertainty						± 12.7 %	± 12.6 %	330
						± 25.4 %	± 25.3 %	

Table 9: Measurement uncertainties.

Worst-Case uncertainty budget for DASY5 assessed according to IEC 62209-2/2010 standard. The budget is valid for the frequency range 30MHz - 6 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerably smaller.

6.1.12 Measurement uncertainty evaluation for System Check

Uncertainty of a System Performance Check with DASY5 System for the 0.3 - 3 GHz range								
Source of uncertainty	Uncertainty Value	Probability Distribution	Divisor	c _i	c _i	Standard Uncertainty		v _i ² or v _{eff}
				(1g)	(10g)	± %, (1g)	± %, (10g)	
Measurement System								
Probe calibration	± 6.0 %	Normal	1	1	1	± 6.0 %	± 6.0 %	∞
Axial isotropy	± 4.7 %	Rectangular	√ 3	0.7	0.7	± 1.9 %	± 1.9 %	∞
Hemispherical isotropy	± 0.0 %	Rectangular	√ 3	0.7	0.7	± 0.0 %	± 0.0 %	∞
Boundary effects	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Probe linearity	± 4.7 %	Rectangular	√ 3	1	1	± 2.7 %	± 2.7 %	∞
System detection limits	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Readout electronics	± 0.3 %	Normal	1	1	1	± 0.3 %	± 0.3 %	∞
Response time	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
Integration time	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
RF ambient conditions	± 3.0 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
Probe positioner	± 0.4 %	Rectangular	√ 3	1	1	± 0.2 %	± 0.2 %	∞
Probe positioning	± 2.9 %	Rectangular	√ 3	1	1	± 1.7 %	± 1.7 %	∞
Max. SAR evaluation	± 1.0 %	Rectangular	√ 3	1	1	± 0.6 %	± 0.6 %	∞
Test Sample Related								
Dev. of experimental dipole	± 0.0 %	Rectangular	√ 3	1	1	± 0.0 %	± 0.0 %	∞
Source to liquid distance	± 2.0 %	Rectangular	√ 3	1	1	± 1.2 %	± 1.2 %	∞
Power drift	± 3.4 %	Rectangular	√ 3	1	1	± 2.0 %	± 2.0 %	∞
Phantom and Set-up								
Phantom uncertainty	± 4.0 %	Rectangular	√ 3	1	1	± 2.3 %	± 2.3 %	∞
SAR correction	± 1.9 %	Rectangular	√ 3	1	0.84	± 1.1 %	± 0.9 %	∞
Liquid conductivity (meas.)	± 5.0 %	Normal	1	0.78	0.71	± 3.9 %	± 3.6 %	∞
Liquid permittivity (meas.)	± 5.0 %	Normal	1	0.26	0.26	± 1.3 %	± 1.3 %	∞
Temp. unc. - Conductivity	± 1.7 %	Rectangular	√ 3	0.78	0.71	± 0.8 %	± 0.7 %	∞
Temp. unc. - Permittivity	± 0.3 %	Rectangular	√ 3	0.23	0.26	± 0.0 %	± 0.0 %	∞
Combined Uncertainty						± 9.1 %	± 8.9 %	330
Expanded Std. Uncertainty						± 18.2 %	± 17.9 %	

Table 10: Measurement uncertainties of the System Check with DASY5 (0.3-3GHz)

Note: Worst case probe calibration uncertainty has been applied for all probes used during the measurements.

6.1.13 System check


The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE 1528. The following table shows system check results for all frequency bands and tissue liquids used during the tests (plot(s) see annex A).

System performance check (1000 mW)									
System validation Kit	Probe	Frequency	Target SAR _{1g} /mW/g (+/- 10%)	Target SAR _{10g} /mW/g (+/- 10%)	Measured SAR _{1g} /mW/g	SAR _{1g} dev.	Measured SAR _{10g} /mW/g	SAR _{10g} dev.	Measured date
D835V2 S/N: 4d153	ES3DV3 SN: 3320	835 MHz head	9.58	6.21	9.69	1.1%	6.41	3.2%	2014-12-10
D835V2 S/N: 4d153	ES3DV3 SN: 3320	835 MHz body	9.40	6.12	9.83	4.6%	6.53	6.7%	2014-12-18
D1900V2 S/N: 5d009	ES3DV3 SN: 3320	1900 MHz head	40.10	21.00	39.20	-2.2%	20.50	-2.4%	2014-12-15
D1900V2 S/N: 5d009	ES3DV3 SN: 3320	1900 MHz body	40.90	21.70	38.50	-5.9%	20.60	-5.1%	2014-12-18
D1900V2 S/N: 5d009	ES3DV3 SN: 3320	1900 MHz body	40.90	21.70	38.70	-5.4%	20.50	-5.5%	2014-12-19
D2450V2 S/N: 710	ES3DV3 SN: 3320	2450 MHz head	52.10	24.00	55.80	7.1%	25.80	7.5%	2014-12-22
D2450V2 S/N: 710	ES3DV3 SN: 3320	2450 MHz body	51.00	23.80	49.50	-2.9%	22.90	-3.8%	2014-12-23

Table 11: Results system check

6.1.14 System check procedure

The system check is performed by using a validation dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 1000 mW for frequencies below 2 GHz or 100 mW for frequencies above 2 GHz. To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot). System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

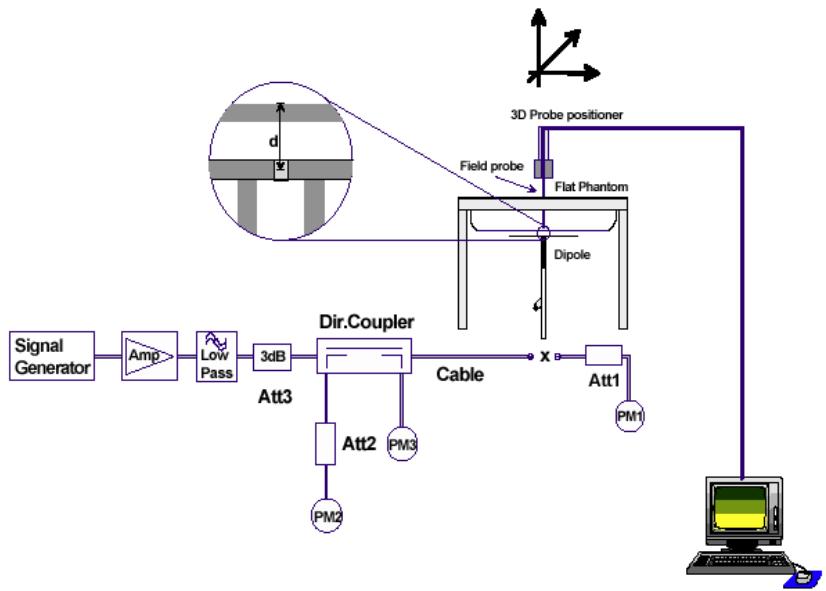

6.1.15 System validation

The system validation is performed in a similar way as a system check. It needs to be performed once a SAR measurement system has been established and allows an evaluation of the system accuracy with all components used together with the specified system. It has to be repeated at least once a year or when new system components are used (DAE, probe, phantom, dipole, liquid type).

In addition to the procedure used during system check a system validation also includes checks of probe isotropy, probe modulation factor and RF signal.

The following table lists the system validations relevant for this test report:

Frequency (MHz)	Test System	DASY SW	Dipole Type /SN	Probe Type / SN	Calibrated signal type(s)	DAE unit Type / SN	head validation	body validation
835	Saarbrücken / SAR-2	V52.8.7	D835V2 / 4d153	ES3DV3 / 3320	CW	DAE3/ 477	2014-07-02	2014-07-02
1900	Saarbrücken / SAR-2	V52.8.7	D1900V2 / 5d009	ES3DV3 / 3320	CW	DAE3/ 477	2014-07-14	2014-07-10
2450	Saarbrücken / SAR-2	V52.8.7	D2450V2 / 710	ES3DV3 / 3320	CW	DAE3/ 477	2014-07-17	2014-07-17

7 Detailed Test Results

7.1 Conducted power measurements

For the measurements the Rohde & Schwarz Radio Communication Tester CMU 200 and CMW500 were used.

The output power was measured using an integrated RF connector and attached RF cable.

The conducted output power was also checked before and after each SAR measurement. The resulting power values were within a 0.2 dB tolerance of the values shown below.

Note: CMU200 measures GSM peak and average output power for active timeslots.

For SAR the time based average power is relevant. The difference in-between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1 : 8	1: 4	1 : 2.66	1 : 2
time based avg. power compared to slotted avg. power	- 9 dB	- 6 dB	- 4.25 dB	- 3 dB

The signalling modes differ as follows :

mode	coding scheme	modulation
GRPS	CS1 to CS4	GMSK
EGPRS (EDGE)	MCS1 to MCS4	GMSK
EGPRS (EDGE)	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

7.1.1 Conducted power measurements GSM 850 MHz

Channel / frequency	modulation	timeslots	slotted avg. power	time based avg. Power (calculated)
128 / 824.2 MHz	GMSK	1	32.6 dBm	23.6 dBm
190 / 836.6 MHz	GMSK	1	32.5 dBm	23.5 dBm
251 / 848.8 MHz	GMSK	1	32.6 dBm	23.6 dBm
128 / 824.2 MHz	GMSK	2	31.0 dBm	25.0 dBm
190 / 836.6 MHz	GMSK	2	30.8 dBm	24.8 dBm
251 / 848.8 MHz	GMSK	2	30.8 dBm	24.8 dBm
128 / 824.2 MHz	GMSK	3	29.0 dBm	24.7 dBm
190 / 836.6 MHz	GMSK	3	28.8 dBm	24.5 dBm
251 / 848.8 MHz	GMSK	3	28.8 dBm	24.5 dBm
128 / 824.2 MHz	GMSK	4	27.6 dBm	24.6 dBm
190 / 836.6 MHz	GMSK	4	27.5 dBm	24.5 dBm
251 / 848.8 MHz	GMSK	4	27.5 dBm	24.5 dBm
128 / 824.2 MHz	8PSK	1	27.3 dBm	18.3 dBm
190 / 836.6 MHz	8PSK	1	27.1 dBm	18.1 dBm
251 / 848.8 MHz	8PSK	1	27.2 dBm	18.2 dBm
128 / 824.2 MHz	8PSK	2	27.2 dBm	21.2 dBm
190 / 836.6 MHz	8PSK	2	27.1 dBm	21.1 dBm
251 / 848.8 MHz	8PSK	2	27.1 dBm	21.1 dBm
128 / 824.2 MHz	8PSK	3	26.3 dBm	22.0 dBm
190 / 836.6 MHz	8PSK	3	26.2 dBm	21.9 dBm
251 / 848.8 MHz	8PSK	3	26.2 dBm	21.9 dBm
128 / 824.2 MHz	8PSK	4	25.0 dBm	22.0 dBm
190 / 836.6 MHz	8PSK	4	24.9 dBm	21.9 dBm
251 / 848.8 MHz	8PSK	4	24.9 dBm	21.9 dBm

Table 12: Test results conducted power measurement GSM 850 MHz

7.1.2 Conducted power measurements GSM 1900 MHz

Channel / frequency	modulation	timeslots	slotted avg. power	time based avg. Power (calculated)
512 / 1850.2 MHz	GMSK	1	29.8 dBm	20.8 dBm
661 / 1880.0 MHz	GMSK	1	29.7 dBm	20.7 dBm
810 / 1909.8 MHz	GMSK	1	29.8 dBm	20.8 dBm
512 / 1850.2 MHz	GMSK	2	29.0 dBm	23.0 dBm
661 / 1880.0 MHz	GMSK	2	29.2 dBm	23.2 dBm
810 / 1909.8 MHz	GMSK	2	29.2 dBm	23.2 dBm
512 / 1850.2 MHz	GMSK	3	27.1 dBm	22.8 dBm
661 / 1880.0 MHz	GMSK	3	27.2 dBm	22.9 dBm
810 / 1909.8 MHz	GMSK	3	27.3 dBm	23.0 dBm
512 / 1850.2 MHz	GMSK	4	25.9 dBm	22.9 dBm
661 / 1880.0 MHz	GMSK	4	25.9 dBm	22.9 dBm
810 / 1909.8 MHz	GMSK	4	26.0 dBm	23.0 dBm
512 / 1850.2 MHz	8PSK	1	26.2 dBm	17.2 dBm
661 / 1880.0 MHz	8PSK	1	26.0 dBm	17.0 dBm
810 / 1909.8 MHz	8PSK	1	26.0 dBm	17.0 dBm
512 / 1850.2 MHz	8PSK	2	26.1 dBm	20.1 dBm
661 / 1880.0 MHz	8PSK	2	25.9 dBm	19.9 dBm
810 / 1909.8 MHz	8PSK	2	25.9 dBm	19.9 dBm
512 / 1850.2 MHz	8PSK	3	25.9 dBm	21.6 dBm
661 / 1880.0 MHz	8PSK	3	25.8 dBm	21.5 dBm
810 / 1909.8 MHz	8PSK	3	25.9 dBm	21.6 dBm
512 / 1850.2 MHz	8PSK	4	24.8 dBm	21.8 dBm
661 / 1880.0 MHz	8PSK	4	24.8 dBm	21.8 dBm
810 / 1909.8 MHz	8PSK	4	24.8 dBm	21.8 dBm

Table 13: Test results conducted power measurement GSM 1900 MHz

7.1.3 Justification of SAR measurements in GSM mode

SAR measurements were performed in the configuration with highest calculated time based averaged output power.

For comparison an additional delta measurement was performed with in EDGE mode.

7.1.4 Conducted power measurements WCDMA FDD V (850 MHz)

mode	Max. RMS output power 850 MHz (FDD V) / dBm		
	4132 / 826.4 MHz	4182 / 836.6 MHz	4233 / 846.6 MHz
RMC 12.2 kbit/s	23.4	23.4	23.5
DC-HSDPA Sub test 1	21.7	21.9	22.1
DC-HSDPA Sub test 2	21.4	21.4	21.4
DC-HSDPA Sub test 3	21.0	20.9	21.6
DC-HSDPA Sub test 4	21.9	21.9	22.1
HSUPA Sub test 1	22.4	22.4	22.4
HSUPA Sub test 2	22.5	22.3	22.4
HSUPA Sub test 3	22.5	22.4	22.4
HSUPA Sub test 4	22.0	21.9	22.0
HSUPA Sub test 5	22.0	21.9	22.0

Table 14: Test results conducted power measurement UMTS FDD V 850MHz

7.1.5 Conducted power measurements WCDMA FDD II (1900 MHz)

mode	Max. RMS output power 1900 MHz (FDD II) / dBm		
	9262 / 1852.4 MHz	9400 / 1880.0 MHz	9538 / 1907.6 MHz
RMC 12.2 kbit/s	23.1	22.9	22.9
DC-HSDPA Sub test 1	21.2	21.8	21.2
DC-HSDPA Sub test 2	20.7	20.4	20.7
DC-HSDPA Sub test 3	20.8	20.9	20.8
DC-HSDPA Sub test 4	21.5	21.4	21.4
HSUPA Sub test 1	22.0	21.9	21.9
HSUPA Sub test 2	22.1	21.8	22.0
HSUPA Sub test 3	22.1	21.9	22.1
HSUPA Sub test 4	21.5	21.3	21.6
HSUPA Sub test 5	21.6	21.3	21.6

Table 15: Test results conducted power measurement UMTS FDD II 1900MHz

Remark: None of the HSDPA/HSUPA settings leads to conducted power values exceeding the conducted power in RMC mode by more than 0.25 dB.

Therefore no additional SAR measurements were performed in HSDPA/HSUPA mode.

7.1.6 Test-set-up information for WCDMA / HSPDA / HSUPA

a) WCDMA RMC

In RMC (reference measurement channel) mode the conducted power at 4 different bit rates was measured. They correspond with the used spreading factors as follows:

Bit rate	12.2 kbit/s	64 kbit/s	144 kbit/s	384 kbit/s
Spreading factor (SF)	64	16	8	4

In RMC mode only DPCCH and DPDCH are active. As bit rate changes do not influence the relative power of any code channel the measured RMS output power remains on the same level which is set to maximum by TPC (Transmit power control) pattern type 'All 1'.

b) DC-HSDPA (3GPP Release 8)

Dual Cell – HSDPA has been signalized using the following settings for connection setup:

Parameter During Connection Setup	Value
P-CPICH_Ec/Ior	-10 dB
P-CCPCH	-12
SCH_Ec/Ior	-12
PICH_Ec/Ior	-15
HS-PDSCH	off
HS-SCCH_1	off
DPCH_Ec/Ior	-5
OCNS_Ec/Ior	-3.1

Table 16: Downlink Physical Channels according to 3GPP 34.121 Table E.5.0

The fixed reference channel has been set to H-set 12 according to 3GPP TS 34.121 Table C.8.1.12:

Parameter	Unit	Value
Nominal Average Inf. Bit Rate	kbit/s	60
Inter-TTI Distance	TTI's	1
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Process	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codecs	Codecs	1
Modulation		QPSK

Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.

Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.

Table 17: H-Set 12 QPSK configuration

The same Sub-test settings as for Release 5 HSDPA were used for the tests.

c) HSUPA

In HSUPA mode additional code channels (E-DPCCH, E-DPDCHn) are added for data transfer in uplink at higher bit rates.

5 sub-tests are defined by 3GPP 34.121 according to the following table :

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ec} (SF)	β_{ed} (code)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}, 47/15$ $\beta_{ed2}, 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI} = 8 \iff A_{hs} = \beta_{hs}/\beta_c = 30/15 \iff \beta_{hs} = 30/15 * \beta_c$
 Note 2 : CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference
 Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$
 Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1,TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$
 Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g
 Note 6 : β_{ed} can not be set directly; it is set by Absolute Grant Value

Table 18: Subtests for UMTS Release 6 HSUPA

To achieve the settings above some additional procedures were defined by 3GPP 34.121. Those have been included in an application note for the CMU200 and were exactly followed :

- Test mode connection (BS signal tab) :
RMC 12.2 kbit/s + HSPA 34.108 with loop mode 1
- HS-DSCH settings (BS signal tab):
- FRC with H-set 1 QPSK
- ACK-NACK repetition factor = 3
- CQI feedback cycle = 4ms
- CQI repetition factor = 2
- HSUPA-specific signalling settings (UE signal tab) :
- E-TFCI table index = 0
- E-DCH minimum set E-TFCI = 9
- Puncturing limit non-max = 0.84
- max. number of channelisation codes = 2x SF4
- Initial Serving Grant Value = Off
- HSDPA and HSUPA Gain factors (UE signal tab)

Sub-test	β_c	β_d	$\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI}$	$\Delta E-DPCCH$)*
1	10	15	8	6
2	6	15	8	8
3	15	9	8	8
4	2	15	8	5
5	14	15	8	7

)* : β_{ec} and β_{ed} ratios (relative to β_c and β_d) are set by $\Delta E-DPCCH$

- HSUPA Reference E-TFCIs (UE signal tab > HSUPA gain factors) :

Sub-test	1, 2, 4, 5				
Number of E-TFCIs	5				
Reference E-TFCI	11	67	71	75	81
Reference E-TFCI power offset	4	18	23	26	27

Sub-test	3	
Number of E-TFCIs	2	
Reference E-TFCI	11	92
Reference E-TFCI power offset	4	18

- HSUPA-specific generator parameters (BS Signal tab > HSUPA > E-AGCH > AG Pattern)

Sub-test	Absolute Grant Value (AG Index)
1	20
2	12
3	15
4	17
5	21

- Power Level settings (BS Signal tab > Node B-settings):

- Level reference : Output Channel Power (l0r)

- Output Channel Power (l0r) : -86 dBm

- Downlink Physical Channel Settings (BS signal tab)

- P-CPICH : -10 dB

- S-CPICH : Off

- P-SCH : -15 dB

- S-SCH : -15 dB

- P-CCPCH : -12 dB

- S-CCPCH : -12 dB

- PICH : -15 dB

- AICH : -12 dB

- DPDCH : -10 dB

- HS-SCCH : -8 dB

- HS-PDSCH : -3 dB

- E-AGCH : -20 dB

- E-RGCH/E-HICH -20 dB

- E-RGCH Active : Off

The settings above were stored once for each sub-test and recalled before the measurement.

HSUPA test procedure :

To reach maximum output power in HSUPA mode the following procedures were followed:

3 different TPC patterns were defined :

Set 1 : Closed loop with target power 10 dBm

Set 2 : Single Pattern+Alternating with binary pattern '11111' for 1 dB steps 'up'

Set 3 : Single Pattern+Alternating with binary pattern '00000' for 1 dB steps 'down'

After recalling a certain HSUPA sub-test the HSUPA E-AGCH graph with E-TFCI event counter is displayed. After starting with the closed loop command the power is increased in 1 dB steps by activating pattern set 2 until the UE decreases the transmitted E-TFCI.

At this point set 3 is activated once to reduce the output power to the value at which the original E-TFCI, which is required for the sub-test, appears again.

For conducted power measurements the same steps are repeated in the power menu to read out the corresponding maximum RMS output power with the target E-TFCI.

For SAR measurements it is useful to switch to Code Domain Power vs. Time display.

Here the CMU200 shows relative power values (max. and min.) of each code channel which should roughly correspond to the numerators of the gain factors e.g. :

Sub-test	β_c	β_d	β_{hs}	β_{ec}	β_{ed}
5	15	15	30	24	134

By this way a surveillance of signalling conditions is possible to make sure that HSUPA code channels are active during the complete SAR measurement.

7.1.7 Conducted power measurements WLAN 2450 MHz

7.1.7.1 Earpiece 'ON'

802.11b		maximum average conducted output power [dBm]			
Band	Ch	1Mbps	2Mbps	5.5Mbps	11Mbps
2450MHz	1	15.4	15.5	15.9	15.6
	6	15.4	15.6	15.6	15.6
	11	15.7	15.6	15.7	15.5

Table 19: Test results conducted power measurement 802.11b

802.11g		maximum average conducted output power [dBm]							
Band	Ch	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
2450MHz	1	11.6	11.3	11.6	11.3	11.5	11.3	11.6	11.5
	6	15.5	15.5	15.3	15.3	15.4	15.3	15.1	13.2
	11	12.2	12.3	12.2	12.4	12.4	12.3	12.3	12.1

Table 20: Test results conducted power measurement 802.11g

802.11n HT-20		maximum average conducted output power [dBm]							
Band	Ch	MCS-0 6.5Mbps	MCS-1 13Mbps	MCS-2 19.5Mbps	MCS-3 26Mbps	MCS-4 39Mbps	MCS-5 52Mbps	MCS-6 58.5Mbps	MCS-7 65Mbps
2450MHz	1	11.6	11.6	11.4	11.5	11.5	11.5	11.5	11.5
	6	15.5	15.5	15.5	15.6	15.5	14.5	12.1	11.2
	11	12.2	12.5	12.2	12.4	12.3	12.3	12.3	11.2

Table 21: Test results conducted power measurement 802.11n HT-20

7.1.7.2 Earpiece 'OFF'

802.11b		maximum average conducted output power [dBm]			
Band	Ch	1Mbps	2Mbps	5.5Mbps	11Mbps
2450MHz	1	17.1	17.0	17.2	17.2
	6	18.0	18.2	18.5	18.3
	11	18.3	18.3	18.5	18.4

Table 22: Test results conducted power measurement 802.11b

802.11g		maximum average conducted output power [dBm]							
Band	Ch	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
2450MHz	1	11.6	11.3	11.6	11.3	11.5	11.3	11.6	11.5
	6	16.2	16.2	16.3	16.3	16.3	16.3	15.1	13.2
	11	12.2	12.3	12.2	12.4	12.4	12.3	12.3	12.1

Table 23: Test results conducted power measurement 802.11g

802.11n HT-20		maximum average conducted output power [dBm]							
Band	Ch	MCS-0 6.5Mbps	MCS-1 13Mbps	MCS-2 19.5Mbps	MCS-3 26Mbps	MCS-4 39Mbps	MCS-5 52Mbps	MCS-6 58.5Mbps	MCS-7 65Mbps
2450MHz	1	11.6	11.6	11.4	11.5	11.5	11.5	11.5	11.5
	6	16.3	16.4	16.4	16.4	15.5	14.5	12.1	11.2
	11	12.2	12.5	12.2	12.4	12.3	12.3	12.3	11.2

Table 24: Test results conducted power measurement 802.11n HT-20

7.1.8 Standalone SAR Test Exclusion

Standalone SAR test exclusion considerations for Head position					
Communication system	freq. (MHz)	P _{avg} * (dBm)	P _{avg} * (mW)	threshold _{1-g} comparison value	SAR test exclusion
GSM 850	835	25.4	346.7	63.4	no
GSM 1900	1900	23.4	218.8	60.3	no
UMTS FDD II	1900	23.4	218.8	60.3	no
UMTS FDD V	835	23.9	245.5	44.9	no
WLAN 2450	2450	16.5	44.7	14.0	no
Bluetooth 2450	2450	9.7	9.4	2.9	yes

Table 25: Standalone SAR test exclusion considerations in **head position**

Standalone SAR test exclusion considerations for Hot spot mode position						
Communication system	freq. (MHz)	distance (mm)	P _{avg} * (dBm)	P _{avg} * (mW)	threshold _{1-g} comparison value	SAR test exclusion
GSM 850	835	10	25.4	346.7	31.7	no
GSM 1900	1900	10	23.4	218.8	30.2	no
UMTS FDD II	1900	10	23.4	218.8	30.2	no
UMTS FDD V	835	10	23.9	245.5	22.4	no
WLAN 2450	2450	10	19.0	79.4	12.4	no
Bluetooth 2450	2450	10	9.7	9.4	1.5	yes

Table 26: Standalone SAR test exclusion considerations in **hotspot mode position**

P_{avg}* - maximum possible output power declared by manufacturer

The **1-g SAR test exclusion thresholds** for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where:

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Standalone SAR test exclusion considerations for Body worn position						
Communication system	freq. (MHz)	distance (mm)	P _{avg} * (dBm)	P _{avg} * (mW)	threshold _{1-g} comparison value	SAR test exclusion
GSM 850	835	15	25.4	346.7	21.1	no
GSM 1900	1900	15	23.4	218.8	20.1	no
UMTS FDD II	1900	15	23.4	218.8	20.1	no
UMTS FDD V	835	15	23.9	245.5	15.0	no
WLAN 2450	2450	15	19.0	79.4	8.3	no
Bluetooth 2450	2450	15	9.7	9.4	1.0	yes

Table 27: Standalone SAR test exclusion considerations in **body position**P_{avg}* - maximum possible output power declared by manufacturer

The **1-g SAR test exclusion thresholds** for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where:

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

7.1.9 Hotspot mode SAR measurement positions

Hotspot mode SAR measurement positions						
mode	front	rear	left edge	right edge	top edge	bottom edge
GSM 850	yes	yes	yes	yes	no	yes
GSM 1900	yes	yes	yes	yes	no	yes
WCDMA FDD II	yes	yes	yes	yes	no	yes
WCDMA FDD V	yes	yes	yes	yes	no	yes
WLAN 2450	yes	yes	yes	yes	yes	no

The edges with less than 2.5 cm distance to the TX antennas need to be tested for hotspot SAR.

Antenna dimensions and separation distances see in Annex Photo documentation

7.2 SAR test results

7.2.1 General description of test procedures

- The DUT is tested using CMU 200 and CMW 500 communications testers as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power.
- Test positions as described in the tables above are in accordance with the specified test standard.
- Tests in body position were performed in that configuration, which generates the highest time based averaged output power (see conducted power results).
- Tests in head position with GSM were performed in voice mode with 1 timeslot unless GPRS/EGPRS/DTM function allows parallel voice and data traffic on 2 or more timeslots (see section 2.4 for details).
- UMTS was tested in RMC mode with 12.2 kbit/s and TPC bits set to 'all 1'.
- WLAN was tested in 802.11b mode with 1 MBit/s. According to KDB 248227 the SAR testing for 802.11g/n is not required since the maximum power of 802.11g/n is less $\frac{1}{4}$ dB higher than maximum power of 802.11b.
- Required WLAN test channels were selected according to KDB 248227
- For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15 mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.
- According to FCC KDB pub 941225 D06 this device has been tested with 10 mm distance to the phantom for operation in WLAN hot spot mode.
- Per FCC KDB pub 941225 D06 the edges with antennas within 2.5 cm are required to be evaluated for SAR to cover WLAN hot spot function.
- For SAR measurements test samples with fixed **power back off** have been used in **WLAN 2450** mode for all configurations that require power back off during normal operation in **voice call**.
- According to IEEE 1528 the SAR test shall be performed at middle channel. Testing of top and bottom channel is optional.
- According to KDB 447498 D01 testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- IEEE 1528-2013 require the middle channel to be tested first. This generally applies to wireless devices that are designed to operate in technologies with tight tolerances for maximum output power variations across channels in the band. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

7.2.2 Results overview

measured / extrapolated SAR numbers - Head - GSM 850 MHz											
Ch.	Freq. (MHz)	time slots	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)
				declared**	measured	meas.	extrapolated	meas.	extrap.		
128	824.2	2	left cheek	31.4	31.0	0.747	0.819	0.584	0.640	0.020	21.3
190	836.6	2	left cheek	31.4	30.8	0.846	0.971	0.663	0.761	0.110	21.3
251	848.8	2	left cheek	31.4	30.8	0.917	1.053	0.712	0.817	0.000	21.3
190	836.6	2	left tilted 15°	31.4	30.8	0.448	0.514	0.354	0.406	0.010	21.3
128	824.2	2	right cheek	31.4	31.0	0.687	0.753	0.538	0.590	0.070	21.3
190	836.6	2	right cheek	31.4	30.8	0.778	0.893	0.610	0.700	-0.040	21.3
251	848.8	2	right cheek	31.4	30.8	0.877	1.007	0.677	0.777	0.140	21.3
190	836.6	2	right tilted 15°	31.4	30.8	0.433	0.497	0.339	0.389	0.100	21.3
251	848.8	2	left cheek*	31.4	30.8	0.912	1.047	0.713	0.819	0.080	21.3
EGPRS 3TS (8PSK)											
251	848.8	3	left cheek	26.6	26.2	0.431	0.473	0.335	0.367	-0.120	21.3

Table 28: Test results head SAR GSM 850MHz GMSK **2TS** in uplink (see max. SAR plot in Annex B.1: GSM 850MHz page 62)

Note: SAR measurements were performed in the configuration with highest calculated time based averaged output power (see section 7.1.1). Therefore 2 timeslots in uplink were used for test.

measured / extrapolated SAR numbers - hotspot mode - GSM 850 MHz											
Ch.	Freq. (MHz)	time slots	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)
				declared**	measured	meas.	extrap.	meas.	extrap.		
128	824.2	2	front	31.4	31.0	0.786	0.862	0.613	0.672	-0.010	22.6
190	836.6	2	front	31.4	30.8	0.870	0.999	0.678	0.778	0.030	22.6
251	848.8	2	front	31.4	30.8	0.902	1.036	0.699	0.803	0.040	22.6
128	824.2	2	rear	31.4	31.0	0.889	0.975	0.689	0.755	-0.030	22.6
190	836.6	2	rear	31.4	30.8	0.960	1.102	0.740	0.850	0.070	22.6
251	848.8	2	rear	31.4	30.8	1.010	1.160	0.774	0.889	-0.030	22.6
190	836.6	2	left edge	31.4	30.8	0.491	0.564	0.344	0.395	-0.020	22.6
190	836.6	2	right edge	31.4	30.8	0.489	0.561	0.339	0.389	0.100	22.6
190	836.6	2	bottom edge	31.4	30.8	0.086	0.099	0.053	0.061	-0.060	22.6
251	848.8	2	rear*	31.4	30.8	0.996	1.144	0.767	0.881	-0.030	22.6

Table 29: Test results hotspot mode SAR GSM 850 MHz (see max. SAR plot in Annex B.1:GSM 850MHz page 62)

Top edge position for hotspot mode is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

* - repeated at the highest SAR measurement according to the FCC KDB 865664

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Body worn - GSM 850 MHz												
Ch.	Freq. (MHz)	time slots	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
				declared**	measured	meas.	extrap.	meas.	extrap.			
128	824.2	2	front	31.4	31.0	0.676	0.741	0.521	0.571	-0.010	22.6	15
190	836.6	2	front	31.4	30.8	0.719	0.826	0.555	0.637	-0.030	22.6	15
251	848.8	2	front	31.4	30.8	0.777	0.892	0.595	0.683	-0.050	22.6	15
128	824.2	2	rear	31.4	31.0	0.725	0.795	0.555	0.609	0.030	22.6	15
190	836.6	2	rear	31.4	30.8	0.789	0.906	0.602	0.691	-0.060	22.6	15
251	848.8	2	rear	31.4	30.8	0.835	0.959	0.636	0.730	0.040	22.6	15

Table 30: Test results body worn SAR GSM 850 MHz (see max. SAR plot in Annex B.1:GSM 850MHz page 62)

* - repeated at the highest SAR measurement according to the FCC KDB 865664

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - GSM 1900 MHz												
Ch.	Freq. (MHz)	time slots	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
				declared**	measured	meas.	extrap.	meas.	extrap.			
512	1850.2	2	left cheek	29.4	29.0	0.812	0.890	0.522	0.572	-0.080	21.7	
661	1880.0	2	left cheek	29.4	29.2	0.869	0.910	0.550	0.576	-0.030	21.7	
810	1909.8	2	left cheek	29.4	29.2	0.840	0.880	0.529	0.554	0.000	21.7	
661	1880.0	2	left tilted 15°	29.4	29.2	0.401	0.420	0.257	0.269	0.020	21.7	
661	1880.0	2	right cheek	29.4	29.2	0.566	0.593	0.377	0.395	-0.050	21.7	
661	1880.0	2	right tilted 15°	29.4	29.2	0.476	0.498	0.296	0.310	0.000	21.7	
661	1880.0	2	left cheek*	29.4	29.2	0.887	0.929	0.563	0.590	-0.070	21.7	
EGPRS 4TS (8PSK)												
661	1880.0	4	left cheek	25.4	24.8	0.663	0.761	0.420	0.482	0.000	21.7	

Table 31: Test results head SAR GSM 1900MHz GMSK **2TS** in uplink (see max. SAR plot in Annex B.2: GSM 1900MHz page 65)

Note: SAR measurements were performed in the configuration with highest calculated time based averaged output power (see section 7.1.1). Therefore 2 timeslots in uplink were used for test.

measured / extrapolated SAR numbers - hotspot mode - GSM 1900 MHz												
Ch.	Freq. (MHz)	time slots	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
				declared**	measured	meas.	extrap.	meas.	extrap.			
661	1880.0	2	front	29.4	29.2	0.698	0.731	0.462	0.484	-0.030	22.2	10
512	1850.2	2	rear	29.4	29.0	0.715	0.784	0.472	0.518	-0.070	22.2	10
661	1880.0	2	rear	29.4	29.2	0.779	0.816	0.417	0.437	-0.050	22.2	10
810	1909.8	2	rear	29.4	29.2	0.799	0.837	0.423	0.443	-0.050	22.2	10
661	1880.0	2	left edge	29.4	29.2	0.584	0.612	0.357	0.374	-0.030	22.2	10
661	1880.0	2	right edge	29.4	29.2	0.220	0.230	0.135	0.141	0.030	22.2	10
661	1880.0	2	bottom edge	29.4	29.2	0.280	0.293	0.152	0.159	-0.050	22.2	10

Table 32: Test results hotspot mode SAR GSM 1900 MHz (see max. SAR plot in Annex B.2: GSM 1900MHz page 65)

Top edge position for hotspot mode is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

* - repeated at the highest SAR measurement according to the FCC KDB 865664

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Body worn - GSM 1900 MHz												
Ch.	Freq. (MHz)	time slots	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
				declared**	measured	meas.	extrap.	meas.	extrap.			
512	1850.2	2	front	29.4	29.2	0.444	0.465	0.294	0.308	-0.080	22.2	15
661	1880.0	2	front	29.4	29.2	0.460	0.482	0.304	0.318	0.060	22.2	15
810	1909.8	2	front	29.4	29.2	0.492	0.515	0.321	0.336	-0.010	22.2	15
661	1880.0	2	rear	29.4	29.2	0.440	0.461	0.290	0.304	0.050	22.2	15

Table 33: Test results body worn SAR GSM 1900 MHz (see max. SAR plot in Annex B.2: GSM 1900MHz page 65)

measured / extrapolated SAR numbers - Head - UMTS FDD II 1880 MHz												
Ch.	Freq. (MHz)	test cond.	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
				declared**	measured	meas.	extrap.	meas.	extrap.			
9262	1852.4	RMC	left cheek	23.4	23.1	0.735	0.788	0.473	0.507	-0.040	21.7	
9400	1880.0	RMC	left cheek	23.4	22.9	0.793	0.890	0.507	0.569	-0.040	21.7	
9538	1907.6	RMC	left cheek	23.4	22.9	0.853	0.957	0.539	0.605	-0.030	21.7	
9400	1880.0	RMC	left tilted 15°	23.4	22.9	0.316	0.355	0.203	0.228	-0.030	21.7	
9400	1880.0	RMC	right cheek	23.4	22.9	0.515	0.578	0.342	0.384	0.020	21.7	
9400	1880.0	RMC	right tilted 15°	23.4	22.9	0.379	0.425	0.236	0.265	0.070	21.7	
9538	1907.6	RMC	left cheek*	23.4	22.9	0.790	0.886	0.501	0.562	0.000	21.7	

Table 34: Test results head SAR UMTS FDD II 1880 MHz (see max. SAR plot in Annex B.3: UMTS FDD II page 68)

measured / extrapolated SAR numbers - hotspot mode - UMTS FDD II 1880 MHz												
Ch.	Freq. (MHz)	test cond.	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
				declared**	measured	meas.	extrap.	meas.	extrap.			
9262	1852.4	RMC	front	23.4	23.1	0.614	0.658	0.408	0.437	0.010	22.2	10
9400	1880.0	RMC	front	23.4	22.9	0.658	0.738	0.435	0.488	-0.030	22.2	10
9538	1907.6	RMC	front	23.4	22.9	0.699	0.784	0.458	0.514	-0.030	22.2	10
9400	1880.0	RMC	rear	23.4	22.9	0.620	0.696	0.337	0.378	0.000	22.2	10
9400	1880.0	RMC	left edge	23.4	22.9	0.602	0.675	0.366	0.411	-0.020	22.2	10
9400	1880.0	RMC	right edge	23.4	22.9	0.260	0.292	0.158	0.177	0.000	22.2	10
9400	1880.0	RMC	bottom edge	23.4	22.9	0.276	0.310	0.153	0.172	0.020	22.2	10

Test results hotspot mode SAR UMTS FDD II 1880 MHz (see max. SAR plot in Annex B.3: UMTS FDD II page 68)

Top edge position for MHS is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

* - repeated at the highest SAR measurement according to the FCC KDB 865664

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Body worn - UMTS FDD II 1880 MHz												
Ch.	Freq. (MHz)	test cond.	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
				declared**	measured	meas.	extrap.	meas.	extrap.			
9262	1852.4	RMC	front	23.4	23.1	0.407	0.436	0.270	0.289	-0.010	22.2	15
9400	1880.0	RMC	front	23.4	22.9	0.449	0.504	0.294	0.330	-0.170	22.2	15
9538	1907.6	RMC	front	23.4	22.9	0.458	0.514	0.298	0.334	-0.020	22.2	15
9400	1880.0	RMC	rear	23.4	22.9	0.364	0.408	0.240	0.269	0.000	22.2	15

Table 35: Test results body worn SAR UMTS FDD II 1880 MHz (see max. SAR plot in Annex B.3: UMTS FDD II page 68)

measured / extrapolated SAR numbers - Head - UMTS FDD V 850 MHz												
Ch.	Freq. (MHz)	test cond.	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
				declared**	measured	meas.	extrap.	meas.	extrap.			
4132	826.4	RMC	left cheek	23.9	23.4	0.633	0.710	0.494	0.554	0.030	21.3	
4182	836.4	RMC	left cheek	23.9	23.4	0.648	0.727	0.505	0.567	0.020	21.3	
4233	846.6	RMC	left cheek	23.9	23.5	0.692	0.759	0.533	0.584	0.000	21.3	
4182	836.4	RMC	left tilted 15°	23.9	23.4	0.130	0.146	0.103	0.116	0.120	21.3	
4182	836.4	RMC	right cheek	23.9	23.4	0.639	0.717	0.499	0.560	0.020	21.3	
4182	836.4	RMC	right tilted 15°	23.9	23.4	0.371	0.416	0.292	0.328	0.010	21.3	

Table 36: Test results head SAR UMTS FDD V 850 MHz (see max. SAR plot in Annex B.4: UMTS FDD V page 71)

measured / extrapolated SAR numbers - hotspot mode - UMTS FDD V 850 MHz												
Ch.	Freq. (MHz)	test cond.	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
				declared**	measured	meas.	extrap.	meas.	extrap.			
4182	836.4	RMC	front	23.9	23.4	0.702	0.788	0.549	0.616	0.040	22.2	10
4132	826.4	RMC	rear	23.9	23.4	0.790	0.886	0.609	0.683	0.090	22.2	10
4182	836.4	RMC	rear	23.9	23.4	0.799	0.896	0.615	0.690	0.000	22.2	10
4233	846.6	RMC	rear	23.9	23.5	0.819	0.898	0.629	0.690	0.080	22.2	10
4182	836.4	RMC	left edge	23.9	23.4	0.525	0.589	0.366	0.411	-0.040	22.2	10
4182	836.4	RMC	right edge	23.9	23.4	0.519	0.582	0.363	0.407	0.000	22.2	10
4182	836.4	RMC	bottom edge	23.9	23.4	0.071	0.080	0.044	0.049	0.020	22.2	10
4233	846.6	RMC	rear*	23.9	23.5	0.870	0.954	0.669	0.734	-0.040	22.2	10

Table 37: Test results hotspot mode SAR UMTS FDD V 850 MHz (see max. SAR plot in Annex B.4: UMTS FDD V page 71)

Top edge position for MHS is not required since the distance from the main antenna to the edge is greater than 2.5 cm.

measured / extrapolated SAR numbers - Body worn - UMTS FDD V 850 MHz												
Ch.	Freq. (MHz)	test cond.	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
				declared**	measured	meas.	extrap.	meas.	extrap.			
4182	836.4	RMC	front	23.9	23.4	0.611	0.686	0.470	0.527	0.000	22.2	15
4132	826.4	RMC	rear	23.9	23.4	0.633	0.710	0.483	0.542	-0.010	22.2	15
4182	836.4	RMC	rear	23.9	23.4	0.639	0.717	0.487	0.546	0.010	22.2	15
4233	846.6	RMC	rear	23.9	23.5	0.648	0.711	0.494	0.542	-0.010	22.2	15

Table 38: Test results body worn SAR UMTS FDD V 850 MHz (see max. SAR plot in Annex B.4: UMTS FDD V page 71)

* - repeated at the highest SAR measurement according to the FCC KDB 865664

** - maximum possible output power declared by manufacturer

measured / extrapolated SAR numbers - Head - WLAN 2450 MHz											
Ch.	Freq. (MHz)	test cond.	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)
				declared**	measured	meas.	extrap.	meas.	extrap.		
1	2412	1Mbit/s	left cheek	16.5	15.4	0.626	0.806	0.307	0.395	0.030	20.9
6	2437	1Mbit/s	left cheek	16.5	15.4	0.632	0.814	0.312	0.402	0.110	20.9
11	2462	1Mbit/s	left cheek	16.5	15.7	0.573	0.689	0.282	0.339	0.030	20.9
11	2462	1Mbit/s	left tilted 15°	16.5	15.7	0.415	0.499	0.192	0.231	0.080	20.9
11	2462	1Mbit/s	right cheek	16.5	15.7	0.283	0.340	0.155	0.186	0.010	20.9
11	2462	1Mbit/s	right tilted 15°	16.5	15.7	0.215	0.258	0.110	0.132	-0.020	20.9

Table 39: Test results head SAR WLAN 2450 MHz (see max. SAR plot in Annex B.5: WLAN 2450MHz page 71)

measured / extrapolated SAR numbers - hotspot mode - WLAN 2450 MHz												
Ch.	Freq. (MHz)	test cond.	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
				declared**	measured	meas.	extrap.	meas.	extrap.			
11	2462	1Mbit/s	front	19.0	18.3	0.214	0.251	0.114	0.134	0.110	21.7	10
1	2412	1Mbit/s	rear	18.0	17.1	0.247	0.304	0.117	0.144	-0.020	21.7	10
6	2437	1Mbit/s	rear	19.0	18.0	0.316	0.398	0.150	0.189	0.070	21.7	10
11	2462	1Mbit/s	rear	19.0	18.3	0.294	0.345	0.137	0.161	-0.010	21.7	10
11	2462	1Mbit/s	left edge	19.0	18.3	0.040	0.047	0.014	0.017	-0.080	21.7	10
11	2462	1Mbit/s	right edge	19.0	18.3	0.119	0.140	0.066	0.078	0.110	21.7	10
11	2462	1Mbit/s	top edge	19.0	18.3	0.091	0.107	0.049	0.057	-0.060	21.7	10

Table 40: Test results hotspot mode SAR WLAN 2450 MHz (see max. SAR plot in Annex B.5: WLAN 2450MHz page 71)

Bottom side edge positions for hotspot mode are not required since the distance from the WLAN antenna to the edge is greater than 2.5cm.

measured / extrapolated SAR numbers - Body worn - WLAN 2450 MHz												
Ch.	Freq. (MHz)	test cond.	Position	cond. P _{max} (dBm)		SAR _{1g} results(W/kg)		SAR _{10g} (W/kg)		power drift (dB)	liquid (°C)	dist. (mm)
				declared**	measured	meas.	extrap.	meas.	extrap.			
11	2462	1Mbit/s	front	19.0	18.3	0.104	0.122	0.058	0.068	-0.010	21.7	15
1	2412	1Mbit/s	rear	18.0	17.1	0.094	0.116	0.051	0.063	0.120	21.7	15
6	2437	1Mbit/s	rear	19.0	18.0	0.128	0.161	0.066	0.083	-0.030	21.7	15
11	2462	1Mbit/s	rear	19.0	18.3	0.123	0.145	0.064	0.075	-0.020	21.7	15

Table 41: Test results body worn SAR WLAN 2450 MHz (see max. SAR plot in Annex B.5: WLAN 2450MHz page 71)

** - maximum possible output power declared by manufacturer

Estimated stand alone SAR.					
Communication system		freq. (GHz)	distance (mm)	P _{avg} (dBm)	P _{avg} (mW)
Bluetooth 2450		2.45	5	9.7	9.4
Bluetooth 2450		2.45	15	9.7	9.4

Table 42: Estimated stand alone SAR_{max} for Bluetooth 2450MHz head and body

7.2.3 Multiple Transmitter Information

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v05.

reported SAR WWAN and WLAN 2.4GHz , ΣSAR evaluation, SPLSR_i						
Frequency band	Position	SARmax /W/kg		ΣSAR <1.6W/kg	distance R_i , mm	ratio ≤ 0.040
		WWAN	WLAN			
GSM 850	left cheek	1.053	0.814	1.867	68.0	0.038
	left tilted 15°	0.514	0.499	1.013		
	right cheek	1.007	0.340	1.347		
	right tilted 15°	0.497	0.258	0.755		
	front 10mm	1.036	0.251	1.287		
	rear 10mm	1.160	0.398	1.558		
	front 15mm	0.892	0.122	1.014		
	rear 15mm	0.959	0.161	1.120		
GSM 1900	left cheek	0.929	0.814	1.743	83.4	0.028
	left tilted 15°	0.420	0.499	0.919		
	right cheek	0.593	0.340	0.933		
	right tilted 15°	0.498	0.258	0.756		
	front 10mm	0.731	0.251	0.982		
	rear 10mm	0.837	0.398	1.235		
	front 15mm	0.515	0.122	0.637		
	rear 15mm	0.461	0.161	0.622		
UMTS FDD II	left cheek	0.957	0.814	1.771	82.2	0.029
	left tilted 15°	0.355	0.499	0.854		
	right cheek	0.578	0.340	0.918		
	right tilted 15°	0.425	0.258	0.683		
	front 10mm	0.784	0.251	1.035		
	rear 10mm	0.696	0.398	1.094		
	front 15mm	0.514	0.122	0.636		
	rear 15mm	0.408	0.161	0.569		
WCDMA FDD V	left cheek	0.760	0.814	1.574		
	left tilted 15°	0.146	0.499	0.645		
	right cheek	0.717	0.340	1.057		
	right tilted 15°	0.416	0.258	0.674		
	front 10mm	0.788	0.251	1.039		
	rear 10mm	0.898	0.398	1.296		
	front 15mm	0.686	0.122	0.808		
	rear 15mm	0.717	0.161	0.878		

Table 43: SAR_{max} **WWAN** and **WLAN 2.4GHz**, **ΣSAR** evaluation, **SPLSR_i**

reported SAR WWAN and WLAN 2.4GHz , CombinedSAR evaluation				
Frequency band	Position	SARmax /W/kg		Combined SAR <1.6W/kg
		WWAN	WLAN	
GSM 850	left cheek	1.053	0.814	1.160
	left tilted 15°	0.514	0.499	0.696
	right cheek	1.007	0.340	1.060
	right tilted 15°	0.497	0.258	0.549
	front 10mm	1.036	0.251	1.130
	rear 10mm	1.160	0.398	1.250
	front 15mm	0.892	0.122	0.958
	rear 15mm	0.959	0.161	0.997
GSM 1900	left cheek	0.929	0.814	0.893
	left tilted 15°	0.420	0.499	0.661
	right cheek	0.593	0.340	0.625
	right tilted 15°	0.498	0.258	0.628
	front 10mm	0.731	0.251	0.797
	rear 10mm	0.837	0.398	0.870
	front 15mm	0.515	0.122	0.565
	rear 15mm	0.461	0.161	0.560
UMTS FDD II	left cheek	0.957	0.814	0.949
	left tilted 15°	0.355	0.499	0.632
	right cheek	0.578	0.340	0.606
	right tilted 15°	0.425	0.258	0.546
	front 10mm	0.784	0.251	0.864
	rear 10mm	0.696	0.398	0.819
	front 15mm	0.514	0.122	0.566
	rear 15mm	0.408	0.161	0.496
WCDMA FDD V	left cheek	0.760	0.814	0.909
	left tilted 15°	0.146	0.499	0.531
	right cheek	0.717	0.340	0.774
	right tilted 15°	0.416	0.258	0.474
	front 10mm	0.788	0.251	0.893
	rear 10mm	0.898	0.398	1.030
	front 15mm	0.686	0.122	0.748
	rear 15mm	0.717	0.161	0.761

Table 44: SAR_{max} **WWAN** and **WLAN 2.4GHz**, Combined SAR evaluation (worst case see in Annex B.6: Combined Multi Band Fast SAR page 78)

reported SAR WWAN and Bluetooth 2.4GHz , ΣSAR evaluation, SPLSRI						
Frequency band	Position	SARmax /W/kg		ΣSAR <1.6W/kg	distance Ri , mm	ratio ≤ 0.040
		WWAN	Bluetooth			
GSM 850	left cheek	1.053	0.393	1.446		
	left tilted 15°	0.514	0.393	0.907		
	right cheek	1.007	0.393	1.400		
	right tilted 15°	0.497	0.393	0.890		
	front 15mm	0.892	0.131	1.023		
	rear 15mm	0.959	0.131	1.090		
GSM 1900	left cheek	0.929	0.393	1.322		
	left tilted 15°	0.420	0.393	0.813		
	right cheek	0.593	0.393	0.986		
	right tilted 15°	0.498	0.393	0.891		
	front 15mm	0.515	0.131	0.646		
	rear 15mm	0.461	0.131	0.592		
UMTS FDD II	left cheek	0.957	0.393	1.350		
	left tilted 15°	0.355	0.393	0.748		
	right cheek	0.578	0.393	0.971		
	right tilted 15°	0.425	0.393	0.818		
	front 15mm	0.514	0.131	0.645		
	rear 15mm	0.408	0.131	0.539		
WCDMA FDD V	left cheek	0.760	0.393	1.153		
	left tilted 15°	0.146	0.393	0.539		
	right cheek	0.717	0.393	1.110		
	right tilted 15°	0.416	0.393	0.809		
	front 15mm	0.686	0.131	0.817		
	rear 15mm	0.717	0.131	0.848		



Table 45: SAR_{max} WWAN and **Bluetooth 2450MHz**, ΣSAR evaluationMinimum antenna separation distance between MAIN antenna and Bluetooth antenna – **115.5 mm**

Conclusion:



Σ SAR > 1.6 W/kg, but SAR-to-(peak-locations spacing) **ratio (SPLSR_i)** is less than **0.04** therefore simultaneous transmissions SAR measurement with the enlarged zoom scan measurement and volume scan post-processing procedures is **not** required.

7.2.4 SAR peak location separation



GSM850 + WLAN2450 left cheek

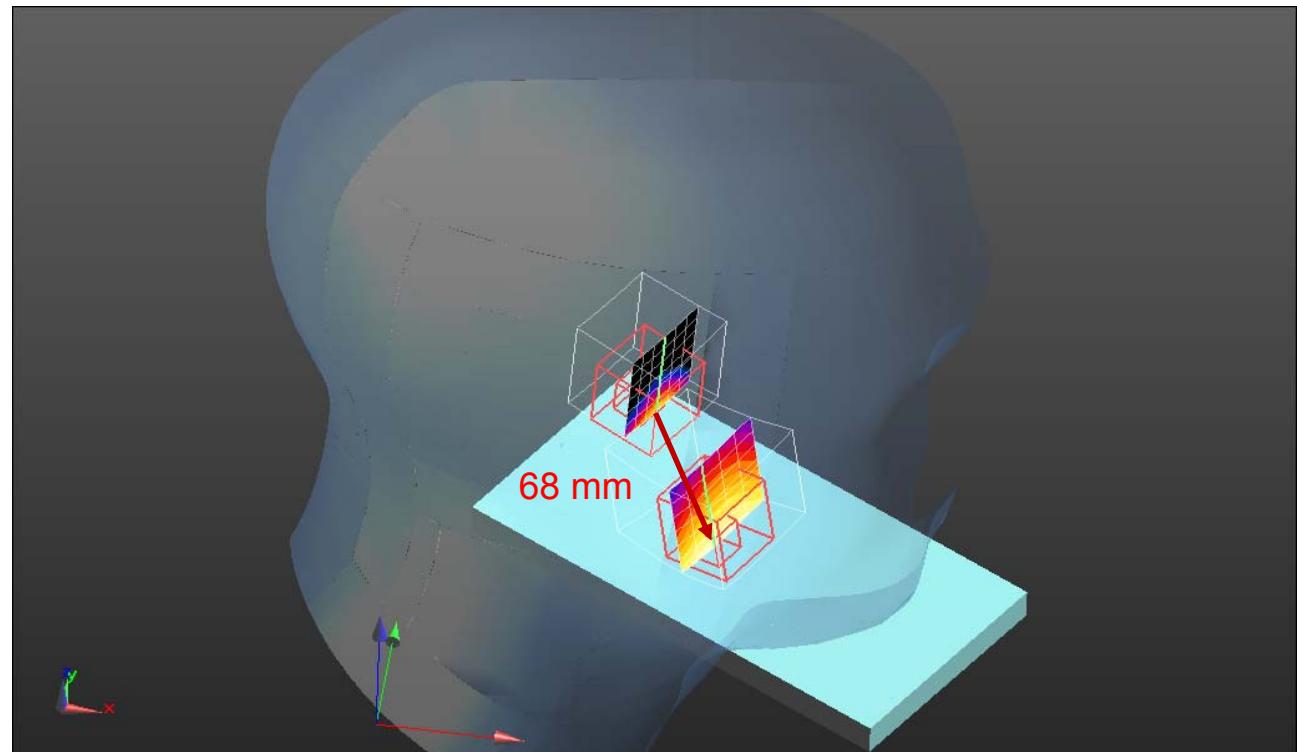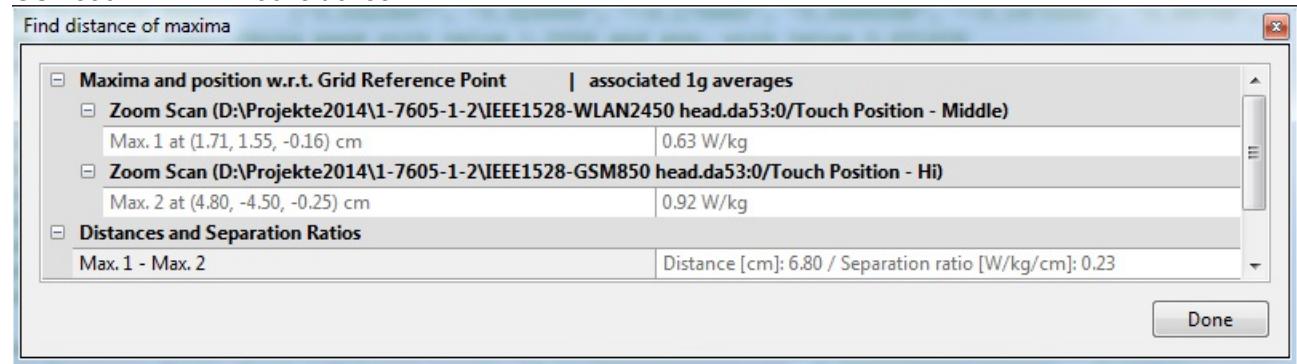

GSM1900 + WLAN2450 left cheek

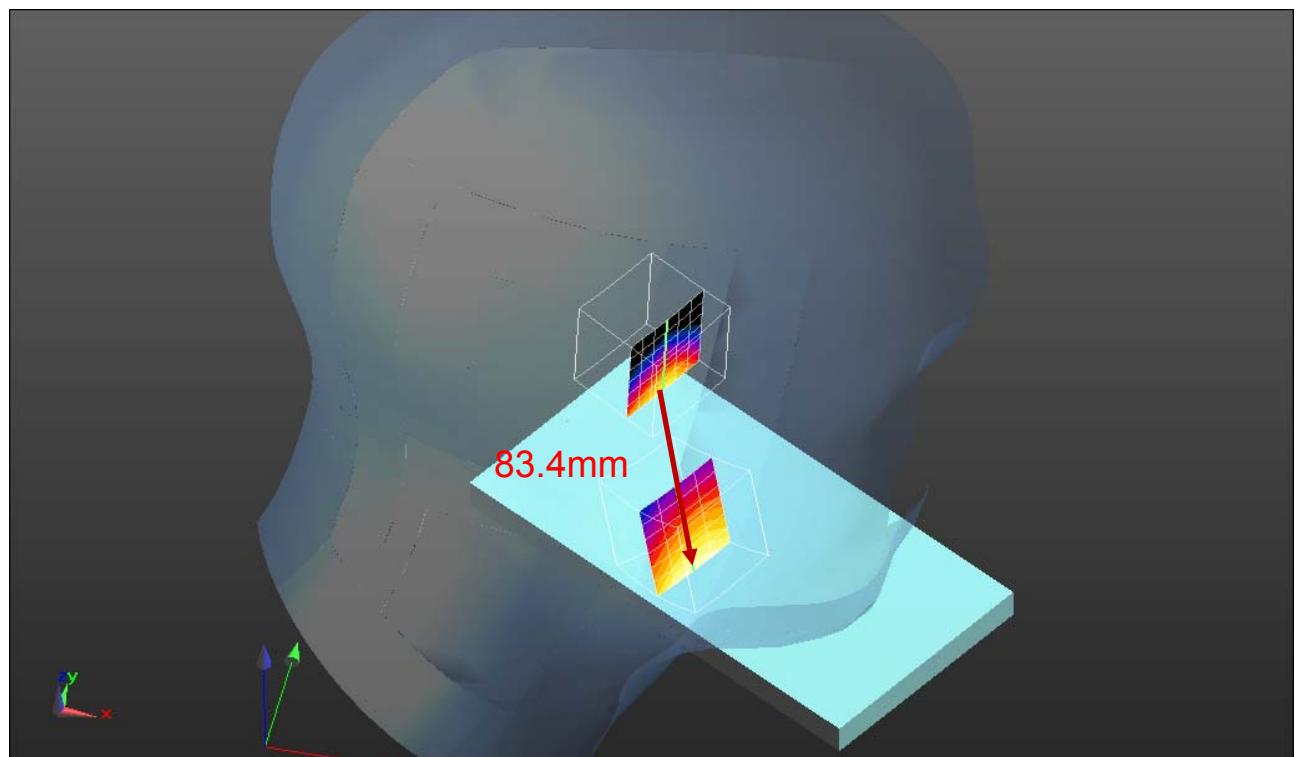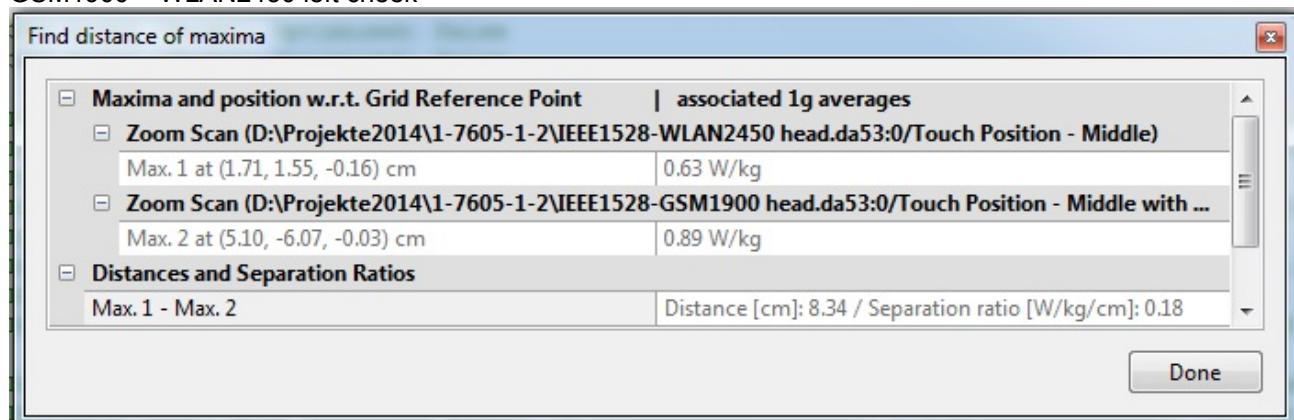

UMTS FDD II + WLAN2450 left cheek

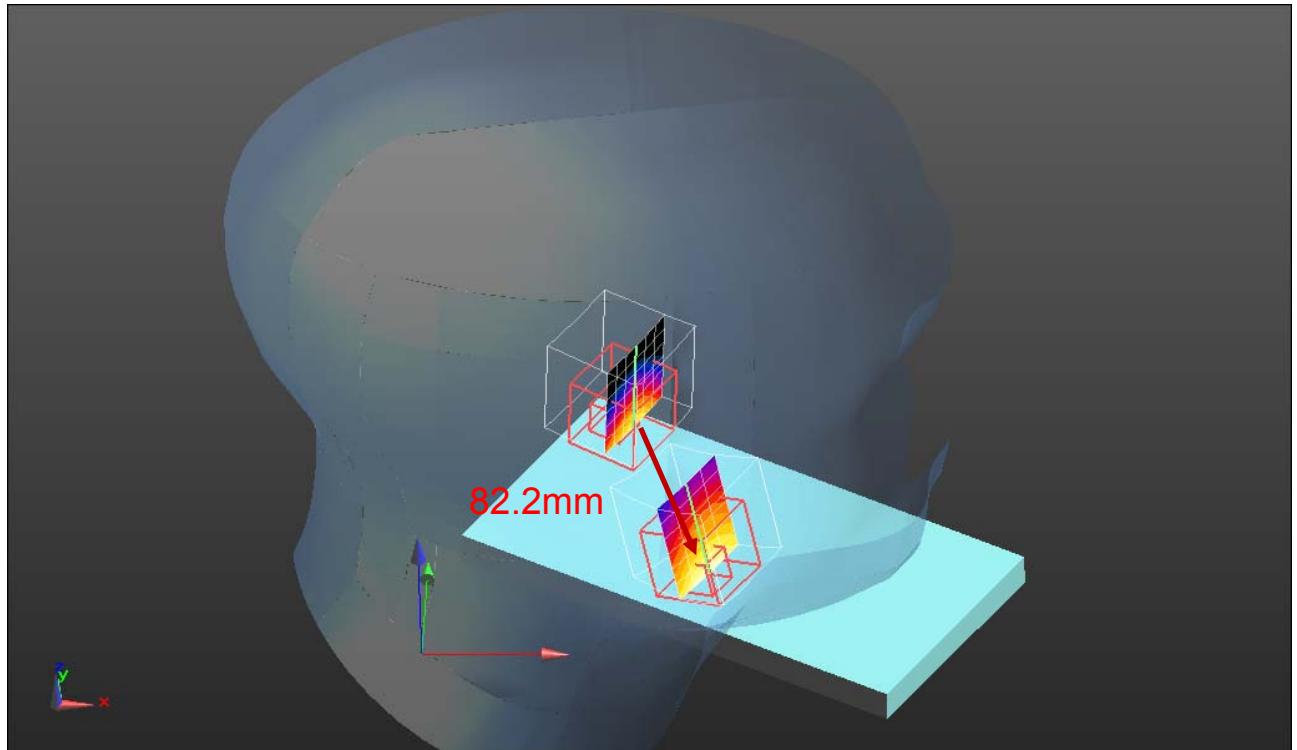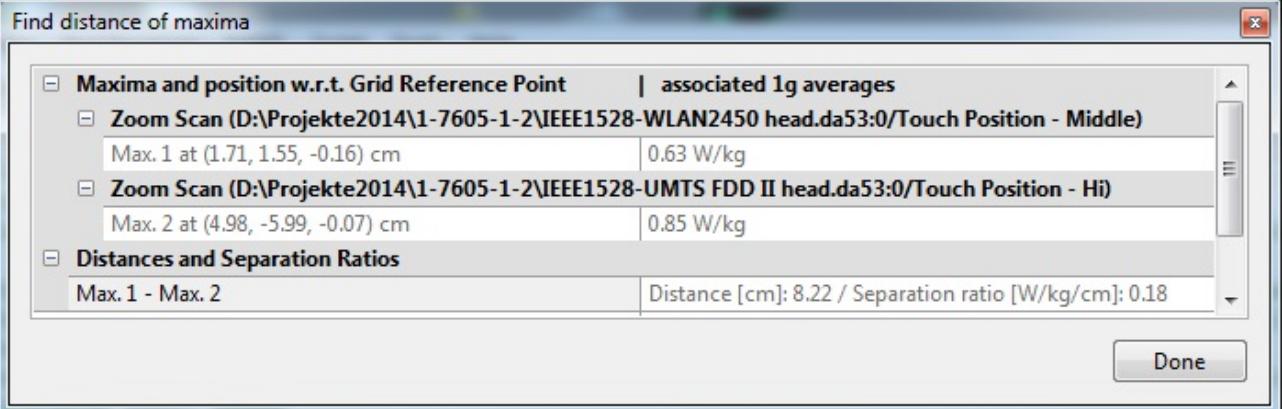

8 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

Equipment	Type	Manufacturer	Serial No.	Last Calibration	Frequency (months)
Dosimetric E-Field Probe	ES3DV3	Schmid & Partner Engineering AG	3320	May 09, 2014	12
835 MHz System Validation Dipole	D835V2	Schmid & Partner Engineering AG	4d153	June 06, 2013	24
1900 MHz System Validation Dipole	D1900V2	Schmid & Partner Engineering AG	5d009	May 15, 2013	24
2450 MHz System Validation Dipole	D2450V2	Schmid & Partner Engineering AG	710	August 11, 2014	24
Data acquisition electronics	DAE3V1	Schmid & Partner Engineering AG	477	May 14, 2014	12
Software	DASY52 52.8.7	Schmid & Partner Engineering AG	---	N/A	--
Triple Modular Flat Phantom V5.1	QD 000 P51 C	Schmid & Partner Engineering AG	1154	N/A	--
SAM Twin Phantom V5.0	QD 000 P40 C	Schmid & Partner Engineering AG	1813	N/A	--
Universal Radio Communication Tester	CMU 200	Rohde & Schwarz	106826	January 27, 2014	24
Network Analyser 300 kHz to 6 GHz	8753ES	Hewlett Packard)*	US39174436	January 28, 2014	24
Dielectric Probe Kit	85070C	Hewlett Packard	US99360146	N/A	12
Signal Generator	8671B	Hewlett Packard	2823A00656	January 22, 2014	24
Amplifier	25S1G4 (25 Watt)	Amplifier Reasearch	20452	N/A	--
Power Meter	NRP	Rohde & Schwarz	101367	January 21, 2014	24
Power Meter Sensor	NRP Z22	Rohde & Schwarz	100227	January 21, 2014	12
Power Meter Sensor	NRP Z22	Rohde & Schwarz	100234	January 21, 2014	12
Directional Coupler	778D	Hewlett Packard	19171	January 21, 2014	12

)* : Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

9 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A: System performance check

Date/Time: 10.12.2014 07:56:39

SystemPerformanceCheck-D835 head 2014-12-10**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d153**

Communication System: UID 0, CW (0); Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.566$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(6.15, 6.15, 6.15); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY5 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL835/d=15mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1): Interpolatedgrid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 10.2 W/kg


HSL835/d=15mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x8x7)/Cube 0:Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 108.7 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 14.0 W/kg

SAR(1 g) = 9.69 W/kg; SAR(10 g) = 6.41 W/kg

Maximum value of SAR (measured) = 10.4 W/kg

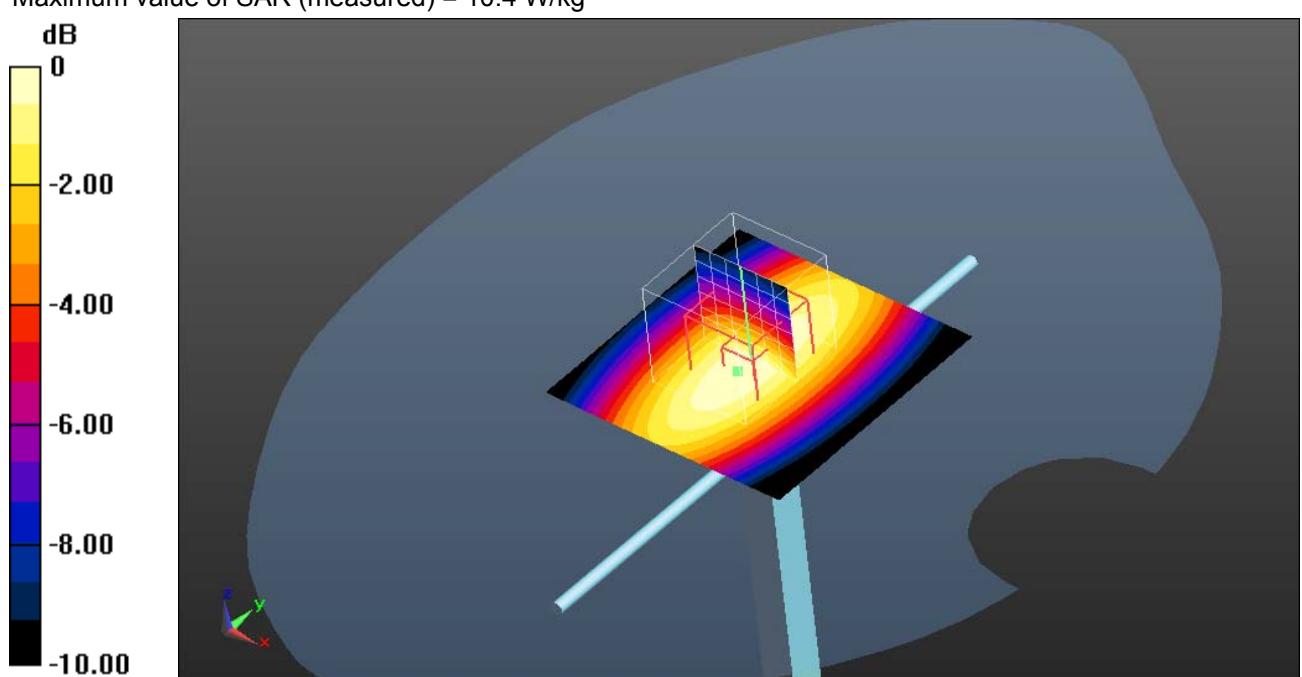

0 dB = 10.4 W/kg = 10.17 dBW/kg

Additional information:

ambient temperature: 22.7°C; liquid temperature: 21.3°C

Date/Time: 18.12.2014 14:22:22

SystemPerformanceCheck-D835 body 2014-12-18**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d153**

Communication System: UID 0, CW (0); Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 54.458$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(6.14, 6.14, 6.14); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL835/d=15mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 10.4 W/kg


MSL835/d=15mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 104.9 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 14.2 W/kg

SAR(1 g) = 9.83 W/kg; SAR(10 g) = 6.53 W/kg

Maximum value of SAR (measured) = 10.6 W/kg

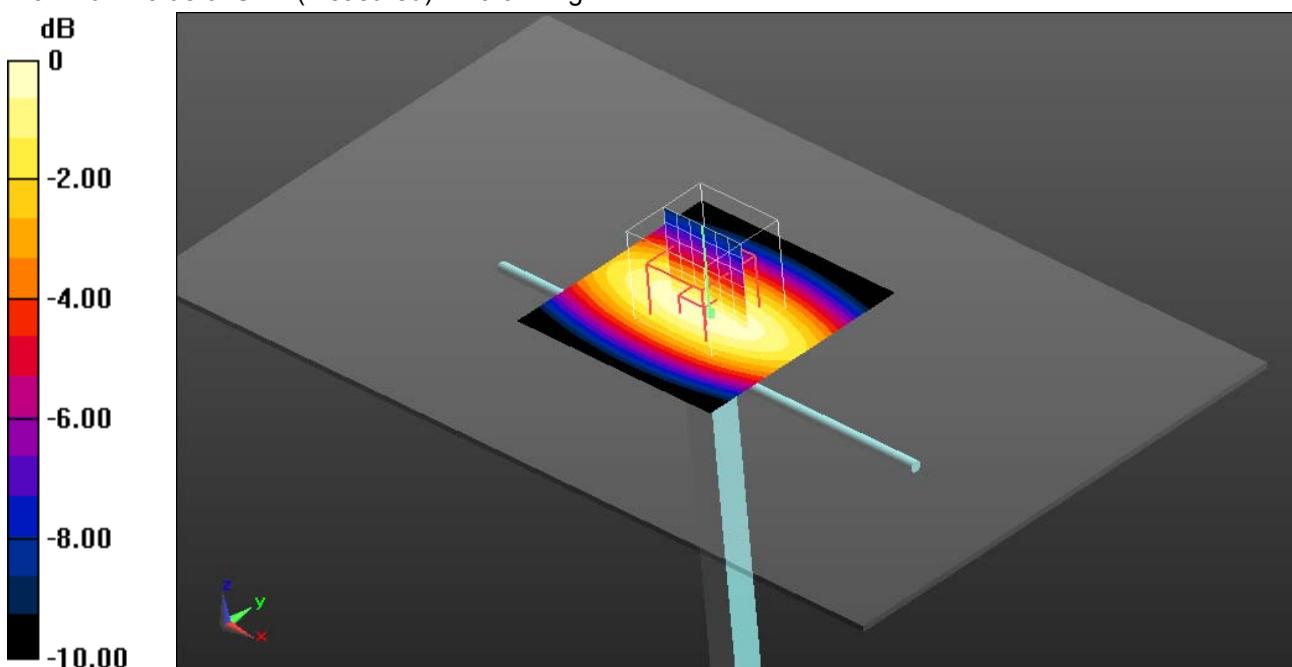

0 dB = 10.6 W/kg = 10.25 dBW/kg

Additional information:

ambient temperature: 23.8°C; liquid temperature: 22.2°C

Date/Time: 15.12.2014 10:49:38

SystemPerformanceCheck-D1900 head 2014-12-15**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d009**

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.563$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.94, 4.94, 4.94); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 51.5 W/kg


HSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 176.6 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 73.1 W/kg

SAR(1 g) = 39.2 W/kg; SAR(10 g) = 20.5 W/kg

Maximum value of SAR (measured) = 43.7 W/kg

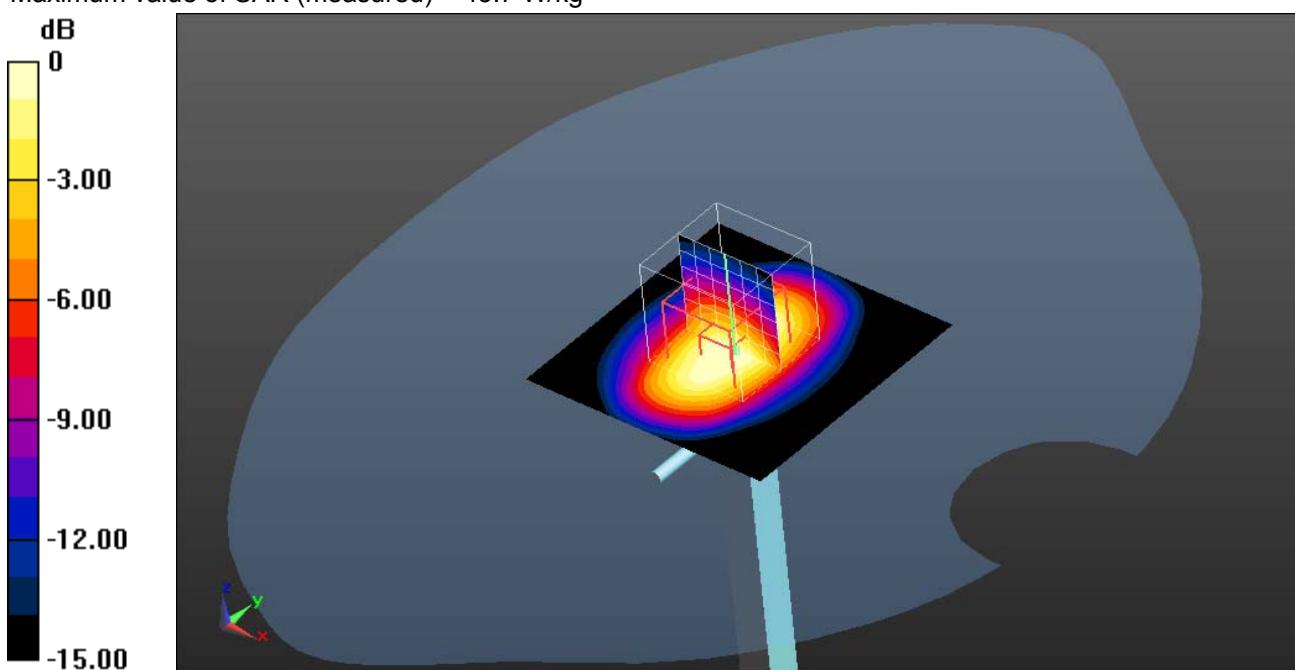**Additional information:**

ambient temperature: 23.7°C; liquid temperature: 22.6°C

Date/Time: 18.12.2014 19:41:21

SystemPerformanceCheck-D1900 body 2014-12-18**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d009**

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.507$ S/m; $\epsilon_r = 53.407$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.7, 4.7, 4.7); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 52.3 W/kg


MSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 171.0 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 67.6 W/kg

SAR(1 g) = 38.5 W/kg; SAR(10 g) = 20.6 W/kg

Maximum value of SAR (measured) = 43.0 W/kg

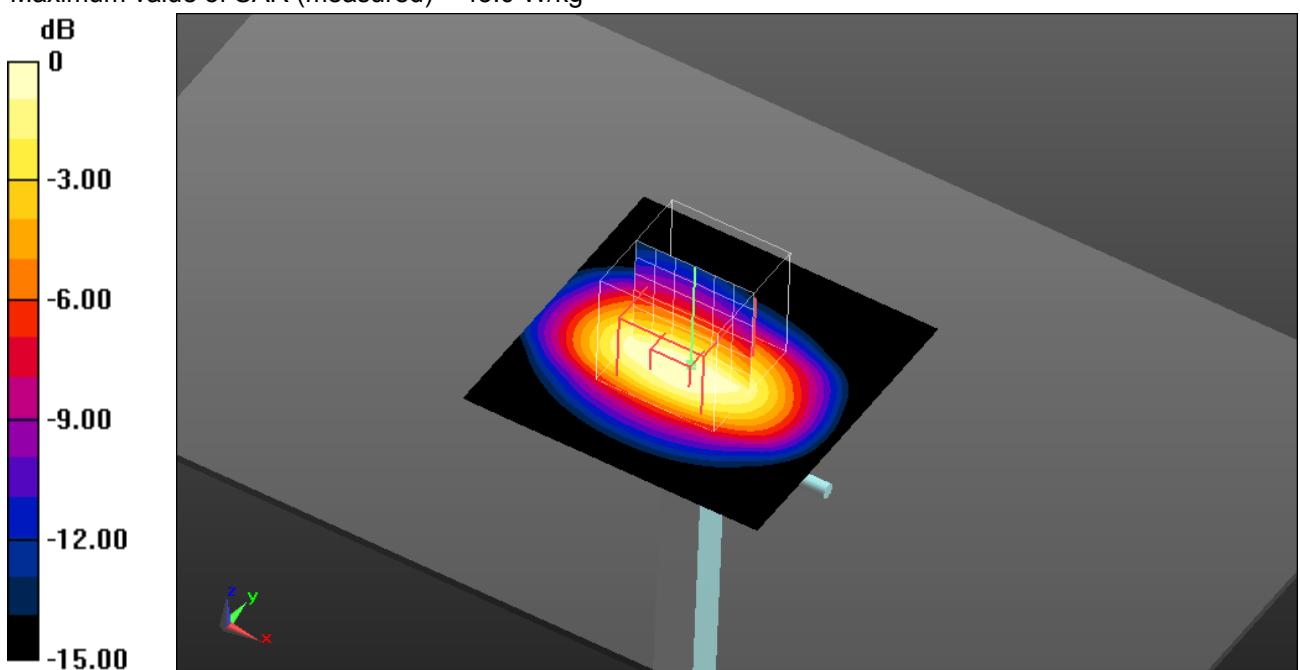**Additional information:**

ambient temperature: 24.3°C; liquid temperature: 22.2°C

Date/Time: 19.12.2014 10:53:39

SystemPerformanceCheck-D1900 body 2014-12-19**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d009**

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.507$ S/m; $\epsilon_r = 53.407$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.7, 4.7, 4.7); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 52.7 W/kg


MSL1900/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (8x7x7)/Cube 0:Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 170.5 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 68.1 W/kg

SAR(1 g) = 38.7 W/kg; SAR(10 g) = 20.5 W/kg

Maximum value of SAR (measured) = 43.7 W/kg

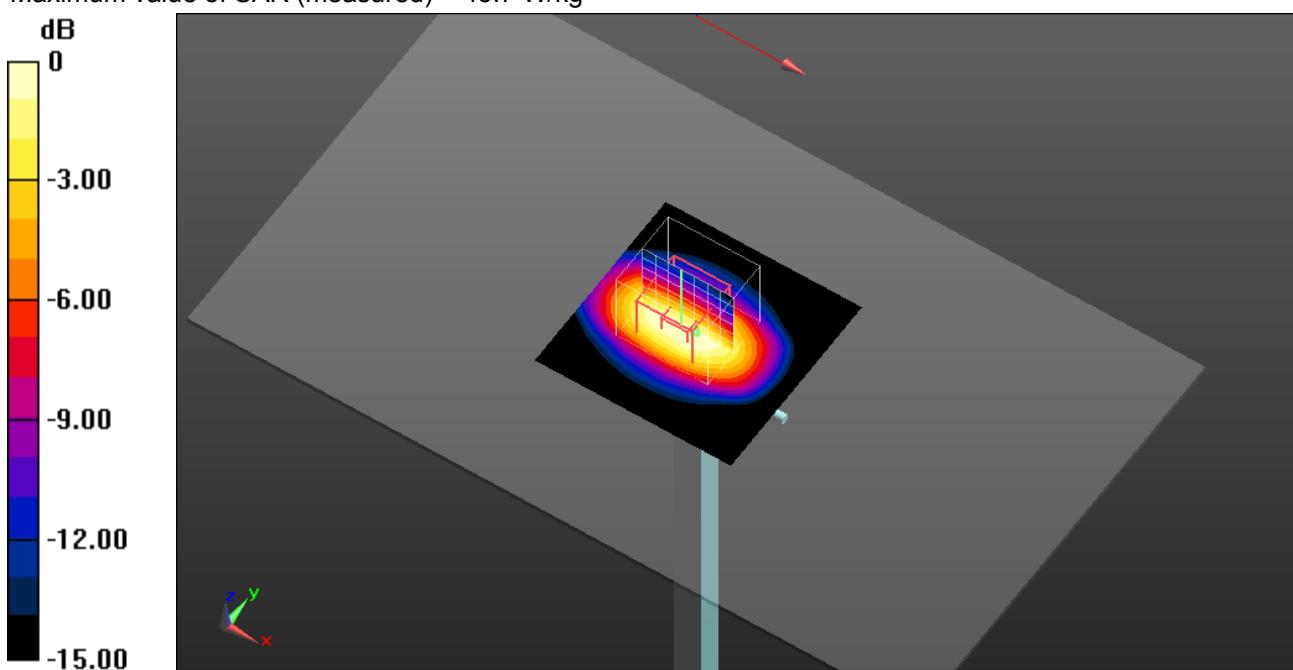

0 dB = 43.7 W/kg = 16.40 dBW/kg

Additional information:

ambient temperature: 23.8°C; liquid temperature: 22.2°C

Date/Time: 22.12.2014 09:41:07

SystemPerformanceCheck-D2450 head 2014-12-22**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 710**

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 38.661$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.4, 4.4, 4.4); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL2450/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 77.7 W/kg


HSL2450/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 187.6 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 117 W/kg

SAR(1 g) = 55.8 W/kg; SAR(10 g) = 25.8 W/kg

Maximum value of SAR (measured) = 62.9 W/kg

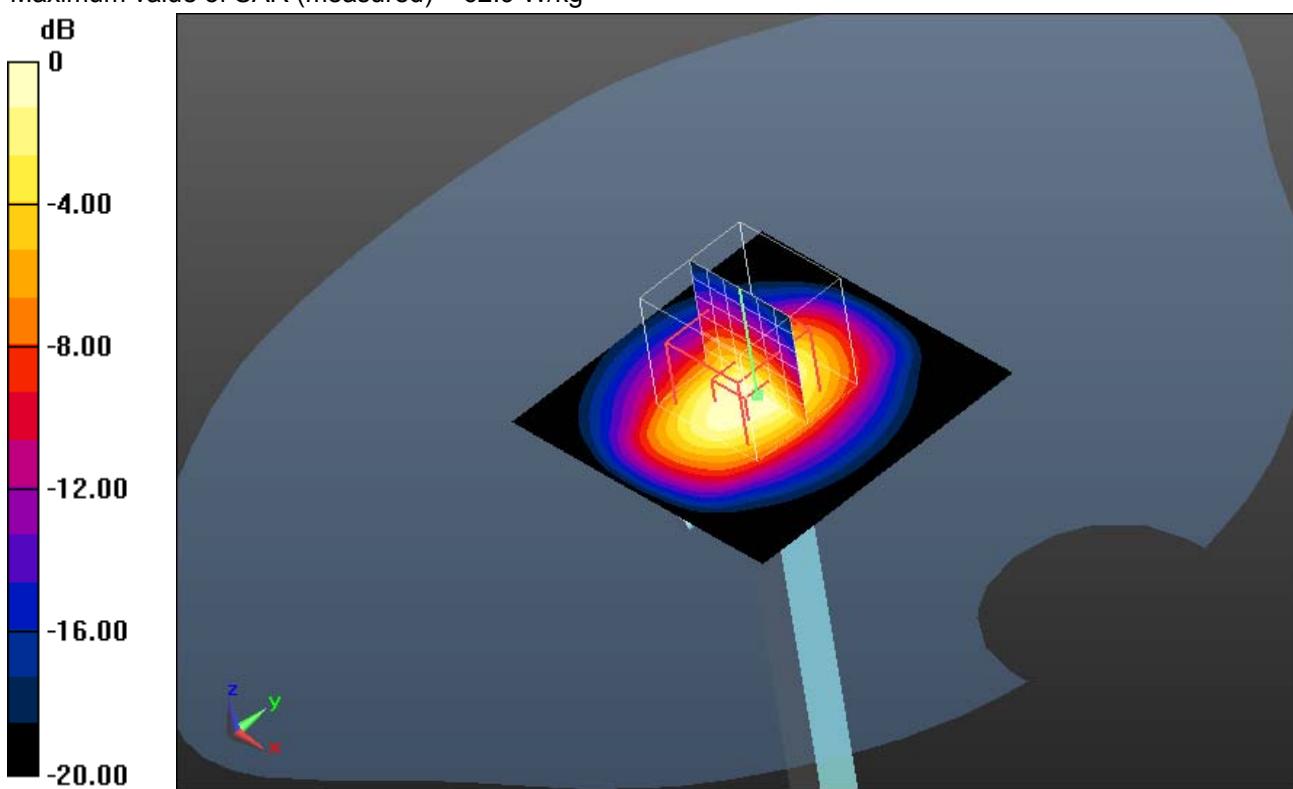

0 dB = 62.9 W/kg = 17.99 dBW/kg

Additional information:

ambient temperature: 22.5°C; liquid temperature: 20.4°C

Date/Time: 23.12.2014 10:09:27

SystemPerformanceCheck-D2450 body 2014-12-23**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 710**

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.969$ S/m; $\epsilon_r = 51.214$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.3, 4.3, 4.3); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

HSL2450/d=10mm, Pin=1000 mW, dist=4.0mm/Area Scan (51x51x1):Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 68.4 W/kg


HSL2450/d=10mm, Pin=1000 mW, dist=4.0mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 165.8 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 104 W/kg

SAR(1 g) = 49.5 W/kg; SAR(10 g) = 22.9 W/kg

Maximum value of SAR (measured) = 56.7 W/kg

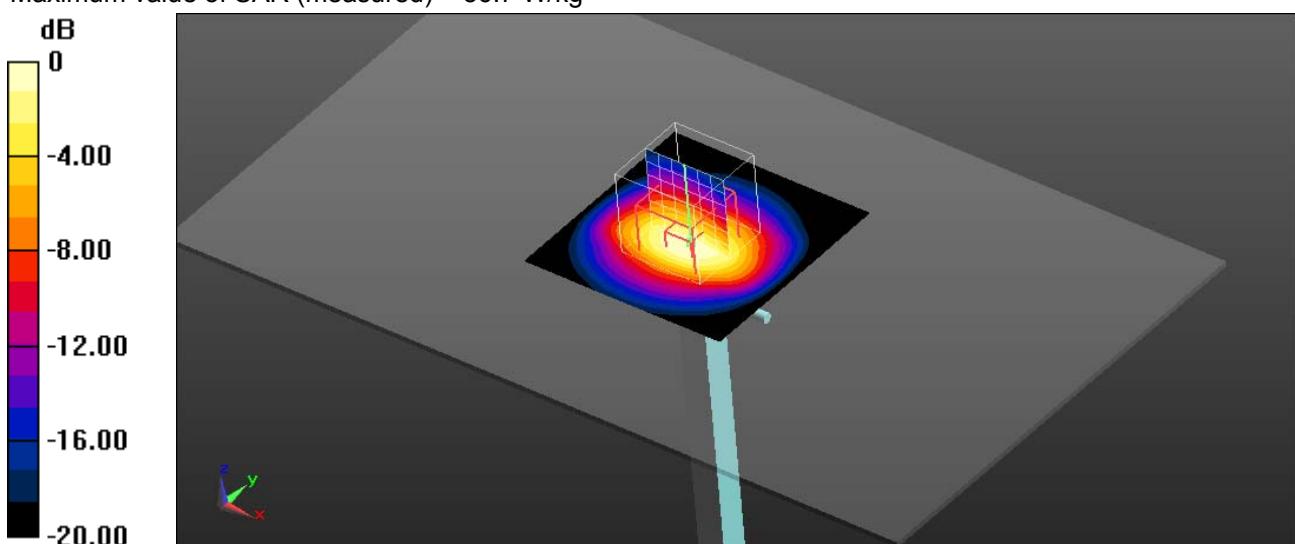

0 dB = 56.7 W/kg = 17.54 dBW/kg

Additional information:

ambient temperature: 22.9°C; liquid temperature: 21.7°C

Annex B: DASY5 measurement results

SAR plots for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination according to FCC KDB 865664 D02

Annex B.1: GSM 850MHz

Date/Time: 10.12.2014 12:07:43

IEEE1528-GSM850 head

DUT: Microsoft; Type: RM-1077; Serial: SAR 1

Communication System: UID 0, GSM/GPRS 2TS (0); Communication System Band: GSM 850; Frequency: 848.8 MHz; Communication System PAR: 6.021 dB; PMF: 2.00009

Medium parameters used: $f = 849$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 41.417$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(6.15, 6.15, 6.15); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left-Hand-Side HSL/Touch Position - Hi/Area Scan (81x141x1): Interpolated grid:

$dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.958 W/kg

Left-Hand-Side HSL/Touch Position - Hi/Zoom Scan (6x6x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 31.721 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.917 W/kg; SAR(10 g) = 0.712 W/kg

Maximum value of SAR (measured) = 0.966 W/kg

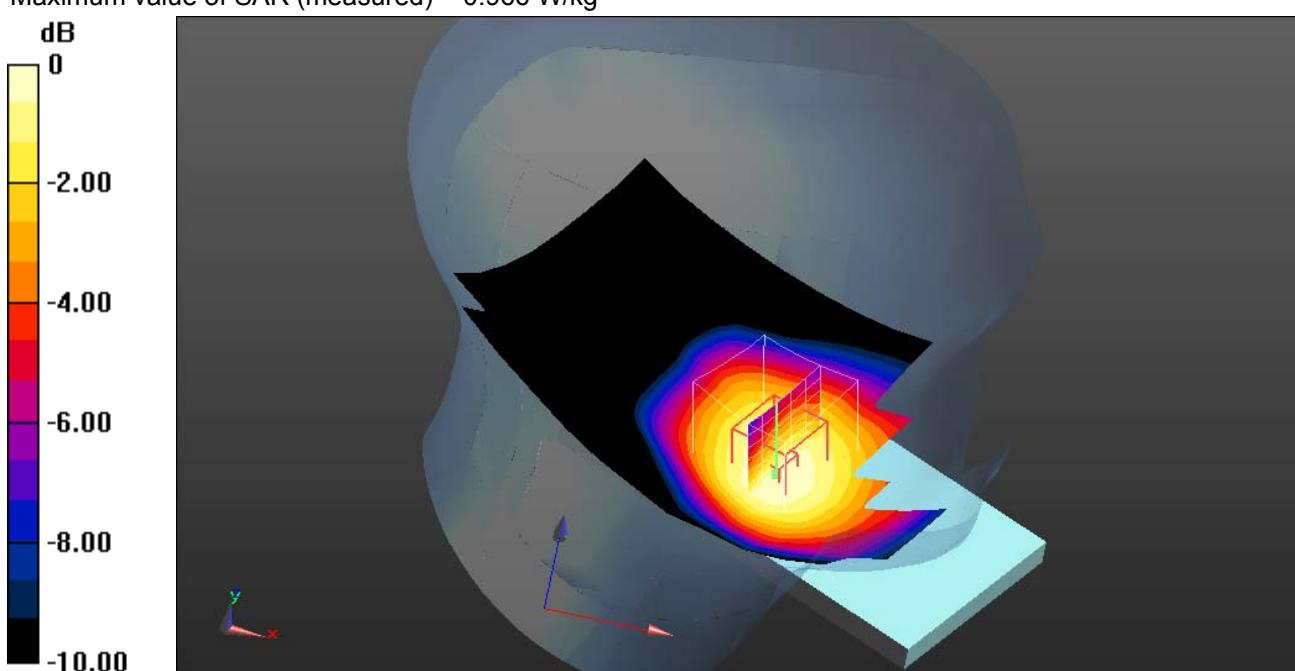**Additional information:**

ambient temperature: 22.7°C; liquid temperature: 21.3°C

Date/Time: 18.12.2014 16:49:18

FCC GSM850 hotspot**DUT: Microsoft; Type: RM-1077; Serial: SAR 1**

Communication System: UID 0, GSM/GPRS 2TS (0); Communication System Band: GSM 850; Frequency: 848.8 MHz; Communication System PAR: 6.021 dB; PMF: 2.00009

Medium parameters used: $f = 849$ MHz; $\sigma = 1.011$ S/m; $\epsilon_r = 54.302$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(6.14, 6.14, 6.14); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL835-10mm/Rear High/Area Scan (81x141x1): Interpolated grid: dx=1.500 mm,

dy=1.500 mm

Maximum value of SAR (interpolated) = 1.09 W/kg


MSL835-10mm/Rear High/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 32.742 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.774 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

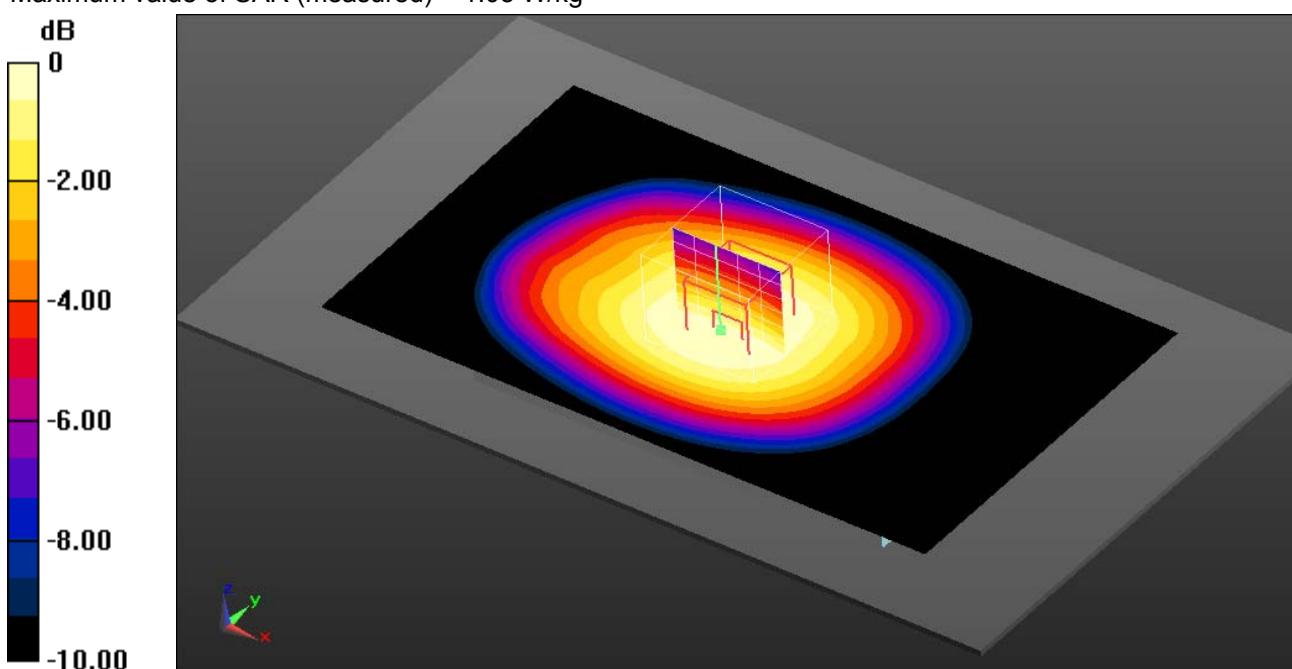

0 dB = 1.05 W/kg = 0.21 dBW/kg

Additional information:

position or distance of DUT to SAM: 10mm

ambient temperature: 24.3°C; liquid temperature: 22.6°C

Date/Time: 18.12.2014 17:32:10

FCC GSM850 body worn

DUT: Microsoft; Type: RM-1077; Serial: SAR 1

Communication System: UID 0, GSM/GPRS 2TS (0); Communication System Band: GSM 850; Frequency: 848.8 MHz; Communication System PAR: 6.021 dB; PMF: 2.00009

Medium parameters used: $f = 849$ MHz; $\sigma = 1.011$ S/m; $\epsilon_r = 54.302$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(6.14, 6.14, 6.14); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL835/Rear High 15mm/Area Scan (81x141x1):

Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.885 W/kg

MSL835/Rear High 15mm/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 29.751 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.636 W/kg

Maximum value of SAR (measured) = 0.876 W/kg

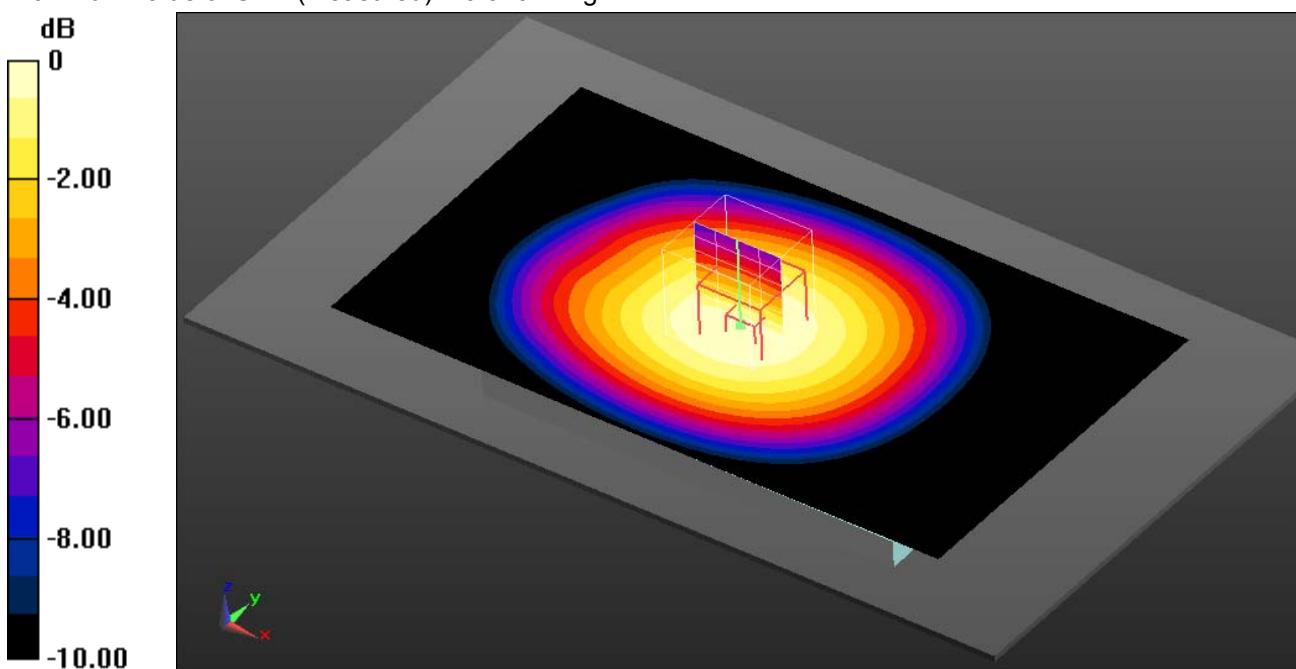

0 dB = 0.876 W/kg = -0.57 dBW/kg

Additional information:

position or distance of DUT to SAM: 15mm

ambient temperature: 24.3°C; liquid temperature: 22.6°C

Annex B.2: GSM 1900MHz

Date/Time: 15.12.2014 13:31:38

IEEE1528-GSM1900 head

DUT: Microsoft; Type: RM-1077; Serial: SAR 3

Communication System: UID 0, GSM/GPRS 2TS (0); Communication System Band: GSM 1900; Frequency: 1880 MHz; Communication System PAR: 6.021 dB; PMF: 2.00009

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 40.709$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.94, 4.94, 4.94); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY5 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left-Hand-Side HSL/Touch Position - Middle - worst case/Area Scan

(81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.01 W/kg

Left-Hand-Side HSL/Touch Position - Middle - worst case/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 25.802 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.887 W/kg; SAR(10 g) = 0.563 W/kg

Maximum value of SAR (measured) = 0.954 W/kg

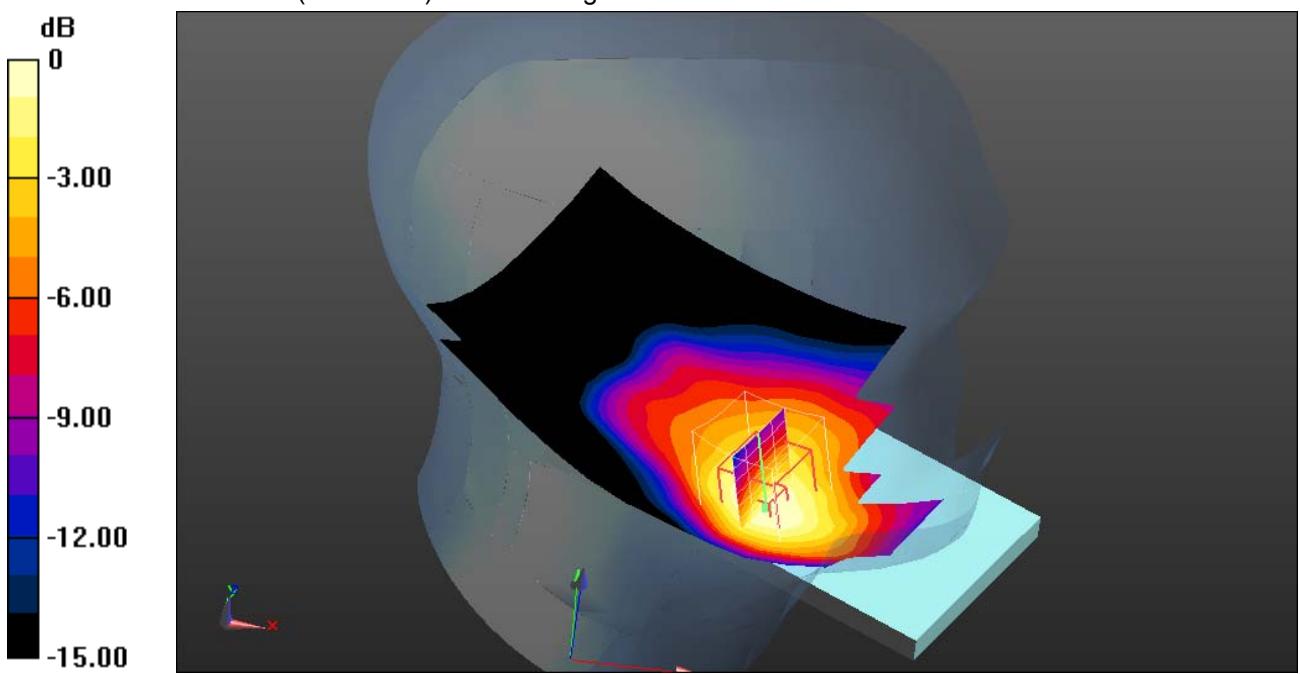

Additional information:

ambient temperature: 23.4°C; liquid temperature: 21.7°C

Date/Time: 18.12.2014 20:51:53

FCC GSM1900 hotspot**DUT: Microsoft; Type: RM-1077; Serial: SAR 3**

Communication System: UID 0, GSM/GPRS 2TS (0); Communication System Band: GSM 1900; Frequency: 1909.8 MHz; Communication System PAR: 6.021 dB; PMF: 2.00009

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 53.36$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.7, 4.7, 4.7); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900-10mm/Rear High/Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.983 W/kg


MSL1900-10mm/Rear High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 22.441 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.799 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 0.874 W/kg

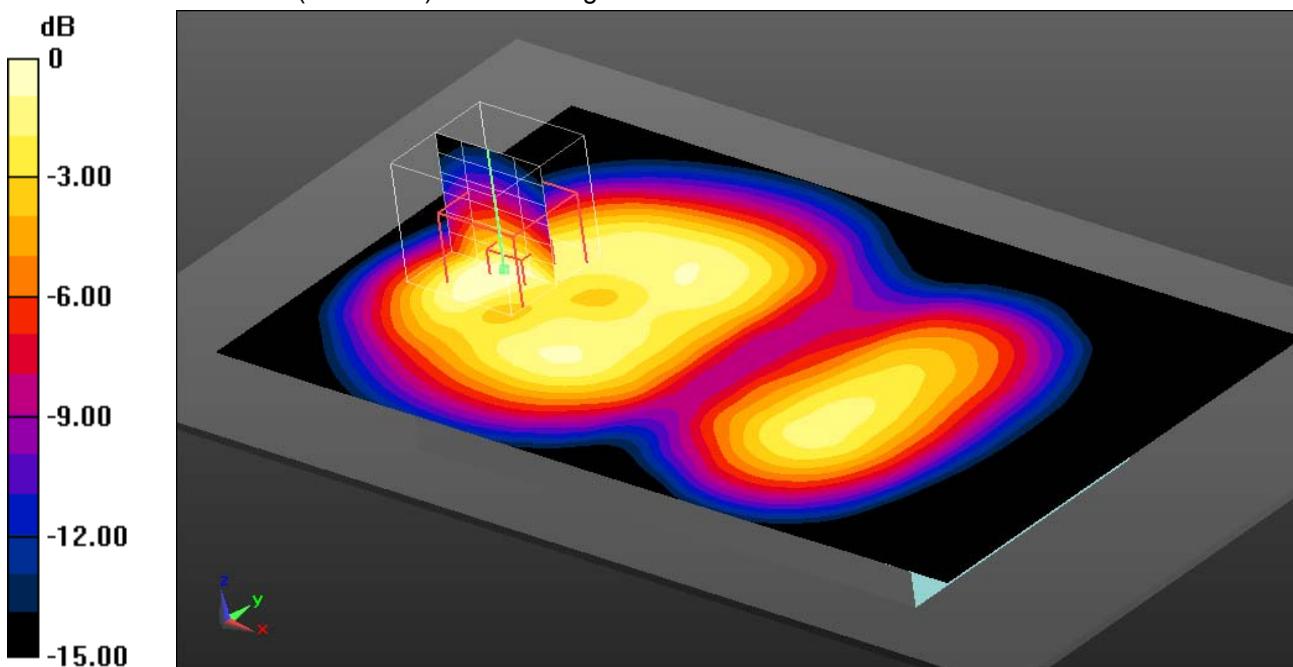

0 dB = 0.874 W/kg = -0.58 dBW/kg

Additional information:

position or distance of DUT to SAM: 10 mm

ambient temperature: 23.8°C; liquid temperature: 22.2°C

Date/Time: 18.12.2014 22:04:49

FCC GSM1900 body worn**DUT: Microsoft; Type: RM-1077; Serial: SAR 3**

Communication System: UID 0, GSM/GPRS 2TS (0); Communication System Band: GSM 1900; Frequency: 1909.8 MHz; Communication System PAR: 6.021 dB; PMF: 2.00009

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.513$ S/m; $\epsilon_r = 53.36$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.7, 4.7, 4.7); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900/Front High 15mm/Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.540 W/kg


MSL1900/Front High 15mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 18.495 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.725 W/kg

SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 0.525 W/kg

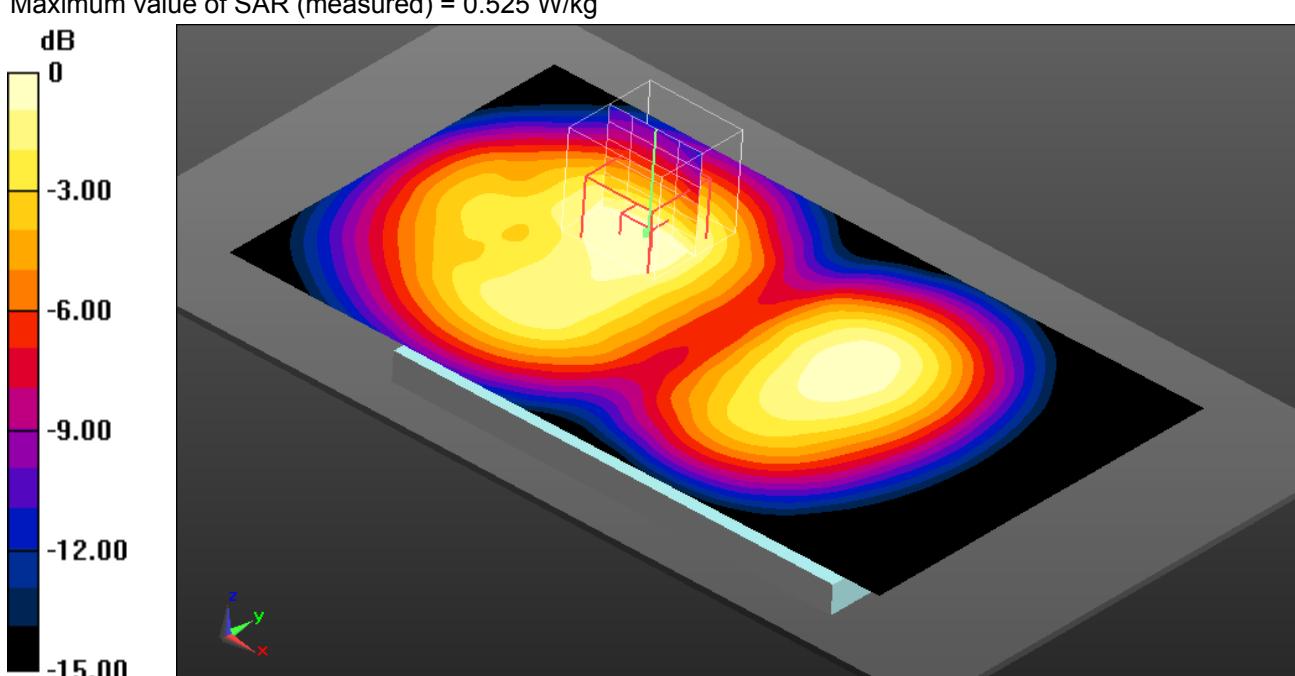

0 dB = 0.525 W/kg = -2.80 dBW/kg

Additional information:

position or distance of DUT to SAM: 15 mm

ambient temperature: 23.8°C; liquid temperature: 22.2°C

Annex B.3: UMTS FDD II

Date/Time: 15.12.2014 14:14:26

IEEE1528-UMTS FDD II head**DUT: Microsoft; Type: RM-1077; Serial: SAR 3**

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 40.519$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.94, 4.94, 4.94); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY5 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left-Hand-Side HSL/Touch Position - Hi/Area Scan (81x141x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.966 W/kg

Left-Hand-Side HSL/Touch Position - Hi/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 24.968 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.853 W/kg; SAR(10 g) = 0.539 W/kg

Maximum value of SAR (measured) = 0.916 W/kg

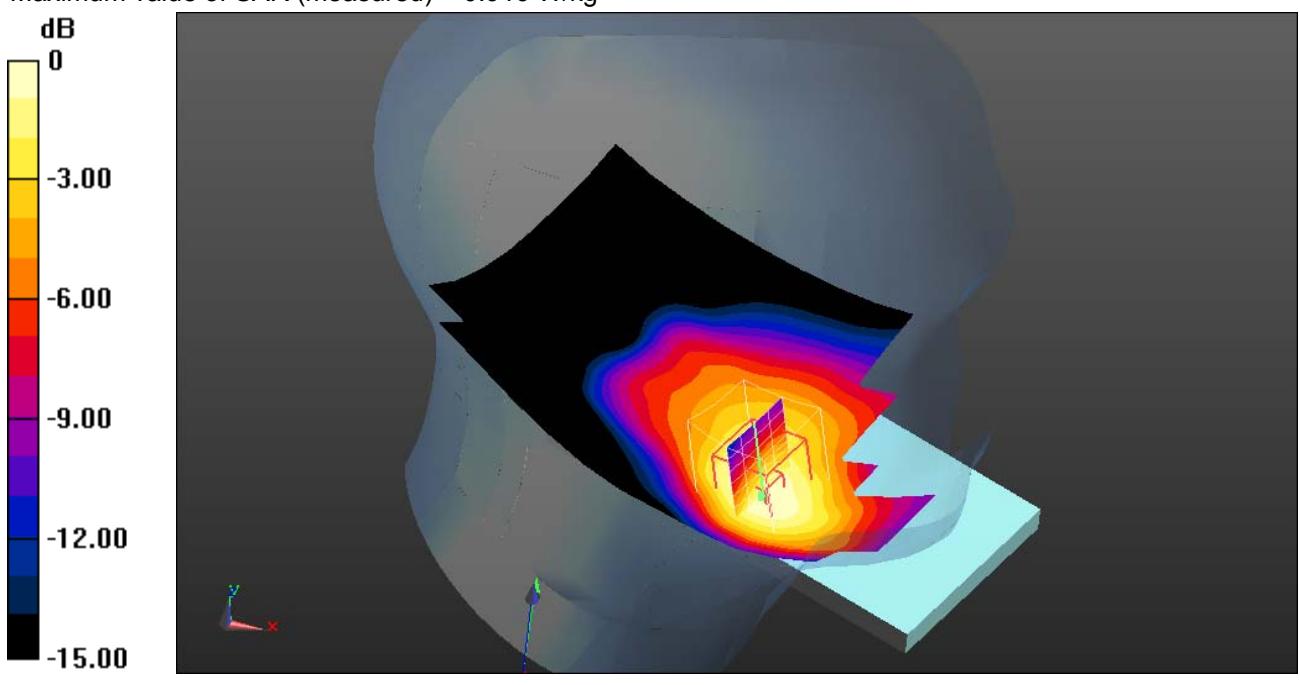**Additional information:**

ambient temperature: 23.4°C; liquid temperature: 21.7°C

Date/Time: 19.12.2014 12:52:51

FCC UMTS FDDII hotspot**DUT: Microsoft; Type: RM-1077; Serial: SAR 3**

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.363$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.7, 4.7, 4.7); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900-10mm/Front High/Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.793 W/kg


MSL1900-10mm/Front High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 21.933 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.458 W/kg

Maximum value of SAR (measured) = 0.742 W/kg

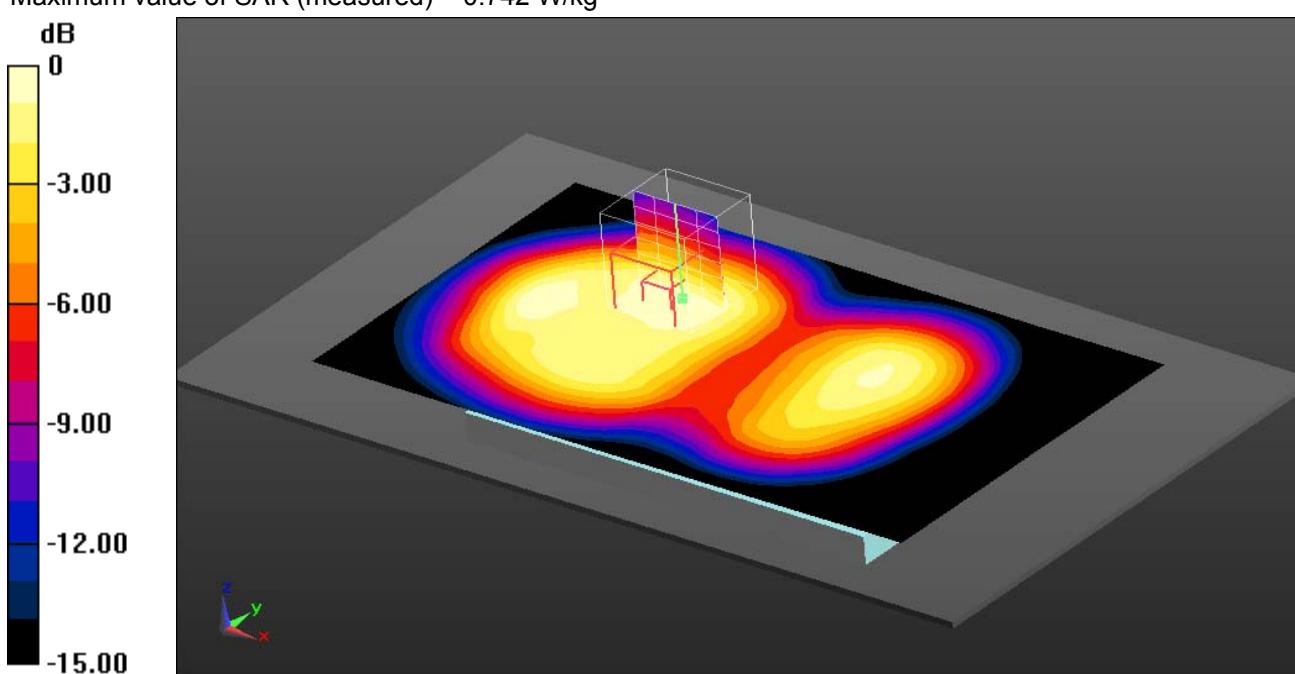

0 dB = 0.742 W/kg = -1.30 dBW/kg

Additional information:

position or distance of DUT to SAM: 10 mm

ambient temperature: 23.8°C; liquid temperature: 22.2°C

Date/Time: 19.12.2014 12:40:25

FCC UMTS FDD II body worn**DUT: Microsoft; Type: RM-1077; Serial: SAR 3**

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD II; Frequency: 1907.6 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.363$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.7, 4.7, 4.7); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL1900/Front High 15mm/Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.515 W/kg


MSL1900/Front High 15mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 17.799 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.683 W/kg

SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.298 W/kg

Maximum value of SAR (measured) = 0.493 W/kg

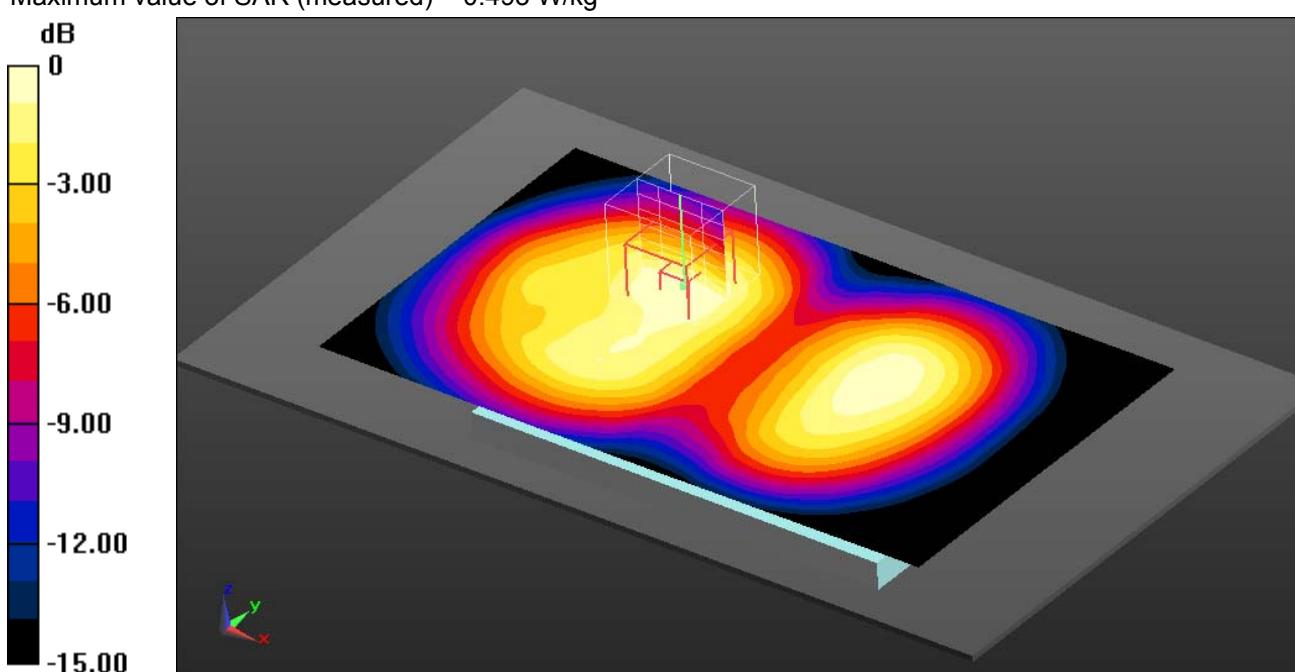

0 dB = 0.493 W/kg = -3.07 dBW/kg

Additional information:

position or distance of DUT to SAM: 15 mm

ambient temperature: 23.8°C; liquid temperature: 22.2°C

Annex B.4: UMTS FDD V

Date/Time: 10.12.2014 14:42:21

IEEE1528-UMTS FDD V head**DUT: Microsoft; Type: RM-1077; Serial: SAR 1**

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD V; Frequency: 846.6 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.419$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(6.15, 6.15, 6.15); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY5 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left-Hand-Side HSL/Touch Position - Hi/Area Scan (81x141x1): Interpolated grid:

dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.718 W/kg

Left-Hand-Side HSL/Touch Position - Hi/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 27.694 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.830 W/kg

SAR(1 g) = 0.692 W/kg; SAR(10 g) = 0.533 W/kg

Maximum value of SAR (measured) = 0.731 W/kg

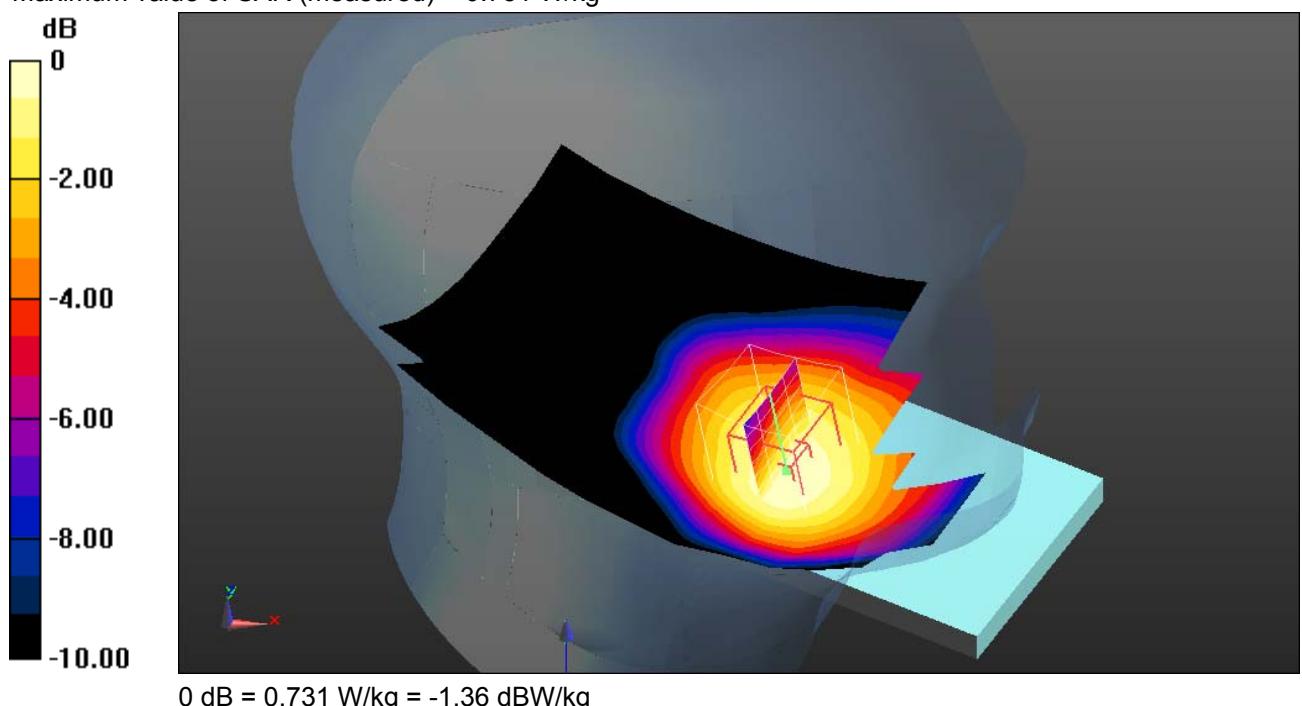**Additional information:**

ambient temperature: 22.7°C; liquid temperature: 21.3°C

Date/Time: 18.12.2014 14:00:34

FCC UMTS FDDV hotspot**DUT: Microsoft; Type: RM-1077; Serial: SAR 1**

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD V; Frequency: 846.6 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 847$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 54.327$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(6.14, 6.14, 6.14); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL835-10mm/Rear High worst case/Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.931 W/kg


MSL835-10mm/Rear High worst case/Zoom Scan (6x6x7)/Cube 0: Measurementgrid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 30.159 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.870 W/kg; SAR(10 g) = 0.669 W/kg

Maximum value of SAR (measured) = 0.911 W/kg

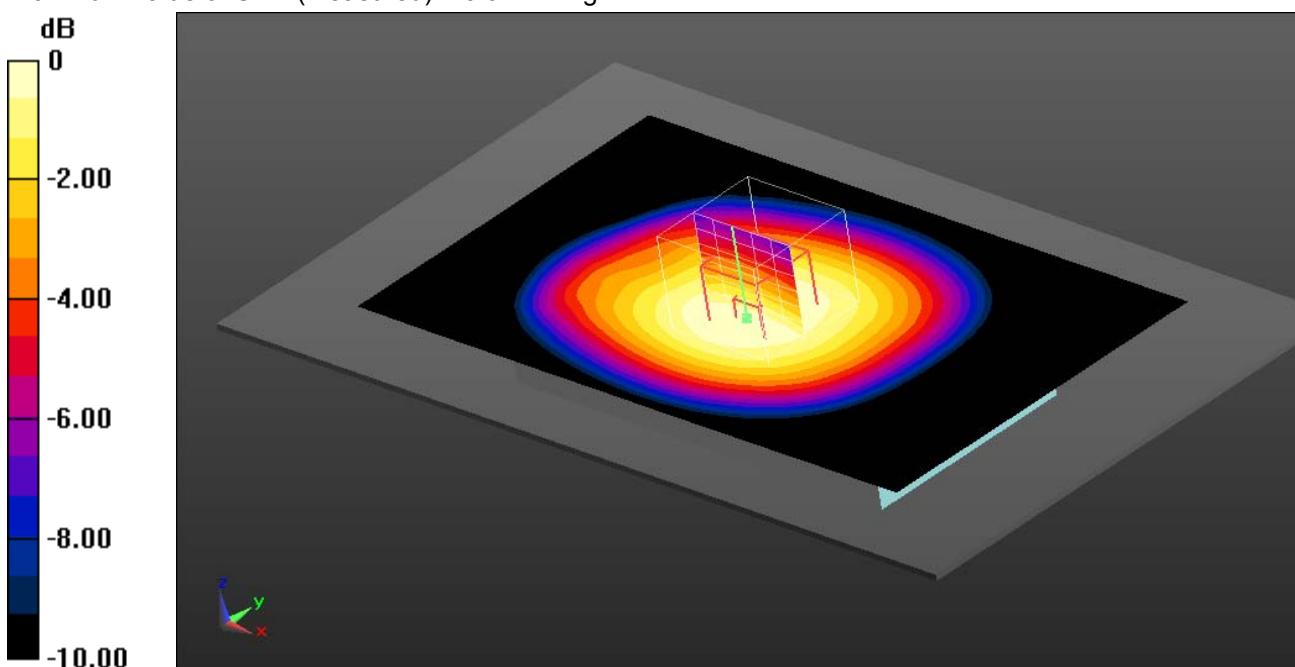

0 dB = 0.911 W/kg = -0.40 dBW/kg

Additional information:

position or distance of DUT to SAM: 10 mm

ambient temperature: 23.8°C; liquid temperature: 22.2°C

Date/Time: 18.12.2014 11:29:03

FCC UMTS FDD V body worn**DUT: Microsoft; Type: RM-1077; Serial: SAR 1**

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD V; Frequency: 836.4 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.999$ S/m; $\epsilon_r = 54.443$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(6.14, 6.14, 6.14); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL835/Rear Middle 15mm/Area Scan (81x141x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.682 W/kg


MSL835/Rear Middle 15mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5$ mm, $dy=7.5$ mm, $dz=5$ mm

Reference Value = 26.326 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.783 W/kg

SAR(1 g) = 0.639 W/kg; SAR(10 g) = 0.487 W/kg

Maximum value of SAR (measured) = 0.668 W/kg

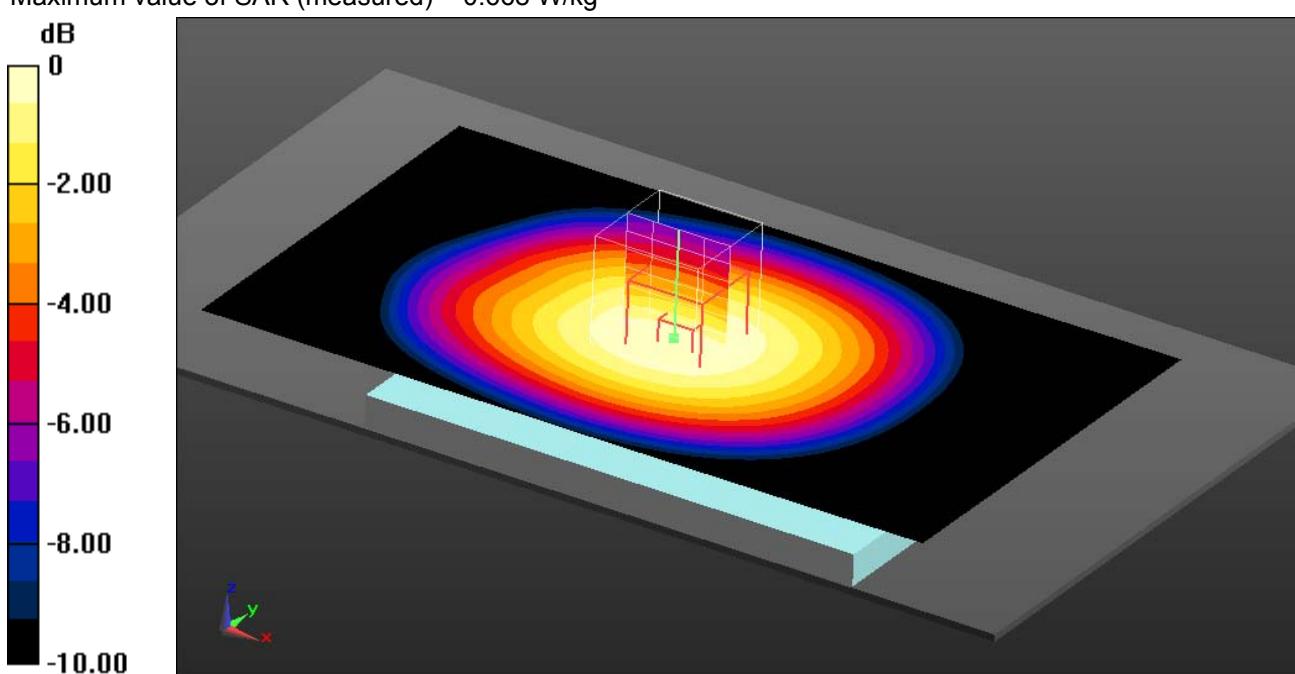

0 dB = 0.668 W/kg = -1.75 dBW/kg

Additional information:

position or distance of DUT to SAM: 15 mm

ambient temperature: 23.8°C; liquid temperature: 22.2°C

Date/Time: 18.12.2014 11:51:32

FCC UMTS FDD V body worn**DUT: Microsoft; Type: RM-1077; Serial: SAR 1**

Communication System: UID 0, UMTS FDD (0); Communication System Band: UMTS FDD V; Frequency: 846.6 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 847$ MHz; $\sigma = 1.009$ S/m; $\epsilon_r = 54.327$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(6.14, 6.14, 6.14); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL835/Rear High 15mm/Area Scan (81x141x1): Interpolated grid: dx=1.500 mm,

dy=1.500 mm

Maximum value of SAR (interpolated) = 0.696 W/kg


MSL835/Rear High 15mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 26.415 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.648 W/kg; SAR(10 g) = 0.494 W/kg

Maximum value of SAR (measured) = 0.679 W/kg

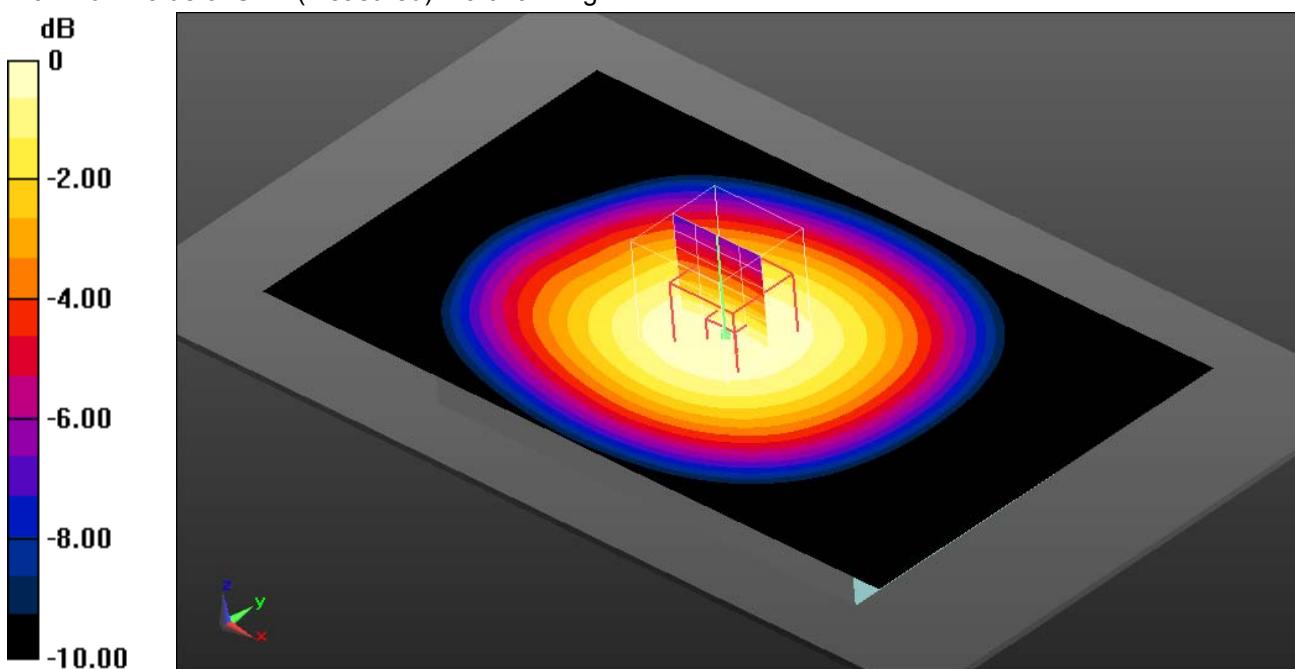**Additional information:**

position or distance of DUT to SAM: 15 mm

ambient temperature: 23.8°C; liquid temperature: 22.2°C

Annex B.5: WLAN 2450MHz

Date/Time: 22.12.2014 11:37:18

IEEE1528-WLAN2450 head**DUT: Microsoft; Type: RM-1077; Serial: SAR 5**

Communication System: UID 0, WLAN 2450 (0); Communication System Band: 2.4 GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.789$ S/m; $\epsilon_r = 38.718$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.4, 4.4, 4.4); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- DASY5 52.8.7(1137); SEMCAD X 14.6.10(7164)

Left-Hand-Side HSL/Touch Position - Middle/Area Scan (121x211x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.702 W/kg


Left-Hand-Side HSL/Touch Position - Middle/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.705 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.632 W/kg; SAR(10 g) = 0.312 W/kg

Maximum value of SAR (measured) = 0.706 W/kg

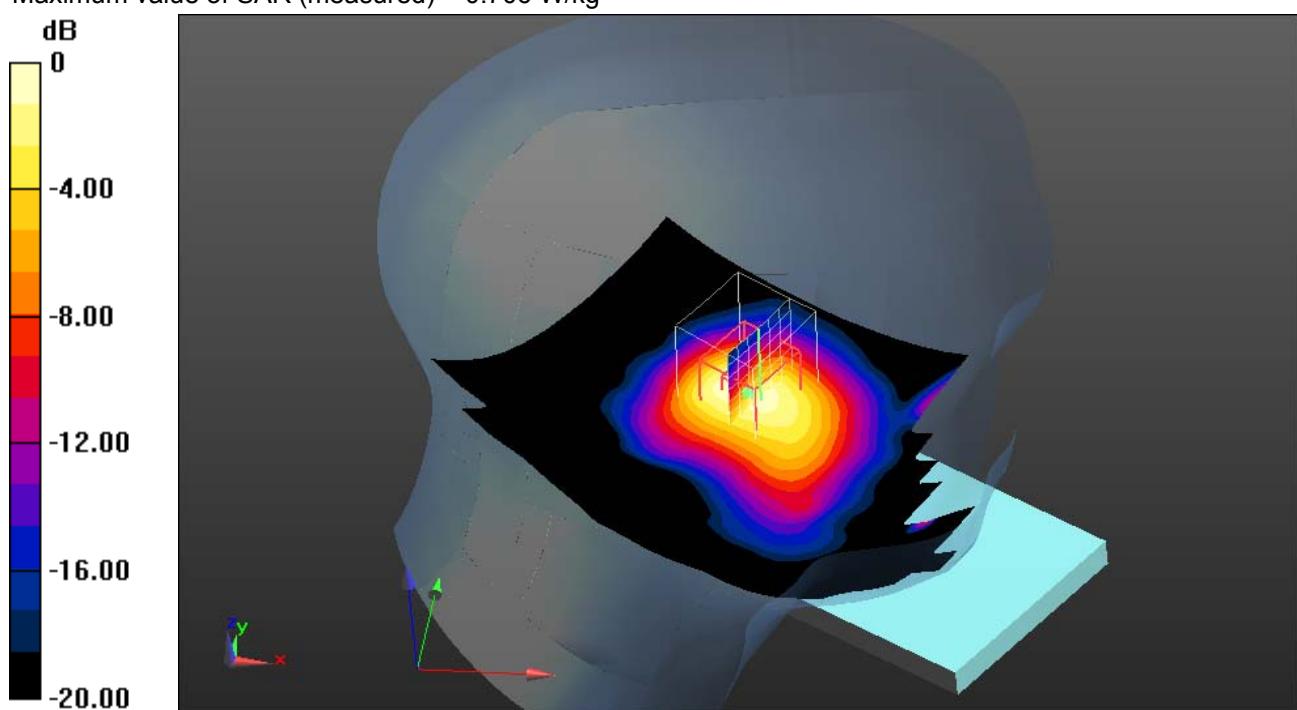**Additional information:**

ambient temperature: 23.4°C; liquid temperature: 20.9°C

Date/Time: 23.12.2014 14:37:25

FCC WLAN2450 hotspot

DUT: Microsoft; Type: RM-1077; Serial: SAR 5

Communication System: UID 0, WLAN 2450 (0); Communication System Band: 2.4 GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.955$ S/m; $\epsilon_r = 51.228$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.3, 4.3, 4.3); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450-10mm/Rear Mid/Area Scan (121x211x1):

Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.356 W/kg

MSL2450-10mm/Rear Mid/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.621 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.150 W/kg

Maximum value of SAR (measured) = 0.350 W/kg

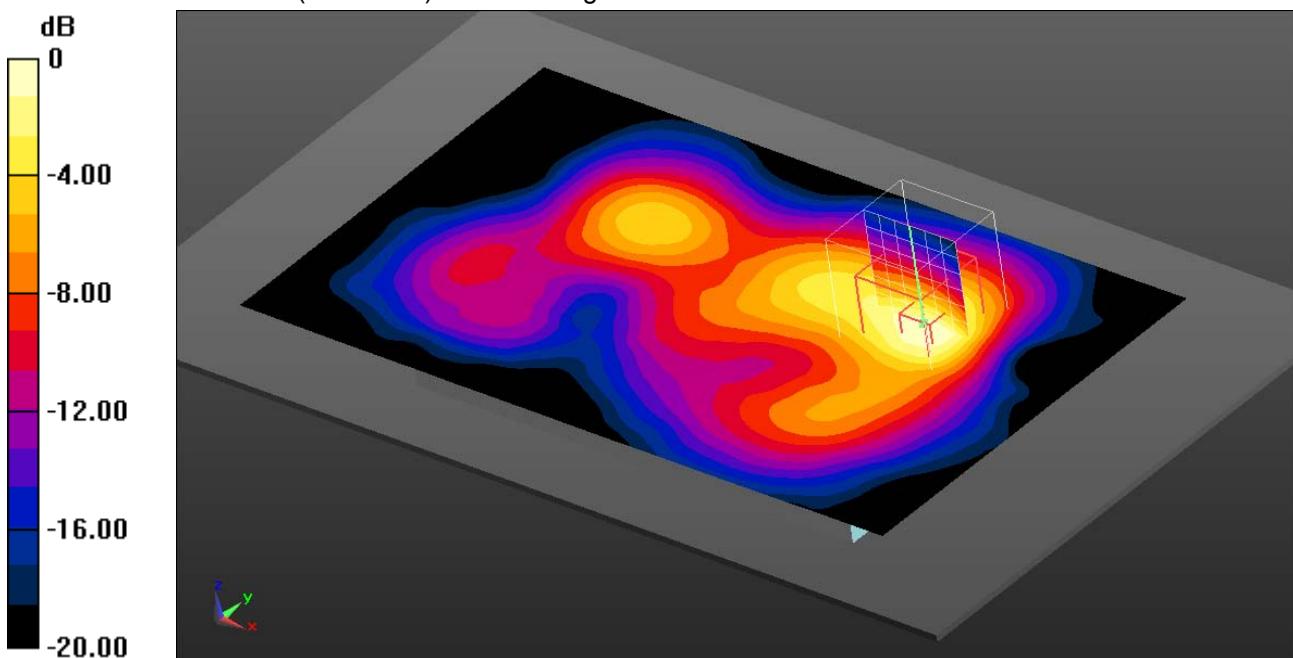

0 dB = 0.350 W/kg = -4.56 dBW/kg

Additional information:

position or distance of DUT to SAM: 10 mm

ambient temperature: 23.3°C; liquid temperature: 21.7°C

Date/Time: 23.12.2014 15:01:02

FCC WLAN2450 body worn**DUT: Microsoft; Type: RM-1077; Serial: SAR 5**

Communication System: UID 0, WLAN 2450 (0); Communication System Band: 2.4 GHz; Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.955$ S/m; $\epsilon_r = 51.228$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5

DASY5 Configuration:

- Probe: ES3DV3 - SN3320; ConvF(4.3, 4.3, 4.3); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

MSL2450/Rear Mid 15 mm/Area Scan (121x211x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.141 W/kg


MSL2450/Rear Mid 15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.562 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.143 W/kg

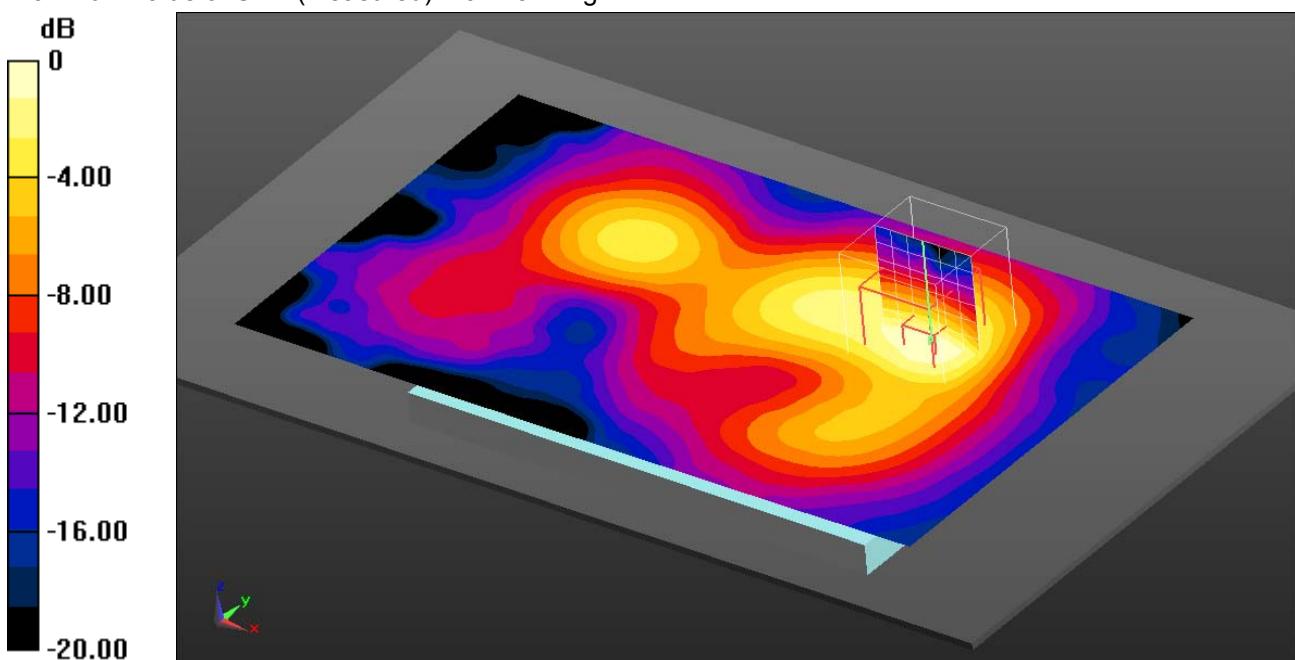

0 dB = 0.143 W/kg = -8.45 dBW/kg

Additional information:

position or distance of DUT to SAM: 15 mm

ambient temperature: 22.9°C; liquid temperature: 21.7°C

Annex B.6: Combined Multi Band Fast SAR

In SEMCAD combining was used same scaling factor for each band as was used for calculating reported/extrapolated SAR results.

Multi-Band Fast SAR-WLAN2450+GSM850 head left cheek

Multi-Band Configurations:

DASY Configuration for Left-Hand-Side HSL/Touch Position - Low/Area Scan:

Date/Time: 22.12.2014 12:03:27

Test Laboratory: Cetecon ICT Services GmbH

File Name: [IEEE1528-WLAN2450 head.da53:0](#)

DUT: Microsoft; Type: RM-1077; Serial: SAR 5

Communication System: UID 0, WLAN 2450 (0); Frequency: 2412 MHz; Duty Cycle: 1:1; PMF: 1

Medium: HSL2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.759$ S/m; $\epsilon_r = 38.82$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: ES3DV3 - SN3320; ConvF(4.4, 4.4, 4.4); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- Measurement SW: DASY52, Version 52.8 (7)

DASY Configuration for Left-Hand-Side HSL/Touch Position - Hi/Area Scan:

Date/Time: 10.12.2014 12:07:43

Test Laboratory: Cetecon ICT Services GmbH

File Name: [IEEE1528-GSM850 head.da53:0](#)

DUT: Microsoft; Type: RM-1077; Serial: SAR 1

Communication System: UID 0, GSM/GPRS 2TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:4.00037; PMF: 2.00009

Medium: HSL900 Medium parameters used: $f = 849$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 41.417$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: ES3DV3 - SN3320; ConvF(6.15, 6.15, 6.15); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: SAM front; Type: QD000P40CC; Serial: TP-1042
- Measurement SW: DASY52, Version 52.8 (7)

Fast SAR of Combined Scans: SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.749 W/kg

Maximum value of SAR (interpolated) = 1.27 W/kg



0 dB = 1.27 W/kg = 1.04 dBW/kg

Multi-Band Fast SAR-WLAN2450+GSM850 hotspot 10mm rear**Multi-Band Configurations:****DASY Configuration for MSL2450-10mm/Rear Mid/Area Scan:**

Date/Time: 23.12.2014 14:37:25

Test Laboratory: Cetecon ICT Services GmbH

File Name: [FCC WLAN2450 hotspot.da52:0](#)**DUT: Microsoft; Type: RM-1077; Serial: SAR 5**

Communication System: UID 0, WLAN 2450 (0); Frequency: 2437 MHz; Duty Cycle: 1:1; PMF: 1

Medium: MSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.955$ S/m; $\epsilon_r = 51.228$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: ES3DV3 - SN3320; ConvF(4.3, 4.3, 4.3); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- Measurement SW: DASY52, Version 52.8 (7)

DASY Configuration for MSL835-10mm/Rear High/Area Scan:

Date/Time: 18.12.2014 16:49:18

Test Laboratory: Cetecon ICT Services GmbH

File Name: [FCC GSM850 hotspot.da52:0](#)**DUT: Microsoft; Type: RM-1077; Serial: SAR 1**

Communication System: UID 0, GSM/GPRS 2TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:4.000037; PMF: 2.00009

Medium: MSL835 Medium parameters used: $f = 849$ MHz; $\sigma = 1.011$ S/m; $\epsilon_r = 54.302$; $\rho = 1000$ kg/m³



Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: ES3DV3 - SN3320; ConvF(6.14, 6.14, 6.14); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- Measurement SW: DASY52, Version 52.8 (7)

Fast SAR of Combined Scans: SAR(1 g) = 1.25 W/kg; SAR(10 g) = 0.874 W/kg

Maximum value of SAR (interpolated) = 1.32 W/kg

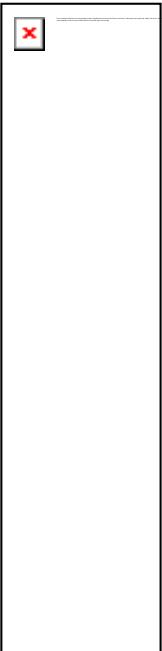

0 dB = 1.32 W/kg = 1.21 dBW/kg

Multi-Band Fast SAR-WLAN2450+GSM850 body worn 15mm rear**Multi-Band Configurations:****DASY Configuration for MSL2450/Rear Mid 15 mm/Area Scan:**

Date/Time: 23.12.2014 15:01:02

Test Laboratory: Cetecon ICT Services GmbH

File Name: [FCC WLAN2450 body worn.da52:0](#)**DUT: Microsoft; Type: RM-1077; Serial: SAR 5**

Communication System: UID 0, WLAN 2450 (0); Frequency: 2437 MHz; Duty Cycle: 1:1; PMF: 1

Medium: MSL2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.955$ S/m; $\epsilon_r = 51.228$; $\rho = 1000$ kg/m³

Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: ES3DV3 - SN3320; ConvF(4.3, 4.3, 4.3); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- Measurement SW: DASY52, Version 52.8 (7)

DASY Configuration for MSL835/Rear High 15mm/Area Scan:

Date/Time: 18.12.2014 17:32:10

Test Laboratory: Cetecon ICT Services GmbH

File Name: [FCC GSM850 body worn.da52:0](#)**DUT: Microsoft; Type: RM-1077; Serial: SAR 1**

Communication System: UID 0, GSM/GPRS 2TS (0); Frequency: 848.8 MHz; Duty Cycle: 1:4.000037; PMF: 2.00009

Medium: MSL835 Medium parameters used: $f = 849$ MHz; $\sigma = 1.011$ S/m; $\epsilon_r = 54.302$; $\rho = 1000$ kg/m³


Phantom section: Center Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

- Probe: ES3DV3 - SN3320; ConvF(6.14, 6.14, 6.14); Calibrated: 09.05.2014;
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used))
- Electronics: DAE3 Sn477; Calibrated: 14.05.2014
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1154
- Measurement SW: DASY52, Version 52.8 (7)

Fast SAR of Combined Scans: SAR(1 g) = 0.997 W/kg; SAR(10 g) = 0.698 W/kg

Maximum value of SAR (interpolated) = 1.05 W/kg

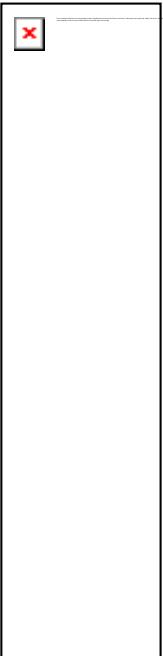

0 dB = 1.05 W/kg = 0.21 dBW/kg

Annex B.7: Liquid depth

Photo 1: Liquid depth 850 MHz head simulating liquid

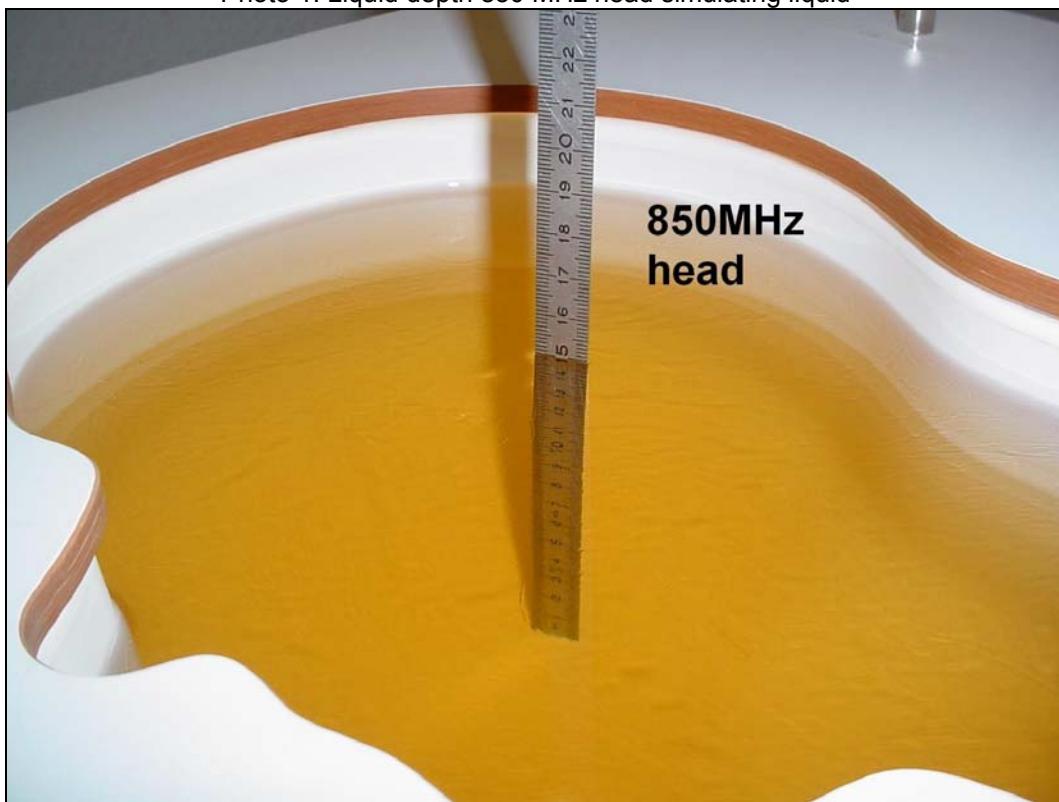


Photo 2: Liquid depth 850 MHz body simulating liquid



Photo 3: Liquid depth 1900MHz head simulating liquid

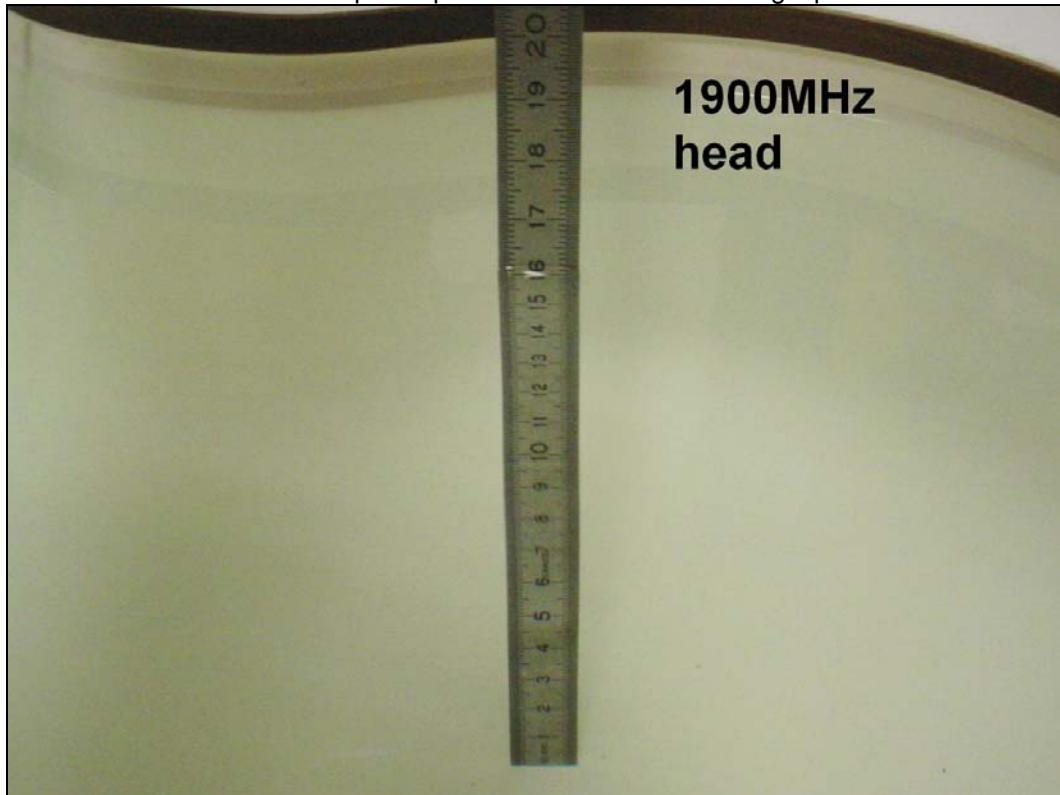


Photo 4: Liquid depth 1900 MHz body simulating liquid



Photo 5: Liquid depth 2450MHz head simulating liquid



Photo 6: Liquid depth 2450 MHz body simulating liquid



Annex C: Photo documentation

Photo documentation is described in the additional document:

Appendix to test report no. 1-7605/14-01-02-B Photo documentation

Annex D: Calibration parameters

Calibration parameters are described in the additional document:

Appendix to test report no. 1-7605/14-01-02-B Calibration data, Phantom certificate and detail information of the DASY5 System

Annex E: Document History

Version	Applied Changes	Date of Release
	Initial Release	2015-01-07
-A	Tables in chapter 4.1, 4.2, 4.3 were corrected	2015-01-14
-B	Inserted probe ES3DV3 SN: 3320 in the table 11 in chapter 6.1.13 System check	2015-02-19

Annex F: Further Information

Glossary

BW	-	Bandwidth
DTS	-	Distributed Transmission System
DUT	-	Device under Test
EUT	-	Equipment under Test
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
LTE	-	Long Term Evolution
N/A	-	not applicable
PCE	-	Personal Consumption Expenditure
OET	-	Office of Engineering and Technology
RB	-	resource block(s)
SAR	-	Specific Absorption Rate
S/N	-	Serial Number
SPLSR _i	-	SAR-to-(peak-locations spacing) ratio
SW	-	Software
UNII	-	Unlicensed National Information Infrastructure