

FCC Part 22/24 Compliance Test Report

Test Report no.:	Cph_FCC_0643_03.doc	Date of Report:	12-01-2007
Number of pages:	17	Customer's Contact person:	Ari Havela
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation P.O. Box 86 Joensuuankatu 7 FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 44277
FCC listing no.:	99059		
IC recognition no.:	4820 and 4820-1		
Tested devices/ accessories:	Phone; RM-216 (HW: 0400), Battery; BL-4C, AC Charger; AC-3E, Headset; HS-23		
FCC ID:	PYARM-216V	IC:	661V-RM216V
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Parts 22 and 24, TIA-603-B-2002 and IC standards RSS-GEN, RSS-132 and RSS-133. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Allan F. Henriksen, Engineer

1. Summary for FCC Part 22/24 Compliance Test Report

Date of receipt	16-10-2006
Testing completed	03-11-2006
The customer's contact person	Ari Havela
Test Plan referred to	T:\Projects\RM-216\TestPlan_RS\RM-216_RS_test_plan.xls
Notes	None
Document name	T:\Projects\RM-216\EMC\Results\FCC\Cph_FCC_0643_03.doc

1.1. EUT and Accessory Information

The EUT is a 4-band (GSM850/900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-216	004400/92/170560/2	0400	-	Vp 02.00	27807
Phone	RM-216	004400/92/170550/3	0400	-	Vp 02.00	29089
Battery	BL-4C	0670386417535N073B11156780	-	-	-	27805
Battery	BL-4C	0670386417535N073B11157634	-	-	-	29091
Headset	HS-23	FM2550741Q	-	-	-	28104
Headset	HS-23	350853629102	-	-	-	27810
Ac Charger	AC-3E	4090496105171006659; 0675370	-	-	-	27898
AC-Charger	AC-3E	1103336192171308325;0675370	-	-	-	29090

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in RSS-GEN or RSS-132	Name of the test	Result
§2.1046(a), 22.913(a)	4.6, 4.4	Conducted RF output power	NP
§22.913(a)	4.6, 4.4	Radiated RF output power	NP
§2.1049(h)	4.4.1	99 % occupied bandwidth	Passed
§22.917(a)	4.7, 4.5	Band edge compliance	NP
§22.917(a), §2.1051	4.7, 4.5	Spurious emissions at antenna terminals	NP
§22.917(a), §2.1053	4.7, 4.5	Spurious radiated emissions	Passed
§2.1055(a)	4.5, 4.3	Frequency stability, temperature variation	Passed
§2.1055(d)	4.5, 4.3	Frequency stability, voltage variation	Passed

GSM 1900:

Section in CFR 47	Section in RSS-133	Name of the test	Result
§2.1046(a)	6.2	Conducted RF output power	NP
§24.232(b)	6.2	Radiated RF output power	NP
§2.1049(h)	5.6	99 % occupied bandwidth	Passed
§24.238(a)	6.3	Band edge compliance	NP
§24.238(a), §2.1051	6.3	Spurious emissions at antenna terminals	NP
§24.238(a), §2.1053	6.3	Spurious radiated emissions	Passed
§2.1055(a)	7	Frequency stability, temperature variation	Passed
§2.1055(d)	7	Frequency stability, voltage variation	Passed

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Copenhagen Laboratory.


CONTENTS

1. Summary for FCC Part 22/24 Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.4.1, RSS-133 5.6)	5
2.1. Test setup	5
2.2. Test method and limit	5
2.3. GSM 850 Test results	6
2.4. GSM 1900 Test results	7
3. Spurious radiated emissions (FCC §22.917(a), §24.238(a), §2.1053, RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)	8
3.1. Test setup	8
3.2. Test method and limit	8
3.3. GSM 850 Test results	9
3.4. GSM 1900 Test results	10
4. Frequency stability, temperature variation (FCC §2.1055(a), §2.1055(a), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)	12
4.1. Test setup	12
4.2. Test method and limit	12
4.3. GSM 850 Test results	13
4.4. GSM 1900 Test results	13
5. Frequency stability, voltage variation (FCC §2.1055(d), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)	14
5.1. Test setup	14
5.2. Test method and limit	14
5.3. GSM 850 Test results	15
5.4. GSM 1900 Test results	15
6. Test Equipment	16
6.1. Conducted measurements	16
6.2. Radiated measurements	16

2. 99 % occupied bandwidth (FCC §2.1049(h), RSS-GEN 4.4.1, RSS-133 5.6)

EUT with DUT number	RM-216 dut 27107, BL-4C dut 27105
Accessories with DUT numbers	HS-23 dut 28104, AC-3E dut 27898
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	23.6 / 38.0 1011.3
Date of measurements	25-10-2006
Measured by	Jan Engelbrechtsen

2.1. Test setup

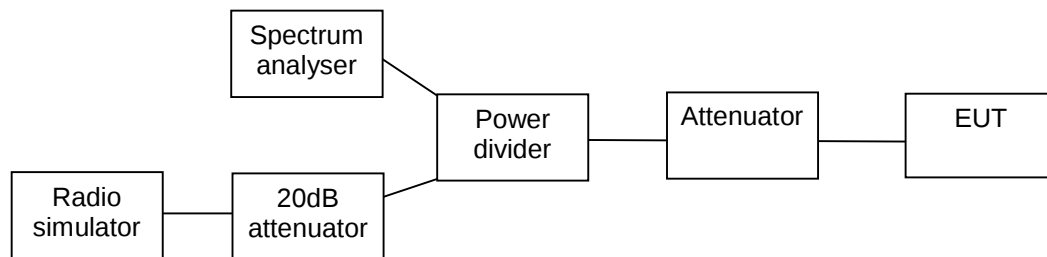


2.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-GEN and RSS-133.


2.3. GSM 850 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	248
EGPRS	238

GSM mode, channel 190 / 836.6 MHz

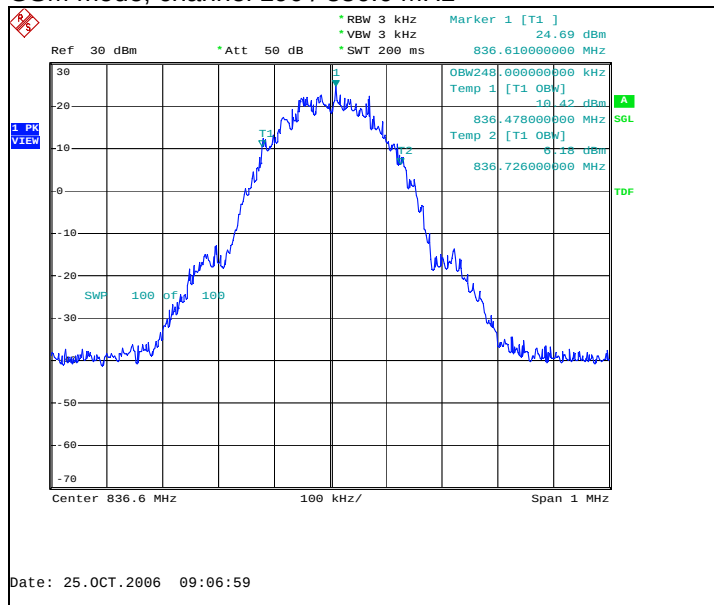

EGPRS mode, channel 190 / 836.6 MHz

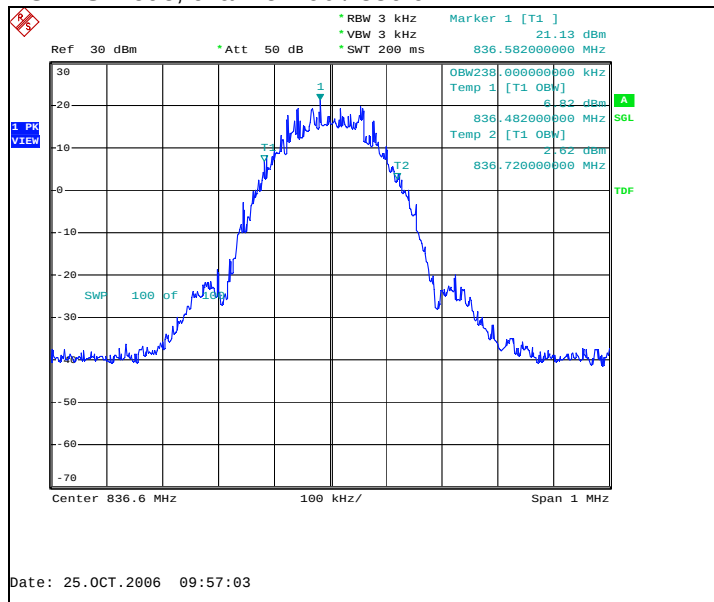


her


2.4. GSM 1900 Test results

Operation mode (TX on)	99% occupied bandwidth [kHz]
GSM	246
EGPRS	248

GSM mode, channel 661 / 1880.0 MHz

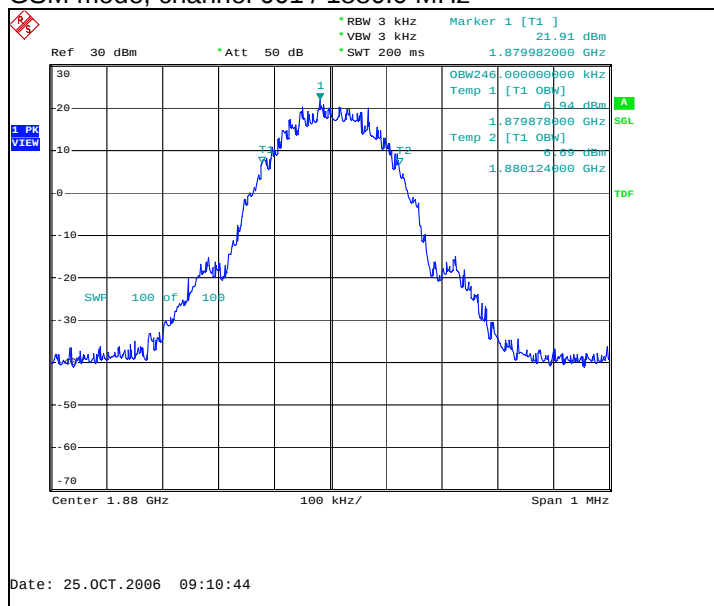

EGPRS mode, channel 661 / 1880.0 MHz

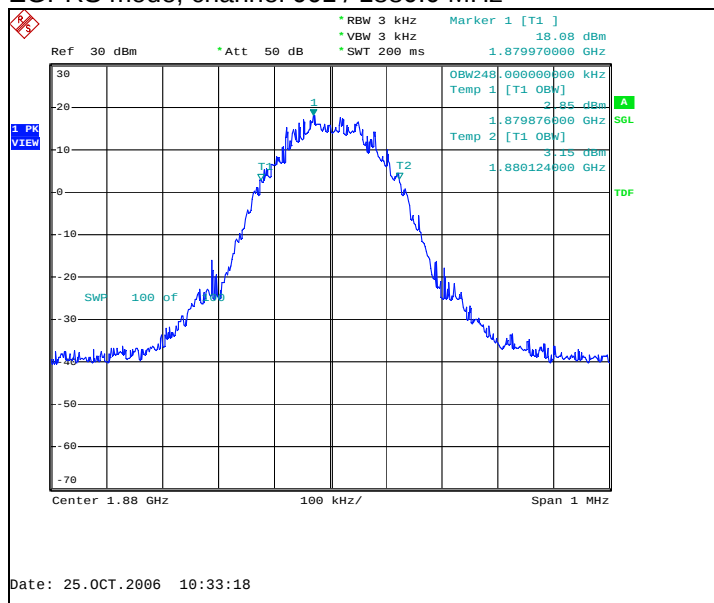


3. Spurious radiated emissions

(FCC §22.917(a), §24.238(a), §2.1053, RSS-GEN 4.7, RSS-132 4.5, RSS-133 6.3)

EUT with DUT number	RM-216 Dut#29089
Accessories with DUT numbers	BL-4C Dut#29091, AC-3E Dut#29090, HS-23 Dut#27810
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	20 / 45 / 1026
Date of measurements	03-11-2006
Measured by	Christian Andersen

3.1. Test setup

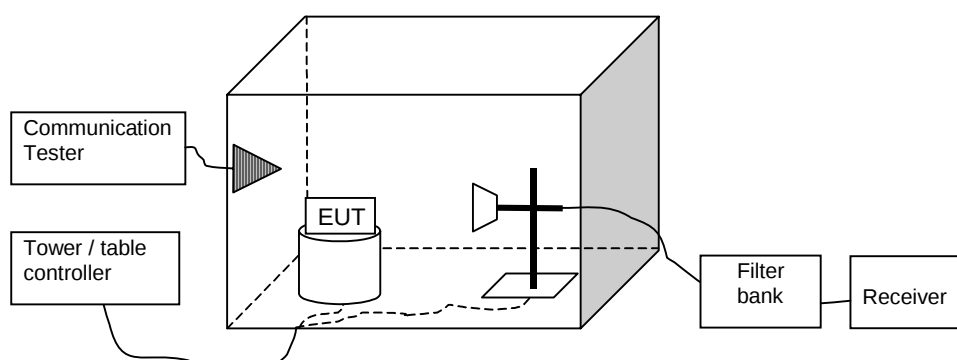

3.2. Test method and limit

The measurement is made according to TIA-603-B-2002 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.
The substitution method is used. Substitution values at each frequencies are measured beforehand and saved to the test software.

The substitution corrections are obtained as described below:

$$A_{SUBST} = P_{SUBST_TX} - P_{SUBST_RX} - L_{SUBST_CABLES} + G_{SUBST_TX_ANT}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain. P_{SUBST_TX} is signal generator level, P_{SUBST_RX} is receiver level, L_{SUBST_CABLES} is cable losses including both TX and RX cables and $G_{SUBST_TX_ANT}$ is substitution antenna gain.

The measurement results are obtained as described below:

$$P [dBm] = P_{MEAS} + A_{TOT}$$

Where P_{MEAS} is receiver reading in dBm and A_{TOT} is total correction factor including cable loss, preamplifier gain and substitution correction ($A_{TOT} = L_{CABLES} - G_{PREAMP} + A_{SUBST}$).

Limits for spurious radiated emissions measurements

Operation band	Frequency range [MHz]	Limit [dBm]
GSM 850 / WCDMA 850	30 - 8500	-13
GSM 1900 / WCDMA 1700 / WCDMA 1900	30 - 18000	-13

3.3. GSM 850 Test results

3.3.1 Phone flip open

GSM mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1673.143287	-29.20	1.20226	-33.30	4.10	HORIZONTAL	Passed
2501.998998	-53.90	0.00407	-63.00	9.10	HORIZONTAL	Passed
2509.820641	-43.30	0.04677	-52.60	9.30	VERTICAL	Passed
3346.689379	-44.30	0.03715	-47.30	3.00	VERTICAL	Passed

EGPRS mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1673.143287	-34.30	0.37154	-38.40	4.10	HORIZONTAL	Passed
2498.998998	-53.70	0.00427	-62.90	9.20	HORIZONTAL	Passed
2509.820641	-39.90	0.10233	-49.20	9.30	VERTICAL	Passed
3346.189379	-50.40	0.00912	-53.40	3.00	VERTICAL	Passed

3.3.2 Phone flip closed

GSM mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1673.143287	-28.20	1.51356	-32.30	4.10	HORIZONTAL	Passed
2509.820641	-39.60	0.10965	-48.90	9.30	HORIZONTAL	Passed
3346.697395	-49.30	0.01175	-52.30	3.00	VERTICAL	Passed

EGPRS mode, channel 190 / 836.6 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1673.143287	-31.20	0.75858	-35.30	4.10	HORIZONTAL	Passed
2509.820641	-40.20	0.09550	-49.50	9.30	HORIZONTAL	Passed
3346.197395	-55.30	0.00295	-58.30	3.00	VERTICAL	Passed

3.4. GSM 1900 Test results

3.4.1 Phone flip open

GSM mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1929.962926	-22.50	5.62341	-30.80	8.30	VERTICAL	Passed
3760.023046	-31.20	0.75858	-36.80	5.60	HORIZONTAL	Passed
5640.282565	-40.00	0.10000	-48.50	8.50	HORIZONTAL	Passed
5651.310621	-56.30	0.00234	-64.90	8.60	HORIZONTAL	Passed
7520.042084	-44.90	0.03236	-61.40	16.50	HORIZONTAL	Passed
7537.574148	-51.70	0.00676	-68.50	16.80	VERTICAL	Passed

EGPRS mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μW]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
3760.023046	-37.90	0.16218	-43.50	5.60	HORIZONTAL	Passed
5640.282565	-48.20	0.01514	-56.70	8.50	HORIZONTAL	Passed
5652.310621	-55.90	0.00257	-64.50	8.60	HORIZONTAL	Passed
7520.042084	-47.70	0.01698	-64.20	16.50	HORIZONTAL	Passed
7535.074148	-51.00	0.00794	-67.90	16.90	VERTICAL	Passed

3.4.2 Phone flip closed

GSM mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1960.049699	-25.20	3.01995	-33.50	8.30	VERTICAL	Passed
3760.023046	-31.10	0.77625	-36.70	5.60	HORIZONTAL	Passed
5640.282565	-41.60	0.06918	-49.90	8.30	VERTICAL	Passed


EGPRS mode, channel 661 / 1880.0 MHz

Frequency [MHz]	P [dBm]	P [μ W]	P _{MEAS} [dBm]	A _{TOT} [dB]	Polarisation	Result
1960.049699	-22.30	5.88844	-30.60	8.30	VERTICAL	Passed
3760.023046	-38.60	0.13804	-44.20	5.60	HORIZONTAL	Passed
5640.282565	-49.80	0.01047	-58.10	8.30	VERTICAL	Passed

4. Frequency stability, temperature variation (FCC §2.1055(a), §2.1055(a), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)

EUT with DUT number	RM-216 dut 27107, BL-4C dut 27105
Accessories with DUT numbers	HS-23 dut 28104, AC-3E dut 27898
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	23.6 / 38.0 1011.3
Date of measurements	25-10-2006
Measured by	Jan Engelbrechtsen

4.1. Test setup

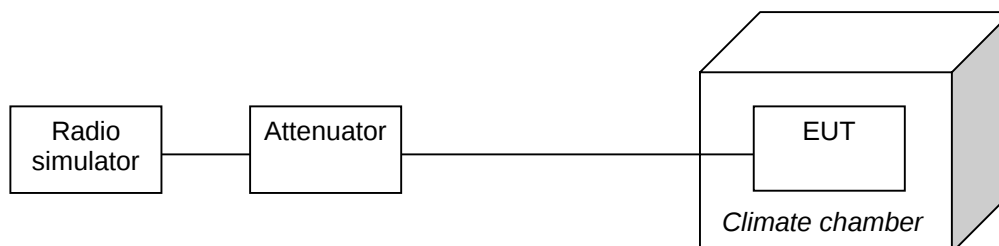

4.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-GEN, RSS-132 and RSS-133 as follows:

- The climate chamber temperature is set to the maximum value and the temperature is allowed to stabilize.
- The EUT is placed in the chamber.
- The EUT is set in idle mode for 15 minutes.
- The EUT is set to transmit.
- The transmit frequency error was measured immediately.
- The steps c - e were repeated for each temperature.

Limits for frequency stability, temperature variation measurements

Frequency deviation [ppm]
± 2.5

4.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-15	-0.0179
40	-20	-0.0239
30	-12	-0.0143
20	-13	-0.0155
10	-14	-0.0167
0	-16	-0.0191
-10	-14	-0.0167
-20	-22	-0.0263
-30	-15	-0.0179

4.4. GSM 1900 Test results


GSM mode, channel 661 / 1880.0 MHz

Temperature [°C]	Deviation [Hz]	Deviation [ppm]
50	-47	-0.0250
40	-49	-0.0261
30	-54	-0.0287
20	-38	-0.0202
10	-38	-0.0202
0	-38	-0.0202
-10	-52	-0.0277
-20	-51	-0.0271
-30	-39	-0.0207

5. Frequency stability, voltage variation (FCC §2.1055(d), RSS-GEN 4.5, RSS-132 4.3, RSS-133 7)

EUT with DUT number	RM-216 dut 27107
Accessories with DUT numbers	HS-23 dut 28104, Dummy Battery
Operation Voltage [V] / [Hz]	Variable DC Power supply
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	23.0 / 41.0 1023.6
Date of measurements	30-10-2006
Measured by	Jan Engelbrechtsen

5.1. Test setup



5.2. Test method and limit

The measurement is made according to FCC rules part 22 and 24 and IC standards RSS-GEN, RSS-132 and RSS-133 as follows:

The EUT battery was replaced with an adjustable power supply. The frequency stability was measured at nominal voltage and at the battery cut-off point.

Limits for frequency stability, voltage variation measurements

Frequency deviation [ppm]
± 2.5

5.3. GSM 850 Test results

GSM mode, channel 190 / 836.6 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.40	-23	-0.0275
Nominal / 4.00	-20	-0.0239

5.4. GSM 1900 Test results

GSM mode, channel 661 / 1880.0 MHz

Voltage level [V]	Deviation [Hz]	Deviation [ppm]
Battery cut-off point / 3.40	-46	-0.0245
Nominal / 4.00	-35	-0.0186

6. Test Equipment

6.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15C, 15B
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	System DC Power Supply	HP6632A	Hewlett Packard	22/24, 15C, 15B
19678	Spectrum Analyzer 26 GHz	FSP	Rohde&Schwarz	22/24, 15C, 15B
16601	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24, 15C, 15B
19625	Vötsch Climatic Chamber	VT4002EMC	Vötsch	22/24, 15C, 15B
13357	Rohde & Schwartz Signal Generator	SMP02	Rohde&Schwarz	22/24, 15C, 15B

6.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18416	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24, 15C, 15B
	Programmable Relay Switching System	-----	Pickering	22/24, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24, 15C, 15B
14020	Power Supply Module Relay Switching System 45W	10-910-002	Pickering	22/24, 15C, 15B
15743	Power Supply Module Relay Switching System 50W	10-910L-001	Pickering	22/24, 15C, 15B
16490	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24, 15C, 15B
	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24, 15C, 15B
	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
18792	Multi Device Controller	2090	ETS-EMCO	22/24, 15C, 15B
14963	RF Preampifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	22/24, 15C, 15B
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	22/24, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
18860	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24, 15C, 15B
19830	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24, 15C, 15B
18773	Shielded Chamber	RFD-100	ETS-Lindgren	22/24, 15C, 15B
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	22/24, 15C, 15B
19151	High Pass Filter 3GHz WHK3.0/18G-10ss	WHJS3000-10SS	Wainwright	22/24, 15C, 15B
13937	Ultra Stable Notch Filter 850MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24, 15C, 15B
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright Instruments	22/24, 15C, 15B
13917	Highpass Filter 1000-3000MHz 50OHM SMA Conn	WHKS1000-10SS	Wainwright Instruments	22/24, 15C, 15B
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	22/24, 15C, 15B
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright	22/24, 15C, 15B
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40- 10SS	Wainwright	22/24, 15C, 15B
19587	BT/WLAN Band Reject Filter	WRCG2400/2483- 2390/2493-35/10SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 4 filter	WRCG1737/1743- 1733/1747-40/6SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 5&6 filter	WRCG832/83/-825/845- 40/5SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 8 filter	WRCG894.6/900.6- 890.6/904.6-40/80SS	Wainwright	22/24, 15C, 15B
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953- 1940/1960-40/6SS	Wainwright	22/24, 15C, 15B
20031	Double Ridged Broadband Horn	BBHA 9120 D	SCHWARZBECK	22/24, 15C, 15B
15190	Infra Red Remote Control Unit	4630	Emco	22/24, 15C, 15B
14993	EMI Test Receiver 9KHz- 2750MHz	ESCS30	Rohde&Schwarz	22/24, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24, 15C, 15B
15105	Attenuator 30dB DC-1000MHz 50 Ohm Nf - Nm	NAT-30	Mini-Circuits	22/24, 15C, 15B
13302	Spectrum Analyzer 9KHz- 12.8GHz	HP8596E	Hewlett Packard	22/24, 15C, 15B
11584	Spectrum analyzer 50Hz- 6,5GHz	HP8561B	Hewlett Packard	22/24, 15C, 15B
13134	Tracking generator	HP85645A	Hewlett Packard	22/24, 15C, 15B
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-----	NMP Cph	22/24, 15C, 15B
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-----	NMP Cph	22/24, 15C, 15B
11487	Network analyzer 300KHz- 3,0GHz	HP8753A	Hewlett Packard	22/24, 15C, 15B
14807	S - Parameter Test Set 300KHz- 6GHz	HP85047A	Hewlett Packard	22/24, 15C, 15B
17277	Multimeter Digital 6 1/2 Digit	AT34401A	Agilent Technologies	22/24, 15C, 15B