

FCC Part 15C Compliance Test Report

Test Report no.:	Cph_FCC_0643_04.doc	Date of Report:	12-01-2007
Number of pages:	23	Customer's Contact person:	Ari Havela
Testing laboratory:	TCC Nokia Copenhagen Laboratory Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934	Customer:	Nokia Corporation P.O. Box 86 Joensuunkatu 7 FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 44277
FCC listing no.:	99059		
IC recognition no.:	4820 and 4820-1		
Tested devices/ accessories:	Phone; RM-216 (HW: 0400), Battery; BL-4C, AC-Charger; AC-3E, Headset; HS-23		
FCC ID:	PYARM-216V	IC:	661V-RM216V
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Allan F. Henriksen, Engineer

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	02-11-2006
Testing completed	02-11-2006
The customer's contact person	Ari Havela
Test Plan referred to	T:\Projects\RM-216\TestPlan_RS\RM-216_RS_test_plan.xls
Notes	None
Document name	T:\Projects\RM-216\EMC\Results\FCC\Cph_FCC_0643_04.doc

1.1. EUT and Accessory Information

The EUT is a 4-band (GSM850/900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-216	004400/92/171228/5	0400	-	Vp 02.00	27813
Phone	RM-216	004400/92/171315/0	0400	-	Vp 02.00	27803
Battery	BL-4C	0670386417535N073B11154785	-	-	-	27812
Battery	BL-4C	0670386417535N073B11156780	-	-	-	27805
AC-Charger	AC-3E	1103336192171308343;0675370	-	-	-	27811
AC-Charger	AC-3E	4090496105171006659; 0675370	-	-	-	27898
Headset	HS-23	350853629102	-	-	-	27808
Headset	HS-23	FM2550741Q	-	-	-	28104

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	Passed
15.247(c)	A8.5	Band edge compliance of RF emissions	NP
15.247(c)	A8.5	Spurious RF conducted emissions	Passed
15.247(c), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC power line conducted emissions	Passed
15.247(a)(1)	A8.1 (1)	20 dB bandwidth	Passed
15.247(a)(1)	A8.1 (2)	Carrier frequency separation	Passed
15.247(a)(1)(iii)	A8.1 (4)	Number of hopping frequencies	Passed
15.247(a)(1)(iii)	A8.1 (4)	Time of occupancy	Passed

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.


The test was not performed by the TCC Nokia Copenhagen Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Spurious radiated emissions test setup	4
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	5
3.1. Test method and limit.....	5
3.2. Bluetooth Test results	6
4. Spurious RF conducted emissions (FCC §15.247(c), RSS-A8.5).....	8
4.1. Test method and limit.....	8
4.2. Bluetooth Test results	9
5. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	11
5.1. Test method and limit.....	11
5.2. Bluetooth Test results	12
6. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))	13
6.1. Test method and limit.....	13
6.2. Bluetooth Test results	14
7. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))	16
7.1. Test method and limit.....	16
7.2. Bluetooth Test results	17
8. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	18
8.1. Test method and limit.....	18
8.2. Bluetooth Test results	19
9. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	20
9.1. Test method and limit.....	20
9.2. Bluetooth test results.....	21
10. Test Equipment	22
10.1. Conducted measurements	22
10.2. Radiated measurements	22

2. Test setups


2.1. Conducted RF test setup

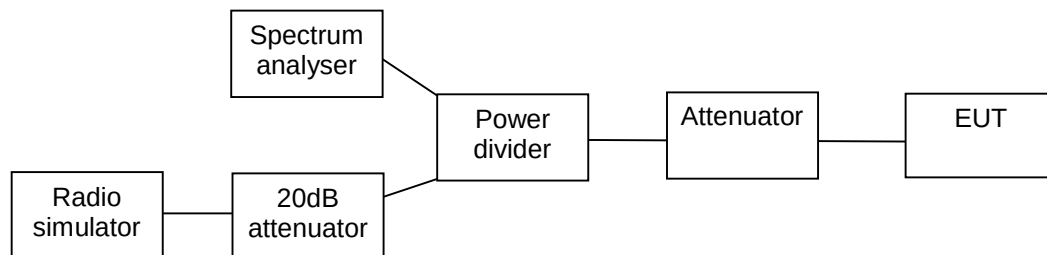

2.2. AC powerline conducted emissions test setup



2.3. Spurious radiated emissions test setup

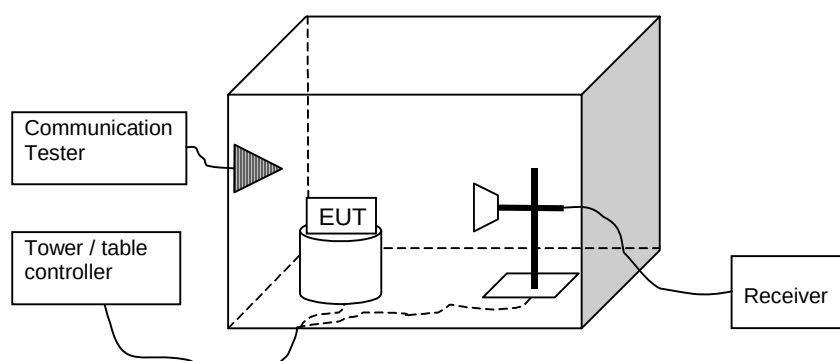

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-216 dut 27803, BL-4C dut 27805
Accessories with DUT numbers	AC-3 dut 27898, HS-23 dut 28104
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	23.5 / 45.5 1025.4
Date of measurements	2-11-2006
Measured by	Jan Engelbrechtsen

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	-0.50	0.891	Passed
40 / 2442	-0.10	0.977	Passed
78 / 2480	0.00	1.000	Passed


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz)

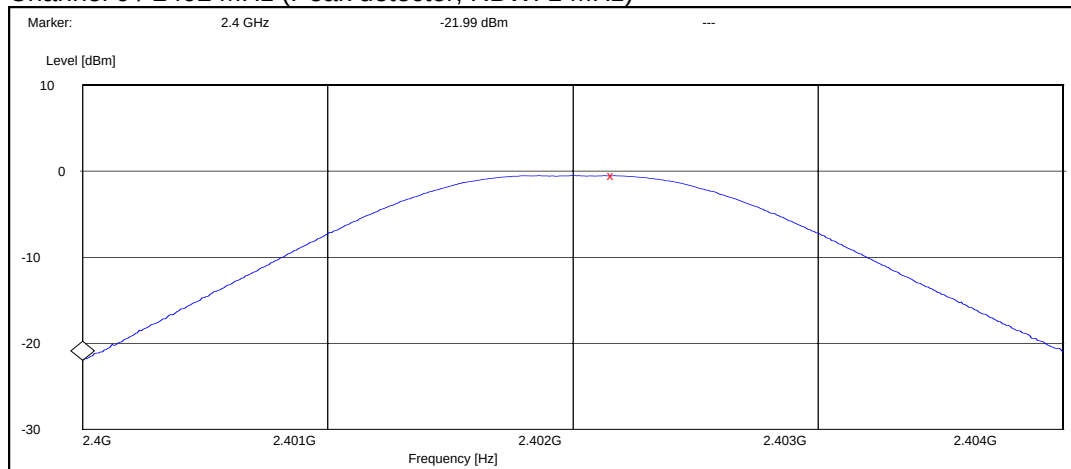

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz)

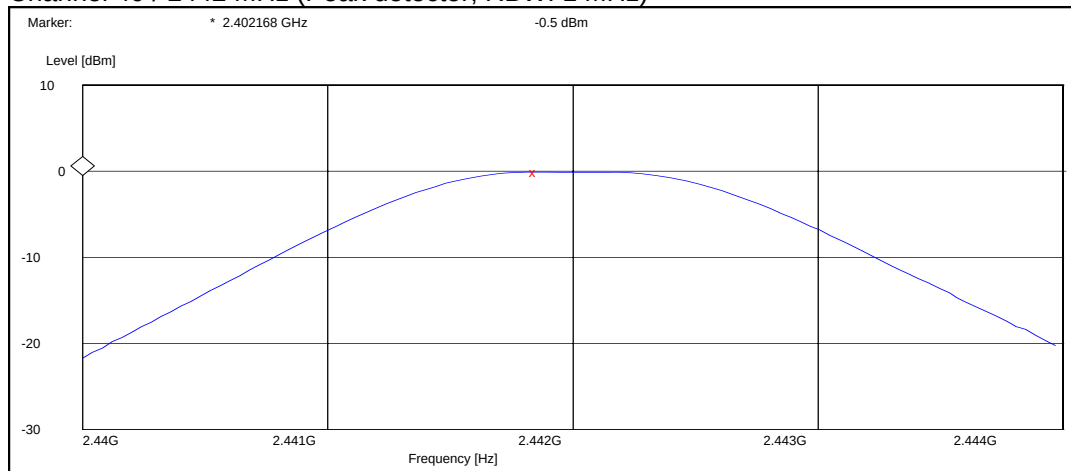

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz)

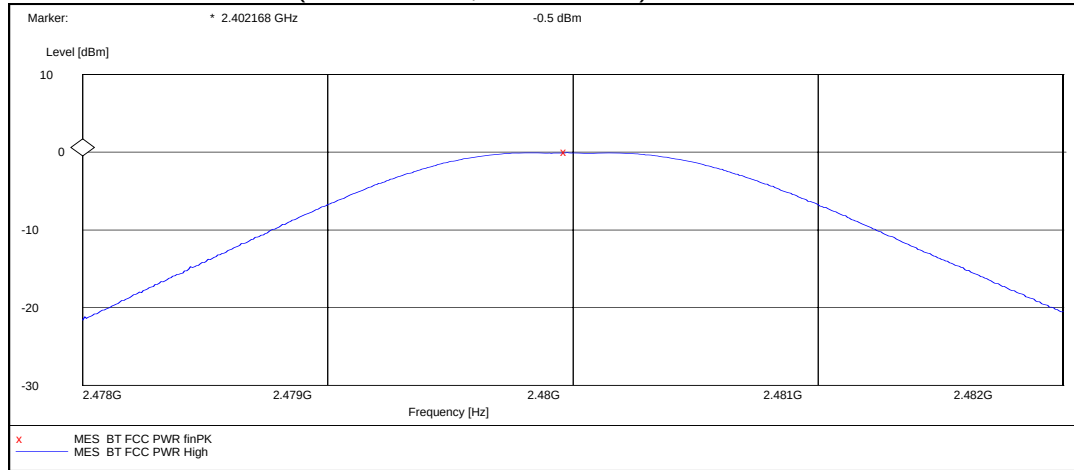

4. Spurious RF conducted emissions (FCC §15.247(c), RSS-A8.5)

EUT with DUT number	RM-216 dut 27803, BL-4C dut 27805
Accessories with DUT numbers	AC-3 dut 27898, HS-23 dut 28104
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	23.5 / 45.5 1025.4
Date of measurements	2-11-2006
Measured by	Jan Engelbrechtsen

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

4.2. Bluetooth Test results


4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

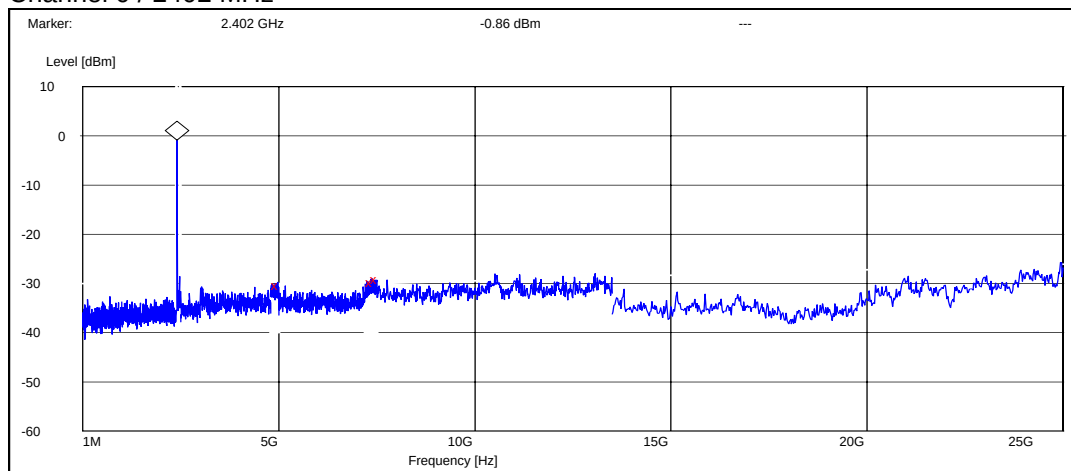


Frequency [MHz]	P [dBc]	Result
4980.800000	-29.436635	Passed
7378.800000	-28.836635	Passed
7500.000000	-28.236635	Passed

Channel 40 / 2442 MHz

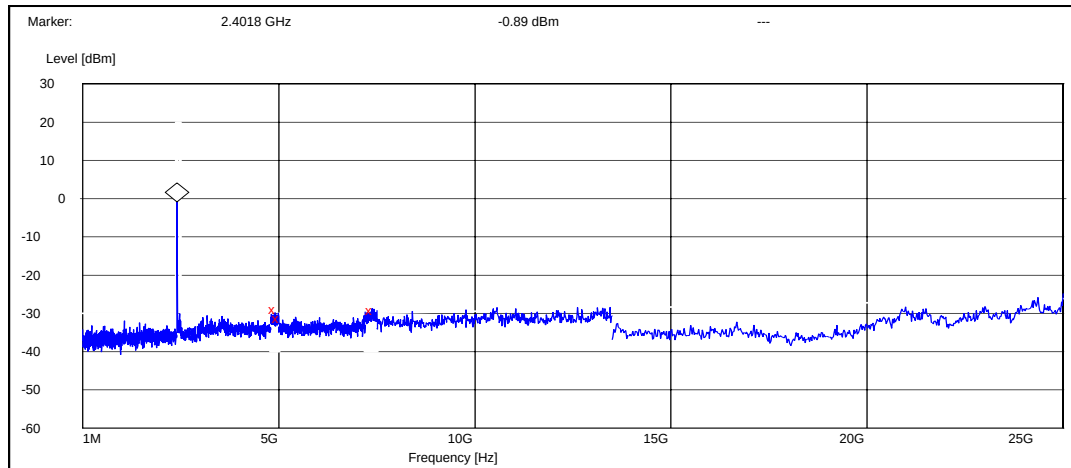

Frequency [MHz]	P [dBc]	Result
4911.200000	-28.211232	Passed
5000.000000	-30.411232	Passed
7380.000000	-28.311232	Passed

Channel 78 / 2480 MHz

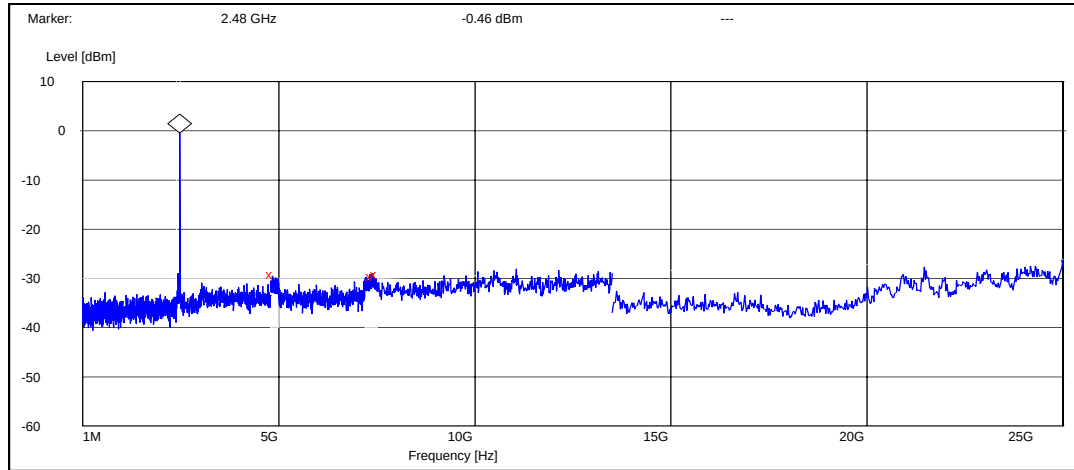

Frequency [MHz]	P [dBc]	Result
4834.000000	-28.738341	Passed
7400.400000	-29.038341	Passed
7500.000000	-28.638341	Passed

5. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-216 Dut # 27813
Accessories with DUT numbers	BL-4C Dut # 27812 + AC-3E Dut # 27811 + HS-23 Dut # 27808
Operation Voltage [V] / [Hz]	115 / 60
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	22.6 / 44.0 1008
Date of measurements	26-10-2006
Measured by	Allan F. Henriksen

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

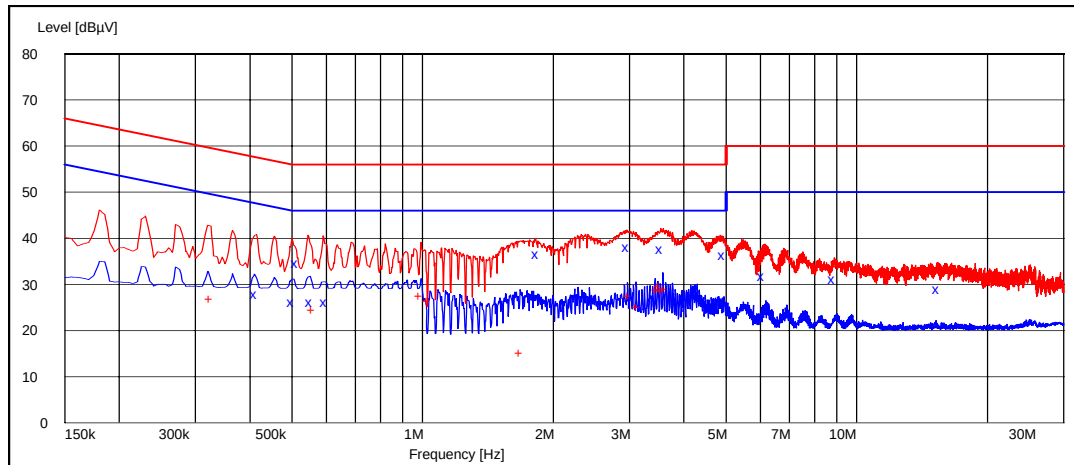

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.415000	27.90	L1	Passed
0.505000	26.20	N	Passed
0.515000	34.70	L1	Passed
0.555000	26.20	N	Passed
0.600000	26.20	N	Passed
1.850000	36.70	L1	Passed
2.980000	38.10	N	Passed
3.565000	37.70	N	Passed
4.965000	36.30	N	Passed
6.110000	31.80	N	Passed
8.895000	31.20	L1	Passed
15.445000	29.10	L1	Passed

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.325000	26.80	L1	Passed
0.560000	24.40	N	Passed
0.990000	27.40	N	Passed
1.035000	26.50	N	Passed
1.685000	15.00	N	Passed
2.995000	27.40	N	Passed
3.140000	25.10	N	Passed
3.485000	28.90	N	Passed
3.530000	29.70	N	Passed
3.580000	28.50	N	Passed
3.630000	29.00	N	Passed

6. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))

EUT with DUT number	RM-216 dut 27803, BL-4C dut 27805
Accessories with DUT numbers	AC-3 dut 27898, HS-23 dut 28104
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	23.5 / 45.5 1025.4
Date of measurements	2-11-2006
Measured by	Jan Engelbrechtsen

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

6.2. Bluetooth Test results


6.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	936.000	Passed
40 / 2442	968.000	Passed
78 / 2480	964.000	Passed


Channel 0 / 2402 MHz

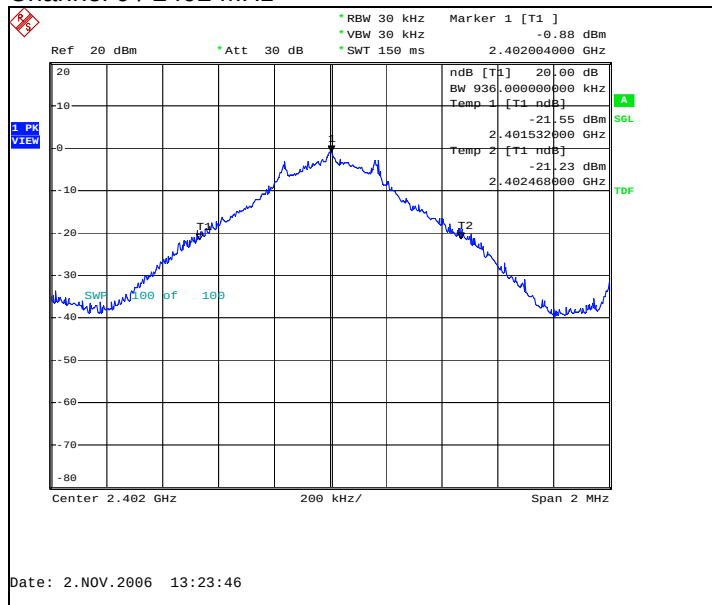

Channel 40 / 2442 MHz

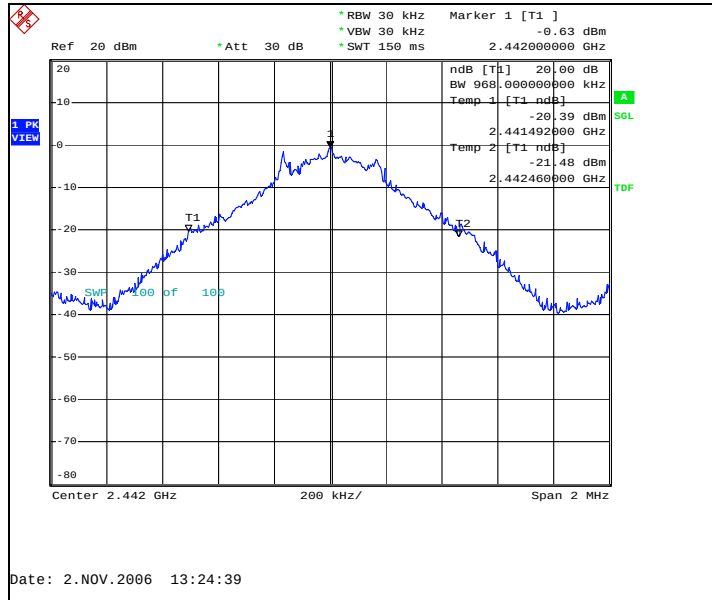

Channel 78 / 2480 MHz

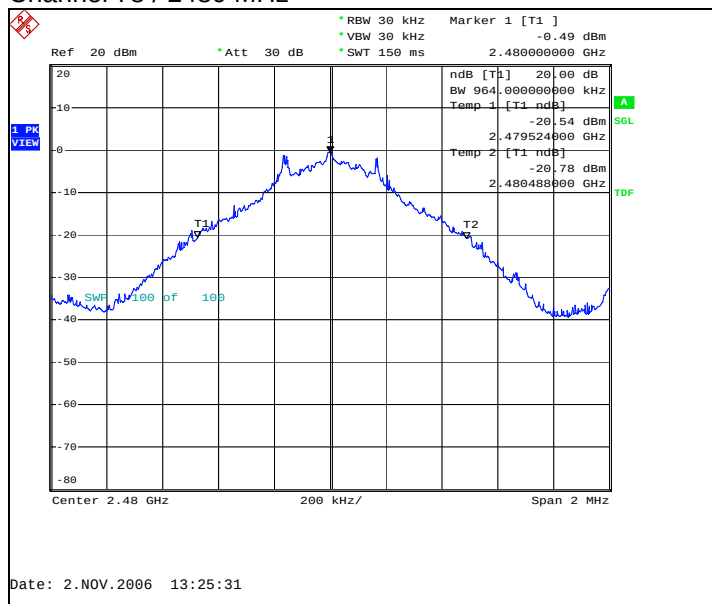

7. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))

EUT with DUT number	RM-216 dut 27803, BL-4C dut 27805
Accessories with DUT numbers	AC-3 dut 27898, HS-23 dut 28104
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	23.5 / 45.5 1025.4
Date of measurements	2-11-2006
Measured by	Jan Engelbrechtsen

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or 2/3 of the 20 dB bandwidth

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1010	Passed

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

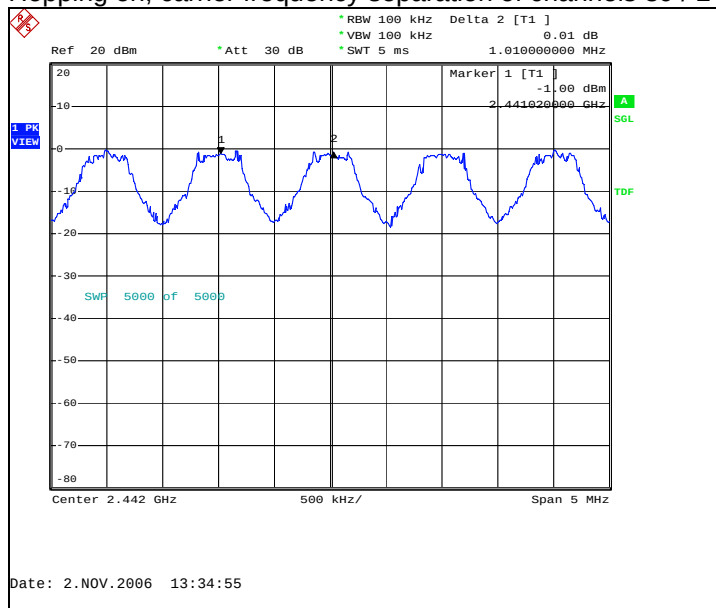

8. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-216 dut 27803, BL-4C dut 27805
Accessories with DUT numbers	AC-3 dut 27898, HS-23 dut 28104
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	23.5 / 45.5 1025.4
Date of measurements	2-11-2006
Measured by	Jan Engelbrechtsen

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

8.2. Bluetooth Test results

8.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	Passed

Hopping on, number of hopping frequencies

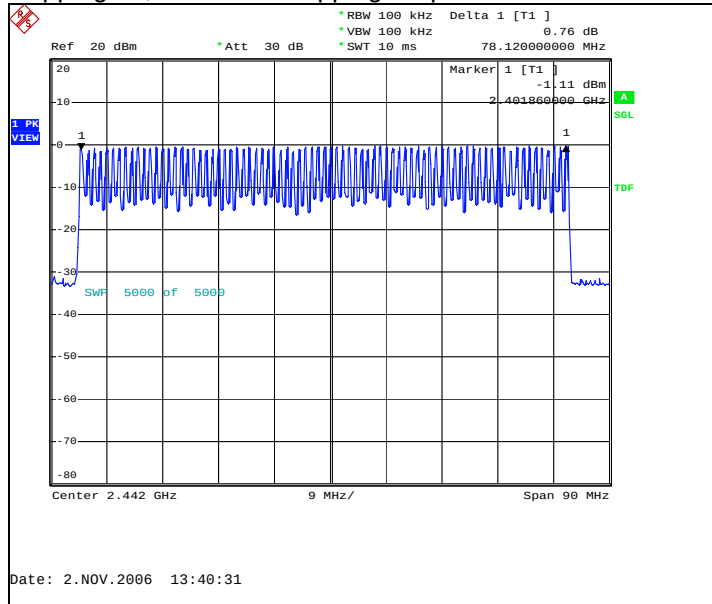

9. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-216 dut 27803, BL-4C dut 27805
Accessories with DUT numbers	AC-3 dut 27898, HS-23 dut 28104
Operation Voltage [V] / [Hz]	230 / 50
Result	Passed
Remarks	None
Temp [°C] / Humidity [%RH] / Air Pressure [mBar]	23.5 / 45.5 1025.4
Date of measurements	2-11-2006
Measured by	Jan Engelbrechtsen

9.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

9.2. Bluetooth test results


9.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [μ s]	Time of occupancy [s]	Result
71	2968.000	0.210728	Passed

Hopping on, number of transmissions, channel 40 / 2442 MHz

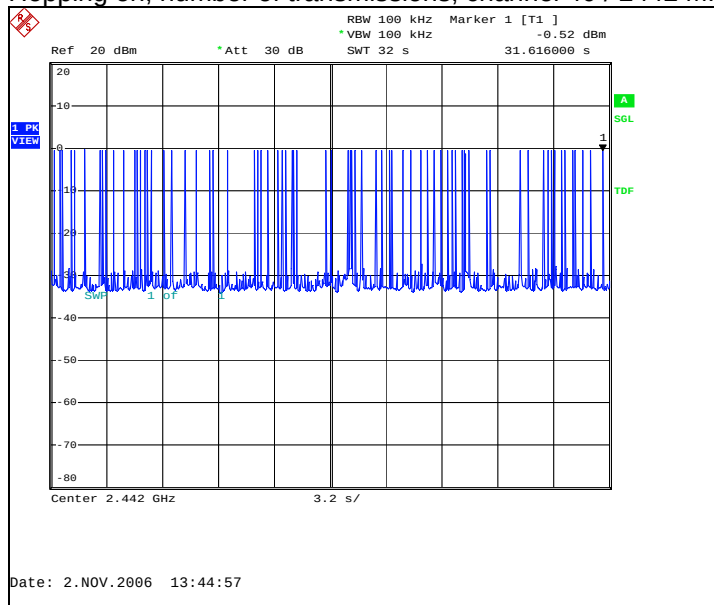

Hopping on, duration of one transmission, channel 40 / 2442 MHz

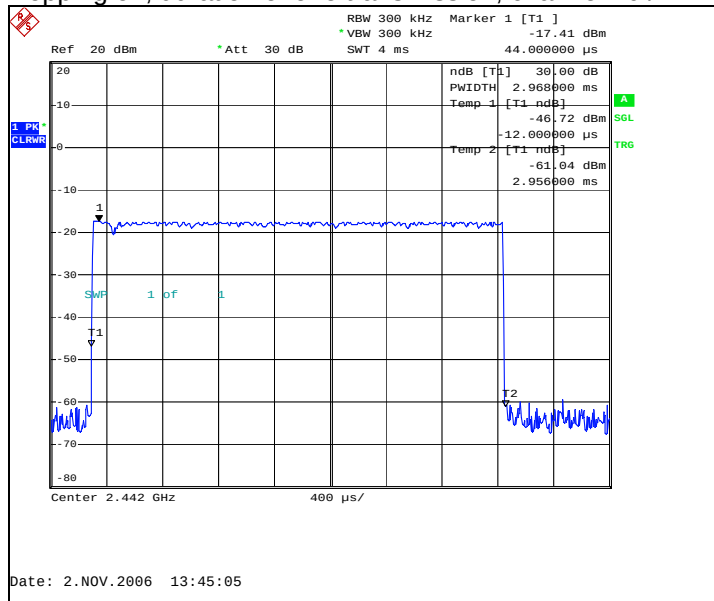

10. Test Equipment

10.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
13037	Power Supply 0-15V 10A	EA3012	LP Instruments	15C, 15B
13513	Pulse Limiter 9KHz-30MHz	ESH3Z2	Rohde&Schwarz	15C, 15B
13666	EMI Test Reciever 9KHz-2,5GHz	ESPC	Rohde&Schwarz	15C, 15B
13935	Two Lines Artificial Mains Network	ESH3-Z5	Rohde&Schwarz	15C, 15B
16995	Directional Coupler 20dB 0,5-2,0 GHz SMA Conn.	1538RA-20	Weinschel	15C, 15B
18772	Shielded Chamber	RFD-100	ETS-Lindgren	15C, 15B
19171	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	15C, 15B
11386	System DC Power Supply	HP6632A	Hewlett Packard	22/24, 15C, 15B
19678	Spectrum Analyzer 26 GHz	FSP	Rohde&Schwarz	22/24, 15C, 15B
16601	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24, 15C, 15B
19625	Vötsch Climatic Chamber	VT4002EMC	Vötsch	22/24, 15C, 15B
13357	Rohde & Schwartz Signal Generator	SMP02	Rohde&Schwarz	22/24, 15C, 15B

10.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
18416	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	22/24, 15C, 15B
	Programmable Relay Switching System	-----	Pickering	22/24, 15C, 15B
15742	Programmable Relay Switching System	-----	Pickering	22/24, 15C, 15B
14020	Power Supply Module Relay Switching System 45W	10-910-002	Pickering	22/24, 15C, 15B
15743	Power Supply Module Relay Switching System 50W	10-910L-001	Pickering	22/24, 15C, 15B
16490	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24, 15C, 15B
	RS-232/IEEE-488.2 Interface	10-921-001	Pickering	22/24, 15C, 15B
20078	Relay 2x6 Chnl μ Wave Mux	10-785B-522	Pickering	22/24, 15C, 15B
14021	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24, 15C, 15B
	Relay Dual 6 Chnl μ Wave Mux	10-785-522		22/24, 15C, 15B
17644	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
16948	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
16949	Dual 6 Channel MUX Microwave Relay SMA 50 Ohm	10-785-522	Pickering	22/24, 15C, 15B
18792	Multi Device Controller	2090	ETS-EMCO	22/24, 15C, 15B
14963	RF Preampifier 100MHz-4GHz (Metal Chassis)	AFS3-00100400	Miteq/NMP Cph	22/24, 15C, 15B
18861	EMI Test Receiver 20Hz-26,5GHz	ESI	Rohde&Schwarz	22/24, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
18860	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24, 15C, 15B
19830	Ultra Broadband Antenna Ultralog 30-3000MHz	HL562	Rohde&Schwarz	22/24, 15C, 15B
18773	Shielded Chamber	RFD-100	ETS-Lindgren	22/24, 15C, 15B
18774	Shielded Chamber	RFSD-F/A-100	ETS-Lindgren	22/24, 15C, 15B
19151	High Pass Filter 3GHz WHK3.0/18G-10ss	WHJS3000-10SS	Wainwright	22/24, 15C, 15B
13937	Ultra Stable Notch Filter 850MHz	WRCA902.4-0.2/40-6SS	Wainwright Instruments	22/24, 15C, 15B
13936	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright Instruments	22/24, 15C, 15B
13917	Highpass Filter 1000-3000MHz 50OHM SMA Conn	WHKS1000-10SS	Wainwright Instruments	22/24, 15C, 15B
14188	Ultra Stable Notch Filter 902,4MHz	WRCA902.4-0.2/40-6SS	Wainwright	22/24, 15C, 15B
14187	Ultra Stable Notch Filter 1747,5MHz	WRCD1747.5-0.2/40- 10SS	Wainwright	22/24, 15C, 15B
16633	Ultra Stable Notch Filter 1880,0MHz	WRCD1880.0-0.2/40- 10SS	Wainwright	22/24, 15C, 15B
19587	BT/WLAN Band Reject Filter	WRCG2400/2483- 2390/2493-35/10SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 4 filter	WRCG1737/1743- 1733/1747-40/6SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 5&6 filter	WRCG832/83/-825/845- 40/5SS	Wainwright	22/24, 15C, 15B
	WDCMA Band 8 filter	WRCG894.6/900.6- 890.6/904.6-40/80SS	Wainwright	22/24, 15C, 15B
18323	Band reject filter 1947-1953MHz 40dB	WRCG1947/1953- 1940/1960-40/6SS	Wainwright	22/24, 15C, 15B
20031	Double Ridged Broadband Horn	BBHA 9120 D	SCHWARZBECK	22/24, 15C, 15B
15190	Infra Red Remote Control Unit	4630	Emco	22/24, 15C, 15B
14993	EMI Test Receiver 9KHz- 2750MHz	ESCS30	Rohde&Schwarz	22/24, 15C, 15B
15191	Turntable Contoller Unit	G-800SDX	YAESU	22/24, 15C, 15B
14900	Antenna Controller	HD100	HD GmbH	22/24, 15C, 15B
15105	Attenuator 30dB DC-1000MHz 50 Ohm Nf - Nm	NAT-30	Mini-Circuits	22/24, 15C, 15B
13302	Spectrum Analyzer 9KHz- 12.8GHz	HP8596E	Hewlett Packard	22/24, 15C, 15B
11584	Spectrum analyzer 50Hz- 6,5GHz	HP8561B	Hewlett Packard	22/24, 15C, 15B
13134	Tracking generator	HP85645A	Hewlett Packard	22/24, 15C, 15B
19374	Resonant Dipole Antenna 850MHz SMA m Conn.	-----	NMP Cph	22/24, 15C, 15B
19375	Resonant Dipole Antenna 1900MHz SMA m Conn.	-----	NMP Cph	22/24, 15C, 15B
11487	Network analyzer 300KHz- 3,0GHz	HP8753A	Hewlett Packard	22/24, 15C, 15B
14807	S - Parameter Test Set 300KHz- 6GHz	HP85047A	Hewlett Packard	22/24, 15C, 15B
17277	Multimeter Digital 6 1/2 Digit	AT34401A	Agilent Technologies	22/24, 15C, 15B