

FCC Part 15C Compliance Test Report

Test Report no.:	Tre_FCC_0838_02.doc	Date of Report:	02-Oct -2008
Number of pages:	63	Customer's Contact person:	Lasse Vaattovaara
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O. Box 86 Joensuunkatu 7 FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 44277
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	Phone RM-449 / Battery BP-4L, AC charger AC-8E, Headset HS-125		
FCC ID:	PYARM-449	IC:	661V-RM449
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, Test System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	15-Sep-2008
Testing completed	
The customer's contact person	None
Test Plan referred to	T:\Projects\RM-449\TestPlan_RS\RS_Testplan_RM-449.xls
Notes	-
Document name	T:\Projects\RM-449\EMC\Results\FCC\Tre_FCC_0838_02.doc

1.1. EUT and Accessory Information

The EUT is a 6-band (GSM850/900/1800/1900 and WCDMA Band II(1900)/V(850)) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-449	004401103174963	0691	-	100.21.55	41660
Phone	RM-449	004401103175028	0691	-	100.21.55	41656
Battery	BP-4L	-	-	-	-	41658
Battery	BP-4L	-	-	-	-	41348
AC Charger	AC-8E	-	-	-	-	41659
AC Charger	AC-8E	-	-	-	-	41662
Headset	HS-125	-	-	-	-	41657
Headset	HS-125	-	-	-	-	41661

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8.1 (1)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (2)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Time of occupancy	PASSED

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(2)	A8.2 (1)	6 dB bandwidth	PASSED
15.247(e)	A8.2 (2)	Power spectral density	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	5
2.1. Conducted RF test setup	5
2.2. AC powerline conducted emissions test setup.....	5
2.3. Radiated test setup	5
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))	6
3.1. Test method and limit.....	6
3.2. Bluetooth Test results	7
4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5).....	10
4.1. Test method and limit.....	10
4.2. Bluetooth Test results	11
5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5).....	15
5.1. Test method and limit.....	15
5.2. Bluetooth Test results	16
6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	19
6.1. Test method and limit.....	19
6.2. Bluetooth Test results	20
7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	23
7.1. Test method and limit.....	23
7.2. Bluetooth Test results	24
8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))	26
8.1. Test method and limit.....	26
8.2. Bluetooth Test results	27
9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))	30
9.1. Test method and limit.....	30
9.2. Bluetooth Test results	31
10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4)).....	33
10.1. Test method and limit.....	33
10.2. Bluetooth Test results	34
11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	36
11.1. Test method and limit.....	36
11.2. Bluetooth test results.....	37


12.	Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4)).....	39
12.1.	Test method and limit.....	39
12.2.	WLAN Test results	40
13.	Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)	43
13.1.	Test method and limit.....	43
13.2.	WLAN Test results	44
14.	Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	47
14.1.	Test method and limit.....	47
14.2.	WLAN Test results	48
15.	AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2).....	51
15.1.	Test method and limit.....	51
15.2.	WLAN Test results	52
16.	6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (1)).....	54
16.1.	Test method and limit.....	54
16.2.	WLAN test results.....	55
17.	Power spectral density (FCC §15.247(e), RSS-210 A8.2 (2)).....	58
17.1.	Test method and limit.....	58
17.2.	WLAN test results.....	59
18.	Test Equipment	62
18.1.	Conducted measurements	62
18.2.	Radiated measurements	62

2. Test setups


2.1. Conducted RF test setup

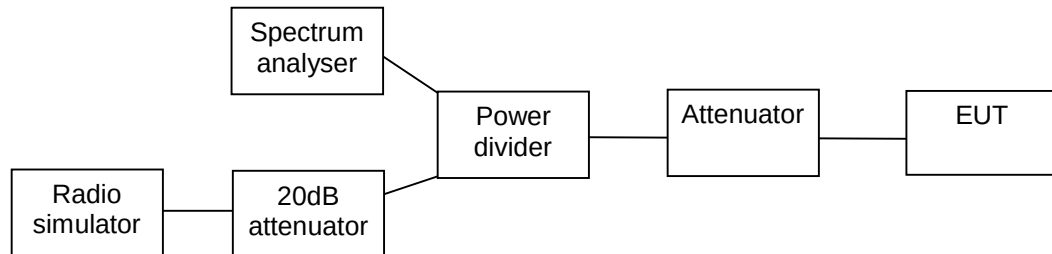

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

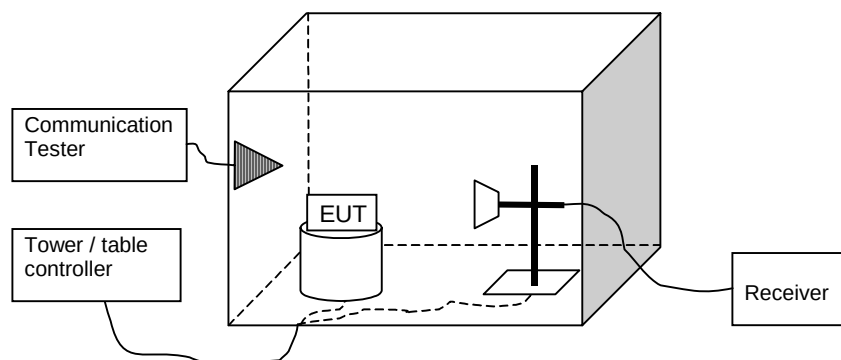

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-449 DUT 41656
Accessories with DUT numbers	BP-4L DUT 41348 / AC-8E DUT 41662 / HS-125 DUT 41661
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 102.7
Date of measurements	23-Sep-2008
Measured by	Petteri Suni

3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	-0.10	0.977	PASSED
40 / 2442	0.50	1.122	PASSED
78 / 2480	0.80	1.202	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

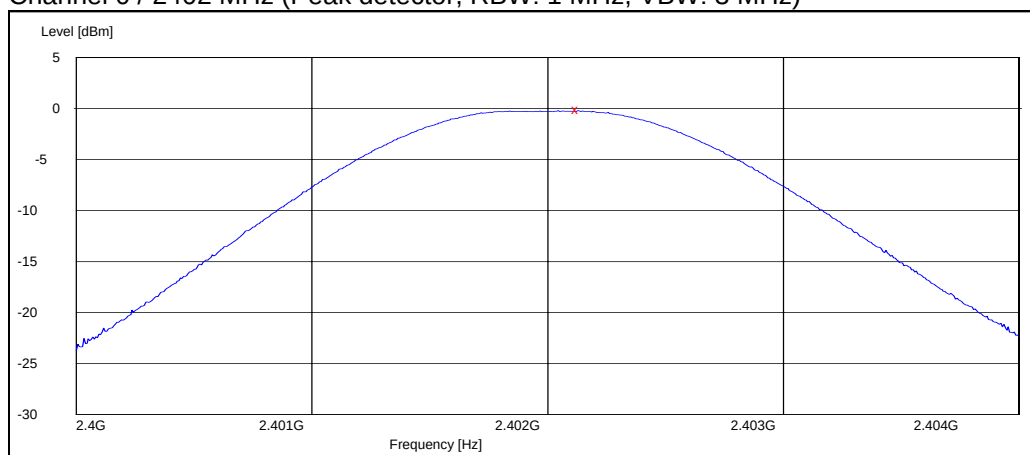

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

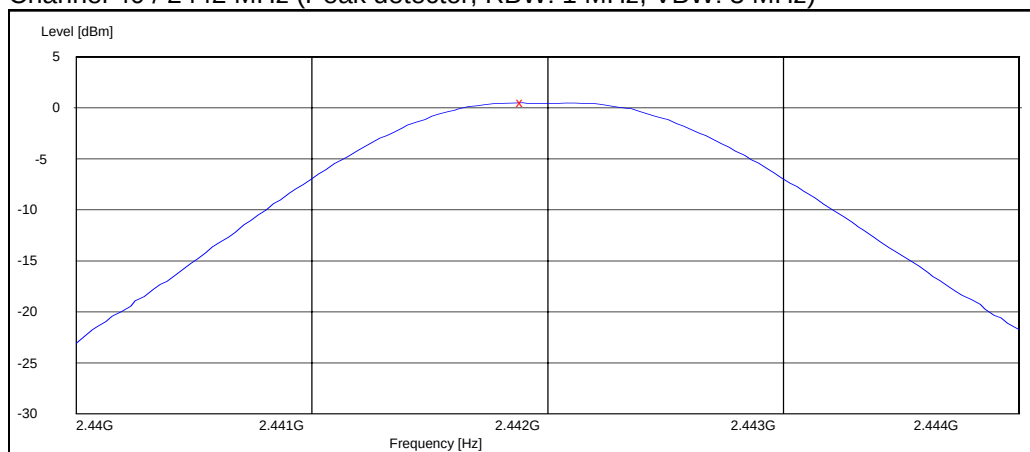


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

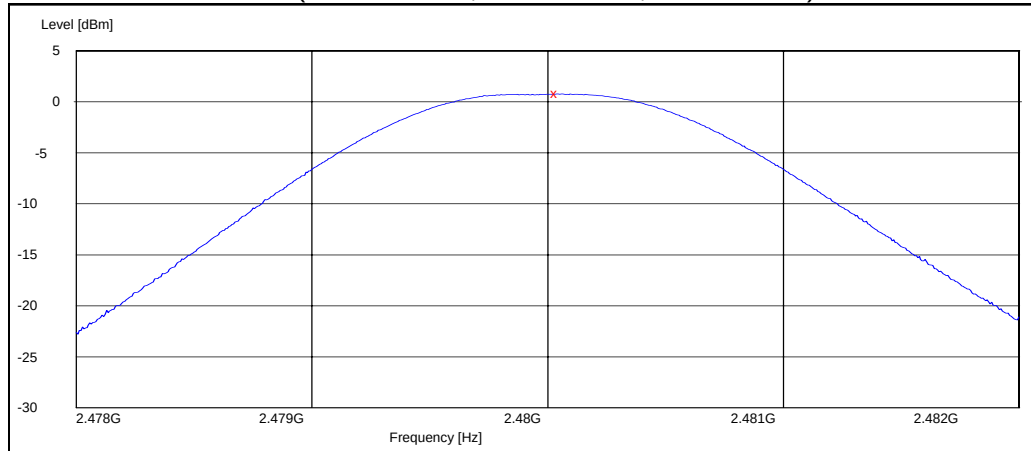


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	0.70	1.175	PASSED
40 / 2442	1.50	1.413	PASSED
78 / 2480	1.90	1.549	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

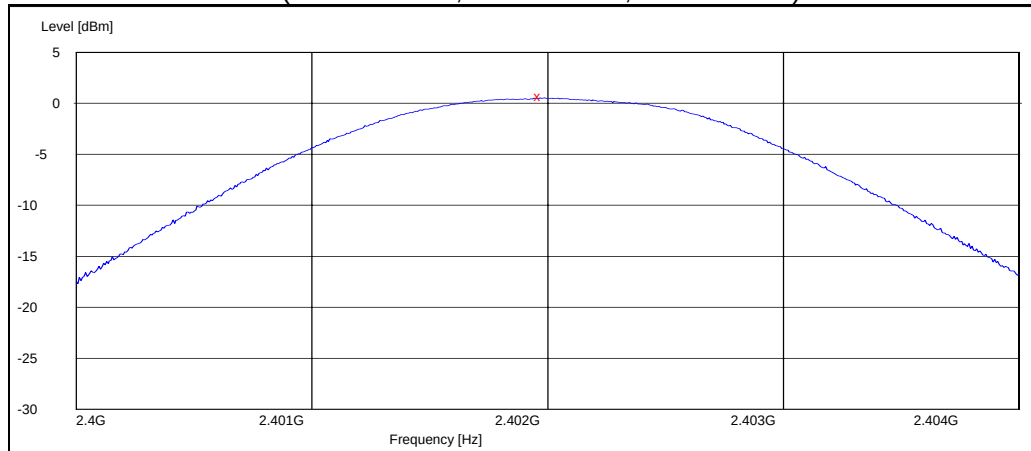

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

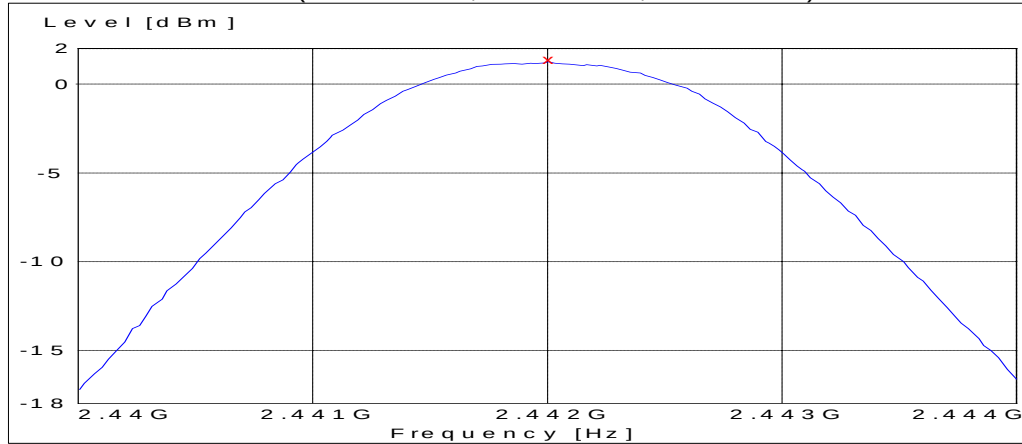

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

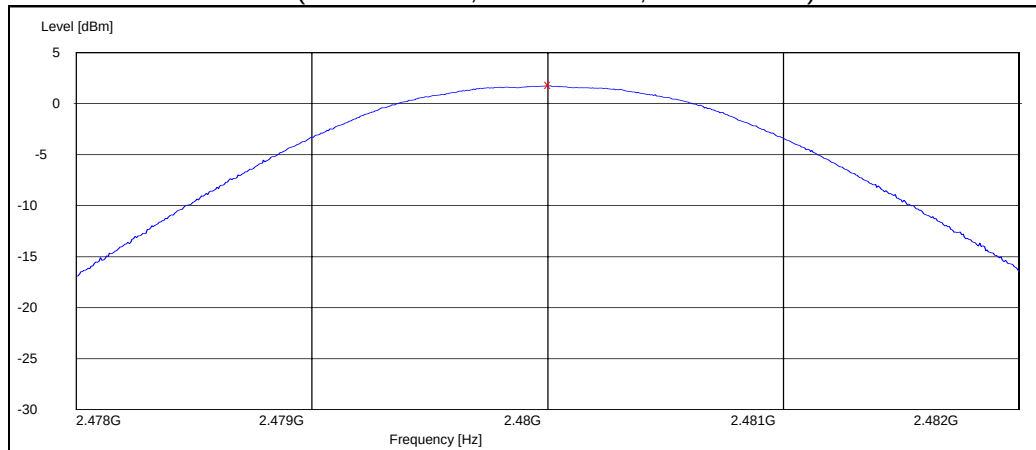

4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-449 DUT 41660
Accessories with DUT numbers	BP-4L DUT 41658, AC-8E DUT 41659, HS-125 DUT 41657
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 46 / 102.7
Date of measurements	18-Sep-2008
Measured by	Jari Jantunen

4.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. Bluetooth Test results


4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

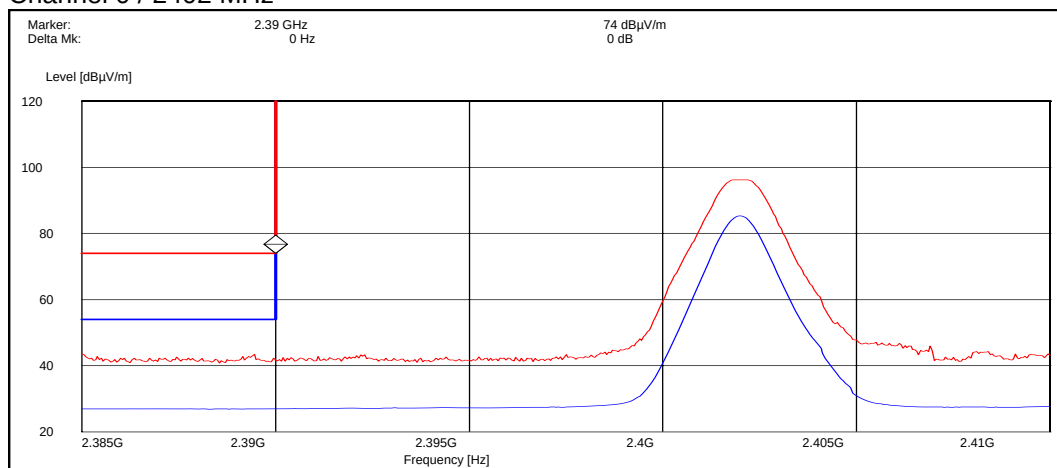


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	43.60	PASSED
Average	27.00	PASSED

Channel 78 / 2480 MHz

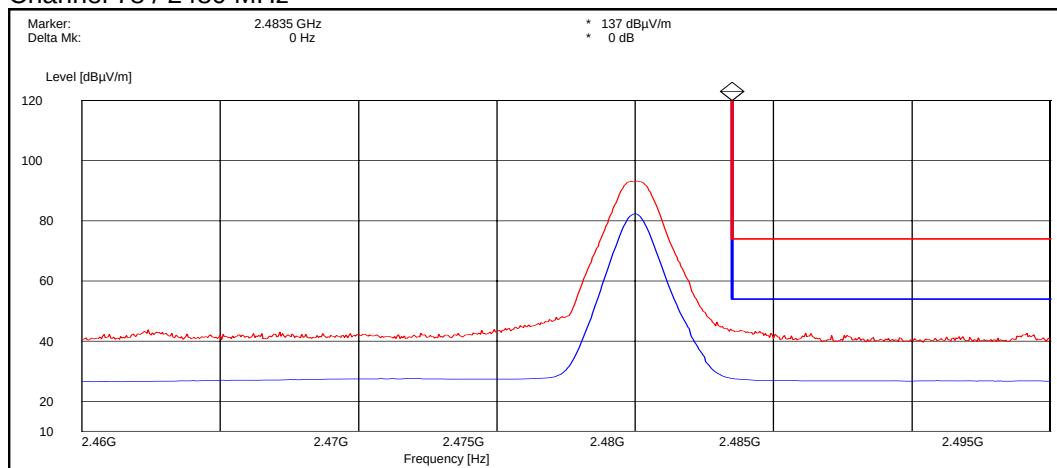


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	43.60	PASSED
Average	27.60	PASSED

Hopping on, low end

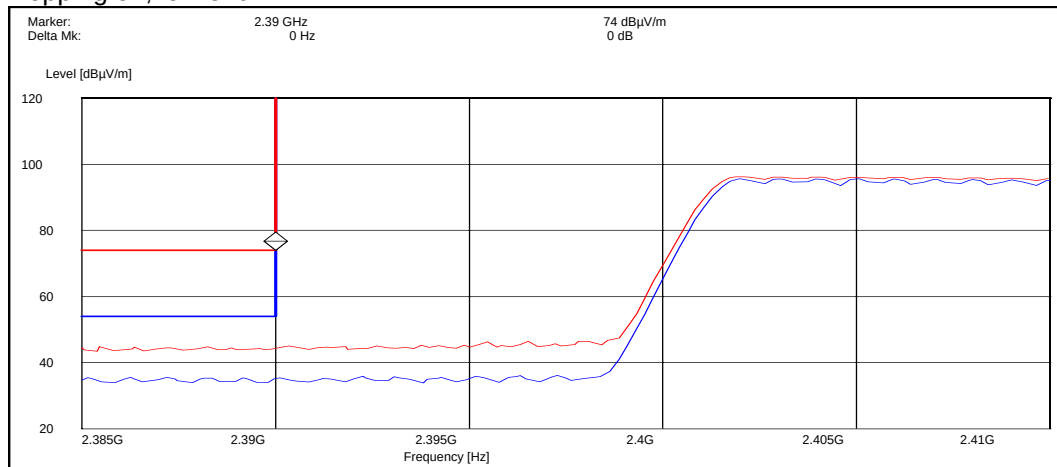

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	44.90	PASSED
Average	35.60	PASSED


Hopping on, high end

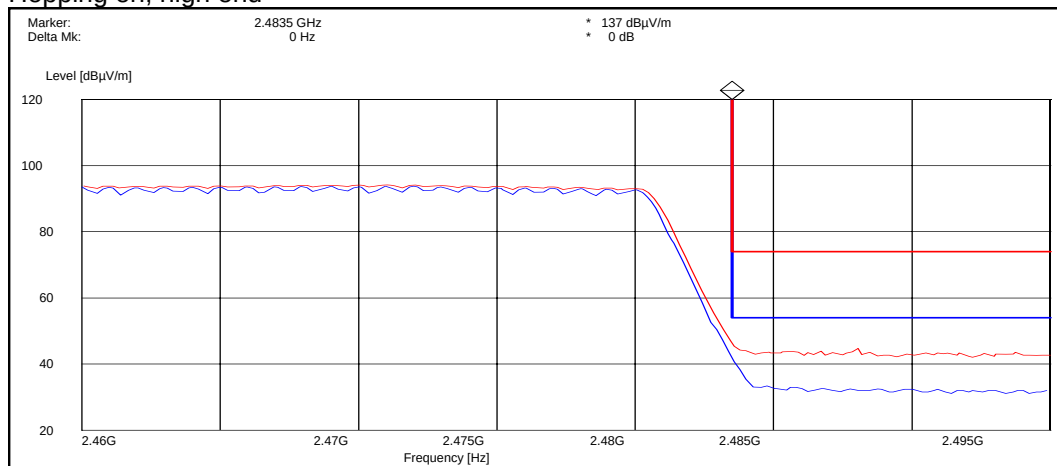

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	45.40	PASSED
Average	40.70	PASSED


4.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

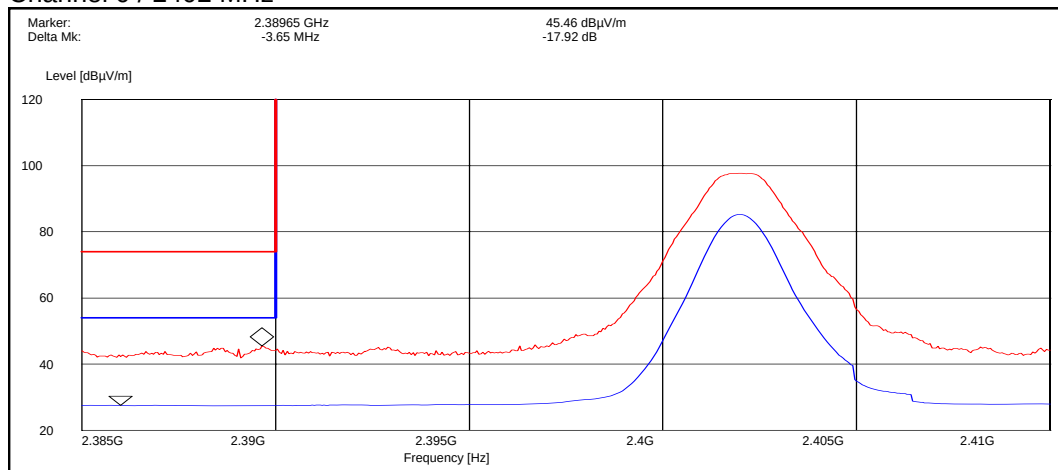


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	45.50	PASSED
Average	27.50	PASSED

Channel 78 / 2480 MHz

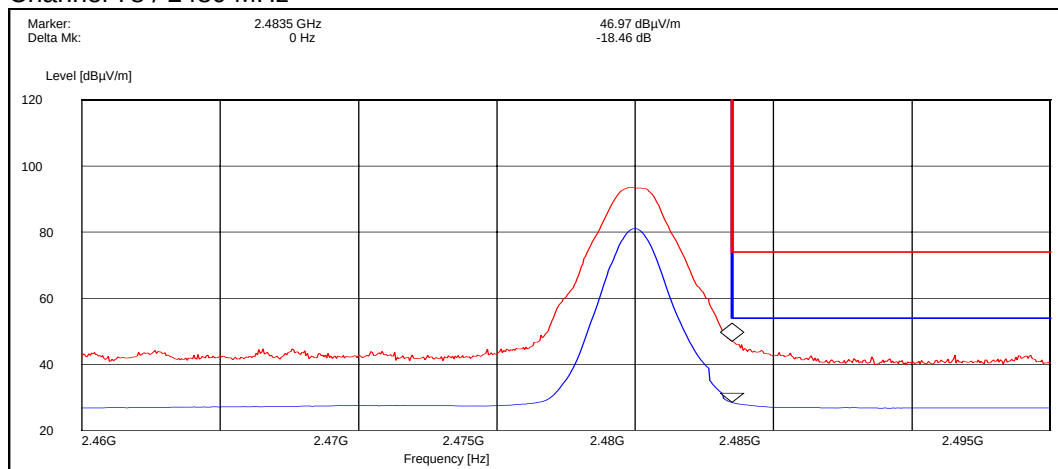


Detector (RBW: 1 MHz)	E [dBμV/m]	Result
Peak	47.00	PASSED
Average	28.50	PASSED

Hopping on, low end

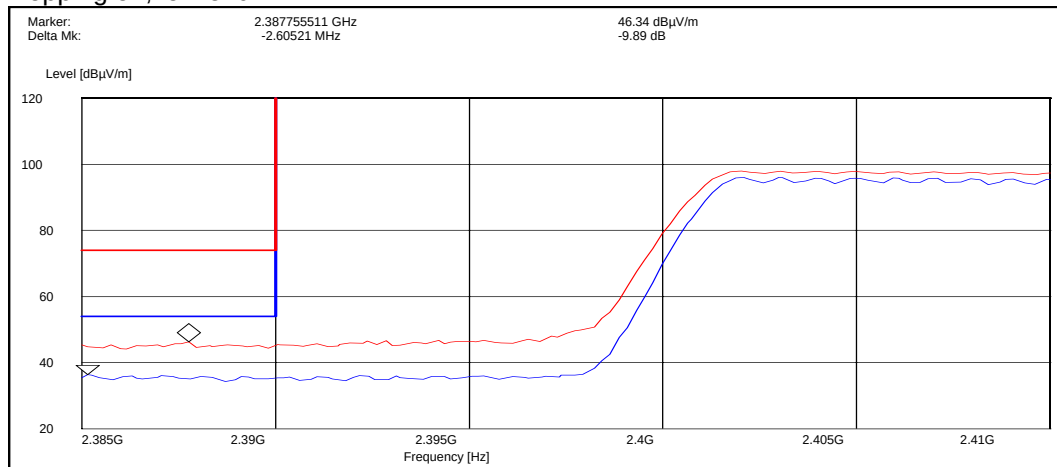

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	46.30	PASSED
Average	36.40	PASSED

Hopping on, high end

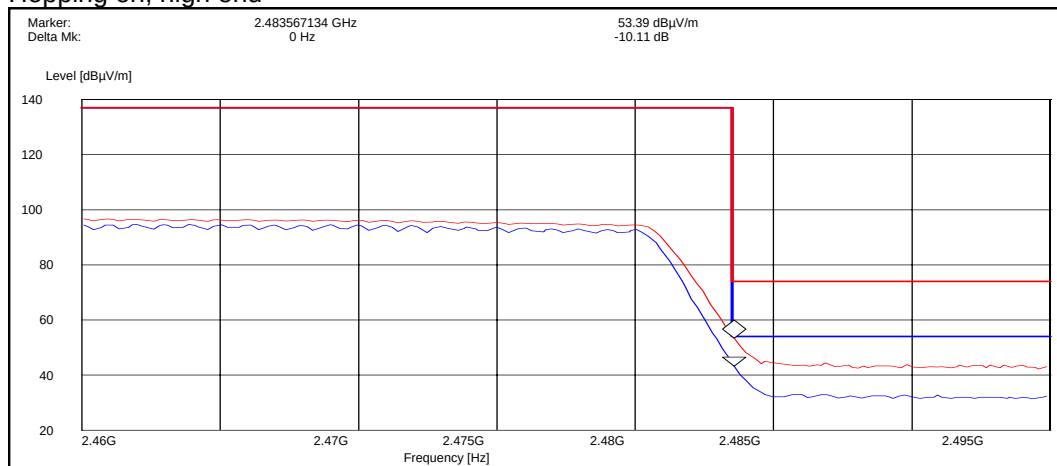

Detector (RBW: 1 MHz)	E [dB μ V/m]	Result
Peak	53.40	PASSED
Average	43.30	PASSED

5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5)

EUT with DUT number	RM-449 DUT 41656
Accessories with DUT numbers	BP-4L DUT 41348 / AC-8E DUT 41662 / HS-125 DUT 41661
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 102.7
Date of measurements	23-Sep-2008
Measured by	Petteri Suni

5.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results

5.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

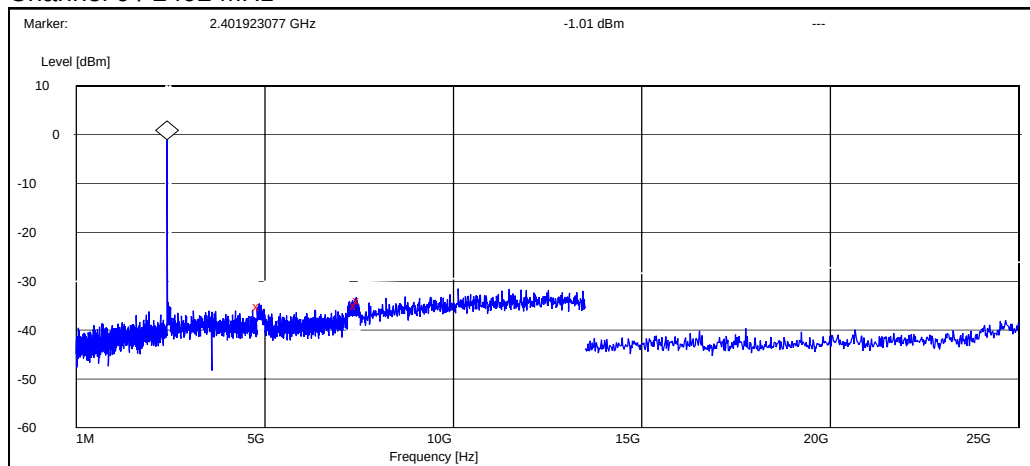

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4855.448718	-34.191294	PASSED
7418.750000	-33.991294	PASSED
7500.000000	-32.991294	PASSED


Channel 40 / 2442 MHz

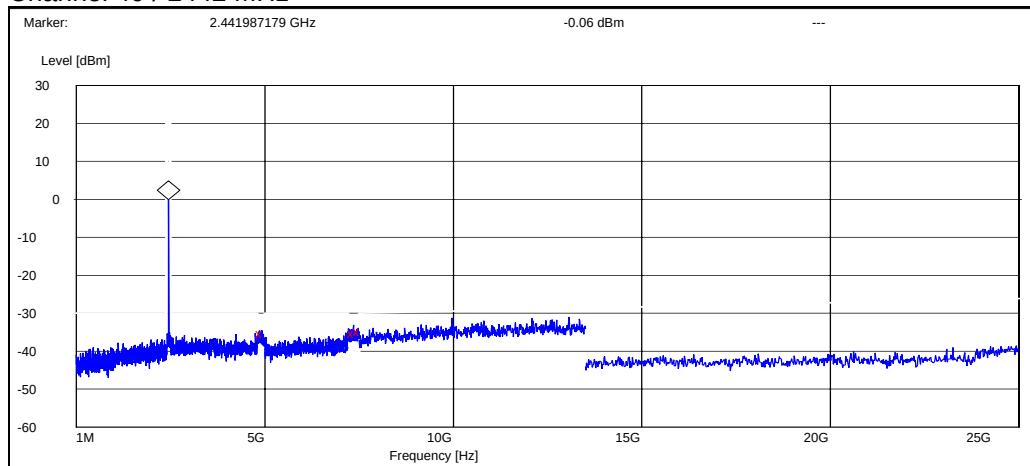

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4919.551282	-35.336281	PASSED
7349.038462	-35.336281	PASSED
7500.000000	-34.836281	PASSED

Channel 78 / 2480 MHz

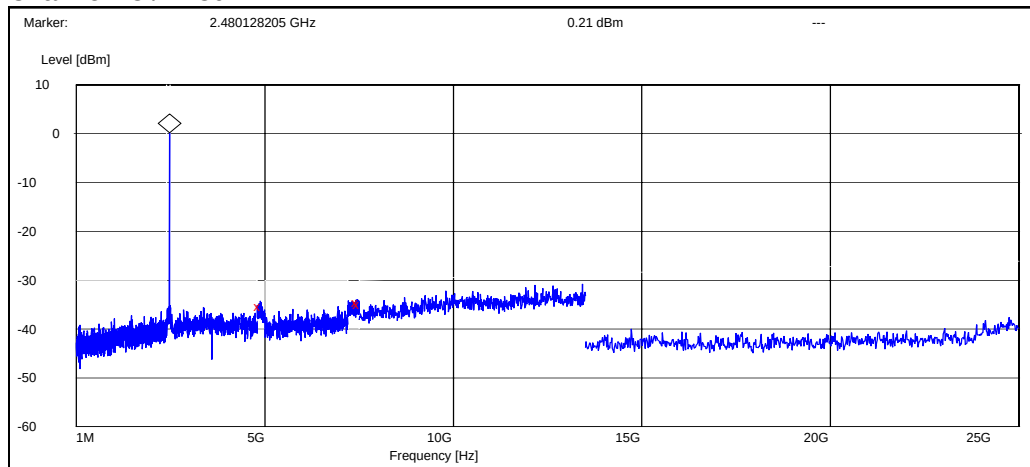


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4875.000000	-35.506337	PASSED
7468.269231	-34.706337	PASSED
7500.000000	-35.106337	PASSED

5.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

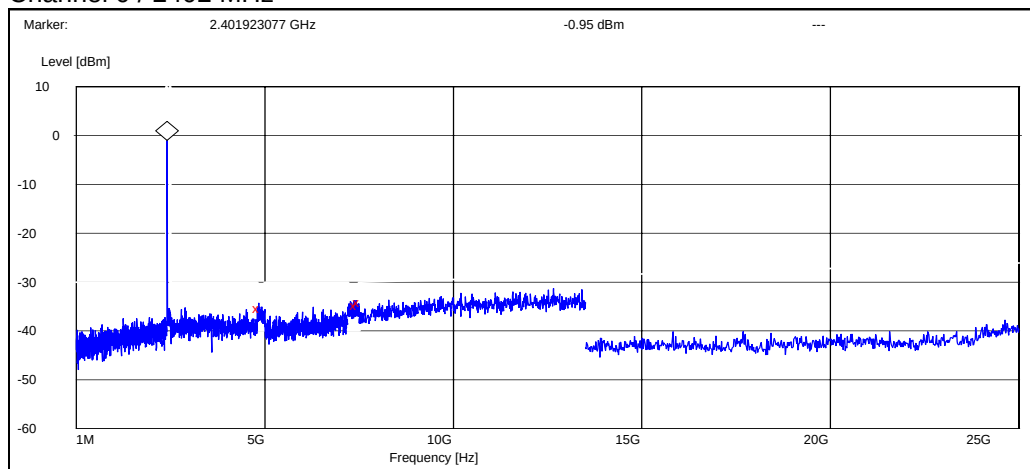

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4839.743590	-34.452093	PASSED
7425.480769	-33.952093	PASSED
7500.000000	-33.252093	PASSED


Channel 40 / 2442 MHz

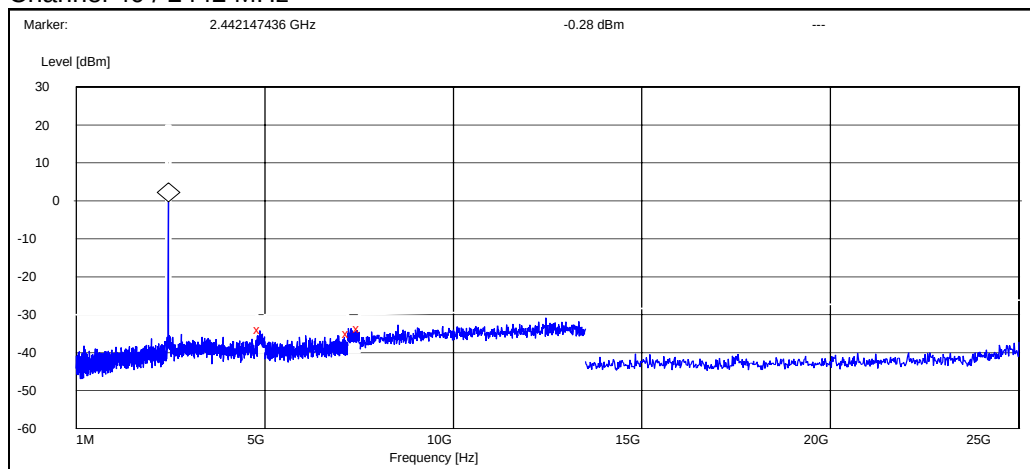

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4863.141026	-33.517619	PASSED
7212.019231	-34.717619	PASSED
7500.000000	-33.417619	PASSED

Channel 78 / 2480 MHz

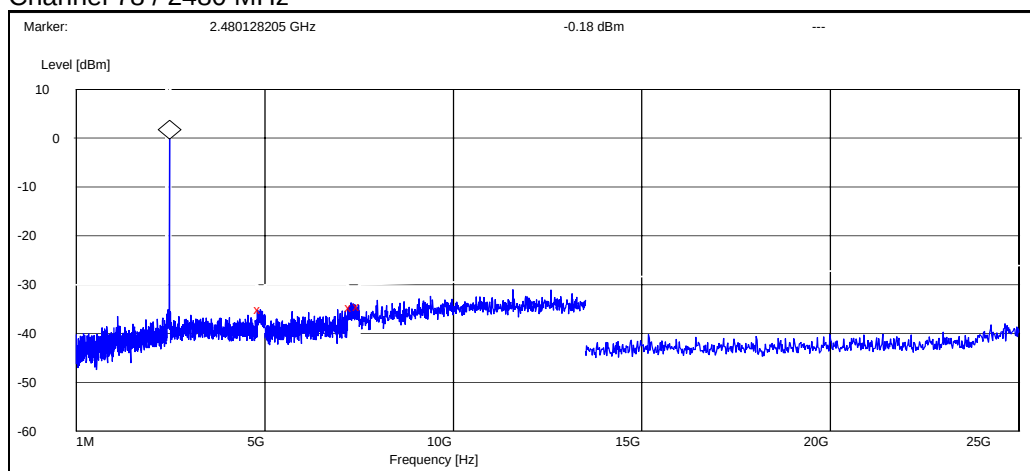

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4887.179487	-34.919366	PASSED
7284.615385	-34.419366	PASSED
7500.000000	-34.219366	PASSED

6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-449 DUT 41660
Accessories with DUT numbers	BP-4L DUT 41658, AC-8E DUT 41659, HS-125 DUT 41657
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 48 / 102.8
Date of measurements	22-Sep-2008
Measured by	Jari Jantunen

6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	39.00	89.13	40.80	-1.8	HORIZONTAL	PASSED
7206.000000	42.20	128.82	39.70	2.5	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	26.30	20.65	28.10	-1.8	HORIZONTAL	PASSED
7206.000000	29.10	28.51	26.60	2.5	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
37.835872	16.20	6.46	30.20	-14.0	VERTICAL	PASSED
75.669940	8.30	2.60	31.80	-23.5	VERTICAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
37.835872	16.20	6.46	30.20	-14.0	VERTICAL	PASSED
75.669940	8.30	2.60	31.80	-23.5	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4884.000000	38.40	83.18	40.80	-2.40	HORIZONTAL	PASSED
7326.000000	42.30	130.32	39.40	2.90	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4884.000000	26.00	19.95	28.40	-2.40	HORIZONTAL	PASSED
7326.000000	29.80	30.90	26.90	2.90	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	40.60	107.15	42.20	-1.6	HORIZONTAL	PASSED
7440.000000	43.20	144.54	39.60	3.6	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	26.70	21.63	28.30	-1.6	HORIZONTAL	PASSED
7440.000000	30.30	32.73	26.70	3.6	VERTICAL	PASSED

6.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	38.80	87.10	40.60	-1.8	VERTICAL	PASSED
7206.000000	42.20	128.82	39.70	2.5	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	26.00	19.95	27.80	-1.8	HORIZONTAL	PASSED
7206.000000	29.00	28.18	26.50	2.5	VERTICAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.776353	17.50	7.50	31.50	-14.0	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7276.561122	43.20	144.54	40.40	2.8	VERTICAL	PASSED
7344.685371	42.60	134.90	39.60	3.0	HORIZONTAL	PASSED
7380.769539	43.50	149.62	40.20	3.3	HORIZONTAL	PASSED
7419.341683	43.30	146.22	39.60	3.7	VERTICAL	PASSED
17873.245491	52.70	431.52	33.70	19.0	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7282.061122	30.00	31.62	27.20	2.8	VERTICAL	PASSED
7346.185371	29.80	30.90	26.80	3.0	HORIZONTAL	PASSED
7386.269539	30.20	32.36	26.80	3.4	HORIZONTAL	PASSED
7421.841683	30.40	33.11	26.70	3.7	VERTICAL	PASSED
17875.745491	39.80	97.72	20.80	19.0	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	39.50	94.41	41.10	-1.6	HORIZONTAL	PASSED
7440.000000	43.60	151.36	40.00	3.6	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	26.70	21.63	28.30	-1.6	VERTICAL	PASSED
7440.000000	30.20	32.36	26.60	3.6	VERTICAL	PASSED

7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-449 DUT 41660
Accessories with DUT numbers	BP-4L DUT 41658, AC-8E DUT 41659, HS-125 DUT 41657
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 41 / 103.0
Date of measurements	18-Sep-2008
Measured by	Jari Jantunen

7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

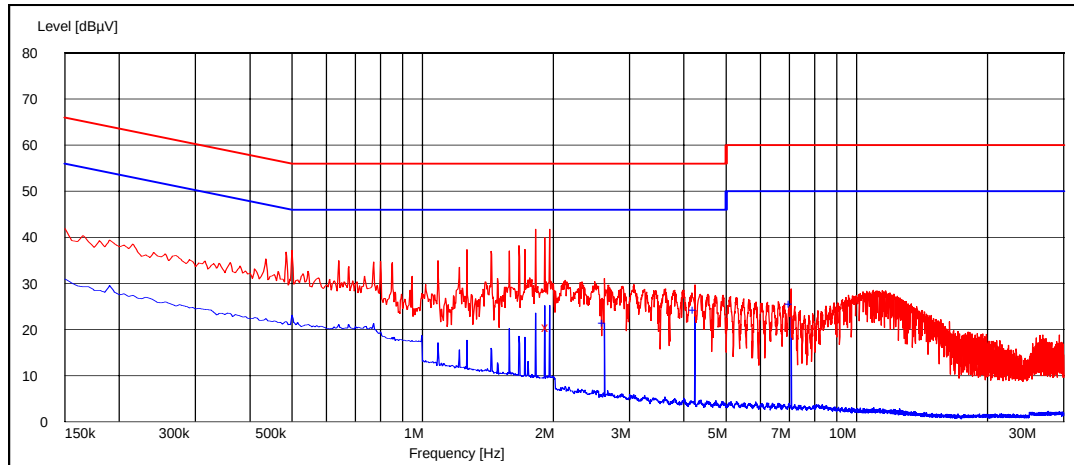

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
1.945000	20.60	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
2.625000	21.40	N	PASSED
4.240000	24.20	N	PASSED
7.065000	25.60	L1	PASSED

7.2.2 8DPSK modulation, PRBS packet type

Channel 40 / 2442 MHz

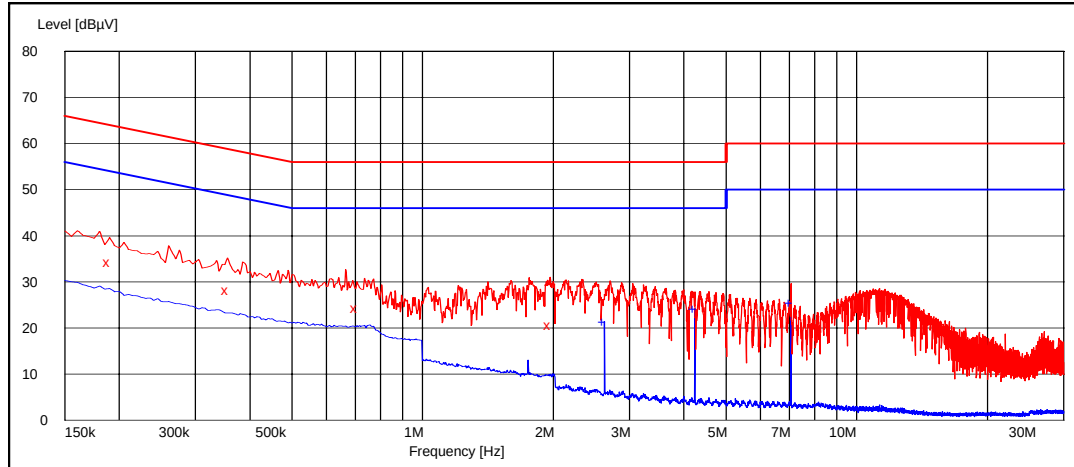

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.190000	34.20	L1	PASSED
0.355000	28.20	L1	PASSED
0.705000	24.30	L1	PASSED
1.965000	20.70	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
2.625000	21.40	N	PASSED
4.240000	24.00	L1	PASSED
7.065000	25.50	L1	PASSED

8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))

EUT with DUT number	RM-449 DUT 41656
Accessories with DUT numbers	BP-4L DUT 41348 / AC-8E DUT 41662 / HS-125 DUT 41661
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 102.7
Date of measurements	23-Sep-2008
Measured by	Petteri Suni

8.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

8.2. Bluetooth Test results


8.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	900.641	PASSED
40 / 2442	903.846	PASSED
78 / 2480	907.051	PASSED


Channel 0 / 2402 MHz

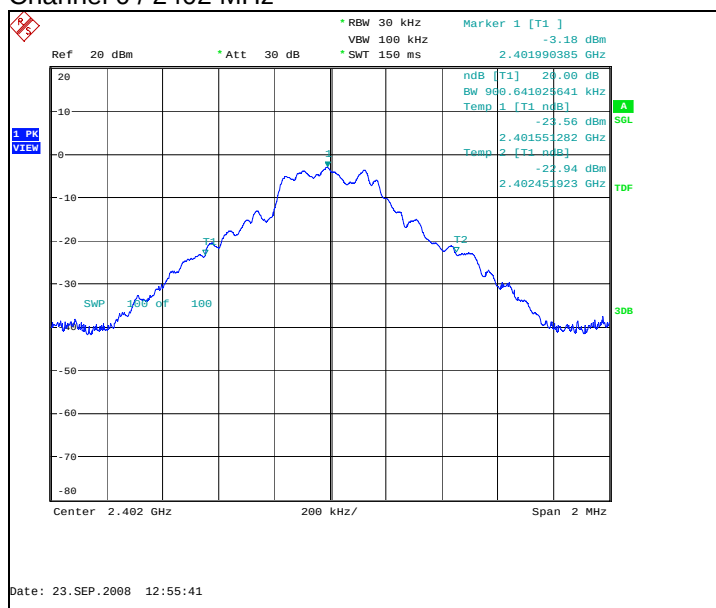

Channel 40 / 2442 MHz

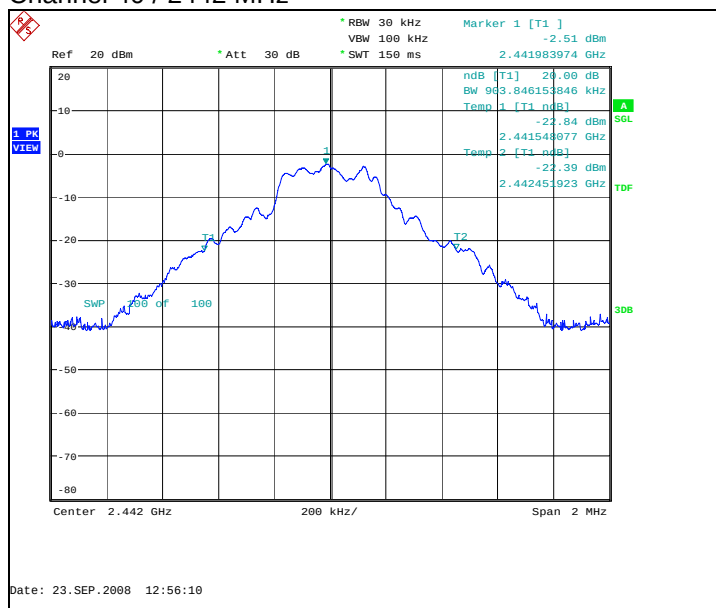


Channel 78 / 2480 MHz

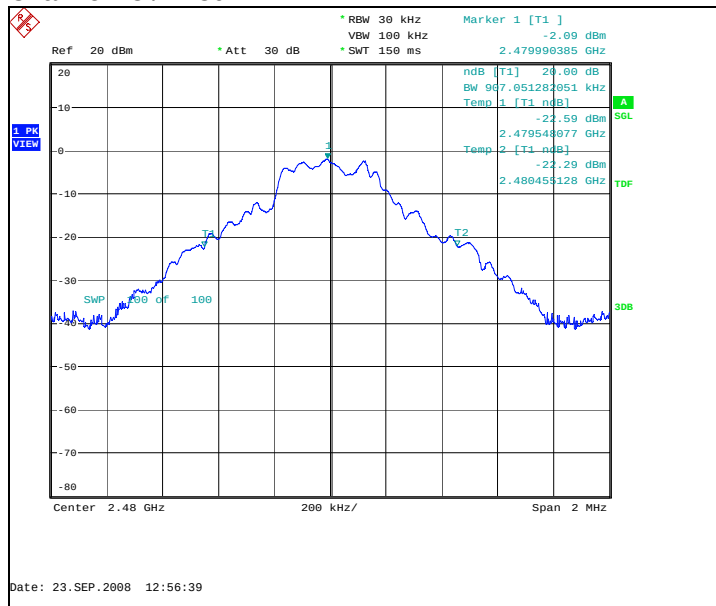


8.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1333.333	PASSED
40 / 2442	1330.128	PASSED
78 / 2480	1333.333	PASSED


Channel 0 / 2402 MHz

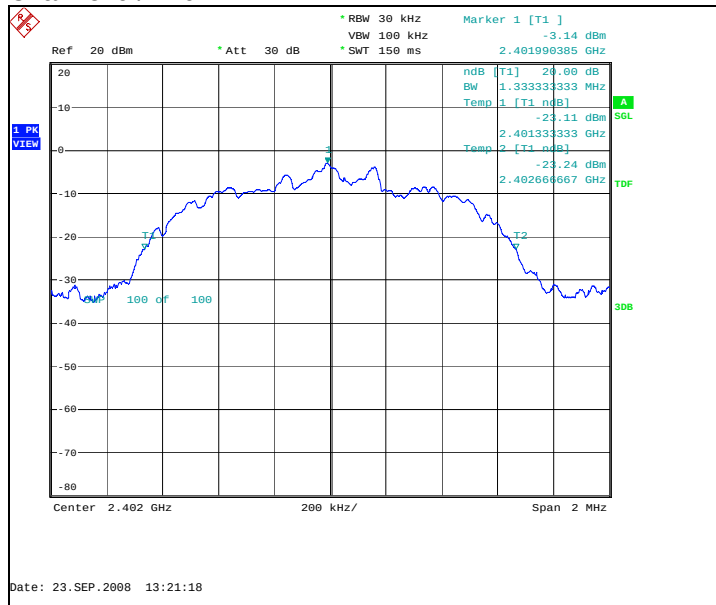

Channel 40 / 2442 MHz

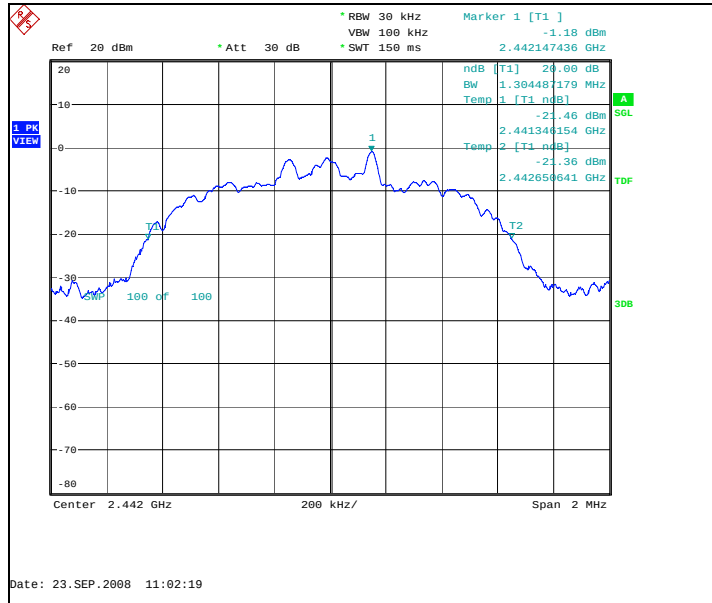

Channel 78 / 2480 MHz

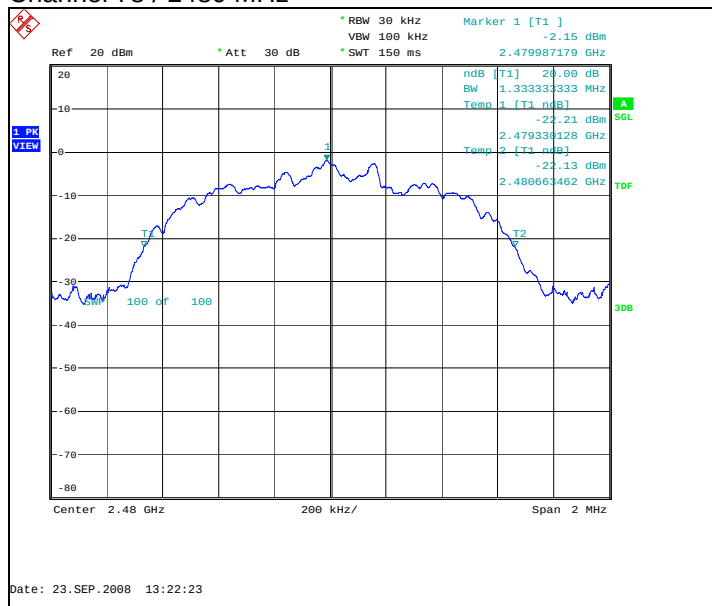

9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))

EUT with DUT number	RM-449 DUT 41656
Accessories with DUT numbers	BP-4L DUT 41348 / AC-8E DUT 41662 / HS-125 DUT 41661
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 102.9
Date of measurements	24-Sep-2008
Measured by	Petteri Suni

9.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

9.2. Bluetooth Test results

9.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
993.59	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

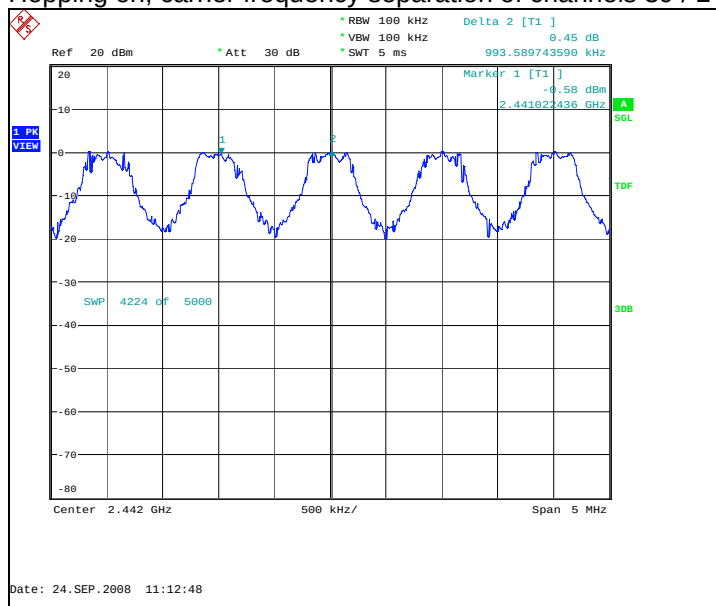

9.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
993.59	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

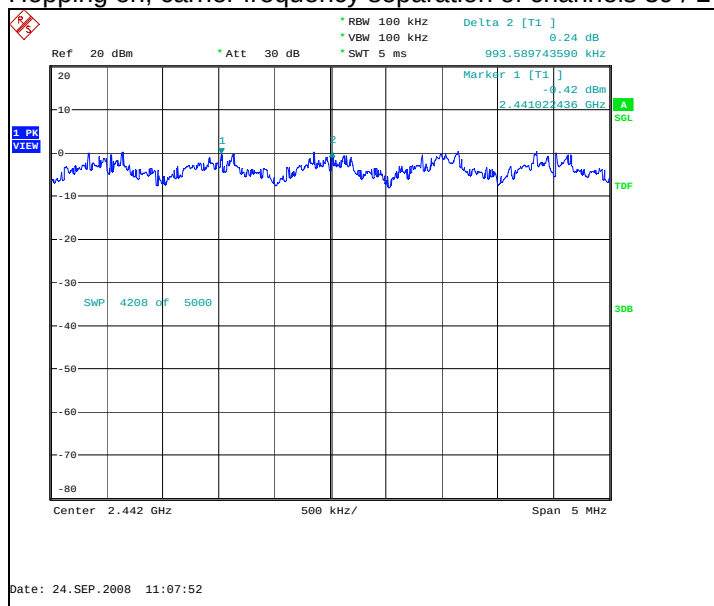

10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-449 DUT 41656
Accessories with DUT numbers	BP-4L DUT 41348 / AC-8E DUT 41662 / HS-125 DUT 41661
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 102.7
Date of measurements	23-Sep-2008
Measured by	Petteri Suni

10.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

10.2. Bluetooth Test results

10.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	PASSED


Hopping on, number of hopping frequencies

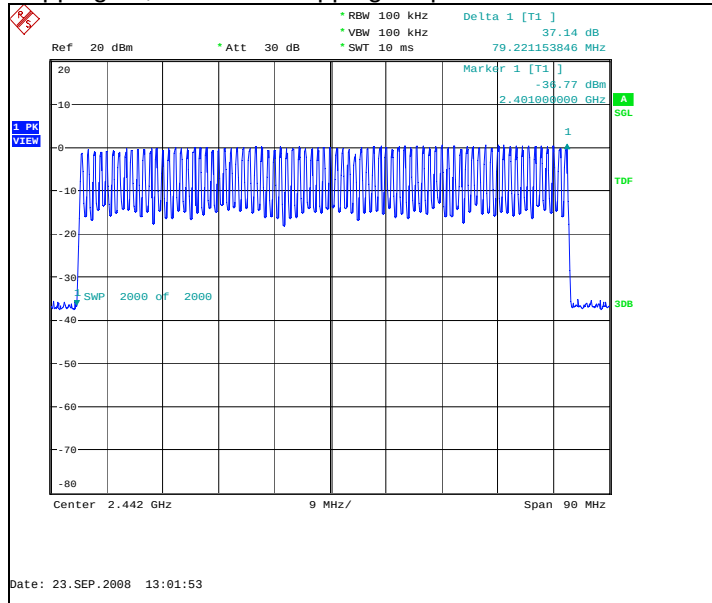

10.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
76	PASSED

Hopping on, number of hopping frequencies

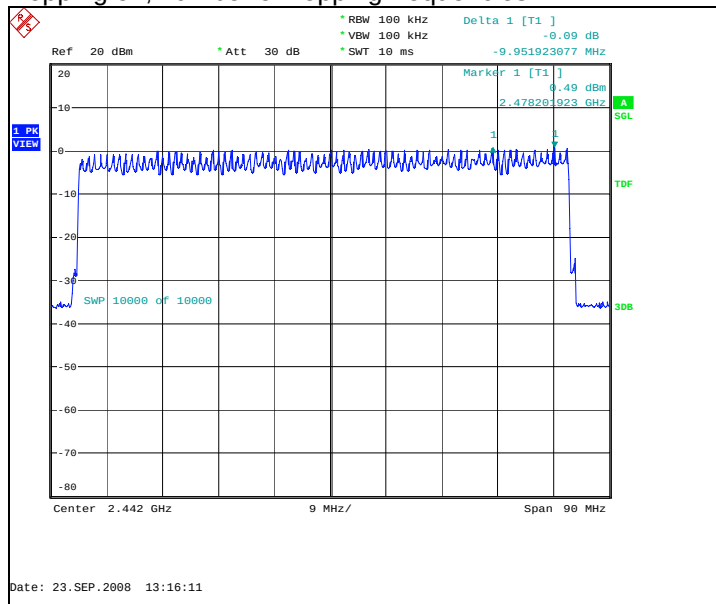

11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-449 DUT 41656
Accessories with DUT numbers	BP-4L DUT 41348 / AC-8E DUT 41662 / HS-125 DUT 41661
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 102.7
Date of measurements	23-Sep-2008
Measured by	Petteri Suni

11.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

11.2. Bluetooth test results

11.2.1 GFSK modulation, PRBS packet type


Measured number of transmissions	Duration of one transmission [μs]	Time of occupancy [s]	Result
99	2,917	0.288750	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

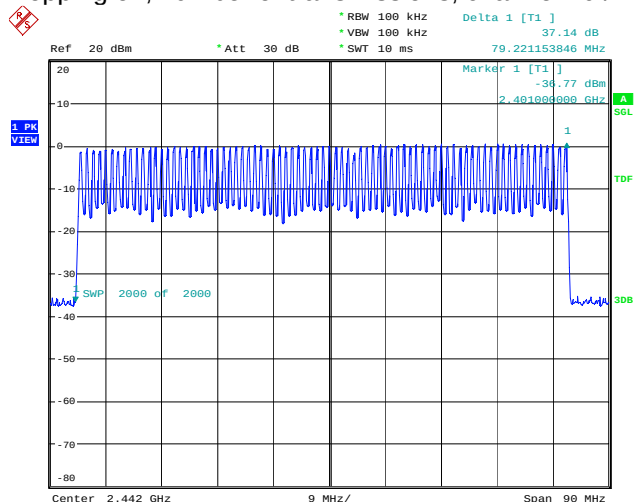

Date: 23.SEP.2008 13:01:53

Hopping on, duration of one transmission, channel 40 / 2442 MHz

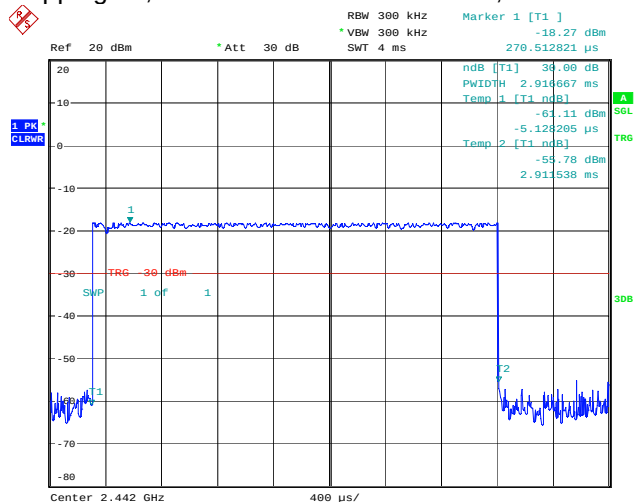


Date: 23.SEP.2008 13:03:01

11.2.2 8DPSK modulation, PRBS packet type


Measured number of transmissions	Duration of one transmission [μ s]	Time of occupancy [s]	Result
79	2,923	0.230923	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

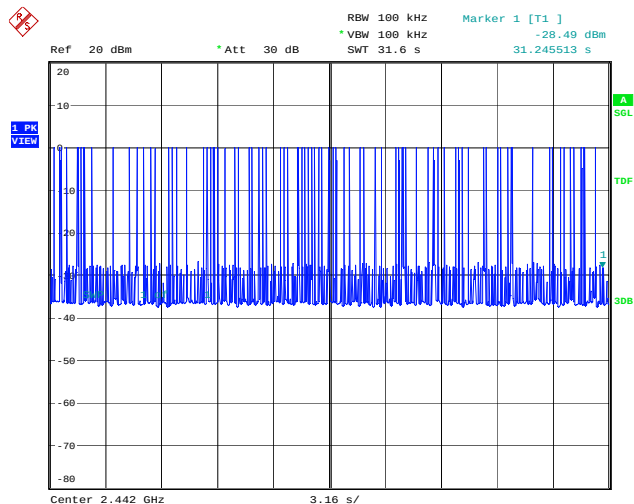

Date: 25.SEP.2008 10:28:06

Hopping on, duration of one transmission, channel 40 / 2442 MHz

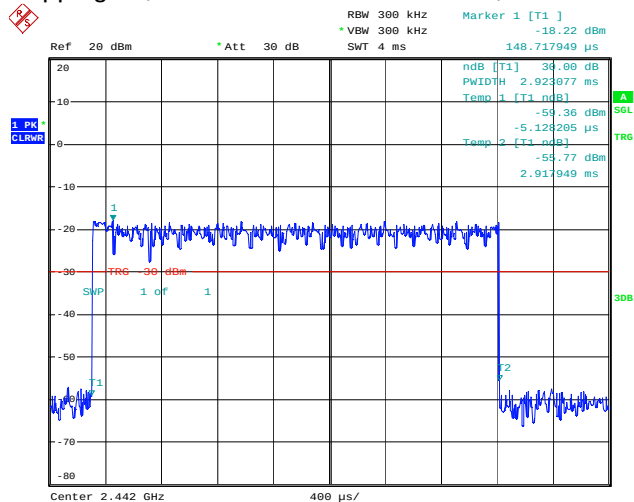

Date: 25.SEP.2008 10:28:16

12. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4))

EUT with DUT number	RM-449 DUT 41656
Accessories with DUT numbers	BP-4L DUT 41348 / AC-8E DUT 41662 / HS-125 DUT 41661
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 103.2
Date of measurements	25-Sep-2008
Measured by	Petteri Suni

12.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

12.2. WLAN Test results


12.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	P [dBm]	P [W]	Result
1 / 2412	20.15	0.104	PASSED
7 / 2442	20.02	0.100	PASSED
11 / 2462	20.34	0.110	PASSED


Channel 1 / 2412 MHz

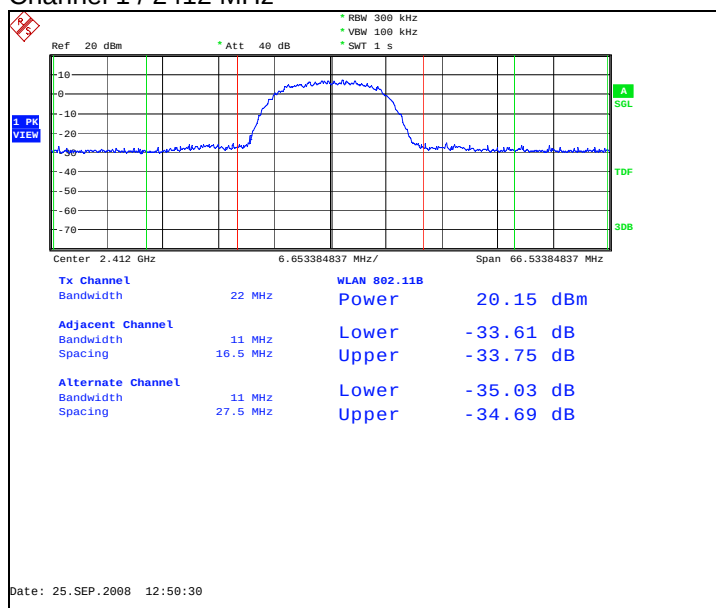

Channel 7 / 2442 MHz

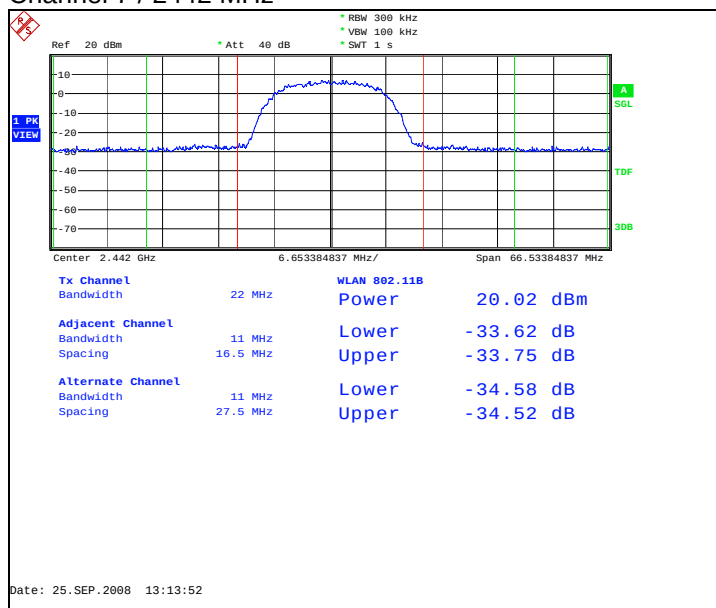


Channel 11 / 2462 MHz

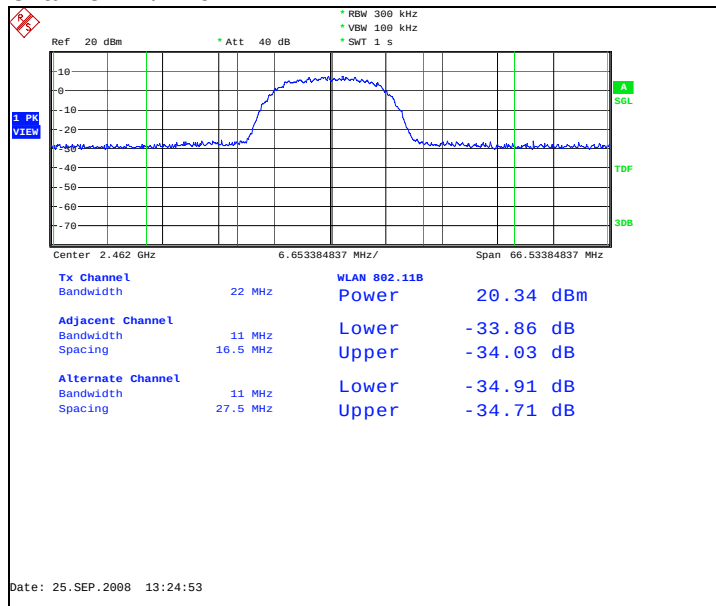


12.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f _c [MHz]	P [dBm]	P [W]	Result
1 / 2412	16.74	0.047	PASSED
7 / 2442	16.27	0.042	PASSED
11 / 2462	16.81	0.048	PASSED


Channel 1 / 2412 MHz

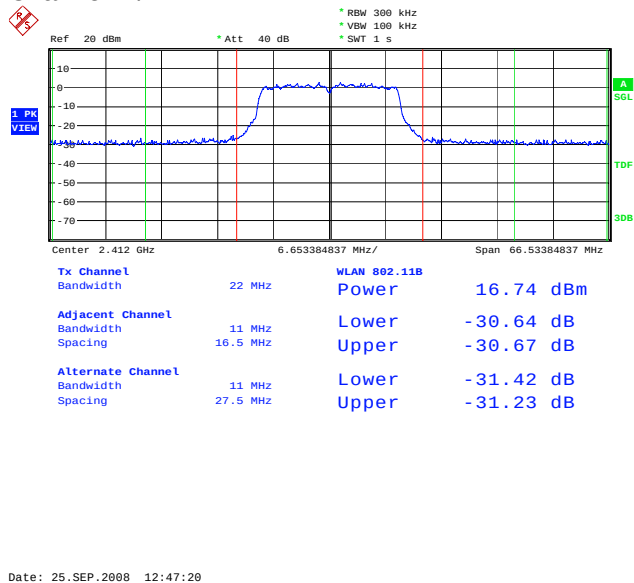

Channel 7 / 2442 MHz

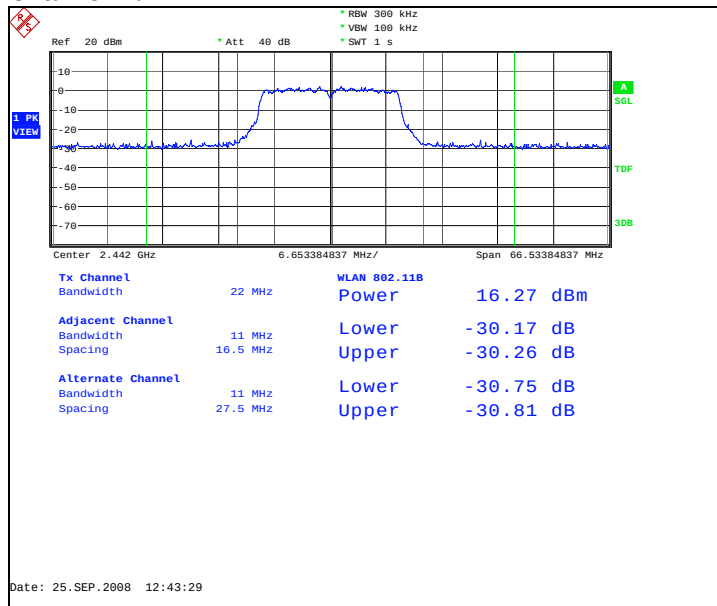

Channel 11 / 2462 MHz

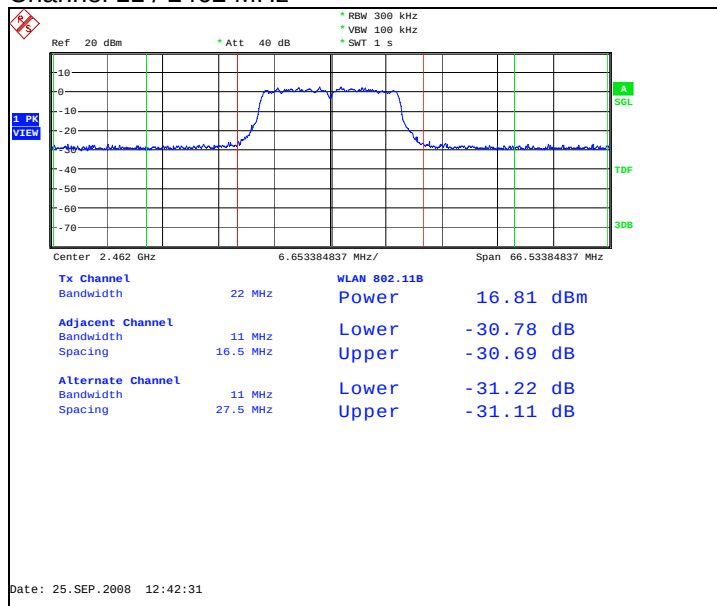

13. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-449 DUT 41656
Accessories with DUT numbers	BP-4L DUT 41348 / AC-8E DUT 41662 / HS-125 DUT 41661
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 103.2
Date of measurements	25-Sep-2008
Measured by	Petteri Suni

13.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

13.2. WLAN Test results

13.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate


Channel 1 / 2412 MHz

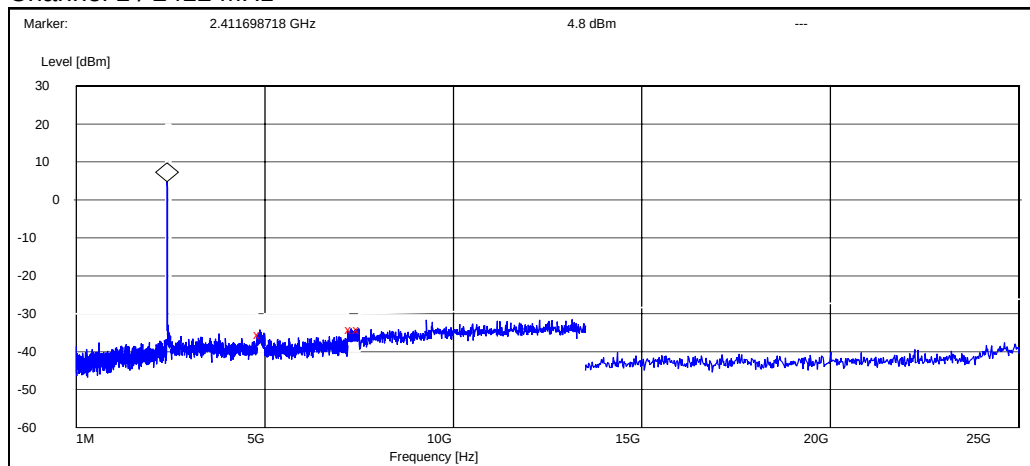

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4862.500000	-40.297963	PASSED
7288.461538	-38.997963	PASSED
7500.000000	-38.997963	PASSED


Channel 7 / 2442 MHz

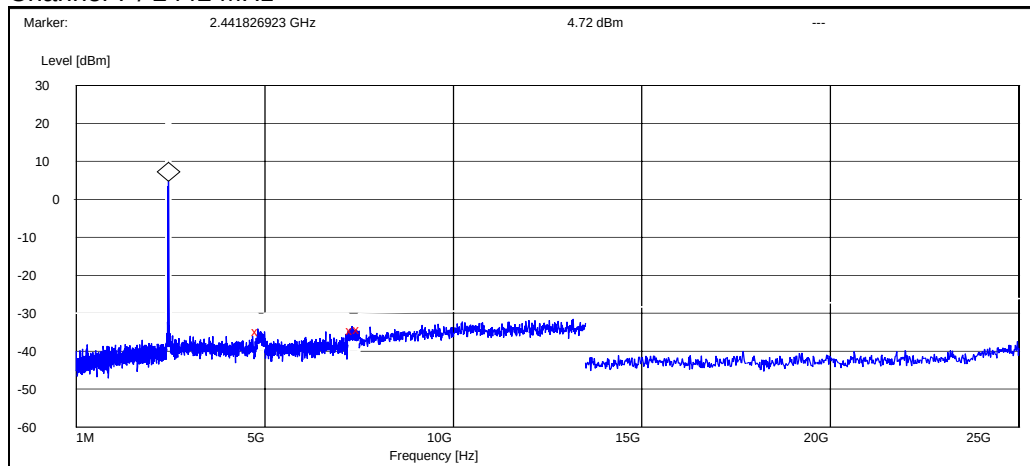

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4812.179487	-39.624485	PASSED
7318.269231	-39.124485	PASSED
7500.000000	-38.924485	PASSED

Channel 11 / 2462 MHz

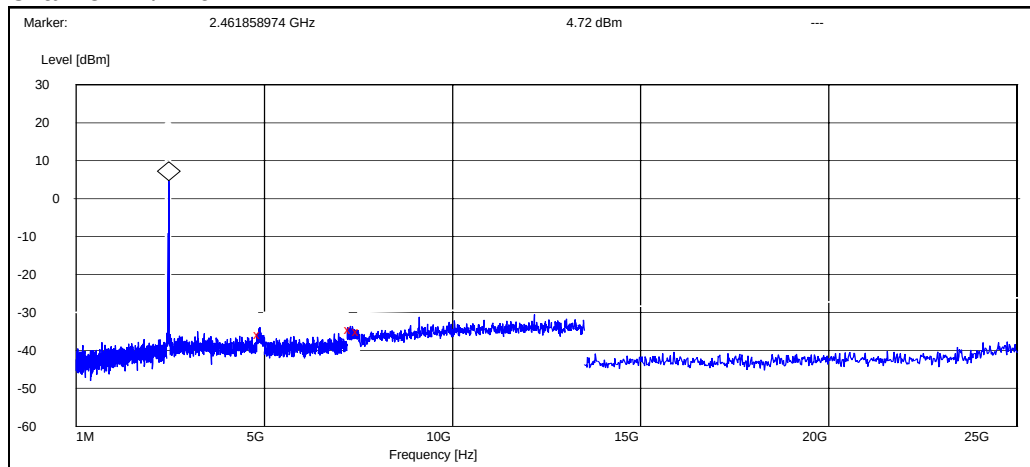


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4878.525641	-40.419342	PASSED
7285.096154	-39.119342	PASSED
7500.000000	-39.719342	PASSED

13.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate


Channel 1 / 2412 MHz

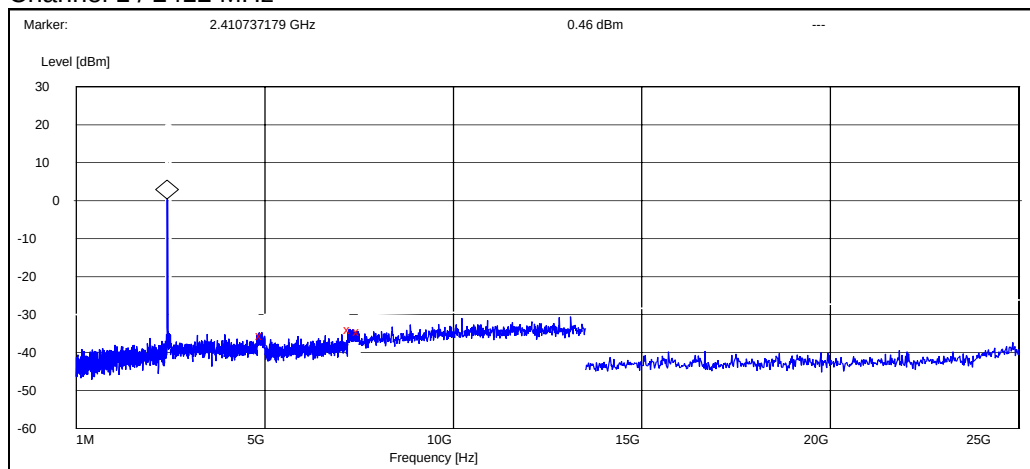

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4919.551282	-35.859935	PASSED
7252.403846	-34.359935	PASSED
7500.000000	-35.059935	PASSED


Channel 7 / 2442 MHz

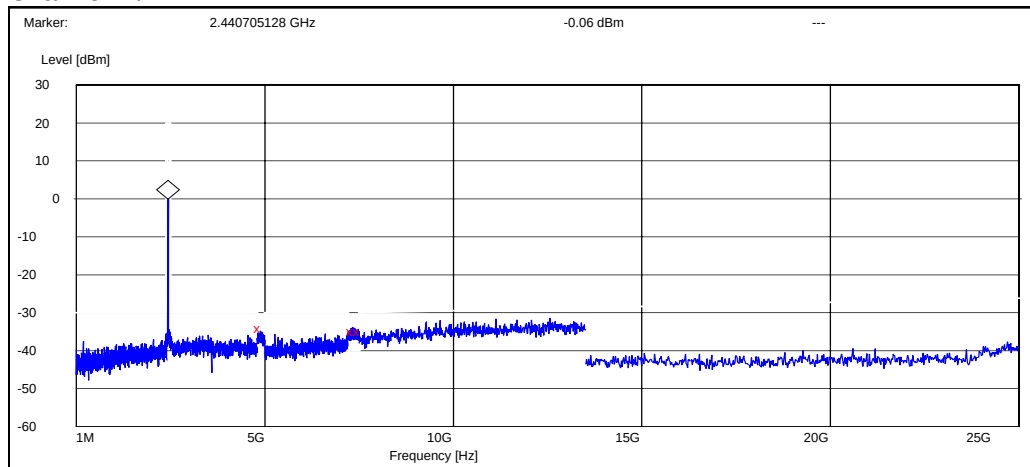

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4877.564103	-34.135123	PASSED
7327.403846	-34.835123	PASSED
7500.000000	-34.735123	PASSED

Channel 11 / 2462 MHz

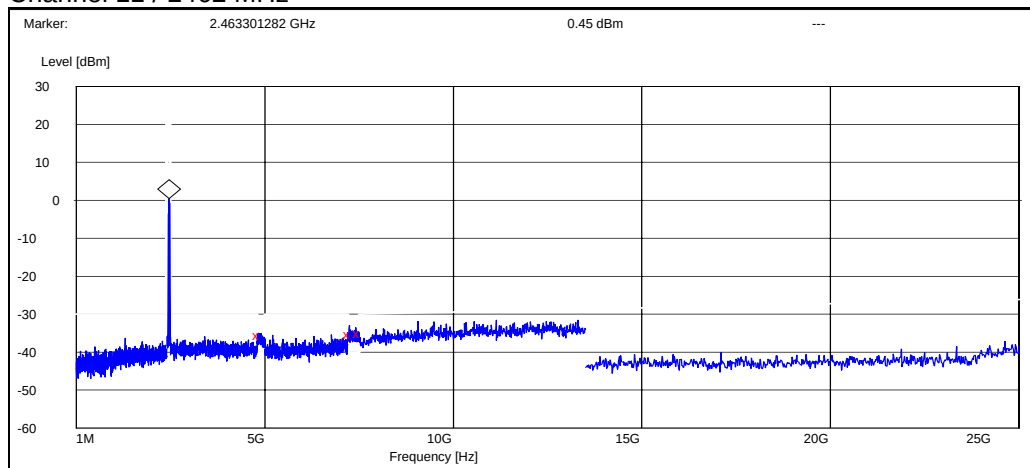

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4844.551282	-35.948270	PASSED
7248.076923	-35.848270	PASSED
7500.000000	-35.648270	PASSED

14. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-449 DUT 41660
Accessories with DUT numbers	BP-4L DUT 41658, AC-8E DUT 41659, HS-125 DUT 41657
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 48 / 102.8
Date of measurements	22-Sep-2008
Measured by	Jari Jantunen

14.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

14.2. WLAN Test results

14.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	40.40	104.71	42.40	-2.0	HORIZONTAL	PASSED
7236.000000	42.60	134.90	40.00	2.6	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	27.80	24.55	29.80	-2.0	HORIZONTAL	PASSED
7236.000000	29.40	29.51	26.80	2.6	HORIZONTAL	PASSED

Channel 7 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
37.895391	19.20	9.12	33.30	-14.1	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	42.00	125.89	44.40	-2.4	VERTICAL	PASSED
7284.075150	42.90	139.64	40.10	2.8	VERTICAL	PASSED
7285.569138	43.00	141.25	40.20	2.8	VERTICAL	PASSED
7405.315631	43.40	147.91	39.70	3.7	VERTICAL	PASSED
17989.971944	53.10	451.86	33.60	19.5	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	28.70	27.23	31.10	-2.4	VERTICAL	PASSED
7287.575150	29.90	31.26	27.10	2.8	VERTICAL	PASSED
7288.069138	29.80	30.90	27.00	2.8	VERTICAL	PASSED
7409.815631	30.40	33.11	26.70	3.7	VERTICAL	PASSED
17989.971944	40.50	105.93	21.00	19.5	HORIZONTAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	40.10	101.16	42.40	-2.3	VERTICAL	PASSED
7386.000000	42.90	139.64	39.50	3.4	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	28.70	27.23	31.00	-2.3	HORIZONTAL	PASSED
7386.000000	30.40	33.11	27.00	3.4	VERTICAL	PASSED

14.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	38.70	86.10	40.70	-2.0	VERTICAL	PASSED
7236.000000	41.90	124.45	39.30	2.6	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.000000	25.80	19.50	27.80	-2.0	HORIZONTAL	PASSED
7236.000000	29.30	29.17	26.70	2.6	VERTICAL	PASSED

Channel 7 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
38.135872	26.60	21.38	40.80	-14.2	VERTICAL	PASSED
74.869940	17.70	7.67	41.30	-23.6	VERTICAL	PASSED
74.948497	17.70	7.67	41.30	-23.6	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2367.069138	52.10	402.72	50.20	1.9	VERTICAL	PASSED
4880.769539	38.80	87.10	41.20	-2.4	HORIZONTAL	PASSED
4881.761523	39.30	92.26	41.70	-2.4	HORIZONTAL	PASSED
7285.065130	43.00	141.25	40.20	2.8	VERTICAL	PASSED
7296.093186	42.40	131.83	39.50	2.9	HORIZONTAL	PASSED
7420.841683	44.10	160.32	40.40	3.7	VERTICAL	PASSED
17920.835671	52.90	441.57	33.60	19.3	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
2370.069138	39.80	97.72	37.60	2.2	VERTICAL	PASSED
4883.269539	25.80	19.50	28.20	-2.4	HORIZONTAL	PASSED
4884.261523	25.90	19.72	28.30	-2.4	HORIZONTAL	PASSED
7282.065130	29.90	31.26	27.10	2.8	VERTICAL	PASSED
7298.093186	29.70	30.55	26.80	2.9	HORIZONTAL	PASSED
7423.341683	30.30	32.73	26.60	3.7	VERTICAL	PASSED
17917.335671	40.20	102.33	20.90	19.3	HORIZONTAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	39.20	91.20	41.50	-2.3	VERTICAL	PASSED
7386.000000	43.00	141.25	39.60	3.4	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924.000000	26.50	21.13	28.80	-2.3	HORIZONTAL	PASSED
7386.000000	30.20	32.36	26.80	3.4	VERTICAL	PASSED

15. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-449 DUT 41660
Accessories with DUT numbers	BP-4L DUT 41658, AC-8E DUT 41659, HS-125 DUT 41657
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 41 / 103.0
Date of measurements	18-Sep-2008
Measured by	Jari Jantunen

15.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

15.2. WLAN Test results

15.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 7 / 2442 MHz

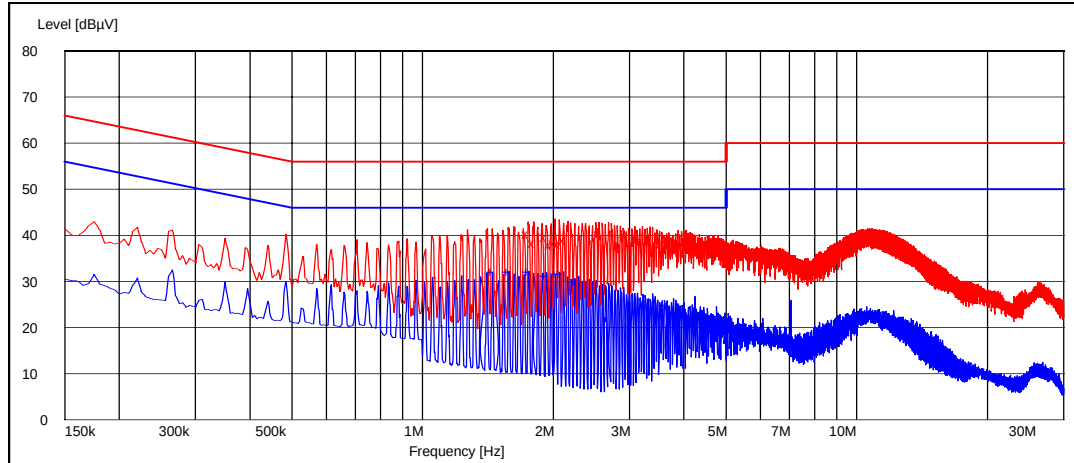

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
1.750000	40.40	L1	PASSED
1.805000	38.40	N	PASSED
1.930000	39.70	L1	PASSED
1.980000	37.80	N	PASSED
2.025000	38.40	L1	PASSED
2.070000	38.00	L1	PASSED
2.130000	39.00	N	PASSED
2.560000	40.30	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
1.450000	32.00	L1	PASSED
1.580000	32.00	L1	PASSED
1.755000	32.00	L1	PASSED
1.930000	31.20	L1	PASSED
2.035000	31.50	L1	PASSED
2.080000	31.70	L1	PASSED
2.255000	30.00	L1	PASSED

15.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel 7 / 2442 MHz

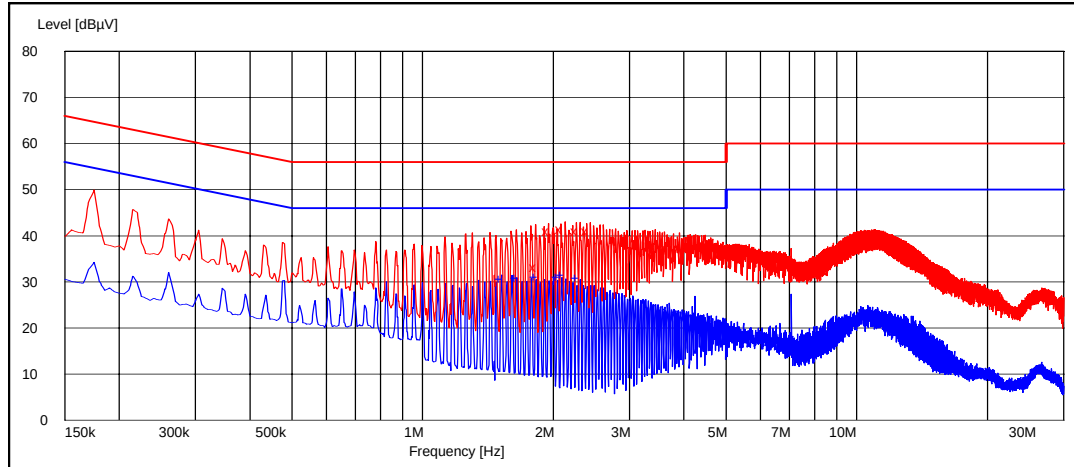

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
1.820000	33.10	N	PASSED
1.950000	41.10	L1	PASSED
2.095000	41.50	L1	PASSED
2.270000	41.10	L1	PASSED
2.400000	41.00	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
1.520000	30.50	L1	PASSED
1.650000	30.80	L1	PASSED
1.825000	31.00	L1	PASSED
2.055000	31.10	L1	PASSED
2.100000	31.60	L1	PASSED
2.275000	30.80	L1	PASSED

16. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (1))

EUT with DUT number	RM-449 DUT 41656
Accessories with DUT numbers	BP-4L DUT 41348 / AC-8E DUT 41662 / HS-125 DUT 41661
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 103.2
Date of measurements	25-Sep-2008
Measured by	Petteri Suni

16.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for 6 dB bandwidth measurements


Limit [kHz]
≥ 500

16.2. WLAN test results


16.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	6 dB bandwidth [kHz]	Result
1	12179.487	PASSED
7	12419.872	PASSED
11	12419.872	PASSED

Channel 1 / 2412 MHz

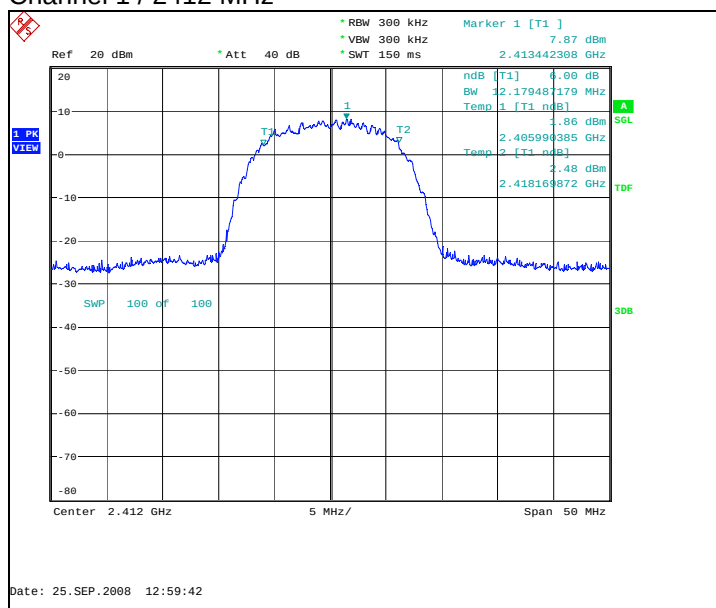

Channel 7 / 2442 MHz

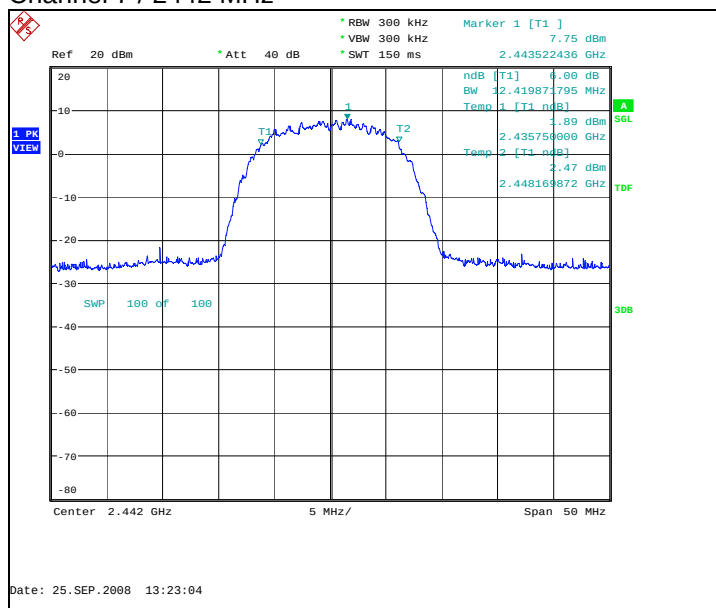

Ref 20 dBm * Att 40 dB

1 PK VIEW

SWP 100 of 100

Center 2.462 GHz 5 MHz/ Span 50 MHz

Marker 1 [T1] 8.05 dBm
2.463522436 GHz

ndB [T1] 6.00 dB
BW 2.419873795 MHz
Temp 1 [T1 ndB] 2.07 dBm
2.455750000 GHz
Temp 2 [T1 ndB] 2.95 dBm
2.468169872 GHz

T1 T2

1

1A SGL

TDF


3DB

Date: 25.SEP.2008 13:34:05


Channel / f_c [MHz]	6 dB bandwidth [kHz]	Result
1	16426.282	PASSED
7	16426.282	PASSED
11	16426.282	PASSED

[illegible]

Channel 7 / 2442 MHz

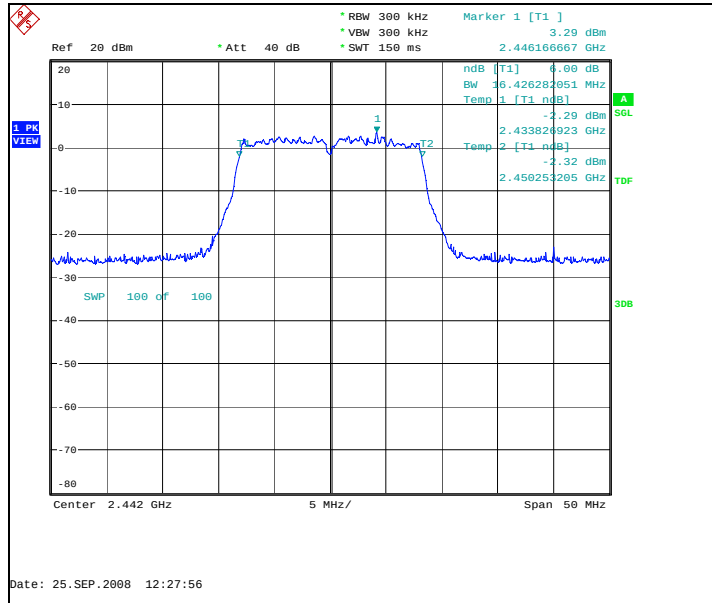

Channel 11 / 2462 MHz

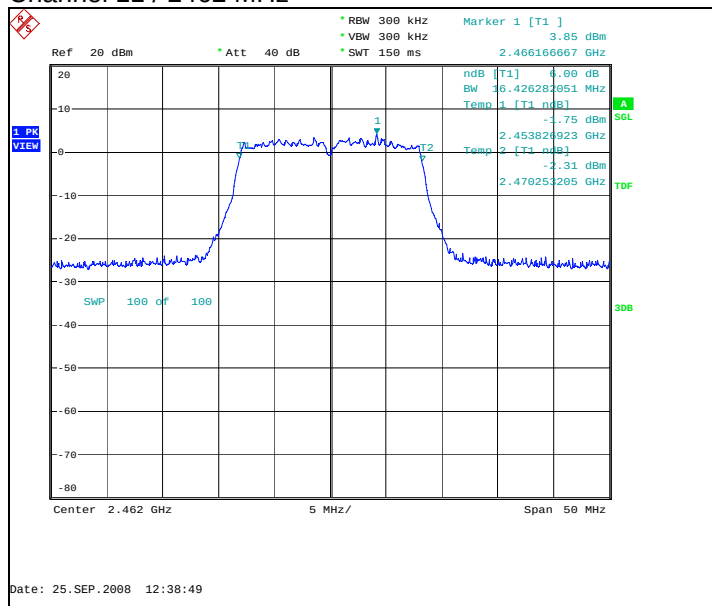

17. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (2))

EUT with DUT number	RM-449 DUT 41656
Accessories with DUT numbers	BP-4L DUT 41348 / AC-8E DUT 41662 / HS-125 DUT 41661
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 103.2
Date of measurements	25-Sep-2008
Measured by	Petteri Suni

17.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for power spectral density measurements


Limit [dBm] @ 3 kHz
≤ 8

17.2. WLAN test results


17.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-8.98	PASSED
7 / 2442	-9.01	PASSED
11 / 2462	-8.77	PASSED


Channel 1 / 2412 MHz

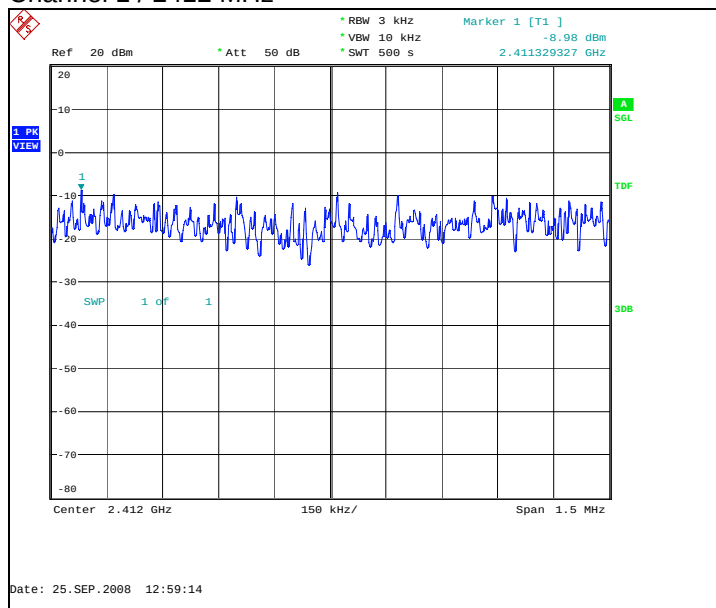

Channel 7 / 2442 MHz

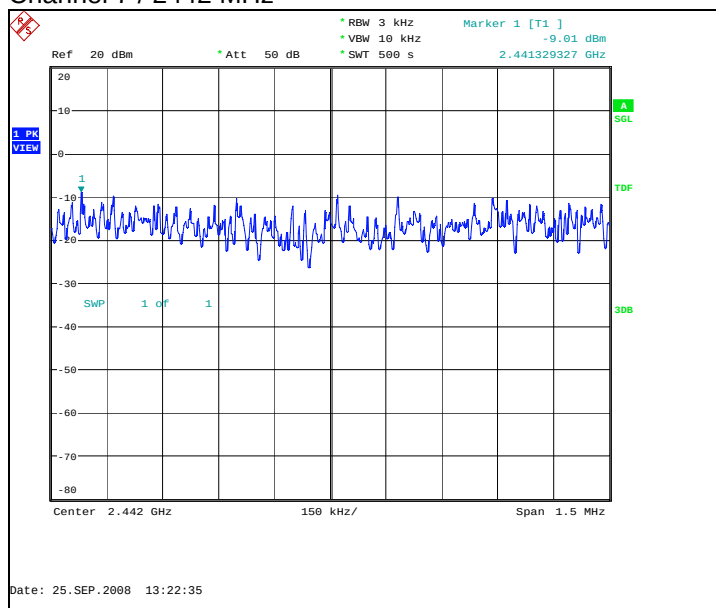


Channel 11 / 2462 MHz

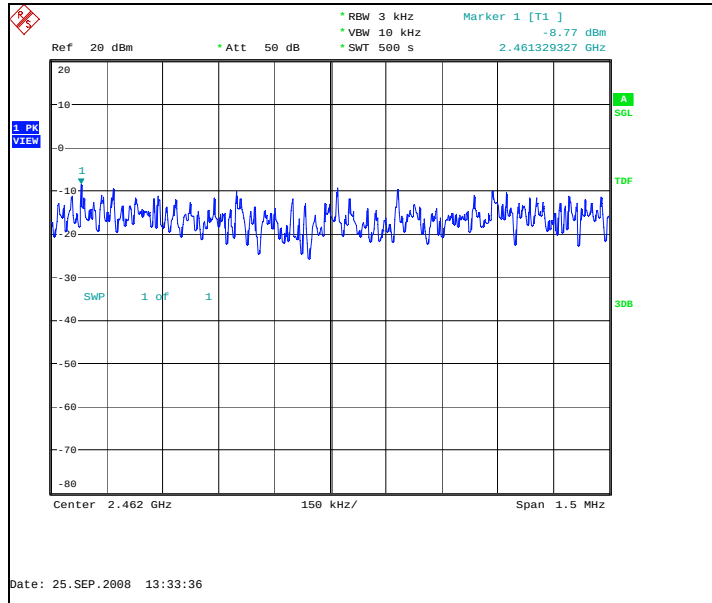


17.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-16.46	PASSED
7 / 2442	-16.67	PASSED
11 / 2462	-16.24	PASSED


Channel 1 / 2412 MHz

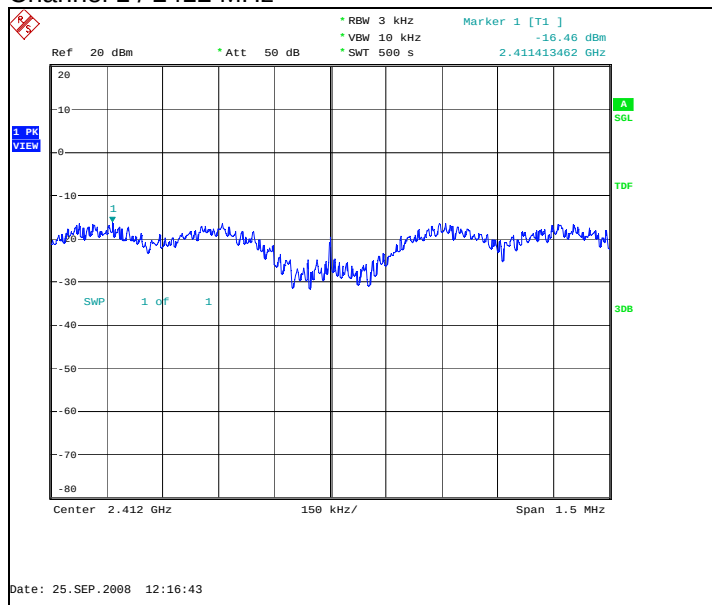

Channel 7 / 2442 MHz

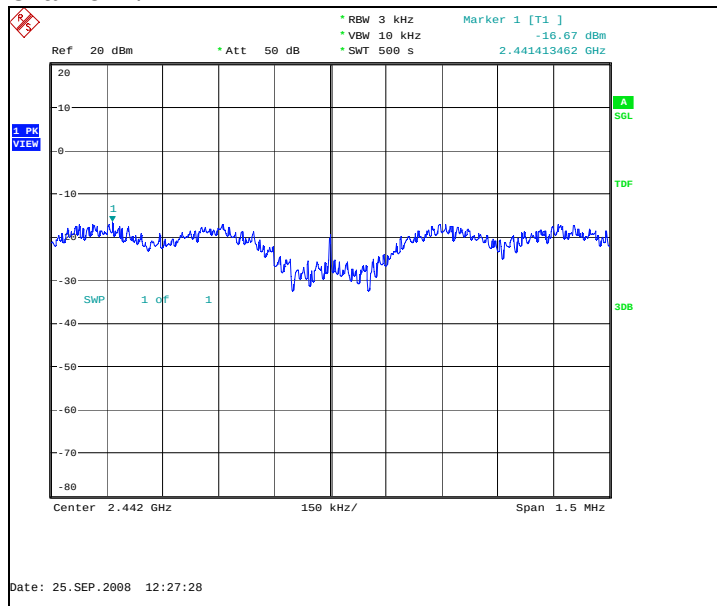

Channel 11 / 2462 MHz

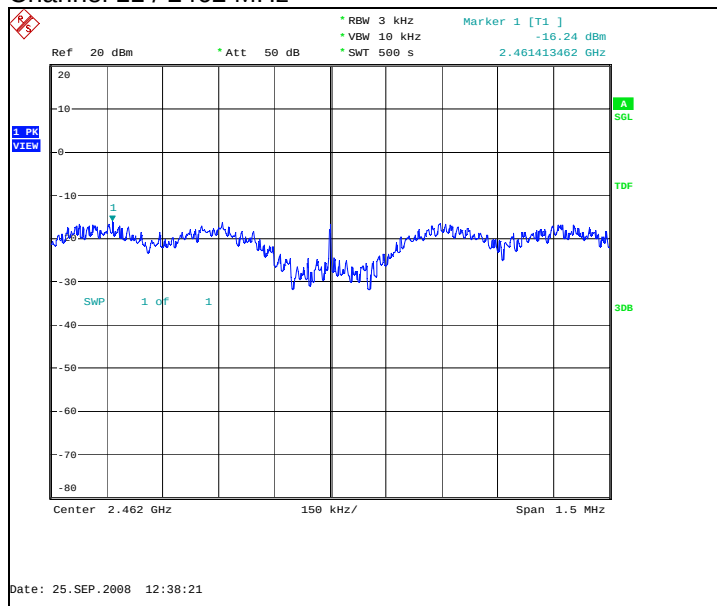

18. Test Equipment

18.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30597	Power splitter	11667A	Agilent	22/24/27, 15C
TM37499	Power splitter	11667A	Agilent	22/24/27, 15C
TM38111	Multimeter	34401A	Agilent	22/24/27, 15C
TM38112	DC power supply	6632A	Agilent	22/24/27, 15C
TM22901	Attenuator	8496A	Agilent	22/24/27, 15C
TM30636	Artificial mains net	L2-16	PMM	15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum analyzer	FSU	R&S	22/24/27, 15C
TM22835	Multimeter	87	Fluke	15C, 15B
TM37500	Microwave switch system	7116-MSW	Keithley	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
	Temperature chamber	VT4002	Vötsch	22/24/27, 15C
2058	EMI Test receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

18.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24/27, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24/27, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24/27, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24/27, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24/27, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24/27, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24/27
TM37502	Dipole antenna	3125-1880	EMCO	22/24/27
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24/27
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24/27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Mast/Turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24/27, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24/27, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
TM23892	Yaesu controller	G-1000SDX	Yaesu	22/24/27, 15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B