

FCC Part 15C Compliance Test Report

Test Report no.:	Tre_FCC_0851_08.doc	Date of Report:	03-Feb-2009
Number of pages:	25	Customer's Contact person:	Kari O. Koskela
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O. Box 86 Joensuunkatu 7 FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 44277
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	Phone RM-465 / Battery BL-4U, Headset HS-43, AC-Charger AC-8E		
FCC ID:	PYARM-465	IC:	661V-RM465
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Petteri Suni, Test System Manager

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	16-Dec-2008
Testing completed	22-Dec-2008
The customer's contact person	Kari O. Koskela
Test Plan referred to	T:\Projects\RM-465\TestPlan_RS\RS_Testplan_RM-465.xls
Notes	
Document name	T:\Projects\RM-465\EMC\Results\FCC\Tre_FCC_0851_08.doc

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900 and WCDMA Band I/II(1900)/VIII) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-465	004401104690967	0201	-	008.44.0	41740
Battery	BL-4U (LG)	-	2.0	-	-	41741
AC-Charger	AC-8E	-	-	-	-	41744
Headset	HS-43	-	-	-	-	41497
Dummy Battery	SD-37B	-	-	-	-	41580

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	NP
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(2)	A8.2 (1)	6 dB bandwidth	PASSED
15.247(e)	A8.2 (2)	Power spectral density	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP


The test was not performed by the TCC Nokia Tampere Laboratory.

CONTENTS


1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	4
2.1. Conducted RF test setup	4
2.2. AC powerline conducted emissions test setup.....	4
2.3. Radiated test setup	4
3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4))	5
3.1. Test method and limit.....	5
3.2. WLAN Test results	6
4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5).....	9
4.1. Test method and limit.....	9
4.2. WLAN Test results	10
5. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	13
5.1. Test method and limit.....	13
5.2. WLAN Test results	14
6. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (1))	16
6.1. Test method and limit.....	16
6.2. WLAN test results	17
7. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (2))	20
7.1. Test method and limit.....	20
7.2. WLAN test results	21
8. Test Equipment.....	24
8.1. Conducted measurements	24
8.2. Radiated measurements	24

2. Test setups


2.1. Conducted RF test setup

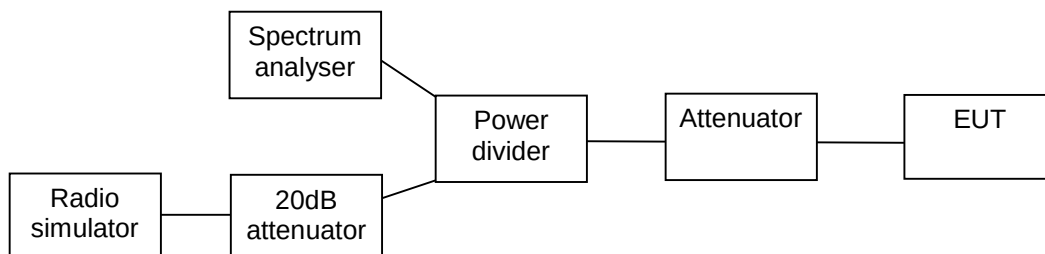

2.2. AC powerline conducted emissions test setup



2.3. Radiated test setup

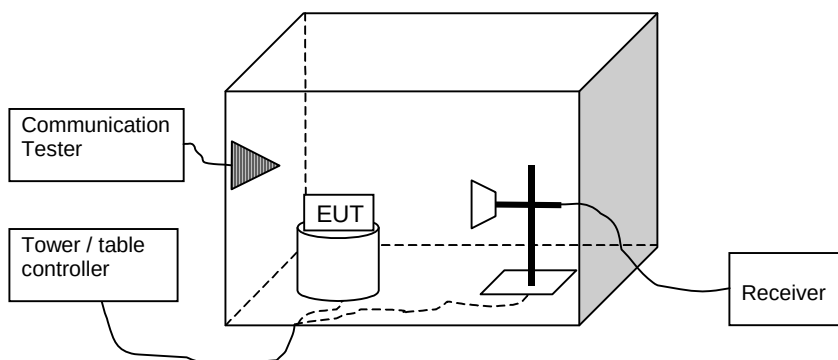

3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (4))

EUT with DUT number	RM-465 DUT 41470
Accessories with DUT numbers	BL-4U DUT 41741 / AC-8E DUT 41744 / HS-43 DUT 41497
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 100.9
Date of measurements	19-Dec-2008
Measured by	Petteri Suni

3.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. WLAN Test results


3.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	P [dBm]	P [W]	Result
1 / 2412	23.31	0.214	PASSED
7 / 2442	23.65	0.232	PASSED
11 / 2462	23.68	0.233	PASSED


Channel 1 / 2412 MHz

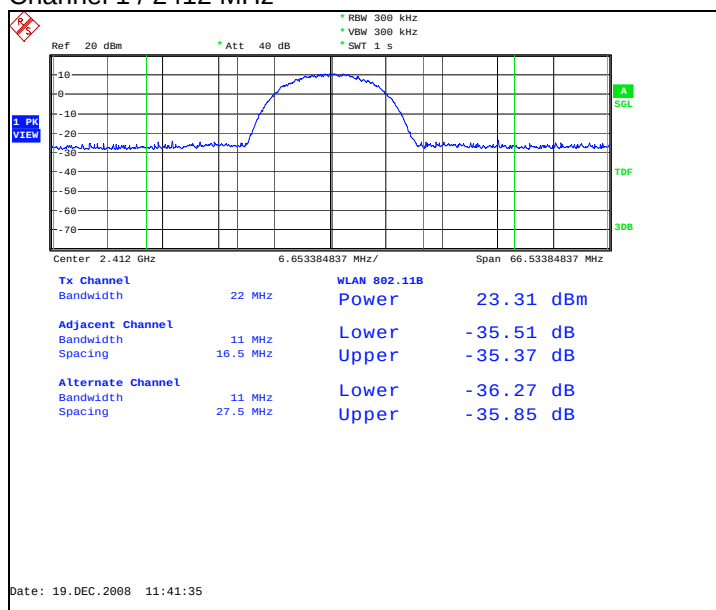

Channel 7 / 2442 MHz

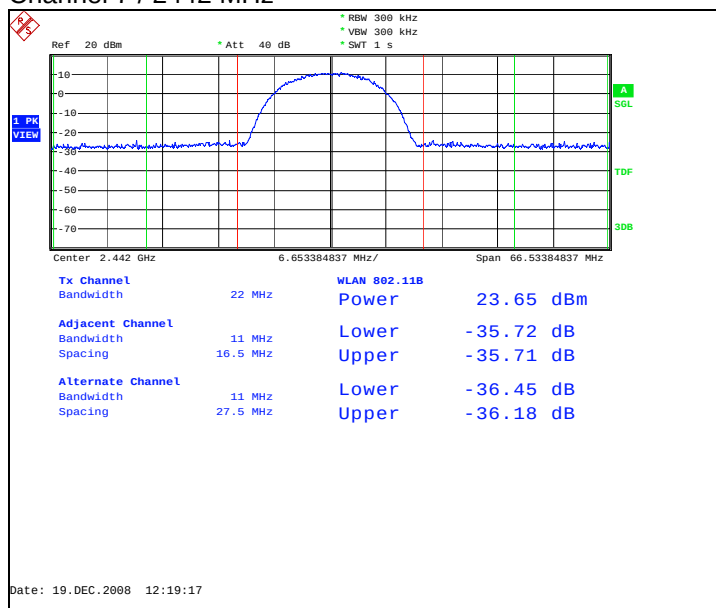


Channel 11 / 2462 MHz

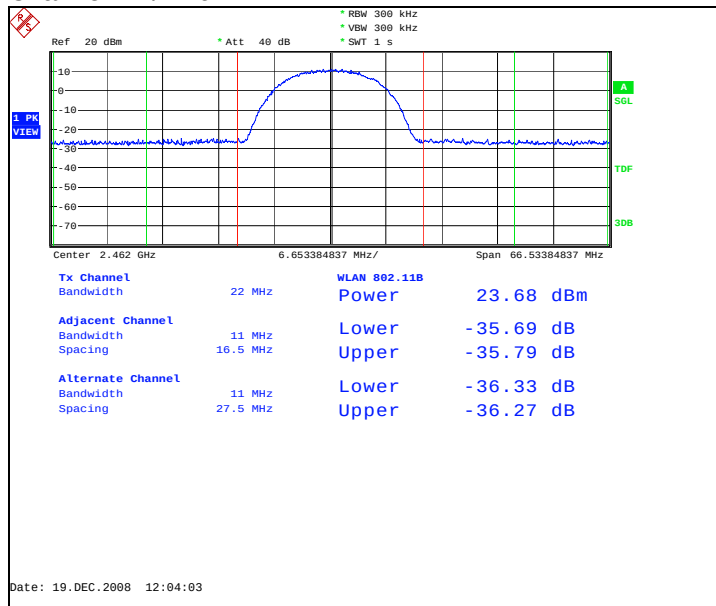


3.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f _c [MHz]	P [dBm]	P [W]	Result
1 / 2412	18.61	0.073	PASSED
7 / 2442	20.51	0.112	PASSED
11 / 2462	19.29	0.085	PASSED


Channel 1 / 2412 MHz

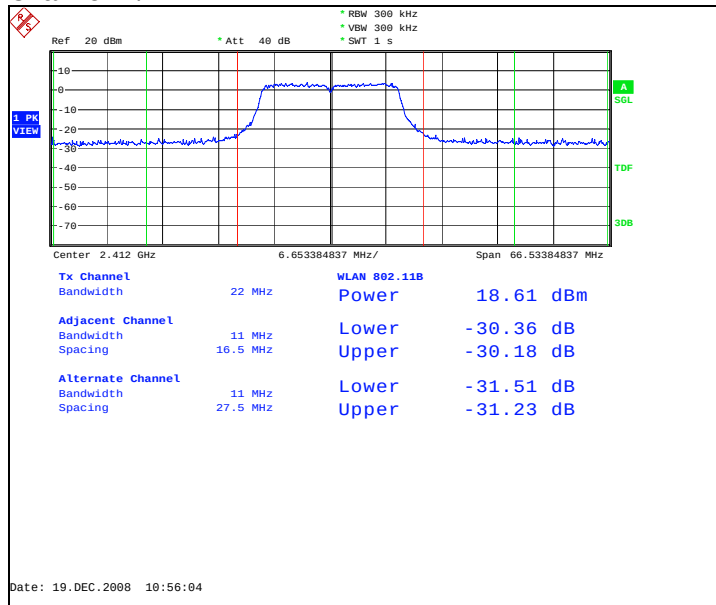

Channel 7 / 2442 MHz

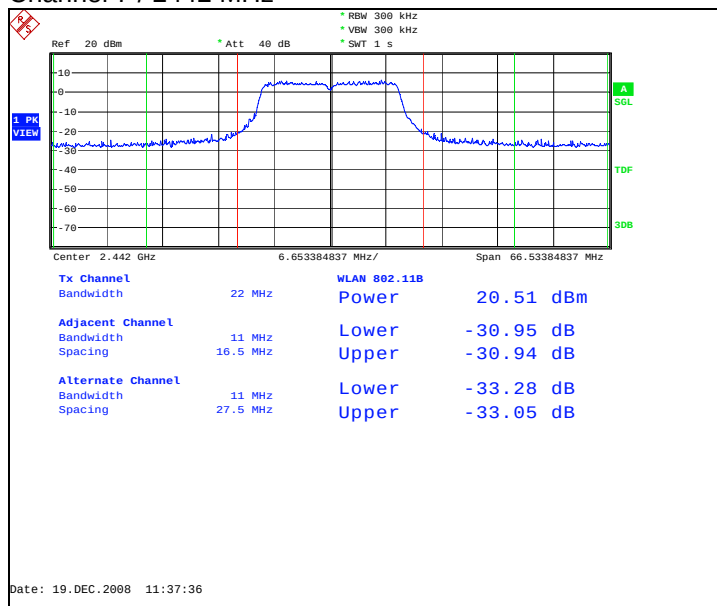

Channel 11 / 2462 MHz

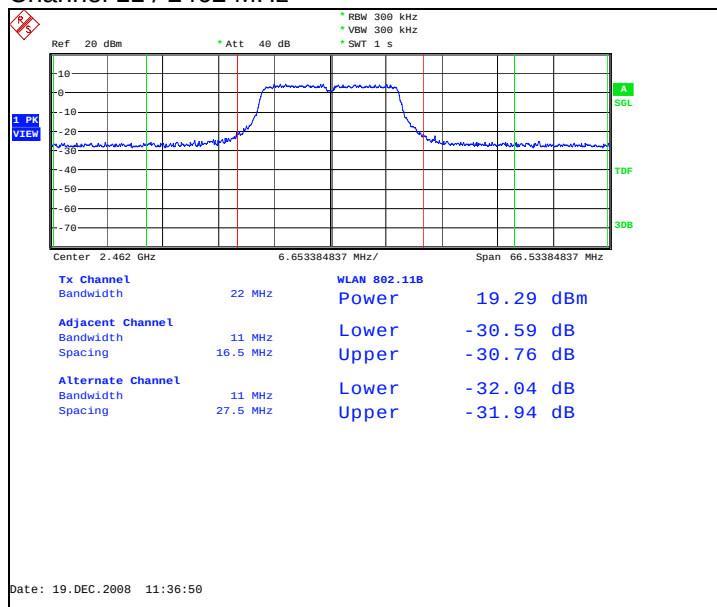

4. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-465 DUT 41470
Accessories with DUT numbers	BL-4U DUT 41741 / AC-8E DUT 41744 / HS-43 DUT 41497
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 100.9
Date of measurements	19-Dec-2008
Measured by	Petteri Suni

4.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

4.2. WLAN Test results

4.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate


Channel 1 / 2412 MHz

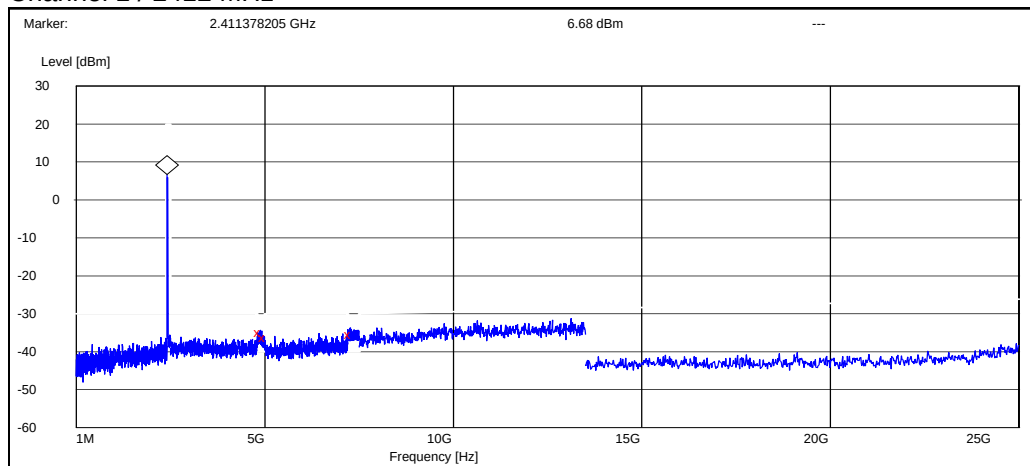

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4873.717949	-41.578883	PASSED
5000.000000	-42.878883	PASSED
7267.307692	-41.978883	PASSED


Channel 7 / 2442 MHz

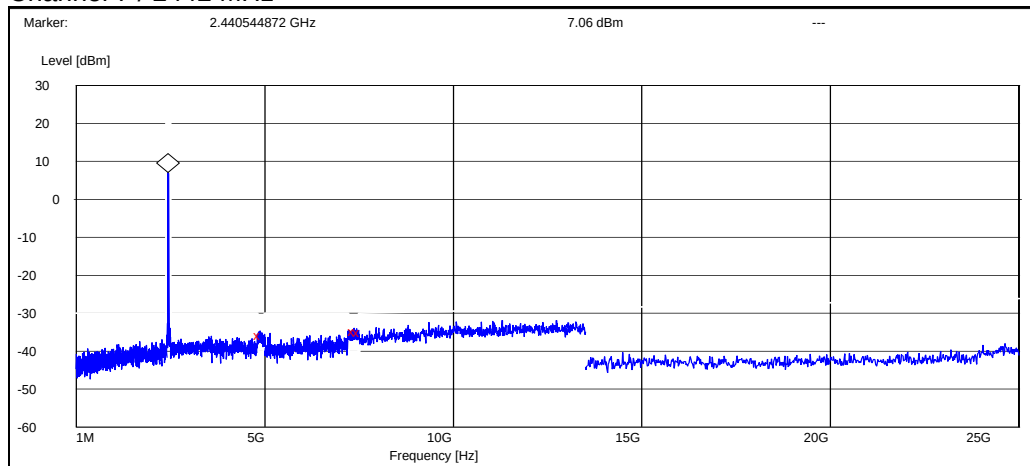

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4867.628205	-42.856463	PASSED
7364.423077	-41.756463	PASSED
7500.000000	-42.056463	PASSED

Channel 11 / 2462 MHz

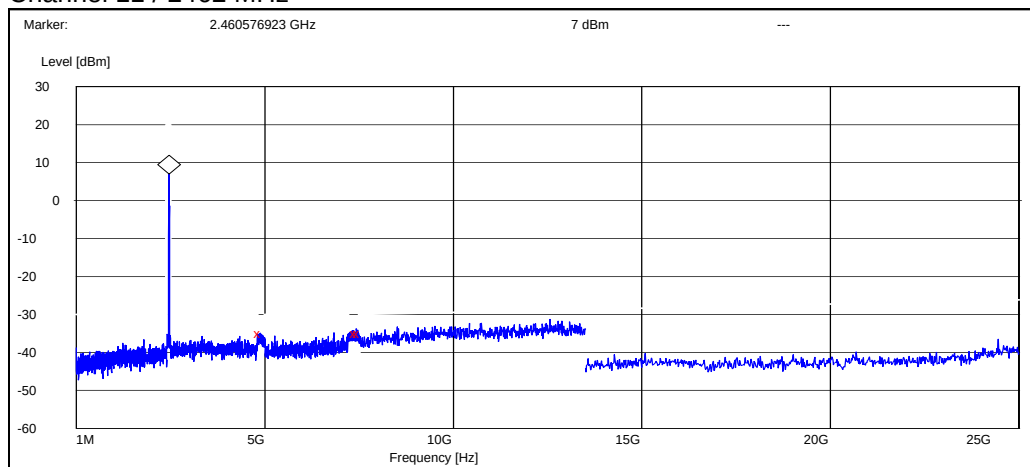


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4874.038462	-41.899227	PASSED
7425.000000	-42.099227	PASSED
7500.000000	-41.899227	PASSED

4.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate


Channel 1 / 2412 MHz

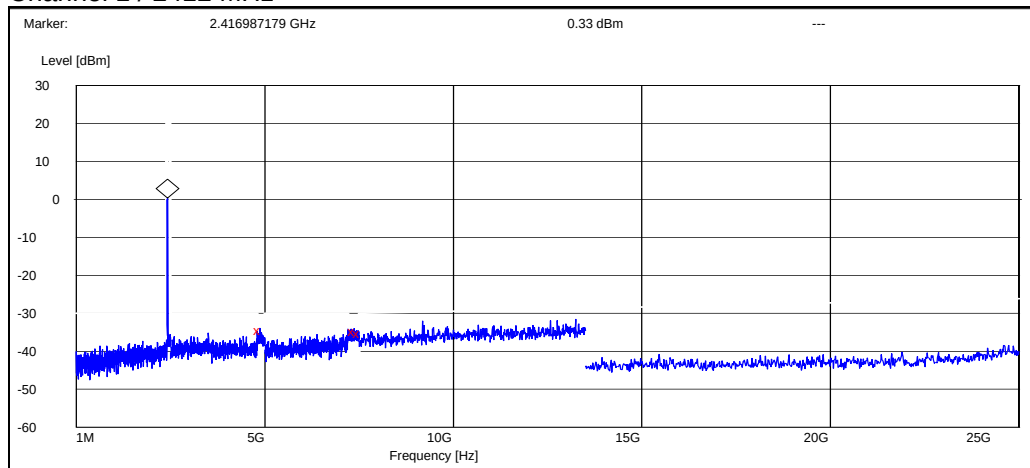

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4866.346154	-34.930420	PASSED
7364.423077	-35.030420	PASSED
7500.000000	-35.530420	PASSED


Channel 7 / 2442 MHz

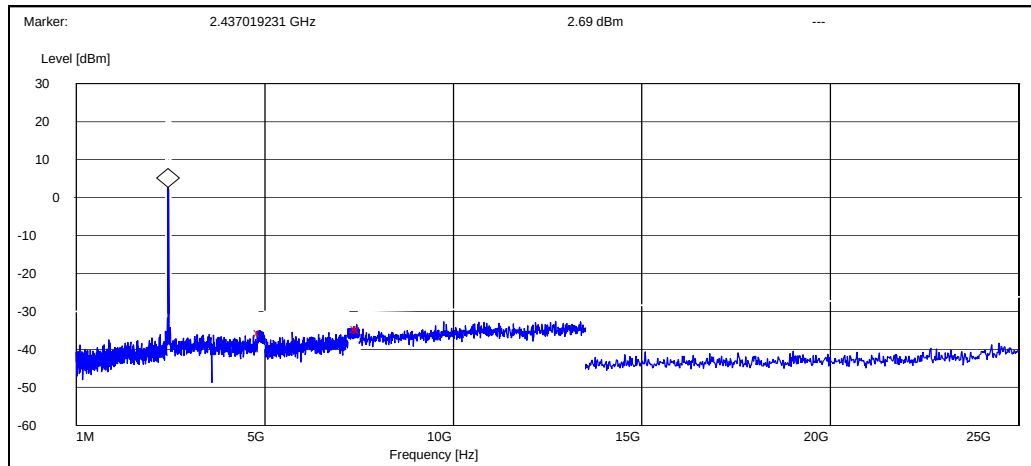

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4871.794872	-38.187178	PASSED
7440.865385	-37.187178	PASSED
7500.000000	-37.487178	PASSED

Channel 11 / 2462 MHz

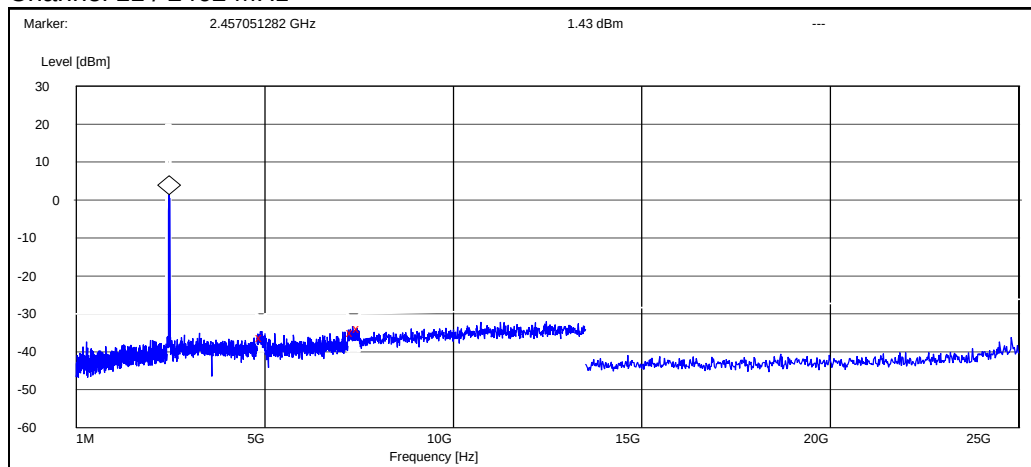

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4922.115385	-37.631273	PASSED
7330.288462	-36.331273	PASSED
7500.000000	-35.331273	PASSED

5. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-465 DUT 41749
Accessories with DUT numbers	BL-4U DUT 41741 / AC-8E DUT 41744 / HS-43 DUT 41497
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 49 / 98.8
Date of measurements	22-Dec-2008
Measured by	Jari Jantunen

5.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

5.2. WLAN Test results

5.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel 7 / 2442 MHz

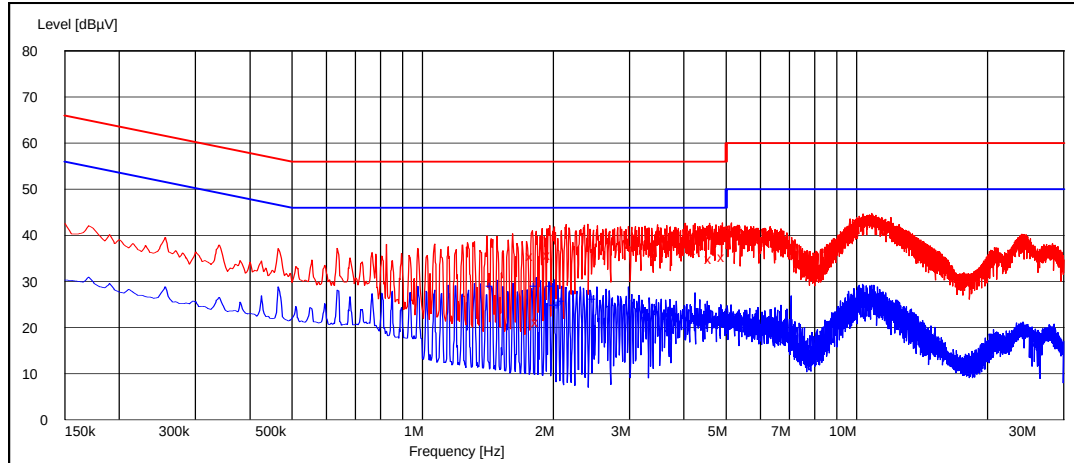

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
1.790000	35.50	L1	PASSED
1.850000	21.20	N	PASSED
1.960000	35.70	L1	PASSED
4.015000	37.00	L1	PASSED
4.240000	36.80	L1	PASSED
4.620000	34.90	L1	PASSED
4.955000	35.30	N	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
1.445000	29.00	L1	PASSED
1.825000	29.10	L1	PASSED
1.995000	29.10	L1	PASSED
2.025000	24.90	L1	PASSED
2.065000	24.80	L1	PASSED
2.105000	25.70	L1	PASSED
2.490000	26.20	L1	PASSED

5.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel 7 / 2442 MHz

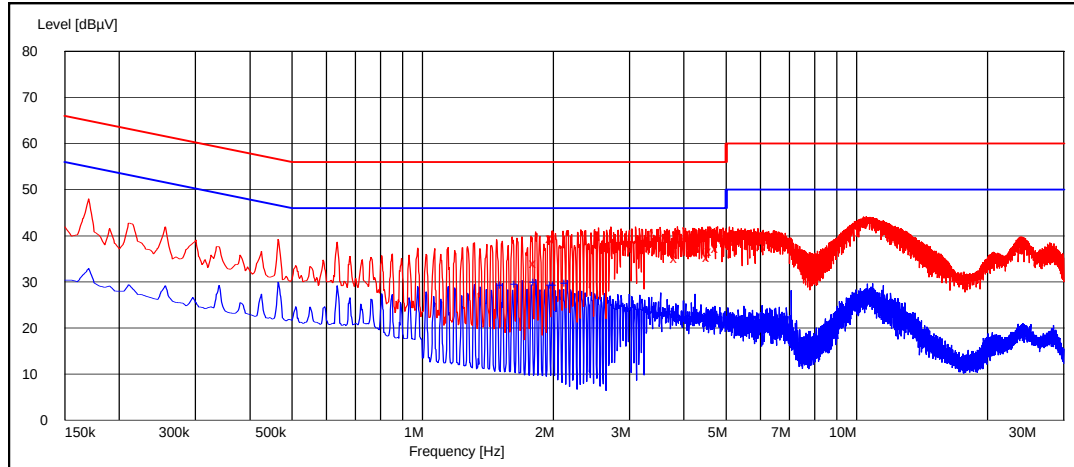

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
1.820000	34.10	N	PASSED
1.990000	39.50	L1	PASSED
3.850000	35.10	L1	PASSED
4.570000	35.50	L1	PASSED
4.615000	36.70	L1	PASSED
4.785000	37.20	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
1.525000	29.40	L1	PASSED
1.650000	29.60	L1	PASSED
1.820000	29.90	L1	PASSED
1.990000	29.30	L1	PASSED
2.025000	29.30	L1	PASSED
2.150000	29.80	L1	PASSED

6. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (1))

EUT with DUT number	RM-465 DUT 41470
Accessories with DUT numbers	BL-4U DUT 41741 / AC-8E DUT 41744 / HS-43 DUT 41497
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 100.9
Date of measurements	19-Dec-2008
Measured by	Petteri Suni

6.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for 6 dB bandwidth measurements


Limit [kHz]
≥ 500

6.2. WLAN test results


6.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	6 dB bandwidth [kHz]	Result
1	10737.179	PASSED
7	10897.436	PASSED
11	10817.308	PASSED


Channel 1 / 2412 MHz

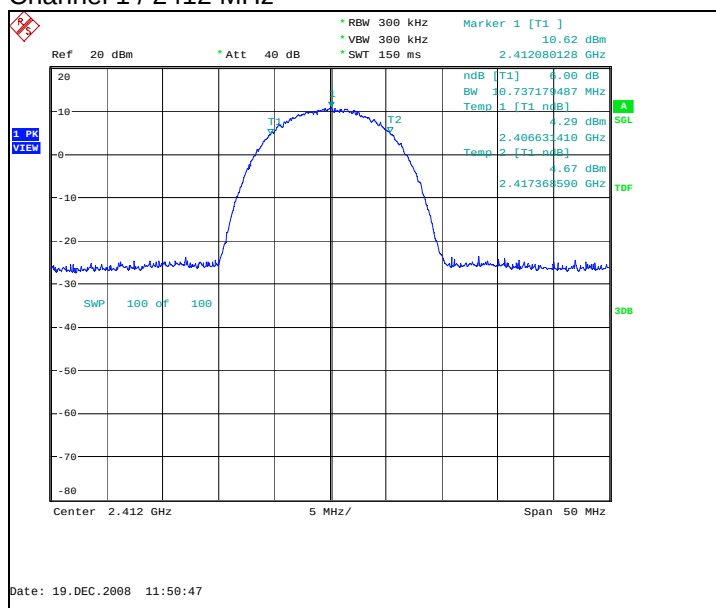

Channel 7 / 2442 MHz

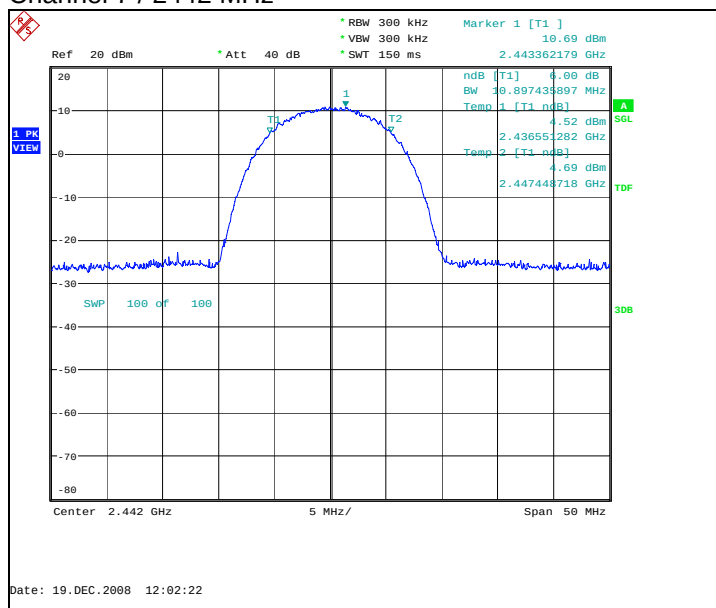


Channel 11 / 2462 MHz

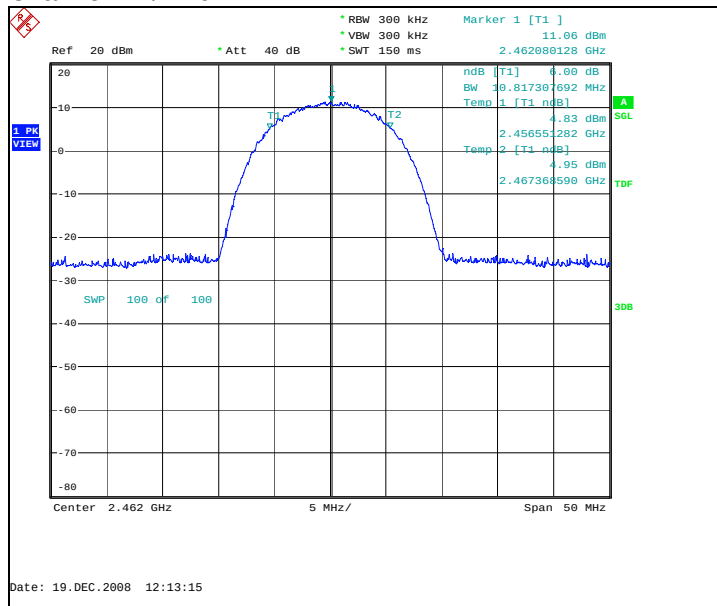


6.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f_c [MHz]	6 dB bandwidth [kHz]	Result
1	16506.410	PASSED
7	16506.410	PASSED
11	16506.410	PASSED


Channel 1 / 2412 MHz

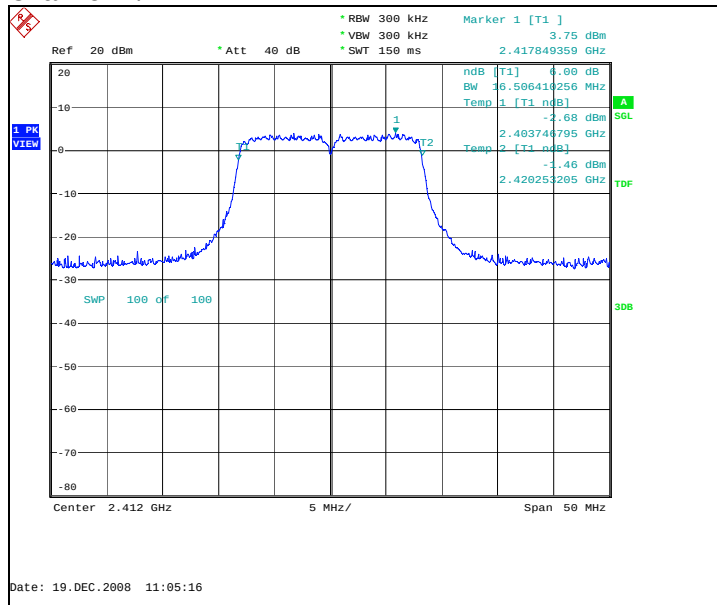

Channel 7 / 2442 MHz

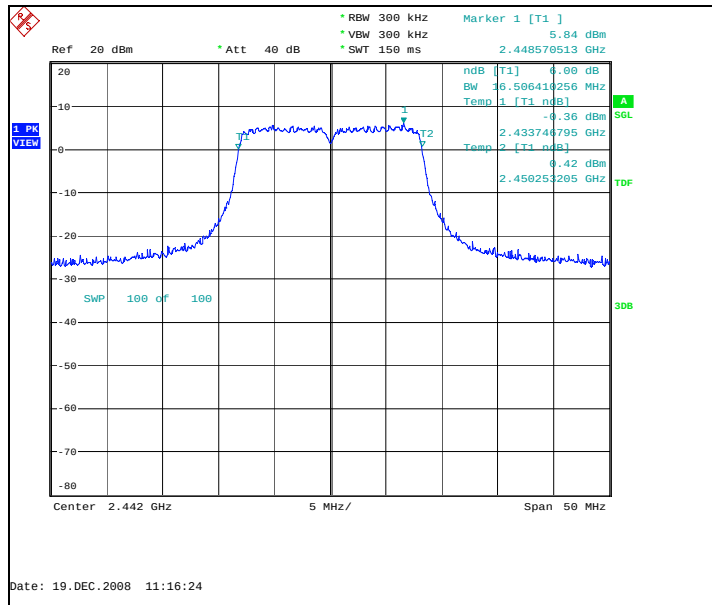

Channel 11 / 2462 MHz

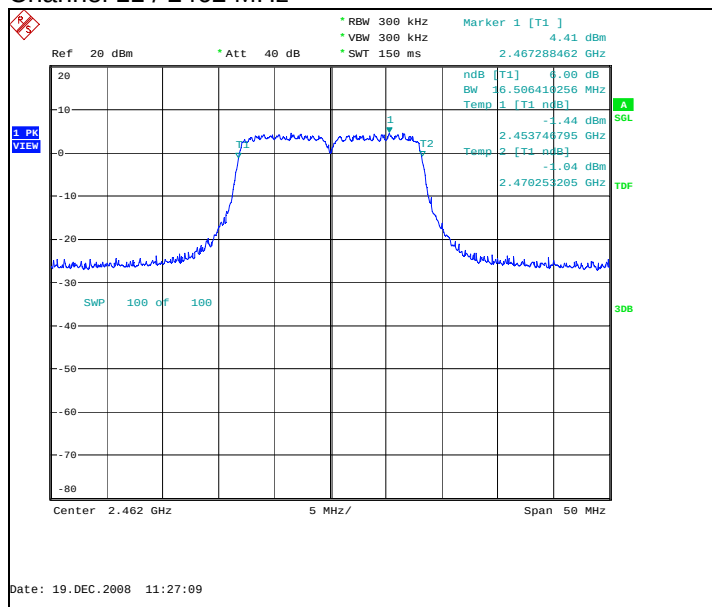

7. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (2))

EUT with DUT number	RM-465 DUT 41470
Accessories with DUT numbers	BL-4U DUT 41741 / AC-8E DUT 41744 / HS-43 DUT 41497
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 45 / 100.9
Date of measurements	19-Dec-2008
Measured by	Petteri Suni

7.1. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for power spectral density measurements


Limit [dBm] @ 3 kHz
≤ 8

7.2. WLAN test results


7.2.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-3.57	PASSED
7 / 2442	-3.44	PASSED
11 / 2462	-3.07	PASSED


Channel 1 / 2412 MHz

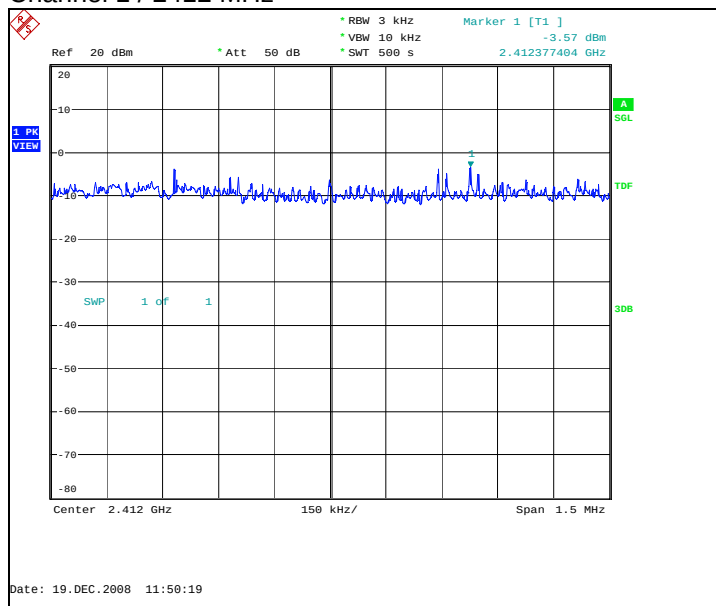

Channel 7 / 2442 MHz

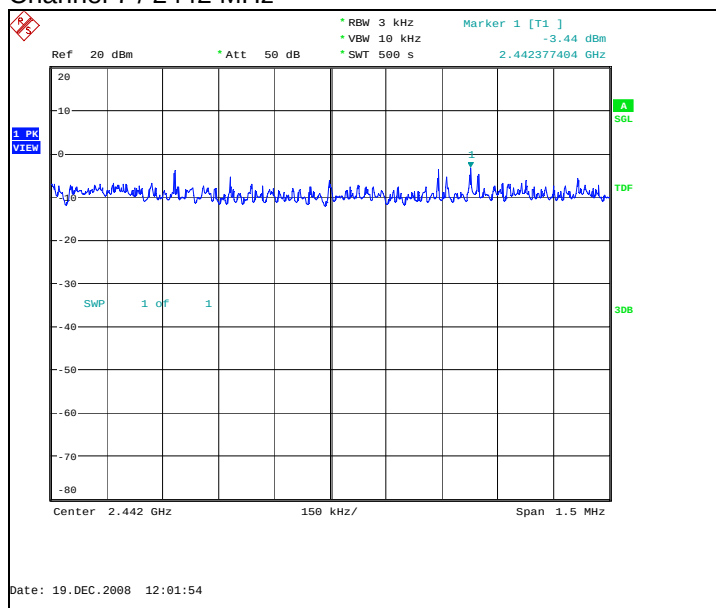


Channel 11 / 2462 MHz

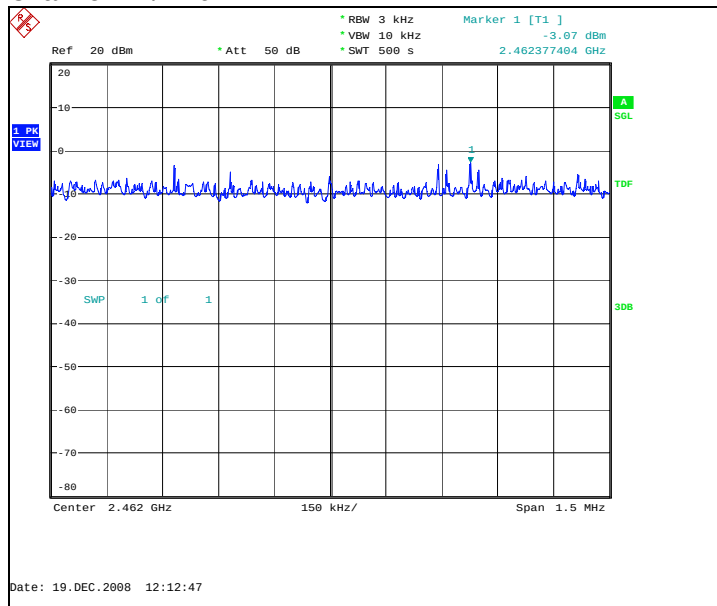


7.2.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-13.18	PASSED
7 / 2442	-11.53	PASSED
11 / 2462	-12.49	PASSED


Channel 1 / 2412 MHz

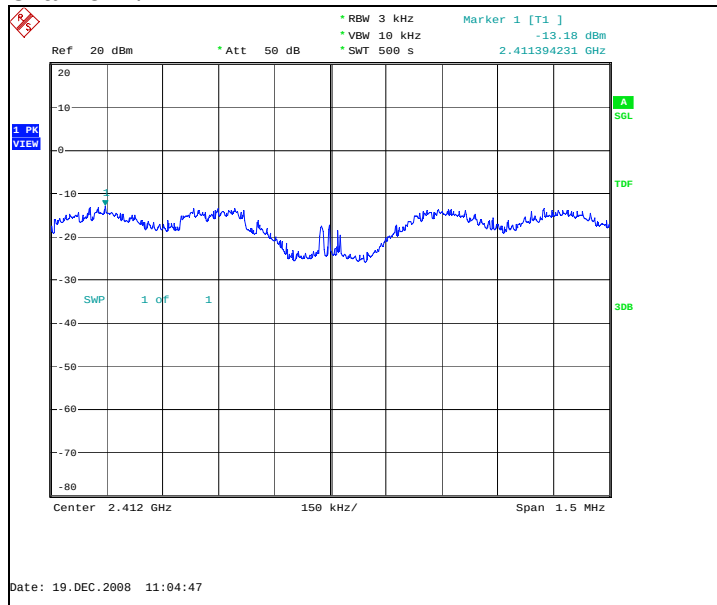

Channel 7 / 2442 MHz

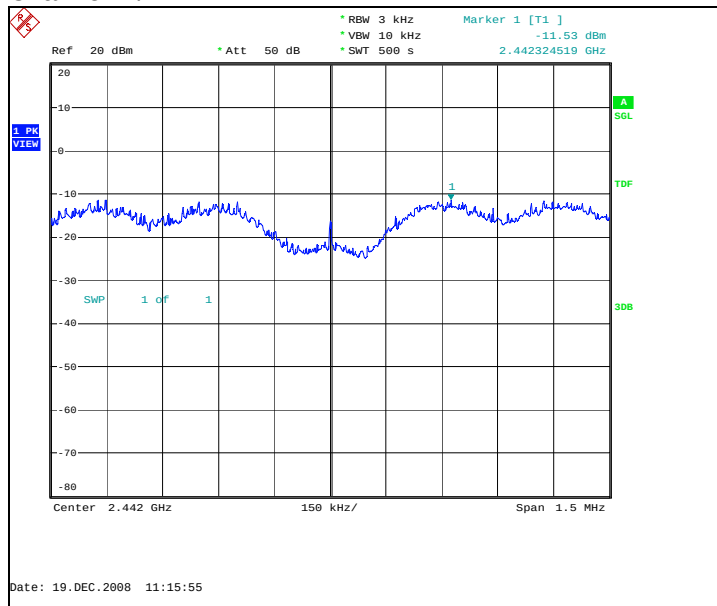

Channel 11 / 2462 MHz

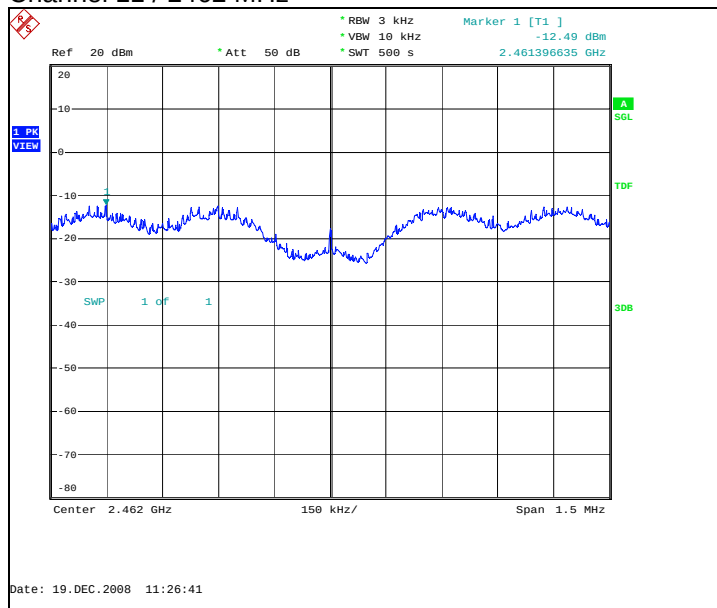

8. Test Equipment

8.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30597	Power splitter	11667A	Agilent	22/24/27, 15C
TM37499	Power splitter	11667A	Agilent	22/24/27, 15C
TM38111	Multimeter	34401A	Agilent	22/24/27, 15C
TM38112	DC power supply	6632A	Agilent	22/24/27, 15C
TM22901	Attenuator	8496A	Agilent	22/24/27, 15C
TM30636	Artificial mains net	L2-16	PMM	15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum analyzer	FSU	R&S	22/24/27, 15C
TM22835	Multimeter	87	Fluke	15C, 15B
TM37500	Microwave switch system	7116-MSW	Keithley	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
	Temperature chamber	VT4002	Vötsch	22/24/27, 15C
2058	EMI Test receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

8.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24/27, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24/27, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24/27, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24/27, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24/27, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24/27, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24/27
TM37502	Dipole antenna	3125-1880	EMCO	22/24/27
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24/27
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24/27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Mast/Turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24/27, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24/27, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transmatic	22/24/27, 15C, 15B
TM23892	Yaesu controller	G-1000SDX	Yaesu	22/24/27, 15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B