

FCC Part 15B Compliance Test Report

Test Report no.:	FCC15B_RM-481_06.doc	Date of Report:	27-Aug-2009
Number of pages:	16	Customer's Contact person:	Teuvo Miettinen
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O. Box 86 Joensuunkatu 7 FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 44277
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-481 / Battery BP-4L, Headset HS-48, AC charger AC-10E, Data cable CA-101, Laptop IBM Thinkpad T40, AC adapter 02K6543, Printer HP deskjet 1600CC3540A, Parallel cable for printer		
FCC ID:	PYARM-481	IC:	661V-RM481
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132 (Issue 2, September 2005), RSS-133 (Issue 5, February 2009), RSS-139 (Issue 1, February 2008) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, Test System Manager

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	21-Apr-2009
Testing completed	13-May-2009
The customer's contact person	Teuvo Miettinen
Test Plan referred to	T:\Projects\RM-469\TestPlan_RS\RS_testplan_RM-469.xls
Notes	-
Document name	T:\Projects\RM-469\EMC\Results\FCC\Tre_FCC_0917_05.doc

1.1. EUT and Accessory Information

The EUT is a 6-band (GSM850/900/1800/1900 and WCDMA Band I/V) mobile phone with GPRS, EGPRS, Bluetooth and WLAN. GSM bands are tested in idle mode. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-469	004401106673441	4100	-	021.001	41845
Phone	RM-469	004401106676253	4100	-	021.003	41881
Battery	BP-4L	3932138517560829280;0670519	-	-	-	41847
AC charger	AC-10E	39979183670904565;0675408	-	-	-	41849
Headset	HS-48	-	-	-	-	41850
Data cable	CA-101	-	-	-	-	41683
Laptop	IBM Thinkpad T40	99ARTGD	-	-	-	41868
AC Adapter	02K6543	-	-	-	-	40202
Printer	HP deskjet 1600CC3540A	USB8302546	-	-	-	40077
Parallel cable for printer	-	-	-	-	-	40087

1.2. Summary of Test Results

GSM 850:

Section in CFR 47	Section in ICES-003 (RSS-132)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5 (4.6)	Radiated emissions	PASSED

GSM 1900:

Section in CFR 47	Section in ICES-003 (RSS-133)	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5 (6.6)	Radiated emissions	PASSED

Bluetooth:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5	Radiated emissions	PASSED

WLAN:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	NP
15.109, a	5.5	Radiated emissions	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Tampere Laboratory.

The test results of PYARM-469 are re-used for certification of the PYARM-481. The table above indicates the results, which will be re-used.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)	5
2.1. Test setup	5
2.2. Test method and limit	5
2.3. GSM 850 Test results	6
3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)	7
3.1. Test setup	7
3.2. Test method and limit	7
3.3. GSM 850 Test results	8
3.4. GSM 1900 Test results	9
3.5. WLAN Test results	10
4. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)	12
4.1. Test setup	12
4.2. Test method and limit	12
4.3. Bluetooth Test results	13
5. Test Equipment.....	15
5.1. Conducted measurements	15
5.2. Radiated measurements	15

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	RM-469 DUT 41845
Accessories with DUT numbers	BP-4L DUT 41847, AC-10E DUT 41849, HS-48 41850
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	FM radio on
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 48 / 102.0
Date of measurements	23-Apr-2009
Measured by	Jari Jantunen

2.1. Test setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. GSM 850 Test results

RX mode, channel 190 / 881.6 MHz

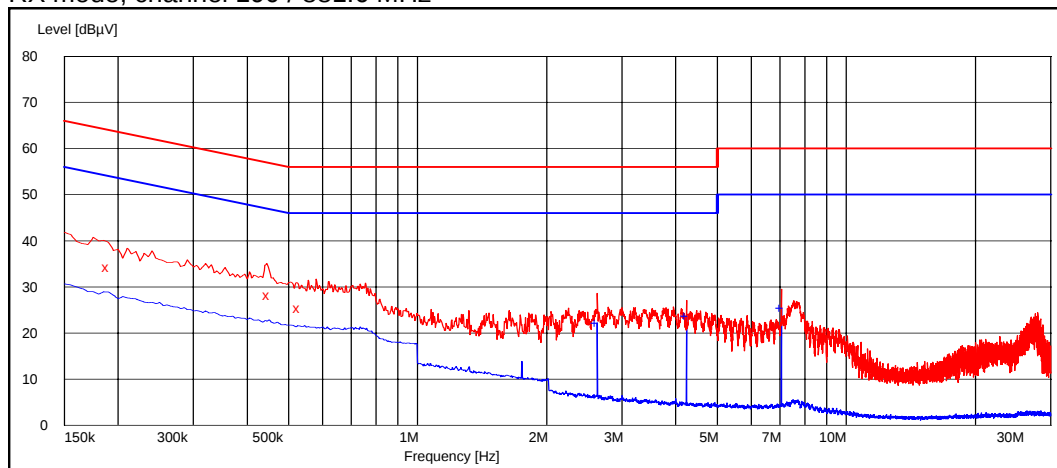

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.190000	34.20	N	PASSED
0.450000	28.30	L1	PASSED
0.530000	25.40	N	PASSED

Average (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
2.625000	22.10	N	PASSED
4.240000	23.60	N	PASSED
7.065000	25.50	L1	PASSED

3. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)

EUT with DUT number	RM-469 DUT 41845
Accessories with DUT numbers	BP-4L DUT 41847, AC-10E DUT 41849, HS-48 41850
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21-22 / 48-50 / 100.3-102.0
Date of measurements	07... 13-May-2009
Measured by	Jari Jantunen

3.1. Test setup

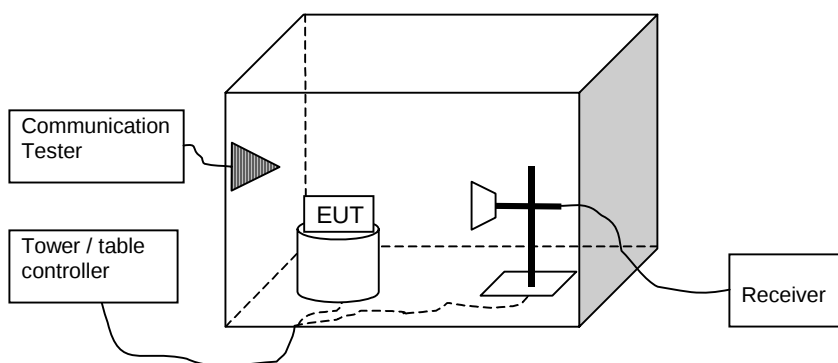

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

3.3. GSM 850 Test results

RX mode, channel 128 / 869.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3476.800000	42.70	136.46	47.40	-4.7	VERTICAL	PASSED
6953.600000	43.20	144.54	41.50	1.7	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3476.800000	27.80	24.55	32.50	-4.7	VERTICAL	PASSED
6953.600000	30.30	32.73	28.60	1.7	HORIZONTAL	PASSED

RX mode, channel 190 / 881.6 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
32.404810	27.80	24.55	54.50	-26.7	VERTICAL	PASSED
70.641283	16.50	6.68	54.30	-37.8	VERTICAL	PASSED
102.263327	22.80	13.80	58.00	-35.2	VERTICAL	PASSED
134.290180	21.40	11.75	55.70	-34.3	HORIZONTAL	PASSED
192.084168	21.20	11.48	58.50	-37.3	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3525.552104	41.40	117.49	46.10	-4.7	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3526.552104	28.00	25.12	32.70	-4.7	VERTICAL	PASSED

RX mode, channel 251 / 893.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.200000	42.70	136.46	47.10	-4.4	VERTICAL	PASSED
7150.400000	43.00	141.25	40.50	2.5	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3575.200000	28.00	25.12	32.40	-4.4	VERTICAL	PASSED
7150.400000	30.10	31.99	27.60	2.5	VERTICAL	PASSED

3.4. GSM 1900 Test results

RX mode, channel 512 / 1930.2 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	42.40	131.83	44.60	-2.2	HORIZONTAL	PASSED
7720.000000	43.10	142.89	39.60	3.5	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3860.000000	28.00	25.12	30.20	-2.2	HORIZONTAL	PASSED
7720.000000	30.90	35.08	27.40	3.5	HORIZONTAL	PASSED

RX mode, channel 661 / 1960.0 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
32.904810	38.40	83.18	65.30	-26.9	VERTICAL	PASSED
96.451303	22.40	13.18	58.00	-35.6	VERTICAL	PASSED
103.184770	26.00	19.95	61.10	-35.1	VERTICAL	PASSED
131.080561	25.00	17.78	59.20	-34.2	HORIZONTAL	PASSED
151.201202	18.50	8.41	53.50	-35.0	HORIZONTAL	PASSED
192.184168	27.20	22.91	64.50	-37.3	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3528.054108	39.10	90.16	43.80	-4.7	VERTICAL	PASSED
3919.839679	44.20	162.18	45.90	-1.7	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
1959.921844	49.10	285.10	63.90	-14.8	VERTICAL	PASSED
3526.054108	25.80	19.50	30.50	-4.7	VERTICAL	PASSED

3920.339679	29.30	29.17	31.00	-1.7	HORIZONTAL	PASSED
-------------	-------	-------	-------	------	------------	--------

RX mode, channel 810 / 1989.8 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3980.000000	43.10	142.89	44.80	-1.7	VERTICAL	PASSED
7960.000000	44.40	165.96	40.30	4.1	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3980.000000	28.90	27.86	30.60	-1.7	VERTICAL	PASSED
7960.000000	31.70	38.46	27.60	4.1	HORIZONTAL	PASSED

3.5. WLAN Test results

TX mode, channel 1 / 2412 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4824.000000	39.00	89.13	40.40	-1.4	HORIZONTAL	PASSED
7236.000000	43.00	141.25	39.90	3.1	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4824.000000	26.70	21.63	28.10	-1.4	HORIZONTAL	PASSED
7236.000000	30.70	34.28	27.60	3.1	HORIZONTAL	PASSED

TX mode, channel 7 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
37.595391	22.20	12.88	36.10	-13.9	VERTICAL	PASSED
130.642485	25.30	18.41	48.30	-23.0	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
7317.141283	43.30	146.22	39.90	3.4	VERTICAL	PASSED
7317.629259	44.50	167.88	41.10	3.4	HORIZONTAL	PASSED
17987.479960	54.10	506.99	34.30	19.8	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
7314.129259	30.80	34.67	27.40	3.4	HORIZONTAL	PASSED
7319.641283	30.50	33.50	27.10	3.4	VERTICAL	PASSED
17991.479960	41.10	113.50	21.30	19.8	VERTICAL	PASSED

TX mode, channel 11 / 2462 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4924.000000	40.20	102.33	41.50	-1.3	HORIZONTAL	PASSED
7386.000000	43.00	141.25	39.50	3.5	HORIZONTAL	PASSED

Average (RBW: 1 MHz)


Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4924.000000	27.40	23.44	28.70	-1.3	HORIZONTAL	PASSED
7386.000000	30.30	32.73	26.80	3.5	HORIZONTAL	PASSED

4. Radiated emissions

(FCC §15.109, ICES-003 section 5.5, RSS-132 4.6, RSS-133 6.6, RSS-139 6.6)

EUT with DUT number	RM-469 DUT 41881
Accessories with DUT numbers	BP-4L DUT 41847, HS-48 41850, CA-101 DUT 41683, IBM Thinkpad T40 DUT 41868, 02K6543 DUT 40202, HP deskjet 1600CC3540A DUT 40077, Parallel cable for printer DUT 40087
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	Continuous data transfer was active between the phone and the computer during the test.
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 50 / 102.0
Date of measurements	13-May-2009
Measured by	Jari Jantunen

4.1. Test setup

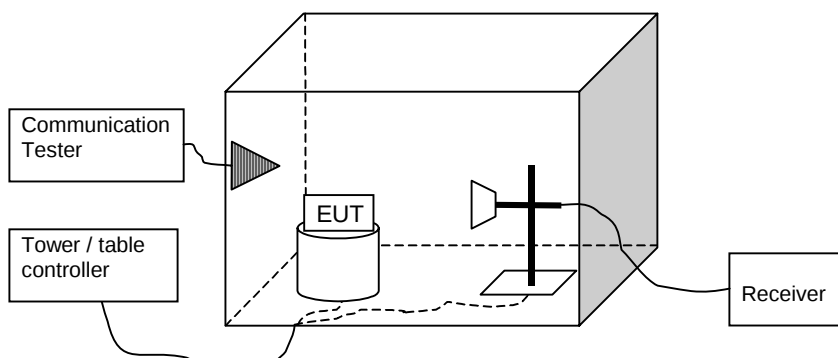

4.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

4.3. Bluetooth Test results

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
4804.000000	42.30	130.32	43.40	-1.1	VERTICAL	PASSED
7206.000000	46.80	218.78	44.00	2.8	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
4804.000000	29.70	30.55	30.80	-1.1	VERTICAL	PASSED
7206.000000	33.70	48.42	30.90	2.8	VERTICAL	PASSED

TX mode, channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
171.342685	25.70	19.28	49.90	-24.2	HORIZONTAL	PASSED
240.782164	30.20	32.36	52.70	-22.5	HORIZONTAL	PASSED
257.014028	31.80	38.90	54.00	-22.2	VERTICAL	PASSED
400.500401	31.60	38.02	50.20	-18.6	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U_{RX} [dBμV]	A_{TOT} [dB]	Polarisation	Result
7325.653307	45.70	192.75	42.40	3.3	VERTICAL	PASSED
7326.151303	44.80	173.78	41.50	3.3	VERTICAL	PASSED
17905.317635	54.00	501.19	34.00	20.0	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
7325.651303	32.00	39.81	28.70	3.3	VERTICAL	PASSED
7326.153307	32.50	42.17	29.20	3.3	VERTICAL	PASSED
17912.317635	41.00	112.20	21.10	19.9	HORIZONTAL	PASSED

TX mode, channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	41.10	113.50	41.60	-0.5	VERTICAL	PASSED
7440.000000	43.60	151.36	40.10	3.5	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	28.60	26.92	29.10	-0.5	VERTICAL	PASSED
7440.000000	30.70	34.28	27.20	3.5	VERTICAL	PASSED

5. Test Equipment

5.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30597	Power splitter	11667A	Agilent	22/24/27, 15C
TM37499	Power splitter	11667A	Agilent	22/24/27, 15C
TM38111	Multimeter	34401A	Agilent	22/24/27, 15C
TM38112	DC power supply	6632A	Agilent	22/24/27, 15C
TM22901	Attenuator	8496A	Agilent	22/24/27, 15C
TM30636	Artificial mains net	L2-16	PMM	15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum analyzer	FSU	R&S	22/24/27, 15C
TM22835	Multimeter	87	Fluke	15C, 15B
TM37500	Microwave switch system	7116-MSW	Keithley	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transformatic	22/24/27, 15C, 15B
	Temperature chamber	VT4002	Vötsch	22/24/27, 15C
2058	EMI Test receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

5.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24/27, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24/27, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24/27, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24/27, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24/27, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24/27, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24/27
TM37502	Dipole antenna	3125-1880	EMCO	22/24/27
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24/27
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24/27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Mast/Turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24/27, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24/27, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transformativ	22/24/27, 15C, 15B
TM23892	Yaesu controller	G-1000SDX	Yaesu	22/24/27, 15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B