

## Electromagnetic Emission

# FCC MEASUREMENT REPORT

### CERTIFICATION OF COMPLIANCE

### FCC Part 15 Certification Measurement

**PRODUCT** : Digital Cable Receiver  
**MODEL/TYPE NO** : STB-100H  
**FCC ID** : PZ8STB-100H  
**APPLICANT / ADDRESS** : Hyundai Digital Technology Co., Ltd.  
223-22, Sangdaewon-1dong, Jungwon-gu  
Seongnam-si, Kyongki-do, Korea 462-807  
Attn.: Hyung-In, Kim / Manager  
**FCC CLASSIFICATION** : HID : TV interface device  
**FCC RULE PART(S)** : FCC Part 15 Subpart B  
**FCC PROCEDURE** : Certification  
**TRADE NAME** :  
**TEST REPORT No.** : E05.0609.FCC.330N  
**DATES OF TEST** : May 20, 2005 ~ June 3, 2005  
**DATES OF ISSUE** : June 9, 2005  
**TEST LABORATORY** : ETL Inc. (FCC Registration Number: 95422)  
#584 Sangwhal-ri, Kanam-myon, Yaju-kun, Kyonggi-do,  
469-885, Korea  
Tel: 82-31- 885-0072 Fax: 82-31-885-0074

This Digital Cable Receiver, Model STB-100H has been tested in accordance with the measurement procedures specified in ANSI C63.4-2001 at the ETL/EMC Test Laboratory and has been shown to comply with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B: TV interface device.

I attest to the accuracy of data. All measurement here in was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system, which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Yo Han, Park / Chief Engineer

**ETL Inc.**

**#584 Sangwhal-ri, Kanam-myon, Yaju-kun, Kyonggi-do, 469-885, Korea**

---

## Table of Contents

### ATTACHMENT A: COVER LETTER(S)

#### FCC Measurement Report

1. Introduction
2. Product Information
3. Description of Tests
4. Test Condition
5. Test Results
  - 5.1 Summary of Test Results
  - 5.2 Conducted Emission Test
  - 5.3 Radiated Emission Test
  - 5.4 Antenna Power Conduction Measurement
  - 5.5 Output Signal Level Measurement
  - 5.6 Output Terminal Conducted Spurious Emission Measurement
  - 5.7 Transfer Switch Measurement
6. Sample Calculation
7. List of test Equipment used for Measurements

Appendix A. FCC ID Label and Location

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

Appendix E. Block Diagram

Appendix F. Operating Manual

## FCC MEASUREMENT REPORT

**Scope** – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

### General Information

**Applicant Name** : Hyundai Digital Technology Co., Ltd.

**Address** : 223-22, Sangdaewon-1dong, Jungwon-gu  
Seongnam-si, Kyungki-do, Korea 462-807

**Attention** : Hyung-In , Kim / Manager

- **EUT Type** : Digital Cable Receiver
- **Model Number** : STB-100H
- **FCC Identifier** : PZ8STB-100H
- **S/N** : N/A
- **Freq. Range** : 61.25MHz – 71.75MHz
- **FCC Rule Part(s)** : Part 15 Subpart B
- **Test Procedure** : ANSI C63.4-2001
- **FCC Classification** : TV Interface Device
- **RF Channels** : Ch. 3 / Ch. 4
- **Dates of Tests** : May 20, 2005 ~ June 3, 2005
- **Place of Tests** : ETL Inc.  
584, Sangwhal-Ri, Kanam-Myun, Yaju-Kun,  
Kyounggi-Do, Korea  
Tel : 82-31- 885-0072 Fax : 82-31- 885-0074
- **Test Report No.** : E05.0609.FCC.330N

## 1. INTRODUCTION

---

The measurement test for radiated and conducted emission test were conducted at the shielded anechoic chamber room and open area test site of E-RAE Testing Laboratory Inc. facility located at 584, Sangwhal-ri, Ganam-myun, Youju-kun, Kyoungki-do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-2001 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2001 and registered to the Federal Communications Commission(Registration Number : 95422 ).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-2001) was used in determining radiated and conducted emissions from the Hyundai Digital Technology Co.,Ltd. Digital Cable Receiver, Model : STB-100H

## 2. PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test(EUT) is the Hyundai Digital Technology Co., Ltd. Digital Cable Receiver,  
Model : STB-100H

### 2.2 General Specification

- Chassis Type : Metal
- List of Each OSC. Or X-Tal. Freq.(≥1MHz) : 27.00 MHz, 11.0592 MHz

|                       |                         |                                       |
|-----------------------|-------------------------|---------------------------------------|
| System capabilities   | Fully DVB-C(QAM) system |                                       |
|                       | Connector               | IEC 169-24, female                    |
|                       | Input Frequency range   | 47-862Mhz                             |
|                       | Signal level            | -15 ~ +15 dBmV                        |
| Tuner input &         | Input Impedance         | 75 ohm                                |
|                       | Modulation Format       | 64, 128, 256 QAM                      |
|                       | FEC                     | Annex A & C                           |
|                       | Front end               | Cable                                 |
|                       | Symbol rate             | 4 ~ 5.2Mps                            |
|                       | IF Band width           | 6 MHz                                 |
|                       | Processor               | 32bit processor                       |
|                       | SDRAM                   | 16Mbyte                               |
|                       | FLASH                   | 8Mbyte                                |
|                       | EEPROM                  | 32Kbyte                               |
| Video Decoder         | MPEG 2                  | Main Profile @ Main Level             |
|                       | Data Rate               | up to 15M bits/s                      |
|                       | Resolution              | 720 X 480                             |
|                       | Video format            | NTSC                                  |
|                       | Aspect Ratio            | 4:3, 16:9                             |
| MPEG Audio            | MPEG 1 layer 1 & 2      |                                       |
|                       | Type                    | Mono, Dual mono, Stereo, Joint Stereo |
|                       | Sampling rates          | 32, 44.1 and 48 KHz                   |
| Remote control        | Code                    | NEC-IR                                |
|                       | Operating condition     | up to 7 Meter                         |
| Power supply          | Power consumption       | 20W                                   |
|                       | Supply voltage          | 90 ~ 250V                             |
|                       | Supply frequency        | 50Hz ~ 60Hz                           |
| Rear panel Connectors | RCA Connector           | CVBS Video output (1 cinch)           |
|                       |                         | Audio L/R output (4 cinch)            |
|                       |                         | Digital Audio output (1 cinch)        |
|                       | Digital tuner input     | IEC 169-24, female                    |
|                       | RF out put              | IEC 169-24, female                    |
| Physical              | Size(W X H X D)         | 260 X 53.5 X 235 (mm)                 |
| Specification         | Weight(Net)             | 2.3Kg                                 |

## 3. DESCRIPTION OF TESTS

---

### 3.1 AC Powerline Conducted Emissions Test

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2001. The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50Ω /50uH LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within an bandwidth of 10 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1m x 1.5m x 0.8m wooden table which is placed 40cm away from the vertical wall and 1.5m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the another LISN. Power to the LISNs is filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling (serpentine fashion) to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the Spectrum Analyzer and Test Receiver to determine the frequency producing the max. emission from the EUT. The frequency producing the max. level was reexamined using the detector function set to the CISPR Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30 MHz. The bandwidth of the Test Receiver was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was maximized by switching power lines, varying the mode of operation or resolution, clock or data exchange speed, if applicable, whichever determined the worst-case emission. Each emission reported was calibrated using self-calibrating mode.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup in Appendix B.

## 3. DESCRIPTION OF TESTS

---

### 3.2 Radiated Emissions Test

Preliminary measurements were made at indoors 3 meter semi EMC Compact Chamber using broadband antennas, broadband amplifier, and spectrum analyzer to determine the emission frequencies producing the maximum EME. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000 MHz using biconilog antenna and above 1000 MHz, linearly polarized double ridge horn antennas were used. Above 1GHz, linearly polarized double ridge horn antennas were used. The measurements were performed with three frequencies which were selected as bottom, middle and top frequency in the operating band. Emission level from the EUT with various configurations were examined on the spectrum analyzer connected with the RF amplifier and plotted graphically.

Final measurements were made outdoors open site at 3-meter test range using biconilog antenna. The output from the antenna was connected, via a preselector or a preamplifier, to the input of the EMI Measuring Receiver or Spectrum analyzer(for above 1GHz). The detector function was set to the quasi-peak or peak mode as appropriate. The measurement bandwidth on the Field strength receiver was set to at least 120kHz (1MHz for measurement above 1GHz), with all post-detector filtering no less than 10 times the measurement bandwidth. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during preliminary measurement was examined and investigated as the same set up and configuration which produced the maximum emission The EUT , support equipment and interconnecting cables were configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1m x 1.5 meter table. The turntable containing the system was rotated and the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission.


Each emission was maximized by varying the mode of operating frequencies of the EUT. The worst case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor(20dB/decade) as per section 15.31(f).

Photographs of the worst-case emission test setup can be seen in Appendix B.

## 3. DESCRIPTION OF TESTS

### 3.3 Antenna-Conducted Power Measurements

Power on the receive antenna terminals was to be determined by measurement of the voltage present at these terminals. Antenna-conducted power measurements is performed with the EUT antenna terminals connected directly to a spectrum analyzer, if the antenna impedance matches the impedance of the measuring instrument. Otherwise, use an impedance-matching network to connect the measuring instrument to the antenna terminals of the EUT. Losses in decibels in any impedance-matching network used is added to the measured value in dB $\mu$ V. With the EUT tuned to one of the frequency over which device operates , measure both the frequency and voltage present at the antenna input terminals over the frequency range specified in the individual equipment requirements. Repeat this measurement with the receiver tuned to another frequency until the number of frequencies specified have been successively measured. Power on the receive antenna terminals is the ratio of  $V^2/R$ , where V is the loss-corrected voltage measured at the antenna terminals, and R is the impedance of the measuring instrument.

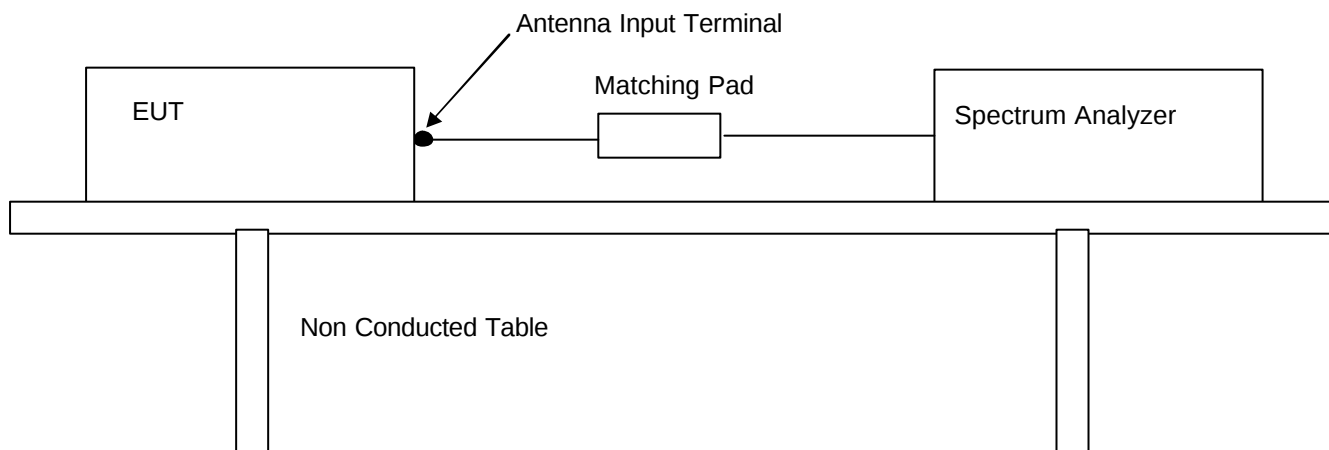

## 3. DESCRIPTION OF TESTS


### 3.4 Output Signal Conducted Level Measurement

The output signal level is the maximum voltage level present at the output terminals of the EUT on a particular frequency during normal use of the device.

The signal level was measured by direct connection to the spectrum analyzer with 50/75 ohm matching transformer between the spectrum analyzer and the TV interface device. The RF output signal level measured was the highest RF level present at the output terminals during normal use of the device. Measurements were made of the levels of both the visual (61.25 MHz) and audio (65.75 MHz) carrier for each TV channel (3 and 4) on which the device operates. The cable was supported between the EUT and the measuring instrument in a straight horizontal line so it had at least 75cm clearance from any conducting surface.

The EUT is provided with a typical signal consistent with normal operation. For each channel on which the EUT operates and in each mode in which the device operates, the video and audio carrier level is measured and recorded.

The voltage corresponding to the peak envelope power of the video modulated signal during maximum amplitude peaks across a resistance ( $R$  ohms) matching the rated output impedance of the device, must not exceed  $692.8 R^{1/2}$   $\mu V$  for all other TV interface device. The voltage corresponding to peak envelope power of the audio modulated signal, if provided by the TV interface device, must not exceed  $155 R^{1/2}$   $\mu V$  for cable system terminal device of TV interface device used with a master antenna, and  $77.5 R^{1/2}$   $\mu V$  for all other TV interface device. Losses in decibels in any impedance-matching network used is added to the measured value in dB $\mu V$ . The EUT was configured in accordance with ANSI C63.4-2001 Section 12.2 as below configuration block diagram.

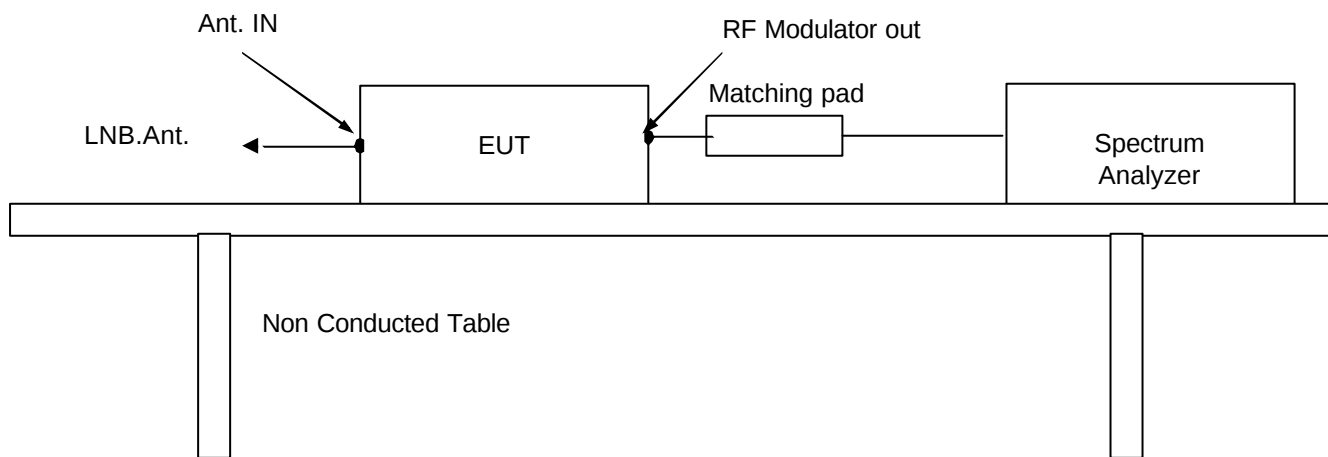


## 3. DESCRIPTION OF TESTS

### 3.5 Output Terminal Conducted Spurious Emission Measurement

The RF output signal was fed to the TV receiver via coaxial cable. Measurements were made by direct connection to the spectrum analyzer and TV interface device with 50/75 ohm matching transformer. The frequency range 30 to 1000 MHz was investigated for significant emission.

The maximum RMS voltage of any emission appearing on frequencies removed by more than 4.6 MHz below and 7.4 MHz above the video carrier frequency on which the TV interface device is operated must not exceed  $692.8 R^{1/2}$   $\mu V$  for cable system terminal device or TV interface device used with a master antenna and  $10.95 R^{1/2}$   $\mu V$  for all other TV interface device when terminated with a resistance (R ohms) matching the rated output impedance of the TV interface device. The EUT was configured in accordance with ANSI C63.4-2001 Section 12.2 as below configuration block diagram.

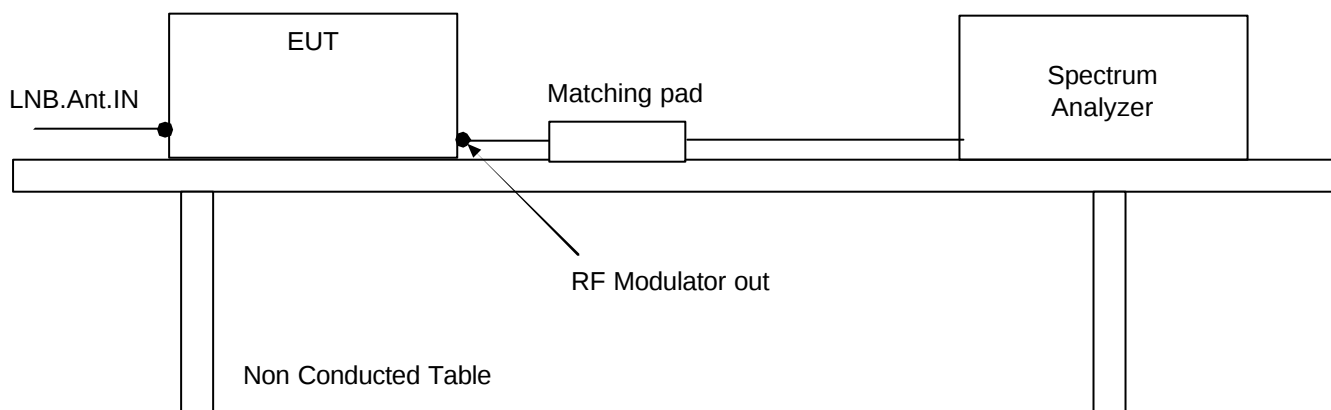

## 3. DESCRIPTION OF TESTS


### 3.6 Antenna Transfer Switch Measurement

Isolation was measured for all positions of an antenna transfer switch on all output channels of the EUT. TV interface device transfer switch isolation is the difference the levels of a signal going into one antenna input port of the switch and that of the same signal coming out of another antenna terminal of transfer switch. The isolation of an antenna transfer switch equipped with coaxial connectors is performed by measuring the maximum voltage of the visual carrier. Measurements were made of the maximum RMS voltage at the antenna input terminals of the switch for all positions of the transfer switch. The maximum voltage corresponds to the peak envelope power of the video signal during maximum amplitude peaks. In either position of the receiver transfer switch, the maximum voltage at the receiving antenna input terminals of the switch when terminated with a resistance (R ohms) matching the rated impedance of the antenna input of the switch, must not exceed  $0.346 R^{1/2} \mu V$ .

The maximum voltage corresponds to the peak envelope power of the video modulated signal during maximum amplitude.

The EUT was configured in accordance with ANSI C63.4-2001 Section 12.2 as below configuration block diagram. and the EUT configuration can also be seen in Appendix B. Photographs of the test setup.

The unused RF input/output terminals are terminated in a proper impedance. The antenna input terminal is connected to the the input of preamplifier through the matching transformer coaxial cable. And the output of preamplifier is connected to the spectrum analyzer. Then, the signal level on the antenna input terminal is measured under the EUT condition produced the maximum signal level.

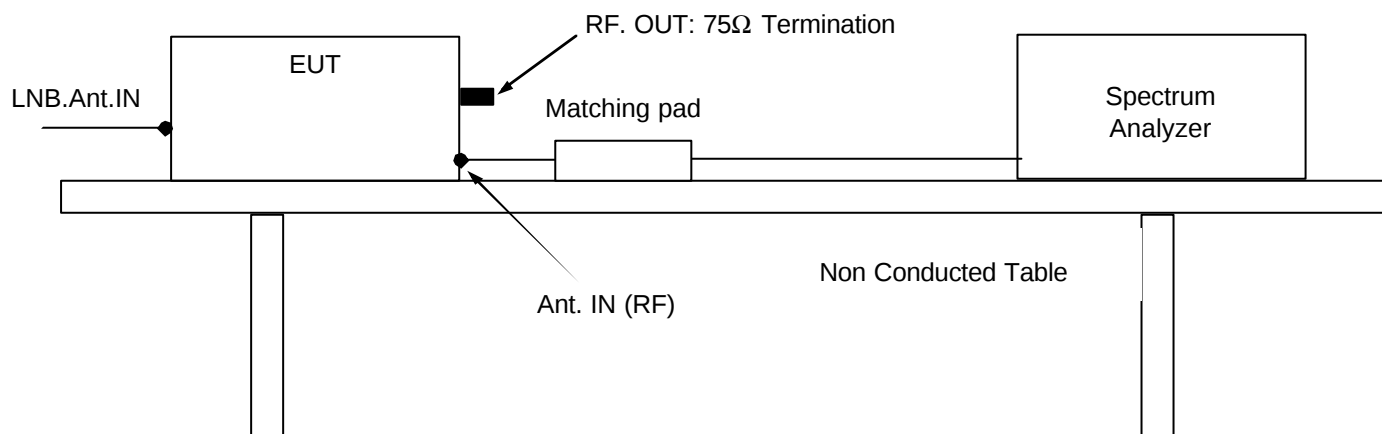

## 4. TEST CONDITION

---

### 4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner which tends to maximize its emission level in a typical application.

### 4.2 EUT operation

The EUT was set to the normal receiving mode in a TV mode during all the testing in a manner similar to a typical use. For the EUT operation, the satellite live signal was fed to the EUT through the LNB input. During the preliminary testing, the worst case condition of the operating mode was ch.3

### 4.3 Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

#### EUT- Digital Satellite Receiver

|                   |                                                                                            |
|-------------------|--------------------------------------------------------------------------------------------|
| FCC ID            | : PZ8STB-100H                                                                              |
| Model Name        | : STB-100H                                                                                 |
| Serial No.        | : N/A                                                                                      |
| Manufacturer      | : PRO BROADBAND (SHEN ZHEN) INC.                                                           |
| Power Supply Type | : Switching type                                                                           |
| Data Cable        | : 1.5 m Shielded RF coaxial cable, 1.5m Shielded RCA cable,<br>1.5m Shielded S-video cable |

#### Support Unit 1 - TV

|                   |                           |
|-------------------|---------------------------|
| FCC ID            | : N/A                     |
| Model Name        | : DTQ-2002                |
| Serial No.        | : 909ZC00108              |
| Manufacturer      | : DAEWOO Electronics      |
| Power Supply Type | : Switching               |
| Data Cable        | : refer to EUT connection |

#### Support Unit 2 – DVD Player

|                   |                    |
|-------------------|--------------------|
| FCC ID            | : N/A              |
| Model Name        | : DVDP-M100        |
| Serial No.        | : N/A              |
| Manufacturer      | : Alphacast        |
| Power Supply Type | : External Adapter |
| Data Cable        | :                  |

## 5. TEST RESULTS

---

### 5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

| FCC Rule Parts   | Measurement Required                                    | Result             |
|------------------|---------------------------------------------------------|--------------------|
| 15.107           | Conducted Emission                                      | Passed by 12.30 dB |
| 15.109           | Radiated Emission                                       | Passed by 1.22 dB  |
| 15.111           | Antenna Power Conduction Measurement                    | Passed by 4.28 dB  |
| 15.115(b)(1)(ii) | Output Signal Level Measurement                         | Passed by 2.56 dB  |
| 15.115(b)(2)(ii) | Output Terminal Conducted Spurious Emission Measurement | Passed by 11.13 dB |
| 15.115(c)(1)(ii) | Transfer Switch Measurement                             | Passed             |

The data collected shows that the **Hyundai Digital Technology Co., Ltd. Digital Cable Receiver, STB-100H** complies with Part 15 Subpart B Unintentional radiators and the TV Interface Device section(15.115) of the FCC Rules.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

## 5. TEST RESULTS

### 5.2 Conducted Emission Test

|                       |                                            |
|-----------------------|--------------------------------------------|
| EUT                   | Digital Cable Receiver / STB-100H (SN:N/A) |
| Limit apply to        | FCC Part 15 Subpart B Section 15.107       |
| Test Date             | May 27, 2005                               |
| Operating Condition   | TV Mode (Channel 3)                        |
| Environment Condition | Humidity Level : 32 %RH, Temperature : 19  |
| Result                | Passed by 12.30 dB                         |

#### Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.  
Detector mode : CISPR Quasi-Peak mode ( 6dB Bandwidth : 9 kHz )

| Frequency<br>[MHz] | Result<br>[dB $\mu$ V] |         | Phase<br>(*L/**N) | Limit<br>[dB $\mu$ V] |         | Margin<br>[dB] |         |
|--------------------|------------------------|---------|-------------------|-----------------------|---------|----------------|---------|
|                    | Quasi-peak             | Average |                   | Quasi-peak            | Average | Q.Peak         | Average |
| 0.190              | 51.7                   | -       | H                 | 64.0                  | 54.0    | 12.3           | -       |
| 0.255              | 42.3                   | -       | N                 | 61.6                  | 51.6    | 19.3           | -       |
| 0.322              | 35.4                   |         | H                 | 59.7                  | 49.7    | 24.3           | -       |
| 0.387              | 33.6                   |         | H                 | 58.1                  | 48.1    | 24.5           | -       |
| 1.337              | 30.3                   |         | H                 | 56.0                  | 46.0    | 25.7           | -       |
| 9.545              | 31.1                   |         | N                 | 60.0                  | 50.0    | 28.9           | -       |
| 9.697              | 33.3                   |         | H                 |                       |         | 26.7           | -       |
| 22.675             | 33.0                   |         | H                 |                       |         | 27.0           | -       |

#### NOTES :

1. \*H : Live Line , \*\*N :Neutral Line
2. Margin value = Result - Limit.
3. Channel 3 was the worst case operation mode



Test Engineer : K.K. Yoon

## 5. TEST RESULTS

### 5.3 Radiated Emission Test

|                       |                                            |
|-----------------------|--------------------------------------------|
| EUT                   | Digital Cable Receiver / STB-100H (SN:N/A) |
| Limit apply to        | FCC Part 15 Subpart B Section 15.109       |
| Test Date             | May 27, 2005                               |
| Operating Condition   | TV Mode (Channel 3)                        |
| Environment Condition | Humidity Level : 26 %RH, Temperature : 24  |
| Result                | Passed by 1.22 dB                          |

#### Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Detector mode : CISPR Quasi-Peak mode ( 6dB Bandwidth : 120 kHz )

Measurement Distance : 3 meters

| Frequency [MHz] | Reading [dB $\mu$ V] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB] | Result [dB $\mu$ V /m] | Limit [dB $\mu$ V /m] | Margin [dB] |
|-----------------|----------------------|-----------------------|--------------------|-----------------|------------------------|-----------------------|-------------|
| 54.30           | 20.24                | V                     | 12.03              | 2.10            | 34.37                  | 40.0                  | 5.63        |
| 69.15           | 22.26                | V                     | 10.00              | 2.19            | 34.45                  | 40.0                  | 5.55        |
| 162.30          | 21.64                | H                     | 12.91              | 3.72            | 38.27                  | 43.5                  | 5.23        |
| 275.70          | 26.59                | H                     | 12.45              | 5.24            | 44.28                  | 46.0                  | 1.72        |
| 459.25          | 20.30                | H                     | 17.21              | 7.27            | 44.78                  | 46.0                  | 1.22        |
| 643.00          | 12.60                | H                     | 18.14              | 9.24            | 39.98                  | 46.0                  | 6.02        |

#### NOTES :

1. \* H : Horizontal polarization , \*\* V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. Channel 3 was the worst case operation mode.



Test Engineer : K.K. Yoon

## 5. TEST RESULTS

### 5.4 Antenna Power Conduction Measurement

|                       |                                            |
|-----------------------|--------------------------------------------|
| EUT                   | Digital Cable Receiver / STB-100H (SN:N/A) |
| Limit apply to        | FCC Part 15 Subpart B Section 15.111       |
| Test Date             | June 2, 2005                               |
| Operating Condition   | LNB Tuner                                  |
| Environment Condition | Humidity Level : 35 %RH, Temperature : 18  |
| Result                | Passed by 4.28 dB                          |

#### Antenna Power Conduction Test Data

| Tuned Frequency [MHz] | Meter Reading [dBμV] | Correction Factor [dB] | Result [dBμV] | Limit [dBμV] | Margin [dB] |
|-----------------------|----------------------|------------------------|---------------|--------------|-------------|
| 643.0                 | 38.22                | 7.5                    | 45.72         | 50.0         | 4.28        |
| 2425.0                | 33.73                | 9.4                    | 41.23         |              | 8.77        |

#### NOTES :

- Result = Meter Reading + Correction Factor(Matching Loss + Cable loss)**  
**Margin value = Limit – Result**
- Measurements using the CISPR Quasi-peak mode in the the frequency range 30 to 1000 MHz and measurements using the CISPR peak mode in the the frequency range 1000 to 5000 MHz .
- The limits is 2.0 nanowatts in the frequency range 30 to 5000 MHz.



Test Engineer : K.K. Yoon

## 5. TEST RESULTS

### 5.5 Output Signal Level Measurement

|                       |                                            |
|-----------------------|--------------------------------------------|
| EUT                   | Digital Cable Receiver / STB-100H (SN:N/A) |
| Limit apply to        | FCC Part15 Subpart B Section 15.115(b)(1)  |
| Test Date             | June 2, 2005                               |
| Operating Condition   | TV Mode (Channel3, 4)                      |
| Environment Condition | Humidity Level : 35 %RH, Temperature : 18  |
| Result                | Passed by 2.56 dB                          |

#### Output Signal Test Data

| Test Channel | Emission Frequency [MHz] | Meter Reading [dB $\mu$ V] | Correction Factor [dB] | Signal Level [dB $\mu$ V] | Limit [dB $\mu$ V] | Margin [dB] |
|--------------|--------------------------|----------------------------|------------------------|---------------------------|--------------------|-------------|
| 3            | 61.25                    | 59.44                      | 7.5                    | 66.94                     | 69.5               | 2.56        |
|              | 65.75                    | 43.83                      | 7.5                    | 51.33                     | 56.5               | 5.17        |
| 4            | 67.25                    | 59.33                      | 7.5                    | 66.83                     | 69.5               | 2.67        |
|              | 71.75                    | 43.00                      | 7.5                    | 50.50                     | 56.5               | 6.00        |

#### NOTES :

1. The correction factor consist of the insertion loss of the impedance matching transformer and the coaxial cable used for the test.
2. The spectrum was checked in each test mode and operation mode, and the maximum measured data were reported.
3.  $\text{Signal Level} = \text{Meter Reading} + \text{Correction Factor}(\text{Matching Loss} + \text{Cable loss})$   
 $\text{Margin value} = \text{Limit} - \text{Signal Level}$



Test Engineer : K.K. Yoon

## 5. TEST RESULTS

### 5.6 Output Terminal Conducted Spurious Emission Measurement

|                       |                                            |
|-----------------------|--------------------------------------------|
| EUT                   | Digital Cable Receiver / STB-100H (SN:N/A) |
| Limit apply to        | FCC Part15 Subpart B Section 15.115(b)(2)  |
| Test Date             | June 2, 2005                               |
| Operating Condition   | TV Mode (Channel 3, 4)                     |
| Environment Condition | Humidity Level : 35 %RH, Temperature : 18  |
| Result                | Passed by 11.13 dB                         |

#### Output Terminal Conducted Spurious Test Data

| Test Channel | Emission Frequency [MHz] | Meter Reading [dB $\mu$ V] | Correction Factor [dB] | Signal Level [dB $\mu$ V] | Limit [dB $\mu$ V] | Margin [dB] |
|--------------|--------------------------|----------------------------|------------------------|---------------------------|--------------------|-------------|
| 3            | 74.80                    | 11.78                      | 7.5                    | 19.28                     | 39.5               | 20.22       |
|              | 137.80                   | 14.20                      | 7.5                    | 21.70                     | 39.5               | 17.80       |
|              | 183.80                   | 16.80                      | 7.5                    | 24.30                     | 39.5               | 15.20       |
|              | 275.50                   | 20.87                      | 7.5                    | 28.37                     | 39.5               | 11.13       |
| 4            | 80.80                    | 11.29                      | 7.5                    | 19.79                     | 39.5               | 19.71       |
|              | 189.00                   | 14.66                      | 7.5                    | 21.26                     | 39.5               | 18.24       |
|              | 201.90                   | 14.93                      | 7.5                    | 22.43                     | 39.5               | 19.28       |
|              | 275.40                   | 13.49                      | 7.5                    | 20.99                     | 39.5               | 18.51       |

#### NOTES :

1. The correction factor consist of the insertion loss of the impedance matching transformer, the coaxial cable used for the test.
2. The spectrum was checked in each test mode and operation mode, and the maximum measured data were reported.
3. Emission Level = Meter Reading + Correction (Matching Loss + Cable loss)  
Margin value = Limit - Signal Level



Test Engineer : K.K. Yoon

## 5. TEST RESULTS

### 5.7 Antenna Transfer Switch Measurement

|                       |                                            |
|-----------------------|--------------------------------------------|
| EUT                   | Digital Cable Receiver / STB-100H (SN:N/A) |
| Limit apply to        | FCC Part15 Subpart B Section 15.115(c)(1)  |
| Test Date             | June 2, 2005                               |
| Operating Condition   | TV Mode (Channel 3, 4)                     |
| Environment Condition | Humidity Level : 35 %RH, Temperature : 18  |
| Result                | Passed                                     |

#### Antenna Transfer Switch Test Data

| Test Channel | Emission Frequency [MHz] | Meter Reading [dB $\mu$ V]           | Correction Factor [dB] | Result [dB $\mu$ V] | Limit [dB $\mu$ V] | Margin [dB] |
|--------------|--------------------------|--------------------------------------|------------------------|---------------------|--------------------|-------------|
| 3            | 61.25                    | During this test, no signal detected |                        |                     | 9.5                | -           |
| 4            | 67.25                    |                                      |                        |                     | 9.5                | -           |

#### NOTES :

1. No emission was observed during the test. The spectrum was checked in each test mode and operation mode. Transfer switch isolation measurements were made on the Channel 3 or 4 video output frequency of 61.25 or 67.25MHz and both positions of the transfer switch were checked for compliance.
2. To clarify the emissions emanated from ANT. input terminal on the EUT, RF pre-amplifier was used. The gain of pre-amplifier at each frequency measured from the EUT was obtained after sufficient warm-up for stabilization of gain. The correction factor consist of the insertion loss of the impedance matching transformer, the coaxial cable used for the test and the gain of pre-amplifier.
3. Result = Meter Reading + Correction Factor(Matching Loss + Cable loss)  
Margin value = Limit - Result
4. Spectrum analyzer setting : Frequency Span 1MHz, Resolution bandwidth 100 kHz, Video bandwidth 300 kHz, Detector function Peak mode.



Test Engineer : K.K. Yoon

## 6. SAMPLE CALCULATION

---

### Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V/m) = 20 \log_{10} (\mu V / m) : \text{Equation 1}$$

$$dB\mu V = dBm + 107 : \text{Equation 2}$$

Example : @459.25 MHz

$$\text{Class B Limit} = 46.00 \text{ dBuV/m}$$

$$\text{Reading} = 20.30 \text{ dBuV}$$

$$\text{Antenna Factor + Cable Loss} = 24.48 \text{ dB/m}$$

$$\text{Total} = 44.78 \text{ dBuV/m}$$

$$\text{Margin} = 46.00 - 44.78 = 1.22$$

$$= 1.22 \text{ dB below Limit}$$

## 7. List of Test Equipments used for Measurements

|                                     | Test Equipment    | Model           | Mfg.            | Serial No.   | Cal. Due Date |
|-------------------------------------|-------------------|-----------------|-----------------|--------------|---------------|
| <input checked="" type="checkbox"/> | Spectrum Analyzer | 7401A           | H.P             | US38440057   | 06.04.07      |
| <input checked="" type="checkbox"/> | Spectrum Analyzer | R3261A          | Advantest       | 21720033     | 05.10.26      |
| <input checked="" type="checkbox"/> | Receiver          | ESVS 10         | R & S           | 835165/001   | 06.04.07      |
| <input checked="" type="checkbox"/> | Spectrum Analyzer | 7405A           | H.P             | US41160290   | 05.10.18      |
| <input checked="" type="checkbox"/> | TEST Receiver     | ESPI            | Rohde & Schwarz | 100478       | 05.07.01      |
| <input checked="" type="checkbox"/> | LISN              | 3825/2          | EMCO            | 9006-1669    | 06.04.06      |
| <input checked="" type="checkbox"/> | LISN              | 3825/2          | EMCO            | 9208-1995    | 06-04-07      |
| <input checked="" type="checkbox"/> | LogBicon Antenna  | VULB9160        | Schwarz Beck    | 3082         | 05.07.27      |
| <input type="checkbox"/>            | LogBicon Antenna  | VULB9165        | Schwarz Beck    | 2023         | 05.07.06      |
| <input type="checkbox"/>            | Dipole Antenna    | VHAP            | Schwarz Beck    | 964          | 05.06.10      |
| <input type="checkbox"/>            | Dipole Antenna    | VHAP            | Schwarz Beck    | 965          | 05.07.09      |
| <input type="checkbox"/>            | Dipole Antenna    | UHAP            | Schwarz Beck    | 949          | 05.07.09      |
| <input type="checkbox"/>            | Dipole Antenna    | UHAP            | Schwarz Beck    | 950          | 05.06.10      |
| <input checked="" type="checkbox"/> | Turn-Table        | DETT-03         | Daeil EMC       | -            | N/A           |
| <input checked="" type="checkbox"/> | Antenna Master    | DEAM-03         | Daeil EMC       | -            | N/A           |
| <input type="checkbox"/>            | Plotter           | 7440A           | H.P             | 2725A 75722  | N/A           |
| <input checked="" type="checkbox"/> | Chamber           | DTEC01          | DAETONG         | -            | N/A           |
| <input checked="" type="checkbox"/> | RAM               | Rohde & Schwarz | Matching Pad    | 836964 / 009 | 05.10.18      |