

TEST REPORT

of

FCC Part 15 Subpart F §15.519

FCC ID : Q48-AUVS-3190-DM

Equipment Under Test : UWB Wireless VGA dongle
Model Name : AUVS-3190-DM
Serial No. : N/A
Applicant : ABCO
Manufacturer : ABCO
Date of Test(s) : 2013.08.19 ~ 2013.08.23
Date of Issue : 2013.09.26

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date:

2013.09.26

Hyunchoe You

Approved By:



Date:

2013.09.26

Feel Jeong

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

INDEX

Table of contents

1. General information -----	3
2. Operational Limitations -----	7
3. Radiated emissions -----	8
4. Radiated emissions in GPS Bands -----	14
5. Occupied Bandwidth -----	19
6. Peak Emissions within a 50 MHz Bandwidth -----	24
7. Transmitter AC Power Line Conducted Emission-----	26
8. Antenna Requirement -----	31

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 400-2, Gomae-dong, Giheung-gu, Yongin-si, Gyeonggi-do, Korea 446-901

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Telephone : +82 31 8007 5376

FAX : +82 31 8007 5369

1.2. Details of Applicant

Applicant : ABCO

Address : 31, Dunchon-daero 388 Beon-gil, Jungwon-gu, Seongnam-si Gyeonggi-do, Korea

Contact Person : Hyun Soo, Kim

Phone No. : +82-31-730-5188

1.3. Details of Factory Information

Applicant : ABCO

Address : 31, Dunchon-daero 388 Beon-gil, Jungwon-gu, Seongnam-si Gyeonggi-do, Korea

1.4. Description of EUT

Kind of Product	UWB Wireless VGA dongle
Model Name	AUVS-3190-DM
Serial Number	N/A
Power Supply	DC 5 V
Frequency Range	3 168 MHz ~ 4 752 MHz
Modulation Technique	MB-OFDM
Number of Channels	3 Sub-band (please refer to the section 1.10)
Antenna Type	Internal type (Chip Antenna)

1.5. Declaration by the manufacturer

-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.6. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal Date	Cal Interval	Cal Due.
Signal Generator	R&S	SMR40	100540	Jan. 08, 2013	Annual	Jan. 08, 2014
Spectrum Analyzer	R&S	FSV30	101004	Jul. 20, 2013	Annual	Jul. 20, 2014
Spectrum Analyzer	Agilent	N9030A	MY53120526	Jul. 30, 2013	Annual	Jul. 30, 2014
Low Pass Filter	Mini circuits	NLP-1200+	V9500401023-1	Jul. 02, 2013	Annual	Jul. 02, 2014
Preamplifier	H.P.	8447D	1726A01265	Sep.17, 2012	Annual	Sep.17, 2013
Preamplifier	MITEQ Inc.	JS44-18004000-35-8P	1546891	Jun. 13, 2013	Annual	Jun. 13, 2014
Preamplifier	MITEQ Inc.	AFS42-00101800-25-S	900699	Jul. 07, 2013	Annual	Jul. 07, 2014
Test Receiver	R & S	ESCI7	100778	Feb. 15, 2013	Annual	Feb. 15, 2014
Bilog Antenna	SCHWARZBECK	VULB9163	9163-390	Apr. 19, 2012	Biennial	Apr. 19, 2014
Turn Table	DT-3000S-3T	INN-CO	N/A	N.C.R.	N.C.R.	N.C.R.
Test Receiver	ESCI7	R&S	100778	Feb. 15, 2013	Annual	Feb. 15, 2014
Horn Antenna	R&S	HF906	100608	Aug. 13, 2012	Biennial	Aug. 13, 2014
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170431	May 15, 2012	Biennial	May 15, 2014
Antenna Master	MA4000-EP	INN-CO	N/A	N.C.R.	N.C.R.	N.C.R.
Anechoic Chamber	SY Corporation	L x W x H (21.5 m x 13.0 m x 9.0 m)	N/A	N.C.R.	N.C.R.	N.C.R.
EMI Test Receiver	R & S	ESU8	100128	Jan. 25, 2013	Annual	Jan. 25, 2014
Two-Line V-Network	R & S	ENV216	101180	May 15, 2013	Annual	May 15, 2014

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.7. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part15 Subpart C § 15.519		
Standard section	Test Item(s)	Result
15.519(a)	Operational Limitations	-
15.519(c) /15.209	Radiated Emissions	Complied
15.519(d)	Radiated Emissions in GPS Bands	Complied
15.519(b)	UWB Bandwidth	Complied
15.519(e)	Peak Emissions within a 50 MHz Bandwidth	Complied
15.207	Transmitter AC Power Line Conducted Emission	Complied
15.203	Antenna Requirement	Complied

1.8. Test Procedure(s)

The measurement procedures described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003)

1.9. Sample calculation

Where relevant, the following sample calculation is provided:

1.9.1. Radiation test

Field strength level (dB μ V/m) = Measured level (dB μ V) + Antenna factor (dB) + Cable loss (dB) - amplifier gain(dB)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.10. Test mode description

Test Mode	Sub-band	Frequency (MHz)
1	1	3 432
2	2	3 960
3	3	4 488

Note.

After pre-testing each mode, the worst mode 3 was the worst situation and only the data was presented in the following sections

< Except for "Radiated Emissions in GPS Bands", "UWB Bandwidth Measurement", "Peak Emission Measurement">.

EUT configure mode	Applicable to					Description
	RE<1G	RE≥1G	GPS	UB	PE	Frequency (MHz)
1	-	-	√	√	√	3 432
2	-	-	√	√	√	3 960
3	√	√	√	√	√	4 488

Where **RE<1G** : Radiated Emission below 1 GHz

UB : UWB Bandwidth

GPS : Radiated Emissions in GPS Bands

RE≥1G : Radiated Emission above 1 GHz

PE : Peak Emission

1.11. Test report revision

Revision	Report number	Description
0	F690501/RF-RTL006899	Initial
1	F690501/RF-RTL006899-1	Revise the calibration date

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2. Operational Limitations

2.1. Test result of Operational restriction


Operation Restriction	Informed the applicant	Not applicable	User Manual informed	Passed
■ 47 CFR FCC Part 15 Subpart F 15.519(a)				
UWB devices operating under the provisions of this section must be hand held, i.e., they are relatively small devices that are primarily hand held while being operated and do not employ a fixed infrastructure. [A transmitter that had been connected to portable device e.g. Laptop PC... and be considered sufficient to demonstrate not a fixed infrastructure application.]	■			■
(1) The radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver				
A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting. [The applicant has been informed of this requirement]	■			■
(2) Outdoor mounted antennas				
The use of antennas mounted on outdoor structures, e.g., antennas mounted on the outside of a building or on a telephone pole, or any fixed outdoors infrastructure is prohibited. Antennas may be mounted only on the hand held UWB device. [The applicant has been informed of this requirement. Also this product's antenna type is chip antenna.]	■			■
(5) Indoors or Outdoors				
UWB devices operating under the provisions of this section may operate indoors or outdoors. [The applicant has been informed of this requirement.]	■			■

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


3. Radiated Emissions

3.1. Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

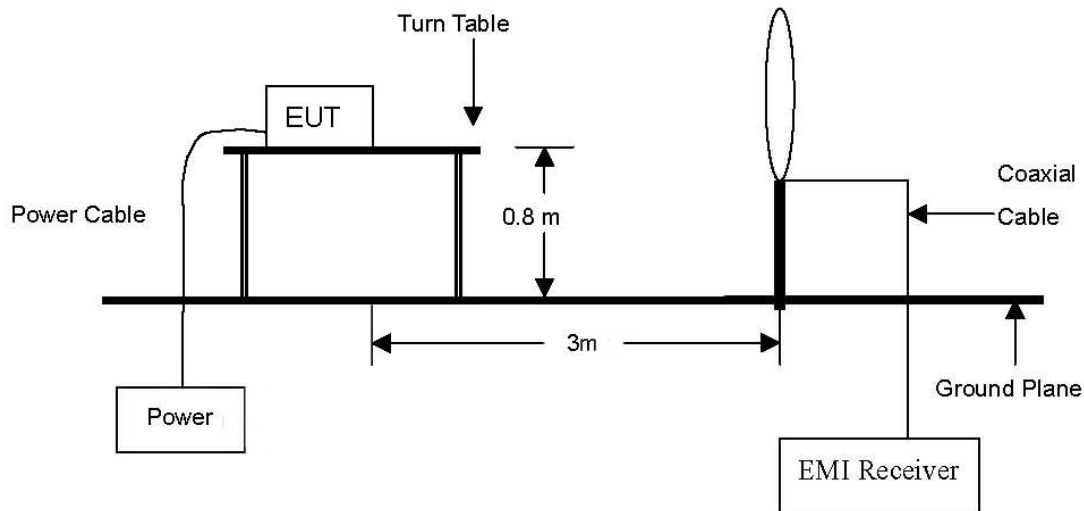


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

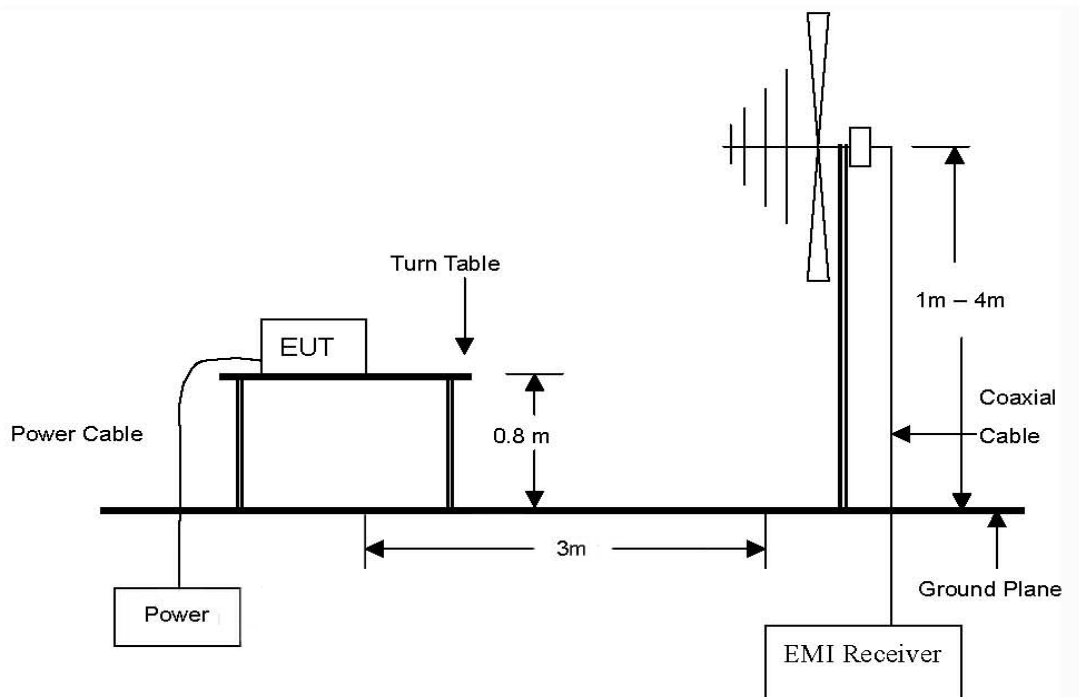

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

The diagram below shows the test setup that is utilized to make the measurements for emission. The spurious emissions were investigated from 1 GHz to the 10th harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

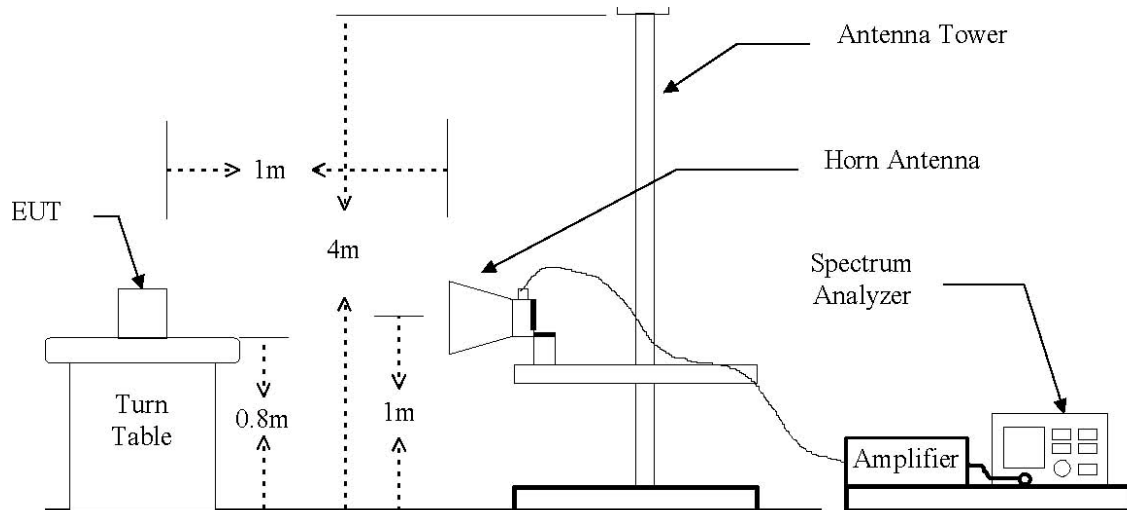

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3.2. Limit

3.2.1. Radiated emission limits, general requirements

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 -88	100**	3
88 -216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241

The radiated emissions above 960 MHz from a device shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Freq. (MHz)	EIRP (dB m)	E- Field (dBμV/m) at 3 m	E- Field (dBμV/m) at 1 m
960-1 610	-75.3	19.9	29.44
1 610-1 990	-63.3	31.9	41.44
1 990-3 100	-61.3	33.9	43.44
3 100-10 600	-41.3	53.9	63.44
10 600 above	-61.3	33.9	43.44

Note 1: This may be converted to a peak field strength level at 3 meters using $E(\text{dB}\mu\text{V}/\text{m}) = P(\text{dB m EIRP}) + 95.2 \text{ dB}$.

Note 2: Above 960 MHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3 m to 1 m. Distance extrapolation factor = $20 \log(\text{specific distance [3 m]} / \text{test distance [1 m]})$ (dB); Limit line = specific limits (dBμV/m) + distance extrapolation factor [9.54 dB].

From 47 CFR Section 15.521(c): Emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in Section 15.209 of this chapter, rather than the limits specified in this subpart, provided it can be clearly demonstrated that those emissions from the UWB device are due solely to emissions from digital circuitry contained within the transmitter and that the emissions are not intended to be radiated from the transmitter's antenna. Emissions from associated digital devices, as defined in Section 15.3(k) of this chapter, e.g., emissions from digital circuitry used to control additional functions or capabilities other than the UWB transmission, are subject to the limits contained in Subpart B of Part 15 of this chapter. The radiated emissions from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3.3. Test Procedures

- a. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable for measured the frequency range below 960 MHz and antenna tower was placed below 1 meters far away from the turntable for measured the frequency range above 960 MHz
- b. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- c. The height of the broadband and receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- d. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- e. The measurements made over the frequency range from 9 kHz to 960 MHz were maximized using an EMI receiver with peak detector capabilities. Measurements of the radiated field from 9 kHz to 960 MHz were made with the measurement antenna located a distance of 3 meters from the EUT. If the emissions level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1 GHz .
- f. Measurements above 960 MHz were maximized using a spectrum analyzer with RMS detector capabilities. A spectrum analyzer was used for the final measurements utilizing an RMS detector at the frequencies with the largest amplitudes. The prescribed RBW of 1 MHz and VBW of 3 MHz, and a1 msec averaging time were used for these measurements. Measurements of the radiated field at frequencies above 960 MHz were made with the measurement antenna located a distance of below 1 meter from the EUT.
- g. The spectrum between 9 kHz and 960 MHz contained no intentional radiation and lies below the limits. The spectrum from 960 MHz to 18 GHz contained intentional UWB signals between 3100 MHz and 10600 MHz and lie below the limits. No other emissions above 10 600 MHz were detected. The maximum frequency tested was 40 GHz .
- h. Per 47 CFR, Part 15, Subpart F, §15.521© (§15.209) all digital emissions from the transmitter not intended to be radiated from the antenna port meet the 15.209 subpart C limits.
- i. Additional measurements in the 960 MHz to 40 GHz range were performed to determine the nature of all unintentional emissions in this span. Conducted antenna port measurement and terminated antenna port measurement were done in the 960 MHz to 8 GHz range show that all noise peaks have the same frequency and polarization and are determined to be emission from the digital circuit and are not radiated from the antenna.

The spectrum analyzer is set to:

Frequency = 1000 MHz ~ 10th carrier harmonic or 40 GHz

RBW = 1 MHz

Span = auto

VBW = 3 MHz (VBW ≥ RBW)

Sweep = 1 msec averaging time were used for these measurement frequencies

Detector function = RMS or Average

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3.4. Test Results

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

3.4.1. Radiated Emission (Worst case_Bandgroup1_ Sub-band 3)

The frequency spectrum from 30 MHz to 960 MHz was investigated. Emission levels are not reported much lower than the limits by over 30 dB. All reading values are peak values.

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
32.52	35.33	Peak	H	12.31	-24.56	23.08	40.0	16.92
74.62	25.08	Peak	H	8.60	-24.16	9.52	40.0	30.48
172.59	28.32	Peak	H	9.31	-23.02	14.61	43.5	28.89
665.93	31.33	Peak	V	19.51	-22.11	28.73	46.0	17.27
Above 700.00	Not detected	-	-	-	-	-	-	-

Remark:

1. This test would be performed in the 3 m distance
2. Actual = Reading + AF + AMP + CL

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3.4.2. Spurious Radiated Emission

The frequency spectrum above 960 MHz was investigated. Emission levels are not reported much lower than the limits by over 30 dB. Sub-band 3 is worst case

Operating Mode: Sub-band 3

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
*1 194.00	48.85	Average	V	24.93	-37.92	35.86	54.00	18.14
*1 224.00	48.55	Average	V	25.02	-37.86	35.71	54.00	18.29
*1 570.00	49.95	Average	V	26.06	-37.15	38.86	54.00	15.14
*1 599.00	48.72	Average	V	26.15	-37.10	37.77	54.00	16.23
4 257.00	45.65	RMS	V	32.60	-32.21	46.04	63.44	17.40
Above 4 300.00	Not detected	-	-	-	-	-	-	-

Remarks;

1. “*” means the digital circuitry frequency, * emissions from digital circuitry used to enable the operation of the UWB transmitter shall comply with the limits in 47 CFR, Part 15, Subpart C, §15.209
2. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + AF + AMP + CL
5. The test are measured in the 1 m distance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4. Radiated Emissions in GPS Bands

4.1. Test Setup

Same as section 3.1. of this report

4.2. Limit

In addition to the radiated emission limits specified in the table in paragraph 4.5.1 of this report, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz .

Freq. (MHz)	EIRP (dB m)	E- Field (dB μ V/m) at 3m	E- Field (dB μ V/m) at 1m
1 164-1 240	-85.3	9.9	19.44
1 559-1 610	-85.3	9.9	19.44

Note 1: This may be converted to a peak field strength level at 3 meters using $E(\text{dB}\mu\text{V/m}) = P(\text{dB m EIRP}) + 95.2 \text{ dB}$. Note 2: Above 960 MHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3 m to 1 m. Distance extrapolation factor = $20 \log (\text{specific distance [3 m]} / \text{test distance [1m]}) (\text{dB})$; Limit line = specific limits (dB μ V/m) + distance extrapolation factor [9.54 dB].

4.3. Test Procedures

- Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1 meters far away from the turntable.
- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband and receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Measurements frequencies were maximized using a spectrum analyzer with RMS detector capabilities. A spectrum analyzer was used for the final measurements utilizing an RMS detector at the frequencies with the largest amplitudes. The prescribed RBW of 10 kHz and VBW of 10 kHz , and a 1 msec averaging time were used for these measurements.
- Per 47 CFR, Part 15, Subpart F, §15.521© (§15.209) all digital emissions from the transmitter not intended to be radiated from the antenna port meet the 15.209 subpart C limits.

The spectrum analyzer is set to:

frequency = 1 164~1 240 MHz / 1 559~1 610 MHz

RBW = 10 kHz

VBW = 10 kHz (VBW \geq RBW)

Detector function = RMS

Span = auto

Sweep = 1 msec averaging time were used for these measurement frequencies

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operating Mode: 1 164-1 240 MHz for GPS band at 1 m
A. Sub-band 1 (3 432 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 196.00	30.21	RMS	V	24.93	-37.93	17.21	19.44	2.23
1 209.00	30.06	RMS	V	24.97	-37.90	17.13	19.44	2.31

B. Sub-band 2 (3 960 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 196.00	29.65	RMS	V	24.93	-37.93	16.65	19.44	2.79
1 209.00	29.45	RMS	V	24.97	-37.90	16.52	19.44	2.92

C. Sub-band 3 (4 488 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 176.00	27.35	RMS	V	24.87	-37.96	14.26	19.44	5.18
1 224.00	24.55	RMS	V	25.02	-37.86	11.71	19.44	7.73

Remarks;

- Actual = Reading + AF + AMP + CL
- The test are measured in the 1 m distance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Operating Mode: 1 559-1 610 MHz for GPS band at 1 m
A. Sub-band 1 (3 432 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 570.00	28.27	RMS	V	26.06	-37.15	17.18	19.44	2.26
1 599.00	26.32	RMS	V	26.15	-37.10	15.37	19.44	4.07

B. Sub-band 2 (3 960 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 570.00	26.95	RMS	V	26.06	-37.15	15.86	19.44	3.58
1 599.00	25.65	RMS	V	26.15	-37.10	14.70	19.44	4.74

C. Sub-band 3 (4 488 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 570.00	25.54	RMS	V	26.06	-37.15	14.45	19.44	4.99
1 599.00	24.84	RMS	V	26.15	-37.10	13.89	19.44	5.55


Remarks;

- Actual = Reading + AF + AMP + CL
- The test are measured in the 1 m distance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5. UWB Bandwidth

5.1. Test Setup

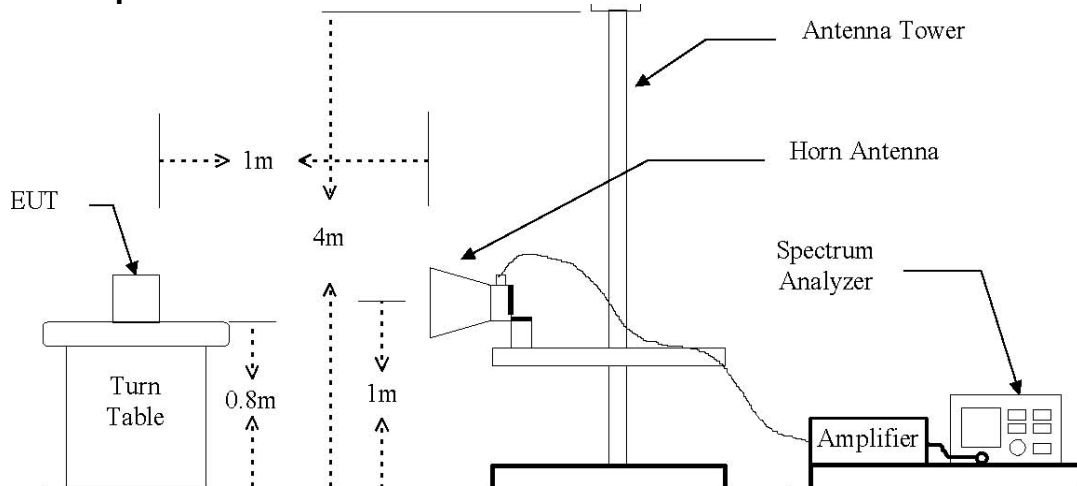

5.2. Limit

Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

The UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated f_H and the lower boundary is designated f_L . The frequency at which the highest radiated emission occurs is designated f_M .

Center frequency. The center frequency, f_c , equals $(f_H + f_L)/2$.

Fractional bandwidth. The fractional bandwidth equals $2(f_H - f_L)/(f_H + f_L)$. The UWB bandwidth of a UWB system operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

5.3. Test Procedure

1. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. The horn receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
3. For maximum emission amplitude, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading and was used to determine the frequency at which the highest radiated emission occurs, f_M . Next, the points that are 10 dB or more below the highest radiated emission were observed in a search from f_M in both the lower and higher frequency direction in the measured frequency EIRP graph, they are denoted as f_L and f_H , respectively. The UWB bandwidth is the difference between f_L and f_H .

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4. The individual UWB bandwidths were measured for each BAND_ID (nb) of the UWB spectrum. Both horizontal and vertical polarizations were taken into account to determine the full UWB BW on the maximized (in azimuth and elevation) signals.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 10 MHz

VBW = 10 MHz (VBW ≥ RBW)

Trace = max hold

Sweep = auto

Detector function = peak

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory)

18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

www.ee.sgs.com/korea

RTT5041-20(2013.07.27)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

A4(210mm x 297mm)

5.4. Test Results

Ambient temperature : (23 ± 2) °C
Relative humidity : 47 % R.H.

Operation Mode	Channel	Channel Frequency (MHz)	UWB Bandwidth (MHz)
Band Group 1	Sub-band 1	3 432	510.6
	Sub-band 2	3 960	507.1
	Sub-band 3	4 488	507.0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040 www.ee.sgs.com/korea


RTT5041-20(2013.07.27)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2371


A4(210mm x 297mm)

UWB Bandwidth

Sub-band 1

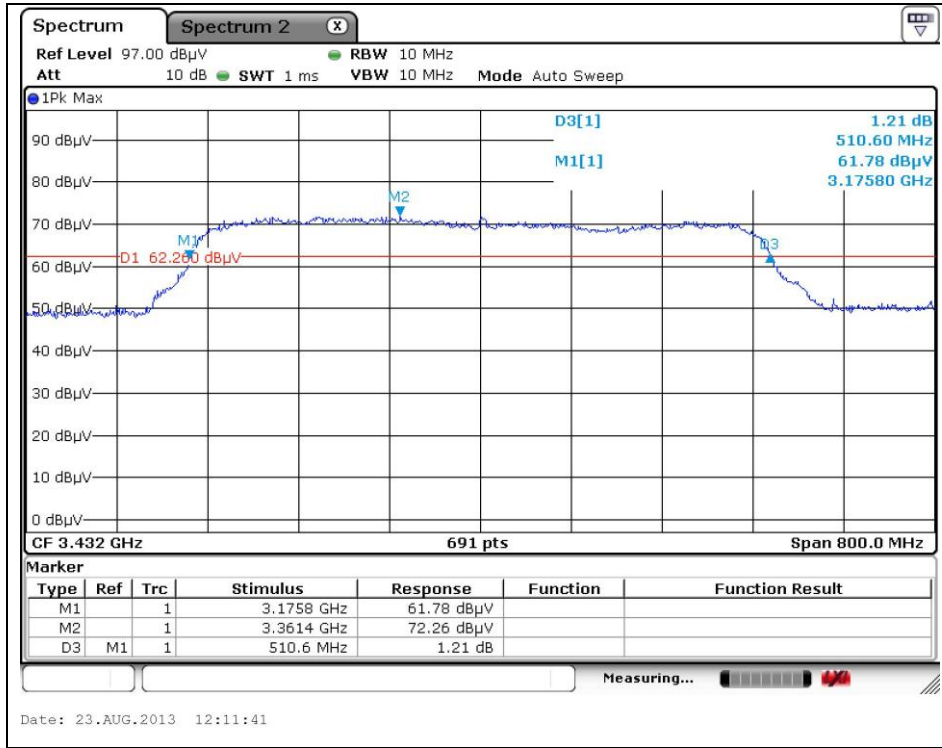


Sub-band 2

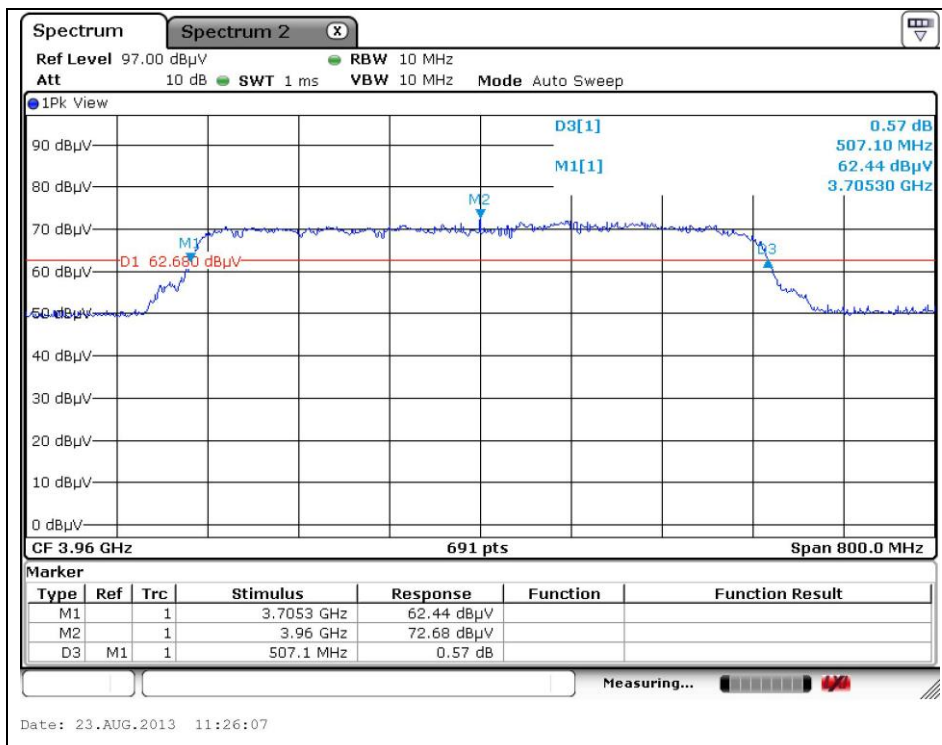

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Sub-band 3

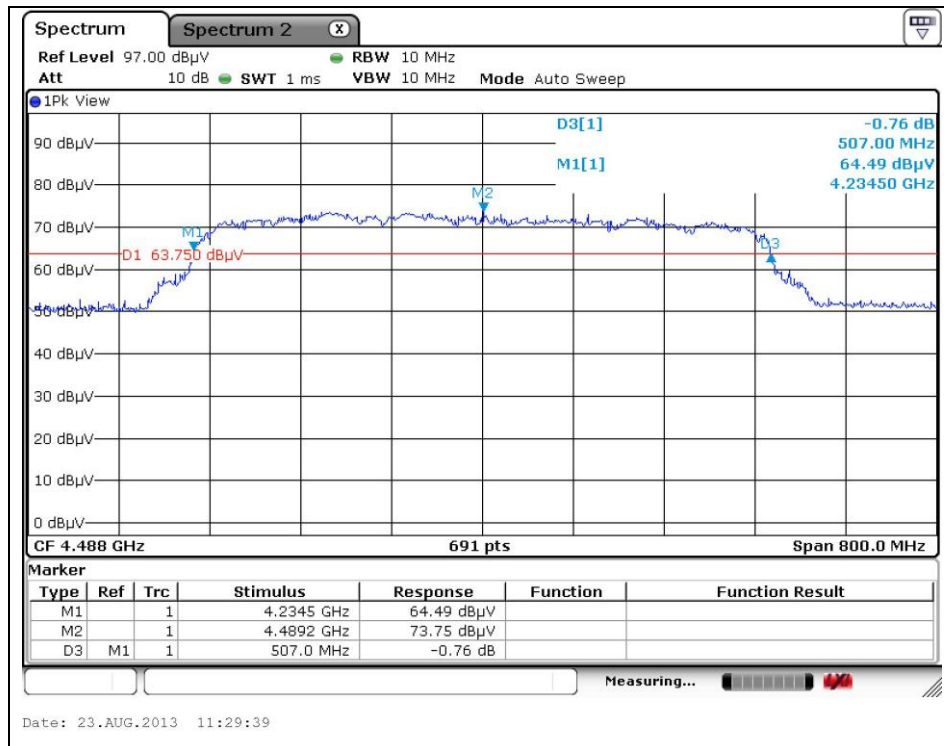

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6. Peak Emissions within a 50 MHz Bandwidth

6.1. Test Setup

Same as section 5.1. of this report

6.2. Limit

There is a limit on the peak level of the emissions contained within a 10 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_m . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, EIRP limit has to be adjusted by the resolution bandwidth ratio of $20\log(RBW/50)$ dB, where RBW is the resolution bandwidth used for the measurement expressed in MHz. In addition, This may be converted to a peak field strength level at 3 meters using $E(\text{dB}\mu\text{V/m}) = P(\text{dBm EIRP}) + 95.2 \text{ dB}$. And Peak emission shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m. Distance extrapolation factor = $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$ (dB); Limit line = specific limits (dB μV) + distance extrapolation factor [9.54 dB]

Peak EIRP limit dBm (RB / VB : 50 MHz)	Peak EIRP limit dBm (RB / VB: 10 MHz)	E- Field (dB $\mu\text{V/m}$) at 3m (RB / VB: 10 MHz)	E- Field (dB $\mu\text{V/m}$) at 1 m (RB / VB: 10 MHz)
0	-13.97	81.23	90.77

6.3. Test Procedure

1. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1 meters far away from the turntable.
2. The horn receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
3. For maximum peak emission amplitude, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading and was used to determine the frequency at which the highest radiated emission occurs, f_m .
4. The individual UWB bandwidths were measured for each BAND_ID (nb) of the UWB spectrum. Both horizontal and vertical polarizations were taken into account to determine the full UWB BW on the maximized (in azimuth and elevation) signals.
5. A spectrum analyzer was used for the final measurement utilizing a peak detector at the frequency with the largest amplitude. The prescribed resolution bandwidth of 50 MHz was not supported by the spectrum analyzer. However, when a peak measurement is required, The resolution bandwidth for this measurement was set to 10 MHz, and the measurement was centered on the frequency at which the highest radiated emission occurred, f_m . The video bandwidth was 10 MHz.

The spectrum analyzer is set to:

RBW = 10 MHz

Span = 600 MHz

VBW = 10 MHz

Sweep = auto

Detector function = peak

Trace = max hold

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.4. Test Results

Ambient temperature : (23 ± 2) °C
Relative humidity : 47 % R.H.

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
3 432	73.68	Peak	V	30.86	-33.51	71.03	90.77	19.74
3 960	73.54	Peak	V	32.21	-32.55	73.20	90.77	17.57
4 488	74.40	Peak	V	32.85	-31.78	75.47	90.77	15.30
3 432	72.90	Peak	H	30.86	-33.51	70.25	90.77	20.52
3 960	72.87	Peak	H	32.21	-32.55	72.53	90.77	18.24
4 488	73.18	Peak	H	32.85	-31.78	74.25	90.77	16.52


Remarks;

- Actual = Reading + AF + AMP + CL

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

7. Transmitter AC Power Line Conducted Emission

7.1. Test Setup

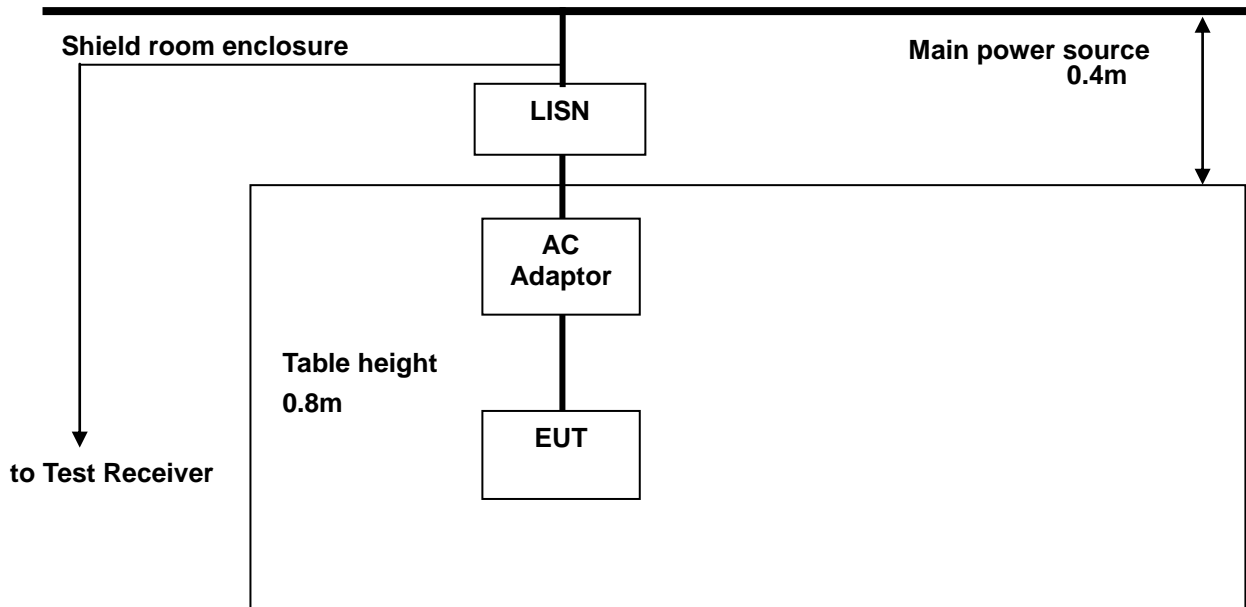

7.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

* Decreases with the logarithm of the frequency.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

7.3. Test Procedures

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

AC line conducted emissions from the EUT were measured according to the dictates of ANSI C63.4-2003

1. The test procedure is performed in a 6.5m × 3.6m × 3.6m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m(W) × 1.5 m(L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. The excess power cable between the EUT and the LISN was bundled. All connecting cables of EUT were moved to find the maximum emission.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

7.4. Test Results (Worst case_Bandgroup1_ Sub-band 3)

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Ambient temperature : (23 ± 2) °C
Relative humidity : 47 % R.H.

Frequency range : 0.15 MHz – 30 MHz
Measured Bandwidth : 9 kHz

FREQ. (MHz)	LEVEL(dB μ V)		LINE	LIMIT(dB μ V)		MARGIN(dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.42	29.86	19.40	N	57.45	47.45	27.59	28.05
0.84	19.49	10.53	N	56.00	46.00	36.51	35.47
3.93	14.19	9.39	N	56.00	46.00	41.81	36.61
9.71	12.57	8.08	N	60.00	50.00	47.43	41.92
24.36	15.84	9.68	N	60.00	50.00	44.16	40.32
26.67	21.36	10.98	N	60.00	50.00	38.64	39.02
0.26	38.41	23.71	H	61.43	51.43	23.02	27.72
0.47	31.61	24.78	H	56.51	46.51	24.90	21.73
0.89	19.42	13.61	H	56.00	46.00	36.58	32.39
3.39	17.41	11.88	H	56.00	46.00	38.59	34.12
24.00	17.12	11.09	H	60.00	50.00	42.88	38.91
27.68	16.96	9.56	H	60.00	50.00	43.04	40.44


Note ;

- Line (H): Hot, Line (N): Neutral
- All modes of operation were investigated and the worst-case emissions are reported using Test mode 3
- The limit for Class B device(s) from 150 kHz to 30 MHz are specified in Section of the Title 47 CFR.
- Traces shown in plot mad using a peak detector and average detector
- Deviations to the Specifications: None.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


Plots of Conducted Power line

Test mode : (Neutral)

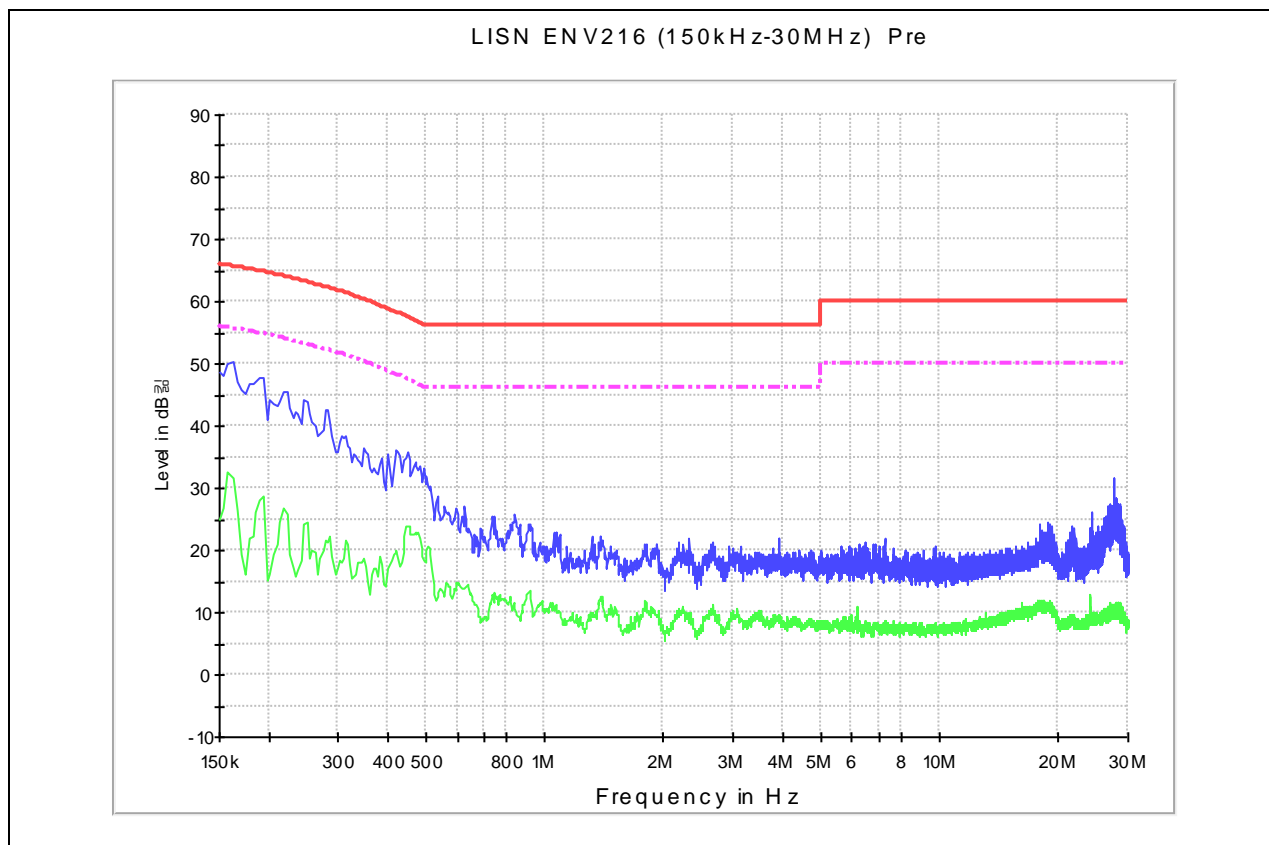

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Test mode : (Hot)

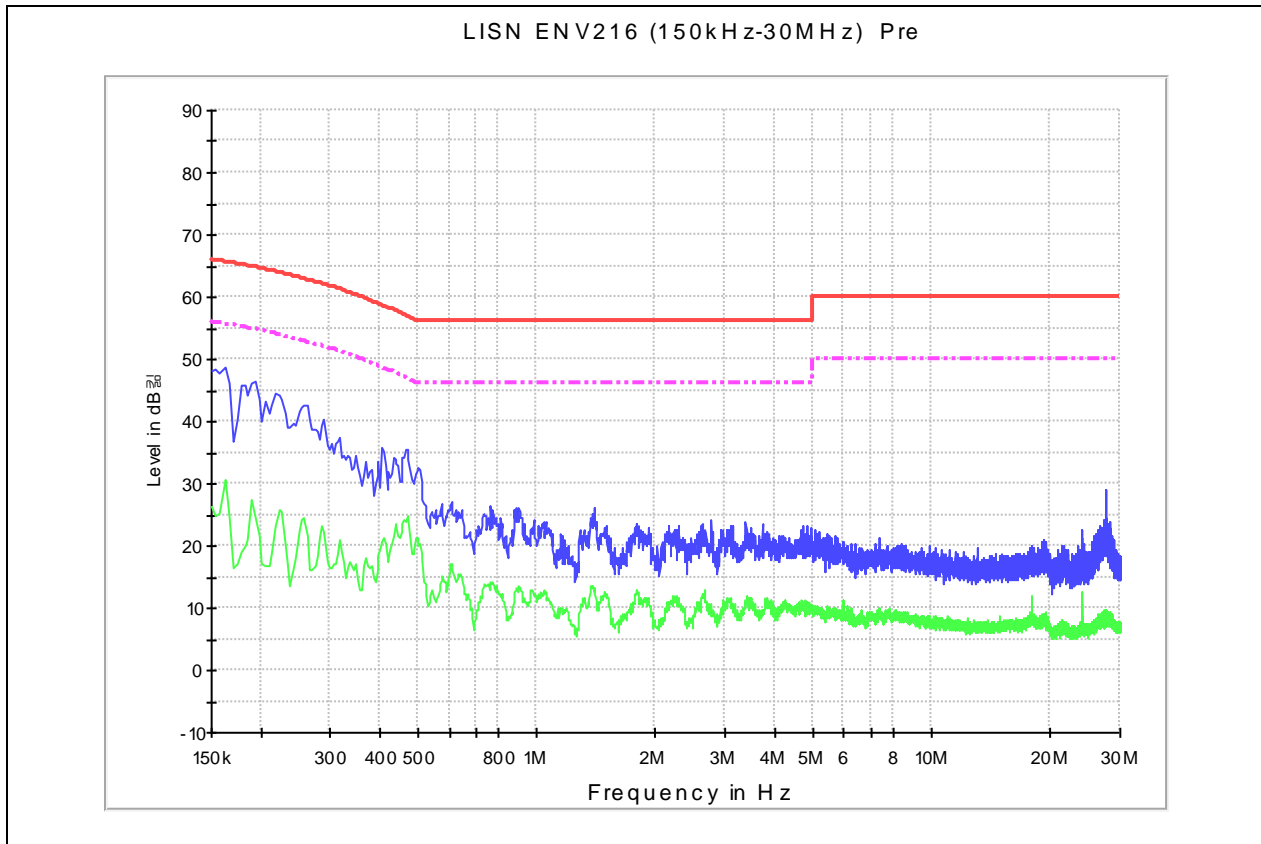

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

8. Antenna Requirement

8.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2. Antenna Connected Construction

Antenna used in this product is Integral Chip type

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.