

A

 SIEMIC, Inc. Accessing global markets		Serial# SL08111401-WAT-001 (15.247)
Title: RF Test Report of WattStopper	Issue Date 22 December 2008	Page 2 of 62
To: Model: DRD40	www.siemic.com	
FCC 15.247 2008		

SIEMIC ACREDITATION DETAILS: A2LA Certificate Number: 2742.01

		THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION
ACCREDITED LABORATORY		
A2LA has accredited		
SIEMIC LABORATORIES		
San Jose, CA		
for technical competence in the field of		
Electrical Testing		
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 <i>General Requirements for the Competence of Testing and Calibration Laboratories</i> . This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-LAF Communiqué dated 18 June 2005).		
	Presented this 11th day of July 2008.	
	 _____ President	
	For the Accreditation Council Certificate Number 2742.01 Valid to September 30, 2010	
For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.		

SIEMIC ACREDITATION DETAILS: FCC Registration No. 783147**FEDERAL COMMUNICATIONS COMMISSION**

Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046

December 20, 2007

Registration Number: 783147

SIEMIC Laboratories
2206 Ringwood Avenue,
San Jose, CA 95131

Attention: Leslie Bai

Re: Measurement facility located at San Jose
3 & 10 meter site
Date of Renewal: December 20, 2007

Dear Sir or Madam:


Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Phyllis Parrish
Industry Analyst

SIEMIC ACREDITATION DETAILS: Industry of Canada Registration No. 4842-1



May 23rd, 2008

OUR FILE: 46405-4842

Submission No: 126429

Siemic Inc.
2205 Ringwood Ave.
San Jose CA 95131
USA

Attention: Leslie Bai

Dear Sir/Madame:

The Bureau has received your application for the registration / renewal of a 310m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (**4842A-1**). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please be informed that the Bureau is now utilizing a **new site numbering scheme** in order to simplify the electronic filing process. Our goal is to reduce the number of secondary codes associated to one particular company. The following changes have been made to your record.

- Your primary code is: **4842**
- The company number associated to the site(s) located at the above address is: **4842A**
- The table below is a summary of the changes made to the unique site registration number(s):

New Site Number	Obsolete Site Number	Description of Site	Expiry Date (YYYY-MM-DD)
4842A-1	4842-1	5m Chamber	2010-05-23

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 meter OATS or 3 meter chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to exceed two years. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL:
http://strategis.gc.ca/2pic/internet/inceb-Mst.nsf/enb_n00052e.html.

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca. Please reference our file and submission number above for all correspondence.

Yours sincerely,



S. Pouly
Test & Measurement Specialist
Certification and Engineering Bureau
3700 Cawthra Ave., Building 94
Mississauga, Ontario L4W 5S2

SIEMIC ACREDITATION DETAILS: Japan VCCI Registration No. 2195



Voluntary Control Council for Interference
by Information Technology Equipment
7F NOA Bldg. 2-3-5, Azabudai,
Minato-Ku, Tokyo, Japan, 106-0041
Tel+81-3-5575-3138
Fax+81-3-5575-3137
<http://www.vccj.or.jp>

February 12, 2004

TO: SIEMIC, INC.

Membership NO: 2195

We confirmed your payment for annual membership fee and admission fee. Thank you very much for your remitting.

Please find enclosed VCCI documents. As admission fee and annual membership fee were confirmed, your company registered as VCCI official member.

From now on, it is possible for your company to submit conformity verification report or/and application for registration of measurement facilities.

Please find necessary forms for your submission from VCCI web-site.
www.vccj.or.jp

When you submit conformity verification report, please submit to Ms. Yoko Inagaki / inagaki@vccj.or.jp and application for registration of measurement facilities, please submit to Mr. Masaru Denda / denda@vccj.or.jp

Their address, phone and fax number are absolutely same as I. Please refer address indicated on top right-hand corner of this page.

If you have any other questions regarding membership, feel free to contact me. Thank you very much.

Best Regards,

Naoko Hori (Ms.)
VCCI
hori@vccj.or.jp

Enclosure

**SIEMIC, Inc.**

Accessing global markets

Title: RF Test Report of WattStopper
Model: DRD40
To: FCC 15.247 2008

Serial# SL08111401-WAT-001 (15.247)
Issue Date 22 December 2008
Page 6 of 62
www.siemic.com

SIEMIC ACREDITATION DETAILS: Japan RF Technologies Accreditation No. MRF050927

RFT	
<h1>Certificate</h1>	
<p>This is to certify that the Quality Management System of</p>	
<p>SIEMIC , Inc. 2206 Ringwood Avenue San Jose, California 95131 U.S.A</p>	
<p>has been authorized to carry out Japan Specified Radio Equipment test by order and under supervision of RF Technologies Co., Ltd. according to Notification No.88 of Radio Law.</p>	
<p>An assessment of the laboratory was conducted according to the "Procedure and Conditions for Appointments of 2.4GHz Band Low power data communications system that Bluetooth and Wireless LAN test with reference to ISO/IEC 17025 by an RF Technologies Co., Ltd. auditor.</p>	
<p>Audit Report No. MRF050927</p>	
 Kazuyuki Sarashina Auditor RF Technologies Co., Ltd.	 Toshihiro Hiramami President RF Technologies Co., Ltd.
Audit Date September 27th, 2005	Issued Date October 5th, 2005
<p>This Certificate is valid until September 26th 2006 or next schedule audit.</p>	
<p>No:006 Registered Certification Body RF Technologies Co., Ltd. 472, Nippa-cho,Kohoku-ku, Yokohama, 223-0057, Japan</p>	
	

SIEMIC ACREDITATION DETAILS: Korea MIC Lab Code: KR0032

시험기관지정서

Certificate

of Designated Testing Laboratory

지정번호(No.) : KR0032

시험기관명 : (주)현대고정인증기술원

(Name of Lab.) (Hyundai Calibration & Certification Technologies Co., Ltd)

주 소 : 경기도 이천시 부발읍 아미리 산136-1

(Address) (136-1, Ami-ri, Bubal-eup, Icheon-si, Kyunggi-Do, Korea)
2206 Ringwood Avenue San Jose, CA, USA.

시험분야 및 범위 : 유선(Telecommunication Part)

(Area & Category) 무선(Radio Communication Part)

전자파장해(EMD) : 미국지사 포함

전자파내성(EMS) : 미국지사 포함

전기안전(Safety)

전자파흡수율(SAR)

위 기관을 정보통신기기시험기관지정및관리등에관한규칙에
의해 정보통신기기시험기관으로 지정합니다.


*This is to certify that
the above mentioned laboratory is designated
as the testing laboratory in accordance with
the Regulations on Designation of Testing Laboratory
for Information and Communication Equipment.*

2005년(Year) 7월(Month) 5일(Date)

전파연구소장

Director General of Radio Research Laboratory
Ministry of Information and Communication
Republic of Korea

SIEMIC ACREDITATION DETAILS: Korea CAB ID: US0160



UNITED STATES DEPARTMENT OF COMMERCE
National Institute of Standards and Technology
 Gaithersburg, Maryland 20899

April 17, 2006

Mr. Leslie Bai
 SIEMIC Laboratories
 2206 Ringwood Avenue
 San Jose, CA 95131

Dear Mr. Bai:

I am pleased to inform you that your laboratory has been recognized by the Ministry of Information and Communication's Radio Research Laboratory (RRL) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, **Phase I** Procedures, of the APEC Tel MRA. The pertinent information about your laboratory's designation is as follows:


CAB Name: **SIEMIC Laboratories**
 Identification No.: **US0160**
 Scope:

Coverage	Standards	Date of Recognition
Electro Magnetic Interference	1. RRL Notice No. 2005-82: Technical Requirements for Electromagnetic Interference 2. Annex 8(KN-22), RRL Notice No. 2005-131: Conformity Assessment Procedure for Electromagnetic Interference	April 13, 2006
Electro Magnetic Susceptibility	1. RRL Notice No. 2005-130: Technical Requirements for Electromagnetic Susceptibility 2. Annex 1-7(KN-61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11), RRL Notice No. 2005-132: Conformity Assessment Procedure for Electromagnetic Susceptibility	April 13, 2006

You may submit test data to RRL to verify that the equipment to be imported into Korea satisfies the applicable requirements. The designation of your organization will remain in force as long as its accreditation for the designated scope remains valid and comply with the designation requirements.


The names of all recognized CABs will be posted on the NIST website at <http://ts.nist.gov/mra>. If you have any questions please contact Mr. Jogindar (Joe) Dhillon at (301) 975-5521. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,




David F. Alderman
 Group Leader, Standards Coordination and Conformity Group

cc: Jogindar Dhillon



SIEMIC ACREDITATION DETAILS: Taiwan BSMI Accreditation No. SL2-IN-E-1130R



UNITED STATES DEPARTMENT OF COMMERCE
National Institute of Standards and Technology
Gaithersburg, Maryland 20885

May 3, 2006

Mr. Leslie Bai
SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, CA 95131


Dear Mr. Bai:

I am pleased to inform you that your laboratory has been recognized by the Chinese Taipei's Bureau of Standards, Metrology, and Inspection (BSMI) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, Phase 1 Procedures, of the APEC Tel MRA. You may submit test data to BSMI to verify that the equipment to be imported into Chinese Taipei satisfies the applicable requirements. The designation of your organization will remain in force as long as its accreditation for the designated scope remains valid and comply with the designation requirements. The pertinent designation information is as follows:

- BSMI number: **SL2-IN-E-1130R** (Must be applied to the test reports)
- U.S. Identification No: **US0160**
- Scope of Designation: **CNS 13438**
- Authorized signatory: **Mr. Leslie Bai**

The names of all recognized CABs will be posted on the NIST website at <http://ts.nist.gov/mra>. If you have any questions, please contact Mr. Dhillon at 301-975-5521. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,




David F. Alderman
Group Leader, Standards Coordination and Conformity Group

cc: Jogindar Dhillon

NIST

SIEMIC ACREDITATION DETAILS: Taiwan NCC CAB ID: US0160

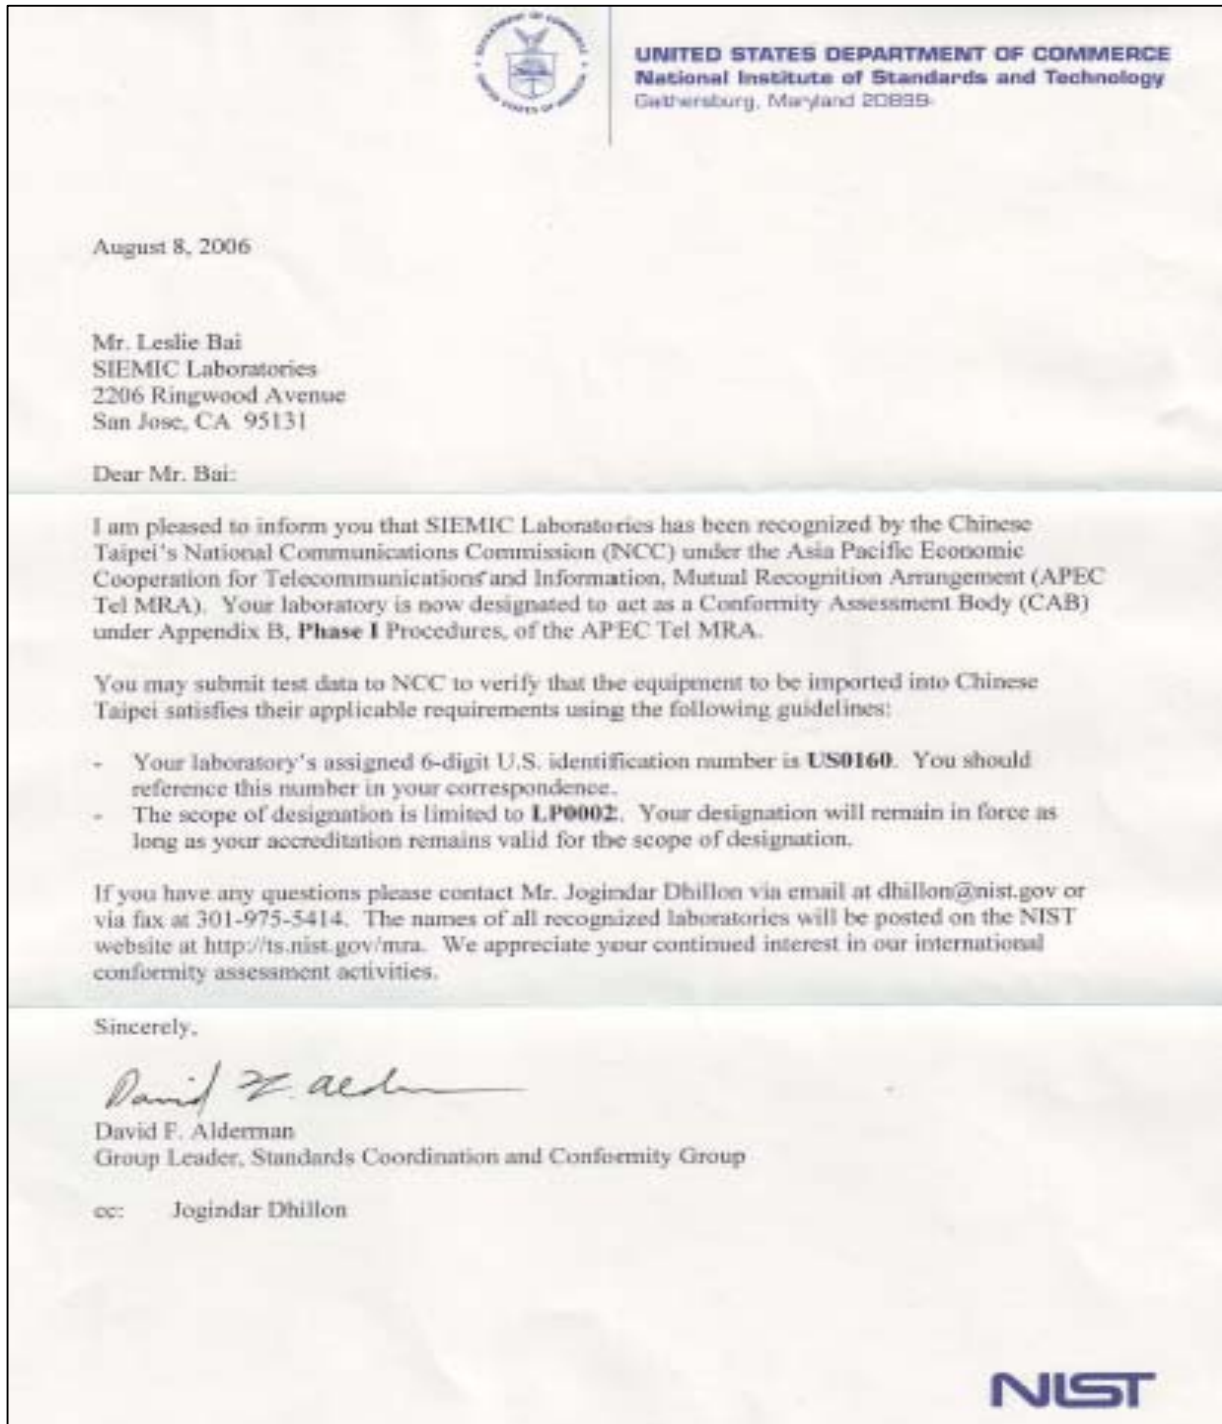



Title: RF Test Report of WattStopper
Model: DRD40
To: FCC 15.247 2008

Serial# SL08111401-WAT-001 (15.247)
Issue Date 22 December 2008
Page 11 of 62
www.siemic.com

SIEMIC ACREDITATION DETAILS: Mexico NOM Recognition

CAMARA NACIONAL
DE LA INDUSTRIA
ELECTRONICA, DE
TELECOMUNICACIONES
E INFORMATICA

Laboratorio Valentín V. Rivero

México D.F. a 16 de octubre de 2006.


**LESLIE BAI
DIRECTOR OF CERTIFICATION
SIEMIC LABORATORIES, INC.
ACCESSING GLOBAL MARKETS
P R E S E N T E**

En contestación a su escrito de fecha 5 de septiembre del año en curso, le comento que estamos muy interesados en su intención de firmar un Acuerdo de Reconocimiento Mutuo, para lo cual adjunto a este escrito encontrara el Acuerdo en idioma inglés y español prellenado de los cuales le pido sea revisado y en su caso corregido, para que si esta de acuerdo poder firmarlo para mandarlo con las autoridades Mexicanas para su visto bueno y así poder ejercer dicho acuerdo.

Aprovecho este escrito para mencionarle que nuestro intermediario gestor será la empresa Isabel de México, S. A. de C. V., empresa que ha colaborado durante mucho tiempo con nosotros en lo relacionado a la evaluación de la conformidad y que cuenta con amplia experiencia en la gestión de la certificación de cumplimiento con Normas Oficiales Mexicanas de producto en México.



Me despido de usted enviándole un cordial saludo y esperando sus comentarios al Acuerdo que nos ocupa.

Atentamente:


**Ing. Faustino Gómez González
Gerente Técnico del Laboratorio de
CANIETI.**

Calle 71
Hidráulica Condasa
06100 México, D.F.
Tel. 5264-0908 con 12 líneas
Fax 5264-0498
www.canieti.org

SIEMIC ACREDITATION DETAILS: Hong Kong OFTA Recognition No. D23/16V

 電訊管理局	Your Ref 來函編號 : D23/16 V Our Ref 本局編號 :	Telephone 電話 : (852) 2961 6320 Fax No 圖文傳真 : (852) 2838 5004 E-mail 電郵地址 : 20 July 2005
	<p>Mr. Leslie Bai Director of Certification, SIEMIC Laboratories 2206 Ringwood Avenue San Jose, California 95131 USA</p> <p>Dear Mr. Bai,</p> <p style="text-align: center;">Application of Recognised Testing Agency (RTA)</p> <p>Referring your submission of 28 June 2005 in relation to the application of RTA, I am pleased to inform you that OFTA has appointed SIEMIC Laboratories (SIEMIC) as a Recognised Testing Agency (RTA) :</p> <p>Please note that, under the Hong Kong Telecommunications Equipment Evaluation and Certification (HKTEC) Scheme, SIEMIC is authorized to conduct evaluation tests on telecommunications equipment against the following HKTA specifications :</p> <p><u>Scope of recognition (HKTA Specifications) :</u> 1001, 1002, 1004, 1006, 1007, 1008 1010, 1015, 1016 1022, 1026, 1027, 1029 1030, 1031, 1032, 1033, 1034, 1035, 1039 1041, 1042, 1043, 1045, 1047, 1048 2001</p> <p>You are requested to refer to and comply with the code of practice and guidelines for RTA as given in the Information Note OFTA I 411 "Recognised Testing Agency (RTA) for Conducting Evaluation Test of Telecommunications Equipment", which can be downloaded from OFTA's homepage at http://www.ofta.gov.hk/tec/information-notes.html.</p> <p>If you have any queries, please do not hesitate to contact me.</p> <p style="text-align: right;">Yours sincerely,</p> <p style="text-align: right;"> (K K Sin) for Director-General of Telecommunications</p> <p>Office of the Telecommunications Authority 29/F Wu Chung House 213 Queen's Road East Wan Chai Hong Kong 電訊管理局 香港灣仔皇后大道東 213 號胡忠大廈 29 字樓</p> <p style="text-align: right;">http://www.ofta.gov.hk</p>	

CONTENTS

1	EXECUTIVE SUMMARY & EUT INFORMATION	16
2	TECHNICAL DETAILS.....	17
3	MODIFICATION.....	18
4	TEST SUMMARY.....	19
5	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	20
	ANNEX A. TEST INSTRUMENT & METHOD	54
	ANNEX B EUT AND TEST SETUP PHOTOGRAPHS.....	58
	ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	58
	ANNEX D USER MANUAL, BLOCK & CIRCUIT DIAGRAM	62

This page has been left blank intentionally.

1 Executive Summary & EUT information

The purpose of this test programme was to demonstrate compliance of the WATTSTOPPER INC Wireless Universal Dimmer, against the current Stipulated Standards. The *Wireless Universal Dimmer* have demonstrated compliance with the FCC 15.247 2008.

EUT Information

EUT Description : The Wireless Universal Dimmer is mounted inside a wall box and framed by an architectural screw less DRD40 wall plate. The Wireless Universal Dimmer use radio signals to communicate with each other to control lighting and other types of electric loads in selected areas. Wireless Universal Dimmer devices use the 900MHz band for high-speed control communication. Using the Watt Stopper's own "frequency-agile" Top Dog™ technology, Wireless Universal Dimmer avoids interference with other 900MHz devices, such as cordless phones and baby monitors.

The equipment under test is a hybrid system operating in the 904.861 - 924.873 MHz band.

Model No : DRD40

Serial No : N/A

Input Power : 120VAC, 60Hz

Classification Per Stipulated Test Standard : Hybrid System / Device

2 TECHNICAL DETAILS

Purpose	Compliance testing of Wireless Universal Dimmer with stipulated standard
Applicant / Client	WATTSTOPPER INC
Manufacturer	WattStopper 2800 De La Cruz Blvd. Santa Clara, CA 95050 USA
Laboratory performing the tests	SIEMIC Laboratories
Test report reference number	SL08111401-WAT-001 (15.247)
Date EUT received	28 November 2008
Standard applied	47 CFR §15.247: 2008
Dates of test (from – to)	November 28 to December 8, 2008
No of Units:	4
Equipment Category:	DTS
Trade Name:	WattStopper
Model :	DRD40
RF Operating Frequency (ies)	904.861 MHz to 924.873 MHz
Number of Channels :	5
Modulation :	Hybrid system using spread spectrum and digital modulation (FSK)
FCC ID :	Q4BDRD40
IC ID :	N/A

3 MODIFICATION

NONE

4 TEST SUMMARY

The product was tested in accordance with the following specifications. All testing has been performed according to below product classification:

Hybrid System / Device

Test Results Summary

Test Standard		Description	Pass / Fail
47 CFR Part 15.247: 2008	RSS 210 Issue 7: 2007		
15.203		Antenna Requirement	Pass
15.205		Restricted Band of Operation	Pass
15.207(a)		AC Line Conducted Emissions Voltage	Pass
15.247(a) (1)		Channel Separation	Pass
15.247(a)(1)		Occupied Bandwidth	Pass
15.247(a) (2)		6dB Occupied Bandwidth	N/A
15.247(a) (1) (i)		Number of Hopping Channels	N/A
15.247(a) (1) (i)		Time of Occupancy	Pass
15.247(b) (2)		Output Power	Pass
15.247(c)		Antenna Gain > 6 dBi	Pass
15.247(d)		Antenna Port Conducted Spurious Emissions	Pass
15.209; 15.247(d)		Radiated Spurious Emissions	Pass
15.247(e)		Power Spectral Density	Pass
15.247(f)		Hybrid System Requirement	Pass
15.247(i) §2.1091& §2.1093		Maximum Permissible Exposure	Pass
15.247 (d)		100 kHz Bandwidth of Frequency Band Edge	Pass
		Receiver Spurious Emissions	Pass
ANSI C63.4: 2003/ RSS-Gen Issue 2: 2007			
PS: All measurement uncertainties are not taken into consideration for all presented test result.			

5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

5.1 Antenna Requirement

Requirement(s): 47 CFR §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna requirement must meet at least one of the following:

- a) Antenna must be permanently attached to the device.
 - b) Antenna must use a unique type of connector to attach to the device.
 - c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.
- 1) The antenna was permanently soldered to the board with a gain of 2.27dBi which meets the requirement.

5.2 Conducted Emissions Voltage

Requirement:

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.


Procedures:

- All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
- A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
- Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 150kHz – 30MHz (Average & Quasi-peak) is $\pm 3.5\text{dB}$.
- Environmental Conditions

Temperature	23°C - 25°C
Relative Humidity	48%
Atmospheric Pressure	1019mbar

Test Date : November 28 and December 08, 2008
Tested By : Dan Corona

Results: Pass

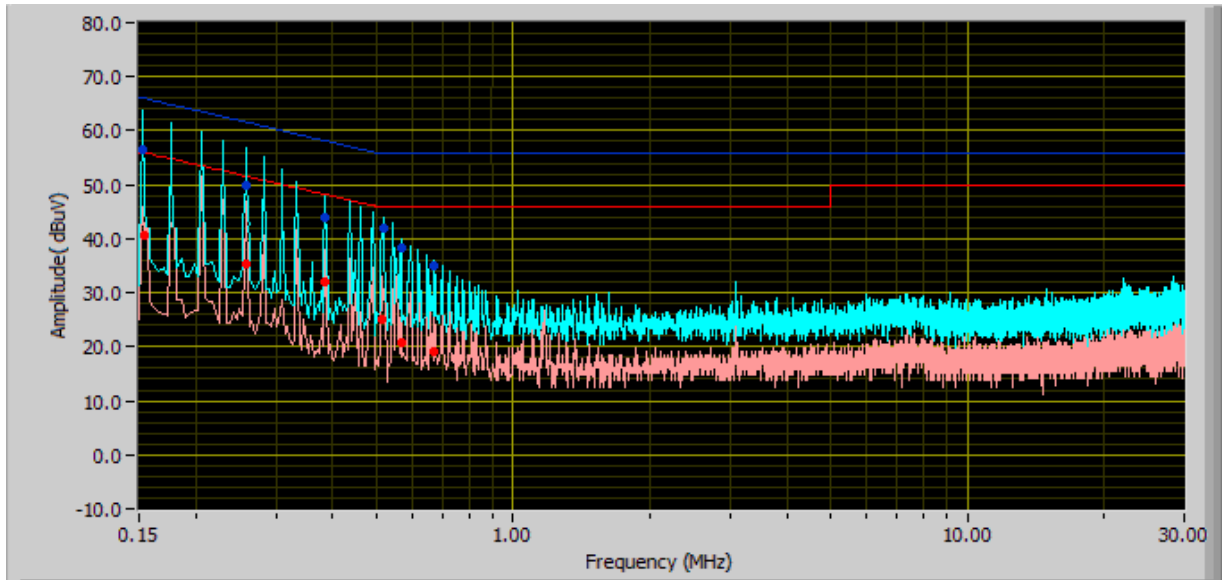


Quasi-Peak Limit

Average Limit

Phase Line Plot at 120Vac, 60Hz

Frequency (MHz)	OP Value (dBμV)	Class B Limit (dB)	Pass / Fail	Margin (dB)	Avg Value (dBμV)	Class B Limit (dB)	Pass / Fail	Margin (dB)	Line
0.15	56.76	66.00	PASS	-9.24	41.01	56.00	PASS	-14.99	Phase
0.26	50.11	61.00	PASS	-10.89	35.82	51.00	PASS	-15.18	Phase
0.51	42.20	56.00	PASS	-13.80	25.15	46.00	PASS	-20.85	Phase
0.57	38.55	56.00	PASS	-17.45	21.71	46.00	PASS	-24.29	Phase
0.39	44.75	58.00	PASS	-13.25	32.04	48.00	PASS	-15.96	Phase
0.67	35.76	56.00	PASS	-20.24	19.01	46.00	PASS	-26.99	Phase

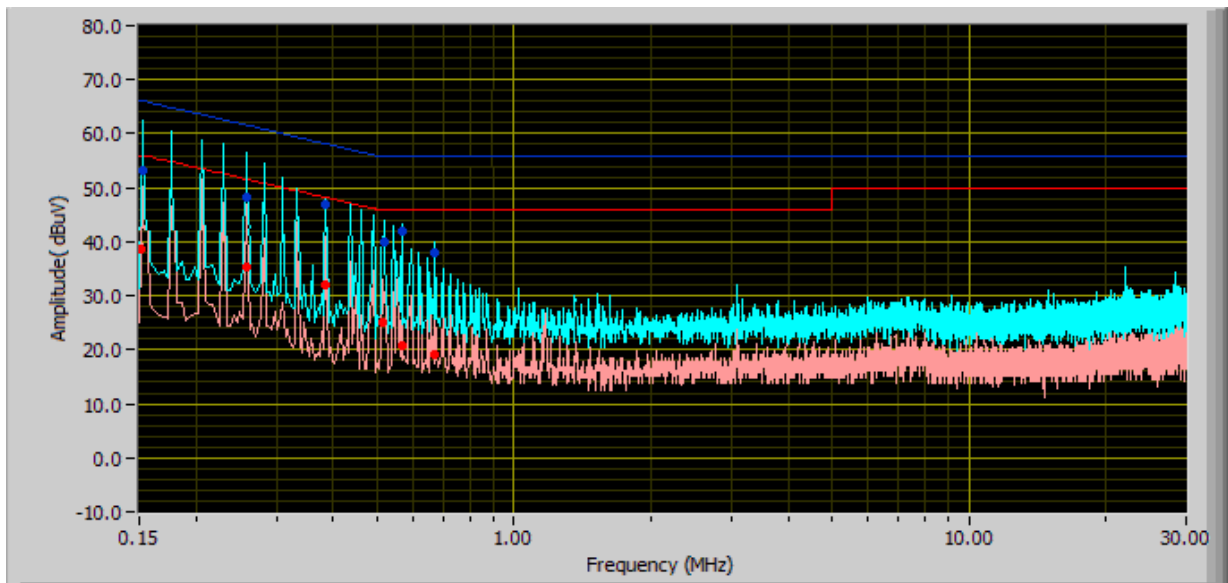

Quasi-Peak Limit

Average Limit

Neutral Line Plot at 120Vac, 60Hz

Frequency (MHz)	QP Value (dBμV)	Class B Limit (dB)	Pass / Fail	Margin (dB)	Avg Value (dBμV)	Class B Limit (dB)	Pass / Fail	Margin (dB)	Line
0.16	53.76	66.00	PASS	-12.24	39.68	56.00	PASS	-16.32	Neutral
0.27	48.11	61.00	PASS	-12.89	35.80	51.00	PASS	-15.2	Neutral
0.55	40.2	56.00	PASS	-15.8	25.35	46.00	PASS	-20.65	Neutral
0.59	42.55	56.00	PASS	-13.45	21.75	46.00	PASS	-24.25	Neutral
0.38	47.75	58.00	PASS	-10.25	32.44	48.00	PASS	-15.56	Neutral
0.68	38.76	56.00	PASS	-17.24	19.51	46.00	PASS	-26.49	Neutral

5.3 Channel Separation

1. Conducted Measurement
EUT was set for low , mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Environmental Conditions

Temperature	23°C - 25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
3. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 20GHz is $\pm 1.5\text{dB}$.
4. Test Date : November 28 and December 08, 2008
Tested By : Dan Corona

Requirement(s): 47 CFR §15.247(a)(1)(i)

Procedures: The Channel Separation was measured conducted using a spectrum analyzer at low, mid, and hi channels.

Frequency hopping systems in the 902-928 MHz shall have, hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies.


Test Result: Pass

Channel	Channel Frequency (MHz)	Channel Separation (MHz)	20 dB Channel Bandwidth (KHz)
Low	904.861	6.00	149.20
Mid	918.845	3.67	142.50
High	924.873	2.39	137.50


A

SIEMIC, INC.
Accessing global marketsTitle: RF Test Report of WattStopper
Model: DRD40
To: FCC 15.247 2008Serial# SL08111401-WAT-001 (15.247)
Issue Date 22 December 2008
Page 25 of 62
www.siemic.com


Channel Separation - Low Channel

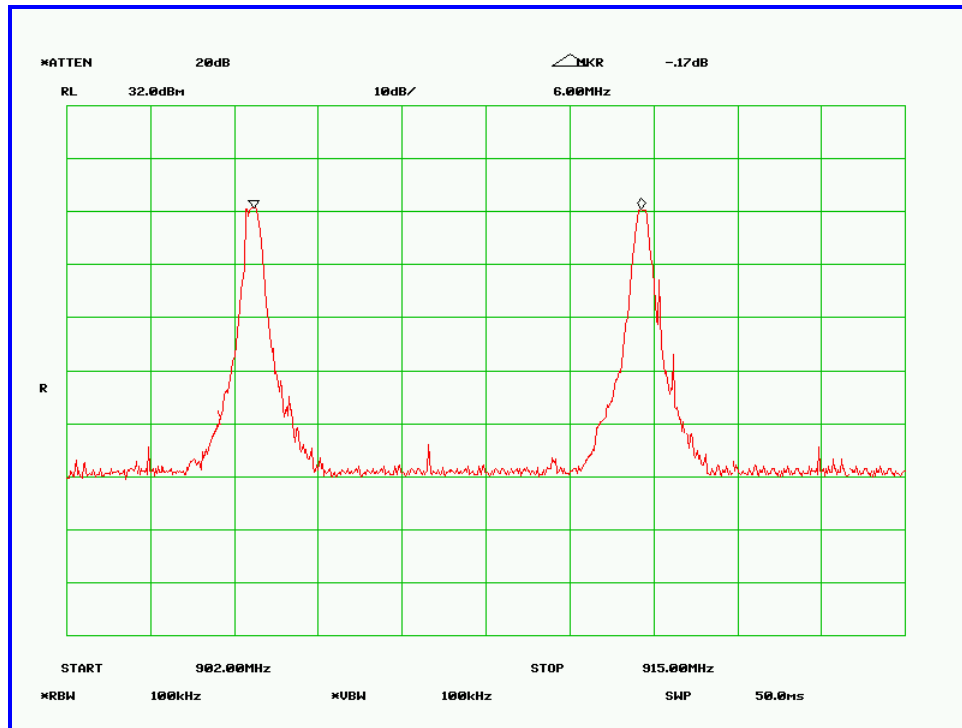

Channel Separation - Mid Channel

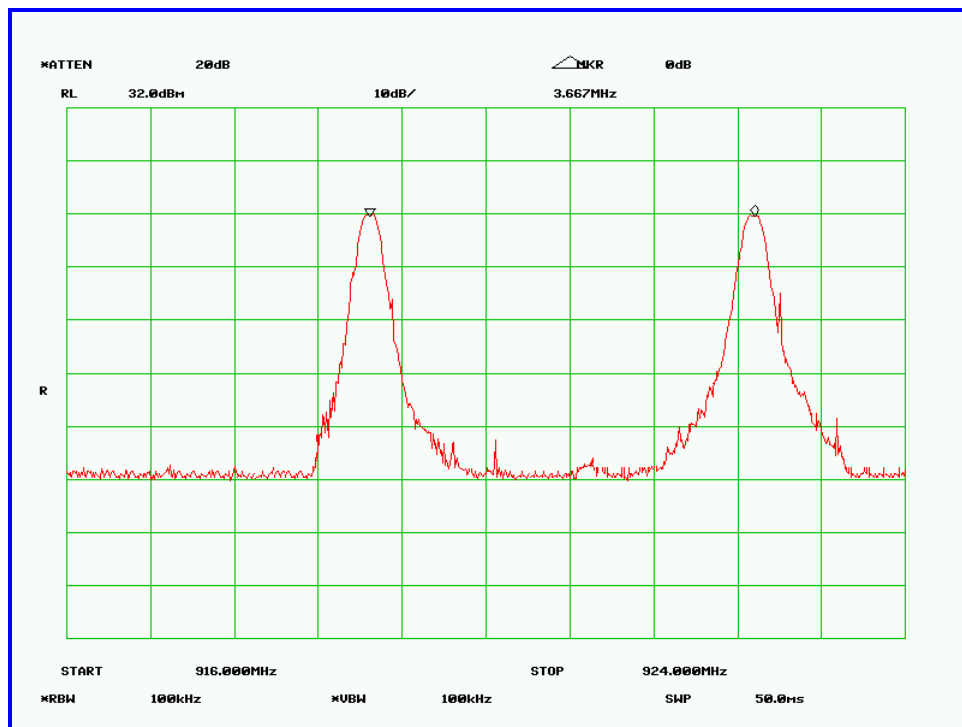

Channel Separation – High Channel

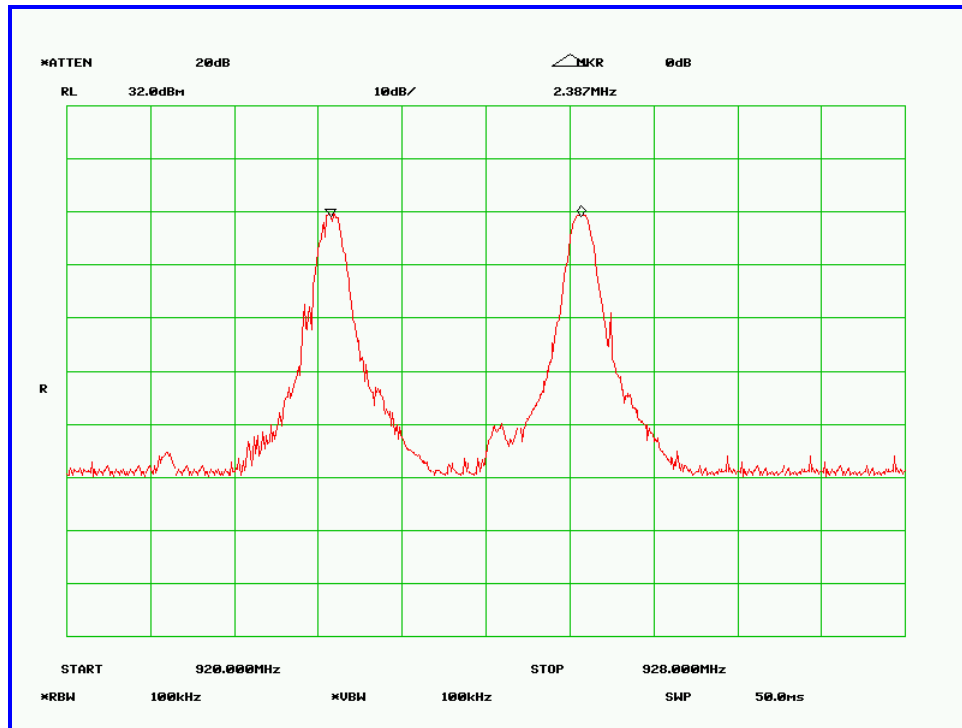

5.4 20dB Occupied Bandwidth

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Environmental Conditions

Temperature	23°C - 25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
3. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 20GHz is ± 1.5 dB.
4. Test Date : November 28 and December 08, 2008
Tested By : Dan Corona

Requirement(s): 47 CFR §15.247(a)(1)(i)

Procedures: The 20dB bandwidths were measured conducted using a spectrum analyzer at low, mid, and hi channels.



Test Result: Pass

Note: The maximum allowed 20 dB bandwidth of the hopping is 500 kHz.


Channel	Channel Frequency (MHz)	20 dB Channel Bandwidth (KHz)	99% Channel Bandwidth (KHz)
Low	904.861	149.20	N/A
Mid	918.845	142.50	N/A
High	924.873	137.50	N/A

Refer to the attached plots.

A

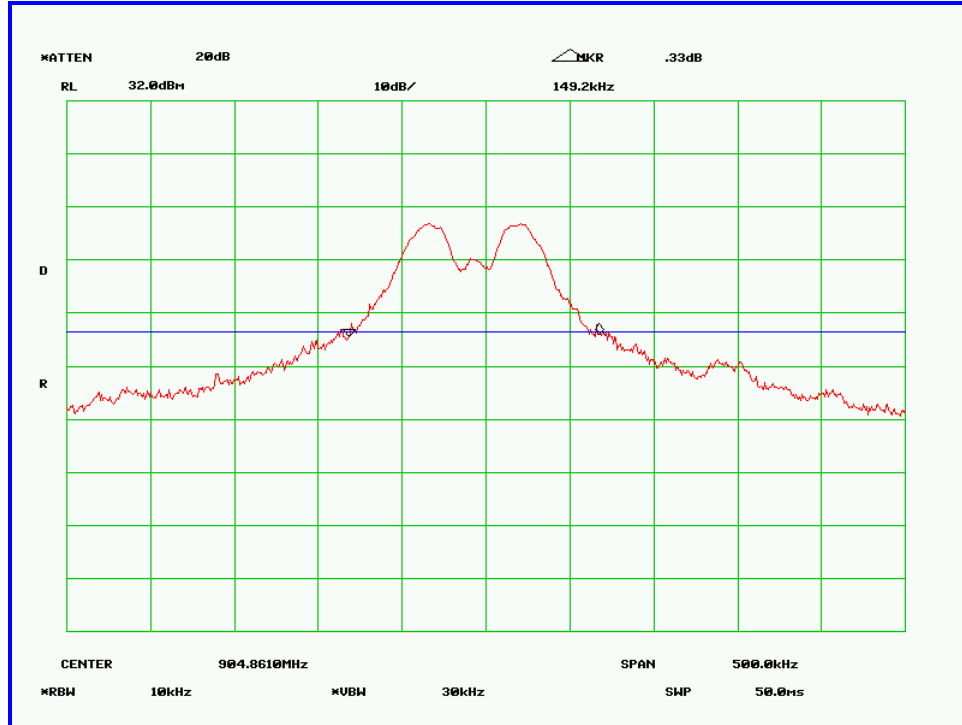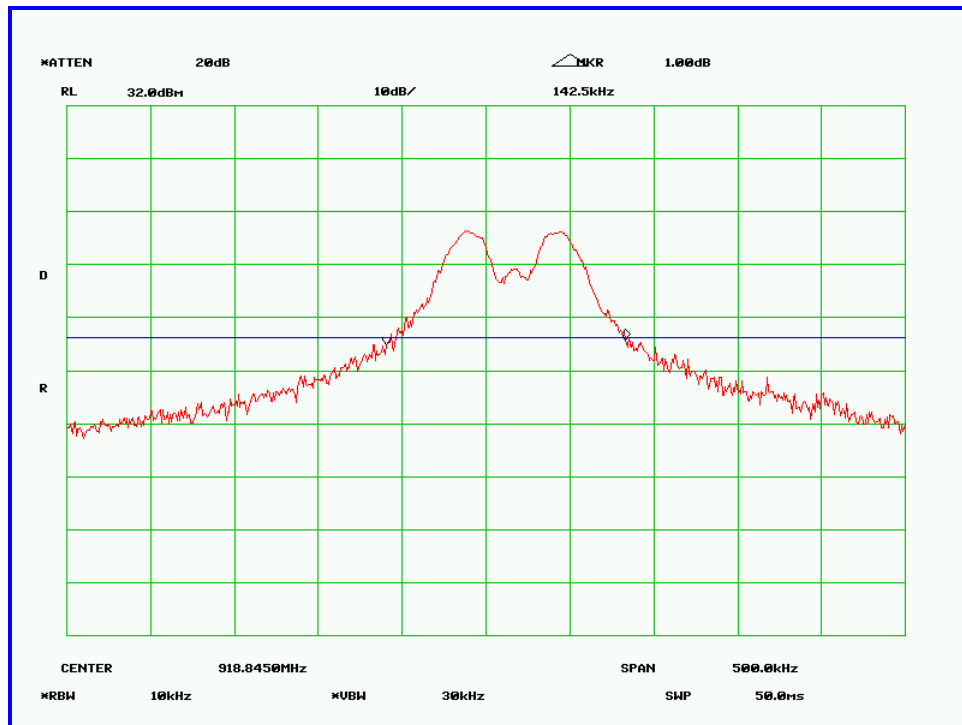SIEMIC, Inc.
Accessing global marketsTitle: RF Test Report of WattStopper
Model: DRD40
To: FCC 15.247 2008Serial# SL08111401-WAT-001 (15.247)
Issue Date 22 December 2008
Page 28 of 62
www.siemic.com**20dB Bandwidth - Low Channel****20dB Bandwidth - Mid Channel**

A

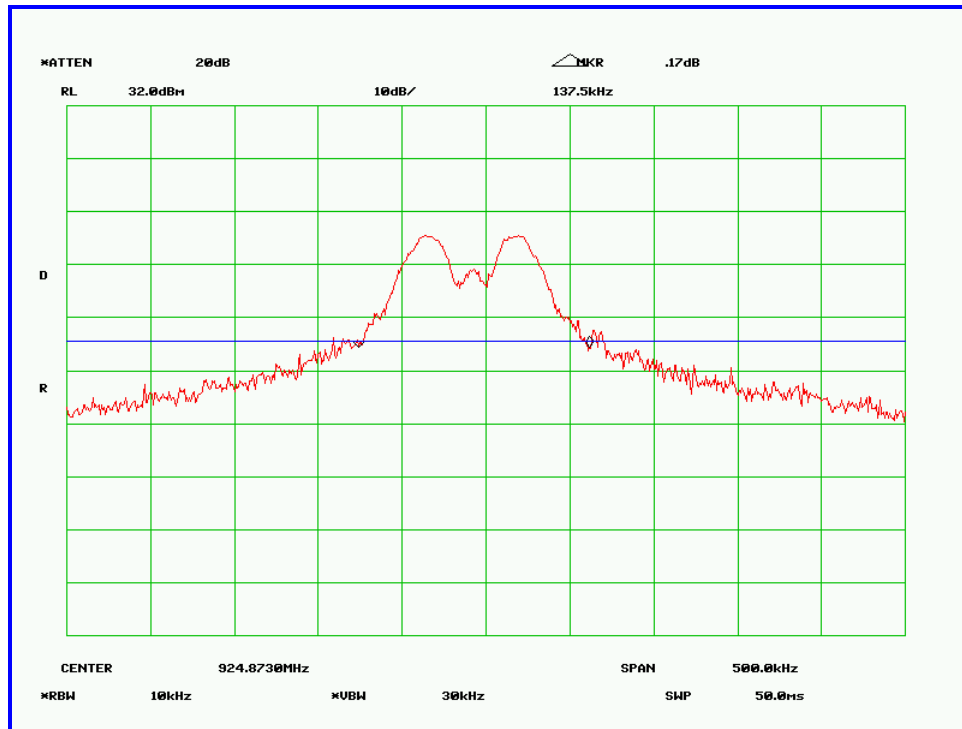SIEMIC, Inc.
Accessing global marketsTitle: RF Test Report of WattStopper
Model: DRD40
To: FCC 15.247 2008Serial# SL08111401-WAT-001 (15.247)
Issue Date 22 December 2008
Page 29 of 62
www.siemic.com**20dB Bandwidth - High Channel**

5.5 Time of Occupancy

1. Conducted Measurement
EUT was set for low , mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 20GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

Temperature	23°C - 25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test Date : November 28 and December 08, 2008
Tested By : Dan Corona

Standard Requirement: 47 CFR §15.247(a)(1)

For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

Procedures: The Time of Occupancy measurement was taken conducted using a spectrum analyzer.



Test Result: Pass

Channel	Channel Frequency (MHz)	Dwell Time (sec)	Limit (sec)
Low	904.861	0.260	0.4
Mid	918.845	0.244	0.4
High	924.873	0.260	0.4



A

SIEMIC, Inc.
Accessing global marketsTitle: RF Test Report of WattStopper
Model: DRD40
To: FCC 15.247 2008Serial# SL08111401-WAT-001 (15.247)
Issue Date 22 December 2008
Page 31 of 62
www.siemic.com

Low Channel

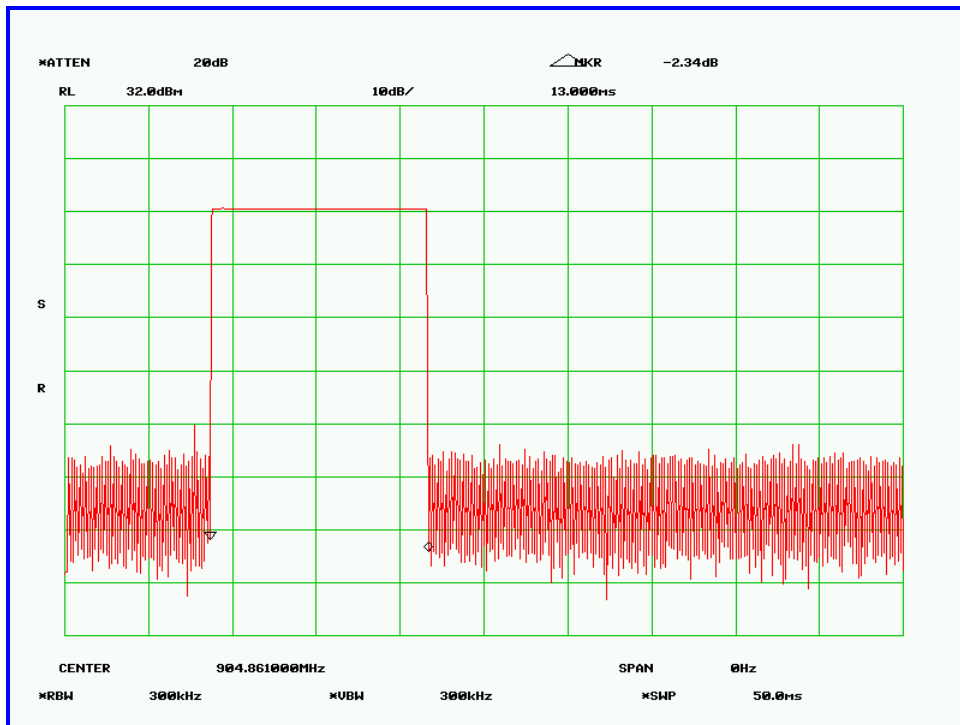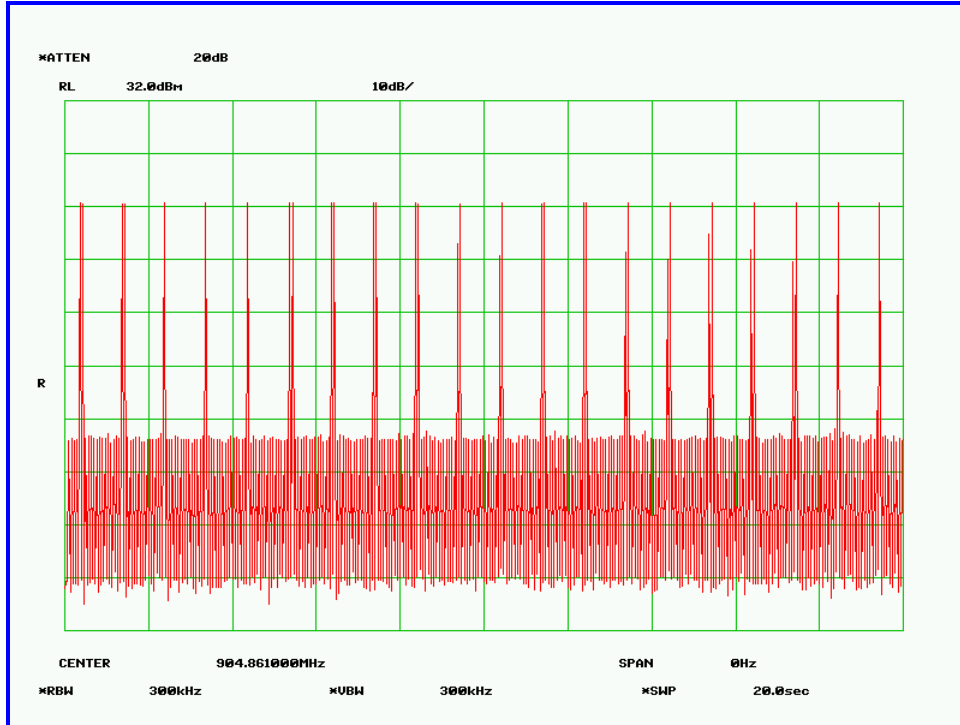



Mid Channel

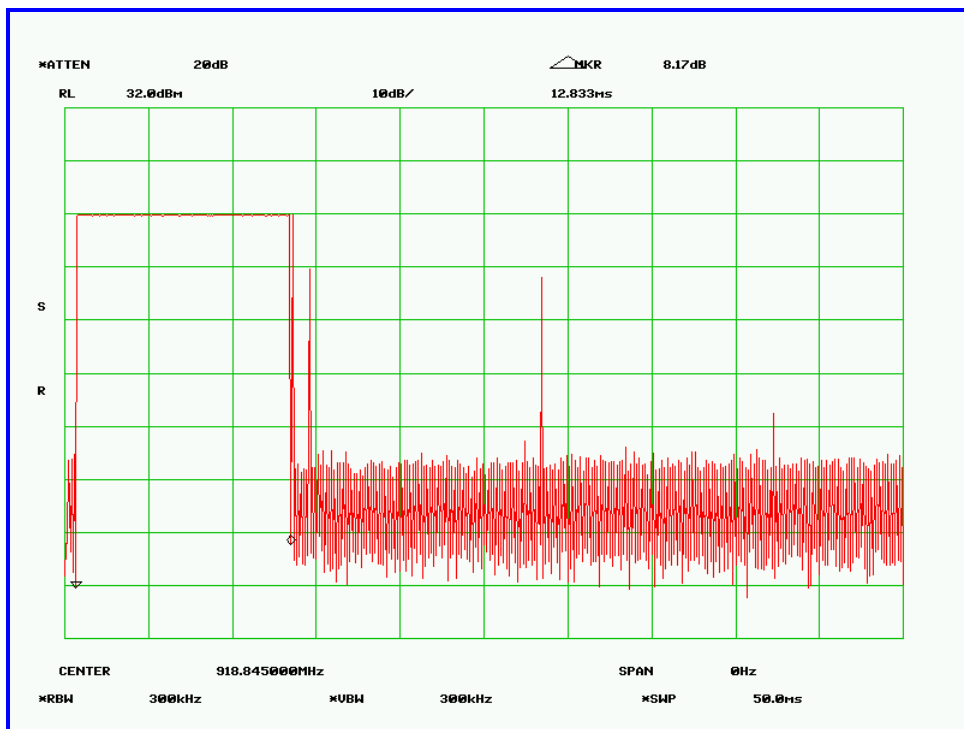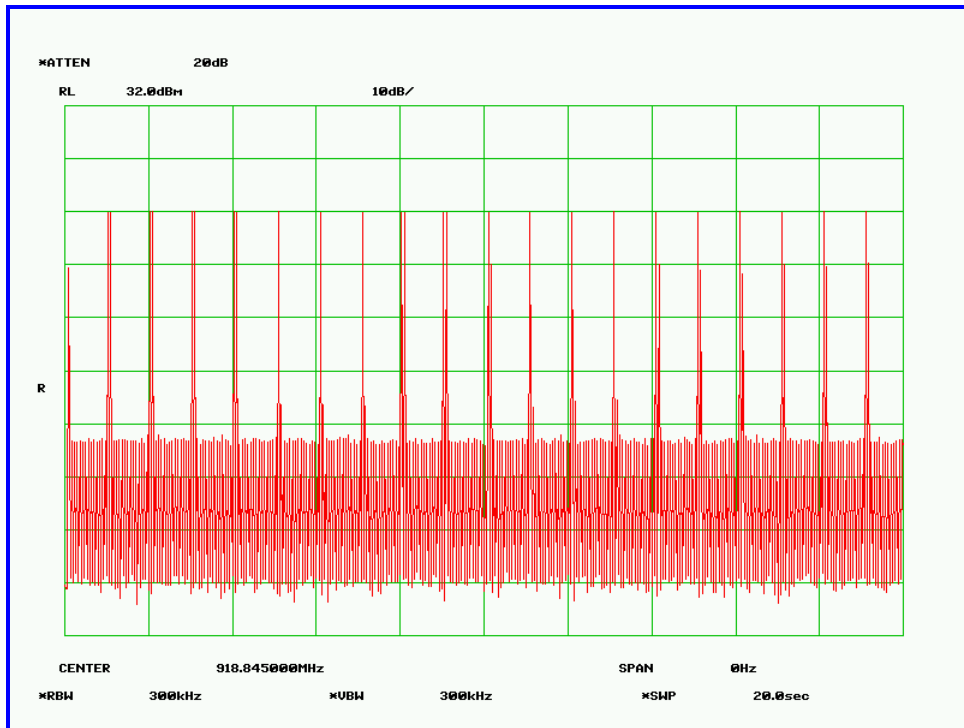

A

SIEMIC, INC.
Accessing global marketsTitle: RF Test Report of WattStopper
Model: DRD40
To: FCC 15.247 2008Serial# SL08111401-WAT-001 (15.247)
Issue Date 22 December 2008
Page 33 of 62
www.siemic.com

High Channel

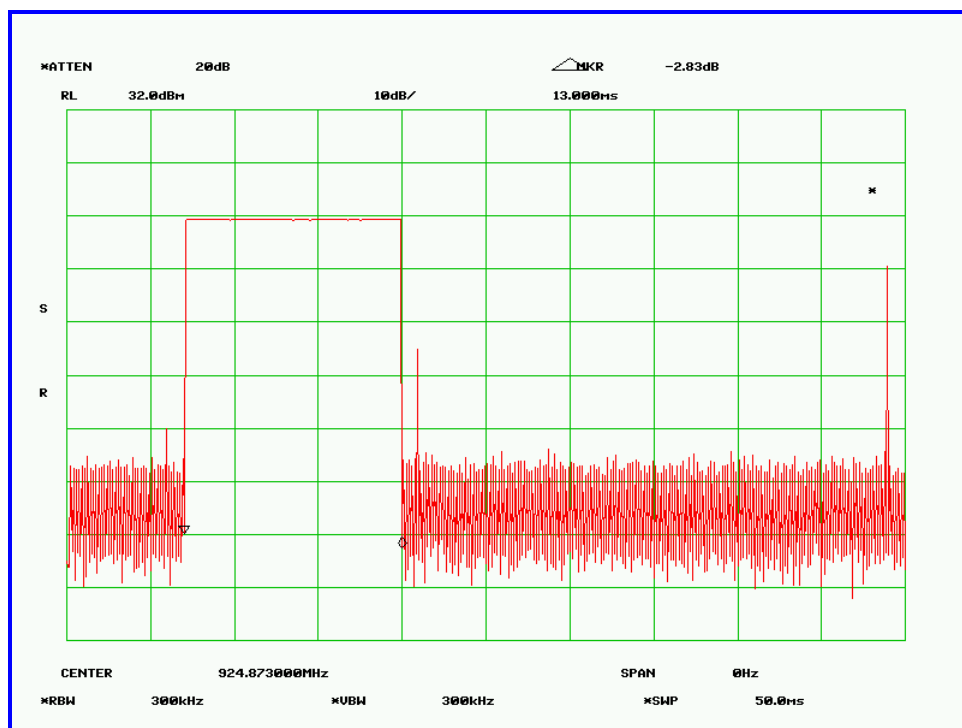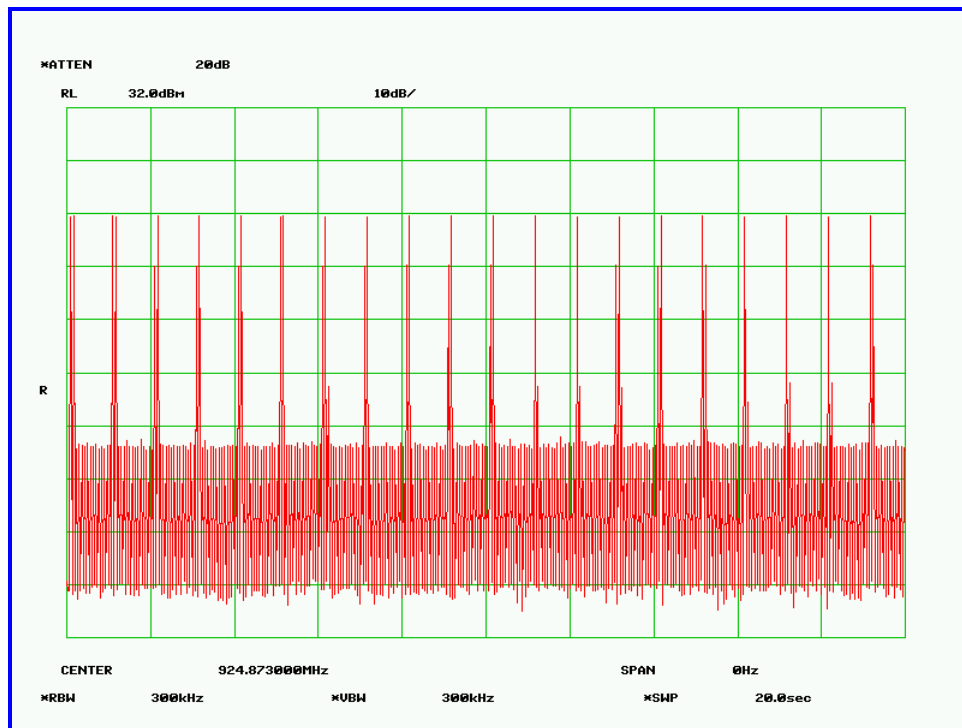

5.6 Peak Output Power

1. Conducted Measurement
EUT was set for low , mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

Temperature	23°C - 25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test Date : November 28 and December 08, 2008
Tested By : Dan Corona

Standard Requirement : 47 CFR §15.247(b)


Procedures: The peak output power was measured conducted using a spectrum analyzer at low, mid, and hi channels. Peak detector was set to measure the power output. The power is converted from watt to dBm, therefore, 1 watt = 30 dBm. The highest antenna gain that will be used is -20dBi.

Note: For frequency hopping systems operating in the 902–928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.


Test Result: Pass

Channel	Channel Frequency (MHz)	Measured Output Power (dBm)	Peak Output Power Limit (dBm)
Low	904.861	1.67	30
Mid	918.845	2.37	30
High	924.873	1.80	30


Output Power Low Channel

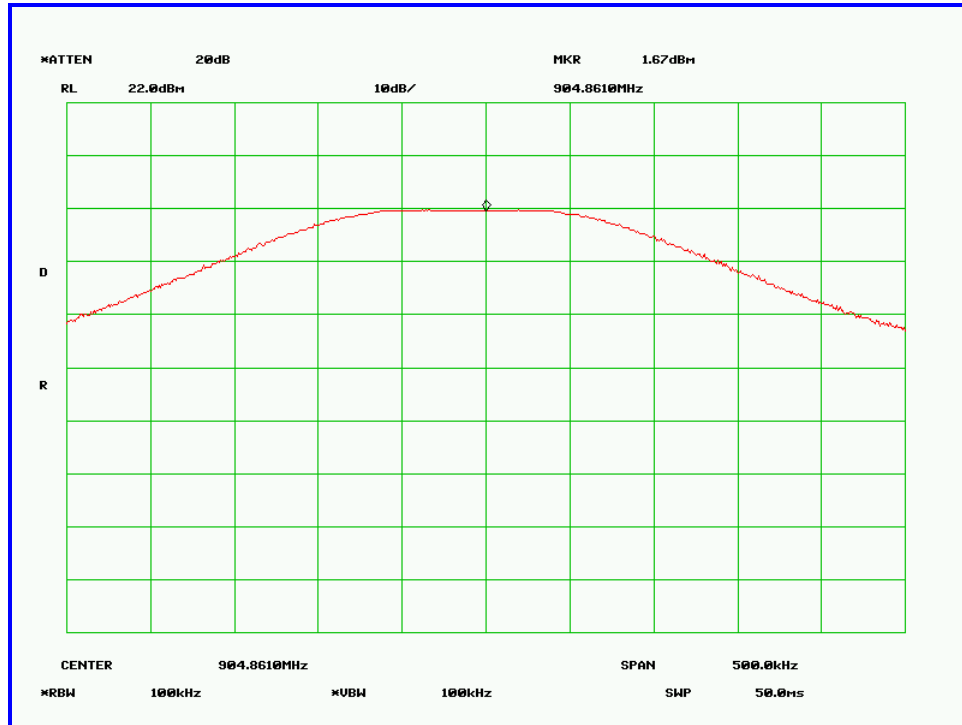

Output Power Mid Channel

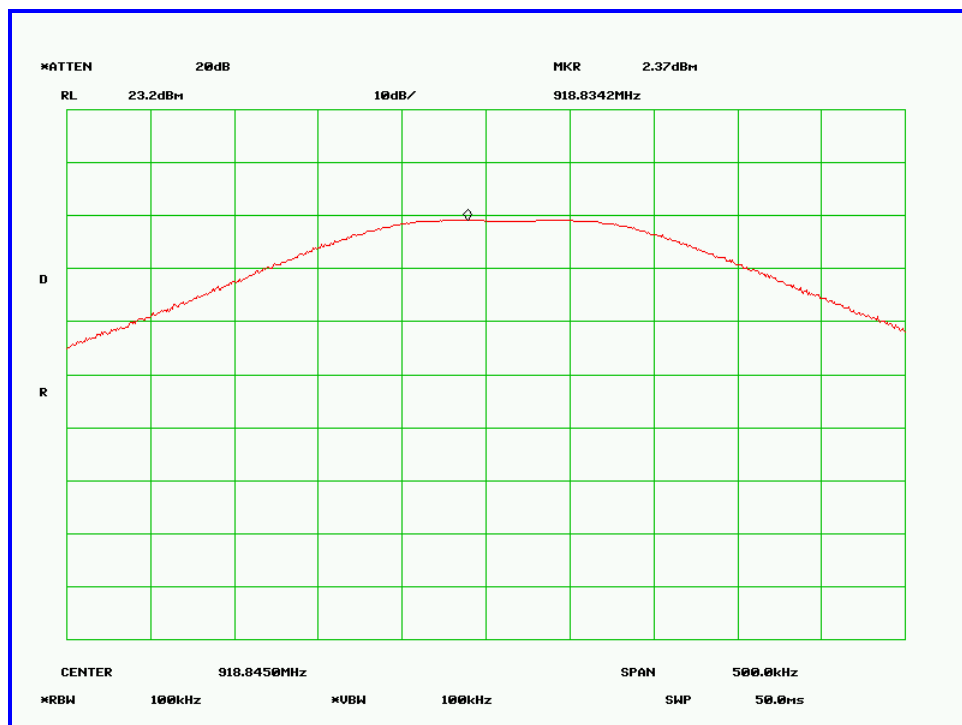

Output Power High Channel

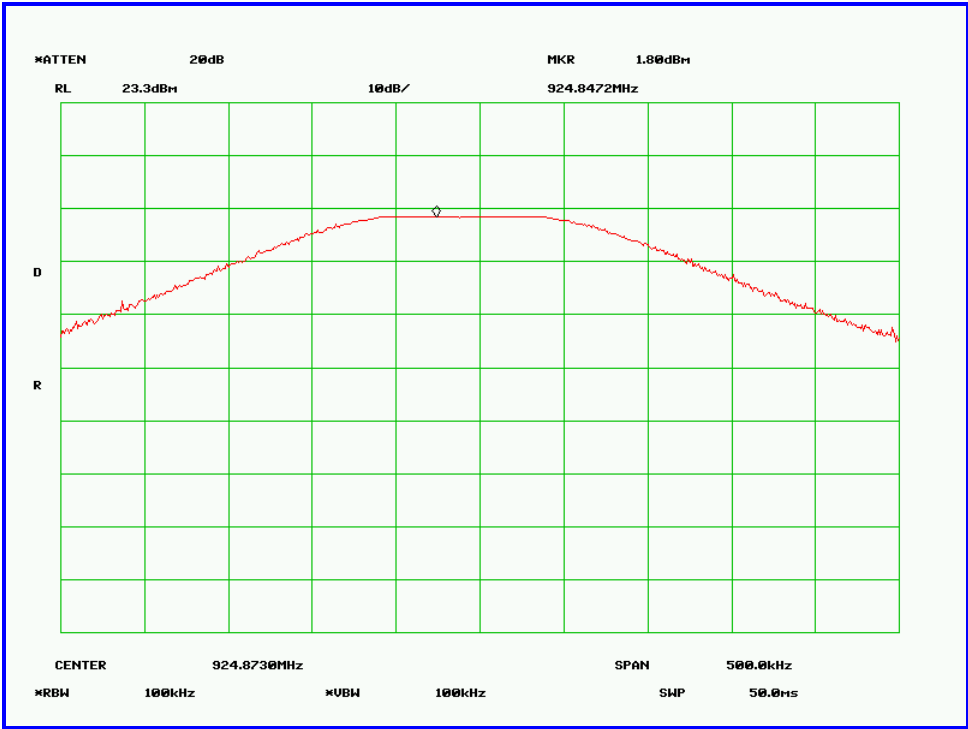

5.7 Peak Power Spectral Density

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal. RBW = VBW = 3 KHz
 2. Environmental Conditions

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
- Test Date : November 28 and December 08, 2008
Tested By : Dan Corona


Standard Requirement:

Per FCC rule §15.247(e), the power spectral density shall not be greater than 8 dBm in any 3 KHz band.


Test Result: Pass

Channel	Channel Frequency (MHz)	PPSD (dBm/3 kHz)	Limit (dBm/3 kHz)
Low	904.861	-4.50	8
Mid	918.845	-3.80	8
Hi	924.873	-4.03	8

Low Channel

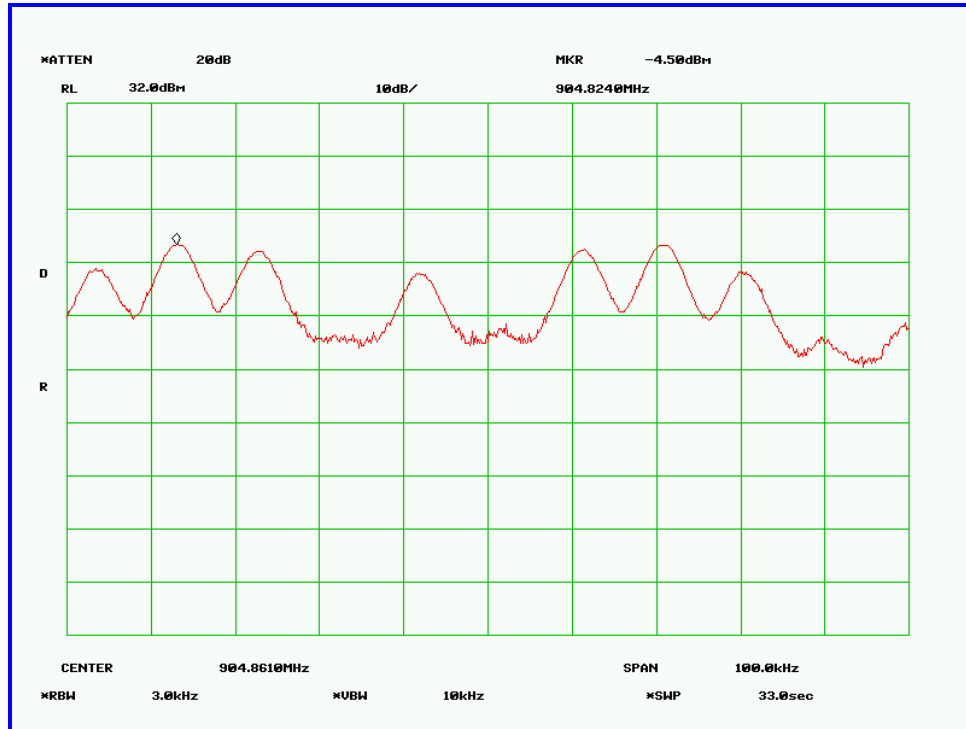


Middle Channel

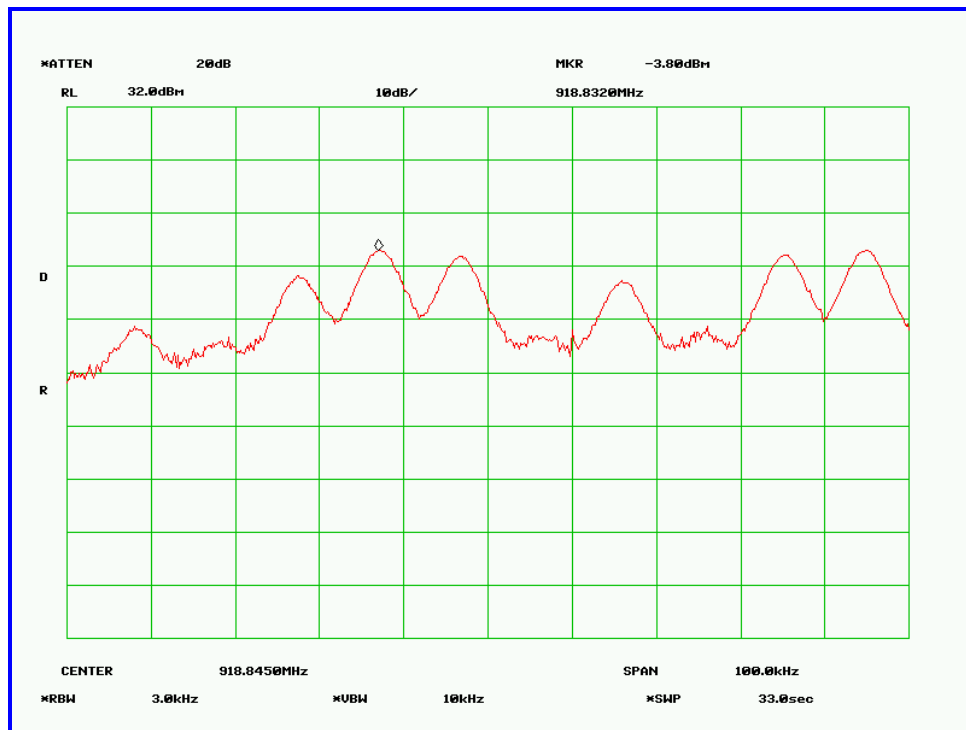

A

High Channel

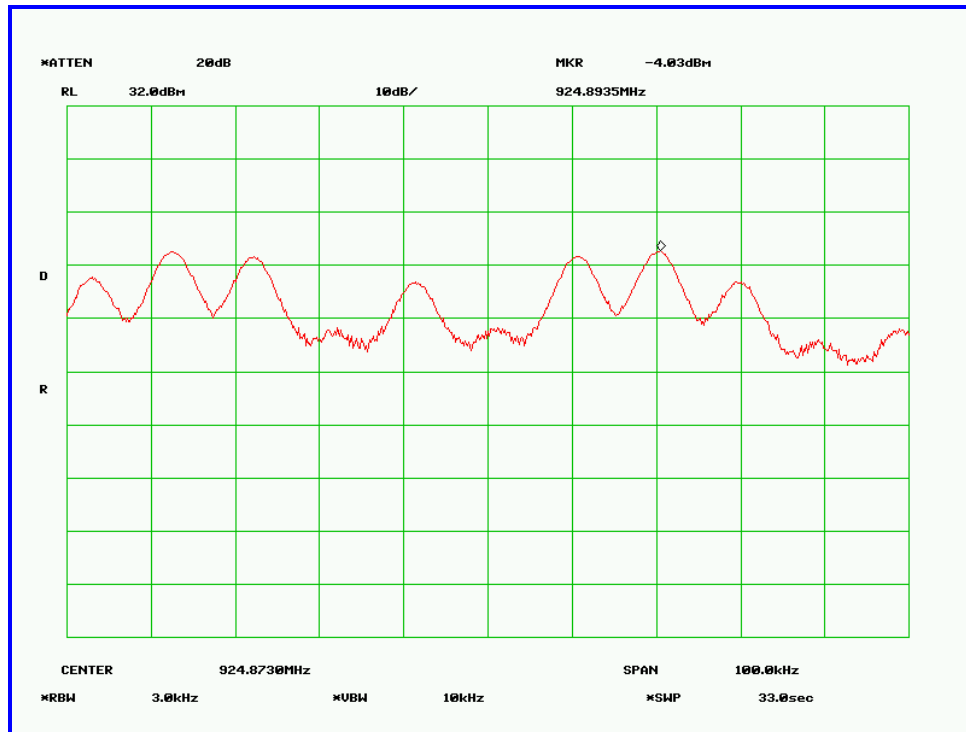

5.8 100 kHz Bandwidth of Frequency Band Edge

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 20GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

Temperature	23°C - 25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test Date : November 28 and December 08, 2008
Tested By : Dan Corona

Standard Requirement : 47 CFR §15.247(b)


Procedures: in any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required.

Test Result: Pass


A

SIEMIC, Inc.
Accessing global marketsTitle: RF Test Report of WattStopper
Model: DRD40
To: FCC 15.247 2008Serial# SL08111401-WAT-001 (15.247)
Issue Date 22 December 2008
Page 41 of 62
www.siemic.com

Low Channel

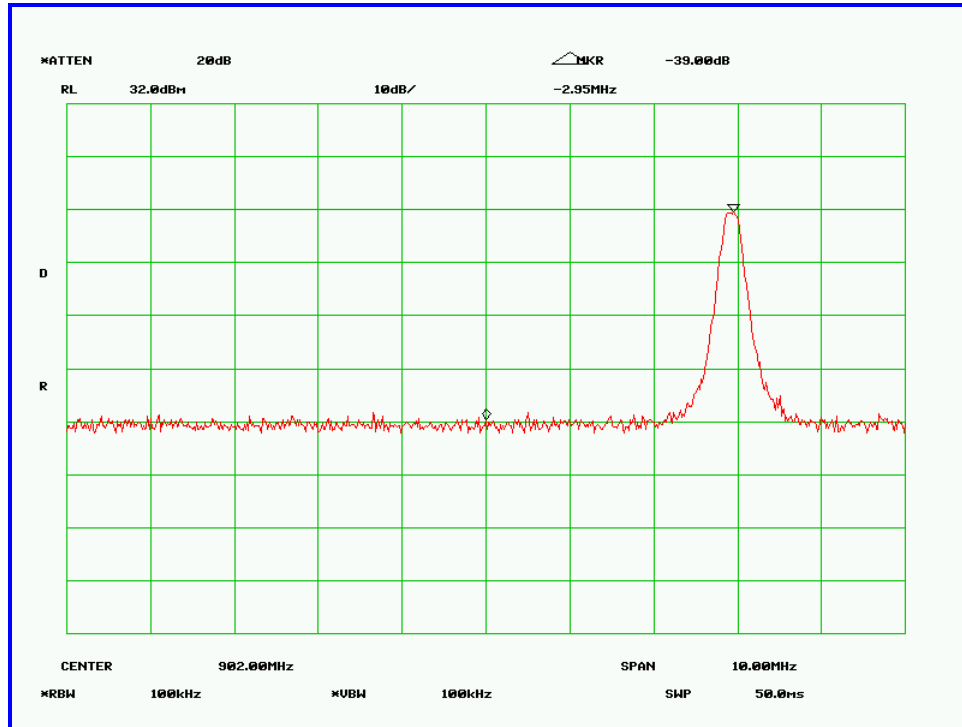

High Channel

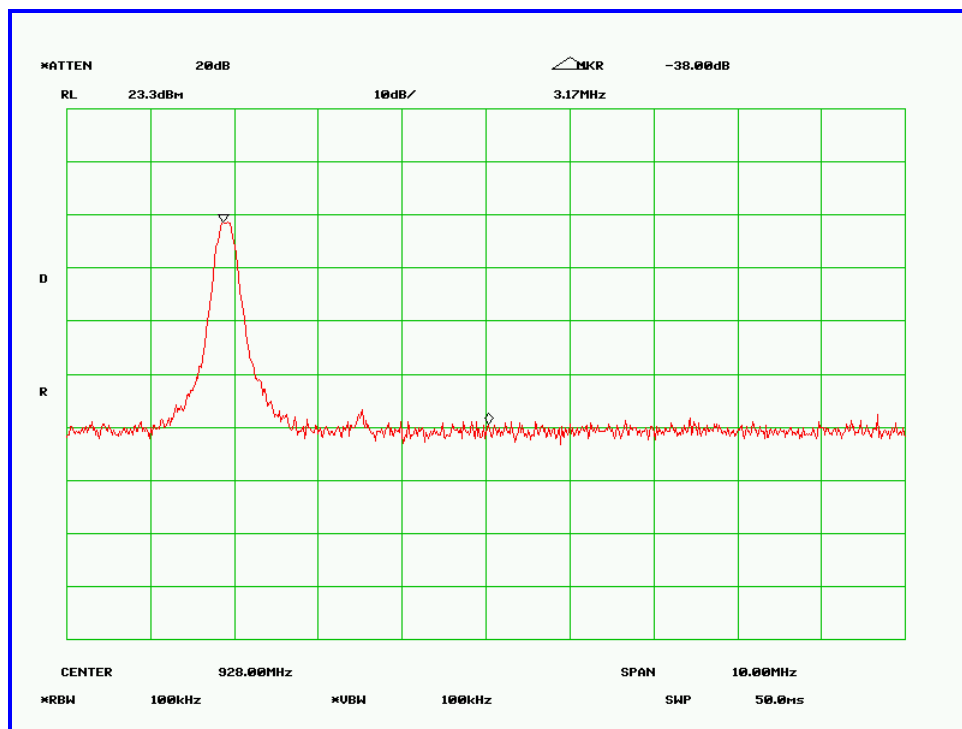

5.9 Antenna Port Emission

1. Conducted Measurement
EUT was set for low , mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 20GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

Temperature	23°C - 25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test Date : November 28 and December 08, 2008
Tested By : Dan Corona

Standard Requirement : 47 CFR §15.247(c)



Procedures: The conducted spurious emissions were measured conducted using a spectrum analyzer at low, mid, and hi channels. The limit was determined by attenuating 20 dB of the RF peak power output

Test Result: Pass


A

SIEMIC, Inc.
Accessing global marketsTitle: RF Test Report of WattStopper
Model: DRD40
To: FCC 15.247 2008Serial# SL08111401-WAT-001 (15.247)
Issue Date 22 December 2008
Page 43 of 62
www.siemic.com



Low Channel

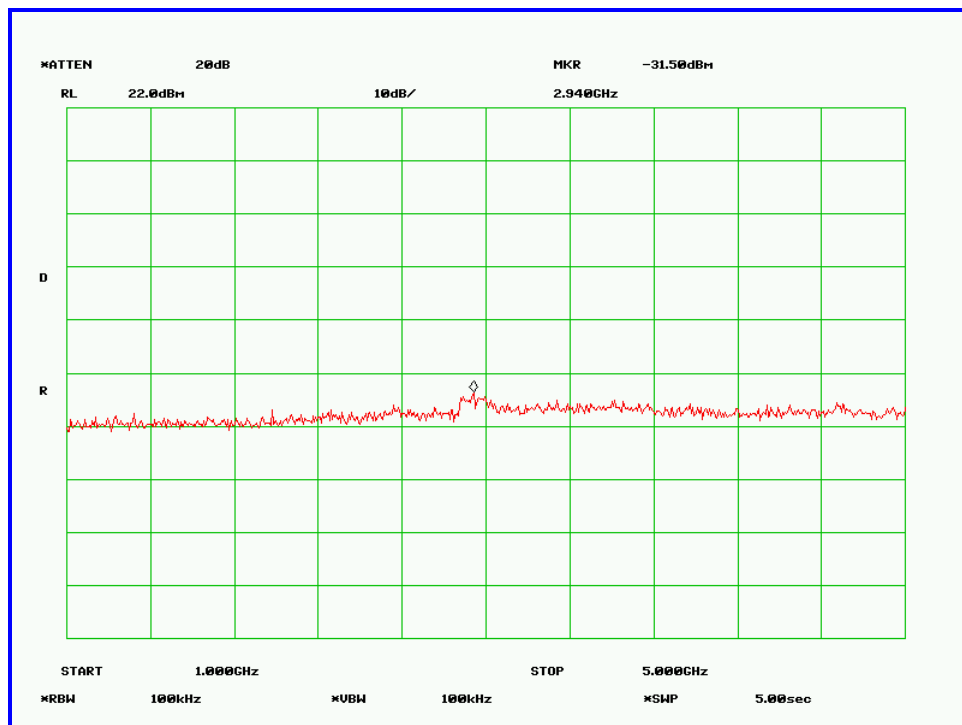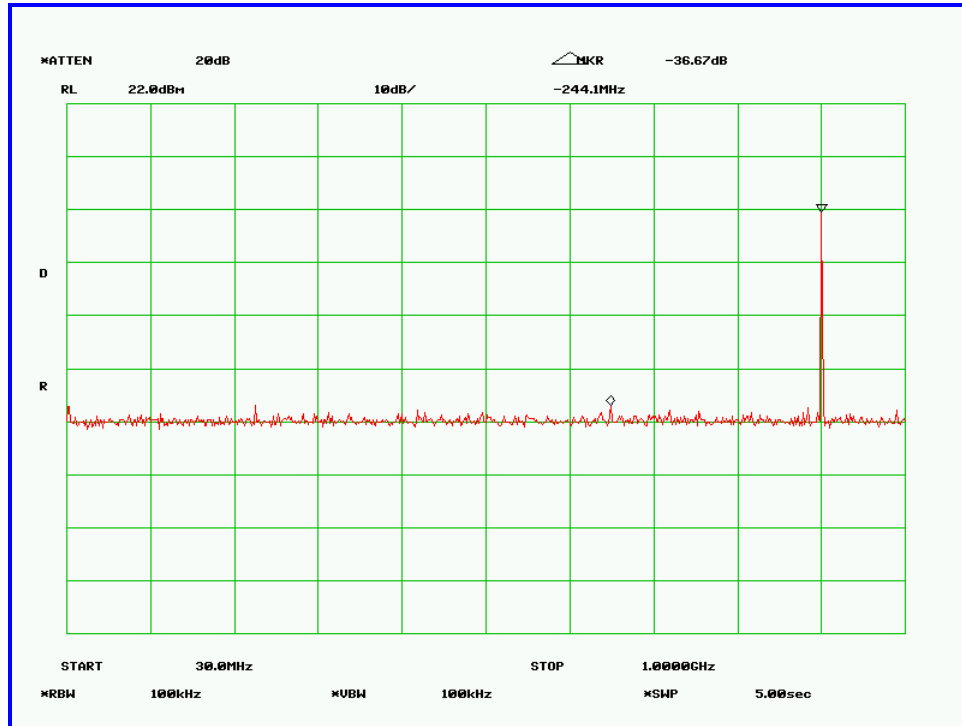


A

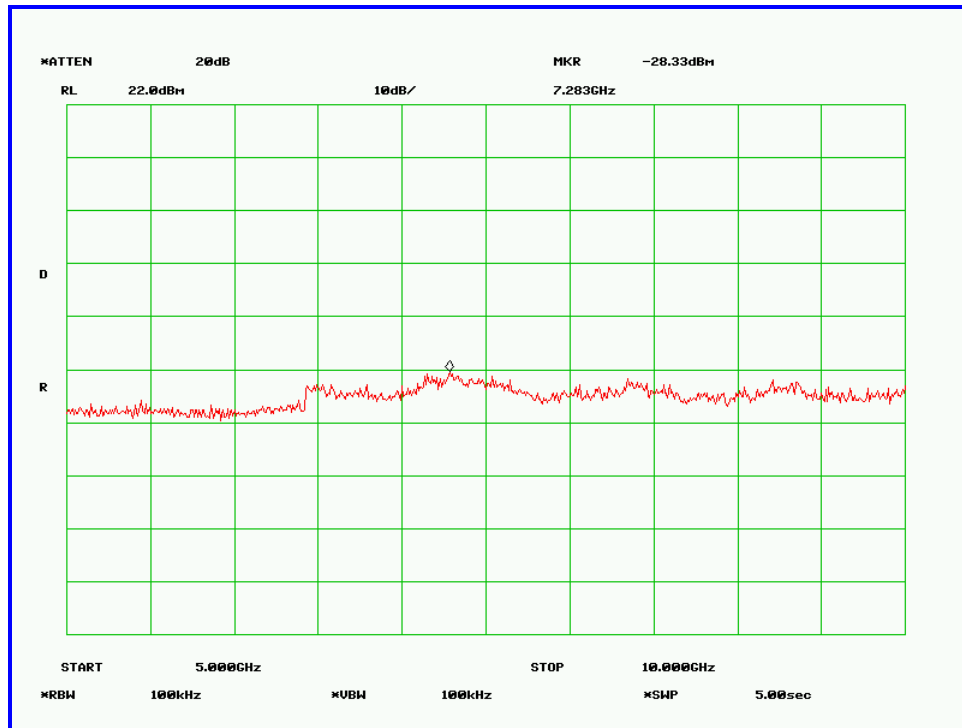



Middle Channel

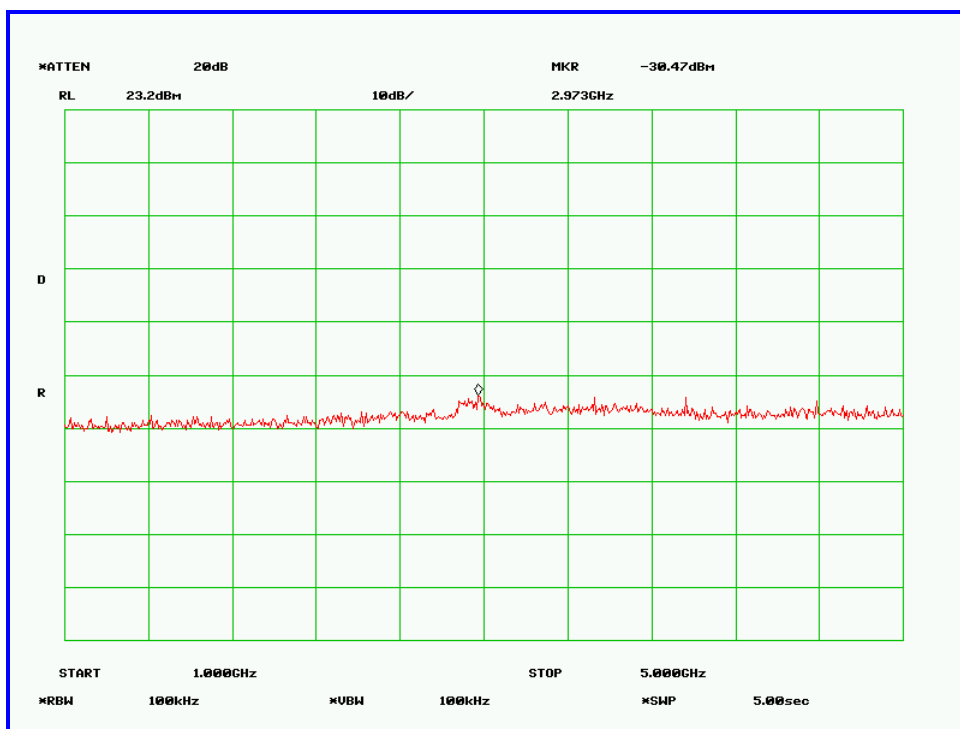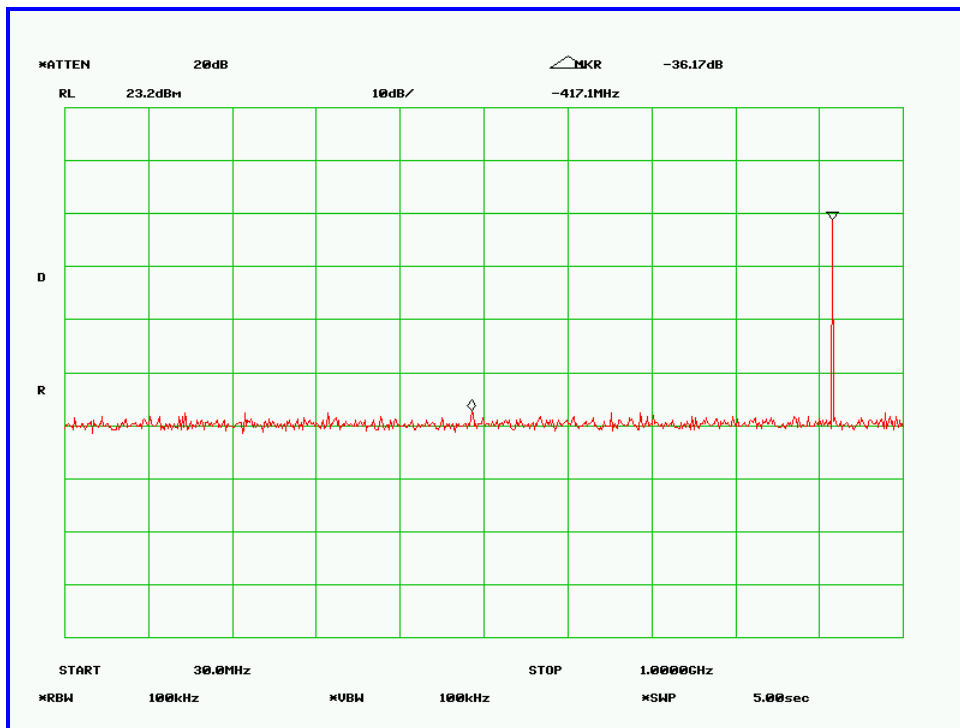


A

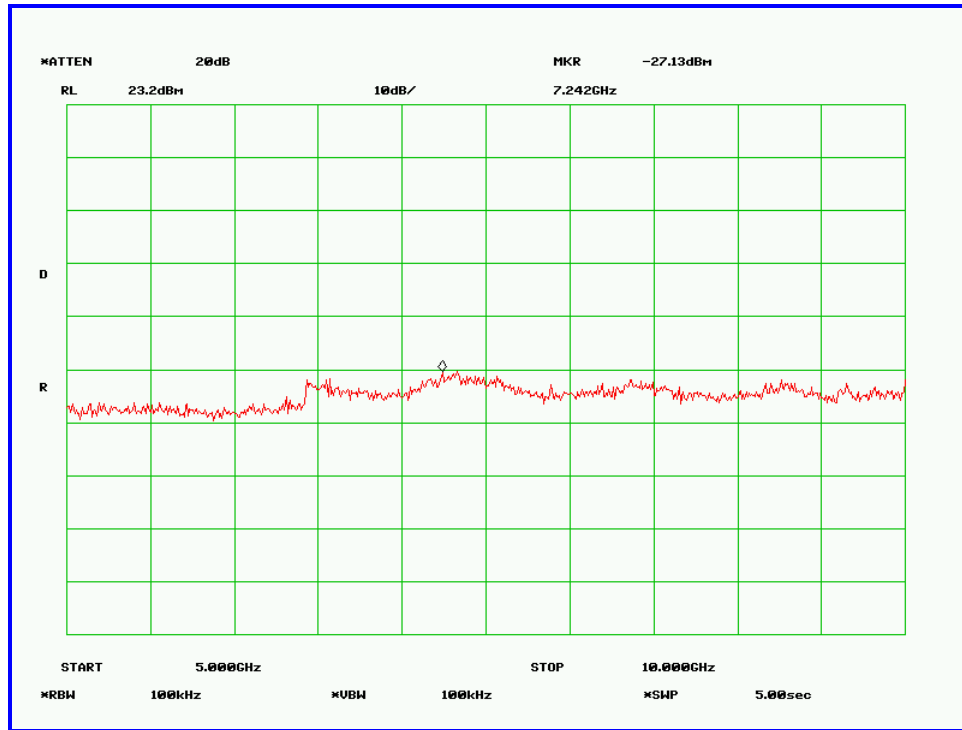

High Channel

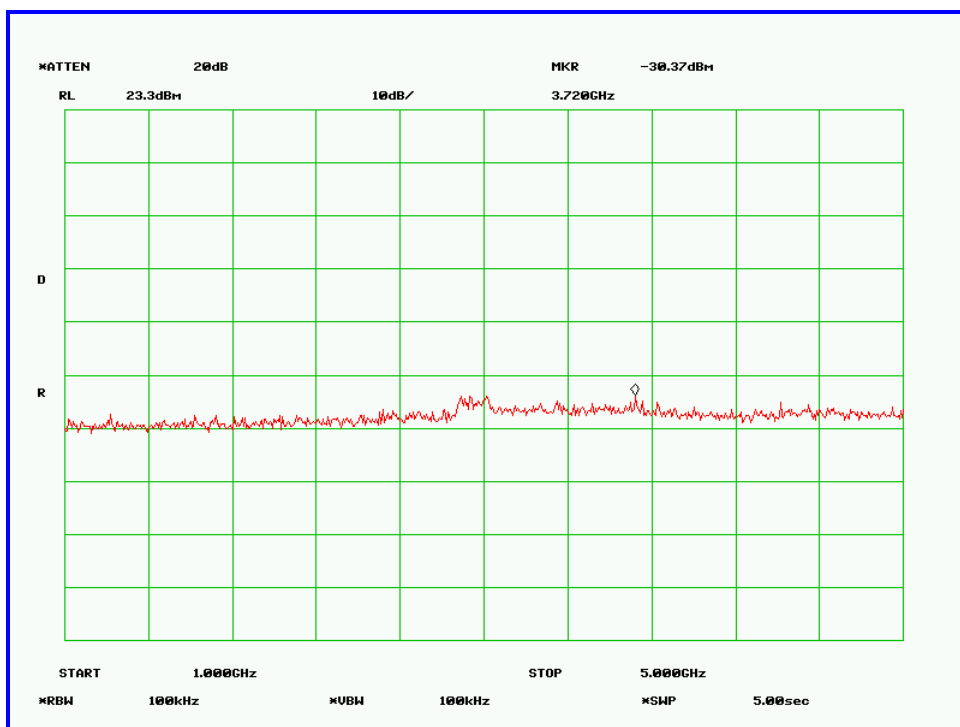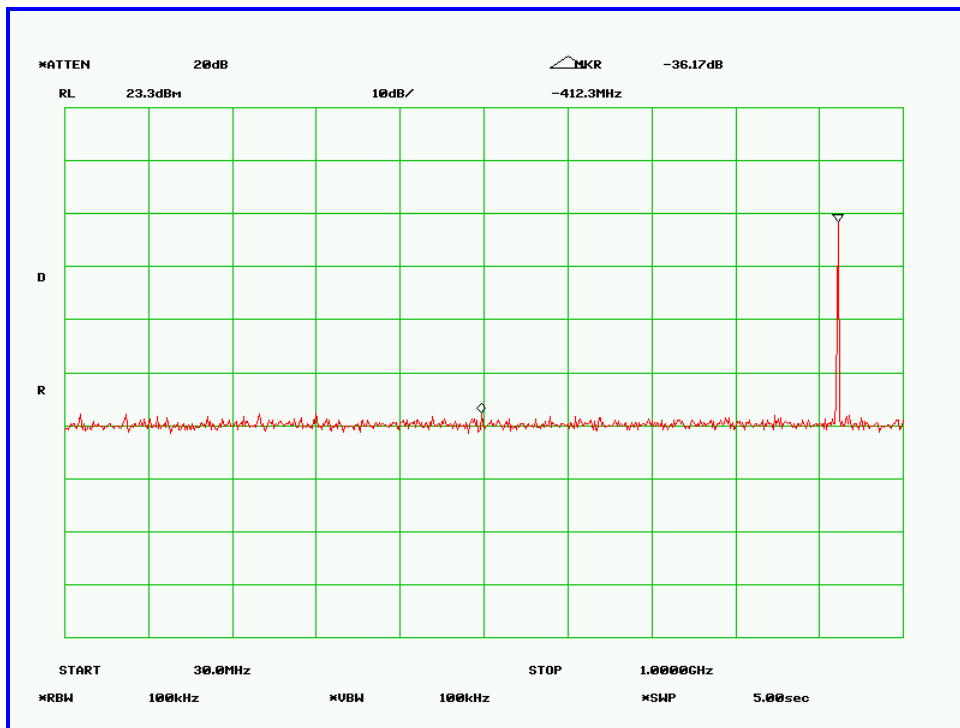

A

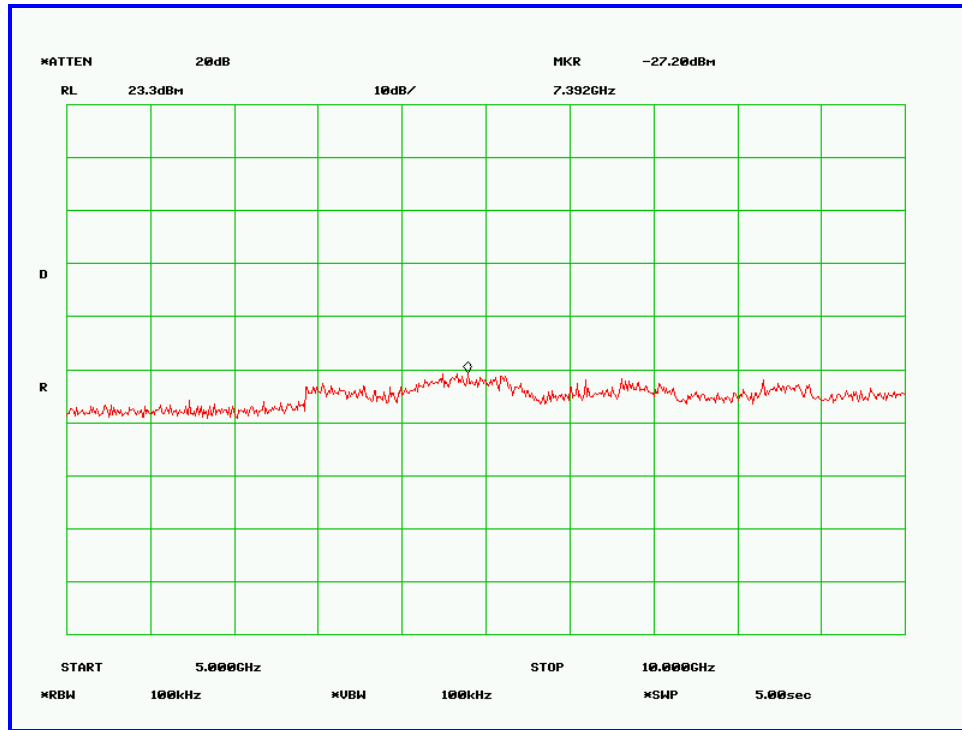

5.10 Radiated Spurious Emission < 1GHz

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz (QP only @ 3m & 10m) is +5.6dB/-4.5dB (for EUTs < 0.5m X 0.5m X 0.5m).
4. Environmental Conditions

Temperature	23°C - 25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar

Test Date : November 28 and December 08, 2008
 Tested By : Dan Corona

Standard Requirement : 47 CFR §15.247(c)


Procedures: Radiated emissions were measured according to ANSI C63.4. The EUT was set to transmit at the highest output power. The EUT was set to transmit at mid channel. Note that setting the channel other than mid, the spurious emissions are the same.

The limit is converted from microvolts/meter to decibel microvolts/meter.

Sample Calculation: Corrected Amplitude = Raw Amplitude (dBμV/m) + ACF(dB) + Cable Loss(dB)

Test Result: Pass


Radiated Emission Plot (Receive mode)

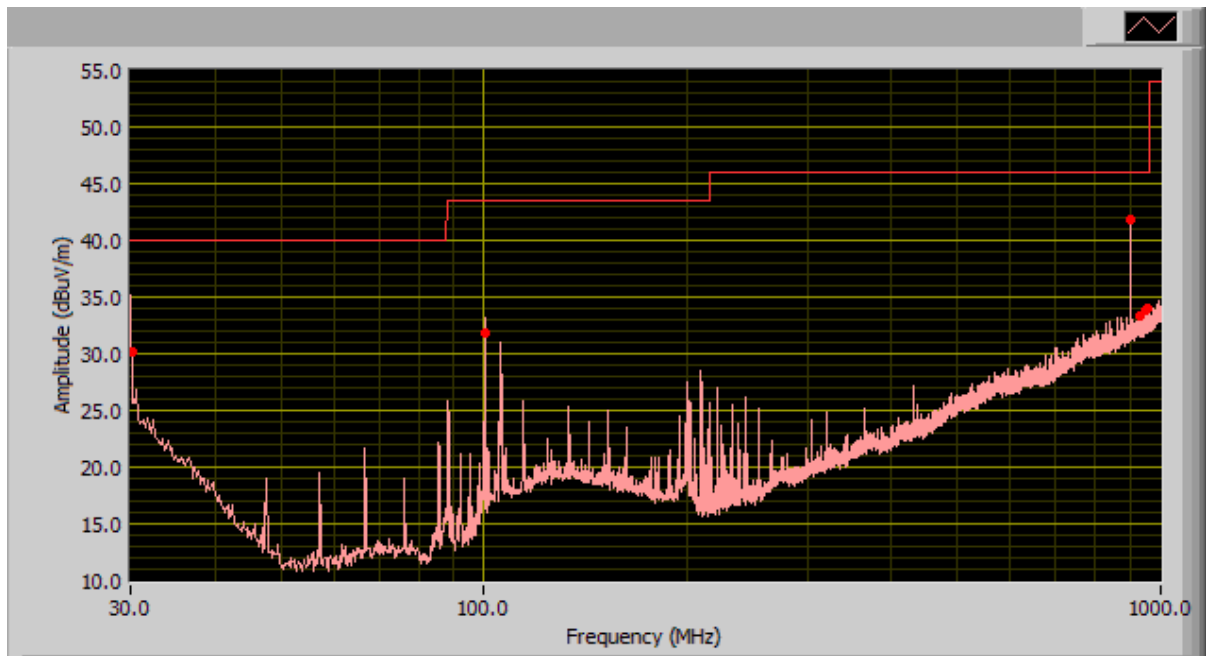

Test Data

Frequency (MHz)	Quasi-Peak (dBμV/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Limit (dBμV/m)	Margin (dB)
905.02	41.84	103.00	H	48.00	46.00	-4.16
30.12	30.00	139.00	H	37.00	40.00	-10.00
100.31	31.91	318.00	V	242.00	43.50	-11.59
932.93	33.35	399.00	H	358.00	46.00	-12.65
957.15	33.93	364.00	H	252.00	46.00	-12.07
951.14	33.90	279.00	H	263.00	46.00	-12.10

Radiated Emission Plot (Transmit mode)

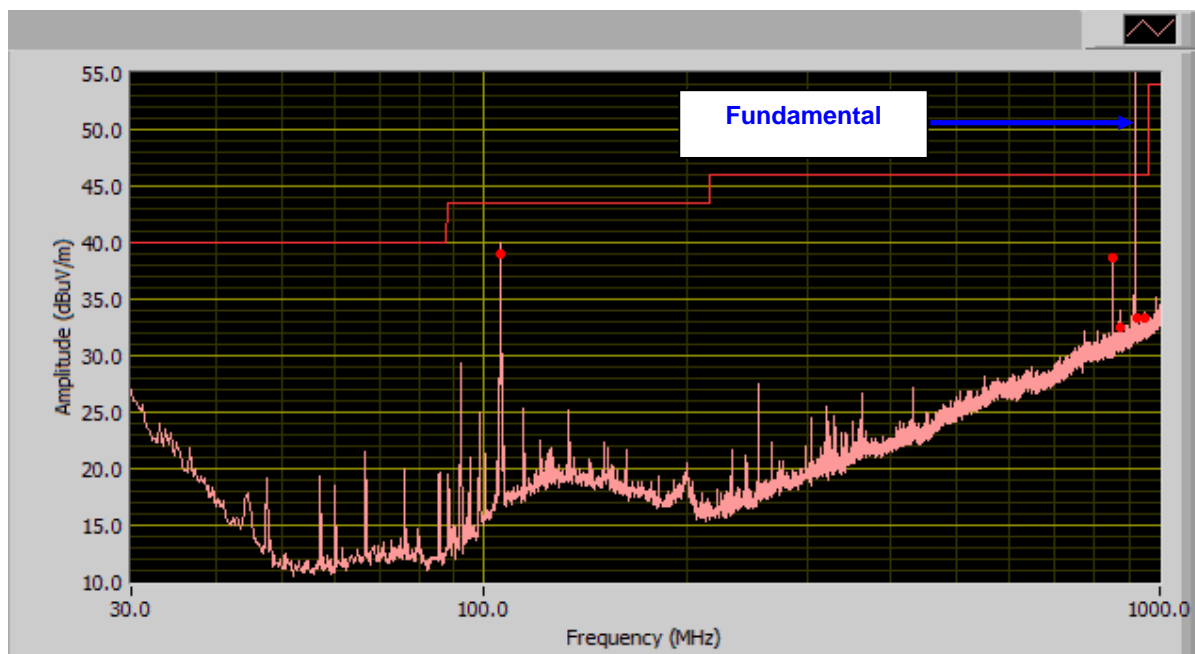

Test Data

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Limit (dB μ V/m)	Margin (dB)
*918.85	87.06	101.00	H	351.00	46.00	*41.06
105.69	42.01	99.00	V	325.00	43.50	-1.49
852.48	38.75	102.00	H	18.00	46.00	-7.25
874.62	32.53	371.00	H	214.00	46.00	-13.47
952.79	33.31	140.00	V	337.00	46.00	-12.69
924.79	33.36	157.00	H	253.00	46.00	-12.64

NOTE: *918.85 MHz is a middle channel carrier frequency of the EUT

5.11 Radiated Spurious Emissions > 1GHz

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 1GHz – 20GH is +5.6dB/-4.5dB (for EUTs < 0.5m X 0.5m X 0.5m).
4. Environmental Conditions

Temperature	23°C - 25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar

Test Date : November 28 and December 08, 2008
 Tested By : Dan Corona

Standard Requirement : 47 CFR §15.247(d)

Procedures: Equipment was setup in a semi-anechoic chamber. For measurements above 1 GHz an average measurement was taken with a 10Hz video bandwidth. The EUT was tested at low, mid and high with the highest output power. Investigated up to 10th harmonics of the operating frequency.

Sample Calculation:

EUT Field Strength = Raw Amplitude(dBμV/m) – Amplifier Gain(dB) + Antenna Factor(dB) + Cable Loss(dB)
 + Filter Attenuation(dB, if used)

Test Result: Pass

@ 904.861MHz @ 3 Meter

Frequency	Reading	Direction	Height	Polar	Antenna Loss	Cable loss	Amplifier	Corrected Reading	Limit	Margin	
1.810	50.70	15.00	1.00	v	26.40	2.16	31.98	47.28	74.00	-26.72	Peak
1.810	48.75	60.00	1.30	h	26.40	2.16	31.98	45.33	74.00	-28.67	Peak
1.810	42.27	15.00	1.00	v	26.40	2.16	31.98	38.85	54.00	-15.15	Ave
1.810	43.54	60.00	1.30	h	26.40	2.16	31.98	40.12	54.00	-13.88	Ave
2.715	37.47	30.00	1.40	v	29.80	2.72	32.08	37.91	74.00	-36.09	Peak
2.715	38.16	75.00	1.10	h	29.80	2.72	32.08	38.60	74.00	-35.40	Peak
2.715	29.47	30.00	1.40	v	29.80	2.72	32.08	29.91	54.00	-24.09	Ave
2.715	31.82	75.00	1.10	h	29.80	2.72	32.08	32.26	54.00	-21.74	Ave

Note: Emission was scanned up to 10GHz; no emissions were detected above the noise floor which was at least 20dB below the specification limit.

@ 918.845MHz @ 3Meter

Frequency	Reading	Direction	Height	Polar	Antenna Loss	Cable loss	Amplifier	Corrected Reading	Limit	Margin	
1.838	45.66	164.00	1.40	v	26.40	2.16	31.98	42.24	74.00	-31.76	Peak
1.838	48.62	14.00	1.00	h	26.40	2.16	31.98	45.20	74.00	-28.80	Peak
1.838	40.67	164.00	1.40	v	26.40	2.16	31.98	37.25	54.00	-16.75	Ave
1.838	43.98	14.00	1.00	h	26.40	2.16	31.98	40.56	54.00	-13.44	Ave
2.757	35.15	16.00	1.10	v	29.80	2.72	32.08	35.59	74.00	-38.41	Peak
2.757	38.42	4.00	1.40	h	29.80	2.72	32.08	38.86	74.00	-35.14	Peak
2.757	29.70	16.00	1.10	v	29.80	2.72	32.08	30.14	54.00	-23.86	Ave
2.757	32.82	4.00	1.40	h	29.80	2.72	32.08	33.26	54.00	-20.74	Ave

Note: Emission was scanned up to 10GHz; no emissions were detected above the noise floor which was at least 20dB below the specification limit.

@ 924.873MHz @ 3Meter

Frequency	Reading	Direction	Height	Polar	Antenna Loss	Cable loss	Amplifier	Corrected Reading	Limit	Margin	
1.850	47.49	64.00	2.10	v	26.40	2.16	31.98	44.07	74.00	-29.93	Peak
1.850	49.28	15.00	1.00	h	26.40	2.16	31.98	45.86	74.00	-28.14	Peak
1.850	41.00	64.00	2.10	v	26.40	2.16	31.98	37.58	54.00	-16.42	Ave
1.850	43.34	15.00	1.00	h	26.40	2.16	31.98	39.92	54.00	-14.08	Ave
2.775	35.04	12.00	1.00	v	29.80	2.72	32.08	35.48	74.00	-38.52	Peak
2.775	38.06	11.00	1.00	h	29.80	2.72	32.08	38.50	74.00	-35.50	Peak
2.775	30.69	12.00	1.00	v	29.80	2.72	32.08	31.13	54.00	-22.87	Ave
2.775	32.52	11.00	1.00	h	29.80	2.72	32.08	32.96	54.00	-21.04	Ave

Note: Emission was scanned up to 10GHz; no emissions were detected above the noise floor which was at least 20dB below the specification limit.

Annex A. TEST INSTRUMENT & METHOD

Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

Instrument	Model	Serial #	Calibration Due
AC Conducted Emissions			
R&S EMI Test Receiver	ESIB40	100179	04/25/2009
R&S LISN	ESH2-Z5	861741/013	04/24/2009
CHASE LISN	MN2050B	1018	04/24/2009
Radiated Emissions			
R&S EMI Test Receiver	ESIB40	100179	04/25/2009
Spectrum Analyzer	HP	8564E	04/26/2009
Com Power Corp Horn Antenna (18GHz to 40GHz)	AH-840	101013	03/19/2010
EMCO Horn Antenna (1-18GHz)	3115	10SL0059	01/04/2009
Sunol Sciences, Inc. antenna (30MHz~2GHz)	JB1	A030702	10/04/2009
Wiltron Signal Generator (10MHz to 40GHz)	68169B	973407	04/25/2009
Com Power Preamplifier (18GHz to 40GHz)	PA-840	181250	05/21/2009
HP Preamplifier (1-18GHz)	8449B	3008A00715	04/24/2009
HP Preamplifier (0.1-1300MHz)	8447F	1937A01160	04/24/2009
Millitech, External Mixer	MHB-06-RD3A0	9259	N/A
MILITECH, External Mixer (Above 40GHz)	MHB-06-RD3AO	9259	N/A
MILITGECH, Horn Antenna (above 40GHz)	WT-KaD	WT28-6	N/A

Annex A.ii. CONDUCTED EMISSIONS TEST DESCRIPTION

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
2. The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipments were powered separately from another main supply.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 KHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

Sample Calculation Example

At 20 MHz	limit = 250 μV = 47.96 dBμV
Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB	
Q-P reading obtained directly from EMI Receiver = 40.00 dBμV (Calibrated for system losses)	
Therefore, Q-P margin = 47.96 – 40.00 = 7.96	i.e. 7.96 dB below limit

Annex A. iii RADIATED EMISSIONS TEST DESCRIPTION


EUT Characterisation

EUT characterisation, over the frequency range from 30MHz to 10th Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer /receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS).

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

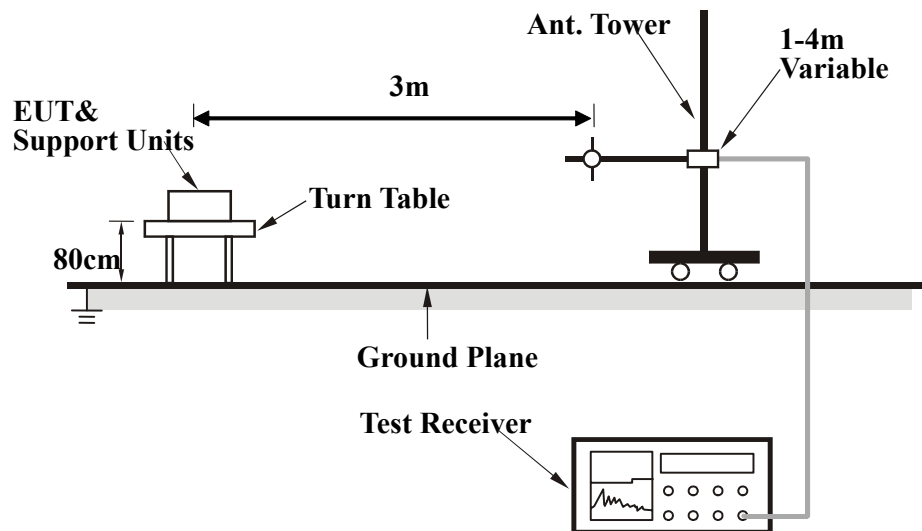

Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

Corr. Factor = Antenna Factor + Cable Factor - Amplifier Gain (if any)

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor or}$$

$$\text{Set RBW} = 1\text{MHz, VBW} = 10\text{Hz.}$$

Note :

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.

Annex B EUT AND TEST SETUP PHOTOGRAPHS

Please see the attachment

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT


EUT TEST CONDITIONS

Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION


The following is a description of supporting equipment and details of cables used with the EUT.

Equipment Description (Including Brand Name)	Model & Serial Number	Cable Description (List Length, Type & Purpose)
None	None	None

Block Configuration Diagram for Radiated Emission

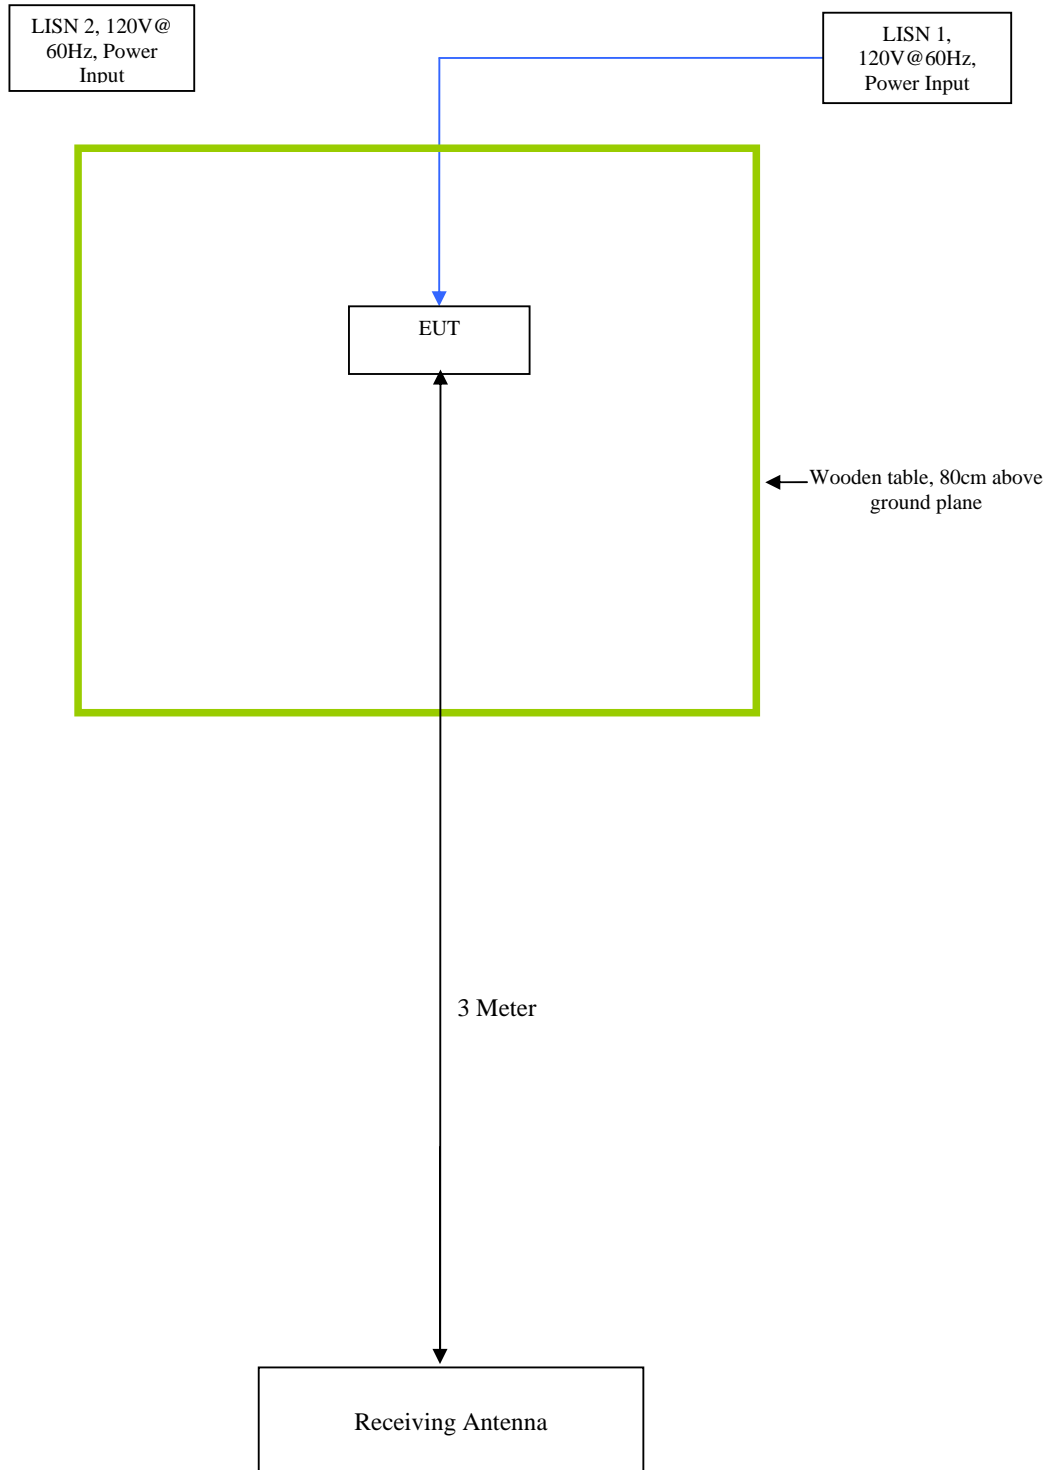

Block Configuration Diagram for Conducted Emission

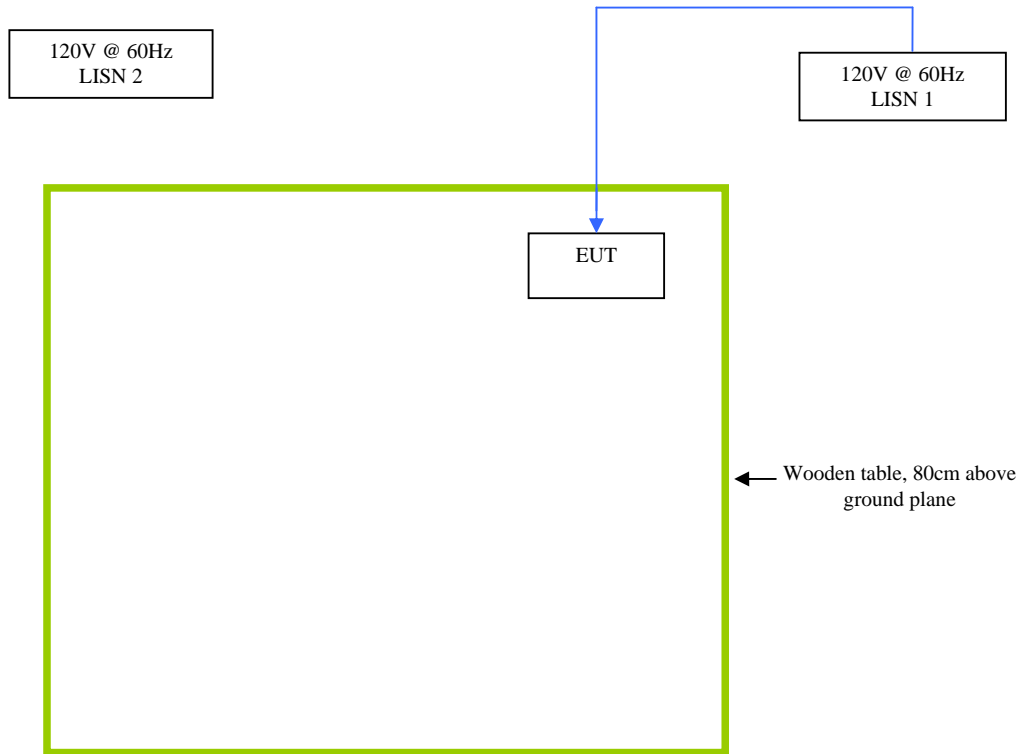

Annex C.ii. EUT OPERATING CONDITIONS

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
Emissions Testing Others Testing	EUT was configured to transmit at full power.

Annex D USER MANUAL, BLOCK & CIRCUIT DIAGRAM

Please see attachment