

Turn up procedure

1. Power on

- a. Connect DC Jack as picture down below b. Turn on the Switch as picture down below



- c. After turning on switch, green LED light will be on (Green LED means that system is normal mode)



2. Down Link Test Configuration(Cellular & PCS)

Down Link Gain Specification

Parameter	Down Link
Gain	57 dB(max)

Down Link Output Power Level

Parameter	Down Link
Output power Level	10 dBm

3. Up Link Test Configuration(Cellular & PCS)

Up Link Gain Specification

Parameter	Up Link
Gain	57 dB(max)

Up Link Output Power Level

Parameter	Up Link
Output power Level	25 dBm

4. Gain control at each path


Step 1. Connect the repeater to network analyzer as below

Step 2. If the gain is not 55 dB, adjust attenuation value.

< Network analyzer>



< Repeater>

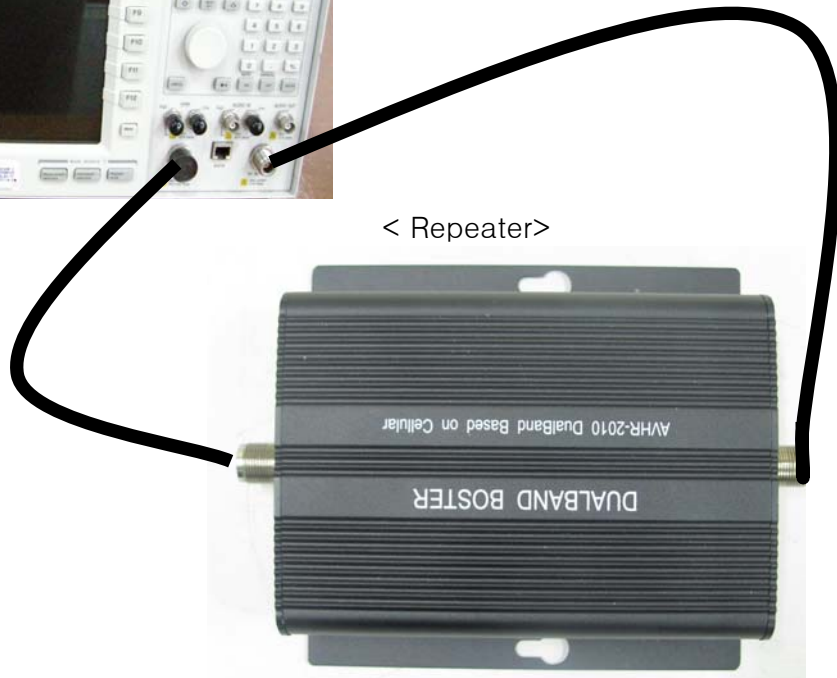

Step 3. Check up-link from spectrum analyzer as below setting.

