

EMT**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

FCC PART 15.519, SUBPART F
*TEST REPORT**for**the***UWB SENSOR****MODEL:MOD10003**

Prepared for

S1 Corporation.
25, Sejong-daero 7-gil, Jung-gu
Seoul, KoreaPrepared by: 
ANDREAS DAVIDSSONApproved by:
KEVIN BOTHMANNELECTRO MAGNETIC TEST, INC.
1547 PLYMOUTH STREET
MOUNTAIN VIEW, CALIFORNIA 94043
(650) 965-4000

DATE: September 12, 2018

REPORT BODY	APPENDICES				TOTAL
	A	B	C	D	
PAGES	27	15	3	2	49

This report shall not be reproduced except in full, without the written approval of Electro Magnetic Test, Inc.

**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

REVISION HISTORY

REVISION	DATE	COMMENTS	MODIFIED BY
-	January 22, 2018	Original Document	-
V2	February 2, 2018	Updated limits and minor fixes from comments for certification.	Andreas Davidsson
V3	August 13, 2018	Updated to include a test for the requirements of 15.519(a)(1)	Andreas Davidsson
V4	August 31, 2018	Updated points from comments for certification.	Andreas Davidsson
V5	September 12, 2018	Added conducted emissions data and updated points from comments for certification.	Andreas Davidsson



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

TABLE OF CONTENTS

LIST OF APPENDICES	5
GENERAL REPORT SUMMARY.....	6
SUMMARY OF TEST RESULTS	7
1. PURPOSE.....	9
2.1 Location of Testing	10
2.2 Traceability Statement	10
2.3 Cognizant Personnel	10
2.4 Date Test Sample was Received	10
2.5 Disposition of the Test Sample	10
2.6 Abbreviations and Acronyms.....	10
3. APPLICABLE DOCUMENTS.....	11
4. DESCRIPTION OF TEST CONFIGURATION	12
4.1 Description of Test Configuration – EMI	12
4.1.1 <i>Cable Construction and Termination.....</i>	13
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	14
5.1 EUT and Accessory List	14
5.2 EMI Test Equipment.....	15
6. TEST SITE DESCRIPTION.....	17
6.1 Test Facility Description	17
6.2 EUT Mounting, Bonding and Grounding	17
6.3 Facility Environmental Characteristics	17
7. TEST PROCEDURES.....	18
7.1 Operational Limitations	18
7.2 Radiated Emissions.....	19
7.2.1 <i>Limits.....</i>	19
7.2.2 <i>Test Procedure (Radiated)</i>	20
7.2.3 <i>Radiated Emissions Test - >1GHz</i>	21
7.3 UWB Bandwidth	22
7.3.1 <i>Limit (FCC PART 15 Section 15.519(b), 15.503(d)).....</i>	22
7.3.2 <i>Test Procedure</i>	22
7.3.3 <i>Test Result</i>	22
7.4 Radiated Emissions in GPS Bands	23
7.4.1 <i>Limit (FCC PART 15 Section 15.519(b), 15.503(d)).....</i>	23
7.4.2 <i>Test Procedure</i>	23
7.4.3 <i>Test Result</i>	23
7.5 Peak Emissions within a 50 MHz Bandwidth	24
7.5.1 <i>Limit (FCC PART 15 Section 15.519(e)).....</i>	24
7.5.2 <i>Test Procedure</i>	24
7.5.3 <i>Test Result</i>	24
7.5.4 <i>Note in regards to peak emission compared to Occupied Bandwidth results.</i>	24
7.6 Transmission Requirements	25
7.6.1 <i>Limit (FCC PART 15 Section 15.519(a)(1)).....</i>	25
7.6.2 <i>Test Procedure</i>	25
7.6.3 <i>Test Result</i>	25
7.7 Antenna Requirement	26
7.7.1 <i>Requirement (FCC PART 15 SECTION 15.203).....</i>	26
7.7.2 <i>Test Result</i>	26
7.8 Conducted Emissions Test – Mains Ports.....	27
7.8.1 <i>Test Result</i>	27
8. CONCLUSIONS / COMPLIANCE STATEMENT	28
APPENDIX A.....	A1
APPENDIX B.....	B1
APPENDIX C.....	C1
APPENDIX D.....	D1

EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000



ELECTRO MAGNETIC TEST, INC.
1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

LIST OF APPENDICES

APPENDIX	TITLE
A	Radiated and Conducted Data Sheets <ul style="list-style-type: none"> • Radiated Emissions Test Data • Peak Emissions Test Data • UWB Bandwidth Test Data • Conducted Emissions Test Data
B	Test Setup Diagrams
C	Modifications To The EUT
D	Additional Models Covered Under This Report

LIST OF FIGURES

FIGURE	TITLE
1	Layout of 5 Meter Semi-Anechoic Chamber
2	Conducted Emissions Test Setup



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Electro Magnetic Test, Inc., which is an independent testing and consulting firm. The test report is based on testing performed Electro Magnetic Test, Inc. personnel according to the measurement procedure described in the test specification given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full.

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Federal Government.

The measurement data and conclusions contained in this test report are deemed satisfactory evidence of compliance with Industry Canada Interference-Causing Equipment Standard ICES-003, Issue 5, August 2012.

Electro Magnetic Test, Inc. is recognized by the following agencies for performing EMI/EMC testing:

COUNTRY	AGENCY	IDENTIFYING #
USA	Federal Communications Commission (FCC) (EMT's test site is recognized by the FCC)	Registration Number: 90576
USA, Canada, Taiwan, Australia/New Zealand, European Community	National Voluntary Lab Accreditation Program (NVLAP) (EMT is accredited by NVLAP. A copy of the NVLAP Scope Of Accreditation is available upon request.)	Lab Code: 200147-0
Canada	Industry Canada	File No.: IC 2804
Japan	Voluntary Control Council For Interference (VCCI)	A-0118
	Open Field Test Site "A"	-
	Mains Conducted Emissions Test Site "D"	-
	Telecom Conducted Emissions Test Site "D"	-
	3 Meter Semi-Anechoic Chamber Site "E"	-
	3 Meter Semi-Anechoic Chamber Site "E" (1GHz – 6GHz)	-
	Mains Conducted Emissions Test Site "E"	-
	Telecom Conducted Emissions Test Site "E"	-
Korea	Ministry of Information and Communication's Radio Research Laboratory (RRL) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (A copy of the Scope Of Accreditation is available upon request)	US0036
Taiwan	Bureau Of Standards, Metrology and Inspection (BSMI)	Reference Number: SL2-IN-E-1024
Australia / New Zealand	Australian Communications Authority (AUSTEL)	*

*These agencies do not issue an identifying number to test labs.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

GENERAL REPORT SUMMARY (CONTINUED)

Device Tested: UWB SENSOR
Model:MOD10003
S/N: N/A

Product Description: The UWB Sensor is used to detect movement of an intruder using radio.

Modifications: The EUT was not modified during the testing.

Manufacturer: S1 Corporation
25, Sejong-daero 7-gil, Jung-gu
Seoul, Korea

Test Date(s): January 26, 2018, August 13, 2018, August 31, 2018, September 12, 2018.

Test Specifications: EMI requirements
Limits: FCC Title 47, Part 15 Subpart F, Section 15.519
Test Procedure: ANSI C63.10.2013

Test Deviations: The test procedure was not deviated from during the testing.

SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	FCC STANDARD	REMARKS	RESULTS
7.1	Operational Limitations	15.519(a)	Radiated	The Client has been notified of these limitations. In normal operating mode the transmitter will only send data when associated with a receiver. See section 7 for detail.
7.2	Radiated Emissions	15.519(c)	Radiated	PASS
7.3	UWB Bandwidth	15.519(b)	Radiated	PASS
7.4	Radiated Emissions in GPS Bands	15.519(d)	Radiated	PASS
7.5	Peak Emissions within a 50 MHz Bandwidth	15.519(e)	Radiated	PASS
7.6	Antenna Requirement	15.203	N/A	PASS
7.7	Conducted RF Emissions, 150 kHz - 30 MHz.	CISPR 11: 2009 plus A1:2010	Conducted	PASS



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

TECHNICAL DESCRIPTION OF THE EUT

Manufacturer:	S1 CORPORATION.
Manufacturer Address:	25, Sejong-daero 7-gil, Jung-gu, Seoul, Korea
EUT Name:	UWB SENSOR
Model No:	MOD10003
Operation frequency:	7500 to 8500 MHz
Maximum Output Power:	67.15 dB μ v @ 3m



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the UWB SENSOR Model: MOD10003. The EMI measurements were performed according to the measurement procedure described in ANSI C63.10-2013. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the specification limits defined in FCC Title 47, Part 15, Subpart F, Section 15.519.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

2. ADMINISTRATIVE DATA

2.1 Location of Testing

The EMI tests described herein were performed at the test facility of Electro Magnetic Test, Inc., 1547 Plymouth Street, Mountain View, California, 94043.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The measurement results in this report and the calibration of the test equipment are traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

S1 Corporation.

Choong-Yul Cho Managing Researcher

Electro Magnetic Test, Inc.

Alok Patel	Test Technician
Andreas Davidsson	Test Technician
David Vivanco	Test Technician
Simeet Gandhi	Test Technician
Manan Modi	Test Technician
Sagar Bombaywala	Test Technician
Kevin Bothmann	Lab Manager

2.4 Date Test Sample was Received

The test sample was received on October 31, 2017.

2.5 Disposition of the Test Sample

The test sample has not yet been returned to S1 Corporation..

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
CISPR	International Special Committee On Radio Interference
FCC	Federal Communications Commission

**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
FCC Title 47, Part 15, Subpart F	FCC Rules - Radio frequency devices, Ultra Wideband Operation
FCC Publication KDB393764	Ultra-Wide Band (UWB) Device Frequently Asked Questions, July 31, 2015
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.
CISPR 11: 2009 plus A1:2010	Industrial, scientific and medical (ISM) radio frequency equipment - Radio disturbance characteristics - Limits and methods of measurement



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration – EMI

During testing the UWB radio was continuously transmitting except in the case of the transmission requirement testing, where the UWB was set up to transmit to an associated receiver following FCC guidance.

It was determined that the emissions were at their highest level when the EUT was operating in the above configuration. The cables were moved to maximize the emissions and EUT emissions were investigated in all 3 orthogonal planes. The final radiated data was taken in this mode of operation. All initial investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the photographs in Appendix B.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

4.1.1 Cable Construction and Termination

Cable #1

This is an unshielded power cable connecting the EUT to the DC power supply.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

5.1 EUT and Accessory List

EQUIPMENT TYPE	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID
UWB SENSOR(EUT)	S1 Corporation.	MOD10003	N/A	Q54MOD10003
DC Power Supply	Mastech	HY1803DL	243591	DoC



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
Spectrum Analyzer	Hewlett Packard	8566B	3024A20115	September 30, 2017	1 Year
RF Preselector	Hewlett Packard	85685A	3010A01157	September 30, 2017	1 Year
Quasi-Peak Adapter	Hewlett Packard	85650A	2430A00451	September 30, 2017	1 Year
Radiated EMI Software	Sector Design	N/A	Ver.1.4.6	N/A	N/A
EMI Receiver (Conducted EMI)	Rohde & Schwarz	ESU40	100295	July 18, 2018	1 Year
Conducted EMI Software	ETS-Lindgren	Tile!	Rev. 7.0.12.697	N/A	N/A
Preamplifier	Hewlett Packard	8447D	1937A02579	March 5, 2018	1 Year
RF Attenuator	Com Power	LIT-153A	531175	December 15, 2017	1 Year
LISN	Solar Electronics	Type 21107-50-TS-50-N	21107150701	January 2, 2018	1 Year
LISN	Solar Electronics	Type 21107-50-TS-50-N	21107150702	January 2, 2018	1 Year
LISN	Solar Electronics	Type 21107-50-TS-50-N	21107150703	January 2, 2018	1 Year
LISN	Solar Electronics	Type 21107-50-TS-50-N	21107150704	January 2, 2018	1 Year
TLISN (CAT5)	Fischer	F-071115-1057-1-09	091407	August 21, 2017	1 Year
LCL Adaptor	Fischer	T8ALCL-1	091407.02	August 21, 2017	1 Year
Biconical Antenna	Com Power	AB-100	01557	July 21, 2018	1 Year
Log Periodic Antenna	Com Power	AL-100	16001	June 20, 2017	1 Year
Antenna Mast	Com Power	AM-400	N/A	N/A	N/A
Turntable	Com Power	TT-100	N/A	N/A	N/A
Computer	Dell, Inc.	DHS	DNSV641	N/A	N/A
Printer	Hewlett Packard	C8124A	CN39A220ZD	N/A	N/A



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

5.2 EMI Test Equipment (Continued)

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. CYCLE
AC Power Source	California Instruments	5001iX-208	59036	August 30, 2017	1 Year
Harmonic/Flicker Meter	California Instruments	PACS-1	72711	August 30, 2017	1 Year
Harmonic/Flicker Test Software	California Instruments	CTS 4.0	V4.14.0	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESU40	100127	February 2, 2018	1 Year
EMI Test Software	Rohde & Schwarz	EMC32	V8.54.0	N/A	N/A
BiConiLog Antenna	ETS-Lindgren	3143B	00206757	April 24, 2018	1 Year
Horn Antenna	ETS-Lindgren	3117	00109294	July 14, 2018	1 Year
Preamplifier	Rohde & Schwarz	TS-PR18	100056	December 12, 2017	1 Year
Antenna Mast	ETS-Lindgren	2171B	00150364	N/A	N/A
Turntable	ETS-Lindgren	2187-3.0	00118231	N/A	N/A
Computer	Dell, Inc.	Optiplex 745	4T50WC1	N/A	N/A
Multi-Function Controller	ETS-Lindgren	2090	00102270	N/A	N/A

**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to the table below and section 7 of this report for the details of which sites were used for testing. All sites are located at 1547 Plymouth Street, Mountain View, California 94043.

Site Used For Test	Site Description
	Open Field Test Site "A"
X	Mains Conducted Emissions Test Site "D"
X	3 Meter Semi-Anechoic Chamber Site "E"
	Mains Conducted Emissions Test Site "E"

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane, with the height increased to 1.5 meters for radiated emissions testing above 1 GHz.

The EUT was not grounded.

6.3 Facility Environmental Characteristics

All tests were performed in a climate controlled building. The temperature was 23° C, humidity 53%, and barometric pressure 102.7 kPa.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7. TEST PROCEDURES

7.1

Operational Limitations

FCC 47 CFR Section 15.519 (a) (1)

A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

The EUT was tested for this requirement and found to comply, please see the datasheets in Appendix A for the measurement results.

FCC 47 CFR Section 15.519 (a) (2)

The use of antennas mounted on outdoor structures, e.g., antennas mounted on the outside of a building or on a telephone pole, or any fixed outdoors infrastructure is prohibited. Antennas may be mounted only on the hand held UWB device.

The client has been informed of this requirement.

FCC 47 CFR Section 15.519 (a) (3)

UWB devices operating under the provisions of this section may operate indoors or outdoors.

The client has been informed of this requirement.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7.2

Radiated Emissions

7.2.1

Limits

General Requirements Limit (FCC PART 15 Section 15.209(a)(1))

Frequency of Emission (MHz)	Field Strength		Measurement Distance (Meters)
	μ V/m	dB μ V/m	
0.009-0.49	2400/F(kHz)		300
0.49-1.705	24000/F(kHz)		30
1.705-30	30		30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960*	500*	54*	3*

*Not applicable for above 960 MHz measurements

(FCC PART 15 Section 15.519(c))

The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

**7.2.2****Test Procedure (Radiated)**

The Rohde & Schwarz ESU40 EMI receiver was used as a measuring meter while under software control by the Rohde & Schwarz EMC32 software. The built in preamplifier was used to increase the sensitivity of the instrument. The EMI receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the EMI receiver records the highest measured reading over all the sweeps. The built in quasi-peak adapter was used only for those readings which are marked accordingly on the data sheets. The effective measurement bandwidth used for the radiated emissions test was 120 kHz from 30 MHz to 1 GHz.

A broadband BiConiLog antenna was used as a transducer during the measurement. The BiConiLog antenna was used from 30 MHz to 1000 MHz. The frequency spans were wide (30 MHz to 88 MHz, 88 MHz to 216 MHz, 216 to 300 MHz, and 300 MHz to 1 GHz) during preliminary investigations. The final data was taken with a frequency span of 1 MHz. Furthermore, the frequency span was reduced during the preliminary investigations as deemed necessary.

The 5 meter semi-anechoic chamber of Electro Magnetic Test, Inc. was used for radiated emission testing. This test site is set up according to CISPR 16-1-1. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength).

The presence of non EUT signals was verified by turning the EUT off. In case a non EUT signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the other signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance from 30 MHz to 1 GHz. to obtain final test data.

Calculation Of Radiated Emission Test Data:

Amplitude - Gain + Antenna Factor + Cable Loss = Corrected Amplitude

Corrected Amplitude - Limit = Margin

Associated with the radiated emission test data in this report is a ± 4.5 dB measurement uncertainty.

**7.2.3****Radiated Emissions Test - >1GHz**

The Rohde & Schwarz ESU40 EMI receiver was used as a measuring meter while under software control by the Rohde & Schwarz EMC32 software. An external preamplifier was used to increase the sensitivity of the instrument. The EMI receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the EMI receiver records the highest measured reading over all the sweeps. The built in average detector was used only for those readings which are marked accordingly on the data sheets. The effective measurement bandwidth used for the radiated emissions test was 1 MHz from 1 GHz to 40 GHz.

A broadband horn antenna was used as a transducer during the measurement. The horn antenna was used from 1 GHz to 40 GHz. The frequency spans were wide (1 GHz to 40 GHz) during preliminary investigations. The final data was taken with a frequency span of 1 MHz. Furthermore, the frequency span was reduced during the preliminary investigations as deemed necessary.

The 5 meter semi-anechoic chamber of Electro Magnetic Test, Inc. was used for radiated emission testing. This test site is set up according to CISPR 16-1-1. The site is set up for a "free space" environment which includes absorber placed on the ground plane between the EUT and the antenna. Please see section 5.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength).

The presence of non EUT signals was verified by turning the EUT off. In case a non EUT signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the other signal does not hide any emissions from the EUT. The EUT was tested at a 3 meter test distance from 1 GHz to 40 GHz. to obtain final test data.

Calculation Of Radiated Emission Test Data:

Amplitude - Gain + Antenna Factor + Cable Loss = Corrected Amplitude

Corrected Amplitude - Limit = Margin

When applicable, the exclusion band with a lower limit of the lowest allocated frequency -5% and a higher limit of the highest allocated frequency +5% was applied to the unit during transmit mode.

Associated with the radiated emission test data in this report is a ± 4.5 dB measurement uncertainty.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7.3 UWB Bandwidth

7.3.1 Limit (FCC PART 15 Section 15.519(b), 15.503(d))

FCC PART 15 Section 15.519(b)

(b) The UWB bandwidth of a UWB system operating under the provisions of this section must be contained between 3100 MHz and 10600 MHz

Limit
UWB bandwidth within 3100 MHz and 10600 MHz

FCC PART 15 Section 15.503(d)

Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fraction bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth

Limit
Fractional Bandwidth ≥ 0.20 Or UWB Bandwidth (10 dB below highest radiated emission) ≥ 500 MHz

7.3.2 Test Procedure

Set EUT and test equipment as indicated in Radiated Emissions Procedure

RBW: 1 MHz

VBW: $\geq 3 \times$ RBW

Detector: Peak

Trace Mode: Max Hold

- (1) Set analyzer center frequency to center of signal
- (2) Turn on marker peak search mode
- (3) Turn on ndb down
- (4) Set measurement to 10 db down

7.3.3 Test Result

The EUT meets the requirements. Please see the datasheets in Appendix A for the measurement results.

**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7.4 Radiated Emissions in GPS Bands

7.4.1 Limit (FCC PART 15 Section 15.519(b), 15.503(d))

In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3

7.4.2 Test Procedure

Set EUT and test equipment as indicated in Radiated Emissions Procedure

RBW: 1 MHz

VBW: $\geq 3 \times$ RBW

Detector: Peak

Trace Mode: Max Hold

- (1) Set analyzer center frequency to 1164-1240 MHz
- (2) Wait for the result to stabilize.
- (3) Repeat for Frequency range 1559-1610 MHz.

7.4.3 Test Result

The EUT meets the requirements. Please see the datasheets in Appendix A for the measurement results.

**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7.5 Peak Emissions within a 50 MHz Bandwidth**7.5.1 Limit (FCC PART 15 Section 15.519(e))**

There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, $f(m)$. That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, follow the procedures described in 15.521

Limit
0 dBm EIRP when using 50 MHz measurement bandwidth

7.5.2 Test Procedure

Set EUT and test equipment as indicated in Radiated Emissions Procedure

RBW: 10 MHz

VBW: \geq RBW

Detector: Peak

Trace Mode: Max Hold

- (1) Set analyzer center frequency to center of signal
- (2) Let trace complete and turn on marker peak search mode
- (3) Apply correction factor as measurement cannot be done at 50 MHz bandwidth

7.5.3 Test Result

The EUT meets the requirements. Please see the datasheets in Appendix A for the measurement results and relevant calculations.

7.5.4 Note in regards to peak emission compared to Occupied Bandwidth results.

On this test the peak emission was found to be at 7.9423 GHz, as compared to the peak emission at 7.9231 GHz on the Occupied Bandwidth test, the reason behind this is due to the further detail allowed when zooming in allows the peak to become more clear.

**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7.6 Transmission Requirements

7.6.1 Limit (FCC PART 15 Section 15.519(a)(1))

A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgement of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

Limit
The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received.

7.6.2 Test Procedure

Set EUT and test equipment as indicated in Radiated Emissions Procedure

RBW: 1 MHz

VBW: \geq RBW

Detector: Peak

Trace Mode: Max Hold

- (1) Turn on EUT with associated receiver.
- (2) Set analyzer center frequency to center of signal.
- (3) Set analyzer span to 0MHz.
- (4) Set analyzer sweep time to 60 seconds.
- (5) Turn off EUT and associated receiver.
- (6) Restart scan on analyzer and turn on EUT but not the associated receiver.
- (7) Wait for EUT signal to stop broadcasting.
- (8) Measure delta on start of transmission and stopping of transmission.

7.6.3 Test Result

The EUT meets the requirements. Please see the datasheets in Appendix A for the measurement results and relevant calculations.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7.7

Antenna Requirement

7.7.1

Requirement (FCC PART 15 SECTION 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

7.7.2

Test Result

The antenna is permanently attached.

**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

7.8

Conducted Emissions Test – Mains Ports

The Rohde & Schwarz ESU40 EMI was used as a measuring meter along with the HP 85650A quasi-peak adapter. The data was collected with the spectrum analyzer in the peak detect mode with the "Max Hold" feature activated. The quasi-peak detector was used only where indicated in the data sheets. A 10 dB attenuation pad was used for the protection of the spectrum analyzer input stage, and the spectrum analyzer offset was adjusted accordingly to read the actual data measured. The LISN output was read by the Rohde & Schwarz ESU40 EMI. The output of the second LISN was terminated by a 50 ohm termination. The effective measurement bandwidth used for the conducted emissions test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4: 2014. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The initial test data was taken in manual mode while scanning the frequency ranges of 0.15 MHz to 1.6 MHz, 1.6 MHz to 5 MHz and 5 MHz to 30 MHz. The conducted emissions from the EUT were maximized for operating mode as well as cable and peripheral placement. Once a predominant frequency (within 12 dB of the limit) was found, it was more closely examined with the spectrum analyzer span adjusted to 1 MHz.

The final data was collected under program control by the ETS-Lindgren Tile! software in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave.

Associated with the conducted emission test data in this report is a ± 3.4 dB measurement uncertainty.

7.8.1

Test Result

The EUT meets the requirements. Please see the datasheets in Appendix A for the measurement results and relevant calculations.



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

8. CONCLUSIONS / COMPLIANCE STATEMENT

Based upon the results contained in this report, Electro Magnetic Test, Inc. has determined that the UWB SENSOR, Model:MOD10003 meets all of the specification limits defined in FCC Title 47, Part 15, Subpart F, Section 15.519

EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

APPENDIX A

RADIATED AND CONDUCTED DATA SHEETS

EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions

EUT:	UWB SENSOR	Model Name:	MOD10003
Test Mode:	UWB	Test Date:	9/12/2018
Test Engineer:	Andreas Davidsson	Measurement:	30 MHz to 1 GHz

Limit Calculation (960 GHz to 1.610 GHz):


$$E(\text{dBuV/m}) = 95.2 + \text{EIRP(dBm)}$$

Distance = 3 M

$$E(\text{dBuV/m}) = 95.2 + (-75.3)$$

$$E(\text{dBuV/m}) = 19.9$$

FCC 15.519 (c) 30-1000MHz Radiated Scan 3m PK AVG

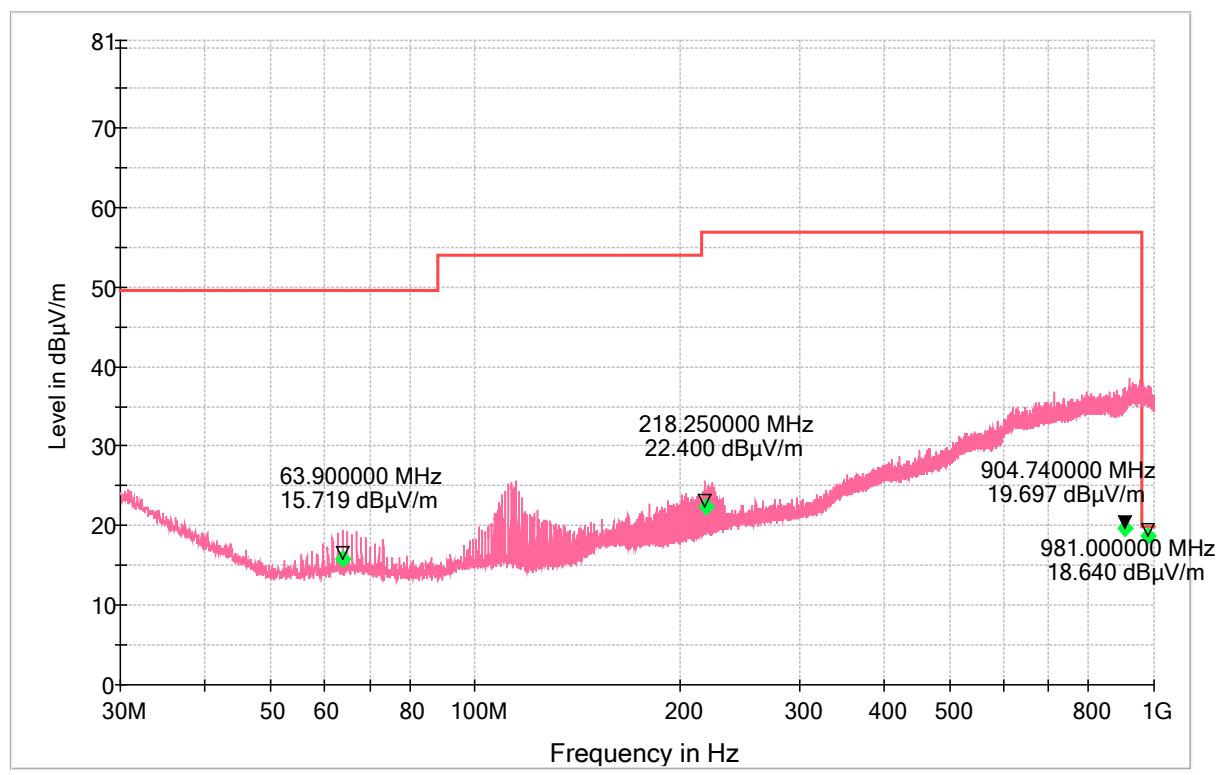

EMT**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions

EUT:	UWB SENSOR	Model Name:	MOD10003
Test Mode:	UWB	Test Date:	9/12/2018
Test Engineer:	Andreas Davidsson	Measurement:	1GHz to 1.610 GHz

Limit Calculation (1 GHz to 1.610 GHz):


$$E(\text{dBuV/m}) = 95.2 + \text{EIRP(dBm)}$$

Distance = 3 M

$$E(\text{dBuV/m}) = 95.2 + (-75.3)$$

$$E(\text{dBuV/m}) = 19.9$$

FCC 15.519 (c) 1000-1610MHz Radiated Scan 3m PK AVG

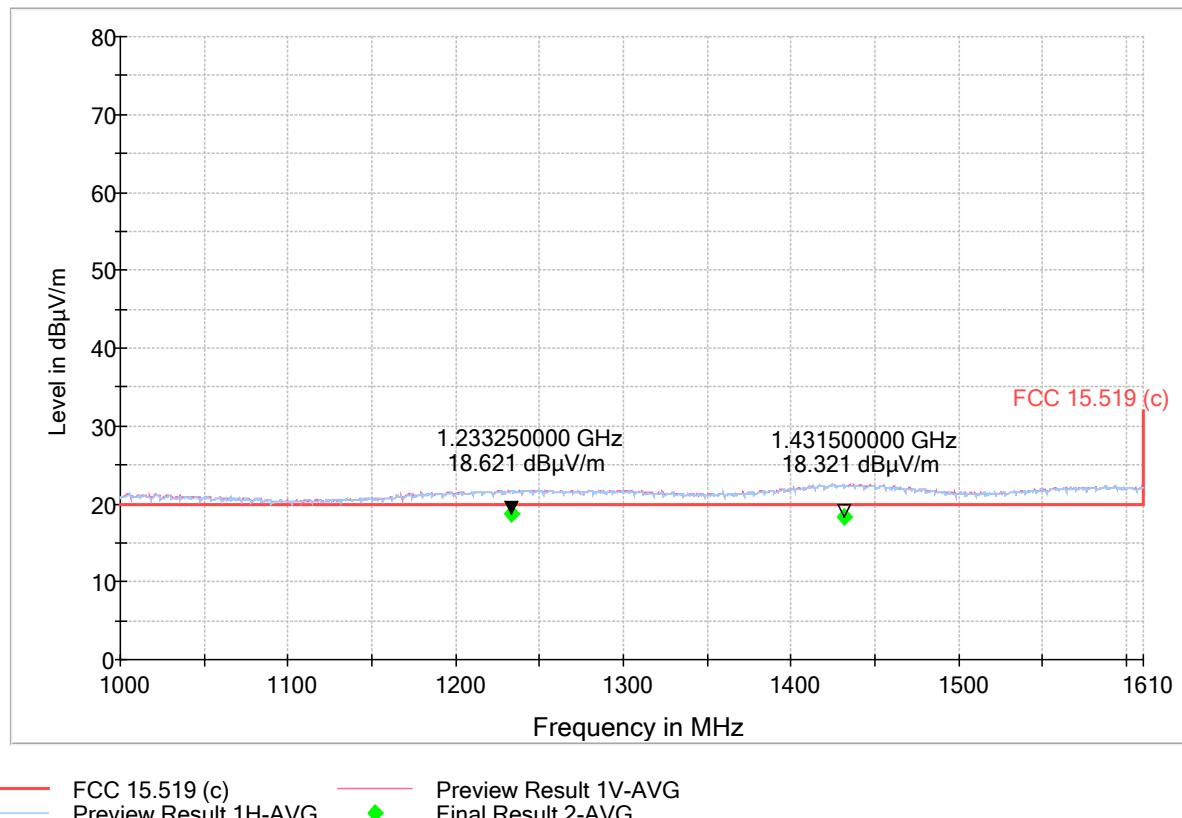



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions

EUT:	UWB SENSOR	Model Name:	MOD10003
Test Mode:	UWB	Test Date:	1/26/2018
Test Engineer:	Andreas Davidsson	Measurement:	1.610 GHz to 1.990 GHz

Limit Calculation (1.610 GHz to 1.990 GHz):


$$E(\text{dBuV/m}) = 95.2 + \text{EIRP(dBm)}$$

Distance = 3 M

$$E(\text{dBuV/m}) = 95.2 + (-63.3)$$

$$E(\text{dBuV/m}) = 31.9$$

FCC 15.519 (c) 1610-1990MHz Radiated Scan 3m PK AVG

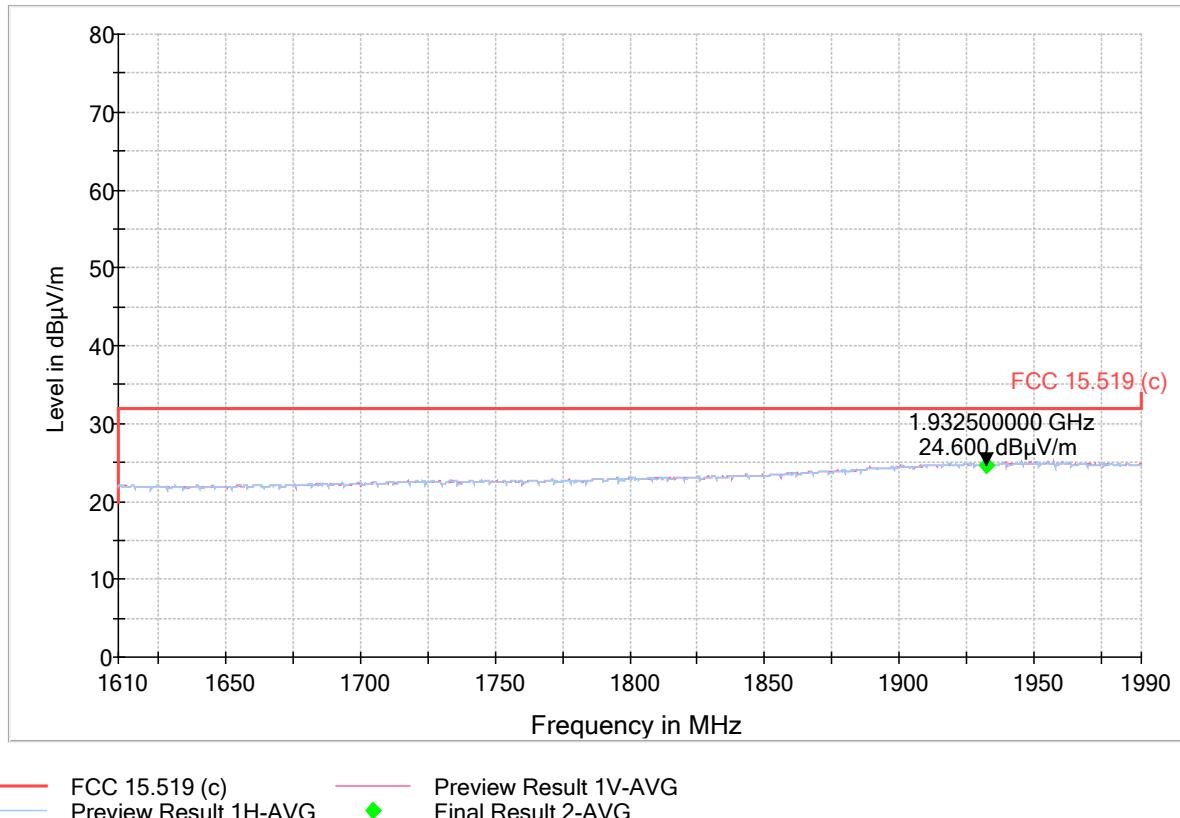

— FCC 15.519 (c)
 — Preview Result 1H-AVG

— Preview Result 1V-AVG
 — Final Result 2-AVG



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions

EUT:	UWB SENSOR	Model Name:	MOD10003
Test Mode:	UWB	Test Date:	1/26/2018
Test Engineer:	Andreas Davidsson	Measurement:	1.990 GHz to 3.100 GHz

Limit Calculation (1.990 GHz to 3.100 GHz):


$$E(\text{dBuV/m}) = 95.2 + \text{EIRP}(\text{dBm})$$

Distance = 3 M

$$E(\text{dBuV/m}) = 95.2 + (-61.3)$$

$$E(\text{dBuV/m}) = 33.9$$

FCC 15.519 (c) 1990-3100MHz Radiated Scan 3m PK AVG

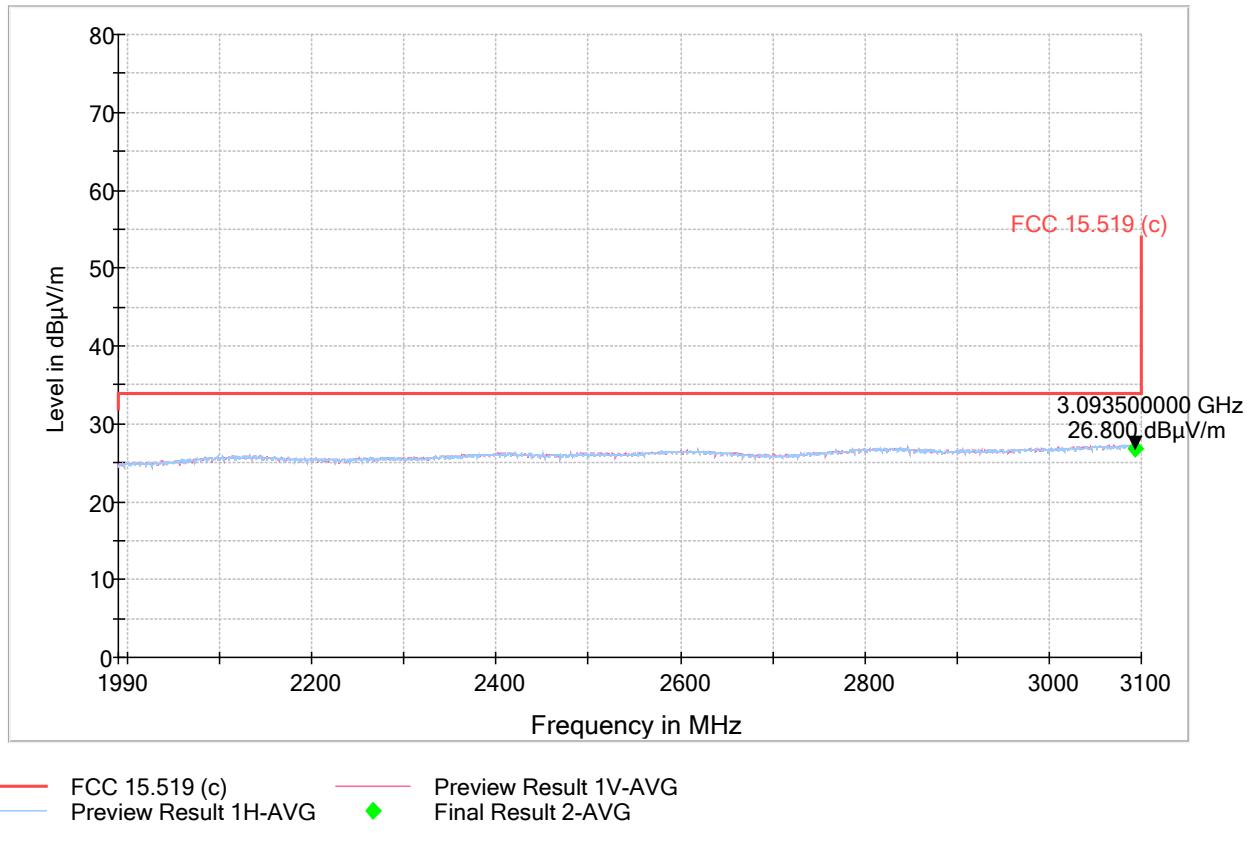

— FCC 15.519 (c)
 — Preview Result 1H-AVG ♦ Preview Result 1V-AVG
 — Preview Result 1H-AVG ♦ Final Result 2-AVG

EMT**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions

EUT:	UWB SENSOR	Model Name:	MOD10003
Test Mode:	UWB	Test Date:	1/26/2018
Test Engineer:	Andreas Davidsson	Measurement:	3.100 GHz to 10.6 GHz

Limit Calculation (3.100 GHz to 10.6 GHz):


$$E(\text{dBuV/m}) = 95.2 + \text{EIRP}(\text{dBm})$$

Distance = 3 M

$$E(\text{dBuV/m}) = 95.2 + (-41.3)$$

$$E(\text{dBuV/m}) = 53.9$$

FCC 15.519 (c) 3100-10600MHz Radiated Scan 3m PK AVG

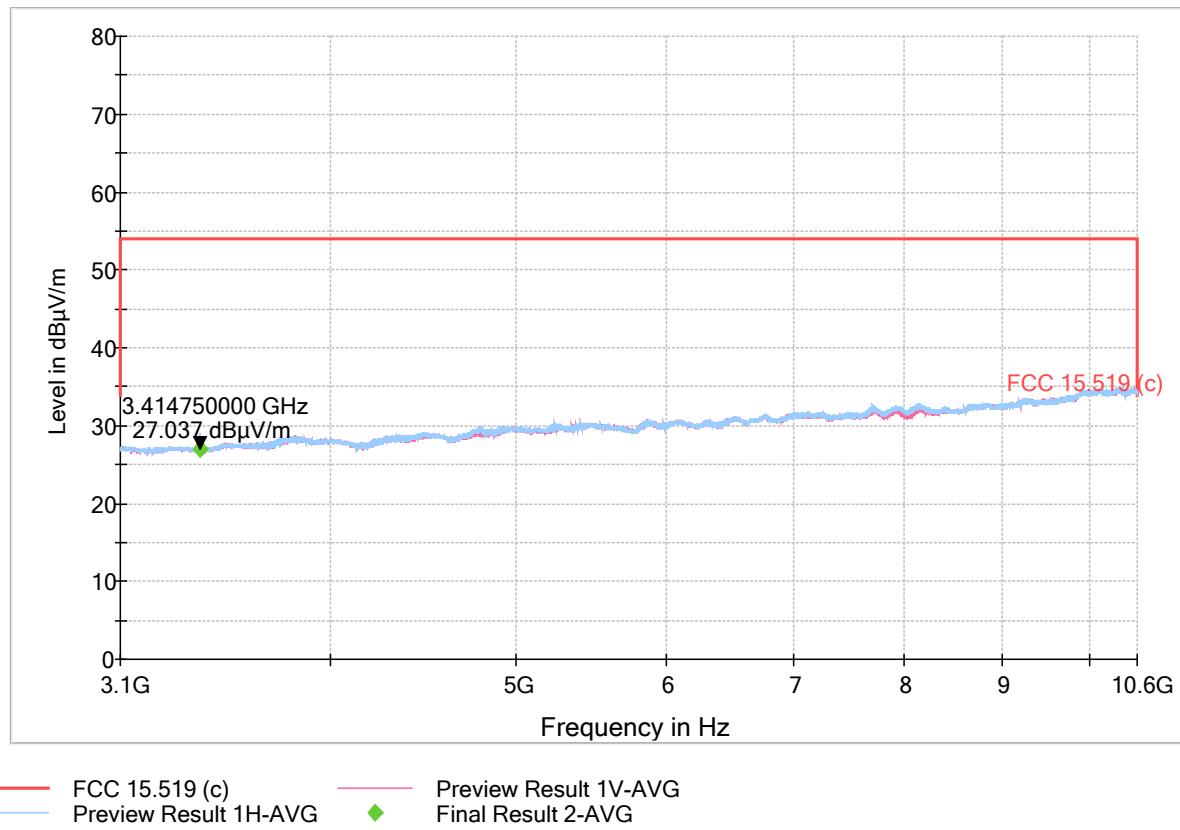



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions

EUT:	UWB SENSOR	Model Name:	MOD10003
Test Mode:	UWB	Test Date:	9/12/2018
Test Engineer:	Andreas Davidsson	Measurement:	10.6 GHz to 18 GHz

Limit Calculation (10.6 GHz to 18 GHz):


$$E(\text{dBuV/m}) = 95.2 + \text{EIRP}(\text{dBm})$$

Distance = 3 M

$$E(\text{dBuV/m}) = 95.2 + (-61.3)$$

$$E(\text{dBuV/m}) = 33.9$$

FCC 15.519 (c) 10600-18000MHz Radiated Scan 3m PK AVG

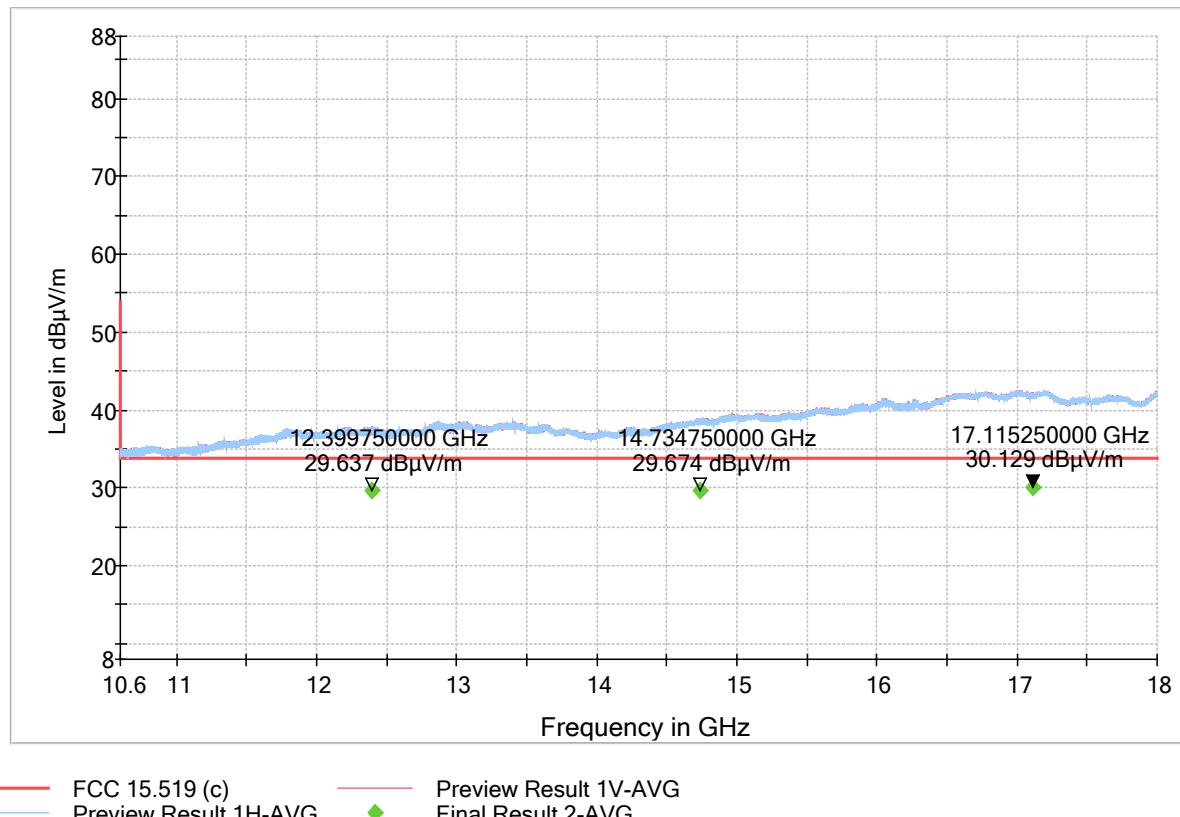

— FCC 15.519 (c)
 Preview Result 1V-AVG
 Preview Result 1H-AVG

— Preview Result 1V-AVG
 Final Result 2-AVG



ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions

EUT:	UWB SENSOR	Model Name:	MOD10003
Test Mode:	UWB	Test Date:	9/12/2018
Test Engineer:	Andreas Davidsson	Measurement:	18 GHz to 26.5 GHz

Limit Calculation (10.6 GHz to 18 GHz):


$$E(\text{dBuV/m}) = 95.2 + \text{EIRP}(\text{dBm})$$

Distance = 3 M

$$E(\text{dBuV/m}) = 95.2 + (-61.3)$$

$$E(\text{dBuV/m}) = 33.9$$

Floor Noise Check FCC Class B Radiated 18GHz-26.5GHz 3m PK AVG

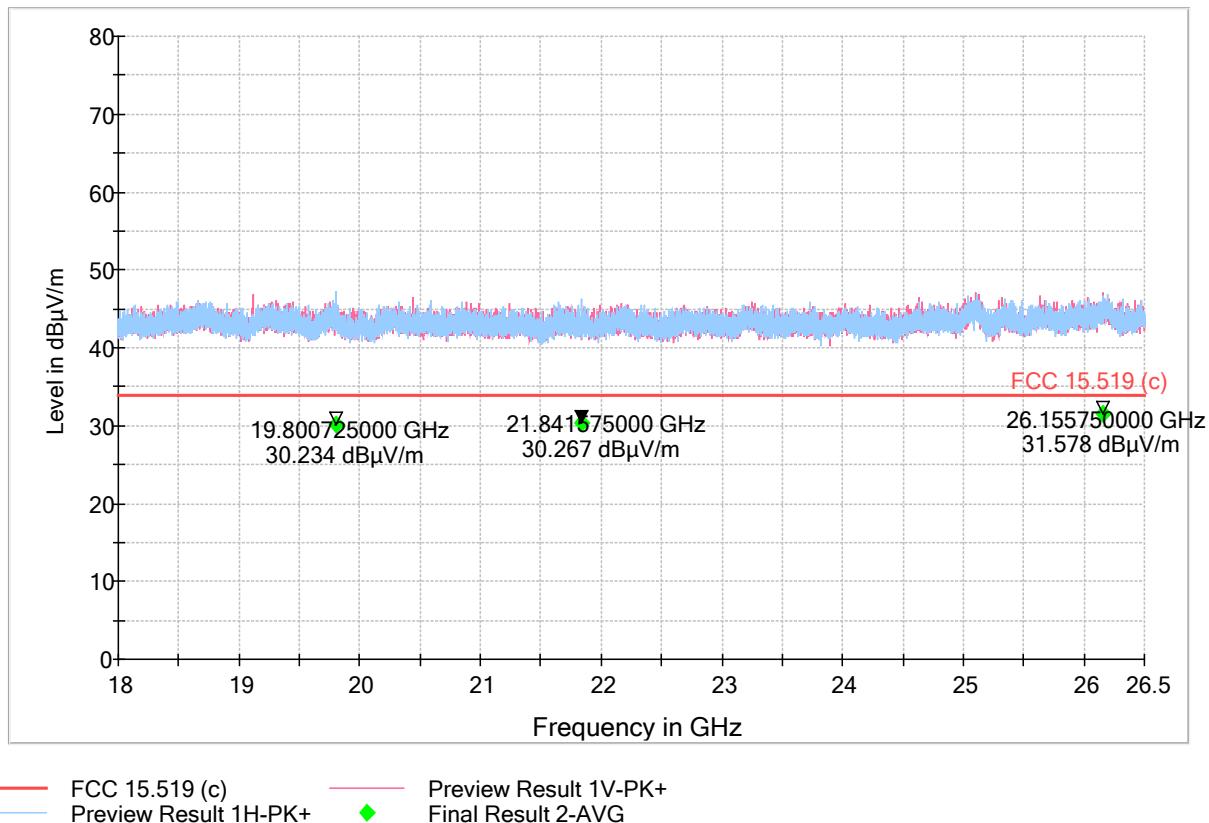

EMT**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions

EUT:	UWB SENSOR	Model Name:	MOD10003
Test Mode:	UWB	Test Date:	9/12/2018
Test Engineer:	Andreas Davidsson	Measurement:	26.5 GHz to 40 GHz

Limit Calculation (10.6 GHz to 18 GHz):


$$E(\text{dBuV/m}) = 95.2 + \text{EIRP}(\text{dBm})$$

Distance = 3 M

$$E(\text{dBuV/m}) = 95.2 + (-61.3)$$

$$E(\text{dBuV/m}) = 33.9$$

Floor Noise Check FCC Class B Radiated 26.5GHz-40GHz 3m PK AVG

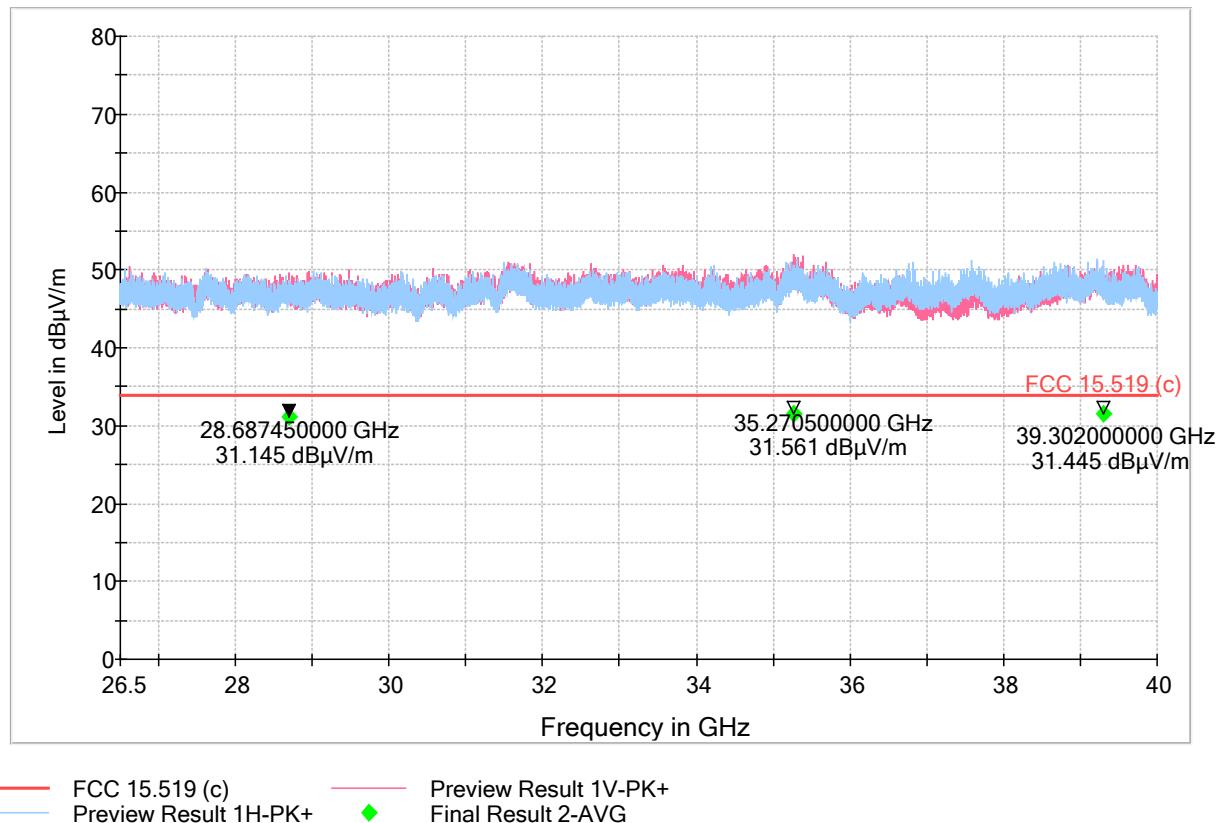

— FCC 15.519 (c)
 — Preview Result 1V-PK+
 — Preview Result 1H-PK+
 ◆ Final Result 2-AVG

**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions in GPS Bands

EUT:	UWB SENSOR	Model Name:	MOD10003
Test Mode:	UWB	Test Date:	8/31/2018
Test Engineer:	Andreas Davidsson	Measurement:	1164MHz to 1240 MHz and 1559 MHz to 1610 MHz

Limit Calculation (1164-1240 MHz and 1559-1610 MHz):

$$E(\text{dBuV/m}) = 95.2 + \text{EIRP(dBm)}$$

Distance = 3 M

$$E(\text{dBuV/m}) = 95.2 + (-85.3)$$

$$E(\text{dBuV/m}) = 9.9$$


EMT**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions in GPS Bands

EUT:	UWB SENSOR	Model Name:	MOD10003
Test Mode:	UWB	Test Date:	8/31/2018
Test Engineer:	Andreas Davidsson	Measurement:	1164MHz to 1240 MHz and 1559 MHz to 1610 MHz

FCC 15.519 (d) Lower Band Radiated Scan 3m PK AVG

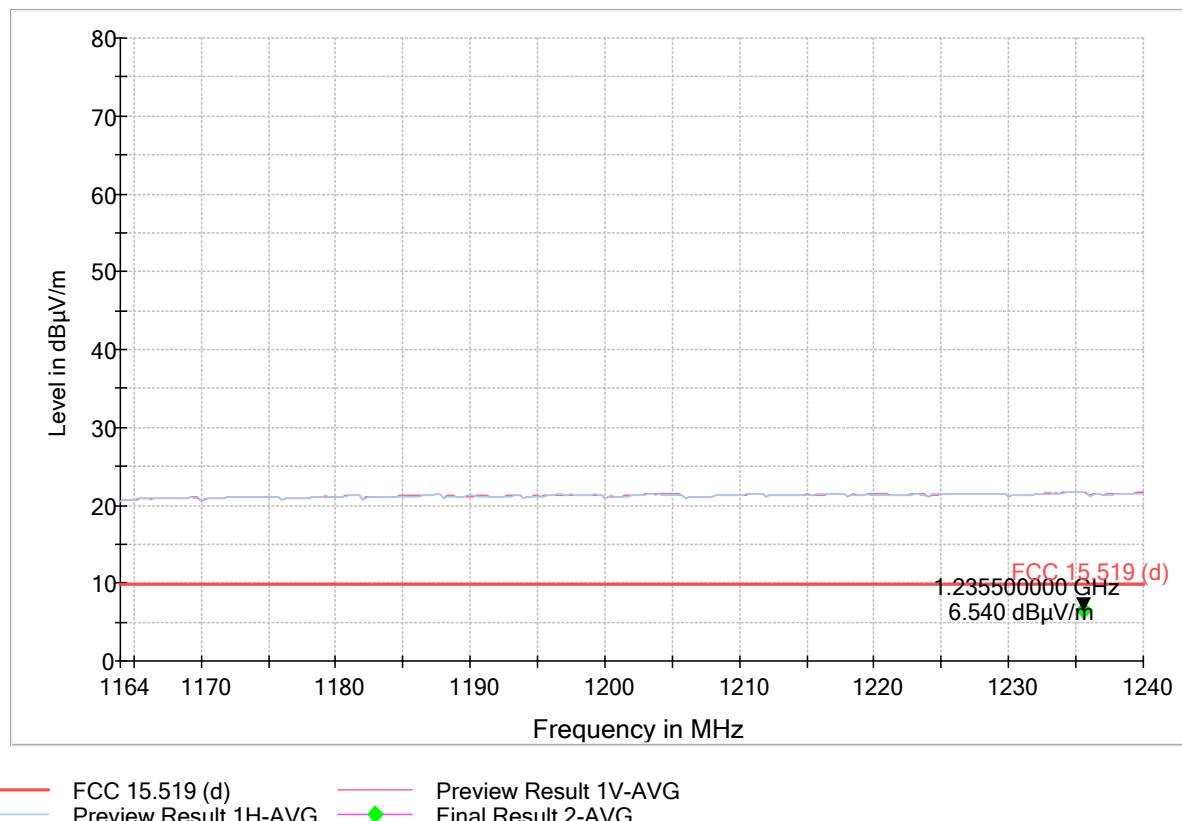**1164-1240 MHz, Antenna Polarization**


EMT**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Radiated Emissions in GPS Bands

EUT:	UWB SENSOR	Model Name:	MOD10003
Test Mode:	UWB	Test Date:	8/31/2018
Test Engineer:	Andreas Davidsson	Measurement:	1164MHz to 1240 MHz and 1559 MHz to 1610 MHz

FCC 15.519 (d) Higher Band Radiated Scan 3m PK AVG

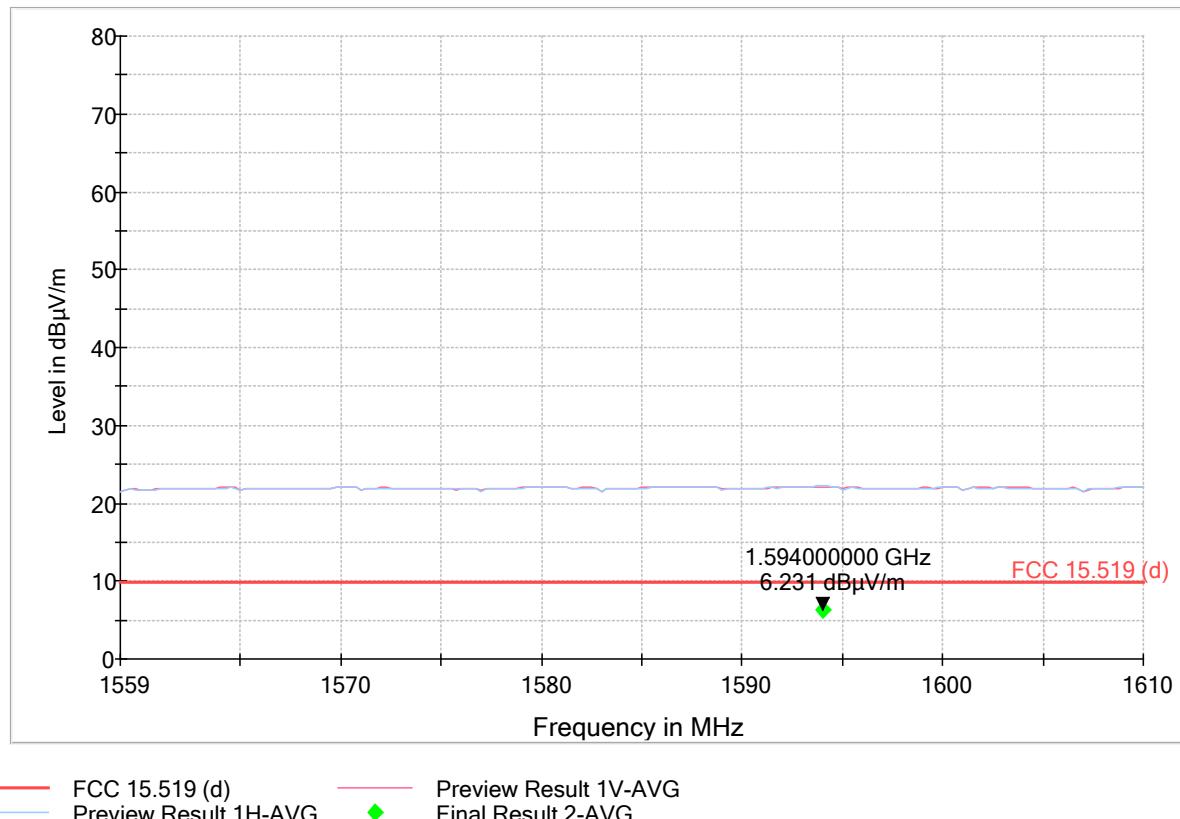**1559-1610 MHz, Antenna Polarization**

EMT**ELECTRO MAGNETIC TEST, INC.**

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Peak Emissions within a 50 MHz Bandwidths

EUT:	UWB SENSOR	Model Name:	MOD10003
Test Mode:	UWB	Test Date:	1/26/2018
Test Engineer:	Andreas Davidsson	Measurement:	Fundamental


Limit Calculation (Peak Emissions within a 50 MHz Bandwidths):

$$E(\text{dBuV/m}) = 95.2 + 20\log(\text{RBW}/50)$$

$$\text{RBW} = 10 \text{ MHz}$$

$$E(\text{dBuV/m}) = 95.2 + 20\log(10/50)$$

$$E(\text{dBuV/m}) = 81.2$$

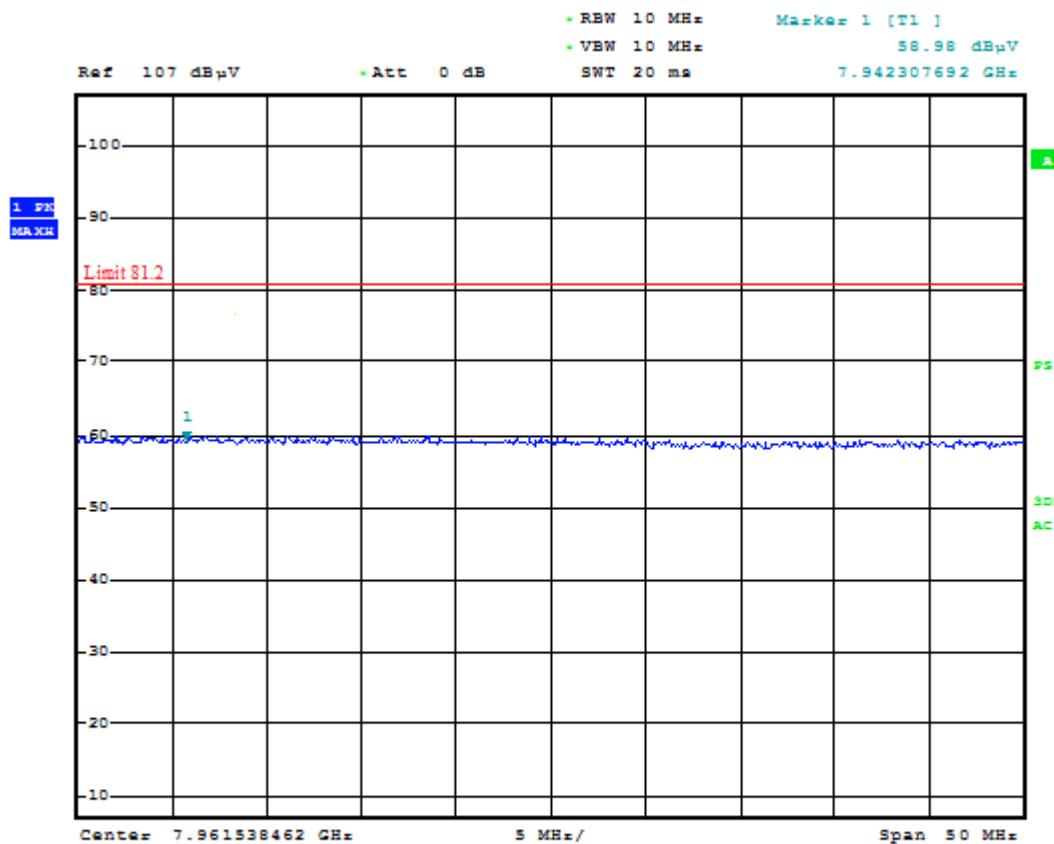

Date: 26.JAN.2018 23:21:56


EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Bandwidth Test

Company:	S1 Corporation	Test Date:	1/26/2018
EUT Name:	UWB SENSOR	Test Engineer:	Andreas Davidsson
Model:	MOD10003	Test Result:	PASS
Operating Mode:	TX Mode		

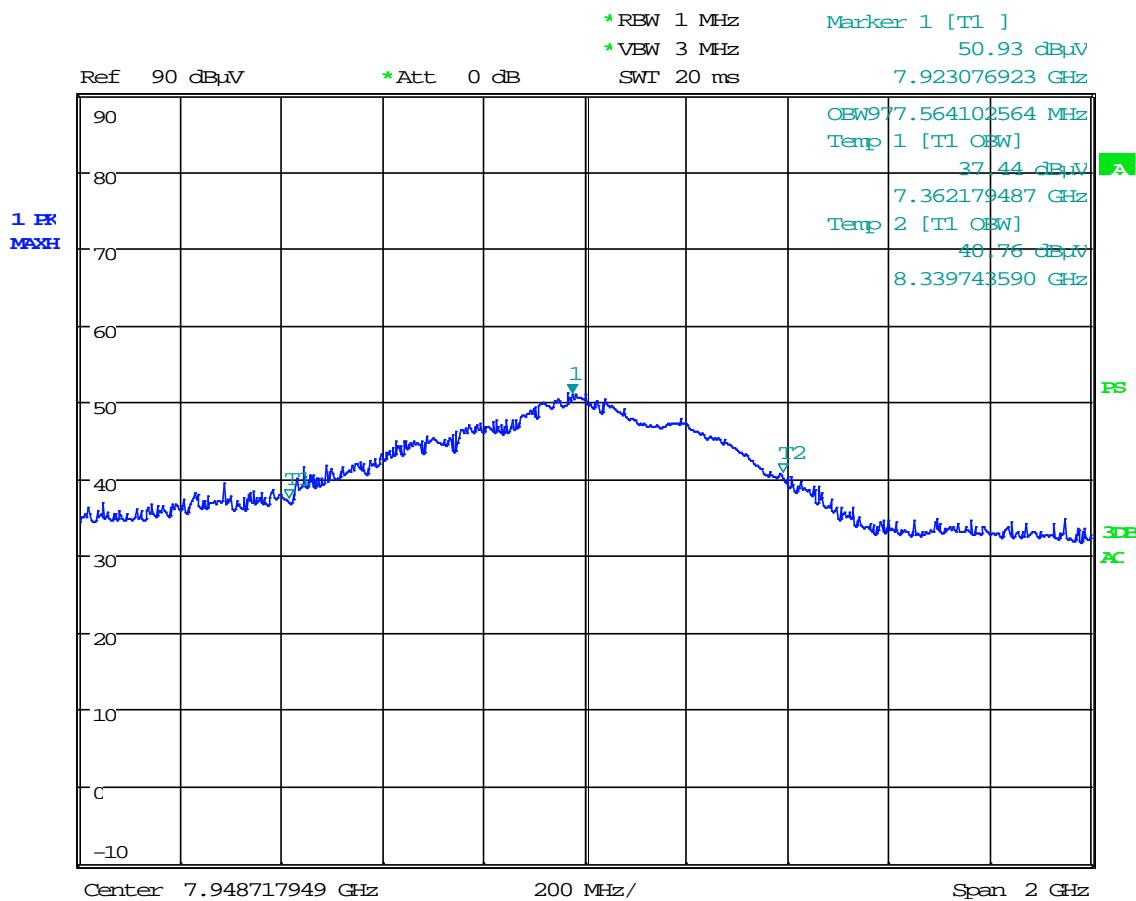

Date: 2.FEB.2018 19:57:06

Limit:	Test Result:	Conclusion:
10 dB bandwidth contained between 3100 to 10600 MHz	10 dB bandwidth contained between 7362.179 MHz and 8339.743 MHz	PASS
10 dB bandwidth \geq 500 MHz	977.56 MHz	PASS


EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

Transmission Test

Company:	S1 Corporation	Test Date:	8/13/2018
EUT Name:	UWB SENSOR	Test Engineer:	Andreas Davidsson
Model:	MOD10003	Test Result:	PASS

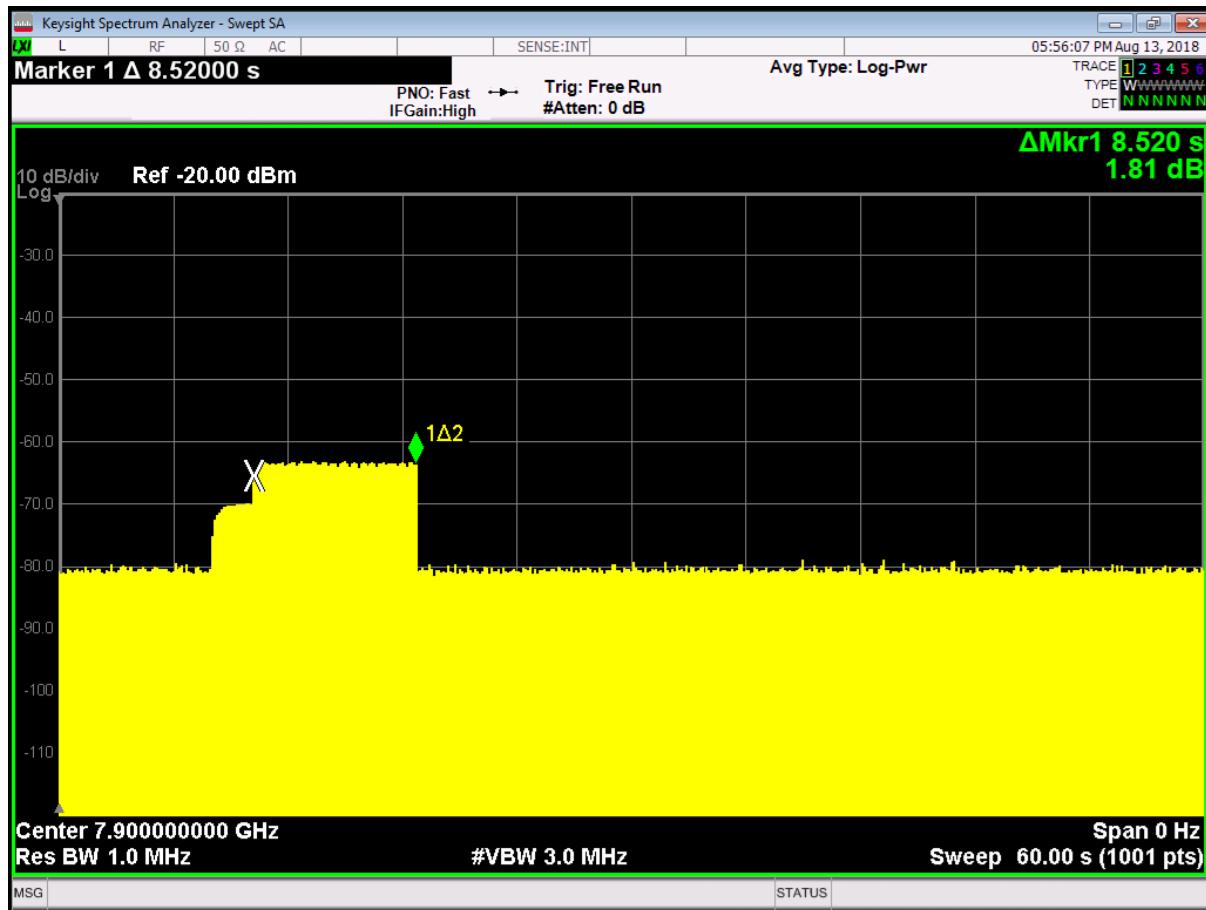

Limit:	Test Result:	Conclusion:
An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.	EUT stops transmission if it does not receive an acknowledgement within 10 seconds.	PASS


EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

AC Line Conducted Emissions Test Data

EUT:	UWB SENSOR	Model Name:	MOD10003
Test Mode:	UWB	Test Date:	9/12/2018
Test Engineer:	Andreas Davidsson	Measurement:	Line

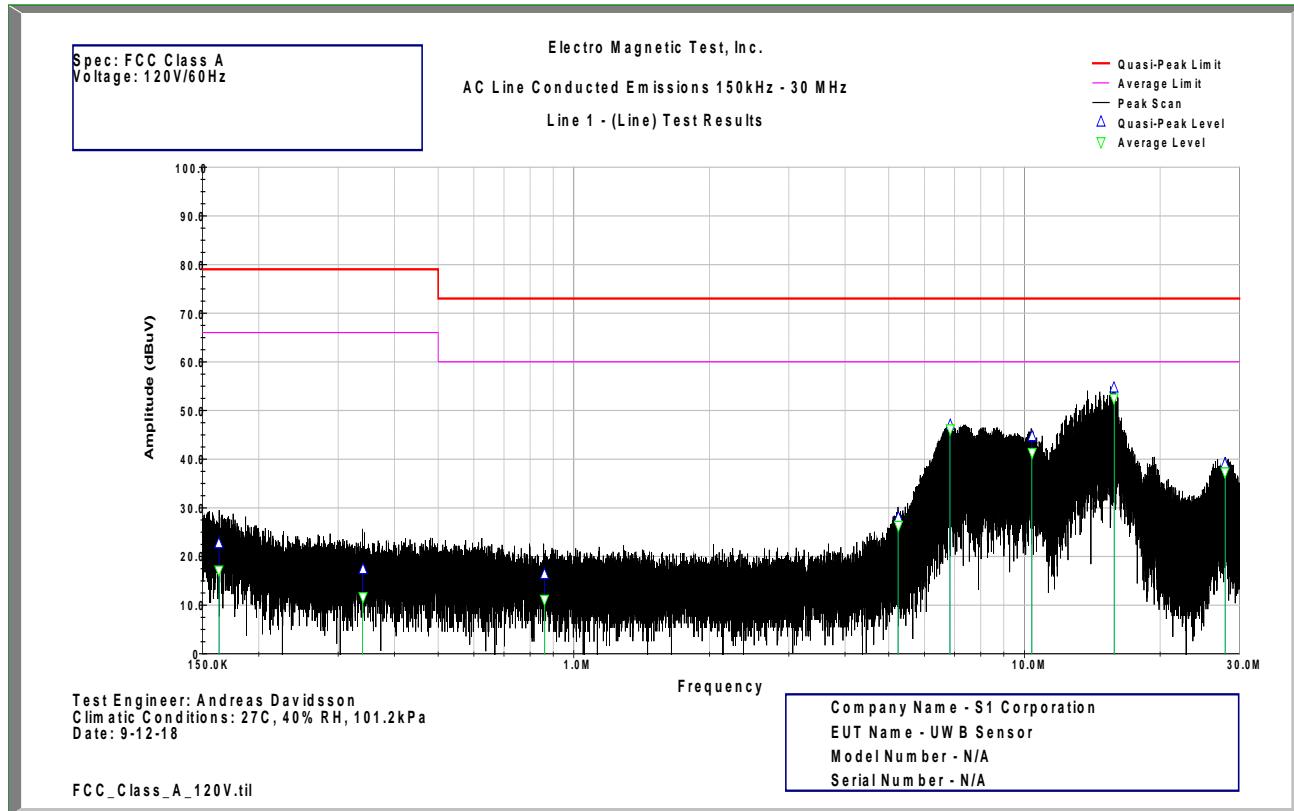**Line 1 - (Line) Test Results**

Frequency (MHz)	Peak (dBuV)	Quasi-Peak (dBuV)	Average (dBuV)	Corr. Factor (dB)	Quasi-Peak Limit	QP Margin	Average Limit	Average Margin
0.163	28.847	22.693	17.193	11.230	79.000	-56.307	66.000	-48.807
0.340	21.447	17.278	11.626	10.610	79.000	-61.722	66.000	-54.374
0.862	20.216	16.298	11.061	10.384	73.000	-56.702	60.000	-48.939
5.243	29.688	27.899	26.279	10.846	73.000	-45.101	60.000	-33.721
6.834	47.843	46.902	46.227	10.986	73.000	-26.098	60.000	-13.773
10.386	46.419	44.704	41.364	10.975	73.000	-28.296	60.000	-18.636
15.821	55.825	54.630	52.521	11.145	73.000	-18.370	60.000	-7.479
27.892	40.546	39.041	37.289	11.536	73.000	-33.959	60.000	-22.711


EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

AC Line Conducted Emissions Test Data

EUT:	UWB SENSOR	Model Name:	MOD10003
Test Mode:	UWB	Test Date:	9/12/2018
Test Engineer:	Andreas Davidsson	Measurement:	Neutral

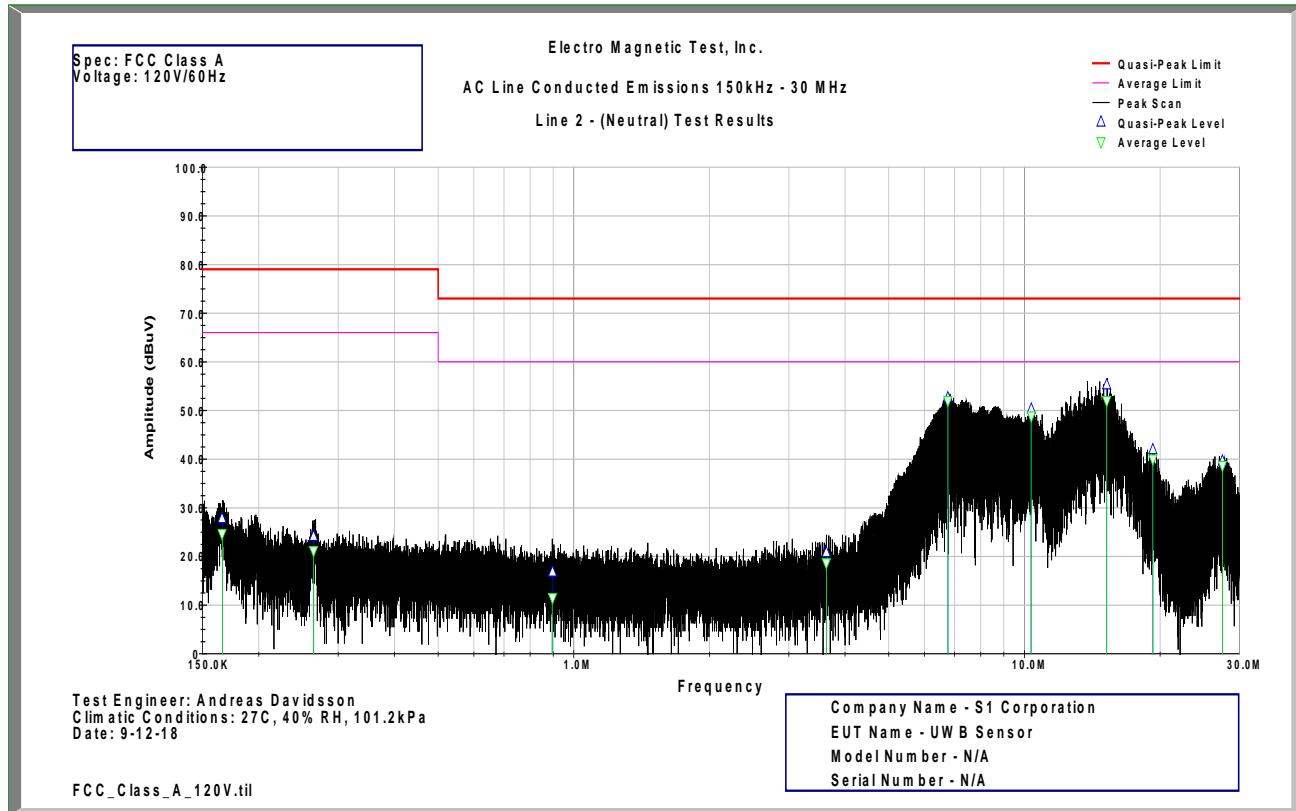

Line 2 - (Neutral) Test Results

Frequency (MHz)	Peak (dBuV)	Quasi-Peak (dBuV)	Average (dBuV)	Corr. Factor (dB)	Quasi-Peak Limit	QP Margin	Average Limit	Average Margin
0.166	30.772	27.871	24.630	11.174	79.000	-51.129	66.000	-41.370
0.265	26.931	24.129	21.111	10.643	79.000	-54.871	66.000	-44.889
0.896	20.556	16.853	11.490	10.380	73.000	-56.147	60.000	-48.510
3.636	23.366	20.837	18.659	10.606	73.000	-52.163	60.000	-41.341
6.766	53.502	52.729	51.968	10.974	73.000	-20.271	60.000	-8.032
10.349	51.403	50.341	48.804	10.964	73.000	-22.659	60.000	-11.196
15.223	57.237	55.312	51.933	11.121	73.000	-17.688	60.000	-8.067
19.271	43.438	42.017	39.898	11.289	73.000	-30.983	60.000	-20.102
27.521	41.019	39.719	38.673	11.483	73.000	-33.281	60.000	-21.327

EMT

ELECTRO MAGNETIC TEST, INC.


1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

APPENDIX B

TEST SETUP DIAGRAMS

EMT**ELECTRO MAGNETIC TEST, INC.**


1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

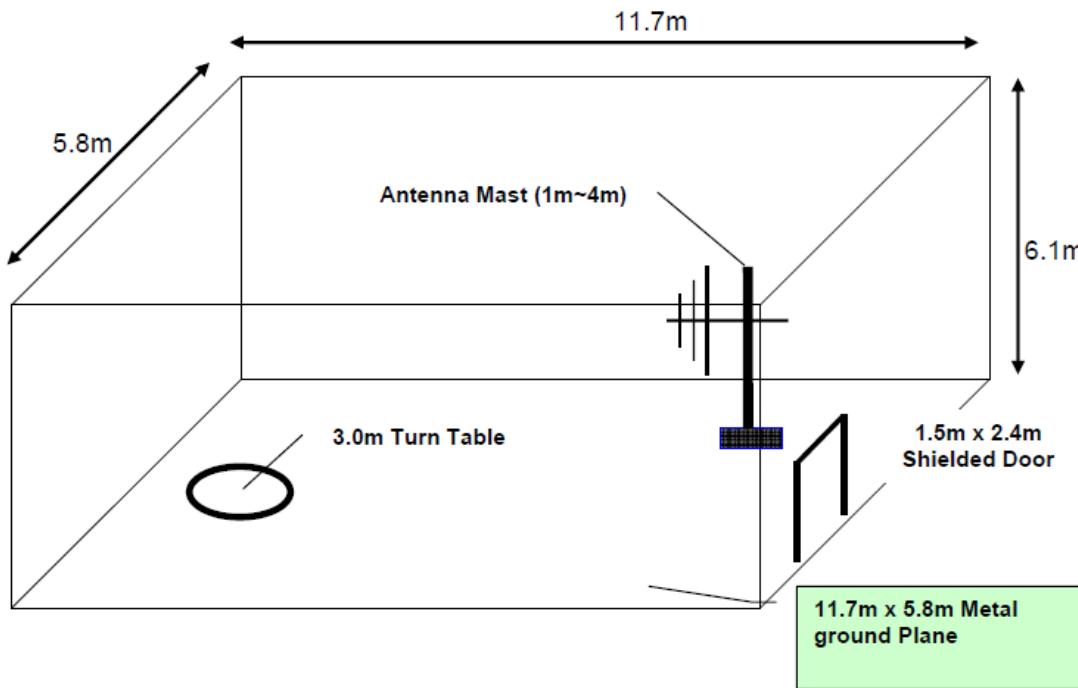**FIGURE 1 - LAYOUT OF 5 METER SEMI-ANECHOIC CHAMBER**

EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

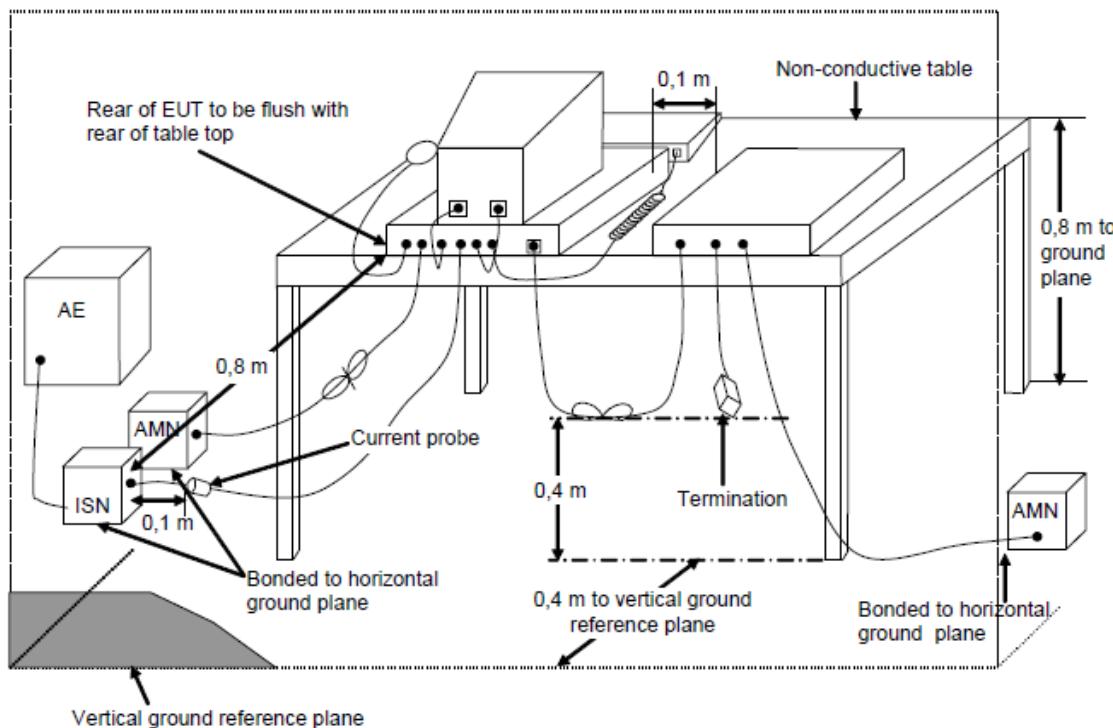**FIGURE 2 – TABLETOP CONDUCTED EMISSIONS TEST SETUP – SITE “D”**

EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

APPENDIX C

MODIFICATIONS TO THE EUT



ELECTRO MAGNETIC TEST, INC.
1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

MODIFICATIONS TO THE EUT

No modifications were made to the EUT by Electro Magnetic Test, Inc. personnel during the testing.

EMT

ELECTRO MAGNETIC TEST, INC.

1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

APPENDIX D

ADDITIONAL MODELS COVERED UNDER THIS REPORT



ELECTRO MAGNETIC TEST, INC.
1547 Plymouth Street, Mountain View, CA 94043 Tel: (650) 965-4000 Fax: (650) 965-3000

ADDITIONAL MODELS COVERED UNDER THIS REPORT

There are no additional models to be covered under this report.