

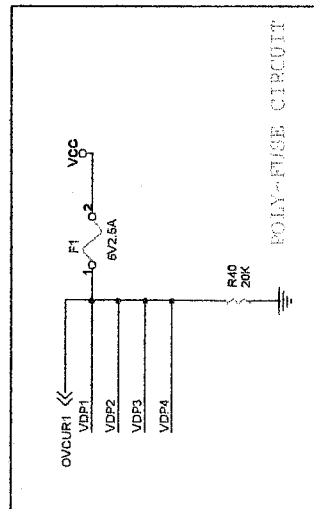
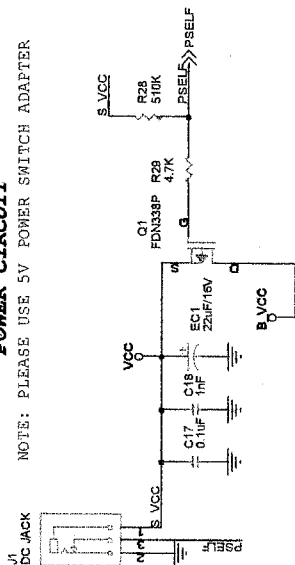
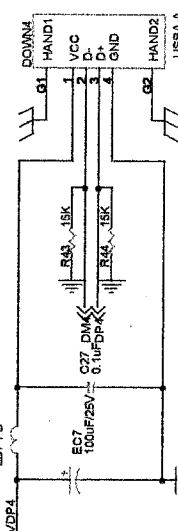
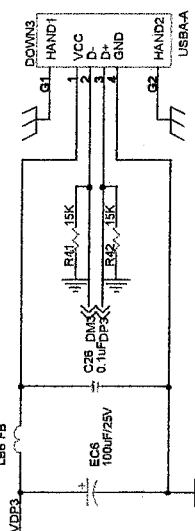
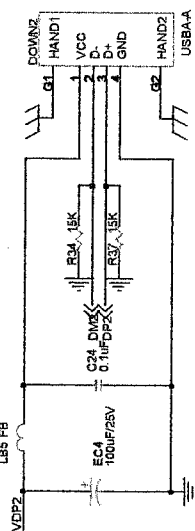
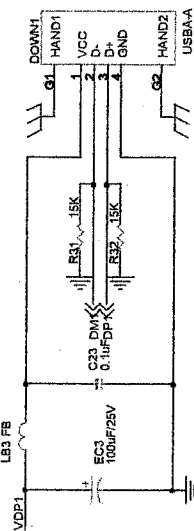
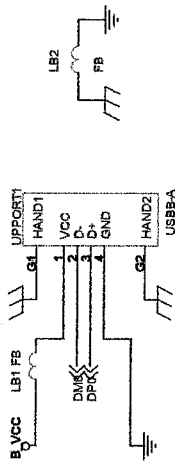



POWER CIRCUIT

NOTE: PLEASE USE 5V POWER SWITCH ADAPTER

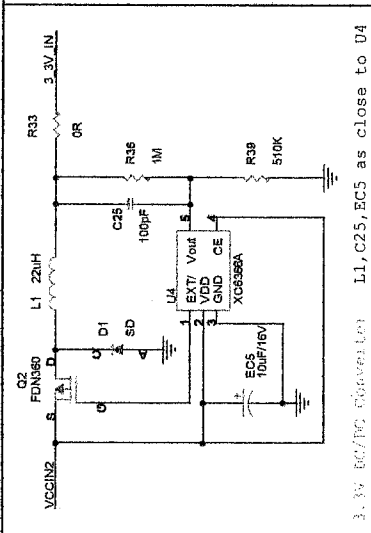

NOTE: PLEASE USE
3.3V Regulator or
3.3V DC / DC
Converter

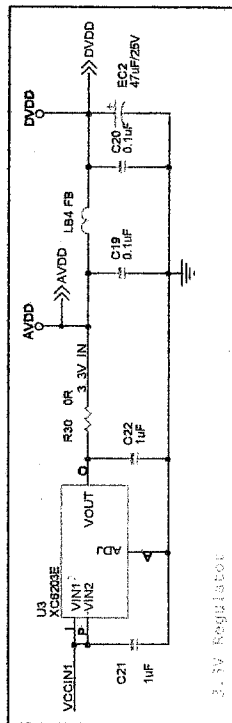

GENESYS LOGIC, INC.









GL850A / GL852 Power
USB2.0 4-Port Hub Controller


Rev	Size	Document Number	Date
3.1	B	USB2.0 4-Port Hub Controller	Wednesday, October 12, 2005

17 FEB 2006

No 4 4 5 2

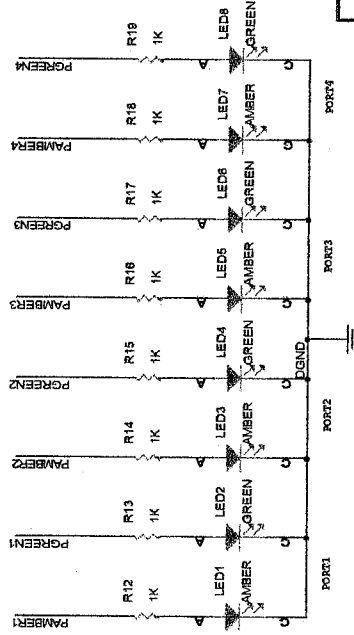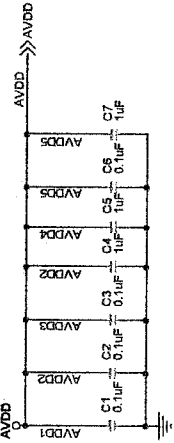

EEPROM FOR EXTERNAL ID STORING



NOTE: PLEASE MAKE SURE THE SEEPROM CAN WORK AT 3.3 V

GENESYS LOGIC, INC.

GL850A / GL852 Chip & EX CPU
USB2.0 4-Port Hub Controller

Size	Document Number	Rev
B	GL850A / GL852	3.1
Date	Wednesday, October 12, 2005	Sheet 2 of 3

17 FEB 2006
No 4 4 5 5 2