



# FCC RADIO EXPOSURE TEST REPORT

**FCC ID** : Q87-03459

**Equipment** : LINKSYS MAX-STREAM AC1900 MU-MIMO  
GIGABIT ROUTER, LINKSYS MAX-STREAM  
AC1750 MU-MIMO GIGABIT ROUTER

**Brand Name** : LINKSYS

**Model Name** : EA7500 V3, EA7430, EA7250, EA7500S


**Applicant** : Linksys LLC  
121 Theory Drive, Irvine, CA 92617, USA

**Standard** : 47 CFR Part 2.1091

The product was received on Jun. 17, 2019, and testing was started from Jul. 08, 2019 and completed on Sep. 04, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

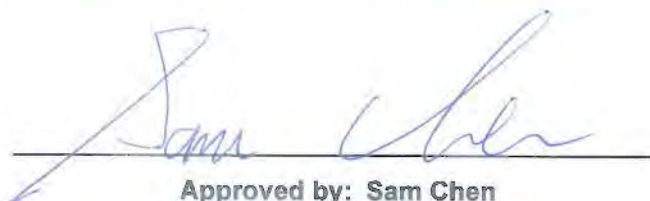

Approved by: Sam Chen

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## **Table of Contents**

|                                                 |          |
|-------------------------------------------------|----------|
| <b>History of this test report.....</b>         | <b>3</b> |
| <b>Summary of Test Result.....</b>              | <b>4</b> |
| <b>1 General Description .....</b>              | <b>5</b> |
| 1.1 EUT General Information .....               | 5        |
| 1.2 Table for Multiple Listing .....            | 5        |
| 1.3 Testing Location .....                      | 5        |
| <b>2 Maximum Permissible Exposure .....</b>     | <b>6</b> |
| 2.1 Limit of Maximum Permissible Exposure ..... | 6        |
| 2.2 MPE Calculation Method.....                 | 6        |
| 2.3 Calculated Result and Limit.....            | 7        |

### **Photographs of EUT v01**



TEL : 886-3-656-9065  
FAX : 886-3-656-9085  
Report Template No.: CB Ver1.0



## Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items          | Result (PASS/FAIL) | Remark |
|---------------|-----------------|---------------------|--------------------|--------|
| 2             | -               | Exposure evaluation | PASS               | -      |

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Sam Chen**

**Report Producer: Viola Huang**



# 1 General Description

## 1.1 EUT General Information

| RF General Information |                        |                           |                                                                                                 |
|------------------------|------------------------|---------------------------|-------------------------------------------------------------------------------------------------|
| Evaluation Mode        | Frequency Range (MHz)  | Operating Frequency (MHz) | Modulation Type                                                                                 |
| 2.4GHz WLAN            | 2400-2483.5            | 2412-2462                 | 802.11b: DSSS (DBPSK, DQPSK, CCK)<br>802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)                 |
| 5GHz WLAN              | 5150-5250<br>5725-5850 | 5180-5240<br>5745-5825    | 802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)<br>802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) |

## 1.2 Table for Multiple Listing

| Equipment Name                                   | Model Name | Description                                                                                                                |
|--------------------------------------------------|------------|----------------------------------------------------------------------------------------------------------------------------|
| LINKSYS MAX-STREAM AC1900 MU-MIMO GIGABIT ROUTER | EA7500 V3  | All the equipment names/model names are identical, the different equipment names/model names served as marketing strategy. |
|                                                  | EA7430     |                                                                                                                            |
|                                                  | EA7500S    |                                                                                                                            |
| LINKSYS MAX-STREAM AC1750 MU-MIMO GIGABIT ROUTER | EA7250     |                                                                                                                            |

From the above list, equipment name: LINKSYS MAX-STREAM AC1900 MU-MIMO GIGABIT ROUTER and model name: EA7500 V3 was selected as representative model for the test and its data was recorded in this report.

## 1.3 Testing Location

| Testing Location                    |        |                                                                                                                               |
|-------------------------------------|--------|-------------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/>            | HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL : 886-3-327-3456 FAX : 886-3-327-0973   |
| <input checked="" type="checkbox"/> | JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.<br>TEL : 886-3-656-9065 FAX : 886-3-656-9085 |

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.

## 2 Maximum Permissible Exposure

### 2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|------------------------------------------|------------------------------------------------------------------|
| 0.3-3.0               | 614                               | 1.63                              | (100)*                                   | 6                                                                |
| 3.0-30                | 1842 / f                          | 4.89 / f                          | (900 / f)*                               | 6                                                                |
| 30-300                | 61.4                              | 0.163                             | 1.0                                      | 6                                                                |
| 300-1500              |                                   |                                   | F/300                                    | 6                                                                |
| 1500-100,000          |                                   |                                   | 5                                        | 6                                                                |

(B) Limits for General Population / Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|------------------------------------------|------------------------------------------------------------------|
| 0.3-1.34              | 614                               | 1.63                              | (100)*                                   | 30                                                               |
| 1.34-30               | 824/f                             | 2.19/f                            | (180/f)*                                 | 30                                                               |
| 30-300                | 27.5                              | 0.073                             | 0.2                                      | 30                                                               |
| 300-1500              |                                   |                                   | F/1500                                   | 30                                                               |
| 1500-100,000          |                                   |                                   | 1.0                                      | 30                                                               |

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

### 2.2 MPE Calculation Method

The MPE was calculated at 24 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



## 2.3 Calculated Result and Limit

### Exposure Environment: General Population / Uncontrolled Exposure

| Mode     | DG (dBi) | Power (dBm) | EIRP (dBm) | Tolerance (dB) | Tune-up EIRP (dBm) | Tune-up EIRP (W) | Distance (cm) | S (mW/cm <sup>2</sup> ) | S Limit (mW/cm <sup>2</sup> ) |
|----------|----------|-------------|------------|----------------|--------------------|------------------|---------------|-------------------------|-------------------------------|
| 2.4G;D1D | 7.72     | 26.54       | 34.26      | 0.50           | 34.76              | 2.99226          | 24            | 0.41339                 | 1.00000                       |
| 5.2G;D1D | 7.86     | 25.32       | 33.18      | 0.50           | 33.68              | 2.33346          | 24            | 0.32238                 | 1.00000                       |
| 5.8G;D1D | 7.67     | 28.23       | 35.90      | 0.09           | 35.99              | 3.97192          | 24            | 0.54874                 | 1.00000                       |

### Simultaneous Transmission Analysis Mode: WLAN 2.4GHz + WLAN 5GHz

| Mode     | DG (dBi) | Power (dBm) | EIRP (dBm) | Tolerance (dB) | Tune-up EIRP (dBm) | Tune-up EIRP (W) | Distance (cm) | S (mW/cm <sup>2</sup> ) | S Limit (mW/cm <sup>2</sup> ) | Ratio (S/Limit) |
|----------|----------|-------------|------------|----------------|--------------------|------------------|---------------|-------------------------|-------------------------------|-----------------|
| 2.4G;D1D | 7.72     | 26.54       | 34.26      | 0.50           | 34.76              | 2.99226          | 24            | 0.41339                 | 1.00000                       | 0.41339         |
| 5.8G;D1D | 7.67     | 28.23       | 35.90      | 0.09           | 35.99              | 3.97192          | 24            | 0.54873                 | 1.00000                       | 0.54873         |
|          |          |             |            |                |                    |                  |               |                         | Sum Ratio                     | 0.96212         |
|          |          |             |            |                |                    |                  |               |                         | Ratio Limit                   | 1               |

Note: The above antenna gain was declared by manufacturer.

————THE END————