



FCC RADIO TEST REPORT

Applicant's company	Linksys LLC
Applicant Address	121 Theory Drive, Irvine, CA 92617, USA
FCC ID	Q87-EA6100
Manufacturer's company	Wistron NeWeb Corporation
Manufacturer Address	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308 Taiwan

Product Name	Linksys EA6100 Wireless-AC Router
Brand Name	LINKSYS
Model No.	EA6100
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Received Date	Dec. 24, 2013
Final Test Date	Apr. 14, 2016
Submission Type	Class II Change

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01r02, KDB662911 D01 v02r01, KDB644545 D03 v01**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes.....	7
3.6. Table for Testing Locations.....	9
3.7. Table for Class II Change	9
3.8. Table for Supporting Units	10
3.9. Table for Parameters of Test Software Setting	10
3.10. EUT Operation during Test	11
3.11. Duty Cycle.....	11
3.12. Test Configurations	12
4. TEST RESULT	15
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	19
4.3. 6dB Spectrum Bandwidth Measurement	30
4.4. Maximum Conducted Output Power Measurement.....	34
4.5. Power Spectral Density Measurement	37
4.6. Radiated Emissions Measurement	46
4.7. Band Edge Emissions Measurement	70
4.8. Frequency Stability Measurement	78
4.9. Antenna Requirements	85
5. LIST OF MEASURING EQUIPMENTS	86
6. MEASUREMENT UNCERTAINTY.....	88
APPENDIX A. TEST PHOTOS	A1 ~ A4



History of This Test Report



Report No.: FR4N1172-36AB

Project No: CB10505018

1. VERIFICATION OF COMPLIANCE

Product Name : Linksys EA6100 Wireless-AC Router
Brand Name : LINKSYS
Model No. : EA6100
Applicant : Linksys LLC
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Dec. 24, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Cliff Chang
Cliff Chang
SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.48 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(e)	6dB Spectrum Bandwidth	Complies	-
4.4	15.407(a)	Maximum Conducted Output Power	Complies	0.21dB
4.5	15.407(a)	Power Spectral Density	Complies	0.60 dB
4.6	15.407(b)	Radiated Emissions	Complies	4.88 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.04 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5250 MHz / 5725 ~ 5850 MHz
Channel Number	9 for 20MHz bandwidth ; 4 for 40MHz bandwidth 2 for 80MHz bandwidth
Channel Band Width (99%)	Band 1: IEEE 802.11a: 19.02 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 18.67 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 38.35 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 75.25 MHz Band 4: IEEE 802.11a: 21.10 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 24.66 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 36.90 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 74.96 MHz
Maximum Conducted Output Power	Band 1: IEEE 802.11a: 29.76 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 29.74 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 29.41 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 13.33 dBm Band 4: IEEE 802.11a: 29.79 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 29.59 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 26.44 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 22.85 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input checked="" type="checkbox"/> With beamforming	<input type="checkbox"/> Without beamforming
Operate Condition	<input checked="" type="checkbox"/> Indoor	<input type="checkbox"/> Outdoor

Note: The product has beamforming function for 802.11a/n/ac in 5GHz band.

Antenna and Band width

Antenna	Two (Tx)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	2	MCS 0-15
802.11n (HT40)	2	MCS 0-15
802.11ac (VHT20)	2	MCS 0-9/Nss1-2
802.11ac (VHT40)	2	MCS 0-9/Nss1-2
802.11ac (VHT80)	2	MCS 0-9/Nss1-2

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model	Rating
Adapter	LEI	MU18A2120150-A1	Input: 100-240V~50/60Hz, 0.5A Output: 12V, 1.5A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)		
					2.4GHz	5GHz	
						(Band 1)	(Band 4)
1	CORTEC	AN2450-55A03BGX	Dipole Antenna	I-PEX	2.82	2.24	2.91
2	CORTEC	AN2450-55A03BGX	Dipole Antenna	I-PEX	2.49	2.35	2.91

Note: The EUT has two antennas

For 2.4GHz function:


For IEEE 802.11b/g/n mode (2TX/2RX)

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11a/n/ac mode (2TX/2RX)

Ant. 1 and Ant. 2 could transmit/receive simultaneously.

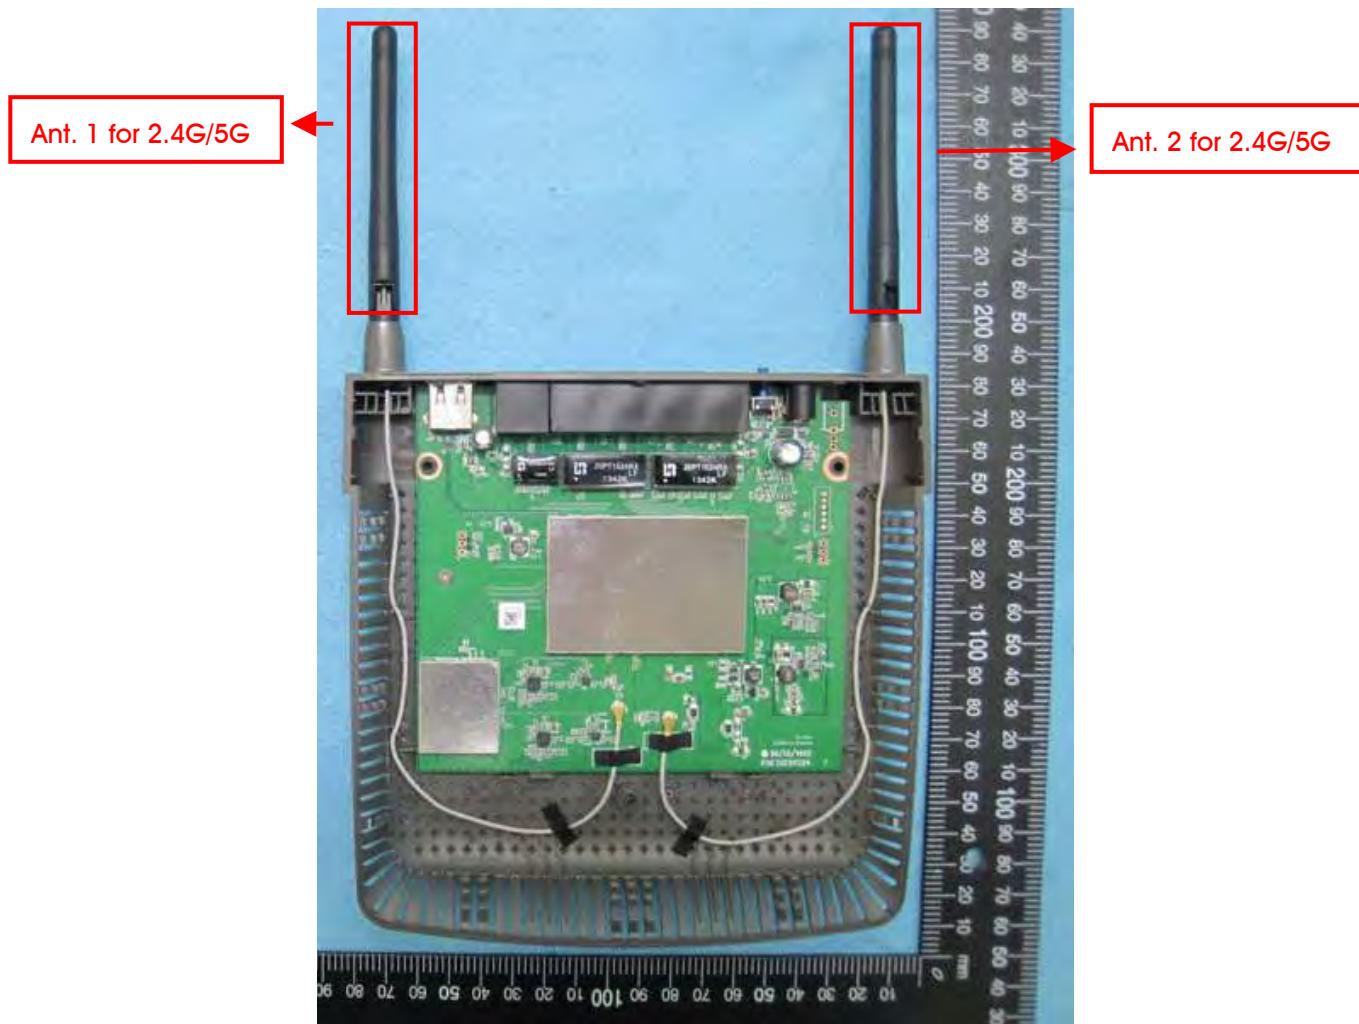

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 151, 159.

For 80MHz bandwidth systems, use Channel 42, 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Ant.
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2
Power Spectral Density	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2
6dB Spectrum Bandwidth Measurement	11a/BPSK	Band 4	6Mbps	149/157/165	1+2
	11ac VHT20	Band 4	MCS0/Nss1	149/157/165	1+2
	11ac VHT40	Band 4	MCS0/Nss1	151/159	1+2
	11ac VHT80	Band 4	MCS0/Nss1	155	1+2
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2

Band Edge Emission	11a/BPSK	Band 1&4	6Mbps	36/40/48/149/1 57/165	1+2
	11ac VHT20	Band 1&4	MCS0/Nss1	36/40/48/149/1 57/165	1+2
	11ac VHT40	Band 1&4	MCS0/Nss1	38/46/151/159	1+2
	11ac VHT80	Band 1&4	MCS0/Nss1	42/155	1+2
Frequency Stability	20 MHz	Band 1&4	-	40/157	2
	40 MHz	Band 1&4	-	38/151	2
	80 MHz	Band 1&4	-	42/155	2

Note:

1. There are two modes of EUT, one is beamforming mode and the other is non-beamforming mode for 802.11a/n/ac. After evaluating, beamforming mode had been evaluated to be the worst case, so it was selected to record in this test report.
2. VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link with Adapter

For Radiated Emission test (Below 1GHz):

Mode 1. Normal Link with Adapter

For Radiated Emission test (Above 1GHz):

Mode 1. CTX - Place EUT in Z axis

For Co-location MPE Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA4N1172-36AA) test is added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	TW0006	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR3D2474AA and FR3D2474AB

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Updating the Applicant's Address. 2. Updating the Manufacturer's Address. 3. Updating the Brand Name from "Linksys" to "LINKSYS". 4. Removing the EUT 2 (Second Source)	Do not effect the test results.
5. Adding an adapter (Model: MU18A2120150-A1)	1. AC Conducted Emissions 2. Radiated Emissions below 1GHz
6. Updating 5GHz Band 1 to "New Rules" from "Old Rules".	1. 26dB Bandwidth and 99% Occupied Bandwidth 2. Maximum Conducted Output Power 3. Power Spectral Density 4. Radiated Emissions above 1GHz 5. Band Edge Emissions 6. Frequency Stability
7. Updating 5GHz Band 4 to "New Rules" from "Old Rules".	1. 26dB Bandwidth and 99% Occupied Bandwidth 2. 6dB Spectrum Bandwidth 3. Maximum Conducted Output Power 4. Power Spectral Density 5. Radiated Emissions above 1GHz 6. Band Edge Emissions 7. Frequency Stability

3.8. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E6430	DoC
Flash disk	Silicon	I-Series	DoC

For Test Site No: 03CH01-CB (Below 1GHz)

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E4300	DoC
Flash disk	Silicon Power	I-Series	DoC

For Test Site No: 03CH01-CB (Above 1GHz)

Support Unit	Brand	Model	FCC ID
NB*2	DELL	E4300	DoC
WLAN module	Broadcom	BCM943162ZP	QDS-BRCM1075

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	MT7662 QA V0.0.2.3					
Mode	Test Frequency (MHz)					
	NCB: 20MHz					
5180 MHz	5200 MHz	5240 MHz	5745 MHz	5785 MHz	5825 MHz	
802.11a	1B/1C	25/26	27/28	17/17	27/26	1E/1E
802.11ac MCS0/Nss1 VHT20	1E/1F	25/26	25/26	16/16	26/26	1D/1E
Mode	NCB: 40MHz					
802.11ac MCS0/Nss1 VHT40	5190 MHz		5230 MHz	5755 MHz	5795 MHz	
	1B/1C		25/26	16/15	1F/1E	
Mode	NCB: 80MHz					
802.11ac MCS0/Nss1 VHT80	5210 MHz			5775 MHz		
	06/07			13/13		

3.10. EUT Operation during Test

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:


1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe" to link with the remote workstation to receive and transmit packet by WLAN module and transmit duty cycle no less 98%

3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	1.420	1.650	86.06	0.65	0.70
802.11ac MCS0/Nss1 VHT20	1.360	1.580	86.08	0.65	0.74
802.11ac MCS0/Nss1 VHT40	0.640	0.884	72.40	1.40	1.56
802.11ac MCS0/Nss1 VHT80	0.306	0.542	56.46	2.48	3.27

3.12. Test Configurations


3.12.1. AC Power Line Conduction Emissions Test Configuration

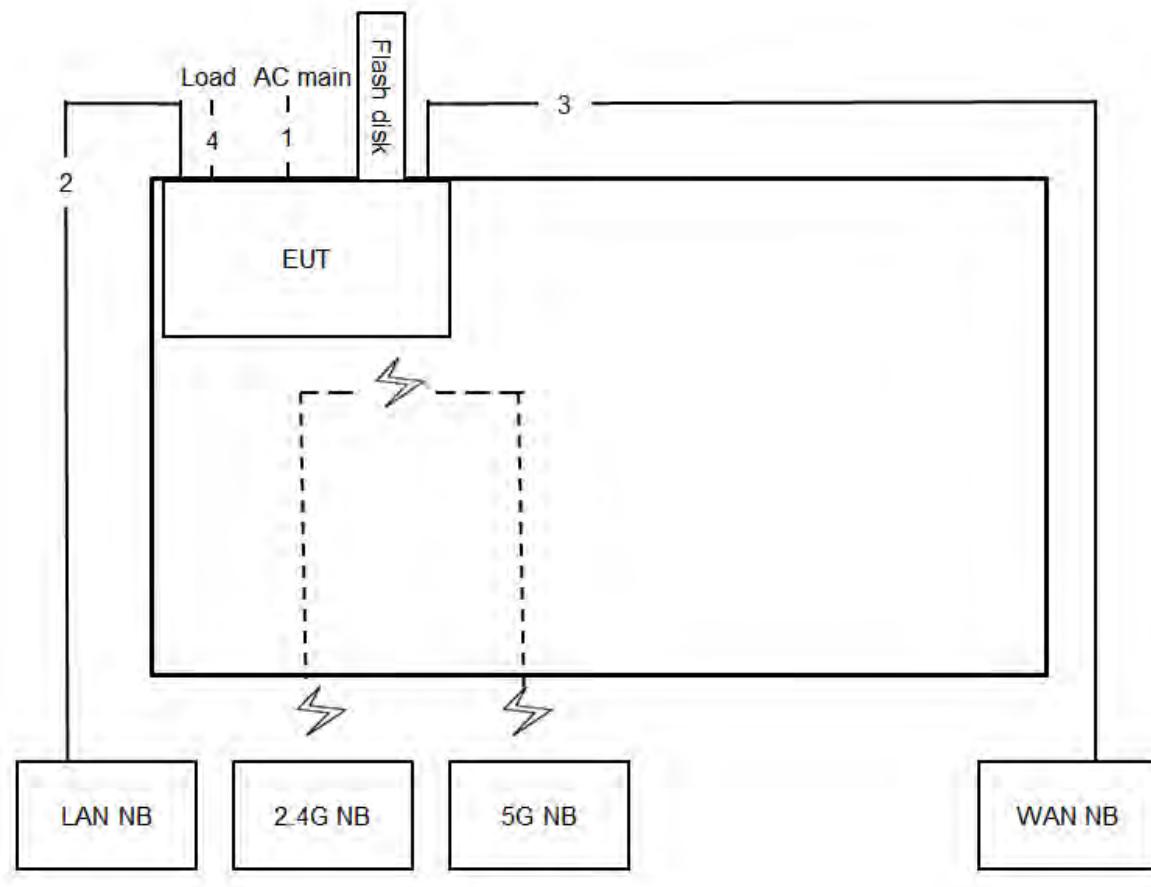

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	10m
4	RJ-45 cable*3	No	1.5m


3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

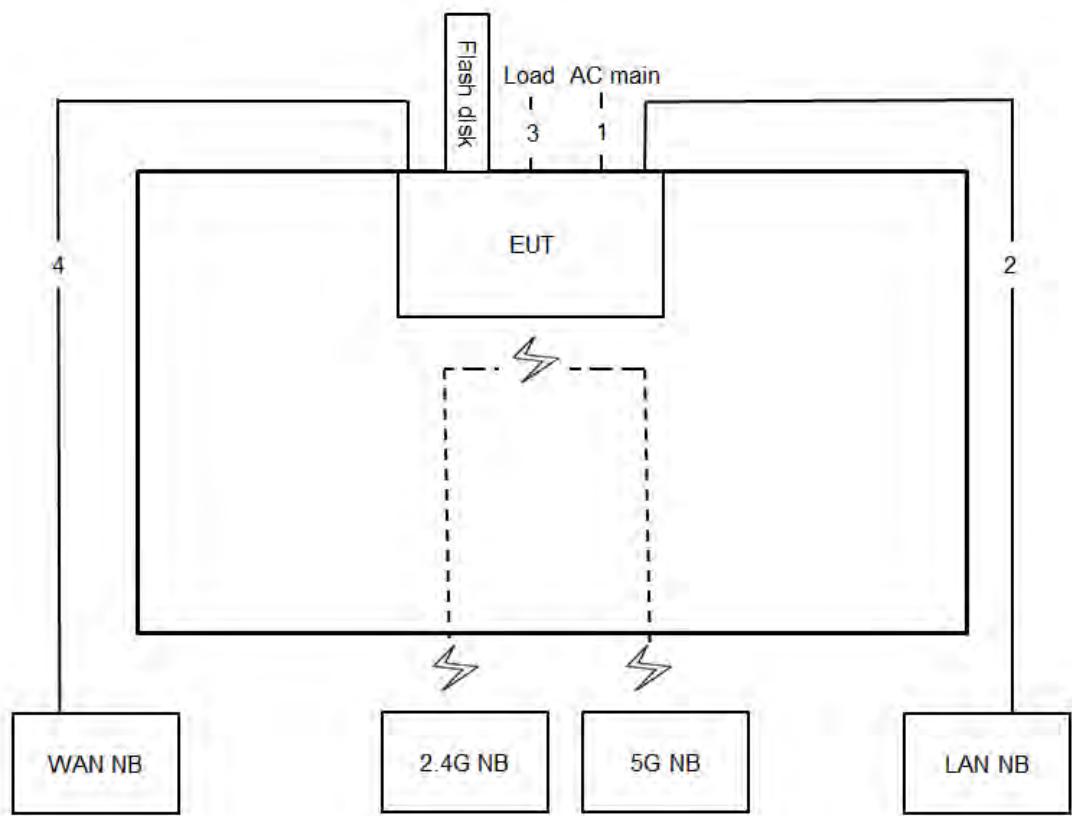

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45*3 cable	No	1.5m
4	RJ-45 cable	No	10m

Test Configuration: above 1GHz

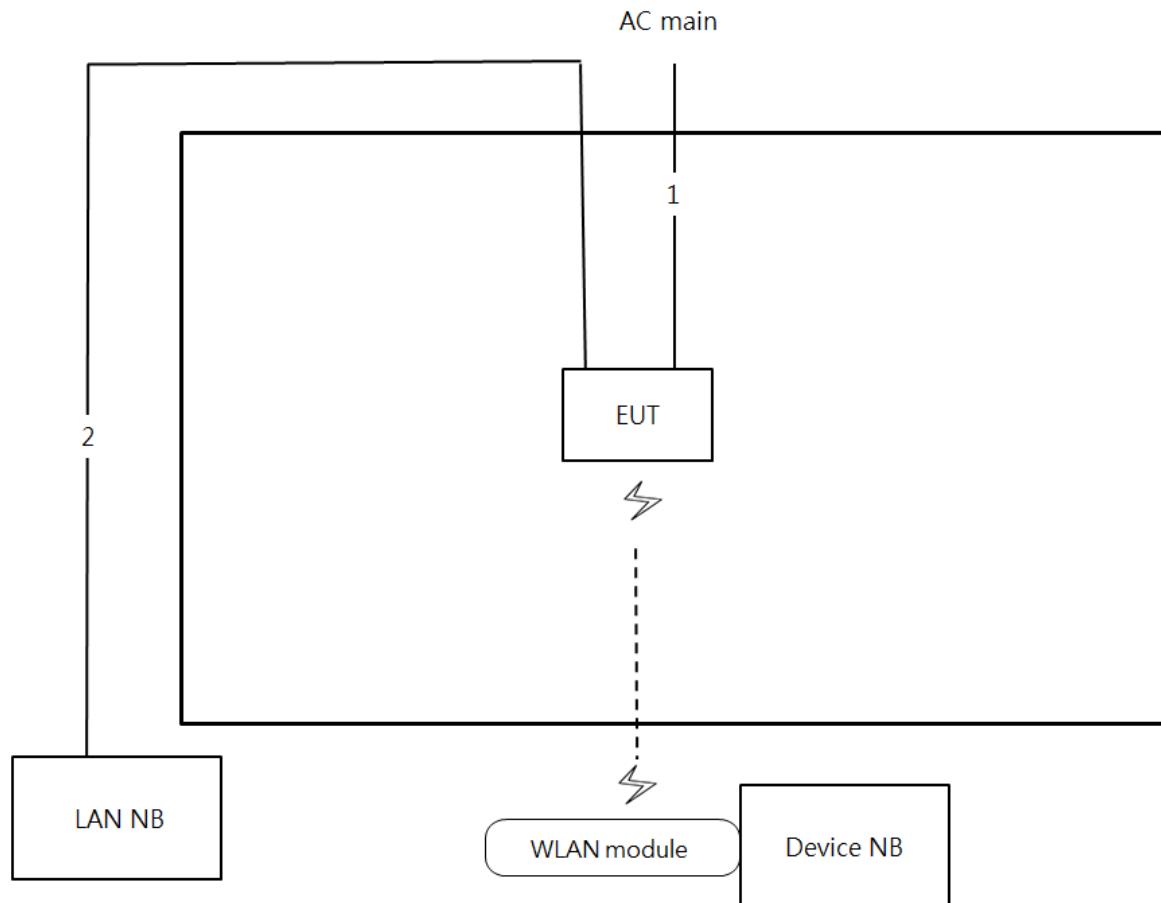

Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

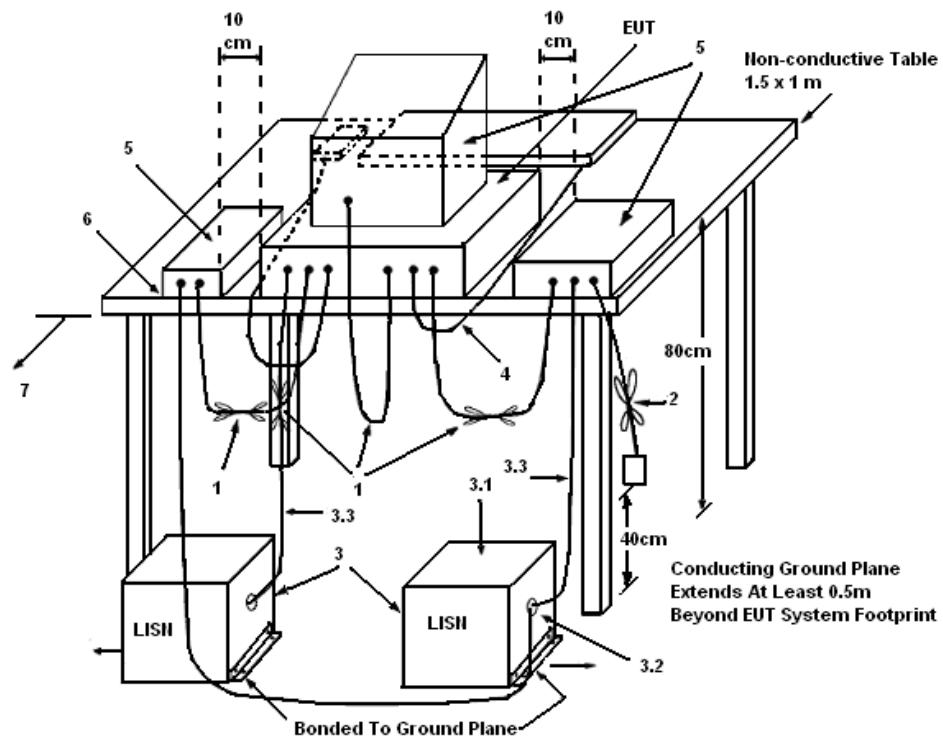

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in $50\ \Omega$. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	20°C	Humidity	59%
Test Engineer	Edison Lin	Phase	Line
Configuration	Normal Link		

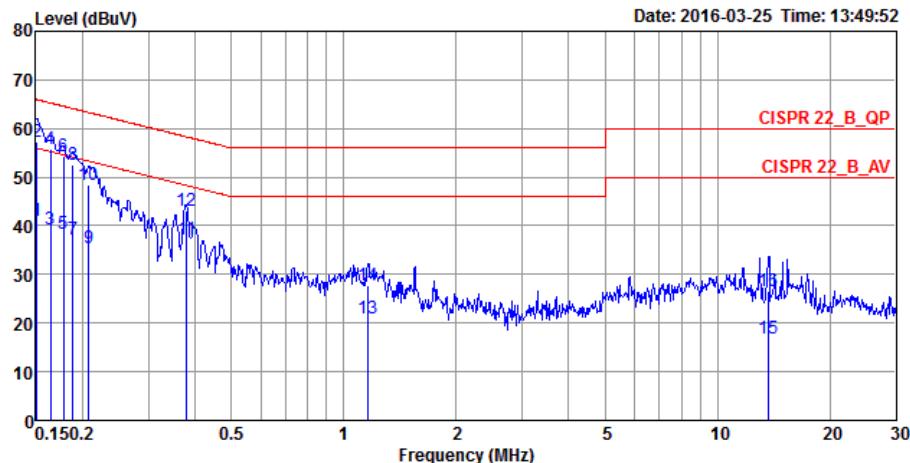

Freq	Level	Over Limit	Limit Line	LISN		Cable Loss	Pol/Phase	
				MHz	dBuV	dB	dBuV	dB
1	0.1508	41.16	-14.80	55.96	31.04	9.96	Average	0.16 LINE
2	0.1508	57.15	-8.81	65.96	47.03	9.96	QP	0.16 LINE
3	0.1641	39.36	-15.89	55.25	29.24	9.96	Average	0.16 LINE
4	0.1641	55.92	-9.33	65.25	45.80	9.96	QP	0.16 LINE
5	0.1777	38.27	-16.32	54.59	28.14	9.95	Average	0.18 LINE
6	0.1777	54.21	-10.38	64.59	44.08	9.95	QP	0.18 LINE
7	0.1884	37.13	-16.98	54.11	27.00	9.95	Average	0.18 LINE
8	0.1884	52.64	-11.47	64.11	42.51	9.95	QP	0.18 LINE
9	0.2072	35.40	-17.92	53.32	25.27	9.95	Average	0.18 LINE
10	0.2072	48.29	-15.03	63.32	38.16	9.95	QP	0.18 LINE
11	0.3791	37.28	-11.02	48.30	27.07	10.01	Average	0.20 LINE
12	0.3791	43.12	-15.18	58.30	32.91	10.01	QP	0.20 LINE
13	1.1595	20.88	-25.12	46.00	10.62	10.06	Average	0.20 LINE
14	1.1595	27.65	-28.35	56.00	17.39	10.06	QP	0.20 LINE
15	13.6952	16.90	-33.10	50.00	6.27	10.21	Average	0.42 LINE
16	13.6952	26.63	-33.37	60.00	16.00	10.21	QP	0.42 LINE

Temperature	20°C	Humidity	59%
Test Engineer	Edison Lin	Phase	Neutral
Configuration	Normal Link		

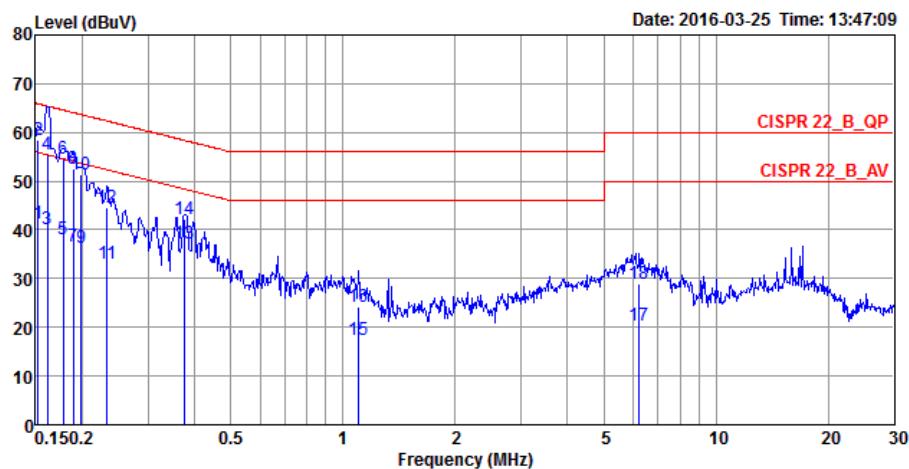

Freq	Level	Over	Limit	Read	LISN	Cable		
		Limit	Line	Level	Factor		Loss	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		dB
1	0.1524	41.22	-14.65	55.87	31.10	9.96	Average	0.16 NEUTRAL
2	0.1524	58.39	-7.48	65.87	48.27	9.96	QP	0.16 NEUTRAL
3	0.1616	40.10	-15.28	55.38	29.98	9.96	Average	0.16 NEUTRAL
4	0.1616	55.59	-9.79	65.38	45.47	9.96	QP	0.16 NEUTRAL
5	0.1777	37.99	-16.60	54.59	27.85	9.96	Average	0.18 NEUTRAL
6	0.1777	54.66	-9.93	64.59	44.52	9.96	QP	0.18 NEUTRAL
7	0.1894	36.71	-17.35	54.06	26.57	9.96	Average	0.18 NEUTRAL
8	0.1894	52.47	-11.59	64.06	42.33	9.96	QP	0.18 NEUTRAL
9	0.1986	36.17	-17.50	53.67	26.03	9.96	Average	0.18 NEUTRAL
10	0.1986	51.31	-12.36	63.67	41.17	9.96	QP	0.18 NEUTRAL
11	0.2329	33.00	-19.35	52.35	22.86	9.96	Average	0.18 NEUTRAL
12	0.2329	44.61	-17.74	62.35	34.47	9.96	QP	0.18 NEUTRAL
13	0.3751	37.34	-11.05	48.39	27.17	9.97	Average	0.20 NEUTRAL
14	0.3751	42.25	-16.14	58.39	32.08	9.97	QP	0.20 NEUTRAL
15	1.0997	17.42	-28.58	46.00	7.25	9.97	Average	0.20 NEUTRAL
16	1.0997	24.17	-31.83	56.00	14.00	9.97	QP	0.20 NEUTRAL
17	6.2189	20.44	-29.56	50.00	10.01	10.08	Average	0.35 NEUTRAL
18	6.2189	29.05	-30.95	60.00	18.62	10.08	QP	0.35 NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	20°C	Humidity	61%
Test Engineer	Peter Wu / Taka Hsu		


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	20.00	16.85
	5200 MHz	30.00	17.71
	5240 MHz	33.91	19.02
	5745 MHz	34.43	18.67
	5785 MHz	36.00	21.10
	5825 MHz	23.22	16.93
802.11ac MCS0/Nss1 VHT20	5180 MHz	23.65	17.71
	5200 MHz	35.30	18.58
	5240 MHz	35.48	18.67
	5745 MHz	36.78	18.67
	5785 MHz	39.04	24.66
	5825 MHz	21.22	17.80
802.11ac MCS0/Nss1 VHT40	5190 MHz	41.16	36.32
	5230 MHz	76.23	38.35
	5755 MHz	41.45	36.18
	5795 MHz	68.12	36.90
802.11ac MCS0/Nss1 VHT80	5210 MHz	81.45	75.25
	5775 MHz	81.45	74.96

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5180 MHz

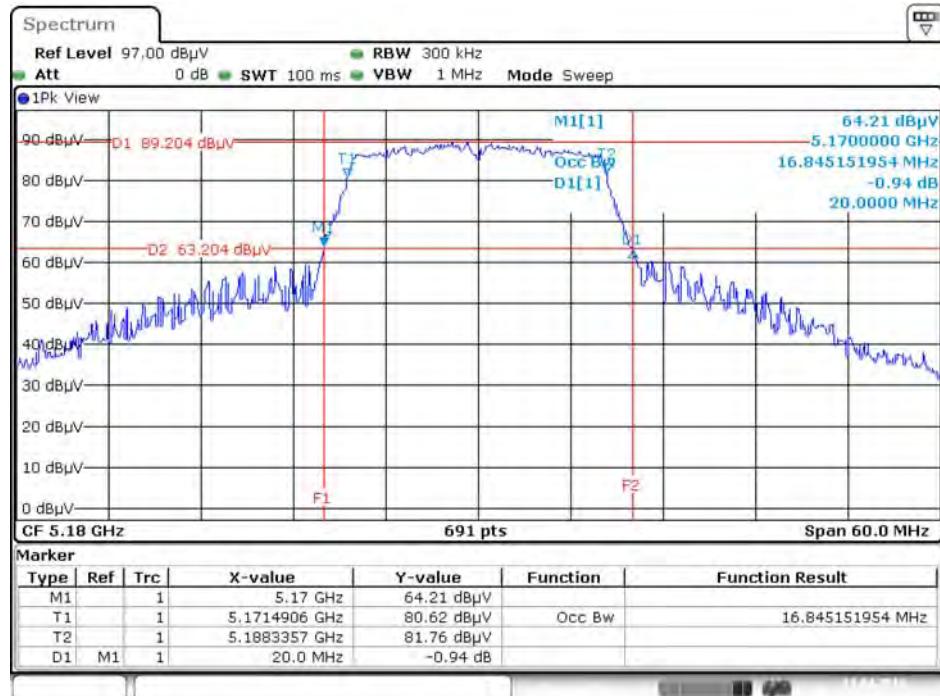


Date: 13.APR.2016 18:00:52

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5200 MHz

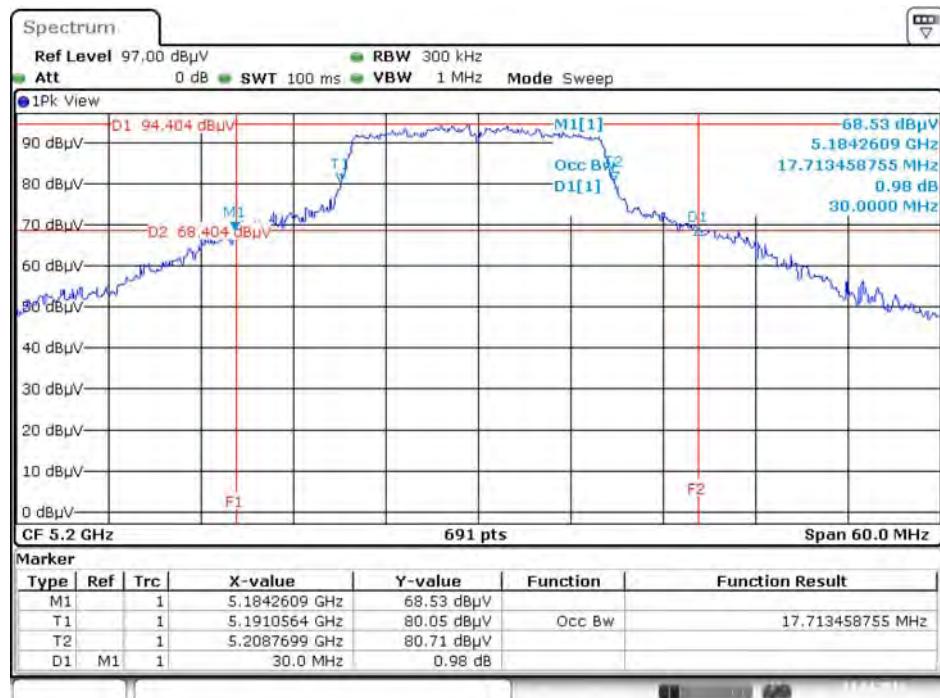


Date: 13.APR.2016 18:01:20

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5240 MHz

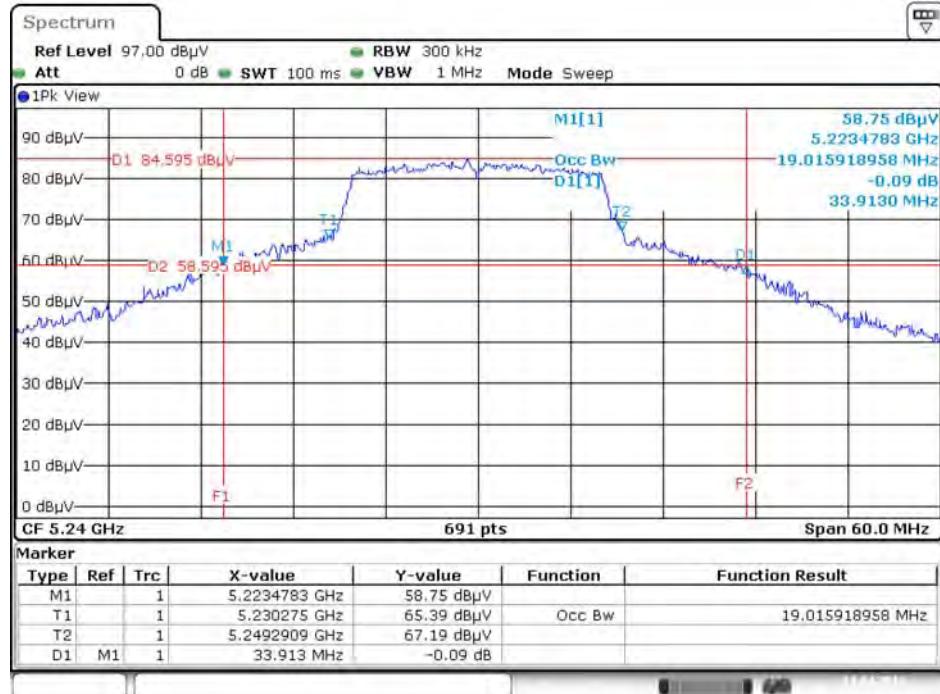


Date: 13.APR.2016 18:01:51

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5745 MHz

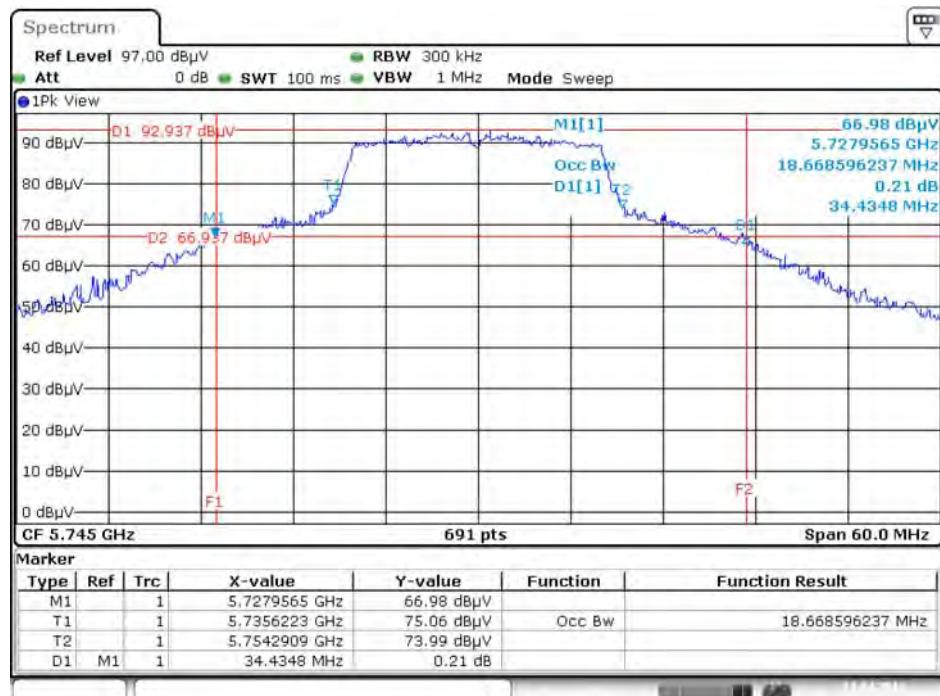


Date: 13.APR.2016 18:00:24

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5785 MHz

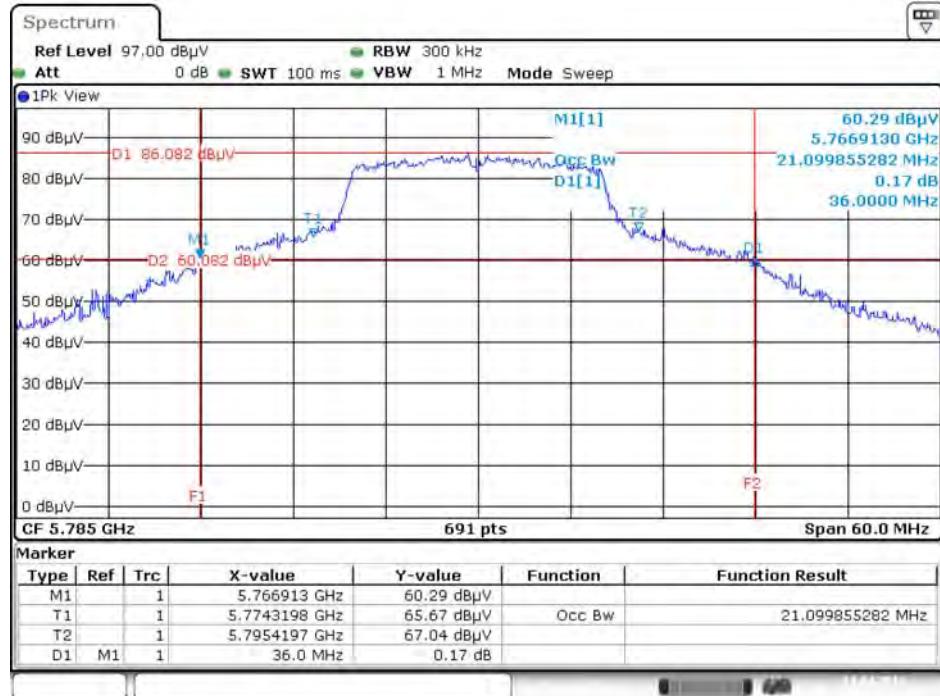

Date: 13.APR.2016 17:59:55


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5825 MHz

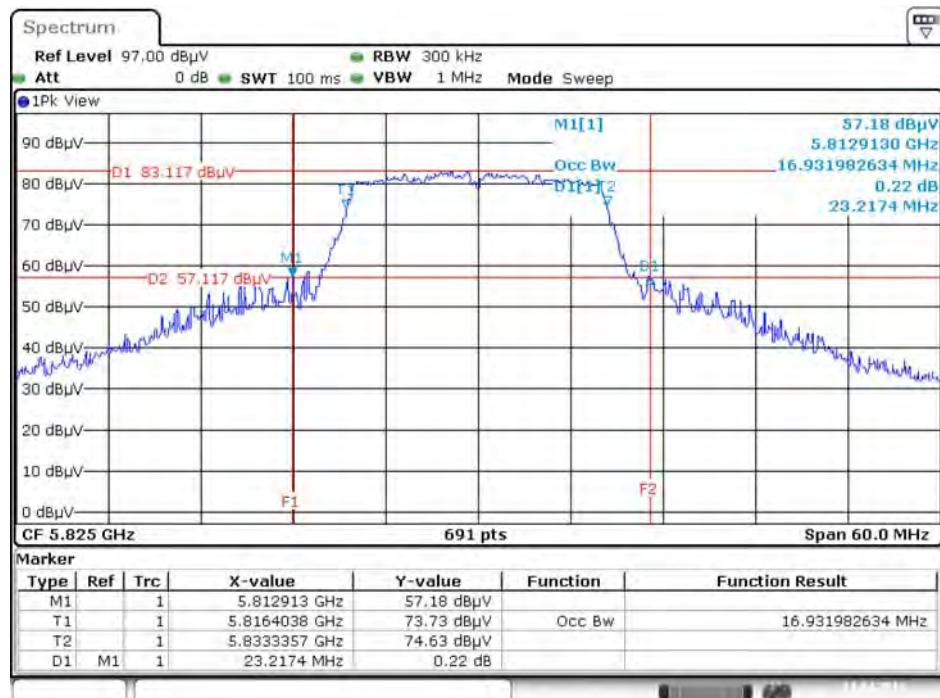

Date: 13.APR.2016 17:59:07




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5180 MHz

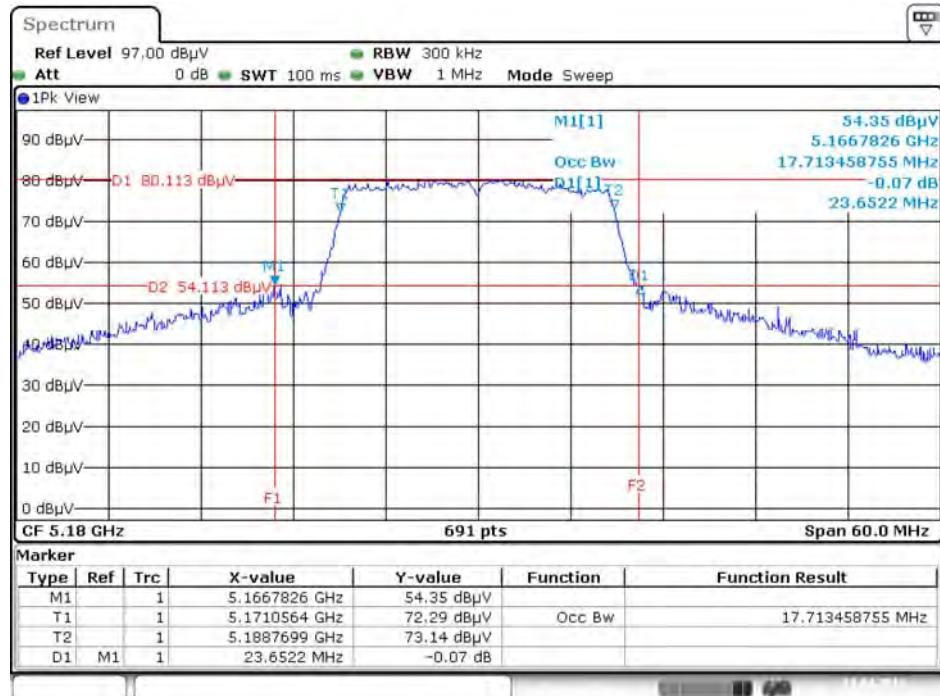


Date 13 APR 2016 17:49:54

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5200 MHz

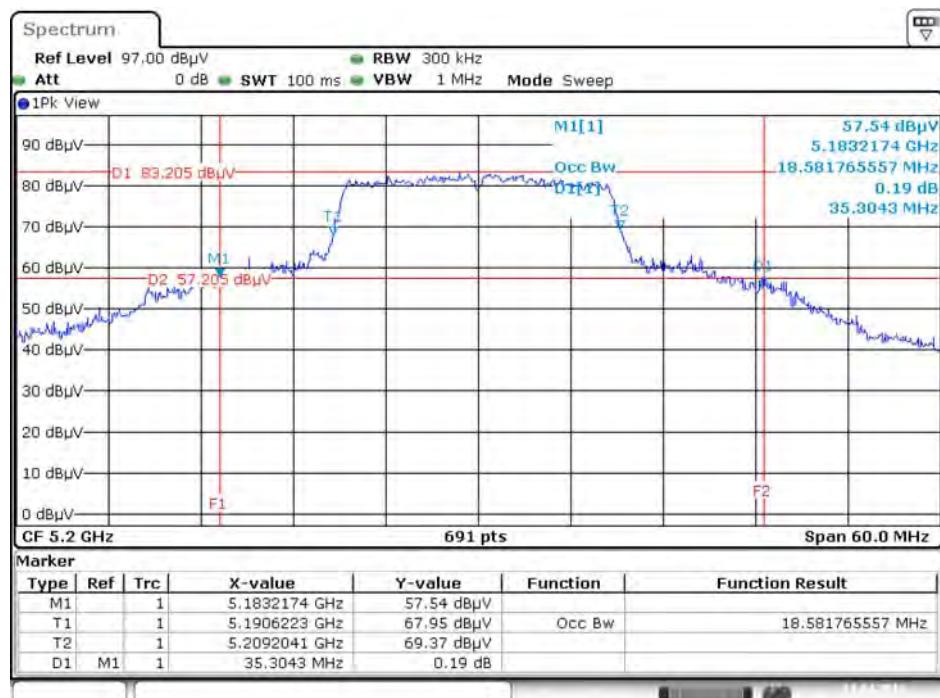


Date: 13 APR 2016 17:50:23


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Ant. 1 + Ant. 2 / 5240 MHz**

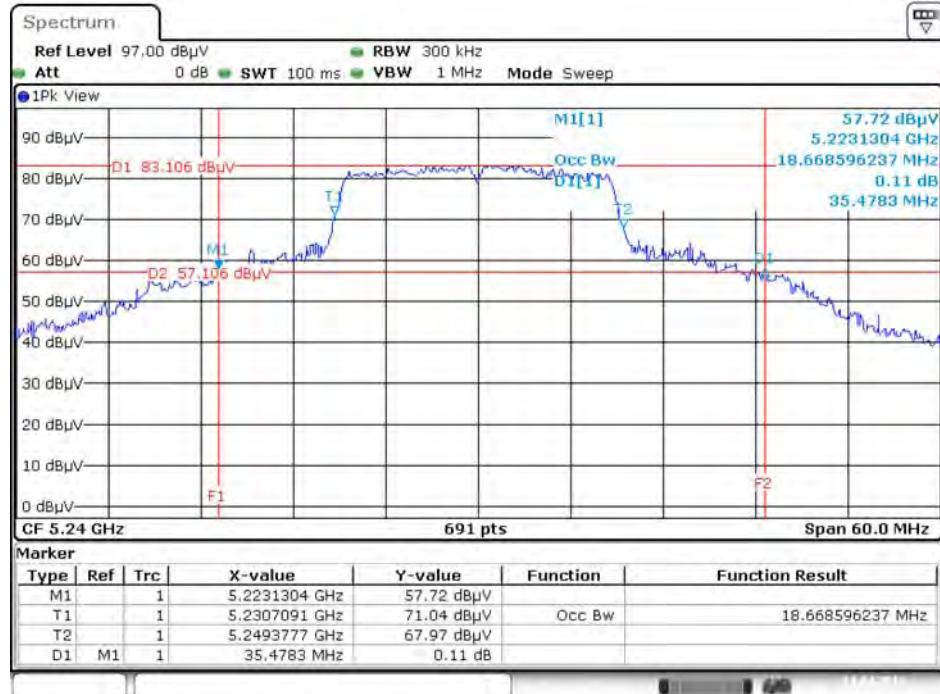


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Ant. 1 + Ant. 2 / 5745 MHz**

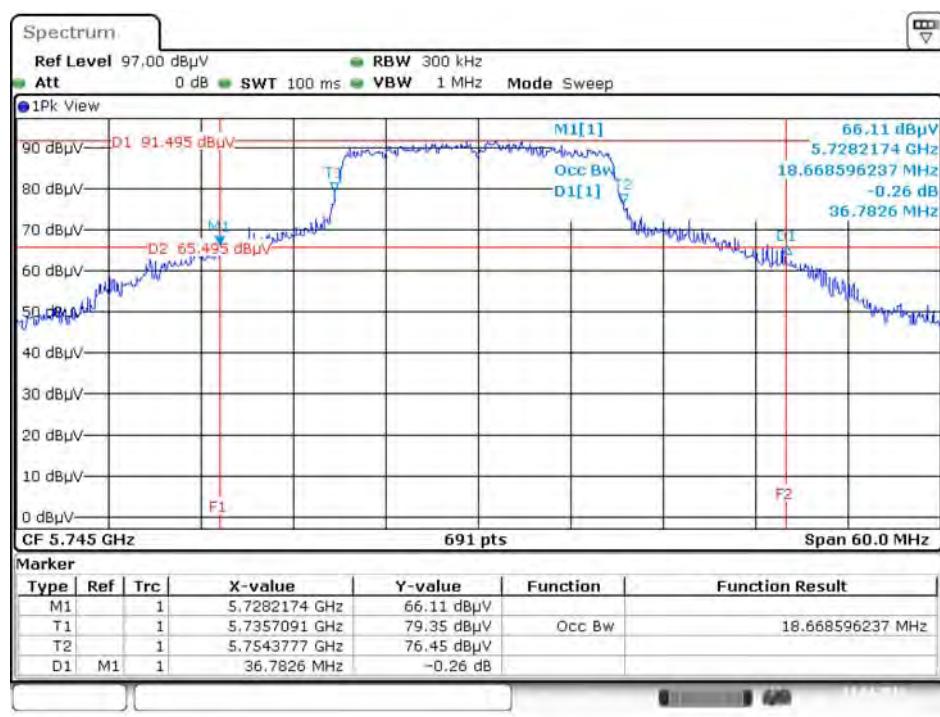


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Ant. 1 + Ant. 2 / 5785 MHz**

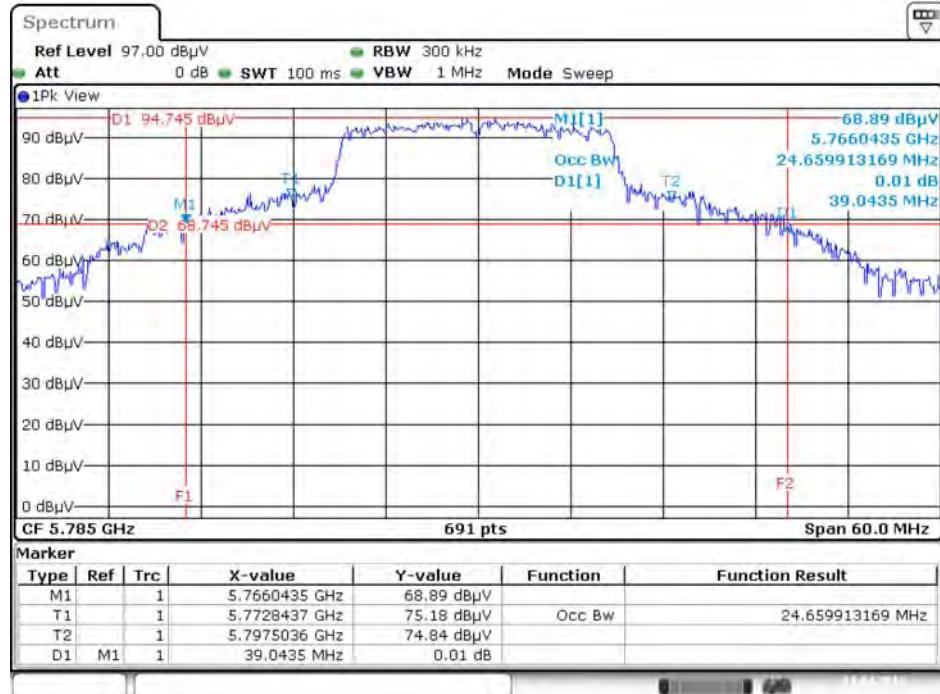

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /
Ant. 1 + Ant. 2 / 5825 MHz**

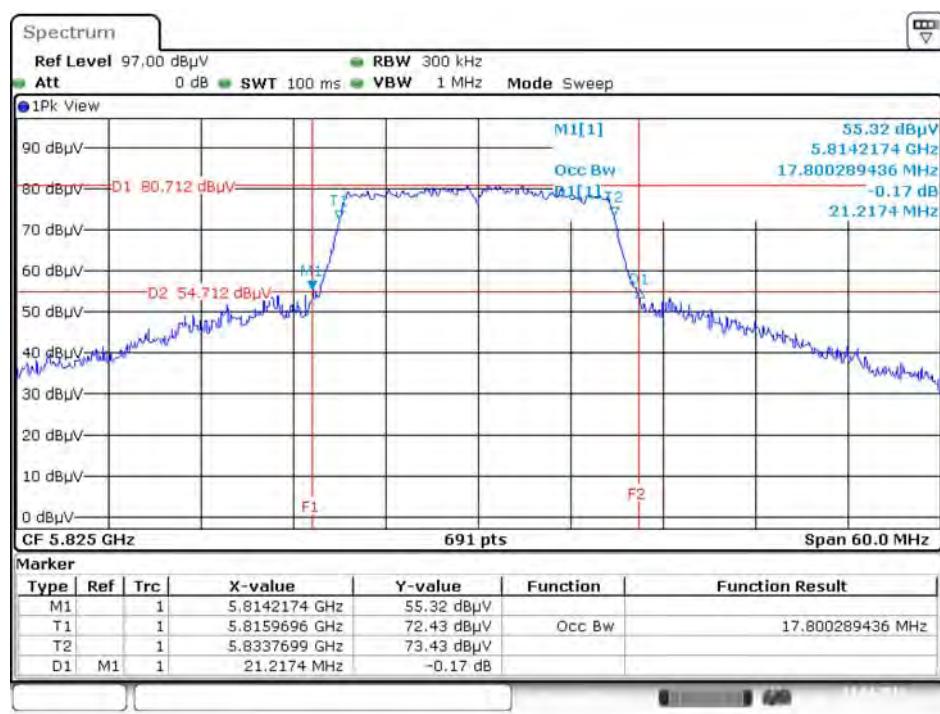


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /
Ant. 1 + Ant. 2 / 5190 MHz**

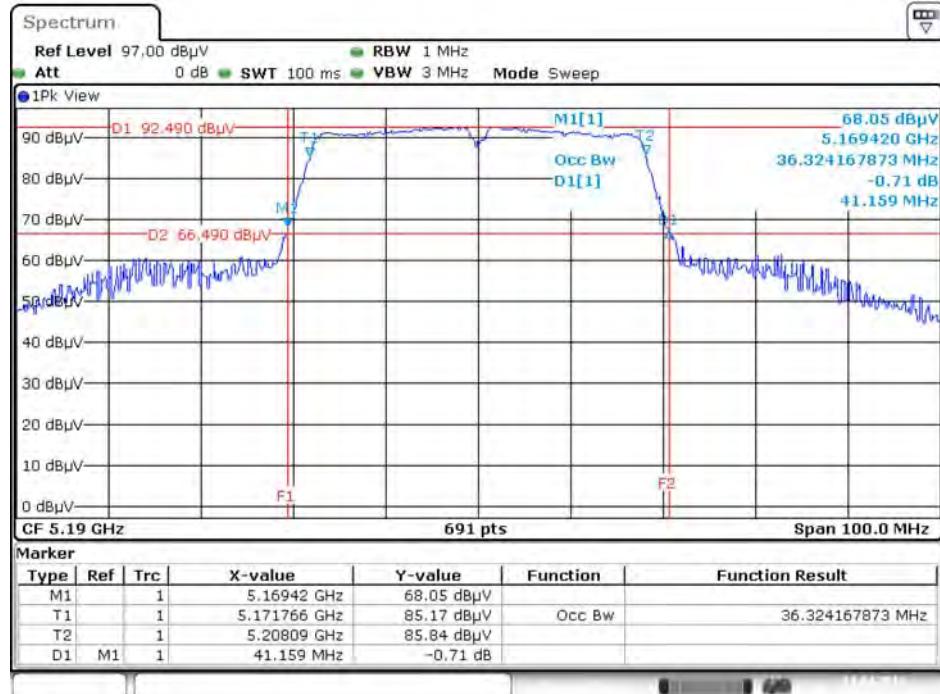


Date: 13.APR.2016 17:40:08

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /
Ant. 1 + Ant. 2 / 5230 MHz**

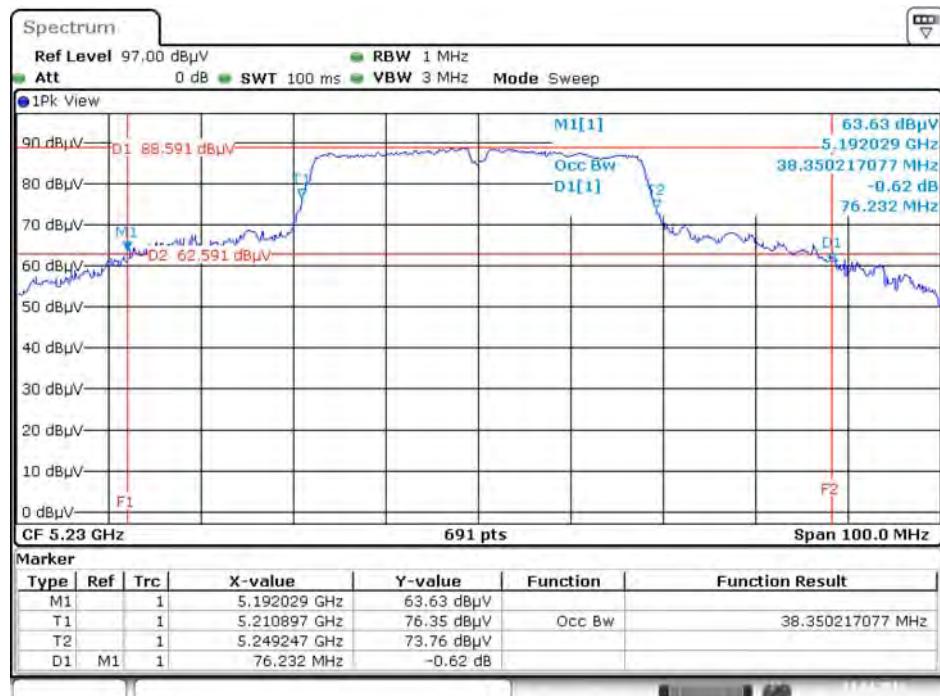


Date: 13.APR.2016 17:40:52

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /
Ant. 1 + Ant. 2 / 5755 MHz**

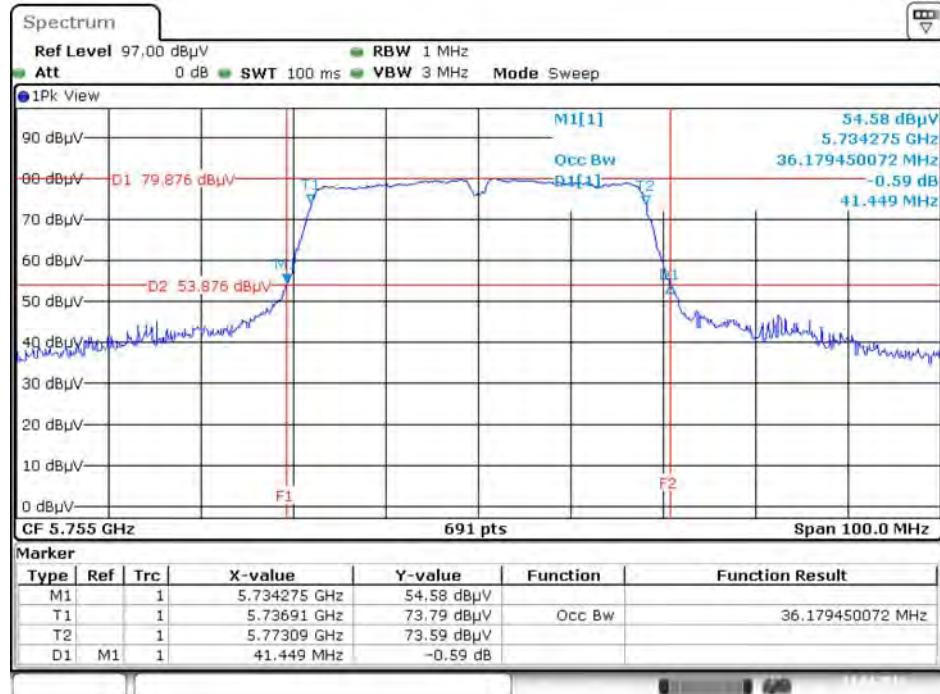


Date: 13.APR.2016 17:45:14

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /
Ant. 1 + Ant. 2 / 5795 MHz**

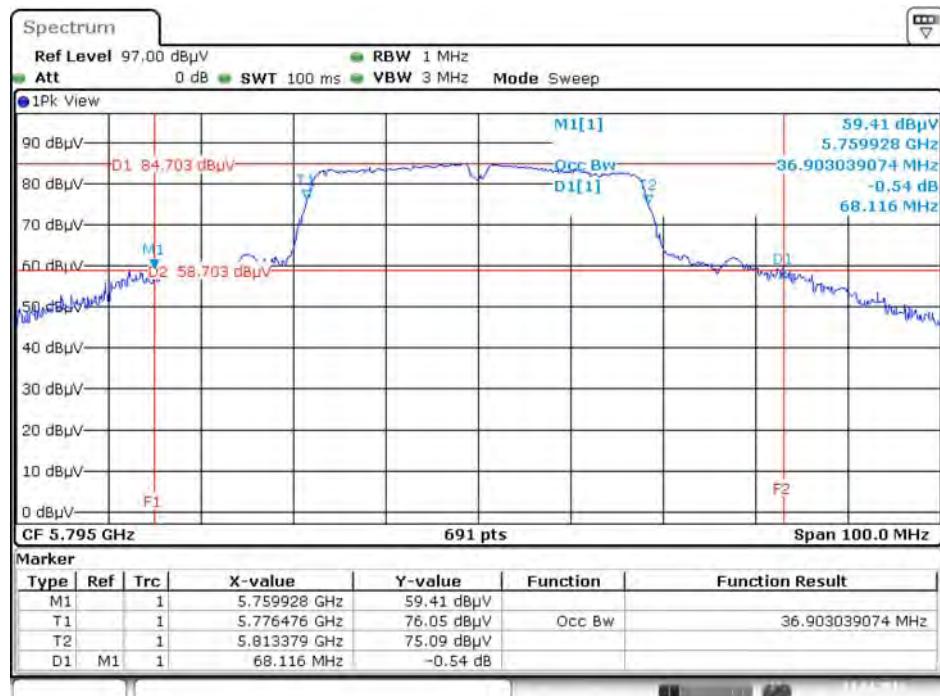


Date: 13.APR.2016 17:45:57

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5210 MHz

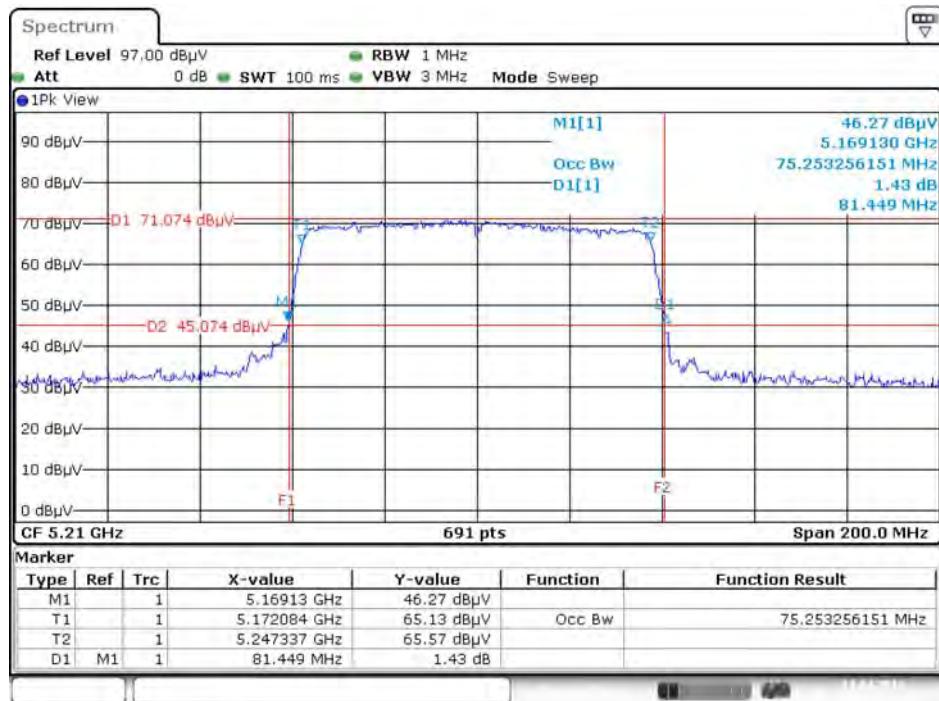

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5775 MHz

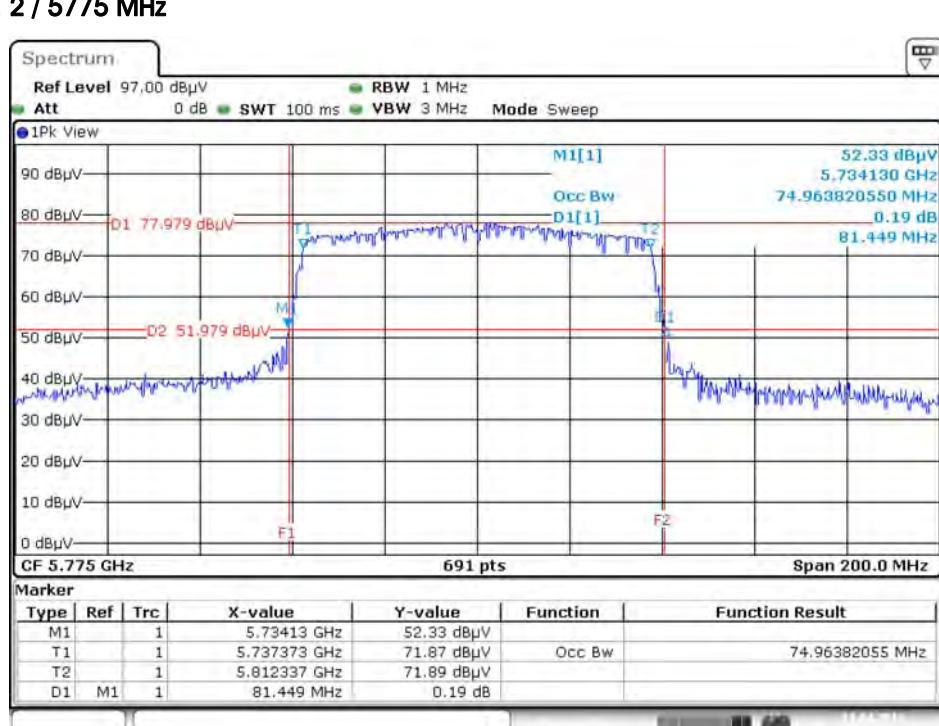

4.3. 6dB Spectrum Bandwidth Measurement

4.3.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times RBW$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (C) Emission Bandwidth.
3. Multiple antenna system was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.3.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.6.4.

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



4.3.7. Test Result of 6dB Spectrum Bandwidth


Temperature	20°C	Humidity	61%
Test Engineer	Peter Wu / Taka Hsu		

Mode	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	16.06	500	Complies
	5785 MHz	15.30	500	Complies
	5825 MHz	16.29	500	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	16.29	500	Complies
	5785 MHz	17.04	500	Complies
	5825 MHz	16.99	500	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	35.01	500	Complies
	5795 MHz	34.20	500	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	73.91	500	Complies


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

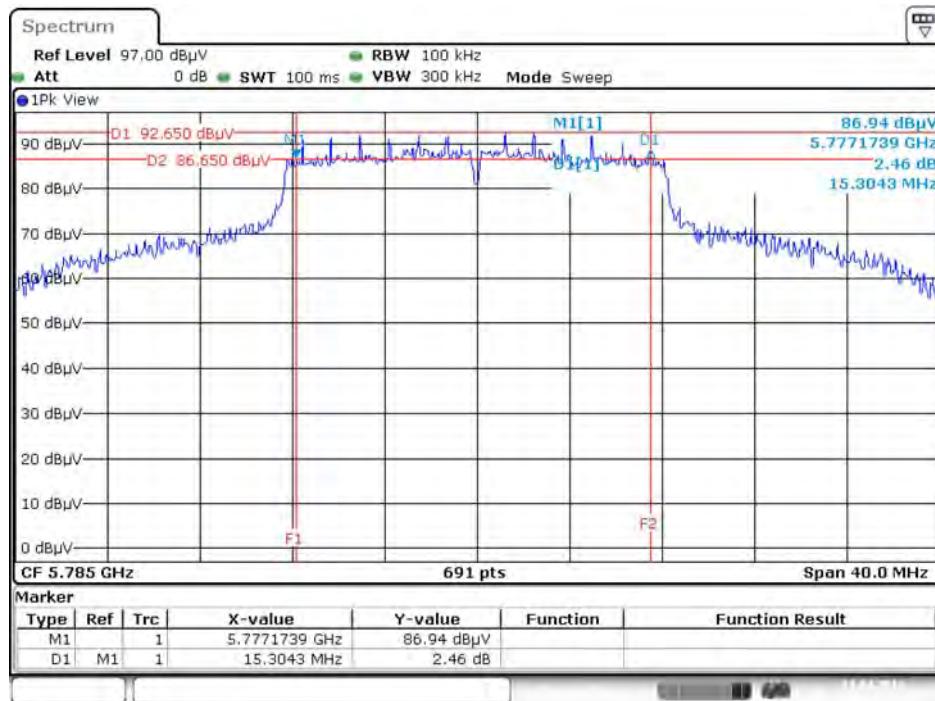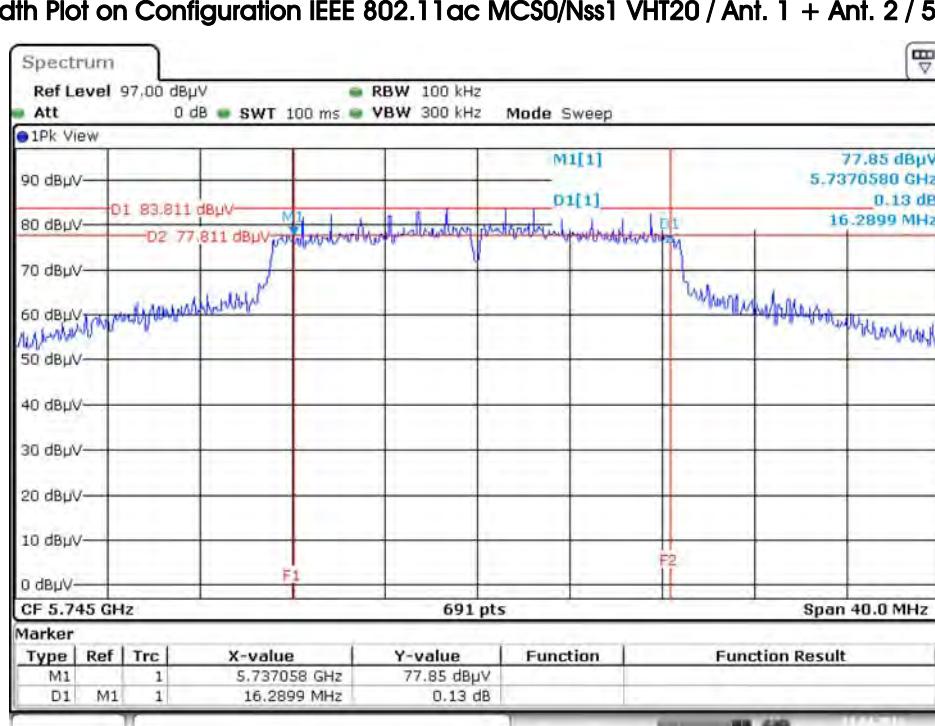6 dB Bandwidth Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5785 MHz

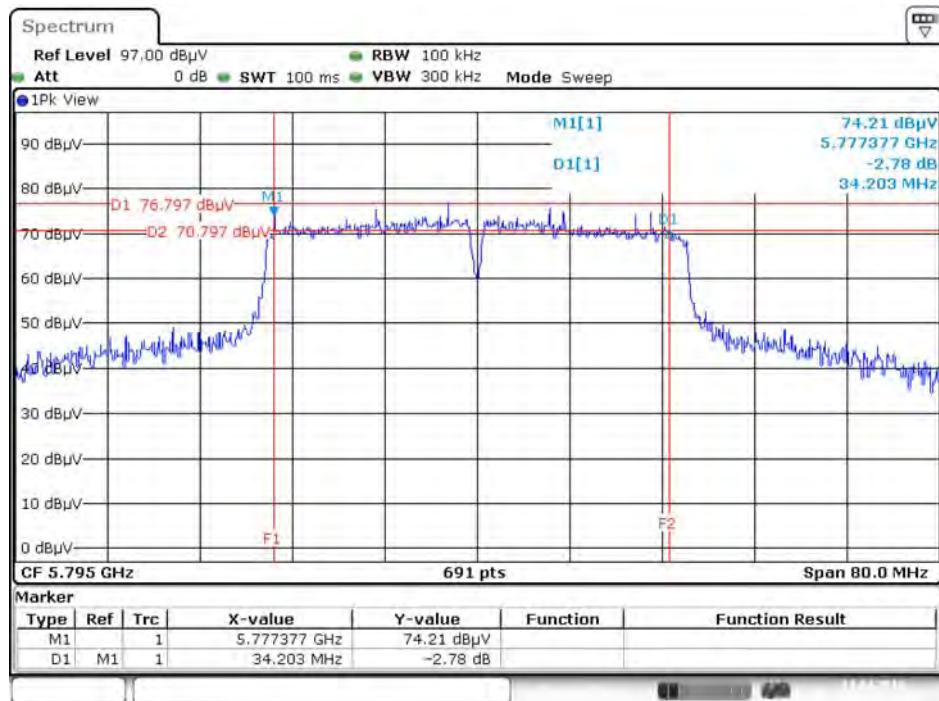6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5745 MHz


6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5795MHz

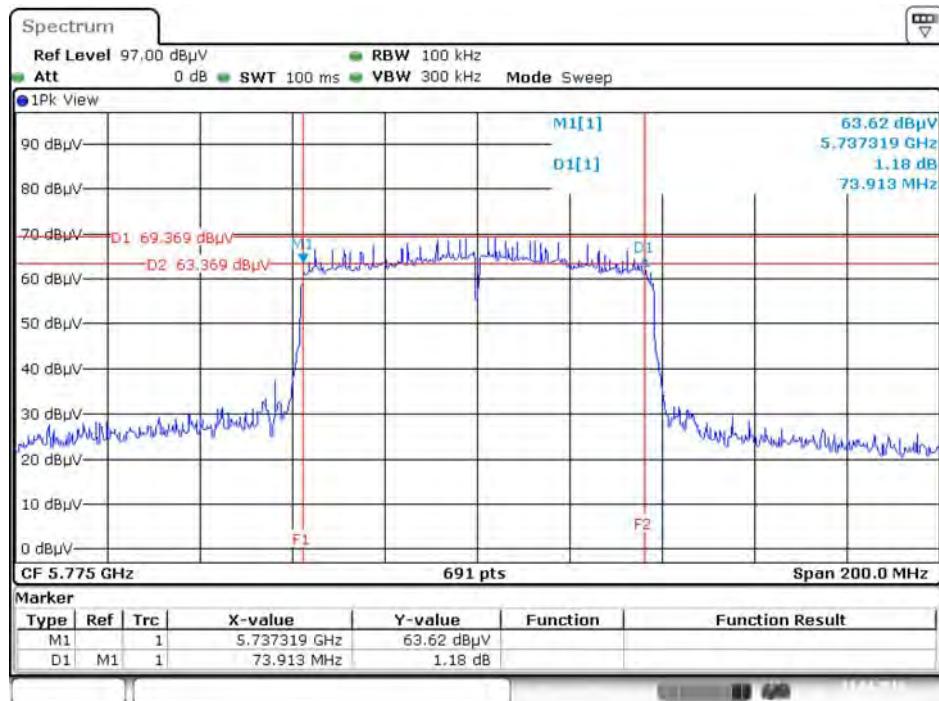
Date: 13.APR.2016 17:46:35

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5775 MHz


Date: 13.APR.2016 17:35:43

4.4. Maximum Conducted Output Power Measurement

4.4.1. Limit

Frequency Band		Limit
<input checked="" type="checkbox"/> 5.15~5.25 GHz		
Operating Mode		
<input type="checkbox"/>	Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
<input checked="" type="checkbox"/>	Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<input type="checkbox"/>	Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
<input type="checkbox"/>	Mobile and portable client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

<input checked="" type="checkbox"/>	5.725~5.85 GHz	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.
-------------------------------------	----------------	--

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.4.4. Test Setup Layout

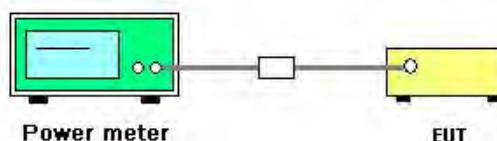

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	61%
Test Engineer	Peter Wu / Taka Hsu	Test Date	Apr. 13, 2016

Mode	Frequency	Conducted Power (dBm)			Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Total		
802.11a	5180 MHz	23.23	23.04	26.15	30.00	Complies
	5200 MHz	26.88	26.62	29.76	30.00	Complies
	5240 MHz	26.73	26.58	29.67	30.00	Complies
	5745 MHz	20.58	20.44	23.52	30.00	Complies
	5785 MHz	26.98	26.56	29.79	30.00	Complies
	5825 MHz	22.75	22.59	25.68	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	25.23	25.21	28.23	30.00	Complies
	5200 MHz	26.87	26.59	29.74	30.00	Complies
	5240 MHz	26.52	26.32	29.43	30.00	Complies
	5745 MHz	21.07	21.14	24.12	30.00	Complies
	5785 MHz	26.64	26.51	29.59	30.00	Complies
	5825 MHz	22.39	22.67	25.54	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	22.81	22.41	25.62	30.00	Complies
	5230 MHz	26.35	26.45	29.41	30.00	Complies
	5755 MHz	20.29	19.98	23.15	30.00	Complies
	5795 MHz	23.32	23.53	26.44	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	10.21	10.42	13.33	30.00	Complies
	5775 MHz	19.89	19.78	22.85	30.00	Complies

Note:

$$\text{For Band 1: } \text{Directional Gain} = 10 \log \left[\frac{\sum_{j=1}^{N_{\text{SS}}} \left(\sum_{k=1}^{N_{\text{ANT}}} g_{j,k} \right)^2}{N_{\text{ANT}}} \right] = 5.31 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

$$\text{For Band 4: } \text{Directional Gain} = 10 \log \left[\frac{\sum_{j=1}^{N_{\text{SS}}} \left(\sum_{k=1}^{N_{\text{ANT}}} g_{j,k} \right)^2}{N_{\text{ANT}}} \right] = 5.92 \text{ dBi} < 6 \text{ dBi, so the limit doesn't reduce.}$$

4.5. Power Spectral Density Measurement

4.5.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.4.1.

Frequency Band		Limit
<input checked="" type="checkbox"/>	5.15~5.25 GHz	
Operating Mode		
<input type="checkbox"/>	Outdoor access point	17 dBm/MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm/MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm/MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm/MHz
<input checked="" type="checkbox"/>	5.725~5.85 GHz	
	30 dBm/500kHz	

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01r02 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements and sum the spectra across the outputs.
4. For 5.725~5.85 GHz, the measured result of PSD level must add $10\log(500\text{kHz}/\text{RBW})$ and the final result should $\leq 30 \text{ dBm}$.

4.5.4. Test Setup Layout

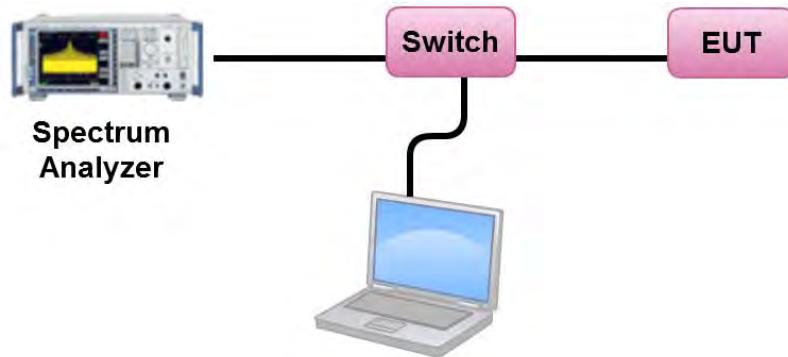

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Power Spectral Density

Temperature	20°C	Humidity	61%
Test Engineer	Peter Wu / Taka Hsu		

Configuration IEEE 802.11a / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	12.81	17.00	Complies
40	5200 MHz	16.33	17.00	Complies
48	5240 MHz	16.17	17.00	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}} \left\{\sum_{K=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right] = 5.31\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	10.13	-3.01	7.12	30.00	Complies
157	5785 MHz	16.41	-3.01	13.40	30.00	Complies
165	5825 MHz	12.25	-3.01	9.24	30.00	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}} \left\{\sum_{K=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right] = 5.92\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	14.78	17.00	Complies
40	5200 MHz	16.40	17.00	Complies
48	5240 MHz	16.04	17.00	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}} \left\{\sum_{K=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right] = 5.31\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
149	5745 MHz	10.54	-3.01	7.53	30.00	Complies
157	5785 MHz	15.98	-3.01	12.97	30.00	Complies
165	5825 MHz	11.97	-3.01	8.96	30.00	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}} \left\{\sum_{K=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right] = 5.92\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	9.44	17.00	Complies
46	5230 MHz	13.31	17.00	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}} \left\{\sum_{K=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right] = 5.31\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
151	5755 MHz	7.14	-3.01	4.13	30.00	Complies
159	5795 MHz	10.21	-3.01	7.20	30.00	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}} \left\{\sum_{K=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right] = 5.92\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-5.94	17.00	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}} \left\{\sum_{K=1}^{N_{ANT}} g_{j,k}\right\}^2}{N_{ANT}}\right] = 5.31\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.


Channel	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Result
155	5775 MHz	3.84	-3.01	0.83	30.00	Complies

Note: $Directional\ Gain = 10\log\left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{K=1}^{N_{ANT}} g_{j,k}\right)^2}{N_{ANT}}\right] = 5.92\text{dBi} < 6\text{dBi}$, so the limit doesn't reduce.


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5200 MHz

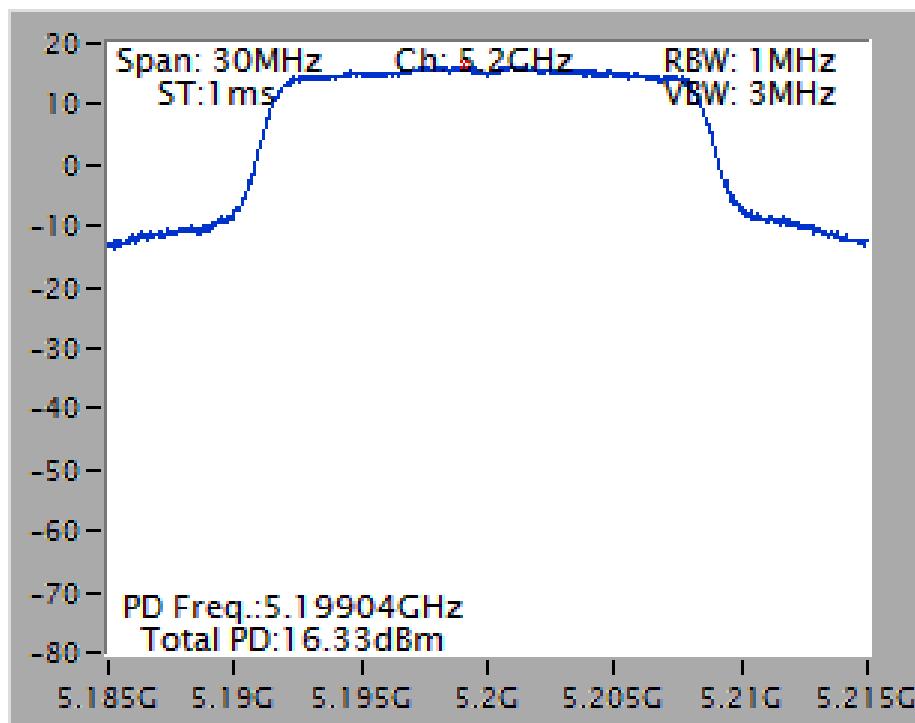


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 / 5785 MHz

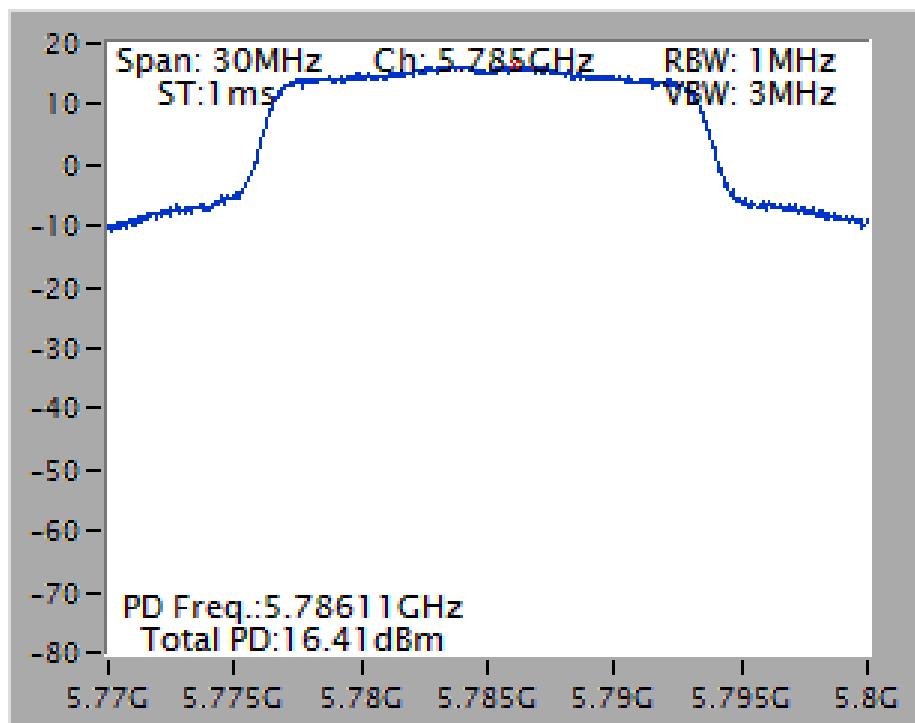


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5200 MHz

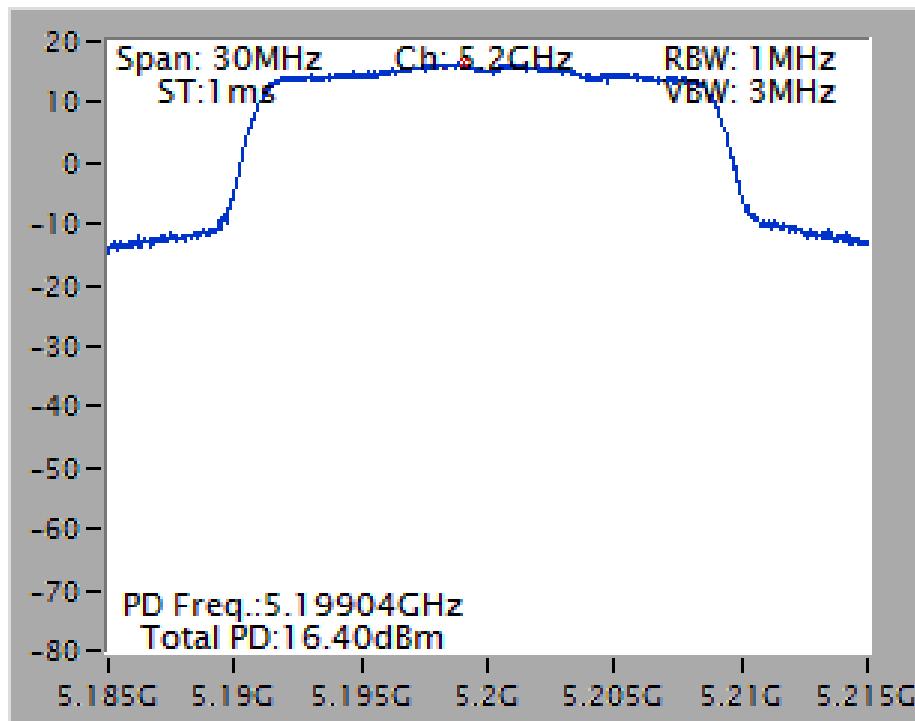


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 / 5785 MHz

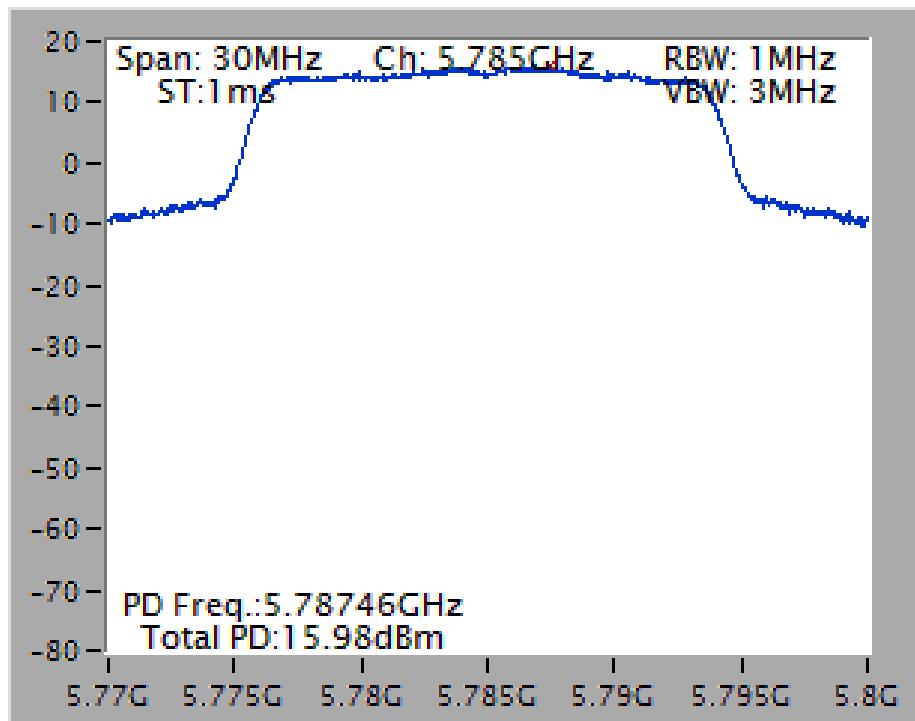


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5230 MHz

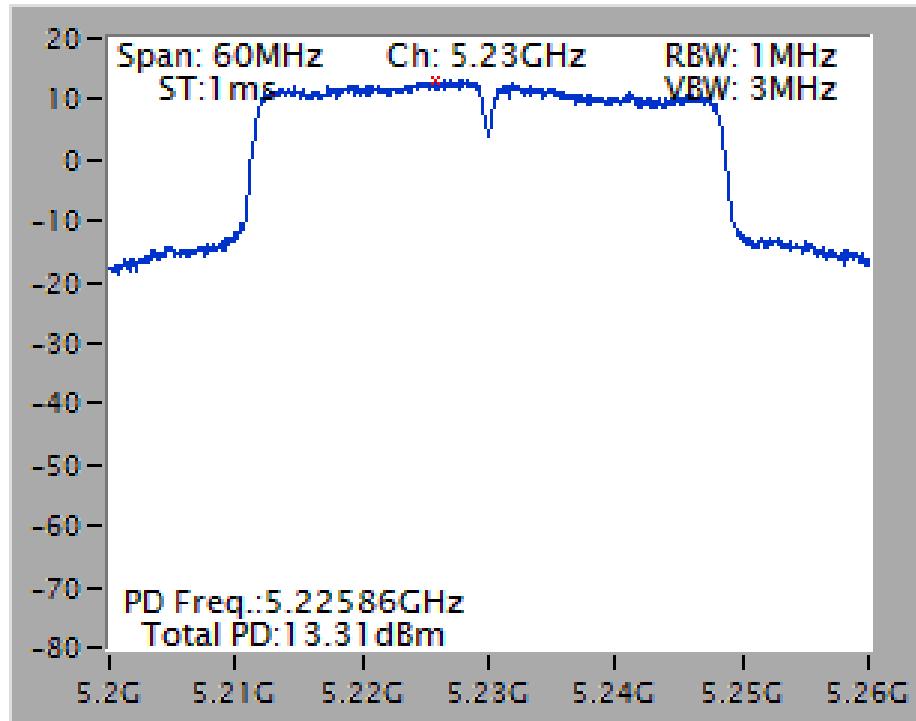


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 / 5795 MHz

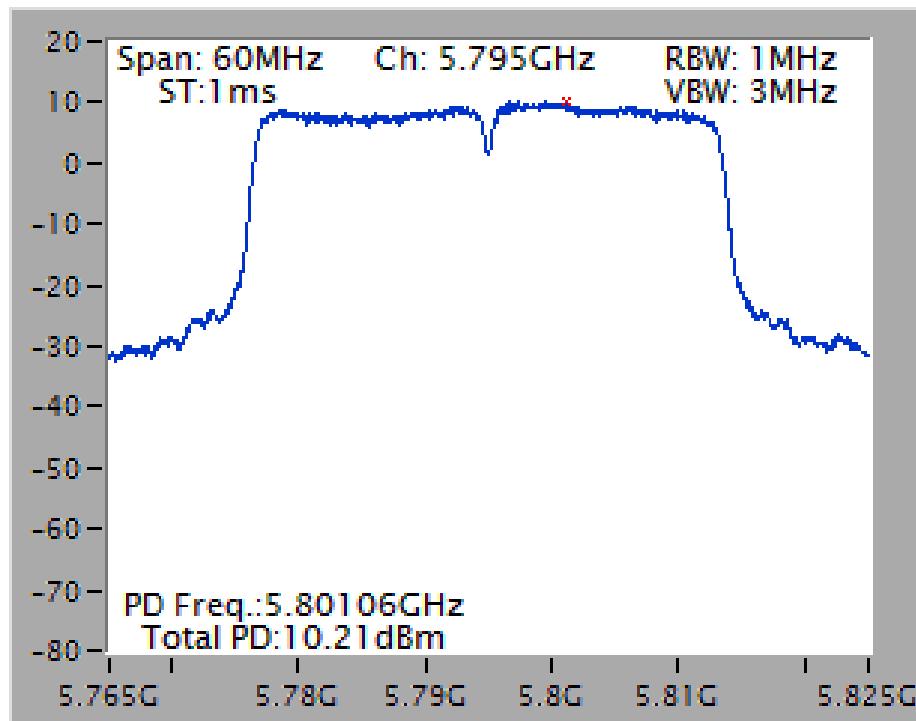

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5210 MHz

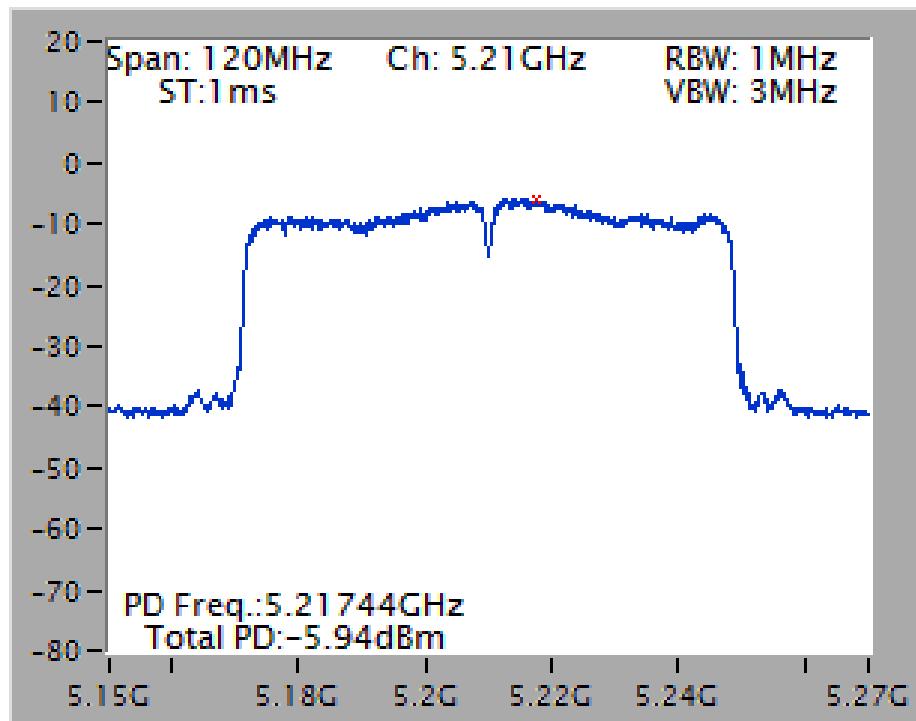

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 / 5775 MHz

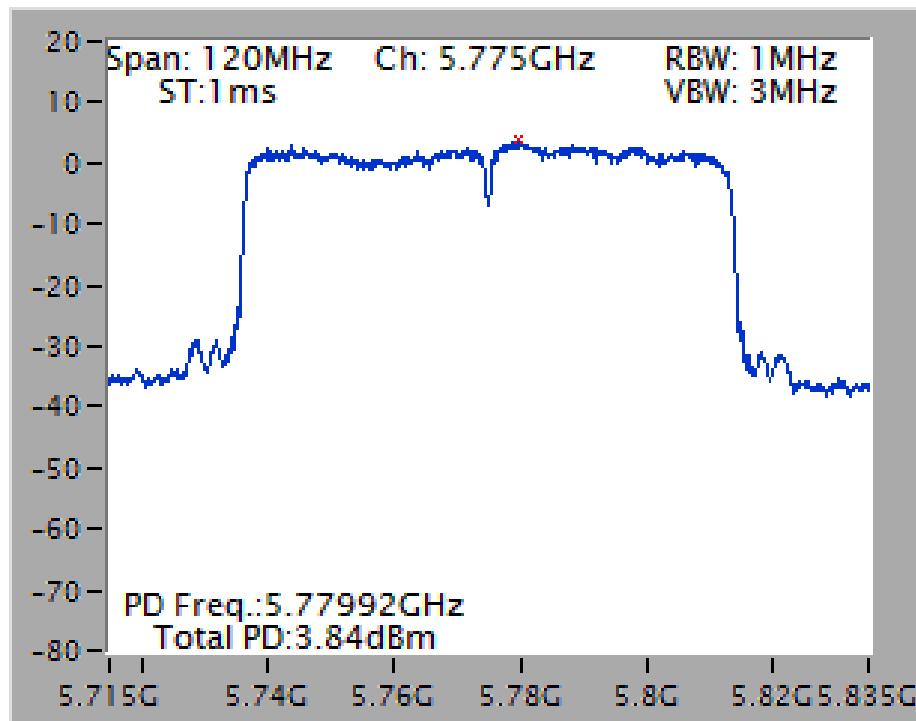

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

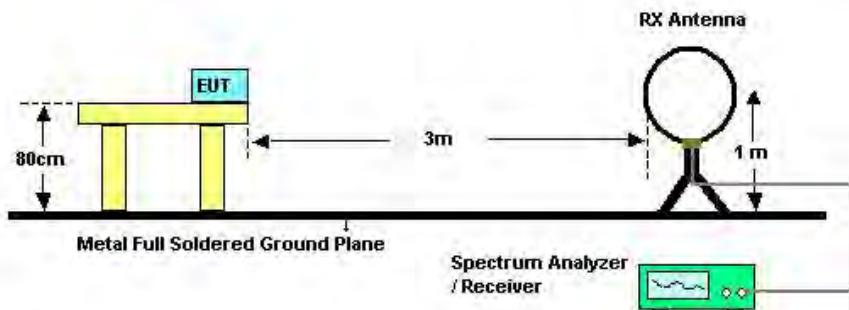

For Radiated Emissions: 30MHz~1GHz

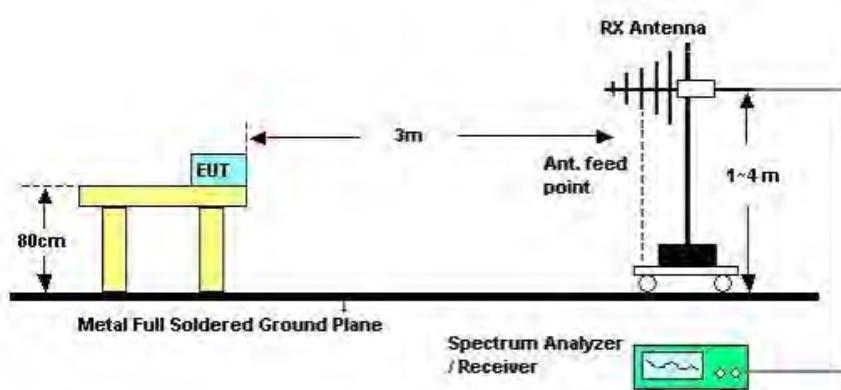

For Radiated Emissions: Above 1GHz

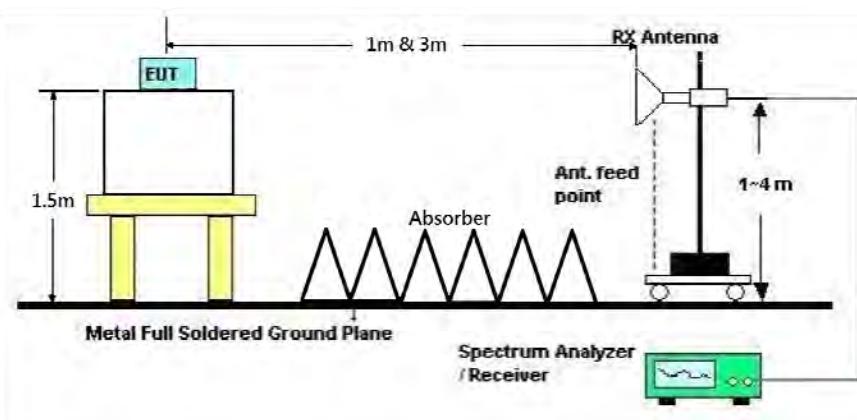

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	Normal Link
Test Date	Mar. 24, 2016		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


4.6.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	Normal Link

Horizontal

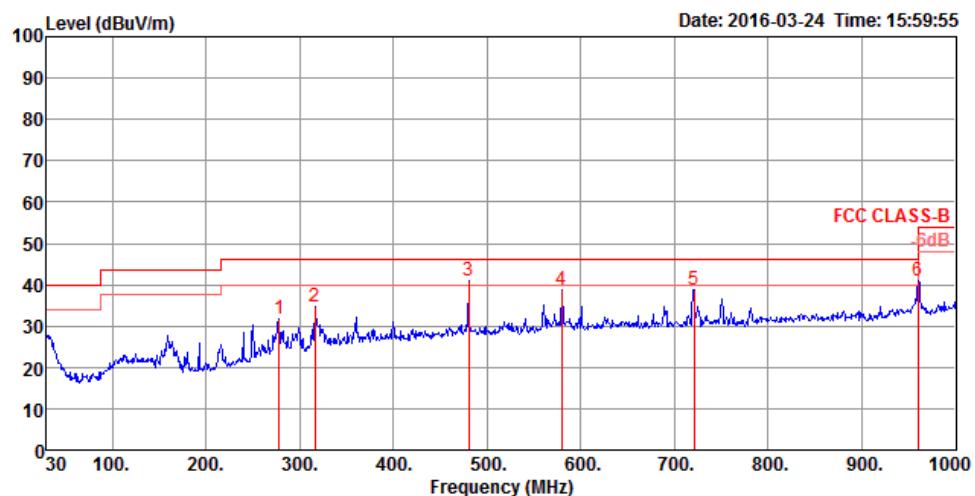

Freq	Level	Limit		Over Line	Read Limit	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	MHz	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg
1	278.32	31.72	46.00	-14.28	42.91	1.42	19.68	32.29	150	241	Peak	HORIZONTAL
2	316.15	34.67	46.00	-11.33	44.96	1.52	20.48	32.29	100	240	Peak	HORIZONTAL
3	480.08	41.12	46.00	-4.88	47.86	1.90	23.71	32.35	200	169	Peak	HORIZONTAL
4	579.99	38.74	46.00	-7.26	43.88	2.09	25.17	32.40	150	215	Peak	HORIZONTAL
5	720.64	38.77	46.00	-7.23	42.67	2.32	26.12	32.34	150	73	Peak	HORIZONTAL
6	960.23	40.91	54.00	-13.09	41.21	2.69	28.20	31.19	125	2	Peak	HORIZONTAL

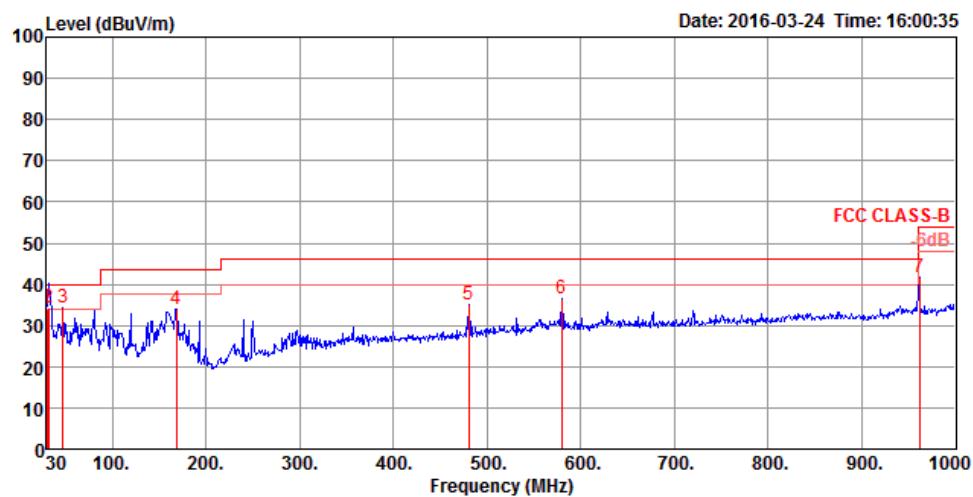Vertical


Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB	dB/m	dB	cm	deg	
1	30.00	33.83	40.00	-6.17	40.14	0.49	25.60	32.40	200	11	QP	VERTICAL
2	31.94	34.28	40.00	-5.72	41.52	0.50	24.66	32.40	200	11	QP	VERTICAL
3	47.46	34.43	40.00	-5.57	50.23	0.61	16.00	32.41	200	11	Peak	VERTICAL
4	168.71	34.13	43.50	-9.37	48.72	1.12	16.63	32.34	100	7	Peak	VERTICAL
5	480.08	35.17	46.00	-10.83	41.91	1.90	23.71	32.35	150	116	Peak	VERTICAL
6	579.99	36.56	46.00	-9.44	41.70	2.09	25.17	32.40	125	195	Peak	VERTICAL
7	961.20	41.57	54.00	-12.43	41.83	2.70	28.23	31.19	300	69	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11a CH 36 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15541.72	48.43	54.00	-5.57	32.27	13.26	38.25	35.35	170	167	Average	HORIZONTAL
2	15546.08	62.20	74.00	-11.80	46.04	13.26	38.25	35.35	170	167	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15531.28	48.21	54.00	-5.79	32.05	13.26	38.25	35.35	200	110	Average	VERTICAL
2	15542.44	61.61	74.00	-12.39	45.45	13.26	38.25	35.35	200	110	Peak	VERTICAL

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11a CH 40 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15590.24	48.21	54.00	-5.79	32.10	13.28	38.19	35.36	153	163	Average	HORIZONTAL	
2	15597.20	60.93	74.00	-13.07	44.82	13.28	38.19	35.36	153	163	Peak	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15591.24	47.87	54.00	-6.13	31.76	13.28	38.19	35.36	186	219	Average	VERTICAL	
2	15607.84	61.50	74.00	-12.50	45.41	13.31	38.14	35.36	186	219	Peak	VERTICAL	

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11a CH 48 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB			dB	dB		
MHz	dBuV/m	dBuV/m	dB							cm	deg		
1	15624.80	47.43	54.00	-6.57	31.34	13.31	38.14	35.36	162	207	Average	HORIZONTAL	
2	15678.00	60.47	74.00	-13.53	44.43	13.33	38.08	35.37	162	207	Peak	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB			dB	dB		
MHz	dBuV/m	dBuV/m	dB							cm	deg		
1	15623.60	47.80	54.00	-6.20	31.71	13.31	38.14	35.36	182	278	Average	VERTICAL	
2	15639.60	60.18	74.00	-13.82	44.09	13.31	38.14	35.36	182	278	Peak	VERTICAL	



Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11a CH 149 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m	dB	cm	
1	11397.20	58.47	74.00	-15.53	42.12	11.53	40.04	35.22	195	115	Peak	HORIZONTAL
2	11491.60	45.43	54.00	-8.57	29.06	11.60	40.00	35.23	195	115	Average	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV/m	dBuV	dB	dB/m	dB	cm	
1	11491.60	46.83	54.00	-7.17	30.46	11.60	40.00	35.23	221	357	Average	VERTICAL
2	11498.80	59.19	74.00	-14.81	42.82	11.60	40.00	35.23	221	357	Peak	VERTICAL

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11a CH 157 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11495.20	58.22	74.00	-15.78	41.85	11.60	40.00	35.23	151	266	Peak	HORIZONTAL
2	11571.60	45.27	54.00	-8.73	28.99	11.64	39.87	35.23	151	266	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11562.40	58.77	74.00	-15.23	42.49	11.64	39.87	35.23	204	353	Peak	VERTICAL
2	11568.00	46.75	54.00	-7.25	30.47	11.64	39.87	35.23	204	353	Average	VERTICAL

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11a CH 165 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11701.20	44.80	54.00	-9.20	28.69	11.73	39.60	35.22	150	214	Average	HORIZONTAL	
2	11749.60	57.96	74.00	-16.04	41.88	11.76	39.53	35.21	150	214	Peak	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11651.20	45.31	54.00	-8.69	29.15	11.71	39.67	35.22	171	229	Average	VERTICAL	
2	11651.20	55.63	74.00	-18.37	39.47	11.71	39.67	35.22	171	229	Peak	VERTICAL	

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB			dB	dB		
1	15470.00	60.77	74.00	-13.23	44.57	13.24	38.30	35.34	143	160	Peak		HORIZONTAL
2	15505.20	48.45	54.00	-5.55	32.25	13.24	38.30	35.34	143	160	Average		HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB			dB	dB		
1	15495.20	61.61	74.00	-12.39	45.41	13.24	38.30	35.34	117	192	Peak		VERTICAL
2	15502.40	48.50	54.00	-5.50	32.30	13.24	38.30	35.34	117	192	Average		VERTICAL

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			dB	dB/m	dB	cm
1	15624.80	47.36	54.00	-6.64	31.27	13.31	38.14	35.36	154	166	Average	HORIZONTAL	
2	15653.60	59.66	74.00	-14.34	43.61	13.33	38.08	35.36	154	166	Peak	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			dB	dB/m	dB	cm
1	15629.60	47.33	54.00	-6.67	31.24	13.31	38.14	35.36	176	102	Average	VERTICAL	
2	15785.20	59.69	74.00	-14.31	43.77	13.39	37.92	35.39	176	102	Peak	VERTICAL	

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15718.00	60.45	74.00	-13.55	44.45	13.35	38.03	35.38	165	154	Peak	HORIZONTAL
2	15728.36	46.72	54.00	-7.28	30.72	13.35	38.03	35.38	165	154	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15710.76	46.82	54.00	-7.18	30.81	13.35	38.03	35.37	192	216	Average	VERTICAL
2	15723.44	60.51	74.00	-13.49	44.51	13.35	38.03	35.38	192	216	Peak	VERTICAL

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB			dB	cm	deg	
MHz	dBuV/m	dBuV/m	dB										
1	11497.40	44.79	54.00	-9.21	28.42	11.60	40.00	35.23	169	162	Average	HORIZONTAL	
2	11498.16	57.80	74.00	-16.20	41.43	11.60	40.00	35.23	169	162	Peak	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB			dB	cm	deg	
MHz	dBuV/m	dBuV/m	dB										
1	11488.96	44.73	54.00	-9.27	28.36	11.60	40.00	35.23	182	187	Average	VERTICAL	
2	11493.04	58.36	74.00	-15.64	41.99	11.60	40.00	35.23	182	187	Peak	VERTICAL	

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m	dB	cm	deg	
1	11563.36	57.65	74.00	-16.35	41.37	11.64	39.87	35.23	189	169	Peak	HORIZONTAL
2	11579.08	44.61	54.00	-9.39	28.33	11.64	39.87	35.23	189	169	Average	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB/m	dB	cm	deg	
1	11562.28	57.85	74.00	-16.15	41.57	11.64	39.87	35.23	153	192	Peak	VERTICAL
2	11566.40	44.74	54.00	-9.26	28.46	11.64	39.87	35.23	153	192	Average	VERTICAL

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11645.80	57.51	74.00	-16.49	41.31	11.69	39.73	35.22	131	198	Peak	HORIZONTAL
2	11651.88	44.51	54.00	-9.49	28.35	11.71	39.67	35.22	131	198	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11641.56	58.63	74.00	-15.37	42.43	11.69	39.73	35.22	147	199	Peak	VERTICAL
2	11650.00	45.14	54.00	-8.86	28.94	11.69	39.73	35.22	147	199	Average	VERTICAL

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15572.48	47.77	54.00	-6.23	31.66	13.28	38.19	35.36	174	158 Average	HORIZONTAL
2	15580.00	60.66	74.00	-13.34	44.55	13.28	38.19	35.36	174	158 Peak	HORIZONTAL

Vertical

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15563.00	47.87	54.00	-6.13	31.76	13.28	38.19	35.36	144	225 Average	VERTICAL
2	15565.92	60.98	74.00	-13.02	44.87	13.28	38.19	35.36	144	225 Peak	VERTICAL

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15683.72	60.52	74.00	-13.48	44.48	13.33	38.08	35.37	148	216	Peak	HORIZONTAL
2	15684.12	46.81	54.00	-7.19	30.77	13.33	38.08	35.37	148	216	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15683.44	47.14	54.00	-6.86	31.10	13.33	38.08	35.37	134	270	Average	VERTICAL
2	15694.68	59.98	74.00	-14.02	43.97	13.35	38.03	35.37	134	270	Peak	VERTICAL

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11519.44	45.00	54.00	-9.00	28.68	11.62	39.93	35.23	126	202	Average	HORIZONTAL	
2	11519.44	54.84	74.00	-19.16	38.52	11.62	39.93	35.23	126	202	Peak	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11500.84	45.03	54.00	-8.97	28.66	11.60	40.00	35.23	168	142	Average	VERTICAL	
2	11500.84	54.22	74.00	-19.78	37.85	11.60	40.00	35.23	168	142	Peak	VERTICAL	

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11587.28	44.41	54.00	-9.59	28.16	11.67	39.80	35.22	122	148	Average	HORIZONTAL	
2	11592.28	57.19	74.00	-16.81	40.94	11.67	39.80	35.22	122	148	Peak	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11588.12	44.42	54.00	-9.58	28.17	11.67	39.80	35.22	170	125	Average	VERTICAL	
2	11588.12	55.36	74.00	-18.64	39.11	11.67	39.80	35.22	170	125	Peak	VERTICAL	

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15625.60	47.18	54.00	-6.82	31.09	13.31	38.14	35.36	138	98	Average	HORIZONTAL	
2	15634.60	59.91	74.00	-14.09	43.82	13.31	38.14	35.36	138	98	Peak	HORIZONTAL	

Vertical

Freq	Level	Limit		Over Line	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15623.24	47.11	54.00	-6.89	31.02	13.31	38.14	35.36	200	128	Average	VERTICAL	
2	15628.92	60.69	74.00	-13.31	44.60	13.31	38.14	35.36	200	128	Peak	VERTICAL	

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Horizontal

Freq	Level	Limit		Read Level	Cable Loss		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Over Limit		dB	dBuV			dB	dB/m		
1	11541.88	44.93	54.00	-9.07	28.61	11.62	39.93	35.23	231	163	Average	HORIZONTAL
2	11551.60	57.59	74.00	-16.41	41.31	11.64	39.87	35.23	231	163	Peak	HORIZONTAL

Vertical

Freq	Level	Limit		Read Level	Cable Loss		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Over Limit		dB	dBuV			dB	dB/m		
1	11554.48	57.32	74.00	-16.68	41.04	11.64	39.87	35.23	153	256	Peak	VERTICAL
2	11556.16	44.85	54.00	-9.15	28.57	11.64	39.87	35.23	153	256	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for Peak

4.7.3. Test Procedures

The test procedure is the same as section 4.6.3.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in beamforming transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11a CH 36, 40, 48 / Ant. 1 + Ant. 2
Test Date	Apr. 07, 2016 / Apr. 08, 2016		

Channel 36

Freq	Level	Limit		Over Limit	Read Level	Cable			A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			Loss	Antenna Factor	Preamp Factor				
1	5149.60	53.69	54.00	-0.31	42.57	10.43	33.74	33.05	101	229	Average	VERTICAL
2	5150.00	66.33	74.00	-7.67	55.21	10.43	33.74	33.05	101	229	Peak	VERTICAL
3	5181.20	110.88			99.68	10.46	33.79	33.05	101	229	Average	VERTICAL
4	5181.40	120.77			109.57	10.46	33.79	33.05	101	229	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

Freq	Level	Limit		Over Limit	Read Level	Cable			A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			Loss	Antenna Factor	Preamp Factor				
1	5146.80	68.82	74.00	-5.18	57.70	10.43	33.74	33.05	146	245	Peak	VERTICAL
2	5150.00	53.80	54.00	-0.20	42.68	10.43	33.74	33.05	146	245	Average	VERTICAL
3	5198.00	122.56			111.31	10.48	33.82	33.05	146	245	Peak	VERTICAL
4	5199.20	113.42			102.17	10.48	33.82	33.05	146	245	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

Freq	Level	Limit		Over Limit	Read Level	Cable			A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			Loss	Antenna Factor	Preamp Factor				
1	5129.00	63.41	74.00	-10.59	52.32	10.42	33.72	33.05	102	146	Peak	VERTICAL
2	5145.20	52.47	54.00	-1.53	41.35	10.43	33.74	33.05	102	146	Average	VERTICAL
3	5235.20	123.67			112.36	10.47	33.89	33.05	102	146	Peak	VERTICAL
4	5238.80	114.56			103.25	10.47	33.89	33.05	102	146	Average	VERTICAL
5	5355.80	62.58	74.00	-11.42	51.13	10.43	34.08	33.06	102	146	Peak	VERTICAL
6	5361.80	51.01	54.00	-2.99	39.56	10.43	34.08	33.06	102	146	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11a CH 149, 157, 165 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Channel 149

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			cm	deg		
1	5714.40	65.17	68.20	-3.03	57.04	7.70	32.06	31.63	225	237	Peak	VERTICAL	
2	5725.00	77.79	78.20	-0.41	69.63	7.71	32.08	31.63	225	237	Peak	VERTICAL	
3	5746.00	109.80			101.60	7.73	32.10	31.63	225	237	Average	VERTICAL	
4	5746.40	119.72			111.52	7.73	32.10	31.63	225	237	Peak	VERTICAL	

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			cm	deg		
1	5714.20	67.92	68.20	-0.28	59.79	7.70	32.06	31.63	286	145	Peak	VERTICAL	
2	5723.80	70.03	78.20	-8.17	61.87	7.71	32.08	31.63	286	145	Peak	VERTICAL	
3	5785.60	115.62			107.35	7.76	32.14	31.63	286	145	Average	VERTICAL	
4	5785.60	125.32			117.05	7.76	32.14	31.63	286	145	Peak	VERTICAL	
5	5850.00	66.19	78.20	-12.01	57.81	7.79	32.22	31.63	286	145	Peak	VERTICAL	
6	5893.00	64.64	68.20	-3.56	56.17	7.81	32.28	31.62	286	145	Peak	VERTICAL	

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			cm	deg		
1	5820.20	120.92			112.59	7.78	32.18	31.63	234	273	Peak	VERTICAL	
2	5824.20	110.47			102.12	7.78	32.20	31.63	234	273	Average	VERTICAL	
3	5852.20	73.44	78.20	-4.76	65.06	7.79	32.22	31.63	234	273	Peak	VERTICAL	
4	5861.80	67.99	68.20	-0.21	59.59	7.79	32.24	31.63	234	273	Peak	VERTICAL	

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Channel 36

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	5150.00	53.55	54.00	-0.45	42.43	10.43	33.74	33.05	154	246	Average	VERTICAL
2	5150.00	67.28	74.00	-6.72	56.16	10.43	33.74	33.05	154	246	Peak	VERTICAL
3	5178.40	106.71			95.51	10.46	33.79	33.05	154	246	Average	VERTICAL
4	5178.80	116.28			105.08	10.46	33.79	33.05	154	246	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	5149.60	69.64	74.00	-4.36	58.52	10.43	33.74	33.05	116	130	Peak	VERTICAL
2	5150.00	53.77	54.00	-0.23	42.65	10.43	33.74	33.05	116	130	Average	VERTICAL
3	5198.80	114.05			102.80	10.48	33.82	33.05	116	130	Average	VERTICAL
4	5199.20	123.10			111.85	10.48	33.82	33.05	116	130	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	5101.40	62.57	74.00	-11.43	51.57	10.38	33.67	33.05	142	127	Peak	VERTICAL
2	5148.20	51.42	54.00	-2.58	40.30	10.43	33.74	33.05	142	127	Average	VERTICAL
3	5241.20	121.24			109.93	10.47	33.89	33.05	142	127	Peak	VERTICAL
4	5241.80	111.79			100.49	10.47	33.89	33.06	142	127	Average	VERTICAL
5	5355.80	50.50	54.00	-3.50	39.05	10.43	34.08	33.06	142	127	Average	VERTICAL
6	5387.00	62.17	74.00	-11.83	50.68	10.42	34.13	33.06	142	127	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149, 157, 165 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Channel 149

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	5714.60	66.49	68.20	-1.71	58.36	7.70	32.06	31.63	288	178	Peak	VERTICAL
2	5725.00	77.95	78.20	-0.25	69.79	7.71	32.08	31.63	288	178	Peak	VERTICAL
3	5743.80	106.22			98.02	7.73	32.10	31.63	288	178	Average	VERTICAL
4	5744.20	116.11			107.91	7.73	32.10	31.63	288	178	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	5693.40	65.07	68.20	-3.13	56.98	7.68	32.04	31.63	140	232	Peak	VERTICAL
2	5725.00	69.61	78.20	-8.59	61.45	7.71	32.08	31.63	140	232	Peak	VERTICAL
3	5782.20	121.38			113.11	7.76	32.14	31.63	140	232	Peak	VERTICAL
4	5782.60	110.38			102.11	7.76	32.14	31.63	140	232	Average	VERTICAL
5	5850.60	70.53	78.20	-7.67	62.15	7.79	32.22	31.63	140	232	Peak	VERTICAL
6	5869.40	64.35	68.20	-3.85	55.95	7.79	32.24	31.63	140	232	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	5825.40	109.10			100.75	7.78	32.20	31.63	205	239	Average	VERTICAL
2	5826.60	118.96			110.61	7.78	32.20	31.63	205	239	Peak	VERTICAL
3	5850.00	76.97	78.20	-1.23	68.59	7.79	32.22	31.63	205	239	Peak	VERTICAL
4	5862.60	68.04	68.20	-0.16	59.64	7.79	32.24	31.63	205	239	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Channel 38

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB							cm	deg		
1	5147.20	53.77	54.00	-0.23	42.65	10.43	33.74	33.05	144	266	Average	VERTICAL	
2	5148.00	67.06	74.00	-6.94	55.94	10.43	33.74	33.05	144	266	Peak	VERTICAL	
3	5184.40	110.65			99.45	10.46	33.79	33.05	144	266	Peak	VERTICAL	
4	5188.80	101.35			90.10	10.48	33.82	33.05	144	266	Average	VERTICAL	

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB							cm	deg		
1	5148.80	71.63	74.00	-2.37	60.51	10.43	33.74	33.05	149	101	Peak	VERTICAL	
2	5150.00	53.74	54.00	-0.26	42.62	10.43	33.74	33.05	149	101	Average	VERTICAL	
3	5226.40	117.76			106.48	10.47	33.86	33.05	149	101	Peak	VERTICAL	
4	5228.80	108.29			97.01	10.47	33.86	33.05	149	101	Average	VERTICAL	

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151, 159 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016		

Channel 151

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB			cm	deg		
1	5695.80	67.81	68.20	-0.39	59.72	7.68	32.04	31.63	229	142	Average	VERTICAL	
2	5724.60	70.43	78.20	-7.77	62.27	7.71	32.08	31.63	229	142	Average	VERTICAL	
3	5753.40	103.70			95.50	7.73	32.10	31.63	229	142	Peak	VERTICAL	
4	5757.40	113.82			105.59	7.74	32.12	31.63	229	142	Average	VERTICAL	

Item 3, 4 are the fundamental frequency at 5755 MHz.

Channel 159

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB			cm	deg		
1	5713.40	67.54	68.20	-0.66	59.41	7.70	32.06	31.63	247	268	Peak	VERTICAL	
2	5724.60	67.97	78.20	-10.23	59.81	7.71	32.08	31.63	247	268	Peak	VERTICAL	
3	5793.40	108.09			99.79	7.77	32.16	31.63	247	268	Average	VERTICAL	
4	5797.00	117.97			109.67	7.77	32.16	31.63	247	268	Peak	VERTICAL	
5	5852.60	71.95	78.20	-6.25	63.57	7.79	32.22	31.63	247	268	Peak	VERTICAL	
6	5863.40	68.16	68.20	-0.04	59.76	7.79	32.24	31.63	247	268	Peak	VERTICAL	

Item 3, 4 are the fundamental frequency at 5795 MHz.

Temperature	20.4°C	Humidity	52%
Test Engineer	Charlie Cheng / Gary Chu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42, 155 / Ant. 1 + Ant. 2
Test Date	Apr. 08, 2016 / Apr. 14, 2016		

Channel 42

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5101.00	53.86	54.00	-0.14	42.86	10.38	33.67	33.05	215	247	Average
2	5101.00	65.23	74.00	-8.77	54.23	10.38	33.67	33.05	215	247	Peak
3	5203.00	103.12			91.85	10.48	33.84	33.05	215	247	Peak
4	5204.00	93.87			82.60	10.48	33.84	33.05	215	247	Average
5	5432.00	63.17	74.00	-10.83	51.56	10.49	34.18	33.06	215	247	Peak
6	5458.00	51.53	54.00	-2.47	39.80	10.56	34.23	33.06	215	247	Average

Item 4, 5 are the fundamental frequency at 5210 MHz.

Channel 155

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5666.00	67.91	68.20	-0.29	59.88	7.66	32.00	31.63	248	270	Peak
2	5720.00	70.12	78.20	-8.08	61.99	7.70	32.06	31.63	248	270	Peak
3	5772.00	96.60			88.33	7.76	32.14	31.63	248	270	Average
4	5777.00	110.76			102.49	7.76	32.14	31.63	248	270	Peak
5	5850.00	65.89	78.20	-12.31	57.51	7.79	32.22	31.63	248	270	Peak
6	5860.00	66.00	68.20	-2.20	57.60	7.79	32.24	31.63	248	270	Peak

Item 4, 5 are the fundamental frequency at 5775 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c-f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is $0^\circ\text{C} \sim 40^\circ\text{C}$.

4.8.4. Test Setup Layout

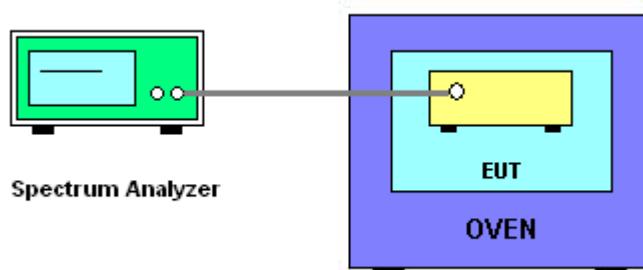

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Temperature	20°C	Humidity	61%
Test Engineer	Peter Wu / Taka Hsu	Test Date	Apr. 13, 2016

Mode: 20 MHz / Ant. 2

Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5200.0002	5199.9993	5199.9985	5199.9978
110.00	5199.9994	5199.9987	5199.9977	5199.9968
93.50	5199.9985	5199.9976	5199.9973	5199.9965
Max. Deviation (MHz)	0.0015	0.0024	0.0027	0.0035
Max. Deviation (ppm)	0.29	0.46	0.52	0.67
Result	Complies			

Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5199.9950	5199.9938	5199.9919	5199.9897
10	5199.9937	5199.9924	5199.9909	5199.9891
20	5199.9925	5199.9912	5199.9896	5199.9877
30	5199.9911	5199.9900	5199.9886	5199.9870
40	5199.9895	5199.9880	5199.9864	5199.9844
Max. Deviation (MHz)	0.0122	0.0134	0.0149	0.0176
Max. Deviation (ppm)	2.35	2.58	2.87	3.38
Result	Complies			

Voltage vs. Frequency Stability

Voltage		Measurement Frequency (MHz)			
(V)		5785 MHz			
		0 Minute	2 Minute	5 Minute	10 Minute
126.50	5784.9919	5784.9913	5784.9903	5784.9897	
110.00	5784.9917	5784.9914	5784.9911	5784.9904	
93.50	5784.9910	5784.9903	5784.9898	5784.9892	
Max. Deviation (MHz)	0.0090	0.0097	0.0102	0.0108	
Max. Deviation (ppm)	1.56	1.68	1.76	1.87	
Result	Complies				

Temperature vs. Frequency Stability

Temperature		Measurement Frequency (MHz)			
($^{\circ}$ C)		5785 MHz			
		0 Minute	2 Minute	5 Minute	10 Minute
0	5785.0022	5785.0010	5784.9991	5784.9969	
10	5785.0009	5784.9996	5784.9981	5784.9963	
20	5784.9997	5784.9984	5784.9968	5784.9949	
30	5784.9983	5784.9972	5784.9958	5784.9942	
40	5784.9967	5784.9952	5784.9936	5784.9916	
Max. Deviation (MHz)	0.0067	0.0062	0.0077	0.0104	
Max. Deviation (ppm)	1.16	1.07	1.33	1.80	
Result	Complies				

Mode: 40 MHz / Ant. 2
Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5189.9970	5189.9968	5189.9965	5189.9955
110.00	5189.9961	5189.9957	5189.9950	5189.9947
93.50	5189.9959	5189.9950	5189.9948	5189.9944
Max. Deviation (MHz)	0.0041	0.0050	0.0052	0.0056
Max. Deviation (ppm)	0.79	0.96	1.00	1.08
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
($^{\circ}$ C)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5189.9984	5189.9972	5189.9953	5189.9931
10	5189.9971	5189.9958	5189.9943	5189.9925
20	5189.9959	5189.9946	5189.9930	5189.9911
30	5189.9945	5189.9934	5189.9920	5189.9904
40	5189.9929	5189.9914	5189.9898	5189.9878
Max. Deviation (MHz)	0.0088	0.0100	0.0115	0.0142
Max. Deviation (ppm)	1.70	1.93	2.22	2.74
Result	Complies			

Voltage vs. Frequency Stability

Voltage		Measurement Frequency (MHz)			
(V)		5755 MHz			
		0 Minute	2 Minute	5 Minute	10 Minute
126.50	5754.9928	5754.9918	5754.9910	5754.9905	
110.00	5754.9919	5754.9914	5754.9912	5754.9908	
93.50	5754.9912	5754.9904	5754.9897	5754.9888	
Max. Deviation (MHz)	0.0088	0.0096	0.0103	0.0112	
Max. Deviation (ppm)	1.53	1.67	1.79	1.95	
Result	Complies				

Temperature vs. Frequency Stability

Temperature		Measurement Frequency (MHz)			
($^{\circ}$ C)		5755 MHz			
		0 Minute	2 Minute	5 Minute	10 Minute
0	5754.9946	5754.9934	5754.9915	5754.9893	
10	5754.9933	5754.9920	5754.9905	5754.9887	
20	5754.9921	5754.9908	5754.9892	5754.9873	
30	5754.9907	5754.9896	5754.9882	5754.9866	
40	5754.9891	5754.9876	5754.9860	5754.9840	
Max. Deviation (MHz)	0.0126	0.0138	0.0153	0.0180	
Max. Deviation (ppm)	2.19	2.40	2.66	3.13	
Result	Complies				

Mode: 80 MHz / Ant. 2
Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5209.9929	5209.9922	5209.9913	5209.9912
110.00	5209.9922	5209.9921	5209.9914	5209.9904
93.50	5209.9917	5209.9912	5209.9904	5209.9896
Max. Deviation (MHz)	0.0083	0.0088	0.0096	0.0104
Max. Deviation (ppm)	1.59	1.69	1.84	2.00
Result	Complies			

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
($^{\circ}$ C)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
0	5209.9932	5209.9920	5209.9901	5209.9879
10	5209.9919	5209.9906	5209.9891	5209.9873
20	5209.9907	5209.9894	5209.9878	5209.9859
30	5209.9893	5209.9882	5209.9868	5209.9852
40	5209.9877	5209.9862	5209.9846	5209.9826
Max. Deviation (MHz)	0.0140	0.0152	0.0167	0.0194
Max. Deviation (ppm)	2.69	2.92	3.21	3.72
Result	Complies			

Voltage vs. Frequency Stability

Voltage		Measurement Frequency (MHz)			
(V)		5775 MHz			
		0 Minute	2 Minute	5 Minute	10 Minute
126.50	5774.9971	5774.9966	5774.9957	5774.9949	
110.00	5774.9964	5774.9962	5774.9952	5774.9943	
93.50	5774.9957	5774.9952	5774.9946	5774.9936	
Max. Deviation (MHz)	0.0043	0.0048	0.0054	0.0064	
Max. Deviation (ppm)	0.74	0.83	0.94	1.11	
Result	Complies				

Temperature vs. Frequency Stability

Temperature		Measurement Frequency (MHz)			
($^{\circ}$ C)		5775 MHz			
		0 Minute	2 Minute	5 Minute	10 Minute
0	5774.9925	5774.9913	5774.9894	5774.9872	
10	5774.9912	5774.9899	5774.9884	5774.9866	
20	5774.9900	5774.9887	5774.9871	5774.9852	
30	5774.9886	5774.9875	5774.9861	5774.9845	
40	5774.9870	5774.9855	5774.9839	5774.9819	
Max. Deviation (MHz)	0.0147	0.0159	0.0174	0.0201	
Max. Deviation (ppm)	2.55	2.75	3.01	3.48	
Result	Complies				

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 25, 2015	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 27, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-I0-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%