

FCC RADIO TEST REPORT

Applicant's company	Linksys LLC
Applicant Address	131 Theory Drive, Irvine, CA 92617, USA
FCC ID	Q87-EA6200

Product Name	Linksys, EA6200, Smart Wi-Fi Router AC900
Brand Name	Linksys
Model Name	EA6200
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Nov. 16, 2012
Final Test Date	May 17, 2013
Submission Type	Original Equipment



Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac (5150 ~ 5250MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009**,

47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03 and KDB 662911 D01 v01r02.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

Table of Contents

1. CERTIFICATE OF COMPLIANCE.....	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION.....	3
3.1. Product Details	3
3.2. Accessories	6
3.3. Table for Filed Antenna	7
3.4. Table for Carrier Frequencies	8
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	10
3.7. Table for Supporting Units	10
3.8. Table for Parameters of Test Software Setting	11
3.9. EUT Operation during Test.....	11
3.10. Duty Cycle.....	12
3.11. Test Configurations.....	15
4. TEST RESULT.....	18
4.1. AC Power Line Conducted Emissions Measurement	18
4.2. 26dB Bandwidth & 99% Occupied Bandwidth Measurement.....	30
4.3. Maximum Conducted Output Power Measurement.....	41
4.4. Power Spectral Density Measurement.....	45
4.5. Peak Excursion Measurement	53
4.6. Radiated Emissions Measurement.....	58
4.7. Band Edge Emissions Measurement.....	81
4.8. Frequency Stability Measurement.....	89
4.9. Antenna Requirements	91
5. LIST OF MEASURING EQUIPMENTS	92
6. TEST LOCATION.....	95
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A24
APPENDIX B. TEST PHOTOS	B1 ~ B5
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE	C1 ~ C3
APPENDIX D. CO-LOCATION REPORT.....	D1 ~ D3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2N1647-01AB	Rev. 01	Initial issue of report	May 20 ,2013



1. CERTIFICATE OF COMPLIANCE

Product Name : Linksys, EA6200, Smart Wi-Fi Router AC900
Brand Name : Linksys
Model Name : EA6200
Applicant : Linksys LLC
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 16, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read 'Sam Chen', is written over a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.85 dB
4.2	15.407(a)	26dB Spectrum Bandwidth & 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.04 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.01 dB
4.5	15.407(a)	Peak Excursion	Complies	2.84 dB
4.6	15.407(b)	Radiated Emissions	Complies	6.03 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.46 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n/ac

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	see the below table for IEEE 802.11n see the below table for IEEE 802.11ac
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11n OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) for 802.11ac
Data Rate (Mbps)	see the below table for IEEE 802.11n see the below table for IEEE 802.11ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	11n: MCS0 (20MHz): 17.76 MHz ; MCS0 (40MHz): 36.48 MHz 11ac : MCS0 (20MHz): 17.60 MHz ; MCS0 (40MHz): 36.48 MHz MCS0 (80MHz): 76.16 MHz
Maximum Conducted Output Power	11n: MCS0 (20MHz): 15.22 dBm ; MCS0 (40MHz): 16.95 dBm 11ac : MCS0 (20MHz): 15.24 dBm ; MCS0 (40MHz): 16.92 dBm MCS0 (80MHz): 16.96 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11a

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Power Adapter
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	11a: 4
Channel Band Width (99%)	11a: 16.48 MHz
Maximum Conducted Output Power	11a: 14.58 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Single (TX)	Two (TX)		
Band width Mode	20 MHz	20 MHz	40 MHz	80 MHz
IEEE 802.11a	X	V	X	X
IEEE 802.11b	V	X	X	X
IEEE 802.11g	X	V	X	X
IEEE 802.11n	X	V	V	X
IEEE 802.11ac	X	V	V	V

IEEE 802.11n spec

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Datarate(Mbps)			
									800nsGI		400nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

IEEE 802. 11a, 11n and 11ac Spec.

Worst Modulation Used for Conformance Testing				
IEEE 802.11 Protocol	Number of Transmit Chains (N _{TX})	Data Rate / MCS	Worst Data Rate / MCS	Worst Modulation Mode
a	2	6-54 Mbps	6Mbps	11A5.2G-20M
n (HT20)	2	MCS 0-15	MCS 0	11N5.2G-20M
n (HT40)	2	MCS 0-15	MCS 0	11N5.2G-40M
ac (VHT20)	2	MCS 0-9	MCS 0-Nss1	11AC5.2G-20M
ac (VHT40)	2	MCS 0-9	MCS 0-Nss1	11AC5.2G-40M
ac (VHT80)	2	MCS 0-9	MCS 0-Nss1	11AC5.2G-80M
Note 1: IEEE Std. 802.11-2007 modulation consists of IEEE Std. 802.11a-1999.				
Note 2: IEEE Std. 802.11n-2009 modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Worst modulation mode of Guard Interval (GI) is 400ns.				
Note 3: draft IEEE Std. 802.11ac-2012 modulation consists of VHT20, VHT40 and VHT80. Then EUT support VHT80. (VHT: Very High Throughput).				
Note 4: Modulation modes consist of 11A5.2G-20M, 11N5.2G-20M, 11N5.2G-40M, 11AC5.2G-20M, 11AC5.2G-40M, 11AC5.2G-80M.				
Note 5: 11A: IEEE 802.11a, 11N: IEEE 802.11n, 11AC: IEEE 802.11ac. 5.2G: 5.15-5.25 GHz band.				
Note 6: 20M/40M/80M: Channel Bandwidth 20MHz/40MHz/80MHz				

3.2. Accessories

Power	Brand	Model	Rating
Adapter 1 (Fixed plug)	APD	WA-24E12FU	INPUT: 100-240V~50-60Hz, 0.65A OUTPUT: 12V, 2A
Adapter 2 (Removable plug)	APD	WA-24E12	INPUT: 100-240V~50-60Hz, 0.65A OUTPUT: 12V, 2A
Adapter 3 (Fixed plug)	HON-KWANG	HK-AX-120A200-US	INPUT: 100-240V~50/60Hz, 0.8A OUTPUT: 12V, 2.0A
Adapter 4 (Removable plug)	HON-KWANG	HK-AX-120A200-CP	INPUT: 100-240V~50/60Hz, 0.8A OUTPUT: 12V, 2.0A
Adapter 5 (Fixed plug)	SOLYTECH	CAD2412 (Part No.: CAD2412C)	INPUT: 100-240V~1.0A, 50-60Hz OUTPUT: 12V, 2.0A Max. 24W
Adapter 6 (Fixed plug)	LEI	MU24-S120200-A1	INPUT: 100-240V~50/60Hz, 0.6A OUTPUT: 12V, 2.0A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)		Remark
					2.4GHz	5GHz	
0	Galtronics	-	PIFA Antenna	I-PEX	2.62	-	TX/RX
1	Galtronics	-	PIFA Antenna	I-PEX	4.32	-	TX/RX
2	Galtronics	-	PIFA Antenna	I-PEX	-	5.47	TX/RX
3	Galtronics	-	PIFA Antenna	I-PEX	-	4.84	TX/RX

Note: The EUT has four antennas.

For 2.4GHz:

For IEEE 802.11b mode (1TX/2RX):

Only Ant. 0 can be used as transmitting antenna.

Ant. 0 and Ant. 1 could receive simultaneously.

For IEEE 802.11g/n mode (2TX/2RX):

Ant. 0 and Ant. 1 could transmit/receive the signal simultaneously.

For 5GHz:

For IEEE 802.11n mode (2TX/2RX):


Ant. 2 and Ant. 3 could transmit/receive the signal simultaneously.

For IEEE 802.11a mode (2TX/2RX):

Ant. 2 and Ant. 3 could transmit/receive the signal simultaneously.

For IEEE 802.11ac mode (2TX/2RX):

Ant. 2 and Ant. 3 could transmit/receive the signal simultaneously.

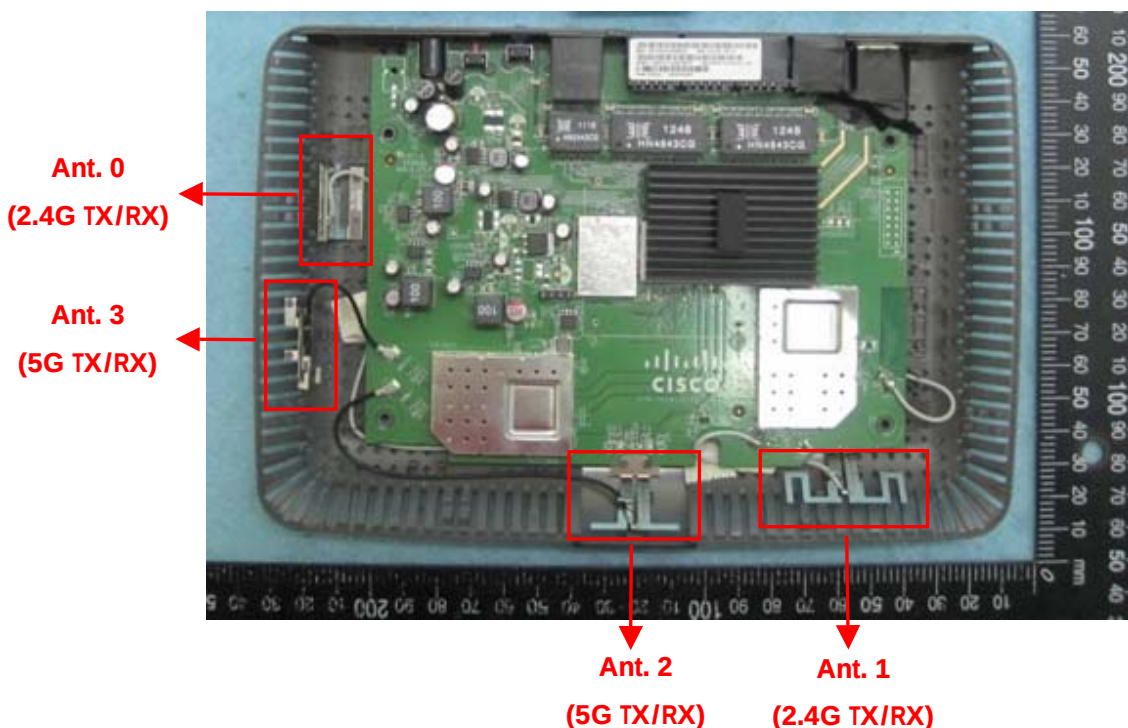

3.4. Table for Carrier Frequencies

The EUT has three bandwidth system.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal link		-	-	-
Max. Conducted Output Power	11n 20MHz	Band 1	MCS0	36/40/48	2+3
	11n 40MHz	Band 1	MCS0	38/46	2+3
	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	2+3
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	2+3
	11ac 80MHz	Band 1	MCS0/Nss1	42	2+3
	11a	Band 1	6 Mbps	36/40/48	2+3
Power Spectral Density	11n 20MHz	Band 1	MCS0	36/40/48	2/3
	11n 40MHz	Band 1	MCS0	38/46	2/3
	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	2/3
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	2/3
	11ac 80MHz	Band 1	MCS0/Nss1	42	2/3
	11a	Band 1	6 Mbps	36/40/48	2/3
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Peak Excursion	11n 20MHz	Band 1	MCS0	36/40/48	2+3
	11n 40MHz	Band 1	MCS0	38/46	2+3
	11ac 80MHz	Band 1	MCS0/Nss1	42	2+3
	11a	Band 1	6 Mbps	36/40/48	2+3
Radiated Emission Below 1GHz	Normal link		-	-	-
Radiated Emission Above 1GHz	11n 20MHz	Band 1	MCS0	36/40/48	2+3
	11n 40MHz	Band 1	MCS0	38/46	2+3

	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	2+3
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	2+3
	11ac 80MHz	Band 1	MCS0/Nss1	42	2+3
	11a	Band 1	6 Mbps	36/40/48	2+3
Band Edge Emission	11n 20MHz	Band 1	MCS0	36/40/48	2+3
	11n 40MHz	Band 1	MCS0	38/46	2+3
	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	2+3
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	2+3
	11ac 80MHz	Band 1	MCS0/Nss1	42	2+3
	11a	Band 1	6 Mbps	36/40/48	2+3
Frequency Stability	Un-modulation		-	40	N/A

The following test modes were performed for all tests:

For Conducted Emission and Radiated Emission test:

The difference among Adapter 1 and Adapter 2 is only different plug, only adapter 1 was selected to test and record in the report as a result.

Mode 1. Adapter 1(APD WA-24E12FU)

Mode 2. Adapter 2(HON-KWANG HK-AX-120A200-US)

Mode 3. Adapter 3(HON-KWANG HK-AX-120A200-CP)

Mode 4. Adapter 4(SOLYTECH CAD2412)

Mode 5. Adapter 5(LEI MU24-S120200-A1)

<For MPE and Co-location Test>:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Maximum Permissible Exposure (Please refer to Appendix C) and Co-location (please refer to Appendix D) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
USB Disk	WD	WDBACY5000AWT	DoC
Notebook	DELL	M1330	E2K4965AGNM
Notebook	DELL	E6220	QDS-BRCM1005-D
Notebook	DELL	E6220	QDS-BRCM1005-D
Notebook	DELL	1340	E2K4965AGNM

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of IEEE 802.11n MCS0 HT20MHz

Test Software Version	Manual Toov Version 1.0.0.10		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0 20MHz	46	47	45

Power Parameters of IEEE 802.11n MCS0 HT40MHz

Test Software Version	Manual Toov Version 1.0.0.10	
Frequency	5190 MHz	5230 MHz
MCS0 40MHz	53	53

Power Parameters of IEEE 802.11a

Test Software Version	Manual Toov Version 1.0.0.10		
Frequency	5180 MHz	5200 MHz	5240 MHz
11a	45	44	44

Power Parameters of IEEE 802.11ac MCS0 VHT 20MHz

Test Software Version	Manual Toov Version 1.0.0.10		
Frequency	5180 MHz	5200 MHz	5240 MHz
MCS0 20MHz	47	46	45

Power Parameters of IEEE 802.11ac MCS0 VHT 40MHz

Test Software Version	Manual Toov Version 1.0.0.10	
Frequency	5190 MHz	5230 MHz
MCS0 40MHz	53	53

Power Parameters of IEEE 802.11ac MCS0 VHT 80MHz


Test Software Version	Manual Toov Version 1.0.0.10
Frequency	5210 MHz
MCS0 80MHz	56

3.9. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


3.10. Duty Cycle

IEEE 802.11n MCS0 20MHz

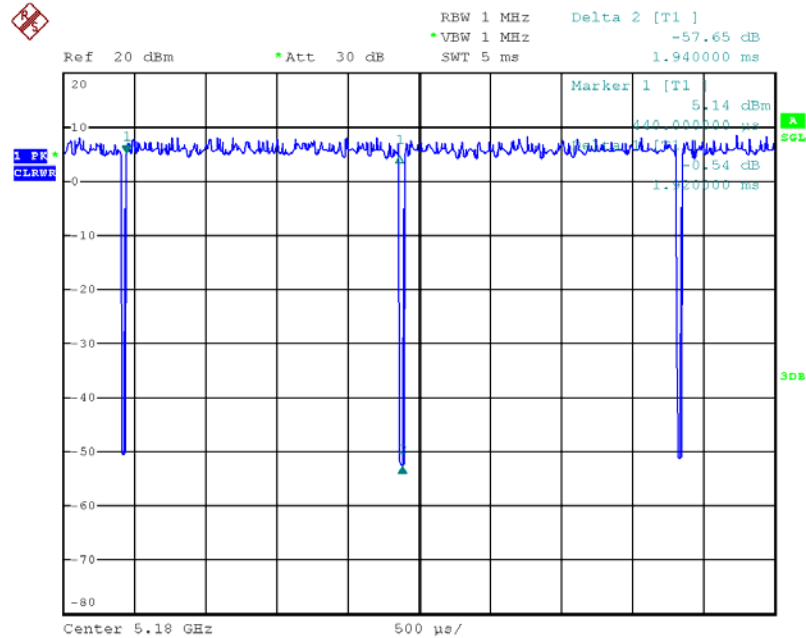


Date: 3.DEC.2012 22:58:02

IEEE 802.11n MCS0 40MHz

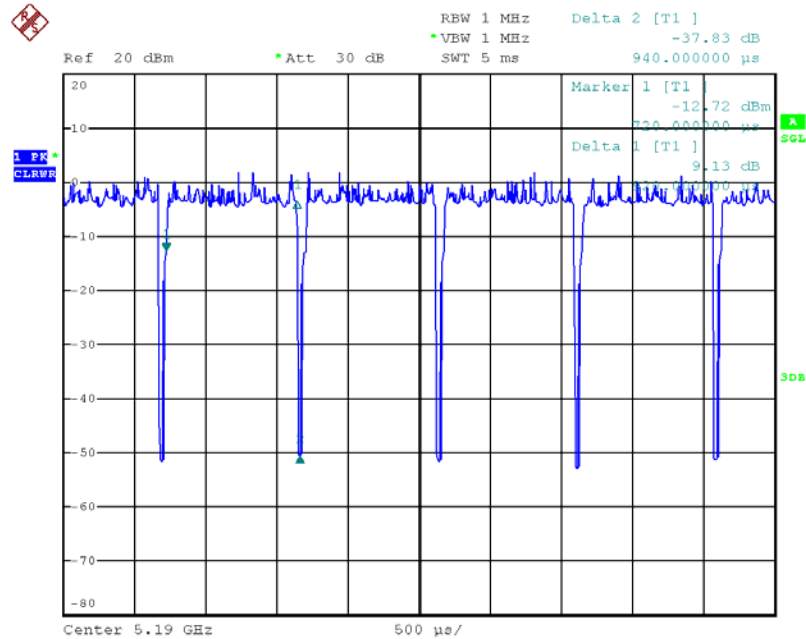


Date: 3.DEC.2012 22:58:47

IEEE 802.11ac MCS0/Nss1 20MHz

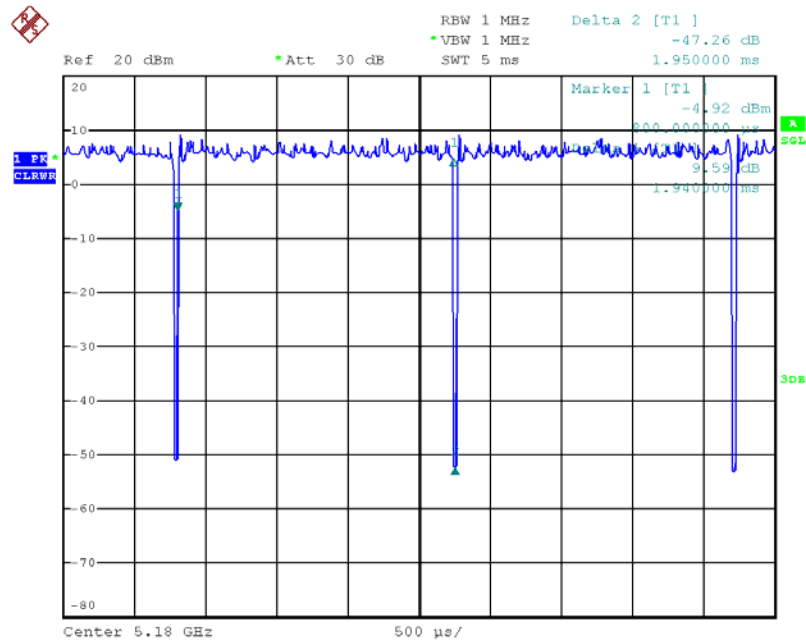


Date: 3.DEC.2012 23:00:13

IEEE 802.11ac MCS0/Nss1 40MHz

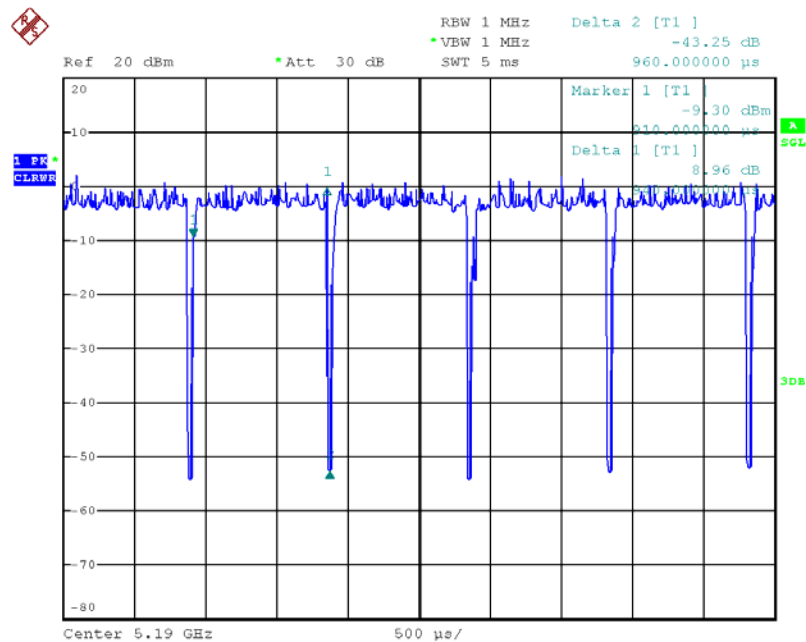


Date: 3.DEC.2012 22:59:30

IEEE 802.11ac MCS0/Nss1 80MHz

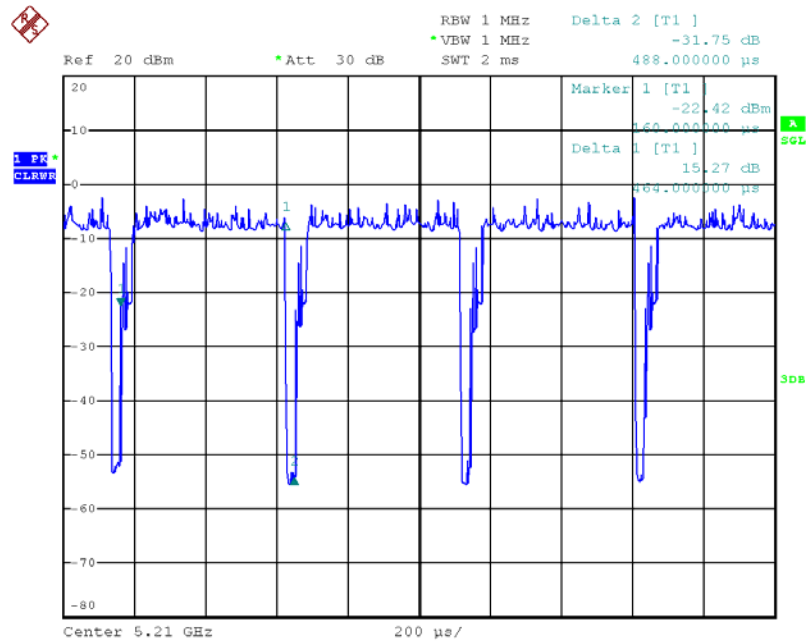

Date: 3.DEC.2012 23:01:16

IEEE 802.11a

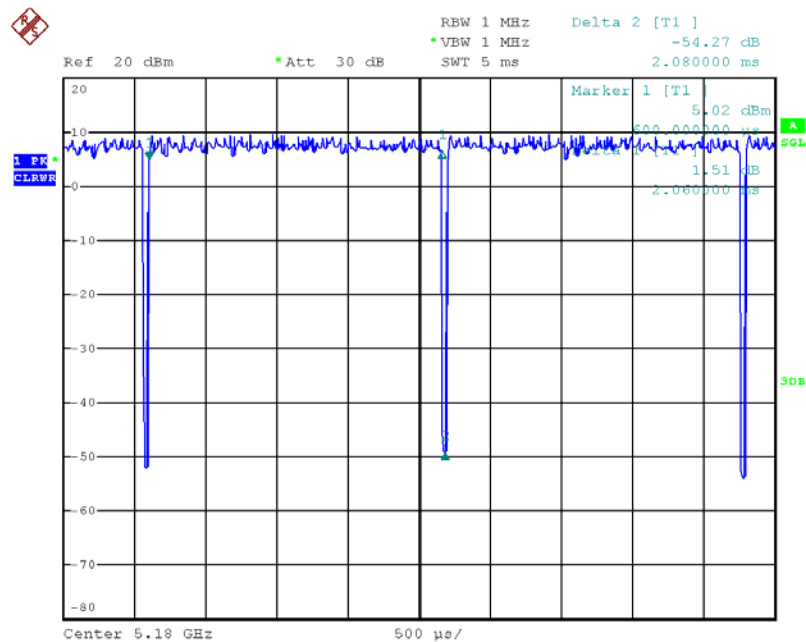


Date: 3.DEC.2012 22:57:28

3.11. Test Configurations


3.11.1. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

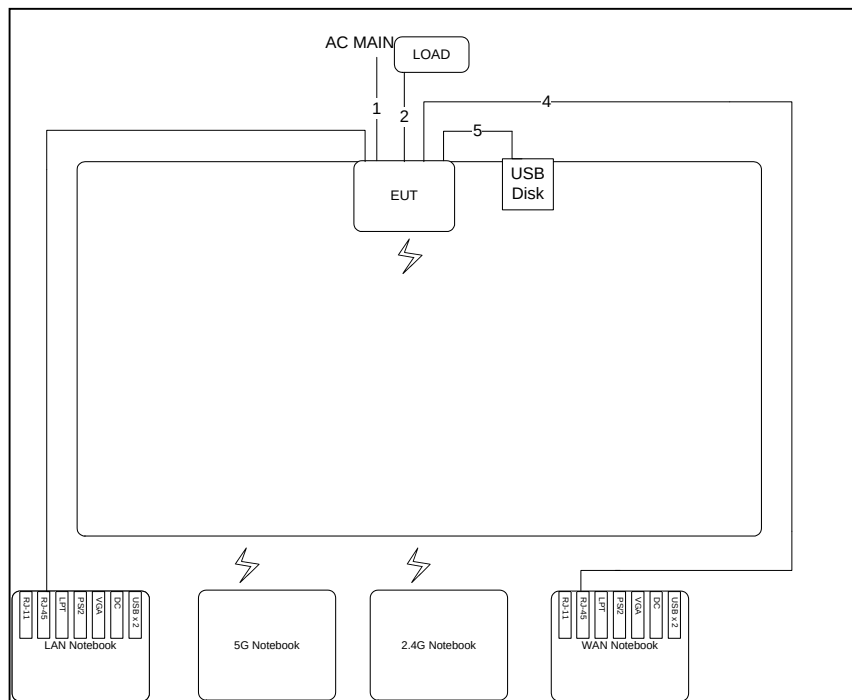


Item	Connection	Shield	Length
1	Power cable	No	1.5m
2	RJ-45 cable*3	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m
5	USB cable	No	0.4m

Test Configuration: above 1GHz

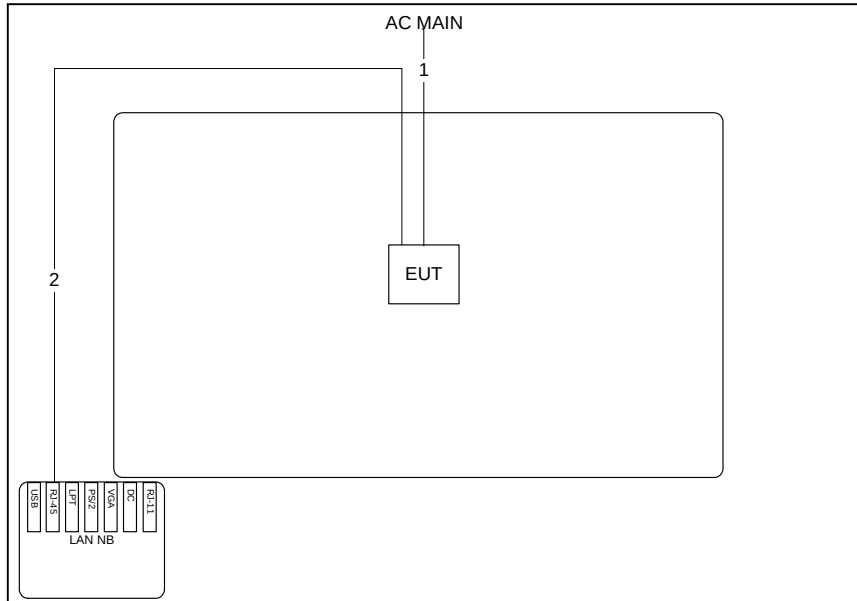

Item	Connection	Shield	Length
1	Power cable	No	1.5m
2	RJ-45 Cable	No	10m

3.11.2. AC Power Line Conduction Emissions Test Configuration

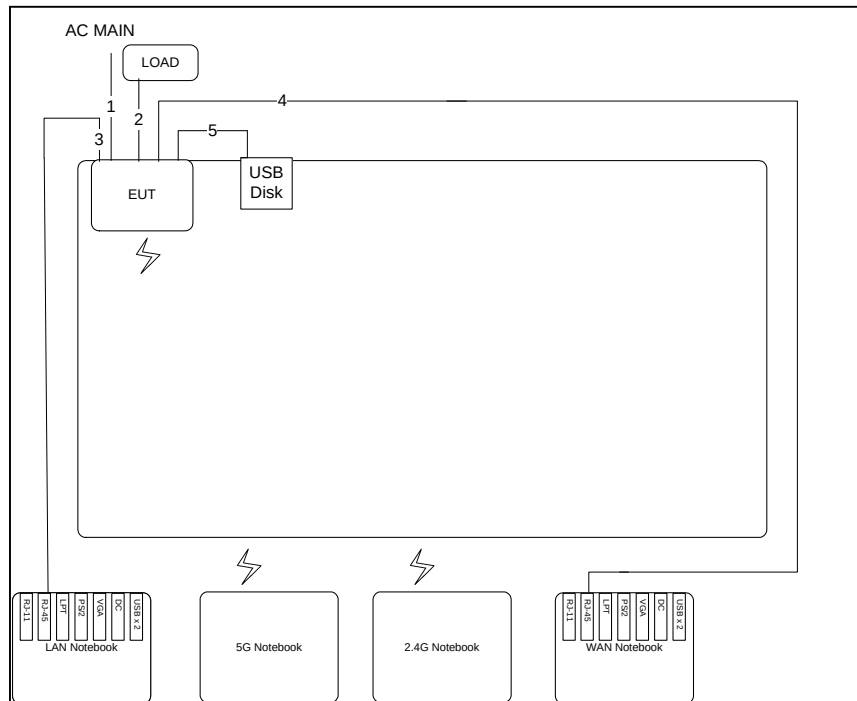

Item	Connection	Shield	Length
1	Power cable	No	1.5m
2	RJ-45 cable*3	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m
5	USB cable	No	0.4m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

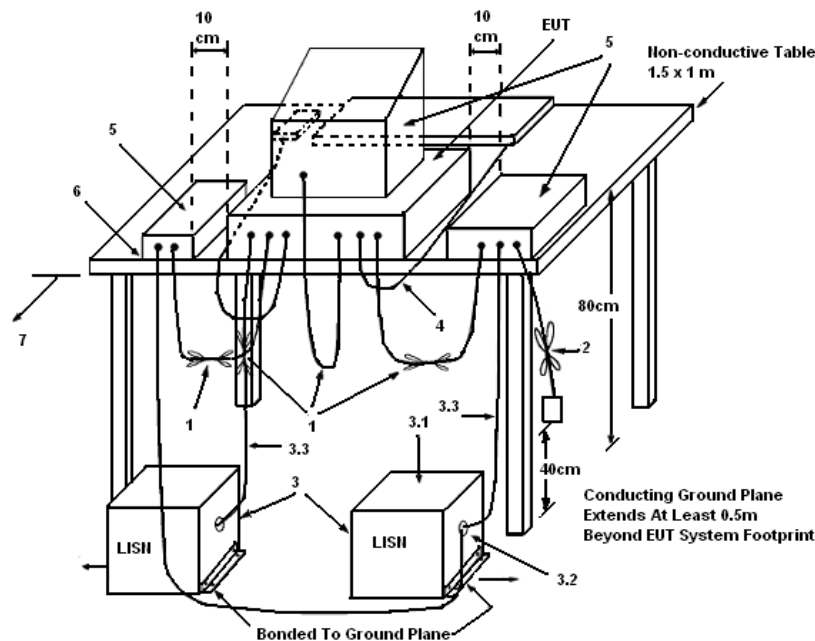

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	52.8%
Test Engineer	Sollo Luo	Phase	Line
Configuration	Normal Link / Mode 1. Adapter 1(APD WA-24E12FU)		

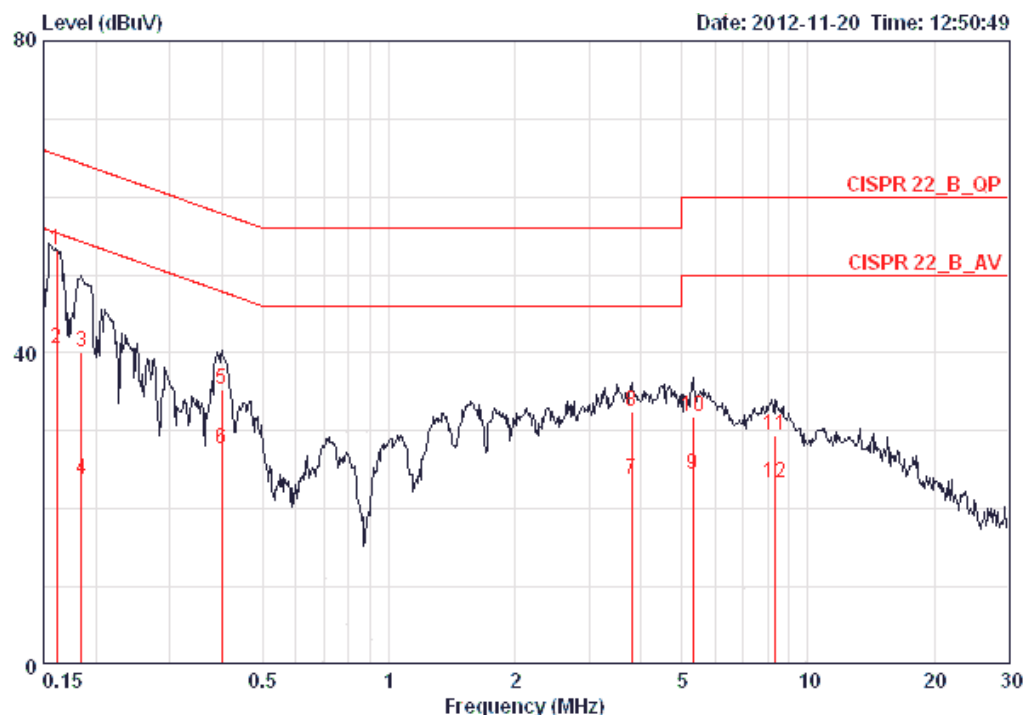


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.16155	53.17	-12.21	65.38	52.81	0.16	0.20	LINE	QP
2	0.16155	40.48	-14.90	55.38	40.12	0.16	0.20	LINE	AVERAGE
3	0.18443	40.12	-24.16	64.28	39.77	0.15	0.20	LINE	QP
4	0.18443	23.77	-30.51	54.28	23.42	0.15	0.20	LINE	AVERAGE
5	0.39974	35.39	-22.47	57.86	35.04	0.15	0.20	LINE	QP
6	0.39974	27.79	-20.07	47.86	27.44	0.15	0.20	LINE	AVERAGE
7	3.799	23.80	-22.20	46.00	23.28	0.22	0.30	LINE	AVERAGE
8	3.799	32.53	-23.47	56.00	32.01	0.22	0.30	LINE	QP
9	5.305	24.33	-25.67	50.00	23.78	0.25	0.30	LINE	AVERAGE
10	5.305	31.75	-28.25	60.00	31.20	0.25	0.30	LINE	QP
11	8.367	29.44	-30.56	60.00	28.81	0.31	0.32	LINE	QP
12	8.367	23.32	-26.68	50.00	22.69	0.31	0.32	LINE	AVERAGE

Temperature	24°C	Humidity	52.8%
Test Engineer	Sollo Luo	Phase	Neutral
Configuration	Normal Link / Mode 1. Adapter 1(APD WA-24E12FU)		

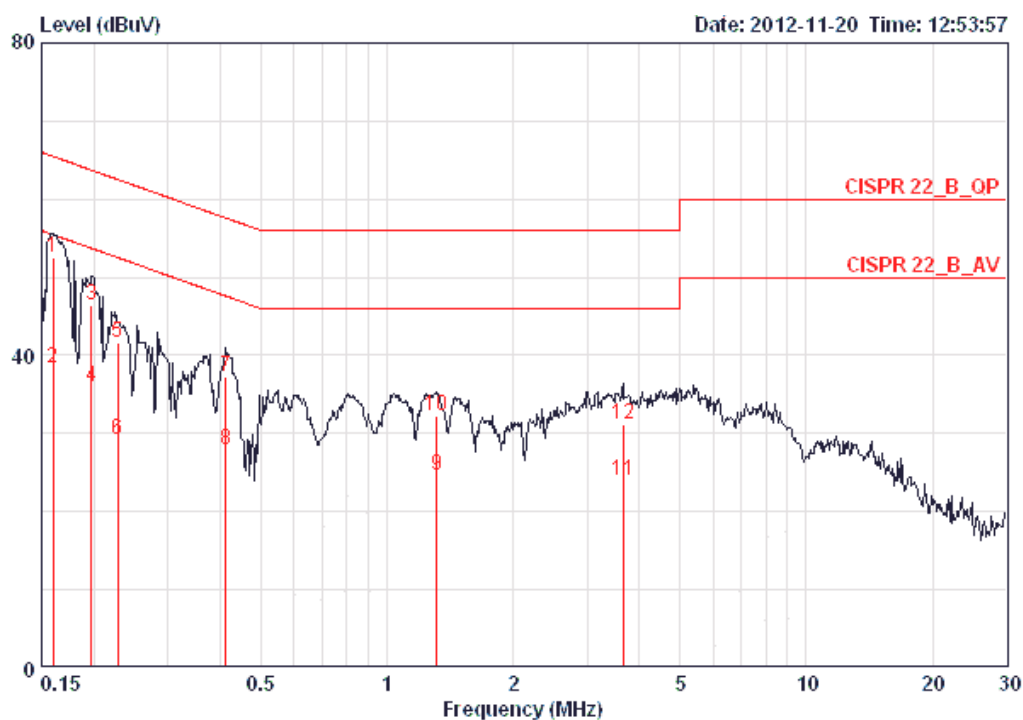


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15985	52.52	-12.95	65.47	52.24	0.08	0.20	NEUTRAL	QP
2	0.15985	38.29	-17.18	55.47	38.01	0.08	0.20	NEUTRAL	AVERAGE
3	0.19758	46.36	-17.35	63.71	46.08	0.08	0.20	NEUTRAL	QP
4	0.19758	36.04	-17.67	53.71	35.76	0.08	0.20	NEUTRAL	AVERAGE
5	0.22797	41.59	-20.93	62.52	41.31	0.08	0.20	NEUTRAL	QP
6	0.22797	29.18	-23.34	52.52	28.90	0.08	0.20	NEUTRAL	AVERAGE
7	0.41266	37.29	-20.30	57.59	37.01	0.08	0.20	NEUTRAL	QP
8	0.41266	28.01	-19.58	47.59	27.73	0.08	0.20	NEUTRAL	AVERAGE
9	1.317	24.73	-21.27	46.00	24.50	0.10	0.13	NEUTRAL	AVERAGE
10	1.317	32.22	-23.78	56.00	31.99	0.10	0.13	NEUTRAL	QP
11	3.661	23.96	-22.04	46.00	23.53	0.13	0.30	NEUTRAL	AVERAGE
12	3.661	31.08	-24.92	56.00	30.65	0.13	0.30	NEUTRAL	QP

Temperature	24°C	Humidity	52.8%
Test Engineer	Sollo Luo	Phase	Line
Configuration	Normal Link / Mode 2. Adapter 2(HON-KWANG HK-AX-120A200-US)		

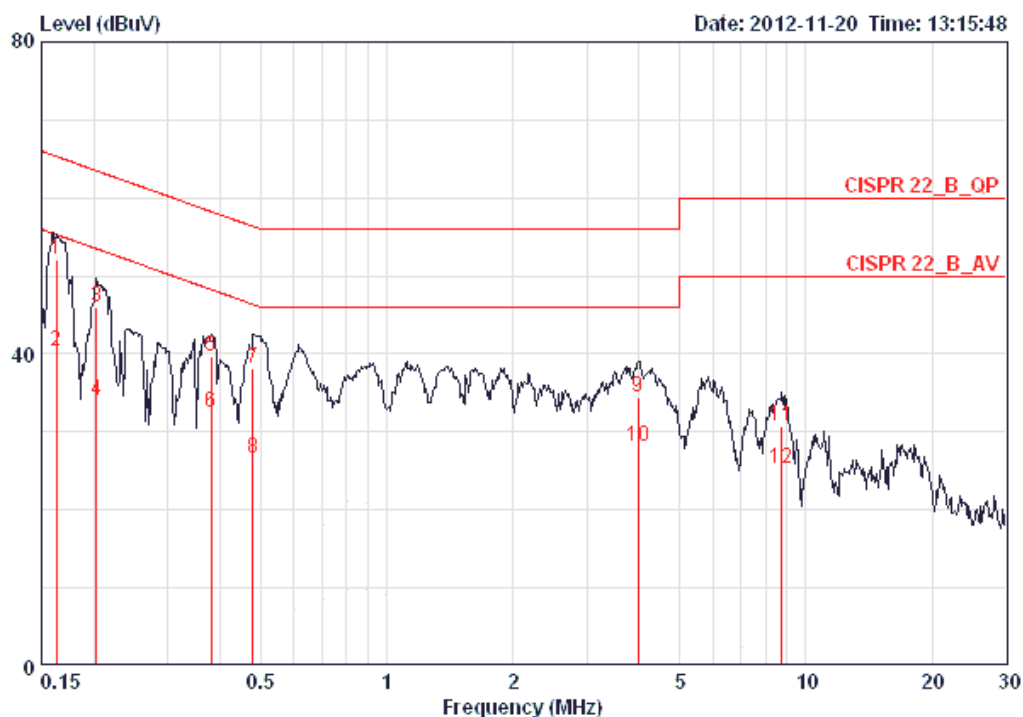

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.16241	52.06	-13.28	65.34	51.70	0.16	0.20	LINE	QP
2	0.16241	40.23	-15.11	55.34	39.87	0.16	0.20	LINE	AVERAGE
3	0.20289	45.91	-17.58	63.49	45.56	0.15	0.20	LINE	QP
4	0.20289	33.97	-19.52	53.49	33.62	0.15	0.20	LINE	AVERAGE
5	0.38113	39.73	-18.52	58.25	39.38	0.15	0.20	LINE	QP
6	0.38113	32.43	-15.82	48.25	32.08	0.15	0.20	LINE	AVERAGE
7	0.47865	38.23	-18.14	56.36	37.94	0.15	0.13	LINE	QP
8	0.47865	26.68	-19.69	46.36	26.39	0.15	0.13	LINE	AVERAGE
9	3.985	34.54	-21.46	56.00	34.02	0.22	0.30	LINE	QP
10	3.985	28.03	-17.97	46.00	27.51	0.22	0.30	LINE	AVERAGE
11	8.776	30.66	-29.34	60.00	30.04	0.32	0.30	LINE	QP
12	8.776	25.38	-24.62	50.00	24.76	0.32	0.30	LINE	AVERAGE

Temperature	24°C	Humidity	52.8%
Test Engineer	Sollo Luo	Phase	Neutral
Configuration	Normal Link / Mode 2. Adapter 2(HON-KWANG HK-AX-120A200-US)		

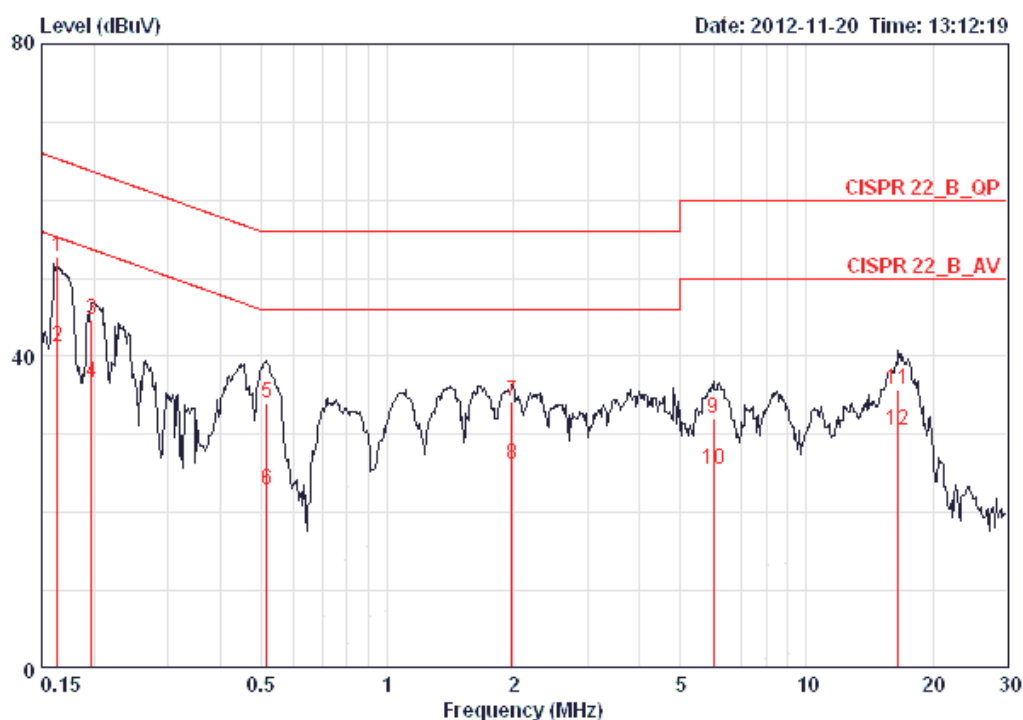


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.16327	52.69	-12.61	65.30	52.41	0.08	0.20	NEUTRAL	QP
2	0.16327	41.11	-14.19	55.30	40.83	0.08	0.20	NEUTRAL	AVERAGE
3	0.19758	44.76	-18.95	63.71	44.48	0.08	0.20	NEUTRAL	QP
4	0.19758	36.62	-17.09	53.71	36.34	0.08	0.20	NEUTRAL	AVERAGE
5	0.51550	34.09	-21.91	56.00	33.81	0.08	0.20	NEUTRAL	QP
6	0.51550	22.87	-23.13	46.00	22.59	0.08	0.20	NEUTRAL	AVERAGE
7	1.980	34.15	-21.85	56.00	33.84	0.11	0.20	NEUTRAL	QP
8	1.980	26.12	-19.88	46.00	25.81	0.11	0.20	NEUTRAL	AVERAGE
9	5.993	32.14	-27.86	60.00	31.67	0.17	0.30	NEUTRAL	QP
10	5.993	25.60	-24.40	50.00	25.13	0.17	0.30	NEUTRAL	AVERAGE
11	16.573	35.67	-24.33	60.00	34.90	0.34	0.43	NEUTRAL	QP
12	16.573	30.46	-19.54	50.00	29.69	0.34	0.43	NEUTRAL	AVERAGE

Note:


Level = Read Level + LISN Factor + Cable Loss

Temperature	24°C	Humidity	52.8%
Test Engineer	Sollo Luo	Phase	Line
Configuration	Normal Link / Mode 3. Adapter 3(HON-KWANG HK-AX-120A200-CP)		

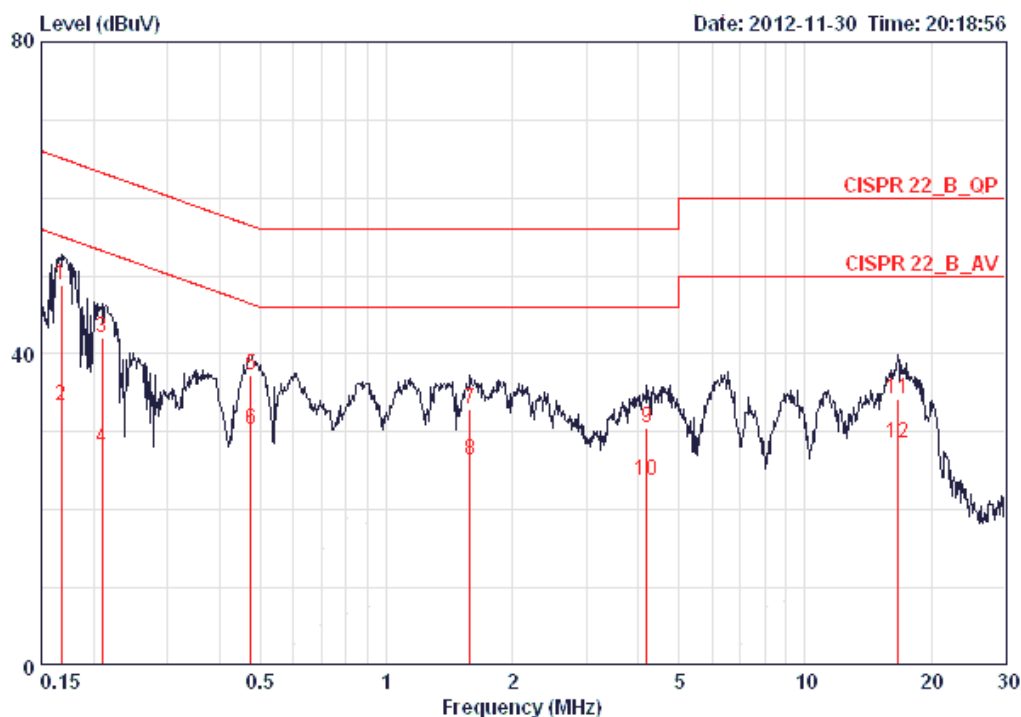

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.16765	48.91	-16.17	65.08	48.55	0.16	0.20	LINE	QP
2	0.16765	33.45	-21.63	55.08	33.09	0.16	0.20	LINE	AVERAGE
3	0.20944	41.99	-21.24	63.23	41.64	0.15	0.20	LINE	QP
4	0.20944	27.98	-25.25	53.23	27.63	0.15	0.20	LINE	AVERAGE
5	0.47360	37.20	-19.25	56.45	36.88	0.15	0.17	LINE	QP
6	0.47360	30.22	-16.23	46.45	29.90	0.15	0.17	LINE	AVERAGE
7	1.585	32.93	-23.07	56.00	32.63	0.18	0.12	LINE	QP
8	1.585	26.28	-19.72	46.00	25.98	0.18	0.12	LINE	AVERAGE
9	4.180	30.57	-25.43	56.00	30.05	0.22	0.30	LINE	QP
10	4.180	23.82	-22.18	46.00	23.30	0.22	0.30	LINE	AVERAGE
11	16.661	34.25	-25.75	60.00	33.38	0.43	0.43	LINE	QP
12	16.661	28.53	-21.47	50.00	27.66	0.43	0.43	LINE	AVERAGE

Temperature	24°C	Humidity	52.8%
Test Engineer	Sollo Luo	Phase	Neutral
Configuration	Normal Link / Mode 3. Adapter 3(HON-KWANG HK-AX-120A200-CP)		

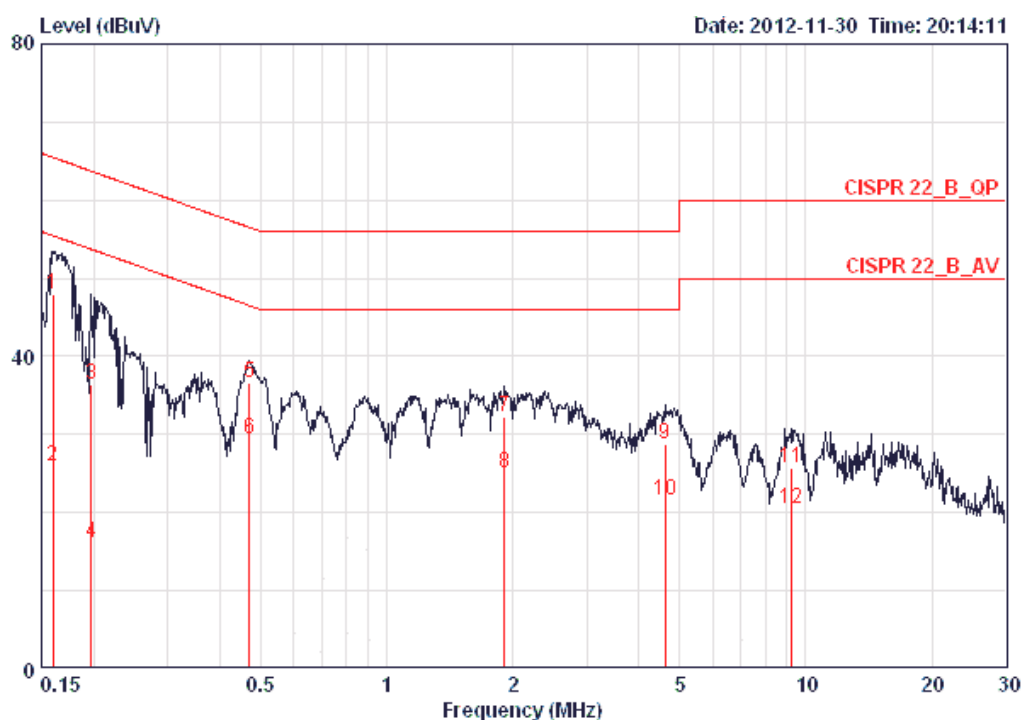


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15985	47.88	-17.59	65.47	47.60	0.08	0.20	NEUTRAL	QP
2	0.15985	25.98	-29.49	55.47	25.70	0.08	0.20	NEUTRAL	AVERAGE
3	0.19758	36.31	-27.40	63.71	36.03	0.08	0.20	NEUTRAL	QP
4	0.19758	16.16	-37.55	53.71	15.88	0.08	0.20	NEUTRAL	AVERAGE
5	0.47110	36.60	-19.89	56.49	36.32	0.08	0.20	NEUTRAL	QP
6	0.47110	29.34	-17.15	46.49	29.06	0.08	0.20	NEUTRAL	AVERAGE
7	1.908	32.16	-23.84	56.00	31.87	0.11	0.18	NEUTRAL	QP
8	1.908	25.03	-20.97	46.00	24.74	0.11	0.18	NEUTRAL	AVERAGE
9	4.622	28.74	-27.26	56.00	28.30	0.14	0.30	NEUTRAL	QP
10	4.622	21.49	-24.51	46.00	21.05	0.14	0.30	NEUTRAL	AVERAGE
11	9.253	25.83	-34.17	60.00	25.30	0.23	0.30	NEUTRAL	QP
12	9.253	20.56	-29.44	50.00	20.03	0.23	0.30	NEUTRAL	AVERAGE

Note:


Level = Read Level + LISN Factor + Cable Loss

Temperature	24°C	Humidity	52.8%
Test Engineer	Sollo Luo	Phase	Line
Configuration	Normal Link / Mode 4. Adapter 4(SOLYTECH CAD2412)		

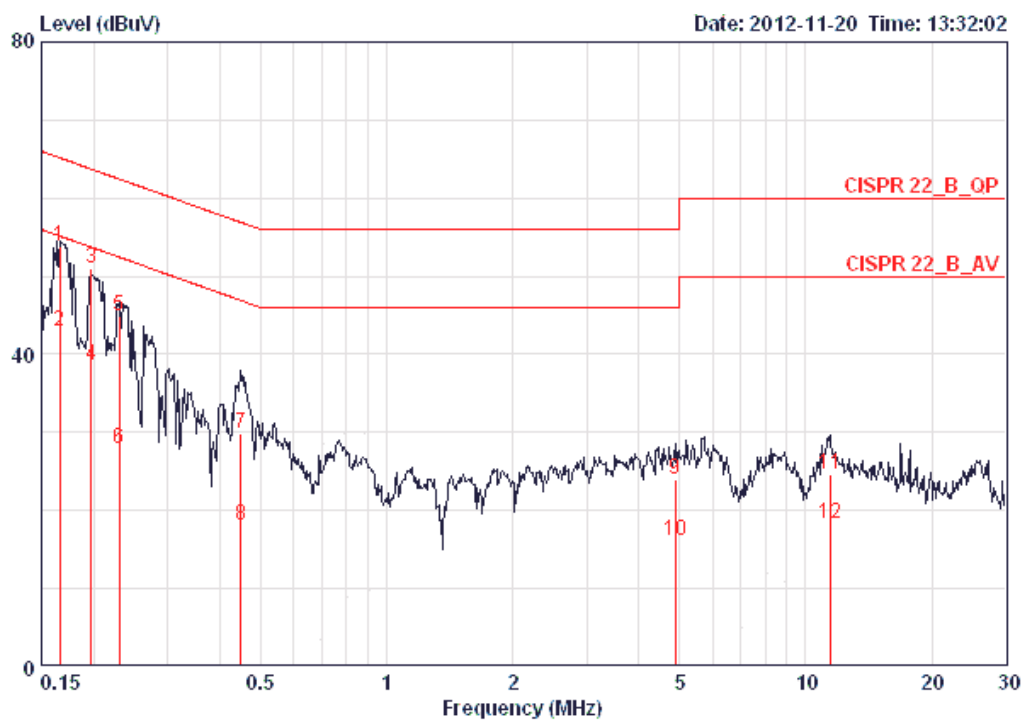

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.16589	53.84	-11.32	65.16	53.48	0.16	0.20	LINE	QP
2	0.16589	43.04	-12.12	55.16	42.68	0.16	0.20	LINE	AVERAGE
3	0.19758	50.98	-12.73	63.71	50.63	0.15	0.20	LINE	QP
4	0.19758	38.58	-15.13	53.71	38.23	0.15	0.20	LINE	AVERAGE
5	0.23040	45.01	-17.43	62.44	44.66	0.15	0.20	LINE	QP
6	0.23040	27.92	-24.52	52.44	27.57	0.15	0.20	LINE	AVERAGE
7	0.44916	29.79	-27.10	56.89	29.44	0.15	0.20	LINE	QP
8	0.44916	18.09	-28.80	46.89	17.74	0.15	0.20	LINE	AVERAGE
9	4.874	24.07	-31.93	56.00	23.53	0.24	0.30	LINE	QP
10	4.874	16.14	-29.86	46.00	15.60	0.24	0.30	LINE	AVERAGE
11	11.438	24.68	-35.32	60.00	23.92	0.36	0.40	LINE	QP
12	11.438	18.40	-31.60	50.00	17.64	0.36	0.40	LINE	AVERAGE

Temperature	24°C	Humidity	52.8%
Test Engineer	Sollo Luo	Phase	Neutral
Configuration	Normal Link / Mode 4. Adapter 4(SOLYTECH CAD2412)		

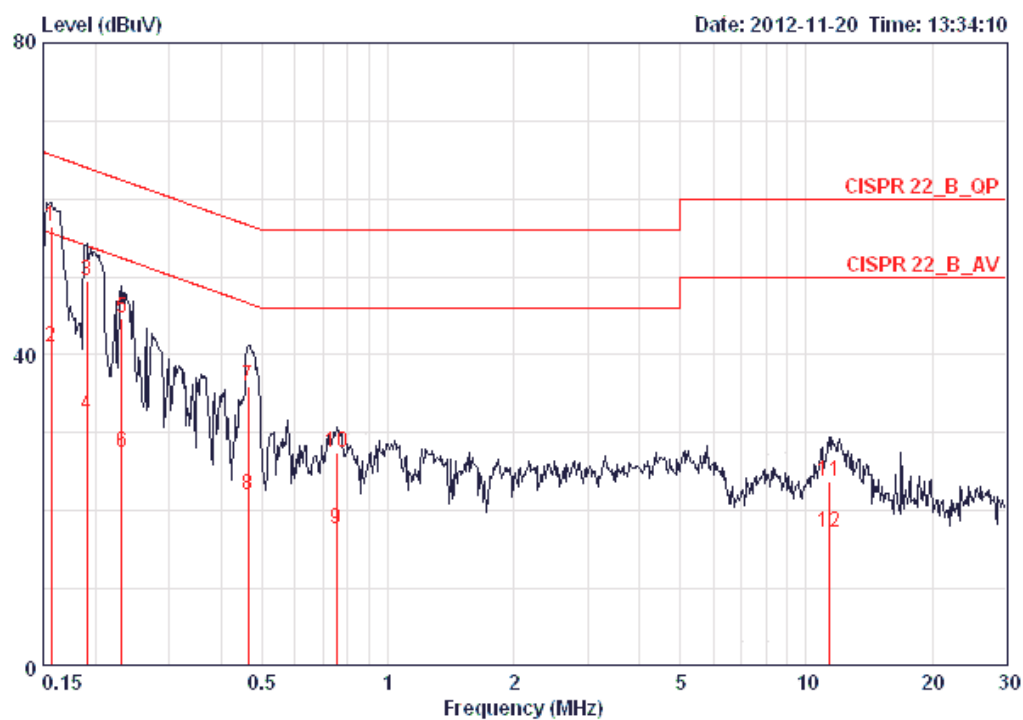


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.15650	56.54	-9.11	65.65	56.26	0.08	0.20	NEUTRAL	QP
2	0.15650	40.88	-14.77	55.65	40.60	0.08	0.20	NEUTRAL	AVERAGE
3	0.19039	49.50	-14.52	64.02	49.22	0.08	0.20	NEUTRAL	QP
4	0.19039	32.18	-21.84	54.02	31.90	0.08	0.20	NEUTRAL	AVERAGE
5	0.23162	44.60	-17.79	62.39	44.32	0.08	0.20	NEUTRAL	QP
6	0.23162	27.49	-24.90	52.39	27.21	0.08	0.20	NEUTRAL	AVERAGE
7	0.46367	36.01	-20.62	56.63	35.73	0.08	0.20	NEUTRAL	QP
8	0.46367	21.95	-24.68	46.63	21.67	0.08	0.20	NEUTRAL	AVERAGE
9	0.75493	17.70	-28.30	46.00	17.41	0.09	0.20	NEUTRAL	AVERAGE
10	0.75493	27.45	-28.55	56.00	27.16	0.09	0.20	NEUTRAL	QP
11	11.317	23.86	-36.14	60.00	23.20	0.26	0.40	NEUTRAL	QP
12	11.317	17.13	-32.87	50.00	16.47	0.26	0.40	NEUTRAL	AVERAGE

Note:


Level = Read Level + LISN Factor + Cable Loss

Temperature	24°C	Humidity	52.8%
Test Engineer	Sollo Luo	Phase	Line
Configuration	Normal Link / Mode 5. Adapter 5(LEI MU24-S120200-A1)		

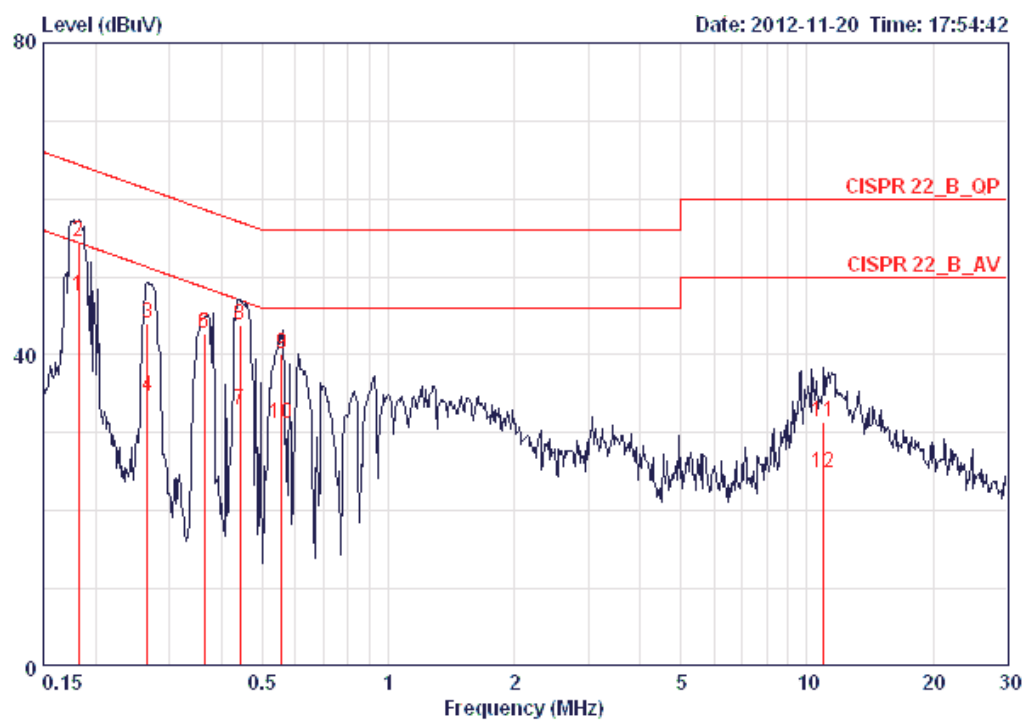

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.18249	47.52	-6.85	54.37	47.17	0.15	0.20	LINE	AVERAGE
2	0.18249	54.58	-9.79	64.37	54.23	0.15	0.20	LINE	QP
3	0.26583	44.11	-17.14	61.25	43.76	0.15	0.20	LINE	QP
4	0.26583	34.74	-16.51	51.25	34.39	0.15	0.20	LINE	AVERAGE
5	0.36438	42.65	-15.98	58.63	42.30	0.15	0.20	LINE	QP
6	0.36438	42.71	-15.92	58.63	42.36	0.15	0.20	LINE	QP
7	0.44208	32.99	-14.03	47.02	32.64	0.15	0.20	LINE	AVERAGE
8	0.44208	43.73	-13.29	57.02	43.38	0.15	0.20	LINE	QP
9	0.55540	40.05	-15.96	56.00	39.69	0.16	0.20	LINE	QP
10	0.55540	31.22	-14.79	46.00	30.86	0.16	0.20	LINE	AVERAGE
11	10.963	31.34	-28.66	60.00	30.59	0.35	0.40	LINE	QP
12	10.963	24.93	-25.07	50.00	24.18	0.35	0.40	LINE	AVERAGE

Temperature	24°C	Humidity	52.8%
Test Engineer	Sollo Luo	Phase	Neutral
Configuration	Normal Link / Mode 5. Adapter 5(LEI MU24-S120200-A1)		

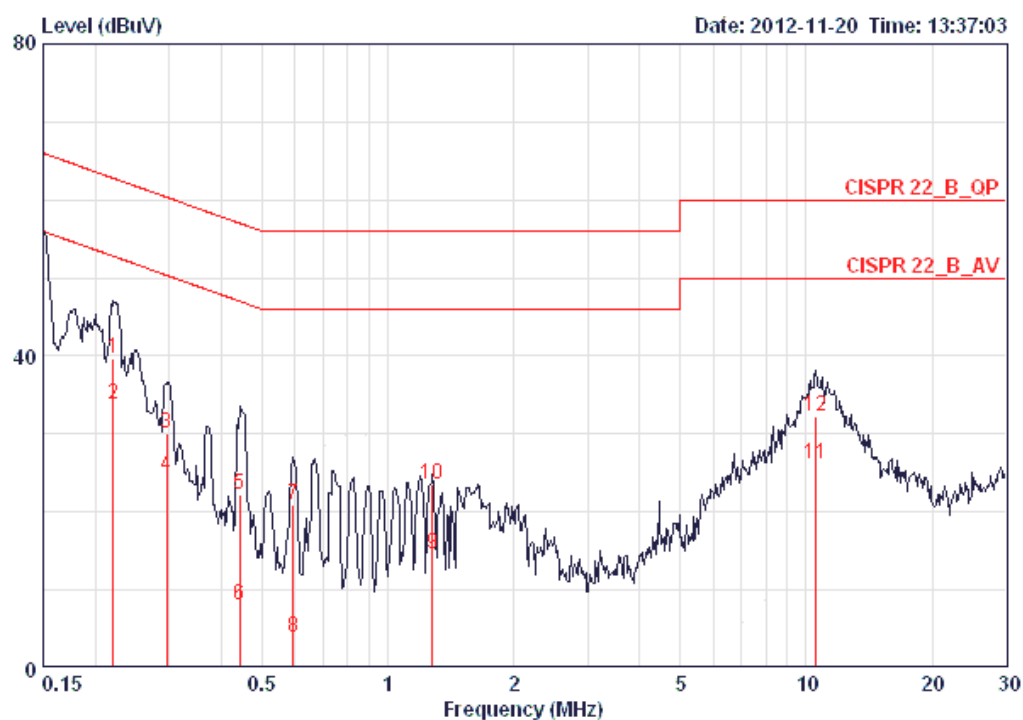

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.22083	39.75	-23.04	62.79	39.47	0.08	0.20	NEUTRAL	QP
2	0.22083	33.79	-19.00	52.79	33.51	0.08	0.20	NEUTRAL	AVERAGE
3	0.29555	30.06	-30.31	60.37	29.78	0.08	0.20	NEUTRAL	QP
4	0.29555	24.55	-25.82	50.37	24.27	0.08	0.20	NEUTRAL	AVERAGE
5	0.44208	22.20	-34.82	57.02	21.92	0.08	0.20	NEUTRAL	QP
6	0.44208	8.04	-38.98	47.02	7.76	0.08	0.20	NEUTRAL	AVERAGE
7	0.59478	20.94	-35.06	56.00	20.66	0.08	0.20	NEUTRAL	QP
8	0.59478	3.92	-42.08	46.00	3.64	0.08	0.20	NEUTRAL	AVERAGE
9	1.276	14.51	-31.49	46.00	14.27	0.10	0.14	NEUTRAL	AVERAGE
10	1.276	23.58	-32.42	56.00	23.34	0.10	0.14	NEUTRAL	QP
11	10.564	26.15	-23.85	50.00	25.51	0.25	0.39	NEUTRAL	AVERAGE
12	10.564	32.19	-27.81	60.00	31.55	0.25	0.39	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. 26dB Bandwidth & 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	Approximately 1% of the emission bandwidth
VB	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RB	1 % to 5 % of the OBW
VB	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

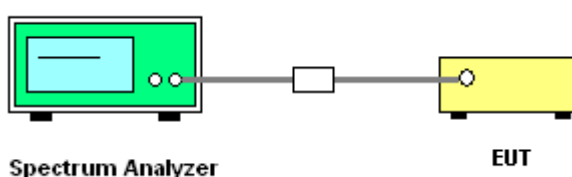

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth & 99% Occupied Bandwidth

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n / ac

Configuration IEEE 802.11n MCS0 HT 20MHz / Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.16	17.44
40	5200 MHz	20.32	17.76
48	5240 MHz	20.32	17.60

Configuration IEEE 802.11n MCS0 HT 40MHz / Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	39.04	36.48
46	5230 MHz	39.04	36.48

Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.16	17.44
40	5200 MHz	20.48	17.60
48	5240 MHz	20.48	17.44

Configuration IEEE 802.11ac MCS0 VHT 40MHz / Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	39.36	36.48
46	5230 MHz	39.04	36.48

Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 2 + Ant. 3


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	80.00	76.16

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 2 + Ant. 3


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	19.84	16.32
40	5200 MHz	19.84	16.48
48	5240 MHz	19.84	16.32

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20MHz / Ant. 2 + Ant. 3 / 5180 MHz

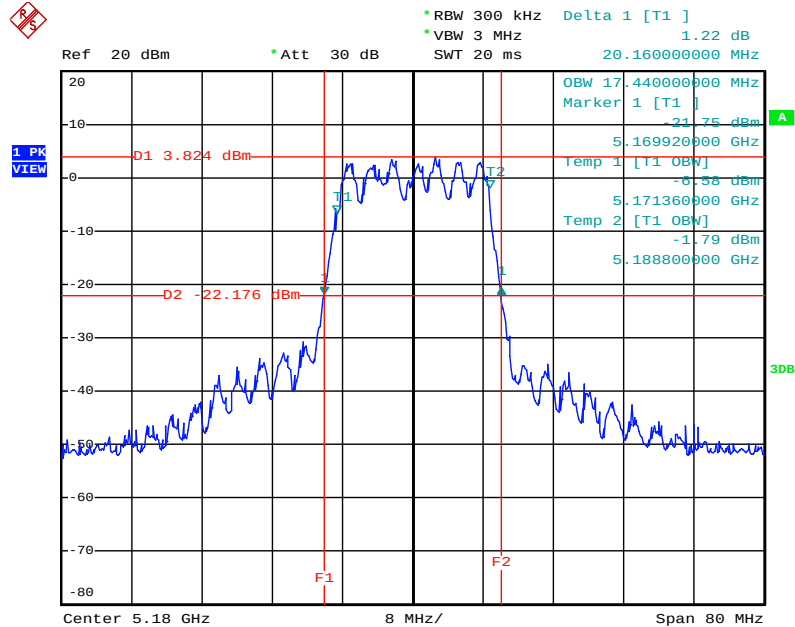


Date: 4.DEC.2012 00:30:48

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20MHz / Ant. 2 + Ant. 3 / 5200 MHz

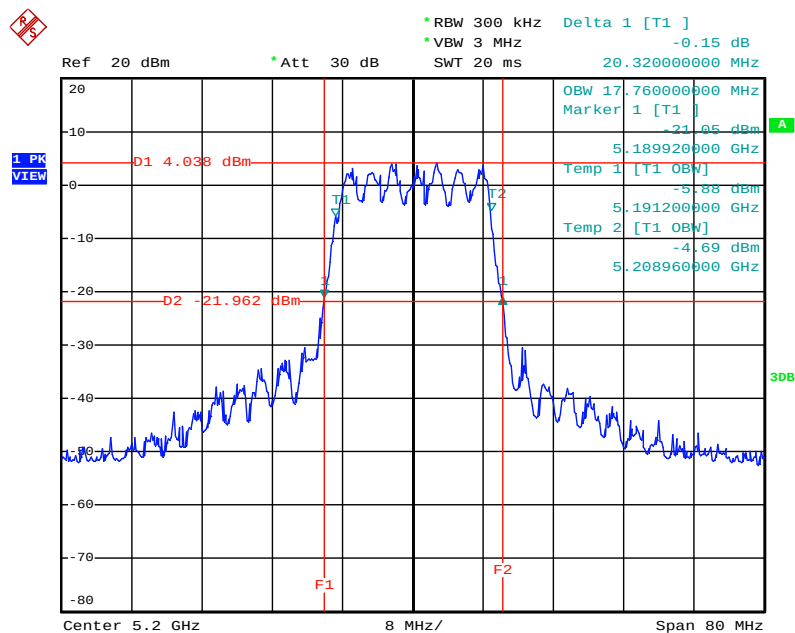


Date: 4.DEC.2012 00:30:27

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20MHz / Ant. 2 + Ant. 3 / 5240 MHz

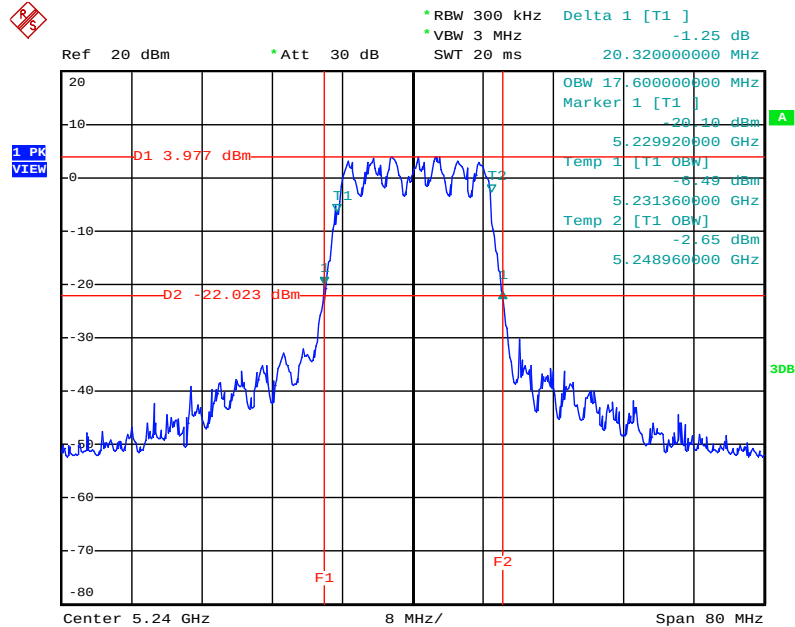


Date: 4.DEC.2012 00:30:07

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40MHz / Ant. 2 + Ant. 3 / 5190 MHz

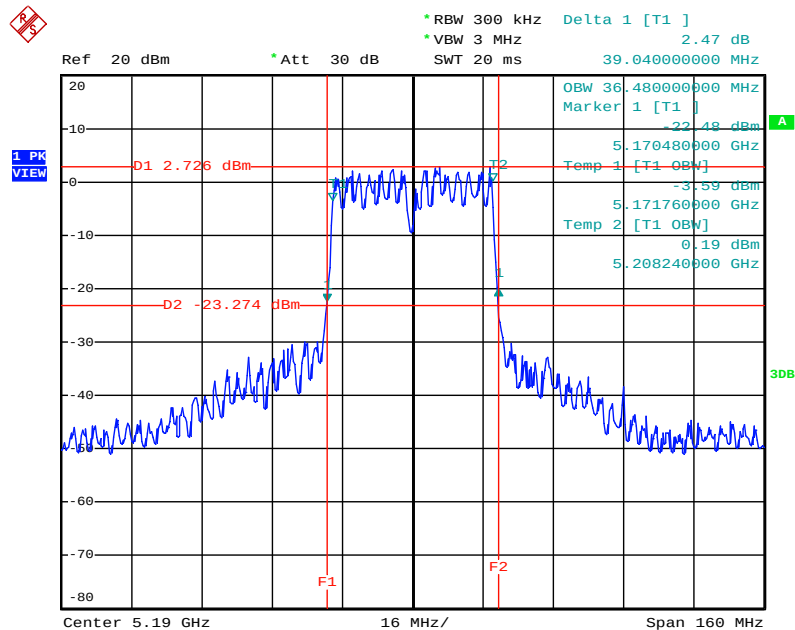


Date: 4.DEC.2012 00:31:23

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40MHz / Ant. 2 + Ant. 3 / 5230 MHz

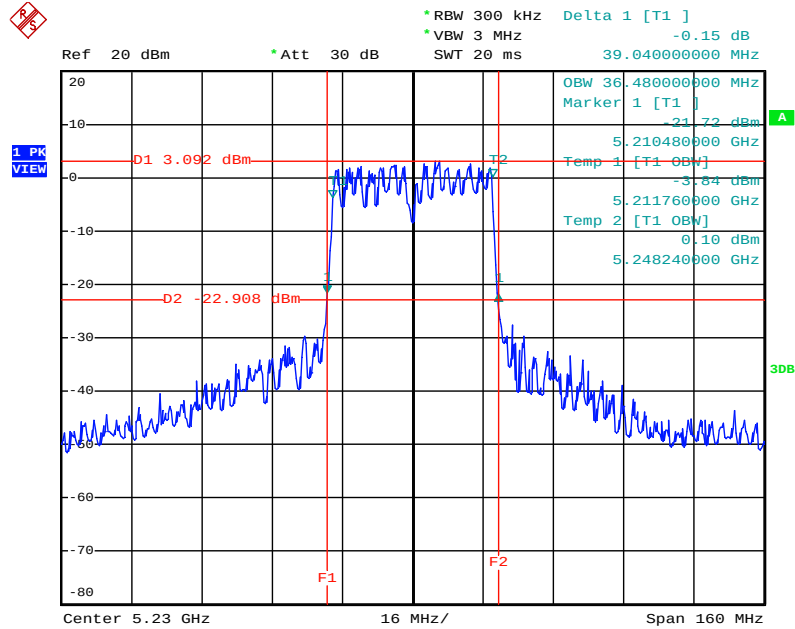


Date: 4.DEC.2012 00:32:00

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 2 + Ant. 3 / 5180 MHz

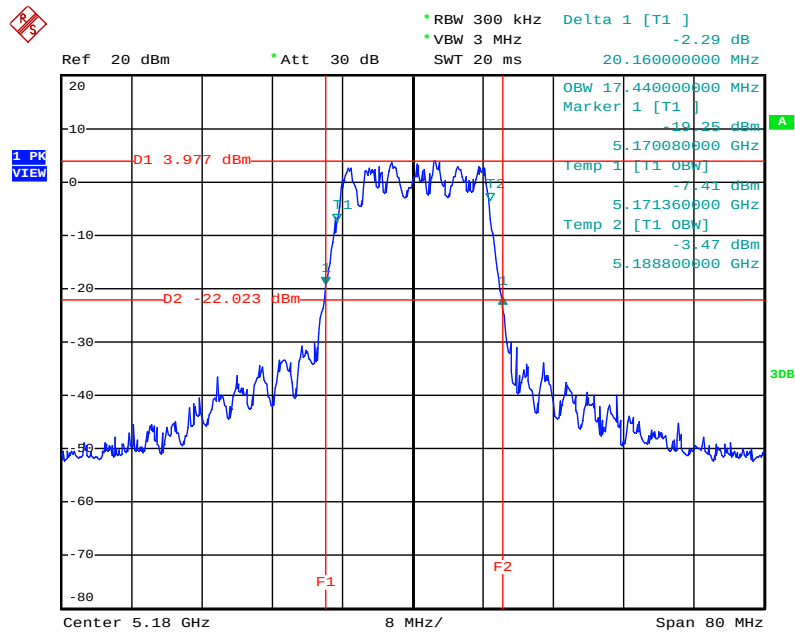


Date: 4.DEC.2012 00:33:22

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 2 + Ant. 3 / 5200 MHz

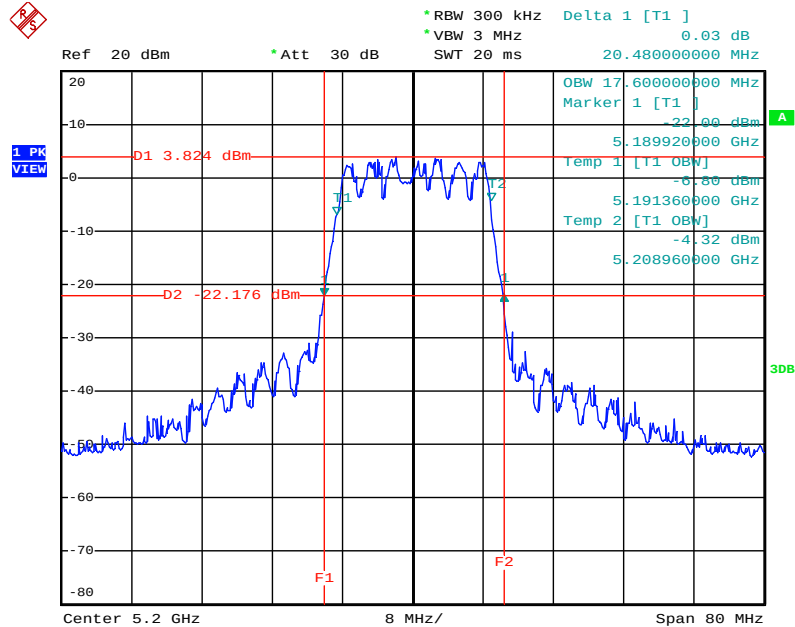


Date: 4.DEC.2012 00:33:40

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 2 + Ant. 3 / 5240 MHz

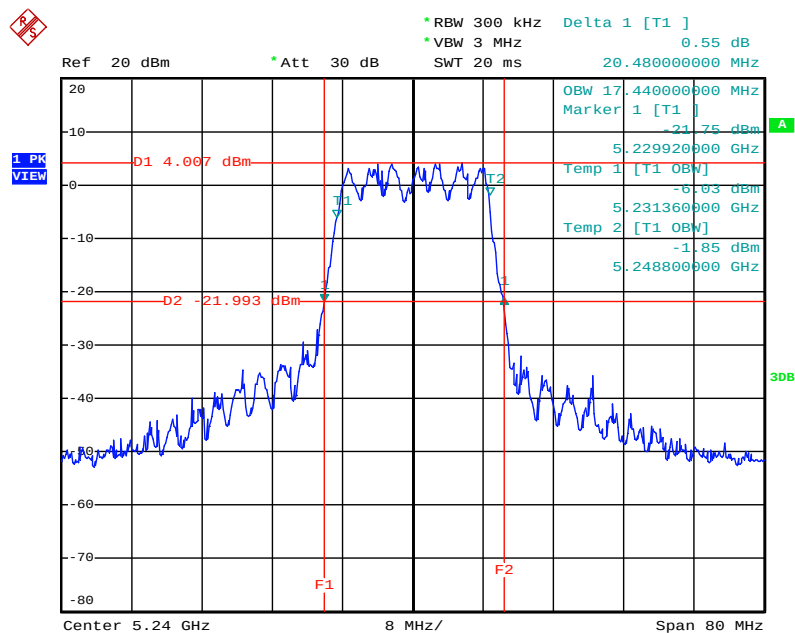


Date: 4.DEC.2012 00:34:00

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0 VHT 40MHz / Ant. 2 + Ant. 3 / 5190 MHz

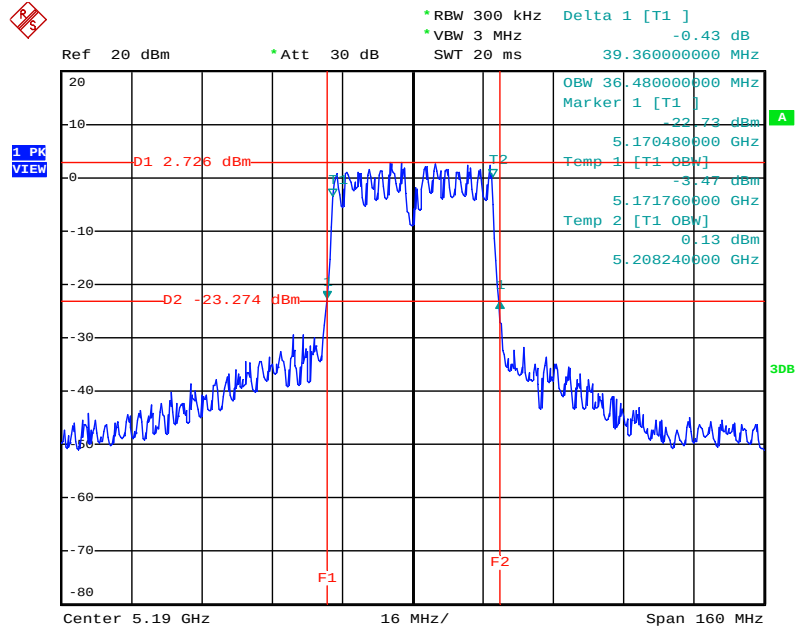


Date: 4.DEC.2012 00:32:51

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0 VHT 40MHz / Ant. 2 + Ant. 3 / 5230 MHz

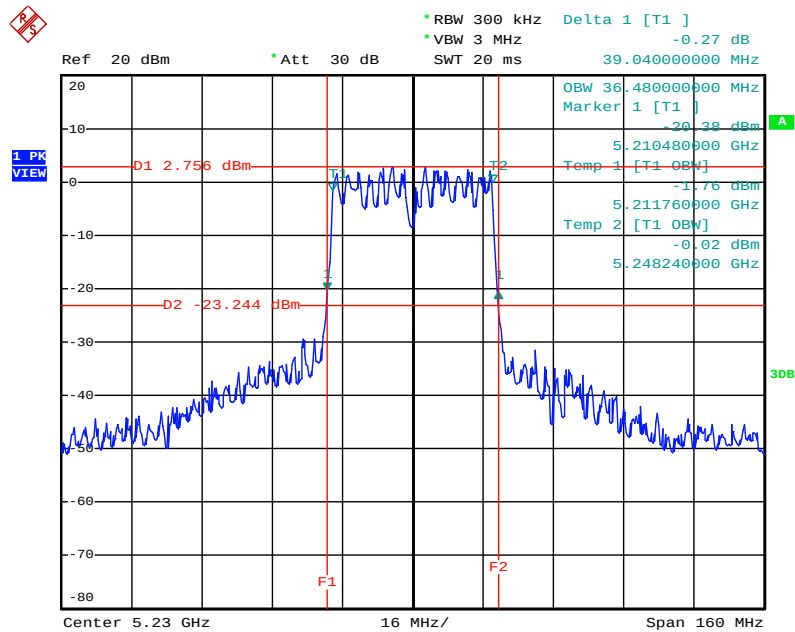


Date: 4.DEC.2012 00:32:32

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 2 + Ant. 3 / 5210 MHz

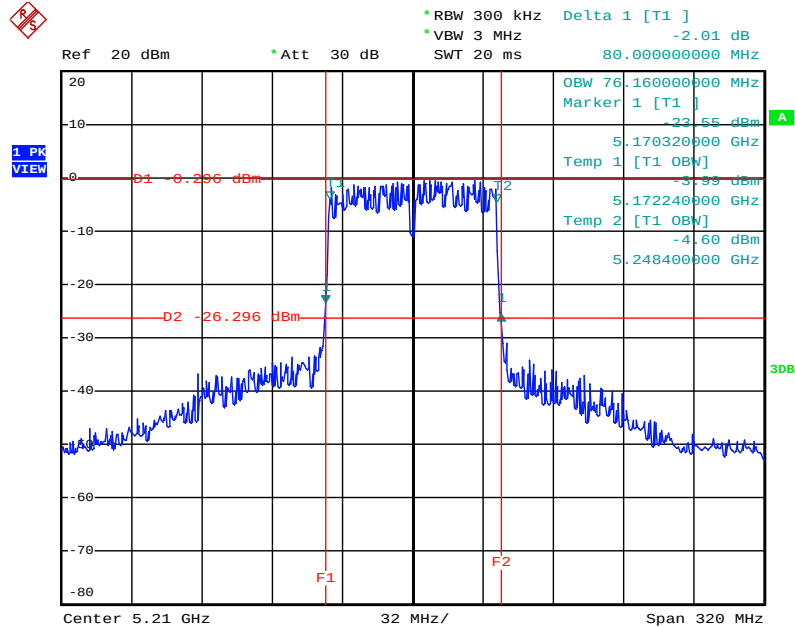


Date: 4.DEC.2012 00:34:37

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 / 5180 MHz

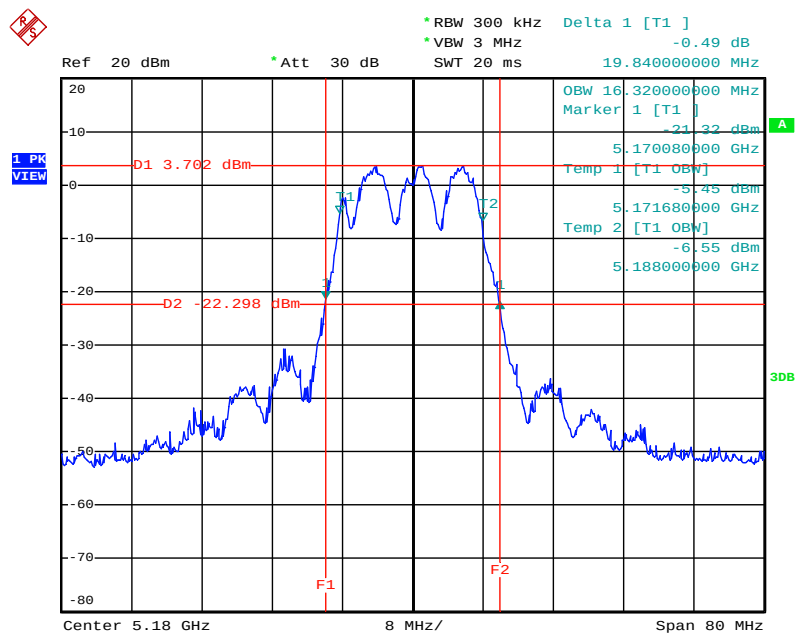


Date: 4.DEC.2012 00:28:36

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 / 5200 MHz

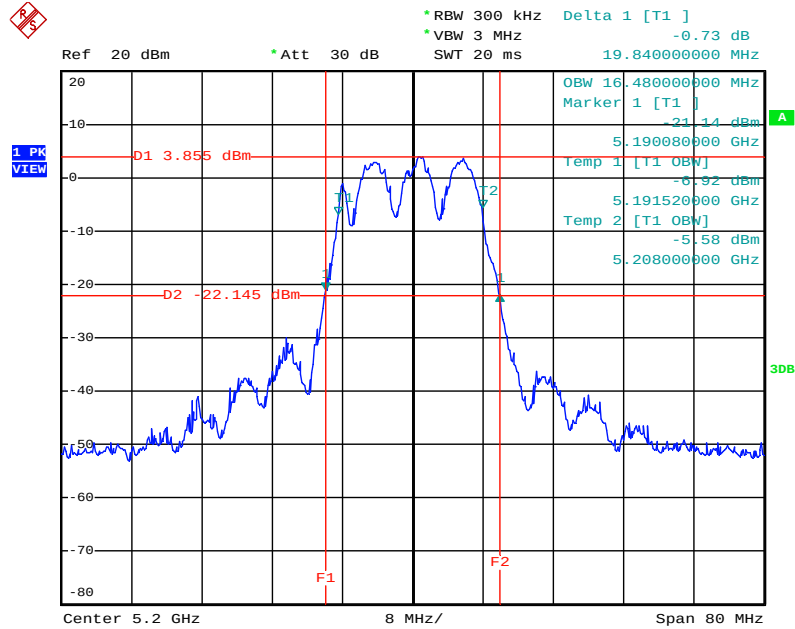

Date: 4.DEC.2012 00:29:03

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 / 5240 MHz

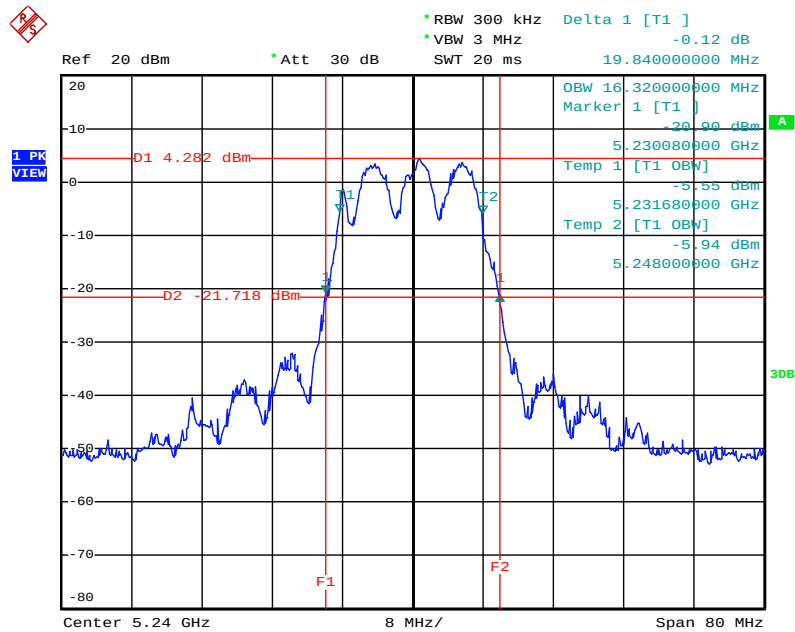

Date: 4.DEC.2012 00:29:29

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or $4 \text{ dBm} + 10\log B$, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (E) Maximum conducted output power =>(3) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v01r02 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout

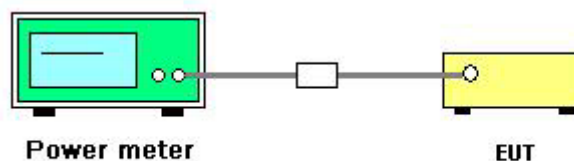

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n / ac
Test Date	Dec. 20, 2012		

Configuration IEEE 802.11n MCS0 HT20MHz / Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)		Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant. 2	Ant. 3			
36	5180 MHz	11.77	11.66	14.73	17.00	Complies
40	5200 MHz	12.26	12.16	15.22	17.00	Complies
48	5240 MHz	11.82	11.61	14.73	17.00	Complies

Configuration IEEE 802.11n MCS0 HT40MHz / Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)		Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant. 2	Ant. 3			
38	5190 MHz	13.99	13.88	16.95	17.00	Complies
46	5230 MHz	13.86	13.81	16.85	17.00	Complies

Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)		Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant. 2	Ant. 3			
36	5180 MHz	12.28	12.18	15.24	17.00	Complies
40	5200 MHz	11.21	11.67	14.46	17.00	Complies
48	5240 MHz	11.70	11.63	14.68	17.00	Complies

Configuration IEEE 802.11ac MCS0 VHT 40MHz / Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)		Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant. 2	Ant. 3			
38	5190 MHz	13.93	13.85	16.90	17.00	Complies
46	5230 MHz	13.92	13.89	16.92	17.00	Complies

Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)		Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant. 2	Ant. 3			
42	5210 MHz	14.01	13.89	16.96	17.00	Complies

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a
Test Date	Dec. 20, 2012		

Configuration IEEE 802.11a / Ant. 2 + Ant. 3

Channel	Frequency	Conducted Power (dBm)		Total Conducted Output Power (dBm)	Max. Limit (dBm)	Result
		Ant. 2	Ant. 3			
36	5180 MHz	11.50	11.39	14.46	16.98	Complies
40	5200 MHz	11.64	11.38	14.52	16.98	Complies
48	5240 MHz	11.70	11.44	14.58	16.98	Complies

Note: Power Limit=4+10*log(B) or 17dBm;4+10*log(19.84)=16.98dBm<17dBm, so power limit=16.98dBm

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v01r02 in-Band Power Spectral Density (PSD) Measurements (1) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

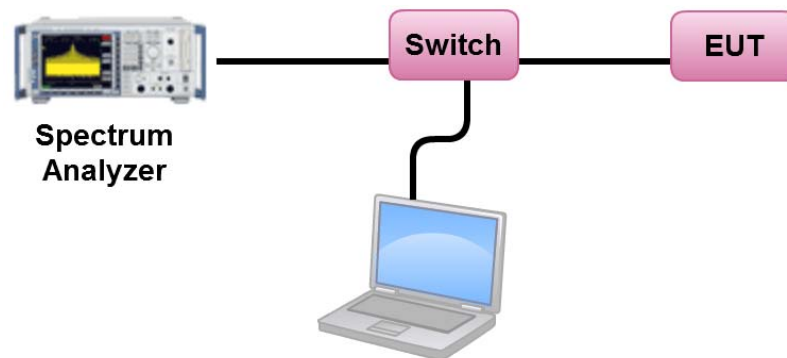

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11n / ac
Test Date	Dec. 20, 2012		

Configuration IEEE 802.11n MCS0 HT20MHz / Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	1.70	1.82	Complies
40	5200 MHz	1.71	1.82	Complies
48	5240 MHz	1.76	1.82	Complies

Note: Directional gain=GANT+10log(NANT/Nss)=8.18dBi >6dBi, so limit =4-(8.18-6)=1.82dBm/MHz

Configuration IEEE 802.11n MCS0 HT40MHz / Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	0.47	1.82	Complies
46	5230 MHz	0.61	1.82	Complies

Note: Directional gain=GANT+10log(NANT/Nss)=8.18dBi >6dBi, so limit =4-(8.18-6)=1.82dBm/MHz

Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	1.73	1.82	Complies
40	5200 MHz	1.77	1.82	Complies
48	5240 MHz	1.70	1.82	Complies

Note: Directional gain=GANT+10log(NANT/Nss)=8.18dBi >6dBi, so limit =4-(8.18-6)=1.82dBm/MHz

Configuration IEEE 802.11ac MCS0 VHT 40MHz / Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	0.40	1.82	Complies
46	5230 MHz	0.54	1.82	Complies

Note: Directional gain=GANT+10log(NANT/Nss)=8.18dBi >6dBi, so limit =4-(8.18-6)=1.82dBm/MHz

Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-2.43	1.82	Complies

Note: Directional gain=GANT+10log(NANT/Nss)=8.18dBi >6dBi, so limit =4-(8.18-6)=1.82dBm/MHz

Temperature	25°C	Humidity	56%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a
Test Date	Dec. 20, 2012		

Configuration IEEE 802.11a / Ant. 2 + Ant. 3


Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	1.64	1.82	Complies
40	5200 MHz	1.66	1.82	Complies
48	5240 MHz	1.74	1.82	Complies

Note: Directional gain= $G_{ANT}+10\log(N_{ANT}/N_{ss})=8.18\text{dBi} > 6\text{dBi}$, so limit $=4-(8.18-6)=1.82\text{dBm/MHz}$


All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


Power Density Plot on Configuration IEEE 802.11n MCS0 HT20MHz / Ant. 2 + Ant. 3 / 5240 MHz

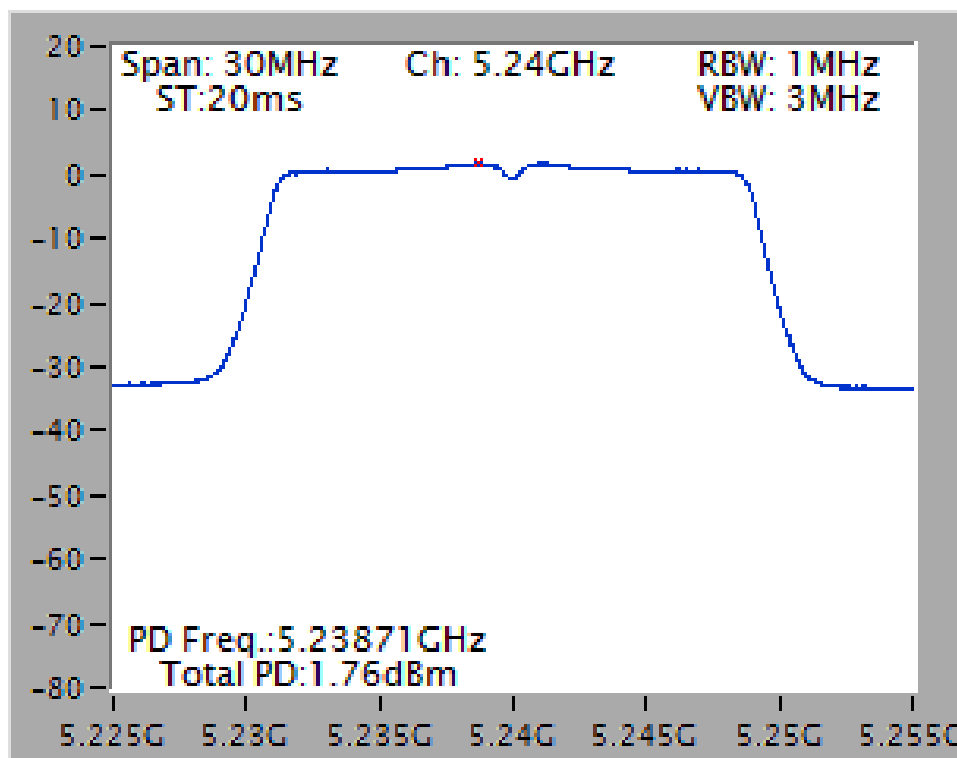


Power Density Plot on Configuration IEEE 802.11n MCS0 HT40MHz / Ant. 2 + Ant. 3 / 5230 MHz

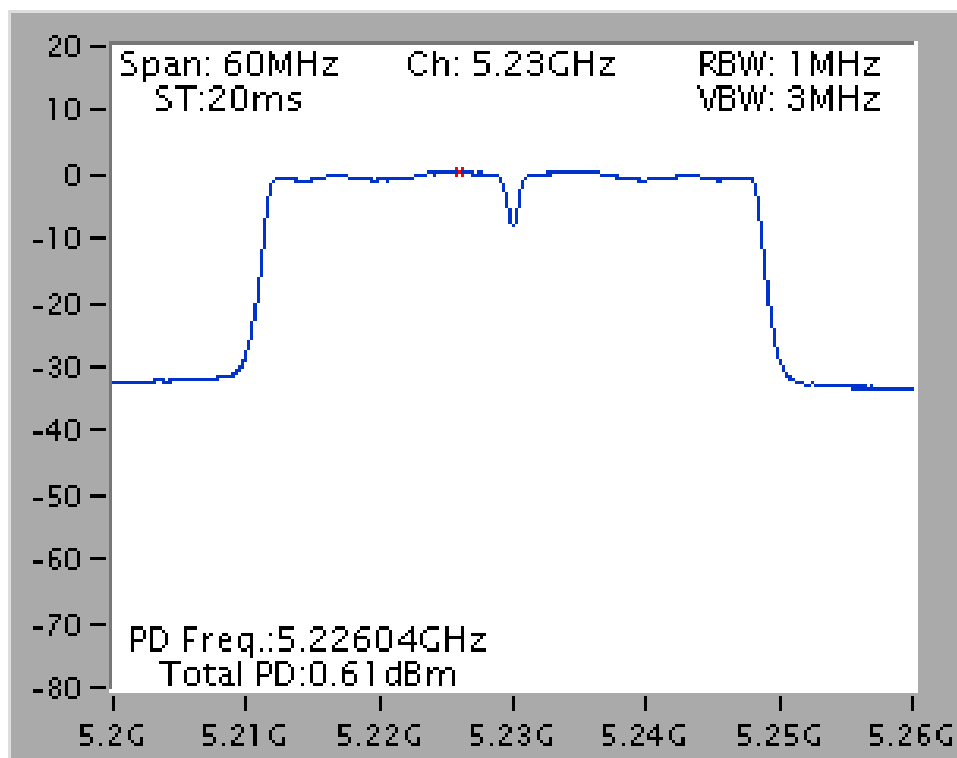


Power Density Plot on Configuration IEEE 802.11ac MCS0 VHT 20MHz / Ant. 2 + Ant. 3 / 5200 MHz

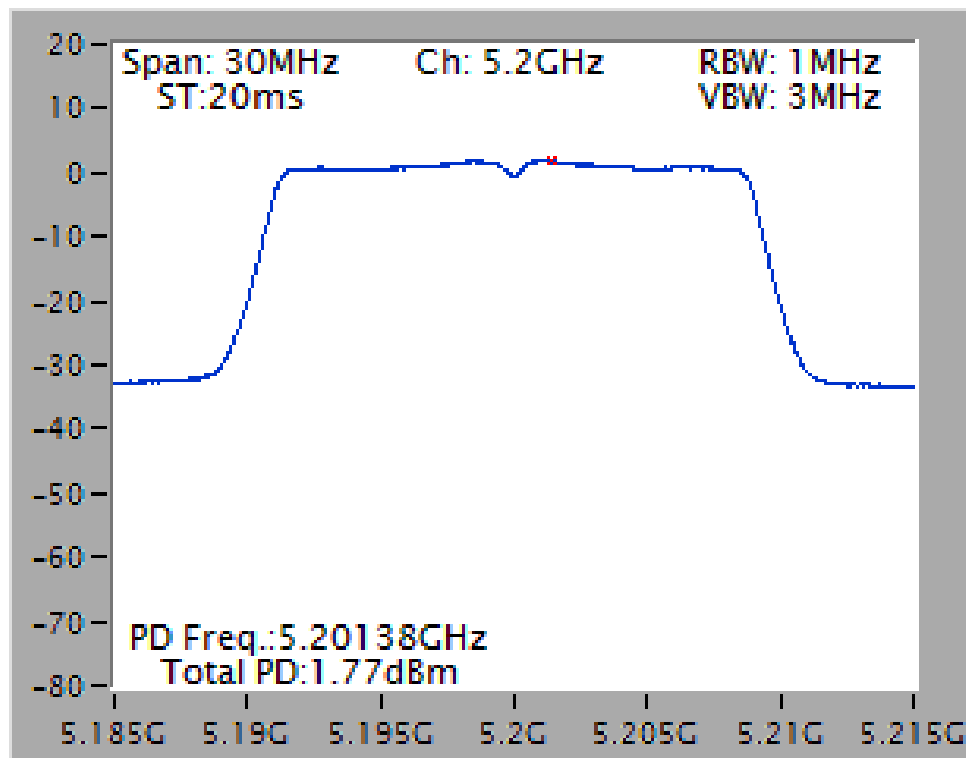


Power Density Plot on Configuration IEEE 802.11ac MCS0 VHT 40MHz / Ant. 2 + Ant. 3 / 5230 MHz

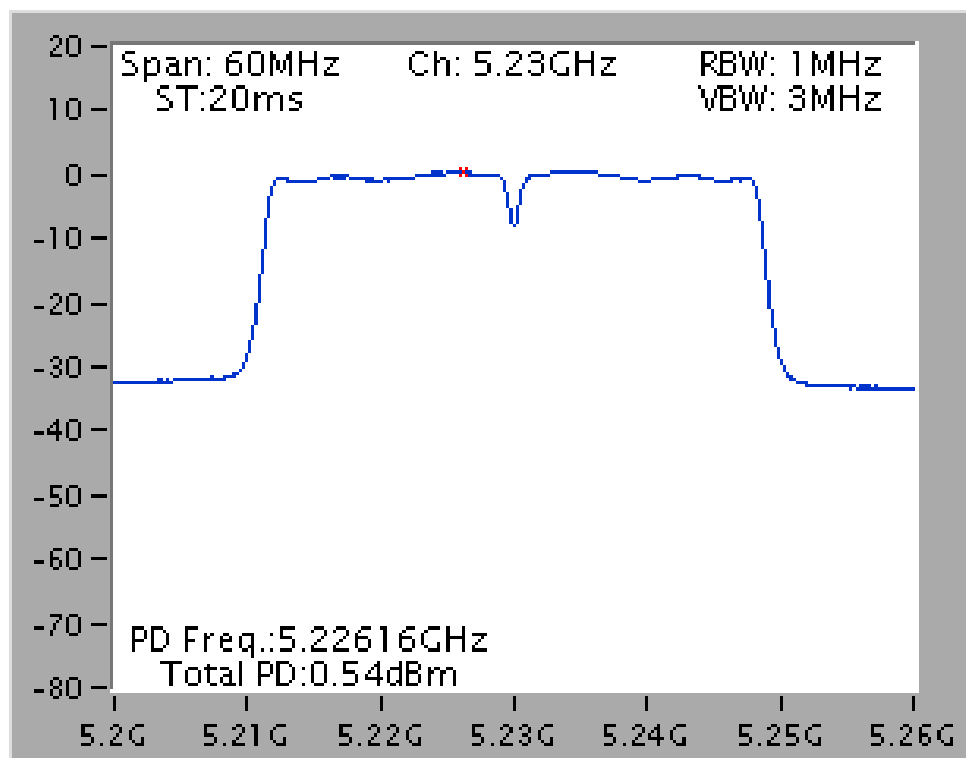

Power Density Plot on Configuration IEEE 802.11ac MCS0 VHT 80MHz / Ant. 2 + Ant. 3 / 5210 MHz

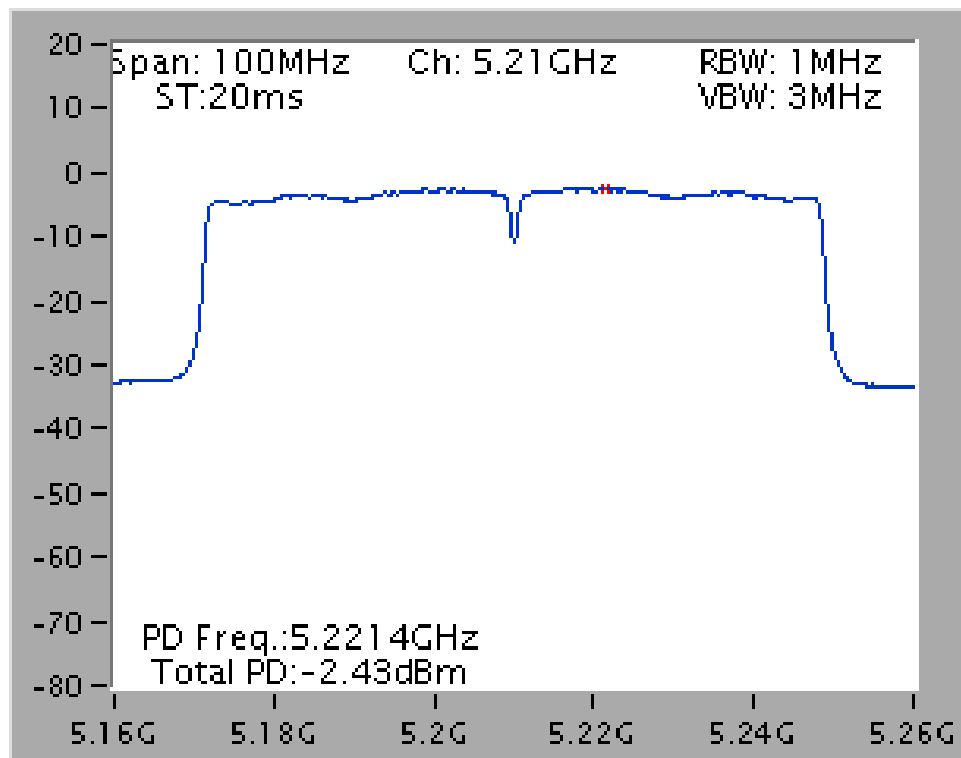

Power Density Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 / 5240 MHz

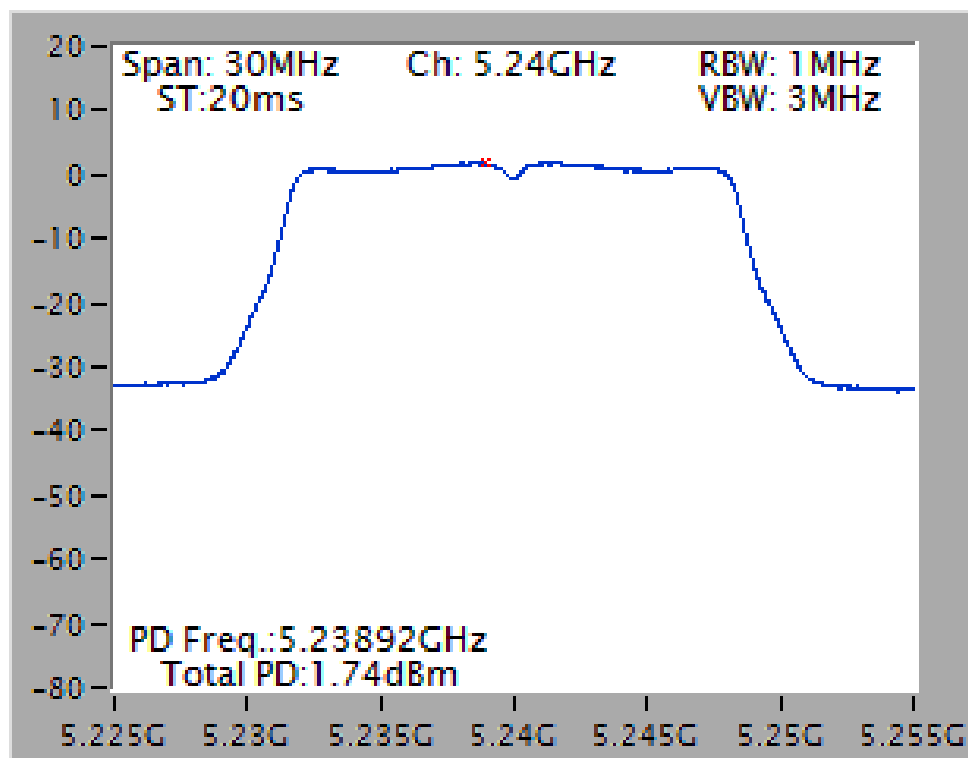

4.5. Peak Excursion Measurement

4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1MHz (Peak Trace) / 1MHz (Average Trace)
VB	$\geq 3\text{MHz}$ (Peak Trace) / $\geq 3\text{MHz}$ (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Trace: Max hold (Peak Trace) / Trace Average Sweep Count 100 (Average Trace)
Sweep Time	AUTO

4.5.3. Test Procedures

- Trace A, Set RBW =1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
- Delta Mark trace A Maximum frequency and trace B same frequency.
- Repeat the above procedure until measurements for all frequencies were complete.
- Testing each modulation mode on a single channel in single operating band at single output port. All signal types need test (DSSS, OFDM). All modulation types need test (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM). All bandwidth modes need test.

4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.4.4.

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Peak Excursion

Temperature	25°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11n/ac

Configuration IEEE 802.11n 20MHz / Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5200MHz	9.24	13	Complies
QPSK(MCS1)	5200MHz	7.22	13	Complies
16QAM(MCS3)	5200MHz	8.68	13	Complies
64QAM(MCS5)	5200MHz	8.59	13	Complies

Configuration IEEE 802.11n 40MHz / Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5190MHz	8.90	13	Complies
QPSK(MCS1)	5190MHz	8.65	13	Complies
16QAM(MCS3)	5190MHz	8.70	13	Complies
64QAM(MCS5)	5190MHz	9.31	13	Complies

Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5210MHz	10.16	13	Complies
QPSK(MCS1)	5210MHz	9.01	13	Complies
16QAM(MCS3)	5210MHz	8.19	13	Complies
64QAM(MCS5)	5210MHz	9.34	13	Complies
256QAM(MCS8)	5210MHz	9.07	13	Complies


Temperature	25°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 2 + Ant. 3

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(6Mbps)	5180MHz	8.81	13	Complies
QPSK(12Mbps)	5180MHz	7.64	13	Complies
16QAM(24Mbps)	5180MHz	7.83	13	Complies
64QAM(48Mbps)	5180MHz	8.70	13	Complies


Note: Only the channel with maximum results was listed in the report.

Peak Excursion Plot on Configuration IEEE 802.11n 20MHz / Ant. 2 + Ant. 3 / 16QAM(MCS3) / 5200 MHz

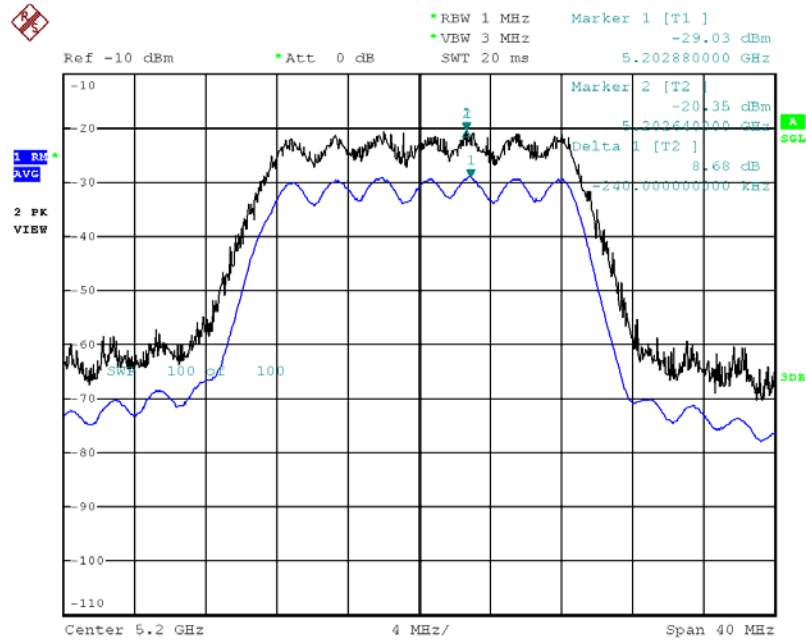


Date: 15.MAY.2013 18:25:45

Peak Excursion Plot on Configuration IEEE 802.11n 40MHz / Ant. 2 + Ant. 3 / 64QAM(MCS5) / 5190 MHz

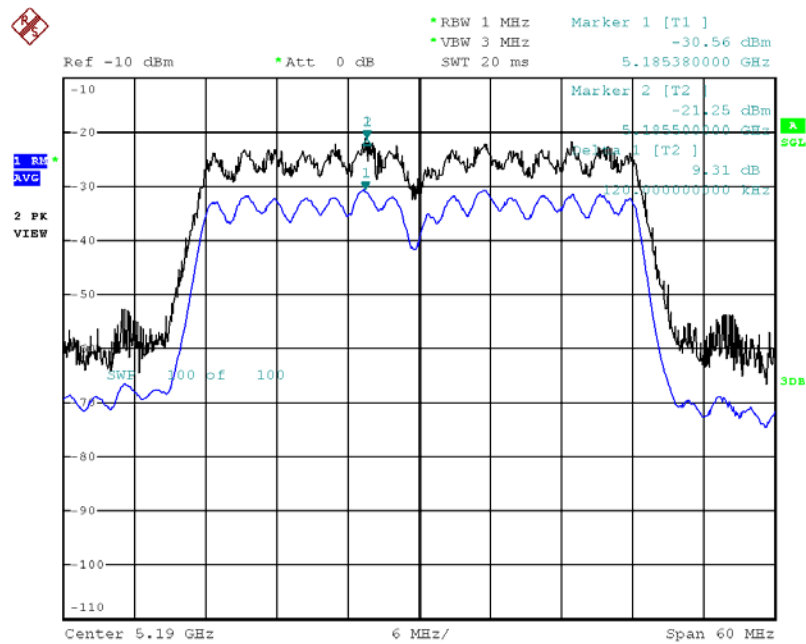


Date: 15.MAY.2013 18:29:51

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / Ant. 2 + Ant. 3 / 64QAM(MCS5) / 5210 MHz

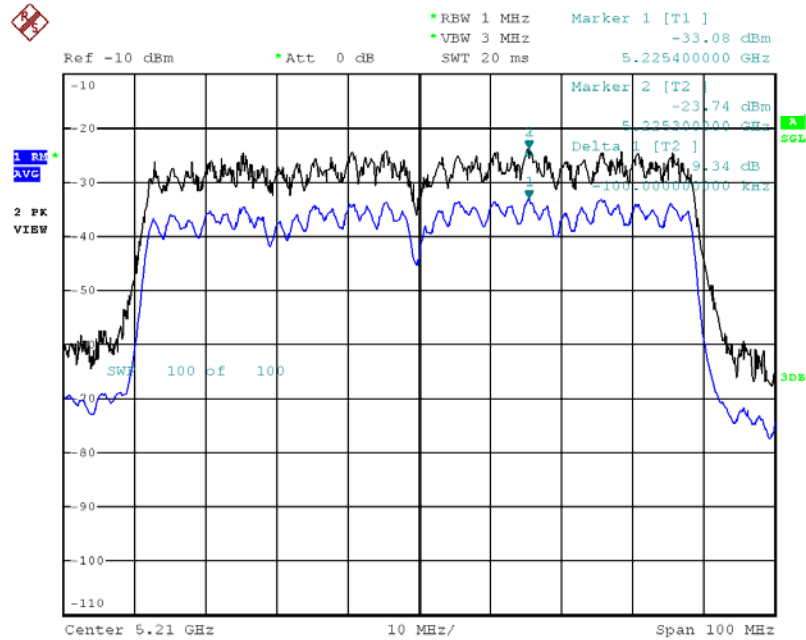

Date: 15.MAY.2013 18:34:23

Peak Excursion Plot on Configuration IEEE 802.11a / Ant. 2 + Ant. 3 / BSPK(6Mbps) / 5180 MHz

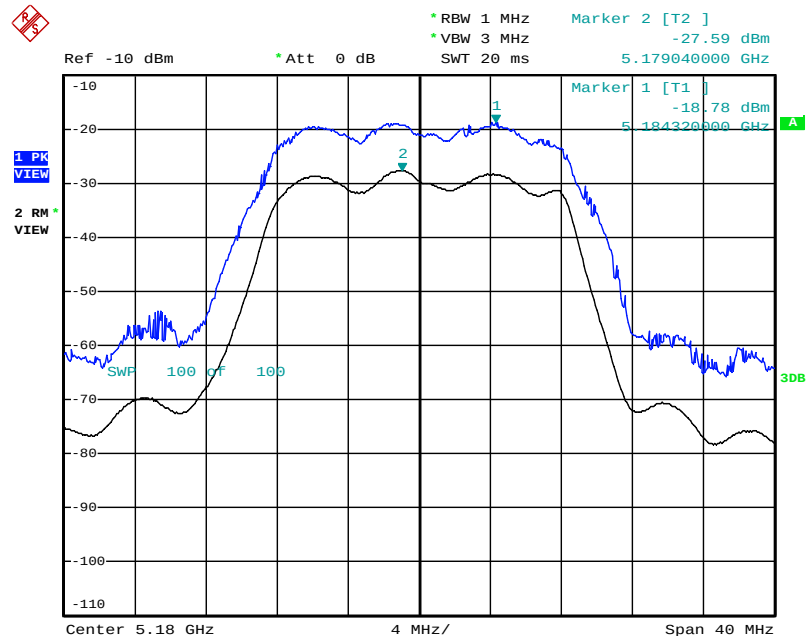

Date: 4.DEC.2012 00:23:19

4.6. Radiated Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 1GHz

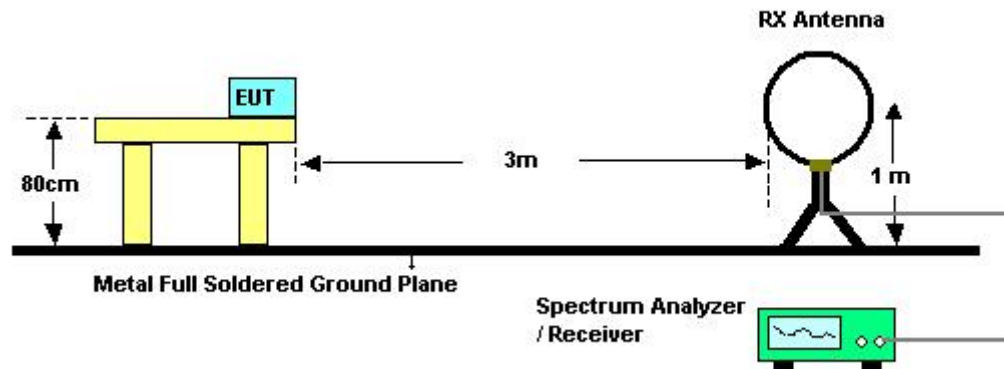

For radiated emissions above 1GHz

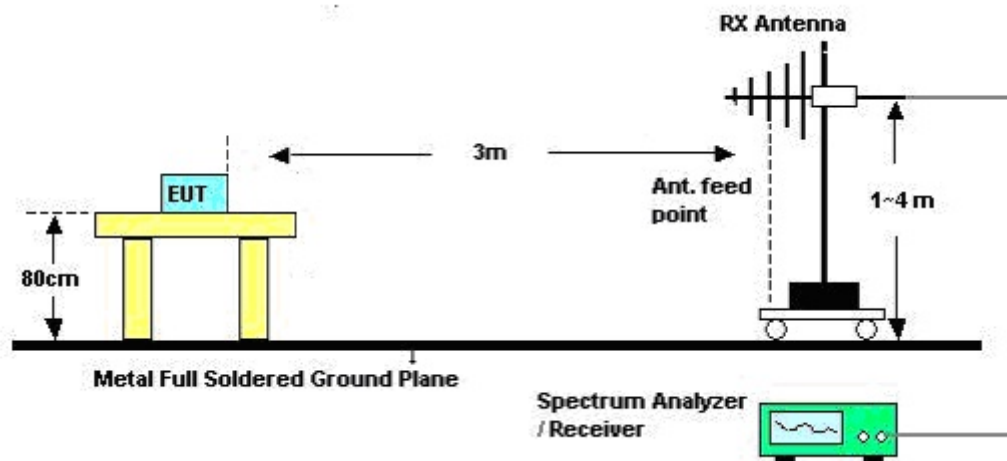

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	Normal Link
Test Date	May 11, 2013		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	Normal Link / Mode 1. Adapter 1 (APD WA-24E12FU)

Horizontal

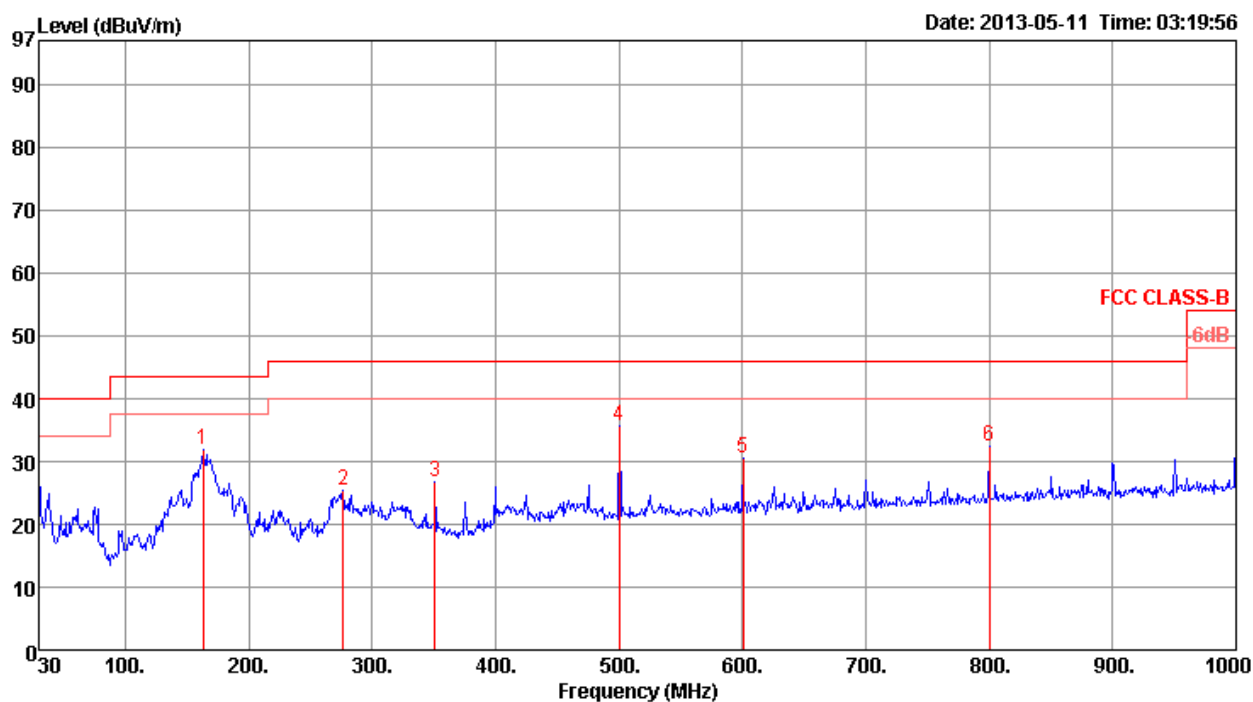

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	162.89	31.88	43.50	-11.62	45.50	1.42	12.25	27.29	Peak	100	0 HORIZONTAL
2	276.38	25.47	46.00	-20.53	37.43	1.91	13.08	26.95	Peak	100	0 HORIZONTAL
3	351.07	26.73	46.00	-19.27	37.14	2.10	14.75	27.26	Peak	100	0 HORIZONTAL
4	500.45	35.71	46.00	-10.29	43.51	2.67	17.63	28.10	Peak	100	0 HORIZONTAL
5	600.36	30.66	46.00	-15.34	37.18	2.81	18.77	28.10	Peak	100	0 HORIZONTAL
6	800.18	32.39	46.00	-13.61	37.00	3.22	19.77	27.60	Peak	100	0 HORIZONTAL

Vertical

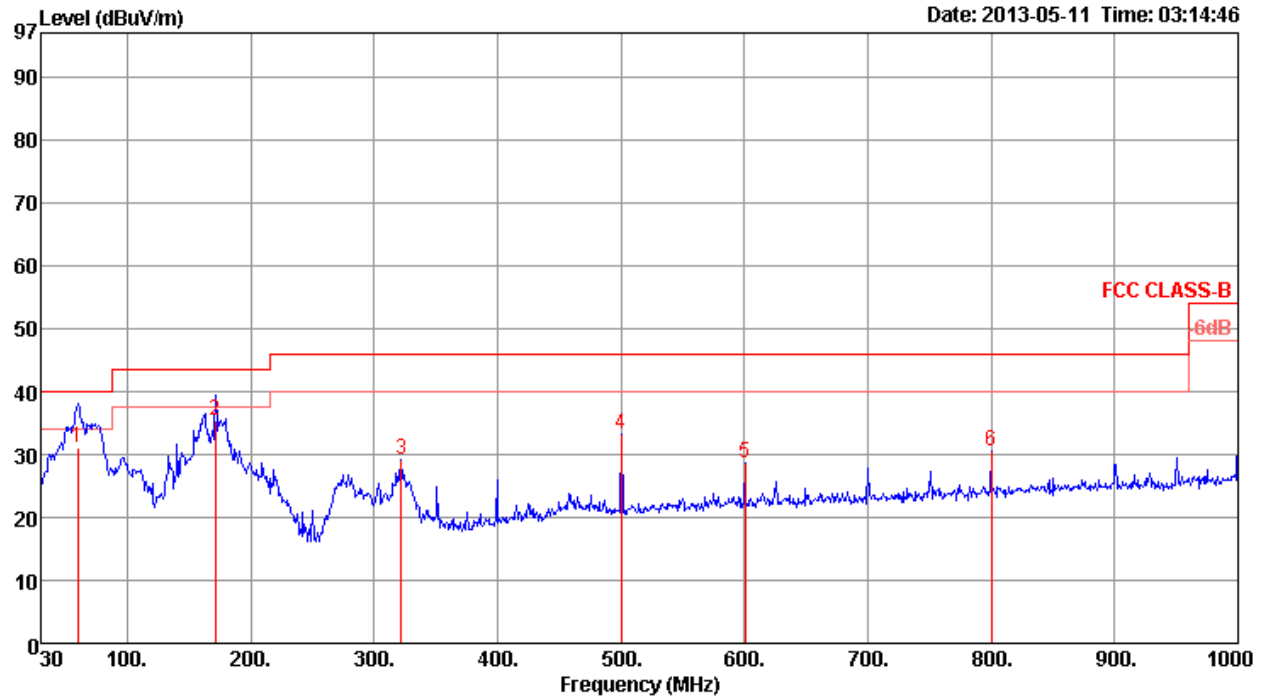

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	60.07	31.12	40.00	-8.88	51.20	0.91	6.77	27.76	QP	100	175 VERTICAL
2	171.62	35.35	43.50	-8.15	48.19	1.50	12.90	27.24	QP	100	243 VERTICAL
3	321.97	29.16	46.00	-16.84	40.19	2.06	13.96	27.05	Peak	400	0 VERTICAL
4	500.45	33.18	46.00	-12.82	40.98	2.67	17.63	28.10	Peak	400	0 VERTICAL
5	600.36	28.57	46.00	-17.43	35.09	2.81	18.77	28.10	Peak	400	0 VERTICAL
6	800.18	30.62	46.00	-15.38	35.23	3.22	19.77	27.60	Peak	400	0 VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24.5°C	Humidity	57%
Test Engineer	Kenneth Huang	Configurations	Normal Link / Mode 2. Adapter 2 (HON-KWANG HK-AX-120A200-US)

Horizontal

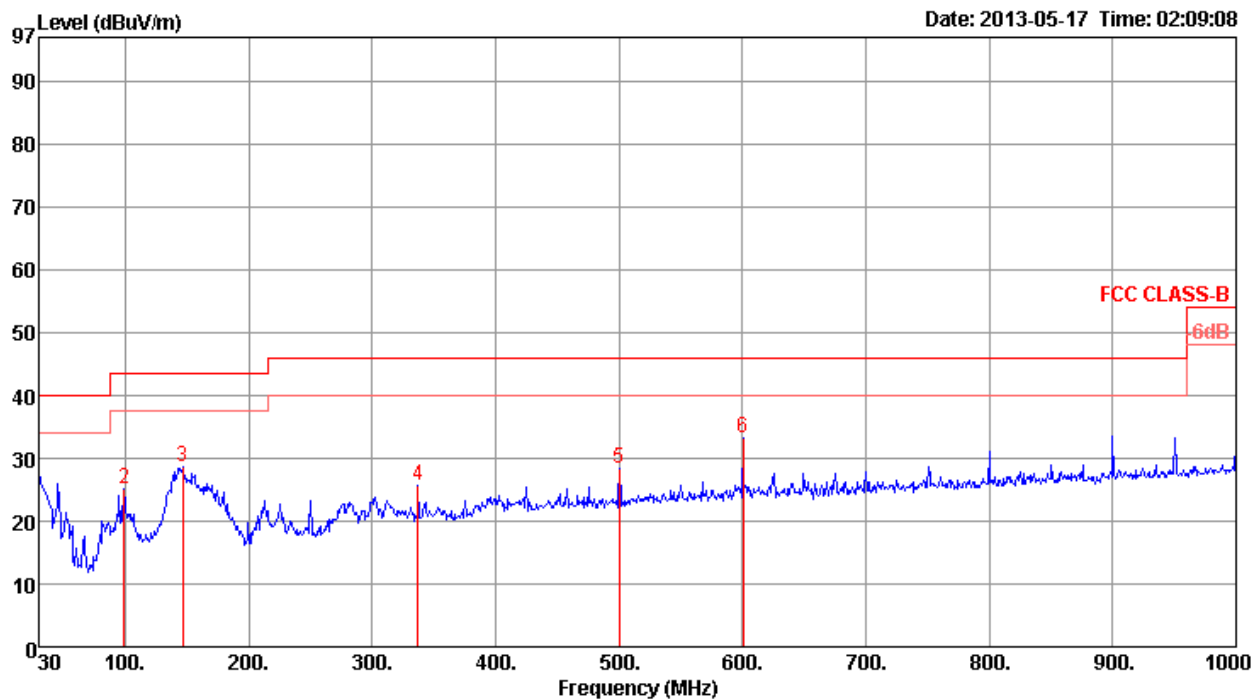

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	30.00	27.62	40.00	-12.38	36.05	0.61	18.76	27.80	Peak	100	0 HORIZONTAL
2	98.87	25.02	43.50	-18.48	40.67	1.17	10.79	27.61	Peak	100	0 HORIZONTAL
3	146.40	28.54	43.50	-14.96	42.46	1.42	12.03	27.37	Peak	100	0 HORIZONTAL
4	337.49	25.71	46.00	-20.29	36.41	2.08	14.38	27.16	Peak	100	0 HORIZONTAL
5	500.45	28.27	46.00	-17.73	36.07	2.67	17.63	28.10	Peak	100	0 HORIZONTAL
6	600.36	33.12	46.00	-12.88	39.64	2.81	18.77	28.10	Peak	100	0 HORIZONTAL

Vertical

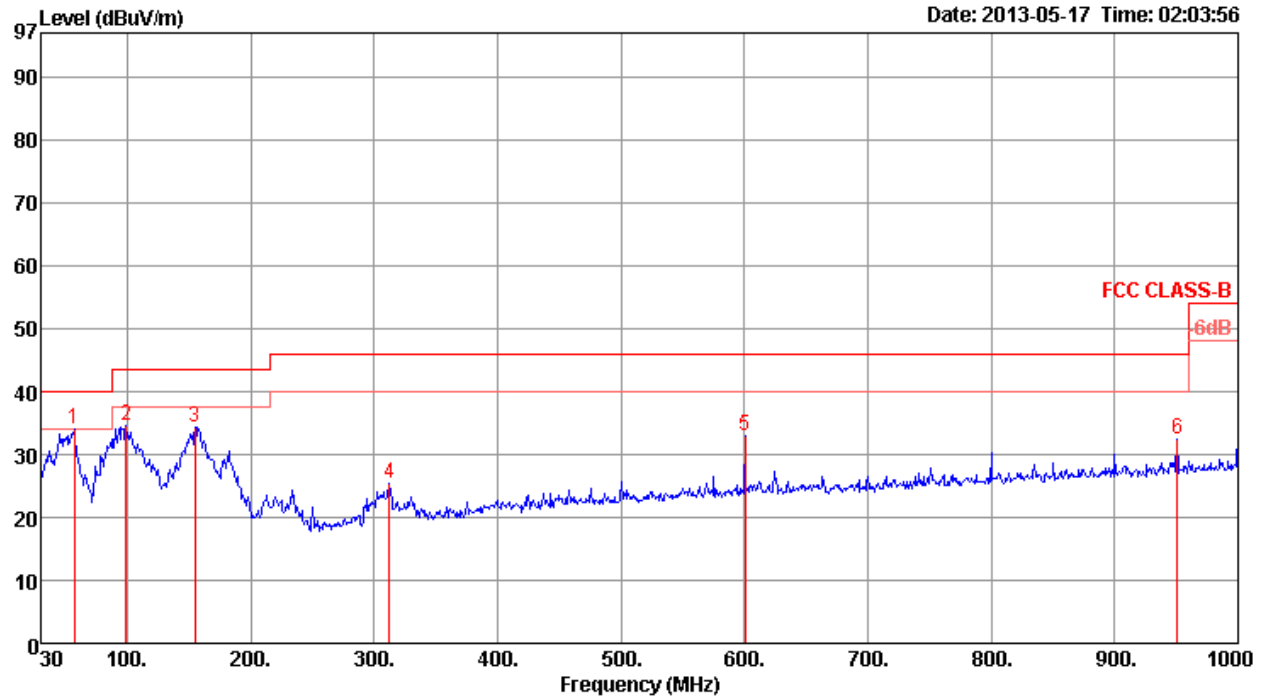

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	57.16	33.97	40.00	-6.03	53.57	0.87	7.30	27.77	Peak	400	0 VERTICAL
2	98.87	34.49	43.50	-9.01	50.14	1.17	10.79	27.61	Peak	400	0 VERTICAL
3	155.13	34.22	43.50	-9.28	48.19	1.41	11.94	27.32	Peak	400	0 VERTICAL
4	312.27	25.40	46.00	-20.60	36.63	2.05	13.70	26.98	Peak	400	0 VERTICAL
5	600.36	32.84	46.00	-13.16	39.36	2.81	18.77	28.10	Peak	400	0 VERTICAL
6	950.53	32.43	46.00	-13.57	35.20	3.52	20.91	27.20	Peak	400	0 VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24.5°C	Humidity	57%
Test Engineer	Kenneth Huang	Configurations	Normal Link / Mode 3. Adapter 3 (HON-KWANG HK-AX-120A200-CP)

Horizontal

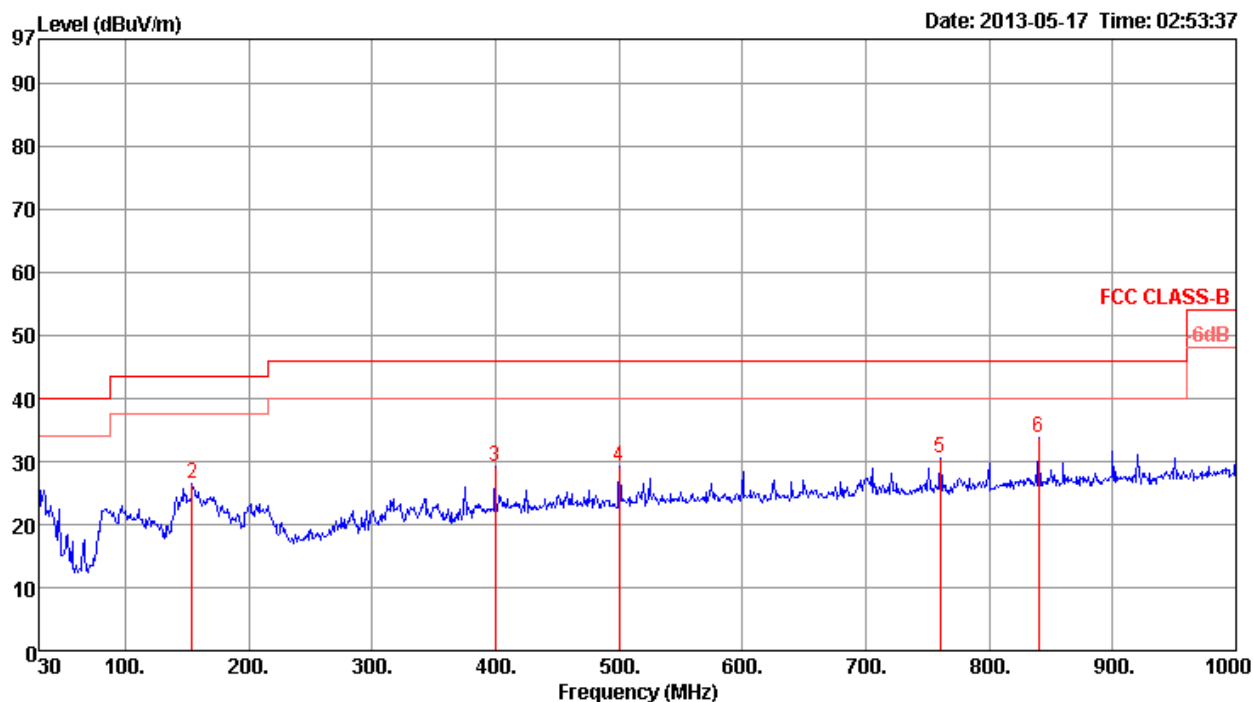

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	30.00	26.24	40.00	-13.76	34.67	0.61	18.76	27.80	Peak	100	0 HORIZONTAL
2	154.16	26.53	43.50	-16.97	40.53	1.41	11.92	27.33	Peak	100	0 HORIZONTAL
3	399.57	29.26	46.00	-16.74	38.50	2.30	16.06	27.60	Peak	100	0 HORIZONTAL
4	500.45	29.29	46.00	-16.71	37.09	2.67	17.63	28.10	Peak	100	0 HORIZONTAL
5	760.41	30.47	46.00	-15.53	35.53	3.20	19.50	27.76	Peak	100	0 HORIZONTAL
6	839.95	33.83	46.00	-12.17	37.94	3.34	20.07	27.52	Peak	100	0 HORIZONTAL

Vertical

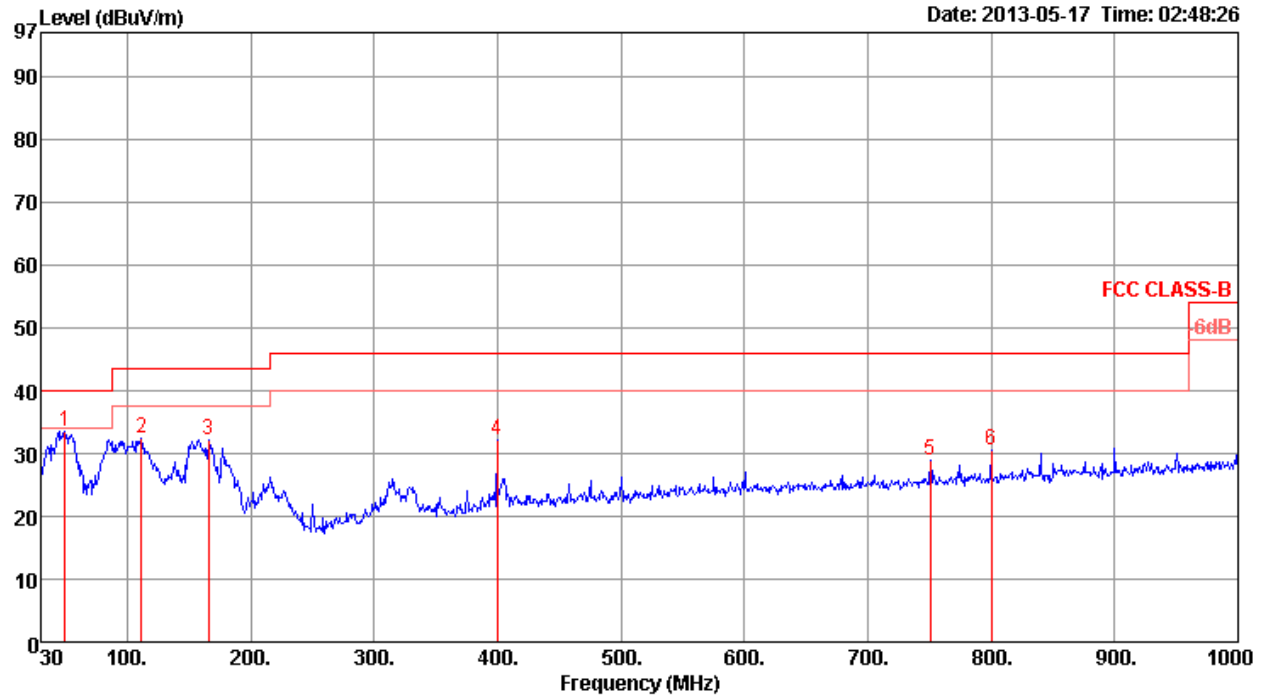

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	49.40	33.59	40.00	-6.41	51.71	0.85	8.83	27.80	Peak	400	0 VERTICAL
2	111.48	32.35	43.50	-11.15	46.78	1.24	11.87	27.54	Peak	400	0 VERTICAL
3	165.80	32.03	43.50	-11.47	45.38	1.45	12.47	27.27	Peak	400	0 VERTICAL
4	399.57	32.04	46.00	-13.96	41.28	2.30	16.06	27.60	Peak	400	0 VERTICAL
5	750.71	29.04	46.00	-16.96	34.21	3.20	19.43	27.80	Peak	400	0 VERTICAL
6	800.18	30.54	46.00	-15.46	35.15	3.22	19.77	27.60	Peak	400	0 VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24.5°C	Humidity	57%
Test Engineer	Kenneth Huang	Configurations	Normal Link / Mode 4. Adapter 4 (SOLYTECH CAD2412)

Horizontal

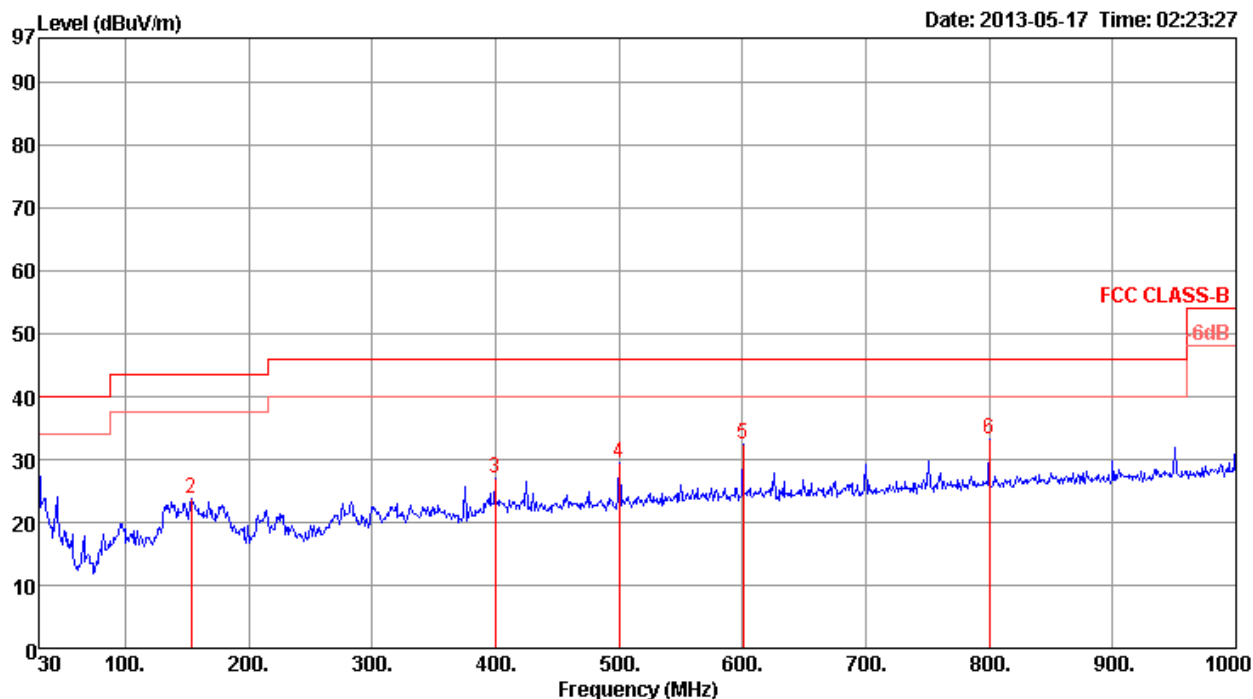

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	30.00	27.82	40.00	-12.18	36.25	0.61	18.76	27.80	Peak	100	0 HORIZONTAL
2	153.19	23.70	43.50	-19.80	37.72	1.41	11.90	27.33	Peak	100	0 HORIZONTAL
3	399.57	27.13	46.00	-18.87	36.37	2.30	16.06	27.60	Peak	100	0 HORIZONTAL
4	500.45	29.49	46.00	-16.51	37.29	2.67	17.63	28.10	Peak	100	0 HORIZONTAL
5	600.36	32.34	46.00	-13.66	38.86	2.81	18.77	28.10	Peak	100	0 HORIZONTAL
6	800.18	33.16	46.00	-12.84	37.77	3.22	19.77	27.60	Peak	100	0 HORIZONTAL

Vertical

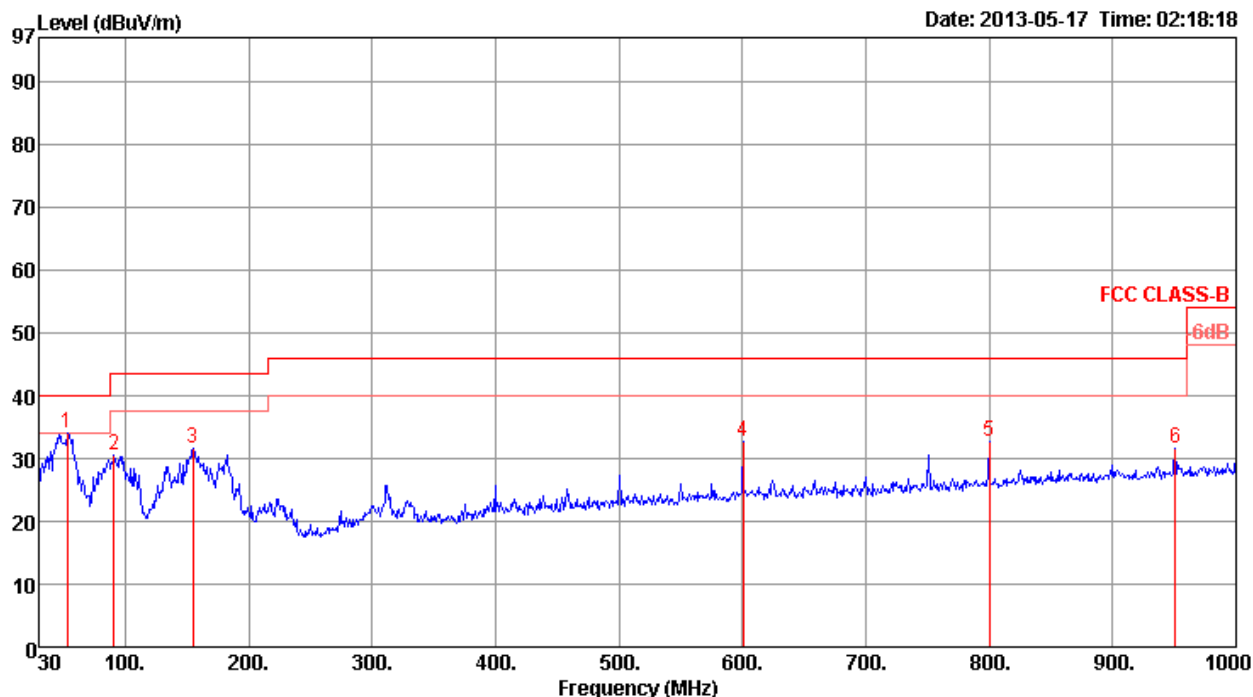

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	53.28	33.93	40.00	-6.07	52.87	0.85	8.00	27.79	Peak	400	0 VERTICAL
2	91.11	30.45	43.50	-13.05	47.84	1.07	9.18	27.64	Peak	400	0 VERTICAL
3	155.13	31.53	43.50	-11.97	45.50	1.41	11.94	27.32	Peak	400	0 VERTICAL
4	600.36	32.69	46.00	-13.31	39.21	2.81	18.77	28.10	Peak	400	0 VERTICAL
5	800.18	32.72	46.00	-13.28	37.33	3.22	19.77	27.60	Peak	400	0 VERTICAL
6	950.53	31.51	46.00	-14.49	34.28	3.52	20.91	27.20	Peak	400	0 VERTICAL

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24.5°C	Humidity	57%
Test Engineer	Kenneth Huang	Configurations	Normal Link / Mode 5. Adapter 5 (LEI MU24-S120200-A1)

Horizontal

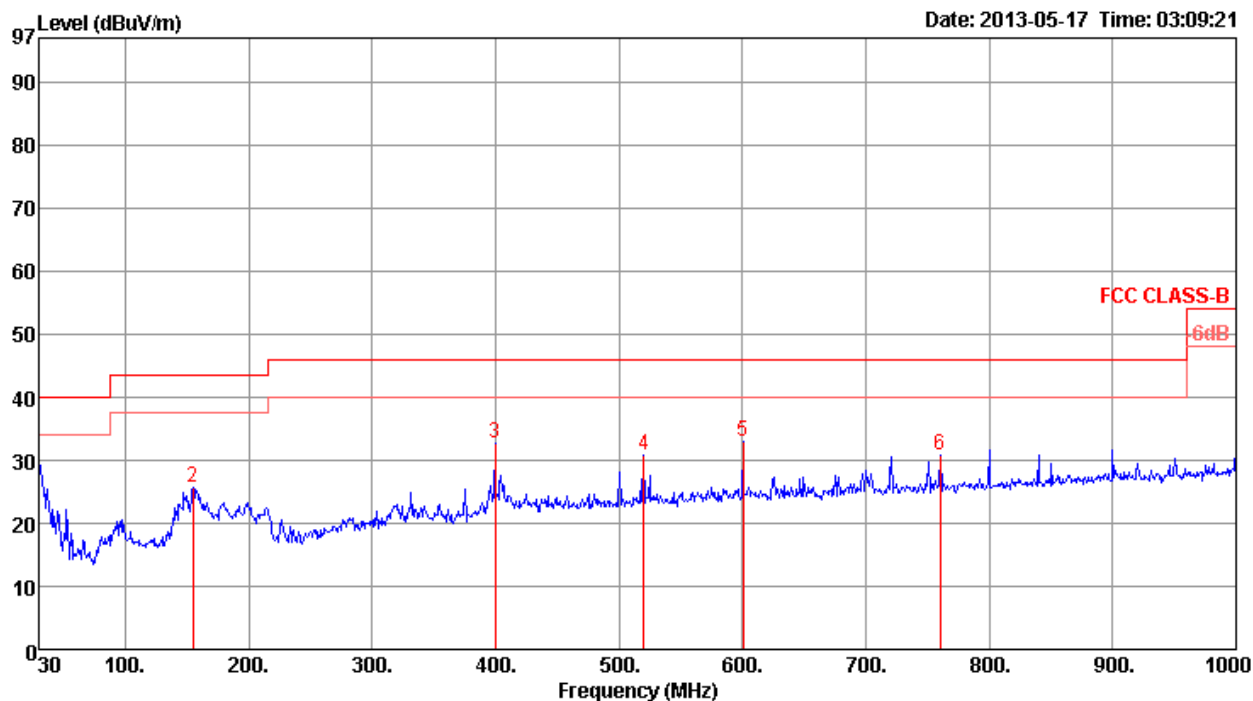

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	30.00	30.83	40.00	-9.17	39.26	0.61	18.76	27.80	Peak	100	0 HORIZONTAL
2	155.13	25.75	43.50	-17.75	39.72	1.41	11.94	27.32	Peak	100	0 HORIZONTAL
3	399.57	32.73	46.00	-13.27	41.97	2.30	16.06	27.60	Peak	100	0 HORIZONTAL
4	519.85	30.92	46.00	-15.08	38.46	2.71	17.85	28.10	Peak	100	0 HORIZONTAL
5	600.36	32.99	46.00	-13.01	39.51	2.81	18.77	28.10	Peak	100	0 HORIZONTAL
6	760.41	30.71	46.00	-15.29	35.77	3.20	19.50	27.76	Peak	100	0 HORIZONTAL

Vertical

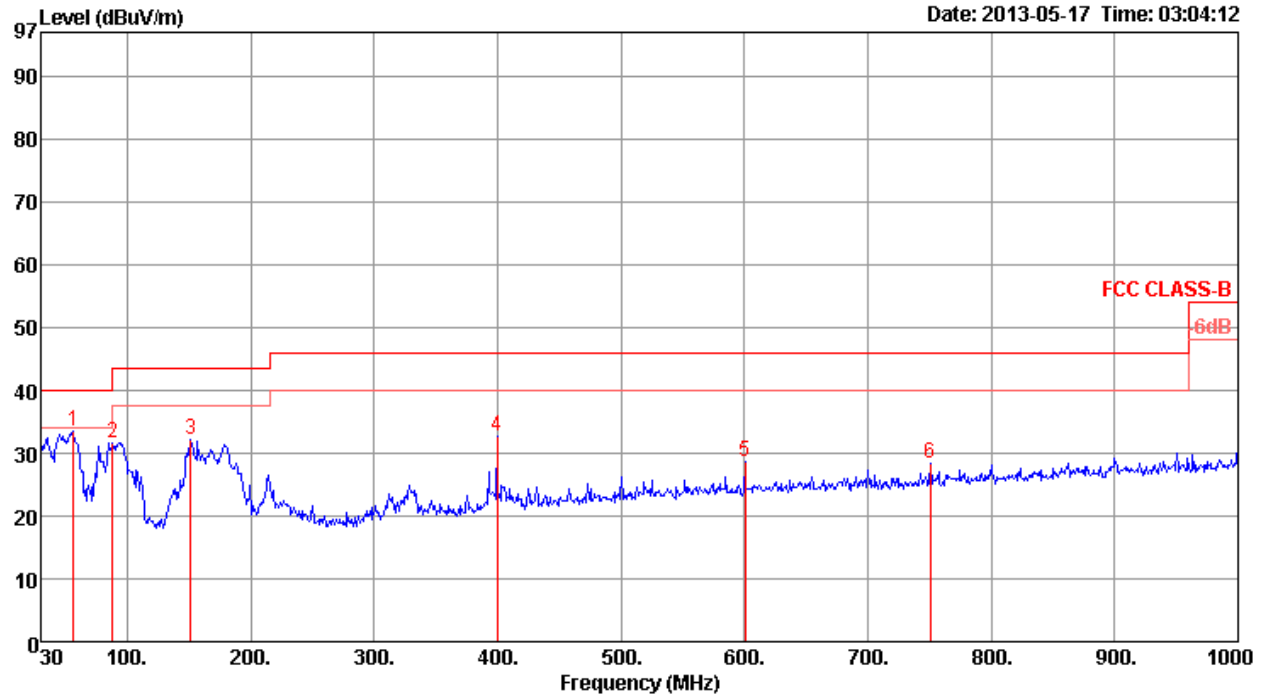

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	56.19	33.41	40.00	-6.59	52.87	0.85	7.47	27.78	400	0	VERTICAL
2	88.20	31.74	43.50	-11.76	49.69	1.08	8.62	27.65	400	0	VERTICAL
3	151.25	32.15	43.50	-11.35	46.21	1.41	11.87	27.34	400	0	VERTICAL
4	399.57	32.76	46.00	-13.24	42.00	2.30	16.06	27.60	400	0	VERTICAL
5	600.36	28.59	46.00	-17.41	35.11	2.81	18.77	28.10	400	0	VERTICAL
6	750.71	28.32	46.00	-17.68	33.49	3.20	19.43	27.80	400	0	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 HT20MHz Ch 36 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15537.56	53.80	74.00	-20.20	45.29	6.13	37.67	35.29	100	285	HORIZONTAL
2	15538.88	40.00	54.00	-14.00	31.53	6.13	37.65	35.31	100	285	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15541.27	40.34	54.00	-13.66	31.83	6.13	37.69	35.31	100	38	VERTICAL
2	15542.17	53.48	74.00	-20.52	44.97	6.13	37.69	35.31	100	38	VERTICAL

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 HT20MHz Ch 40 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15599.72	39.92	54.00	-14.08	31.53	6.13	37.60	35.34	Average	100	158	HORIZONTAL
2	15601.64	53.81	74.00	-20.19	45.42	6.13	37.60	35.34	Peak	100	158	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15600.55	53.82	74.00	-20.18	45.43	6.13	37.60	35.34	Peak	100	30	VERTICAL
2	15601.30	39.97	54.00	-14.03	31.58	6.13	37.60	35.34	Average	100	30	VERTICAL

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 HT20MHz Ch 48 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	15720.66	39.80	54.00	-14.20	31.57	6.14	37.48	35.39	Average	100	204 HORIZONTAL
2	15721.67	53.29	74.00	-20.71	45.06	6.14	37.48	35.39	Peak	100	204 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	15719.22	54.76	74.00	-19.24	46.53	6.14	37.48	35.39	Peak	100	299 VERTICAL
2	15721.25	40.19	54.00	-13.81	31.96	6.14	37.48	35.39	Average	100	299 VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 HT40MHz Ch 38 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15568.45	40.67	54.00	-13.33	32.24	6.13	37.63	35.33	Average	100	14	HORIZONTAL
2	15569.37	54.67	74.00	-19.33	46.24	6.13	37.63	35.33	Peak	100	14	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	15569.58	40.71	54.00	-13.29	32.26	6.13	37.65	35.33	Average	100	140	VERTICAL
2	15572.02	54.51	74.00	-19.49	46.10	6.13	37.61	35.33	Peak	100	140	VERTICAL

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 HT40MHz Ch 46 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15690.02	53.10	74.00	-20.90	44.82	6.14	37.51	35.37	Peak	100	13	HORIZONTAL
2	15691.39	40.24	54.00	-13.76	31.99	6.14	37.49	35.38	Average	100	13	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15688.97	40.60	54.00	-13.40	32.32	6.14	37.51	35.37	Average	100	349	VERTICAL
2	15691.58	53.25	74.00	-20.75	45.00	6.14	37.49	35.38	Peak	100	349	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac MCS0 VHT80MHz Ch 42 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15627.64	40.66	54.00	-13.34	32.31	6.14	37.56	35.35	Average	100	319	HORIZONTAL
2	15629.58	55.20	74.00	-18.80	46.85	6.14	37.56	35.35	Peak	100	319	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15626.12	40.71	54.00	-13.29	32.36	6.14	37.56	35.35	Average	100	157	VERTICAL
2	15627.64	54.35	74.00	-19.65	46.00	6.14	37.56	35.35	Peak	100	157	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a Ch 36 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	15538.37	40.04	54.00	-13.96	31.57	6.13	37.65	35.31	Average	100	114 HORIZONTAL
2	15539.01	54.00	74.00	-20.00	45.53	6.13	37.65	35.31	Peak	100	114 HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg
1	15540.96	53.56	74.00	-20.44	45.05	6.13	37.69	35.31	Peak	100	280 VERTICAL
2	15541.86	42.17	54.00	-11.83	33.66	6.13	37.69	35.31	Average	100	280 VERTICAL

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a Ch 40 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15598.26	53.93	74.00	-20.07	45.54	6.13	37.60	35.34	Peak	100	17 HORIZONTAL
2	15599.98	40.01	54.00	-13.99	31.62	6.13	37.60	35.34	Average	100	17 HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	15597.57	53.94	74.00	-20.06	45.55	6.13	37.60	35.34	Peak	100	157 VERTICAL
2	15597.70	42.26	54.00	-11.74	33.87	6.13	37.60	35.34	Average	100	157 VERTICAL

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a Ch 48 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15718.23	53.51	74.00	-20.49	45.28	6.14	37.48	35.39	100	181	HORIZONTAL
2	15719.62	39.76	54.00	-14.24	31.53	6.14	37.48	35.39	100	181	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15718.17	53.74	74.00	-20.26	45.51	6.14	37.48	35.39	100	307	VERTICAL
2	15718.56	40.39	54.00	-13.61	32.16	6.14	37.48	35.39	100	307	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 20MHz Ch 36, 40, 48 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Channel 36

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	5149.20	70.17	74.00	-3.83	33.07	3.43	33.67	0.00	Peak	100	282	VERTICAL
2	5149.80	52.94	54.00	-1.06	15.84	3.43	33.67	0.00	Average	100	282	VERTICAL
3	5177.60	113.05			75.88	3.44	33.73	0.00	Peak	100	282	VERTICAL
4	5182.20	101.36			64.19	3.44	33.73	0.00	Average	100	282	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	5122.40	48.47	54.00	-5.53	11.43	3.43	33.61	0.00	Average	100	281	VERTICAL
2	5122.40	60.02	74.00	-13.98	22.98	3.43	33.61	0.00	Peak	100	281	VERTICAL
3	5198.40	112.59			75.38	3.45	33.76	0.00	Peak	100	281	VERTICAL
4	5202.40	101.49			64.28	3.45	33.76	0.00	Average	100	281	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	5121.80	41.69	54.00	-12.31	4.65	3.43	33.61	0.00	Average	100	278	VERTICAL
2	5123.00	54.81	74.00	-19.19	17.77	3.43	33.61	0.00	Peak	100	278	VERTICAL
3	5241.80	113.83			76.55	3.46	33.82	0.00	Peak	100	278	VERTICAL
4	5242.40	101.95			64.67	3.46	33.82	0.00	Average	100	278	VERTICAL
5	5358.40	42.62	54.00	-11.38	5.10	3.49	34.03	0.00	Average	100	278	VERTICAL
6	5362.00	54.71	74.00	-19.29	17.19	3.49	34.03	0.00	Peak	100	278	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11n MCS0 40MHz Ch 38, 46 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Channel 38

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	5149.60	53.43	54.00	-0.57	16.33	3.43	33.67	0.00	Average	100	284	VERTICAL
2	5150.00	66.92	74.00	-7.08	29.82	3.43	33.67	0.00	Peak	100	284	VERTICAL
3	5194.40	93.51			56.34	3.44	33.73	0.00	Average	100	284	VERTICAL
4	5204.40	105.92			68.71	3.45	33.76	0.00	Peak	100	284	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
			dBuV/m	dB	dBuV	dB	dB/m	dB				
1	5144.87	66.44	74.00	-7.56	29.34	3.43	33.67	0.00	Peak	100	274	VERTICAL
2	5147.44	51.79	54.00	-2.21	14.69	3.43	33.67	0.00	Average	100	274	VERTICAL
3	5217.82	112.24			75.00	3.45	33.79	0.00	Peak	100	274	VERTICAL
4	5234.49	100.33			63.05	3.46	33.82	0.00	Average	100	274	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac MCS0 VHT20MHz Ch 36, 40, 48 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5147.76	69.96	74.00	-4.04	32.86	3.43	33.67	0.00	Peak	100	276	VERTICAL
2	5150.00	52.16	54.00	-1.84	15.06	3.43	33.67	0.00	Average	100	276	VERTICAL
3	5182.08	102.19			65.02	3.44	33.73	0.00	Average	100	276	VERTICAL
4	5184.81	113.61			76.44	3.44	33.73	0.00	Peak	100	276	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5122.44	50.88	54.00	-3.12	13.84	3.43	33.61	0.00	Average	100	278	VERTICAL
2	5150.00	62.92	74.00	-11.08	25.82	3.43	33.67	0.00	Peak	100	278	VERTICAL
3	5202.24	104.32			67.11	3.45	33.76	0.00	Average	100	278	VERTICAL
4	5202.56	115.86			78.65	3.45	33.76	0.00	Peak	100	278	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5114.42	43.38	54.00	-10.62	6.35	3.42	33.61	0.00	Average	100	277	VERTICAL
2	5128.85	56.45	74.00	-17.55	19.38	3.43	33.64	0.00	Peak	100	277	VERTICAL
3	5241.92	103.65			66.37	3.46	33.82	0.00	Average	100	277	VERTICAL
4	5241.92	115.04			77.76	3.46	33.82	0.00	Peak	100	277	VERTICAL
5	5351.44	54.57	74.00	-19.43	17.05	3.49	34.03	0.00	Peak	100	277	VERTICAL
6	5357.21	42.83	54.00	-11.17	5.31	3.49	34.03	0.00	Average	100	277	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac MCS0 VHT40MHz Ch 38, 46 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5149.60	53.37	54.00	-0.63	16.27	3.43	33.67	0.00	Average	100	285 VERTICAL
2	5150.00	67.08	74.00	-6.92	29.98	3.43	33.67	0.00	Peak	100	285 VERTICAL
3	5187.20	93.08			55.91	3.44	33.73	0.00	Average	100	285 VERTICAL
4	5192.00	105.61			68.44	3.44	33.73	0.00	Peak	100	285 VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	5145.83	65.49	74.00	-8.51	28.39	3.43	33.67	0.00	Peak	100	276 VERTICAL
2	5147.76	51.46	54.00	-2.54	14.36	3.43	33.67	0.00	Average	100	276 VERTICAL
3	5234.17	113.04			75.76	3.46	33.82	0.00	Peak	100	276 VERTICAL
4	5234.81	100.72			63.44	3.46	33.82	0.00	Average	100	276 VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11ac MCS0 VHT80MHz Ch 42 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Channel 42

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	
1	5149.00	53.54	54.00	-0.46	16.44	3.43	33.67	0.00	Average	100	284	VERTICAL
2	5150.00	67.15	74.00	-6.85	30.05	3.43	33.67	0.00	Peak	100	284	VERTICAL
3	5220.00	102.07			64.83	3.45	33.79	0.00	Peak	100	284	VERTICAL
4	5222.00	89.08			51.83	3.46	33.79	0.00	Average	100	284	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	IEEE 802.11a Ch 36, 40, 48 / Ant. 2 + Ant. 3
Test Date	Nov. 20, 2012		

Channel 36

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5149.60	52.65	54.00	-1.35	15.55	3.43	33.67	0.00	Average	100	285	VERTICAL
2	5150.00	70.26	74.00	-3.74	33.16	3.43	33.67	0.00	Peak	100	285	VERTICAL
3	5178.60	112.58			75.41	3.44	33.73	0.00	Peak	100	285	VERTICAL
4	5179.00	101.98			64.81	3.44	33.73	0.00	Average	100	285	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5119.20	50.29	54.00	-3.71	13.25	3.43	33.61	0.00	Average	100	281	VERTICAL
2	5119.20	60.89	74.00	-13.11	23.85	3.43	33.61	0.00	Peak	100	281	VERTICAL
3	5198.80	112.91			75.70	3.45	33.76	0.00	Peak	100	281	VERTICAL
4	5199.20	102.33			65.12	3.45	33.76	0.00	Average	100	281	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5121.80	54.22	74.00	-19.78	17.18	3.43	33.61	0.00	Peak	100	289	VERTICAL
2	5123.60	41.70	54.00	-12.30	4.66	3.43	33.61	0.00	Average	100	289	VERTICAL
3	5234.60	113.26			75.98	3.46	33.82	0.00	Peak	100	289	VERTICAL
4	5238.80	102.52			65.24	3.46	33.82	0.00	Average	100	289	VERTICAL
5	5354.20	54.72	74.00	-19.28	17.20	3.49	34.03	0.00	Peak	100	289	VERTICAL
6	5354.80	42.53	54.00	-11.47	5.01	3.49	34.03	0.00	Average	100	289	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.8. Frequency Stability Measurement

4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.

4.8.4. Test Setup Layout

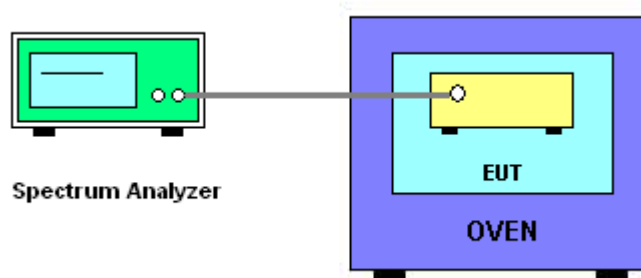

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200
126.50	5199.9862
110.00	5199.9864
93.50	5199.9832
Max. Deviation (MHz)	0.016800
Max. Deviation (ppm)	3.23

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200
-30	5199.9892
-20	5199.9864
-10	5199.9884
0	5199.9878
10	5199.9842
20	5199.9880
30	5199.9878
40	5199.9868
50	5199.9872
Max. Deviation (MHz)	0.015800
Max. Deviation (ppm)	3.04

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov.26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9kHz ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
Capacitive Voltage Probe	SCHAFFNER	CVP2200A	18697	150kHz~30MHz	Oct. 23, 2012	Conduction (CO01-CB)
RF Current Probe	SOLAR.	9208-1	041039	9kHz~30MHz	Sep. 18, 2012	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 03, 2012	Conduction (CO01-CB)
Impedance stabilization network	TESEQ	ISN T400A	24854	150kHz ~ 230MHz	Oct. 22, 2012	Conduction (CO01-CB)
Impedance stabilization network	TESEQ	ISN T800	24557	150kHz ~ 230MHz	Oct. 22, 2012	Conduction (CO01-CB)
Coupling Decoupling Network	TESEQ	ST08	24348	150kHz ~ 230MHz	Dec. 03, 2012	Conduction (CO01-CB)
Current Probe	Kyoritsu	KCT-2504	8S-2773-6	0.1MHz~30MHz	Feb. 08, 2012	Conduction (CO01-CB)
T-ISN	Kyoritsu	KNW-2242	8S-2802-5	0.15MHz~30MHz	Sep. 18, 2012	Conduction (CO01-CB)
EM Koppelzange	TESEQ	KEMZ 801	17029	0.15MHz~30MHz	Sep. 19, 2012	Conduction (CO01-CB)
Coupling and Decoupling Network	TESEQ	ISN PLC 25-30	23390	0.15MHz~30MHz	Sep. 18, 2012	Conduction (CO01-CB)
Coupling and Decoupling Network	TESEQ	ISN PLC 25-25	26476	0.15MHz~30MHz	Feb. 09, 2012	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 4, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-----	-----	Conduction (CO01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Signal Generator	R&S	SMR40	100302	10MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Jan. 11, 2012	Radiation (03CH01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 25, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 22, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Feb. 03, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Mar. 20, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Apr. 15, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Oct. 29, 2012*	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085