


Appendix D. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	24.5°C	Humidity	57%
Test Engineer	Wen Chao	Configurations	2.4G + 5G TX

Horizontal

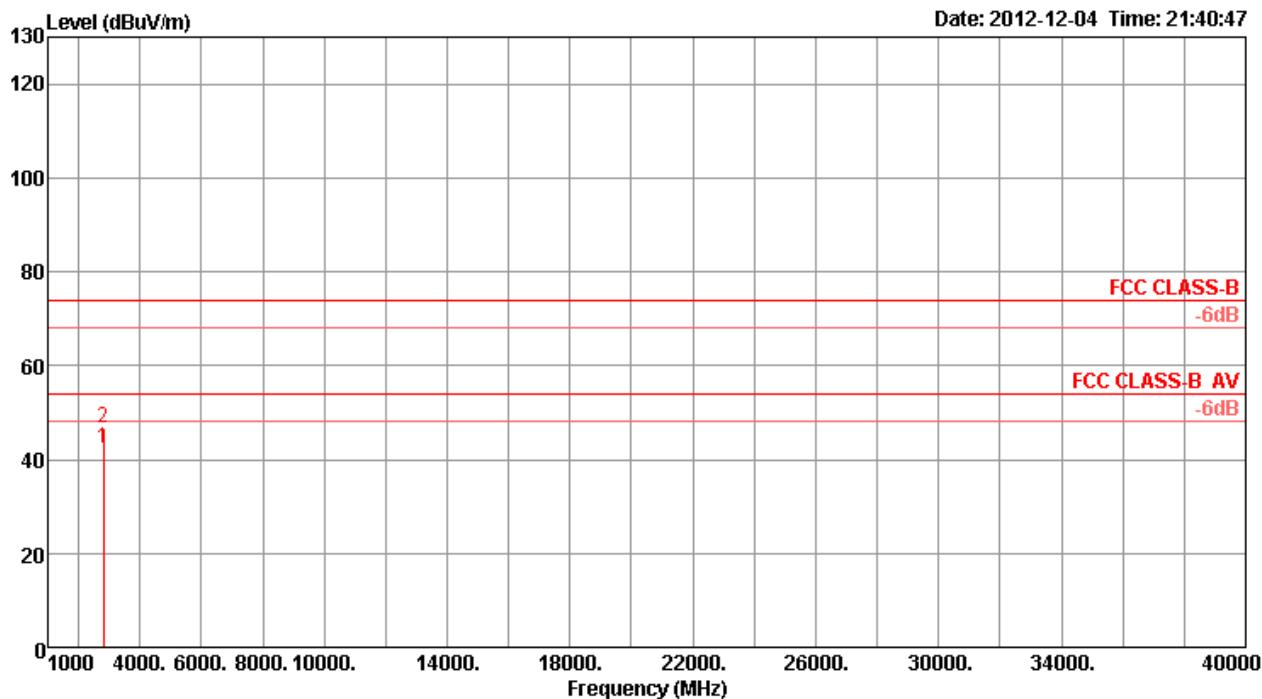

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	2800.00	42.43	54.00	-11.57	43.67	4.62	29.26	35.12	Average	100	146 HORIZONTAL
2	2800.07	46.57	74.00	-27.43	47.81	4.62	29.26	35.12	Peak	100	146 HORIZONTAL

Vertical

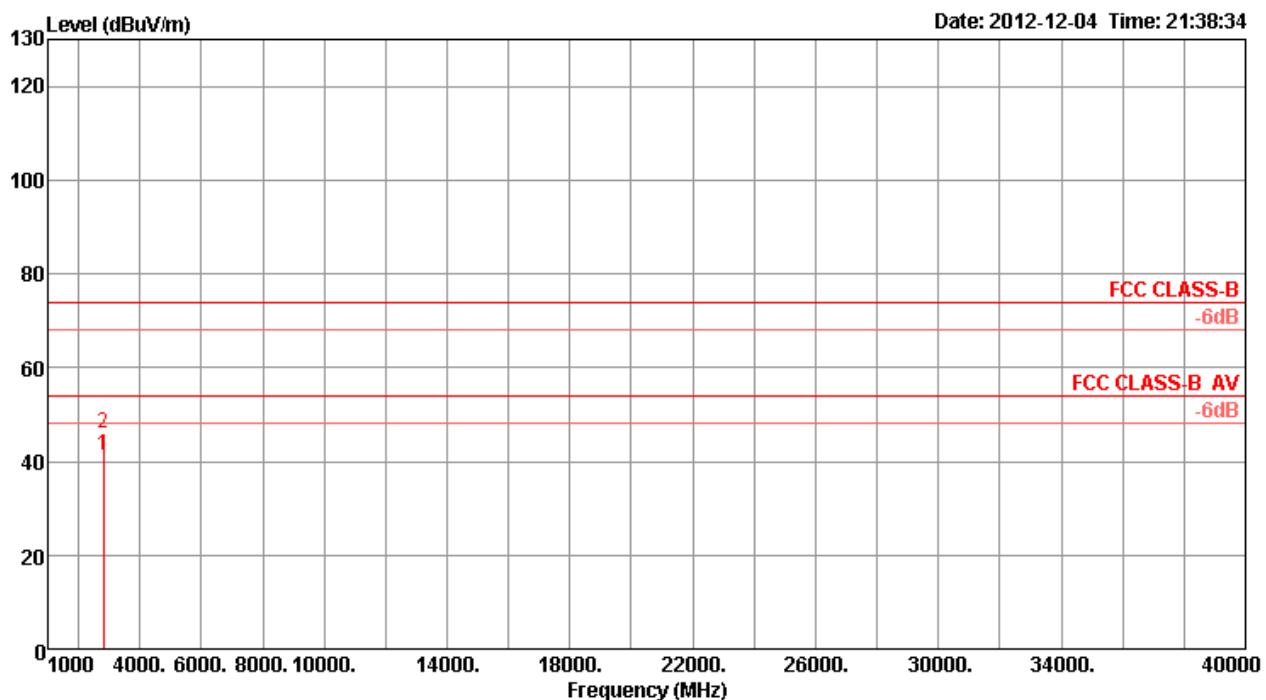

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1	2799.99	41.11	54.00	-12.89	42.35	4.62	29.26	35.12 Average	100	88	VERTICAL
2	2800.04	45.86	74.00	-28.14	47.10	4.62	29.26	35.12 Peak	100	88	VERTICAL