


Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	58%
Test Engineer	Eason Chen	Configurations	2.4G + 5G Band 1 + 5G Band 4

Horizontal

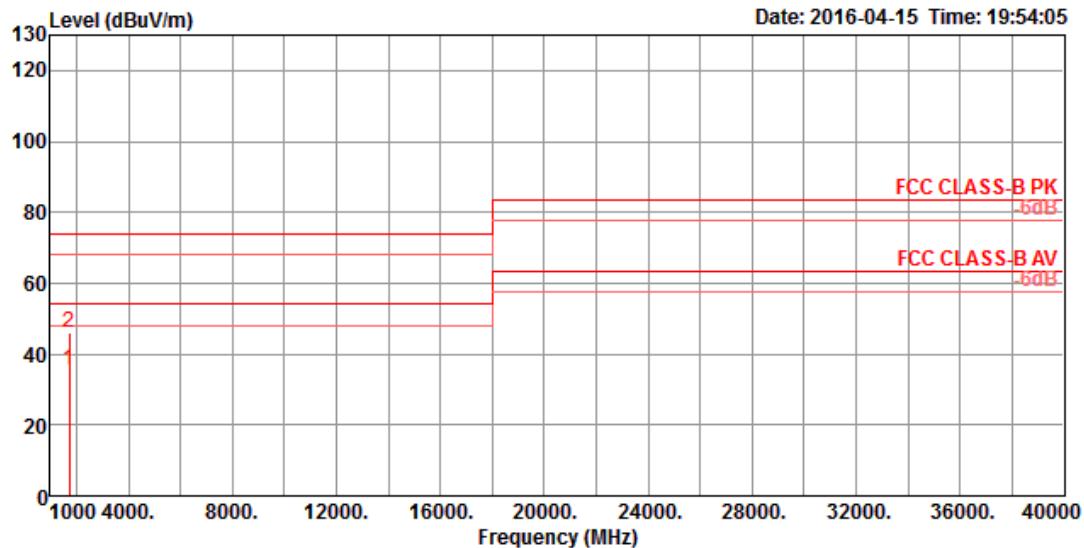

Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1738.52	35.43	54.00	-18.57	37.23	4.25	25.81	31.86	178	132	Average	HORIZONTAL
2	1738.86	46.25	74.00	-27.75	48.05	4.25	25.81	31.86	178	132	Peak	HORIZONTAL

Vertical

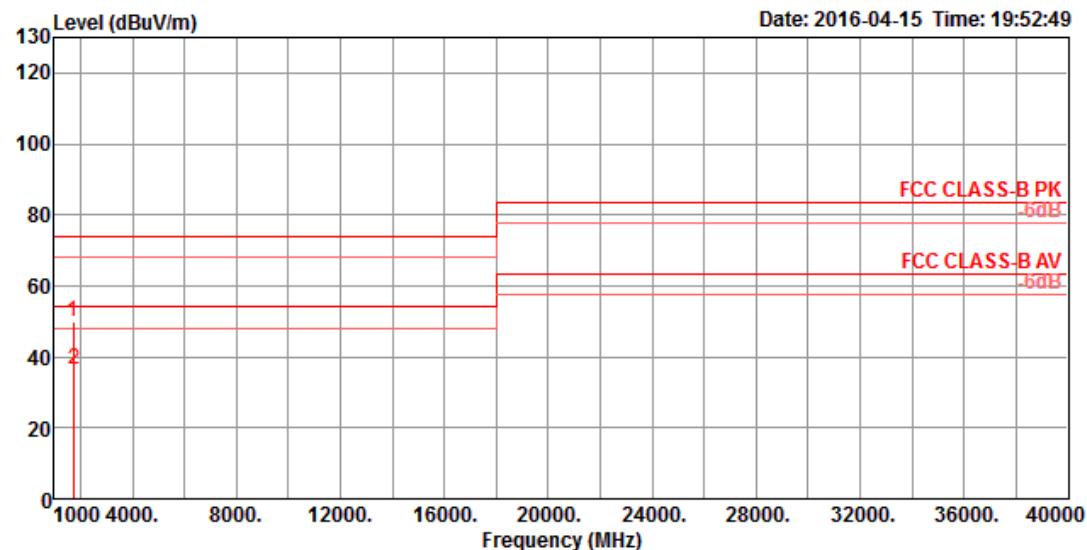

Freq	Level	Limit	Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
					Line	Limit	dB						
MHz	dBuV/m	dBuV/m											
1	1743.49	49.90	74.00	-24.10	51.70	4.26	25.82	31.88	153	246	Peak		VERTICAL
2	1755.51	36.56	54.00	-17.44	38.38	4.29	25.84	31.95	153	246	Average		VERTICAL