



**FCC 47 CFR PART 15 SUBPART C &
INDUSTRY CANADA RSS-210**

TEST REPORT

For

Dual-Band Wireless-N ADSL2+ Modem Router with Gigabit

Model: WAG320N

Trade Name: CISCO, Linksys

Issued to

**Cisco-Linksys LLC
121 Theory Drive Irvine CA92617 USA**

Issued by

**Compliance Certification Services Inc.
No. 11, Wu-Gong 6th Rd., Wugu Industrial Park,
Taipei Hsien 248, Taiwan (R.O.C.)
<http://www.ccsemc.com.tw>
service@ccsrf.com**



Testing Laboratory
1309

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5 DESCRIPTION OF TEST MODES	7
4. INSTRUMENT CALIBRATION.....	8
4.1 MEASURING INSTRUMENT CALIBRATION	8
4.2 MEASUREMENT EQUIPMENT USED.....	8
4.3 MEASUREMENT UNCERTAINTY	9
5. FACILITIES AND ACCREDITATIONS	10
5.1 FACILITIES	10
5.2 EQUIPMENT	10
5.3 LABORATORY ACCREDITATIONS AND LISTING.....	10
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	11
6. SETUP OF EQUIPMENT UNDER TEST	12
6.1 SETUP CONFIGURATION OF EUT.....	12
6.2 SUPPORT EQUIPMENT	12
7. APPLICABLE RULES FOR INDUSTRY CANADA RSS-210	13
8. FCC PART 15.247 REQUIREMENTS & RSS-210 REQUIREMENTS.....	19
8.1 99% BANDWIDTH.....	19
8.2 6DB BANDWIDTH	30
8.3 PEAK POWER	41
8.4 AVERAGE POWER	52
8.5 BAND EDGES MEASUREMENT	63
8.6 PEAK POWER SPECTRAL DENSITY	80
8.7 SPURIOUS EMISSIONS	95
8.8 RADIATED EMISSIONS	108
8.9 POWERLINE CONDUCTED EMISSIONS	125
APPENDIX I RADIO FREQUENCY EXPOSURE	128
APPENDIX II PHOTOGRAPHS OF TEST SETUP	131



1. TEST RESULT CERTIFICATION

Applicant: Cisco-Linksys LLC
121 Theory Drive Irvine CA92617 USA

Manufacturer: Cisco-Linksys LLC
121 Theory Drive Irvine CA92617 USA

Equipment Under Test: Dual-Band Wireless-N ADSL2+ Modem Router with Gigabit

Trade Name: CISCO, Linksys

Model: WAG320N

Date of Test: May 22 ~ July 27, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C & INDUSTRY CANADA RSS-210	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 and Industry Canada RSS-210.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Rex Lai
Section Manager
Compliance Certification Services Inc.

Reviewed by:

Gina Lo
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Dual-Band Wireless-N ADSL2+ Modem Router with Gigabit			
Trade Name	CISCO, Linksys			
Model Number	WAG320N			
Model Discrepancy	N/A			
Power Adapter	1. LEADER / MU15-C120125-A1 I/P: 100-240V, 50-60Hz, 0.5A O/P: 12V, 1.25 A 2. Bestec / NA0151WWA I/P: 100-240V, 50-60Hz O/P: 12V, 1.25 A			
Frequency Range	2412 ~ 2462 MHz			
Transmit Power	Mode	Frequency Range	Output Power (dBm)	Output Power (mW)
	802.11b	2412 - 2462	17.19	52.3600
	802.11g	2412 - 2462	16.64	46.1318
	802.11n Standard-20 MHz	2412 - 2462	17.89	61.5177
	802.11n Standard-40 MHz	2422 - 2452	16.41	43.7522
Modulation Technique	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mpbs) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mpbs) draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)			
Number of Channels	IEEE 802.11b/g mode: 11 Channels draft 802.11n Standard-20 MHz Channel mode: 11 Channels draft 802.11n Wide-40 MHz Channel mode: 7 Channels			
Antenna Specification	PIFA Antenna / Gain: 4.5 dBi			

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **Q87-WAG320N** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

The tests documented in this report were performed in accordance with IC RSS-210, IC RSS-Gen, IC RSS-102, IC RSS-212, and ANSI C63.4.

This submittal(s) (test report) is intended for IC Certification with Industry Canada RSS-210.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

The tests documented in this report were performed in accordance with IC RSS-210, IC RSS-Gen, IC RSS-102, and ANSI C63.4.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: WAG320N) comes with two types of power adapter (MU15-C120125-A1 & NA0151WWA) for sale. After the preliminary test, the EUT with power adapter (Model: MU15-C120125-A1) was found to emit the worst emissions and therefore had been tested under operating condition.

The EUT is a 2x3 configuration spatial MIMO (2Tx & 3Rx) without beam forming function. The 2x3 configuration is implemented with three outside TX & RX chains (Chain 0 and Chain 1).

Software used to control the EUT for staying in continuous transmitting and receiving mode was programmed.

After verification, all tests carried out are with the worst-case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode and receiving radiated spurious emission above 1GHz, which worst case was in CH Mid mode only.

IEEE 802.11b mode:

Channel Low(2412MHz), Channel Mid(2437MHz) and Channel High(2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low(2412MHz), Channel Mid(2437MHz) and Channel High(2462MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

draft 802.11n Wide-40 MHz Channel mode:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	02/23/2010

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	09/10/2009
Test Receiver	Rohde&Schwarz	ESCI	100064	11/30/2009
Switch Controller	TRC	Switch Controller	SC94050010	05/02/2010
4 Port Switch	TRC	4 Port Switch	SC94050020	05/02/2010
Loop Antenna	EMCO	6502	8905/2356	05/29/2010
Horn-Antenna	TRC	HA-0502	06	06/03/2010
Horn-Antenna	TRC	HA-0801	04	06/17/2010
Horn-Antenna	TRC	HA-1201A	01	08/10/2009
Horn-Antenna	TRC	HA-1301A	01	08/11/2009
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/28/2010
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC MRA: TW1039 IC: 2324G-1 / -2	10/17/2010 11/04/2010
Test S/W	LABVIEW (V 6.1)			

Powerline Conducted Emissions Test Site # A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TEST RECEIVER	R&S	ESHS20	840455/006	02/12/2010
LISN (EUT)	SCHWARZBECK	NSLK 8127	8127382	12/09/2009
LISN	SOLAR	8012-50-R-24-BNC	8305114	12/09/2009
BNC CABLE	MIYAZAKI	5D-FB	BNC A4	05/11/2010
THERMO-HYGRO METER	TECPYL	DTM-303	No.7	11/24/2009
Test S/W	EMI 32.exe			



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.7376
3M Semi Anechoic Chamber / 30MHz ~ 1GHz	+/-3.7046
3M Semi Anechoic Chamber / Above 1GHz	+/-3.0958

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

Remark: The radiated emissions test items was tested at Compliance Certification Services Inc. (Hsintien Lab.) The test equipments were listed in page 8 and the test data, please refer page 119-120.

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.



5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

WuGu Lab

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	Notebook PC	IBM	2672 (X31)	9985H9M	WLAN: ANO20030400LEG Bluetooth: ANO20020100MTN	LAN Cable: Unshielded, 1.0m USB to Com Port Cable: Unshielded, 1.5m	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2.	Test Kit	N/A	N/A	N/A	N/A	N/A	N/A

Hsintien Lab

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
3.	PS/2 Mouse	DELL	M071KC	443029525	DOC BSMI: R41108	Shielded, 1.8m	N/A
4.	PS/2 Keyboard	DELL	SK-8110	N/A	DOC BSMI: T3A002	Shielded, 1.8m	N/A
5.	Printer	EPSON	EPSON C60	DR3K039417	BSMI ID: 3902E006	Unshielded, 1.5m	Unshielded, 1.8m
6.	Monitor	SAMSUNG	710V	GS17H9NXA0 5853A	DOC BSMI: R33475	Shielded, 1.8m with two cores	Unshielded, 1.8m
7.	USB 2.0 HDD	A-Tec	HD-234	N/A	N/A	Shielded, 1.0m with a core	N/A
8.	Host PC	HP	xw4400	N/A	DOC BSMI: R33001	Unshielded, 1.0m	Unshielded, 1.8m
9.	Modem	ACEEX	1414	N/A	IFAXDM1414	Unshielded, 1.5m	Unshielded, 1.8m
10.	Server Notebook	HP	2210B	CNV7472KG5	DoC BSMI: R33001	Unshielded, 10m	Unshielded, 1.8m
11.	ADSL	ZYXEL	IES-1000	N/A	N/A	Unshielded, 10m	Unshielded, 1.8m
12.	LAN Cable	N/A	N/A	N/A	N/A	Unshielded, 1.5m X2	N/A

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7. APPLICABLE RULES FOR INDUSTRY CANADA RSS-210

RSS-210 §2 General Certification Requirements and Specifications

RSS-210 §2.1 Frequency Stability

When the carrier frequency stability is not specified, it need not be tested, provided that the carrier frequency is chosen such that the fundamental modulation products (meaning the nominal bandwidth) lie totally within the bands listed in Tables 2, 3, 4 and 5 and do not fall into any restricted band listed in Table 1. Due account shall be taken of carrier frequency drift as a result of aging, temperature, humidity, and supply voltage variations when using frequencies near the band edges.

RSS-210 §2.2 Restricted Bands and Unwanted Emission Frequencies

Restricted bands, identified in Table 1, are designated primarily for safety-of-life services (distress calling and certain aeronautical bands), certain satellite downlinks, radio astronomy, and some government uses. Except where otherwise indicated, the following restrictions apply:

(a) Fundamental components of modulation of LPDs shall not fall within the restricted bands of Table 1.

(b) Unwanted emissions falling into restricted bands of Table 1 shall meet Tables 2 and 3 limits. It should also be noted that unwanted emissions falling in non-restricted bands do not need to be suppressed to a level lower than the Table 2 and 3 limits.

(c) Unwanted emissions not falling within restricted frequency bands may also use the limits specified in the applicable annex.

RSS-210 §2.3 Licence-exempt Receivers

Category I licence-exempt receivers are required to have their spurious emissions comply with Section 7.2.3 of RSS-Gen.

RSS-210 §2.6 General Field Strength Limits

Table 2 and 3 list the permissible levels of unwanted emissions of transmitters and receivers. However, transmitters with field strengths that do not exceed the limits in these tables may also operate in these frequency bands, other than the restricted bands of Table 1 and the TV bands (i.e. unwanted emissions of transmitters and receivers are permitted to fall into Table 1 and TV frequencies but intentional emissions are prohibited). See the note of Table 2 for further details.

**RSS-210 §2.7 Tables****RSS-210 Table 1: Restricted Frequency Bands** (Note)

MHz	MHz	MHz	MHz	GHz
0.090-0.110	8.37625-8.38675	--	1718.8-1722.2	9.0-9.2
--	8.41425-8.41475	156.52475-156.52525	2200-2300	9.3-9.5
2.1735-2.1905	12.29-12.293	156.7-156.9	2310-2390	10.6-12.7
3.020-3.026	12.51975-12.52025	--	--	13.25-13.4
4.125-4.128	12.57675-12.57725	--	2655-2900	14.47-14.5
4.17725-4.17775	13.36-13.41	240-285	3260-3267	15.35-16.2
4.20725-4.20775	16.42-16.423	322-335.4	3332-3339	17.7-21.4
5.677-5.683	16.69475-16.69525	399.9-410	3345.8-3358	22.01-23.12
6.215-6.218	16.80425-16.80475	608-614	3500-4400	23.6-24.0
6.26775-6.26825	25.5-25.67	960-1427	4500-5150	31.2-31.8
6.31175-6.31225	37.5-38.25	1435-1626.5	5350-5460	36.43-36.5
8.291-8.294	73-74.6; 74.8-75.2	1645.5-1646.5	7250-7750	Above 38.6
8.362-8.366	108-138	1660-1710	8025-8500	

Note: Certain frequency bands listed in Table 2 and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard as well as RSS-310.

RSS-210 Table 2: General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz (Note)

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Note: Transmitting devices are not permitted in Table 1 bands or in TV bands (54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz, and 614-806 MHz). Prohibition of operation in TV bands does not apply to momentary devices, or to medical telemetry devices in the band 174-216 MHz, and to perimeter protection systems in the bands 54-72 and 76-88 MHz. The perimeter protection devices are to meet Table 3 field strengths limits.

**RSS-210 Table 3: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)**

Frequency (fundamental or spurious)	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/377F (F in Hz)	300
490-1.705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average detector.

RSS-210 §Annex 8: Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands

This section applies to systems that employ frequency hopping (FH) and digital modulation technology in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. Systems in these bands may employ frequency hopping, digital modulation and or a combination (hybrid) of both techniques.

A frequency hopping system that synchronizes with another or several other systems (to avoid frequency collision among them) via off-air sensing or via connecting cables is not hopping randomly and therefore is not in compliance with RSS-210.

RSS-210 §A8.2 Digital Modulation Systems

These include systems employing digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to all three bands.

RSS-210 §A8.4 Transmitter Output Power and e.i.r.p. Requirements

(4) For systems employing digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands, the maximum peak conducted power shall not exceed 1 W. Except as provided in Section A8.4(5), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power (see RSS-Gen)

(5) Point-to-point systems in the bands 2400-2483.5 MHz and 5725-5850 MHz are permitted to have an e.i.r.p. higher than 4 W, provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers. Point-to-multipoint systems, omni-directional applications and multiple co-located transmitters transmitting the same information are prohibited from exceeding 4 W e.i.r.p. However, remote stations of point-to-multipoint systems shall be allowed to operate at greater than 4 W e.i.r.p, under the same conditions as for point-to- point systems.

Note: “Fixed, point-to-point operation”, excludes point-to-multipoint systems, omnidirectional applications and multiple co-located transmitters transmitting the same information.



RSS-210 §A8.5 Out-of-band Emissions

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required.

RSS-Gen §2 General Information

Unless otherwise indicated, radiocommunications equipment is subject to licensing pursuant to subsection 4(1) of the *Radiocommunication Act*.

RSS-Gen §2.1.2 Category II Equipment

Category II equipment comprises radio devices where a standard has been prescribed but for which a TAC is not required, that is, equipment certification by Industry Canada or a Certification Body (CB) is not required (certification exempt), pursuant to subsection 4(3) of the *Radiocommunication Act*. The manufacturer or importer shall nevertheless ensure that the standards are complied with. A test report shall be available on request and the device shall be properly labelled.

RSS-Gen §2.2 Receivers

Radiocommunication receivers are defined as Category I equipment or Category II equipment by the characteristics outlined below.

RSS-Gen §2.2.1 Category I Equipment Receivers

A receiver is classified as Category I equipment if it meets one of the following conditions:

- (a) is a stand-alone receiver that is tunable to any frequency in the band 30-960 MHz;
- (b) is a receiver that is associated with Category I transmitters; or
- (c) is a scanner receiver.

Except for scanner receivers, which have their own RSSs, Category I receivers shall comply with the limits for receiver spurious emissions set out in Section 6 of this RSS-Gen, and shall be certified under the RSS applicable to the transmitter type with which the receiver is associated or designed to operate (NOT under RSS-Gen).

RSS-Gen §2.2.2 Category II Equipment Receivers

A receiver is classified as Category II equipment if it is not meeting the conditions of Section 2.2.1.

RSS-Gen §2.2.3 Licence-exempt Receivers

Paging receivers, “receive-only” earth stations operating with satellites approved by Industry Canada, and stand-alone receivers which are exempted from licensing, can be classified as either Category I or Category II. These receivers shall comply with the requirements of RSS-210 or RSS-310, respectively.

RSS-Gen §2.3 Licence-exempt Low-power Radiocommunication Devices (LPDs)

Licence-exempt low-power radiocommunication devices are devices which have intentional and unwanted emissions of very low signal levels such that they can co-exist with licensed radio services. LPDs are required to operate on a “**no-interference no-protection**” basis (i.e. they may not cause radio interference and cannot claim protection from interference). The requirements for LPDs are generally described in Section 7.

RSS-Gen §5.5 Exposure of Humans to RF Fields

Before equipment certification is granted, the applicable requirements of RSS-102 shall be met.

RSS-Gen §6 Receiver Spurious Emission Standard

The following receiver spurious emission limits shall be complied with:

(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1.

RSS-Gen Table 1 - Spurious Emission Limits for Receivers

Frequency (MHz)	Field Strength microvolts/m at 3 metres
30-88	100
88-216	150
216-960	200
Above 960	500

(b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

RSS-Gen §7.1.4 Transmitter Antenna

A transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.

**RSS-Gen §7.2.2 Transmitter and Receiver AC Power Lines Conducted Emission Limits**

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radiocommunication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 2. The tighter limit applies at the frequency range boundaries.

RSS-Gen Table 2 – AC Power Lines Conducted Emission Limits


Frequency Range (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

**Decreases with the logarithm of the frequency*

8. FCC PART 15.247 REQUIREMENTS & RSS-210 REQUIREMENTS

8.199% BANDWIDTH

Test Configuration

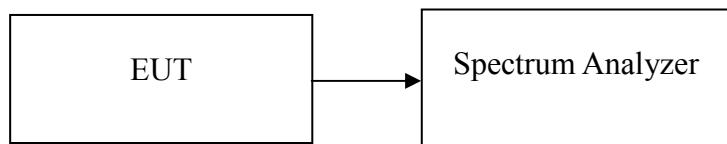

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	13.1241
Mid	2437	13.1612
High	2462	13.0990

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.5033
Mid	2437	16.5444
High	2462	16.5600

Test mode: draft 802.11n Standard-20 MHz Channel mode / Chain 0

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.6356
Mid	2437	17.6158
High	2462	17.6294

Test mode: draft 802.11n Standard-20 MHz Channel mode / Chain 1

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.6862
Mid	2437	17.7161
High	2462	17.6798

Test mode: draft 802.11n Standard-40 MHz Channel mode / Chain 0

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2422	36.0656
Mid	2437	36.0120
High	2452	35.9810

Test mode: draft 802.11n Standard-40 MHz Channel mode / Chain 1

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2422	36.1349
Mid	2437	36.1573
High	2452	36.1316

Test Plot**IEEE 802.11b mode****99% Bandwidth (CH Low)**


Agilent 15:15:07 Jun 23, 2009

99% BW, b Mode Low Ch.

Ref 20 dBm

Atten 10 dB

R T

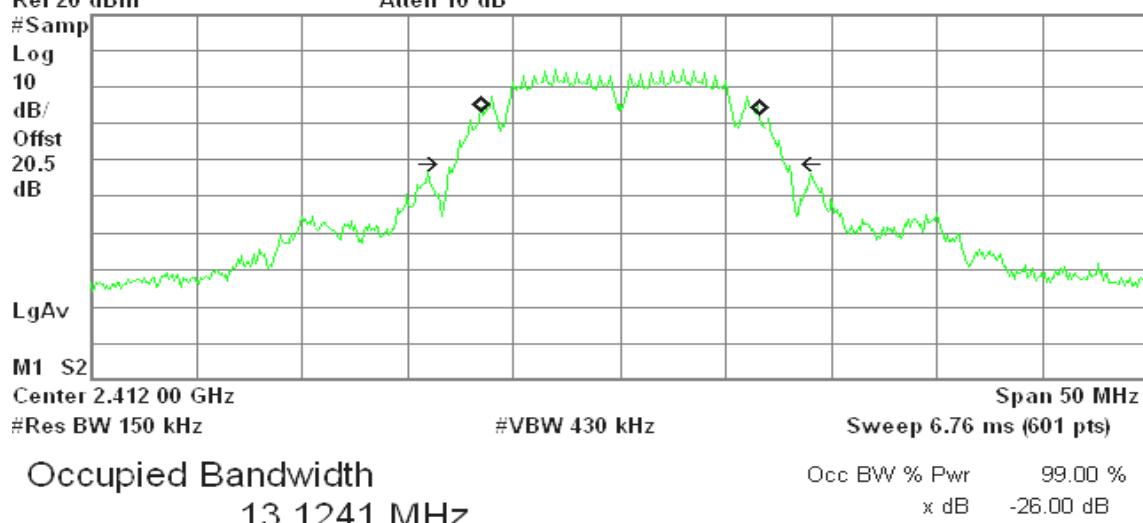Transmit Freq Error
x dB Bandwidth27.283 kHz
15.504 MHz***99% Bandwidth (CH Mid)**


Agilent 15:36:05 Jun 23, 2009

99% BW, b Mode Mid Ch.


Ref 20 dBm

Atten 10 dB

R T

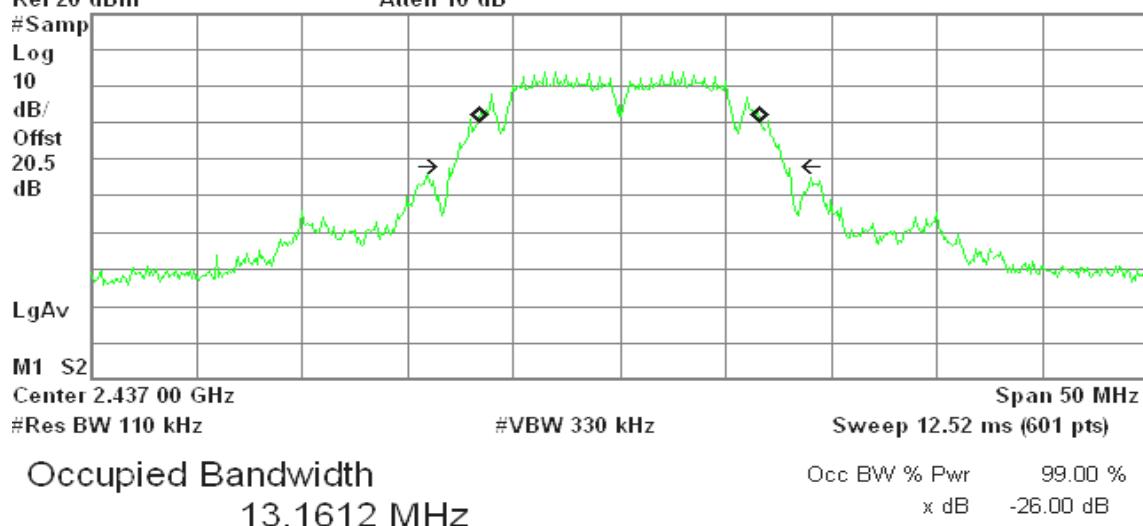Transmit Freq Error
x dB Bandwidth214.695 Hz
15.546 MHz*


99% Bandwidth (CH High)

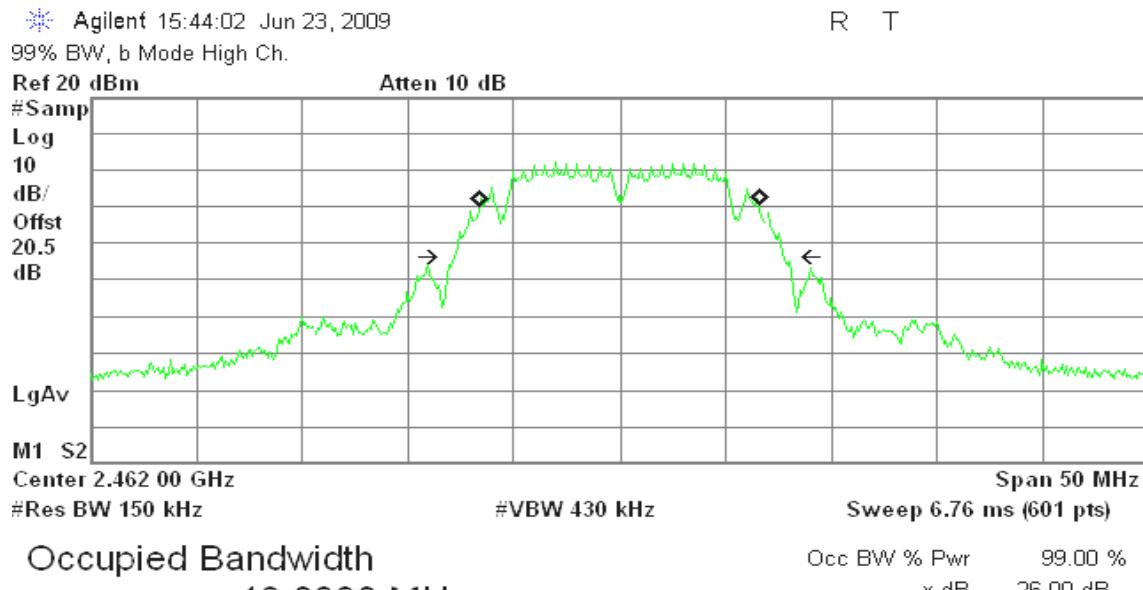

Transmit Freq Error -3.664 kHz
x dB Bandwidth 15.504 MHz*


IEEE 802.11g mode

99% Bandwidth (CH Low)

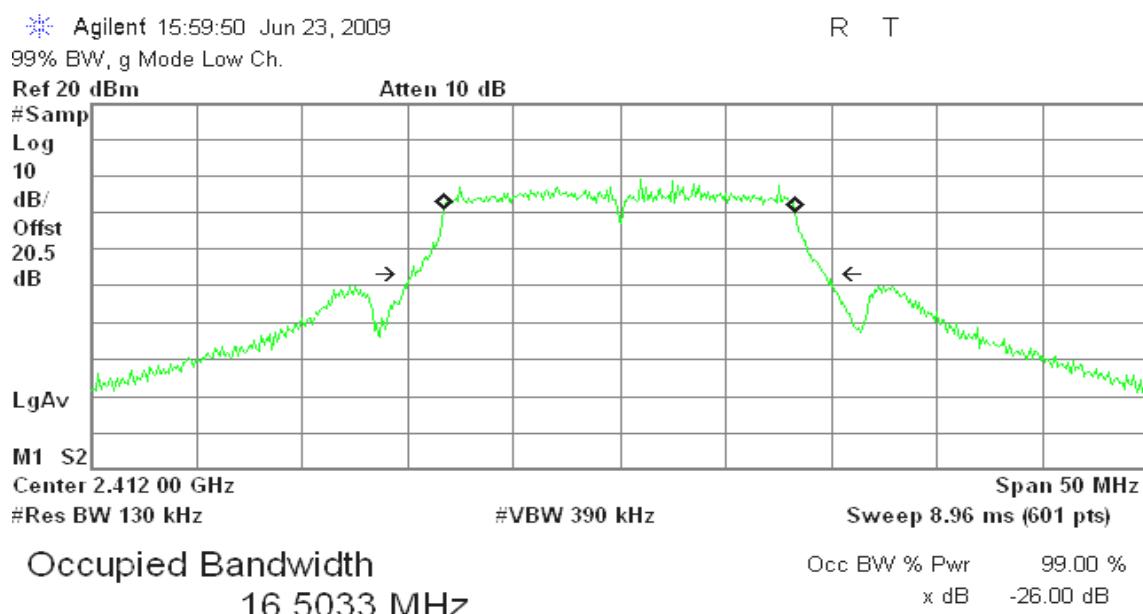


Transmit Freq Error 14.725 kHz
x dB Bandwidth 19.422 MHz*

99% Bandwidth (CH Mid)

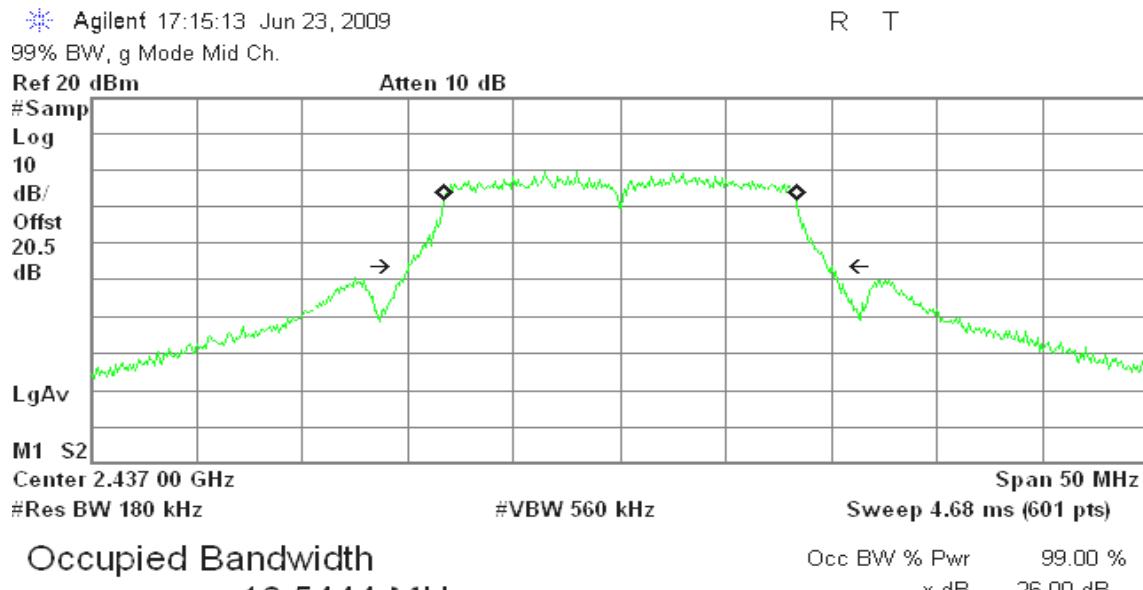


Transmit Freq Error 31.760 kHz
x dB Bandwidth 20.053 MHz*


99% Bandwidth (CH High)

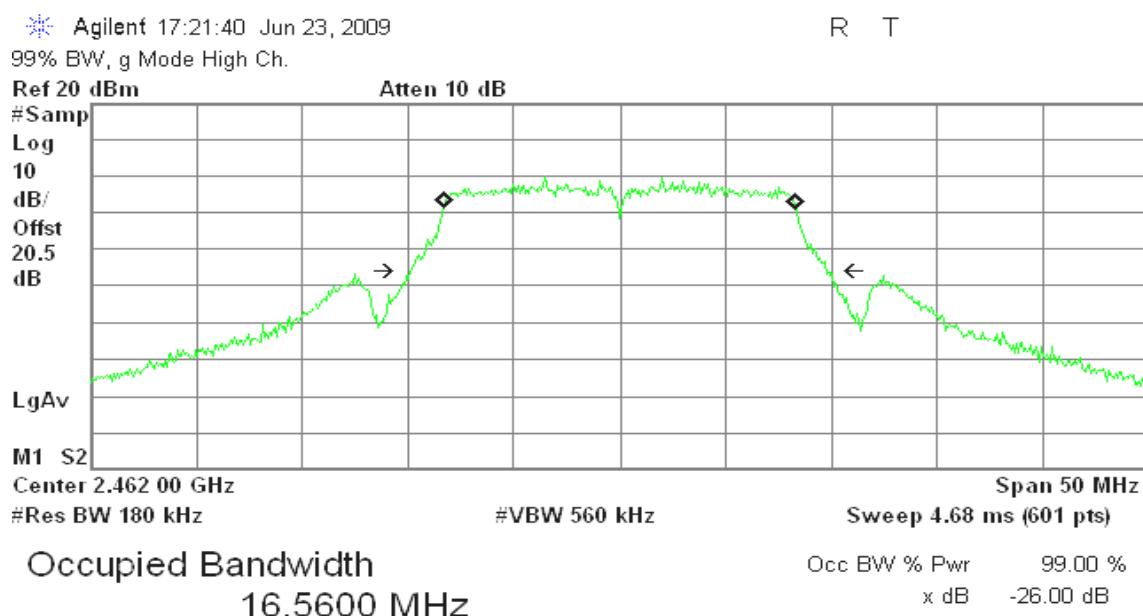


Transmit Freq Error 7.907 kHz
x dB Bandwidth 19.540 MHz*

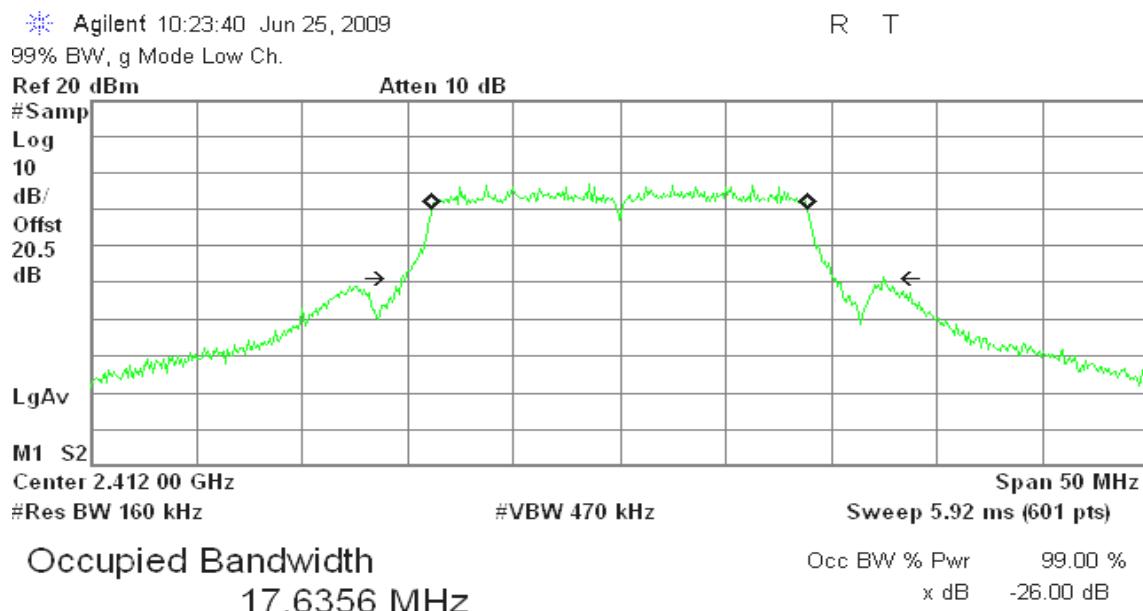draft 802.11n Standard-20 MHz Channel mode / Chain 0**99% Bandwidth (CH Low)**


Transmit Freq Error 23.793 kHz
x dB Bandwidth 22.815 MHz*

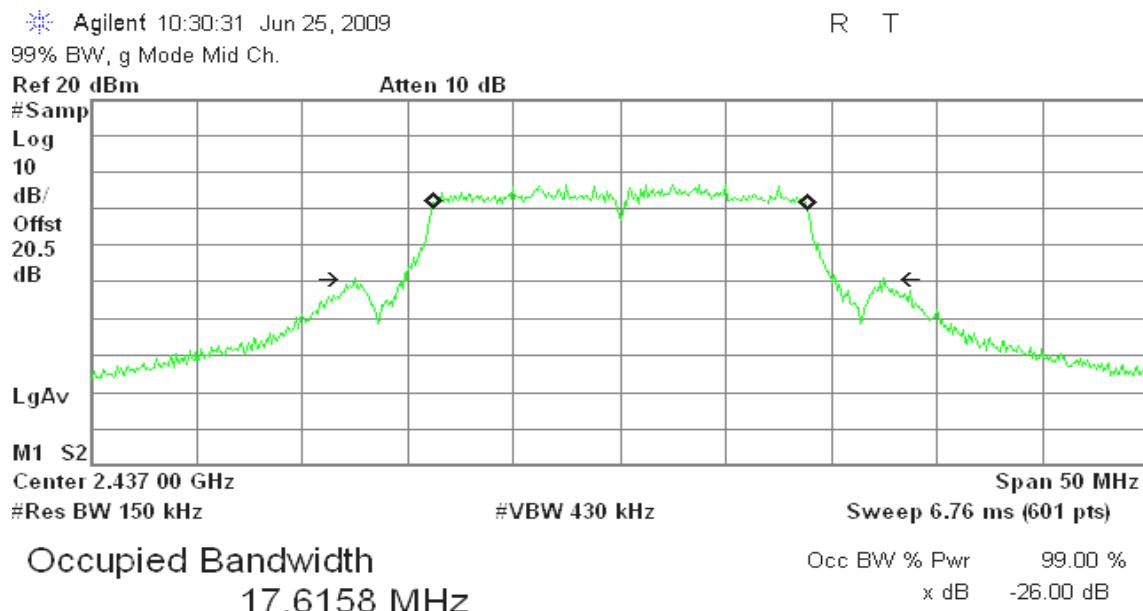99% Bandwidth (CH Mid)

Transmit Freq Error 17.033 kHz
x dB Bandwidth 25.027 MHz*

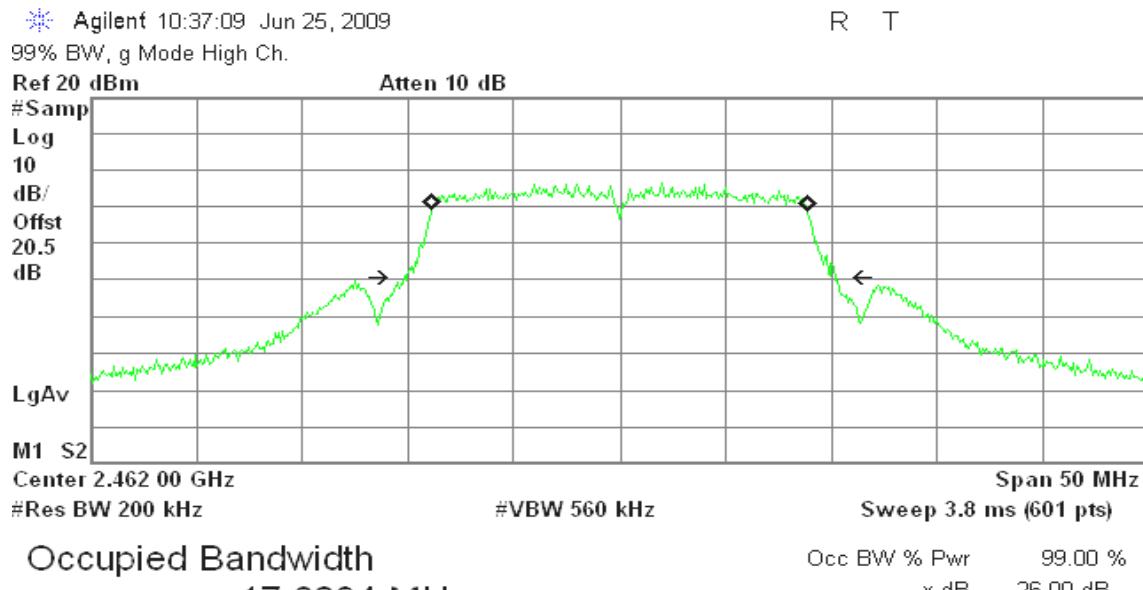
99% Bandwidth (CH High)

Transmit Freq Error 15.864 kHz
x dB Bandwidth 20.430 MHz*

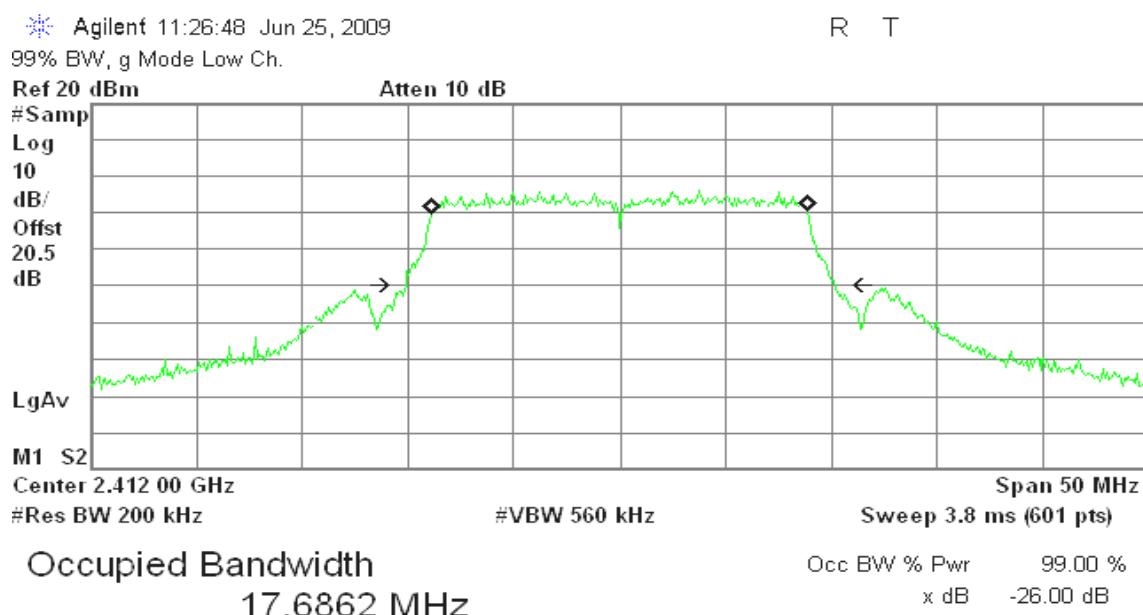draft 802.11n Standard-20 MHz Channel mode / Chain 1**99% Bandwidth (CH Low)**


Transmit Freq Error 9.861 kHz
x dB Bandwidth 20.289 MHz*

99% Bandwidth (CH Mid)

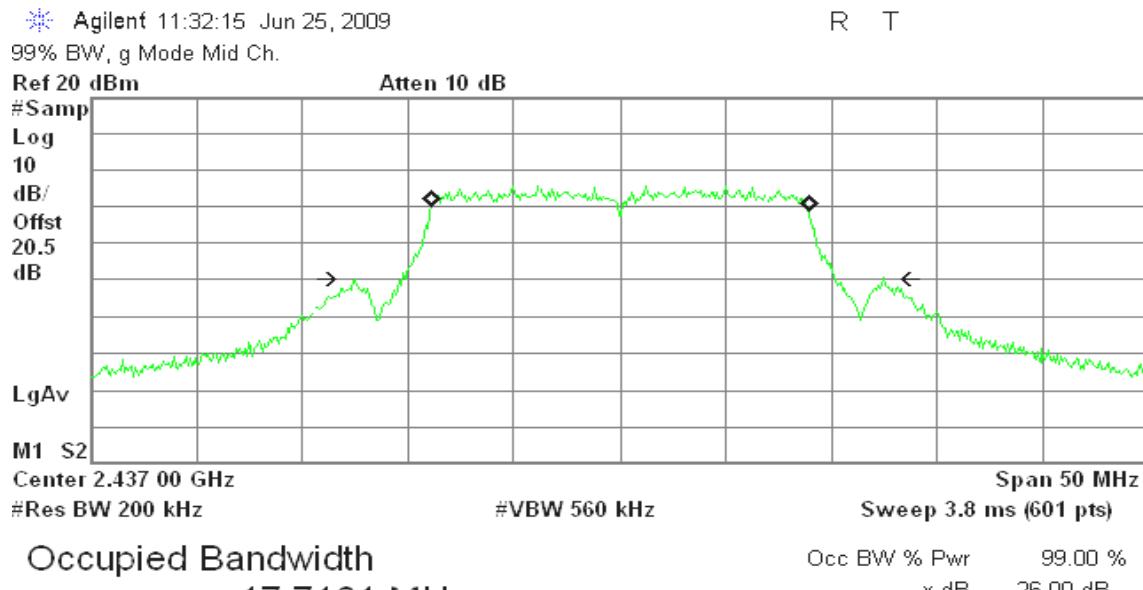


Transmit Freq Error 17.484 kHz
x dB Bandwidth 25.074 MHz*


99% Bandwidth (CH High)

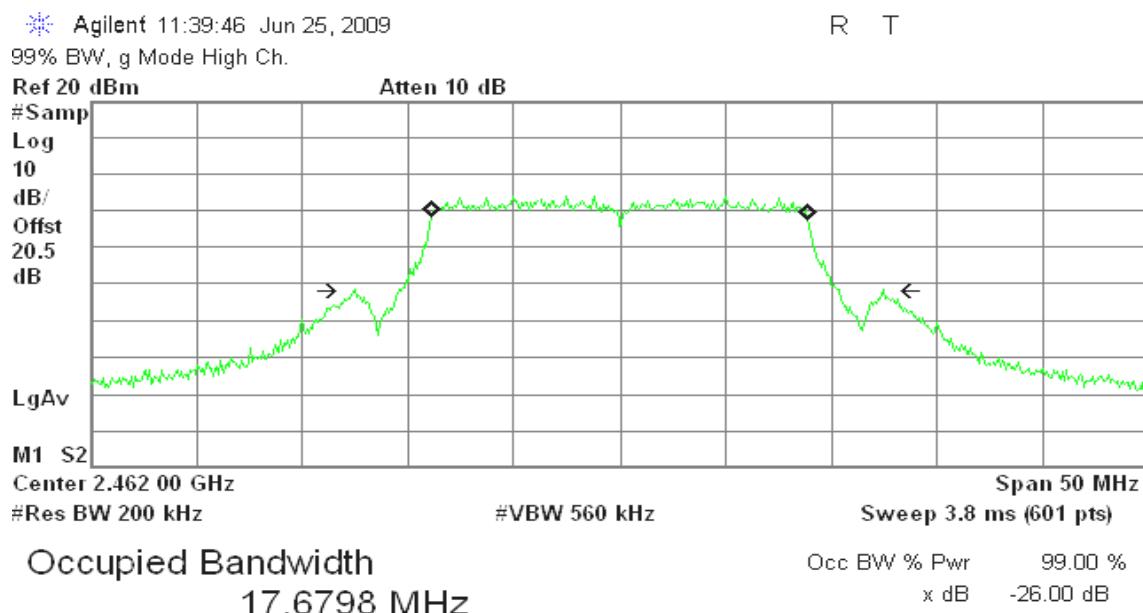


Transmit Freq Error 2.851 kHz
x dB Bandwidth 25.073 MHz*

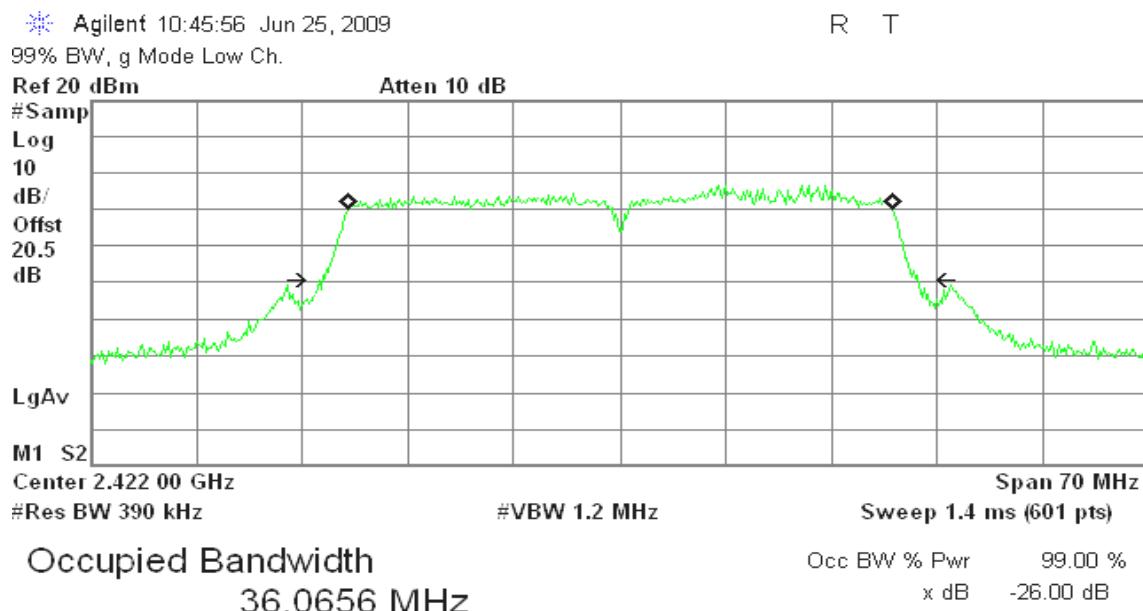draft 802.11n Standard-40 MHz Channel mode / Chain 0**99% Bandwidth (CH Low)**


Transmit Freq Error 51.348 kHz
x dB Bandwidth 39.437 MHz*

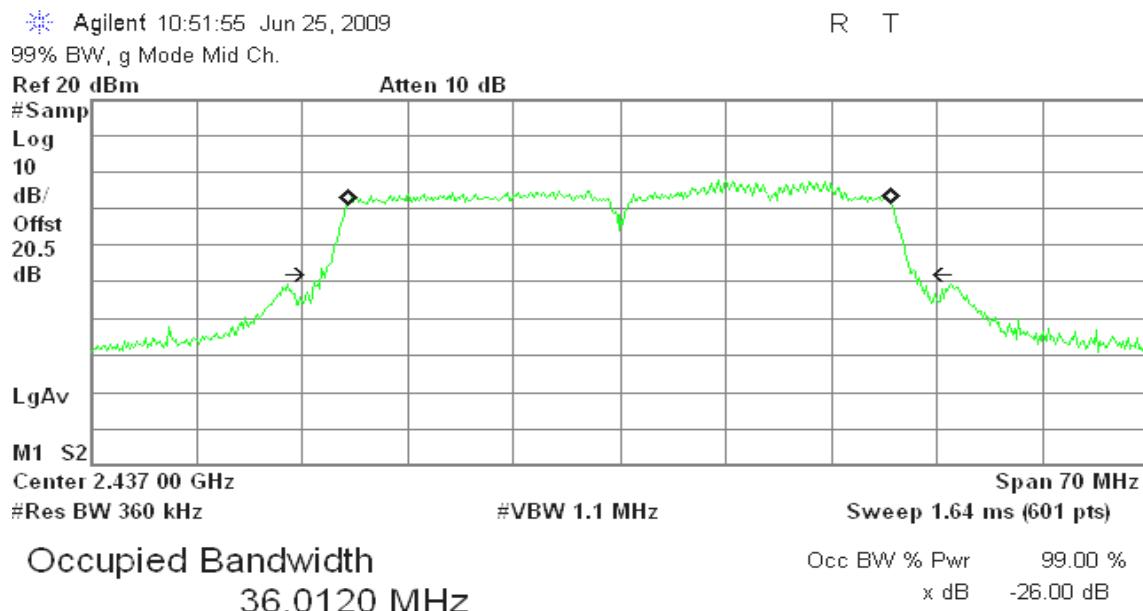99% Bandwidth (CH Mid)

Transmit Freq Error 14.514 kHz
x dB Bandwidth 39.409 MHz*

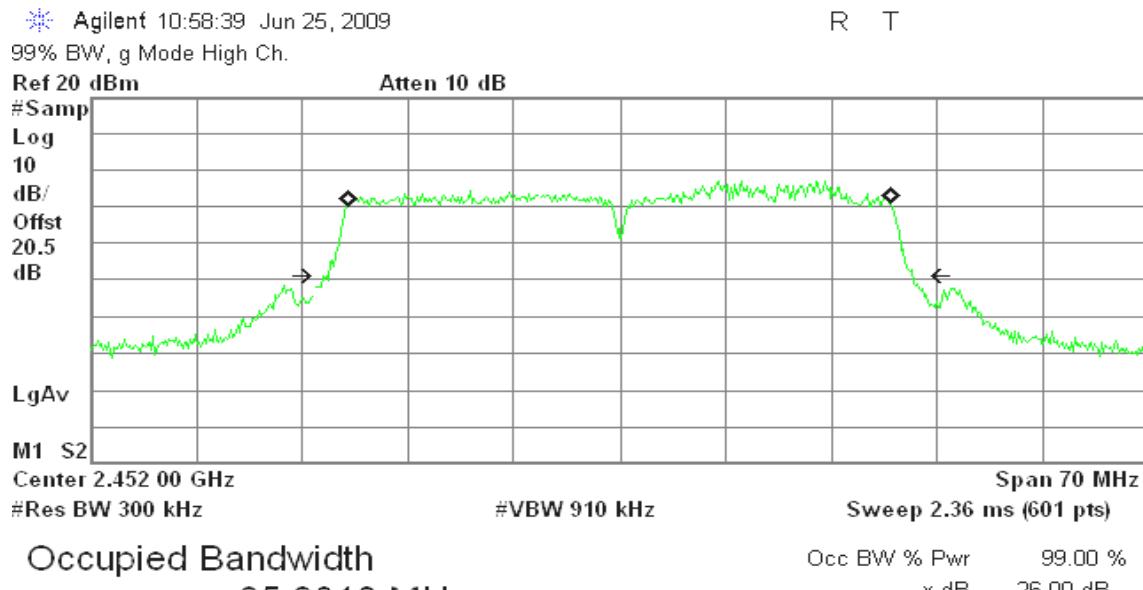
99% Bandwidth (CH High)

Transmit Freq Error 5.703 kHz
x dB Bandwidth 38.666 MHz*

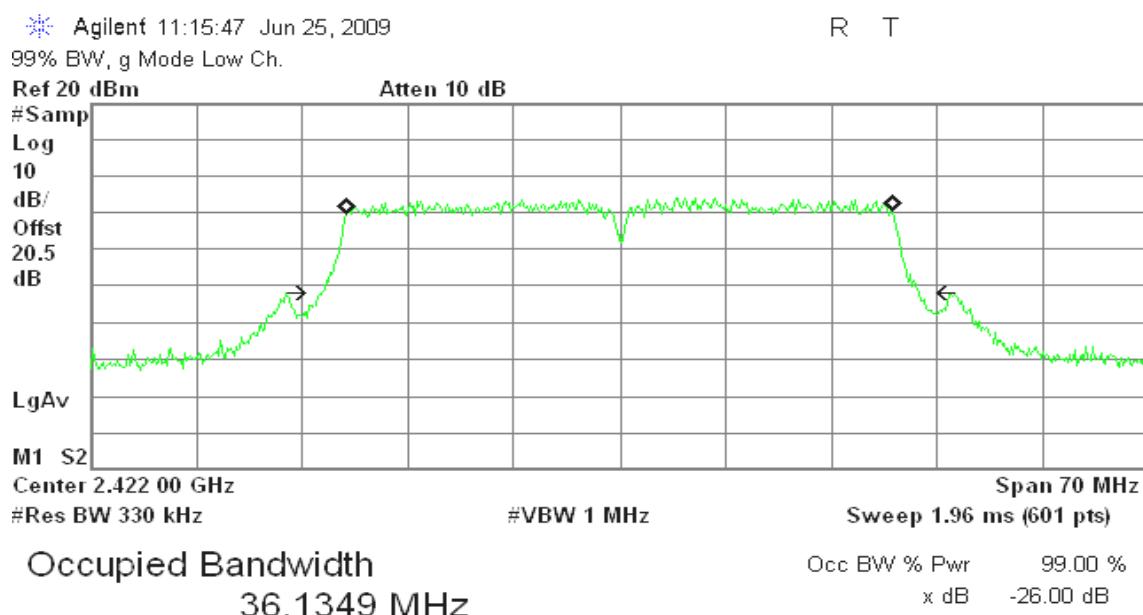draft 802.11n Standard-40 MHz Channel mode / Chain1**99% Bandwidth (CH Low)**


Transmit Freq Error 28.617 kHz
x dB Bandwidth 39.465 MHz*

99% Bandwidth (CH Mid)

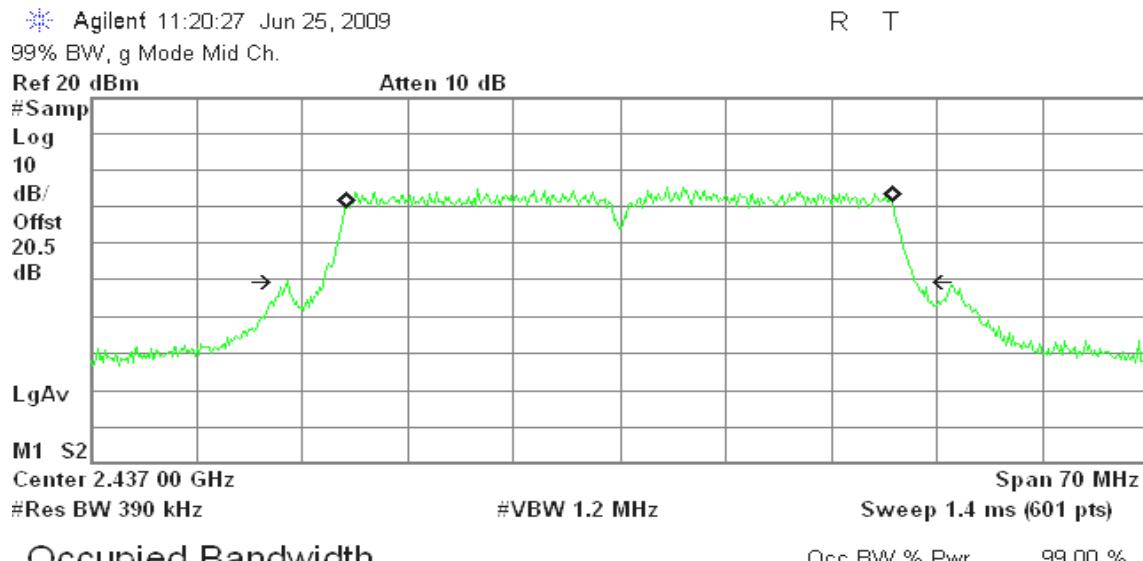

Transmit Freq Error 7.616 kHz
x dB Bandwidth 41.541 MHz*

99% Bandwidth (CH High)

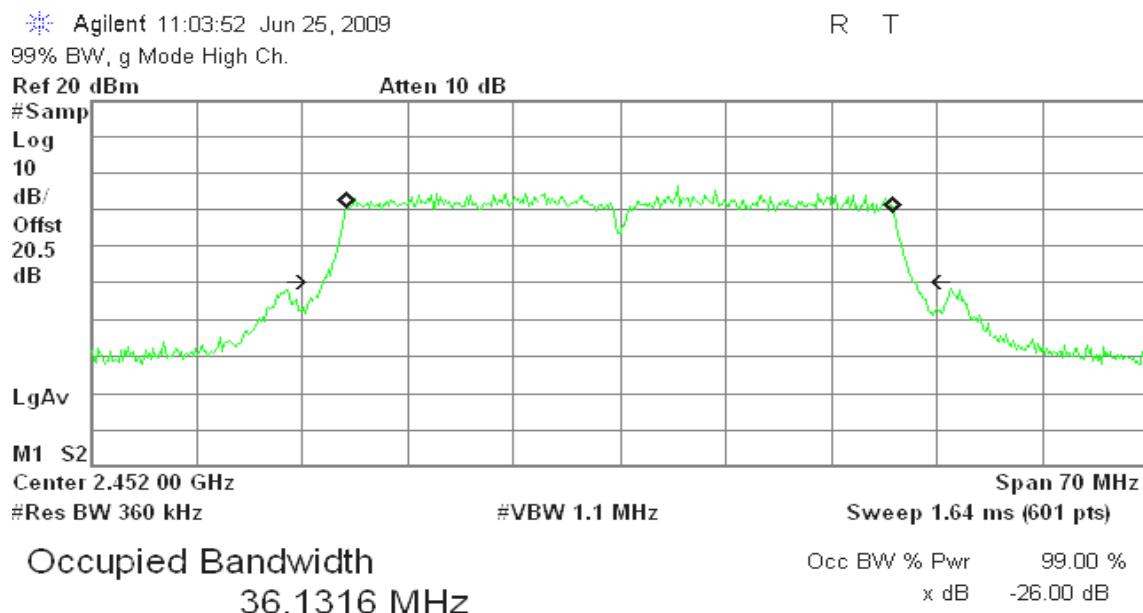


Transmit Freq Error -1.110 kHz
x dB Bandwidth 39.065 MHz*

8.2 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2) & RSS-210 §A8.2(a), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration

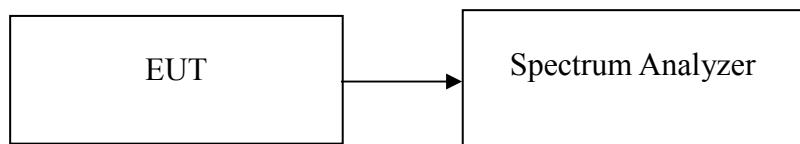

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	10170	>500	PASS
Mid	2437	10330		PASS
High	2462	10170		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	16500	>500	PASS
Mid	2437	16420		PASS
High	2462	16500		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode / Chain 0

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	17830	>500	PASS
Mid	2437	17670		PASS
High	2462	17670		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode / Chain 1

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	17750	>500	PASS
Mid	2437	17670		PASS
High	2462	17750		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode / Chain 0

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2422	36170	>500	PASS
Mid	2437	32200		PASS
High	2452	36280		PASS


Test mode: draft 802.11n Wide-40 MHz Channel mode / Chain 1

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2422	36170	>500	PASS
Mid	2437	36400		PASS
High	2452	36170		PASS


Test Plot

IEEE 802.11b mode


6dB Bandwidth (CH Low)

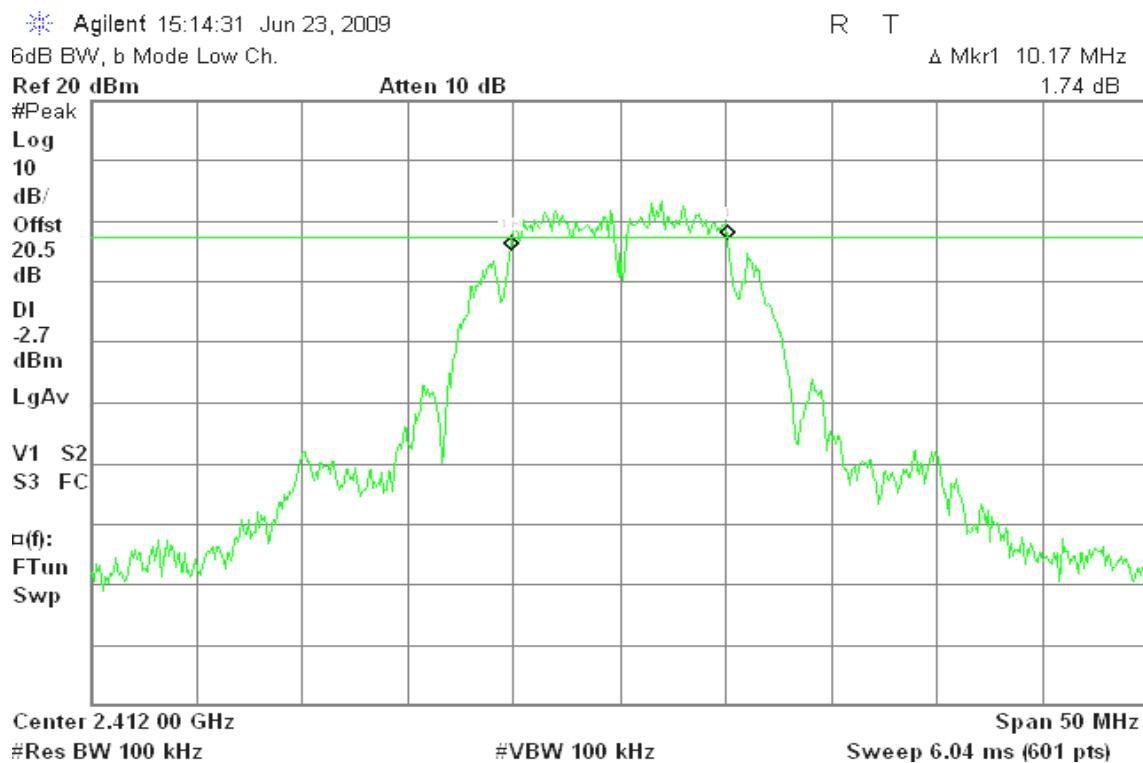

6dB Bandwidth (CH Mid)

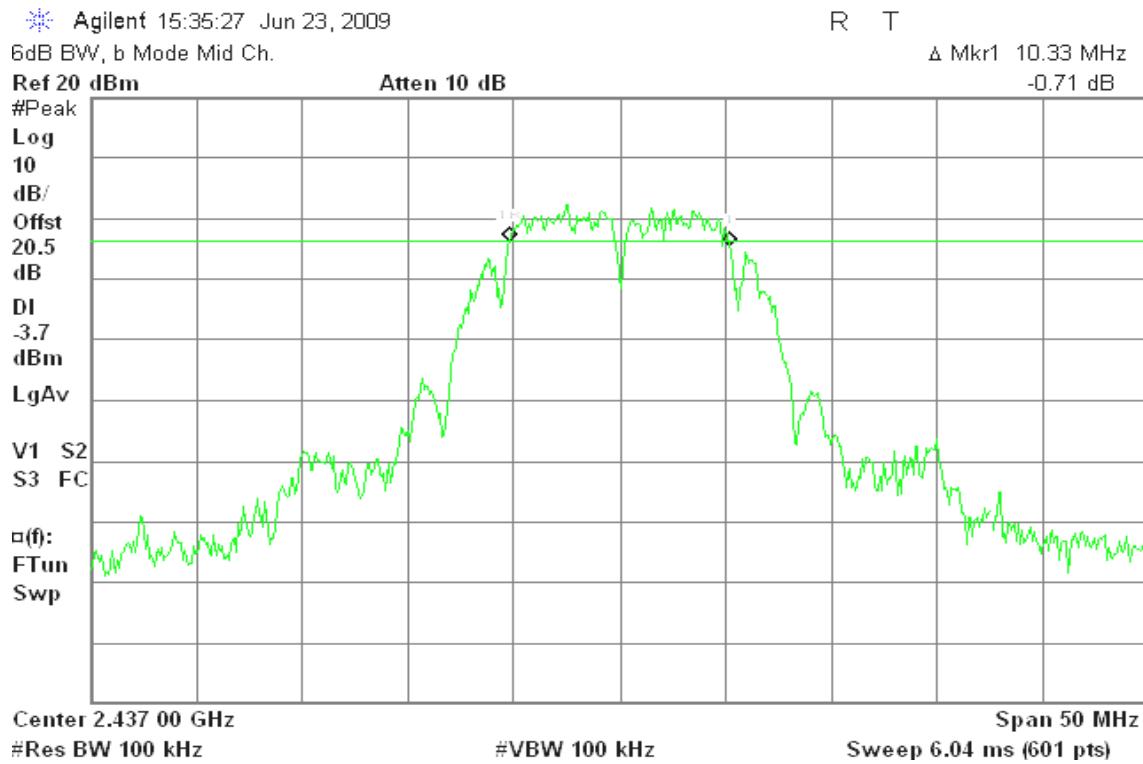


6dB Bandwidth (CH High)

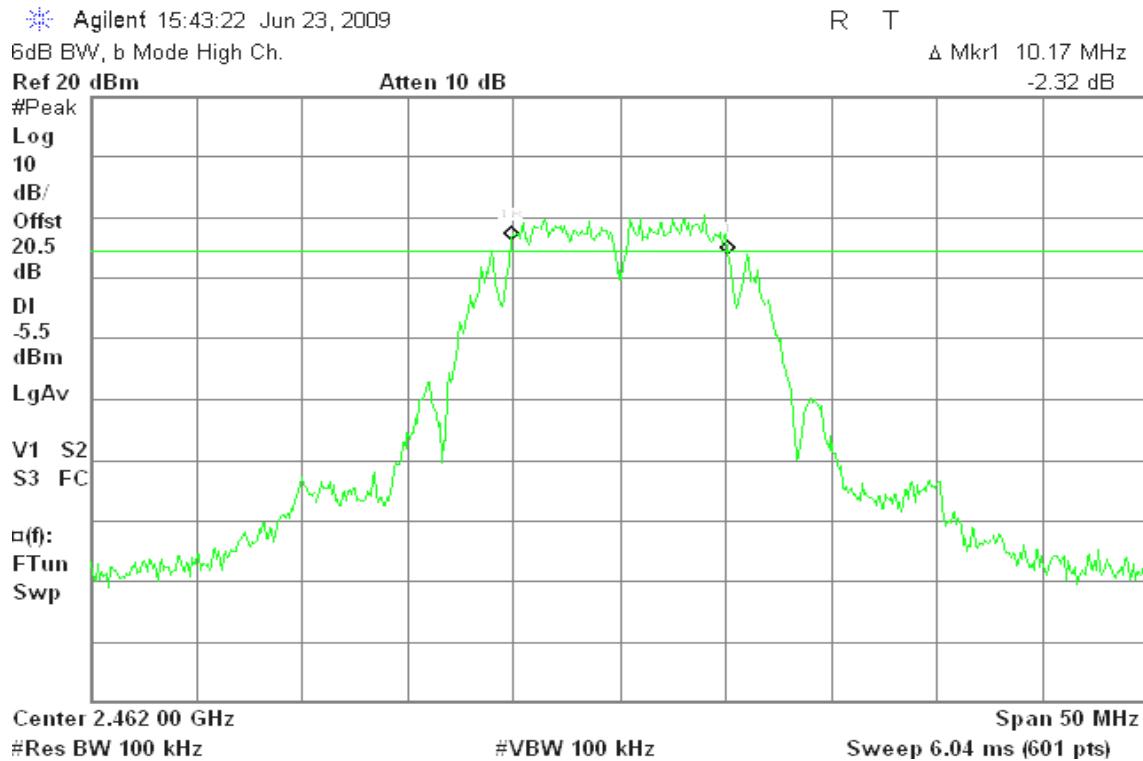


IEEE 802.11g mode


6dB Bandwidth (CH Low)


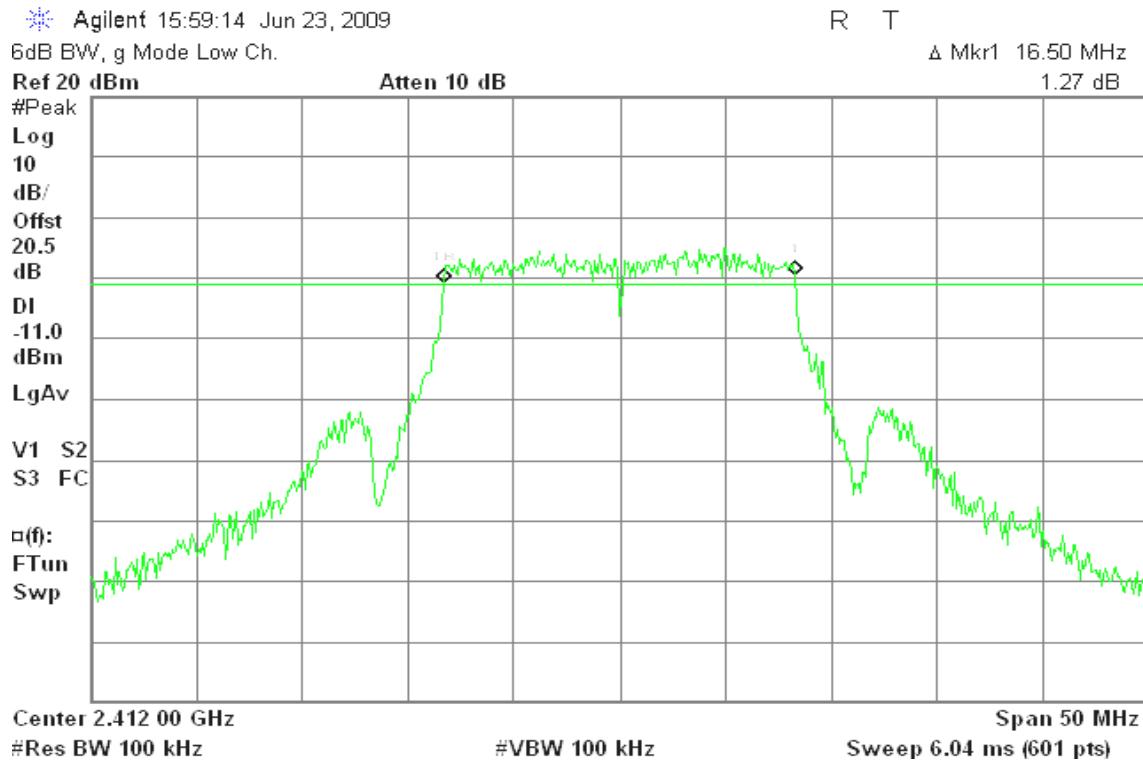


6dB Bandwidth (CH Mid)

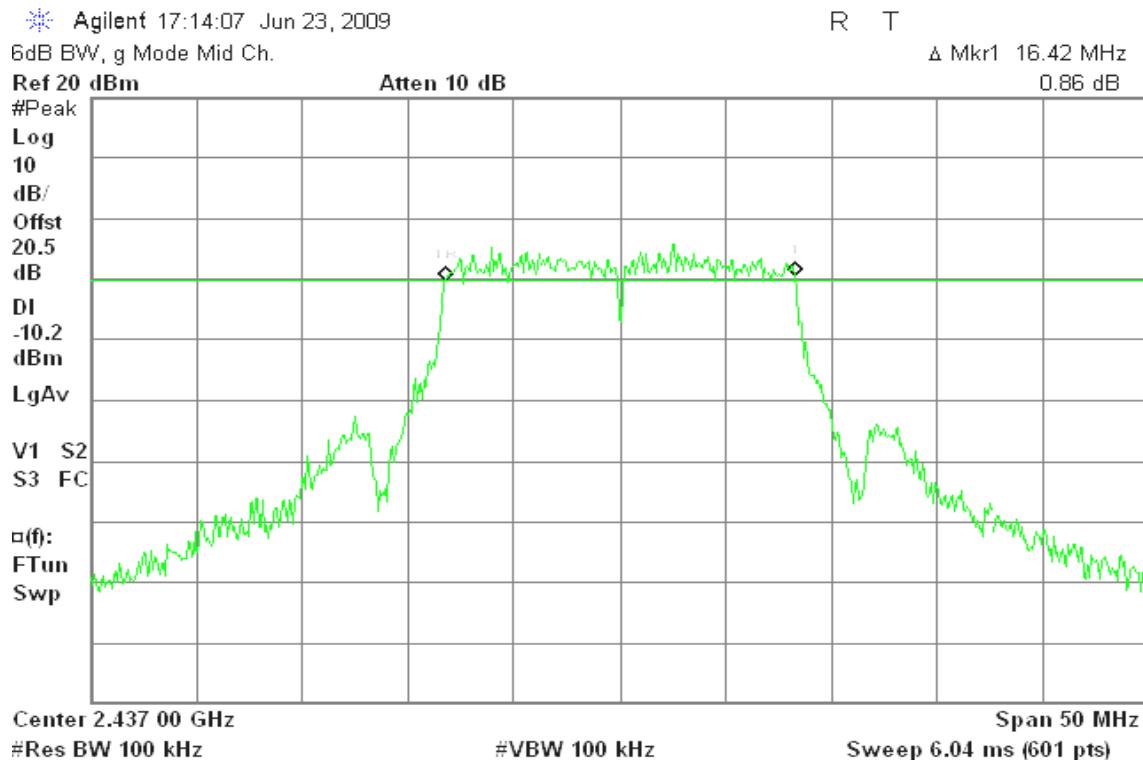


6dB Bandwidth (CH High)

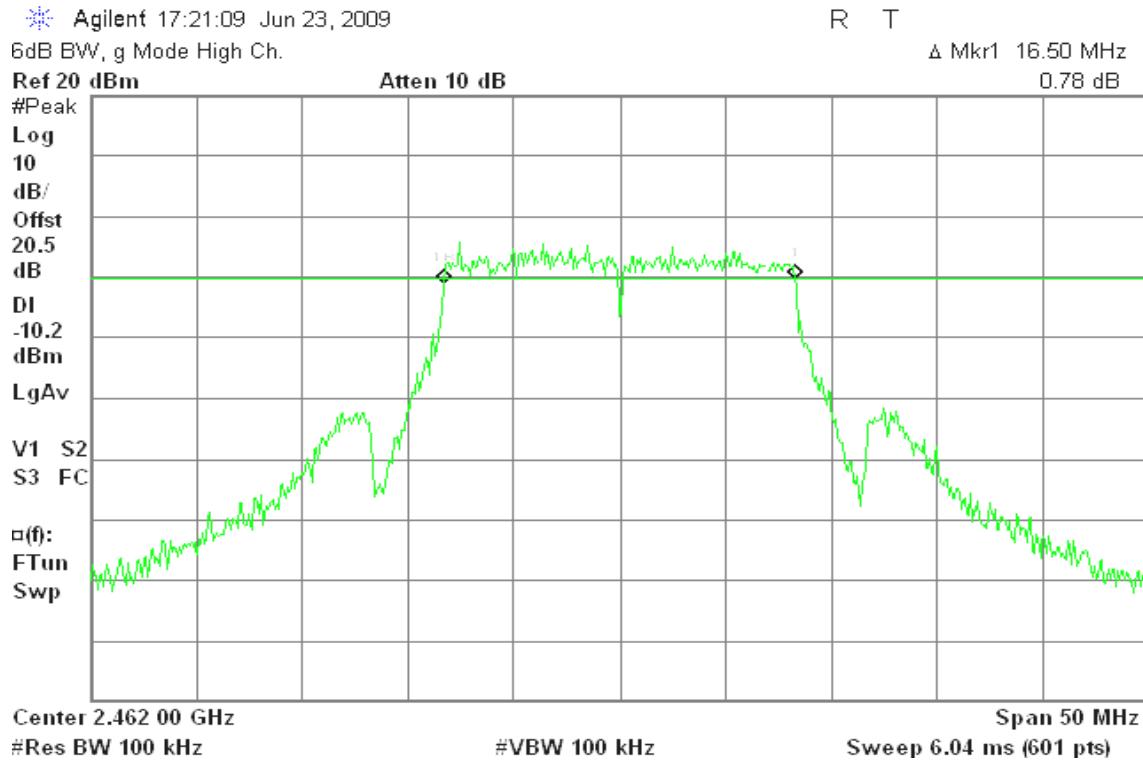

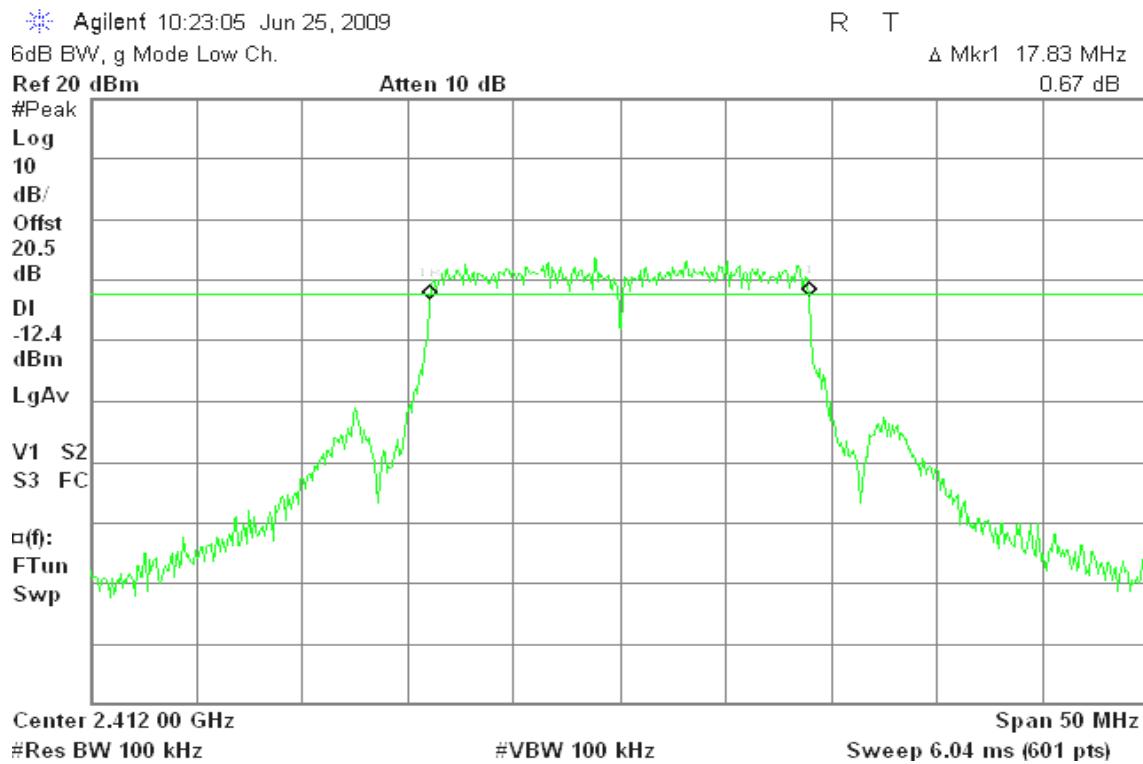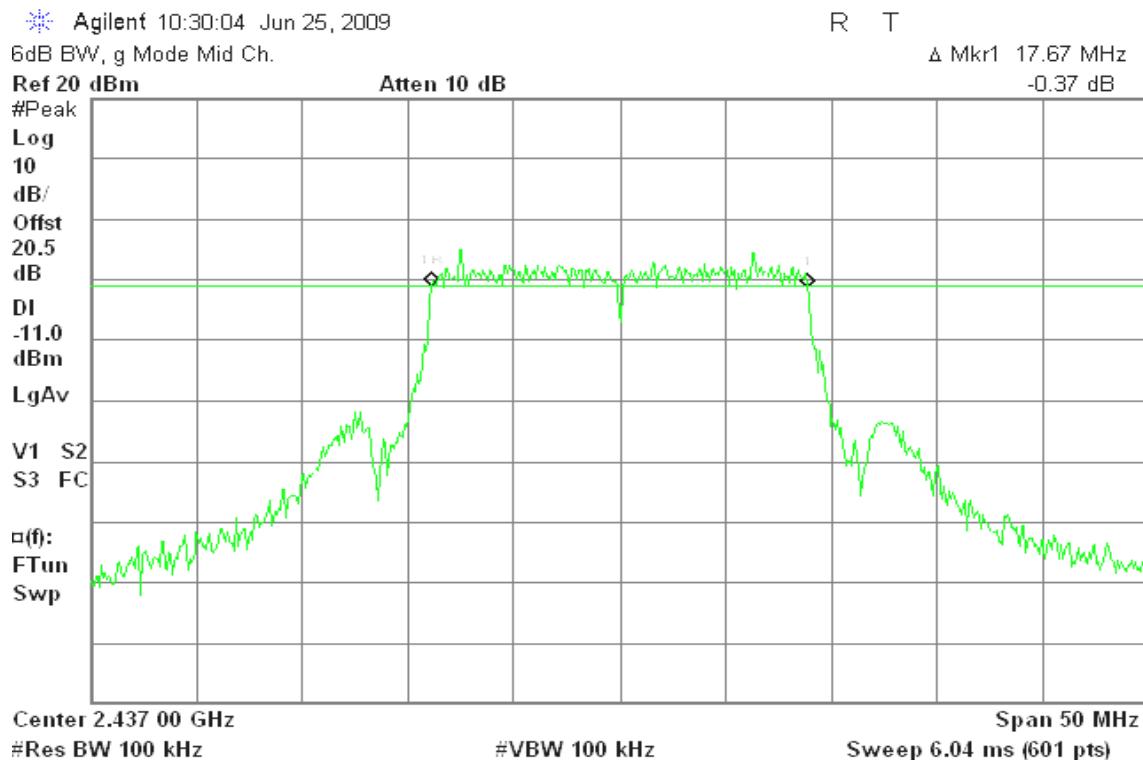
draft 802.11n Standard-20 MHz Channel mode / Chain 0**6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**

6dB Bandwidth (CH High)

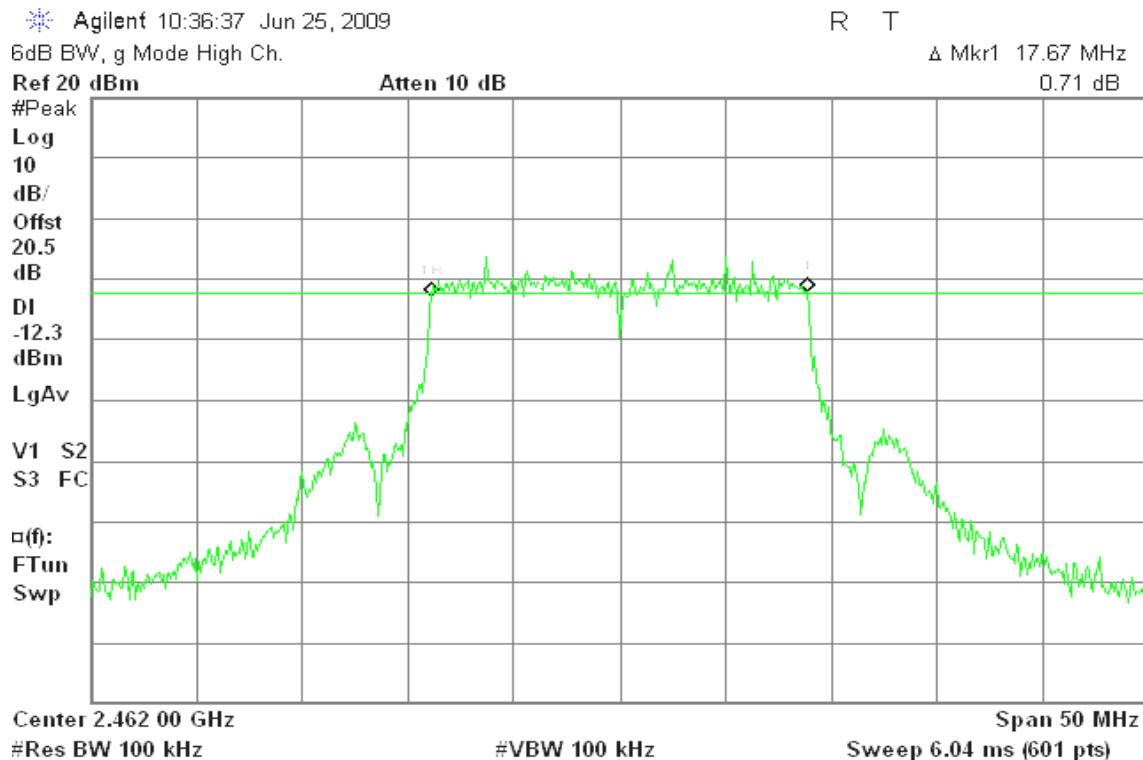


draft 802.11n Standard-20 MHz Channel mode / Chain 1


6dB Bandwidth (CH Low)


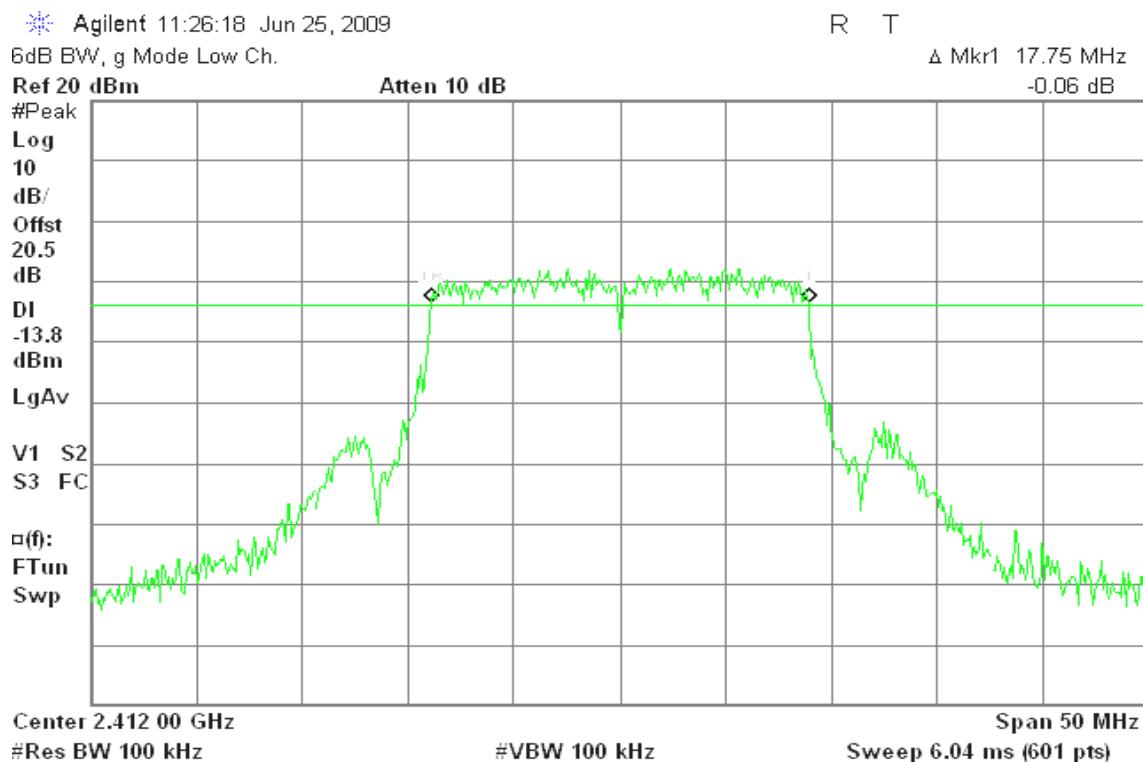


6dB Bandwidth (CH Mid)

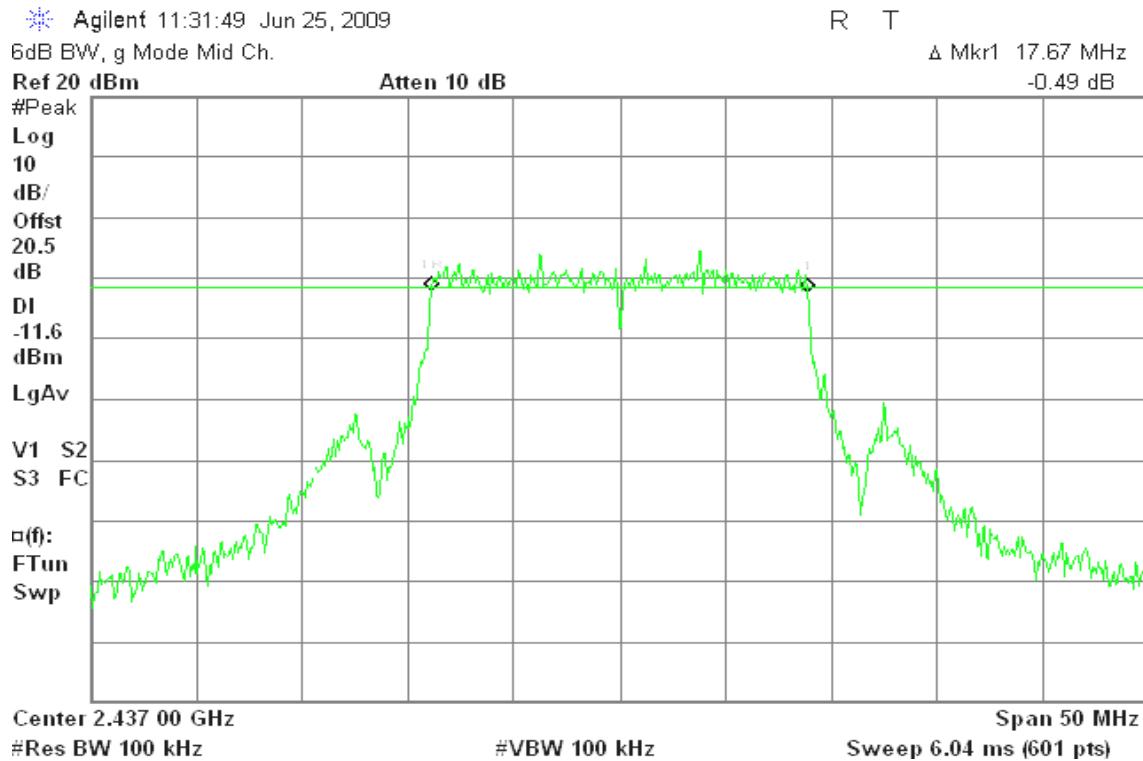


6dB Bandwidth (CH High)

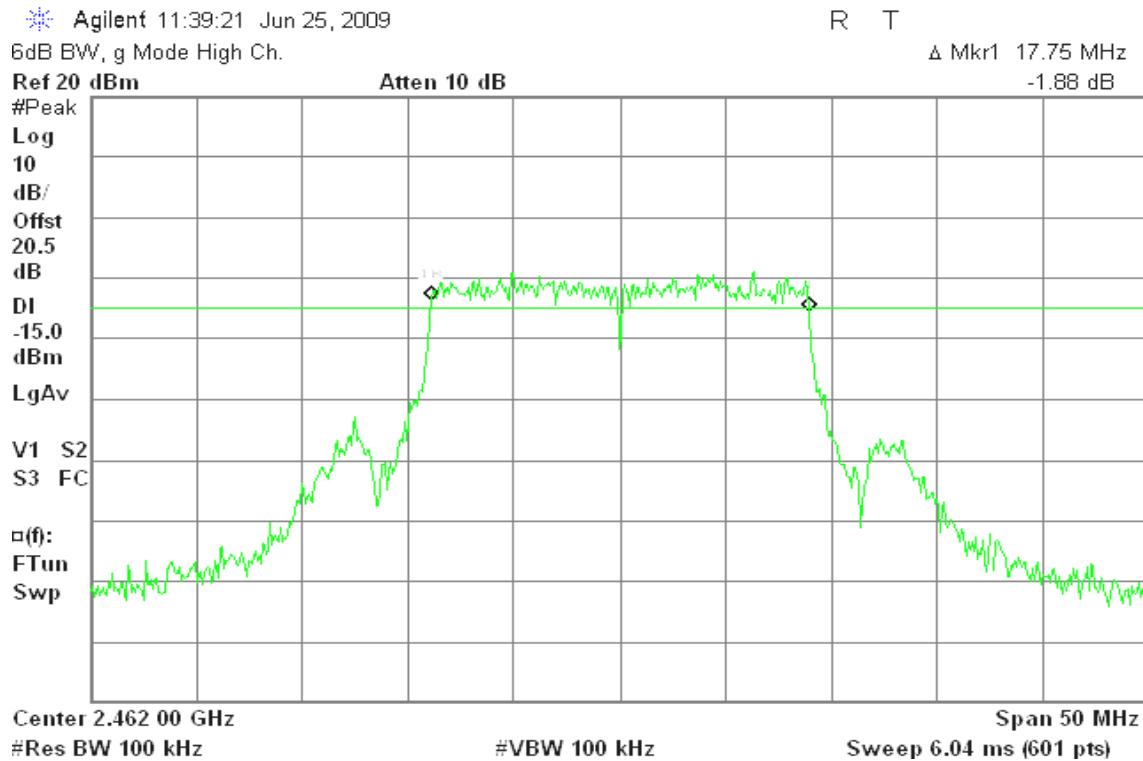

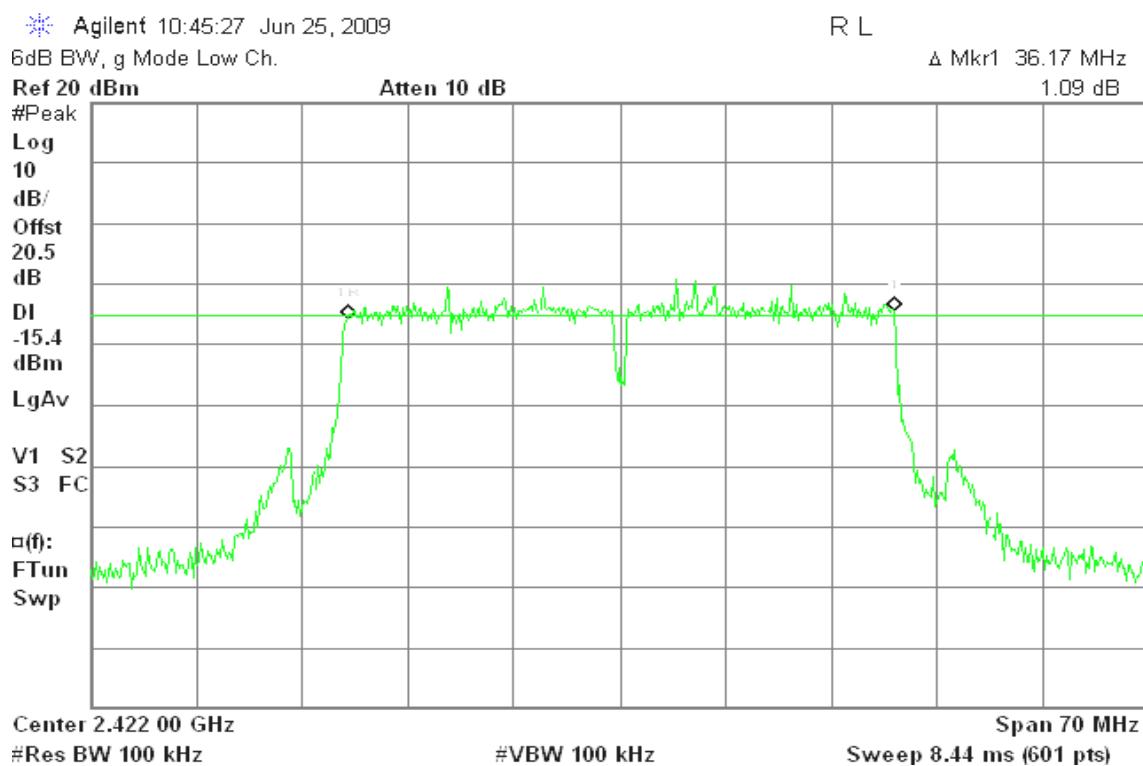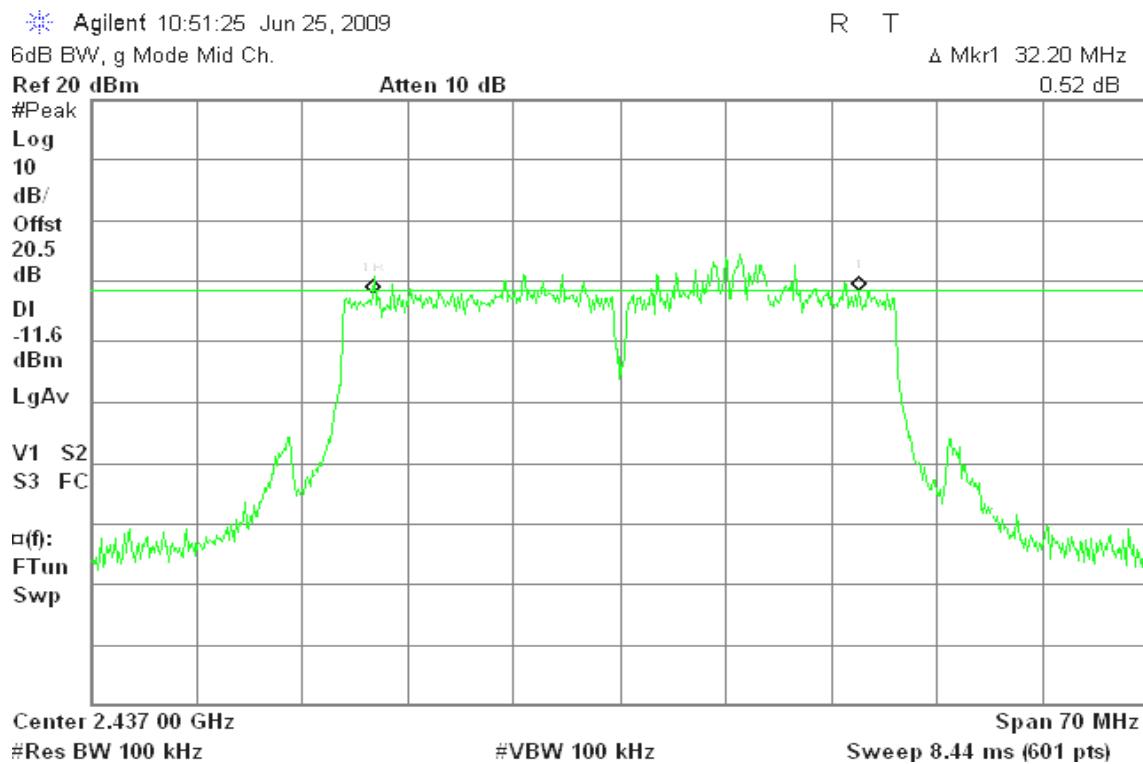
draft 802.11n Wide-40 MHz Channel mode / Chain 0**6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**

6dB Bandwidth (CH High)

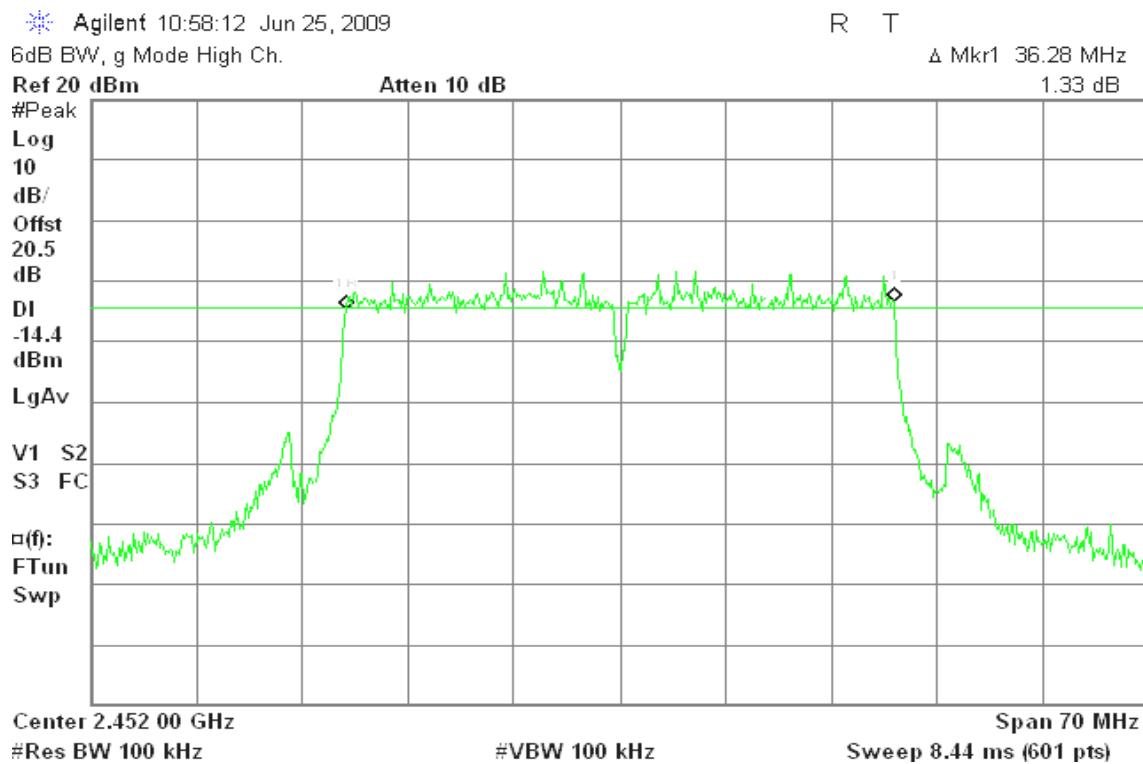


draft 802.11n Wide-40 MHz Channel mode / Chain 1


6dB Bandwidth (CH Low)

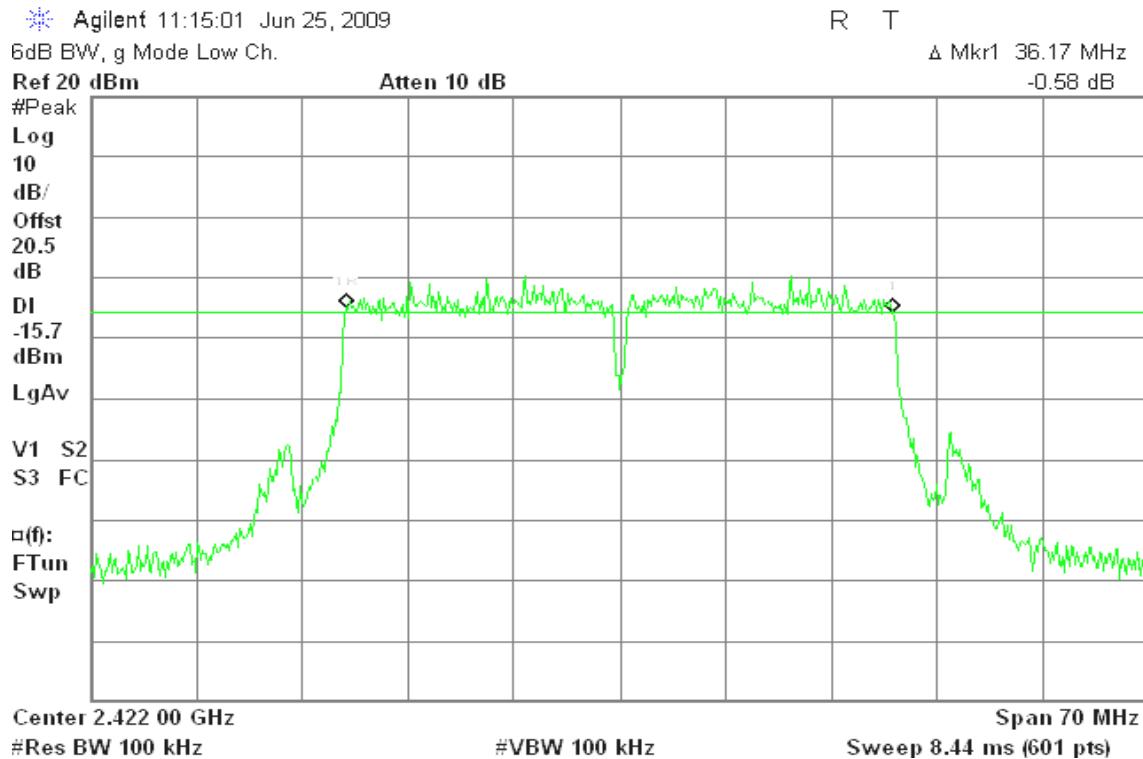

6dB Bandwidth (CH Mid)

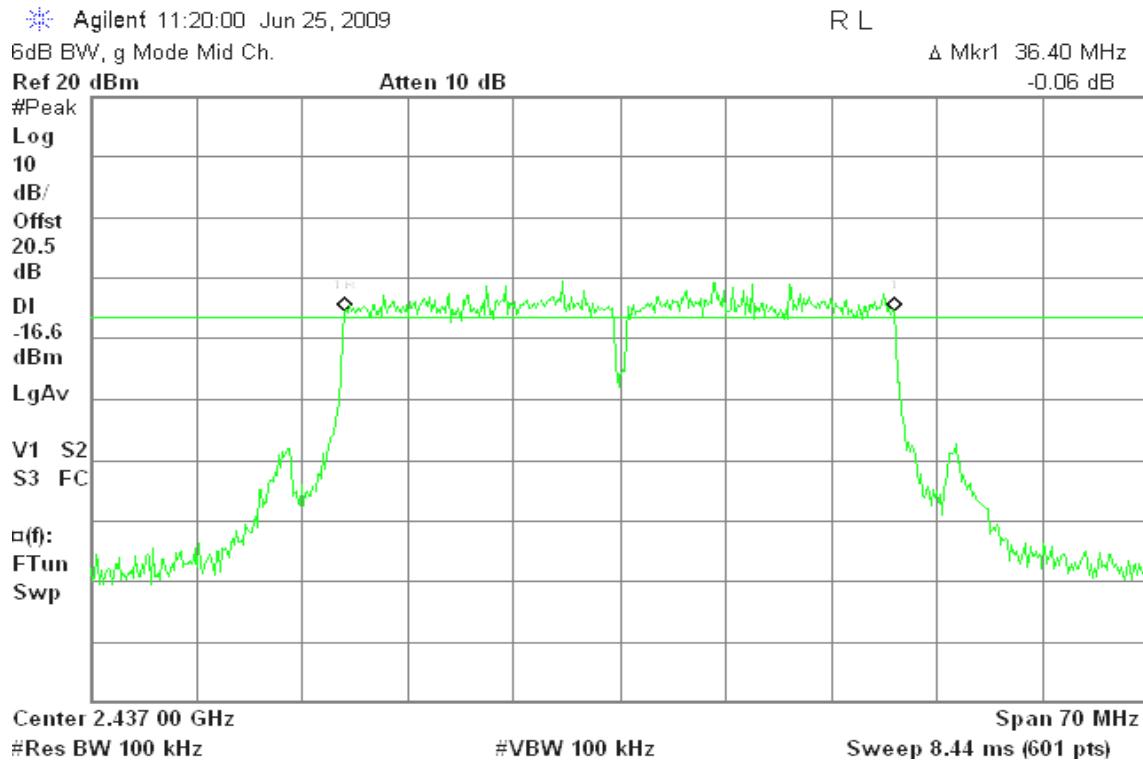

6dB Bandwidth (CH High)

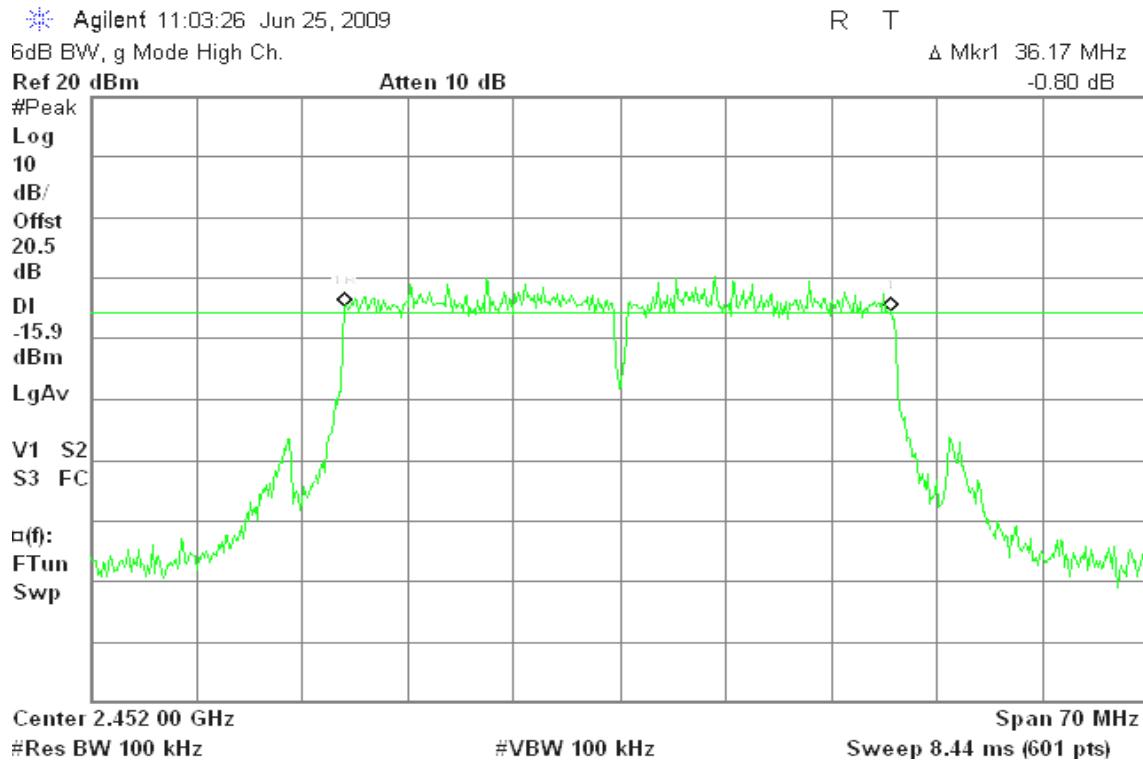


8.3 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3) & RSS-210 §A8.4(4), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

1. Peak power is measured using the spectrum analyzer's internal channel power integration function.
2. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	17.19	0.0524	1.00	PASS
Mid	2437	16.97	0.0498		PASS
High	2462	14.84	0.0305		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	16.62	0.0459	1.00	PASS
Mid	2437	16.64	0.0461		PASS
High	2462	16.63	0.0460		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	15.17	14.39	17.81	0.0604	1.00	PASS
Mid	2437	15.38	14.32	17.89	0.0616		PASS
High	2462	13.17	12.64	15.92	0.0391		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode


Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	12.69	12.65	15.68	0.0370	1.00	PASS
Mid	2437	13.92	12.37	16.22	0.0419		PASS
High	2452	13.88	12.85	16.41	0.0437		PASS

Remark: Total Output Power (w) = Chain 0 ($10^{(Output\ Power\ /10)/1000}$) + Chain 1 ($10^{(Output\ Power\ /10)/1000}$)


Test Plot

IEEE 802.11b mode


Peak Power (CH Low)

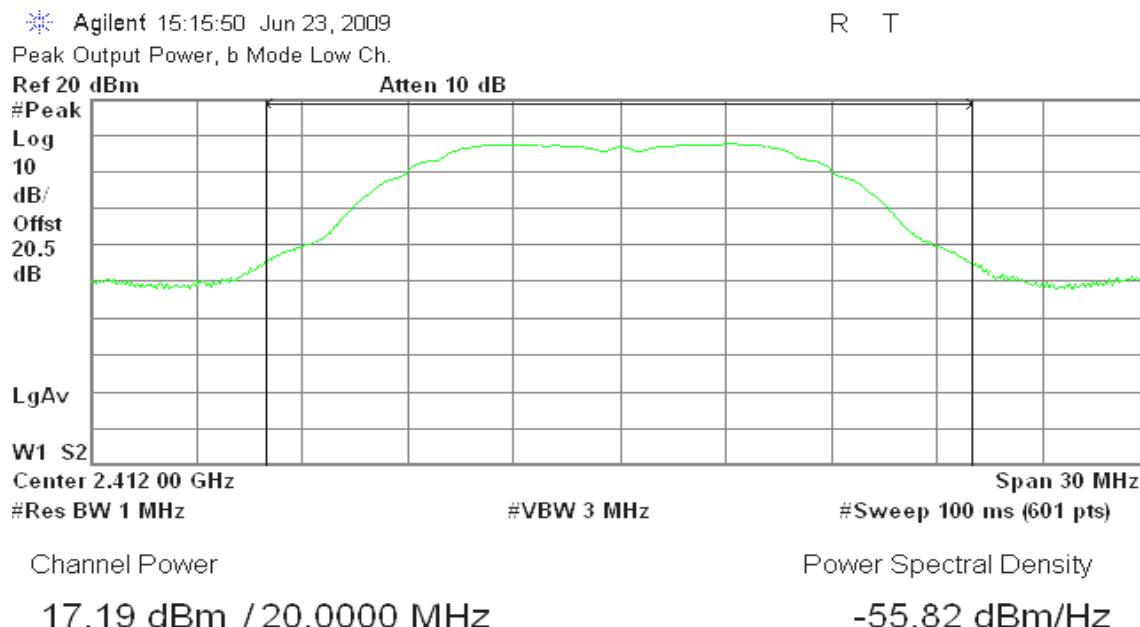

Peak Power (CH Mid)

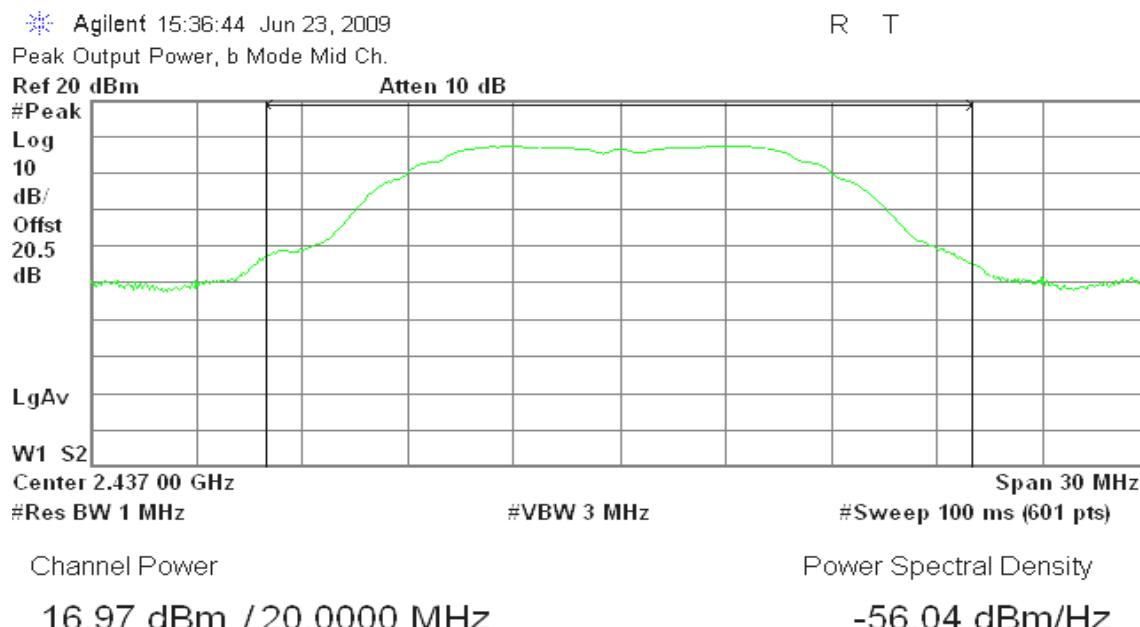


Peak Power (CH High)

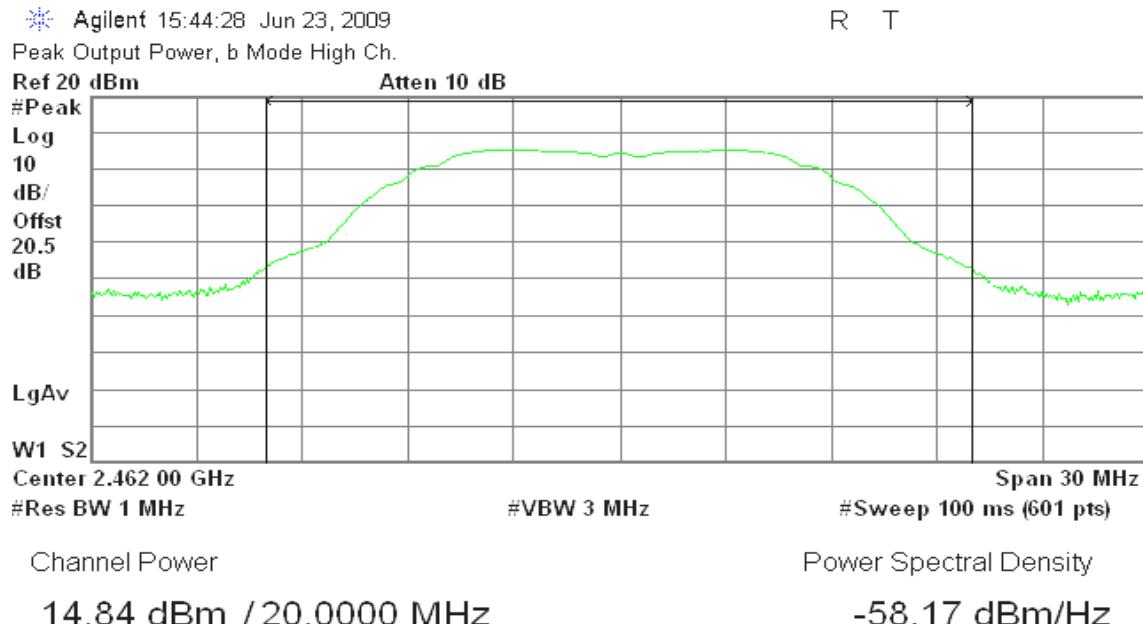


IEEE 802.11g mode


Peak Power (CH Low)


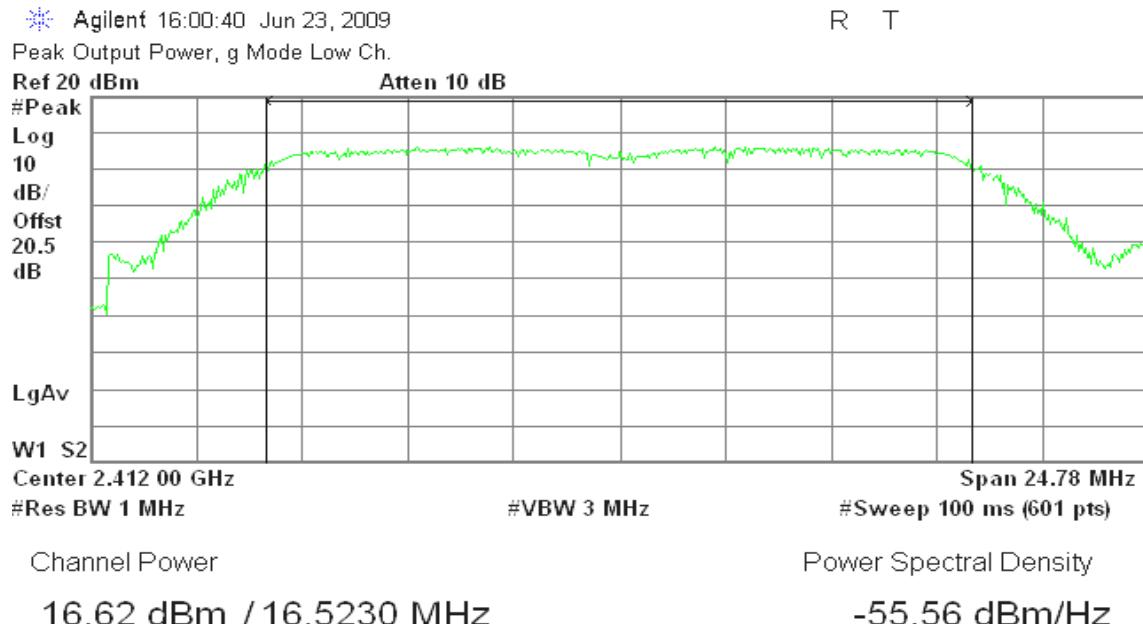


Peak Power (CH Mid)

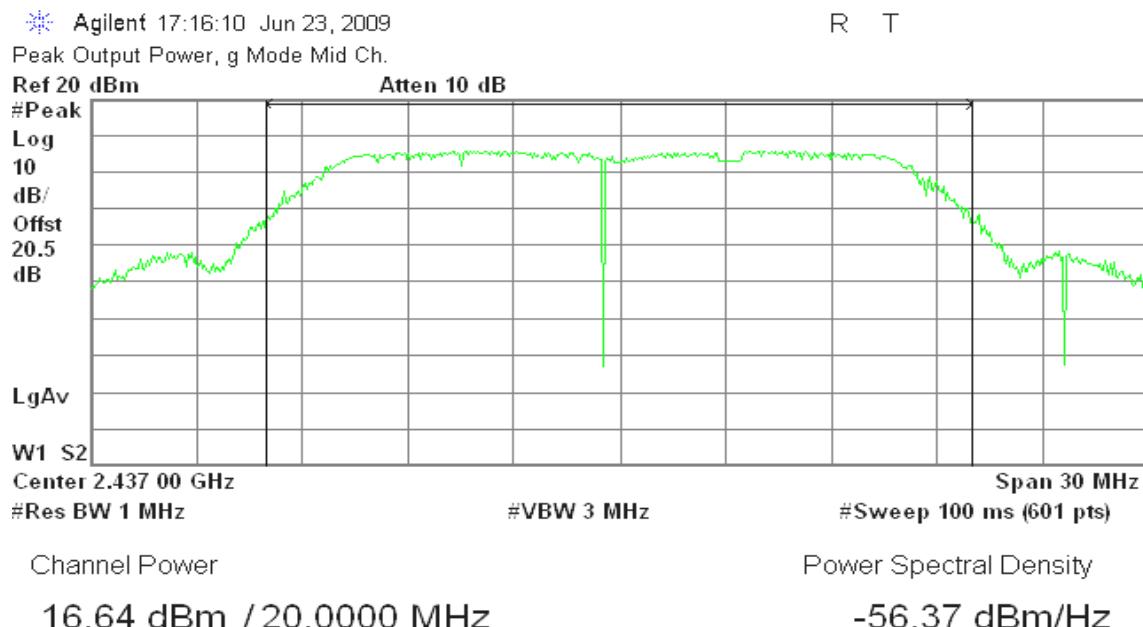


Peak Power (CH High)

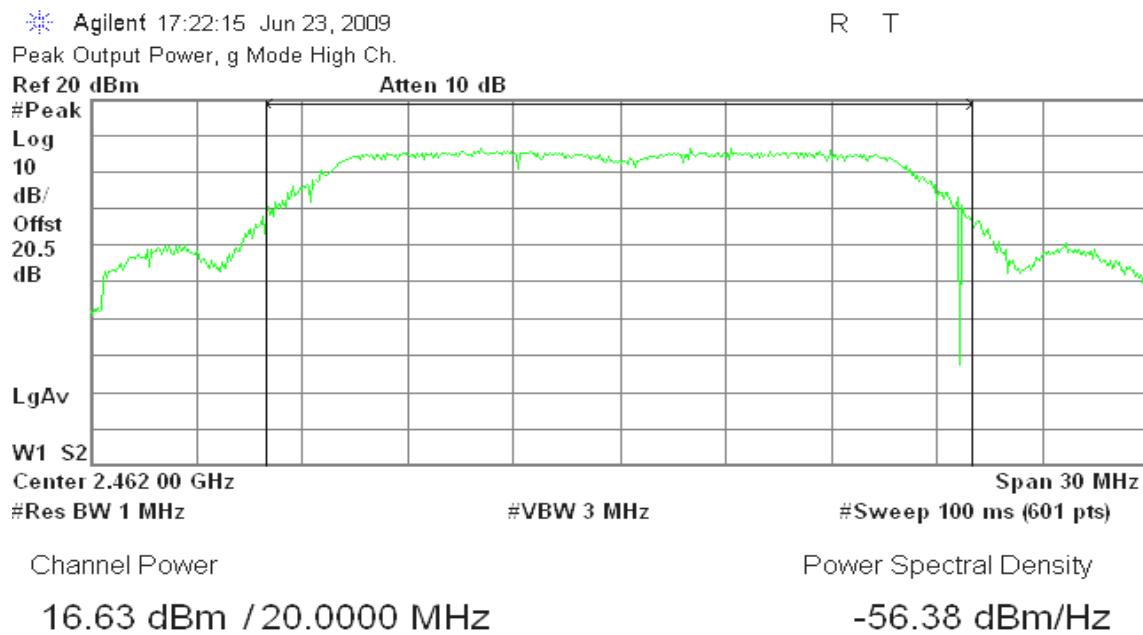

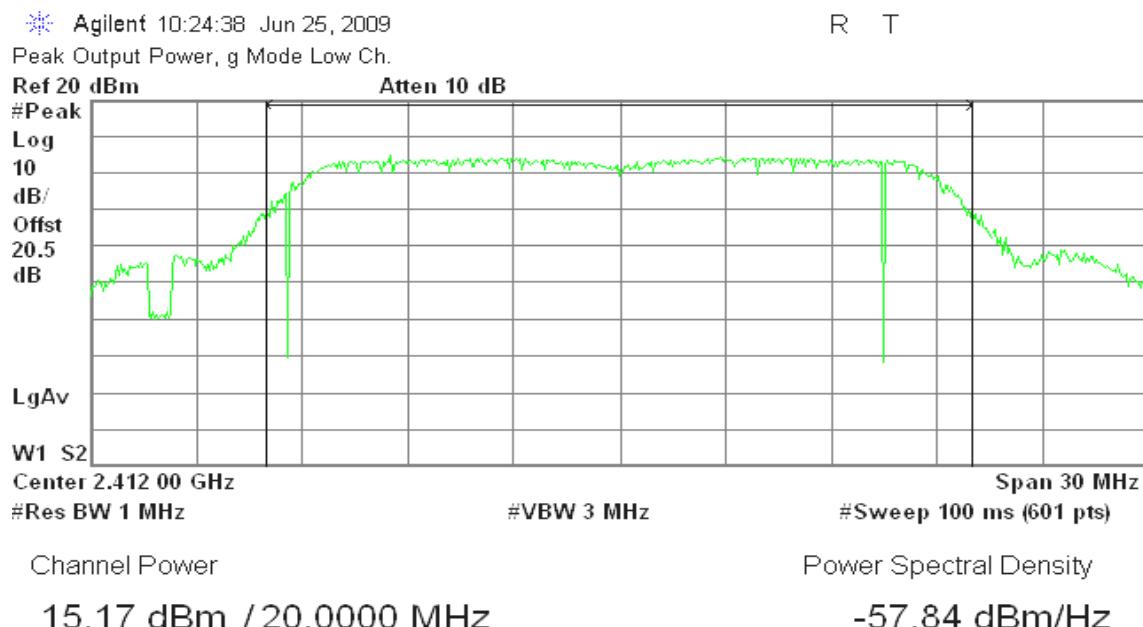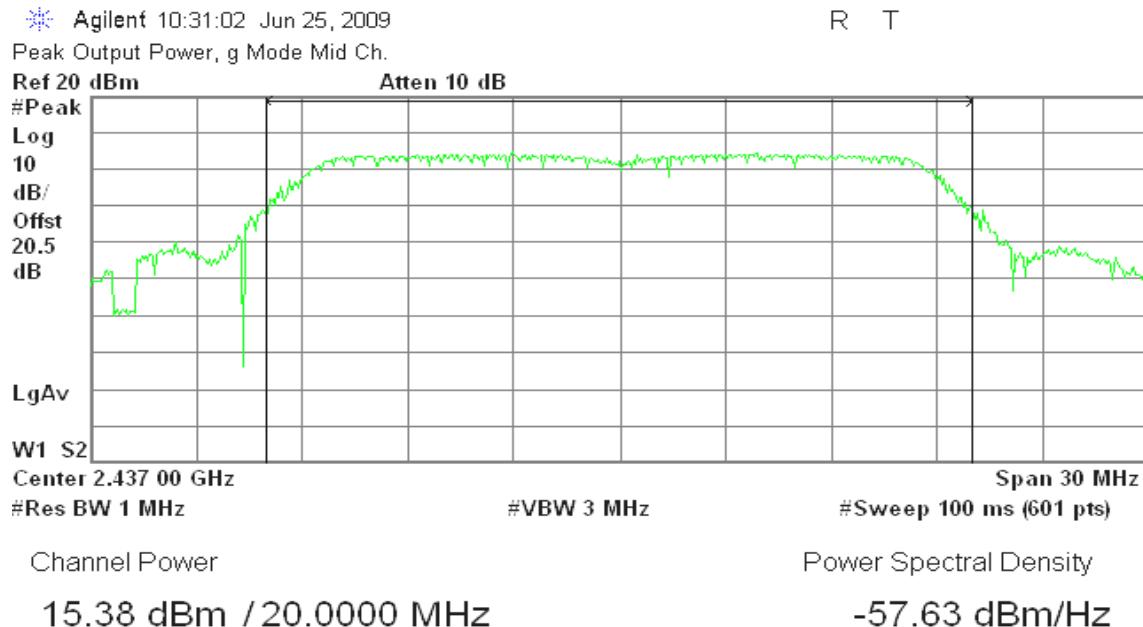
draft 802.11n Standard-20 MHz Channel mode / Chain 0**Peak Power (CH Low)****Peak Power (CH Mid)**

Peak Power (CH High)

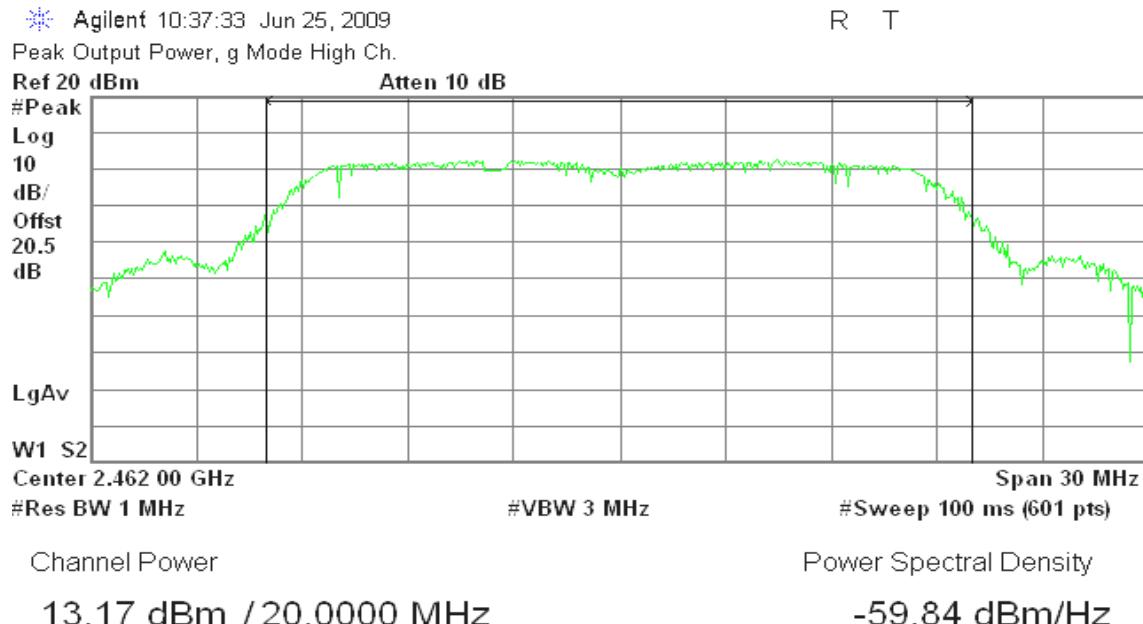


draft 802.11n Standard-20 MHz Channel mode / Chain 1


Peak Power (CH Low)


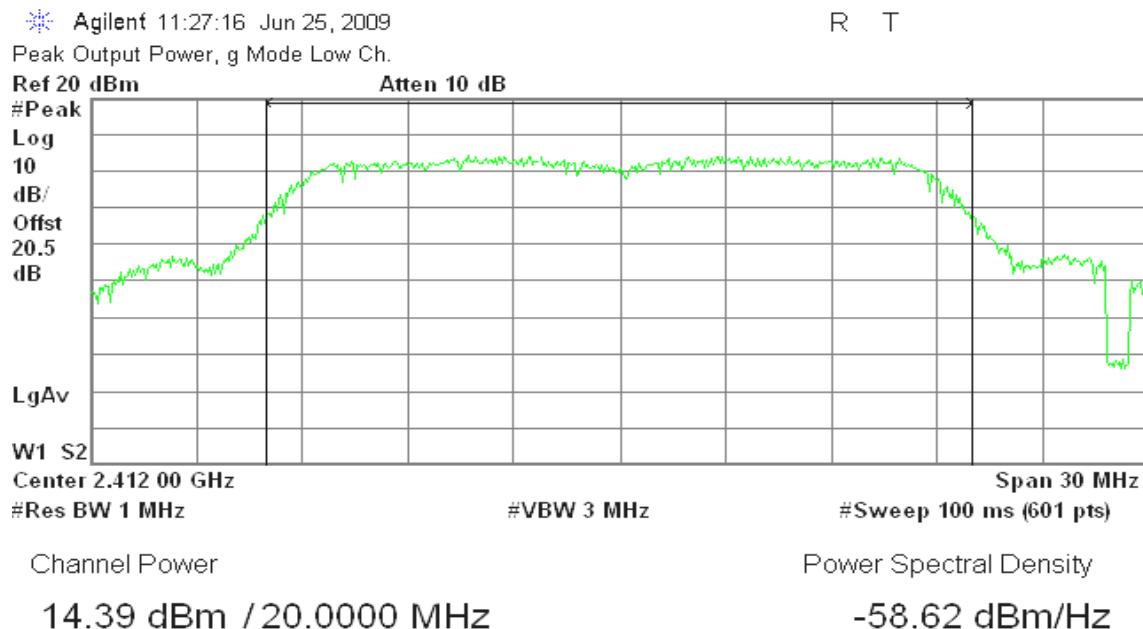


Peak Power (CH Mid)

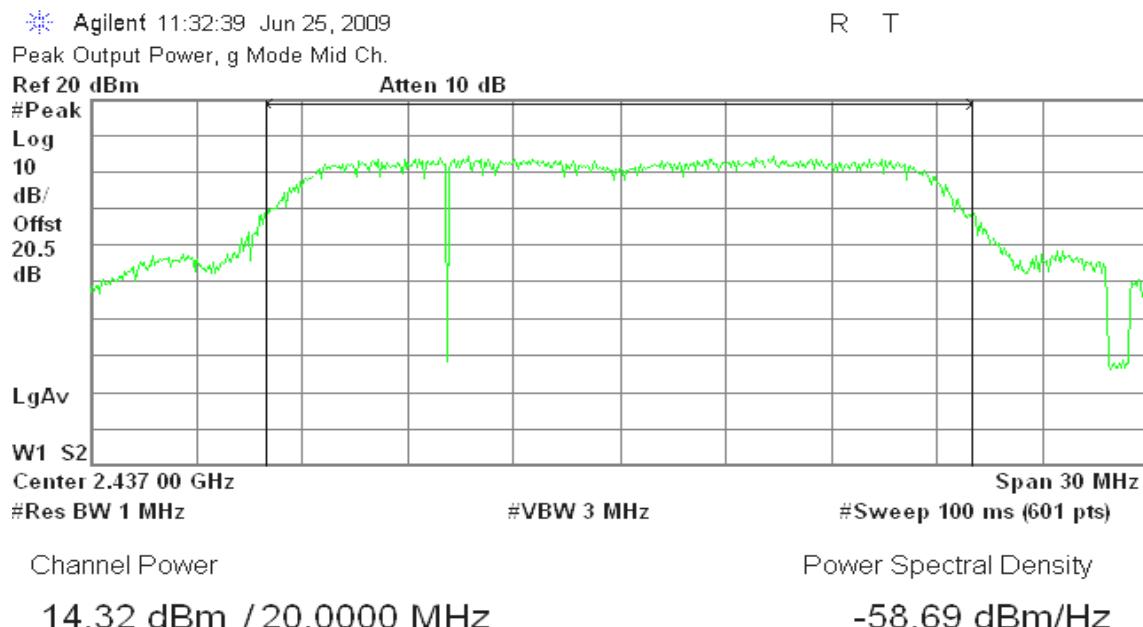


Peak Power (CH High)

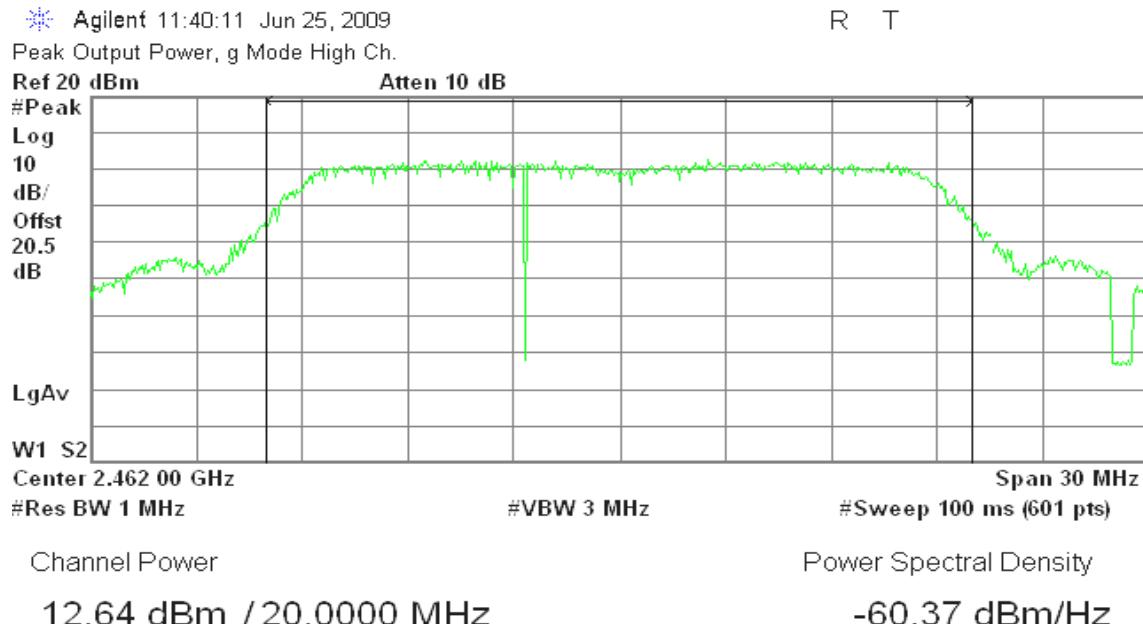

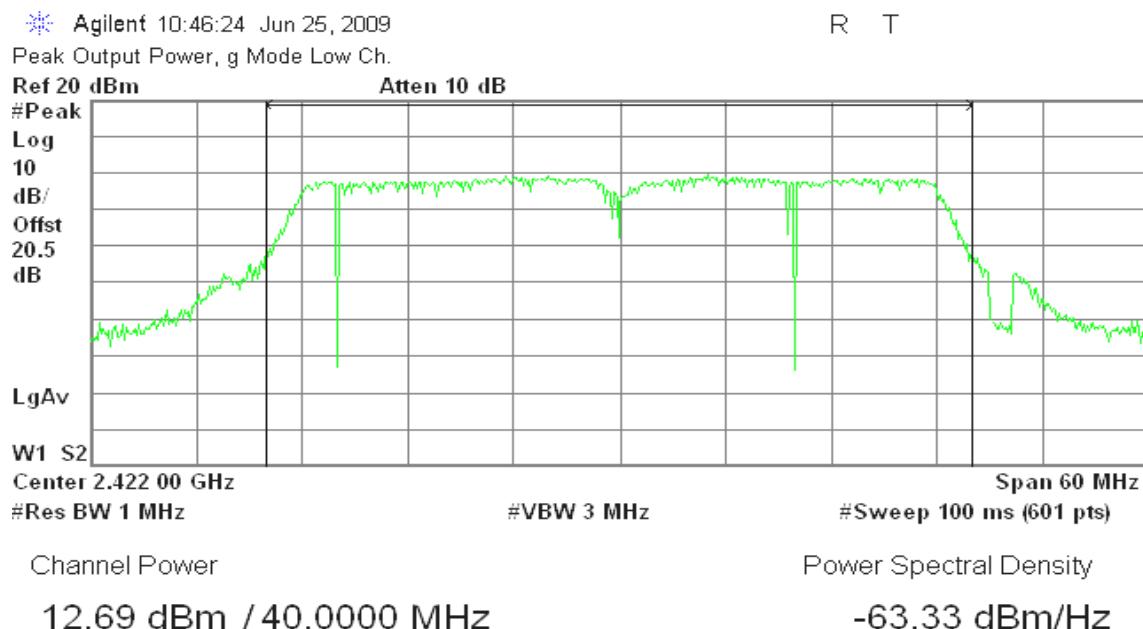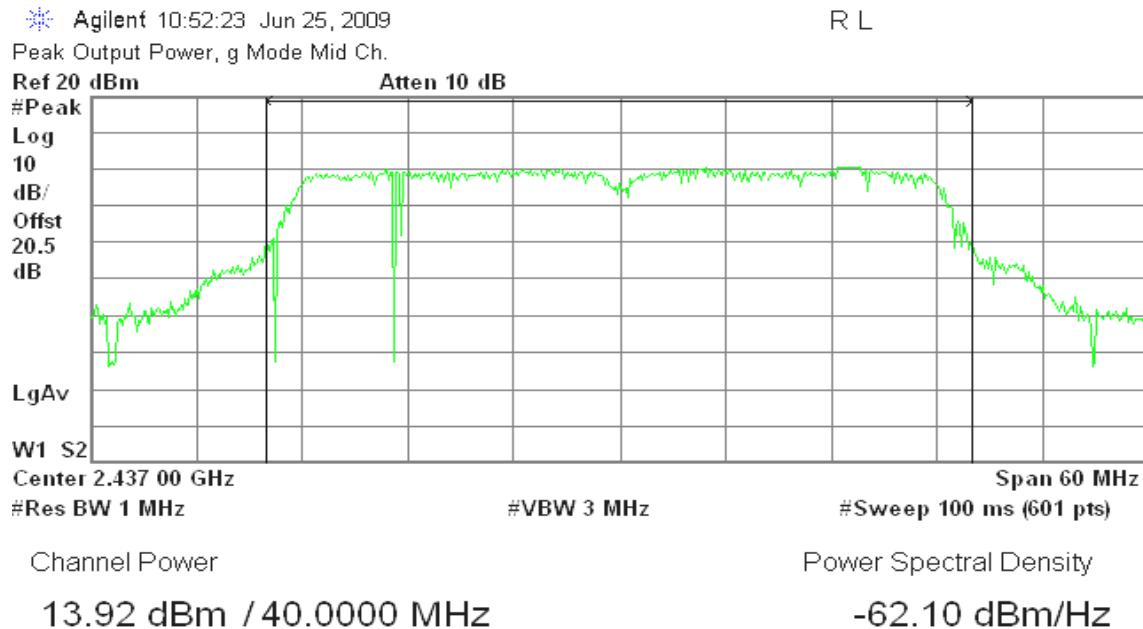
draft 802.11n Wide-40 MHz Channel mode / Chain 0**Peak Power (CH Low)****Peak Power (CH Mid)**

Peak Power (CH High)

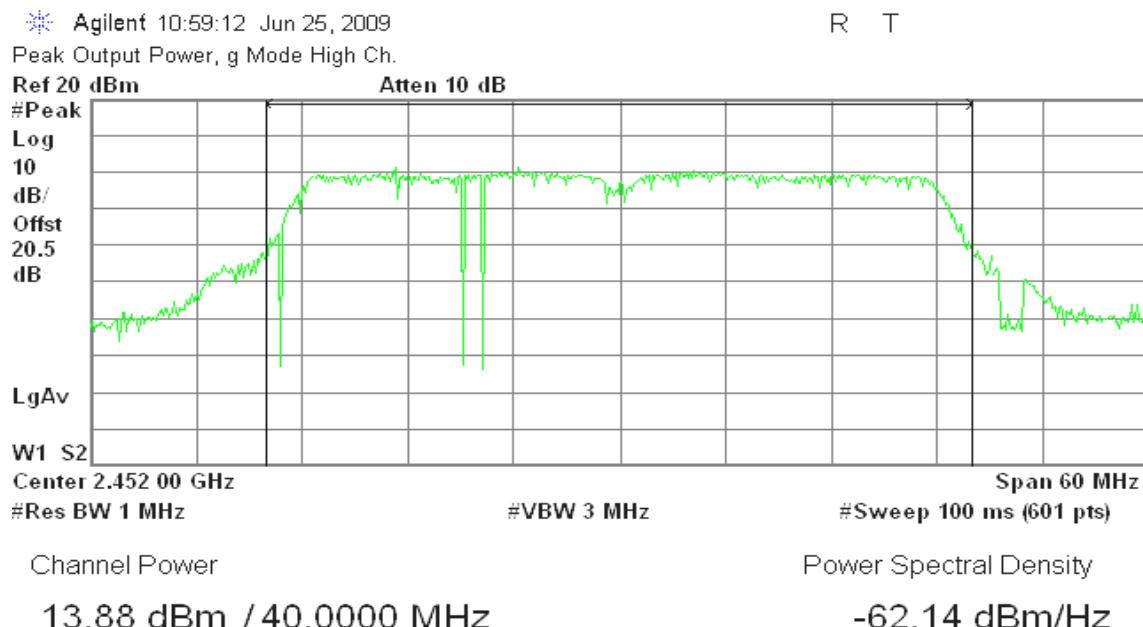


draft 802.11n Wide-40 MHz Channel mode / Chain 1


Peak Power (CH Low)

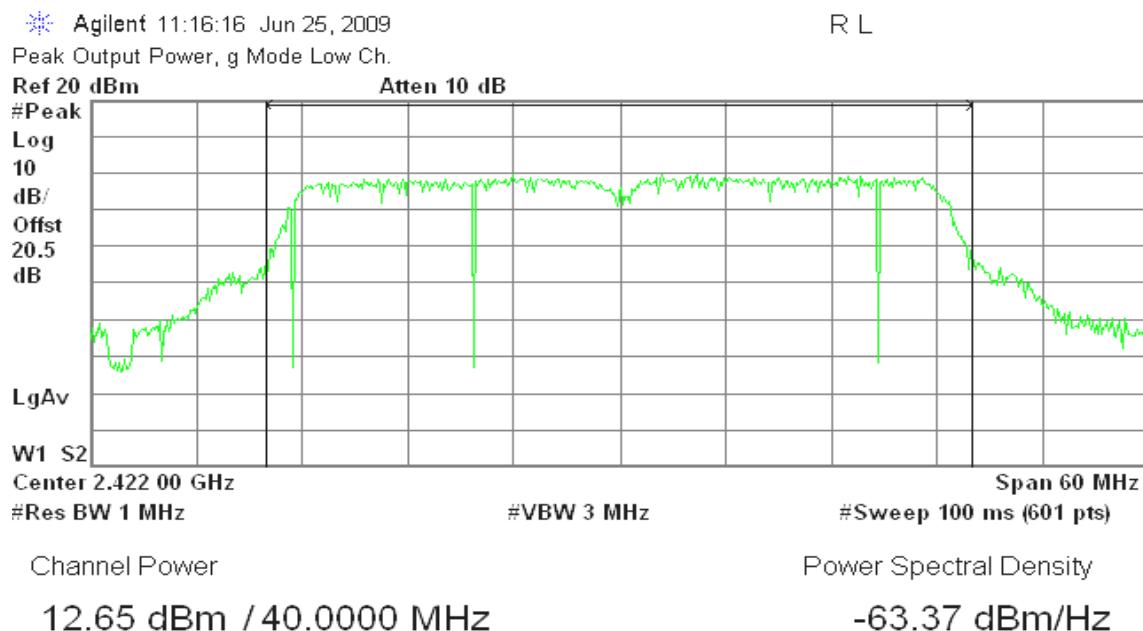

Peak Power (CH Mid)

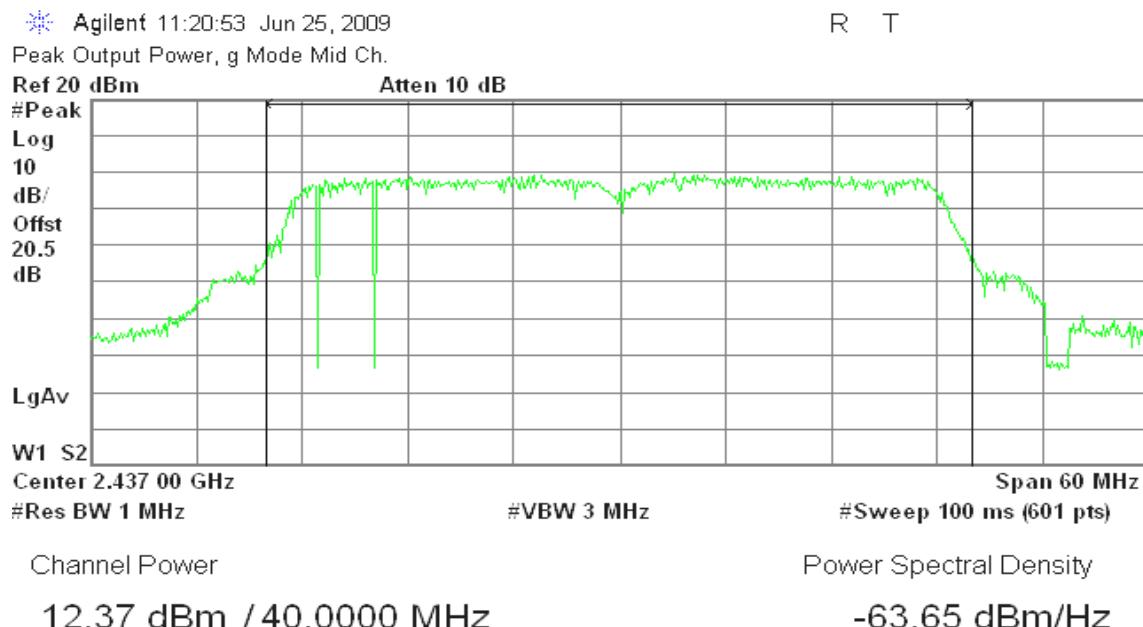

Peak Power (CH High)

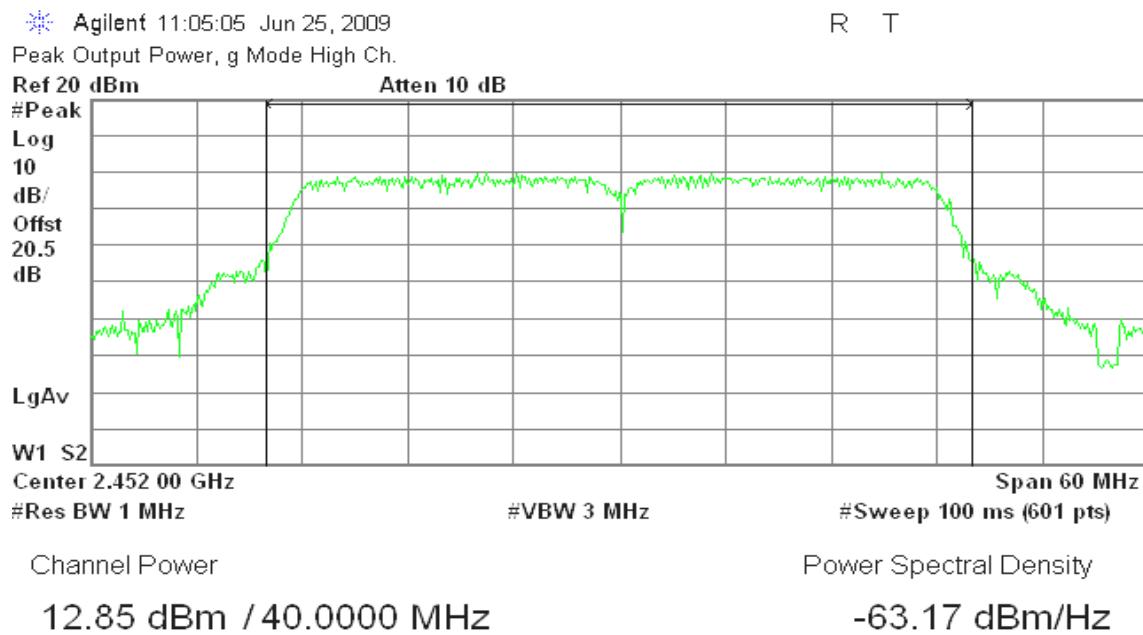


8.4 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	14.18	0.0262
Mid	2437	13.96	0.0249
High	2462	11.76	0.0150

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	9.05	0.0080
Mid	2437	9.07	0.0081
High	2462	8.70	0.0074

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2412	7.68	6.69	10.22	0.0105
Mid	2437	7.66	6.13	9.97	0.0099
High	2462	5.71	4.52	8.17	0.0066

Test mode: draft 802.11n Wide-40 MHz Channel mode


Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2422	4.97	4.28	7.65	0.0058
Mid	2437	6.21	3.65	8.13	0.0065
High	2452	6.32	4.63	8.57	0.0072

Remark: Total Output Power (w) = Chain 0 (10^(Output Power /10)/1000) + Chain 1 (10^(Output Power /10)/1000)


Test Plot

IEEE 802.11b mode


Average Power (CH Low)

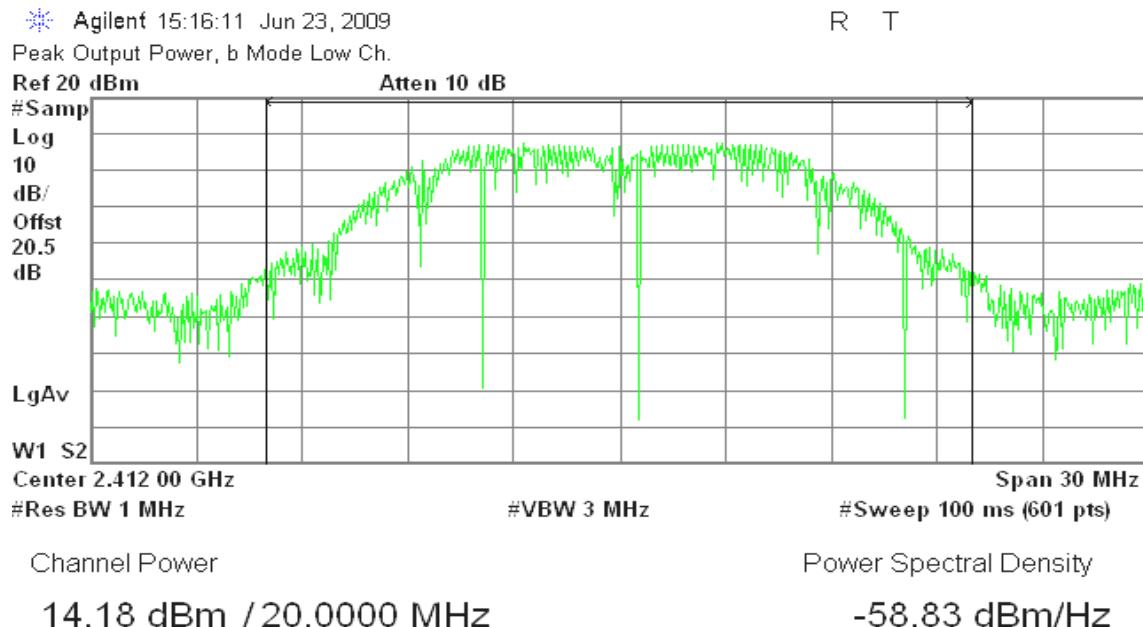

Average Power (CH Mid)

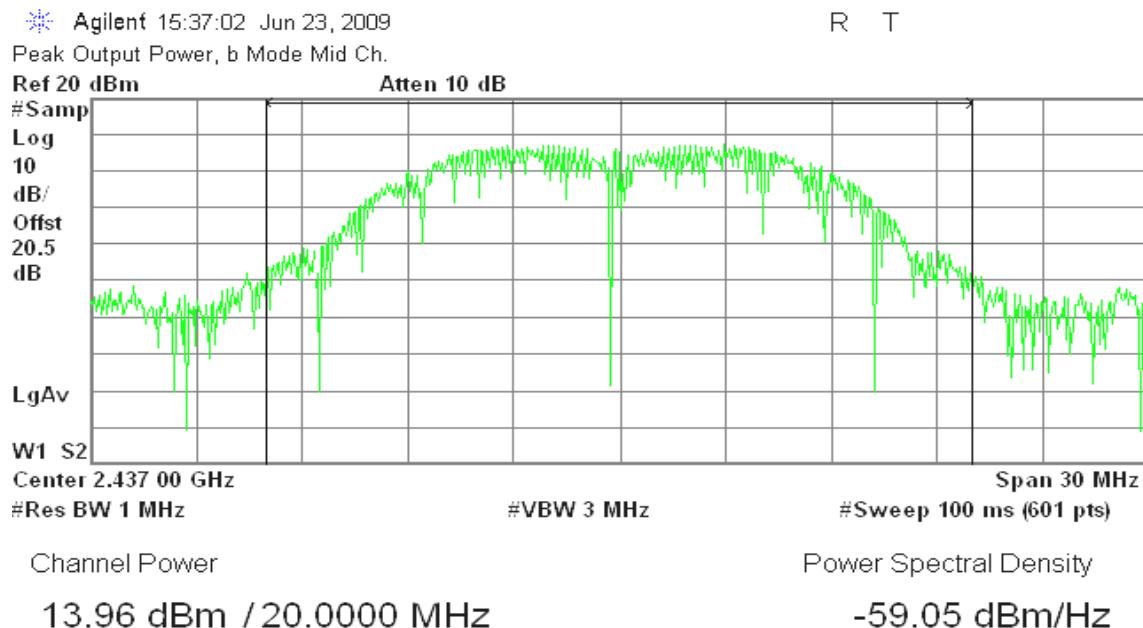


Average Power (CH High)

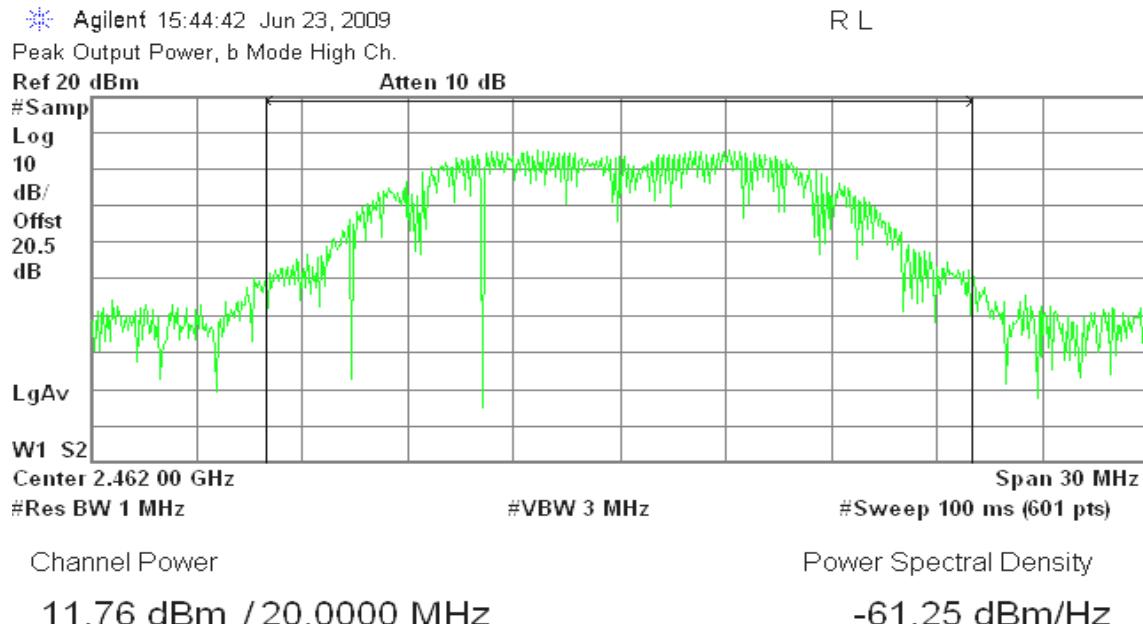


IEEE 802.11g mode


Average Power (CH Low)


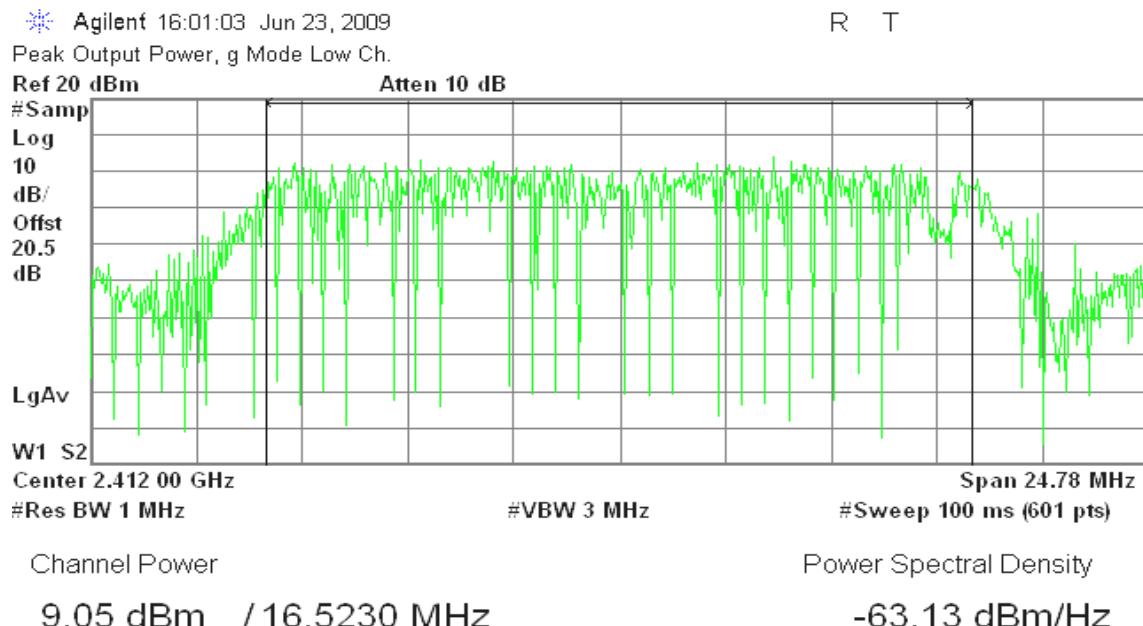


Average Power (CH Mid)

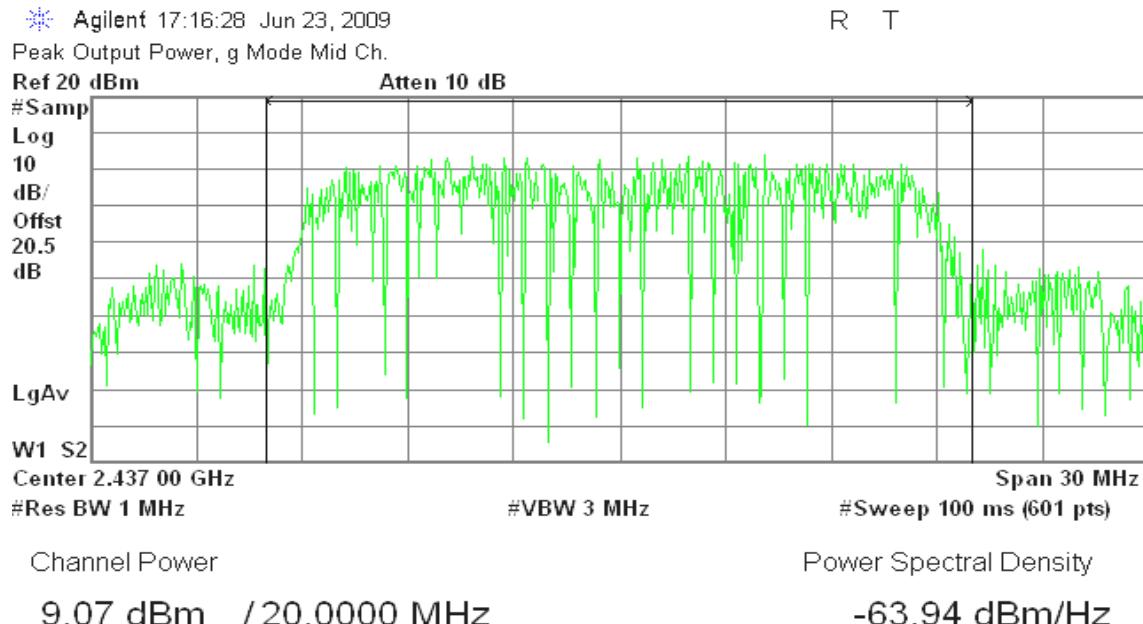


Average Power (CH High)

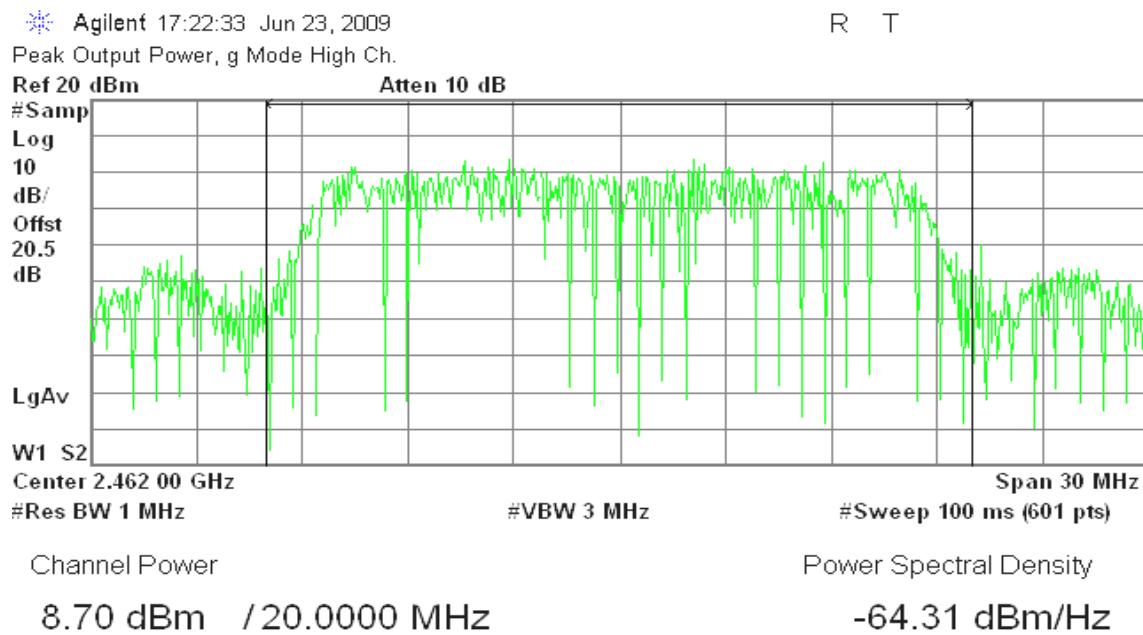

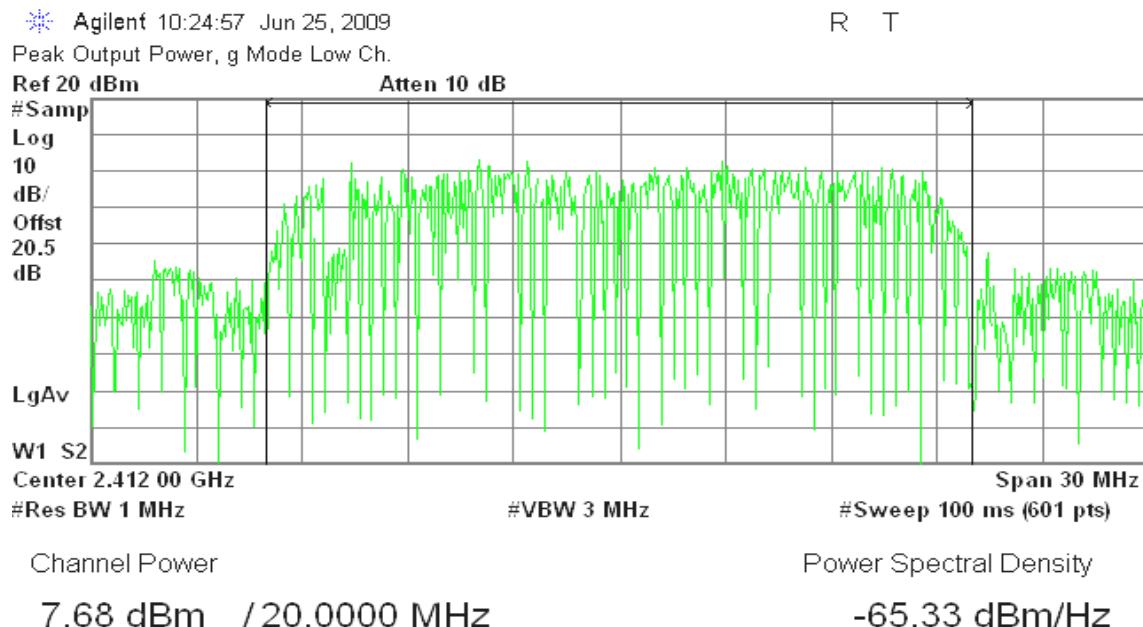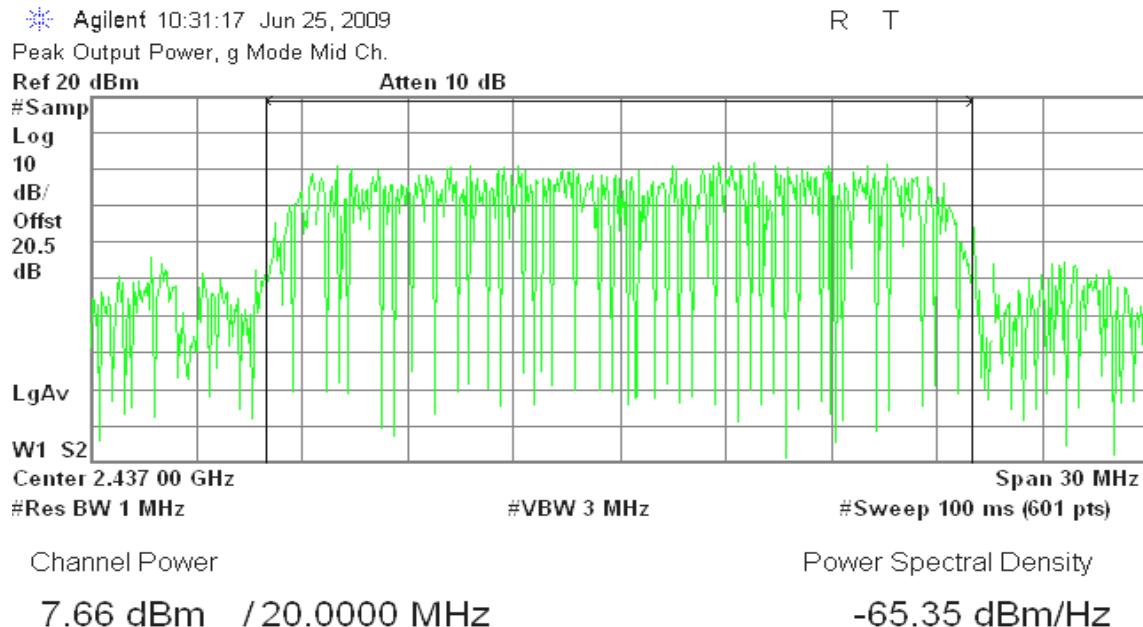
draft 802.11n Standard-20 MHz Channel mode / Chain 0**Average Power (CH Low)****Average Power (CH Mid)**

Average Power (CH High)

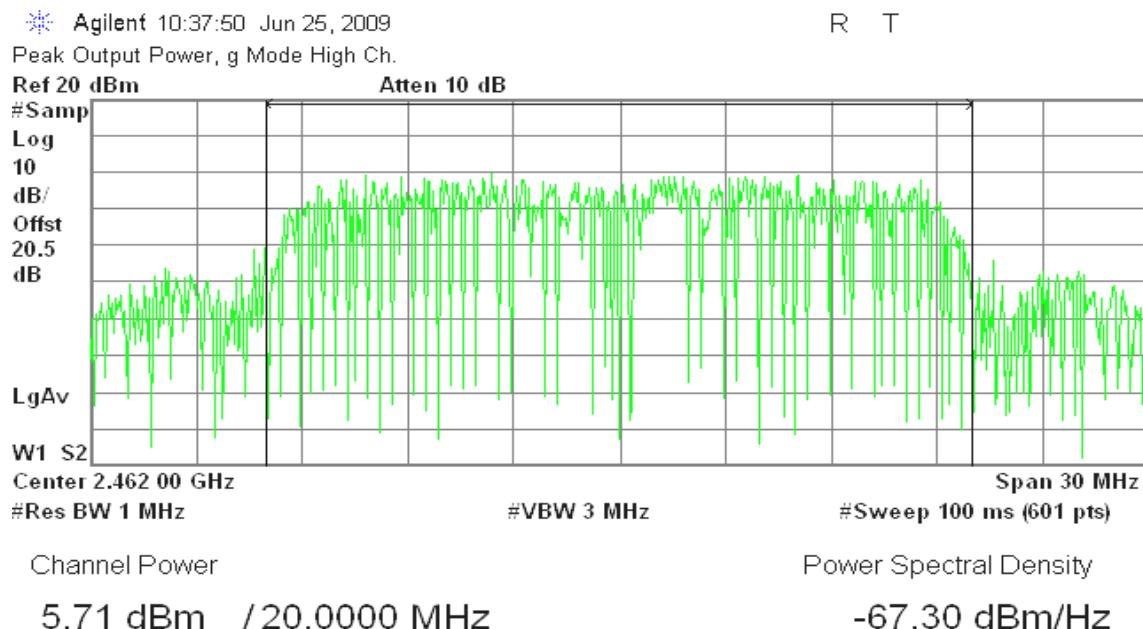


draft 802.11n Standard-20 MHz Channel mode / Chain 1


Average Power (CH Low)


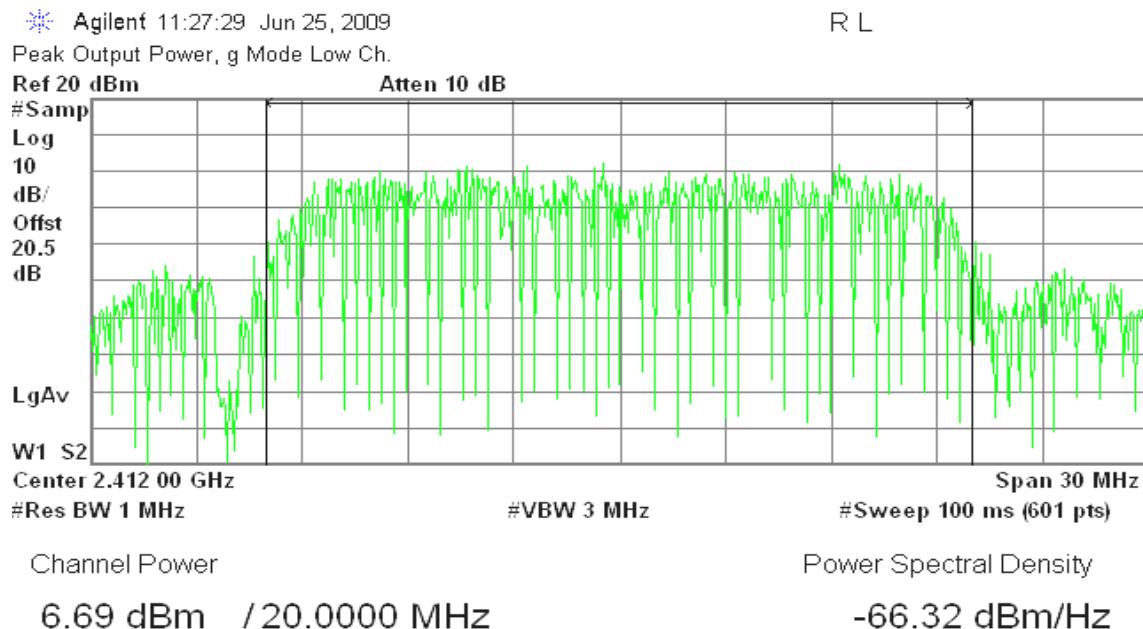


Average Power (CH Mid)

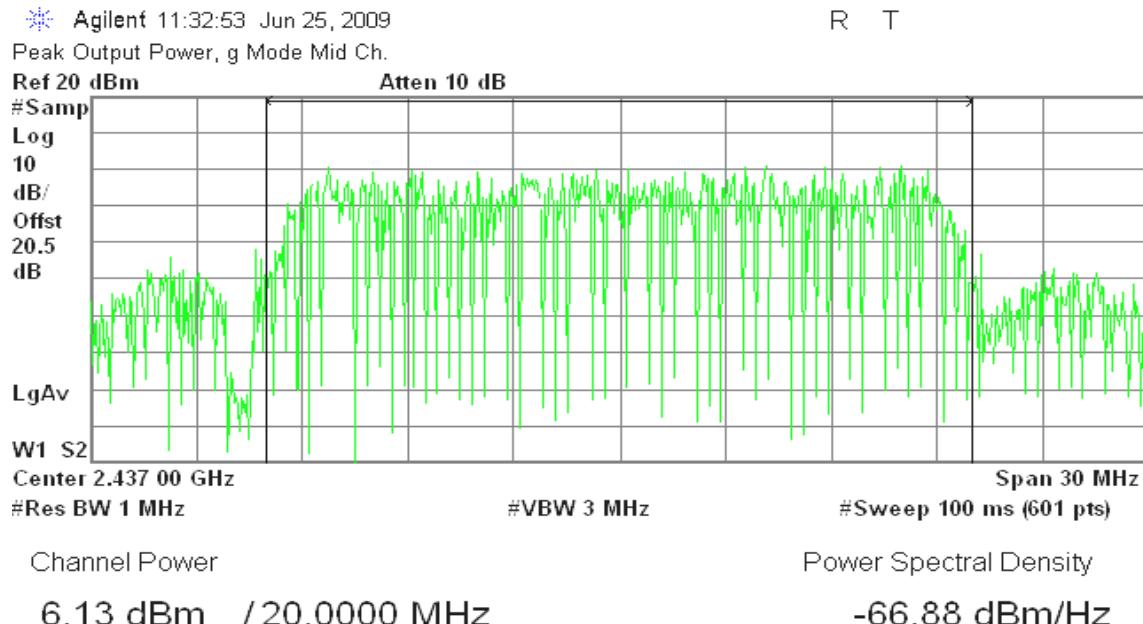


Average Power (CH High)

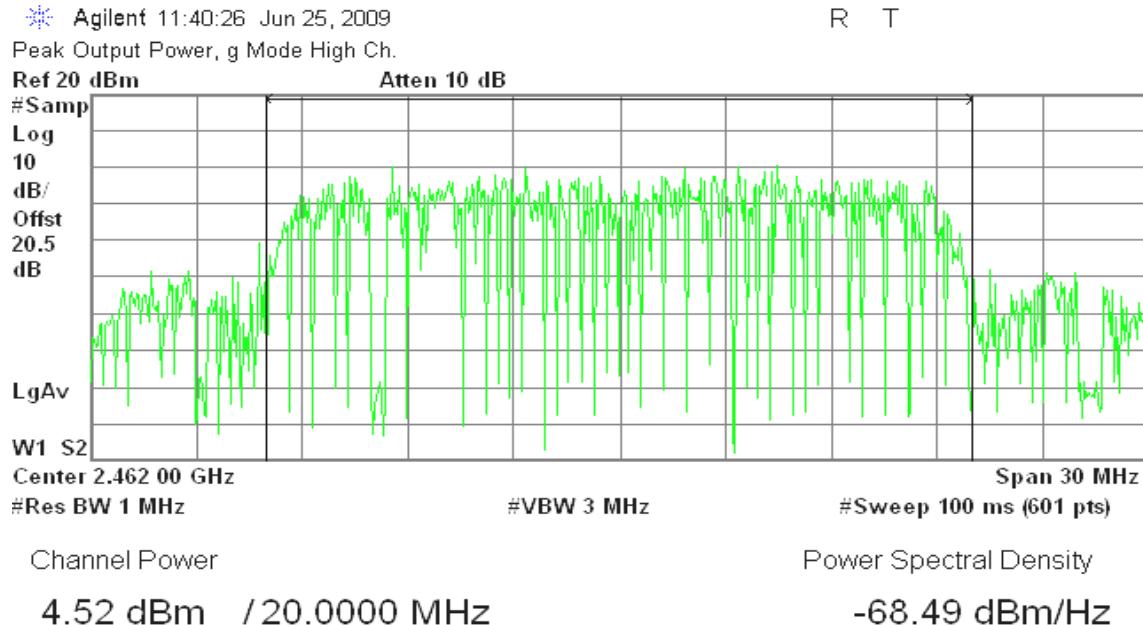

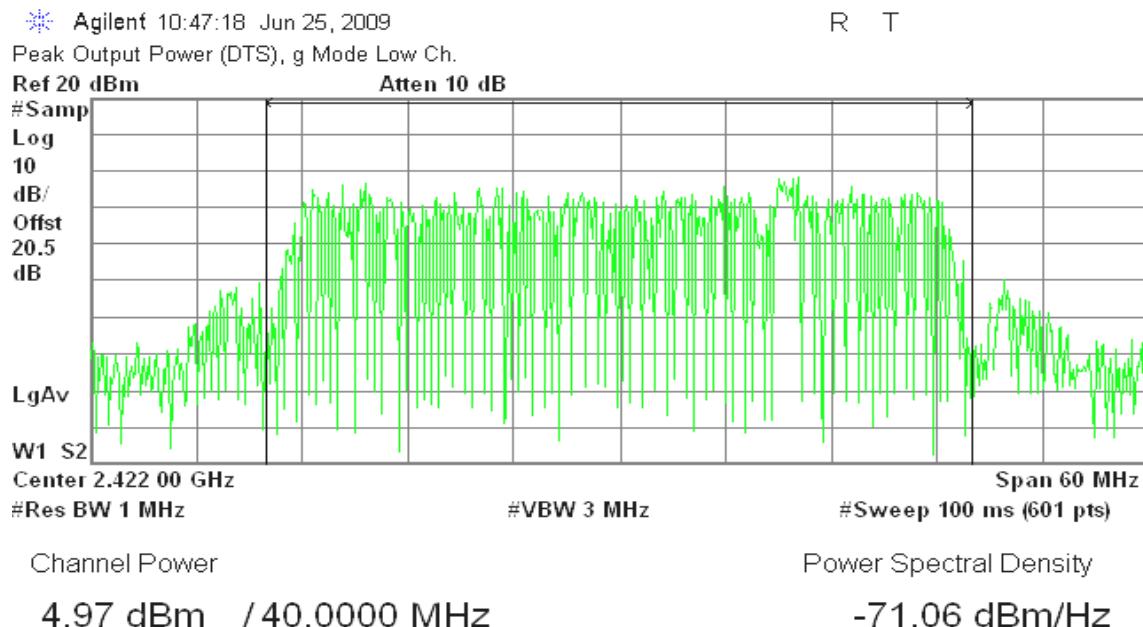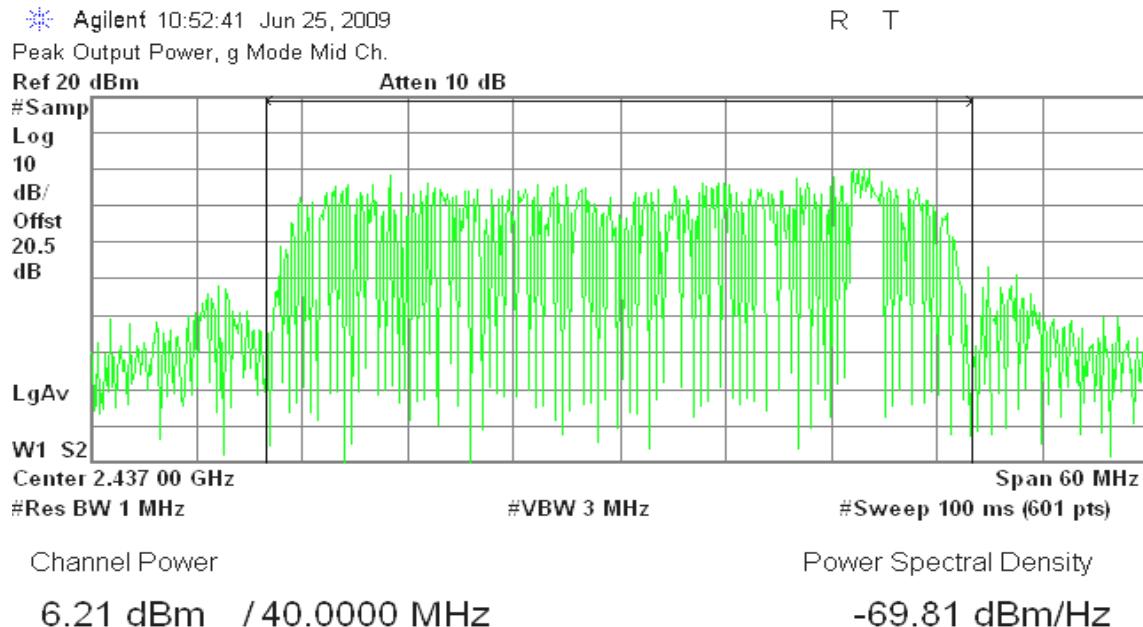
draft 802.11n Wide-40 MHz Channel mode / Chain 0**Average Power (CH Low)****Average Power (CH Mid)**

Average Power (CH High)

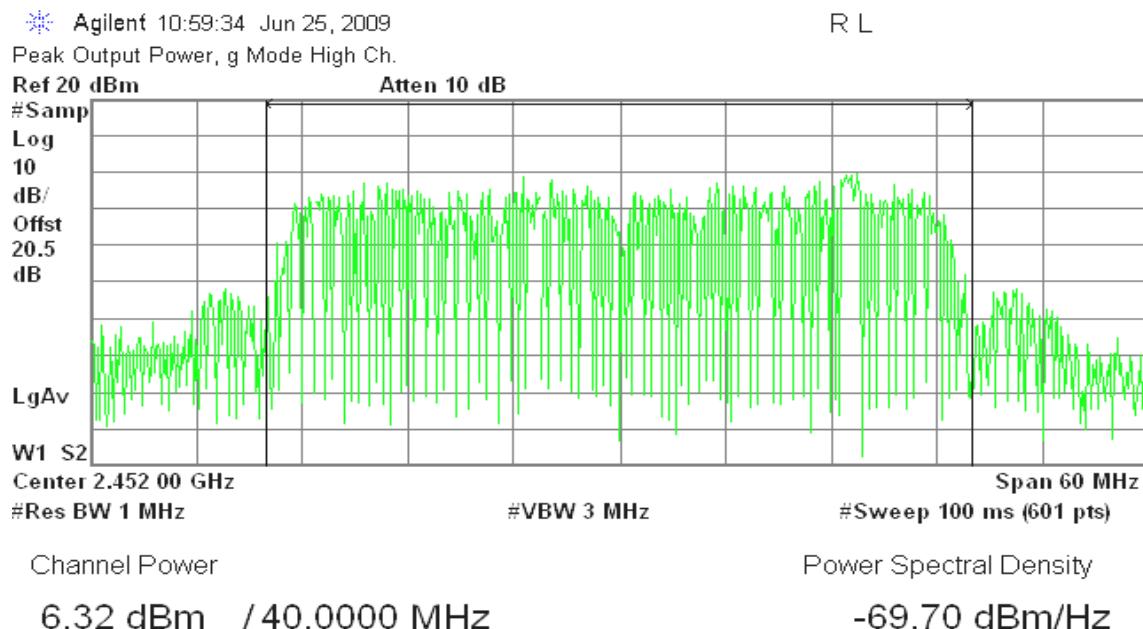


draft 802.11n Wide-40 MHz Channel mode / Chain 1


Average Power (CH Low)

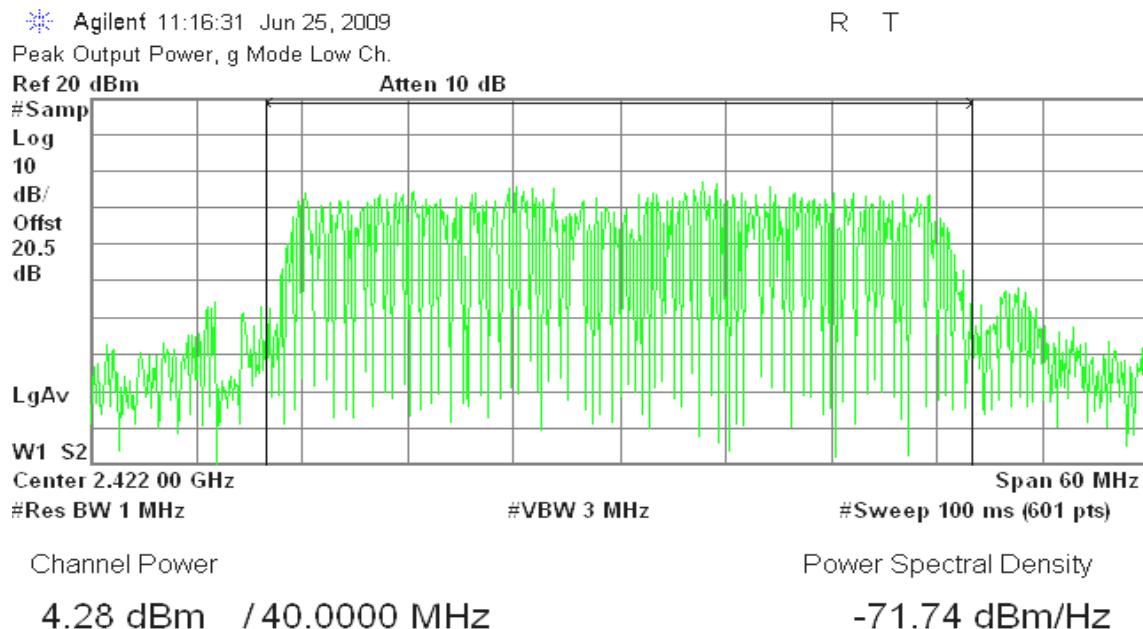

Average Power (CH Mid)

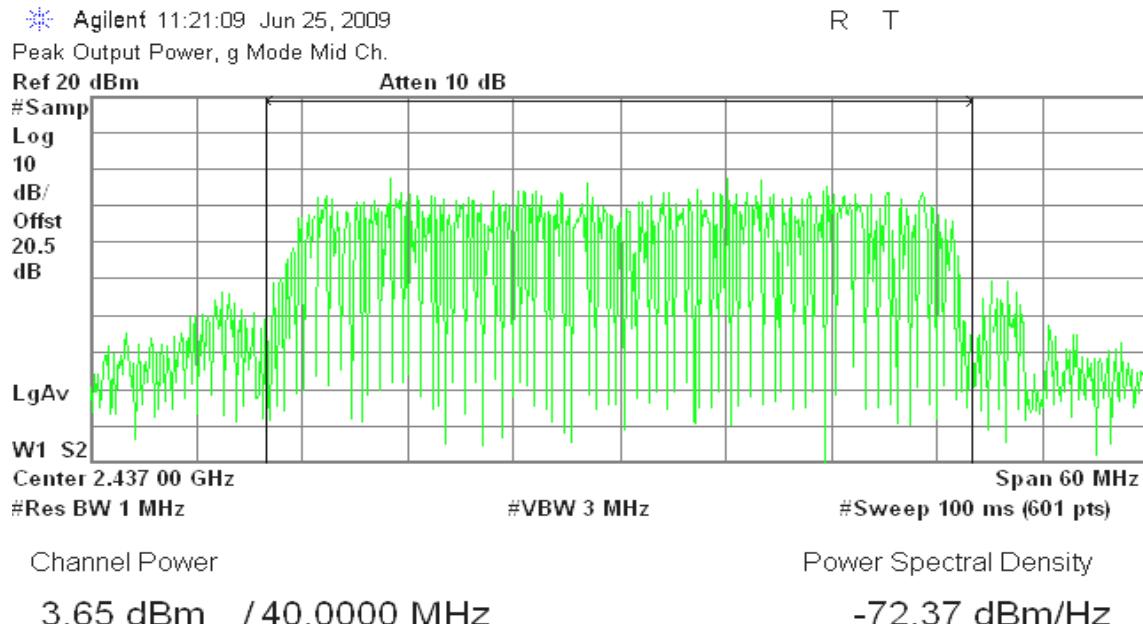

Average Power (CH High)

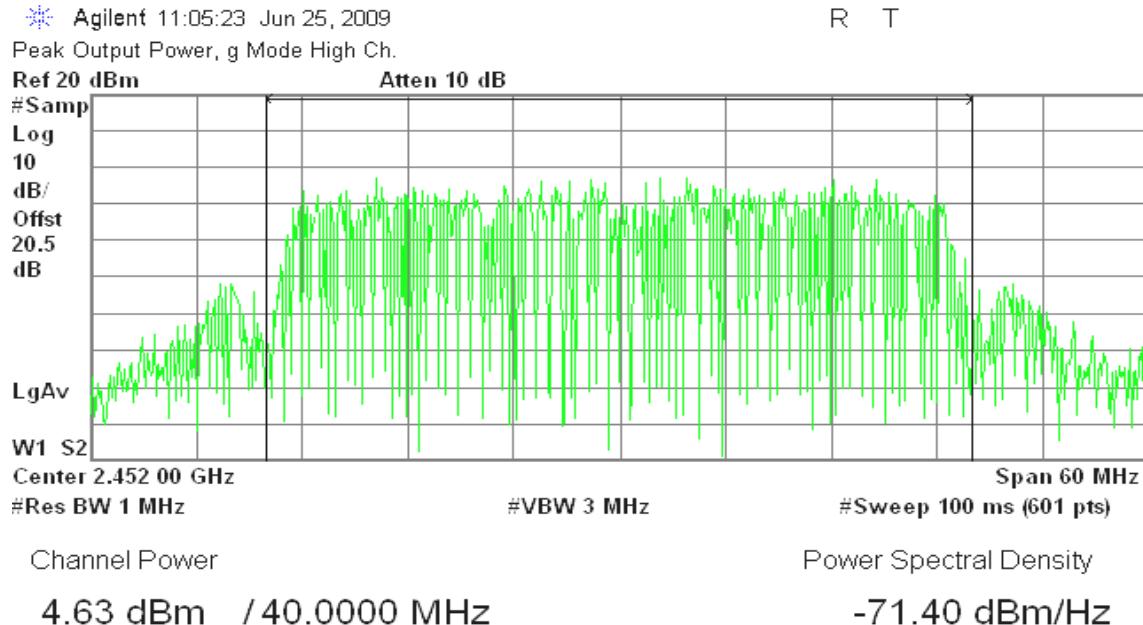


8.5 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d) & RSS-210 §A8.5, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration


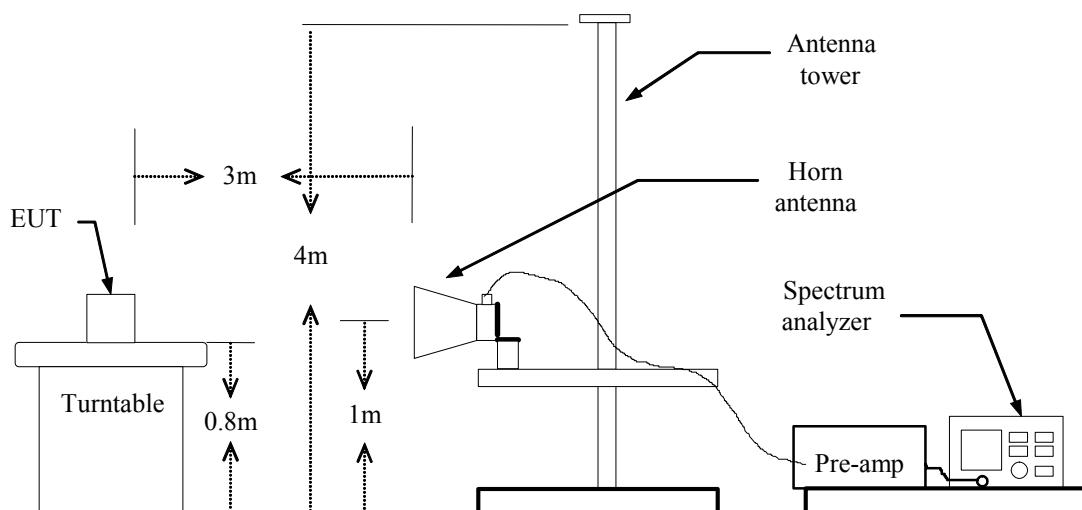




TEST PROCEDURE



1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.



TEST RESULTS



Refer to attach spectrum analyzer data chart.

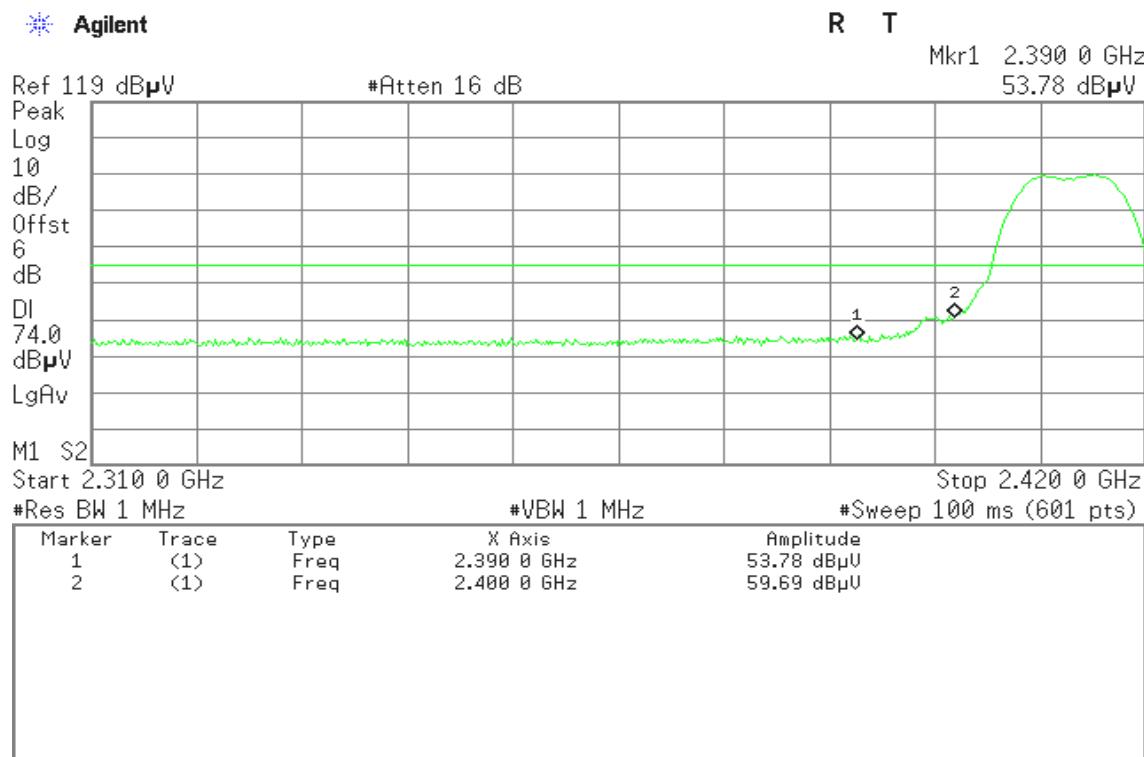
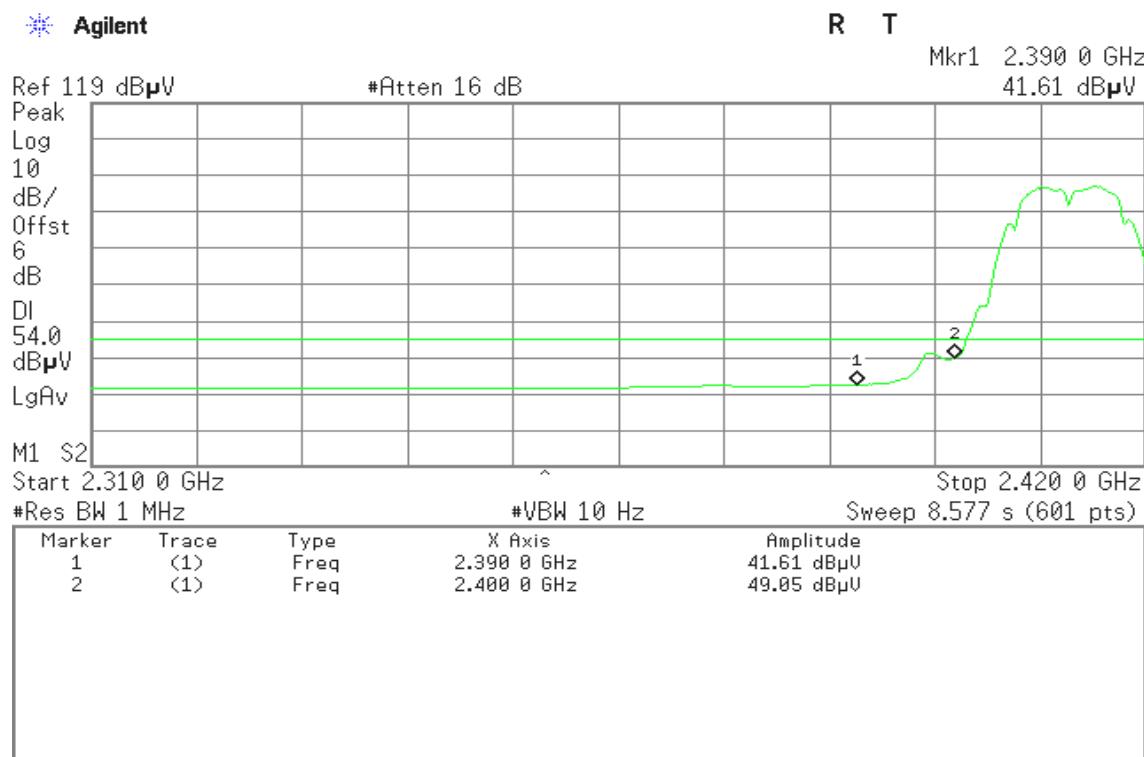
Band Edges (IEEE 802.11b mode / CH Low)**Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

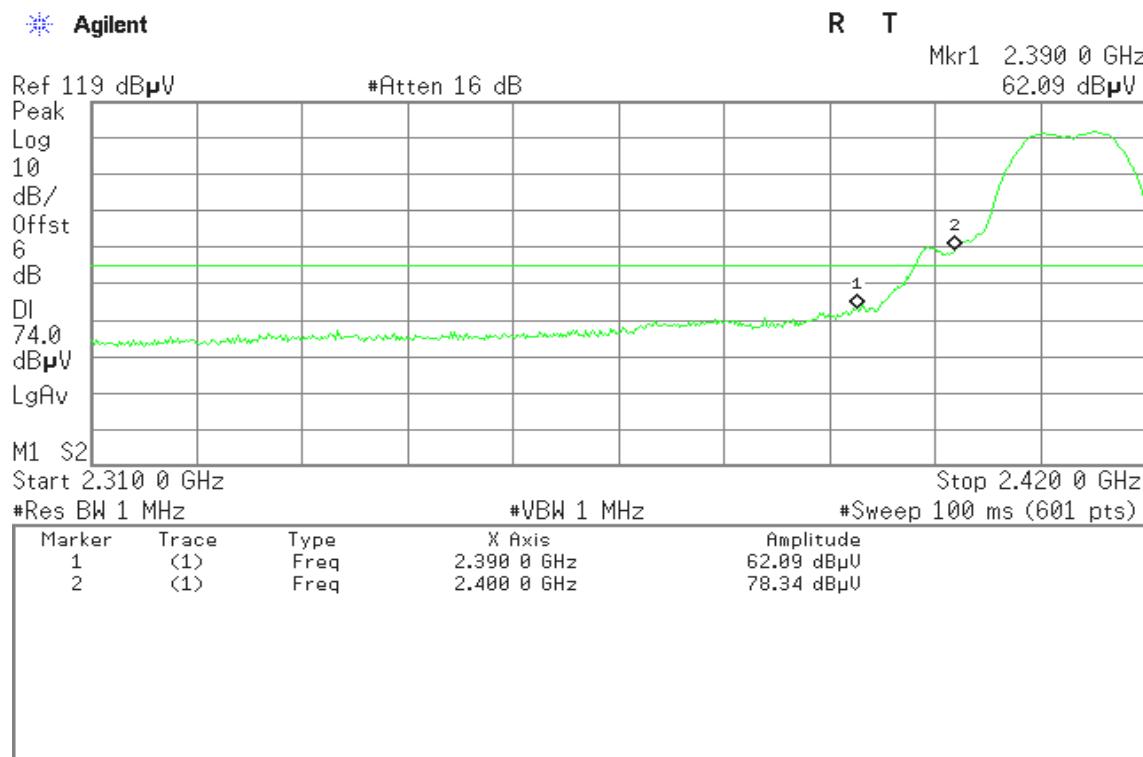
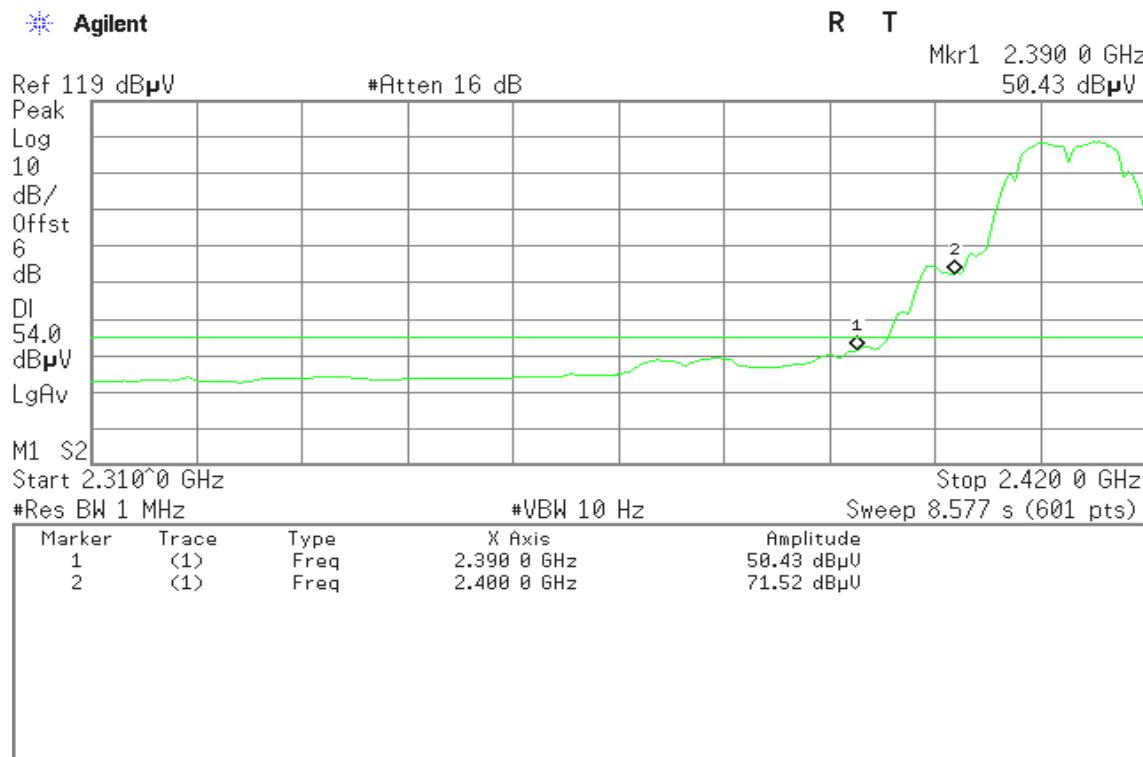
Detector mode: Peak**Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

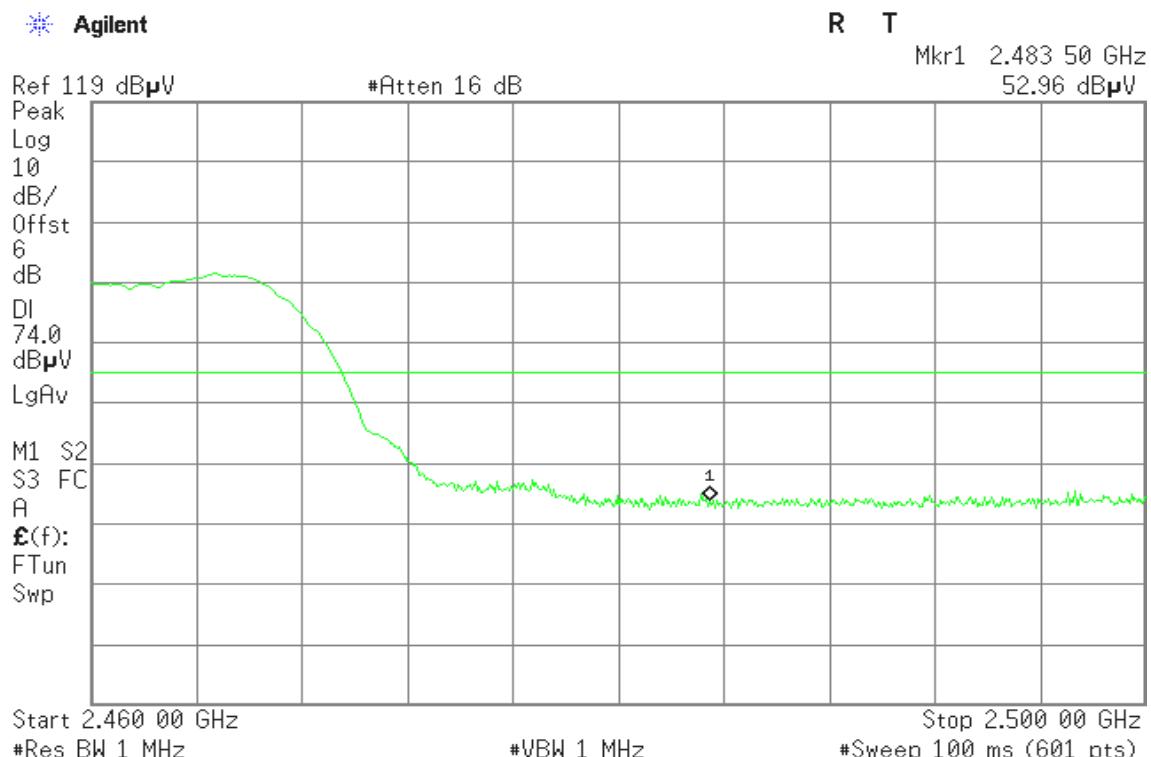
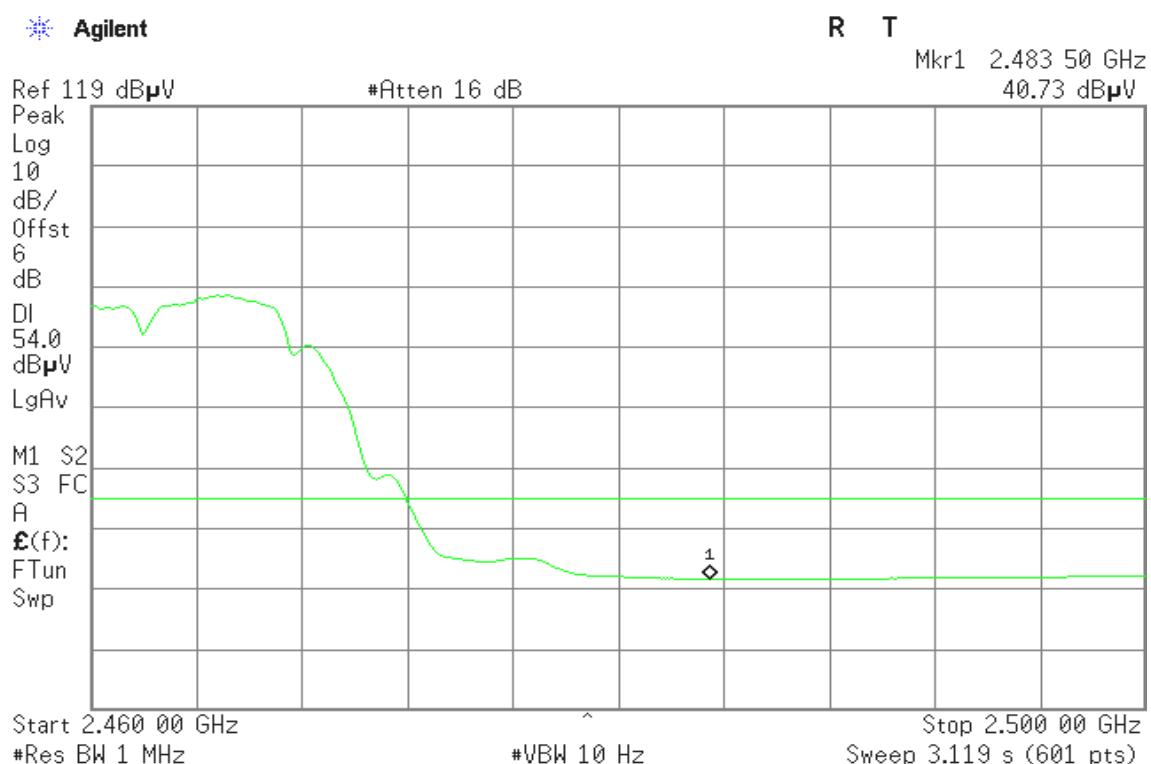
Band Edges (IEEE 802.11b mode / CH High)**Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

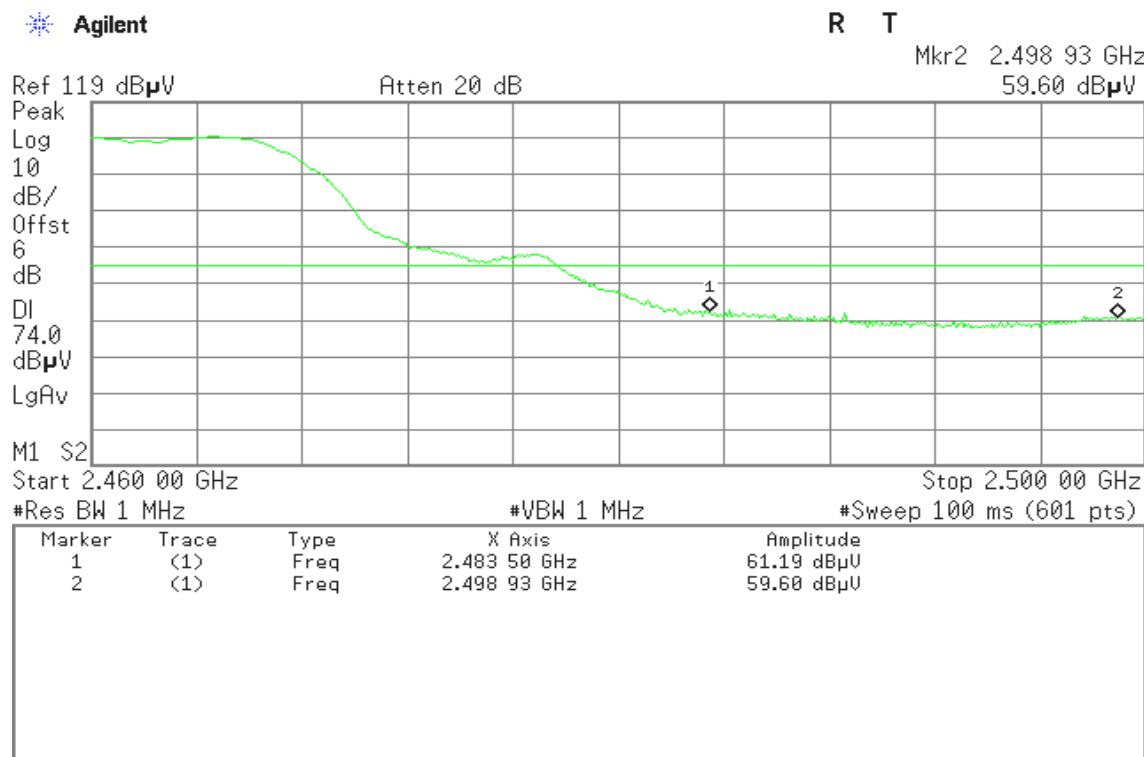
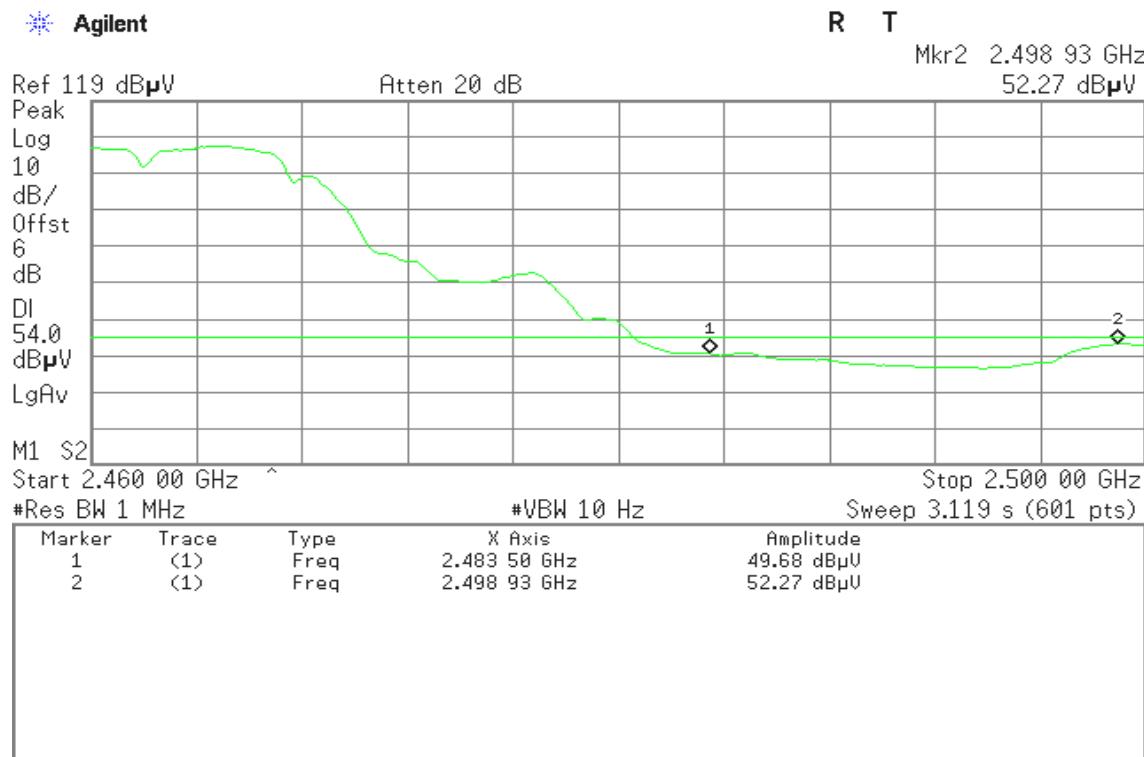
Detector mode: Peak
Polarity: Horizontal

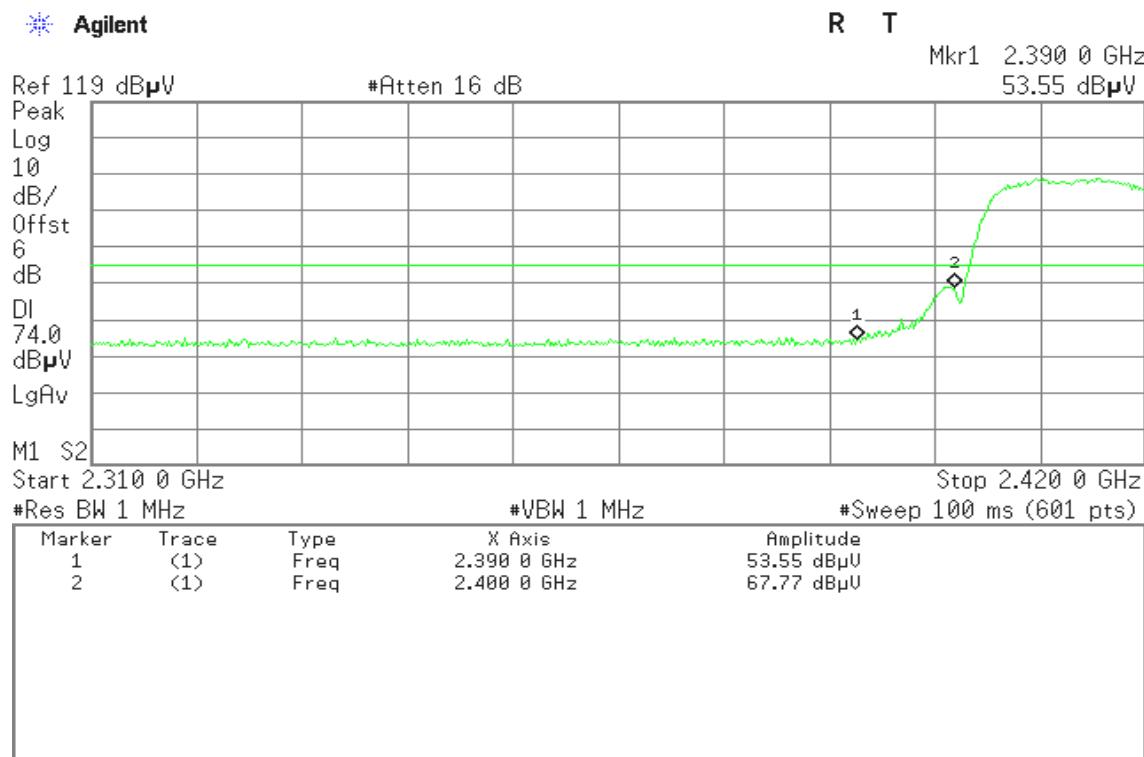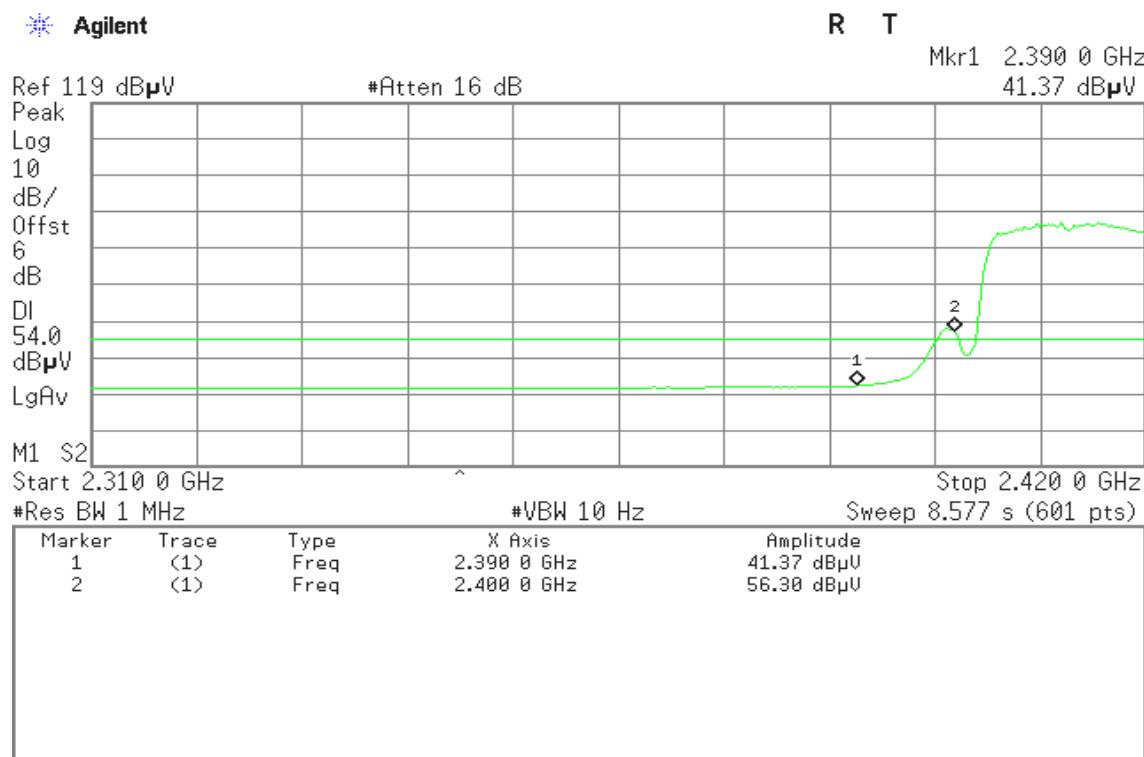Detector mode: Average
Polarity: Horizontal

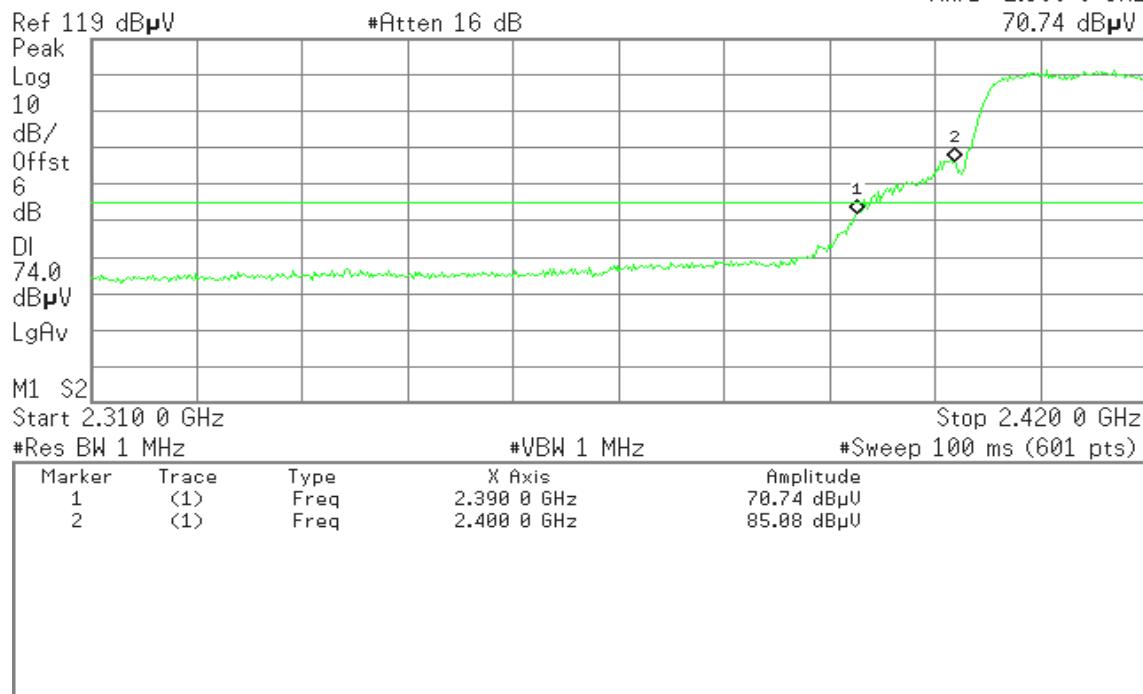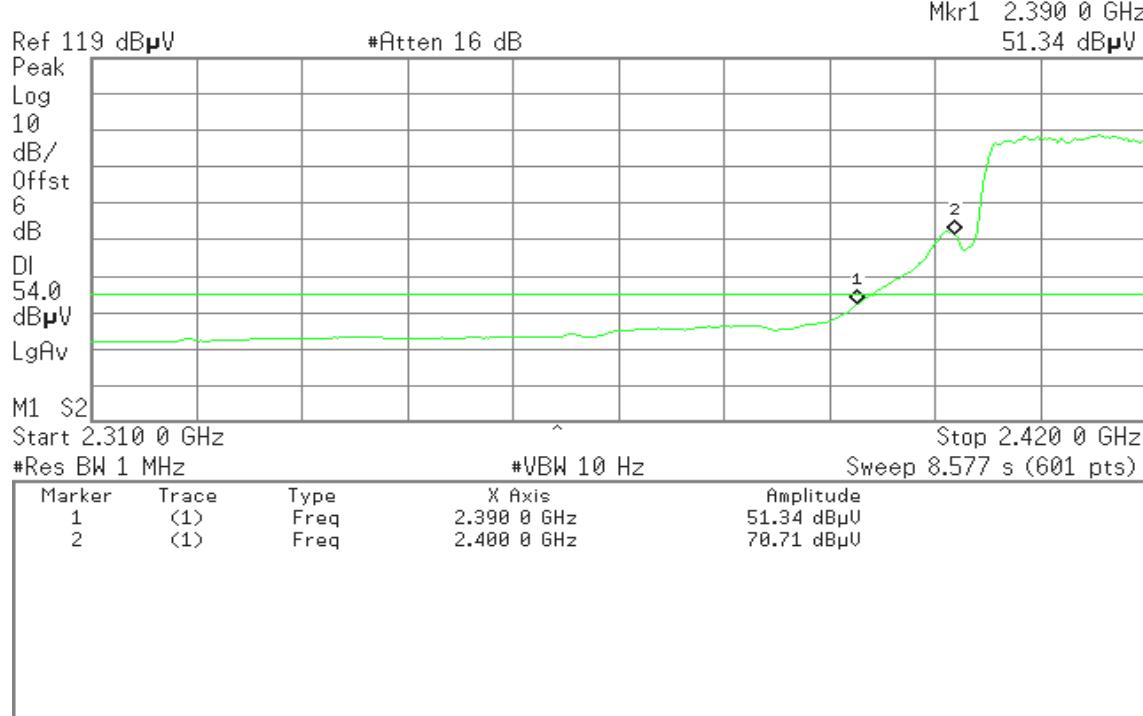
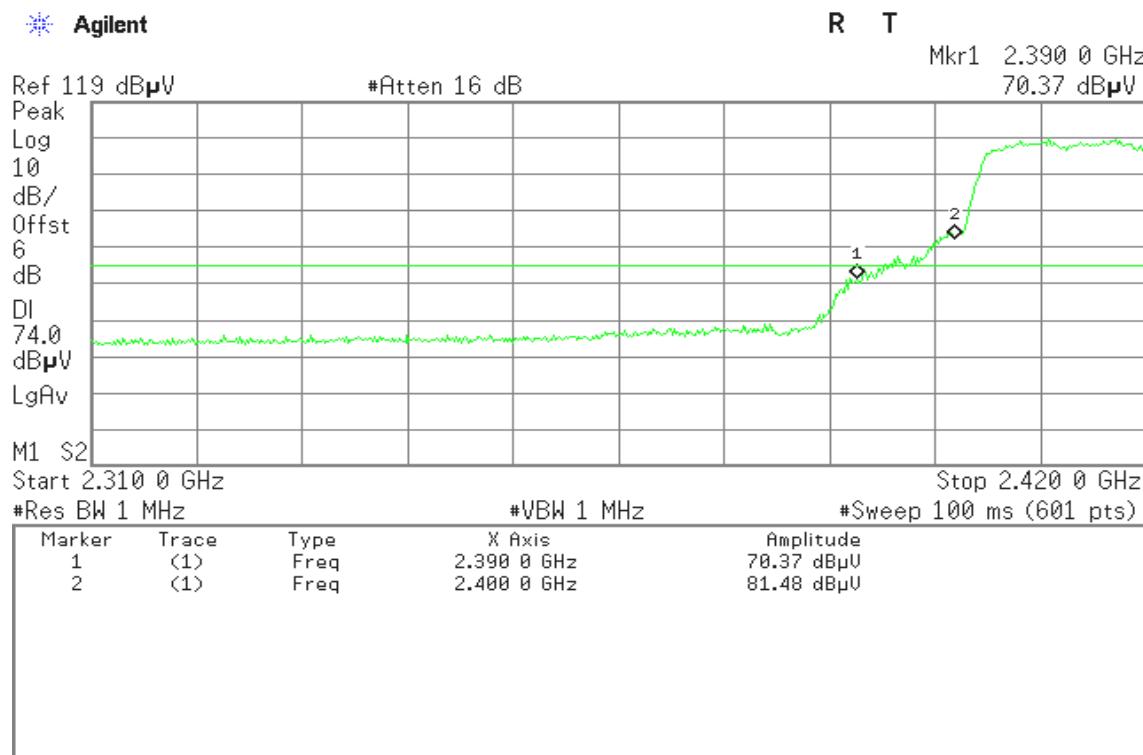
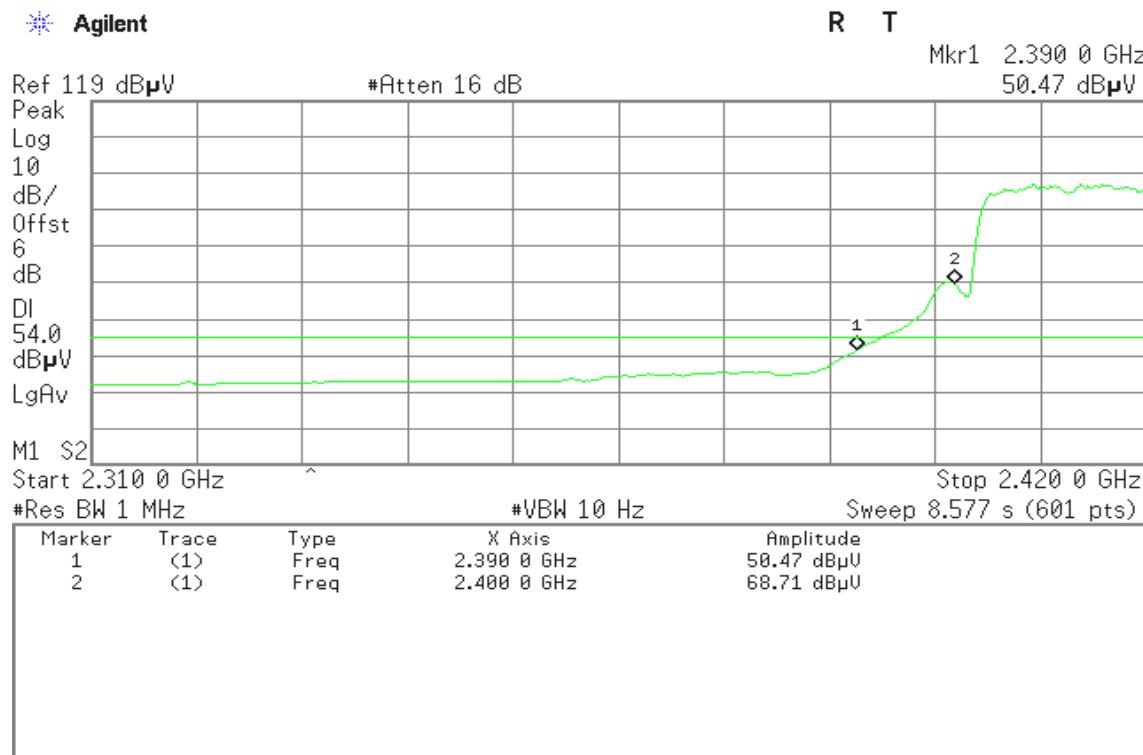
Band Edges (IEEE 802.11g mode / CH Low)**Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

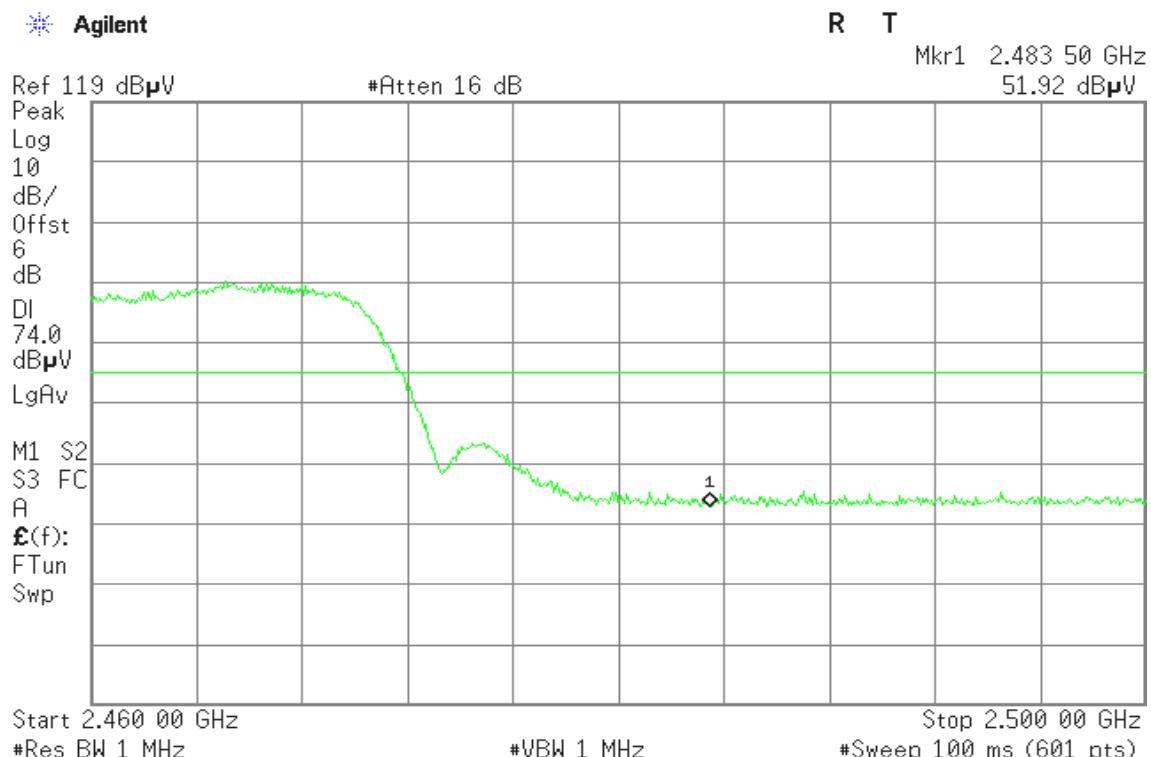
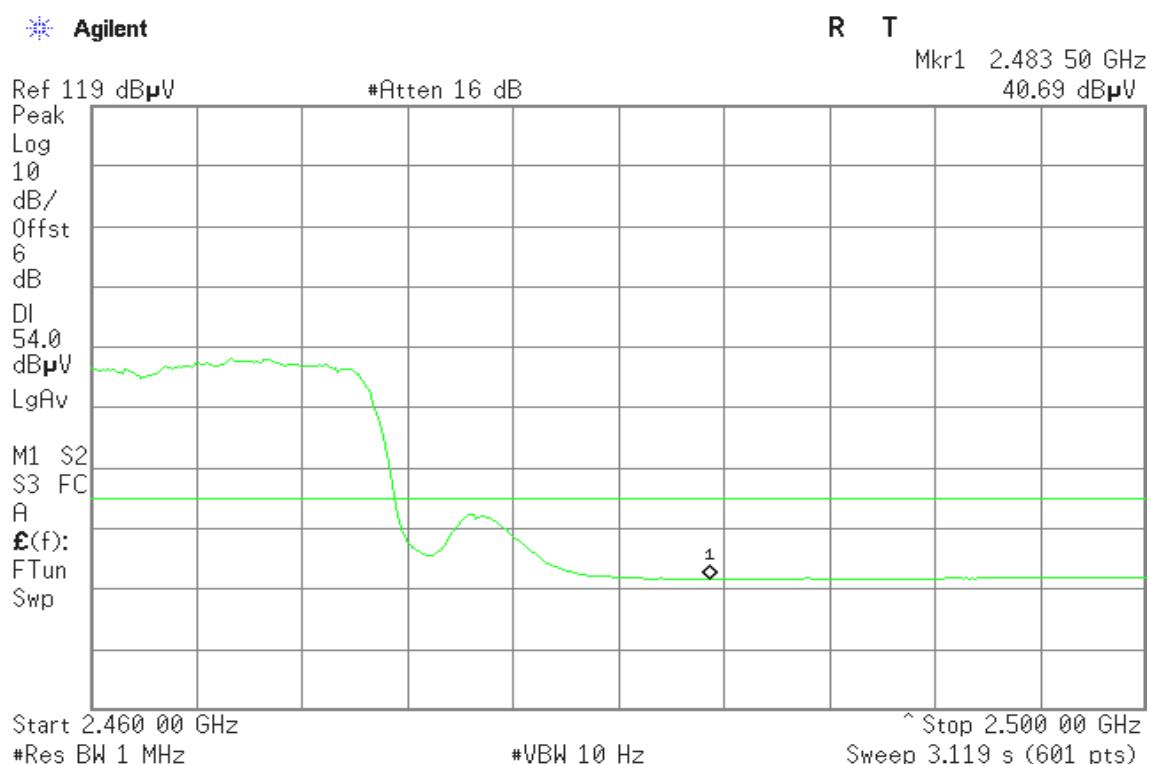
Detector mode: Peak**Polarity: Horizontal** Agilent**Detector mode: Average****Polarity: Horizontal** Agilent

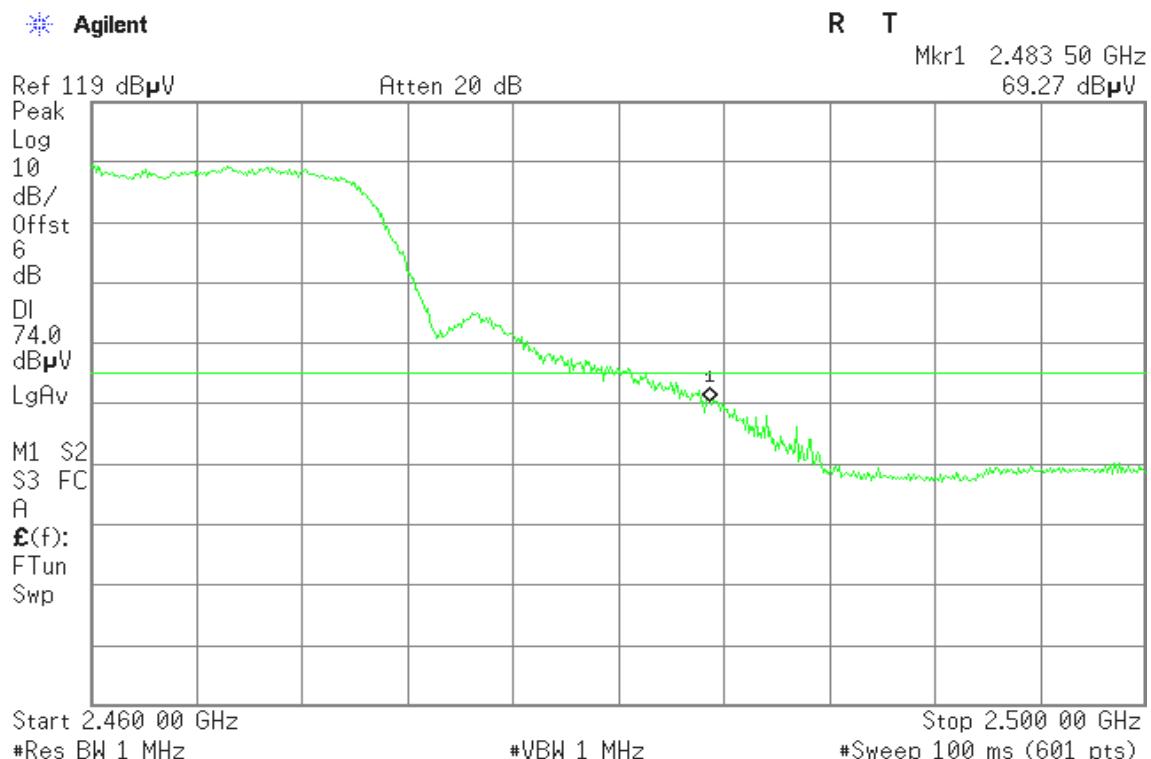
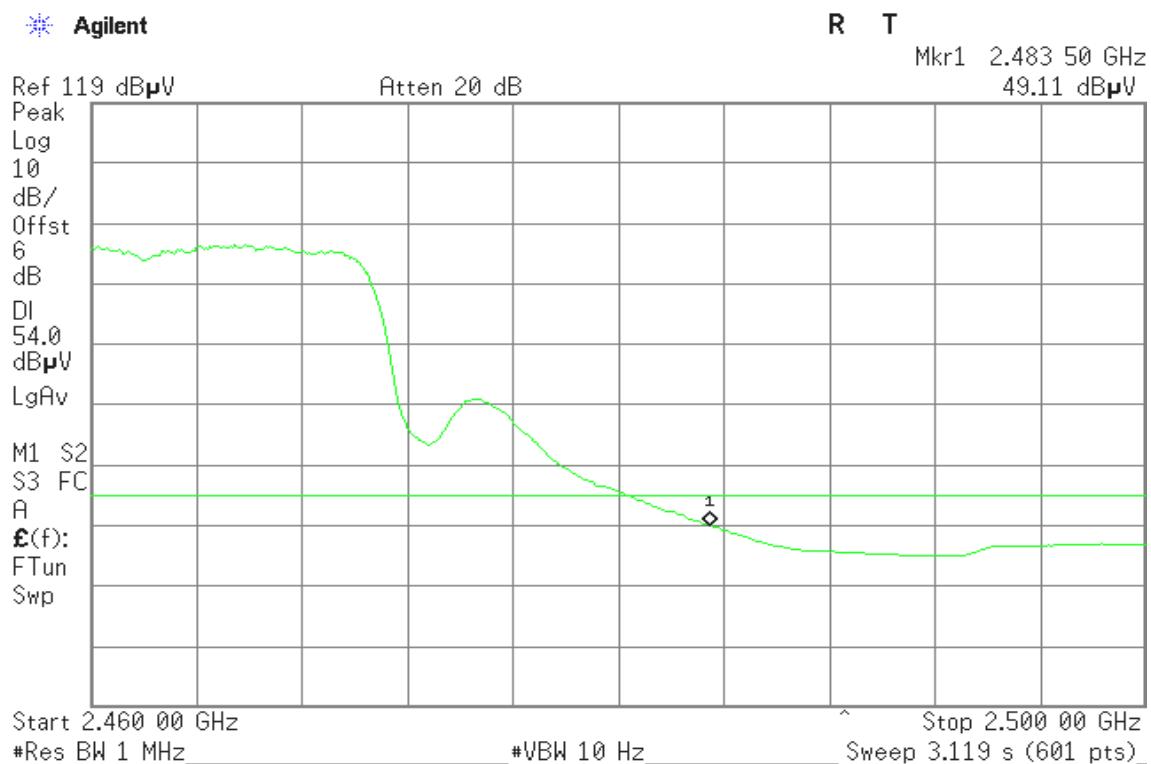
Band Edges (IEEE 802.11g mode / CH High)**Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

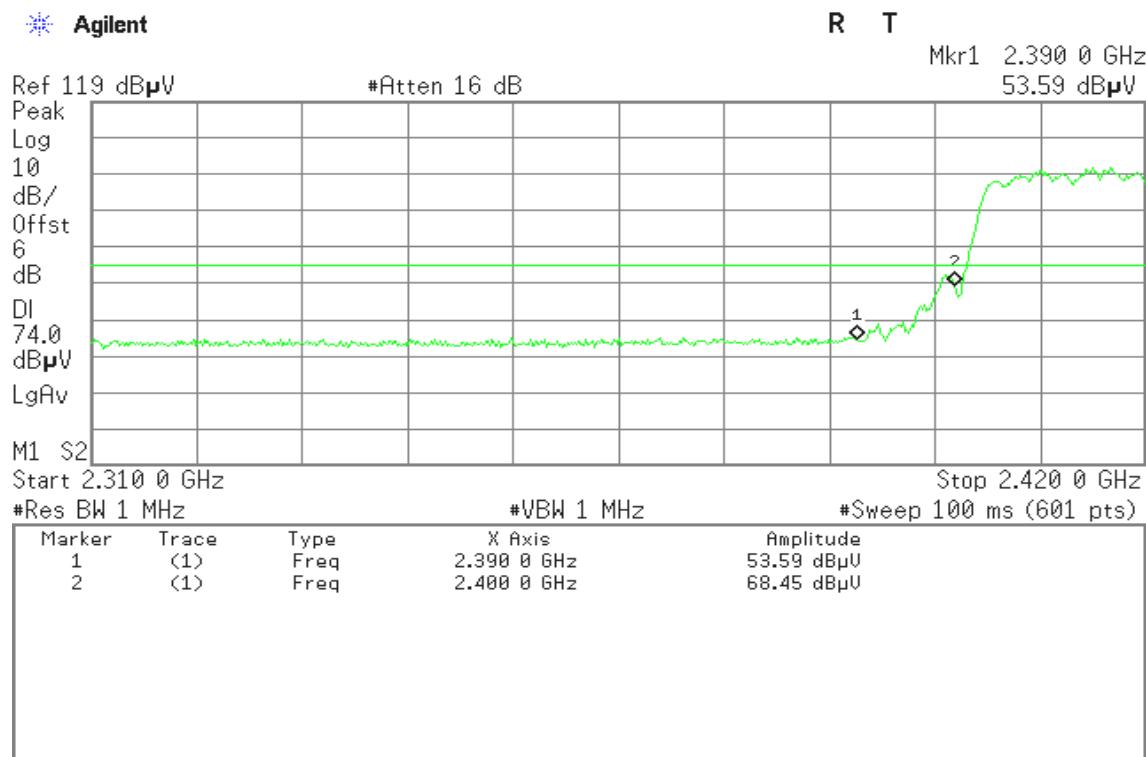
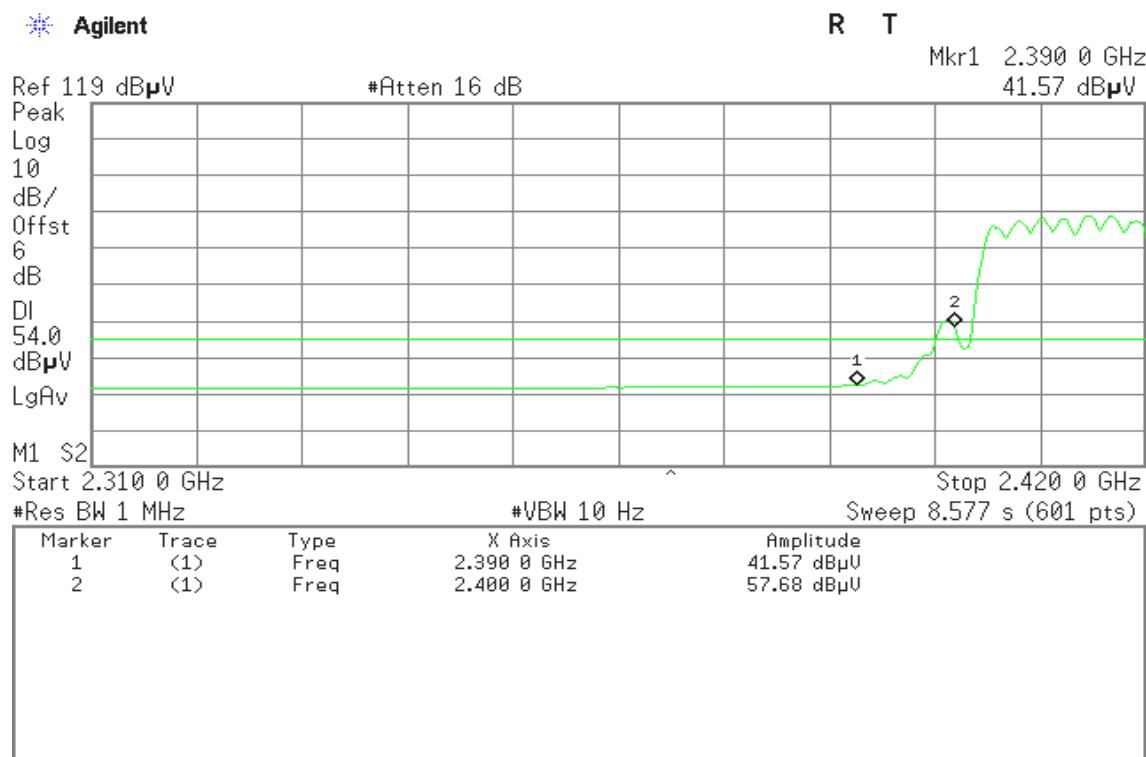
Detector mode: Peak**Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**



Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)**Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**



Detector mode: Peak**Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

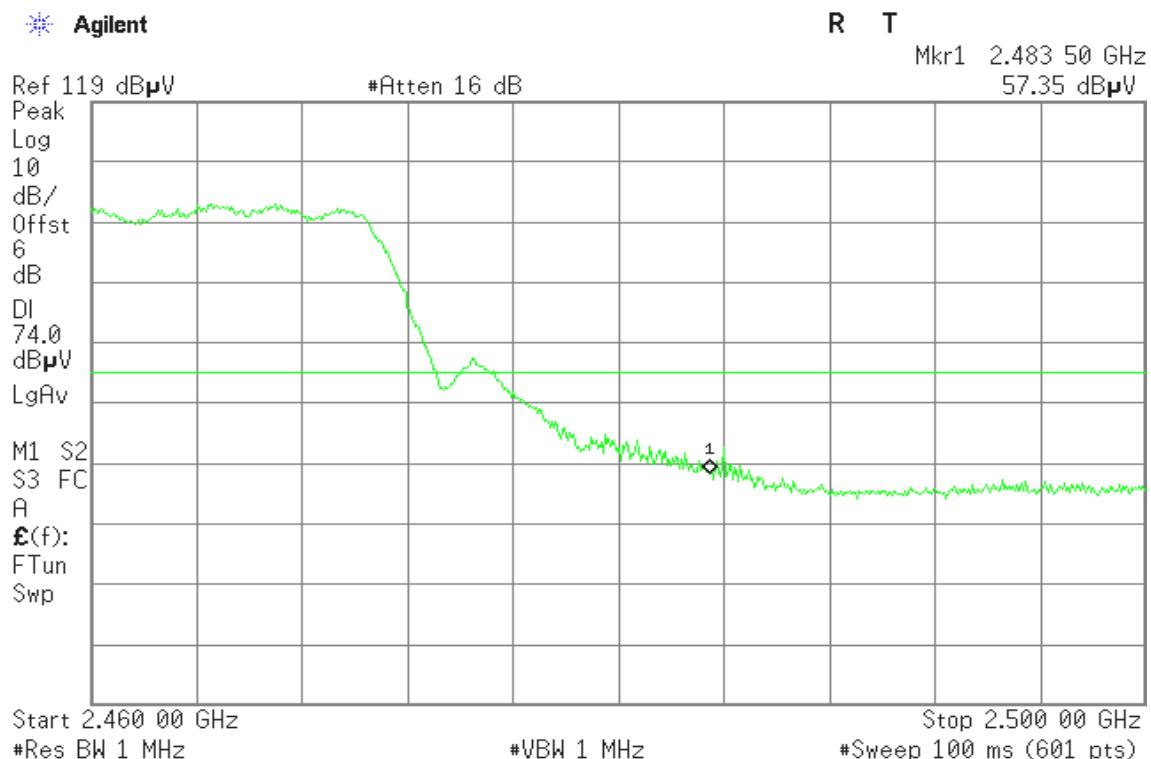
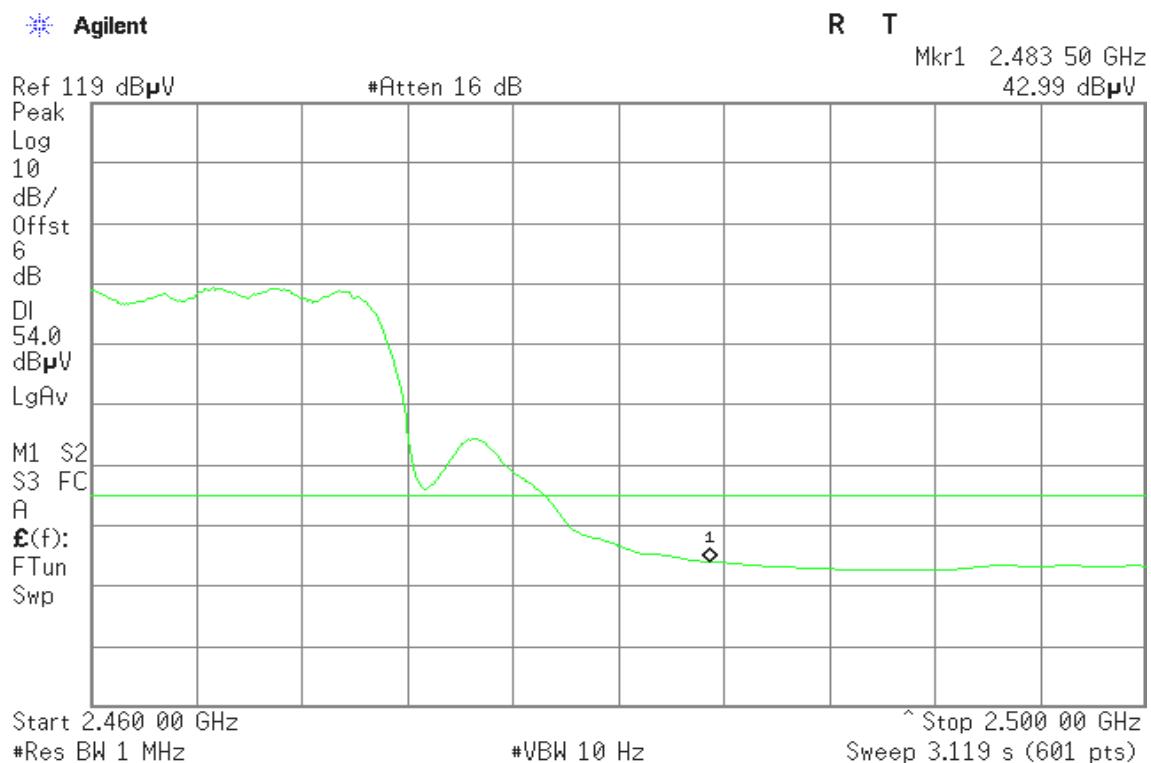
Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)**Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**

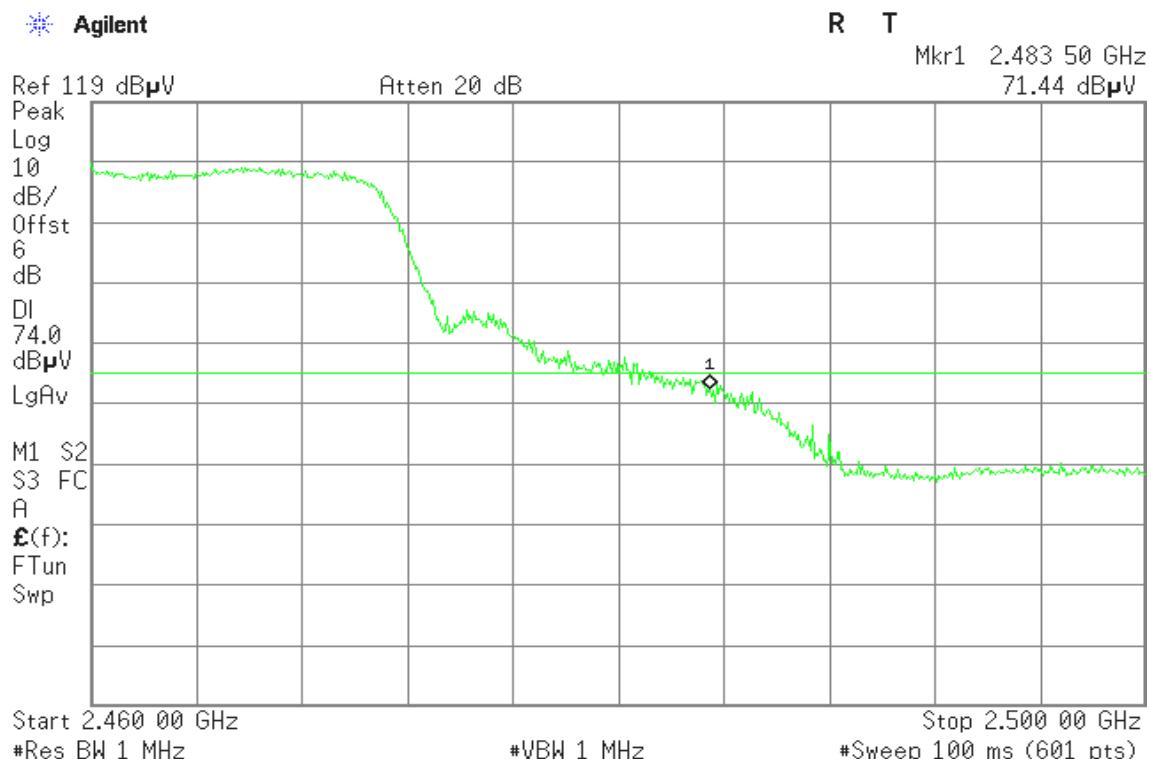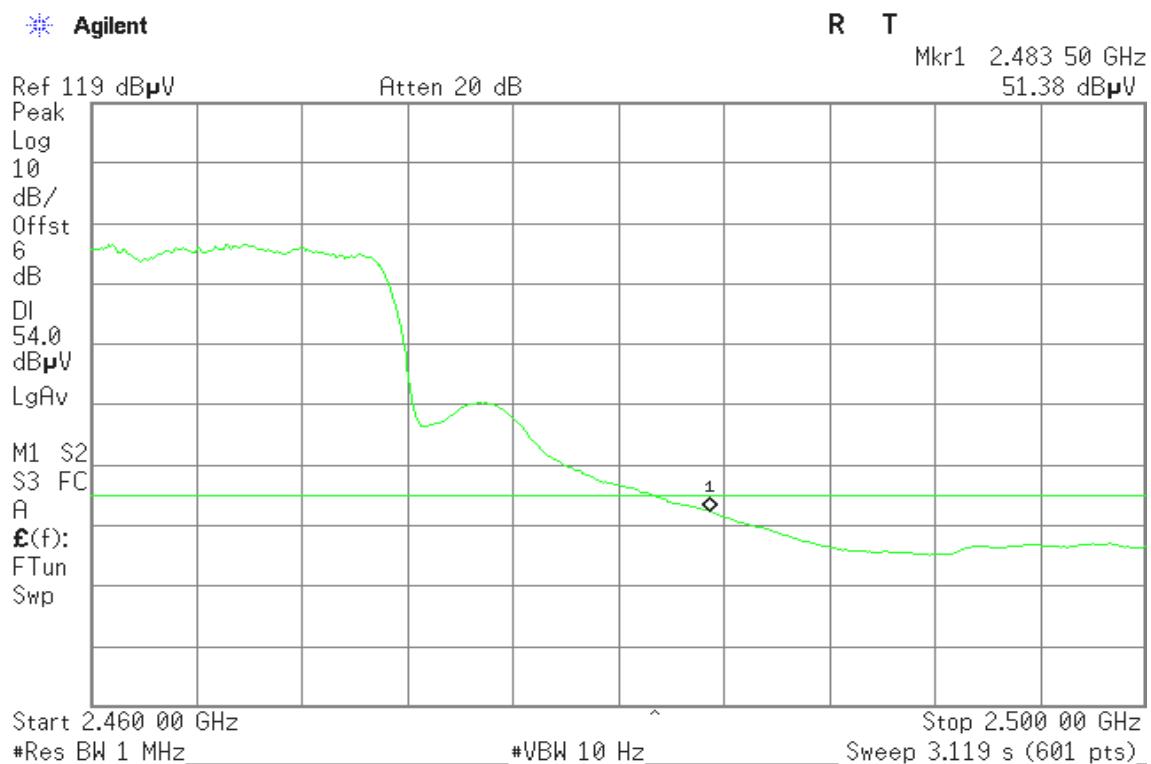Detector mode: Peak**Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

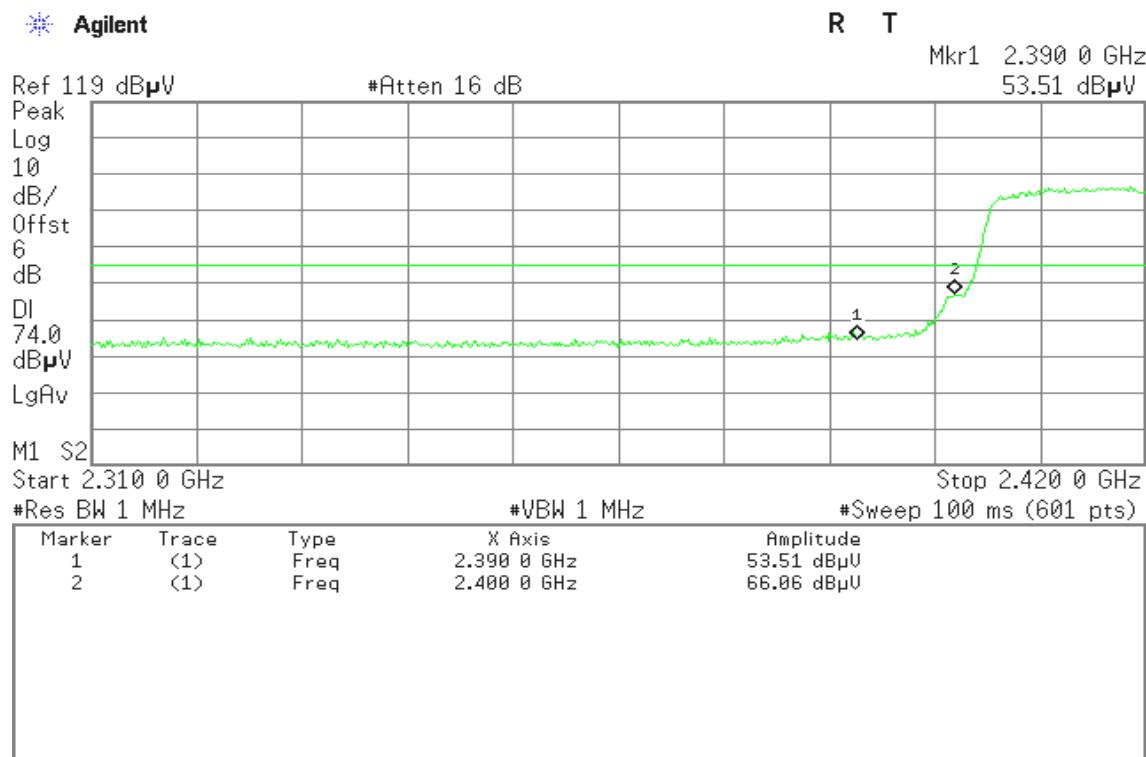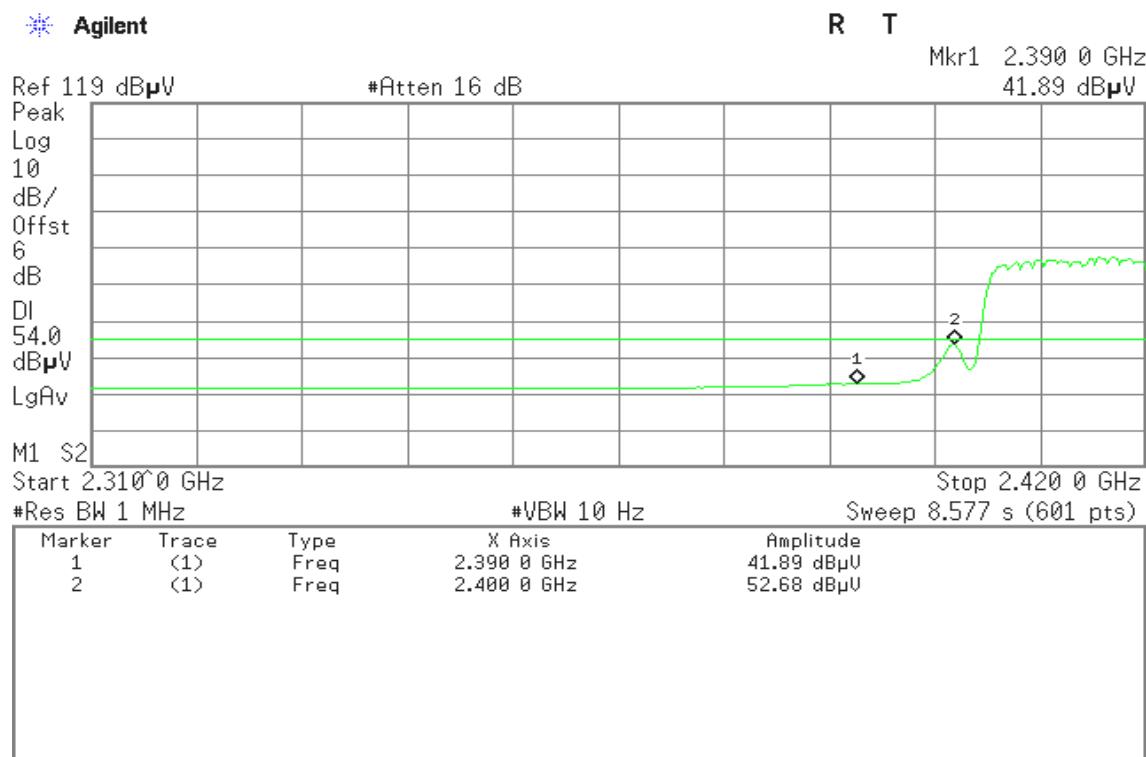Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)
Detector mode: Peak
Polarity: Vertical

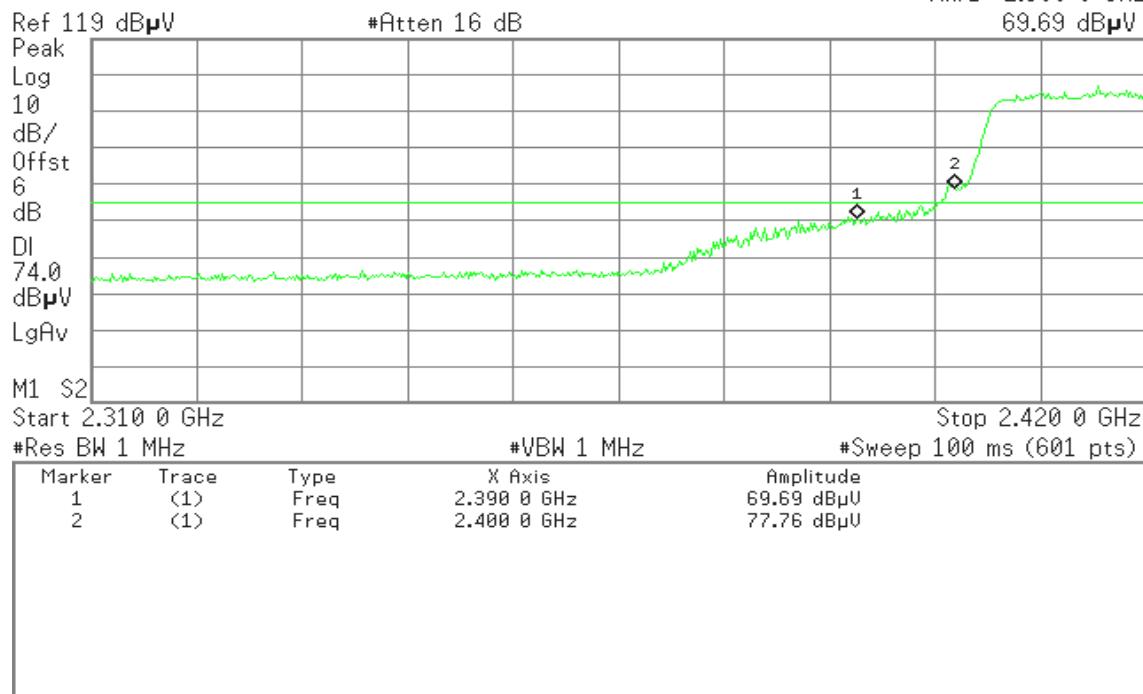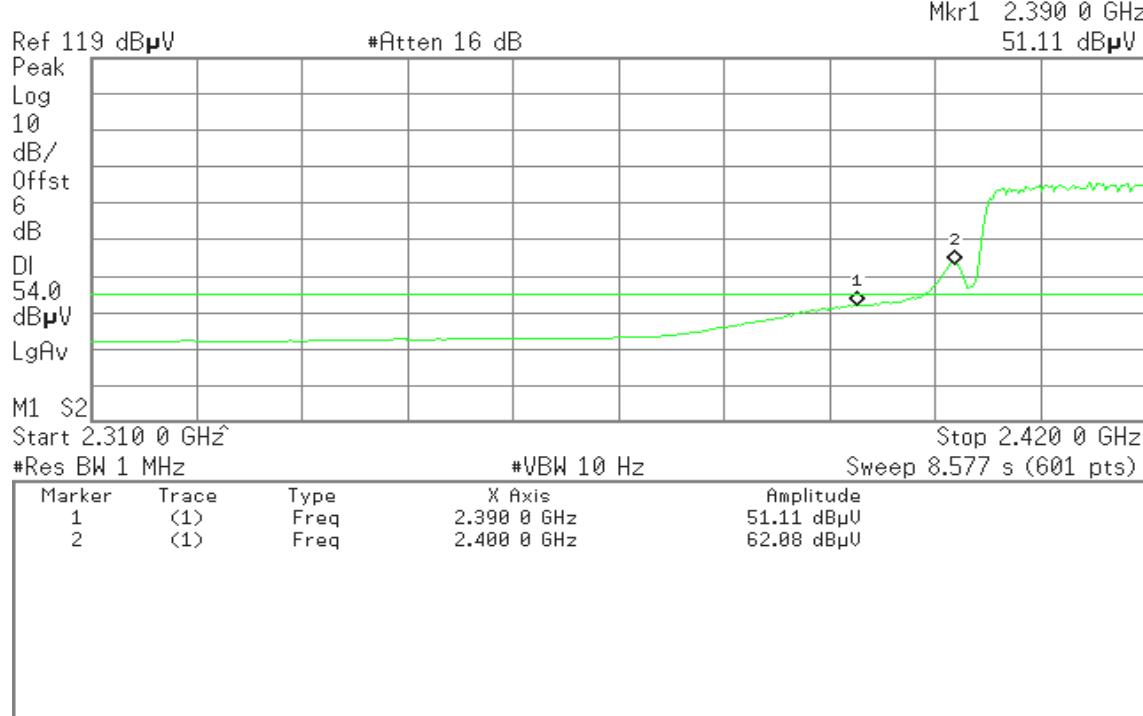Detector mode: Average
Polarity: Vertical

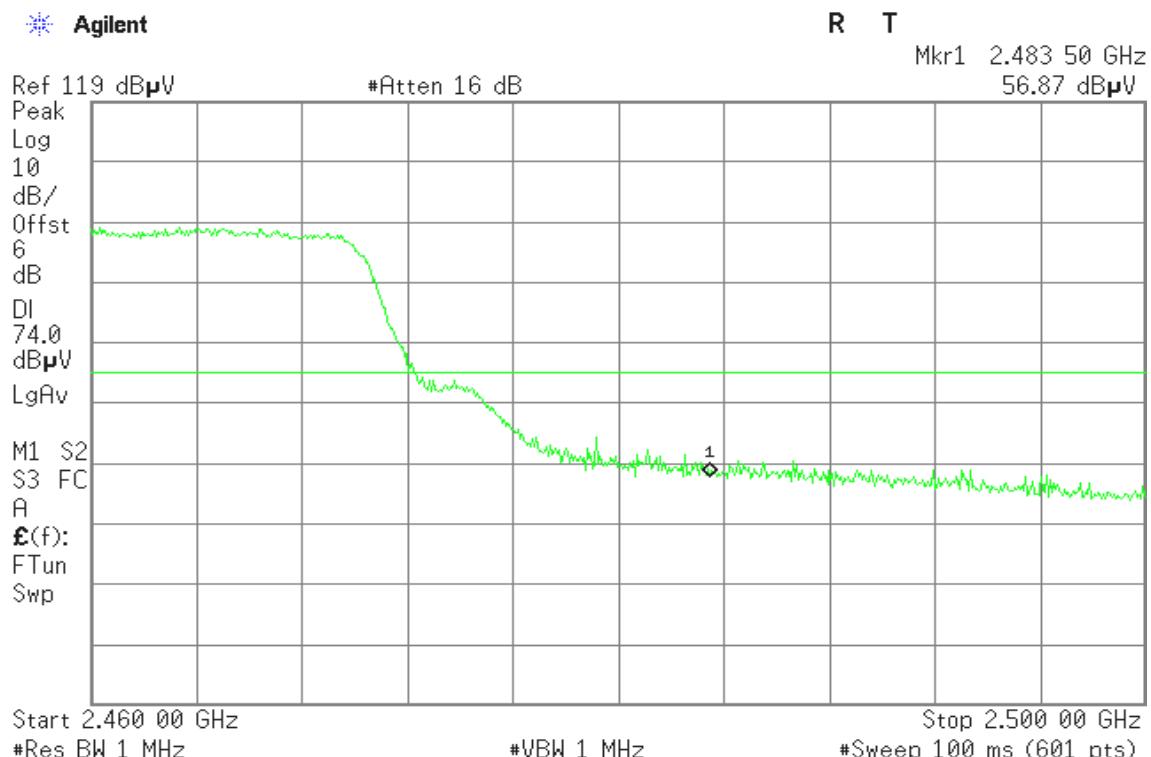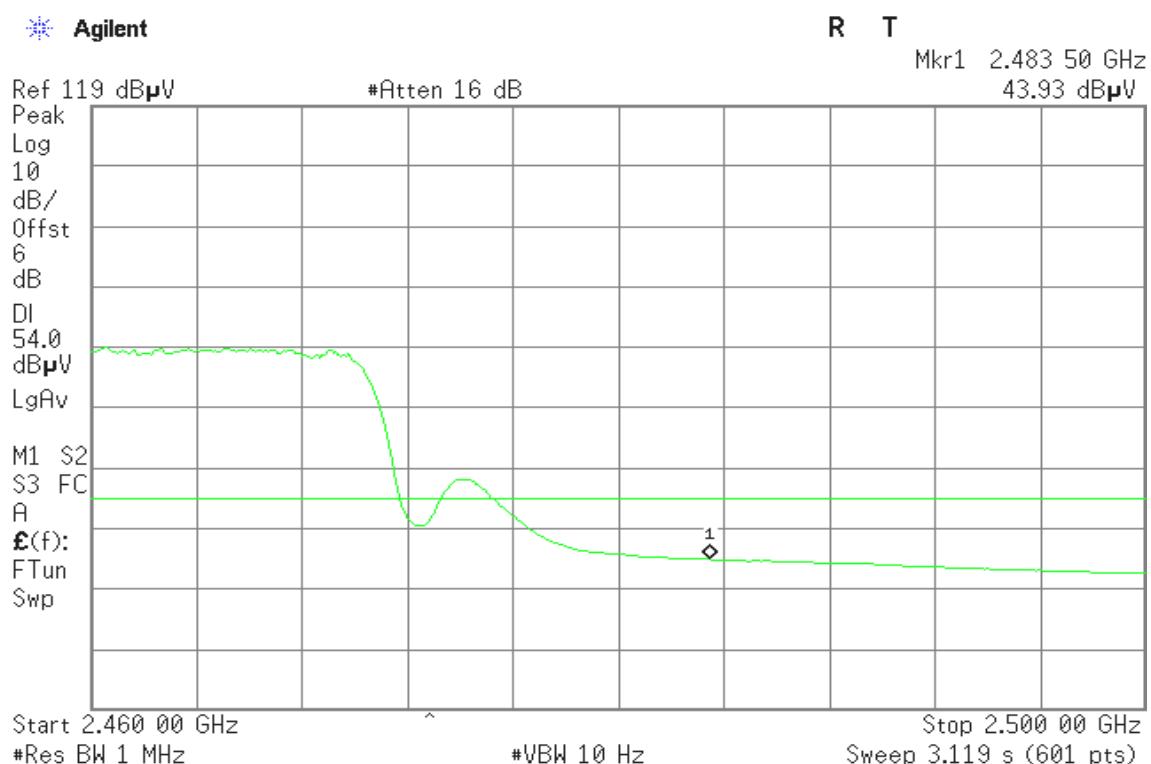
Detector mode: Peak**Polarity: Horizontal** Agilent**Detector mode: Average****Polarity: Horizontal** Agilent

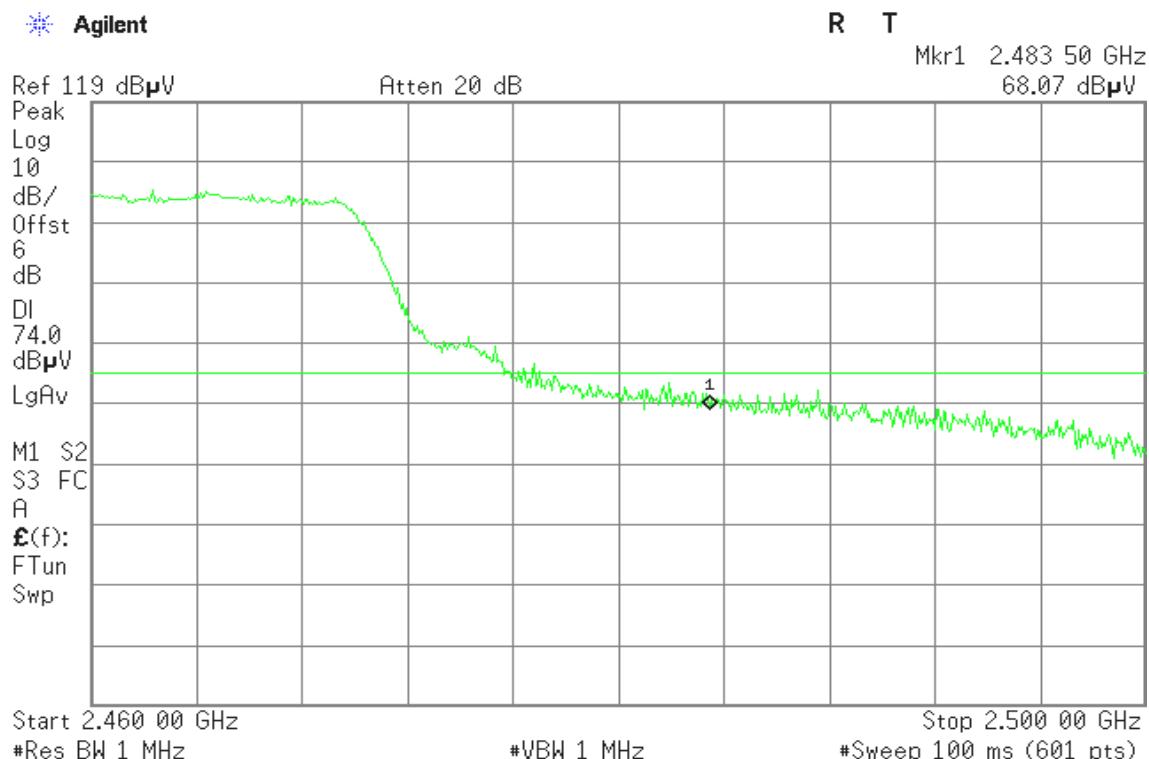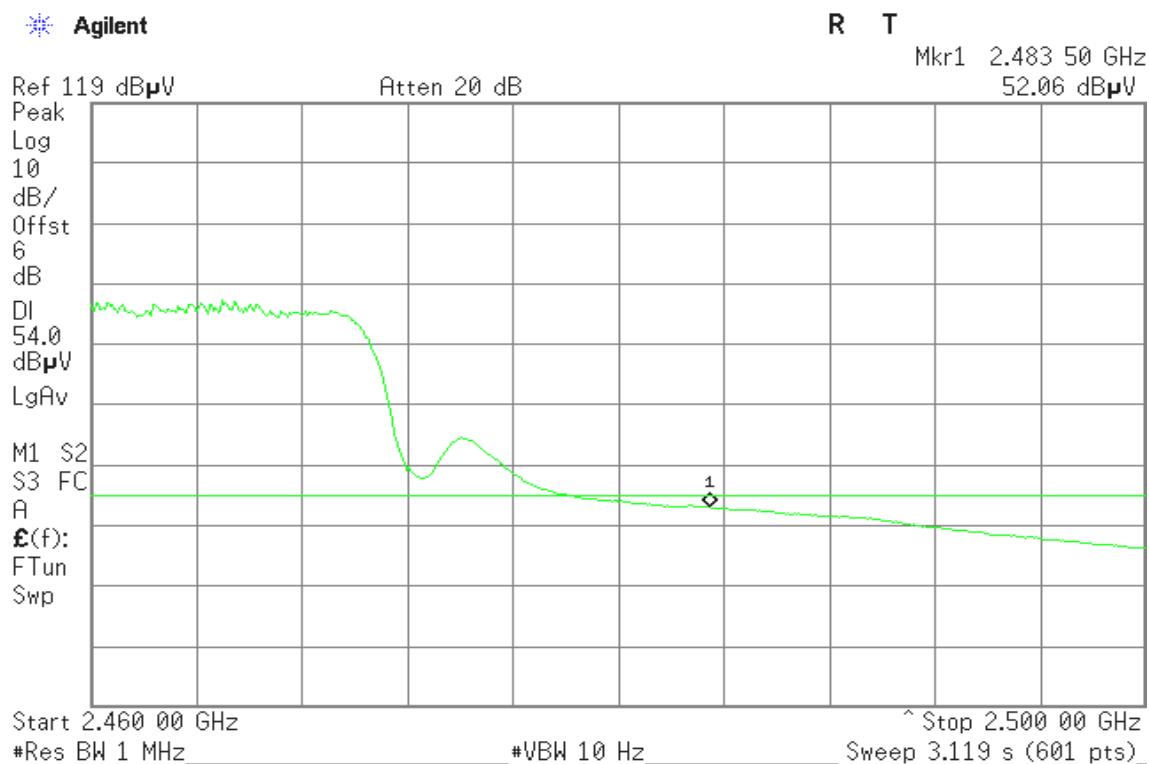Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)**Detector mode: Peak****Polarity: Vertical****Detector mode: Average****Polarity: Vertical**


Detector mode: Peak**Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**

8.6 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e) & RSS-210 §A8.2, for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f) & RSS-210 §A8.3, the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration

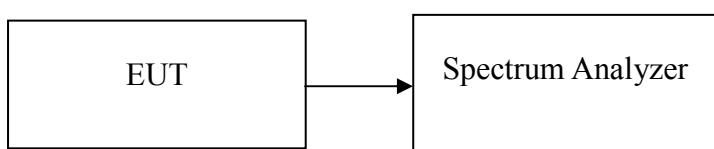

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted



Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-8.15	8.00	PASS
Mid	2437	-8.98		PASS
High	2462	-10.24		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-14.51	8.00	PASS
Mid	2437	-14.72		PASS
High	2462	-9.69		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-16.66	-17.58	-14.09	8.00	PASS
Mid	2437	-15.42	-17.42	-13.30		PASS
High	2462	-18.14	-18.44	-15.28		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-19.00	-22.72	-17.46	8.00	PASS
Mid	2437	-16.65	-20.81	-15.24		PASS
High	2452	-18.07	-23.05	-16.87		PASS

Remark: Total PPSD (dBm) = $10 * \log(10^{(Chain\ 0\ PPSD\ / 10)} + 10^{(Chain\ 1\ PPSD\ / 10)})$

**Test mode: draft 802.11n Standard-20 MHz Channel mode with combiner**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-14.38	8.00	PASS
Mid	2437	-13.37		PASS
High	2462	-16.71		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode with combiner


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-18.64	8.00	PASS
Mid	2437	-7.61		PASS
High	2452	-20.73		PASS

Remark: Total PPSD (dBm) = $10 * LOG(10^{(Chain 0 PPSD / 10)} + 10^{(Chain 1 PPSD / 10)})$


Test Plot

IEEE 802.11b mode


PPSD (CH Low)

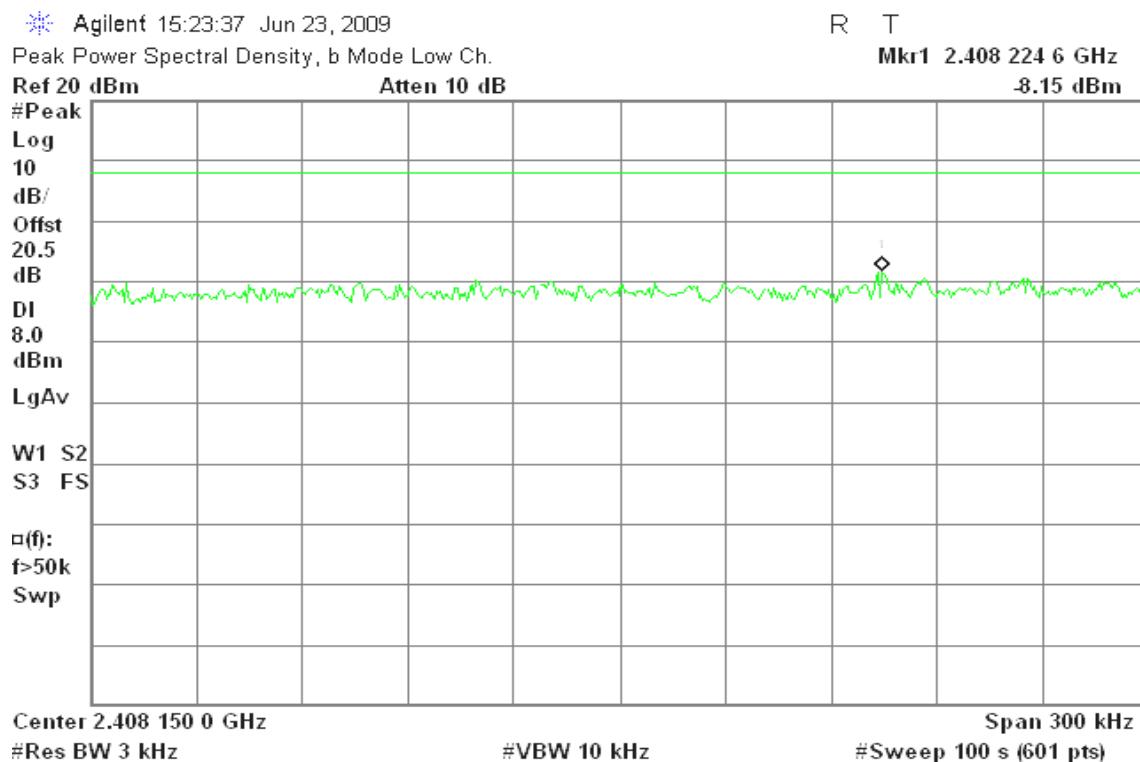

PPSD (CH Mid)

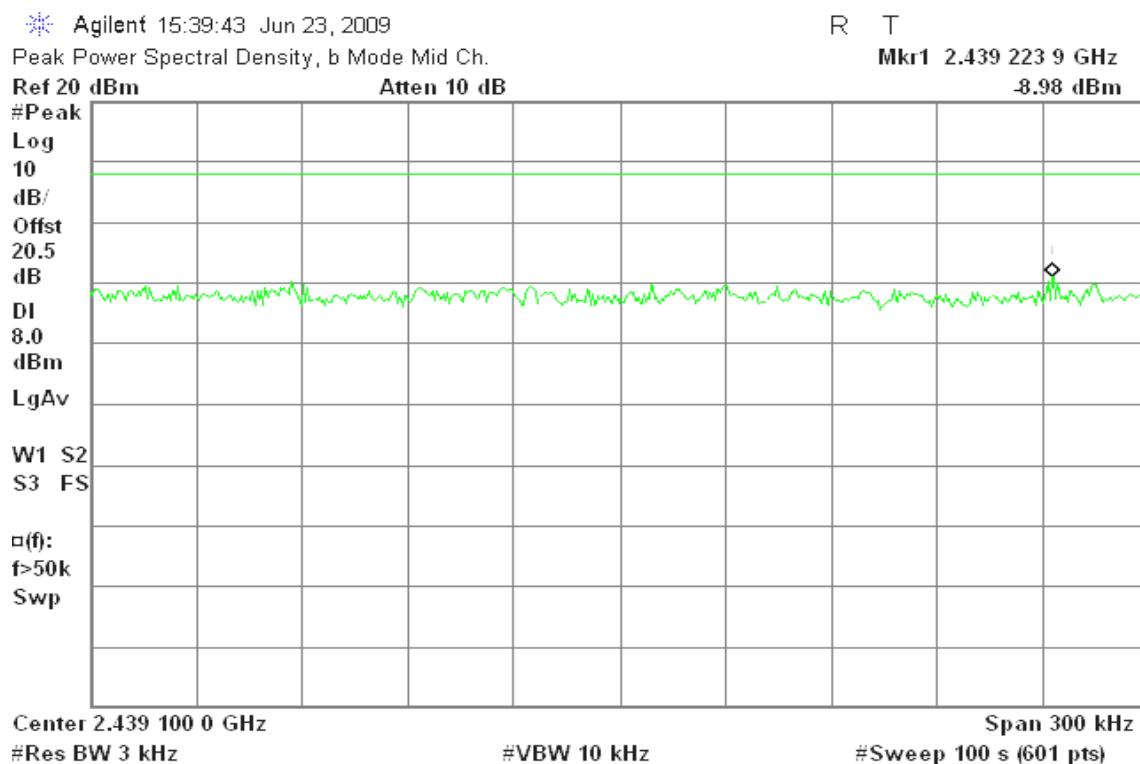




PPSD (CH High)


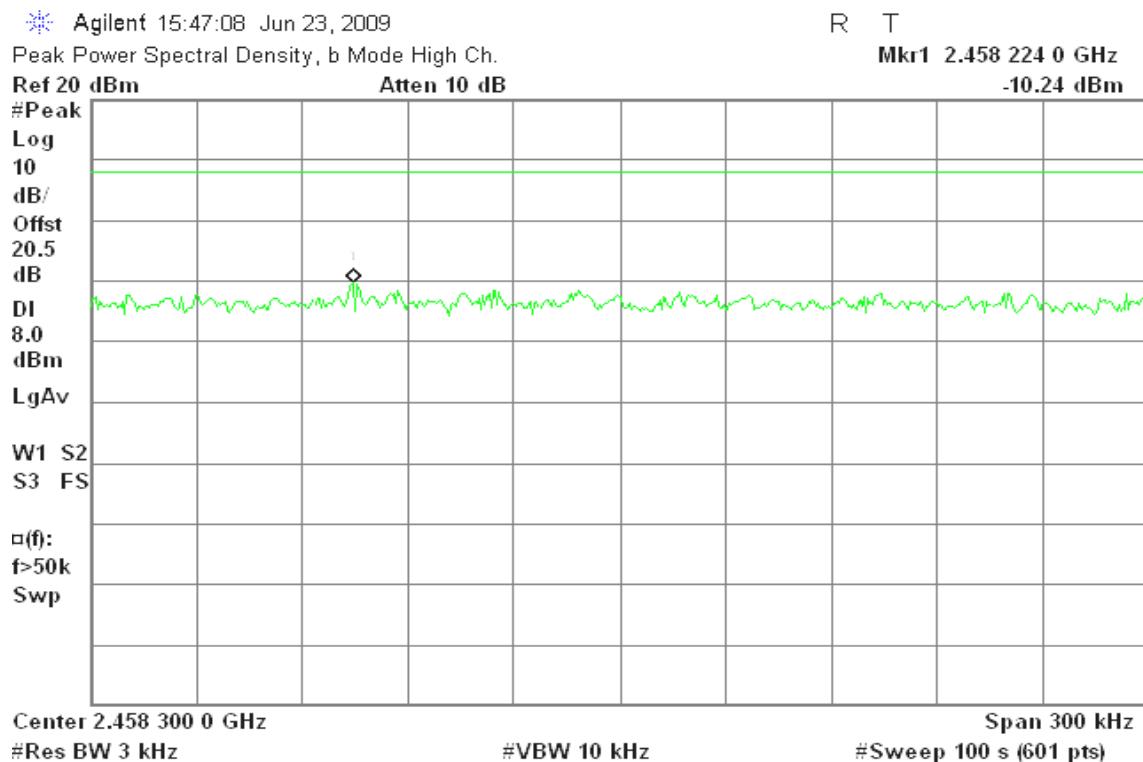


IEEE 802.11g mode


PPSD (CH Low)

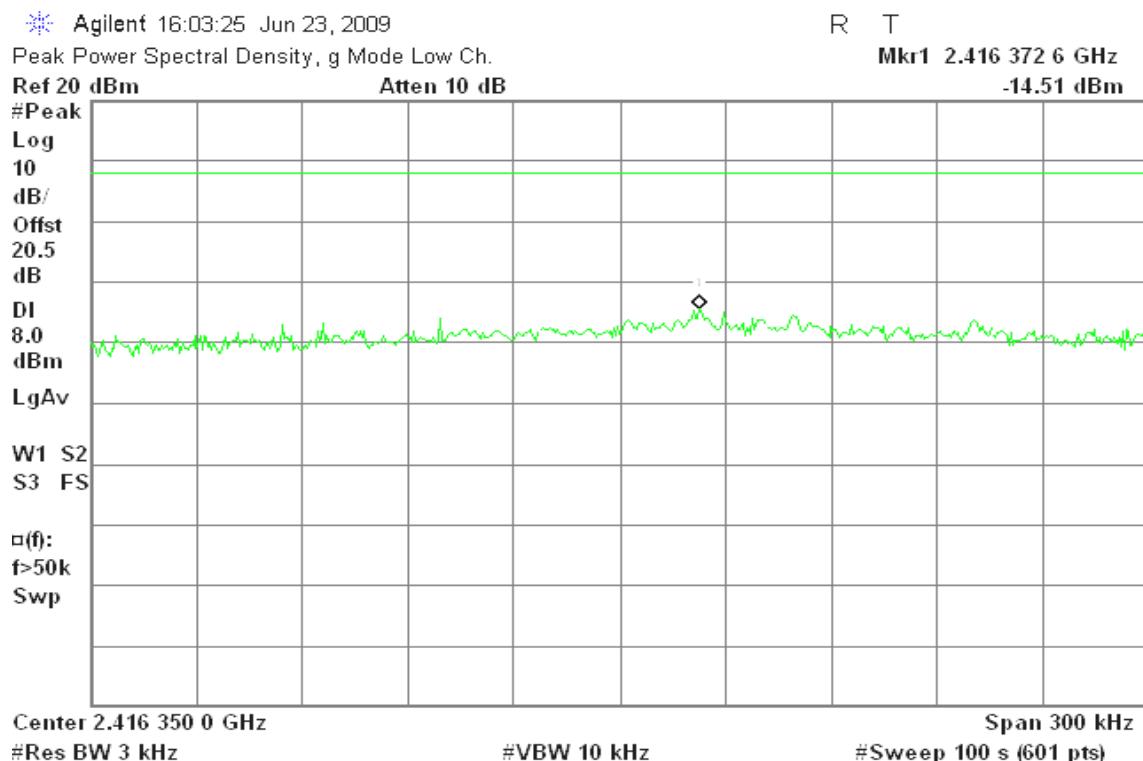

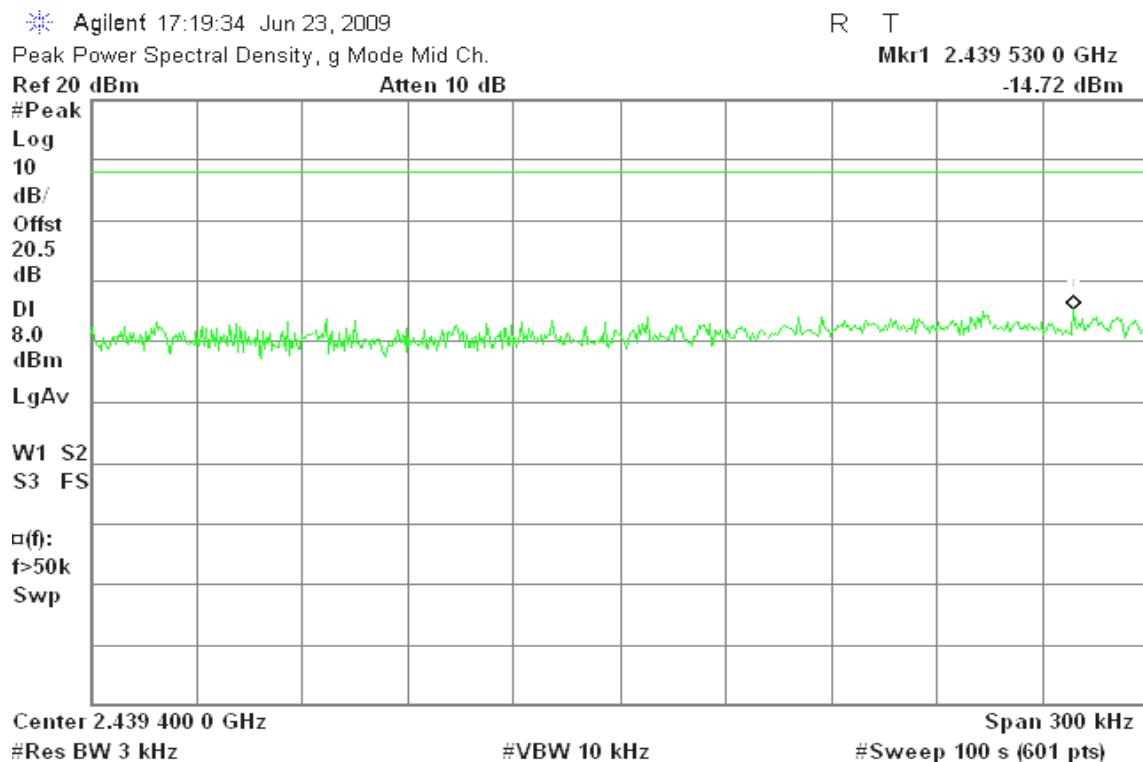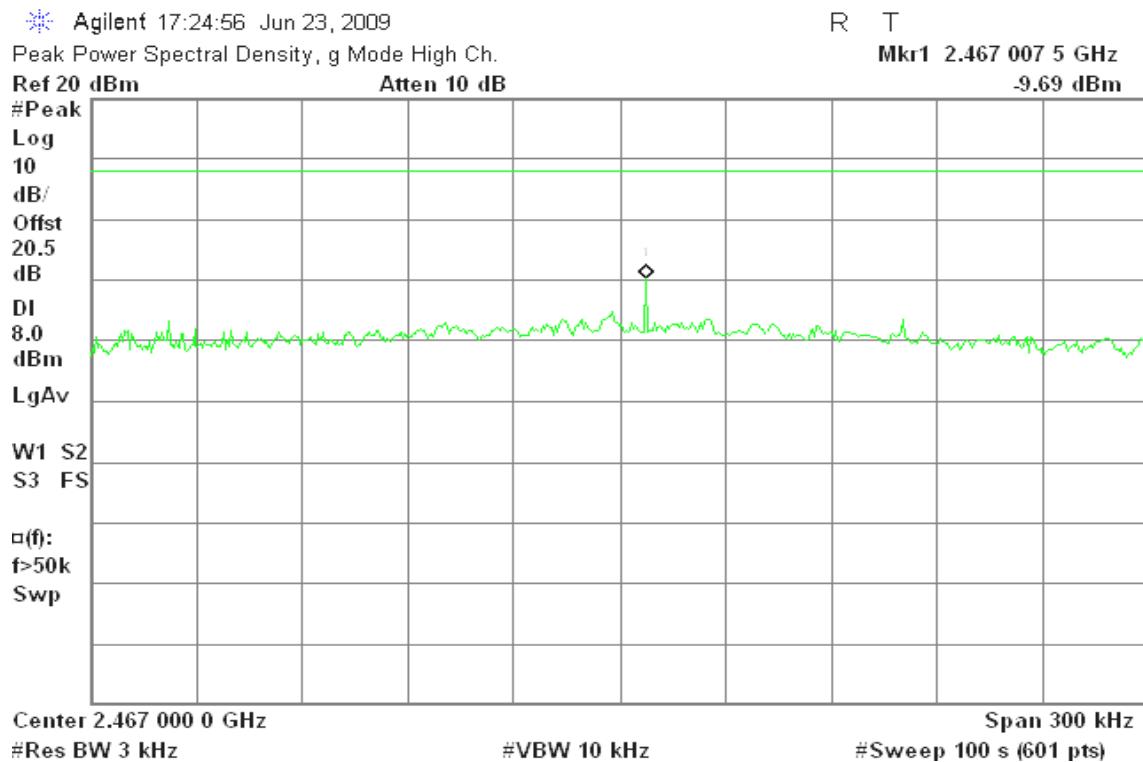PPSD (CH Mid)**PPSD (CH High)**

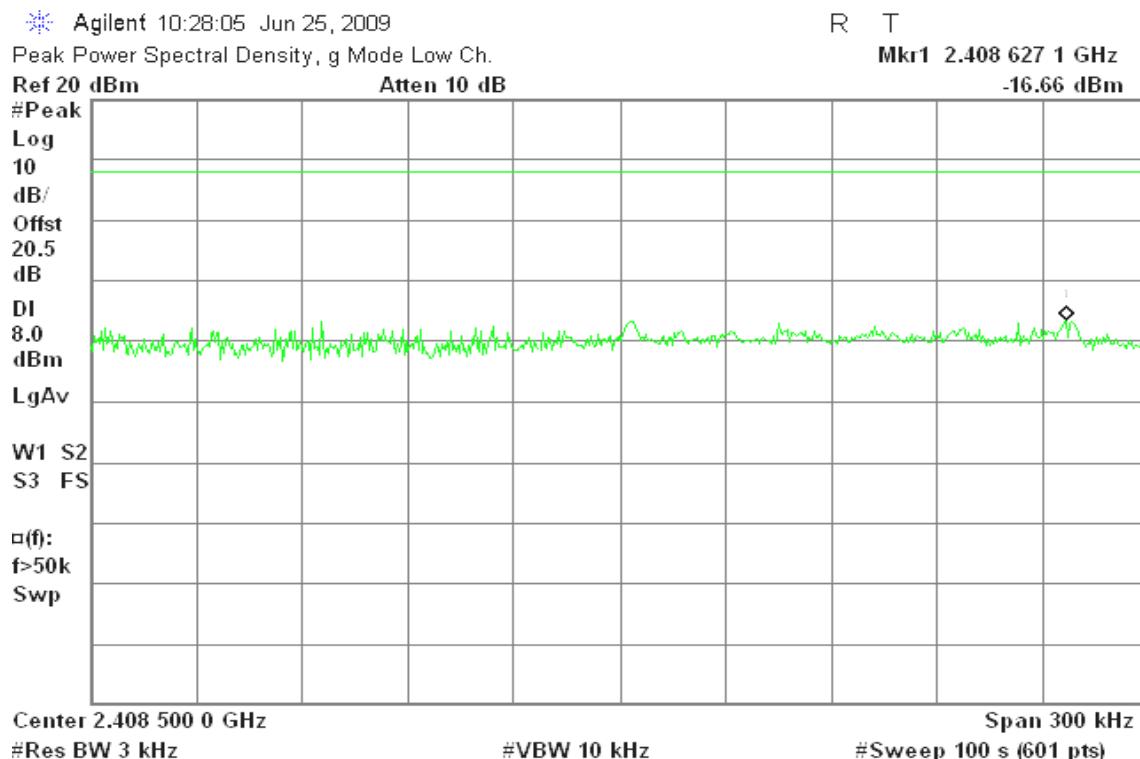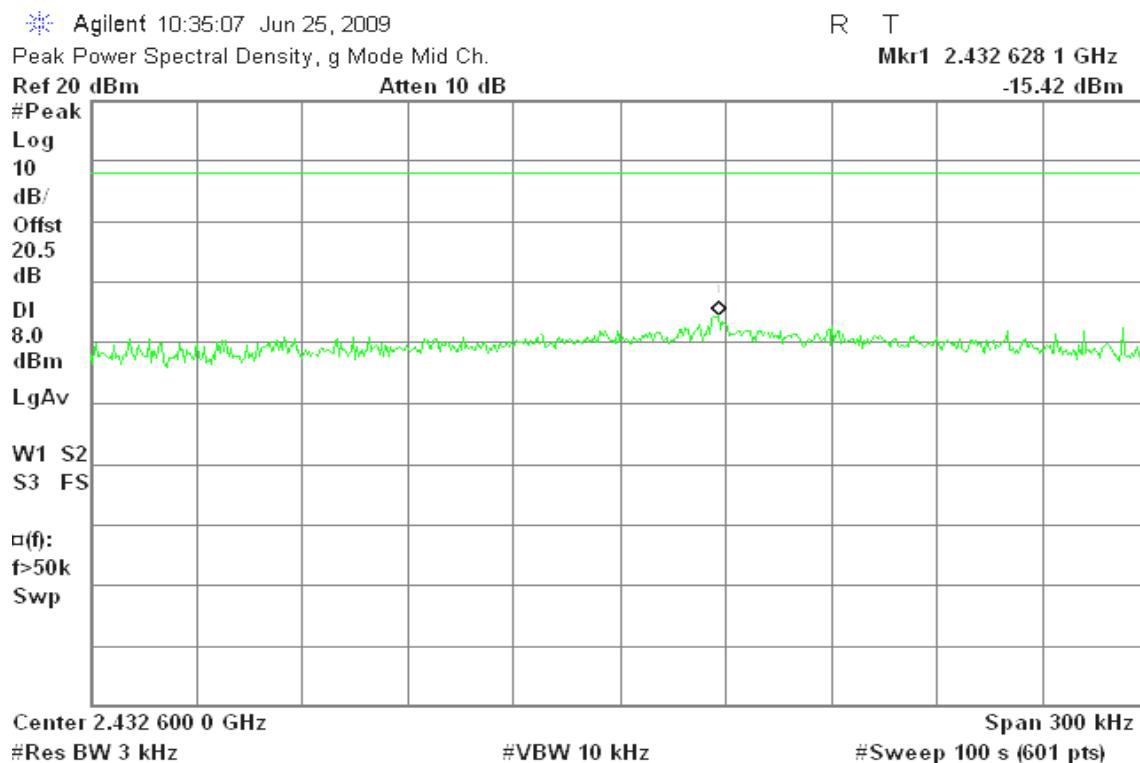
draft 802.11n Standard-20 MHz Channel mode / Chain 0**PPSD (CH Low)****PPSD (CH Mid)**

PPSD (CH High)

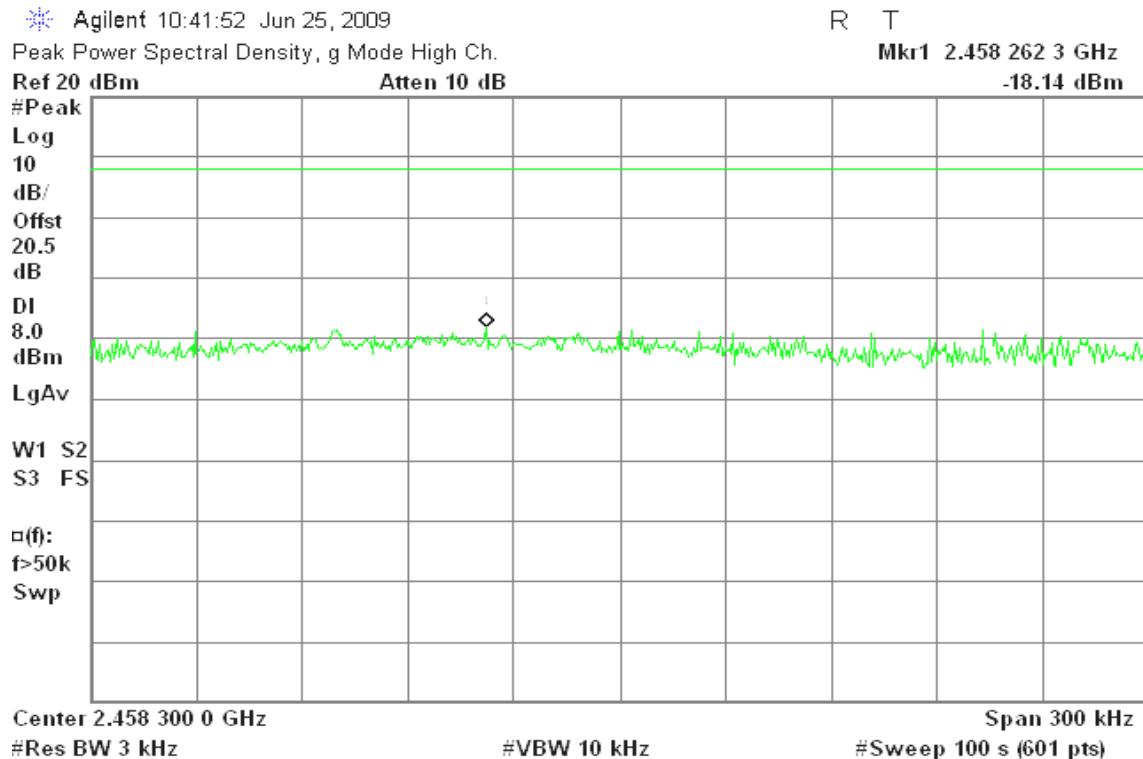


draft 802.11n Standard-20 MHz Channel mode / Chain 1


PPSD (CH Low)


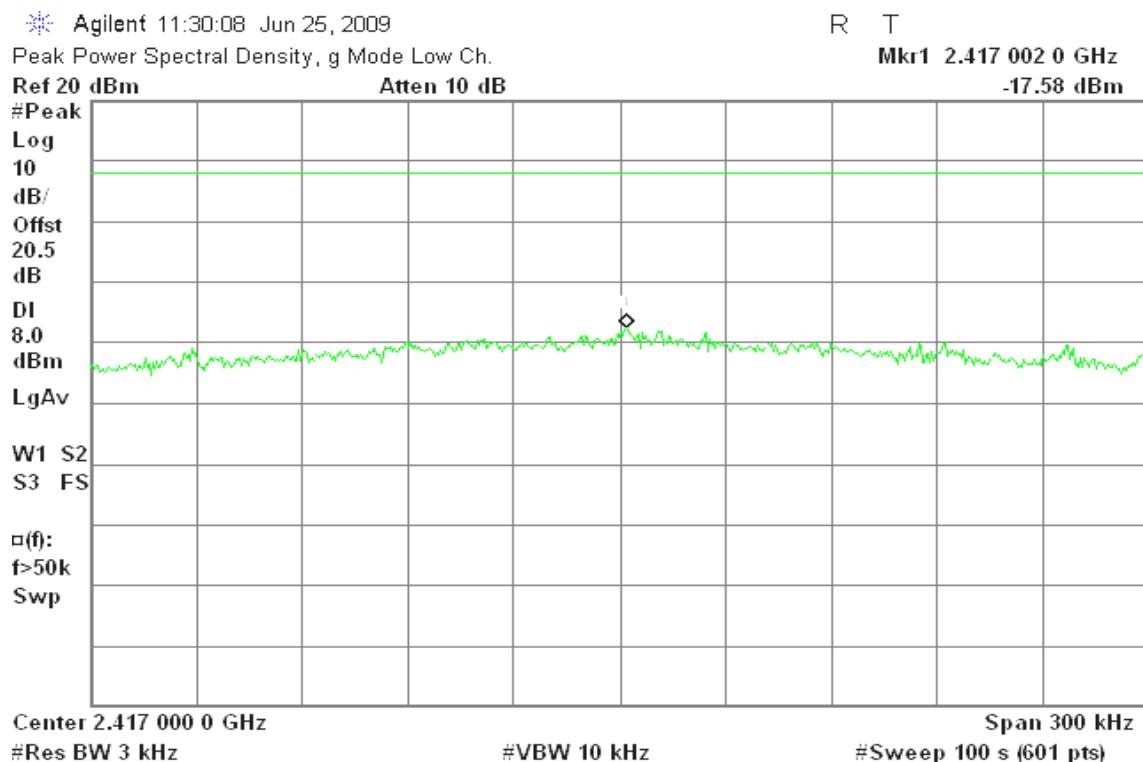


PPSD (CH Mid)

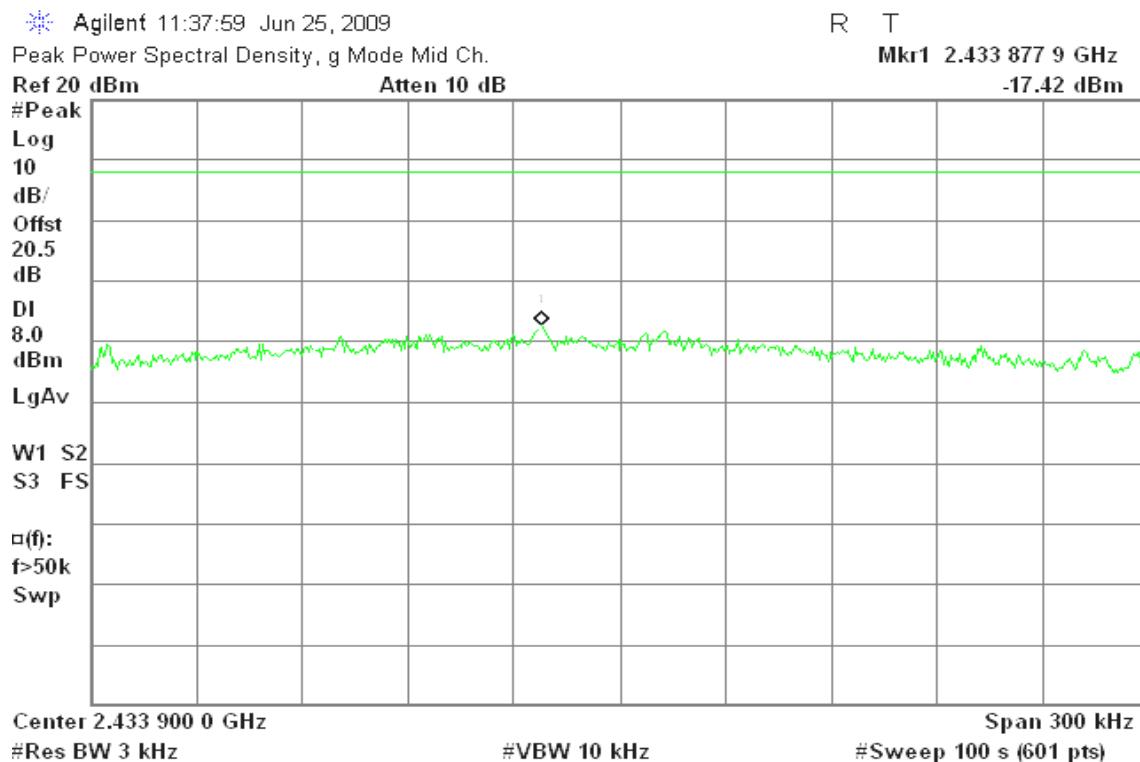


PPSD (CH High)

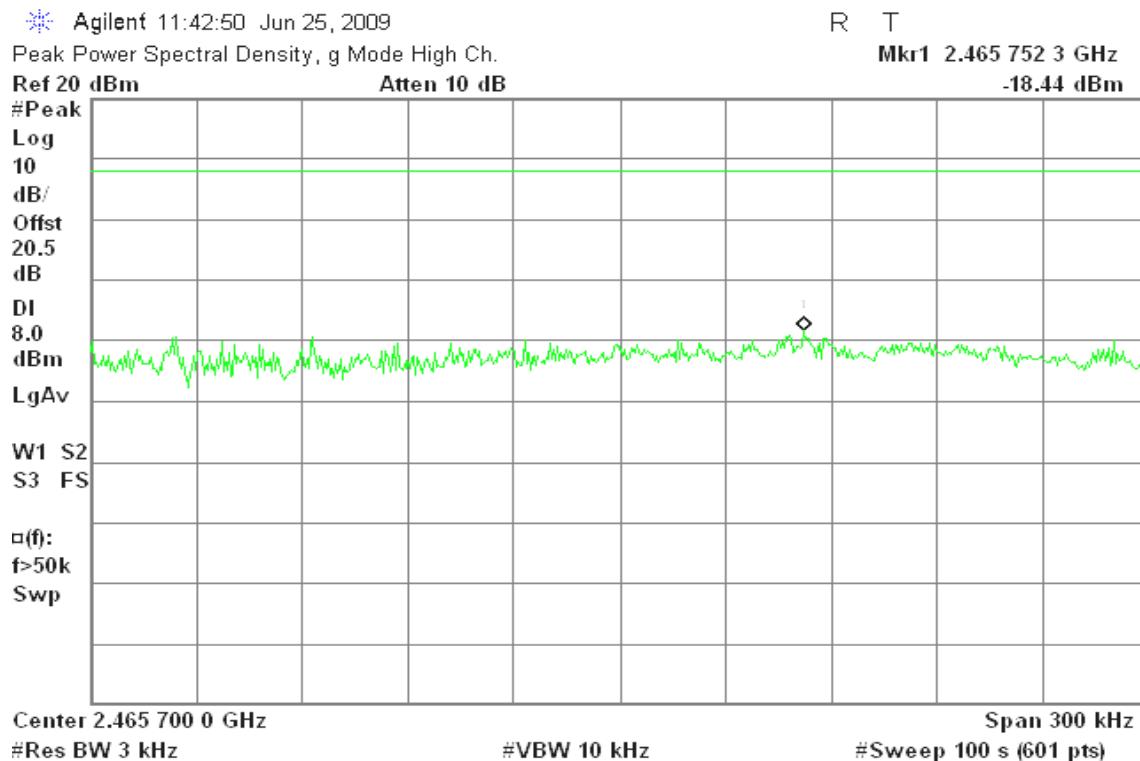

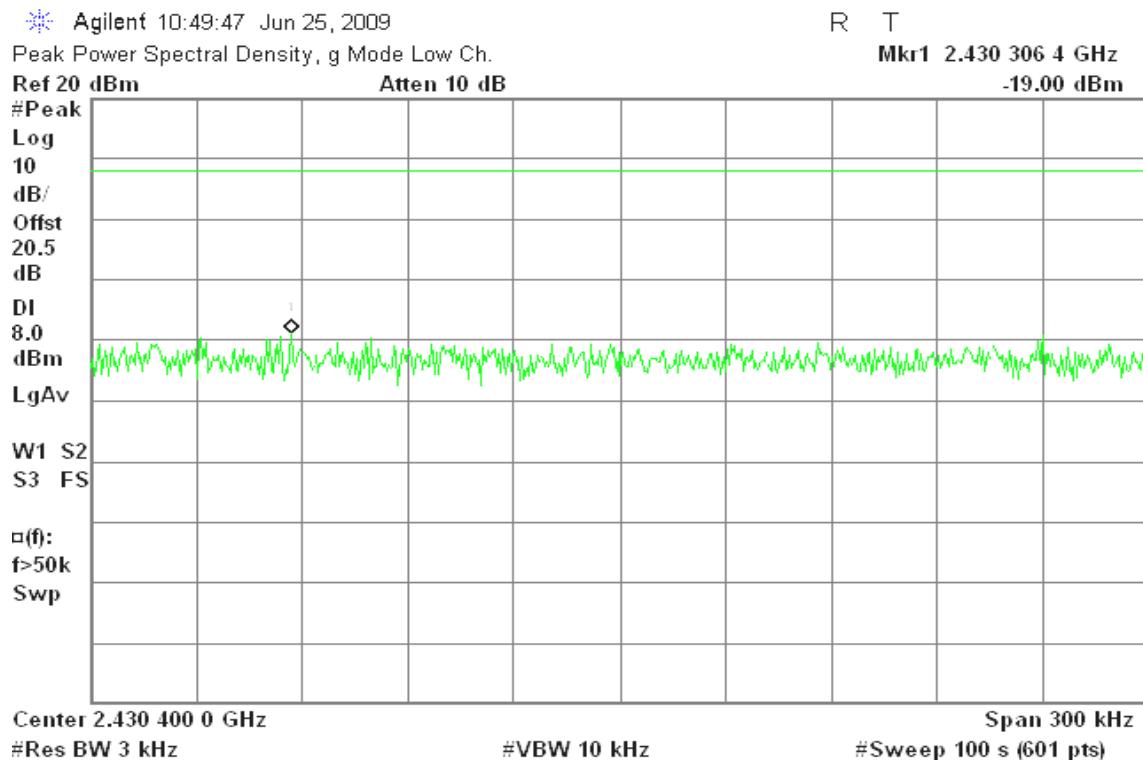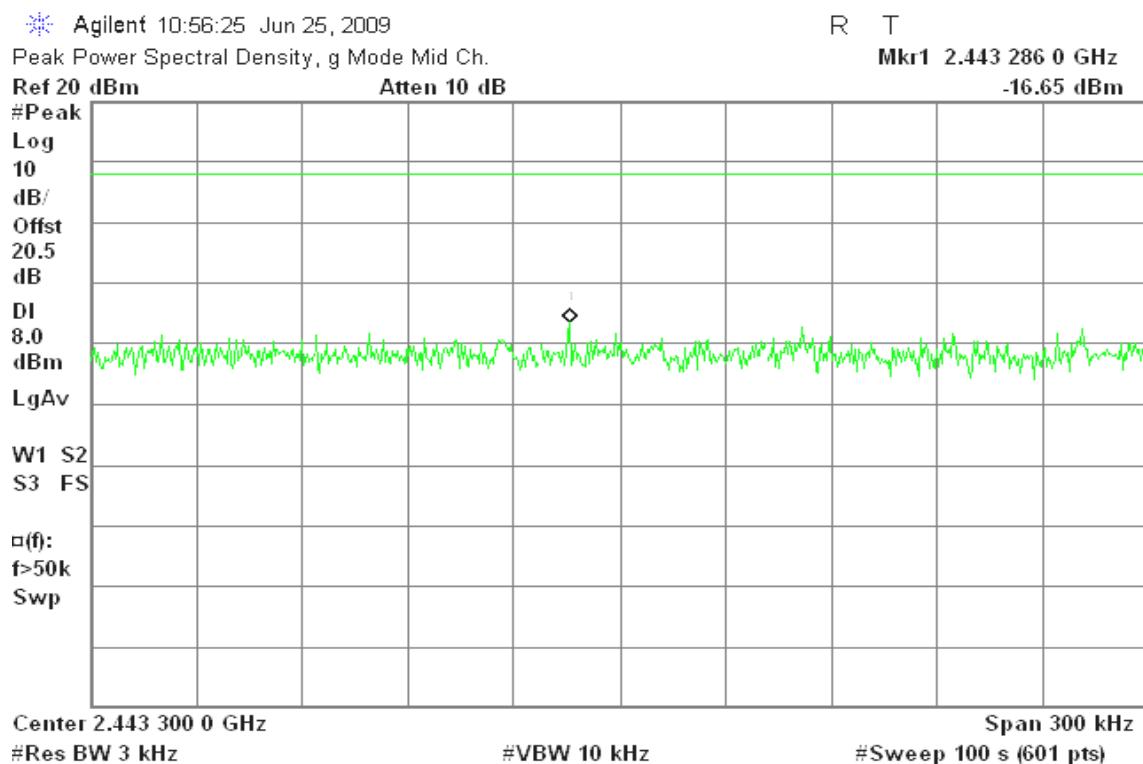
draft 802.11n Wide-40 MHz Channel mode / Chain 0**PPSD (CH Low)****PPSD (CH Mid)**

PPSD (CH High)

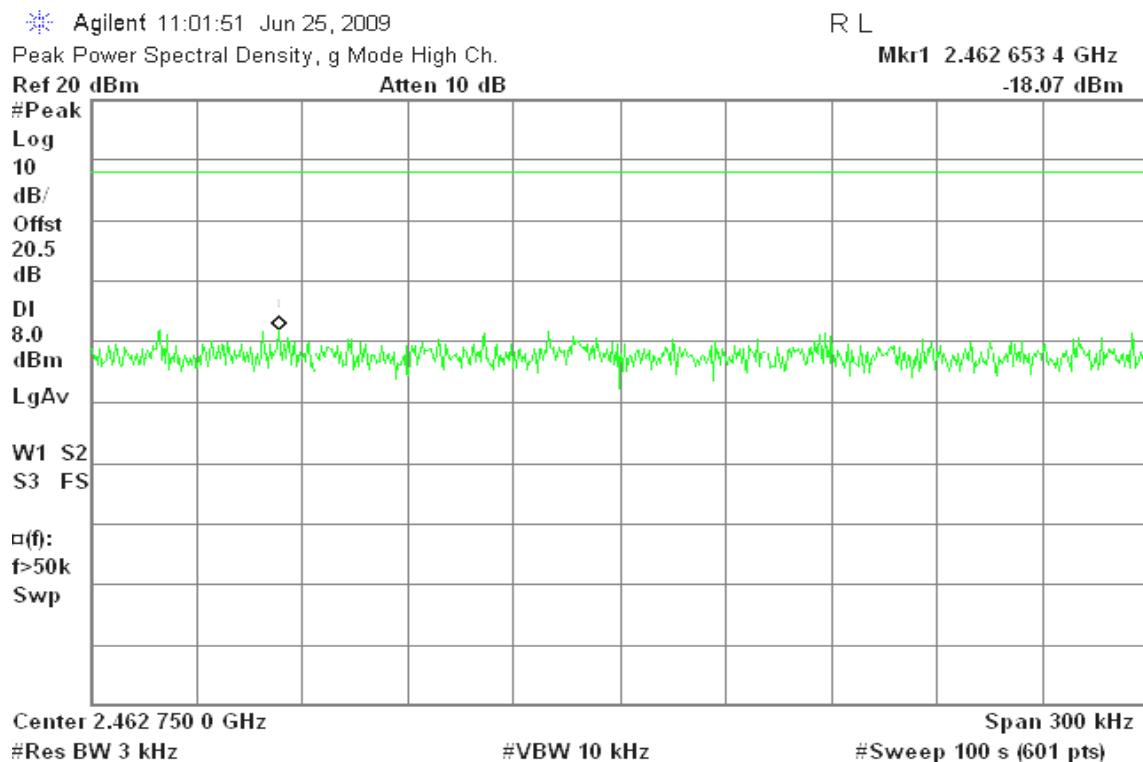


draft 802.11n Wide-40 MHz Channel mode / Chain 1


PPSD (CH Low)


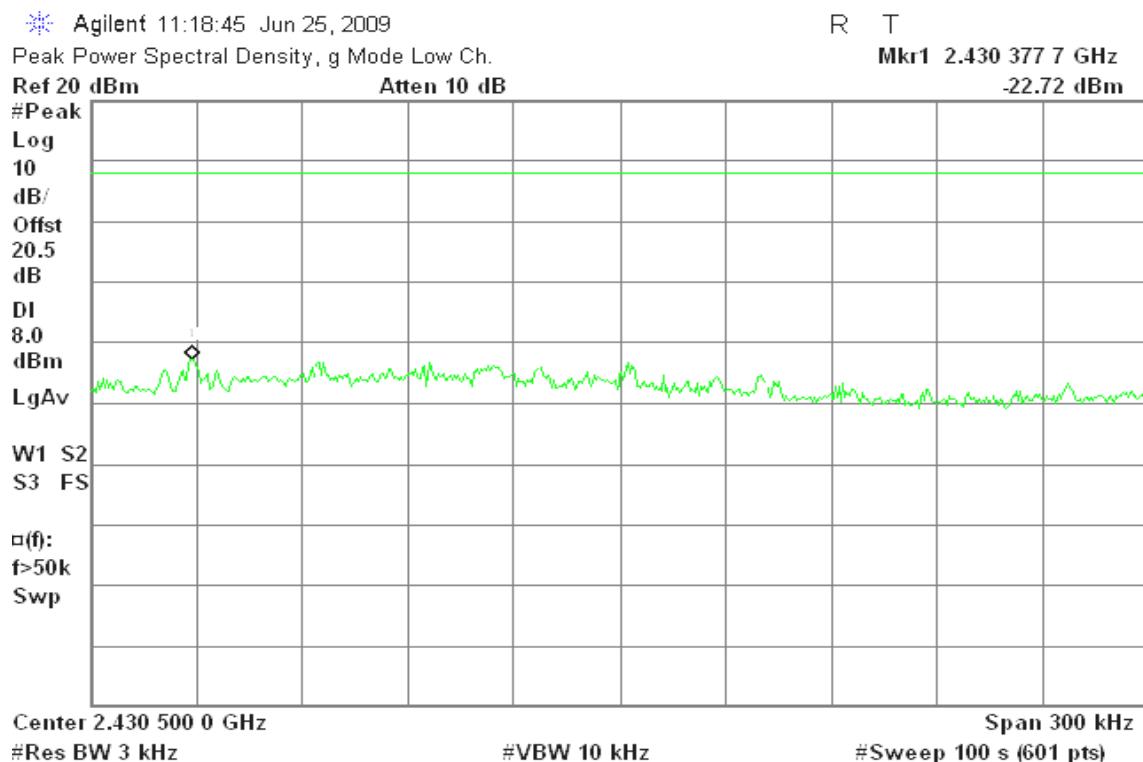


PPSD (CH Mid)

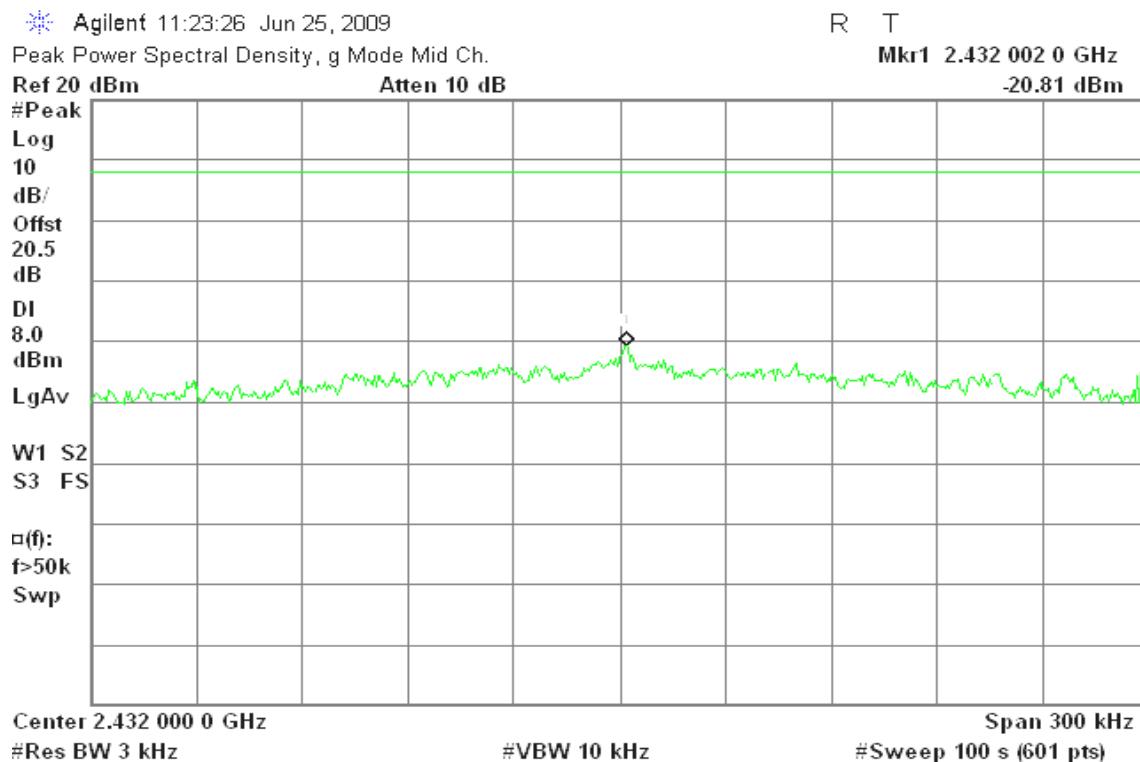


PPSD (CH High)

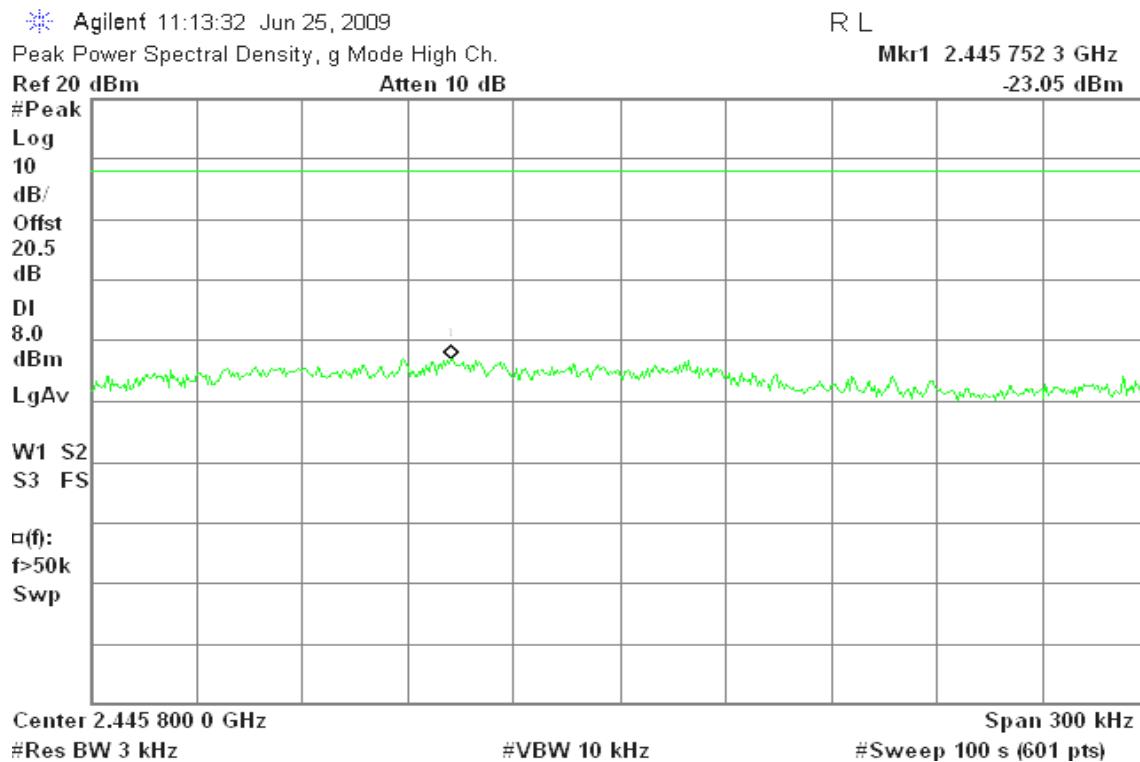

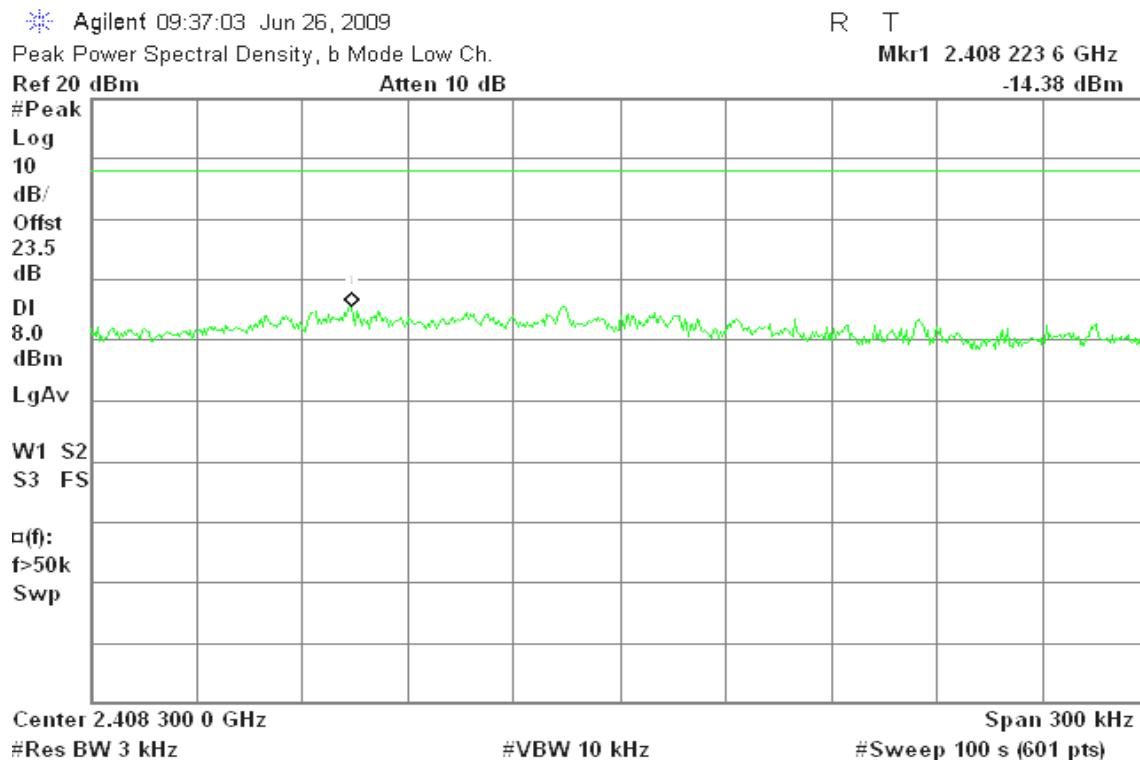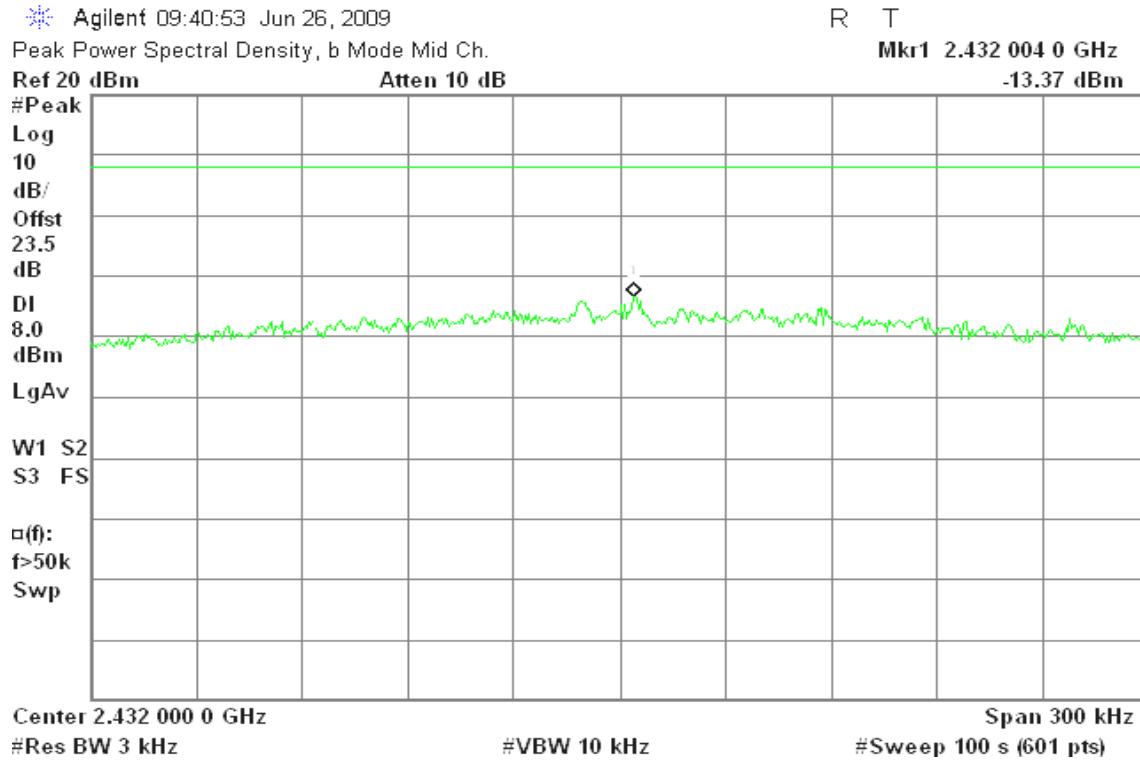
draft 802.11n Standard-20 MHz Channel mode with combiner
PPSD (CH Low)

PPSD (CH Mid)

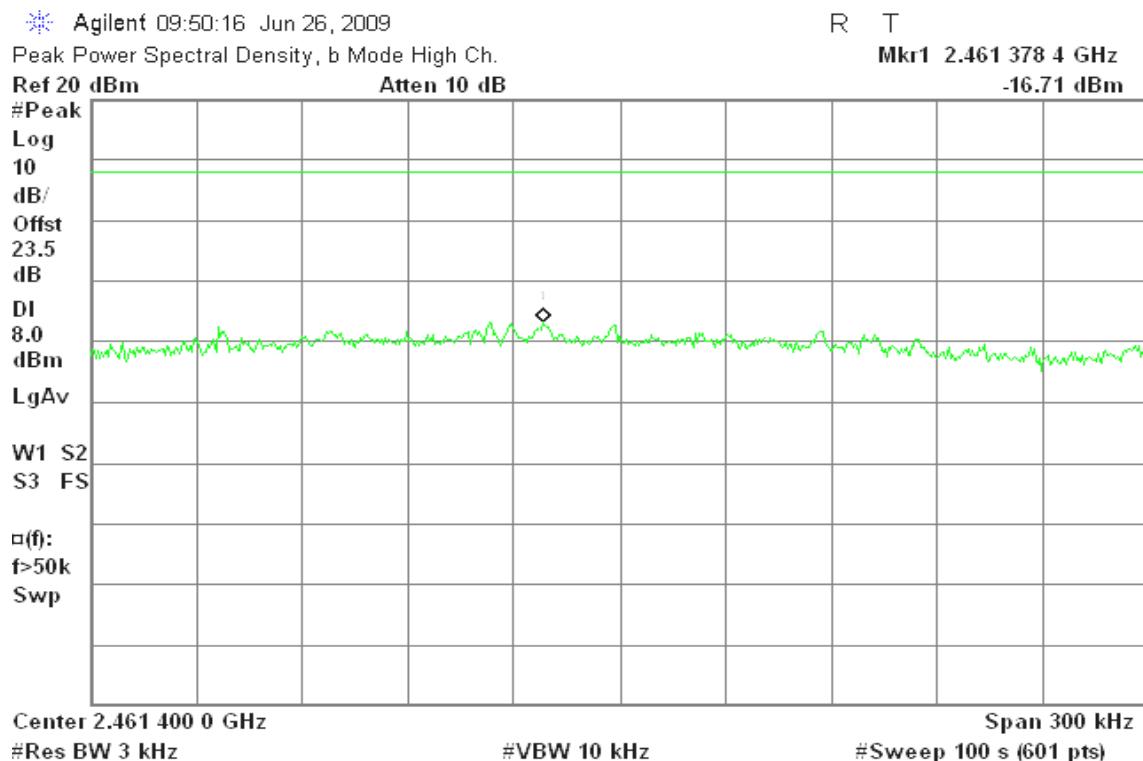
PPSD (CH High)




draft 802.11n Wide-40 MHz Channel mode with combiner

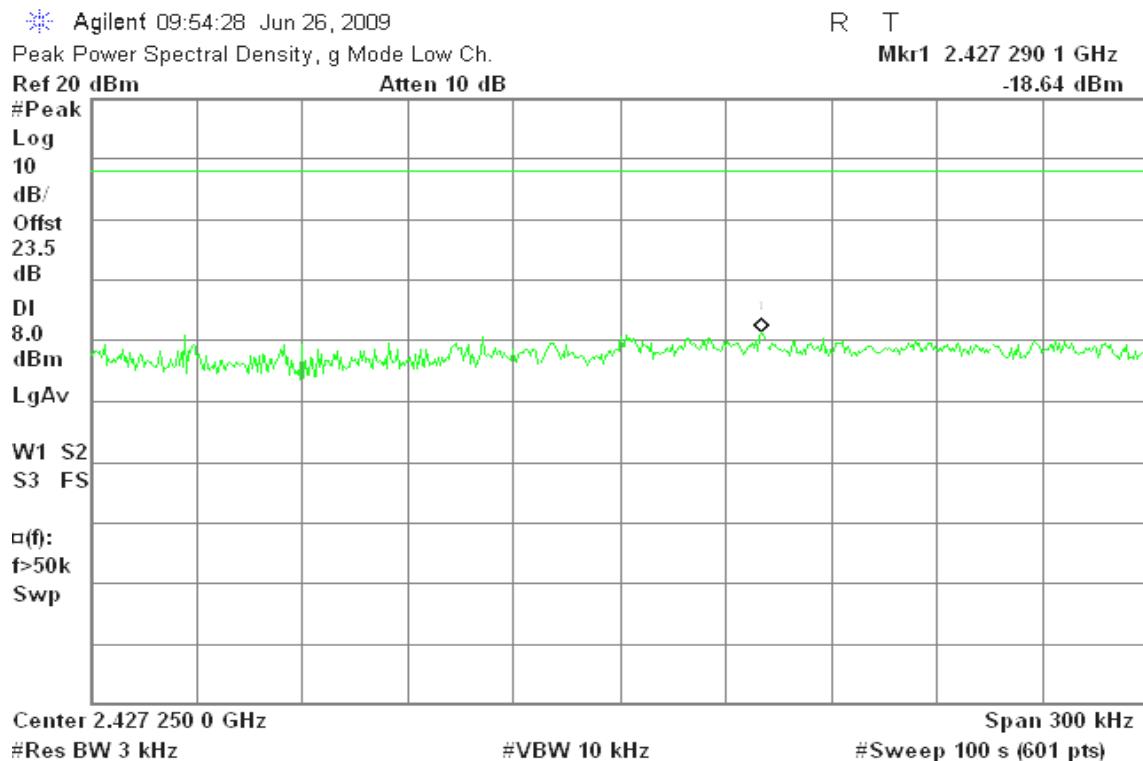
PPSD (CH Low)



PPSD (CH Mid)

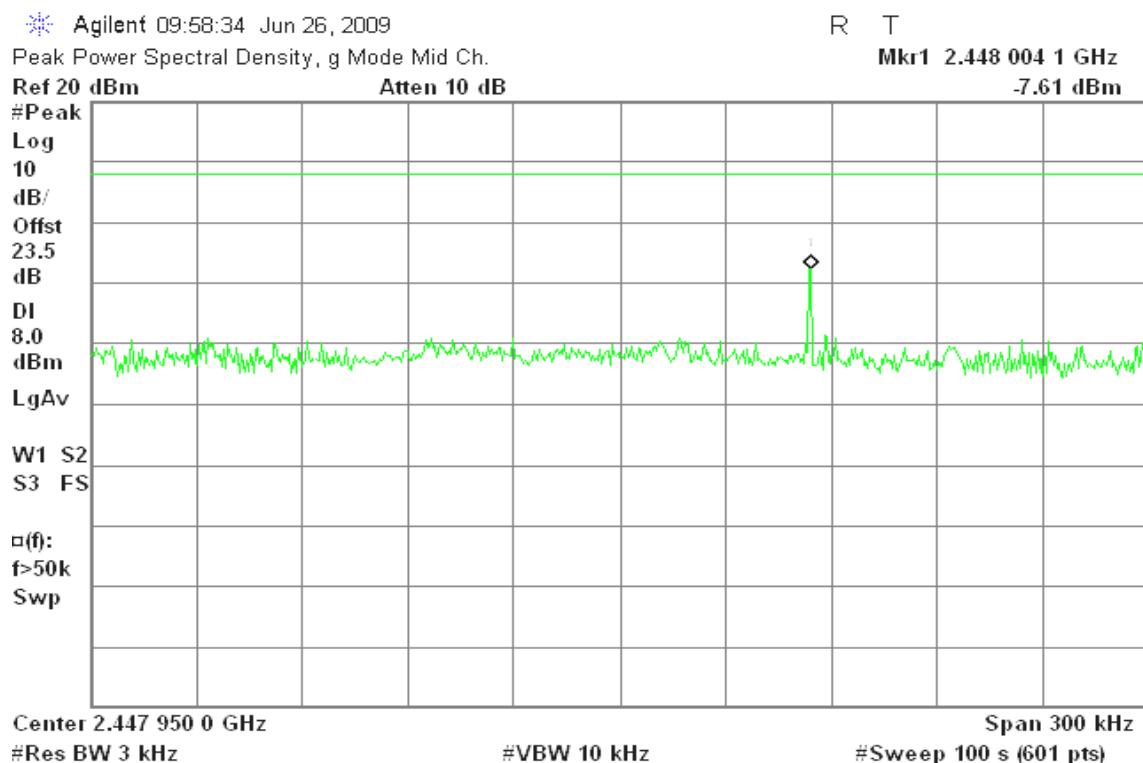

PPSD (CH High)

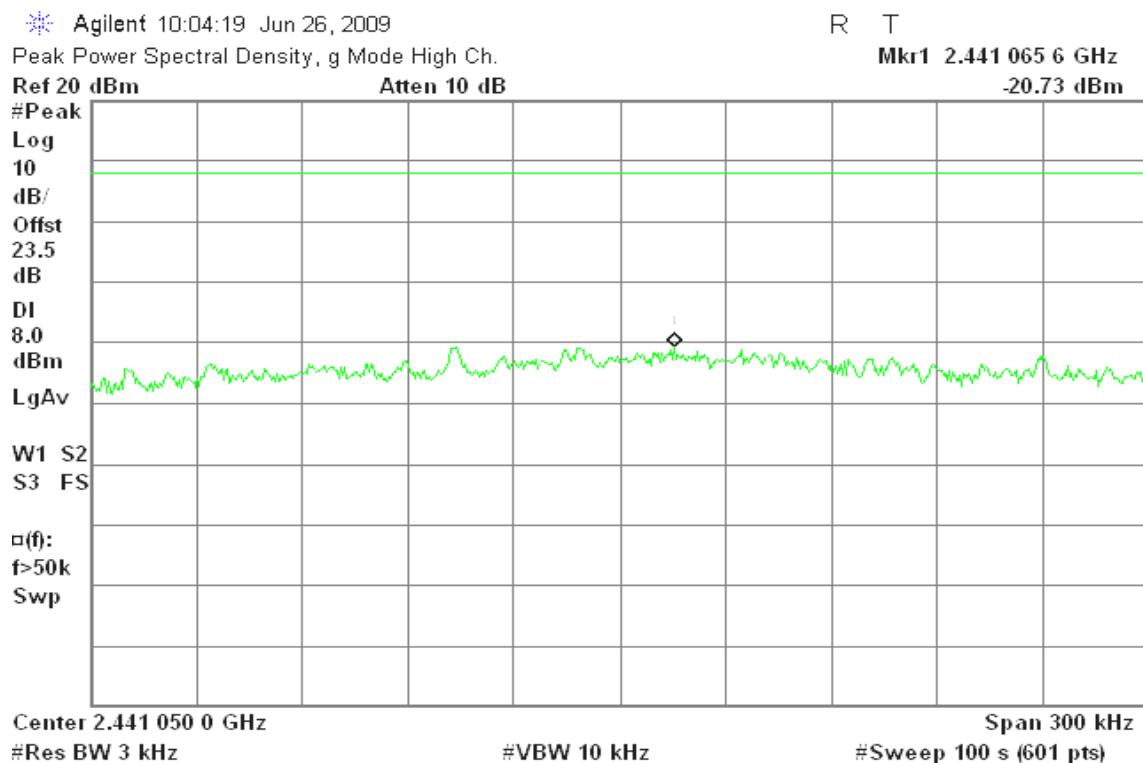


8.7 SPURIOUS EMISSIONS

8.7.1 Conducted Measurement

LIMIT

According to §15.247(d) & RSS-210 §A8.5, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.


TEST RESULTS

No non-compliance noted


Test Plot

IEEE 802.11b mode


CH Low

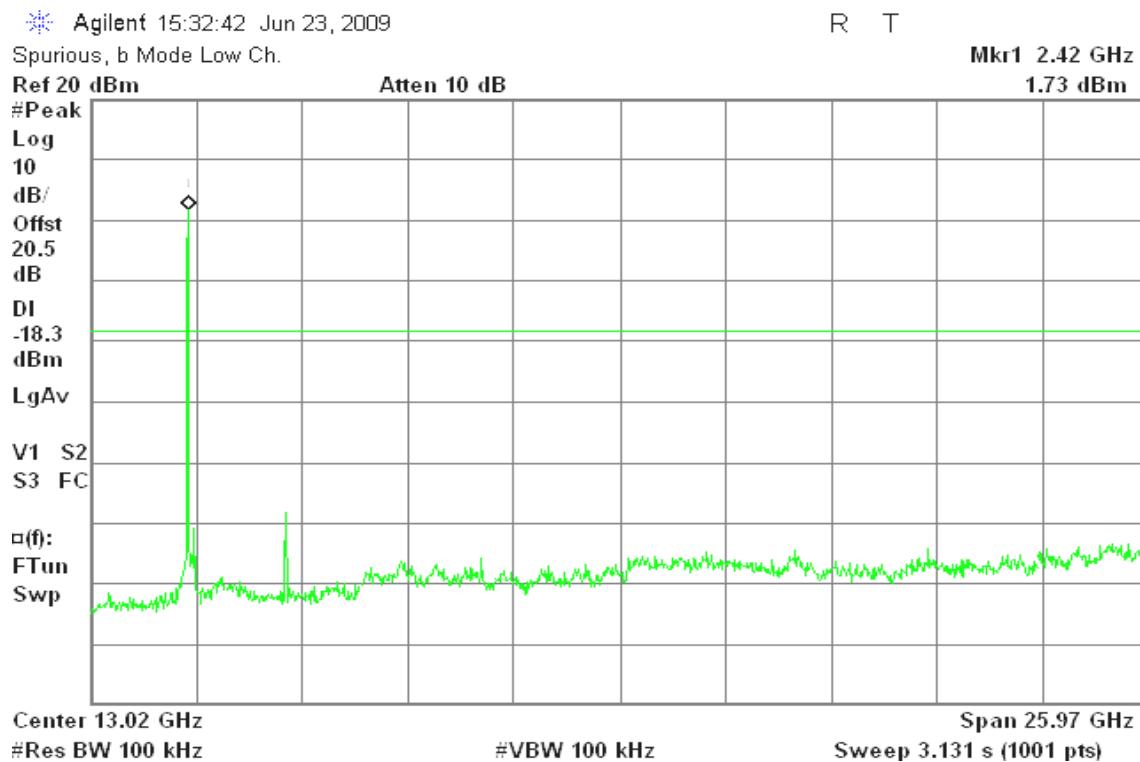


CH Mid

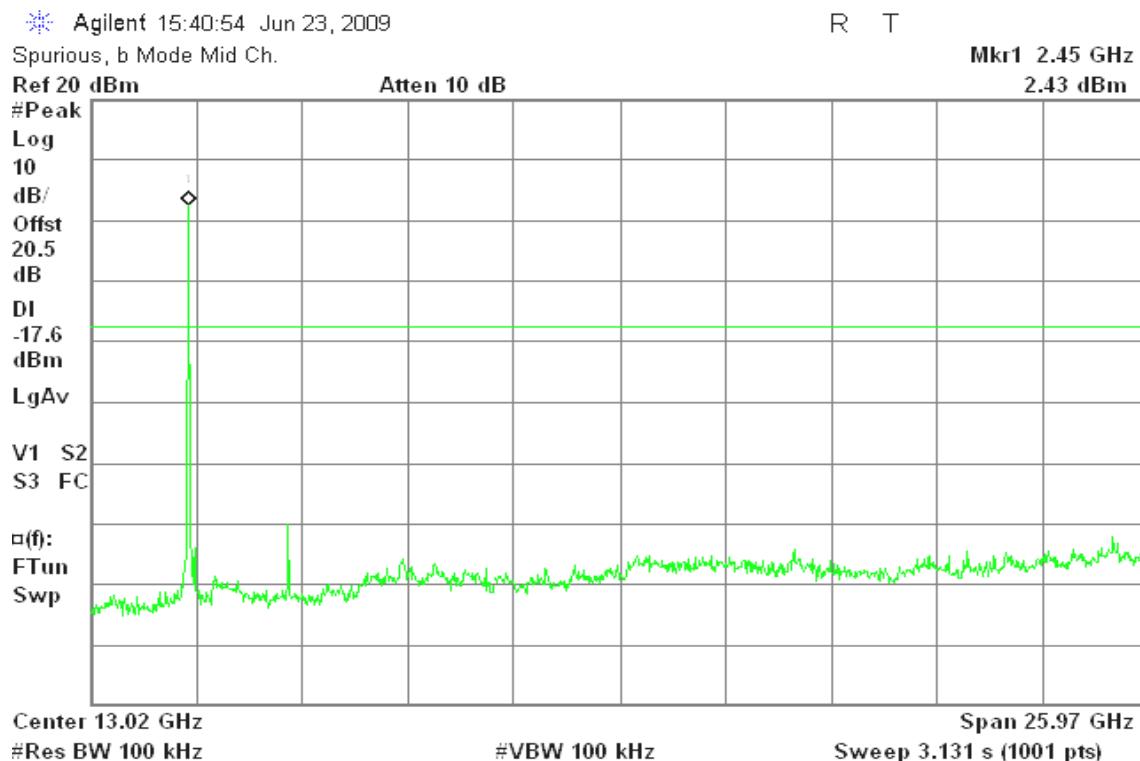


CH High

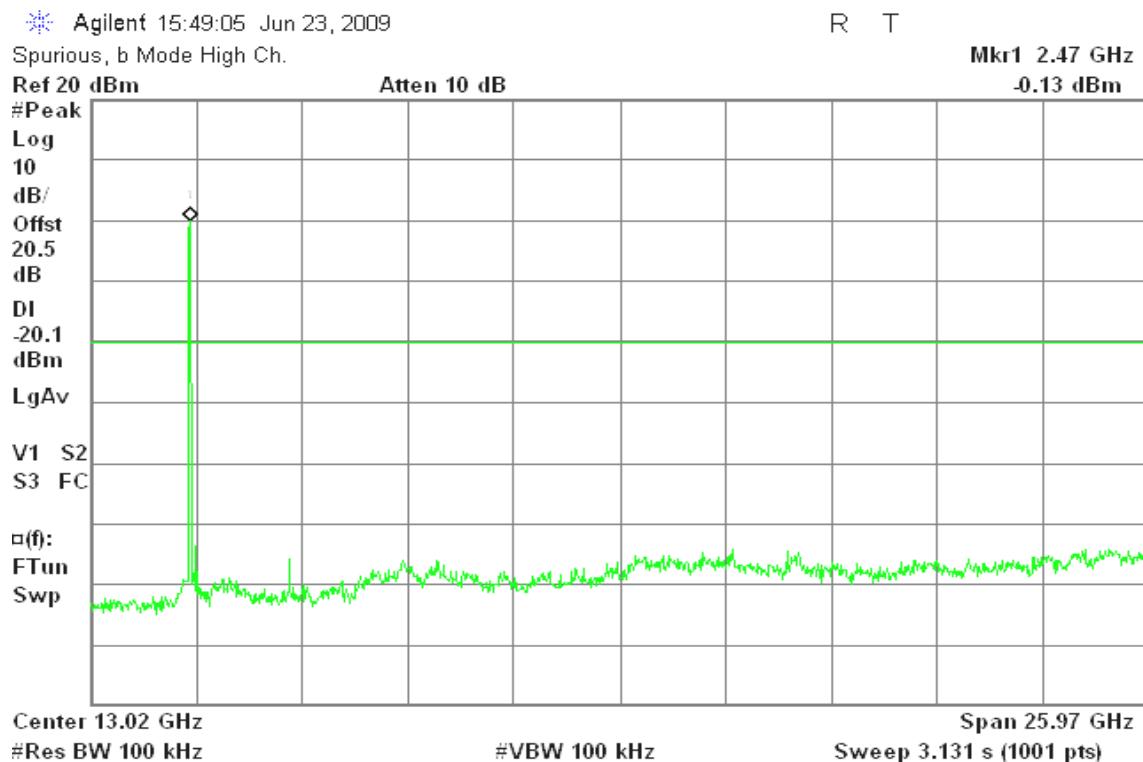


CH Low


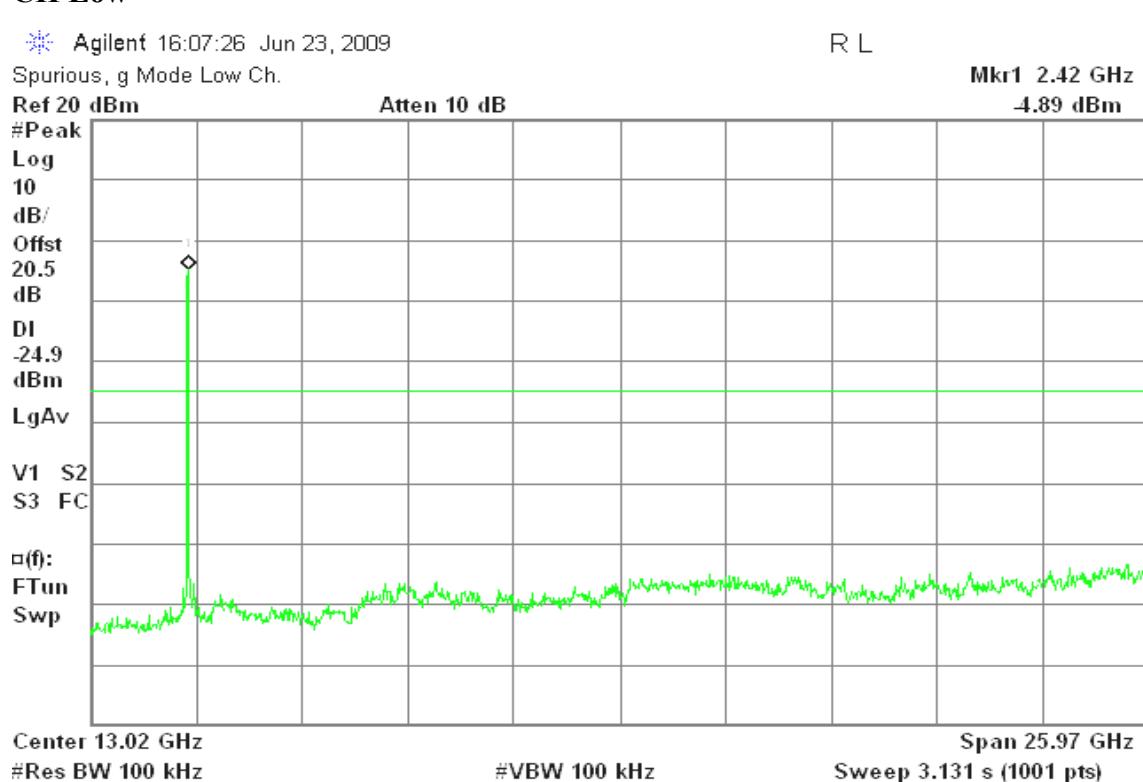


CH Mid

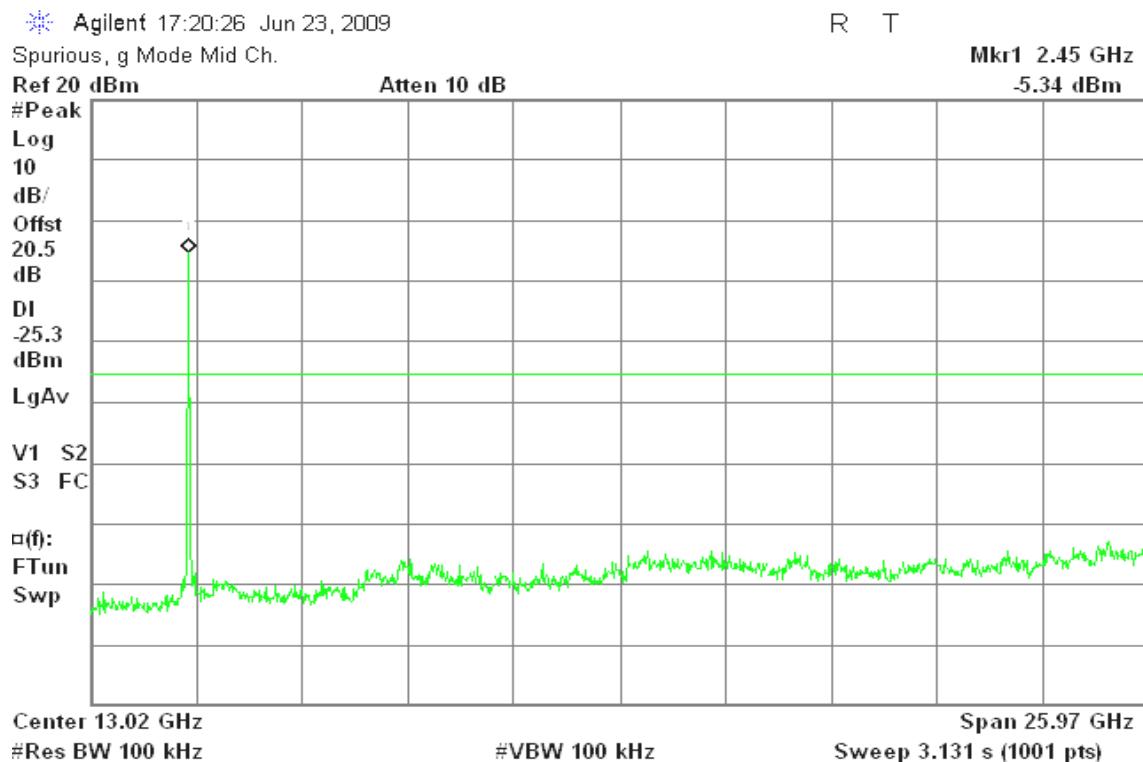


CH High

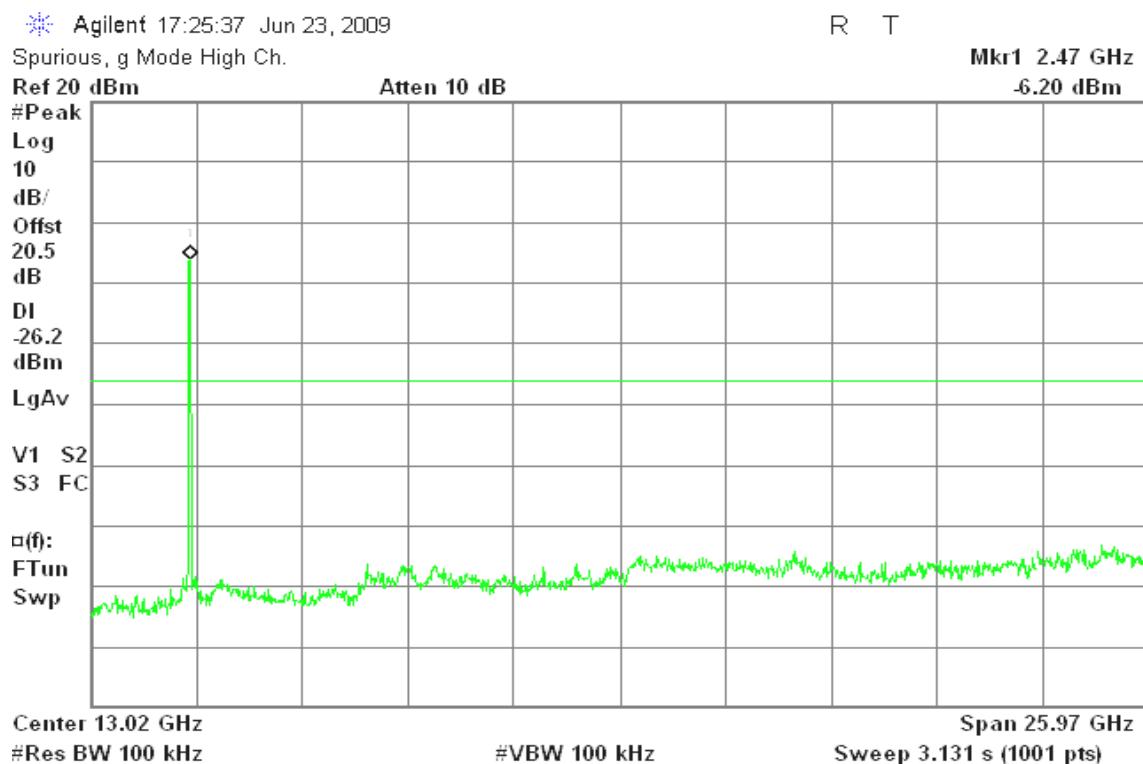

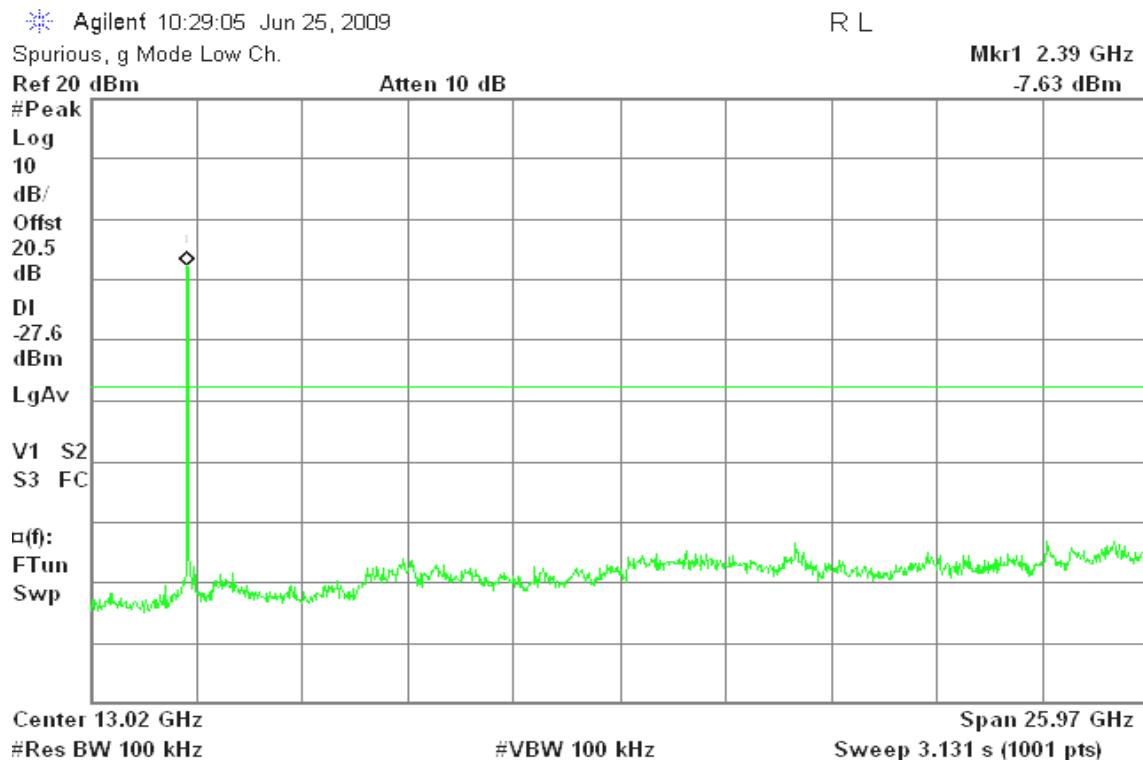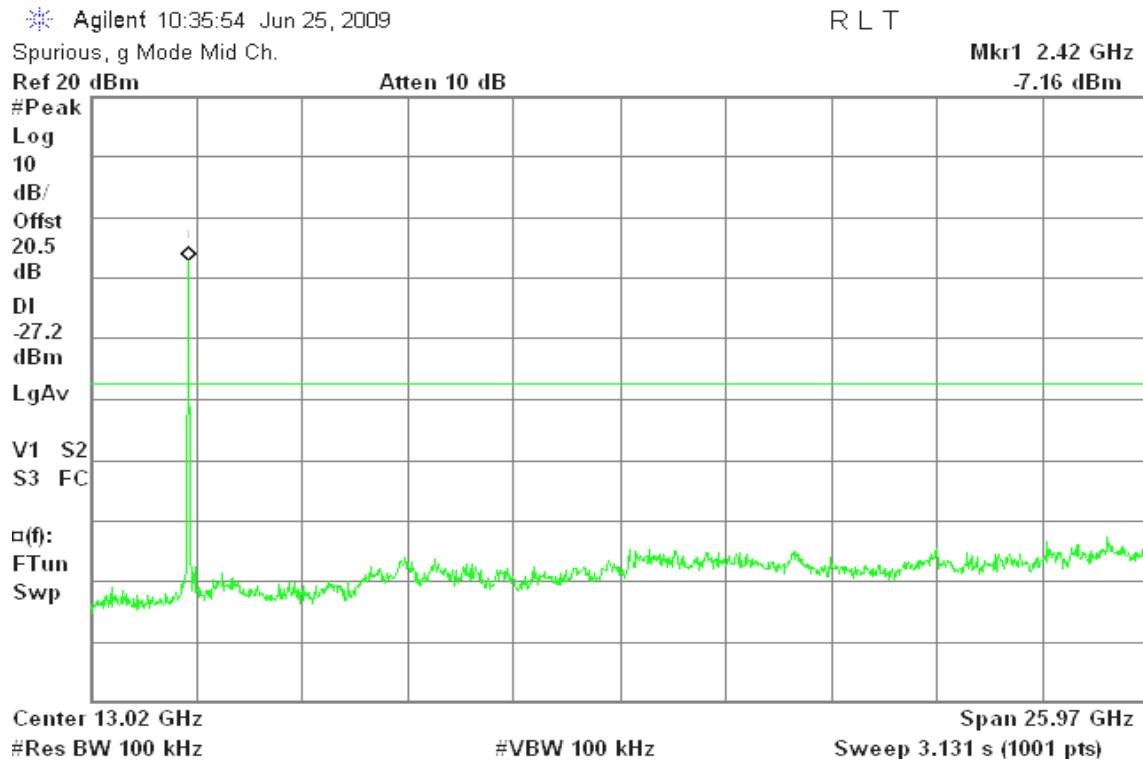
draft 802.11n Standard-20 MHz Channel mode / Chain 0**CH Low****CH Mid**

CH High

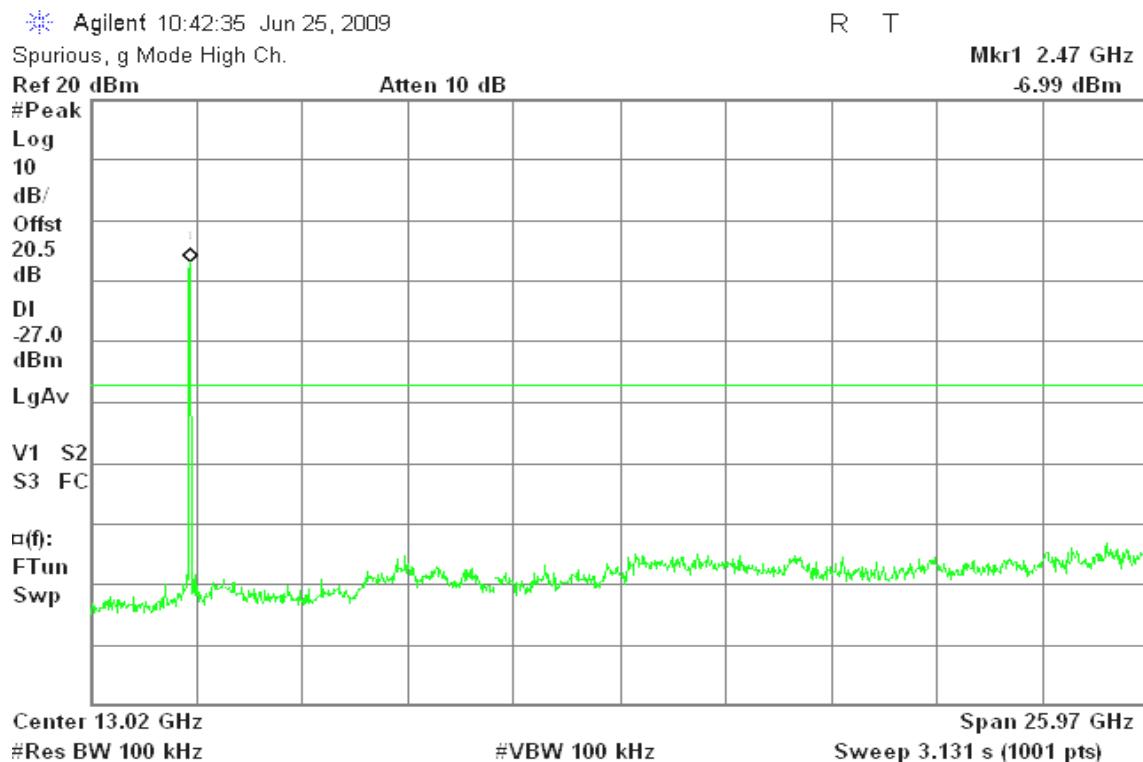


draft 802.11n Standard-20 MHz Channel mode / Chain 1


CH Low


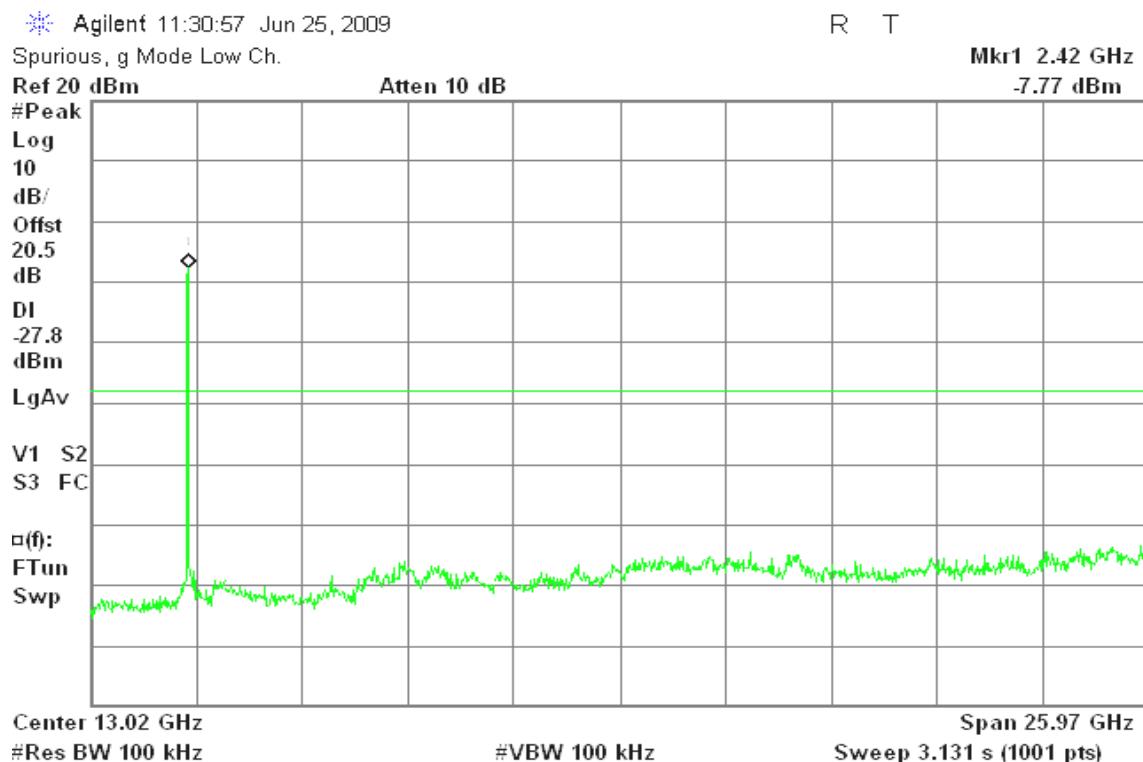




CH Mid

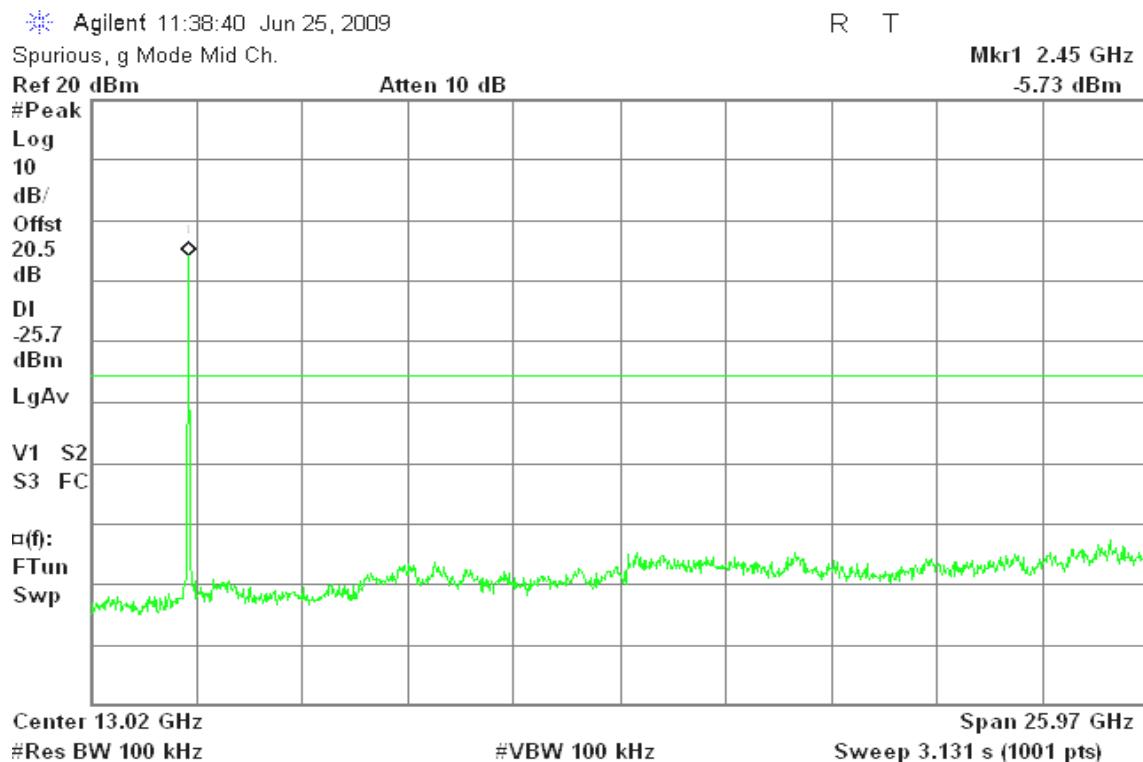


CH High

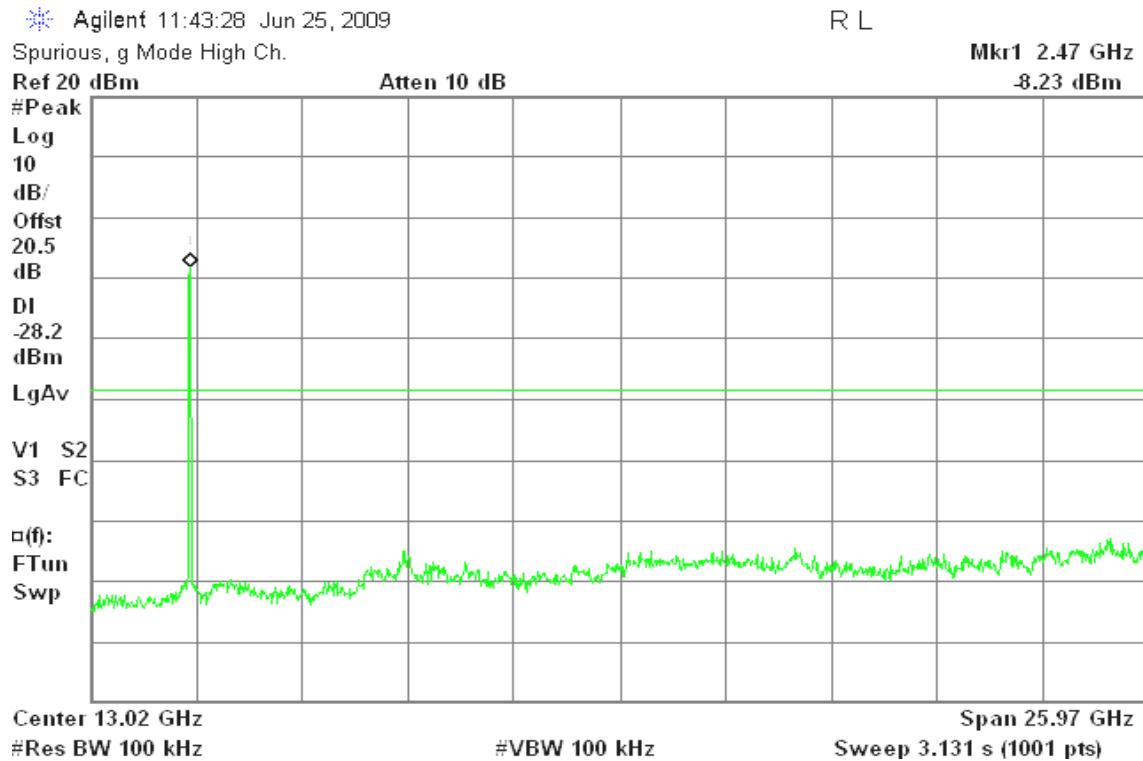

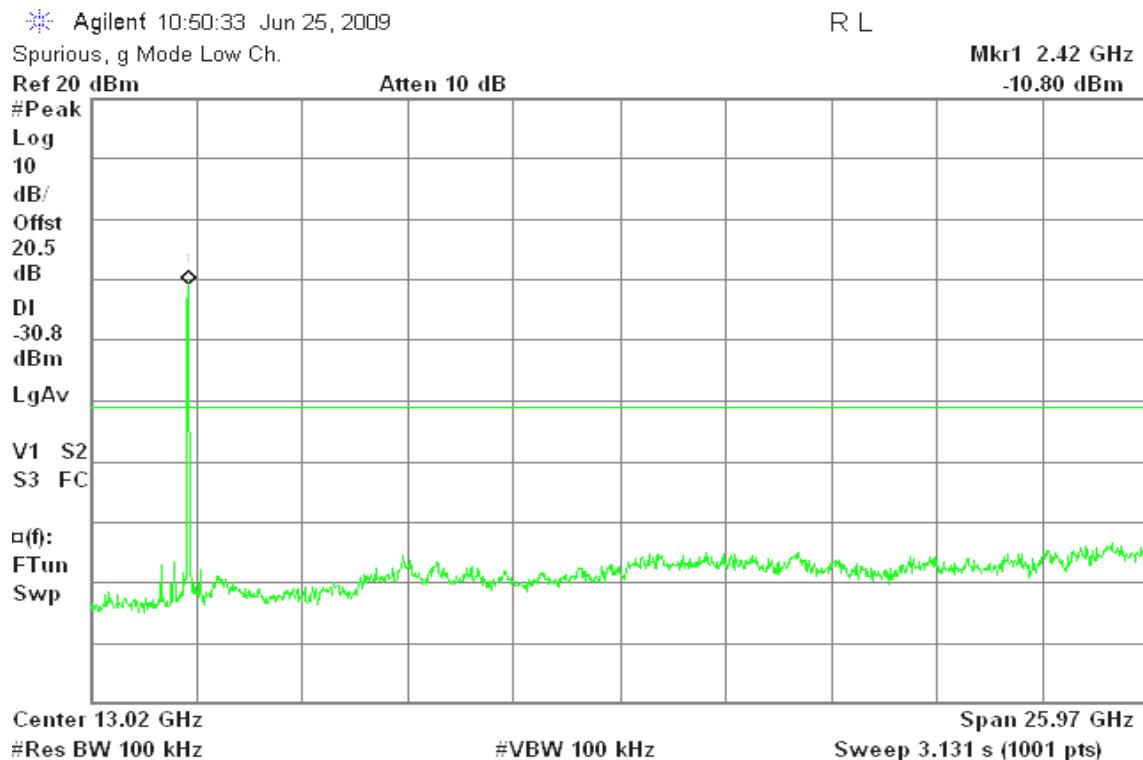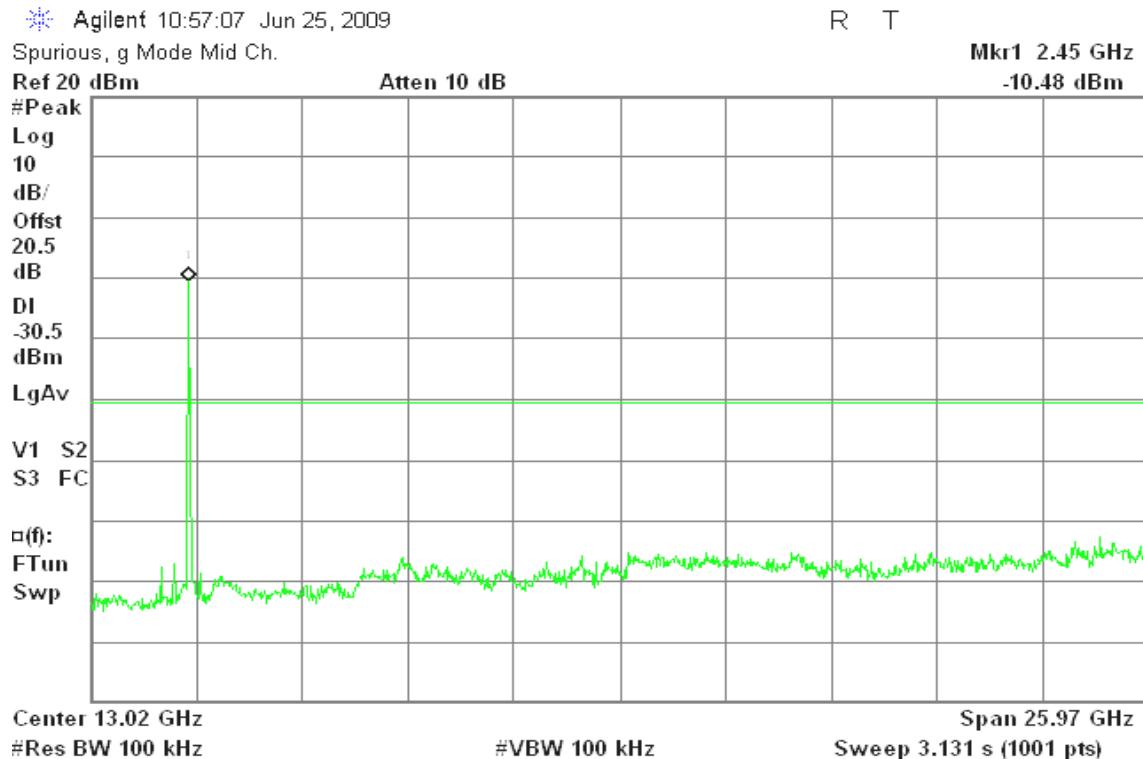
draft 802.11n Wide-40 MHz Channel mode / Chain 0**CH Low****CH Mid**

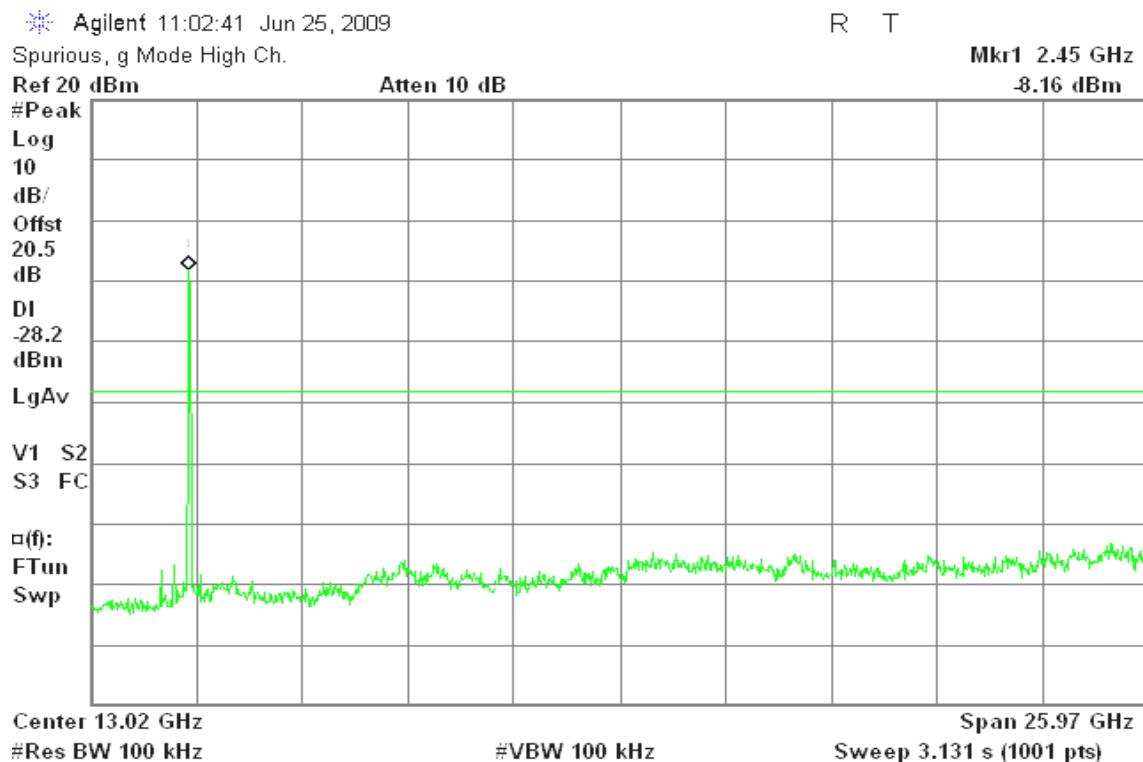
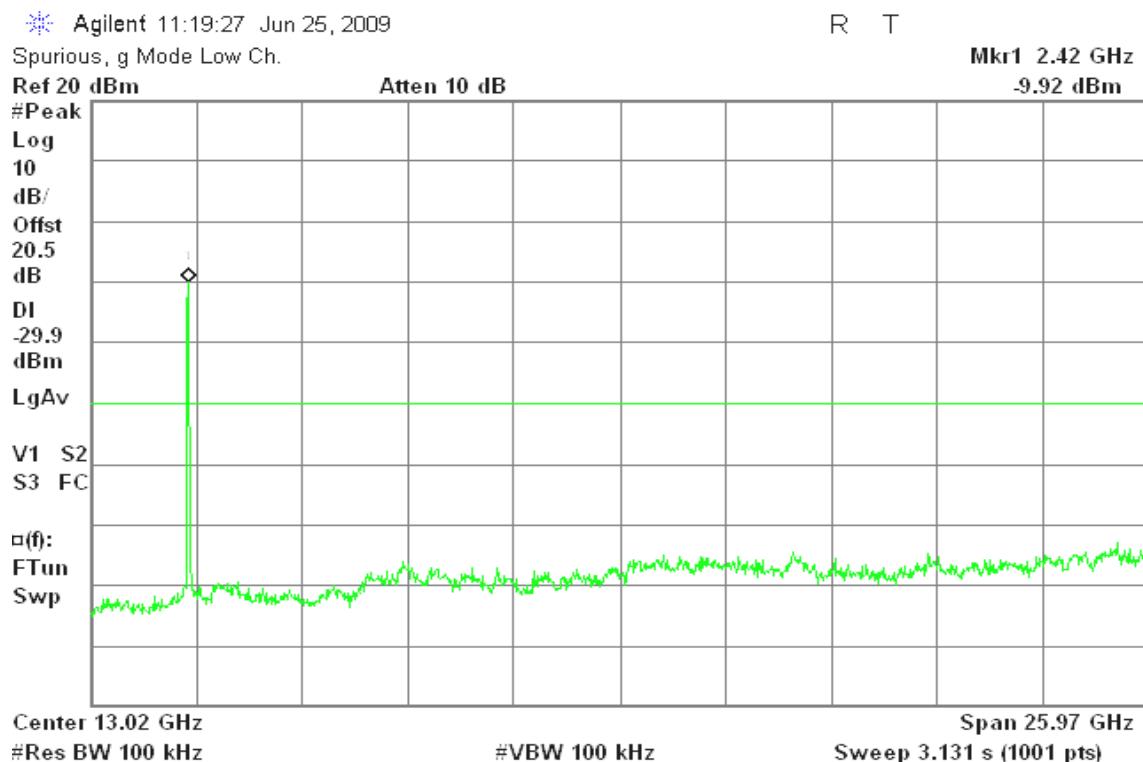
CH High**draft 802.11n Wide-40 MHz Channel mode / Chain 1****CH Low**


CH Mid

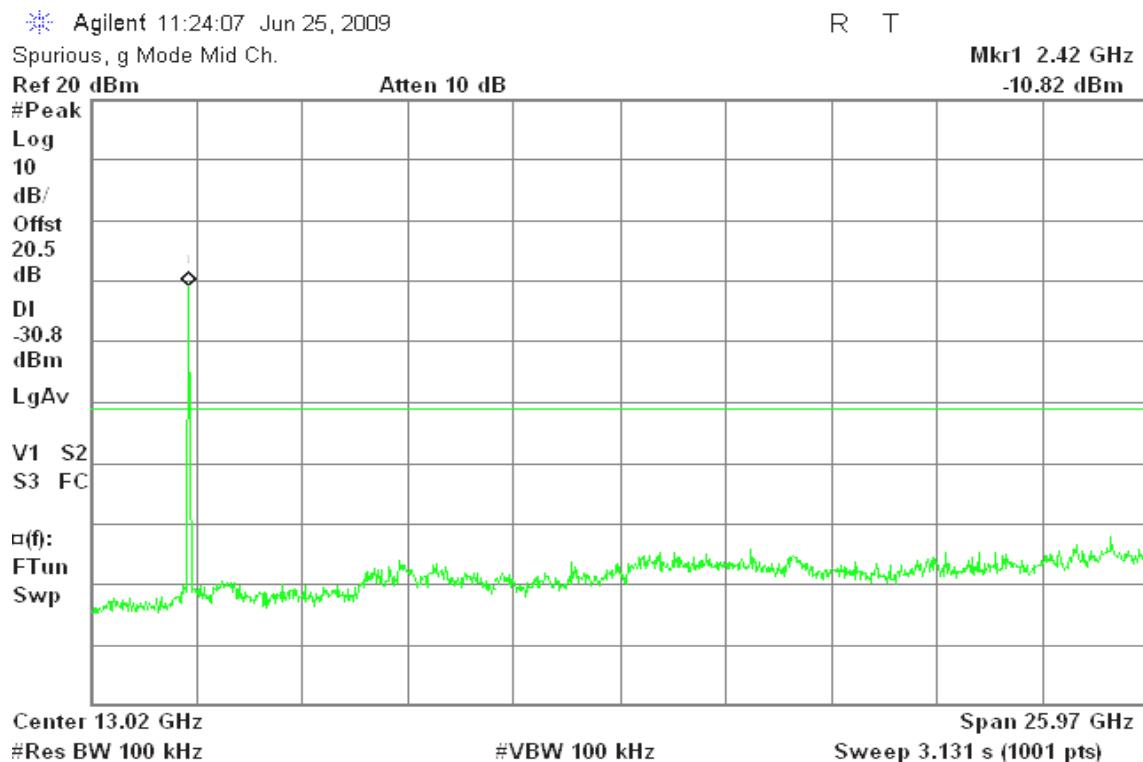


CH High

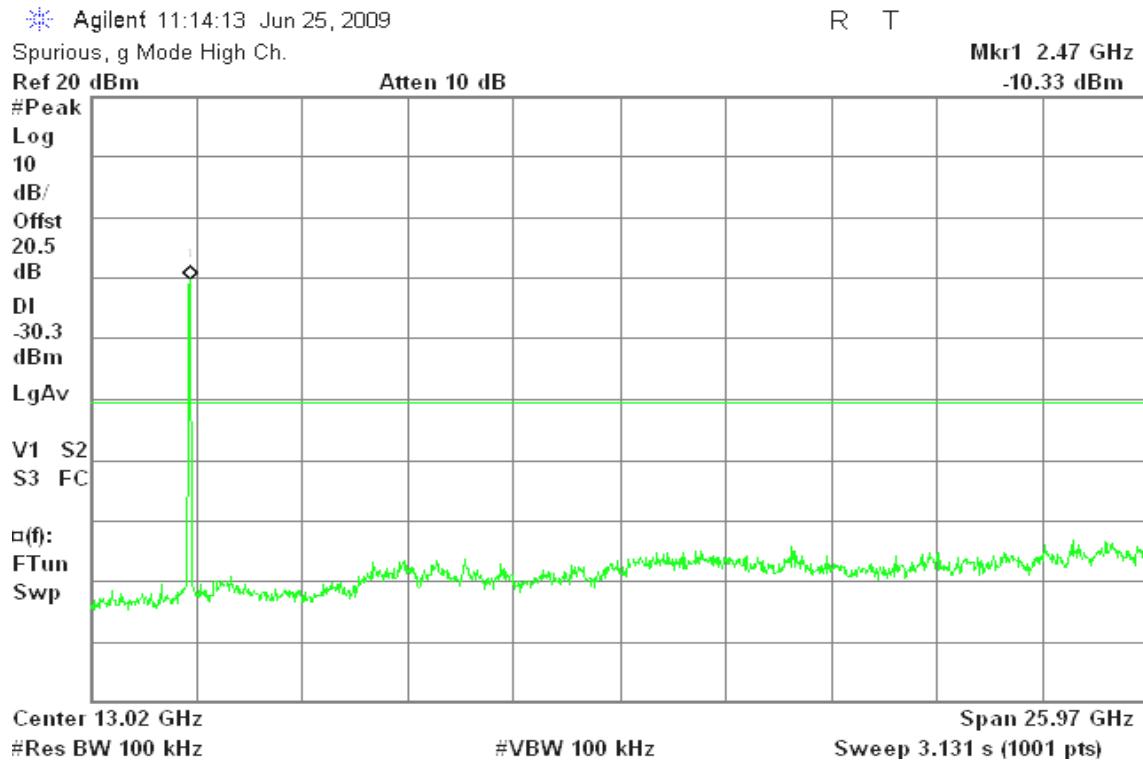

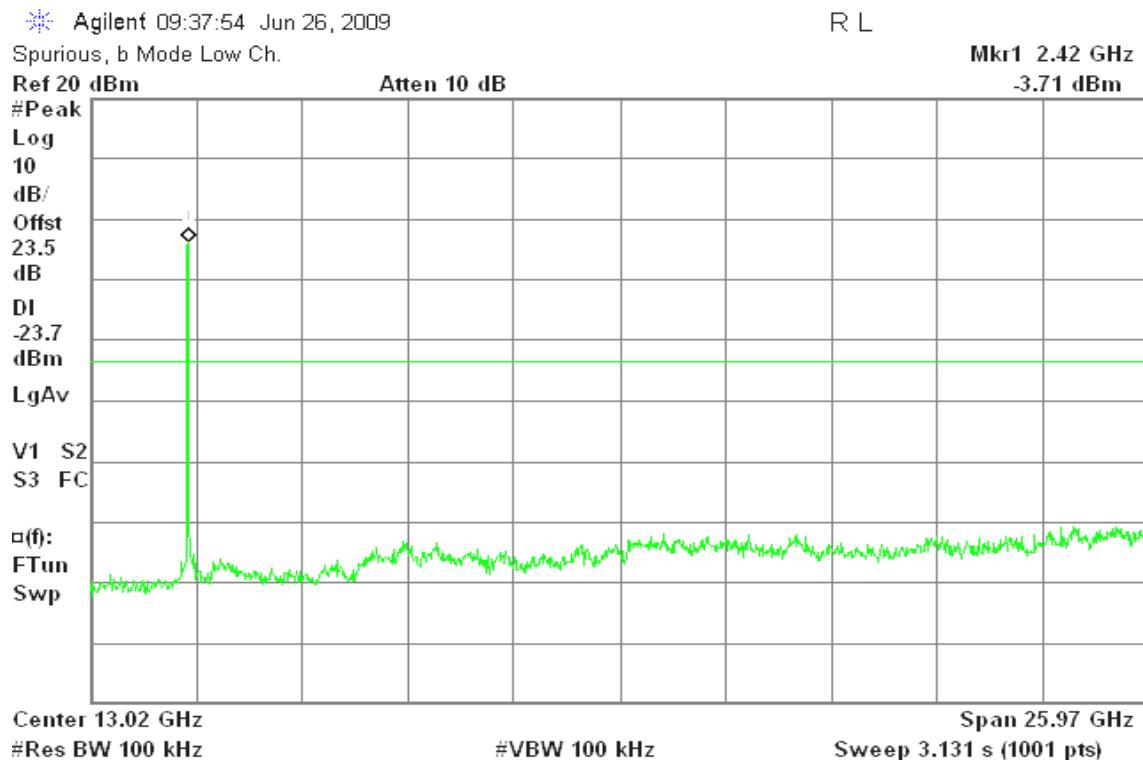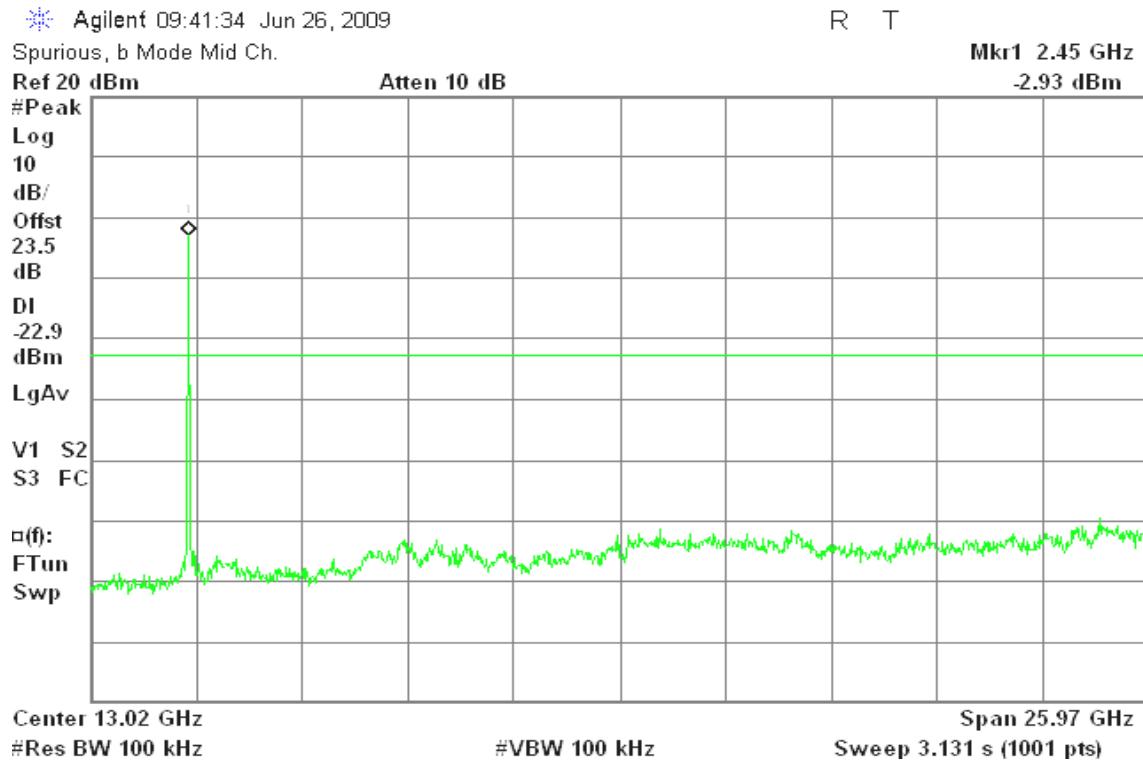draft 802.11n Standard-20 MHz Channel mode with combiner**CH Low****CH Mid**

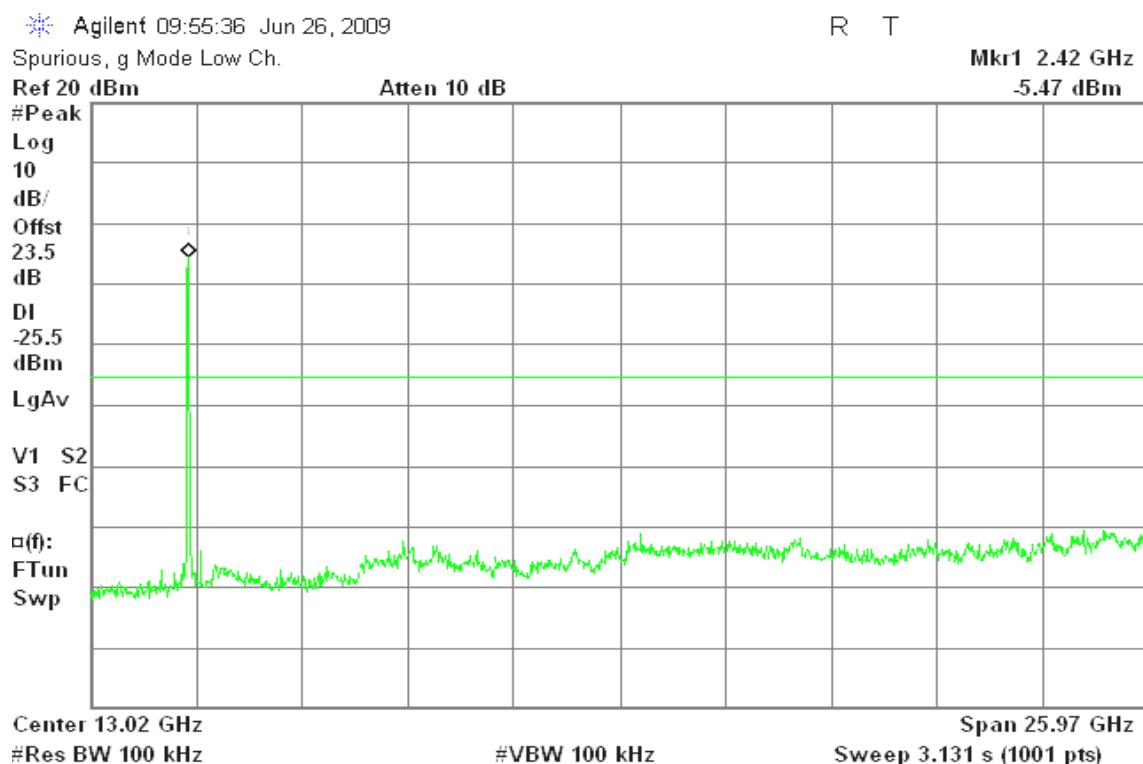CH High**draft 802.11n Wide-40 MHz Channel mode with combiner****CH Low**

CH Mid

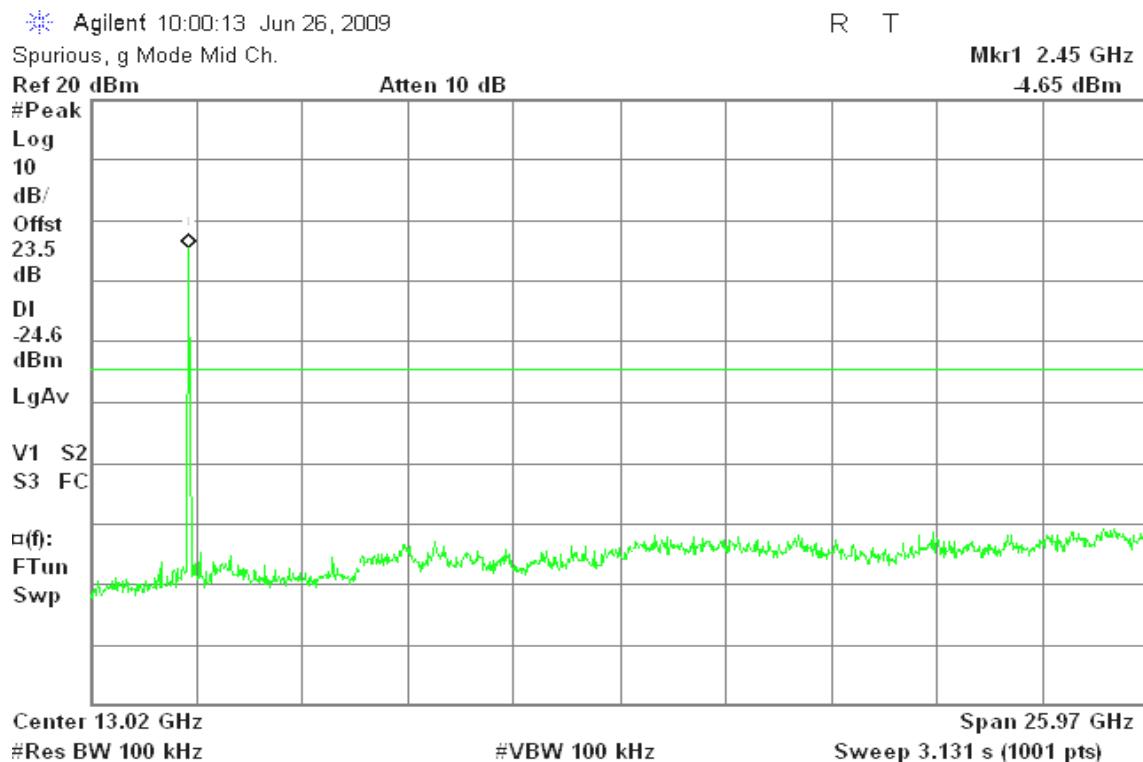

CH High





8.8 RADIATED EMISSIONS

LIMIT

- According to §15.205, 209(a) & RSS-210 Clause 2.6 (Transmitter) and IC RSS-GEN Clause 6 (Receiver), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

- In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

Below 1 GHz

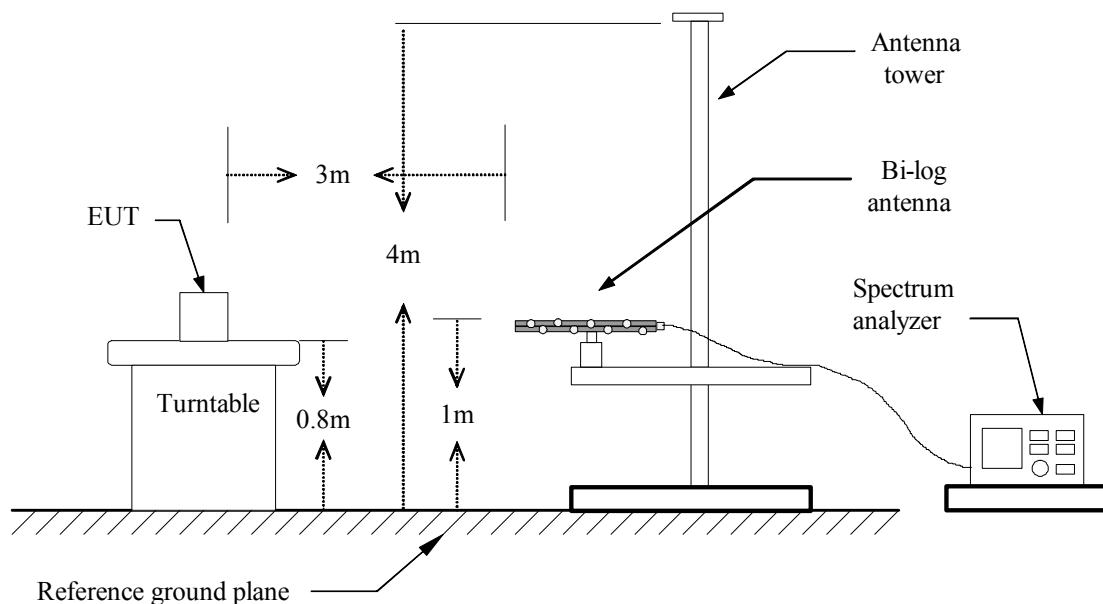

Above 1 GHz

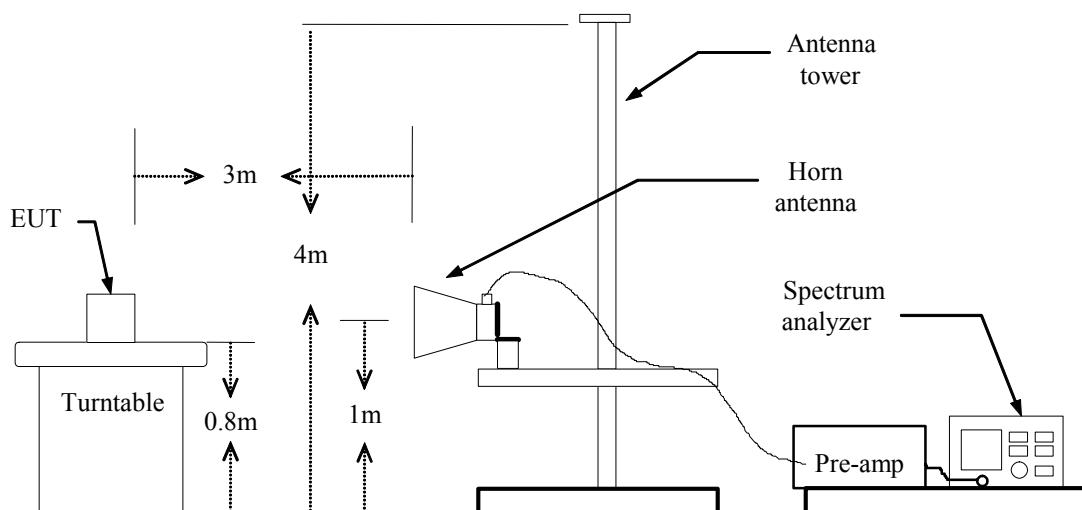



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1GHz****Operation Mode:** Normal Link**Test Date:** July 27, 2009**Temperature:** 25°C**Tested by:** Nan Tsai**Humidity:** 50% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
60.72	V	50.63	-14.86	35.77	40.00	-4.23	Peak
133.47	V	37.64	-9.01	28.63	43.50	-14.87	Peak
228.85	V	52.18	-10.03	42.15	46.00	-3.85	Peak
233.70	V	49.59	-9.95	39.65	46.00	-6.35	Peak
405.07	V	33.72	-6.02	27.69	46.00	-18.31	Peak
666.97	V	38.48	-2.20	36.28	46.00	-9.72	Peak
233.70	H	52.48	-9.95	42.53	46.00	-3.47	QP
400.22	H	44.32	-6.06	38.27	46.00	-7.73	Peak
479.43	H	34.48	-4.70	29.77	46.00	-16.23	Peak
532.78	H	34.09	-3.25	30.84	46.00	-15.16	Peak
799.53	H	29.74	0.21	29.95	46.00	-16.05	Peak
959.58	H	29.97	2.17	32.15	46.00	-13.85	Peak

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** July 17, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1353.33	V	55.85	---	-7.30	48.55	---	74.00	54.00	-5.45	Peak
N/A										
2570.00	H	61.14	53.25	-1.28	59.86	51.97	74.00	54.00	-2.03	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** July 17, 2009**Temperature:** 25°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	59.33	---	-7.84	51.49	---	74.00	54.00	-2.51	Peak
4875.00	V	50.74	---	1.02	51.76	---	74.00	54.00	-2.24	Peak
7308.33	V	50.74	41.70	4.03	54.77	45.73	74.00	54.00	-8.27	AVG
N/A										
2600.00	H	59.17	52.23	-1.22	57.95	51.01	74.00	54.00	-2.99	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** July 17, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1446.67	V	56.09	---	-7.13	48.96	---	74.00	54.00	-5.04	Peak
4925.00	V	50.66	---	1.01	51.67	---	74.00	54.00	-2.33	Peak
7383.33	V	50.29	42.00	3.98	54.27	45.98	74.00	54.00	-8.02	AVG
N/A										
2616.67	H	58.90	51.86	-1.19	57.71	50.67	74.00	54.00	-3.33	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** July 17, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	59.52	---	-7.84	51.69	---	74.00	54.00	-2.31	Peak
N/A										
2573.33	H	58.25	47.57	-1.27	56.97	46.30	74.00	54.00	-7.70	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** July 18, 2009**Temperature:** 25°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1063.33	V	58.82	---	-7.84	50.98	---	74.00	54.00	-3.02	Peak
N/A										
2606.67	H	56.46	48.50	-1.21	55.25	47.29	74.00	54.00	-6.71	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** July 18, 2009**Temperature:** 23°C**Tested by:** Mimic Yang**Humidity:** 53 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	59.00	---	-7.84	51.17	---	74.00	54.00	-2.83	Peak
N/A										
2620.00	H	56.24	44.66	-1.18	55.06	43.48	74.00	54.00	-10.52	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: July 18, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	59.30	---	-7.84	51.46	---	74.00	54.00	-2.54	Peak
N/A										
2570.00	H	56.47	45.76	-1.28	55.19	44.48	74.00	54.00	-9.52	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: July 18, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1063.33	V	58.68	---	-7.84	50.83	---	74.00	54.00	-3.17	Peak
N/A										
1070.00	H	57.37	---	-7.83	49.54	---	74.00	54.00	-4.46	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: July 18, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	59.14	---	-7.84	51.30	---	74.00	54.00	-2.70	Peak
N/A										
2616.67	H	56.66	42.67	-1.19	55.47	41.48	74.00	54.00	-12.52	AVG
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Low

Test Date: July 17, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	58.67	---	-7.84	50.83	---	74.00	54.00	-3.17	Peak
N/A										
1063.33	H	58.14	---	-7.84	50.30	---	74.00	54.00	-3.70	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Mid

Test Date: July 17, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1063.33	V	59.06	---	-7.84	51.21	---	74.00	54.00	-2.79	Peak
N/A										
1063.33	H	59.22	---	-7.84	51.38	---	74.00	54.00	-2.62	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH High

Test Date: July 17, 2009

Temperature: 23°C

Tested by: Mimic Yang

Humidity: 53 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.67	V	58.75	---	-7.84	50.91	---	74.00	54.00	-3.09	Peak
N/A										
1066.67	H	57.86	---	-7.84	50.02	---	74.00	54.00	-3.98	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** RX / IEEE 802.11g / CH Mid**Test Date:** June 27, 2009**Temperature:** 25°C**Tested by:** Nan Tsai**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
3706.67	V	48.49	---	0.29	48.78	---	74.00	54.00	-5.22	Peak
N/A										
3123.33	H	48.19	---	-0.29	47.90	---	74.00	54.00	-6.10	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



8.9 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a) & RSS-Gen §7.2.2, except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** May 22, 2009
Temperature: 24°C **Tested by:** Webber Chung
Humidity: 59% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.151	48.81	---	0.07	48.88	---	65.96	---	-17.08	---	L1
0.203	54.52	33.09	0.06	54.58	33.15	63.49	53.49	-8.91	-20.34	L1
0.243	45.60	---	0.06	45.66	---	62.00	---	-16.34	---	L1
0.330	41.34	--	0.06	41.40	---	59.44	---	-18.04	---	L1
0.428	38.03	---	0.06	38.09	---	57.29	---	-19.19	---	L1
6.089	44.40	---	0.42	44.82	---	60.00	---	-15.18	---	L1
0.151	47.55	---	0.08	47.63	---	65.96	---	-18.33	---	L2
0.188	56.88	36.99	0.07	56.95	37.06	64.11	54.11	-7.16	-17.05	L2
0.247	49.89	---	0.07	49.96	---	61.86	---	-11.90	---	L2
0.317	42.32	---	0.07	42.39	---	59.80	---	-17.41	---	L2
0.449	37.61	---	0.08	37.61	---	56.89	---	-19.20	---	L2
6.024	44.76	---	0.34	45.10	---	60.00	---	-14.90	---	L2

Remark:


1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

Test Plots

Conducted emissions (Line 1)

Data#: 40 File#: 90519203CA.EMI

Date: 2009-05-22 Time: 13:41:15

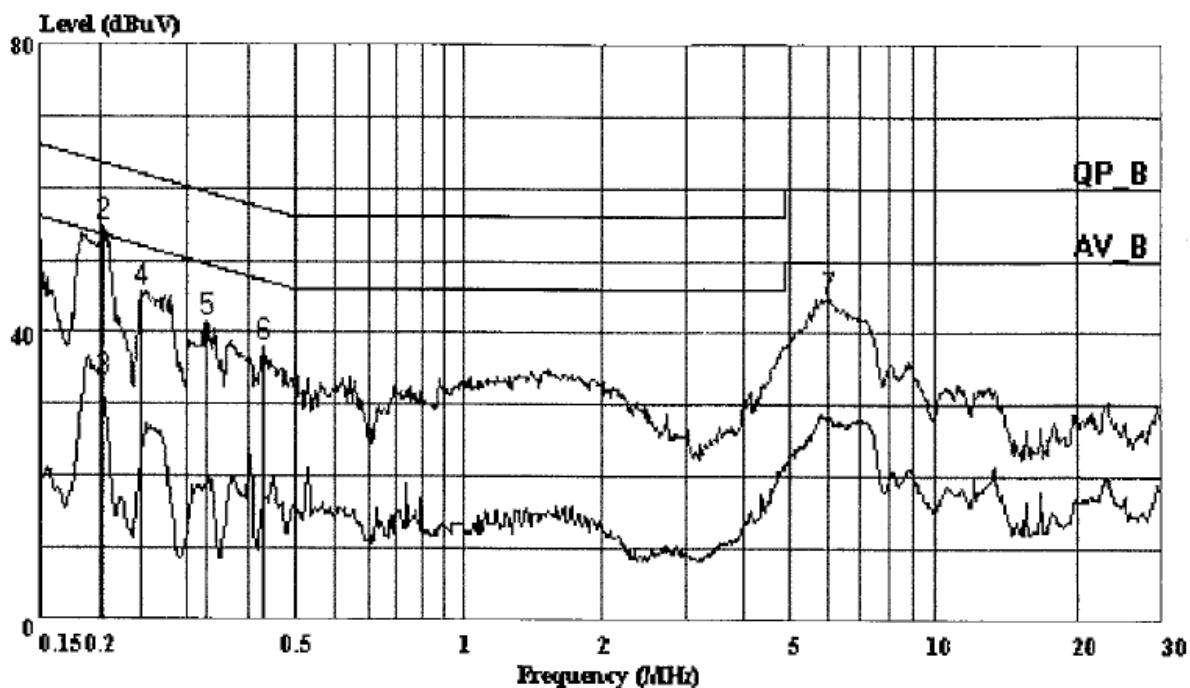

Conducted emissions (Line 2)

Data#: 35 File#: 90519203CA.EMI

Date: 2009-05-22 Time: 13:35:31

