



A D T

FCC TEST REPORT (15.407)

REPORT NO.: RF121015E01-1

MODEL NO.: WAP300N

FCC ID: Q87-WAP300N

RECEIVED: Oct. 15, 2012

TESTED: Oct. 16 to Nov. 07, 2012

ISSUED: Nov. 13, 2012

APPLICANT: Cisco Consumer Products, LLC

ADDRESS: 121 Theory Drive Irvine, CA 92617(USA)

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
3.4 DUTY CYCLE OF TEST SIGNAL	14
3.5 DESCRIPTION OF SUPPORT UNITS	15
3.6 CONFIGURATION OF SYSTEM UNDER TEST	15
4. TEST TYPES AND RESULTS	16
4.1 CONDUCTED EMISSION MEASUREMENT	16
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	16
4.1.2 TEST INSTRUMENTS	16
4.1.3 TEST PROCEDURES	17
4.1.4 DEVIATION FROM TEST STANDARD	17
4.1.5 TEST SETUP	18
4.1.6 EUT OPERATING CONDITIONS	18
4.1.7 TEST RESULTS (MODE 1)	19
4.1.8 TEST RESULTS (MODE 2)	21
4.1.9 TEST RESULTS (MODE 3)	23
4.1.10 TEST RESULTS (MODE 4)	25
4.1.11 TEST RESULTS (MODE 5)	27
4.2 RADIATED EMISSION AND BANDEdge MEASUREMENT	29
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEdge MEASUREMENT	29
4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	30
4.2.3 TEST INSTRUMENTS	31
4.2.4 TEST PROCEDURES	33
4.2.5 DEVIATION FROM TEST STANDARD	33
4.2.6 TEST SETUP	34
4.2.7 EUT OPERATING CONDITION	34
4.2.8 TEST RESULTS	35
4.3 PEAK TRANSMIT POWER MEASUREMENT	44
4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT	44
4.3.2 TEST INSTRUMENTS	44
4.3.3 TEST PROCEDURE	44



A D T

4.3.4	DEVIATION FROM TEST STANDARD	45
4.3.5	TEST SETUP	45
4.3.6	EUT OPERATING CONDITIONS	45
4.3.7	TEST RESULTS	46
4.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT	48
4.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	48
4.4.2	TEST INSTRUMENTS.....	48
4.4.3	TEST PROCEDURES	48
4.4.4	DEVIATION FROM TEST STANDARD	48
4.4.5	TEST SETUP	49
4.4.6	EUT OPERATING CONDITIONS	49
4.4.7	TEST RESULTS	50
4.5	PEAK POWER EXCURSION MEASUREMENT	51
4.5.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT.....	51
4.5.2	TEST INSTRUMENTS.....	51
4.5.3	TEST PROCEDURE.....	51
4.5.4	DEVIATION FROM TEST STANDARD	51
4.5.5	TEST SETUP	51
4.5.6	EUT OPERATING CONDITIONS	51
4.5.7	TEST RESULTS	52
4.6	FREQUENCY STABILITY.....	55
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	55
4.6.2	TEST INSTRUMENTS.....	55
4.6.3	TEST PROCEDURE.....	55
4.6.4	DEVIATION FROM TEST STANDARD	56
4.6.5	TEST SETUP	56
4.6.6	EUT OPERATING CONDITION.....	56
4.6.7	TEST RESULTS	57
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	58
6.	INFORMATION ON THE TESTING LABORATORIES	59
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	60



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF121015E01-1	Original release	Nov. 13, 2012



A D T

1. CERTIFICATION

PRODUCT: Selectable Dual-Band Wireless-N Access Point

BRAND NAME: Cisco

MODEL NO.: WAP300N

TEST SAMPLE: ENGINEERING SAMPLE

APPLICANT: Cisco Consumer Products, LLC

TESTED: Oct. 16 to Nov. 07, 2012

STANDARDS: FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10-2009

The above equipment (Model: WAP300N) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Lori Chung, **DATE:** Nov. 13, 2012
(Lori Chung, Specialist)

APPROVED BY : May Chen, **DATE:** Nov. 13, 2012
(May Chen, Deputy Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 5GHz, 5180~5240MHz

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -7.75dB at 0.30234MHz
15.407(b/1/2/3)(b)(6)	Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.5dB at 15600.00MHz & 5150.00MHz
15.407(a/1/2)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is R-SMA not a standard connector.

NOTE: The EUT was operating in 2.400 ~ 2.4835GHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 5.15~5.25GHz. For the 2.400 ~ 2.4835GHz and 5.725~5.850GHz RF parameters was recorded in another test report.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.59 dB
Radiated emissions (1GHz -6GHz)	3.84 dB
Radiated emissions (6GHz -18GHz)	4.09 dB
Radiated emissions (18GHz -40GHz)	4.24 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Selectable Dual-Band Wireless-N Access Point
MODEL NO.	WAP300N
POWER SUPPLY	DC 12V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps
OPERATING FREQUENCY	For 15.407 5.18 ~ 5.24GHz For 15.247 2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	For 15.407 4 for 802.11a, 802.11n (HT20) 2 for 802.11n (HT40) For 15.247 (2.4GHz) 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40) For 15.247 (5GHz) 5 for 802.11a, 802.11n (HT20) 2 for 802.11n (HT40)
MAXIMUM OUTPUT POWER	For 15.407 802.11a: 42.658mW 802.11n (HT20): 42.862mW 802.11n (HT40): 44.265mW For 15.247 (2.4GHz) 802.11b: 100.000mW 802.11g: 199.526mW 802.11n (HT20): 420.632mW 802.11n (HT40): 296.136mW For 15.247 (5GHz) 802.11a: 134.896mW 802.11n (HT20): 235.229mW 802.11n (HT40): 229.874mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	LAN cable (unshielded, 1.5m) x 1
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter x 1



A D T

NOTE:

1. There are 2.4GHz and 5GHz WLAN technology used for the EUT. The test report of EUT listed as below table:

Function	Report No.
WLAN	RF121015E01 (15.247)
	RF121015E01-1(15.407)

2. The EUT must be supplied with power adapter and following eight different models could be chosen as following table:

No	Brand	Model No.	Spec.
1	HON-KWANG	HK-Q106-A12	Input: 100-240V, 0.2A, 50/60Hz Output: 12V, 0.5A
2	HON-KWANG	HK-Q906-A12	DC output cable: unshielded, 1.5m
3	HON-KWANG	HK-U-120A050-CP	Input: 100-240V, 0.5A, 50-60Hz Output: 12V, 0.5A
4	SOLYTECH	CAD0612C	DC output cable: unshielded, 1.5m
5	SOLYTECH	CAD0612M	Input: 100-240V, 0.5A, 50-60Hz Output: 12V, 0.5A
6	SOLYTECH	CAD0612L	DC output cable: unshielded, 1.5m
7	HON-KWANG	HK-Q1006-A12	Input: 100-240V, 0.2A, 50/60Hz Output: 12V, 0.5A DC output cable: unshielded, 1.5m
8	SOLYTECH	CAD0612J	Input: 100-240V, 0.5A, 50-60Hz Output: 12V, 0.5A DC output cable: unshielded, 1.5m

Note:

1. The adapter 2 is as same as adapter 1, except for plug shape.
2. The adapters 5 & 6 are as same as adapter 4, except for plug shape.
3. For radiated test, the EUT was pre-tested with adapter 1, 3, 4, 7, 8 the worse case was found in adapter 4. Therefore only the test data of the adapter was recorded in the test report.

3. The antenna provided to the EUT, please refer to the following table:

Antenna Type	Gain (dBi) (Include cable loss)	Connector type	Frequency range (MHz to MHz)
Dipole	3.5	R-SMA	2400-2500 5150-5850

4. The EUT incorporates a MIMO function.

MODULATION MODE	Tx/Rx FUNCTION
802.11b	1Tx/2Rx
802.11g	1Tx/2Rx
802.11a	1Tx/2Rx
802.11n (HT20)	2Tx/2Rx
802.11n (HT40)	2Tx/2Rx

5. 2.4GHz and 5GHz technology cannot transmit at same time.
6. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.
7. For more detailed product features, please refer to manufacturer's specification or user's manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Operated in 5180 ~ 5240MHz band:

4 channels are provided for 802.11a, 802.11n (HT20):

CHANNEL	FREQUENCY
36	5180 MHz
40	5200 MHz
44	5220 MHz
48	5240 MHz

2 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY
38	5190 MHz
46	5230 MHz



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
1	√	√	√	√	Adapter 4
2	√	-	-	-	Adapter 1
3	√	-	-	-	Adapter 3
4	√	-	-	-	Adapter 7
5	√	-	-	-	Adapter 8

Where **PLC**: Power Line Conducted Emission**RE < 1G**: Radiated Emission below 1GHz**RE ≥ 1G**: Radiated Emission above 1GHz**APCM**: Antenna Port Conducted Measurement

NOTE: 1. "-" means no effect.

2. The EUT had been pre-tested on the positioned of each 2 axis. The radiated emission worst case was found when positioned on X-plane

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (MBPS)
802.11n (HT20)	36 to 48	48	OFDM	BPSK	6.5

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	36 to 48	48	OFDM	BPSK	6.5



A D T

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11n (HT20)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11n (HT40)	36 to 48	38, 46	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11n (HT20)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11n (HT40)	36 to 48	38, 46	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	26deg. C, 57%RH 25deg. C, 60%RH	120Vac, 60Hz	Mike Hsieh Timmy Hu
RE<1G	24deg. C, 68%RH	120Vac, 60Hz	Robert Cheng
RE ³ 1G	25deg. C, 68%RH	120Vac, 60Hz	Robert Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Nelson Teng



A D T

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D01 General UNII Test Procedures

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T


3.4 Duty cycle of test signal

Duty cycle of test signal is > 98 %, duty factor is not required.

802.11a: Duty cycle = 1.439 ms/1.45 ms = 0.992

802.11n (HT20): Duty cycle = 1.347 ms/1.355 ms = 0.994

802.11n (HT40): Duty cycle = 667.5 us/674.6875 us = 0.989

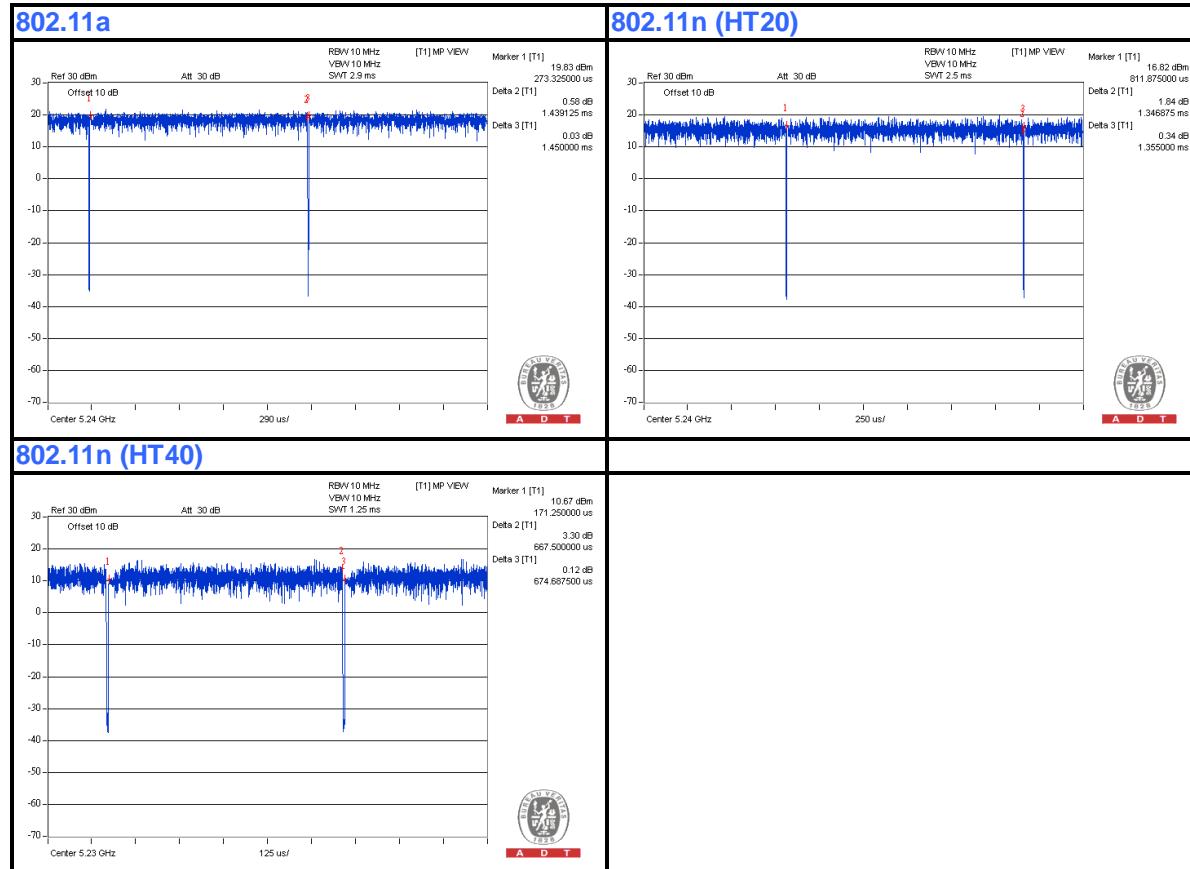



A D T

3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable (10m)

NOTE: All power cords of the above support units are non shielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

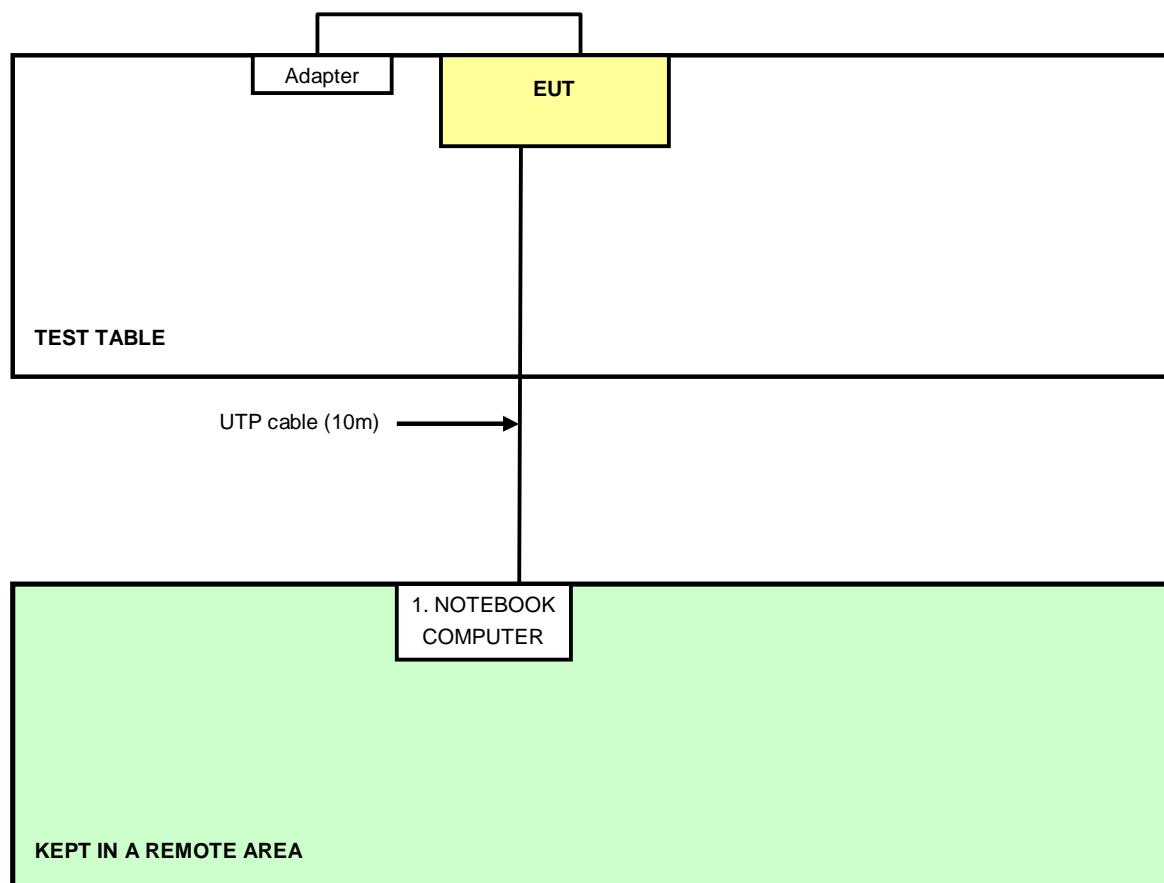



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 12, 2012	Mar.11, 2013
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 06, 2012	Sep. 05, 2013
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100072	June 08,2012	June 07,2013
RF Cable (JYEBAO)	5DFB	COCCAB-001	Aug. 28, 2012	Aug. 27, 2013
50 ohms Terminator	50	EMC-3	Sep. 25, 2012	Sep. 24, 2013
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Oct. 16 to Nov. 07, 2012



A D T

4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. At least the disturbance levels and the frequencies of six highest disturbances from each mains port were recorded.

Note: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

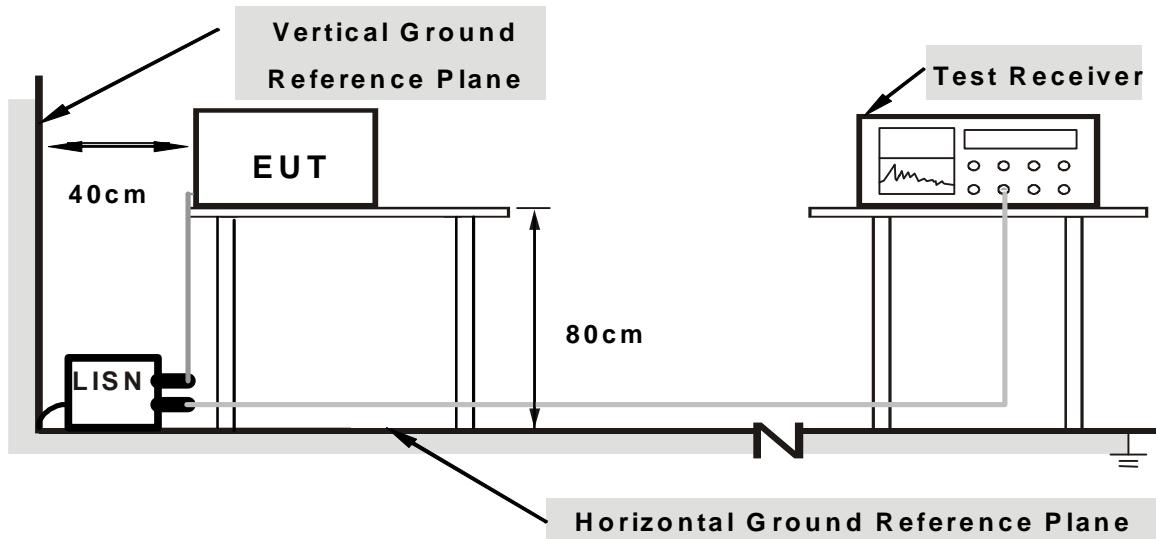

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Turn on the power of EUT.
2. The communication partner run test program “RT5x9xQA.exe” to enable EUT under transmission/receiving condition continuously at specific channel frequency.



A D T


4.1.7 TEST RESULTS (MODE 1)

PHASE	Line (L)	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak (QP) / Average (AV), 9 kHz
-------	----------	-------------------------------------	---

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16558	0.11	48.61	30.07	48.72	30.18	65.18	55.18	-16.46	-25.00
2	0.20092	0.12	50.02	41.42	50.14	41.54	63.57	53.57	-13.43	-12.03
3	0.33353	0.15	43.17	27.38	43.32	27.53	59.36	49.36	-16.05	-21.84
4	0.72878	0.18	32.64	22.56	32.82	22.74	56.00	46.00	-23.18	-23.26
5	11.89082	0.63	28.53	22.57	29.16	23.20	60.00	50.00	-30.84	-26.80
6	23.12881	1.01	32.39	25.63	33.40	26.64	60.00	50.00	-26.60	-23.36

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

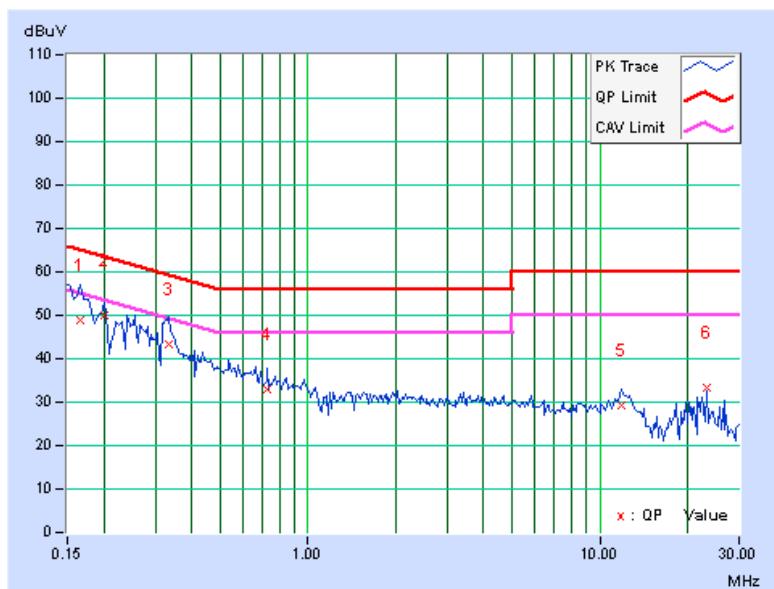




A D T

PHASE	Neutral (N)	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak (QP) / Average (AV), 9 kHz
-------	-------------	-------------------------------------	---

No	Freq. [MHz]	Corr. (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16572	0.09	46.62	28.93	46.71	29.02	65.17	55.17	-18.46	-26.15
2	0.23238	0.11	40.38	23.67	40.49	23.78	62.36	52.36	-21.88	-28.59
3	0.34946	0.14	42.53	31.84	42.67	31.98	58.98	48.98	-16.31	-17.00
4	3.34777	0.23	26.59	17.57	26.82	17.80	56.00	46.00	-29.18	-28.20
5	12.19561	0.46	24.56	16.83	25.02	17.29	60.00	50.00	-34.98	-32.71
6	23.12879	0.68	28.03	21.53	28.71	22.21	60.00	50.00	-31.29	-27.79

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

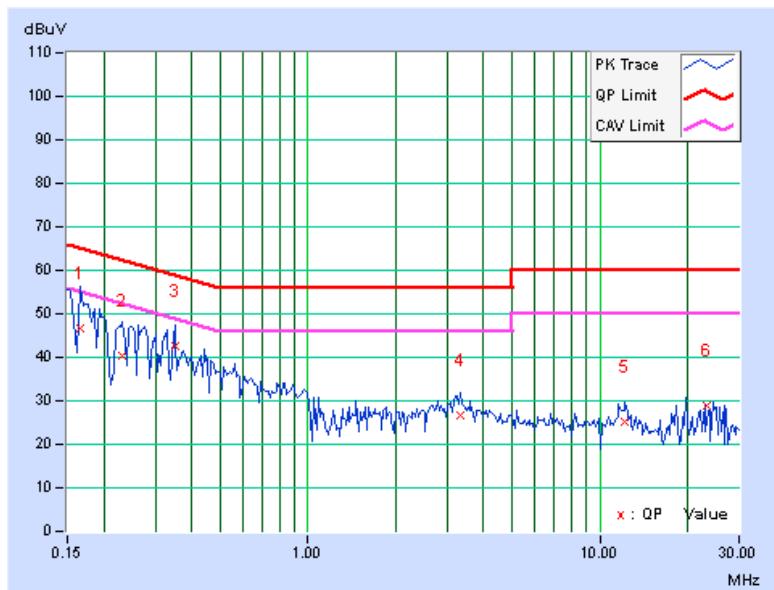



A D T


4.1.8 TEST RESULTS (MODE 2)

PHASE	Line (L)	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak (QP) / Average (AV), 9 kHz
-------	----------	-------------------------------------	---

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15023	0.11	33.53	27.01	33.64	27.12	65.99	55.99	-32.35	-28.87
2	0.36875	0.15	38.41	33.07	38.56	33.22	58.53	48.53	-19.97	-15.31
3	0.45078	0.16	42.52	34.45	42.68	34.61	56.86	46.86	-14.18	-12.25
4	0.88828	0.18	30.47	23.28	30.65	23.46	56.00	46.00	-25.35	-22.54
5	1.32031	0.20	32.01	25.17	32.21	25.37	56.00	46.00	-23.79	-20.63
6	8.71484	0.50	32.97	26.67	33.47	27.17	60.00	50.00	-26.53	-22.83

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

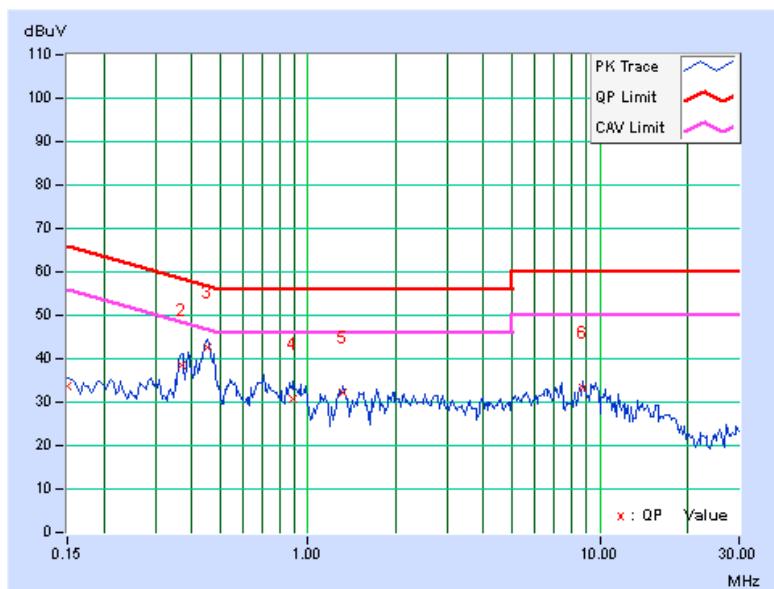




A D T

PHASE	Neutral (N)	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak (QP) / Average (AV), 9 kHz
-------	-------------	-------------------------------------	---

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	Q.P.	AV.	Q.P.
1	0.21249	0.10	32.47	21.38	32.57	21.48	63.11	53.11	-30.53	-31.62
2	0.38838	0.15	37.63	32.51	37.78	32.66	58.10	48.10	-20.32	-15.44
3	0.87276	0.17	28.03	20.36	28.20	20.53	56.00	46.00	-27.80	-25.47
4	1.98444	0.21	28.32	20.12	28.53	20.33	56.00	46.00	-27.47	-25.67
5	8.71878	0.38	32.51	24.44	32.89	24.82	60.00	50.00	-27.11	-25.18
6	17.37888	0.56	21.88	14.38	22.44	14.94	60.00	50.00	-37.56	-35.06

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

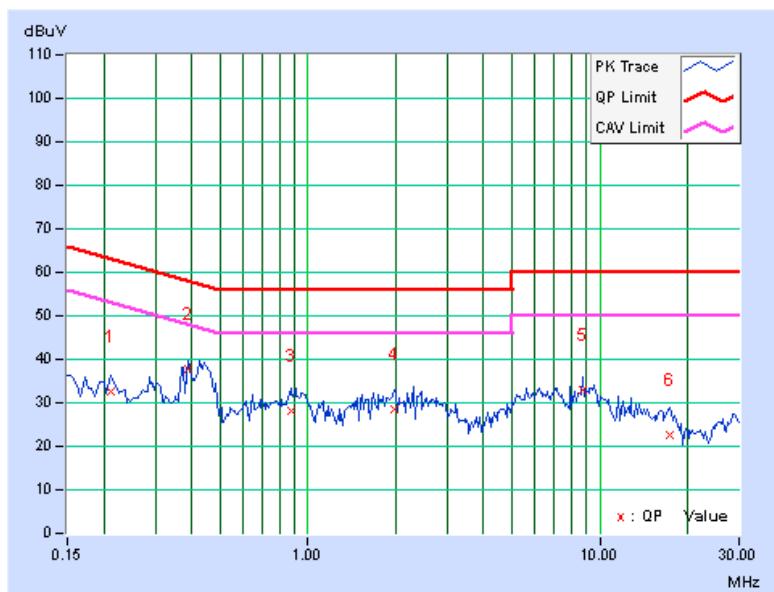



A D T


4.1.9 TEST RESULTS (MODE 3)

PHASE	Line (L)	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak (QP) / Average (AV), 9 kHz
-------	----------	-------------------------------------	---

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19672	0.12	39.48	33.88	39.60	34.00	63.75	53.75	-24.15	-19.75
2	0.32987	0.15	41.27	34.68	41.42	34.83	59.45	49.45	-18.04	-14.63
3	0.39231	0.16	41.33	35.07	41.49	35.23	58.01	48.01	-16.53	-12.79
4	1.73068	0.22	34.63	23.07	34.85	23.29	56.00	46.00	-21.15	-22.71
5	2.61742	0.24	33.73	20.11	33.97	20.35	56.00	46.00	-22.03	-25.65
6	23.12892	1.01	34.12	26.36	35.13	27.37	60.00	50.00	-24.87	-22.63

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

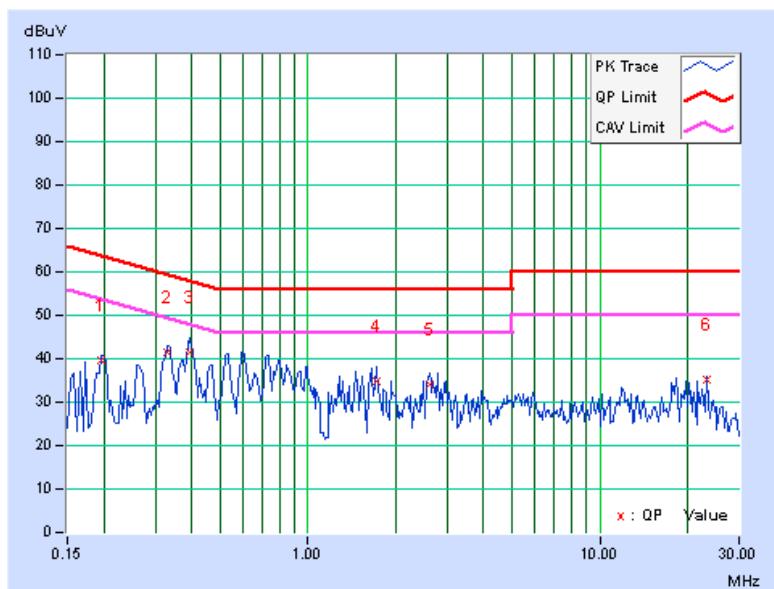




A D T

PHASE	Neutral (N)	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak (QP) / Average (AV), 9 kHz
-------	-------------	-------------------------------------	---

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	
1	0.20073	0.10	37.53	25.48	37.63	25.58	63.58	53.58	-25.95	-28.00
2	0.32191	0.13	40.38	28.73	40.51	28.86	59.66	49.66	-19.15	-20.80
3	0.39238	0.15	40.38	30.42	40.53	30.57	58.01	48.01	-17.49	-17.45
4	0.84548	0.16	34.12	20.55	34.28	20.71	56.00	46.00	-21.72	-25.29
5	1.76953	0.20	32.12	12.47	32.32	12.67	56.00	46.00	-23.68	-33.33
6	18.24242	0.57	34.42	27.37	34.99	27.94	60.00	50.00	-25.01	-22.06

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

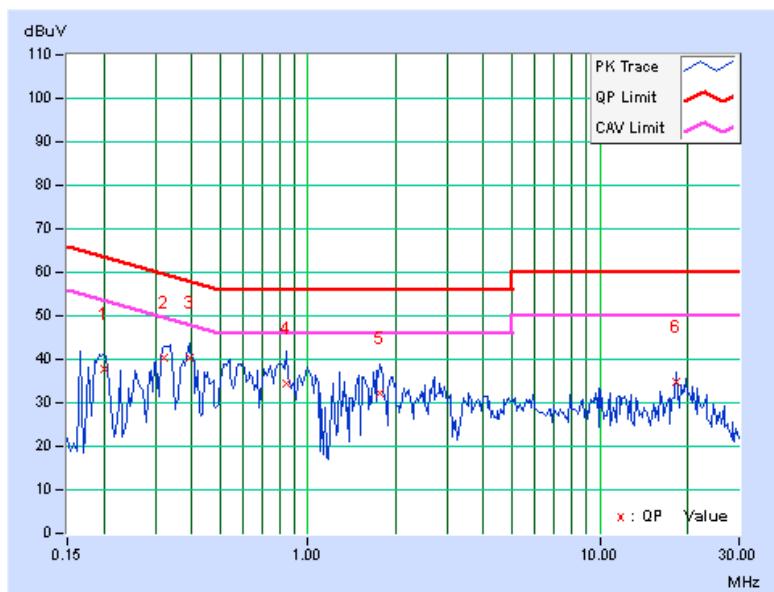



A D T


4.1.10 TEST RESULTS (MODE 4)

PHASE	Line (L)	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak (QP) / Average (AV), 9 kHz
-------	----------	-------------------------------------	---

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.34922	0.17	44.18	35.62	44.35	35.79	58.98	48.98	-14.63	-13.19
2	0.42344	0.18	45.54	35.72	45.72	35.90	57.38	47.38	-11.66	-11.48
3	0.56797	0.19	45.04	34.40	45.23	34.59	56.00	46.00	-10.77	-11.41
4	0.64219	0.20	43.28	31.60	43.48	31.80	56.00	46.00	-12.52	-14.20
5	0.85313	0.21	44.18	31.06	44.39	31.27	56.00	46.00	-11.61	-14.73
6	16.23047	1.10	43.28	38.28	44.38	39.38	60.00	50.00	-15.62	-10.62

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

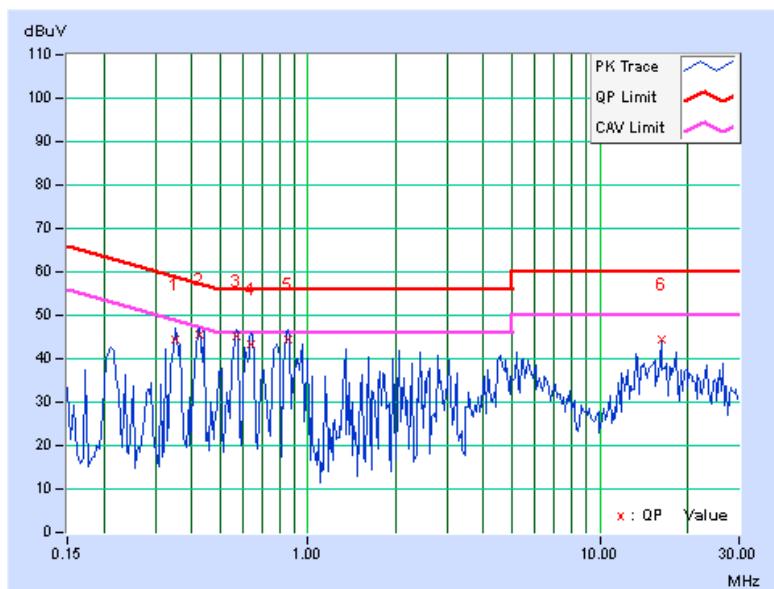




A D T

PHASE	Neutral (N)	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak (QP) / Average (AV), 9 kHz
-------	-------------	-------------------------------------	---

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	Q.P.	AV.	Q.P.
1	0.34922	0.16	38.20	32.36	38.36	32.52	58.98	48.98	-20.62	-16.46
2	0.41563	0.17	38.86	30.16	39.03	30.33	57.54	47.54	-18.50	-17.20
3	0.55234	0.18	37.46	26.56	37.64	26.74	56.00	46.00	-18.36	-19.26
4	0.62656	0.18	35.68	26.52	35.86	26.70	56.00	46.00	-20.14	-19.30
5	0.82969	0.19	36.90	25.26	37.09	25.45	56.00	46.00	-18.91	-20.55
6	5.23438	0.41	34.04	24.40	34.45	24.81	60.00	50.00	-25.55	-25.19

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

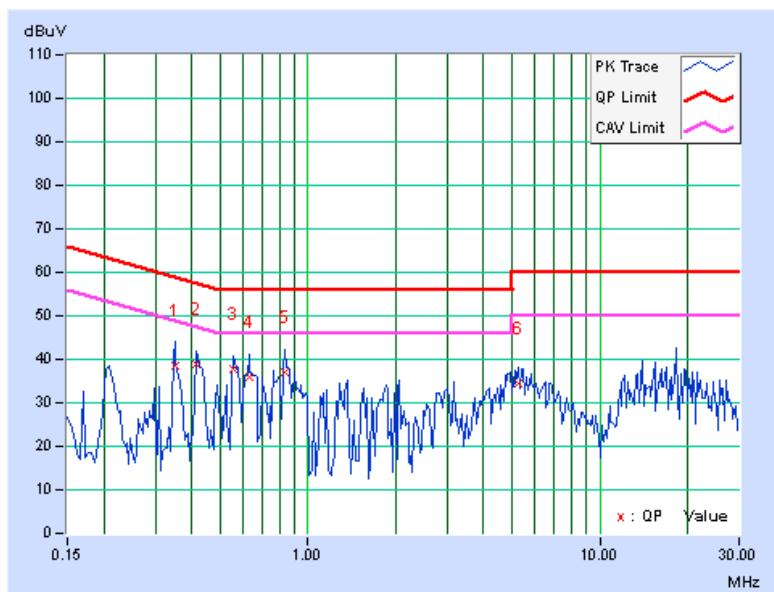


4.1.11 TEST RESULTS (MODE 5)

PHASE	Line (L)	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak (QP) / Average (AV), 9 kHz
-------	----------	-------------------------------------	---

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.15391	0.11	48.32	40.90	48.43	41.01	65.79	55.79	-17.36	-14.78
2	0.19297	0.13	44.94	36.28	45.07	36.41	63.91	53.91	-18.84	-17.50
3	0.24375	0.14	43.12	29.98	43.26	30.12	61.97	51.97	-18.71	-21.85
4	0.30234	0.16	47.02	38.94	47.18	39.10	60.18	50.18	-13.00	-11.08
5	0.57969	0.19	35.24	26.64	35.43	26.83	56.00	46.00	-20.57	-19.17
6	3.39453	0.32	36.66	26.58	36.98	26.90	56.00	46.00	-19.02	-19.10

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

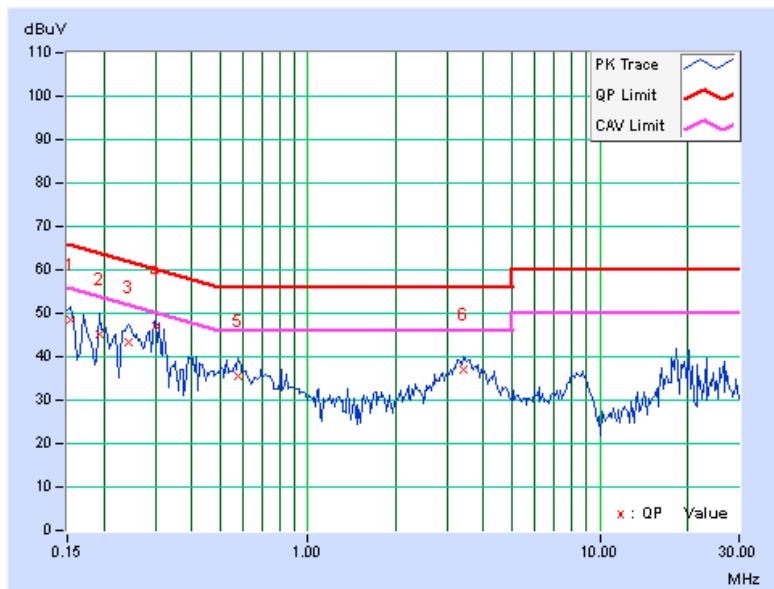




A D T

PHASE	Neutral (N)	DETECTOR FUNCTION & BANDWIDTH	Quasi-Peak (QP) / Average (AV), 9 kHz
-------	-------------	-------------------------------------	---

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor (dB)	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	
1	0.15391	0.10	47.28	40.28	47.38	40.38	65.79	55.79	-18.41	-15.41
2	0.23984	0.13	44.62	38.20	44.75	38.33	62.10	52.10	-17.35	-13.77
3	0.25938	0.13	44.72	39.26	44.85	39.39	61.45	51.45	-16.60	-12.06
4	0.30234	0.15	47.48	42.28	47.63	42.43	60.18	50.18	-12.55	-7.75
5	0.39609	0.17	36.02	26.26	36.19	26.43	57.93	47.93	-21.75	-21.51
6	8.24219	0.57	29.42	20.64	29.99	21.21	60.00	50.00	-30.01	-28.79

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

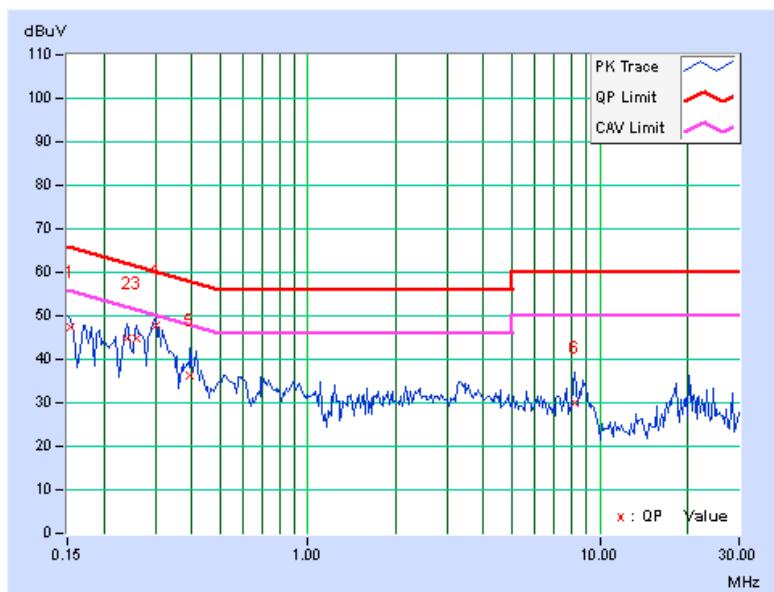



4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m) *Note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27 *Note 1	68.3
	-17 *Note 2	78.3

Notes:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$



A D T

4.2.3 TEST INSTRUMENTS

For below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250254	July 09, 2012	July 08, 2013
Pre-Selector Agilent	N9039A	MY46520311	July 09, 2012	July 08, 2013
Signal Generator Agilent	N5181A	MY49060517	July 09, 2012	July 08, 2013
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Pre-Amplifier Agilent	8449B	3008A02578	June 26, 2012	June 25, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 06, 2012	Oct. 05, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Oct. 19, 2012



A D T

For above 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
Pre-Selector Agilent	N9039A	MY46520310	Sep. 03, 2012	Sep. 02, 2013
Signal Generator Agilent	N5181A	MY49060347	July 24, 2012	July 23, 2013
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 15, 2011	Nov. 14, 2012
Pre-Amplifier Agilent	8449B	3008A02465	Feb. 27, 2012	Feb. 26, 2013
SPACEK LABS	SLKKA-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Apr. 06, 2012	Apr. 05, 2013
Horn_Antenna AISI	AIH.8018	0000220091110	Nov. 23, 2011	Nov. 22, 2012
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 27, 2011	Dec. 26, 2012
RF Cable	NA	CHHCAB_001	Oct. 06, 2012	Oct. 05, 2013
Software	ADT_Radiated_V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: Oct. 24, 2012



A D T

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

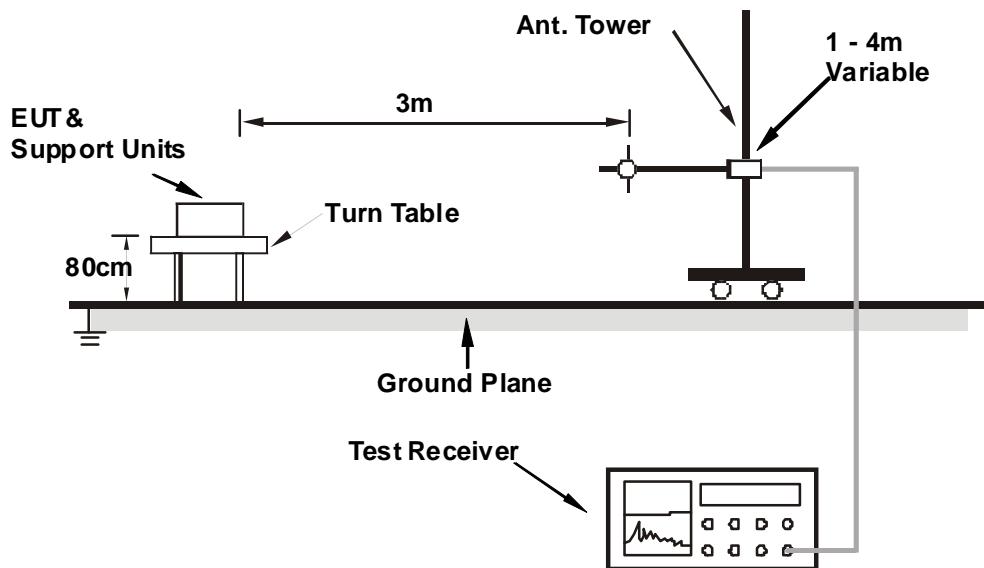

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6



A D T

4.2.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11n (HT20)

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	60.20	26.0 QP	40.0	-14.0	1.00 H	36	12.36	13.63
2	174.71	31.7 QP	43.5	-11.8	1.50 H	101	18.25	13.42
3	250.03	34.2 QP	46.0	-11.8	1.00 H	319	20.86	13.35
4	374.97	32.0 QP	46.0	-14.0	1.00 H	323	14.75	17.22
5	750.01	38.3 QP	46.0	-7.7	1.00 H	325	13.40	24.91
6	933.33	31.5 QP	46.0	-14.5	1.50 H	227	3.74	27.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	66.20	35.1 QP	40.0	-4.9	1.50 V	0	22.06	13.02
2	94.10	29.6 QP	43.5	-13.9	1.50 V	229	20.46	9.12
3	250.02	33.5 QP	46.0	-12.5	1.00 V	147	20.11	13.35
4	499.00	31.7 QP	46.0	-14.3	2.00 V	360	11.36	20.36
5	750.00	31.3 QP	46.0	-14.7	2.00 V	360	6.43	24.91
6	933.30	33.3 QP	46.0	-12.7	1.50 V	0	5.49	27.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.3 PK	74.0	-12.7	1.00 H	198	19.00	42.30
2	5150.00	49.0 AV	54.0	-5.0	1.00 H	198	6.70	42.30
3	*5180.00	100.5 PK			1.00 H	198	58.10	42.40
4	*5180.00	91.2 AV			1.00 H	198	48.80	42.40
5	#10360.00	56.6 PK	68.3	-11.7	1.17 H	272	7.39	49.21
6	15540.00	63.2 PK	74.0	-10.8	1.31 H	144	8.10	55.10
7	15540.00	49.5 AV	54.0	-4.5	1.31 H	144	-5.60	55.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.2 PK	74.0	-8.8	1.38 V	150	22.90	42.30
2	5150.00	53.2 AV	54.0	-0.8	1.38 V	150	10.90	42.30
3	*5180.00	107.7 PK			1.38 V	150	65.30	42.40
4	*5180.00	97.9 AV			1.38 V	150	55.50	42.40
5	#10360.00	64.7 PK	68.3	-3.6	1.50 V	64	15.49	49.21
6	15540.00	64.1 PK	74.0	-9.9	1.37 V	120	9.00	55.10
7	15540.00	51.1 AV	54.0	-2.9	1.37 V	120	-4.00	55.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	99.9 PK			1.00 H	174	57.43	42.47
2	*5200.00	90.5 AV			1.00 H	174	48.03	42.47
3	#10400.00	56.3 PK	68.3	-12.0	1.11 H	273	7.47	48.83
4	15600.00	63.3 PK	74.0	-10.7	1.29 H	130	8.33	54.97
5	15600.00	49.9 AV	54.0	-4.1	1.29 H	130	-5.07	54.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	106.8 PK			1.35 V	152	64.33	42.47
2	*5200.00	97.1 AV			1.35 V	152	54.63	42.47
3	#10400.00	65.0 PK	68.3	-3.3	1.44 V	49	16.17	48.83
4	15600.00	63.7 PK	74.0	-10.3	1.32 V	110	8.73	54.97
5	15600.00	50.6 AV	54.0	-3.4	1.32 V	110	-4.37	54.97

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	100.1 PK			1.02 H	167	57.59	42.51
2	*5240.00	90.1 AV			1.02 H	167	47.59	42.51
3	5350.00	59.3 PK	74.0	-14.7	1.02 H	197	16.71	42.59
4	5350.00	48.1 AV	54.0	-5.9	1.02 H	197	5.51	42.59
5	#10480.00	56.3 PK	68.3	-12.0	1.08 H	263	6.91	49.39
6	15720.00	63.3 PK	74.0	-10.7	1.27 H	117	8.60	54.70
7	15720.00	49.8 AV	54.0	-4.2	1.27 H	117	-4.90	54.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	106.1 PK			1.37 V	144	63.59	42.51
2	*5240.00	96.1 AV			1.37 V	144	53.59	42.51
3	5350.00	59.5 PK	74.0	-14.5	1.02 V	185	16.91	42.59
4	5350.00	48.2 AV	54.0	-5.8	1.02 V	185	5.61	42.59
5	#10480.00	64.6 PK	68.3	-3.7	1.41 V	62	15.21	49.39
6	15720.00	63.8 PK	74.0	-10.2	1.35 V	121	9.10	54.70
7	15720.00	50.8 AV	54.0	-3.2	1.35 V	121	-3.90	54.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.0 PK	74.0	-15.0	1.03 H	193	16.70	42.30
2	5150.00	47.7 AV	54.0	-6.3	1.03 H	193	5.40	42.30
3	*5180.00	101.2 PK			1.04 H	173	58.80	42.40
4	*5180.00	91.1 AV			1.04 H	173	48.70	42.40
5	#10360.00	55.7 PK	68.3	-12.6	1.06 H	274	6.49	49.21
6	15540.00	63.8 PK	74.0	-10.2	1.28 H	125	8.70	55.10
7	15540.00	50.1 AV	54.0	-3.9	1.28 H	125	-5.00	55.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.7 PK	74.0	-6.3	1.54 V	156	25.40	42.30
2	5150.00	53.0 AV	54.0	-1.0	1.54 V	156	10.70	42.30
3	*5180.00	108.5 PK			1.54 V	156	66.10	42.40
4	*5180.00	98.8 AV			1.54 V	156	56.40	42.40
5	#10360.00	64.6 PK	68.3	-3.7	1.36 V	64	15.39	49.21
6	15540.00	64.4 PK	74.0	-9.6	1.35 V	114	9.30	55.10
7	15540.00	53.4 AV	54.0	-0.6	1.35 V	114	-1.70	55.10

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	101.8 PK			1.00 H	174	59.33	42.47
2	*5200.00	91.8 AV			1.00 H	174	49.33	42.47
3	#10400.00	55.8 PK	68.3	-12.5	1.00 H	261	6.97	48.83
4	15600.00	63.5 PK	74.0	-10.5	1.25 H	141	8.53	54.97
5	15600.00	49.7 AV	54.0	-4.3	1.25 H	141	-5.27	54.97
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	111.1 PK			1.52 V	150	68.63	42.47
2	*5200.00	101.2 AV			1.52 V	150	58.73	42.47
3	#10400.00	64.1 PK	68.3	-4.2	1.31 V	75	15.27	48.83
4	15600.00	64.5 PK	74.0	-9.5	1.38 V	106	9.53	54.97
5	15600.00	53.5 AV	54.0	-0.5	1.38 V	106	-1.47	54.97

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	101.7 PK			1.00 H	186	59.19	42.51
2	*5240.00	91.6 AV			1.00 H	186	49.09	42.51
3	5350.00	59.4 PK	74.0	-14.6	1.00 H	186	16.81	42.59
4	5350.00	48.1 AV	54.0	-5.9	1.00 H	186	5.51	42.59
5	#10480.00	55.6 PK	68.3	-12.7	1.00 H	270	6.21	49.39
6	15720.00	63.9 PK	74.0	-10.1	1.28 H	132	9.20	54.70
7	15720.00	50.0 AV	54.0	-4.0	1.28 H	132	-4.70	54.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	111.2 PK			1.55 V	144	68.69	42.51
2	*5240.00	101.3 AV			1.55 V	144	58.79	42.51
3	5350.00	63.8 PK	74.0	-10.2	1.24 V	149	21.21	42.59
4	5350.00	51.2 AV	54.0	-2.8	1.24 V	149	8.61	42.59
5	#10480.00	59.5 PK	68.3	-8.8	1.08 V	184	10.11	49.39
6	15720.00	64.8 PK	74.0	-9.2	1.22 V	50	10.10	54.70
7	15720.00	53.3 AV	54.0	-0.7	1.22 V	50	-1.40	54.70

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.0 PK	74.0	-15.0	1.00 H	195	16.70	42.30
2	5150.00	47.8 AV	54.0	-6.2	1.00 H	195	5.50	42.30
3	*5190.00	91.9 PK			1.00 H	195	49.46	42.44
4	*5190.00	82.2 AV			1.00 H	195	39.76	42.44
5	#10380.00	64.6 PK	68.3	-3.7	1.40 H	51	15.58	49.02
6	15570.00	64.0 PK	74.0	-10.0	1.34 H	133	8.96	55.04
7	15570.00	49.8 AV	54.0	-4.2	1.34 H	133	-5.24	55.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.6 PK	74.0	-7.4	1.39 V	156	24.30	42.30
2	5150.00	53.5 AV	54.0	-0.5	1.39 V	156	11.20	42.30
3	*5190.00	100.9 PK			1.39 V	156	58.46	42.44
4	*5190.00	92.2 AV			1.39 V	156	49.76	42.44
5	#10380.00	64.3 PK	68.3	-4.0	1.37 V	51	15.28	49.02
6	15570.00	64.0 PK	74.0	-10.0	1.32 V	120	8.96	55.04
7	15570.00	50.2 AV	54.0	-3.8	1.32 V	120	-4.84	55.04

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	101.5 PK			1.00 H	195	59.00	42.50
2	*5230.00	92.4 AV			1.00 H	195	49.90	42.50
3	5350.00	58.0 PK	74.0	-16.0	1.00 H	195	15.41	42.59
4	5350.00	47.5 AV	54.0	-6.5	1.00 H	195	4.91	42.59
5	#10460.00	64.3 PK	68.3	-4.0	1.41 H	51	15.05	49.25
6	15690.00	64.4 PK	74.0	-9.6	1.31 H	131	9.73	54.67
7	15690.00	50.3 AV	54.0	-3.7	1.31 H	131	-4.37	54.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	109.1 PK			1.37 V	145	66.60	42.50
2	*5230.00	100.0 AV			1.37 V	145	57.50	42.50
3	5350.00	65.5 PK	74.0	-8.5	1.26 V	147	22.91	42.59
4	5350.00	53.0 AV	54.0	-1.0	1.26 V	147	10.41	42.59
5	#10460.00	64.5 PK	68.3	-3.8	1.38 V	45	15.25	49.25
6	15690.00	64.4 PK	74.0	-9.6	1.34 V	118	9.73	54.67
7	15690.00	50.2 AV	54.0	-3.8	1.34 V	118	-4.47	54.67

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.47 – 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

FOR POWER OUTPUT MEASUREMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 10, 2012	May 09, 2013
Average Power Sensor	MA2411B	0738172	May 10, 2012	May 09, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Oct. 30, 2012

FOR 26dB OCCUPIED BANDWIDTH

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer	E4446A	MY48250254	July 09, 2012	July 08, 2013

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Oct. 26, 2012

4.3.3 TEST PROCEDURE

FOR AVERAGE POWER MEASUREMENT

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.



FOR 26dB OCCUPIED BANDWIDTH


- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.4 DEVIATION FROM TEST STANDARD


No deviation

4.3.5 TEST SETUP

FOR POWER OUTPUT MEASUREMENT

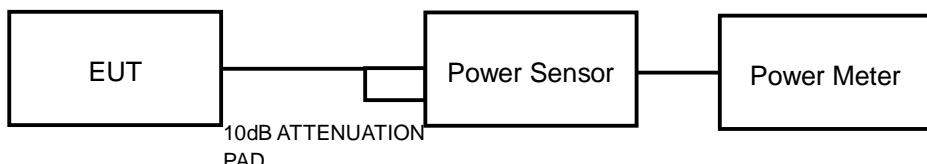

FOR 26dB OCCUPIED BANDWIDTH

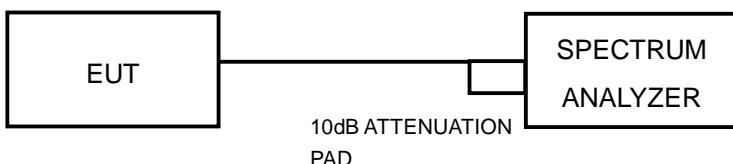

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

4.3.7 TEST RESULTS

POWER OUTPUT: 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	41.687	16.2	17	PASS
40	5200	42.658	16.3	17	PASS
48	5240	42.658	16.3	17	PASS

802.11n (HT20)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	13.1	13.5	42.804	16.31	17	PASS
40	5200	13.0	13.6	42.862	16.32	17	PASS
48	5240	13.2	13.4	42.771	16.31	17	PASS

802.11n (HT40)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	9.1	8.6	15.372	11.87	17	PASS
46	5230	13.4	13.5	44.265	16.46	17	PASS



A D T

26dB BANDWIDTH:

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)
36	5180	30.06
40	5200	31.34
48	5240	27.35

802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
36	5180	23.59	19.48
40	5200	19.79	19.38
48	5240	20.34	19.22

802.11n (HT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
38	5190	41.12	41.01
46	5230	71.90	75.70



4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.47 – 5.725GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Oct. 30, 2012

4.4.3 TEST PROCEDURES

Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
- 3) Sweep time = auto, trigger set to “free run”.
- 4) Trace average at least 100 traces in power averaging mode.
- 5) Record the max value


4.4.4 DEVIATION FROM TEST STANDARD

No deviation



A D T

4.4.5 TEST SETUP

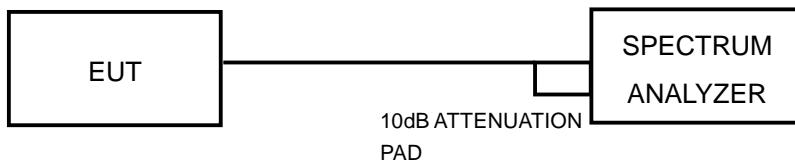

4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6



A D T

4.4.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
36	5180	3.89	4	PASS
40	5200	3.62	4	PASS
48	5240	3.98	4	PASS

802.11n (HT20)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
36	5180	0.44	1.03	3.76	4	PASS
40	5200	0.51	0.99	3.77	4	PASS
48	5240	0.45	1.10	3.80	4	PASS

Note: 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

802.11n (HT40)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
38	5190	-6.40	-6.52	-3.45	4	PASS
46	5230	-2.04	-2.03	0.98	4	PASS

Note: 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.



4.5 PEAK POWER EXCURSION MEASUREMENT

4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Shall not exceed 13 dB

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Oct. 30, 2012


4.5.3 TEST PROCEDURE

- 1) Set RBW = 1 MHz, VBW \geq 3 MHz, Detector = peak.
- 2) Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
- 3) Use the peak search function to find the peak of the spectrum.
- 4) Measure the PPSD.
- 5) Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

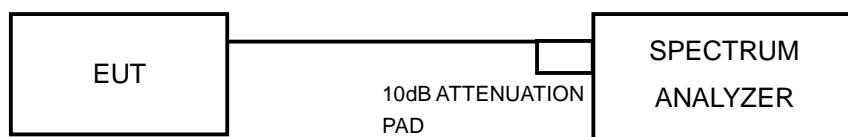

4.5.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.




A D T

4.5.7 TEST RESULTS

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK VALUE (dBm)	PPSD (dBm)	PEAK EXCURSION (dB)	LIMIT (dB)	PASS/FAIL
36	5180	12.69	3.89	8.80	13	PASS
40	5220	12.42	3.62	8.80	13	PASS
48	5240	12.85	3.98	8.87	13	PASS

PEAK VALUE: CH 48

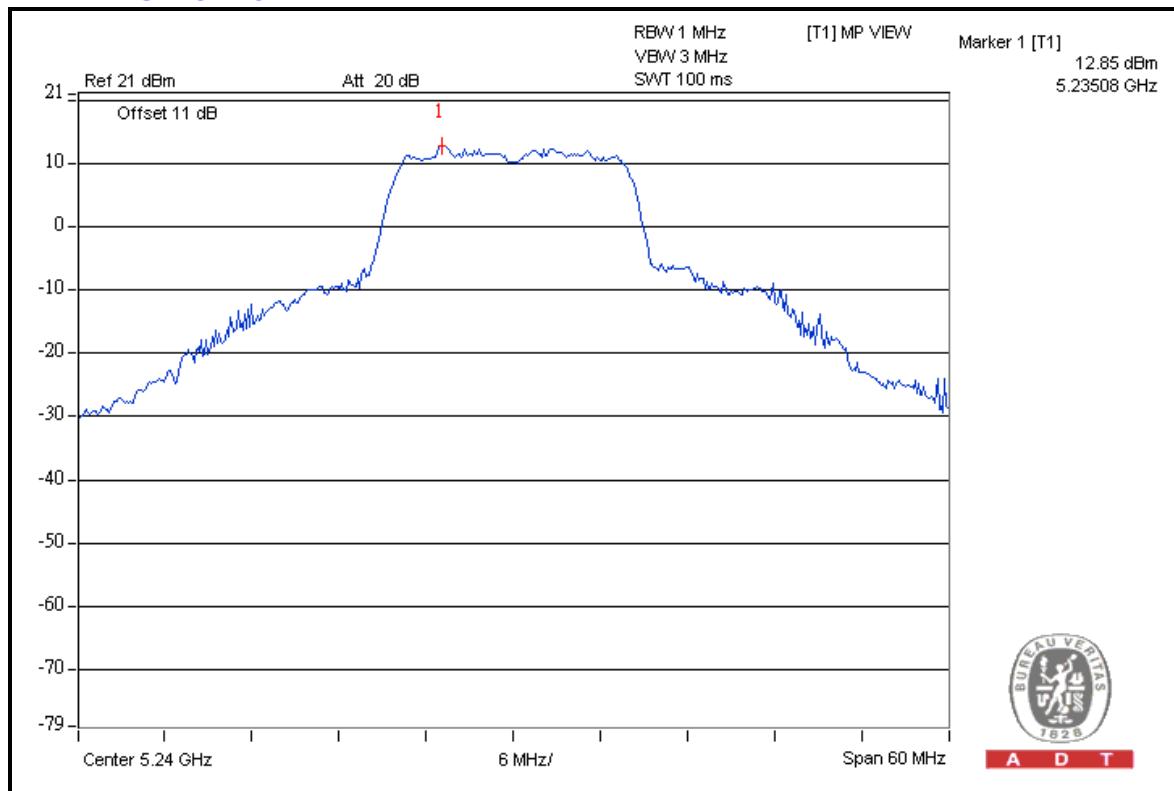




A D T

802.11n (HT20)

TX chain	CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK VALUE (dBm)	PPSD (dBm)	PEAK EXCURSION (dB)	LIMIT (dB)	PASS/FAIL
0	36	5180	8.94	0.44	8.50	13	PASS
	40	5200	9.23	0.51	8.72	13	PASS
	48	5240	9.07	0.45	8.62	13	PASS
1	36	5180	9.20	1.03	8.17	13	PASS
	40	5200	9.17	0.99	8.18	13	PASS
	48	5240	9.40	1.10	8.30	13	PASS

PEAK VALUE: For chain (0) CH 40

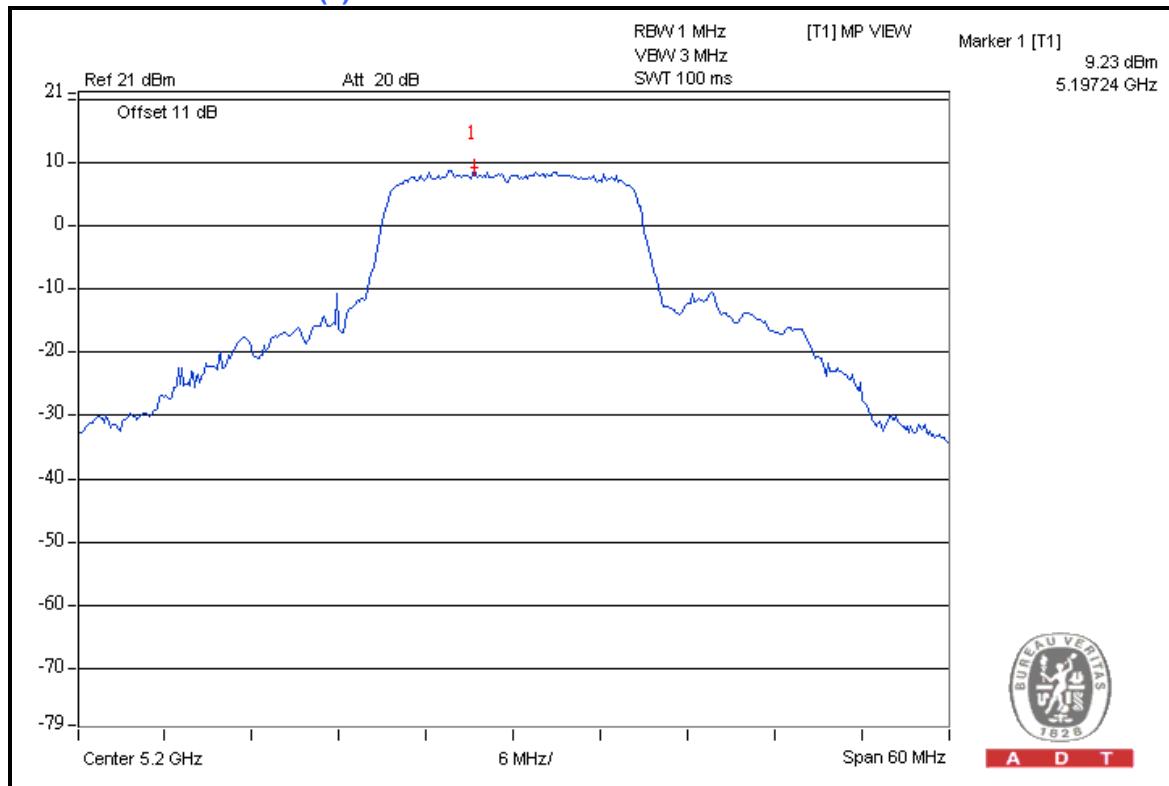




A D T

802.11n (HT40)

TX chain	CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK VALUE (dBm)	PPSD (dBm)	PEAK EXCURSION (dB)	LIMIT (dB)	PASS/FAIL
0	38	5190	2.02	-6.40	8.42	13	PASS
	46	5230	6.26	-2.04	8.30	13	PASS
1	38	5190	1.80	-6.52	8.32	13	PASS
	46	5230	6.37	-2.03	8.40	13	PASS

PEAK VALUE: For chain (0) CH 38

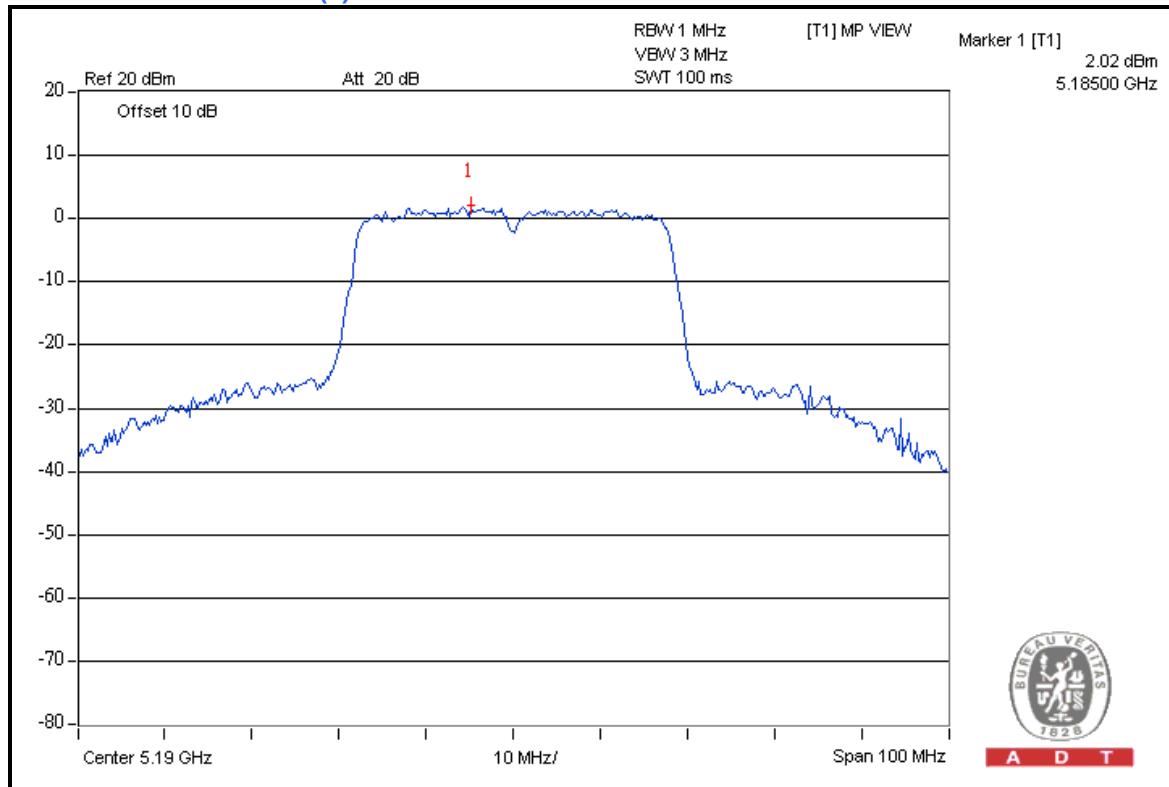



4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Oct. 30, 2012


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

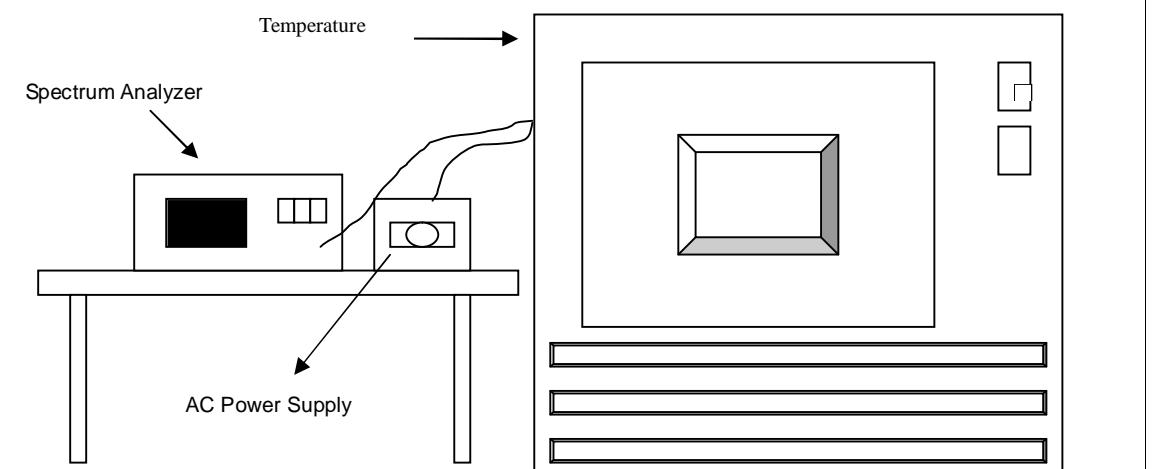

4.6.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



A D T

4.6.7 TEST RESULTS

FREQUEMCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift						
		(MHz)	ppm	(MHz)	ppm	(MHz)	ppm	(MHz)	ppm
50	120	5240.0093	1.7748	5240.0057	1.0878	5240.007	1.3359	5240.0089	1.6985
40	120	5239.981	-3.6260	5239.978	-4.1985	5239.981	-3.6260	5239.9779	-4.2176
30	120	5239.9951	-0.9351	5239.9997	-0.0573	5239.9987	-0.2481	5240.006	1.1450
20	120	5240.0077	1.4695	5240.0088	1.6794	5240.0043	0.8206	5240.0005	0.0954
10	120	5240.0213	4.0649	5240.0236	4.5038	5240.0195	3.7214	5240.0268	5.1145
0	120	5239.9976	-0.4580	5239.9967	-0.6298	5239.9924	-1.4504	5239.995	-0.9542
-10	120	5240.0034	0.6489	5240.0016	0.3053	5239.9984	-0.3053	5240	0.0000
-20	120	5240.0131	2.5000	5240.0168	3.2061	5240.0176	3.3588	5240.0182	3.4733
-30	120	5240.0094	1.7939	5240.0017	0.3244	5240.0084	1.6031	5240.0046	0.8779

FREQUEMCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift						
		(MHz)	ppm	(MHz)	ppm	(MHz)	ppm	(MHz)	ppm
20	138	5240.0086	1.6412	5240.0083	1.5840	5240.0058	1.1069	5240.0003	0.0573
	120	5240.0077	1.4695	5240.0088	1.6794	5240.0043	0.8206	5240.0005	0.0954
	102	5240.0089	1.6985	5240.0079	1.5076	5240.0052	0.9924	5240.0003	0.0573



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---