



# FCC TEST REPORT

**REPORT NO. :** RF940511L04

**MODEL NO. :** WAP54GX

**RECEIVED :** May 16, 2005

**TESTED :** May 16 ~ May 26, 2005

**ISSUED :** Jun. 02, 2005

**APPLICANT :** Cisco-Linksys LLC

**ADDRESS :** 121 Theory Drive Irvine, CA 92617, U.S.A.

**ISSUED BY:** Advance Data Technology Corporation

**LAB ADDRESS:** 47 14<sup>th</sup> Lin, Chiapau Tsun, Linko, Taipei,  
Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2<sup>nd</sup> Rd., Kueishan, Taoyuan,  
Taiwan, R.O.C.

This test report consists of 107 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



## TABLE OF CONTENTS

1.	CERTIFICATION .....	5
2.	SUMMARY OF TEST RESULTS .....	6
2.1	MEASUREMENT UNCERTAINTY .....	6
3.	GENERAL INFORMATION .....	7
3.1	GENERAL DESCRIPTION OF EUT .....	7
3.2	DESCRIPTION OF TEST MODES .....	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST .....	9
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	14
3.4	DESCRIPTION OF SUPPORT UNITS .....	14
4.	TEST TYPES AND RESULTS (FOR SINGLE CHAIN (TX)) .....	15
4.1	CONDUCTED EMISSION MEASUREMENT .....	15
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	15
4.1.2	TEST INSTRUMENTS .....	15
4.1.3	TEST PROCEDURES .....	16
4.1.4	DEVIATION FROM TEST STANDARD .....	16
4.1.5	TEST SETUP .....	17
4.1.6	EUT OPERATING CONDITIONS .....	17
4.1.7	TEST RESULTS .....	18
4.2	RADIATED EMISSION MEASUREMENT .....	24
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	24
4.2.2	TEST INSTRUMENTS .....	25
4.2.3	TEST PROCEDURES .....	26
4.2.4	DEVIATION FROM TEST STANDARD .....	27
4.2.5	TEST SETUP .....	27
4.2.6	EUT OPERATING CONDITIONS .....	27
4.2.7	TEST RESULTS .....	28
4.3	6dB BANDWIDTH MEASUREMENT .....	36
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	36
4.3.2	TEST INSTRUMENTS .....	36
4.3.3	TEST PROCEDURE .....	37
4.3.4	DEVIATION FROM TEST STANDARD .....	37
4.3.5	TEST SETUP .....	37
4.3.6	EUT OPERATING CONDITIONS .....	37
4.3.7	TEST RESULTS .....	38
4.4	MAXIMUM PEAK OUTPUT POWER .....	44
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	44

4.4.2 TEST INSTRUMENTS .....	44
4.4.3 TEST PROCEDURES.....	45
4.4.4 DEVIATION FROM TEST STANDARD .....	45
4.4.5 TEST SETUP .....	45
4.4.6 EUT OPERATING CONDITIONS.....	45
4.4.7 TEST RESULTS.....	46
4.5 POWER SPECTRAL DENSITY MEASUREMENT .....	47
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	47
4.5.2 TEST INSTRUMENTS .....	47
4.5.3 TEST PROCEDURE .....	48
4.5.4 DEVIATION FROM TEST STANDARD .....	48
4.5.5 TEST SETUP .....	48
4.5.6 EUT OPERATING CONDITIONS.....	48
4.5.7 TEST RESULTS.....	49
4.6 BAND EDGES MEASUREMENT .....	55
4.6.1 LIMITS OF BAND EDGES MEASUREMENT .....	55
4.6.2 TEST INSTRUMENTS .....	55
4.6.3 TEST PROCEDURE .....	55
4.6.4 DEVIATION FROM TEST STANDARD .....	55
4.6.5 EUT OPERATING CONDITION .....	55
4.6.6 TEST RESULTS.....	56
5. TEST TYPES AND RESULTS (FOR DUAL CHAIN (TX)).....	64
5.1 CONDUCTED EMISSION MEASUREMENT .....	64
5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	64
5.1.2 TEST INSTRUMENTS .....	64
5.1.3 TEST PROCEDURES.....	65
5.1.4 DEVIATION FROM TEST STANDARD .....	65
5.1.5 TEST SETUP .....	66
5.1.6 EUT OPERATING CONDITIONS.....	66
5.1.7 TEST RESULTS.....	67
5.2 RADIATED EMISSION MEASUREMENT .....	73
5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	73
5.2.2 TEST INSTRUMENTS .....	74
5.2.3 TEST PROCEDURES.....	75
5.2.4 DEVIATION FROM TEST STANDARD .....	76
5.2.5 TEST SETUP .....	76
5.2.6 EUT OPERATING CONDITIONS.....	76
5.2.7 TEST RESULTS.....	77
5.3 6dB BANDWIDTH MEASUREMENT.....	82

5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	82
5.3.2	TEST INSTRUMENTS .....	82
5.3.3	TEST PROCEDURE .....	83
5.3.4	DEVIATION FROM TEST STANDARD .....	83
5.3.5	TEST SETUP .....	83
5.3.6	EUT OPERATING CONDITIONS .....	83
5.3.7	TEST RESULTS .....	84
5.4	MAXIMUM PEAK OUTPUT POWER .....	88
5.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	88
5.4.2	TEST INSTRUMENTS .....	88
5.4.3	TEST PROCEDURES .....	89
5.4.4	DEVIATION FROM TEST STANDARD .....	89
5.4.5	TEST SETUP .....	89
5.4.6	EUT OPERATING CONDITIONS .....	89
5.4.7	TEST RESULTS .....	90
5.5	POWER SPECTRAL DENSITY MEASUREMENT .....	91
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	91
5.5.2	TEST INSTRUMENTS .....	91
5.5.3	TEST PROCEDURE .....	92
5.5.4	DEVIATION FROM TEST STANDARD .....	92
5.5.5	TEST SETUP .....	92
5.5.6	EUT OPERATING CONDITIONS .....	92
5.5.7	TEST RESULTS .....	93
5.6	BAND EDGES MEASUREMENT .....	97
5.6.1	LIMITS OF BAND EDGES MEASUREMENT .....	97
5.6.2	TEST INSTRUMENTS .....	97
5.6.3	TEST PROCEDURE .....	98
5.6.4	TEST SETUP .....	99
5.6.5	DEVIATION FROM TEST STANDARD .....	99
5.6.6	EUT OPERATING CONDITION .....	99
5.6.7	TEST RESULTS .....	100
5.7	ANTENNA REQUIREMENT .....	104
5.7.1	STANDARD APPLICABLE .....	104
5.7.2	ANTENNA CONNECTED CONSTRUCTION .....	104
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	105
7.	INFORMATION ON THE TESTING LABORATORIES .....	107

## 1. CERTIFICATION

**PRODUCT :** Wireless-G Access Point with SRX

**MODEL NO. :** WAP54GX

**BRAND NAME:** Linksys

**APPLICANT :** Cisco-Linksys LLC

**TESTED :** May 16 ~ May 20, 2005

**TEST ITEM :** Engineering Sample

**STANDARDS :** FCC Part 15, Subpart C (Section 15.247),  
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Wendy Liao, **DATE:** Jun. 02, 2005  
Wendy Liao

**TECHNICAL  
ACCEPTANCE :** Gary Chang, **DATE:** Jun. 02, 2005  
Responsible for RF  
Gary Chang

**APPROVED BY :** Cody Chang, **DATE:** Jun. 02, 2005  
Cody Chang / Deputy Manager

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is $-8.28\text{dB}$ at 0.322MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is $-1.70\text{dB}$ at 2483.50MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~ 1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Wireless-G Access Point with SRX
<b>MODEL NO.</b>	WAP54GX
<b>POWER SUPPLY</b>	12Vdc from AC adapter
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (MIMO OFDM: 54/48/36Mbps *see NOTE 8)
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>NUMBER OF CHANNEL</b>	11
<b>MAXIMUM OUTPUT POWER (SINGAL CHAIN)</b>	71.121mW
<b>MAXIMUM OUTPUT POWER (DUAL CHAIN)</b>	101.167mW
<b>ANTENNA TYPE</b>	Dipole antenna with 2dBi gain
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	RJ45
<b>ASSOCIATED DEVICES</b>	NA

#### NOTE:

1. The EUT was operated with following adapter:

<b>BRAND</b>	LINKSYS
<b>MODEL NO.</b>	411210003CT
<b>INPUT POWER</b>	120Vac, 60Hz, 20W
<b>OUTPUT POWER</b>	12Vdc, 1000mA
<b>POWER LINE</b>	DC 1.8m non-shielded cable without core

2. The EUT incorporates a MIMO function with IEEE 802.11b/g. Physically, the card provides two complete transmit and three receivers.
3. The EUT can operate in a single chain configuration (the chain 0 or 1 transceiver is operational) or dual chain configuration (both chain 0 and chain 1 transceivers are operational).
4. When the EUT is in the 802.11b mode, it is always in the single chain configuration.
5. When the EUT is operating in the 802.11g mode, it can operate in either configuration. Switching between the single and dual chain configurations is accomplished electronically, with no hardware changes required.


6. The EUT complies with IEEE 802.11g standards and backwards compatible with IEEE 802.11b products.
7. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
8. The transfer rate of transmitting in MIMO-OFDM mode is up to 54Mbps, but only receiving could up to 108Mbps
9. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

For 802.11b/g: Eleven channels are provided to this EUT for normal mode.

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

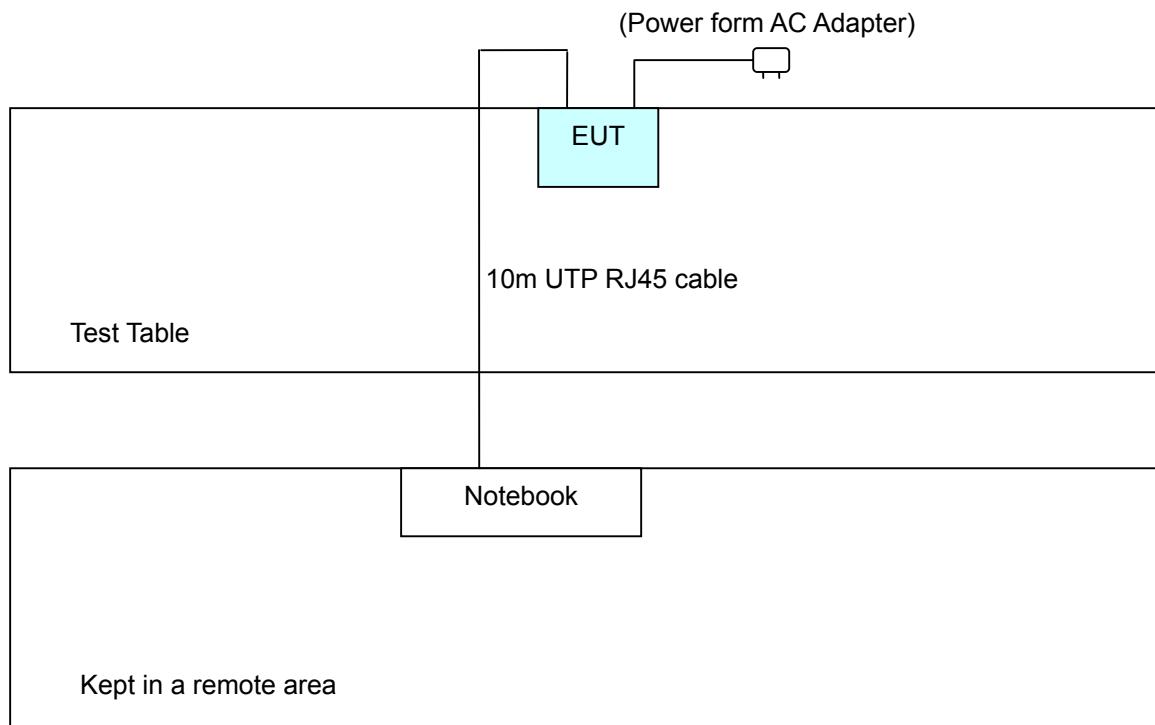

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

#### FOR SINGLE CHAIN (TX):

APPLICABLE TO				DESCRIPTION
PLC	RE<1G	RE≥1G	APCM	
v	v	v	v	NA

Where **PLC**: Power Line Conducted Emission

**RE<1G**: Radiated Emission below 1GHz

**RE≥1G**: Radiated Emission above 1GHz

**APCM**: Antenna Port Conducted Measurement

#### POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

#### RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

**RADIATED EMISSION TEST (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

**BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

**FOR DUAL CHAIN (TX):**

APPLICABLE TO				DESCRIPTION
PLC	RE<1G	RE≥1G	APCM	
v	v	v	v	NA

Where **PLC**: Power Line Conducted Emission  
**RE<1G**: Radiated Emission below 1GHz  
**RE≥1G**: Radiated Emission above 1GHz

**RE<1G**: Radiated Emission below 1GHz  
**APCM**: Antenna Port Conducted Measurement

**POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	16QAM	36

**RADIATED EMISSION TEST (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	11	OFDM	16QAM	36

**RADIATED EMISSION TEST (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	16QAM	36

**BANDEdge MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1, 11	OFDM	16QAM	36

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	16QAM	36

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless-G Access Point with SRX. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.247)**

**ANSI C63.4-2003**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	20838027664	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

**NOTE:** 1. All power cords of the above support units are non shielded (1.8m).

2. Item 1 act as a communication partner to transfer data.

## 4. TEST TYPES AND RESULTS (FOR SINGLE CHAIN (TX))

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 16, 2005
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 15, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Shielded Room 1.
  3. The VCCI Site Registration No. is C-2040.


#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

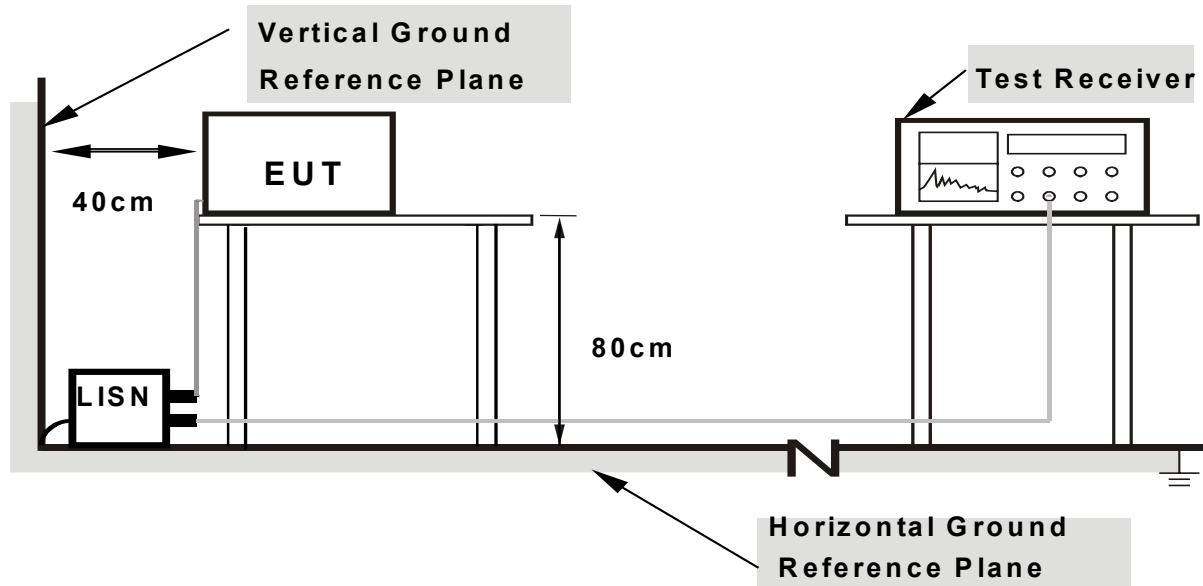

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared another Notebook system to act as a communication partner and placed it outside of testing.
- c. The communication partner connected with EUT via "RJ45" cable and run a test program (provided by manufacturer) to enable EUT under transmission / receiving condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".


#### 4.1.7 TEST RESULTS

##### CONDUCTED WORST CASE DATA

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	WAP54GX	<b>PHASE</b>	Line 1
<b>CHANNEL</b>	Channel 1	<b>6dB BANDWIDTH</b>	9 kHz
<b>MODULATION TYPE</b>	BPSK	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991hPa
<b>TRANSFER RATE</b>	6Mbps	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.11	52.34	23.81	52.45	23.92	65.38	55.38	-12.93	-31.46
2	0.323	0.11	47.29	21.39	47.40	21.50	59.62	49.62	-12.22	-28.12
3	0.962	0.23	27.21	-	27.44	-	56.00	-	-28.56	-
4	1.765	0.26	26.98	-	27.24	-	56.00	-	-28.76	-
5	11.082	0.54	45.66	35.59	46.20	36.13	60.00	50.00	-13.80	-13.87
6	13.816	0.55	45.79	35.44	46.34	35.99	60.00	50.00	-13.66	-14.01


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

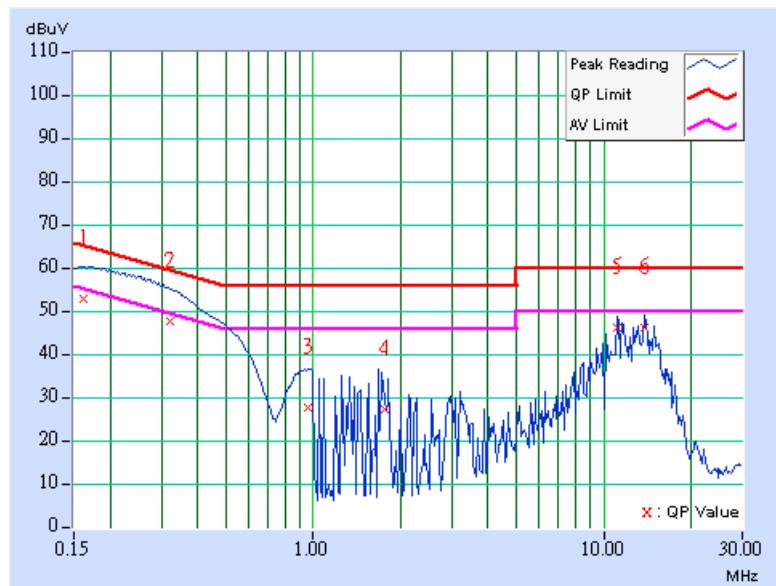

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	WAP54GX	<b>PHASE</b>	Line 2
<b>CHANNEL</b>	Channel 1	<b>6dB BANDWIDTH</b>	9 kHz
<b>MODULATION TYPE</b>	BPSK	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991hPa
<b>TRANSFER RATE</b>	6Mbps	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.11	53.24	24.32	53.35	24.43	65.38	55.38	-12.03	-30.95
2	<b>0.322</b>	<b>0.11</b>	<b>51.27</b>	<b>23.67</b>	<b>51.38</b>	<b>23.78</b>	<b>59.66</b>	<b>49.66</b>	<b>-8.28</b>	<b>-25.88</b>
3	0.964	0.23	39.71	15.86	39.94	16.09	56.00	46.00	-16.06	-29.91
4	1.289	0.25	34.76	-	35.01	-	56.00	-	-20.99	-
5	11.258	0.44	45.45	35.00	45.89	35.44	60.00	50.00	-14.11	-14.56
6	13.816	0.45	45.95	35.53	46.40	35.98	60.00	50.00	-13.60	-14.02


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

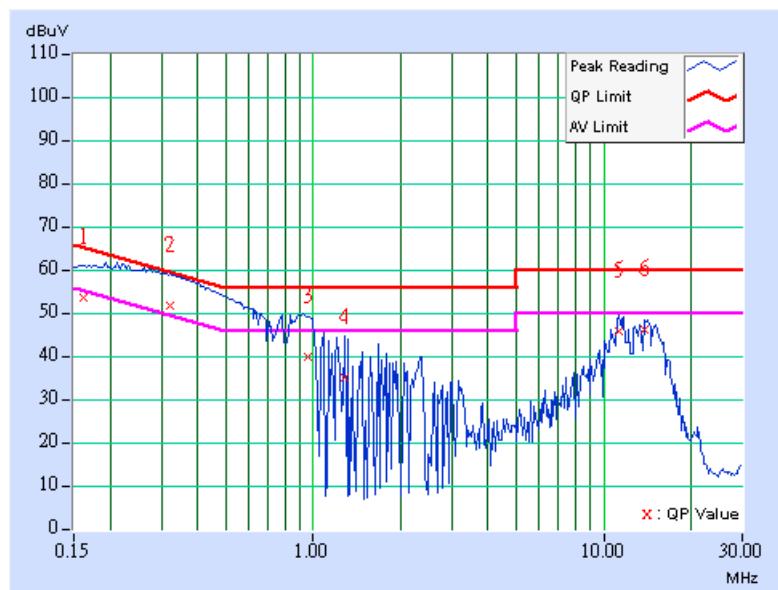

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	WAP54GX	<b>PHASE</b>	Line 1
<b>CHANNEL</b>	Channel 6	<b>6dB BANDWIDTH</b>	9 kHz
<b>MODULATION TYPE</b>	BPSK	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991hPa
<b>TRANSFER RATE</b>	6Mbps	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.11	52.54	23.66	52.65	23.77	65.58	55.58	-12.93	-31.81
2	0.323	0.11	47.19	21.53	47.30	21.64	59.63	49.63	-12.33	-27.99
3	0.963	0.23	27.01	-	27.24	-	56.00	-	-28.76	-
4	1.608	0.25	26.11	-	26.36	-	56.00	-	-29.64	-
5	11.098	0.54	42.93	32.39	43.47	32.93	60.00	50.00	-16.53	-17.07
6	13.348	0.55	44.07	34.15	44.62	34.70	60.00	50.00	-15.38	-15.30


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

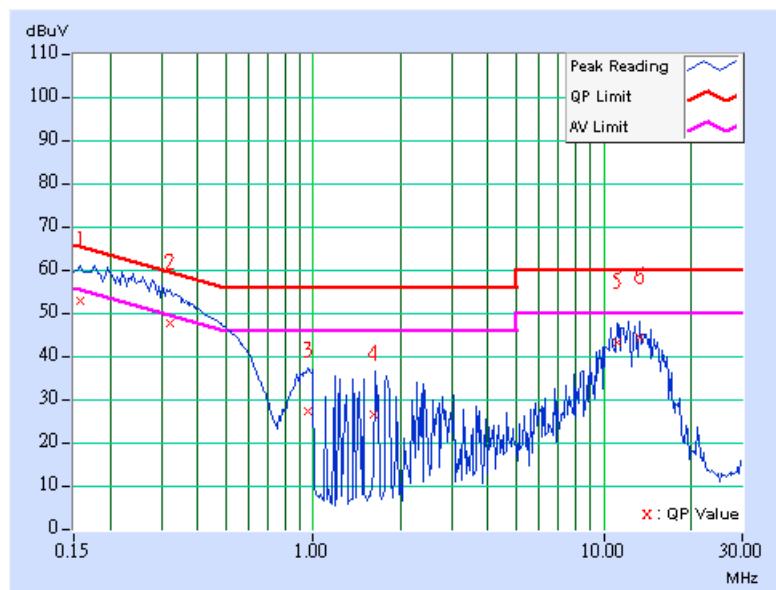

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	WAP54GX	<b>PHASE</b>	Line 2
<b>CHANNEL</b>	Channel 6	<b>6dB BANDWIDTH</b>	9 kHz
<b>MODULATION TYPE</b>	BPSK	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991hPa
<b>TRANSFER RATE</b>	6Mbps	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.159	0.11	53.18	24.19	53.29	24.30	65.52	55.52	-12.23	-31.22
2	0.322	0.11	50.95	23.45	51.06	23.56	59.64	49.64	-8.58	-26.08
3	0.966	0.23	39.26	15.65	39.49	15.88	56.00	46.00	-16.51	-30.12
4	1.772	0.26	33.11	-	33.37	-	56.00	-	-22.63	-
5	11.738	0.44	46.32	36.22	46.76	36.66	60.00	50.00	-13.24	-13.34
6	14.302	0.45	44.01	32.74	44.46	33.19	60.00	50.00	-15.54	-16.81


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

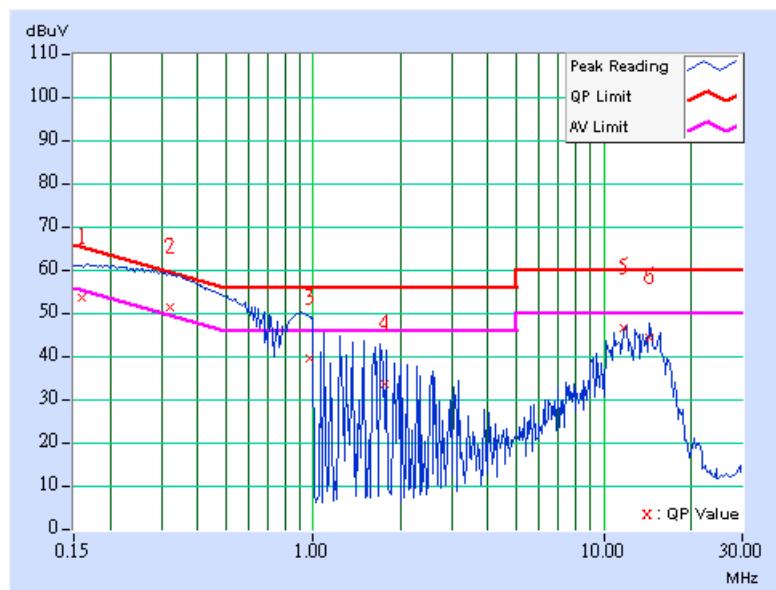

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	WAP54GX	<b>PHASE</b>	Line 1
<b>CHANNEL</b>	Channel 11	<b>6dB BANDWIDTH</b>	9 kHz
<b>MODULATION TYPE</b>	BPSK	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991hPa
<b>TRANSFER RATE</b>	6Mbps	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.11	52.22	23.66	52.33	23.77	65.38	55.38	-13.05	-31.61
2	0.323	0.11	47.13	21.44	47.24	21.55	59.63	49.63	-12.39	-28.08
3	0.964	0.23	26.97	-	27.20	-	56.00	46.00	-28.80	-
4	1.929	0.26	25.81	-	26.07	-	56.00	46.00	-29.93	-
5	11.258	0.54	45.33	34.90	45.87	35.44	60.00	50.00	-14.13	-14.56
6	13.816	0.55	45.51	34.18	46.06	34.73	60.00	50.00	-13.94	-15.27


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

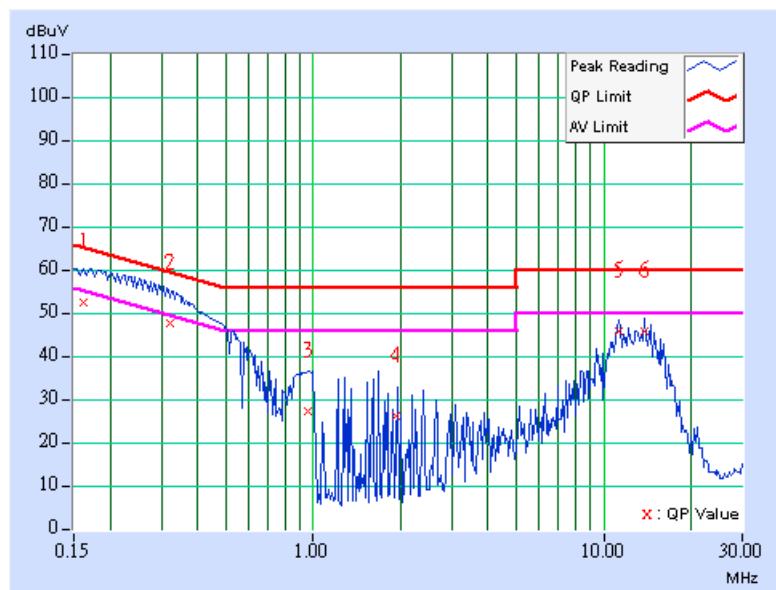

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	WAP54GX	<b>PHASE</b>	Line 2
<b>CHANNEL</b>	Channel 11	<b>6dB BANDWIDTH</b>	9 kHz
<b>MODULATION TYPE</b>	BPSK	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991hPa
<b>TRANSFER RATE</b>	6Mbps	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.11	53.32	24.12	53.43	24.23	65.58	55.58	-12.15	-31.35
2	0.322	0.11	51.21	23.60	51.32	23.71	59.67	49.67	-8.35	-25.96
3	0.963	0.23	39.63	15.11	39.86	15.34	56.00	46.00	-16.14	-30.66
4	1.928	0.26	31.18	-	31.44	-	56.00	-	-24.56	-
5	11.730	0.44	46.20	36.52	46.64	36.96	60.00	50.00	-13.36	-13.04
6	14.465	0.45	44.94	34.80	45.39	35.25	60.00	50.00	-14.61	-14.75

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

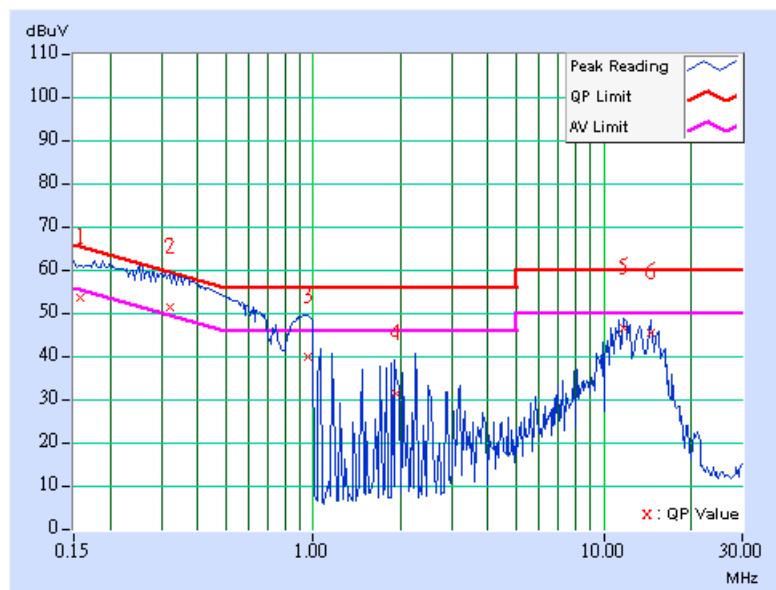

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>u</sub>V/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 19, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 21, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Jan. 22, 2006
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Jan. 16, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2006
Preamplifier Agilent	8449B	3008A01961	Nov. 09, 2005
Preamplifier Agilent	8447D	2944A10629	Nov. 09, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Feb. 17, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Feb. 17, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 1.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC4924-2.

#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

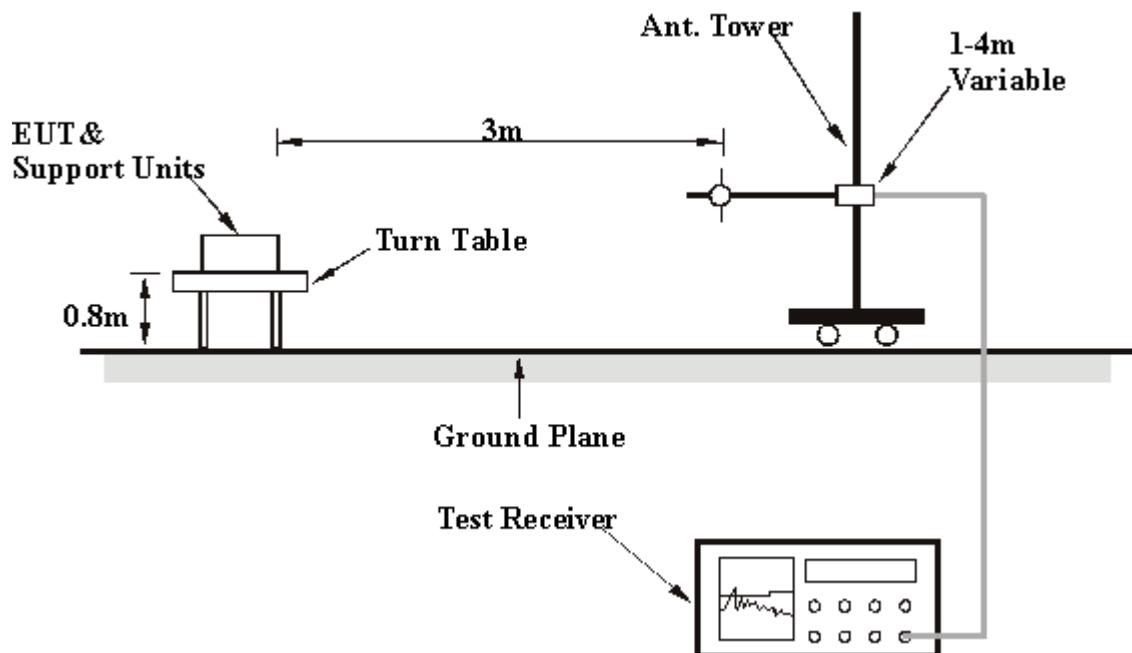

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

#### 4.2.7 TEST RESULTS

##### RADIATED WORST CASE DATA:

<b>EUT</b>		Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>		
<b>MODEL</b>		WAP54GX			<b>FREQUENCY RANGE</b>
<b>CHANNEL</b>		Channel 11			<b>DETECTOR FUNCTION</b>
<b>MODULATION TYPE</b>		BPSK			<b>ENVIRONMENTAL CONDITIONS</b>
<b>TRANSFER RATE</b>		6Mbps			<b>INPUT POWER (SYSTEM)</b>
<b>TESTED BY</b>		Match Tsui			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.16	29.06 QP	40.00	-10.94	2.50 H	211	15.53	13.54
2	111.64	35.70 QP	43.50	-7.80	2.50 H	214	23.76	11.94
3	144.69	30.71 QP	43.50	-12.79	2.00 H	19	16.39	14.32
4	195.23	31.72 QP	43.50	-11.78	1.50 H	355	20.21	11.51
5	278.82	37.81 QP	46.00	-8.19	1.00 H	316	23.80	14.01
6	352.69	30.96 QP	46.00	-15.04	1.00 H	298	15.44	15.53
7	420.72	35.81 QP	46.00	-10.19	2.00 H	307	18.64	17.16
8	560.68	32.20 QP	46.00	-13.80	1.50 H	322	12.31	19.88
9	628.72	31.81 QP	46.00	-14.19	1.00 H	301	10.52	21.29
10	700.64	32.32 QP	46.00	-13.68	1.00 H	61	10.06	22.26
11	751.18	34.53 QP	46.00	-11.47	1.00 H	55	11.10	23.42

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	WAP54GX	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>CHANNEL</b>	Channel 11	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>MODULATION TYPE</b>	BPSK	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 45%RH, 991hPa
<b>TRANSFER RATE</b>	6Mbps	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	61.10	36.50 QP	40.00	-3.50	1.00 V	1	23.17	13.33
2	94.15	26.69 QP	43.50	-16.81	1.00 V	91	16.41	10.28
3	138.86	30.74 QP	43.50	-12.76	1.00 V	232	16.60	14.13
4	195.23	33.19 QP	43.50	-10.31	1.00 V	214	21.68	11.51
5	278.82	36.28 QP	46.00	-9.72	1.50 V	31	22.27	14.01
6	420.72	34.40 QP	46.00	-11.60	1.50 V	220	17.23	17.16
7	560.68	29.71 QP	46.00	-16.29	1.00 V	274	9.82	19.88
8	630.66	29.49 QP	46.00	-16.51	1.00 V	262	8.17	21.32
9	700.64	32.56 QP	46.00	-13.44	1.50 V	67	10.30	22.26
10	751.18	32.25 QP	46.00	-13.75	1.50 V	49	8.83	23.42

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

**802.11b DSSS MODULATION**

EUT		Wireless-G Access Point with SRX	MEASUREMENT DETAIL		
<b>MODEL</b>		WAP54GX	<b>FREQUENCY RANGE</b>		1 ~ 25GHz
<b>CHANNEL</b>		Channel 1	<b>DETECTOR FUNCTION</b>		Peak (PK) Average (AV)
<b>MODULATION TYPE</b>		CCK	<b>ENVIRONMENTAL CONDITIONS</b>		25deg. C, 70%RH, 991hPa
<b>TRANSFER RATE</b>		11Mbps	<b>INPUT POWER (SYSTEM)</b>		120Vac, 60 Hz
<b>TESTED BY</b>		Match Tsui			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1680.00	43.44 PK	74.00	-30.56	1.22 H	160	15.33	28.10
1	1680.00	38.13 AV	54.00	-15.87	1.22 H	160	10.02	28.10
2	2386.00	53.88 PK	74.00	-20.12	1.07 H	182	22.92	30.96
2	2386.00	44.93 AV	54.00	-9.07	1.07 H	182	13.97	30.96
3	*2412.00	100.29 PK			1.07 H	182	69.23	31.06
3	*2412.00	93.75 AV			1.07 H	182	62.69	31.06
4	4824.00	46.36 PK	74.00	-27.64	1.18 H	1	9.93	36.43
4	4824.00	33.30 AV	54.00	-20.70	1.18 H	1	-3.13	36.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1680.00	47.49 PK	74.00	-26.51	1.00 V	143	19.38	28.10
1	1680.00	43.93 AV	54.00	-10.07	1.00 V	143	15.82	28.10
2	2386.00	60.10 PK	74.00	-13.90	1.07 V	3	29.14	30.96
2	2386.00	51.91 AV	54.00	-2.09	1.07 V	3	20.95	30.96
3	*2412.00	112.19 PK			1.07 V	3	81.13	31.06
3	*2412.00	106.64 AV			1.07 V	3	75.58	31.06
4	2628.00	55.08 PK	74.00	-18.92	1.23 V	189	23.38	31.70
4	2628.00	49.23 AV	54.00	-4.77	1.23 V	189	17.53	31.70
5	4824.00	48.46 PK	74.00	-25.54	1.09 V	319	12.03	36.43
5	4824.00	39.38 AV	54.00	-14.62	1.09 V	319	2.95	36.43

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “\*”: Fundamental frequency.

<b>EUT</b>		Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>		
<b>MODEL</b>		WAP54GX	<b>FREQUENCY RANGE</b>		1 ~ 25GHz
<b>CHANNEL</b>		Channel 6	<b>DETECTOR FUNCTION</b>		Peak (PK) Average (AV)
<b>MODULATION TYPE</b>		CCK	<b>ENVIRONMENTAL CONDITIONS</b>		25deg. C, 70%RH, 991hPa
<b>TRANSFER RATE</b>		11Mbps	<b>INPUT POWER (SYSTEM)</b>		120Vac, 60 Hz
<b>TESTED BY</b>		Match Tsui			

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1740.00	44.28 PK	74.00	-29.72	1.16 H	208	16.07	28.21
1	1740.00	38.39 AV	54.00	-15.61	1.16 H	208	10.18	28.21
2	*2437.00	104.97 PK			1.37 H	238	73.80	31.17
2	*2437.00	99.68 AV			1.37 H	238	68.51	31.17
3	4874.00	47.27 PK	74.00	-26.73	1.15 H	291	10.73	36.54
3	4874.00	38.50 AV	54.00	-15.50	1.15 H	291	1.96	36.54

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1740.00	49.05 PK	74.00	-24.95	1.00 V	360	20.84	28.21
1	1740.00	44.57 AV	54.00	-9.43	1.00 V	360	16.36	28.21
2	2376.00	59.56 PK	74.00	-14.44	1.04 V	24	28.64	30.92
2	2376.00	49.96 AV	54.00	-4.04	1.04 V	24	19.04	30.92
3	*2437.00	115.89 PK			1.04 V	24	84.72	31.17
3	*2437.00	109.52 AV			1.04 V	24	78.35	31.17
4	2783.00	54.12 PK	74.00	-19.88	1.00 V	151	22.16	31.96
4	2783.00	47.07 AV	54.00	-6.93	1.00 V	151	15.11	31.96
5	3134.00	47.62 PK	74.00	-26.38	1.14 V	210	15.13	32.49
5	3134.00	43.07 AV	54.00	-10.93	1.14 V	210	10.58	32.49
6	4874.00	51.46 PK	74.00	-22.54	1.06 V	346	14.92	36.54
6	4874.00	44.47 AV	54.00	-9.53	1.06 V	346	7.93	36.54

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “\*”: Fundamental frequency.

<b>EUT</b>		Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>		
<b>MODEL</b>		WAP54GX	<b>FREQUENCY RANGE</b>		1 ~ 25GHz
<b>CHANNEL</b>		Channel 11	<b>DETECTOR FUNCTION</b>		Peak (PK) Average (AV)
<b>MODULATION TYPE</b>		CCK	<b>ENVIRONMENTAL CONDITIONS</b>		25deg. C, 70%RH, 991hPa
<b>TRANSFER RATE</b>		11Mbps	<b>INPUT POWER (SYSTEM)</b>		120Vac, 60 Hz
<b>TESTED BY</b>		Match Tsui			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1760.00	43.93 PK	74.00	-30.07	1.11 H	227	15.69	28.24
1	1760.00	37.93 AV	54.00	-16.07	1.11 H	227	9.69	28.24
2	*2462.00	102.61 PK			1.06 H	216	71.33	31.28
2	*2462.00	97.25 AV			1.06 H	216	65.97	31.28
3	2483.50	53.95 PK	74.00	-20.05	1.06 H	216	22.58	31.37
3	2483.50	45.00 AV	54.00	-9.00	1.06 H	216	13.63	31.37
4	4924.00	47.66 PK	74.00	-26.34	1.08 H	310	11.00	36.66
4	4924.00	33.56 AV	54.00	-20.44	1.08 H	310	-3.10	36.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1760.00	45.72 PK	74.00	-28.28	1.00 V	302	17.48	28.24
1	1760.00	41.45 AV	54.00	-12.55	1.00 V	302	13.21	28.24
2	*2462.00	112.96 PK			1.03 V	38	81.68	31.28
2	*2462.00	107.66 AV			1.03 V	38	76.38	31.28
3	2487.00	60.70 PK	74.00	-13.30	1.03 V	38	29.32	31.38
3	2487.00	51.88 AV	54.00	-2.12	1.03 V	38	20.50	31.38
4	2818.00	51.13 PK	74.00	-22.87	1.12 V	360	19.11	32.02
4	2818.00	44.87 AV	54.00	-9.13	1.12 V	360	12.85	32.02
5	4924.00	52.21 PK	74.00	-21.79	1.06 V	348	15.55	36.66
5	4924.00	43.60 AV	54.00	-10.40	1.06 V	348	6.94	36.66

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “\*”: Fundamental frequency.

**802.11g OFDM MODULATION**

EUT		Wireless-G Access Point with SRX	MEASUREMENT DETAIL		
<b>MODEL</b>		WAP54GX	<b>FREQUENCY RANGE</b>		1 ~ 25GHz
<b>CHANNEL</b>		Channel 1	<b>DETECTOR FUNCTION</b>		Peak (PK) Average (AV)
<b>MODULATION TYPE</b>		BPSK	<b>ENVIRONMENTAL CONDITIONS</b>		25deg. C, 70%RH, 991hPa
<b>TRANSFER RATE</b>		6Mbps	<b>INPUT POWER (SYSTEM)</b>		120Vac, 60 Hz
<b>TESTED BY</b>		Match Tsui			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1680.00	43.23 PK	74.00	-30.77	1.20 H	186	15.12	28.10
1	1680.00	37.31 AV	54.00	-16.69	1.20 H	186	9.20	28.10
2	2390.00	54.45 PK	74.00	-19.55	1.10 H	193	23.48	30.97
2	2390.00	45.26 AV	54.00	-8.74	1.10 H	193	14.29	30.97
3	*2412.00	96.47 PK			1.10 H	193	65.41	31.06
3	*2412.00	87.10 AV			1.10 H	193	56.04	31.06
4	4824.00	44.72 PK	74.00	-29.28	1.11 H	120	8.29	36.43
4	4824.00	31.70 AV	54.00	-22.30	1.11 H	120	-4.73	36.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1680.00	45.81 PK	74.00	-28.19	1.00 V	169	17.70	28.10
1	1680.00	42.21 AV	54.00	-11.79	1.00 V	169	14.10	28.10
2	2040.00	47.46 PK	74.00	-26.54	1.42 V	177	17.94	29.52
2	2040.00	35.16 AV	54.00	-18.84	1.42 V	177	5.64	29.52
3	2390.00	66.29 PK	74.00	-7.71	1.08 V	253	35.32	30.97
3	2390.00	51.81 AV	54.00	-2.19	1.08 V	253	20.84	30.97
4	*2412.00	106.74 PK			1.08 V	253	75.68	31.06
4	*2412.00	96.24 AV			1.08 V	253	65.18	31.06
5	2628.00	53.51 PK	74.00	-20.49	1.00 V	191	21.81	31.70
5	2628.00	43.53 AV	54.00	-10.47	1.00 V	191	11.83	31.70
6	4824.00	45.71 PK	74.00	-28.29	1.00 V	1	9.28	36.43
6	4824.00	31.92 AV	54.00	-22.08	1.00 V	1	-4.51	36.43

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “\*”: Fundamental frequency.

<b>EUT</b>		Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>		
<b>MODEL</b>		WAP54GX	<b>FREQUENCY RANGE</b>		1 ~ 25GHz
<b>CHANNEL</b>		Channel 6	<b>DETECTOR FUNCTION</b>		Peak (PK) Average (AV)
<b>MODULATION TYPE</b>		BPSK	<b>ENVIRONMENTAL CONDITIONS</b>		25deg. C, 70%RH, 991hPa
<b>TRANSFER RATE</b>		6Mbps	<b>INPUT POWER (SYSTEM)</b>		120Vac, 60 Hz
<b>TESTED BY</b>		Match Tsui			

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1740.00	44.91 PK	74.00	-29.09	1.19 H	198	16.70	28.21
1	1740.00	38.82 AV	54.00	-15.18	1.19 H	198	10.61	28.21
2	*2437.00	105.15 PK			1.08 H	193	73.98	31.17
2	*2437.00	95.60 AV			1.08 H	193	64.43	31.17
3	4874.00	48.06 PK	74.00	-25.94	1.15 H	200	11.52	36.54
3	4874.00	34.44 AV	54.00	-19.56	1.15 H	200	-2.10	36.54

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1740.00	47.54 PK	74.00	-26.46	1.00 V	298	19.33	28.21
1	1740.00	43.14 AV	54.00	-10.86	1.00 V	298	14.93	28.21
2	2380.00	61.37 PK	74.00	-12.63	1.30 V	1	30.44	30.93
2	2380.00	51.40 AV	54.00	-2.60	1.30 V	1	20.47	30.93
3	*2437.00	116.49 PK			1.30 V	1	85.32	31.17
3	*2437.00	106.96 AV			1.30 V	1	75.79	31.17
4	2783.00	55.21 PK	74.00	-18.79	1.13 V	16	23.25	31.96
4	2783.00	45.51 AV	54.00	-8.49	1.13 V	16	13.55	31.96
5	3134.00	49.03 PK	74.00	-24.97	1.17 V	210	16.54	32.49
5	3134.00	44.96 AV	54.00	-9.04	1.17 V	210	12.47	32.49
6	4874.00	50.76 PK	74.00	-23.24	1.05 V	336	14.22	36.54
6	4874.00	38.14 AV	54.00	-15.86	1.05 V	336	1.60	36.54

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “\*”: Fundamental frequency.

<b>EUT</b>		Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>		
<b>MODEL</b>		WAP54GX	<b>FREQUENCY RANGE</b>		1 ~ 25GHz
<b>CHANNEL</b>		Channel 11	<b>DETECTOR FUNCTION</b>		Peak (PK) Average (AV)
<b>MODULATION TYPE</b>		BPSK	<b>ENVIRONMENTAL CONDITIONS</b>		25deg. C, 70%RH, 991hPa
<b>TRANSFER RATE</b>		6Mbps	<b>INPUT POWER (SYSTEM)</b>		120Vac, 60 Hz
<b>TESTED BY</b>		Match Tsui			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1760.00	42.88 PK	74.00	-31.12	1.15 H	193	14.64	28.24
1	1760.00	36.71 AV	54.00	-17.29	1.15 H	193	8.47	28.24
2	*2462.00	100.19 PK			1.32 H	217	68.91	31.28
2	*2462.00	90.82 AV			1.32 H	217	59.54	31.28
3	2483.50	60.01 PK	74.00	-13.99	1.32 H	217	28.64	31.37
3	2483.50	47.10 AV	54.00	-6.90	1.32 H	217	15.73	31.37
4	4924.00	46.70 PK	74.00	-27.30	1.15 H	135	10.04	36.66
4	4924.00	34.29 AV	54.00	-19.71	1.15 H	135	-2.37	36.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1760.00	44.47 PK	74.00	-29.53	1.30 V	171	16.23	28.24
1	1760.00	39.71 AV	54.00	-14.29	1.30 V	171	11.47	28.24
2	*2462.00	110.74 PK			1.07 V	138	79.46	31.28
2	*2462.00	100.50 AV			1.07 V	138	69.22	31.28
3	2483.50	66.42 PK	74.00	-7.58	1.07 V	138	35.05	31.37
3	2483.50	51.78 AV	54.00	-2.22	1.07 V	138	20.41	31.37
4	2817.00	49.04 PK	74.00	-24.96	1.34 V	5	17.02	32.02
4	2817.00	39.17 AV	54.00	-14.83	1.34 V	5	7.15	32.02
5	4924.00	47.69 PK	74.00	-26.31	1.07 V	1	11.03	36.66
5	4924.00	34.97 AV	54.00	-19.03	1.07 V	1	-1.69	36.66

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “\*”: Fundamental frequency.

## 4.3 6dB BANDWIDTH MEASUREMENT

### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP

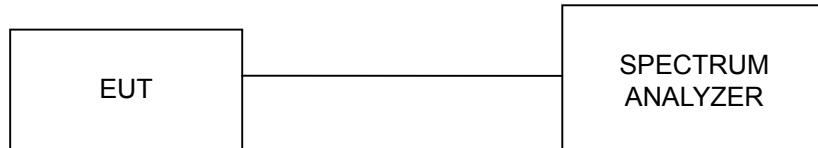

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


#### 4.3.7 TEST RESULTS

##### 802.11b DSSS MODULATION


<b>EUT</b>	Wireless-G Access Point with SRX	<b>MODEL</b>	WAP54GX
<b>MODULATION TYPE</b>	CCK	<b>TRANSFER RATE</b>	11Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 64%RH, 991hPa
<b>TESTED BY</b>	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	9.64	0.5	PASS
6	2437	9.76	0.5	PASS
11	2462	8.04	0.5	PASS


## CH1

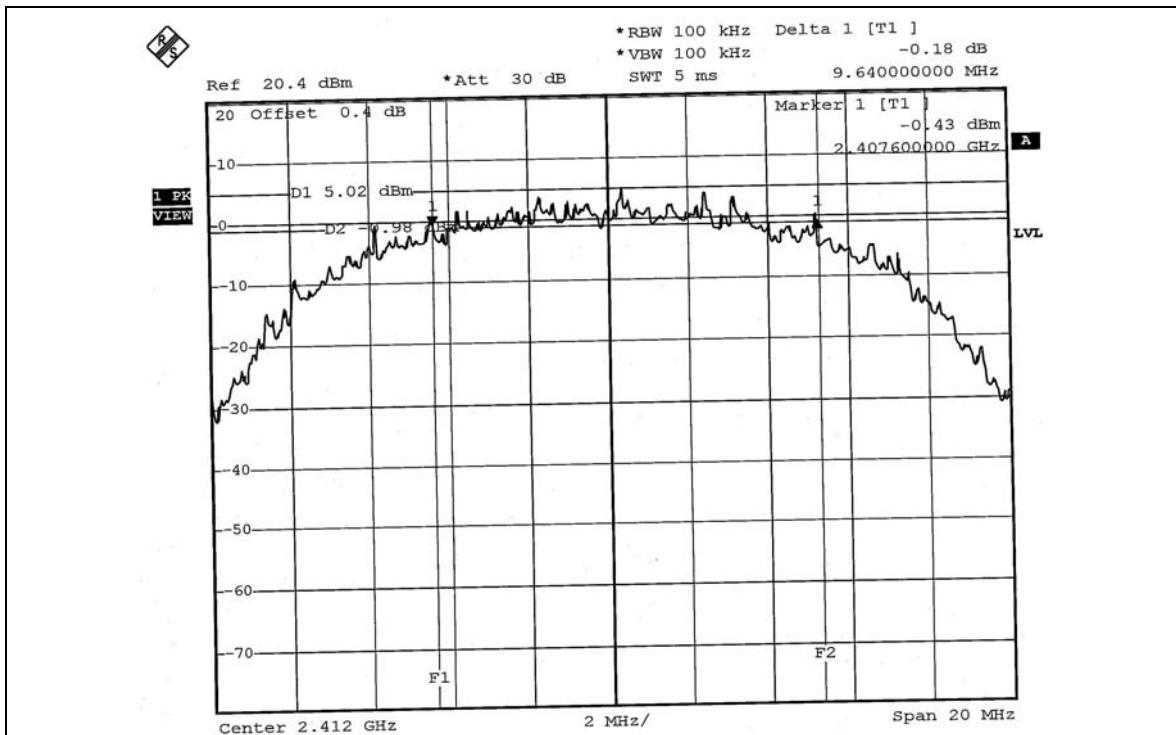

## CH6

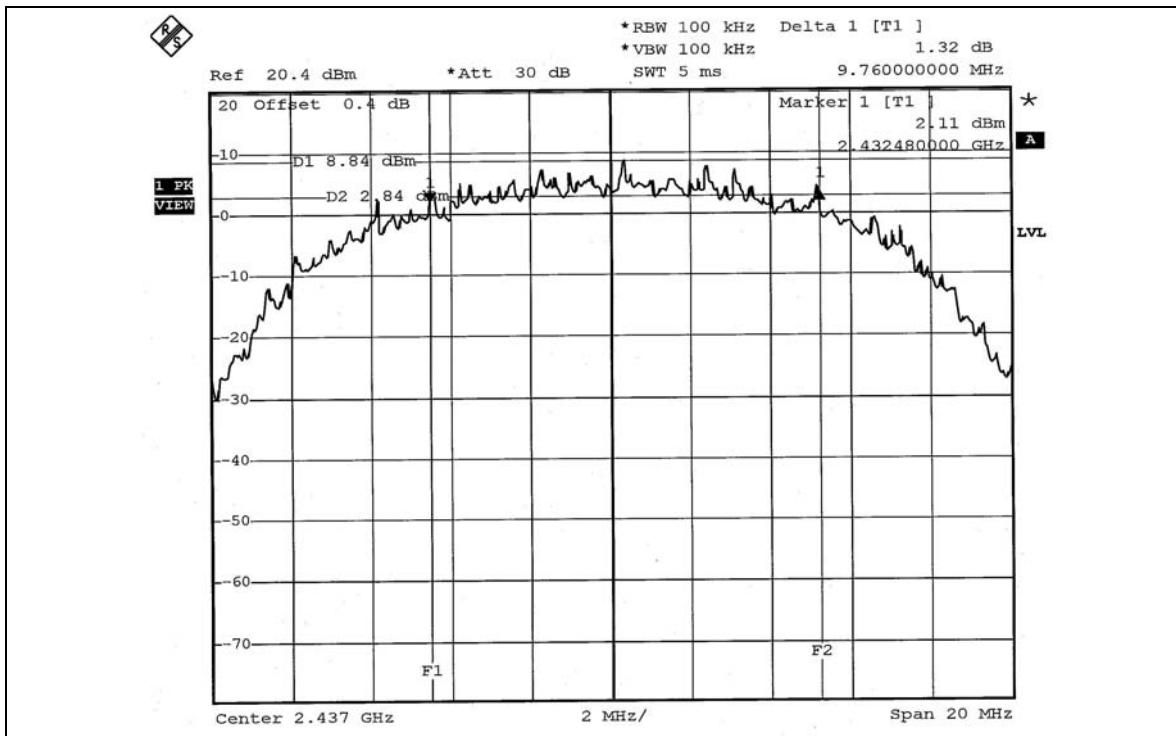

## CH11

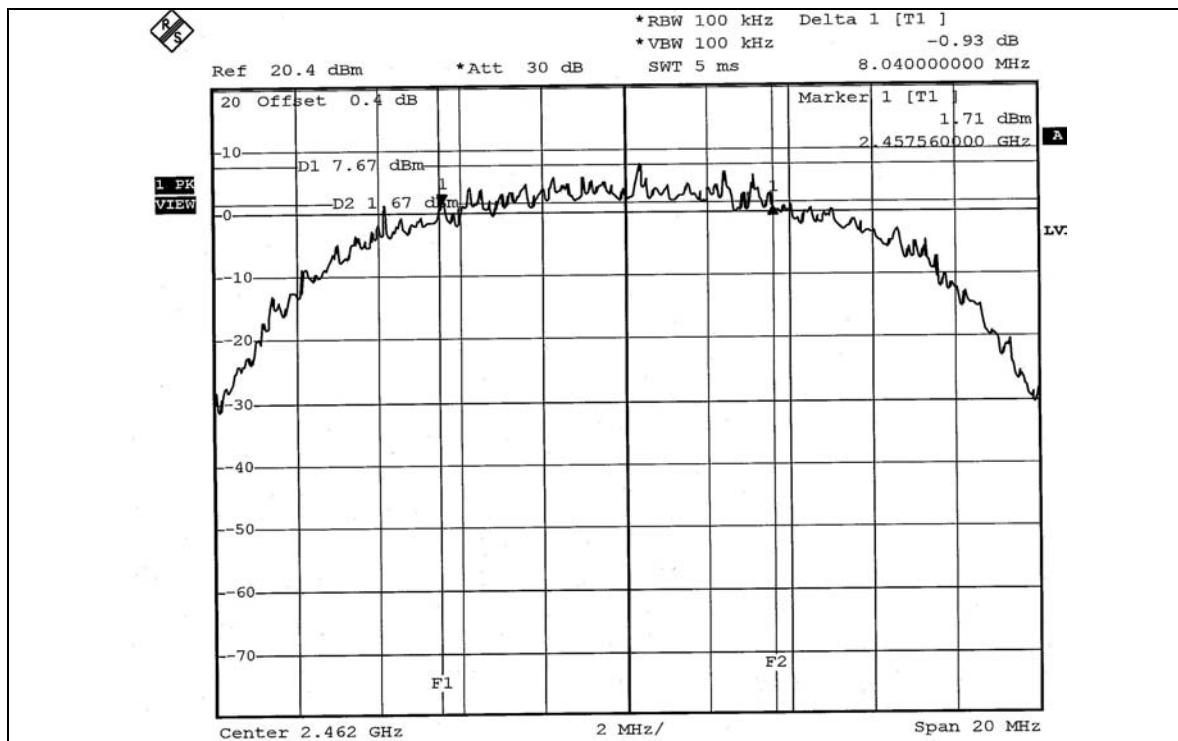

FCC ID: Q87-WAP54GX




### 802.11g OFDM MODULATION


<b>EUT</b>	Wireless-G Access Point with SRX	<b>MODEL</b>	WAP54GX
<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 64%RH, 991hPa
<b>TESTED BY</b>	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	15.04	0.5	PASS
6	2437	15.12	0.5	PASS
11	2462	15.16	0.5	PASS


## CH1

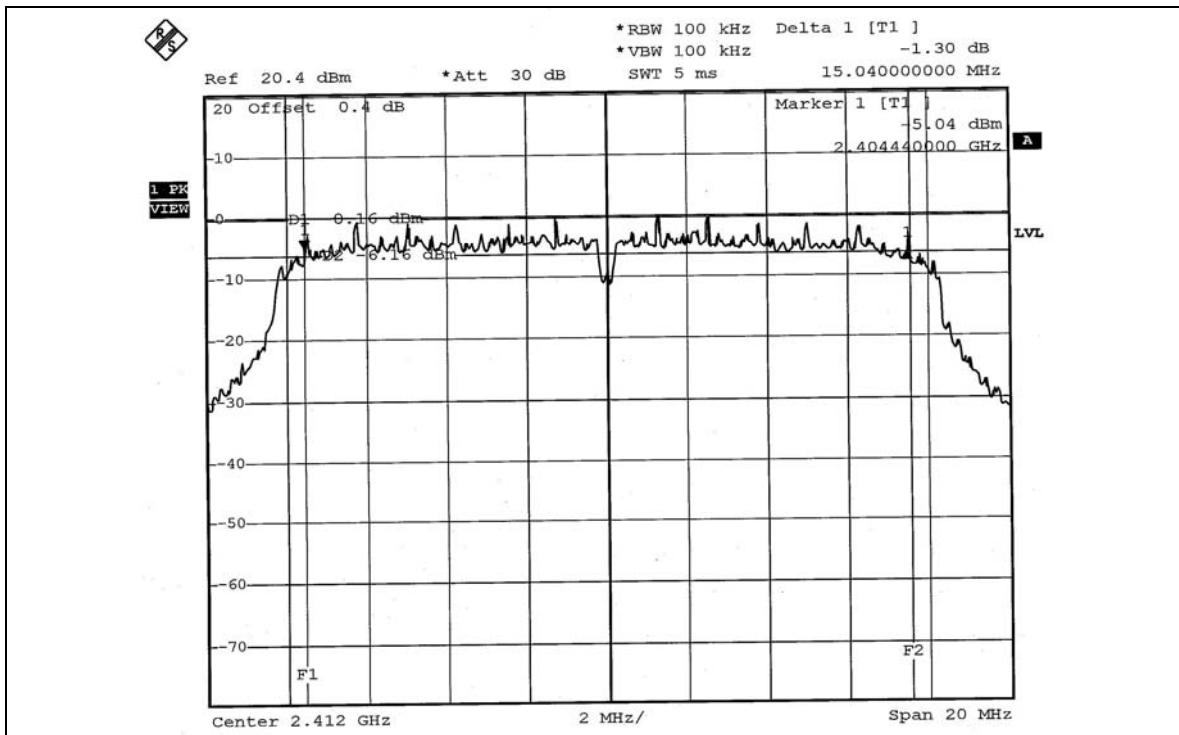

## CH6

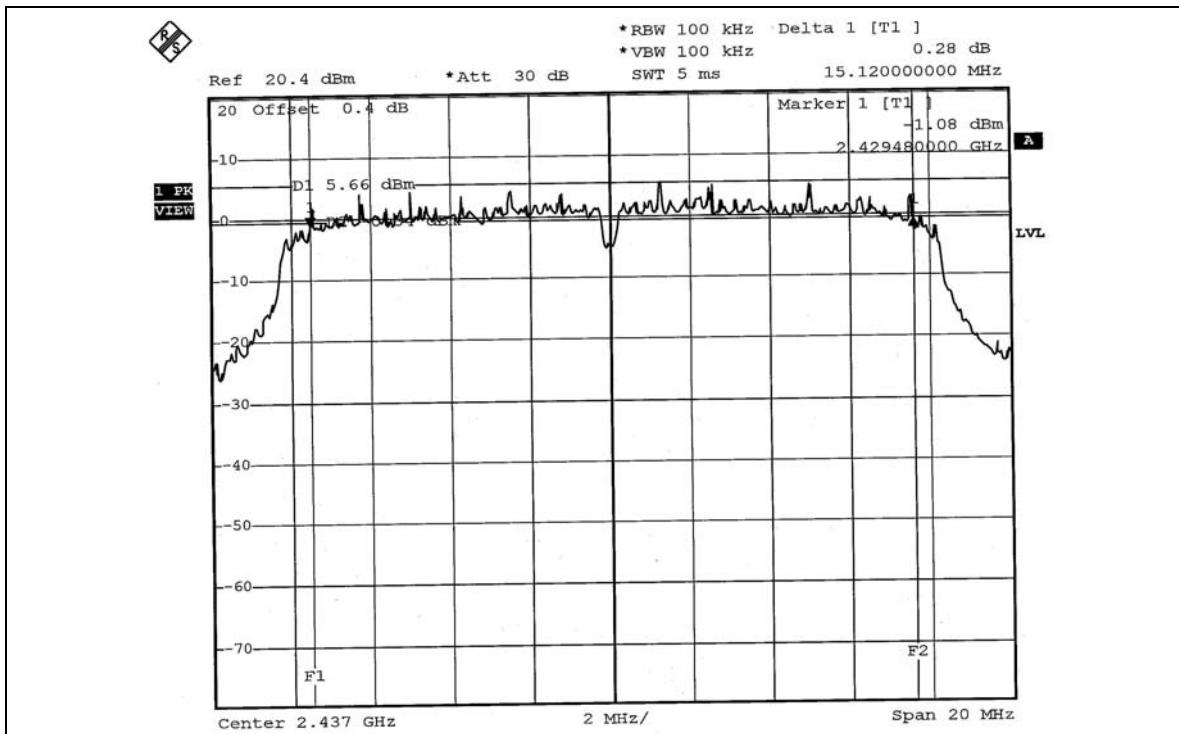

CH11

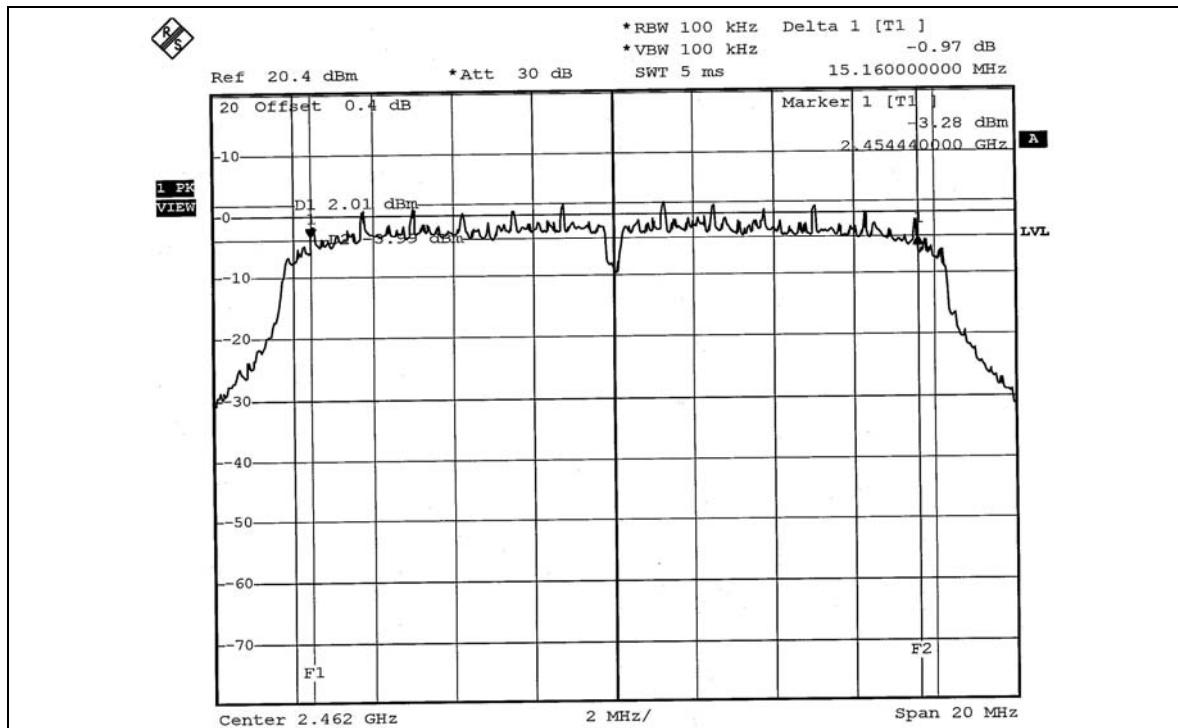

## 4.4 MAXIMUM PEAK OUTPUT POWER

### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 06, 2005
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

#### 4.4.7 TEST RESULTS

##### 802.11b DSSS MODULATION

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MODEL</b>	WAP54GX
<b>MODULATION TYPE</b>	CCK	<b>TRANSFER RATE</b>	11Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 64%RH, 991hPa
<b>TESTED BY</b>	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	35.645	15.52	30	PASS
6	2437	70.958	18.51	30	PASS
11	2462	51.523	17.12	30	PASS

##### 802.11g OFDM MODULATION

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MODEL</b>	WAP54GX
<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 64%RH, 991hPa
<b>TESTED BY</b>	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	28.510	14.55	30	PASS
6	2437	71.121	18.52	30	PASS
11	2462	39.902	16.01	30	PASS

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP



#### 4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6


#### 4.5.7 TEST RESULTS

##### 802.11b DSSS MODULATION


<b>EUT</b>	Wireless-G Access Point with SRX	<b>MODEL</b>	WAP54GX
<b>MODULATION TYPE</b>	CCK	<b>TRANSFER RATE</b>	11Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 64%RH, 991hPa
<b>TESTED BY</b>	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-10.89	8	PASS
6	2437	-7.05	8	PASS
11	2462	-7.91	8	PASS


## CH1

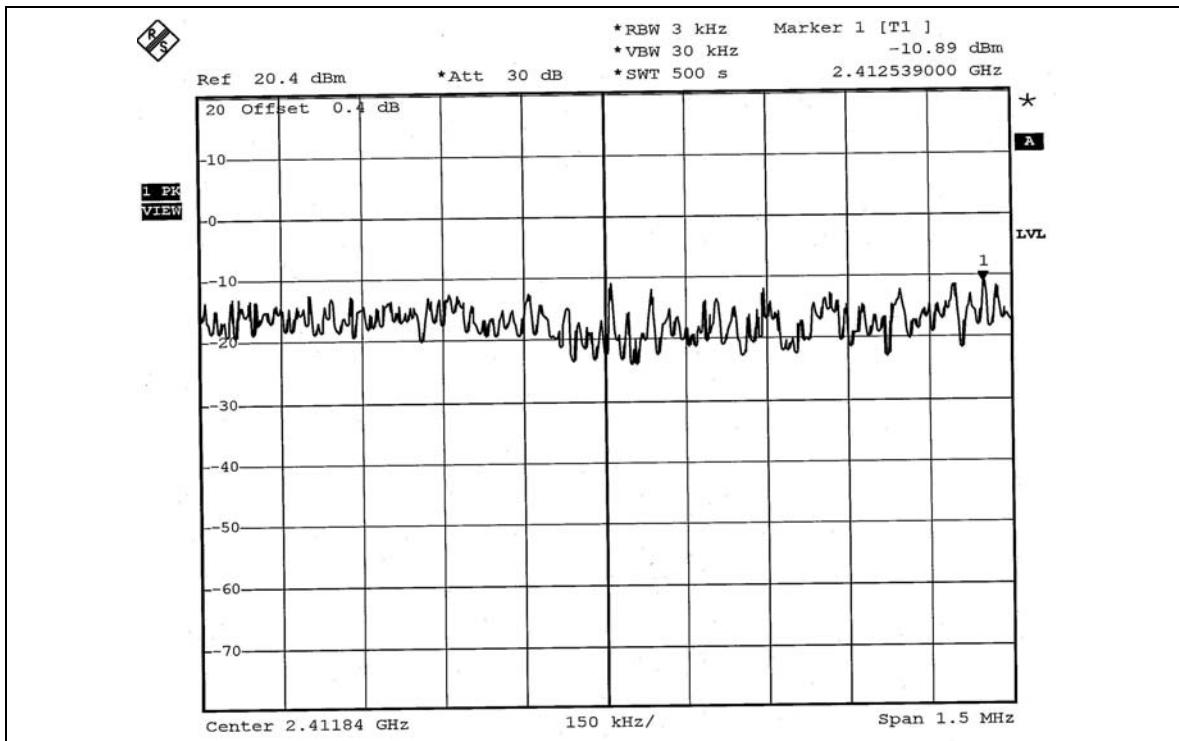

## CH6

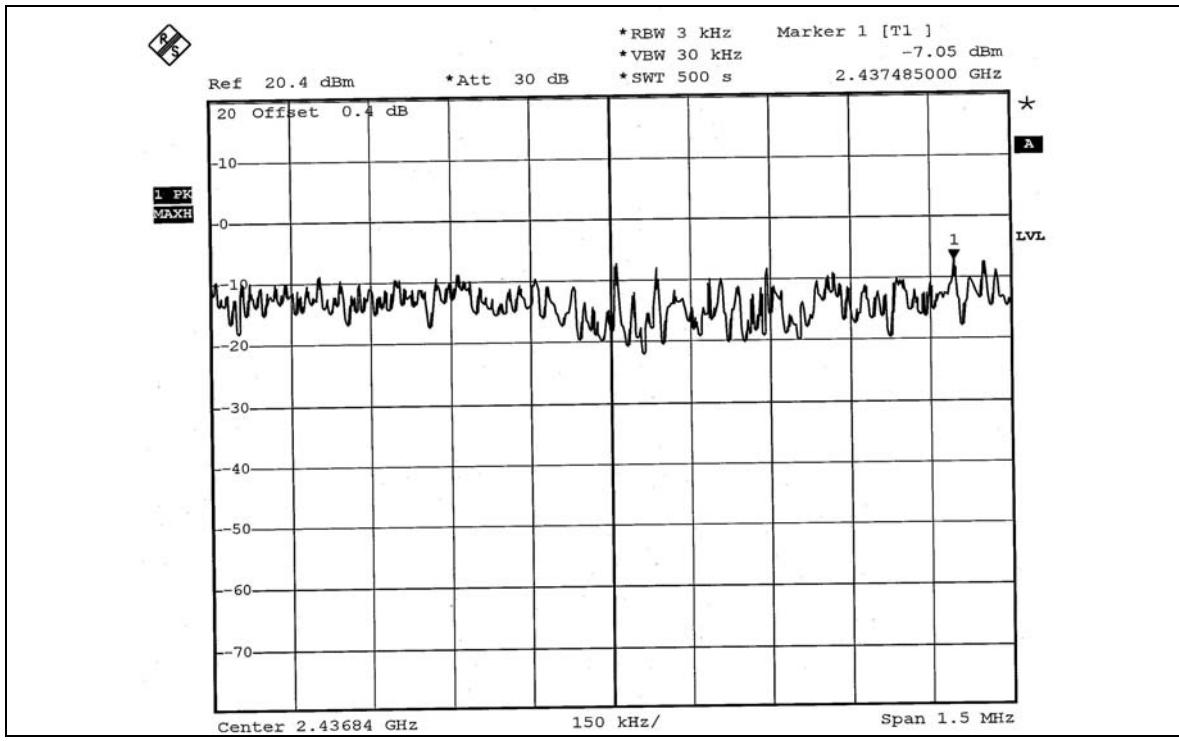

## CH11

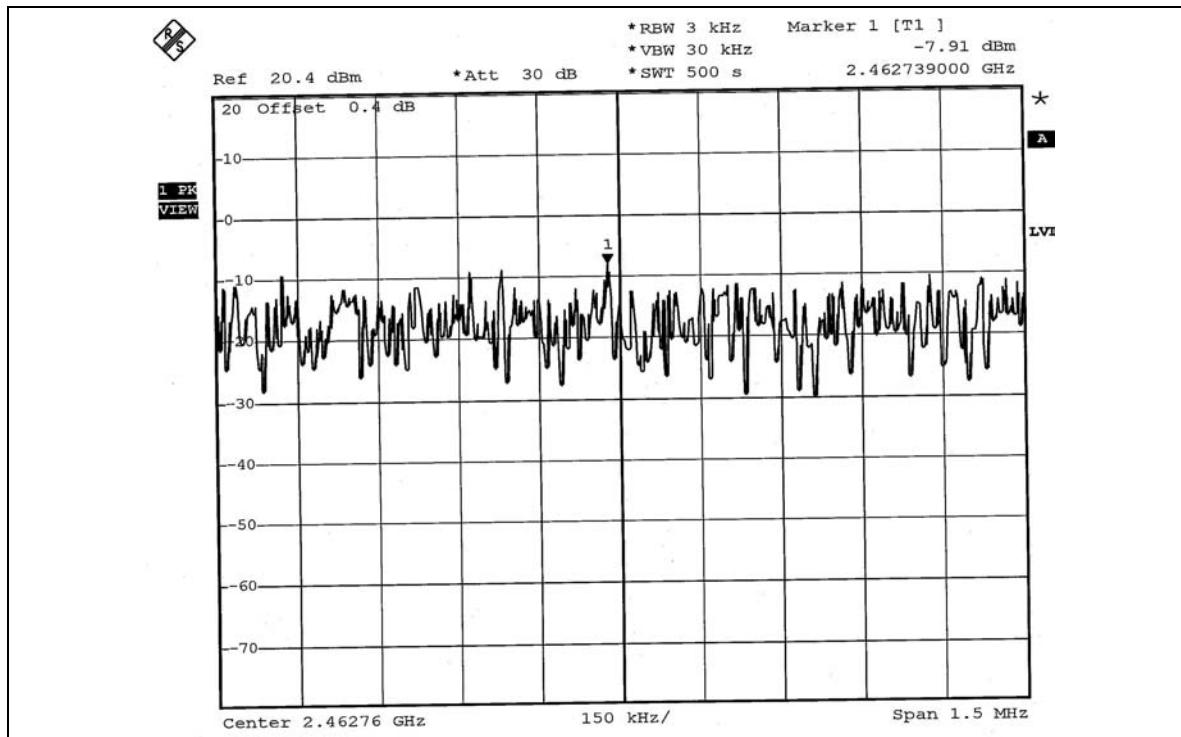

FCC ID: Q87-WAP54GX




### 802.11g OFDM MODULATION


<b>EUT</b>	Wireless-G Access Point with SRX	<b>MODEL</b>	WAP54GX
<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 64%RH, 991hPa
<b>TESTED BY</b>	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-14.97	8	PASS
6	2437	-9.52	8	PASS
11	2462	-12.76	8	PASS


## CH1

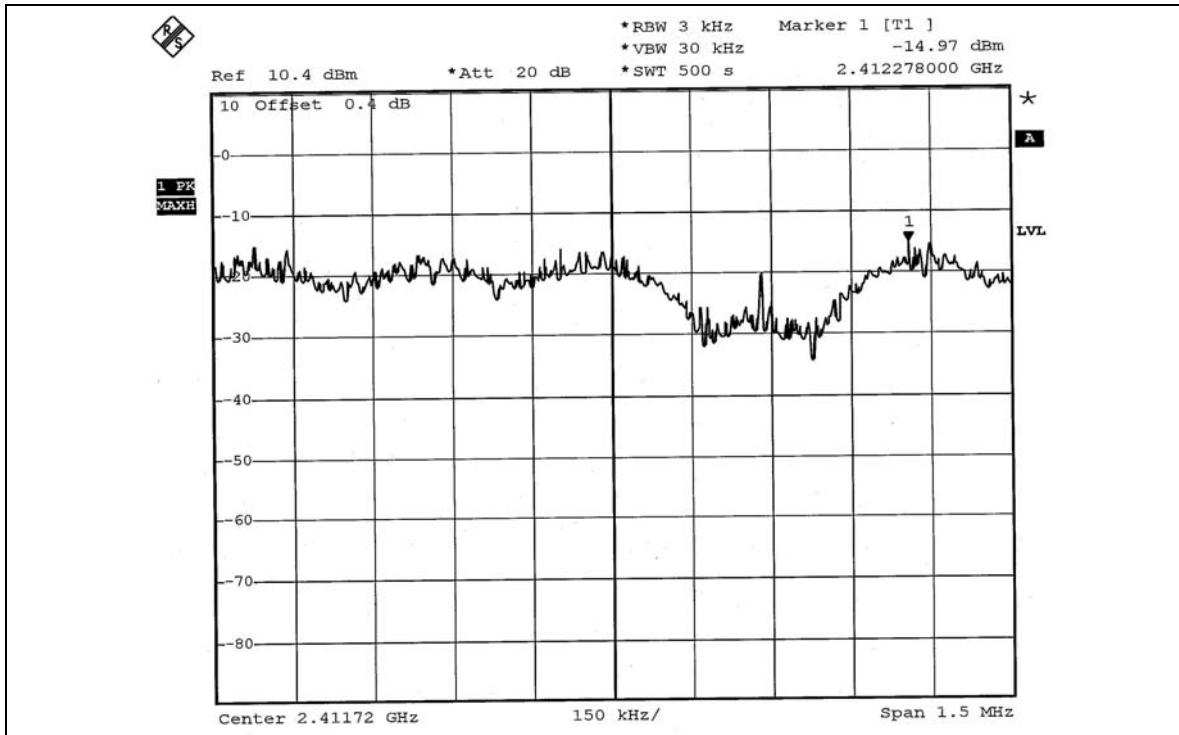

## CH6

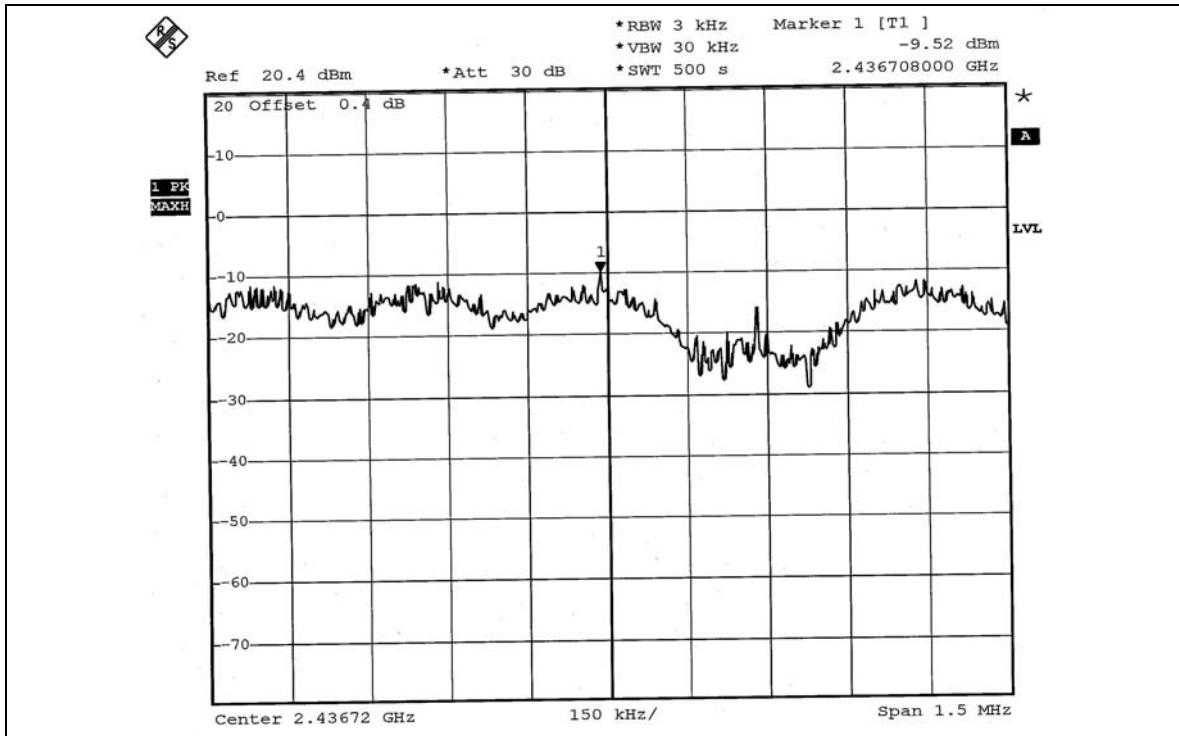

CH11

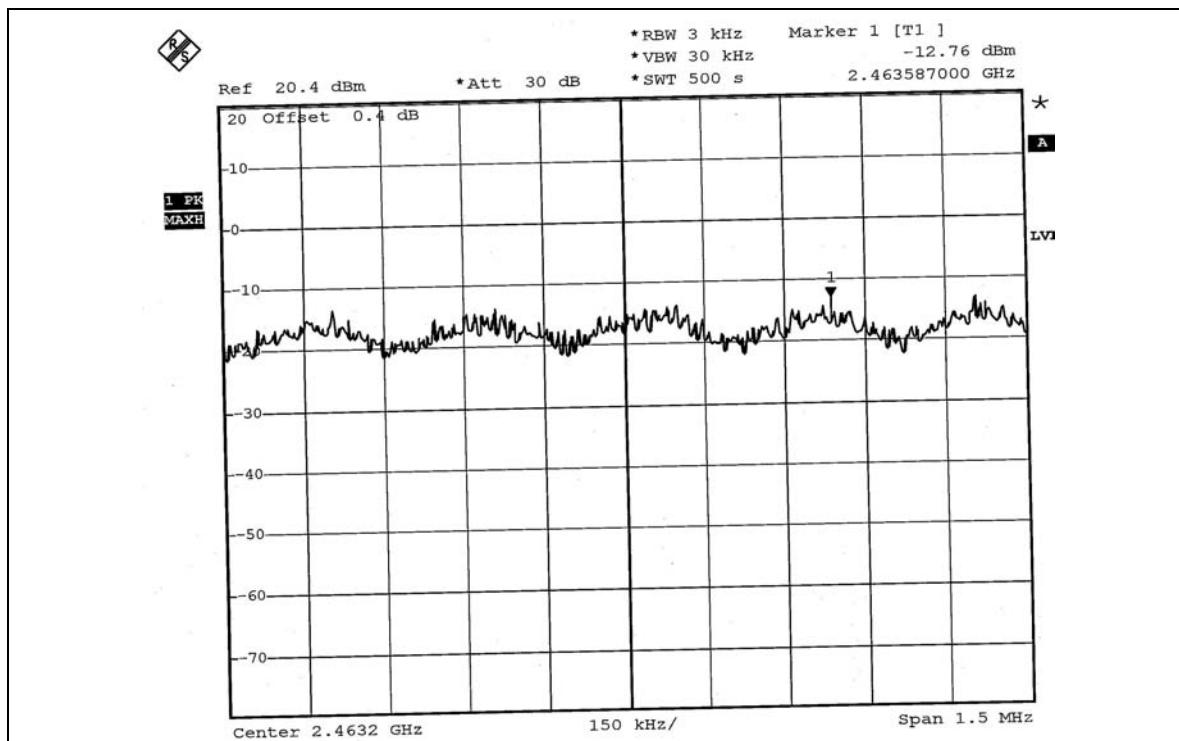

## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz; Average RBW=1MHz, VBW=1kHz) are attached on the following pages.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

#### 4.6.6 TEST RESULTS

The spectrum plots are attached on the following 18 images. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).



##### **802.11b DSSS MODULATION**



**NOTE 1:** The band edge emission plot on page 57 shows 50.44dBc between carrier maximum power and local maximum emission in restrict band (2.3886GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 112.19dBuV/m (Peak), so the maximum field strength in restrict band is  $112.19 - 50.44 = 61.75$ dBuV/m, which is under 74dBuV/m limit.



The band edge emission plot on page 57 shows 53.97dBc between carrier maximum power and local maximum emission in restrict band (2.3866GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 106.64dBuV/m (Average), so the maximum field strength in restrict band is  $106.64 - 53.97 = 52.67$ dBuV/m, which is under 54dBuV/m limit.

**NOTE 2:** The band edge emission plot on page 58 shows 52.78dBc between carrier maximum power and local maximum emission in restrict band (2.4876GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 112.96dBuV/m (Peak), so the maximum field strength in restrict band is  $112.96 - 52.78 = 60.18$ dBuV/m, which is under 74dBuV/m limit.

The band edge emission plot on page 59 shows 56.94dBc between carrier maximum power and local maximum emission in restrict band (2.4876GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 107.66dBuV/m (Average), so the maximum field strength in restrict band is  $107.66 - 56.94 = 50.72$ dBuV/m, which is under 54dBuV/m limit.

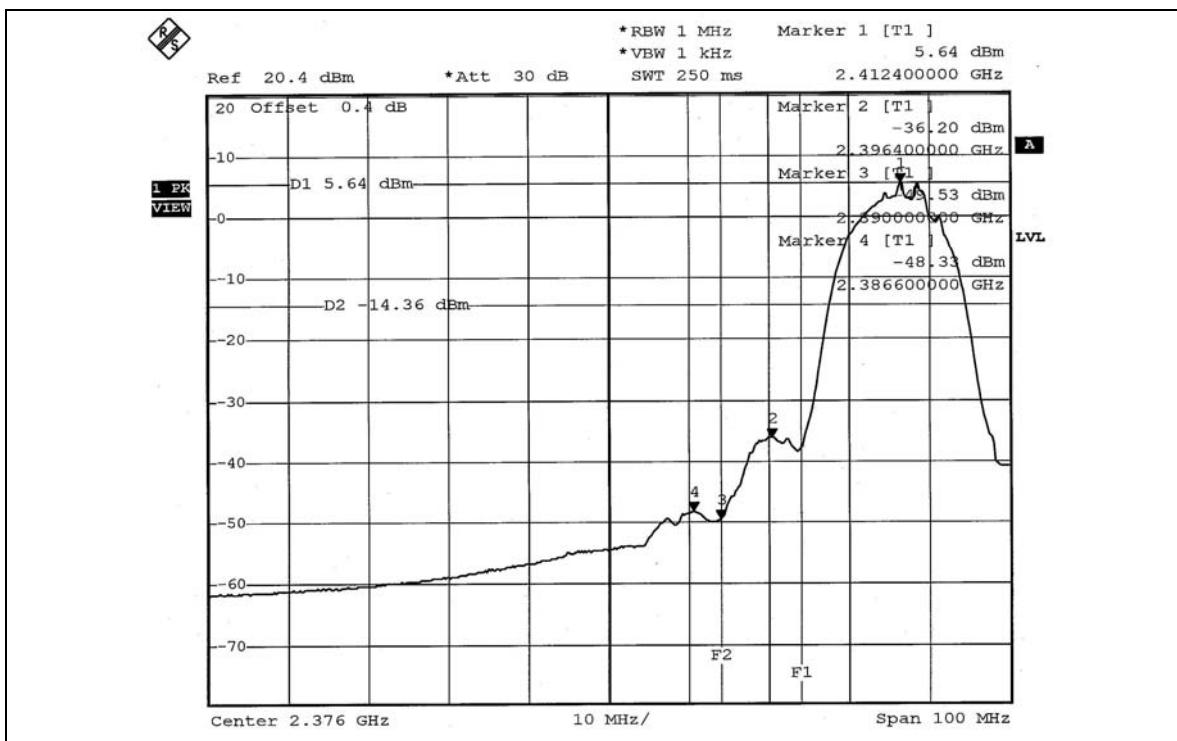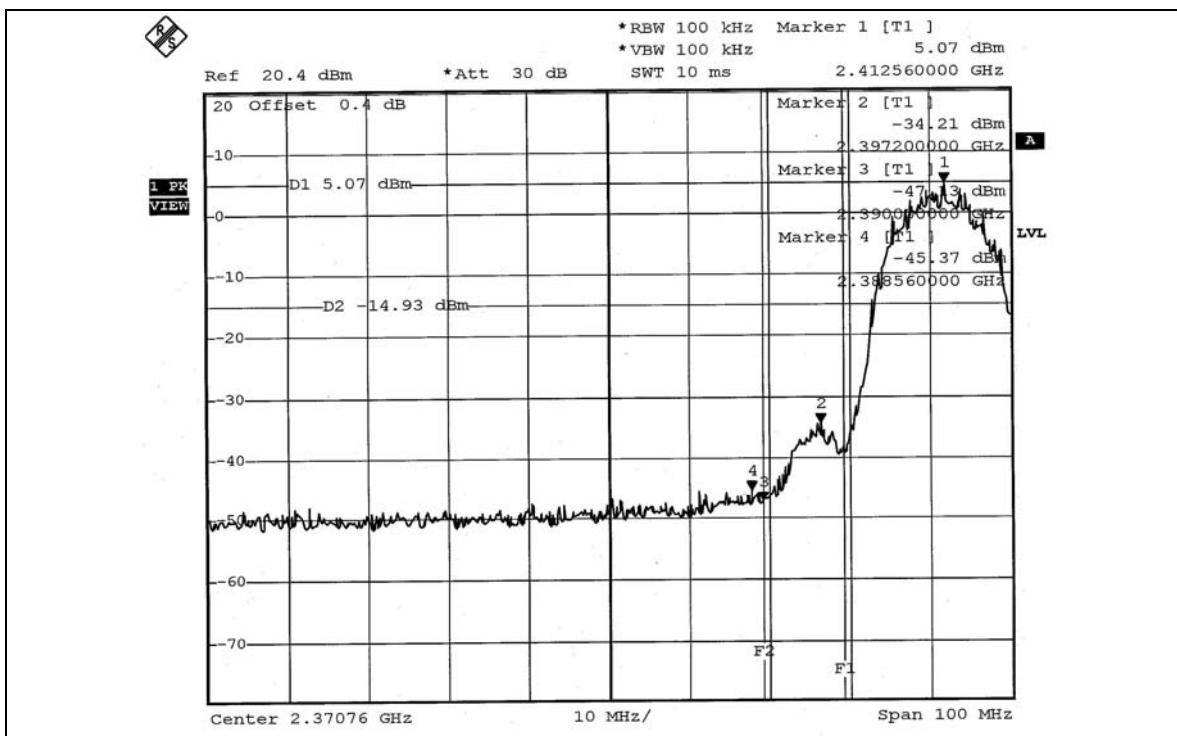

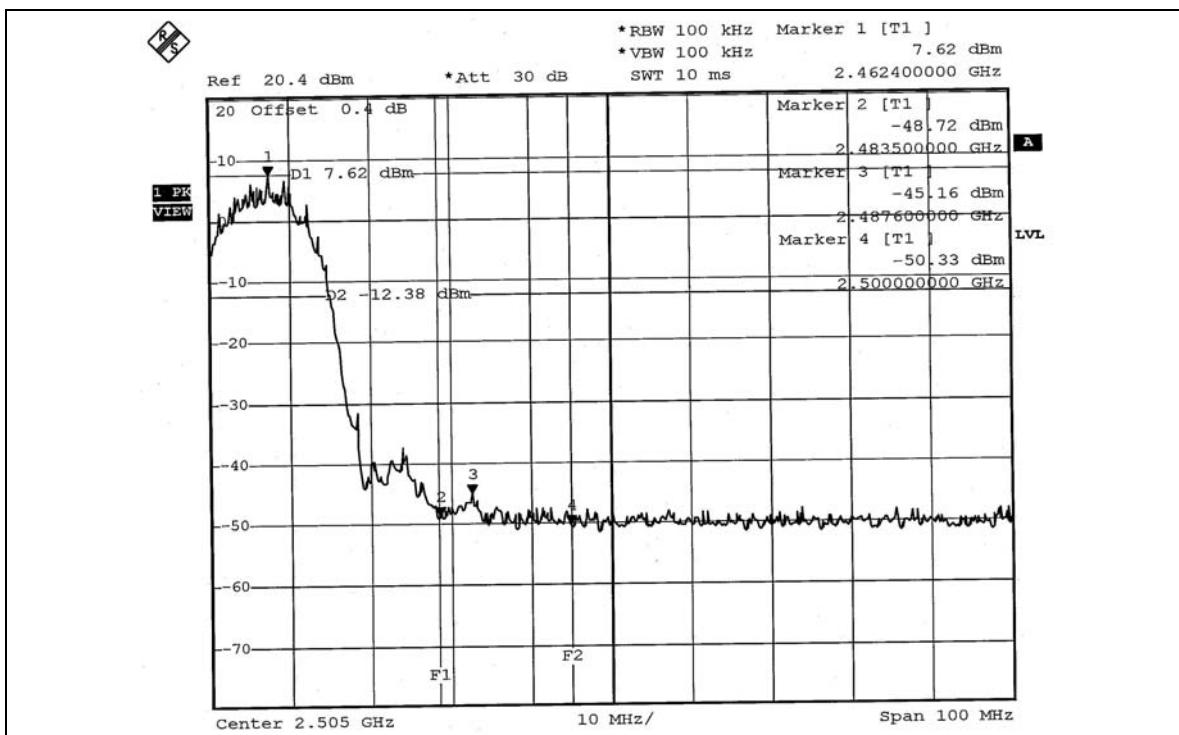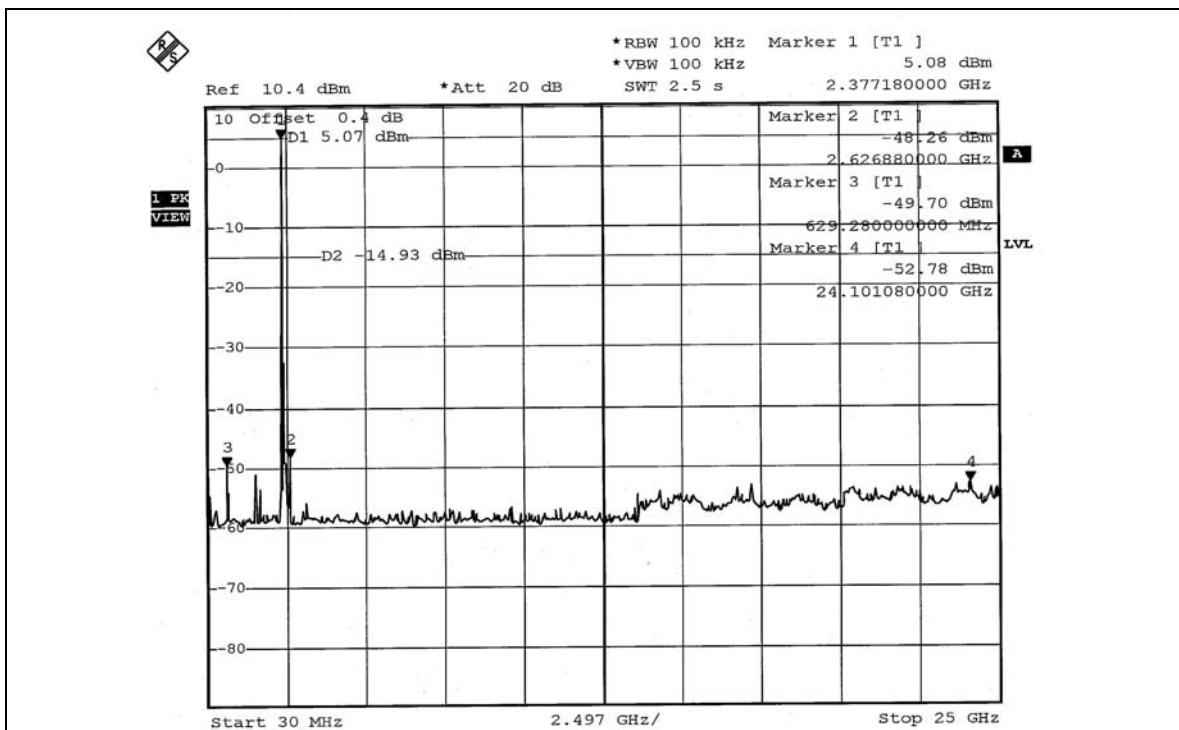

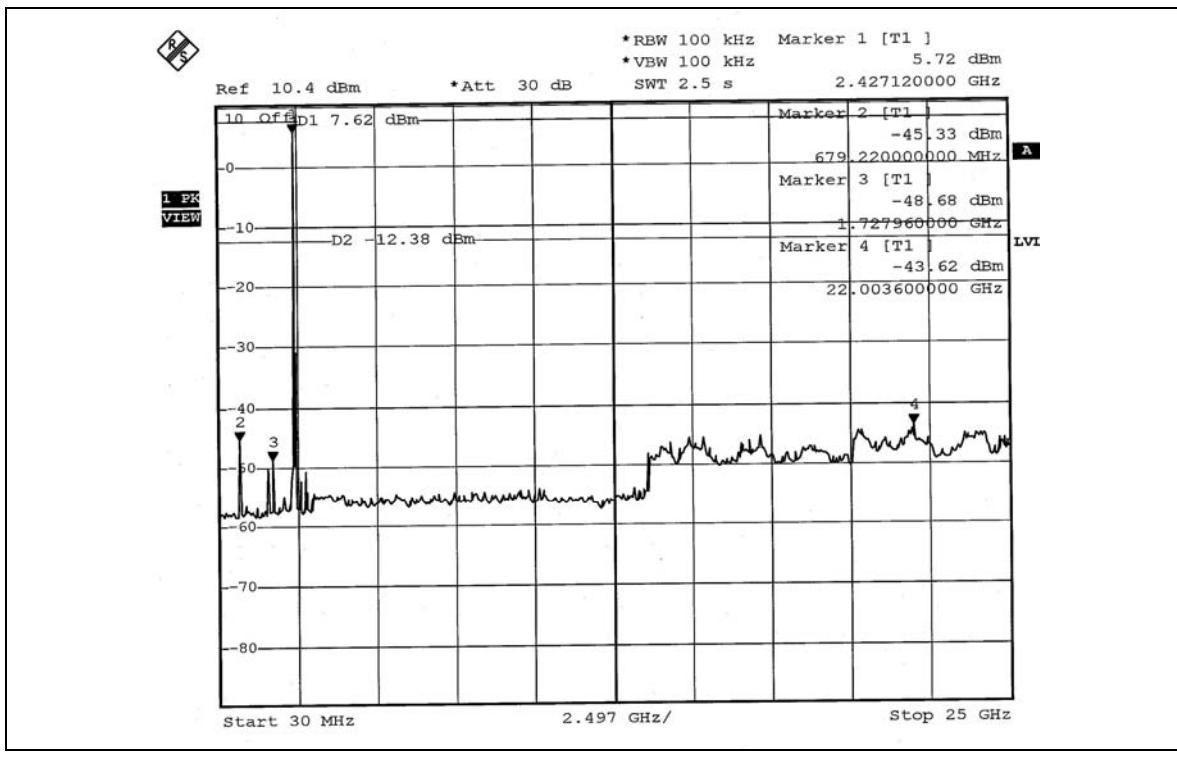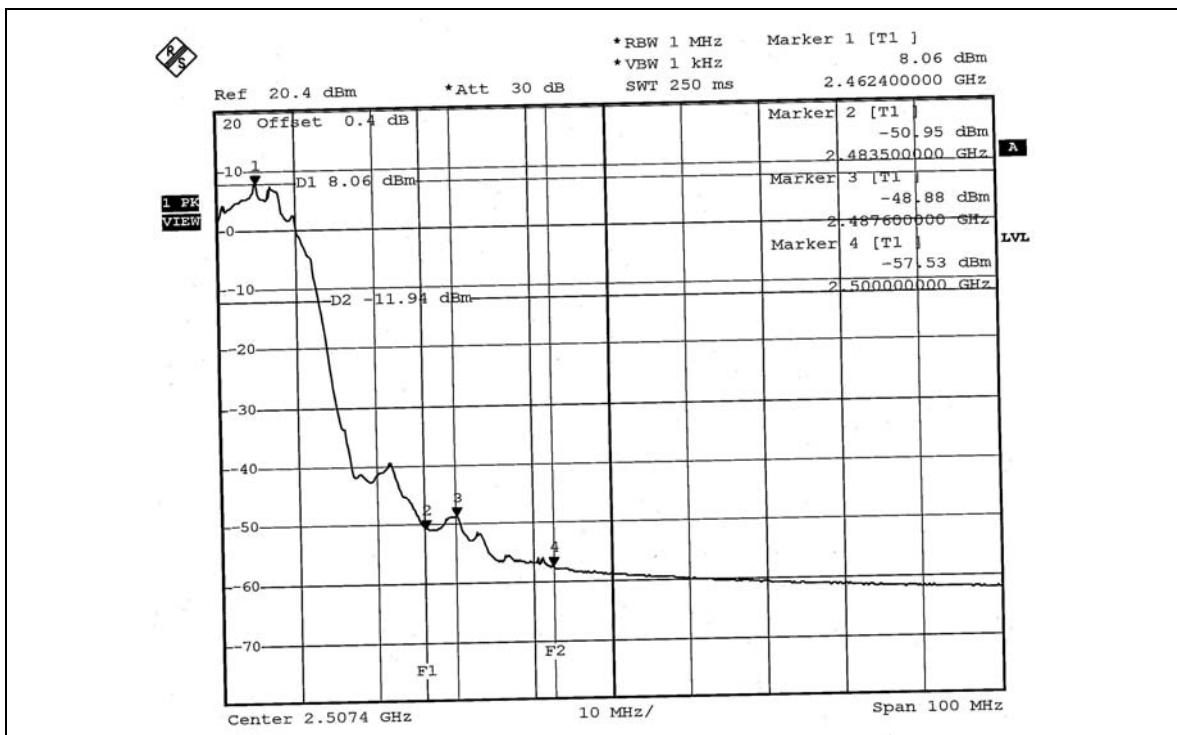



**802.11g OFDM MODULATION**



**NOTE 1:** The band edge emission plot on page 61 shows 42.25dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 106.74dBuV/m (Peak), so the maximum field strength in restrict band is  $106.74 - 42.25 = 64.49$ dBuV/m, which is under 74dBuV/m limit.



The band edge emission plot on page 61 shows 46.00dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 96.24dBuV/m (Average), so the maximum field strength in restrict band is  $96.24 - 46.00 = 50.24$ dBuV/m, which is under 54dBuV/m limit.

**NOTE 2:** The band edge emission plot on page 62 shows 46.02dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 110.74dBuV/m (Peak), so the maximum field strength in restrict band is  $110.74 - 46.02 = 64.72$ dBuV/m, which is under 74dBuV/m limit.

The band edge emission plot on page 63 shows 49.05dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 100.50dBuV/m (Average), so the maximum field strength in restrict band is  $100.50 - 49.05 = 51.45$ dBuV/m, which is under 54dBuV/m limit.

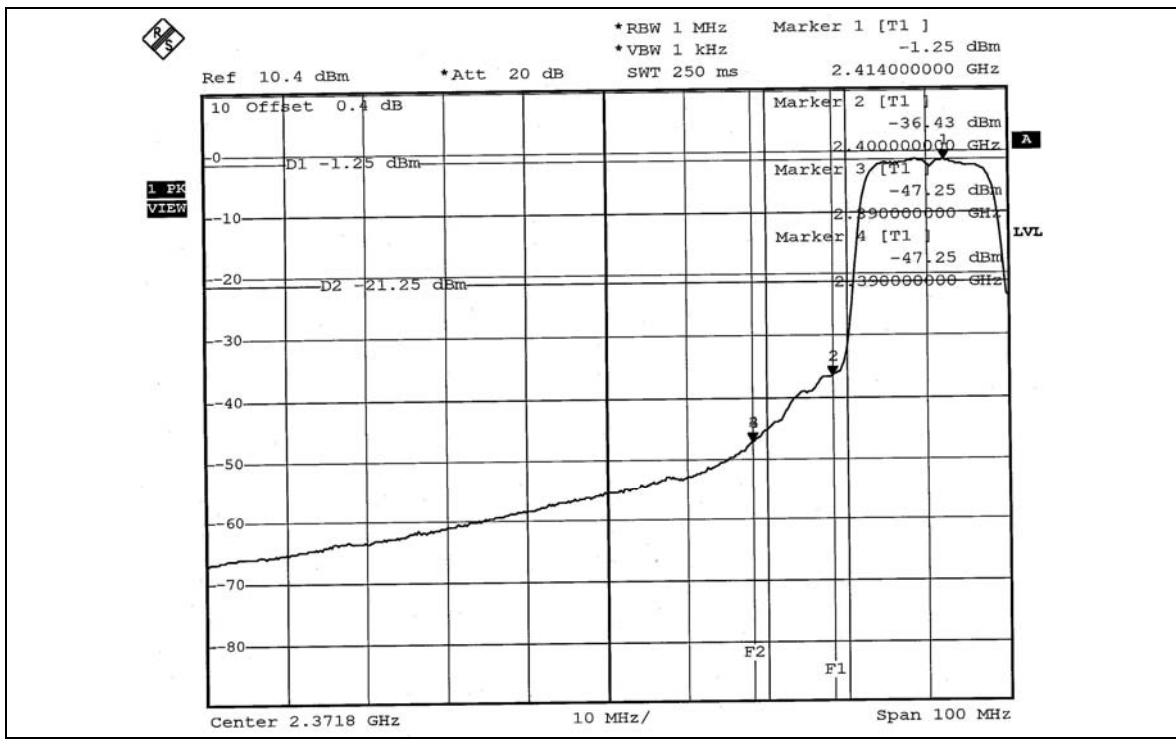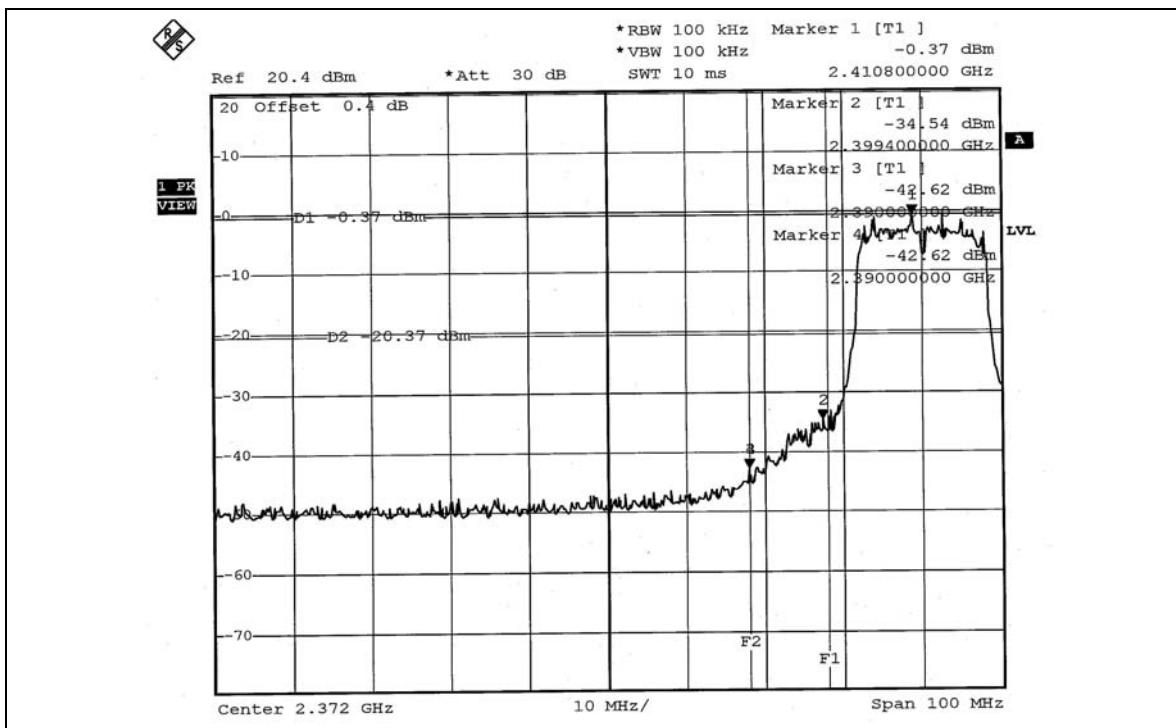

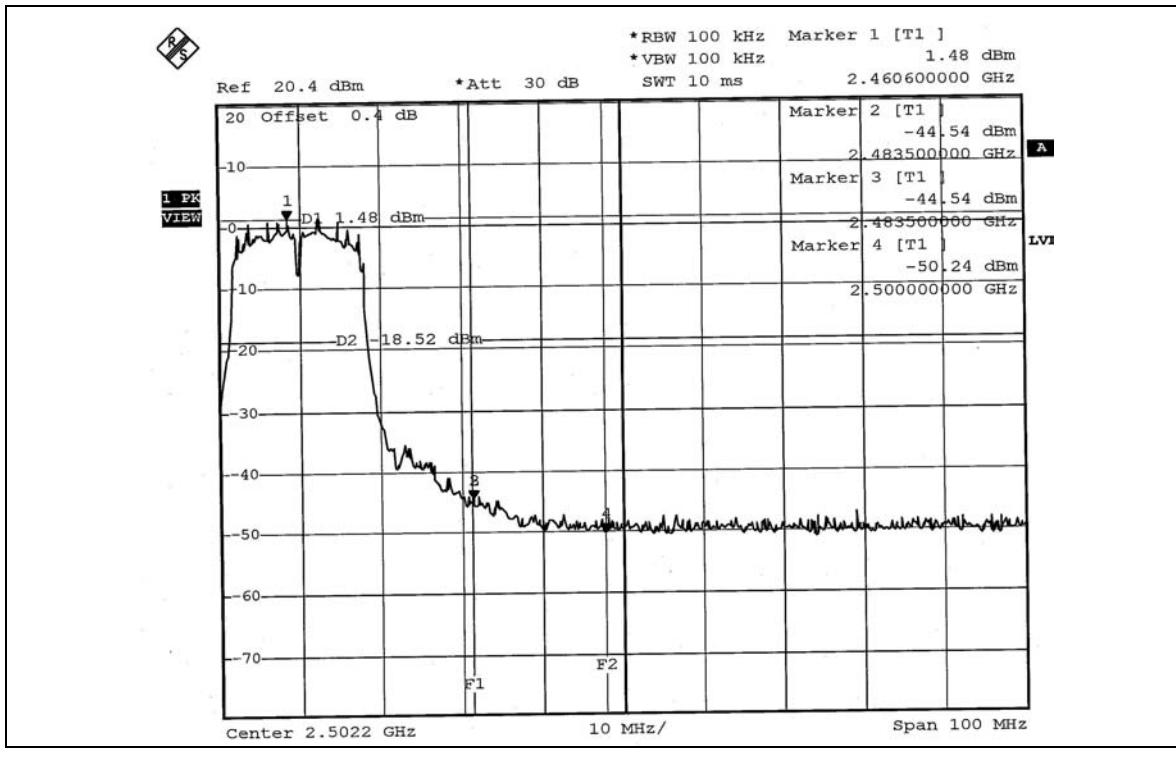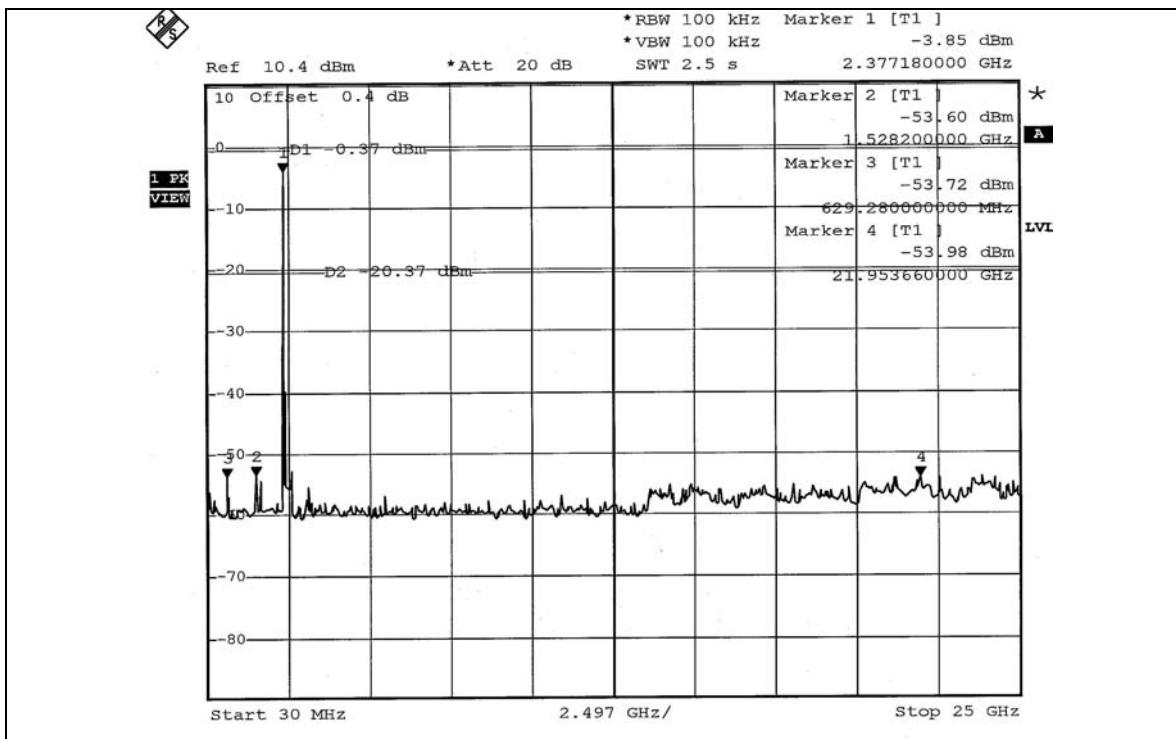

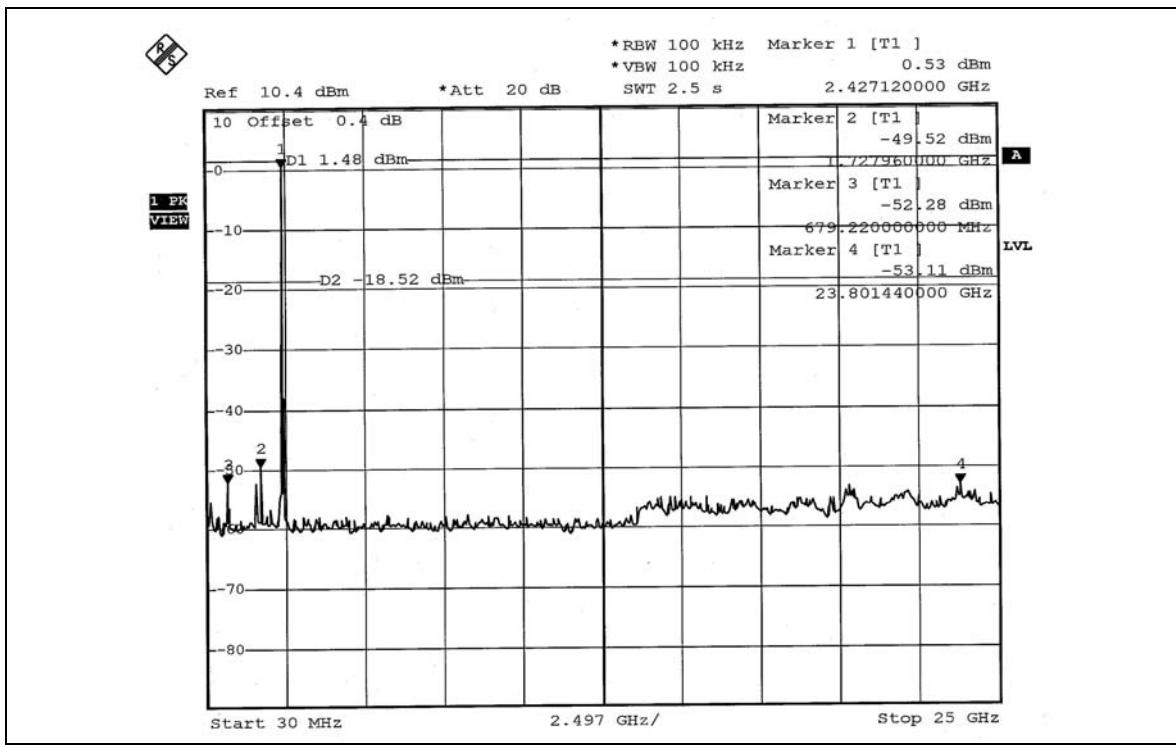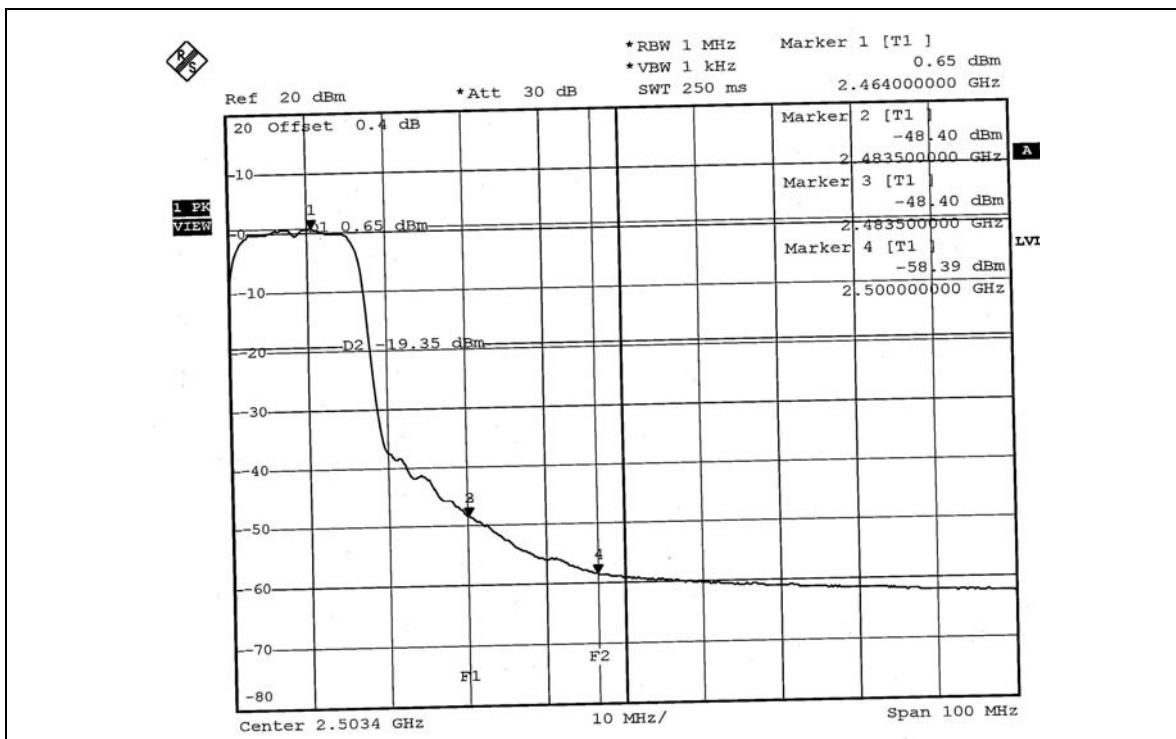

## 5. TEST TYPES AND RESULTS (For Dual CHAIN (TX))

### 5.1 CONDUCTED EMISSION MEASUREMENT

#### 5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 16, 2005
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 15, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Shielded Room 1.
  3. The VCCI Site Registration No. is C-2040.


### 5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

### 5.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.1.5 TEST SETUP

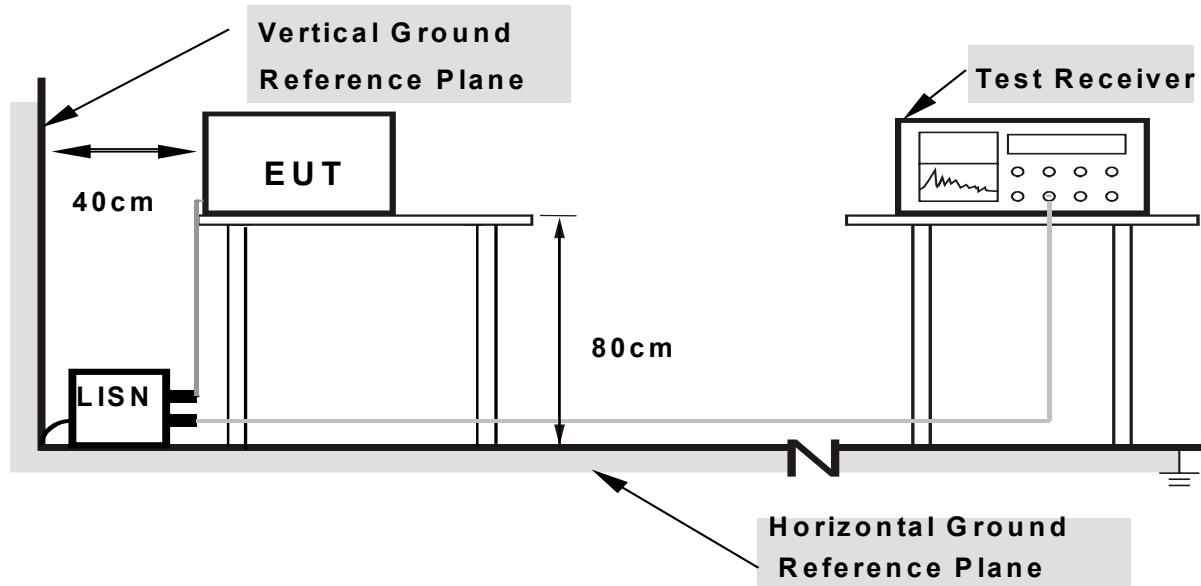

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 5.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on the testing table.
- Prepared another Notebook system to act as a communication partner and placed it outside of testing.
- The communication partner connected with EUT via "RJ45" cable and run a test program (provided by manufacturer) to enable EUT under transmission / receiving condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".


### 5.1.7 TEST RESULTS

#### CONDUCTED WORST CASE DATA

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>			
<b>MODEL</b>	WAP54GX		<b>PHASE</b>	Line 1	
<b>CHANNEL</b>	Channel 1		<b>6dB BANDWIDTH</b>	9 kHz	
<b>MODULATION TYPE</b>	16QAM		<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991hPa	
<b>TRANSFER RATE</b>	36Mbps		<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	
<b>TESTED BY</b>	Match Tsui				

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.11	52.28	2.52	52.39	23.63	65.59	55.59	-13.21	-31.97
2	0.322	0.11	46.89	21.71	47.00	21.82	59.66	49.66	-12.66	-27.84
3	0.959	0.23	26.00	-	26.23	-	56.00	-	-29.77	-
4	1.603	0.25	25.00	-	25.25	-	56.00	-	-30.75	-
5	11.086	0.54	45.26	36.28	45.80	36.82	60.00	50.00	-14.20	-13.18
6	14.469	0.55	40.81	30.83	41.36	31.38	60.00	50.00	-18.64	-18.62


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

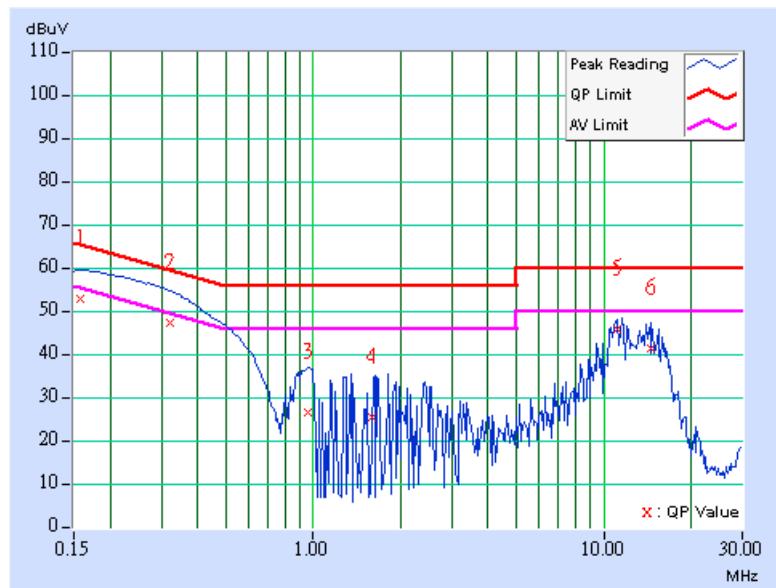

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	WAP54GX	<b>PHASE</b>	Line 2
<b>CHANNEL</b>	Channel 1	<b>6dB BANDWIDTH</b>	9 kHz
<b>MODULATION TYPE</b>	16QAM	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991hPa
<b>TRANSFER RATE</b>	36Mbps	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.160	0.11	53.04	24.32	53.15	24.43	65.44	55.44	-12.30	-31.02
2	0.322	0.11	50.85	23.45	50.96	23.56	59.65	49.65	-8.69	-26.09
3	0.963	0.23	39.26	15.86	39.49	16.09	56.00	46.00	-16.51	-29.91
4	1.925	0.26	30.98	-	31.24	-	56.00	-	-24.76	-
5	11.082	0.44	45.90	37.21	46.34	37.65	60.00	50.00	-13.66	-12.35
6	15.406	0.47	40.71	29.93	41.18	30.40	60.00	50.00	-18.82	-19.60

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

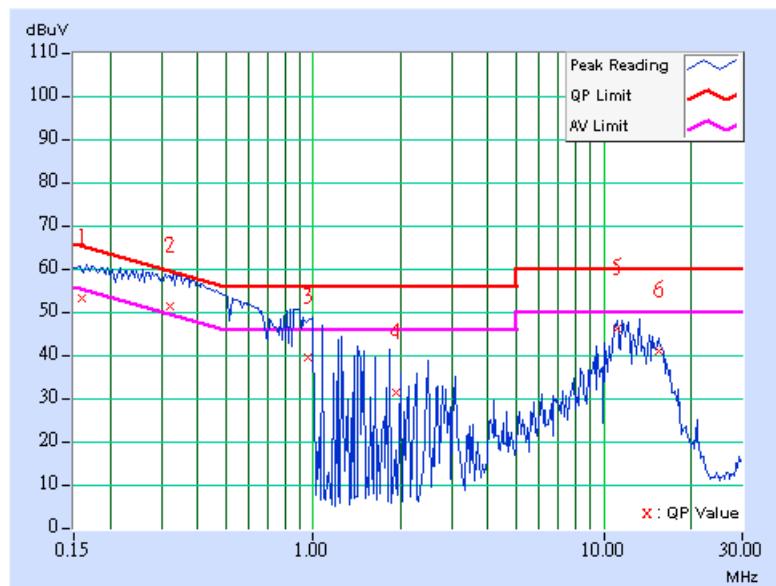


<b>EUT</b>	Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	WAP54GX	<b>PHASE</b>	Line 1
<b>CHANNEL</b>	Channel 6	<b>6dB BANDWIDTH</b>	9 kHz
<b>MODULATION TYPE</b>	16QAM	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991hPa
<b>TRANSFER RATE</b>	36Mbps	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.161	0.11	52.14	23.74	52.25	23.85	65.40	55.40	-13.15	-31.55
2	0.319	0.11	47.17	21.58	47.28	21.69	59.73	49.73	-12.45	-28.04
3	0.965	0.23	27.45	-	27.68	-	56.00	-	-28.32	-
4	1.608	0.25	26.90	-	27.15	-	56.00	-	-28.85	-
5	10.605	0.54	43.45	34.43	43.99	34.97	60.00	50.00	-16.01	-15.03
6	14.469	0.55	43.66	33.80	44.21	34.35	60.00	50.00	-15.79	-15.65

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

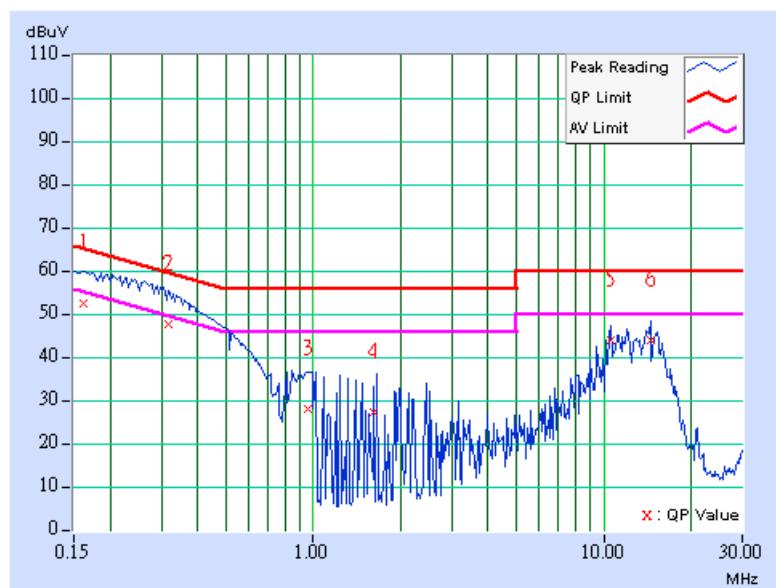


<b>EUT</b>	Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	WAP54GX	<b>PHASE</b>	Line 2
<b>CHANNEL</b>	Channel 6	<b>6dB BANDWIDTH</b>	9 kHz
<b>MODULATION TYPE</b>	16QAM	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991hPa
<b>TRANSFER RATE</b>	36Mbps	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.11	53.16	24.32	53.27	24.43	65.39	55.39	-12.12	-30.96
2	0.320	0.11	50.97	23.53	51.08	23.64	59.71	49.71	-8.63	-26.07
3	0.963	0.23	39.28	15.86	39.51	16.09	56.00	46.00	-16.49	-29.91
4	2.412	0.29	30.68	-	30.97	-	56.00	-	-25.03	-
5	11.086	0.44	45.92	36.88	46.36	37.32	60.00	50.00	-13.64	-12.68
6	14.942	0.45	44.60	34.57	45.05	35.02	60.00	50.00	-14.95	-14.98

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

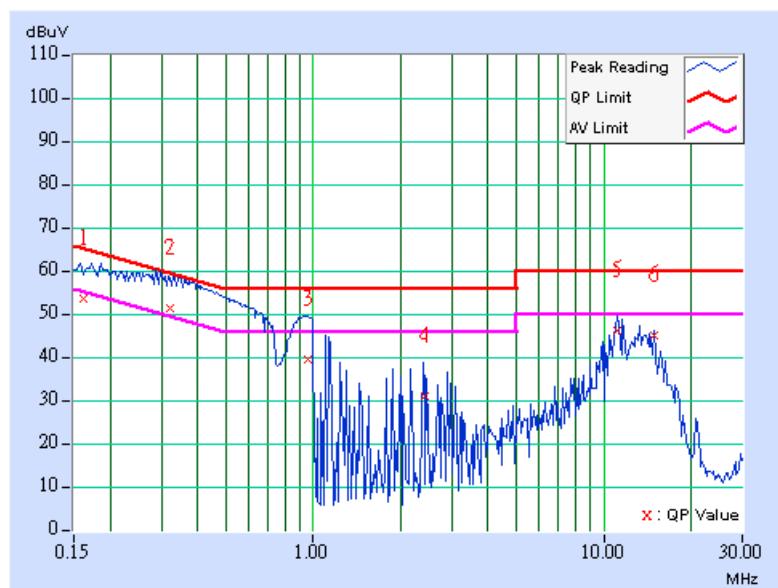

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	WAP54GX	<b>PHASE</b>	Line 1
<b>CHANNEL</b>	Channel 11	<b>6dB BANDWIDTH</b>	9 kHz
<b>MODULATION TYPE</b>	16QAM	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991hPa
<b>TRANSFER RATE</b>	36Mbps	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.11	52.18	23.59	52.29	23.70	65.37	55.37	-13.08	-31.67
2	0.321	0.11	47.17	21.76	47.28	21.87	59.68	49.68	-12.40	-27.81
3	0.966	0.23	27.51	-	27.74	-	56.00	-	-28.26	-
4	0.966	0.23	26.61	-	26.84	-	56.00	-	-29.16	-
5	12.211	0.54	43.61	34.69	44.15	35.23	60.00	50.00	-15.85	-14.77
6	14.469	0.55	43.84	33.86	44.39	34.41	60.00	50.00	-15.61	-15.59


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

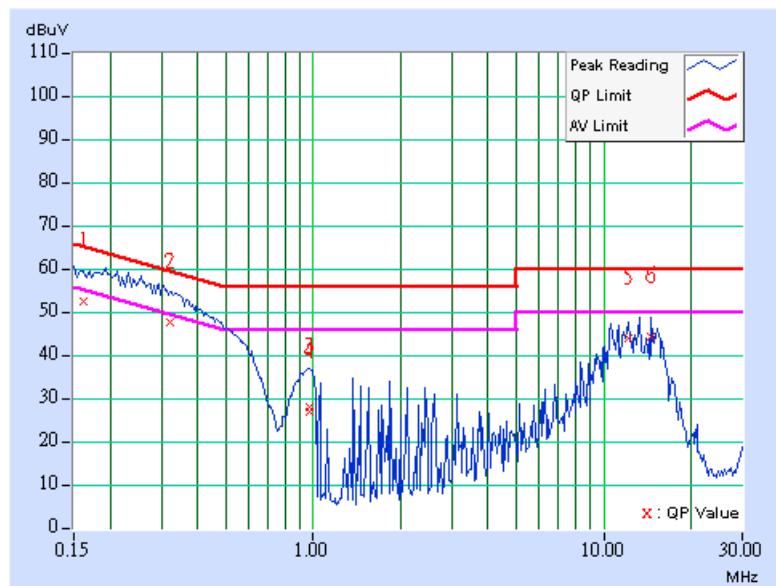

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	WAP54GX	<b>PHASE</b>	Line 2
<b>CHANNEL</b>	Channel 11	<b>6dB BANDWIDTH</b>	9 kHz
<b>MODULATION TYPE</b>	16QAM	<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 991hPa
<b>TRANSFER RATE</b>	36Mbps	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Match Tsui		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.159	0.11	53.30	24.39	53.41	24.50	65.50	55.50	-12.09	-31.00
2	0.321	0.11	51.17	23.67	51.28	23.78	59.68	49.68	-8.40	-25.90
3	0.963	0.23	39.95	16.08	40.18	16.31	56.00	46.00	-15.82	-29.69
4	1.766	0.26	32.87	-	33.13	-	56.00	-	-22.87	-
5	10.609	0.44	43.98	34.16	44.42	34.60	60.00	50.00	-15.58	-15.40
6	13.344	0.45	44.27	35.10	44.72	35.55	60.00	50.00	-15.28	-14.45

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

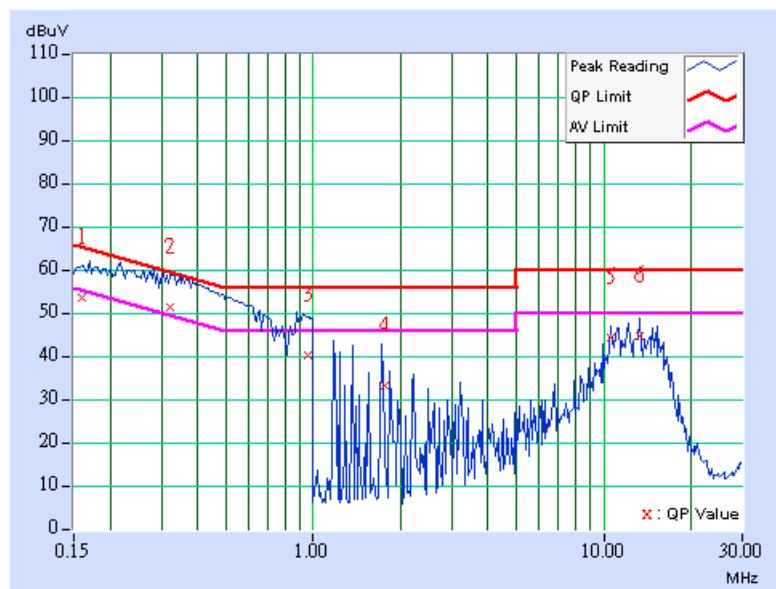

## 5.2 RADIATED EMISSION MEASUREMENT

### 5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>u</sub>V/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

### 5.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 19, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 21, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Jan. 22, 2006
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Jan. 16, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2006
Preamplifier Agilent	8449B	3008A01961	Nov. 09, 2005
Preamplifier Agilent	8447D	2944A10629	Nov. 09, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Feb. 17, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Feb. 17, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 1.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC4924-2.

### 5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.

#### 5.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 5.2.5 TEST SETUP

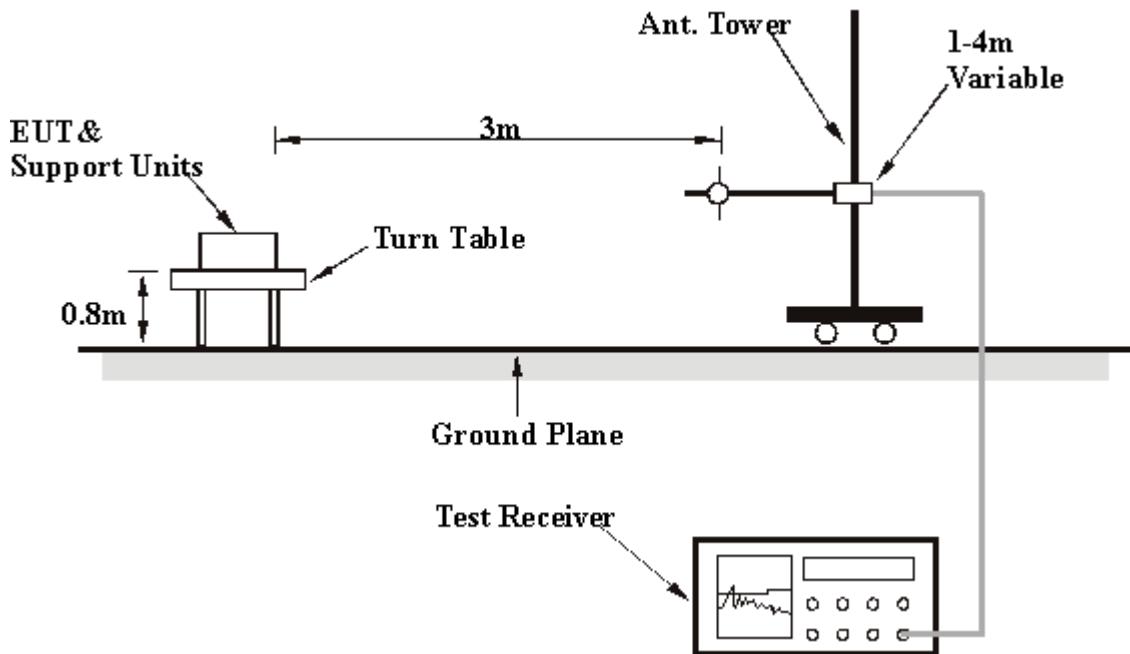

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 5.2.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared another Notebook system to act as a communication partner and placed it outside of testing.
- c. The communication partner connected with EUT via "RJ45" cable and run a test program (provided by manufacturer) to enable EUT under transmission / receiving condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".

### 5.2.7 TEST RESULTS

#### RADIATED WORST CASE DATA: 802.11g OFDM MODULATION

<b>EUT</b>		Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>		
<b>MODEL</b>		WAP54GX			<b>FREQUENCY RANGE</b>
<b>CHANNEL</b>		Channel 11			<b>DETECTOR FUNCTION</b>
<b>MODULATION TYPE</b>		16QAM			<b>ENVIRONMENTAL CONDITIONS</b>
<b>TRANSFER RATE</b>		36Mbps			<b>INPUT POWER (SYSTEM)</b>
<b>TESTED BY</b>		Match Tsui			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	61.10	26.96 QP	40.00	-13.04	1.50 H	190	13.63	13.33
2	109.70	35.88 QP	43.50	-7.62	1.50 H	232	24.14	11.74
3	144.69	29.12 QP	43.50	-14.38	1.00 H	55	14.80	14.32
4	197.17	32.35 QP	43.50	-11.15	1.25 H	358	21.00	11.35
5	241.88	35.15 QP	46.00	-10.85	1.00 H	109	22.20	12.95
6	280.76	35.10 QP	46.00	-10.90	1.00 H	256	21.03	14.07
7	348.80	29.66 QP	46.00	-16.34	1.00 H	100	14.23	15.43
8	420.72	33.45 QP	46.00	-12.55	1.75 H	223	16.28	17.16
9	560.68	30.97 QP	46.00	-15.03	1.50 H	340	11.09	19.88
10	599.56	29.23 QP	46.00	-16.77	1.50 H	325	8.35	20.88
11	632.61	33.62 QP	46.00	-12.38	1.00 H	67	12.28	21.35
12	702.59	29.51 QP	46.00	-16.49	1.00 H	88	7.20	22.31
13	751.18	34.41 QP	46.00	-11.59	1.00 H	31	10.99	23.42
14	908.64	41.86 QP	46.00	-4.14	1.75 H	88	16.66	25.19

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>	
<b>MODEL</b>	WAP54GX	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>CHANNEL</b>	Channel 11	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>MODULATION TYPE</b>	16QAM	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 45%RH, 991hPa
<b>TRANSFER RATE</b>	36Mbps	<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz
<b>TESTED BY</b>	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.16	37.89 QP	40.00	-2.11	1.00 V	133	24.35	13.54
2	94.15	27.22 QP	43.50	-16.28	1.00 V	310	16.94	10.28
3	138.86	31.22 QP	43.50	-12.28	1.25 V	115	17.08	14.13
4	195.23	32.68 QP	43.50	-10.82	1.00 V	205	21.17	11.51
5	241.88	29.85 QP	46.00	-16.15	1.25 V	217	16.91	12.95
6	278.82	35.79 QP	46.00	-10.21	2.00 V	82	21.78	14.01
7	420.72	33.75 QP	46.00	-12.25	1.25 V	214	16.59	17.16
8	560.68	29.84 QP	46.00	-16.16	1.00 V	274	9.96	19.88
9	628.72	29.02 QP	46.00	-16.98	1.00 V	253	7.73	21.29
10	700.64	33.92 QP	46.00	-12.08	1.75 V	46	11.66	22.26
11	751.18	31.41 QP	46.00	-14.59	1.50 V	64	7.99	23.42

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

<b>EUT</b>		Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>		
<b>MODEL</b>		WAP54GX	<b>FREQUENCY RANGE</b>		1 ~ 25GHz
<b>CHANNEL</b>		Channel 1	<b>DETECTOR FUNCTION</b>		Peak (PK) Average (AV)
<b>MODULATION TYPE</b>		16QAM	<b>ENVIRONMENTAL CONDITIONS</b>		25deg. C, 70%RH, 991hPa
<b>TRANSFER RATE</b>		36Mbps	<b>INPUT POWER (SYSTEM)</b>		120Vac, 60 Hz
<b>TESTED BY</b>		Match Tsui			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1680.00	43.37 PK	74.00	-30.63	1.21 H	179	15.26	28.10
1	1680.00	36.36 AV	54.00	-17.64	1.21 H	179	8.25	28.10
2	2390.00	54.15 PK	74.00	-19.85	1.49 H	358	23.18	30.97
2	2390.00	44.80 AV	54.00	-9.20	1.49 H	358	13.83	30.97
3	*2412.00	101.45 PK			1.49 H	358	70.39	31.06
3	*2412.00	92.10 AV			1.49 H	358	61.04	31.06
4	4824.00	45.10 PK	74.00	-28.90	1.18 H	21	8.67	36.43
4	4824.00	32.58 AV	54.00	-21.42	1.18 H	21	-3.85	36.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1680.00	47.09 PK	74.00	-26.91	1.00 V	162	18.98	28.10
1	1680.00	42.11 AV	54.00	-11.89	1.00 V	162	14.00	28.10
2	2052.00	54.10 PK	74.00	-19.90	1.05 V	194	24.52	29.58
2	2052.00	38.78 AV	54.00	-15.22	1.05 V	194	9.20	29.58
3	2390.00	64.17 PK	74.00	-9.83	1.11 V	348	33.20	30.97
3	2390.00	51.40 AV	54.00	-2.60	1.11 V	348	20.43	30.97
4	*2412.00	113.21 PK			1.11 V	348	82.15	31.06
4	*2412.00	101.30 AV			1.11 V	348	70.24	31.06
5	2628.00	56.14 PK	74.00	-17.86	1.20 V	104	24.44	31.70
5	2628.00	47.05 AV	54.00	-6.95	1.20 V	104	15.35	31.70
6	4824.00	47.74 PK	74.00	-26.26	1.07 V	24	11.31	36.43
6	4824.00	34.97 AV	54.00	-19.03	1.07 V	24	-1.46	36.43

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “\*”: Fundamental frequency.

<b>EUT</b>		Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>		
<b>MODEL</b>		WAP54GX	<b>FREQUENCY RANGE</b>		1 ~ 25GHz
<b>CHANNEL</b>		Channel 6	<b>DETECTOR FUNCTION</b>		Peak (PK) Average (AV)
<b>MODULATION TYPE</b>		16QAM	<b>ENVIRONMENTAL CONDITIONS</b>		25deg. C, 70%RH, 991hPa
<b>TRANSFER RATE</b>		36Mbps	<b>INPUT POWER (SYSTEM)</b>		120Vac, 60 Hz
<b>TESTED BY</b>		Match Tsui			

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1740.00	45.96 PK	74.00	-28.04	1.18 H	175	17.75	28.21
1	1740.00	40.58 AV	54.00	-13.42	1.18 H	175	12.37	28.21
2	*2437.00	105.47 PK			1.08 H	168	74.30	31.17
2	*2437.00	95.83 AV			1.08 H	168	64.66	31.17
3	4874.00	45.12 PK	74.00	-28.88	1.20 H	163	8.58	36.54
3	4874.00	32.82 AV	54.00	-21.18	1.20 H	163	-3.72	36.54

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1740.00	47.93 PK	74.00	-26.07	1.00 V	257	19.72	28.21
1	1740.00	42.50 AV	54.00	-11.50	1.00 V	257	14.29	28.21
2	2050.00	64.84 PK	74.00	-9.16	1.29 V	360	35.27	29.57
2	2050.00	41.02 AV	54.00	-12.98	1.29 V	360	11.45	29.57
3	*2437.00	115.73 PK			1.08 V	114	84.56	31.17
3	*2437.00	105.20 AV			1.08 V	114	74.03	31.17
4	2784.00	56.34 PK	74.00	-17.66	1.13 V	100	24.38	31.96
4	2784.00	46.50 AV	54.00	-7.50	1.13 V	100	14.54	31.96
5	4874.00	50.30 PK	74.00	-23.70	1.05 V	28	13.76	36.54
5	4874.00	37.93 AV	54.00	-16.07	1.05 V	28	1.39	36.54

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).

2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. The other emission levels were very low against the limit.

4. Margin value = Emission level – Limit value.

5. “\*”: Fundamental frequency.

<b>EUT</b>		Wireless-G Access Point with SRX	<b>MEASUREMENT DETAIL</b>		
<b>MODEL</b>		WAP54GX	<b>FREQUENCY RANGE</b>		1 ~ 25GHz
<b>CHANNEL</b>		Channel 11	<b>DETECTOR FUNCTION</b>		Peak (PK) Average (AV)
<b>MODULATION TYPE</b>		16QAM	<b>ENVIRONMENTAL CONDITIONS</b>		25deg. C, 70%RH, 991hPa
<b>TRANSFER RATE</b>		36Mbps	<b>INPUT POWER (SYSTEM)</b>		120Vac, 60 Hz
<b>TESTED BY</b>		Match Tsui			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1760.00	45.33 PK	74.00	-28.67	1.18 H	164	17.09	28.24
1	1760.00	40.99 AV	54.00	-13.01	1.18 H	164	12.75	28.24
2	*2462.00	102.87 PK			1.24 H	12	71.59	31.28
2	*2462.00	92.66 AV			1.24 H	12	61.38	31.28
3	2483.50	60.93 PK	74.00	-13.07	1.24 H	12	29.56	31.37
3	2483.50	47.47 AV	54.00	-6.53	1.24 H	12	16.10	31.37
4	4924.00	45.20 PK	74.00	-28.80	1.20 H	12	8.54	36.66
4	4924.00	32.65 AV	54.00	-21.35	1.20 H	12	-4.01	36.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1760.00	46.81 PK	74.00	-27.19	1.27 V	205	18.57	28.24
1	1760.00	43.16 AV	54.00	-10.84	1.27 V	205	14.92	28.24
2	2049.00	69.17 PK	74.00	-4.83	1.00 V	204	39.60	29.57
2	2049.00	42.06 AV	54.00	-11.94	1.00 V	204	12.49	29.57
3	*2462.00	112.72 PK			1.11 V	6	81.44	31.28
3	*2462.00	101.74 AV			1.11 V	6	70.46	31.28
4	2483.50	66.57 PK	74.00	-7.43	1.11 V	6	35.20	31.37
4	<b>2483.50</b>	<b>52.30 AV</b>	<b>54.00</b>	<b>-1.70</b>	<b>1.11 V</b>	<b>6</b>	<b>20.93</b>	<b>31.37</b>
5	4924.00	47.92 PK	74.00	-26.08	1.17 V	309	11.26	36.66
5	4924.00	35.23 AV	54.00	-18.77	1.17 V	309	-1.43	36.66

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
  2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “\*”: Fundamental frequency.

### 5.3 6dB BANDWIDTH MEASUREMENT

#### 5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 5.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 5.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### 5.3.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

### 5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the Dual Chain of the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 5. 3.7 TEST RESULTS


#### 802.11g OFDM MODULATION

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MODEL</b>	WAP54GX
<b>MODULATION TYPE</b>	16QAM	<b>TRANSFER RATE</b>	36Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 64%RH, 991hPa
<b>TESTED BY</b>	Match Tsui		


<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>		<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
		<b>CHAIN 0</b>	<b>CHAIN 1</b>		
1	2412	15.20	15.20	0.5	PASS
6	2437	15.20	15.20	0.5	PASS
11	2462	15.20	15.20	0.5	PASS

## FOR CHAIN 0:


## CH1

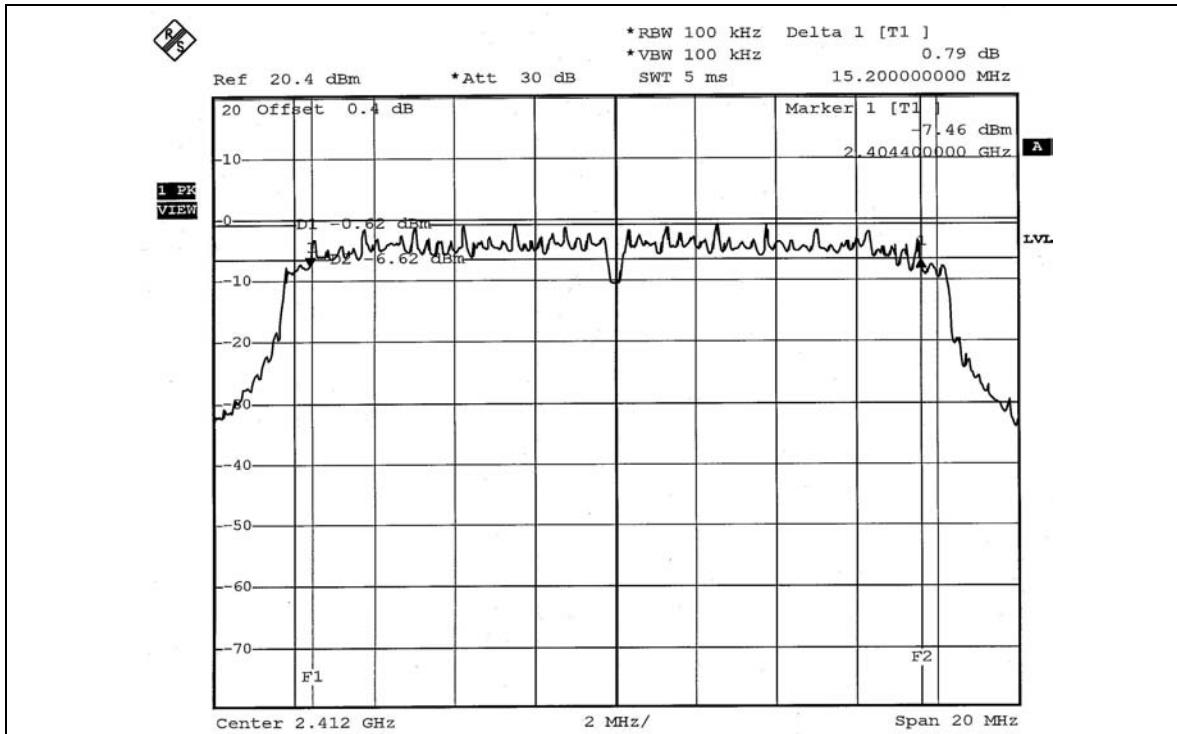

## CH6

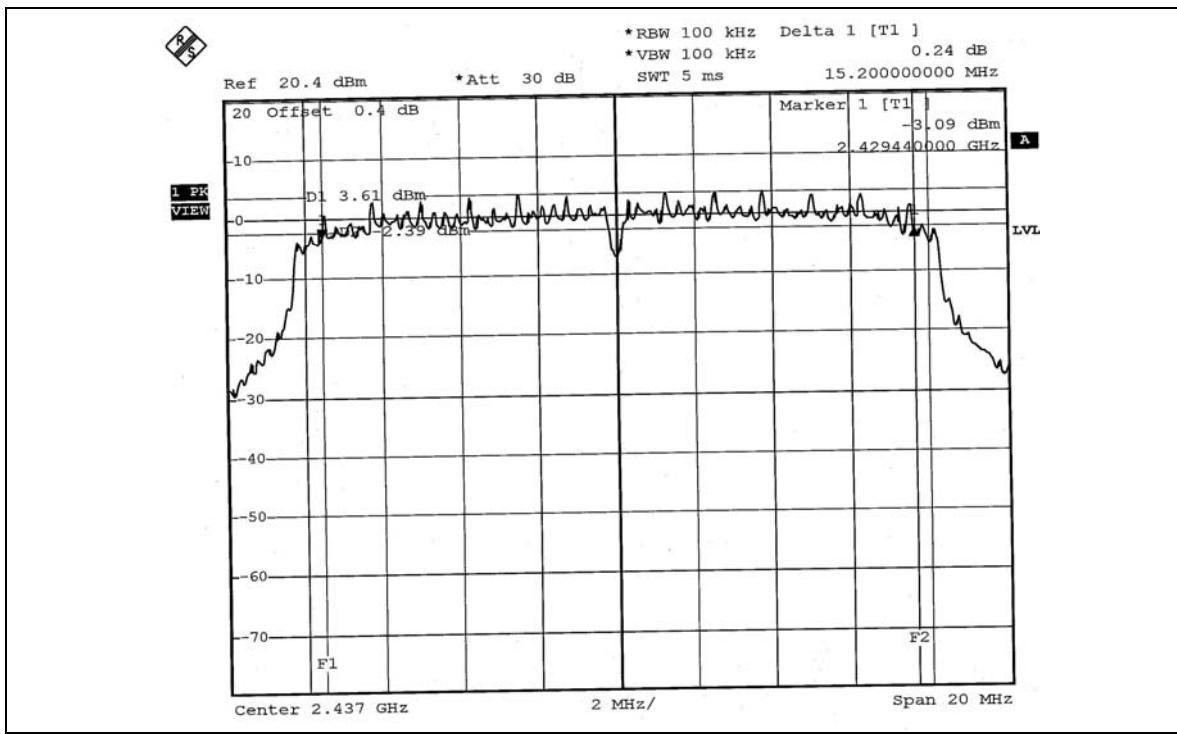


## CH11

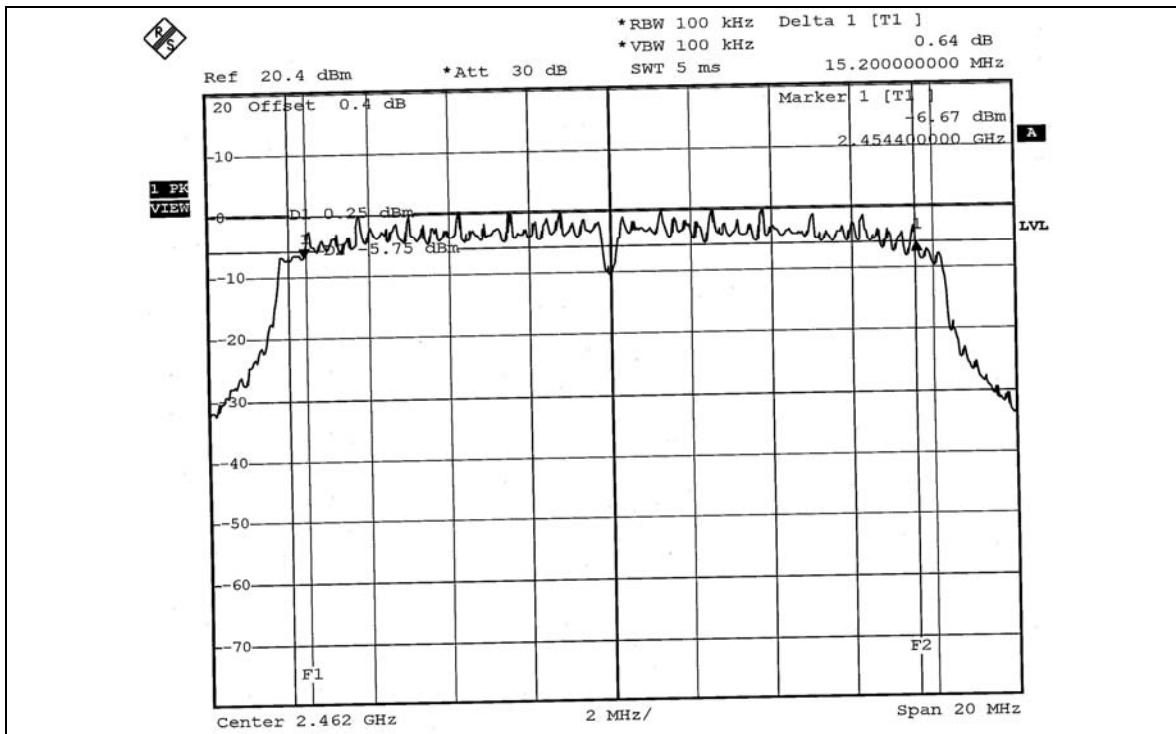


## FOR CHAIN 1:


## CH1

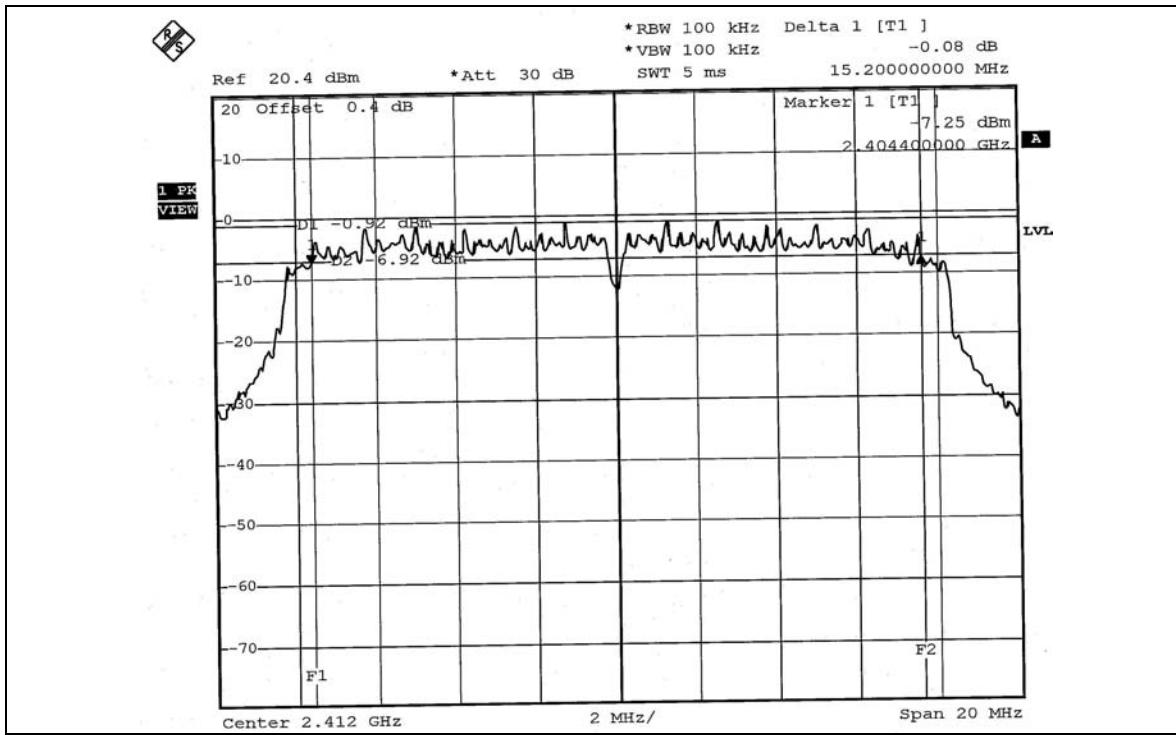

## CH6

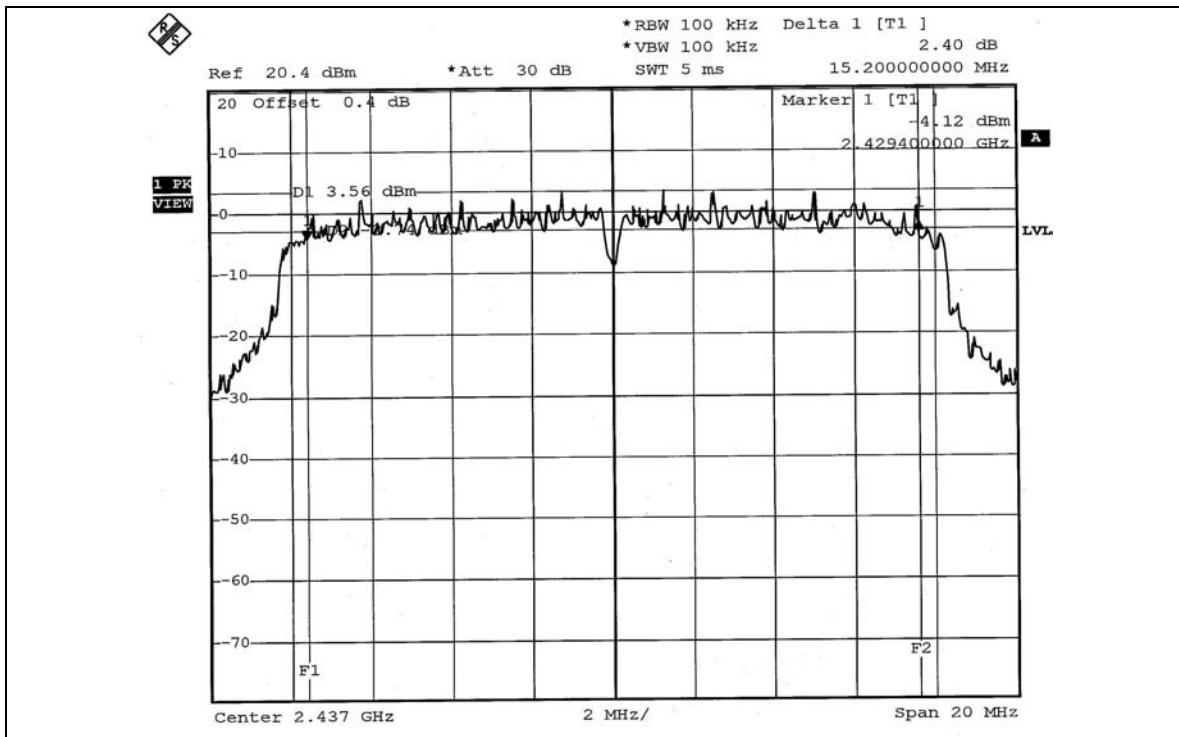

## CH11

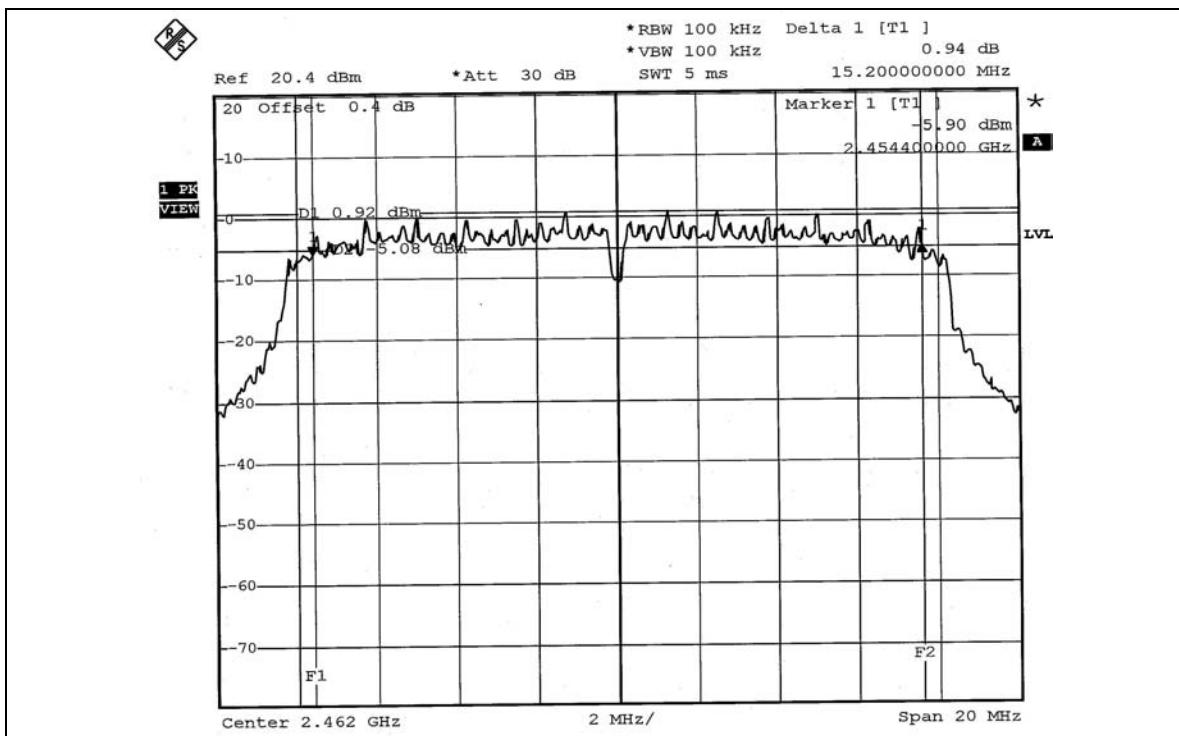

## 5.4 MAXIMUM PEAK OUTPUT POWER

### 5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

### 5.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 06, 2005
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 5.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

#### 5.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 5.4.5 TEST SETUP



#### 5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6

### 5.4.7 TEST RESULTS

#### 802.11g OFDM MODULATION

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MODEL</b>	WAP54GX
<b>MODULATION TYPE</b>	16QAM	<b>TRANSFER RATE</b>	36Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 64%RH, 991hPa
<b>TESTED BY</b>	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	28.510	28.249	14.55	14.51	56.759	17.54	30	PASS
6	2437	50.933	50.234	17.07	17.01	101.167	20.05	30	PASS
11	2462	40.365	40.272	16.06	16.05	80.637	19.07	30	PASS

## 5.5 POWER SPECTRAL DENSITY MEASUREMENT

### 5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 5.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 5.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

### 5.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.5.5 TEST SETUP

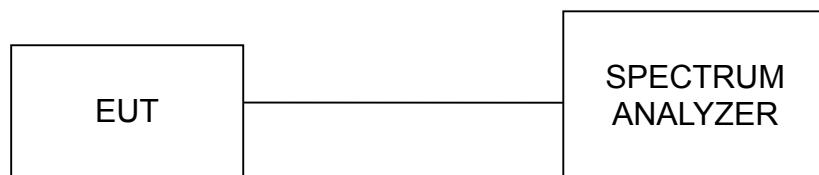

### 5.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6

### 5.5.7 TEST RESULTS


#### 802.11g OFDM MODULATION

<b>EUT</b>	Wireless-G Access Point with SRX	<b>MODEL</b>	WAP54GX
<b>MODULATION TYPE</b>	16QAM	<b>TRANSFER RATE</b>	36Mbps
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	26deg. C, 64%RH, 991hPa
<b>TESTED BY</b>	Match Tsui		


<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>RF POWER LEVEL IN 3 kHz BW (dBm)</b>		<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
		<b>CHAIN 0</b>	<b>CHAIN 1</b>		
1	2412	-14.63	-14.97	8	PASS
6	2437	-10.73	-10.93	8	PASS
11	2462	-12.68	-12.89	8	PASS

## FOR CHAIN 0:


## CH1

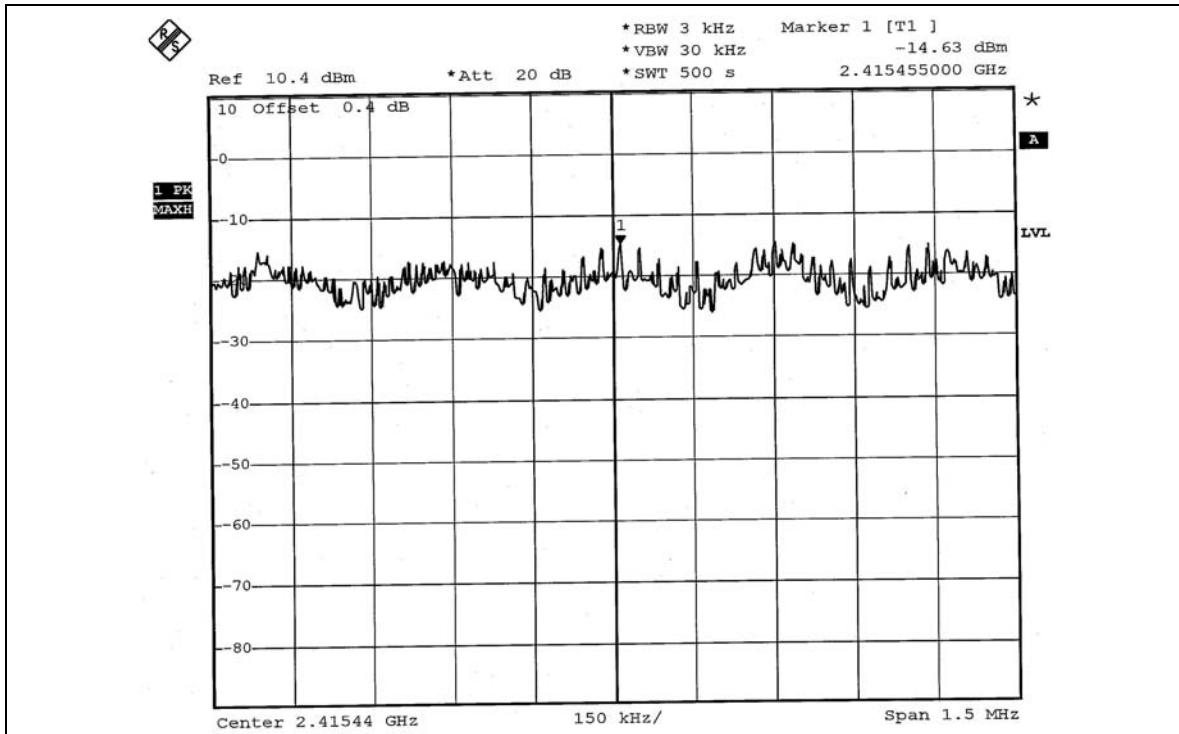

## CH6

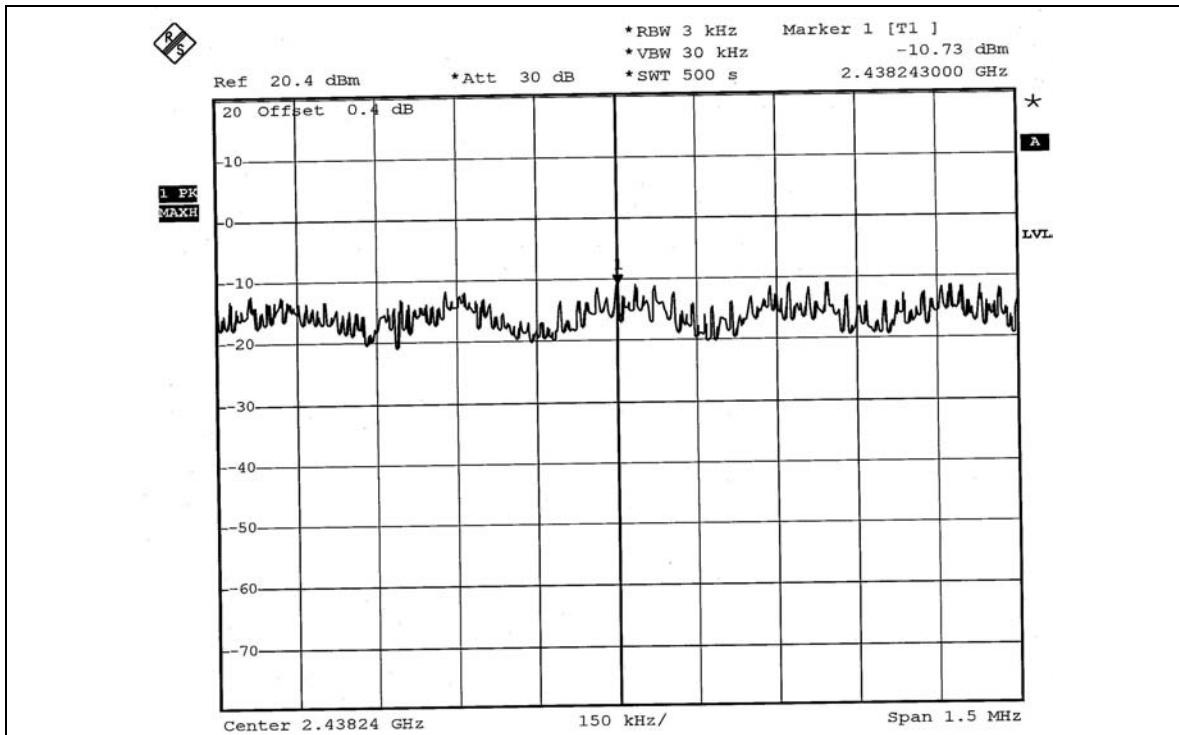


## CH11

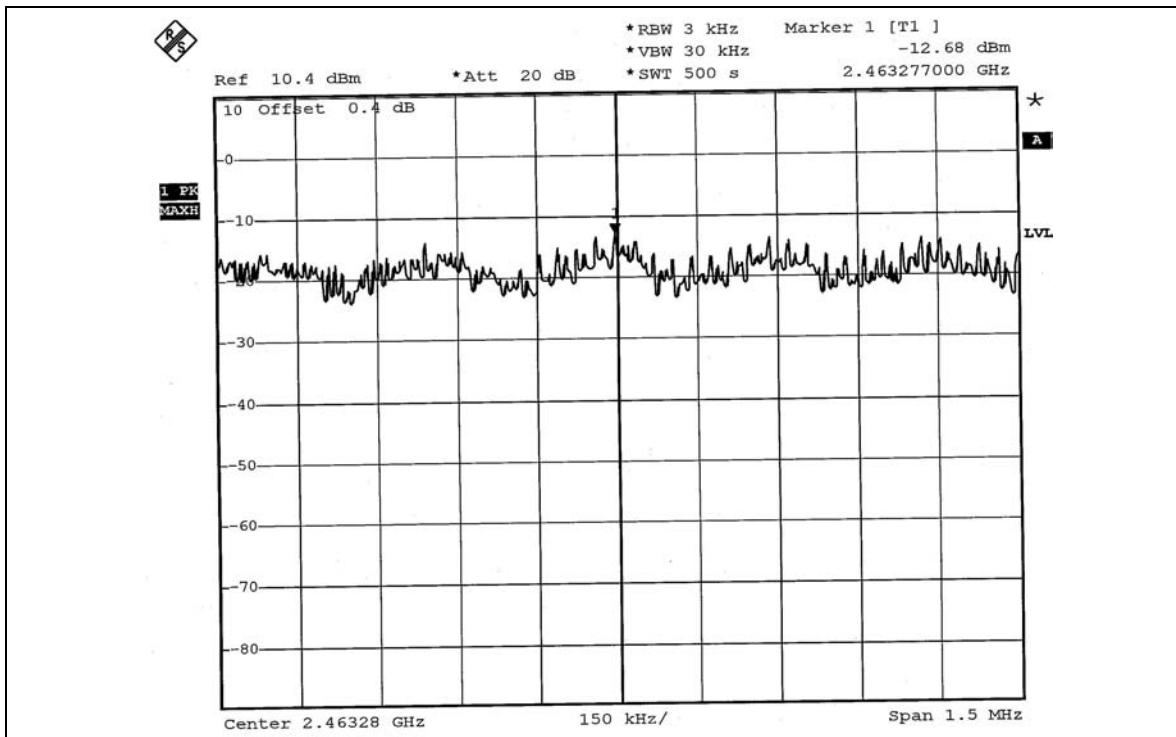


## FOR CHAIN 1:


## CH1

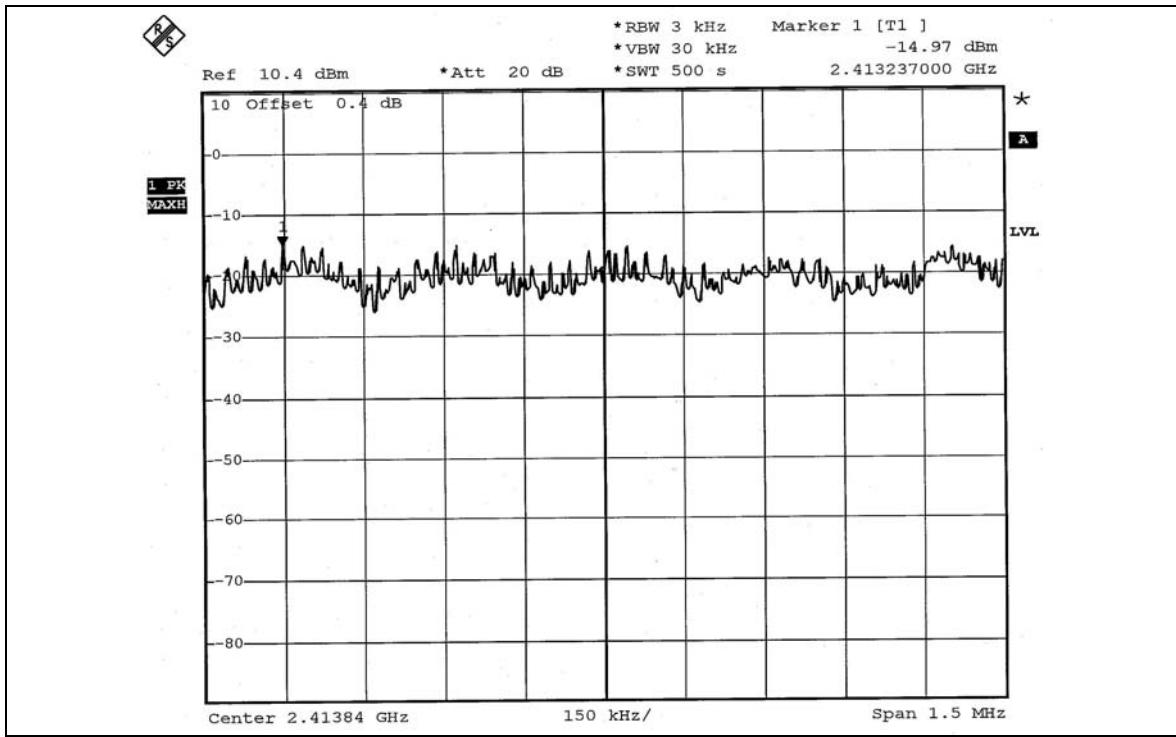

## CH6

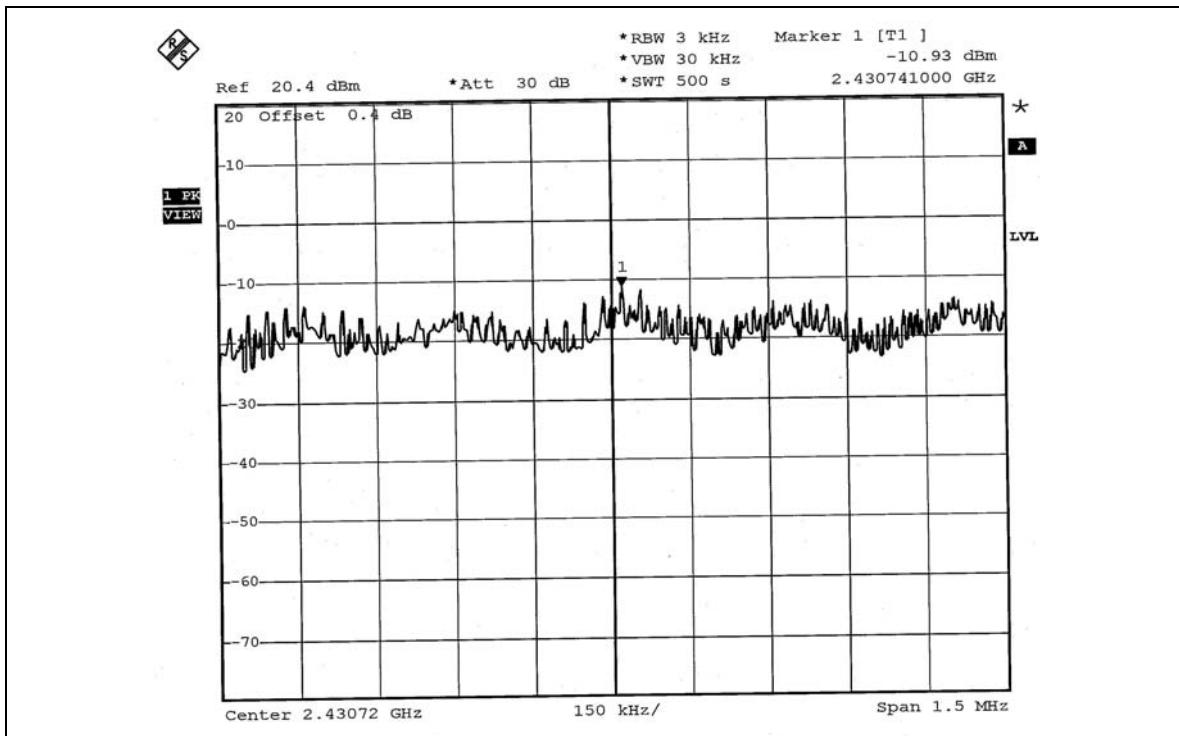

## CH11

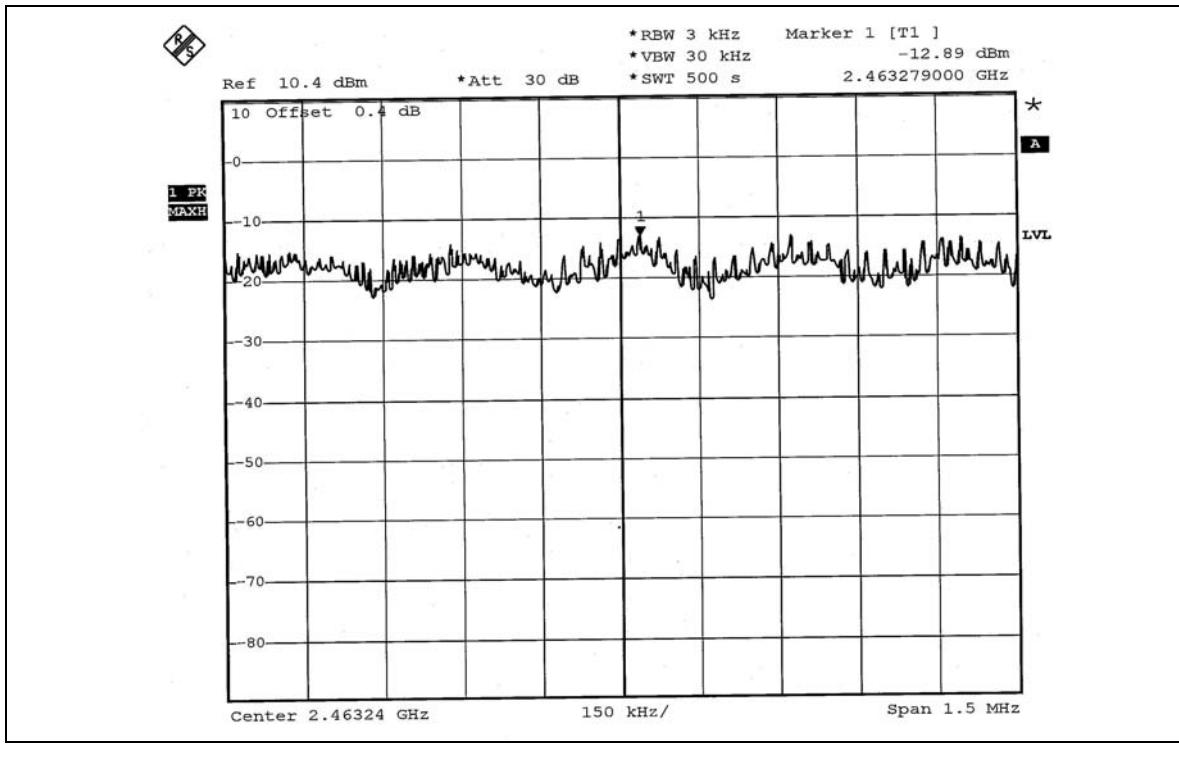

## 5.6 BAND EDGES MEASUREMENT

### 5.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 5.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 5.6.3 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 1 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = VBW = 100kHz; Average RBW = 1MHz, VBW = 1kHz)

**NOTE:** The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.

#### 5.6.4 TEST SETUP

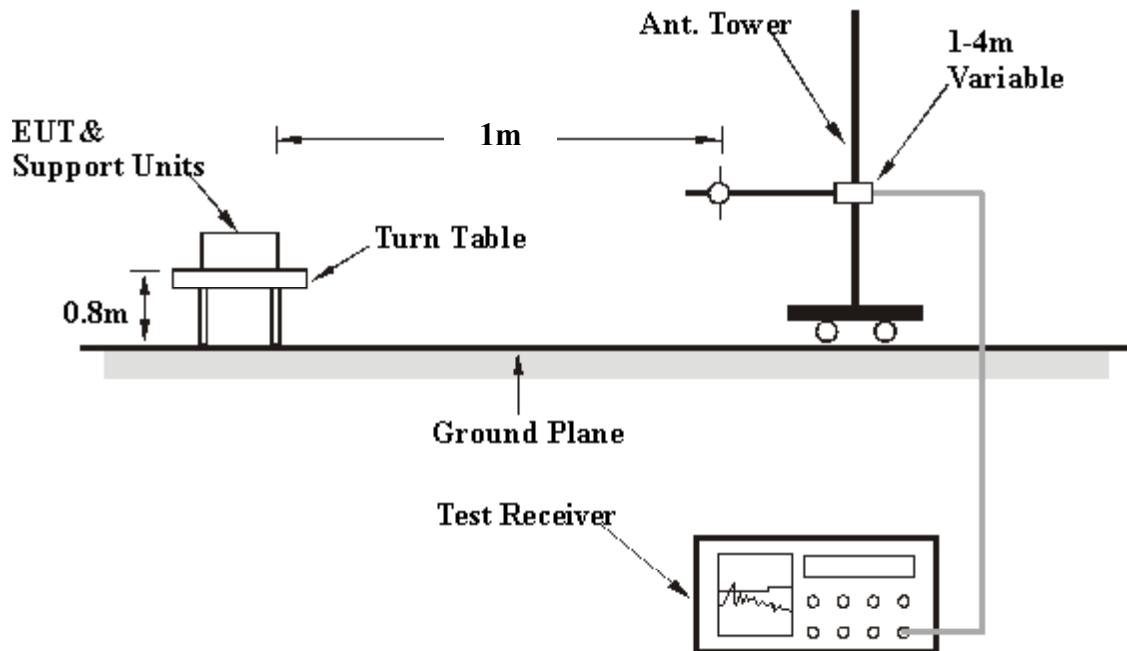

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 5.6.5 DEVIATION FROM TEST STANDARD

No deviation

#### 5.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

### 5.6.7 TEST RESULTS

The spectrum plots are attached on the following 18 images. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).



#### 802.11g OFDM MODULATION



**NOTE 1:** The band edge emission plot on page 100 shows 48.44dBc between carrier maximum power and local maximum emission in restrict band (2.3772GHz). The emission of carrier strength list in the test result of channel 1 at the item 5.2.7 is 113.21dBuV/m (Peak), so the maximum field strength in restrict band is  $113.21 - 48.44 = 64.77$ dBuV/m, which is under 74dBuV/m limit.



The band edge emission plot on page 100 shows 50.75dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 5.2.7 is 101.30dBuV/m (Average), so the maximum field strength in restrict band is  $101.30 - 50.75 = 50.55$ dBuV/m, which is under 54dBuV/m limit.

**NOTE 2:** The band edge emission plot on page 101 shows 56.89dBc between carrier maximum power and local maximum emission in restrict band (2.5000GHz). The emission of carrier strength list in the test result of channel 11 at the item 5.2.7 is 112.72dBuV/m (Peak), so the maximum field strength in restrict band is  $112.72 - 56.89 = 55.83$ dBuV/m, which is under 74dBuV/m limit.

The band edge emission plot on page 102 shows 62.63dBc between carrier maximum power and local maximum emission in restrict band (2.5000GHz). The emission of carrier strength list in the test result of channel 11 at the item 5.2.7 is 101.74dBuV/m (Average), so the maximum field strength in restrict band is  $101.74 - 62.63 = 39.11$ dBuV/m, which is under 54dBuV/m limit.

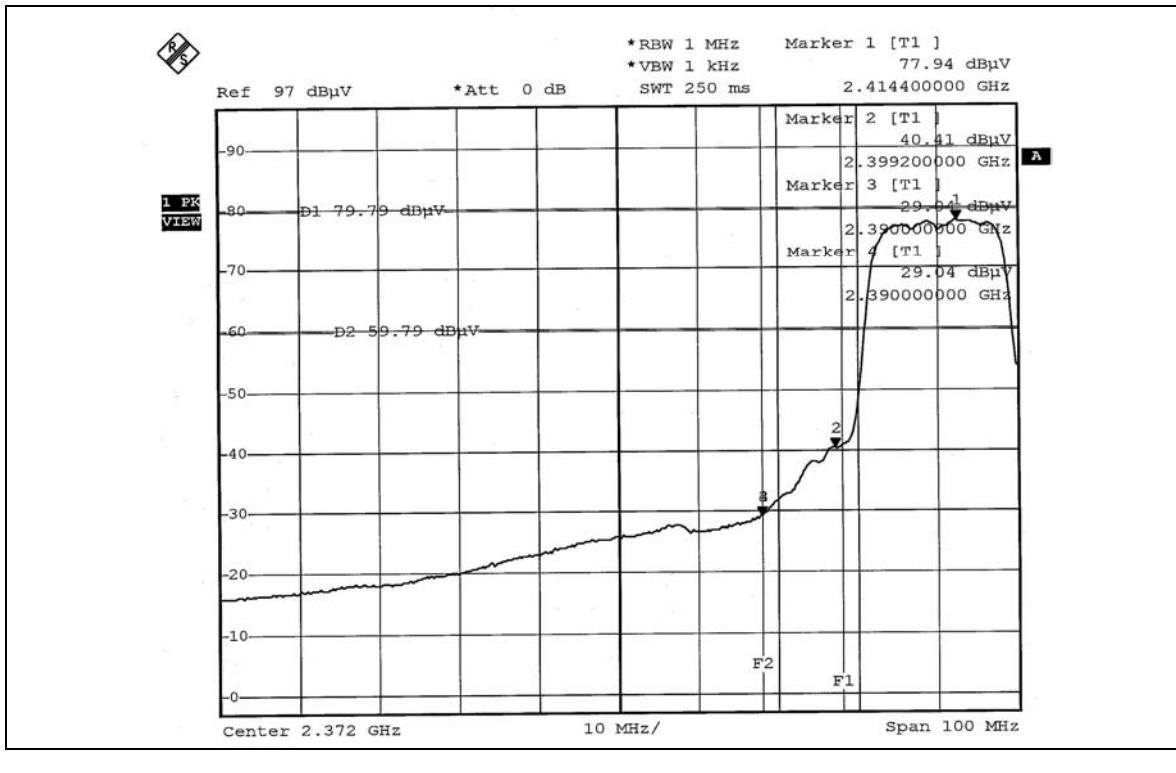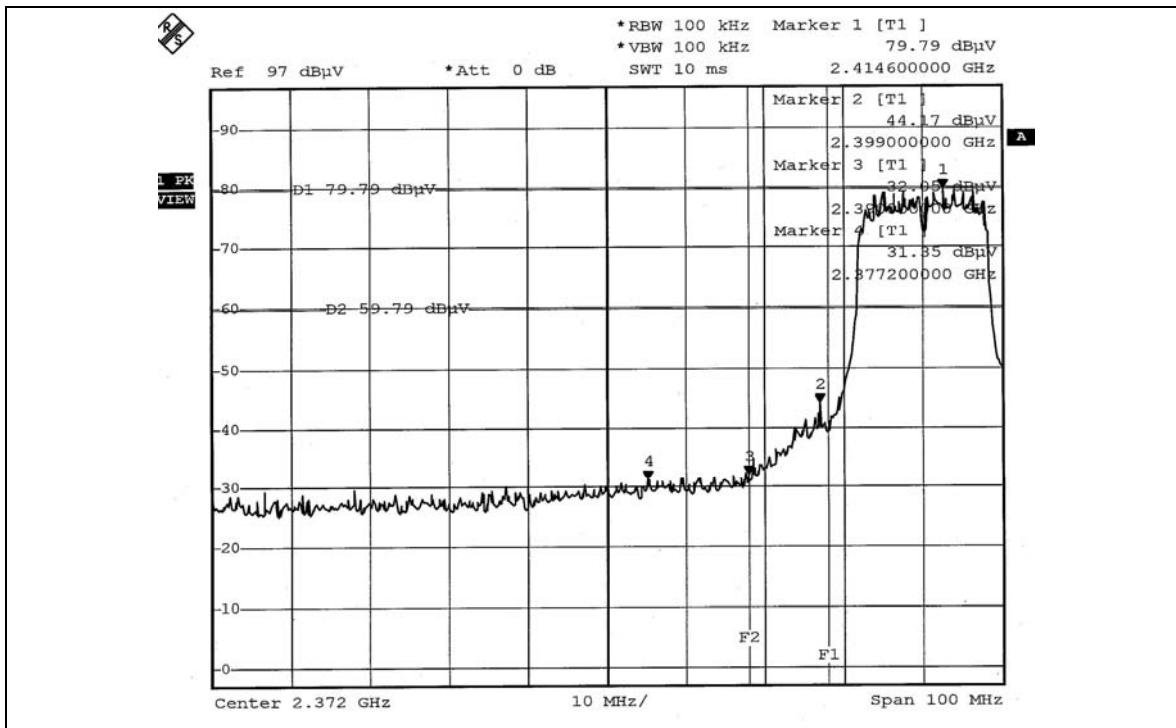

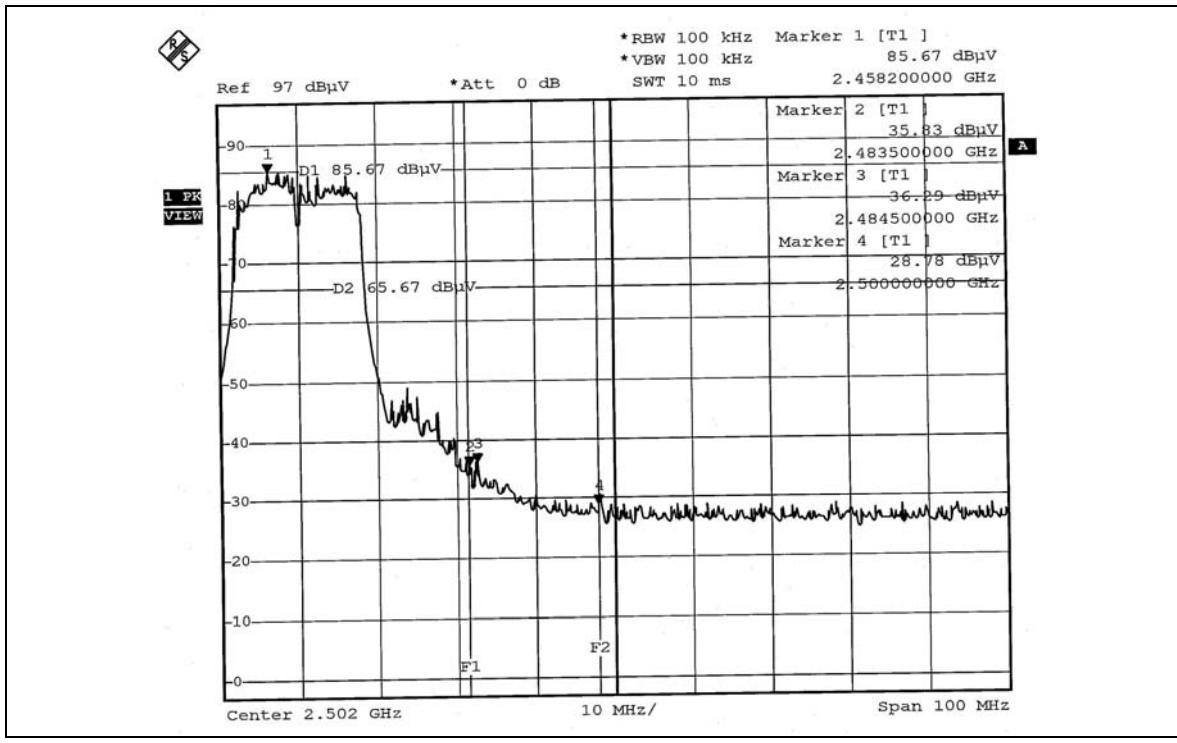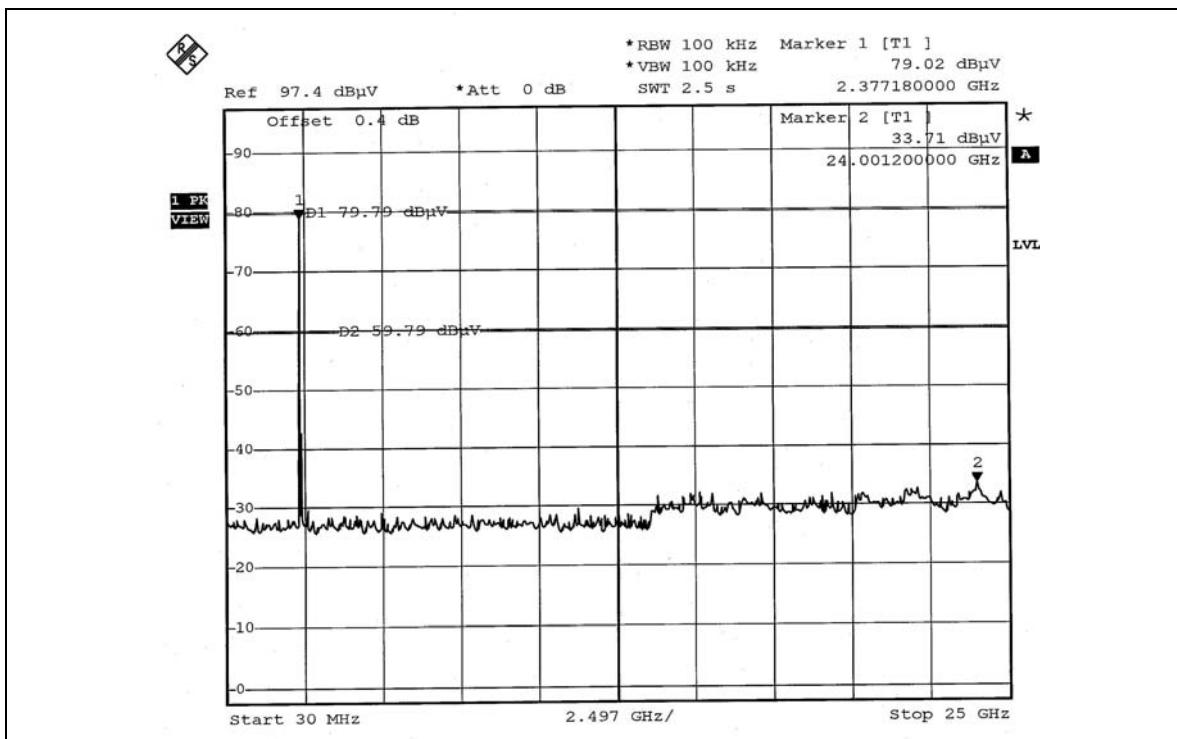

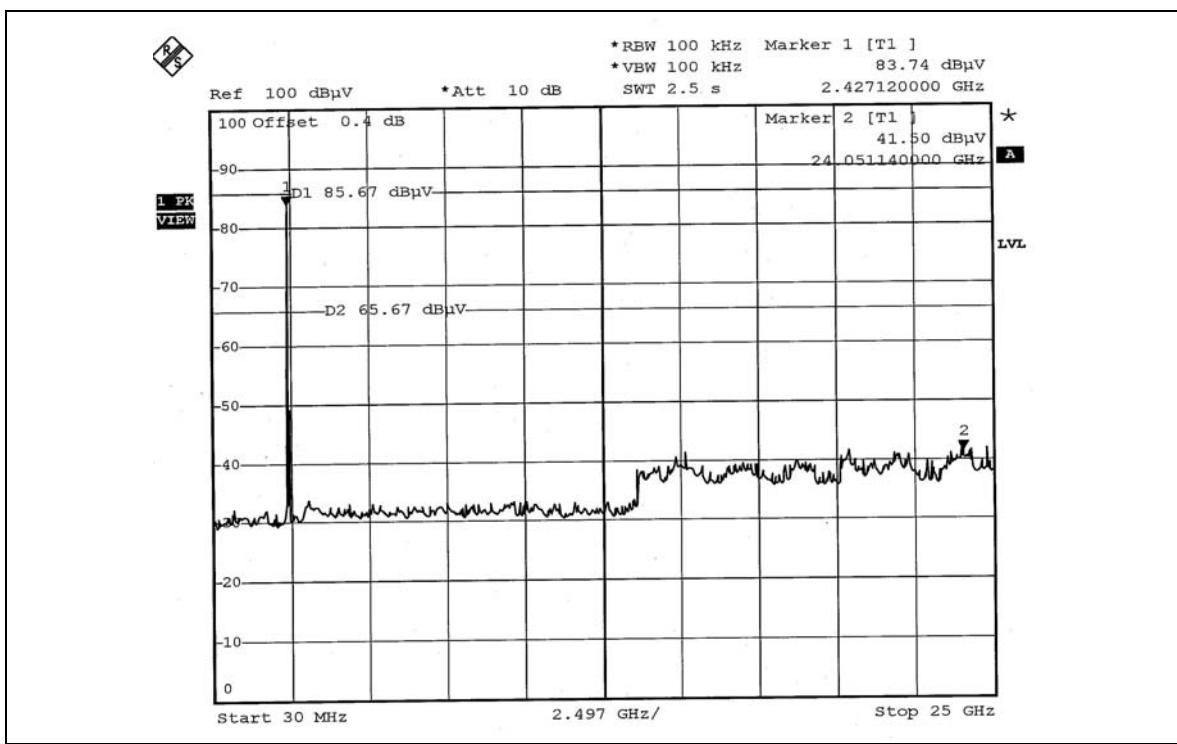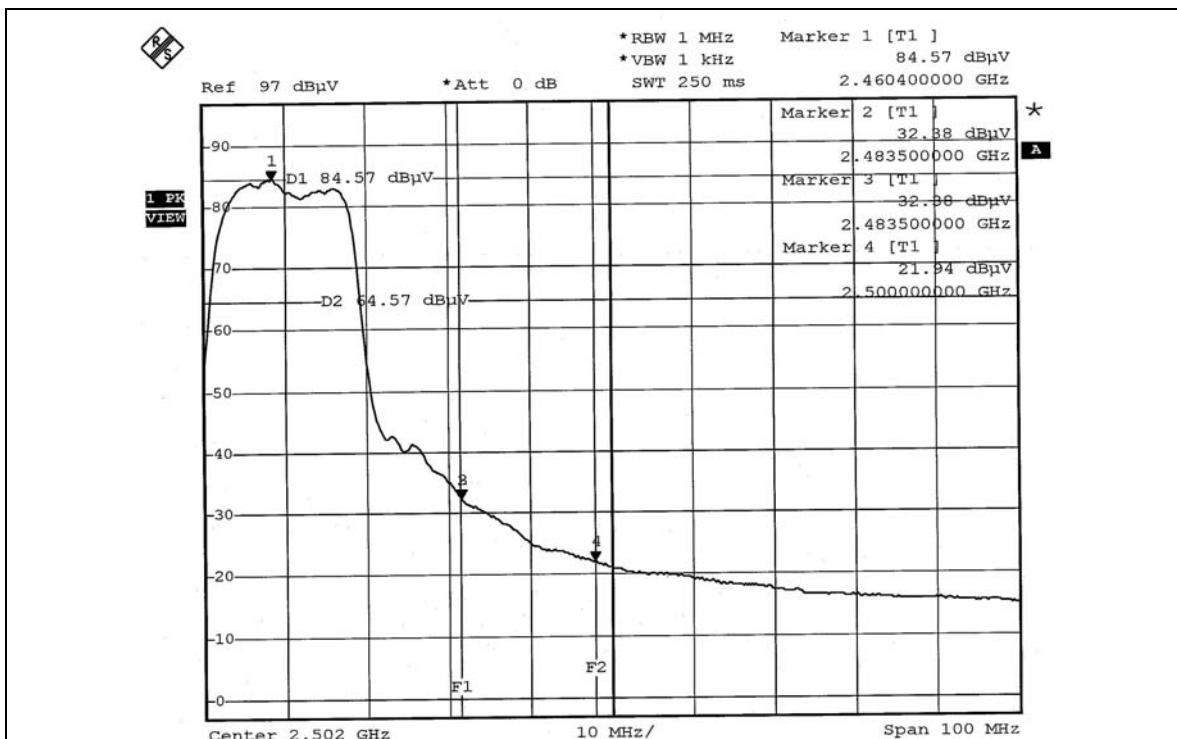

## 5.7 ANTENNA REQUIREMENT

### 5.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 5.7.2 ANTENNA CONNECTED CONSTRUCTION


The antenna type used in this product is Dipole antenna with reverse RPSMA connector. The maximum Gain of this antenna is only 2dBi.

## 6. PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

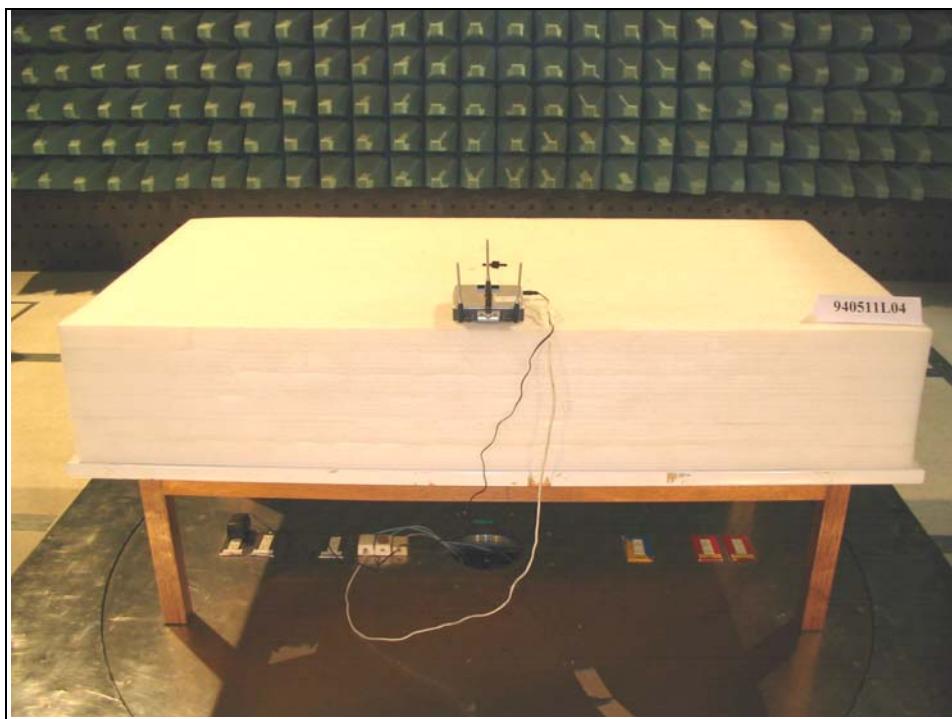

## 7. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>USA</b>	FCC, NVLAP, UL, A2LA
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA , CSA
<b>R.O.C.</b>	CNLA, BSMI, DGT
<b>Netherlands</b>	Telefication
<b>Singapore</b>	PSB , GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180  
Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343  
Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232  
Fax: 886-3-3185050

**Linko RF Lab.**

Tel: 886-3-3270910  
Fax: 886-3-3270892

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.