



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wireless-N Gigabit Security Router with VPN

Model: WRVS4400N

Trade Name: Linksys

Issued to

**Cisco-Linksys LLC
121 Theory Drive Irvine,
CA 92617,USA**

Prepared by

COMPLIANCE CERTIFICATION SERVICES (KUNSHAN) INC.

10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone

Kunshan city JiangSu, (215300) CHINA

TEL: 86-512-57355888

FAX: 86-512-57370818



Lab. Code: 200581-0

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	6
3.5 DESCRIPTION OF TEST MODES	7
4. INSTRUMENT CALIBRATION.....	8
4.1 MEASURING INSTRUMENT CALIBRATION	8
5. FACILITIES AND ACCREDITATIONS	9
5.1 FACILITIES.....	9
5.2 EQUIPMENT.....	9
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	10
6. SETUP OF EQUIPMENT UNDER TEST	11
6.1 SETUP CONFIGURATION OF EUT.....	11
6.2 SUPPORT EQUIPMENT	11
7. FCC PART 15.247 REQUIREMENTS.....	12
7.1 6DB BANDWIDTH.....	12
7.2 PEAK POWER.....	48
7.3 AVERAGE POWER	65
7.4 PEAK POWER SPECTRAL DENSITY	67
7.5 SPURIOUS EMISSIONS.....	84
7.6 RADIATED EMISSIONS	115
7.7 POWERLINE CONDUCTED EMISSIONS.....	154
APPENDIX 1 RADIO FREQUENCY EXPOSURE	157
APPENDIX 2 PHOTOGRAPHS OF TEST SETUP	160



1. TEST RESULT CERTIFICATION

Applicant: Cisco-Linksys LLC
121 Theory Drive
Irvine, CA 92617, USA

Equipment Under Test: Wireless-N Gigabit Security Router with VPN

Trade Name: Linksys

Model: WRVS4400N

Date of Test: July 12 ~ 22, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:



Tony Houn
General Manager of Kunshan Laboratory
Compliance Certification Services Inc.



Miro Chueh
Section Manager of Kunshan Laboratory
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Wireless-N Gigabit Security Router with VPN
Trade Name	Linksys
Model Number	WRVS4400N
Model Discrepancy	All the above models are identical except the model designation for different market.
Power Supply	AC to DC charger Trade Name :Linksys Model Number : MU12-2120100-A01 Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 12V,1.0 A DC Power Cord: DC Power Cable 2m Non-shielding, Non-detachable, with Core
Frequency Range	2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b mode: 20.29 dBm IEEE 802.11g 20M mode: 15.95 dBm IEEE 802.11g 40M mode: 15.73 dBm draft 802.11n Standard-20 MHz Channel mode: 16.29 dBm draft 802.11n Wide-40 MHz Channel mode: 15.50 dBm
Modulation Technique	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g 20Mmode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) IEEE 802.11g 40Mmode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33, 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps)
Number of Channels	IEEE 802.11b/g 20M mode: 11 Channels IEEE 802.11g 40M mode: 7 Channels draft 802.11n Standard-20 MHz Channel mode: 11 Channels draft 802.11n Wide-40 MHz Channel mode: 7 Channels
Antenna Specification	Dipole Antenna / Gain 3.6dBi (including cable loss)

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **Q87-WRVS4400N** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The 2x3 configuration was used for all testing in this report.

The worst-case data rates are determined to be as follows for each mode based on investigation by measuring the average power, peak power and PPSD across all data rates, bandwidths, and modulations.

The worst-case data rates:

IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g 20M mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE802.11g 40M mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 6Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz Channel mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

draft 802.11n Wide-40 MHz Channel mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.

All emissions tests were made with the worst-case data rates.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2006
Peak and Avg Power Sensor	Agilent	E9327A	US40441788	07/29/2007
EPM-P Series Power Meter	Agilent	E4416A	QB41292714	07/29/2007

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2006
Pre-Amplifier	Miteq	NSP4000-NF	870731	01/21/2007
Horn Antenna	Austriah	BBHA9120D	D267	09/20/2006
Turn Table	CT	CT123	4162	N.C.R
Antenna Tower	CT	CTERG23	3253	N.C.R
Controller	CT	CT100	95635	N.C.R
Coax Switch	Anitsu	MP 598	M 80094	N/A
Site NSA	CCS Lab.	N/A	N/A	12/11/2006
ESPI3 EMI RECEIVER	R&S	ESPI3	101026	01/21/2007
Pre-Amplifier	MINI	ZFL-1000VH2	d041703	01/21/2007
Bilog Antenna	Sunol Sciences	JB1	A110204-2	11/13/2006

Remark: The measurement uncertainty is less than $\pm 2.50\text{dB}$ (30MHz ~ 1GHz), $\pm 3.169\text{dB}$ (Above 1GHz)

Power Line Conducted Emission Test Site A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESI26	100068	01/21/2007
EMC Analyzer	Agilent	E7402A	US41160329	01/21/2007
LISN	FCC	FCC-LISN-50-50-2-M	01067	07/29/2007
LISN (EUT)	FCC	FCC-LISN-50-50-2-M	01068	07/29/2007
TRANSIENT LIMITER	SCHAFFNER	CFL9206	1710	07/29/2007
EMI Monitor control box	FCC	0-SVDC	N/A	N/A

which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Remark: The measurement uncertainty is less than $\pm 2.15\text{dB}$, which is evaluated as per the LAB34 and CISPR/A/291/CDV.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#, Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300)CHINA.

The measurement facilities are constructed in conformance with the requirements of CISPR 16-1, ANSI C63.4 and other equivalent standards.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	NVLAP	EN 55022, EN 61000-3-2, EN 61000-3-3, EN550024, EN 61000-4-2, EN 61000-4-3, EN61000-4-4, EN 61000-4-5, EN 61000-4-6, IEC 61000-4-8, EN 61000-4-11 ANSI C63.4, CISPR16-1, IEC61000-3-2, IEC61000-3-3, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11	 Lab. Code: 200581-0
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-1600 C-1707
Norway	NEMKO	EN61000-6-1/2/3/4, EN 50082-1/2, IEC 61000-6-1/2/3/4, EN 50091-2, EN 55011, EN 55022, EN 55024, EN 61000-3-2/3, EN 61000-11, IEC 61000-4-2/3/4/5/6/8/11, CISPR16-1/2/3/4	 ELA 105

** No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.*



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Equipment	Model	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	Notebook	M285	1824064-1B	DoC	LEO	Line cable: Un-Shielded 1.8m LAN cable: Un-Shielded 1.8m	Shielded, 1.8m

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*




7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = 3RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

**TEST RESULTS***No non-compliance noted***Test Data****TRANSMIT CHAIN 0****IEEE 802.11b mode**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.92	>500	PASS
Mid	2437	9.91		PASS
High	2462	10.08		PASS

IEEE 802.11g 20M mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.66	>500	PASS
Mid	2437	16.66		PASS
High	2462	16.66		PASS

IEEE 802.11g 40M mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.50	>500	PASS
Mid	2437	36.50		PASS
High	2452	36.50		PASS

draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.66	>500	PASS
Mid	2437	16.66		PASS
High	2462	16.66		PASS

draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.50	>500	PASS
Mid	2437	36.50		PASS
High	2452	36.50		PASS

**TRANSMIT CHAIN 1****IEEE 802.11b mode**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.08	>500	PASS
Mid	2437	9.92		PASS
High	2462	9.92		PASS

IEEE 802.11g 20M mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.50	>500	PASS
Mid	2437	15.58		PASS
High	2462	16.66		PASS

IEEE 802.11g 40M mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.50	>500	PASS
Mid	2437	36.50		PASS
High	2452	36.50		PASS

draft 802.11n Standard-20 MHz Channel mode


Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.66	>500	PASS
Mid	2437	16.66		PASS
High	2462	16.66		PASS

draft 802.11n Wide-40 MHz Channel mode


Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.50	>500	PASS
Mid	2437	36.50		PASS
High	2452	36.50		PASS

**Test Plot****IEEE 802.11b MODE CHAIN 0****6dB Bandwidth (CH Low)**

* Agilent 13:20:36 Aug 2, 2006

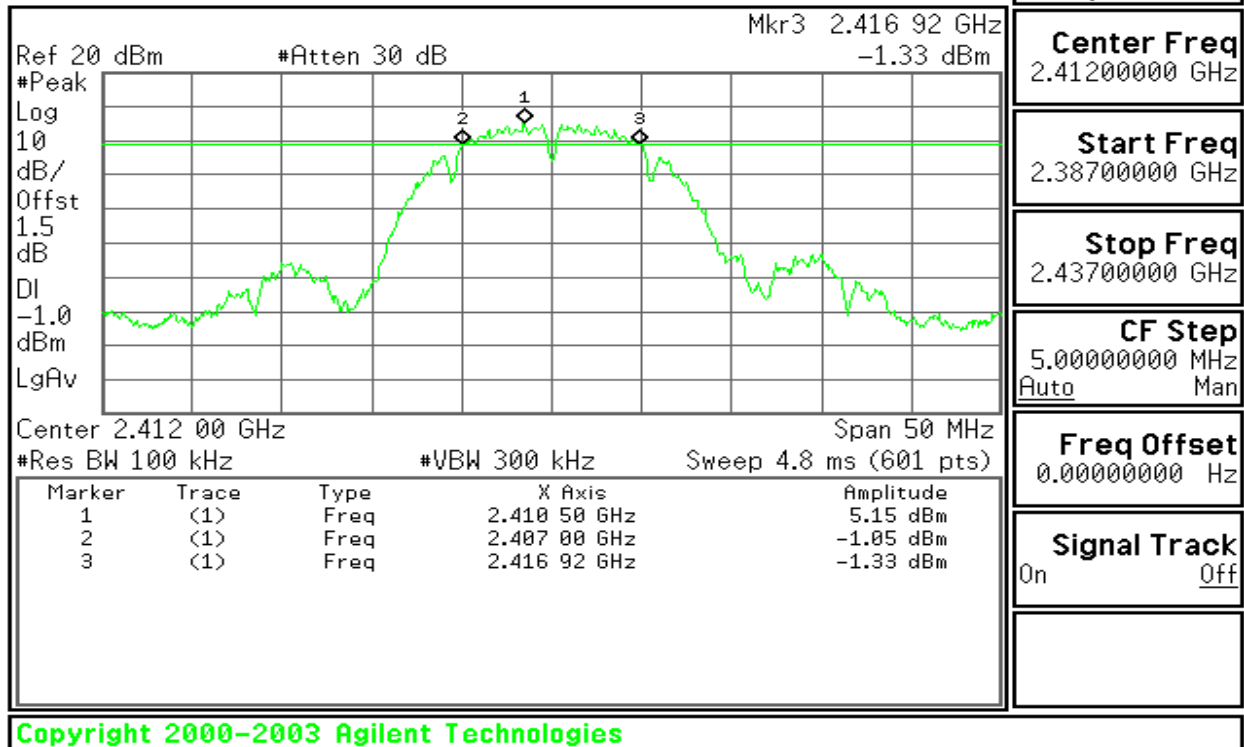
**6dB Bandwidth (CH Mid)**

* Agilent 13:07:06 Aug 2, 2006

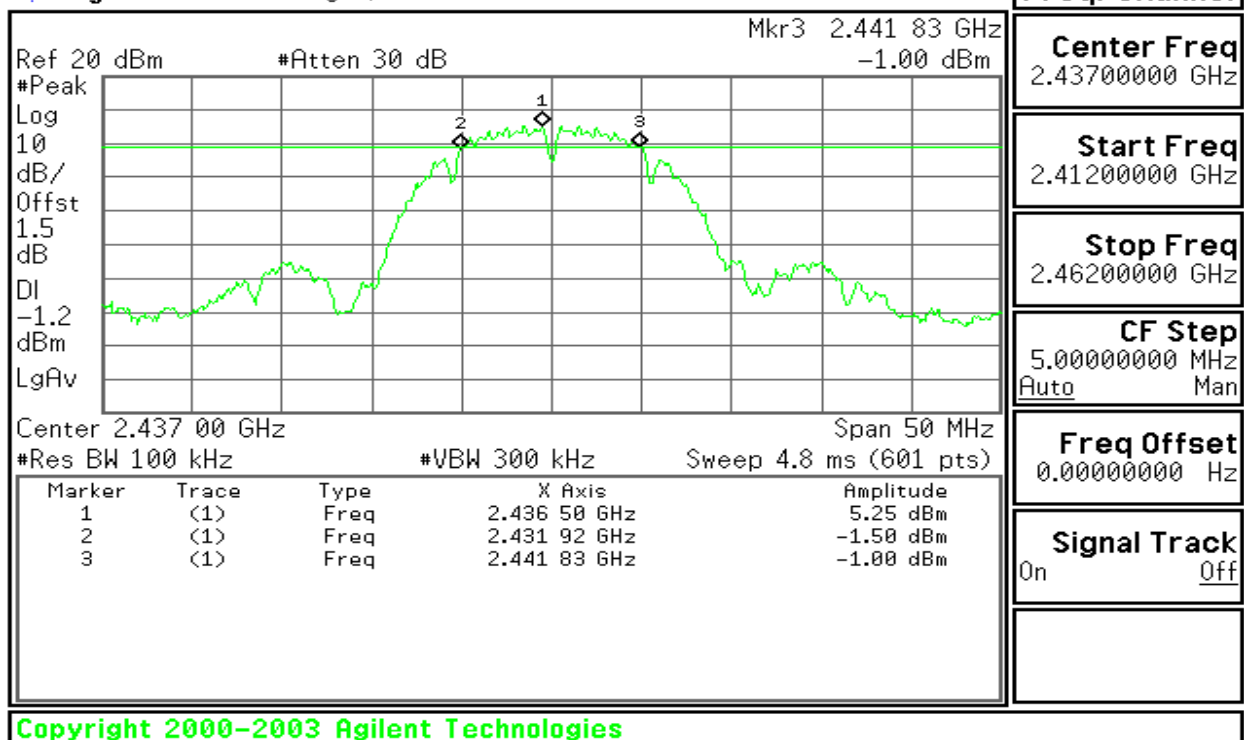

**6dB Bandwidth (CH High)**


* Agilent 13:15:30 Aug 2, 2006

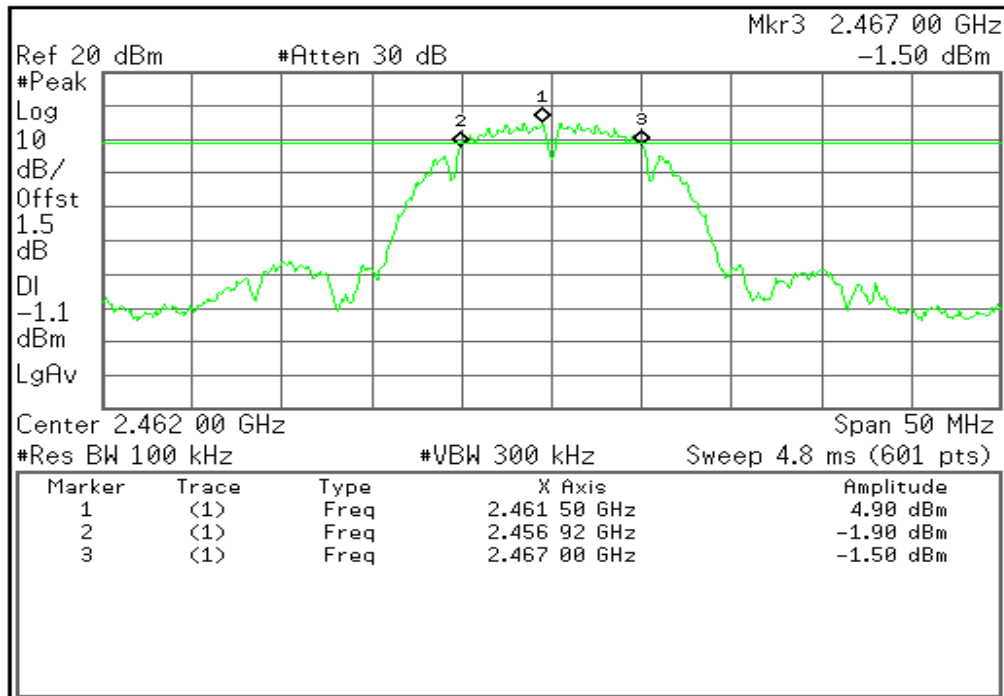**Freq/Channel****Center Freq**
2.46200000 GHz**Start Freq**
2.43700000 GHz**Stop Freq**
2.48700000 GHz**CF Step**
5.00000000 MHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off

Copyright 2000-2003 Agilent Technologies

IEEE 802.11b MODE CHAIN 1**6dB Bandwidth (CH Low)**

* Agilent 13:25:35 Aug 2, 2006

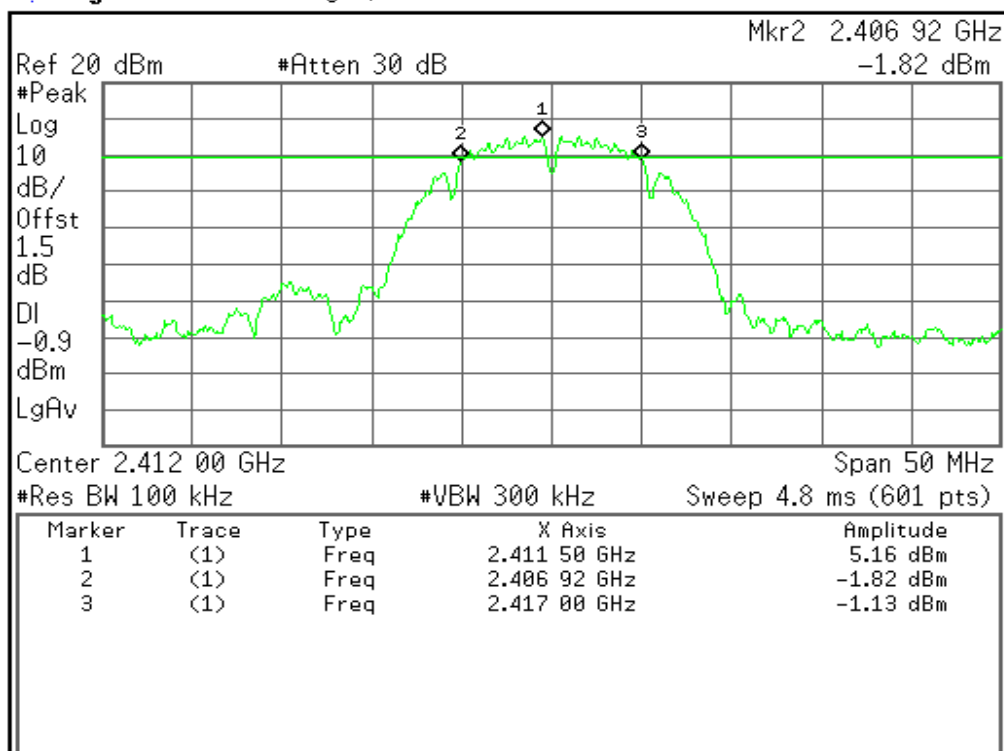
**Freq/Channel****Center Freq**
2.41200000 GHz**Start Freq**
2.38700000 GHz**Stop Freq**
2.43700000 GHz**CF Step**
5.00000000 MHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off

Copyright 2000-2003 Agilent Technologies



6dB Bandwidth (CH Mid)

* Agilent 13:27:04 Aug 2, 2006

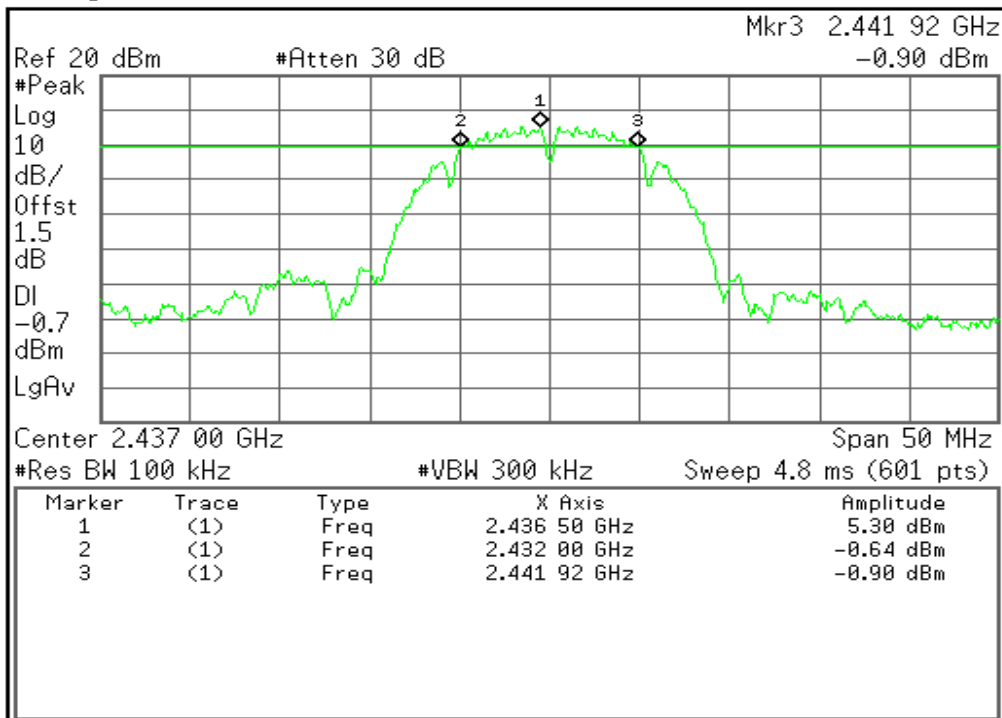

Freq/Channel

Center Freq

2.43700000 GHz

Start Freq

2.41200000 GHz

Stop Freq

2.46200000 GHz

CF Step

5.00000000 MHz

Auto Man

Freq Offset

0.00000000 Hz


Signal Track

On Off

Copyright 2000-2003 Agilent Technologies

6dB Bandwidth (CH High)

* Agilent 13:29:03 Aug 2, 2006

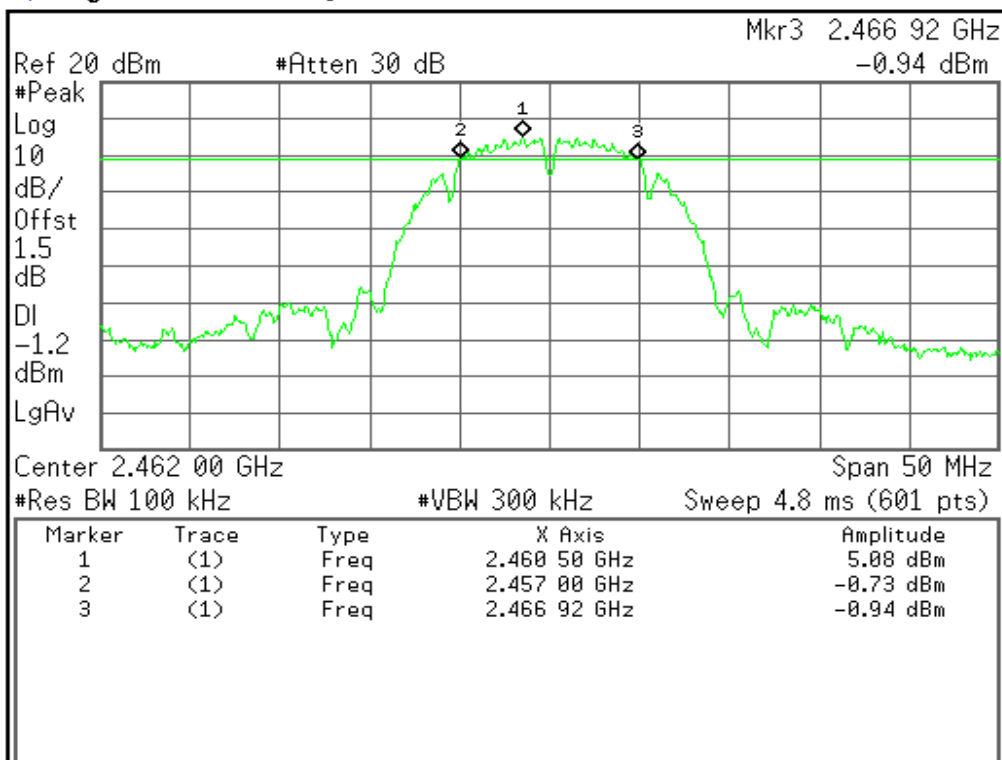

Freq/Channel

Center Freq

2.46200000 GHz

Start Freq

2.43700000 GHz

Stop Freq

2.48700000 GHz

CF Step

5.00000000 MHz

Auto Man

Freq Offset

0.00000000 Hz


Signal Track

On Off

Copyright 2000-2003 Agilent Technologies

**IEEE 802.11g 20M MODE CHAIN 0****6dB Bandwidth (CH Low)**


Agilent 13:49:16 Aug 2, 2006

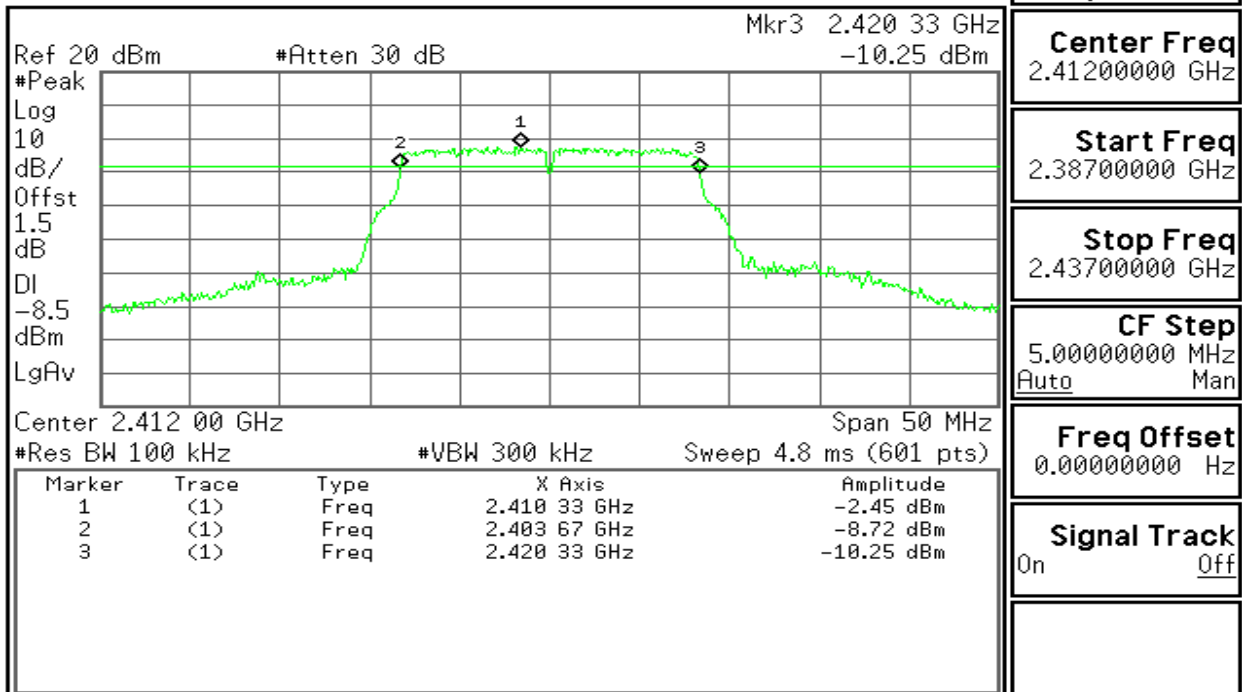

Copyright 2000-2003 Agilent Technologies

6dB Bandwidth (CH Mid)


Agilent 13:48:07 Aug 2, 2006

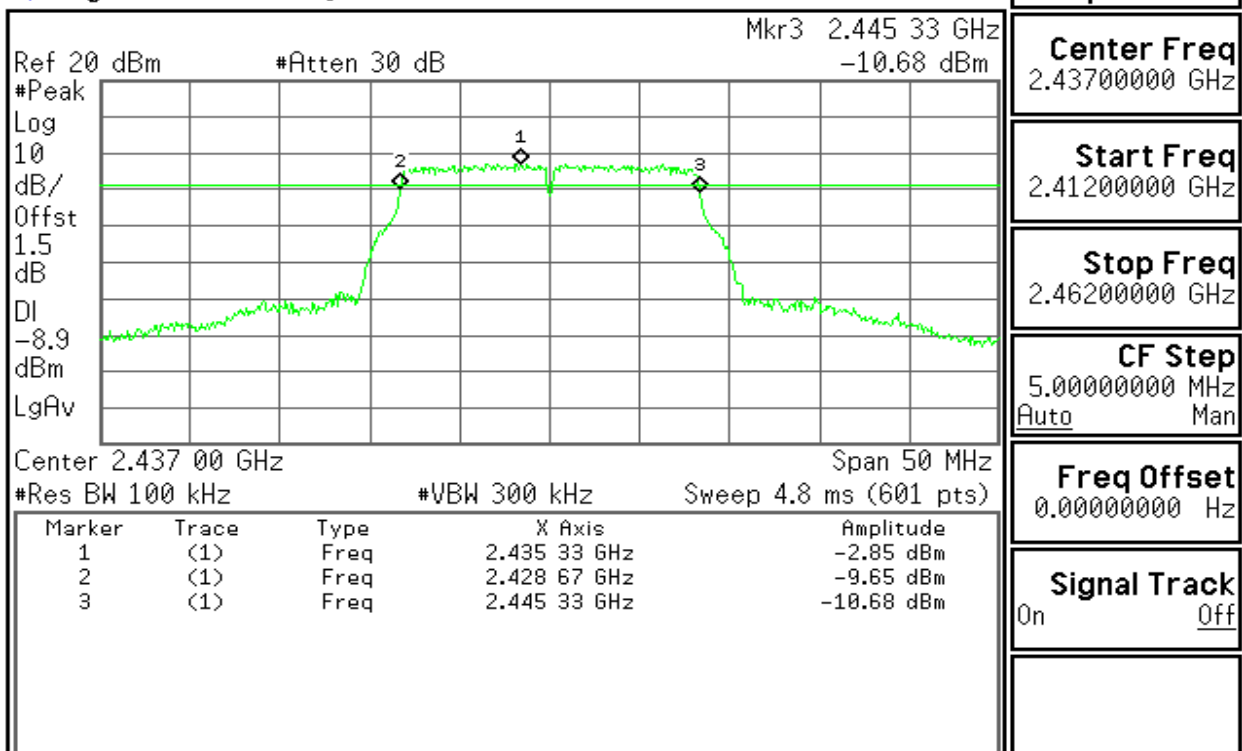

Copyright 2000-2003 Agilent Technologies

**6dB Bandwidth (CH High)**


* Agilent 13:46:34 Aug 2, 2006

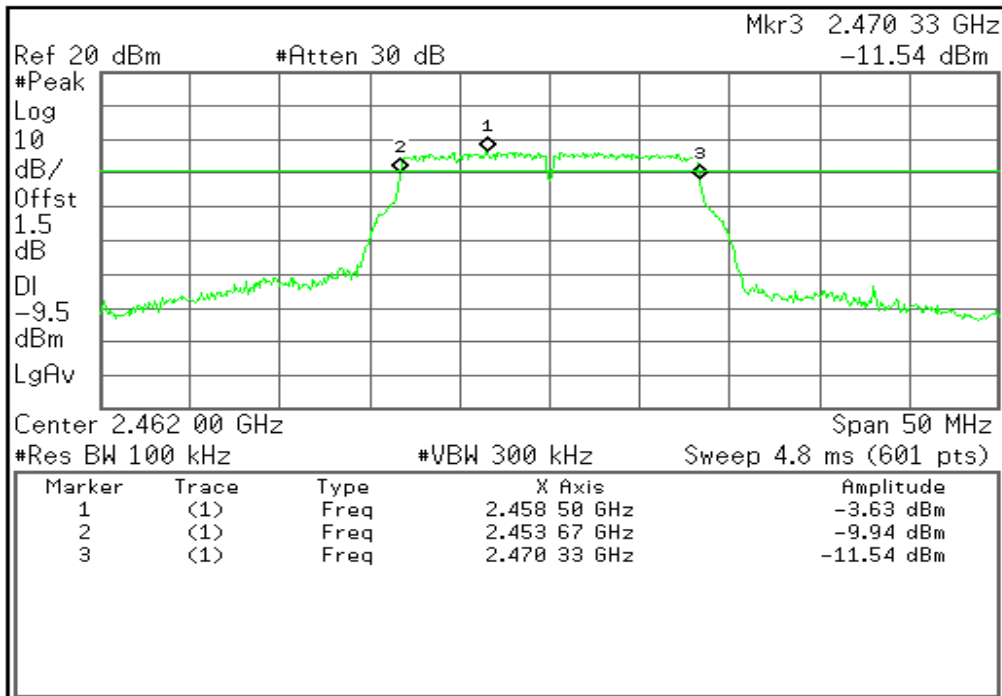**Freq/Channel****Center Freq**
2.46200000 GHz**Start Freq**
2.43700000 GHz**Stop Freq**
2.48700000 GHz**CF Step**
5.00000000 MHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off

Copyright 2000-2003 Agilent Technologies

IEEE 802.11g 20M MODE CHAIN 1**6dB Bandwidth (CH Low)**

* Agilent 13:38:10 Aug 2, 2006

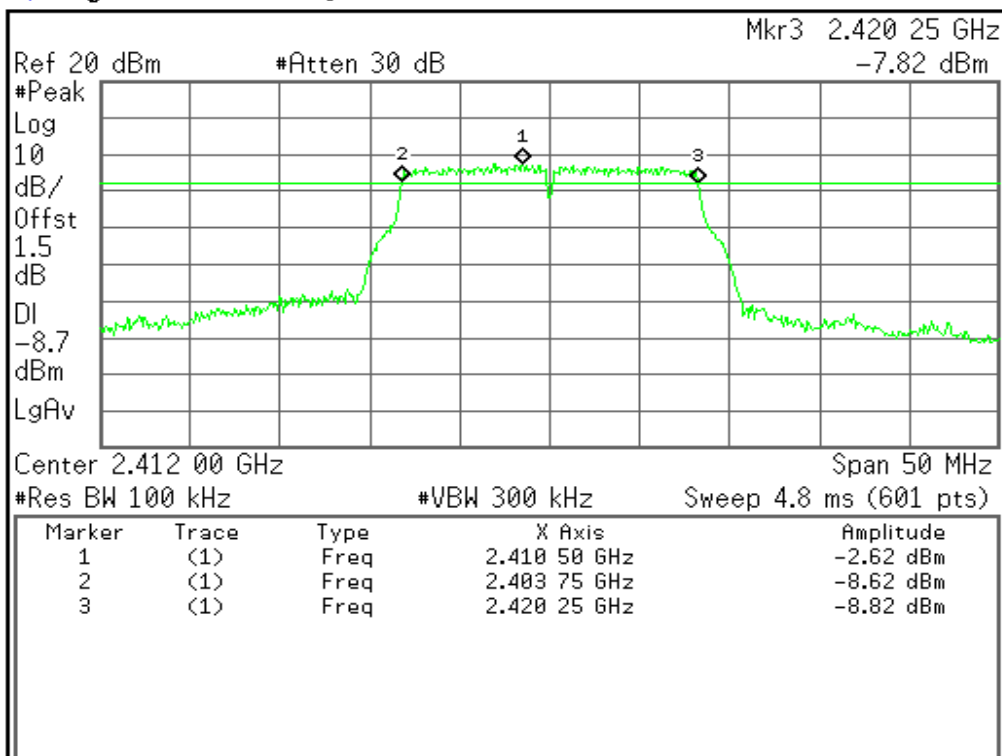
**Freq/Channel****Center Freq**
2.41200000 GHz**Start Freq**
2.38700000 GHz**Stop Freq**
2.43700000 GHz**CF Step**
5.00000000 MHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off

Copyright 2000-2003 Agilent Technologies




6dB Bandwidth (CH Mid)

* Agilent 13:39:29 Aug 2, 2006

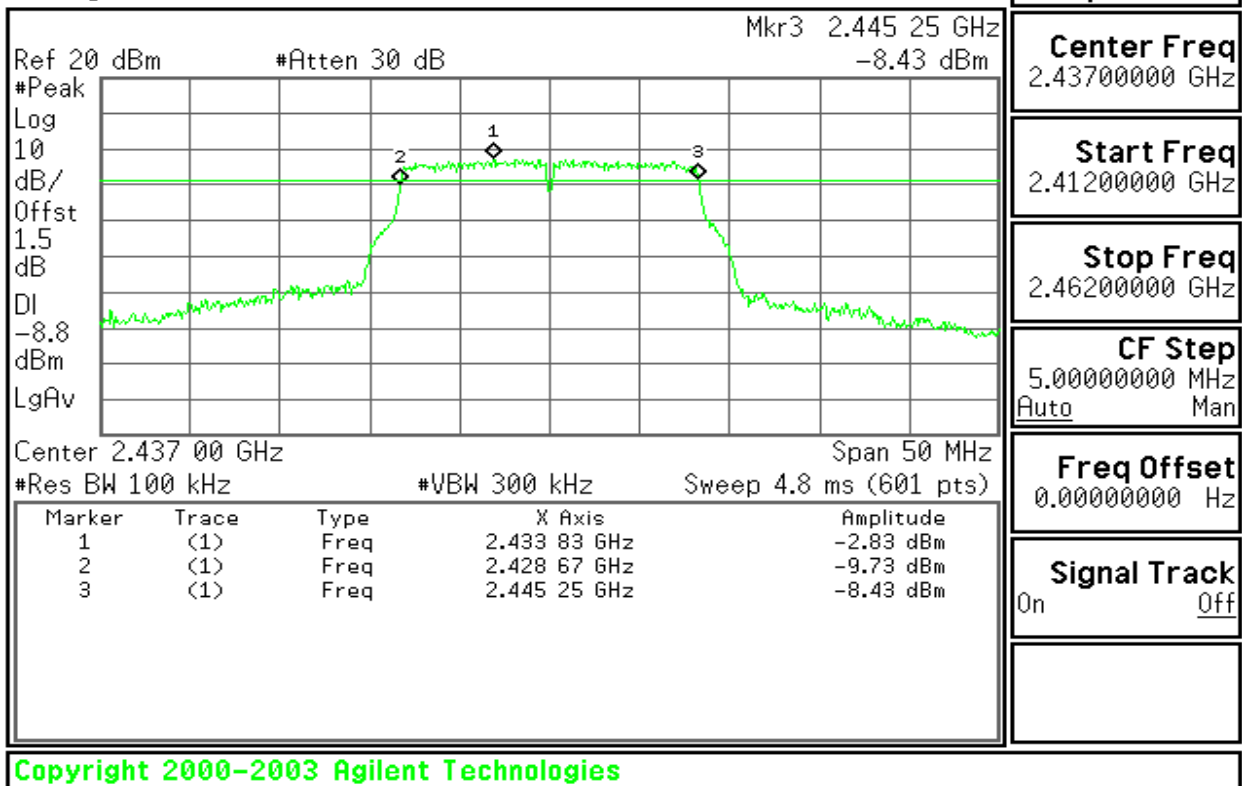


6dB Bandwidth (CH High)

* Agilent 13:42:08 Aug 2, 2006

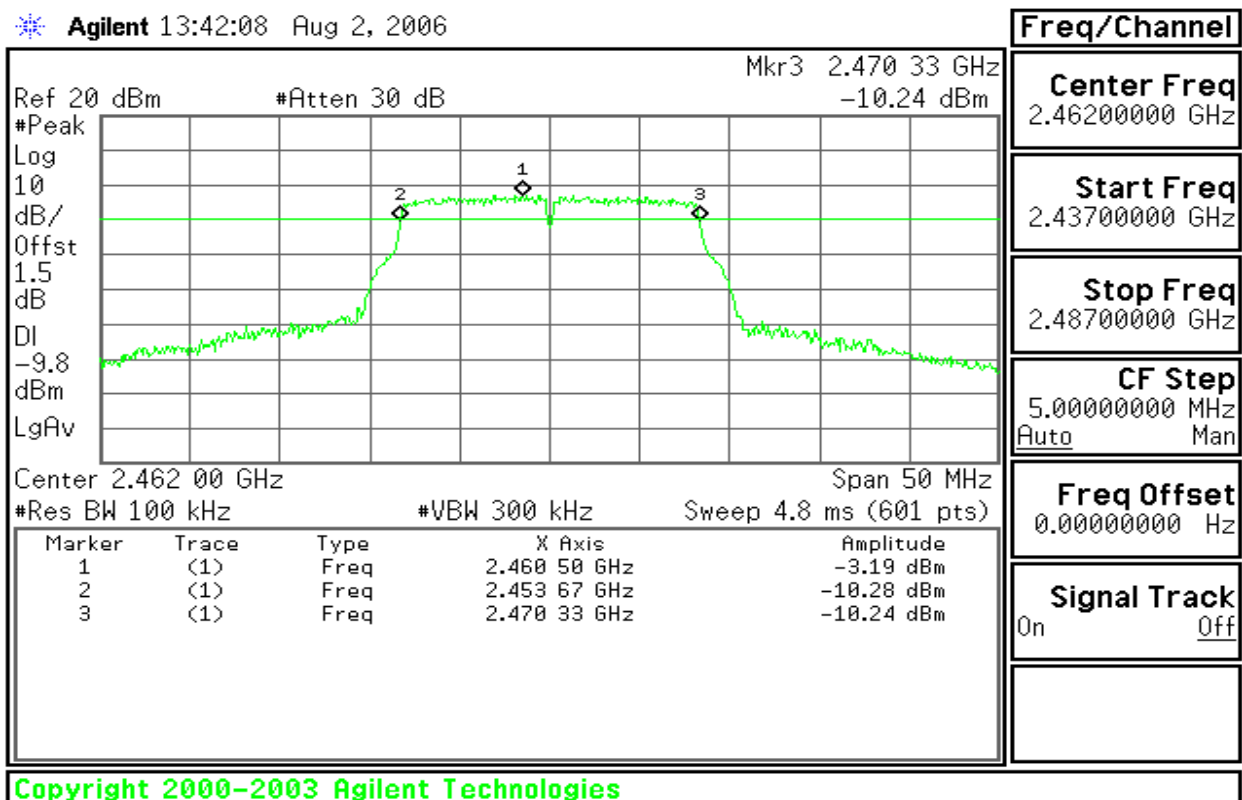

**IEEE 802.11g 40M MODE CHAIN 0****6dB Bandwidth (CH Low)**


* Agilent 14:49:40 Aug 3, 2006

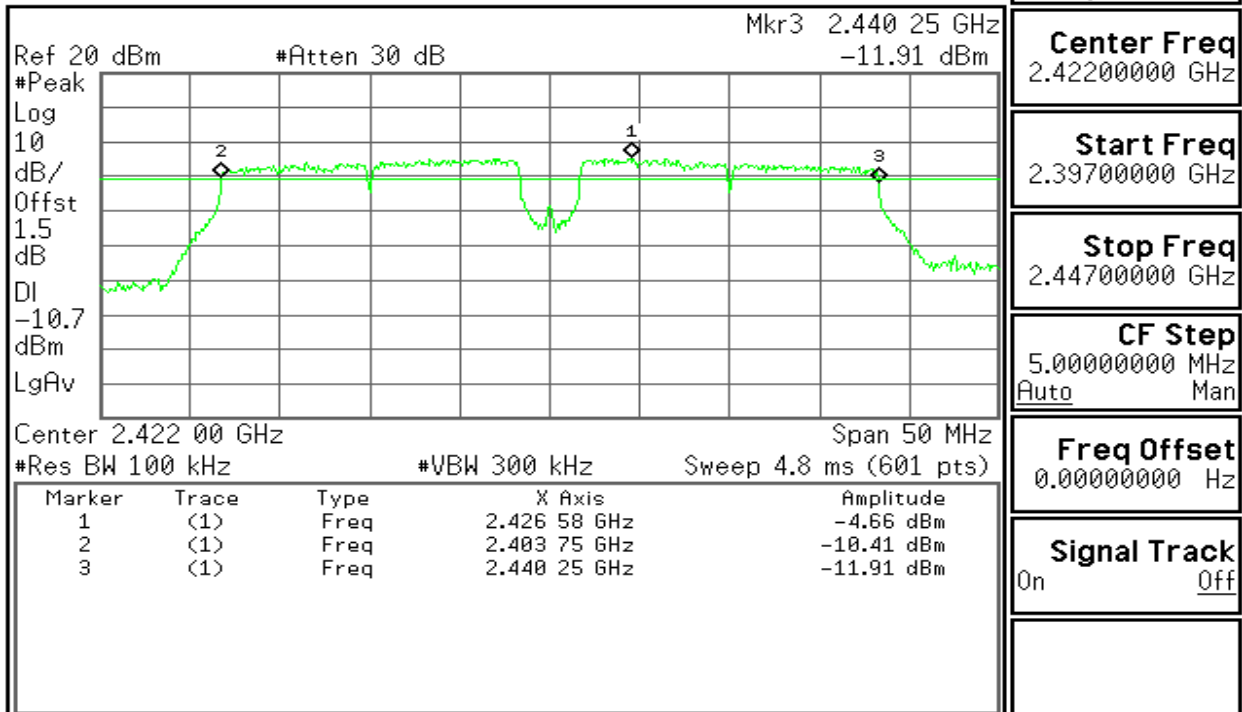

Copyright 2000-2004 Agilent Technologies

6dB Bandwidth (CH Mid)


* Agilent 14:51:27 Aug 3, 2006

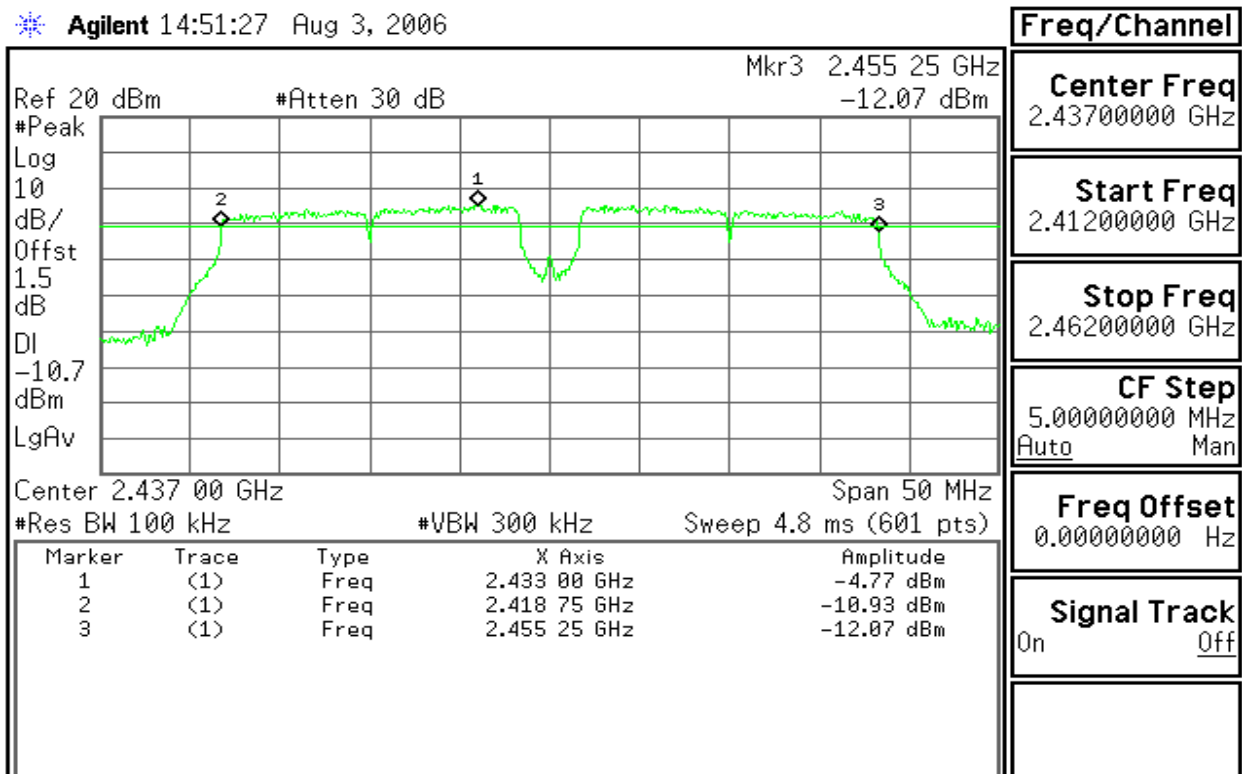

Copyright 2000-2004 Agilent Technologies

**6dB Bandwidth (CH High)**


* Agilent 14:52:50 Aug 3, 2006

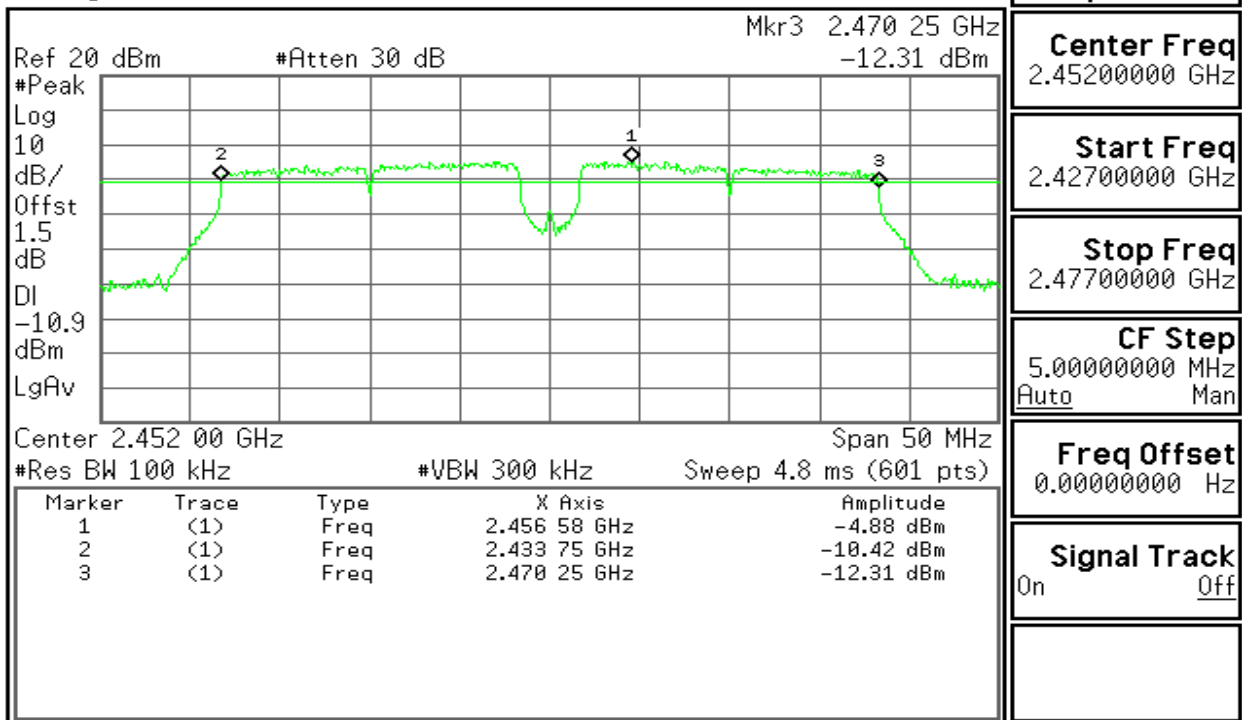

Copyright 2000-2004 Agilent Technologies

IEEE 802.11g 40M MODE CHAIN 1**6dB Bandwidth (CH Low)**

* Agilent 15:00:01 Aug 3, 2006

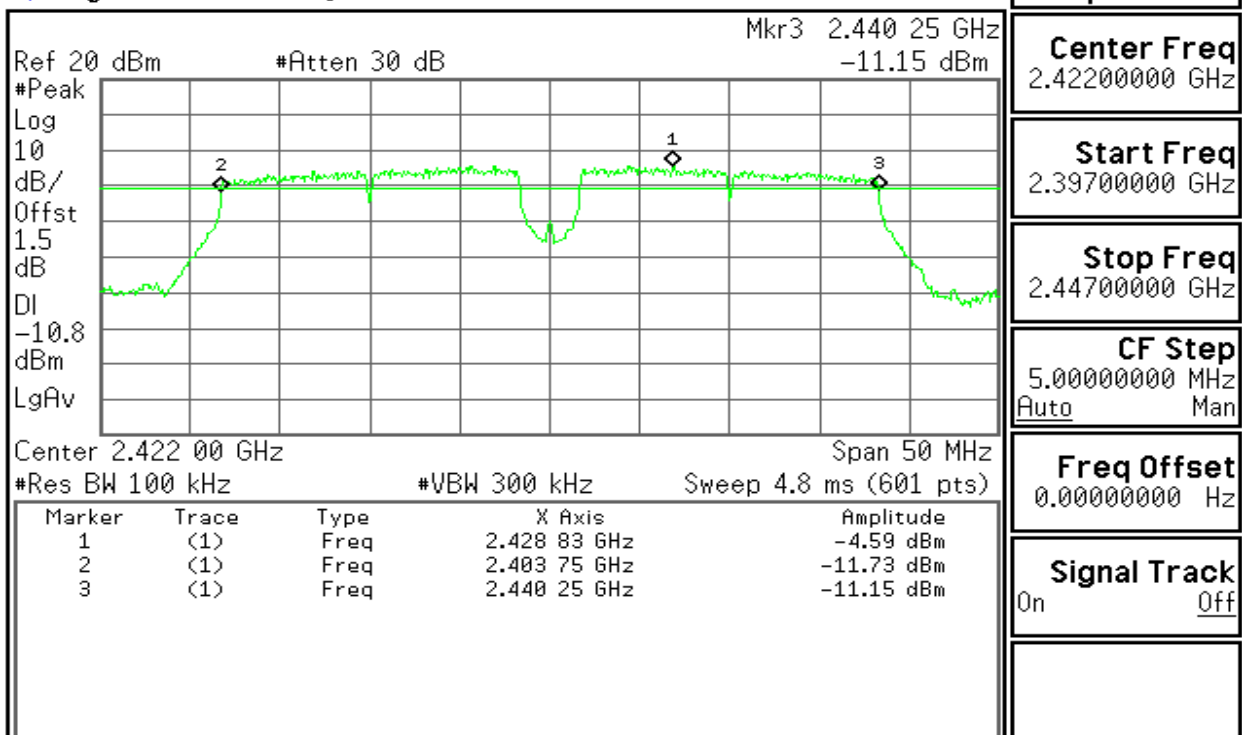


Copyright 2000-2004 Agilent Technologies



6dB Bandwidth (CH Mid)


* Agilent 14:58:59 Aug 3, 2006

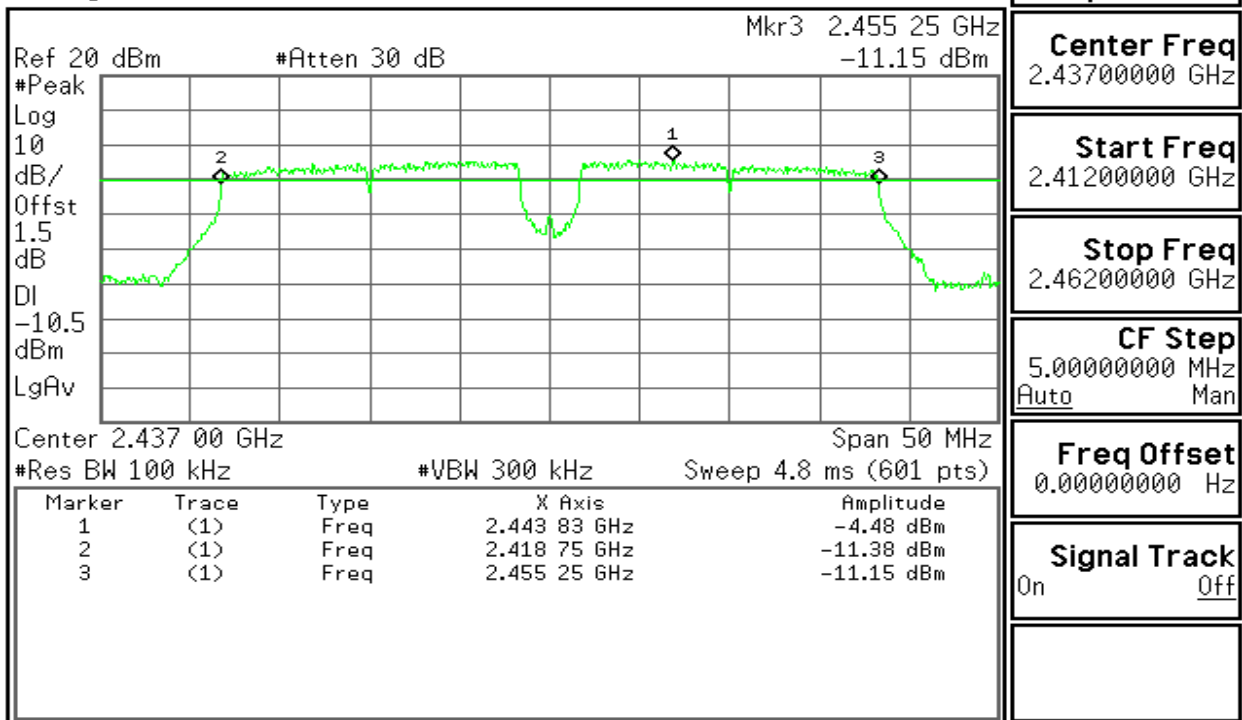

Copyright 2000-2004 Agilent Technologies

6dB Bandwidth (CH High)

* Agilent 14:57:45 Aug 3, 2006

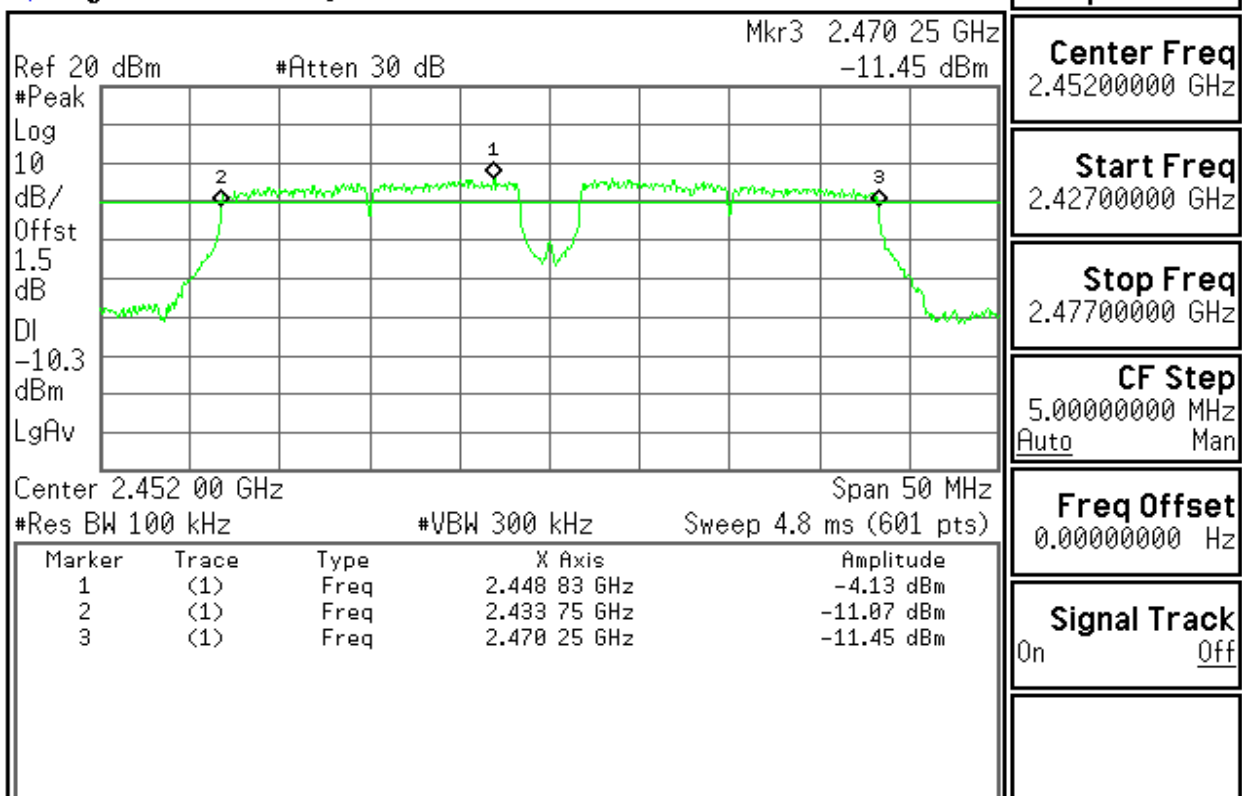


Copyright 2000-2004 Agilent Technologies



draft 802.11n Standard-20 MHz Channel mode / Chain 0

6dB Bandwidth (CH Low)


* Agilent 13:53:12 Aug 2, 2006

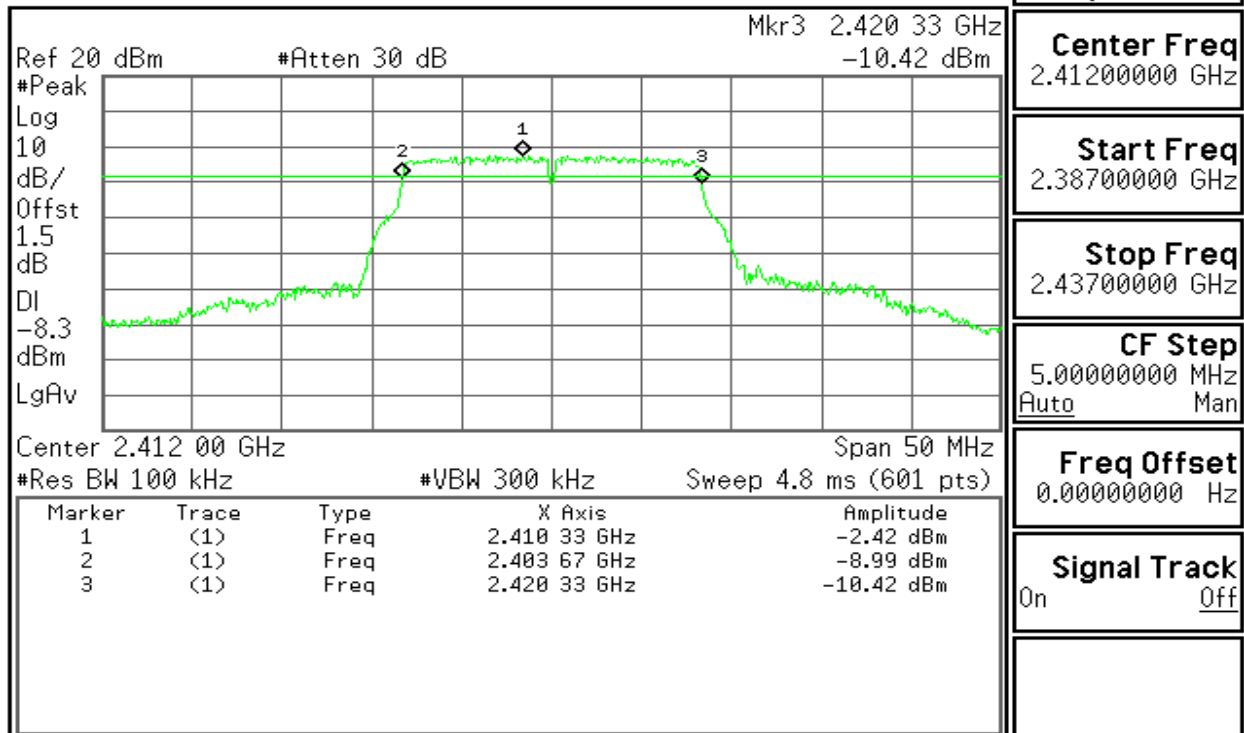

Copyright 2000-2003 Agilent Technologies

6dB Bandwidth (CH Mid)

* Agilent 13:54:29 Aug 2, 2006

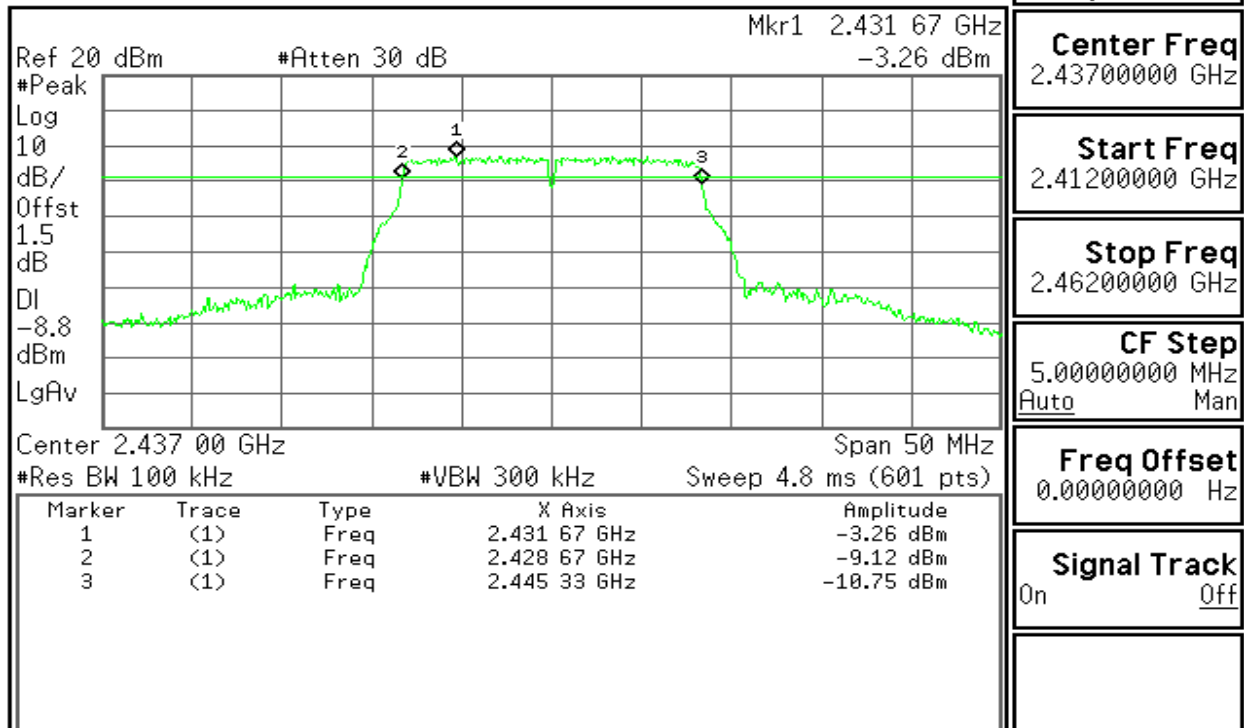


Copyright 2000-2003 Agilent Technologies



6dB Bandwidth (CH High)

Agilent 13:55:32 Aug 2, 2006

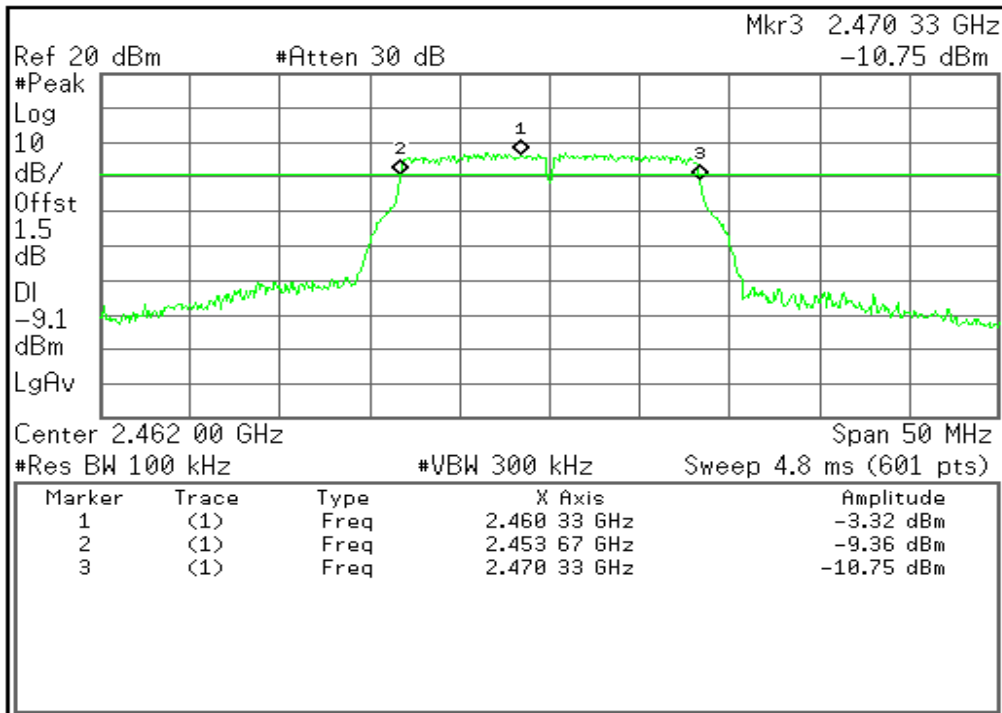


Freq/Channel
Center Freq 2.46200000 GHz
Start Freq 2.43700000 GHz
Stop Freq 2.48700000 GHz
CF Step 5.00000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Copyright 2000-2003 Agilent Technologies

draft 802.11n Standard-20 MHz Channel mode / Chain 1

6dB Bandwidth (CH Low)

Agilent 14:00:42 Aug 2, 2006

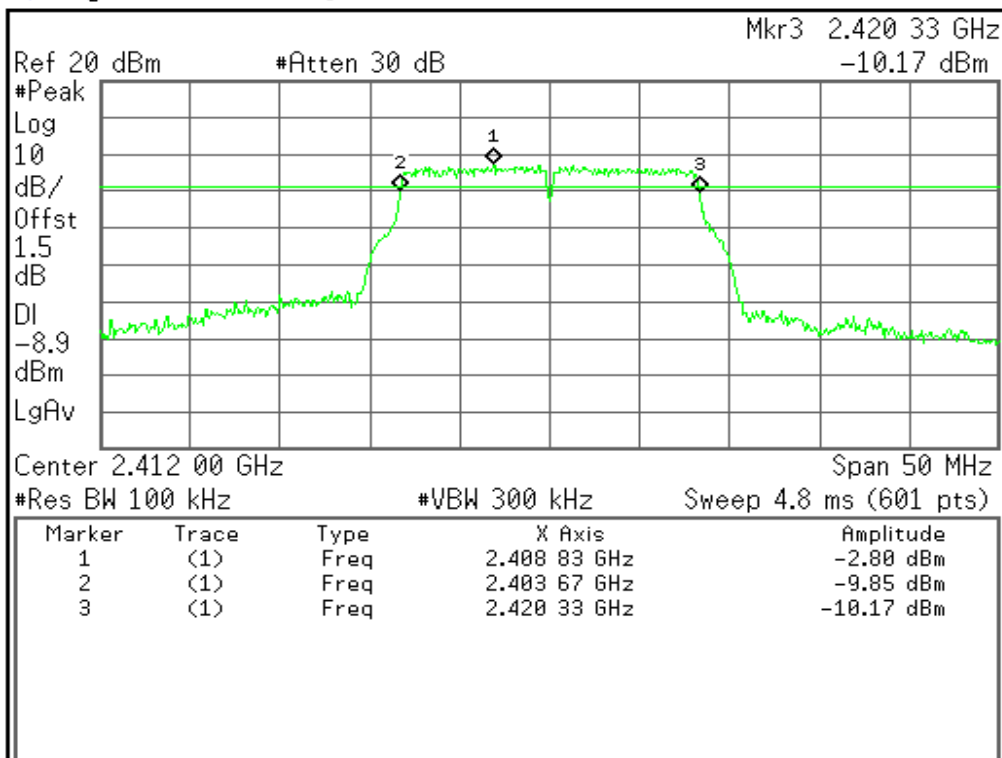


Freq/Channel
Center Freq 2.41200000 GHz
Start Freq 2.38700000 GHz
Stop Freq 2.43700000 GHz
CF Step 5.00000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Copyright 2000-2003 Agilent Technologies



6dB Bandwidth (CH Mid)

Agilent 13:59:30 Aug 2, 2006

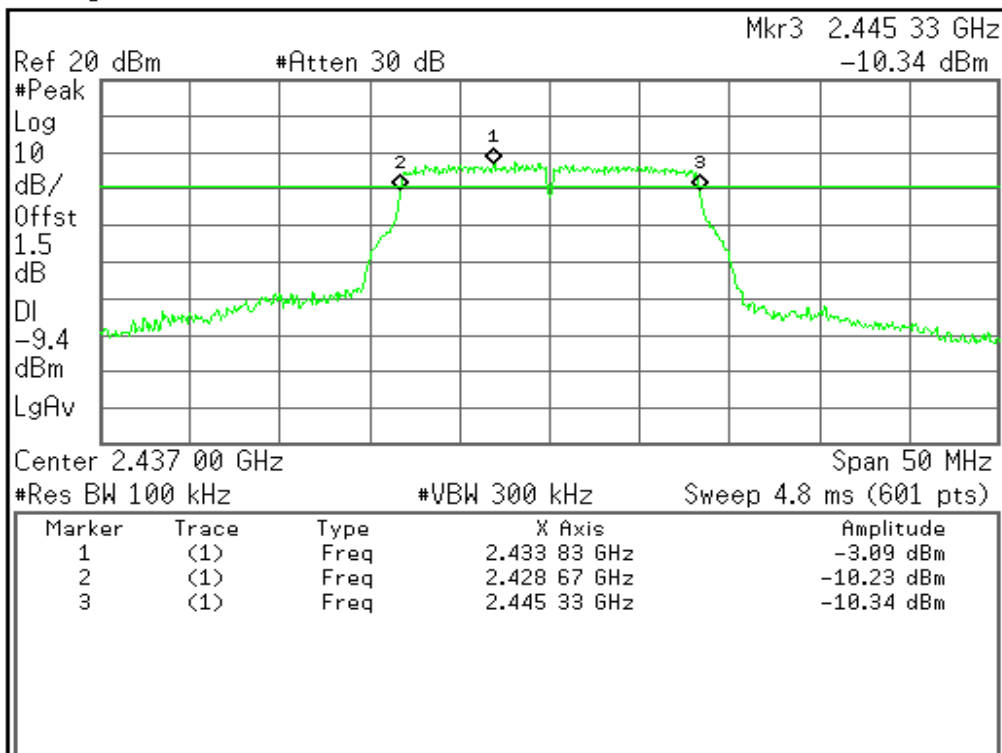


Freq/Channel
Center Freq 2.43700000 GHz
Start Freq 2.41200000 GHz
Stop Freq 2.46200000 GHz
CF Step 5.00000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Copyright 2000-2003 Agilent Technologies

6dB Bandwidth (CH High)

Agilent 13:58:03 Aug 2, 2006

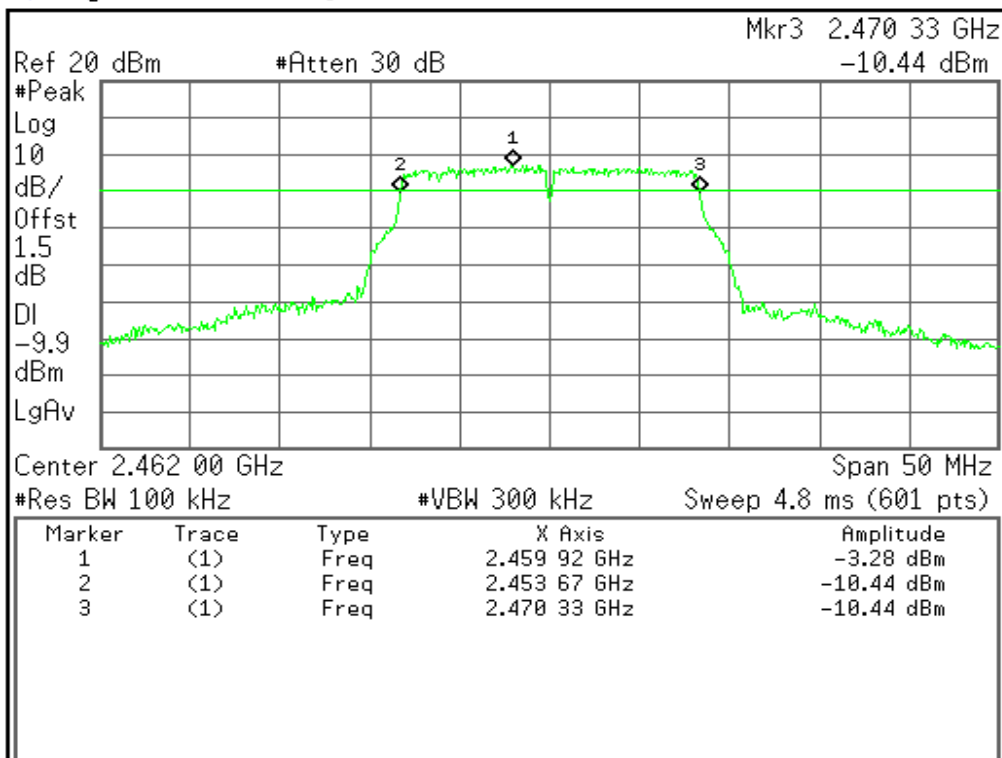

Freq/Channel
Center Freq 2.46200000 GHz
Start Freq 2.43700000 GHz
Stop Freq 2.48700000 GHz
CF Step 5.00000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off


Unable to save file



draft 802.11n Wide-40 MHz Channel mode / Chain 0


6dB Bandwidth (CH Low)

* Agilent 14:20:46 Aug 2, 2006

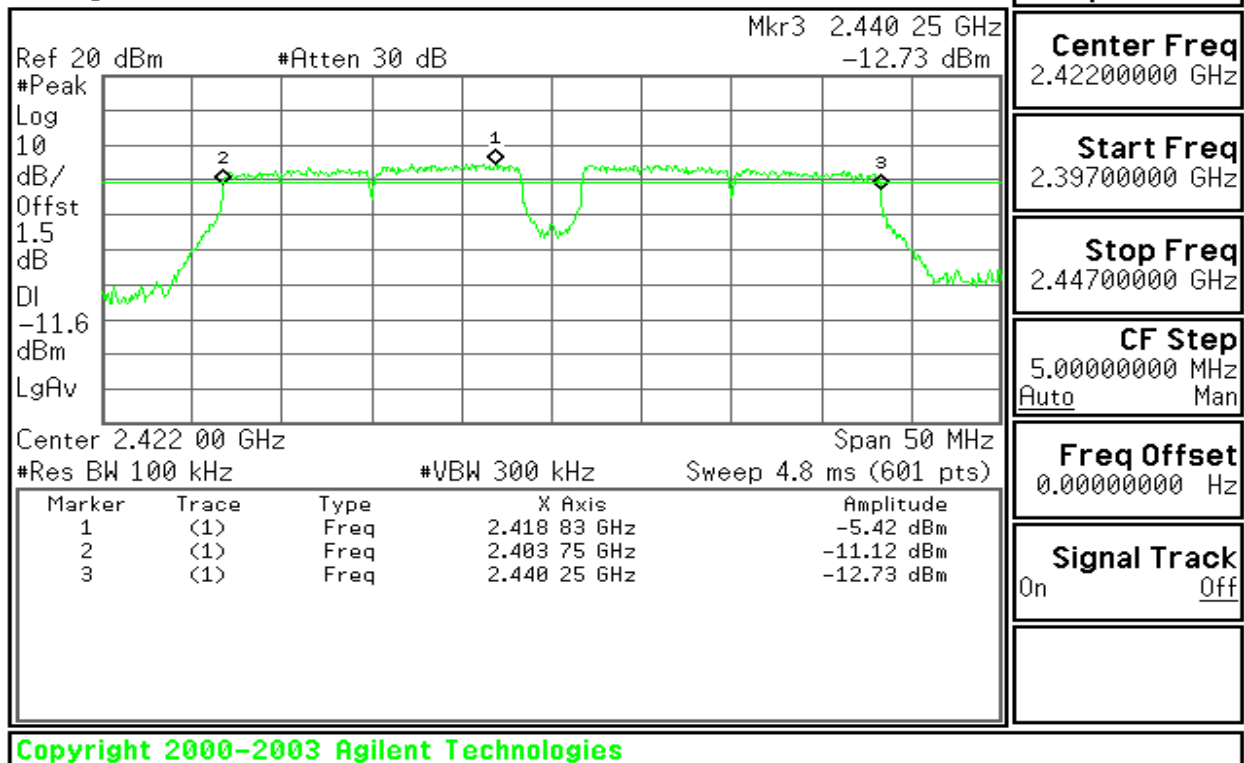

6dB Bandwidth (CH Mid)


* Agilent 14:19:26 Aug 2, 2006

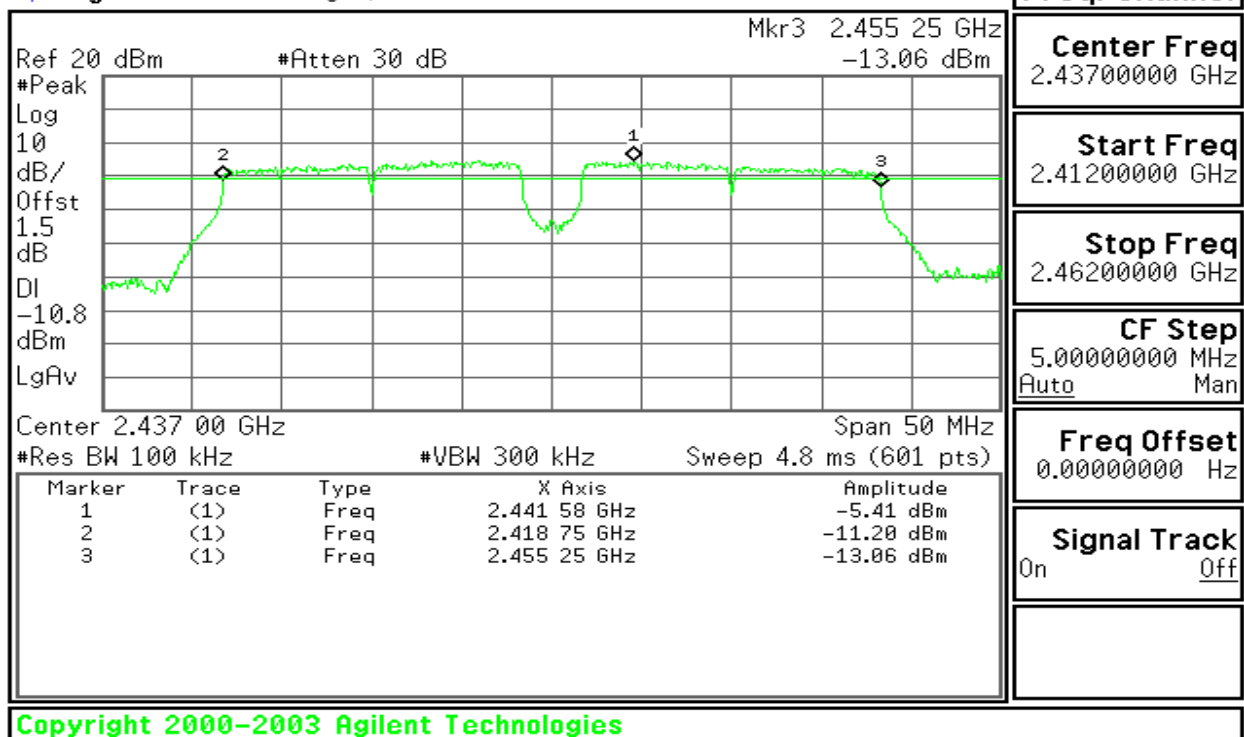



6dB Bandwidth (CH High)


* Agilent 14:18:32 Aug 2, 2006

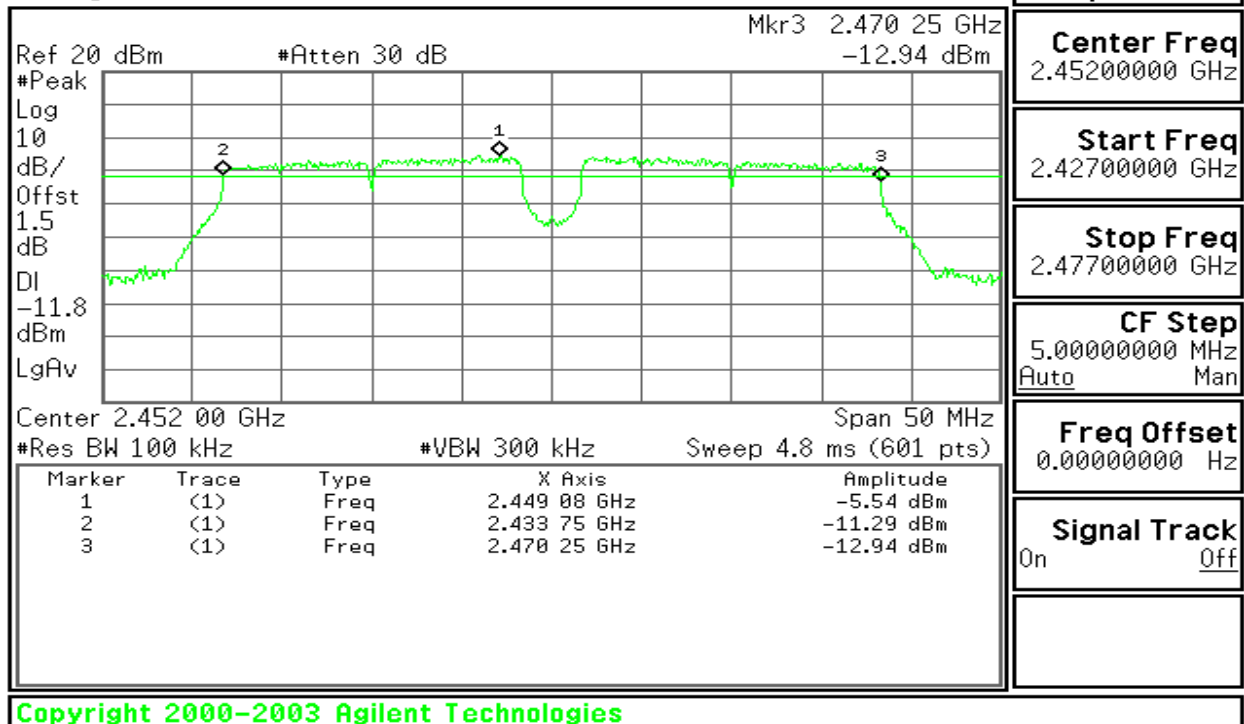

draft 802.11n Wide-40 MHz Channel mode / Chain 1

6dB Bandwidth (CH Low)


* Agilent 14:12:09 Aug 2, 2006

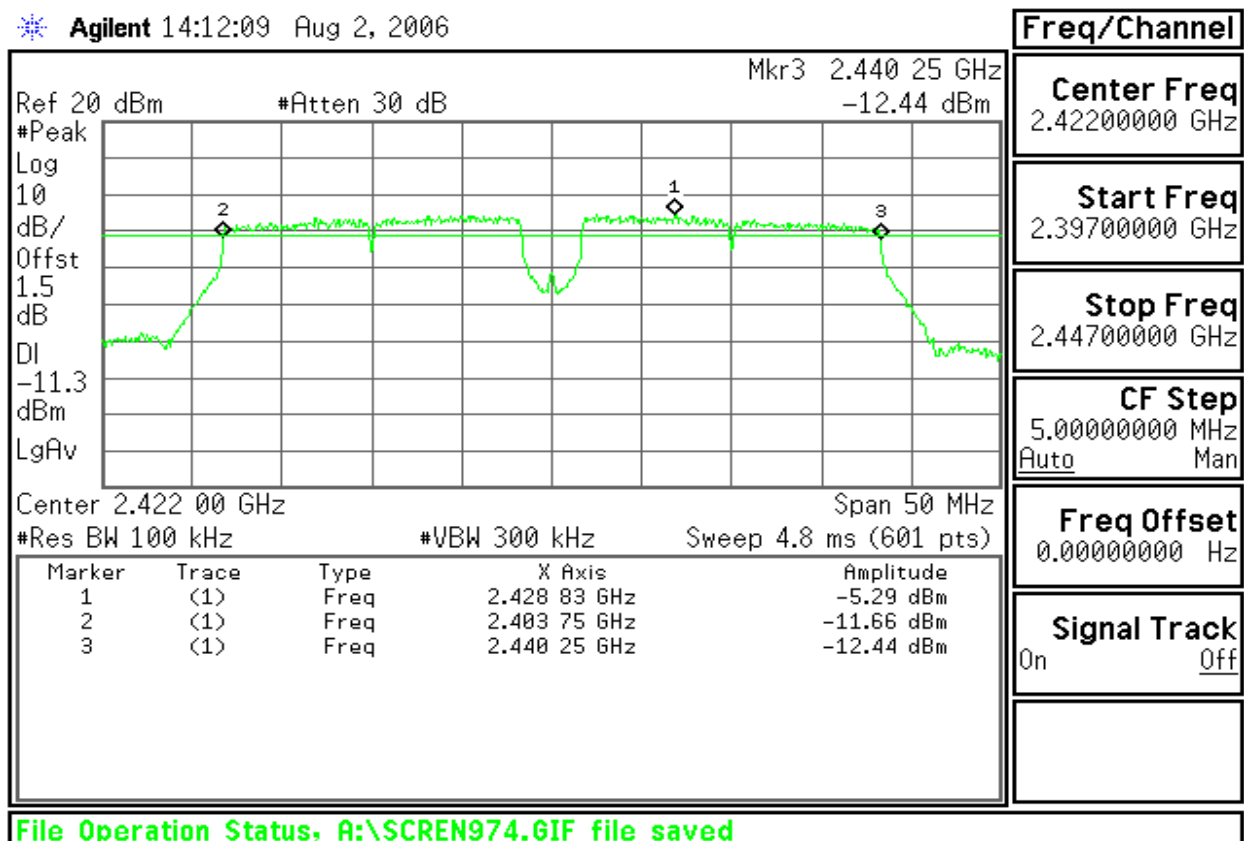




6dB Bandwidth (CH Mid)

* Agilent 14:13:06 Aug 2, 2006

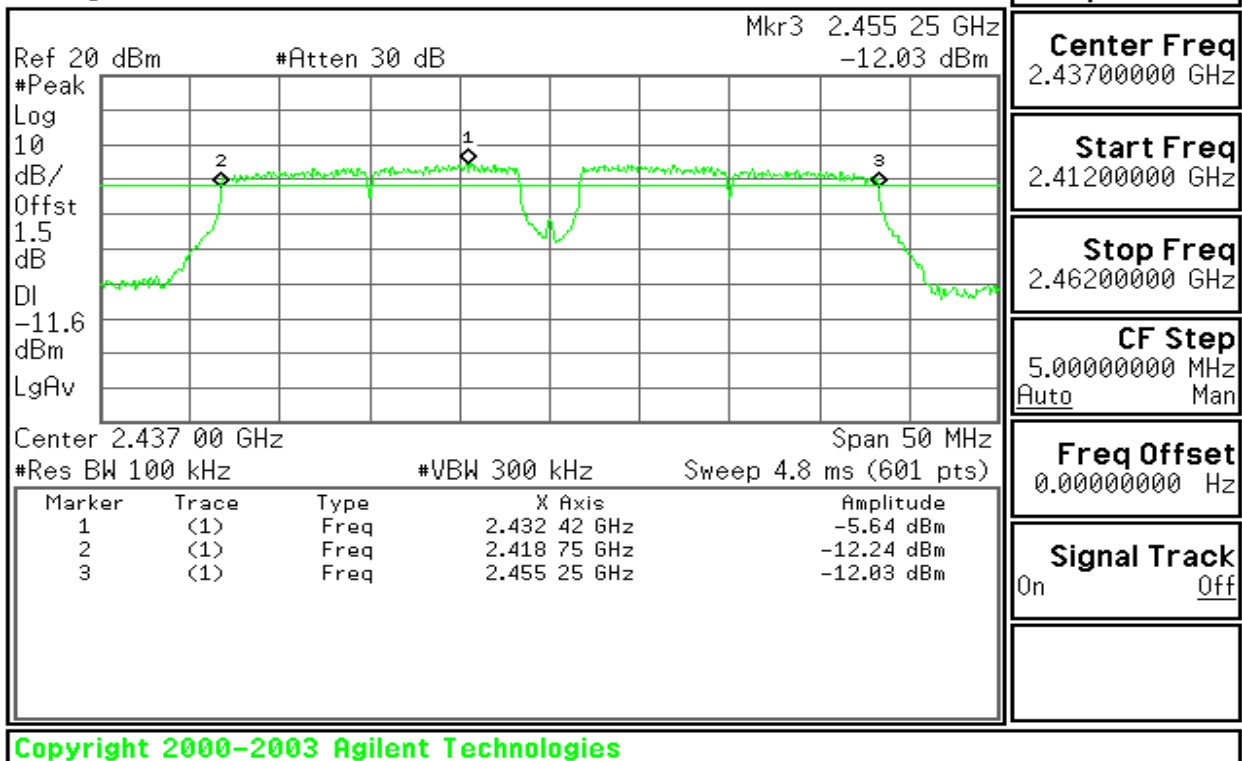

6dB Bandwidth (CH High)

* Agilent 14:14:12 Aug 2, 2006

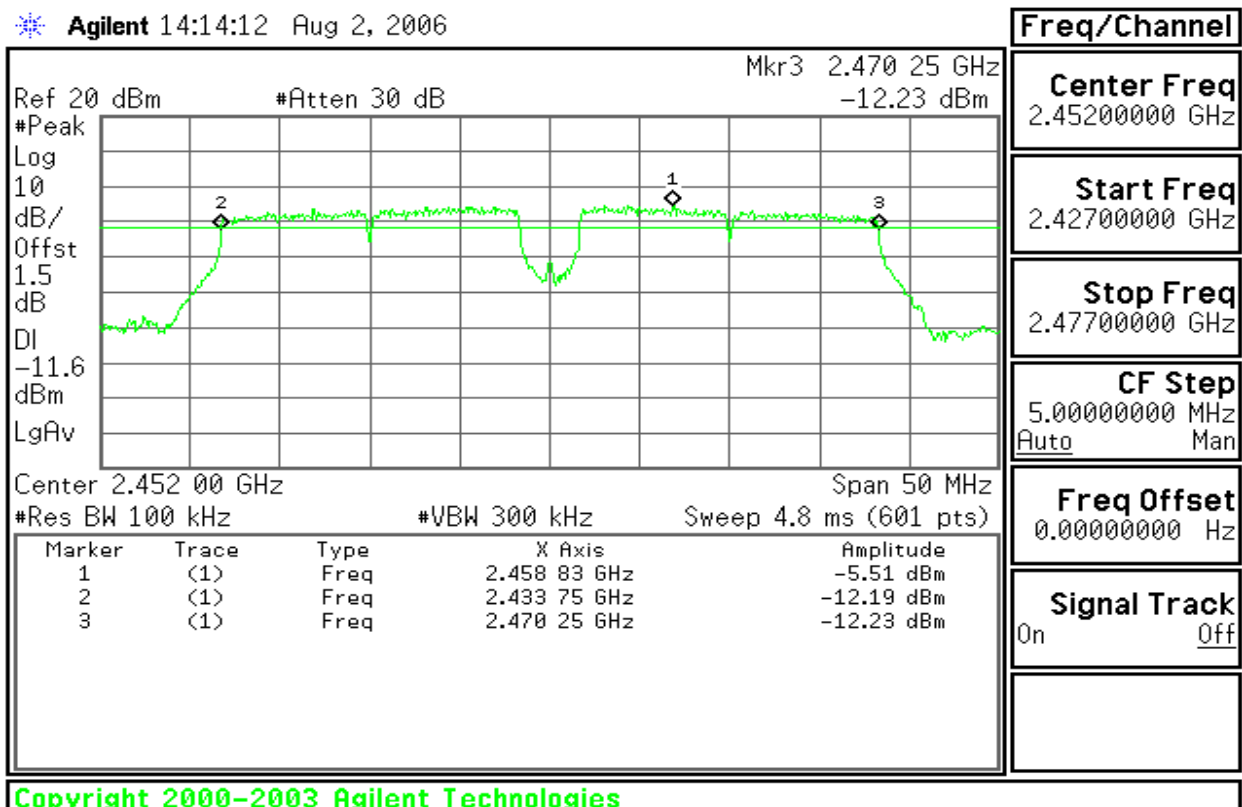




99% bandwidth

LIMIT

None; for reporting purposes only

Test Configuration



TEST PROCEDURE

6. Place the EUT on the table and set it in the transmitting mode.
7. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
8. Set the spectrum analyzer as VBW > 3RBW, Span = 50 MHz, Sweep = auto.
9. The spectrum analyzer internal 99% bandwidth function is utilized.

**TEST RESULTS***No non-compliance noted***Test Data****TRANSMIT CHAIN 0****IEEE 802.11b mode**

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	13.41
Mid	2437	13.33
High	2462	13.41

IEEE 802.11g 20M mode

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	16.58
Mid	2437	16.52
High	2462	16.59

IEEE 802.11g 40M mode

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2422	36.29
Mid	2437	36.24
High	2452	36.23

draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	16.61
Mid	2437	16.57
High	2462	16.58

draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2422	36.26
Mid	2437	36.18
High	2452	36.22

**TRANSMIT CHAIN 1****IEEE 802.11b mode**

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	13.22
Mid	2437	13.16
High	2462	13.12

IEEE 802.11g 20M mode

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	16.52
Mid	2437	16.55
High	2462	16.51

IEEE 802.11g 40M mode

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2422	36.22
Mid	2437	36.22
High	2452	36.20

draft 802.11n Standard-20 MHz Channel mode


Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2412	16.53
Mid	2437	16.51
High	2462	16.52

draft 802.11n Wide-40 MHz Channel mode


Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2422	36.20
Mid	2437	36.22
High	2452	36.25

**Test Plot****IEEE 802.11b MODE CHAIN 0****99% Bandwidth (CH Low)**

* Agilent 11:46:06 Jul 19, 2006

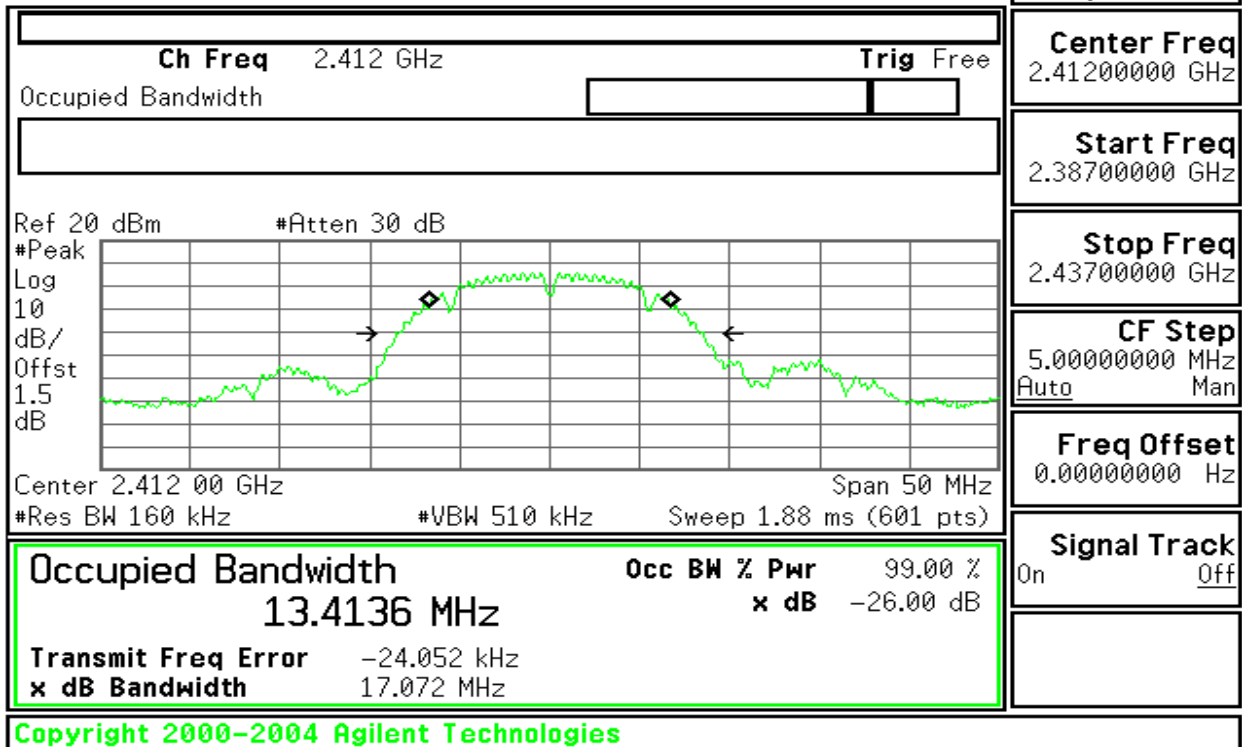
**99% Bandwidth (CH Mid)**

* Agilent 11:47:10 Jul 19, 2006

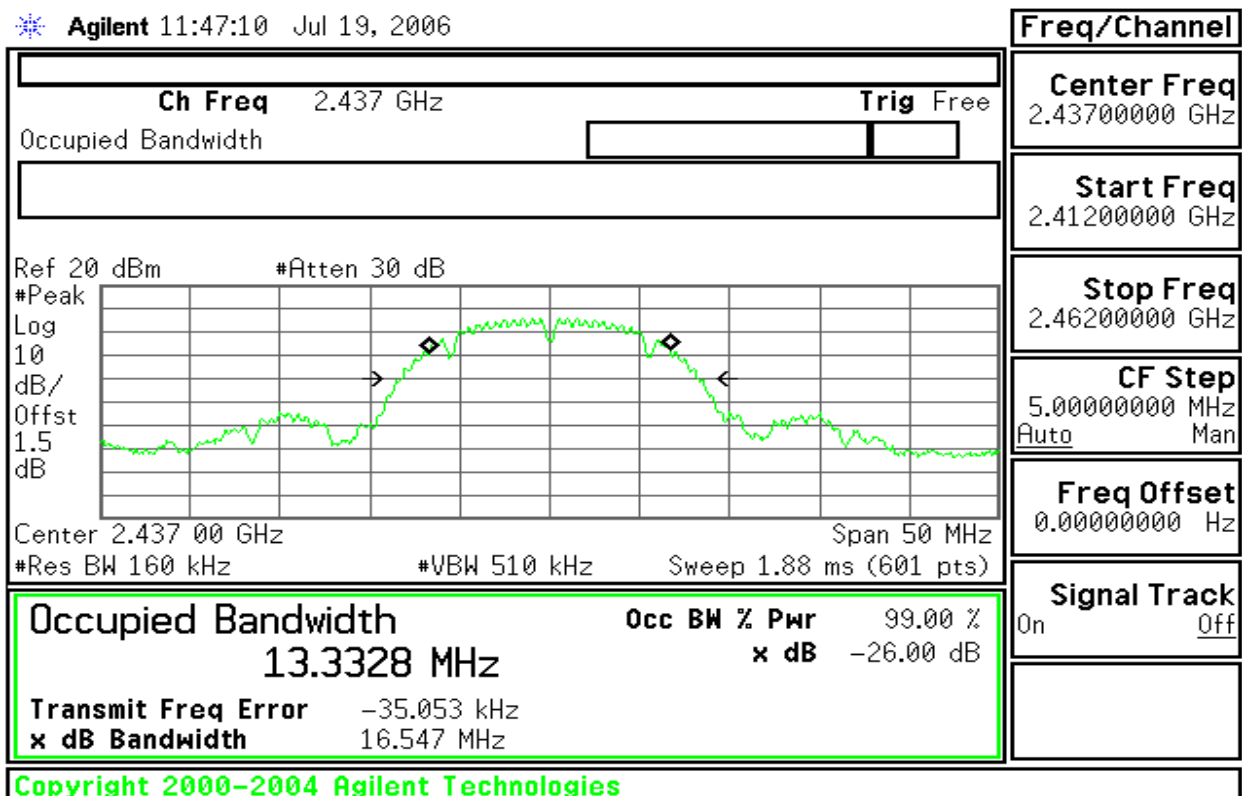


**99% Bandwidth (CH High)**

* Agilent 11:48:59 Jul 19, 2006

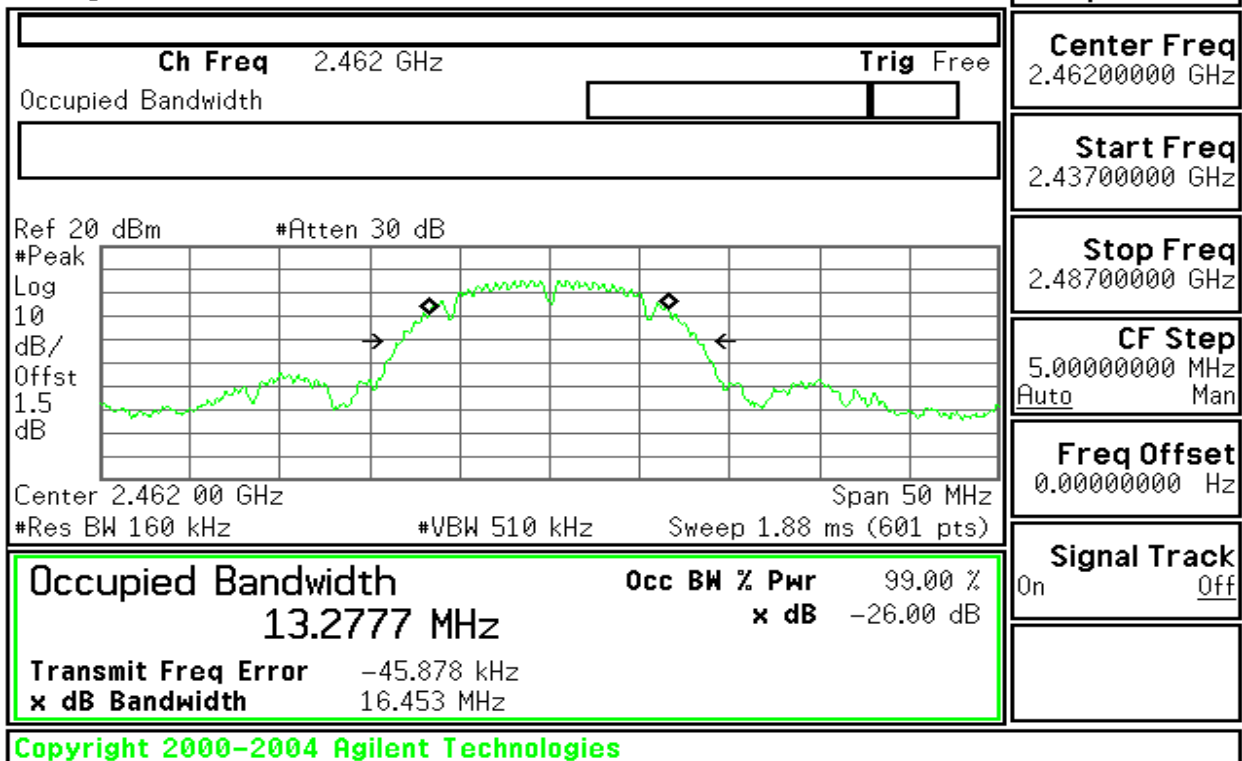**IEEE 802.11b MODE CHAIN 1****99% Bandwidth (CH Low)**


* Agilent 12:37:00 Jul 19, 2006

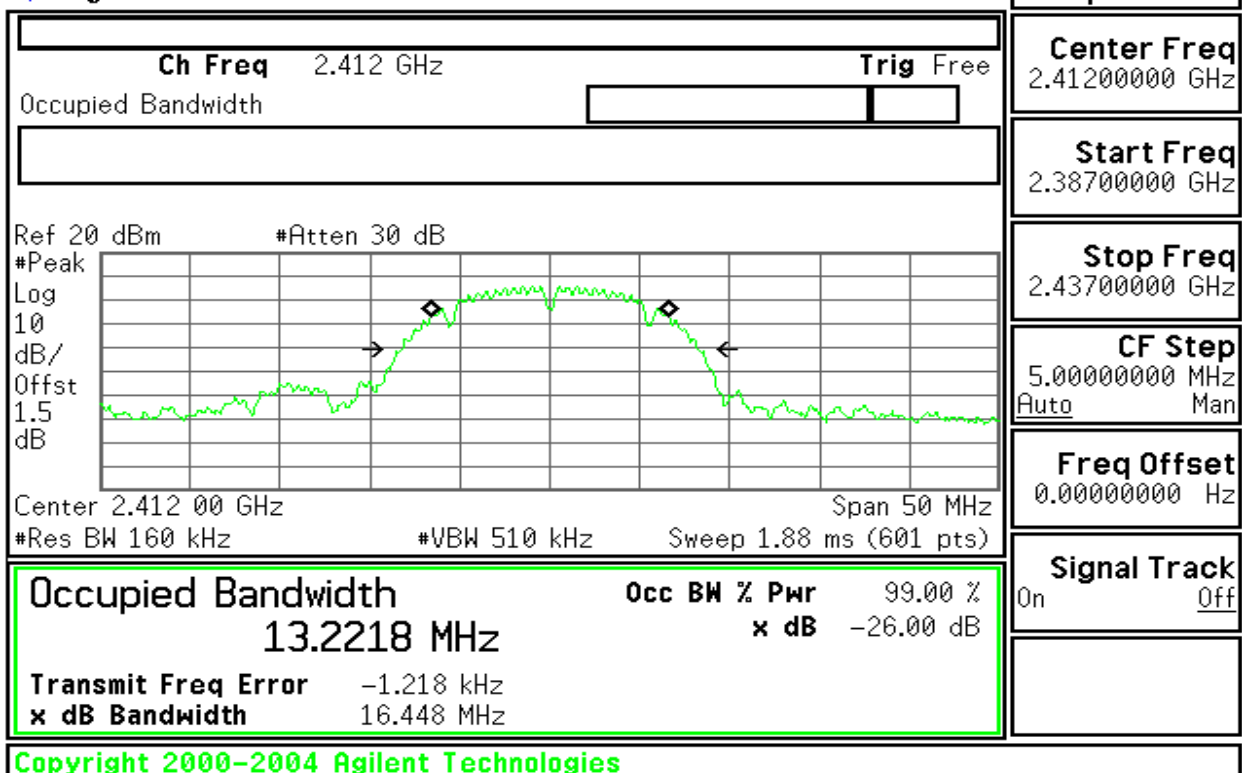




99% Bandwidth (CH Mid)

Agilent 12:37:37 Jul 19, 2006

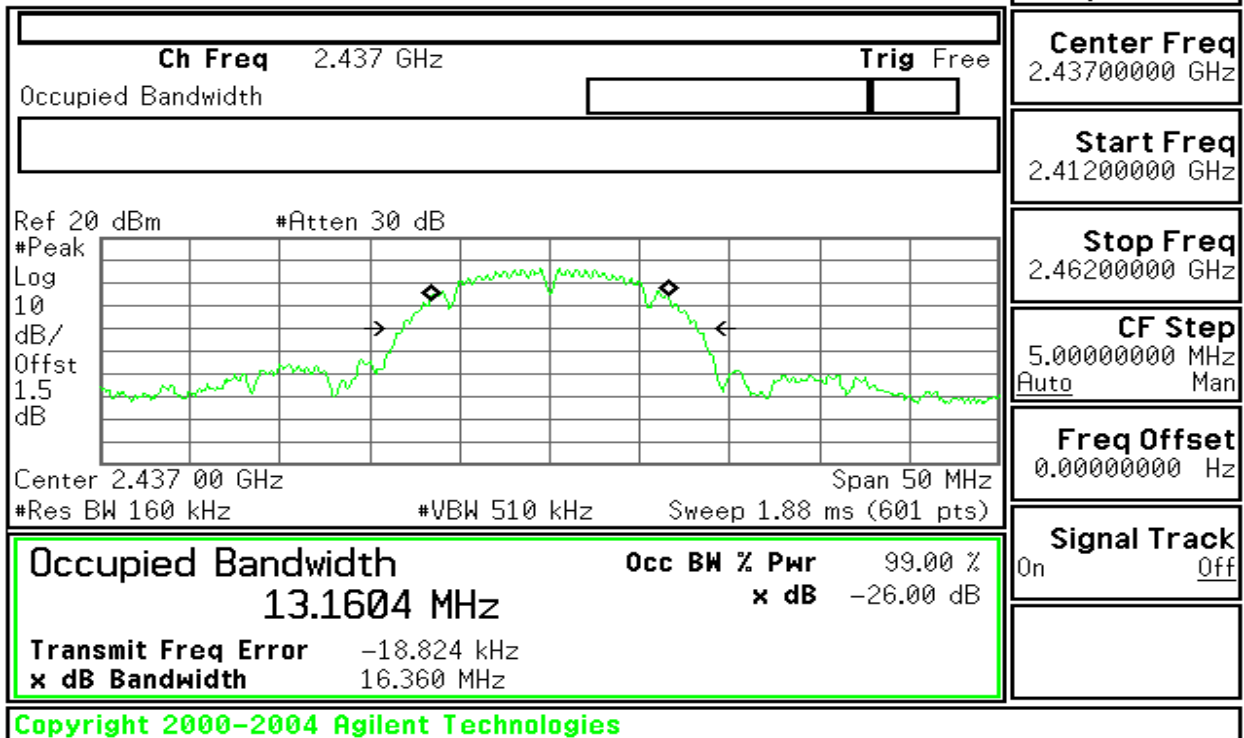


99% Bandwidth (CH High)

Agilent 12:40:43 Jul 19, 2006

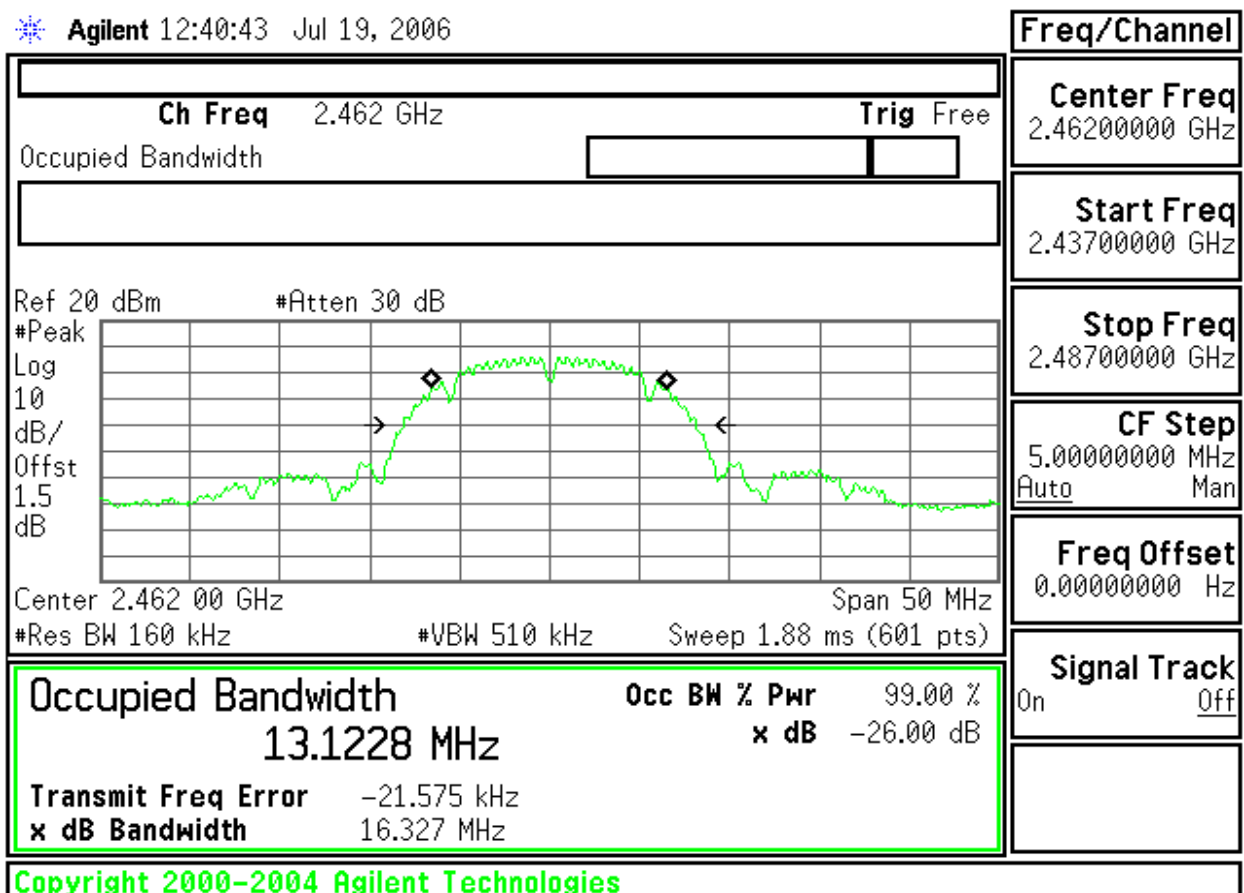


**IEEE 802.11g 20M MODE CHAIN 0****99% Bandwidth (CH Low)**

* Agilent 11:54:04 Jul 19, 2006

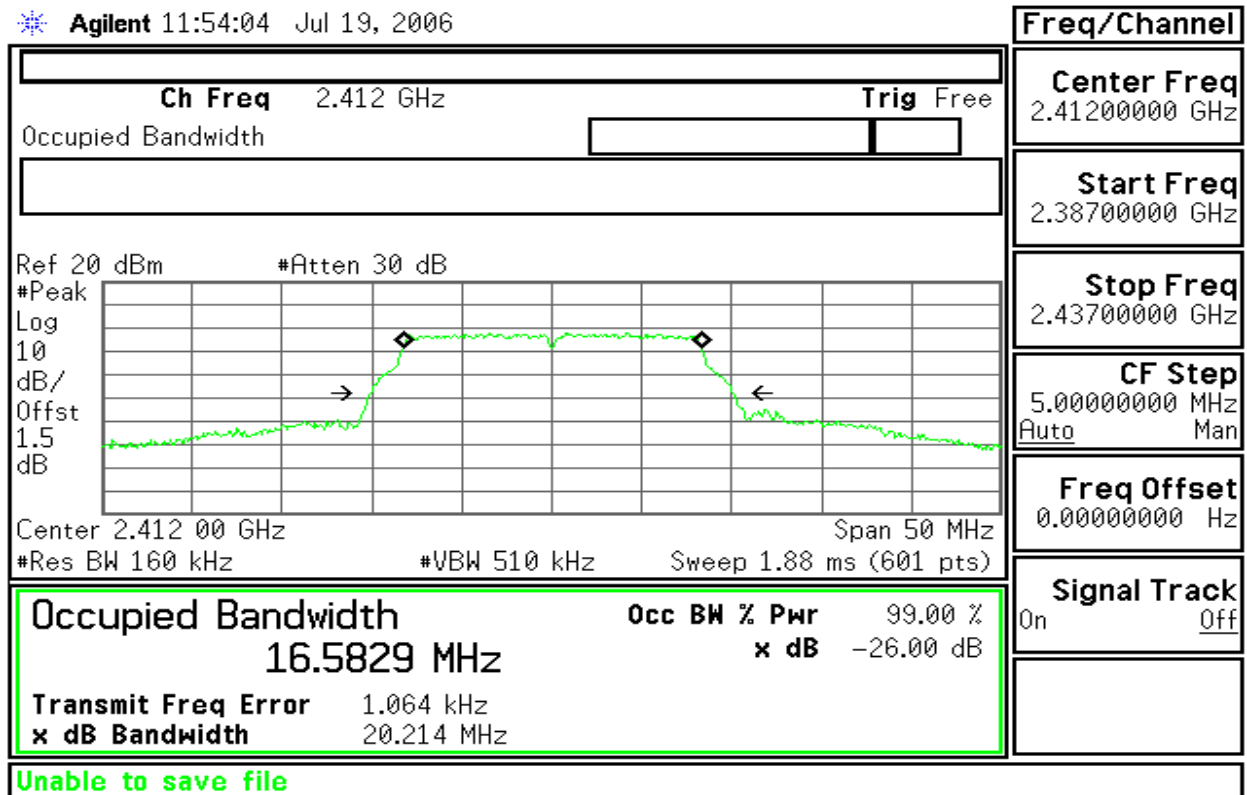**99% Bandwidth (CH Mid)**


* Agilent 11:54:46 Jul 19, 2006

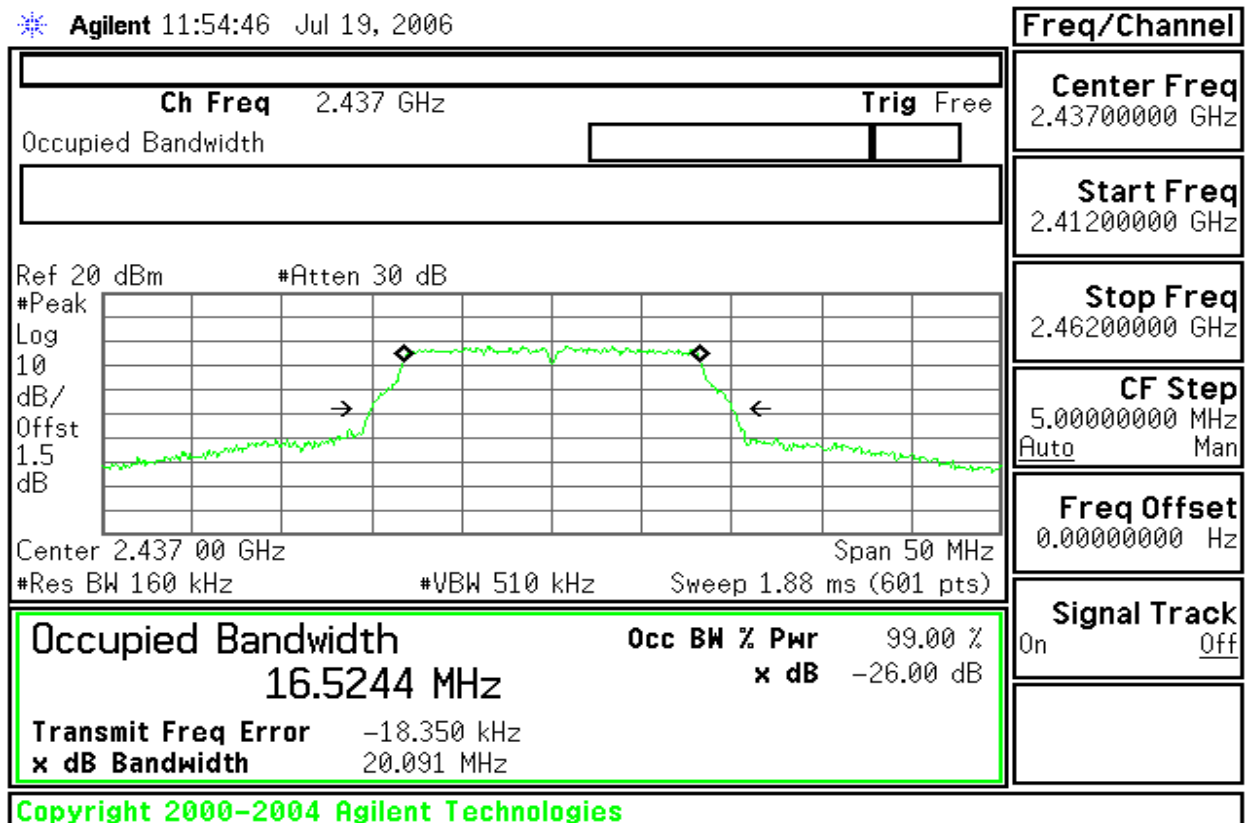



99% Bandwidth (CH High)


* Agilent 11:55:25 Jul 19, 2006

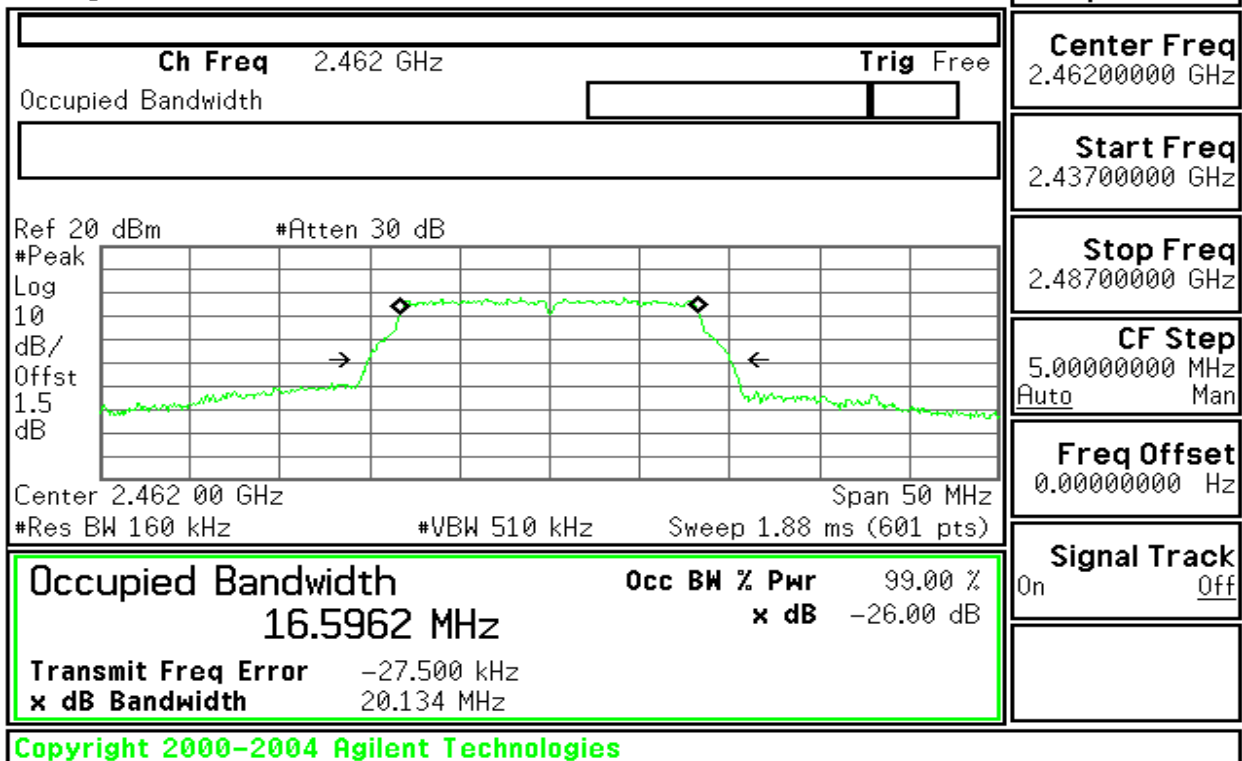

IEEE 802.11g 20M MODE CHAIN 1

99% Bandwidth (CH Low)


* Agilent 11:58:18 Jul 19, 2006

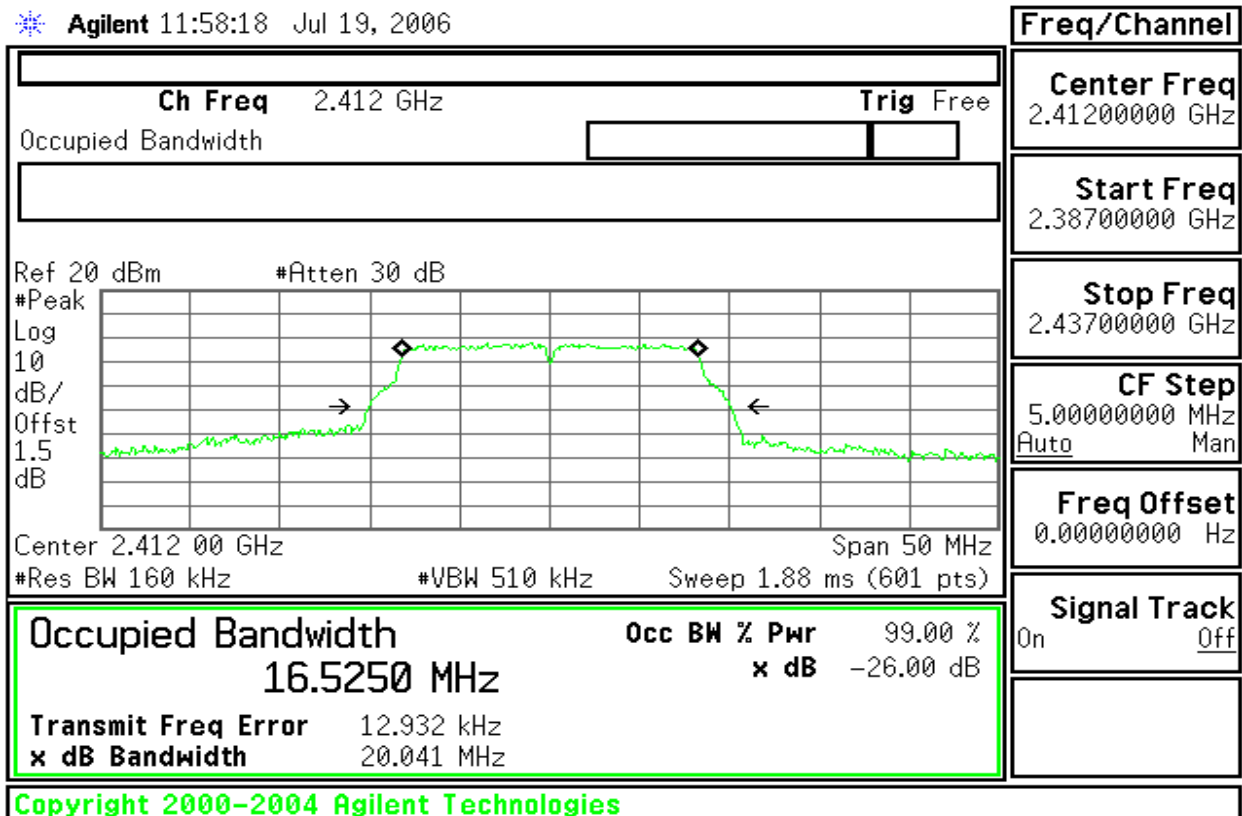




99% Bandwidth (CH Mid)

* Agilent 11:58:54 Jul 19, 2006

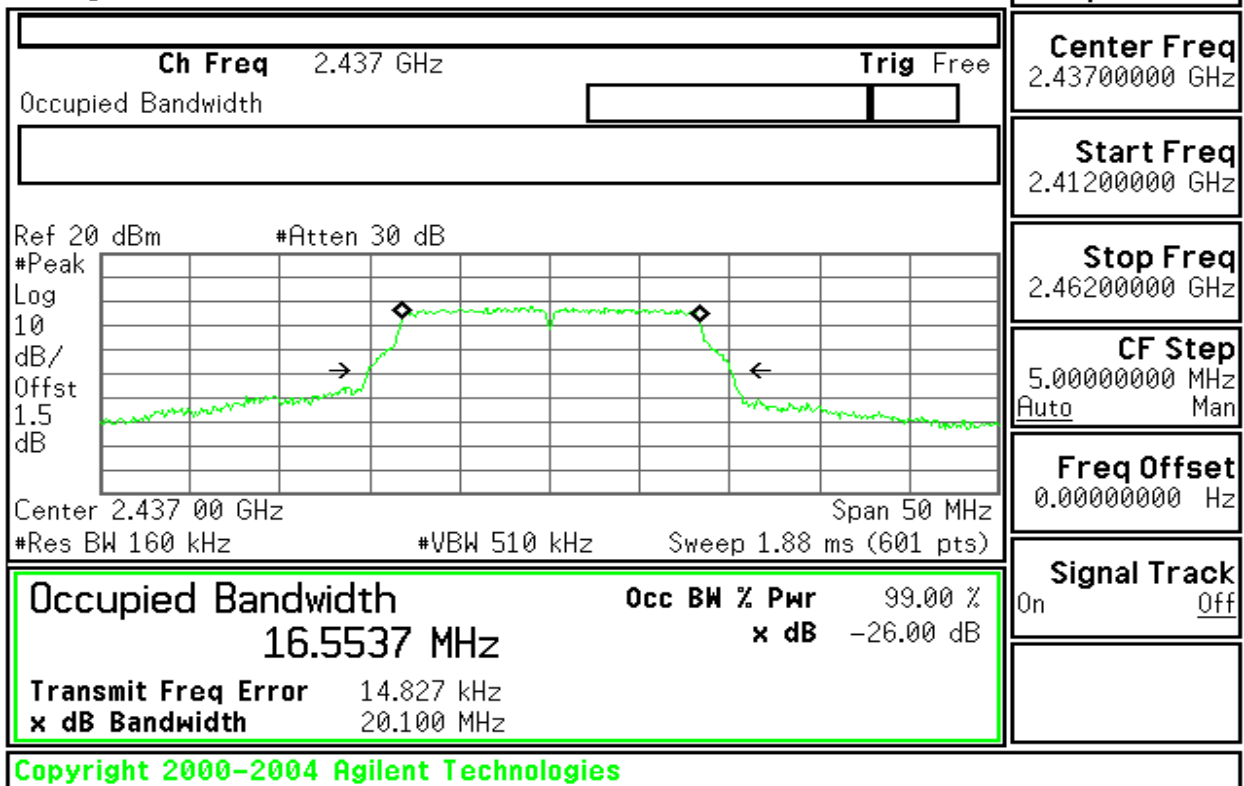


99% Bandwidth (CH High)

* Agilent 11:59:25 Jul 19, 2006

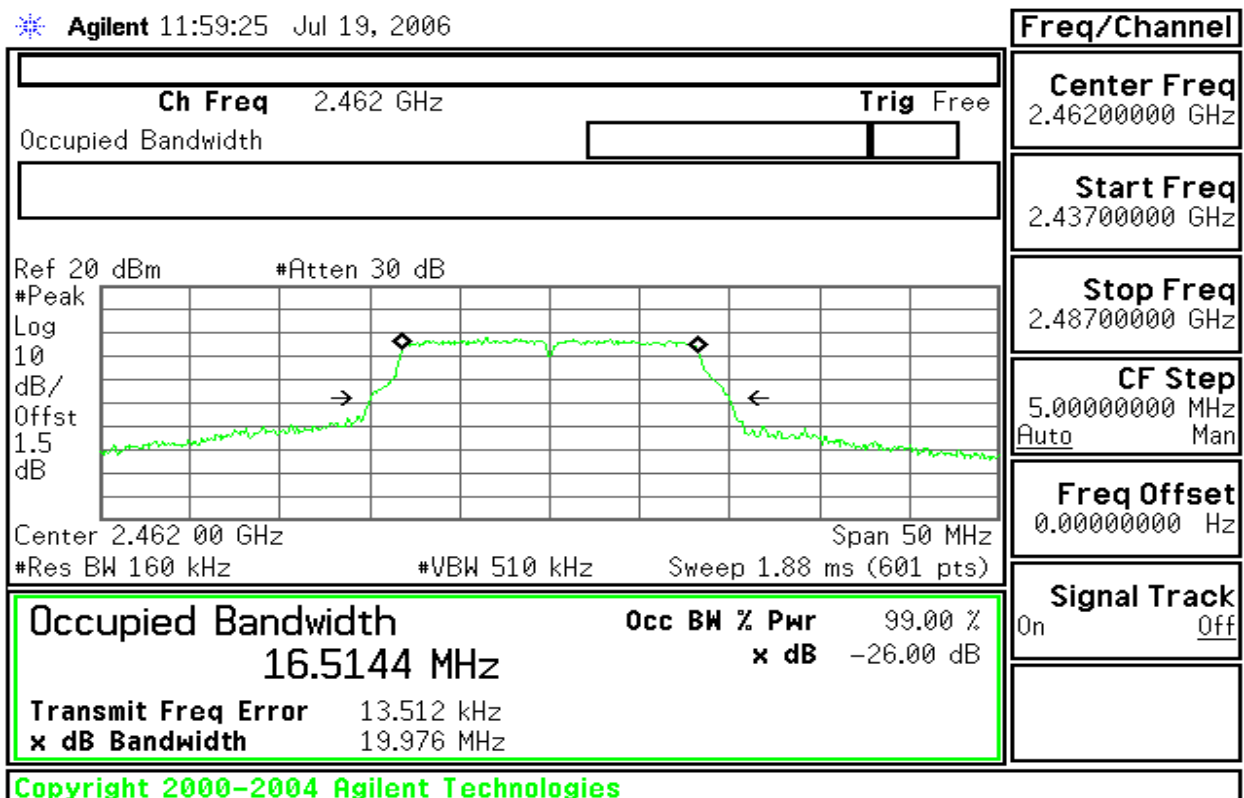


**IEEE 802.11g 40M MODE CHAIN 0****99% Bandwidth (CH Low)**

* Agilent 15:29:41 Aug 3, 2006

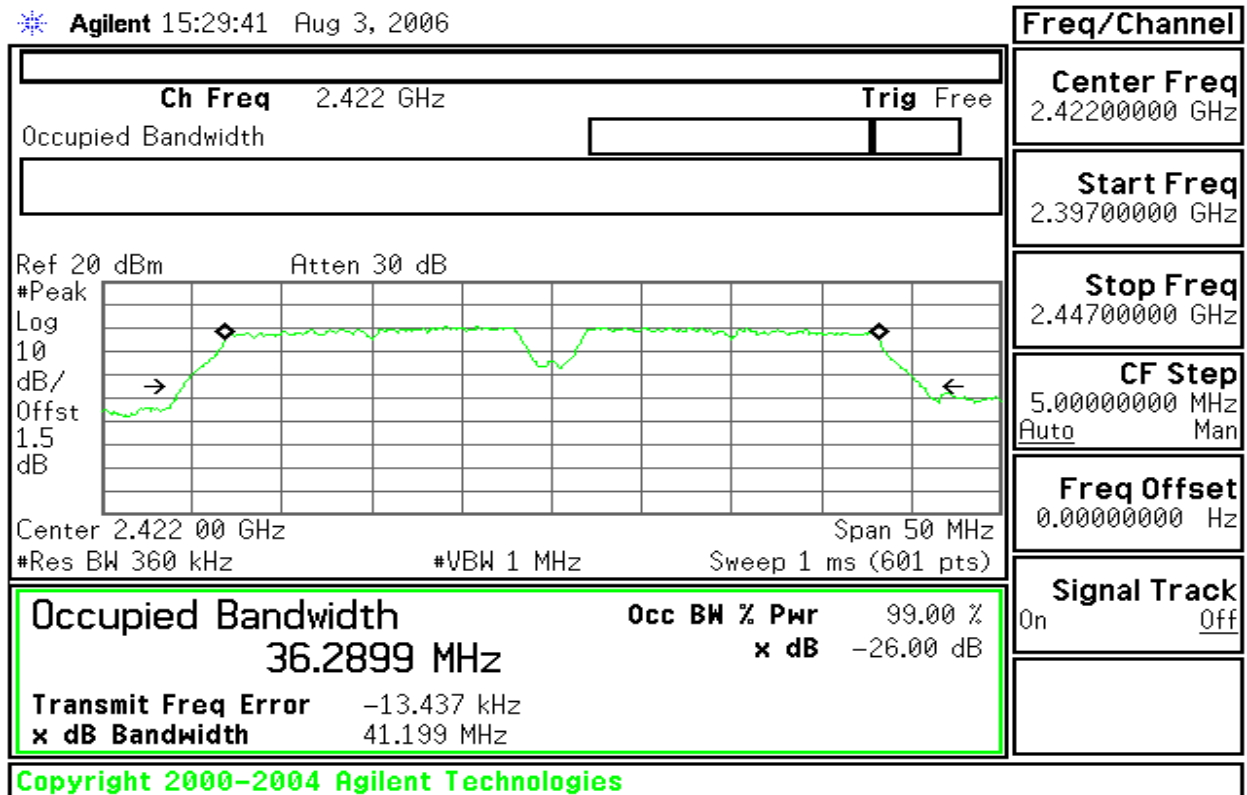
**99% Bandwidth (CH Mid)**

* Agilent 15:31:28 Aug 3, 2006

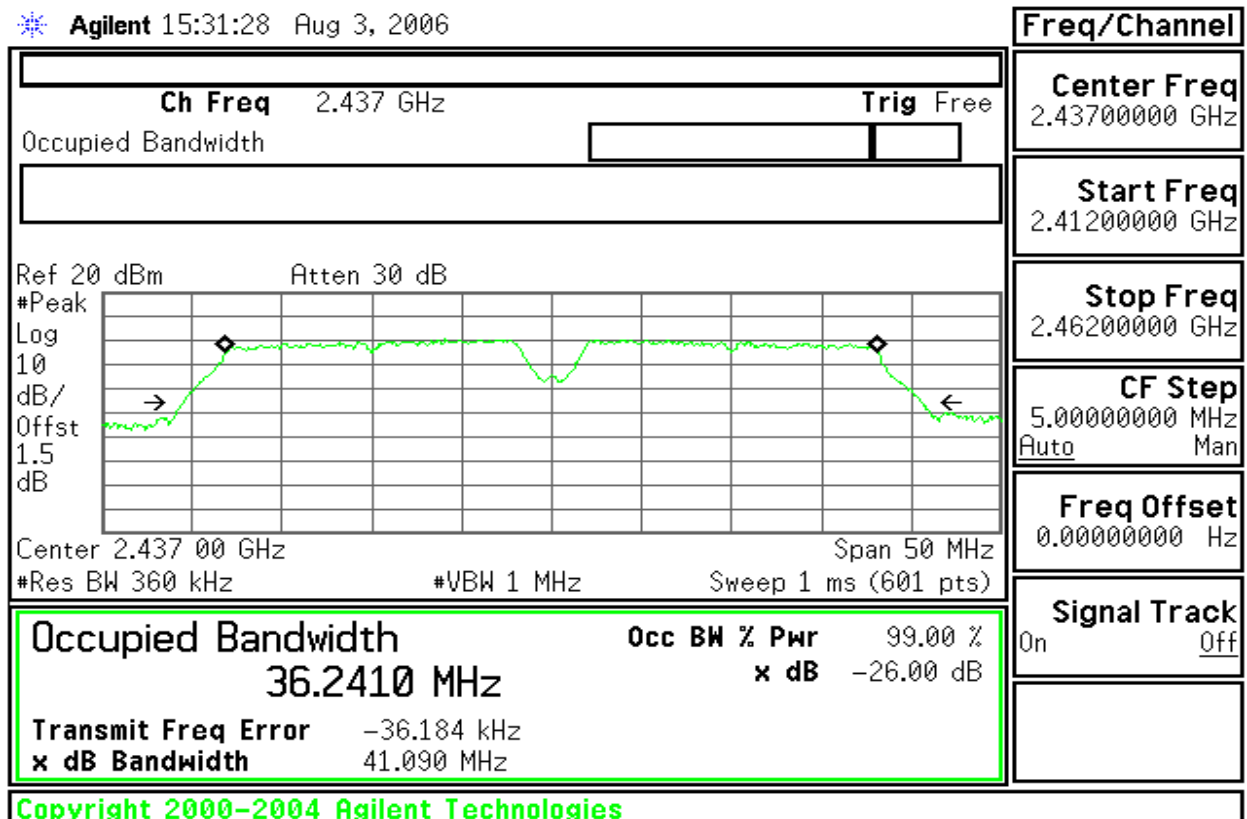


**99% Bandwidth (CH High)**

* Agilent 15:32:04 Aug 3, 2006

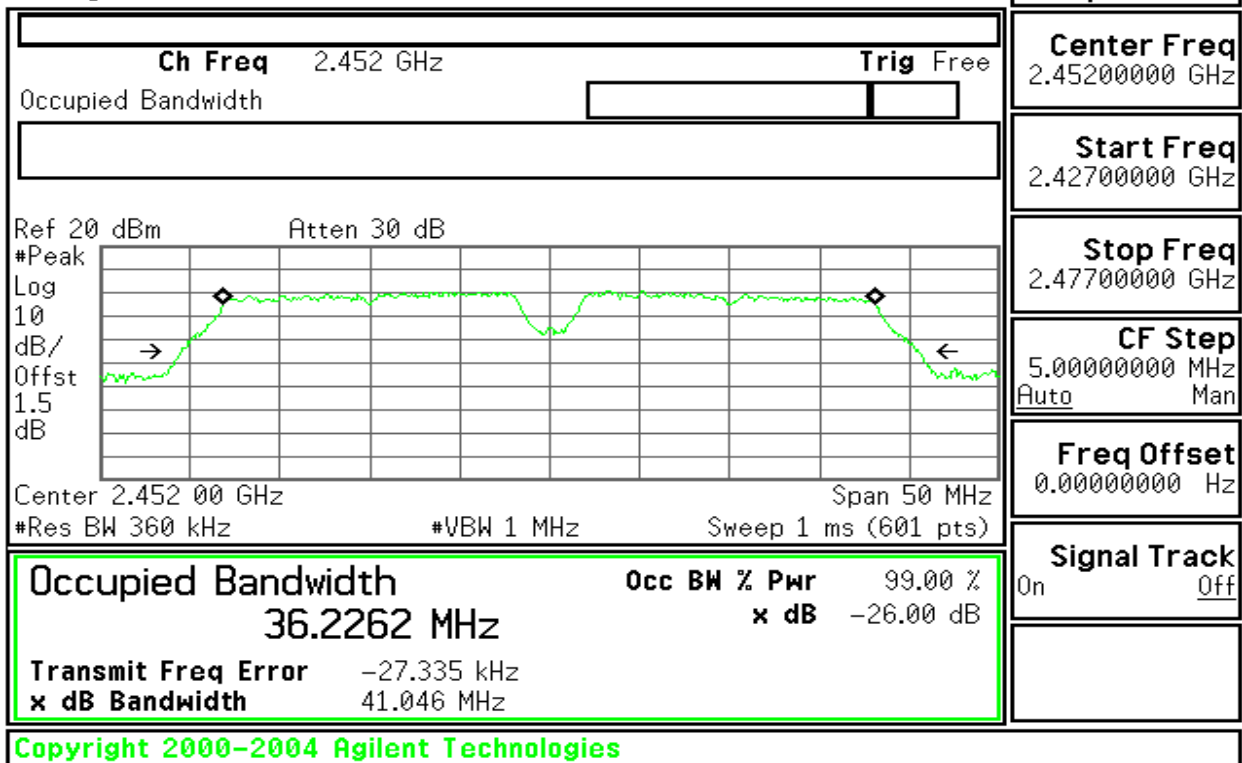**IEEE 802.11g 40M MODE CHAIN 1****99% Bandwidth (CH Low)**


* Agilent 15:34:43 Aug 3, 2006

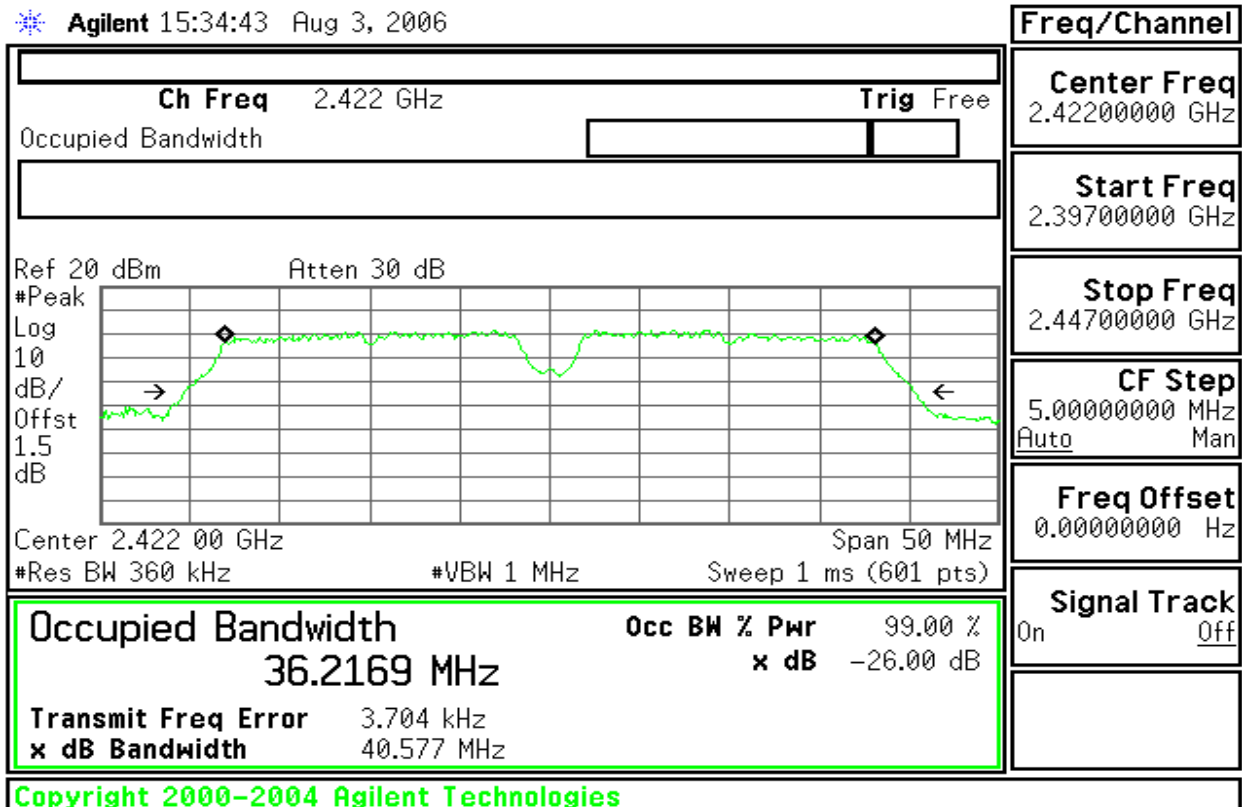




99% Bandwidth (CH Mid)

* Agilent 15:33:57 Aug 3, 2006

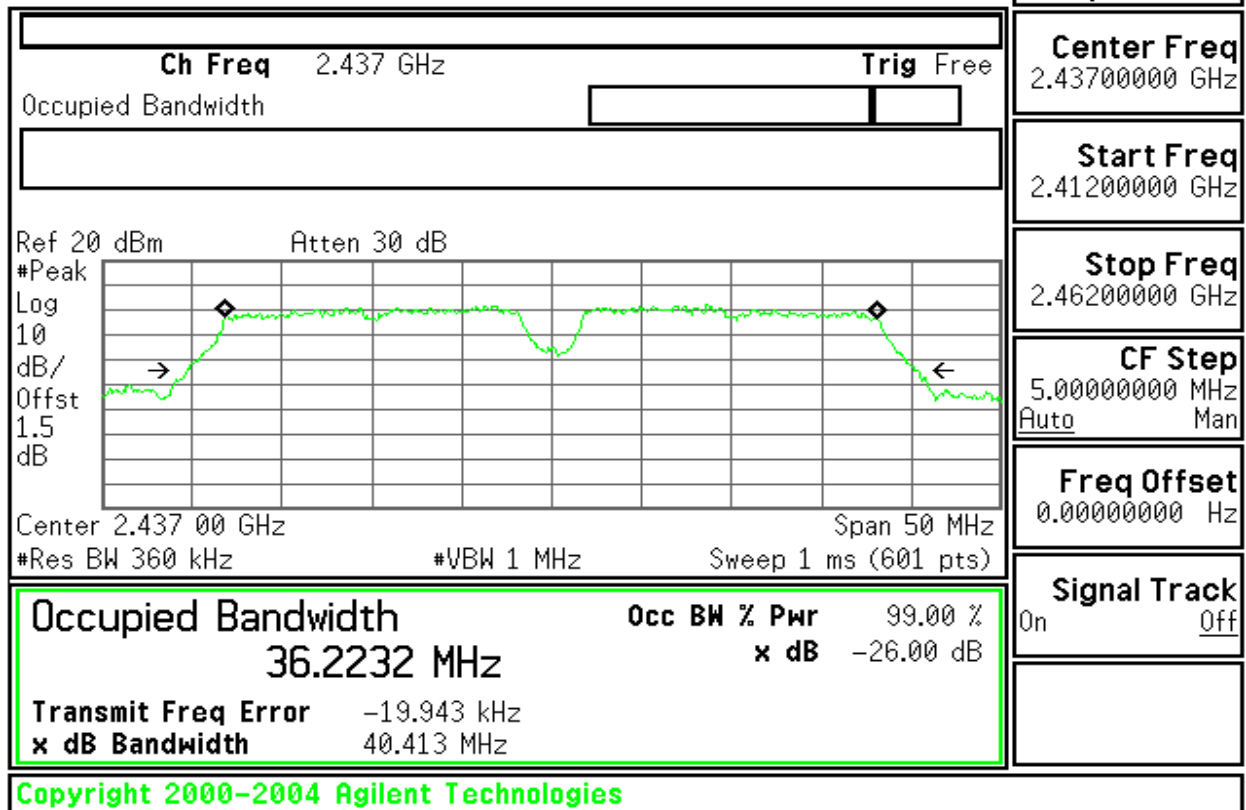

99% Bandwidth (CH High)

* Agilent 15:33:21 Aug 3, 2006

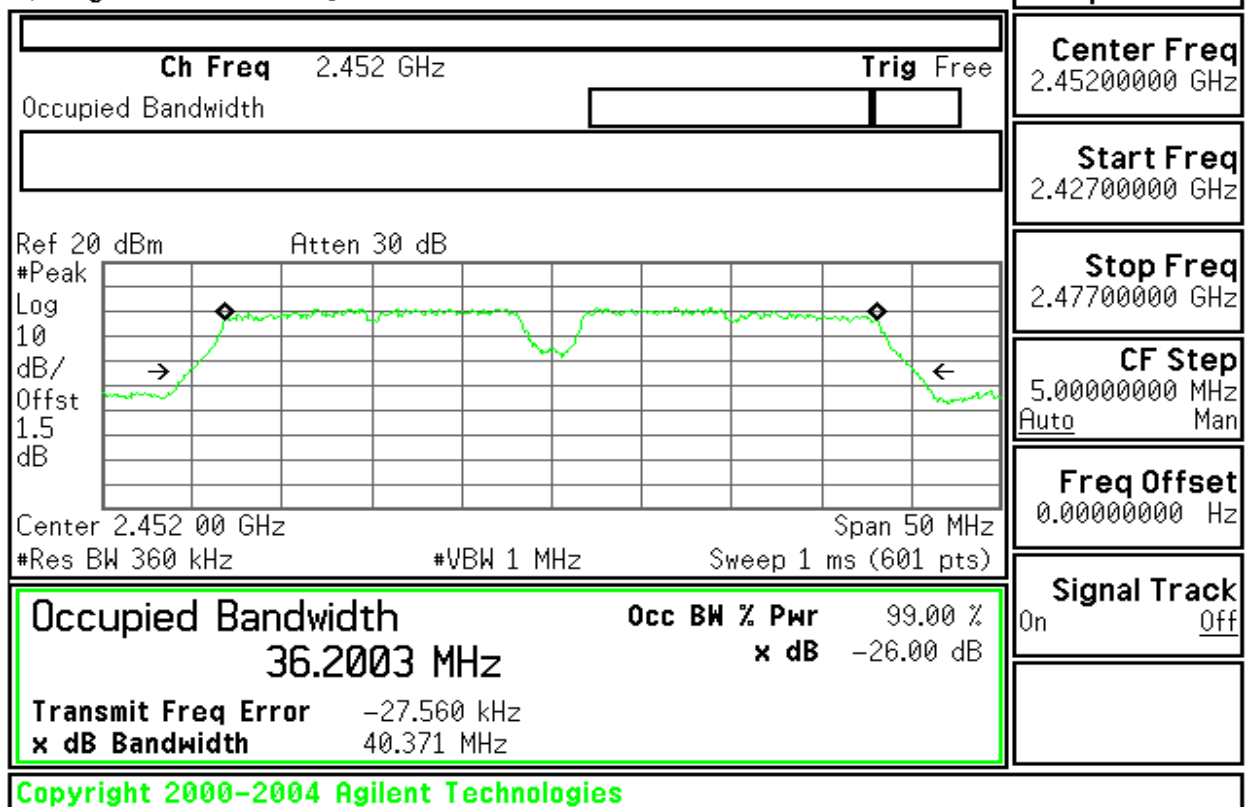




draft 802.11n Standard-20 MHz Channel mode / Chain 0


99% Bandwidth (CH Low)

* Agilent 13:44:06 Jul 22, 2006

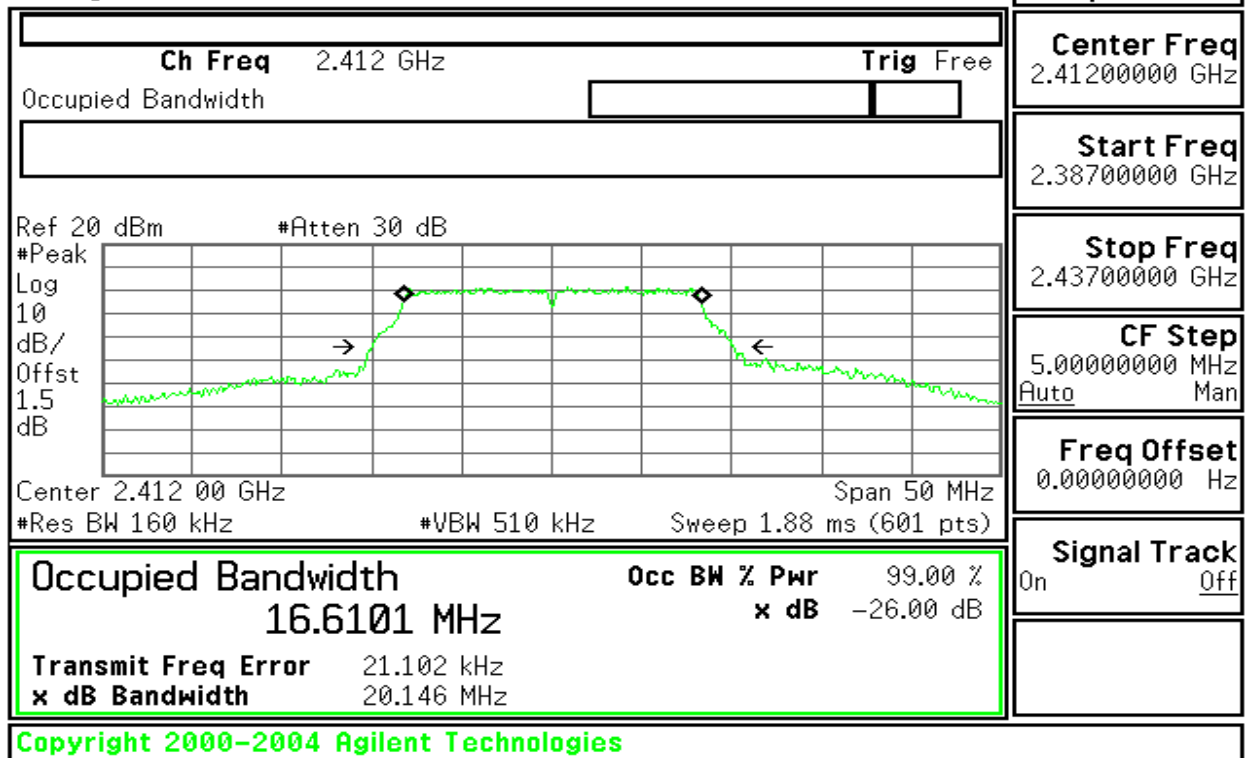

99% Bandwidth (CH Mid)


* Agilent 13:43:34 Jul 22, 2006

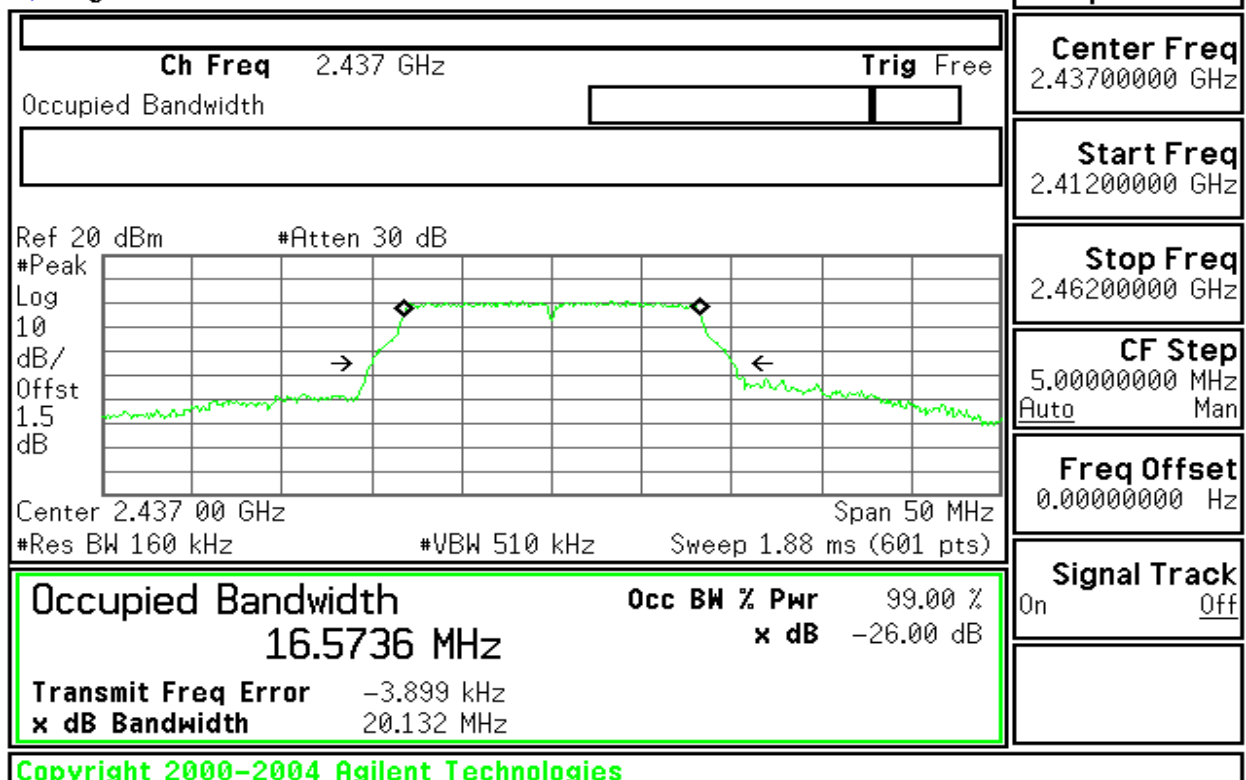

99% Bandwidth (CH High)




* Agilent 13:43:00 Jul 22, 2006

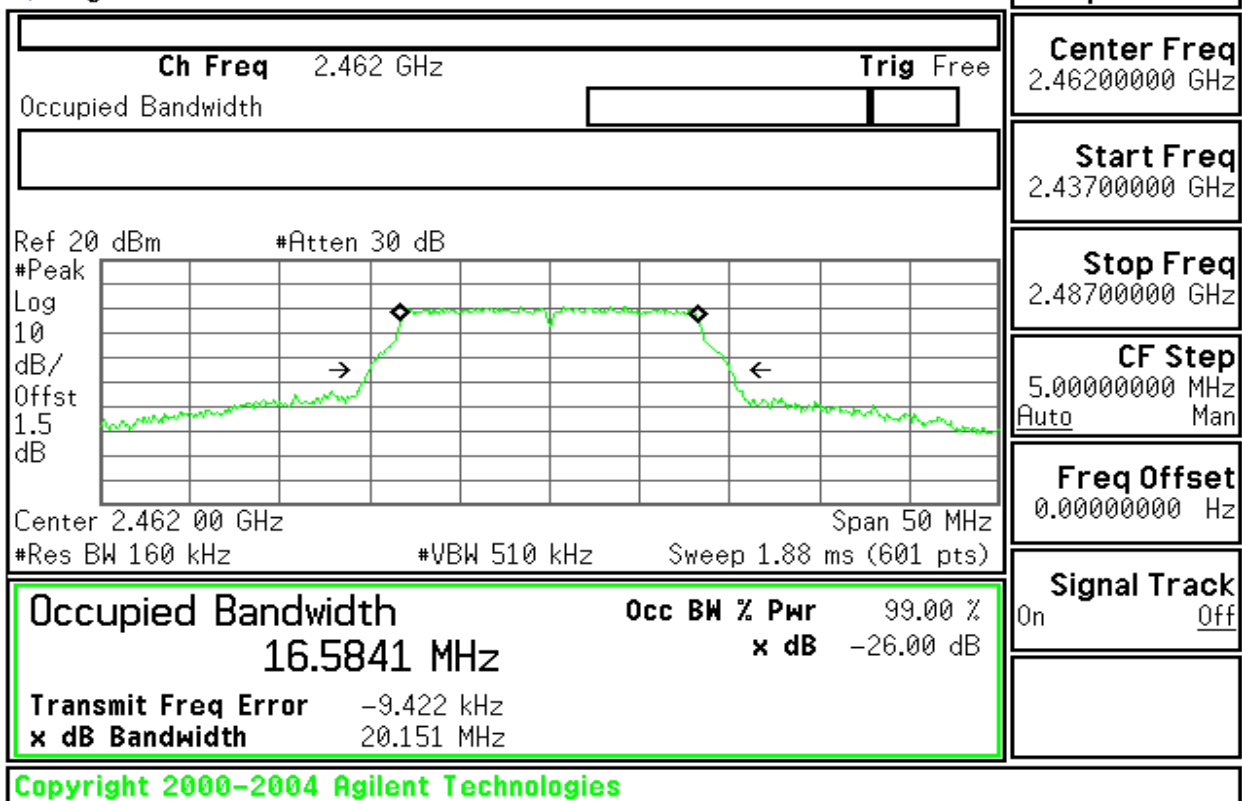

draft 802.11n Standard-20 MHz Channel mode / Chain 1

99% Bandwidth (CH Low)


* Agilent 13:41:04 Jul 22, 2006

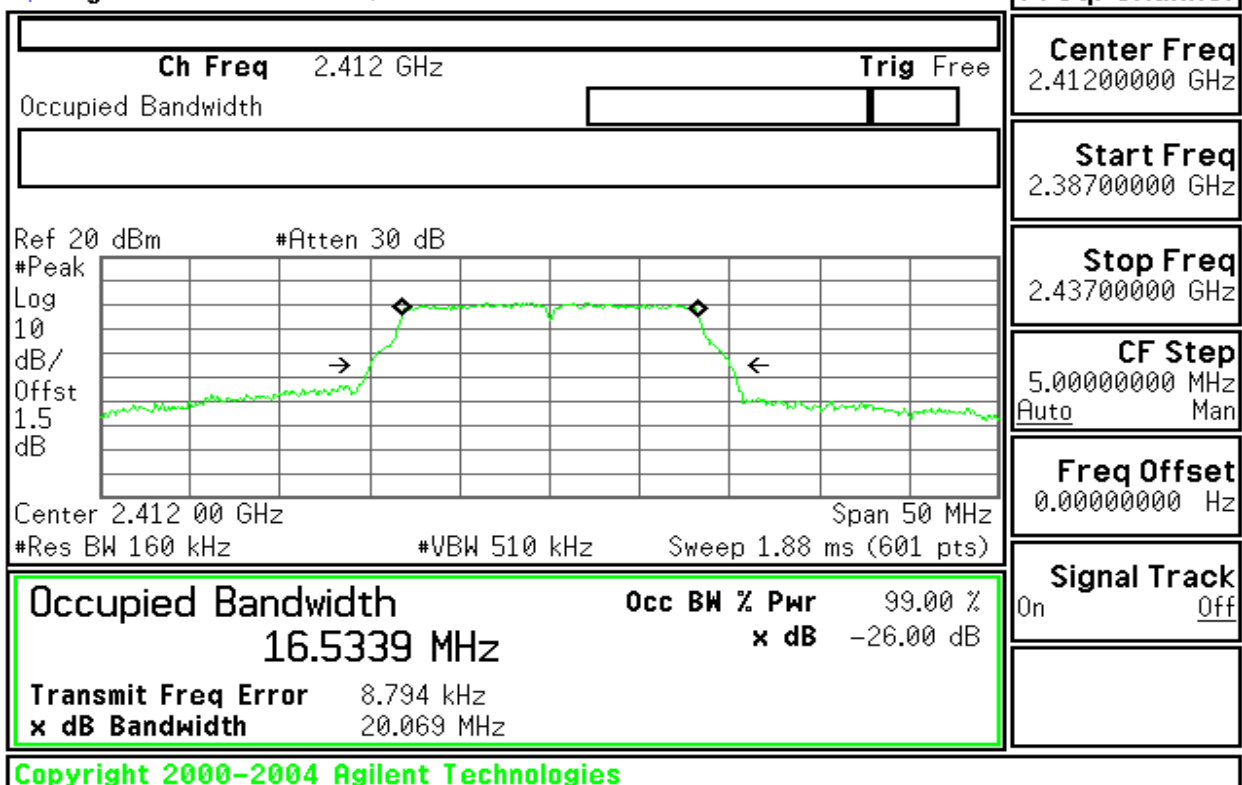

99%Bandwidth (CH Mid)




* Agilent 13:41:38 Jul 22, 2006

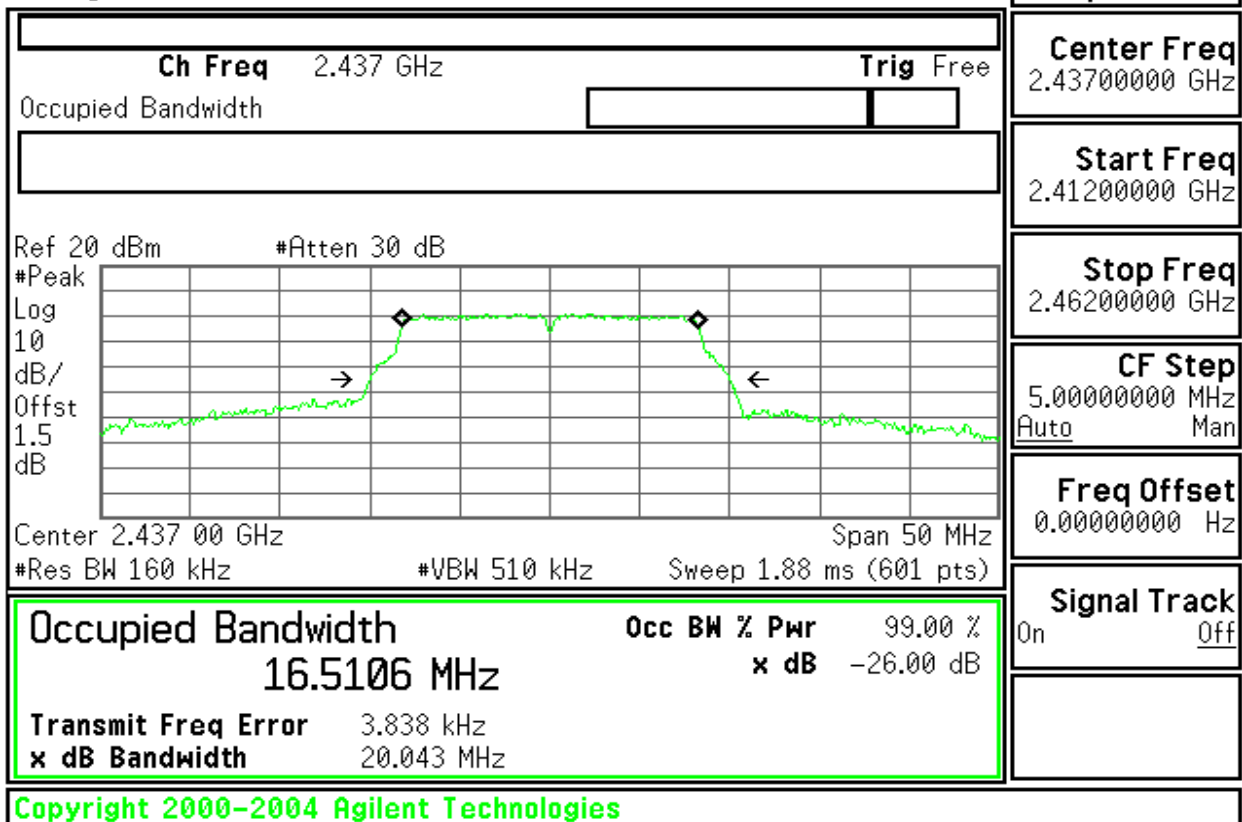

99% Bandwidth (CH High)

* Agilent 13:42:10 Jul 22, 2006

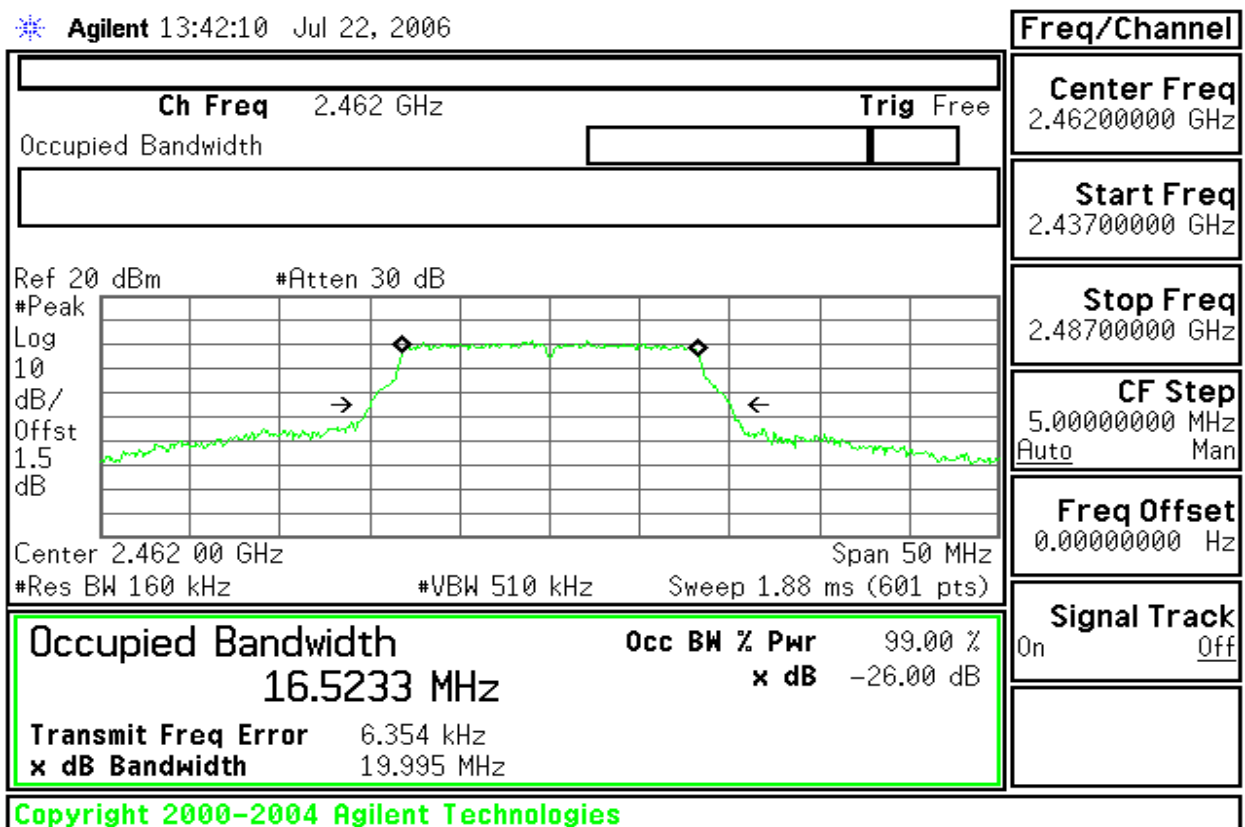




draft 802.11n Wide-40 MHz Channel mode / Chain 0


99% Bandwidth (CH Low)

* Agilent 14:26:00 Aug 2, 2006

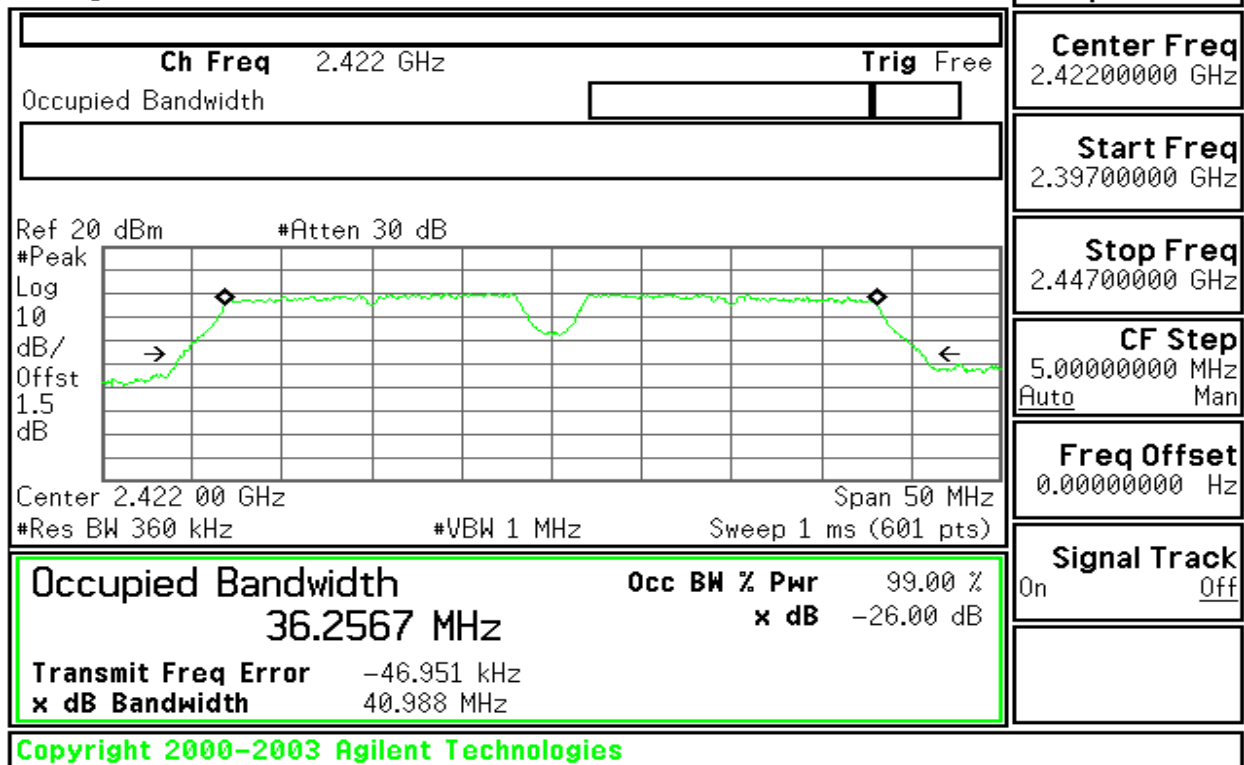

99% Bandwidth (CH Mid)


* Agilent 14:26:51 Aug 2, 2006

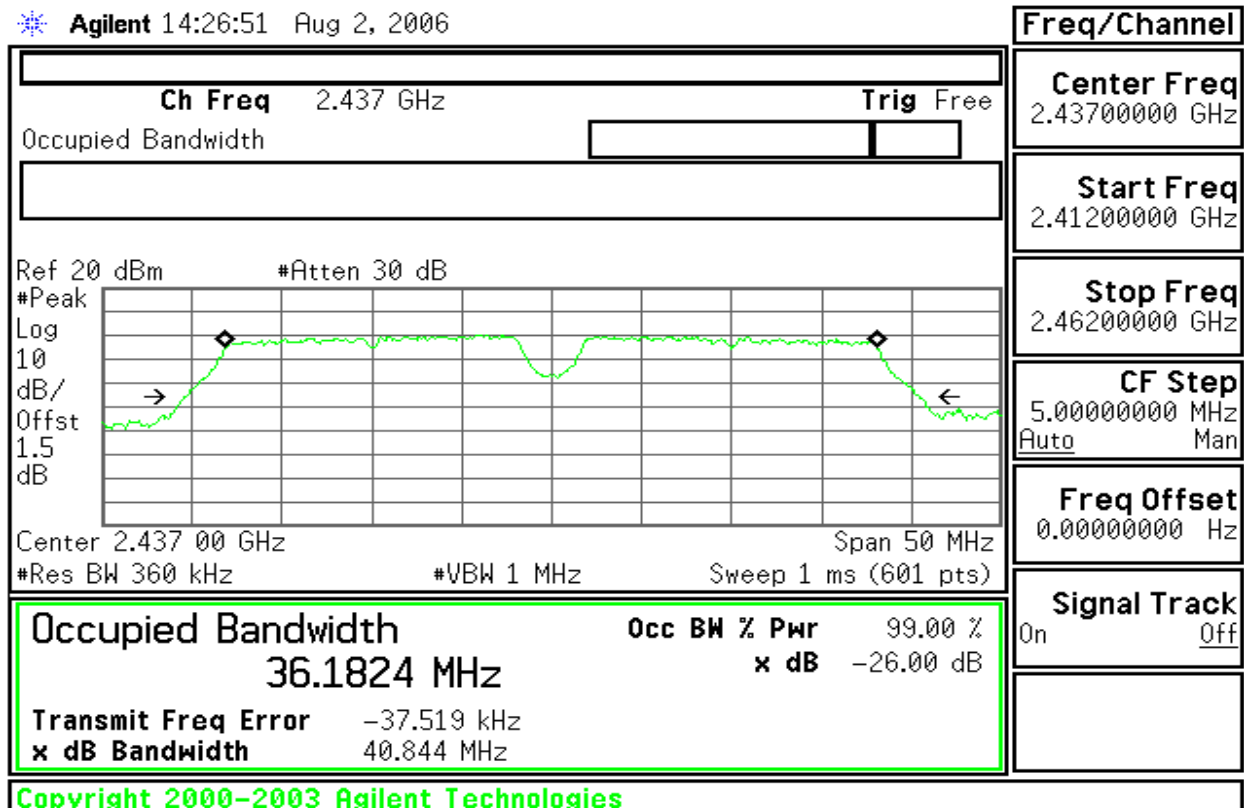



99% Bandwidth (CH High)


Agilent 14:27:33 Aug 2, 2006

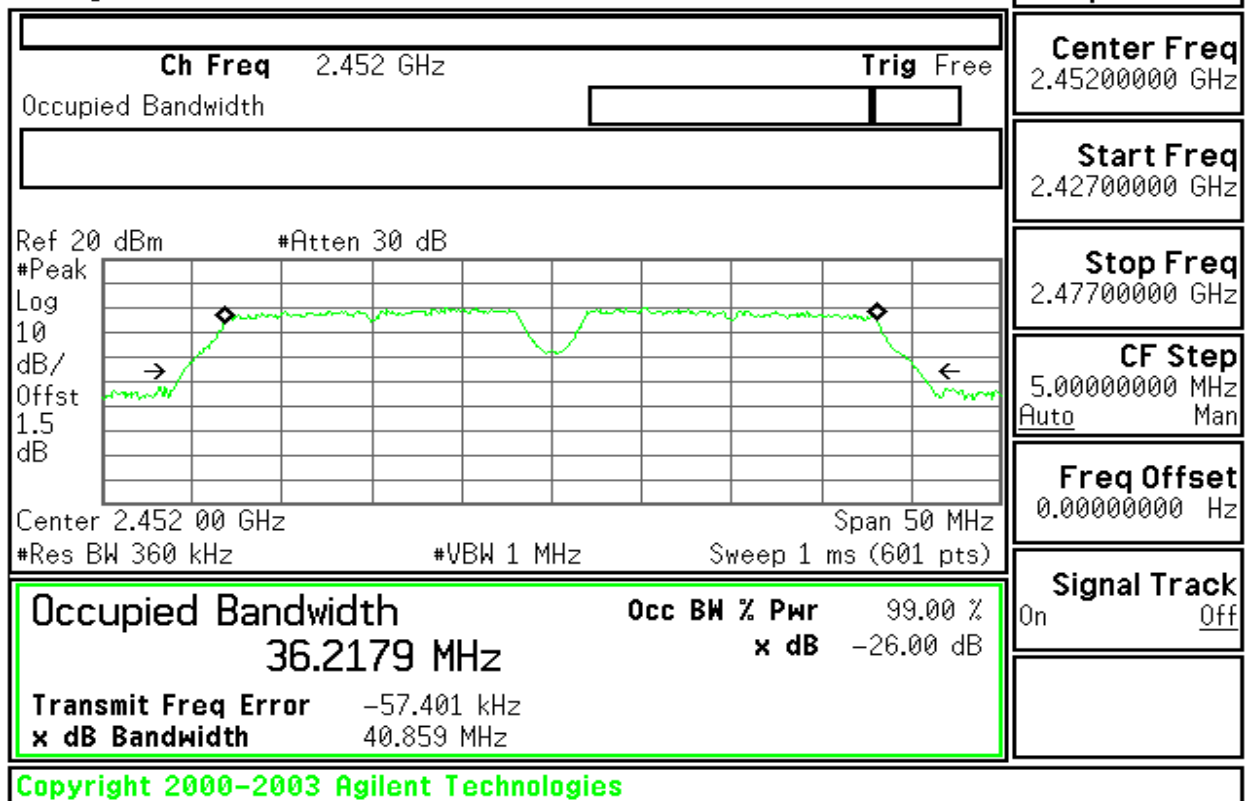

draft 802.11n Wide-40 MHz Channel mode / Chain 1

99% Bandwidth (CH Low)


Agilent 14:30:40 Aug 2, 2006

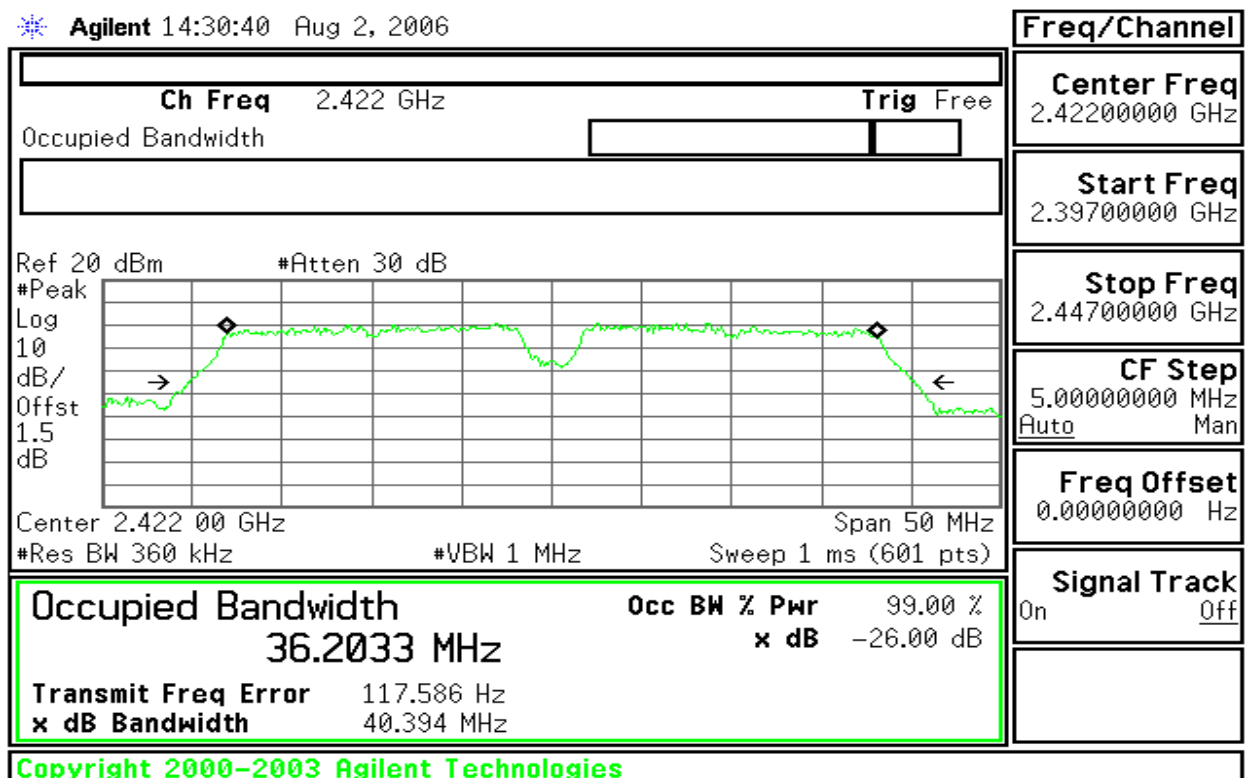




99% Bandwidth (CH Mid)

Agilent 14:30:09 Aug 2, 2006

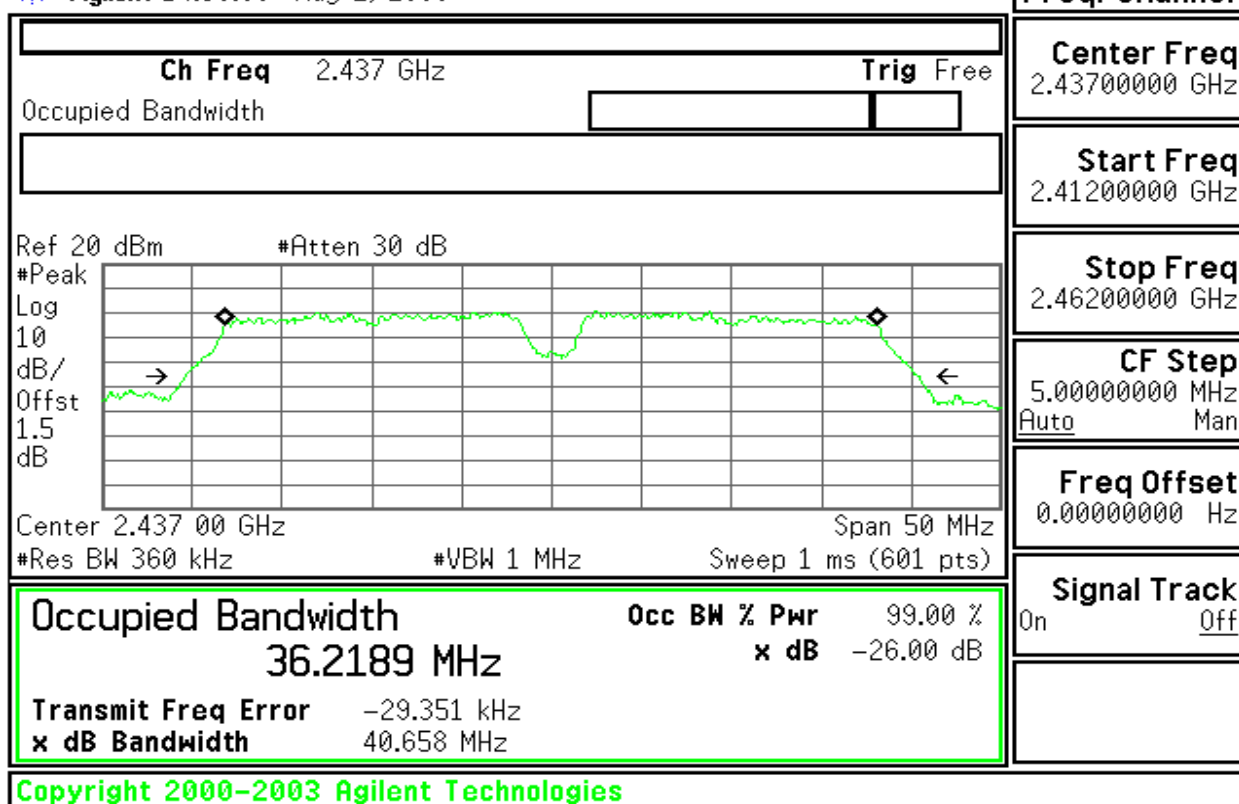

99% Bandwidth (CH High)

Agilent 14:29:33 Aug 2, 2006

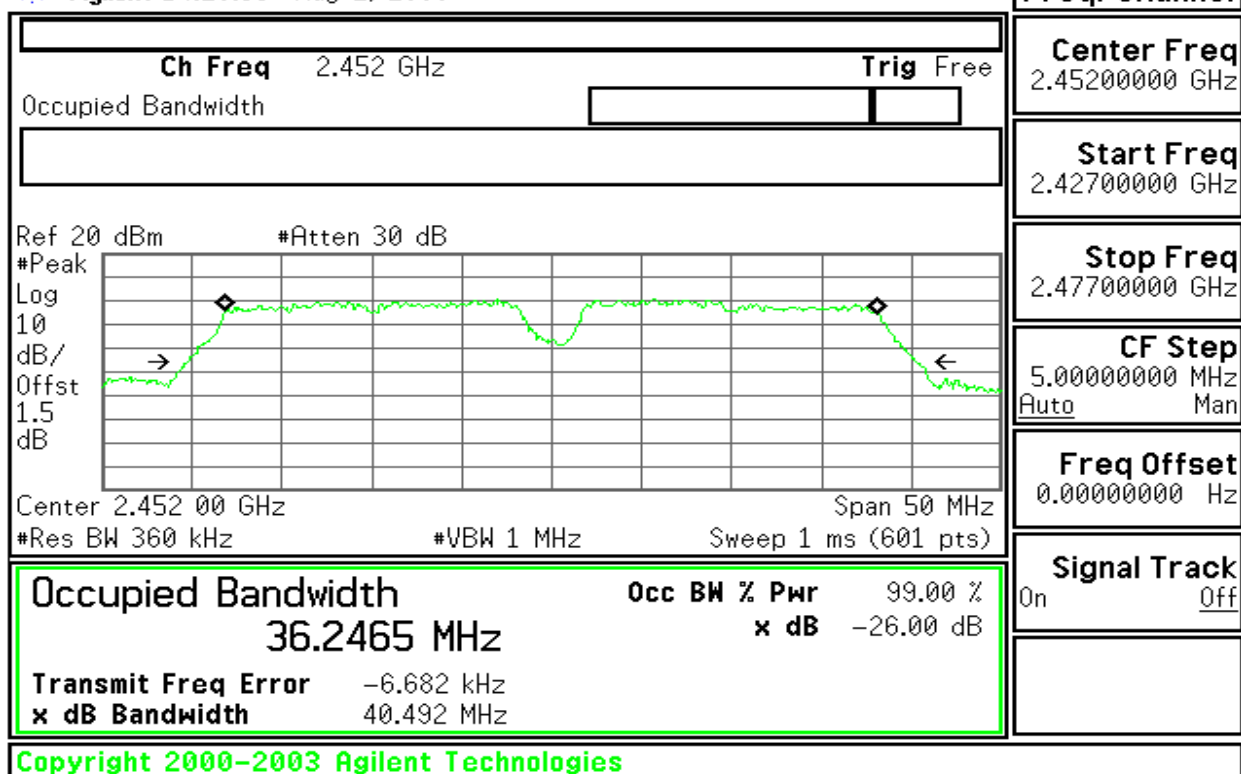




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

Output Power = $10 \log (10^{(\text{Chain 0 Output Power} / 10)} + 10^{(\text{Chain 1 Output Power} / 10)})$



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	17.15	17.28	20.23	0.1054	1.00	PASS
Mid	2437	17.27	17.30	*20.29	0.1069		PASS
High	2462	17.00	17.17	20.10	0.1023		PASS

Test mode: IEEE 802.11g 20M mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	13.26	12.60	*15.95	0.0394	1.00	PASS
Mid	2437	13.02	12.79	15.92	0.0391		PASS
High	2462	12.72	12.61	15.68	0.0370		PASS

Test mode: IEEE 802.11g 40M mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	12.33	12.46	15.41	0.0394	1.00	PASS
Mid	2437	12.47	12.70	15.60	0.0391		PASS
High	2452	12.58	12.85	*15.73	0.0370		PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode


Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	13.46	13.10	*16.29	0.0426	1.00	PASS
Mid	2437	13.14	13.17	16.17	0.0414		PASS
High	2462	13.04	13.07	16.07	0.0405		PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode


Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	12.19	12.29	15.25	0.0335	1.00	PASS
Mid	2437	12.34	12.44	15.40	0.0345		PASS
High	2452	12.50	12.48	*15.50	0.0355		PASS

**Test Plot****IEEE 802.11b mode/ Chain 0****Peak Power (CH Low)**

* Agilent 13:04:51 Jul 19, 2006

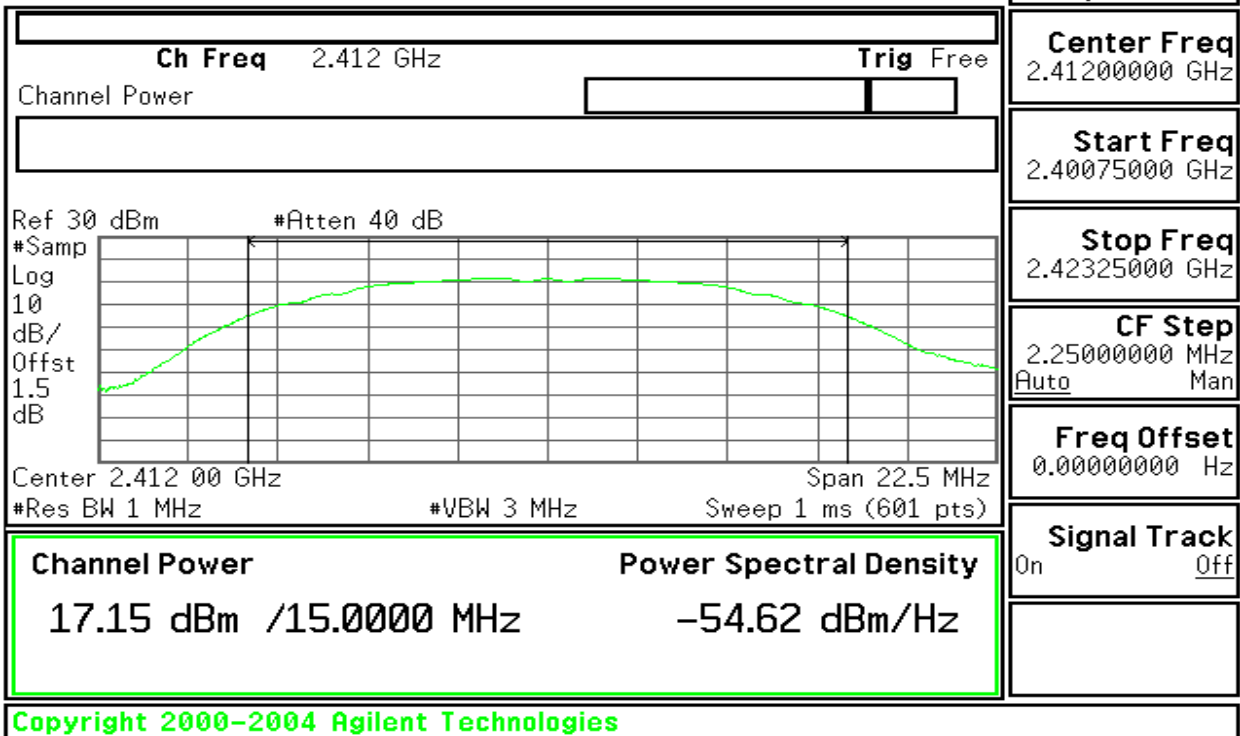
**Peak Power (CH Mid)**

* Agilent 13:06:45 Jul 19, 2006

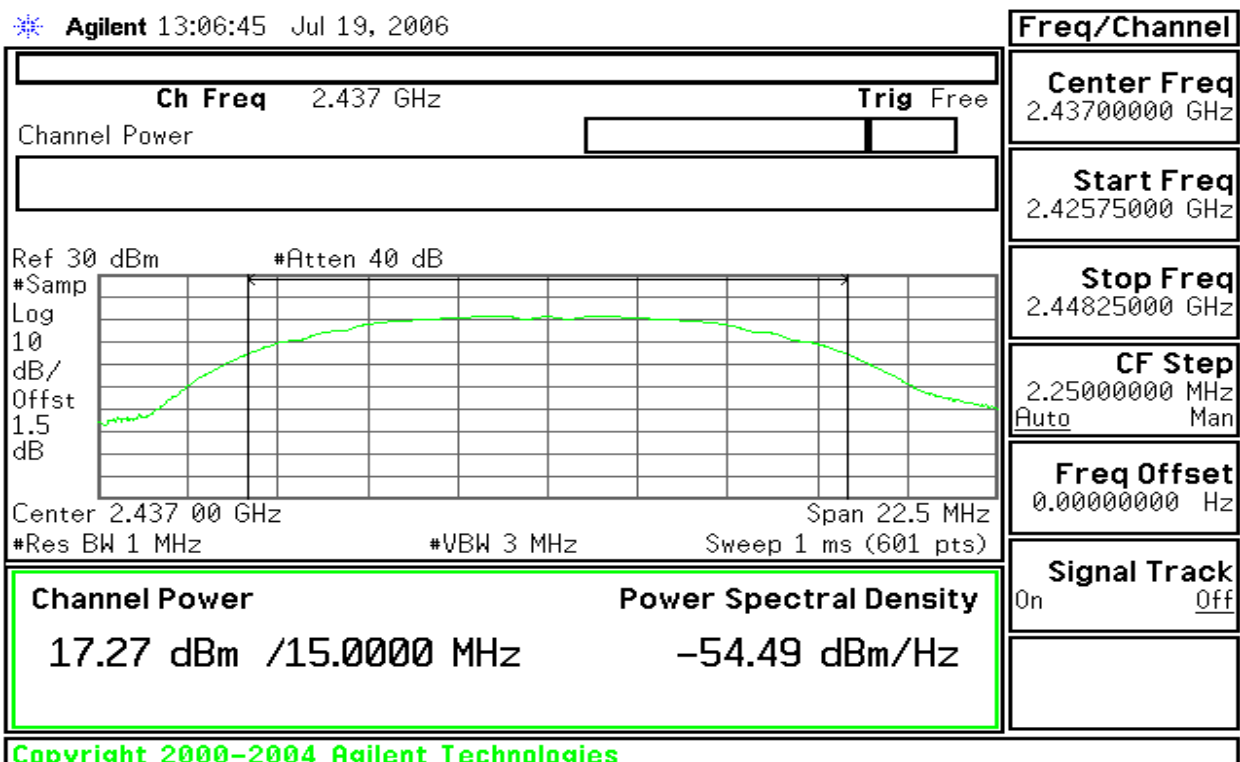


**Peak Power (CH High)**

* Agilent 13:08:25 Jul 19, 2006

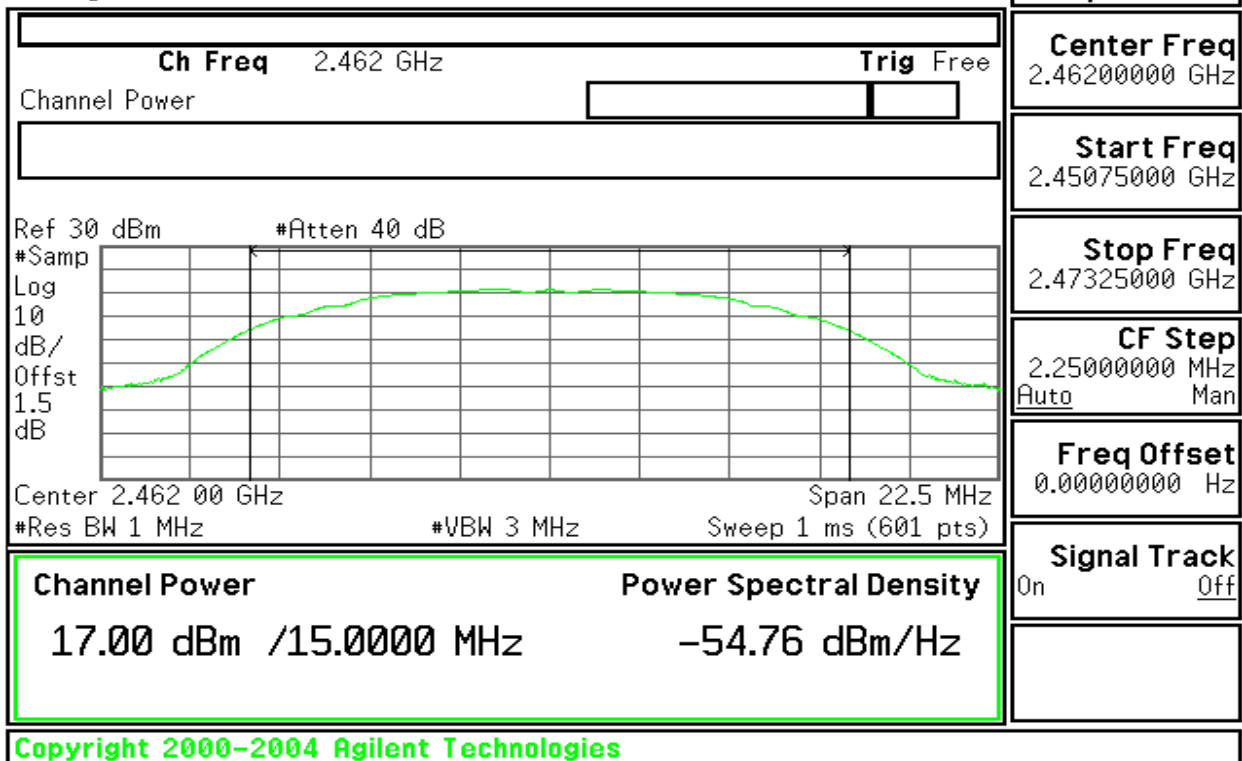**IEEE 802.11b mode/ Chain 1****Peak Power (CH Low)**


* Agilent 14:11:37 Jul 19, 2006

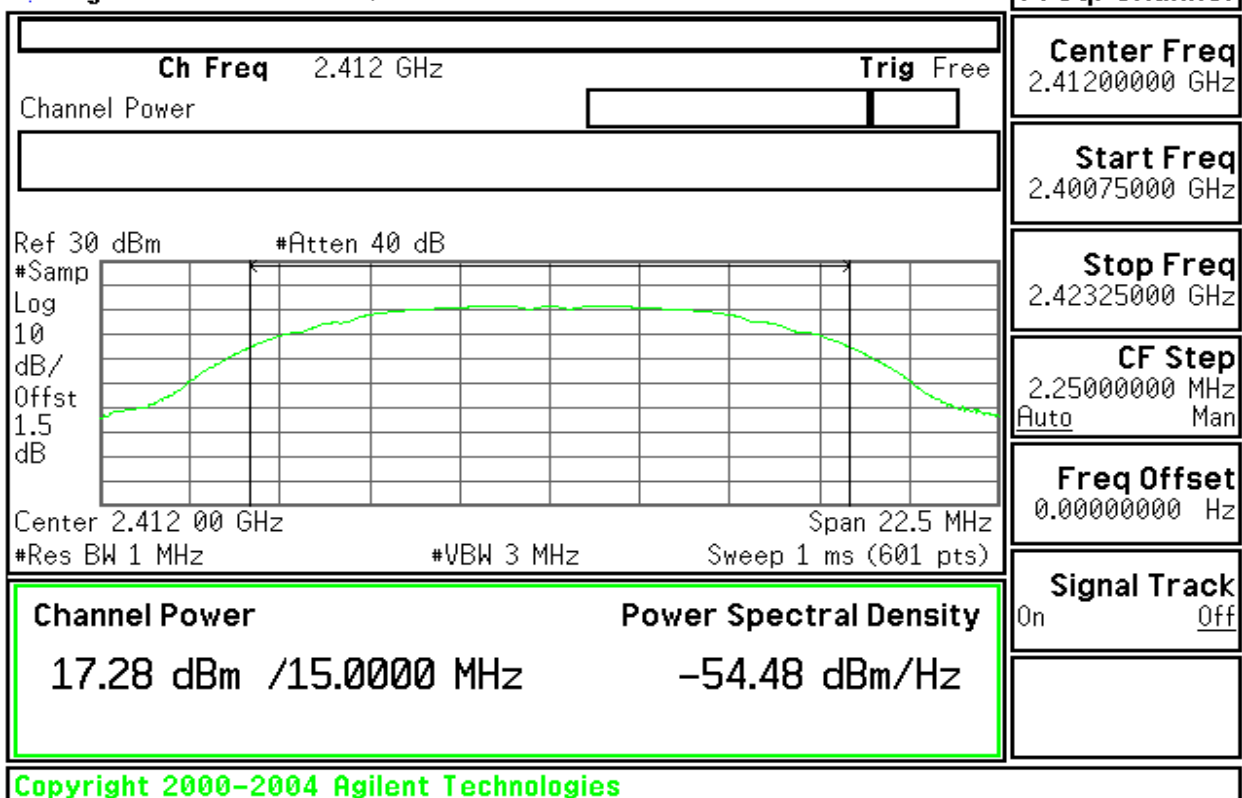




Peak Power (CH Mid)

* Agilent 14:13:27 Jul 19, 2006

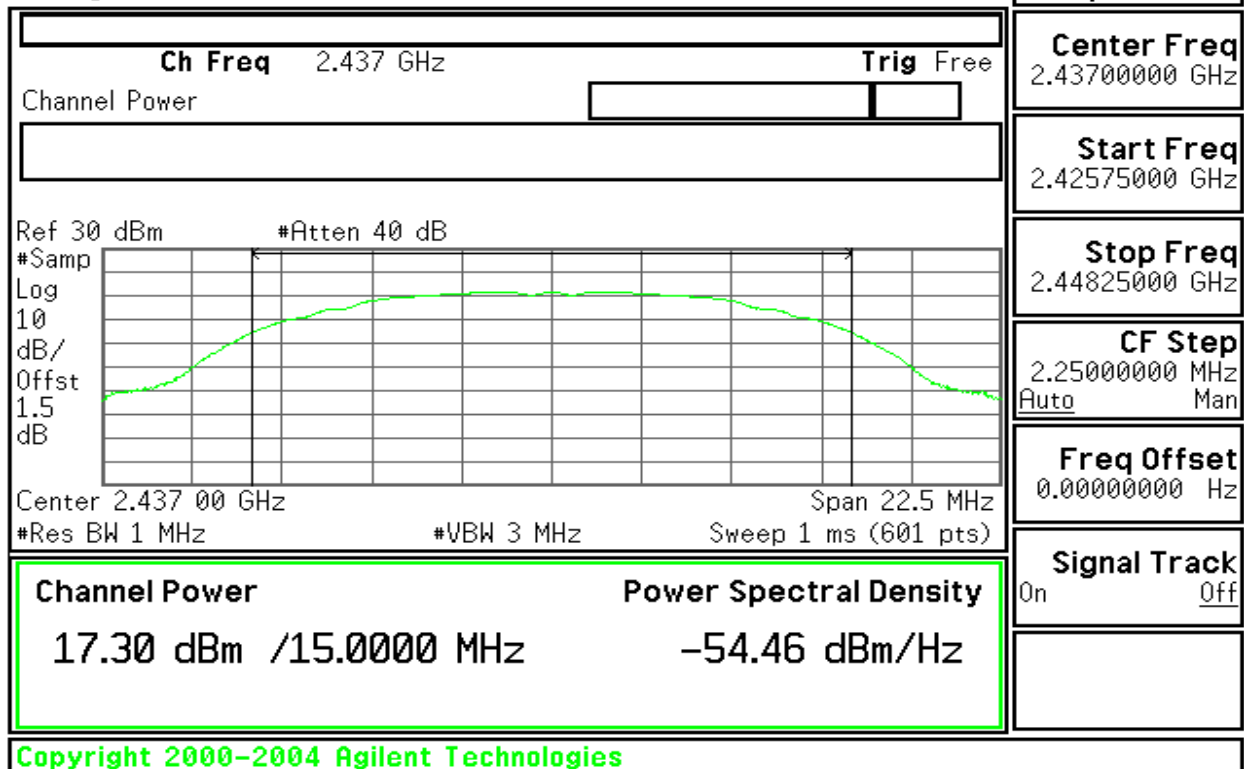


Peak Power (CH High)

* Agilent 14:14:46 Jul 19, 2006

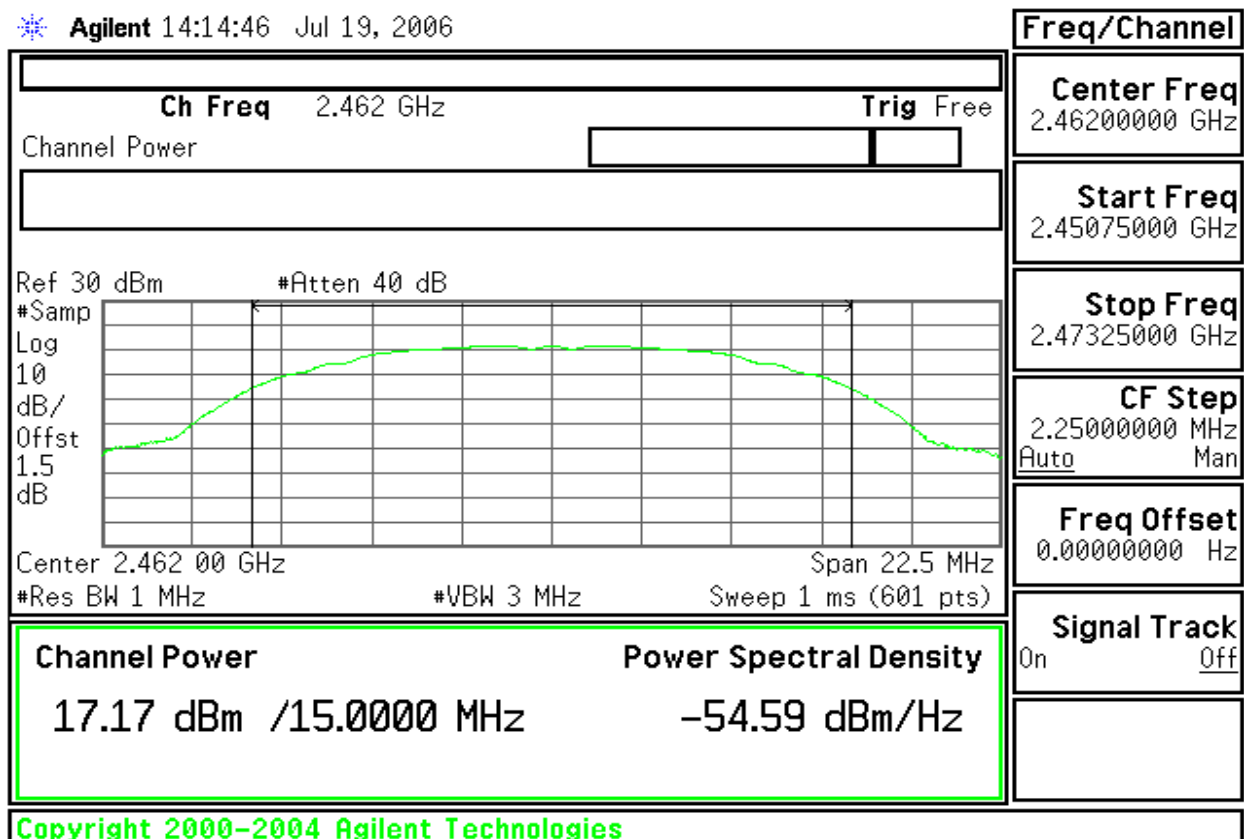


**IEEE 802.11g 20M mode/ Chain 0****Peak Power (CH Low)**

* Agilent 15:19:43 Jul 20, 2006

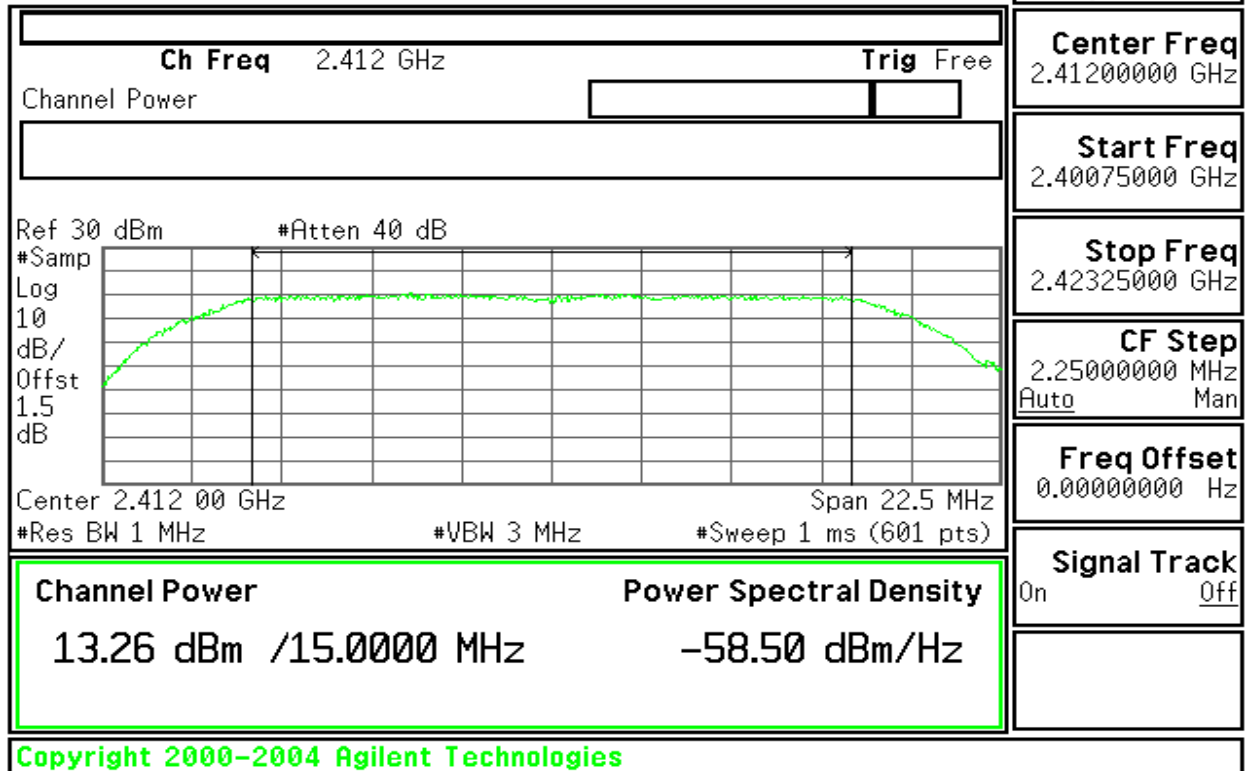**Peak Power (CH Mid)**


* Agilent 15:20:50 Jul 20, 2006

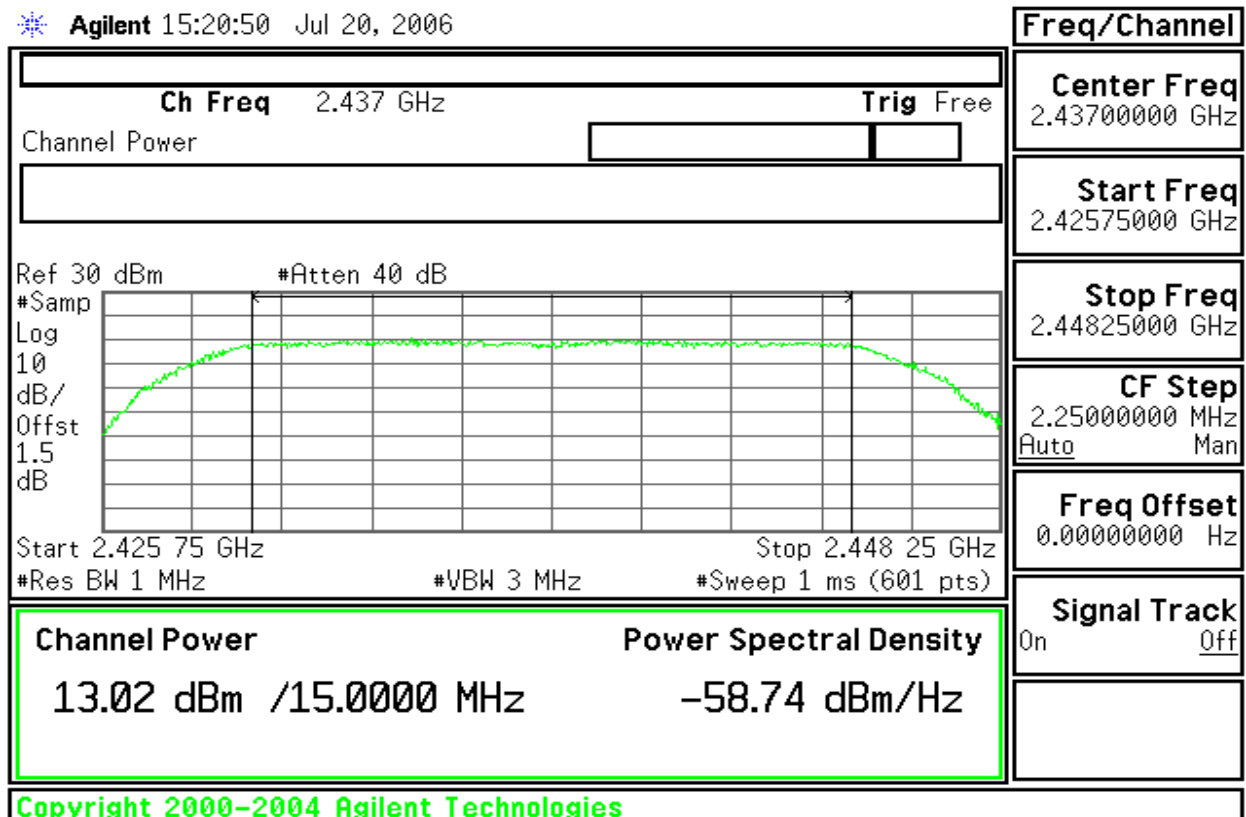



Peak Power (CH High)


* Agilent 15:24:32 Jul 20, 2006

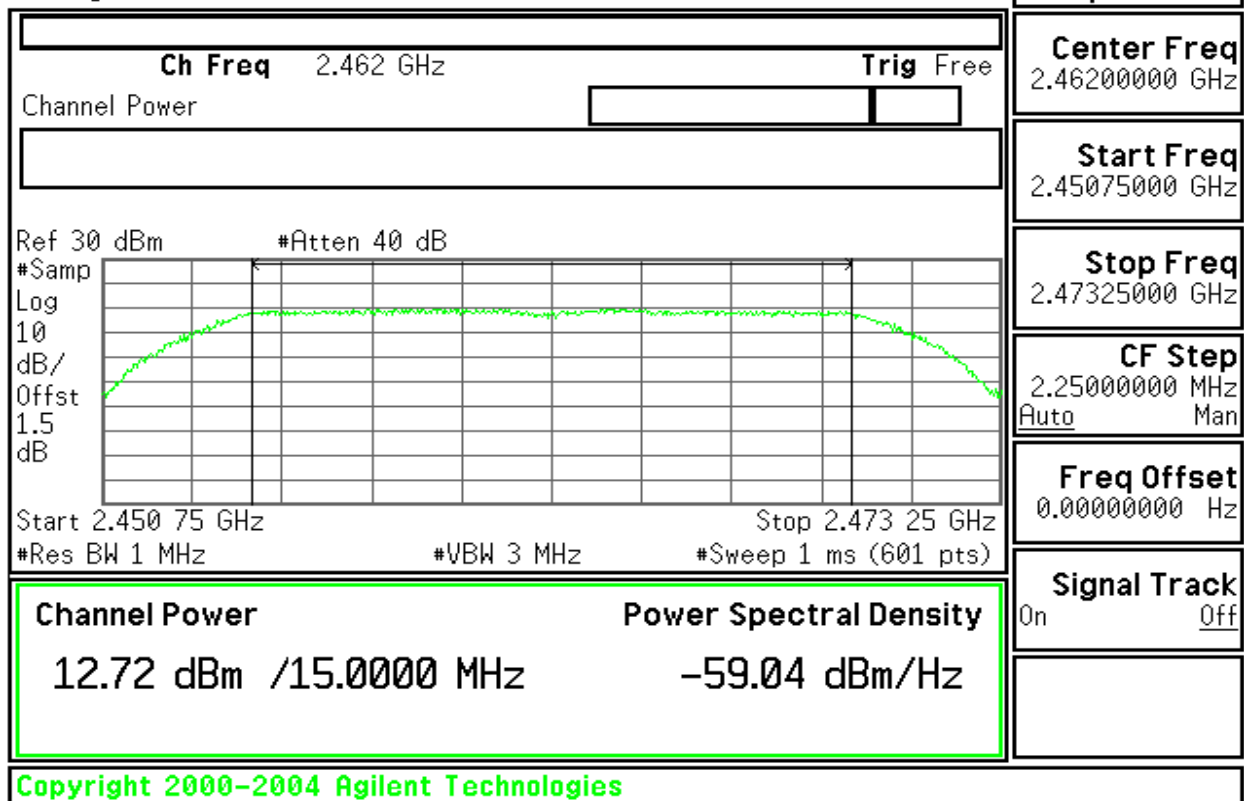

IEEE 802.11g 20M mode/ Chain 1

Peak Power (CH Low)


* Agilent 15:32:47 Jul 20, 2006

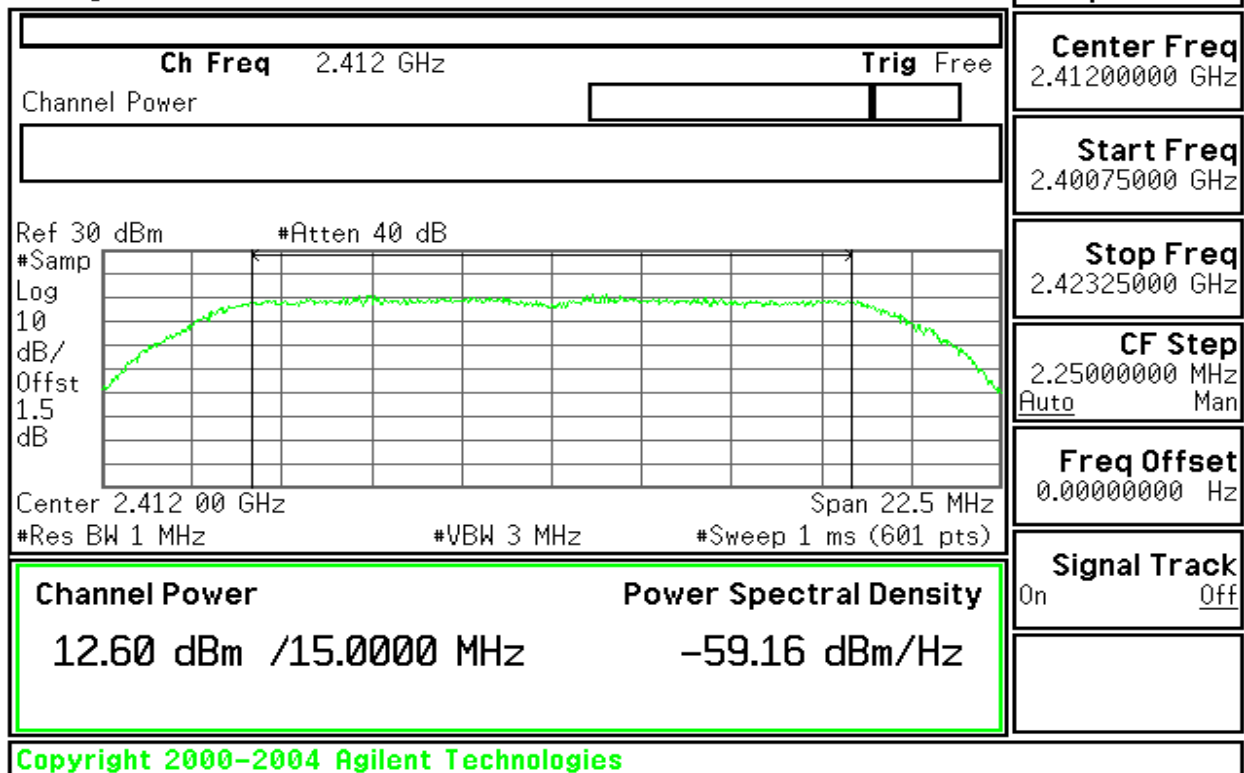




Peak Power (CH Mid)

* Agilent 15:30:40 Jul 20, 2006

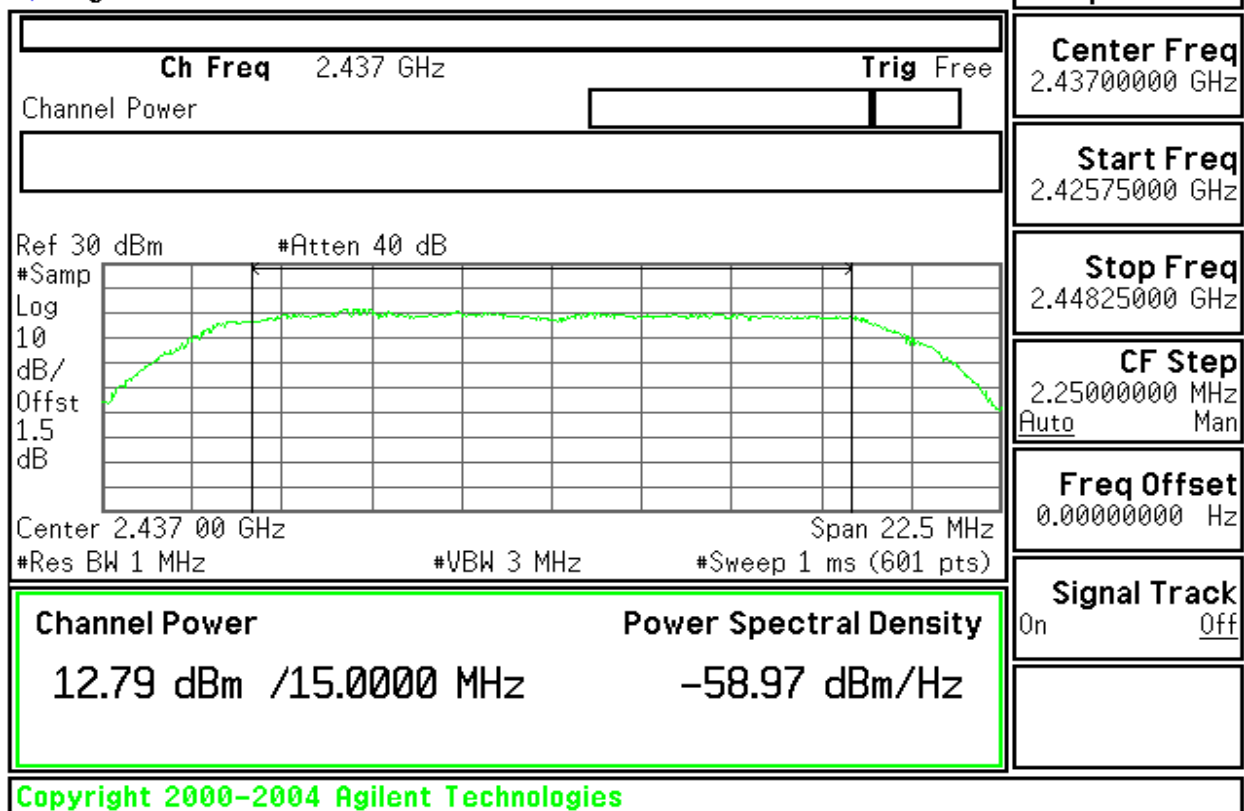


Peak Power (CH High)

* Agilent 15:28:52 Jul 20, 2006

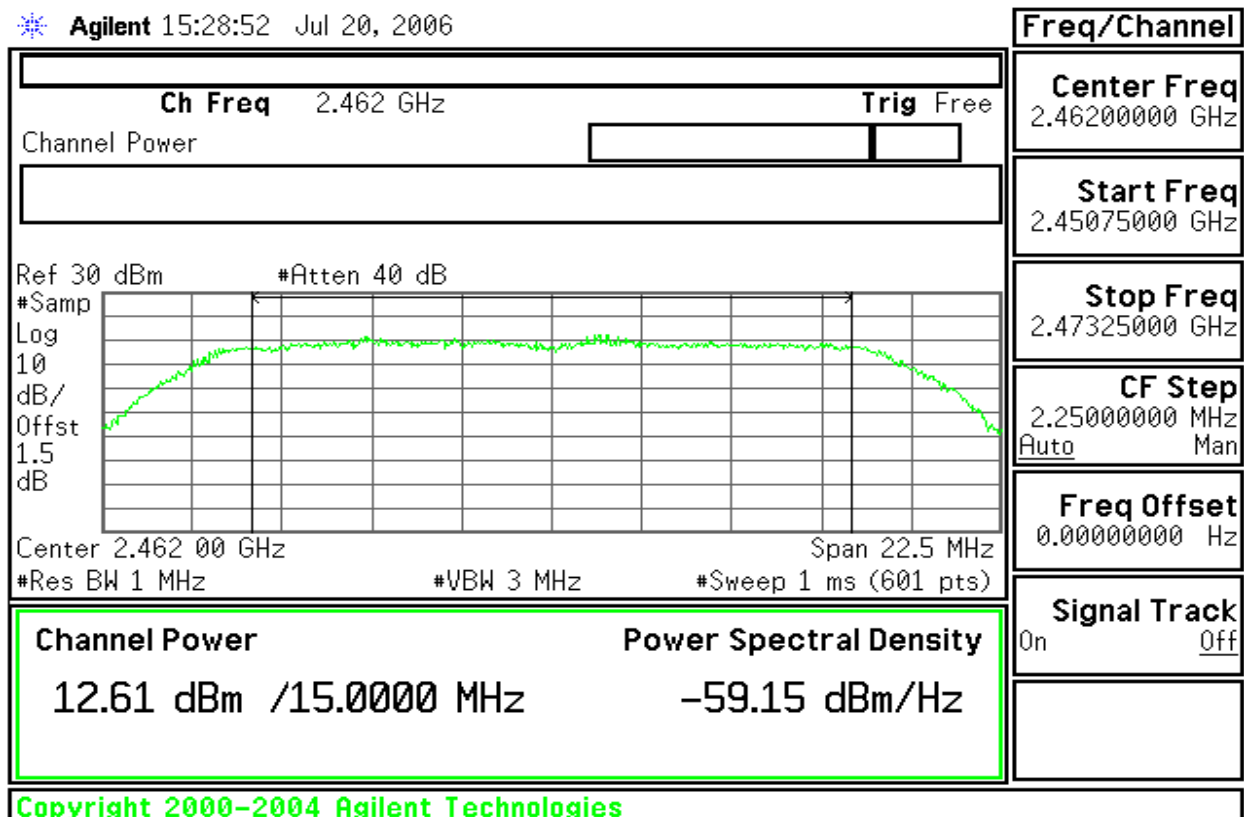


**IEEE 802.11g 40M mode/ Chain 0****Peak Power (CH Low)**

* Agilent 15:50:48 Aug 3, 2006

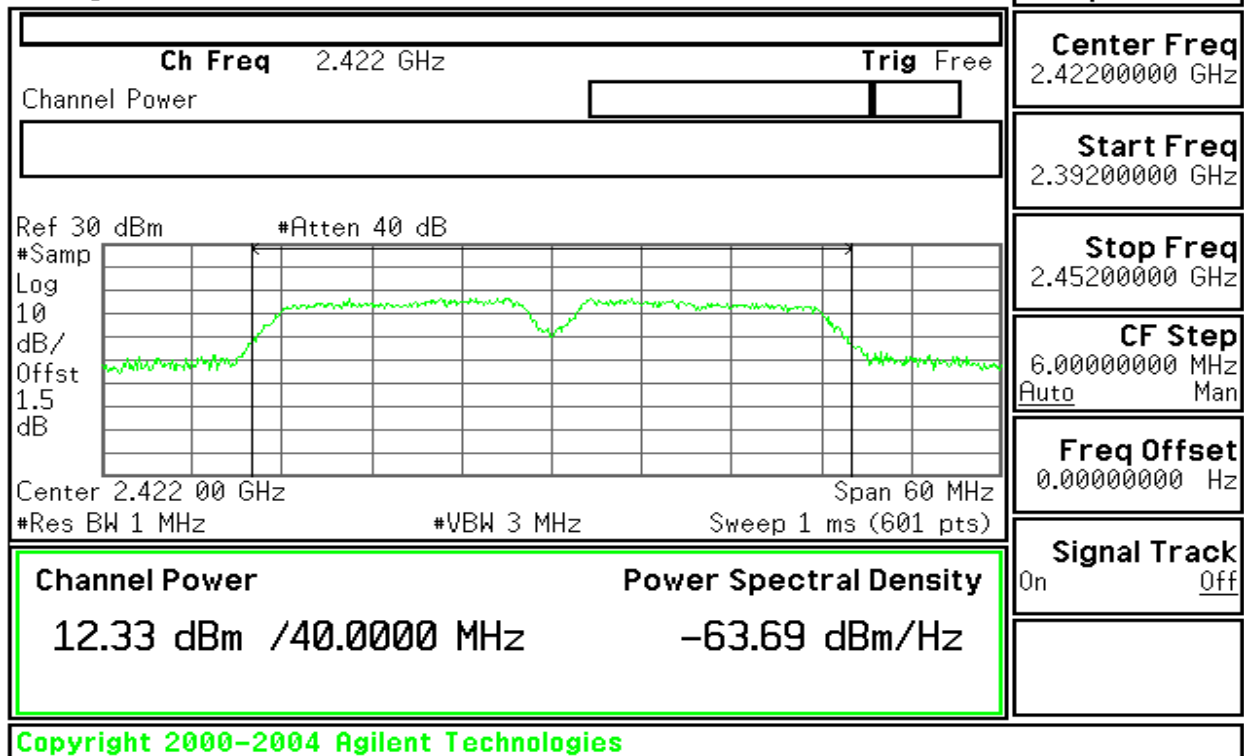**Peak Power (CH Mid)**


* Agilent 15:50:06 Aug 3, 2006

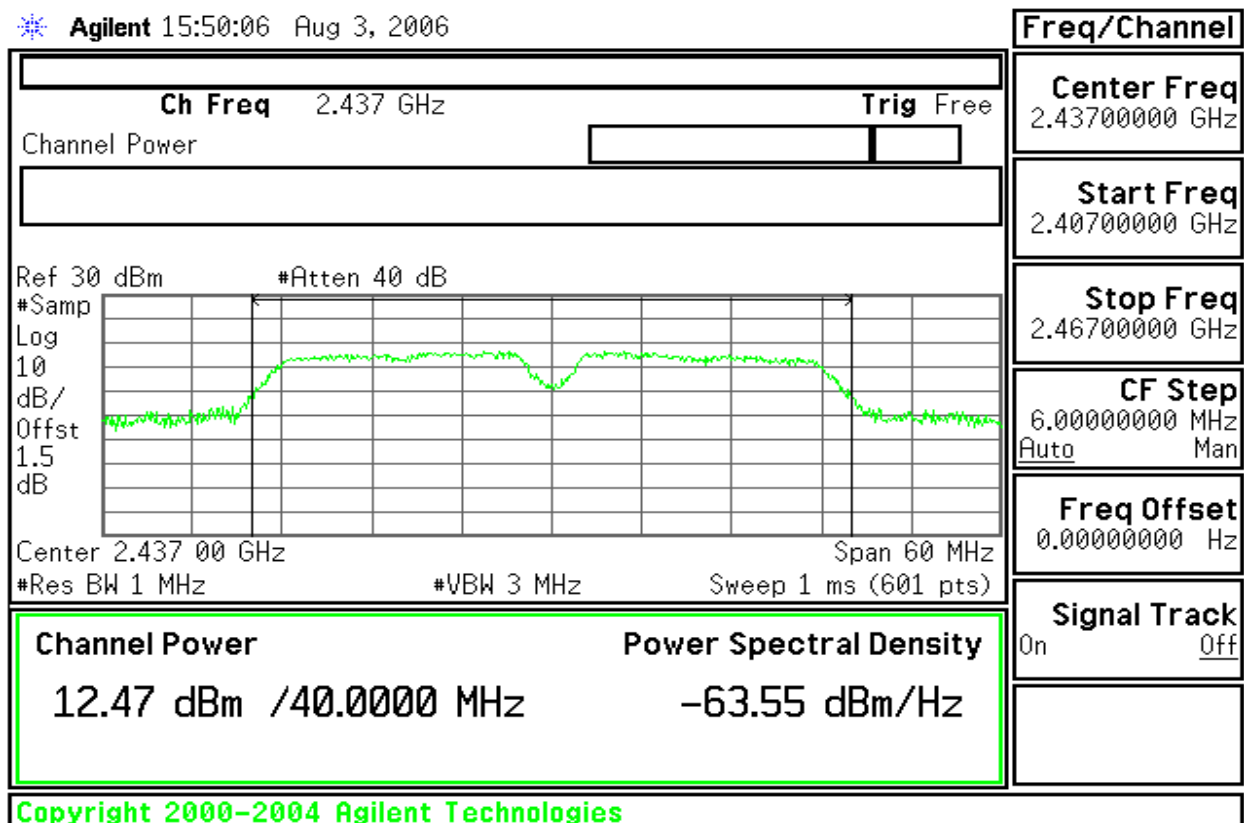



Peak Power (CH High)


* Agilent 15:49:18 Aug 3, 2006

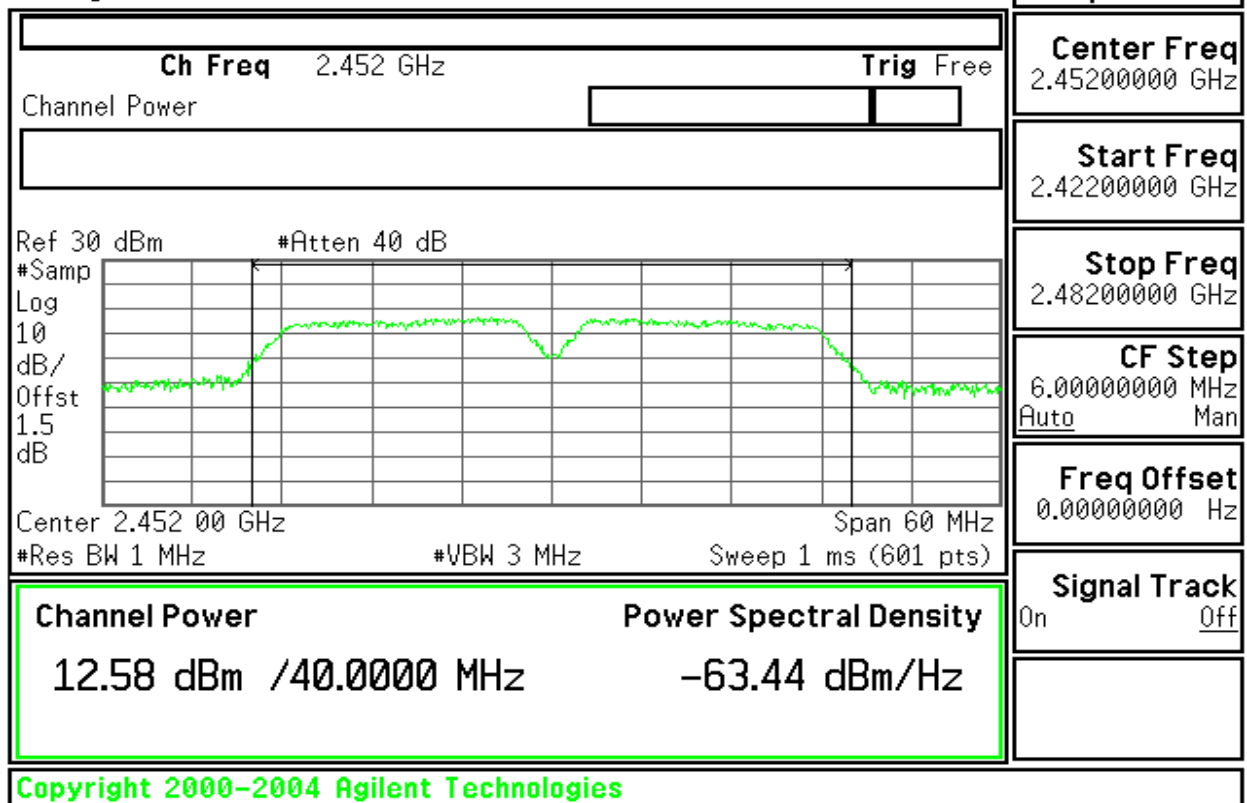

IEEE 802.11g 40M mode/ Chain 1

Peak Power (CH Low)


* Agilent 15:45:15 Aug 3, 2006

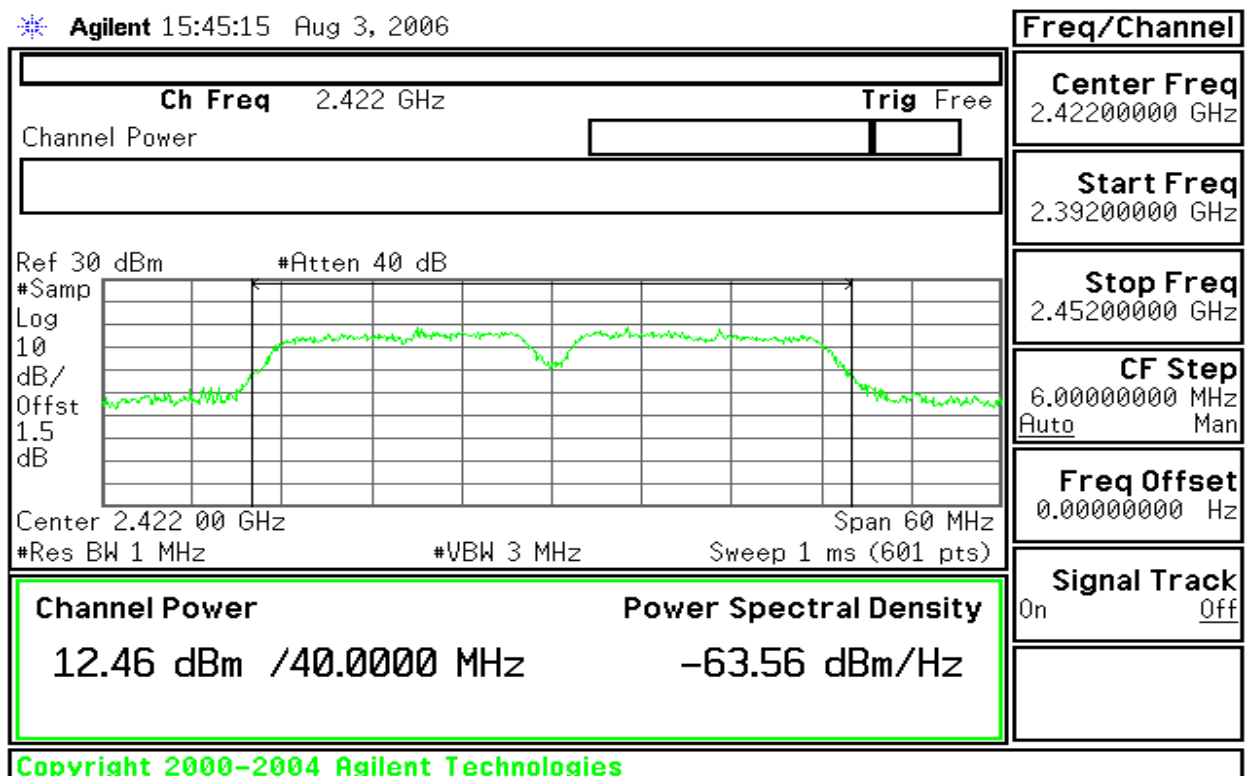




Peak Power (CH Mid)

* Agilent 15:46:18 Aug 3, 2006

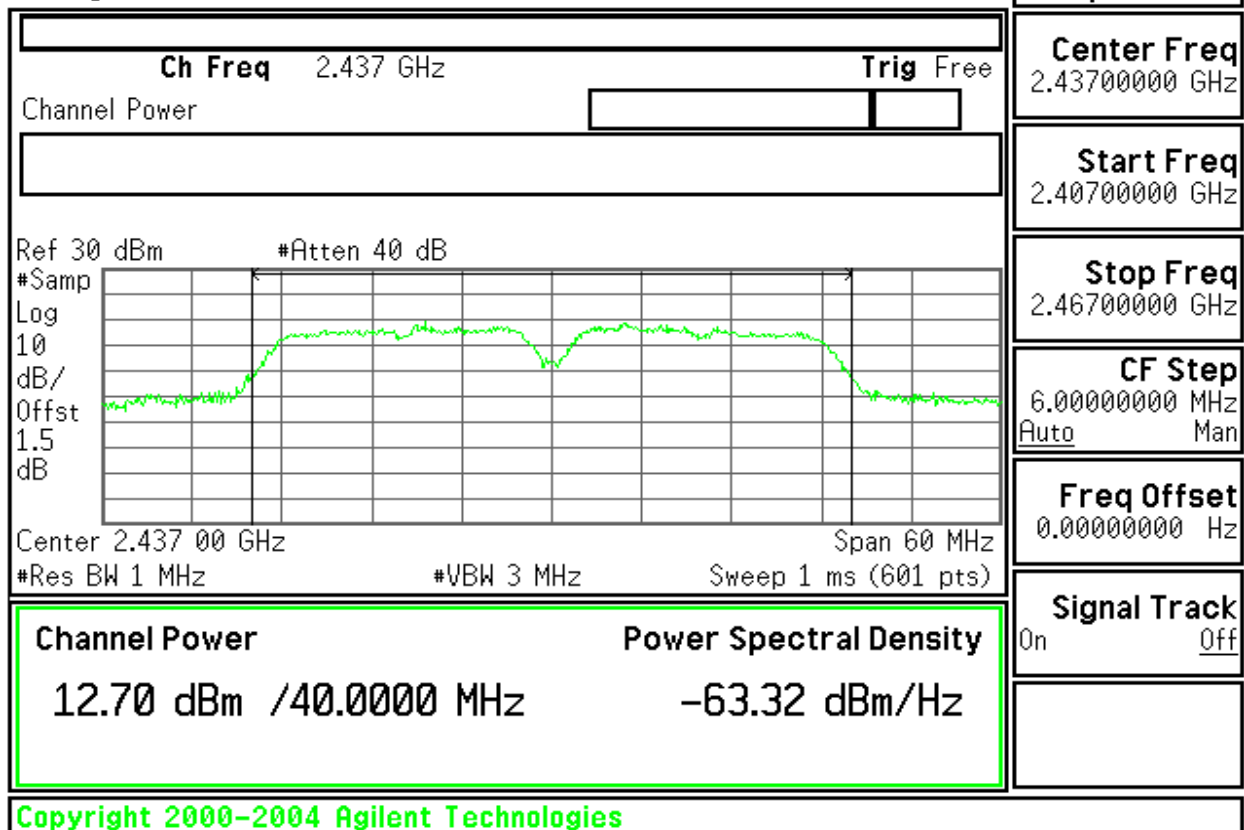

Peak Power (CH High)

* Agilent 15:47:57 Aug 3, 2006

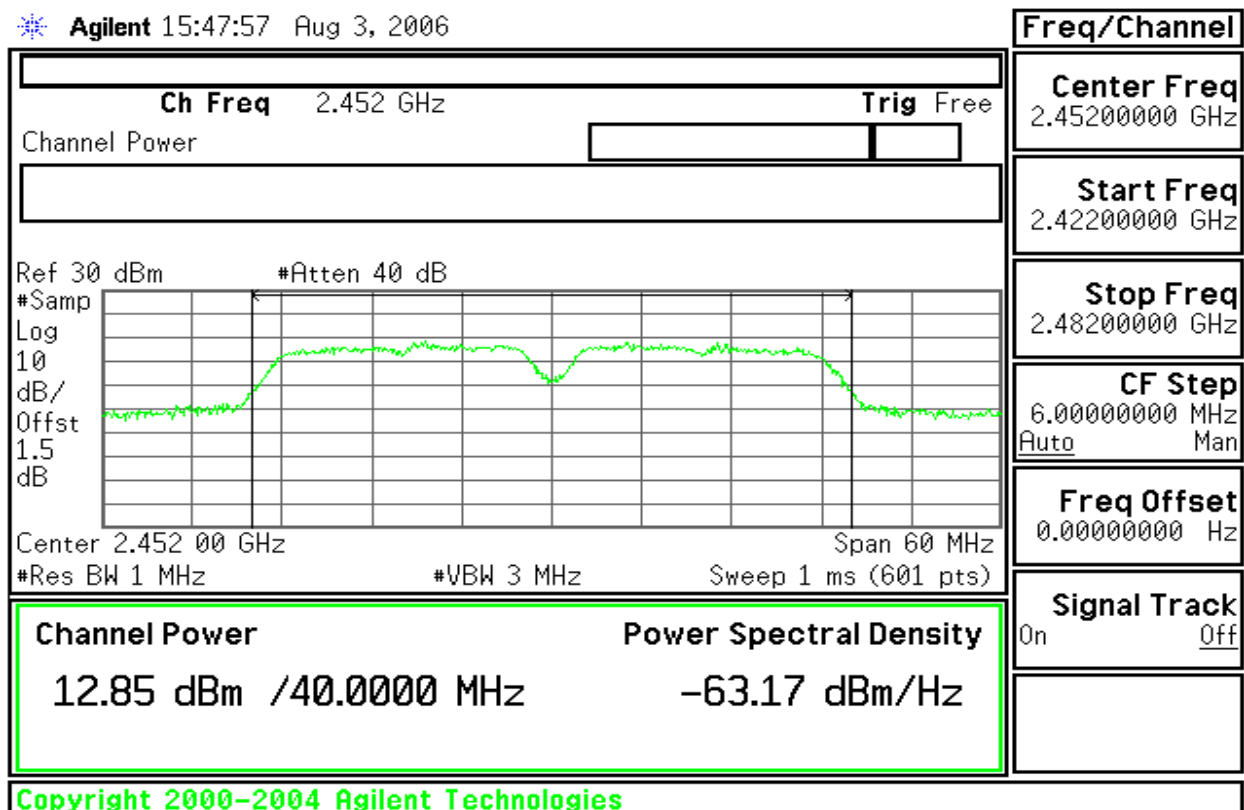




draft 802.11n Standard-20 MHz Channel mode / Chain 0


Peak Power (CH Low)

* Agilent 13:10:41 Jul 22, 2006

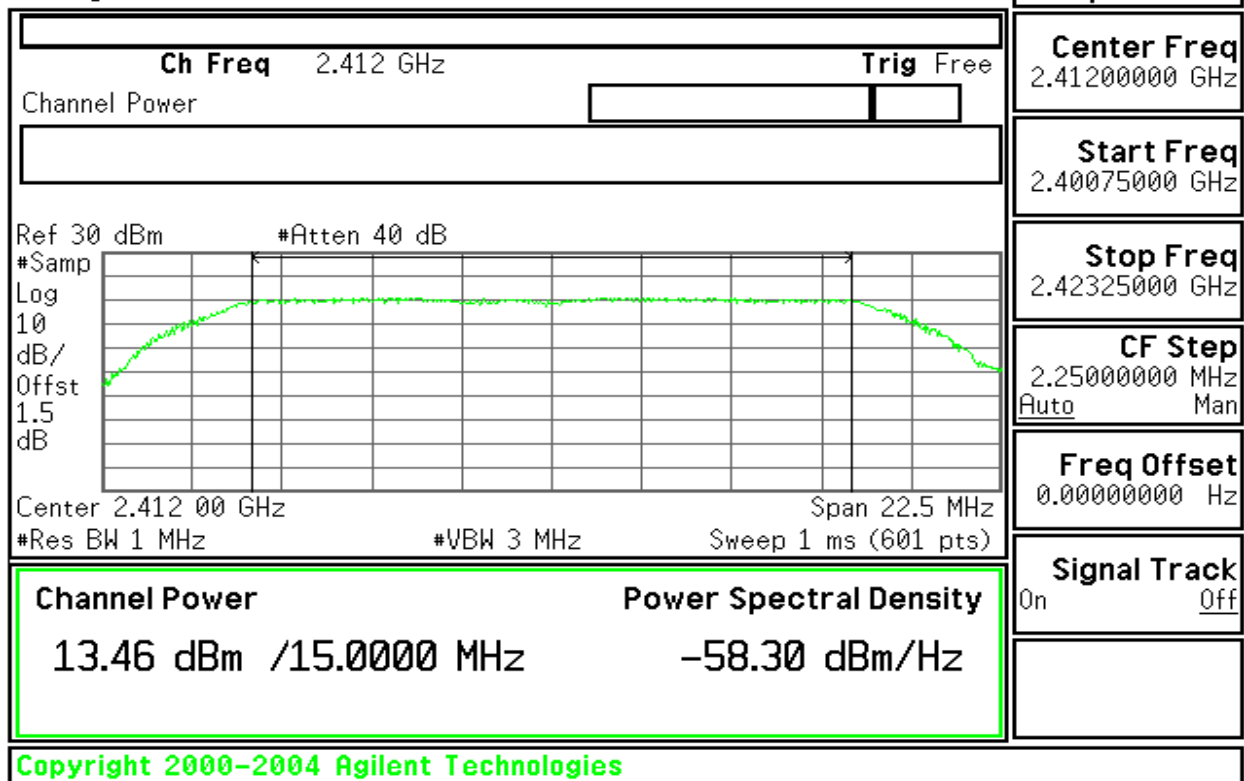

Peak Power (CH Mid)


* Agilent 13:12:09 Jul 22, 2006

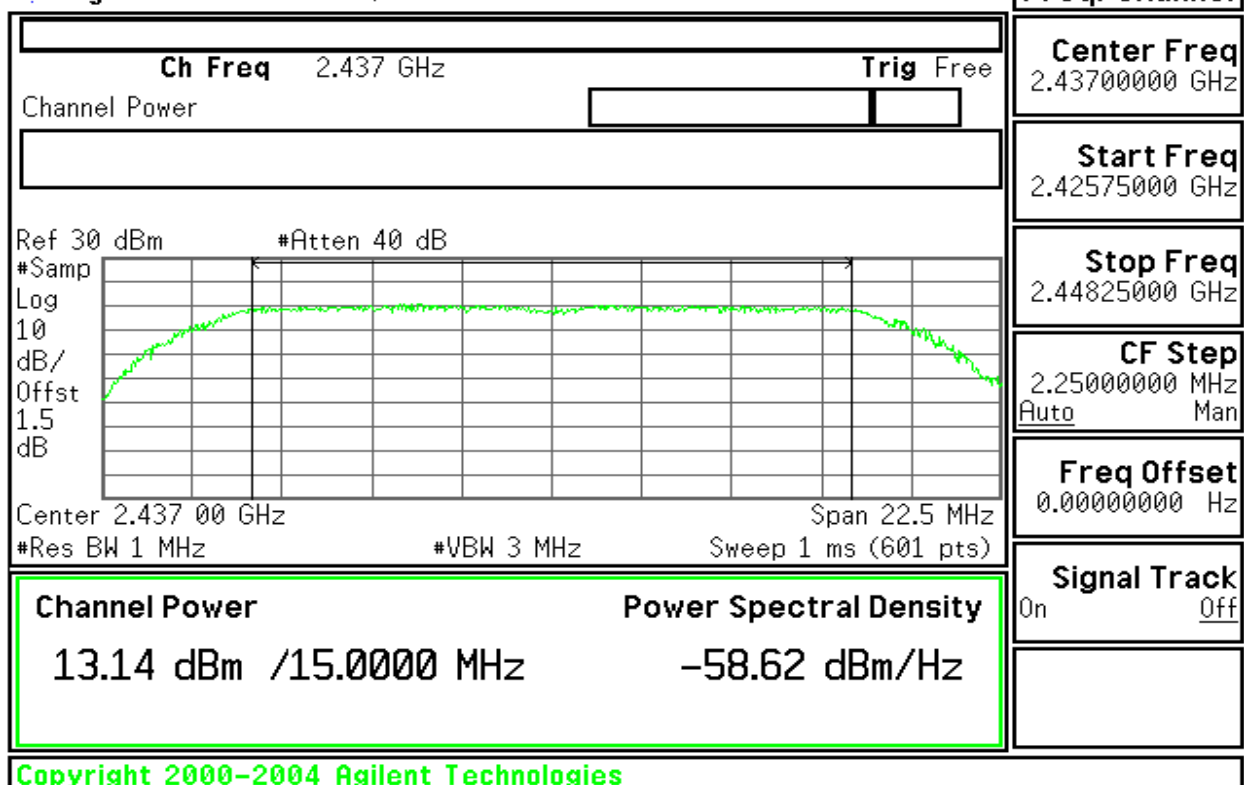



Peak Power (CH High)


* Agilent 13:13:04 Jul 22, 2006

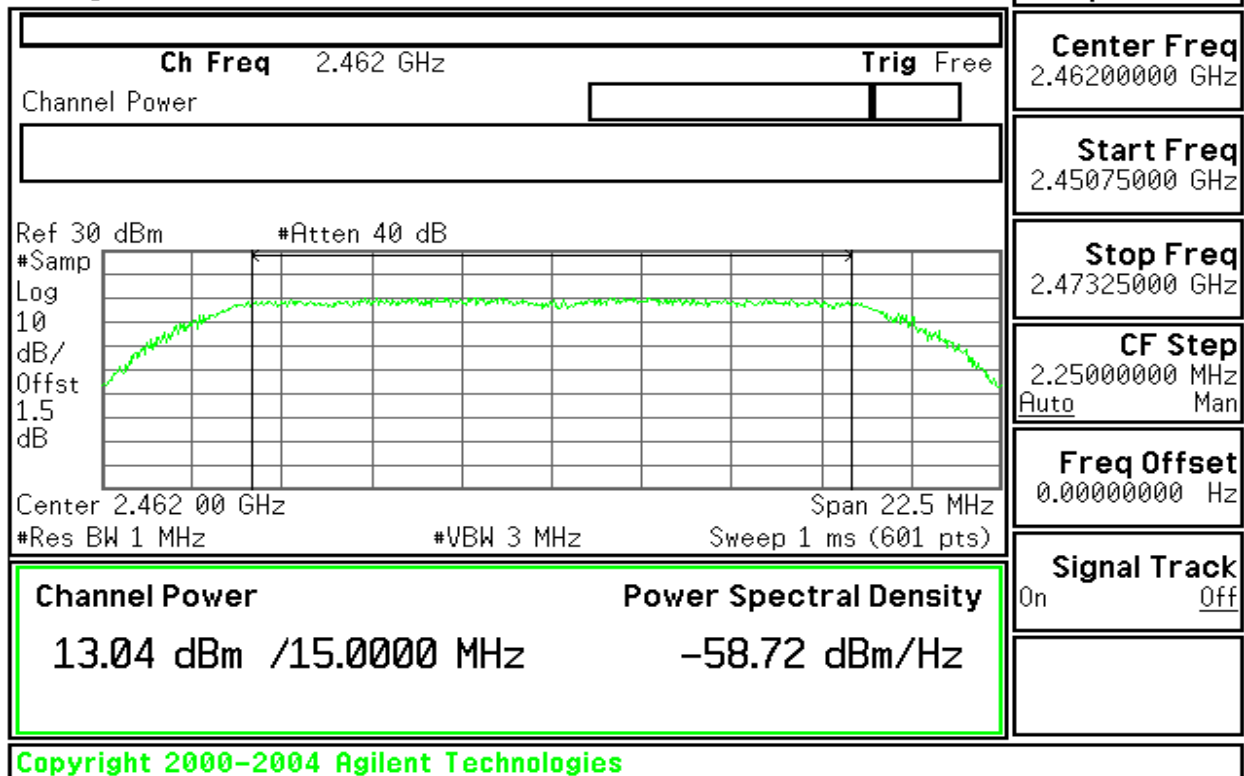

draft 802.11n Standard-20 MHz Channel mode / Chain 1

Peak Power (CH Low)


* Agilent 13:17:23 Jul 22, 2006

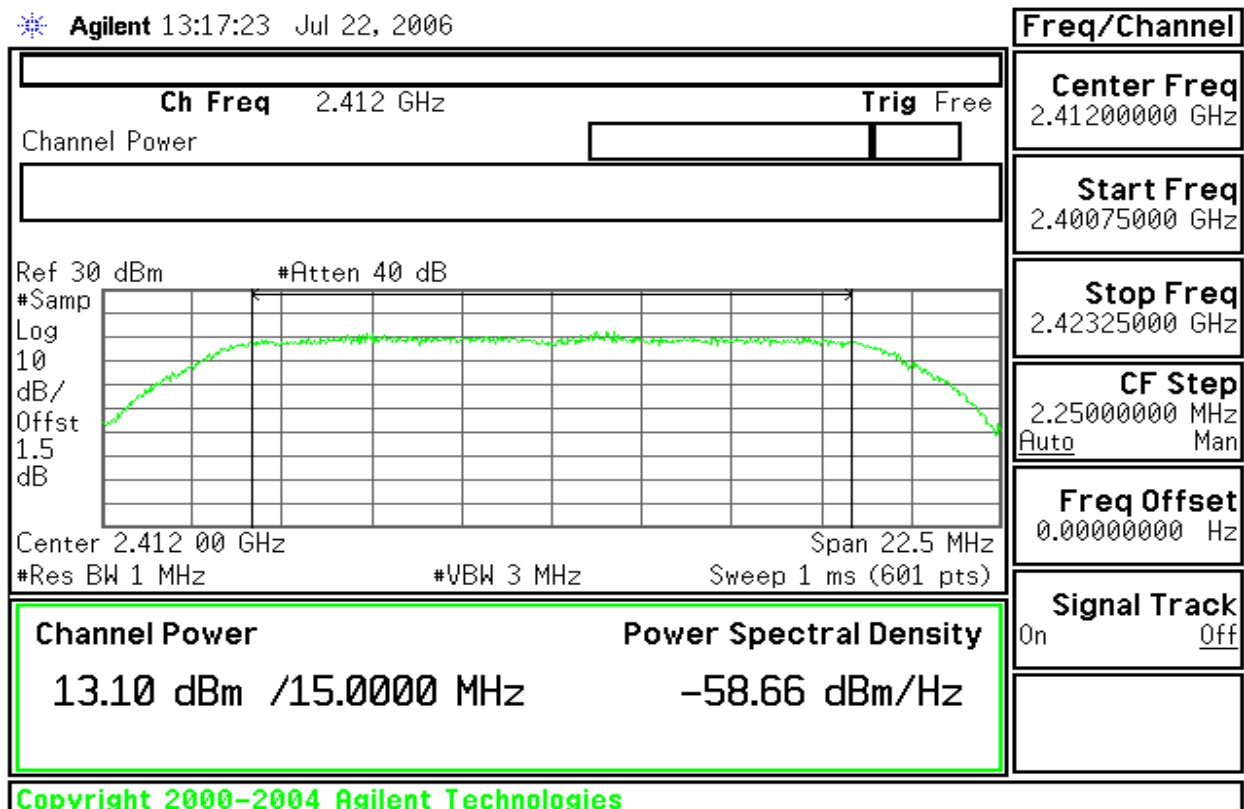




Peak Power (CH Mid)

* Agilent 13:16:22 Jul 22, 2006

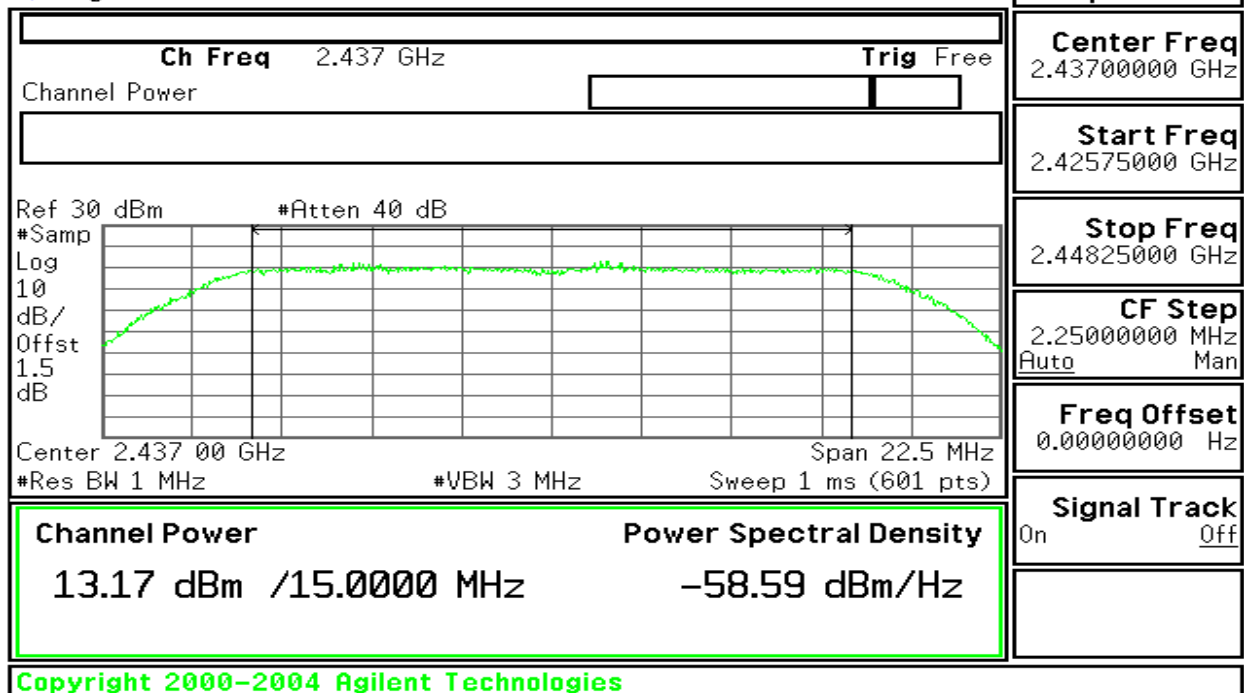

Peak Power (CH High)

* Agilent 13:15:13 Jul 22, 2006

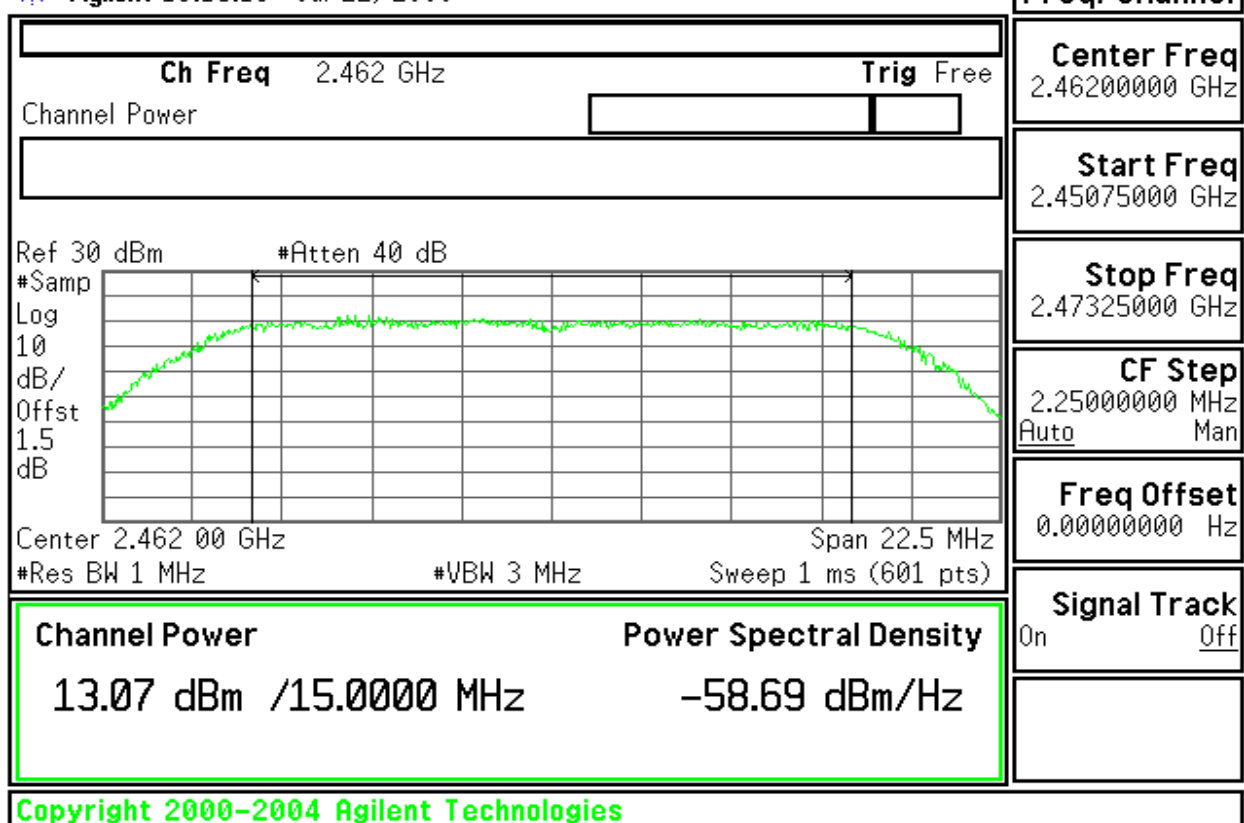




draft 802.11n Wide-40 MHz Channel mode / Chain 0


Peak Power (CH Low)

Agilent 14:54:27 Aug 2, 2006

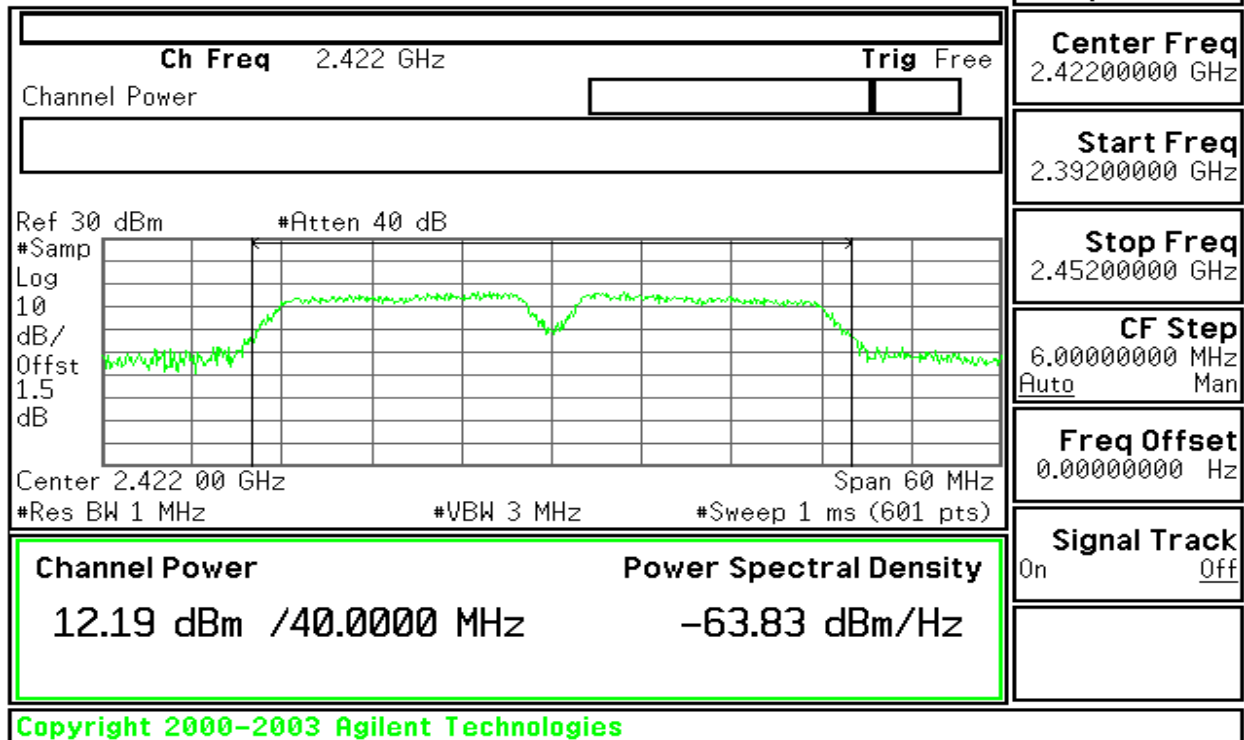


Peak Power (CH Mid)

Agilent 14:53:48 Aug 2, 2006

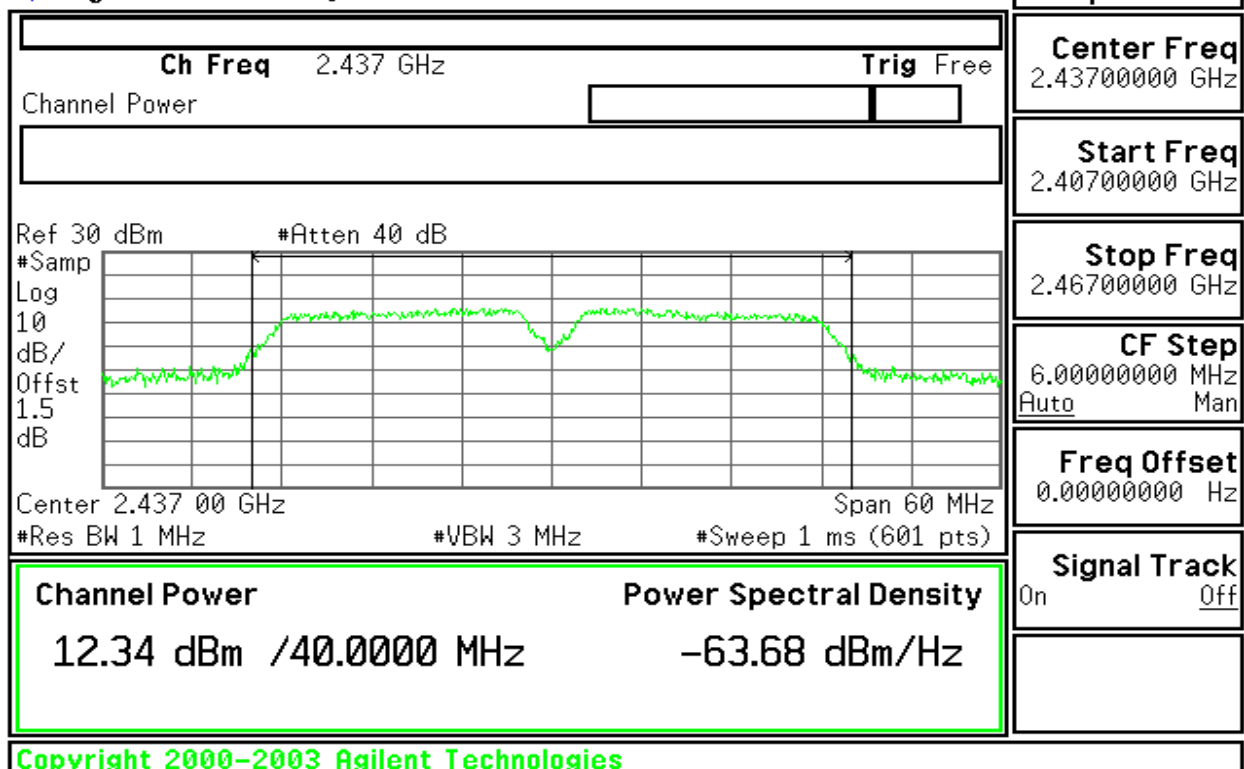

Peak Power (CH High)


Agilent 14:53:09 Aug 2, 2006

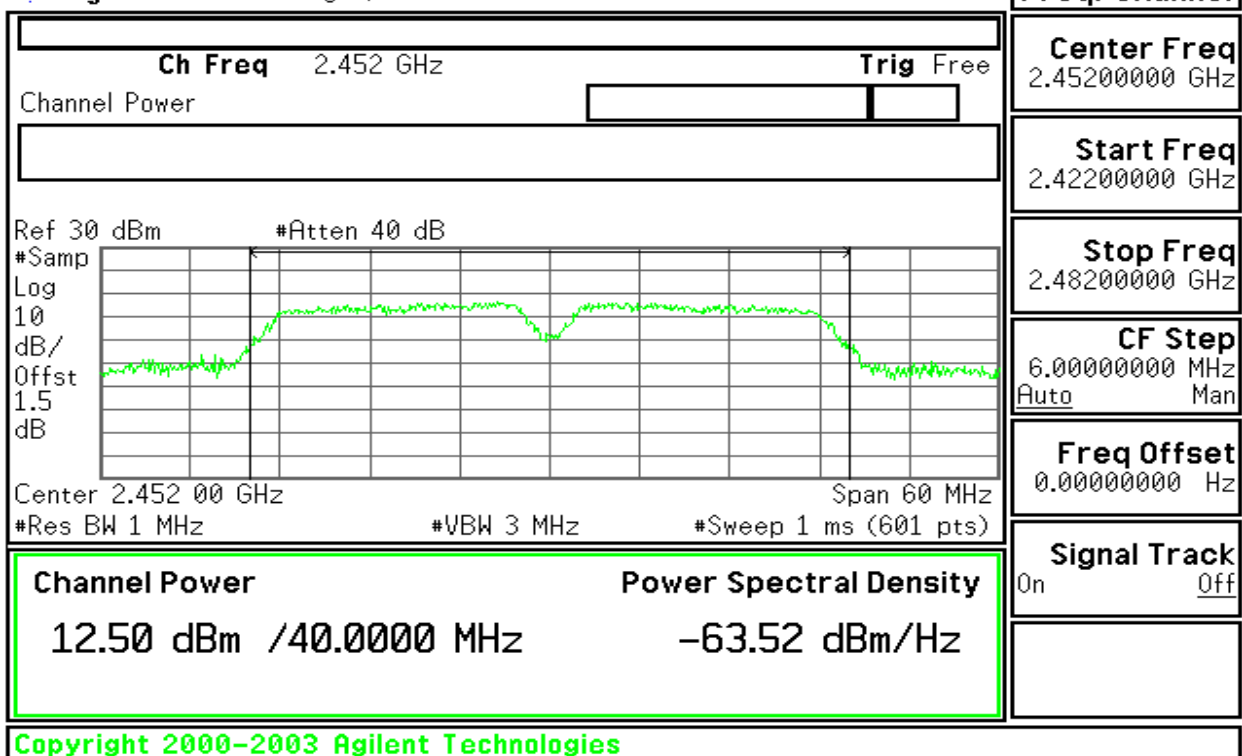

draft 802.11n Wide-40 MHz Channel mode / Chain 1

Peak Power (CH Low)


Agilent 14:49:10 Aug 2, 2006

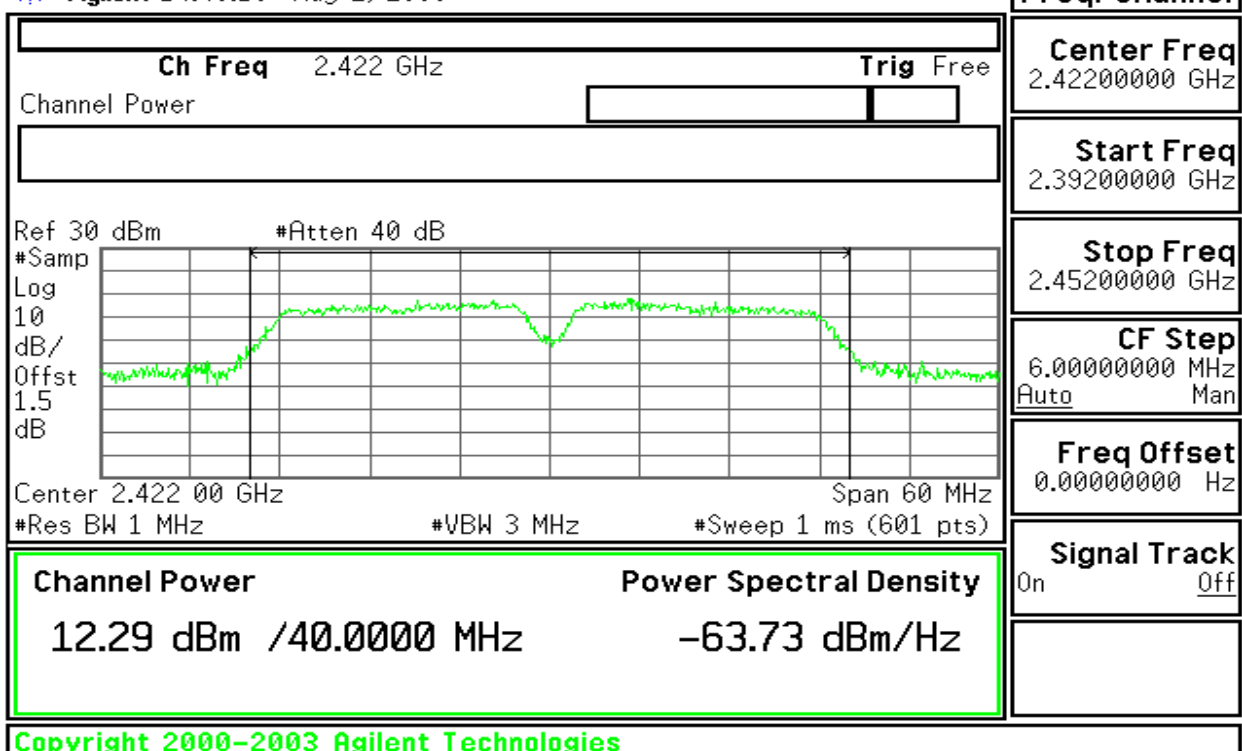




Peak Power (CH Mid)

* Agilent 14:51:16 Aug 2, 2006

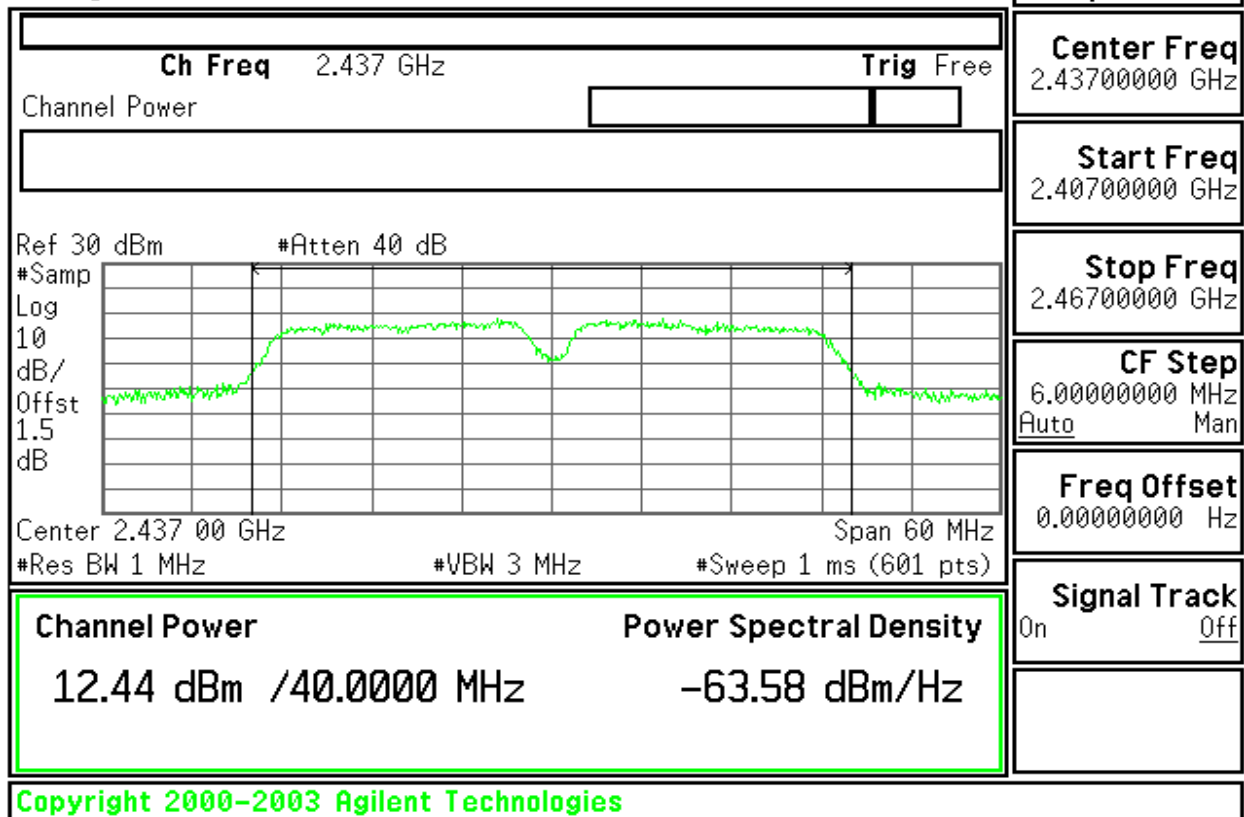

Peak Power (CH High)

* Agilent 14:52:12 Aug 2, 2006

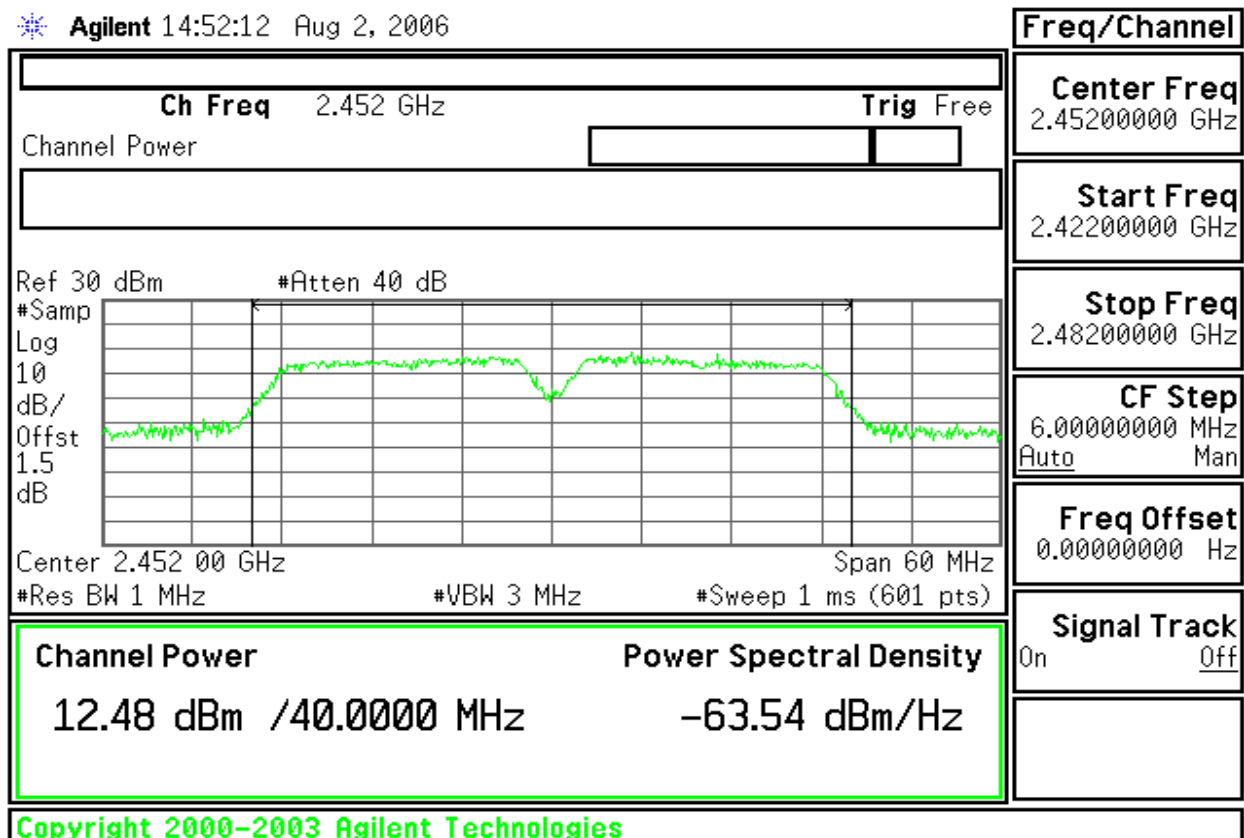




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power meter.

Output Power= $10 \log (10^{(\text{Chain 0 Output Power} / 10)} + 10^{(\text{Chain 1 Output Power} / 10)})$

**TEST RESULTS***No non-compliance noted***Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)
Low	2412	16.20	15.98	19.10
Mid	2437	16.09	16.44	*19.28
High	2462	16.01	16.48	19.26

Test mode: IEEE 802.11g 20M mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)
Low	2412	11.48	11.27	*14.39
Mid	2437	11.17	11.36	14.28
High	2462	10.94	11.49	14.23

Test mode: IEEE 802.11g 40M mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)
Low	2422	10.09	10.43	13.27
Mid	2437	10.22	10.74	13.50
High	2452	10.37	10.88	*13.64

Test mode: draft 802.11n Standard-20 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)
Low	2412	11.30	11.35	14.33
Mid	2437	11.25	11.41	14.34
High	2462	11.06	11.63	*14.36

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Output Power (dBm)
Low	2422	9.82	10.07	12.96
Mid	2437	9.94	10.13	13.05
High	2452	9.98	10.56	*13.29




7.4 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration

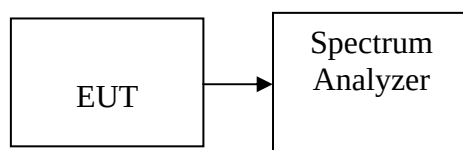

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.
5. $PPSD\ Total = 10 \log (10^{(PPSD\ Chain\ 0 / 10)} + 10^{(PPSD\ Chain\ 1 / 10)})$



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD Chain 0 (dBm)	PPSD Chain 1 (dBm)	PPSD Total (dBm)	Limit (dBm)	Result
Low	2412	-11.16	-11.58	-8.35	8.00	PASS
Mid	2437	-11.61	-11.41	-8.50	8.00	PASS
High	2462	-11.77	-11.58	-8.66	8.00	PASS

Test mode: IEEE 802.11g 20M mode

Channel	Frequency (MHz)	PPSD Chain 0 (dBm)	PPSD Chain 1 (dBm)	PPSD Total (dBm)	Limit (dBm)	Result
Low	2412	-17.33	-17.73	-14.52	8.00	PASS
Mid	2437	-17.68	-17.07	-14.35	8.00	PASS
High	2462	-17.01	-17.64	-14.30	8.00	PASS

Test mode: IEEE 802.11g 40M mode

Channel	Frequency (MHz)	PPSD Chain 0 (dBm)	PPSD Chain 1 (dBm)	PPSD Total (dBm)	Limit (dBm)	Result
Low	2422	-19.47	-18.64	-16.02	8.00	PASS
Mid	2437	-19.56	-18.73	-16.11	8.00	PASS
High	2452	-19.17	-18.49	-15.81	8.00	PASS

Test mode: draft 802.11n Standard-20 MHz Channel mode


Channel	Frequency (MHz)	PPSD Chain 0 (dBm)	PPSD Chain 1 (dBm)	PPSD Total (dBm)	Limit (dBm)	Result
Low	2412	-15.87	-16.69	-13.25	8.00	PASS
Mid	2437	-16.01	-16.53	-13.25	8.00	PASS
High	2462	-16.26	-17.35	-13.76	8.00	PASS

Test mode: draft 802.11n Wide-40 MHz Channel mode

Channel	Frequency (MHz)	PPSD Chain 0 (dBm)	PPSD Chain 1 (dBm)	PPSD Total (dBm)	Limit (dBm)	Result
Low	2422	-19.31	-17.25	-15.15	8.00	PASS
Mid	2437	-19.34	-18.54	-15.91	8.00	PASS
High	2452	-19.29	-18.48	-15.86	8.00	PASS

**Test Plot****IEEE 802.11b mode Chain 0****PPSD (CH Low)**

* Agilent 14:30:37 Jul 19, 2006

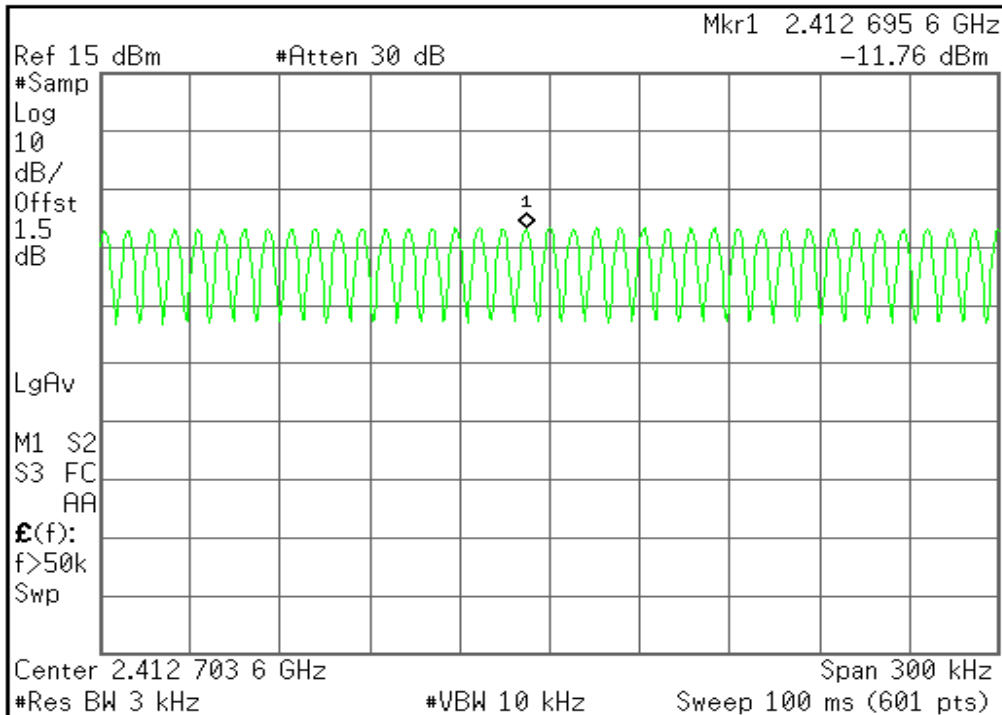

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More
1 of 2

Copyright 2000–2004 Agilent Technologies

PPSD (CH Mid)

* Agilent 14:31:34 Jul 19, 2006

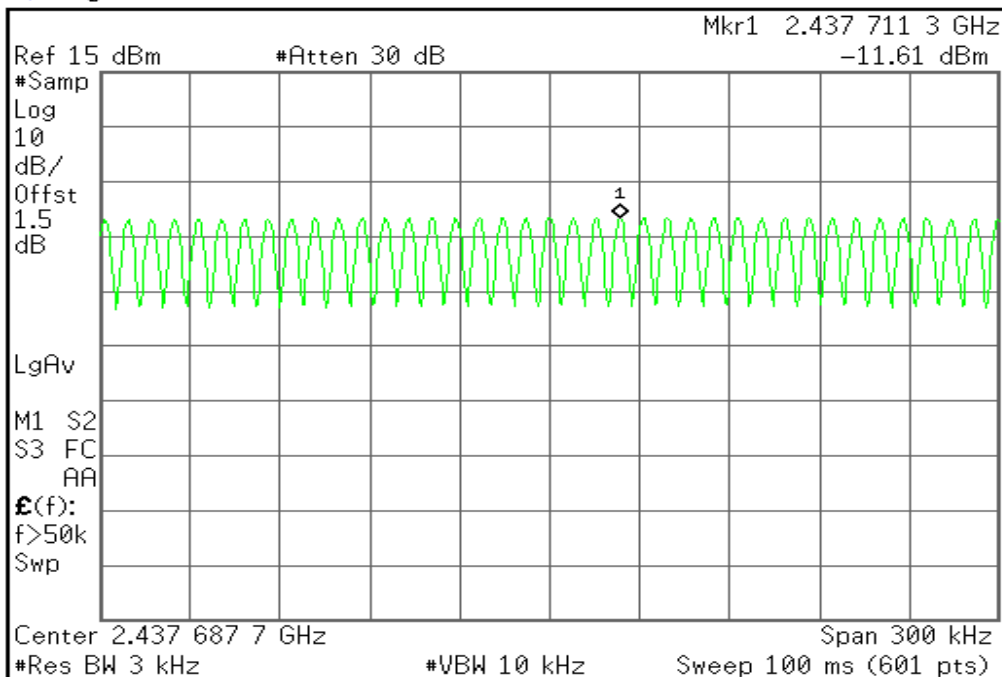

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More
1 of 2

Copyright 2000–2004 Agilent Technologies

**PPSD (CH High)**


Agilent 14:32:26 Jul 19, 2006

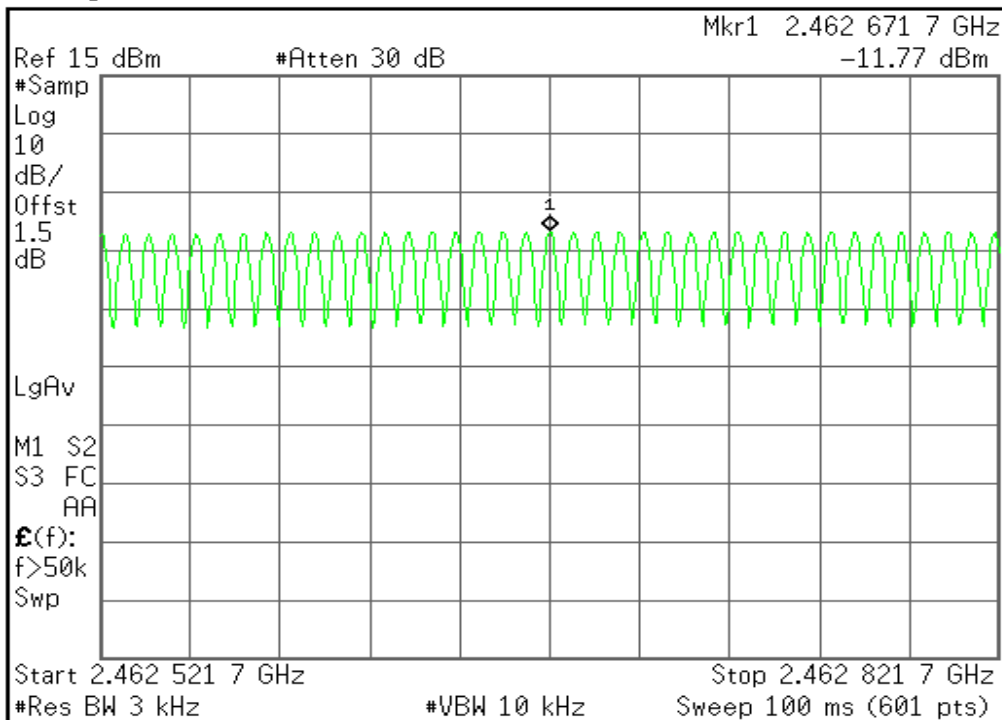**Peak Search****Next Peak****Next Pk Right****Next Pk Left****Min Search****Pk-Pk Search****Mkr → CF****More**
1 of 2

Copyright 2000–2004 Agilent Technologies

IEEE 802.11b mode Chain 1**PPSD (CH Low)**

Agilent 14:46:09 Jul 19, 2006

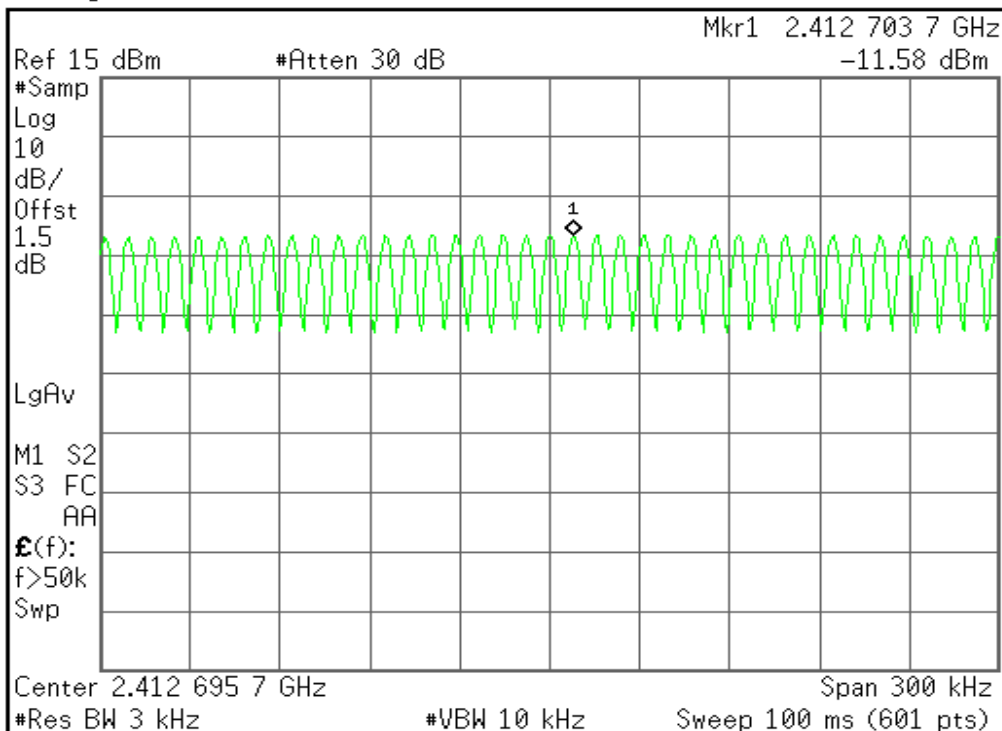
**Peak Search****Next Peak****Next Pk Right****Next Pk Left****Min Search****Pk-Pk Search****Mkr → CF****More**
1 of 2

Copyright 2000–2004 Agilent Technologies



PPSD (CH Mid)

* Agilent 14:45:21 Jul 19, 2006

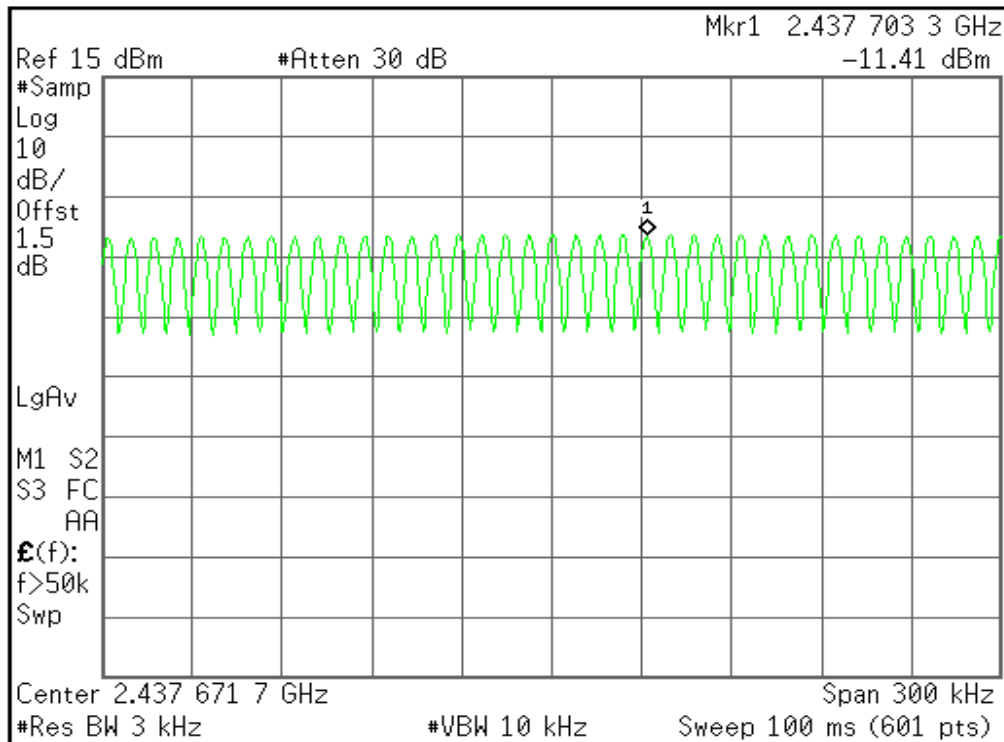

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More
1 of 2

Copyright 2000–2004 Agilent Technologies

PPSD (CH High)

* Agilent 14:44:32 Jul 19, 2006

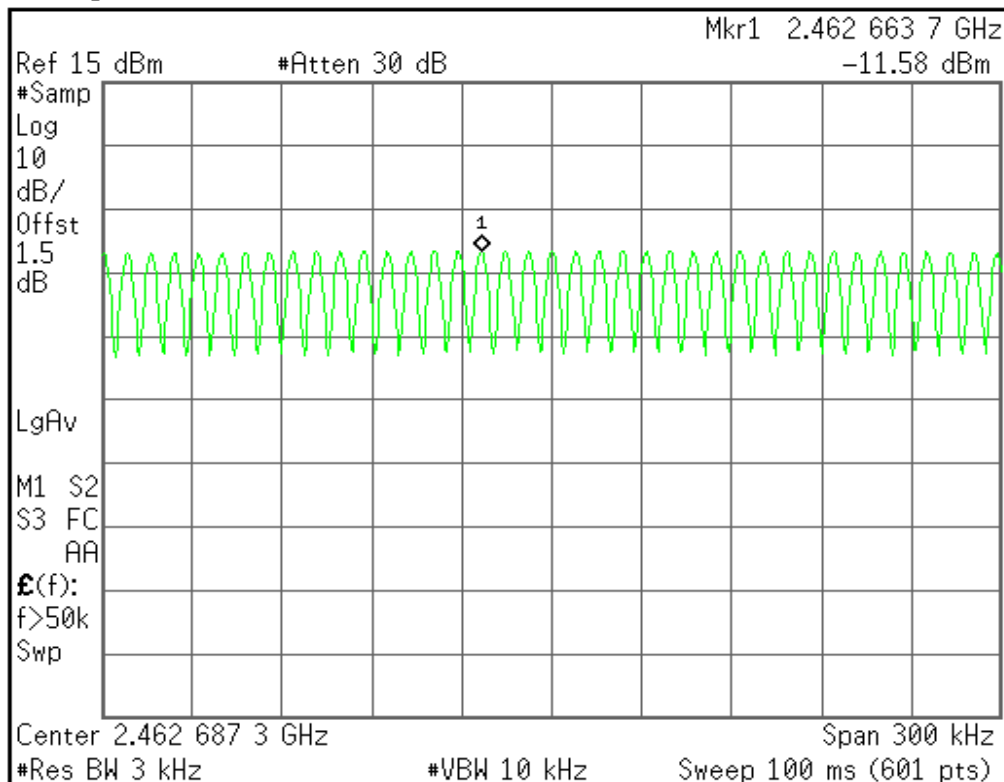

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More
1 of 2


Unable to save file



IEEE 802.11g 20M mode Chain 0

PPSD (CH Low)

Agilent 14:38:04 Jul 19, 2006

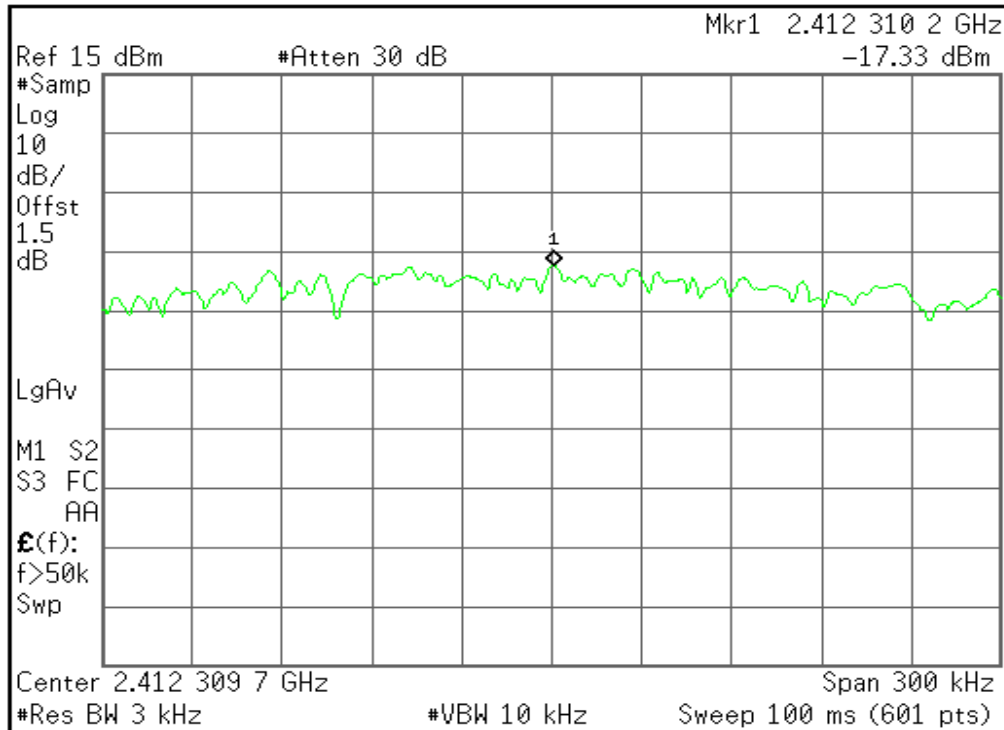

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More
1 of 2

Copyright 2000-2004 Agilent Technologies

PPSD (CH Mid)

Agilent 14:37:02 Jul 19, 2006

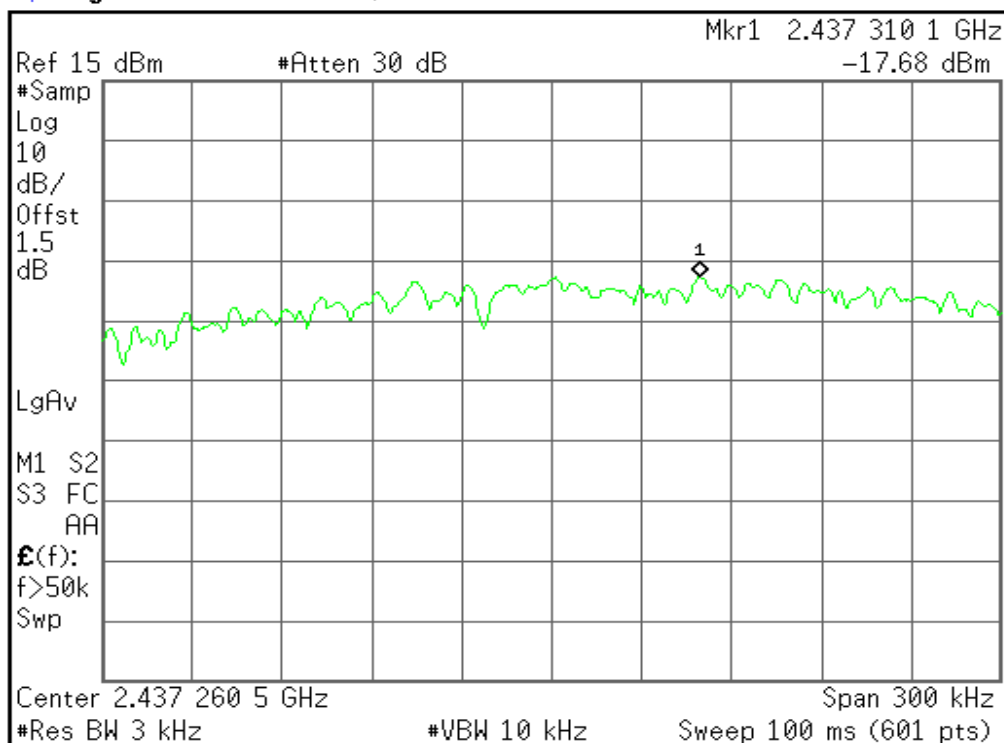

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF


More
1 of 2

Copyright 2000-2004 Agilent Technologies



PPSD (CH High)

* Agilent 14:35:10 Jul 19, 2006

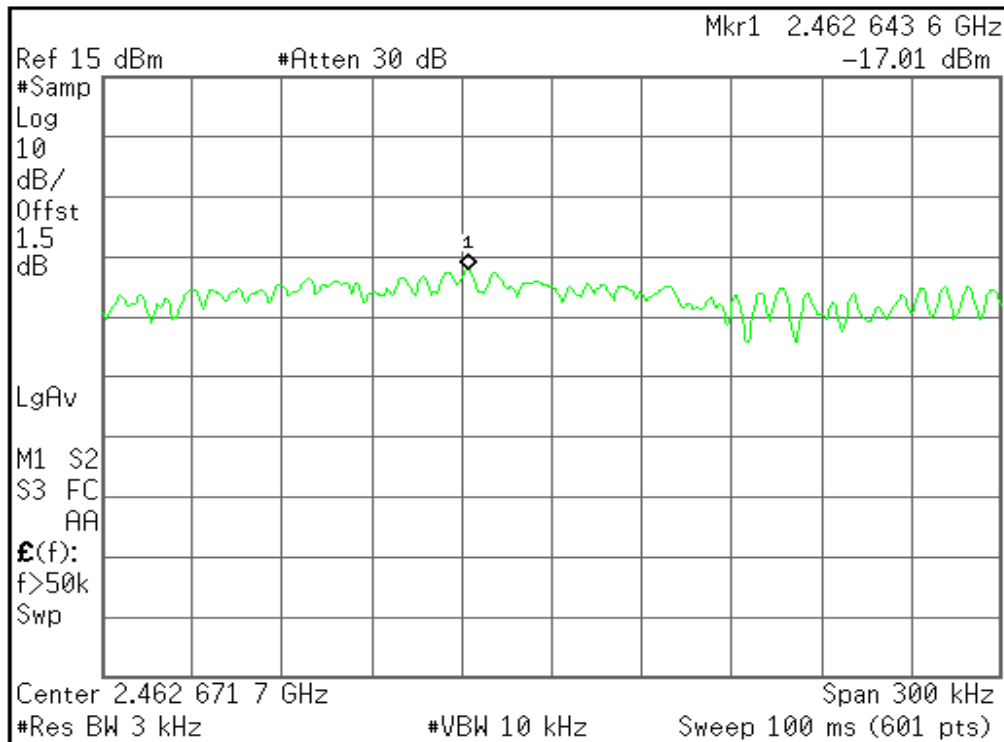

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF


More
1 of 2

Copyright 2000-2004 Agilent Technologies

IEEE 802.11g 20M mode Chain 1

PPSD (CH Low)

* Agilent 14:40:10 Jul 19, 2006

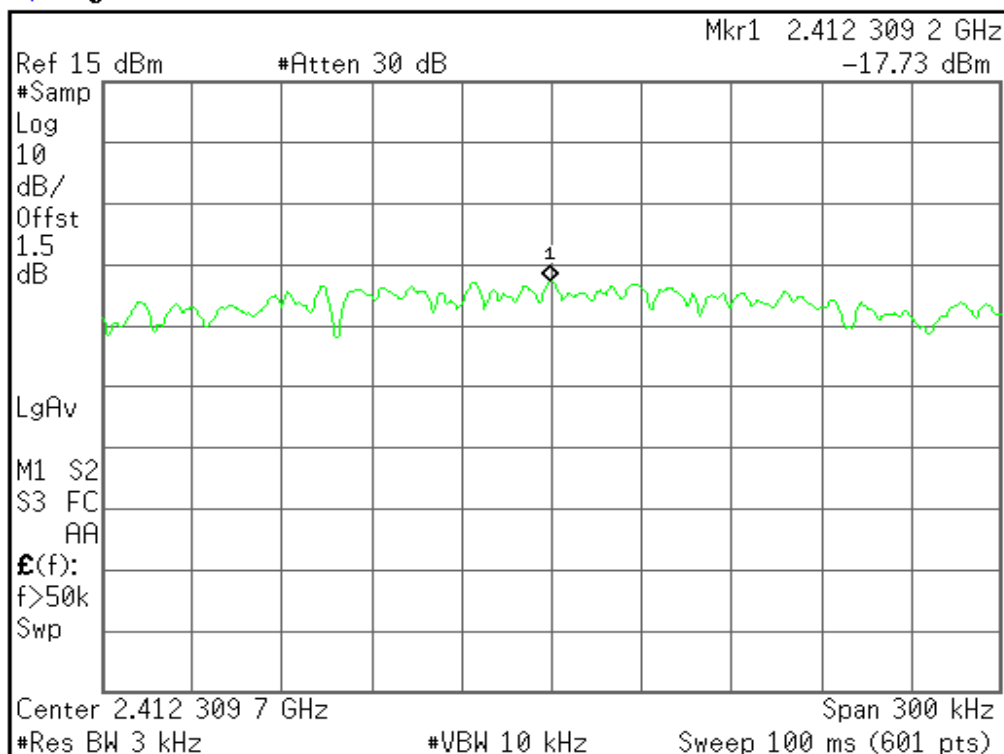

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF


More
1 of 2

Copyright 2000-2004 Agilent Technologies



PPSD (CH Mid)

* Agilent 14:41:24 Jul 19, 2006

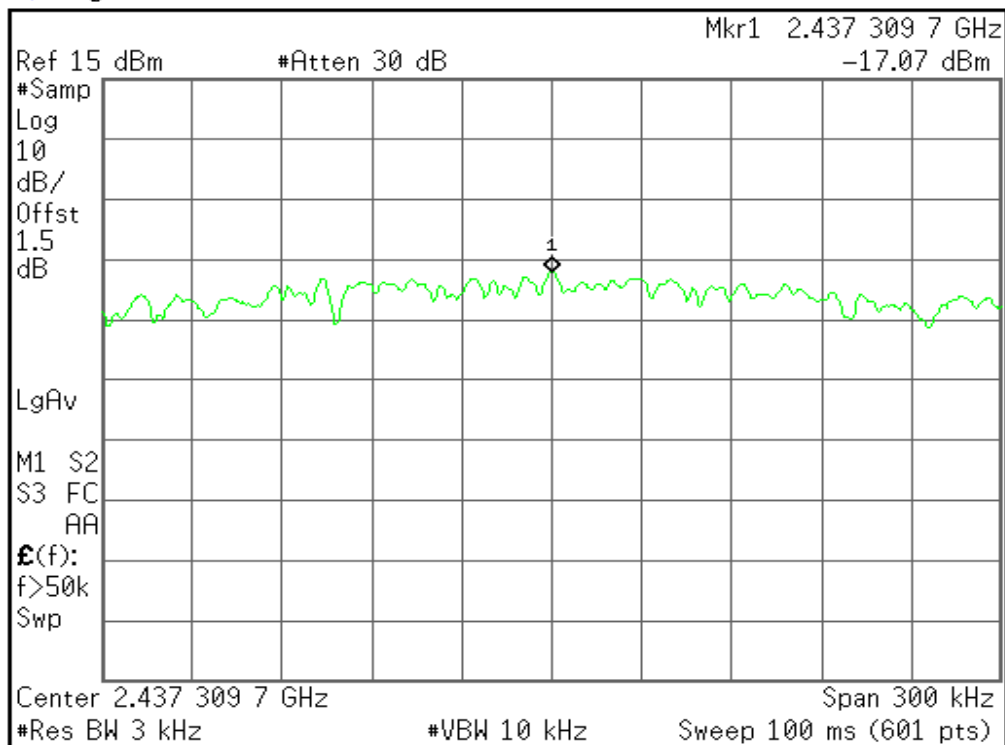

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More
1 of 2

Copyright 2000-2004 Agilent Technologies

PPSD (CH High)

* Agilent 14:42:19 Jul 19, 2006

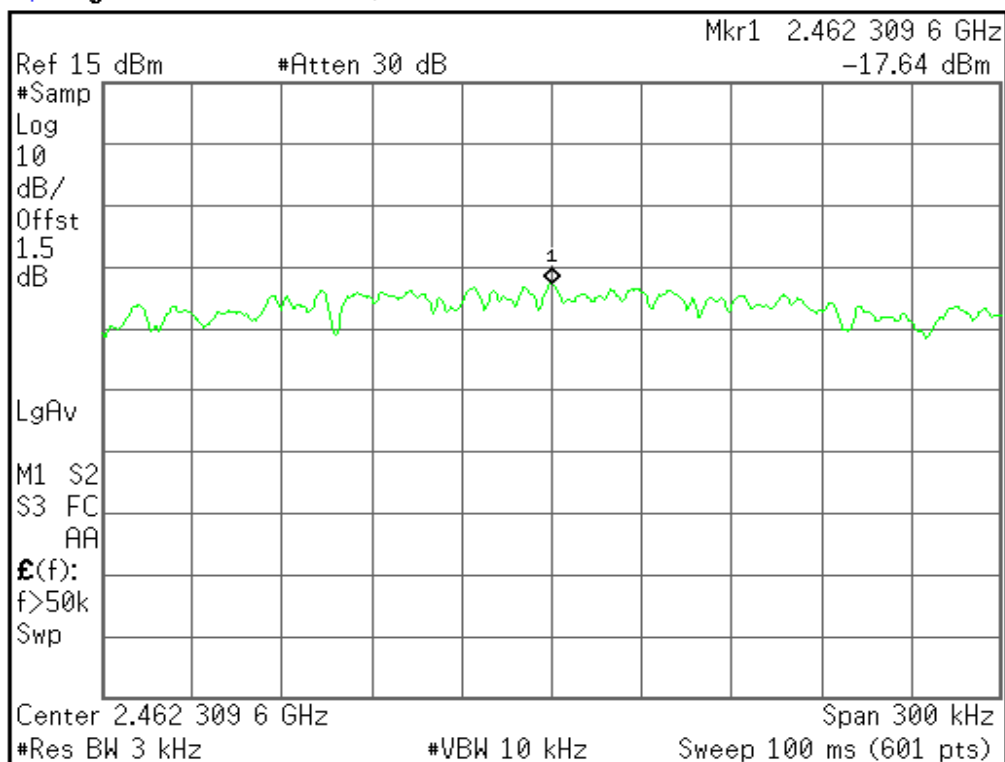

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More
1 of 2


Copyright 2000-2004 Agilent Technologies



IEEE 802.11g 40M mode Chain 0

PPSD (CH Low)

Agilent 15:57:38 Aug 3, 2006

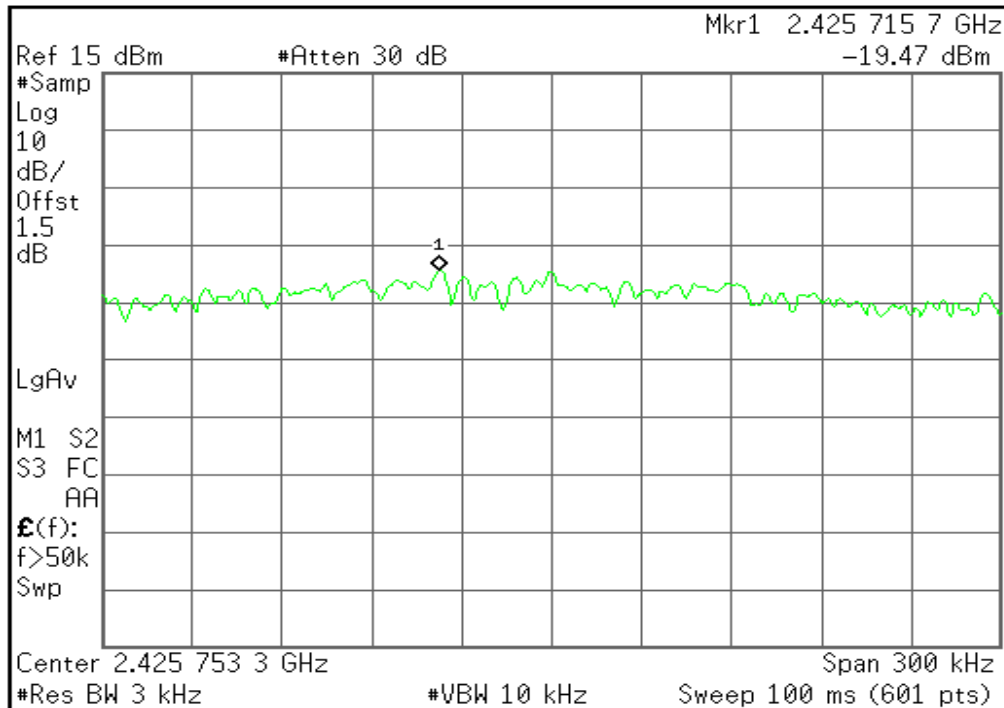

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More
1 of 2

Copyright 2000-2004 Agilent Technologies

PPSD (CH Mid)

Agilent 15:58:53 Aug 3, 2006

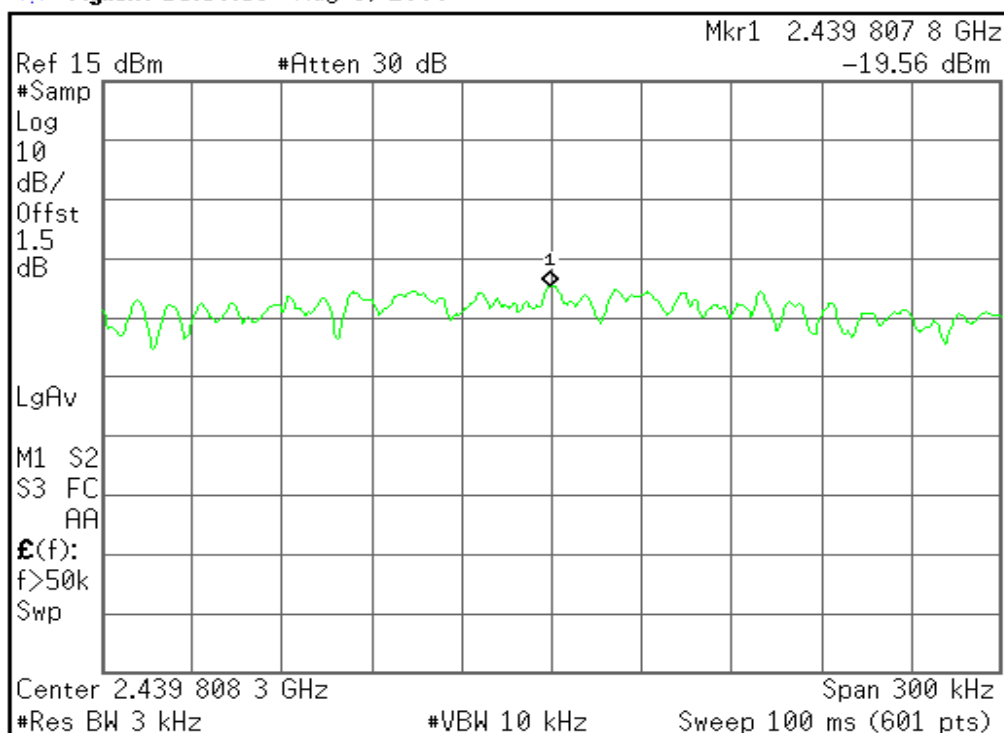

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF


More
1 of 2

Copyright 2000-2004 Agilent Technologies



PPSD (CH High)

* Agilent 16:00:09 Aug 3, 2006

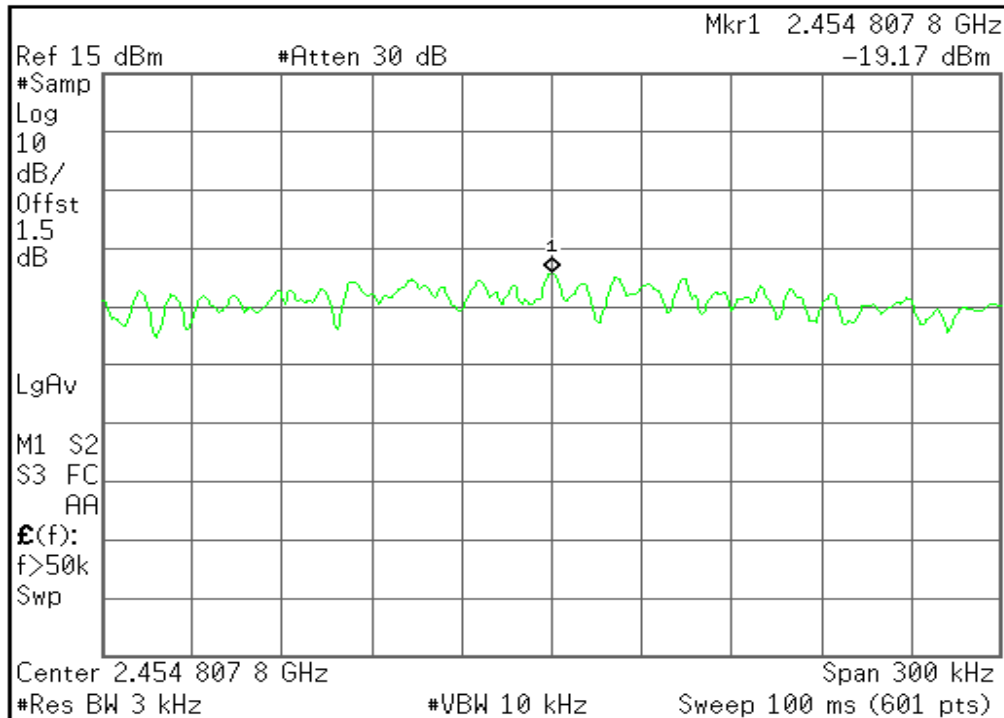

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF


More
1 of 2

Copyright 2000–2004 Agilent Technologies

IEEE 802.11g 40M mode Chain 1

PPSD (CH Low)

* Agilent 16:04:10 Aug 3, 2006

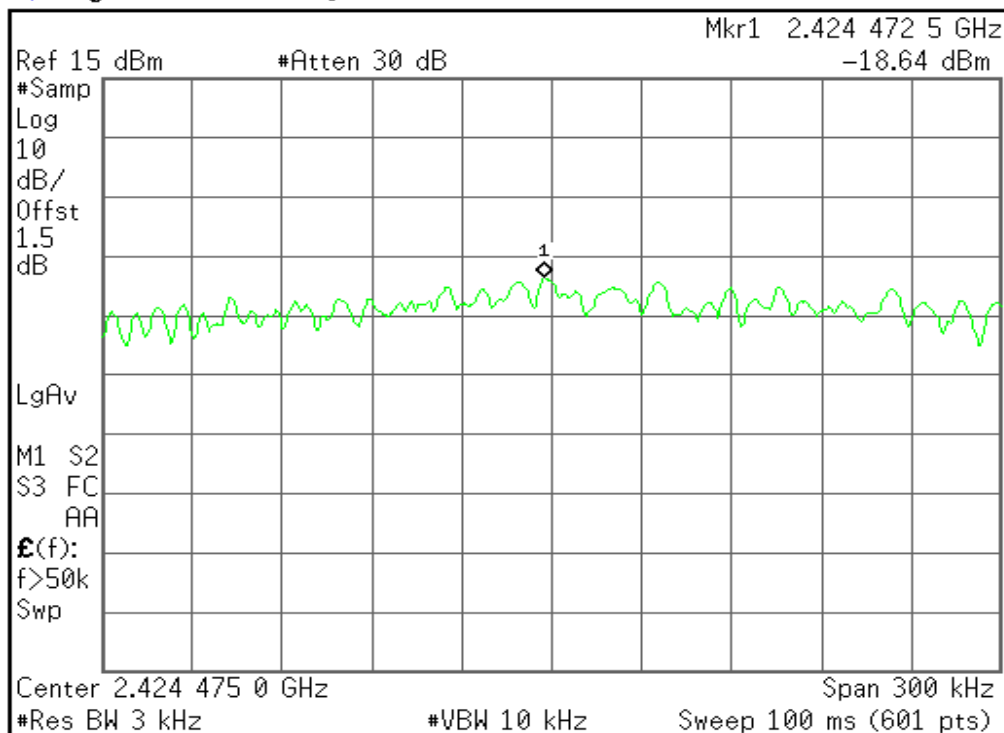

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF


More
1 of 2

Copyright 2000–2004 Agilent Technologies



PPSD (CH Mid)

Agilent 16:03:15 Aug 3, 2006

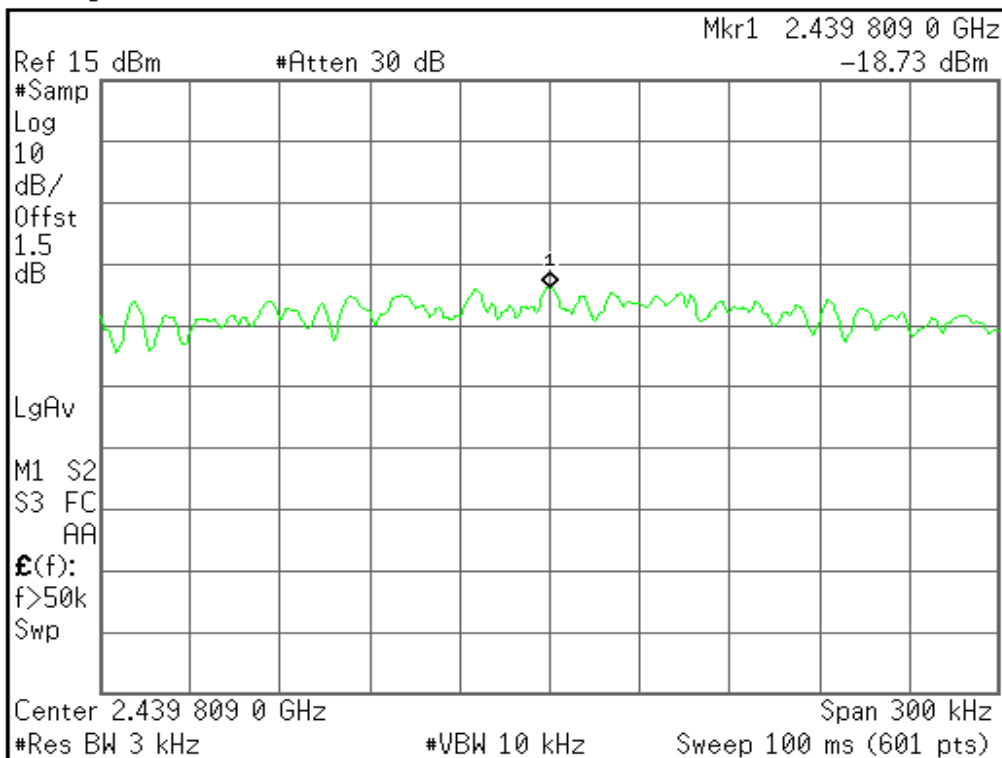

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More
1 of 2

Copyright 2000-2004 Agilent Technologies

PPSD (CH High)

Agilent 16:02:16 Aug 3, 2006

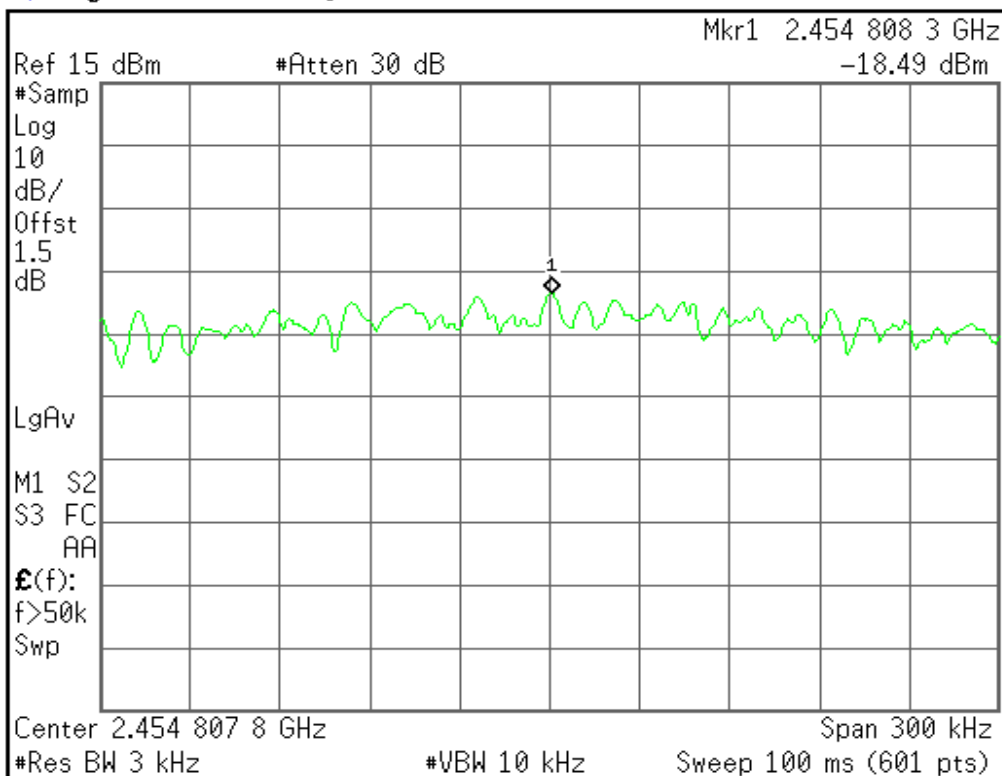

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More
1 of 2


Copyright 2000-2004 Agilent Technologies



draft 802.11n Standard-20 MHz Channel mode / Chain 0

PPSD (CH Low)

* Agilent 13:29:30 Jul 22, 2006

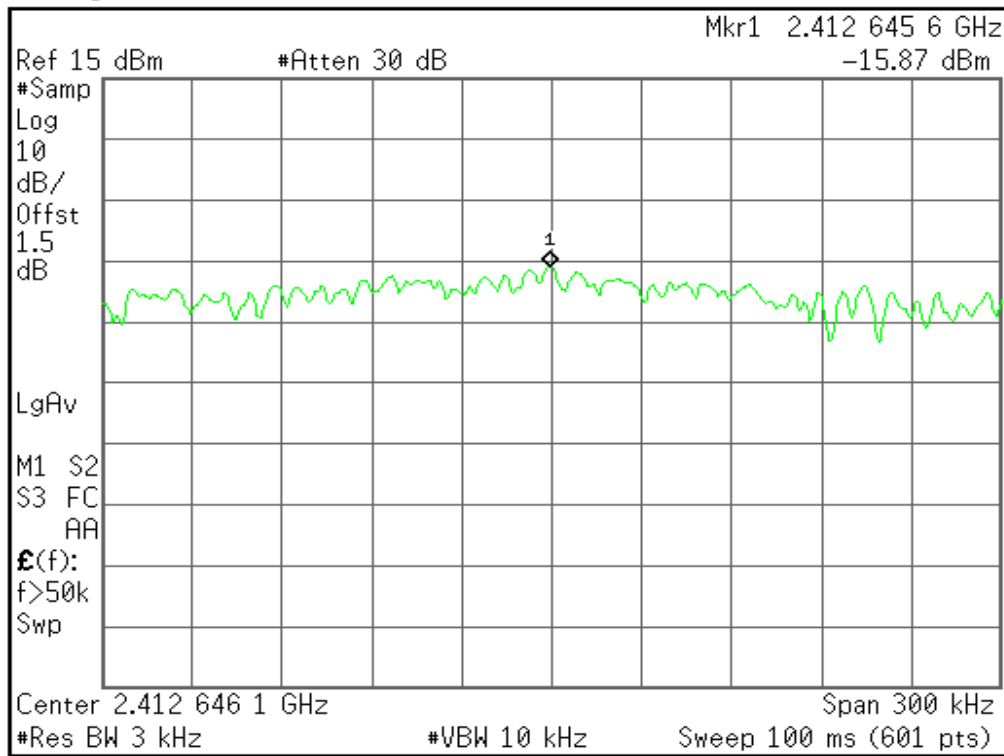

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More
1 of 2

Copyright 2000-2004 Agilent Technologies

PPSD (CH Mid)

* Agilent 13:27:26 Jul 22, 2006

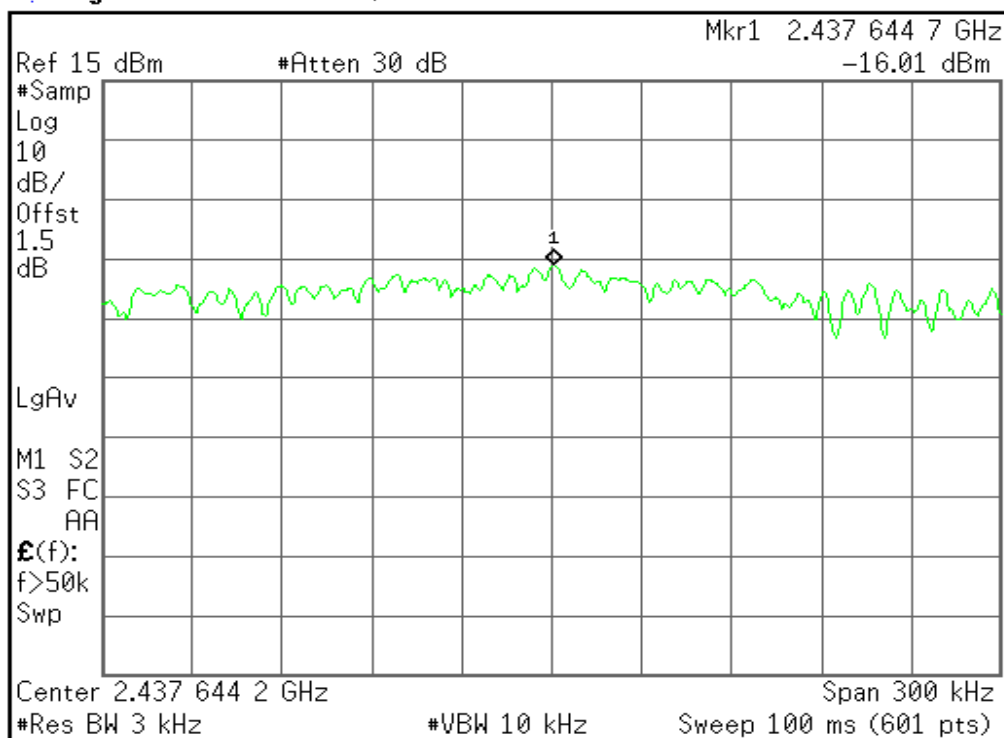

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF


More
1 of 2

Copyright 2000-2004 Agilent Technologies



PPSD (CH High)

* Agilent 13:25:56 Jul 22, 2006

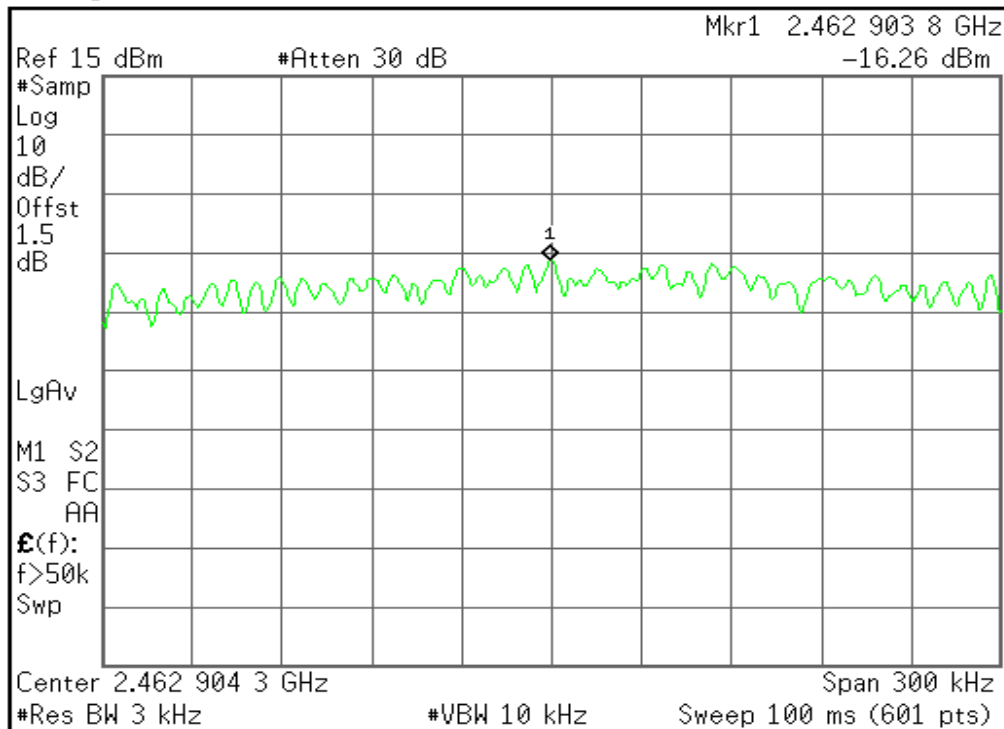

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF


More
1 of 2

Unable to save file

draft 802.11n Standard-20 MHz Channel mode / Chain 1

PPSD (CH Low)

* Agilent 13:20:06 Jul 22, 2006

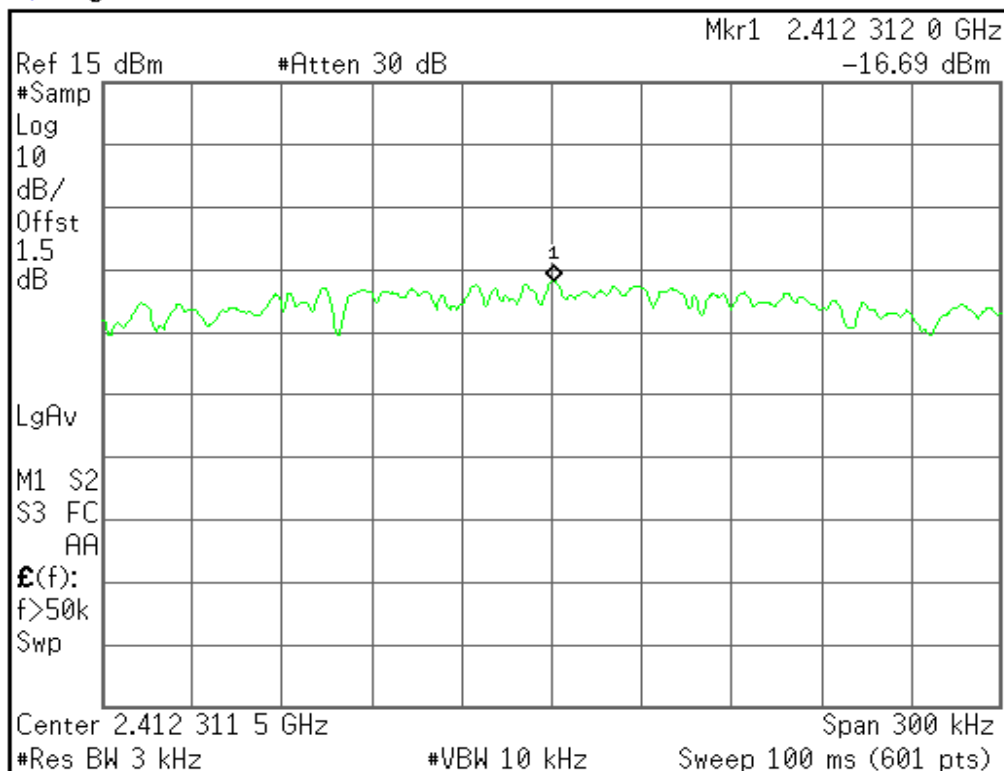

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF


More
1 of 2

Copyright 2000-2004 Agilent Technologies



PPSD (CH Mid)

Agilent 13:21:04 Jul 22, 2006

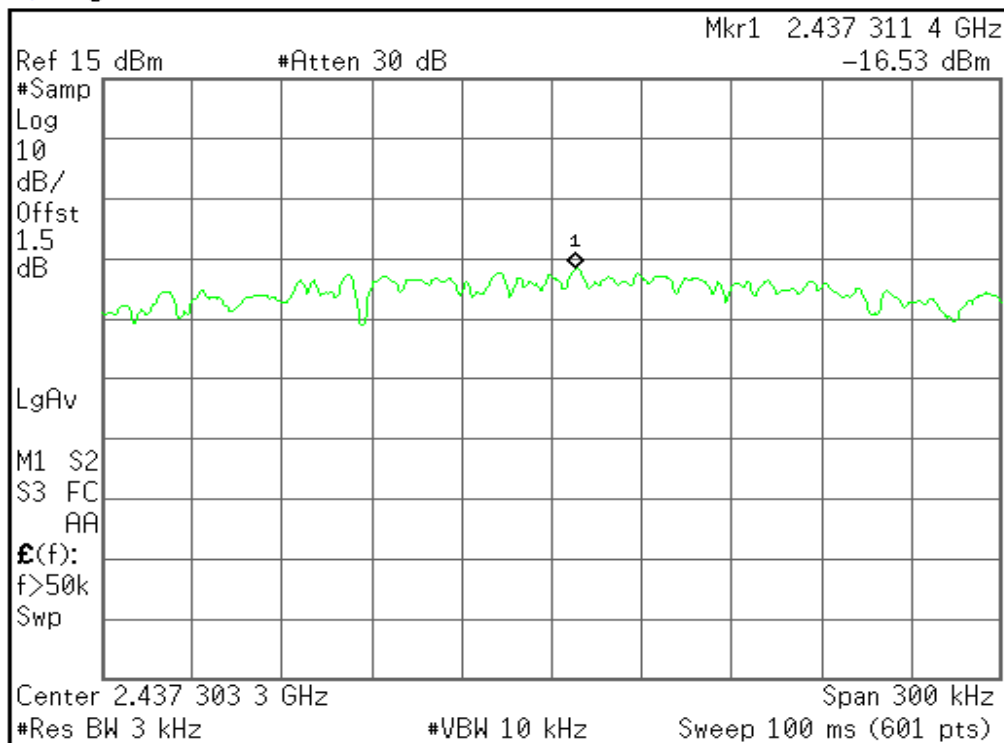

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More
1 of 2

Copyright 2000-2004 Agilent Technologies

PPSD (CH High)

Agilent 13:22:05 Jul 22, 2006

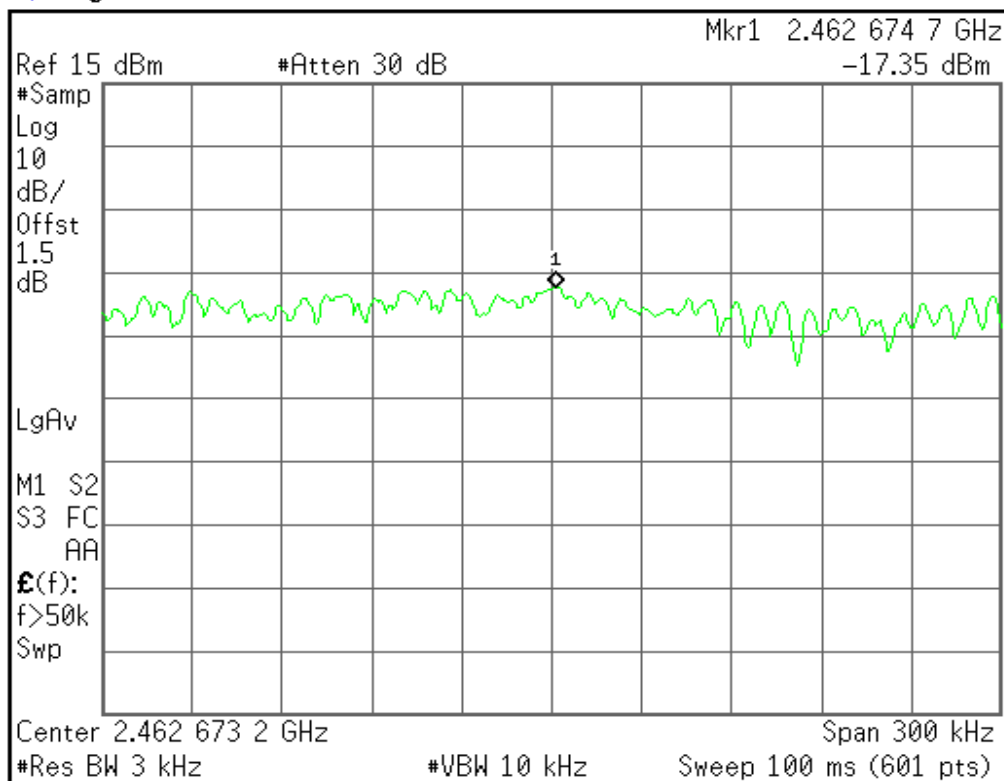

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More
1 of 2


Copyright 2000-2004 Agilent Technologies



draft 802.11n Wide-40 MHz Channel mode / Chain 0

PPSD (CH Low)

Agilent 15:03:40 Aug 2, 2006

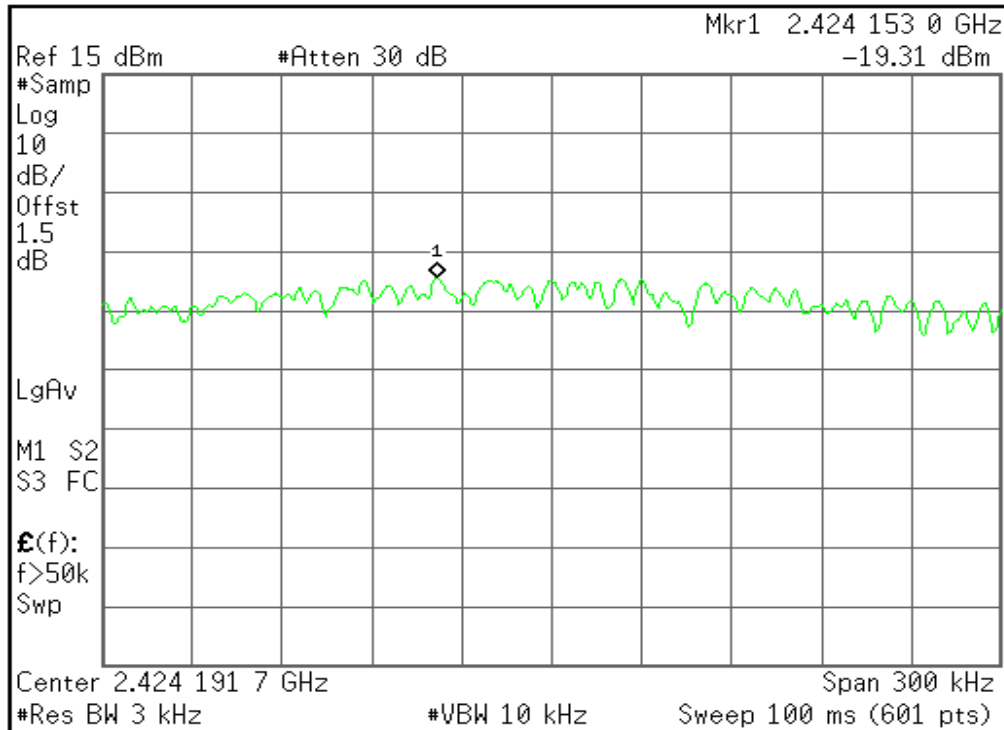

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More
1 of 2

Copyright 2000-2003 Agilent Technologies

PPSD (CH Mid)

Agilent 15:04:41 Aug 2, 2006

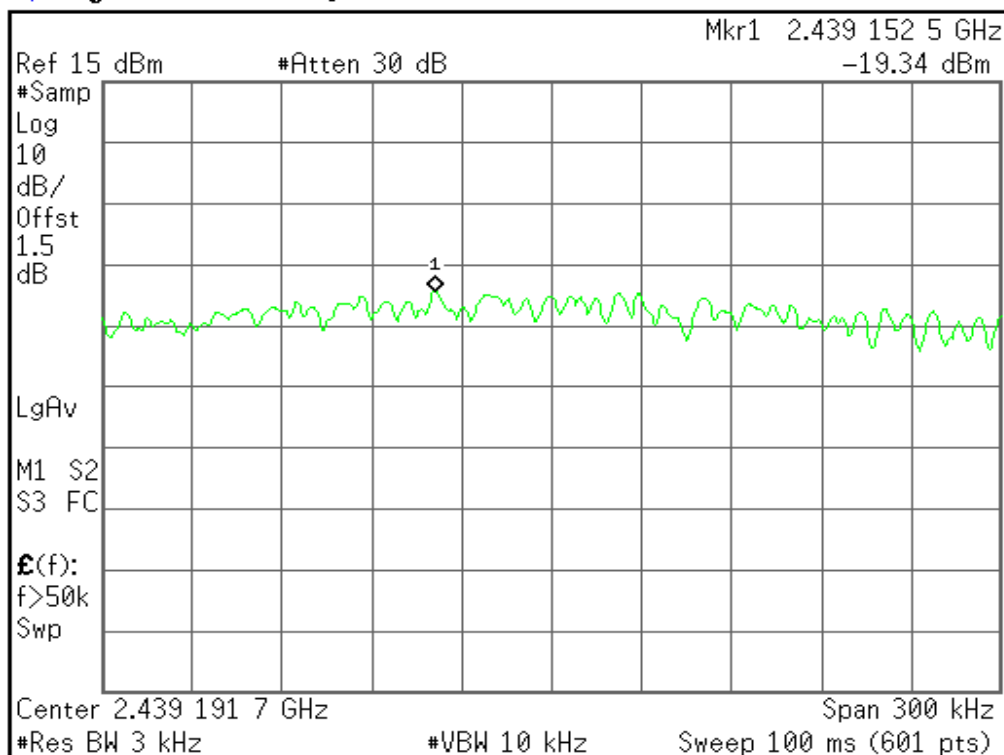

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF


More
1 of 2

Copyright 2000-2003 Agilent Technologies



PPSD (CH High)

Agilent 15:05:34 Aug 2, 2006

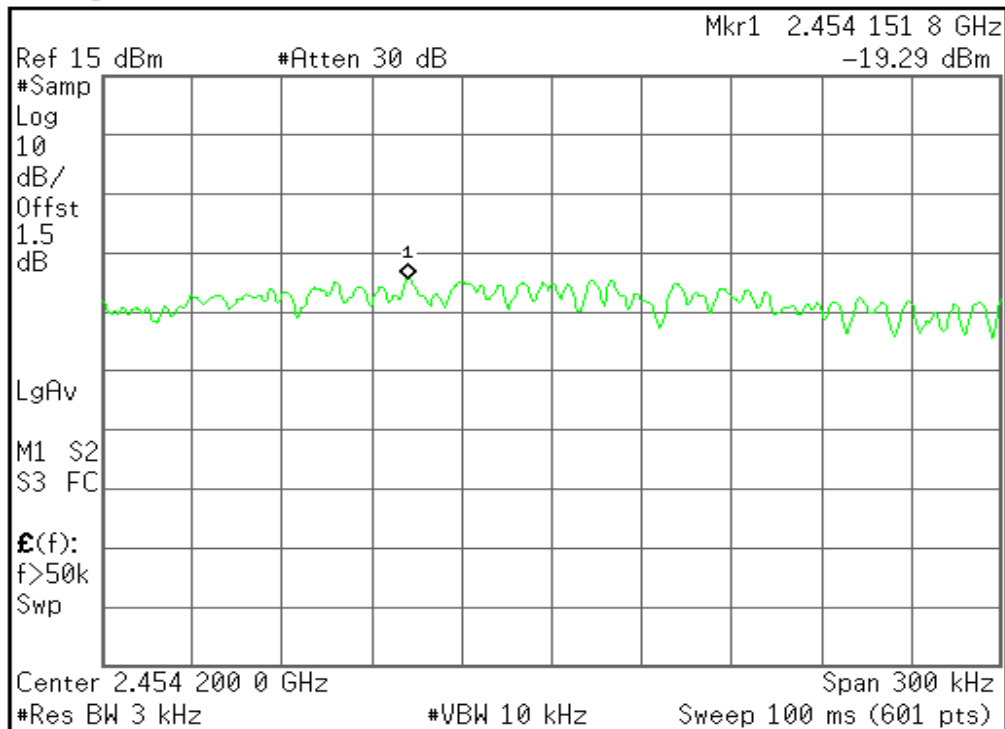

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF


More
1 of 2

Copyright 2000-2003 Agilent Technologies

draft 802.11n Wide-40 MHz Channel mode / Chain 1

PPSD (CH Low)

Agilent 15:18:29 Aug 2, 2006

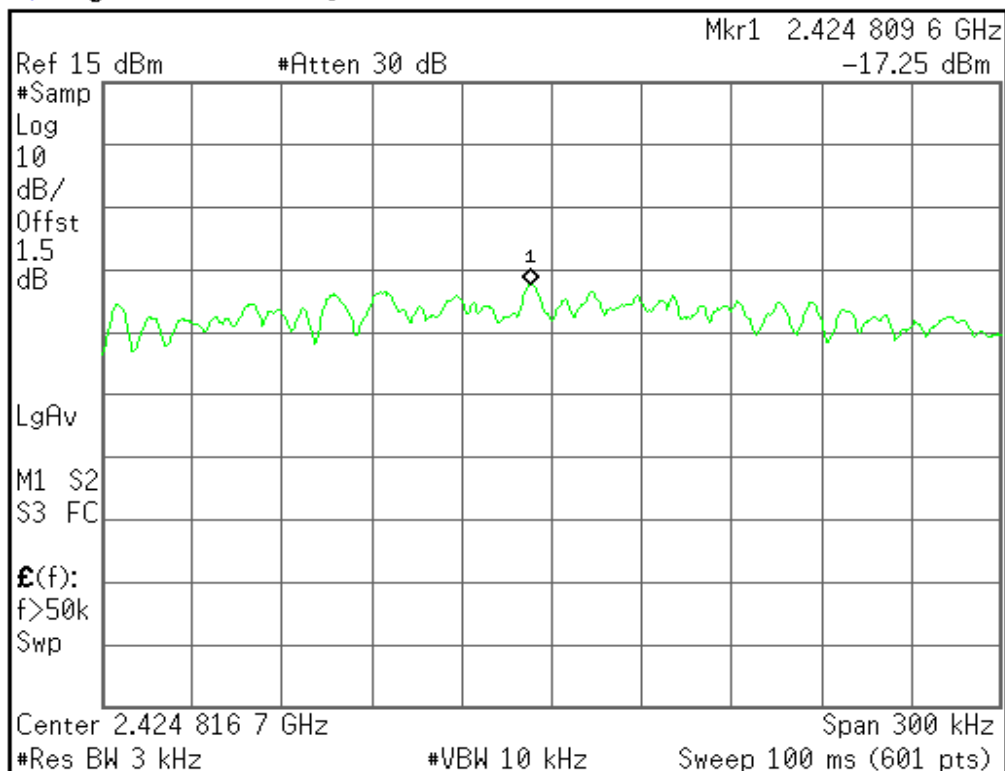

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF


More
1 of 2

Copyright 2000-2003 Agilent Technologies



PPSD (CH Mid)

* Agilent 15:07:55 Aug 2, 2006

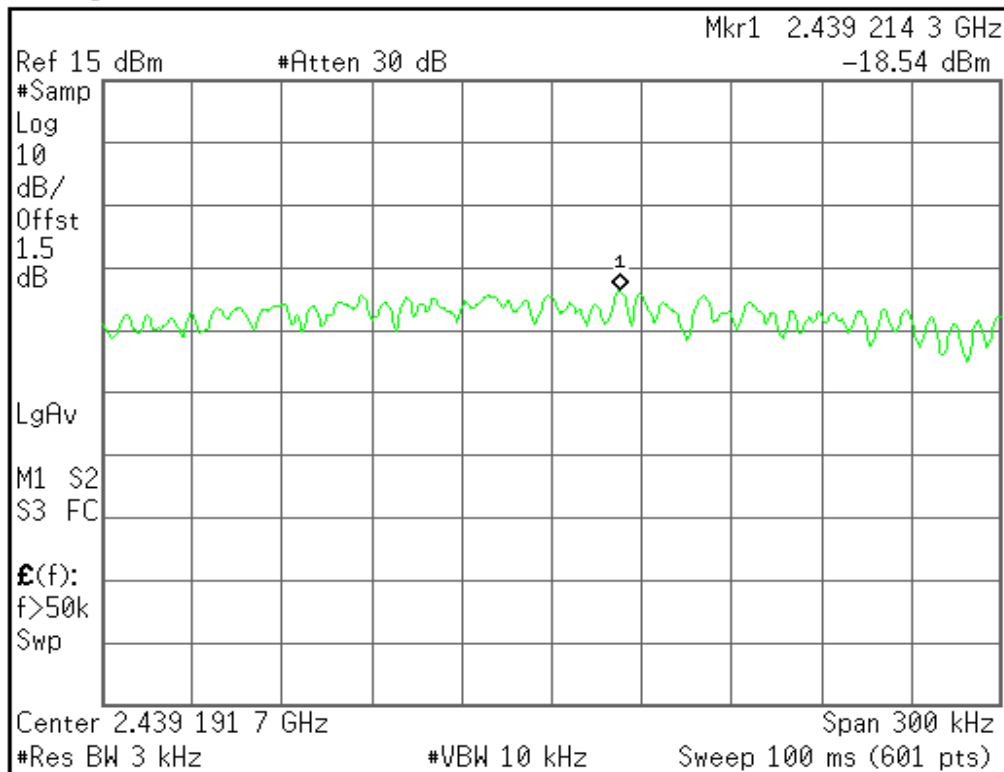

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search


Mkr → CF

More
1 of 2

Copyright 2000-2003 Agilent Technologies

PPSD (CH High)

* Agilent 15:07:02 Aug 2, 2006

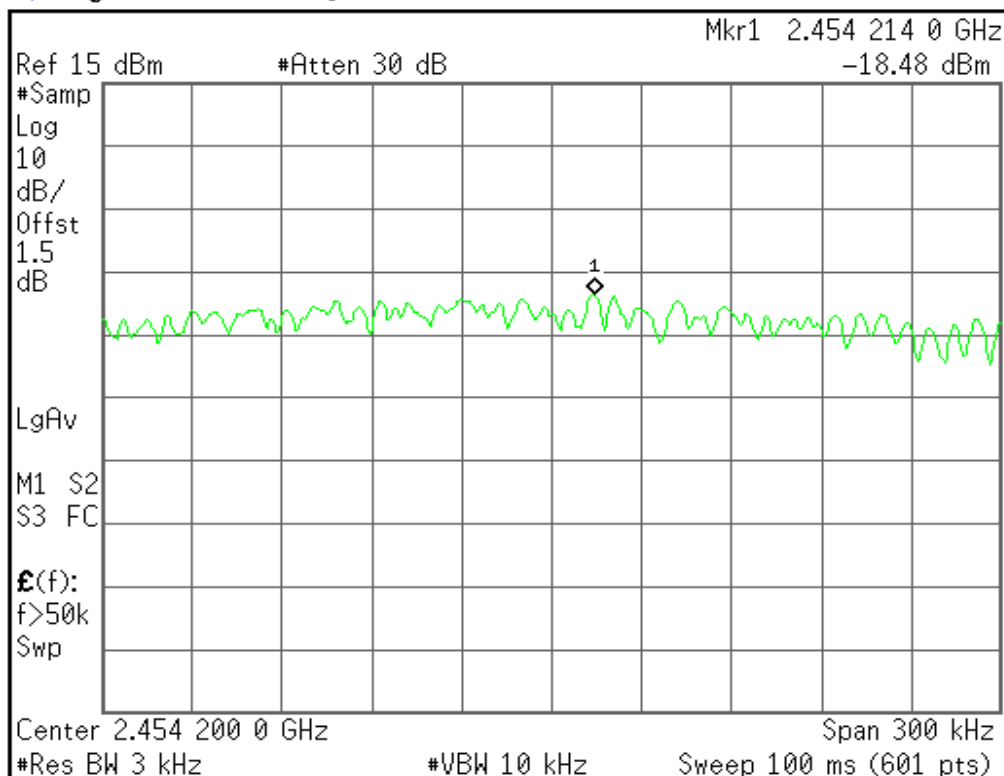

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More
1 of 2

Copyright 2000-2003 Agilent Technologies




7.5 SPURIOUS EMISSIONS

7.5.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS


No non-compliance noted

**Test Plot****IEEE 802.11b mode/Chain 0****CH Low**

* Agilent 16:53:01 Jul 19, 2006

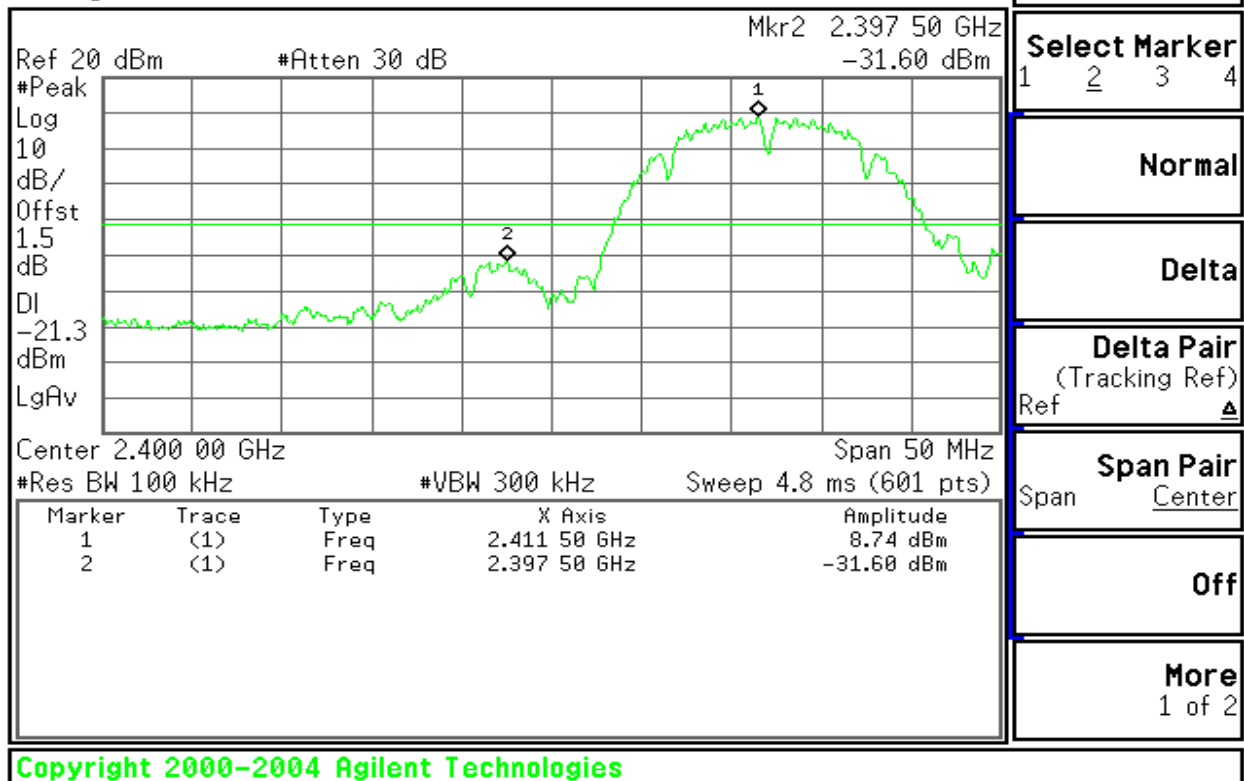


* Agilent 16:54:36 Jul 19, 2006

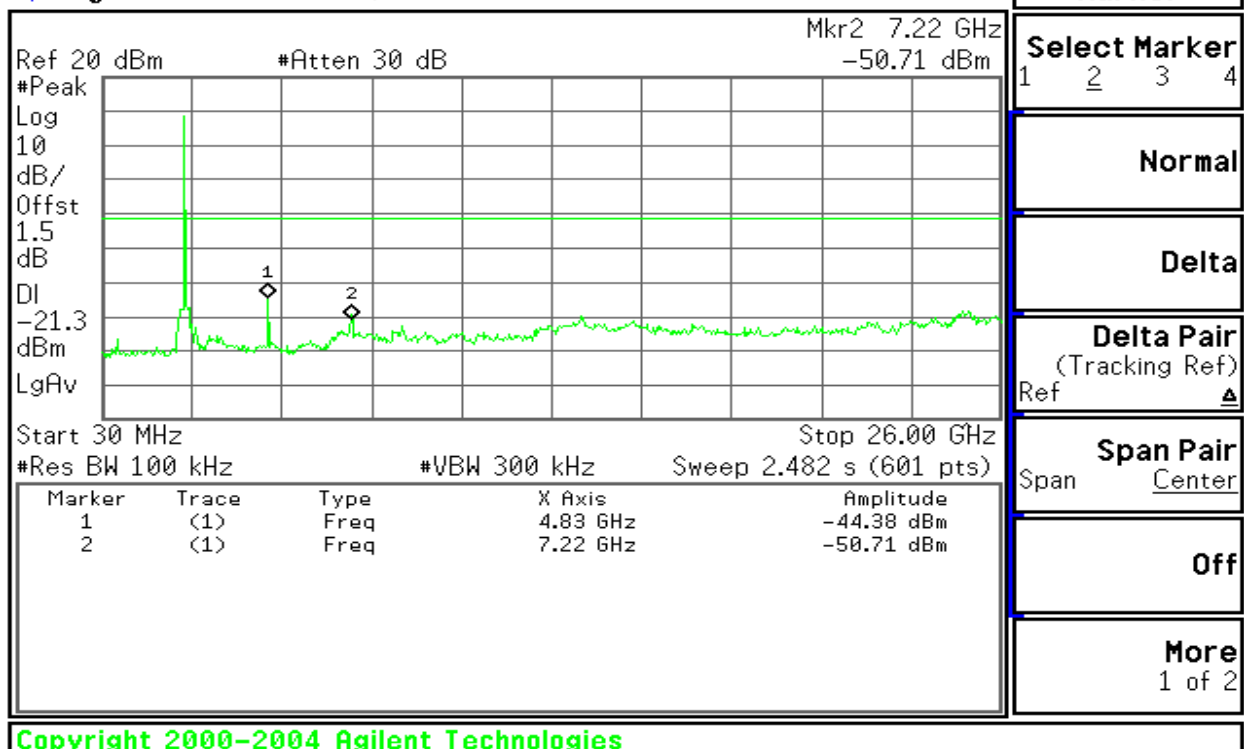



CH Mid

* Agilent 16:56:40 Jul 19, 2006

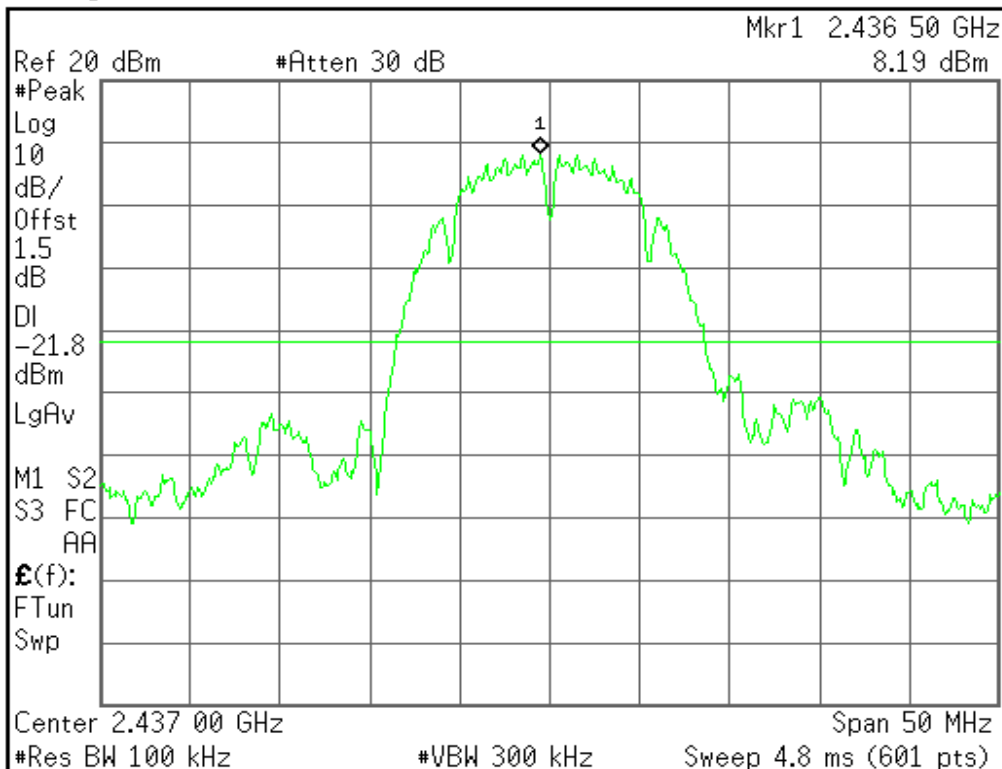

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search


Pk-Pk Search

Mkr → CF

More
1 of 2

File Operation Status, A:\SCREN542.GIF file saved

* Agilent 16:58:14 Jul 19, 2006

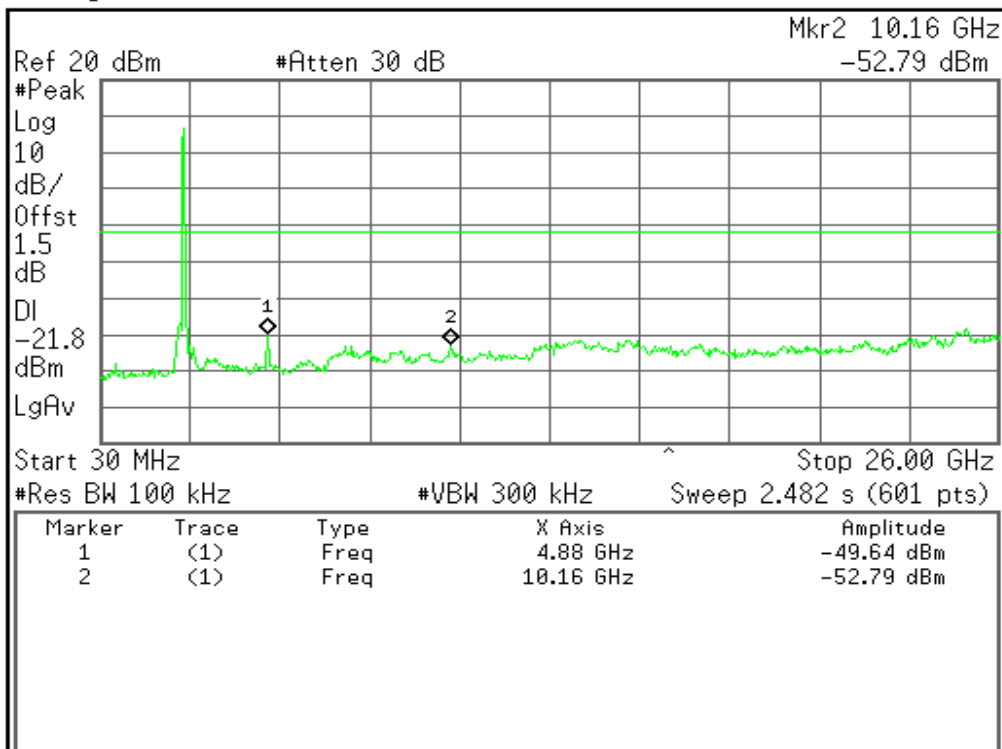

Marker

Select Marker

1 2 3 4

Normal

Delta

Delta Pair
(Tracking Ref)
Ref ▲Span Pair
Span Center

Off


More
1 of 2

Copyright 2000-2004 Agilent Technologies




CH High

* Agilent 17:04:12 Jul 19, 2006

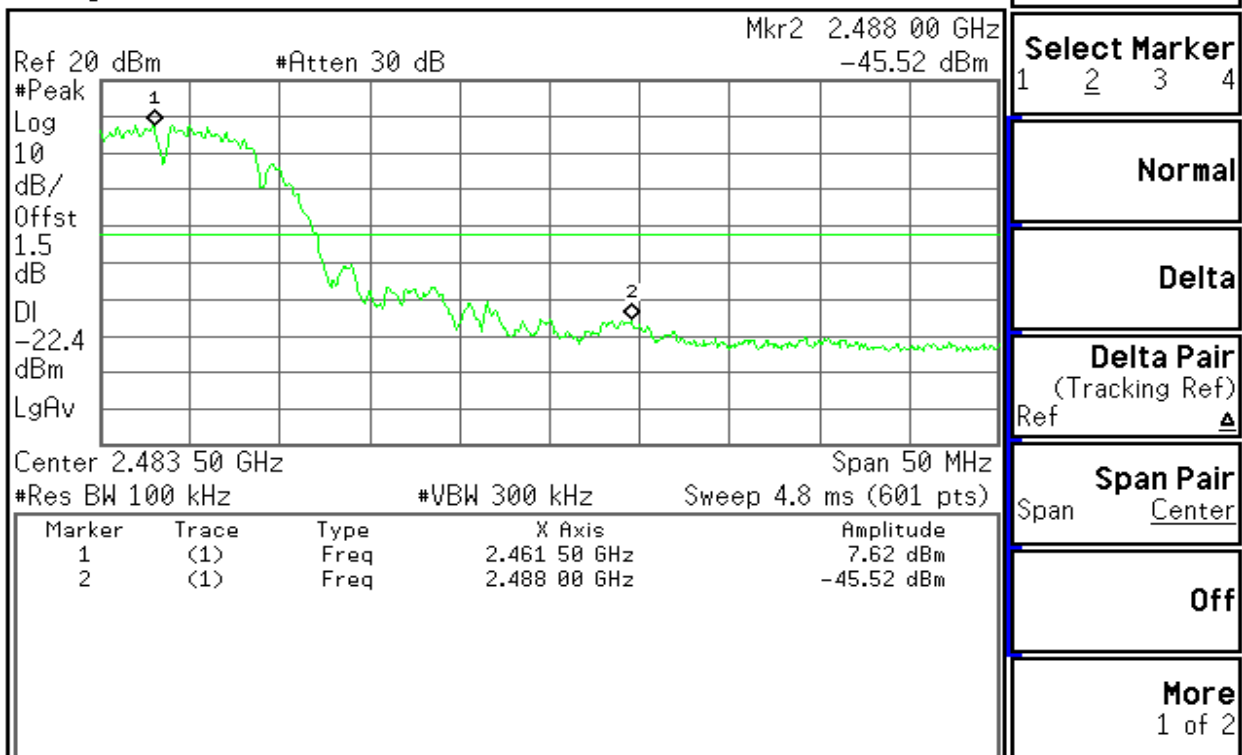

Copyright 2000-2004 Agilent Technologies


* Agilent 17:05:29 Jul 19, 2006

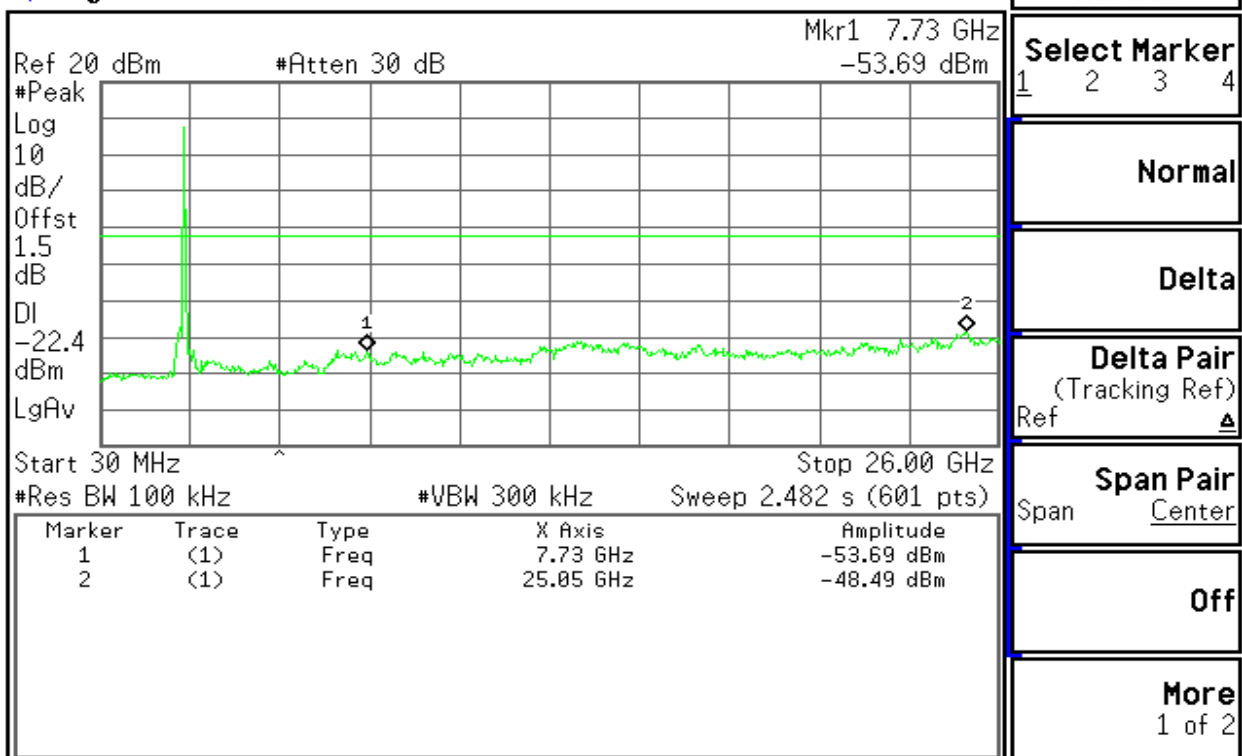


Copyright 2000-2004 Agilent Technologies

**IEEE 802.11b mode/Chain 1****CH Low**

* Agilent 09:55:48 Jul 20, 2006

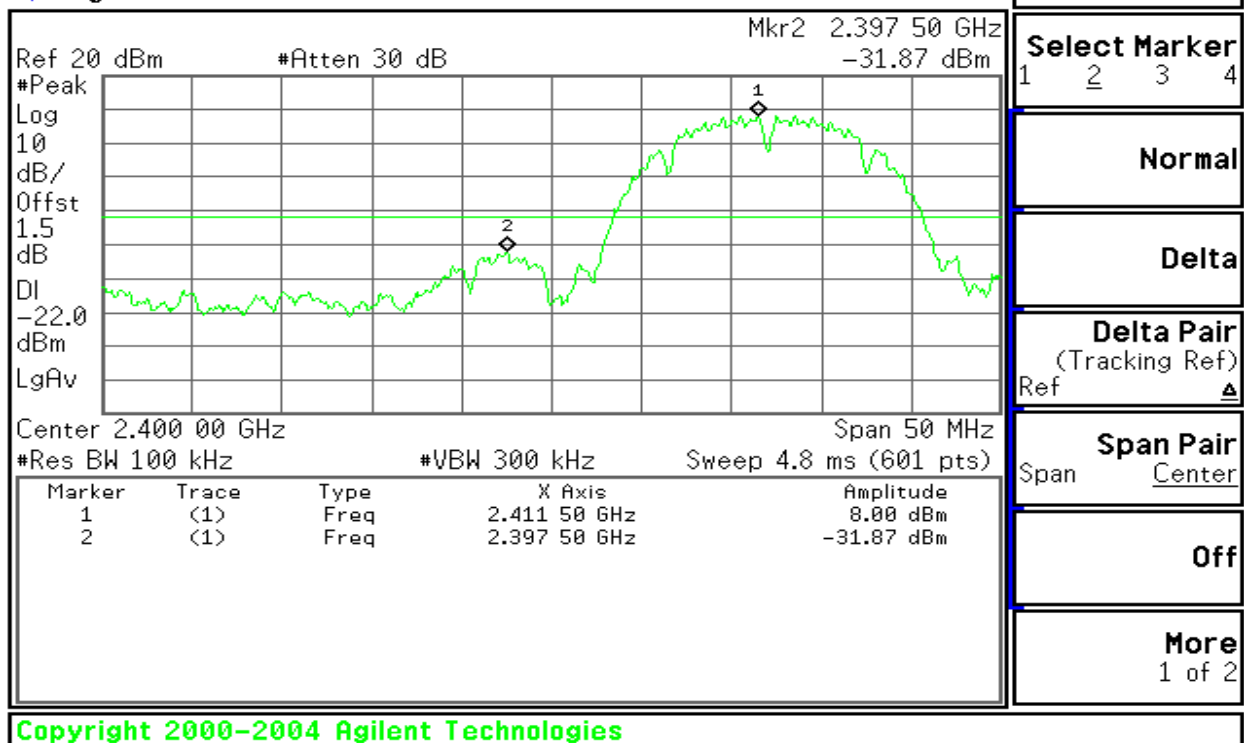


* Agilent 09:57:23 Jul 20, 2006

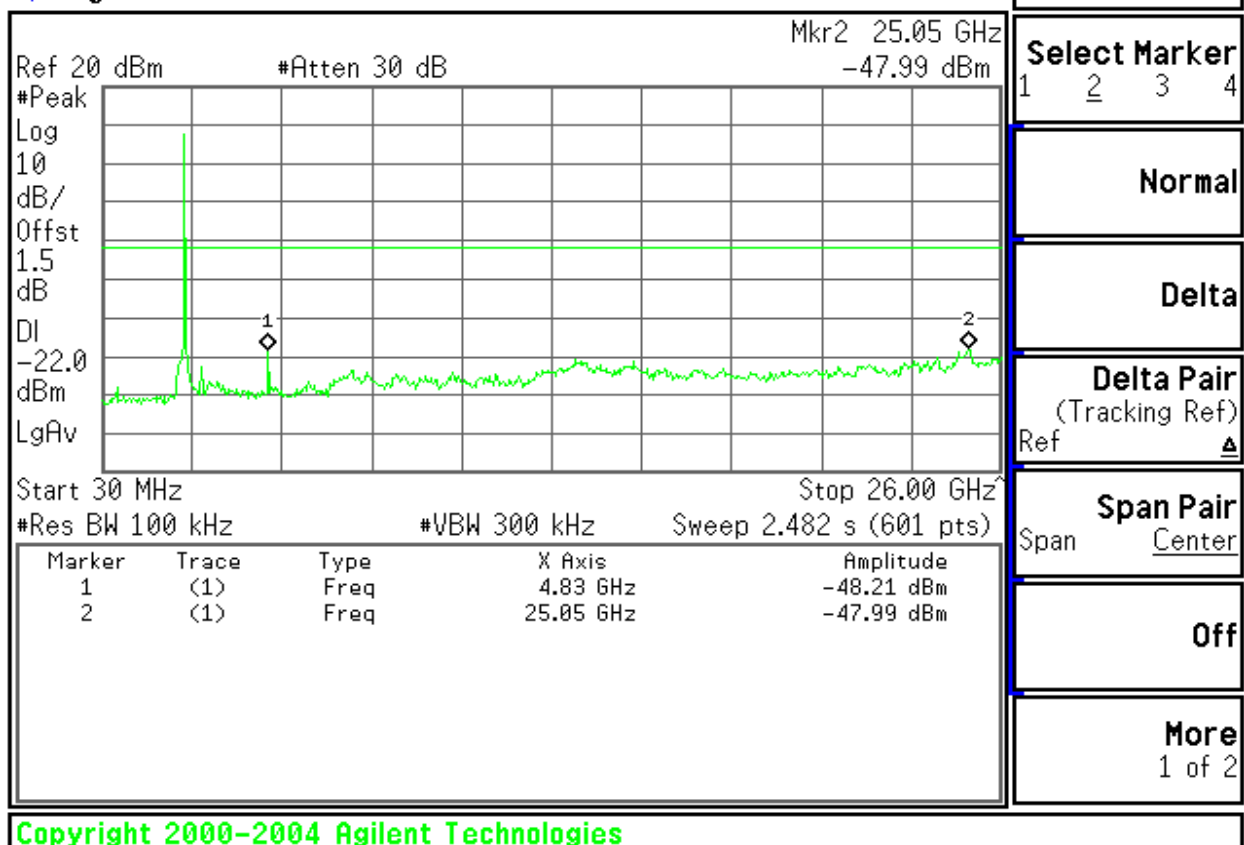



CH Mid

* Agilent 10:03:21 Jul 20, 2006

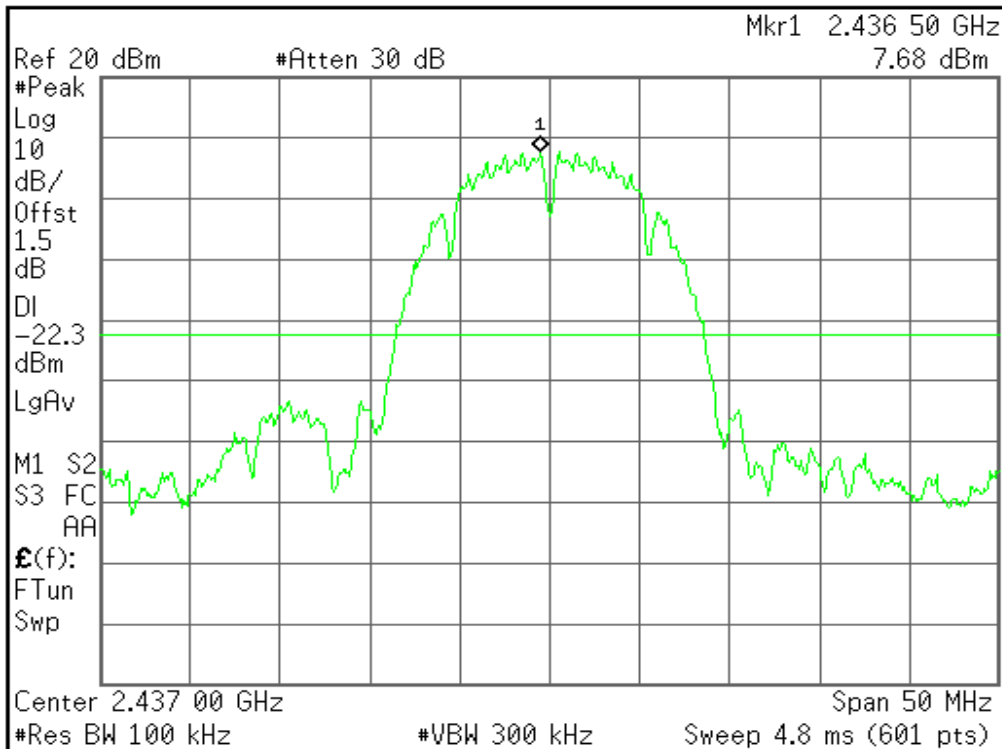

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search


Pk-Pk Search

Mkr → CF

More
1 of 2

Copyright 2000–2004 Agilent Technologies

* Agilent 10:04:23 Jul 20, 2006

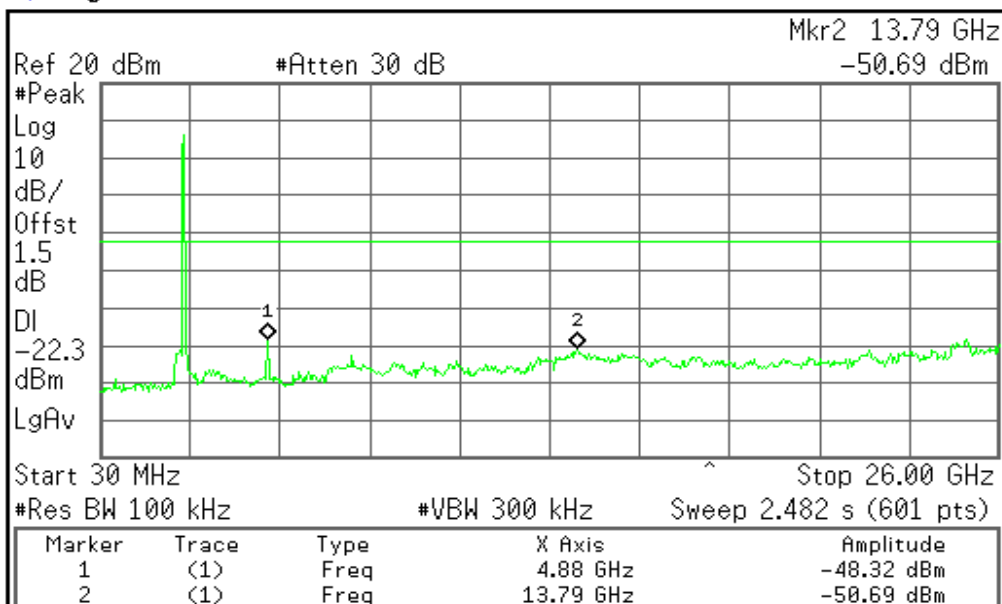

Marker

Select Marker

1 2 3 4

Normal

Delta

Delta Pair
(Tracking Ref)
Ref ▲Span Pair
Span Center

Off


More
1 of 2

Copyright 2000–2004 Agilent Technologies



CH High


* Agilent 10:06:10 Jul 20, 2006

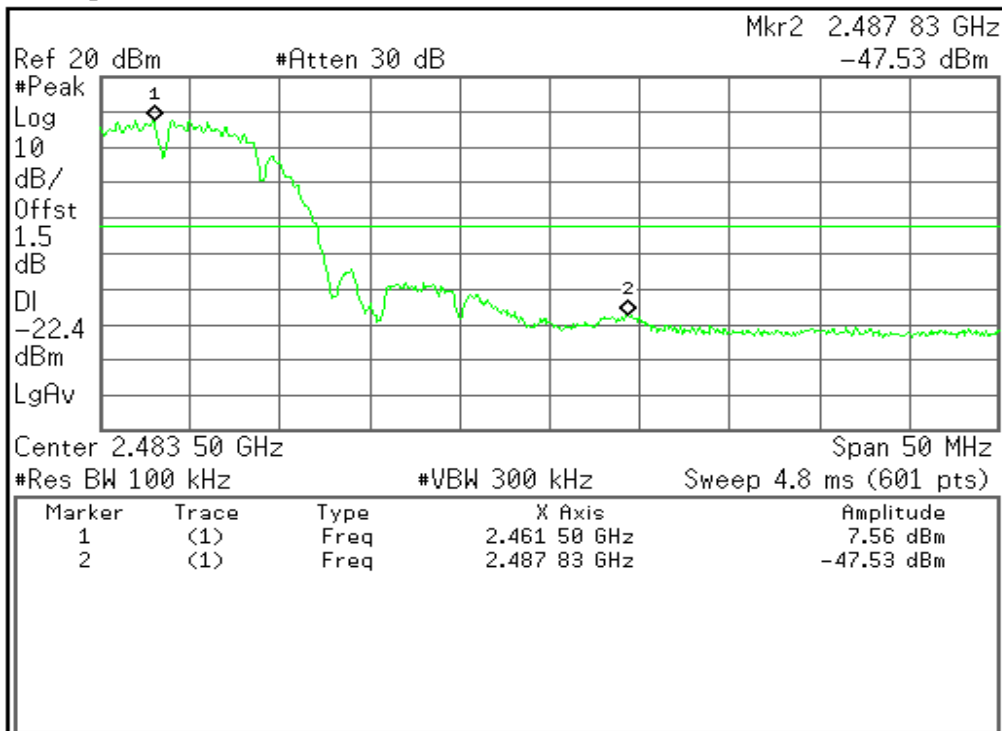

Marker
Select Marker 1 2 3 4
Normal
Delta
Delta Pair (Tracking Ref) Ref
Span Pair Span Center
Off
More 1 of 2

Copyright 2000-2004 Agilent Technologies

* Agilent 10:06:59 Jul 20, 2006

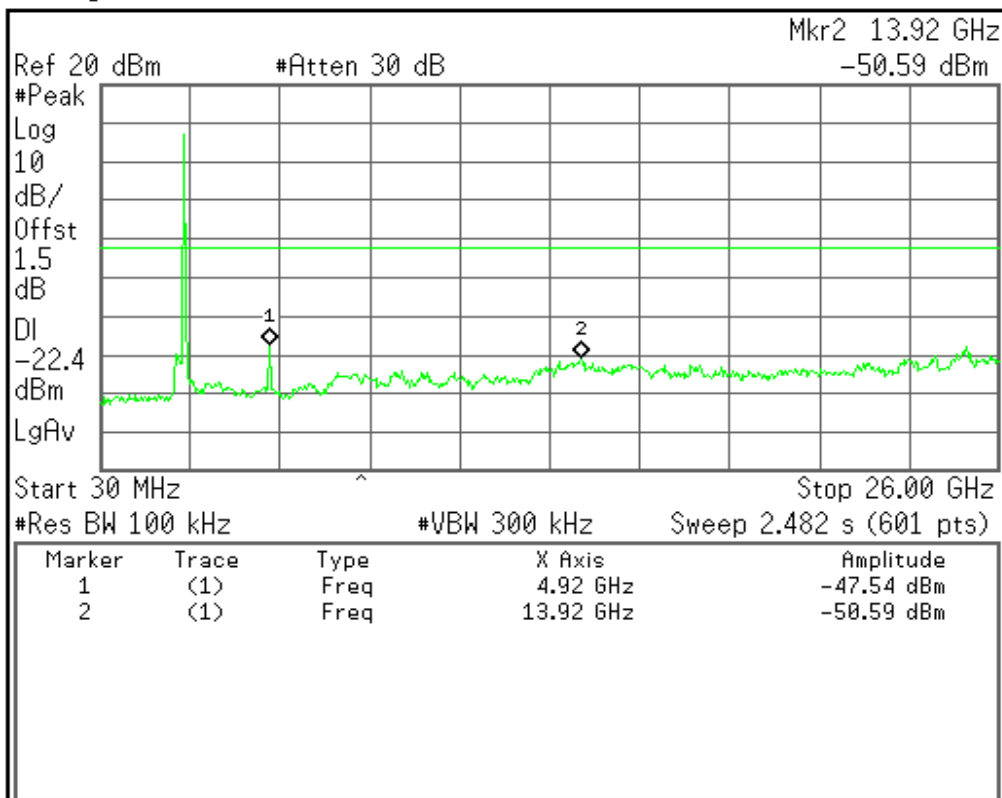


Marker
Select Marker 1 2 3 4
Normal
Delta
Delta Pair (Tracking Ref) Ref
Span Pair Span Center
Off
More 1 of 2


Copyright 2000-2004 Agilent Technologies

**IEEE 802.11g 20M mode/Chain 0****CH Low**

* Agilent 17:09:02 Jul 19, 2006

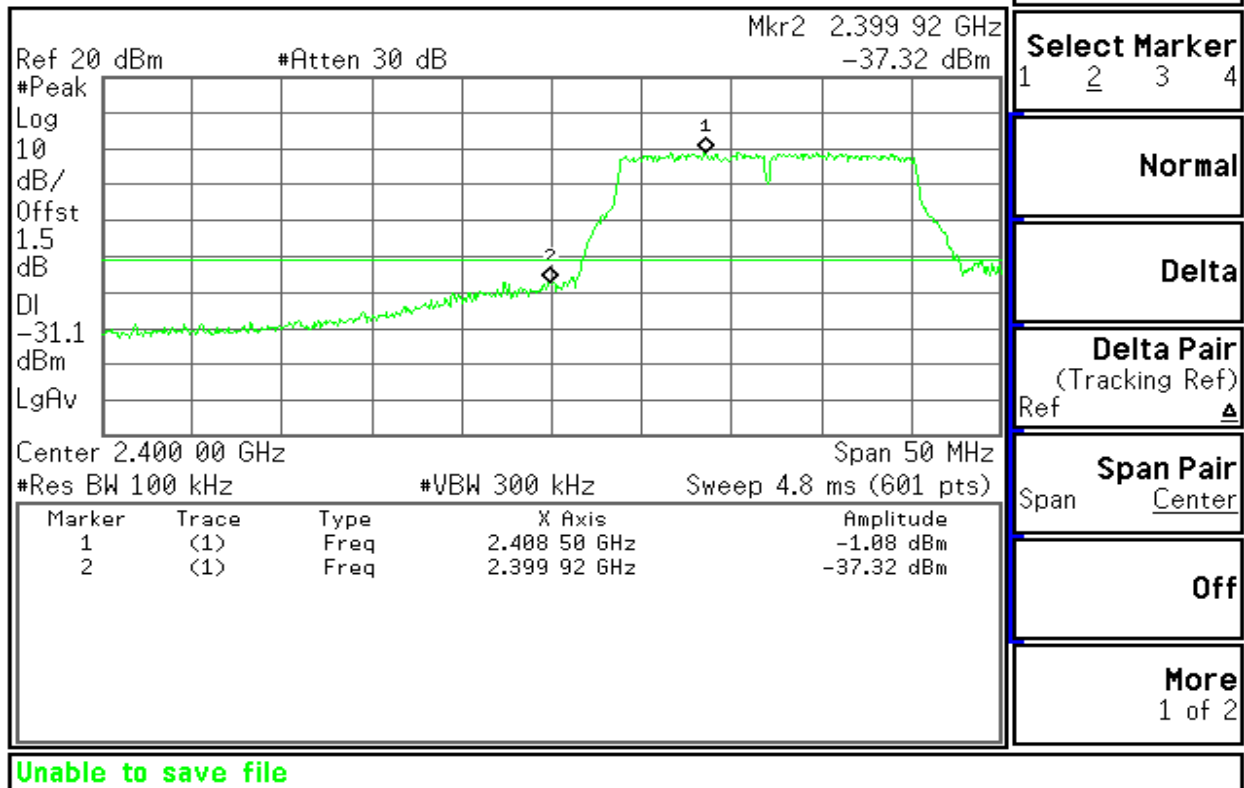


* Agilent 17:09:48 Jul 19, 2006

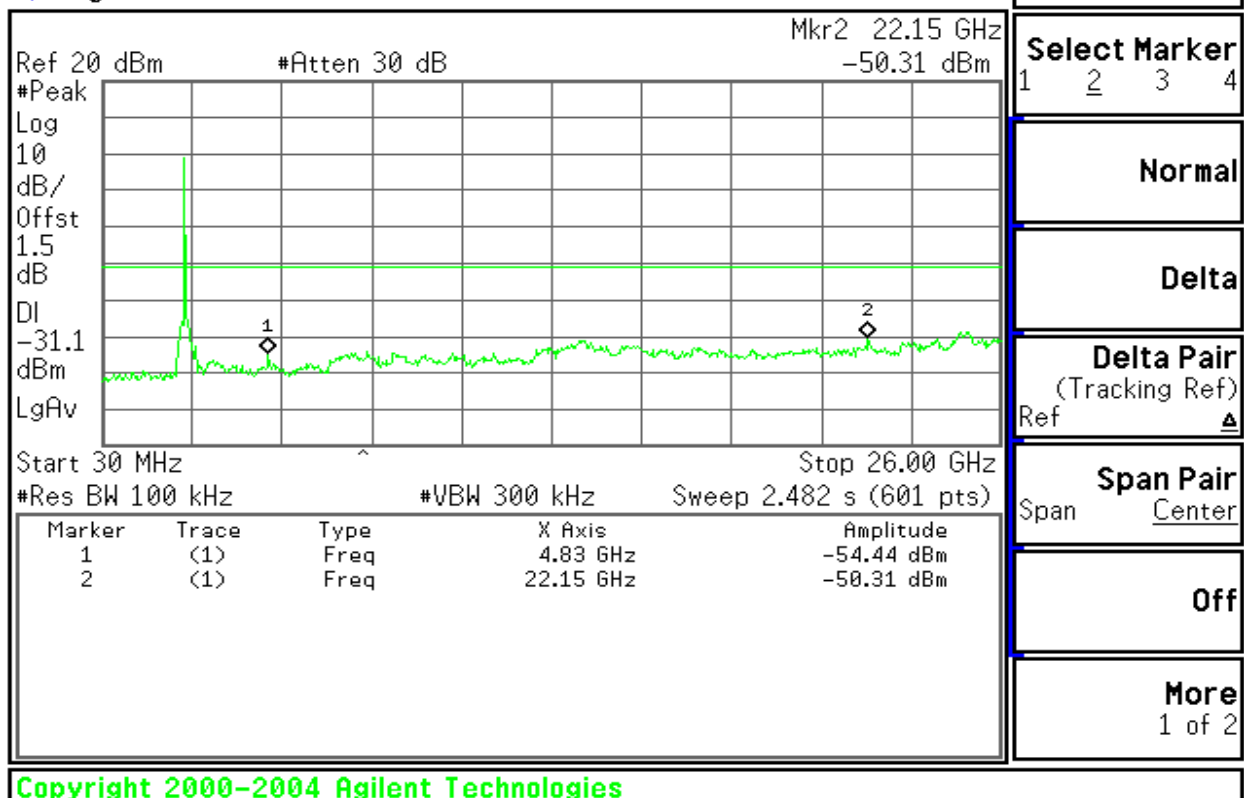



CH Mid

Agilent 17:13:42 Jul 19, 2006

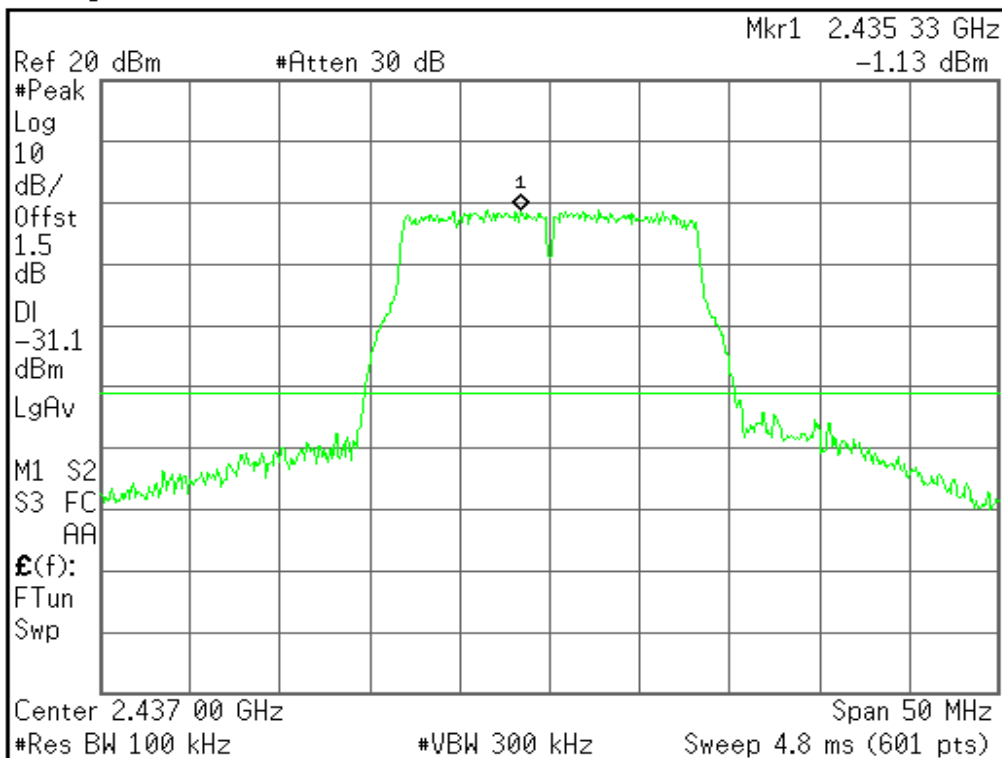

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search


Pk-Pk Search

Mkr → CF

More
1 of 2

Copyright 2000–2004 Agilent Technologies

Agilent 17:15:33 Jul 19, 2006

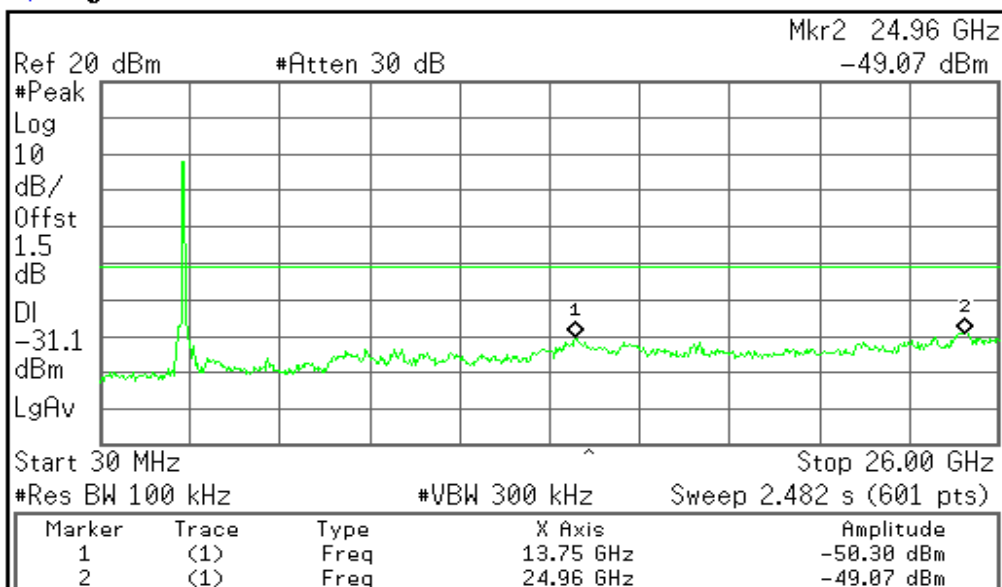

Marker

Select Marker

1 2 3 4

Normal

Delta

Delta Pair
(Tracking Ref)
Ref ▲Span Pair
Span Center

Off


More
1 of 2

Copyright 2000–2004 Agilent Technologies




CH High

* Agilent 17:17:50 Jul 19, 2006

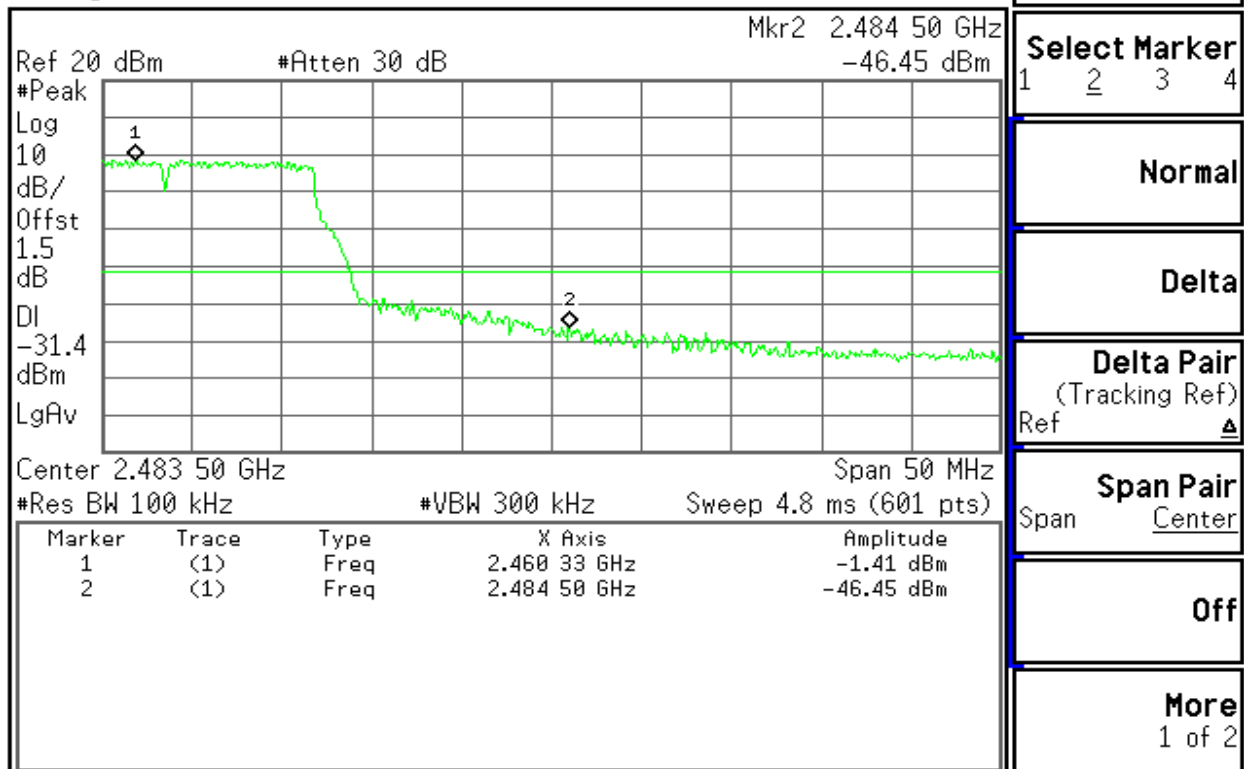

Copyright 2000-2004 Agilent Technologies


* Agilent 17:18:33 Jul 19, 2006

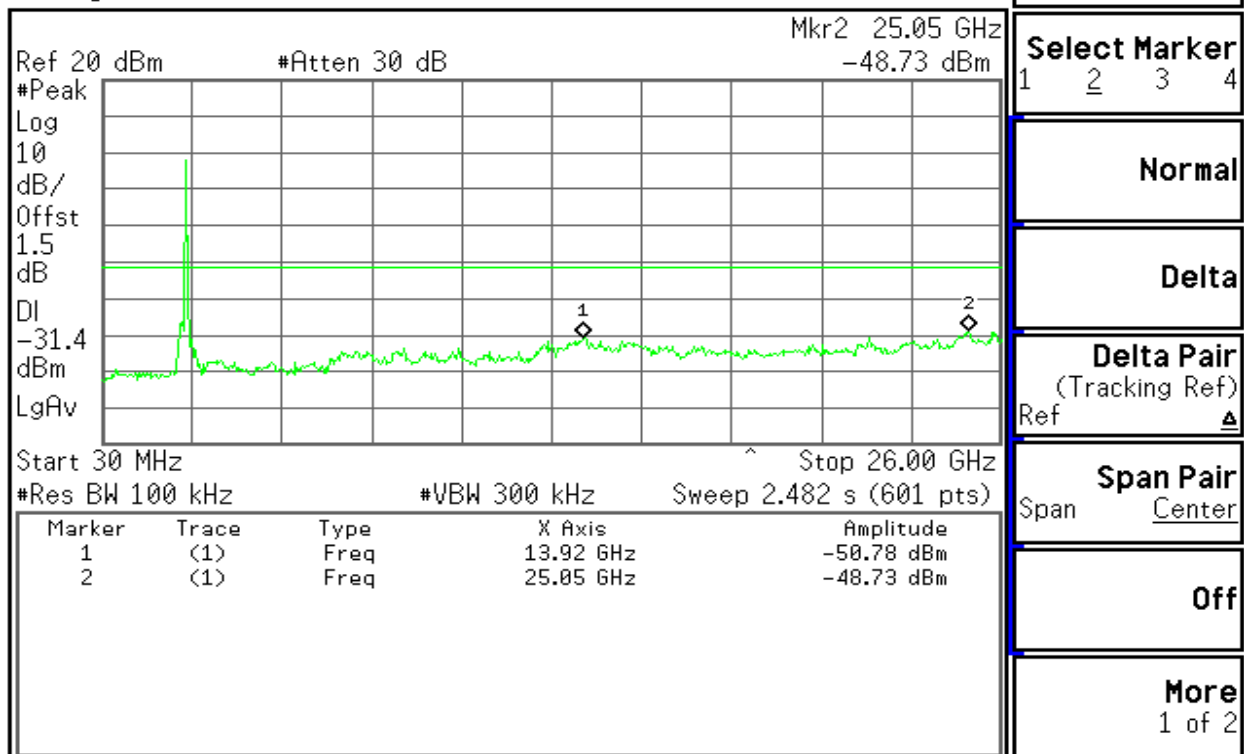

Copyright 2000-2004 Agilent Technologies


**IEEE 802.11g 20M mode/Chain 1****CH Low**

* Agilent 10:11:58 Jul 20, 2006

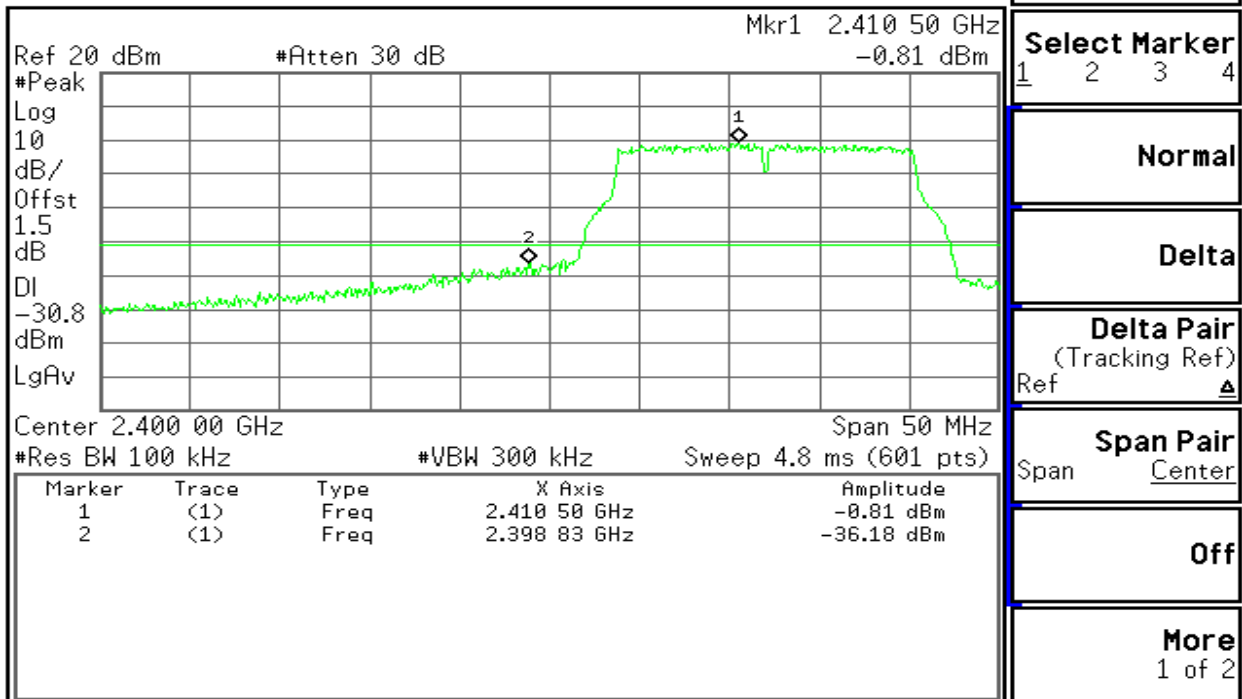

Copyright 2000-2004 Agilent Technologies

* Agilent 10:12:44 Jul 20, 2006

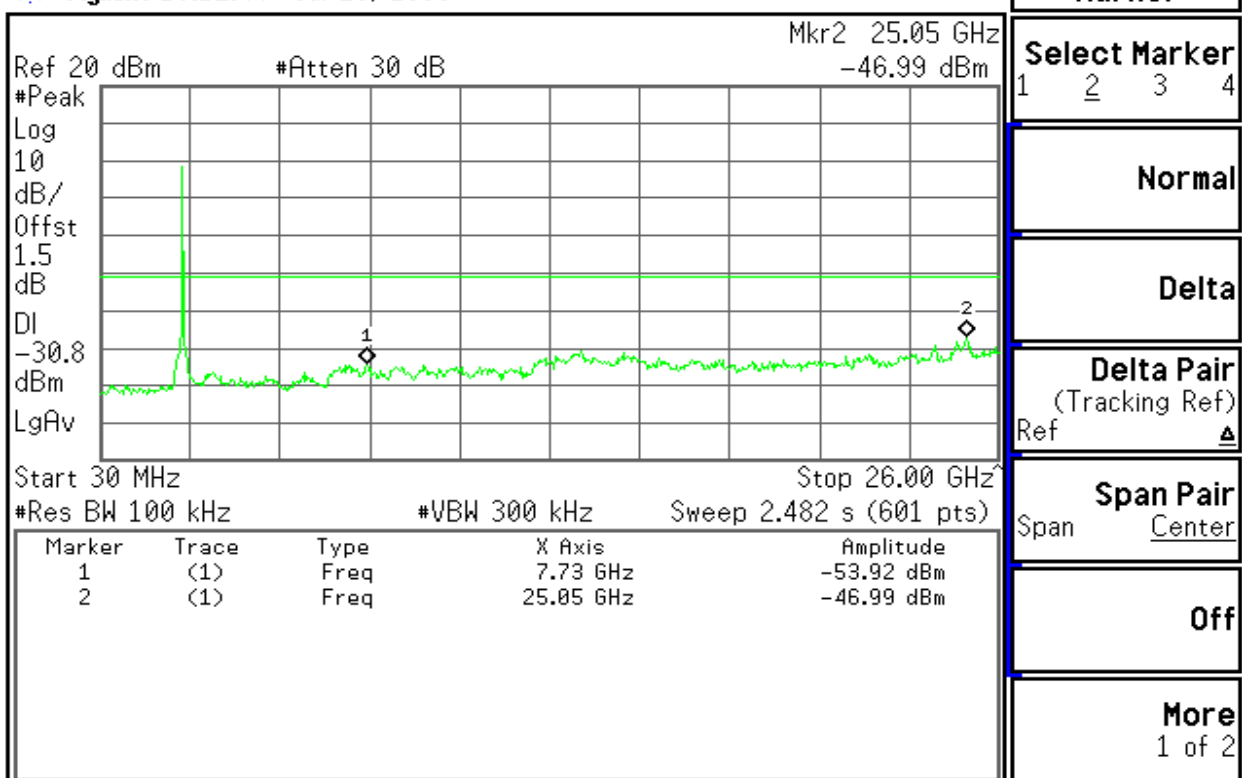


Copyright 2000-2004 Agilent Technologies



CH Mid

Agilent 10:14:01 Jul 20, 2006

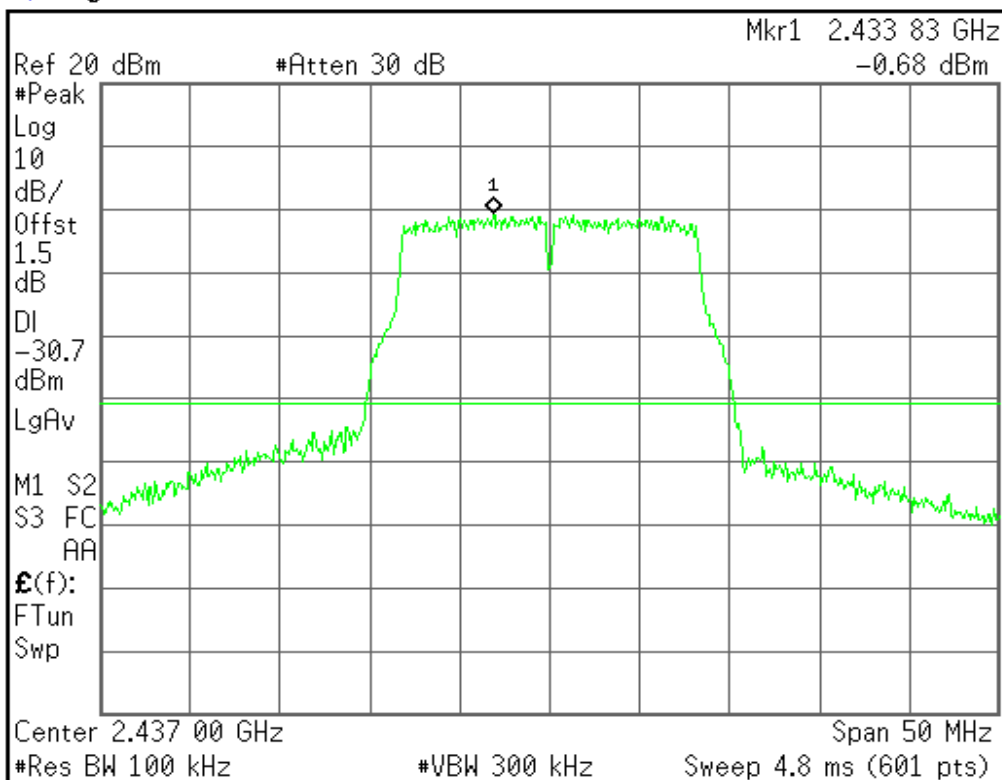

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search


Pk-Pk Search

Mkr → CF

More
1 of 2

Copyright 2000–2004 Agilent Technologies

Agilent 10:14:53 Jul 20, 2006

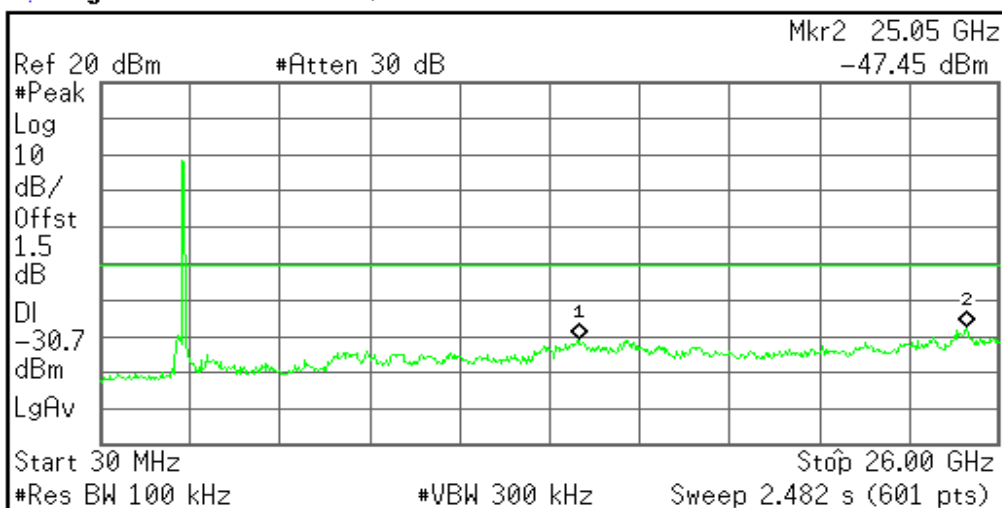

Marker

Select Marker

1 2 3 4

Normal

Delta

Delta Pair
(Tracking Ref)
Ref ▲Span Pair
Span Center

Off

More
1 of 2


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	13.84 GHz	-50.72 dBm
2	(1)	Freq	25.05 GHz	-47.45 dBm

Copyright 2000–2004 Agilent Technologies




CH High

* Agilent 10:15:54 Jul 20, 2006

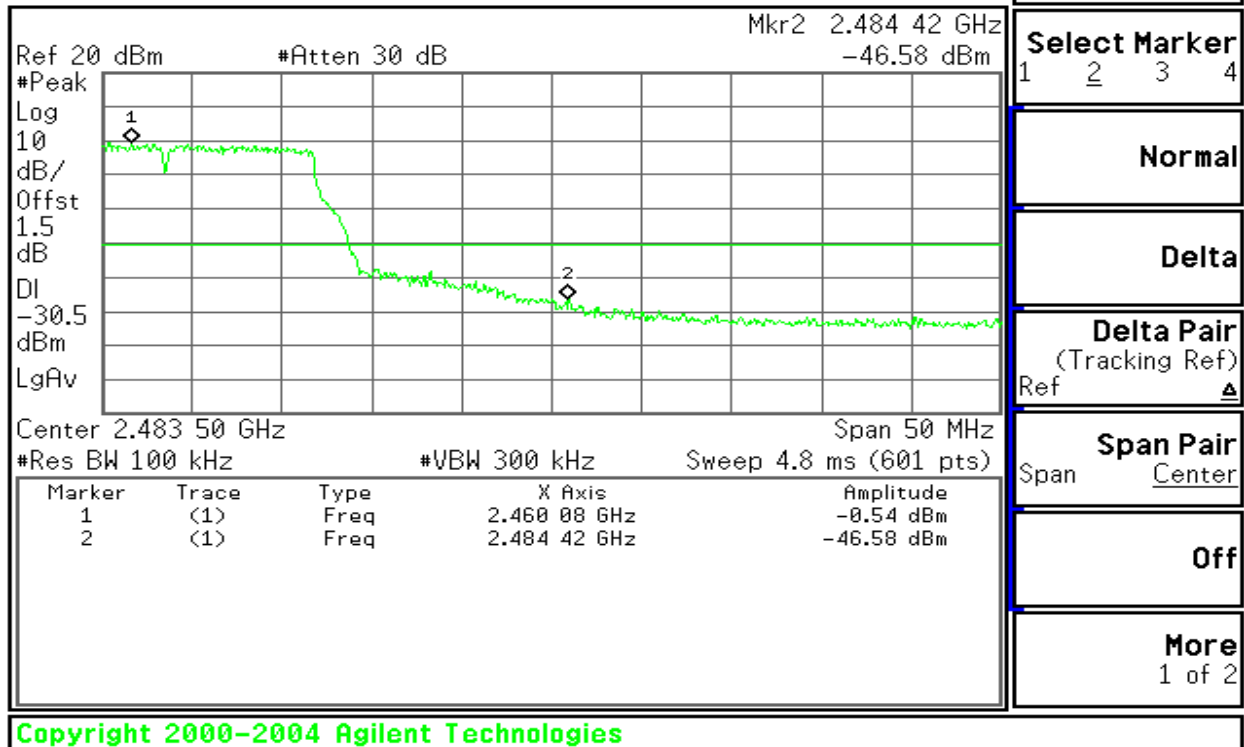


* Agilent 10:16:44 Jul 20, 2006

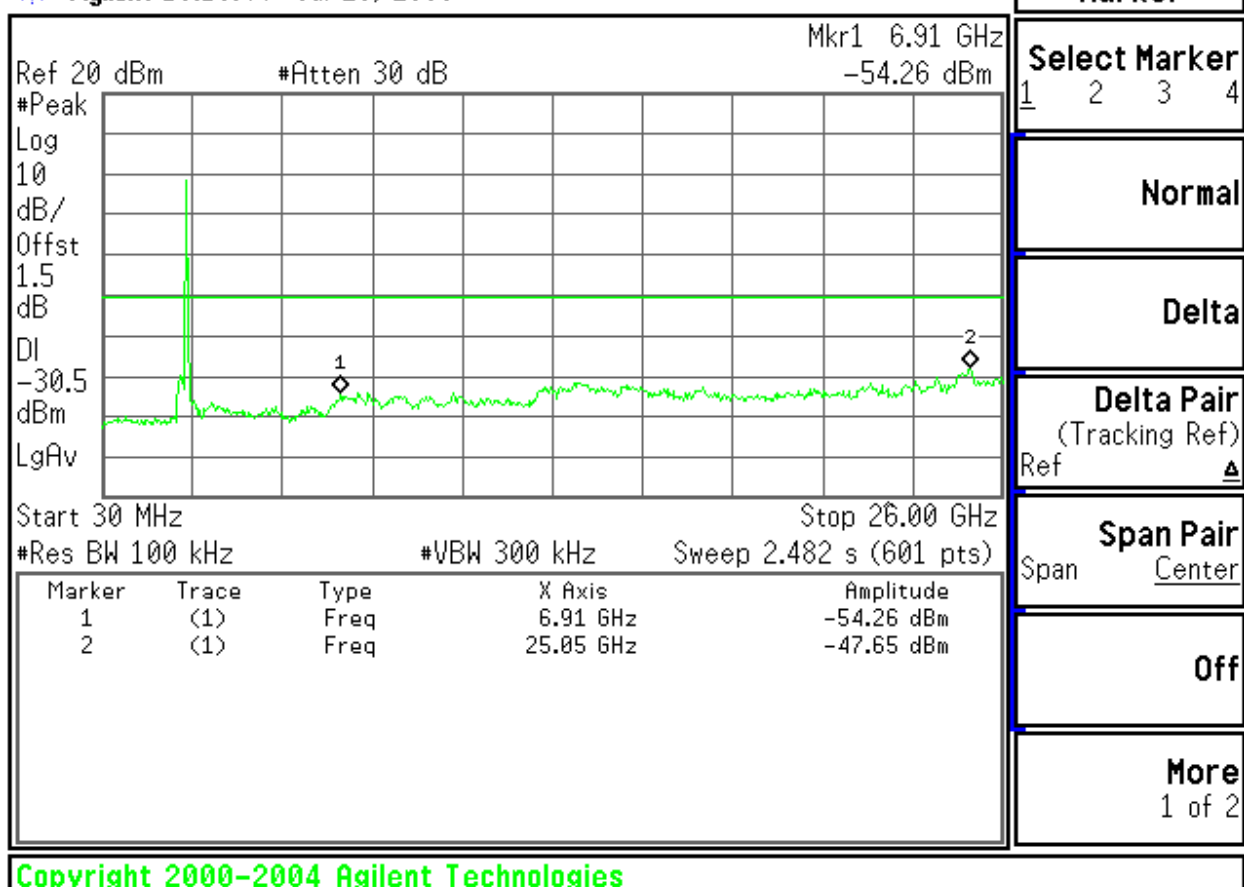


**IEEE 802.11g 40M mode/Chain 0****CH Low**

* Agilent 16:17:39 Aug 3, 2006

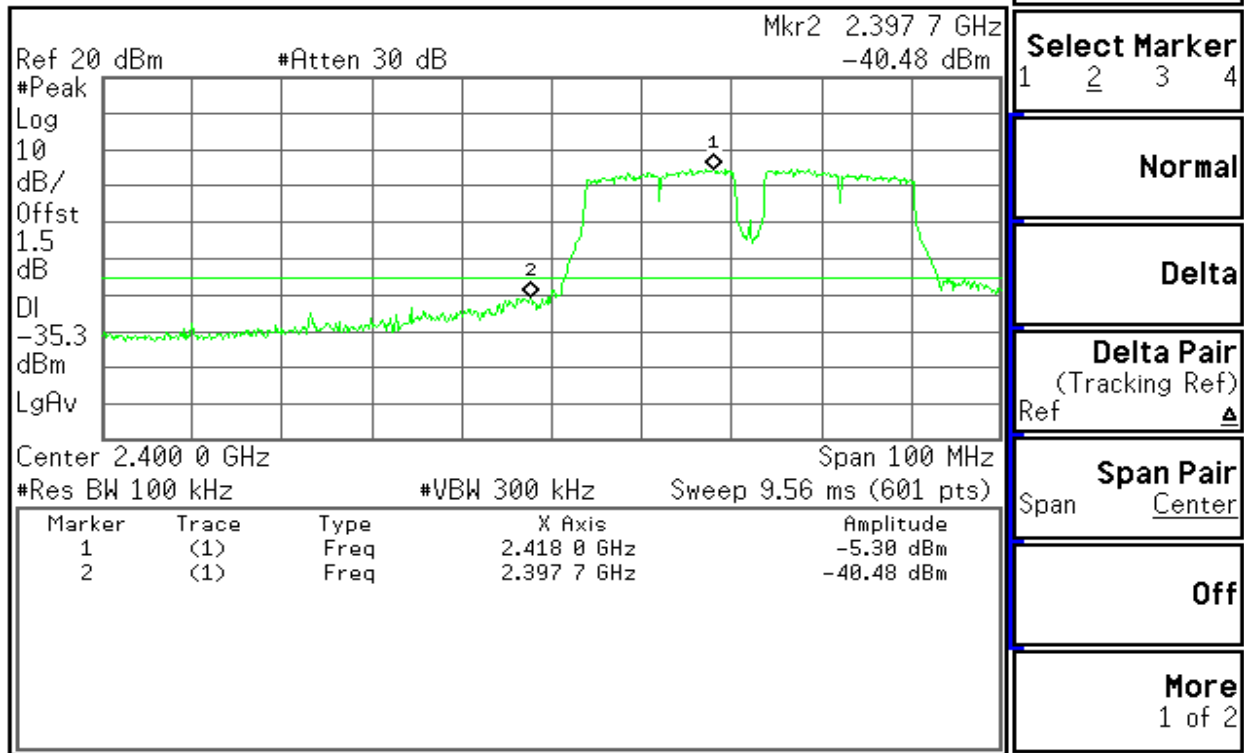

Copyright 2000-2004 Agilent Technologies

* Agilent 16:23:14 Aug 3, 2006

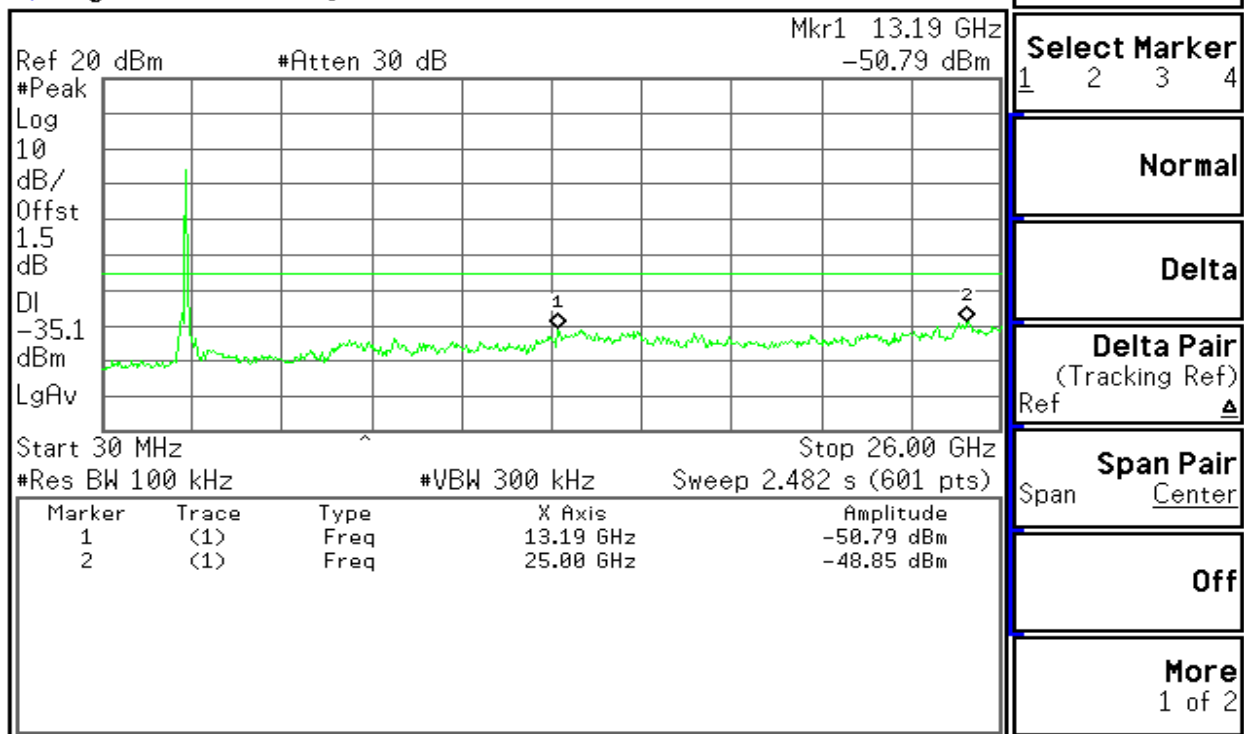


Copyright 2000-2004 Agilent Technologies




CH Mid

* Agilent 16:20:01 Aug 3, 2006

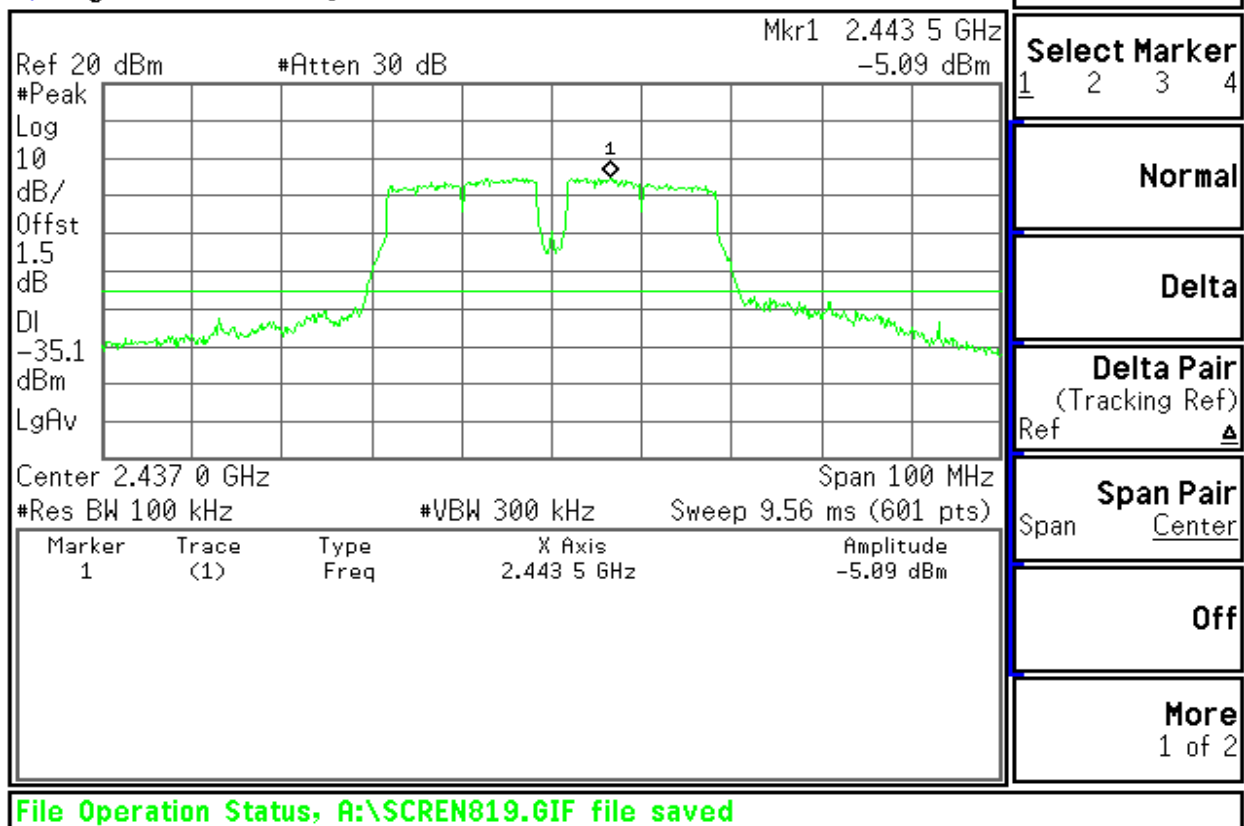


* Agilent 16:18:38 Aug 3, 2006

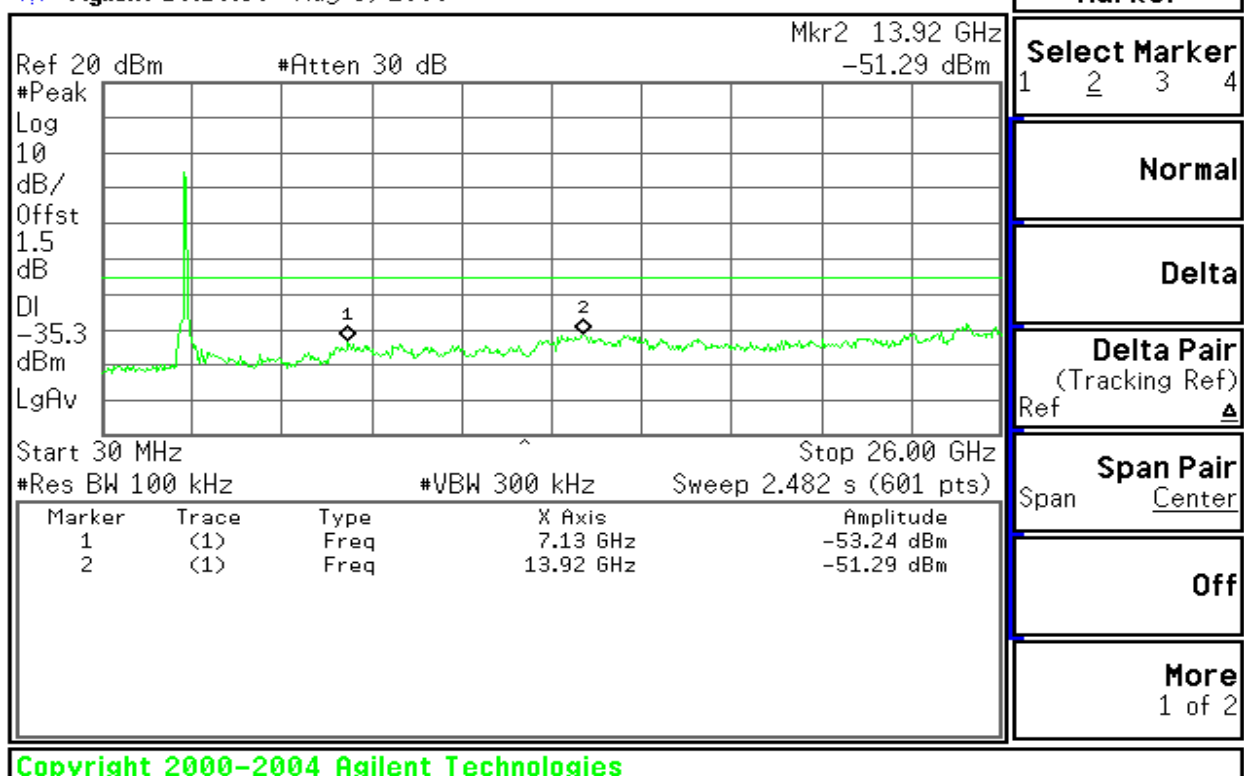




CH High

* Agilent 16:22:29 Aug 3, 2006

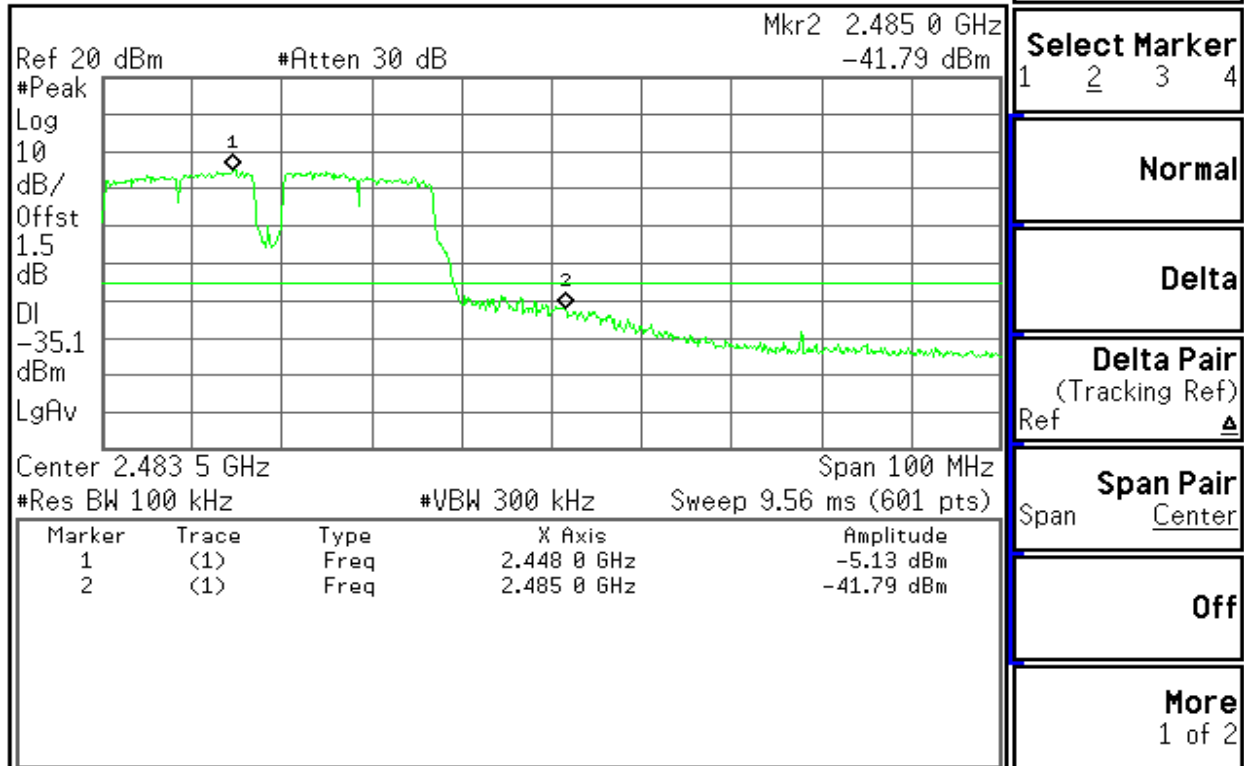

Copyright 2000-2004 Agilent Technologies


* Agilent 16:20:51 Aug 3, 2006

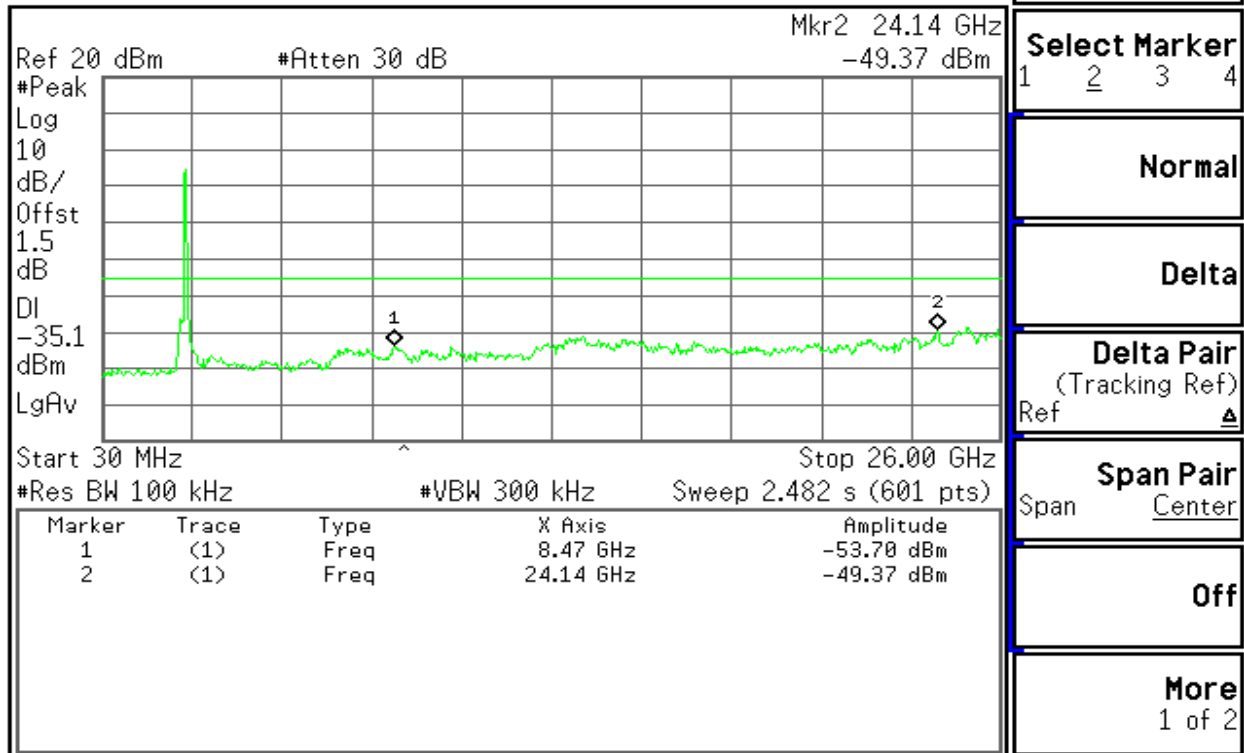


Copyright 2000-2004 Agilent Technologies

**IEEE 802.11g 40M mode/Chain 1****CH Low**

* Agilent 16:31:16 Aug 3, 2006

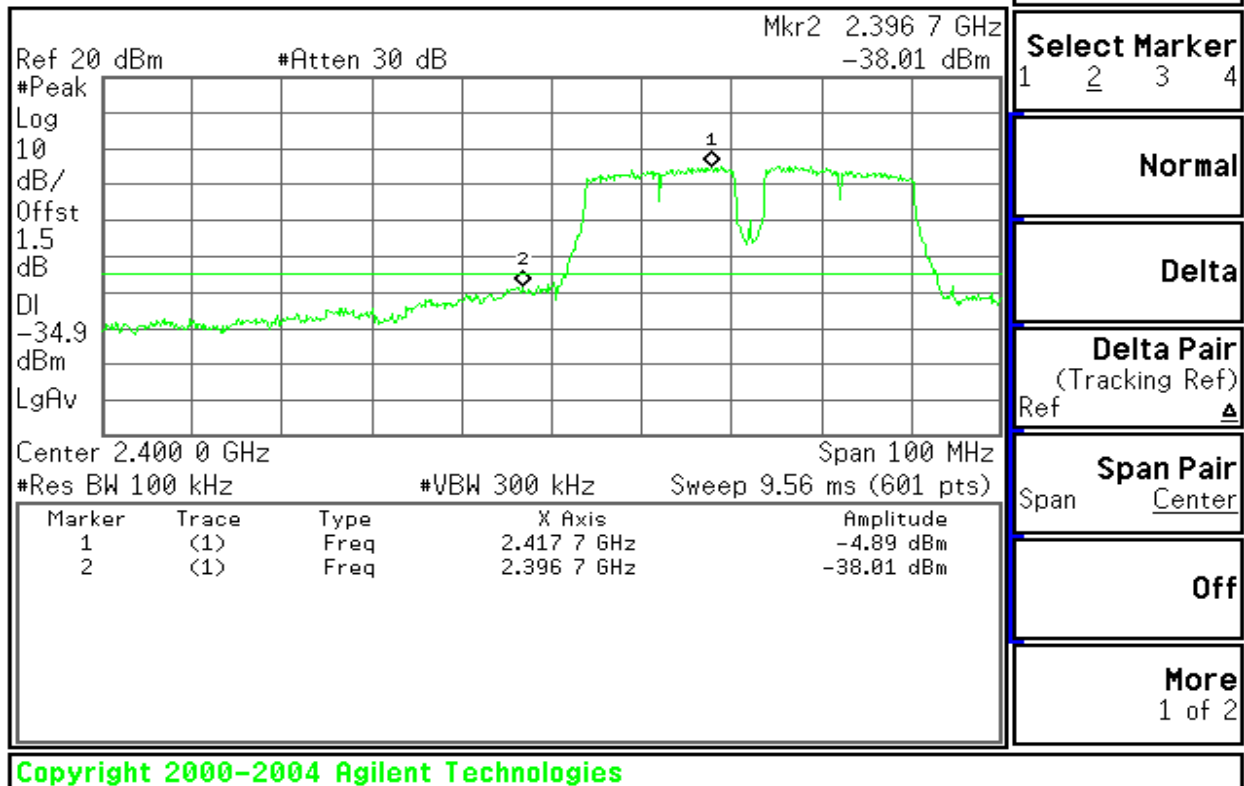


* Agilent 16:31:56 Aug 3, 2006

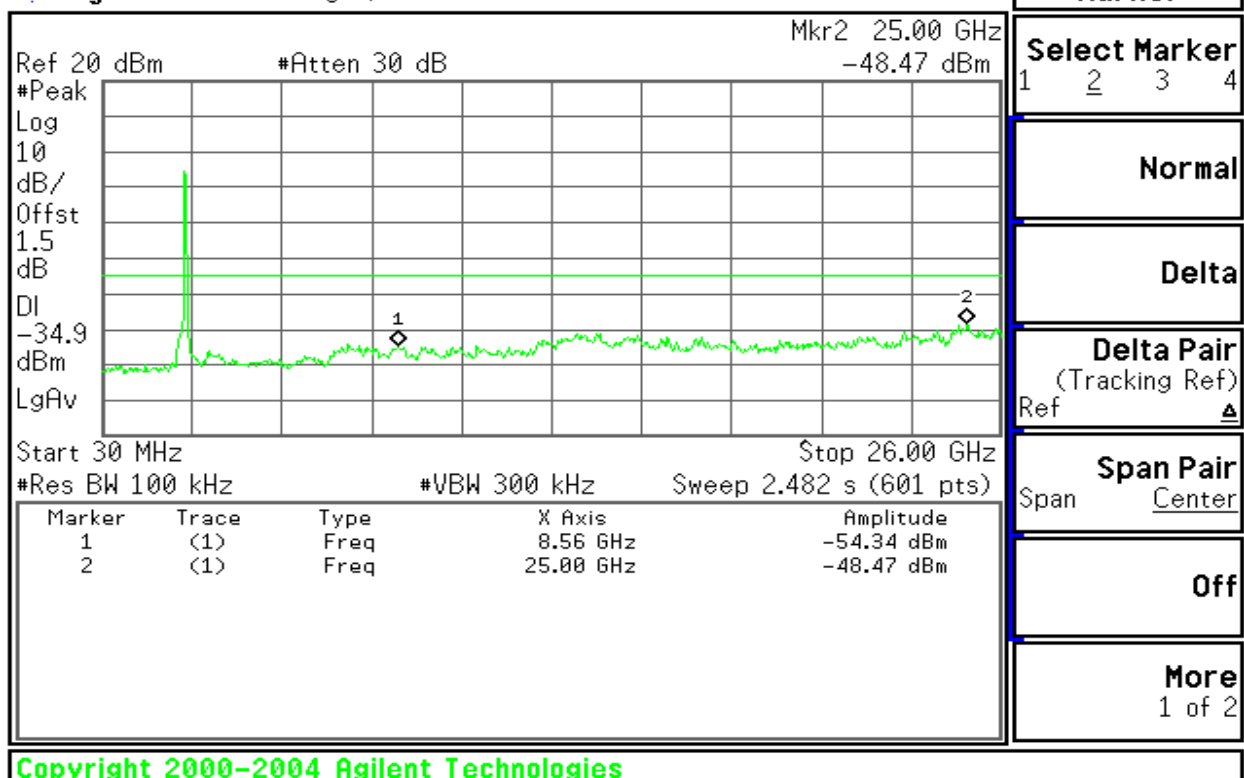




CH Mid

* Agilent 16:29:12 Aug 3, 2006

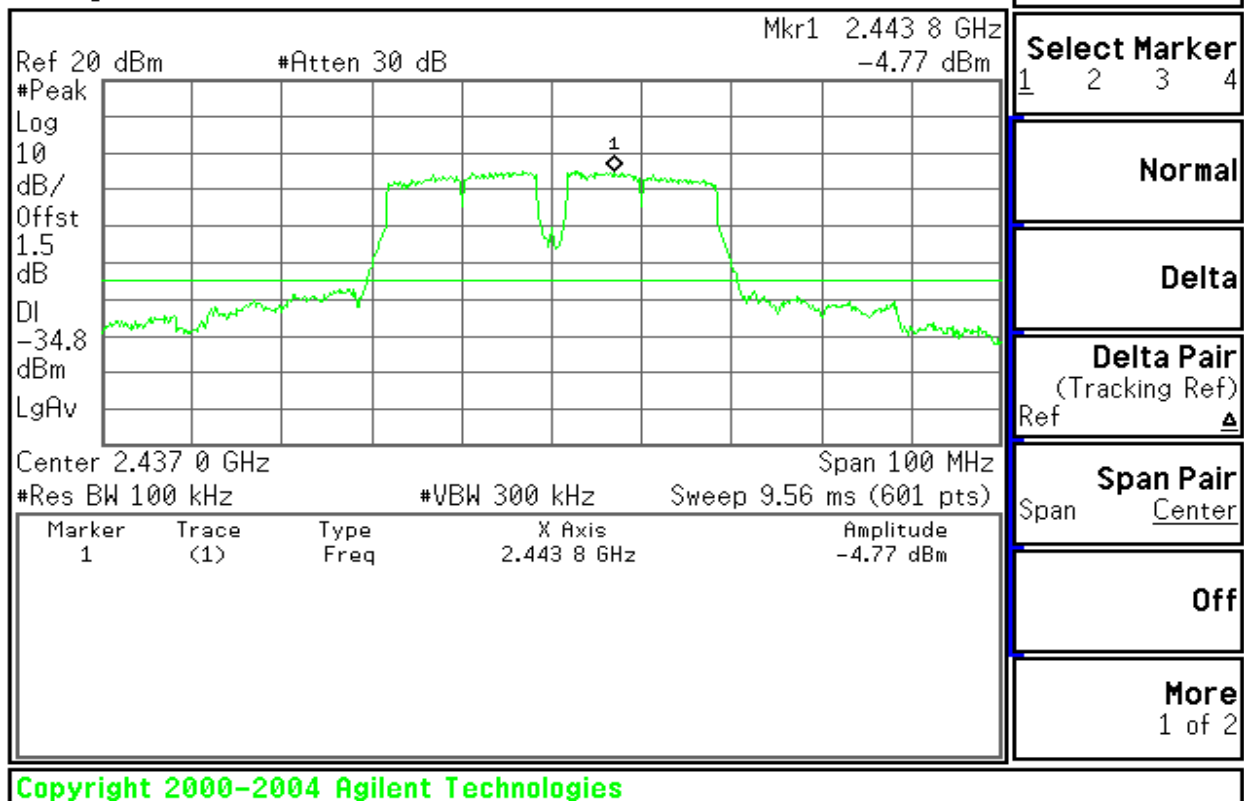


* Agilent 16:29:45 Aug 3, 2006

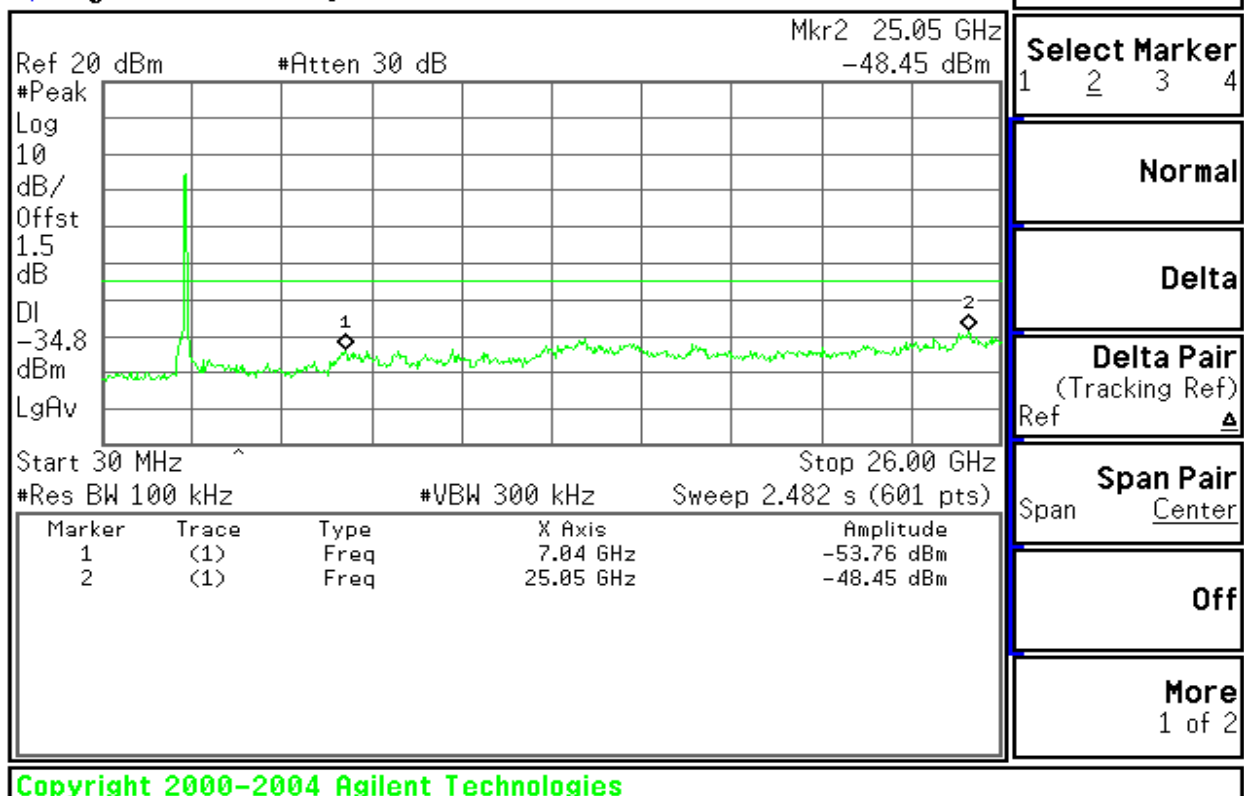




CH High

* Agilent 16:27:21 Aug 3, 2006

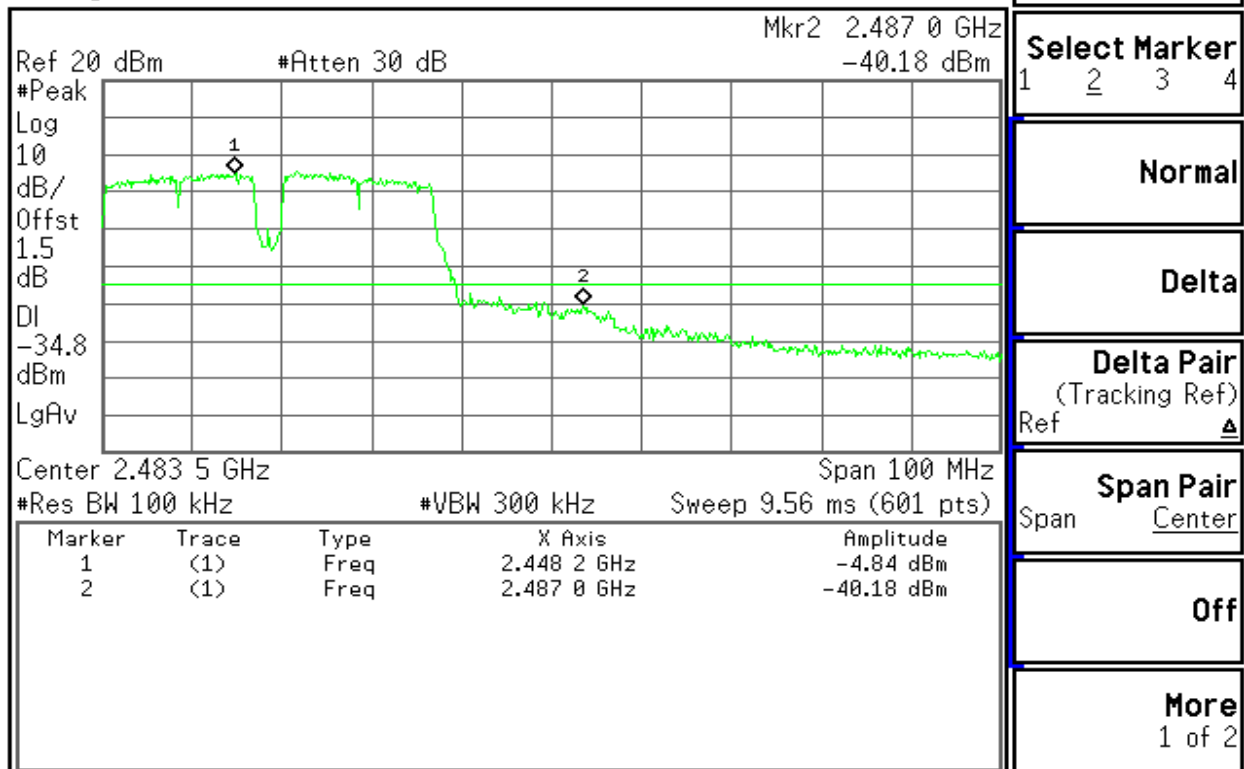

Copyright 2000-2004 Agilent Technologies

* Agilent 16:28:10 Aug 3, 2006

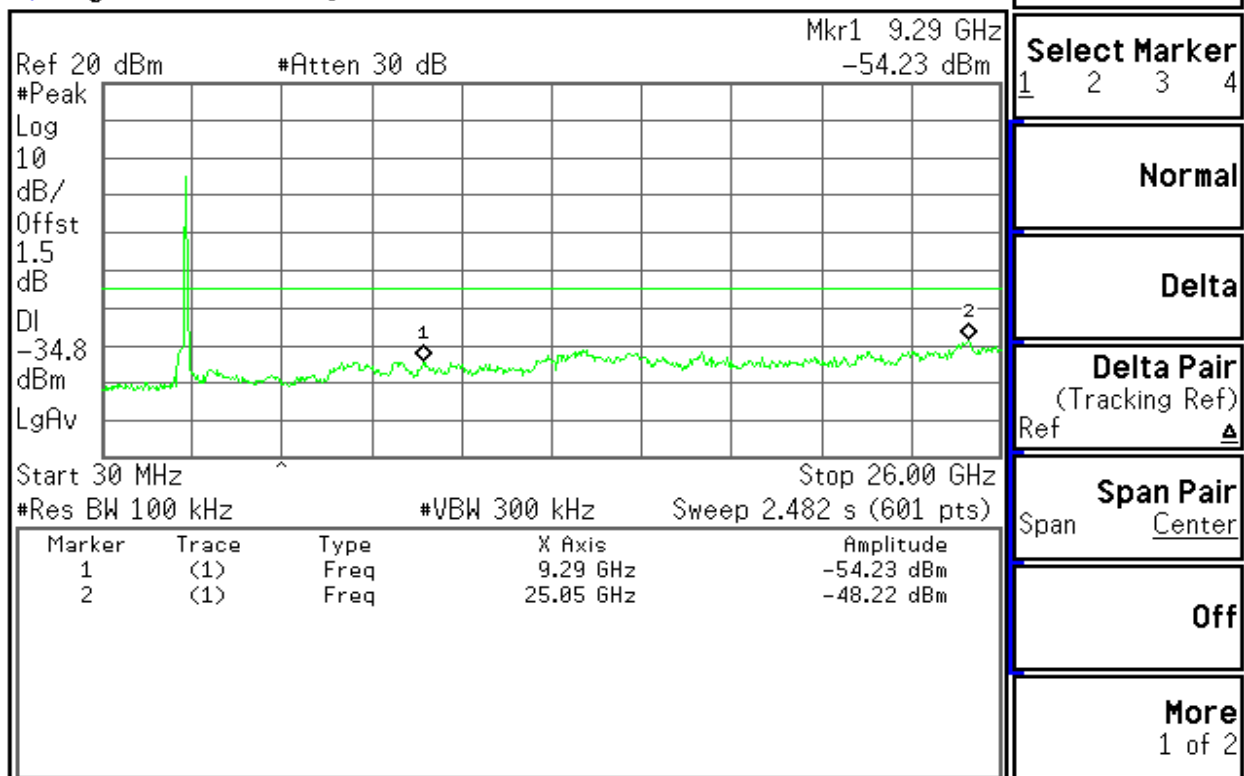


Copyright 2000-2004 Agilent Technologies




draft 802.11n Standard-20 MHz Channel mode / Chain 0

CH Low

* Agilent 13:47:22 Jul 22, 2006

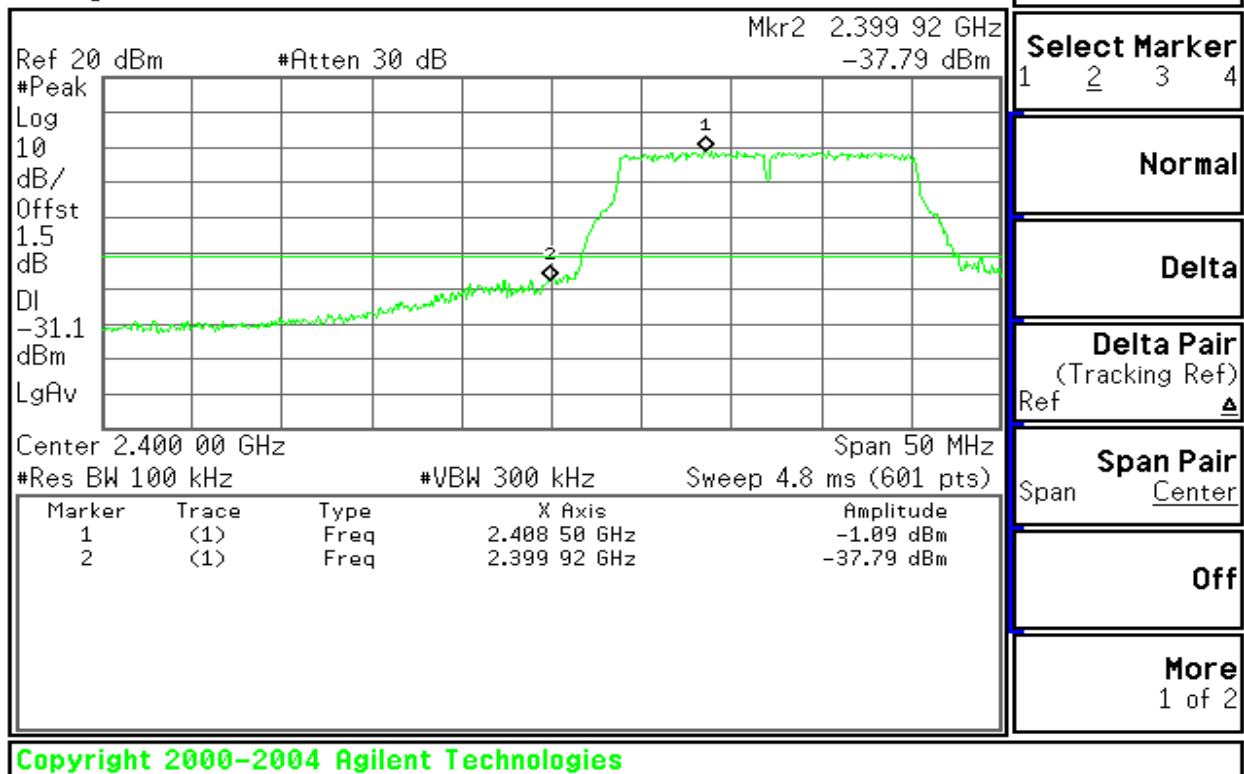


* Agilent 13:49:53 Jul 22, 2006

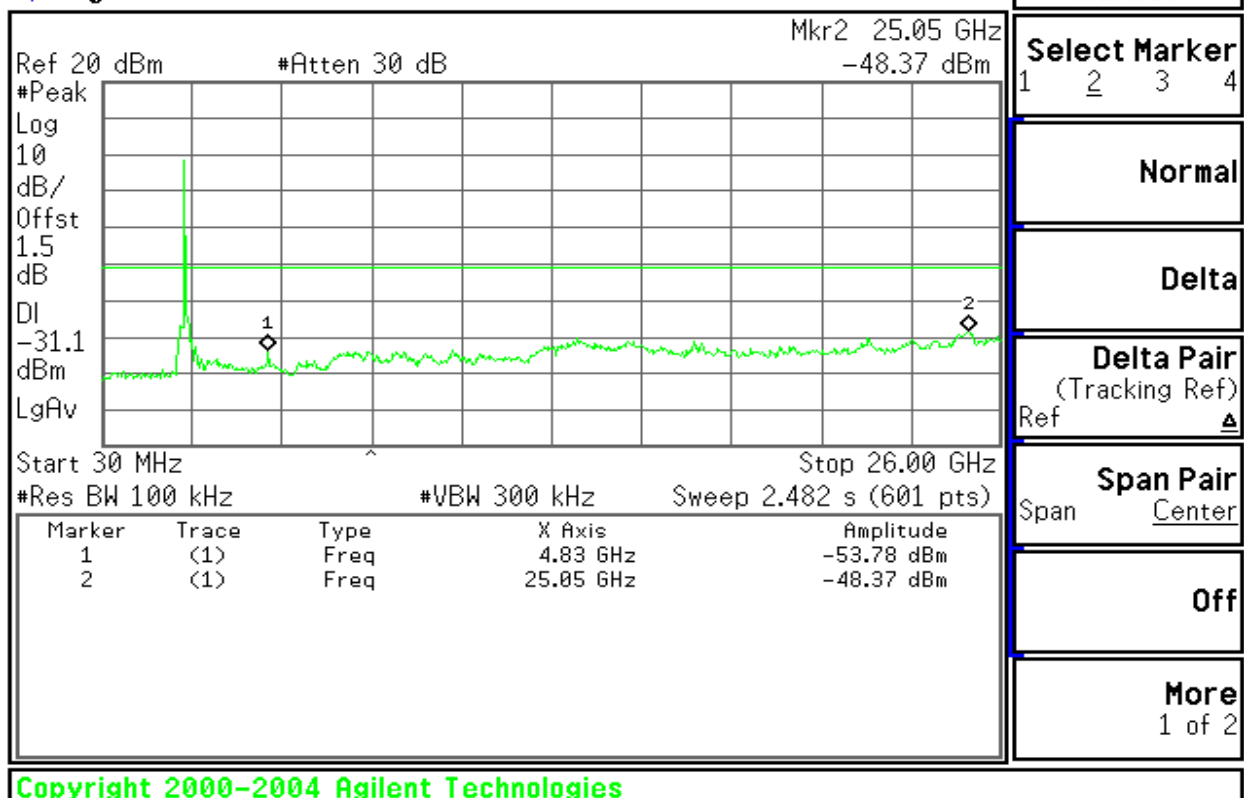




CH Mid

* Agilent 13:53:30 Jul 22, 2006

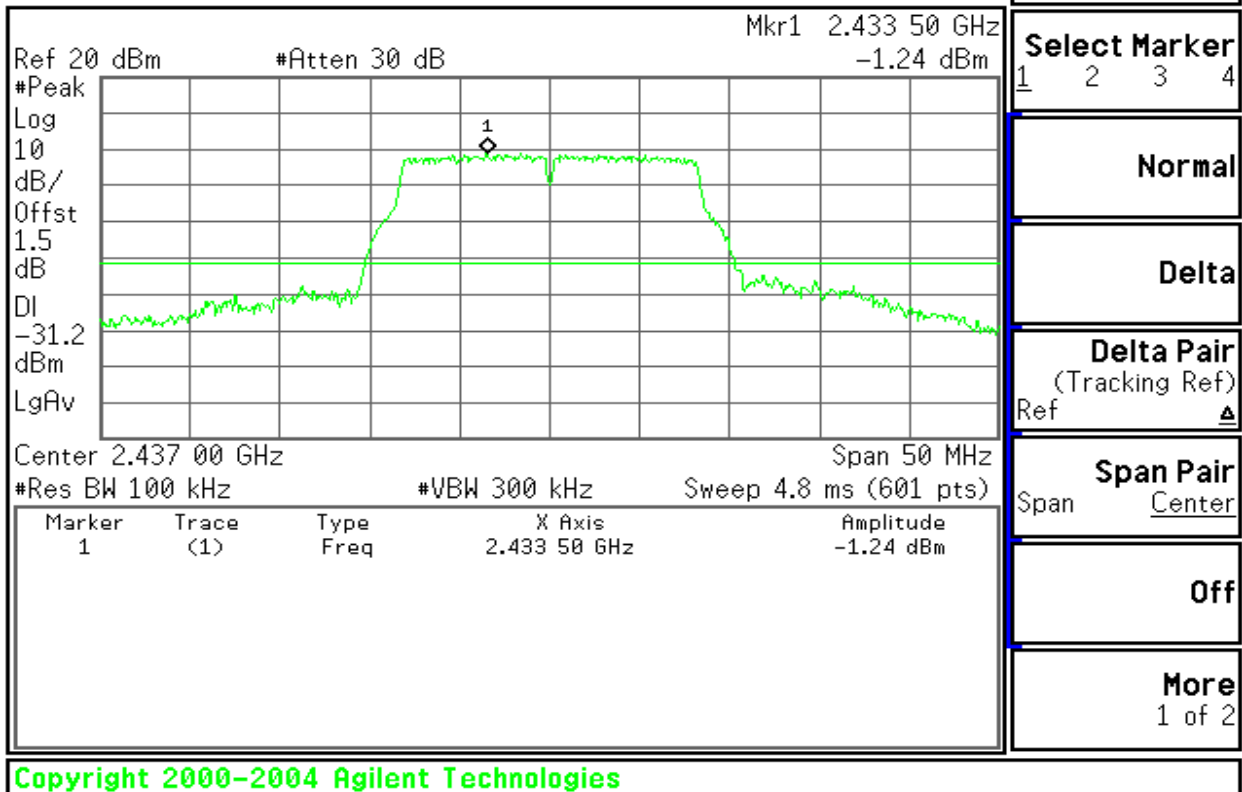


* Agilent 13:54:05 Jul 22, 2006

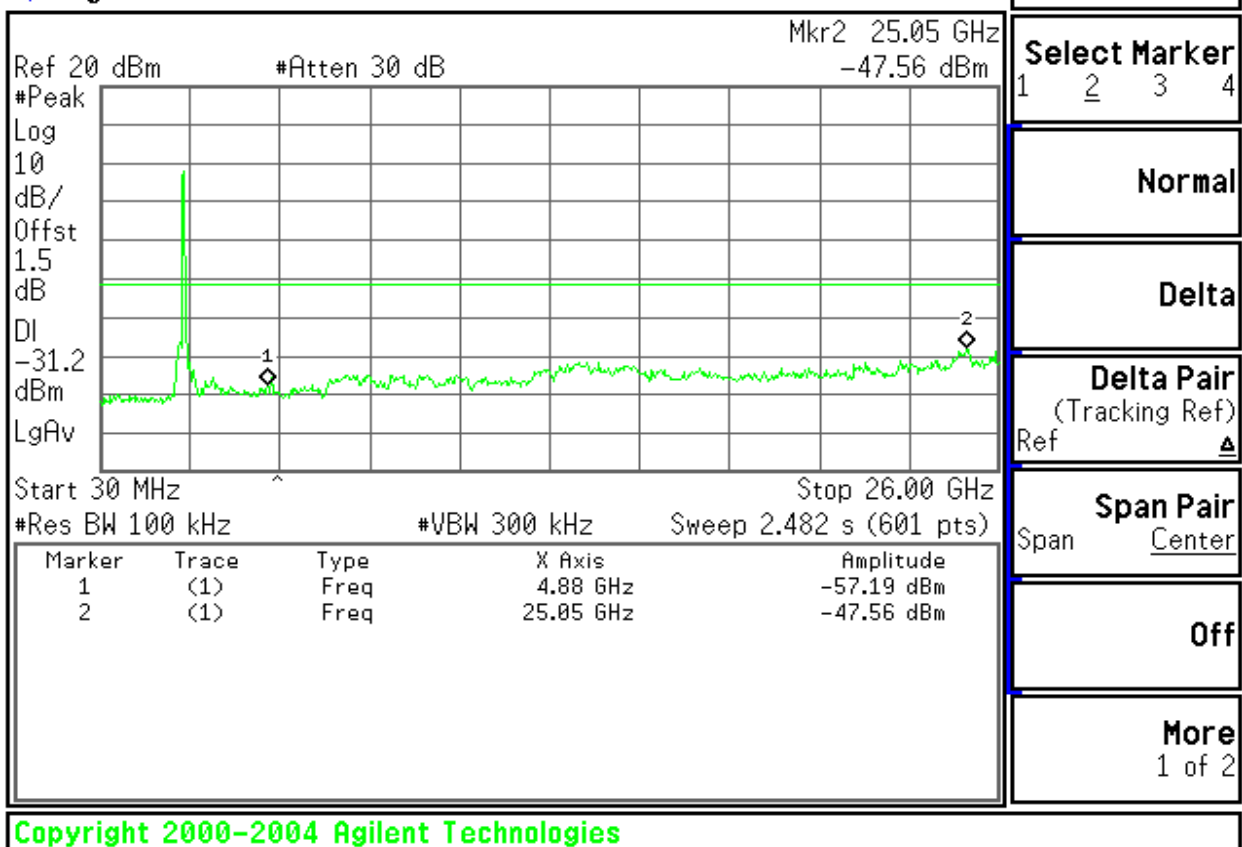




CH High

* Agilent 13:51:25 Jul 22, 2006

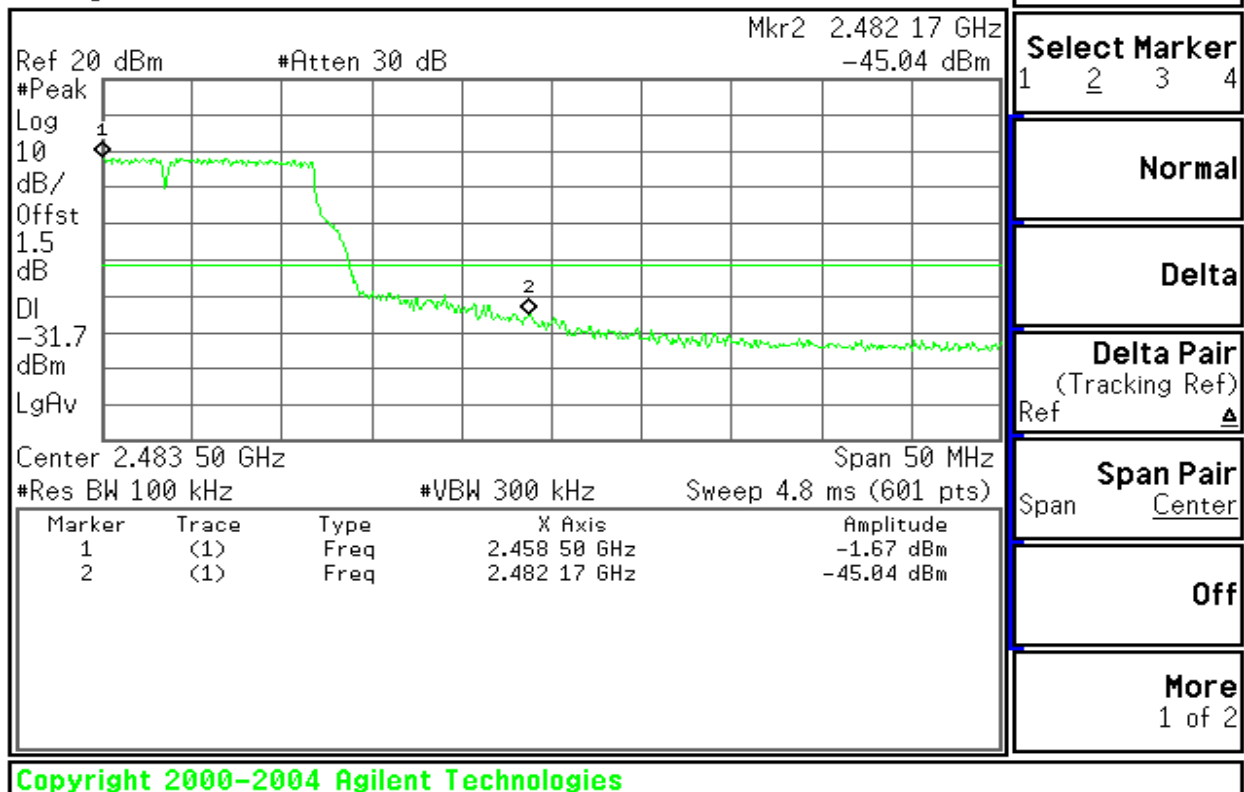

* Agilent 13:52:20 Jul 22, 2006

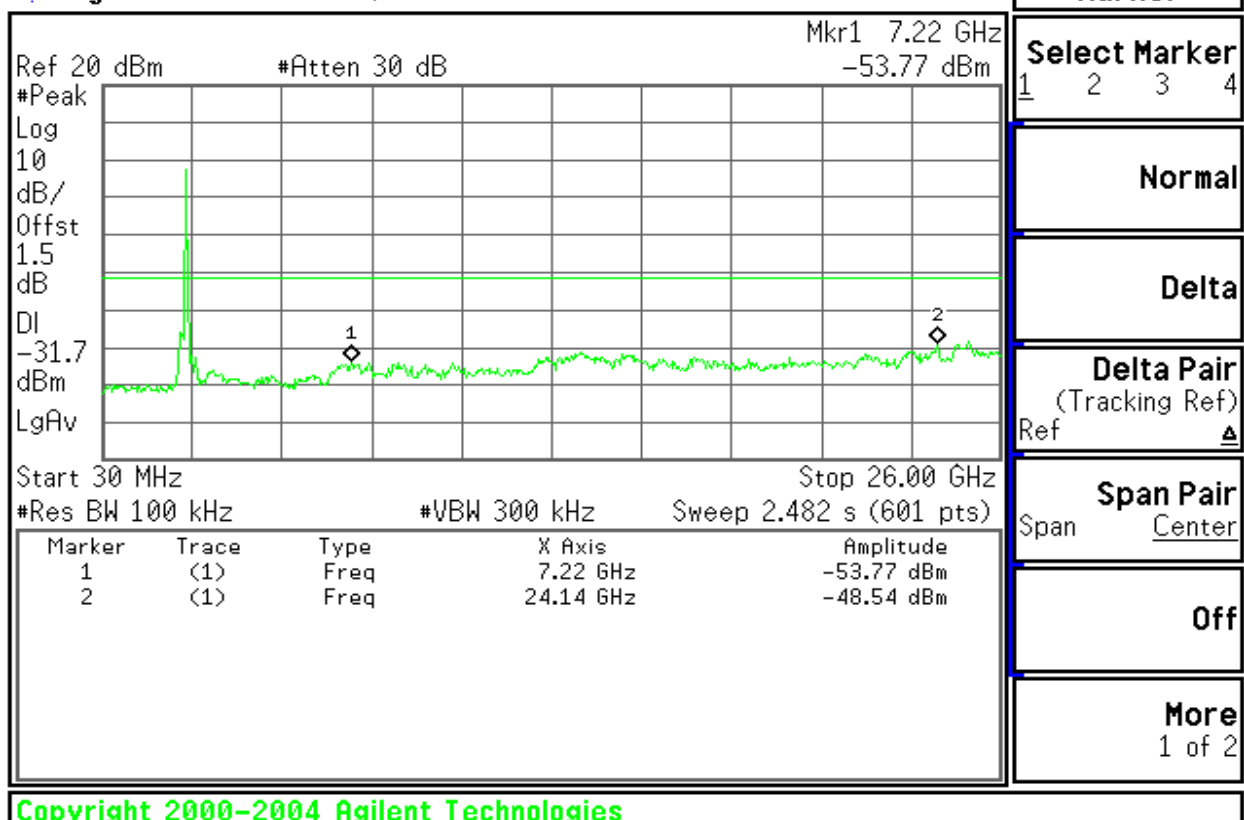





draft 802.11n Standard-20 MHz Channel mode / Chain 1

CH Low

* Agilent 13:58:28 Jul 22, 2006

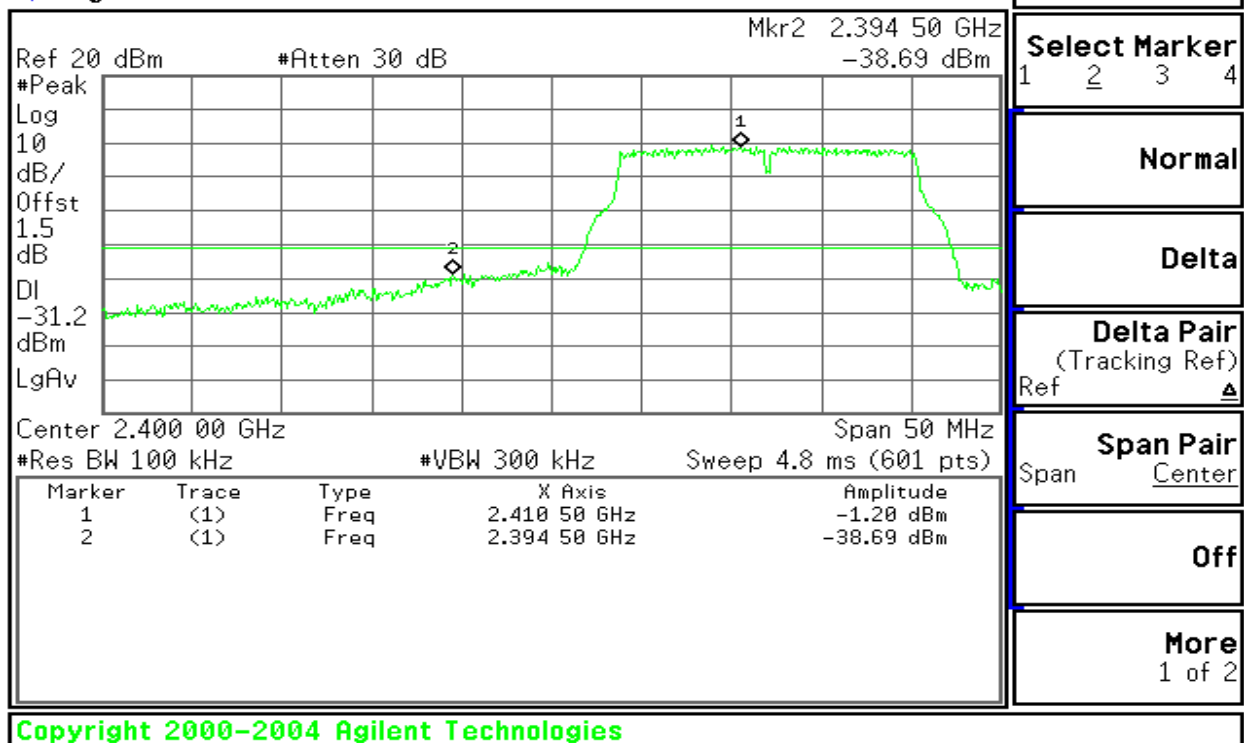


* Agilent 13:59:15 Jul 22, 2006

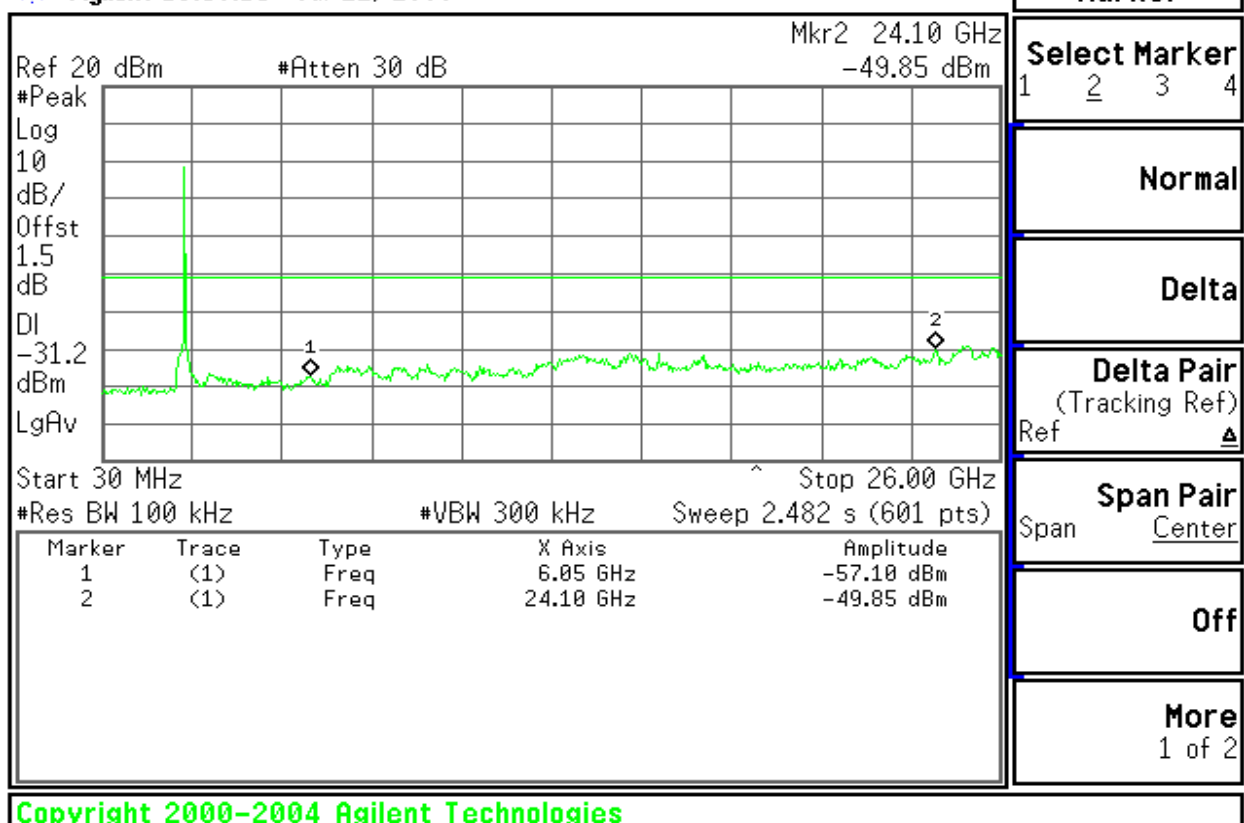




CH Mid

Agilent 13:56:43 Jul 22, 2006

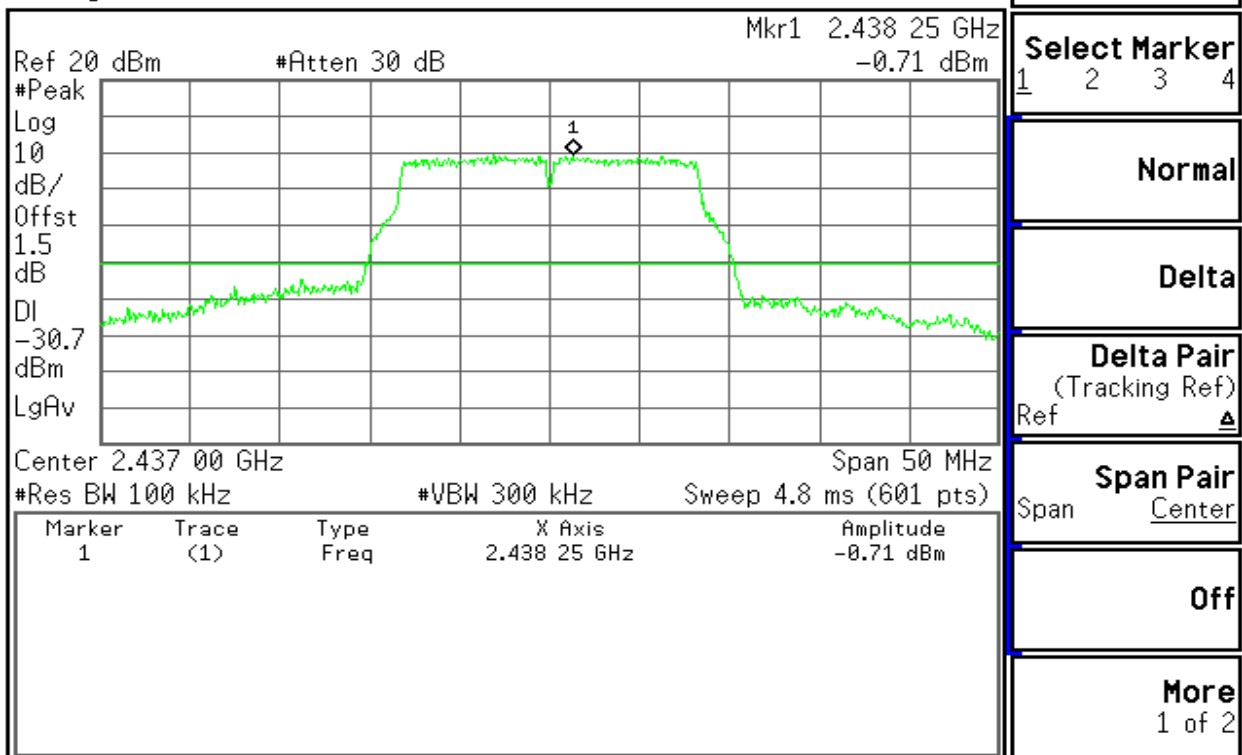

Copyright 2000-2004 Agilent Technologies

Agilent 13:57:38 Jul 22, 2006

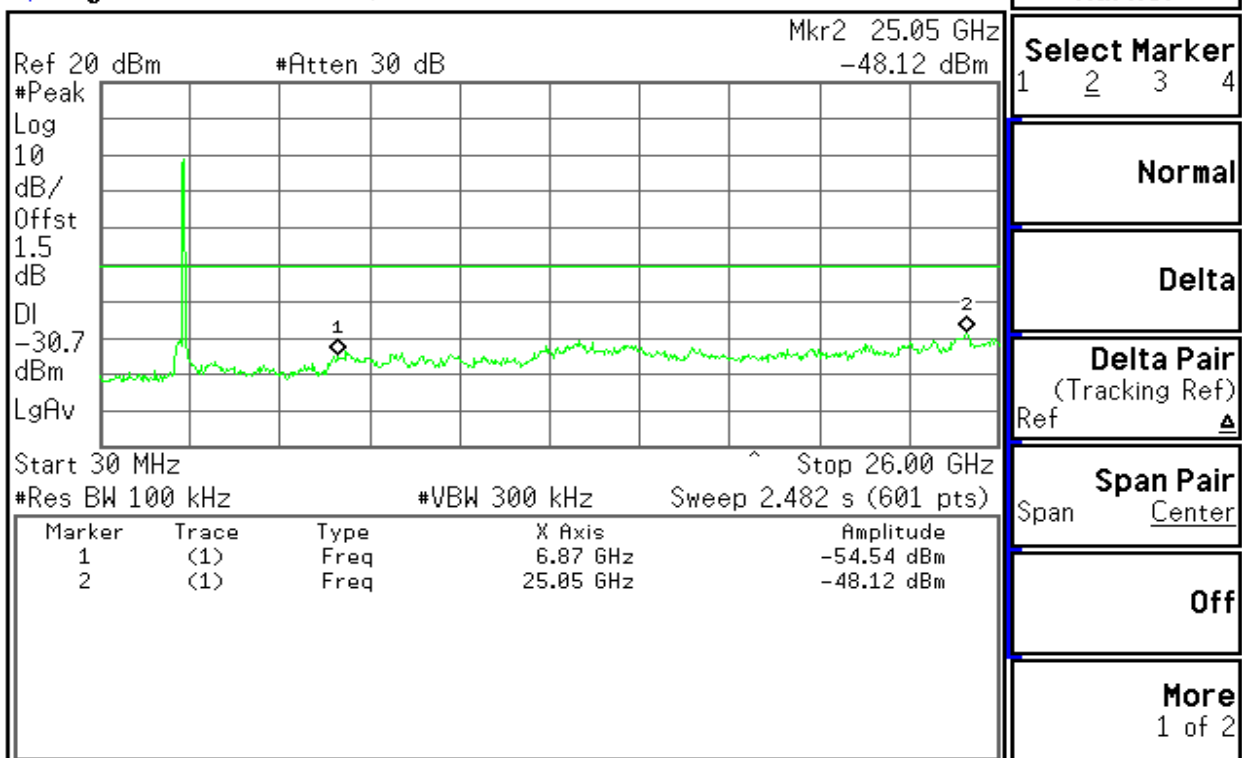


Copyright 2000-2004 Agilent Technologies




CH High

* Agilent 14:00:07 Jul 22, 2006

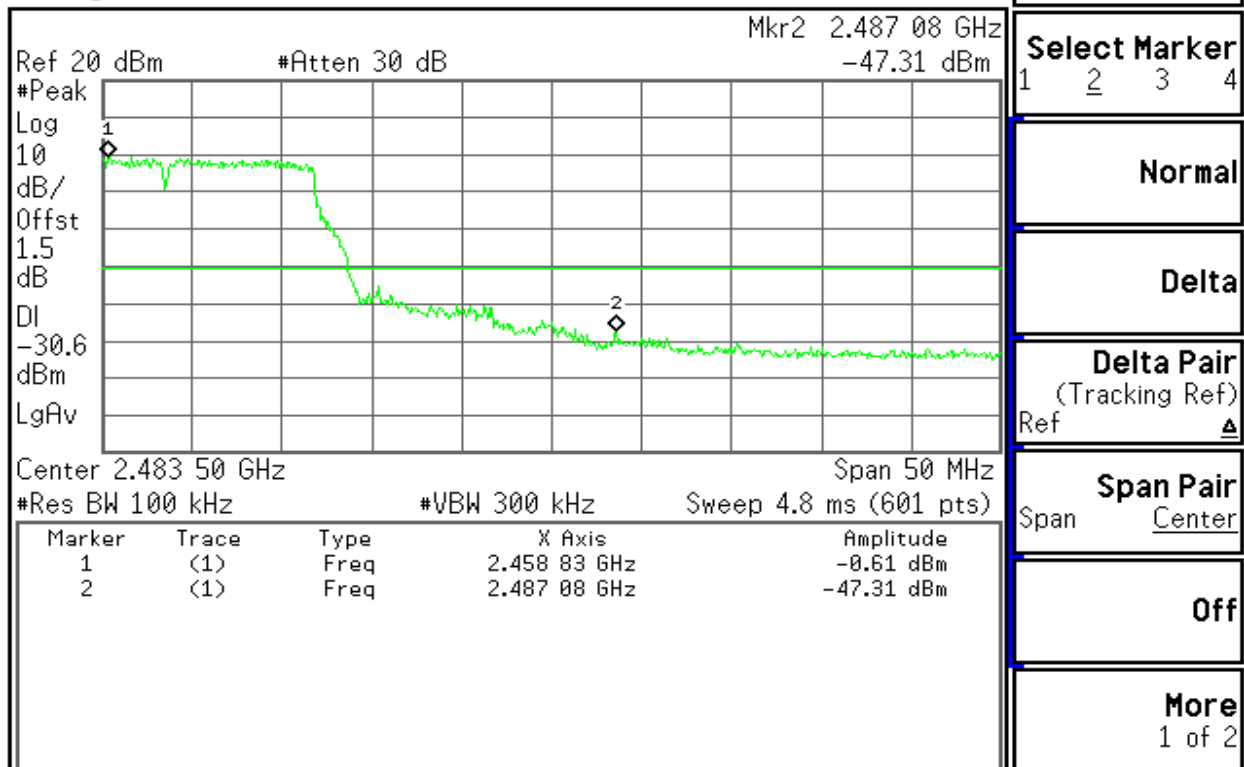

Copyright 2000-2004 Agilent Technologies

* Agilent 14:02:22 Jul 22, 2006

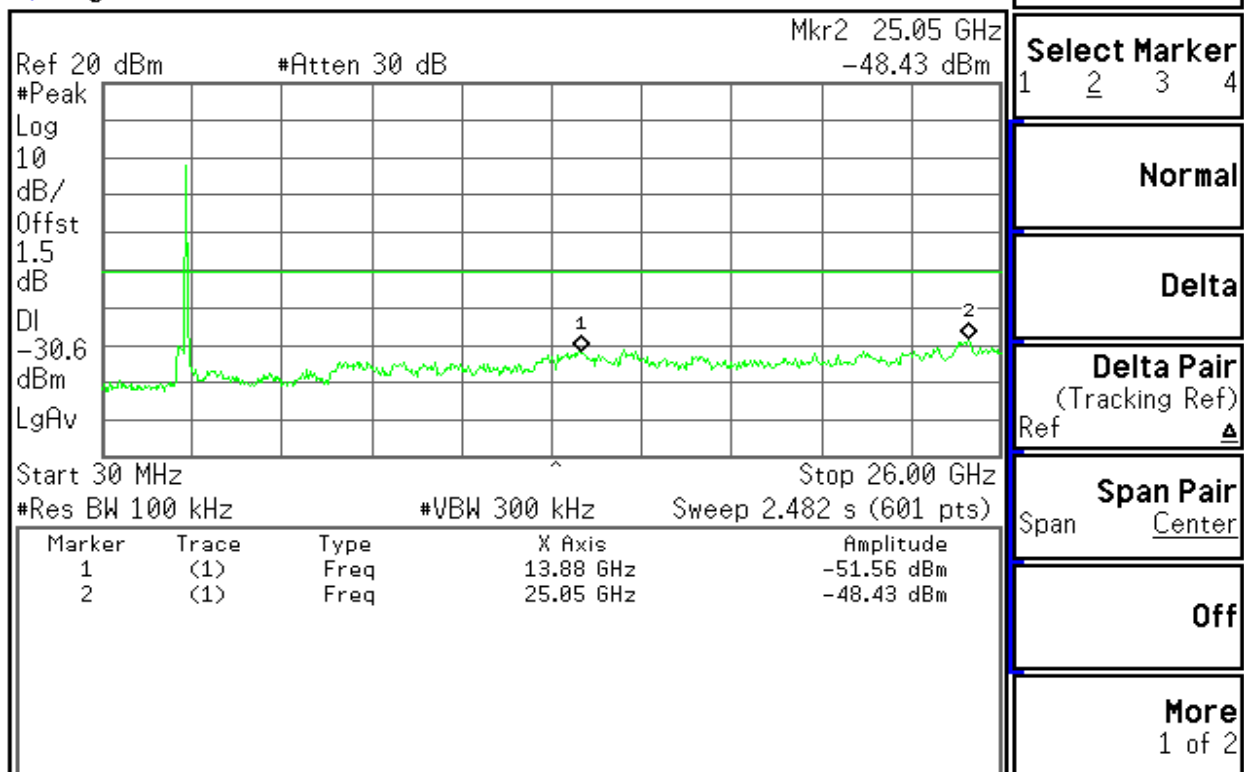


Copyright 2000-2004 Agilent Technologies




draft 802.11n Wide-40 MHz Channel mode / Chain 0

CH Low

* Agilent 15:41:43 Aug 2, 2006

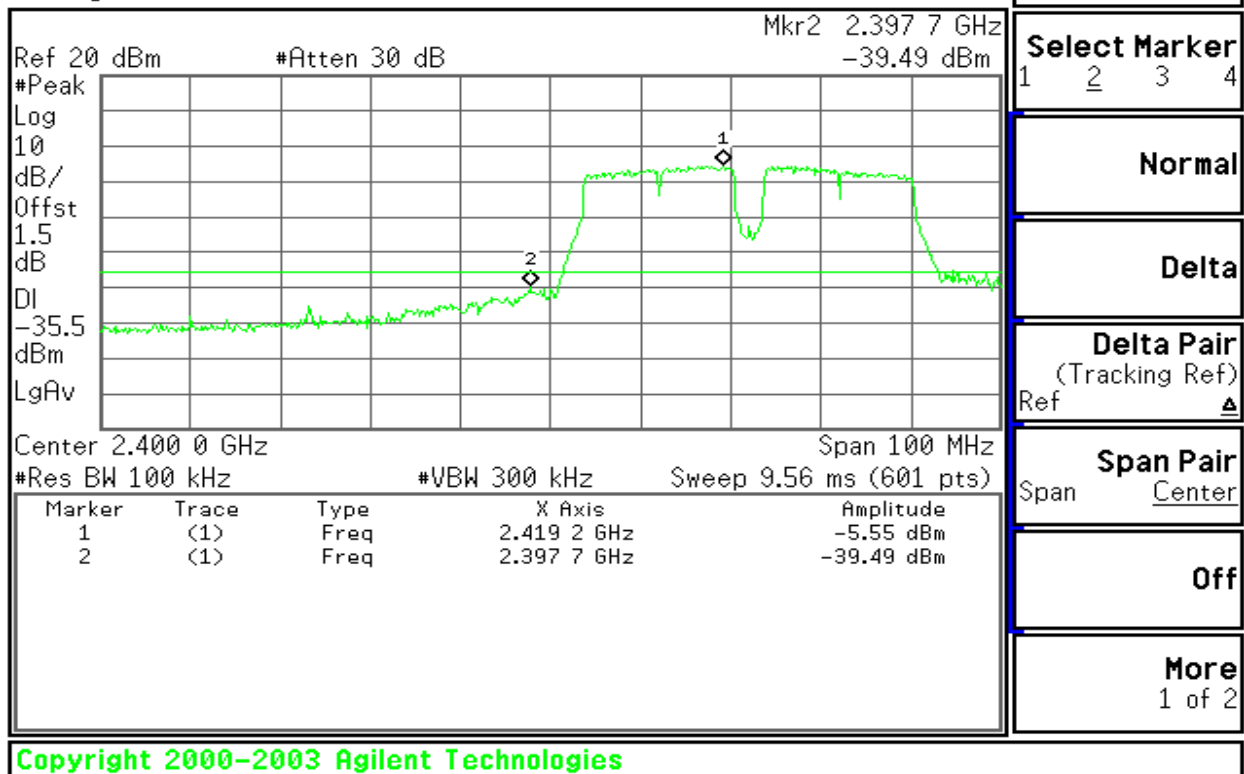


* Agilent 15:42:37 Aug 2, 2006

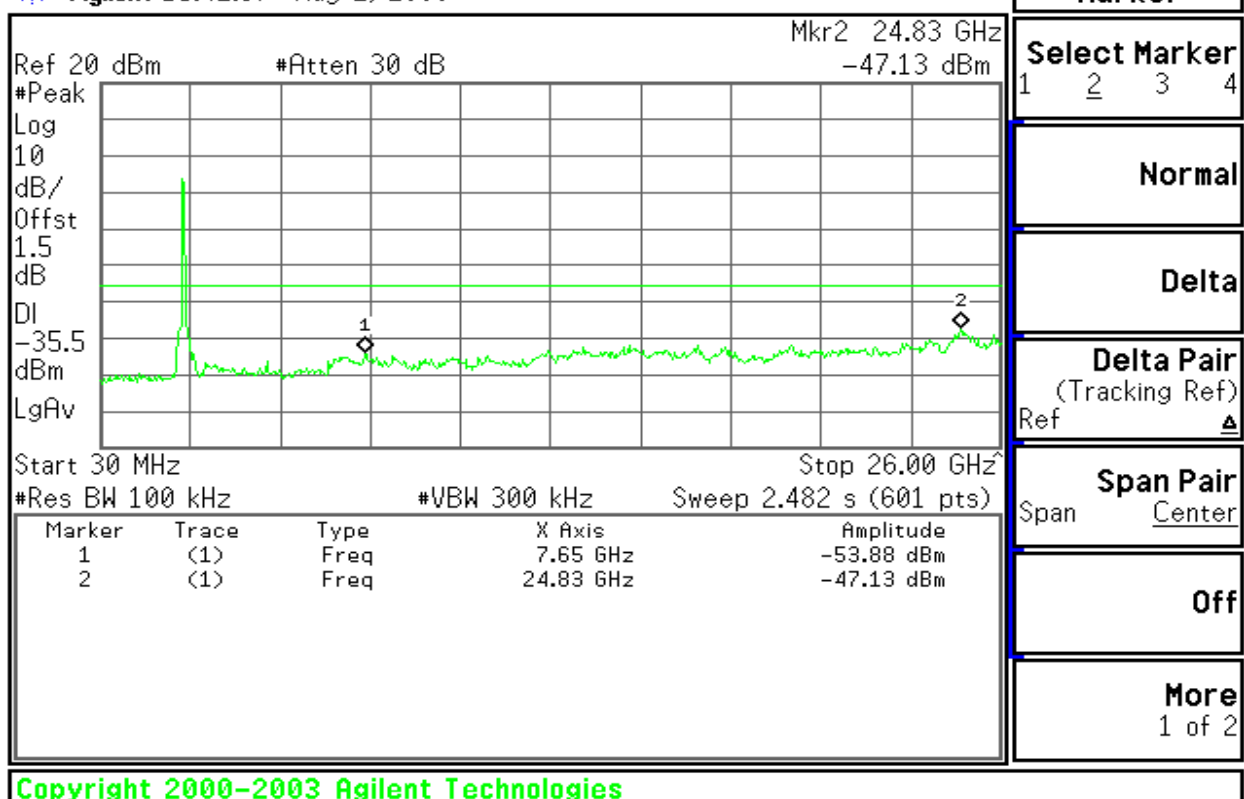




CH Mid

* Agilent 15:39:37 Aug 2, 2006

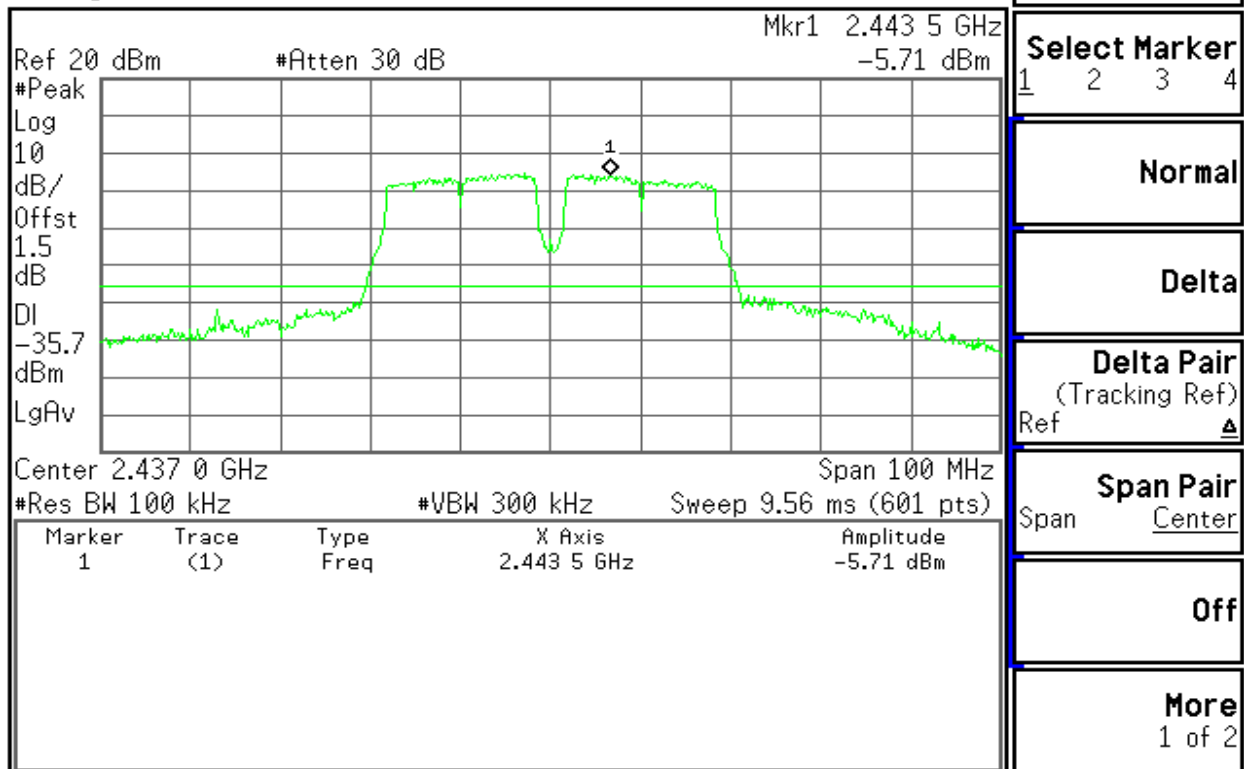

Copyright 2000-2003 Agilent Technologies

* Agilent 15:40:33 Aug 2, 2006

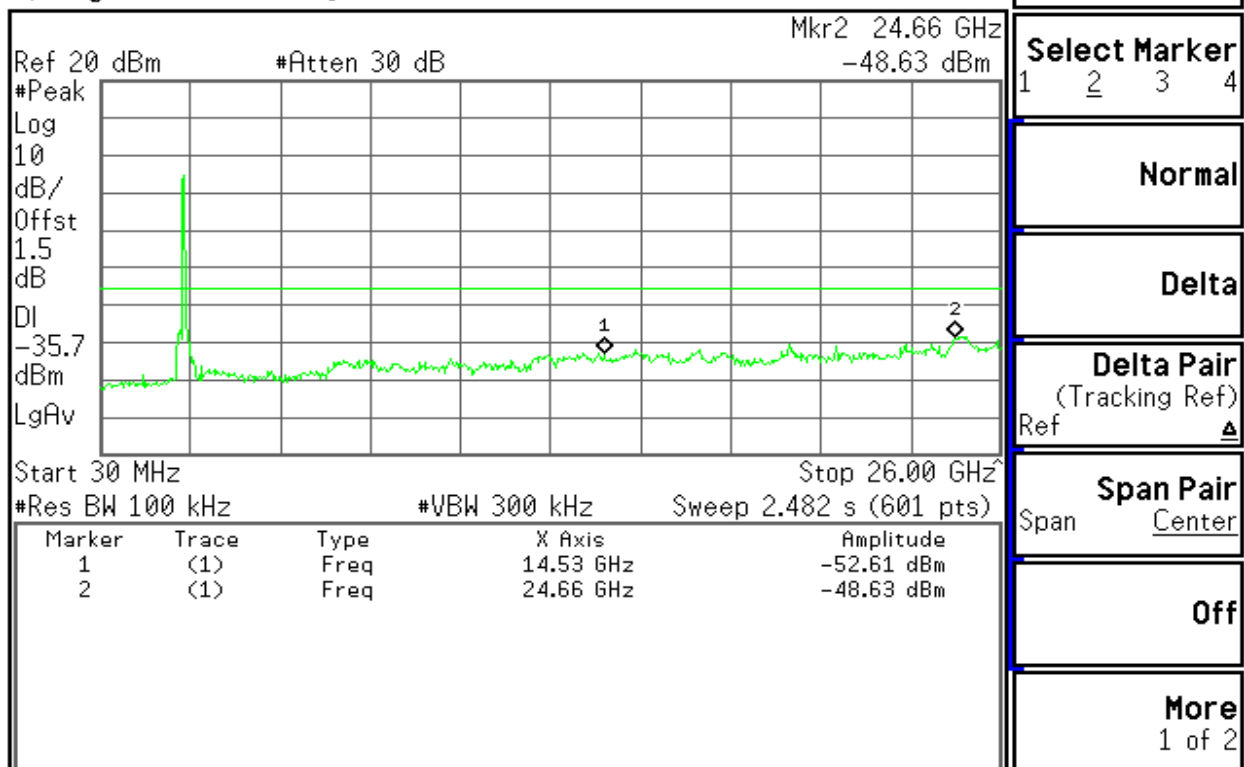


Copyright 2000-2003 Agilent Technologies




CH High

* Agilent 15:37:43 Aug 2, 2006

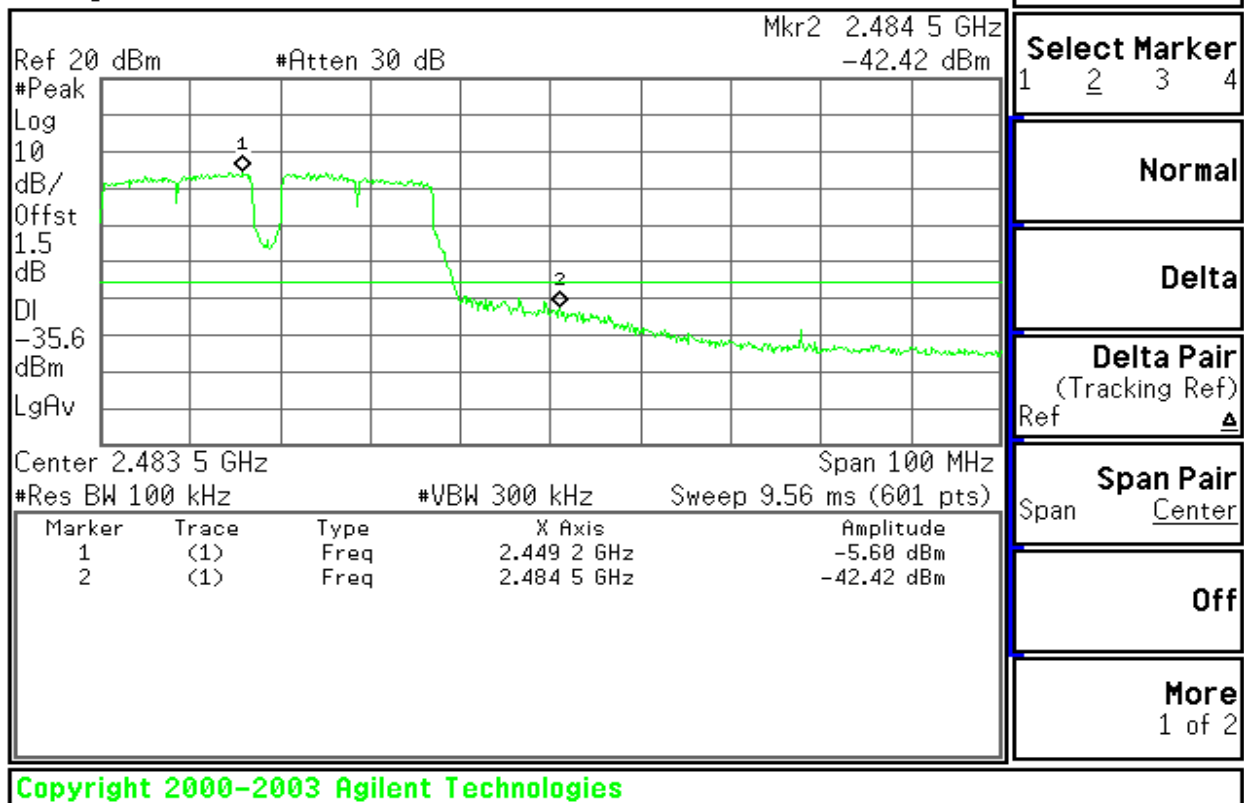

* Agilent 15:38:30 Aug 2, 2006

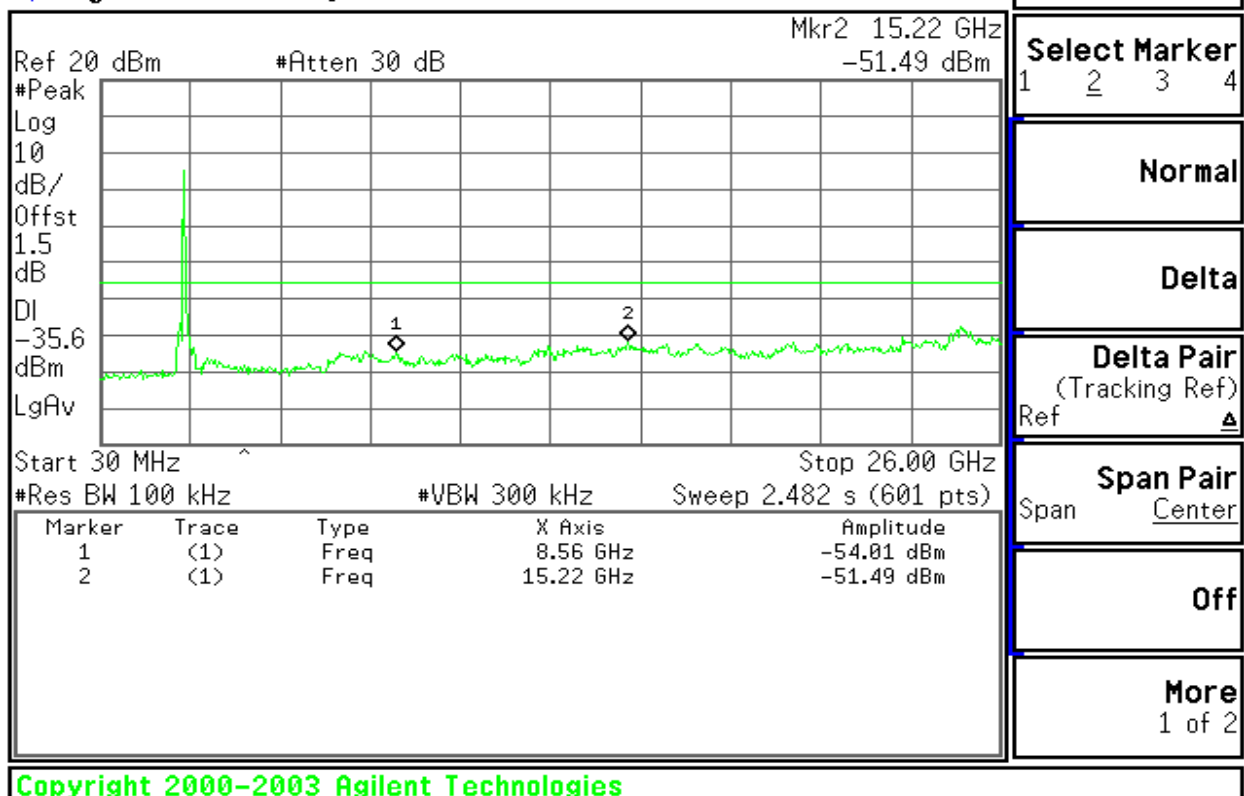





draft 802.11n Wide-40 MHz Channel mode / Chain 1

CH Low

* Agilent 15:27:10 Aug 2, 2006

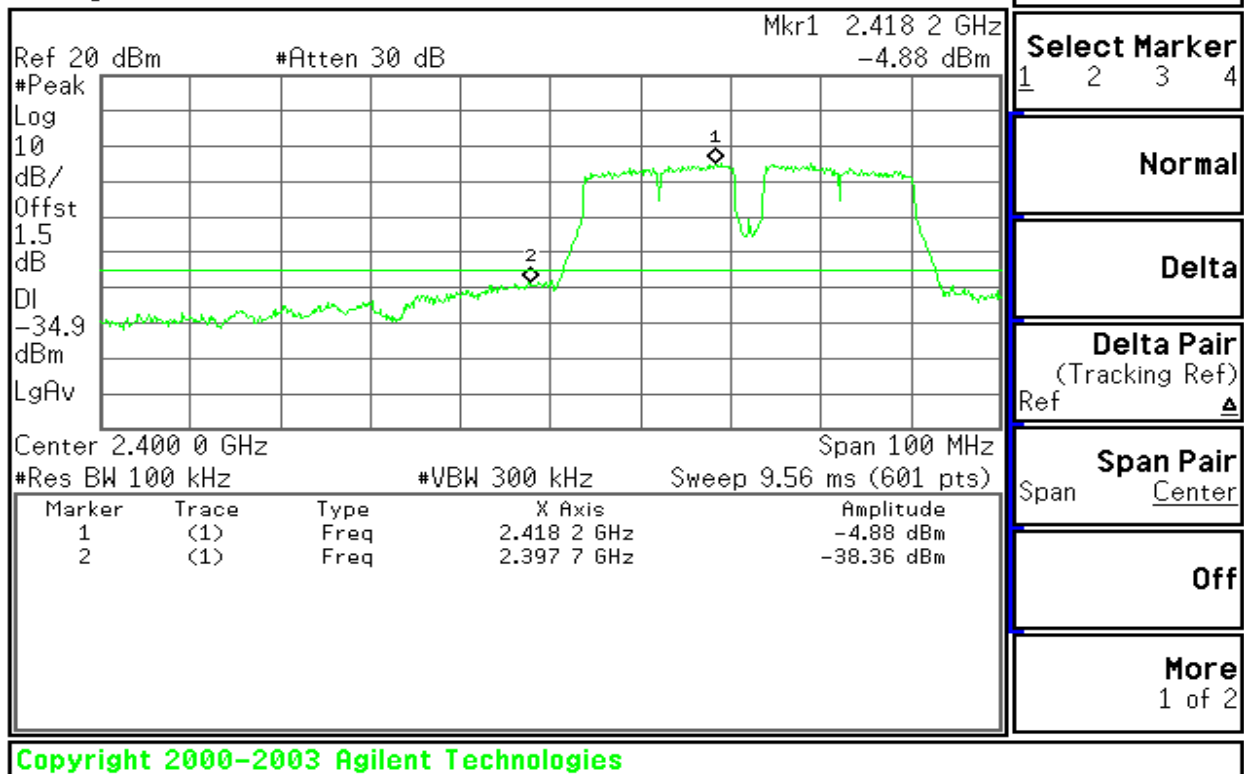


* Agilent 15:28:36 Aug 2, 2006

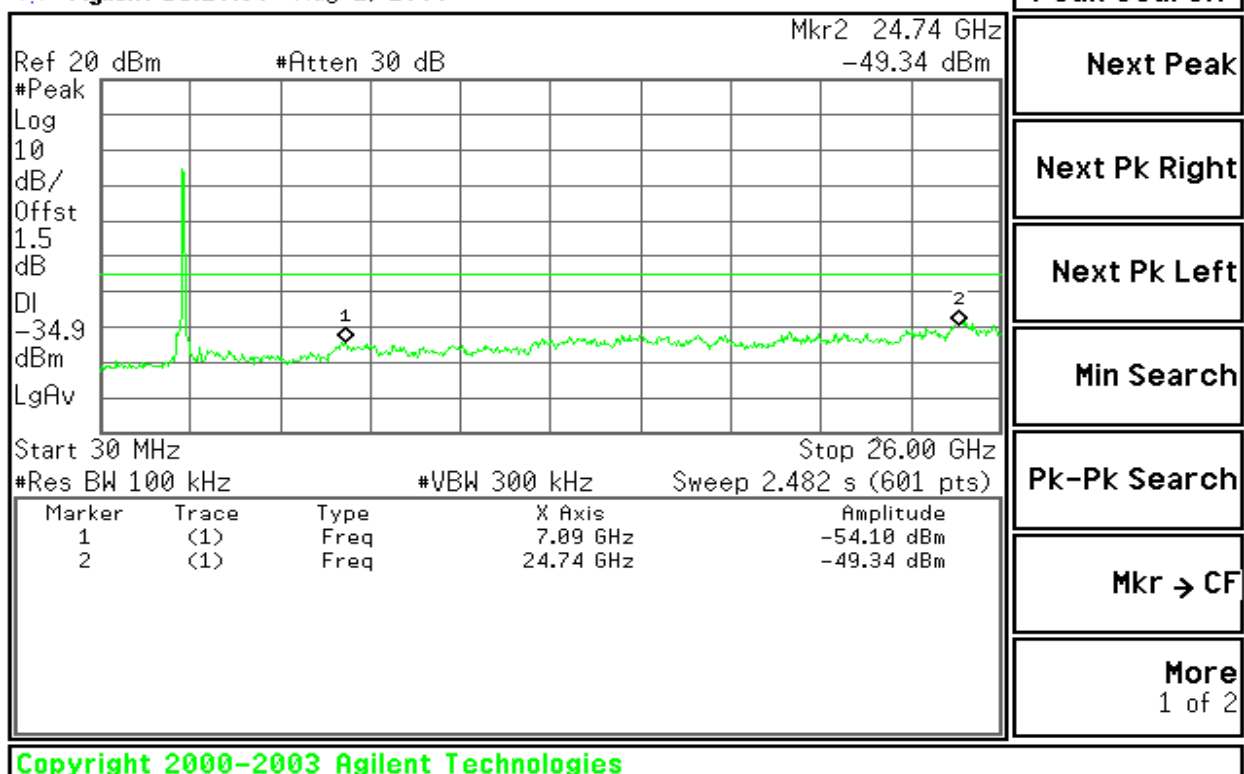




CH Mid

* Agilent 15:30:01 Aug 2, 2006

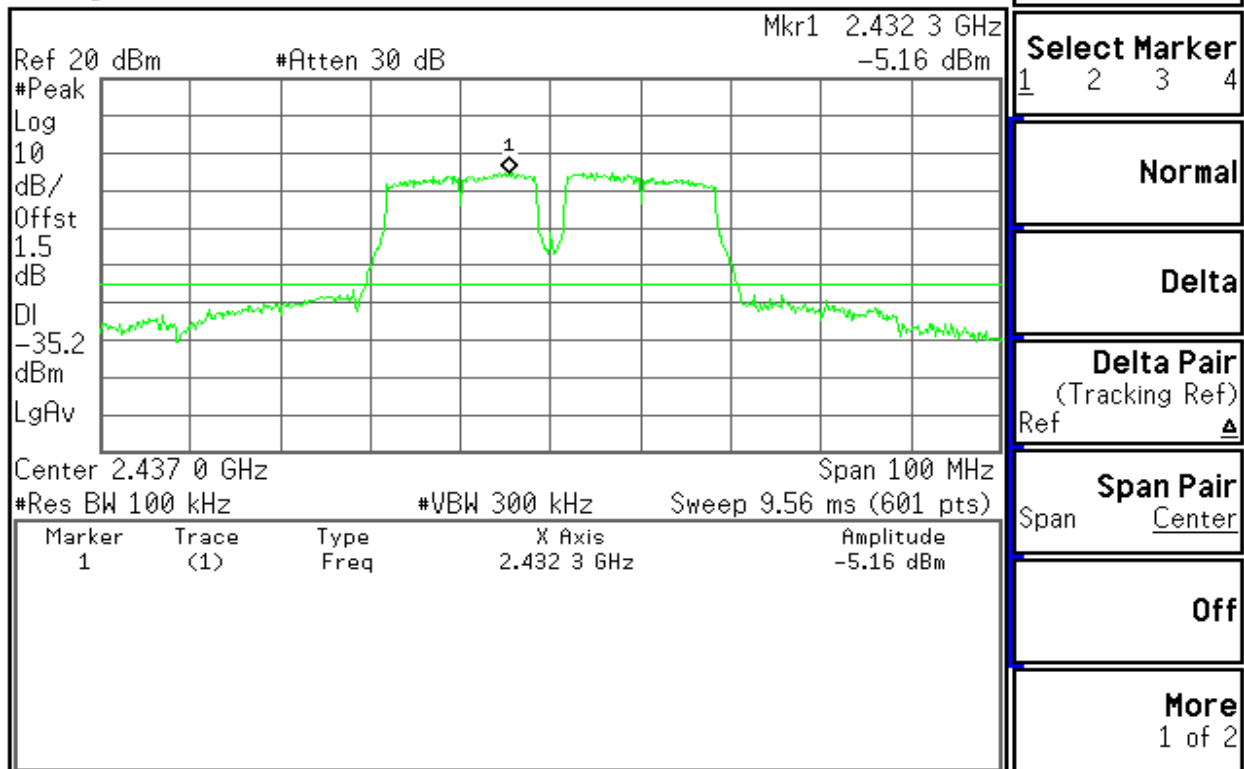

Copyright 2000-2003 Agilent Technologies

* Agilent 15:31:19 Aug 2, 2006

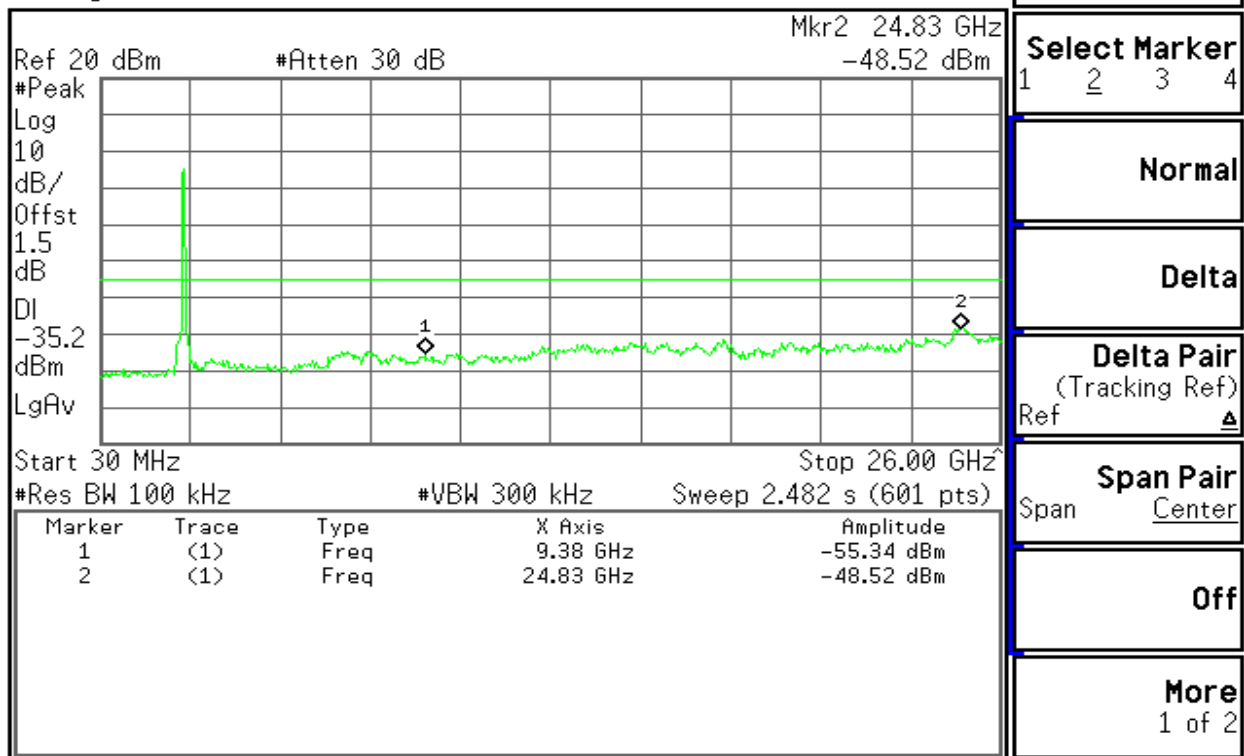


Copyright 2000-2003 Agilent Technologies



CH High


Agilent 15:32:56 Aug 2, 2006

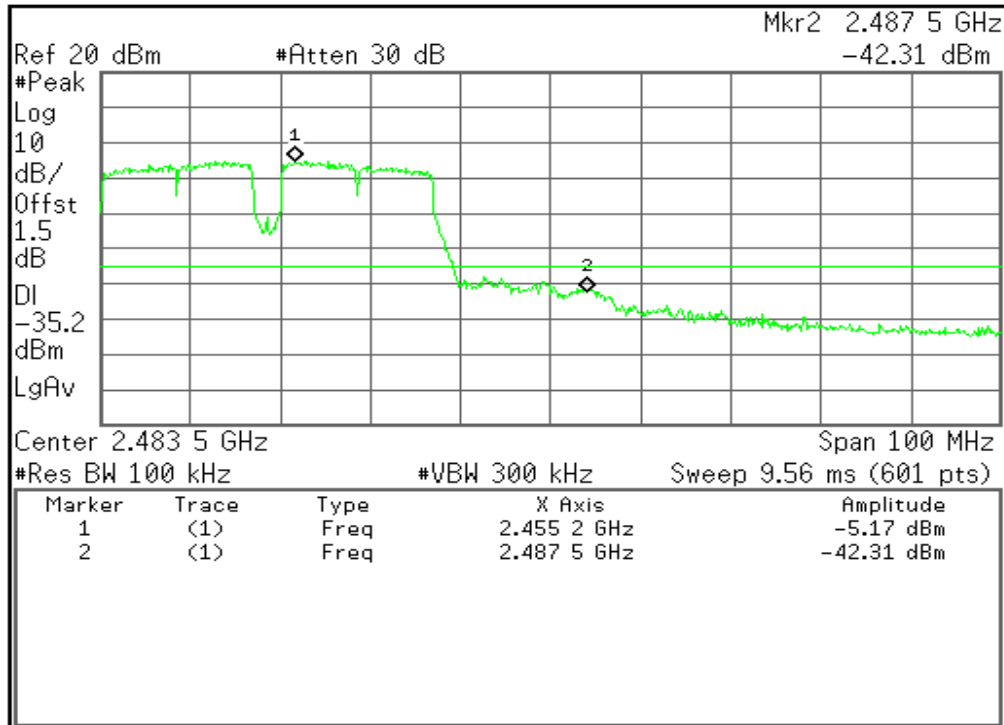

Marker
Select Marker 1 2 3 4
Normal
Delta
Delta Pair (Tracking Ref) Ref
Span Pair Span <u>Center</u>
Off
More 1 of 2

Copyright 2000-2003 Agilent Technologies

Agilent 15:33:42 Aug 2, 2006

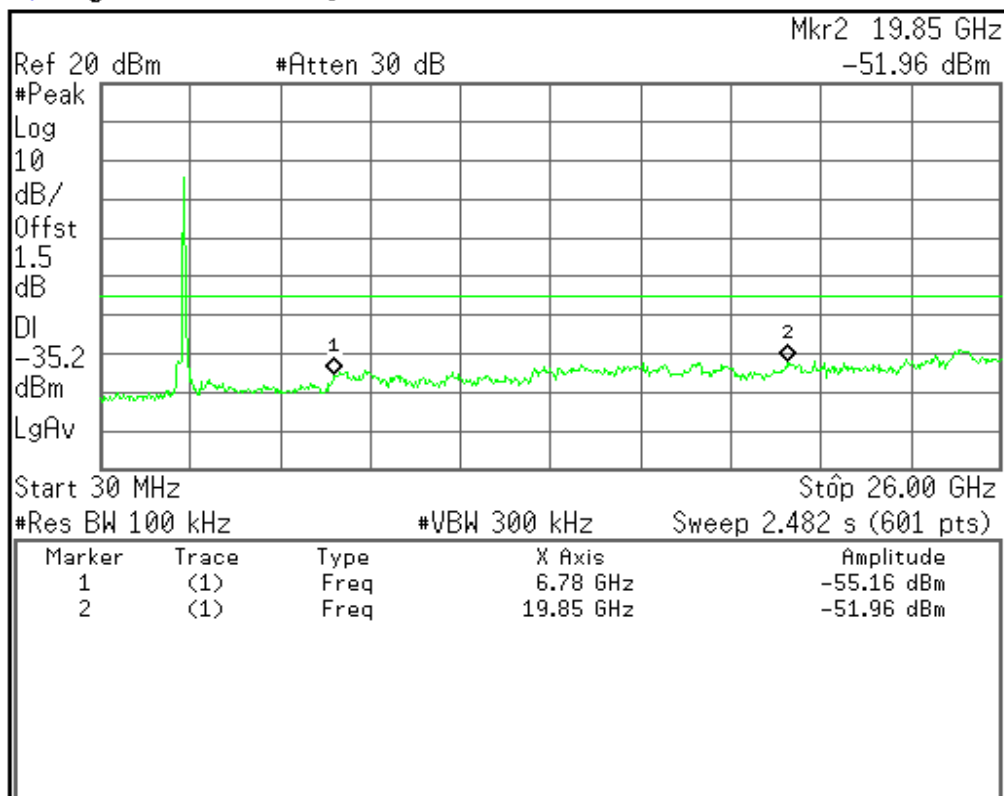

Marker
Select Marker 1 2 3 4
Normal
Delta
Delta Pair (Tracking Ref) Ref
Span Pair Span <u>Center</u>
Off
More 1 of 2

Copyright 2000-2003 Agilent Technologies



7.6 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

Below 1 GHz

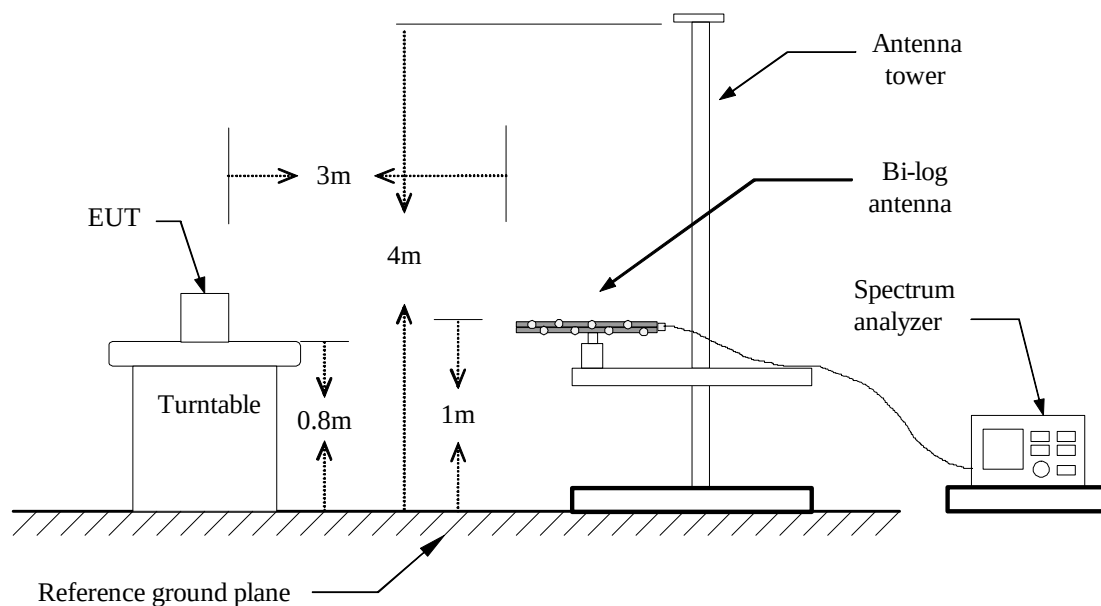

Above 1 GHz

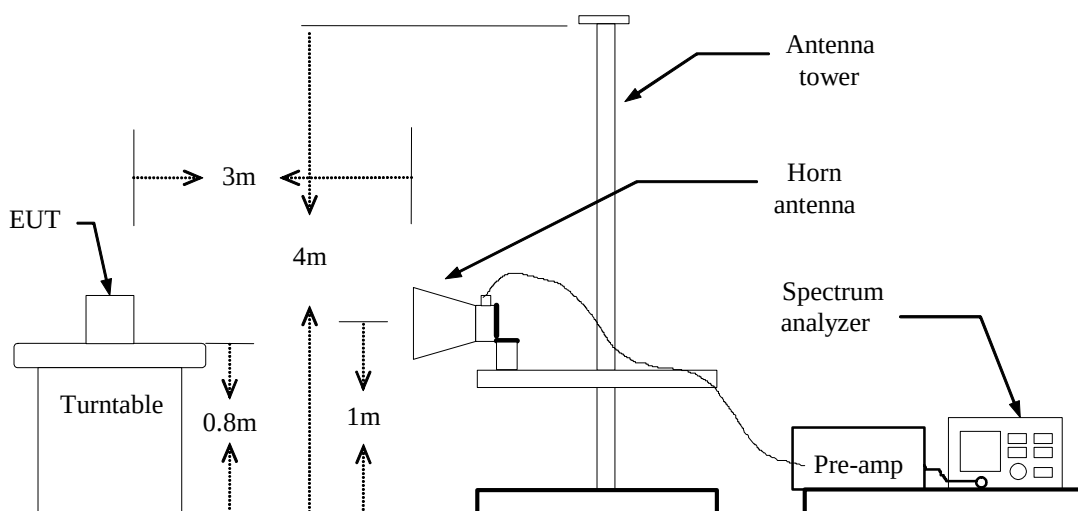




TEST PROCEDURE


1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****RESTRICTED BANDEDGE (b Mode, Low Channel, Horizontal)****PEAK**

* Agilent 19:51:47 Jul 21, 2006

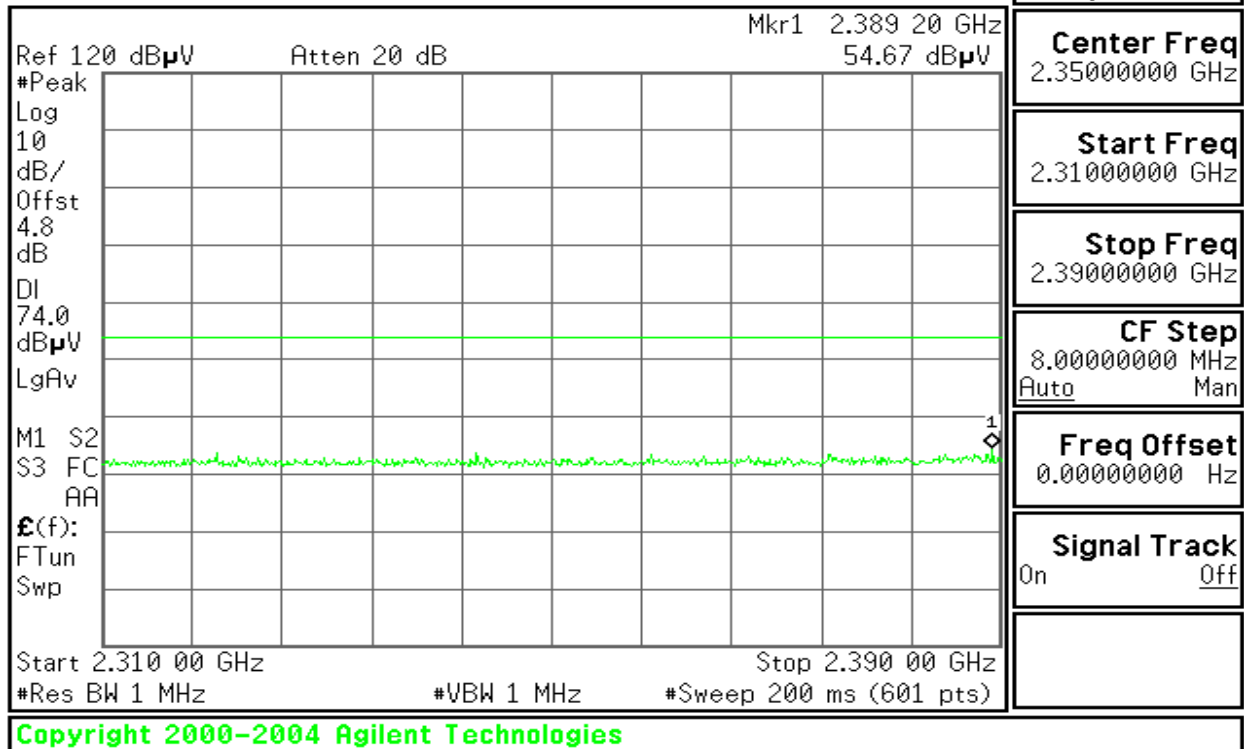
**AVG**

* Agilent 19:53:46 Jul 21, 2006

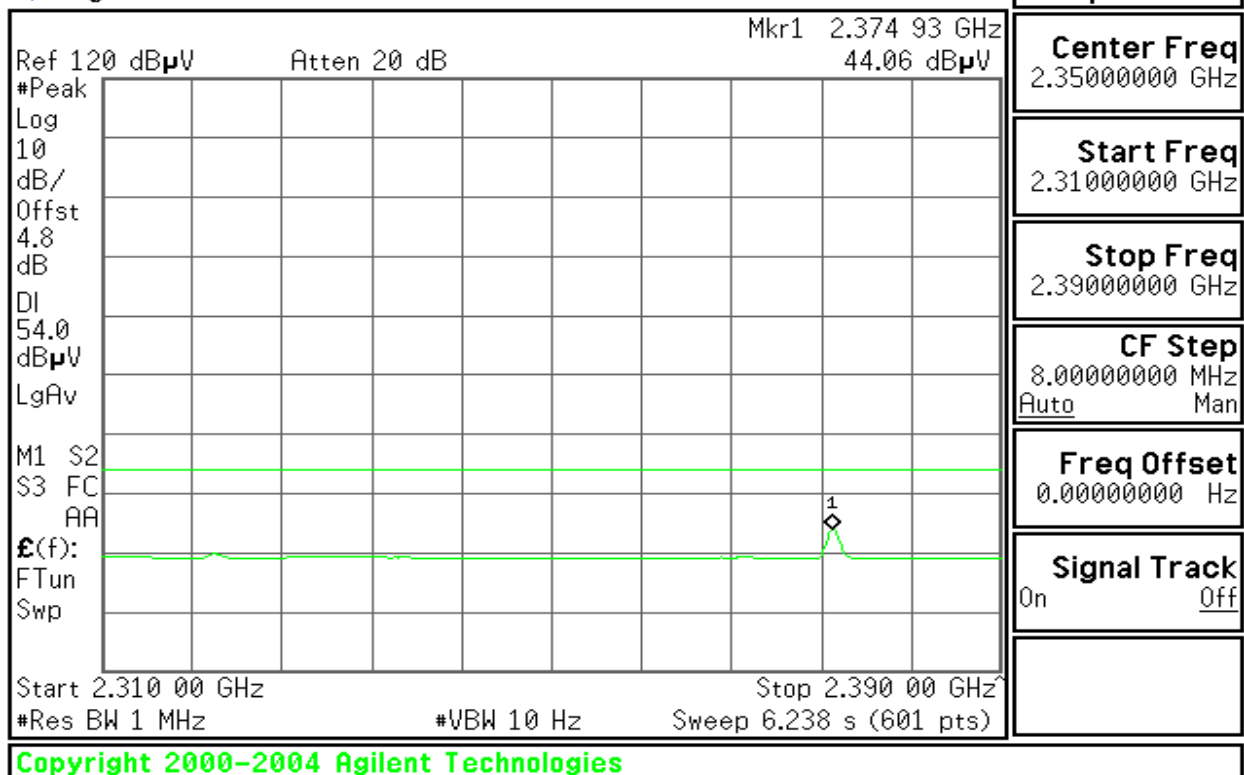


**RESTRICTED BANDEDGE (b Mode, Low Channel, Vertical)****PEAK**

* Agilent 19:55:04 Jul 21, 2006

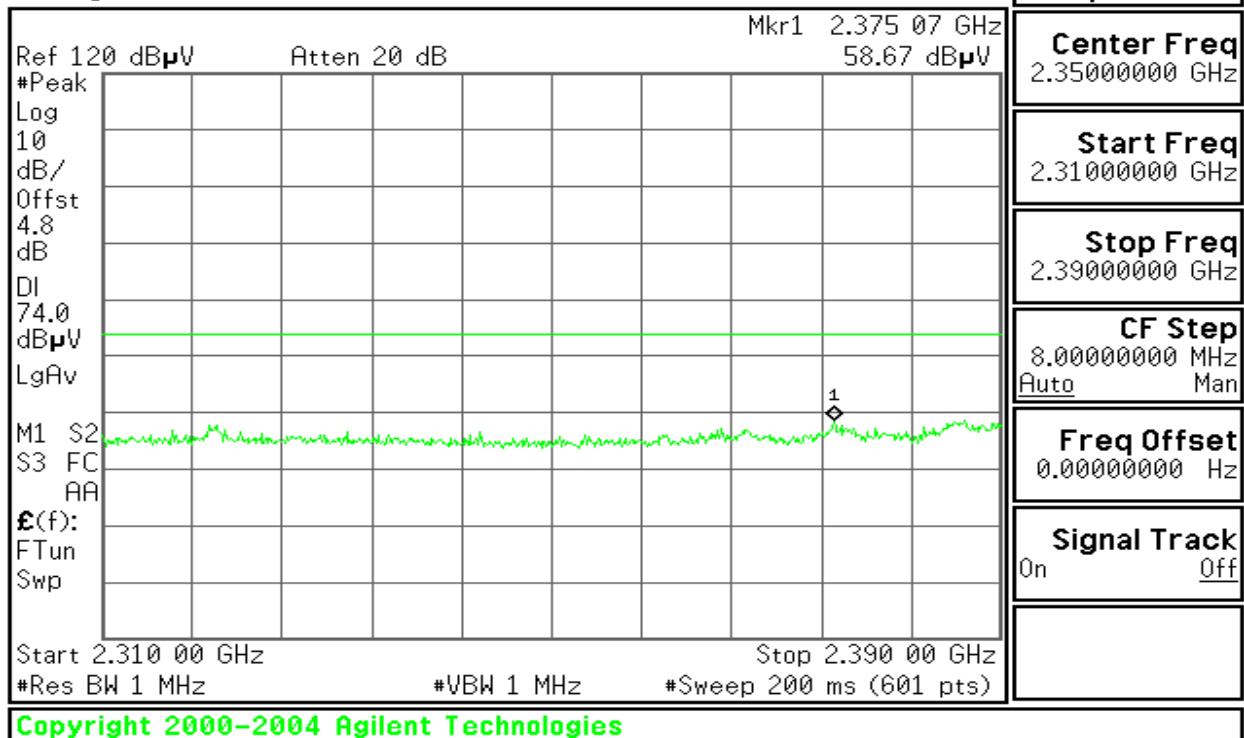
**AVG**

* Agilent 19:55:43 Jul 21, 2006

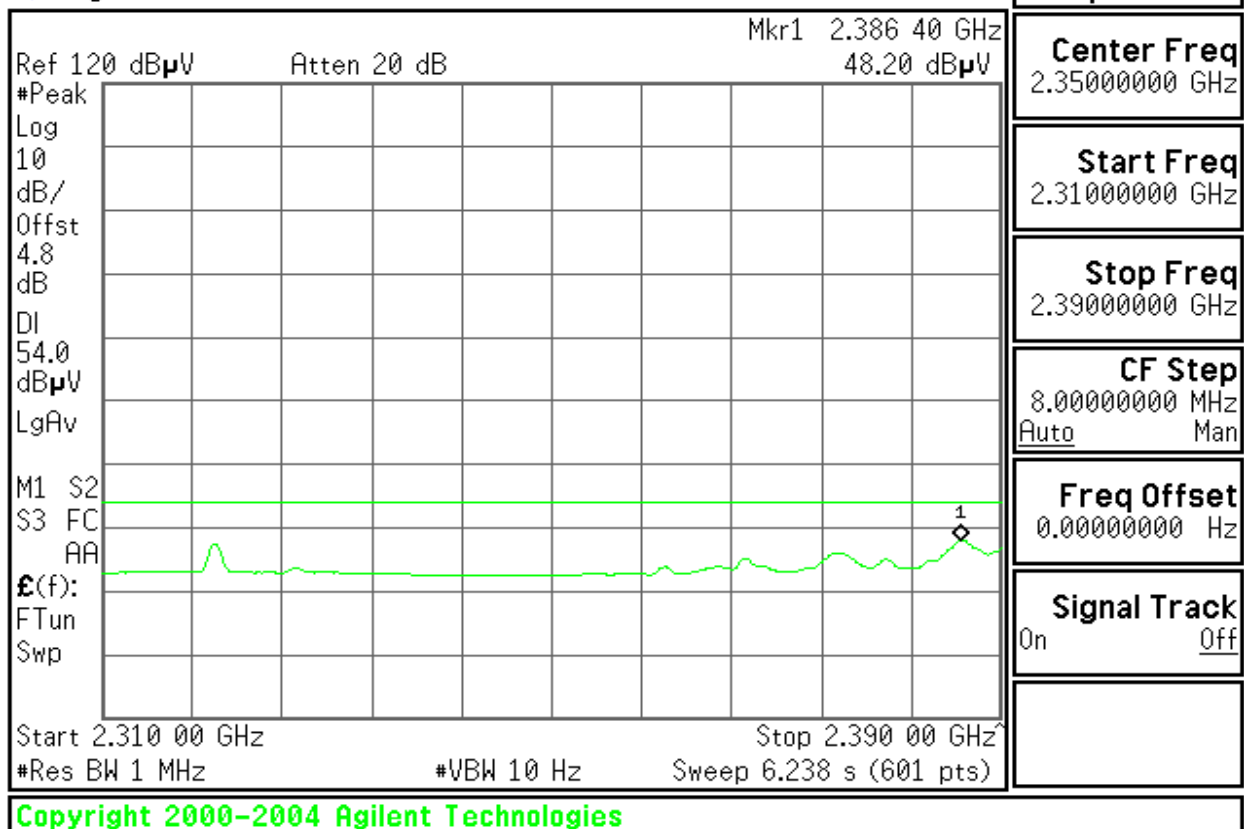


**RESTRICTED BANDEDGE (b Mode, High Channel, Horizontal)****PEAK**

* Agilent 20:06:53 Jul 21, 2006

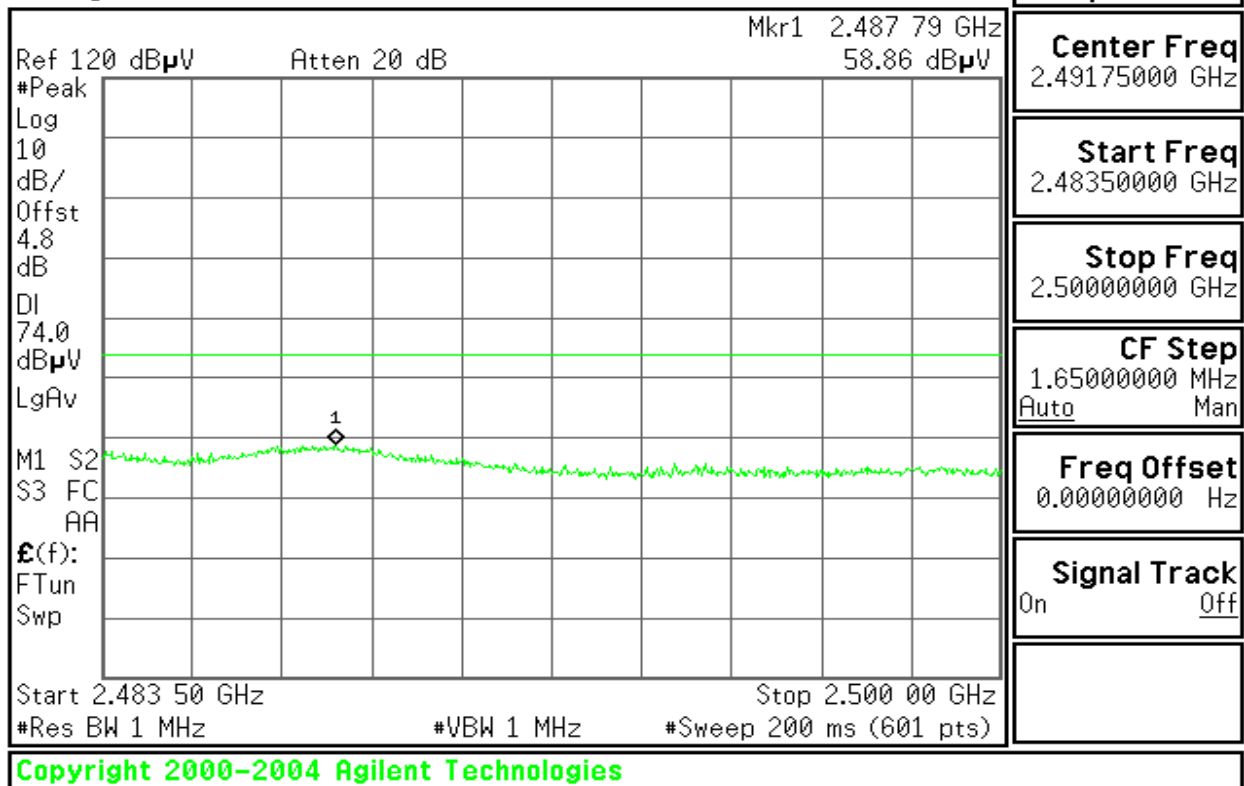
**AVG**

* Agilent 20:07:27 Jul 21, 2006

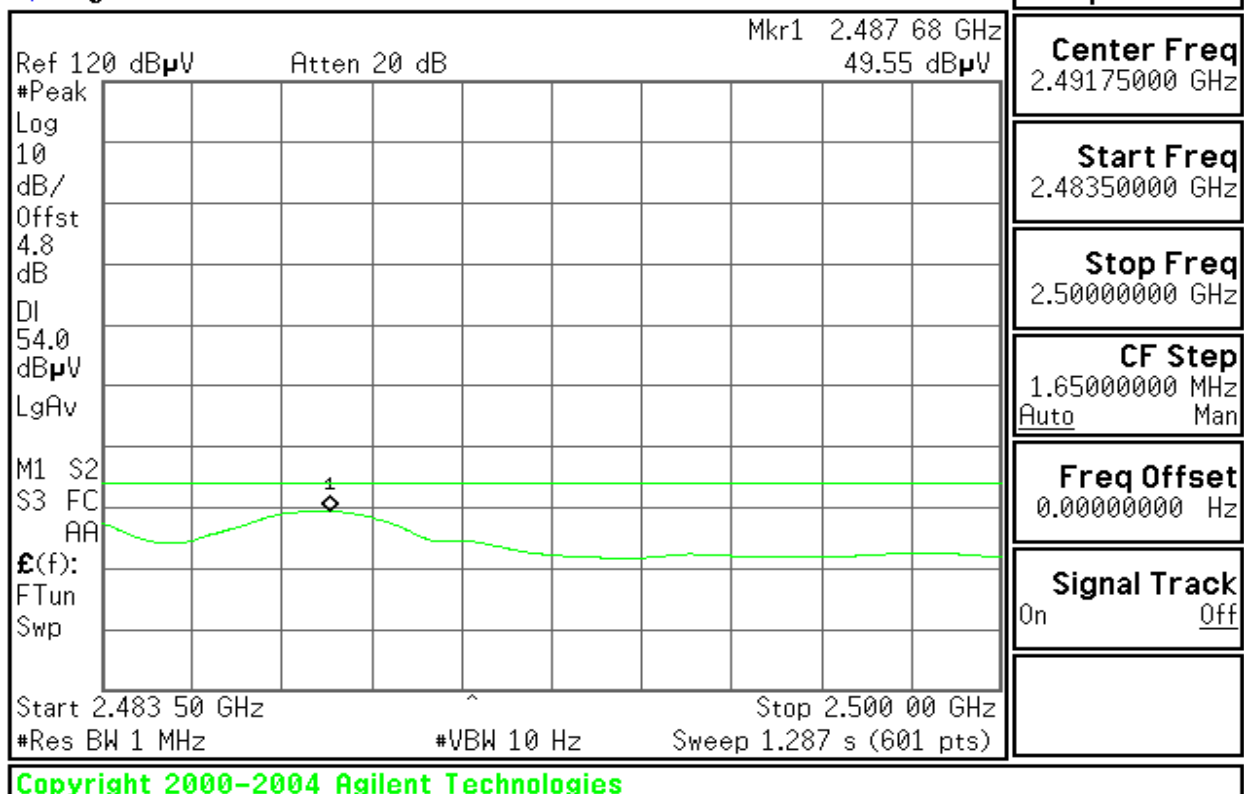


**RESTRICTED BANDEDGE (b Mode, High Channel, Vertical)****PEAK**

* Agilent 20:10:37 Jul 21, 2006

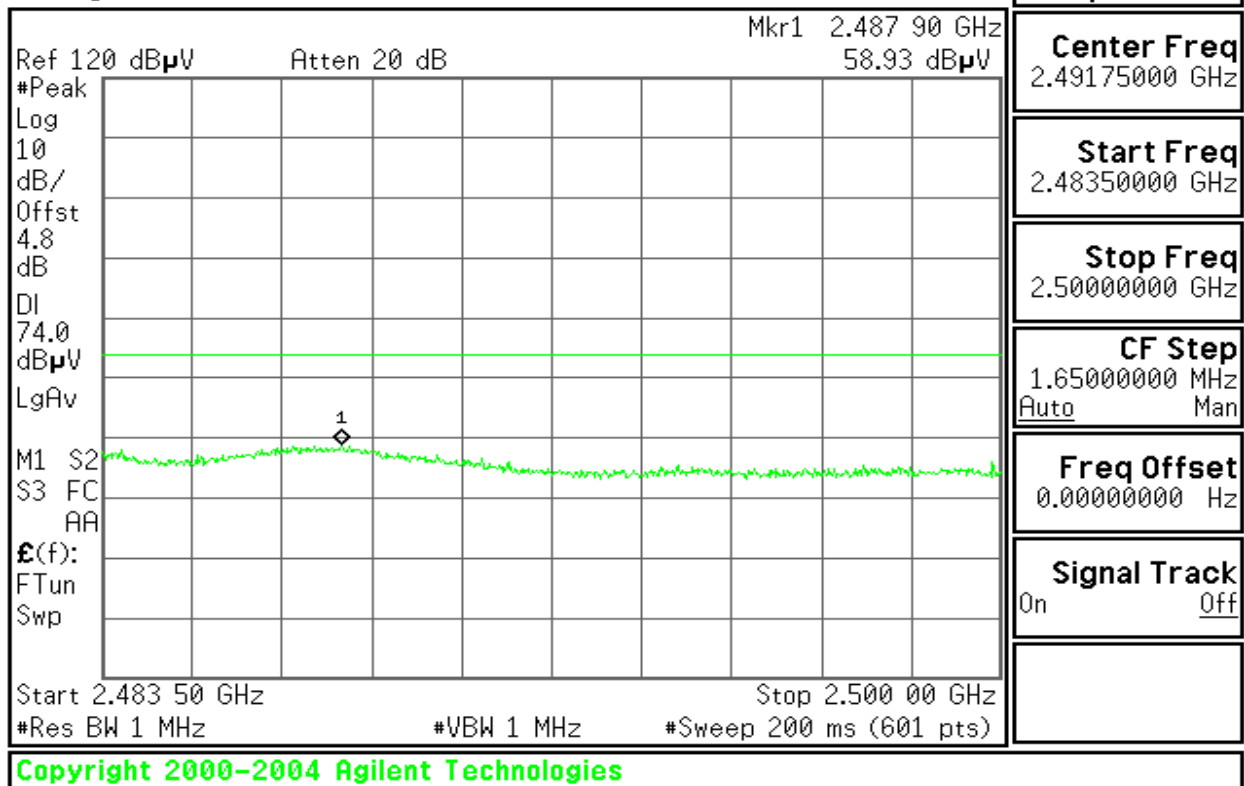
**AVG**

* Agilent 20:11:20 Jul 21, 2006

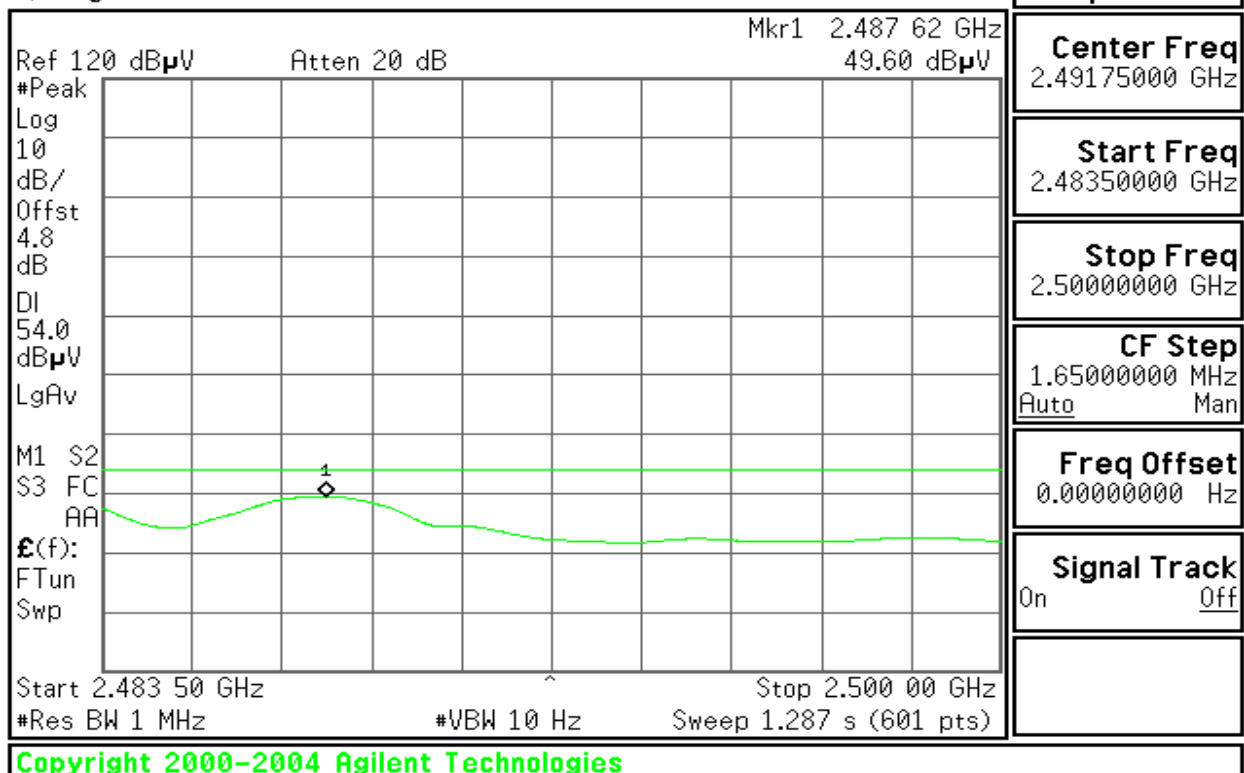


**RESTRICTED BANDEDGE (g 20M Mode, Low Channel, Horizontal)****PEAK**

* Agilent 20:27:29 Jul 21, 2006

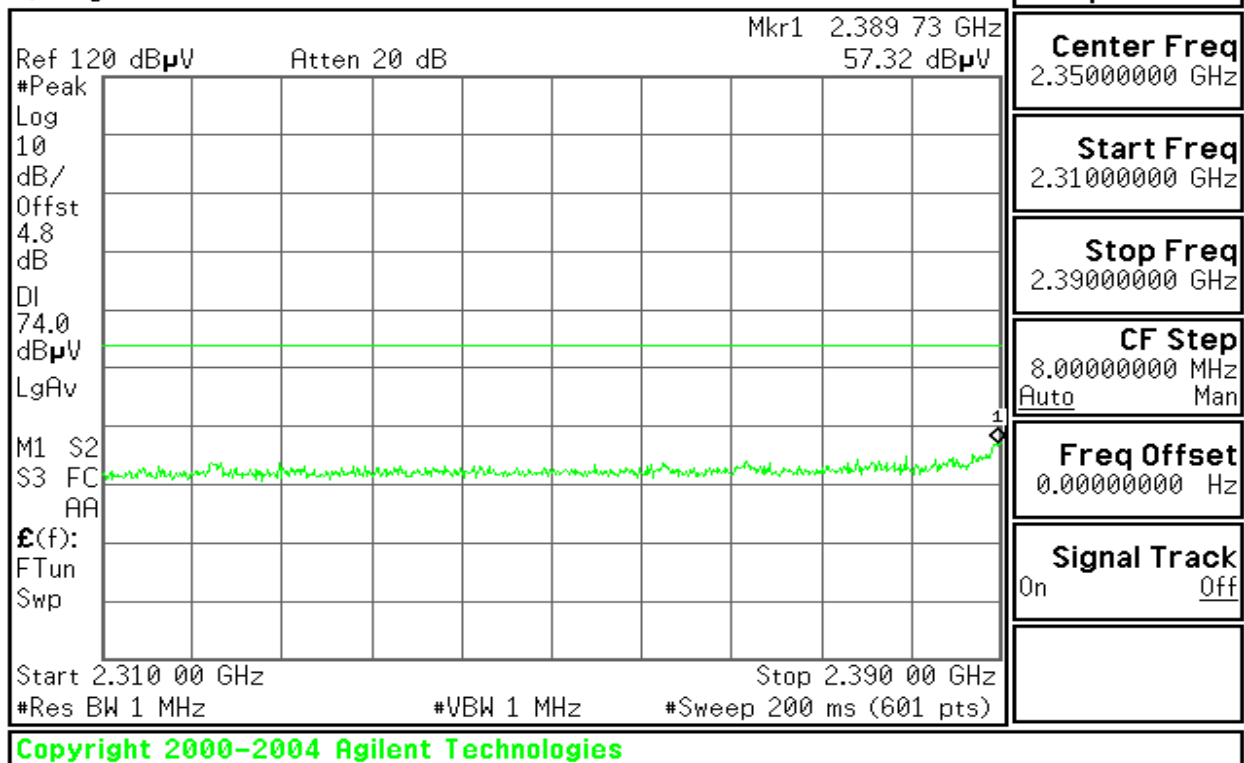
**AVG**

* Agilent 20:28:07 Jul 21, 2006

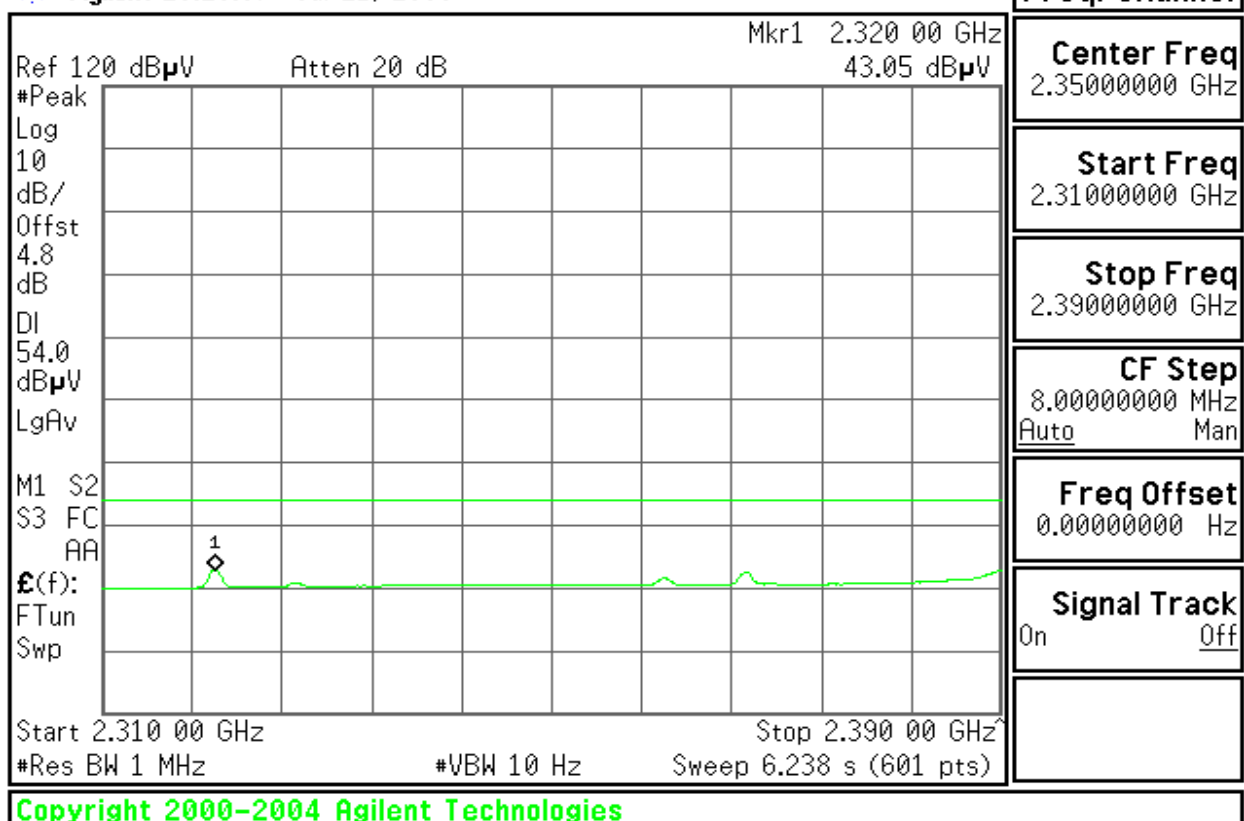


**RESTRICTED BANDEDGE (g 20M Mode, Low Channel, Vertical)****PEAK**

Agilent 20:29:41 Jul 21, 2006

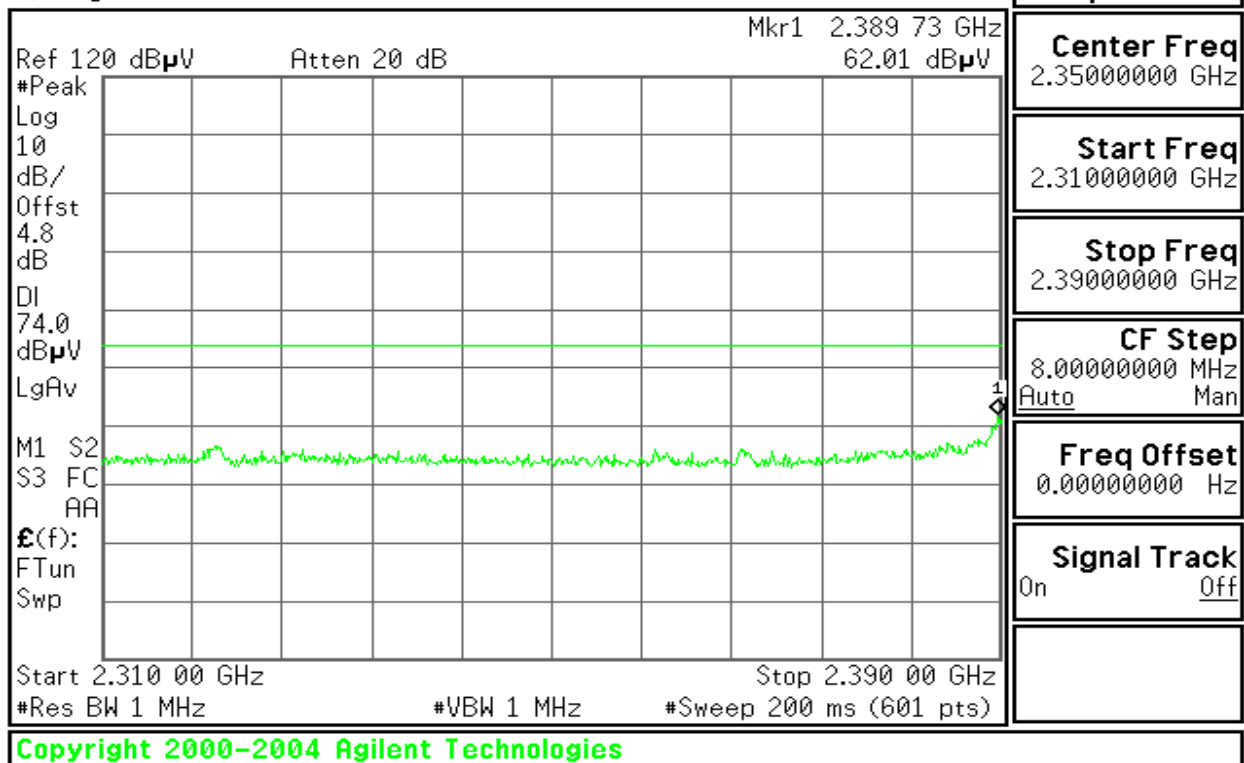
**AVG**

Agilent 20:28:07 Jul 21, 2006

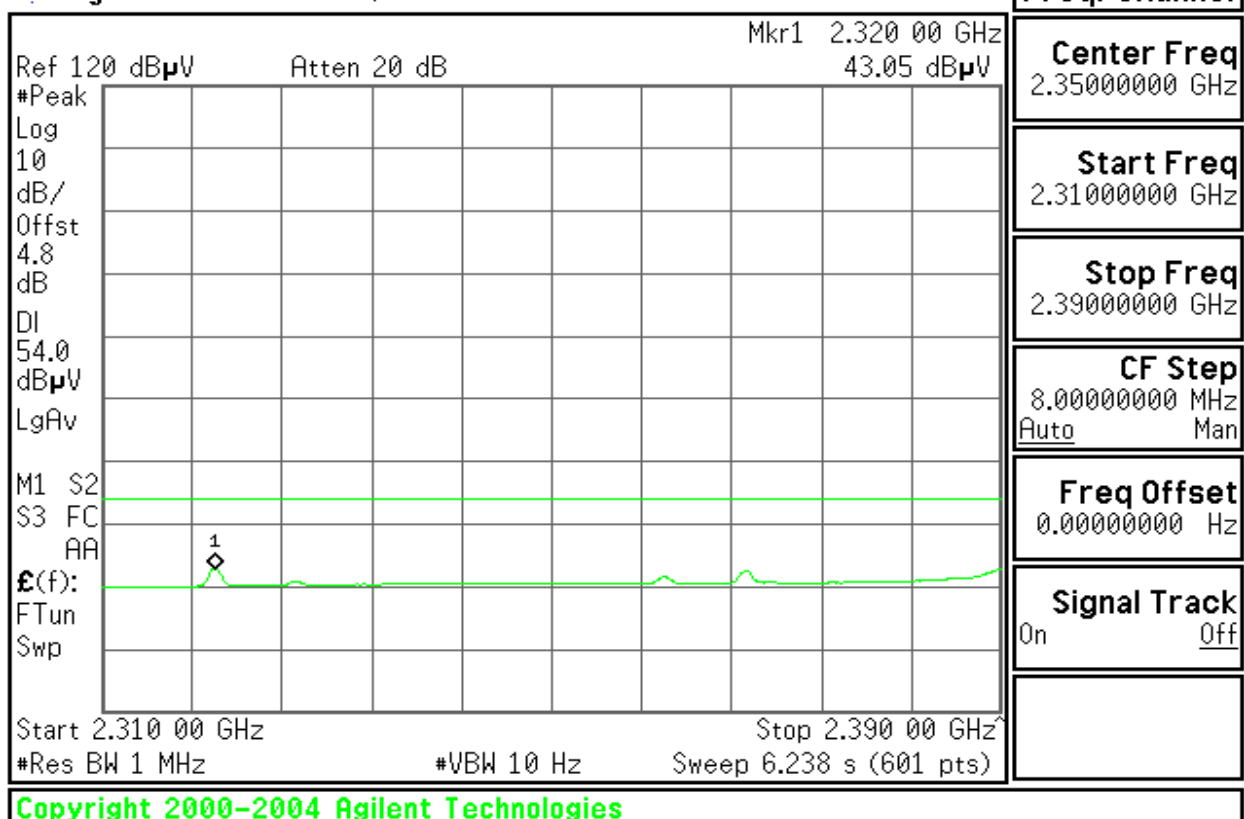


**RESTRICTED BANDEDGE (g 20M Mode, High Channel, Horizontal)****PEAK**

* Agilent 20:19:58 Jul 21, 2006

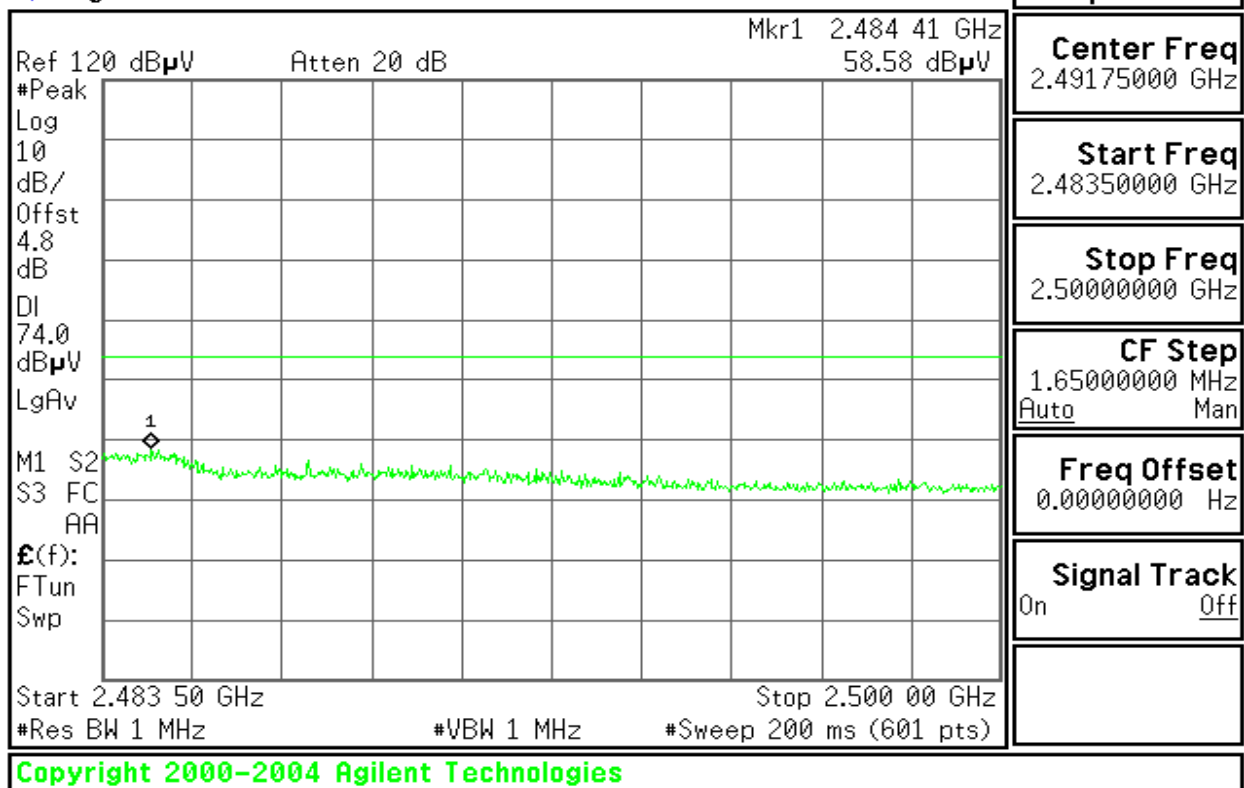
**AVG**

* Agilent 20:20:30 Jul 21, 2006

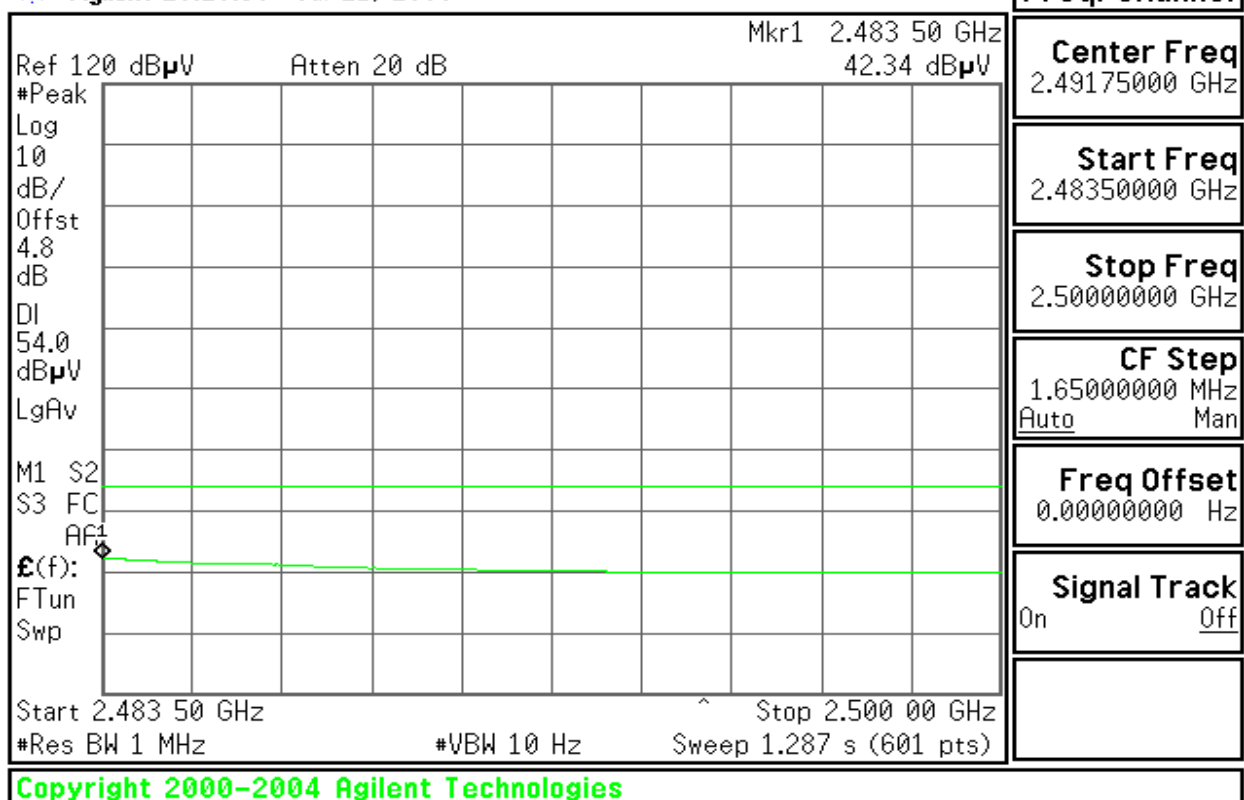


**RESTRICTED BANDEDGE (g 20M Mode, High Channel, Vertical)****PEAK**

* Agilent 20:16:36 Jul 21, 2006

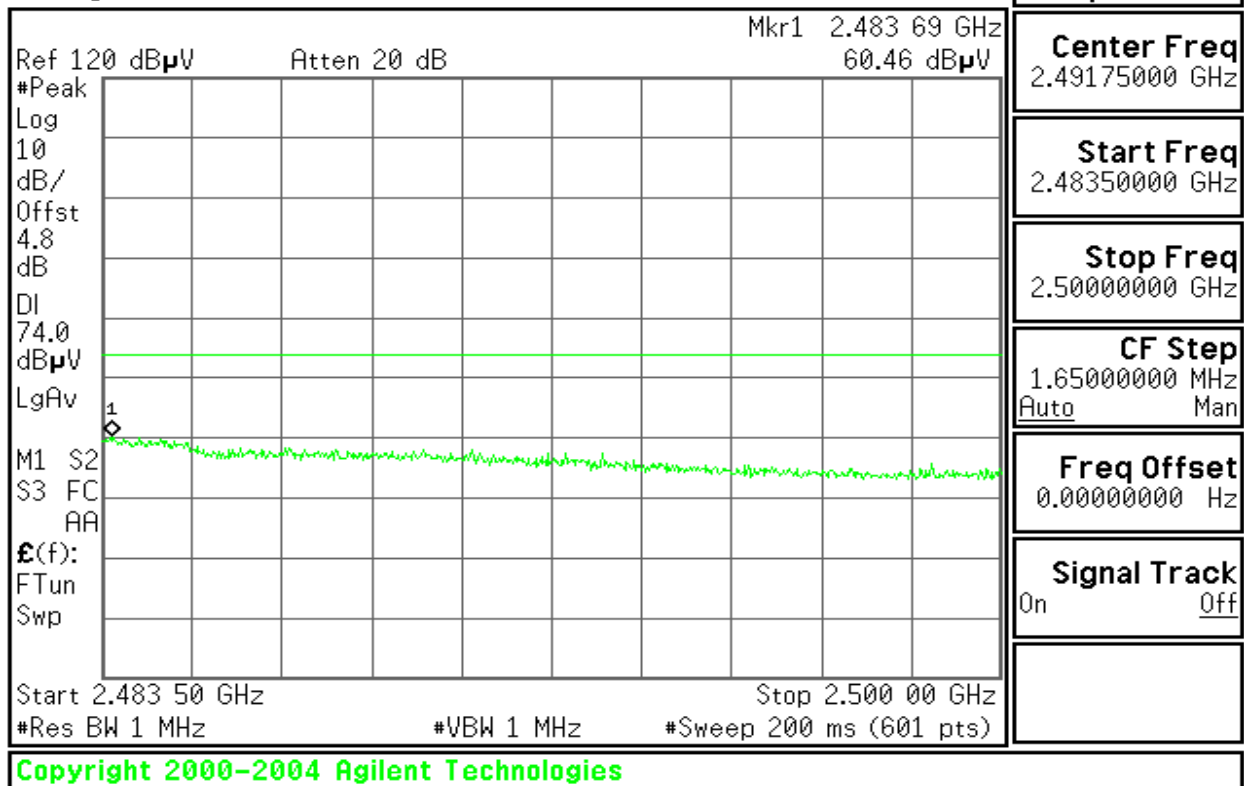
**AVG**

* Agilent 20:17:10 Jul 21, 2006

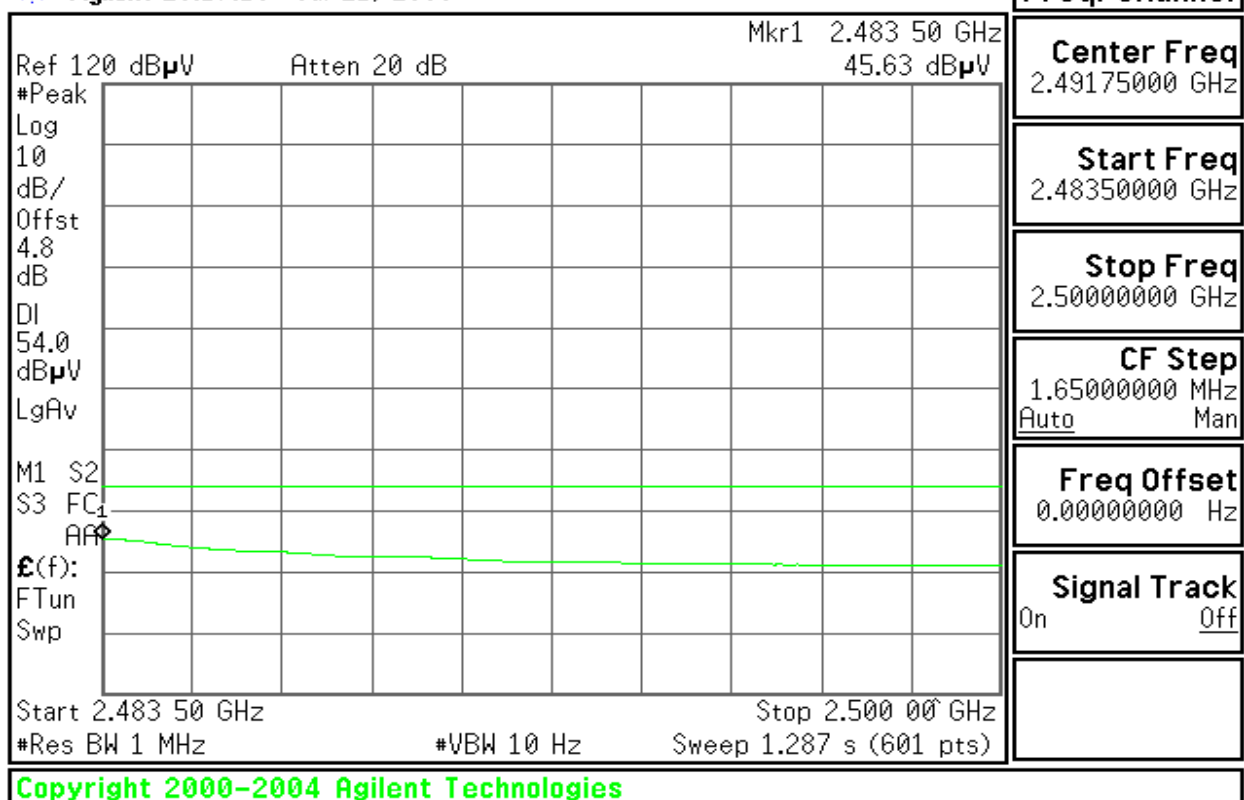

**RESTRICTED BANDEDGE (g 40M Mode, Low Channel, Horizontal)****PEAK**

* Agilent 14:14:57 Aug 3, 2006

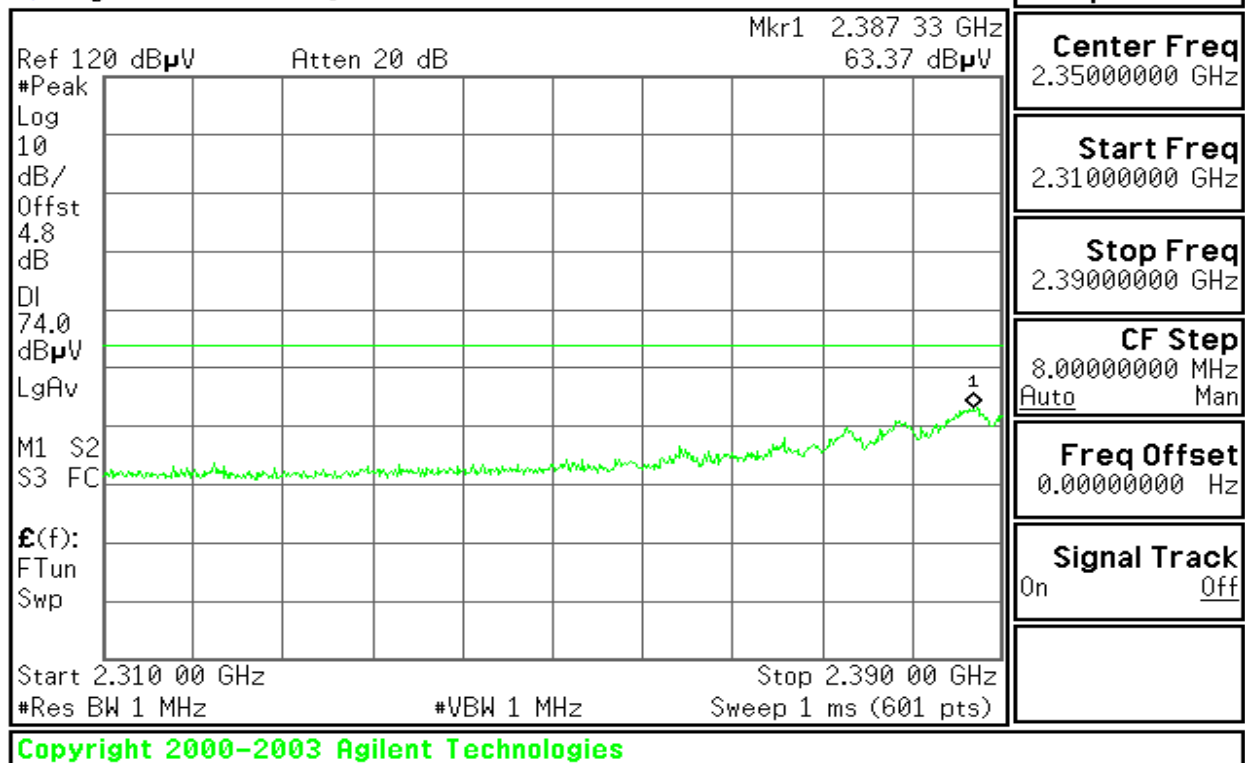
**AVG**

* Agilent 14:15:32 Aug 3, 2006




**RESTRICTED BANDEDGE (g 40M Mode, Low Channel, Vertical)****PEAK**

* Agilent 14:17:41 Aug 3, 2006

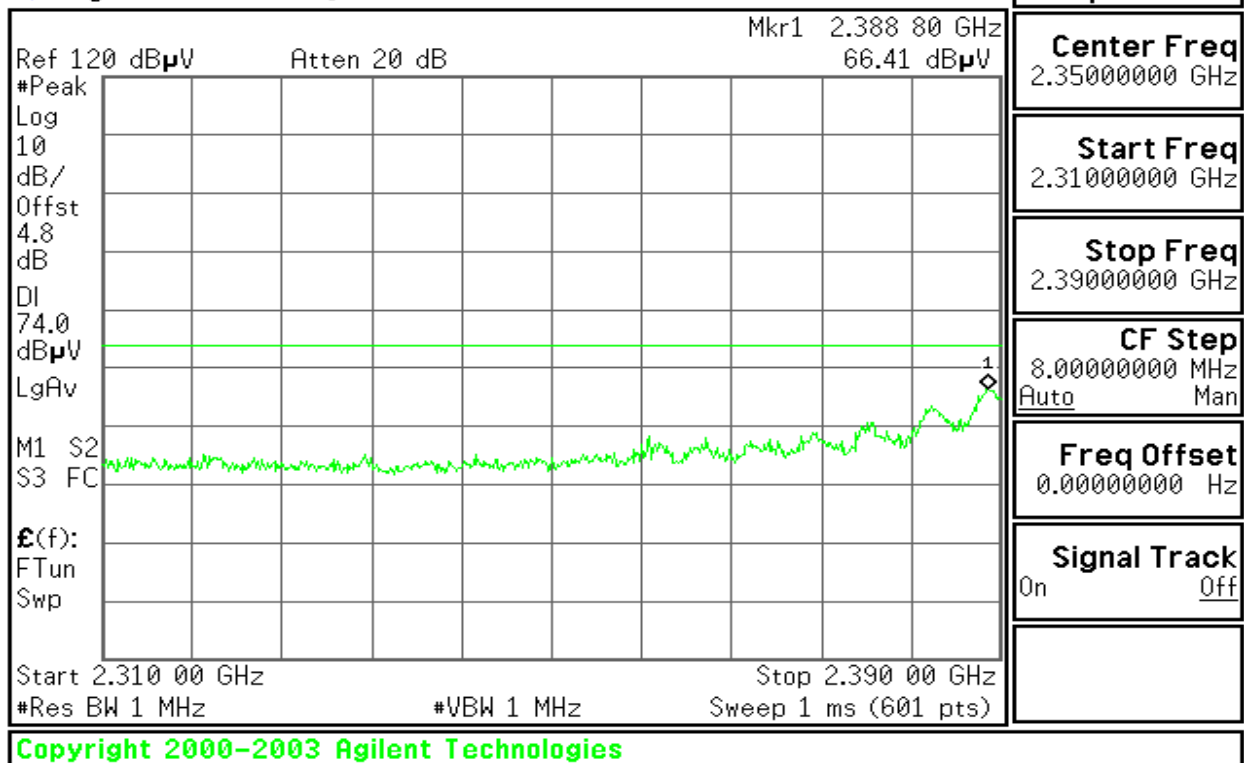
**AVG**

* Agilent 14:16:55 Aug 3, 2006

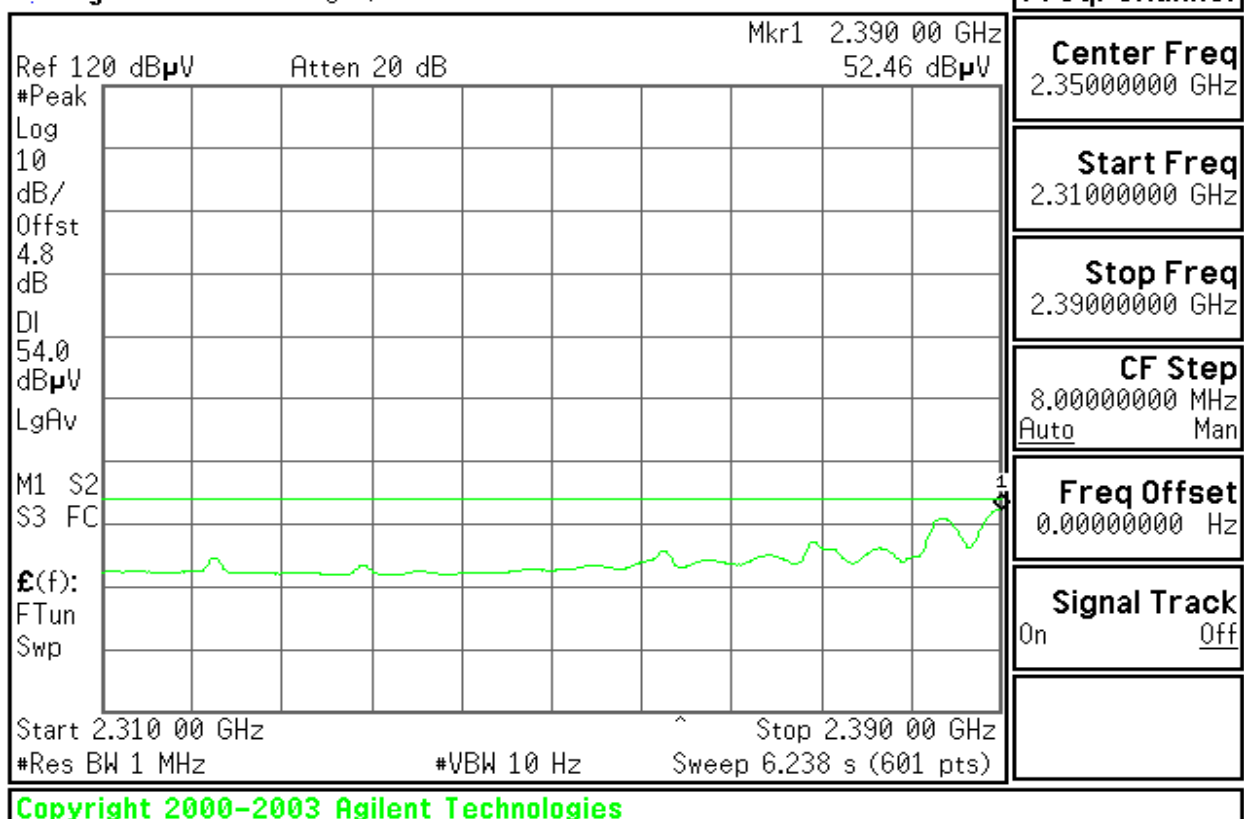


**RESTRICTED BANDEDGE (g 40M Mode, High Channel, Horizontal)****PEAK**

* Agilent 14:26:55 Aug 3, 2006

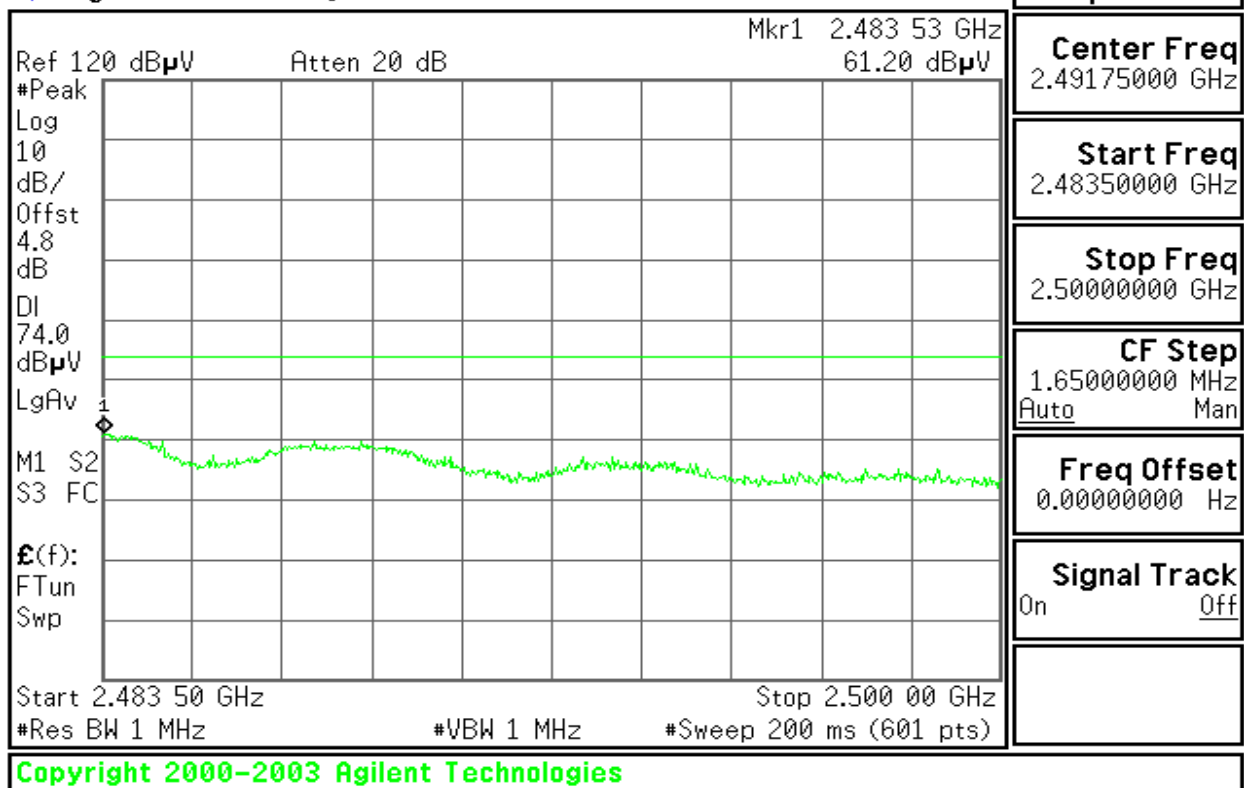
**AVG**

* Agilent 14:27:39 Aug 3, 2006

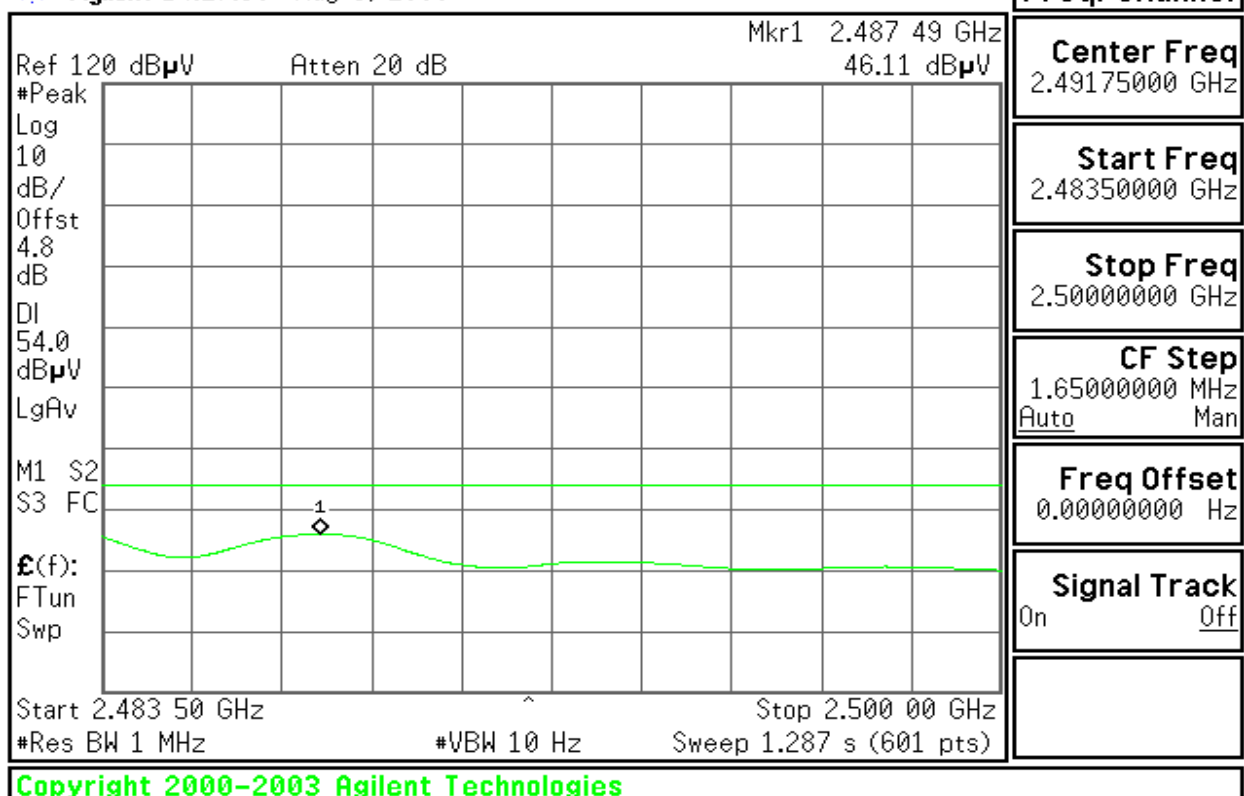


**RESTRICTED BANDEDGE (g 40M Mode, High Channel, Vertical)****PEAK**

* Agilent 14:24:19 Aug 3, 2006

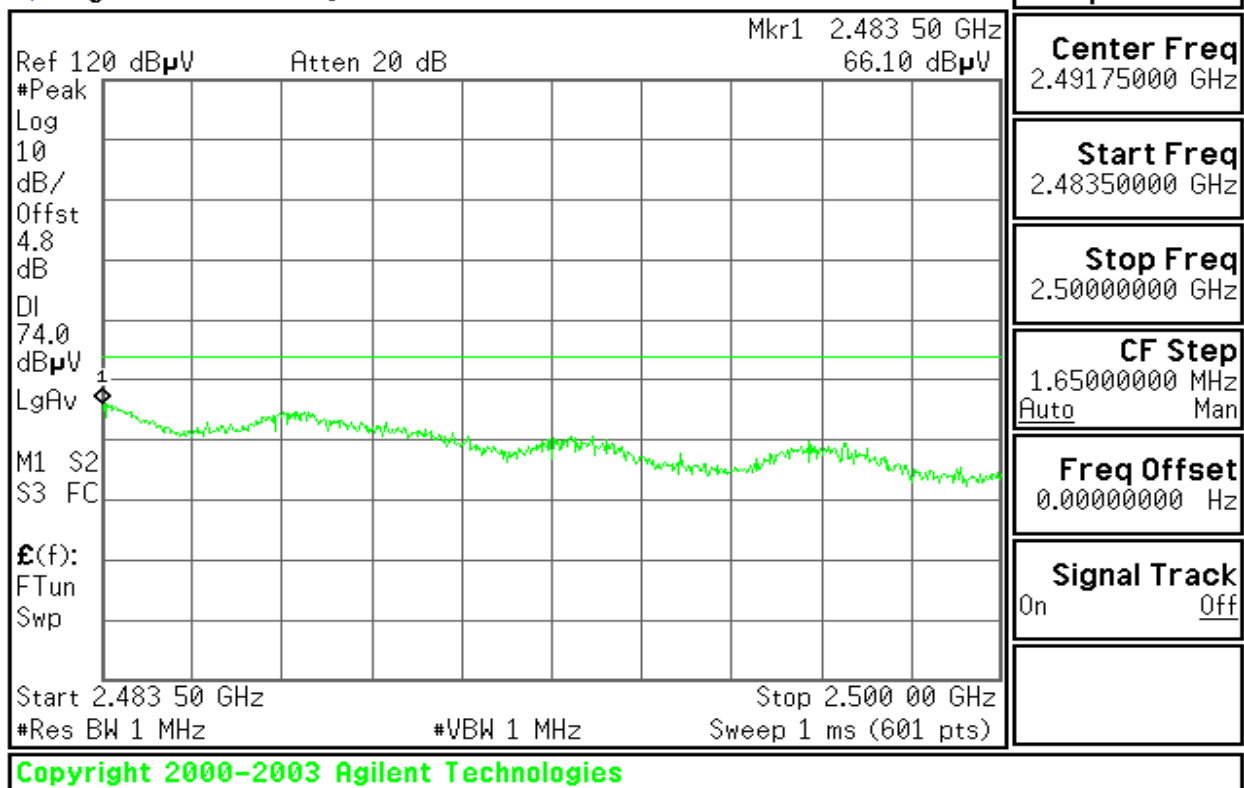
**AVG**

* Agilent 14:23:33 Aug 3, 2006

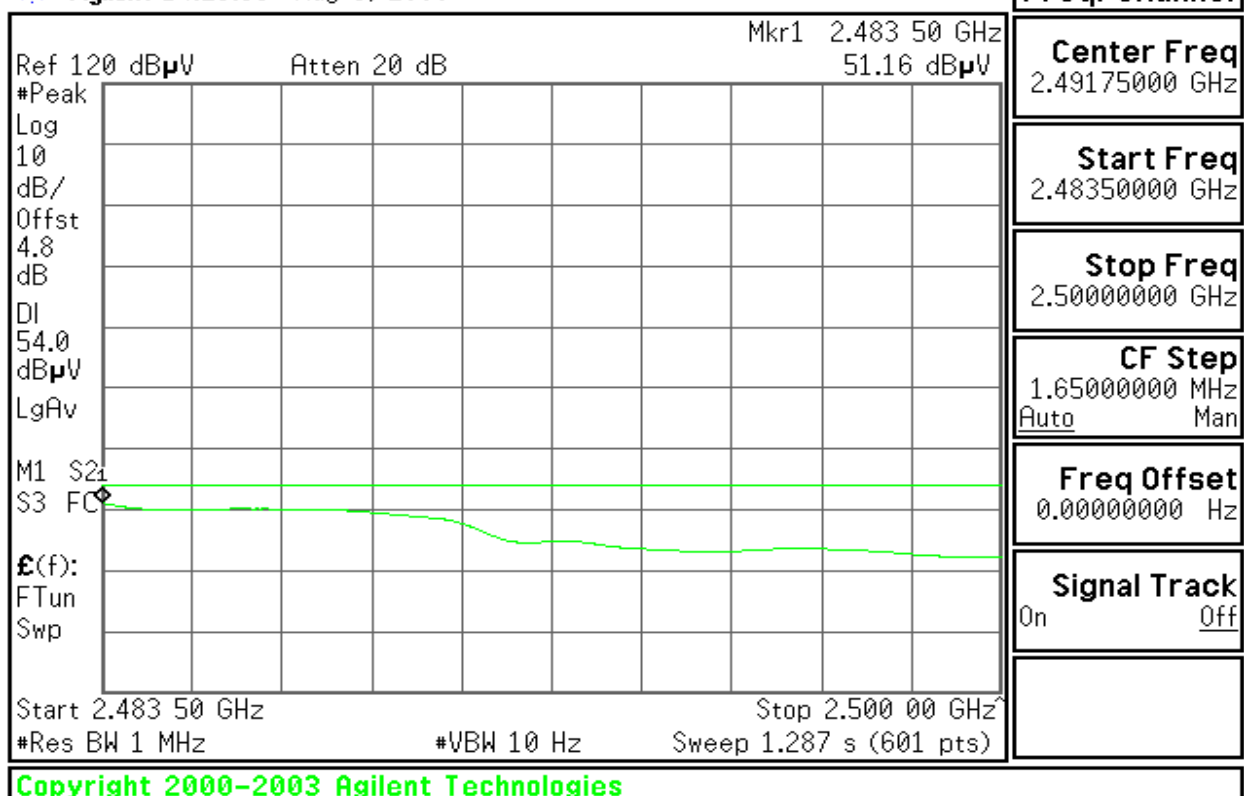


**RESTRICTED BANDEDGE** (draft 802.11n Standard-20 MHz Channel mode, Low Channel, Horizontal)**PEAK**

* Agilent 20:40:55 Jul 21, 2006

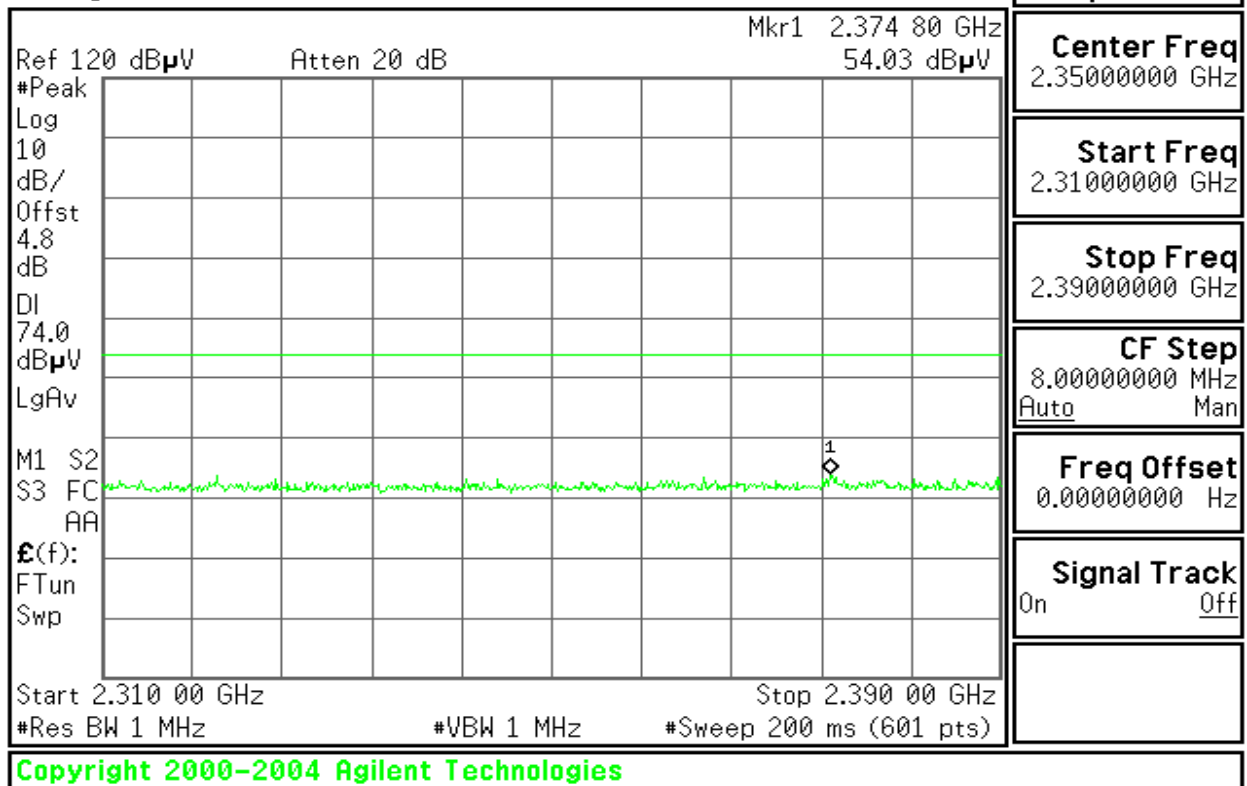
**AVG**

* Agilent 20:41:28 Jul 21, 2006

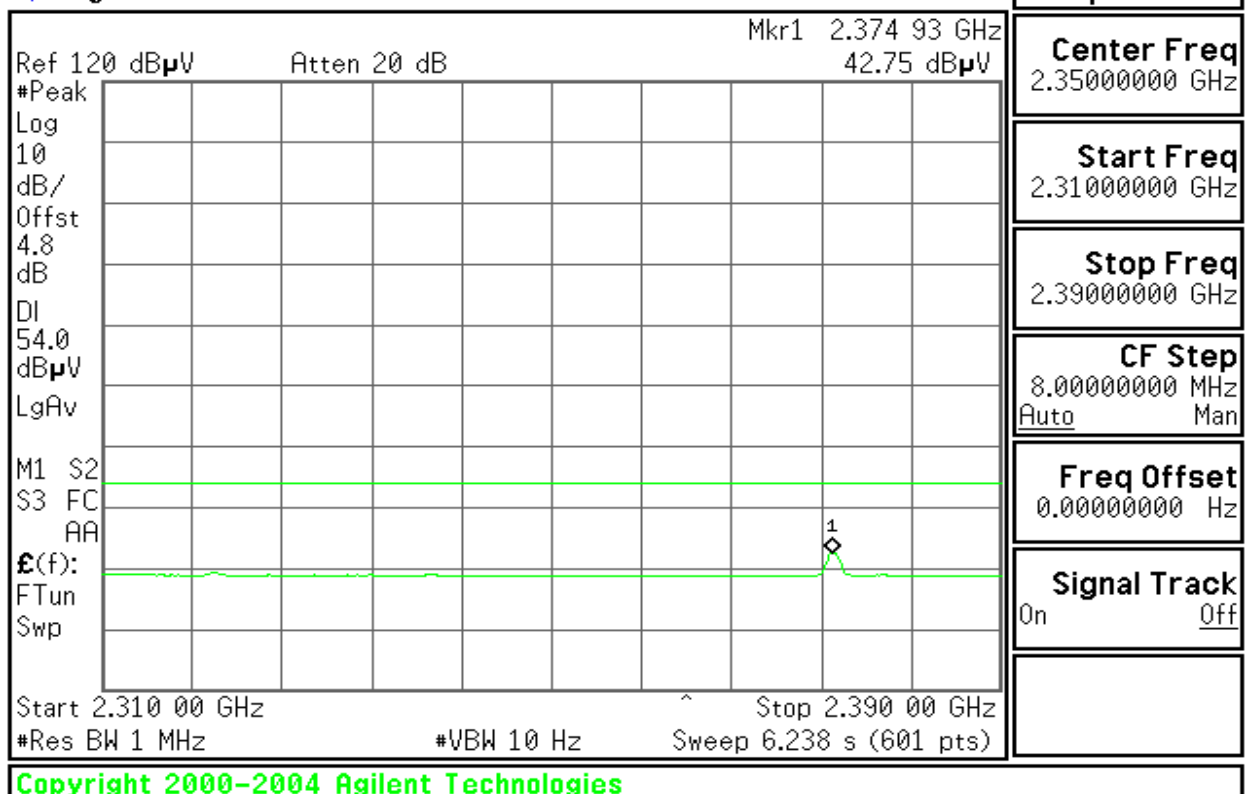


**RESTRICTED BANDEDGE** (draft 802.11n Standard-20 MHz Channel mode, Low Channel, Vertical)**PEAK**

* Agilent 20:36:41 Jul 21, 2006

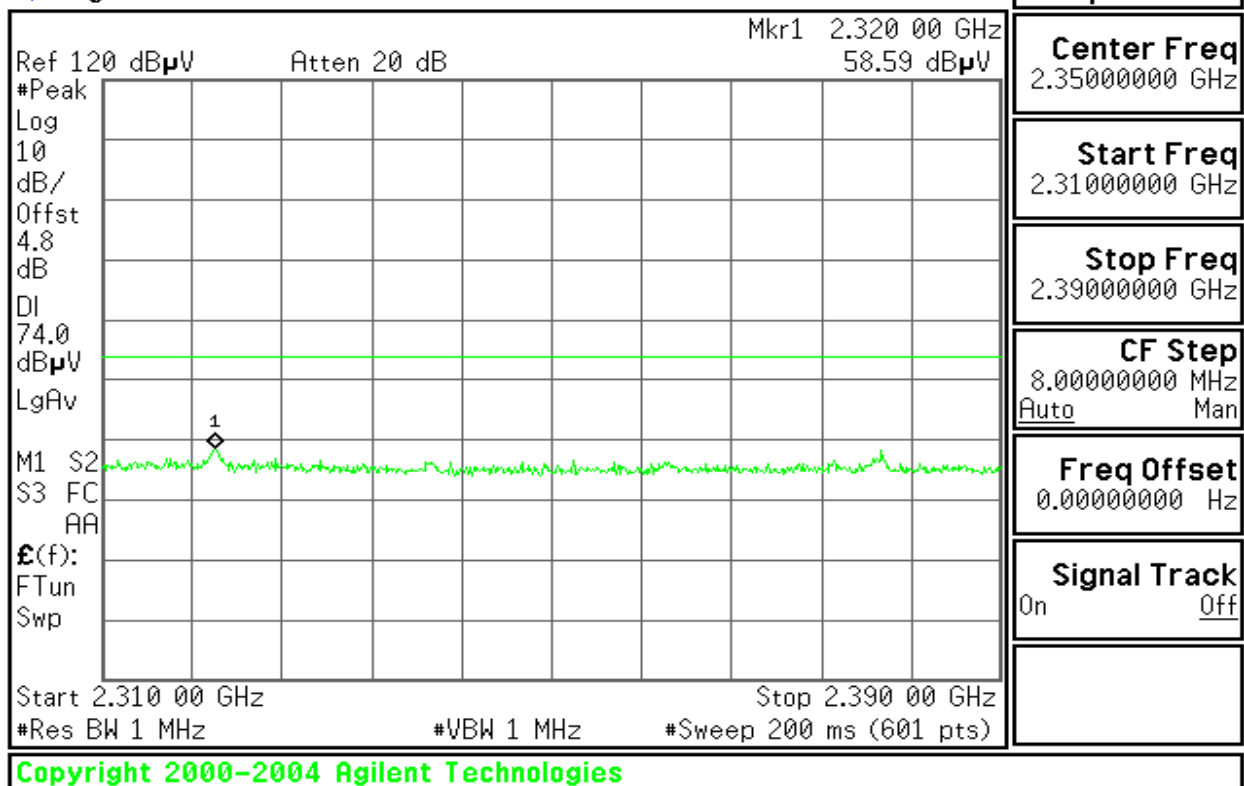
**AVG**

* Agilent 20:37:24 Jul 21, 2006

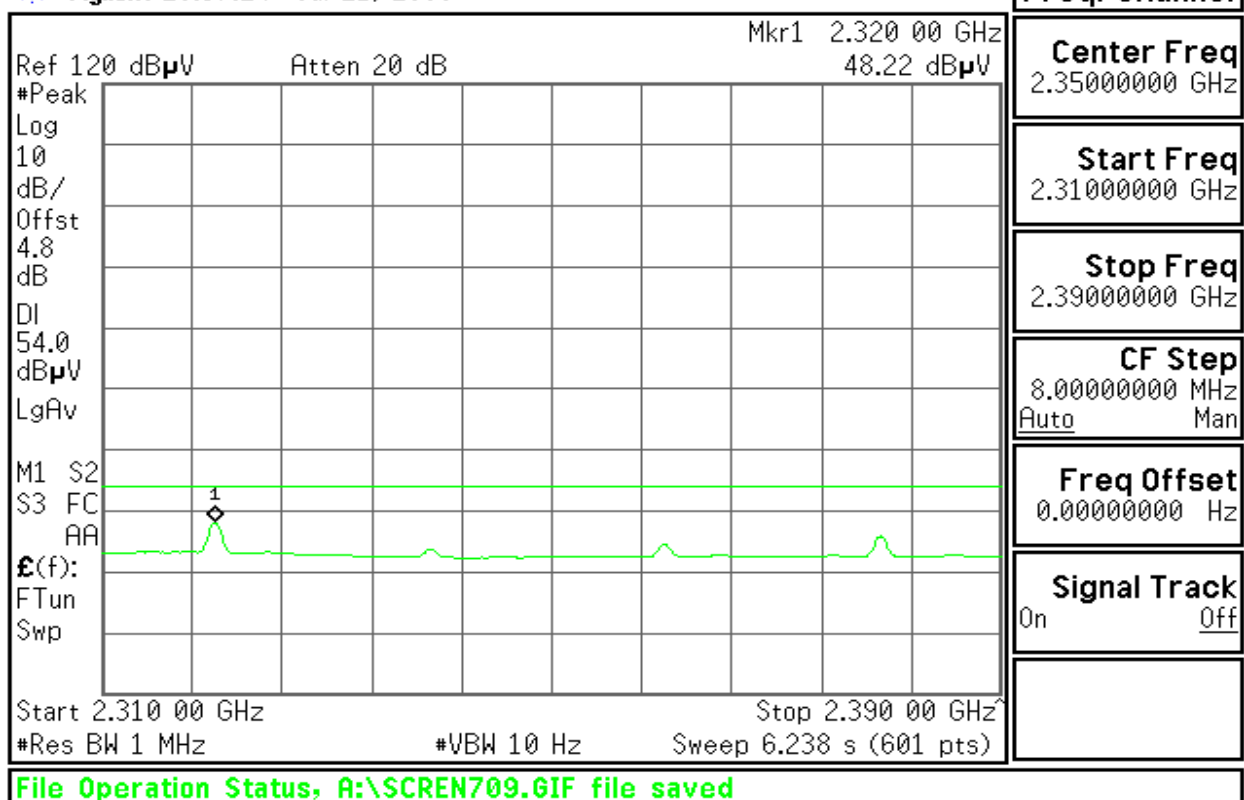


**RESTRICTED BANDEDGE** (draft 802.11n Standard-20 MHz Channel mode, High Channel, Horizontal)**PEAK**

* Agilent 20:40:55 Jul 21, 2006

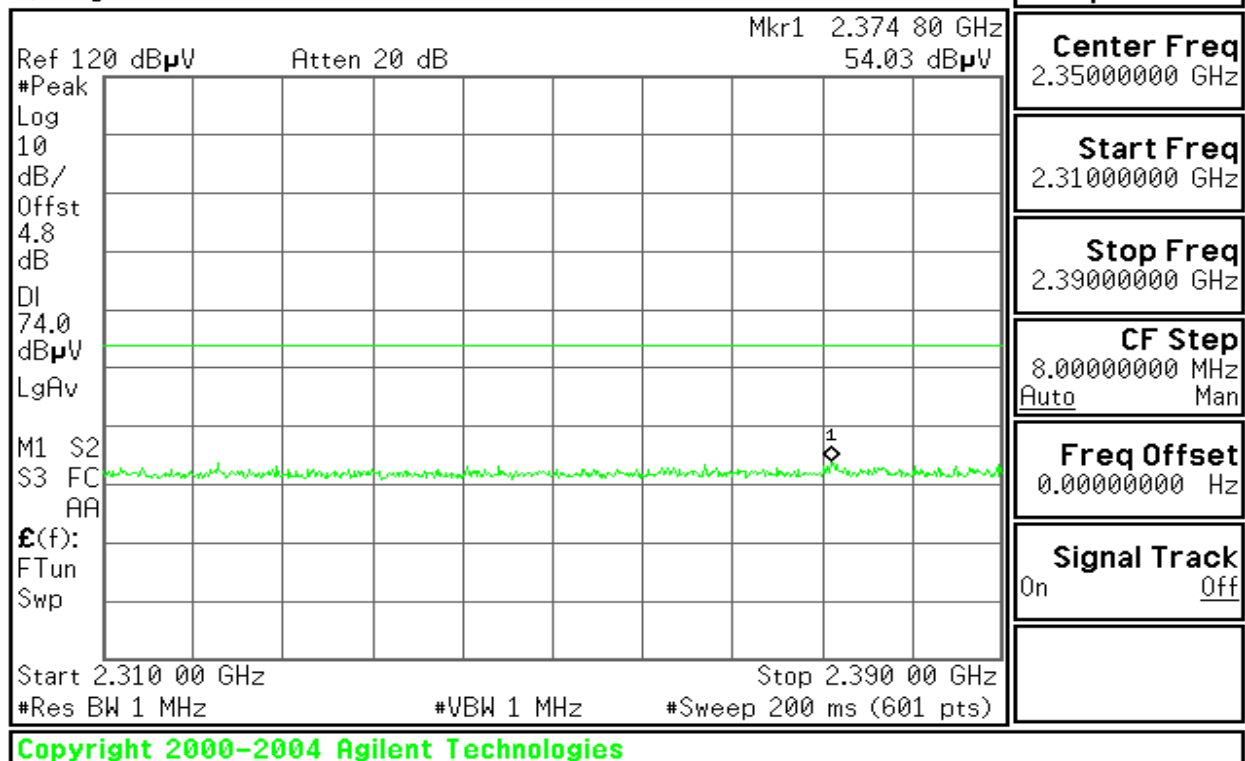
**AVG**

* Agilent 20:41:28 Jul 21, 2006

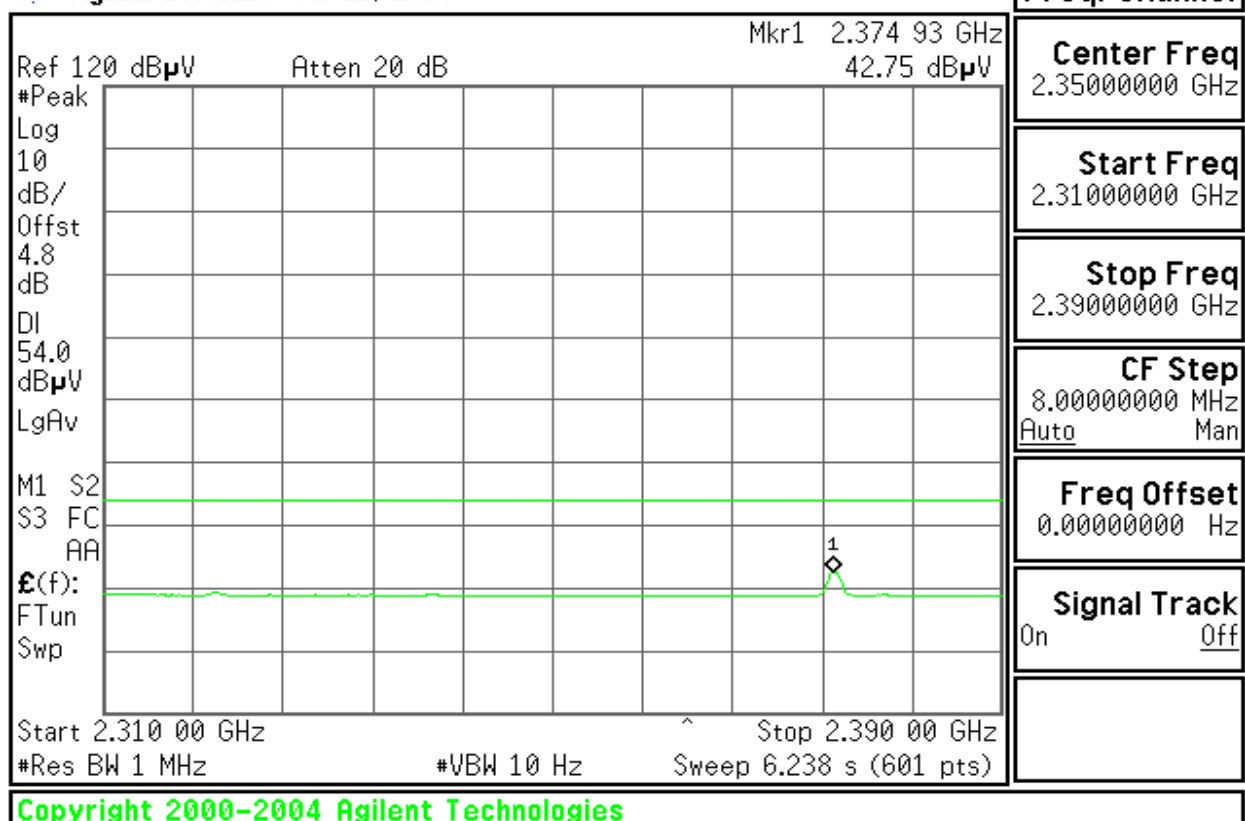


**RESTRICTED BANDEDGE** (draft 802.11n Standard-20 MHz Channel mode, High Channel, Vertical)**PEAK**

* Agilent 20:36:41 Jul 21, 2006

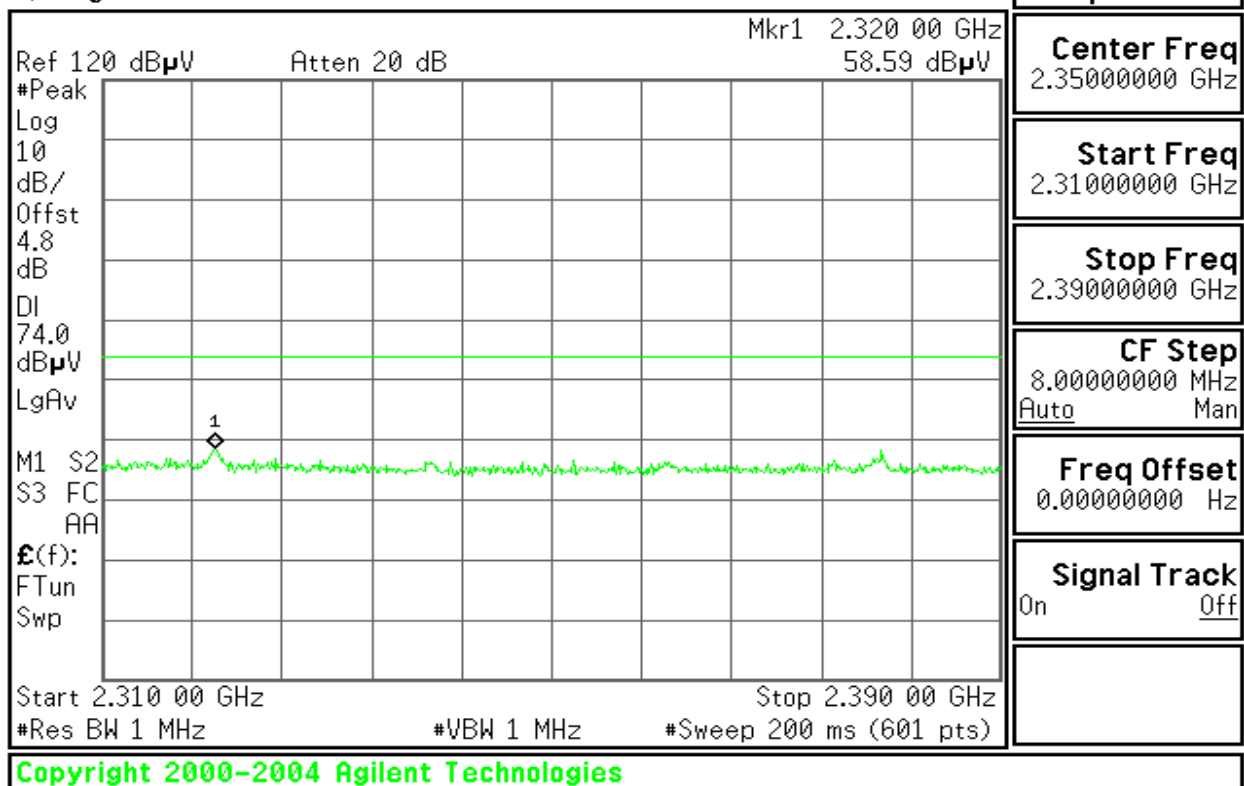
**AVG**

* Agilent 20:37:24 Jul 21, 2006

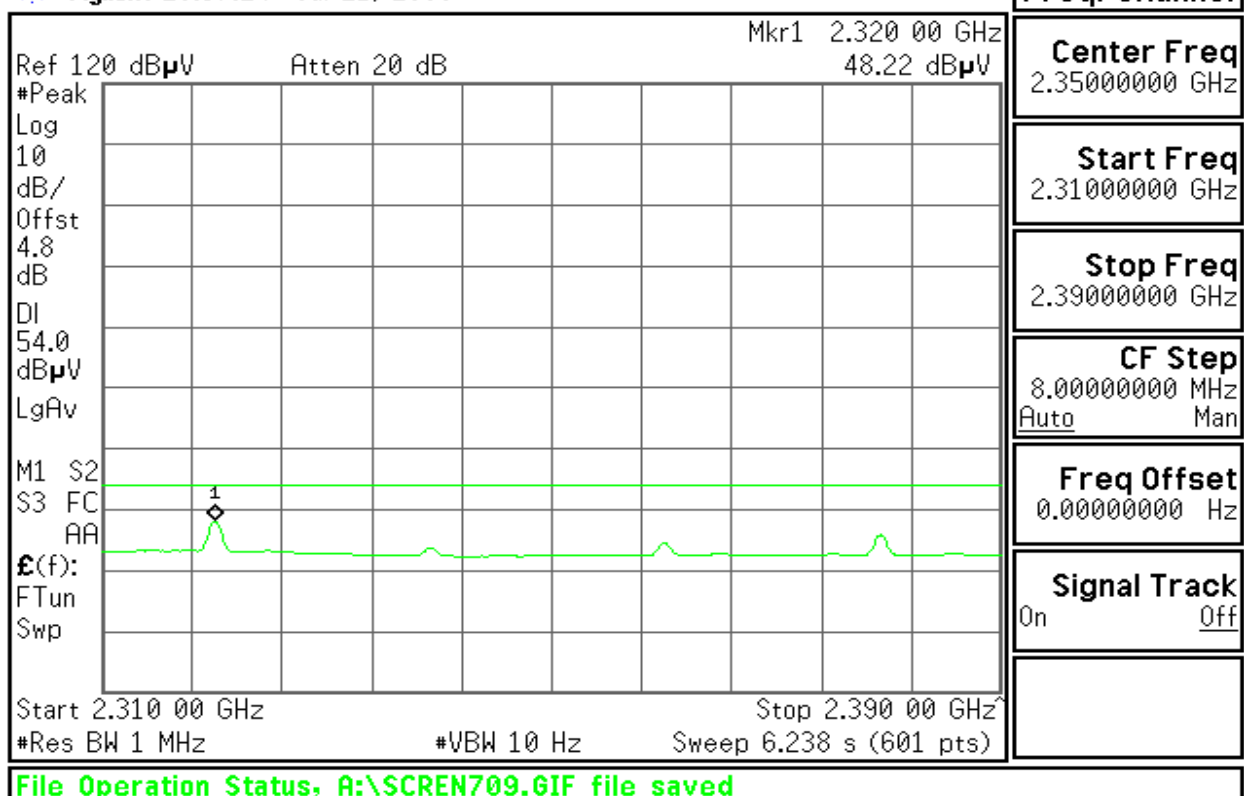


**RESTRICTED BANDEDGE (draft 802.11n Wide -40 MHz Channel mode, Low Channel, Horizontal)****PEAK**

* Agilent 09:34:32 Aug 3, 2006

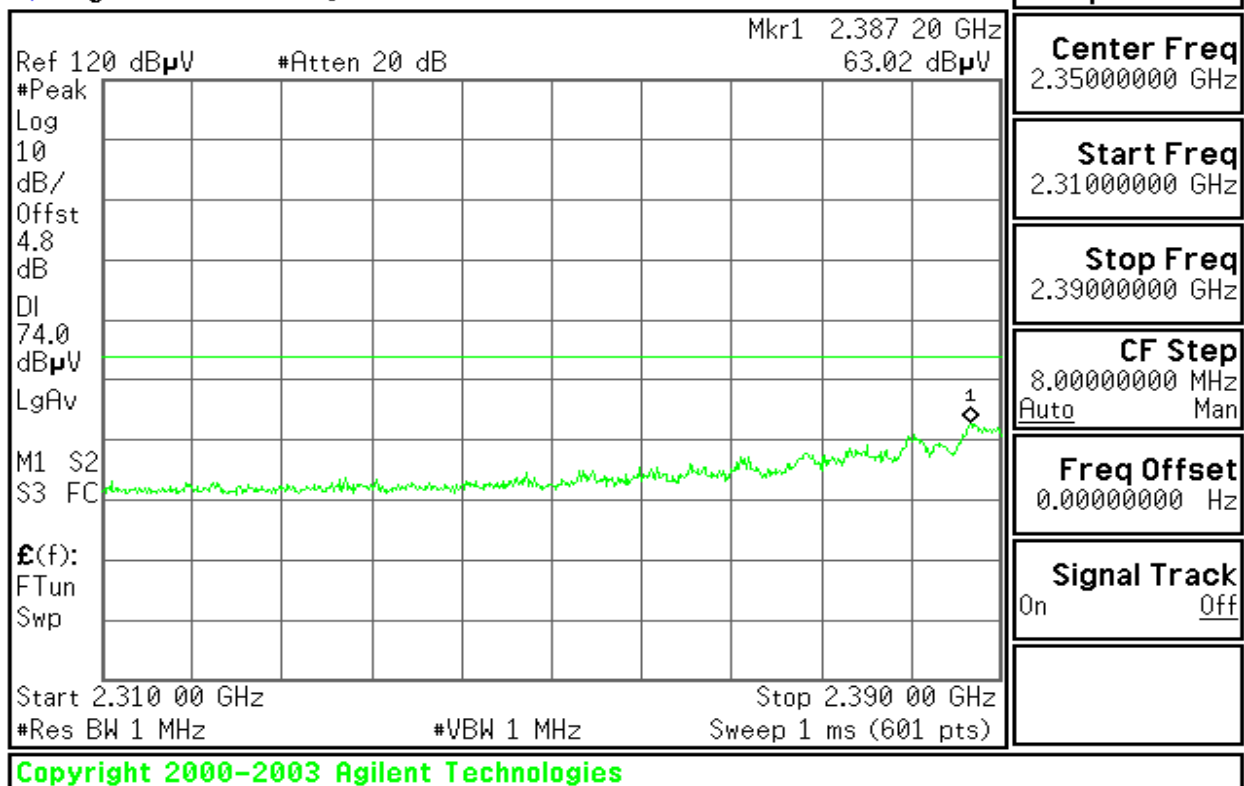
**AVG**

* Agilent 09:35:11 Aug 3, 2006

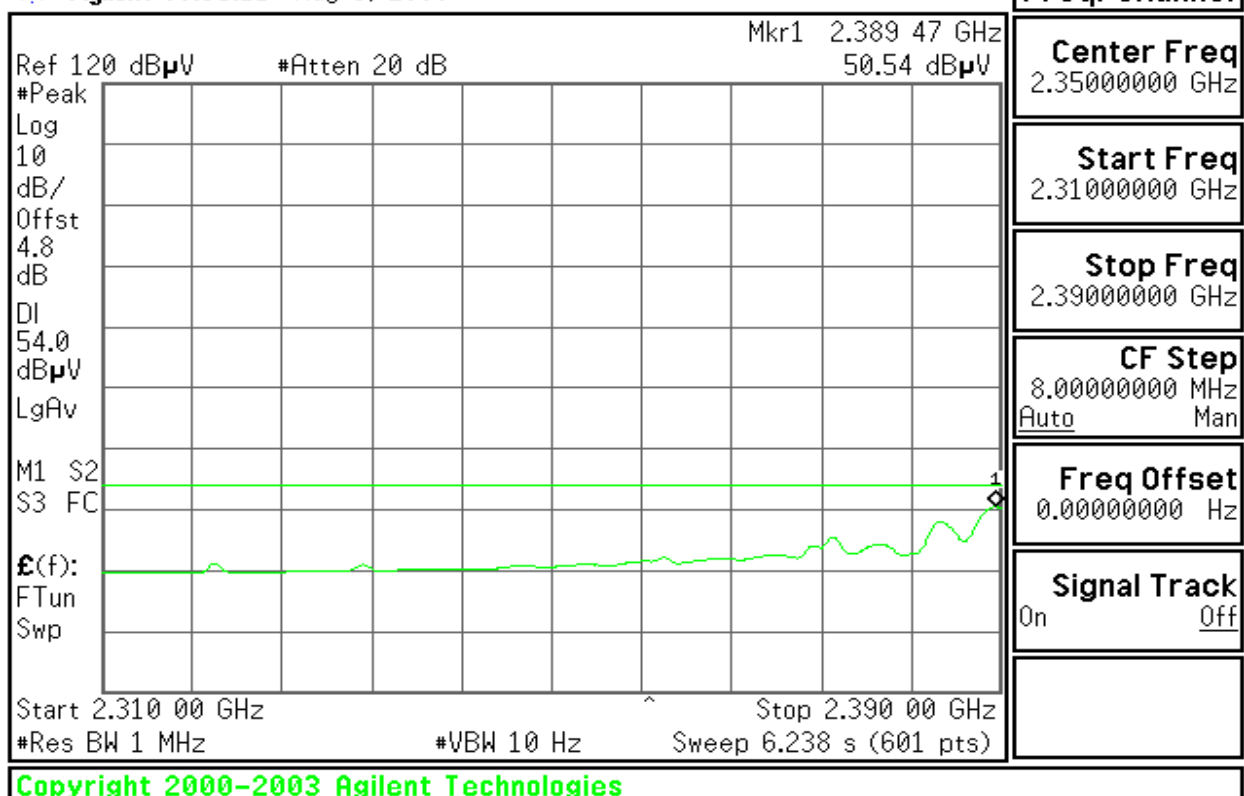


**RESTRICTED BANDEDGE (draft 802.11n Wide -40 MHz Channel mode, Low Channel, Vertical)****PEAK**

* Agilent 09:39:38 Aug 3, 2006

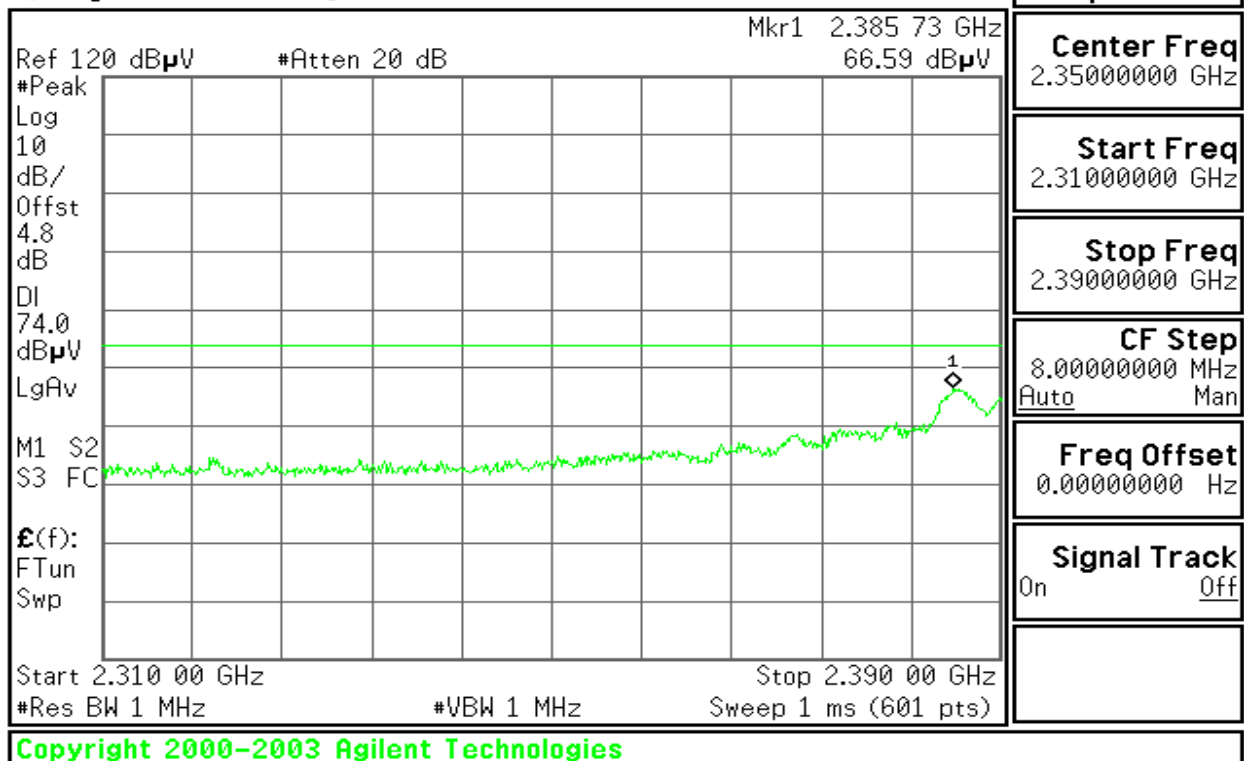
**AVG**

* Agilent 09:41:35 Aug 3, 2006

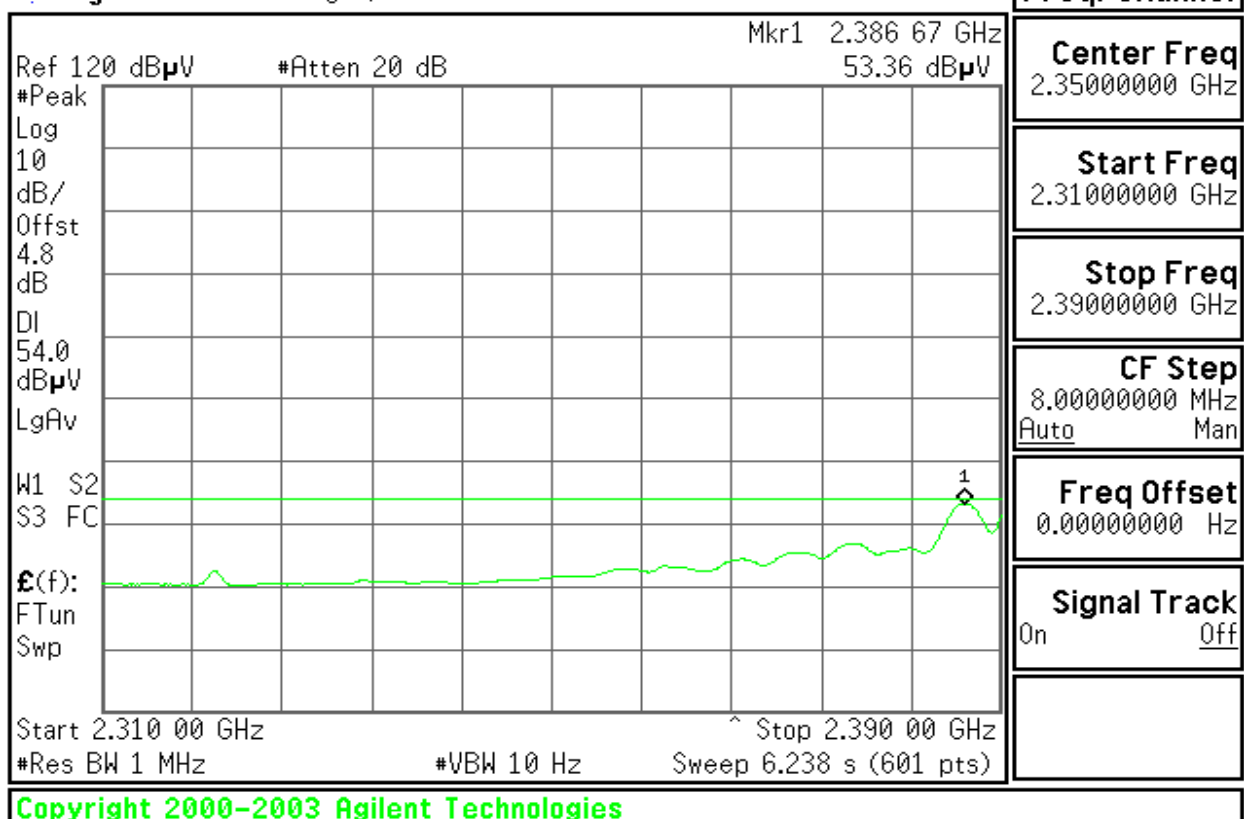


**RESTRICTED BANDEDGE (draft 802.11n Wide -40 MHz Channel mode, High Channel, Horizontal)****PEAK**

* Agilent 09:52:23 Aug 3, 2006

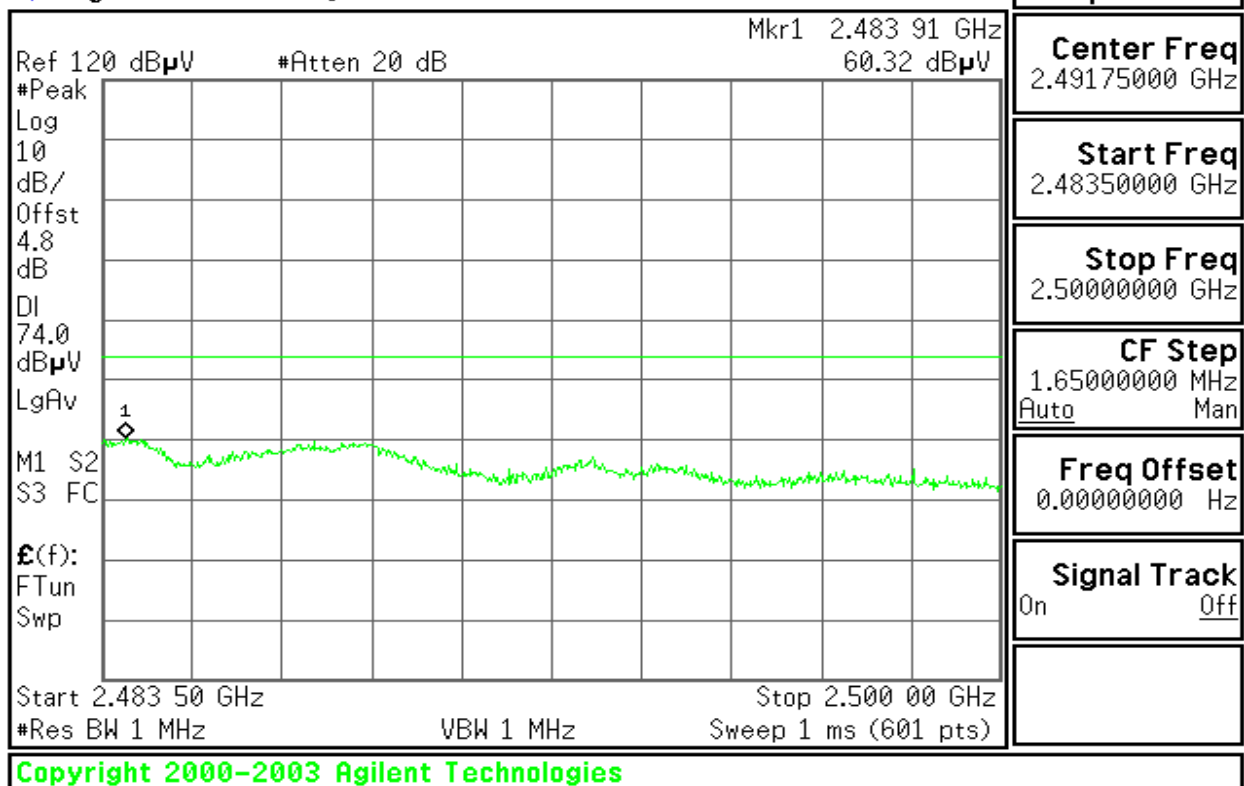
**AVG**

* Agilent 09:52:59 Aug 3, 2006

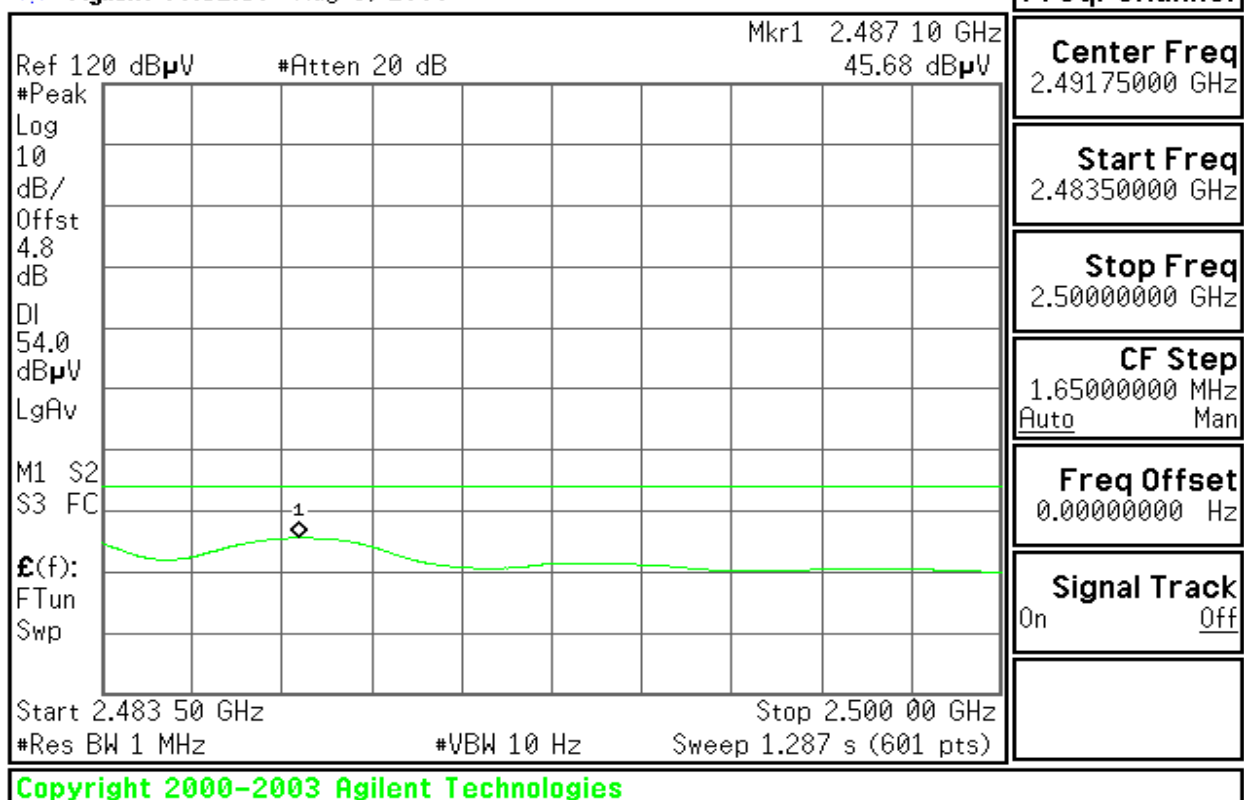


**RESTRICTED BANDEDGE (draft 802.11n Wide -40 MHz Channel mode, High Channel, Vertical)****PEAK**

* Agilent 09:49:46 Aug 3, 2006

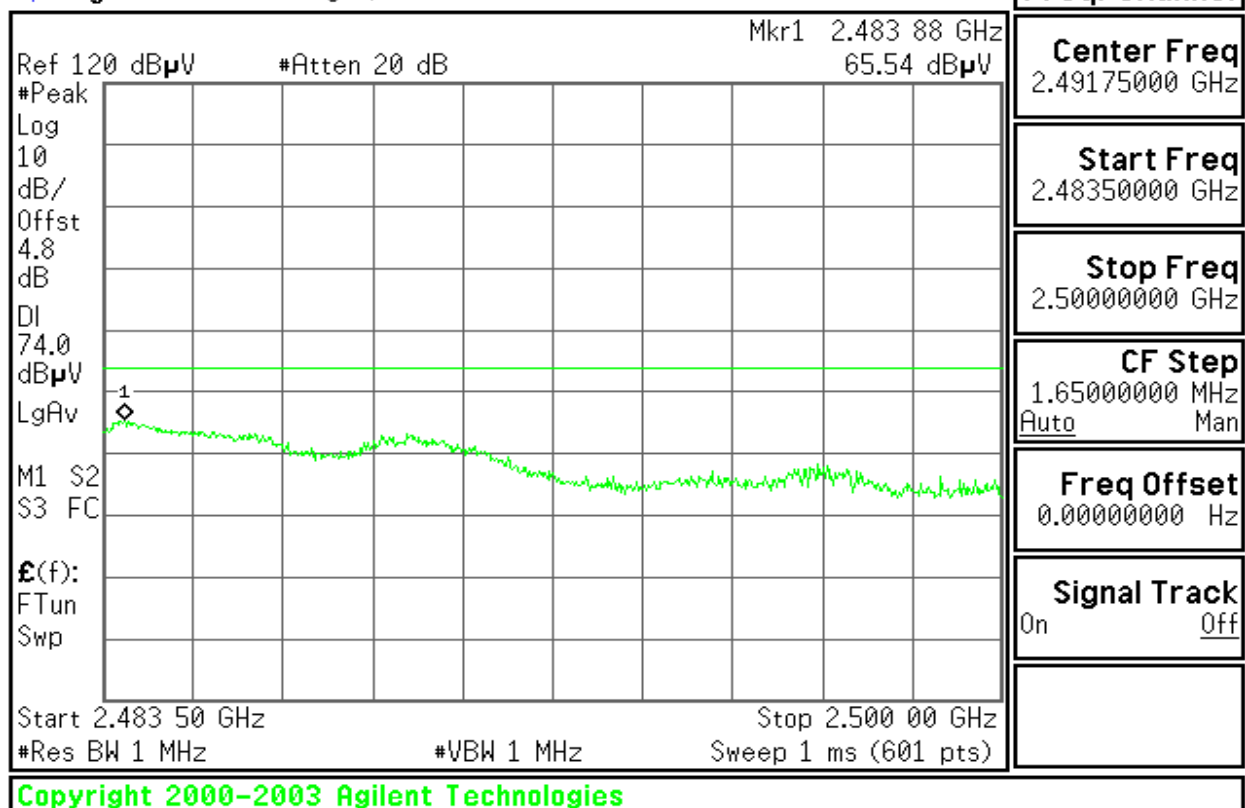**AVG**

* Agilent 09:50:22 Aug 3, 2006

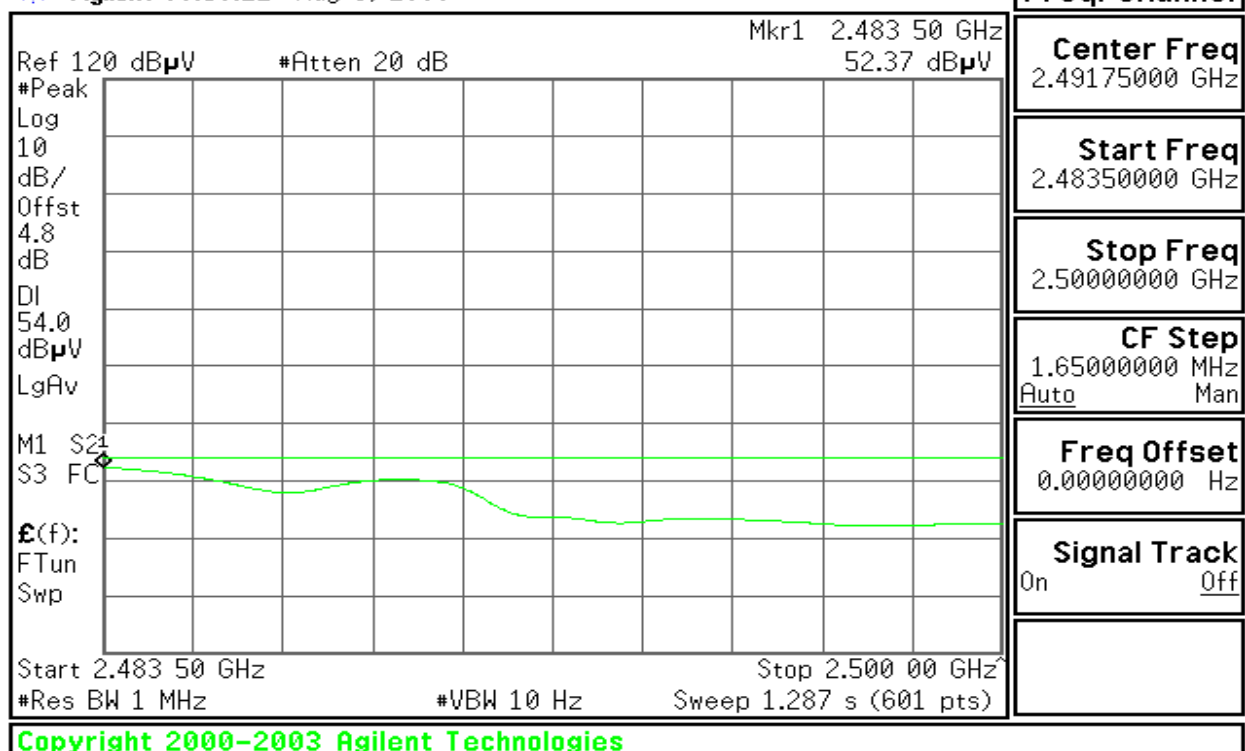

**Below 1GHz****Operation Mode:** Normal Link**Test Date:** July 17, 2006**Temperature:** 23°C**Tested by:** Jeff**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
37.5752	V	23.14	-6.92	16.22	30.00	-13.78	QP
65.1703	V	35.34	-14.27	21.07	30.00	-8.93	QP
124.6894	V	32.89	-7.77	25.12	30.00	-4.88	Peak
250.2204	V	44.54	-9.26	35.28	37.00	-1.72	QP
479.5591	V	34.08	-2.41	31.67	37.00	-5.33	Peak
875.1503	V	28.79	4.61	33.40	37.00	-3.60	Peak
250.2204	H	43.43	-9.26	34.17	37.00	-2.83	QP
479.5591	H	37.35	-2.41	34.94	37.00	-2.06	Peak
624.9991	H	35.90	0.03	35.93	37.00	-1.07	QP
750.1764	H	31.35	2.35	33.70	37.00	-3.30	Peak
800.8016	H	29.15	2.96	32.11	37.00	-4.89	Peak
875.1503	H	27.24	4.61	31.85	37.00	-5.15	Peak

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. $\text{Margin (dB)} = \text{Result (dBuV/m)} - \text{Limit (dBuV/m)}$.

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b(Chain 0 + Chain 1) / CH Low **Test Date:** July 17, 2006**Temperature:** 25°C**Tested by:** Jeff**Humidity:** 57 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1013.33	V	45.56	---	-1.34	44.22	---	74.00	54.00	-9.78	Peak
4608.33	V	38.07	---	10.19	48.26	---	74.00	54.00	-5.74	Peak
7266.67	V	37.49	27.13	15.53	53.02	42.66	74.00	54.00	-11.34	Average
N/A										
1013.33	H	44.50	---	-1.34	43.16	---	74.00	54.00	-10.84	Peak
4678.93	H	37.67	---	10.12	47.79	---	74.00	54.00	-6.21	Peak
7286.33	H	37.54	28.56	16.22	53.76	44.78	74.00	54.00	-9.22	Average
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b(Chain 0 + Chain 1) / CH Mid **Test Date:** July 17, 2006**Temperature:** 25°C**Tested by:** Jeff**Humidity:** 57 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1200.34	V	42.27	---	-0.53	41.74	---	74.00	54.00	-12.26	Peak
4875.00	V	37.87	---	10.51	48.38	---	74.00	54.00	-5.62	Peak
7416.67	V	36.72	31.02	16.22	52.94	47.24	74.00	54.00	-6.76	Average
N/A										
1153.33	H	40.32	---	-0.73	39.59	---	74.00	54.00	-14.41	Peak
4898.67	H	38.07	---	10.19	48.26	---	74.00	54.00	-5.74	Peak
7516.33	H	37.58	29.23	15.88	53.46	45.11	74.00	54.00	-8.89	Average
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b(Chain 0 + Chain 1) / CH High **Test Date:** July 17, 2006**Temperature:** 25°C**Tested by:** Jeff**Humidity:** 57 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1250.00	V	43.28	---	-0.43	42.85	---	74.00	54.00	-11.15	Peak
4936.33	V	37.07	---	11.25	48.32	---	74.00	54.00	-5.68	Peak
7406.33	V	37.79	29.79	15.68	53.47	45.47	74.00	54.00	-8.53	Average
N/A										
1236.67	H	43.14	---	-0.45	42.69	---	74.00	54.00	-11.31	Peak
4938.67	H	38.01	---	10.78	48.79	---	74.00	54.00	-5.21	Peak
7467.67	H	38.33	26.78	14.75	53.08	41.53	74.00	54.00	-12.47	Average
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g 20M(Chain 0 + Chain 1) / CH
Low

Test Date: July 17, 2006

Temperature: 25°C

Tested by: Jeff

Humidity: 57 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1300.33	V	42.46	---	-0.32	42.14	---	74.00	54.00	-11.86	Peak
4835.56	V	37.60	---	10.19	47.79	---	74.00	54.00	-6.21	Peak
7258.67	V	37.55	29.36	13.53	51.08	42.89	74.00	54.00	-11.11	Average
N/A										
1373.33	H	43.08	---	-0.17	42.91	---	74.00	54.00	-11.09	Peak
4836.99	H	36.67	---	11.01	47.68	---	74.00	54.00	-6.32	Peak
7261.33	H	38.01	31.02	13.31	51.32	44.33	74.00	54.00	-9.67	Average
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g 20M(Chain 0 + Chain 1) / CH Mid

Test Date: July 17, 2006

Temperature: 25°C

Tested by: Jeff

Humidity: 57 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1423.33	V	39.36	---	-0.02	39.34	---	74.00	54.00	-14.66	Peak
4887.65	V	38.45	---	8.69	47.14	---	74.00	54.00	-6.86	Peak
7326.69	V	36.75	28.12	15.33	52.08	43.45	74.00	54.00	-10.55	Average
N/A										
1626.67	H	40.72	---	0.76	41.48	---	74.00	54.00	-12.52	Peak
4896.33	H	38.56	---	9.12	47.68	---	74.00	54.00	-6.32	Peak
7335.67	H	37.25	29.03	15.46	52.71	44.49	74.00	54.00	-9.51	Average
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g 20M(Chain 0 + Chain 1) / CH High

Test Date: July 17, 2006

Temperature: 25°C

Tested by: Jeff

Humidity: 57 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1463.33	V	41.45	---	0.16	41.61	---	74.00	54.00	-12.39	Peak
4926.67	V	37.87	---	10.12	47.99	---	74.00	54.00	-6.01	Peak
7389.33	V	36.85	29.01	16.32	53.17	45.33	74.00	54.00	-8.67	Average
N/A										
1873.33	H	42.40	---	1.31	43.71	---	74.00	54.00	-10.29	Peak
4932.00	H	37.91	---	10.03	47.94	---	74.00	54.00	-6.06	Peak
7395.67	H	37.05	30.45	15.67	52.72	46.12	74.00	54.00	-7.88	Average
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g 40M(Chain 0 + Chain 1) / CH
Low

Test Date: July 17, 2006

Temperature: 25°C

Tested by: Jeff

Humidity: 57 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1153.33	V	40.32	---	-0.73	39.59	---	74.00	54.00	-14.41	Peak
2770.00	V	38.18	---	4.95	43.13	---	74.00	54.00	-10.87	Peak
4844.67	V	41.43	---	10.12	51.55	---	74.00	54.00	-2.45	Peak
N/A										
1236.67	H	43.14	---	-0.45	42.69	---	74.00	54.00	-11.31	Peak
2776.33	H	39.61	---	5.03	44.64	---	74.00	54.00	-9.36	Peak
4839.33	H	37.26	---	10.16	47.42	---	74.00	54.00	-6.58	Peak
N/A										

Remark:

7. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
8. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
9. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
10. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
11. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
12. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g 40M(Chain 0 + Chain 1) / CH Mid

Test Date: July 17, 2006

Temperature: 25°C

Tested by: Jeff

Humidity: 57 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1373.33	V	43.08	---	-0.17	42.91	---	74.00	54.00	-11.09	Peak
2373.33	V	38.46	---	4.29	42.75	---	74.00	54.00	-11.25	Peak
4833.67	V	38.92	---	10.12	49.04	---	74.00	54.00	-4.96	Peak
N/A										
1463.33	H	40.88	---	0.16	41.04	---	74.00	54.00	-12.96	Peak
4874.67	H	38.66	---	11.26	49.92	---	74.00	54.00	-4.08	Peak
7253.33	H	39.05	27.88	16.73	55.78	44.61	74.00	54.00	-9.39	Average
N/A										

Remark:

7. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
8. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
9. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
10. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
11. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
12. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g 40M(Chain 0 + Chain 1) / CH High

Test Date: July 17, 2006

Temperature: 25°C

Tested by: Jeff

Humidity: 57 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1623.33	V	41.05	---	0.76	41.81	---	74.00	54.00	-12.19	Peak
2373.33	V	38.36	---	4.29	42.65	---	74.00	54.00	-11.35	Peak
4900.00	V	38.23	---	12.85	50.73	---	74.00	54.00	-3.27	Peak
N/A										
1873.33	H	42.20	---	1.31	43.71	---	74.00	54.00	-10.29	Peak
4900.00	H	37.65	---	12.85	50.50	---	74.00	54.00	-3.50	Peak
7352.67	H	37.84	31.67	14.86	52.70	46.53	74.00	54.00	-7.47	Average
N/A										

Remark:

7. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
8. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
9. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
10. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
11. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
12. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel
mode (Chain 0 + Chain 1) / CH Low

Test Date: July 17, 2006

Temperature: 25°C

Tested by: Jeff

Humidity: 57 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1560.00	V	39.03	---	0.59	39.62	---	74.00	54.00	-14.38	Peak
4874.33	V	37.89	---	10.19	48.08	---	74.00	54.00	-5.92	Peak
7237.67	V	36.75	29.89	16.32	53.07	46.21	74.00	54.00	-7.79	Average
N/A										
1903.33	H	39.49	---	1.55	41.04	---	74.00	54.00	-12.96	Peak
4876.67	H	38.08	---	11.02	48.10	---	74.00	54.00	-4.90	Peak
7608.33	H	37.79	29.12	15.98	53.77	45.10	74.00	54.00	-8.90	Average
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel
mode (Chain 0 + Chain 1) / CH Mid

Test Date: July 17, 2006

Temperature: 25°C

Tested by: Jeff

Humidity: 57 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1626.67	V	44.42	---	0.76	45.18	---	74.00	54.00	-8.82	Peak
4876.33	V	37.59	---	10.45	48.04	---	74.00	54.00	-5.96	Peak
7323.00	V	37.89	28.16	15.08	52.97	43.24	74.00	54.00	-10.76	Average
N/A										
2126.67	H	39.91	---	2.73	42.64	---	74.00	54.00	-11.36	Peak
4891.00	H	38.52	---	11.02	49.54	---	74.00	54.00	-4.46	Peak
7346.67	H	38.15	30.09	16.02	54.17	46.11	74.00	54.00	-7.89	Average
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode (Chain 0 + Chain 1) / CH High

Test Date: July 17, 2006

Temperature: 25°C

Tested by: Jeff

Humidity: 57 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1686.67	V	40.72	---	0.75	41.47	---	74.00	54.00	-12.53	Peak
4967.67	V	37.60	---	12.67	50.27	---	74.00	54.00	-3.73	Peak
7415.33	V	37.81	29.11	15.64	53.45	44.75	74.00	54.00	-9.25	Average
N/A										
2373.33	H	38.46	---	4.29	42.75	---	74.00	54.00	-11.25	Peak
4968.33	H	38.11	---	11.86	49.97	---	74.00	54.00	-4.03	Peak
7455.00	H	38.49	30.07	16.23	54.72	46.30	74.00	54.00	-7.70	Average
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
(Chain 0 + Chain 1) / CH Low

Test Date: July 17, 2006

Temperature: 25°C

Tested by: Jeff

Humidity: 57 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1766.67	V	40.78	---	0.74	41.52	---	74.00	54.00	-12.48	Peak
4844.67	V	39.24	---	10.12	49.36	---	74.00	54.00	-4.64	Peak
7266.67	V	38.69	29.64	15.84	54.53	45.48	74.00	54.00	-8.52	Average
N/A										
2776.33	H	39.22	---	5.03	44.25	---	74.00	54.00	-9.75	Peak
4839.33	H	38.56	---	10.16	48.72	---	74.00	54.00	-5.29	Peak
7262.33	H	37.83	28.49	16.59	54.42	45.08	74.00	54.00	-8.92	Average
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
(Chain 0 + Chain 1) / CH Mid

Test Date: July 17, 2006

Temperature: 25°C

Tested by: Jeff

Humidity: 57 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1623.33	V	41.81	---	0.76	41.05	---	74.00	54.00	-12.19	Peak
4833.67	V	39.42	---	10.12	49.54	---	74.00	54.00	-4.46	Peak
8733.33	V	36.49	27.92	16.49	52.98	44.41	74.00	54.00	-9.90	Average
N/A										
1873.33	H	43.71	---	1.31	45.02	---	74.00	54.00	-8.98	Peak
2770.00	H	43.13	---	4.95	48.08	---	74.00	54.00	-5.92	Peak
7253.33	H	39.51	27.95	16.73	56.24	44.68	74.00	54.00	-9.32	Average
N/A										

Remark:

7. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
8. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
9. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
10. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
11. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
12. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
(Chain 0 + Chain 1) / CH High

Test Date: July 17, 2006

Temperature: 25°C

Tested by: Jeff

Humidity: 57 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2373.33	V	39.82	---	4.29	44.11	---	74.00	54.00	-9.89	Peak
4904.67	V	37.72	---	13.67	51.39	---	74.00	54.00	-2.61	Peak
7356.67	V	38.32	29.09	15.11	53.43	44.20	74.00	54.00	-9.80	Average
N/A										
1373.33	H	42.91	---	-0.17	42.74	---	74.00	54.00	-11.26	Peak
4900.00	H	37.95	---	12.85	50.80	---	74.00	54.00	-3.20	Peak
7354.33	H	38.16	30.77	15.04	53.20	45.81	74.00	54.00	-8.19	Average
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

**TEST RESULTS**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** July 4, 2006
Temperature: 25°C **Tested by:** Jeff
Humidity: 55% RH

Freq. (MHz)	PEAK. Raw (dBuV)	Q.P. Raw (dBuV)	AVG Raw (dBuV)	Q.P. Limit (dBuV)	AVG Limit (dBuV)	Margin (dB)	Factor (dB)	Remark
0.210	44.61	34.09	34.04	64.29	54.29	-20.25	10.36	Line
0.280	36.33	29.58	29.21	62.29	52.29	-23.08	10.39	Line
0.905	31.81	26.94	26.36	56.00	46.00	-19.64	10.42	Line
1.880	34.38	22.88	23.99	56.00	46.00	-22.01	10.50	Line
5.015	37.26	29.30	29.85	60.00	50.00	-20.15	10.73	Line
12.750	41.68	32.69	32.82	60.00	50.00	-17.18	11.51	Line
0.210	44.21	34.99	36.18	64.29	54.29	-18.11	10.39	Neutral
0.280	36.47	33.47	35.28	62.29	52.29	-17.01	10.40	Neutral
0.350	36.53	31.34	32.19	60.29	50.29	-18.10	10.40	Neutral
2.020	34.91	26.91	29.14	56.00	46.00	-16.86	10.50	Neutral
5.015	36.86	29.26	29.25	60.00	50.00	-20.75	10.77	Neutral
12.750	40.35	32.01	31.95	60.00	50.00	-18.05	11.68	Neutral


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Plots

Conducted emissions (Line 1)

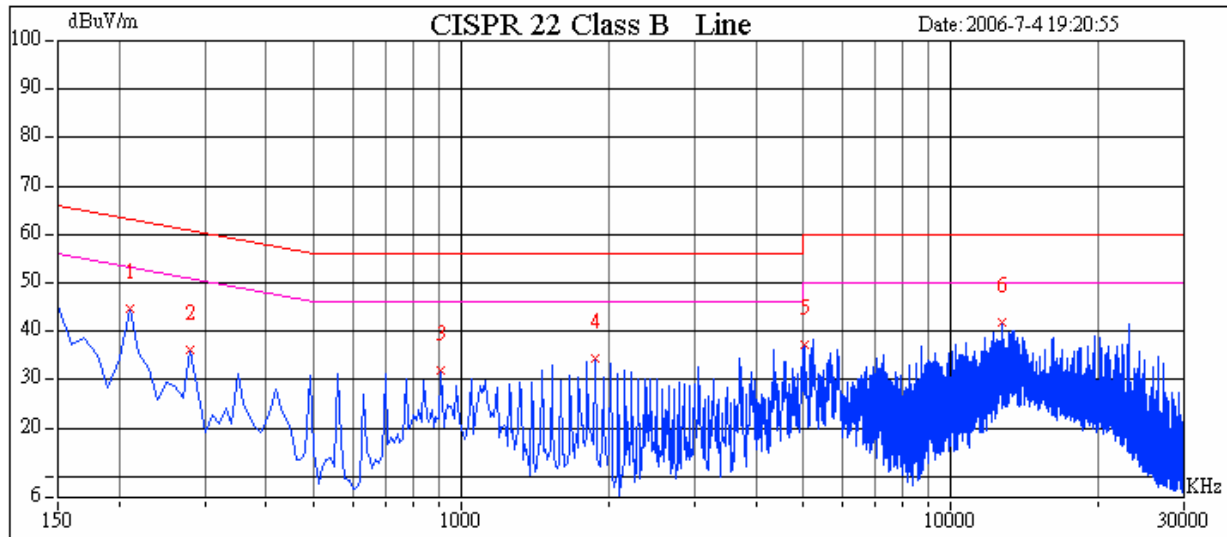

Conducted emissions (Line 2)

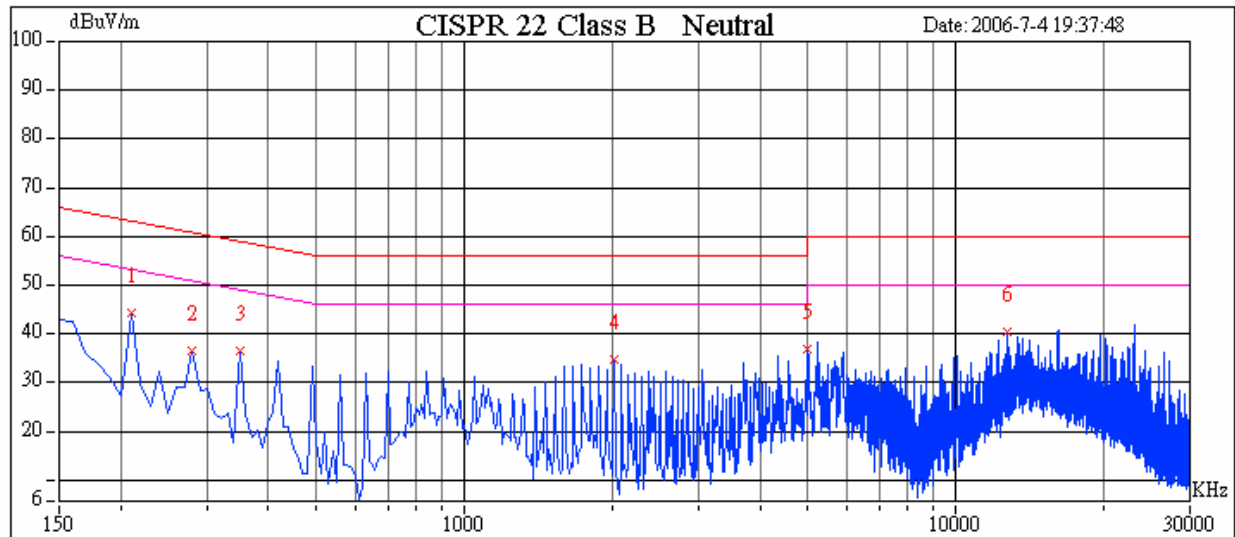



APPENDIX 1

RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

EUT Specification

EUT	Wireless-N Broadband Router
Frequency band (Operating)	☒ WLAN: 2.412GHz ~ 2.462GHz ☐ WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz ☐ WLAN: 5.745GHz ~ 5.825GHz ☐ Others
Device category	☐ Portable (<20cm separation) ☒ Mobile (>20cm separation) ☐ Others
Exposure classification	☐ Occupational/Controlled exposure ($S = 5\text{mW/cm}^2$) ☒ General Population/Uncontrolled exposure ($S=1\text{mW/cm}^2$)
Antenna diversity	☐ Single antenna ☒ Multiple antennas ☐ Tx diversity ☐ Rx diversity ☒ Tx/Rx diversity
Max. output power	IEEE 802.11b mode: 20.29 dBm (106.91mW) IEEE 802.11g 20M mode: 15.95 dBm (39.36mW) IEEE 802.11g 40M mode: 15.73 dBm (37.41mW) draft 802.11n Standard-20 MHz Channel mode: 16.29 dBm (42.56mW) draft 802.11n Wide-40 MHz Channel mode: 15.50 dBm (35.48mW)
Antenna gain (Max)	Dipole Antenna / Gain 3.6dBi (Numeric gain: 2.29)
Evaluation applied	☒ MPE Evaluation* ☐ SAR Evaluation ☐ N/A

Remark:

1. The maximum output power is 20.29dBm (106.91mW) at 2437MHz (with 2.29 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.

TEST RESULTS

No non-compliance noted.



Calculation

Given $E = \frac{\sqrt{30 \times P \times G}}{d}$ & $S = \frac{E^2}{3770}$

Where E = Field strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770 d^2}$$

Changing to units of mW and cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = d \text{ (m)} / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2} \quad \text{Equation 1}$$

Where d = Distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²

Maximum Permissible Exposure

Substituting the MPE safe distance using $d = 20$ cm into Equation 1:

Yields

$$S = 0.000199 \times P \times G$$

Where P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²



IEEE 802.11b:

EUT output power = 106.91mW

Numeric Antenna gain = 2.29

→ Power density = $0.0487 \text{ mW} / \text{cm}^2$

IEEE 802.11g 20M:

EUT output power = 39.36mW

Numeric Antenna gain = 2.29

→ Power density = $0.0179 \text{ mW} / \text{cm}^2$

IEEE 802.11g 40M:

EUT output power = 37.41mW

Numeric Antenna gain = 2.29

→ Power density = $0.0170 \text{ mW} / \text{cm}^2$

draft 802.11n Standard-20 MHz Channel mode

EUT output power = 42.56mW

Numeric Antenna gain = 2.29

→ Power density = $0.0194 \text{ mW} / \text{cm}^2$

draft 802.11n Wide-40 MHz Channel mode

EUT output power = 35.48mW

Numeric Antenna gain = 2.29

→ Power density = $0.0162 \text{ mW} / \text{cm}^2$

(For mobile or fixed location transmitters, the maximum power density is 1.0 mW/cm^2 even if the calculation indicates that the power density would be larger.)