




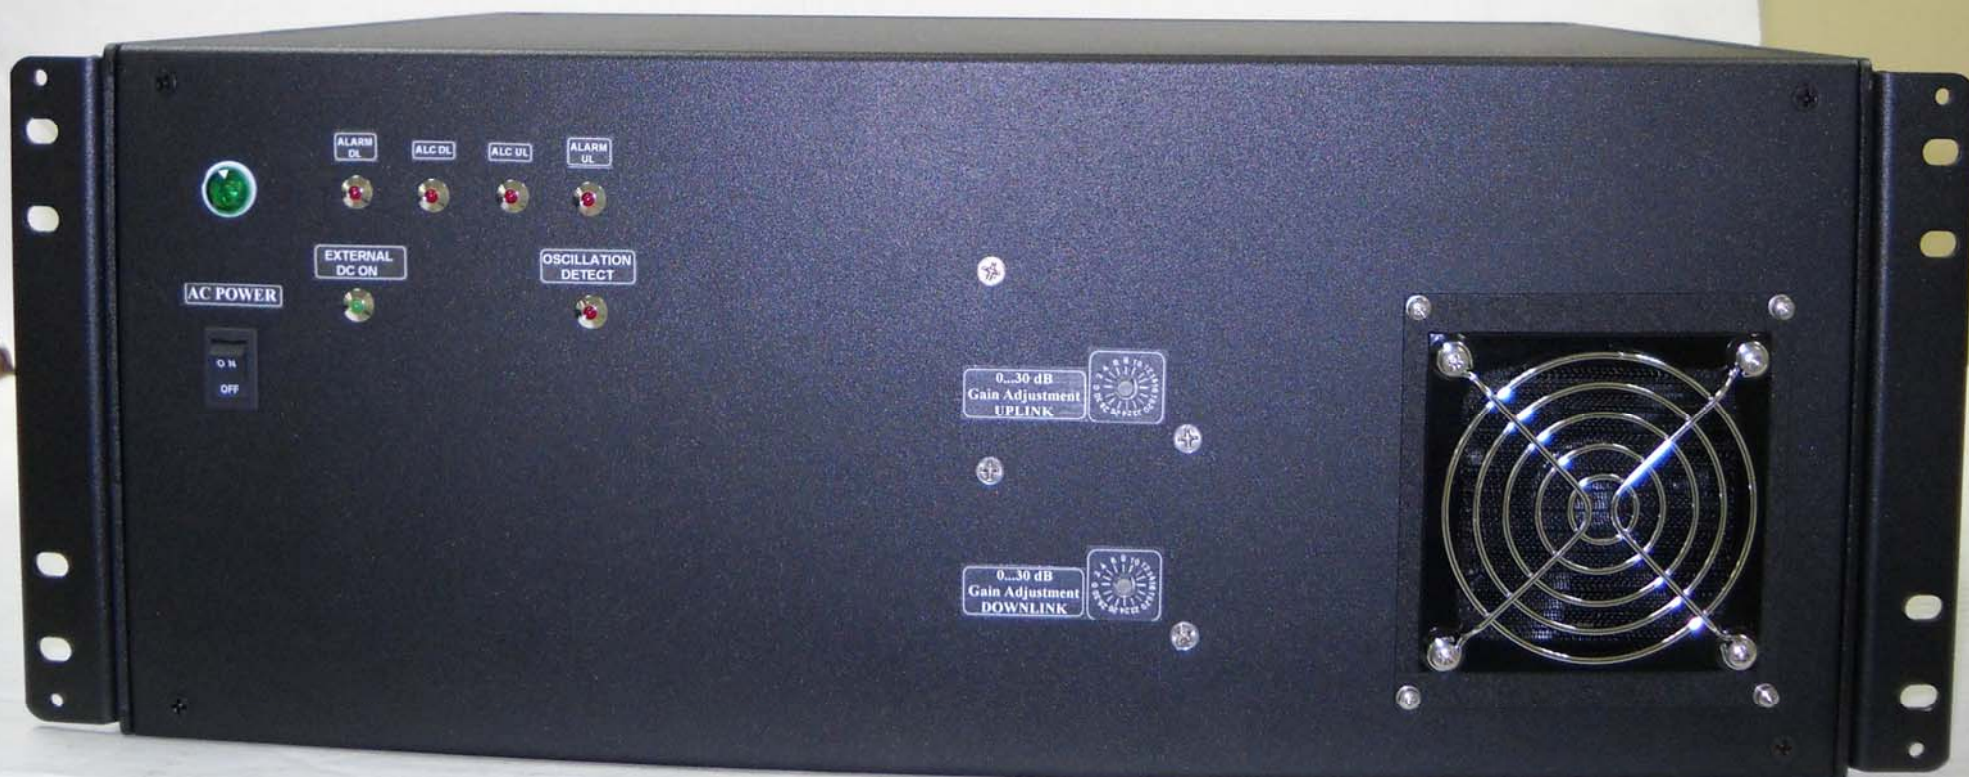

(-) BATTERY (+)

WARNING:
Input Signal Level
above +10 dBm may cause
damage to system

BASE

MOBILE

**PROUDLY MADE
IN THE U.S.A.**

WARNING:
DO NOT PLUG INTO AC UNTIL
RF PORTS ARE TERMINATED

WARNING:
THE WARRANTY IS VOID IF THE ISOLATION BETWEEN THE BASE
ANTENNA AND THE MOBILE ANTENNA IS NOT CONFIGURED AT
LEAST 134dB HIGHER THAN THE BDA GAIN. ISOLATION EQUAL OR
LESS THAN THE BDA GAIN WILL RESULT IN DAMAGE TO THE BDA.

This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received,
that may cause undesired operation.

This device is a Part 90
Signal Booster and a
90.219 Class B device.

DISCLAIMER: This is NOT a CE-MARKED device. It is designed for installation
by FCC LICENSED and QUALIFIED INSTALLERS. This Model does not FCC
LICENSE or express consent of an FCC License to operate this device. The
Model requires UHF & signal frequency for delivery to 47 CFR 90.219. The
www.fcc.gov website contains information. Unintentional use may result
in significant health and safety issues. No warranty is made of \$100,000
for health contributing evidence.

G-Wave, Inc.
MODEL: BDA-UHF-36/36-80-R
FCC ID: Q8XUHF3680R IC: 4951A UHF3680R
SER.No: 15031003 (455.5 MHz)

GND