


|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/30 - 07:04 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

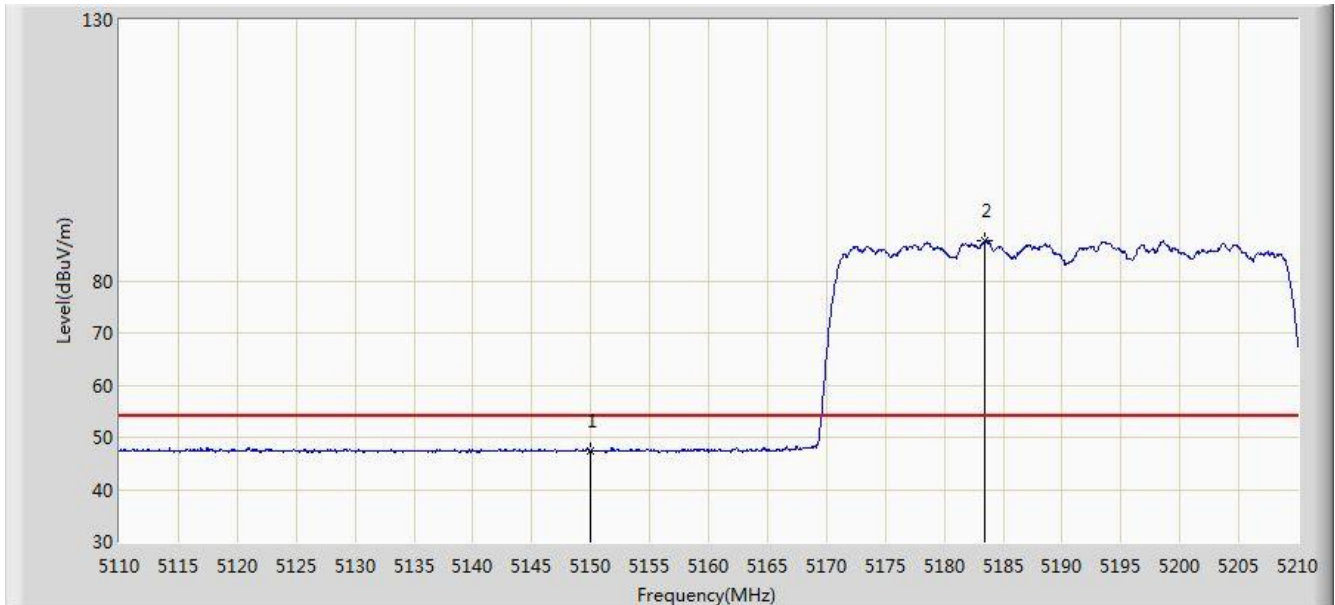


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 47.403                 | 43.234               | -6.597          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5183.450        | 87.732                 | 83.675               | N/A             | N/A            | 4.057       | AV   |

Note: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/30 - 07:02 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

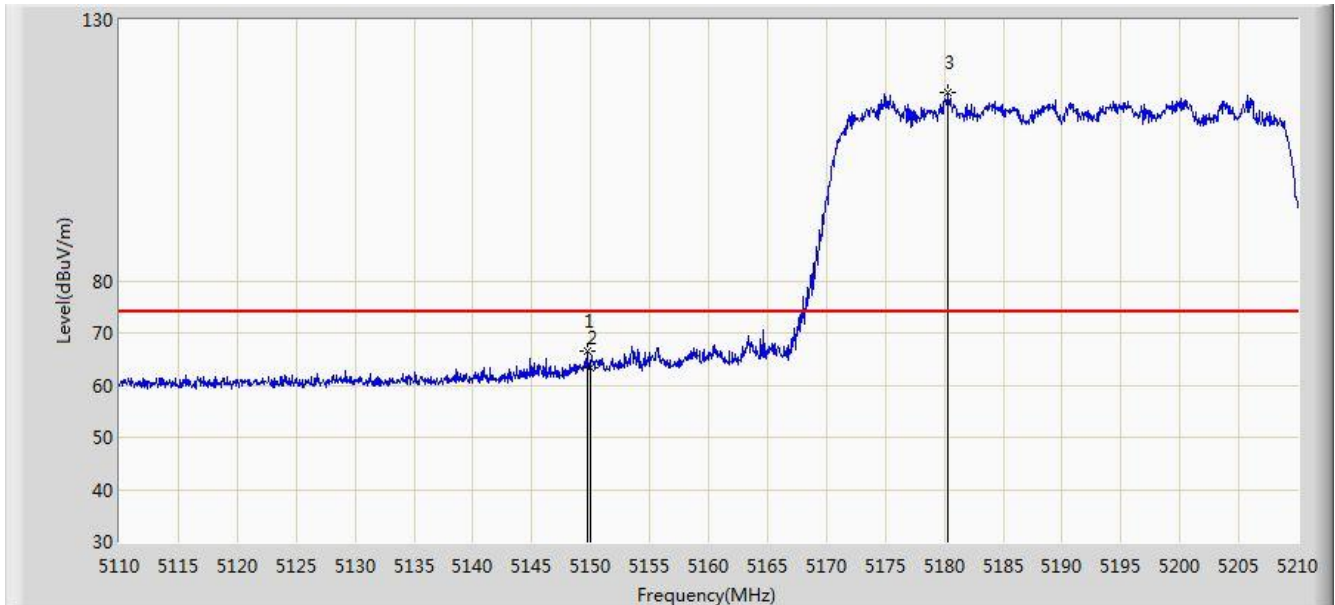


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.700        | 66.639                 | 62.469               | -7.361          | 74.000         | 4.170       | PK   |
| 2  |      |      | 5150.000        | 63.338                 | 59.169               | -10.662         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5180.350        | 116.032                | 111.964              | N/A             | N/A            | 4.068       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/30 - 06:59 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

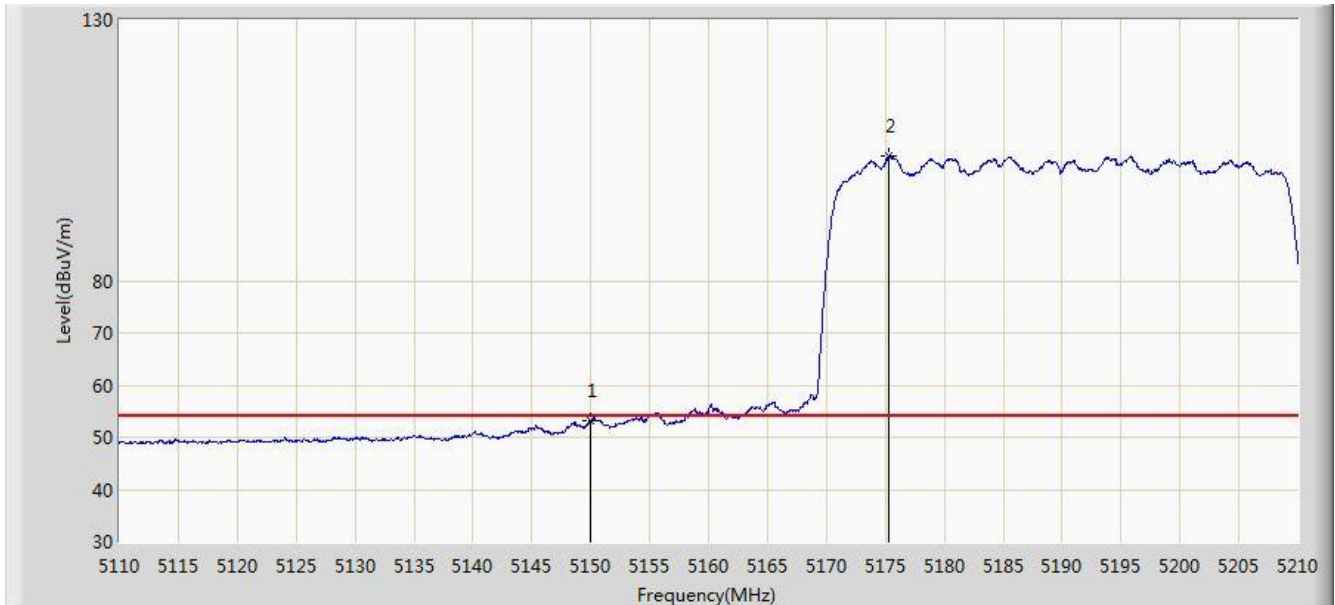


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 53.074                 | 48.905               | -0.926          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5175.350        | 103.839                | 99.754               | N/A             | N/A            | 4.085       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/30 - 07:47 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 |                          |

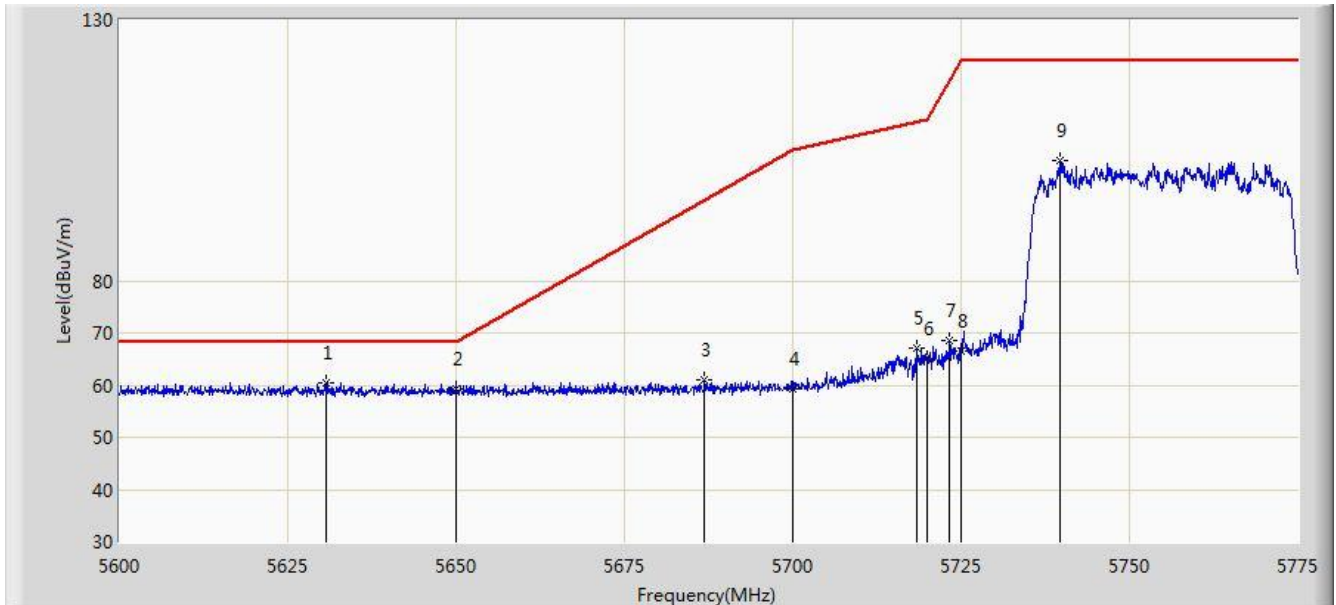


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5630.625        | 60.478                 | 55.867               | -7.722          | 68.200         | 4.611       | PK   |
| 2  |      |      | 5650.000        | 59.277                 | 54.606               | -8.923          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5686.888        | 61.158                 | 56.343               | -34.371         | 95.529         | 4.815       | PK   |
| 4  |      |      | 5700.000        | 59.355                 | 54.477               | -45.845         | 105.200        | 4.878       | PK   |
| 5  |      |      | 5718.475        | 67.188                 | 62.201               | -43.186         | 110.374        | 4.986       | PK   |
| 6  |      |      | 5720.000        | 64.992                 | 59.995               | -45.808         | 110.800        | 4.997       | PK   |
| 7  |      |      | 5723.288        | 68.411                 | 63.393               | -49.887         | 118.298        | 5.018       | PK   |
| 8  |      |      | 5725.000        | 66.504                 | 61.475               | -55.696         | 122.200        | 5.029       | PK   |
| 9  |      |      | 5739.737        | 102.925                | 97.802               | N/A             | N/A            | 5.123       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/30 - 07:46 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 |                          |

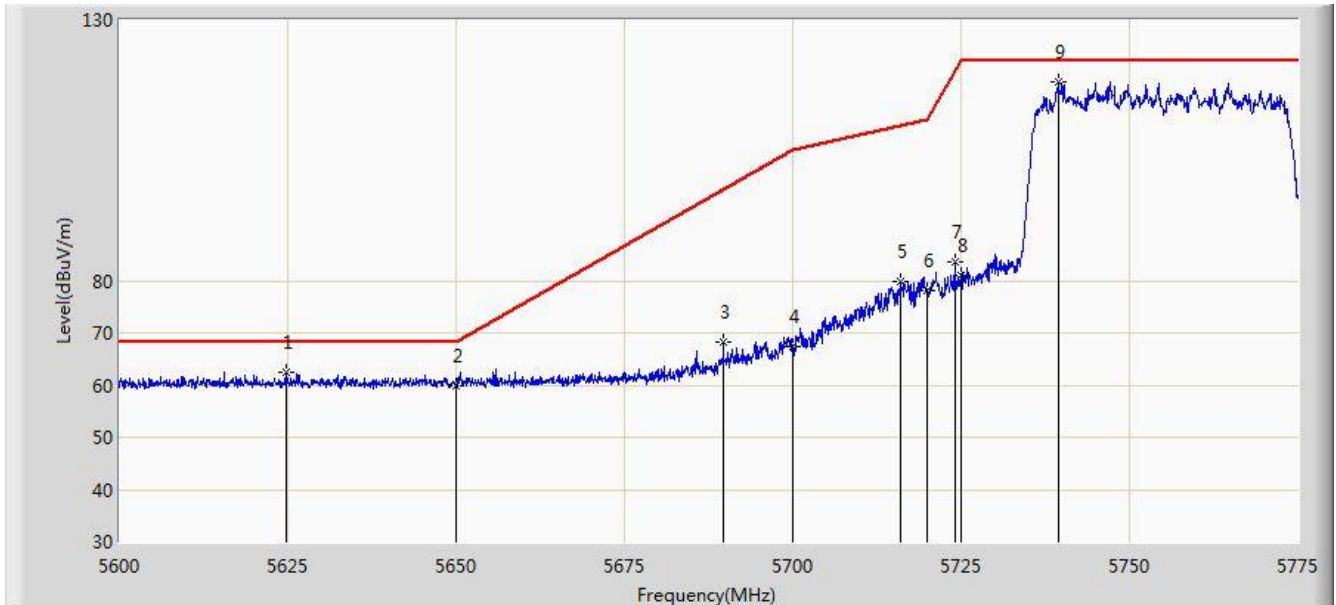


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5624.675        | 62.559                 | 57.965               | -5.641          | 68.200         | 4.595       | PK   |
| 2  |      |      | 5650.000        | 59.942                 | 55.271               | -8.258          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5689.687        | 68.384                 | 63.558               | -29.211         | 97.595         | 4.825       | PK   |
| 4  |      |      | 5700.000        | 67.379                 | 62.501               | -37.821         | 105.200        | 4.878       | PK   |
| 5  |      |      | 5715.937        | 79.735                 | 74.764               | -29.929         | 109.664        | 4.971       | PK   |
| 6  |      |      | 5720.000        | 77.991                 | 72.994               | -32.809         | 110.800        | 4.997       | PK   |
| 7  |      |      | 5724.075        | 83.676                 | 78.653               | -36.416         | 120.092        | 5.023       | PK   |
| 8  |      |      | 5725.000        | 80.872                 | 75.843               | -41.328         | 122.200        | 5.029       | PK   |
| 9  |      | *    | 5739.388        | 118.115                | 112.994              | N/A             | N/A            | 5.120       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/30 - 07:51 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 |                          |

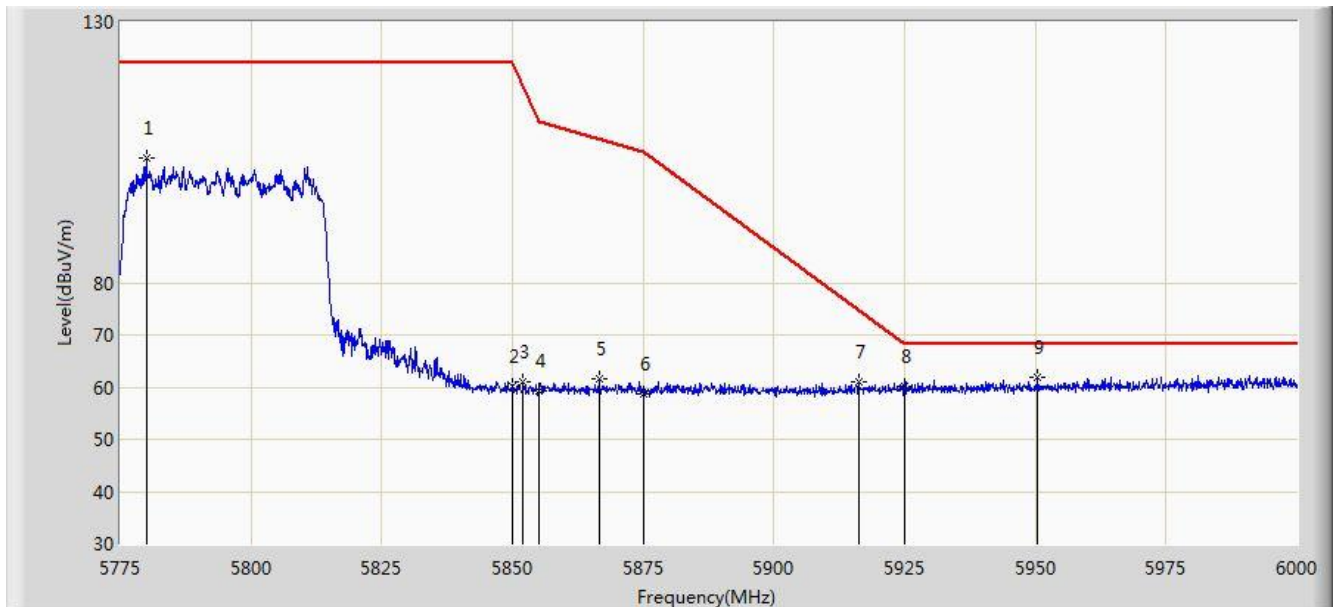


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5779.950        | 103.953                | 98.612               | N/A             | N/A            | 5.342       | PK   |
| 2  |      |      | 5850.000        | 60.098                 | 54.372               | -62.102         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5852.062        | 60.893                 | 55.159               | -56.604         | 117.497        | 5.734       | PK   |
| 4  |      |      | 5855.000        | 59.356                 | 53.610               | -51.444         | 110.800        | 5.746       | PK   |
| 5  |      |      | 5866.575        | 61.588                 | 55.797               | -45.969         | 107.557        | 5.792       | PK   |
| 6  |      |      | 5875.000        | 58.734                 | 52.914               | -46.466         | 105.200        | 5.820       | PK   |
| 7  |      |      | 5916.187        | 61.082                 | 55.137               | -13.617         | 74.699         | 5.945       | PK   |
| 8  |      |      | 5925.000        | 60.218                 | 54.252               | -7.982          | 68.200         | 5.967       | PK   |
| 9  |      | *    | 5950.388        | 61.799                 | 55.772               | -6.401          | 68.200         | 6.027       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/30 - 07:49 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 |                          |

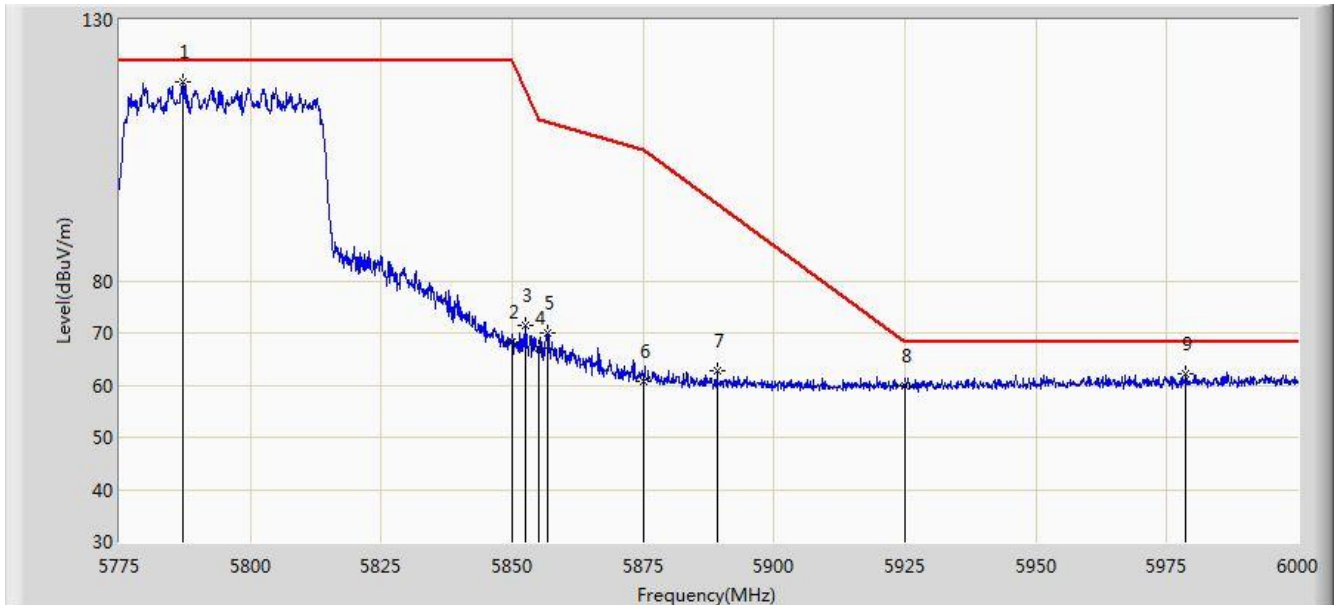


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5787.263        | 118.089                | 112.711              | N/A             | N/A            | 5.378       | PK   |
| 2  |      |      | 5850.000        | 68.261                 | 62.535               | -53.939         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5852.400        | 71.343                 | 65.608               | -45.383         | 116.727        | 5.736       | PK   |
| 4  |      |      | 5855.000        | 67.059                 | 61.313               | -43.741         | 110.800        | 5.746       | PK   |
| 5  |      |      | 5856.900        | 70.060                 | 64.306               | -40.207         | 110.267        | 5.754       | PK   |
| 6  |      |      | 5875.000        | 60.859                 | 55.039               | -44.341         | 105.200        | 5.820       | PK   |
| 7  |      |      | 5889.075        | 62.865                 | 56.997               | -31.888         | 94.753         | 5.869       | PK   |
| 8  |      |      | 5925.000        | 59.758                 | 53.792               | -8.442          | 68.200         | 5.967       | PK   |
| 9  |      |      | 5978.625        | 62.220                 | 56.145               | -5.980          | 68.200         | 6.075       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/30 - 08:00 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

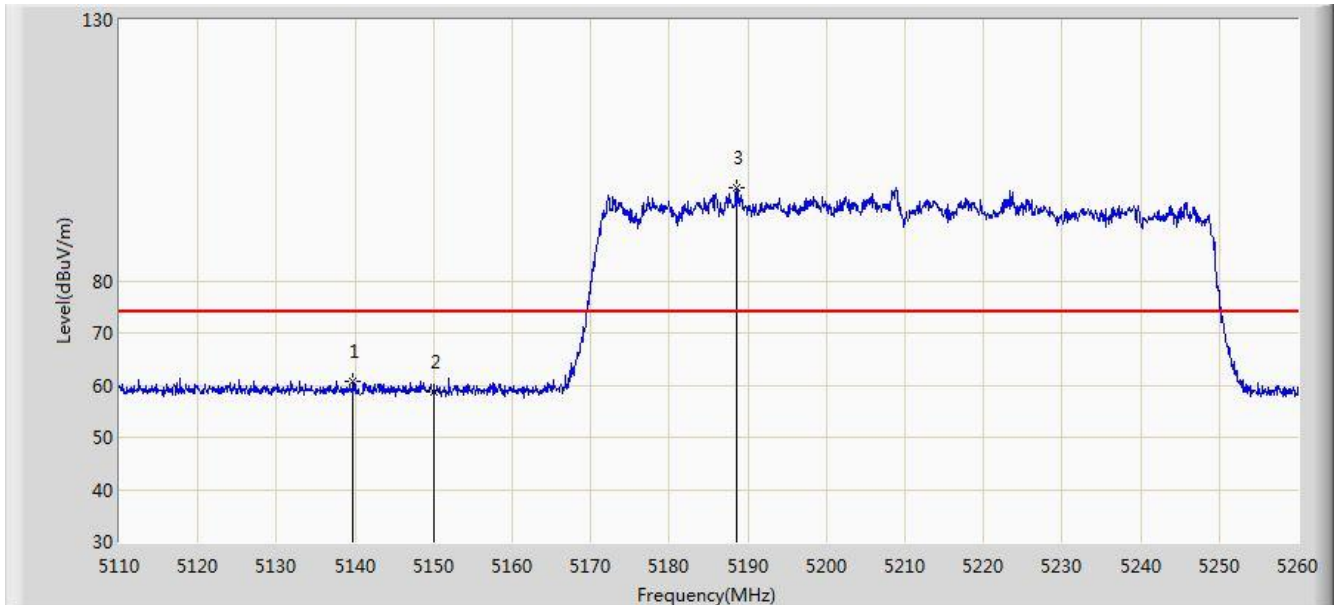


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5139.700        | 60.597                 | 56.422               | -13.403         | 74.000         | 4.175       | PK   |
| 2  |      |      | 5150.000        | 58.614                 | 54.445               | -15.386         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5188.600        | 97.939                 | 93.901               | N/A             | N/A            | 4.038       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/30 - 08:01 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

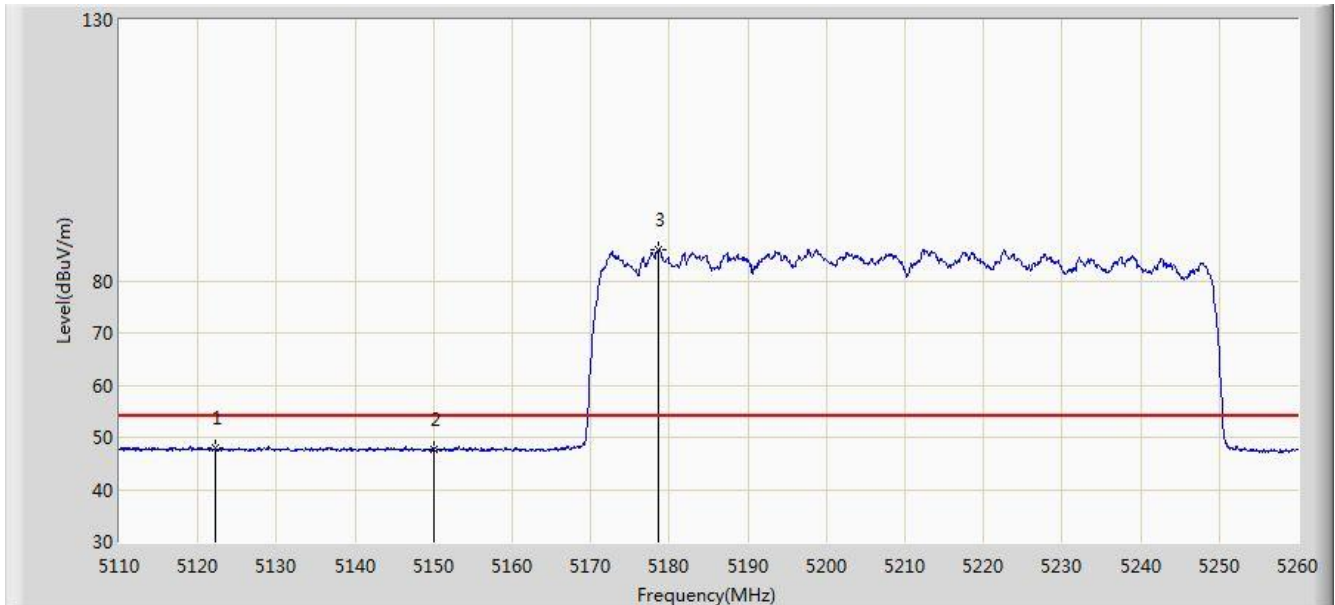


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5122.300        | 47.892                 | 43.717               | -6.108          | 54.000         | 4.175       | AV   |
| 2  |      |      | 5150.000        | 47.679                 | 43.510               | -6.321          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5178.700        | 86.078                 | 82.005               | N/A             | N/A            | 4.073       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/30 - 07:59 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

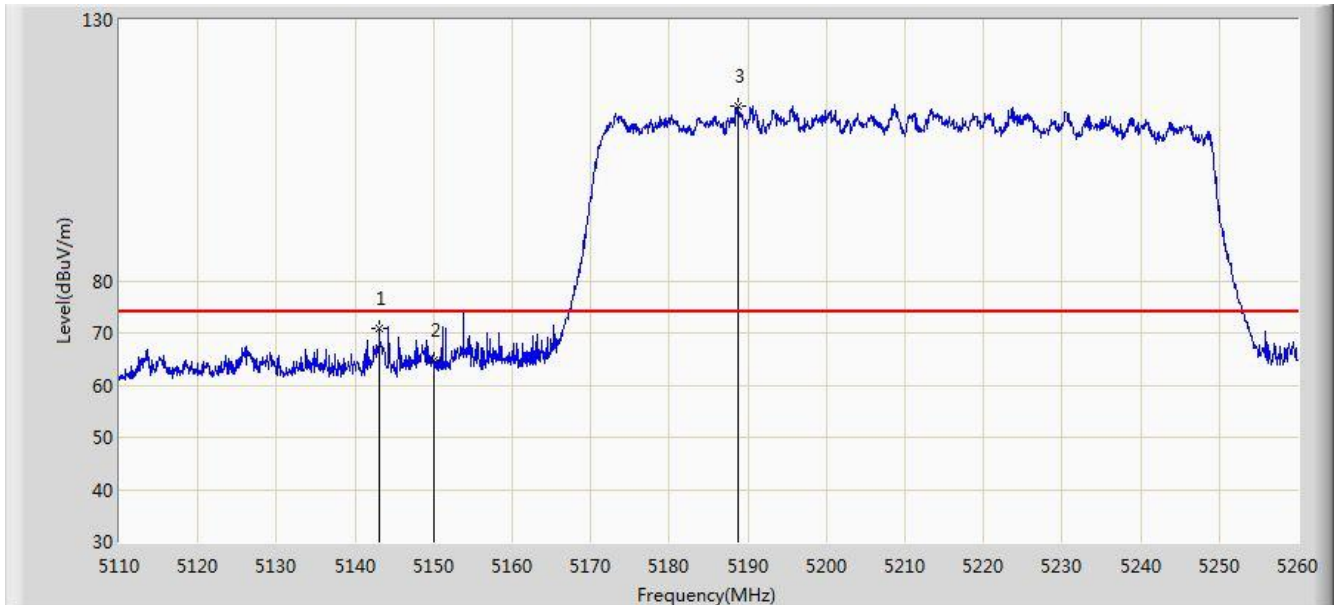


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5143.075        | 70.760                 | 66.584               | -3.240          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 64.773                 | 60.604               | -9.227          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5188.750        | 113.527                | 109.489              | N/A             | N/A            | 4.038       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/30 - 07:57 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

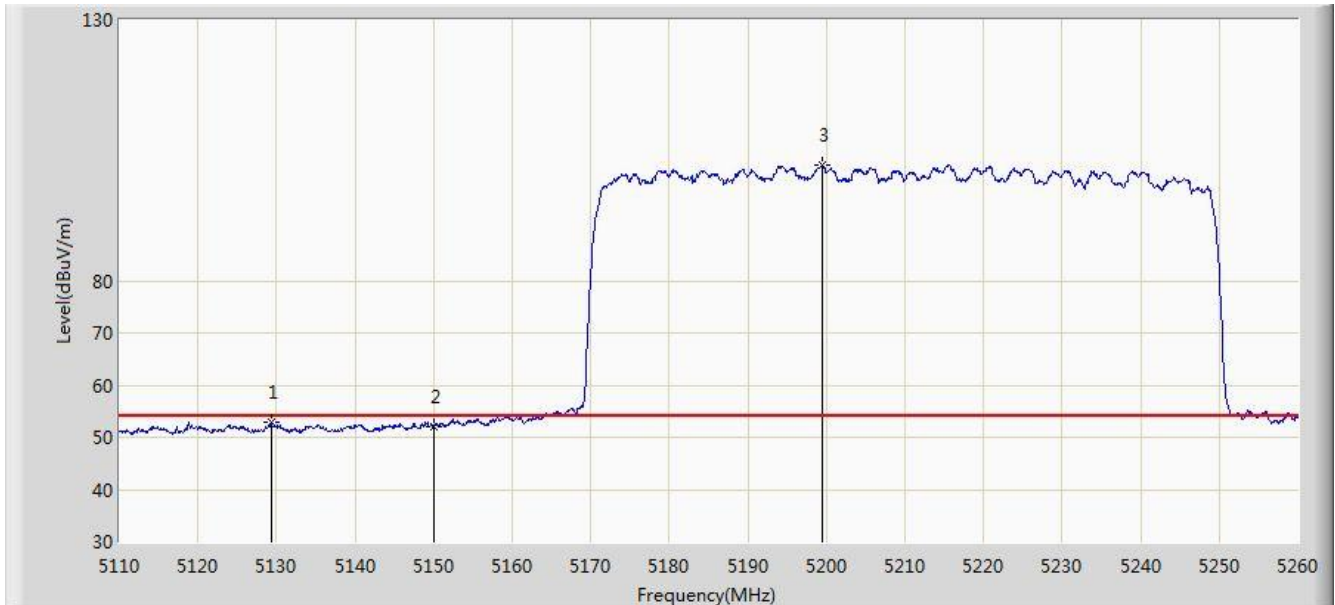


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5129.275        | 53.017                 | 48.842               | -0.983          | 54.000         | 4.174       | AV   |
| 2  |      |      | 5150.000        | 52.160                 | 47.991               | -1.840          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5199.400        | 102.230                | 98.230               | N/A             | N/A            | 4.001       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/30 - 08:34 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 |                          |

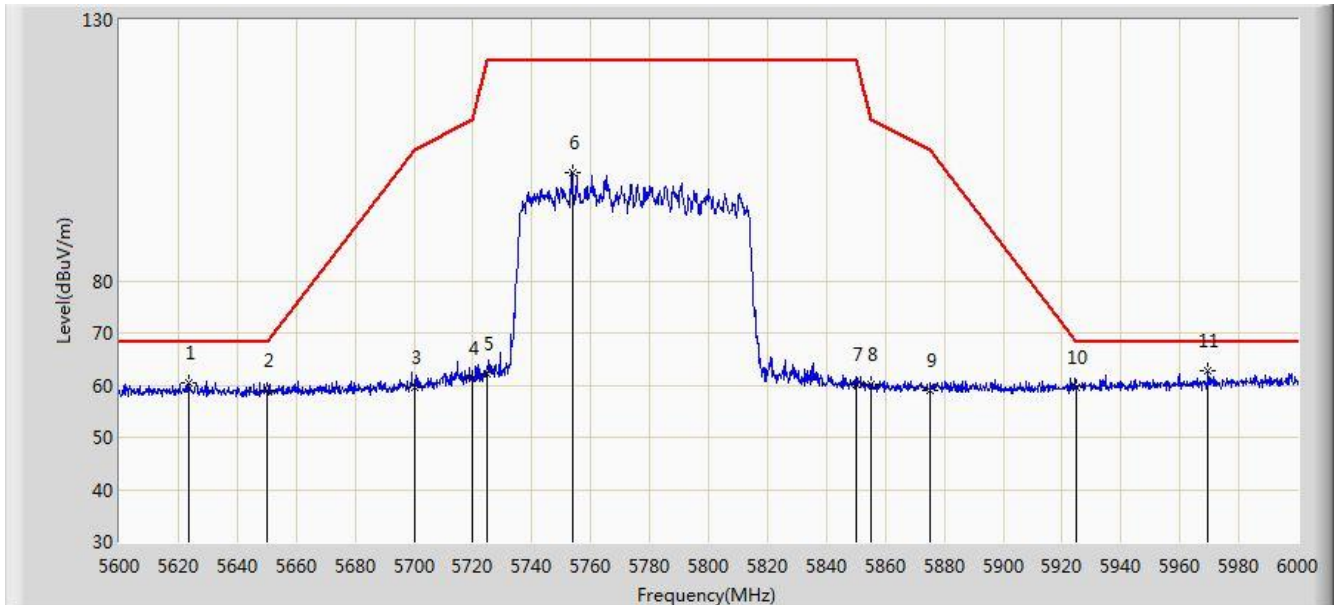


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5623.600        | 60.427                 | 55.836               | -7.773          | 68.200         | 4.591       | PK   |
| 2  |      |      | 5650.000        | 58.923                 | 54.252               | -9.277          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 59.519                 | 54.641               | -45.681         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 61.216                 | 56.219               | -49.584         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 62.253                 | 57.224               | -59.947         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5753.800        | 100.799                | 95.594               | N/A             | N/A            | 5.205       | PK   |
| 7  |      |      | 5850.000        | 60.117                 | 54.391               | -62.083         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 60.031                 | 54.285               | -50.769         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 59.107                 | 53.287               | -46.093         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 59.671                 | 53.705               | -8.529          | 68.200         | 5.967       | PK   |
| 11 |      | *    | 5969.600        | 62.841                 | 56.781               | -5.359          | 68.200         | 6.061       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/30 - 08:32 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 |                          |

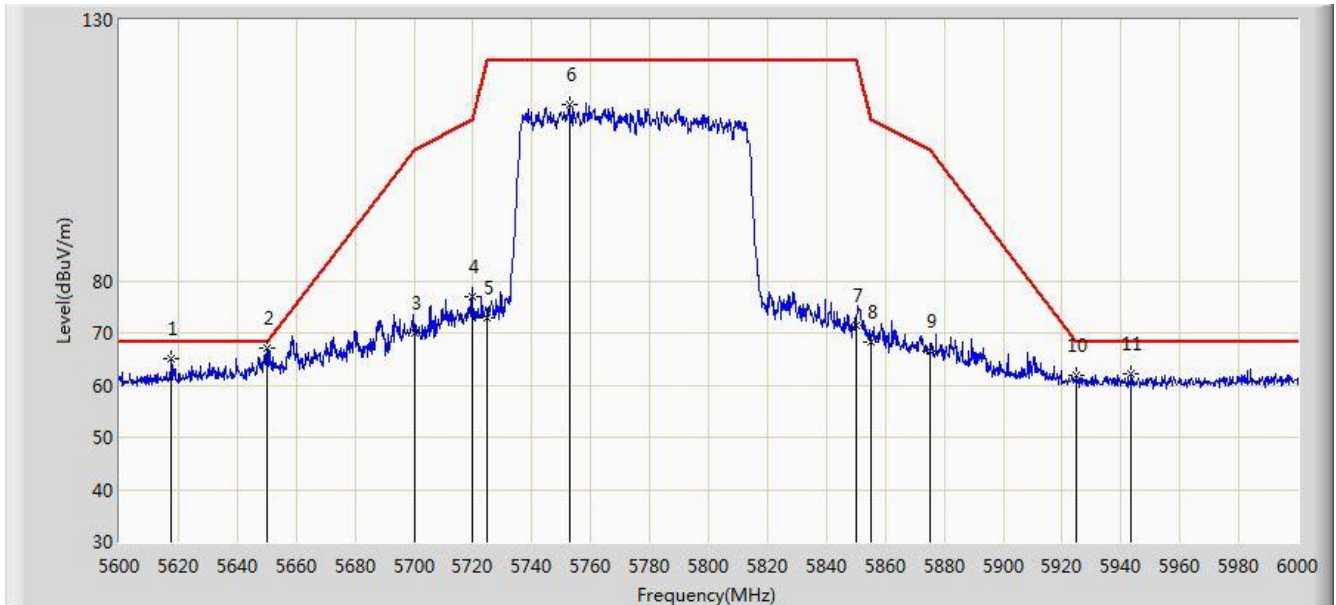


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5617.600        | 65.195                 | 60.621               | -3.005          | 68.200         | 4.574       | PK   |
| 2  |      | *    | 5650.000        | 67.147                 | 62.476               | -1.053          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 69.962                 | 65.084               | -35.238         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 77.013                 | 72.016               | -33.787         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 72.970                 | 67.941               | -49.230         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5752.800        | 113.734                | 108.535              | N/A             | N/A            | 5.199       | PK   |
| 7  |      |      | 5850.000        | 71.314                 | 65.588               | -50.886         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 68.309                 | 62.563               | -42.491         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 66.390                 | 60.570               | -38.810         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 61.911                 | 55.945               | -6.289          | 68.200         | 5.967       | PK   |
| 11 |      |      | 5943.600        | 62.244                 | 56.232               | -5.956          | 68.200         | 6.012       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**For APIN0514 Directional Antenna (AP-ANT-48):**

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/26 - 23:04 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

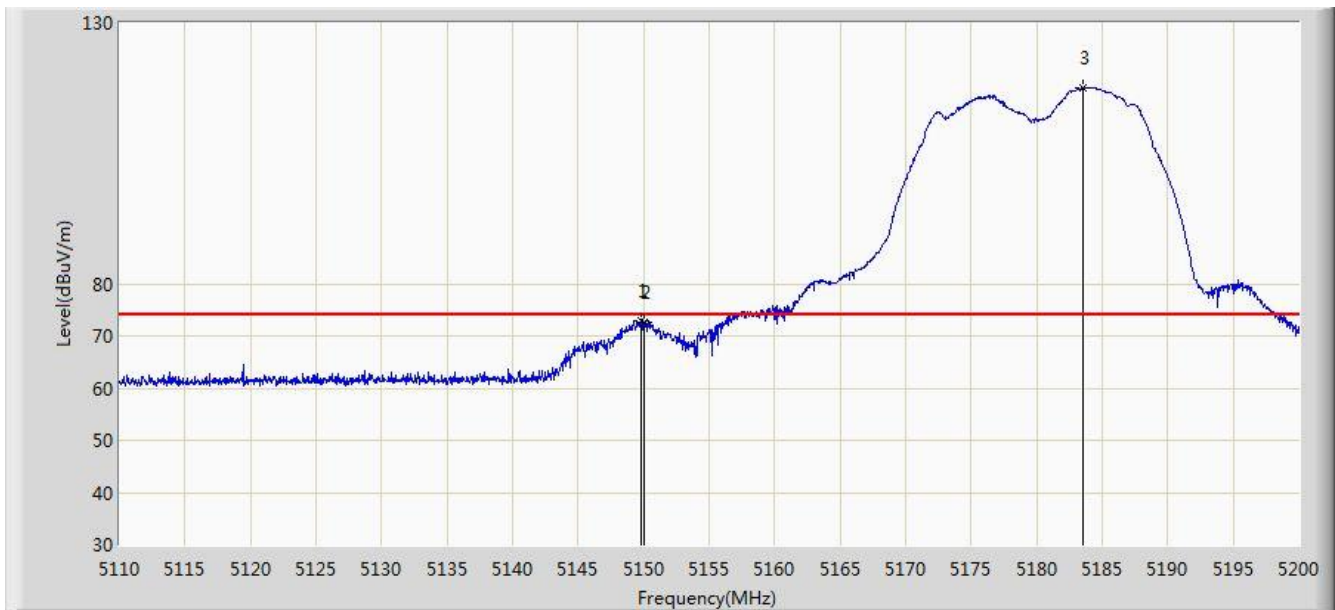


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.780        | 72.865                 | 68.695               | -1.135          | 74.000         | 4.169       | PK   |
| 2  |      |      | 5150.000        | 72.497                 | 68.328               | -1.503          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5183.575        | 117.467                | 113.411              | N/A             | N/A            | 4.057       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/26 - 23:05 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

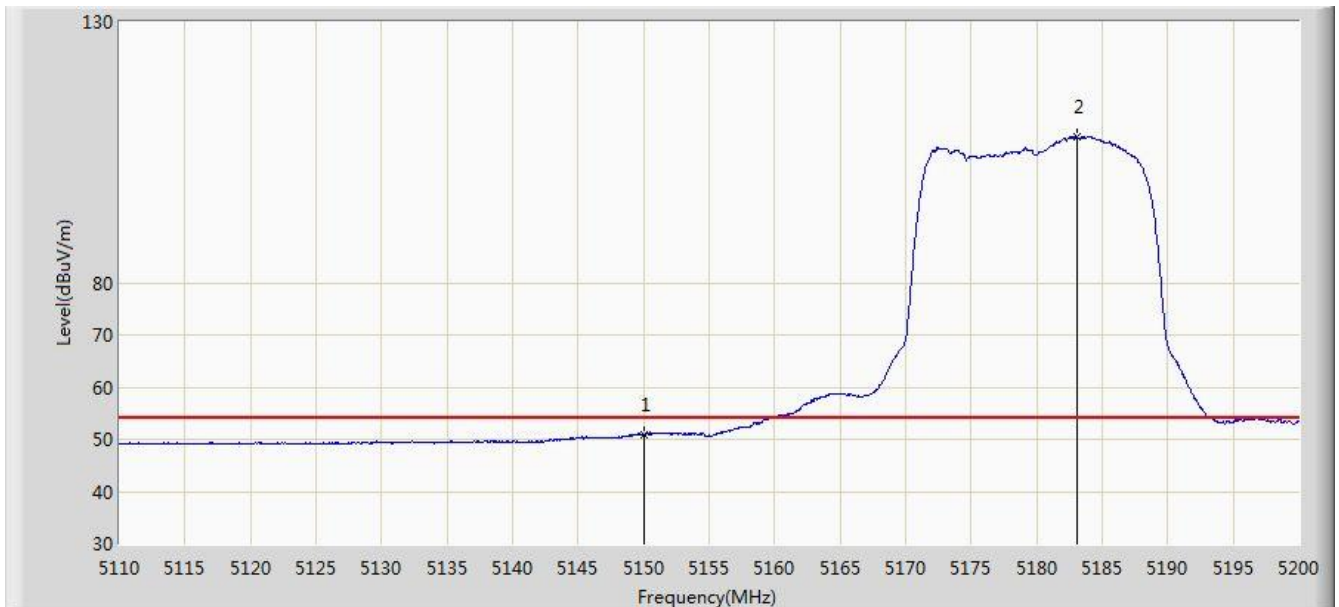


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.981                 | 46.812               | -3.019          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5183.035        | 107.861                | 103.803              | N/A             | N/A            | 4.057       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/26 - 22:54 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

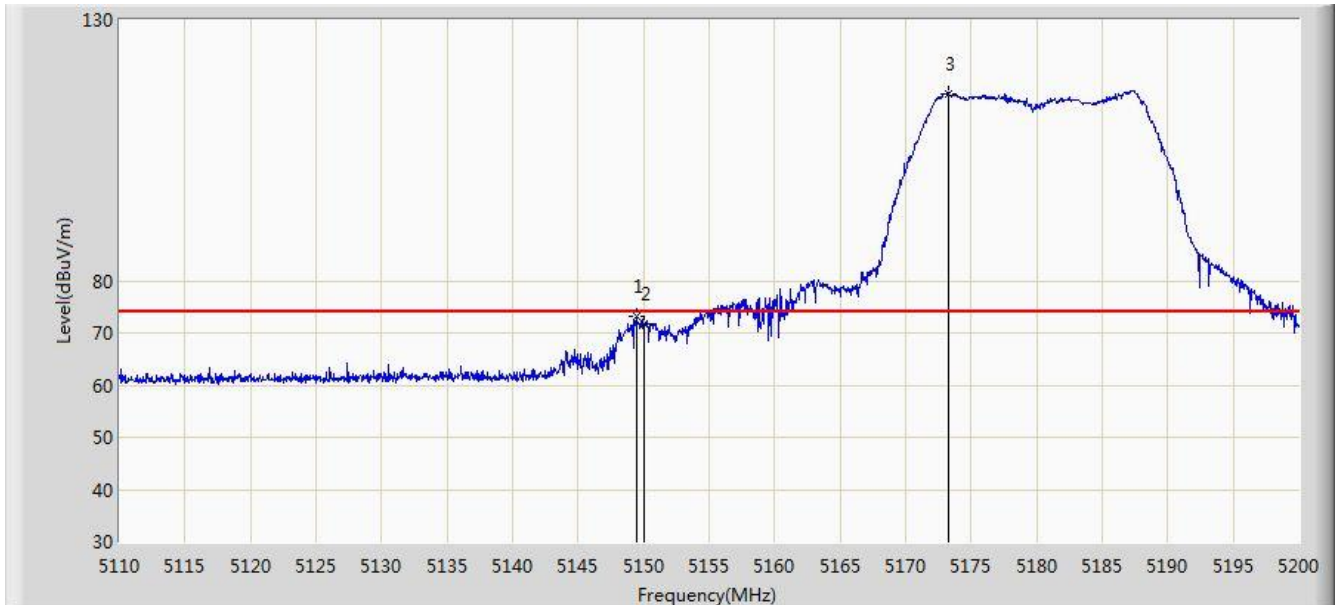


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.420        | 73.049                 | 68.878               | -0.951          | 74.000         | 4.171       | PK   |
| 2  |      |      | 5150.000        | 71.697                 | 67.528               | -2.303          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5173.225        | 115.715                | 111.622              | N/A             | N/A            | 4.093       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/26 - 23:03 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

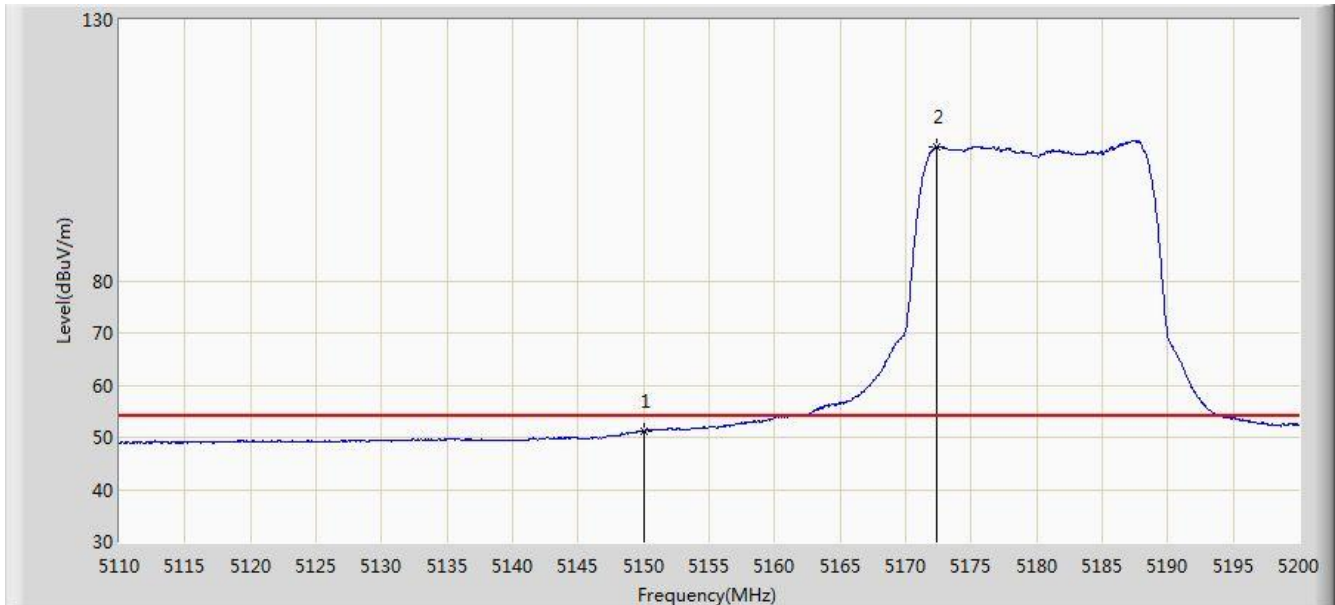


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 51.279                 | 47.110               | -2.721          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5172.415        | 105.638                | 101.542              | N/A             | N/A            | 4.096       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/26 - 23:31 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 + 1 + 2 + 3 |                          |

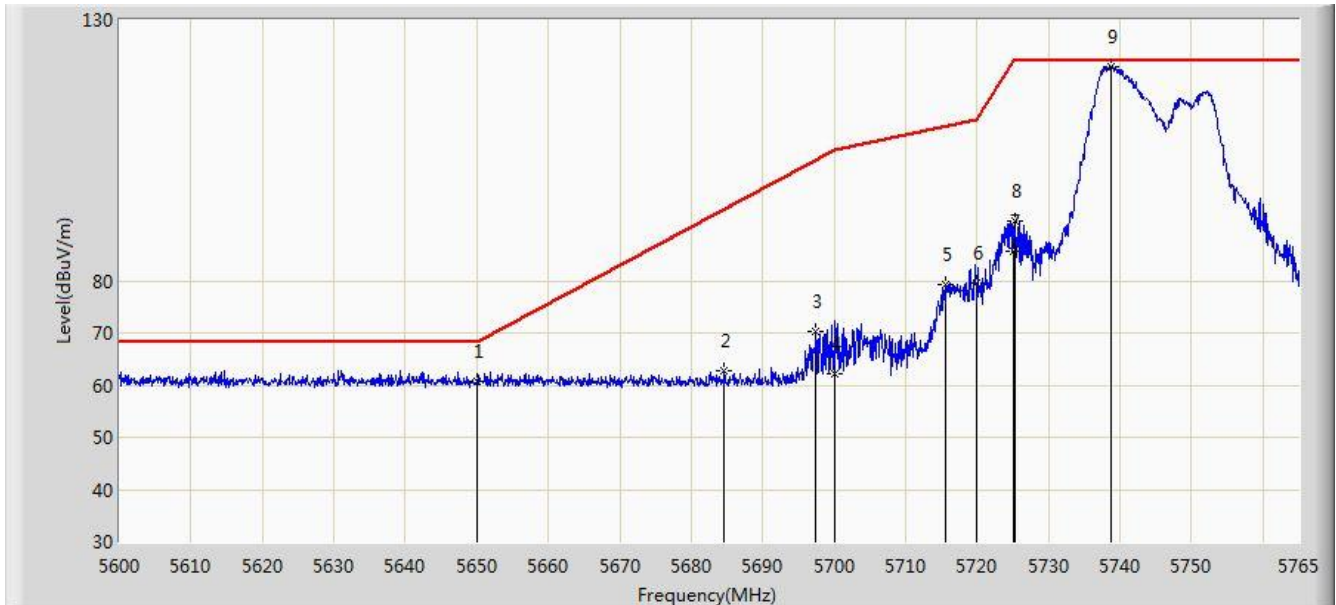


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5650.000        | 60.795                 | 56.124               | -7.405          | 68.200         | 4.671       | PK   |
| 2  |      |      | 5684.645        | 62.641                 | 57.835               | -31.231         | 93.872         | 4.805       | PK   |
| 3  |      |      | 5697.433        | 70.415                 | 65.550               | -32.894         | 103.308        | 4.865       | PK   |
| 4  |      |      | 5700.000        | 62.218                 | 57.340               | -42.982         | 105.200        | 4.878       | PK   |
| 5  |      |      | 5715.583        | 79.319                 | 74.351               | -30.245         | 109.565        | 4.968       | PK   |
| 6  |      |      | 5720.000        | 79.421                 | 74.424               | -31.379         | 110.800        | 4.997       | PK   |
| 7  |      |      | 5725.000        | 85.660                 | 80.631               | -36.540         | 122.200        | 5.029       | PK   |
| 8  |      |      | 5725.400        | 91.416                 | 86.384               | -30.784         | 122.200        | 5.032       | PK   |
| 9  |      | *    | 5738.765        | 121.042                | 115.925              | N/A             | N/A            | 5.116       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/26 - 23:28 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 + 1 + 2 + 3 |                          |

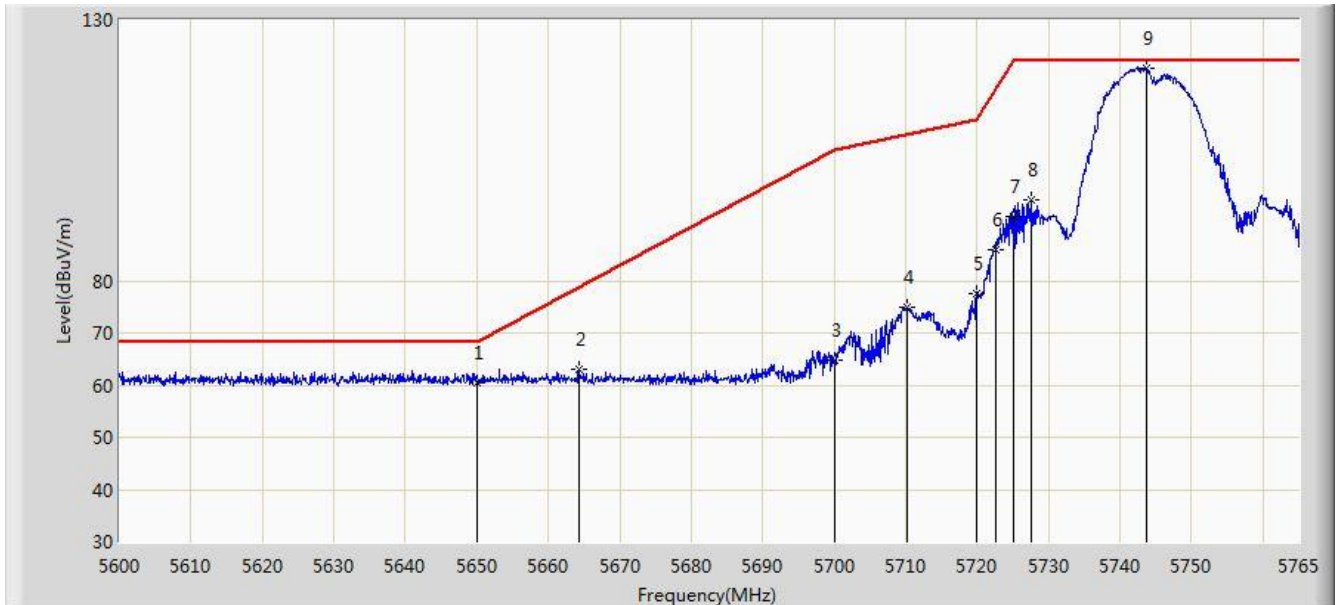


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5650.000        | 60.478                 | 55.807               | -7.722          | 68.200         | 4.671       | PK   |
| 2  |      |      | 5664.268        | 63.132                 | 58.408               | -15.660         | 78.792         | 4.724       | PK   |
| 3  |      |      | 5700.000        | 64.881                 | 60.003               | -40.319         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5710.220        | 75.071                 | 70.137               | -32.993         | 108.064        | 4.935       | PK   |
| 5  |      |      | 5720.000        | 77.652                 | 72.655               | -33.148         | 110.800        | 4.997       | PK   |
| 6  |      |      | 5722.595        | 86.035                 | 81.021               | -30.683         | 116.718        | 5.014       | PK   |
| 7  |      |      | 5725.000        | 92.407                 | 87.378               | -29.793         | 122.200        | 5.029       | PK   |
| 8  |      |      | 5727.627        | 95.549                 | 90.503               | -26.651         | 122.200        | 5.046       | PK   |
| 9  |      | *    | 5743.632        | 120.670                | 115.523              | N/A             | N/A            | 5.147       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/26 - 23:35 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0 + 1 + 2 + 3 |                          |

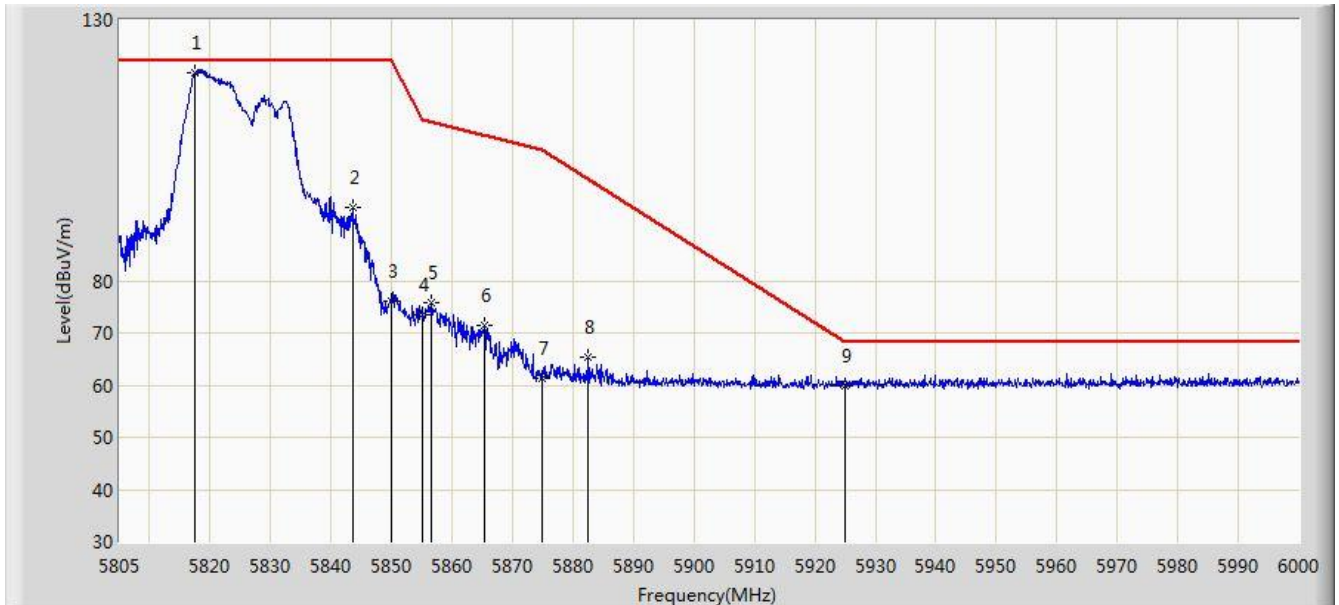


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5817.480        | 119.908                | 114.364              | N/A             | N/A            | 5.544       | PK   |
| 2  |      |      | 5843.513        | 93.918                 | 88.222               | -28.282         | 122.200        | 5.697       | PK   |
| 3  |      |      | 5850.000        | 75.985                 | 70.259               | -46.215         | 122.200        | 5.726       | PK   |
| 4  |      |      | 5855.000        | 73.619                 | 67.873               | -37.181         | 110.800        | 5.746       | PK   |
| 5  |      |      | 5856.675        | 75.661                 | 69.908               | -34.669         | 110.330        | 5.754       | PK   |
| 6  |      |      | 5865.353        | 71.458                 | 65.671               | -36.441         | 107.899        | 5.787       | PK   |
| 7  |      |      | 5875.000        | 61.238                 | 55.418               | -43.962         | 105.200        | 5.820       | PK   |
| 8  |      |      | 5882.513        | 65.364                 | 59.518               | -34.257         | 99.620         | 5.846       | PK   |
| 9  |      |      | 5925.000        | 59.830                 | 53.864               | -8.370          | 68.200         | 5.967       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/26 - 23:32 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0 + 1 + 2 + 3 |                          |

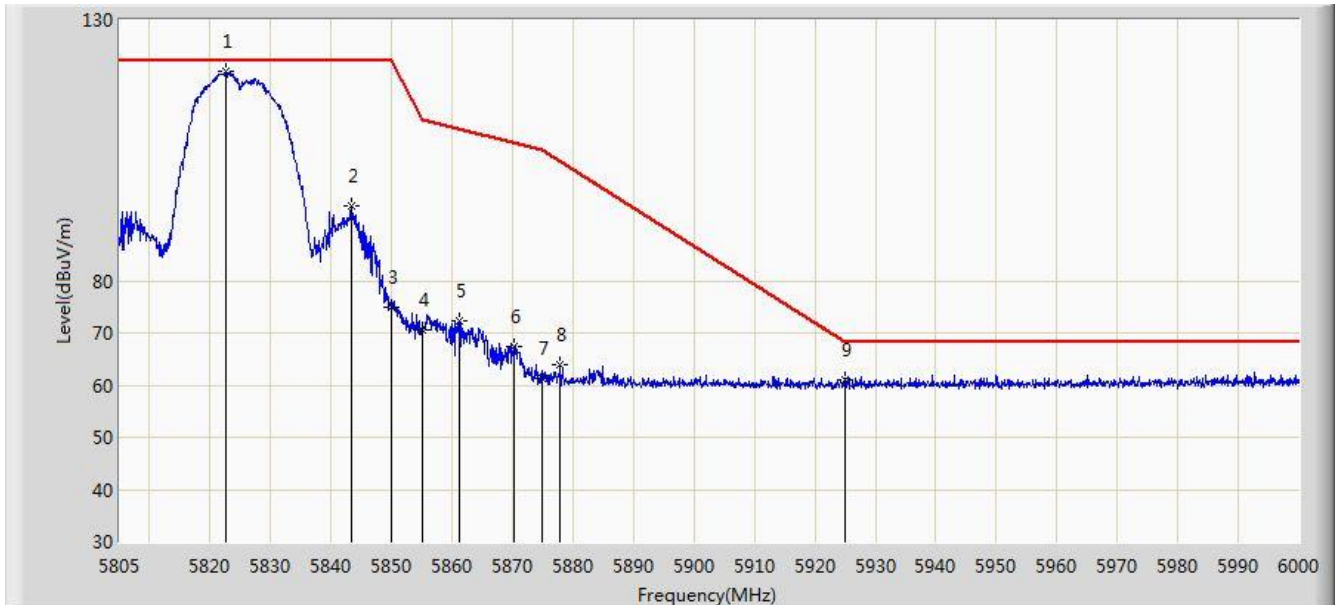


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5822.550        | 120.116                | 114.542              | N/A             | N/A            | 5.573       | PK   |
| 2  |      |      | 5843.317        | 94.381                 | 88.686               | -27.819         | 122.200        | 5.694       | PK   |
| 3  |      |      | 5850.000        | 75.026                 | 69.300               | -47.174         | 122.200        | 5.726       | PK   |
| 4  |      |      | 5855.000        | 70.624                 | 64.878               | -40.176         | 110.800        | 5.746       | PK   |
| 5  |      |      | 5861.257        | 72.303                 | 66.531               | -36.743         | 109.046        | 5.772       | PK   |
| 6  |      |      | 5870.228        | 67.430                 | 61.627               | -39.104         | 106.534        | 5.803       | PK   |
| 7  |      |      | 5875.000        | 61.195                 | 55.375               | -44.005         | 105.200        | 5.820       | PK   |
| 8  |      |      | 5877.833        | 64.015                 | 58.185               | -39.081         | 103.095        | 5.830       | PK   |
| 9  |      |      | 5925.000        | 61.058                 | 55.092               | -7.142          | 68.200         | 5.967       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/26 - 23:58 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

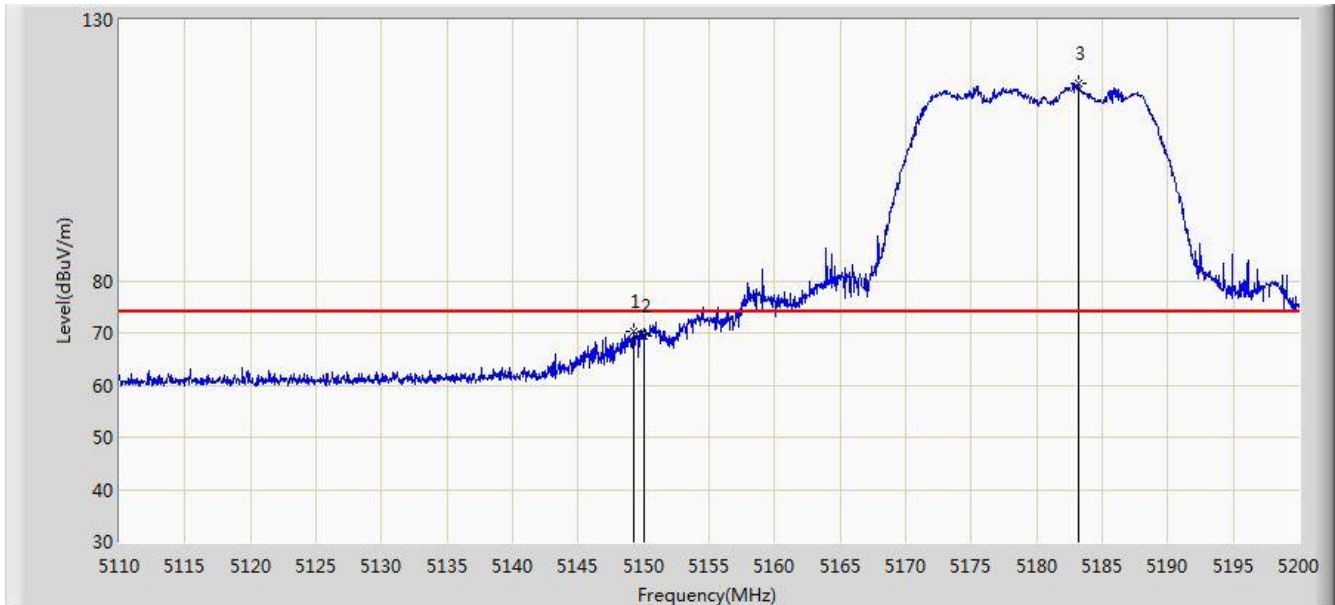


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.285        | 70.292                 | 66.120               | -3.708          | 74.000         | 4.171       | PK   |
| 2  |      |      | 5150.000        | 69.448                 | 65.279               | -4.552          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5183.170        | 117.814                | 113.756              | N/A             | N/A            | 4.057       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/26 - 23:59 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

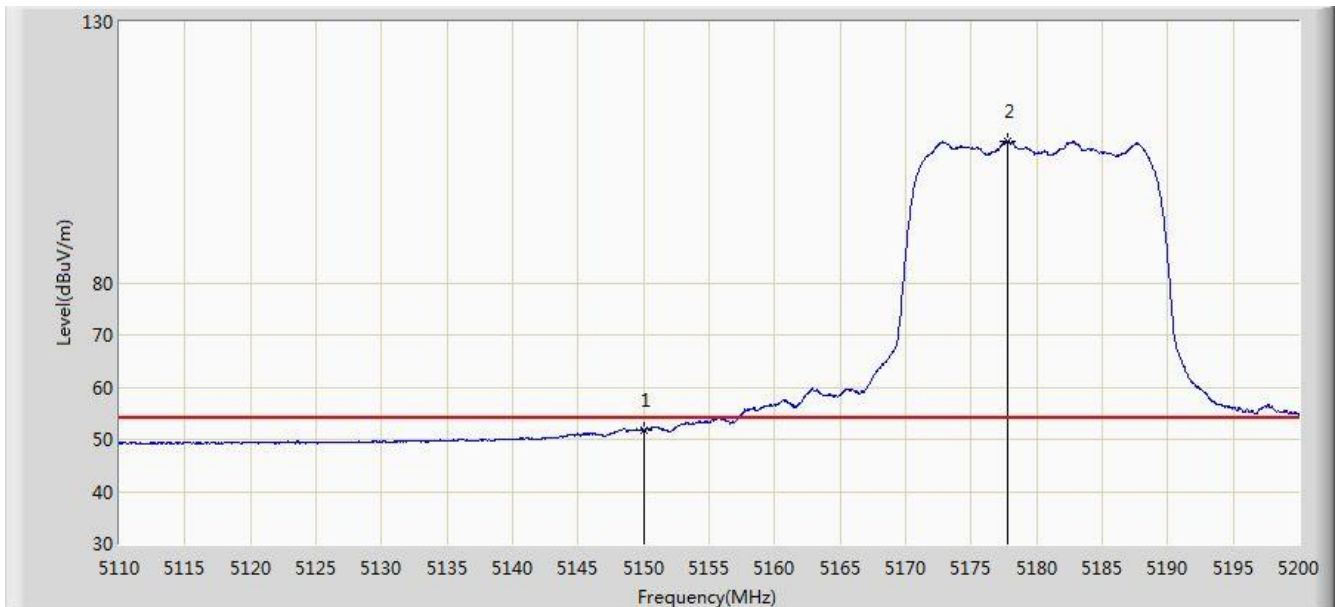


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 51.773                 | 47.604               | -2.227          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5177.770        | 107.204                | 103.127              | N/A             | N/A            | 4.076       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: AC1                                                | Time: 2018/06/26 - 23:55 |
| Limit: FCC_Part15.209_RE(3m)                             | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                              | Polarity: Vertical       |
| EUT: ACCESS POINT                                        | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz |                          |

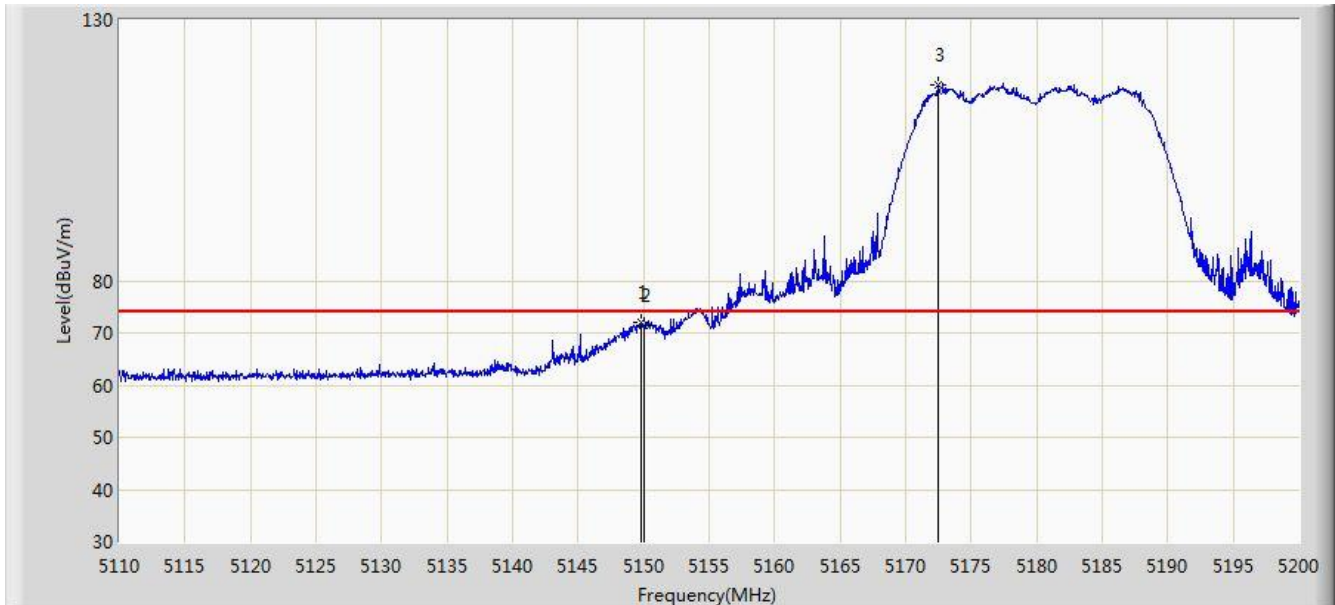


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.780        | 71.933                 | 67.763               | -2.067          | 74.000         | 4.169       | PK   |
| 2  |      |      | 5150.000        | 71.499                 | 67.330               | -2.501          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5172.460        | 117.539                | 113.443              | N/A             | N/A            | 4.096       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/26 - 23:57 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

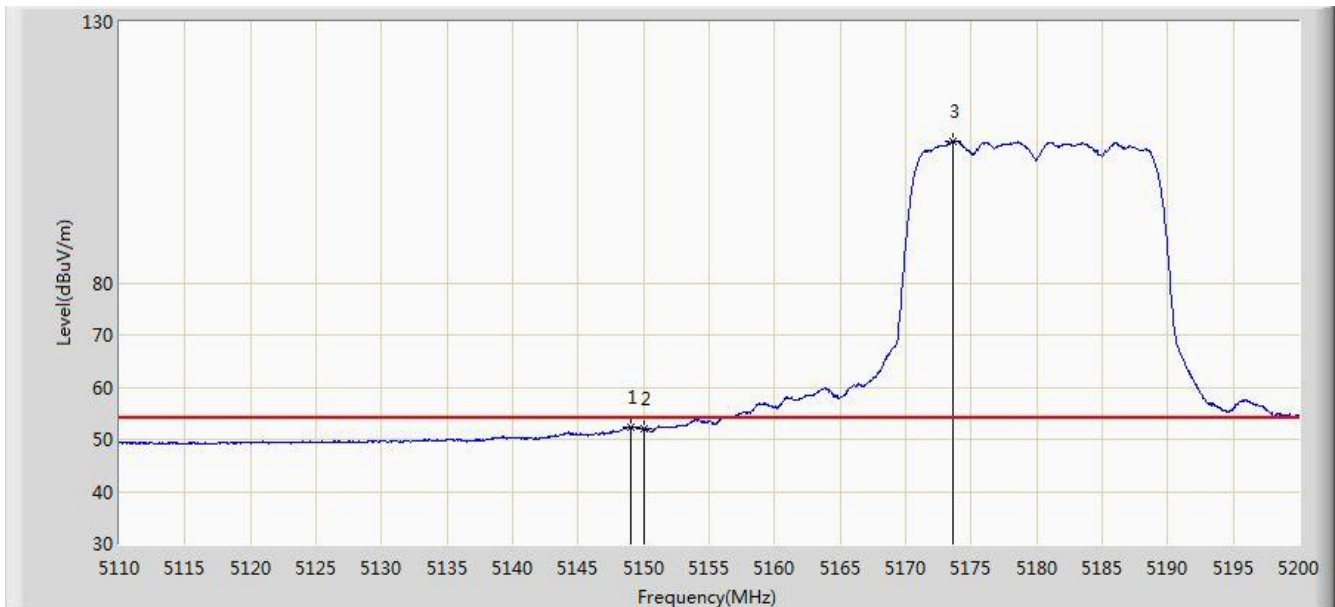


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.015        | 52.295                 | 48.123               | -1.705          | 54.000         | 4.173       | AV   |
| 2  |      |      | 5150.000        | 52.065                 | 47.896               | -1.935          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5173.585        | 107.194                | 103.102              | N/A             | N/A            | 4.092       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 00:19 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 |                          |

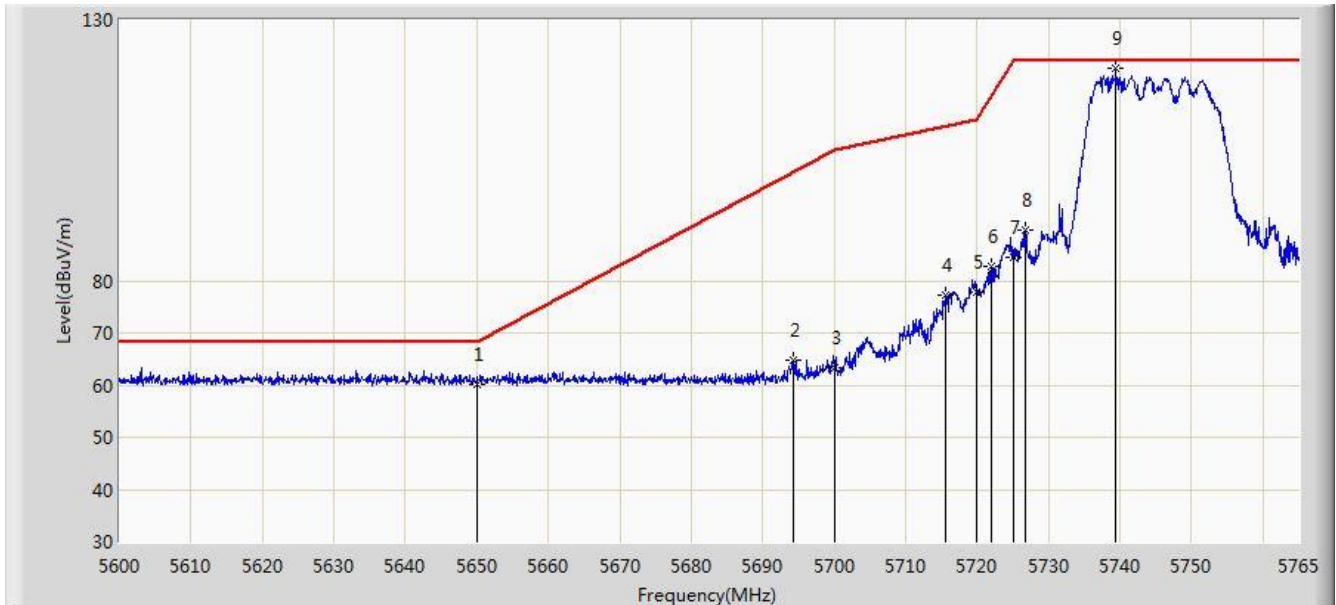


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5650.000        | 60.245                 | 55.574               | -7.955          | 68.200         | 4.671       | PK   |
| 2  |      |      | 5694.380        | 64.671                 | 59.823               | -36.386         | 101.057        | 4.849       | PK   |
| 3  |      |      | 5700.000        | 63.428                 | 58.550               | -41.772         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5715.500        | 77.239                 | 72.271               | -32.303         | 109.542        | 4.968       | PK   |
| 5  |      |      | 5720.000        | 77.715                 | 72.718               | -33.085         | 110.800        | 4.997       | PK   |
| 6  |      |      | 5722.018        | 82.722                 | 77.712               | -32.680         | 115.402        | 5.010       | PK   |
| 7  |      |      | 5725.000        | 84.635                 | 79.606               | -37.565         | 122.200        | 5.029       | PK   |
| 8  |      |      | 5726.720        | 89.850                 | 84.810               | -32.350         | 122.200        | 5.040       | PK   |
| 9  |      | *    | 5739.425        | 120.588                | 115.467              | N/A             | N/A            | 5.122       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 00:21 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 |                          |

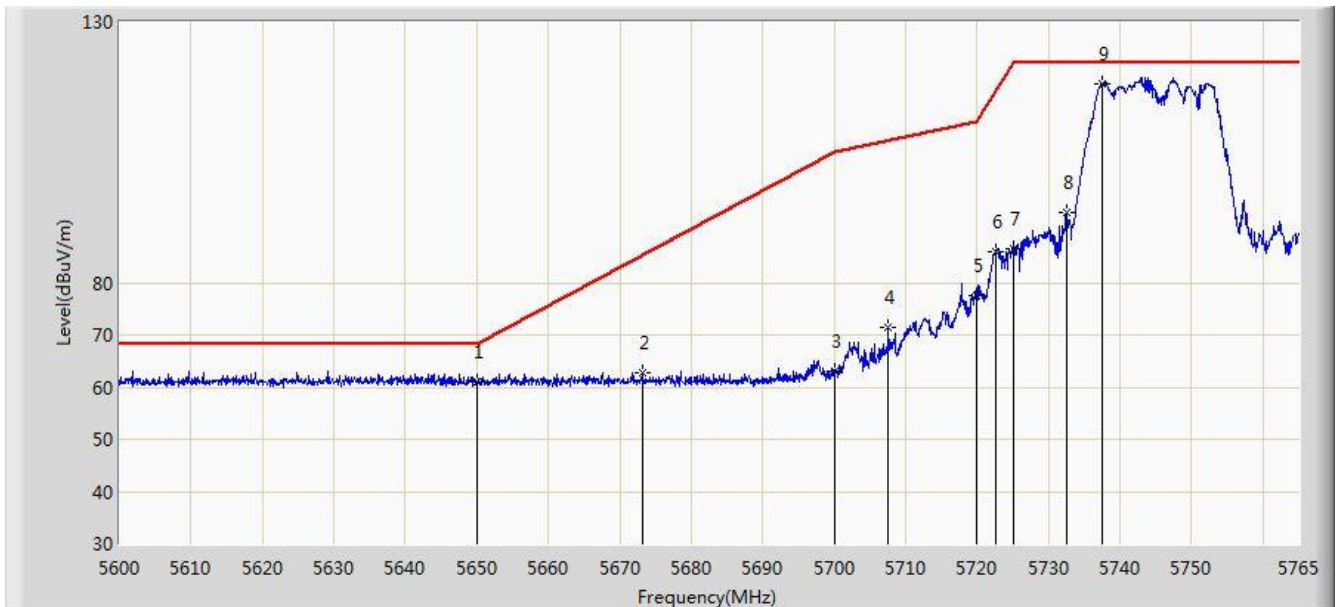


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5650.000        | 61.006                 | 56.335               | -7.194          | 68.200         | 4.671       | PK   |
| 2  |      |      | 5673.095        | 62.663                 | 57.903               | -22.668         | 85.331         | 4.760       | PK   |
| 3  |      |      | 5700.000        | 63.081                 | 58.203               | -42.119         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5707.580        | 71.403                 | 66.484               | -35.922         | 107.325        | 4.918       | PK   |
| 5  |      |      | 5720.000        | 77.650                 | 72.653               | -33.150         | 110.800        | 4.997       | PK   |
| 6  |      |      | 5722.513        | 85.885                 | 80.872               | -30.646         | 116.531        | 5.014       | PK   |
| 7  |      |      | 5725.000        | 86.398                 | 81.369               | -35.802         | 122.200        | 5.029       | PK   |
| 8  |      |      | 5732.495        | 93.481                 | 88.404               | -28.719         | 122.200        | 5.076       | PK   |
| 9  |      | *    | 5737.445        | 118.108                | 113.000              | N/A             | N/A            | 5.108       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 00:27 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 |                          |

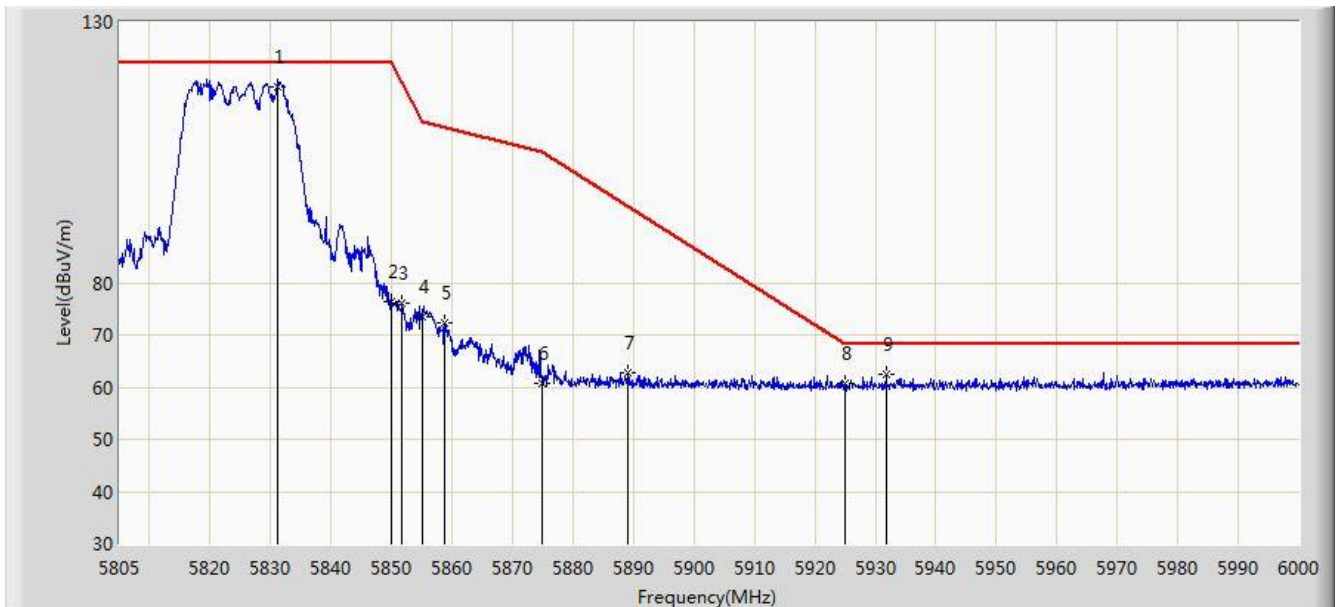


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5831.033        | 117.494                | 111.871              | N/A             | N/A            | 5.623       | PK   |
| 2  |      |      | 5850.000        | 76.442                 | 70.716               | -45.758         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5851.703        | 76.141                 | 70.408               | -42.175         | 118.316        | 5.732       | PK   |
| 4  |      |      | 5855.000        | 73.368                 | 67.622               | -37.432         | 110.800        | 5.746       | PK   |
| 5  |      |      | 5858.723        | 72.198                 | 66.436               | -37.558         | 109.756        | 5.761       | PK   |
| 6  |      |      | 5875.000        | 60.800                 | 54.980               | -44.400         | 105.200        | 5.820       | PK   |
| 7  |      |      | 5888.947        | 62.733                 | 56.865               | -32.115         | 94.848         | 5.867       | PK   |
| 8  |      |      | 5925.000        | 60.690                 | 54.724               | -7.510          | 68.200         | 5.967       | PK   |
| 9  |      |      | 5931.750        | 62.477                 | 56.494               | -5.723          | 68.200         | 5.983       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 00:24 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 |                          |

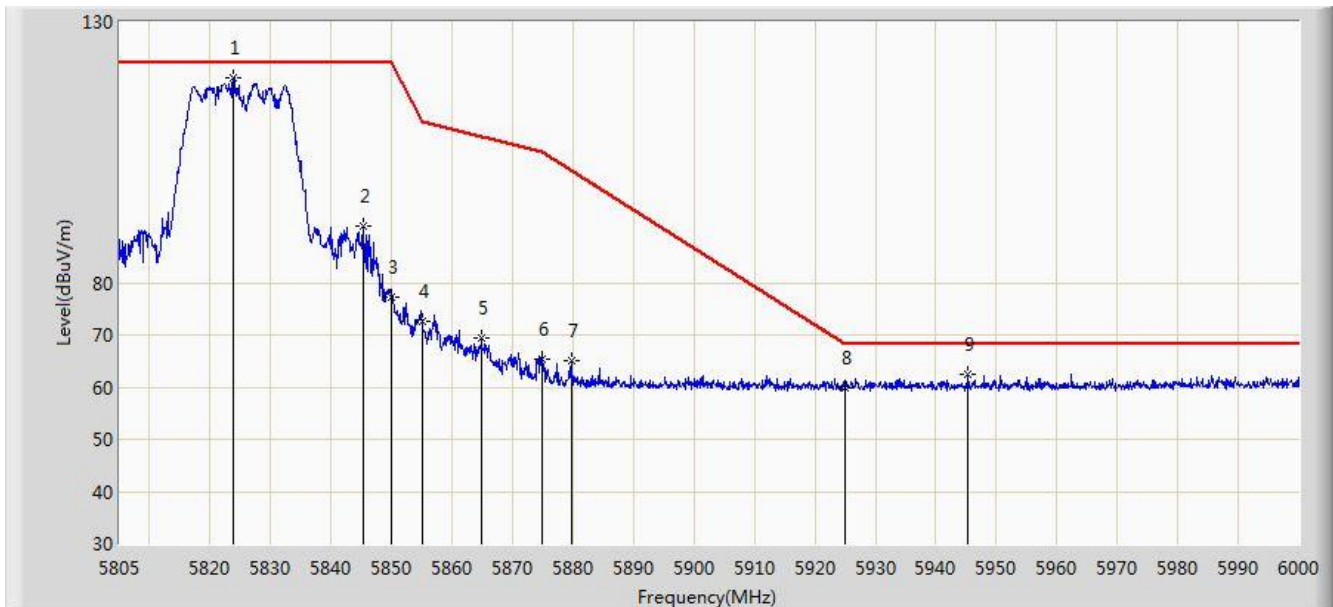


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5823.720        | 119.406                | 113.826              | N/A             | N/A            | 5.580       | PK   |
| 2  |      |      | 5845.365        | 90.894                 | 85.188               | -31.306         | 122.200        | 5.707       | PK   |
| 3  |      |      | 5850.000        | 77.373                 | 71.647               | -44.827         | 122.200        | 5.726       | PK   |
| 4  |      |      | 5855.000        | 72.743                 | 66.997               | -38.057         | 110.800        | 5.746       | PK   |
| 5  |      |      | 5864.865        | 69.329                 | 63.544               | -38.706         | 108.035        | 5.785       | PK   |
| 6  |      |      | 5875.000        | 65.415                 | 59.595               | -39.785         | 105.200        | 5.820       | PK   |
| 7  |      |      | 5879.783        | 65.123                 | 59.287               | -36.524         | 101.647        | 5.837       | PK   |
| 8  |      |      | 5925.000        | 59.821                 | 53.855               | -8.379          | 68.200         | 5.967       | PK   |
| 9  |      |      | 5945.303        | 62.419                 | 56.403               | -5.781          | 68.200         | 6.016       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 00:37 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

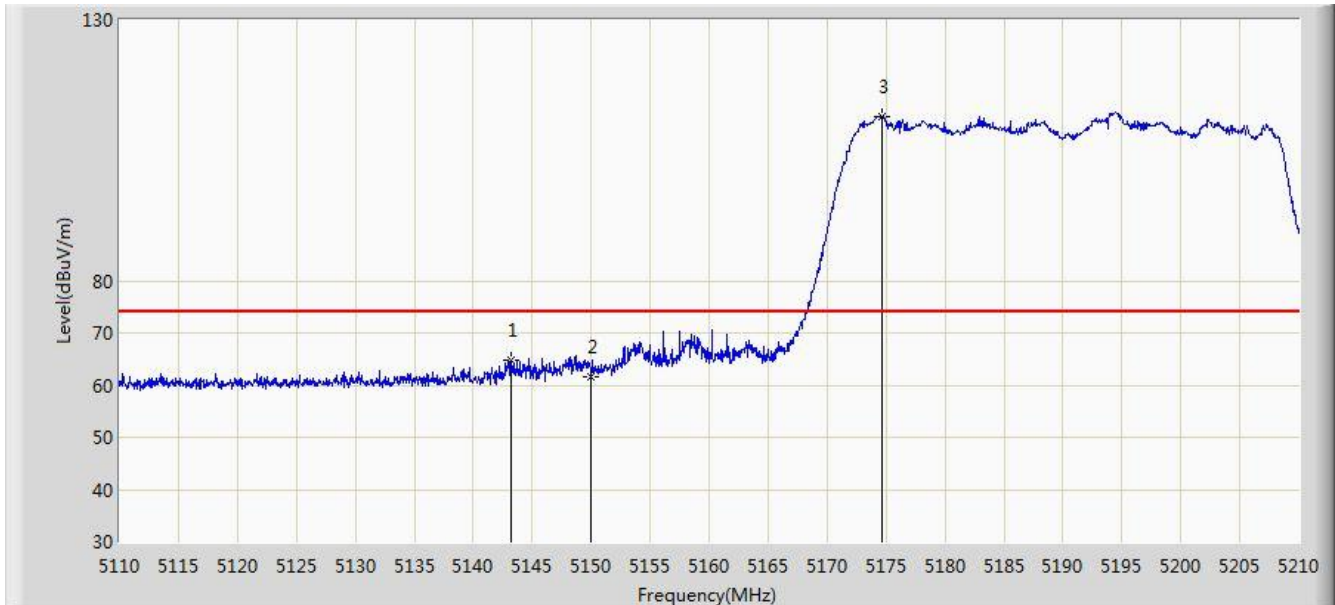


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5143.200        | 64.664                 | 60.488               | -9.336          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 61.665                 | 57.496               | -12.335         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5174.650        | 111.433                | 107.345              | N/A             | N/A            | 4.088       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 00:39 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

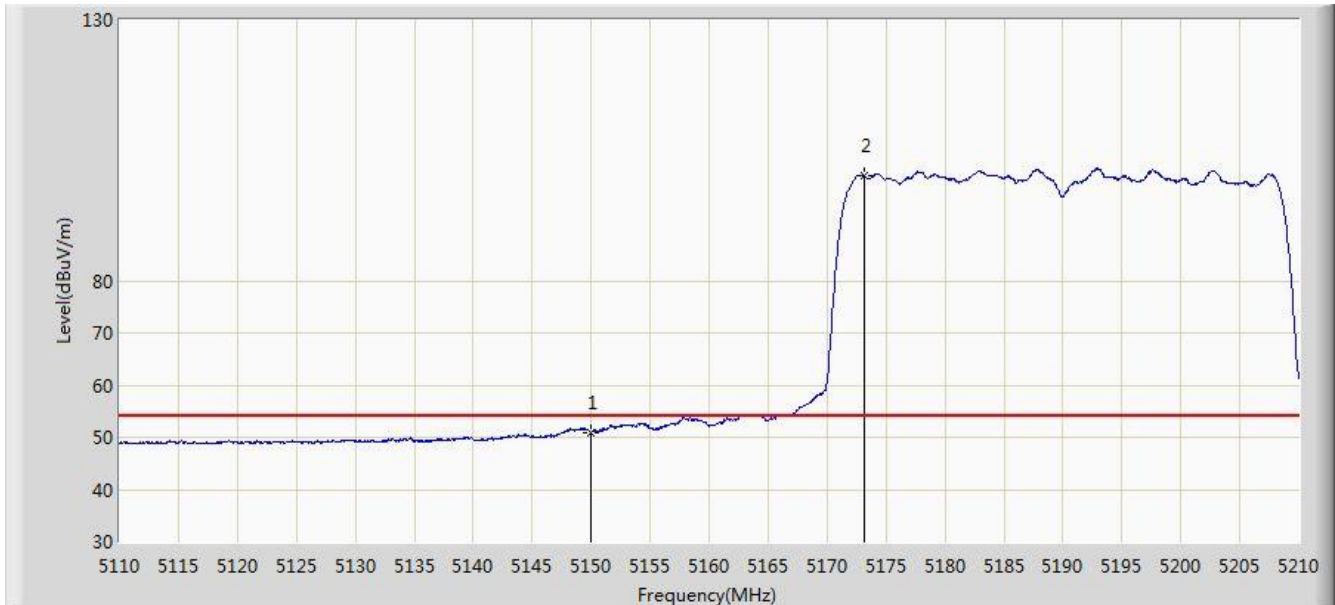


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.865                 | 46.696               | -3.135          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5173.100        | 100.072                | 95.979               | N/A             | N/A            | 4.093       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 00:33 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

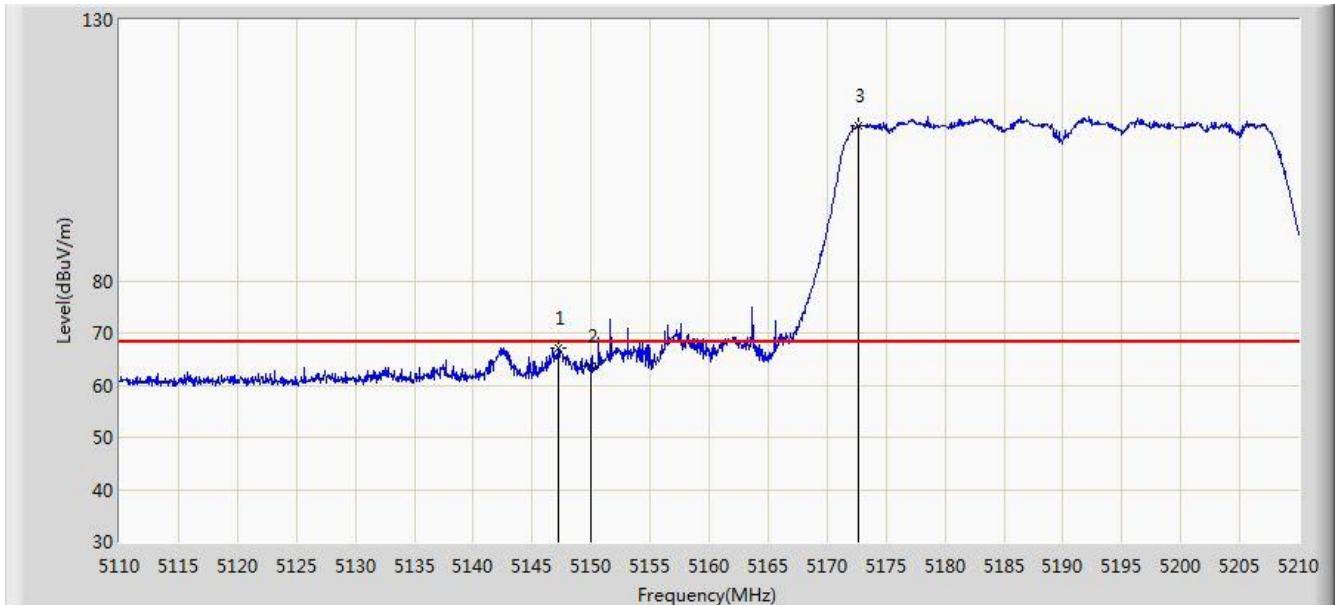


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.200        | 67.016                 | 62.840               | -1.184          | 68.200         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 63.693                 | 59.524               | -4.507          | 68.200         | 4.170       | PK   |
| 3  |      | *    | 5172.600        | 109.698                | 105.603              | N/A             | N/A            | 4.095       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 00:34 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

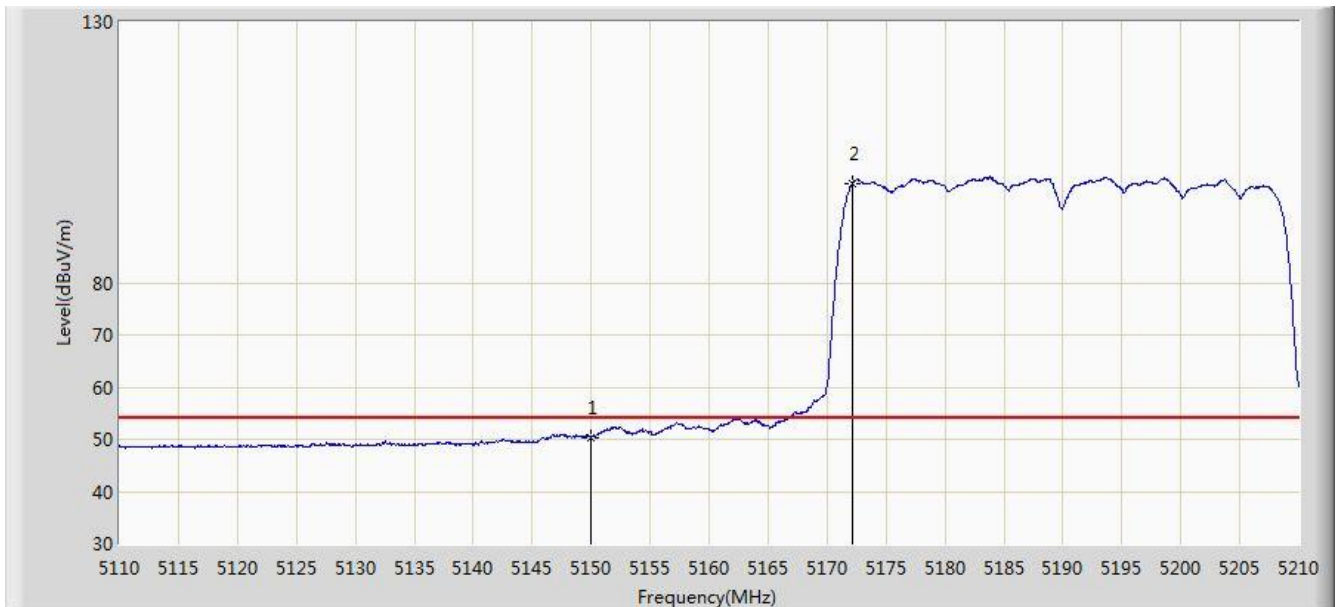


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.420                 | 46.251               | -3.580          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5172.100        | 98.867                 | 94.770               | N/A             | N/A            | 4.097       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 01:16 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 |                          |

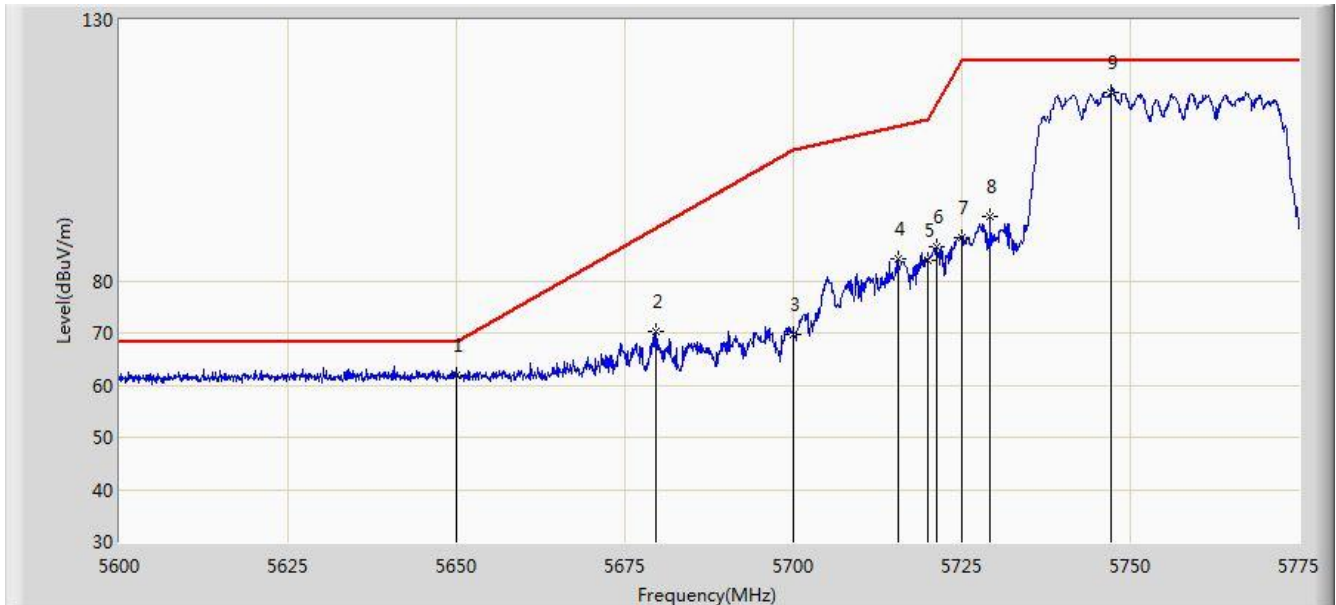


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5650.000        | 61.888                 | 57.217               | -6.312          | 68.200         | 4.671       | PK   |
| 2  |      |      | 5679.712        | 70.149                 | 65.363               | -20.077         | 90.226         | 4.786       | PK   |
| 3  |      |      | 5700.000        | 69.716                 | 64.838               | -35.484         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5715.500        | 84.218                 | 79.250               | -25.324         | 109.542        | 4.968       | PK   |
| 5  |      |      | 5720.000        | 83.980                 | 78.983               | -26.820         | 110.800        | 4.997       | PK   |
| 6  |      |      | 5721.187        | 86.500                 | 81.496               | -27.007         | 113.507        | 5.005       | PK   |
| 7  |      |      | 5725.000        | 88.323                 | 83.294               | -33.877         | 122.200        | 5.029       | PK   |
| 8  |      |      | 5729.150        | 92.306                 | 87.251               | -29.894         | 122.200        | 5.055       | PK   |
| 9  |      | *    | 5747.087        | 116.217                | 111.050              | N/A             | N/A            | 5.166       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 01:14 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 |                          |

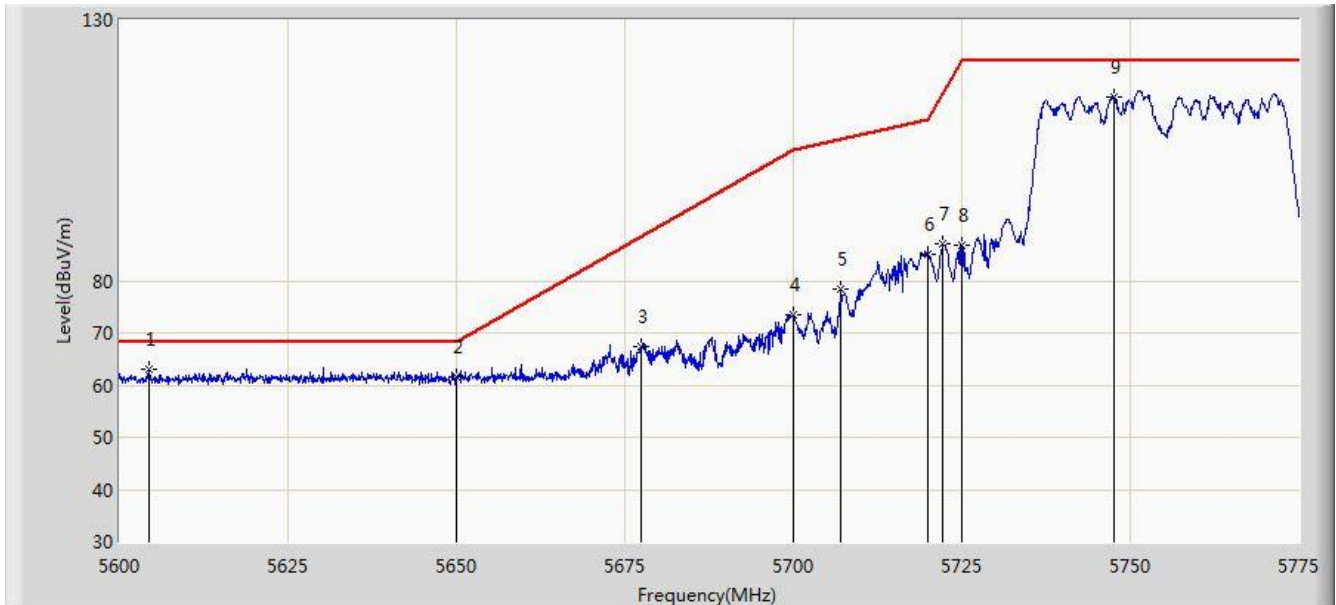


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5604.288        | 63.178                 | 58.641               | -5.022          | 68.200         | 4.537       | PK   |
| 2  |      |      | 5650.000        | 61.463                 | 56.792               | -6.737          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5677.350        | 67.465                 | 62.688               | -21.015         | 88.479         | 4.777       | PK   |
| 4  |      |      | 5700.000        | 73.405                 | 68.527               | -31.795         | 105.200        | 4.878       | PK   |
| 5  |      |      | 5706.925        | 78.510                 | 73.595               | -28.631         | 107.141        | 4.915       | PK   |
| 6  |      |      | 5720.000        | 85.010                 | 80.013               | -25.790         | 110.800        | 4.997       | PK   |
| 7  |      |      | 5722.237        | 87.070                 | 82.059               | -28.831         | 115.902        | 5.012       | PK   |
| 8  |      |      | 5725.000        | 86.778                 | 81.749               | -35.422         | 122.200        | 5.029       | PK   |
| 9  |      |      | 5747.525        | 115.266                | 110.097              | N/A             | N/A            | 5.170       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 01:18 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 |                          |

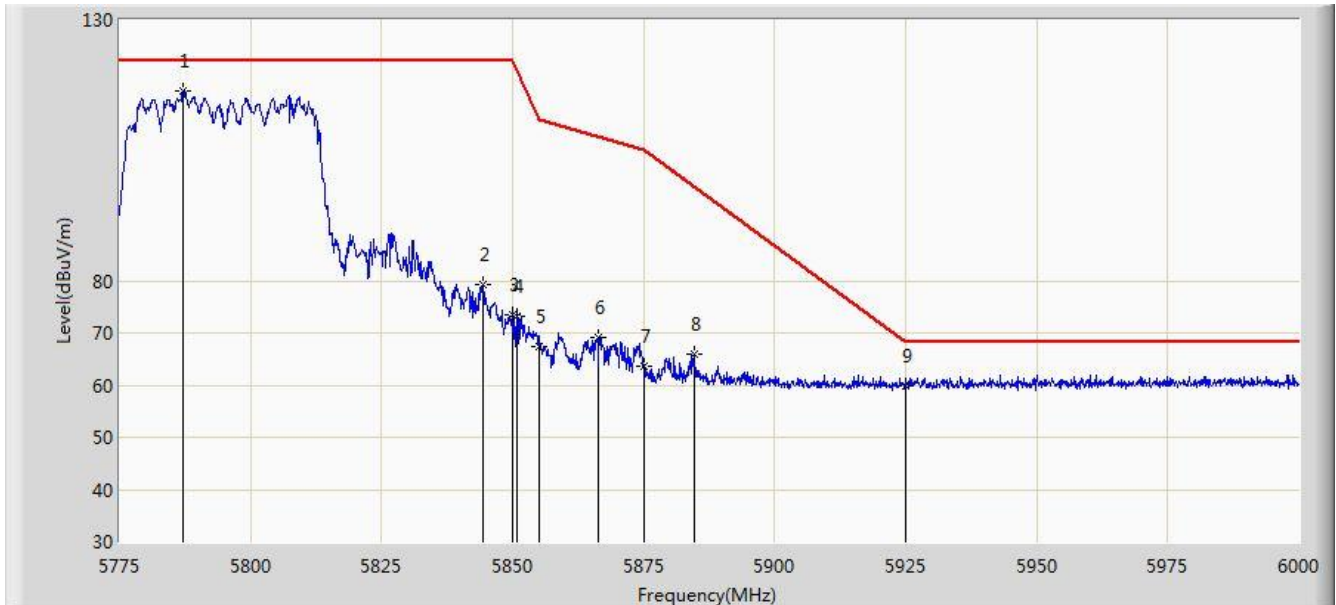


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5787.263        | 116.500                | 111.122              | N/A             | N/A            | 5.378       | PK   |
| 2  |      |      | 5844.300        | 79.239                 | 73.538               | -42.961         | 122.200        | 5.701       | PK   |
| 3  |      |      | 5850.000        | 73.334                 | 67.608               | -48.866         | 122.200        | 5.726       | PK   |
| 4  |      |      | 5850.825        | 73.233                 | 67.504               | -47.085         | 120.318        | 5.729       | PK   |
| 5  |      |      | 5855.000        | 67.488                 | 61.742               | -43.312         | 110.800        | 5.746       | PK   |
| 6  |      |      | 5866.462        | 69.109                 | 63.318               | -38.480         | 107.588        | 5.790       | PK   |
| 7  |      |      | 5875.000        | 63.748                 | 57.928               | -41.452         | 105.200        | 5.820       | PK   |
| 8  |      |      | 5884.687        | 66.062                 | 60.209               | -31.945         | 98.007         | 5.853       | PK   |
| 9  |      |      | 5925.000        | 59.791                 | 53.825               | -8.409          | 68.200         | 5.967       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 01:20 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 |                          |

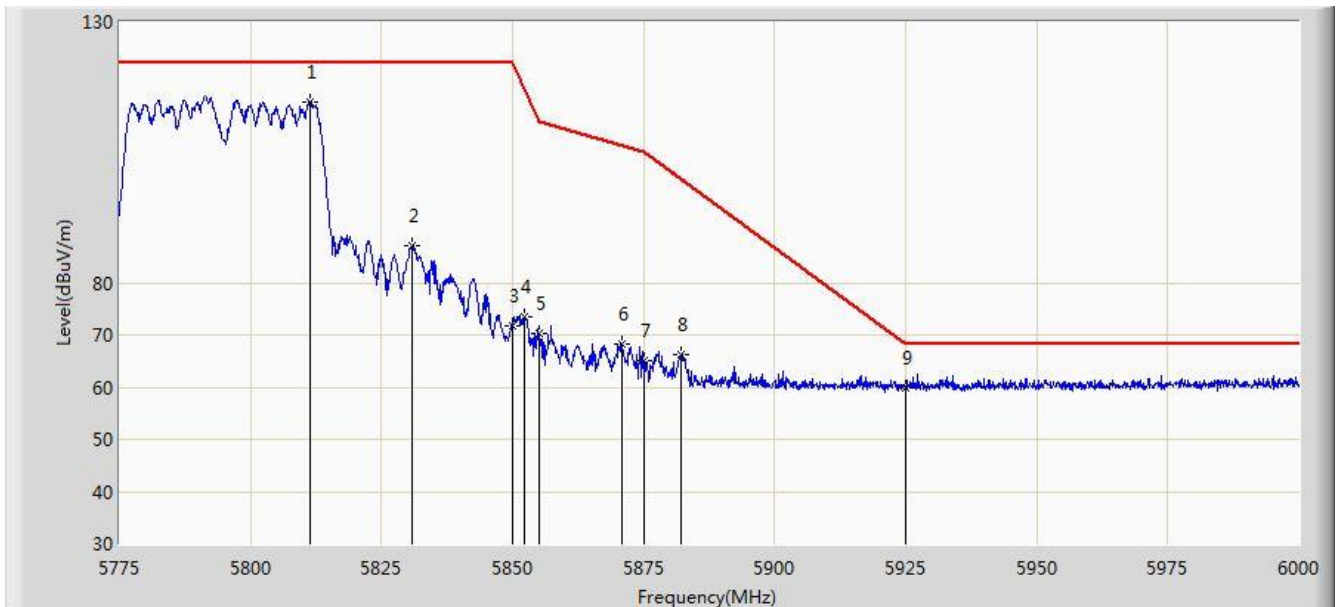


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5811.450        | 114.636                | 109.127              | N/A             | N/A            | 5.509       | PK   |
| 2  |      |      | 5830.913        | 87.110                 | 81.488               | -35.090         | 122.200        | 5.622       | PK   |
| 3  |      |      | 5850.000        | 71.681                 | 65.955               | -50.519         | 122.200        | 5.726       | PK   |
| 4  |      |      | 5852.288        | 73.390                 | 67.655               | -43.592         | 116.982        | 5.735       | PK   |
| 5  |      |      | 5855.000        | 70.191                 | 64.445               | -40.609         | 110.800        | 5.746       | PK   |
| 6  |      |      | 5870.850        | 68.404                 | 62.598               | -37.957         | 106.360        | 5.805       | PK   |
| 7  |      |      | 5875.000        | 65.017                 | 59.197               | -40.183         | 105.200        | 5.820       | PK   |
| 8  |      |      | 5882.212        | 66.295                 | 60.450               | -33.549         | 99.844         | 5.845       | PK   |
| 9  |      |      | 5925.000        | 59.966                 | 54.000               | -8.234          | 68.200         | 5.967       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 02:31 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

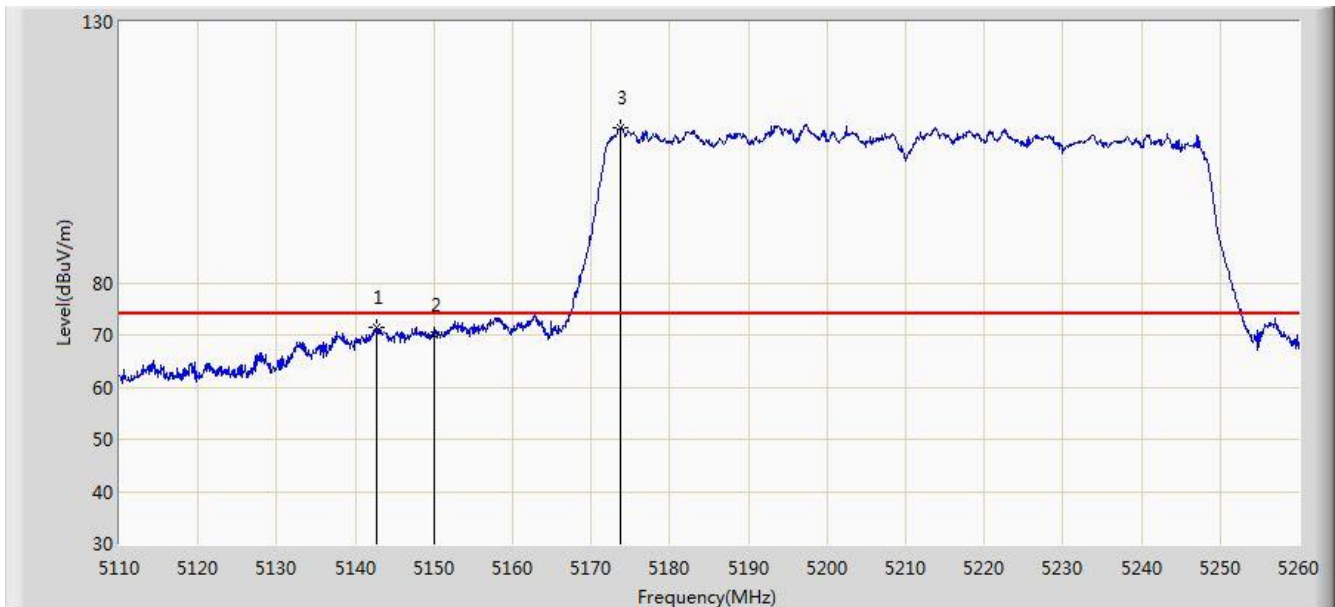


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5142.625        | 71.484                 | 67.308               | -2.516          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 70.074                 | 65.905               | -3.926          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5173.675        | 109.734                | 105.643              | N/A             | N/A            | 4.091       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 02:32 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

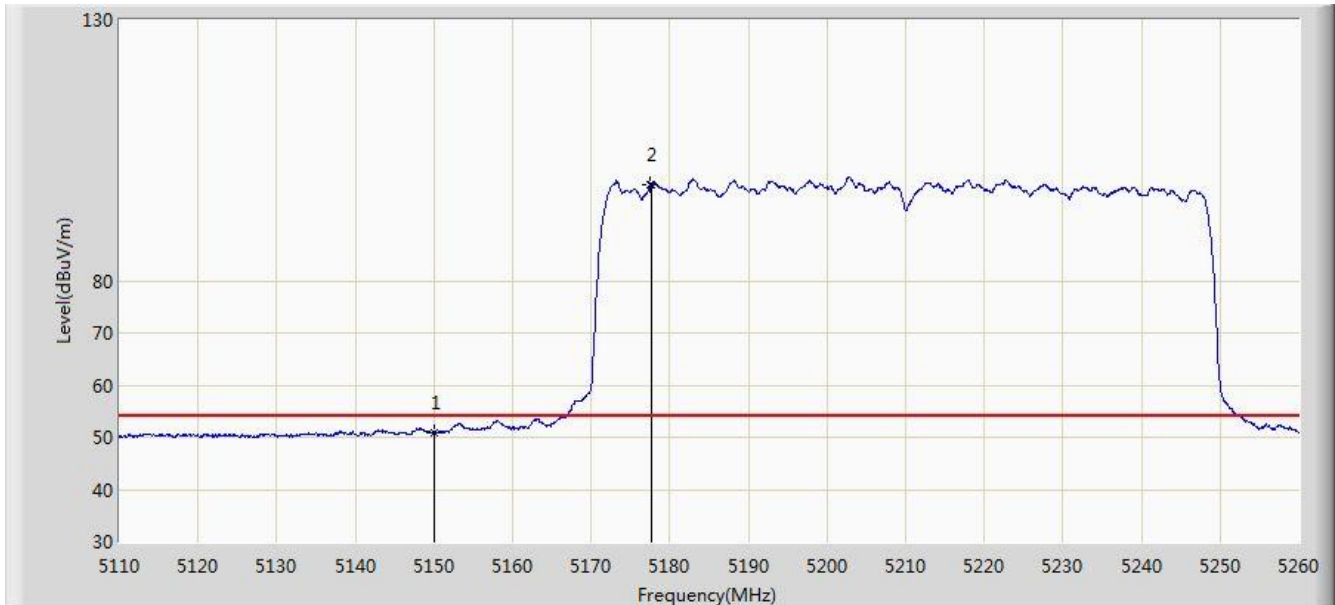


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.990                 | 46.821               | -3.010          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5177.575        | 98.492                 | 94.415               | N/A             | N/A            | 4.077       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 01:57 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

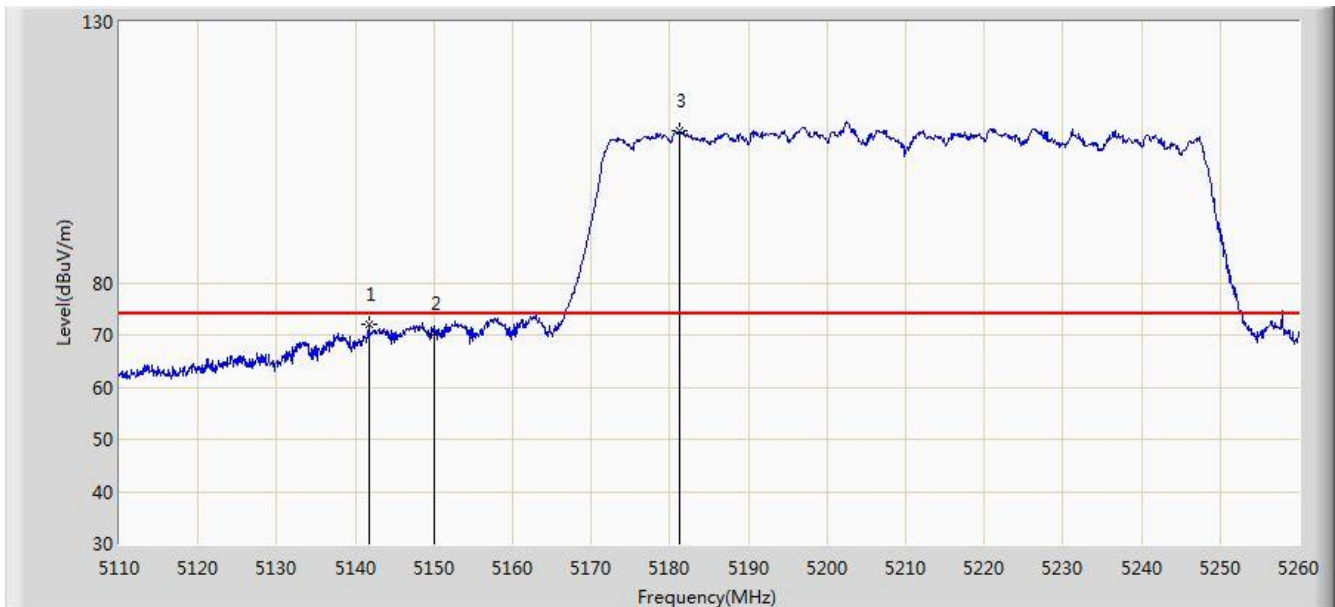


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5141.725        | 72.083                 | 67.907               | -1.917          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 70.360                 | 66.191               | -3.640          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5181.175        | 109.118                | 105.053              | N/A             | N/A            | 4.064       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 02:00 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

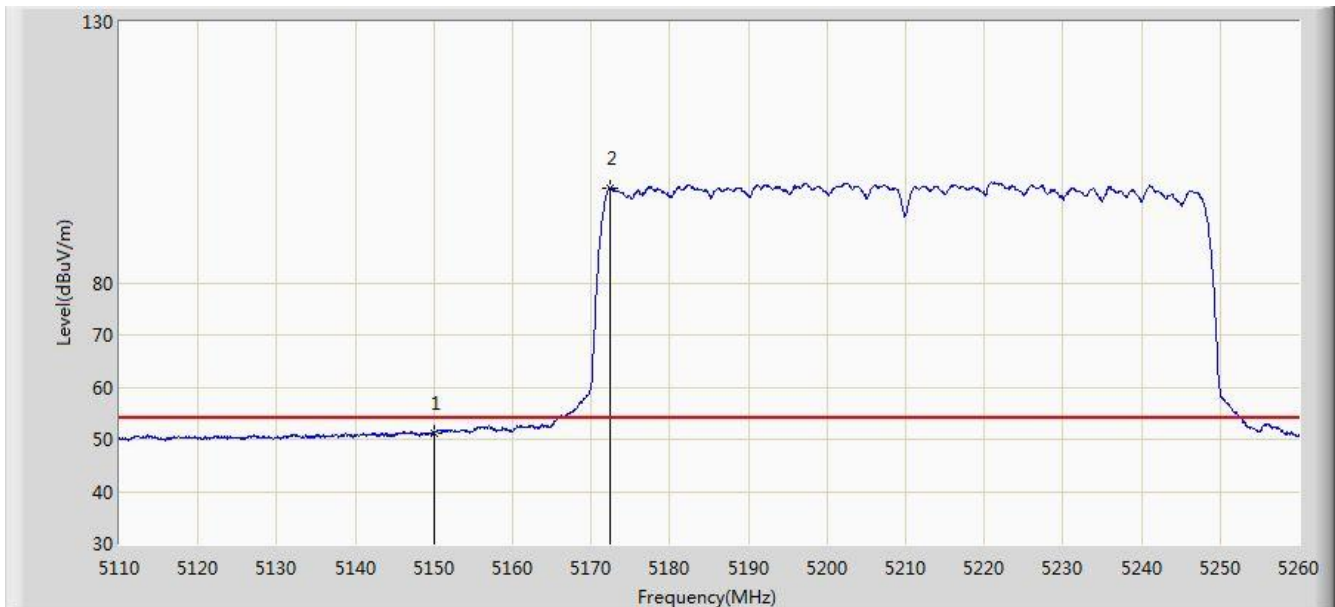


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 51.301                 | 47.132               | -2.699          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5172.475        | 98.176                 | 94.080               | N/A             | N/A            | 4.095       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 03:18 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 |                          |

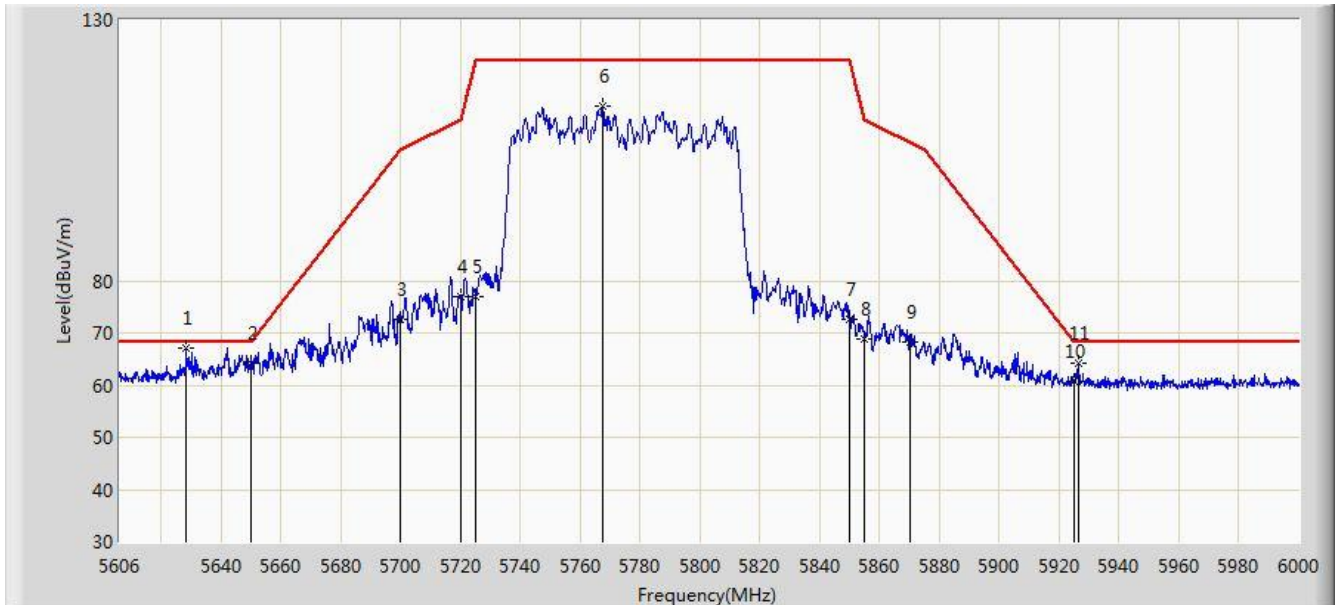


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5628.458        | 67.225                 | 62.620               | -0.975          | 68.200         | 4.604       | PK   |
| 2  |      |      | 5650.000        | 64.302                 | 59.631               | -3.898          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 72.722                 | 67.844               | -32.478         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 76.963                 | 71.966               | -33.837         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 76.972                 | 71.943               | -45.228         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5767.343        | 113.352                | 108.075              | N/A             | N/A            | 5.278       | PK   |
| 7  |      |      | 5850.000        | 72.744                 | 67.018               | -49.456         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 68.931                 | 63.185               | -41.869         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5870.000        | 68.240                 | 62.437               | -38.359         | 106.598        | 5.803       | PK   |
| 10 |      |      | 5925.000        | 60.791                 | 54.825               | -7.409          | 68.200         | 5.967       | PK   |
| 11 |      |      | 5926.322        | 64.082                 | 58.112               | -4.118          | 68.200         | 5.970       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/27 - 03:19 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 |                          |

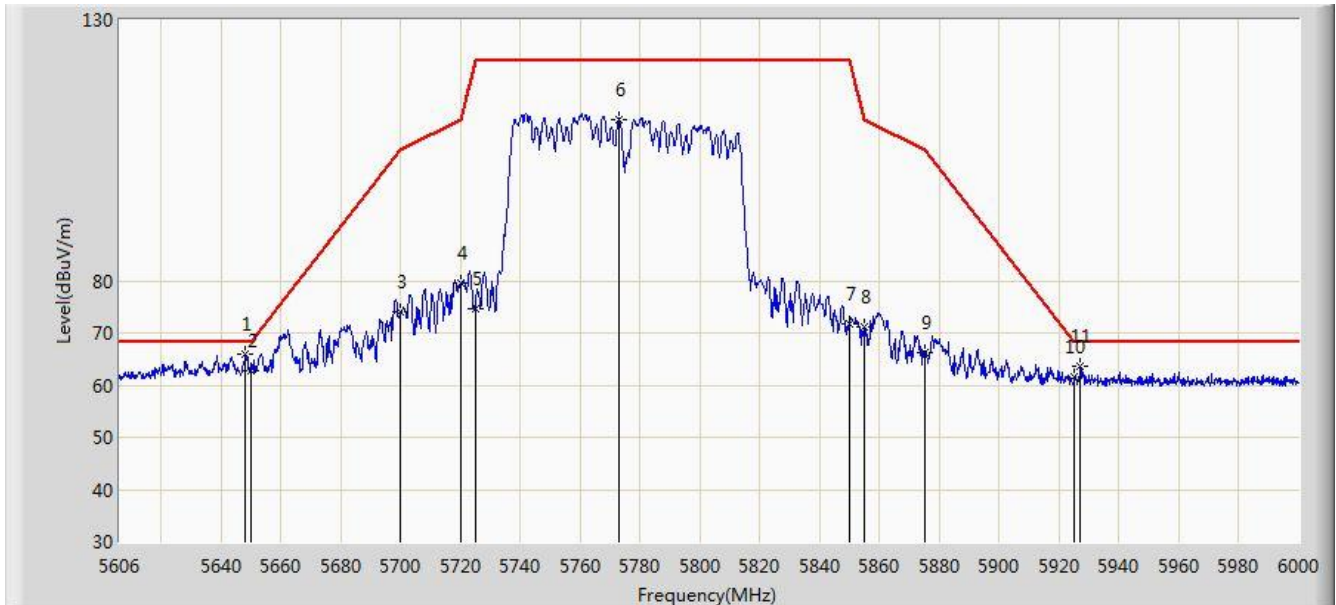

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5648.158        | 66.030                 | 61.365               | -2.170          | 68.200         | 4.665       | PK   |
| 2  |      |      | 5650.000        | 62.802                 | 58.131               | -5.398          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 74.145                 | 69.267               | -31.055         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 79.491                 | 74.494               | -31.309         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 74.620                 | 69.591               | -47.580         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5773.056        | 110.907                | 105.601              | N/A             | N/A            | 5.307       | PK   |
| 7  |      |      | 5850.000        | 71.799                 | 66.073               | -50.401         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 71.141                 | 65.395               | -39.659         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 66.177                 | 60.357               | -39.023         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 61.561                 | 55.595               | -6.639          | 68.200         | 5.967       | PK   |
| 11 |      |      | 5927.110        | 63.662                 | 57.690               | -4.538          | 68.200         | 5.972       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 03:47 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5146.360        | 68.558                 | 64.382               | -5.442          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5146.360        | 68.558                 | 64.382               | -5.442          | 74.000         | 4.176       | PK   |
| 3  |      |      | 5150.000        | 66.176                 | 62.007               | -7.824          | 74.000         | 4.170       | PK   |
| 4  |      | *    | 5173.135        | 119.466                | 115.373              | N/A             | N/A            | 4.093       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 03:52 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

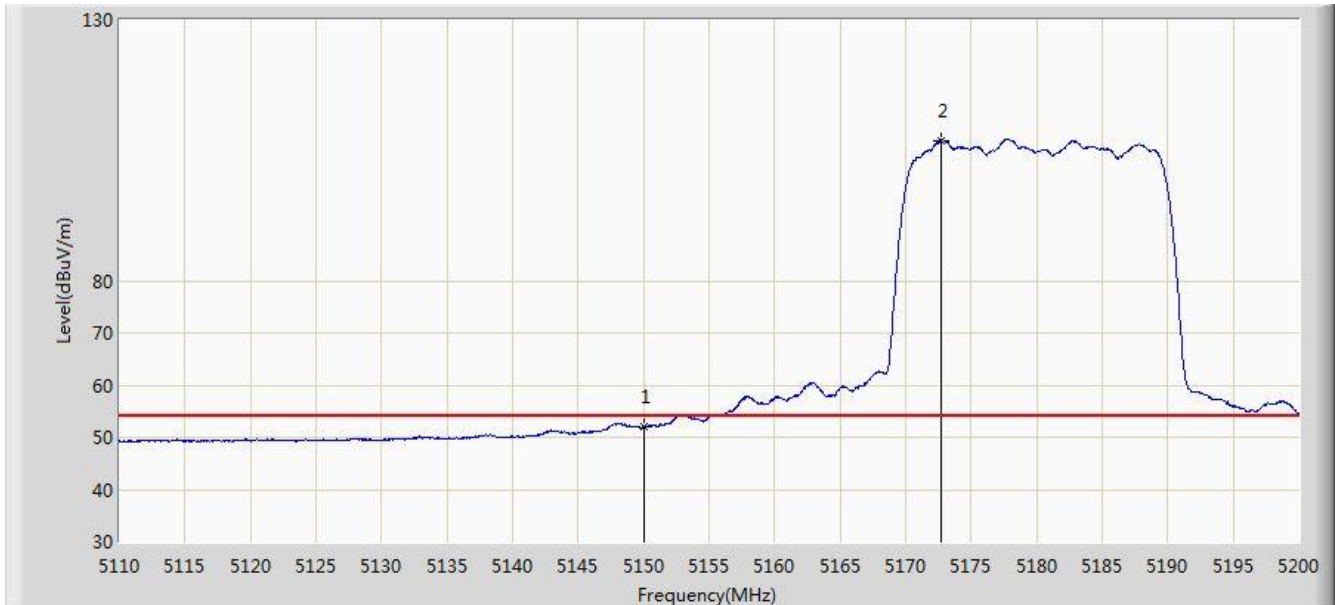


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.047                 | 45.485               | -1.953          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5172.685        | 106.883                | 100.381              | N/A             | N/A            | 6.502       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 03:48 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

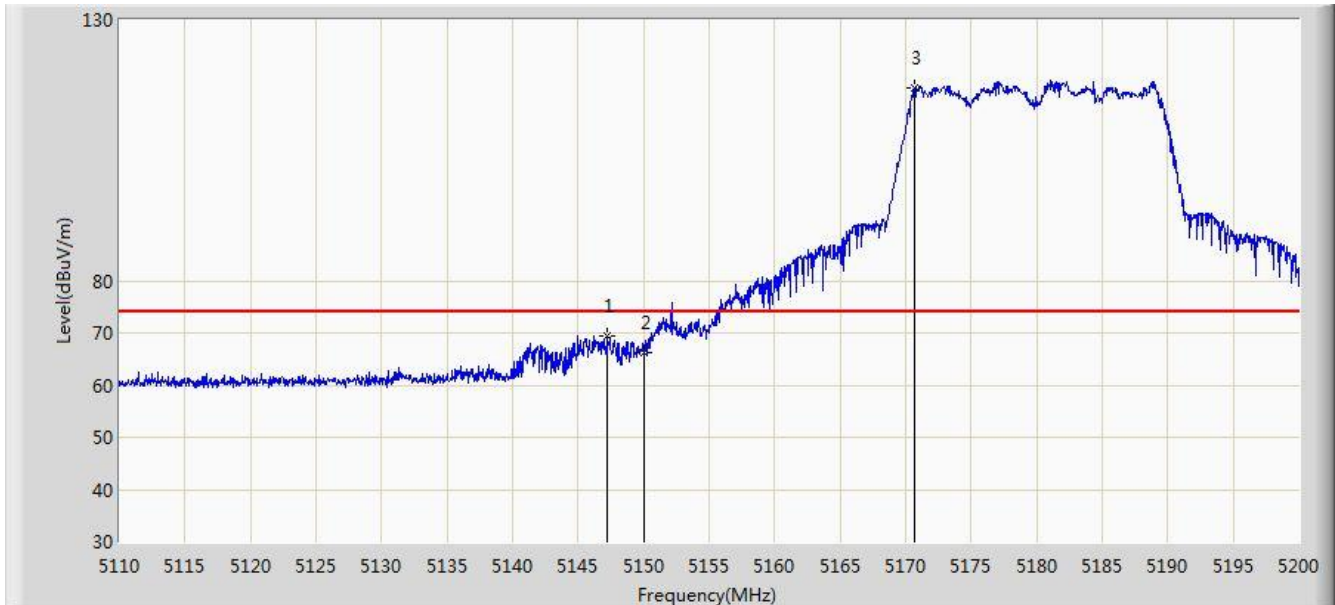


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.215        | 69.395                 | 65.219               | -4.605          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 66.326                 | 62.157               | -7.674          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5170.705        | 116.881                | 112.779              | N/A             | N/A            | 4.102       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 03:49 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

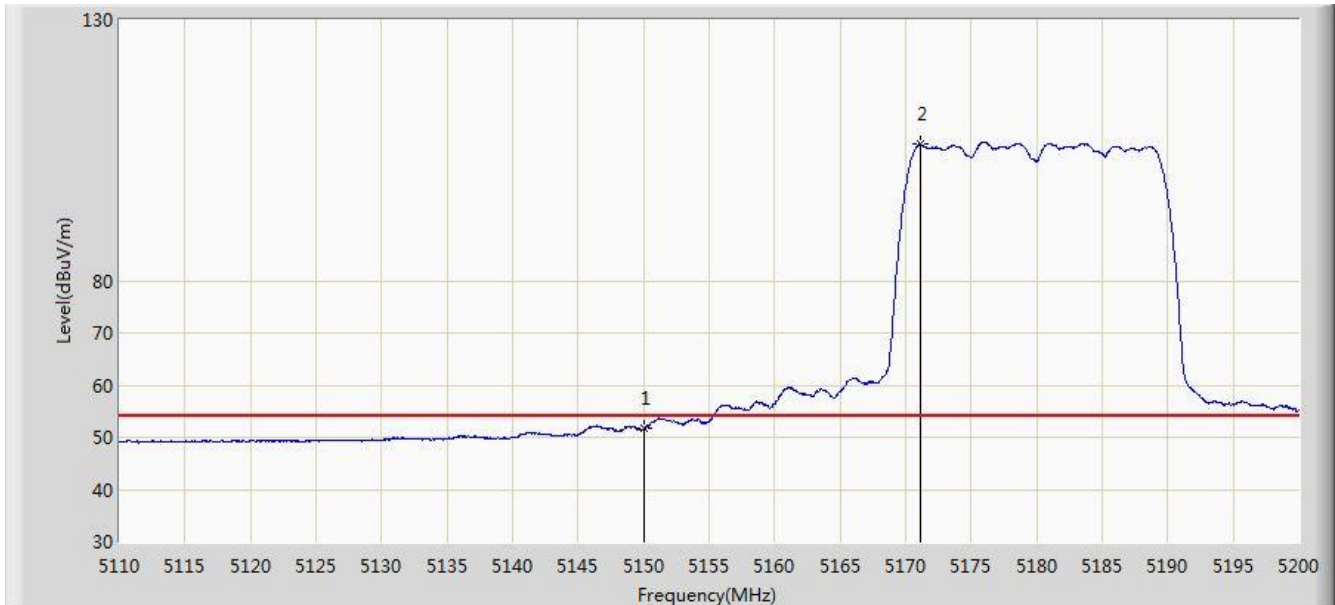


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 51.622                 | 47.453               | -2.378          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5171.110        | 106.152                | 102.052              | N/A             | N/A            | 4.101       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                          |                          |
|--------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                | Time: 2018/06/27 - 04:19 |
| Limit: FCC_Part15.407_RE(3m)                                             | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                              | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                        | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5745Hz Ant 0 + 1 + 2 + 3 |                          |

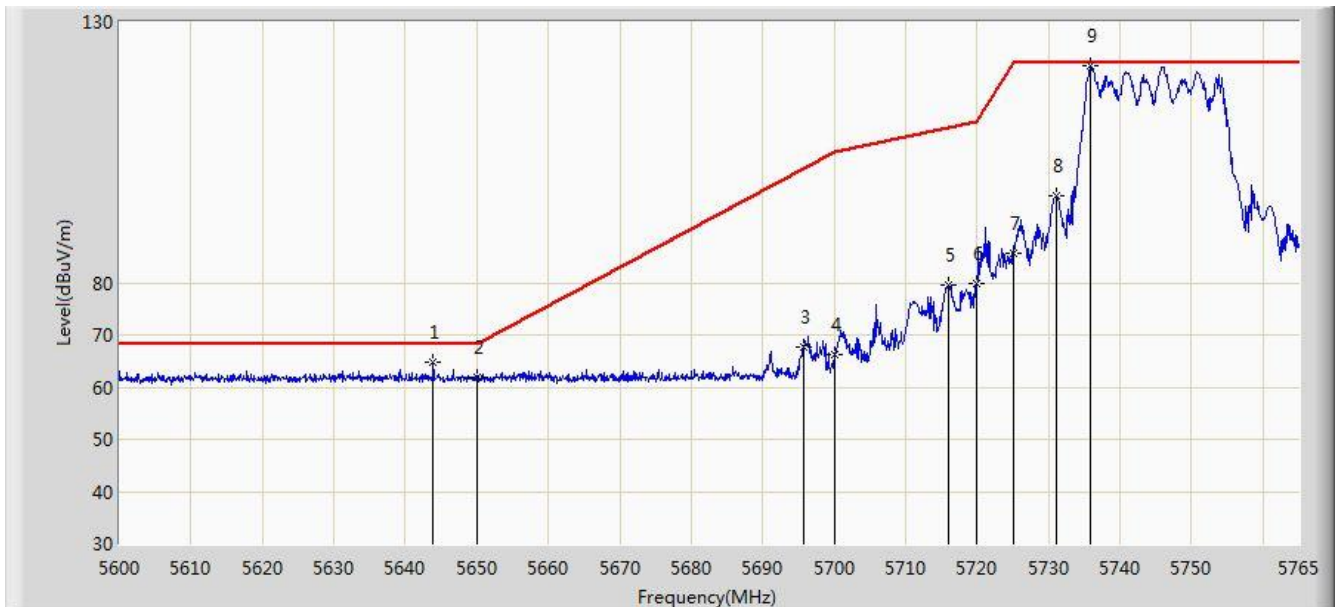


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5643.890        | 64.907                 | 60.256               | -3.293          | 68.200         | 4.651       | PK   |
| 2  |      |      | 5650.000        | 61.861                 | 57.190               | -6.339          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5695.700        | 67.767                 | 62.912               | -34.263         | 102.031        | 4.855       | PK   |
| 4  |      |      | 5700.000        | 66.178                 | 61.300               | -39.022         | 105.200        | 4.878       | PK   |
| 5  |      |      | 5715.913        | 79.579                 | 74.608               | -30.079         | 109.657        | 4.970       | PK   |
| 6  |      |      | 5720.000        | 79.819                 | 74.822               | -30.981         | 110.800        | 4.997       | PK   |
| 7  |      |      | 5725.000        | 85.642                 | 80.613               | -36.558         | 122.200        | 5.029       | PK   |
| 8  |      |      | 5731.092        | 96.617                 | 91.549               | -25.583         | 122.200        | 5.068       | PK   |
| 9  |      | *    | 5735.877        | 121.479                | 116.381              | N/A             | N/A            | 5.098       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                          |                          |
|--------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                | Time: 2018/06/27 - 04:22 |
| Limit: FCC_Part15.407_RE(3m)                                             | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                              | Polarity: Vertical       |
| EUT: ACCESS POINT                                                        | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5745Hz Ant 0 + 1 + 2 + 3 |                          |

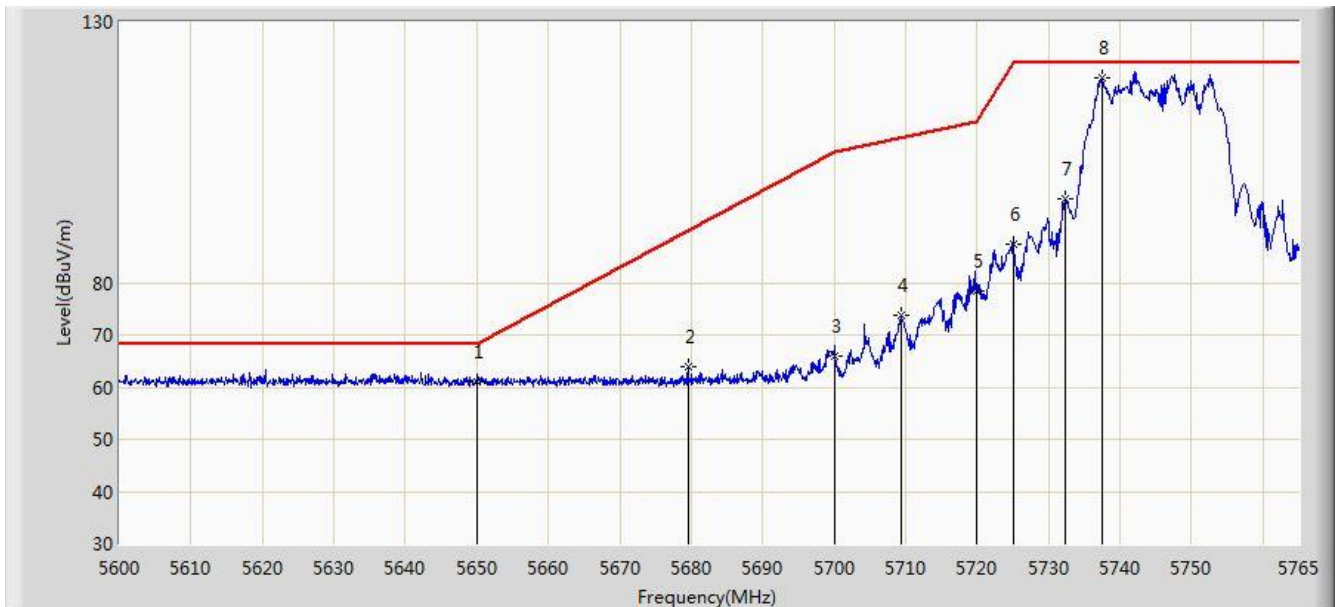


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5650.000        | 61.048                 | 56.377               | -7.152          | 68.200         | 4.671       | PK   |
| 2  |      |      | 5679.530        | 63.905                 | 59.120               | -26.186         | 90.092         | 4.785       | PK   |
| 3  |      |      | 5700.000        | 65.867                 | 60.989               | -39.333         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5709.395        | 73.821                 | 68.892               | -34.012         | 107.833        | 4.929       | PK   |
| 5  |      |      | 5720.000        | 78.393                 | 73.396               | -32.407         | 110.800        | 4.997       | PK   |
| 6  |      |      | 5725.000        | 87.525                 | 82.496               | -34.675         | 122.200        | 5.029       | PK   |
| 7  |      |      | 5732.248        | 96.109                 | 91.034               | -26.091         | 122.200        | 5.076       | PK   |
| 8  |      | *    | 5737.527        | 119.247                | 114.138              | N/A             | N/A            | 5.108       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 04:24 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 |                          |

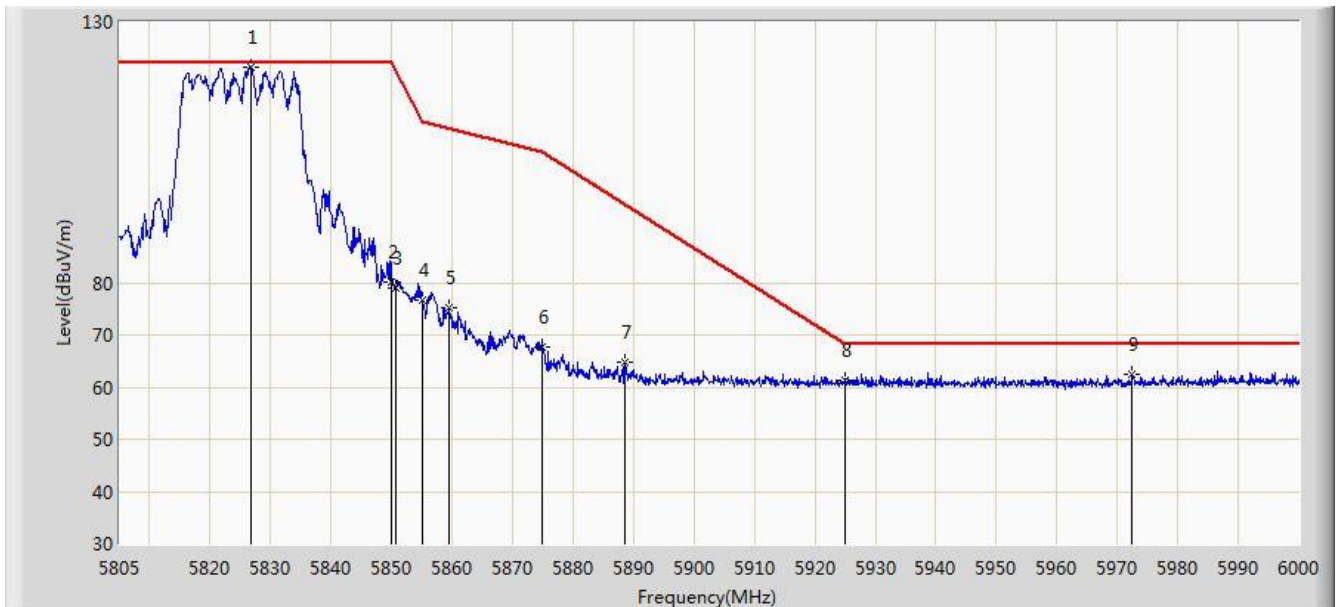


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5826.743        | 121.183                | 115.585              | N/A             | N/A            | 5.599       | PK   |
| 2  |      |      | 5850.000        | 80.114                 | 74.388               | -42.086         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5850.728        | 78.969                 | 73.240               | -41.571         | 120.540        | 5.729       | PK   |
| 4  |      |      | 5855.000        | 76.740                 | 70.994               | -34.060         | 110.800        | 5.746       | PK   |
| 5  |      |      | 5859.502        | 75.222                 | 69.457               | -34.316         | 109.538        | 5.765       | PK   |
| 6  |      |      | 5875.000        | 67.549                 | 61.729               | -37.651         | 105.200        | 5.820       | PK   |
| 7  |      |      | 5888.460        | 64.646                 | 58.780               | -30.563         | 95.209         | 5.866       | PK   |
| 8  |      |      | 5925.000        | 61.407                 | 55.441               | -6.793          | 68.200         | 5.967       | PK   |
| 9  |      |      | 5972.505        | 62.527                 | 56.462               | -5.673          | 68.200         | 6.065       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 04:26 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 |                          |

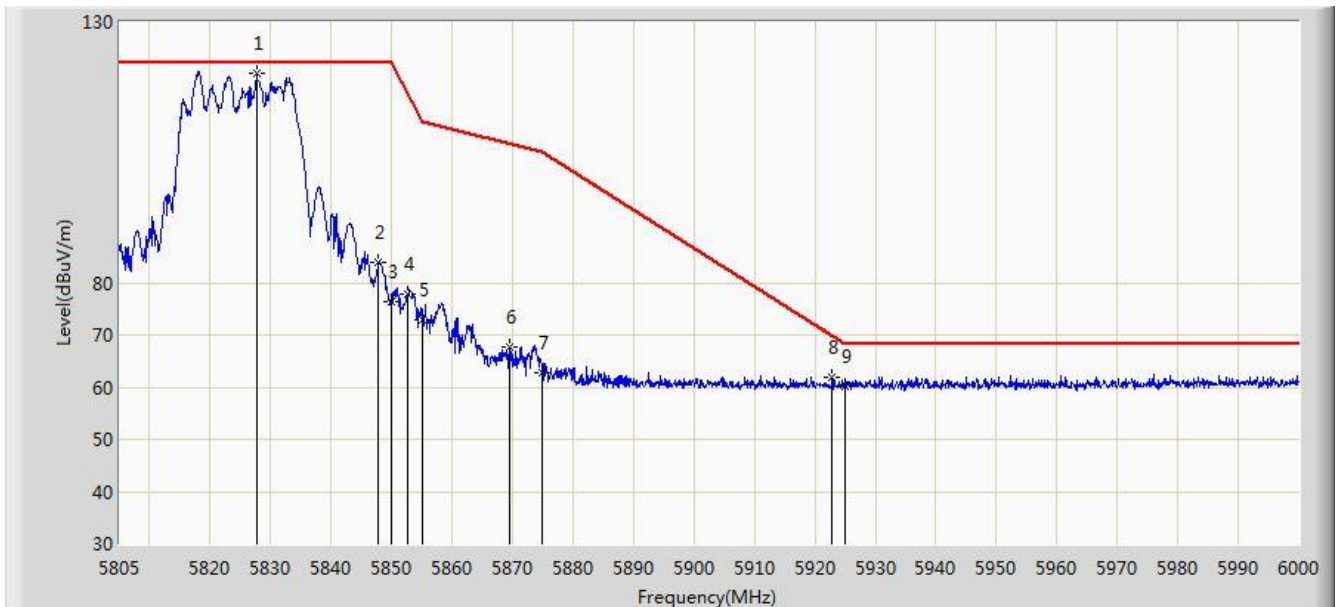


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5827.620        | 120.061                | 114.458              | N/A             | N/A            | 5.603       | PK   |
| 2  |      |      | 5847.803        | 84.042                 | 78.326               | -38.158         | 122.200        | 5.716       | PK   |
| 3  |      |      | 5850.000        | 76.421                 | 70.695               | -45.779         | 122.200        | 5.726       | PK   |
| 4  |      |      | 5852.580        | 77.789                 | 72.053               | -38.527         | 116.316        | 5.736       | PK   |
| 5  |      |      | 5855.000        | 72.874                 | 67.128               | -37.926         | 110.800        | 5.746       | PK   |
| 6  |      |      | 5869.545        | 67.673                 | 61.872               | -39.052         | 106.726        | 5.801       | PK   |
| 7  |      |      | 5875.000        | 62.891                 | 57.071               | -42.309         | 105.200        | 5.820       | PK   |
| 8  |      |      | 5922.877        | 61.862                 | 55.901               | -7.902          | 69.765         | 5.962       | PK   |
| 9  |      |      | 5925.000        | 60.181                 | 54.215               | -8.019          | 68.200         | 5.967       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 06:20 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

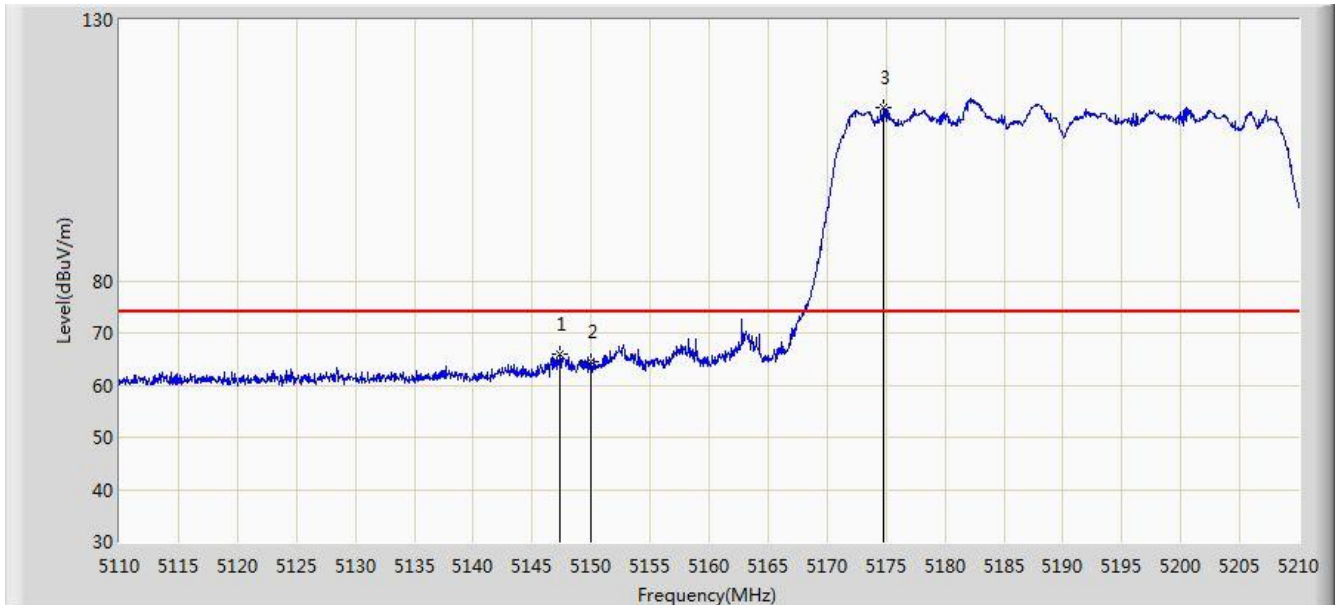


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.400        | 65.965                 | 61.789               | -8.035          | 74.000         | 4.175       | PK   |
| 2  |      |      | 5150.000        | 64.583                 | 60.414               | -9.417          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5174.750        | 113.086                | 108.999              | N/A             | N/A            | 4.088       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 06:21 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

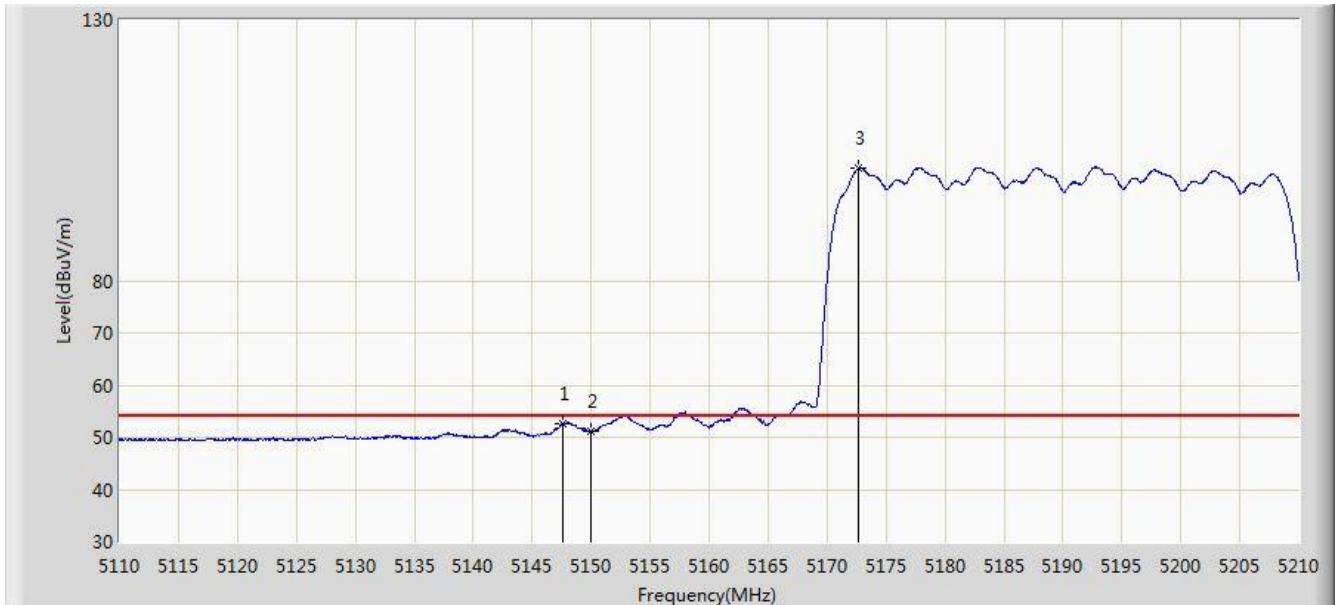


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.600        | 52.533                 | 48.357               | -1.467          | 54.000         | 4.176       | AV   |
| 2  |      |      | 5150.000        | 51.164                 | 46.995               | -2.836          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5172.600        | 101.467                | 97.372               | N/A             | N/A            | 4.095       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 06:17 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

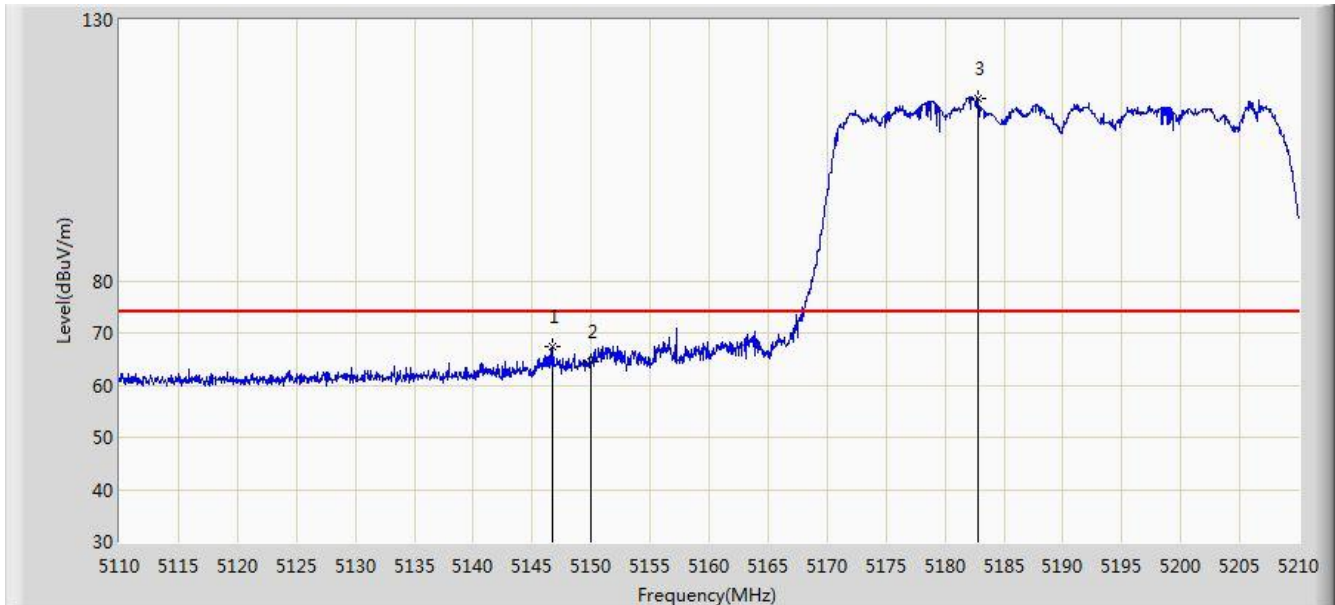


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5146.700        | 67.443                 | 63.267               | -6.557          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 64.598                 | 60.429               | -9.402          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5182.750        | 115.052                | 110.993              | N/A             | N/A            | 4.059       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 06:19 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

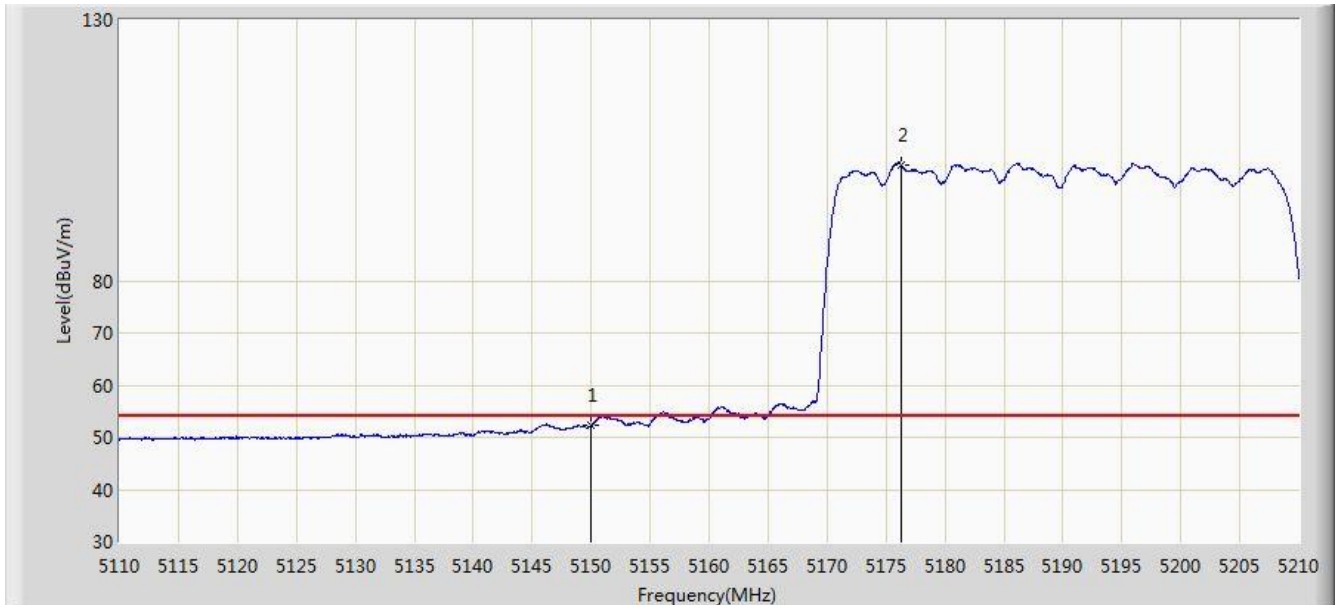


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.357                 | 48.188               | -1.643          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5176.350        | 102.207                | 98.125               | N/A             | N/A            | 4.081       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 07:02 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 |                          |

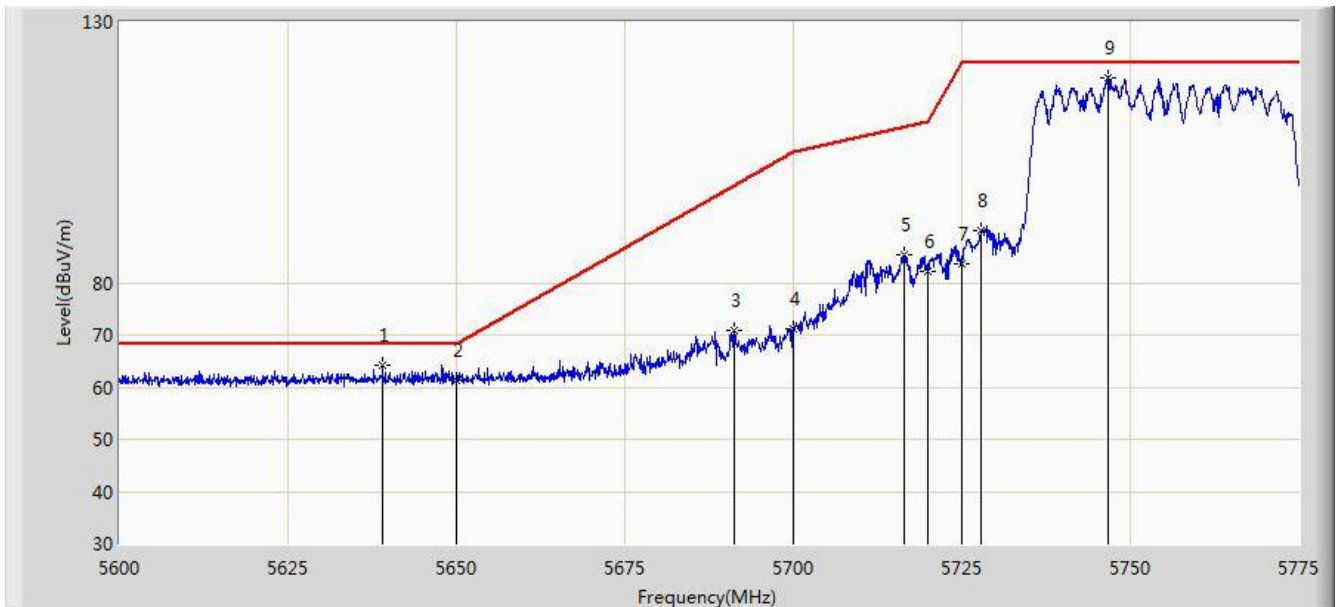


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5639.025        | 64.173                 | 59.538               | -4.027          | 68.200         | 4.635       | PK   |
| 2  |      |      | 5650.000        | 61.385                 | 56.714               | -6.815          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5691.175        | 70.918                 | 66.086               | -27.775         | 98.693         | 4.833       | PK   |
| 4  |      |      | 5700.000        | 71.115                 | 66.237               | -34.085         | 105.200        | 4.878       | PK   |
| 5  |      |      | 5716.462        | 85.437                 | 80.463               | -24.374         | 109.811        | 4.975       | PK   |
| 6  |      |      | 5720.000        | 82.194                 | 77.197               | -28.606         | 110.800        | 4.997       | PK   |
| 7  |      |      | 5725.000        | 83.636                 | 78.607               | -38.564         | 122.200        | 5.029       | PK   |
| 8  |      |      | 5727.837        | 89.911                 | 84.864               | -32.289         | 122.200        | 5.047       | PK   |
| 9  |      | *    | 5746.650        | 119.397                | 114.233              | N/A             | N/A            | 5.165       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 07:04 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 |                          |

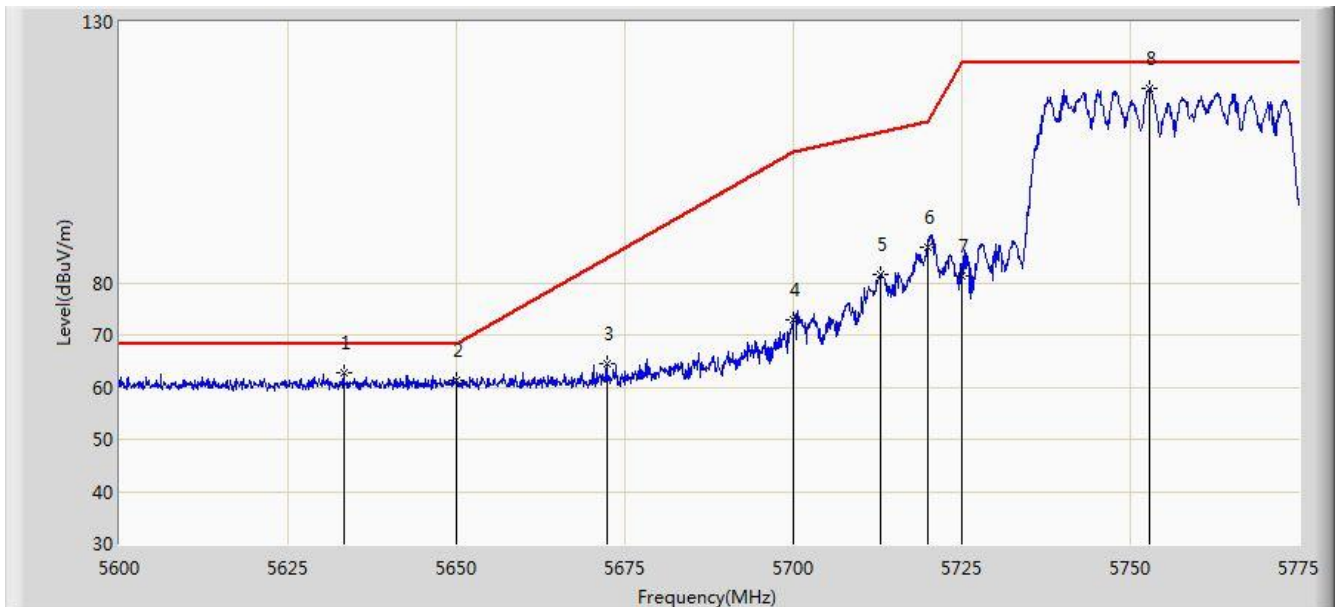


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5633.250        | 62.826                 | 58.208               | -5.374          | 68.200         | 4.618       | PK   |
| 2  |      |      | 5650.000        | 61.293                 | 56.622               | -6.907          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5672.275        | 64.571                 | 59.815               | -20.153         | 84.724         | 4.757       | PK   |
| 4  |      |      | 5700.000        | 72.803                 | 67.925               | -32.397         | 105.200        | 4.878       | PK   |
| 5  |      |      | 5712.875        | 81.570                 | 76.619               | -27.237         | 108.807        | 4.952       | PK   |
| 6  |      |      | 5720.000        | 86.854                 | 81.857               | -23.946         | 110.800        | 4.997       | PK   |
| 7  |      |      | 5725.000        | 81.437                 | 76.408               | -40.763         | 122.200        | 5.029       | PK   |
| 8  |      | *    | 5752.950        | 117.373                | 112.173              | N/A             | N/A            | 5.200       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 07:05 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 |                          |

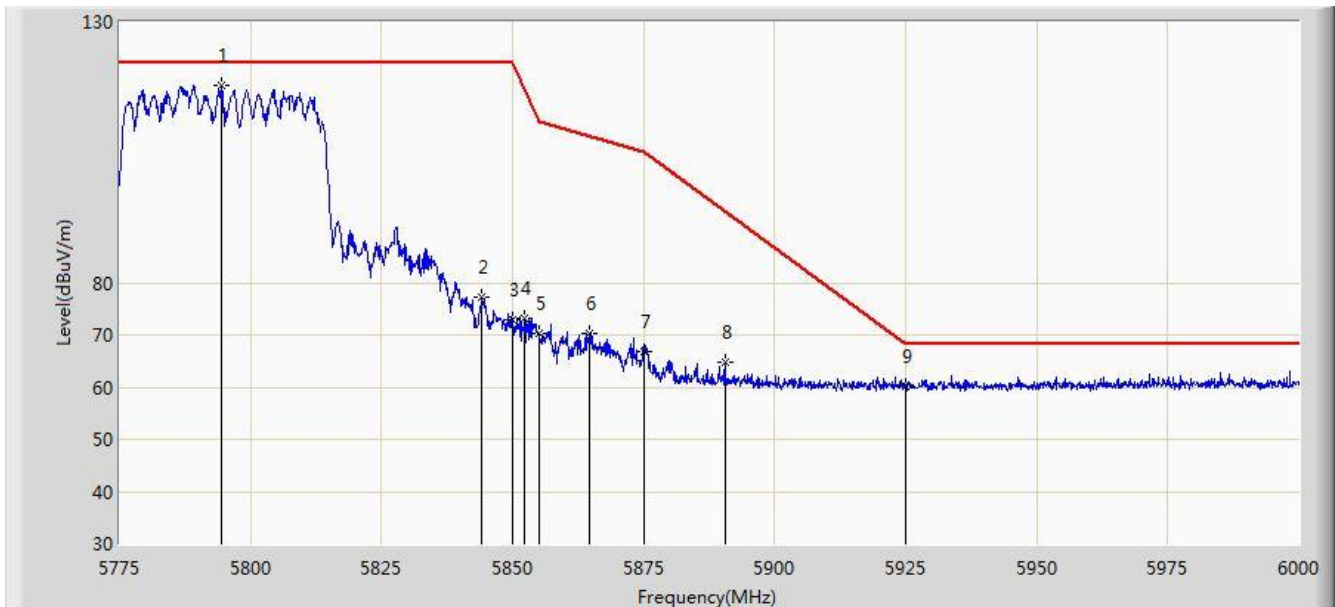


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5794.462        | 117.772                | 112.358              | N/A             | N/A            | 5.414       | PK   |
| 2  |      |      | 5844.187        | 77.153                 | 71.453               | -45.047         | 122.200        | 5.700       | PK   |
| 3  |      |      | 5850.000        | 72.768                 | 67.042               | -49.432         | 122.200        | 5.726       | PK   |
| 4  |      |      | 5852.288        | 73.110                 | 67.375               | -43.872         | 116.982        | 5.735       | PK   |
| 5  |      |      | 5855.000        | 70.397                 | 64.651               | -40.403         | 110.800        | 5.746       | PK   |
| 6  |      |      | 5864.775        | 70.265                 | 64.480               | -37.796         | 108.061        | 5.785       | PK   |
| 7  |      |      | 5875.000        | 66.809                 | 60.989               | -38.391         | 105.200        | 5.820       | PK   |
| 8  |      |      | 5890.538        | 64.658                 | 58.785               | -29.010         | 93.668         | 5.874       | PK   |
| 9  |      |      | 5925.000        | 60.048                 | 54.082               | -8.152          | 68.200         | 5.967       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 07:07 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 |                          |

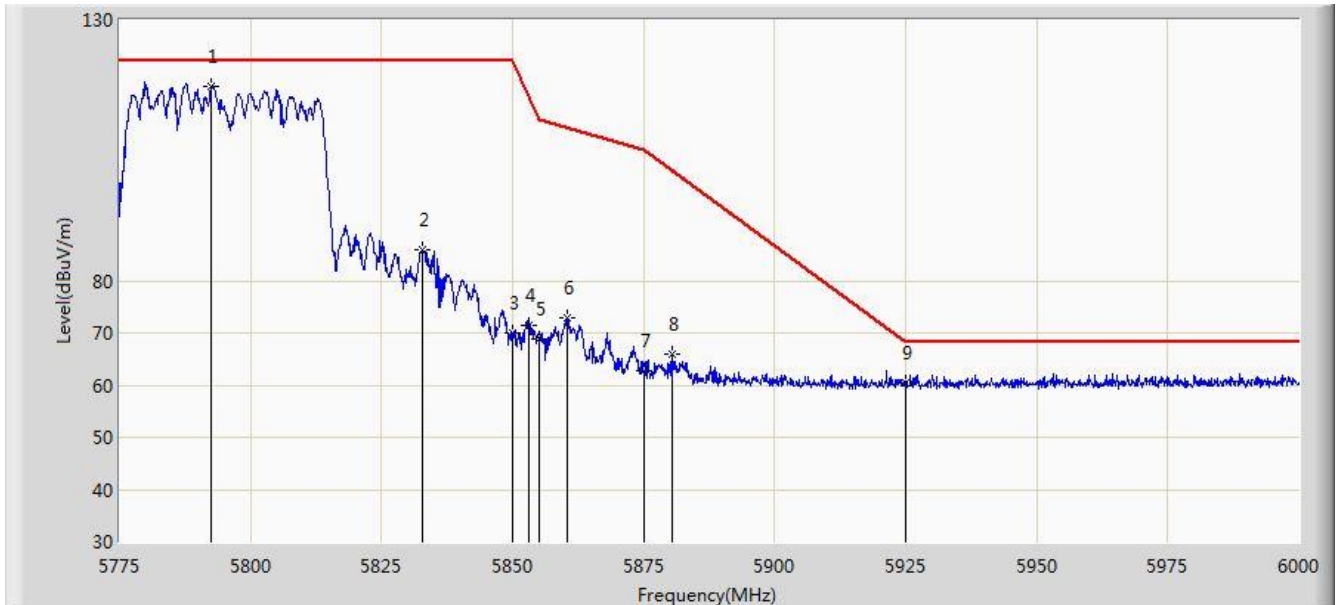


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5792.550        | 117.298                | 111.893              | N/A             | N/A            | 5.404       | PK   |
| 2  |      |      | 5832.937        | 85.831                 | 80.197               | -36.369         | 122.200        | 5.635       | PK   |
| 3  |      |      | 5850.000        | 69.875                 | 64.149               | -52.325         | 122.200        | 5.726       | PK   |
| 4  |      |      | 5852.962        | 71.501                 | 65.763               | -43.945         | 115.445        | 5.738       | PK   |
| 5  |      |      | 5855.000        | 68.909                 | 63.163               | -41.891         | 110.800        | 5.746       | PK   |
| 6  |      |      | 5860.500        | 72.809                 | 67.040               | -36.449         | 109.258        | 5.769       | PK   |
| 7  |      |      | 5875.000        | 62.635                 | 56.815               | -42.565         | 105.200        | 5.820       | PK   |
| 8  |      |      | 5880.413        | 65.975                 | 60.137               | -35.204         | 101.179        | 5.838       | PK   |
| 9  |      |      | 5925.000        | 60.458                 | 54.492               | -7.742          | 68.200         | 5.967       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 07:14 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

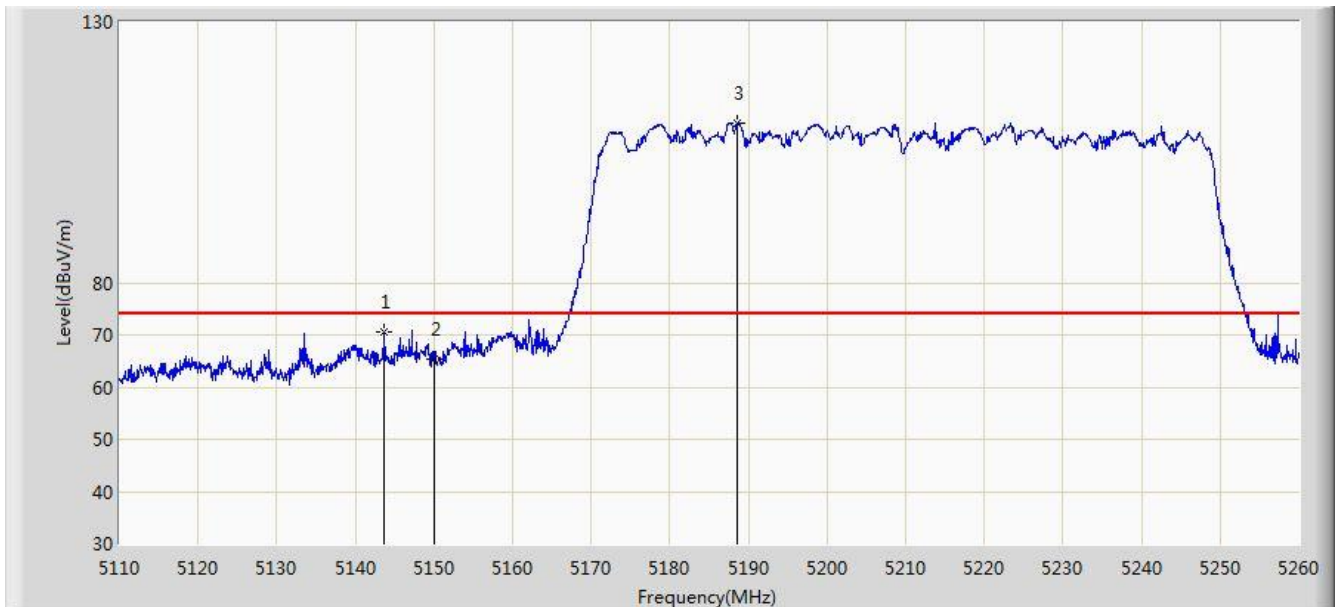


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5143.675        | 70.605                 | 64.021               | -3.395          | 74.000         | 6.584       | PK   |
| 2  |      |      | 5150.000        | 65.410                 | 58.848               | -8.590          | 74.000         | 6.562       | PK   |
| 3  |      | *    | 5188.600        | 110.637                | 104.247              | N/A             | N/A            | 6.390       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 07:15 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

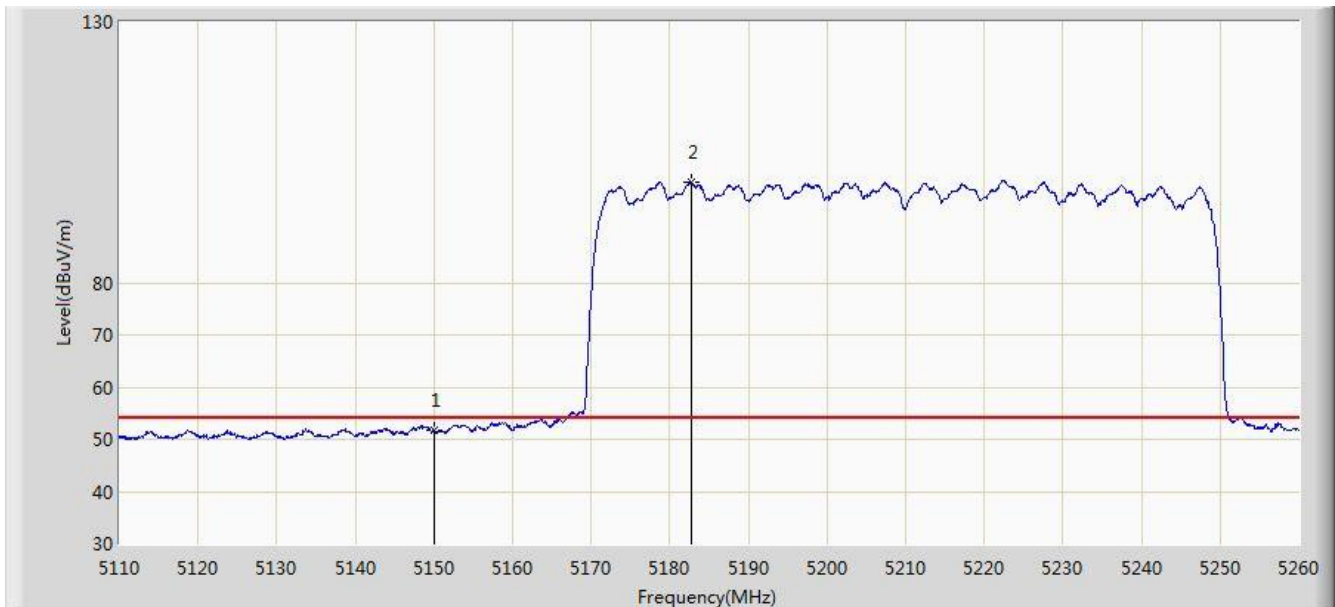


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 51.601                 | 45.039               | -2.399          | 54.000         | 6.562       | AV   |
| 2  |      | *    | 5182.675        | 99.202                 | 92.778               | N/A             | N/A            | 6.424       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 07:12 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

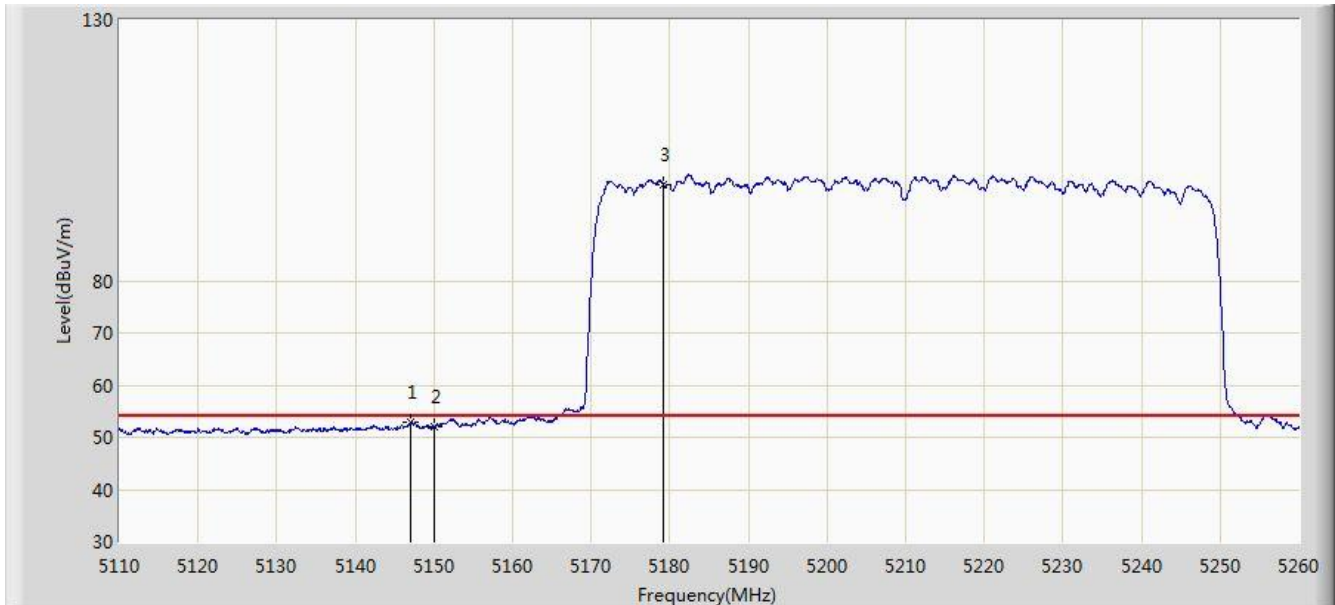


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5146.975        | 52.894                 | 48.718               | -1.106          | 54.000         | 4.176       | AV   |
| 2  |      |      | 5150.000        | 52.083                 | 47.914               | -1.917          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5179.225        | 98.346                 | 94.274               | N/A             | N/A            | 4.071       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 07:13 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

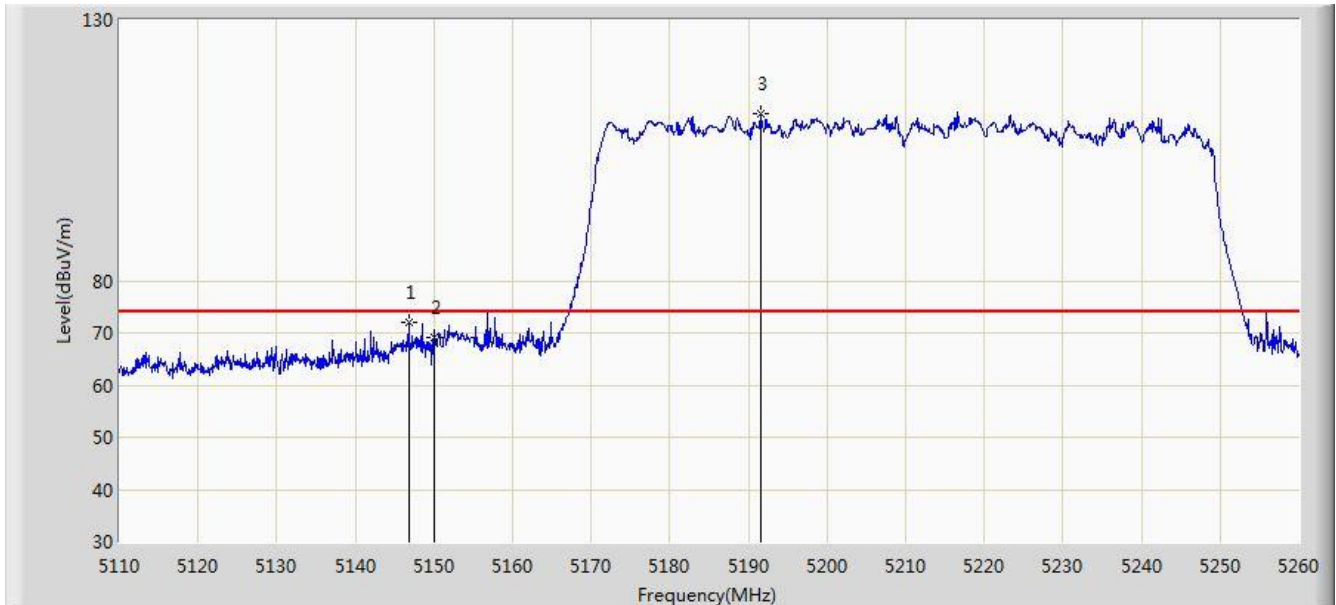


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5146.750        | 71.917                 | 67.741               | -2.083          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 69.021                 | 64.852               | -4.979          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5191.525        | 111.962                | 107.934              | N/A             | N/A            | 4.028       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 07:53 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 |                          |

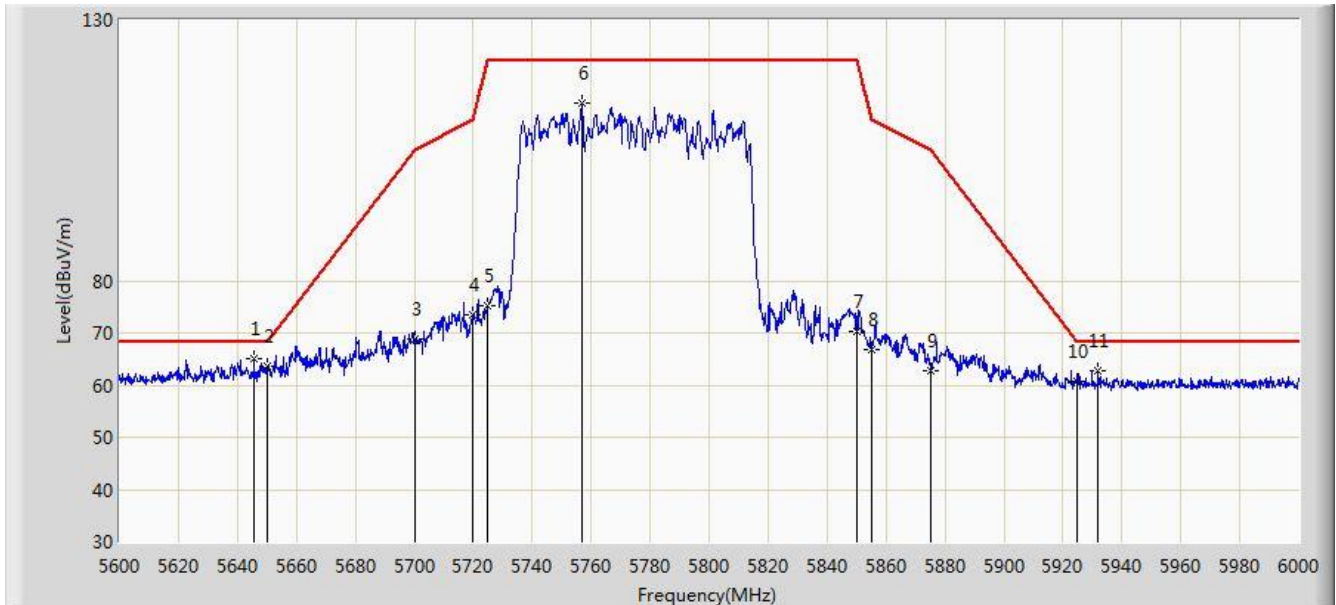


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5645.600        | 65.101                 | 60.445               | -3.099          | 68.200         | 4.657       | PK   |
| 2  |      |      | 5650.000        | 63.765                 | 59.094               | -4.435          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 68.748                 | 63.870               | -36.452         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 73.405                 | 68.408               | -37.395         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 75.355                 | 70.326               | -46.845         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5756.800        | 114.201                | 108.979              | N/A             | N/A            | 5.222       | PK   |
| 7  |      |      | 5850.000        | 70.414                 | 64.688               | -51.786         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 66.742                 | 60.996               | -44.058         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 62.833                 | 57.013               | -42.367         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 60.756                 | 54.790               | -7.444          | 68.200         | 5.967       | PK   |
| 11 |      |      | 5932.000        | 62.850                 | 56.866               | -5.350          | 68.200         | 5.984       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/27 - 07:54 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 |                          |

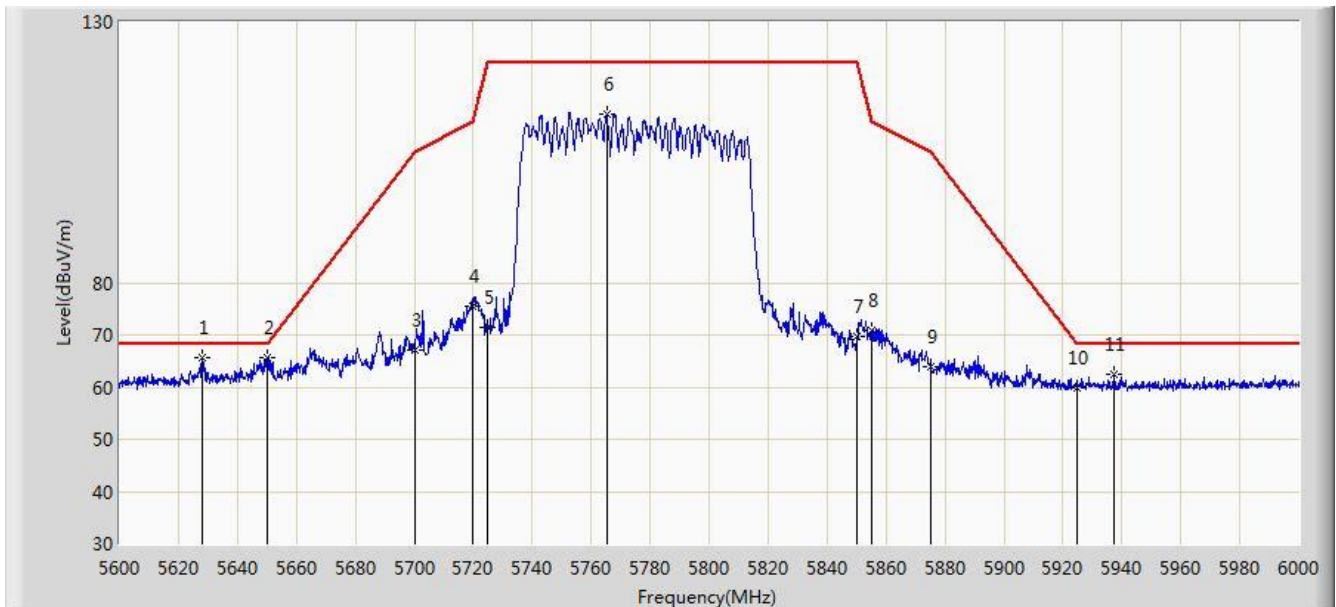


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5628.000        | 65.684                 | 61.081               | -2.516          | 68.200         | 4.604       | PK   |
| 2  |      |      | 5650.000        | 65.664                 | 60.993               | -2.536          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 66.980                 | 62.102               | -38.220         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 75.396                 | 70.399               | -35.404         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 71.319                 | 66.290               | -50.881         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5765.200        | 112.233                | 106.967              | N/A             | N/A            | 5.267       | PK   |
| 7  |      |      | 5850.000        | 69.764                 | 64.038               | -52.436         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 70.923                 | 65.177               | -39.877         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 63.837                 | 58.017               | -41.363         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 59.896                 | 53.930               | -8.304          | 68.200         | 5.967       | PK   |
| 11 |      |      | 5937.400        | 62.321                 | 56.324               | -5.879          | 68.200         | 5.997       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### For APIN0515:

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/20 - 01:02 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

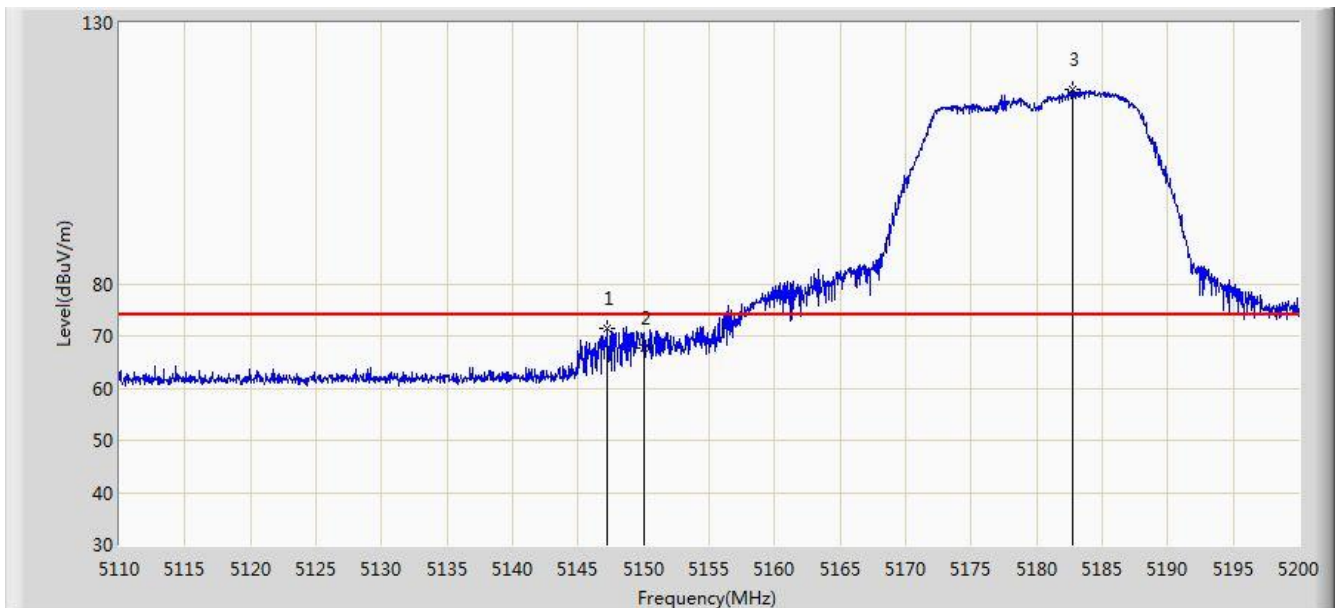


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.260        | 71.517                 | 67.341               | -2.483          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 67.743                 | 63.574               | -6.257          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5182.720        | 117.172                | 113.113              | N/A             | N/A            | 4.060       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/20 - 01:05 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

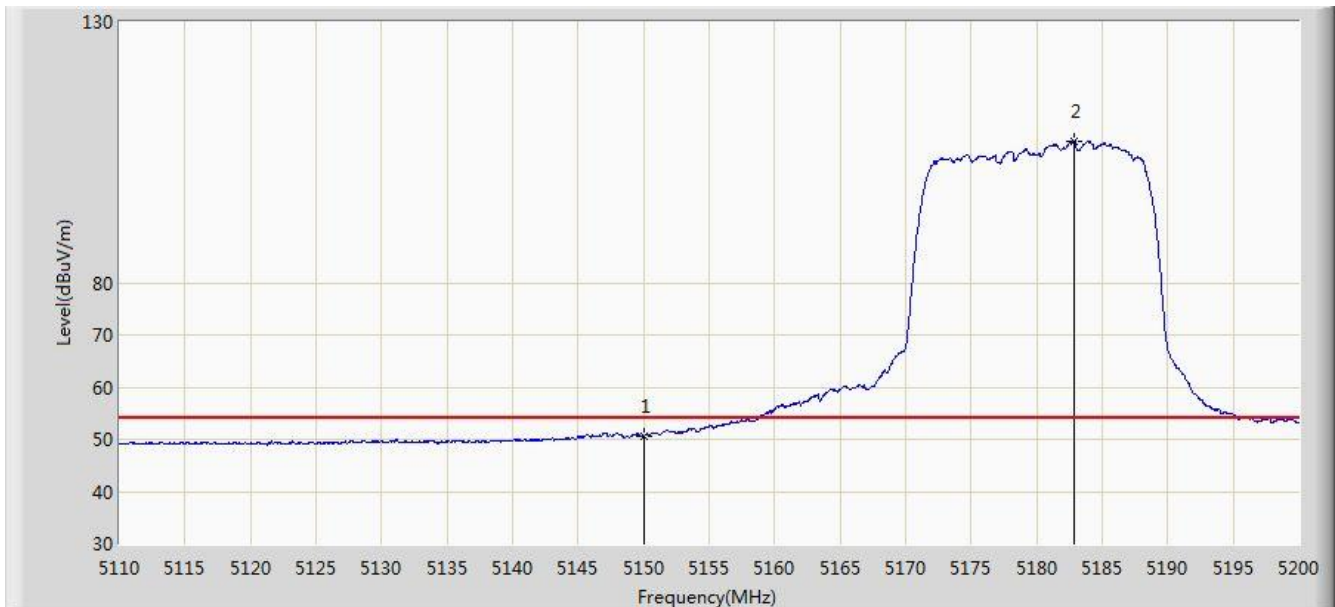


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 50.569                 | 46.400               | -3.431          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5182.855        | 107.206                | 103.147              | N/A             | N/A            | 4.059       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/20 - 00:57 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

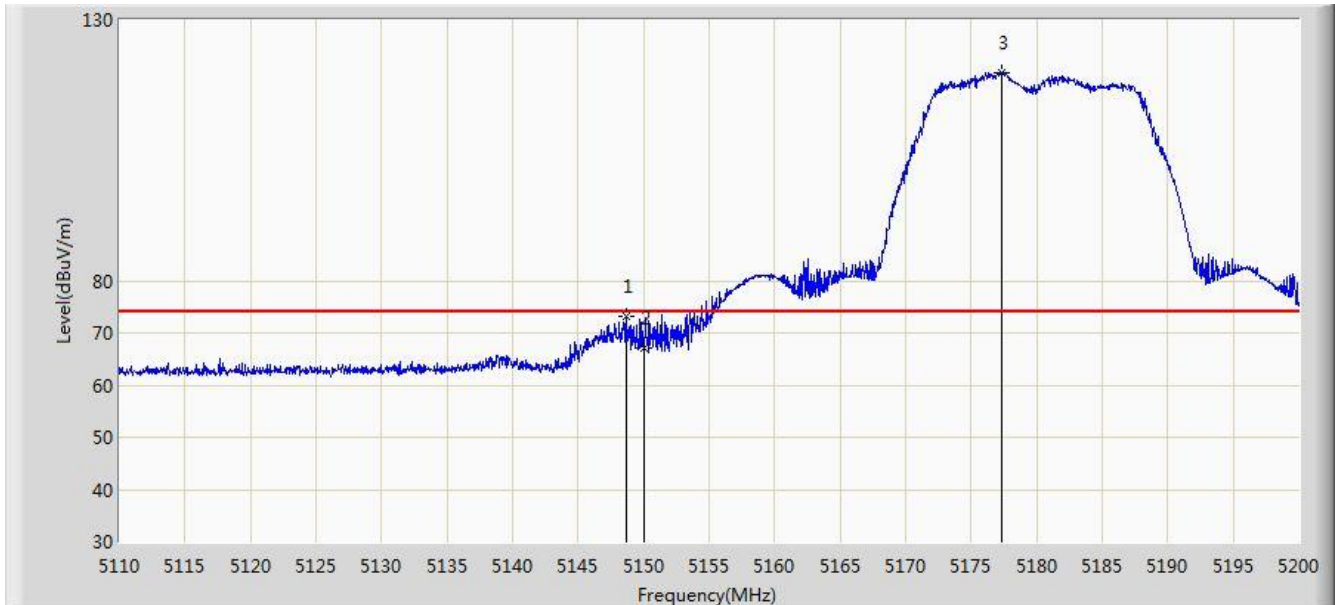


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.655        | 73.124                 | 68.950               | -0.876          | 74.000         | 4.174       | PK   |
| 2  |      |      | 5150.000        | 67.069                 | 62.900               | -6.931          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5177.275        | 119.908                | 115.829              | N/A             | N/A            | 4.078       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/20 - 01:01 |
| Limit: FCC_Part15.209_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

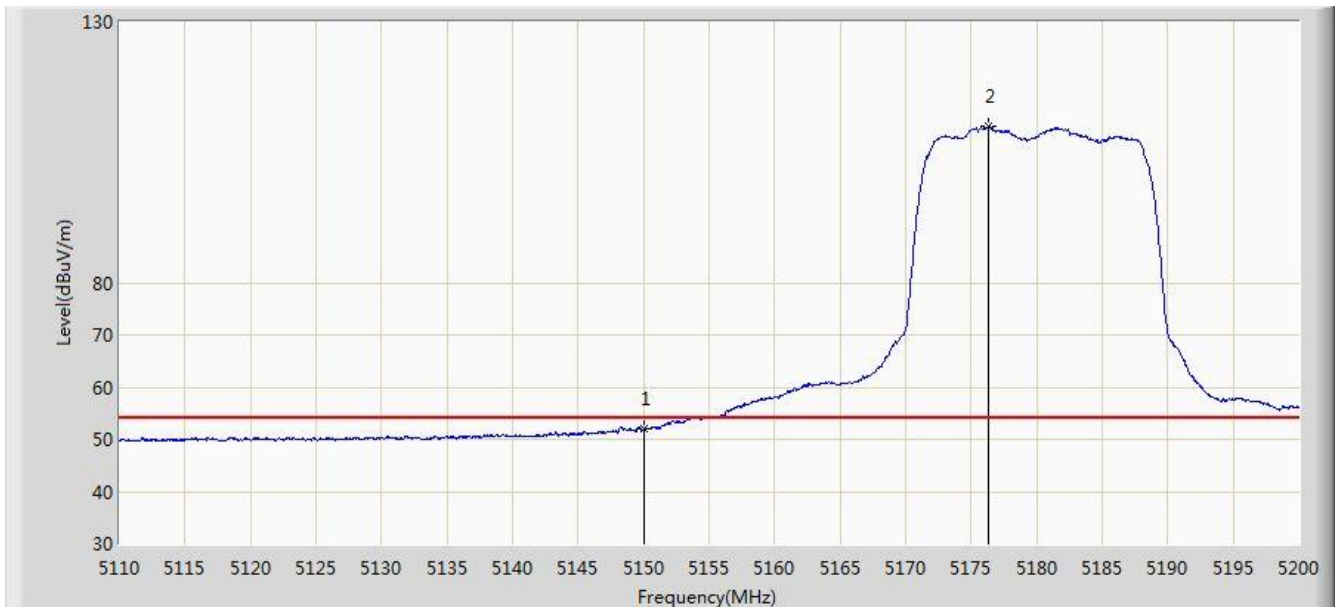


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 51.915                 | 47.746               | -2.085          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5176.330        | 109.945                | 105.863              | N/A             | N/A            | 4.081       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/20 - 02:14 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 + 1 + 2 + 3 |                          |

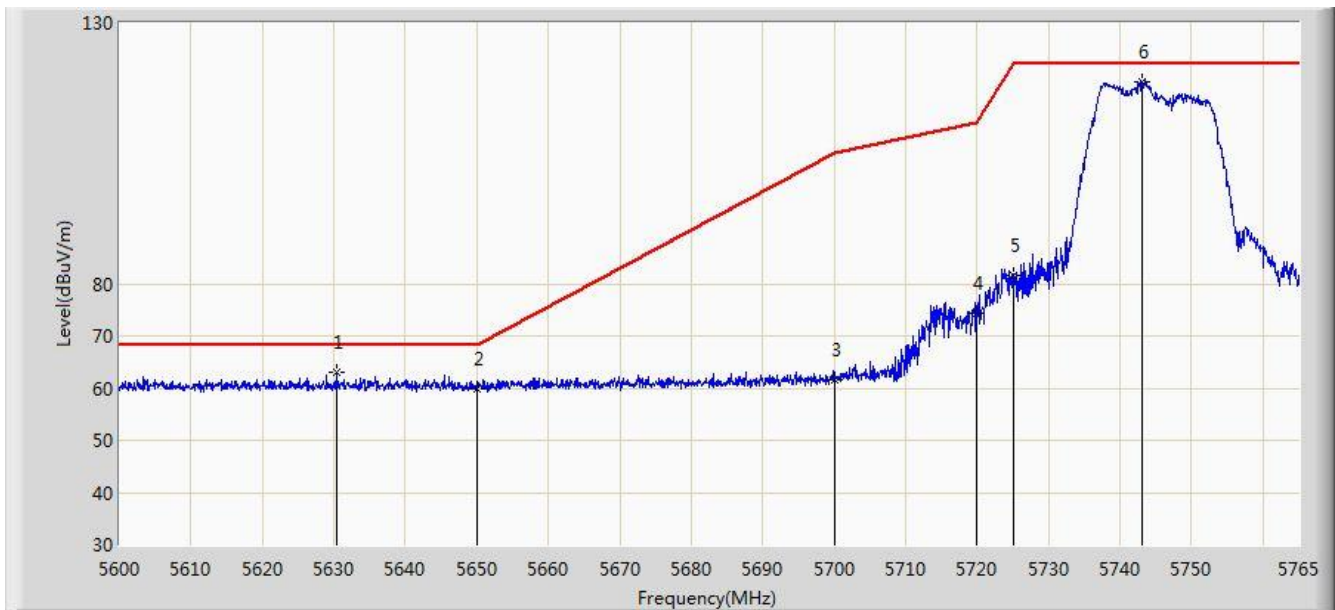


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5630.360        | 63.137                 | 58.527               | -5.063          | 68.200         | 4.610       | PK   |
| 2  |      |      | 5650.000        | 59.991                 | 55.320               | -8.209          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 61.599                 | 56.721               | -43.601         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 74.458                 | 69.461               | -36.342         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 81.631                 | 76.602               | -40.569         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5743.055        | 118.795                | 113.651              | N/A             | N/A            | 5.144       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/20 - 02:16 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5745MHz Ant 0 + 1 + 2 + 3 |                          |

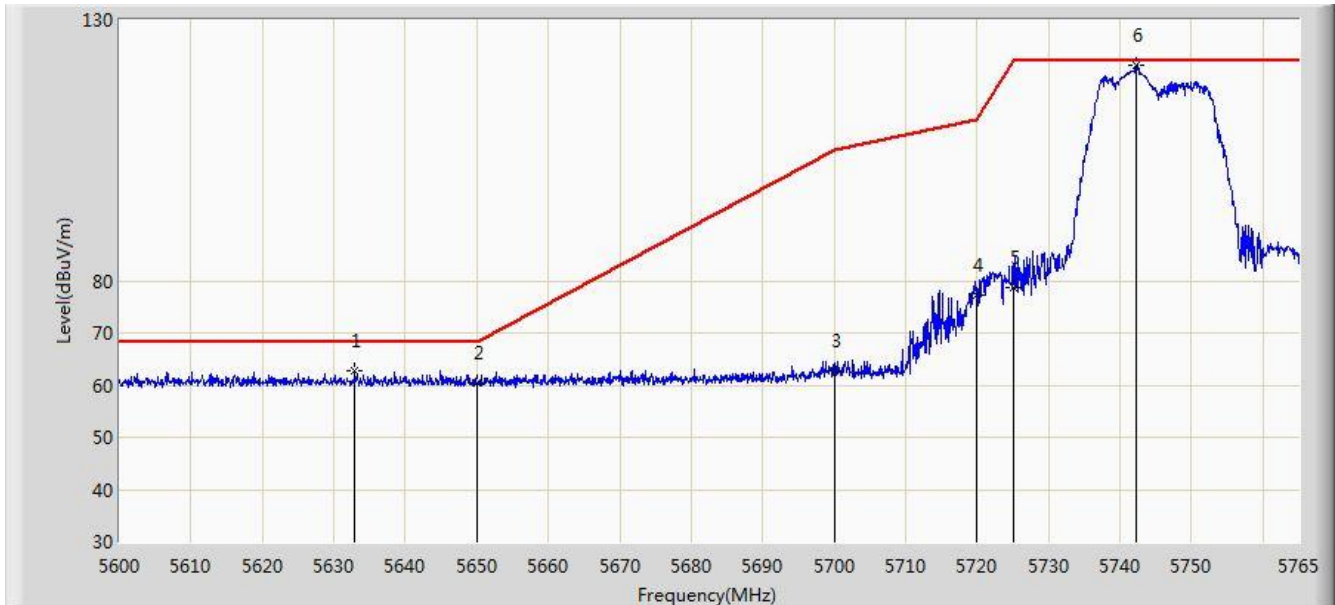


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5632.917        | 62.778                 | 58.161               | -5.422          | 68.200         | 4.618       | PK   |
| 2  |      |      | 5650.000        | 60.327                 | 55.656               | -7.873          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 62.614                 | 57.736               | -42.586         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 77.346                 | 72.349               | -33.454         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 78.592                 | 73.563               | -43.608         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5742.312        | 121.287                | 116.148              | N/A             | N/A            | 5.139       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/20 - 02:18 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0 + 1 + 2 + 3 |                          |

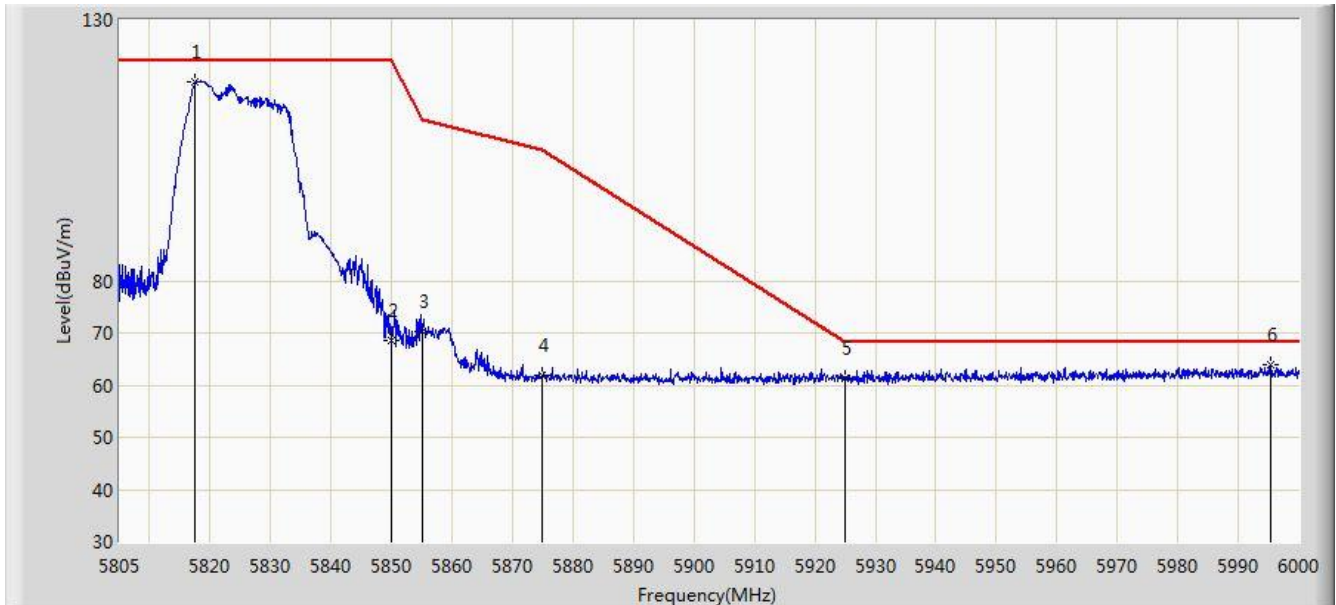


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5817.578        | 118.048                | 112.503              | N/A             | N/A            | 5.544       | PK   |
| 2  |      |      | 5850.000        | 68.419                 | 62.693               | -53.781         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 70.331                 | 64.585               | -40.469         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 61.852                 | 56.032               | -43.348         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 61.234                 | 55.268               | -6.966          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5995.320        | 63.949                 | 57.846               | -4.251          | 68.200         | 6.102       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                     |                          |
|---------------------------------------------------------------------|--------------------------|
| Site: AC1                                                           | Time: 2018/06/20 - 02:21 |
| Limit: FCC_Part15.407_RE(3m)                                        | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                         | Polarity: Vertical       |
| EUT: ACCESS POINT                                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11a at Channel 5825MHz Ant 0 + 1 + 2 + 3 |                          |

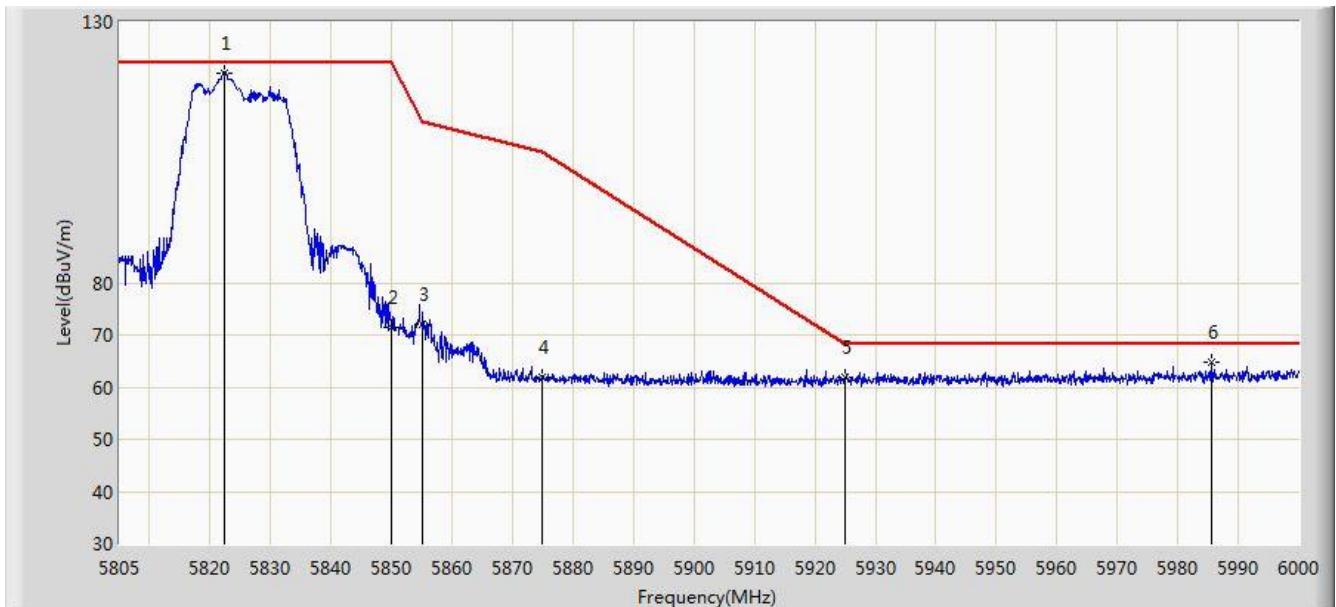


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5822.257        | 120.275                | 114.703              | N/A             | N/A            | 5.572       | PK   |
| 2  |      |      | 5850.000        | 71.329                 | 65.603               | -50.871         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 72.111                 | 66.365               | -38.689         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 61.860                 | 56.040               | -43.340         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 61.772                 | 55.806               | -6.428          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5985.667        | 64.812                 | 58.725               | -3.388          | 68.200         | 6.087       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 02:49 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

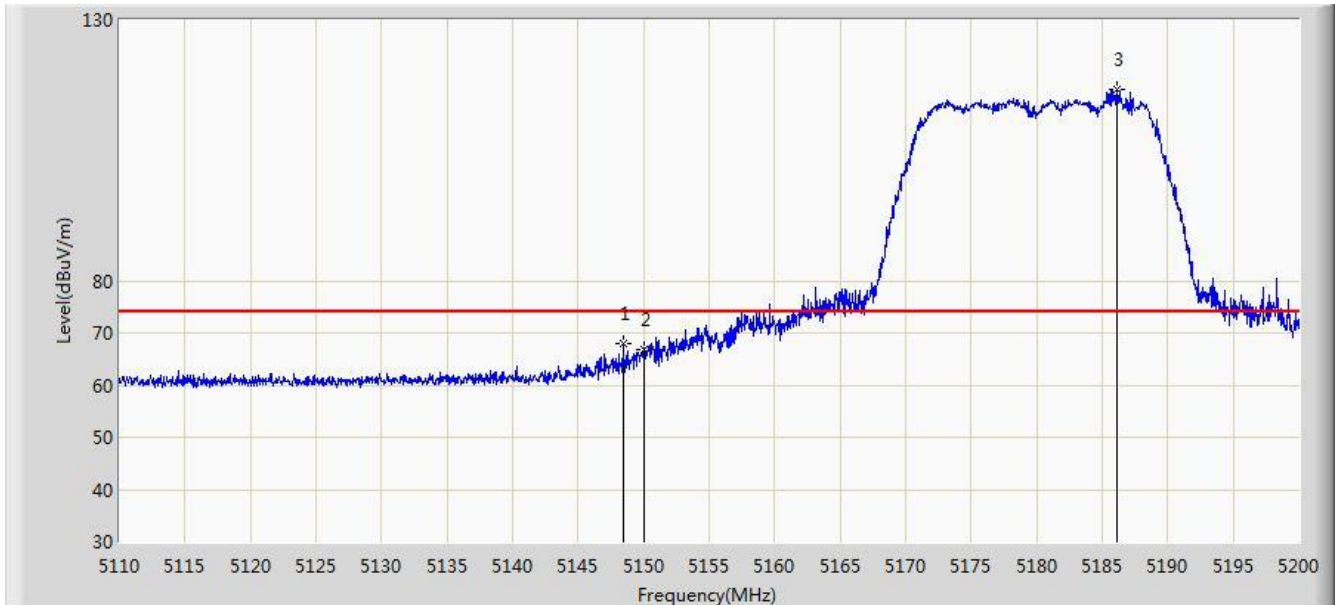


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.430        | 68.029                 | 63.855               | -5.971          | 74.000         | 4.174       | PK   |
| 2  |      |      | 5150.000        | 66.797                 | 62.628               | -7.203          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5186.140        | 116.629                | 112.582              | N/A             | N/A            | 4.047       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 02:51 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

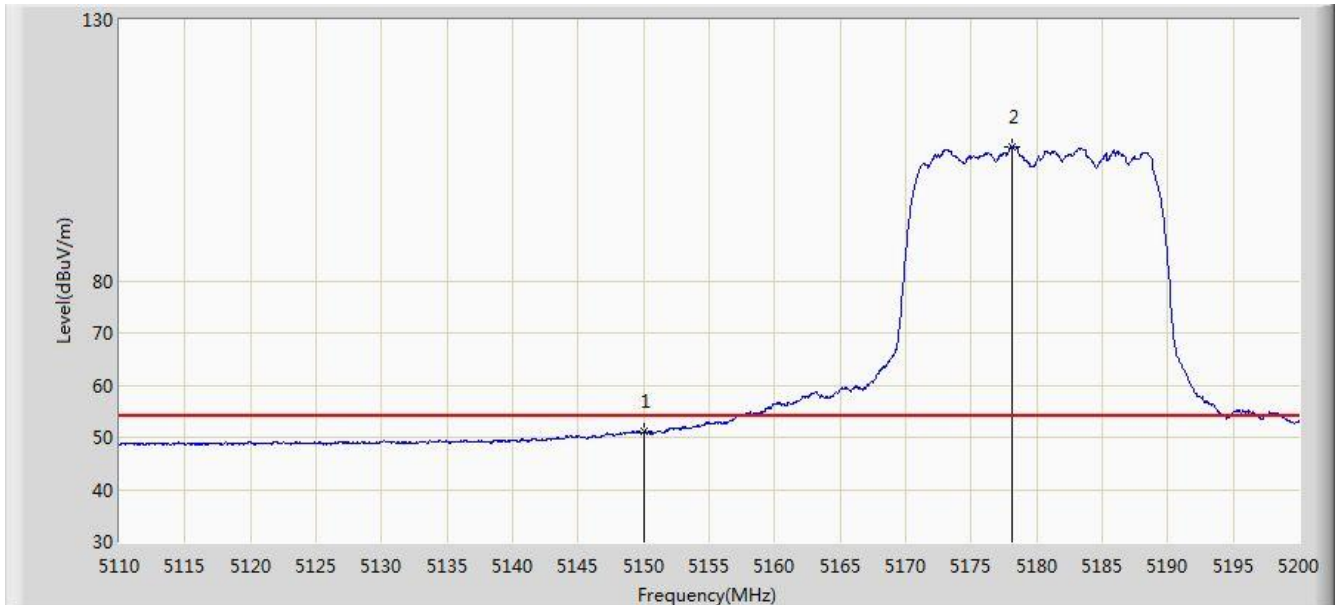


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 51.142                 | 46.973               | -2.858          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5178.085        | 105.630                | 101.554              | N/A             | N/A            | 4.076       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 02:47 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

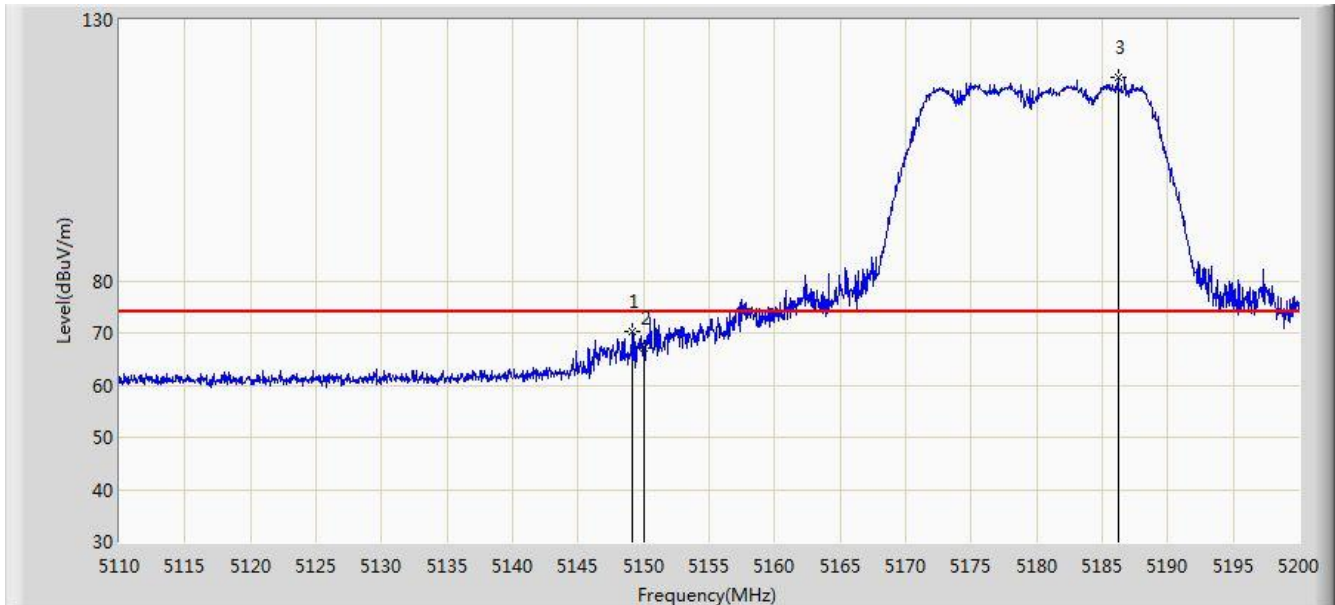


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.150        | 70.189                 | 66.017               | -3.811          | 74.000         | 4.172       | PK   |
| 2  |      |      | 5150.000        | 67.187                 | 63.018               | -6.813          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5186.185        | 118.917                | 114.870              | N/A             | N/A            | 4.047       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 02:46 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

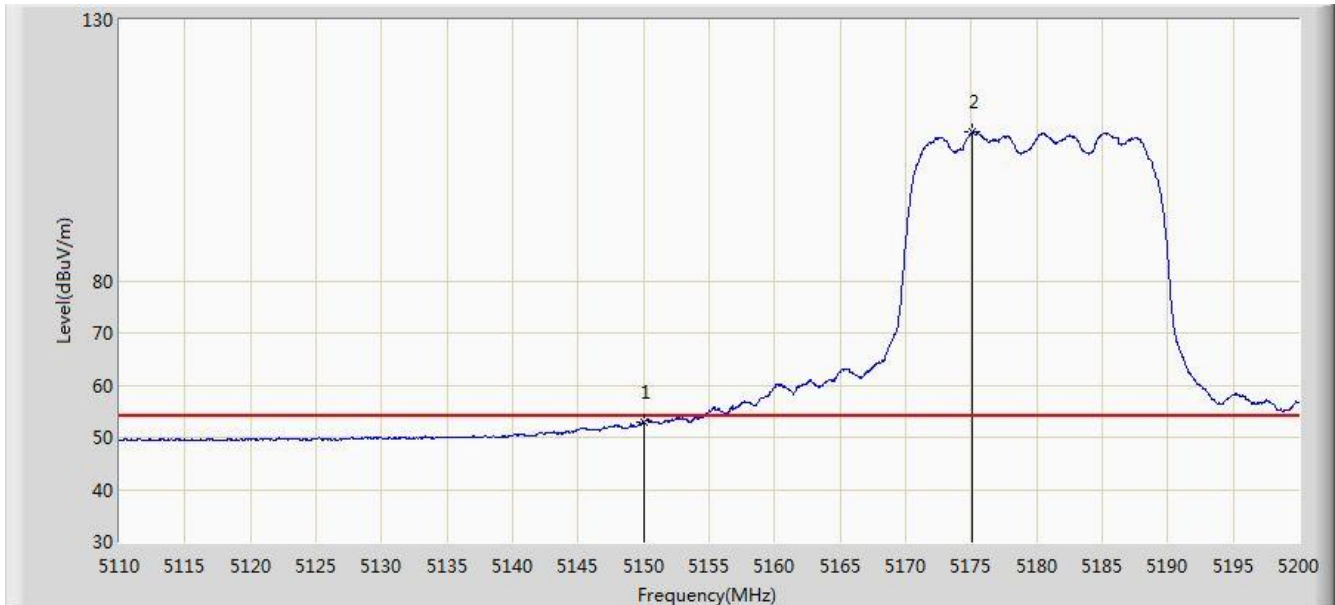


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.987                 | 48.818               | -1.013          | 54.000         | 4.170       | AV   |
| 2  | X    | *    | 5175.115        | 108.478                | 104.392              | N/A             | N/A            | 4.086       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 04:06 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 |                          |

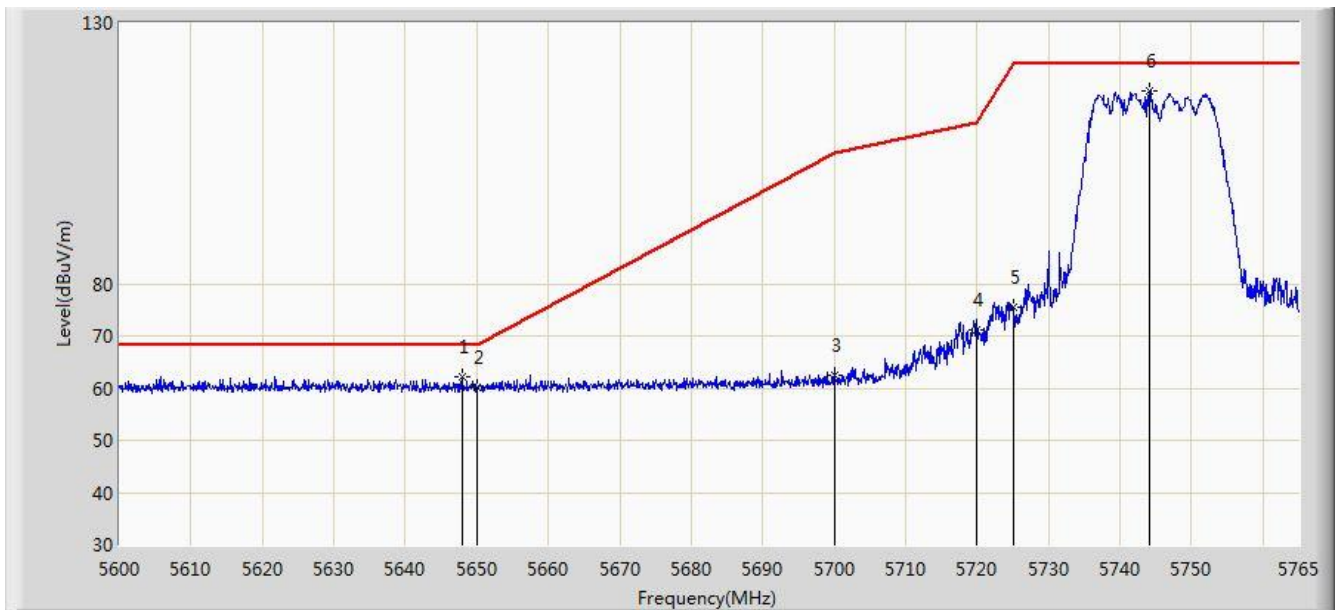


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5647.933        | 62.218                 | 57.554               | -5.982          | 68.200         | 4.665       | PK   |
| 2  |      |      | 5650.000        | 60.050                 | 55.379               | -8.150          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 62.320                 | 57.442               | -42.880         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 71.107                 | 66.110               | -39.693         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 75.592                 | 70.563               | -46.608         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5744.045        | 116.877                | 111.727              | N/A             | N/A            | 5.149       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 04:04 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 |                          |

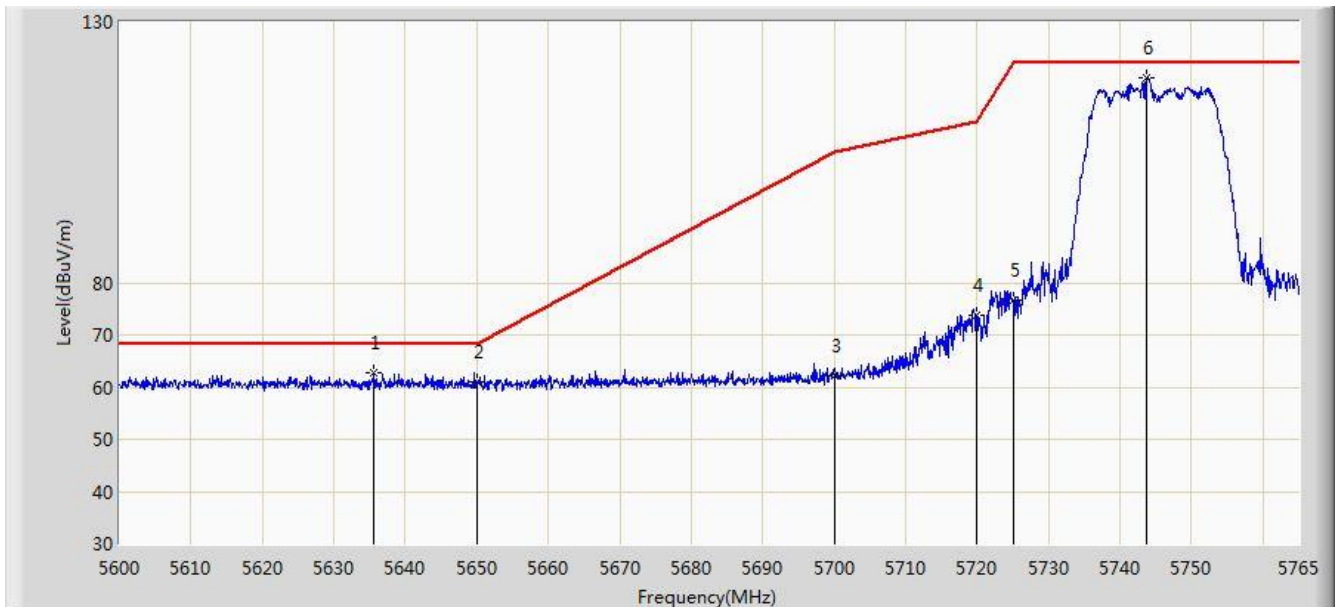


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5635.558        | 62.719                 | 58.094               | -5.481          | 68.200         | 4.625       | PK   |
| 2  |      |      | 5650.000        | 60.947                 | 56.276               | -7.253          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 62.130                 | 57.252               | -43.070         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 73.638                 | 68.641               | -37.162         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 76.557                 | 71.528               | -45.643         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5743.797        | 119.277                | 114.129              | N/A             | N/A            | 5.148       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 04:08 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 |                          |

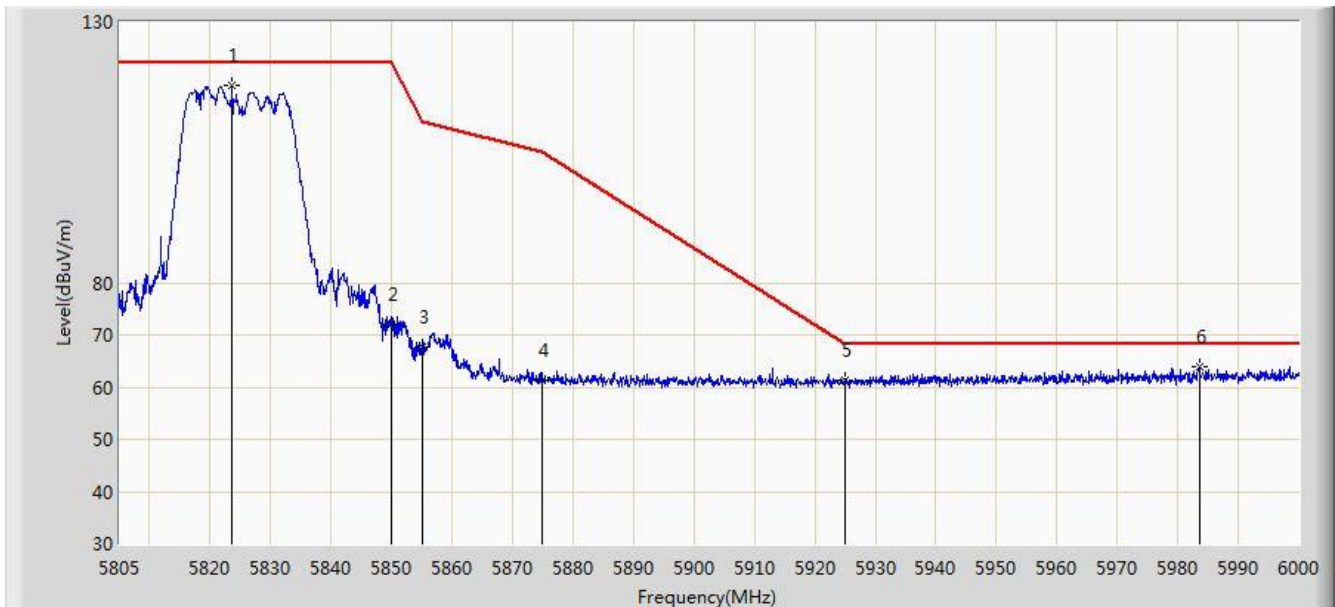


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5823.623        | 117.740                | 112.160              | N/A             | N/A            | 5.580       | PK   |
| 2  |      |      | 5850.000        | 72.012                 | 66.286               | -50.188         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 67.772                 | 62.026               | -43.028         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 61.237                 | 55.417               | -43.963         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 61.336                 | 55.370               | -6.864          | 68.200         | 5.967       | PK   |
| 6  |      | *    | 5983.620        | 63.869                 | 57.785               | -4.331          | 68.200         | 6.083       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 04:10 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 |                          |

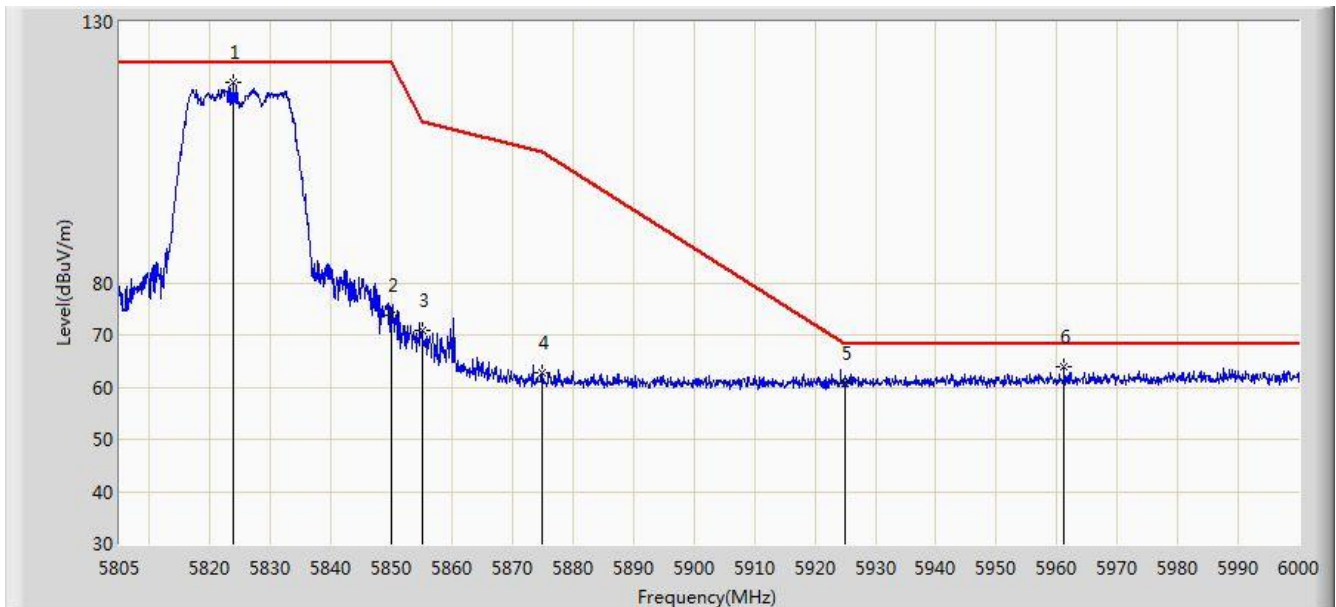


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5823.720        | 118.324                | 112.744              | N/A             | N/A            | 5.580       | PK   |
| 2  |      |      | 5850.000        | 73.851                 | 68.125               | -48.349         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 70.809                 | 65.063               | -39.991         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 62.663                 | 56.843               | -42.537         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 60.605                 | 54.639               | -7.595          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5961.195        | 63.904                 | 57.858               | -4.296          | 68.200         | 6.046       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 04:25 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

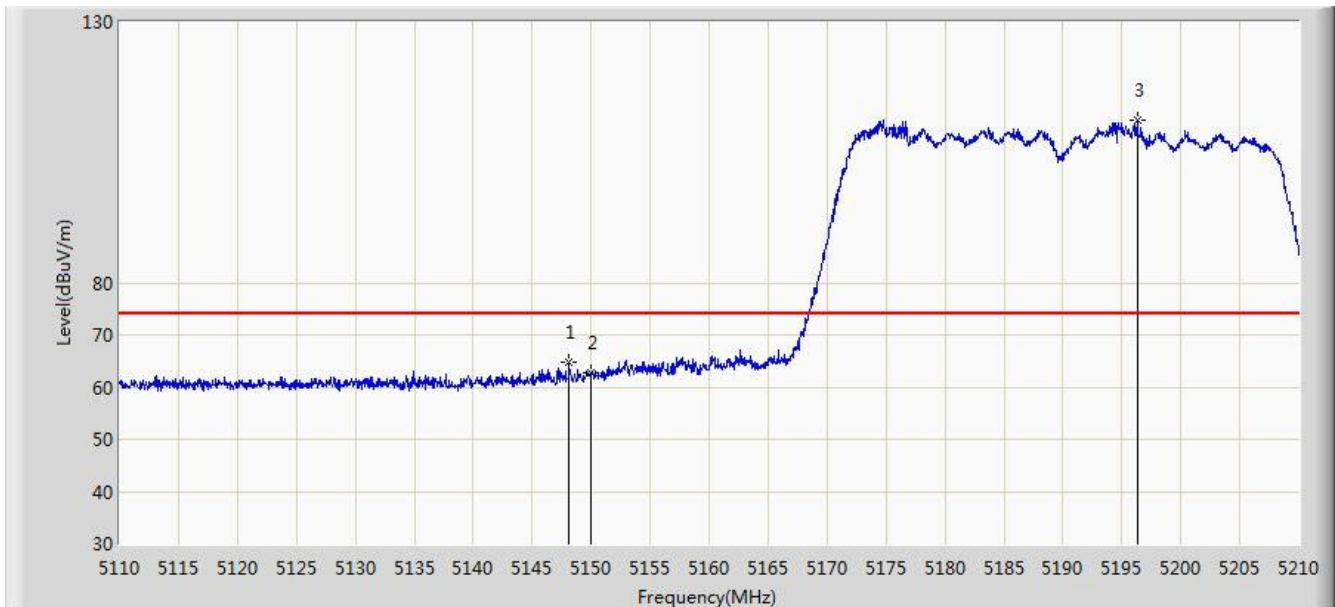


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.150        | 64.797                 | 60.622               | -9.203          | 74.000         | 4.175       | PK   |
| 2  |      |      | 5150.000        | 62.650                 | 58.481               | -11.350         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5196.300        | 111.133                | 107.122              | N/A             | N/A            | 4.011       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 04:27 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

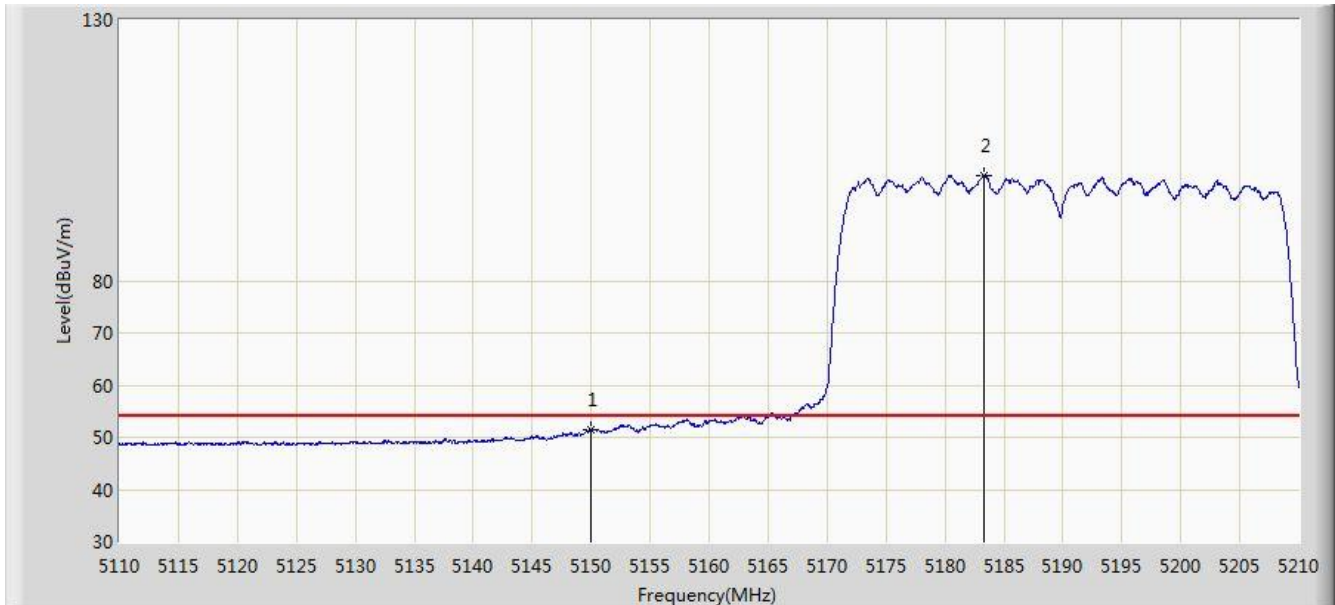


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 51.314                 | 47.145               | -2.686          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5183.300        | 100.206                | 96.149               | N/A             | N/A            | 4.057       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 04:24 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

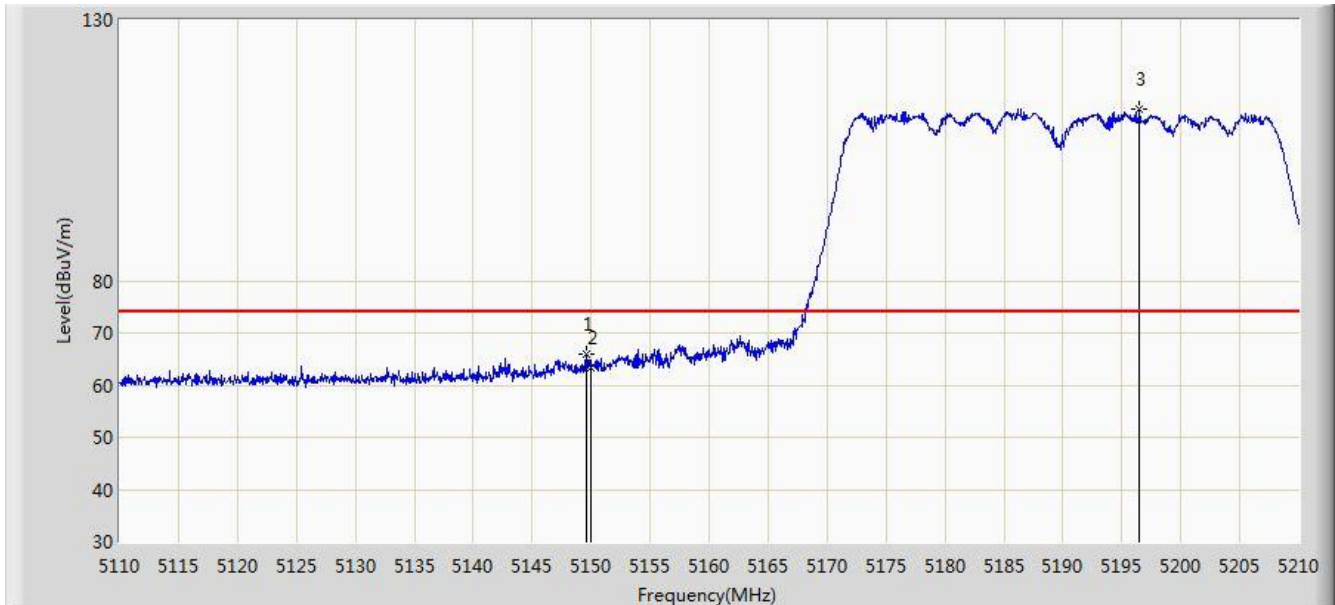


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.650        | 65.841                 | 61.671               | -8.159          | 74.000         | 4.170       | PK   |
| 2  |      |      | 5150.000        | 63.476                 | 59.307               | -10.524         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5196.500        | 112.865                | 108.855              | N/A             | N/A            | 4.010       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 04:22 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

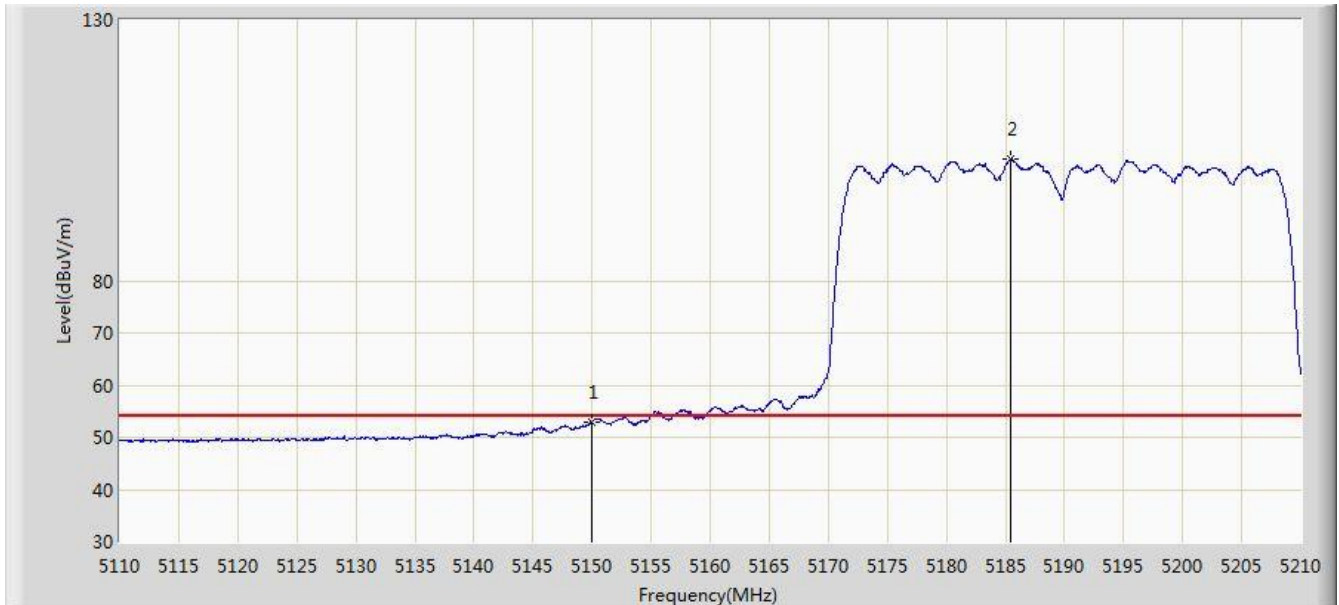


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5150.000        | 52.985                 | 48.816               | -1.015          | 54.000         | 4.170       | AV   |
| 2  |      | *    | 5185.500        | 103.201                | 99.152               | N/A             | N/A            | 4.049       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 04:59 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 |                          |

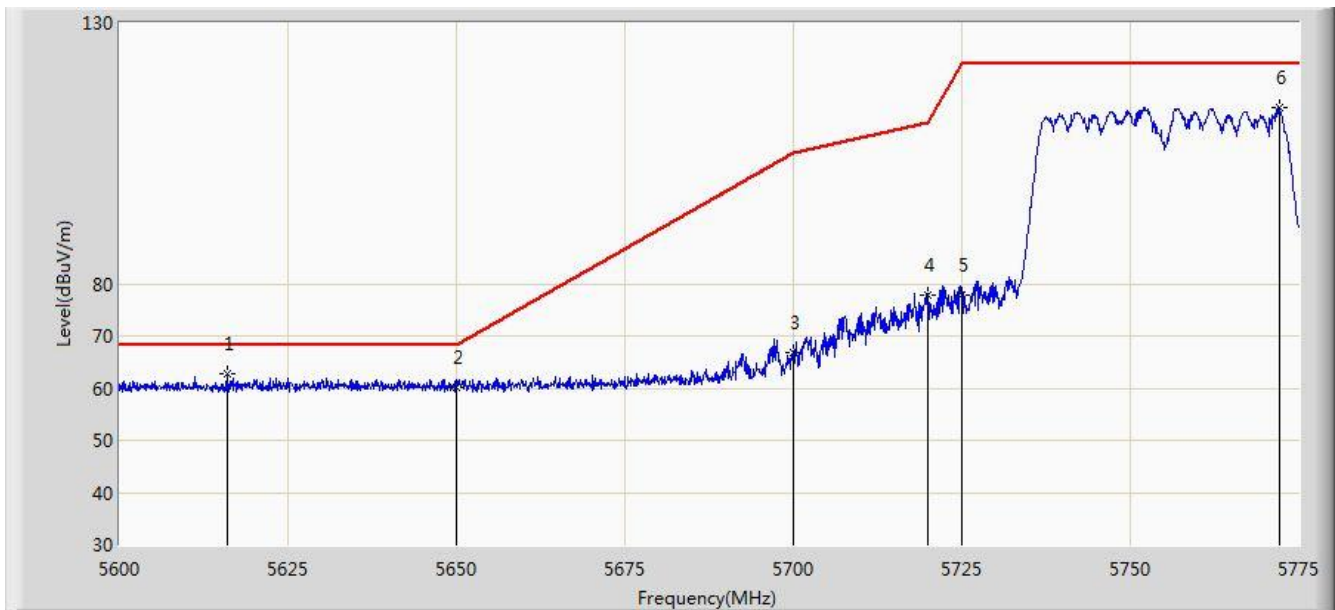


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5615.925        | 62.681                 | 58.112               | -5.519          | 68.200         | 4.569       | PK   |
| 2  |      |      | 5650.000        | 60.191                 | 55.520               | -8.009          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 66.896                 | 62.018               | -38.304         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 77.718                 | 72.721               | -33.082         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 77.713                 | 72.684               | -44.487         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5772.112        | 113.905                | 108.603              | N/A             | N/A            | 5.302       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 05:02 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 |                          |

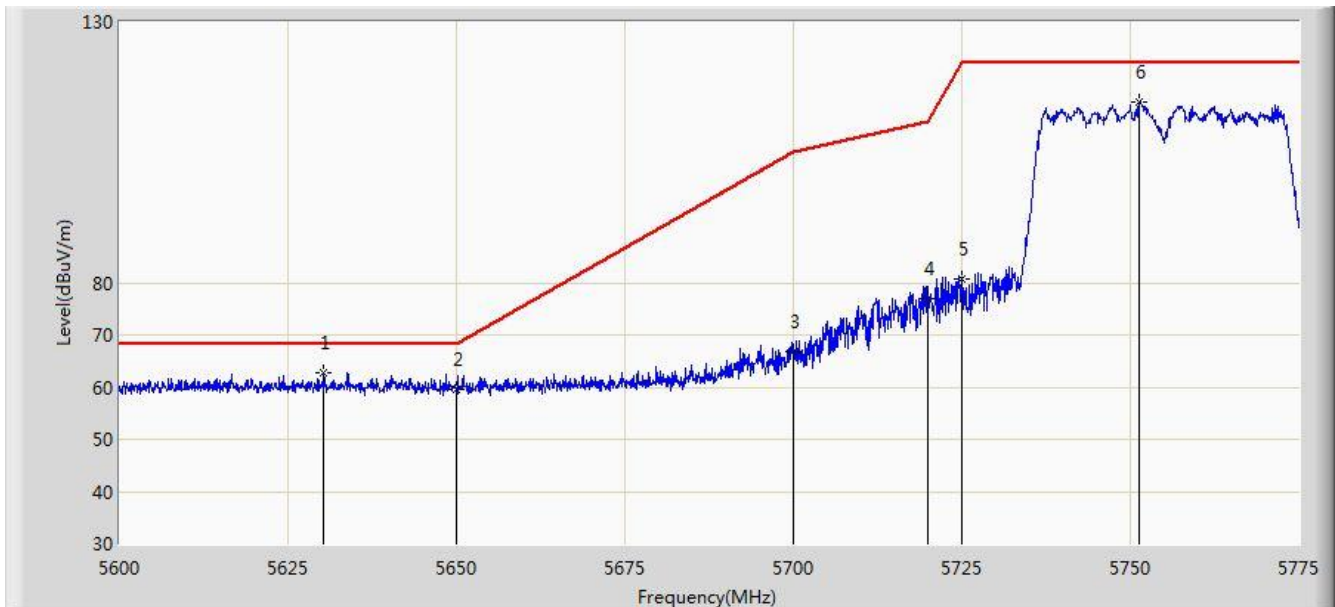


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5630.362        | 62.764                 | 58.154               | -5.436          | 68.200         | 4.610       | PK   |
| 2  |      |      | 5650.000        | 59.577                 | 54.906               | -8.623          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 66.902                 | 62.024               | -38.298         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 77.040                 | 72.043               | -33.760         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 80.686                 | 75.657               | -41.514         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5751.375        | 114.661                | 109.470              | N/A             | N/A            | 5.191       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 05:12 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 |                          |

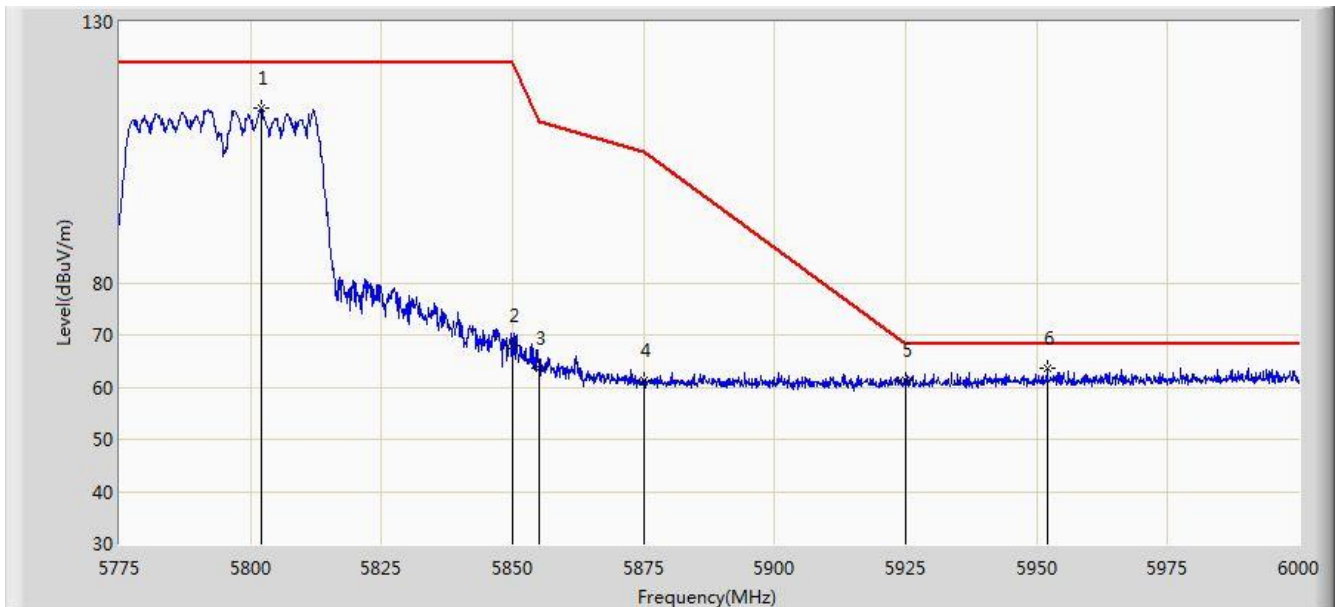


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5802.112        | 113.481                | 108.024              | N/A             | N/A            | 5.457       | PK   |
| 2  |      |      | 5850.000        | 67.915                 | 62.189               | -54.285         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 63.718                 | 57.972               | -47.082         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 61.205                 | 55.385               | -43.995         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 61.265                 | 55.299               | -6.935          | 68.200         | 5.967       | PK   |
| 6  |      | *    | 5951.962        | 63.590                 | 57.560               | -4.610          | 68.200         | 6.030       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 05:13 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 |                          |

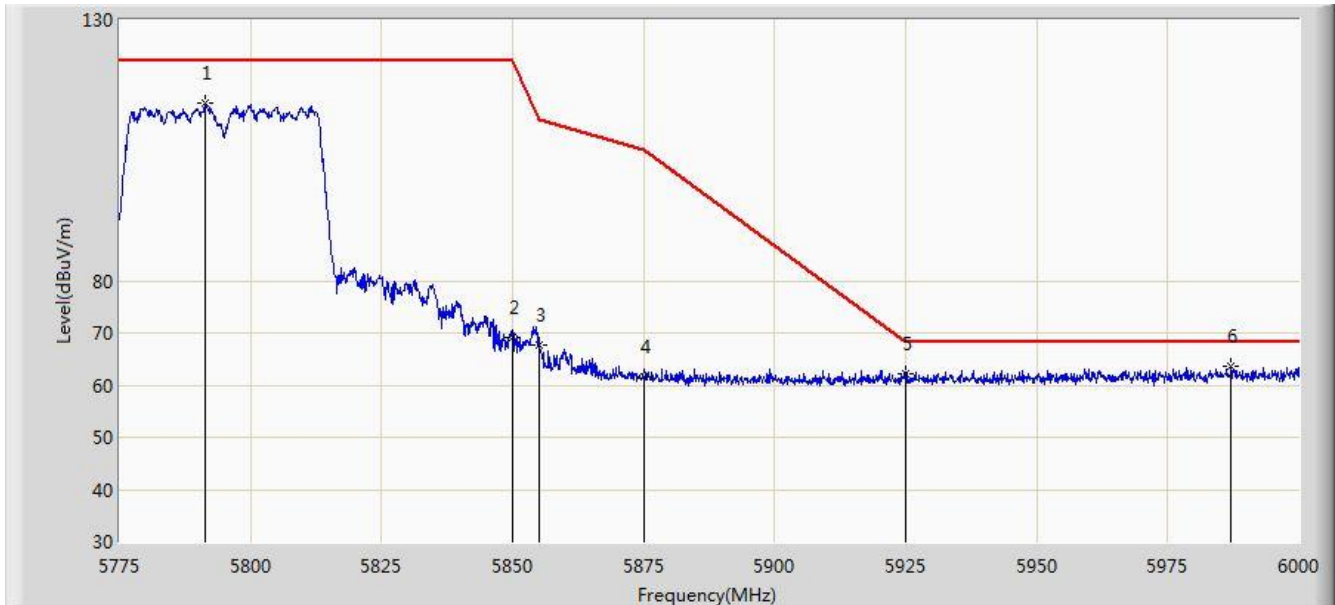


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5791.425        | 113.994                | 108.595              | N/A             | N/A            | 5.399       | PK   |
| 2  |      |      | 5850.000        | 69.242                 | 63.516               | -52.958         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 67.586                 | 61.840               | -43.214         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 61.731                 | 55.911               | -43.469         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 62.169                 | 56.203               | -6.031          | 68.200         | 5.967       | PK   |
| 6  |      | *    | 5987.062        | 63.713                 | 57.624               | -4.487          | 68.200         | 6.089       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 05:34 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

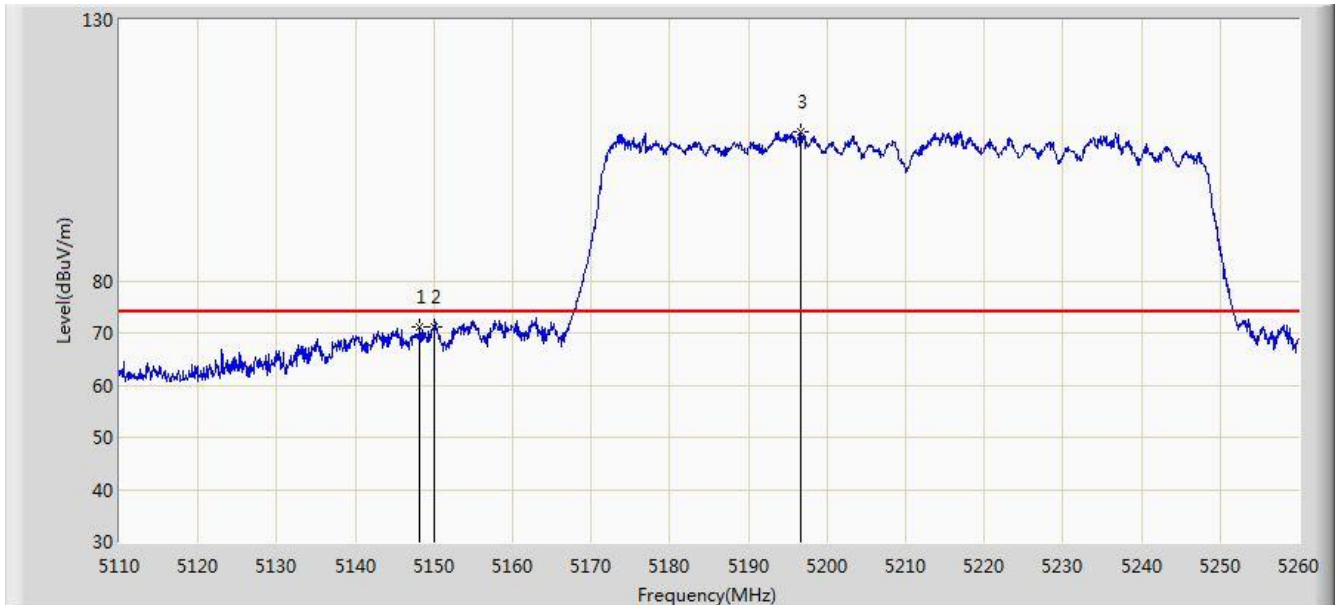


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.250        | 71.048                 | 66.873               | -2.952          | 74.000         | 4.174       | PK   |
| 2  |      |      | 5150.000        | 71.285                 | 67.116               | -2.715          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5196.700        | 108.643                | 104.633              | N/A             | N/A            | 4.010       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 05:36 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

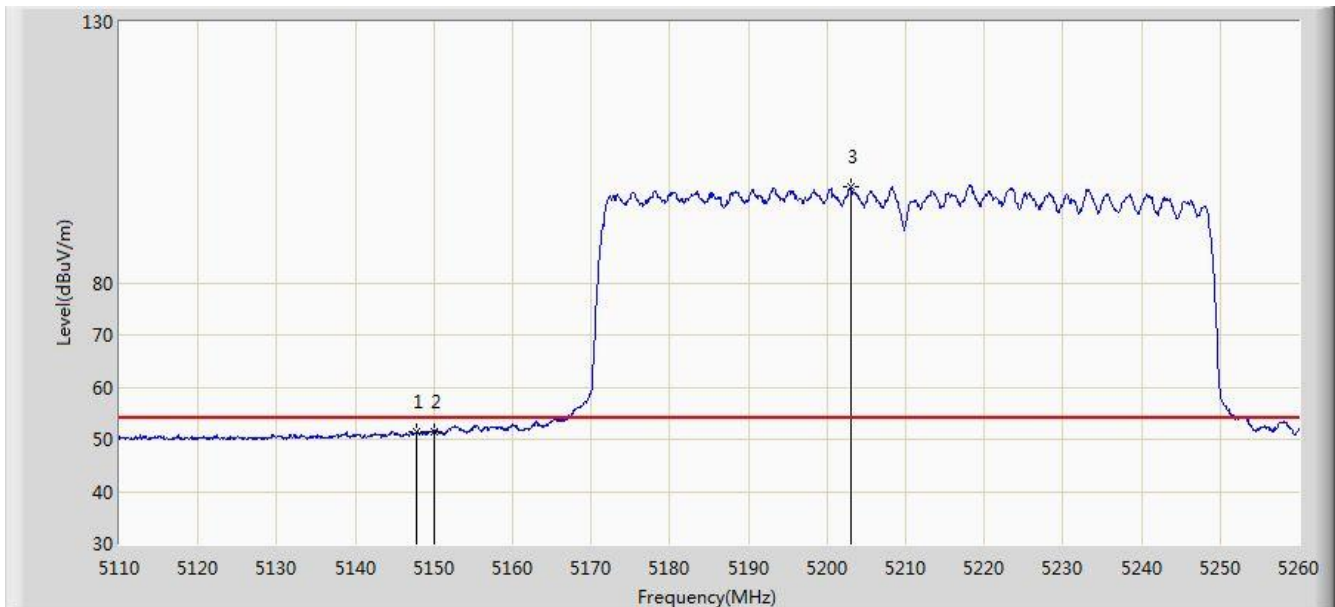


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.875        | 51.561                 | 47.385               | -2.439          | 54.000         | 4.176       | AV   |
| 2  |      |      | 5150.000        | 51.475                 | 47.306               | -2.525          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5203.000        | 98.303                 | 94.314               | N/A             | N/A            | 3.990       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 05:31 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

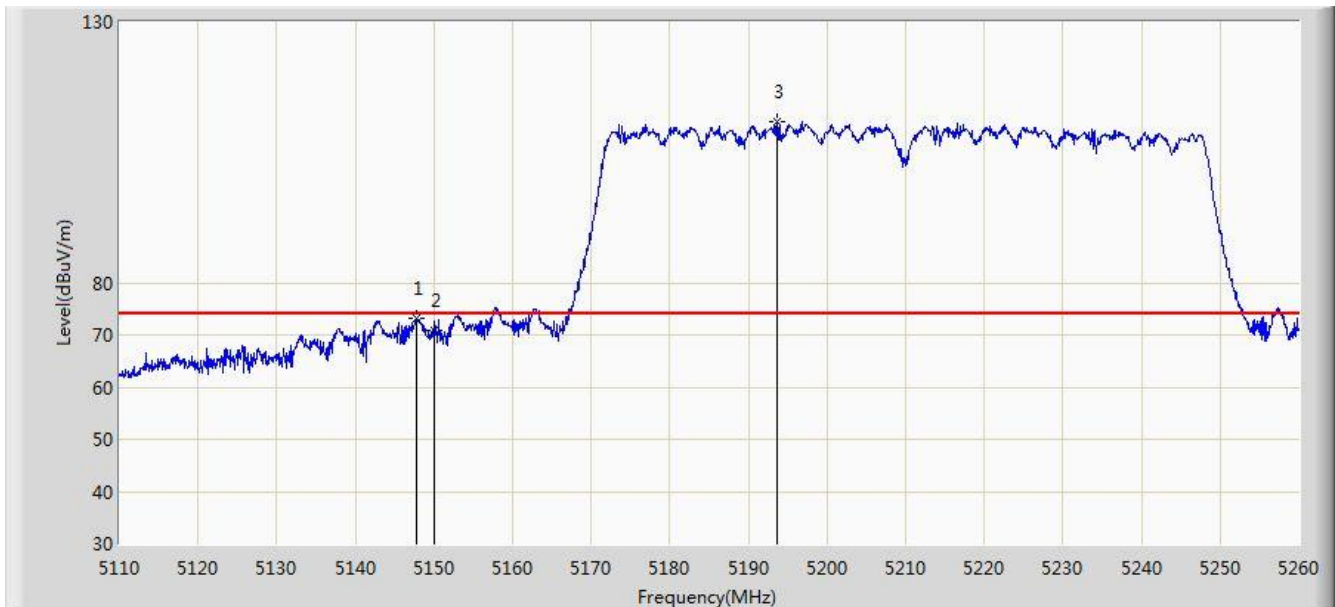


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.725        | 73.107                 | 68.931               | -0.893          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 70.788                 | 66.619               | -3.212          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5193.625        | 110.886                | 106.865              | N/A             | N/A            | 4.020       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 05:26 |
| Limit: FCC_Part15.209_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

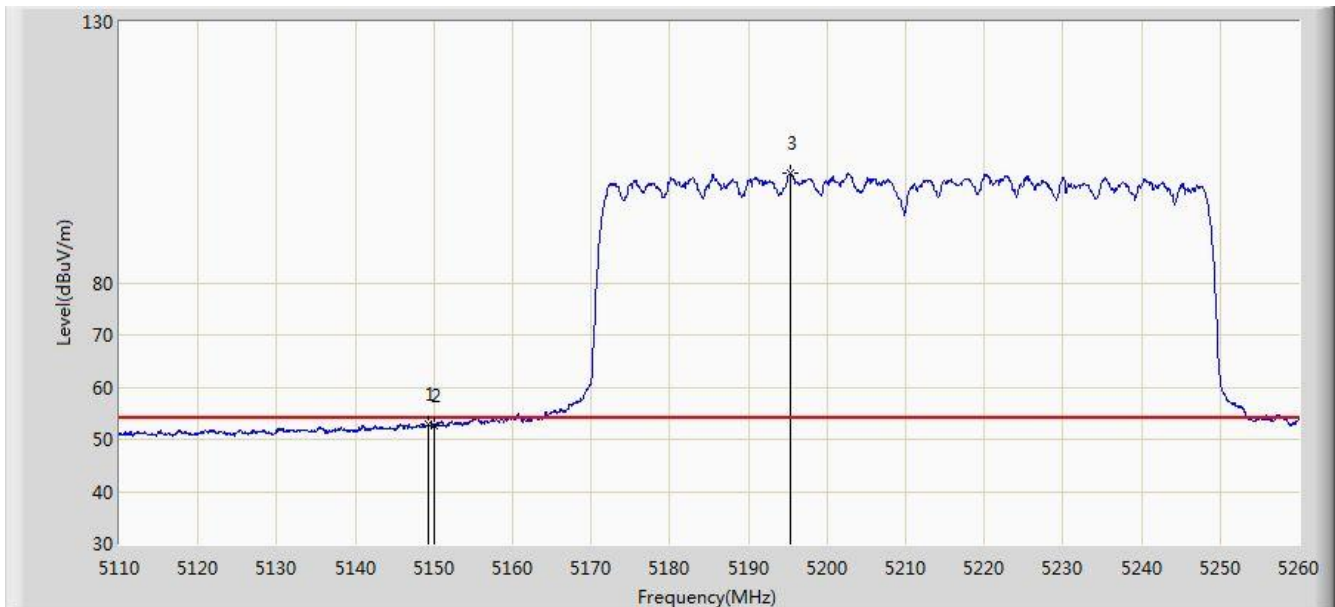


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.225        | 52.909                 | 48.737               | -1.091          | 54.000         | 4.172       | AV   |
| 2  |      |      | 5150.000        | 52.741                 | 48.572               | -1.259          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5195.425        | 100.970                | 96.956               | N/A             | N/A            | 4.014       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 06:26 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 |                          |

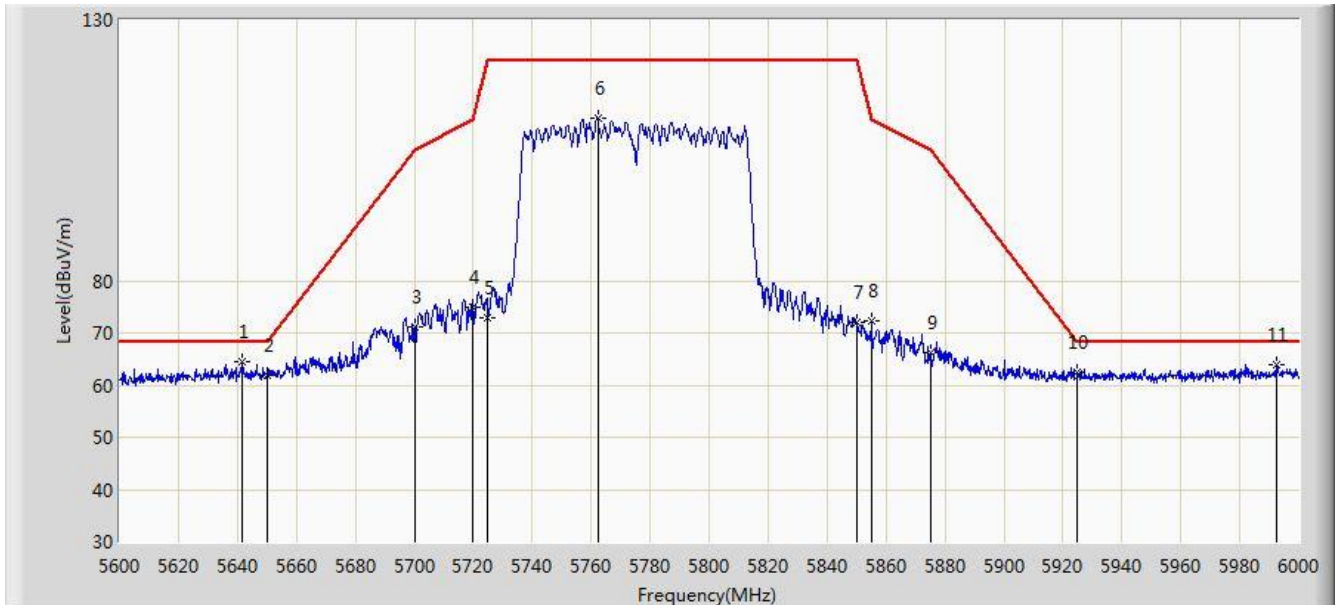


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5641.800        | 64.381                 | 59.737               | -3.819          | 68.200         | 4.643       | PK   |
| 2  |      |      | 5650.000        | 61.863                 | 57.192               | -6.337          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 71.098                 | 66.220               | -34.102         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 74.961                 | 69.964               | -35.839         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 72.912                 | 67.883               | -49.288         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5762.200        | 111.286                | 106.035              | N/A             | N/A            | 5.251       | PK   |
| 7  |      |      | 5850.000        | 71.930                 | 66.204               | -50.270         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 72.263                 | 66.517               | -38.537         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 66.201                 | 60.381               | -38.999         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 62.393                 | 56.427               | -5.807          | 68.200         | 5.967       | PK   |
| 11 |      |      | 5992.600        | 63.917                 | 57.819               | -4.283          | 68.200         | 6.098       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                            |                          |
|----------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                  | Time: 2018/06/20 - 06:28 |
| Limit: FCC_Part15.407_RE(3m)                                               | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                                | Polarity: Vertical       |
| EUT: ACCESS POINT                                                          | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz Ant 0 + 1 + 2 + 3 |                          |

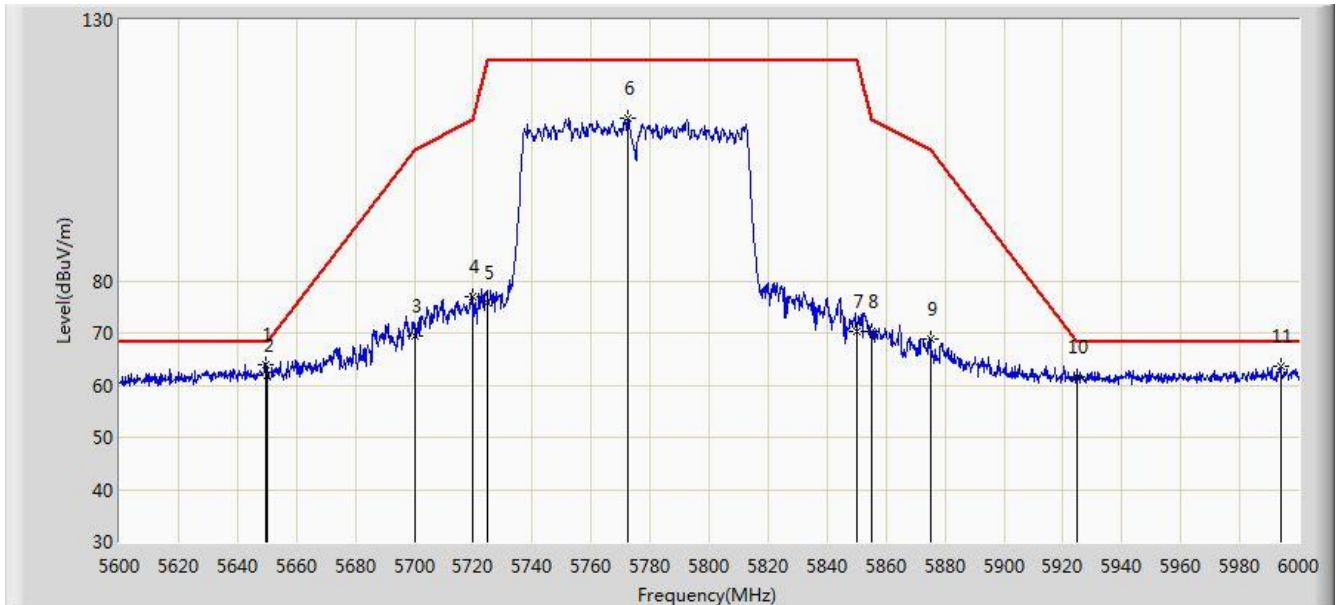


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5649.400        | 64.057                 | 59.388               | -4.143          | 68.200         | 4.669       | PK   |
| 2  |      |      | 5650.000        | 61.937                 | 57.266               | -6.263          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 69.402                 | 64.524               | -35.798         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 77.047                 | 72.050               | -33.753         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 75.913                 | 70.884               | -46.287         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5772.400        | 111.103                | 105.800              | N/A             | N/A            | 5.303       | PK   |
| 7  |      |      | 5850.000        | 70.150                 | 64.424               | -52.050         | 122.200        | 5.726       | PK   |
| 8  |      |      | 5855.000        | 70.304                 | 64.558               | -40.496         | 110.800        | 5.746       | PK   |
| 9  |      |      | 5875.000        | 68.904                 | 63.084               | -36.296         | 105.200        | 5.820       | PK   |
| 10 |      |      | 5925.000        | 61.732                 | 55.766               | -6.468          | 68.200         | 5.967       | PK   |
| 11 |      |      | 5994.000        | 63.533                 | 57.433               | -4.667          | 68.200         | 6.101       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 06:41 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

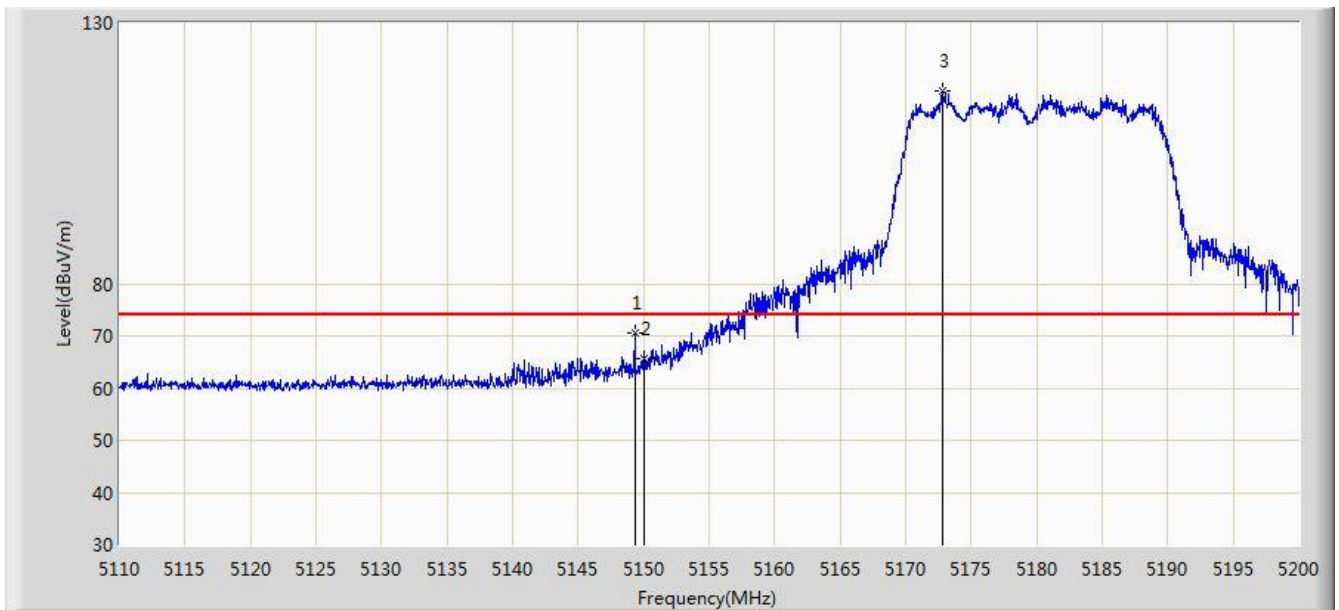


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.330        | 70.473                 | 66.302               | -3.527          | 74.000         | 4.171       | PK   |
| 2  |      |      | 5150.000        | 65.706                 | 61.537               | -8.294          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5172.775        | 116.885                | 112.791              | N/A             | N/A            | 4.094       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 06:42 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

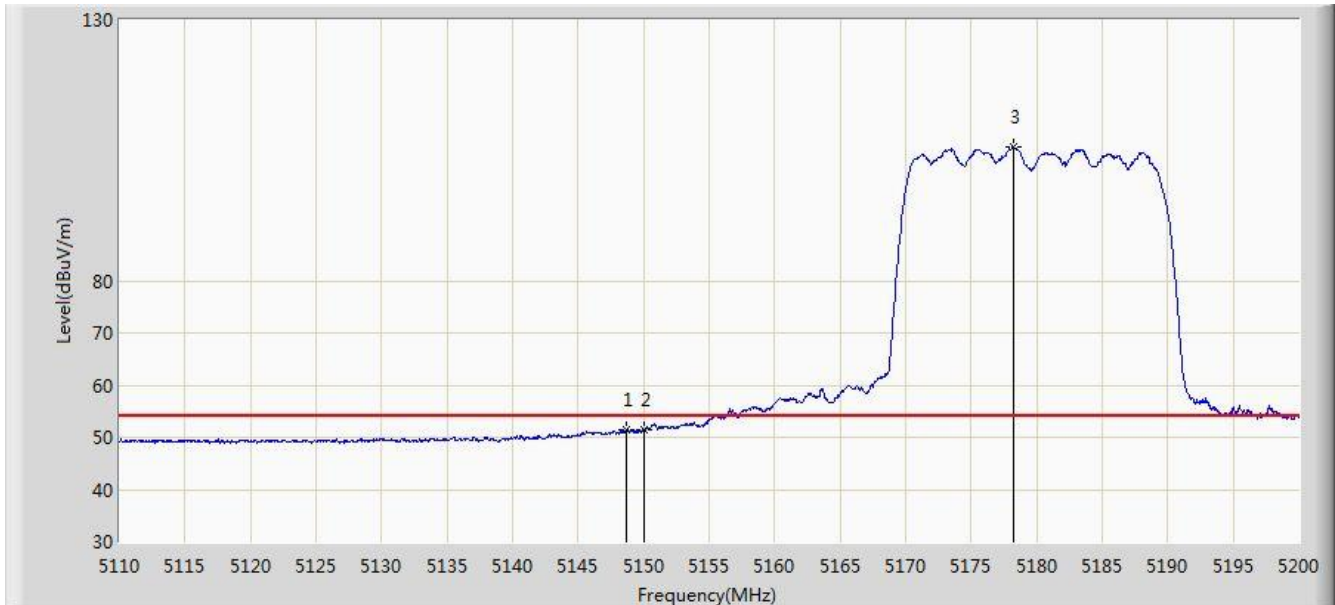


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.700        | 51.555                 | 47.382               | -2.445          | 54.000         | 4.174       | AV   |
| 2  |      |      | 5150.000        | 51.395                 | 47.226               | -2.605          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5178.220        | 105.622                | 101.547              | N/A             | N/A            | 4.075       | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 06:40 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

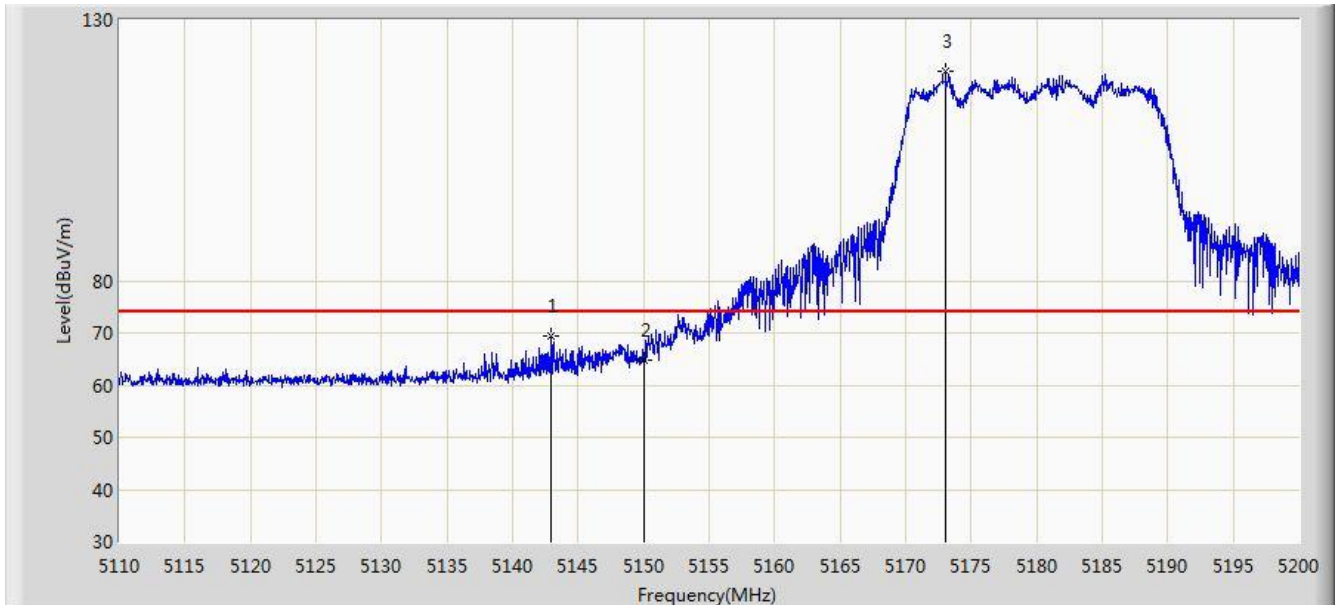


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5142.940        | 69.363                 | 65.187               | -4.637          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 64.740                 | 60.571               | -9.260          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5173.045        | 120.152                | 116.058              | N/A             | N/A            | 4.094       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 06:38 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5180MHz Ant 0 + 1 + 2 + 3 |                          |

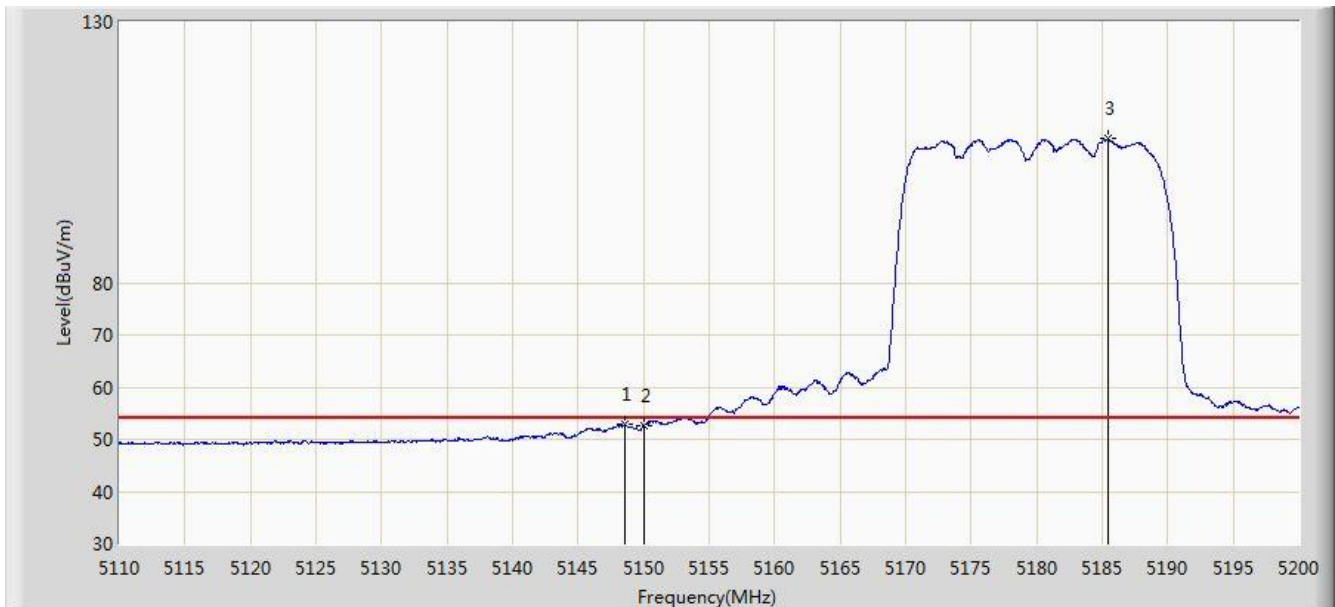


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.565        | 52.774                 | 48.600               | -1.226          | 54.000         | 4.173       | AV   |
| 2  |      |      | 5150.000        | 52.604                 | 48.435               | -1.396          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5185.465        | 107.557                | 103.507              | N/A             | N/A            | 4.049       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 07:24 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 |                          |

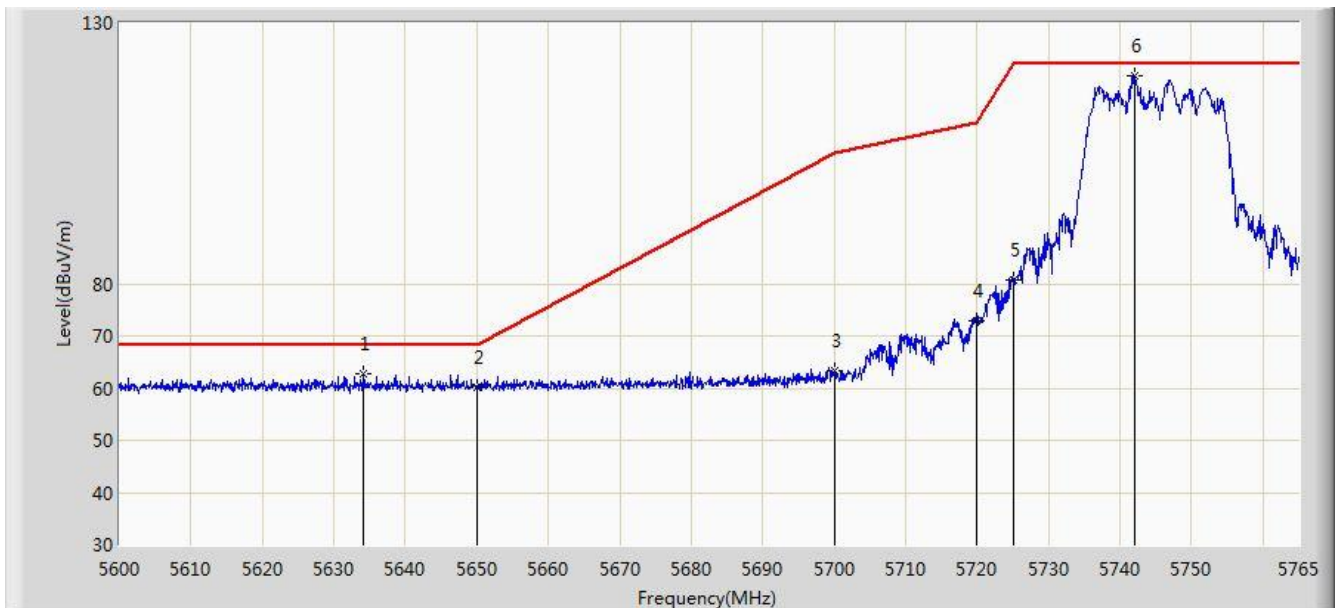


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5634.155        | 62.626                 | 58.005               | -5.574          | 68.200         | 4.621       | PK   |
| 2  |      |      | 5650.000        | 60.032                 | 55.361               | -8.168          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 63.299                 | 58.421               | -41.901         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 73.003                 | 68.006               | -37.797         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 80.845                 | 75.816               | -41.355         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5742.065        | 119.725                | 114.587              | N/A             | N/A            | 5.137       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 07:26 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5745MHz Ant 0 + 1 + 2 + 3 |                          |

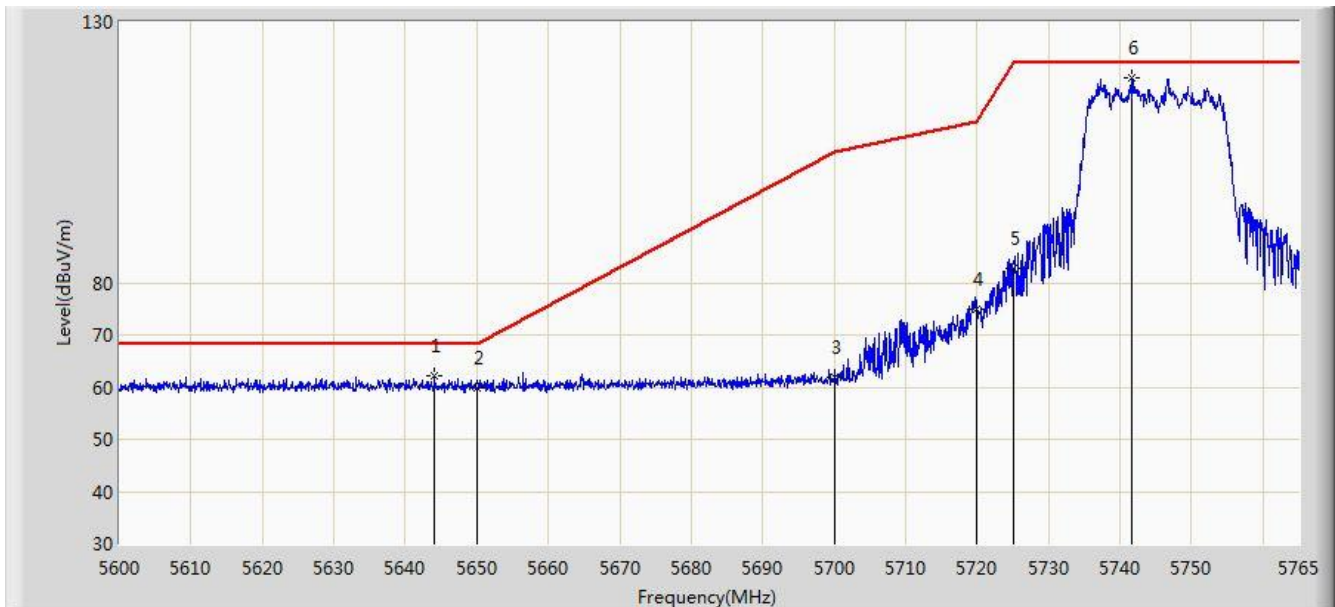


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5644.055        | 62.140                 | 57.489               | -6.060          | 68.200         | 4.651       | PK   |
| 2  |      |      | 5650.000        | 59.793                 | 55.122               | -8.407          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 61.861                 | 56.983               | -43.339         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 74.833                 | 69.836               | -35.967         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 82.773                 | 77.744               | -39.427         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5741.570        | 119.175                | 114.040              | N/A             | N/A            | 5.135       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 07:29 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 |                          |

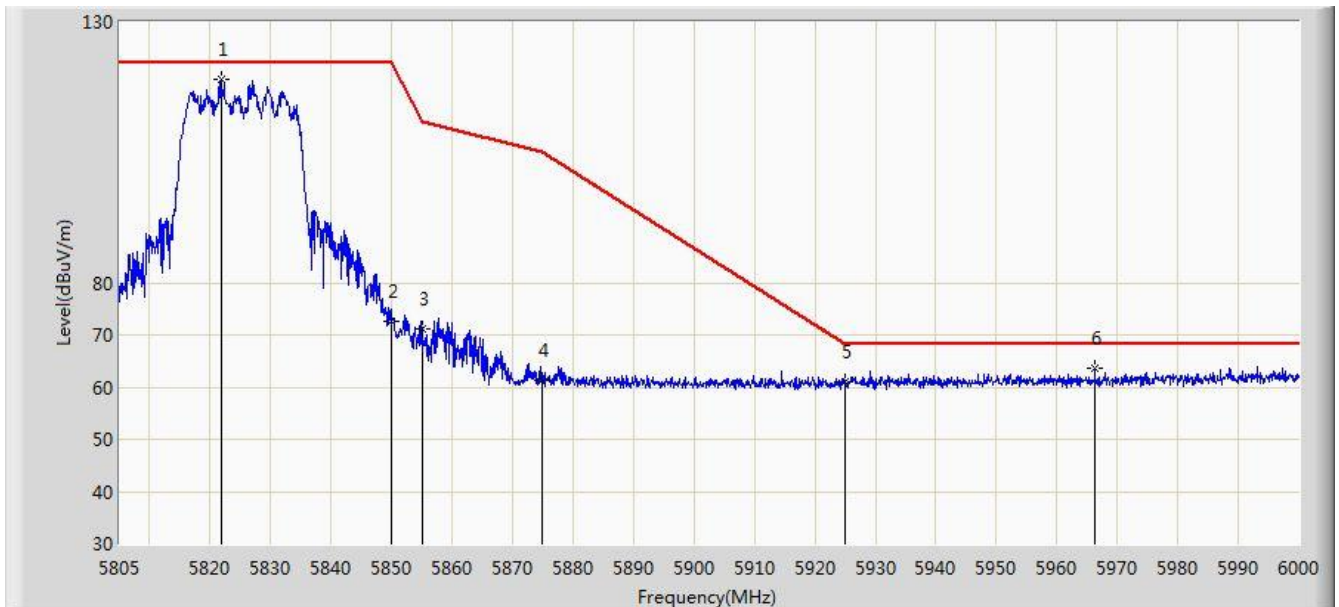


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5821.868        | 119.013                | 113.443              | N/A             | N/A            | 5.570       | PK   |
| 2  |      |      | 5850.000        | 72.496                 | 66.770               | -49.704         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 71.032                 | 65.286               | -39.768         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 61.296                 | 55.476               | -43.904         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 61.093                 | 55.127               | -7.107          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5966.265        | 63.658                 | 57.603               | -4.542          | 68.200         | 6.055       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 07:28 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 5825MHz Ant 0 + 1 + 2 + 3 |                          |

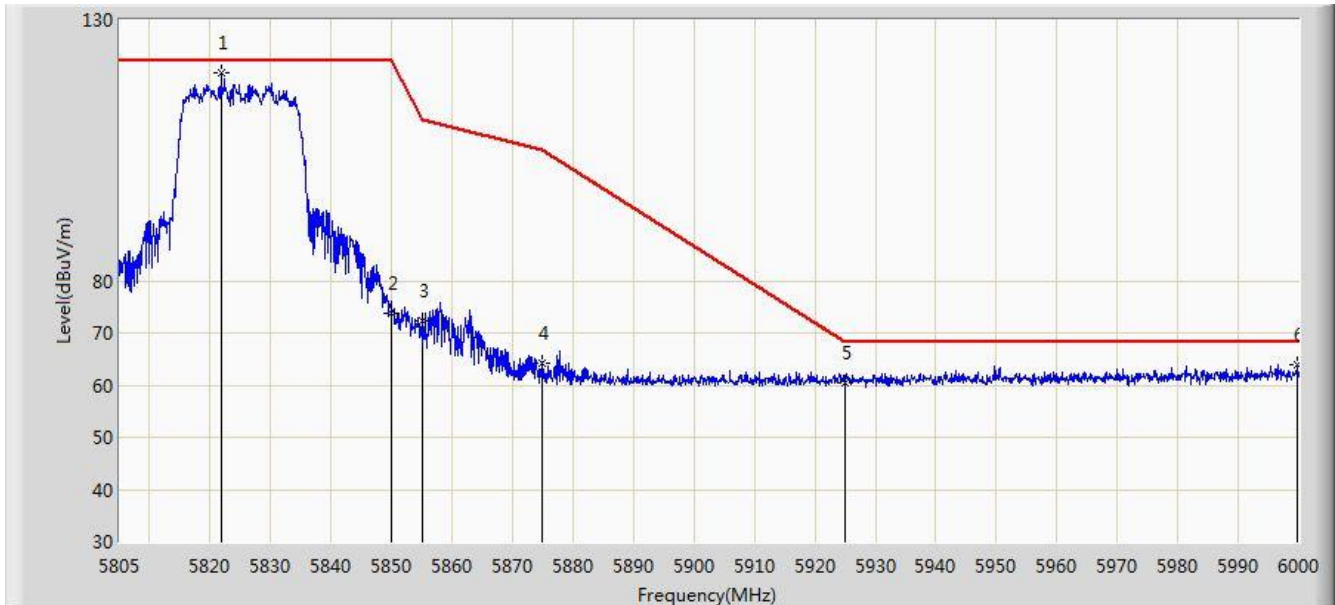


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5821.868        | 119.745                | 114.175              | N/A             | N/A            | 5.570       | PK   |
| 2  |      |      | 5850.000        | 73.852                 | 68.126               | -48.348         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 72.431                 | 66.685               | -38.369         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 64.253                 | 58.433               | -40.947         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 60.527                 | 54.561               | -7.673          | 68.200         | 5.967       | PK   |
| 6  |      |      | 5999.805        | 63.910                 | 57.799               | -4.290          | 68.200         | 6.112       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 07:37 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

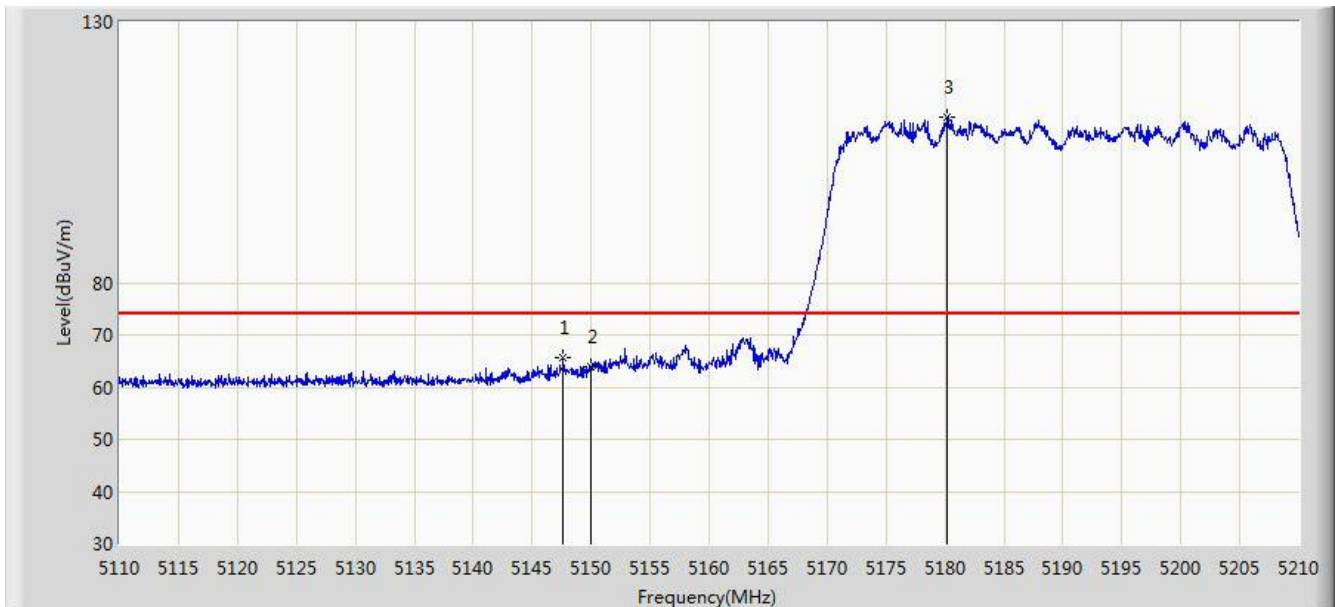


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.650        | 65.779                 | 61.603               | -8.221          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 63.929                 | 59.760               | -10.071         | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5180.200        | 111.850                | 107.782              | N/A             | N/A            | 4.068       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 07:38 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

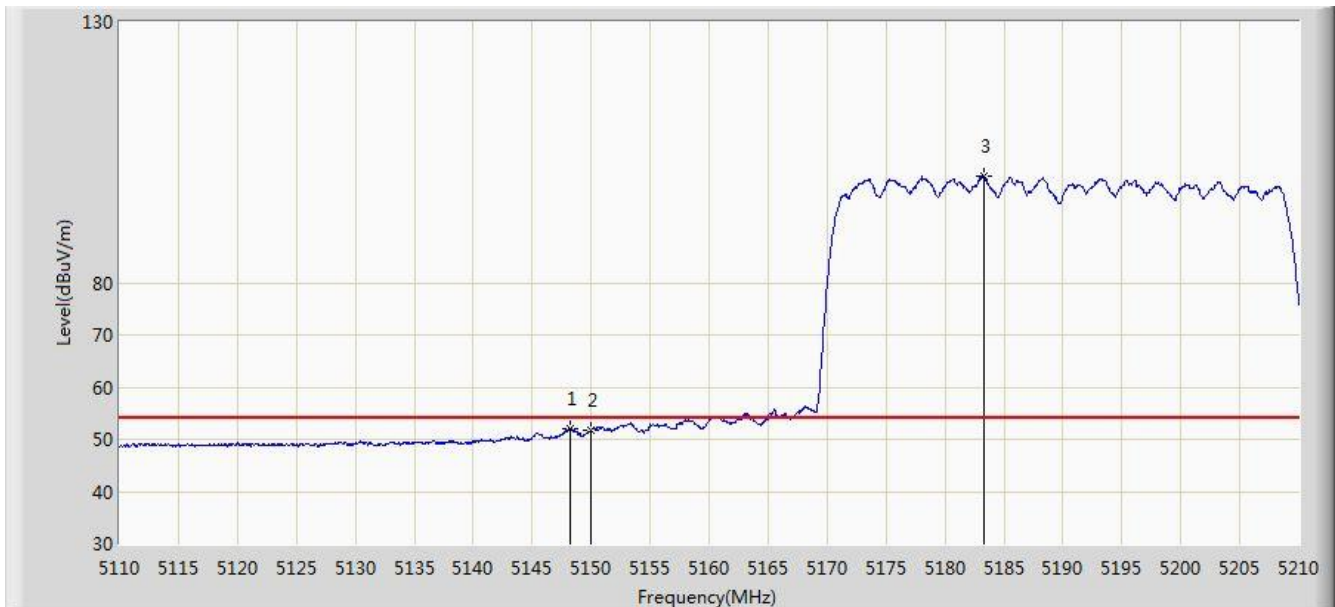


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5148.200        | 52.108                 | 47.933               | -1.892          | 54.000         | 4.174       | AV   |
| 2  |      |      | 5150.000        | 51.700                 | 47.531               | -2.300          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5183.350        | 100.460                | 96.403               | N/A             | N/A            | 4.056       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 07:35 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

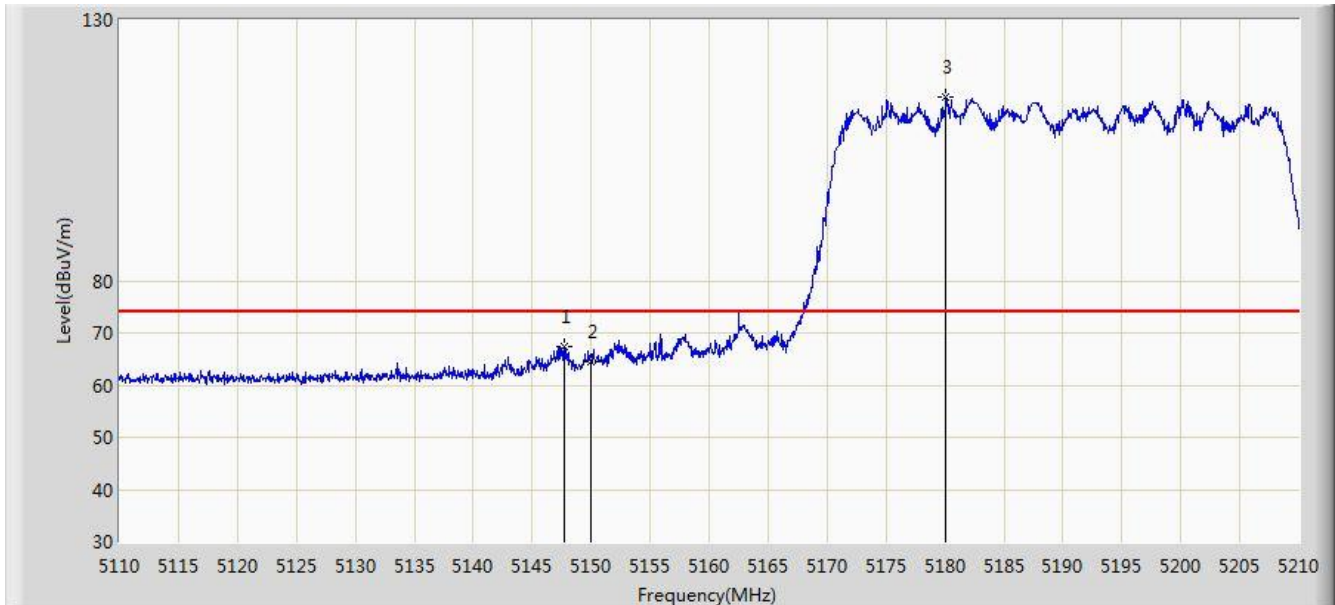


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.700        | 67.438                 | 63.262               | -6.562          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 64.566                 | 60.397               | -9.434          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5180.100        | 115.195                | 111.127              | N/A             | N/A            | 4.068       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 07:31 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5190MHz Ant 0 + 1 + 2 + 3 |                          |

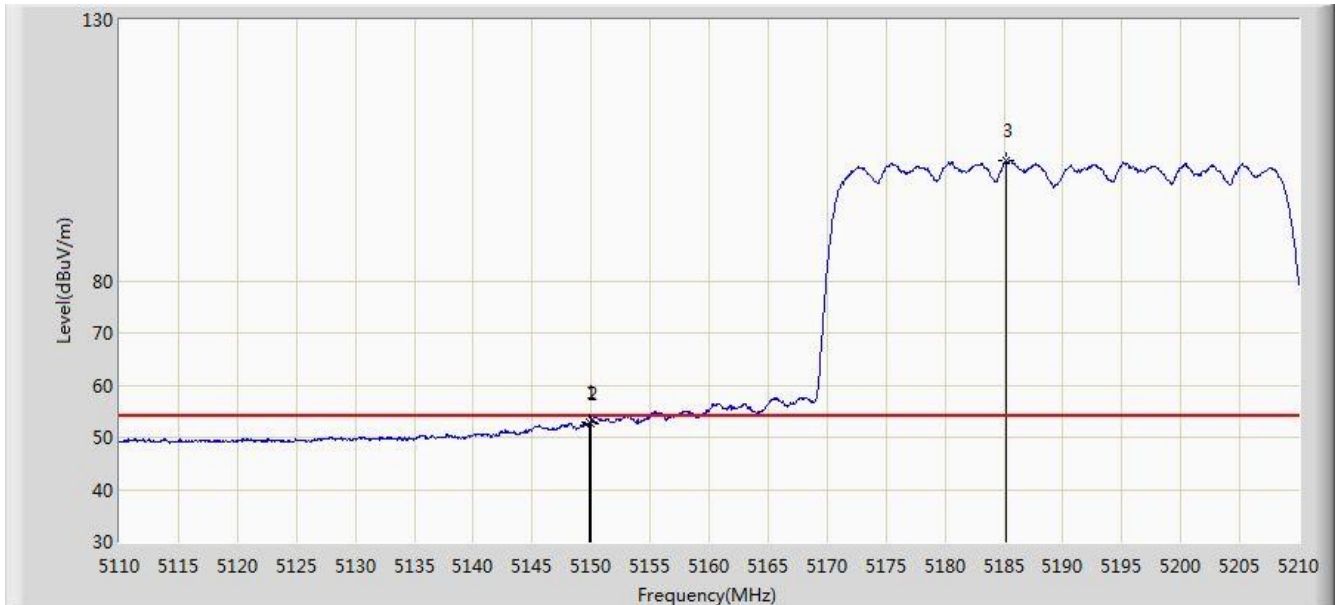


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5149.800        | 52.920                 | 48.750               | -1.080          | 54.000         | 4.169       | AV   |
| 2  |      |      | 5150.000        | 52.719                 | 48.550               | -1.281          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5185.200        | 103.148                | 99.098               | N/A             | N/A            | 4.050       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 08:08 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 |                          |

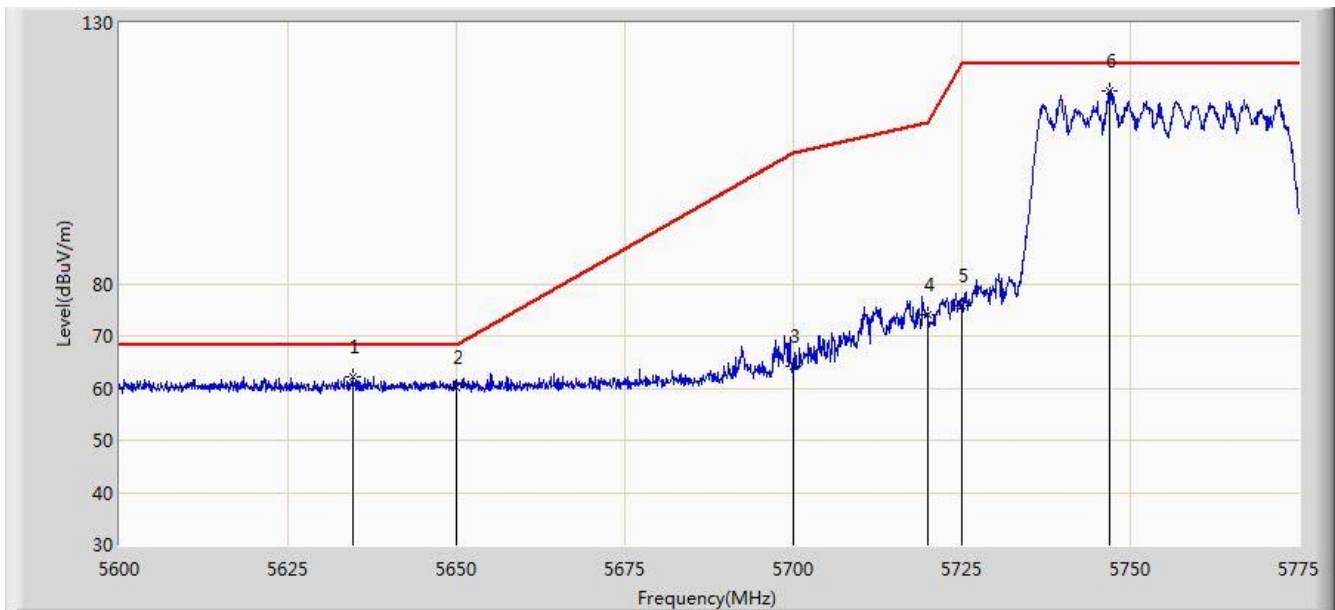


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5634.737        | 62.309                 | 57.686               | -5.891          | 68.200         | 4.623       | PK   |
| 2  |      |      | 5650.000        | 60.118                 | 55.447               | -8.082          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 64.130                 | 59.252               | -41.070         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 74.060                 | 69.063               | -36.740         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 75.942                 | 70.913               | -46.258         | 122.200        | 5.029       | PK   |
| 6  |      | *    | 5747.000        | 116.903                | 111.737              | N/A             | N/A            | 5.166       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 08:09 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5755MHz Ant 0 + 1 + 2 + 3 |                          |

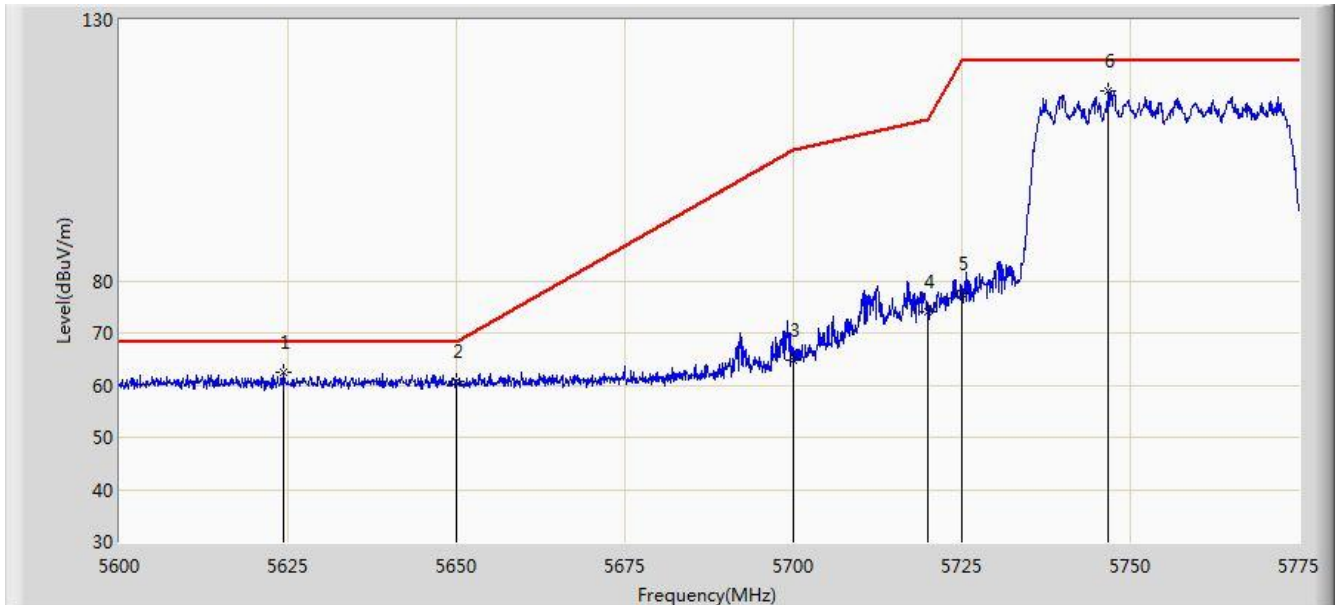


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 5624.325        | 62.513                 | 57.920               | -5.687          | 68.200         | 4.592       | PK   |
| 2  |      |      | 5650.000        | 60.814                 | 56.143               | -7.386          | 68.200         | 4.671       | PK   |
| 3  |      |      | 5700.000        | 64.652                 | 59.774               | -40.548         | 105.200        | 4.878       | PK   |
| 4  |      |      | 5720.000        | 73.949                 | 68.952               | -36.851         | 110.800        | 4.997       | PK   |
| 5  |      |      | 5725.000        | 77.471                 | 72.442               | -44.729         | 122.200        | 5.029       | PK   |
| 6  |      |      | 5746.650        | 116.251                | 111.087              | N/A             | N/A            | 5.165       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 08:13 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 |                          |

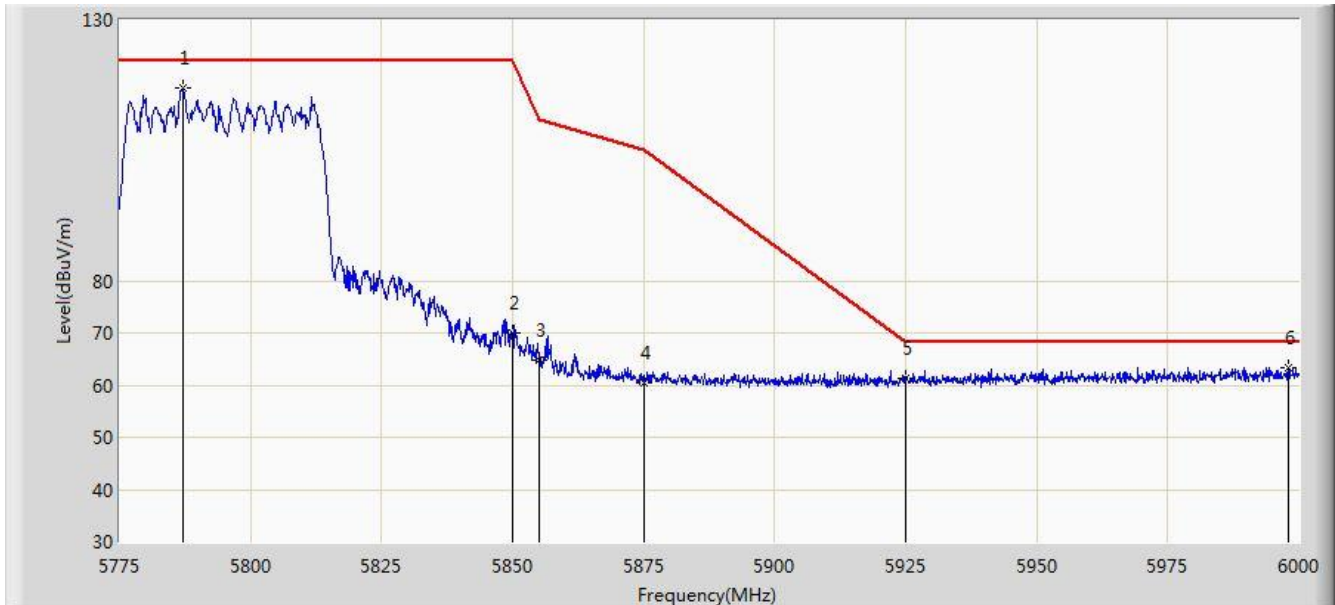


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5787.150        | 116.927                | 111.550              | N/A             | N/A            | 5.378       | PK   |
| 2  |      |      | 5850.000        | 70.135                 | 64.409               | -52.065         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 64.916                 | 59.170               | -45.884         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 60.290                 | 54.470               | -44.910         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 61.231                 | 55.265               | -6.969          | 68.200         | 5.967       | PK   |
| 6  |      | *    | 5997.975        | 63.408                 | 57.301               | -4.792          | 68.200         | 6.107       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 08:11 |
| Limit: FCC_Part15.407_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Vertical       |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 5795MHz Ant 0 + 1 + 2 + 3 |                          |

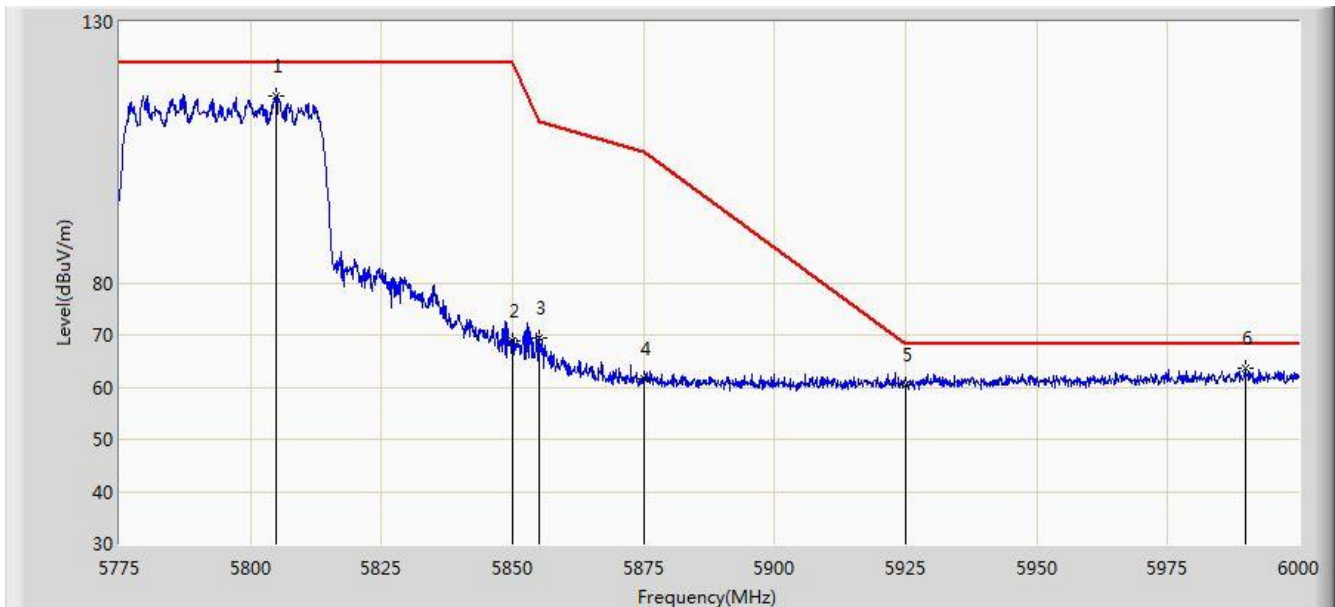


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5804.925        | 115.920                | 110.448              | N/A             | N/A            | 5.472       | PK   |
| 2  |      |      | 5850.000        | 68.783                 | 63.057               | -53.417         | 122.200        | 5.726       | PK   |
| 3  |      |      | 5855.000        | 69.468                 | 63.722               | -41.332         | 110.800        | 5.746       | PK   |
| 4  |      |      | 5875.000        | 61.517                 | 55.697               | -43.683         | 105.200        | 5.820       | PK   |
| 5  |      |      | 5925.000        | 60.363                 | 54.397               | -7.837          | 68.200         | 5.967       | PK   |
| 6  |      | *    | 5989.763        | 63.746                 | 57.652               | -4.454          | 68.200         | 6.093       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 08:21 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

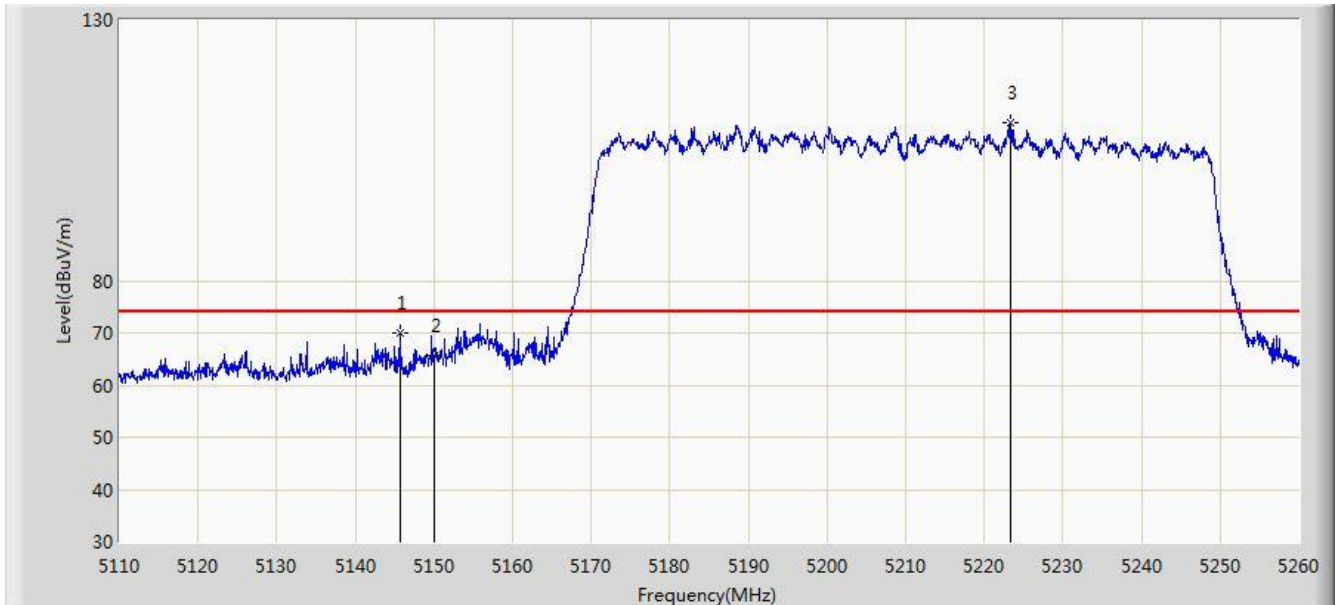


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5145.625        | 69.912                 | 65.736               | -4.088          | 74.000         | 4.176       | PK   |
| 2  |      |      | 5150.000        | 65.620                 | 61.451               | -8.380          | 74.000         | 4.170       | PK   |
| 3  |      | *    | 5223.325        | 110.169                | 106.240              | N/A             | N/A            | 3.929       | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                                           |                          |
|---------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                 | Time: 2018/06/20 - 08:22 |
| Limit: FCC_Part15.209_RE(3m)                                              | Engineer: Kevin          |
| Probe: BBHA9120D_1GHz_18GHz                                               | Polarity: Horizontal     |
| EUT: ACCESS POINT                                                         | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE80 at Channel 5210MHz Ant 0 + 1 + 2 + 3 |                          |

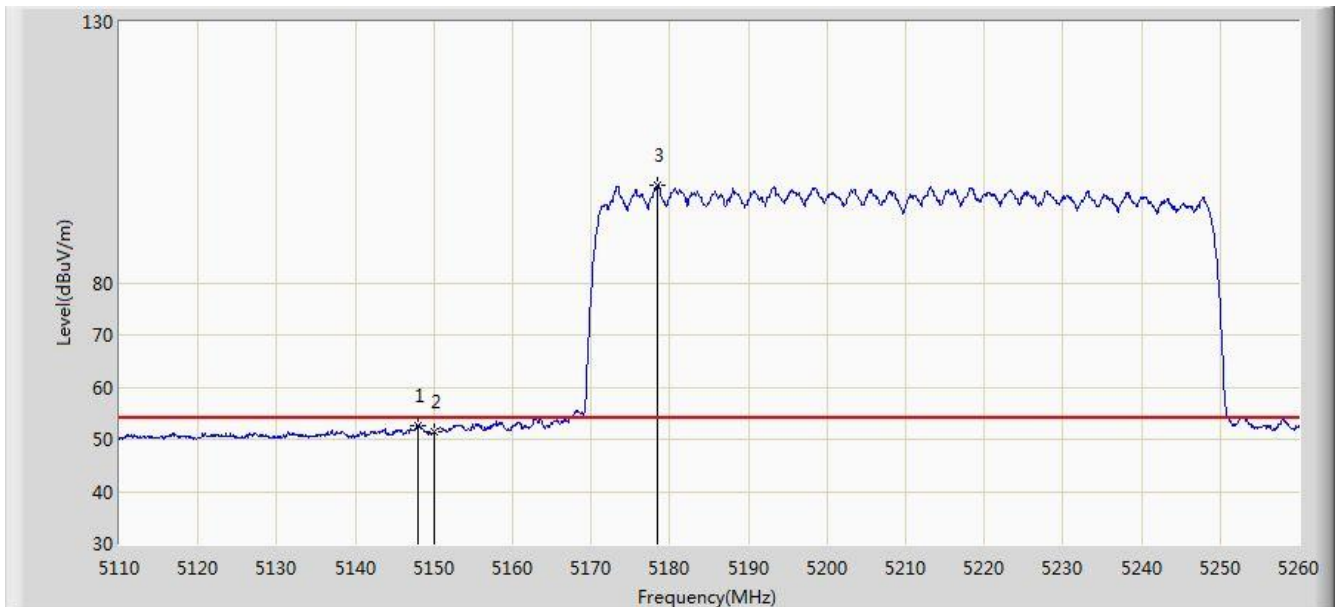

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 5147.950        | 52.707                 | 48.531               | -1.293          | 54.000         | 4.176       | AV   |
| 2  |      |      | 5150.000        | 51.363                 | 47.194               | -2.637          | 54.000         | 4.170       | AV   |
| 3  |      | *    | 5178.475        | 98.836                 | 94.762               | N/A             | N/A            | 4.074       | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)