


REVISIONS

REV	DESCRIPTION	DATE	APPROVE

NOTE:


- 1.MATERIAL: PC FILM(SABIC-LEXAN 8B35), t=0.127
- 2.ADHESIVE: 3M-467,t=0.05 mm
3. COLOR: PMS BLACK C ■  
PMS GRAY 3C ■  
刀模: R=0.2
4. UL APPROVED, PGDQ2.CM-100-PCM
- 5.被貼物:鋁壓鑄
- 6.TEMPERATURE RESISTANT= 120° C
- 7.印刷公差:尺寸30mm以下~120mm為±0.3mm,120~315mm為±0.5mm,315以上±0.8mm
- 8.片狀入料
- 9.TEST REQUIREMENTS

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.

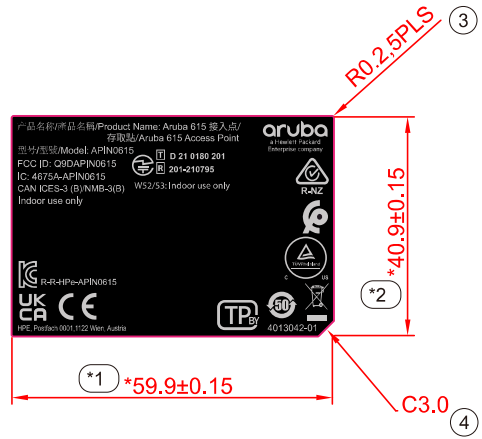

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: INTEGRAL DIMENSIONS ± 0.2 1 PLACE DECIMAL ± 0.2 ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2	THIRD ANGLE PROJECTION 	<b>WNC 啟碁科技股份有限公司</b> Wistron NeWeb Corp. 20 Park Avenue II, Hsinchu Science Park, Hsinchu 309, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
		DWG TITLE	
DRAWN	ENGR	SIZE <b>A4</b>	DWG NO.
APVD	SCALE 1/1	SHEET 1 OF 1	REV 1

Label Location

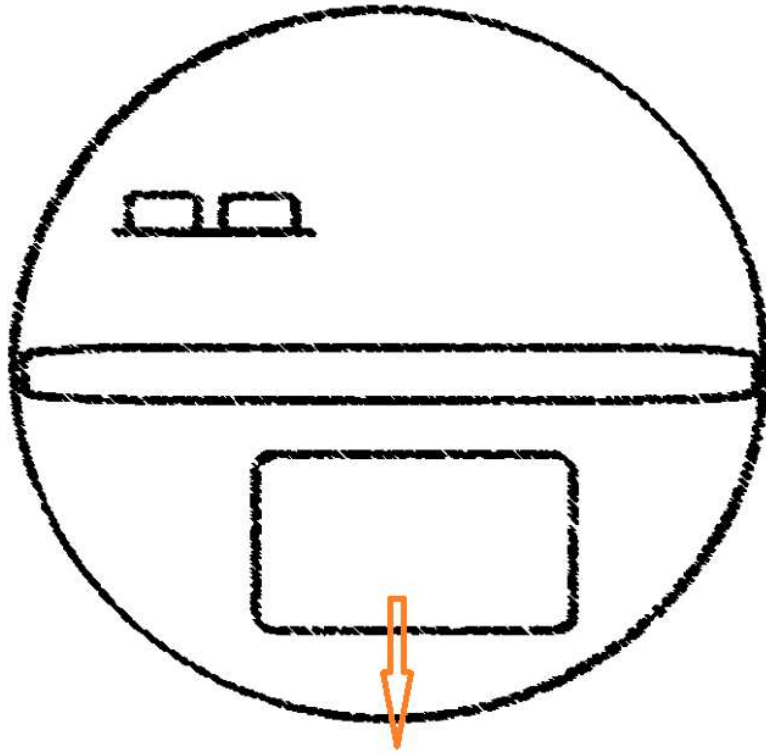

Label Location