


802.11be-EHT160 – Ant 3

Channel 15 (6025MHz)

The Reference Level

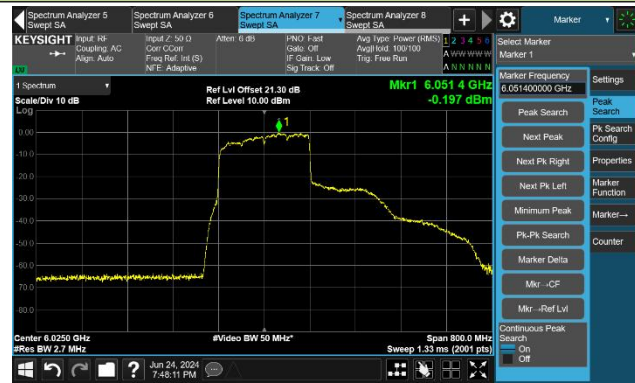

The Mask Data



Channel 47 (6185MHz)

The Reference Level



The Mask Data



Channel 79 (6345MHz)

The Reference Level



The Mask Data



802.11be-EHT160 – Ant 3

Channel 143 (6665MHz)

The Reference Level




The Mask Data



802.11be-EHT320 – Ant 3

Channel 31 (6105MHz)

The Reference Level

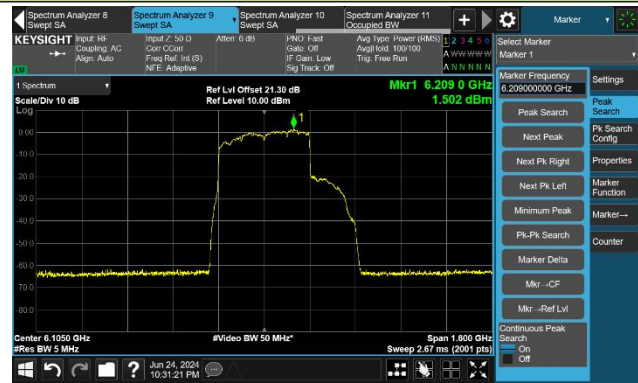


The Mask Data



802.11be-EHT320 – Ant 3

Channel 63 (6265MHz)

The Reference Level

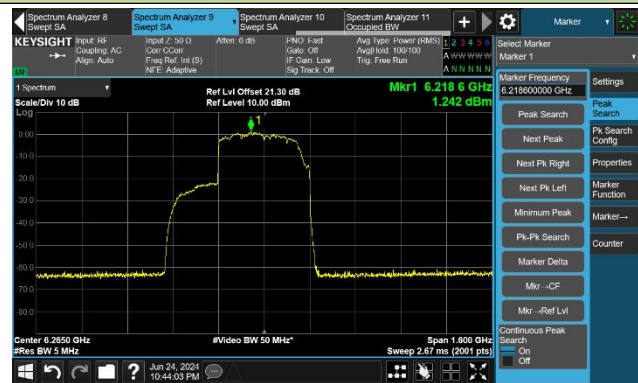

The Mask Data



A.6 Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Lynn Yang
Test Date	2024-10-12	Test Mode	6415MHz (Carrier Mode)

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	- 30	-11.1229	-11.1197	-11.1165	-11.1136
		- 20	-11.1420	-11.1363	-11.1332	-11.1268
		- 10	-11.1570	-11.1497	-11.1474	-11.1439
		0	-11.1825	-11.1639	-11.1618	-11.1602
		+ 10	-11.1896	-11.1873	-11.1849	-11.1839
		+ 20	-11.1900	-11.1935	-11.1939	-11.1916
		+ 30	-11.1804	-11.1843	-11.1865	-11.1891
		+ 40	-11.1627	-11.1722	-11.1743	-11.1786
		+ 50	-11.0588	-11.0509	-11.1512	-11.1526
115	138	+ 20	-11.1933	-11.1932	-11.1921	-11.1908
85	102	+ 20	-11.1935	-11.1923	-11.1919	-11.1897

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.

A.7 Radiated Spurious Emission Test Result

Antenna_311:

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11088.900	32.1	15.9	48.0	74.0	-26.0	Peak	Horizontal
	11681.370	31.6	16.3	47.9	74.0	-26.1	Peak	Horizontal
*	13956.450	32.1	18.7	50.8	88.2	-37.4	Peak	Horizontal
*	14829.000	32.1	18.6	50.7	88.2	-37.5	Peak	Horizontal
	11122.480	31.2	15.7	46.9	74.0	-27.1	Peak	Vertical
	11909.170	34.8	16.2	51.0	74.0	-23.0	Peak	Vertical
*	14147.280	31.0	18.9	49.9	88.2	-38.3	Peak	Vertical
*	14934.820	31.9	18.7	50.6	88.2	-37.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11102.500	31.9	15.9	47.8	74.0	-26.2	Peak	Horizontal
	12448.090	32.3	15.7	48.0	74.0	-26.0	Peak	Horizontal
*	14132.400	31.4	19.0	50.4	88.2	-37.8	Peak	Horizontal
*	14948.850	33.4	18.4	51.8	88.2	-36.4	Peak	Horizontal
	11235.960	31.0	16.3	47.3	74.0	-26.7	Peak	Vertical
	11888.770	32.6	16.3	48.9	74.0	-25.1	Peak	Vertical
*	14190.210	31.3	18.7	50.0	88.2	-38.2	Peak	Vertical
*	14945.450	31.8	18.5	50.3	88.2	-37.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11411.490	31.0	16.6	47.6	74.0	-26.4	Peak	Horizontal
	11938.500	31.4	15.9	47.3	74.0	-26.7	Peak	Horizontal
*	13974.300	31.3	18.6	49.9	88.2	-38.3	Peak	Horizontal
*	14928.870	31.5	18.6	50.1	88.2	-38.1	Peak	Horizontal
	11080.400	32.8	15.9	48.7	74.0	-25.3	Peak	Vertical
	11501.160	31.8	16.4	48.2	74.0	-25.8	Peak	Vertical
*	14021.480	30.6	18.7	49.3	88.2	-38.9	Peak	Vertical
*	14882.550	32.3	17.9	50.2	88.2	-38.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11002.630	32.0	15.8	47.8	74.0	-26.2	Peak	Horizontal
	11714.940	31.6	16.8	48.4	74.0	-25.6	Peak	Horizontal
*	13873.150	30.7	18.6	49.3	88.2	-38.9	Peak	Horizontal
*	14936.100	32.3	18.7	51.0	88.2	-37.2	Peak	Horizontal
	11123.330	32.1	15.7	47.8	74.0	-26.2	Peak	Vertical
	11983.550	32.1	16.0	48.1	74.0	-25.9	Peak	Vertical
*	14187.650	31.6	18.7	50.3	88.2	-37.9	Peak	Vertical
*	14930.570	31.3	18.6	49.9	88.2	-38.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10972.020	31.9	15.4	47.3	74.0	-26.7	Peak	Horizontal
	11605.290	32.2	16.2	48.4	74.0	-25.6	Peak	Horizontal
*	14219.110	32.7	18.6	51.3	88.2	-36.9	Peak	Horizontal
*	14956.920	32.2	18.0	50.2	88.2	-38.0	Peak	Horizontal
	11040.030	31.4	15.5	46.9	74.0	-27.1	Peak	Vertical
	11636.320	31.1	16.8	47.9	74.0	-26.1	Peak	Vertical
*	14181.700	31.5	18.6	50.1	88.2	-38.1	Peak	Vertical
*	14985.820	32.8	17.8	50.6	88.2	-37.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11080.400	31.8	15.9	47.7	74.0	-26.3	Peak	Horizontal
	11641.420	30.6	16.9	47.5	74.0	-26.5	Peak	Horizontal
*	14055.480	30.7	18.7	49.4	88.2	-38.8	Peak	Horizontal
*	14922.070	31.7	18.6	50.3	88.2	-37.9	Peak	Horizontal
	10932.920	31.0	15.7	46.7	74.0	-27.3	Peak	Vertical
	11634.620	32.0	16.8	48.8	74.0	-25.2	Peak	Vertical
*	13908.420	31.6	18.0	49.6	88.2	-38.6	Peak	Vertical
*	14939.500	31.1	18.7	49.8	88.2	-38.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10994.970	31.5	15.7	47.2	74.0	-26.8	Peak	Horizontal
	11619.740	31.3	16.5	47.8	74.0	-26.2	Peak	Horizontal
*	14126.880	32.2	18.8	51.0	88.2	-37.2	Peak	Horizontal
*	14946.300	31.4	18.5	49.9	88.2	-38.3	Peak	Horizontal
	11375.360	31.6	16.4	48.0	74.0	-26.0	Peak	Vertical
	11933.820	32.8	15.9	48.7	74.0	-25.3	Peak	Vertical
*	13981.950	31.3	18.4	49.7	88.2	-38.5	Peak	Vertical
*	14804.340	32.2	18.0	50.2	88.2	-38.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11103.780	31.6	15.9	47.5	74.0	-26.5	Peak	Horizontal
	11804.620	31.1	16.7	47.8	74.0	-26.2	Peak	Horizontal
*	14160.030	31.3	18.6	49.9	88.2	-38.3	Peak	Horizontal
*	14933.550	31.6	18.7	50.3	88.2	-37.9	Peak	Horizontal
	11065.950	31.3	15.5	46.8	74.0	-27.2	Peak	Vertical
	11541.540	31.1	16.5	47.6	74.0	-26.4	Peak	Vertical
*	13969.620	31.2	18.7	49.9	88.2	-38.3	Peak	Vertical
*	14949.700	32.1	18.3	50.4	88.2	-37.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10742.940	32.3	14.9	47.2	74.0	-26.8	Peak	Horizontal
	11453.560	31.6	16.3	47.9	74.0	-26.1	Peak	Horizontal
*	13973.450	31.7	18.6	50.3	88.2	-37.9	Peak	Horizontal
*	14863.000	32.3	18.4	50.7	88.2	-37.5	Peak	Horizontal
	10939.300	31.8	15.6	47.4	74.0	-26.6	Peak	Vertical
	11642.270	31.1	16.9	48.0	74.0	-26.0	Peak	Vertical
*	14012.980	31.1	18.5	49.6	88.2	-38.6	Peak	Vertical
*	15016.430	32.5	18.1	50.6	88.2	-37.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11466.740	31.5	16.5	48.0	74.0	-26.0	Peak	Horizontal
	12133.580	31.8	16.3	48.1	74.0	-25.9	Peak	Horizontal
*	13956.870	31.6	18.7	50.3	88.2	-37.9	Peak	Horizontal
*	14932.270	32.0	18.7	50.7	88.2	-37.5	Peak	Horizontal
	11242.760	31.6	16.4	48.0	74.0	-26.0	Peak	Vertical
	12198.600	31.6	16.5	48.1	74.0	-25.9	Peak	Vertical
*	14024.880	31.8	18.7	50.5	88.2	-37.7	Peak	Vertical
*	14777.990	33.2	18.4	51.6	88.2	-36.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11525.390	31.3	16.2	47.5	74.0	-26.5	Peak	Horizontal
	12316.330	31.3	16.2	47.5	74.0	-26.5	Peak	Horizontal
*	14088.200	31.6	18.4	50.0	88.2	-38.2	Peak	Horizontal
*	14850.250	32.2	18.6	50.8	88.2	-37.4	Peak	Horizontal
	10998.380	31.3	15.7	47.0	74.0	-27.0	Peak	Vertical
	11741.720	31.2	16.6	47.8	74.0	-26.2	Peak	Vertical
*	14026.580	30.9	18.7	49.6	88.2	-38.6	Peak	Vertical
*	14916.120	32.2	18.4	50.6	88.2	-37.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11111.000	31.7	15.8	47.5	74.0	-26.5	Peak	Horizontal
	11510.940	32.0	16.3	48.3	74.0	-25.7	Peak	Horizontal
*	13977.700	31.8	18.5	50.3	88.2	-37.9	Peak	Horizontal
*	14999.000	32.3	18.0	50.3	88.2	-37.9	Peak	Horizontal
	11096.980	31.7	15.9	47.6	74.0	-26.4	Peak	Vertical
	11492.240	31.7	16.6	48.3	74.0	-25.7	Peak	Vertical
*	14136.650	31.3	19.0	50.3	88.2	-37.9	Peak	Vertical
*	14925.900	32.8	18.6	51.4	88.2	-36.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11061.280	32.1	15.5	47.6	74.0	-26.4	Peak	Horizontal
	12323.130	32.1	16.1	48.2	74.0	-25.8	Peak	Horizontal
*	14021.480	31.8	18.7	50.5	88.2	-37.7	Peak	Horizontal
*	14971.800	32.6	17.8	50.4	88.2	-37.8	Peak	Horizontal
	11728.120	31.6	16.8	48.4	74.0	-25.6	Peak	Vertical
	11986.100	34.4	16.0	50.4	74.0	-23.6	Peak	Vertical
*	14006.600	32.4	18.3	50.7	88.2	-37.5	Peak	Vertical
*	15008.780	31.8	18.2	50.0	88.2	-38.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11559.810	31.3	16.7	48.0	74.0	-26.0	Peak	Horizontal
	12398.790	32.7	15.9	48.6	74.0	-25.4	Peak	Horizontal
*	14047.830	31.0	18.8	49.8	88.2	-38.4	Peak	Horizontal
*	14851.950	31.9	18.6	50.5	88.2	-37.7	Peak	Horizontal
	10894.670	32.7	15.4	48.1	74.0	-25.9	Peak	Vertical
	12093.200	32.1	16.0	48.1	74.0	-25.9	Peak	Vertical
*	13946.250	30.7	18.6	49.3	88.2	-38.9	Peak	Vertical
*	14966.700	32.5	17.9	50.4	88.2	-37.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11045.980	32.4	15.4	47.8	74.0	-26.2	Peak	Horizontal
	11701.770	31.3	16.5	47.8	74.0	-26.2	Peak	Horizontal
*	14053.780	32.0	18.7	50.7	88.2	-37.5	Peak	Horizontal
*	14917.400	31.8	18.4	50.2	88.2	-38.0	Peak	Horizontal
	11096.980	32.2	15.9	48.1	74.0	-25.9	Peak	Vertical
	12249.610	32.3	16.2	48.5	74.0	-25.5	Peak	Vertical
*	13959.000	31.2	18.7	49.9	88.2	-38.3	Peak	Vertical
*	14929.300	31.4	18.6	50.0	88.2	-38.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11105.900	33.1	15.8	48.9	74.0	-25.1	Peak	Horizontal
	11721.740	31.3	16.8	48.1	74.0	-25.9	Peak	Horizontal
*	14038.480	31.9	18.8	50.7	88.2	-37.5	Peak	Horizontal
*	14830.700	31.5	18.6	50.1	88.2	-38.1	Peak	Horizontal
	11241.060	32.4	16.3	48.7	74.0	-25.3	Peak	Vertical
	11715.370	30.8	16.8	47.6	74.0	-26.4	Peak	Vertical
*	14229.730	32.1	18.6	50.7	88.2	-37.5	Peak	Vertical
*	14942.050	32.0	18.6	50.6	88.2	-37.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11187.080	31.8	16.0	47.8	74.0	-26.2	Peak	Horizontal
	11965.270	32.3	16.0	48.3	74.0	-25.7	Peak	Horizontal
*	13963.250	31.4	18.7	50.1	88.2	-38.1	Peak	Horizontal
*	14928.450	31.7	18.6	50.3	88.2	-37.9	Peak	Horizontal
	11079.130	31.9	15.8	47.7	74.0	-26.3	Peak	Vertical
	11762.540	31.4	16.2	47.6	74.0	-26.4	Peak	Vertical
*	14064.830	31.4	18.5	49.9	88.2	-38.3	Peak	Vertical
*	14945.870	32.6	18.5	51.1	88.2	-37.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11453.140	31.4	16.3	47.7	74.0	-26.3	Peak	Horizontal
	12277.230	31.6	16.3	47.9	74.0	-26.1	Peak	Horizontal
*	14140.480	30.9	19.1	50.0	88.2	-38.2	Peak	Horizontal
*	14868.520	32.7	18.3	51.0	88.2	-37.2	Peak	Horizontal
	11492.660	31.7	16.6	48.3	74.0	-25.7	Peak	Vertical
	12226.660	32.3	16.3	48.6	74.0	-25.4	Peak	Vertical
*	13930.520	31.9	18.3	50.2	88.2	-38.0	Peak	Vertical
*	15007.920	32.9	18.2	51.1	88.2	-37.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10953.320	32.4	15.4	47.8	74.0	-26.2	Peak	Horizontal
	11629.940	31.5	16.7	48.2	74.0	-25.8	Peak	Horizontal
*	14103.080	31.3	18.6	49.9	88.2	-38.3	Peak	Horizontal
*	14698.520	32.7	18.6	51.3	88.2	-36.9	Peak	Horizontal
	10909.970	32.8	15.6	48.4	74.0	-25.6	Peak	Vertical
	12002.670	33.0	15.9	48.9	74.0	-25.1	Peak	Vertical
*	13951.770	31.2	18.7	49.9	88.2	-38.3	Peak	Vertical
*	14939.500	31.7	18.7	50.4	88.2	-37.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11188.780	31.5	16.0	47.5	74.0	-26.5	Peak	Horizontal
	11683.070	32.0	16.3	48.3	74.0	-25.7	Peak	Horizontal
*	13928.400	32.4	18.3	50.7	88.2	-37.5	Peak	Horizontal
*	14867.670	32.9	18.3	51.2	88.2	-37.0	Peak	Horizontal
	11016.650	31.6	15.7	47.3	74.0	-26.7	Peak	Vertical
	11654.170	31.7	16.8	48.5	74.0	-25.5	Peak	Vertical
*	13958.150	31.8	18.7	50.5	88.2	-37.7	Peak	Vertical
*	14922.920	31.9	18.6	50.5	88.2	-37.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11026.430	32.3	15.6	47.9	74.0	-26.1	Peak	Horizontal
	11561.090	31.9	16.7	48.6	74.0	-25.4	Peak	Horizontal
*	14033.800	31.6	18.8	50.4	88.2	-37.8	Peak	Horizontal
*	14904.650	32.9	18.1	51.0	88.2	-37.2	Peak	Horizontal
	11244.030	31.3	16.4	47.7	74.0	-26.3	Peak	Vertical
	12334.180	32.4	16.0	48.4	74.0	-25.6	Peak	Vertical
*	13951.350	31.8	18.7	50.5	88.2	-37.7	Peak	Vertical
*	14933.550	33.0	18.7	51.7	88.2	-36.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10997.950	31.5	15.7	47.2	74.0	-26.8	Peak	Horizontal
	11568.740	31.4	16.6	48.0	74.0	-26.0	Peak	Horizontal
*	14318.560	32.8	18.7	51.5	88.2	-36.7	Peak	Horizontal
*	14910.170	32.9	18.2	51.1	88.2	-37.1	Peak	Horizontal
	11095.280	31.1	15.9	47.0	74.0	-27.0	Peak	Vertical
	11646.940	30.8	16.9	47.7	74.0	-26.3	Peak	Vertical
*	14051.230	31.3	18.7	50.0	88.2	-38.2	Peak	Vertical
*	14844.720	31.7	18.7	50.4	88.2	-37.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11062.130	31.8	15.5	47.3	74.0	-26.7	Peak	Horizontal
	11561.510	31.2	16.7	47.9	74.0	-26.1	Peak	Horizontal
*	14142.180	30.8	19.0	49.8	88.2	-38.4	Peak	Horizontal
*	14874.050	31.8	18.1	49.9	88.2	-38.3	Peak	Horizontal
	11100.380	31.8	15.9	47.7	74.0	-26.3	Peak	Vertical
	11915.970	28.4	16.1	44.5	54.0	-9.5	Average	Vertical
	11915.970	36.8	16.1	52.9	74.0	-21.1	Peak	Vertical
*	14054.630	31.0	18.7	49.7	88.2	-38.5	Peak	Vertical
*	14939.920	33.2	18.7	51.9	88.2	-36.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10979.000	32.3	15.5	47.8	74.0	-26.2	Peak	Horizontal
	12143.500	31.9	16.3	48.2	74.0	-25.8	Peak	Horizontal
*	13059.800	32.4	17.0	49.4	88.2	-38.8	Peak	Horizontal
*	14069.600	31.2	18.4	49.6	88.2	-38.6	Peak	Horizontal
	11031.700	32.0	15.5	47.5	74.0	-26.5	Peak	Vertical
	11511.100	31.7	16.3	48.0	74.0	-26.0	Peak	Vertical
*	14125.700	30.8	18.8	49.6	88.2	-38.6	Peak	Vertical
*	14815.900	32.6	18.2	50.8	88.2	-37.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11485.600	31.7	16.7	48.4	74.0	-25.6	Peak	Horizontal
	11798.400	32.1	16.7	48.8	74.0	-25.2	Peak	Horizontal
*	14090.000	31.3	18.4	49.7	88.2	-38.5	Peak	Horizontal
*	14953.600	32.6	18.2	50.8	88.2	-37.4	Peak	Horizontal
	10684.900	32.9	14.8	47.7	74.0	-26.3	Peak	Vertical
	11504.300	31.6	16.4	48.0	74.0	-26.0	Peak	Vertical
*	14042.400	31.9	18.8	50.7	88.2	-37.5	Peak	Vertical
*	14807.400	32.3	18.1	50.4	88.2	-37.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11033.400	31.6	15.5	47.1	74.0	-26.9	Peak	Horizontal
	11596.100	31.5	16.2	47.7	74.0	-26.3	Peak	Horizontal
*	13947.200	31.4	18.6	50.0	88.2	-38.2	Peak	Horizontal
*	14923.000	31.4	18.6	50.0	88.2	-38.2	Peak	Horizontal
	11070.800	31.7	15.7	47.4	74.0	-26.6	Peak	Vertical
	11645.400	31.0	16.9	47.9	74.0	-26.1	Peak	Vertical
*	14124.000	31.5	18.8	50.3	88.2	-37.9	Peak	Vertical
*	14950.200	32.1	18.3	50.4	88.2	-37.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11041.900	31.8	15.4	47.2	74.0	-26.8	Peak	Horizontal
	11463.500	32.3	16.5	48.8	74.0	-25.2	Peak	Horizontal
*	14115.500	32.0	18.7	50.7	88.2	-37.5	Peak	Horizontal
*	14934.900	31.9	18.7	50.6	88.2	-37.6	Peak	Horizontal
	11329.200	30.9	16.5	47.4	74.0	-26.6	Peak	Vertical
	12160.500	31.3	16.3	47.6	74.0	-26.4	Peak	Vertical
*	13848.600	32.0	18.2	50.2	88.2	-38.0	Peak	Vertical
*	14793.800	32.3	18.2	50.5	88.2	-37.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11075.900	32.6	15.8	48.4	74.0	-25.6	Peak	Horizontal
	12145.200	31.5	16.3	47.8	74.0	-26.2	Peak	Horizontal
*	14045.800	31.7	18.8	50.5	88.2	-37.7	Peak	Horizontal
*	14934.900	31.2	18.7	49.9	88.2	-38.3	Peak	Horizontal
	11475.400	31.9	16.6	48.5	74.0	-25.5	Peak	Vertical
	11963.300	31.6	16.0	47.6	74.0	-26.4	Peak	Vertical
*	14096.800	31.6	18.5	50.1	88.2	-38.1	Peak	Vertical
*	14938.300	31.8	18.7	50.5	88.2	-37.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11094.600	31.3	15.9	47.2	74.0	-26.8	Peak	Horizontal
	11482.200	31.4	16.7	48.1	74.0	-25.9	Peak	Horizontal
*	13994.800	31.7	18.2	49.9	88.2	-38.3	Peak	Horizontal
*	14938.300	32.1	18.7	50.8	88.2	-37.4	Peak	Horizontal
	11101.400	31.6	15.9	47.5	74.0	-26.5	Peak	Vertical
	11934.400	29.0	15.9	44.9	54.0	-9.1	Average	Vertical
	11934.400	36.1	15.9	52.0	74.0	-22.0	Peak	Vertical
*	14059.400	31.4	18.6	50.0	88.2	-38.2	Peak	Vertical
*	14929.800	32.3	18.6	50.9	88.2	-37.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11098.000	31.8	16.0	47.8	74.0	-26.2	Peak	Horizontal
	11587.600	31.8	16.2	48.0	74.0	-26.0	Peak	Horizontal
*	14118.900	31.1	18.7	49.8	88.2	-38.4	Peak	Horizontal
*	14921.300	32.4	18.5	50.9	88.2	-37.3	Peak	Horizontal
	11640.300	31.2	16.9	48.1	74.0	-25.9	Peak	Vertical
	12410.400	33.2	15.8	49.0	74.0	-25.0	Peak	Vertical
*	13952.300	31.6	18.7	50.3	88.2	-37.9	Peak	Vertical
*	14836.300	32.0	18.8	50.8	88.2	-37.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11247.600	32.3	16.4	48.7	74.0	-25.3	Peak	Horizontal
	11813.700	31.6	16.7	48.3	74.0	-25.7	Peak	Horizontal
*	14203.900	31.8	18.7	50.5	88.2	-37.7	Peak	Horizontal
*	14809.100	32.7	18.1	50.8	88.2	-37.4	Peak	Horizontal
	11041.900	32.1	15.4	47.5	74.0	-26.5	Peak	Vertical
	11630.100	31.0	16.7	47.7	74.0	-26.3	Peak	Vertical
*	13940.400	31.3	18.6	49.9	88.2	-38.3	Peak	Vertical
*	14926.400	31.7	18.6	50.3	88.2	-37.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11387.000	31.3	16.5	47.8	74.0	-26.2	Peak	Horizontal
	11995.600	32.4	15.9	48.3	74.0	-25.7	Peak	Horizontal
*	13960.800	31.7	18.7	50.4	88.2	-37.8	Peak	Horizontal
*	15002.900	32.2	18.1	50.3	88.2	-37.9	Peak	Horizontal
	11069.100	31.1	15.6	46.7	74.0	-27.3	Peak	Vertical
	11553.600	31.1	16.7	47.8	74.0	-26.2	Peak	Vertical
*	13962.500	30.9	18.7	49.6	88.2	-38.6	Peak	Vertical
*	15052.200	32.5	17.3	49.8	88.2	-38.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11031.700	31.9	15.5	47.4	74.0	-26.6	Peak	Horizontal
	11565.500	31.4	16.6	48.0	74.0	-26.0	Peak	Horizontal
*	14030.500	31.1	18.8	49.9	88.2	-38.3	Peak	Horizontal
*	14940.000	31.6	18.7	50.3	88.2	-37.9	Peak	Horizontal
	11081.000	31.8	15.9	47.7	74.0	-26.3	Peak	Vertical
	12099.300	31.4	16.1	47.5	74.0	-26.5	Peak	Vertical
*	14083.200	32.2	18.4	50.6	88.2	-37.6	Peak	Vertical
*	14926.400	31.9	18.6	50.5	88.2	-37.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11327.500	30.8	16.5	47.3	74.0	-26.7	Peak	Horizontal
	12235.300	31.3	16.3	47.6	74.0	-26.4	Peak	Horizontal
*	14146.100	31.1	18.9	50.0	88.2	-38.2	Peak	Horizontal
*	14875.400	31.9	18.1	50.0	88.2	-38.2	Peak	Horizontal
	10985.800	31.7	15.6	47.3	74.0	-26.7	Peak	Vertical
	12211.500	31.8	16.5	48.3	74.0	-25.7	Peak	Vertical
*	14137.600	30.8	19.0	49.8	88.2	-38.4	Peak	Vertical
*	14865.200	31.7	18.3	50.0	88.2	-38.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11115.000	31.8	15.7	47.5	74.0	-26.5	Peak	Horizontal
	11623.300	32.4	16.6	49.0	74.0	-25.0	Peak	Horizontal
*	14135.900	31.3	19.0	50.3	88.2	-37.9	Peak	Horizontal
*	14928.100	31.8	18.6	50.4	88.2	-37.8	Peak	Horizontal
	11499.200	32.1	16.5	48.6	74.0	-25.4	Peak	Vertical
	11990.500	34.6	16.0	50.6	74.0	-23.4	Peak	Vertical
*	14037.300	31.1	18.8	49.9	88.2	-38.3	Peak	Vertical
*	14836.300	32.8	18.8	51.6	88.2	-36.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11086.100	32.6	15.9	48.5	74.0	-25.5	Peak	Horizontal
	11759.300	31.6	16.2	47.8	74.0	-26.2	Peak	Horizontal
*	14127.400	31.7	18.8	50.5	88.2	-37.7	Peak	Horizontal
*	14875.400	31.9	18.1	50.0	88.2	-38.2	Peak	Horizontal
	11094.600	32.2	15.9	48.1	74.0	-25.9	Peak	Vertical
	11555.300	31.2	16.7	47.9	74.0	-26.1	Peak	Vertical
*	14120.600	30.8	18.7	49.5	88.2	-38.7	Peak	Vertical
*	14858.400	32.0	18.5	50.5	88.2	-37.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11475.400	31.1	16.6	47.7	74.0	-26.3	Peak	Horizontal
	12250.600	31.3	16.2	47.5	74.0	-26.5	Peak	Horizontal
*	13947.200	30.8	18.6	49.4	88.2	-38.8	Peak	Horizontal
*	14940.000	32.0	18.7	50.7	88.2	-37.5	Peak	Horizontal
	11072.500	31.9	15.7	47.6	74.0	-26.4	Peak	Vertical
	11810.300	30.6	16.7	47.3	74.0	-26.7	Peak	Vertical
*	14105.300	31.8	18.6	50.4	88.2	-37.8	Peak	Vertical
*	14965.500	32.3	17.9	50.2	88.2	-38.0	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11494.100	31.0	16.6	47.6	74.0	-26.4	Peak	Horizontal
	12294.800	31.6	16.4	48.0	74.0	-26.0	Peak	Horizontal
*	14110.400	31.1	18.6	49.7	88.2	-38.5	Peak	Horizontal
*	14926.400	31.9	18.6	50.5	88.2	-37.7	Peak	Horizontal
	11404.000	31.5	16.6	48.1	74.0	-25.9	Peak	Vertical
	11827.300	32.1	16.6	48.7	74.0	-25.3	Peak	Vertical
*	13869.000	31.8	18.6	50.4	88.2	-37.8	Peak	Vertical
*	15008.000	32.1	18.2	50.3	88.2	-37.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11334.300	31.7	16.5	48.2	74.0	-25.8	Peak	Horizontal
	12366.200	32.3	16.0	48.3	74.0	-25.7	Peak	Horizontal
*	14093.400	31.8	18.4	50.2	88.2	-38.0	Peak	Horizontal
*	14931.500	33.0	18.7	51.7	88.2	-36.5	Peak	Horizontal
	11478.800	30.8	16.6	47.4	74.0	-26.6	Peak	Vertical
	12209.800	31.3	16.5	47.8	74.0	-26.2	Peak	Vertical
*	14124.000	31.1	18.8	49.9	88.2	-38.3	Peak	Vertical
*	14878.800	32.0	18.0	50.0	88.2	-38.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11557.000	31.3	16.7	48.0	74.0	-26.0	Peak	Horizontal
	12400.200	32.3	15.9	48.2	74.0	-25.8	Peak	Horizontal
*	13969.300	31.5	18.7	50.2	88.2	-38.0	Peak	Horizontal
*	14766.600	31.7	18.4	50.1	88.2	-38.1	Peak	Horizontal
	11069.100	32.3	15.6	47.9	74.0	-26.1	Peak	Vertical
	11546.800	31.9	16.6	48.5	74.0	-25.5	Peak	Vertical
*	14076.400	31.9	18.4	50.3	88.2	-37.9	Peak	Vertical
*	14889.000	32.4	17.7	50.1	88.2	-38.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11245.900	31.5	16.4	47.9	74.0	-26.1	Peak	Horizontal
	12138.400	32.3	16.3	48.6	74.0	-25.4	Peak	Horizontal
*	14037.300	31.7	18.8	50.5	88.2	-37.7	Peak	Horizontal
*	14877.100	33.6	18.1	51.7	88.2	-36.5	Peak	Horizontal
	11300.300	31.9	16.2	48.1	74.0	-25.9	Peak	Vertical
	11970.100	33.4	16.0	49.4	74.0	-24.6	Peak	Vertical
*	14044.100	31.9	18.8	50.7	88.2	-37.5	Peak	Vertical
*	14945.100	32.7	18.5	51.2	88.2	-37.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11402.300	31.8	16.6	48.4	74.0	-25.6	Peak	Horizontal
	12306.700	31.3	16.3	47.6	74.0	-26.4	Peak	Horizontal
*	13969.300	31.6	18.7	50.3	88.2	-37.9	Peak	Horizontal
*	14934.900	31.9	18.7	50.6	88.2	-37.6	Peak	Horizontal
	11130.300	32.2	15.7	47.9	74.0	-26.1	Peak	Vertical
	12354.300	31.7	16.0	47.7	74.0	-26.3	Peak	Vertical
*	14032.200	31.0	18.8	49.8	88.2	-38.4	Peak	Vertical
*	14957.000	32.9	18.0	50.9	88.2	-37.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11115.000	32.1	15.7	47.8	74.0	-26.2	Peak	Horizontal
	11555.300	31.4	16.7	48.1	74.0	-25.9	Peak	Horizontal
*	13945.500	31.4	18.6	50.0	88.2	-38.2	Peak	Horizontal
*	14938.300	32.5	18.7	51.2	88.2	-37.0	Peak	Horizontal
	11065.700	32.2	15.5	47.7	74.0	-26.3	Peak	Vertical
	12201.300	31.0	16.5	47.5	74.0	-26.5	Peak	Vertical
*	14146.100	31.5	18.9	50.4	88.2	-37.8	Peak	Vertical
*	14783.600	31.6	18.3	49.9	88.2	-38.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11504.300	31.6	16.4	48.0	74.0	-26.0	Peak	Horizontal
	12077.200	30.8	16.0	46.8	74.0	-27.2	Peak	Horizontal
*	13972.700	32.1	18.7	50.8	88.2	-37.4	Peak	Horizontal
*	14948.500	31.7	18.4	50.1	88.2	-38.1	Peak	Horizontal
	11325.800	31.0	16.5	47.5	74.0	-26.5	Peak	Vertical
	11942.900	31.5	16.0	47.5	74.0	-26.5	Peak	Vertical
*	13976.100	31.8	18.6	50.4	88.2	-37.8	Peak	Vertical
*	14838.000	31.9	18.8	50.7	88.2	-37.5	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT320	Test Channel	31
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10950.100	31.3	15.5	46.8	74.0	-27.2	Peak	Horizontal
	11565.500	30.9	16.6	47.5	74.0	-26.5	Peak	Horizontal
*	14064.500	31.3	18.5	49.8	88.2	-38.4	Peak	Horizontal
*	14822.700	31.8	18.4	50.2	88.2	-38.0	Peak	Horizontal
	11421.000	30.4	16.5	46.9	74.0	-27.1	Peak	Vertical
	12162.200	31.2	16.3	47.5	74.0	-26.5	Peak	Vertical
*	14042.400	31.0	18.8	49.8	88.2	-38.4	Peak	Vertical
*	14836.300	31.2	18.8	50.0	88.2	-38.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Dick Shen
Test Site	WZ-AC2	Test Date	2024-10-11
Test Mode	802.11be-EHT320	Test Channel	63
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11453.300	30.9	16.3	47.2	74.0	-26.8	Peak	Horizontal
	12174.100	31.2	16.3	47.5	74.0	-26.5	Peak	Horizontal
*	12864.300	32.3	16.7	49.0	88.2	-39.2	Peak	Horizontal
*	14066.200	31.6	18.5	50.1	88.2	-38.1	Peak	Horizontal
*	10282.000	33.6	13.9	47.5	88.2	-40.7	Peak	Vertical
	11395.500	30.8	16.6	47.4	74.0	-26.6	Peak	Vertical
	11742.300	31.6	16.5	48.1	74.0	-25.9	Peak	Vertical
*	13959.100	31.4	18.7	50.1	88.2	-38.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Antenna_312:

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10341.500	35.5	14.6	50.1	88.2	-38.1	Peak	Horizontal
	11266.300	36.5	14.7	51.2	74.0	-22.8	Peak	Horizontal
	11910.600	34.4	13.4	47.8	54.0	-6.2	Average	Horizontal
	11910.600	41.7	13.4	55.1	74.0	-18.9	Peak	Horizontal
*	14181.800	36.5	16.1	52.6	88.2	-35.6	Peak	Horizontal
*	9814.500	34.9	14.6	49.5	88.2	-38.7	Peak	Vertical
	11480.500	36.0	14.7	50.7	74.0	-23.3	Peak	Vertical
	11941.200	37.1	13.6	50.7	74.0	-23.3	Peak	Vertical
*	14142.700	36.9	15.6	52.5	88.2	-35.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11540.000	36.8	14.7	51.5	74.0	-22.5	Peak	Horizontal
	12374.700	37.0	13.1	50.1	74.0	-23.9	Peak	Horizontal
*	14358.600	35.5	16.6	52.1	88.2	-36.1	Peak	Horizontal
*	14894.100	36.2	16.0	52.2	88.2	-36.0	Peak	Horizontal
*	9828.100	35.4	14.6	50.0	88.2	-38.2	Peak	Vertical
	10861.700	34.8	15.3	50.1	74.0	-23.9	Peak	Vertical
	11574.000	36.1	14.3	50.4	74.0	-23.6	Peak	Vertical
*	14195.400	35.9	16.3	52.2	88.2	-36.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9889.300	35.7	14.0	49.7	88.2	-38.5	Peak	Horizontal
	11050.400	35.6	15.1	50.7	74.0	-23.3	Peak	Horizontal
	11494.100	36.4	14.7	51.1	74.0	-22.9	Peak	Horizontal
*	14679.900	36.2	16.4	52.6	88.2	-35.6	Peak	Horizontal
*	9680.200	35.4	13.9	49.3	88.2	-38.9	Peak	Vertical
	11108.200	35.6	14.9	50.5	74.0	-23.5	Peak	Vertical
	11524.700	35.1	14.7	49.8	74.0	-24.2	Peak	Vertical
*	13916.600	36.0	15.5	51.5	88.2	-36.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9821.300	34.8	14.7	49.5	88.2	-38.7	Peak	Horizontal
	11276.500	35.9	14.7	50.6	74.0	-23.4	Peak	Horizontal
*	13989.700	35.4	15.6	51.0	88.2	-37.2	Peak	Horizontal
	14474.200	35.5	16.5	52.0	74.0	-22.0	Peak	Horizontal
	10955.200	35.0	15.2	50.2	74.0	-23.8	Peak	Vertical
	11942.900	36.8	13.5	50.3	74.0	-23.7	Peak	Vertical
*	13789.100	36.0	14.8	50.8	88.2	-37.4	Peak	Vertical
*	14526.900	34.9	16.6	51.5	88.2	-36.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9782.200	35.8	14.0	49.8	88.2	-38.4	Peak	Horizontal
	11375.100	35.5	14.8	50.3	74.0	-23.7	Peak	Horizontal
	14486.100	35.6	16.6	52.2	74.0	-21.8	Peak	Horizontal
*	14866.900	35.9	16.3	52.2	88.2	-36.0	Peak	Horizontal
*	9811.100	34.7	14.5	49.2	88.2	-39.0	Peak	Vertical
	10989.200	34.6	15.4	50.0	74.0	-24.0	Peak	Vertical
	11591.000	35.3	14.6	49.9	74.0	-24.1	Peak	Vertical
*	14246.400	35.1	16.6	51.7	88.2	-36.5	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9823.000	34.4	14.7	49.1	88.2	-39.1	Peak	Horizontal
	10610.100	34.5	15.2	49.7	74.0	-24.3	Peak	Horizontal
	11089.500	35.5	14.9	50.4	74.0	-23.6	Peak	Horizontal
*	13804.400	35.8	15.0	50.8	88.2	-37.4	Peak	Horizontal
*	9692.100	36.0	13.9	49.9	88.2	-38.3	Peak	Vertical
	11495.800	35.5	14.7	50.2	74.0	-23.8	Peak	Vertical
	13304.600	35.8	13.8	49.6	74.0	-24.4	Peak	Vertical
*	14112.100	35.3	15.9	51.2	88.2	-37.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	9433.700	35.8	13.5	49.3	74.0	-24.7	Peak	Horizontal
*	10137.500	35.8	14.1	49.9	88.2	-38.3	Peak	Horizontal
*	10599.900	36.1	15.2	51.3	88.2	-36.9	Peak	Horizontal
	11087.800	34.9	14.9	49.8	74.0	-24.2	Peak	Horizontal
	9457.500	35.9	13.5	49.4	74.0	-24.6	Peak	Vertical
*	9675.100	36.4	13.9	50.3	88.2	-37.9	Peak	Vertical
	10841.300	36.4	15.2	51.6	74.0	-22.4	Peak	Vertical
*	14001.600	36.4	15.6	52.0	88.2	-36.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8277.700	37.2	9.9	47.1	74.0	-26.9	Peak	Horizontal
*	10234.400	35.0	14.2	49.2	88.2	-39.0	Peak	Horizontal
	10730.800	35.9	15.2	51.1	74.0	-22.9	Peak	Horizontal
*	14107.000	38.1	16.0	54.1	88.2	-34.1	Peak	Horizontal
	9365.700	35.0	13.6	48.6	74.0	-25.4	Peak	Vertical
*	10122.200	36.3	14.2	50.5	88.2	-37.7	Peak	Vertical
	11028.300	35.3	15.4	50.7	74.0	-23.3	Peak	Vertical
*	14549.000	36.0	16.4	52.4	88.2	-35.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9925.000	35.6	14.5	50.1	88.2	-38.1	Peak	Horizontal
	10865.100	35.6	15.3	50.9	74.0	-23.1	Peak	Horizontal
	12408.700	38.5	12.9	51.4	74.0	-22.6	Peak	Horizontal
*	14268.500	36.3	16.4	52.7	88.2	-35.5	Peak	Horizontal
	9358.900	35.4	13.5	48.9	74.0	-25.1	Peak	Vertical
*	10225.900	35.3	14.2	49.5	88.2	-38.7	Peak	Vertical
	10897.400	35.3	15.1	50.4	74.0	-23.6	Peak	Vertical
*	17024.200	35.8	16.2	52.0	88.2	-36.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	9403.100	36.0	13.5	49.5	74.0	-24.5	Peak	Horizontal
	11021.500	35.2	15.3	50.5	74.0	-23.5	Peak	Horizontal
*	14530.300	36.0	16.5	52.5	88.2	-35.7	Peak	Horizontal
*	17476.400	35.0	18.5	53.5	88.2	-34.7	Peak	Horizontal
	9455.800	35.5	13.5	49.0	74.0	-25.0	Peak	Vertical
	10909.300	35.3	15.3	50.6	74.0	-23.4	Peak	Vertical
*	14258.300	36.5	16.5	53.0	88.2	-35.2	Peak	Vertical
*	17127.900	33.9	16.2	50.1	88.2	-38.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8090.700	37.1	10.2	47.3	74.0	-26.7	Peak	Horizontal
	10900.800	35.1	15.1	50.2	74.0	-23.8	Peak	Horizontal
*	14368.800	36.6	16.6	53.2	88.2	-35.0	Peak	Horizontal
*	17478.100	35.5	18.5	54.0	88.2	-34.2	Peak	Horizontal
	8281.100	36.1	9.9	46.0	74.0	-28.0	Peak	Vertical
*	10113.700	36.0	14.1	50.1	88.2	-38.1	Peak	Vertical
	10848.100	34.9	15.2	50.1	74.0	-23.9	Peak	Vertical
*	14197.100	36.2	16.3	52.5	88.2	-35.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8265.800	36.9	10.0	46.9	74.0	-27.1	Peak	Horizontal
*	10117.100	35.6	14.1	49.7	88.2	-38.5	Peak	Horizontal
	10911.000	34.8	15.4	50.2	74.0	-23.8	Peak	Horizontal
*	13882.600	37.6	15.6	53.2	88.2	-35.0	Peak	Horizontal
	8221.600	35.9	10.0	45.9	74.0	-28.1	Peak	Vertical
*	9921.600	34.0	14.5	48.5	88.2	-39.7	Peak	Vertical
	11057.200	35.0	15.2	50.2	74.0	-23.8	Peak	Vertical
*	16940.900	35.9	16.1	52.0	88.2	-36.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8184.200	35.0	10.1	45.1	74.0	-28.9	Peak	Horizontal
	10841.300	34.8	15.2	50.0	74.0	-24.0	Peak	Horizontal
*	14098.500	34.1	16.0	50.1	88.2	-38.1	Peak	Horizontal
*	16976.600	33.9	15.8	49.7	88.2	-38.5	Peak	Horizontal
	8429.000	36.6	10.2	46.8	74.0	-27.2	Peak	Vertical
*	10205.500	35.3	14.3	49.6	88.2	-38.6	Peak	Vertical
	11021.500	34.7	15.3	50.0	74.0	-24.0	Peak	Vertical
*	16680.800	36.6	14.5	51.1	88.2	-37.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	9432.000	36.0	13.5	49.5	74.0	-24.5	Peak	Horizontal
*	10426.500	36.1	14.7	50.8	88.2	-37.4	Peak	Horizontal
	11988.800	38.4	13.5	51.9	74.0	-22.1	Peak	Horizontal
*	17189.100	35.6	16.1	51.7	88.2	-36.5	Peak	Horizontal
	8165.500	36.2	10.2	46.4	74.0	-27.6	Peak	Vertical
*	10270.100	34.9	14.5	49.4	88.2	-38.8	Peak	Vertical
	10929.700	34.5	15.4	49.9	74.0	-24.1	Peak	Vertical
*	17303.000	35.3	16.5	51.8	88.2	-36.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8038.000	35.9	10.3	46.2	74.0	-27.8	Peak	Horizontal
*	10156.200	35.1	14.0	49.1	88.2	-39.1	Peak	Horizontal
	10917.800	34.4	15.4	49.8	74.0	-24.2	Peak	Horizontal
*	17422.000	34.8	18.0	52.8	88.2	-35.4	Peak	Horizontal
	8032.900	36.8	10.3	47.1	74.0	-26.9	Peak	Vertical
	10795.400	34.7	15.2	49.9	74.0	-24.1	Peak	Vertical
*	14210.700	36.1	16.2	52.3	88.2	-35.9	Peak	Vertical
*	16935.800	35.1	16.0	51.1	88.2	-37.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8131.500	36.0	10.2	46.2	74.0	-27.8	Peak	Horizontal
*	9698.900	35.1	13.9	49.0	88.2	-39.2	Peak	Horizontal
	10945.000	34.3	15.3	49.6	74.0	-24.4	Peak	Horizontal
*	17173.800	34.4	16.4	50.8	88.2	-37.4	Peak	Horizontal
	9454.100	34.8	13.4	48.2	74.0	-25.8	Peak	Vertical
	10810.700	35.3	15.1	50.4	74.0	-23.6	Peak	Vertical
*	14863.500	35.8	16.3	52.1	88.2	-36.1	Peak	Vertical
*	17430.500	35.4	18.0	53.4	88.2	-34.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8269.200	36.2	10.0	46.2	74.0	-27.8	Peak	Horizontal
*	9814.500	34.8	14.6	49.4	88.2	-38.8	Peak	Horizontal
	10907.600	34.6	15.3	49.9	74.0	-24.1	Peak	Horizontal
*	14441.900	36.5	16.6	53.1	88.2	-35.1	Peak	Horizontal
	8039.700	36.3	10.3	46.6	74.0	-27.4	Peak	Vertical
*	10200.400	35.2	14.4	49.6	88.2	-38.6	Peak	Vertical
	10950.100	34.3	15.3	49.6	74.0	-24.4	Peak	Vertical
*	16940.900	35.2	16.1	51.3	88.2	-36.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8185.900	35.6	10.1	45.7	74.0	-28.3	Peak	Horizontal
*	9824.700	34.5	14.7	49.2	88.2	-39.0	Peak	Horizontal
	10868.500	34.5	15.3	49.8	74.0	-24.2	Peak	Horizontal
*	14164.800	35.7	15.9	51.6	88.2	-36.6	Peak	Horizontal
*	9823.000	35.0	14.7	49.7	88.2	-38.5	Peak	Vertical
	10849.800	34.4	15.2	49.6	74.0	-24.4	Peak	Vertical
	11659.000	35.4	14.2	49.6	74.0	-24.4	Peak	Vertical
*	17190.800	35.3	16.0	51.3	88.2	-36.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8226.700	36.2	10.0	46.2	74.0	-27.8	Peak	Horizontal
*	9858.700	34.6	14.3	48.9	88.2	-39.3	Peak	Horizontal
	10854.900	34.4	15.3	49.7	74.0	-24.3	Peak	Horizontal
*	14161.400	37.0	15.9	52.9	88.2	-35.3	Peak	Horizontal
	8099.200	36.4	10.1	46.5	74.0	-27.5	Peak	Vertical
*	9863.800	34.7	14.3	49.0	88.2	-39.2	Peak	Vertical
	10909.300	34.7	15.3	50.0	74.0	-24.0	Peak	Vertical
*	17029.300	33.9	16.2	50.1	88.2	-38.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8055.000	35.9	10.4	46.3	74.0	-27.7	Peak	Horizontal
*	10195.300	34.5	14.4	48.9	88.2	-39.3	Peak	Horizontal
	10861.700	34.5	15.3	49.8	74.0	-24.2	Peak	Horizontal
*	17466.200	35.7	18.4	54.1	88.2	-34.1	Peak	Horizontal
	7426.000	37.3	9.3	46.6	74.0	-27.4	Peak	Vertical
*	9925.000	34.7	14.5	49.2	88.2	-39.0	Peak	Vertical
	11123.500	35.4	14.8	50.2	74.0	-23.8	Peak	Vertical
*	14253.200	36.8	16.5	53.3	88.2	-34.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10385.700	35.3	14.7	50.0	88.2	-38.2	Peak	Horizontal
	10729.100	35.3	15.2	50.5	74.0	-23.5	Peak	Horizontal
	11074.200	34.8	15.0	49.8	74.0	-24.2	Peak	Horizontal
*	17182.300	35.9	16.2	52.1	88.2	-36.1	Peak	Horizontal
*	10078.000	36.3	13.9	50.2	88.2	-38.0	Peak	Vertical
	10963.700	34.5	15.2	49.7	74.0	-24.3	Peak	Vertical
	11936.100	36.8	13.6	50.4	74.0	-23.6	Peak	Vertical
*	14203.900	36.1	16.2	52.3	88.2	-35.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8060.100	36.1	10.4	46.5	74.0	-27.5	Peak	Horizontal
*	9916.500	34.5	14.4	48.9	88.2	-39.3	Peak	Horizontal
	10987.500	34.1	15.4	49.5	74.0	-24.5	Peak	Horizontal
*	17027.600	35.1	16.2	51.3	88.2	-36.9	Peak	Horizontal
	8272.600	36.3	9.9	46.2	74.0	-27.8	Peak	Vertical
*	9894.400	35.1	13.9	49.0	88.2	-39.2	Peak	Vertical
	10854.900	34.0	15.3	49.3	74.0	-24.7	Peak	Vertical
*	14081.500	36.2	15.7	51.9	88.2	-36.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8146.800	35.5	10.1	45.6	74.0	-28.4	Peak	Horizontal
*	10003.200	35.7	14.1	49.8	88.2	-38.4	Peak	Horizontal
	10905.900	34.7	15.2	49.9	74.0	-24.1	Peak	Horizontal
*	16925.600	35.6	15.8	51.4	88.2	-36.8	Peak	Horizontal
	8225.000	35.5	10.0	45.5	74.0	-28.5	Peak	Vertical
*	10042.300	34.6	14.0	48.6	88.2	-39.6	Peak	Vertical
	10849.800	34.8	15.2	50.0	74.0	-24.0	Peak	Vertical
*	17250.300	34.8	16.1	50.9	88.2	-37.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10022.800	32.8	12.9	45.7	88.2	-42.5	Peak	Horizontal
*	10259.130	32.9	13.6	46.5	88.2	-41.7	Peak	Horizontal
	11071.810	31.7	15.7	47.4	74.0	-26.6	Peak	Horizontal
	11904.890	33.8	16.3	50.1	54.0	-3.9	Average	Horizontal
	11904.890	41.6	16.3	57.9	74.0	-16.1	Peak	Vertical
*	9762.676	32.9	12.6	45.5	88.2	-42.7	Peak	Vertical
*	10187.720	33.1	13.4	46.5	88.2	-41.7	Peak	Vertical
	11143.210	31.7	15.9	47.6	74.0	-26.4	Peak	Vertical
	11921.890	34.9	16.0	50.9	74.0	-23.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8194.400	35.6	10.1	45.7	74.0	-28.3	Peak	Horizontal
*	9863.800	34.3	14.3	48.6	88.2	-39.6	Peak	Horizontal
	11070.800	35.1	15.1	50.2	74.0	-23.8	Peak	Horizontal
*	14601.700	35.9	16.6	52.5	88.2	-35.7	Peak	Horizontal
	8187.600	35.7	10.1	45.8	74.0	-28.2	Peak	Vertical
*	9913.100	34.9	14.4	49.3	88.2	-38.9	Peak	Vertical
	11074.200	34.8	15.0	49.8	74.0	-24.2	Peak	Vertical
*	14414.700	36.1	16.4	52.5	88.2	-35.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-05
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.600	36.3	10.1	46.4	74.0	-27.6	Peak	Horizontal
*	9785.600	35.9	13.9	49.8	88.2	-38.4	Peak	Horizontal
	11021.500	35.1	15.3	50.4	74.0	-23.6	Peak	Horizontal
*	16935.800	35.6	16.0	51.6	88.2	-36.6	Peak	Horizontal
	8051.600	37.3	10.3	47.6	74.0	-26.4	Peak	Vertical
*	9799.200	36.0	14.2	50.2	88.2	-38.0	Peak	Vertical
	10905.900	35.6	15.2	50.8	74.0	-23.2	Peak	Vertical
*	17126.200	36.3	16.2	52.5	88.2	-35.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-06
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8753.700	36.4	11.7	48.1	88.2	-40.1	Peak	Horizontal
	9352.100	35.4	13.5	48.9	74.0	-25.1	Peak	Horizontal
	10773.300	35.6	15.2	50.8	74.0	-23.2	Peak	Horizontal
*	14159.700	37.0	15.9	52.9	88.2	-35.3	Peak	Horizontal
	8174.000	35.9	10.2	46.1	74.0	-27.9	Peak	Vertical
*	10033.800	35.1	14.0	49.1	88.2	-39.1	Peak	Vertical
	11058.900	35.3	15.2	50.5	74.0	-23.5	Peak	Vertical
*	17214.600	35.8	16.2	52.0	88.2	-36.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-06
Test Mode	802.11be-EHT20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8155.300	35.5	10.1	45.6	74.0	-28.4	Peak	Horizontal
*	9296.000	34.9	13.4	48.3	88.2	-39.9	Peak	Horizontal
	10914.400	34.8	15.4	50.2	74.0	-23.8	Peak	Horizontal
*	17178.900	34.6	16.3	50.9	88.2	-37.3	Peak	Horizontal
	8140.000	36.8	10.1	46.9	74.0	-27.1	Peak	Vertical
*	10040.600	35.0	14.0	49.0	88.2	-39.2	Peak	Vertical
	10839.600	35.2	15.2	50.4	74.0	-23.6	Peak	Vertical
*	17022.500	35.5	16.2	51.7	88.2	-36.5	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-06
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	9464.300	34.8	13.6	48.4	74.0	-25.6	Peak	Horizontal
*	10006.600	34.7	14.1	48.8	88.2	-39.4	Peak	Horizontal
	10911.000	34.4	15.4	49.8	74.0	-24.2	Peak	Horizontal
*	17354.000	35.0	17.0	52.0	88.2	-36.2	Peak	Horizontal
	8095.800	36.2	10.2	46.4	74.0	-27.6	Peak	Vertical
*	8787.700	36.8	11.5	48.3	88.2	-39.9	Peak	Vertical
*	9857.000	35.0	14.3	49.3	88.2	-38.9	Peak	Vertical
	10781.800	34.4	15.3	49.7	74.0	-24.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-06
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9922.492	33.5	12.7	46.2	88.2	-42.0	Peak	Horizontal
*	10347.540	32.3	14.2	46.5	88.2	-41.7	Peak	Horizontal
	11422.040	31.8	16.5	48.3	74.0	-25.7	Peak	Horizontal
	11935.490	32.6	15.9	48.5	54.0	-5.5	Average	Horizontal
	11935.490	42.0	15.9	57.9	74.0	-16.1	Peak	Vertical
*	10097.610	32.5	12.9	45.4	88.2	-42.8	Peak	Vertical
	11641.360	30.2	16.9	47.1	74.0	-26.9	Peak	Vertical
	11938.890	34.2	15.9	50.1	74.0	-23.9	Peak	Vertical
*	14127.010	31.4	18.8	50.2	88.2	-38.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-06
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	9396.300	33.8	13.4	47.2	74.0	-26.8	Peak	Horizontal
*	9892.700	34.6	14.0	48.6	88.2	-39.6	Peak	Horizontal
	11072.500	34.6	15.1	49.7	74.0	-24.3	Peak	Horizontal
*	14210.700	35.1	16.2	51.3	88.2	-36.9	Peak	Horizontal
	9409.900	34.9	13.7	48.6	74.0	-25.4	Peak	Vertical
*	10574.400	35.5	15.2	50.7	88.2	-37.5	Peak	Vertical
	10909.300	33.8	15.3	49.1	74.0	-24.9	Peak	Vertical
*	14810.800	34.5	16.1	50.6	88.2	-37.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-06
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8077.100	36.5	10.4	46.9	74.0	-27.1	Peak	Horizontal
*	9741.400	35.7	14.1	49.8	88.2	-38.4	Peak	Horizontal
	10678.100	34.9	15.2	50.1	74.0	-23.9	Peak	Horizontal
*	14180.100	36.5	16.1	52.6	88.2	-35.6	Peak	Horizontal
	8289.600	36.2	9.8	46.0	74.0	-28.0	Peak	Vertical
*	10042.300	34.9	14.0	48.9	88.2	-39.3	Peak	Vertical
	11055.500	34.1	15.2	49.3	74.0	-24.7	Peak	Vertical
*	14200.500	34.0	16.2	50.2	88.2	-38.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-06
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8112.800	36.7	10.2	46.9	74.0	-27.1	Peak	Horizontal
*	10010.000	35.2	14.1	49.3	88.2	-38.9	Peak	Horizontal
	11276.500	34.7	14.7	49.4	74.0	-24.6	Peak	Horizontal
*	15076.000	37.6	15.1	52.7	88.2	-35.5	Peak	Horizontal
	9362.300	35.6	13.5	49.1	74.0	-24.9	Peak	Vertical
*	10239.500	35.7	14.3	50.0	88.2	-38.2	Peak	Vertical
	10963.700	35.3	15.2	50.5	74.0	-23.5	Peak	Vertical
*	14615.300	36.0	16.6	52.6	88.2	-35.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-06
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8199.500	36.5	10.0	46.5	74.0	-27.5	Peak	Horizontal
*	10197.000	35.1	14.5	49.6	88.2	-38.6	Peak	Horizontal
	10841.300	35.5	15.2	50.7	74.0	-23.3	Peak	Horizontal
*	14098.500	35.7	16.0	51.7	88.2	-36.5	Peak	Horizontal
	8435.800	36.0	10.2	46.2	74.0	-27.8	Peak	Vertical
*	9243.300	36.7	13.3	50.0	88.2	-38.2	Peak	Vertical
*	10428.200	36.1	14.8	50.9	88.2	-37.3	Peak	Vertical
	10834.500	35.3	15.1	50.4	74.0	-23.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-06
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8444.300	37.2	10.3	47.5	74.0	-26.5	Peak	Horizontal
*	10538.700	35.8	15.0	50.8	88.2	-37.4	Peak	Horizontal
	10899.100	35.4	15.1	50.5	74.0	-23.5	Peak	Horizontal
*	17320.000	36.8	16.9	53.7	88.2	-34.5	Peak	Horizontal
	8133.200	36.3	10.2	46.5	74.0	-27.5	Peak	Vertical
*	10055.900	35.3	14.0	49.3	88.2	-38.9	Peak	Vertical
	10800.500	35.9	15.2	51.1	74.0	-22.9	Peak	Vertical
*	13950.600	36.7	15.4	52.1	88.2	-36.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-07
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8208.000	35.6	10.0	45.6	74.0	-28.4	Peak	Horizontal
*	10198.700	35.0	14.4	49.4	88.2	-38.8	Peak	Horizontal
	11990.500	38.2	13.5	51.7	74.0	-22.3	Peak	Horizontal
*	17505.300	35.5	18.9	54.4	88.2	-33.8	Peak	Horizontal
	8306.600	35.1	10.0	45.1	74.0	-28.9	Peak	Vertical
*	9814.500	34.9	14.6	49.5	88.2	-38.7	Peak	Vertical
	11988.800	36.9	13.5	50.4	74.0	-23.6	Peak	Vertical
*	17211.200	35.8	16.0	51.8	88.2	-36.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-07
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8121.300	35.2	10.3	45.5	74.0	-28.5	Peak	Horizontal
*	9925.000	34.4	14.5	48.9	88.2	-39.3	Peak	Horizontal
	10766.500	33.3	15.2	48.5	74.0	-25.5	Peak	Horizontal
*	14724.100	34.3	16.4	50.7	88.2	-37.5	Peak	Horizontal
	9365.700	34.1	13.6	47.7	74.0	-26.3	Peak	Vertical
*	9853.600	34.0	14.3	48.3	88.2	-39.9	Peak	Vertical
	11002.800	33.6	15.3	48.9	74.0	-25.1	Peak	Vertical
*	14185.200	34.4	16.2	50.6	88.2	-37.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-07
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	9399.700	34.5	13.4	47.9	74.0	-26.1	Peak	Horizontal
*	9780.500	34.6	14.0	48.6	88.2	-39.6	Peak	Horizontal
	10996.000	34.0	15.3	49.3	74.0	-24.7	Peak	Horizontal
*	14103.600	35.0	16.0	51.0	88.2	-37.2	Peak	Horizontal
	8111.100	36.4	10.2	46.6	74.0	-27.4	Peak	Vertical
*	9739.700	35.0	14.1	49.1	88.2	-39.1	Peak	Vertical
	10618.600	34.6	15.3	49.9	74.0	-24.1	Peak	Vertical
*	14703.700	34.6	16.4	51.0	88.2	-37.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-07
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8160.400	35.4	10.1	45.5	74.0	-28.5	Peak	Horizontal
*	9935.200	34.0	14.3	48.3	88.2	-39.9	Peak	Horizontal
	11021.500	33.8	15.3	49.1	74.0	-24.9	Peak	Horizontal
*	14209.000	34.7	16.2	50.9	88.2	-37.3	Peak	Horizontal
	8163.800	34.7	10.1	44.8	74.0	-29.2	Peak	Vertical
*	9926.700	33.2	14.5	47.7	88.2	-40.5	Peak	Vertical
	10843.000	33.7	15.2	48.9	74.0	-25.1	Peak	Vertical
*	14193.700	33.9	16.3	50.2	88.2	-38.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-07
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8214.800	35.2	10.0	45.2	74.0	-28.8	Peak	Horizontal
*	9826.400	34.4	14.6	49.0	88.2	-39.2	Peak	Horizontal
	10802.200	34.6	15.2	49.8	74.0	-24.2	Peak	Horizontal
*	14180.100	34.6	16.1	50.7	88.2	-37.5	Peak	Horizontal
	8170.600	35.4	10.2	45.6	74.0	-28.4	Peak	Vertical
*	10086.500	33.9	14.0	47.9	88.2	-40.3	Peak	Vertical
	10987.500	33.4	15.4	48.8	74.0	-25.2	Peak	Vertical
*	14205.600	36.2	16.2	52.4	88.2	-35.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-07
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8129.800	36.2	10.3	46.5	74.0	-27.5	Peak	Horizontal
*	9857.000	33.9	14.3	48.2	88.2	-40.0	Peak	Horizontal
	10844.700	33.5	15.2	48.7	74.0	-25.3	Peak	Horizontal
*	14256.600	34.0	16.5	50.5	88.2	-37.7	Peak	Horizontal
	8235.200	35.9	9.9	45.8	74.0	-28.2	Peak	Vertical
*	10186.800	35.8	14.3	50.1	88.2	-38.1	Peak	Vertical
	10756.300	33.9	15.1	49.0	74.0	-25.0	Peak	Vertical
*	14011.800	35.4	15.7	51.1	88.2	-37.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-07
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8094.100	36.1	10.2	46.3	74.0	-27.7	Peak	Horizontal
*	9865.500	34.2	14.3	48.5	88.2	-39.7	Peak	Horizontal
	11990.500	38.1	13.5	51.6	74.0	-22.4	Peak	Horizontal
*	14098.500	34.5	16.0	50.5	88.2	-37.7	Peak	Horizontal
	8240.300	35.7	9.9	45.6	74.0	-28.4	Peak	Vertical
*	9858.700	34.6	14.3	48.9	88.2	-39.3	Peak	Vertical
	11006.200	33.4	15.3	48.7	74.0	-25.3	Peak	Vertical
*	14333.100	34.2	16.5	50.7	88.2	-37.5	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-07
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8063.500	37.0	10.5	47.5	74.0	-26.5	Peak	Horizontal
*	9906.300	34.1	14.2	48.3	88.2	-39.9	Peak	Horizontal
	11001.100	33.8	15.3	49.1	74.0	-24.9	Peak	Horizontal
*	14107.000	34.5	16.0	50.5	88.2	-37.7	Peak	Horizontal
	8281.100	35.6	9.9	45.5	74.0	-28.5	Peak	Vertical
*	10047.400	33.7	14.0	47.7	88.2	-40.5	Peak	Vertical
	10717.200	33.7	15.2	48.9	74.0	-25.1	Peak	Vertical
*	14105.300	34.5	16.0	50.5	88.2	-37.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-07
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8213.100	35.6	10.0	45.6	74.0	-28.4	Peak	Horizontal
*	10020.200	34.3	14.0	48.3	88.2	-39.9	Peak	Horizontal
	10914.400	33.7	15.4	49.1	74.0	-24.9	Peak	Horizontal
*	14175.000	34.2	16.0	50.2	88.2	-38.0	Peak	Horizontal
	8124.700	35.7	10.3	46.0	74.0	-28.0	Peak	Vertical
*	10225.900	34.7	14.2	48.9	88.2	-39.3	Peak	Vertical
	10865.100	33.8	15.3	49.1	74.0	-24.9	Peak	Vertical
*	14856.700	34.6	16.3	50.9	88.2	-37.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-07
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8233.500	35.0	9.9	44.9	74.0	-29.1	Peak	Horizontal
*	9970.900	34.9	14.2	49.1	88.2	-39.1	Peak	Horizontal
	11021.500	34.4	15.3	49.7	74.0	-24.3	Peak	Horizontal
*	14249.800	33.8	16.5	50.3	88.2	-37.9	Peak	Horizontal
	8257.300	35.4	10.0	45.4	74.0	-28.6	Peak	Vertical
*	9928.400	33.6	14.4	48.0	88.2	-40.2	Peak	Vertical
	10902.500	33.5	15.1	48.6	74.0	-25.4	Peak	Vertical
*	14193.700	33.9	16.3	50.2	88.2	-38.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-07
Test Mode	802.11be-EHT320	Test Channel	31
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.600	35.4	10.1	45.5	74.0	-28.5	Peak	Horizontal
*	9858.700	33.8	14.3	48.1	88.2	-40.1	Peak	Horizontal
	12112.900	37.2	13.3	50.5	74.0	-23.5	Peak	Horizontal
*	14588.100	33.5	16.6	50.1	88.2	-38.1	Peak	Horizontal
	8208.000	35.2	10.0	45.2	74.0	-28.8	Peak	Vertical
*	9748.200	35.5	14.0	49.5	88.2	-38.7	Peak	Vertical
	11077.600	34.3	15.0	49.3	74.0	-24.7	Peak	Vertical
*	14215.800	34.2	16.1	50.3	88.2	-37.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Charles Zhang
Test Site	WZ-AC1	Test Date	2024-07-07
Test Mode	802.11be-EHT320	Test Channel	63
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8102.600	35.6	10.1	45.7	74.0	-28.3	Peak	Horizontal
*	9773.700	34.3	14.2	48.5	88.2	-39.7	Peak	Horizontal
	10812.400	34.4	15.1	49.5	74.0	-24.5	Peak	Horizontal
*	14720.700	34.0	16.4	50.4	88.2	-37.8	Peak	Horizontal
	9464.300	34.5	13.6	48.1	74.0	-25.9	Peak	Vertical
*	9826.400	33.8	14.6	48.4	88.2	-39.8	Peak	Vertical
	10900.800	34.4	15.1	49.5	74.0	-24.5	Peak	Vertical
*	14200.500	34.8	16.2	51.0	88.2	-37.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Antenna_348:

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8726.500	31.9	11.8	43.7	88.2	-44.5	Peak	Horizontal
*	10013.400	33.6	13.0	46.7	88.2	-41.5	Peak	Horizontal
	11108.200	31.7	15.9	47.6	74.0	-26.4	Peak	Horizontal
	11917.400	31.0	16.3	47.2	54.0	-6.8	Average	Horizontal
	11917.400	38.8	16.3	55.1	74.0	-19.0	Peak	Horizontal
*	8820.000	32.4	11.8	44.2	88.2	-44.0	Peak	Vertical
*	10074.600	33.1	12.9	46.0	88.2	-42.2	Peak	Vertical
	11917.400	29.0	16.3	45.3	54.0	-8.7	Average	Vertical
	11917.400	37.4	16.3	53.7	74.0	-20.3	Peak	Vertical
	15841.000	29.8	16.6	46.4	74.0	-27.6	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10436.700	34.1	14.7	48.8	88.2	-39.4	Peak	Horizontal
	11388.700	31.7	16.7	48.4	74.0	-25.6	Peak	Horizontal
	12391.700	34.1	15.9	50.0	74.0	-24.0	Peak	Horizontal
*	14447.000	32.4	19.4	51.8	88.2	-36.4	Peak	Horizontal
*	10351.700	32.7	14.4	47.1	88.2	-41.1	Peak	Vertical
	11718.500	31.1	17.0	48.1	74.0	-25.9	Peak	Vertical
	12386.600	33.4	16.0	49.4	74.0	-24.6	Peak	Vertical
*	14428.300	33.6	19.1	52.7	88.2	-35.5	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10020.200	33.1	13.1	46.2	88.2	-42.0	Peak	Horizontal
*	10348.300	32.9	14.4	47.3	88.2	-40.9	Peak	Horizontal
	11419.300	32.2	16.7	48.9	74.0	-25.1	Peak	Horizontal
	15764.500	33.3	16.1	49.4	74.0	-24.6	Peak	Horizontal
*	9942.000	33.2	13.0	46.2	88.2	-42.0	Peak	Vertical
*	10531.900	32.8	14.6	47.4	88.2	-40.8	Peak	Vertical
	11465.200	31.3	16.7	48.0	74.0	-26.0	Peak	Vertical
	11647.100	30.8	17.1	47.9	74.0	-26.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8753.700	32.9	11.8	44.7	88.2	-43.5	Peak	Horizontal
*	10003.200	33.3	13.0	46.3	88.2	-41.9	Peak	Horizontal
	11074.200	32.5	15.9	48.4	74.0	-25.6	Peak	Horizontal
	12310.100	31.9	16.3	48.2	74.0	-25.8	Peak	Horizontal
*	8806.400	33.7	11.8	45.5	88.2	-42.7	Peak	Vertical
*	9918.200	33.4	12.9	46.3	88.2	-41.9	Peak	Vertical
	11235.700	32.2	16.4	48.6	74.0	-25.4	Peak	Vertical
	12238.700	31.8	16.3	48.1	74.0	-25.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11395.500	31.4	16.8	48.2	74.0	-25.8	Peak	Horizontal
	11908.900	32.0	16.4	48.4	74.0	-25.6	Peak	Horizontal
*	14044.100	31.2	18.9	50.1	88.2	-38.1	Peak	Horizontal
*	15004.600	32.8	18.2	51.0	88.2	-37.2	Peak	Horizontal
	11245.900	31.0	16.5	47.5	74.0	-26.5	Peak	Vertical
	11829.000	31.8	16.7	48.5	74.0	-25.5	Peak	Vertical
*	13947.200	31.7	18.5	50.2	88.2	-38.0	Peak	Vertical
*	17003.800	33.7	20.6	54.3	88.2	-33.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8721.400	32.3	11.8	44.1	88.2	-44.1	Peak	Horizontal
*	10280.300	32.6	14.1	46.7	88.2	-41.5	Peak	Horizontal
	11618.200	31.7	16.7	48.4	74.0	-25.6	Peak	Horizontal
	15514.600	32.7	16.9	49.6	74.0	-24.4	Peak	Horizontal
*	8677.200	32.4	11.7	44.1	88.2	-44.1	Peak	Vertical
*	9828.100	33.2	13.0	46.2	88.2	-42.0	Peak	Vertical
	11313.900	31.1	16.6	47.7	74.0	-26.3	Peak	Vertical
	12116.300	31.7	16.4	48.1	74.0	-25.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8704.400	32.8	11.8	44.6	88.2	-43.6	Peak	Horizontal
*	10013.400	34.4	13.0	47.4	88.2	-40.8	Peak	Horizontal
	11285.000	31.8	16.1	47.9	74.0	-26.1	Peak	Horizontal
	11931.000	31.3	16.1	47.4	54.0	-6.6	Average	Horizontal
	11931.000	38.2	16.1	54.3	74.0	-19.7	Peak	Horizontal
*	8684.000	31.6	11.7	43.3	88.2	-44.9	Peak	Vertical
*	9926.700	35.0	13.0	48.0	88.2	-40.2	Peak	Vertical
	11313.900	31.2	16.6	47.8	74.0	-26.2	Peak	Vertical
	11931.000	29.1	16.1	45.2	54.0	-8.8	Average	Vertical
	11931.000	36.7	16.1	52.8	74.0	-21.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8723.100	32.4	11.8	44.2	88.2	-44.0	Peak	Horizontal
*	9928.400	33.6	13.0	46.6	88.2	-41.6	Peak	Horizontal
	11655.600	31.7	17.0	48.7	74.0	-25.3	Peak	Horizontal
	12427.400	32.0	15.6	47.6	74.0	-26.4	Peak	Horizontal
	11254.400	31.4	16.6	48.0	74.0	-26.0	Peak	Vertical
	11657.300	31.4	17.0	48.4	74.0	-25.6	Peak	Vertical
*	15002.900	34.2	18.2	52.4	88.2	-35.8	Peak	Vertical
*	17493.400	31.3	22.5	53.8	88.2	-34.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9993.000	33.9	12.9	46.8	88.2	-41.4	Peak	Horizontal
	11687.900	31.9	16.5	48.4	74.0	-25.6	Peak	Horizontal
	12250.600	31.6	16.3	47.9	74.0	-26.1	Peak	Horizontal
*	14566.000	33.1	18.5	51.6	88.2	-36.6	Peak	Horizontal
	11217.000	31.8	16.0	47.8	74.0	-26.2	Peak	Vertical
	11625.000	31.5	16.9	48.4	74.0	-25.6	Peak	Vertical
*	13976.100	30.8	18.5	49.3	88.2	-38.9	Peak	Vertical
*	17000.400	33.8	20.6	54.4	88.2	-33.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8689.100	32.7	11.7	44.4	88.2	-43.8	Peak	Horizontal
*	10101.800	34.3	13.2	47.5	88.2	-40.7	Peak	Horizontal
	11489.000	32.2	16.9	49.1	74.0	-24.9	Peak	Horizontal
	14481.000	27.7	18.5	46.2	54.0	-7.8	Average	Horizontal
	14481.000	33.9	18.5	52.4	74.0	-21.6	Peak	Horizontal
*	8780.900	32.1	11.8	43.9	88.2	-44.3	Peak	Vertical
*	9923.300	34.0	12.9	46.9	88.2	-41.3	Peak	Vertical
	11157.500	32.0	16.2	48.2	74.0	-25.8	Peak	Vertical
	11606.300	31.9	16.4	48.3	74.0	-25.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8814.900	32.7	11.8	44.5	88.2	-43.7	Peak	Horizontal
*	9948.800	33.2	13.1	46.3	88.2	-41.9	Peak	Horizontal
	11291.800	32.1	16.2	48.3	74.0	-25.7	Peak	Horizontal
	12033.000	32.1	16.1	48.2	74.0	-25.8	Peak	Horizontal
	8109.400	33.1	10.9	44.0	74.0	-30.0	Peak	Vertical
*	8869.300	32.1	12.1	44.2	88.2	-44.0	Peak	Vertical
*	9993.000	33.6	12.9	46.5	88.2	-41.7	Peak	Vertical
	11455.000	31.4	16.6	48.0	74.0	-26.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8692.500	31.9	11.8	43.7	88.2	-44.5	Peak	Horizontal
*	10259.900	33.4	13.8	47.2	88.2	-41.0	Peak	Horizontal
	10997.700	31.9	15.9	47.8	74.0	-26.2	Peak	Horizontal
	11655.600	30.9	17.0	47.9	74.0	-26.1	Peak	Horizontal
*	8633.000	32.8	11.5	44.3	88.2	-43.9	Peak	Vertical
*	10003.200	33.7	13.0	46.7	88.2	-41.5	Peak	Vertical
	10715.500	33.8	14.9	48.7	74.0	-25.3	Peak	Vertical
	11563.800	31.4	16.9	48.3	74.0	-25.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10919.500	31.9	15.8	47.7	74.0	-26.3	Peak	Horizontal
	11959.900	29.7	16.1	45.8	54.0	-8.2	Average	Horizontal
	11959.900	37.6	16.1	53.7	74.0	-20.3	Peak	Horizontal
*	14039.000	31.9	18.9	50.8	88.2	-37.4	Peak	Horizontal
*	15013.100	32.9	18.3	51.2	88.2	-37.0	Peak	Horizontal
*	10375.500	33.6	14.3	47.9	88.2	-40.3	Peak	Vertical
	11548.500	31.5	16.9	48.4	74.0	-25.6	Peak	Vertical
	11985.400	31.8	16.1	47.9	54.0	-6.1	Average	Vertical
	11985.400	39.0	16.1	55.1	74.0	-18.9	Peak	Vertical
*	14047.500	31.9	18.9	50.8	88.2	-37.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10023.600	33.9	13.1	47.0	88.2	-41.2	Peak	Horizontal
	11558.700	31.9	17.0	48.9	74.0	-25.1	Peak	Horizontal
	12109.500	32.7	16.4	49.1	74.0	-24.9	Peak	Horizontal
*	14938.300	32.7	18.8	51.5	88.2	-36.7	Peak	Horizontal
*	8716.300	32.5	11.9	44.4	88.2	-43.8	Peak	Vertical
*	9943.700	33.0	13.0	46.0	88.2	-42.2	Peak	Vertical
	11262.900	31.3	16.4	47.7	74.0	-26.3	Peak	Vertical
	11625.000	31.0	16.9	47.9	74.0	-26.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11477.100	31.3	16.9	48.2	74.0	-25.8	Peak	Horizontal
	12221.700	31.7	16.5	48.2	74.0	-25.8	Peak	Horizontal
*	14057.700	31.6	18.8	50.4	88.2	-37.8	Peak	Horizontal
*	14933.200	33.0	18.8	51.8	88.2	-36.4	Peak	Horizontal
*	8763.900	31.9	11.8	43.7	88.2	-44.5	Peak	Vertical
*	9952.200	34.3	13.1	47.4	88.2	-40.8	Peak	Vertical
	11087.800	31.9	16.0	47.9	74.0	-26.1	Peak	Vertical
	11885.100	32.1	16.5	48.6	74.0	-25.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8726.500	32.6	11.8	44.4	88.2	-43.8	Peak	Horizontal
*	9710.800	33.7	12.9	46.6	88.2	-41.6	Peak	Horizontal
	10863.400	31.6	15.6	47.2	74.0	-26.8	Peak	Horizontal
	11558.700	31.3	17.0	48.3	74.0	-25.7	Peak	Horizontal
*	8724.800	33.2	11.8	45.0	88.2	-43.2	Peak	Vertical
*	9964.100	33.6	13.1	46.7	88.2	-41.5	Peak	Vertical
	11230.600	32.3	16.3	48.6	74.0	-25.4	Peak	Vertical
	11645.400	31.2	17.1	48.3	74.0	-25.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10892.300	32.8	15.5	48.3	74.0	-25.7	Peak	Horizontal
	12228.500	32.5	16.4	48.9	74.0	-25.1	Peak	Horizontal
*	13894.500	31.8	18.0	49.8	88.2	-38.4	Peak	Horizontal
*	14926.400	33.3	18.7	52.0	88.2	-36.2	Peak	Horizontal
*	8704.400	32.7	11.8	44.5	88.2	-43.7	Peak	Vertical
*	9986.200	33.3	13.0	46.3	88.2	-41.9	Peak	Vertical
	11557.000	32.4	17.0	49.4	74.0	-24.6	Peak	Vertical
	12279.500	31.8	16.3	48.1	74.0	-25.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8784.300	32.7	11.8	44.5	88.2	-43.7	Peak	Horizontal
*	10013.400	33.4	13.0	46.4	88.2	-41.8	Peak	Horizontal
	10982.400	31.7	15.6	47.3	74.0	-26.7	Peak	Horizontal
	11647.100	31.8	17.1	48.9	74.0	-25.1	Peak	Horizontal
*	8695.900	32.3	11.8	44.1	88.2	-44.1	Peak	Vertical
*	10377.200	33.8	14.3	48.1	88.2	-40.1	Peak	Vertical
	11179.600	32.9	16.3	49.2	74.0	-24.8	Peak	Vertical
	11640.300	31.4	17.1	48.5	74.0	-25.5	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8714.600	32.5	11.9	44.4	88.2	-43.8	Peak	Horizontal
*	10020.200	33.9	13.1	47.0	88.2	-41.2	Peak	Horizontal
	11541.700	31.9	16.8	48.7	74.0	-25.3	Peak	Horizontal
	11987.100	30.6	16.1	46.7	54.0	-7.3	Average	Horizontal
	11987.100	38.3	16.1	54.4	74.0	-19.6	Peak	Horizontal
*	8835.300	33.2	12.0	45.2	88.2	-43.0	Peak	Vertical
*	10368.700	33.5	14.4	47.9	88.2	-40.3	Peak	Vertical
	11402.300	31.6	16.8	48.4	74.0	-25.6	Peak	Vertical
	12050.000	33.7	16.2	49.9	74.0	-24.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8650.000	33.5	11.5	45.0	88.2	-43.2	Peak	Horizontal
*	9751.600	34.0	12.8	46.8	88.2	-41.4	Peak	Horizontal
	10928.000	31.8	15.9	47.7	74.0	-26.3	Peak	Horizontal
	11721.900	31.8	17.0	48.8	74.0	-25.2	Peak	Horizontal
*	8842.100	32.3	12.0	44.3	88.2	-43.9	Peak	Vertical
*	10191.900	33.5	13.7	47.2	88.2	-41.0	Peak	Vertical
	11247.600	30.9	16.6	47.5	74.0	-26.5	Peak	Vertical
	11500.900	32.4	16.7	49.1	74.0	-24.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8857.400	33.1	12.1	45.2	88.2	-43.0	Peak	Horizontal
*	10360.200	32.0	14.4	46.4	88.2	-41.8	Peak	Horizontal
	11171.100	31.3	16.3	47.6	74.0	-26.4	Peak	Horizontal
	11611.400	31.6	16.5	48.1	74.0	-25.9	Peak	Horizontal
*	8743.500	33.0	11.8	44.8	88.2	-43.4	Peak	Vertical
*	9998.100	34.4	13.0	47.4	88.2	-40.8	Peak	Vertical
	10968.800	32.5	15.5	48.0	74.0	-26.0	Peak	Vertical
	11470.300	32.0	16.8	48.8	74.0	-25.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8882.900	32.0	12.2	44.2	88.2	-44.0	Peak	Horizontal
*	10001.500	33.0	13.0	46.0	88.2	-42.2	Peak	Horizontal
	11257.800	31.2	16.5	47.7	74.0	-26.3	Peak	Horizontal
	11699.800	32.1	16.7	48.8	74.0	-25.2	Peak	Horizontal
*	9919.900	33.0	12.9	45.9	88.2	-42.3	Peak	Vertical
*	10394.200	32.2	14.4	46.6	88.2	-41.6	Peak	Vertical
	11414.200	32.4	16.8	49.2	74.0	-24.8	Peak	Vertical
	11869.800	32.3	16.4	48.7	74.0	-25.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10319.400	32.5	14.2	46.7	88.2	-41.5	Peak	Horizontal
	11920.800	33.5	16.2	49.7	54.0	-4.3	Average	Horizontal
	11920.800	40.3	16.2	56.5	74.0	-17.5	Peak	Horizontal
*	14062.800	31.4	18.7	50.1	88.2	-38.1	Peak	Horizontal
	14486.100	26.1	18.5	44.6	54.0	-9.4	Average	Horizontal
	14486.100	32.7	18.5	51.2	74.0	-22.8	Peak	Horizontal
*	9994.700	33.6	13.0	46.6	88.2	-41.6	Peak	Vertical
	11232.300	31.7	16.3	48.0	74.0	-26.0	Peak	Vertical
	11914.000	30.4	16.3	46.7	54.0	-7.3	Average	Vertical
	11914.000	37.5	16.3	53.8	74.0	-20.2	Peak	Vertical
*	14384.100	32.5	19.2	51.7	88.2	-36.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9959.000	33.6	13.1	46.7	88.2	-41.5	Peak	Horizontal
	11710.000	31.4	17.0	48.4	74.0	-25.6	Peak	Horizontal
	12384.900	29.7	16.0	45.7	54.0	-8.3	Average	Horizontal
	12384.900	35.7	16.0	51.7	74.0	-22.3	Peak	Horizontal
*	14469.100	32.6	18.9	51.5	88.2	-36.7	Peak	Horizontal
*	8728.200	31.8	11.8	43.6	88.2	-44.6	Peak	Vertical
*	9908.000	34.1	12.9	47.0	88.2	-41.2	Peak	Vertical
	11645.400	31.5	17.1	48.6	74.0	-25.4	Peak	Vertical
	12383.200	33.1	16.0	49.1	74.0	-24.9	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8694.200	32.6	11.8	44.4	88.2	-43.8	Peak	Horizontal
*	10059.300	33.3	13.0	46.3	88.2	-41.9	Peak	Horizontal
	11162.600	31.5	16.3	47.8	74.0	-26.2	Peak	Horizontal
	11640.300	31.2	17.1	48.3	74.0	-25.7	Peak	Horizontal
*	9824.700	33.6	13.0	46.6	88.2	-41.6	Peak	Vertical
	11419.300	31.6	16.7	48.3	74.0	-25.7	Peak	Vertical
	12177.500	31.6	16.5	48.1	74.0	-25.9	Peak	Vertical
*	14469.100	33.0	18.9	51.9	88.2	-36.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11523.000	31.6	16.4	48.0	74.0	-26.0	Peak	Horizontal
	12131.600	31.6	16.5	48.1	74.0	-25.9	Peak	Horizontal
*	13921.700	31.6	17.9	49.5	88.2	-38.7	Peak	Horizontal
*	14581.300	33.0	18.5	51.5	88.2	-36.7	Peak	Horizontal
*	8753.700	33.1	11.8	44.9	88.2	-43.3	Peak	Vertical
*	9911.400	34.2	12.9	47.1	88.2	-41.1	Peak	Vertical
	11414.200	31.4	16.8	48.2	74.0	-25.8	Peak	Vertical
	12021.100	32.2	16.0	48.2	74.0	-25.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-25
Test Mode	802.11be-EHT20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8770.700	32.1	11.8	43.9	88.2	-44.3	Peak	Horizontal
*	9729.500	33.1	12.9	46.0	88.2	-42.2	Peak	Horizontal
	11033.400	32.2	15.7	47.9	74.0	-26.1	Peak	Horizontal
	11907.200	31.2	16.4	47.6	74.0	-26.4	Peak	Horizontal
*	10001.500	34.1	13.0	47.1	88.2	-41.1	Peak	Vertical
	11307.100	31.7	16.5	48.2	74.0	-25.8	Peak	Vertical
	11934.400	31.0	16.1	47.1	74.0	-26.9	Peak	Vertical
*	14943.400	33.0	18.7	51.7	88.2	-36.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-26
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8806.400	32.8	11.8	44.6	88.2	-43.6	Peak	Horizontal
*	10003.200	33.0	13.0	46.0	88.2	-42.2	Peak	Horizontal
	10890.600	32.3	15.5	47.8	74.0	-26.2	Peak	Horizontal
	11609.700	31.5	16.5	48.0	74.0	-26.0	Peak	Horizontal
*	8709.500	32.0	11.9	43.9	88.2	-44.3	Peak	Vertical
*	10280.300	32.0	14.1	46.1	88.2	-42.1	Peak	Vertical
	11371.700	31.5	16.5	48.0	74.0	-26.0	Peak	Vertical
	11992.200	31.4	16.1	47.5	74.0	-26.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-26
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8673.800	32.6	11.7	44.3	88.2	-43.9	Peak	Horizontal
*	9940.300	34.1	13.0	47.1	88.2	-41.1	Peak	Horizontal
	10953.500	32.5	15.6	48.1	74.0	-25.9	Peak	Horizontal
	11934.400	35.6	16.1	51.7	54.0	-2.3	Average	Horizontal
	11934.400	44.7	16.1	60.8	74.0	-13.2	Peak	Horizontal
*	9627.500	33.9	12.5	46.4	88.2	-41.8	Peak	Vertical
*	10278.600	32.6	14.1	46.7	88.2	-41.5	Peak	Vertical
	11147.300	31.4	16.0	47.4	74.0	-26.6	Peak	Vertical
	11932.700	31.1	16.1	47.2	54.0	-6.8	Average	Vertical
	11932.700	41.0	16.1	57.1	74.0	-16.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-26
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10015.100	33.7	13.1	46.8	88.2	-41.4	Peak	Horizontal
*	10251.400	32.6	13.7	46.3	88.2	-41.9	Peak	Horizontal
	11133.700	32.0	15.8	47.8	74.0	-26.2	Peak	Horizontal
	11796.700	31.1	16.8	47.9	74.0	-26.1	Peak	Horizontal
	11157.500	31.5	16.2	47.7	74.0	-26.3	Peak	Vertical
	11621.600	31.6	16.8	48.4	74.0	-25.6	Peak	Vertical
*	12850.700	32.0	16.4	48.4	88.2	-39.8	Peak	Vertical
*	14023.700	32.1	18.8	50.9	88.2	-37.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-26
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8859.100	32.8	12.1	44.9	88.2	-43.3	Peak	Horizontal
*	10025.300	33.4	13.1	46.5	88.2	-41.7	Peak	Horizontal
	10933.100	32.5	15.8	48.3	74.0	-25.7	Peak	Horizontal
	11643.700	31.2	17.1	48.3	74.0	-25.7	Peak	Horizontal
*	8780.900	32.4	11.8	44.2	88.2	-44.0	Peak	Vertical
*	10020.200	33.2	13.1	46.3	88.2	-41.9	Peak	Vertical
	11553.600	31.7	16.9	48.6	74.0	-25.4	Peak	Vertical
	12359.400	32.5	16.0	48.5	74.0	-25.5	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-26
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9591.800	33.9	12.4	46.3	88.2	-41.9	Peak	Horizontal
*	10344.900	32.1	14.3	46.4	88.2	-41.8	Peak	Horizontal
	11251.000	31.2	16.6	47.8	74.0	-26.2	Peak	Horizontal
	11876.600	31.8	16.4	48.2	74.0	-25.8	Peak	Horizontal
*	10042.300	33.7	13.1	46.8	88.2	-41.4	Peak	Vertical
	11072.500	31.8	15.8	47.6	74.0	-26.4	Peak	Vertical
	11606.300	32.7	16.4	49.1	74.0	-24.9	Peak	Vertical
*	14057.700	33.0	18.8	51.8	88.2	-36.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-26
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9670.000	34.3	12.6	46.9	88.2	-41.3	Peak	Horizontal
*	10351.700	32.6	14.4	47.0	88.2	-41.2	Peak	Horizontal
	11346.200	32.4	16.6	49.0	74.0	-25.0	Peak	Horizontal
	11849.400	32.4	16.3	48.7	74.0	-25.3	Peak	Horizontal
*	9823.000	32.6	13.0	45.6	88.2	-42.6	Peak	Vertical
*	10108.600	33.2	13.3	46.5	88.2	-41.7	Peak	Vertical
	11402.300	31.1	16.8	47.9	74.0	-26.1	Peak	Vertical
	12114.600	32.1	16.4	48.5	74.0	-25.5	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-26
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9719.300	33.6	12.9	46.5	88.2	-41.7	Peak	Horizontal
*	10356.800	31.6	14.4	46.0	88.2	-42.2	Peak	Horizontal
	11099.700	31.5	16.0	47.5	74.0	-26.5	Peak	Horizontal
	11567.200	32.0	16.8	48.8	74.0	-25.2	Peak	Horizontal
*	9947.100	34.1	13.1	47.2	88.2	-41.0	Peak	Vertical
*	10276.900	33.4	14.0	47.4	88.2	-40.8	Peak	Vertical
	11271.400	31.7	16.3	48.0	74.0	-26.0	Peak	Vertical
	12148.600	31.5	16.5	48.0	74.0	-26.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-26
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8806.400	32.7	11.8	44.5	88.2	-43.7	Peak	Horizontal
*	10100.100	33.3	13.2	46.5	88.2	-41.7	Peak	Horizontal
	11381.900	31.3	16.6	47.9	74.0	-26.1	Peak	Horizontal
	11959.900	30.1	16.1	46.2	54.0	-7.8	Average	Horizontal
	11959.900	37.9	16.1	54.0	74.0	-20.0	Peak	Horizontal
*	8711.200	31.8	11.9	43.7	88.2	-44.5	Peak	Vertical
*	9965.800	33.9	13.1	47.0	88.2	-41.2	Peak	Vertical
	10973.900	32.5	15.6	48.1	74.0	-25.9	Peak	Vertical
	11963.300	30.0	16.1	46.1	54.0	-7.9	Average	Vertical
	11963.300	37.1	16.1	53.2	74.0	-20.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-26
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8770.700	33.1	11.8	44.9	88.2	-43.3	Peak	Horizontal
*	10186.800	32.3	13.5	45.8	88.2	-42.4	Peak	Horizontal
	11004.500	32.7	15.9	48.6	74.0	-25.4	Peak	Horizontal
	11740.600	31.2	16.8	48.0	74.0	-26.0	Peak	Horizontal
*	8774.100	32.9	11.8	44.7	88.2	-43.5	Peak	Vertical
*	9943.700	33.5	13.0	46.5	88.2	-41.7	Peak	Vertical
	10984.100	31.2	15.7	46.9	74.0	-27.1	Peak	Vertical
	11837.500	31.2	16.5	47.7	74.0	-26.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-09-26
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8784.300	32.1	11.8	43.9	88.2	-44.3	Peak	Horizontal
*	10268.400	32.7	13.9	46.6	88.2	-41.6	Peak	Horizontal
	11047.000	32.5	15.5	48.0	74.0	-26.0	Peak	Horizontal
	11602.900	32.0	16.4	48.4	74.0	-25.6	Peak	Horizontal
*	8711.200	31.9	11.9	43.8	88.2	-44.4	Peak	Vertical
*	10266.700	32.5	13.9	46.4	88.2	-41.8	Peak	Vertical
	11108.200	32.4	15.9	48.3	74.0	-25.7	Peak	Vertical
	11733.800	31.0	16.9	47.9	74.0	-26.1	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-10-10
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11570.600	31.3	16.5	47.8	74.0	-26.2	Peak	Horizontal
	12099.300	31.5	16.1	47.6	74.0	-26.4	Peak	Horizontal
*	13999.900	32.1	18.3	50.4	88.2	-37.8	Peak	Horizontal
*	14625.500	31.7	18.5	50.2	88.2	-38.0	Peak	Horizontal
	11081.000	31.6	15.9	47.5	74.0	-26.5	Peak	Vertical
	11664.100	30.7	16.6	47.3	74.0	-26.7	Peak	Vertical
*	13982.900	31.4	18.4	49.8	88.2	-38.4	Peak	Vertical
*	14928.100	32.0	18.6	50.6	88.2	-37.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-10-10
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11120.100	31.6	15.7	47.3	74.0	-26.7	Peak	Horizontal
	11810.300	30.5	16.7	47.2	74.0	-26.8	Peak	Horizontal
*	14062.800	30.8	18.6	49.4	88.2	-38.8	Peak	Horizontal
*	14943.400	31.8	18.6	50.4	88.2	-37.8	Peak	Horizontal
	11094.600	31.2	15.9	47.1	74.0	-26.9	Peak	Vertical
	12163.900	31.0	16.3	47.3	74.0	-26.7	Peak	Vertical
*	13954.000	30.4	18.7	49.1	88.2	-39.1	Peak	Vertical
*	14865.200	32.1	18.3	50.4	88.2	-37.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-10-10
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11014.700	31.0	15.8	46.8	74.0	-27.2	Peak	Horizontal
	12031.300	31.2	15.9	47.1	74.0	-26.9	Peak	Horizontal
*	13998.200	30.8	18.3	49.1	88.2	-39.1	Peak	Horizontal
*	15013.100	32.3	18.2	50.5	88.2	-37.7	Peak	Horizontal
	11121.800	31.2	15.7	46.9	74.0	-27.1	Peak	Vertical
	12206.400	31.7	16.5	48.2	74.0	-25.8	Peak	Vertical
*	13965.900	31.6	18.7	50.3	88.2	-37.9	Peak	Vertical
*	14846.500	31.5	18.7	50.2	88.2	-38.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-10-10
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11074.200	31.6	15.7	47.3	74.0	-26.7	Peak	Horizontal
	12061.900	31.8	16.0	47.8	74.0	-26.2	Peak	Horizontal
*	14246.400	31.5	18.5	50.0	88.2	-38.2	Peak	Horizontal
*	14790.400	31.5	18.2	49.7	88.2	-38.5	Peak	Horizontal
	11081.000	31.0	15.9	46.9	74.0	-27.1	Peak	Vertical
	11727.000	31.3	16.8	48.1	74.0	-25.9	Peak	Vertical
*	14193.700	30.8	18.7	49.5	88.2	-38.7	Peak	Vertical
*	15021.600	31.7	18.1	49.8	88.2	-38.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-10-10
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11091.200	31.3	15.9	47.2	74.0	-26.8	Peak	Horizontal
	11735.500	31.1	16.7	47.8	74.0	-26.2	Peak	Horizontal
*	14147.800	31.0	18.9	49.9	88.2	-38.3	Peak	Horizontal
*	14955.300	32.6	18.1	50.7	88.2	-37.5	Peak	Horizontal
	11087.800	31.0	15.9	46.9	74.0	-27.1	Peak	Vertical
	11878.300	30.5	16.3	46.8	74.0	-27.2	Peak	Vertical
*	13914.900	31.9	18.0	49.9	88.2	-38.3	Peak	Vertical
*	14783.600	31.8	18.3	50.1	88.2	-38.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-10-10
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11101.400	31.9	15.9	47.8	74.0	-26.2	Peak	Horizontal
	11810.300	30.9	16.7	47.6	74.0	-26.4	Peak	Horizontal
*	13862.200	30.4	18.5	48.9	88.2	-39.3	Peak	Horizontal
*	14838.000	31.1	18.8	49.9	88.2	-38.3	Peak	Horizontal
	11074.200	31.0	15.7	46.7	74.0	-27.3	Peak	Vertical
	12048.300	30.8	16.0	46.8	74.0	-27.2	Peak	Vertical
*	14064.500	30.4	18.5	48.9	88.2	-39.3	Peak	Vertical
*	14934.900	30.9	18.7	49.6	88.2	-38.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WZ-AC2	Test Date	2024-10-10
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11266.300	30.4	16.2	46.6	74.0	-27.4	Peak	Horizontal
	12148.600	30.8	16.3	47.1	74.0	-26.9	Peak	Horizontal
*	14032.200	30.6	18.8	49.4	88.2	-38.8	Peak	Horizontal
*	14928.100	31.6	18.6	50.2	88.2	-38.0	Peak	Horizontal
	11001.100	31.3	15.8	47.1	74.0	-26.9	Peak	Vertical
	11766.100	32.1	16.2	48.3	74.0	-25.7	Peak	Vertical
*	13862.200	31.2	18.5	49.7	88.2	-38.5	Peak	Vertical
*	14839.700	31.1	18.8	49.9	88.2	-38.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-10-10
Test Mode	802.11be-EHT320	Test Channel	31
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11410.800	31.3	16.6	47.9	74.0	-26.1	Peak	Horizontal
	12077.200	32.3	16.0	48.3	74.0	-25.7	Peak	Horizontal
*	14139.300	30.7	19.1	49.8	88.2	-38.4	Peak	Horizontal
*	14972.300	32.4	17.8	50.2	88.2	-38.0	Peak	Horizontal
	11159.200	31.3	16.1	47.4	74.0	-26.6	Peak	Vertical
	12068.700	33.5	16.0	49.5	74.0	-24.5	Peak	Vertical
*	14064.500	30.6	18.5	49.1	88.2	-39.1	Peak	Vertical
*	14926.400	32.2	18.6	50.8	88.2	-37.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	Access Point	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2024-10-10
Test Mode	802.11be-EHT320	Test Channel	63
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10997.700	31.6	15.7	47.3	74.0	-26.7	Peak	Horizontal
	11492.400	31.9	16.6	48.5	74.0	-25.5	Peak	Horizontal
*	14044.100	30.9	18.8	49.7	88.2	-38.5	Peak	Horizontal
*	14941.700	31.6	18.7	50.3	88.2	-37.9	Peak	Horizontal
	11086.100	31.9	15.9	47.8	74.0	-26.2	Peak	Vertical
	12072.100	31.7	16.0	47.7	74.0	-26.3	Peak	Vertical
*	14049.200	31.2	18.7	49.9	88.2	-38.3	Peak	Vertical
*	14849.900	31.8	18.6	50.4	88.2	-37.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

The Result of Radiated Emission for 9kHz ~ 30MHz:

Site	WZ-AC2	Test Date	2024-10-11
Test Engineer	Dick Shen	Temp./Humidity	26.6°C /52.9%
Factor	FMZB1519B_9kHz-30MHz-SIP	Polarity	Coaxial
EUT	ACCESS POINT	Test Voltage	AC 120V/60H
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

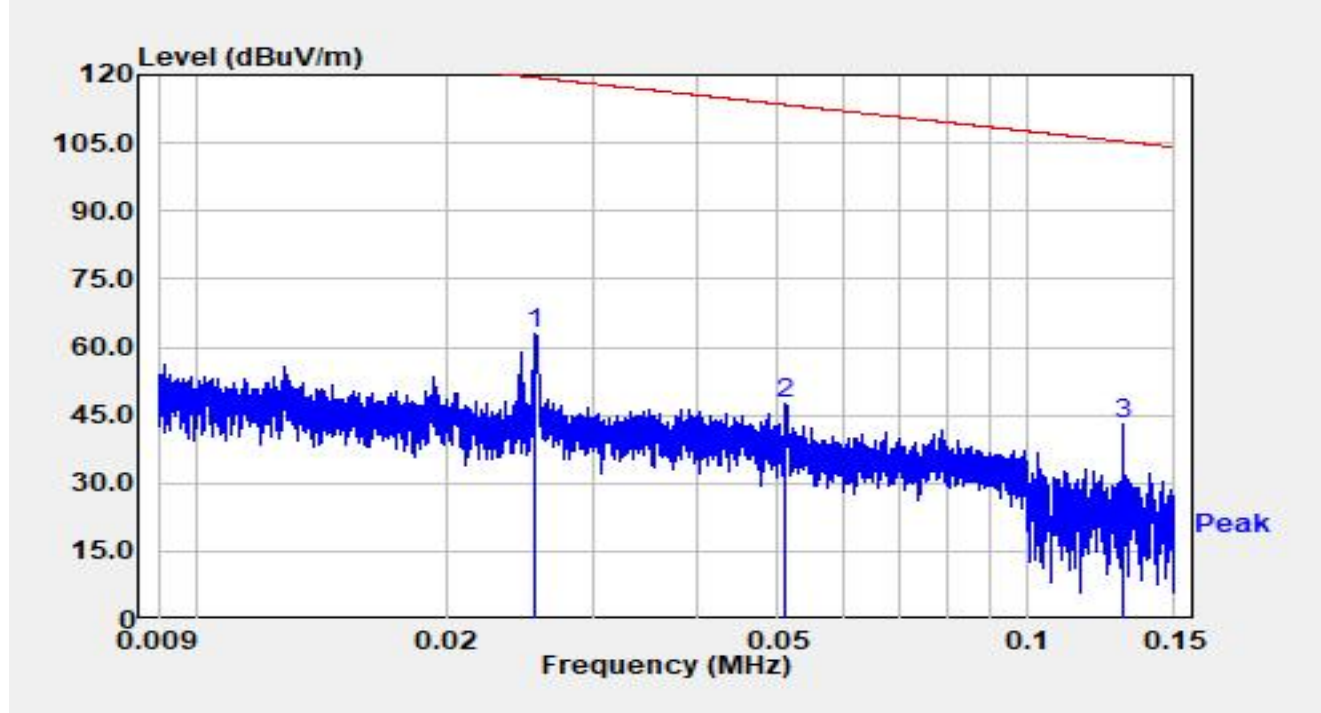


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	0.026	43.02	19.79	62.81	-56.62	119.43	Peak
2		0.051	28.46	19.22	47.68	-65.76	113.44	Peak
3		0.130	23.77	19.09	42.86	-62.45	105.31	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-10-11
Test Engineer	Dick Shen	Temp./Humidity	26.6°C /52.9%
Factor	FMZB1519B_9kHz-30MHz-SIP	Polarity	Coaxial
EUT	ACCESS POINT	Test Voltage	AC 120V/60H
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

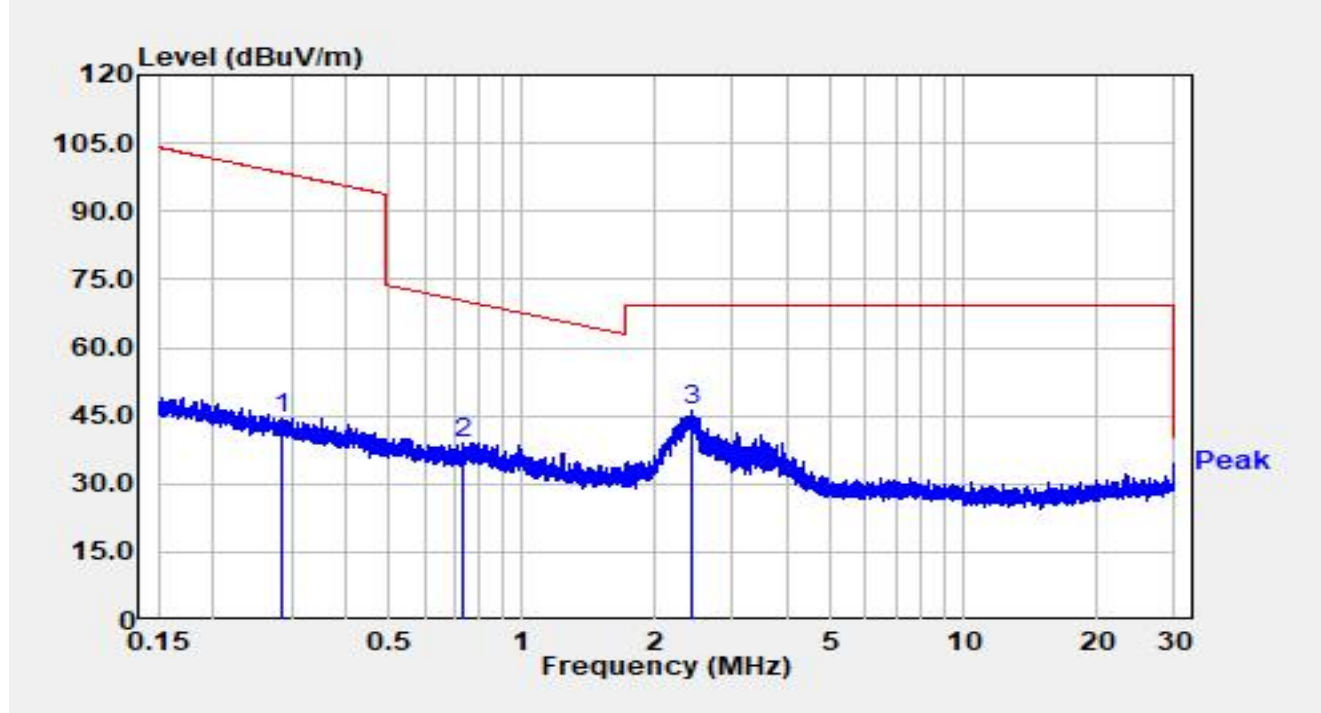


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.286	25.27	19.05	44.33	-54.16	98.48	Peak
2		0.737	19.90	19.06	38.97	-31.30	70.27	Peak
3	*	2.410	26.73	19.24	45.96	-23.54	69.50	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-10-11
Test Engineer	Dick Shen	Temp./Humidity	26.6°C /52.9%
Factor	FMZB1519B_9kHz-30MHz-SIP	Polarity	Coplanar
EUT	ACCESS POINT	Test Voltage	AC 120V/60H
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

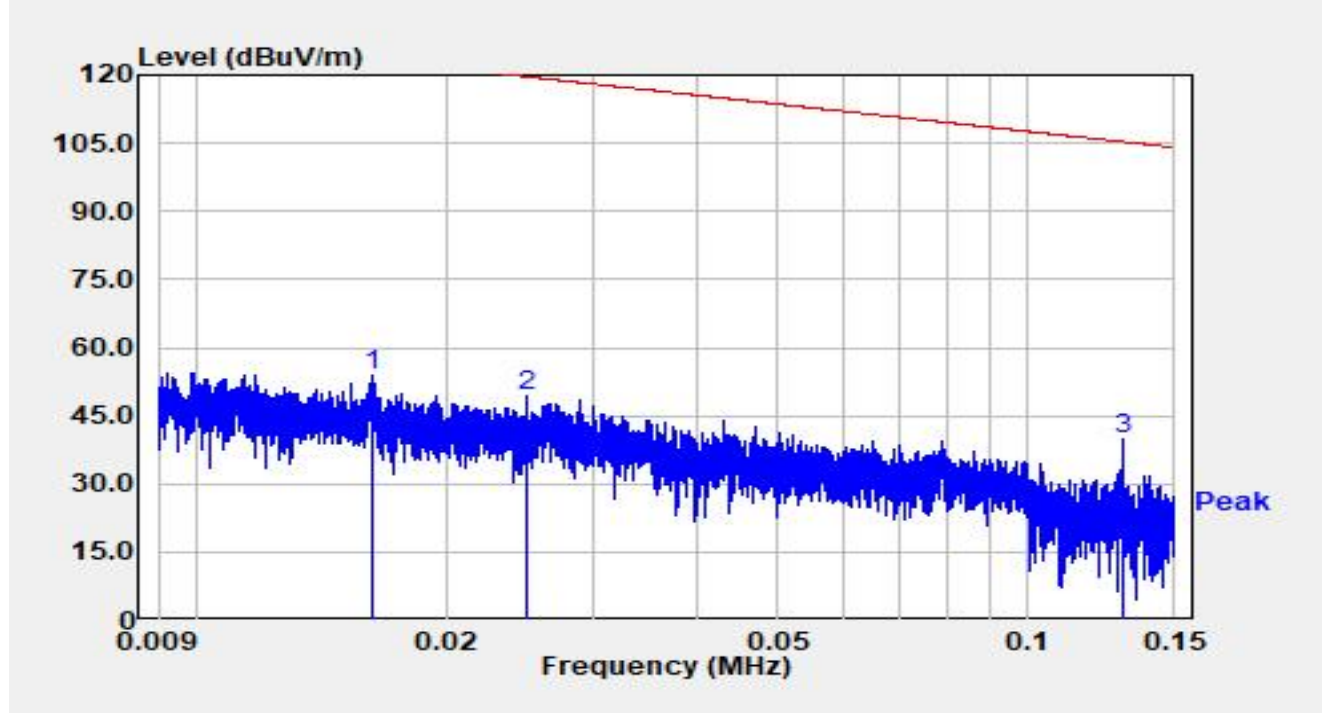


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.016	33.73	20.16	53.89	-69.47	123.36	Peak
2		0.025	29.59	19.81	49.40	-70.23	119.63	Peak
3	*	0.130	20.73	19.09	39.81	-65.49	105.31	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-10-11
Test Engineer	Dick Shen	Temp./Humidity	26.6°C /52.9%
Factor	FMZB1519B_9kHz-30MHz-SIP	Polarity	Coplanar
EUT	ACCESS POINT	Test Voltage	AC 120V/60H
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

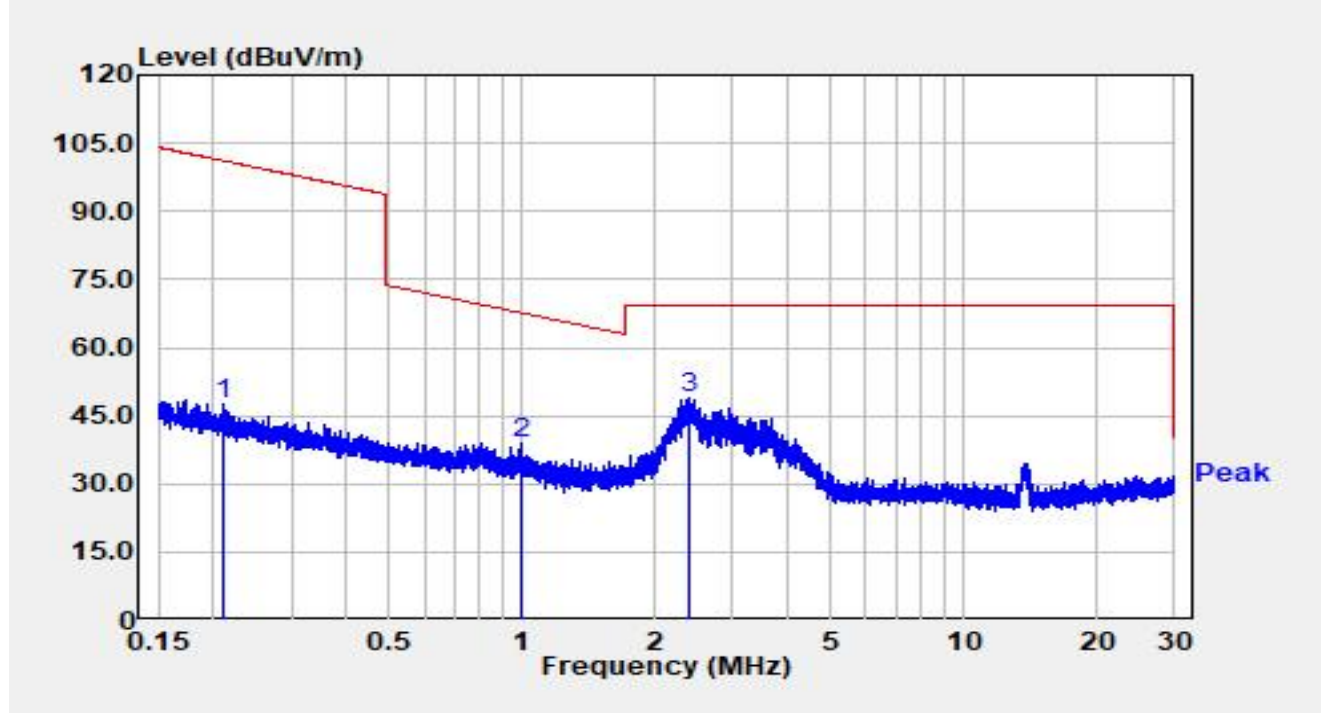


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.211	28.42	19.07	47.48	-53.65	101.13	Peak
2		0.994	20.01	19.10	39.11	-28.57	67.67	Peak
3	*	2.389	29.45	19.23	48.69	-20.81	69.50	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission for 30MHz ~ 1GHz:

Site	WZ-AC2	Test Date	2024-10-11
Test Engineer	Dick Shen	Temp./Humidity	26.6°C /52.9%
Factor	VULB 9162_30-7000MHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60H
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

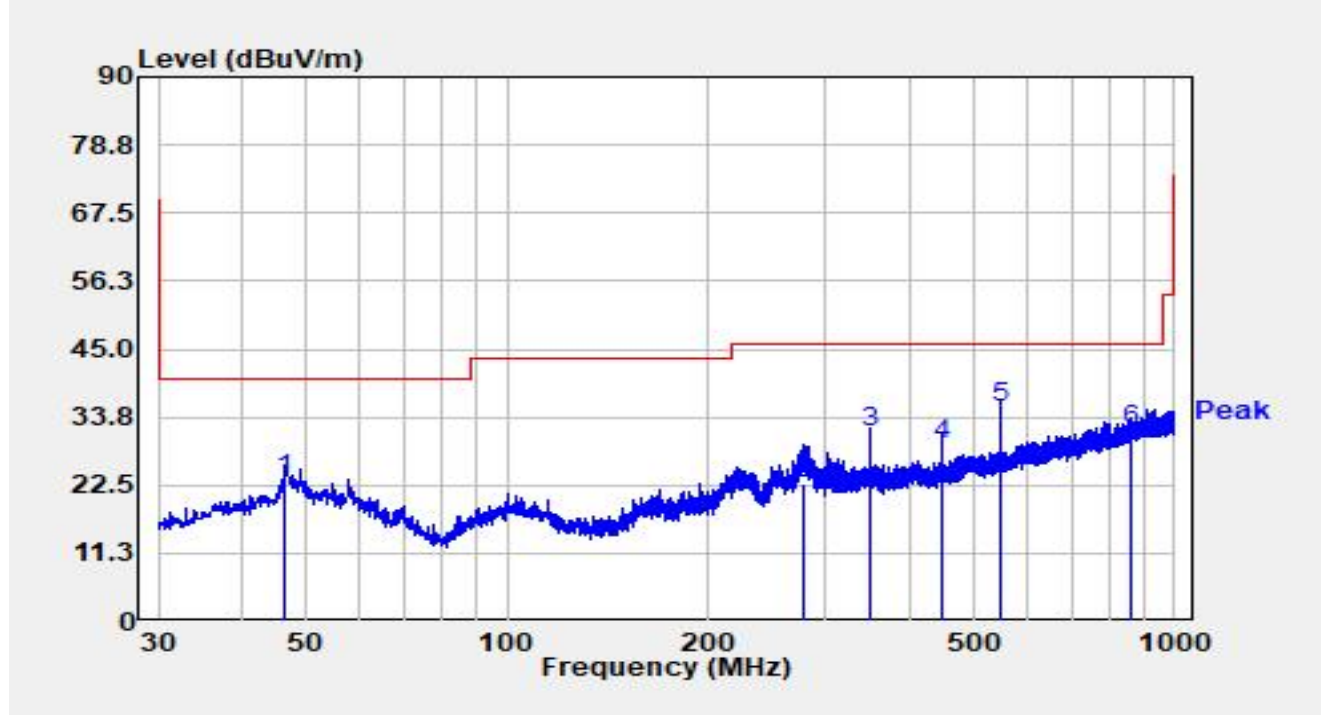


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		46.395	3.10	20.37	23.47	-16.53	40.00	QP
2		279.024	2.10	20.52	22.62	-23.38	46.00	QP
3		350.035	8.50	22.81	31.31	-14.69	46.00	QP
4		449.955	5.10	24.04	29.14	-16.86	46.00	QP
5	*	549.972	9.20	26.17	35.37	-10.63	46.00	QP
6		860.985	0.20	31.37	31.57	-14.43	46.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-10-11
Test Engineer	Dick Shen	Temp./Humidity	26.6°C /52.9%
Factor	VULB 9162_30-7000MHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60H
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

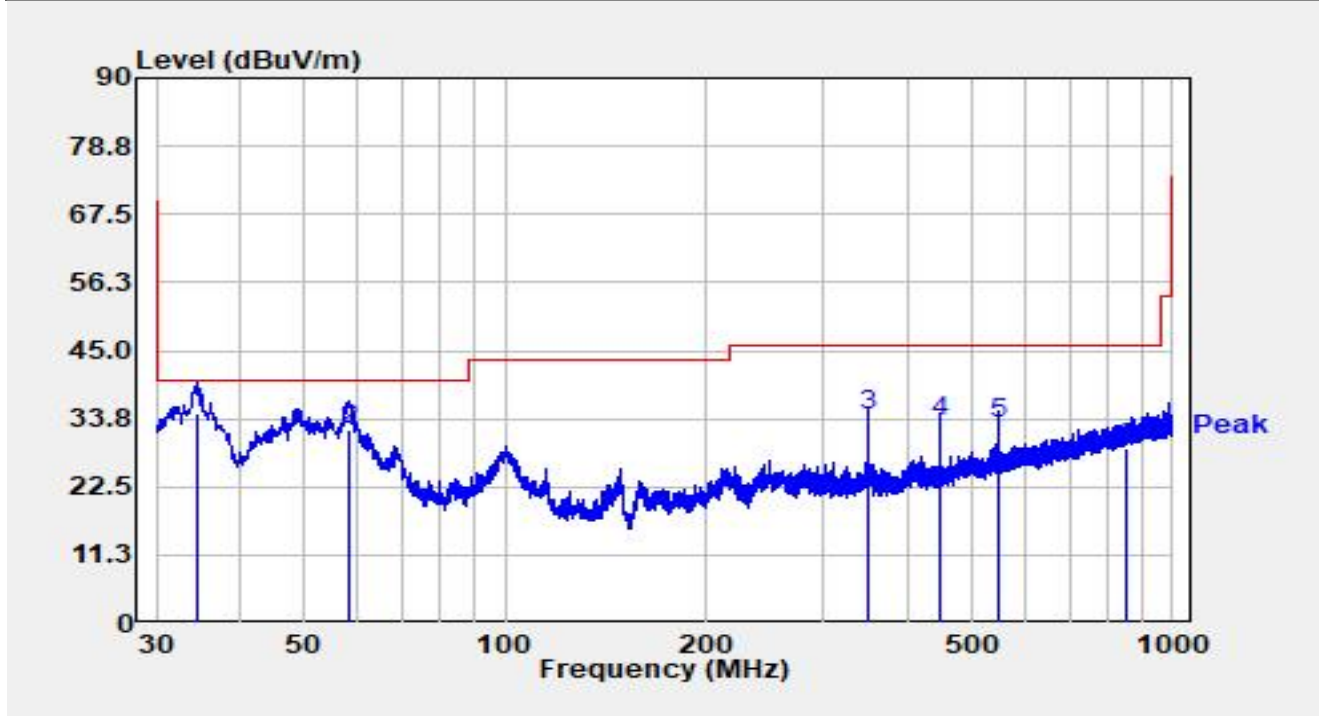


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	34.656	17.30	17.50	34.80	-5.20	40.00	QP
2		58.230	12.10	19.71	31.81	-8.19	40.00	QP
3		350.035	11.50	22.81	34.31	-11.69	46.00	QP
4		450.052	9.10	24.04	33.14	-12.86	46.00	QP
5		549.972	6.90	26.17	33.07	-12.93	46.00	QP
6		854.486	-2.40	31.30	28.90	-17.10	46.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-10-11
Test Engineer	Dick Shen	Temp./Humidity	26.6°C /52.9%
Factor	BBHA 9170_549_18-40GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60H
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

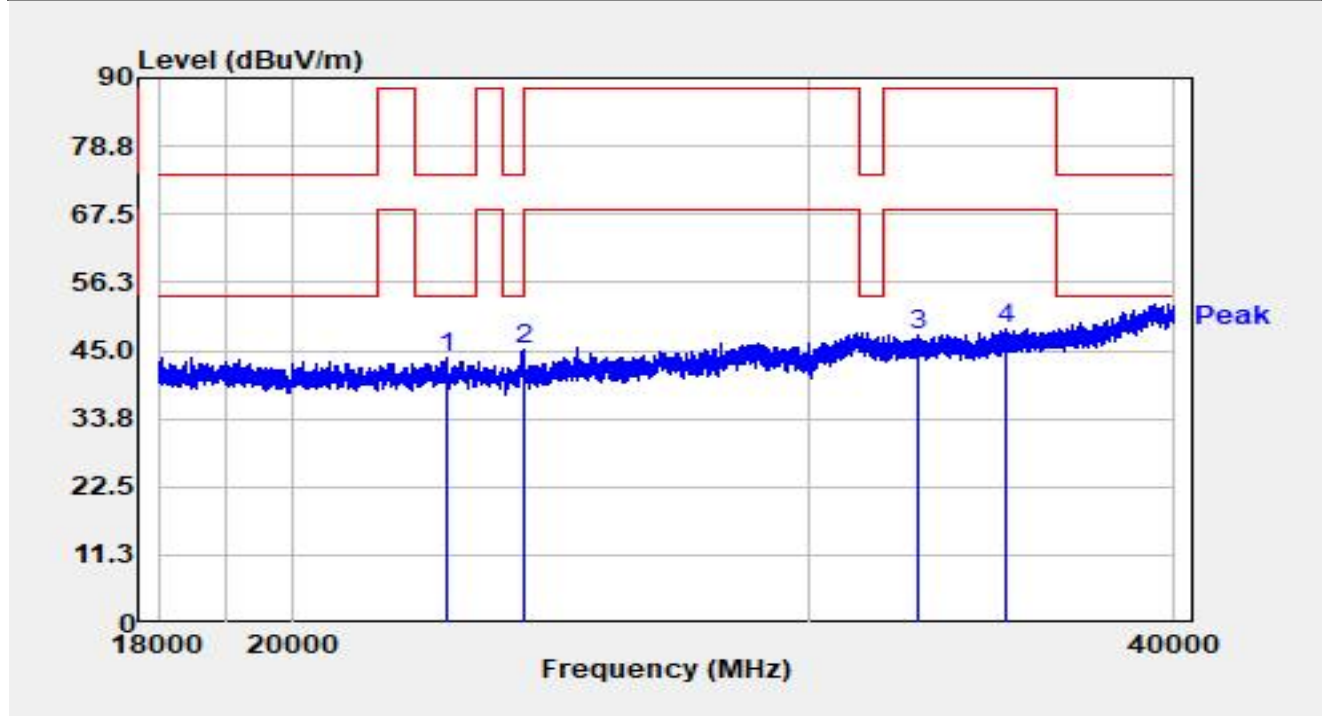


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		22562.800	51.10	-7.20	43.90	-30.10	74.00	Peak
2	*	23999.400	51.84	-6.50	45.34	-28.66	74.00	Peak
3		32715.800	52.48	-4.86	47.62	-40.58	88.20	Peak
4		35063.200	54.02	-5.56	48.47	-39.73	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-10-11
Test Engineer	Dick Shen	Temp./Humidity	26.6°C /52.9%
Factor	BBHA 9170_549_18-40GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60H
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

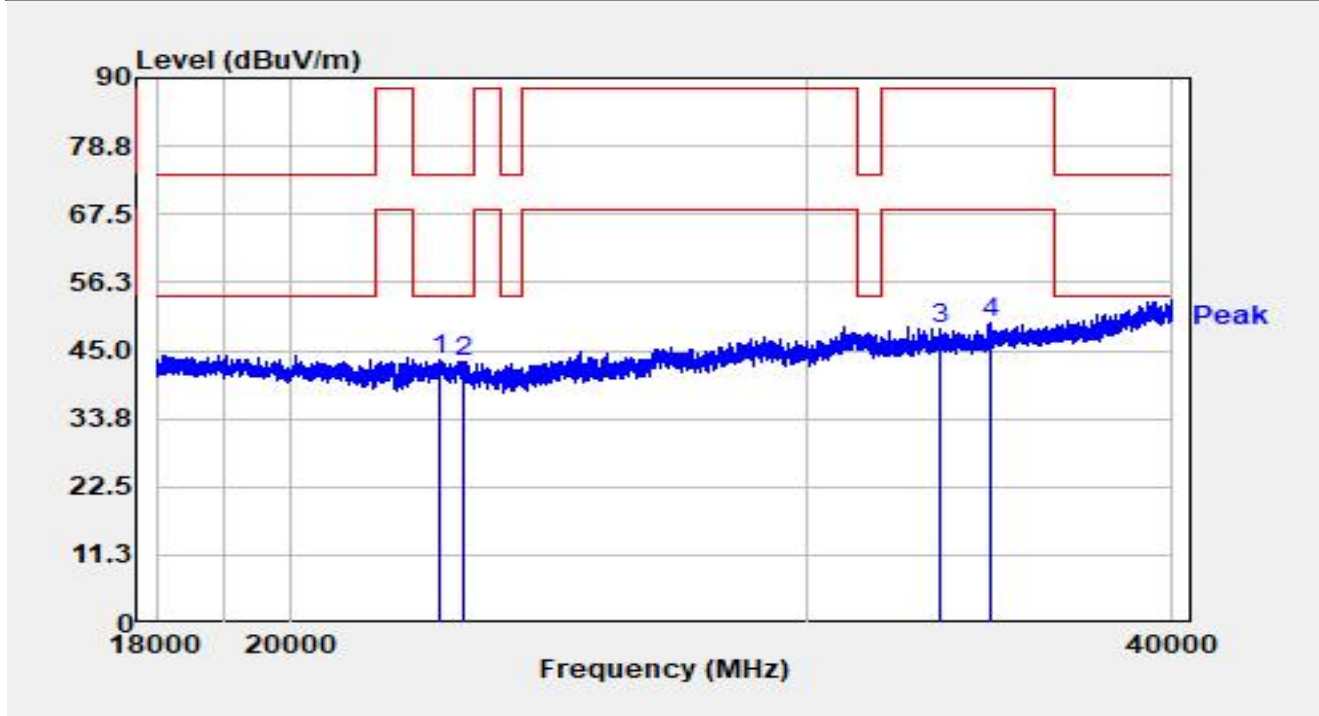

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	22494.600	51.05	-7.56	43.50	-30.50	74.00	Peak
2		22895.000	50.02	-6.79	43.24	-30.76	74.00	Peak
3		33305.400	53.41	-4.89	48.52	-39.68	88.20	Peak
4		34680.400	55.02	-5.28	49.73	-38.47	88.20	Peak

Notes:


1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 Radiated Restricted Band Edge Test Result

Normal Mode

Antenna_311:

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

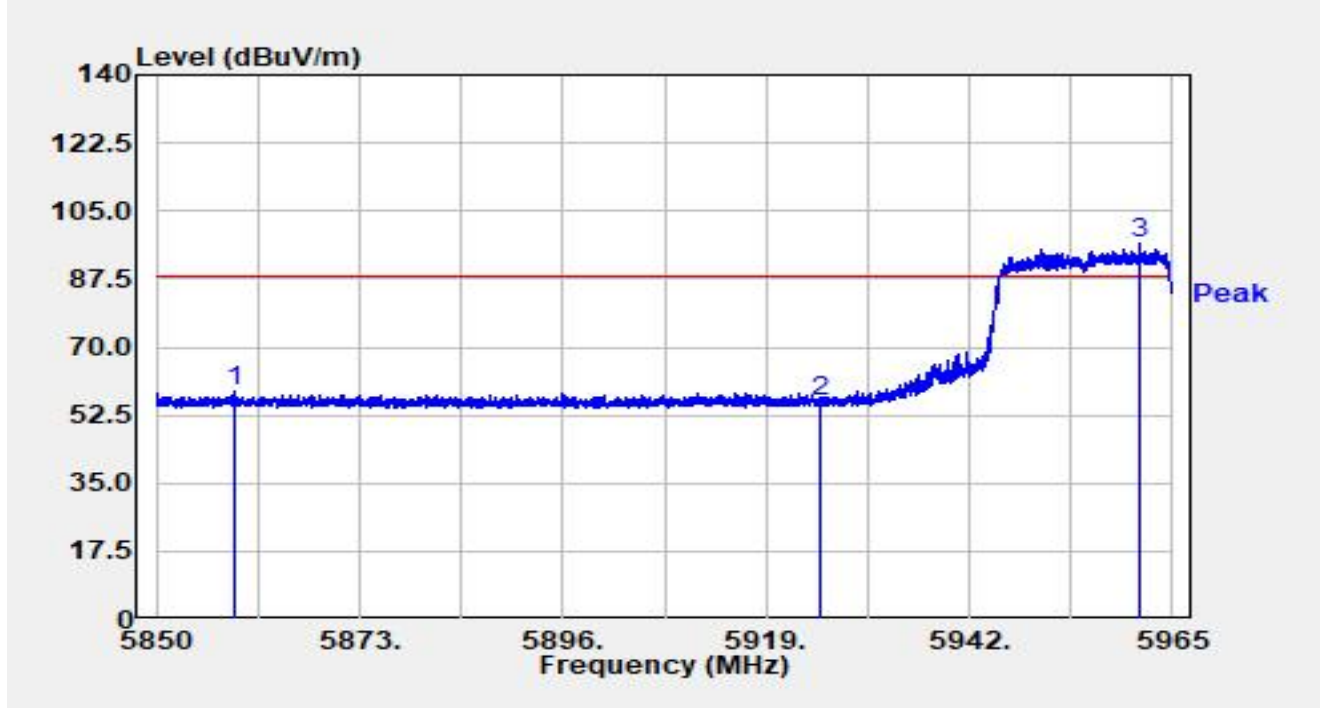


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5858.958	36.90	21.58	58.49	-29.71	88.20	Peak
2		5925.003	34.33	21.55	55.88	-32.32	88.20	Peak
3		5961.251	75.15	21.35	96.50	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

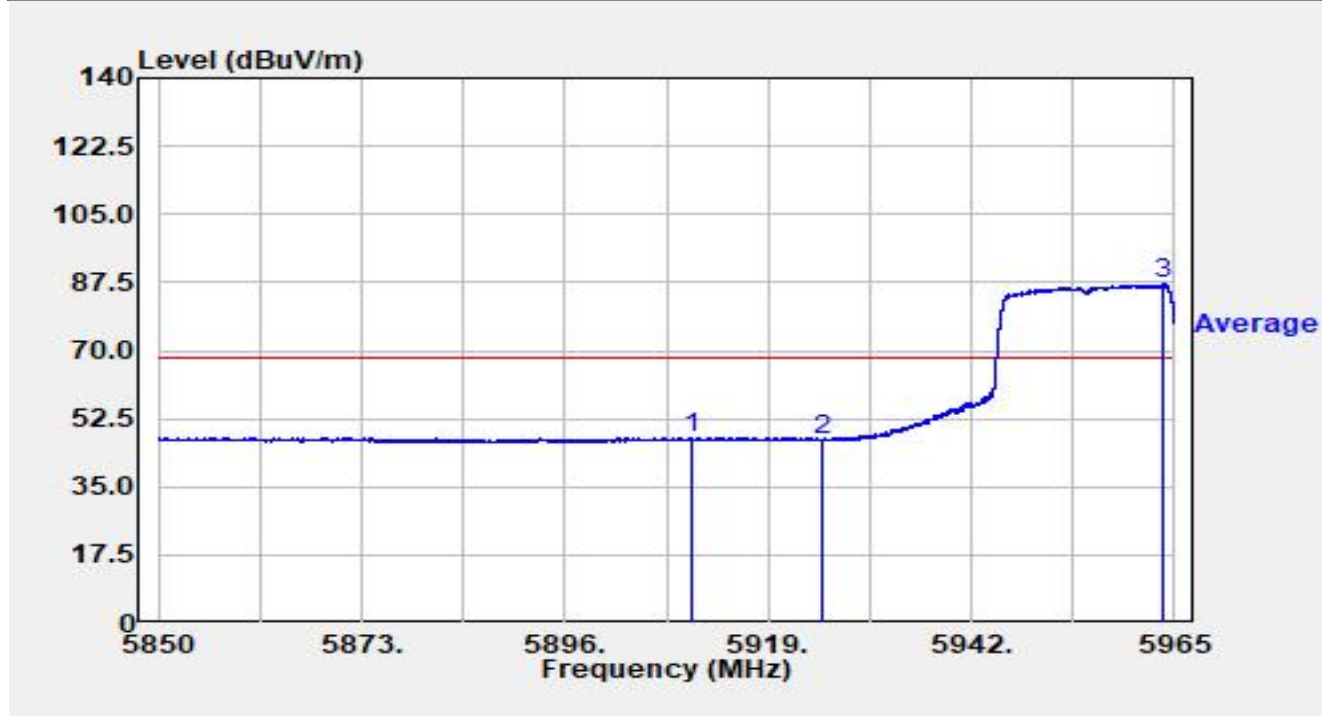


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5910.410	26.23	21.48	47.71	-20.49	68.20	Average
2		5925.003	25.68	21.55	47.24	-20.96	68.20	Average
3		5963.608	65.61	21.32	86.94	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

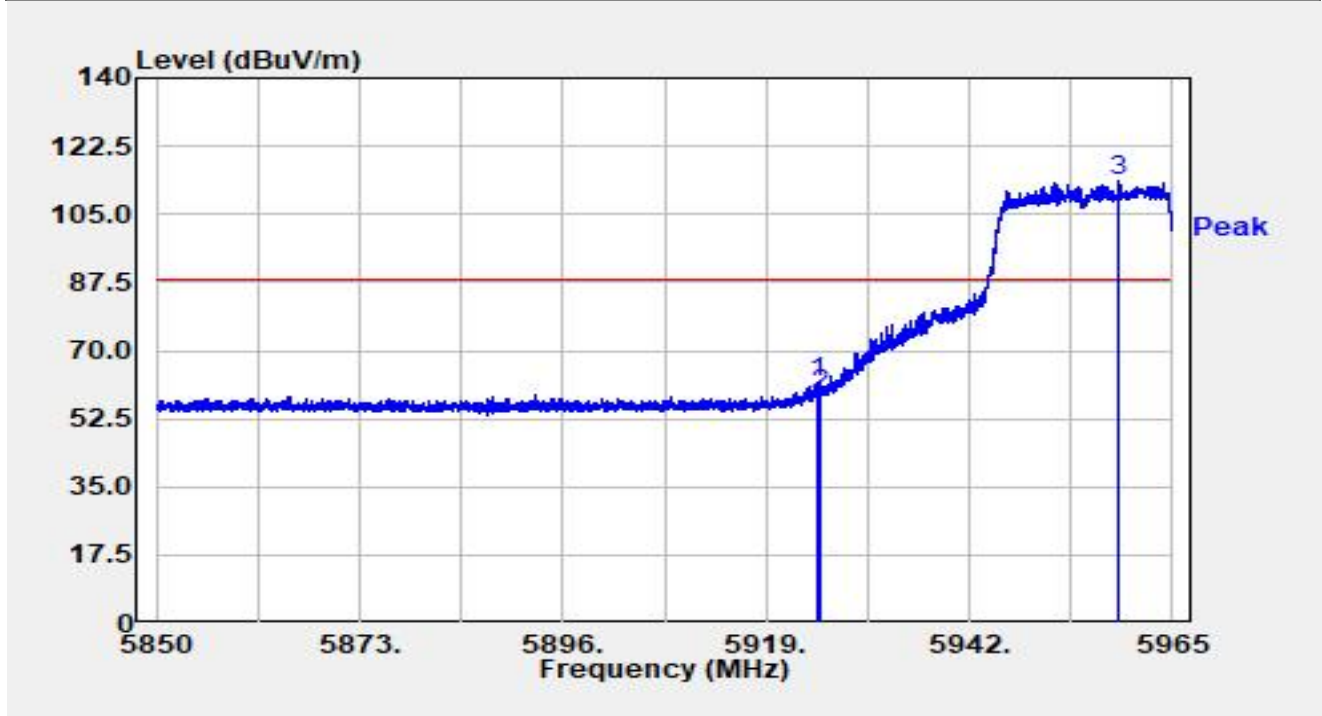


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.865	40.12	21.55	61.67	-26.53	88.20	Peak
2		5925.003	37.30	21.55	58.85	-29.35	88.20	Peak
3		5958.928	92.21	21.37	113.59	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

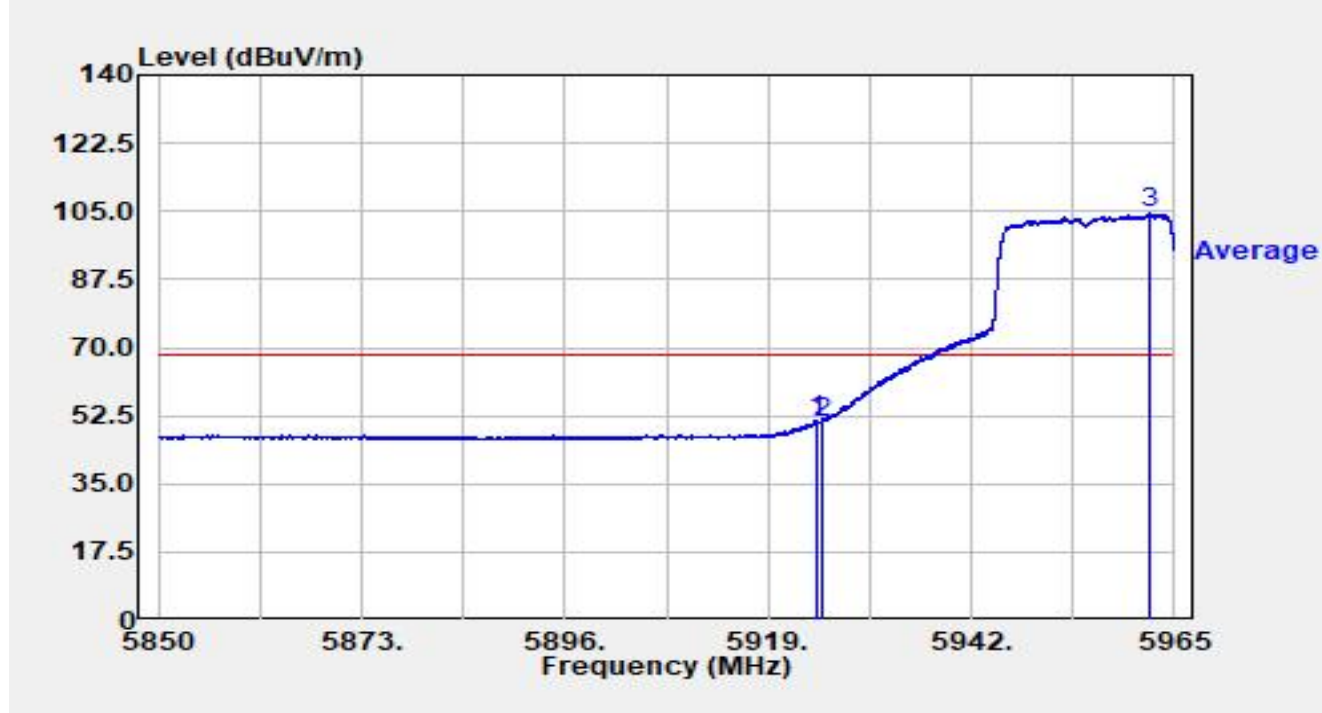


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.646	29.53	21.55	51.08	-17.12	68.20	Average
2		5925.003	29.23	21.55	50.78	-17.42	68.20	Average
3		5962.217	83.04	21.34	104.38	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

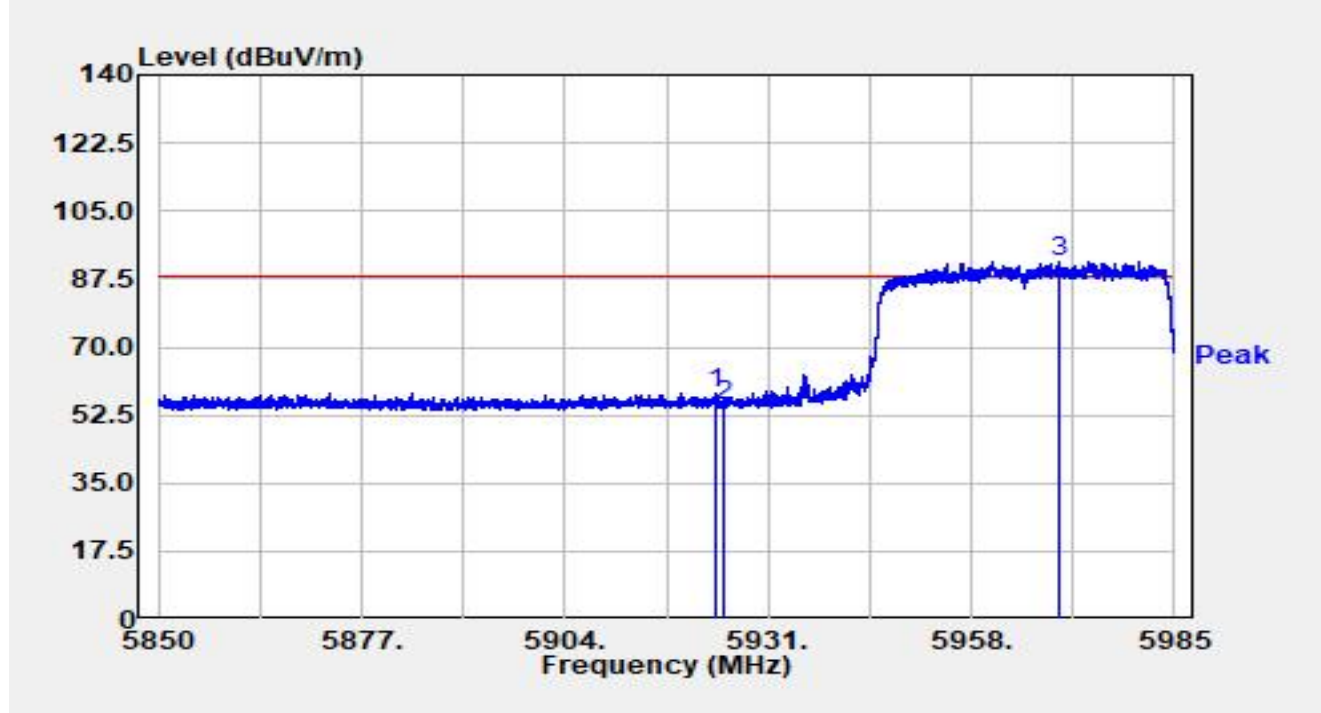


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5924.128	36.76	21.56	58.32	-29.88	88.20	Peak
2		5925.006	33.60	21.55	55.15	-33.05	88.20	Peak
3		5969.556	70.74	21.33	92.07	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

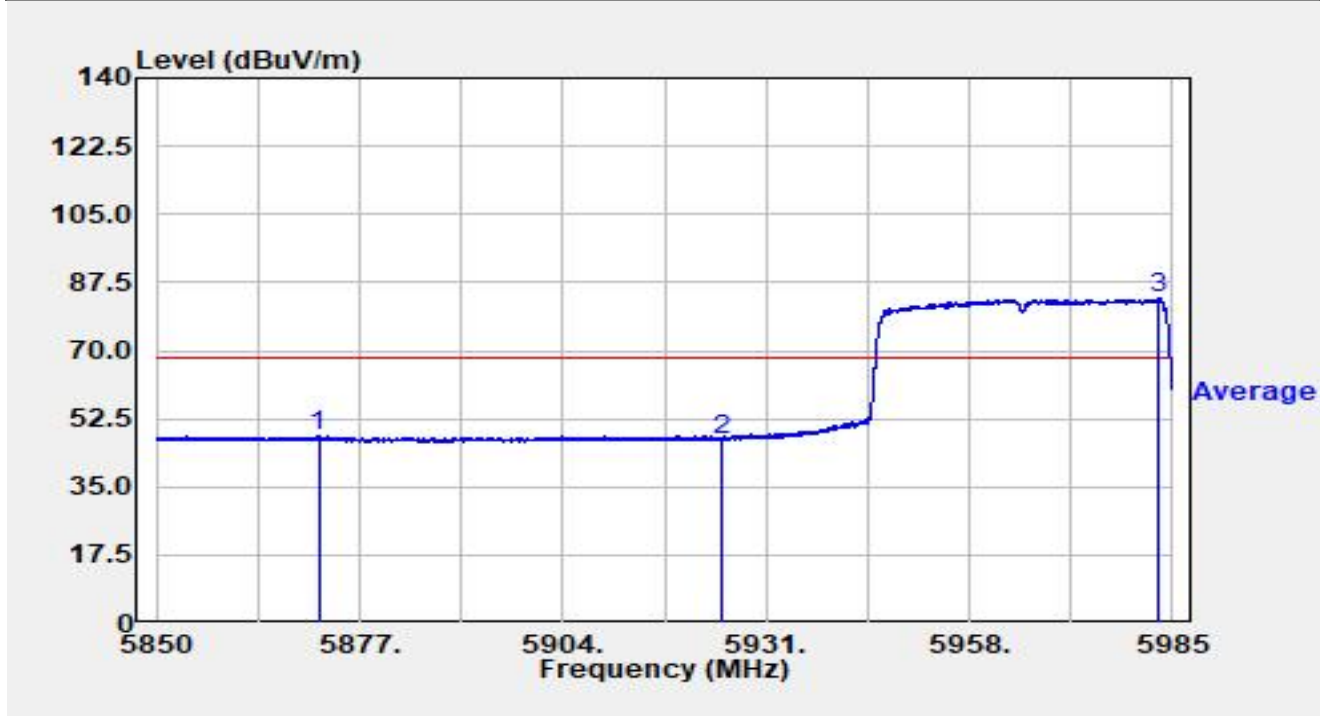


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5871.533	26.52	21.50	48.02	-20.18	68.20	Average
2		5925.006	25.68	21.55	47.23	-20.97	68.20	Average
3		5983.272	61.90	21.35	83.26	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

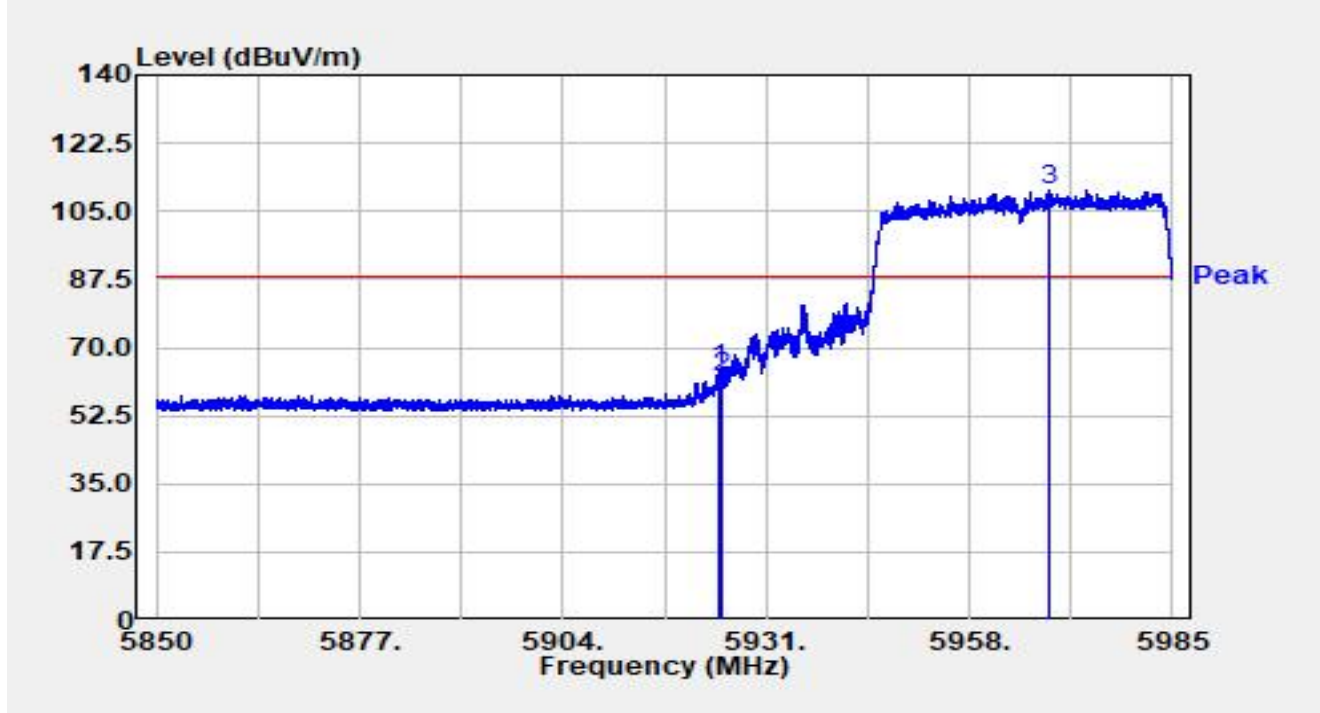


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.709	42.67	21.55	64.23	-23.97	88.20	Peak
2		5925.006	40.91	21.55	62.47	-25.73	88.20	Peak
3		5968.598	89.19	21.33	110.52	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

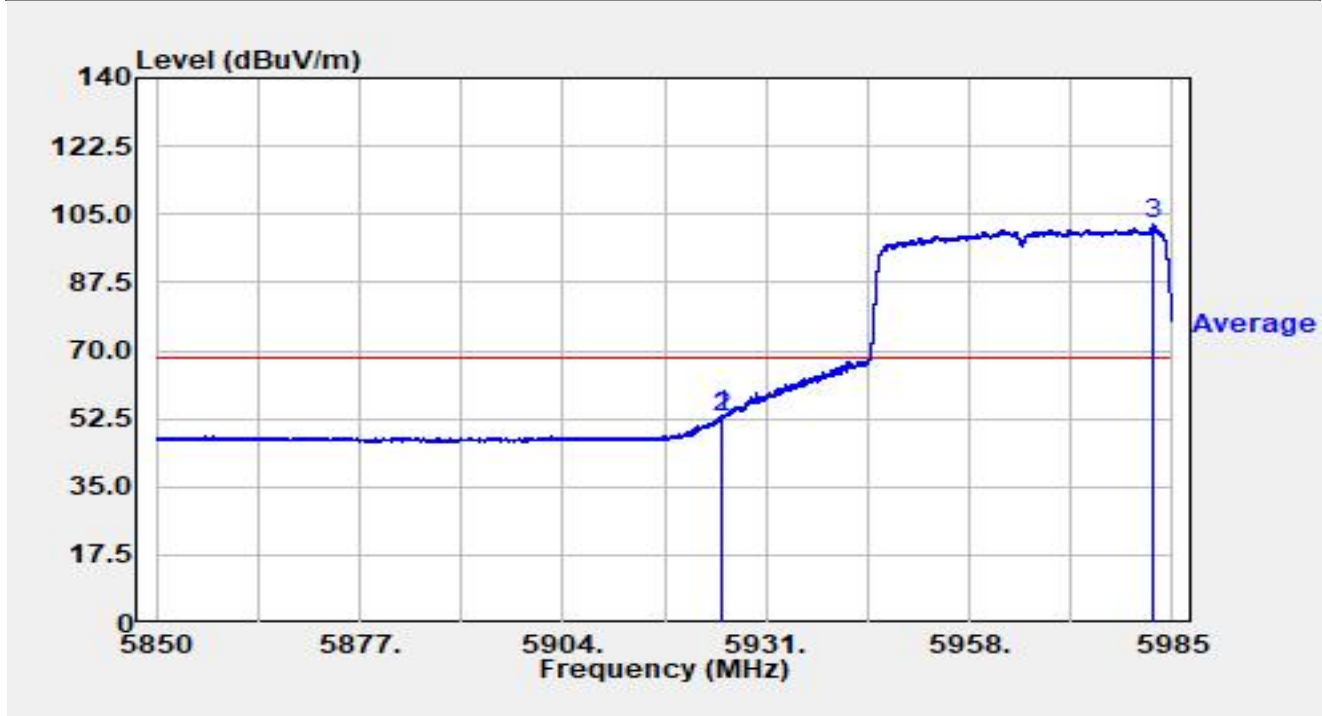


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.993	31.55	21.55	53.10	-15.10	68.20	Average
2		5925.006	31.44	21.55	52.99	-15.21	68.20	Average
3		5982.557	80.90	21.34	102.25	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

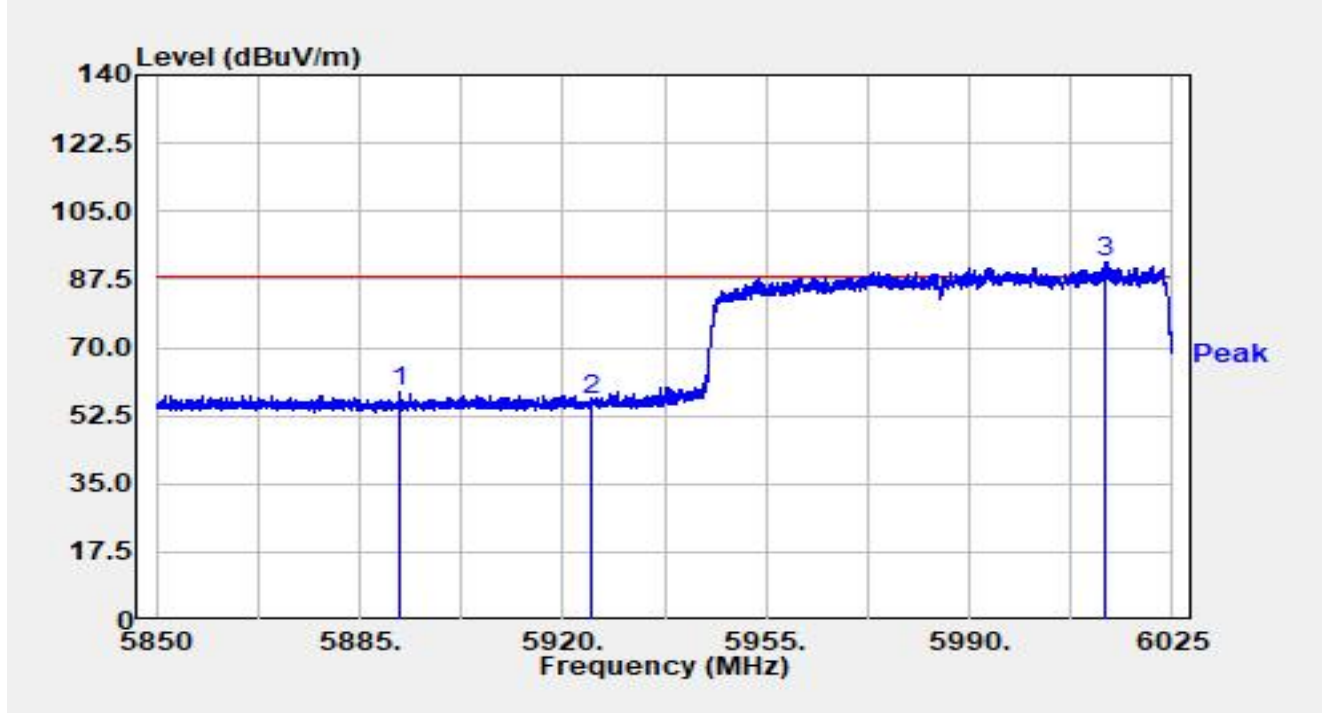


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5891.737	37.14	21.34	58.48	-29.72	88.20	Peak
2		5925.000	35.14	21.55	56.69	-31.51	88.20	Peak
3		6013.590	70.42	21.63	92.05	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

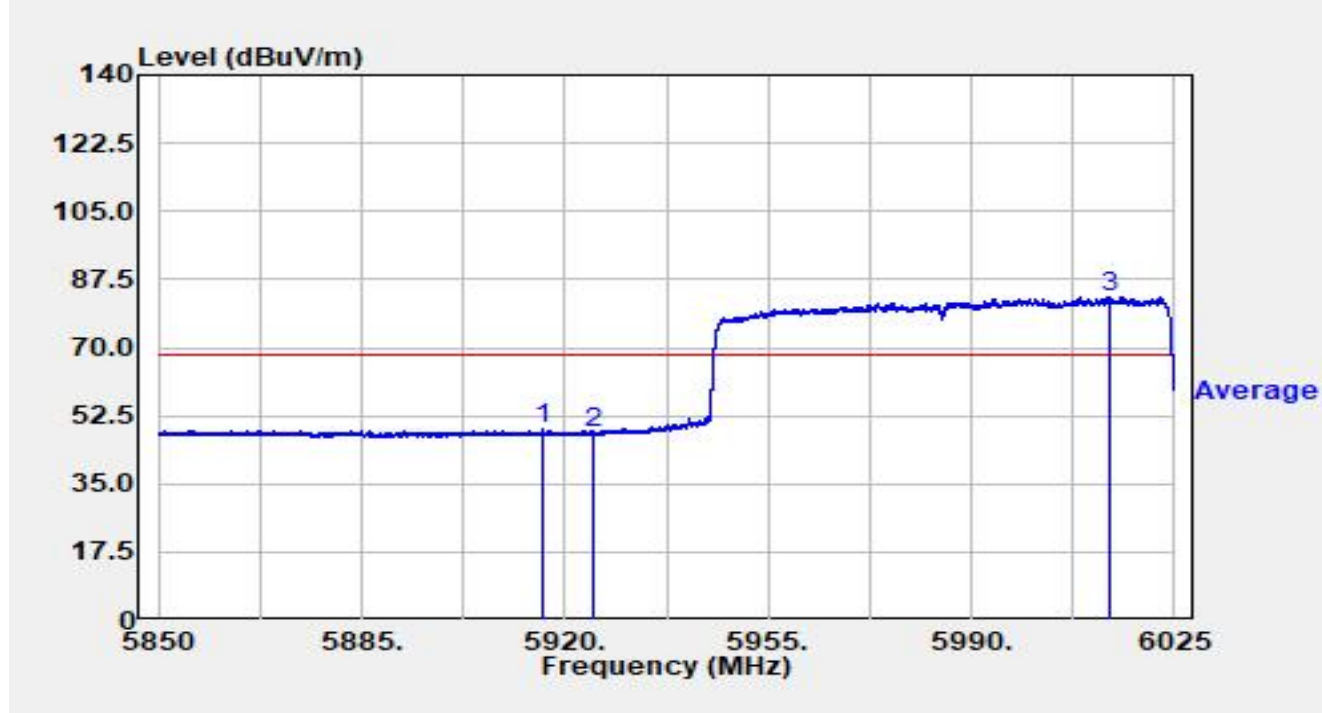


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5916.325	27.46	21.52	48.98	-19.22	68.20	Average
2		5925.005	26.29	21.55	47.85	-20.35	68.20	Average
3		6013.905	61.57	21.63	83.20	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

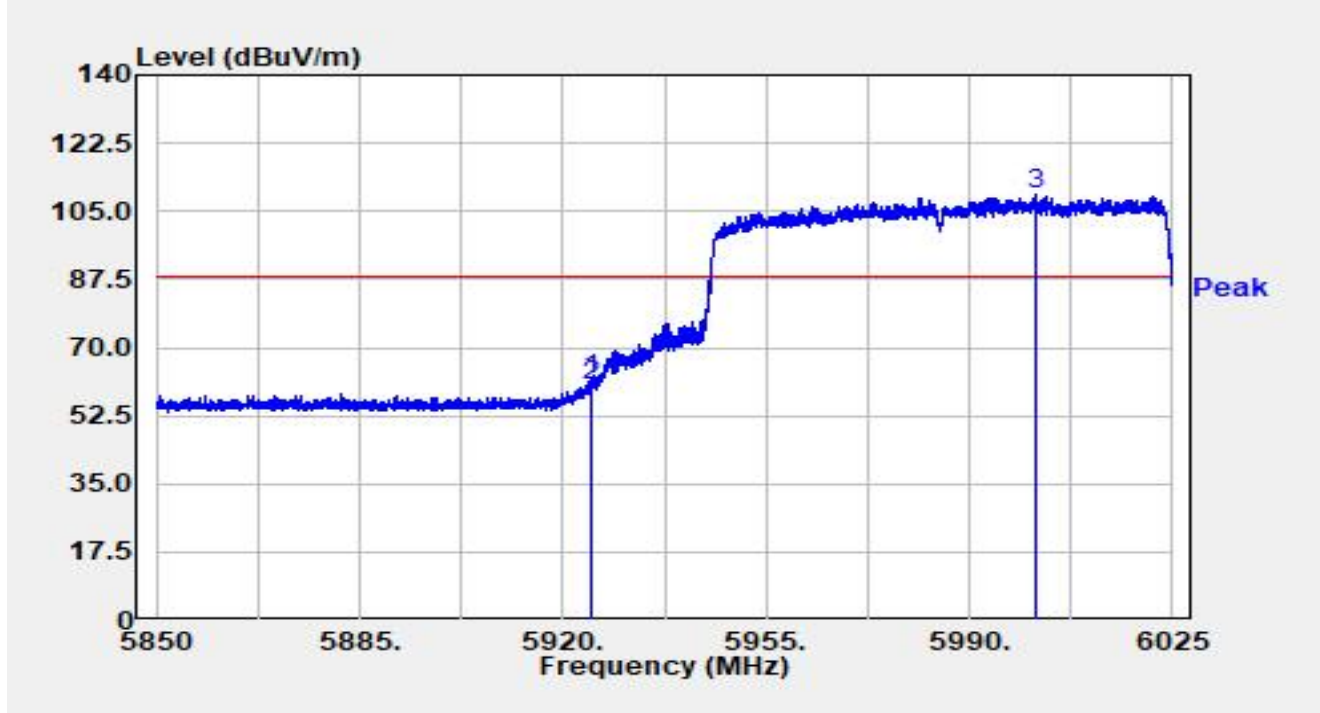


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.777	40.29	21.55	61.84	-26.36	88.20	Peak
2		5925.005	38.67	21.55	60.22	-27.98	88.20	Peak
3		6001.445	87.94	21.56	109.50	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

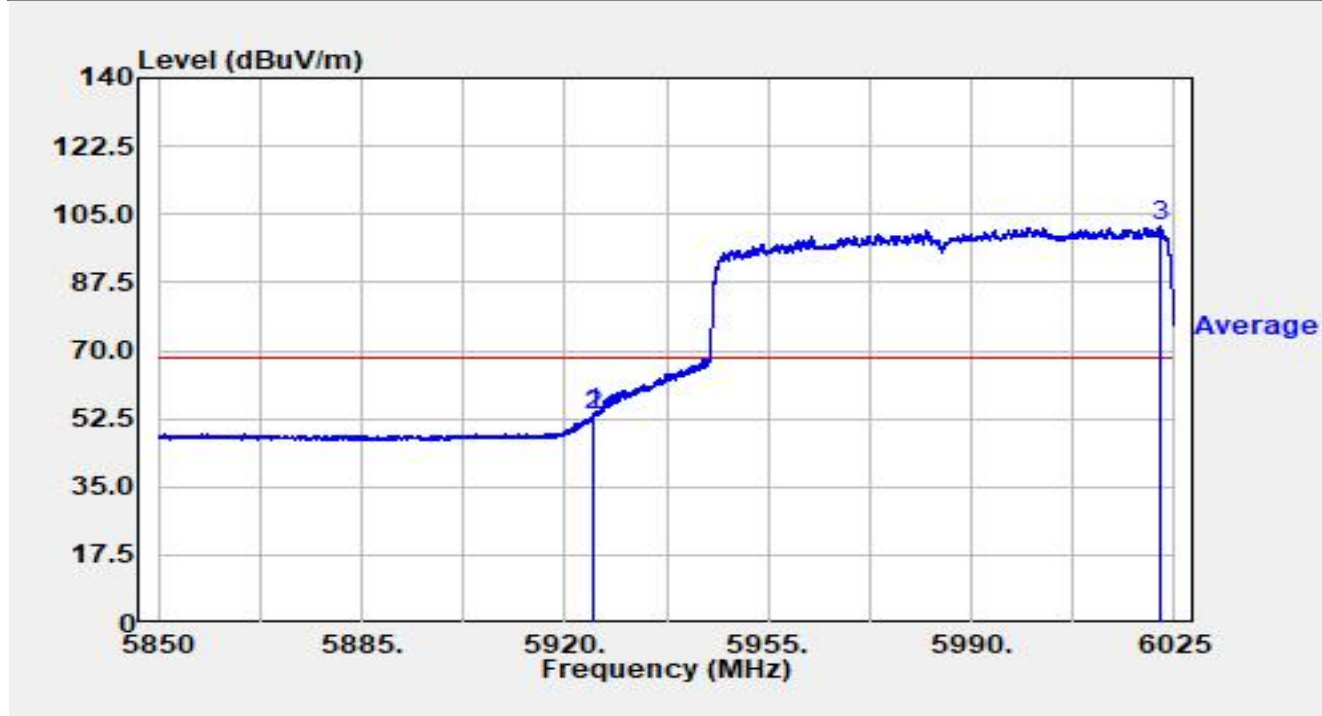


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.917	32.21	21.55	53.76	-14.44	68.20	Average
2		5925.005	31.94	21.55	53.49	-14.71	68.20	Average
3		6022.340	80.19	21.56	101.76	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

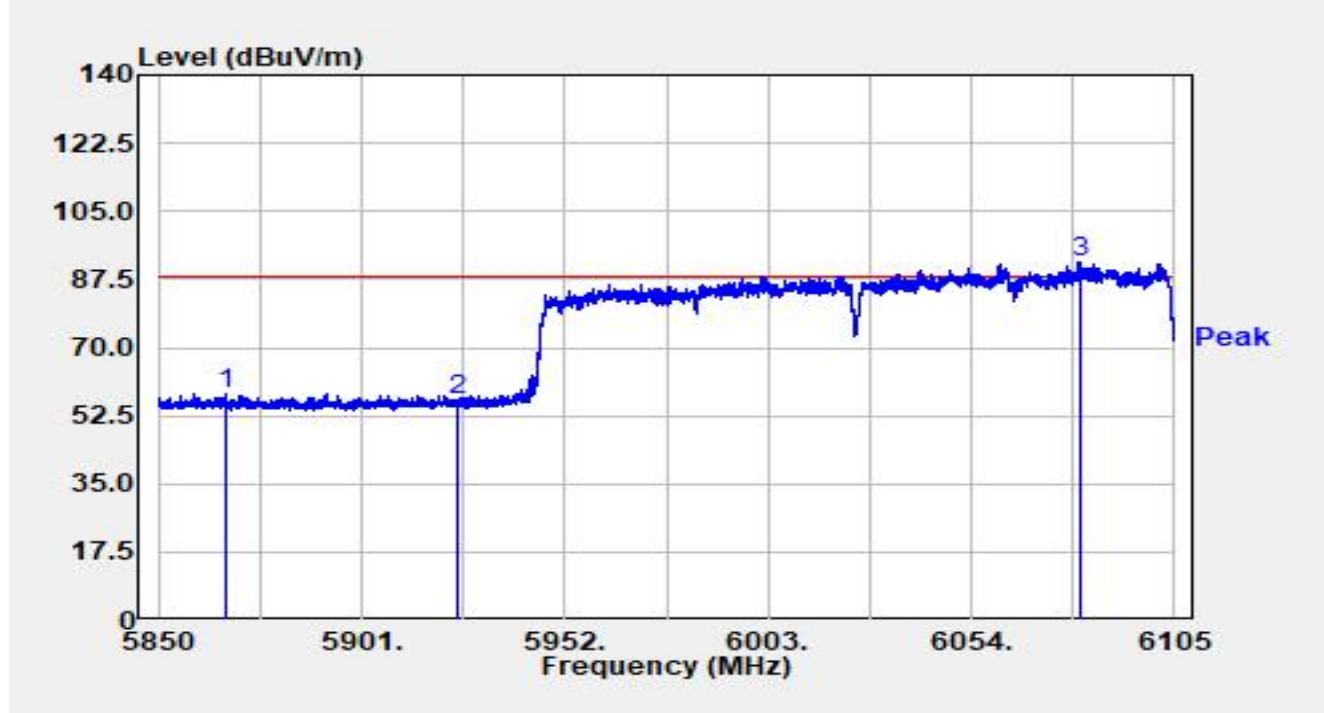


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5866.881	36.81	21.55	58.36	-29.84	88.20	Peak
2		5924.996	34.79	21.55	56.34	-31.86	88.20	Peak
3		6081.081	70.34	21.61	91.94	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

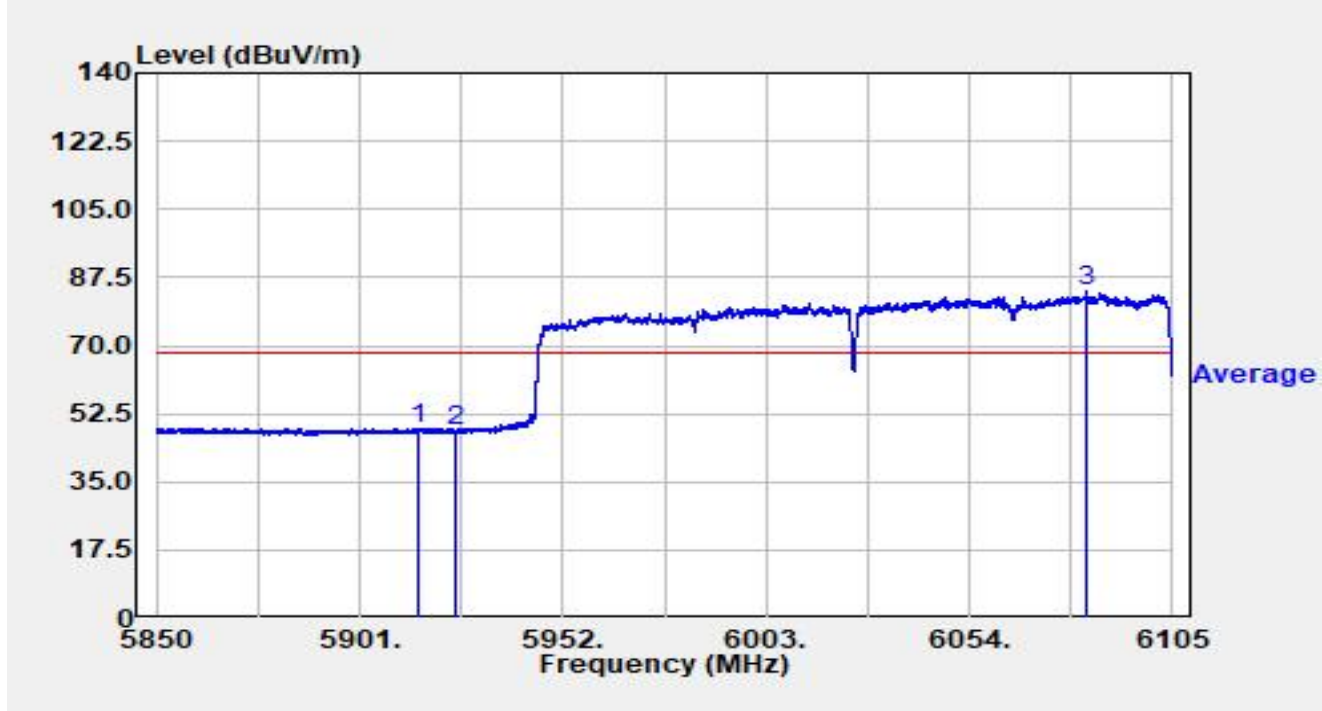


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5915.841	27.34	21.52	48.86	-19.34	68.20	Average
2		5924.996	26.62	21.55	48.18	-20.02	68.20	Average
3		6083.197	62.21	21.63	83.84	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

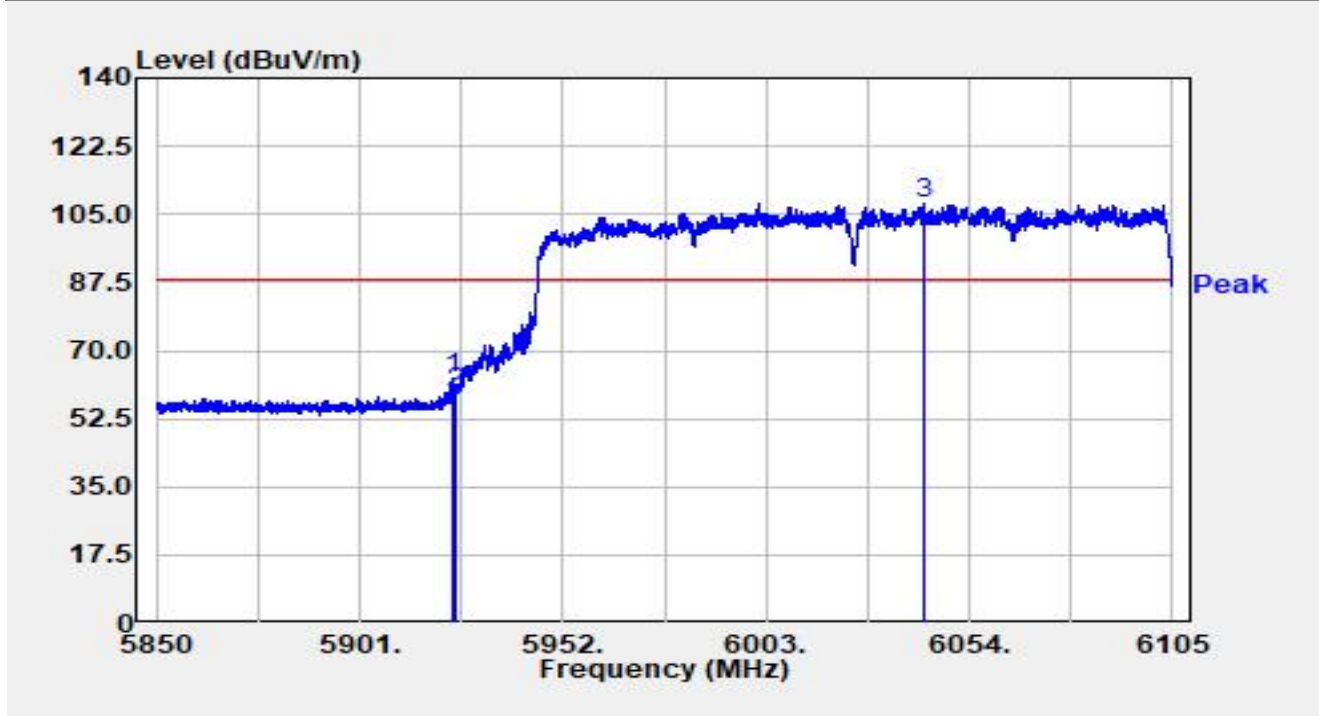


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.562	41.42	21.56	62.97	-25.23	88.20	Peak
2		5924.996	37.73	21.55	59.29	-28.91	88.20	Peak
3		6042.602	86.39	21.46	107.85	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

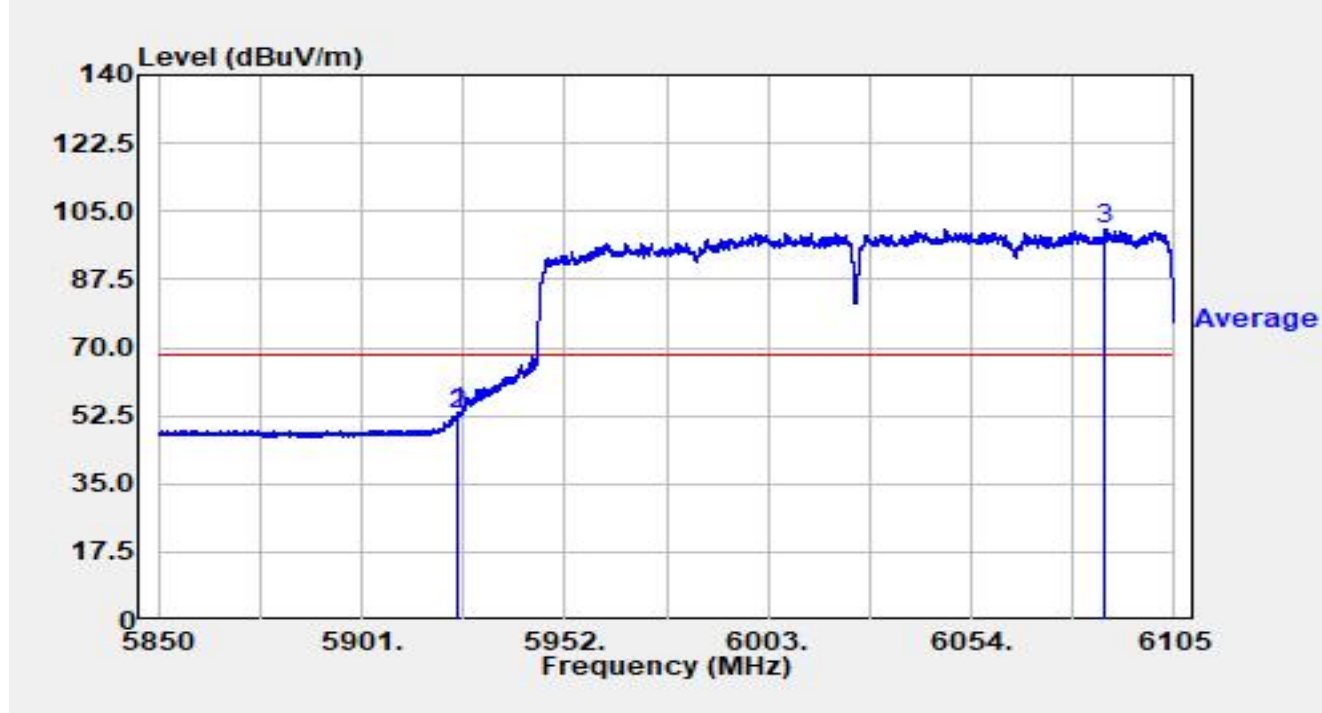


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.817	31.63	21.55	53.19	-15.01	68.20	Average
2		5925.000	31.02	21.55	52.58	-15.62	68.20	Average
3		6087.431	78.87	21.64	100.50	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

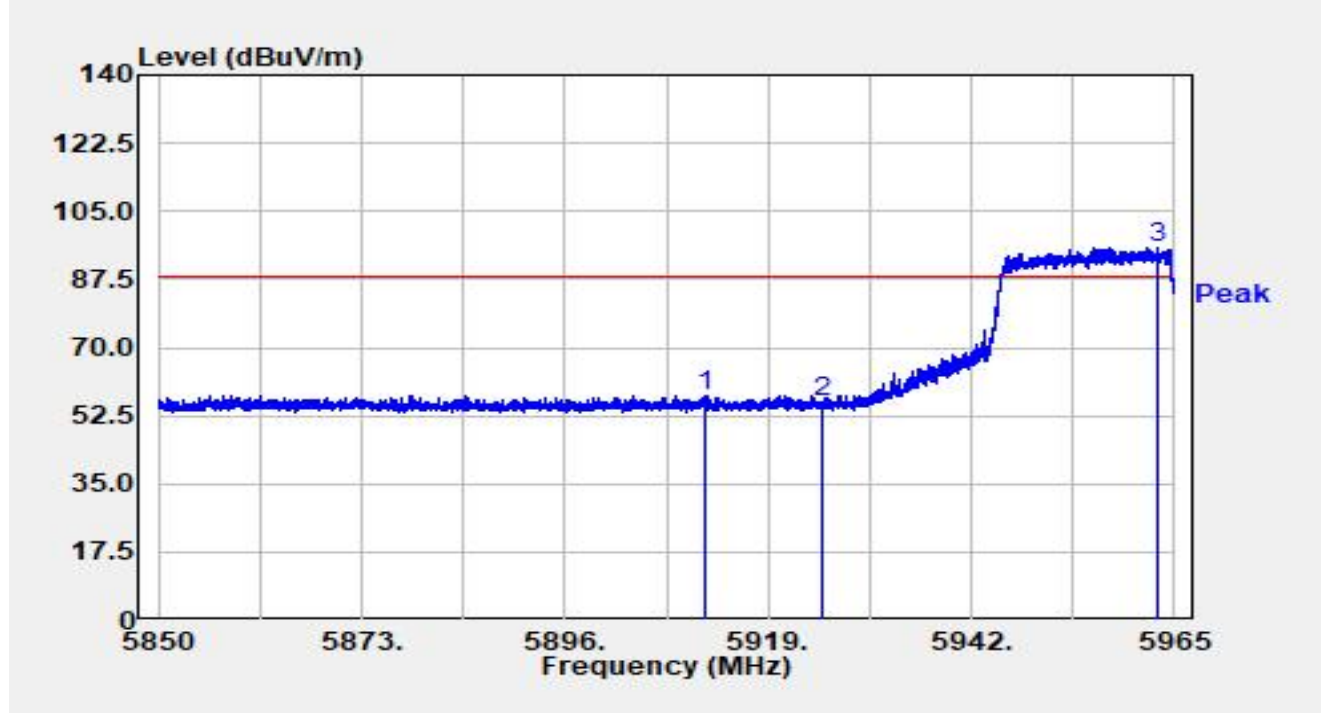


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5911.881	36.31	21.50	57.80	-30.40	88.20	Peak
2		5925.003	34.69	21.55	56.25	-31.95	88.20	Peak
3		5963.206	74.55	21.33	95.88	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-02
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

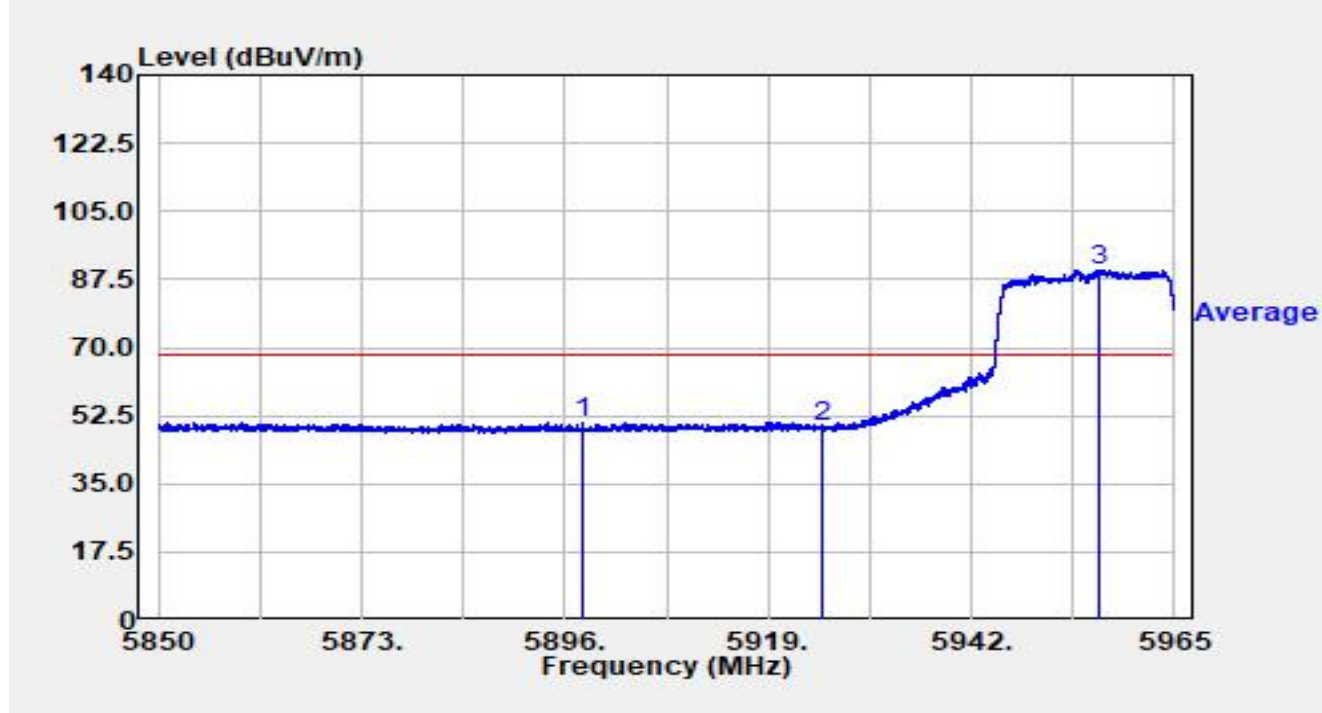


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5898.082	29.47	21.36	50.83	-17.37	68.20	Average
2		5925.003	28.14	21.55	49.70	-18.50	68.20	Average
3		5956.536	68.52	21.40	89.91	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

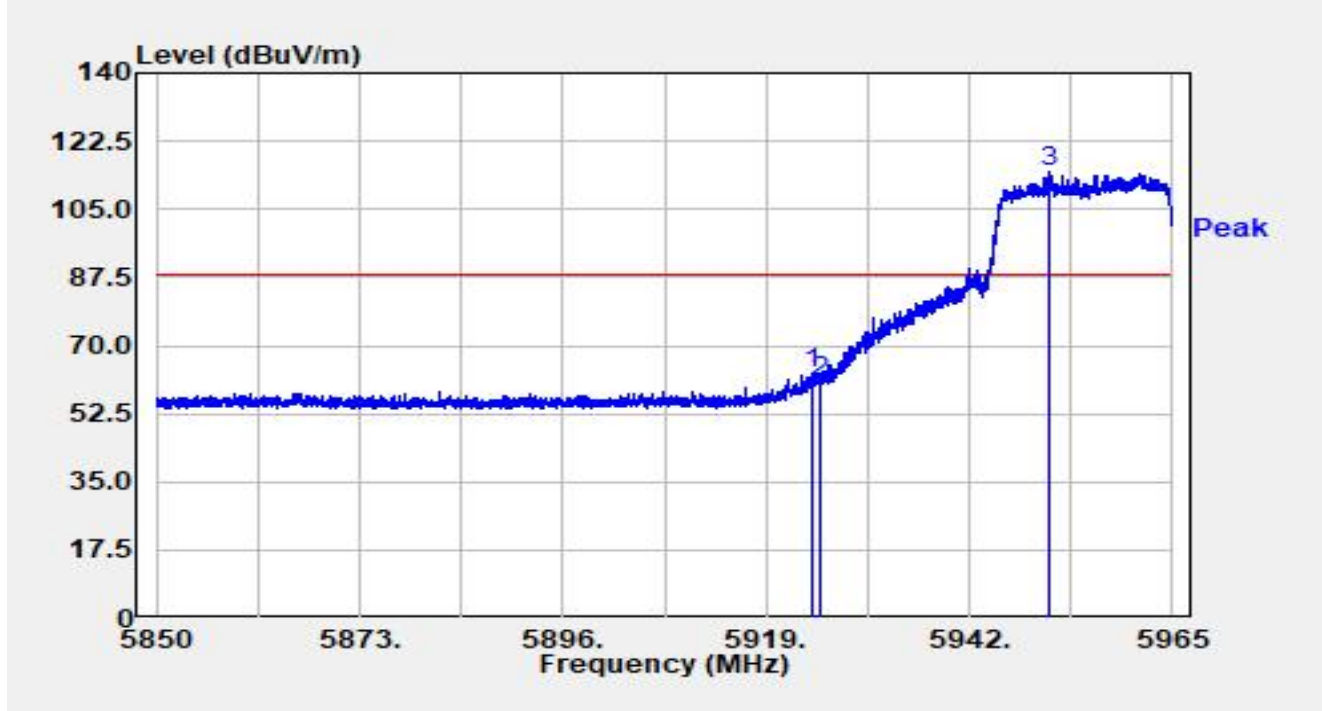


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.359	41.32	21.56	62.88	-25.32	88.20	Peak
2		5925.003	39.17	21.55	60.73	-27.47	88.20	Peak
3		5950.993	92.98	21.45	114.43	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

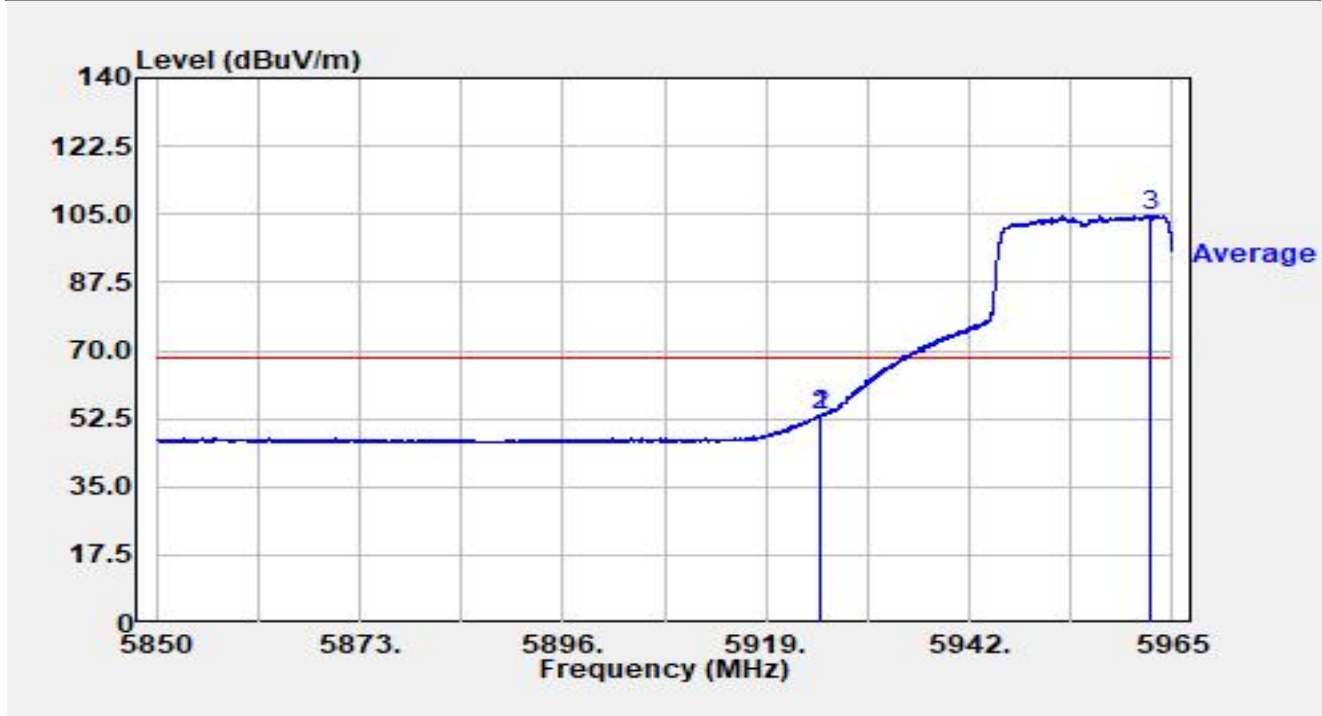


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.992	31.86	21.55	53.41	-14.79	68.20	Average
2		5925.003	31.71	21.55	53.26	-14.94	68.20	Average
3		5962.493	83.30	21.33	104.63	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

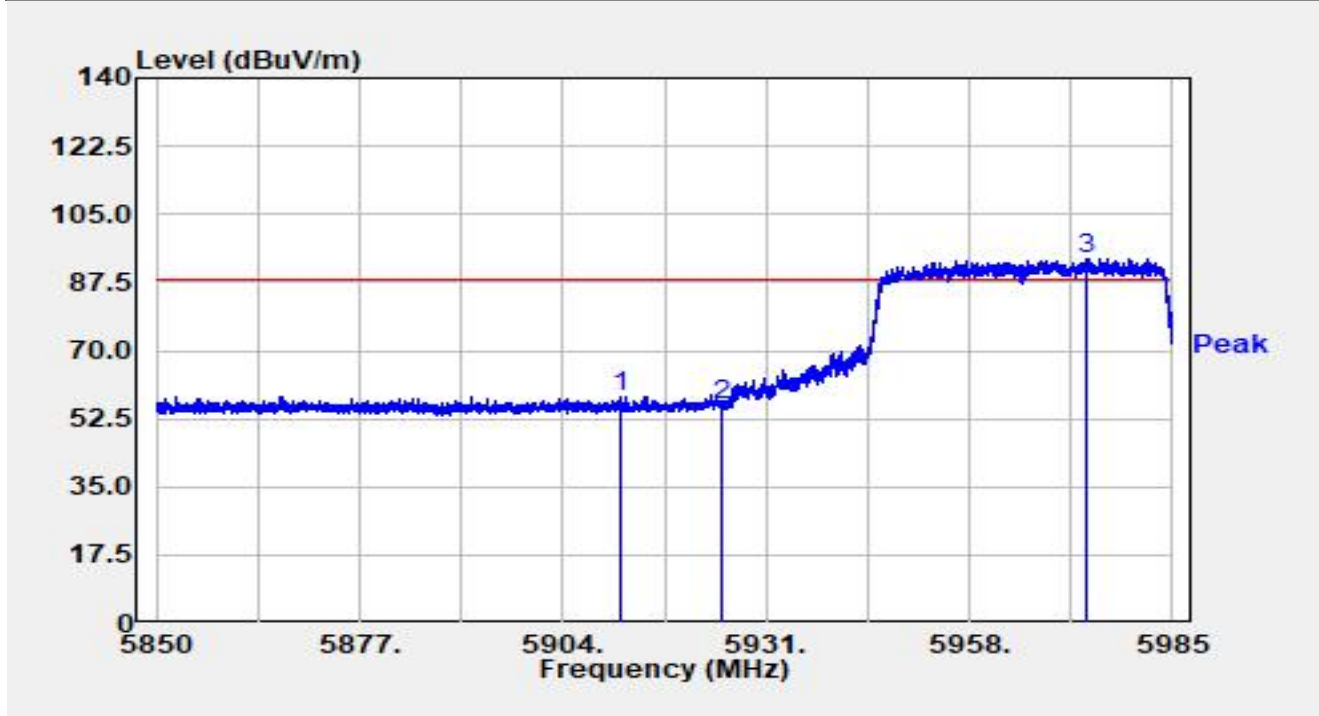


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5911.654	36.49	21.50	57.99	-30.21	88.20	Peak
2		5925.006	34.38	21.55	55.94	-32.26	88.20	Peak
3	*	5973.565	72.31	21.34	93.65	5.45	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

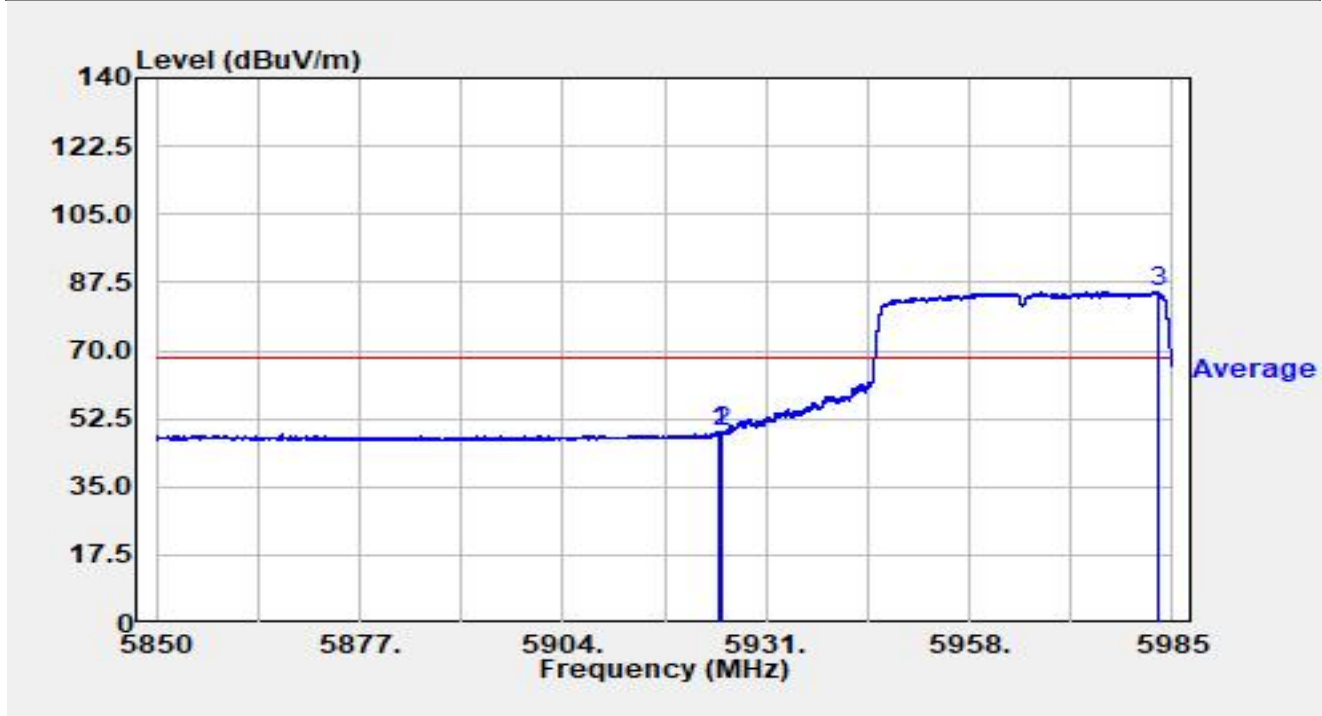


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.750	27.74	21.55	49.29	-18.91	68.20	Average
2		5925.006	27.66	21.55	49.22	-18.98	68.20	Average
3		5983.191	63.90	21.35	85.25	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

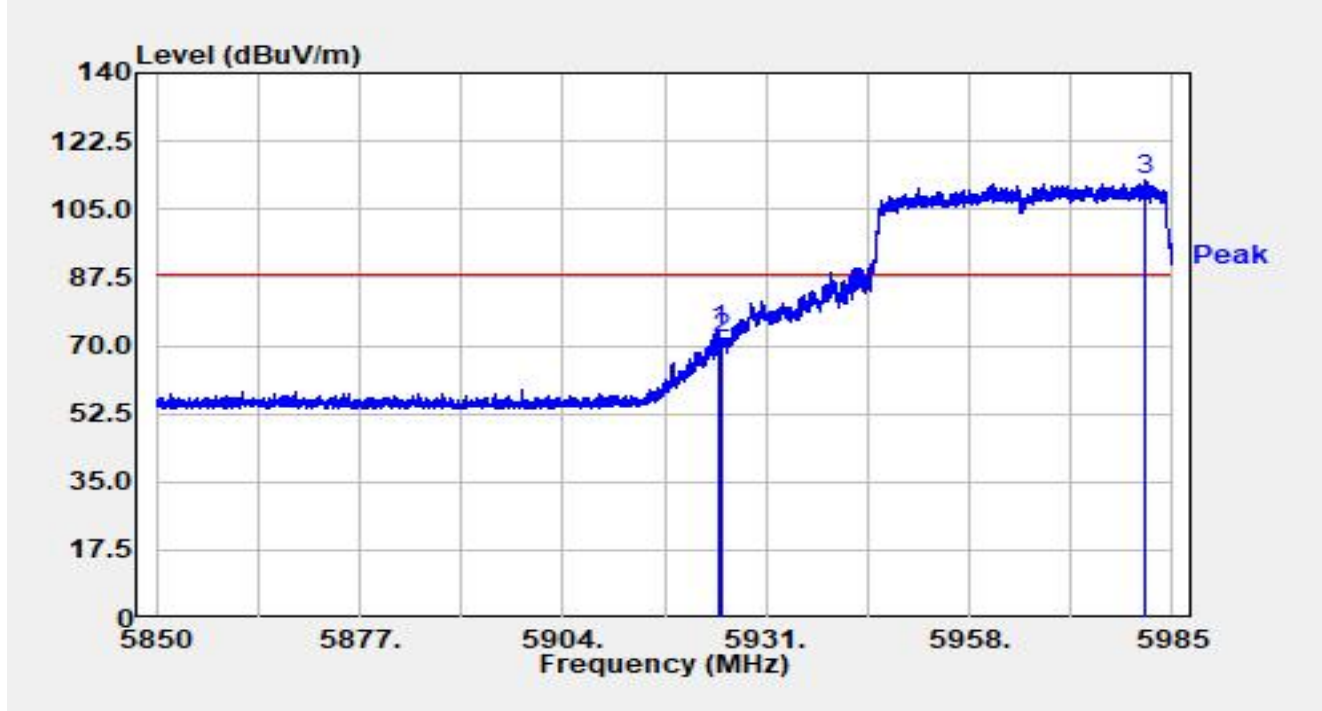


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.642	52.64	21.55	74.19	-14.01	88.20	Peak
2		5925.006	50.36	21.55	71.92	-16.28	88.20	Peak
3		5981.477	91.19	21.33	112.52	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

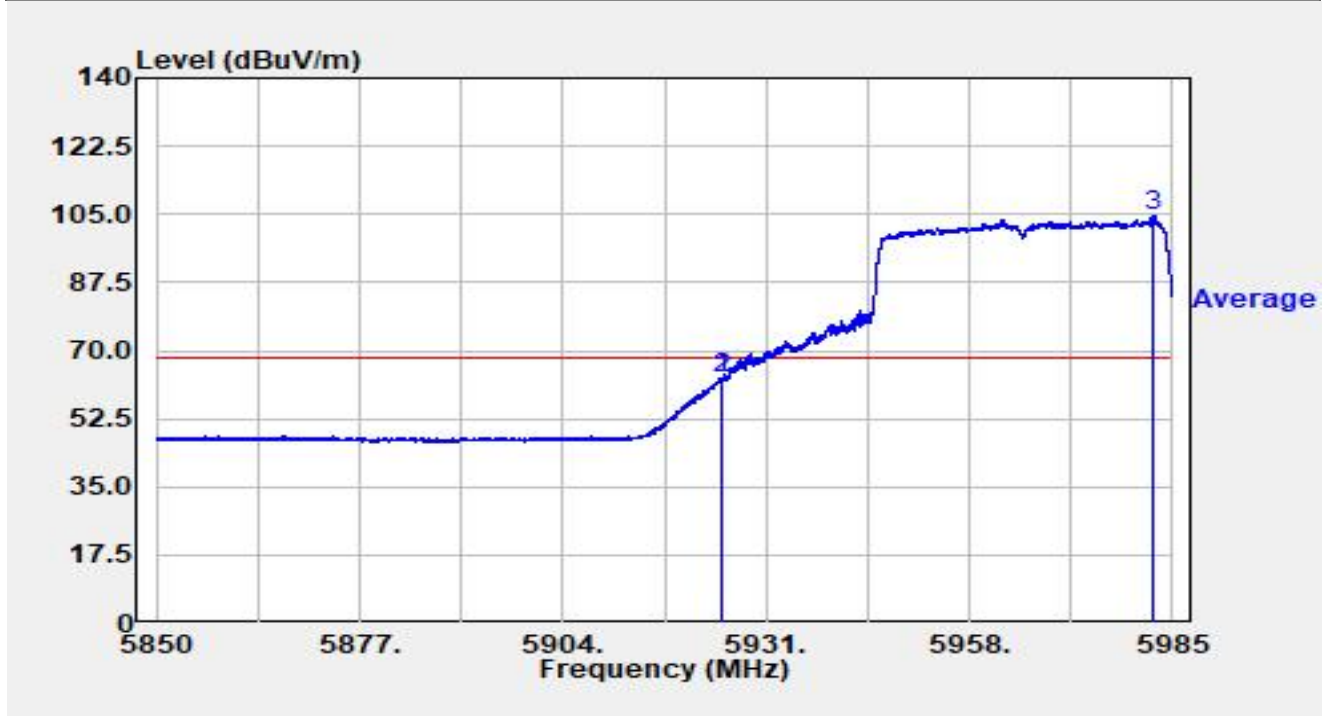


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.952	41.49	21.55	63.04	-5.16	68.20	Average
2		5925.006	41.30	21.55	62.86	-5.34	68.20	Average
3		5982.489	83.28	21.34	104.62	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

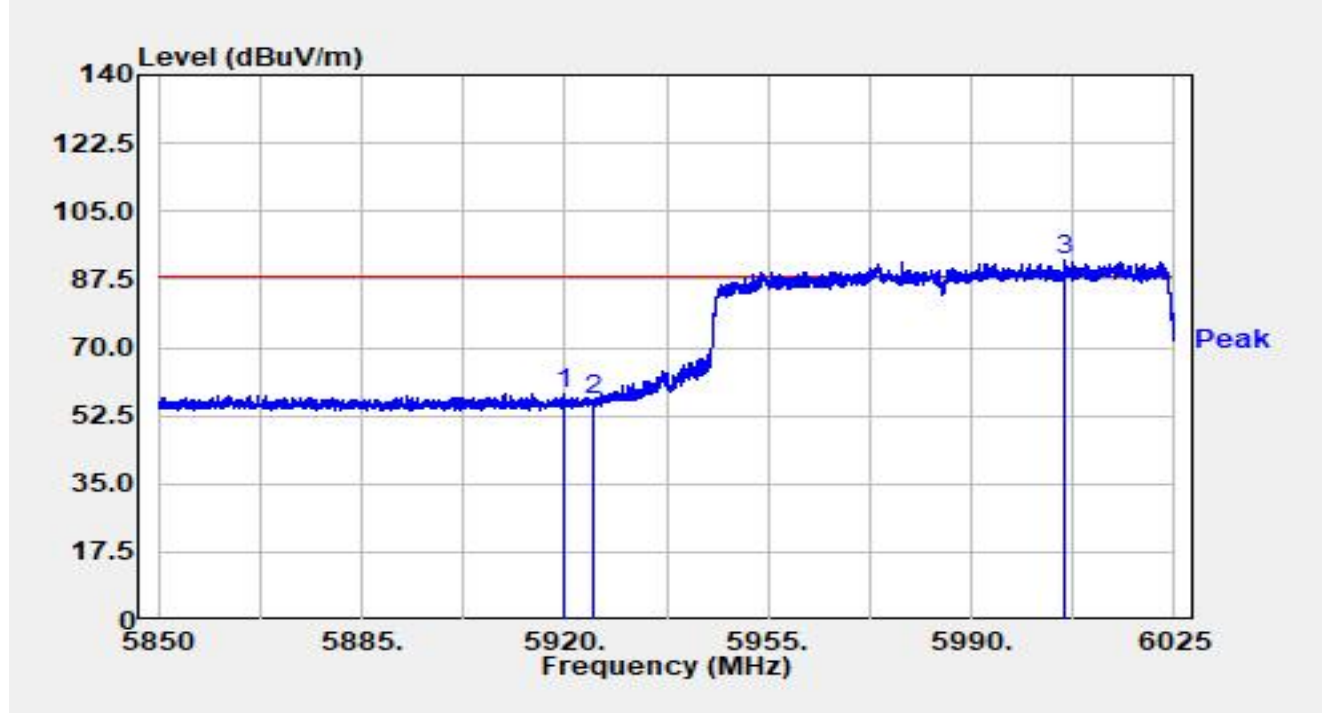


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5919.667	36.55	21.54	58.09	-30.11	88.20	Peak
2		5925.005	35.00	21.55	56.55	-31.65	88.20	Peak
3		6006.223	70.99	21.58	92.57	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

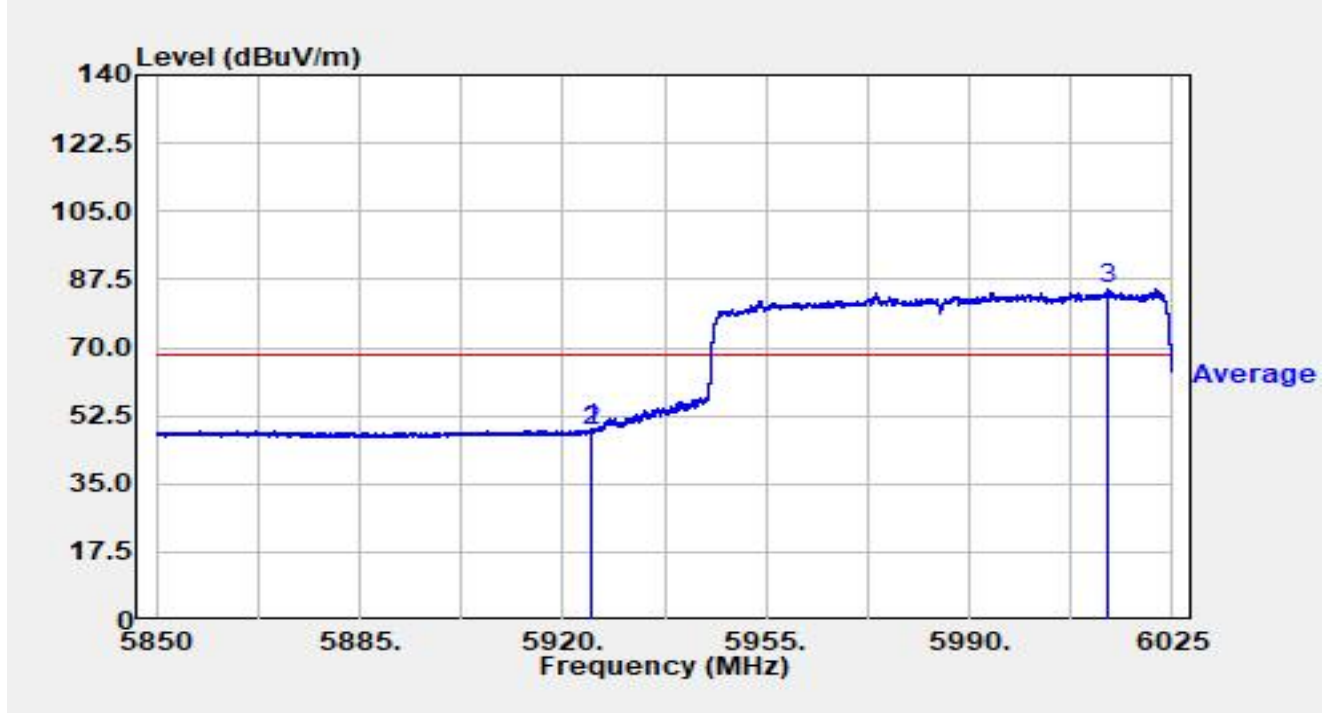


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.953	27.37	21.55	48.92	-19.28	68.20	Average
2		5925.005	27.04	21.55	48.60	-19.60	68.20	Average
3		6013.958	63.27	21.63	84.90	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

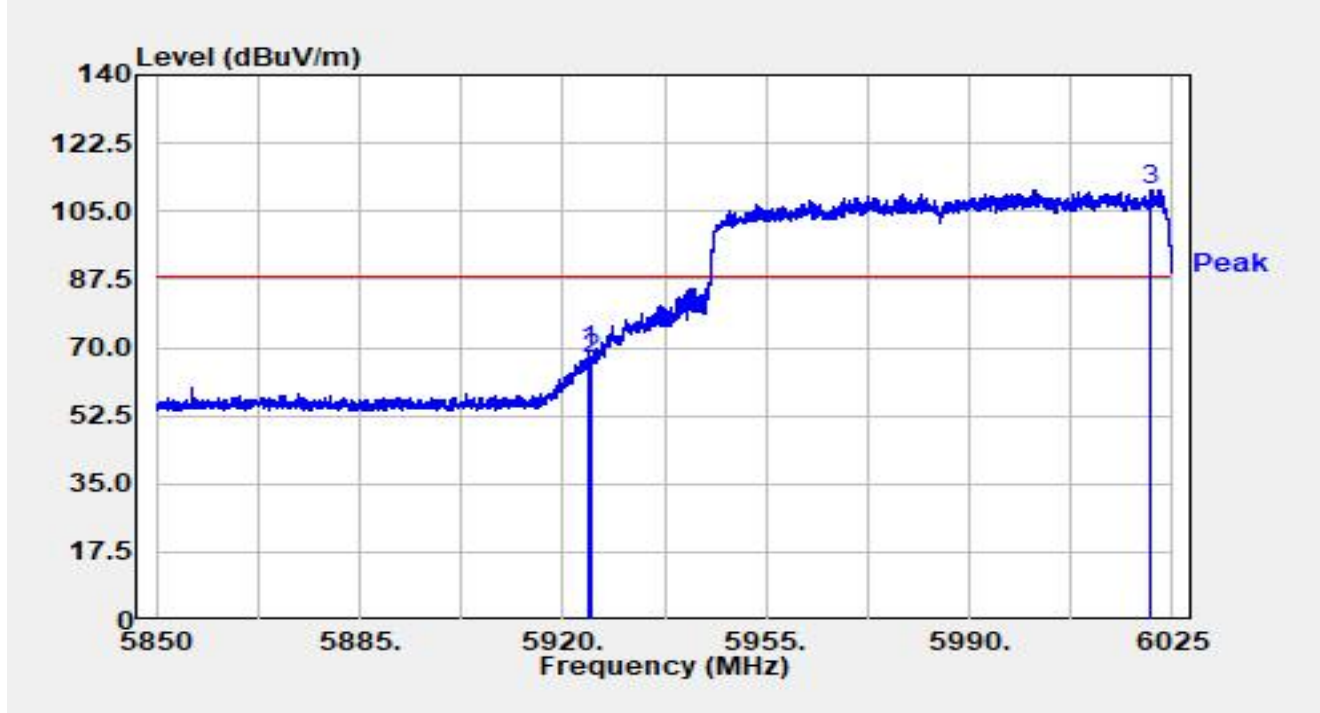


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.305	47.87	21.56	69.43	-18.77	88.20	Peak
2		5925.005	45.50	21.55	67.05	-21.15	88.20	Peak
3		6021.255	89.07	21.58	110.64	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

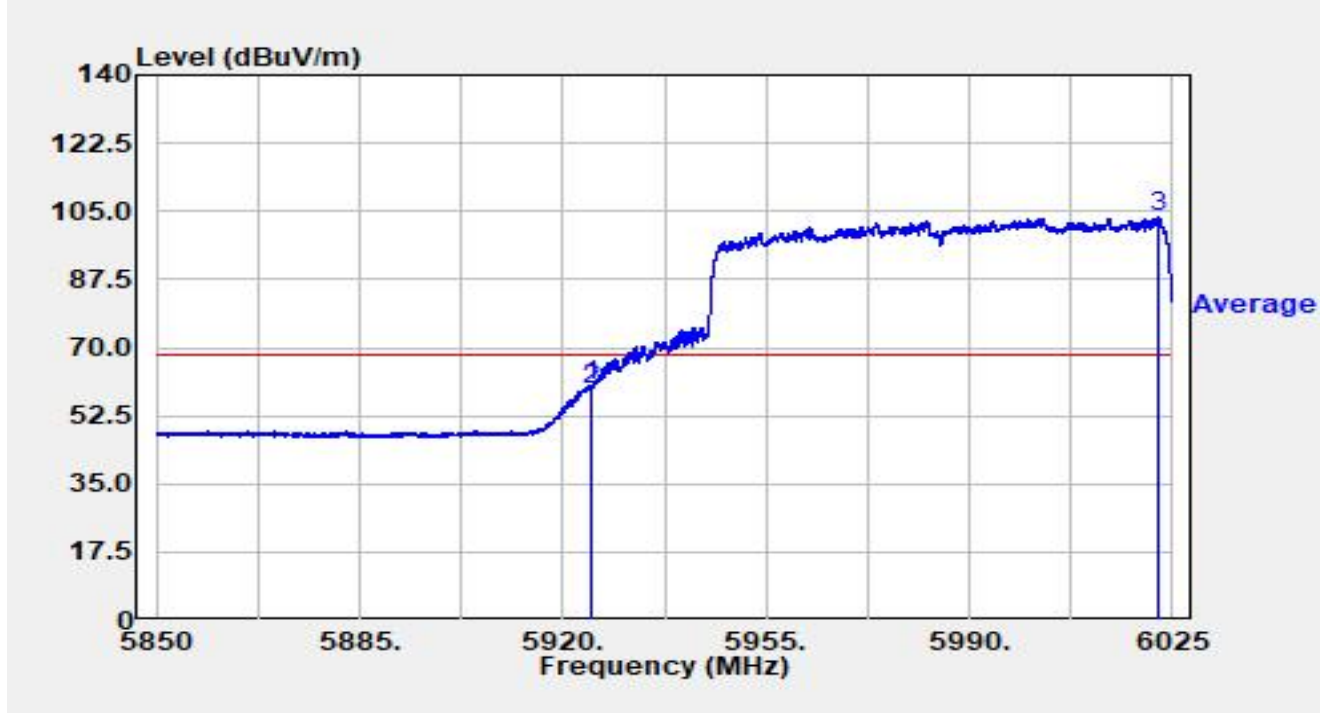


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.848	38.71	21.55	60.27	-7.93	68.20	Average
2		5925.005	37.78	21.55	59.34	-8.86	68.20	Average
3		6022.655	81.86	21.56	103.43	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

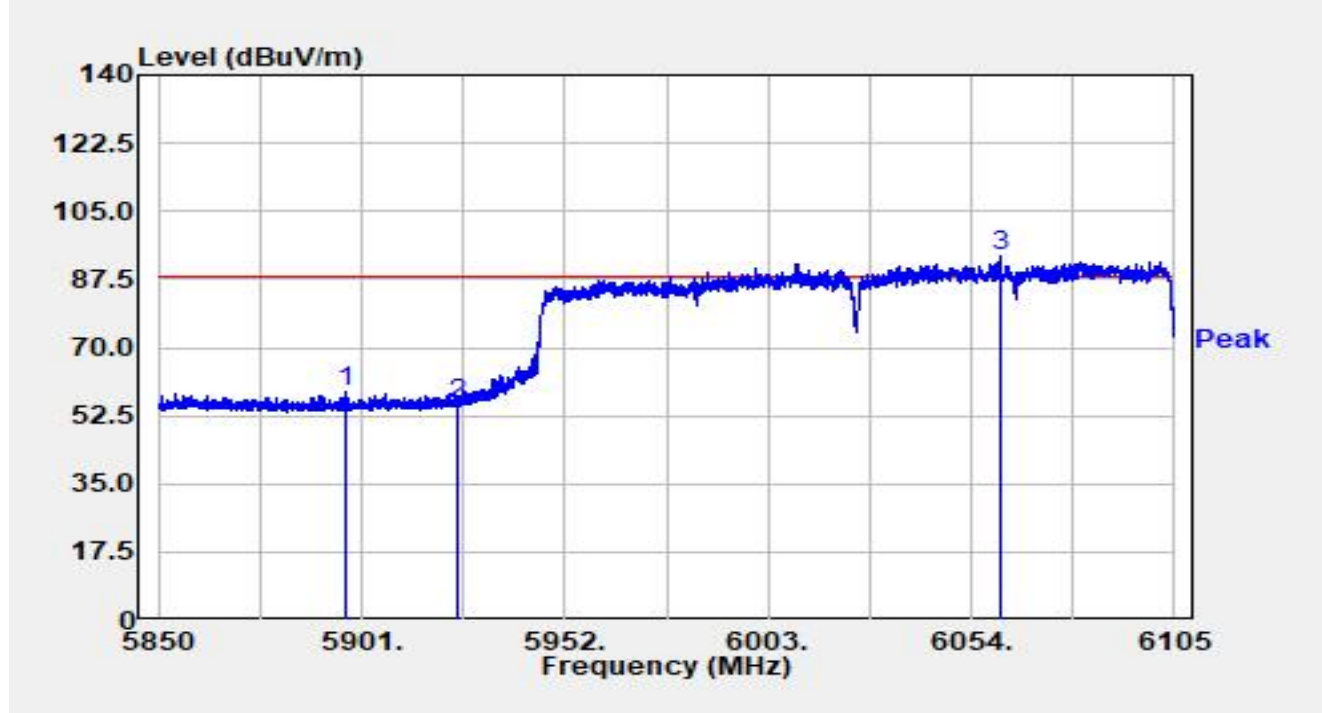


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5896.792	37.13	21.35	58.47	-29.73	88.20	Peak
2		5924.996	34.01	21.55	55.56	-32.64	88.20	Peak
3		6061.063	72.14	21.46	93.60	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

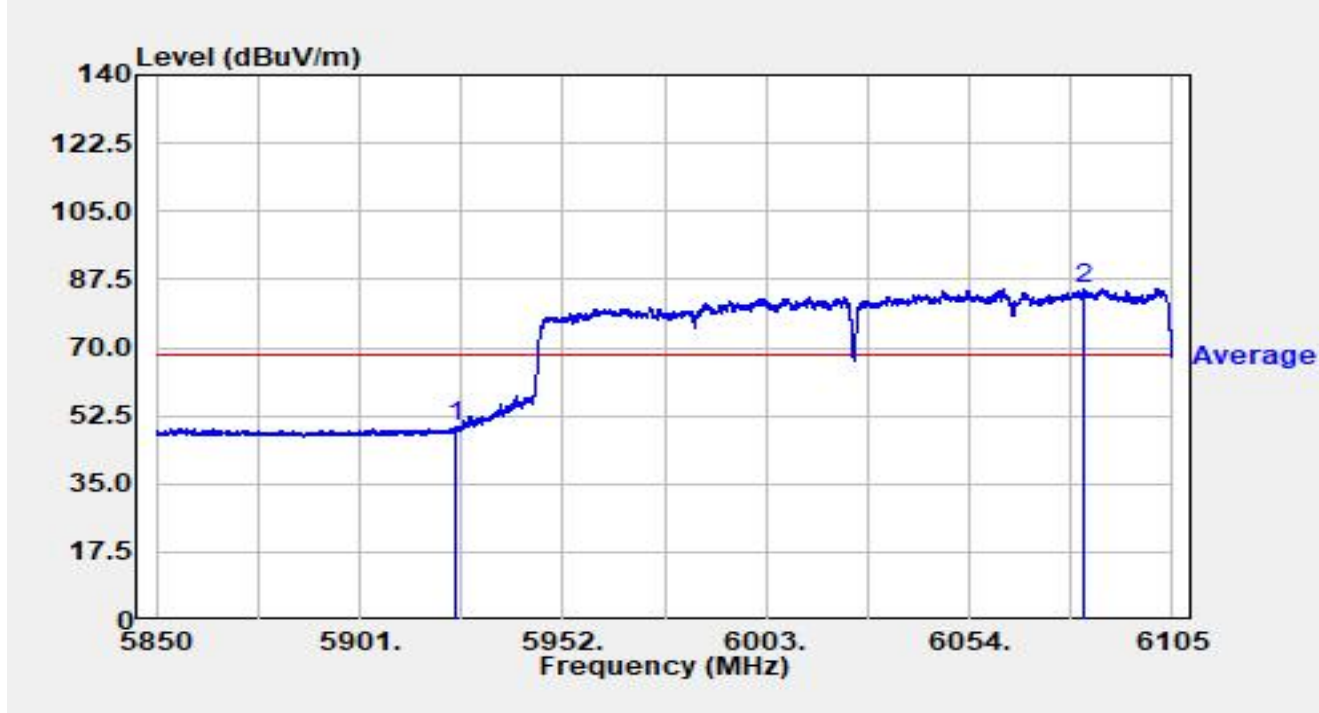


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.996	27.88	21.55	49.43	-18.77	68.20	Average
2		6082.840	63.46	21.63	85.09	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

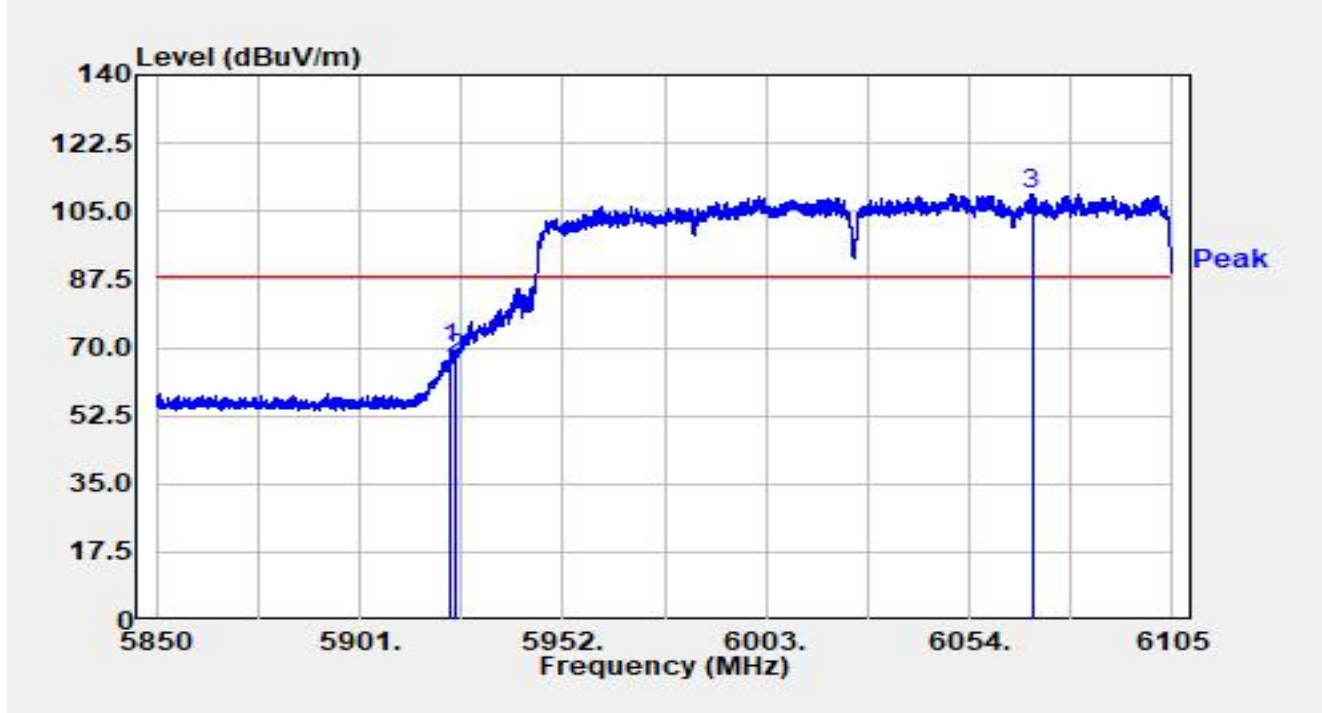


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.669	48.26	21.55	69.82	-18.38	88.20	Peak
2		5924.996	45.48	21.55	67.03	-21.17	88.20	Peak
3		6069.708	88.09	21.50	109.59	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

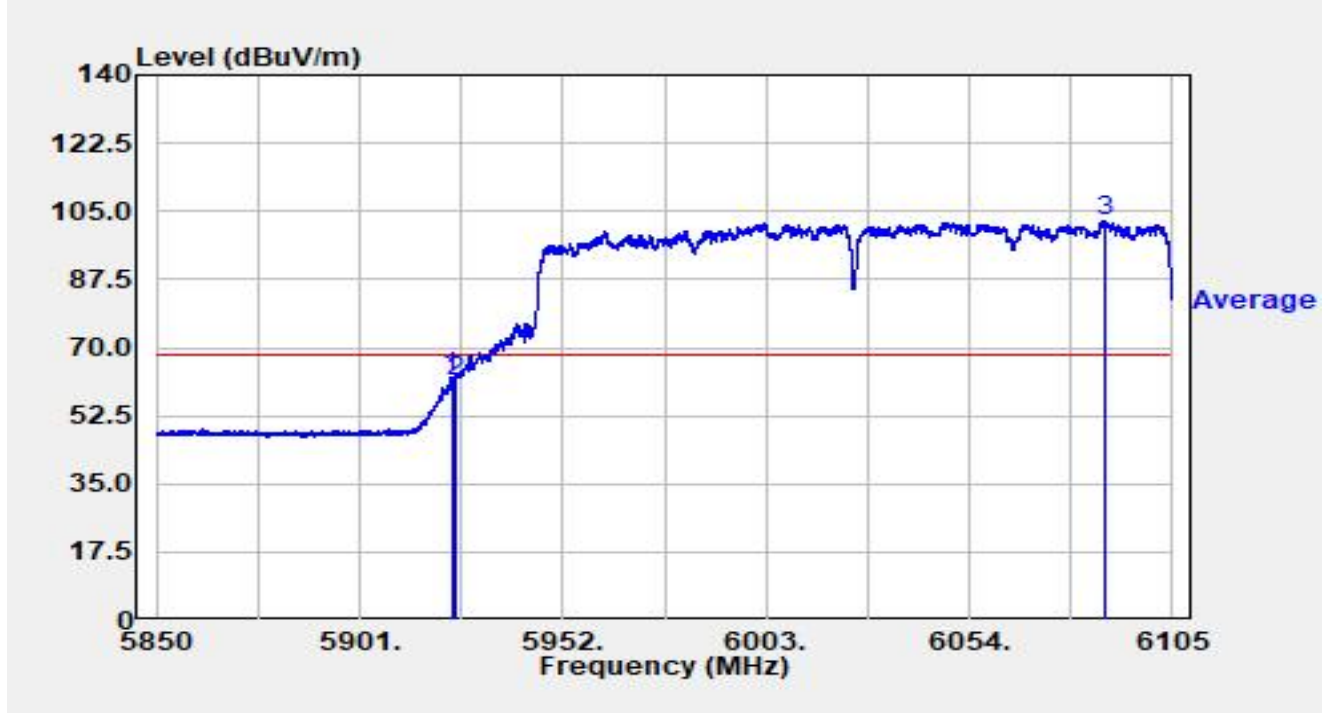


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.078	40.76	21.56	62.32	-5.88	68.20	Average
2		5924.996	39.57	21.55	61.13	-7.07	68.20	Average
3		6087.788	80.99	21.64	102.63	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

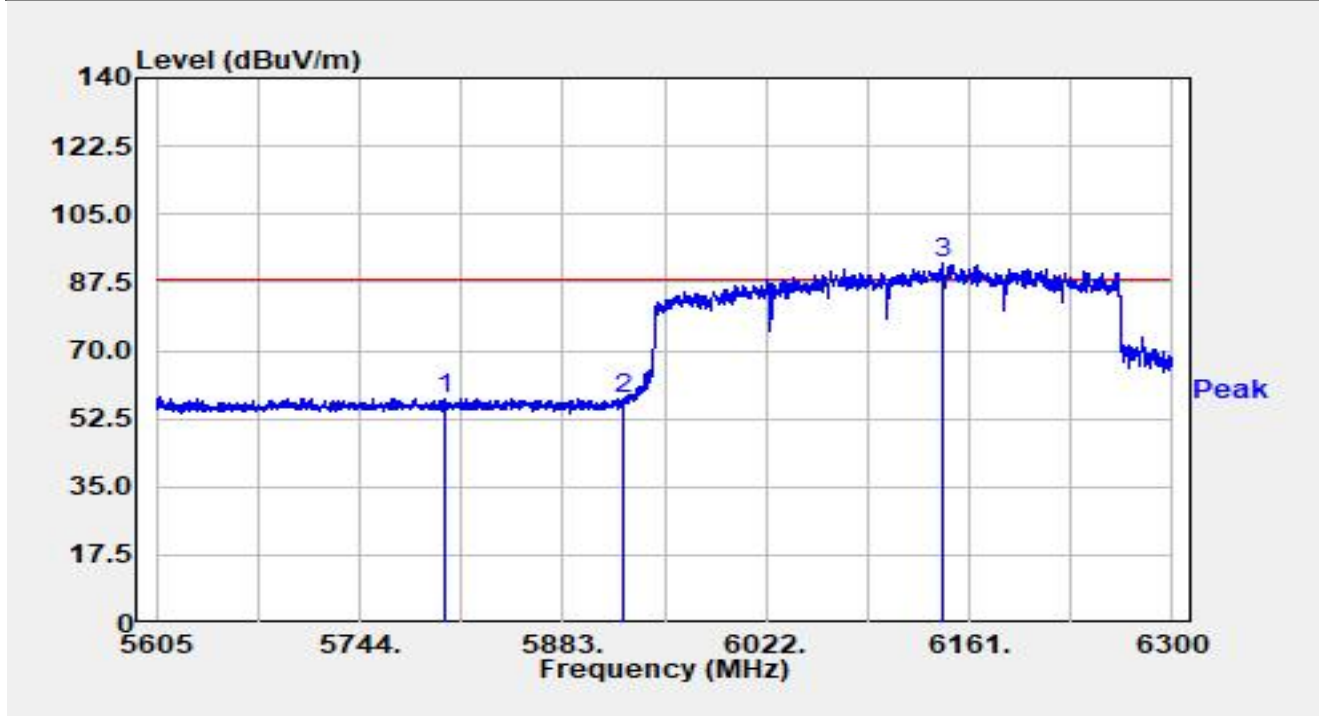


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5801.980	36.46	21.37	57.83	-30.37	88.20	Peak
2		5925.000	35.87	21.55	57.42	-30.78	88.20	Peak
3		6142.810	70.74	21.60	92.34	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

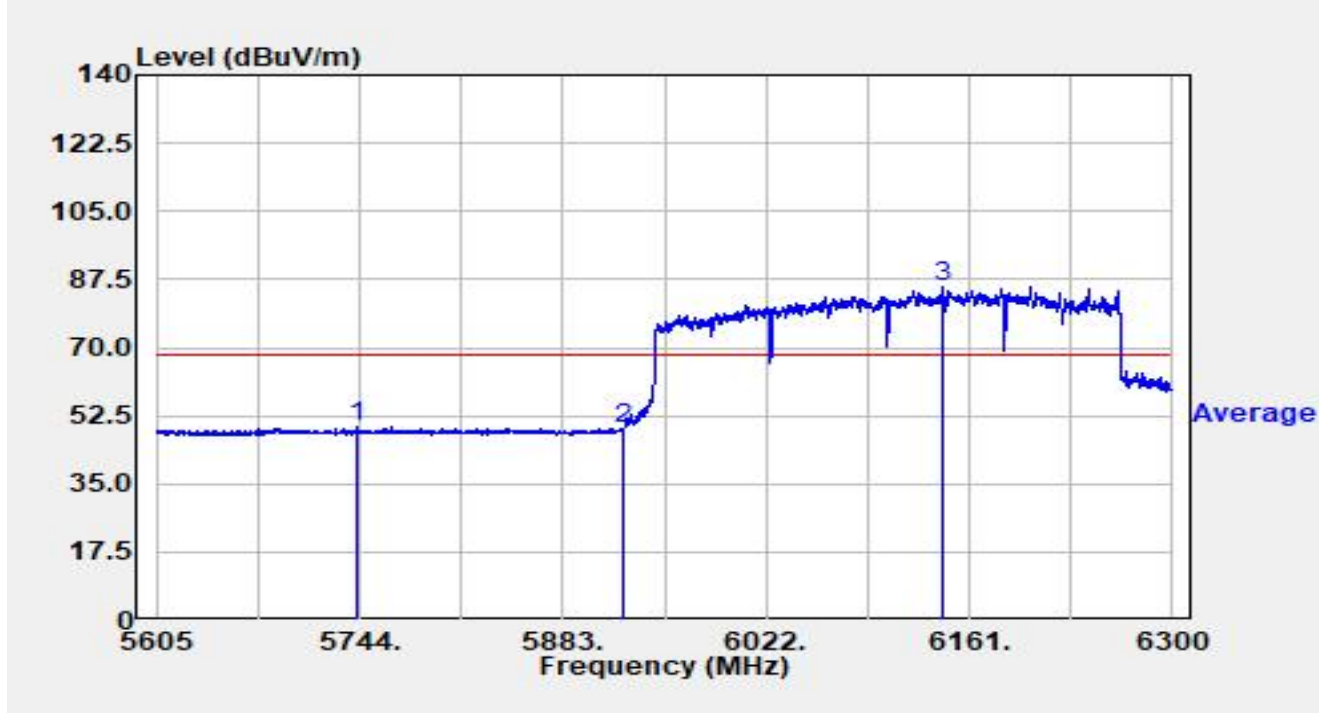


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5742.550	28.29	21.21	49.50	-18.70	68.20	Average
2		5925.040	27.52	21.55	49.07	-19.13	68.20	Average
3		6143.230	64.04	21.59	85.63	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

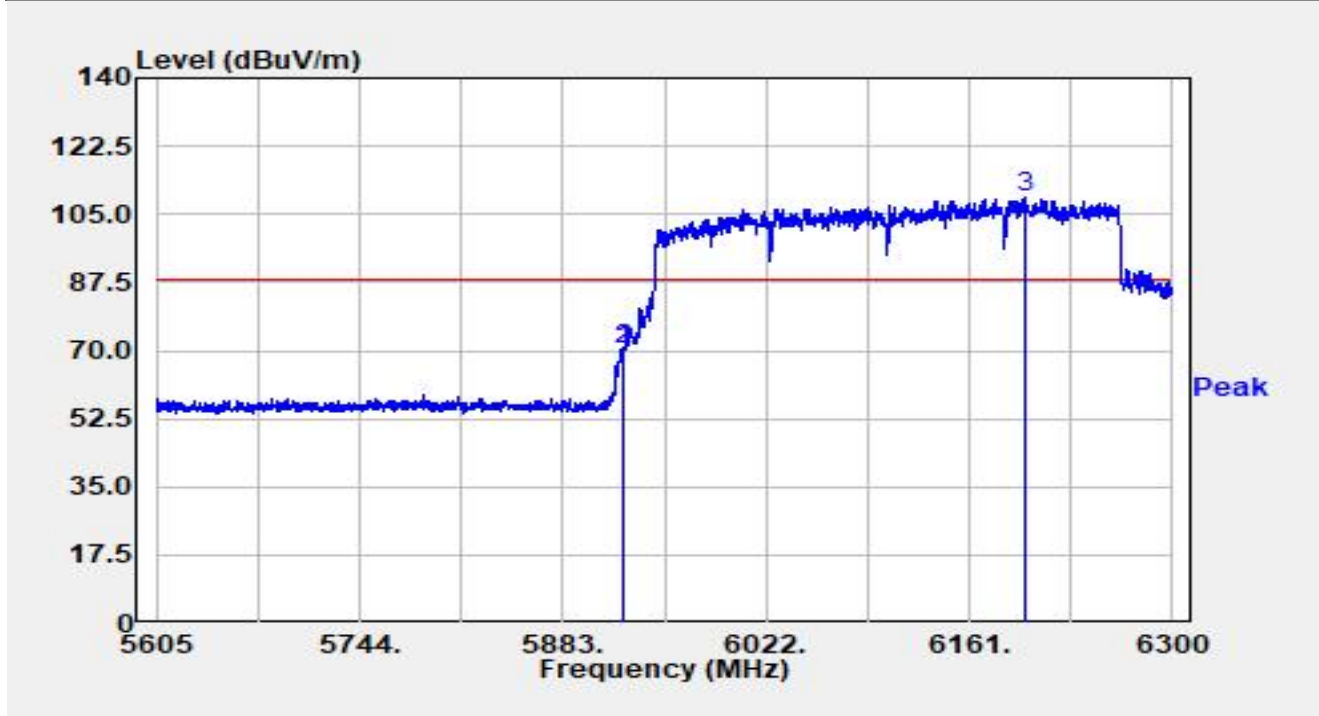


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.830	48.76	21.55	70.31	-17.89	88.20	Peak
2		5925.040	48.74	21.55	70.29	-17.91	88.20	Peak
3		6198.670	87.09	22.16	109.25	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-08-03
Test Engineer	Charles Zhang	Temp./Humidity	25.3°C /53.1%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

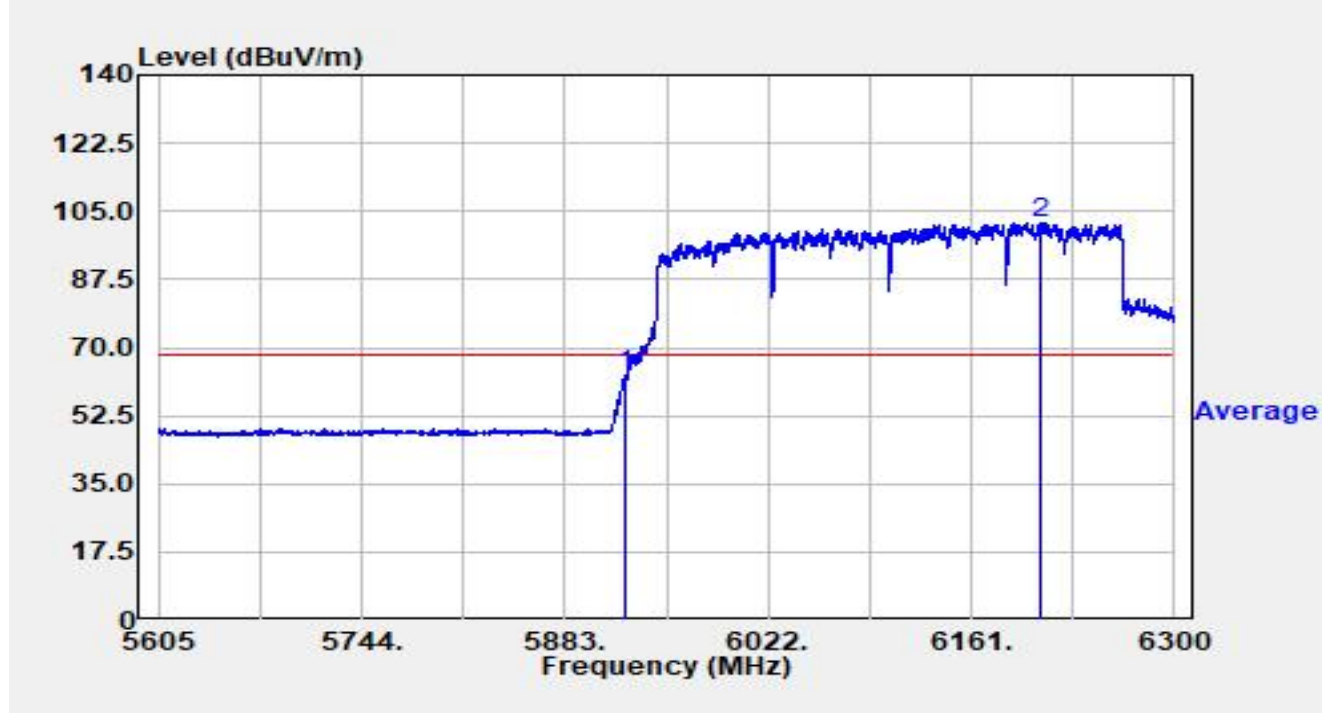


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.040	41.25	21.55	62.80	-5.40	68.20	Average
2		6207.910	79.84	22.17	102.01	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Antenna_312:

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

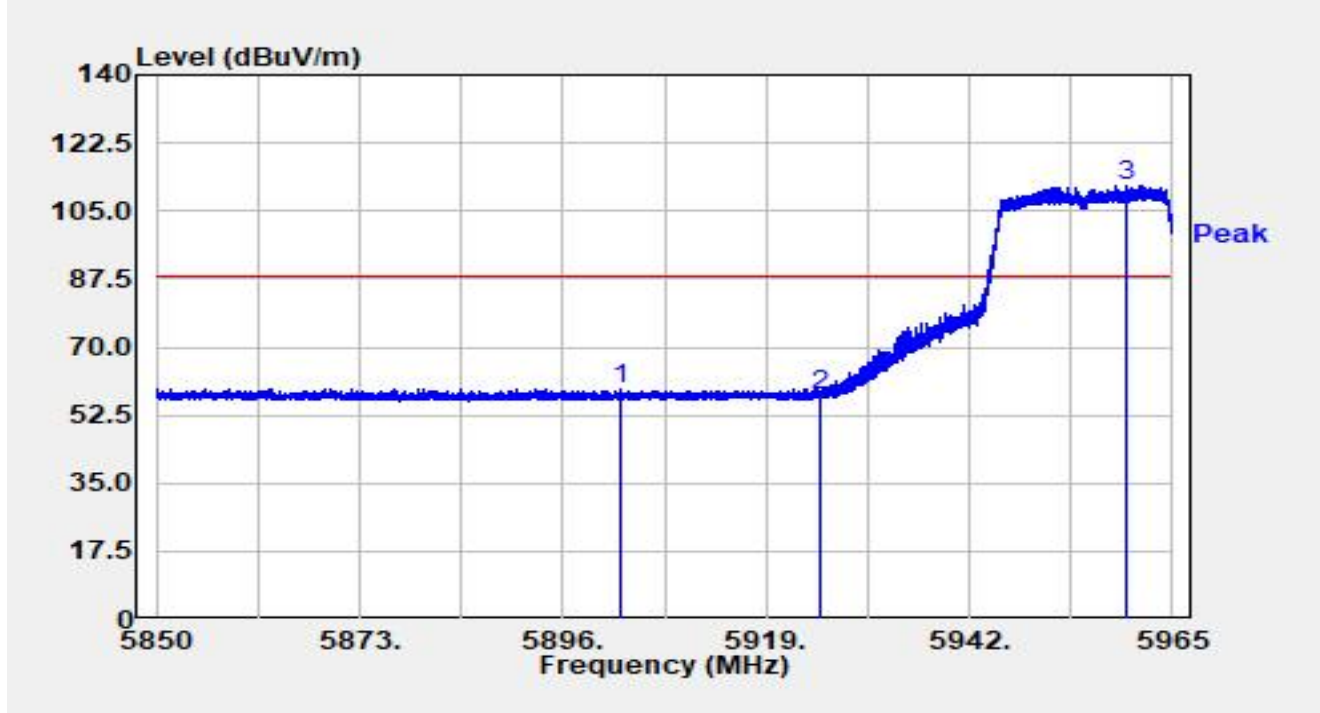


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5902.612	37.52	21.40	58.92	-29.28	88.20	Peak
2		5925.000	36.25	21.55	57.80	-30.40	88.20	Peak
3		5959.687	90.08	21.37	111.45	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

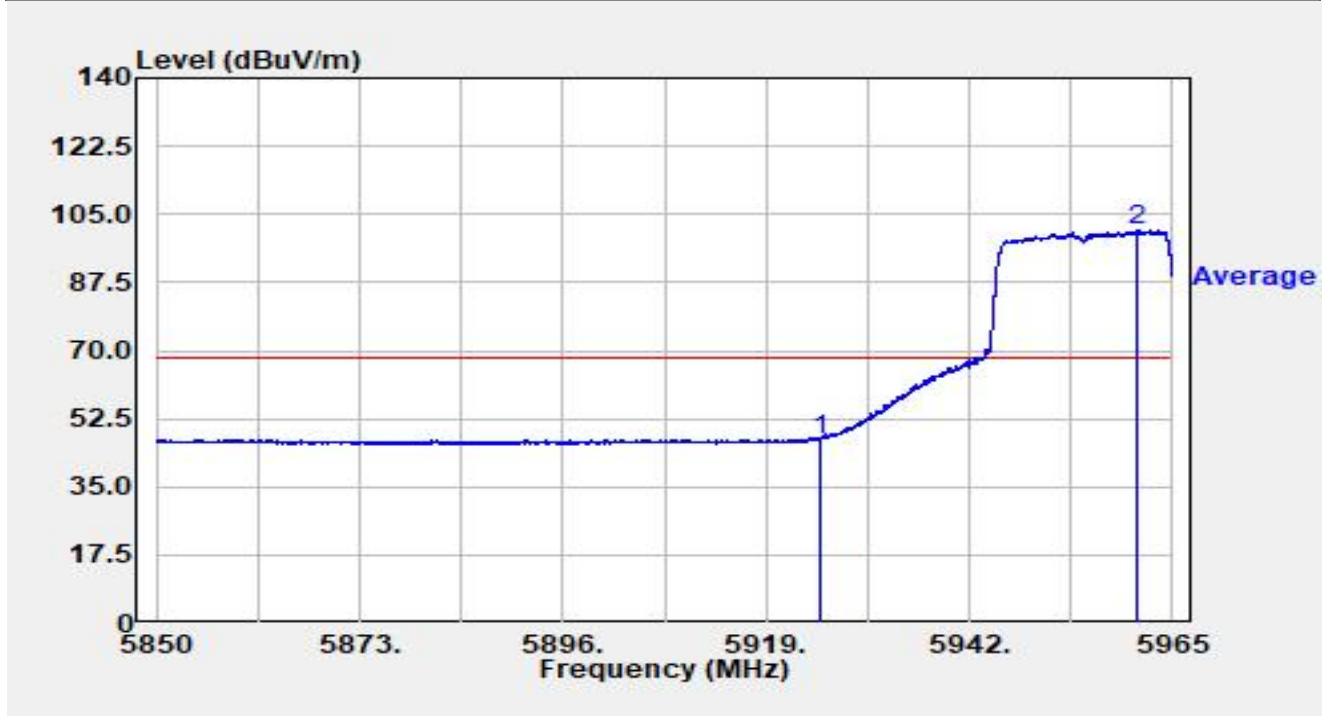


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	25.69	21.55	47.24	-20.96	68.20	Average
2		5960.986	79.37	21.35	100.72	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

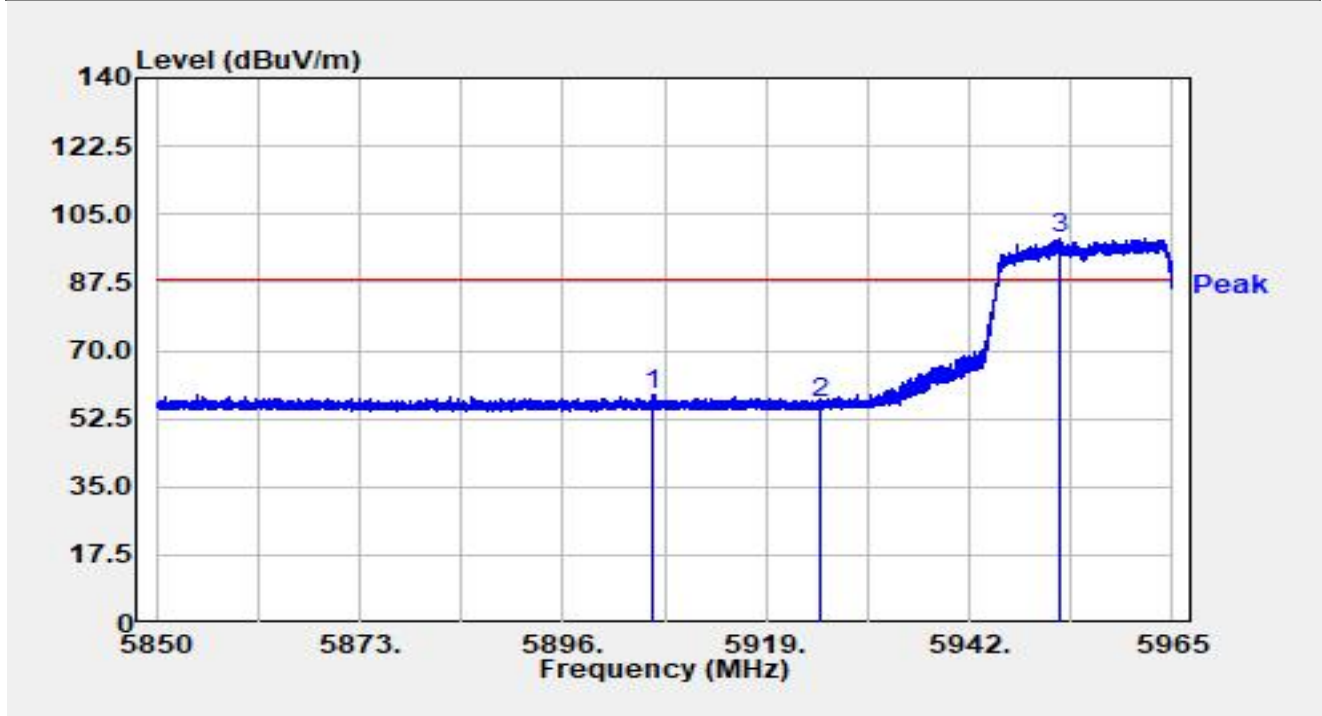


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5906.292	37.40	21.44	58.84	-29.36	88.20	Peak
2		5925.000	35.20	21.55	56.75	-31.45	88.20	Peak
3		5952.212	77.23	21.44	98.67	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

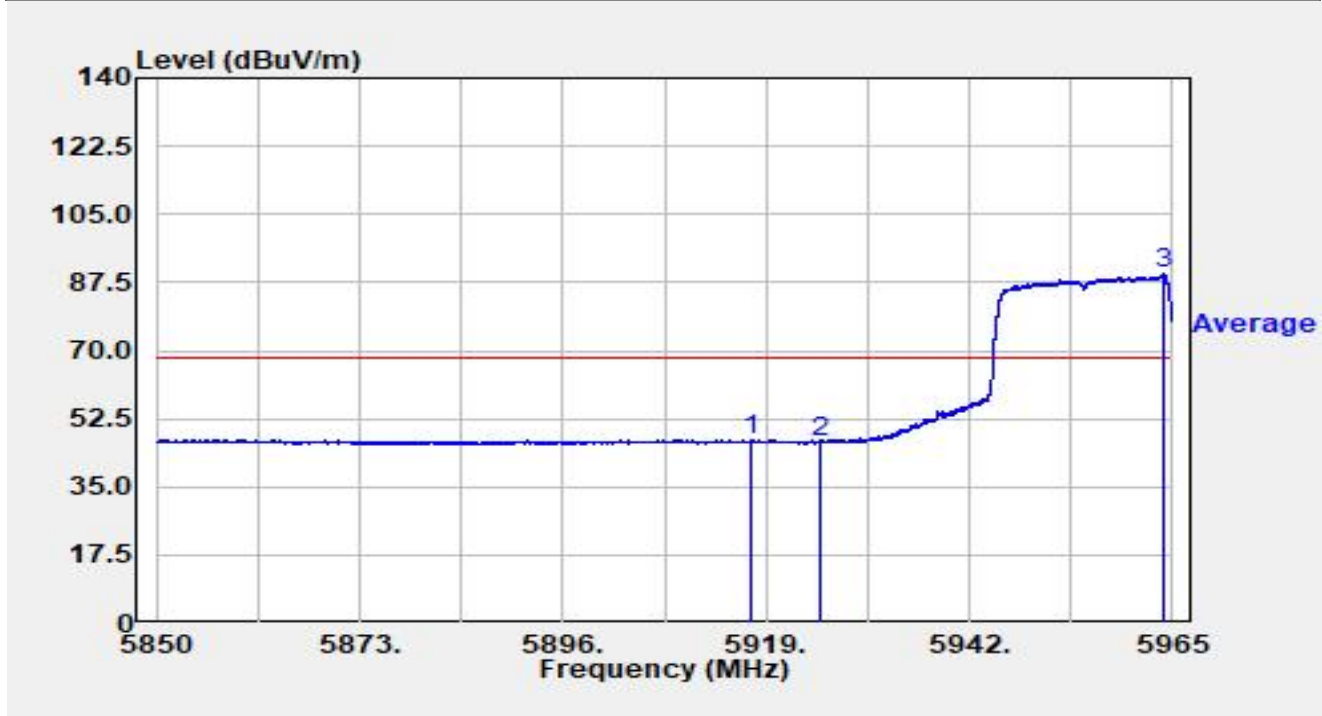


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.413	25.61	21.53	47.14	-21.06	68.20	Average
2		5925.000	25.02	21.55	46.58	-21.62	68.20	Average
3		5964.068	68.28	21.32	89.59	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

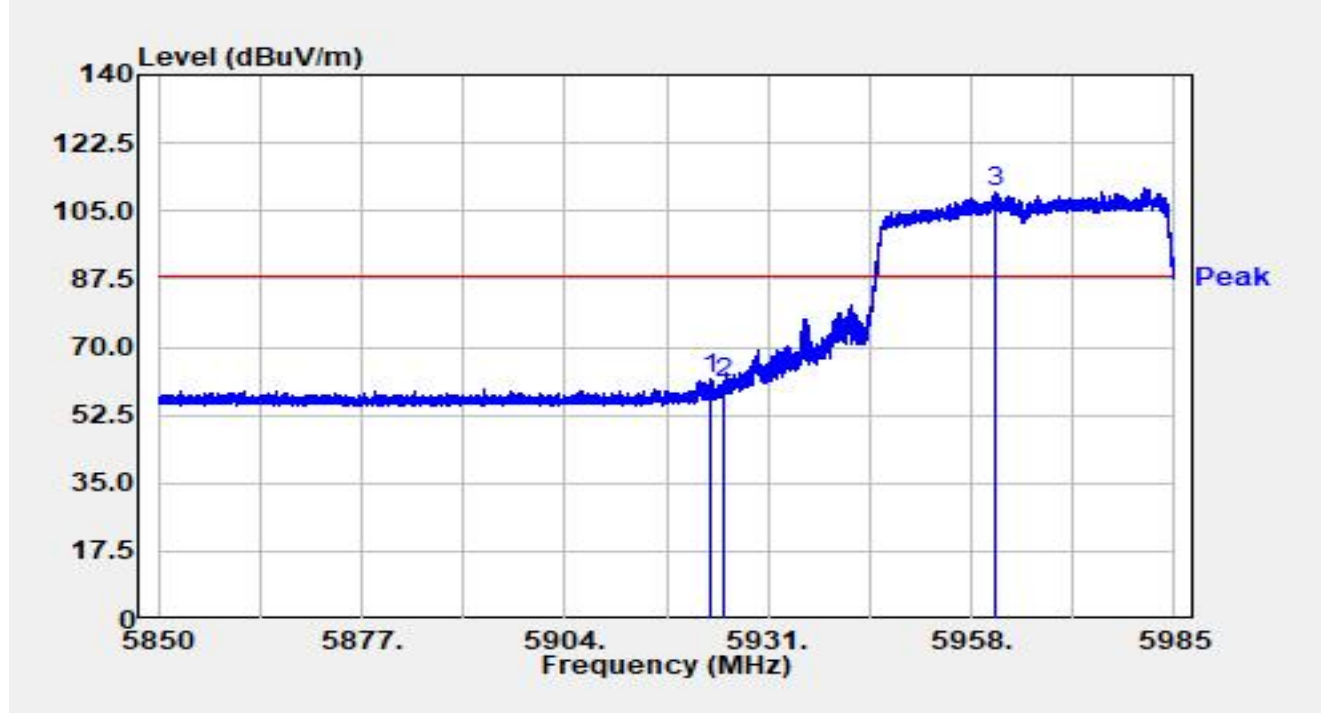


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.413	40.27	21.55	61.82	-26.38	88.20	Peak
2		5925.006	39.00	21.55	60.56	-27.64	88.20	Peak
3		5961.240	88.41	21.35	109.76	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

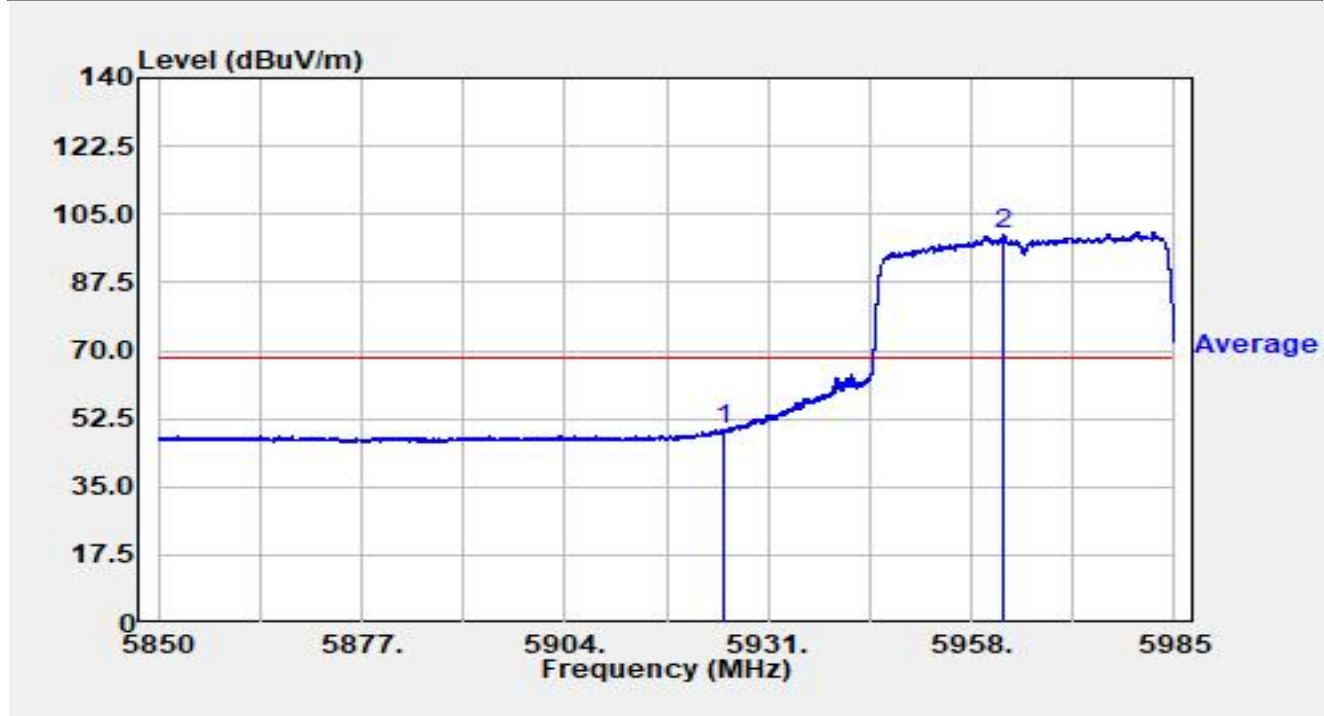


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	28.08	21.55	49.64	-18.56	68.20	Average
2		5962.252	78.53	21.34	99.87	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

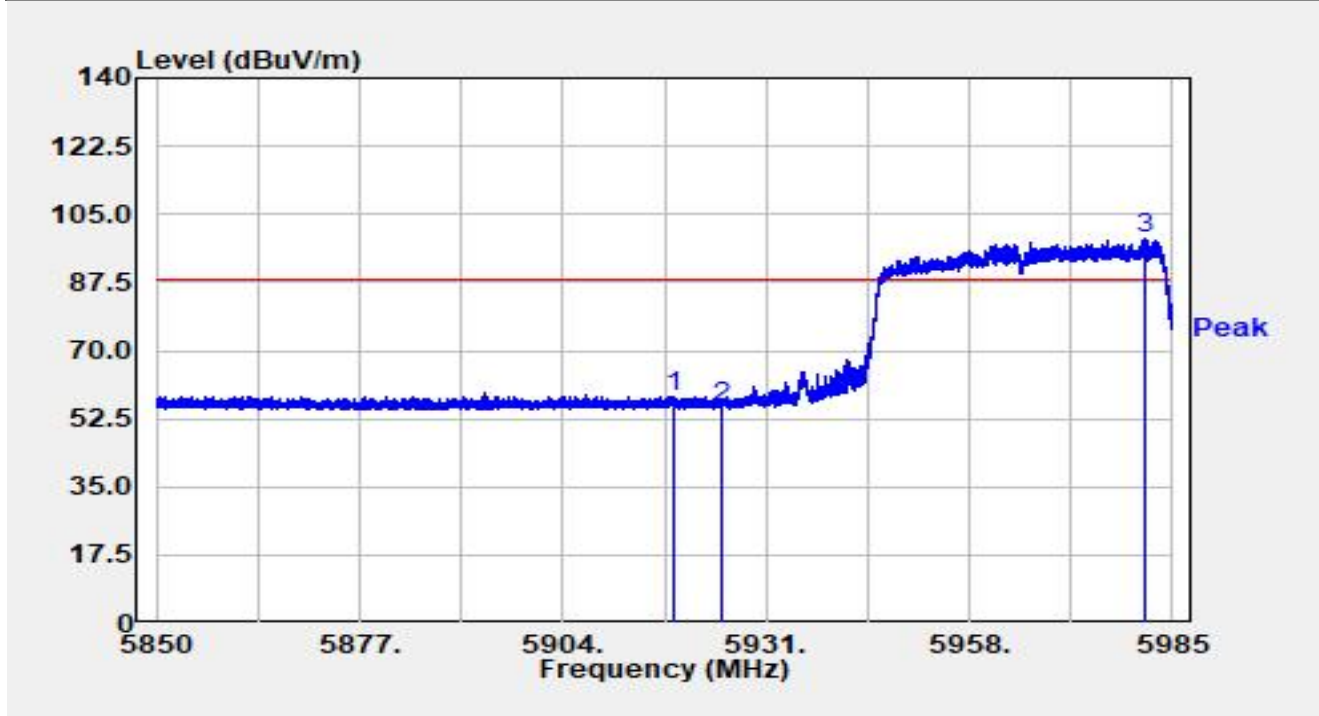


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.904	36.83	21.54	58.36	-29.84	88.20	Peak
2		5925.000	33.78	21.55	55.33	-32.87	88.20	Peak
3		5981.369	77.55	21.33	98.88	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

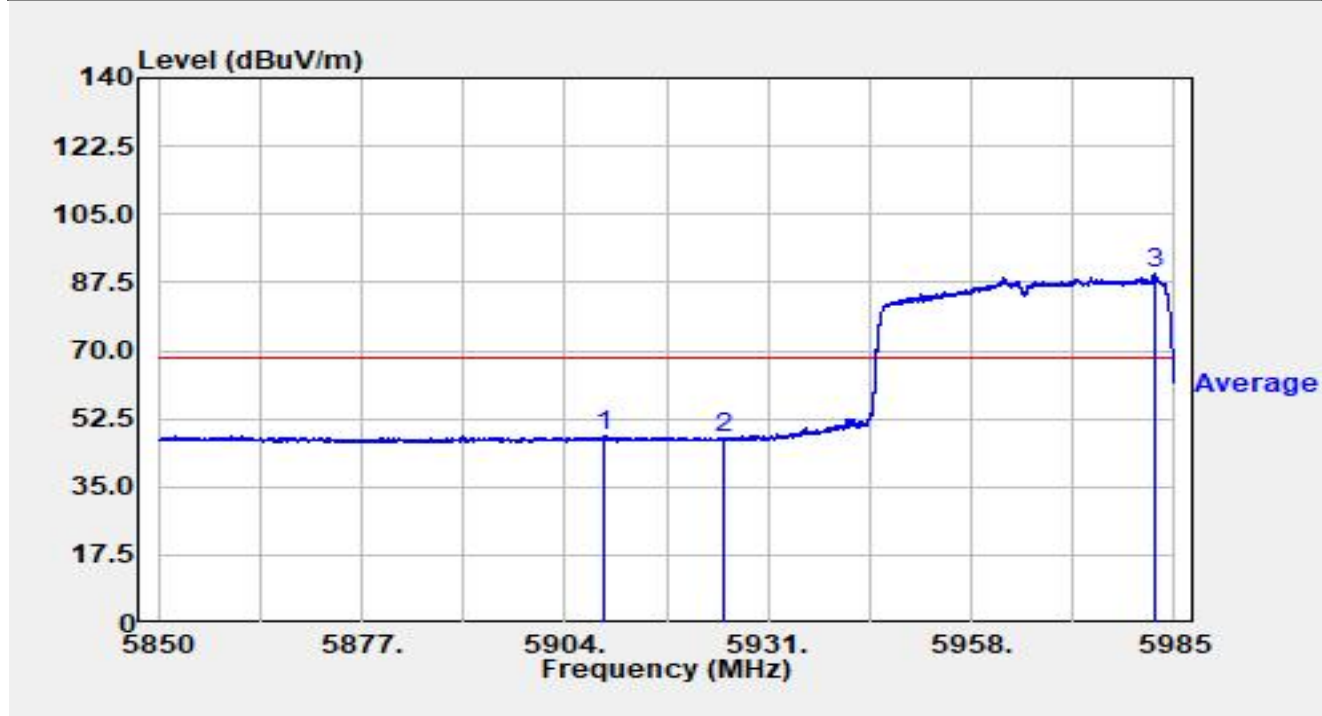


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5909.359	26.42	21.47	47.89	-20.31	68.20	Average
2		5925.000	25.75	21.55	47.30	-20.90	68.20	Average
3		5982.300	68.51	21.34	89.85	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

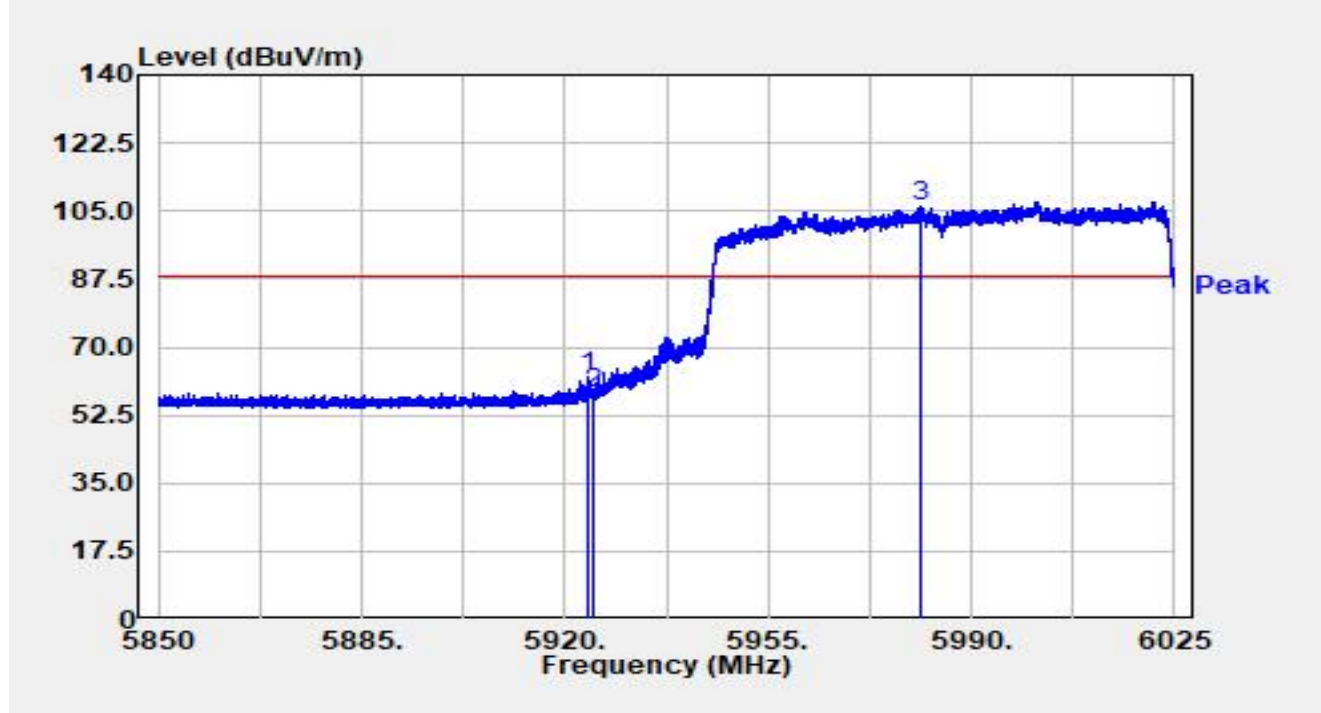


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.130	40.88	21.56	62.43	-25.77	88.20	Peak
2		5925.000	36.49	21.55	58.04	-30.16	88.20	Peak
3		5981.285	85.06	21.33	106.39	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

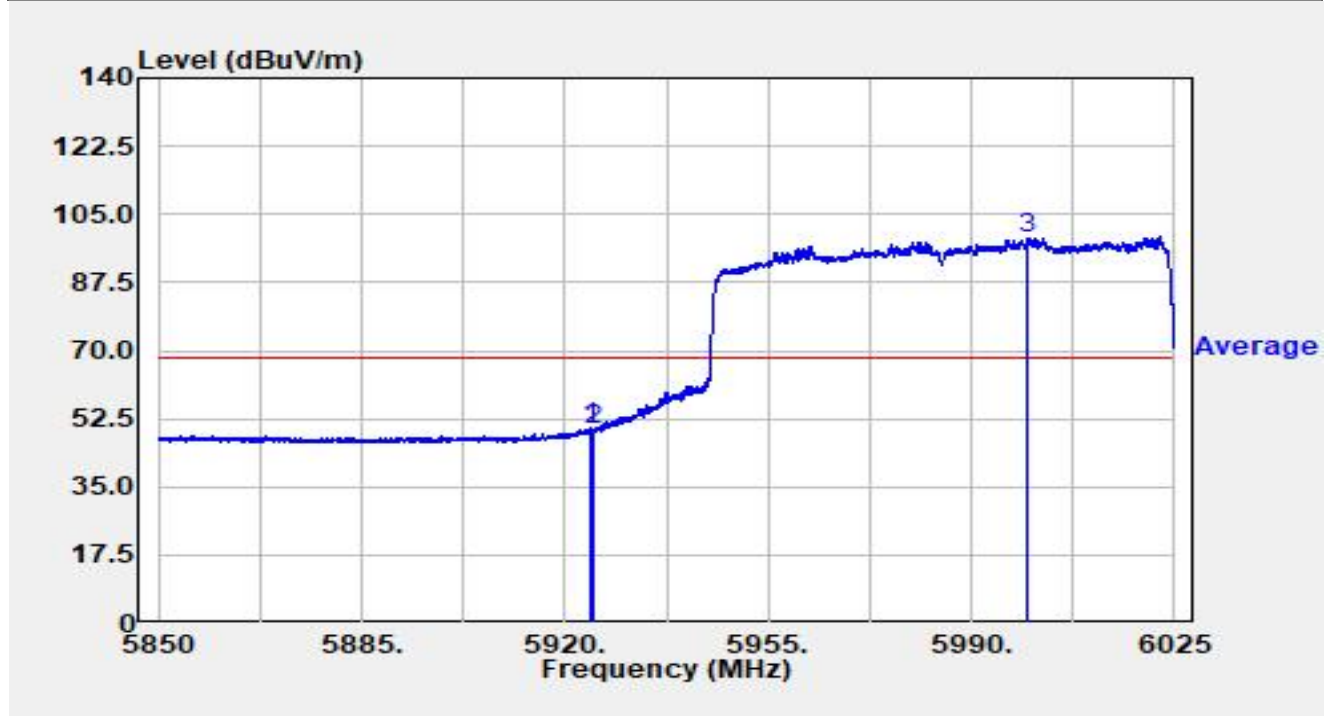


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.480	28.65	21.56	50.21	-17.99	68.20	Average
2		5925.000	27.91	21.55	49.46	-18.74	68.20	Average
3		5999.800	77.44	21.55	98.98	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

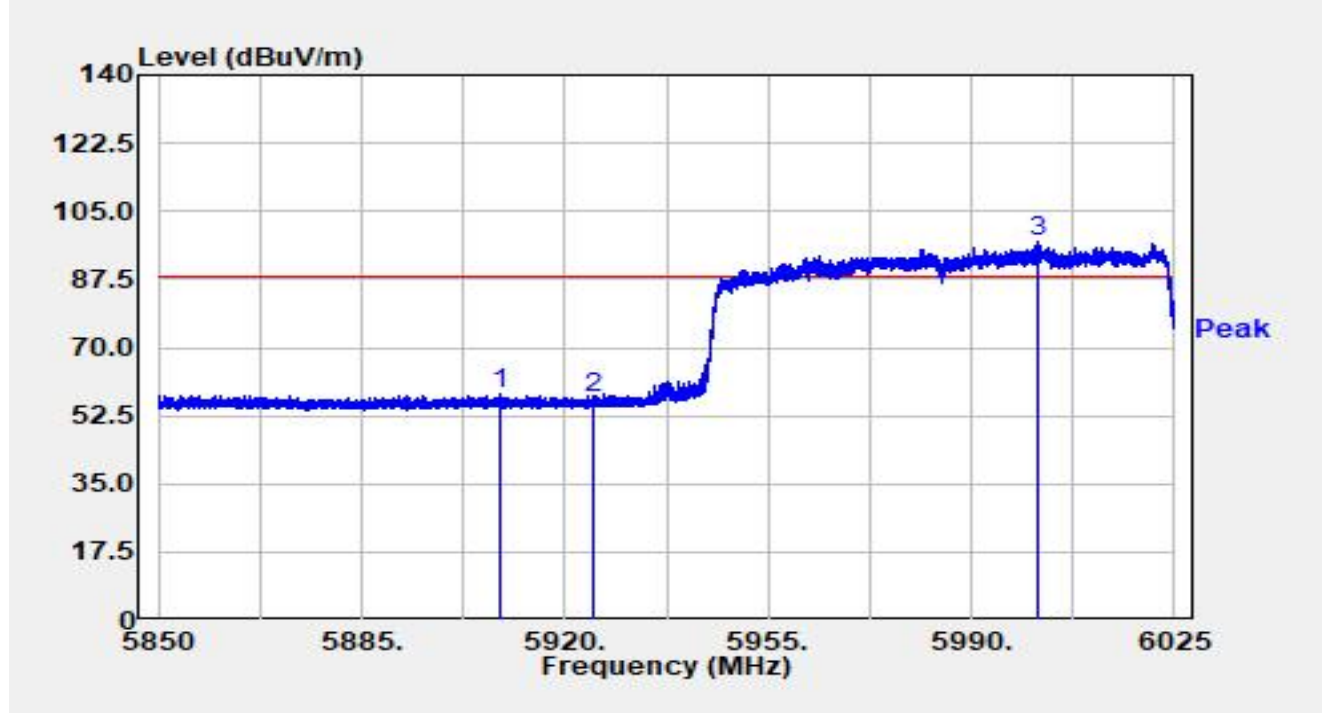


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5909.045	36.64	21.47	58.10	-30.10	88.20	Peak
2		5925.005	35.25	21.55	56.80	-31.40	88.20	Peak
3		6001.375	75.45	21.55	97.01	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

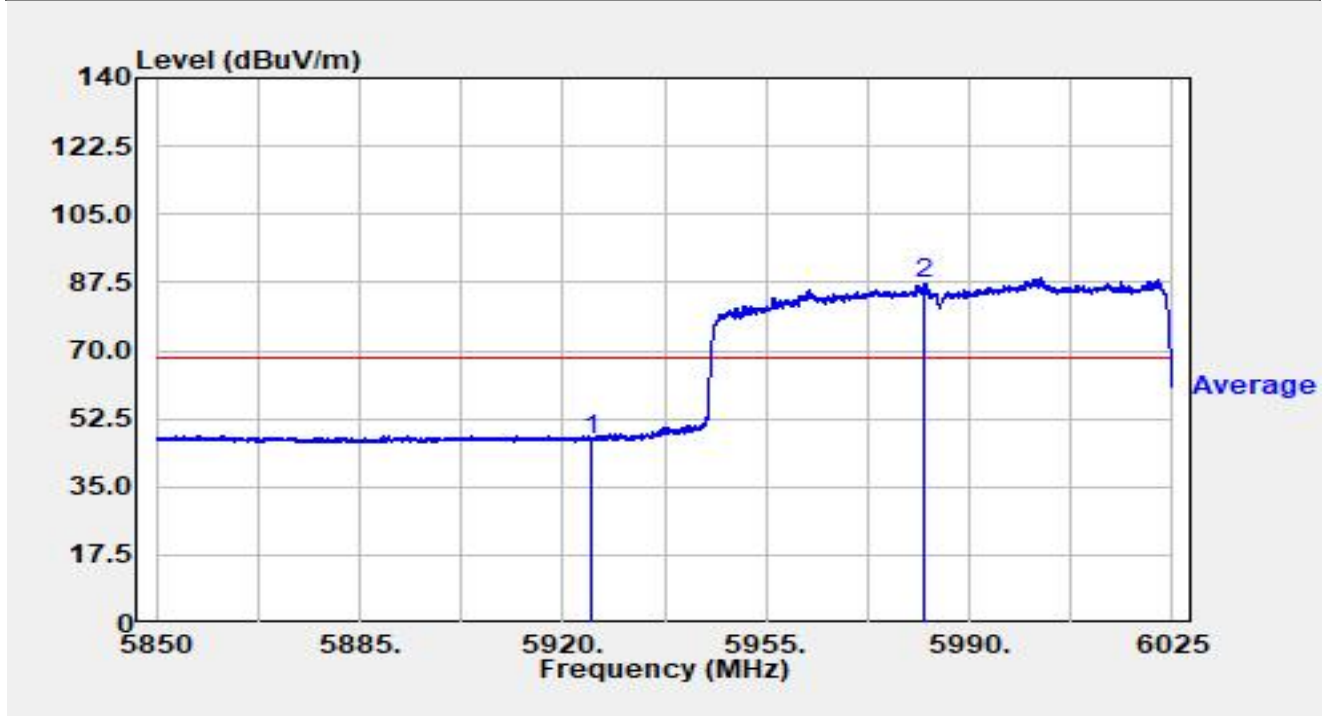


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	25.64	21.55	47.20	-21.00	68.20	Average
2		5982.335	65.85	21.34	87.20	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

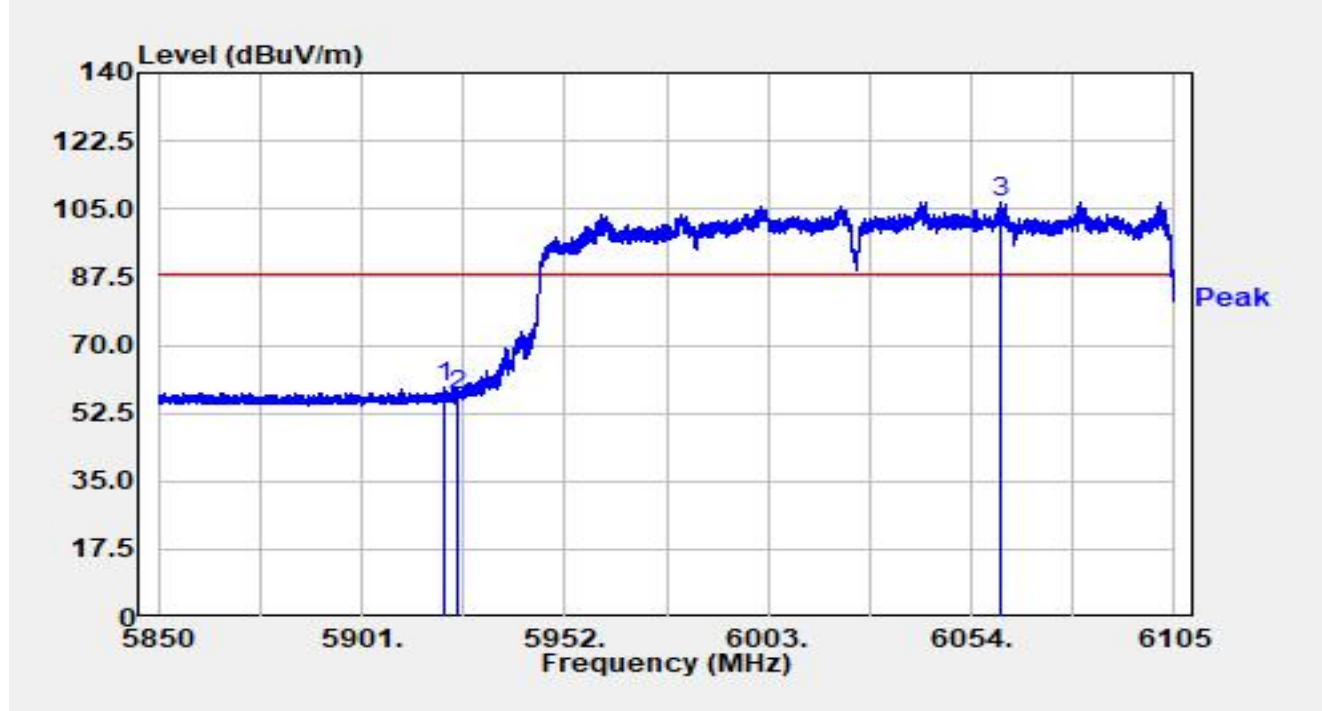


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.502	37.62	21.55	59.17	-29.03	88.20	Peak
2		5925.000	35.37	21.55	56.92	-31.28	88.20	Peak
3		6061.242	85.41	21.46	106.87	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

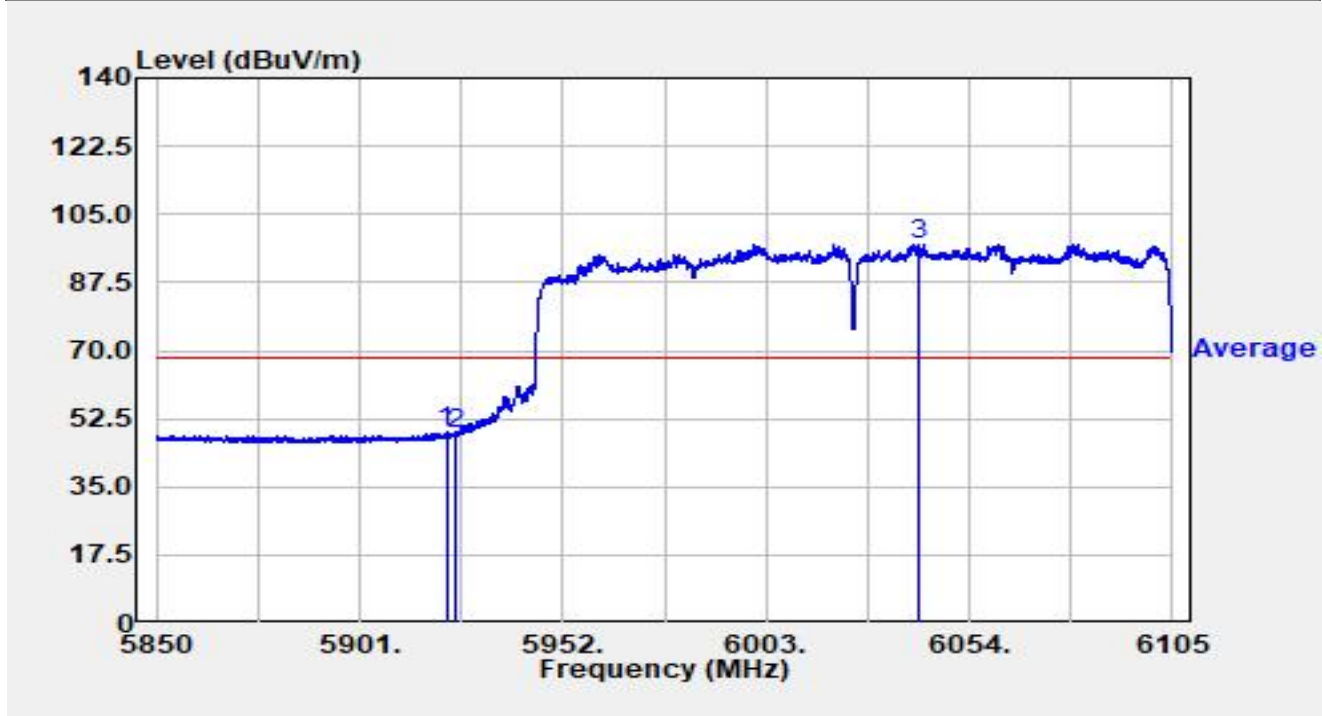


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.726	27.51	21.55	49.06	-19.14	68.20	Average
2		5925.000	27.15	21.55	48.70	-19.50	68.20	Average
3		6041.046	75.92	21.46	97.38	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

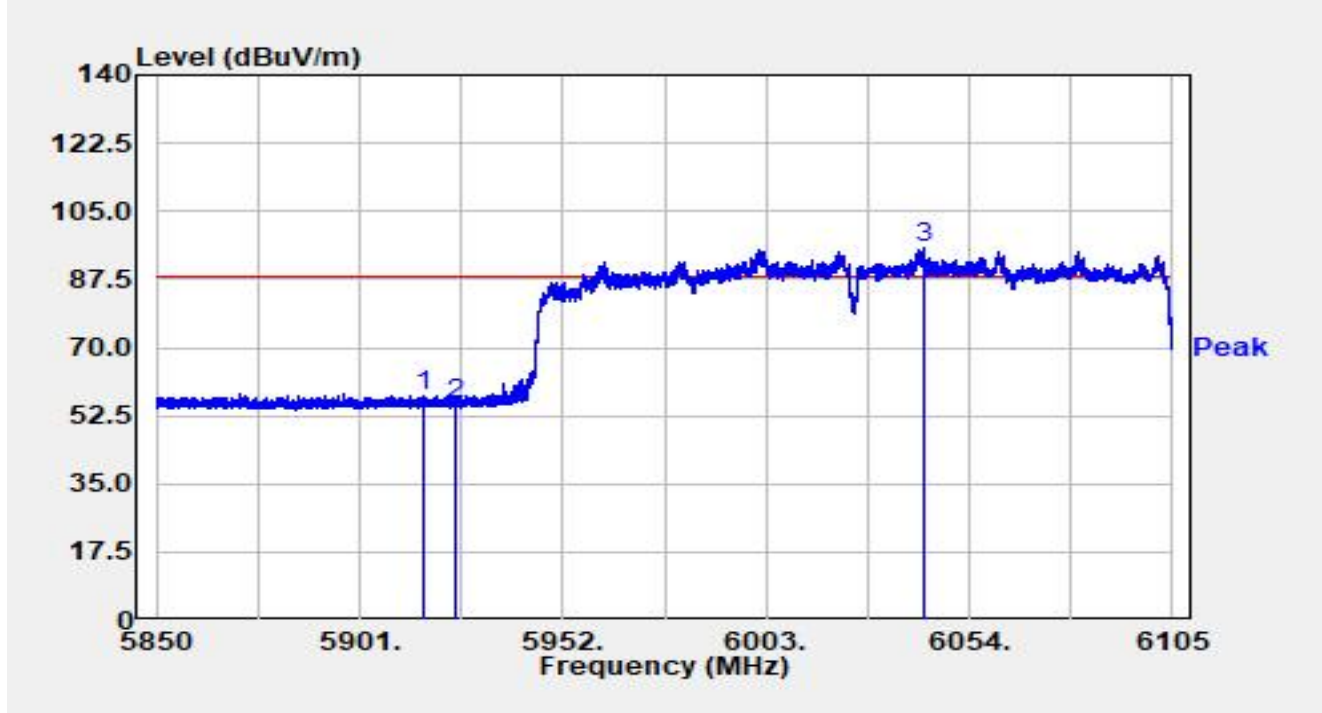


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5916.912	36.31	21.53	57.84	-30.36	88.20	Peak
2		5925.000	34.09	21.55	55.64	-32.56	88.20	Peak
3		6042.500	74.12	21.46	95.58	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

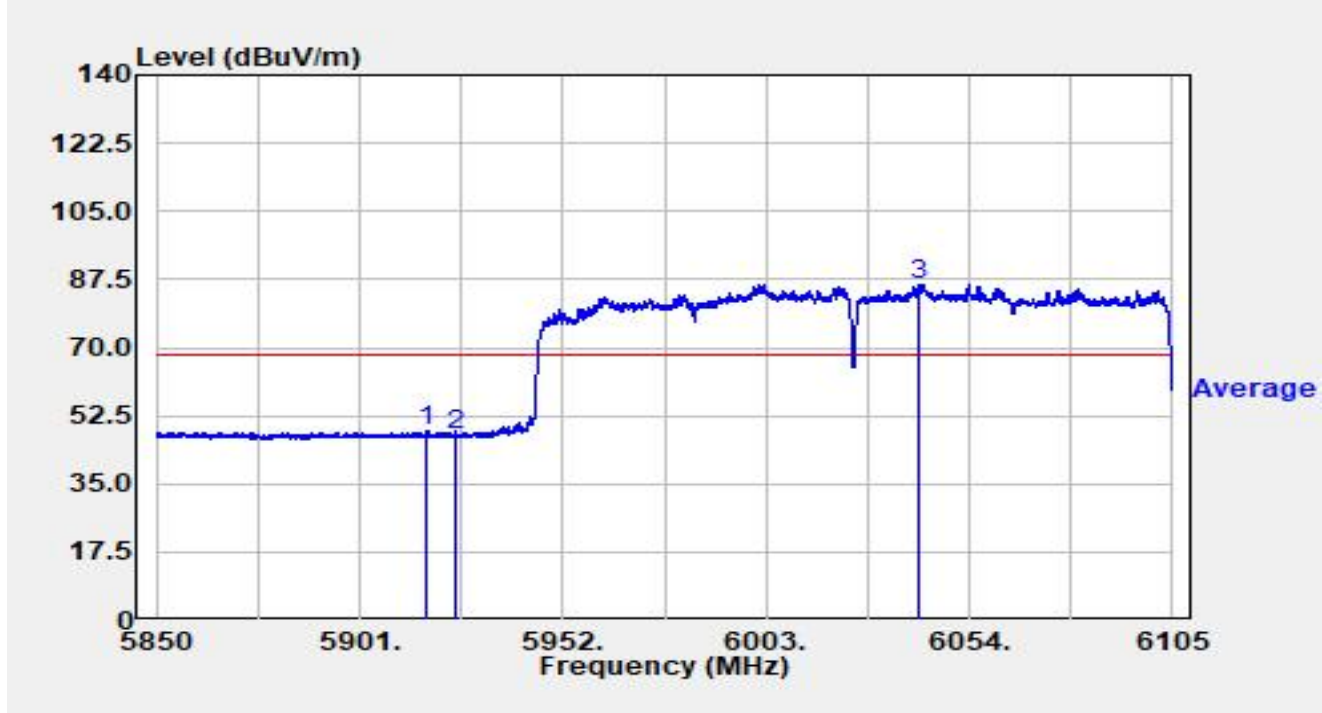


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.805	26.91	21.53	48.45	-19.75	68.20	Average
2		5925.000	25.96	21.55	47.52	-20.68	68.20	Average
3		6041.250	64.91	21.46	86.37	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

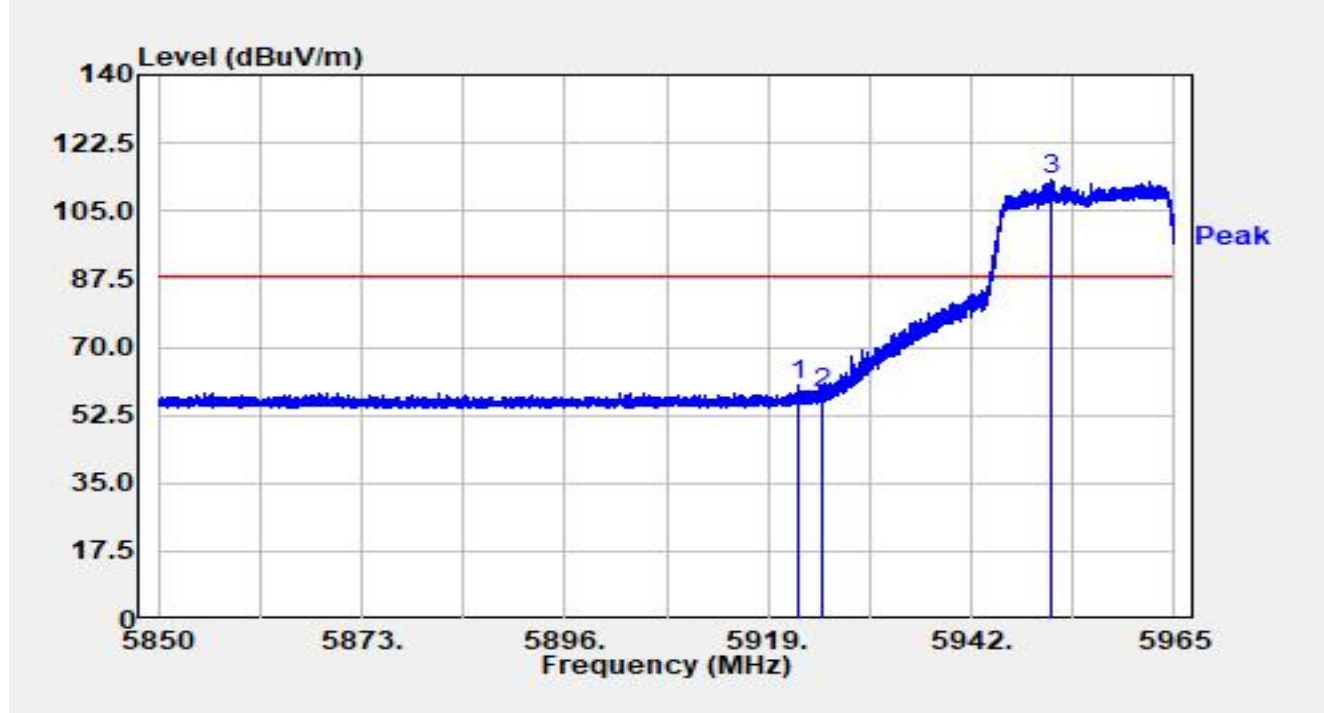


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5922.393	38.42	21.55	59.97	-28.23	88.20	Peak
2		5925.003	36.76	21.55	58.32	-29.88	88.20	Peak
3		5951.074	91.62	21.45	113.06	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

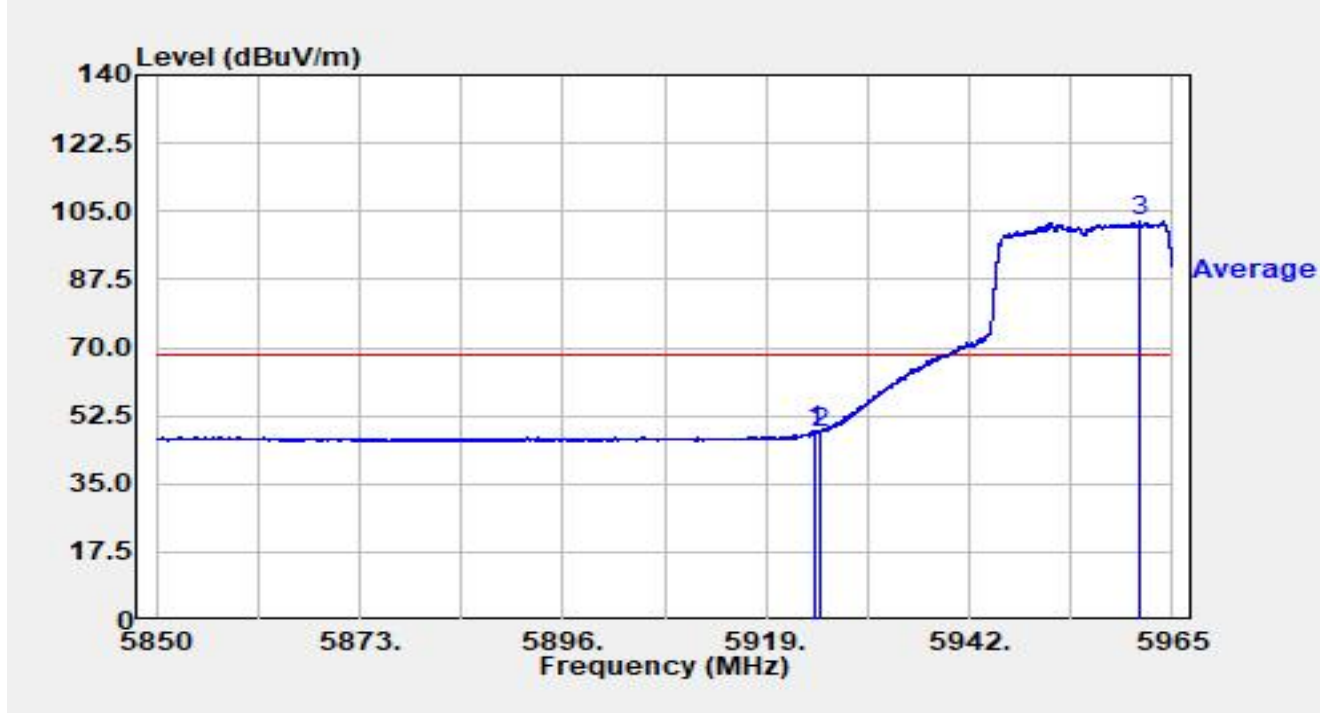


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.462	27.24	21.56	48.79	-19.41	68.20	Average
2		5925.000	26.71	21.55	48.27	-19.93	68.20	Average
3		5961.309	80.99	21.35	102.34	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

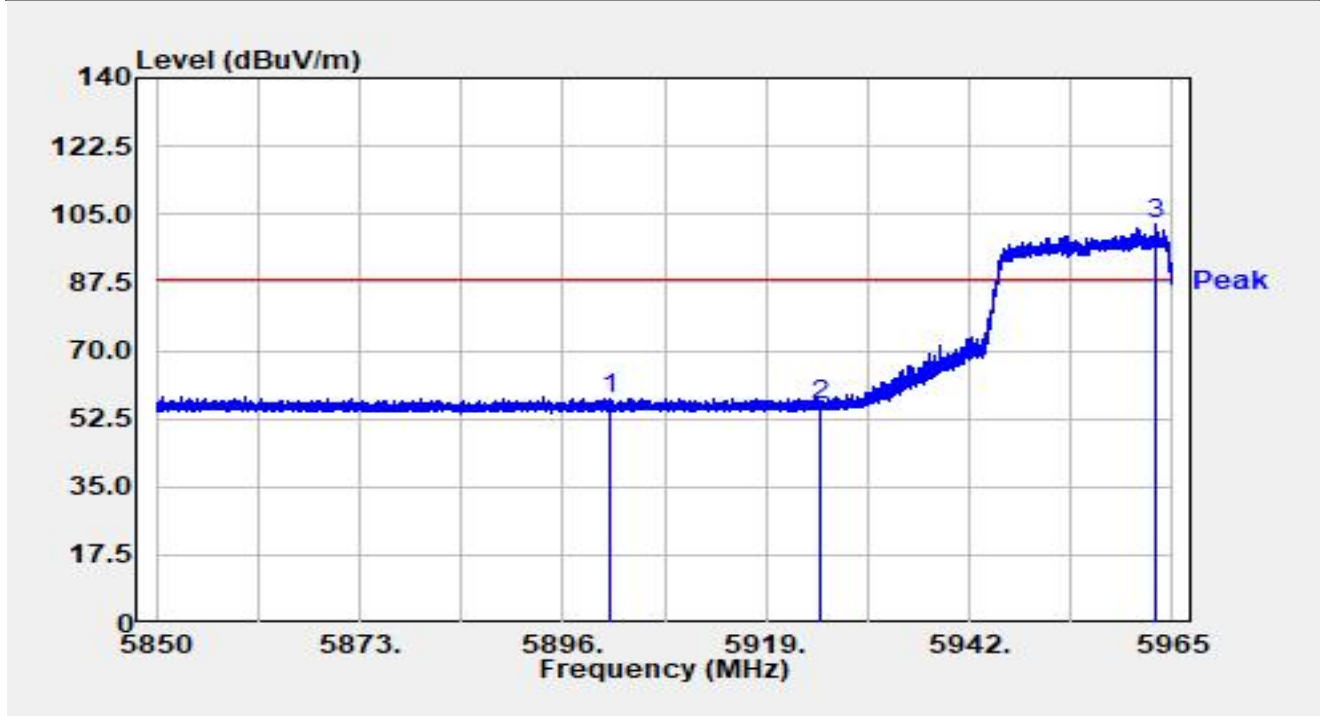


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5901.474	36.39	21.39	57.78	-30.42	88.20	Peak
2		5925.000	34.70	21.55	56.25	-31.95	88.20	Peak
3		5963.091	80.92	21.33	102.25	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

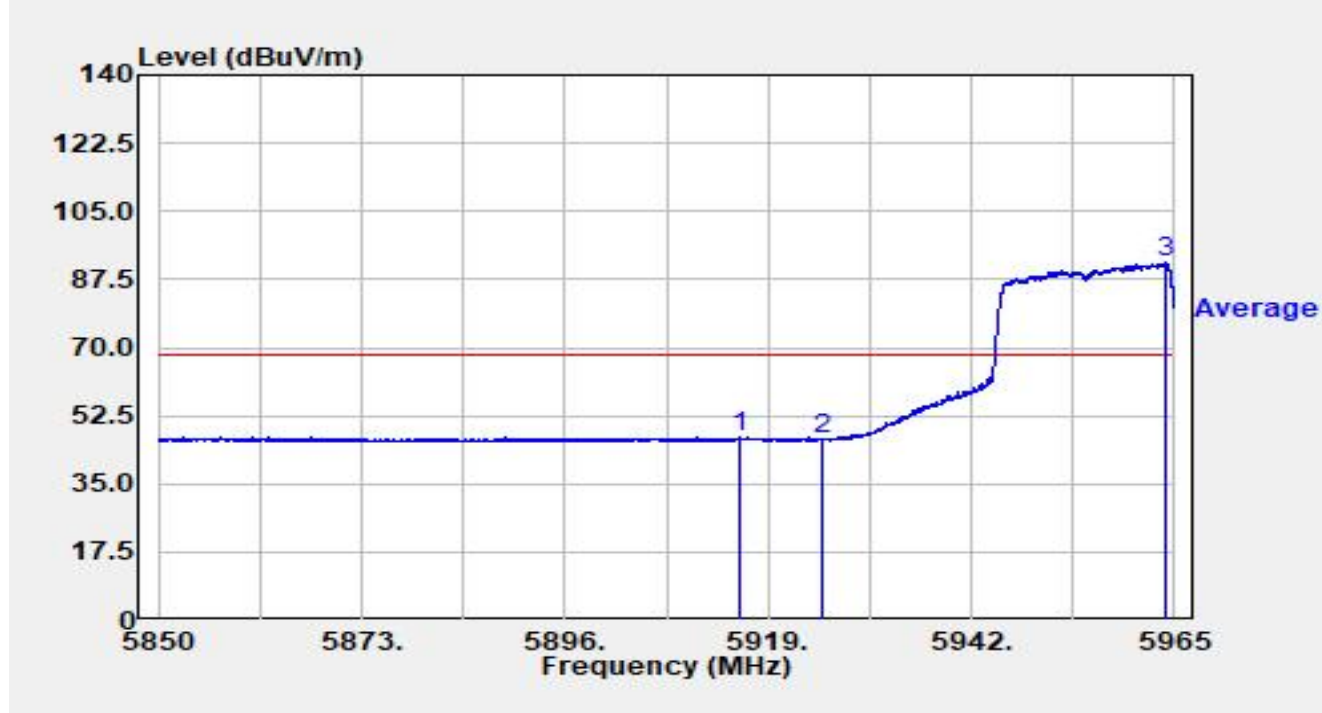


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5915.826	25.28	21.52	46.81	-21.39	68.20	Average
2		5925.000	25.11	21.55	46.66	-21.54	68.20	Average
3		5964.114	70.43	21.32	91.74	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

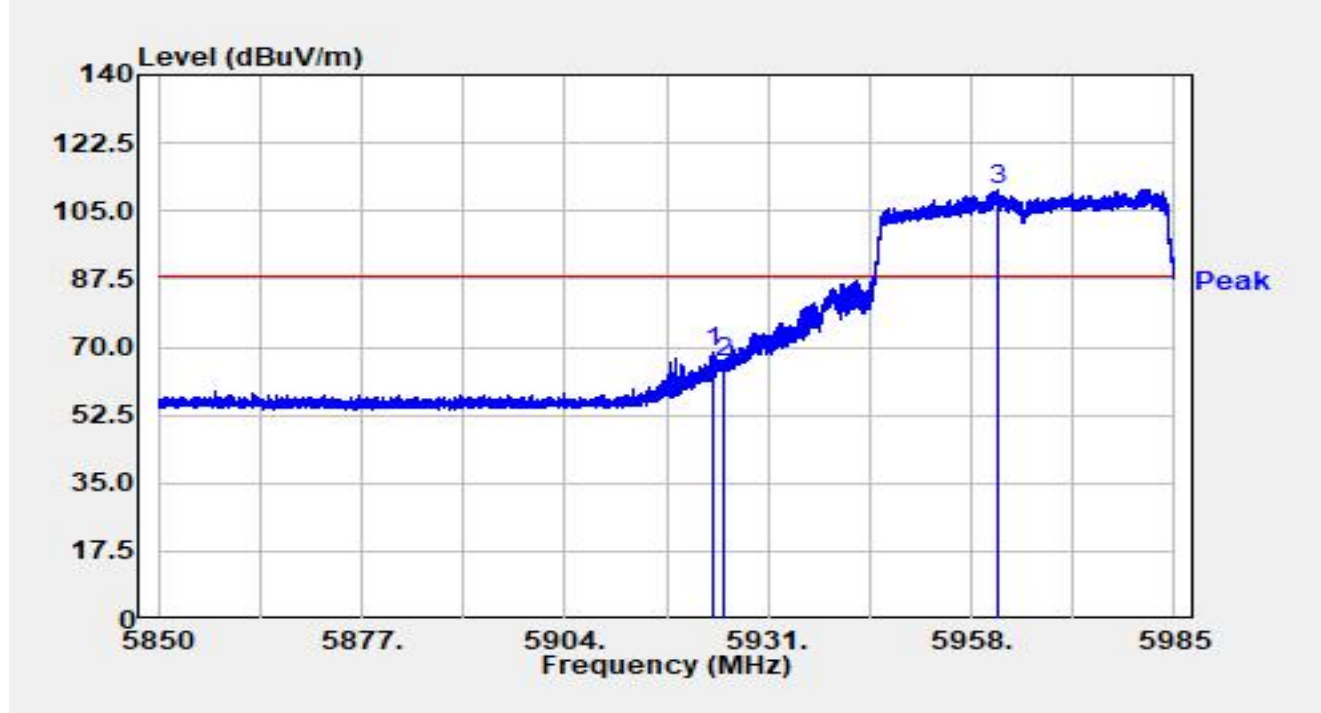


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.575	47.02	21.55	68.57	-19.63	88.20	Peak
2		5925.000	44.37	21.55	65.92	-22.28	88.20	Peak
3		5961.375	88.82	21.35	110.16	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

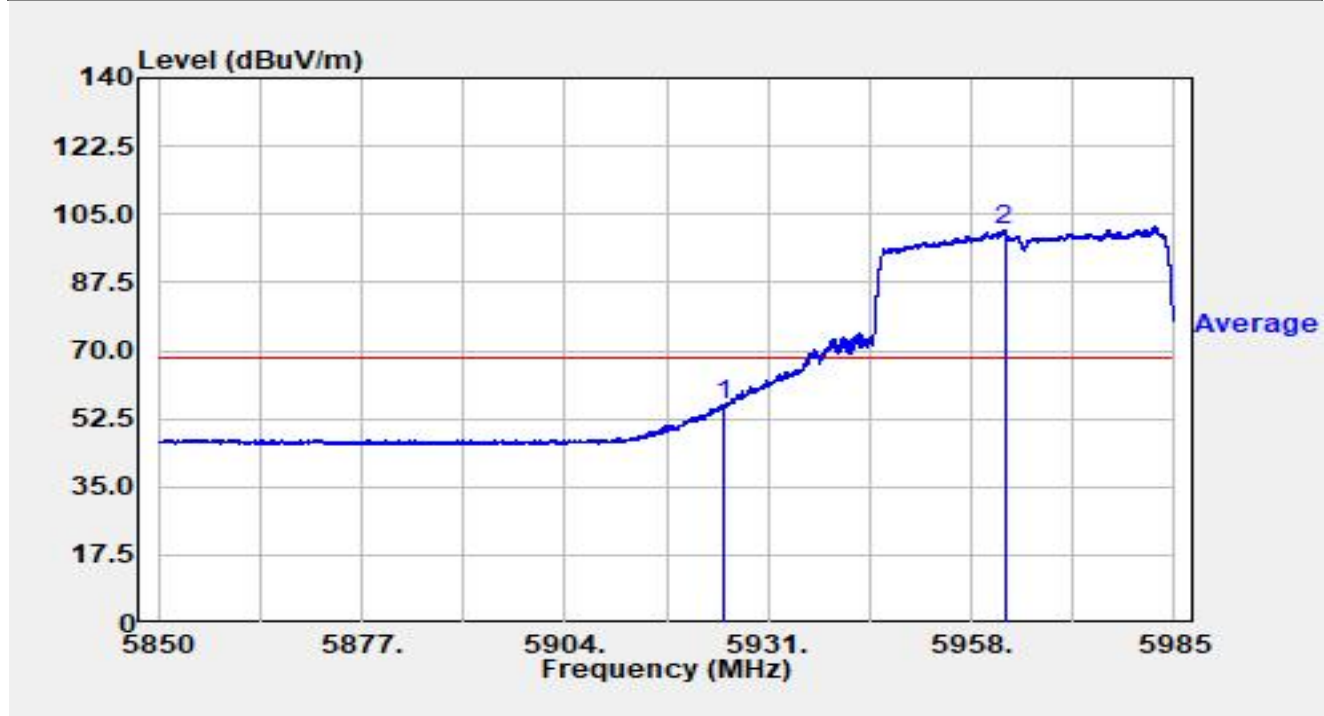


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	34.57	21.55	56.12	-12.08	68.20	Average
2		5962.428	79.74	21.33	101.08	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

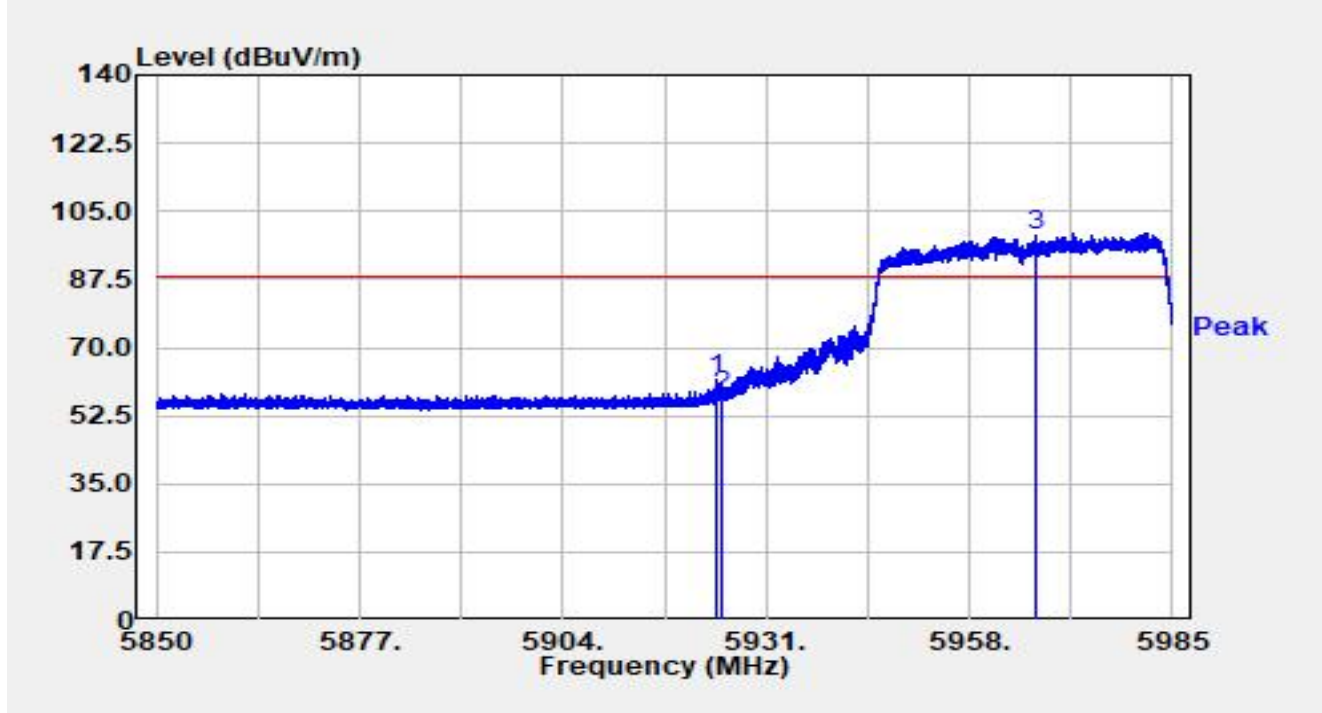


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.547	40.01	21.56	61.57	-26.63	88.20	Peak
2		5925.006	35.79	21.55	57.34	-30.86	88.20	Peak
3		5966.734	77.52	21.32	98.85	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

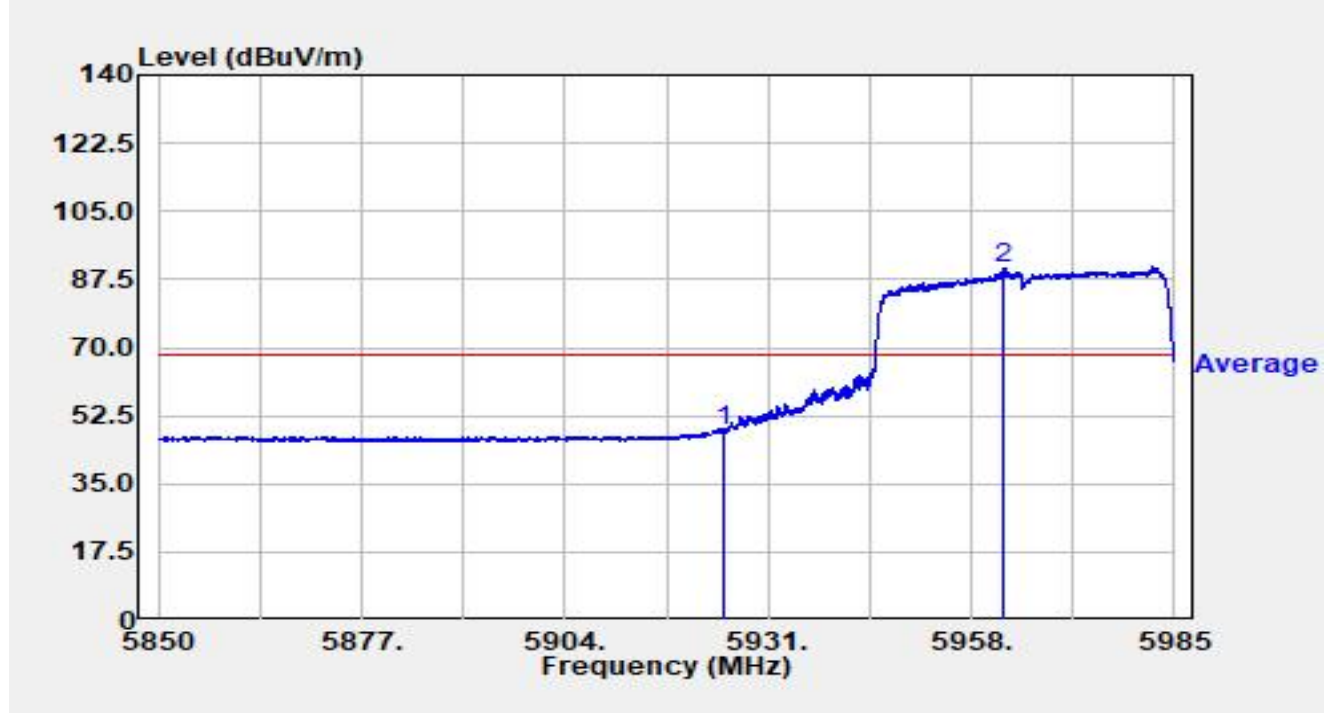


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.006	26.99	21.55	48.54	-19.66	68.20	Average
2		5962.320	69.07	21.34	90.41	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

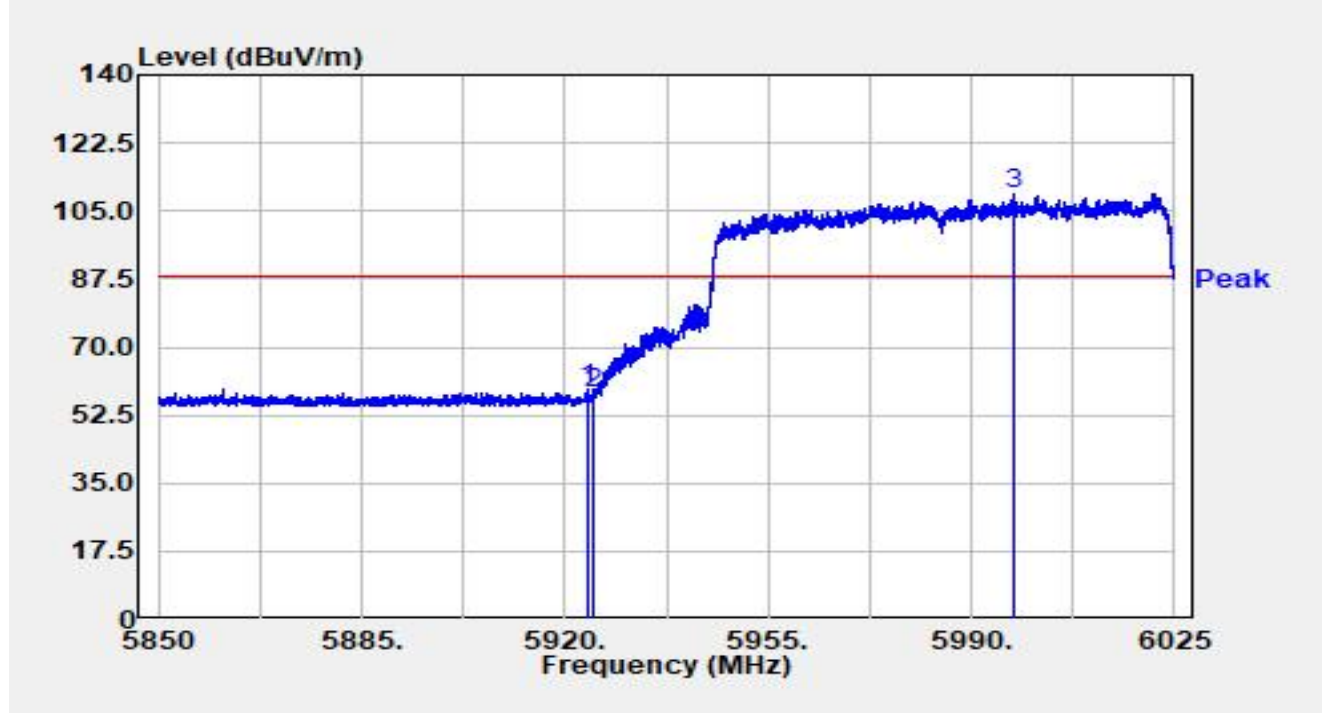


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.007	37.61	21.56	59.17	-29.03	88.20	Peak
2		5925.000	36.43	21.55	57.98	-30.22	88.20	Peak
3		5997.210	87.66	21.52	109.18	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

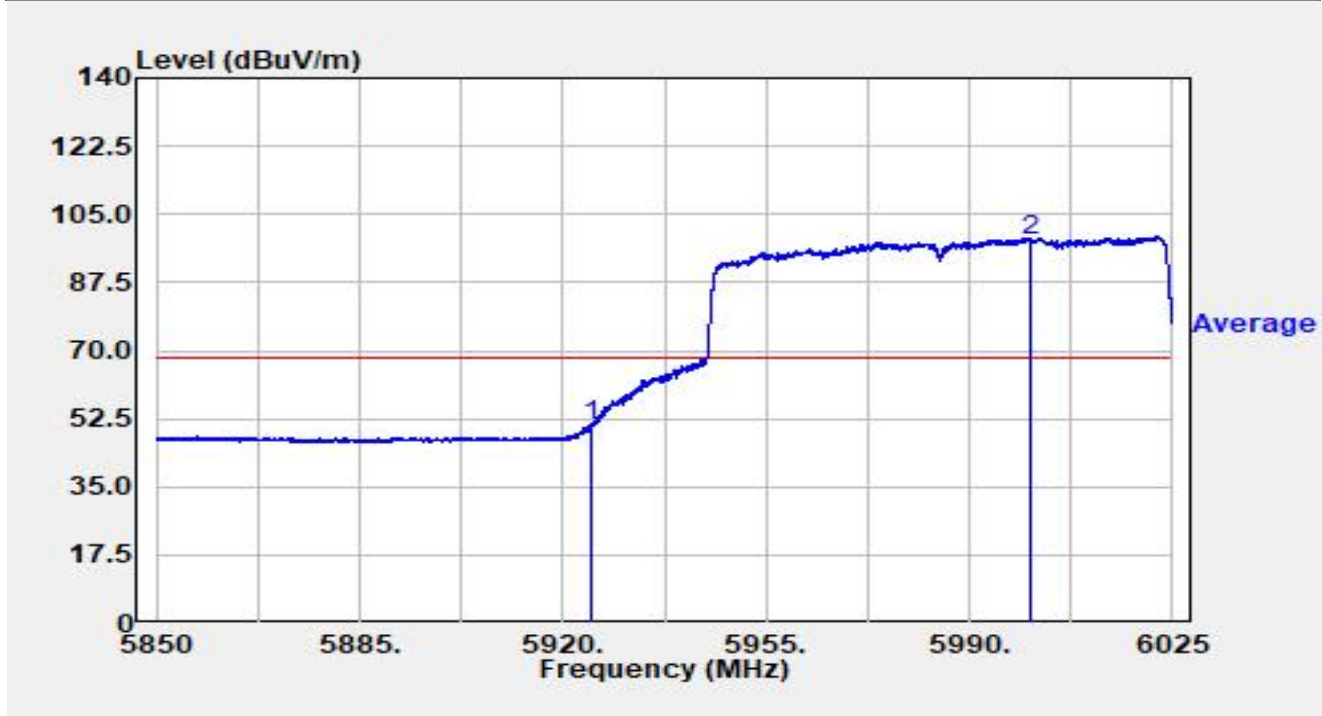


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	29.36	21.55	50.91	-17.29	68.20	Average
2		6000.623	76.95	21.55	98.50	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

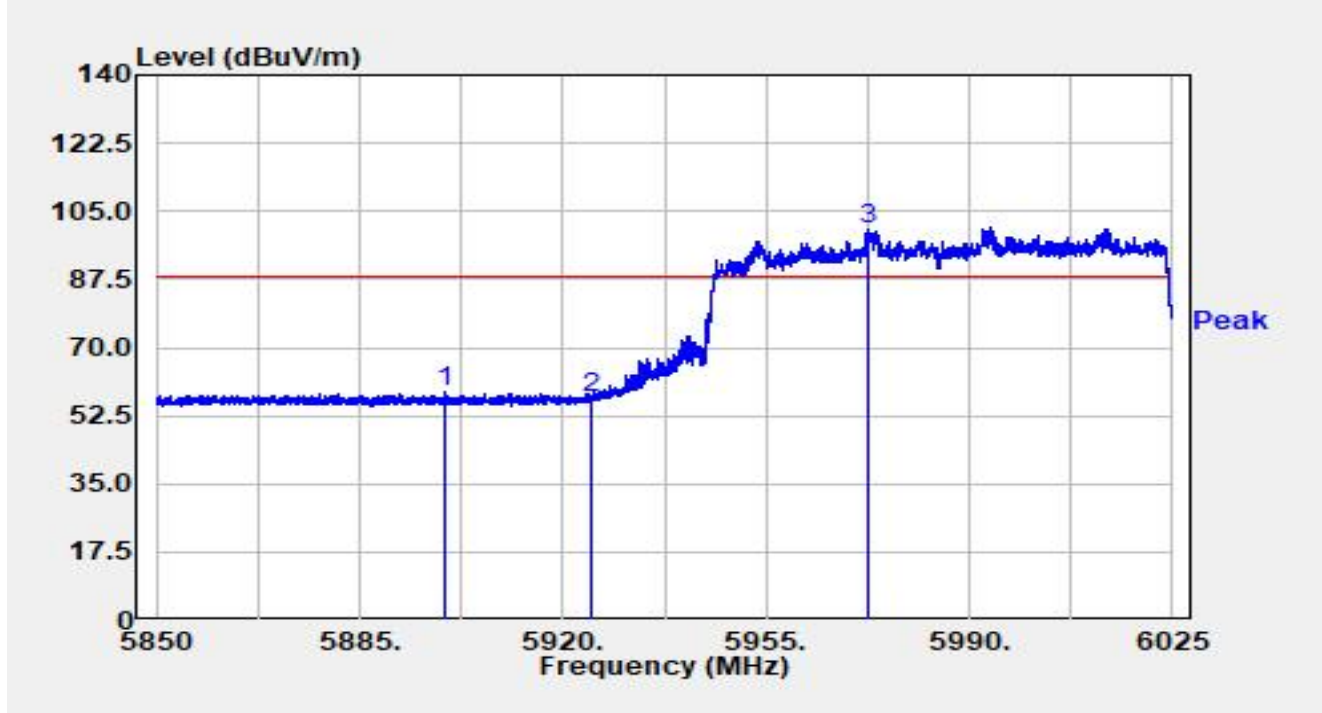


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5899.612	37.41	21.37	58.78	-29.42	88.20	Peak
2		5925.000	35.38	21.55	56.93	-31.27	88.20	Peak
3		5972.377	78.79	21.34	100.13	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

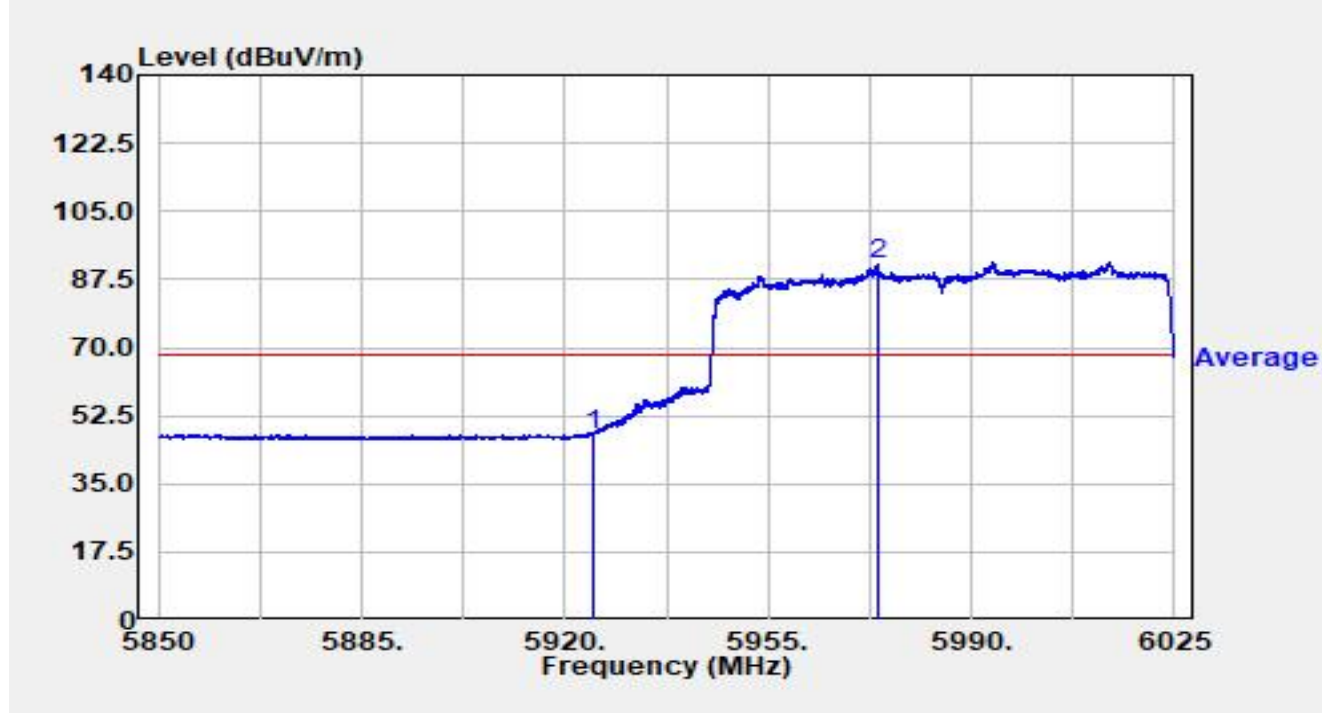


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	26.04	21.55	47.60	-20.60	68.20	Average
2		5973.760	69.82	21.34	91.16	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

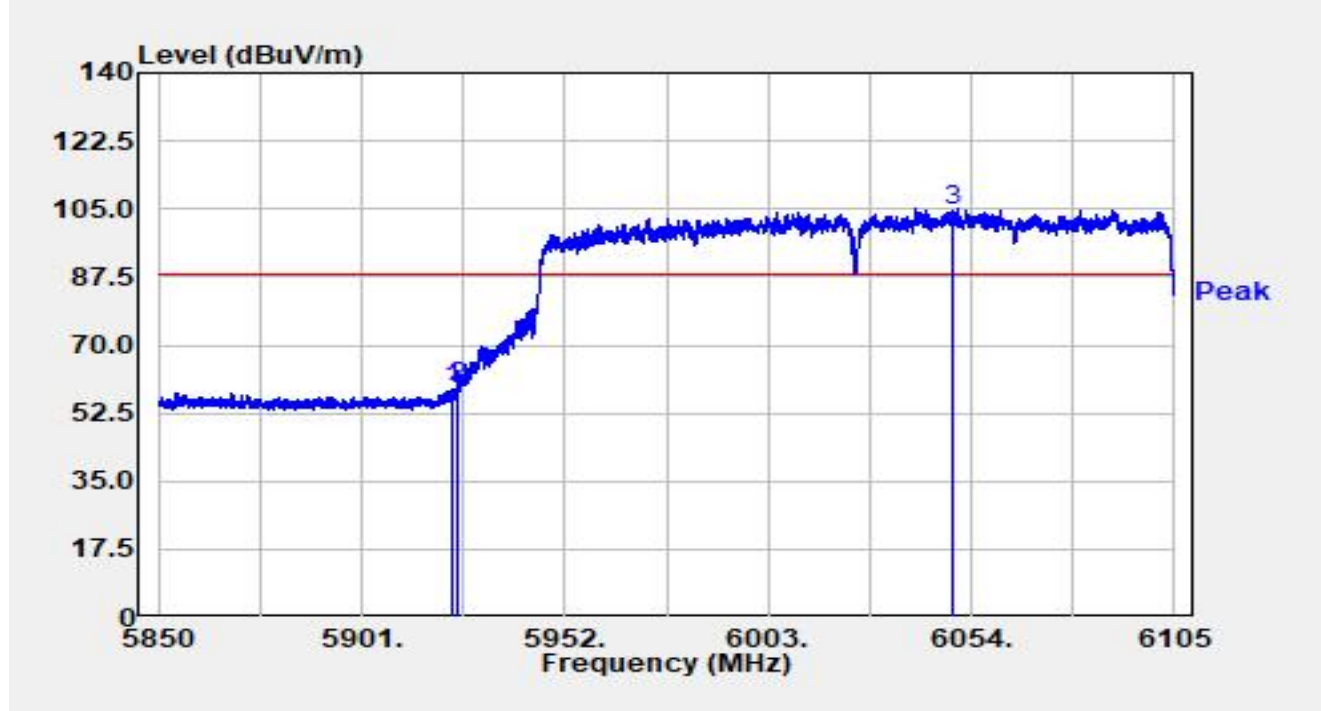


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5923.950	37.24	21.56	58.80	-29.40	88.20	Peak
2	*	5925.000	37.82	21.55	59.37	-28.83	88.20	Peak
3		6049.053	82.90	21.46	104.35	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

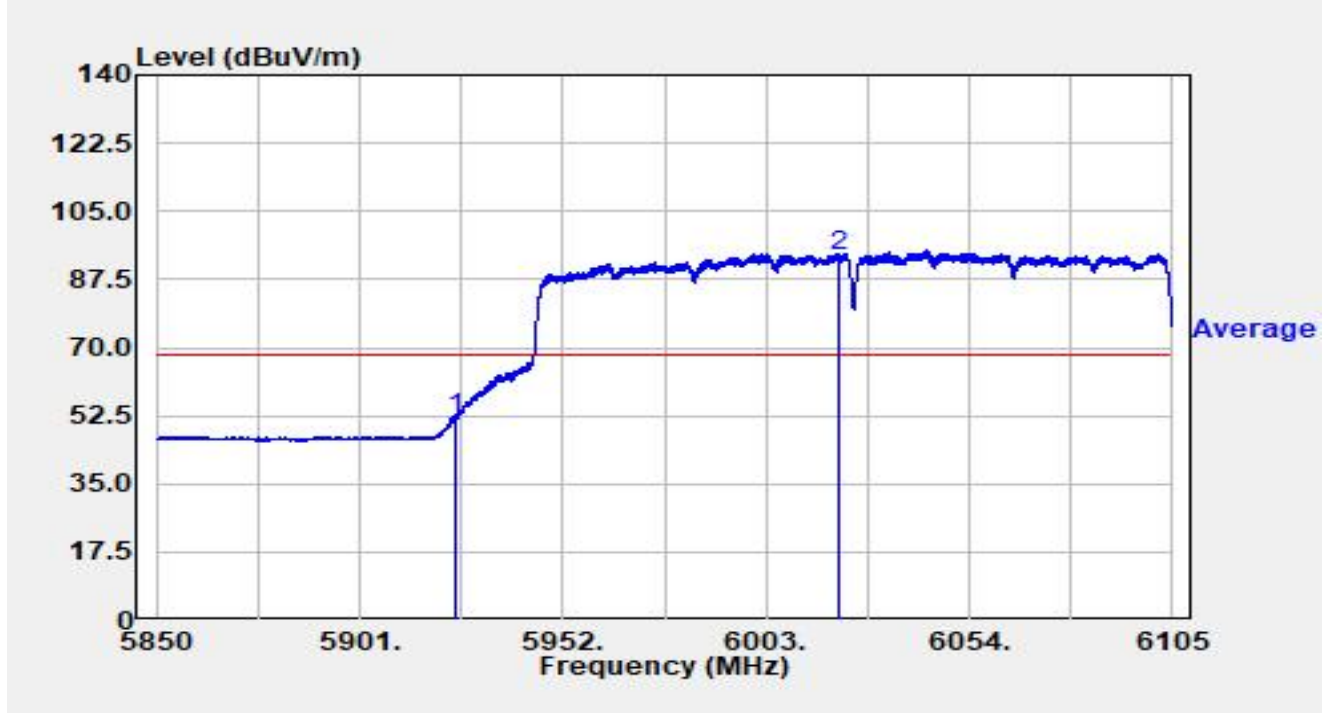


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	30.22	21.55	51.78	-16.42	68.20	Average
2		6021.334	71.96	21.57	93.53	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

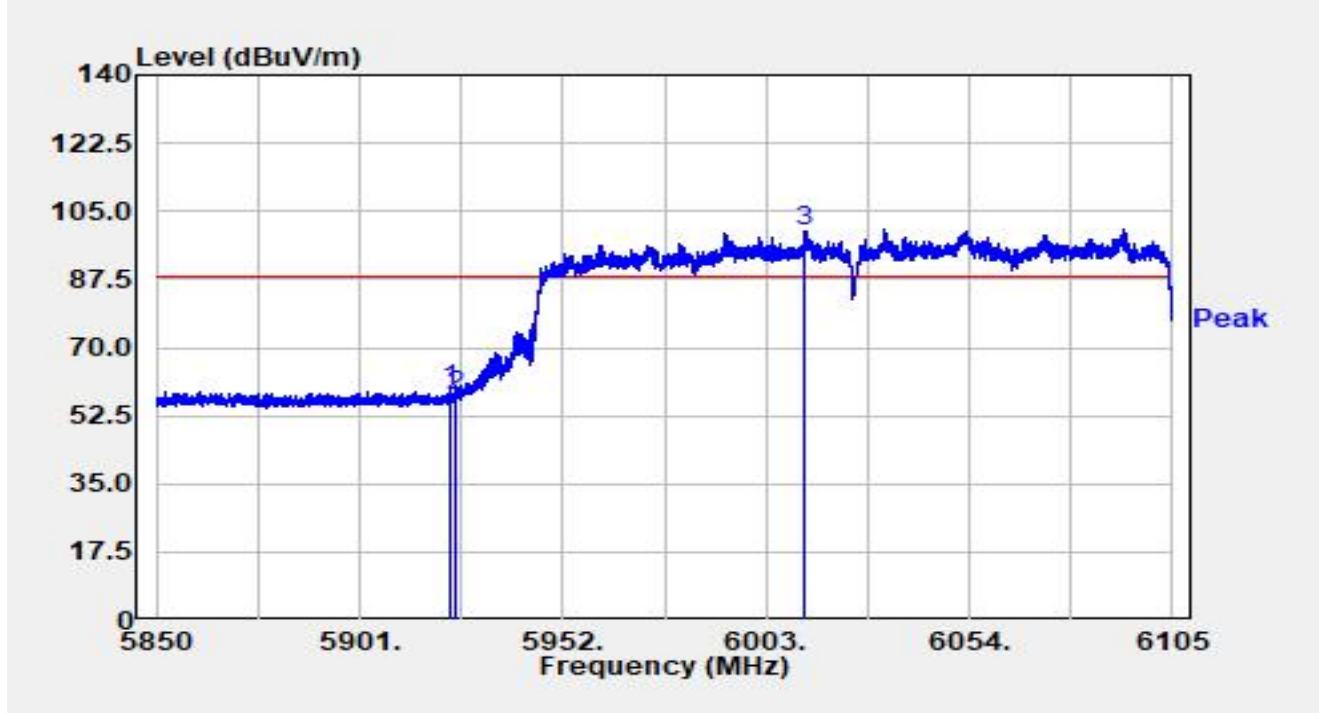


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5923.440	37.39	21.55	58.95	-29.25	88.20	Peak
2		5925.000	36.18	21.55	57.73	-30.47	88.20	Peak
3		6012.715	78.46	21.62	100.09	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

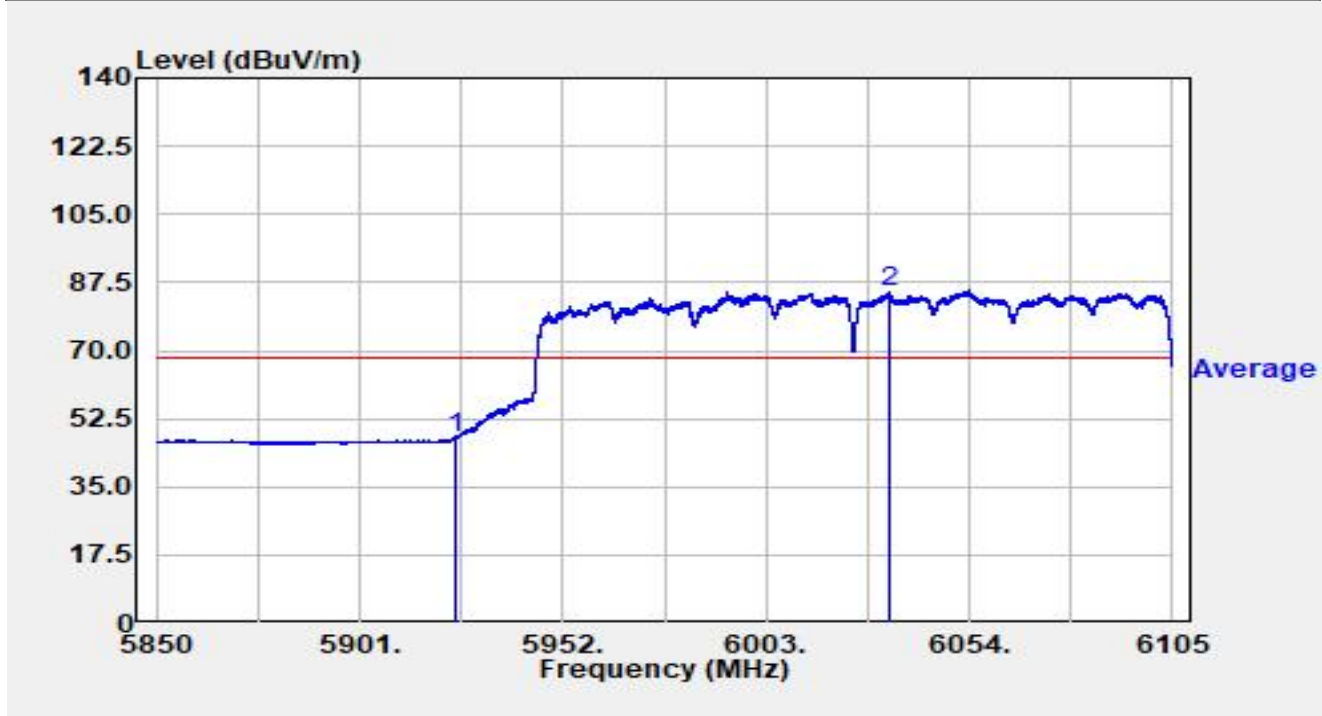


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	25.95	21.55	47.51	-20.69	68.20	Average
2		6033.932	63.44	21.47	84.91	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

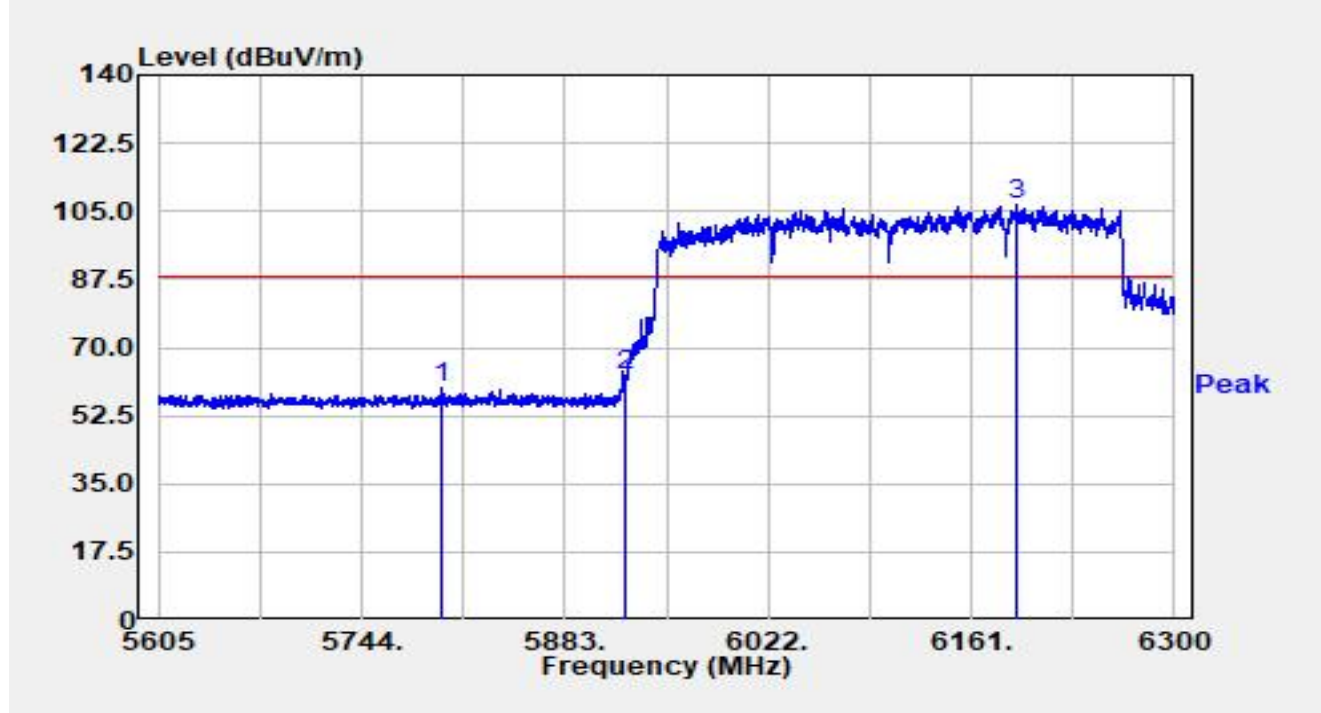


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5799.040	38.18	21.36	59.54	-28.66	88.20	Peak
2	*	5925.000	41.40	21.55	62.95	-25.25	88.20	Peak
3		6191.740	84.31	22.17	106.49	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

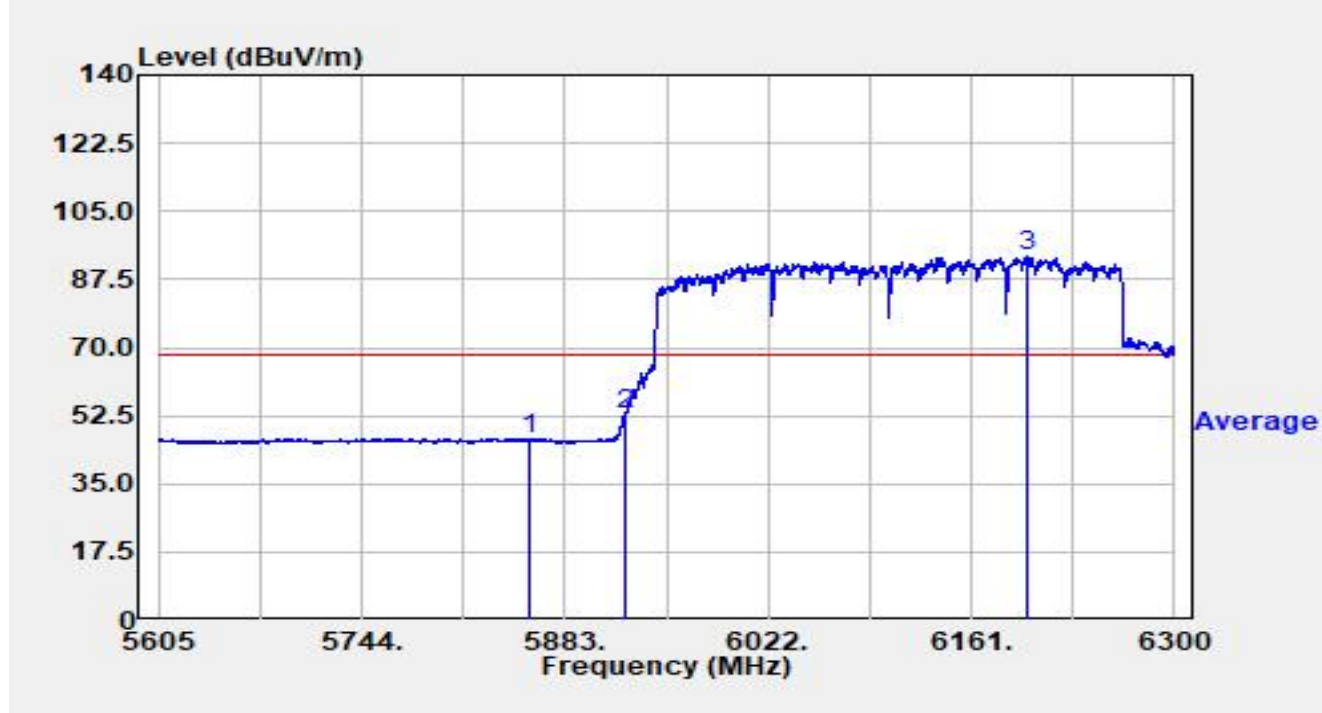


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5859.520	25.06	21.58	46.65	-21.55	68.20	Average
2	*	5925.000	31.09	21.55	52.65	-15.55	68.20	Average
3		6198.880	71.36	22.16	93.52	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

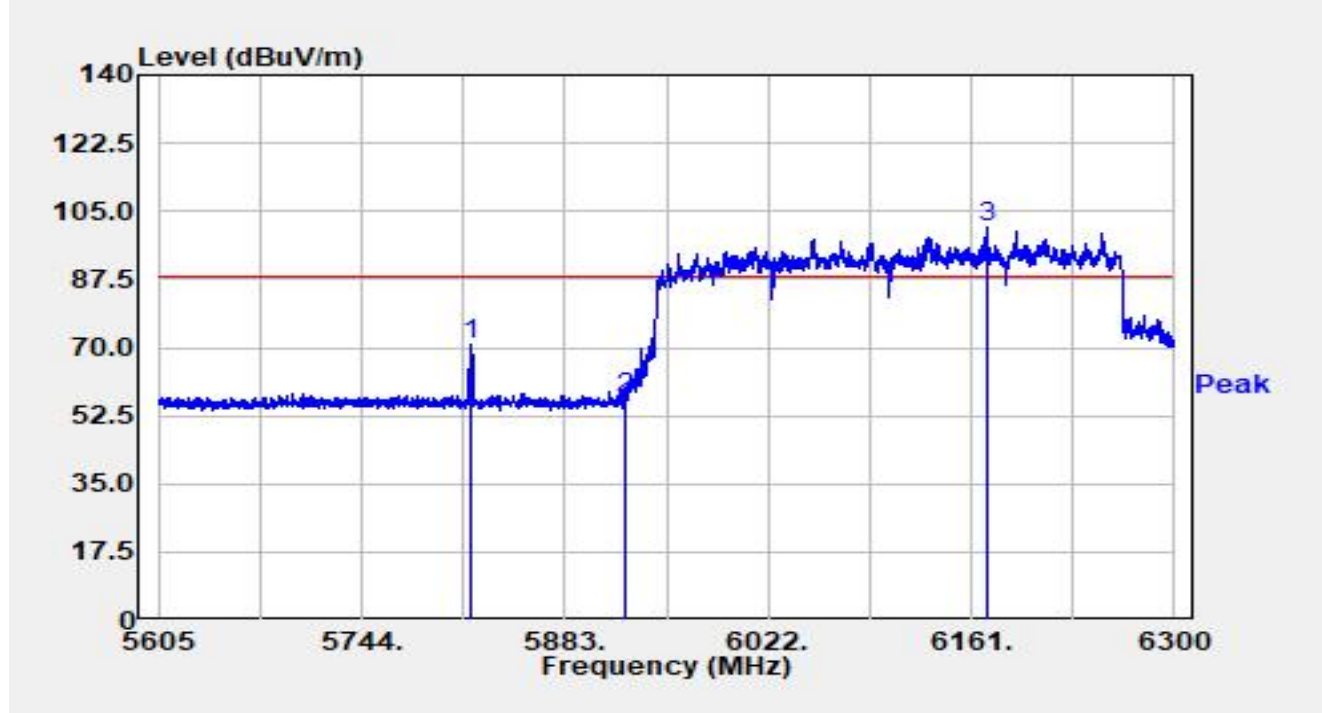


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5819.410	49.17	21.37	70.54	-17.66	88.20	Peak
2		5925.000	35.53	21.55	57.08	-31.12	88.20	Peak
3		6171.160	78.81	22.06	100.87	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-29
Test Engineer	Charles Zhang	Temp./Humidity	25.1°C /62.9%
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6105MHz		

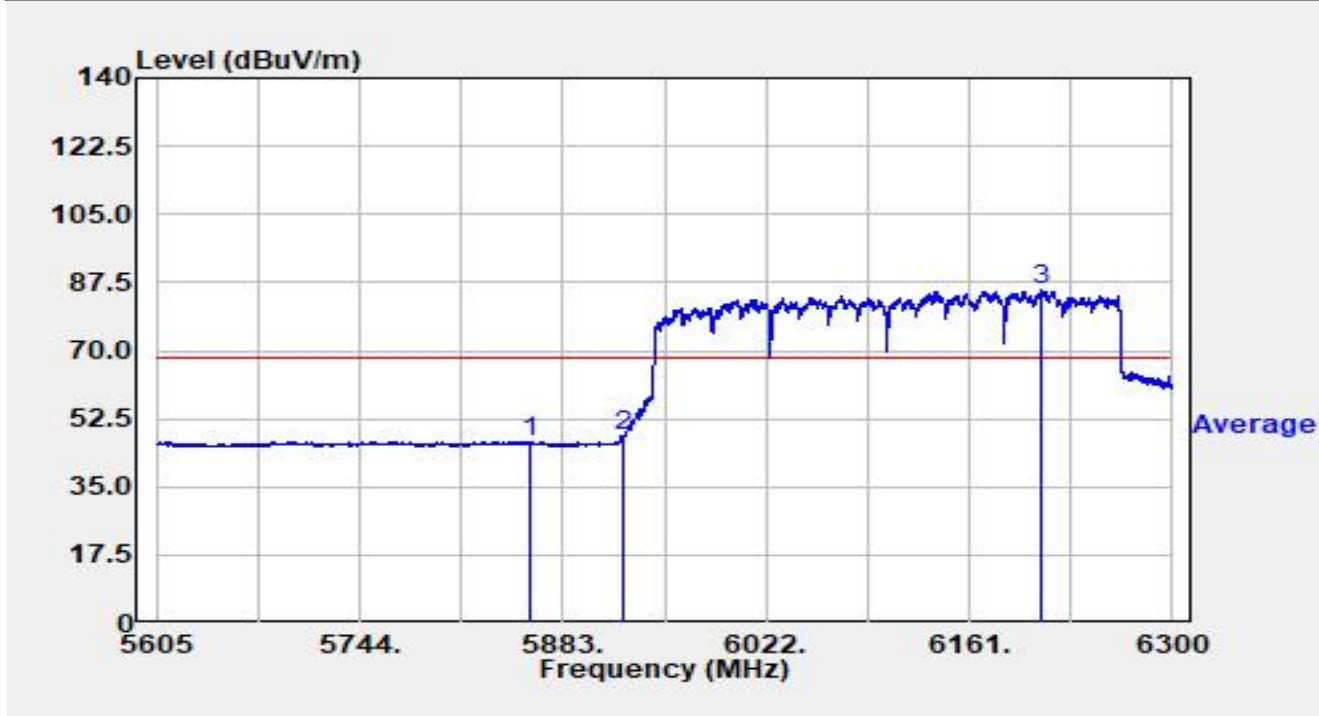


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5859.940	25.00	21.58	46.59	-21.61	68.20	Average
2	*	5925.000	26.27	21.55	47.82	-20.38	68.20	Average
3		6210.010	63.36	22.18	85.54	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Antenna_348:

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

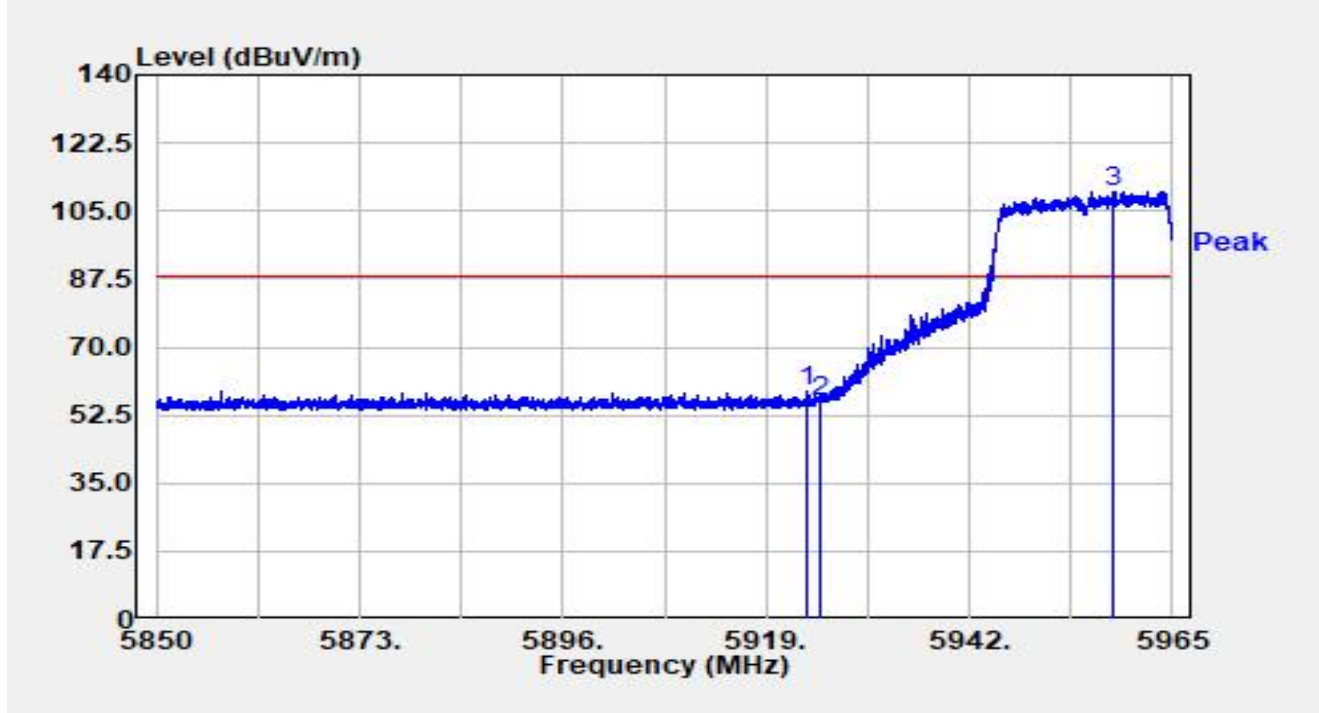


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.508	38.31	20.59	58.89	-29.31	88.20	Peak
2		5925.000	35.27	20.60	55.88	-32.32	88.20	Peak
3		5958.204	89.32	20.59	109.91	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

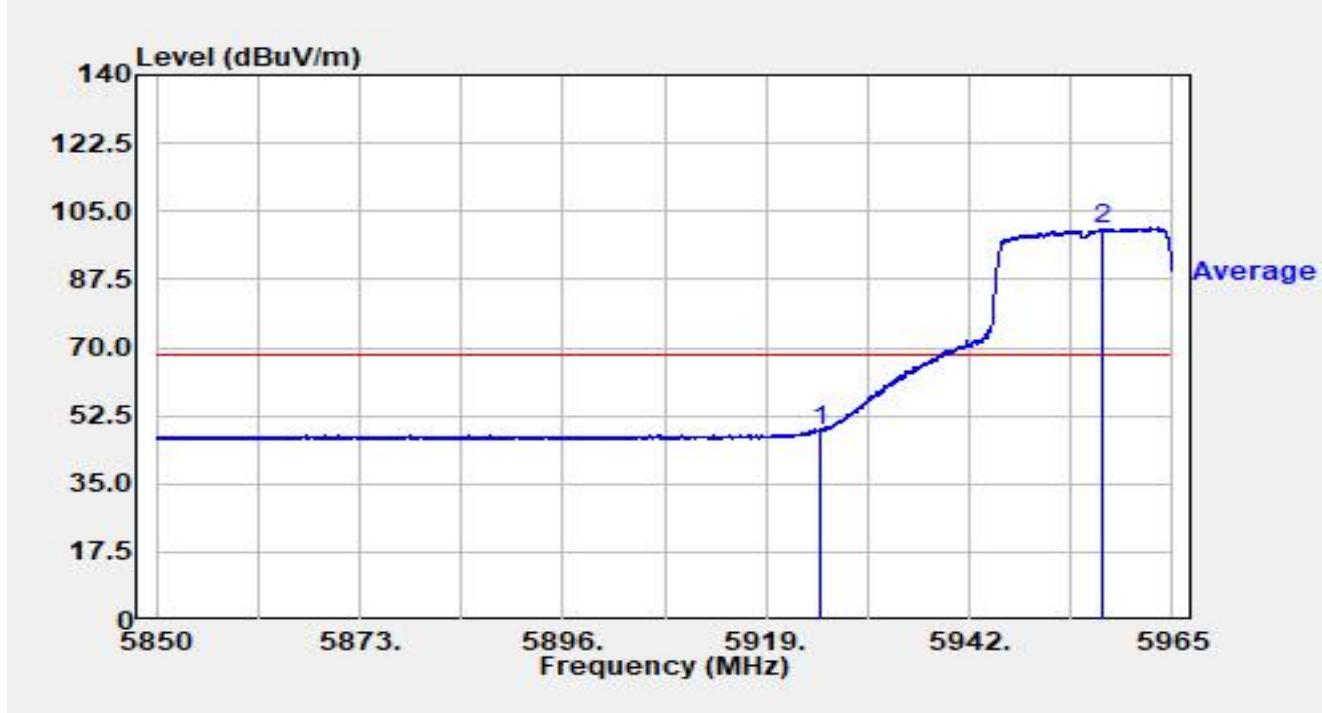


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	28.24	20.60	48.85	-19.35	68.20	Average
2		5956.973	80.01	20.61	100.62	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

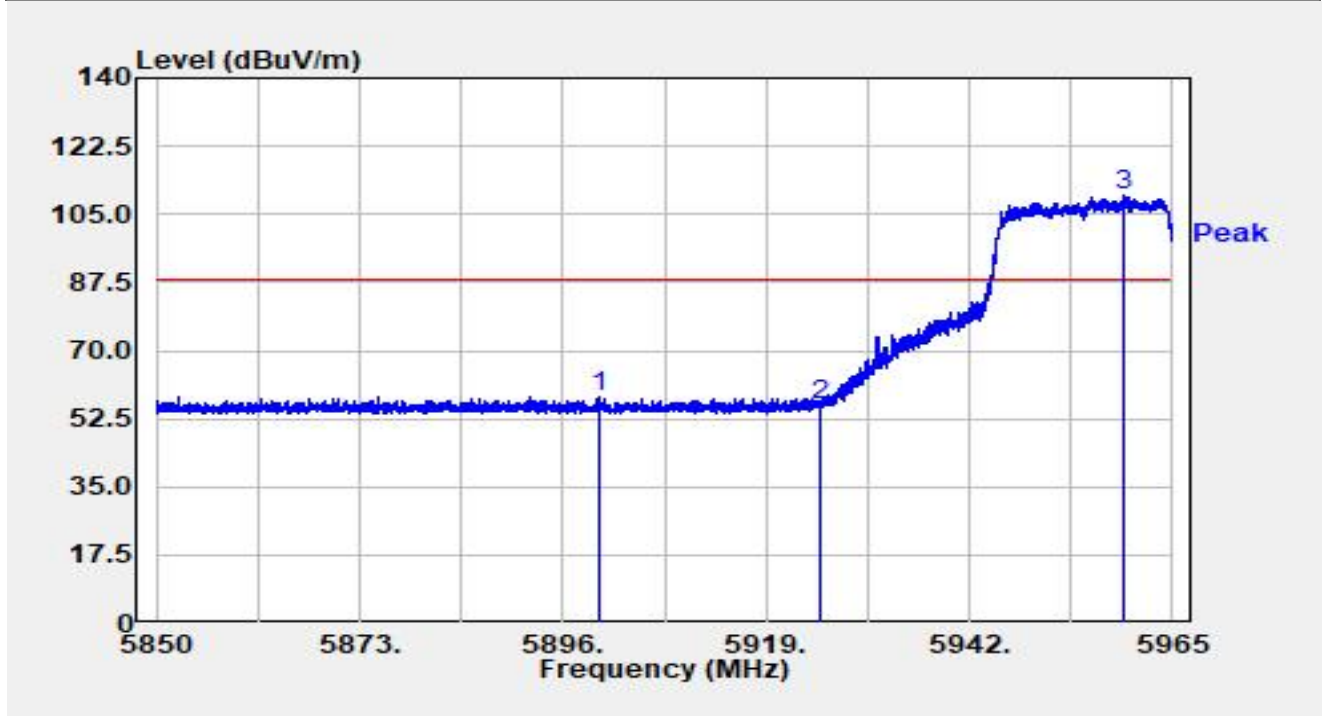


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5899.991	37.76	20.43	58.20	-30.00	88.20	Peak
2		5925.000	35.52	20.60	56.13	-32.07	88.20	Peak
3		5959.422	89.43	20.58	110.01	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5955MHz		

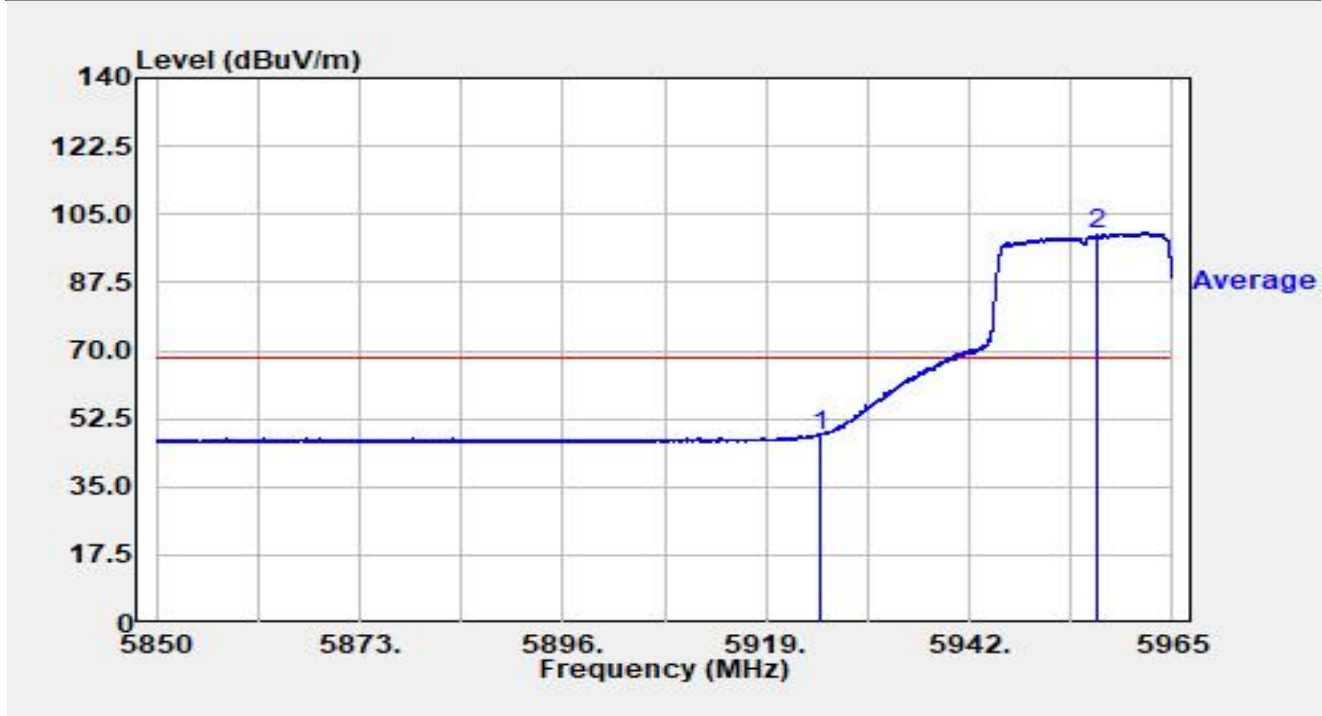


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.003	27.56	20.60	48.17	-20.03	68.20	Average
2		5956.479	79.14	20.62	99.75	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

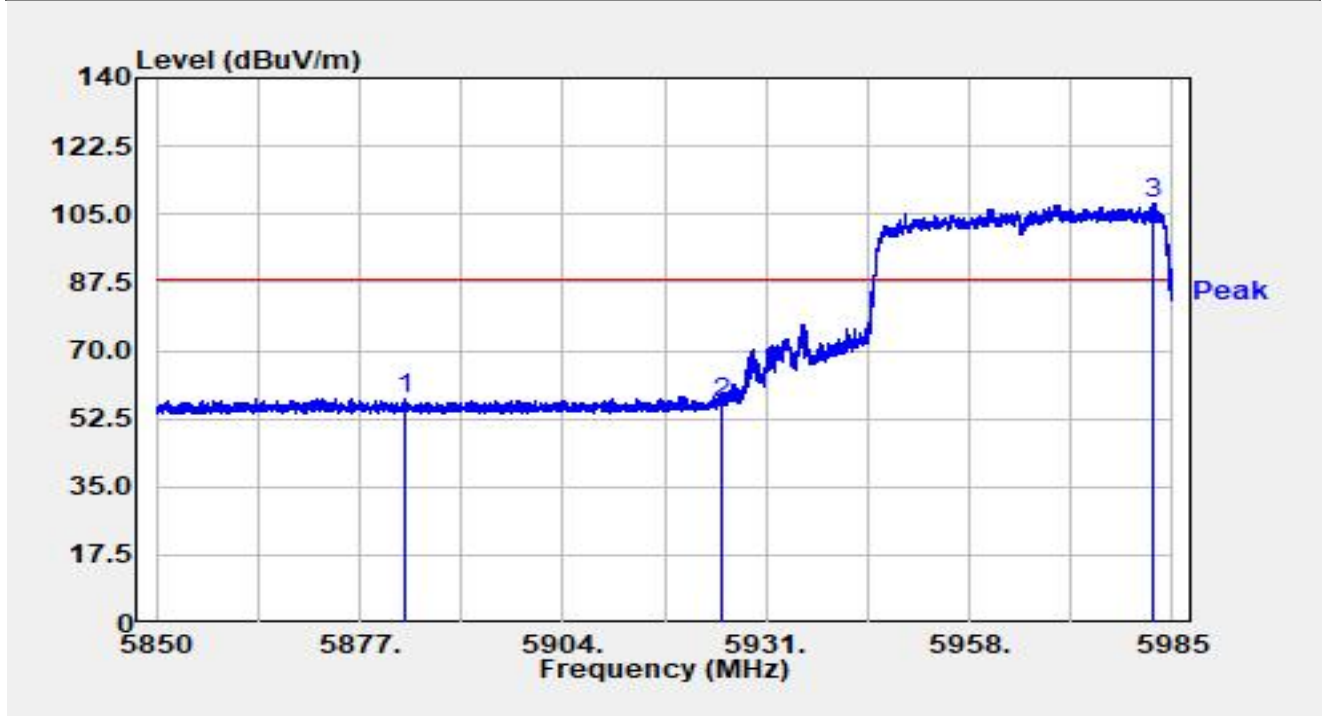


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5882.899	37.23	20.49	57.72	-30.48	88.20	Peak
2		5925.006	35.82	20.60	56.42	-31.78	88.20	Peak
3		5982.570	87.23	20.59	107.82	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

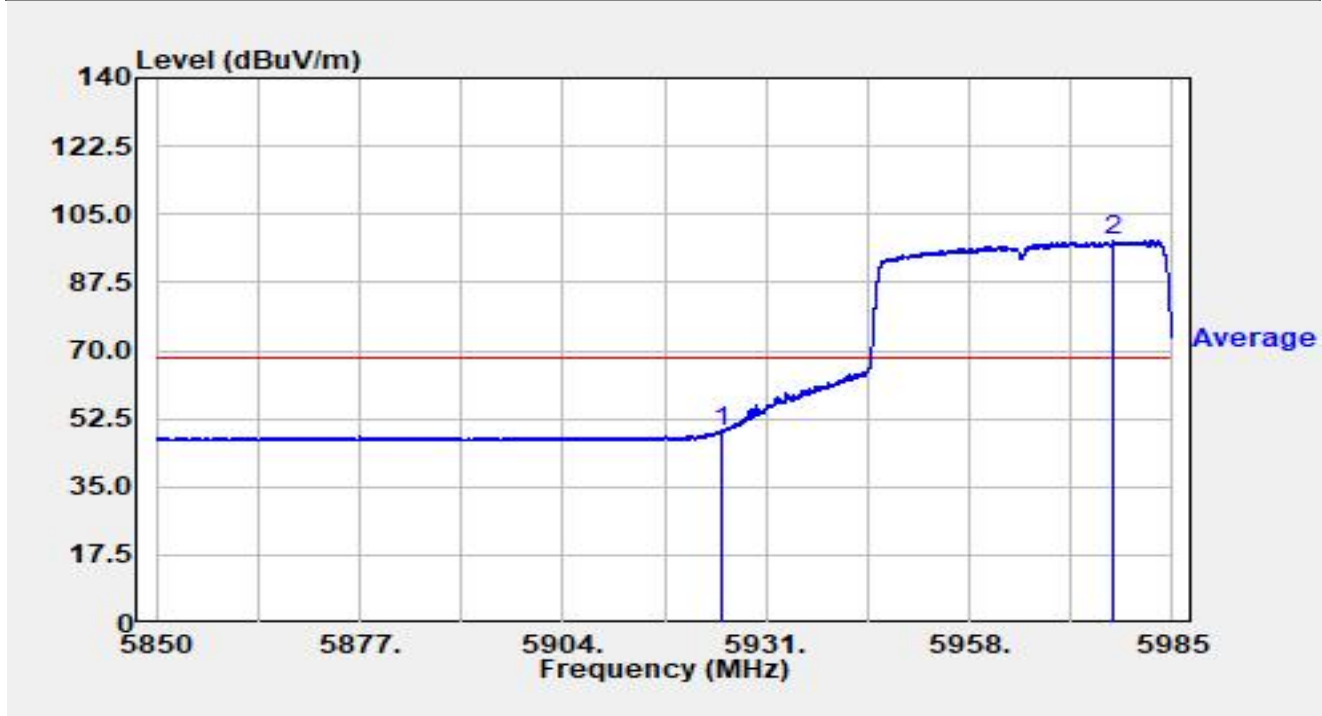


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	28.60	20.60	49.20	-19.00	68.20	Average
2		5977.129	77.75	20.57	98.32	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

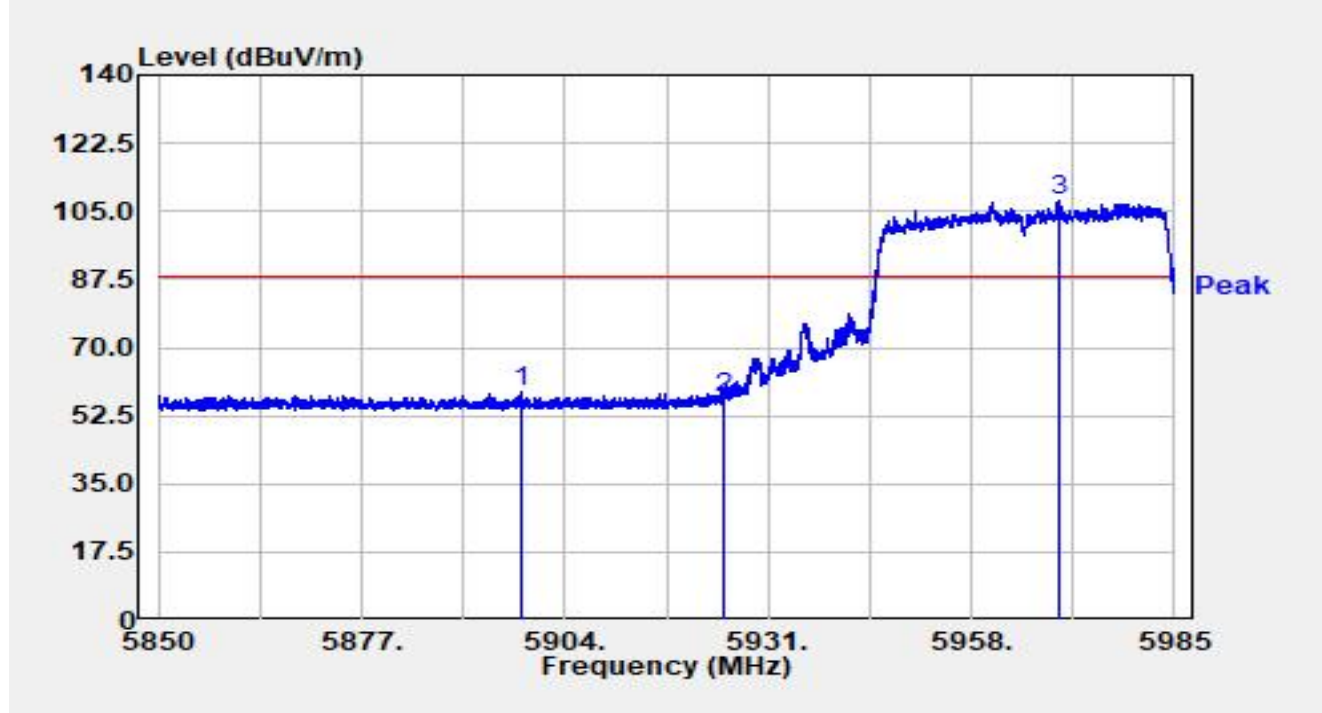


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5898.343	38.10	20.43	58.53	-29.67	88.20	Peak
2		5925.000	36.67	20.60	57.28	-30.92	88.20	Peak
3		5969.597	87.32	20.57	107.88	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5965MHz		

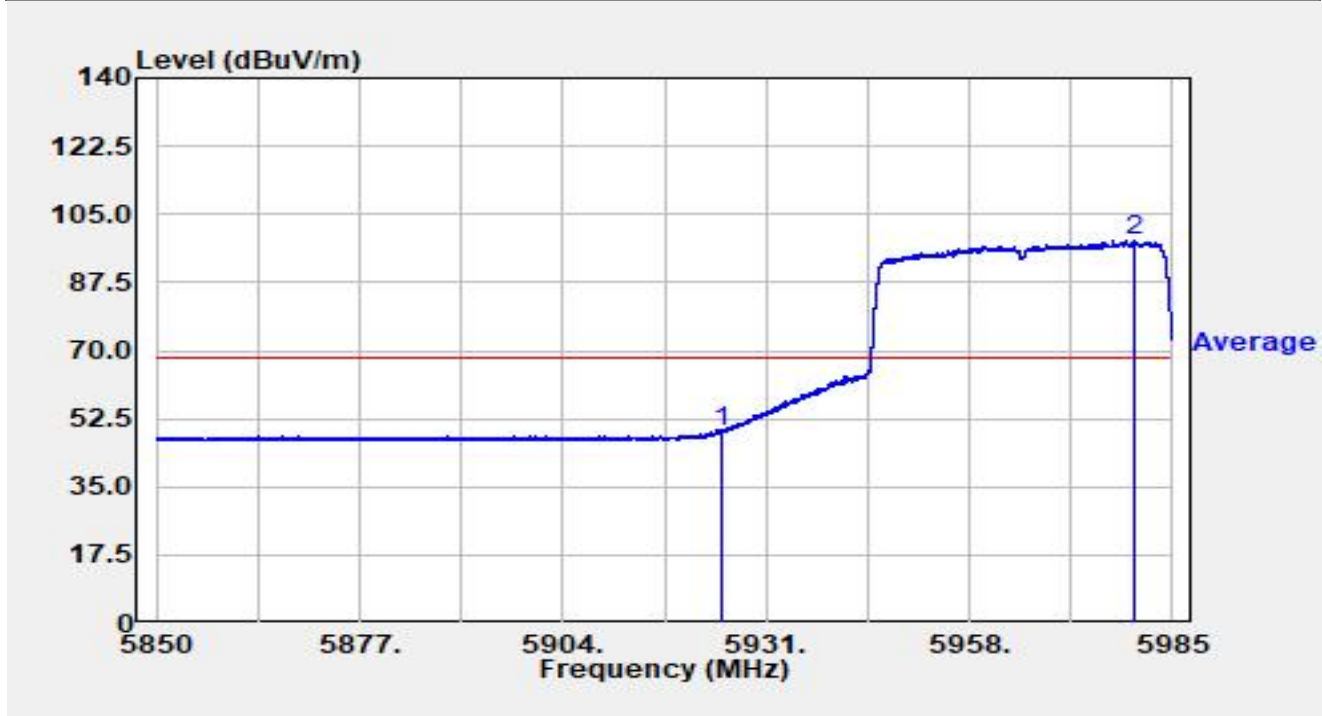


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	28.52	20.60	49.12	-19.08	68.20	Average
2		5980.005	77.85	20.57	98.42	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

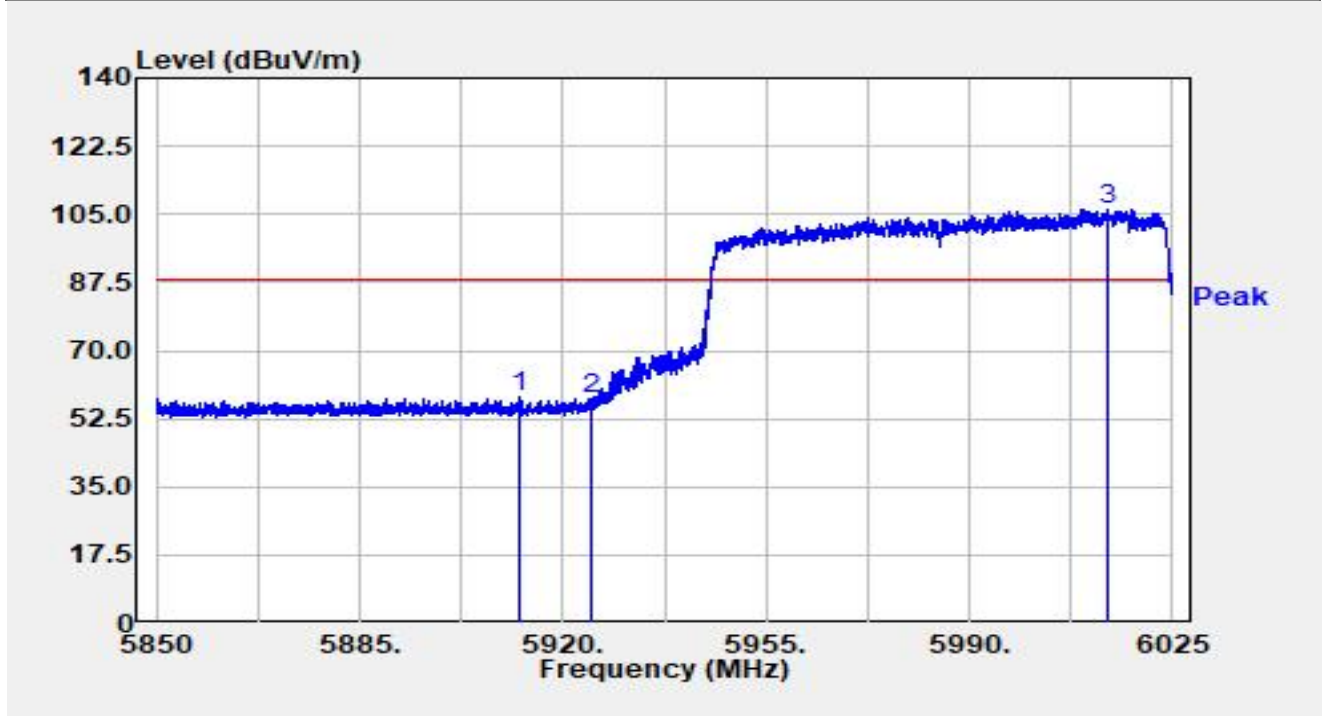


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5912.353	37.43	20.49	57.92	-30.28	88.20	Peak
2		5925.000	36.80	20.60	57.40	-30.80	88.20	Peak
3		6013.678	85.38	20.97	106.35	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

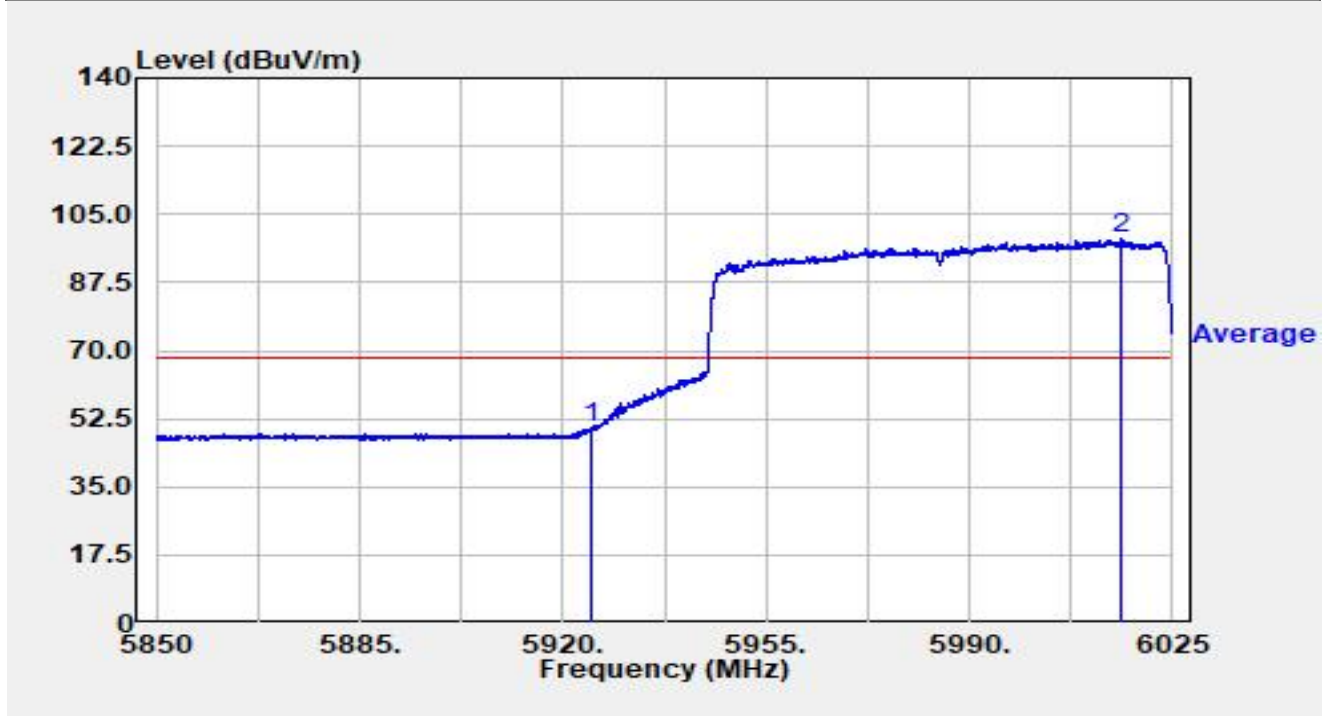


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	29.32	20.60	49.93	-18.27	68.20	Average
2		6016.250	77.86	20.98	98.84	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

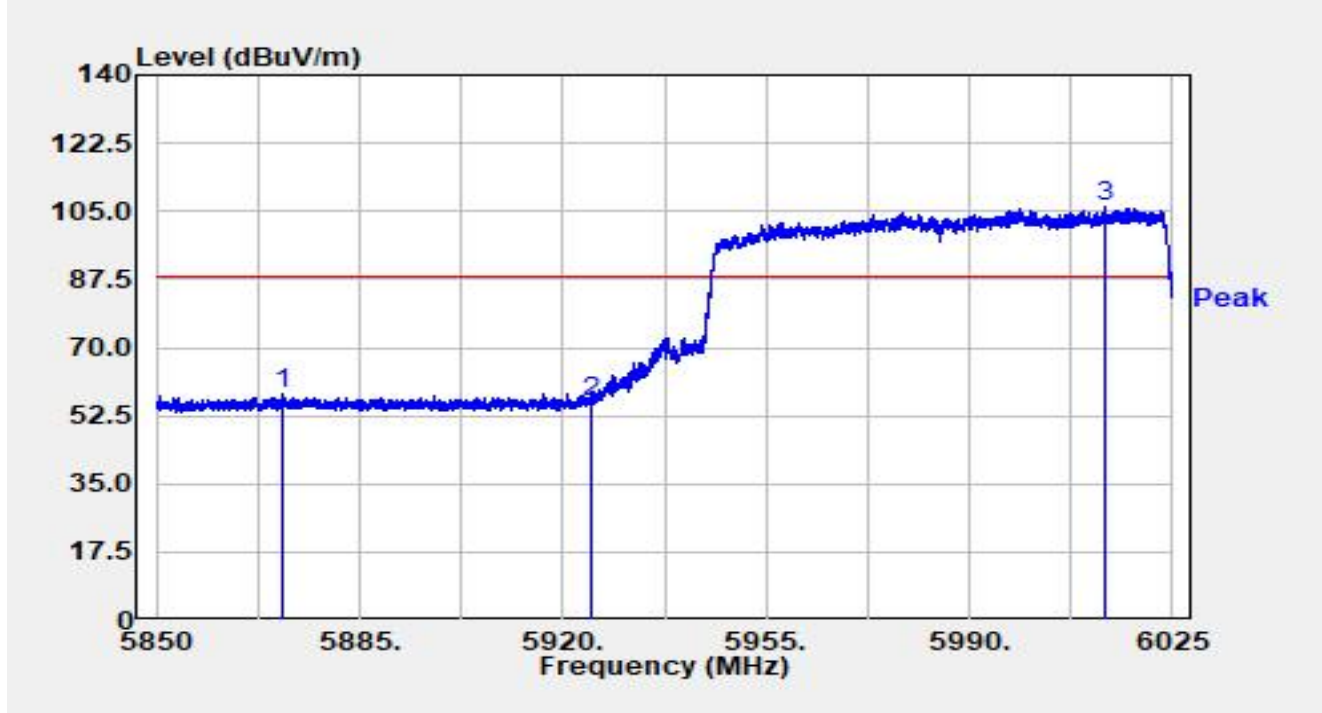


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5871.770	37.37	20.56	57.93	-30.27	88.20	Peak
2		5925.005	35.43	20.60	56.03	-32.17	88.20	Peak
3		6013.502	85.05	20.97	106.02	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5985MHz		

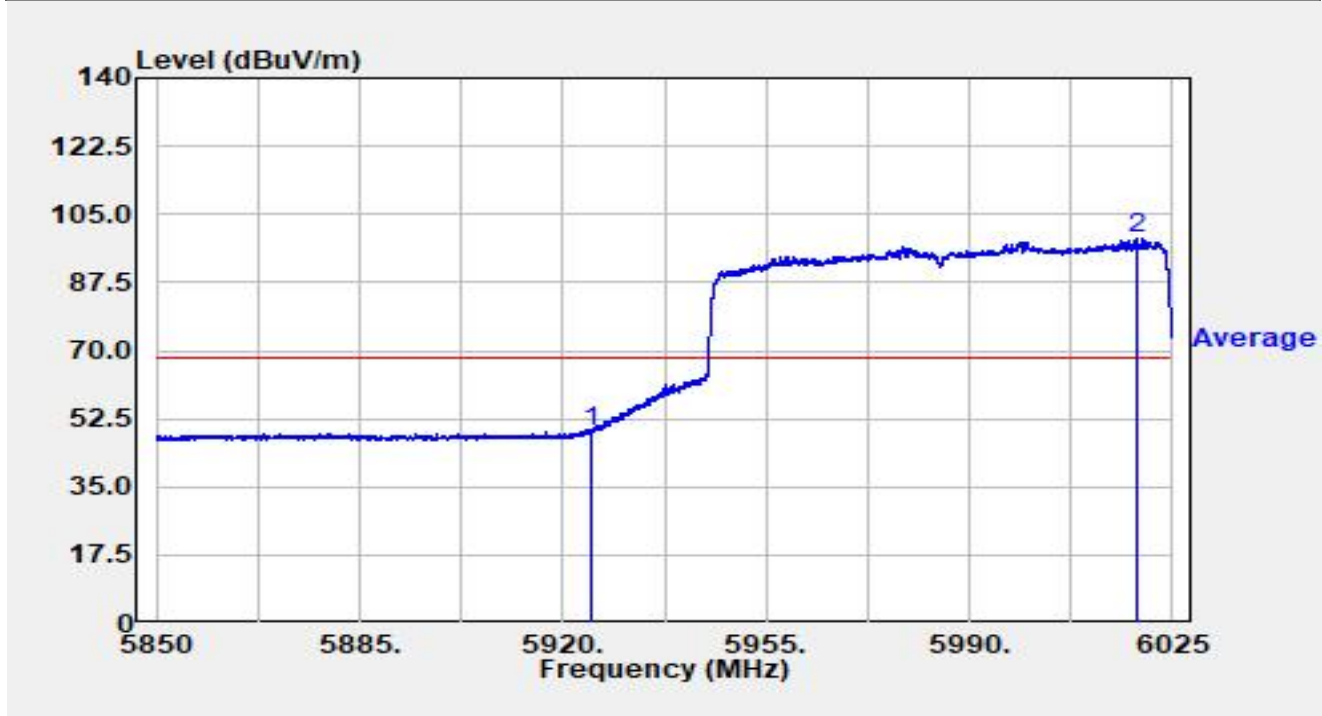


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	28.35	20.60	48.95	-19.25	68.20	Average
2		6018.665	77.81	20.98	98.79	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

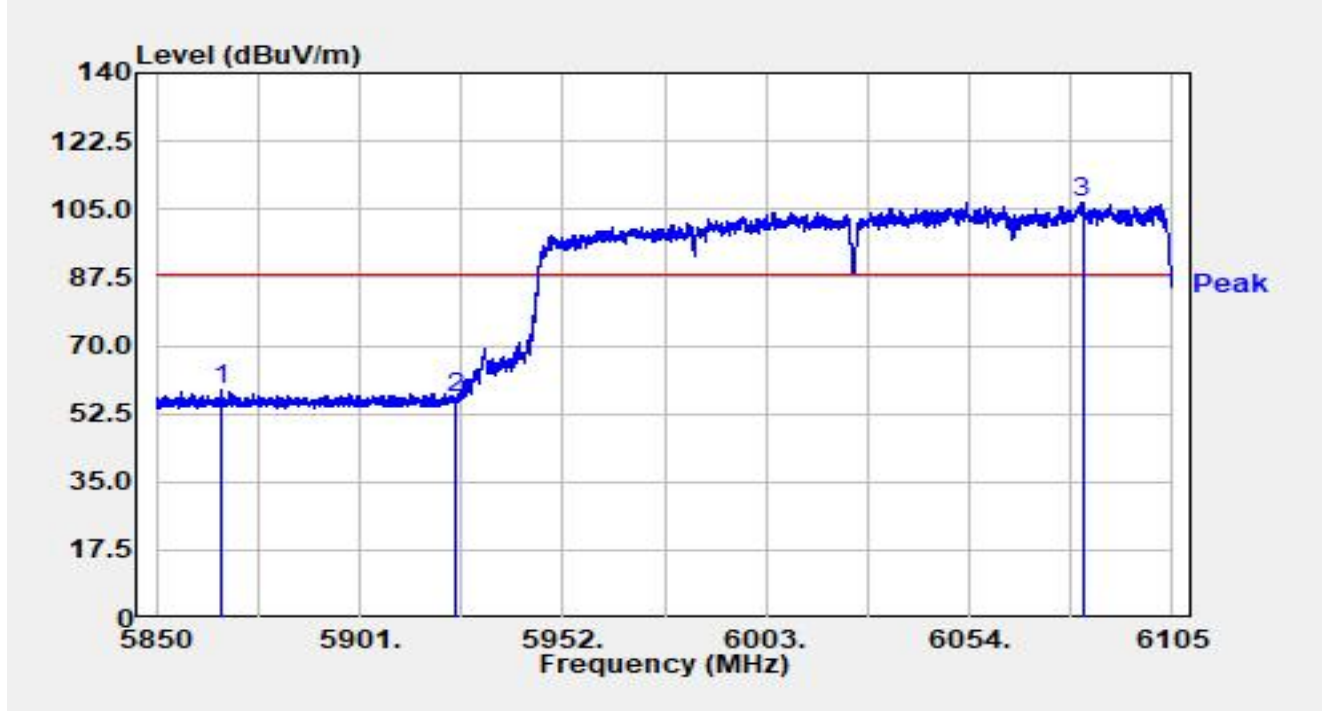


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5866.218	38.06	20.56	58.62	-29.58	88.20	Peak
2		5924.996	36.17	20.60	56.78	-31.42	88.20	Peak
3		6082.381	85.48	21.23	106.71	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

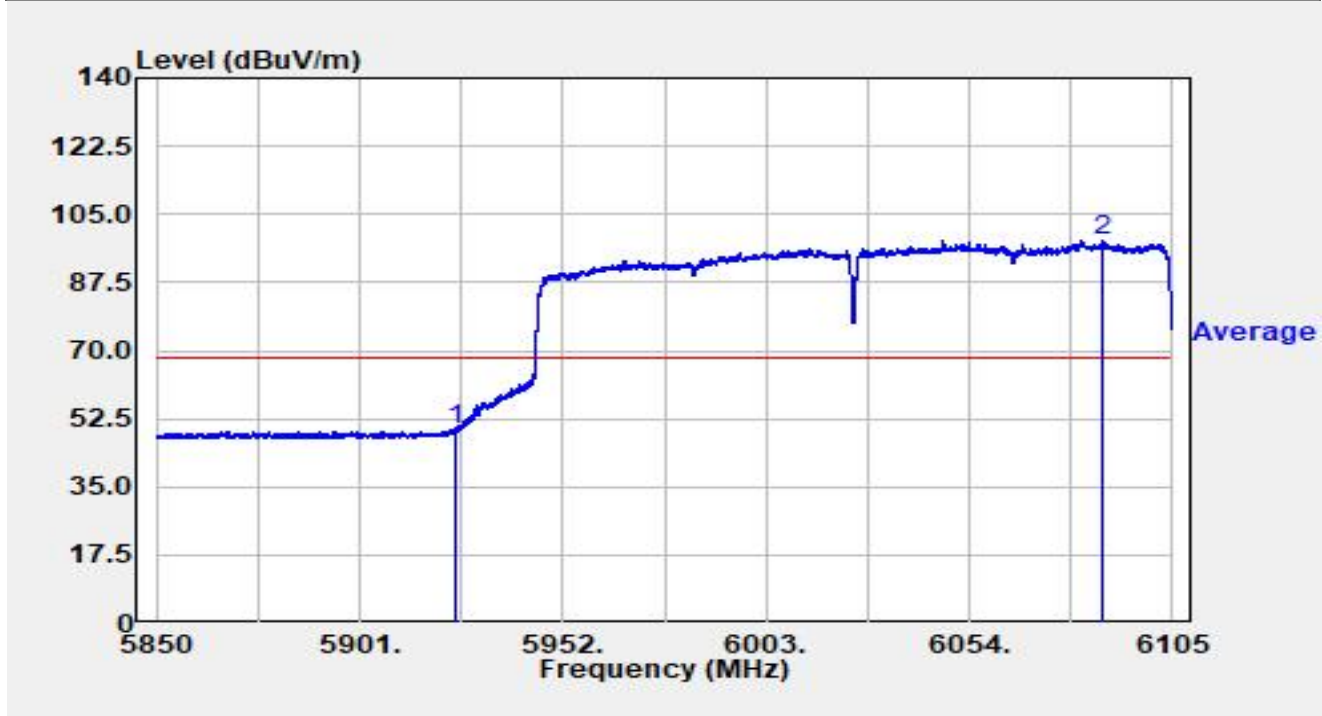


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.996	28.82	20.60	49.43	-18.77	68.20	Average
2		6087.431	77.05	21.34	98.39	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

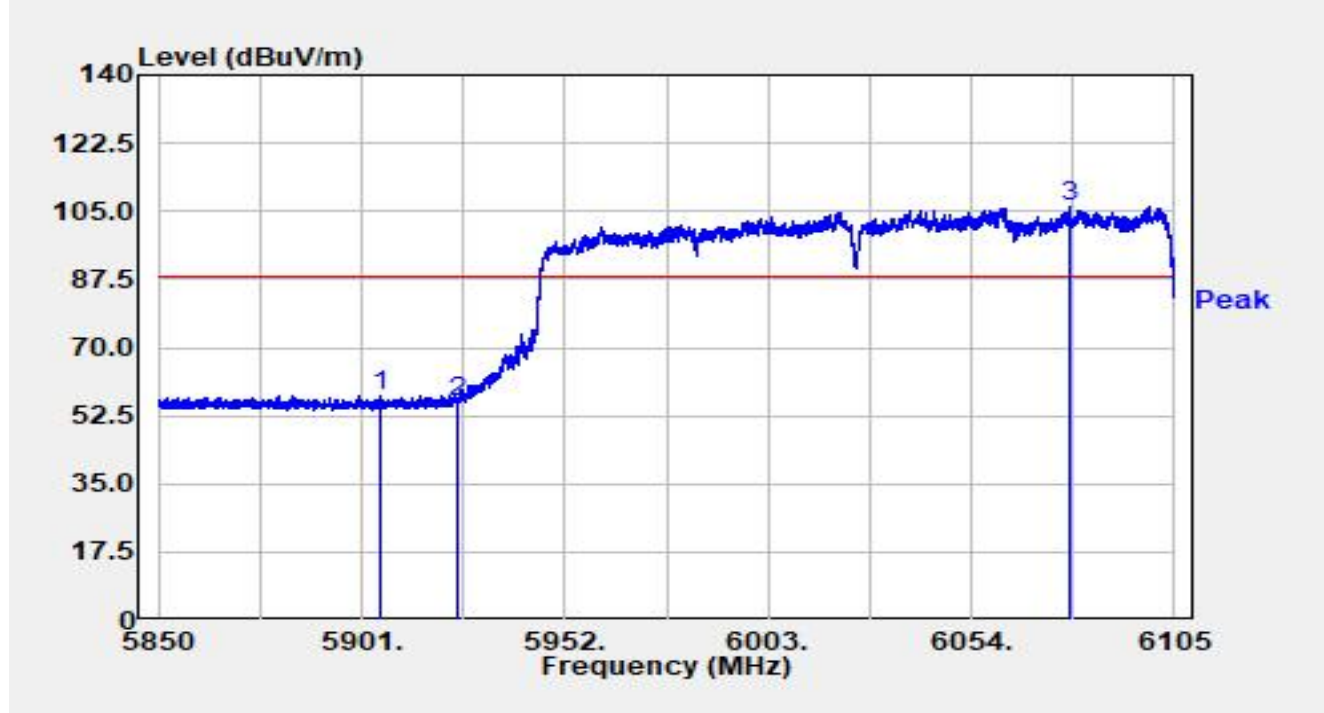


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5905.896	37.07	20.46	57.53	-30.67	88.20	Peak
2		5924.996	35.56	20.60	56.17	-32.03	88.20	Peak
3		6078.684	84.97	21.16	106.13	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6025MHz		

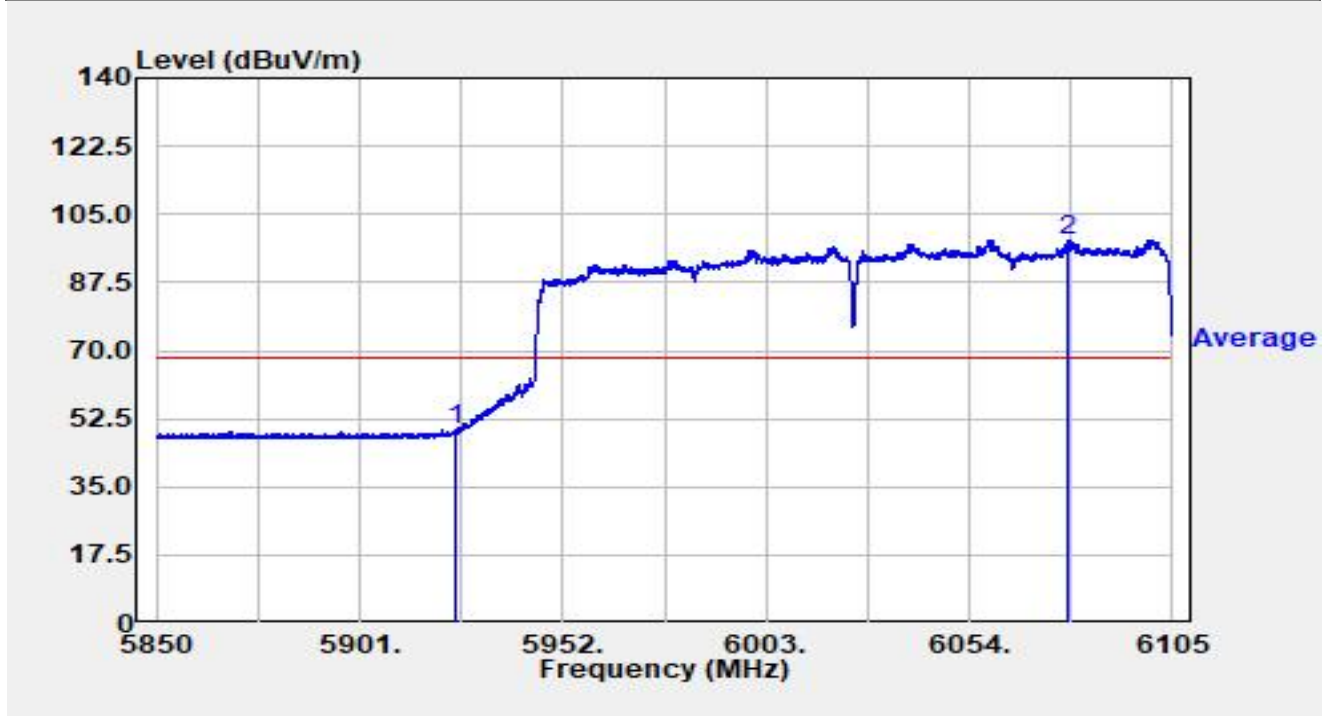


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5924.996	29.13	20.60	49.74	-18.46	68.20	Average
2		6078.786	77.22	21.16	98.38	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

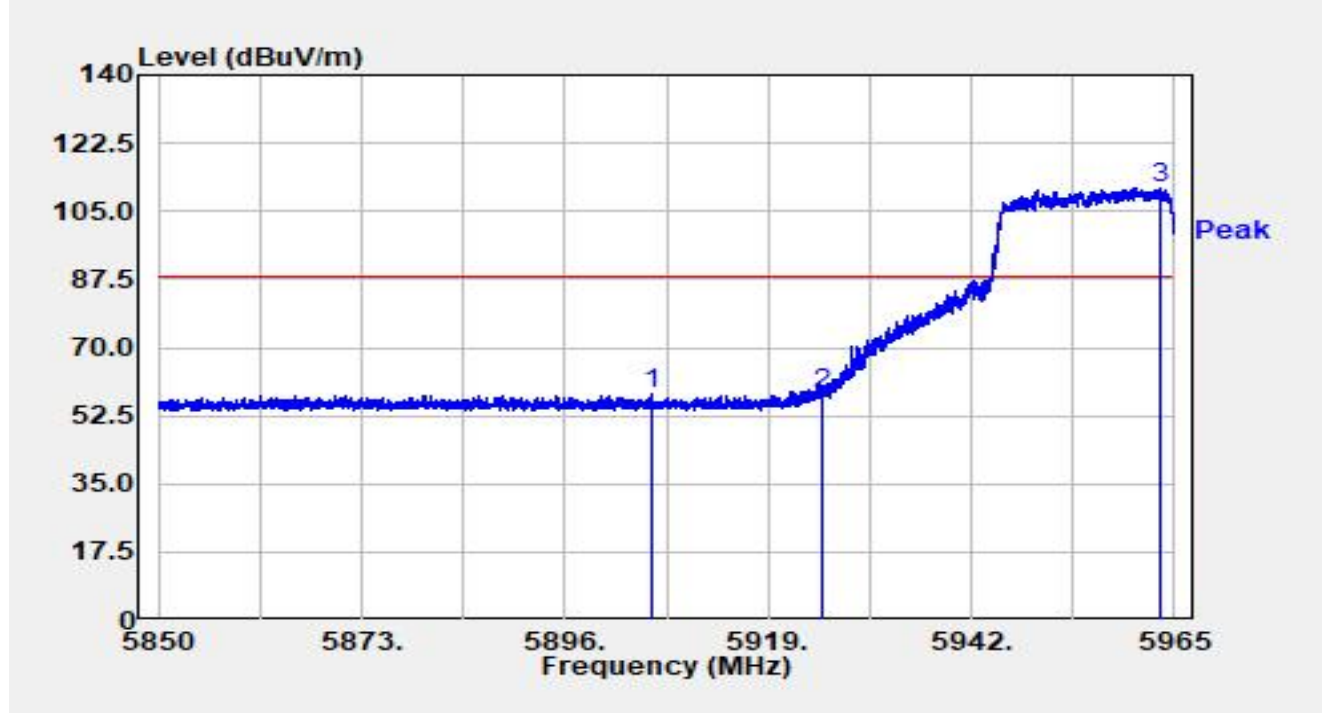


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5905.775	37.47	20.46	57.93	-30.27	88.20	Peak
2	*	5925.003	37.50	20.60	58.11	-30.09	88.20	Peak
3		5963.252	90.35	20.57	110.92	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

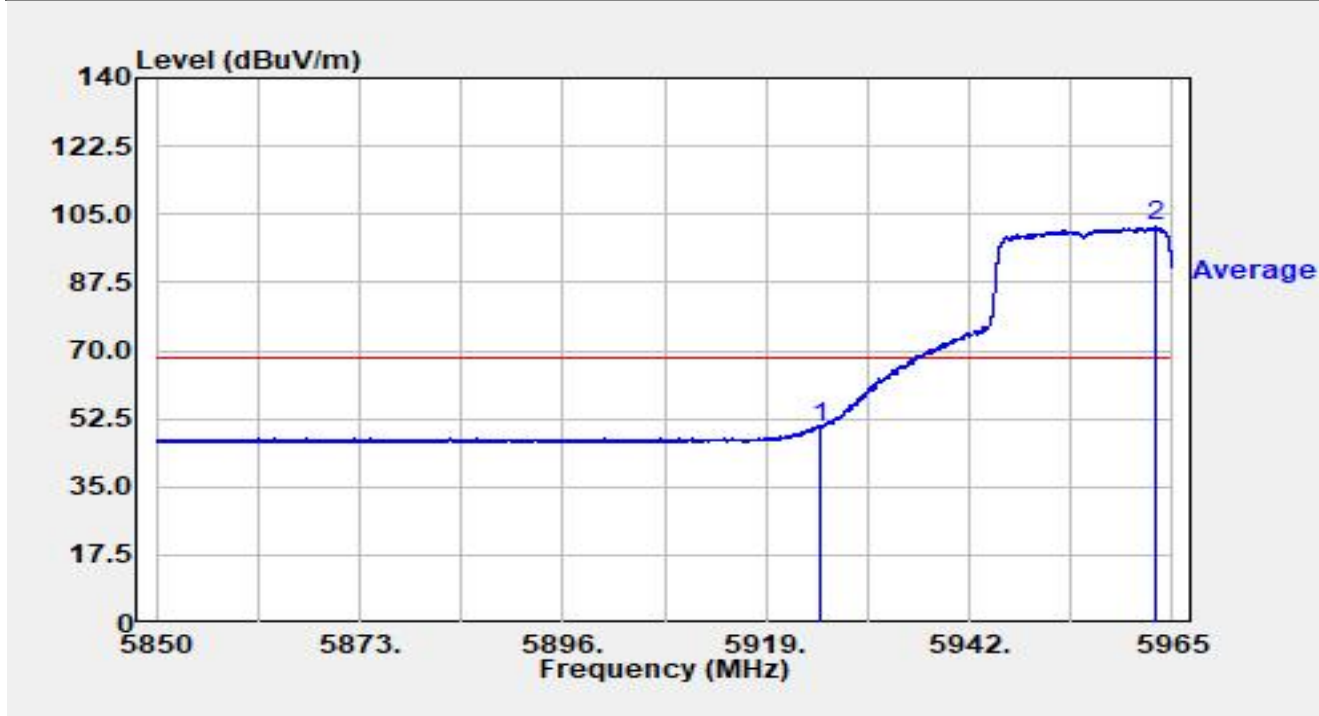


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5925.003	29.72	20.60	50.33	-17.87	68.20	Average
2		5963.217	81.13	20.57	101.70	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

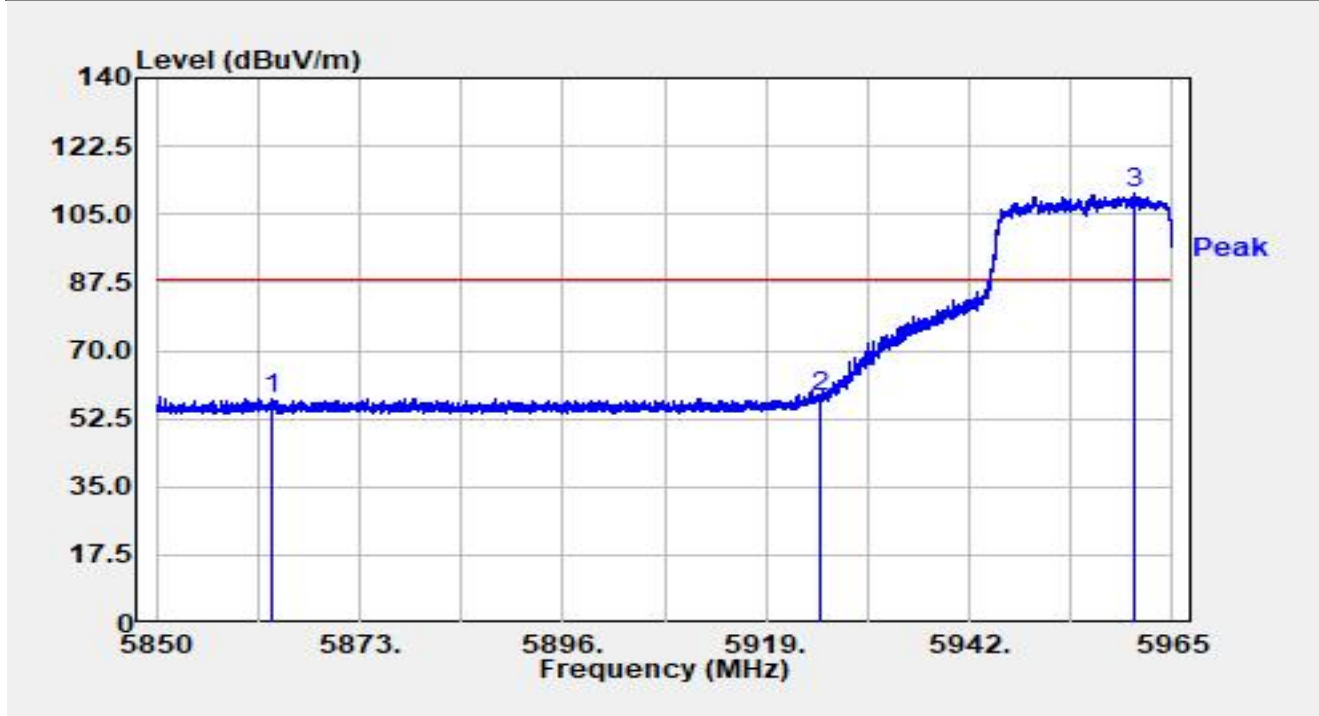


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5863.041	37.10	20.55	57.65	-30.55	88.20	Peak
2	*	5925.000	37.61	20.60	58.21	-29.99	88.20	Peak
3		5960.665	89.93	20.57	110.49	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

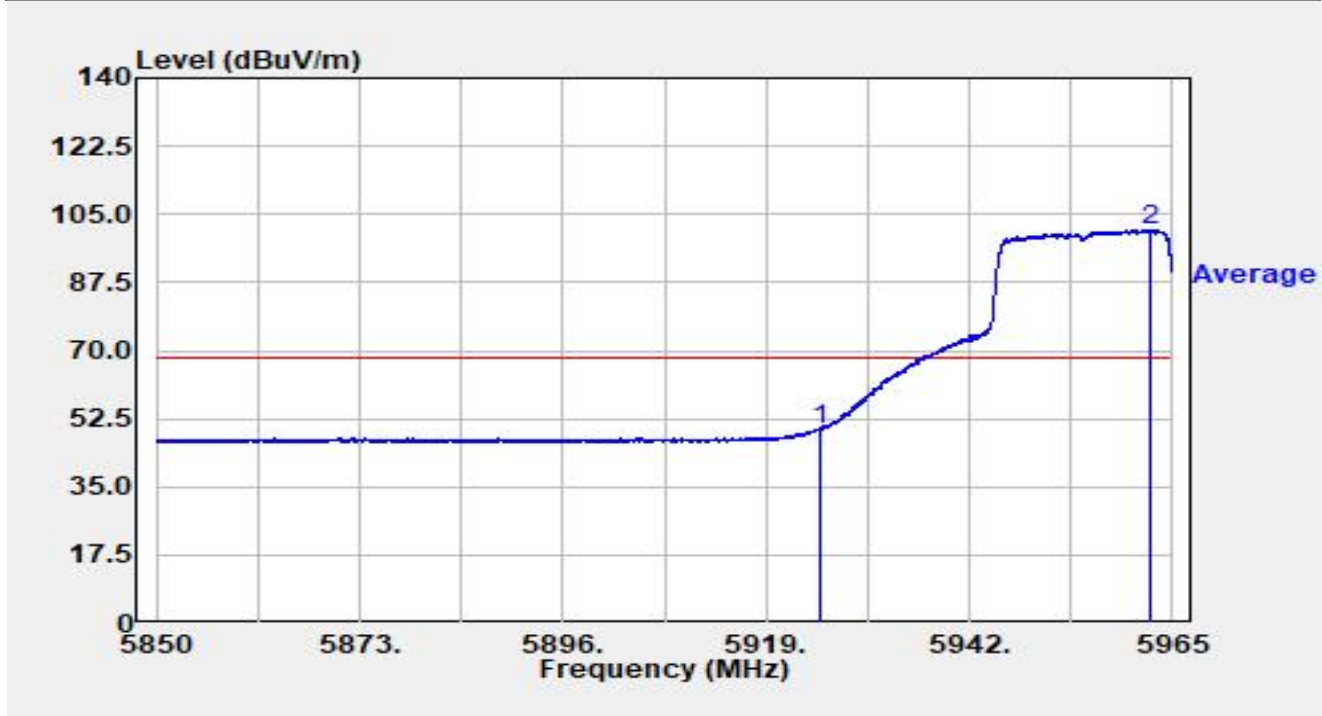


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.003	29.12	20.60	49.72	-18.48	68.20	Average
2		5962.401	80.51	20.57	101.08	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

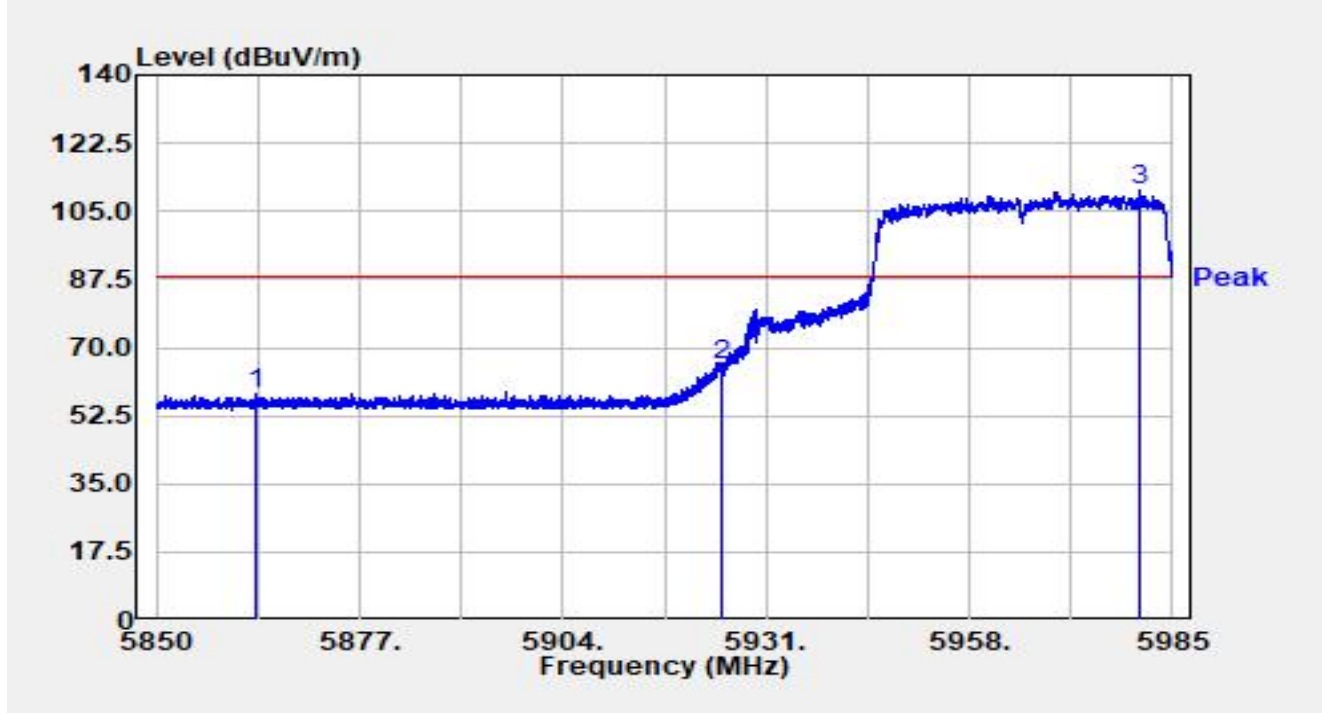


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5863.136	37.57	20.55	58.12	-30.08	88.20	Peak
2	*	5925.006	44.80	20.60	65.40	-22.80	88.20	Peak
3		5980.667	90.09	20.57	110.66	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

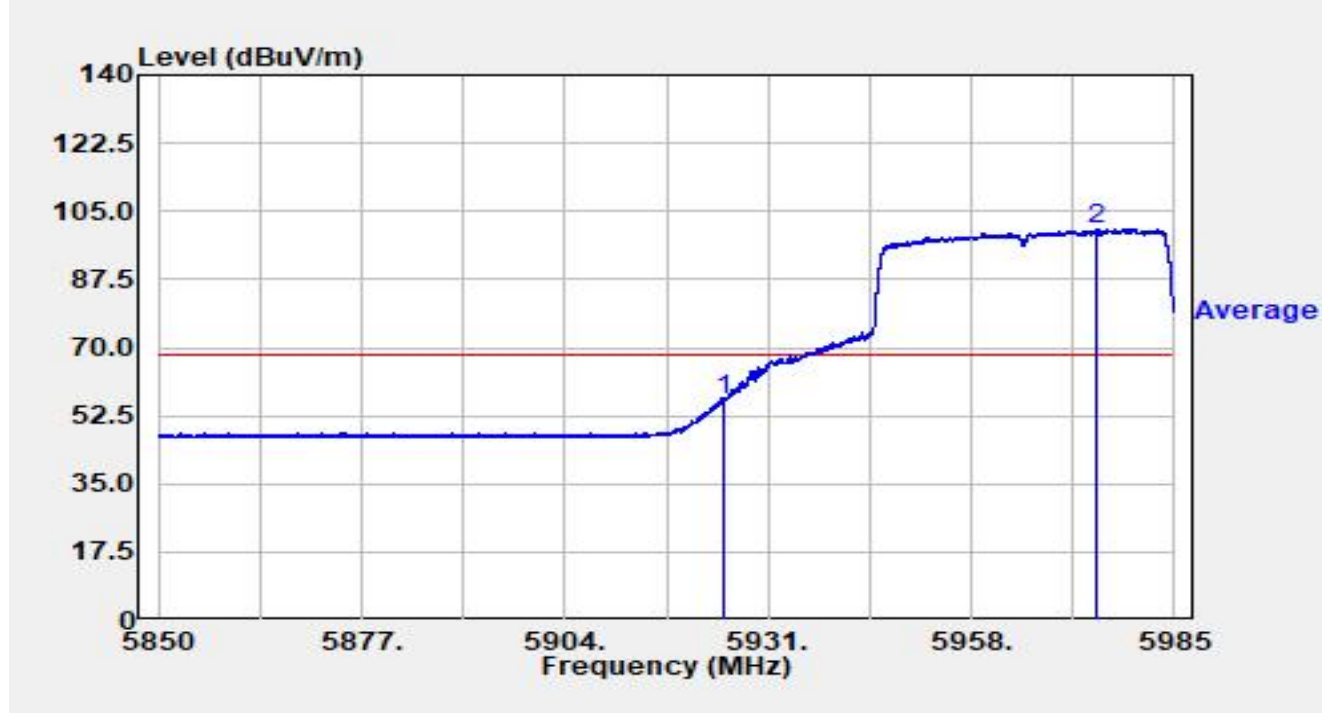


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	35.94	20.60	56.54	-11.66	68.20	Average
2		5974.753	79.82	20.57	100.39	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

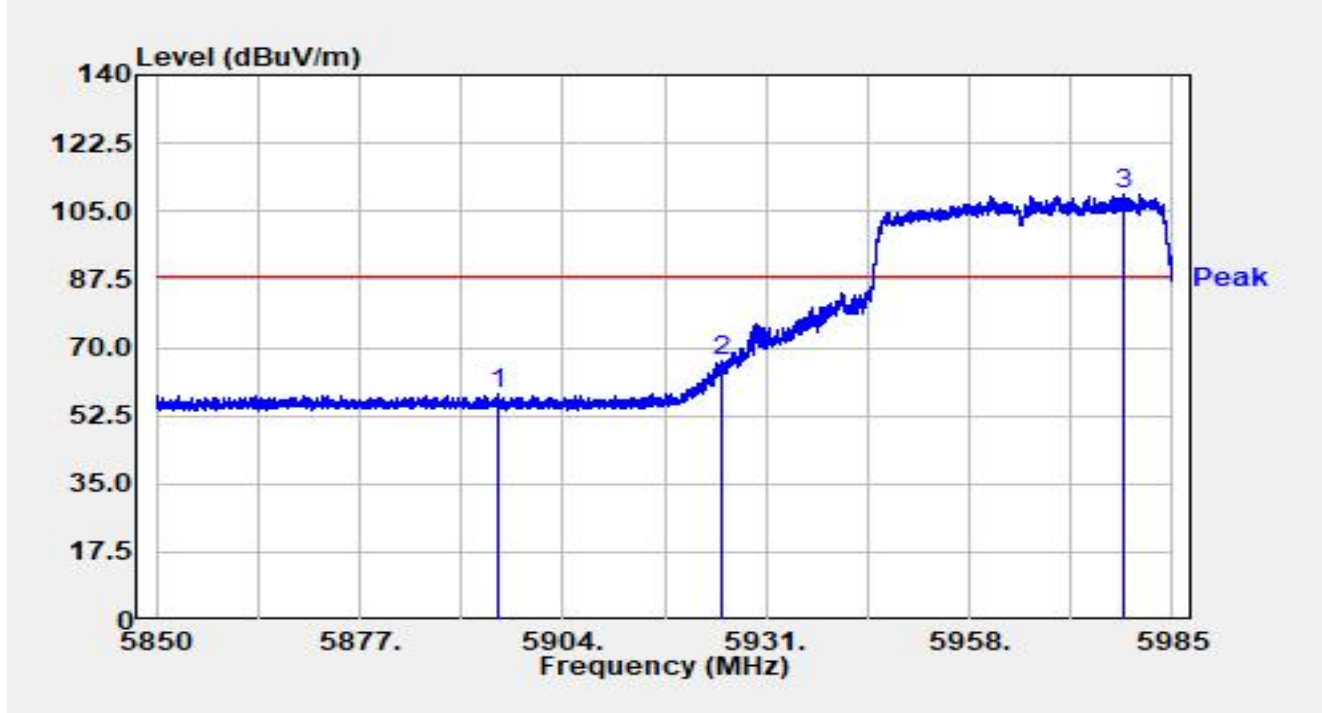


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5895.266	37.53	20.42	57.95	-30.25	88.20	Peak
2	*	5925.006	45.73	20.60	66.33	-21.87	88.20	Peak
3		5978.628	88.61	20.57	109.18	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5965MHz		

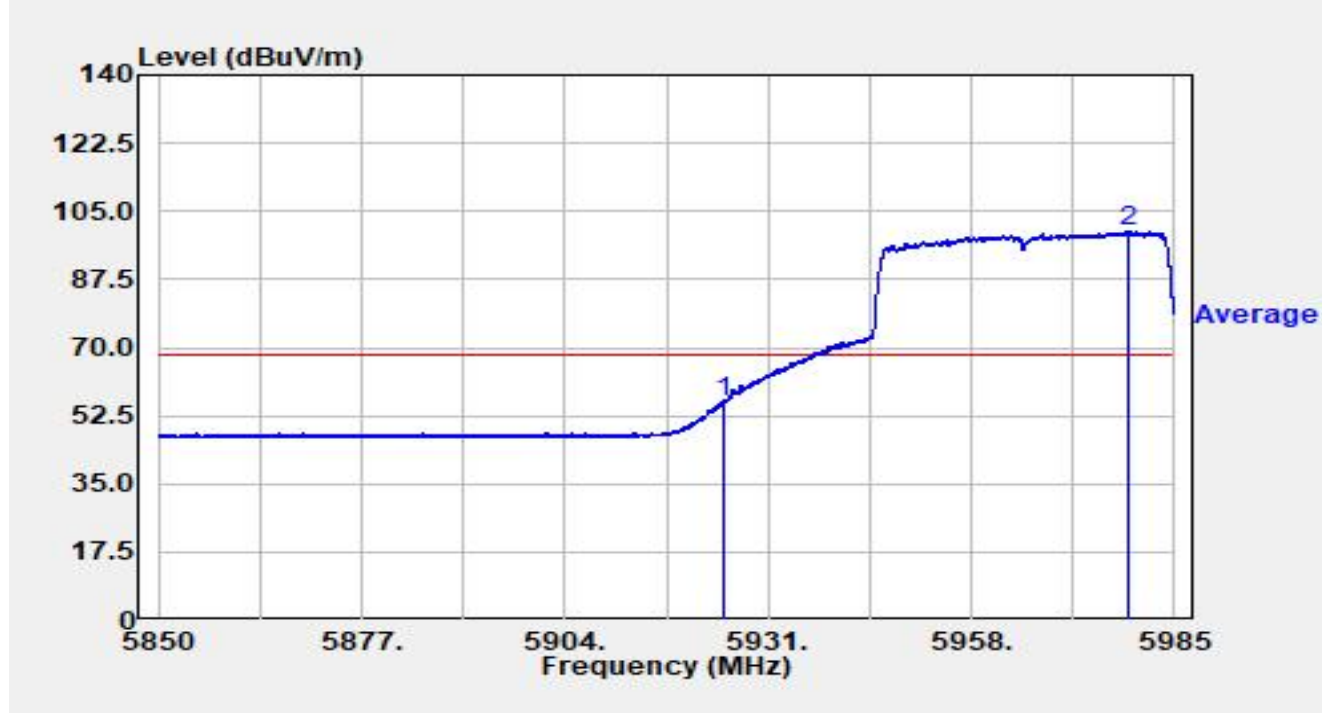


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.006	35.56	20.60	56.16	-12.04	68.20	Average
2		5978.831	79.35	20.57	99.92	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

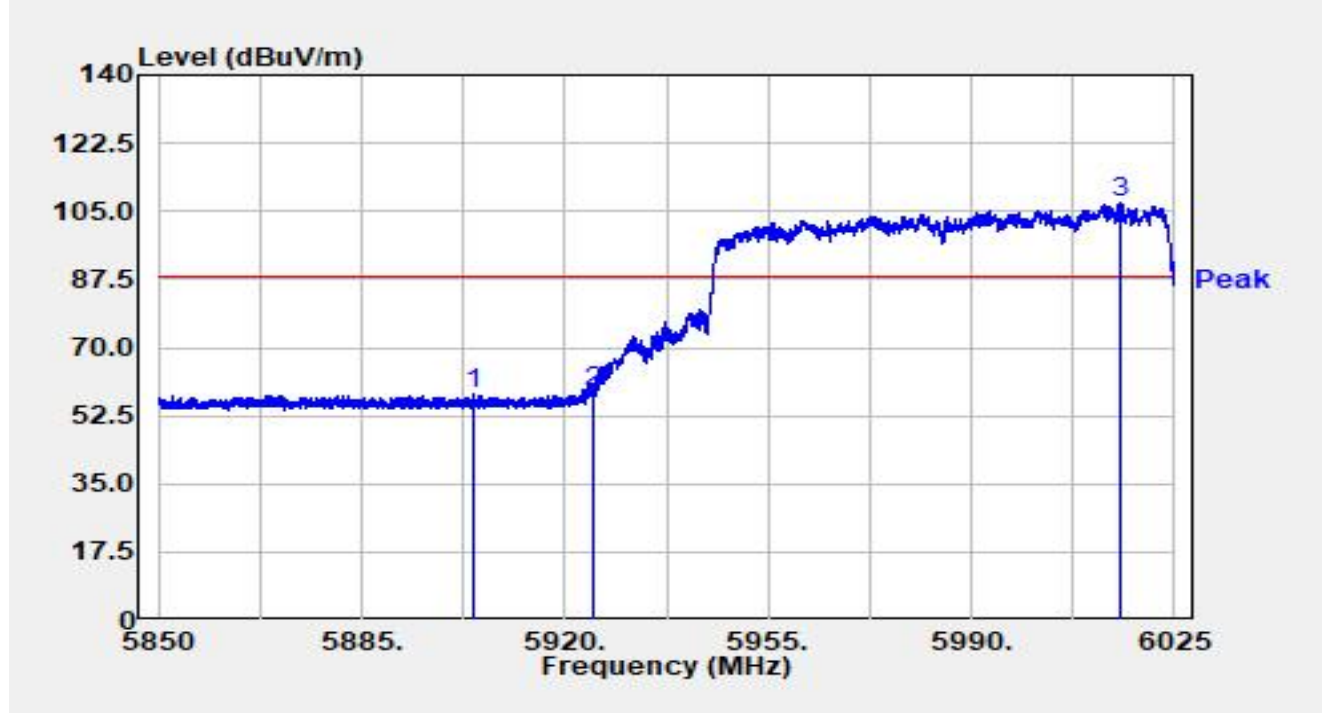


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5904.408	37.47	20.45	57.92	-30.28	88.20	Peak
2	*	5925.005	38.08	20.60	58.68	-29.52	88.20	Peak
3		6015.690	86.40	20.98	107.38	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

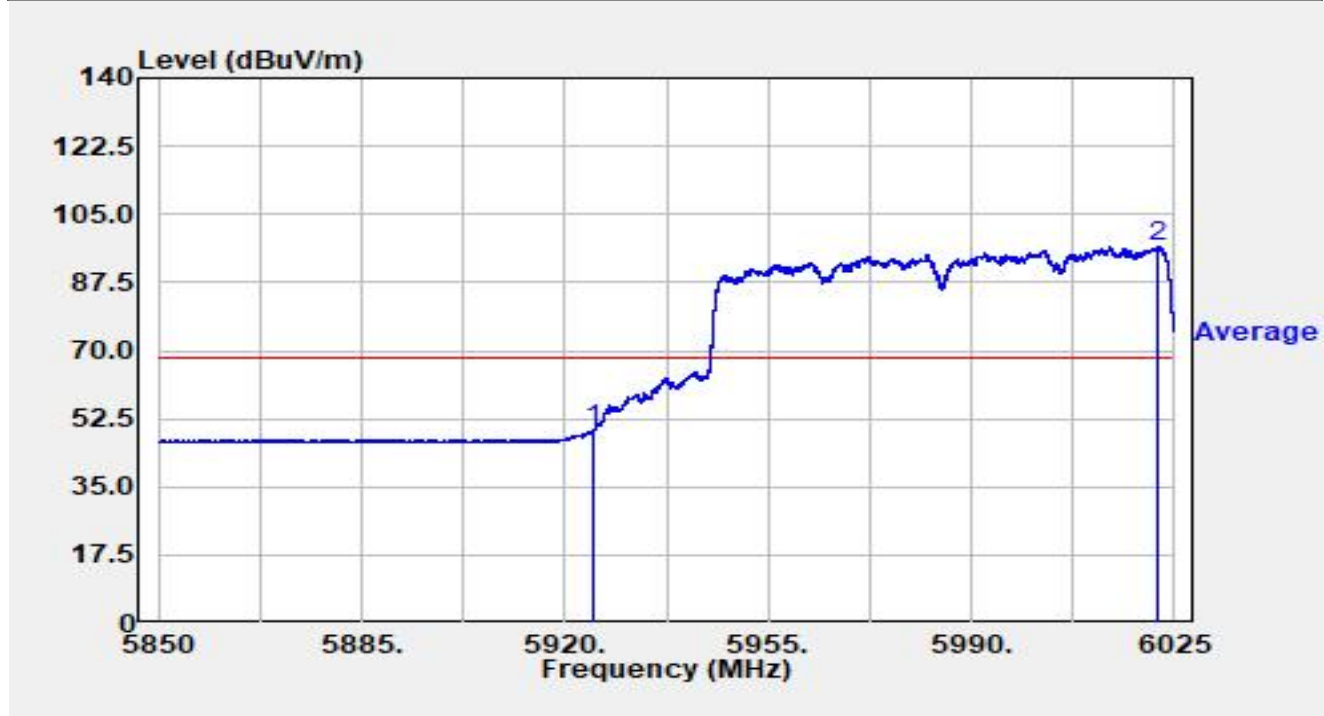


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.005	29.08	20.60	49.68	-18.52	68.20	Average
2		6022.270	75.58	20.97	96.56	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

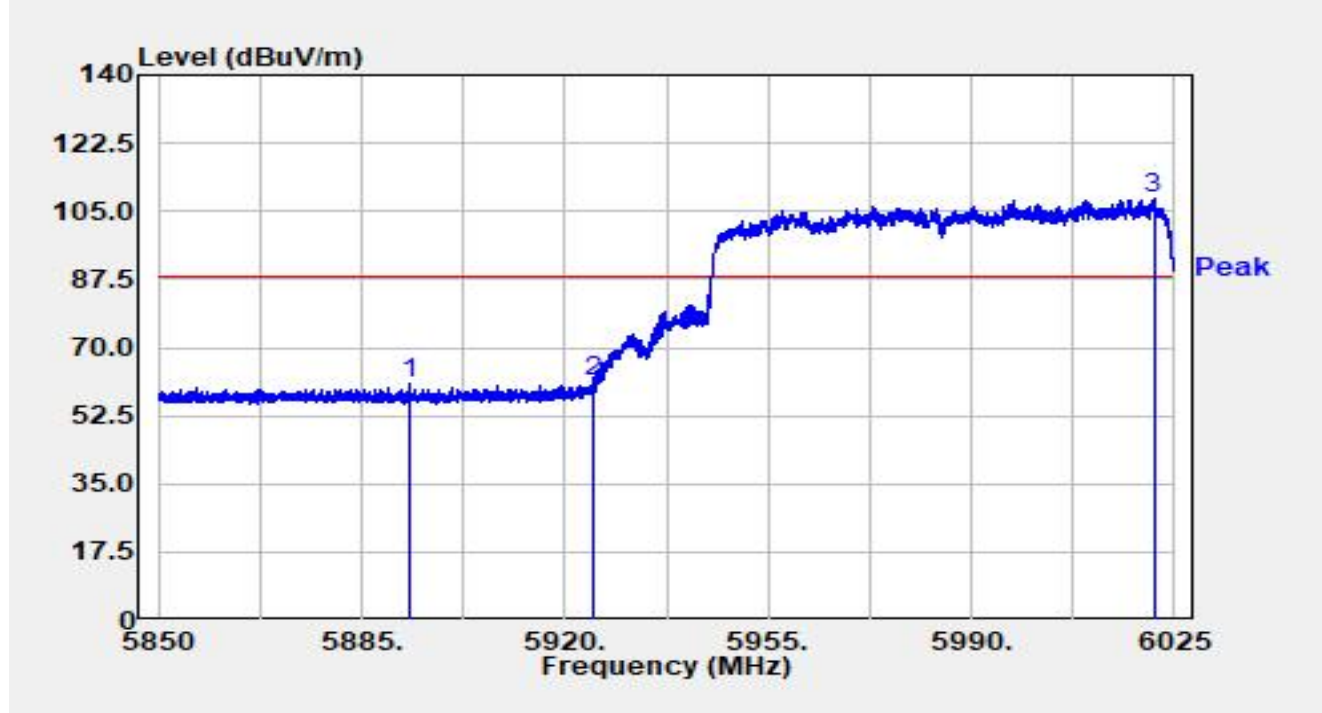


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5893.382	40.18	20.43	60.60	-27.60	88.20	Peak
2	*	5925.005	40.93	20.60	61.54	-26.66	88.20	Peak
3		6021.413	87.08	20.97	108.06	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5985MHz		

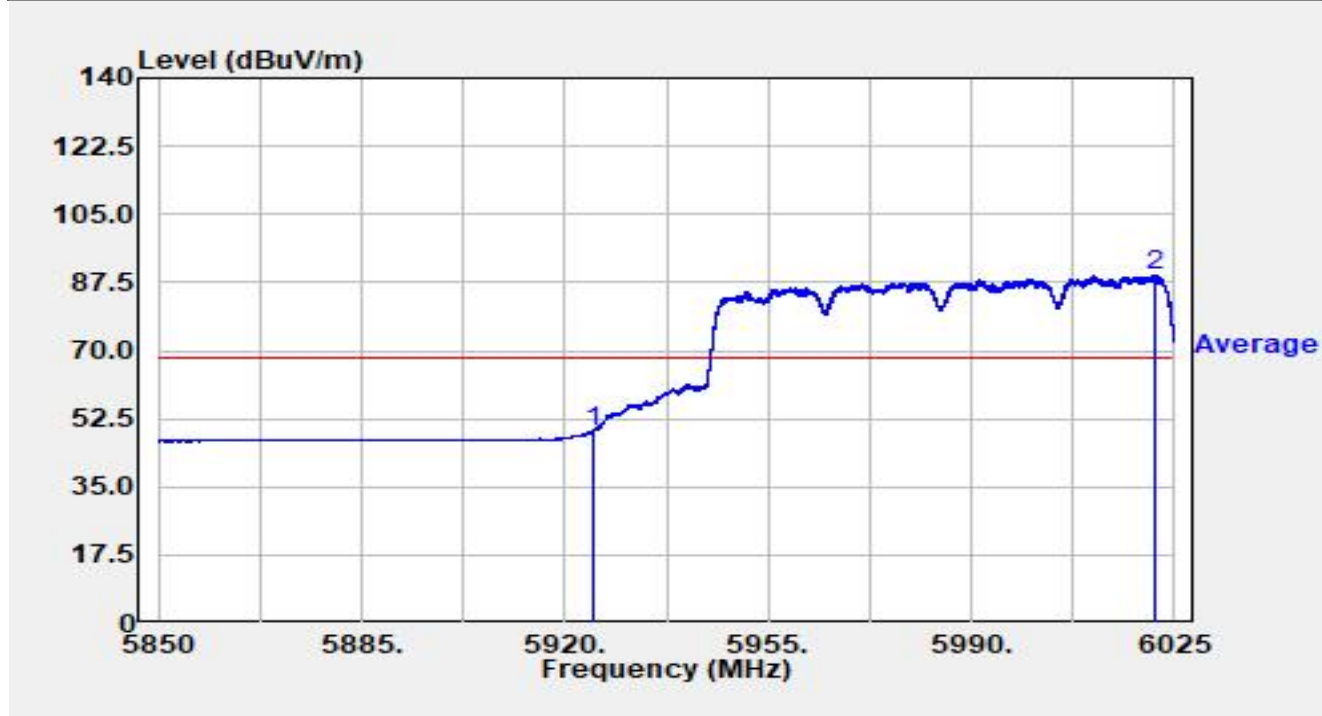


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.005	28.74	20.60	49.35	-18.85	68.20	Average
2		6021.623	68.50	20.97	89.47	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

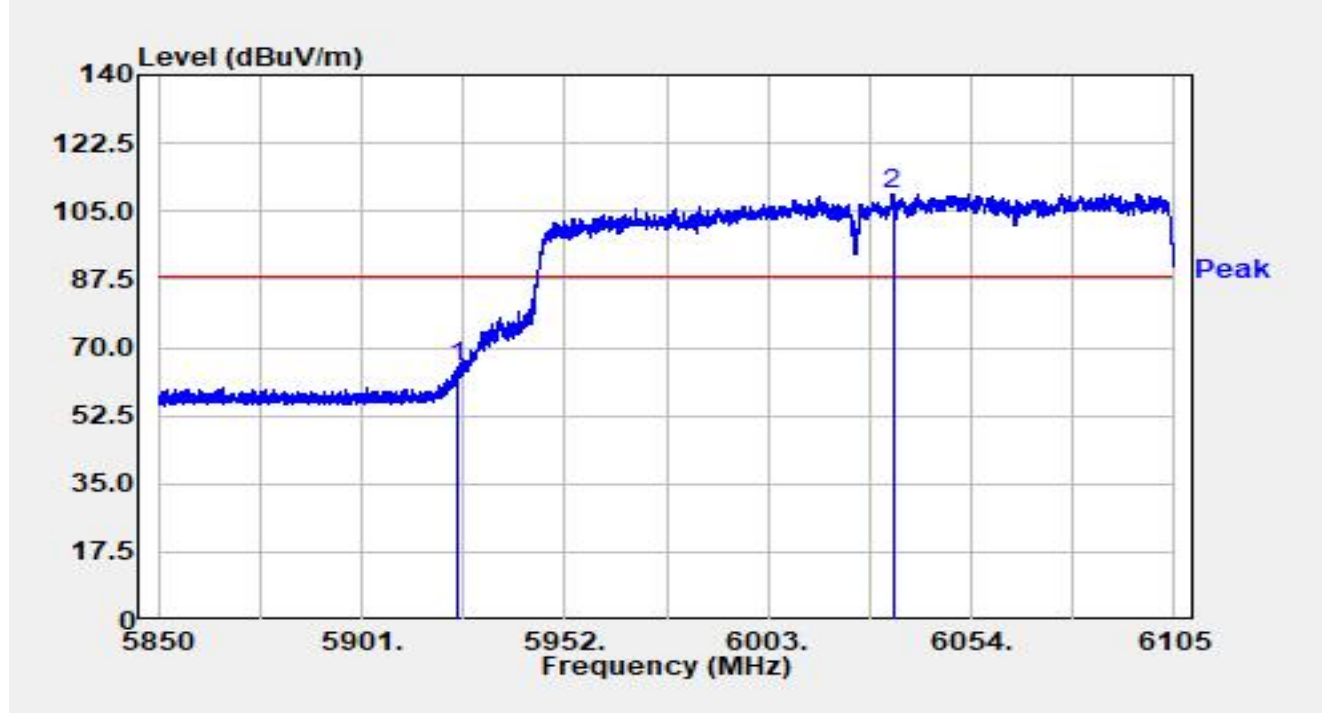


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	44.18	20.60	64.78	-23.42	88.20	Peak
2		6034.289	88.31	20.95	109.26	N/A	N/A	Peak

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

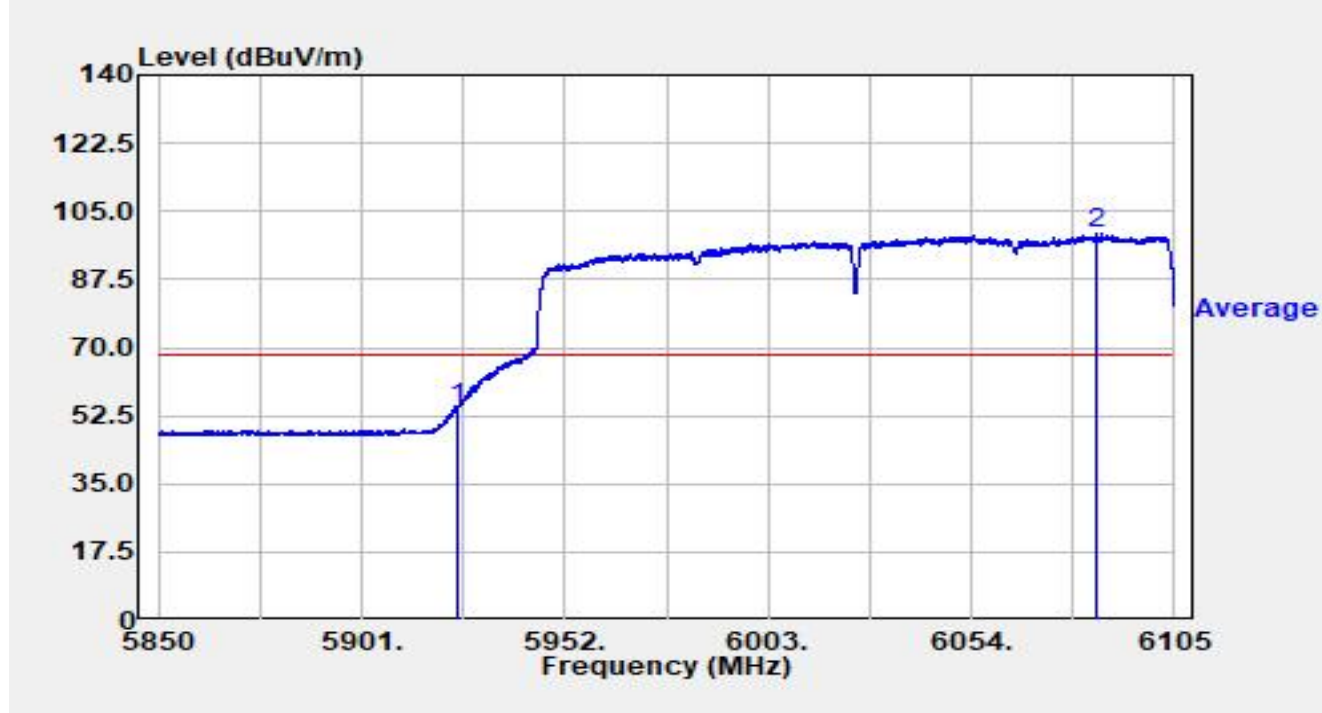


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	33.55	20.60	54.15	-14.05	68.20	Average
2		6085.569	77.86	21.30	99.16	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

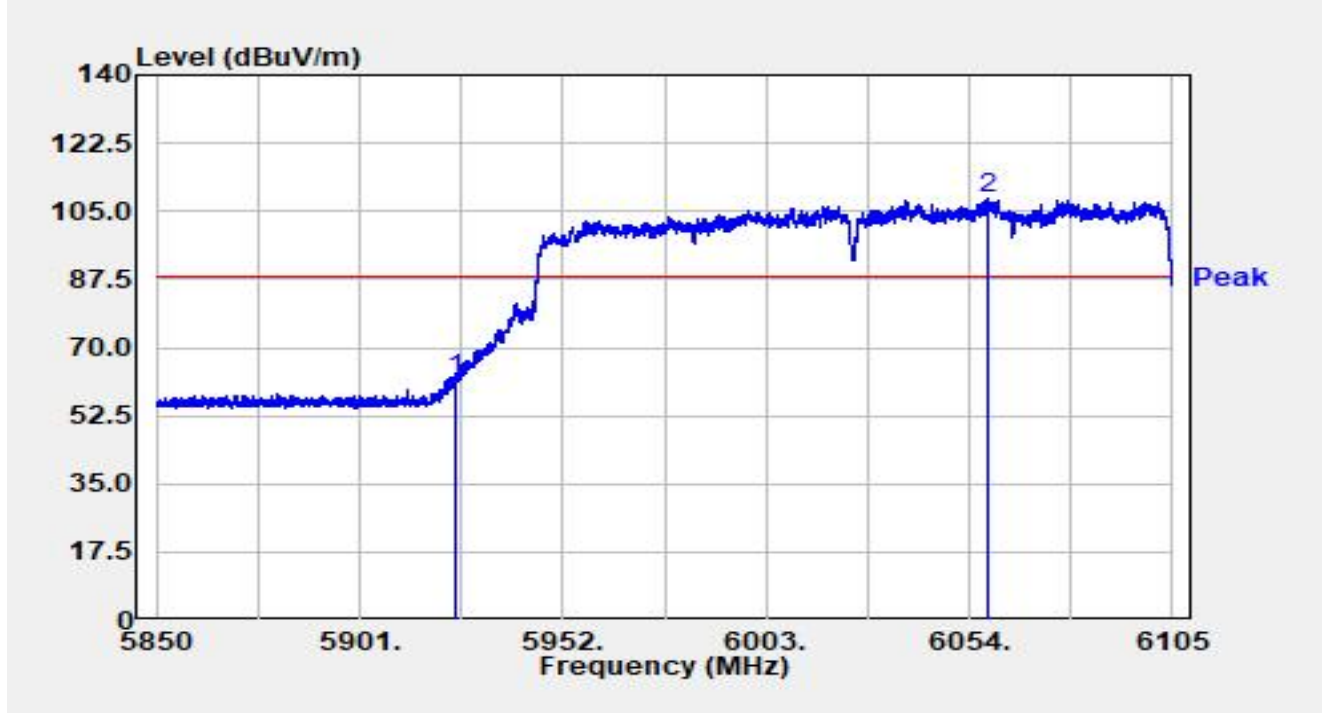


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	41.36	20.60	61.96	-26.24	88.20	Peak
2		6058.743	87.59	20.91	108.50	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-09-25
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6025MHz		

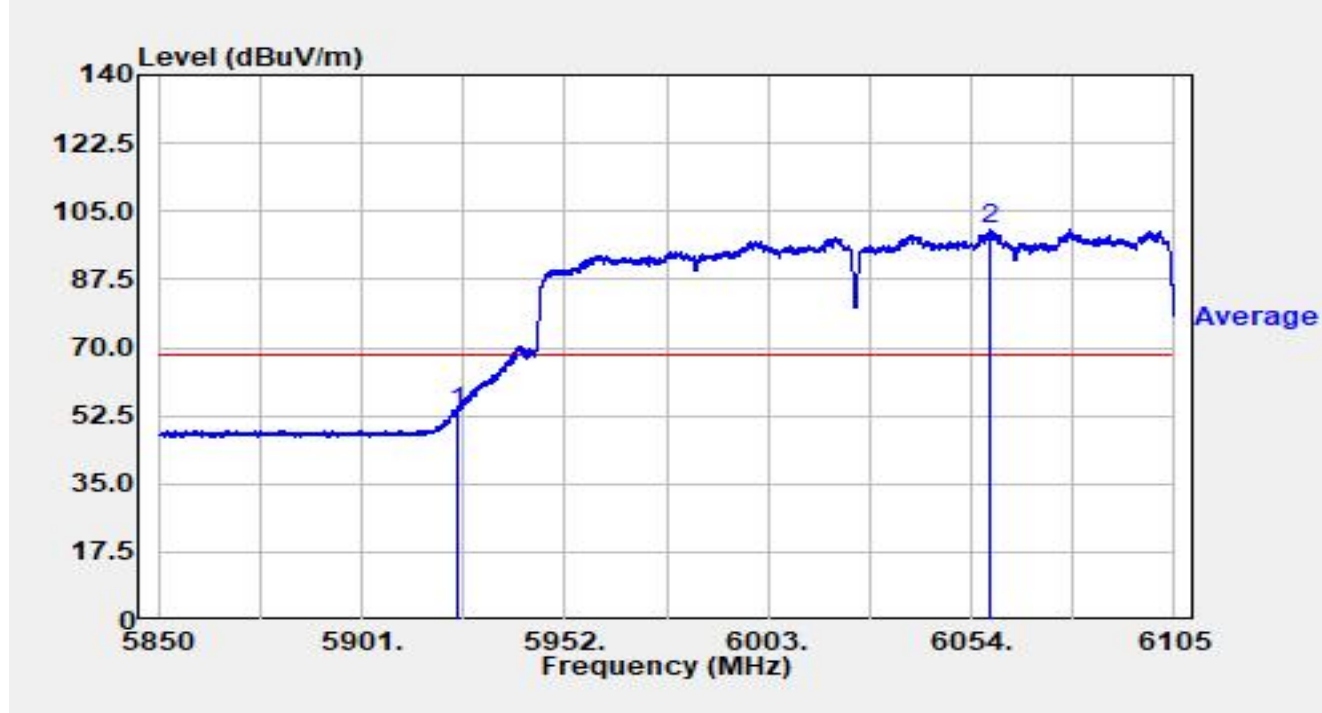


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	32.73	20.60	53.34	-14.86	68.20	Average
2		6058.514	79.36	20.91	100.27	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-10-10
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320M at 6105MHz		

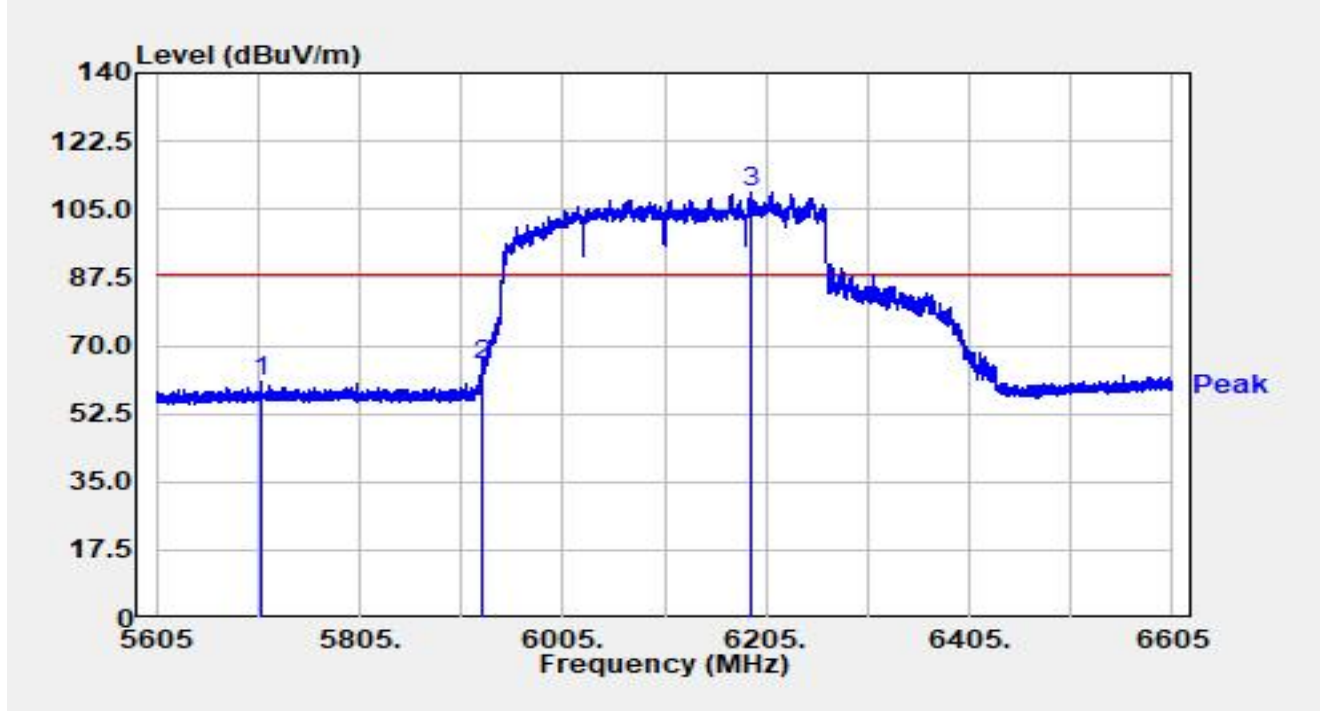


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5708.500	40.82	20.19	61.01	-27.19	88.20	Peak
2	*	5925.000	44.12	20.69	64.81	-23.39	88.20	Peak
3		6190.700	87.32	22.00	109.33	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-10-10
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320M at 6105MHz		

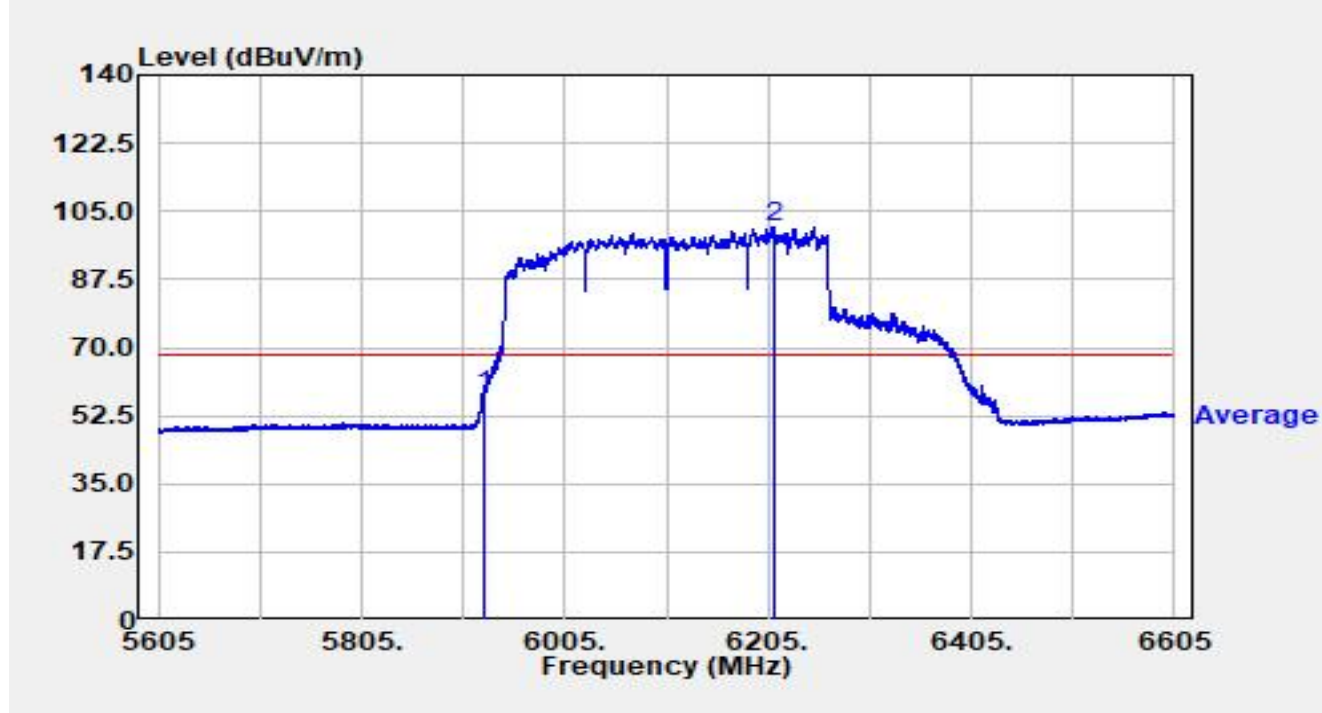


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	36.83	20.69	57.52	-10.68	68.20	Average
2		6211.200	78.89	22.02	100.92	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-10-10
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320M at 6105MHz		

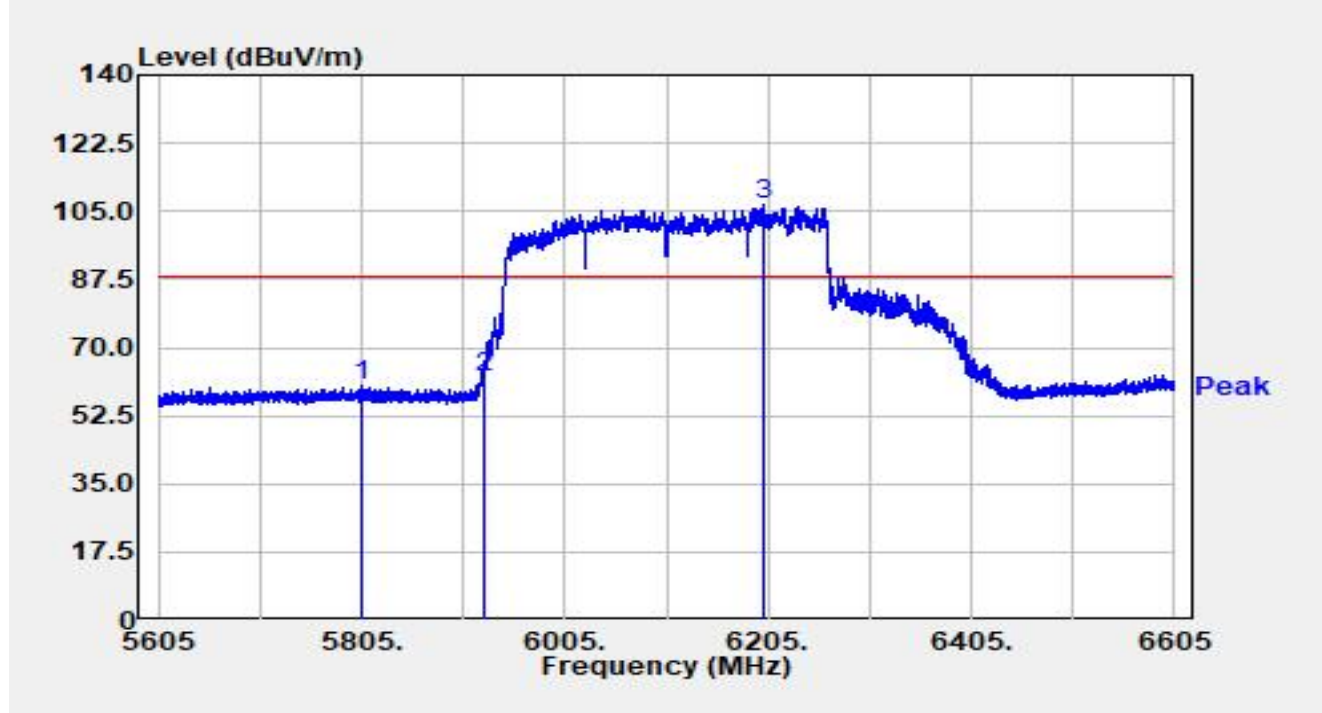


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5805.600	39.56	20.54	60.10	-28.10	88.20	Peak
2	*	5925.000	41.46	20.69	62.15	-26.05	88.20	Peak
3		6200.600	84.63	22.07	106.70	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-10-10
Test Engineer	Dick Shen	Temp./Humidity	24.9°C /36.8%
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320M at 6105MHz		

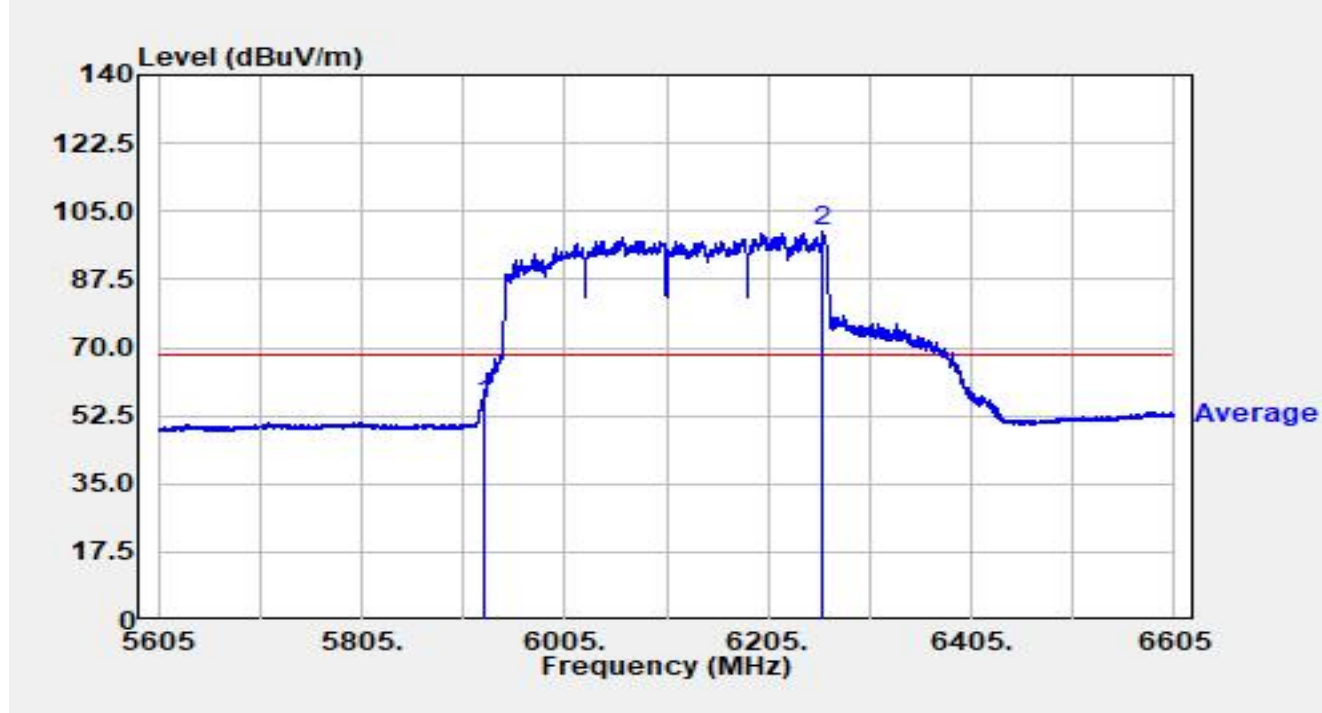


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	34.71	20.69	55.40	-12.80	68.20	Average
2		6258.800	77.83	21.78	99.61	N/A	N/A	Average

Notes:

1. "*", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site: WZ-SR2	Test Date: 2024-06-06
Temperature: 24.6°C	Humidity: 60.4%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_C	Polarity: Line
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmitted by 802.11be-EHT20 5955	

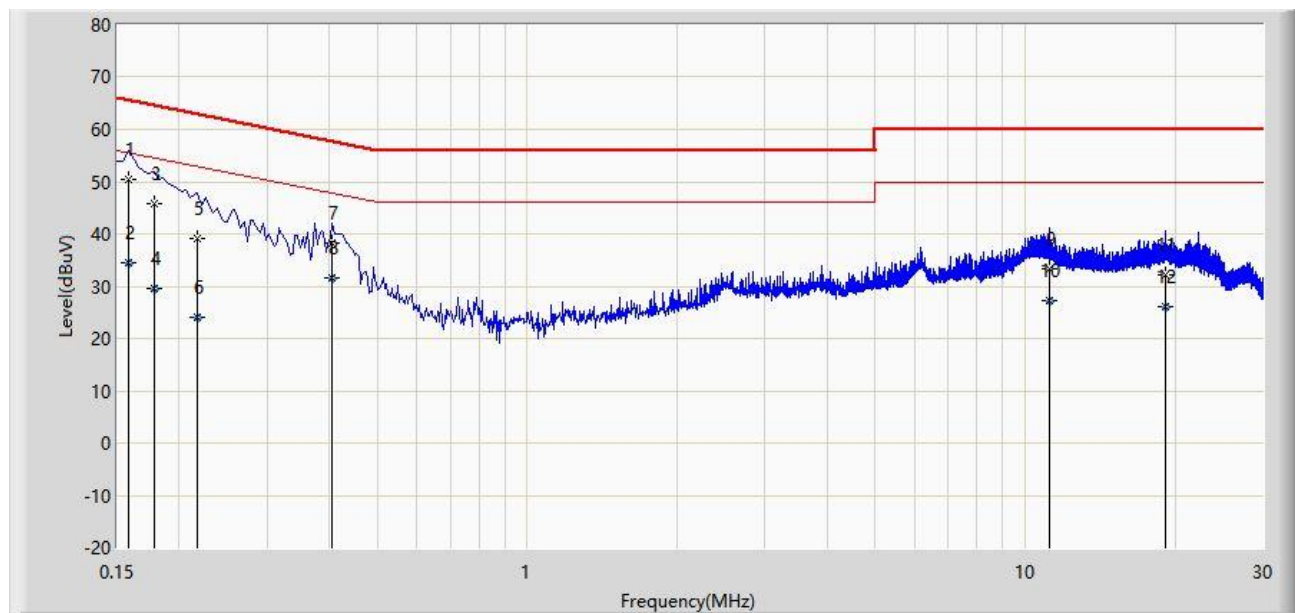


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1	*	0.158	50.404	40.586	-15.165	65.568	9.819	QP
2		0.158	34.475	24.657	-21.093	55.568	9.819	AV
3		0.178	45.676	35.860	-18.902	64.578	9.816	QP
4		0.178	29.516	19.699	-25.062	54.578	9.816	AV
5		0.218	39.149	29.328	-23.745	62.895	9.822	QP
6		0.218	24.003	14.181	-28.892	52.895	9.822	AV
7		0.406	38.234	28.347	-19.495	57.730	9.887	QP
8		0.406	31.687	21.800	-16.043	47.730	9.887	AV
9		11.198	33.368	22.965	-26.632	60.000	10.403	QP
10		11.198	27.115	16.711	-22.885	50.000	10.403	AV
11		19.166	32.072	21.132	-27.928	60.000	10.940	QP
12		19.166	26.101	15.160	-23.899	50.000	10.940	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Test Date: 2024-06-06
Temperature: 24.6°C	Humidity: 60.4%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Linda Wei
Probe: ENV216_101683_Filter Off_C	Polarity: Neutral
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmitted by 802.11be-EHT20 5955	

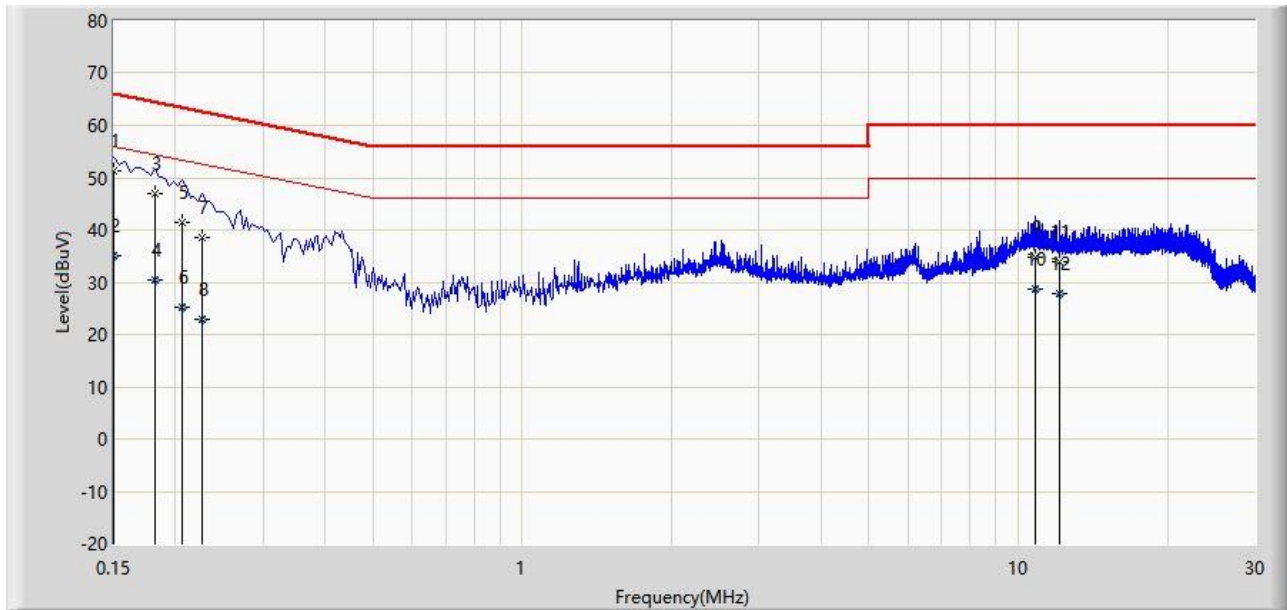

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1	*	0.150	51.224	41.090	-14.776	66.000	10.135	QP
2		0.150	34.959	24.824	-21.041	56.000	10.135	AV
3		0.182	46.941	36.829	-17.453	64.394	10.113	QP
4		0.182	30.438	20.326	-23.956	54.394	10.113	AV
5		0.206	41.481	31.377	-21.884	63.365	10.105	QP
6		0.206	25.202	15.098	-28.163	53.365	10.105	AV
7		0.226	38.672	28.573	-23.924	62.595	10.099	QP
8		0.226	22.994	12.894	-29.602	52.595	10.099	AV
9		10.810	34.921	24.269	-25.079	60.000	10.652	QP
10		10.810	28.642	17.990	-21.358	50.000	10.652	AV
11		12.110	33.914	23.209	-26.086	60.000	10.704	QP
12		12.110	27.969	17.264	-22.031	50.000	10.704	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2403RSU068-UT” file.

Appendix C – EUT Photograph

Refer to “2403RSU068-UE” file.

_____ The End _____