



802.11be-EHT160

Channel 207 (6985MHz)

The Reference Level

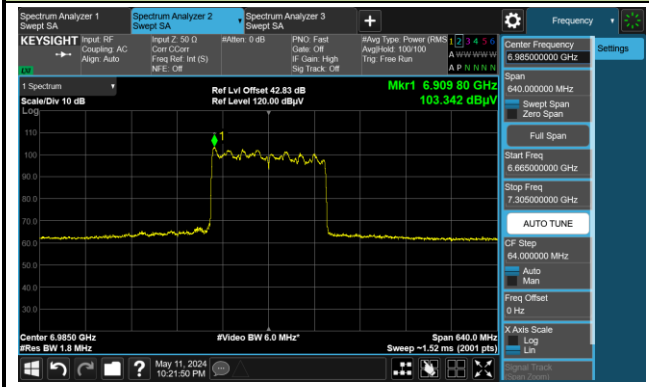


The Mask Data

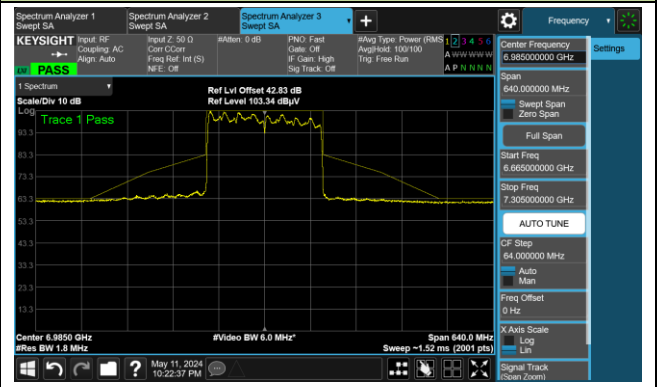


802.11be-EHT320-1

Channel 31 (6105MHz)

The Reference Level

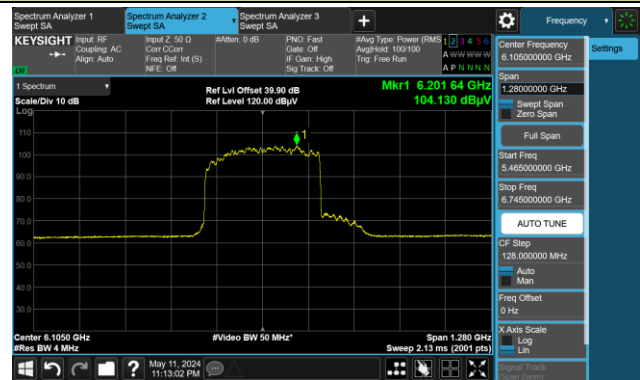


The Mask Data

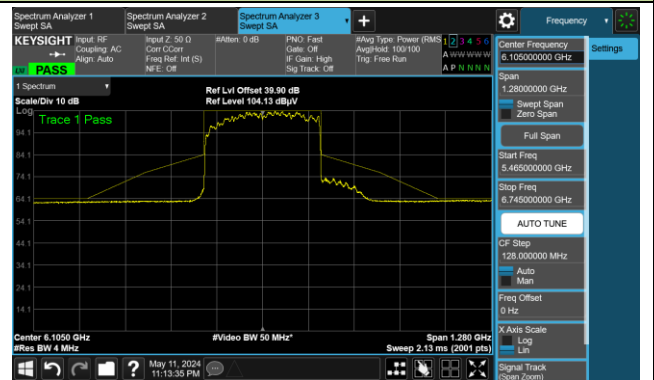


Channel 95 (6425MHz)

The Reference Level

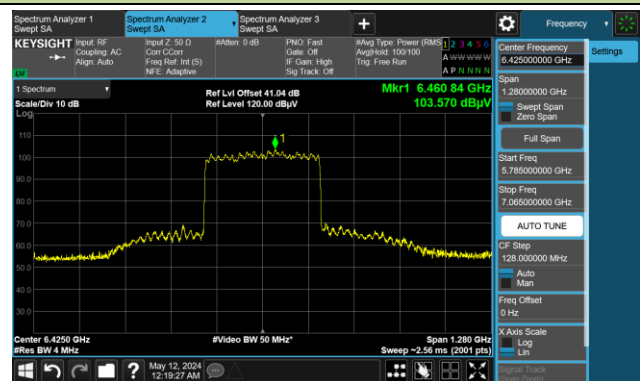


The Mask Data

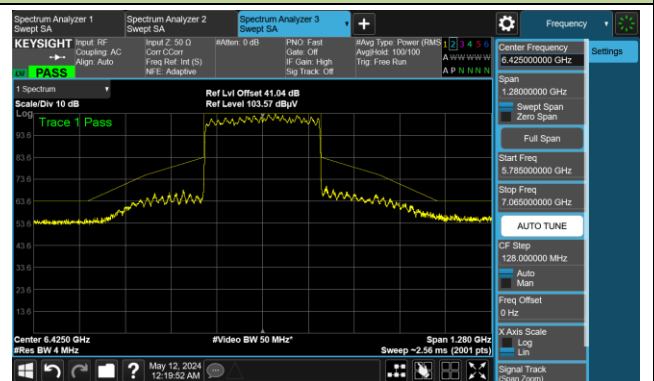


Channel 159 (6745MHz)

The Reference Level

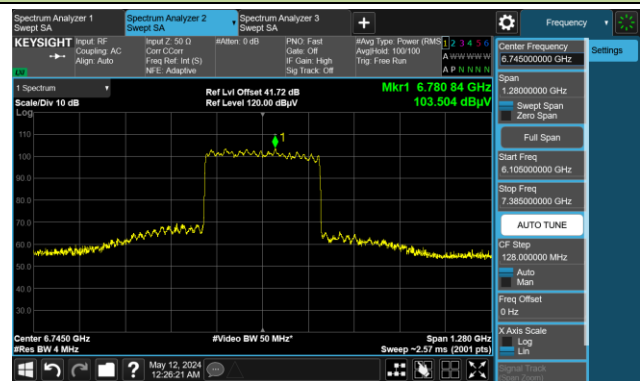


The Mask Data

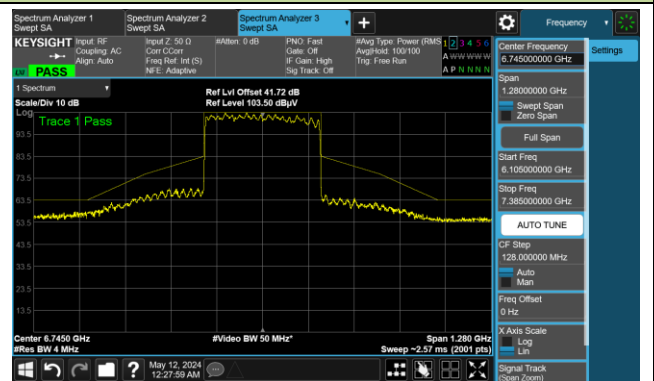


802.11be-EHT320-2

Channel 63 (6265MHz)

The Reference Level

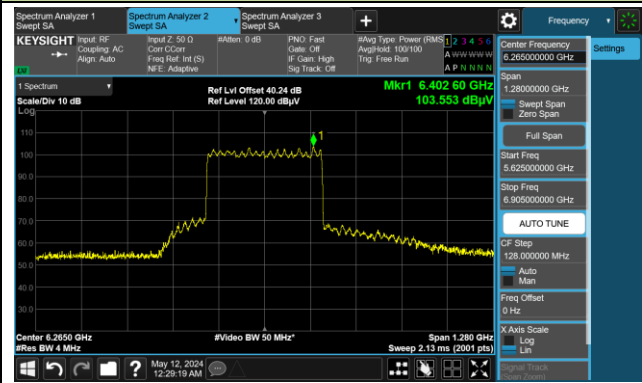


The Mask Data

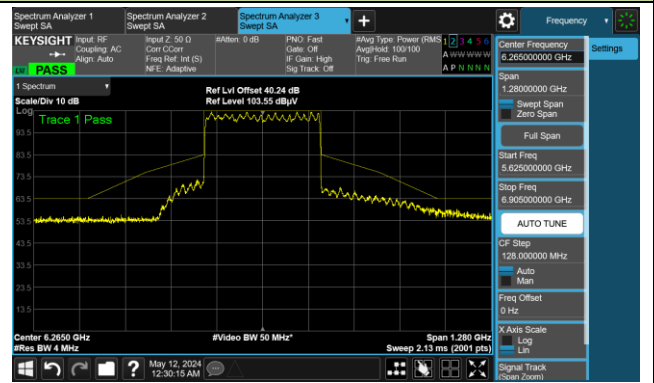


Channel 127 (6585MHz)

The Reference Level

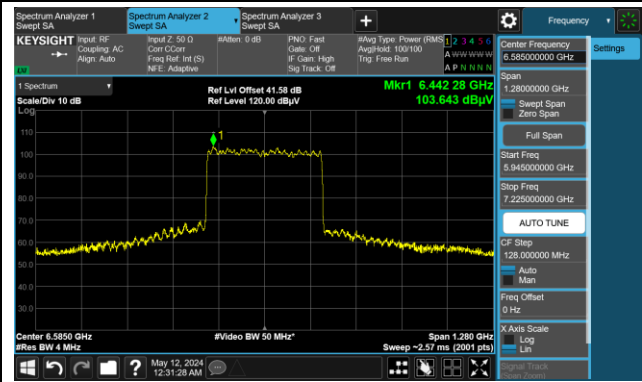


The Mask Data

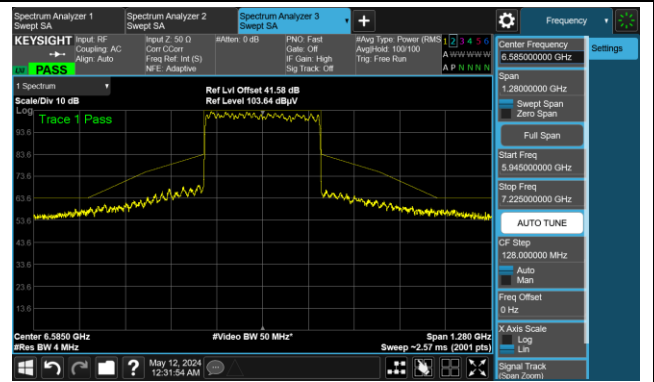


Channel 191 (6905MHz)

The Reference Level

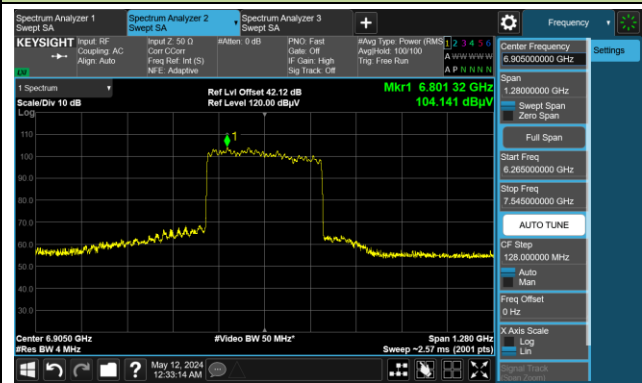

The Mask Data

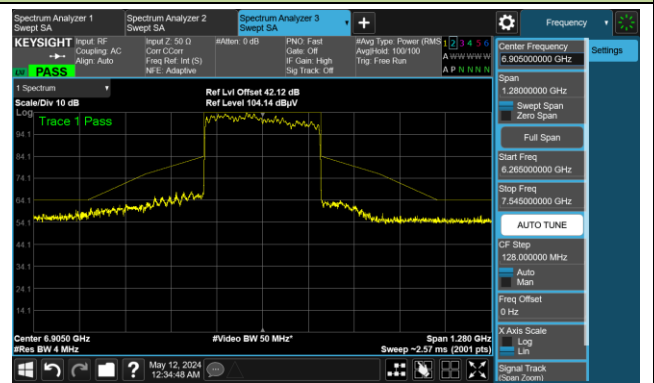

A.6 Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Luis Yang
Test Date	2024-05-09		
Test Mode	5955MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	- 30	12.44	12.39	12.38	12.38
		- 20	6.73	7.07	7.30	7.47
		- 10	2.70	2.77	2.85	2.97
		0	-4.38	-3.98	-3.83	-3.66
		+ 10	-6.50	-6.60	-6.63	-6.62
		+ 20	-11.08	-11.03	-10.98	-10.88
		+ 30	-11.25	-11.27	-11.27	-11.25
		+ 40	-11.37	-11.39	-11.39	-11.39
		+ 50	-11.44	-11.49	-11.49	-11.45
115	138	+ 20	-10.78	-10.63	-10.48	-10.31
85	102	+ 20	-10.71	-10.56	-10.39	-10.23

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.

A.7 Contention Based Protocol Test Result

Test Site	WZ-SR5	Test Engineer	Jeff Yang
Test Date	2024-07-21		

Test Channel	Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	AWGN Power (dBm)	Ant. Gain (dBi)	Adjust Power (dBm)	Detection Limit (dBm)	Detected Number	Detection Probability (%)	Limit (%)	Test Result
Operation Band: U-NII 5											
37	20	6135	6135	-67	3.6	-70.6	≤ -62.0	10	100	90	Pass
31	320	6105	5950	-63	3.6	-66.6	≤ -62.0	10	100	90	Pass
31	320	6105	6105	-67	3.6	-70.6	≤ -62.0	10	100	90	Pass
31	320	6105	6260	-72	3.6	-75.6	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 6											
101	20	6455	6455	-71	3.6	-74.6	≤ -62.0	10	100	90	Pass
95	320	6425	6270	-67	3.6	-70.6	≤ -62.0	10	100	90	Pass
95	320	6425	6425	-65	3.6	-68.6	≤ -62.0	10	100	90	Pass
95	320	6425	6580	-64	3.6	-67.6	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 7											
165	20	6775	6775	-69	3.6	-72.6	≤ -62.0	10	100	90	Pass
159	320	6745	6590	-68	3.6	-71.6	≤ -62.0	10	100	90	Pass
159	320	6745	6745	-68	3.6	-71.6	≤ -62.0	10	100	90	Pass
159	320	6745	6900	-67	3.6	-70.6	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 8											
213	20	7015	7015	-72	3.6	-75.6	≤ -62.0	10	100	90	Pass
191	320	6905	6750	-69	3.6	-72.6	≤ -62.0	10	100	90	Pass
191	320	6905	6905	-68	3.6	-71.6	≤ -62.0	10	100	90	Pass
191	320	6905	7060	-67	3.6	-70.6	≤ -62.0	10	100	90	Pass

Note 1: Adjust Power (dBm) = AWGN Power (dBm) – Antenna Gain (dBi).

Note 2: Conducted measurements are used.


Test Site	WZ-SR5	Test Engineer	Jeff Yang
Test Date	2024-07-21		

Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	Adjust Power (dBm)	EUT Tx Status
Operation Band: U-NII 5				
20	6135	6135	-74.6	ON
			-73.6	Minimal
			-70.6	OFF
320	6105	5950	-69.6	ON
			-68.6	Minimal
			-66.6	OFF
320	6105	6105	-74.6	ON
			-73.6	Minimal
			-70.6	OFF
320	6105	6260	-79.6	ON
			-78.6	Minimal
			-75.6	OFF
Operation Band: U-NII 6				
20	6455	6455	-78.6	ON
			-77.6	Minimal
			-74.6	OFF
320	6425	6270	-73.6	ON
			-72.6	Minimal
			-70.6	OFF
320	6425	6425	-75.6	ON
			-74.6	Minimal
			-68.6	OFF
320	6425	6580	-69.6	ON
			-68.6	Minimal
			-67.6	OFF


Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	Adjust Power (dBm)	EUT Status
Operation Band: U-NII 7				
20	6775	6775	-76.6	ON
			-75.6	Minimal
			-72.6	OFF
320	6745	6590	-74.6	ON
			-73.6	Minimal
			-71.6	OFF
320	6745	6745	-75.6	ON
			-74.6	Minimal
			-71.6	OFF
320	6745	6900	-73.6	ON
			-72.6	Minimal
			-70.6	OFF
Operation Band: U-NII 8				
20	7015	7015	-80.6	ON
			-79.6	Minimal
			-75.6	OFF
320	6905	6750	-75.6	ON
			-74.6	Minimal
			-72.6	OFF
320	6905	6905	-75.6	ON
			-74.6	Minimal
			-71.6	OFF
320	6905	7060	-72.6	ON
			-71.6	Minimal
			-70.6	OFF
Note: OFF: AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds Minimal: AWGN level at which the system begins to trigger the transmission switch-off, albeit not being kept off consistently ON: AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds				

EUT Tx Waveform


802.11be-EHT20 / CH37

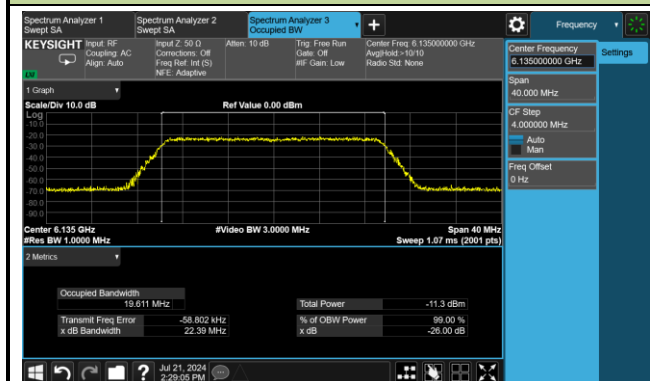


802.11be-EHT320 / CH31

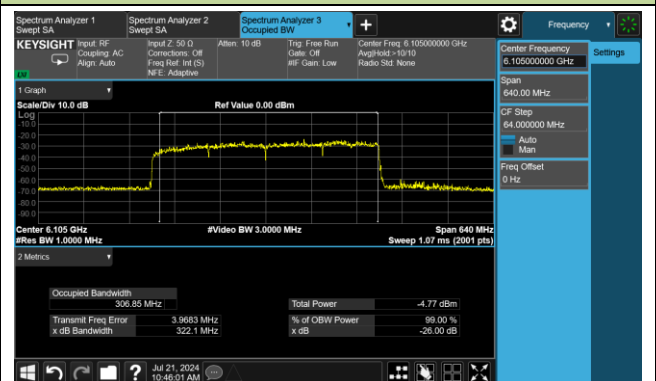


802.11be-EHT20 / CH101

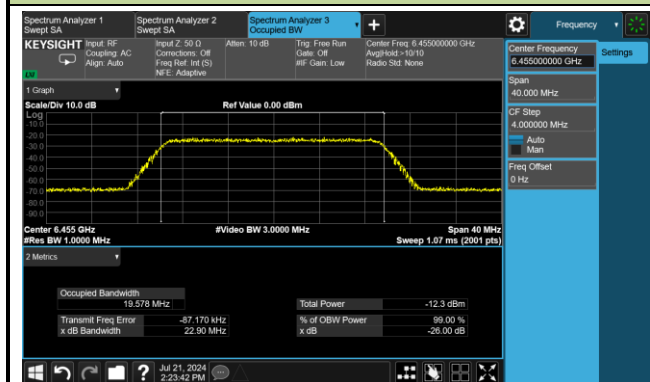


802.11be-EHT320 / CH95

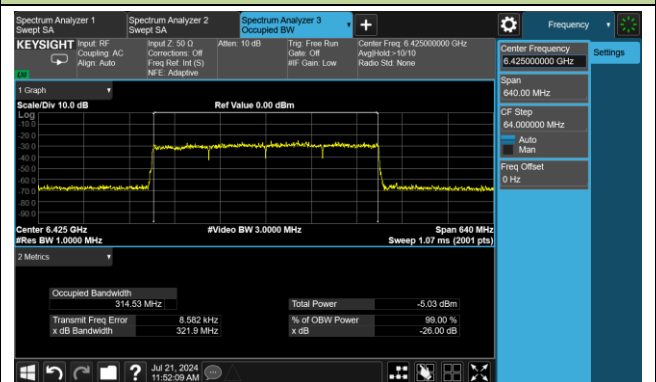


802.11be-EHT20 / CH165

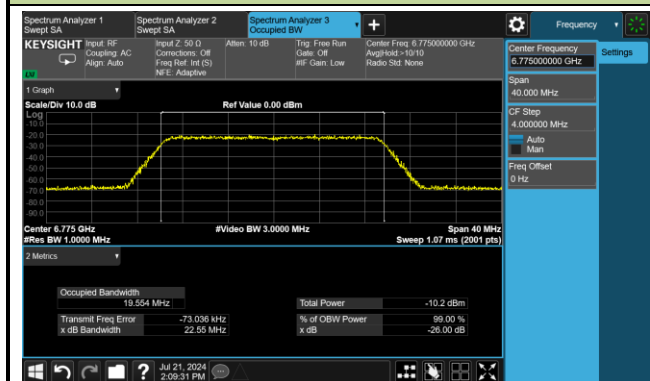


802.11be-EHT320 / CH159

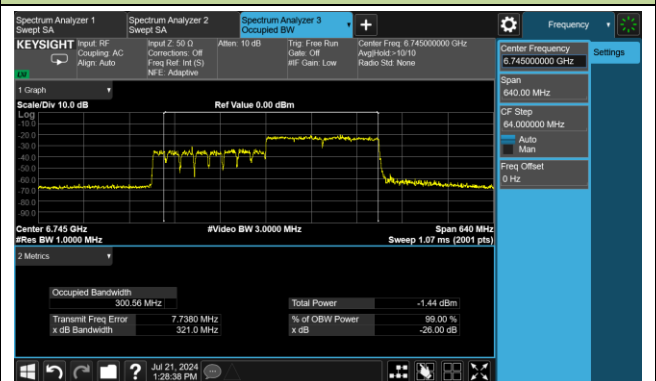

802.11be-EHT20 / CH213

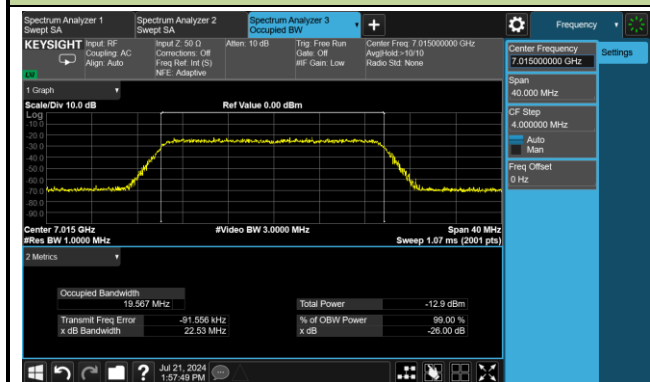


802.11be-EHT320 / CH191

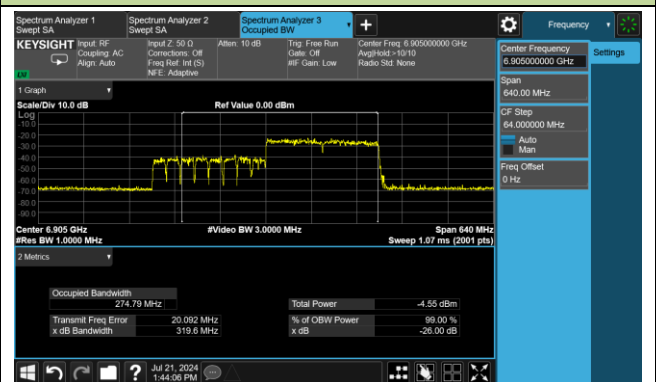


Incumbent Signal Calibration Plots (NII-5 Band)


802.11be-EHT20 / CH37

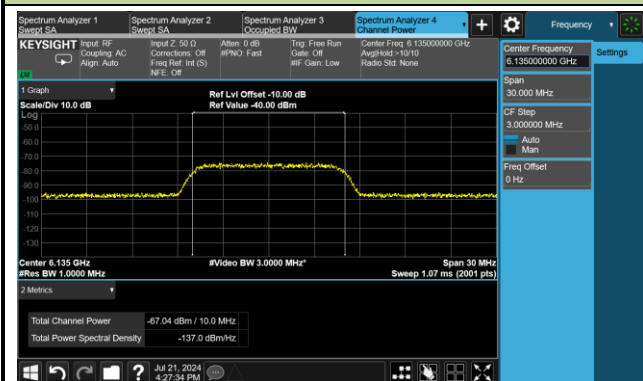


802.11be-EHT320 / CH31 (Low Edge)

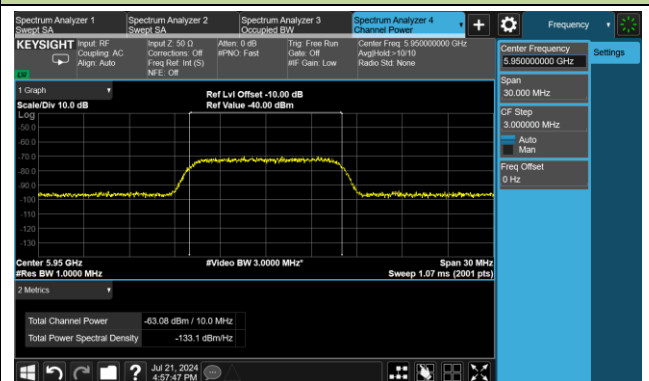

802.11be-EHT320 / CH31 (Middle)

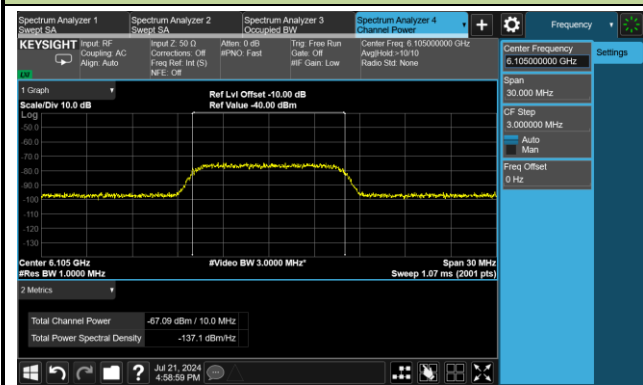


802.11be-EHT320 / CH31 (High Edge)

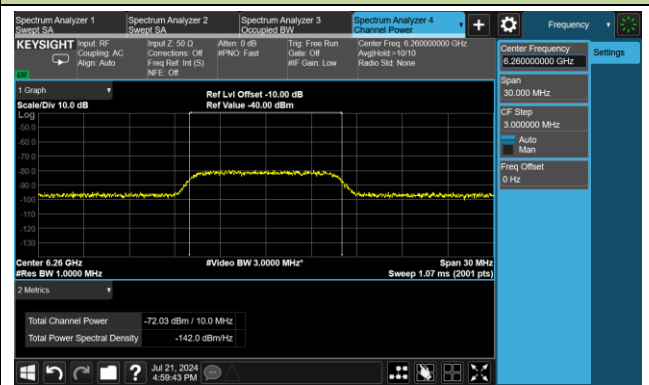


Incumbent Signal Calibration Plots (NII-6 Band)


802.11be-EHT20 / CH101

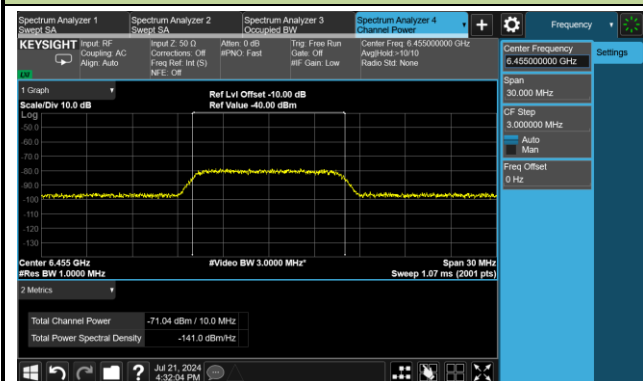


802.11be-EHT320 / CH95 (Low Edge)

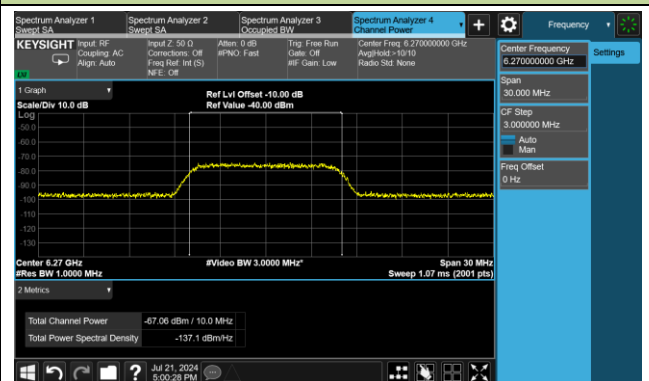

802.11be-EHT320 / CH95 (Middle)

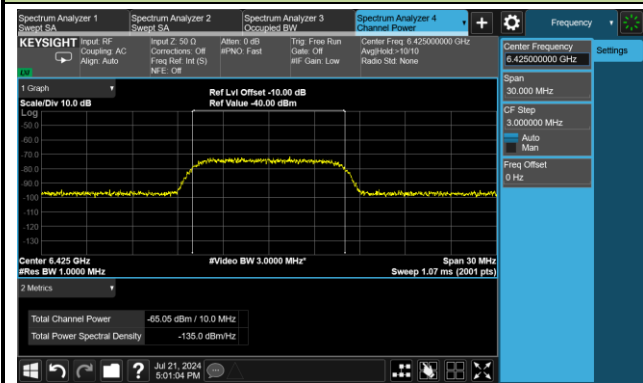


802.11be-EHT320 / CH95 (High Edge)

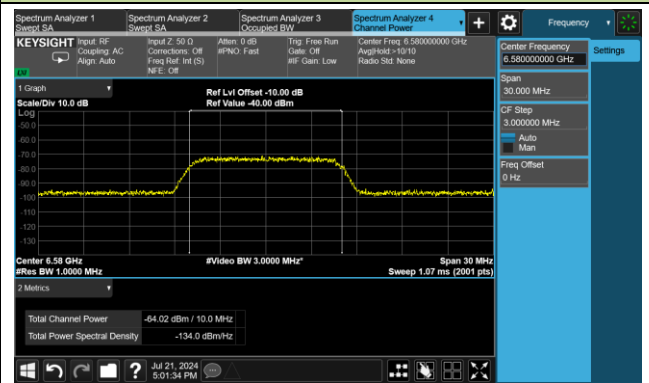


Incumbent Signal Calibration Plots (NII-7 Band)


802.11be-EHT20 / CH165

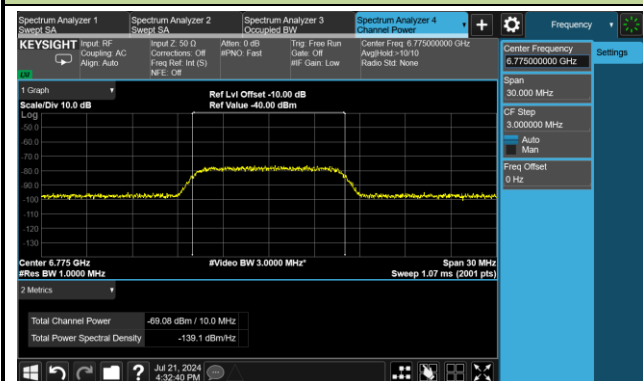


802.11be-EHT320 / CH159 (Low Edge)

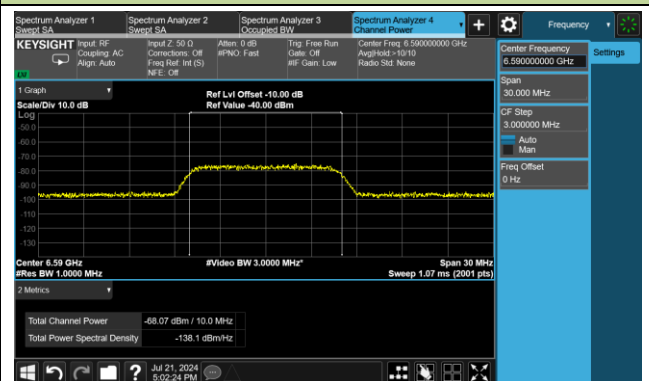

802.11be-EHT320 / CH159 (Middle)

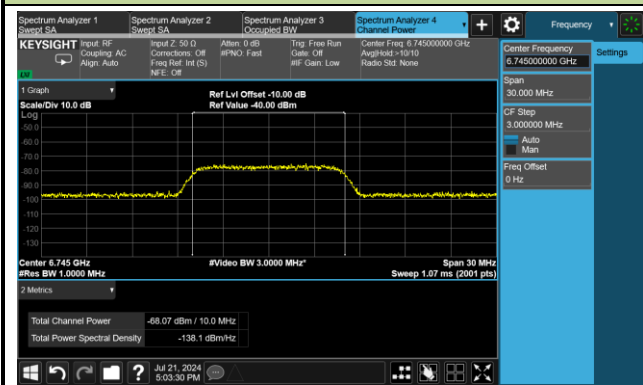


802.11be-EHT320 / CH159 (High Edge)

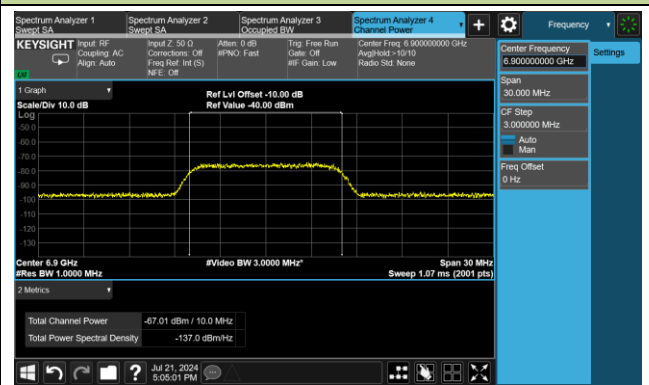


Incumbent Signal Calibration Plots (NII-8 Band)


802.11be-EHT20 / CH213

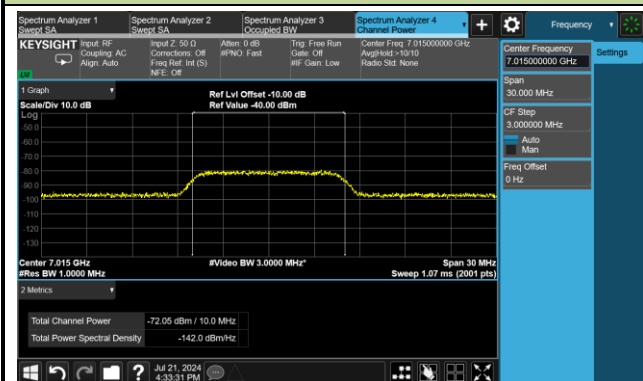


802.11be-EHT320 / CH191 (Low Edge)

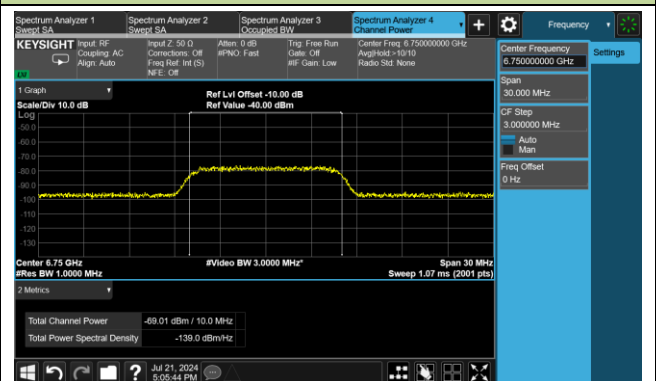

802.11be-EHT320 / CH191 (Middle)

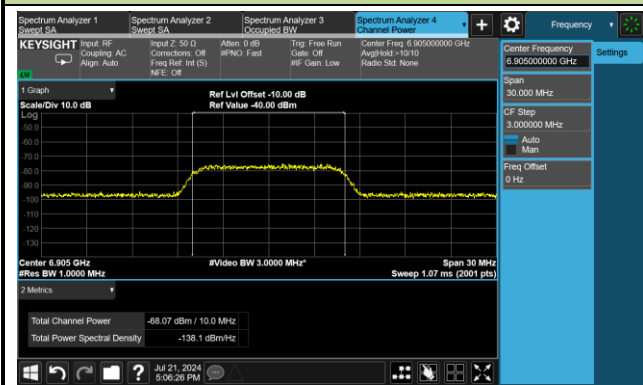


802.11be-EHT320 / CH191 (High Edge)

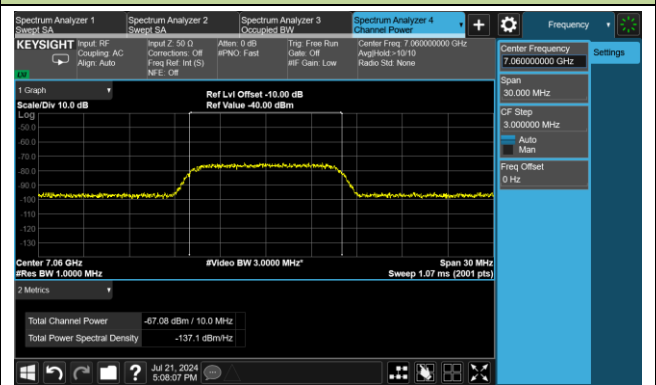


Test Result of EUT ceased transmission (NII-5 Band)


802.11be-EHT20 / CH37

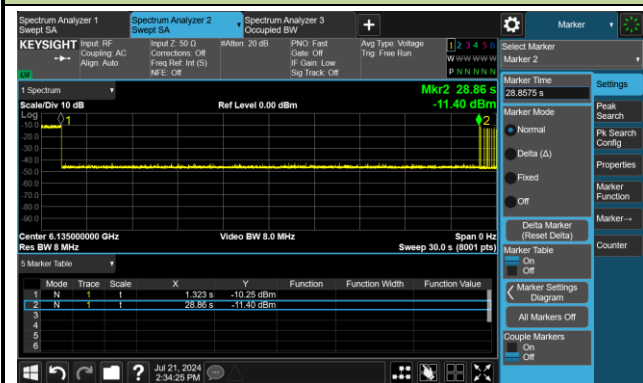


802.11be-EHT320 / CH31 (Low Edge)

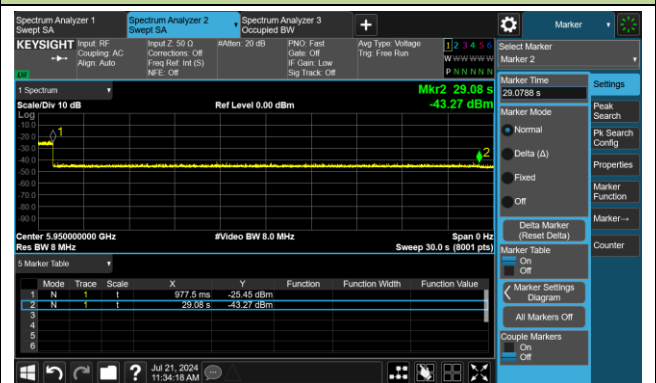

802.11be-EHT320 / CH31 (Middle)

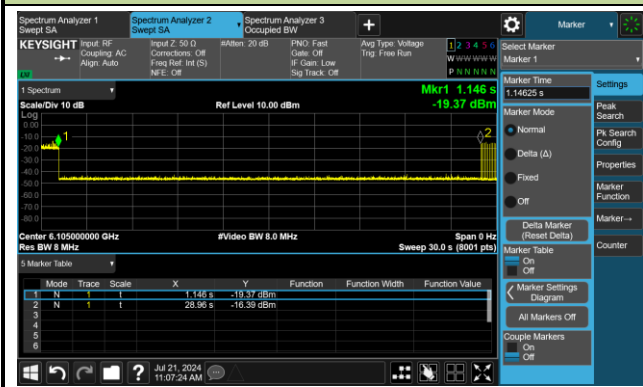


802.11be-EHT320 / CH31 (High Edge)

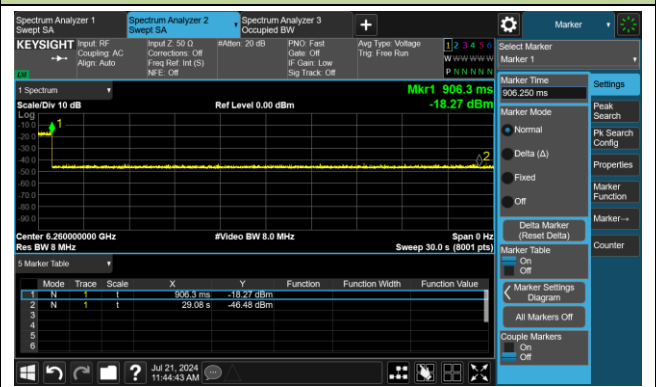


Test Result of EUT ceased transmission (NII-6 Band)


802.11be-EHT20 / CH101

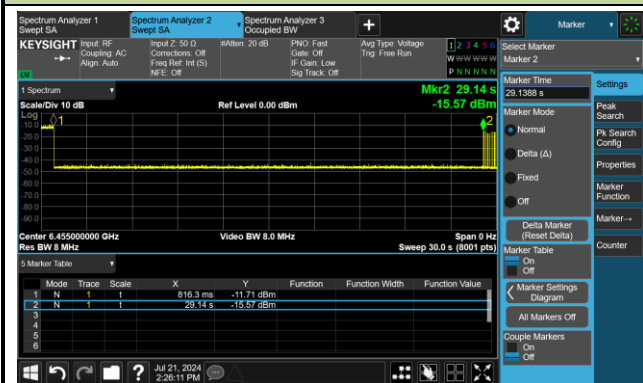


802.11be-EHT320 / CH95 (Low Edge)

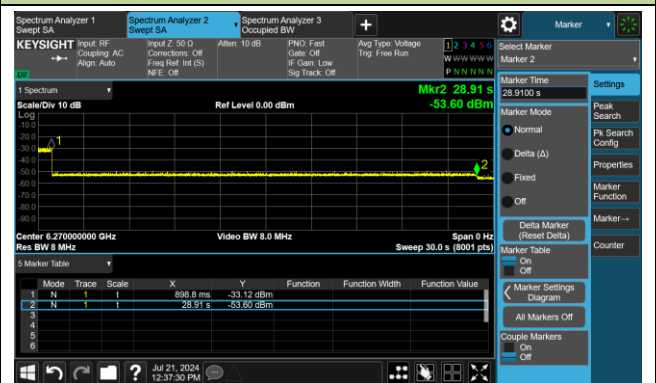

802.11be-EHT320 / CH95 (Middle)

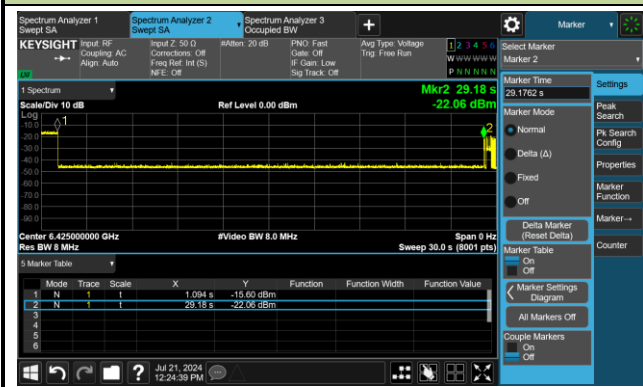


802.11be-EHT320 / CH95 (High Edge)

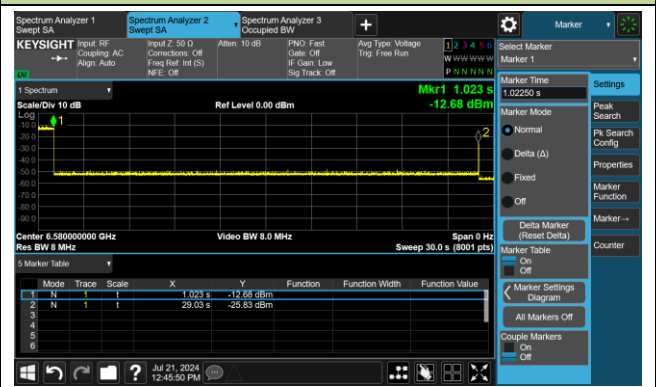


Test Result of EUT ceased transmission (NII-7 Band)


802.11be-EHT20 / CH165

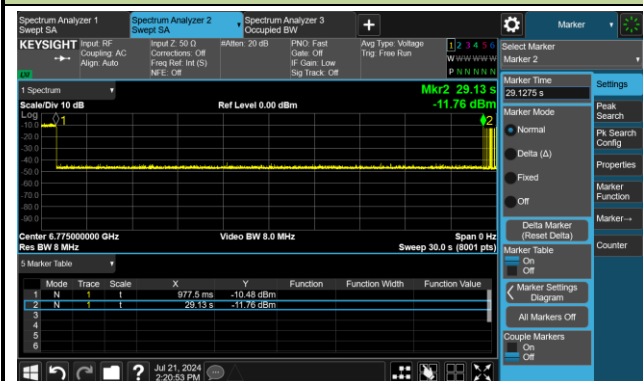


802.11be-EHT320 / CH159 (Low Edge)

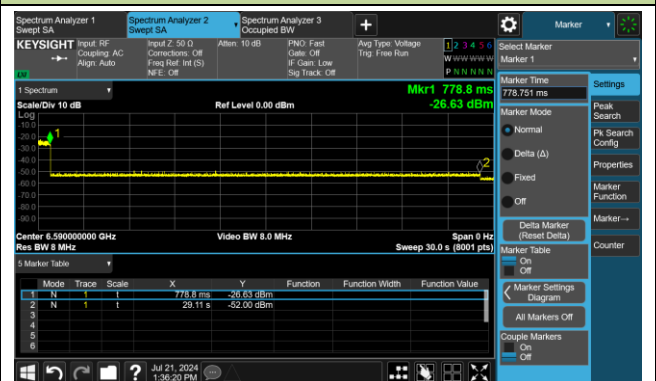

802.11be-EHT320 / CH159 (Middle)

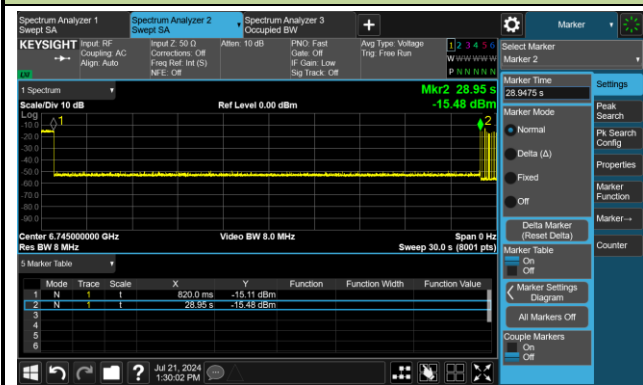


802.11be-EHT320 / CH159 (High Edge)

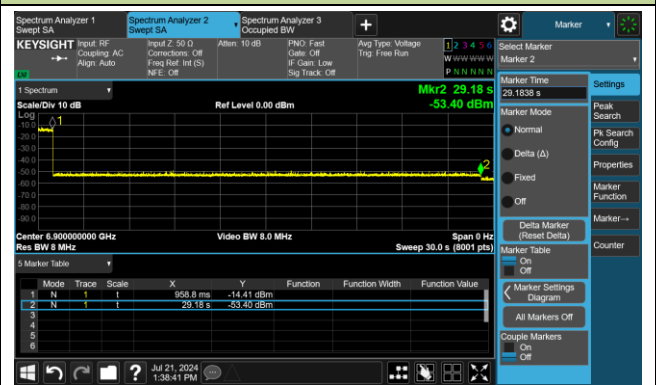


Test Result of EUT ceased transmission (NII-8 Band)


802.11be-EHT20 / CH213

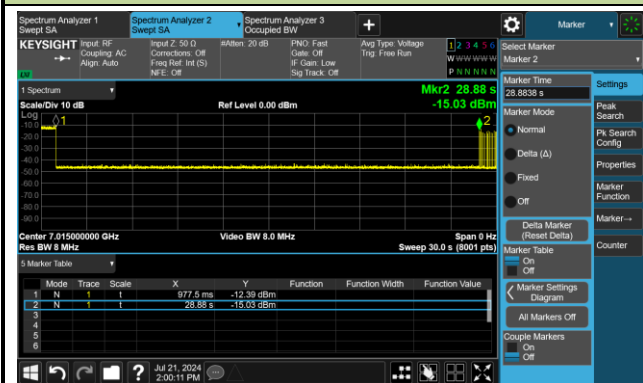


802.11be-EHT320 / CH191 (Low Edge)

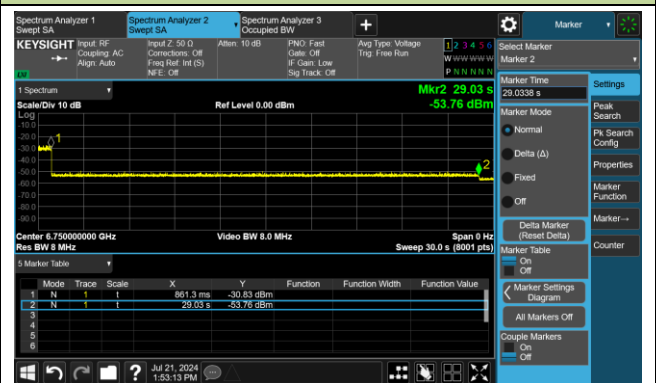

802.11be-EHT320 / CH191 (Middle)

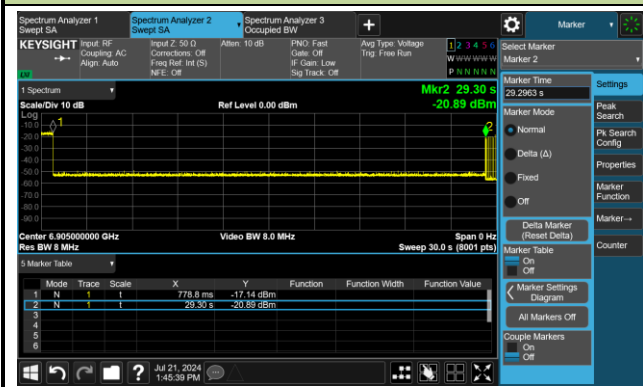

802.11be-EHT320 / CH191 (High Edge)

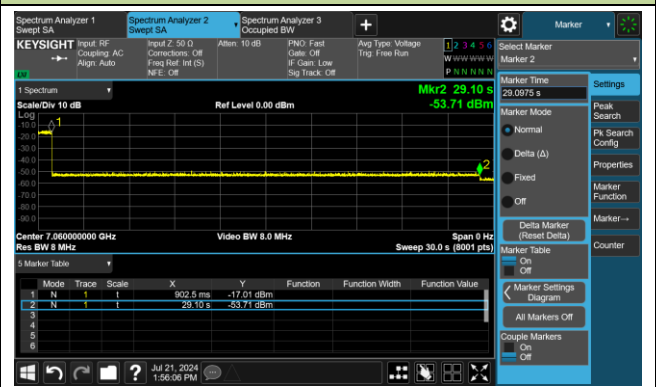

A.8 Radiated Spurious Emission Test Result

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8471.5	37.1	10.4	47.5	74.0	-26.5	Peak	Horizontal
*	9270.5	37.0	13.5	50.5	88.2	-37.7	Peak	Horizontal
	11693.0	36.3	14.2	50.5	74.0	-23.5	Peak	Horizontal
*	14642.5	36.9	16.5	53.4	88.2	-34.8	Peak	Horizontal
	8174.0	37.8	10.2	48.0	74.0	-26.0	Peak	Vertical
*	8786.0	36.8	11.5	48.3	88.2	-39.9	Peak	Vertical
*	14328.0	37.3	16.5	53.8	88.2	-34.4	Peak	Vertical
	15518.0	35.7	12.7	48.4	74.0	-25.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9763.5	35.8	14.1	49.9	88.2	-38.3	Peak	Horizontal
	11106.5	36.1	14.9	51.0	74.0	-23.0	Peak	Horizontal
*	14447.0	36.4	16.6	53.0	88.2	-35.2	Peak	Horizontal
	15756.0	35.2	12.4	47.6	74.0	-26.4	Peak	Horizontal
	8191.0	37.3	10.1	47.4	74.0	-26.6	Peak	Vertical
*	10222.5	36.6	14.2	50.8	88.2	-37.4	Peak	Vertical
*	14243.0	36.2	16.5	52.7	88.2	-35.5	Peak	Vertical
	15756.0	36.6	12.4	49.0	74.0	-25.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9449.0	36.3	13.4	49.7	74.0	-24.3	Peak	Horizontal
*	10163.0	36.1	14.2	50.3	88.2	-37.9	Peak	Horizontal
	11234.0	36.1	14.6	50.7	74.0	-23.3	Peak	Horizontal
*	14090.0	37.4	15.8	53.2	88.2	-35.0	Peak	Horizontal
	8403.5	36.8	10.2	47.0	74.0	-27.0	Peak	Vertical
*	9959.0	36.4	14.0	50.4	88.2	-37.8	Peak	Vertical
	11361.5	35.1	14.7	49.8	74.0	-24.2	Peak	Vertical
*	14183.5	35.5	16.1	51.6	88.2	-36.6	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE20	Test Channel	97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8199.5	35.8	10.0	45.8	74.0	-28.2	Peak	Horizontal
*	9874.0	35.9	14.2	50.1	88.2	-38.1	Peak	Horizontal
	15492.5	37.2	12.5	49.7	74.0	-24.3	Peak	Horizontal
*	17167.0	36.6	16.1	52.7	88.2	-35.5	Peak	Horizontal
	8369.5	36.9	9.9	46.8	74.0	-27.2	Peak	Vertical
*	9806.0	35.2	14.4	49.6	88.2	-38.6	Peak	Vertical
	11633.5	36.1	14.4	50.5	74.0	-23.5	Peak	Vertical
*	17014.0	35.5	16.2	51.7	88.2	-36.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE20	Test Channel	105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8276.0	36.1	9.9	46.0	74.0	-28.0	Peak	Horizontal
	11072.5	35.8	15.1	50.9	74.0	-23.1	Peak	Horizontal
*	14098.5	35.3	16.0	51.3	88.2	-36.9	Peak	Horizontal
*	17473.0	34.9	18.4	53.3	88.2	-34.9	Peak	Horizontal
	8276.0	36.1	9.9	46.0	74.0	-28.0	Peak	Vertical
*	9772.0	35.0	14.2	49.2	88.2	-39.0	Peak	Vertical
	12203.0	36.0	13.3	49.3	74.0	-24.7	Peak	Vertical
*	17226.5	35.5	16.6	52.1	88.2	-36.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE20	Test Channel	113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8463.0	36.9	10.3	47.2	74.0	-26.8	Peak	Horizontal
*	10341.5	35.8	14.6	50.4	88.2	-37.8	Peak	Horizontal
	11820.5	36.0	13.4	49.4	74.0	-24.6	Peak	Horizontal
*	14200.5	36.3	16.2	52.5	88.2	-35.7	Peak	Horizontal
*	9823.0	35.3	14.7	50.0	88.2	-38.2	Peak	Vertical
	11480.5	35.7	14.7	50.4	74.0	-23.6	Peak	Vertical
*	14294.0	36.2	16.4	52.6	88.2	-35.6	Peak	Vertical
	15832.5	36.4	12.0	48.4	74.0	-25.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	10350.0	35.0	14.7	49.7	88.2	-38.5	Peak	Horizontal
	11548.5	36.2	14.7	50.9	74.0	-23.1	Peak	Horizontal
*	12747.0	36.3	13.3	49.6	88.2	-38.6	Peak	Horizontal
	15424.5	35.0	13.0	48.0	74.0	-26.0	Peak	Horizontal
*	9823.0	35.7	14.7	50.4	88.2	-37.8	Peak	Vertical
	11548.5	36.2	14.7	50.9	74.0	-23.1	Peak	Vertical
*	14251.5	35.5	16.5	52.0	88.2	-36.2	Peak	Vertical
	15756.0	35.6	12.4	48.0	74.0	-26.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8446.0	36.1	10.3	46.4	74.0	-27.6	Peak	Horizontal
	10911.0	35.0	15.4	50.4	74.0	-23.6	Peak	Horizontal
*	14345.0	35.2	16.5	51.7	88.2	-36.5	Peak	Horizontal
*	17014.0	35.8	16.2	52.0	88.2	-36.2	Peak	Horizontal
	8165.5	37.0	10.2	47.2	74.0	-26.8	Peak	Vertical
*	9899.5	36.5	14.0	50.5	88.2	-37.7	Peak	Vertical
	12322.0	36.8	13.1	49.9	74.0	-24.1	Peak	Vertical
*	16937.5	35.9	16.1	52.0	88.2	-36.2	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8446.0	36.7	10.3	47.0	74.0	-27.0	Peak	Horizontal
*	9721.0	35.8	14.0	49.8	88.2	-38.4	Peak	Horizontal
	11625.0	36.2	14.3	50.5	74.0	-23.5	Peak	Horizontal
*	14192.0	35.1	16.3	51.4	88.2	-36.8	Peak	Horizontal
	8208.0	36.9	10.0	46.9	74.0	-27.1	Peak	Vertical
	11591.0	36.2	14.6	50.8	74.0	-23.2	Peak	Vertical
*	14277.0	35.5	16.4	51.9	88.2	-36.3	Peak	Vertical
*	17549.5	35.4	19.1	54.5	88.2	-33.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE20	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8191.0	37.1	10.1	47.2	74.0	-26.8	Peak	Horizontal
*	9916.5	35.3	14.4	49.7	88.2	-38.5	Peak	Horizontal
	11378.5	36.0	14.8	50.8	74.0	-23.2	Peak	Horizontal
*	16784.5	35.7	14.9	50.6	88.2	-37.6	Peak	Horizontal
	8233.5	36.5	9.9	46.4	74.0	-27.6	Peak	Vertical
	11472.0	36.0	14.8	50.8	74.0	-23.2	Peak	Vertical
*	14574.5	37.1	16.5	53.6	88.2	-34.6	Peak	Vertical
*	17235.0	35.7	16.4	52.1	88.2	-36.1	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE20	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8420.5	36.0	10.1	46.1	74.0	-27.9	Peak	Horizontal
*	9814.5	36.4	14.5	50.9	88.2	-37.3	Peak	Horizontal
	11795.0	35.9	13.6	49.5	74.0	-24.5	Peak	Horizontal
*	14574.5	37.1	16.5	53.6	88.2	-34.6	Peak	Horizontal
	8097.5	37.1	10.1	47.2	74.0	-26.8	Peak	Vertical
	11004.5	35.5	15.3	50.8	74.0	-23.2	Peak	Vertical
*	13648.0	37.5	14.7	52.2	88.2	-36.0	Peak	Vertical
*	16903.5	36.2	15.3	51.5	88.2	-36.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE20	Test Channel	213
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8310.0	36.6	10.1	46.7	74.0	-27.3	Peak	Horizontal
*	9729.5	35.8	14.0	49.8	88.2	-38.4	Peak	Horizontal
	11480.5	35.8	14.7	50.5	74.0	-23.5	Peak	Horizontal
*	14107.0	36.0	16.0	52.0	88.2	-36.2	Peak	Horizontal
	8497.0	36.7	10.6	47.3	74.0	-26.7	Peak	Vertical
	11514.5	35.6	14.8	50.4	74.0	-23.6	Peak	Vertical
*	14795.5	35.6	16.2	51.8	88.2	-36.4	Peak	Vertical
*	17422.0	36.3	18.0	54.3	88.2	-33.9	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE20	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8199.5	36.1	10.0	46.1	74.0	-27.9	Peak	Horizontal
	11480.5	35.9	14.7	50.6	74.0	-23.4	Peak	Horizontal
*	14804.0	35.8	16.1	51.9	88.2	-36.3	Peak	Horizontal
*	17022.5	35.3	16.2	51.5	88.2	-36.7	Peak	Horizontal
	8225.0	36.2	10.0	46.2	74.0	-27.8	Peak	Vertical
	11599.5	36.0	14.4	50.4	74.0	-23.6	Peak	Vertical
*	14702.0	36.6	16.4	53.0	88.2	-35.2	Peak	Vertical
*	17481.5	35.0	18.6	53.6	88.2	-34.6	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8454.5	36.6	10.3	46.9	74.0	-27.1	Peak	Horizontal
*	10494.5	36.5	14.9	51.4	88.2	-36.8	Peak	Horizontal
	11514.5	35.8	14.8	50.6	74.0	-23.4	Peak	Horizontal
*	17396.5	35.9	17.7	53.6	88.2	-34.6	Peak	Horizontal
	8208.0	36.9	10.0	46.9	74.0	-27.1	Peak	Vertical
	11472.0	36.0	14.8	50.8	74.0	-23.2	Peak	Vertical
*	14277.0	36.1	16.4	52.5	88.2	-35.7	Peak	Vertical
*	17456.0	36.8	18.3	55.1	88.2	-33.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	9228.0	36.3	13.4	49.7	88.2	-38.5	Peak	Horizontal
	11404.0	35.5	14.8	50.3	74.0	-23.7	Peak	Horizontal
	11897.0	36.2	13.4	49.6	74.0	-24.4	Peak	Horizontal
*	14404.5	36.3	16.5	52.8	88.2	-35.4	Peak	Horizontal
	8497.0	36.2	10.6	46.8	74.0	-27.2	Peak	Vertical
	11098.0	35.5	14.9	50.4	74.0	-23.6	Peak	Vertical
*	14413.0	36.2	16.4	52.6	88.2	-35.6	Peak	Vertical
*	17464.5	35.5	18.4	53.9	88.2	-34.3	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8437.5	37.4	10.2	47.6	74.0	-26.4	Peak	Horizontal
*	9925.0	35.2	14.5	49.7	88.2	-38.5	Peak	Horizontal
	11446.5	35.6	14.9	50.5	74.0	-23.5	Peak	Horizontal
*	14268.5	35.6	16.4	52.0	88.2	-36.2	Peak	Horizontal
	8216.5	36.7	10.0	46.7	74.0	-27.3	Peak	Vertical
*	9916.5	35.8	14.4	50.2	88.2	-38.0	Peak	Vertical
	11115.0	36.1	14.9	51.0	74.0	-23.0	Peak	Vertical
*	17277.5	36.2	16.4	52.6	88.2	-35.6	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE40	Test Channel	99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8242.0	35.6	9.9	45.5	74.0	-28.5	Peak	Horizontal
	11081.0	35.0	14.9	49.9	74.0	-24.1	Peak	Horizontal
*	14404.5	36.5	16.5	53.0	88.2	-35.2	Peak	Horizontal
*	17243.5	36.3	16.3	52.6	88.2	-35.6	Peak	Horizontal
	8446.0	36.7	10.3	47.0	74.0	-27.0	Peak	Vertical
*	9823.0	34.3	14.7	49.0	88.2	-39.2	Peak	Vertical
	11429.5	35.8	14.8	50.6	74.0	-23.4	Peak	Vertical
*	17328.5	36.1	17.0	53.1	88.2	-35.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE40	Test Channel	107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8446.0	36.7	10.3	47.0	74.0	-27.0	Peak	Horizontal
*	9814.5	34.9	14.5	49.4	88.2	-38.8	Peak	Horizontal
	10945.0	36.1	15.3	51.4	74.0	-22.6	Peak	Horizontal
*	17422.0	36.1	18.0	54.1	88.2	-34.1	Peak	Horizontal
	8174.0	36.7	10.2	46.9	74.0	-27.1	Peak	Vertical
*	9891.0	35.2	14.0	49.2	88.2	-39.0	Peak	Vertical
	11064.0	35.2	15.3	50.5	74.0	-23.5	Peak	Vertical
*	14277.0	35.4	16.4	51.8	88.2	-36.4	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE40	Test Channel	115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8454.5	36.7	10.3	47.0	74.0	-27.0	Peak	Horizontal
	11506.0	35.9	14.9	50.8	74.0	-23.2	Peak	Horizontal
*	14515.0	36.0	16.6	52.6	88.2	-35.6	Peak	Horizontal
*	17388.0	35.7	17.5	53.2	88.2	-35.0	Peak	Horizontal
	8335.5	37.2	9.8	47.0	74.0	-27.0	Peak	Vertical
*	10256.5	36.2	14.5	50.7	88.2	-37.5	Peak	Vertical
	11310.5	36.2	14.6	50.8	74.0	-23.2	Peak	Vertical
*	17464.5	35.7	18.4	54.1	88.2	-34.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8199.5	37.3	10.0	47.3	74.0	-26.7	Peak	Horizontal
*	9823.0	35.1	14.7	49.8	88.2	-38.4	Peak	Horizontal
	11693.0	36.5	14.2	50.7	74.0	-23.3	Peak	Horizontal
*	17464.5	36.2	18.4	54.6	88.2	-33.6	Peak	Horizontal
	8301.5	37.1	9.9	47.0	74.0	-27.0	Peak	Vertical
*	10069.5	35.4	13.9	49.3	88.2	-38.9	Peak	Vertical
	11514.5	36.1	14.8	50.9	74.0	-23.1	Peak	Vertical
*	16920.5	36.3	15.7	52.0	88.2	-36.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8182.5	36.8	10.1	46.9	74.0	-27.1	Peak	Horizontal
*	9806.0	34.9	14.4	49.3	88.2	-38.9	Peak	Horizontal
	11506.0	35.9	14.9	50.8	74.0	-23.2	Peak	Horizontal
*	14464.0	37.1	16.5	53.6	88.2	-34.6	Peak	Horizontal
	8182.5	36.8	10.1	46.9	74.0	-27.1	Peak	Vertical
*	9959.0	35.7	14.0	49.7	88.2	-38.5	Peak	Vertical
	11506.0	35.9	14.9	50.8	74.0	-23.2	Peak	Vertical
*	14464.0	37.1	16.5	53.6	88.2	-34.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8361.0	37.9	9.9	47.8	74.0	-26.2	Peak	Horizontal
	11463.5	35.8	14.8	50.6	74.0	-23.4	Peak	Horizontal
*	13877.5	35.7	15.5	51.2	88.2	-37.0	Peak	Horizontal
*	17039.5	35.5	16.0	51.5	88.2	-36.7	Peak	Horizontal
	8497.0	35.9	10.6	46.5	74.0	-27.5	Peak	Vertical
	11676.0	36.0	14.2	50.2	74.0	-23.8	Peak	Vertical
*	13988.0	35.2	15.5	50.7	88.2	-37.5	Peak	Vertical
*	16861.0	35.5	15.6	51.1	88.2	-37.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE40	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8480.0	36.7	10.4	47.1	74.0	-26.9	Peak	Horizontal
	11098.0	35.3	14.9	50.2	74.0	-23.8	Peak	Horizontal
*	14141.0	36.6	15.6	52.2	88.2	-36.0	Peak	Horizontal
*	17532.5	36.4	18.7	55.1	88.2	-33.1	Peak	Horizontal
	8454.5	35.7	10.3	46.0	74.0	-28.0	Peak	Vertical
*	9874.0	35.3	14.2	49.5	88.2	-38.7	Peak	Vertical
	11472.0	36.1	14.8	50.9	74.0	-23.1	Peak	Vertical
*	17073.5	35.7	16.0	51.7	88.2	-36.5	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE40	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8165.5	36.9	10.2	47.1	74.0	-26.9	Peak	Horizontal
	11132.0	35.9	14.6	50.5	74.0	-23.5	Peak	Horizontal
*	14387.5	35.4	16.6	52.0	88.2	-36.2	Peak	Horizontal
*	17634.5	34.7	20.2	54.9	88.2	-33.3	Peak	Horizontal
	8182.5	35.9	10.1	46.0	74.0	-28.0	Peak	Vertical
*	10146.0	35.3	13.8	49.1	88.2	-39.1	Peak	Vertical
	11531.5	35.3	14.7	50.0	74.0	-24.0	Peak	Vertical
*	16742.0	35.1	14.7	49.8	88.2	-38.4	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE40	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8420.5	36.0	10.1	46.1	74.0	-27.9	Peak	Horizontal
	11506.0	35.8	14.9	50.7	74.0	-23.3	Peak	Horizontal
*	14778.5	35.3	16.4	51.7	88.2	-36.5	Peak	Horizontal
*	17277.5	35.5	16.4	51.9	88.2	-36.3	Peak	Horizontal
	8191.0	36.6	10.1	46.7	74.0	-27.3	Peak	Vertical
*	9823.0	34.2	14.7	48.9	88.2	-39.3	Peak	Vertical
	11531.5	36.2	14.7	50.9	74.0	-23.1	Peak	Vertical
*	17243.5	35.4	16.3	51.7	88.2	-36.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-01
Test Mode	802.11ax-HE40	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8301.5	37.0	9.9	46.9	74.0	-27.1	Peak	Horizontal
	11548.5	35.2	14.7	49.9	74.0	-24.1	Peak	Horizontal
*	14404.5	35.6	16.5	52.1	88.2	-36.1	Peak	Horizontal
*	16929.0	35.5	15.8	51.3	88.2	-36.9	Peak	Horizontal
	8097.5	36.6	10.1	46.7	74.0	-27.3	Peak	Vertical
*	9891.0	35.2	14.0	49.2	88.2	-39.0	Peak	Vertical
	11514.5	35.4	14.8	50.2	74.0	-23.8	Peak	Vertical
*	17226.5	35.8	16.6	52.4	88.2	-35.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8131.5	37.3	10.2	47.5	74.0	-26.5	Peak	Horizontal
*	9899.5	35.6	14.0	49.6	88.2	-38.6	Peak	Horizontal
	11557.0	35.7	14.7	50.4	74.0	-23.6	Peak	Horizontal
*	14719.0	36.8	16.4	53.2	88.2	-35.0	Peak	Horizontal
	8463.0	36.5	10.3	46.8	74.0	-27.2	Peak	Vertical
*	9899.5	35.6	14.0	49.6	88.2	-38.6	Peak	Vertical
	11557.0	35.7	14.7	50.4	74.0	-23.6	Peak	Vertical
*	14719.0	36.8	16.4	53.2	88.2	-35.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	8114.5	35.9	10.3	46.2	74.0	-27.8	Peak	Horizontal
*	9823.0	35.5	14.7	50.2	88.2	-38.0	Peak	Horizontal
	11174.5	35.3	14.8	50.1	74.0	-23.9	Peak	Horizontal
*	17388.0	35.7	17.5	53.2	88.2	-35.0	Peak	Horizontal
	8463.0	36.1	10.3	46.4	74.0	-27.6	Peak	Vertical
*	9916.5	34.9	14.4	49.3	88.2	-38.9	Peak	Vertical
	11072.5	34.5	15.1	49.6	74.0	-24.4	Peak	Vertical
*	14192.0	35.5	16.3	51.8	88.2	-36.4	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9151.5	36.5	12.5	49.0	74.0	-25.0	Peak	Horizontal
	11276.5	35.2	14.7	49.9	74.0	-24.1	Peak	Horizontal
*	14268.5	37.0	16.4	53.4	88.2	-34.8	Peak	Horizontal
*	17575.0	36.4	19.4	55.8	88.2	-32.4	Peak	Horizontal
	9041.0	37.5	12.0	49.5	74.0	-24.5	Peak	Vertical
	11846.0	35.9	13.6	49.5	74.0	-24.5	Peak	Vertical
*	14574.5	36.8	16.5	53.3	88.2	-34.9	Peak	Vertical
*	17549.5	36.9	19.1	56.0	88.2	-32.2	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE80	Test Channel	103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9134.5	35.6	12.3	47.9	74.0	-26.1	Peak	Horizontal
	11395.5	36.0	14.8	50.8	74.0	-23.2	Peak	Horizontal
*	14192.0	36.9	16.3	53.2	88.2	-35.0	Peak	Horizontal
*	17379.5	36.5	17.4	53.9	88.2	-34.3	Peak	Horizontal
	9134.5	34.8	12.3	47.1	74.0	-26.9	Peak	Vertical
	11557.0	36.1	14.7	50.8	74.0	-23.2	Peak	Vertical
*	15067.5	36.8	15.1	51.9	88.2	-36.3	Peak	Vertical
*	17558.0	35.2	19.3	54.5	88.2	-33.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE80	Test Channel	119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9049.5	34.9	11.9	46.8	74.0	-27.2	Peak	Horizontal
	11361.5	35.8	14.7	50.5	74.0	-23.5	Peak	Horizontal
*	14685.0	35.9	16.5	52.4	88.2	-35.8	Peak	Horizontal
*	17507.0	34.9	18.9	53.8	88.2	-34.4	Peak	Horizontal
	9381.0	34.7	13.6	48.3	74.0	-25.7	Peak	Vertical
	11183.0	35.8	14.8	50.6	74.0	-23.4	Peak	Vertical
*	14098.5	36.1	16.0	52.1	88.2	-36.1	Peak	Vertical
*	17549.5	35.3	19.1	54.4	88.2	-33.8	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9109.0	36.8	12.3	49.1	74.0	-24.9	Peak	Horizontal
	11582.5	36.0	14.4	50.4	74.0	-23.6	Peak	Horizontal
*	14761.5	35.4	16.4	51.8	88.2	-36.4	Peak	Horizontal
*	17626.0	35.4	19.7	55.1	88.2	-33.1	Peak	Horizontal
	9423.5	34.6	13.6	48.2	74.0	-25.8	Peak	Vertical
	11455.0	35.8	14.8	50.6	74.0	-23.4	Peak	Vertical
*	14302.5	35.8	16.4	52.2	88.2	-36.0	Peak	Vertical
*	17583.5	35.9	19.5	55.4	88.2	-32.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9389.5	35.2	13.4	48.6	74.0	-25.4	Peak	Horizontal
	11395.5	36.0	14.8	50.8	74.0	-23.2	Peak	Horizontal
*	14787.0	36.0	16.3	52.3	88.2	-35.9	Peak	Horizontal
*	17388.0	35.5	17.5	53.0	88.2	-35.2	Peak	Horizontal
	9381.0	34.1	13.6	47.7	74.0	-26.3	Peak	Vertical
	11710.0	36.2	14.0	50.2	74.0	-23.8	Peak	Vertical
*	14345.0	35.6	16.5	52.1	88.2	-36.1	Peak	Vertical
*	17626.0	34.9	19.7	54.6	88.2	-33.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9347.0	36.5	13.4	49.9	74.0	-24.1	Peak	Horizontal
	11514.5	35.6	14.8	50.4	74.0	-23.6	Peak	Horizontal
*	14379.0	35.4	16.6	52.0	88.2	-36.2	Peak	Horizontal
*	17473.0	35.1	18.4	53.5	88.2	-34.7	Peak	Horizontal
	9491.5	36.3	13.4	49.7	74.0	-24.3	Peak	Vertical
	10987.5	35.3	15.4	50.7	74.0	-23.3	Peak	Vertical
*	14863.5	35.4	16.3	51.7	88.2	-36.5	Peak	Vertical
*	17481.5	35.4	18.6	54.0	88.2	-34.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE80	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9168.5	35.3	12.8	48.1	74.0	-25.9	Peak	Horizontal
	10970.5	35.1	15.3	50.4	74.0	-23.6	Peak	Horizontal
*	14855.0	35.6	16.3	51.9	88.2	-36.3	Peak	Horizontal
*	17388.0	36.0	17.5	53.5	88.2	-34.7	Peak	Horizontal
	9364.0	36.0	13.5	49.5	74.0	-24.5	Peak	Vertical
	11761.0	37.1	13.5	50.6	74.0	-23.4	Peak	Vertical
*	14311.0	36.0	16.4	52.4	88.2	-35.8	Peak	Vertical
*	17575.0	35.3	19.4	54.7	88.2	-33.5	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE80	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9126.0	36.5	12.2	48.7	74.0	-25.3	Peak	Horizontal
	11506.0	35.8	14.9	50.7	74.0	-23.3	Peak	Horizontal
*	14285.5	35.9	16.4	52.3	88.2	-35.9	Peak	Horizontal
*	17464.5	35.5	18.4	53.9	88.2	-34.3	Peak	Horizontal
	9364.0	36.0	13.5	49.5	74.0	-24.5	Peak	Vertical
	11497.5	36.3	14.7	51.0	74.0	-23.0	Peak	Vertical
*	14404.5	36.4	16.5	52.9	88.2	-35.3	Peak	Vertical
*	17575.0	35.2	19.4	54.6	88.2	-33.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE80	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9381.0	35.3	13.6	48.9	74.0	-25.1	Peak	Horizontal
	11174.5	36.0	14.8	50.8	74.0	-23.2	Peak	Horizontal
*	14804.0	36.0	16.1	52.1	88.2	-36.1	Peak	Horizontal
*	17422.0	36.0	18.0	54.0	88.2	-34.2	Peak	Horizontal
	9466.0	36.1	13.6	49.7	74.0	-24.3	Peak	Vertical
	11480.5	35.3	14.7	50.0	74.0	-24.0	Peak	Vertical
*	14362.0	35.7	16.7	52.4	88.2	-35.8	Peak	Vertical
*	17235.0	36.3	16.4	52.7	88.2	-35.5	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9355.5	35.9	13.5	49.4	74.0	-24.6	Peak	Horizontal
	10800.5	35.4	15.2	50.6	74.0	-23.4	Peak	Horizontal
*	14804.0	36.1	16.1	52.2	88.2	-36.0	Peak	Horizontal
*	17566.5	36.5	19.3	55.8	88.2	-32.4	Peak	Horizontal
	9381.0	35.8	13.6	49.4	74.0	-24.6	Peak	Vertical
	11489.0	35.8	14.6	50.4	74.0	-23.6	Peak	Vertical
*	14974.0	37.1	15.6	52.7	88.2	-35.5	Peak	Vertical
*	17413.5	36.4	17.9	54.3	88.2	-33.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9406.5	35.3	13.6	48.9	74.0	-25.1	Peak	Horizontal
	11497.5	35.7	14.7	50.4	74.0	-23.6	Peak	Horizontal
*	14243.0	35.8	16.5	52.3	88.2	-35.9	Peak	Horizontal
*	17396.5	36.2	17.7	53.9	88.2	-34.3	Peak	Horizontal
	9381.0	35.5	13.6	49.1	74.0	-24.9	Peak	Vertical
	11055.5	35.6	15.2	50.8	74.0	-23.2	Peak	Vertical
*	14770.0	35.8	16.4	52.2	88.2	-36.0	Peak	Vertical
*	17464.5	35.5	18.4	53.9	88.2	-34.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9389.5	36.0	13.4	49.4	74.0	-24.6	Peak	Horizontal
	10970.5	34.8	15.3	50.1	74.0	-23.9	Peak	Horizontal
*	14693.5	35.9	16.5	52.4	88.2	-35.8	Peak	Horizontal
*	17405.0	35.8	17.8	53.6	88.2	-34.6	Peak	Horizontal
	9381.0	35.4	13.6	49.0	74.0	-25.0	Peak	Vertical
	11735.5	36.7	13.8	50.5	74.0	-23.5	Peak	Vertical
*	14183.5	36.3	16.1	52.4	88.2	-35.8	Peak	Vertical
*	17541.0	35.8	18.8	54.6	88.2	-33.6	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE160	Test Channel	111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9100.5	35.1	12.2	47.3	74.0	-26.7	Peak	Horizontal
	11166.0	35.7	14.8	50.5	74.0	-23.5	Peak	Horizontal
*	14829.5	36.1	16.0	52.1	88.2	-36.1	Peak	Horizontal
*	17447.5	36.3	18.1	54.4	88.2	-33.8	Peak	Horizontal
	9381.0	34.4	13.6	48.0	74.0	-26.0	Peak	Vertical
	11438.0	35.6	15.0	50.6	74.0	-23.4	Peak	Vertical
*	14889.0	36.2	16.1	52.3	88.2	-35.9	Peak	Vertical
*	17558.0	35.0	19.3	54.3	88.2	-33.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9092.0	35.0	12.1	47.1	74.0	-26.9	Peak	Horizontal
	11123.5	36.0	14.8	50.8	74.0	-23.2	Peak	Horizontal
*	14753.0	36.0	16.3	52.3	88.2	-35.9	Peak	Horizontal
*	17456.0	35.9	18.3	54.2	88.2	-34.0	Peak	Horizontal
	9347.0	35.1	13.4	48.5	74.0	-25.5	Peak	Vertical
	10894.0	35.9	15.0	50.9	74.0	-23.1	Peak	Vertical
*	14200.5	35.7	16.2	51.9	88.2	-36.3	Peak	Vertical
*	17498.5	35.3	18.9	54.2	88.2	-34.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE160	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9177.0	36.4	12.9	49.3	74.0	-24.7	Peak	Horizontal
	11302.0	36.2	14.7	50.9	74.0	-23.1	Peak	Horizontal
*	14761.5	36.1	16.4	52.5	88.2	-35.7	Peak	Horizontal
*	17583.5	34.7	19.5	54.2	88.2	-34.0	Peak	Horizontal
	9355.5	36.0	13.5	49.5	74.0	-24.5	Peak	Vertical
	11489.0	36.1	14.6	50.7	74.0	-23.3	Peak	Vertical
*	14022.0	36.6	15.6	52.2	88.2	-36.0	Peak	Vertical
*	17634.5	35.5	20.2	55.7	88.2	-32.5	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11ax-HE160	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9466.0	36.0	13.6	49.6	74.0	-24.4	Peak	Horizontal
	11506.0	35.7	14.9	50.6	74.0	-23.4	Peak	Horizontal
*	14413.0	36.2	16.4	52.6	88.2	-35.6	Peak	Horizontal
*	17515.5	35.8	18.8	54.6	88.2	-33.6	Peak	Horizontal
	9015.5	35.5	12.0	47.5	74.0	-26.5	Peak	Vertical
	10962.0	35.5	15.2	50.7	74.0	-23.3	Peak	Vertical
*	14659.5	36.3	16.1	52.4	88.2	-35.8	Peak	Vertical
*	17464.5	35.1	18.4	53.5	88.2	-34.7	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9134.5	34.6	12.3	46.9	74.0	-27.1	Peak	Horizontal
	10792.0	35.2	15.3	50.5	74.0	-23.5	Peak	Horizontal
*	14200.5	36.3	16.2	52.5	88.2	-35.7	Peak	Horizontal
*	17362.5	36.4	17.1	53.5	88.2	-34.7	Peak	Horizontal
	9466.0	35.7	13.6	49.3	74.0	-24.7	Peak	Vertical
	11132.0	36.3	14.6	50.9	74.0	-23.1	Peak	Vertical
*	14464.0	36.1	16.5	52.6	88.2	-35.6	Peak	Vertical
*	17447.5	36.0	18.1	54.1	88.2	-34.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9381.0	33.9	13.6	47.5	74.0	-26.5	Peak	Horizontal
	11514.5	36.0	14.8	50.8	74.0	-23.2	Peak	Horizontal
*	14566.0	36.4	16.4	52.8	88.2	-35.4	Peak	Horizontal
*	17498.5	35.2	18.9	54.1	88.2	-34.1	Peak	Horizontal
	9457.5	36.1	13.5	49.6	74.0	-24.4	Peak	Vertical
	11506.0	35.5	14.9	50.4	74.0	-23.6	Peak	Vertical
*	14362.0	36.0	16.7	52.7	88.2	-35.5	Peak	Vertical
*	17498.5	35.2	18.9	54.1	88.2	-34.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9381.0	35.4	13.6	49.0	74.0	-25.0	Peak	Horizontal
	11472.0	35.9	14.8	50.7	74.0	-23.3	Peak	Horizontal
*	14251.5	36.1	16.5	52.6	88.2	-35.6	Peak	Horizontal
*	17583.5	35.0	19.5	54.5	88.2	-33.7	Peak	Horizontal
	9466.0	35.4	13.6	49.0	74.0	-25.0	Peak	Vertical
	11514.5	35.6	14.8	50.4	74.0	-23.6	Peak	Vertical
*	14753.0	35.4	16.3	51.7	88.2	-36.5	Peak	Vertical
*	17286.0	35.6	16.4	52.0	88.2	-36.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT20	Test Channel	97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9389.5	34.7	13.4	48.1	74.0	-25.9	Peak	Horizontal
	11021.5	35.4	15.3	50.7	74.0	-23.3	Peak	Horizontal
*	14753.0	36.1	16.3	52.4	88.2	-35.8	Peak	Horizontal
*	17694.0	35.7	20.0	55.7	88.2	-32.5	Peak	Horizontal
	9423.5	35.1	13.6	48.7	74.0	-25.3	Peak	Vertical
	11599.5	35.7	14.4	50.1	74.0	-23.9	Peak	Vertical
*	14404.5	36.4	16.5	52.9	88.2	-35.3	Peak	Vertical
*	17566.5	35.3	19.3	54.6	88.2	-33.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT20	Test Channel	105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9109.0	36.0	12.3	48.3	74.0	-25.7	Peak	Horizontal
	11021.5	35.3	15.3	50.6	74.0	-23.4	Peak	Horizontal
*	14387.5	35.5	16.6	52.1	88.2	-36.1	Peak	Horizontal
*	17507.0	35.0	18.9	53.9	88.2	-34.3	Peak	Horizontal
	9432.0	36.1	13.5	49.6	74.0	-24.4	Peak	Vertical
	10928.0	35.4	15.4	50.8	74.0	-23.2	Peak	Vertical
*	14362.0	35.7	16.7	52.4	88.2	-35.8	Peak	Vertical
*	17643.0	35.4	20.5	55.9	88.2	-32.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT20	Test Channel	113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9432.0	36.0	13.5	49.5	74.0	-24.5	Peak	Horizontal
	11259.5	36.2	14.6	50.8	74.0	-23.2	Peak	Horizontal
*	14345.0	36.0	16.5	52.5	88.2	-35.7	Peak	Horizontal
*	17617.5	35.9	19.4	55.3	88.2	-32.9	Peak	Horizontal
	9415.0	35.5	13.7	49.2	74.0	-24.8	Peak	Vertical
	11837.5	37.4	13.6	51.0	74.0	-23.0	Peak	Vertical
*	14625.5	35.3	16.7	52.0	88.2	-36.2	Peak	Vertical
*	17626.0	35.0	19.7	54.7	88.2	-33.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9423.5	35.6	13.6	49.2	74.0	-24.8	Peak	Horizontal
	10860.0	35.5	15.3	50.8	74.0	-23.2	Peak	Horizontal
*	14294.0	35.9	16.4	52.3	88.2	-35.9	Peak	Horizontal
*	17617.5	35.3	19.4	54.7	88.2	-33.5	Peak	Horizontal
	9466.0	34.5	13.6	48.1	74.0	-25.9	Peak	Vertical
	10843.0	35.6	15.2	50.8	74.0	-23.2	Peak	Vertical
*	14251.5	35.8	16.5	52.3	88.2	-35.9	Peak	Vertical
*	17549.5	35.0	19.1	54.1	88.2	-34.1	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9389.5	34.8	13.4	48.2	74.0	-25.8	Peak	Horizontal
	10902.5	35.6	15.1	50.7	74.0	-23.3	Peak	Horizontal
*	14753.0	36.0	16.3	52.3	88.2	-35.9	Peak	Horizontal
*	17515.5	35.1	18.8	53.9	88.2	-34.3	Peak	Horizontal
	9151.5	35.4	12.5	47.9	74.0	-26.1	Peak	Vertical
	11030.0	35.4	15.4	50.8	74.0	-23.2	Peak	Vertical
*	14285.5	36.4	16.4	52.8	88.2	-35.4	Peak	Vertical
*	17524.0	35.2	18.6	53.8	88.2	-34.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9389.5	36.3	13.4	49.7	74.0	-24.3	Peak	Horizontal
	11404.0	35.9	14.8	50.7	74.0	-23.3	Peak	Horizontal
*	14345.0	36.0	16.5	52.5	88.2	-35.7	Peak	Horizontal
*	17430.5	36.3	18.0	54.3	88.2	-33.9	Peak	Horizontal
	9415.0	36.2	13.7	49.9	74.0	-24.1	Peak	Vertical
	10860.0	35.7	15.3	51.0	74.0	-23.0	Peak	Vertical
*	14770.0	35.9	16.4	52.3	88.2	-35.9	Peak	Vertical
*	17634.5	35.4	20.2	55.6	88.2	-32.6	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT20	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9389.5	34.5	13.4	47.9	74.0	-26.1	Peak	Horizontal
	10902.5	35.1	15.1	50.2	74.0	-23.8	Peak	Horizontal
*	14183.5	35.5	16.1	51.6	88.2	-36.6	Peak	Horizontal
*	17507.0	34.8	18.9	53.7	88.2	-34.5	Peak	Horizontal
	9415.0	35.0	13.7	48.7	74.0	-25.3	Peak	Vertical
	11557.0	35.7	14.7	50.4	74.0	-23.6	Peak	Vertical
*	14294.0	35.8	16.4	52.2	88.2	-36.0	Peak	Vertical
*	17549.5	35.3	19.1	54.4	88.2	-33.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT20	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9406.5	35.3	13.6	48.9	74.0	-25.1	Peak	Horizontal
	10860.0	35.6	15.3	50.9	74.0	-23.1	Peak	Horizontal
*	14668.0	36.2	16.1	52.3	88.2	-35.9	Peak	Horizontal
*	17634.5	34.7	20.2	54.9	88.2	-33.3	Peak	Horizontal
	9389.5	34.7	13.4	48.1	74.0	-25.9	Peak	Vertical
	10843.0	35.6	15.2	50.8	74.0	-23.2	Peak	Vertical
*	14778.5	35.8	16.4	52.2	88.2	-36.0	Peak	Vertical
*	17634.5	34.6	20.2	54.8	88.2	-33.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT20	Test Channel	213
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9083.5	35.6	12.1	47.7	74.0	-26.3	Peak	Horizontal
	11514.5	36.0	14.8	50.8	74.0	-23.2	Peak	Horizontal
*	14319.5	35.9	16.5	52.4	88.2	-35.8	Peak	Horizontal
*	17515.5	35.3	18.8	54.1	88.2	-34.1	Peak	Horizontal
	9449.0	35.4	13.4	48.8	74.0	-25.2	Peak	Vertical
	10911.0	35.4	15.4	50.8	74.0	-23.2	Peak	Vertical
*	14685.0	36.2	16.5	52.7	88.2	-35.5	Peak	Vertical
*	17481.5	35.0	18.6	53.6	88.2	-34.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT20	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9083.5	35.4	12.1	47.5	74.0	-26.5	Peak	Horizontal
	11123.5	36.0	14.8	50.8	74.0	-23.2	Peak	Horizontal
*	14047.5	36.9	15.5	52.4	88.2	-35.8	Peak	Horizontal
*	17634.5	35.3	20.2	55.5	88.2	-32.7	Peak	Horizontal
	9364.0	35.9	13.5	49.4	74.0	-24.6	Peak	Vertical
	11472.0	35.9	14.8	50.7	74.0	-23.3	Peak	Vertical
*	14464.0	36.9	16.5	53.4	88.2	-34.8	Peak	Vertical
*	17583.5	36.0	19.5	55.5	88.2	-32.7	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9109.0	34.9	12.3	47.2	74.0	-26.8	Peak	Horizontal
	11259.5	36.0	14.6	50.6	74.0	-23.4	Peak	Horizontal
*	14685.0	35.5	16.5	52.0	88.2	-36.2	Peak	Horizontal
*	17396.5	34.9	17.7	52.6	88.2	-35.6	Peak	Horizontal
	9092.0	34.6	12.1	46.7	74.0	-27.3	Peak	Vertical
	10911.0	35.4	15.4	50.8	74.0	-23.2	Peak	Vertical
*	14090.0	36.5	15.8	52.3	88.2	-35.9	Peak	Vertical
*	17405.0	35.0	17.8	52.8	88.2	-35.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9398.0	35.9	13.4	49.3	74.0	-24.7	Peak	Horizontal
	11863.0	36.7	13.5	50.2	74.0	-23.8	Peak	Horizontal
*	14931.5	36.5	15.5	52.0	88.2	-36.2	Peak	Horizontal
*	17311.5	36.0	16.7	52.7	88.2	-35.5	Peak	Horizontal
	9466.0	35.6	13.6	49.2	74.0	-24.8	Peak	Vertical
	11183.0	36.2	14.8	51.0	74.0	-23.0	Peak	Vertical
*	14302.5	35.9	16.4	52.3	88.2	-35.9	Peak	Vertical
*	17609.0	35.3	19.2	54.5	88.2	-33.7	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9100.5	36.4	12.2	48.6	74.0	-25.4	Peak	Horizontal
	11055.5	35.5	15.2	50.7	74.0	-23.3	Peak	Horizontal
*	14200.5	35.8	16.2	52.0	88.2	-36.2	Peak	Horizontal
*	17473.0	35.4	18.4	53.8	88.2	-34.4	Peak	Horizontal
	9185.5	35.9	12.8	48.7	74.0	-25.3	Peak	Vertical
	11548.5	36.0	14.7	50.7	74.0	-23.3	Peak	Vertical
*	14795.5	36.0	16.2	52.2	88.2	-36.0	Peak	Vertical
*	17524.0	35.4	18.6	54.0	88.2	-34.2	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT40	Test Channel	99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9126.0	36.0	12.2	48.2	74.0	-25.8	Peak	Horizontal
	11072.5	34.3	15.1	49.4	74.0	-24.6	Peak	Horizontal
*	14251.5	36.0	16.5	52.5	88.2	-35.7	Peak	Horizontal
*	17243.5	36.3	16.3	52.6	88.2	-35.6	Peak	Horizontal
	9109.0	35.8	12.3	48.1	74.0	-25.9	Peak	Vertical
	11429.5	36.0	14.8	50.8	74.0	-23.2	Peak	Vertical
*	14787.0	36.3	16.3	52.6	88.2	-35.6	Peak	Vertical
*	17498.5	36.6	18.9	55.5	88.2	-32.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT40	Test Channel	107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9058.0	36.5	12.0	48.5	74.0	-25.5	Peak	Horizontal
	11633.5	34.9	14.4	49.3	74.0	-24.7	Peak	Horizontal
*	14251.5	36.4	16.5	52.9	88.2	-35.3	Peak	Horizontal
*	17558.0	35.6	19.3	54.9	88.2	-33.3	Peak	Horizontal
	9415.0	35.4	13.7	49.1	74.0	-24.9	Peak	Vertical
	10987.5	35.4	15.4	50.8	74.0	-23.2	Peak	Vertical
*	14821.0	35.6	16.1	51.7	88.2	-36.5	Peak	Vertical
*	17498.5	35.1	18.9	54.0	88.2	-34.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT40	Test Channel	115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9415.0	35.2	13.7	48.9	74.0	-25.1	Peak	Horizontal
	11004.5	35.2	15.3	50.5	74.0	-23.5	Peak	Horizontal
*	14447.0	36.3	16.6	52.9	88.2	-35.3	Peak	Horizontal
*	17507.0	35.4	18.9	54.3	88.2	-33.9	Peak	Horizontal
	9194.0	36.5	12.7	49.2	74.0	-24.8	Peak	Vertical
	11514.5	36.0	14.8	50.8	74.0	-23.2	Peak	Vertical
*	14192.0	35.9	16.3	52.2	88.2	-36.0	Peak	Vertical
*	17558.0	35.1	19.3	54.4	88.2	-33.8	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9466.0	36.4	13.6	50.0	74.0	-24.0	Peak	Horizontal
	11480.5	36.2	14.7	50.9	74.0	-23.1	Peak	Horizontal
*	14770.0	35.5	16.4	51.9	88.2	-36.3	Peak	Horizontal
*	17558.0	35.5	19.3	54.8	88.2	-33.4	Peak	Horizontal
	9109.0	34.7	12.3	47.0	74.0	-27.0	Peak	Vertical
	10936.5	35.0	15.3	50.3	74.0	-23.7	Peak	Vertical
*	14328.0	35.5	16.5	52.0	88.2	-36.2	Peak	Vertical
*	17634.5	34.9	20.2	55.1	88.2	-33.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9126.0	35.3	12.2	47.5	74.0	-26.5	Peak	Horizontal
	11548.5	35.4	14.7	50.1	74.0	-23.9	Peak	Horizontal
*	14421.5	37.0	16.3	53.3	88.2	-34.9	Peak	Horizontal
*	17592.0	35.4	19.4	54.8	88.2	-33.4	Peak	Horizontal
	9134.5	34.7	12.3	47.0	74.0	-27.0	Peak	Vertical
	11446.5	36.0	14.9	50.9	74.0	-23.1	Peak	Vertical
*	14022.0	36.1	15.6	51.7	88.2	-36.5	Peak	Vertical
*	17583.5	35.9	19.5	55.4	88.2	-32.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9457.5	35.2	13.5	48.7	74.0	-25.3	Peak	Horizontal
	11514.5	35.9	14.8	50.7	74.0	-23.3	Peak	Horizontal
*	14345.0	35.9	16.5	52.4	88.2	-35.8	Peak	Horizontal
*	17558.0	34.9	19.3	54.2	88.2	-34.0	Peak	Horizontal
	9381.0	34.4	13.6	48.0	74.0	-26.0	Peak	Vertical
	11463.5	35.8	14.8	50.6	74.0	-23.4	Peak	Vertical
*	14370.5	36.0	16.6	52.6	88.2	-35.6	Peak	Vertical
*	17388.0	35.1	17.5	52.6	88.2	-35.6	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT40	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9160.0	36.8	12.6	49.4	74.0	-24.6	Peak	Horizontal
	11506.0	35.6	14.9	50.5	74.0	-23.5	Peak	Horizontal
*	14855.0	35.6	16.3	51.9	88.2	-36.3	Peak	Horizontal
*	17541.0	35.6	18.8	54.4	88.2	-33.8	Peak	Horizontal
	9398.0	34.1	13.4	47.5	74.0	-26.5	Peak	Vertical
	11514.5	36.0	14.8	50.8	74.0	-23.2	Peak	Vertical
*	14345.0	35.8	16.5	52.3	88.2	-35.9	Peak	Vertical
*	17558.0	34.6	19.3	53.9	88.2	-34.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT40	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9347.0	35.9	13.4	49.3	74.0	-24.7	Peak	Horizontal
	11123.5	35.8	14.8	50.6	74.0	-23.4	Peak	Horizontal
*	14770.0	35.9	16.4	52.3	88.2	-35.9	Peak	Horizontal
*	17558.0	34.3	19.3	53.6	88.2	-34.6	Peak	Horizontal
	9415.0	35.0	13.7	48.7	74.0	-25.3	Peak	Vertical
	11191.5	35.9	14.8	50.7	74.0	-23.3	Peak	Vertical
*	14311.0	35.4	16.4	51.8	88.2	-36.4	Peak	Vertical
*	17634.5	35.3	20.2	55.5	88.2	-32.7	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a "conversion" factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT40	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9109.0	35.8	12.3	48.1	74.0	-25.9	Peak	Horizontal
	11463.5	36.1	14.8	50.9	74.0	-23.1	Peak	Horizontal
*	14872.0	36.2	16.3	52.5	88.2	-35.7	Peak	Horizontal
*	17634.5	35.3	20.2	55.5	88.2	-32.7	Peak	Horizontal
	9449.0	35.2	13.4	48.6	74.0	-25.4	Peak	Vertical
	11531.5	36.0	14.7	50.7	74.0	-23.3	Peak	Vertical
*	14693.5	36.5	16.5	53.0	88.2	-35.2	Peak	Vertical
*	17549.5	34.7	19.1	53.8	88.2	-34.4	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT40	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9432.0	35.8	13.5	49.3	74.0	-24.7	Peak	Horizontal
	11659.0	36.6	14.2	50.8	74.0	-23.2	Peak	Horizontal
*	13979.5	36.0	15.4	51.4	88.2	-36.8	Peak	Horizontal
*	17320.0	34.9	16.9	51.8	88.2	-36.4	Peak	Horizontal
	9466.0	35.8	13.6	49.4	74.0	-24.6	Peak	Vertical
	11463.5	35.7	14.8	50.5	74.0	-23.5	Peak	Vertical
*	14889.0	36.6	16.1	52.7	88.2	-35.5	Peak	Vertical
*	17566.5	35.8	19.3	55.1	88.2	-33.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9100.5	34.0	12.2	46.2	74.0	-27.8	Peak	Horizontal
	11472.0	36.0	14.8	50.8	74.0	-23.2	Peak	Horizontal
*	14413.0	36.1	16.4	52.5	88.2	-35.7	Peak	Horizontal
*	17558.0	35.3	19.3	54.6	88.2	-33.6	Peak	Horizontal
	9126.0	36.5	12.2	48.7	74.0	-25.3	Peak	Vertical
	11123.5	35.4	14.8	50.2	74.0	-23.8	Peak	Vertical
*	14761.5	36.6	16.4	53.0	88.2	-35.2	Peak	Vertical
*	17464.5	34.9	18.4	53.3	88.2	-34.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9432.0	34.4	13.5	47.9	74.0	-26.1	Peak	Horizontal
	11013.0	35.5	15.3	50.8	74.0	-23.2	Peak	Horizontal
*	14243.0	36.1	16.5	52.6	88.2	-35.6	Peak	Horizontal
*	17498.5	35.3	18.9	54.2	88.2	-34.0	Peak	Horizontal
	9109.0	34.8	12.3	47.1	74.0	-26.9	Peak	Vertical
	11217.0	35.7	14.7	50.4	74.0	-23.6	Peak	Vertical
*	14447.0	36.2	16.6	52.8	88.2	-35.4	Peak	Vertical
*	17549.5	35.2	19.1	54.3	88.2	-33.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9389.5	34.5	13.4	47.9	74.0	-26.1	Peak	Horizontal
	11174.5	35.9	14.8	50.7	74.0	-23.3	Peak	Horizontal
*	14761.5	35.7	16.4	52.1	88.2	-36.1	Peak	Horizontal
*	17337.0	35.5	17.0	52.5	88.2	-35.7	Peak	Horizontal
	9032.5	36.3	12.0	48.3	74.0	-25.7	Peak	Vertical
	12186.0	37.0	13.7	50.7	74.0	-23.3	Peak	Vertical
*	14345.0	35.8	16.5	52.3	88.2	-35.9	Peak	Vertical
*	17371.0	35.6	17.3	52.9	88.2	-35.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT80	Test Channel	103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9423.5	34.7	13.6	48.3	74.0	-25.7	Peak	Horizontal
	10851.5	35.6	15.2	50.8	74.0	-23.2	Peak	Horizontal
*	13911.5	38.0	15.5	53.5	88.2	-34.7	Peak	Horizontal
*	17456.0	35.5	18.3	53.8	88.2	-34.4	Peak	Horizontal
	9415.0	35.9	13.7	49.6	74.0	-24.4	Peak	Vertical
	11548.5	36.1	14.7	50.8	74.0	-23.2	Peak	Vertical
*	14022.0	37.0	15.6	52.6	88.2	-35.6	Peak	Vertical
*	17320.0	35.8	16.9	52.7	88.2	-35.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT80	Test Channel	119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9381.0	35.3	13.6	48.9	74.0	-25.1	Peak	Horizontal
	10826.0	35.7	15.1	50.8	74.0	-23.2	Peak	Horizontal
*	14897.5	36.0	15.9	51.9	88.2	-36.3	Peak	Horizontal
*	17626.0	35.3	19.7	55.0	88.2	-33.2	Peak	Horizontal
	9160.0	36.5	12.6	49.1	74.0	-24.9	Peak	Vertical
	10732.5	35.7	15.2	50.9	74.0	-23.1	Peak	Vertical
*	14872.0	36.1	16.3	52.4	88.2	-35.8	Peak	Vertical
*	17626.0	35.2	19.7	54.9	88.2	-33.3	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9117.5	35.7	12.3	48.0	74.0	-26.0	Peak	Horizontal
	11395.5	35.8	14.8	50.6	74.0	-23.4	Peak	Horizontal
*	14421.5	36.0	16.3	52.3	88.2	-35.9	Peak	Horizontal
*	17634.5	34.2	20.2	54.4	88.2	-33.8	Peak	Horizontal
	9423.5	35.3	13.6	48.9	74.0	-25.1	Peak	Vertical
	11557.0	35.7	14.7	50.4	74.0	-23.6	Peak	Vertical
*	14183.5	35.8	16.1	51.9	88.2	-36.3	Peak	Vertical
*	17473.0	34.6	18.4	53.0	88.2	-35.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9381.0	34.5	13.6	48.1	74.0	-25.9	Peak	Horizontal
	11472.0	36.0	14.8	50.8	74.0	-23.2	Peak	Horizontal
*	14251.5	35.8	16.5	52.3	88.2	-35.9	Peak	Horizontal
*	17609.0	36.1	19.2	55.3	88.2	-32.9	Peak	Horizontal
	9381.0	35.1	13.6	48.7	74.0	-25.3	Peak	Vertical
	11123.5	36.2	14.8	51.0	74.0	-23.0	Peak	Vertical
*	14889.0	36.1	16.1	52.2	88.2	-36.0	Peak	Vertical
*	16784.5	36.4	14.9	51.3	88.2	-36.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9075.0	35.7	12.3	48.0	74.0	-26.0	Peak	Horizontal
	11055.5	35.7	15.2	50.9	74.0	-23.1	Peak	Horizontal
*	14778.5	36.0	16.4	52.4	88.2	-35.8	Peak	Horizontal
*	17634.5	35.2	20.2	55.4	88.2	-32.8	Peak	Horizontal
	9423.5	34.3	13.6	47.9	74.0	-26.1	Peak	Vertical
	11327.5	36.1	14.5	50.6	74.0	-23.4	Peak	Vertical
*	14761.5	36.3	16.4	52.7	88.2	-35.5	Peak	Vertical
*	17507.0	35.1	18.9	54.0	88.2	-34.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT80	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9381.0	34.0	13.6	47.6	74.0	-26.4	Peak	Horizontal
	11659.0	36.4	14.2	50.6	74.0	-23.4	Peak	Horizontal
*	14404.5	36.6	16.5	53.1	88.2	-35.1	Peak	Horizontal
*	17337.0	34.8	17.0	51.8	88.2	-36.4	Peak	Horizontal
	9423.5	35.1	13.6	48.7	74.0	-25.3	Peak	Vertical
	10894.0	35.9	15.0	50.9	74.0	-23.1	Peak	Vertical
*	14243.0	35.6	16.5	52.1	88.2	-36.1	Peak	Vertical
*	17413.5	33.2	17.9	51.1	88.2	-37.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT80	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9364.0	35.8	13.5	49.3	74.0	-24.7	Peak	Horizontal
	10715.5	35.9	15.2	51.1	74.0	-22.9	Peak	Horizontal
*	14277.0	35.6	16.4	52.0	88.2	-36.2	Peak	Horizontal
*	17634.5	34.4	20.2	54.6	88.2	-33.6	Peak	Horizontal
	9134.5	34.5	12.3	46.8	74.0	-27.2	Peak	Vertical
	10843.0	35.5	15.2	50.7	74.0	-23.3	Peak	Vertical
*	14464.0	36.0	16.5	52.5	88.2	-35.7	Peak	Vertical
*	17413.5	34.2	17.9	52.1	88.2	-36.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT80	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9134.5	34.7	12.3	47.0	74.0	-27.0	Peak	Horizontal
	10970.5	35.2	15.3	50.5	74.0	-23.5	Peak	Horizontal
*	14268.5	36.0	16.4	52.4	88.2	-35.8	Peak	Horizontal
*	17490.0	34.5	18.8	53.3	88.2	-34.9	Peak	Horizontal
	9423.5	35.1	13.6	48.7	74.0	-25.3	Peak	Vertical
	11548.5	35.8	14.7	50.5	74.0	-23.5	Peak	Vertical
*	14404.5	35.7	16.5	52.2	88.2	-36.0	Peak	Vertical
*	17558.0	35.8	19.3	55.1	88.2	-33.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9432.0	36.0	13.5	49.5	74.0	-24.5	Peak	Horizontal
	11021.5	35.7	15.3	51.0	74.0	-23.0	Peak	Horizontal
*	13954.0	36.6	15.4	52.0	88.2	-36.2	Peak	Horizontal
*	17634.5	34.3	20.2	54.5	88.2	-33.7	Peak	Horizontal
	9457.5	35.6	13.5	49.1	74.0	-24.9	Peak	Vertical
	11523.0	36.1	14.7	50.8	74.0	-23.2	Peak	Vertical
*	14183.5	36.2	16.1	52.3	88.2	-35.9	Peak	Vertical
*	17592.0	35.5	19.4	54.9	88.2	-33.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9381.0	35.3	13.6	48.9	74.0	-25.1	Peak	Horizontal
	11531.5	35.5	14.7	50.2	74.0	-23.8	Peak	Horizontal
*	14353.5	36.1	16.6	52.7	88.2	-35.5	Peak	Horizontal
*	17558.0	35.1	19.3	54.4	88.2	-33.8	Peak	Horizontal
	9406.5	35.5	13.6	49.1	74.0	-24.9	Peak	Vertical
	11795.0	35.7	13.6	49.3	74.0	-24.7	Peak	Vertical
*	14523.5	36.7	16.6	53.3	88.2	-34.9	Peak	Vertical
*	17558.0	34.3	19.3	53.6	88.2	-34.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9423.5	33.9	13.6	47.5	74.0	-26.5	Peak	Horizontal
	11293.5	36.2	14.7	50.9	74.0	-23.1	Peak	Horizontal
*	14200.5	36.5	16.2	52.7	88.2	-35.5	Peak	Horizontal
*	17634.5	34.7	20.2	54.9	88.2	-33.3	Peak	Horizontal
	9338.5	35.9	13.4	49.3	74.0	-24.7	Peak	Vertical
	11557.0	36.2	14.7	50.9	74.0	-23.1	Peak	Vertical
*	14183.5	36.3	16.1	52.4	88.2	-35.8	Peak	Vertical
*	17430.5	35.6	18.0	53.6	88.2	-34.6	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT160	Test Channel	111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9117.5	36.0	12.3	48.3	74.0	-25.7	Peak	Horizontal
	11489.0	36.3	14.6	50.9	74.0	-23.1	Peak	Horizontal
*	14260.0	35.9	16.4	52.3	88.2	-35.9	Peak	Horizontal
*	17456.0	35.1	18.3	53.4	88.2	-34.8	Peak	Horizontal
	9381.0	34.8	13.6	48.4	74.0	-25.6	Peak	Vertical
	11455.0	36.1	14.8	50.9	74.0	-23.1	Peak	Vertical
*	14396.0	35.8	16.6	52.4	88.2	-35.8	Peak	Vertical
*	17507.0	34.4	18.9	53.3	88.2	-34.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9423.5	35.5	13.6	49.1	74.0	-24.9	Peak	Horizontal
	11514.5	35.9	14.8	50.7	74.0	-23.3	Peak	Horizontal
*	14243.0	35.7	16.5	52.2	88.2	-36.0	Peak	Horizontal
*	17592.0	36.0	19.4	55.4	88.2	-32.8	Peak	Horizontal
	9423.5	34.5	13.6	48.1	74.0	-25.9	Peak	Vertical
	11854.5	36.4	13.6	50.0	74.0	-24.0	Peak	Vertical
*	14404.5	35.5	16.5	52.0	88.2	-36.2	Peak	Vertical
*	17634.5	34.9	20.2	55.1	88.2	-33.1	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT160	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9432.0	35.4	13.5	48.9	74.0	-25.1	Peak	Horizontal
	11208.5	34.3	14.8	49.1	74.0	-24.9	Peak	Horizontal
*	14362.0	35.1	16.7	51.8	88.2	-36.4	Peak	Horizontal
*	17634.5	34.6	20.2	54.8	88.2	-33.4	Peak	Horizontal
	9406.5	35.7	13.6	49.3	74.0	-24.7	Peak	Vertical
	10877.0	35.2	15.3	50.5	74.0	-23.5	Peak	Vertical
*	14396.0	35.8	16.6	52.4	88.2	-35.8	Peak	Vertical
*	17507.0	36.1	18.9	55.0	88.2	-33.2	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT160	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9457.5	35.5	13.5	49.0	74.0	-25.0	Peak	Horizontal
	11480.5	35.9	14.7	50.6	74.0	-23.4	Peak	Horizontal
*	14183.5	35.6	16.1	51.7	88.2	-36.5	Peak	Horizontal
*	17464.5	35.8	18.4	54.2	88.2	-34.0	Peak	Horizontal
	9117.5	36.6	12.3	48.9	74.0	-25.1	Peak	Vertical
	11761.0	37.0	13.5	50.5	74.0	-23.5	Peak	Vertical
*	14243.0	36.1	16.5	52.6	88.2	-35.6	Peak	Vertical
*	17464.5	35.8	18.4	54.2	88.2	-34.0	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT320-1	Test Channel	31
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9338.5	33.8	13.4	47.2	74.0	-26.8	Peak	Horizontal
	11582.5	35.9	14.4	50.3	74.0	-23.7	Peak	Horizontal
*	14829.5	36.0	16.0	52.0	88.2	-36.2	Peak	Horizontal
*	17507.0	34.8	18.9	53.7	88.2	-34.5	Peak	Horizontal
	9092.0	34.5	12.1	46.6	74.0	-27.4	Peak	Vertical
	10800.5	35.5	15.2	50.7	74.0	-23.3	Peak	Vertical
*	14175.0	35.5	16.0	51.5	88.2	-36.7	Peak	Vertical
*	17388.0	35.1	17.5	52.6	88.2	-35.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT320-1	Test Channel	95
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9466.0	35.8	13.6	49.4	74.0	-24.6	Peak	Horizontal
	10826.0	35.7	15.1	50.8	74.0	-23.2	Peak	Horizontal
*	14889.0	36.4	16.1	52.5	88.2	-35.7	Peak	Horizontal
*	17617.5	37.0	19.4	56.4	88.2	-31.8	Peak	Horizontal
	9423.5	34.1	13.6	47.7	74.0	-26.3	Peak	Vertical
	11200.0	35.9	14.8	50.7	74.0	-23.3	Peak	Vertical
*	14761.5	35.3	16.4	51.7	88.2	-36.5	Peak	Vertical
*	17634.5	34.5	20.2	54.7	88.2	-33.5	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT320-1	Test Channel	159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9406.5	34.6	13.6	48.2	74.0	-25.8	Peak	Horizontal
	10936.5	35.6	15.3	50.9	74.0	-23.1	Peak	Horizontal
*	14209.0	36.5	16.2	52.7	88.2	-35.5	Peak	Horizontal
*	17549.5	35.2	19.1	54.3	88.2	-33.9	Peak	Horizontal
	9160.0	34.8	12.6	47.4	74.0	-26.6	Peak	Vertical
	11200.0	35.7	14.8	50.5	74.0	-23.5	Peak	Vertical
*	14285.5	35.6	16.4	52.0	88.2	-36.2	Peak	Vertical
*	17643.0	34.9	20.5	55.4	88.2	-32.8	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT320-2	Test Channel	63
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9457.5	35.6	13.5	49.1	74.0	-24.9	Peak	Horizontal
	10945.0	35.4	15.3	50.7	74.0	-23.3	Peak	Horizontal
*	14251.5	36.0	16.5	52.5	88.2	-35.7	Peak	Horizontal
*	17558.0	35.6	19.3	54.9	88.2	-33.3	Peak	Horizontal
	9355.5	35.5	13.5	49.0	74.0	-25.0	Peak	Vertical
	11633.5	36.3	14.4	50.7	74.0	-23.3	Peak	Vertical
*	14583.0	36.0	16.5	52.5	88.2	-35.7	Peak	Vertical
*	17447.5	34.5	18.1	52.6	88.2	-35.6	Peak	Vertical
<p>Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.</p> <p>Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)</p> <p>Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)</p>								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT320-2	Test Channel	127
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9381.0	34.0	13.6	47.6	74.0	-26.4	Peak	Horizontal
	11455.0	35.6	14.8	50.4	74.0	-23.6	Peak	Horizontal
*	14744.5	35.9	16.3	52.2	88.2	-36.0	Peak	Horizontal
*	17549.5	35.9	19.1	55.0	88.2	-33.2	Peak	Horizontal
	9457.5	35.4	13.5	48.9	74.0	-25.1	Peak	Vertical
	11565.5	35.9	14.5	50.4	74.0	-23.6	Peak	Vertical
*	14617.0	35.6	16.6	52.2	88.2	-36.0	Peak	Vertical
*	17490.0	34.5	18.8	53.3	88.2	-34.9	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Product	ACCESS POINT	Test Engineer	Dick Shen
Test Site	WZ-AC1	Test Date	2024-05-12
Test Mode	802.11be-EHT320-2	Test Channel	191
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
	9406.5	33.4	13.6	47.0	74.0	-27.0	Peak	Horizontal
	10902.5	35.7	15.1	50.8	74.0	-23.2	Peak	Horizontal
*	14447.0	35.4	16.6	52.0	88.2	-36.2	Peak	Horizontal
*	17600.5	35.3	19.2	54.5	88.2	-33.7	Peak	Horizontal
	9457.5	35.5	13.5	49.0	74.0	-25.0	Peak	Vertical
	10885.5	35.9	15.2	51.1	74.0	-22.9	Peak	Vertical
*	14447.0	36.4	16.6	53.0	88.2	-35.2	Peak	Vertical
*	17558.0	35.7	19.3	55.0	88.2	-33.2	Peak	Vertical
Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBuV/m can be determined by adding a “conversion” factor of 95.2dB to the Limit of -27dBm/MHz to obtain the limit for out of band spurious emissions. Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

The Result of Radiated Emission for 9kHz ~ 30MHz:

Site	WZ-AC1	Test Date	2024-07-11
Test Engineer	Dick Shen	Temp./Humidity	25.3°C/53.1%
Factor	FMZB1519B_9kHz-30MHz	Polarity	Coaxial
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

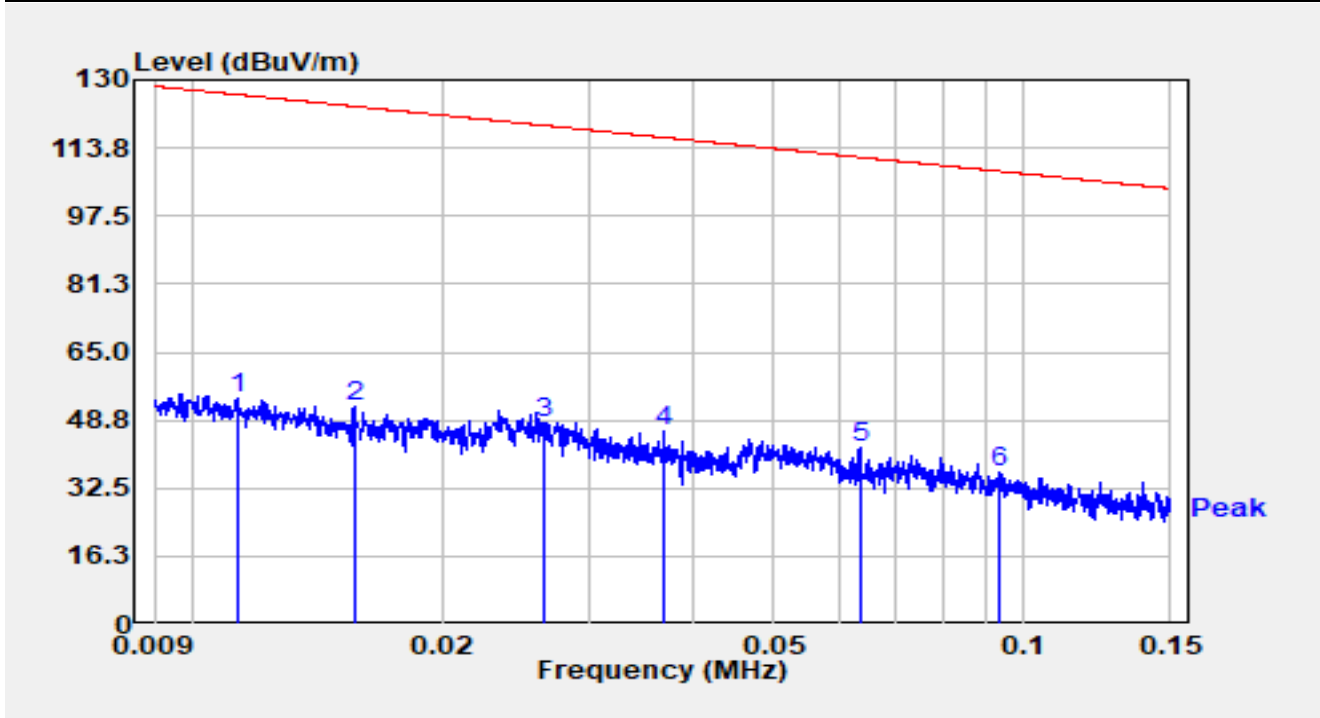


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.011	33.54	20.38	53.91	-72.61	126.52	Peak
2		0.016	31.91	20.20	52.11	-71.59	123.70	Peak
3	*	0.026	28.51	19.76	48.27	-70.87	119.13	Peak
4		0.037	27.01	19.33	46.34	-69.88	116.23	Peak
5	*	0.063	23.13	19.18	42.31	-69.24	111.55	Peak
6		0.093	17.22	19.12	36.34	-71.85	108.19	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-11
Test Engineer	Dick Shen	Temp./Humidity	25.3°C/53.1%
Factor	FMZB1519B_9kHz-30MHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	Coaxial
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

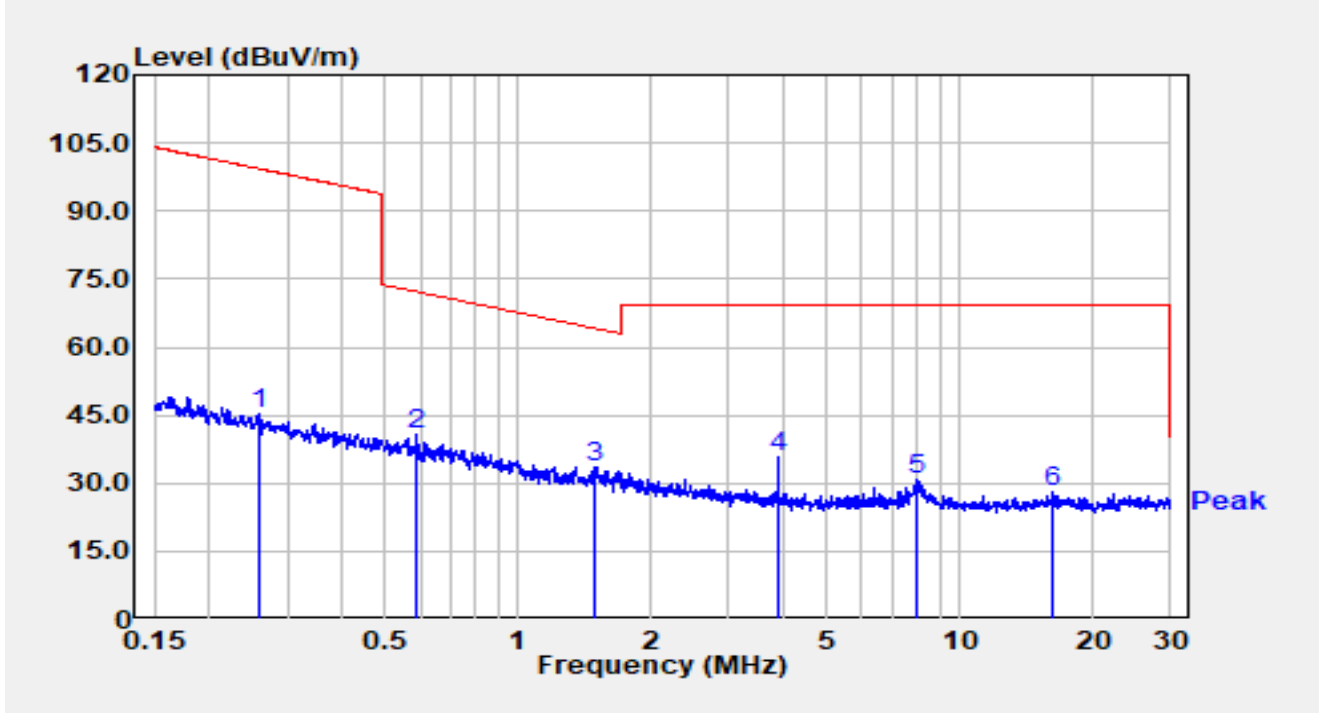


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.258	26.19	19.04	45.23	-54.15	99.38	Peak
2		0.587	21.66	19.06	40.72	-31.52	72.24	Peak
3	*	1.499	14.39	19.17	33.56	-30.55	64.11	Peak
4	*	3.871	16.33	19.29	35.62	-33.88	69.50	Peak
5		7.977	11.40	19.18	30.58	-38.92	69.50	Peak
6		16.140	8.69	19.17	27.85	-41.65	69.50	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-11
Test Engineer	Dick Shen	Temp./Humidity	25.3°C/53.1%
Factor	FMZB1519B_9kHz-30MHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

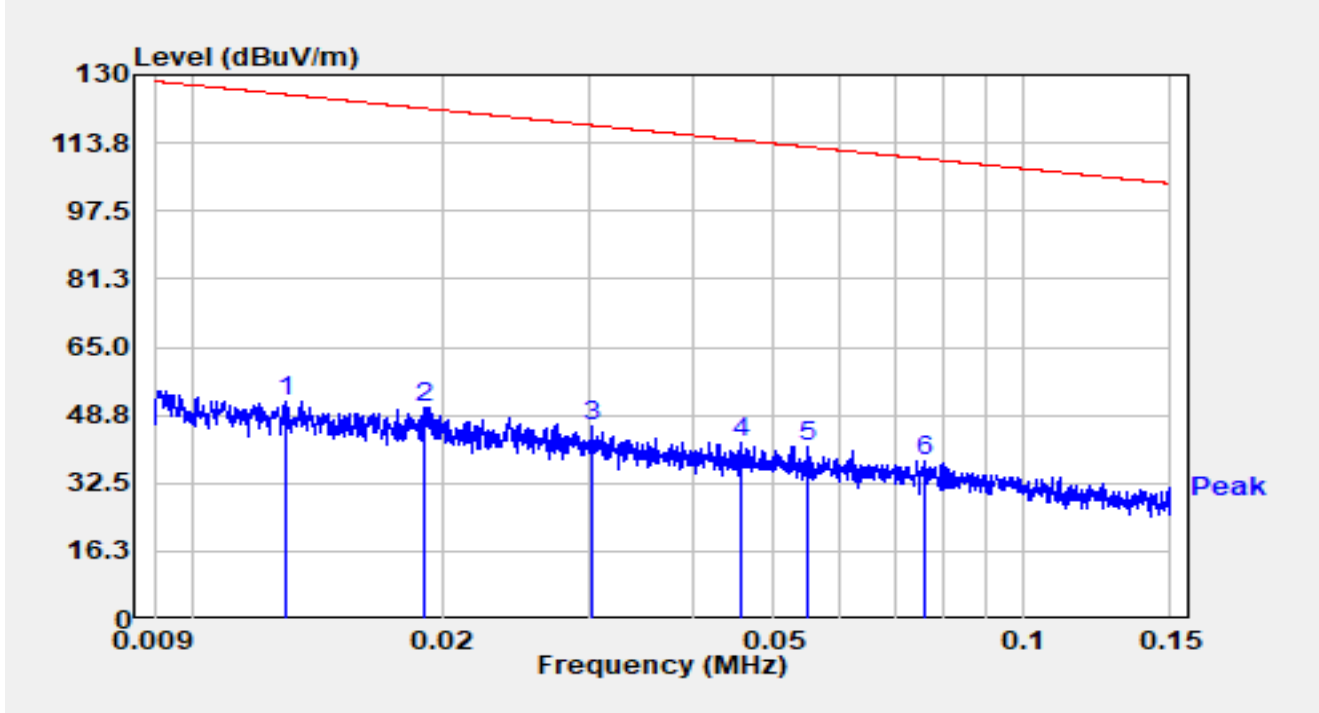


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.013	31.79	20.31	52.10	-73.27	125.36	Peak
2		0.019	30.49	20.06	50.55	-71.44	121.99	Peak
3		0.030	26.52	19.61	46.13	-71.88	118.01	Peak
4		0.046	22.73	19.23	41.96	-72.46	114.42	Peak
5	*	0.055	22.18	19.20	41.38	-71.42	112.81	Peak
6		0.076	18.67	19.15	37.82	-72.19	110.01	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-11
Test Engineer	Dick Shen	Temp./Humidity	25.3°C/53.1%
Factor	FMZB1519B_9kHz-30MHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

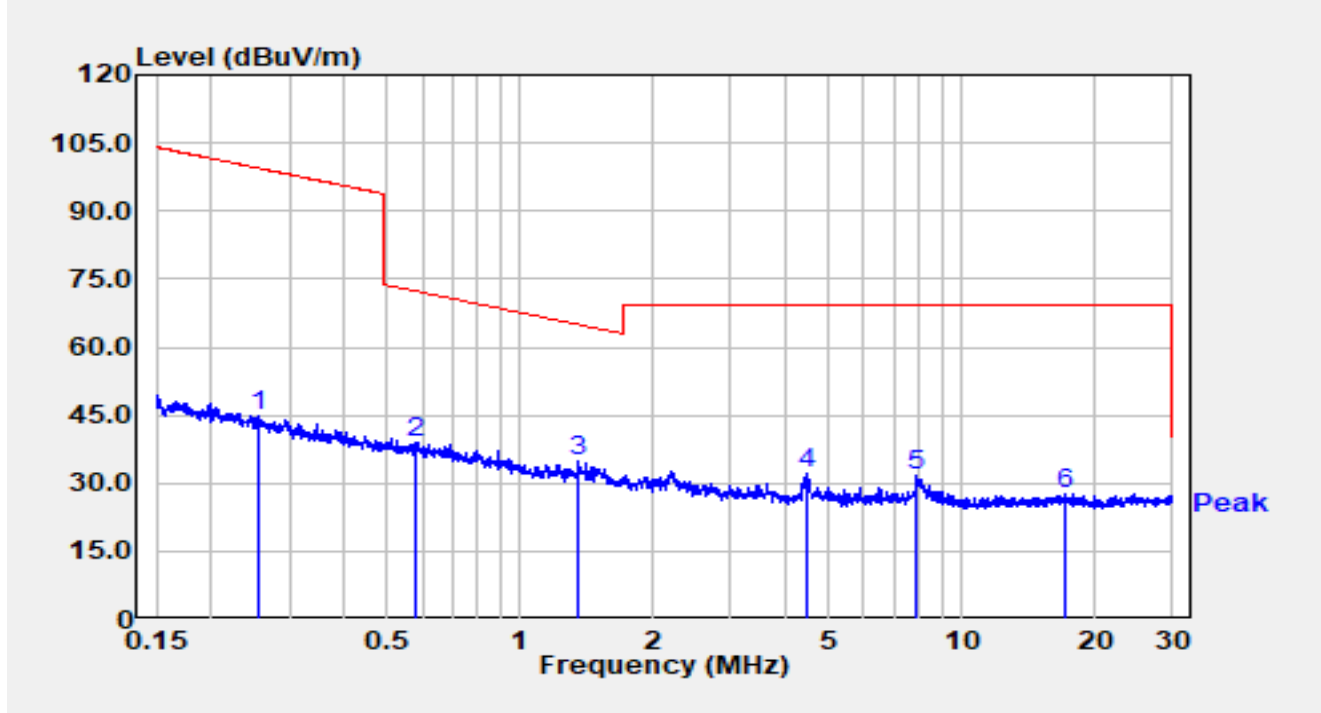


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.254	25.66	19.04	44.70	-54.80	99.50	Peak
2		0.582	20.06	19.06	39.12	-33.18	72.31	Peak
3	*	1.359	15.56	19.16	34.71	-30.25	64.96	Peak
4	*	4.454	12.84	19.26	32.10	-37.40	69.50	Peak
5		7.893	12.55	19.17	31.72	-37.78	69.50	Peak
6		17.109	8.58	19.19	27.76	-41.74	69.50	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

The Result of Radiated Emission for 30MHz ~ 1GHz:

Site	WZ-AC1	Test Date	2024-07-11
Test Engineer	Dick Shen	Temp./Humidity	25.3°C/53.1%
Factor	VULB 9168_25-1000MHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

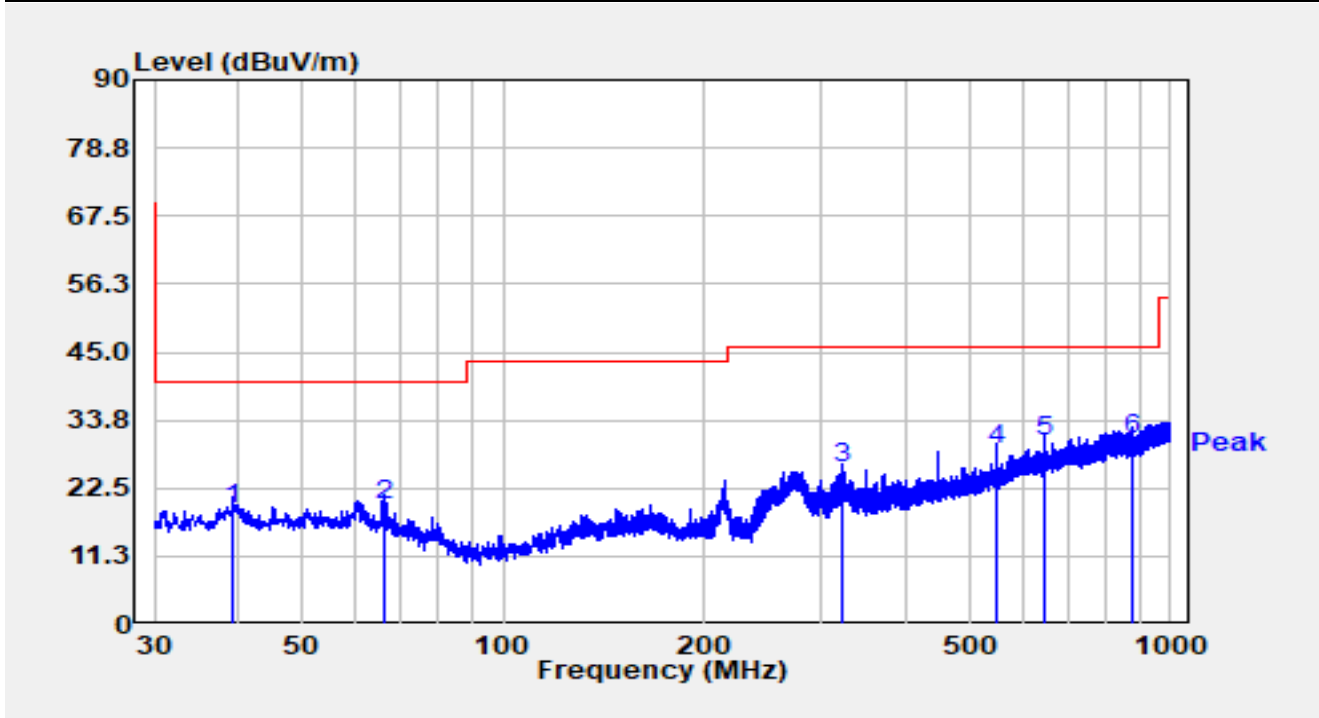


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		39.215	1.10	17.86	18.96	-21.04	40.00	QP
2		66.569	2.30	17.30	19.60	-20.40	40.00	QP
3		321.000	6.35	19.49	25.84	-20.16	46.00	QP
4		550.017	4.32	24.42	28.74	-17.26	46.00	QP
5		650.024	3.60	26.46	30.06	-15.94	46.00	QP
6	*	875.258	1.36	29.35	30.71	-15.29	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-11
Test Engineer	Dick Shen	Temp./Humidity	25.3°C/53.1%
Factor	VULB 9168_25-1000MHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5955MHz		

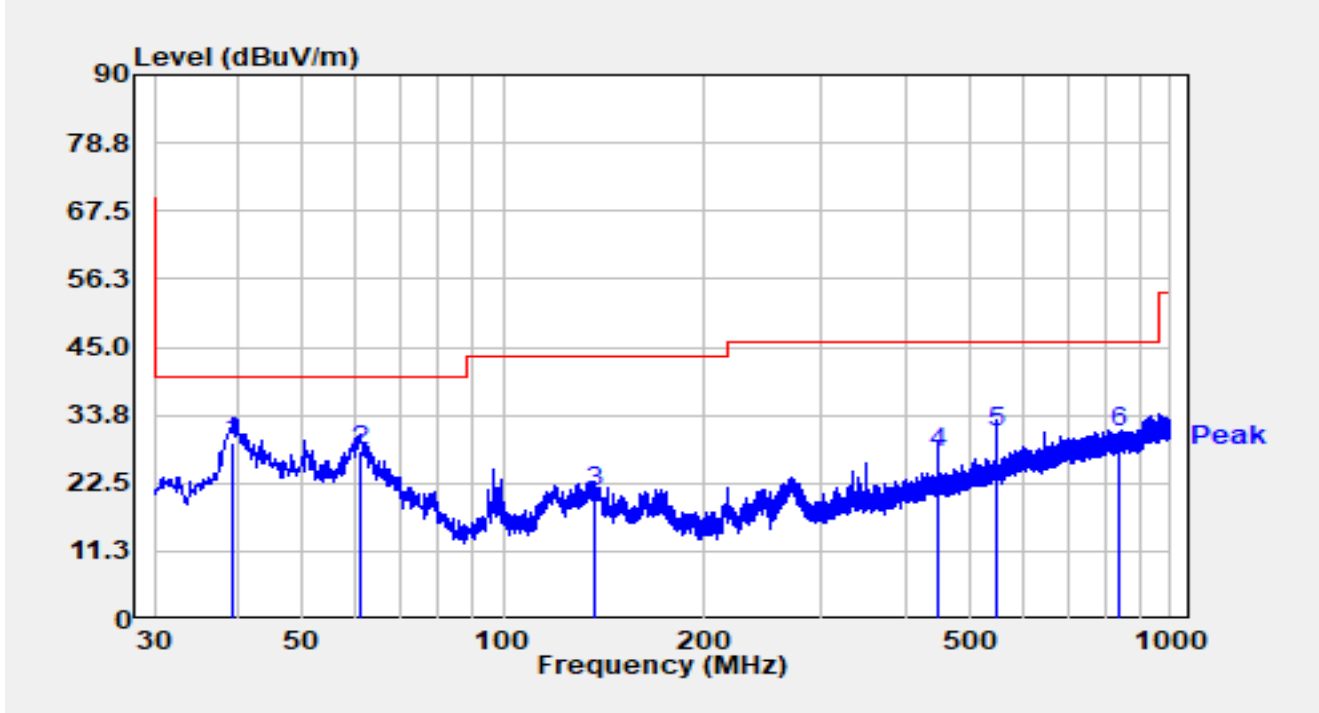


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	39.215	11.36	17.86	29.22	-10.78	40.00	QP
2		60.943	9.65	18.09	27.74	-12.26	40.00	QP
3		136.506	3.69	17.50	21.19	-22.31	43.50	QP
4		450.010	4.65	22.80	27.45	-18.55	46.00	QP
5		550.017	6.36	24.42	30.78	-15.22	46.00	QP
6		838.204	1.10	29.64	30.74	-15.26	46.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

The Result of Radiated Emission for 18~40 GHz:

Site	WZ-AC1	Test Date	2024-07-11
Test Engineer	Dick Shen	Temp./Humidity	25.3°C/53.1%
Factor	BBHA 9170_933_18-40GHz	Polarity	Horizontal
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-HET20 at 5955MHz		

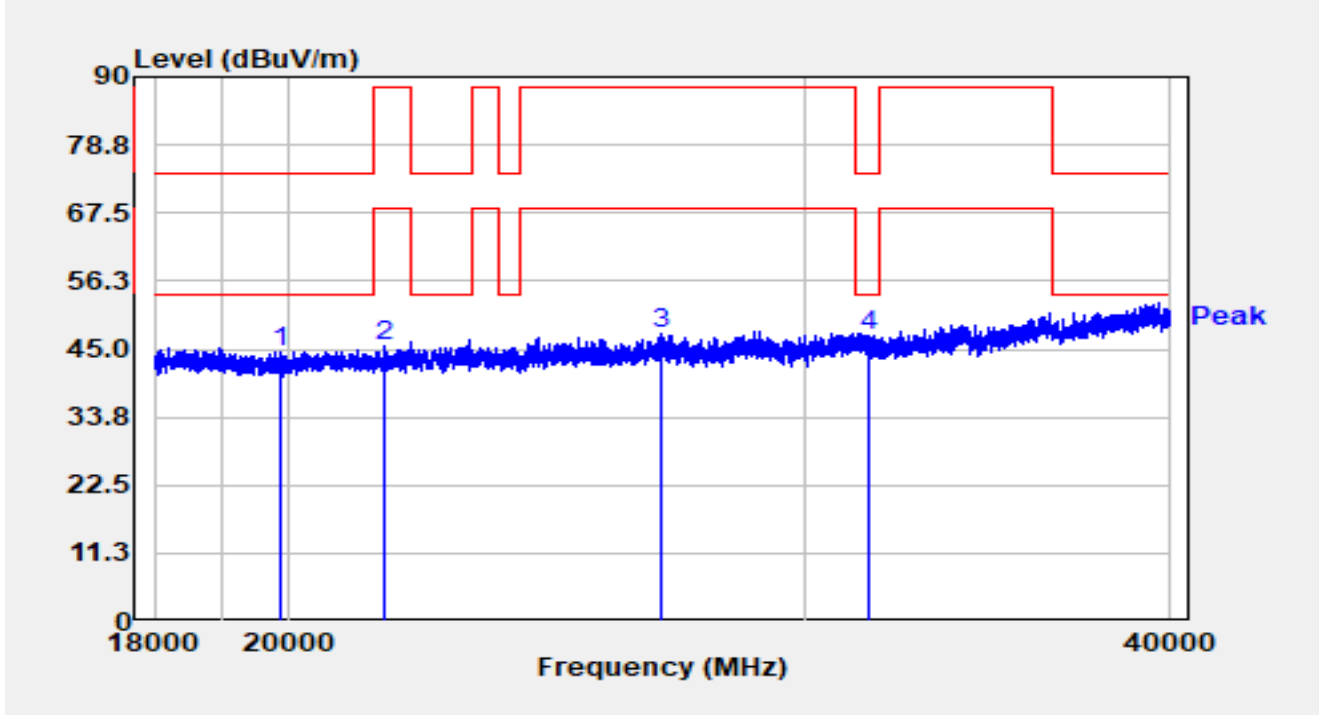


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		19872.200	54.69	-10.16	44.53	-29.47	74.00	Peak
2		21548.600	53.99	-8.48	45.51	-42.69	88.20	Peak
3		26806.600	53.27	-5.76	47.51	-40.69	88.20	Peak
4	*	31565.200	53.33	-6.01	47.32	-26.68	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2024-07-11
Test Engineer	Dick Shen	Temp./Humidity	25.3°C/53.1%
Factor	BBHA 9170_933_18-40GHz	Polarity	Vertical
EUT	ACCESS POINT	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-HET20 at 5955MHz		

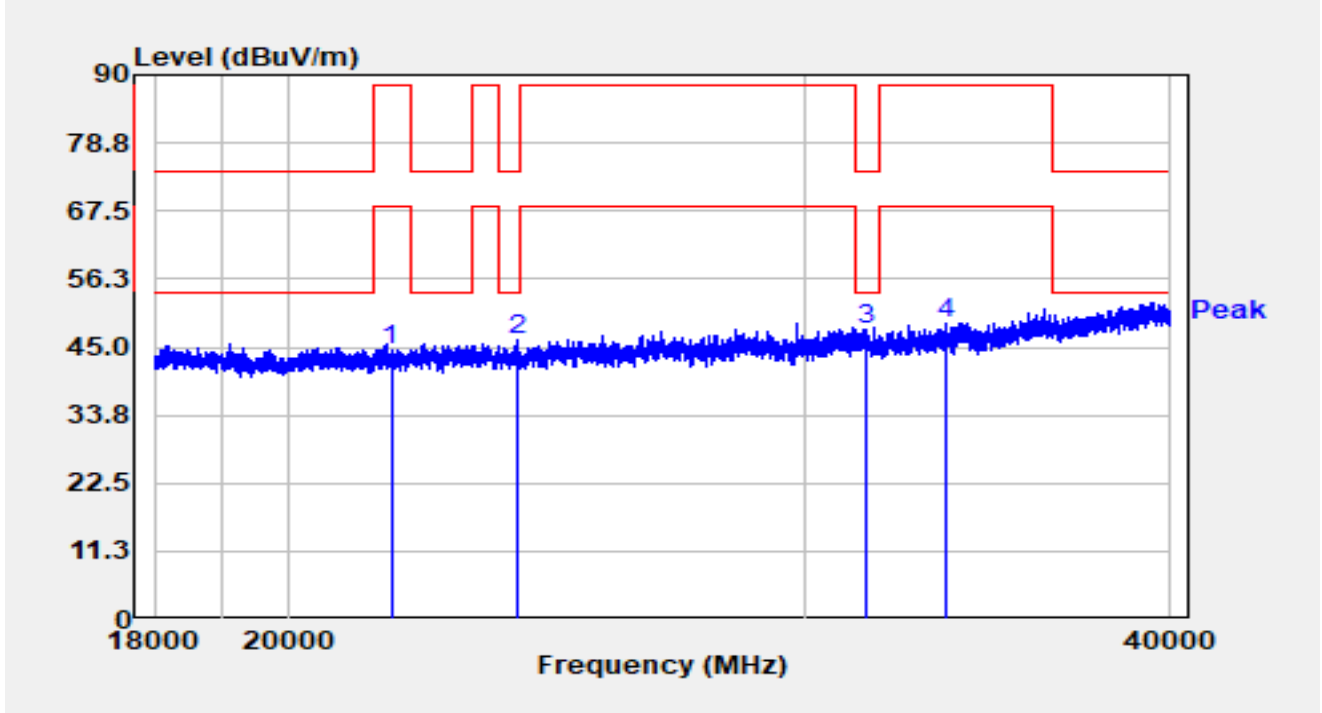


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		21678.400	52.96	-8.35	44.60	-43.60	88.20	Peak
2		23937.800	53.17	-7.04	46.13	-27.87	74.00	Peak
3	*	31494.800	53.82	-5.98	47.84	-26.16	74.00	Peak
4		33554.000	54.25	-5.46	48.79	-39.41	88.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

A.9 Radiated Band Edge Test Result

Site: WZ-AC1	Test Date: 2024-05-01
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

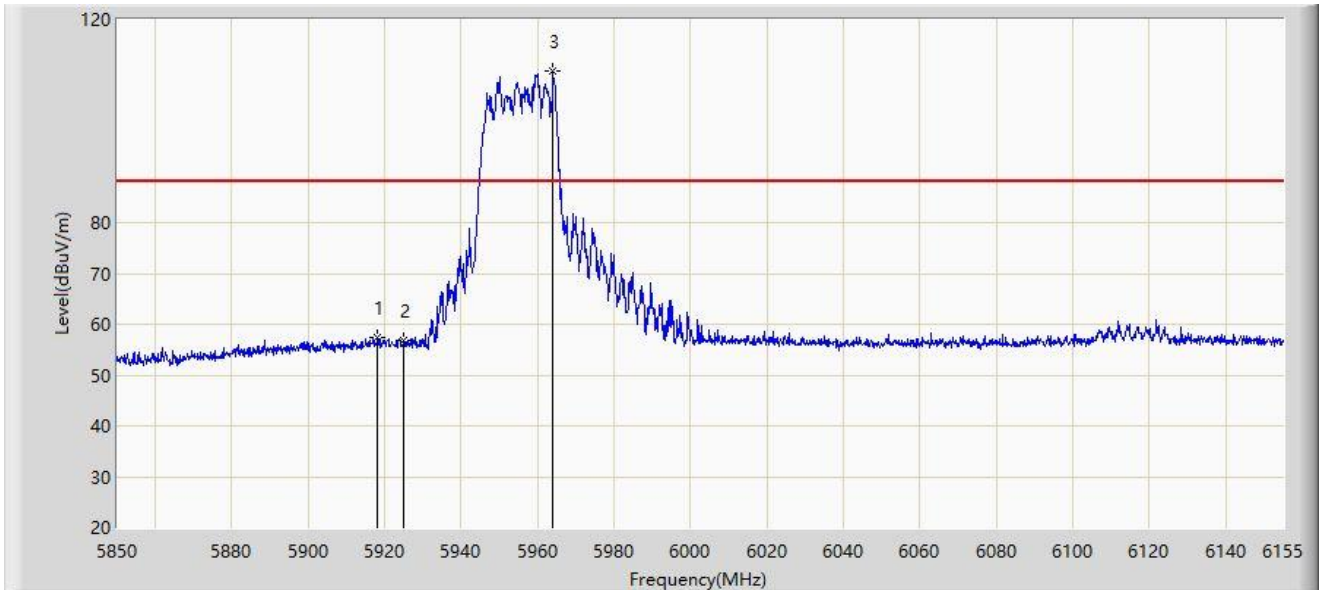


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5918.015	57.523	51.991	-30.677	88.200	5.531	PK
2		5925.000	56.807	51.253	-31.393	88.200	5.554	PK
3		5964.070	109.909	104.592	N/A	N/A	5.316	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-01
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Horizontal
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

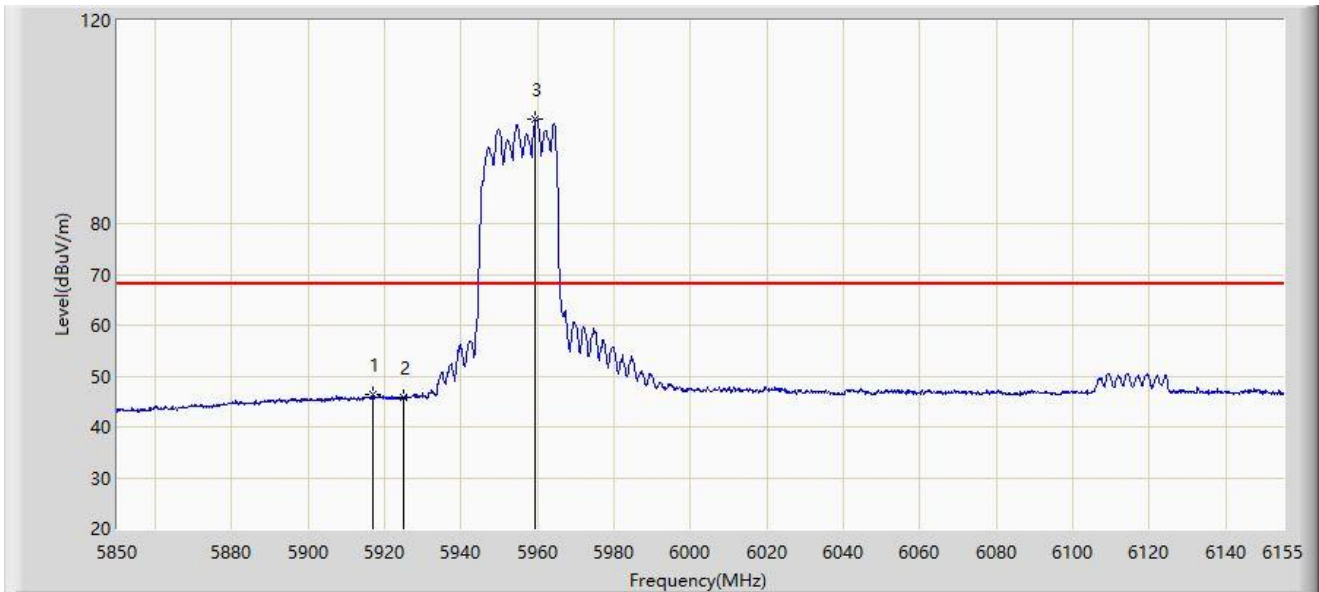


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5916.795	46.255	40.728	-21.945	68.200	5.527	AV
2		5925.000	45.743	40.189	-22.457	68.200	5.554	AV
3		5959.495	100.601	95.233	N/A	N/A	5.368	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-01
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

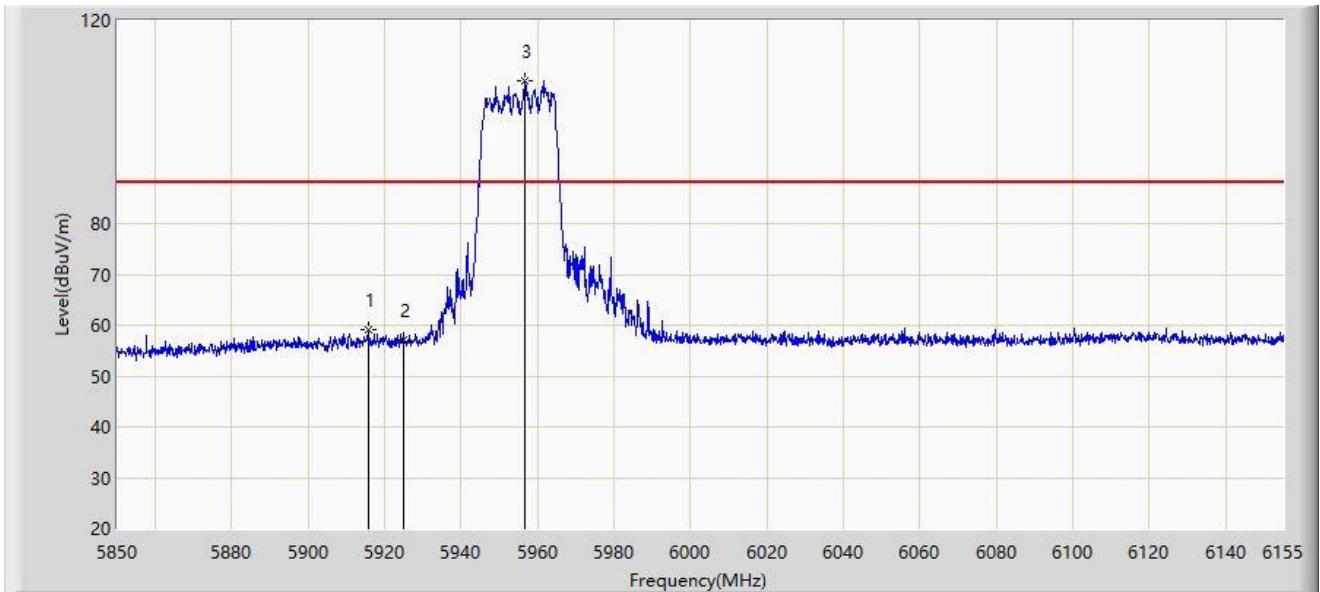


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5915.575	59.215	53.693	-28.985	88.200	5.521	PK
2		5925.000	57.049	51.495	-31.151	88.200	5.554	PK
3		5956.598	108.049	102.654	N/A	N/A	5.395	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC1	Test Date: 2024-05-01
Limit: FCC_6G_RE(3m)	Engineer: Dick Shen
Probe: BBHA9120D_1167_1-18GHz	Polarity: Vertical
EUT: ACCESS POINT	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

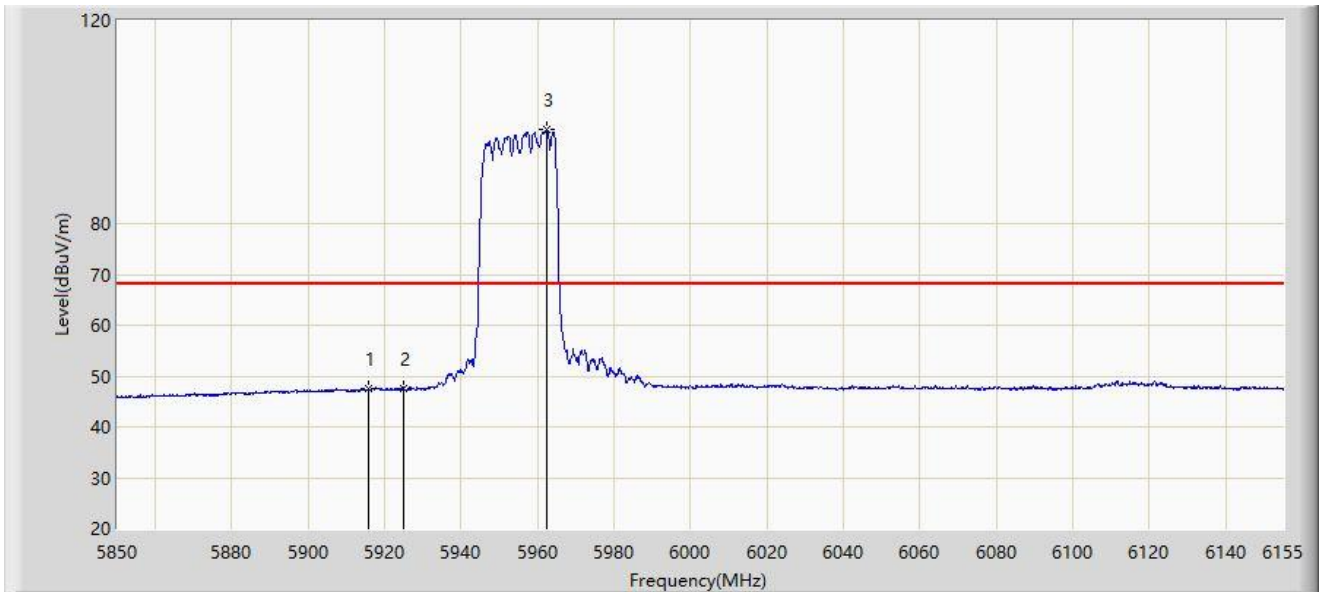

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		5915.728	47.627	42.105	-20.573	68.200	5.523	AV
2	*	5925.000	47.672	42.118	-20.528	68.200	5.554	AV
3		5962.393	98.427	93.092	N/A	N/A	5.335	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).