

FCC PART 90

TEST REPORT

For

Northfield Telecommunications, Inc. d/b/a Advanced Wireless Communications

20809 Kensington Blvd, Lakeville, MN 55044, United States

FCC ID: Q9SAWRDRP9050

Report Type: Original Report	Product Type: Digital Repeater
Report Number: RDG190320009-00A	
Report Date: 2019-05-20	
Reviewed By:	Jerry Zhang EMC Manager
Prepared By: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk
“*”

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS.....	7
TEST EQUIPMENT LIST	8
FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
FCC §2.1046 & §90.205 - RF OUTPUT POWER.....	10
APPLICABLE STANDARD	10
TEST PROCEDURE	10
TEST DATA	10
FCC §2.1047 - MODULATION CHARACTERISTIC	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST DATA	11
FCC §2.1049 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK	15
APPLICABLE STANDARD	15
TEST PROCEDURE	15
TEST DATA	15
FCC §2.1051 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA	21
FCC §2.1053 §90.210 - RADIATED SPURIOUS EMISSIONS	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA	24
FCC §2.1055 & §90.213 - FREQUENCY STABILITY.....	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA	26

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....28
 APPLICABLE STANDARD28
 TEST PROCEDURE28
 TEST DATA29

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Digital Repeater
EUT Model:	AWR-DRP9050
Modulation Type:	FM, 4FSK
Channel Spacing:	12.5 kHz
Frequency Range:	400-470 MHz
Rated Output Power: (Conducted)	High Power Level: 50W Low Power Level: 5W
Rated Input Voltage:	110-240V AC
External Dimension:	482mm(L)*440mm(W)*89mm(H)
Serial Number:	190320009
EUT Received Date:	2019.3.20

Objective

This test report is prepared on behalf of *Northfield Telecommunications, Inc. d/b/a Advanced Wireless Communications* in accordance with Part 2, and Part 90 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No related submittal(s)/grant(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{dB}$
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	$\pm 1.5\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The frequencies were configured for testing in engineering mode, which was provided by manufacturer.

EUT Exercise Software

No EUT exercise software was used in test.


Equipment Modifications

No modification was made to the EUT tested.

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Unknown	Load	/	/

Block Diagram of Test Setup

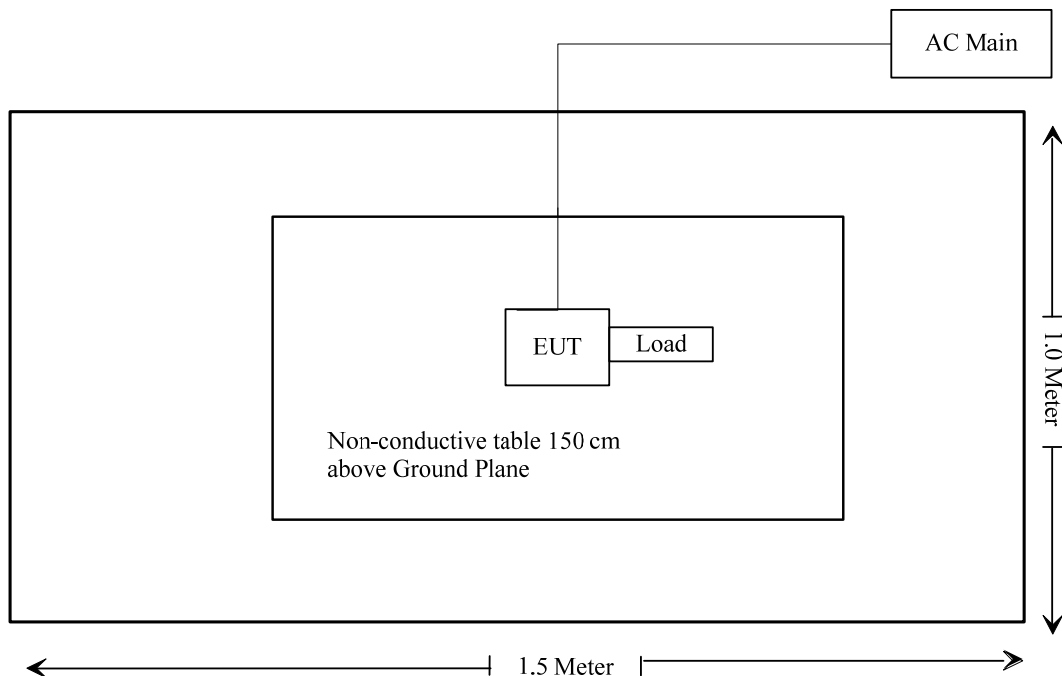

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§1.1310&§2.1091	Maximum Permissible Exposure (MPE)	Compliance
§2.104;§90.205	RF Output Power	Compliance
§2.1047	Modulation Characteristic	Compliance
§2.1049; §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
§2.1051; §90.210	Spurious Emission at Antenna Terminal	Compliance
§2.1053; §90.210	Spurious Radiated Emissions	Compliance
§2.1055; §90.213	Frequency Stability	Compliance
§90.214	Transient Frequency Behavior	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
R&S	EMI Test Receiver	ESPI	100120	2018-12-10	2019-12-10
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2018-05-06	2019-05-06
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-01-04	2020-01-04
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2018-09-05	2019-09-05
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2018-08-03	2019-08-03
Unknown	Coaxial Cable	C-SJ00-0010	C0011/05	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN749	Each time	N/A
OuLi	Band Rejector Filter	400-470	003	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05201	2019-01-04	2020-01-04
ESPEC	Constant temperature and humidity Tester	ESX-4CA	018 463	2019-03-26	2020-03-26
UNI-T	Multimeter	UT39A	M130199938	2018-07-24	2019-07-24
LEADER	Millivoltmeter	LMV-181A	601788	2018-08-11	2019-08-10

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to 1.1310, 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for Maximum Permissible Exposure (MPE)

Limits for Occupational/Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E , H or S (minutes)
0.3- 3.0	614	1.63	(100)*	6
3.0 - 30	1842/f	4.89/f	(900/f ²)*	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6

f = frequency in MHz;

* = Plane-wave equivalent power density;

MPE Calculation

Prediction of power density at the distance of the applicable MPE limit

$$S = PG/4\pi R^2$$

Where: S = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

MPE Results

Frequency (MHz)	Antenna Gain		Maximum Average output power including Tune-up Tolerance (mW)	Operation Duty Cycle (%)	Evaluation Distance (cm)	Power Density (mW/cm ²)	Power Density Limit (mW/cm ²)
	(dBi)	(numeric)					
400-470	0	1.0	50000	50	70	0.41	1.33

Note: the maximum power including Tune-up Tolerance is 50 W.

Result: The device meet FCC MPE at 70 cm distance

FCC §2.1046 & §90.205 - RF OUTPUT POWER

Applicable Standard

FCC §2.1046, §90.205

Test Procedure

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

R B/W	Video B/W
100 kHz	300 kHz

Test Data

Environmental Conditions

Temperature:	26.4 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Blake Yang on 2019-05-10

Test Mode: Transmitting

Test Result: Compliance. Please refer to following table.

Modulation Mode	Channel Separation (kHz)	f _c (MHz)	Reading (W)	
			High Power Level	Low Power Level
FM	12.5kHz	400.0125	49.091	5.309
		453.2125	49.993	4.875
		469.9875	45.290	5.023
4FSK	12.5kHz	400.0125	48.417	5.470
		453.2125	49.204	5.023
		469.9875	45.361	5.572

Note: The rated high power level is 50W, and rated low power level is 5W.

FCC §2.1047 - MODULATION CHARACTERISTIC**Applicable Standard**

FCC §2.1047

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Procedure

Test Method: TIA/EIA-603 2.2.3

Test Data**Environmental Conditions**


Temperature:	26.4 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

*The testing was performed by Blake Yang on 2019-05-10**Test Mode: Transmitting***Result:** Compliance.

Audio Frequency Response – High Power,12.5kHz

Carrier Frequency: 453.2125 MHz, Channel Separation:12.5kHz


Audio Frequency (Hz)	Response data (dB)
300	-11.57
400	-8.68
500	-6.52
600	-4.45
700	-3.61
800	-1.58
900	-1.36
1000	0.00
1200	1.54
1400	2.52
1600	4.31
1800	5.21
2000	5.67
2200	6.24
2400	7.31
2600	7.47
2800	8.68
3000	8.72

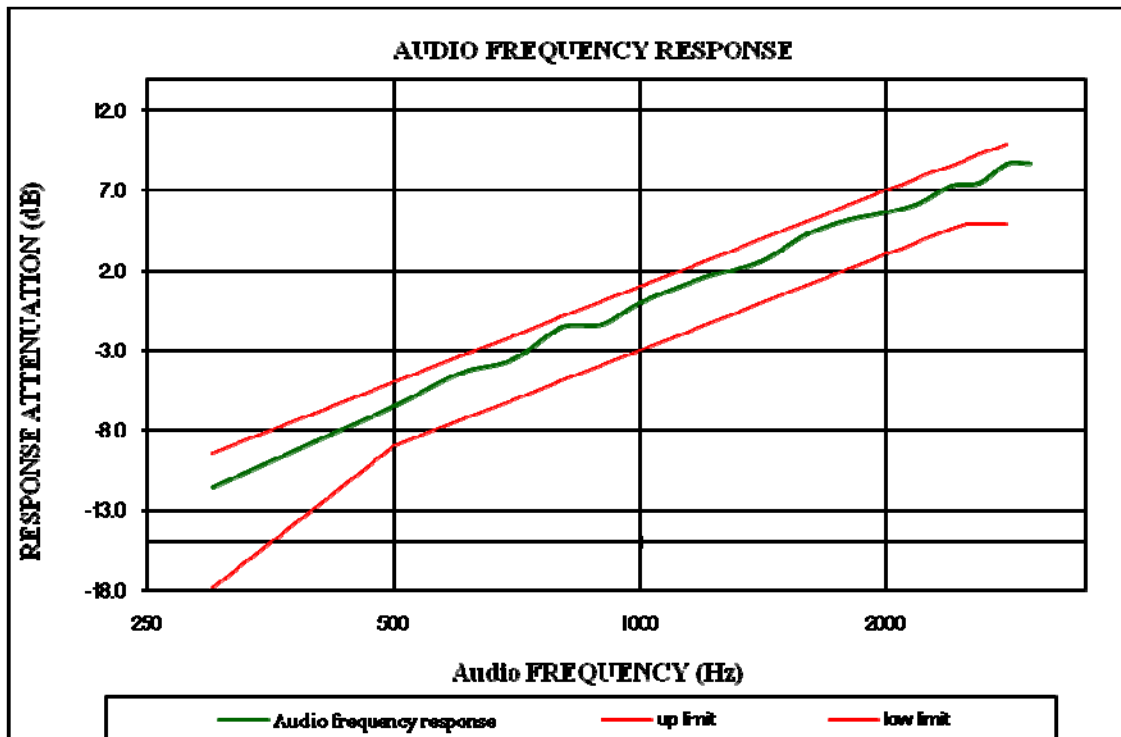

MODULATION LIMITING – High Power

Carrier Frequency: 453.2125 MHz, Channel Separation:12.5kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	1.732	0.352	1.572	0.162	2.5
400	2.059	0.413	1.899	0.283	2.5
500	2.166	0.456	1.896	0.286	2.5
600	2.326	0.482	2.116	0.322	2.5
700	2.415	0.496	2.215	0.376	2.5
800	2.392	0.503	2.102	0.453	2.5
900	2.386	0.536	2.146	0.366	2.5
1000	2.278	0.587	1.978	0.487	2.5
1200	2.193	0.558	1.973	0.408	2.5
1400	2.142	0.583	1.882	0.393	2.5
1600	2.075	0.609	1.925	0.559	2.5
1800	2.046	0.584	1.806	0.464	2.5
2000	1.942	0.572	1.802	0.522	2.5
2200	1.783	0.586	1.593	0.506	2.5
2400	1.676	0.538	1.426	0.418	2.5
2600	1.764	0.579	1.564	0.489	2.5
2800	1.513	0.621	1.403	0.571	2.5
3000	1.135	0.634	0.985	0.444	2.5

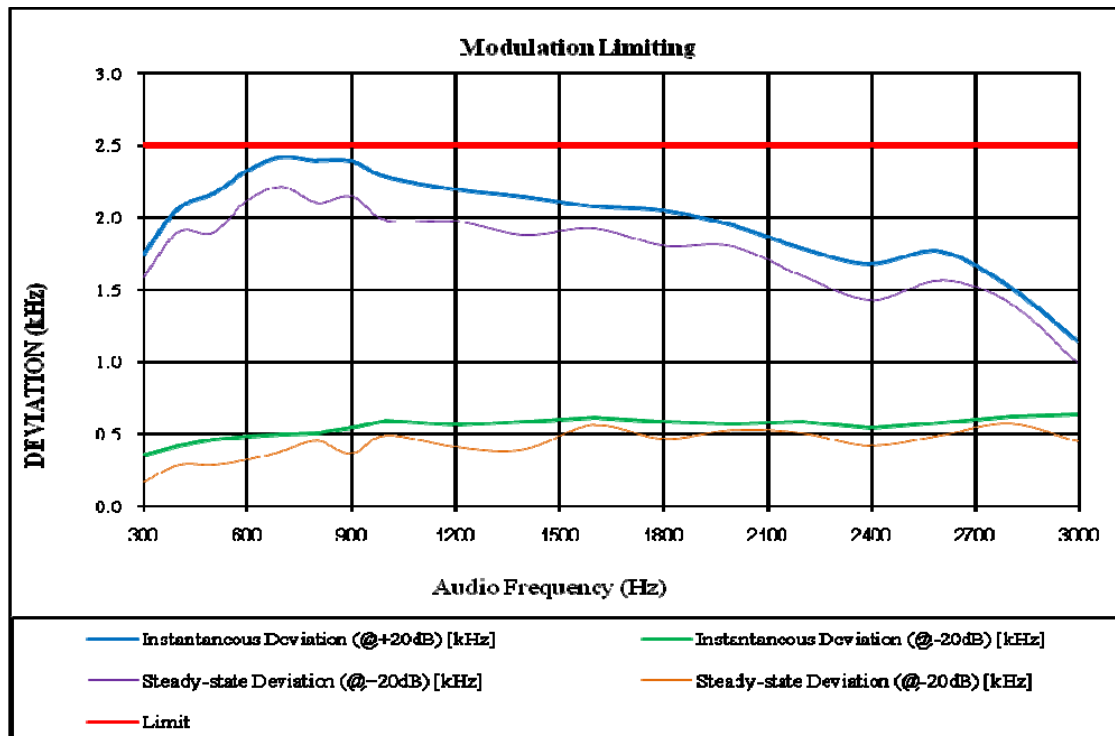

Audio Frequency Low Pass Filter Response – High Power

Carrier Frequency: 453.2125 MHz, Channel Spacing = 12.5 kHz

Audio Frequency	Response Attenuation	Limit
kHz	dB	dB
3.0	-4.8	0.0
3.5	-8.9	-6.7
4.0	-16.2	-12.5
5.0	-27.1	-22.2
7.0	-41.2	-36.8
10.0	-56.3	-52.3
15.0	-73.4	-69.9
20.0	-86.2	-82.5
30.0	-87.8	-82.5
50.0	-86.8	-82.5
70.0	-86.7	-82.5

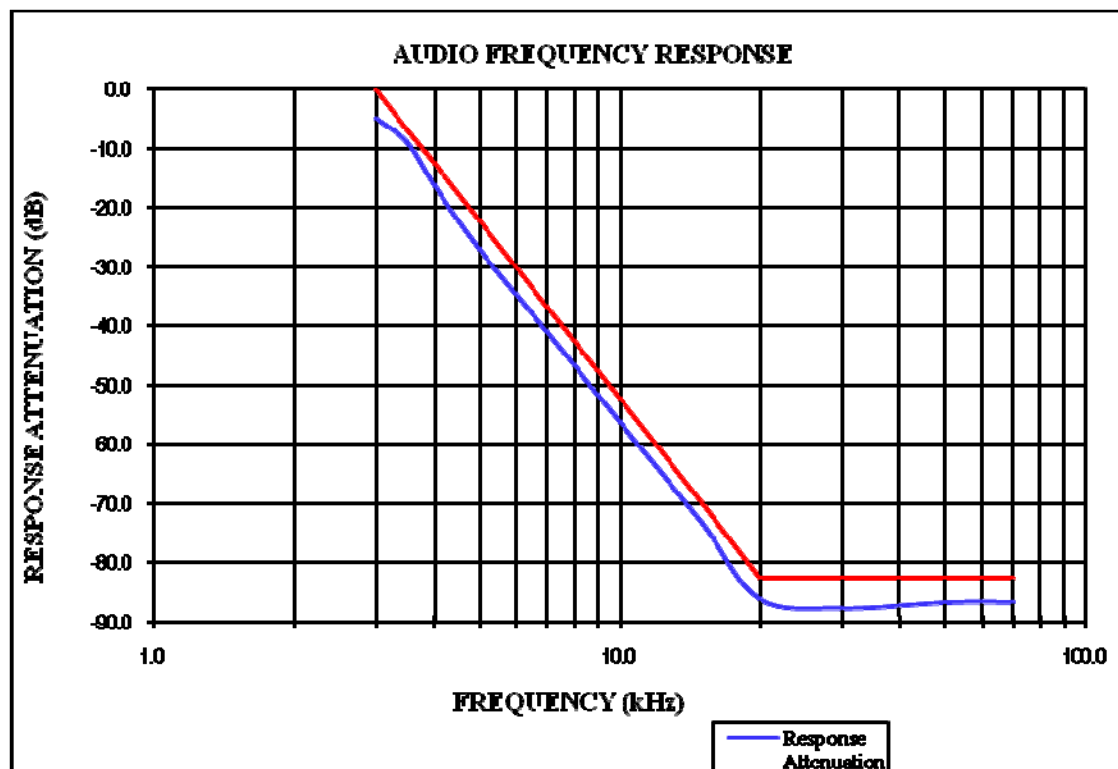

FCC §2.1049 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §90.209 and §90.210

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz or 300 Hz and the spectrum was recorded in the frequency band.

Test Data

Environmental Conditions

Temperature:	26.4 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Blake Yang on 2019-05-10

Test mode: transmitting

Test Frequency (MHz)	Modulation Mode	Channel Separation	Power Level	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
453.2125	FM	12.5kHz	High	5.912	6.313
			Low	5.912	6.513
	4FSK	12.5kHz	High	7.916	10.420
			Low	7.816	10.922

Note: Emission bandwidth was based on calculation method instead of measurement.

Emission Designator

Per CFR 47 §2.201& §2.202, $BW = 2M + 2D$

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator 7K60F1D and 7K60F1E

The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).

F1D and F1E portion of the designator indicates digital information.

Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.

Delta 1 [T1] 0.58 dB RBW 100 Hz RF Att 20 dB
 Ref Lvl 50 dBm VSW 1 kHz Unit dBm
 50 dBm 6.31262525 kHz SWT 25 s

40.2 dB Offset
 D1 43.13 dBm
 1MAX D2 17.06 dBm

1 [T1] 16.01 dBm
 453.20924349 MHz
 1 [T1] 0.58 dB
 6.31262525 kHz
 OFF 5.91182365 kHz
 T1 [T1] 29.70 dBm
 453.20944389 MHz
 T2 [T1] 29.91 dBm
 453.21535571 MHz

Center 453.2125 MHz 5 kHz/ Span 50 kHz

Date: 9.MAY.2019 22:57:47

Ref Lvl 50 dBm RBW 100 Hz RF Att 20 dB
 VBW 1 kHz
 SWT 50 s Unit dBm

40.2 dB Offset

LIMIT CHECK : PASSED

1MAX

EM_D

Center 453.2125 MHz 10 kHz/ Span 100 kHz

Date: 9.MAY.2019 23:35:54

Ref Lvl 40 dBm
 Marker 1 [T1] -2.65 dBm
 RBW 100 Hz
 VBW 1 kHz
 RF Att 20 dB
 Unit dBm
 40.2 dB Offset
 D1 33.14 dBm
 453.20914329 MHz
 SWT 25 s
 453.20914329 MHz
 5.91182365 kHz
 T1 [T1] 19.71 dBm
 453.20944389 MHz
 T2 [T1] 19.91 dBm
 453.21535571 MHz
 D2 7.14 dBm
 6.51302605 kHz
 1MAX
 Center 453.2125 MHz
 5 kHz/
 Span 50 kHz
 Date: 9.MAY.2019 23:00:07

Ref Lvl 50 dBm RBW 100 Hz RF Att 20 dB VBW 1 kHz SWT 50 s Unit dBm

40.2 dB Offset

LIMIT CHECK : PASSED

1MAX



EM_D

Center 453.2125 MHz Span 100 kHz


10 kHz/

Date: 9.MAY.2019 23:41:43


The figure is a spectrum plot with a blue trace showing a signal at 453.2125 MHz. The y-axis represents power in dBm, ranging from -50 to 50. The x-axis represents frequency, with a center of 453.2125 MHz and a span of 100 kHz. A red line indicates the limit check, which is passed. The signal is labeled '1MAX' and 'EM_D'. The plot shows a peak at 453.2125 MHz with a power level of approximately 35 dBm. The limit check is a red line that is 40.2 dB offset from the signal. The signal is a complex waveform, likely a modulated signal. The plot is titled 'LIMIT CHECK : PASSED'.

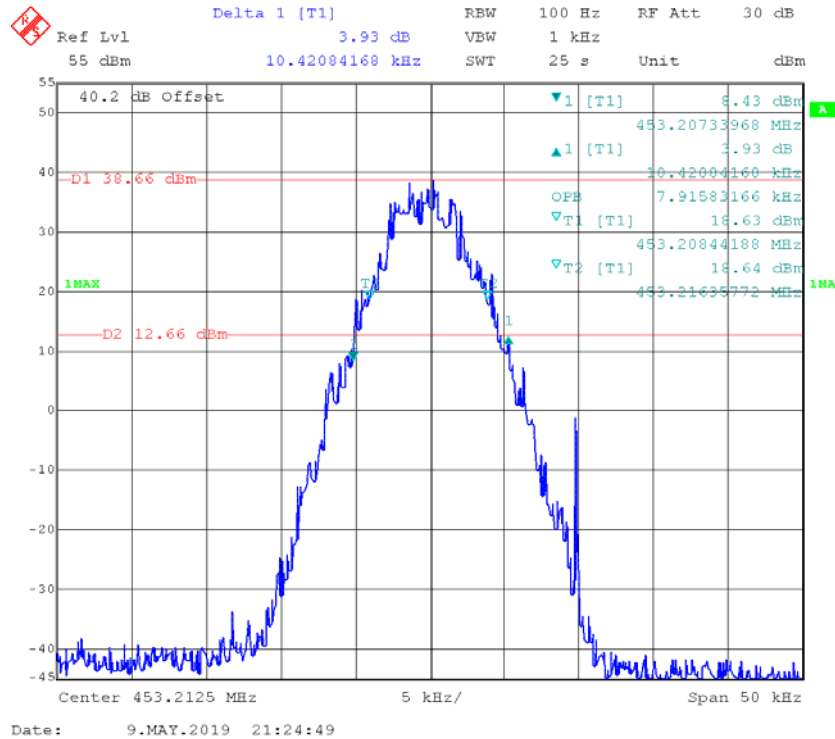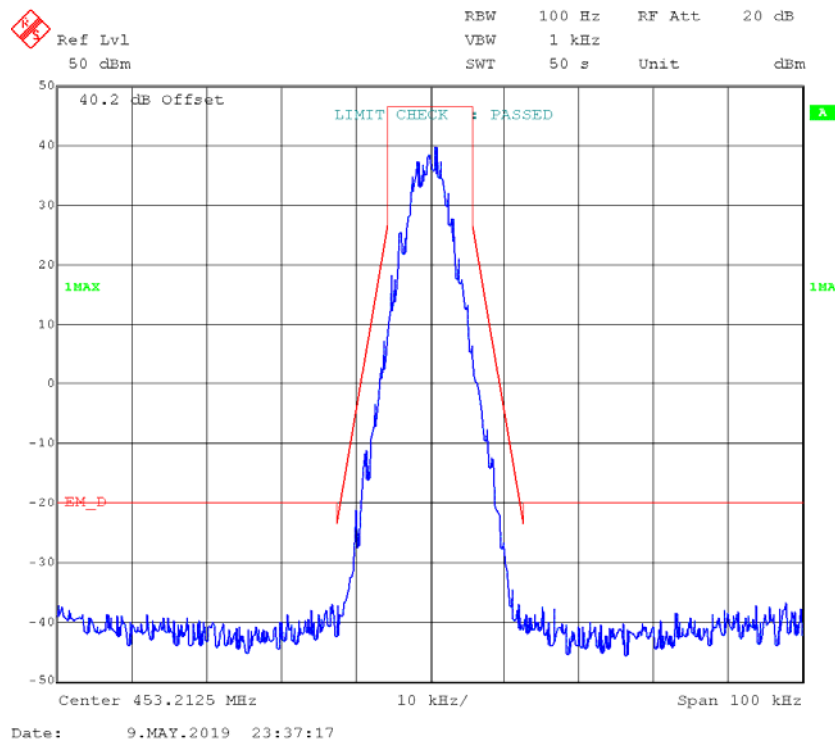4FSK,12.5kHz,High Power - Frequency 453.2125MHz: 99% Occupied & 26 dB Bandwidth**Emission Mask D**

4FSK,12.5kHz,Low Power - Frequency 453.2125MHz: 99% Occupied & 26 dB Bandwidth

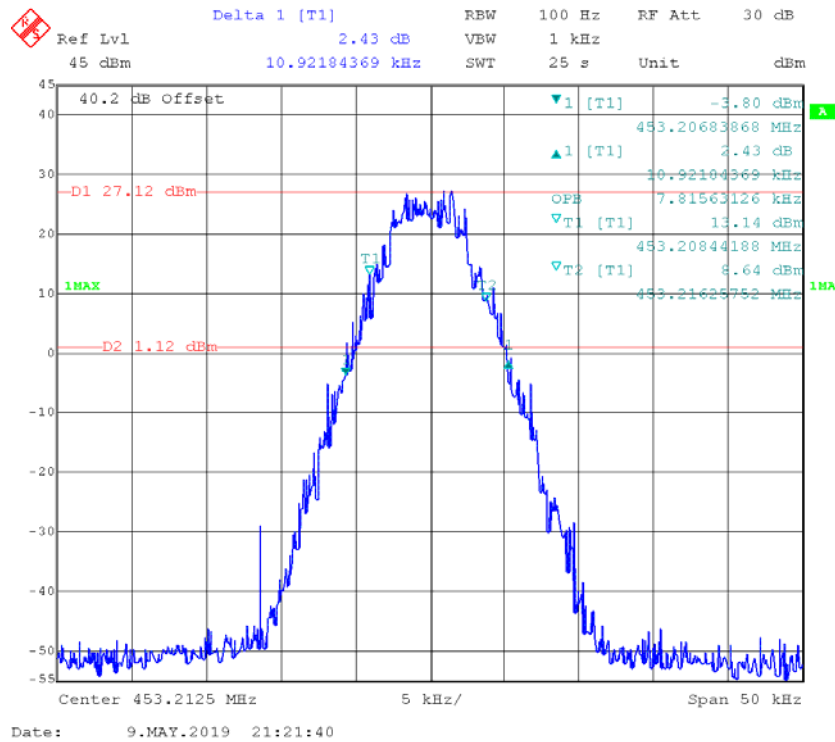

Emission Mask D

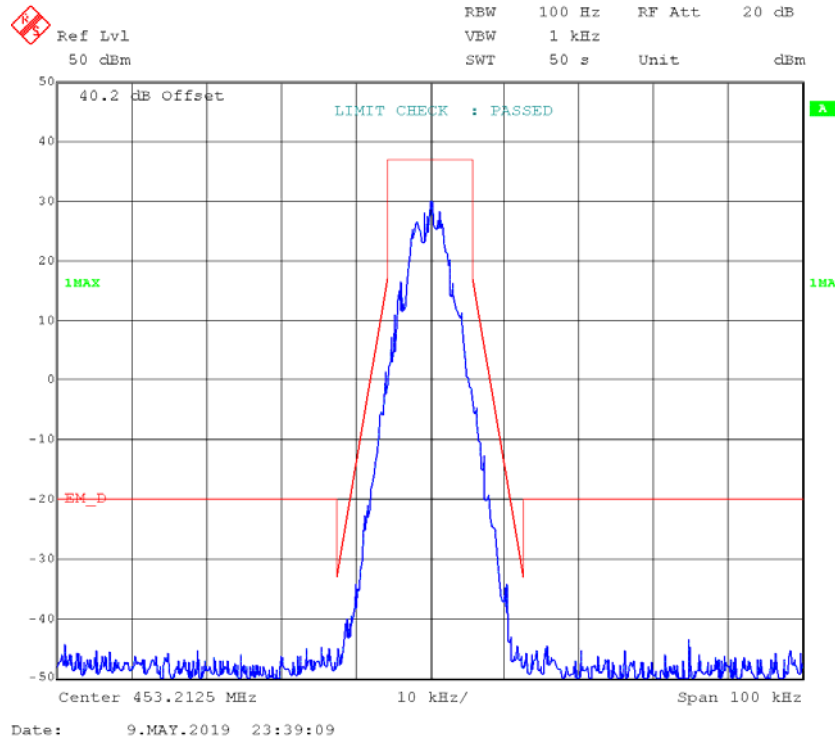

FCC §2.1051 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

FCC §2.1051, §90.210

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data

Environmental Conditions

Temperature:	26.4 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa


The testing was performed by Blake Yang on 2019-05-10

Test Mode: Transmitting, please refer to the following plots.


FM, High power:



30MHz – 1 GHz, Channel Spacing 12.5 kHz, 453.2125MHz

Fund.test with
Filter

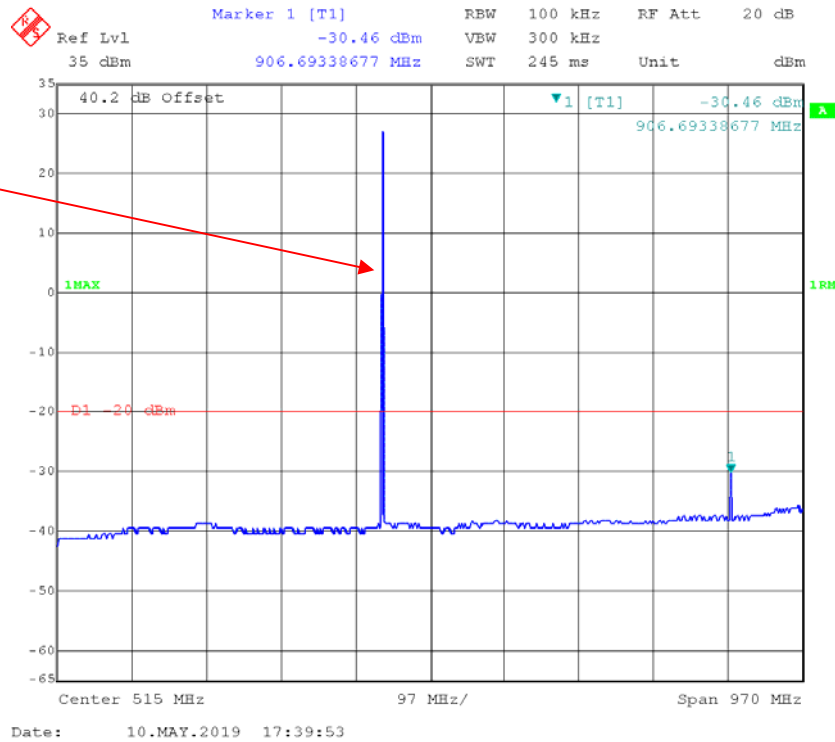

1 GHz – 5 GHz, Channel Spacing 12.5 kHz, 453.2125 MHz

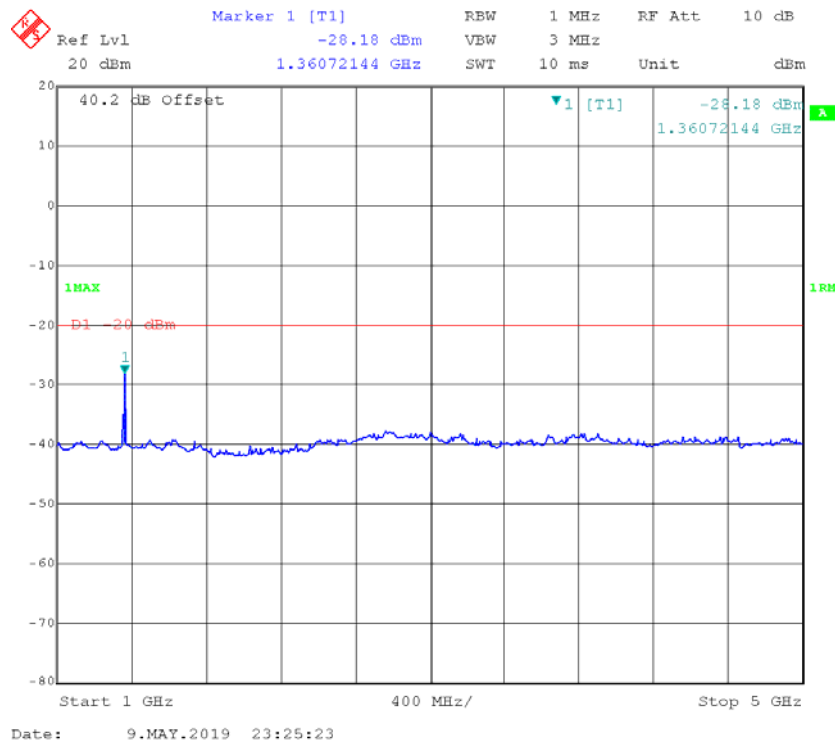

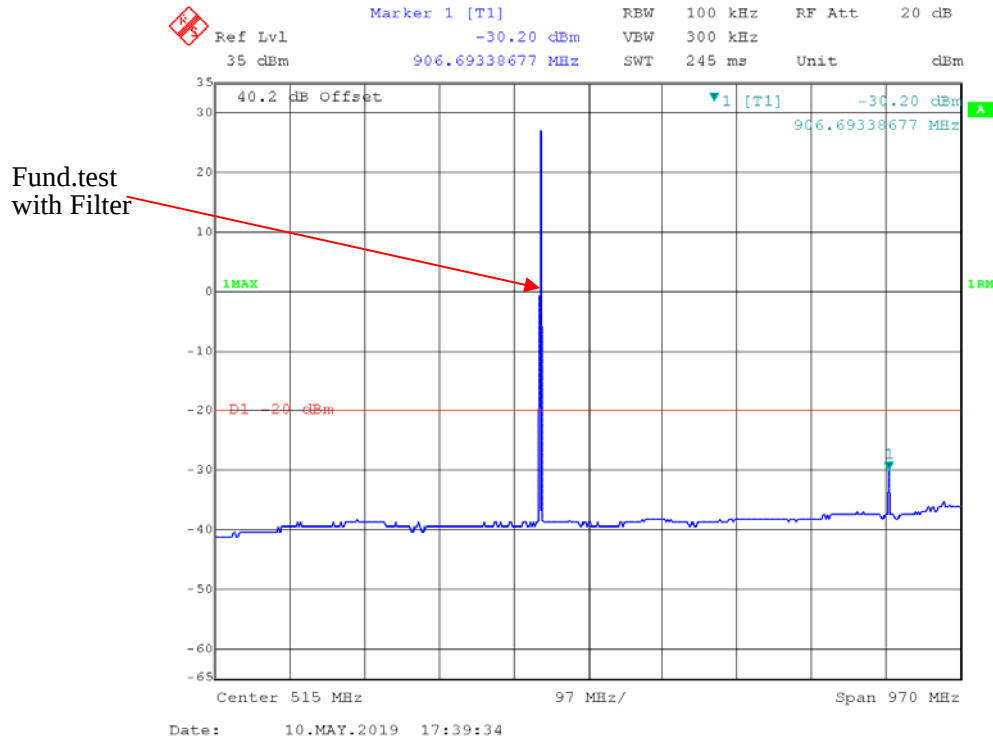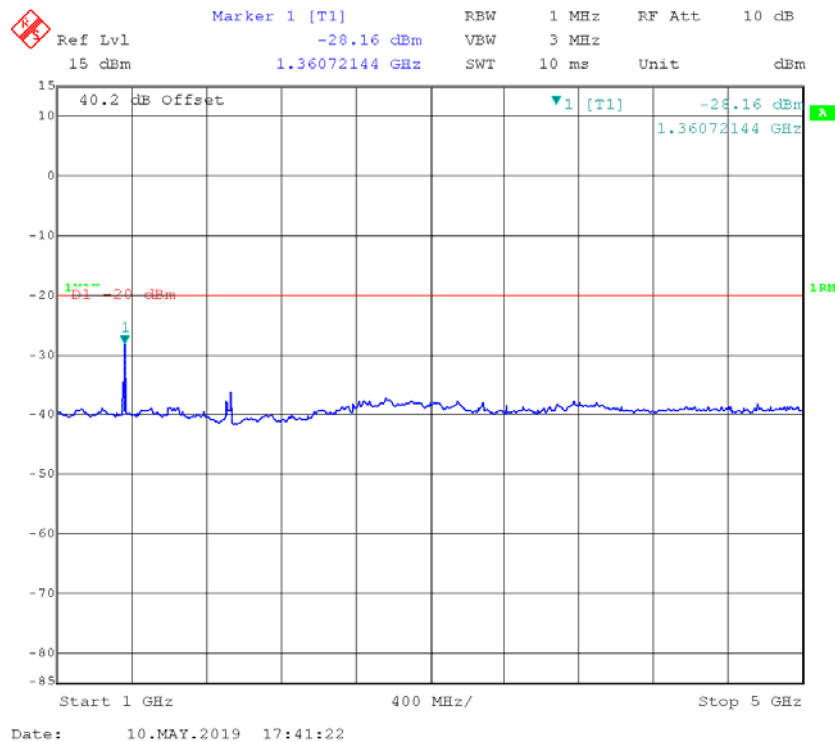12.5kHz, 4FSK, High power:**30MHz – 1 GHz, Channel Spacing 12.5 kHz, 453.2125 MHz****1 GHz – 5 GHz, Channel Spacing 12.5 kHz, 453.2125 MHz**

FCC §2.1053 §90.210 - RADIATED SPURIOUS EMISSIONS**Applicable Standard**

FCC §2.1053, §90.210

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

Test Data**Environmental Conditions**

Temperature:	22.9~26.1 °C
Relative Humidity:	52~61%
ATM Pressure:	100.4~101.1kPa

** The testing was performed by Vern Shen & Lucy Lu from 2019-05-09&2019-05-14*

Test Mode: Transmitting

30MHz - 5GHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM,Frequency: 453.2125MHz-12.5 kHz								
906.4250	H	33.71	-63.16	0.00	1.03	-64.19	-20.00	44.19
906.4250	V	37.40	-61.44	0.00	1.03	-62.47	-20.00	42.47
88.20	H	50.00	-61.47	0.00	0.36	-61.83	-20.00	41.83
88.20	V	55.00	-58.82	0.00	0.36	-59.18	-20.00	39.18
1359.64	H	68.99	-44.37	8.72	1.20	-36.85	-20.00	16.85
1359.64	V	65.67	-48.41	8.72	1.20	-40.89	-20.00	20.89
1812.85	H	51.03	-63.15	11.19	0.72	-52.68	-20.00	32.68
1812.85	V	49.86	-64.88	11.19	0.72	-54.41	-20.00	34.41
4FSK,Frequency: 453.2125MHz-12.5 kHz								
906.4250	H	35.80	-61.07	0.00	1.03	-62.10	-20.00	42.10
906.4250	V	36.79	-62.05	0.00	1.03	-63.08	-20.00	43.08
88.20	H	51.20	-60.27	0.00	0.36	-60.63	-20.00	40.63
88.20	V	54.52	-59.30	0.00	0.36	-59.66	-20.00	39.66
1359.64	H	66.94	-46.42	8.72	1.20	-38.90	-20.00	18.90
1359.64	V	69.23	-44.85	8.72	1.20	-37.33	-20.00	17.33

Note:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC §2.1055 & §90.213 - FREQUENCY STABILITY

Applicable Standard

FCC §2.1055, §90.213

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Frequency Stability vs. Voltage: The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

Test Data**Environmental Conditions**

Temperature:	26.4 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Blake Yang on 2019-05-10

Test Mode: Transmitting

FM,12.5kHz, Reference Frequency: 453.2125 MHz, Limit: ± 1.5 ppm			
Temperature (°C)	Voltage Supplied (V _{AC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	120	453.21256	-0.33
-20		453.21251	0.61
-10		453.21256	-0.17
0		453.21253	0.23
10		453.21249	0.26
20		453.21250	0.24
30		453.21254	-0.92
40		453.21252	-0.03
50		453.21253	-0.12
20	138	453.21253	0.45
20	102	453.21256	-1.11

4FSK, 12.5kHz, Reference Frequency:453.2125 MHz, Limit: ± 1.5 ppm			
Temperature (°C)	Voltage Supplied (V _{AC})	Measured Frequency (MHz)	Frequency Error (ppm)
-30	120	453.21249	0.23
-20		453.21249	-1.38
-10		453.21257	0.70
0		453.21253	-0.47
10		453.21255	-1.18
20		453.21257	0.19
30		453.21254	0.76
40		453.21251	-0.28
50		453.21249	-0.29
20	138	453.21251	0.21
20	102	453.21257	-1.24

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR


Applicable Standard

Regulations: FCC §90.214

Test method: ANSI/TIA-603-D 2010, section 2.2.19.3

Test Procedure

- Connect the EUT and test equipment as shown on the following block diagram.
- Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ± 12.5 kHz deviation and set its output level to -100dBm.
- Turn on the transmitter.
- Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as P_0 .
- Turn off the transmitter.
- Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .

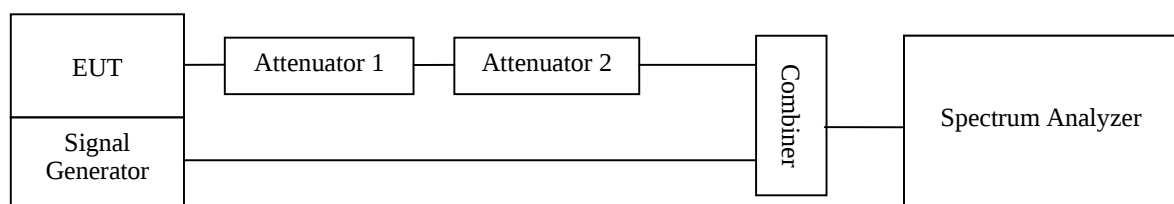

Test Data**Environmental Conditions**

Temperature:	26.4 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa


The testing was performed by Blake Yang on 2019-05-10

Channel Spacing (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	<10(t ₁)	±12.5 kHz	Pass
	<25(t ₂)	±6.25 kHz	
	<10(t ₃)	±12.5 kHz	


Please refer to the following plots.

FM, High Power Channel: 453.2125 MHz, 12.5kHz

Turn on

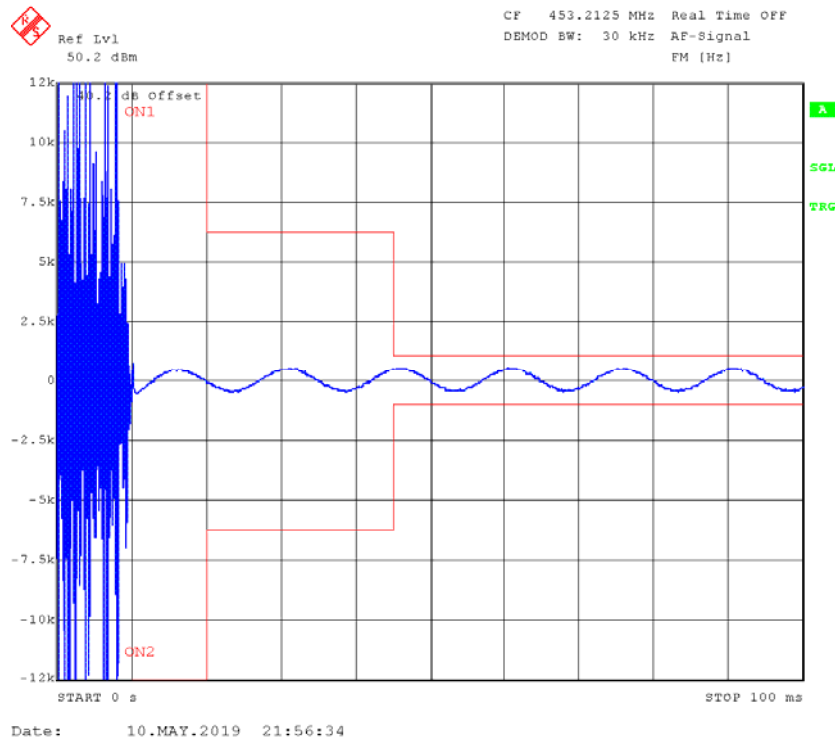

Turn off

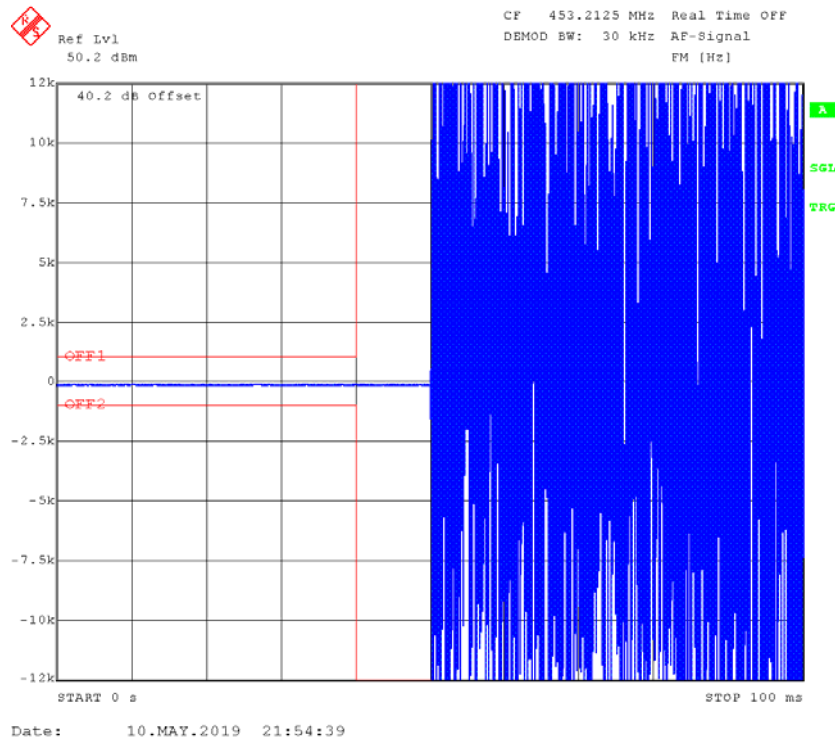

******* END OF REPORT *******