


Appendix B. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	20°C	Humidity	55%
Test Engineer	David Tseng	Configurations	2.4GHz WLAN function + Bluetooth function

Horizontal

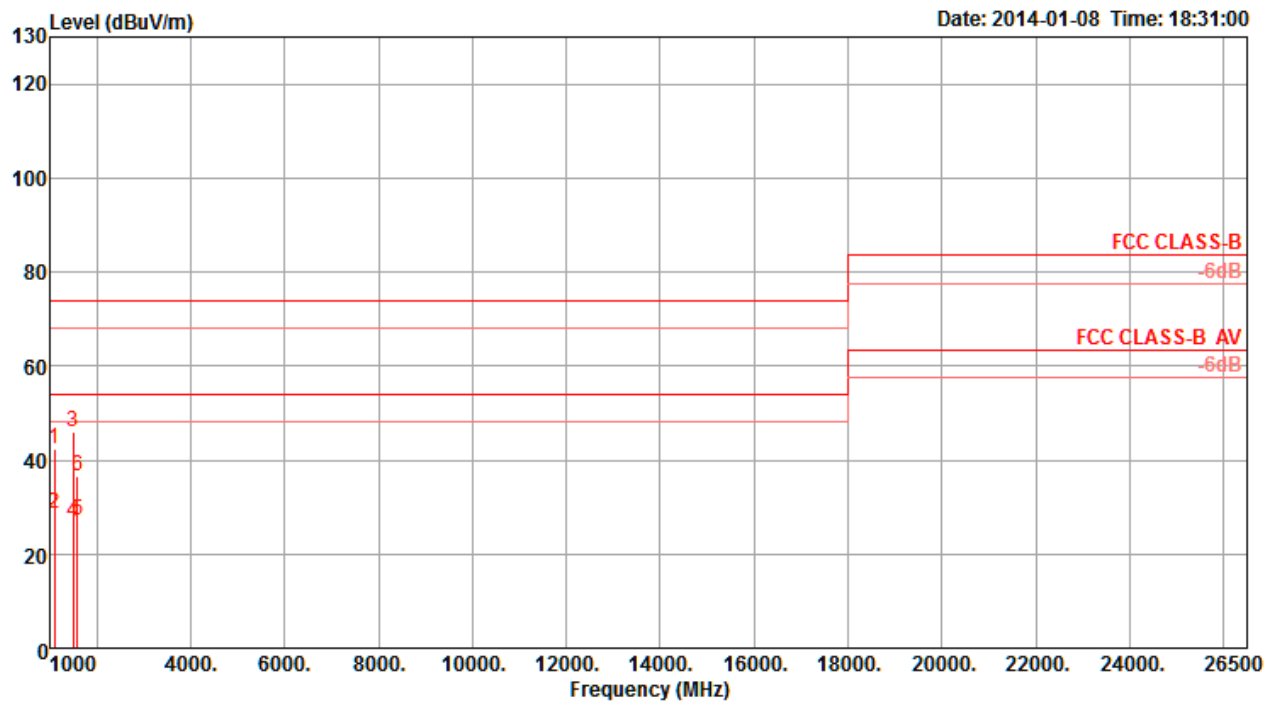

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	Remark	deg	cm	
1	1095.08	42.44	74.00	-31.56	52.23	1.92	35.76	-9.79	Peak	70	100	HORIZONTAL
2	1096.16	28.43	54.00	-25.57	38.22	1.92	35.76	-9.79	Average	70	100	HORIZONTAL
3	1494.92	46.07	74.00	-27.93	53.51	2.25	35.09	-7.44	Peak	162	100	HORIZONTAL
4	1496.12	26.72	54.00	-27.28	34.16	2.25	35.09	-7.44	Average	162	100	HORIZONTAL
5	1594.62	26.99	54.00	-27.01	33.65	2.33	35.01	-6.66	Average	106	100	HORIZONTAL
6	1596.45	36.58	74.00	-37.42	43.24	2.33	35.01	-6.66	Peak	106	100	HORIZONTAL


Vertical

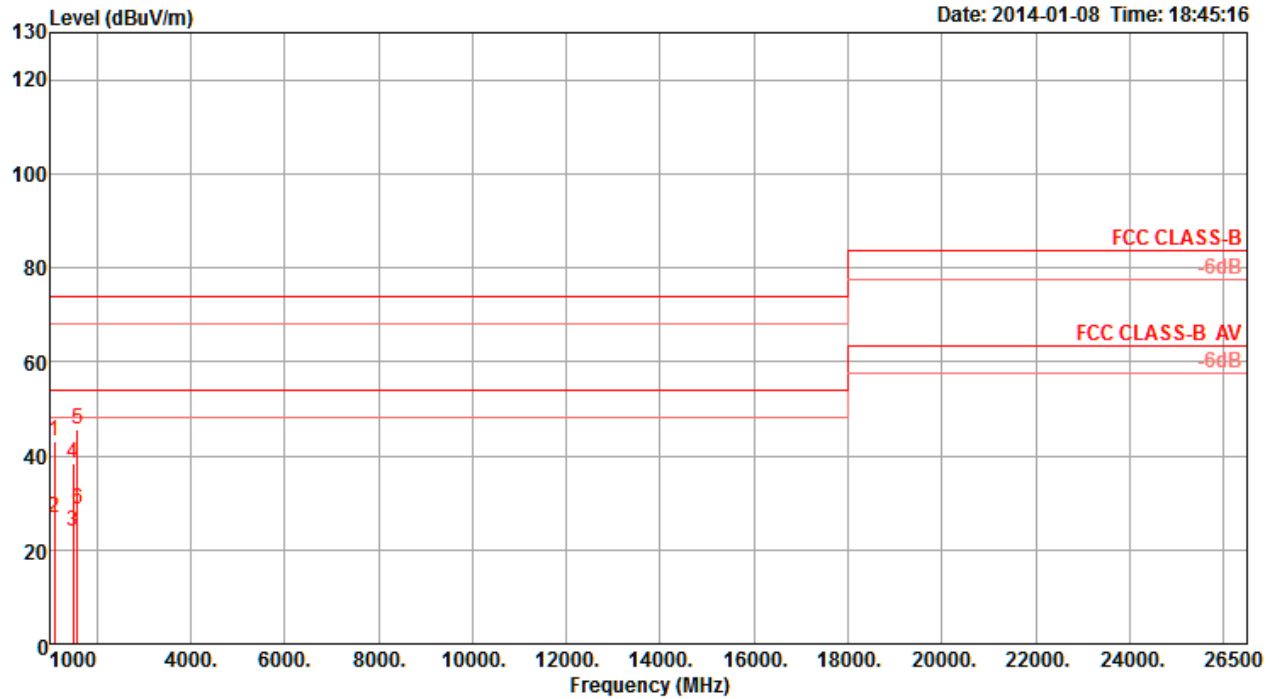

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	1096.01	43.04	74.00	-30.96	52.83	1.92	35.76	-9.79	Peak	313	107	VERTICAL
2	1096.44	26.78	54.00	-27.22	36.57	1.92	35.76	-9.79	Average	312	107	VERTICAL
3	1495.58	23.96	54.00	-30.04	31.40	2.25	35.09	-7.44	Average	59	100	VERTICAL
4	1495.76	38.34	74.00	-35.66	45.78	2.25	35.09	-7.44	Peak	59	100	VERTICAL
5	1594.15	45.78	74.00	-28.22	52.44	2.33	35.01	-6.66	Peak	329	129	VERTICAL
6	1595.37	28.69	54.00	-25.31	35.35	2.33	35.01	-6.66	Average	329	129	VERTICAL


Temperature	20°C	Humidity	55%
Test Engineer	David Tseng	Configurations	5GHz WLAN function + Bluetooth function

Horizontal

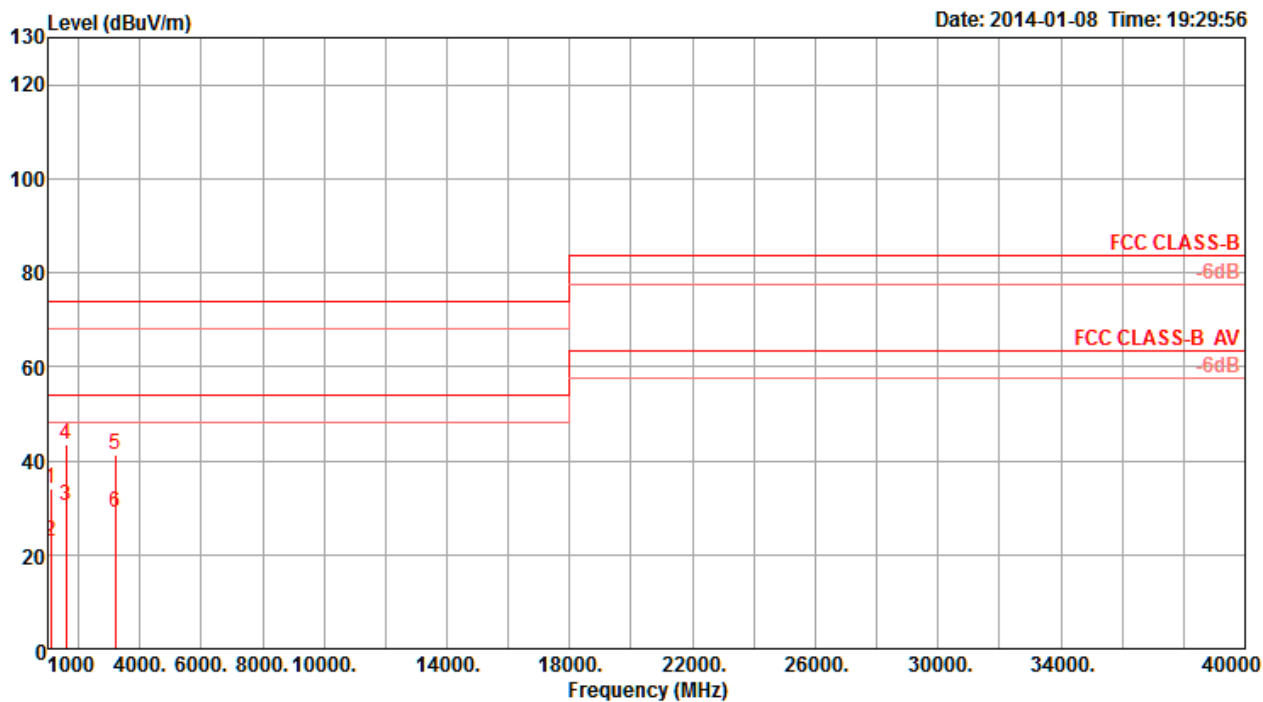

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	1091.33	33.98	74.00	-40.02	43.85	1.90	35.76	-9.87	Peak	314	100	HORIZONTAL
2	1091.47	22.71	54.00	-31.29	32.58	1.90	35.76	-9.87	Average	314	100	HORIZONTAL
3	1594.28	30.47	54.00	-23.53	37.13	2.33	35.01	-6.66	Average	149	100	HORIZONTAL
4	1596.32	43.59	74.00	-30.41	50.25	2.33	35.01	-6.66	Peak	149	100	HORIZONTAL
5	3191.93	41.46	74.00	-32.54	43.33	3.38	34.81	-1.87	Peak	255	120	HORIZONTAL
6	3192.37	28.98	54.00	-25.02	30.85	3.38	34.81	-1.87	Average	255	120	HORIZONTAL

Vertical

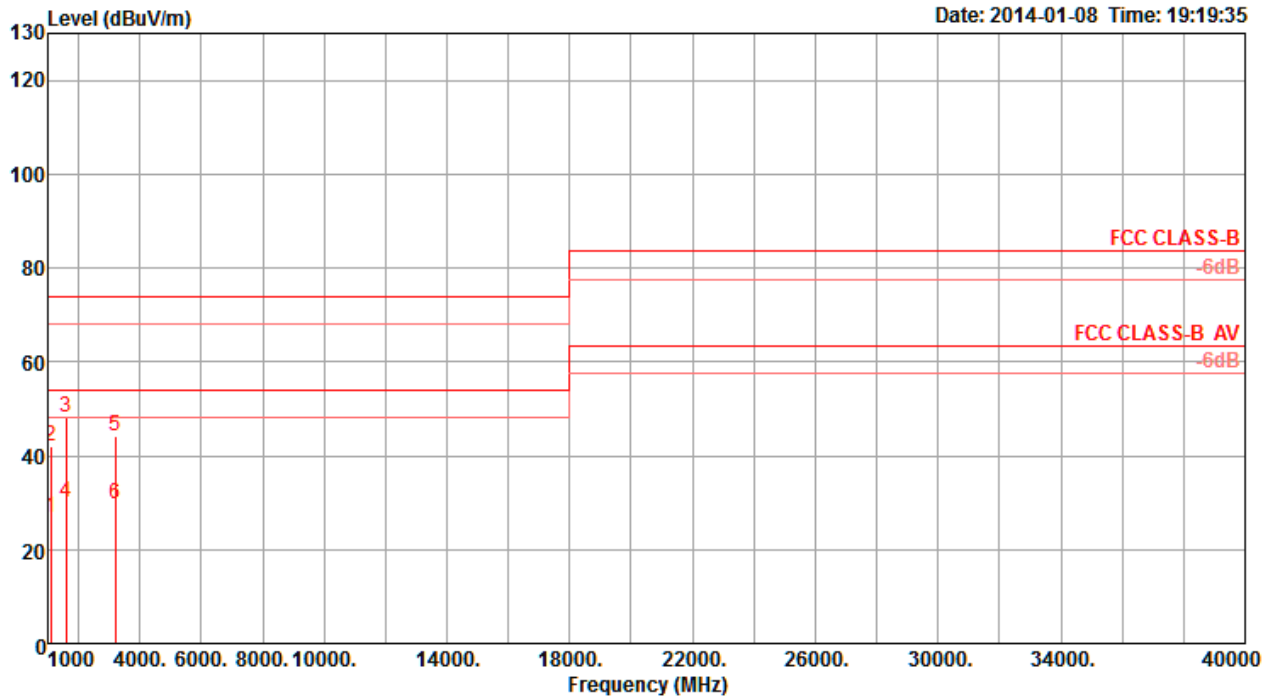

	Freq	Level	Limit	Over	Read	Cable	Preamp			T/Pos	A/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	deg	cm	Pol/Phase
1	1096.39	26.69	54.00	-27.31	36.48	1.92	35.76	-9.79	Average	316	104	VERTICAL
2	1096.92	42.11	74.00	-31.89	51.90	1.92	35.76	-9.79	Peak	316	104	VERTICAL
3	1594.14	48.02	74.00	-25.98	54.68	2.33	35.01	-6.66	Peak	206	109	VERTICAL
4	1595.04	30.06	54.00	-23.94	36.72	2.33	35.01	-6.66	Average	206	109	VERTICAL
5	3190.76	44.29	74.00	-29.71	46.16	3.38	34.81	-1.87	Peak	358	111	VERTICAL
6	3190.82	29.55	54.00	-24.45	31.42	3.38	34.81	-1.87	Average	358	111	VERTICAL