



# FCC RF Test Report

**APPLICANT** : Gemalto M2M GmbH  
**EQUIPMENT** : CDMA 1XRTT Module  
**BRAND NAME** : Cinterion  
**MODEL NAME** : PCS3  
**FCC ID** : QIPPCS3  
**STANDARD** : FCC 47 CFR Part 2, and 90(S)  
**CLASSIFICATION** : PCS Licensed Transmitter (PCB)  
**Tx/Rx FREQUENCY RANGE** : CDMA2000 BC10 : 817.9 MHz ~ 823.1 MHz /  
862.9 MHz ~ 868.1 MHz

The product was received on Aug. 26, 2013 and testing was completed on Sep. 10, 2013. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**  
No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1    Applicant.....	5
1.2    Manufacturer .....	5
1.3    Feature of Equipment Under Test .....	5
1.4    Product Specification of Equipment Under Test .....	5
1.5    Modification of EUT .....	5
1.6    Testing Site.....	6
1.7    Applied Standards .....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1    Test Mode.....	7
2.2    Connection Diagram of Test System .....	8
2.3    Support Unit used in test configuration and system.....	8
<b>3 TEST RESULT.....</b>	<b>9</b>
3.1    Conducted Output Power Measurement.....	9
3.2    Bandwidth Limitations Measurement .....	11
3.3    Emissions Mask Measurement .....	13
3.4    Emissions Mask – Out Of Band Emissions Measurement.....	16
3.5    Field Strength of Spurious Radiation Measurement .....	19
3.6    Frequency Stability Measurement.....	23
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>26</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>27</b>

### APPENDIX A. SETUP PHOTOGRAPHS



# REVISION HISTORY



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	N/A , Reporting only	PASS	-
3.2	§2.1049 §90.209	Bandwidth limitations	N/A, Reporting only	PASS	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	$< 50+10\log_{10}(P[\text{Watts}])$	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 38.45 dB at 3282.000 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



## 1 General Description

### 1.1 Applicant

Gemalto M2M GmbH

Siemensdamm 50 Berlin 13629 Germany

### 1.2 Manufacturer

HON HAI PRECISION IND. CO., LTD.

5F-1,5 Hsin-An road, Hsinchu, Science-Bases Industrial Park 300, Taiwan, R.O.C.

### 1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	CDMA 1XRTT Module
Brand Name	Cinterion
Model Name	PCS3
FCC ID	QIPPCS3
EUT supports Radios application	CDMA
EUT Stage	Production Unit

### 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	CDMA2000 BC10 : 817.9 MHz ~ 823.1 MHz
Rx Frequency	CDMA2000 BC10 : 862.9 MHz ~ 868.1 MHz
Maximum Output Power to Antenna	CDMA2000 BC10 : 24.49 dBm
Type of Modulation	CDMA2000 : QPSK

**Remark:** This test report recorded only product characteristics and test results of PCS Licensed Transmitter (PCB).

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.6 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	TH02-HY	03CH07-HY	722060/4086B-1

## 1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- FCC 47 CFR Part 2, 90
- ANSI / TIA / EIA-603-C-2004

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz for CDMA2000 BC10.


Test Modes		
Band	Radiated TCs	Conducted TCs
CDMA2000 BC10	■ 1xRTT Link	■ 1xRTT Link

**Note:** The maximum RF output power levels are 1xRTT RC1+SO55 mode for CDMA2000 BC10 on QPSK Link; only these modes were used for all tests.

The conducted power table is as follows:

Conducted Power (*Unit: dBm)			
Band	CDMA2000 BC10		
Channel	476	580	684
Frequency	817.90	820.50	823.10
1xRTT RC1+SO55	24.47	24.40	24.49
1xRTT RC3+SO55	24.43	24.37	24.41
1xRTT RC3+SO32 (+F-SCH)	24.48	24.39	24.46
1xRTT RC3+SO32 (+SCH)	24.42	24.35	24.43

## 2.2 Connection Diagram of Test System

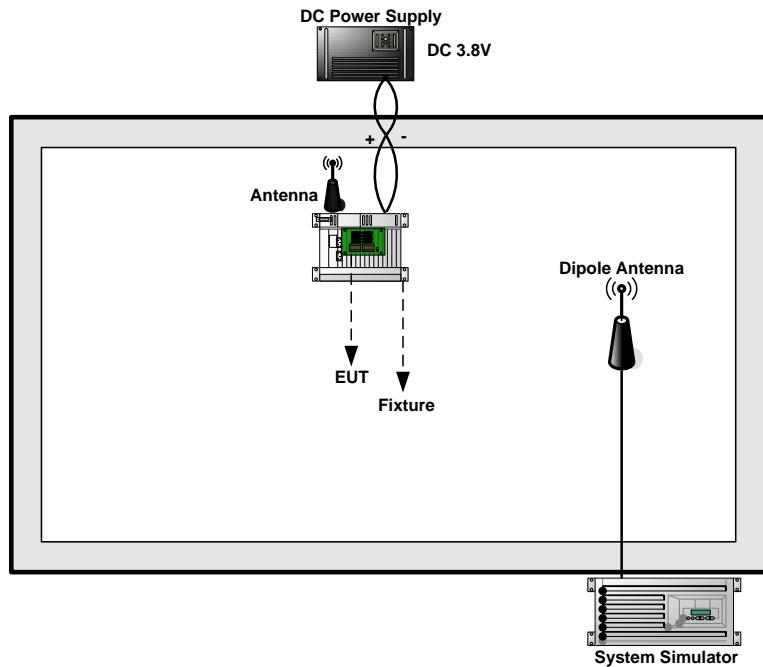

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	Topward	3303D	N/A	N/A	Unshielded, 1.8 m
3.	Fixture	N/A	N/A	N/A	N/A	N/A

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

##### 3.1.4 Test Setup

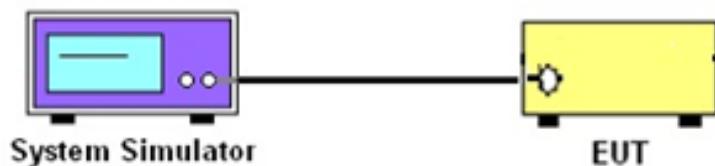



### 3.1.5 Test Result of Conducted Output Power

CDMA 2000 BC10			
Modes	CDMA 2000 1xRTT		
Test Status	RC1+SO55		
Channel	467 (Low)	580 (Mid)	684 (High)
Frequency (MHz)	817.9	820.5	823.1
Conducted Power (dBm)	24.47	24.40	24.49
Conducted Power (Watts)	0.28	0.28	0.28

**Note:** maximum burst average power for CDMA.

## 3.2 Bandwidth Limitations Measurement

### 3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures


1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.

### 3.2.4 Test Setup

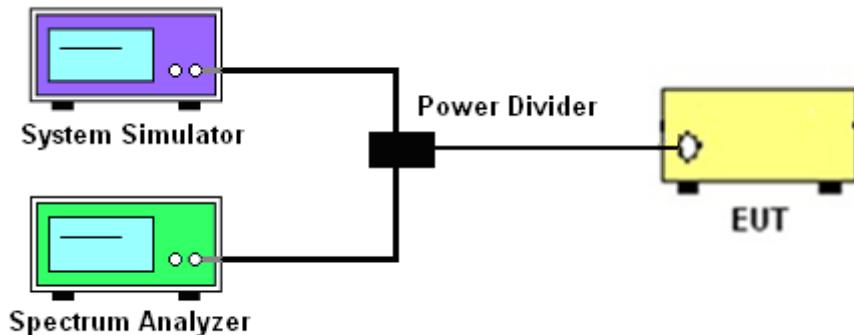


### 3.2.5 Test Result (Plots) of Occupied Bandwidth

<b>Band :</b>	CDMA2000 BC 10	<b>Power Stage :</b>	High
<b>Test Mode :</b>	1xRTT_RC1+SO55		

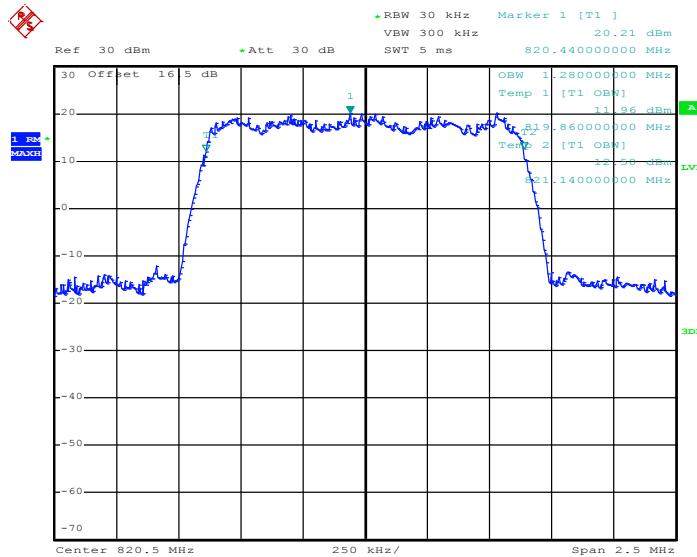**99% Occupied Bandwidth Plot on Channel 580**


Date: 10.SEP.2013 15:18:03

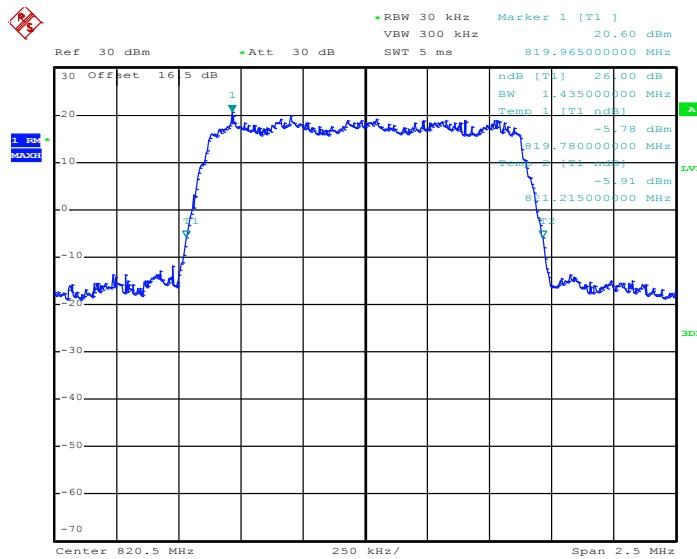**26dB Bandwidth Plot on Channel 580**


Date: 10.SEP.2013 15:11:44



### 3.3 Emissions Mask Measurement

#### 3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a)(1)

(a). Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

#### 3.3.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The emissions mask of low and high channels for the highest RF powers were measured.
3. The RBW was set 30 kHz, higher than 1% of bandwidth 1.27MHz, and VBW was set 3 times of RBW.
4. The final test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.
5. The 1% of bandwidth 1.27MHz approximately was 13kHz. The test results need to follow below equation.

$$\text{Test Result(dBm)} = \text{PwrAbs(dBm)} + 10 * \log(13\text{kHz}/30\text{kHz})(\text{dB}) \sim -3.63\text{dB}$$


### **3.3.4 Test Setup**

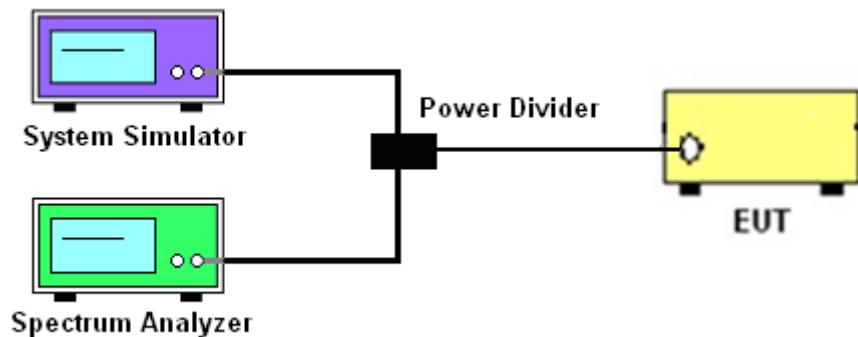

### 3.3.5 Test Result (Plots) of Conducted Emissions Mask


<b>Band :</b>	CDMA2000 BC10	<b>Power Stage :</b>	High
<b>Test Mode :</b>	1xRTT_RC1+SO55		

**Lower Band Edge Plot on Channel 476**

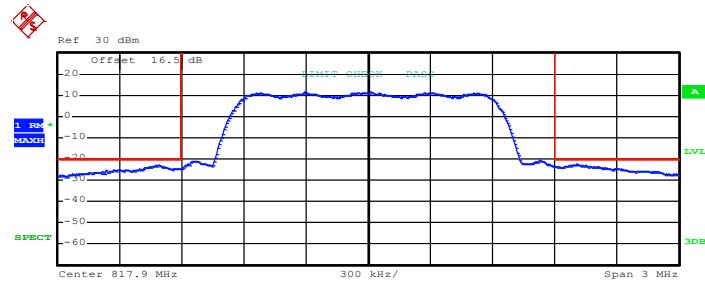

Date: 10.SEP.2013 14:48:22

**Higher Band Edge Plot on Channel 684**

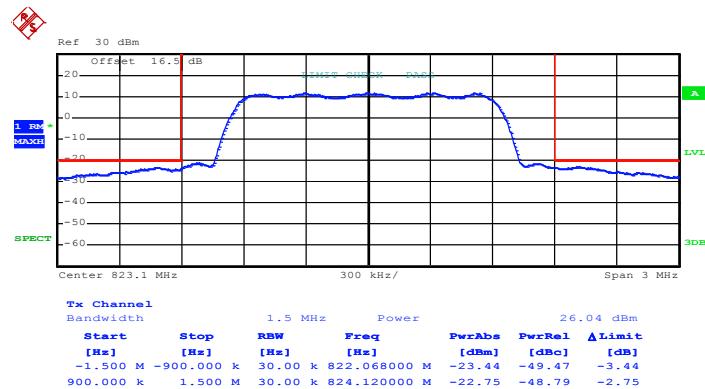

Date: 10.SEP.2013 14:54:04

### 3.4 Emissions Mask – Out Of Band Emissions Measurement

#### 3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least  $43 + 10 \log (P)$  dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures


1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.
4. The final test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

#### 3.4.4 Test Setup

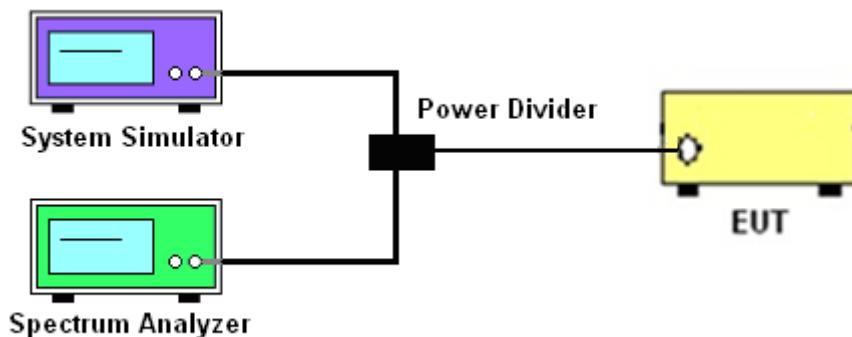


### 3.4.5 Test Result (Plots) of Conducted Emission

<b>Band :</b>	CDMA2000 BC10	<b>Power Stage :</b>	High
<b>Test Mode :</b>	1xRTT_RC1+SO55		

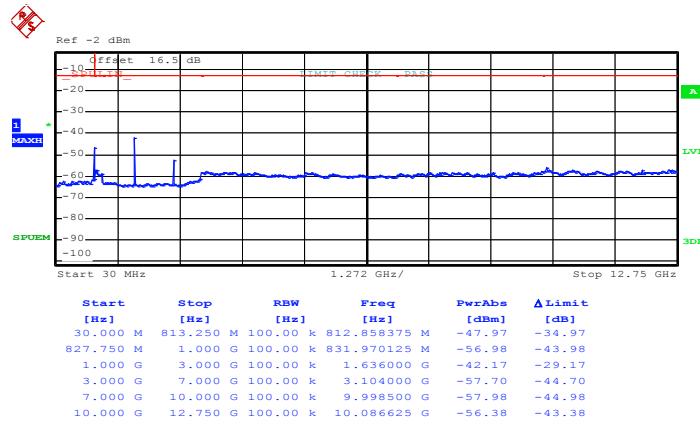**Conducted Emission Plot between on Channel 476**


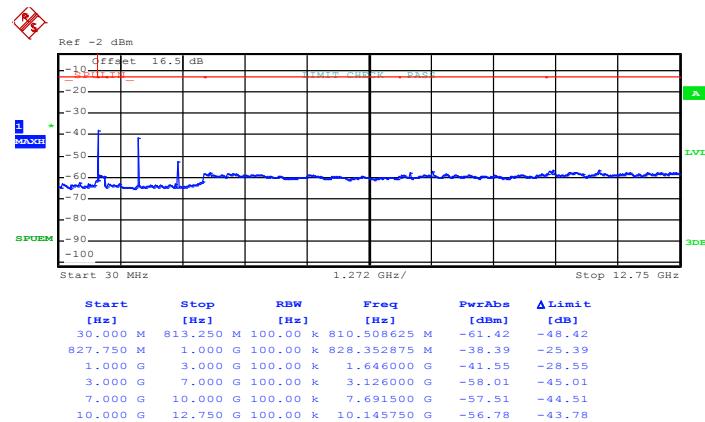
Date: 10.SEP.2013 14:02:16

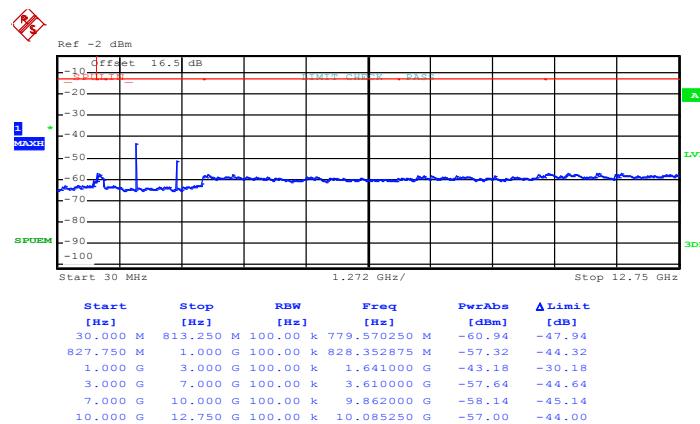**Conducted Emission Plot between on Channel 580**


Date: 10.SEP.2013 14:01:17



## Conducted Emission Plot between on Channel 684



Date: 10.SEP.2013 14:03:03



## 3.5 Field Strength of Spurious Radiation Measurement

### 3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least  $43 + 10 \log(P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log_{10}(P[\text{Watts}])$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.



### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
11. ERP (dBm) = EIRP - 2.15
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from  $43 + 10 \log(P)$  dB below the transmitter power P(Watts)  
$$= P(W) - [43 + 10 \log(P)] \text{ (dB)}$$
$$= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)}$$
$$= -13 \text{ dBm.}$$

### 3.5.4 Test Setup

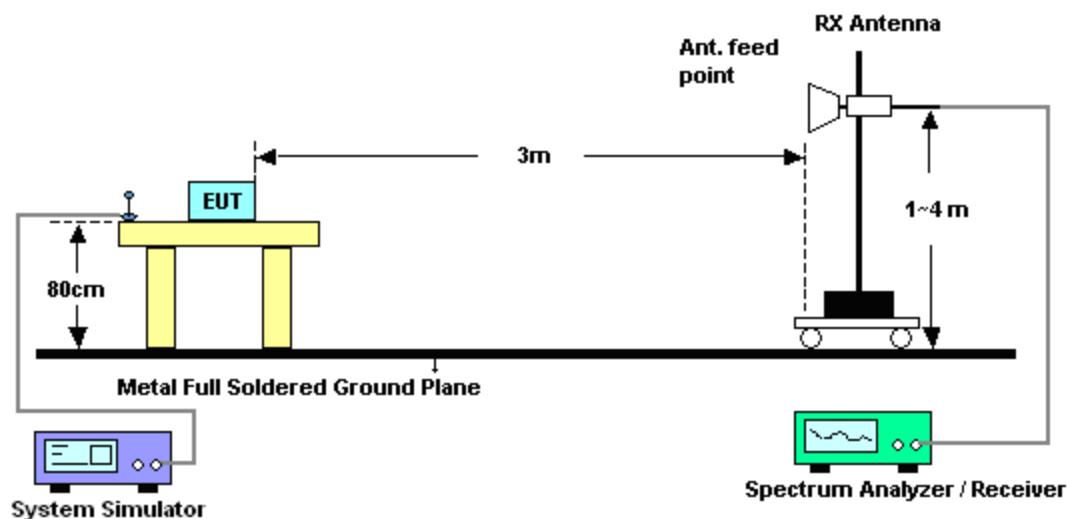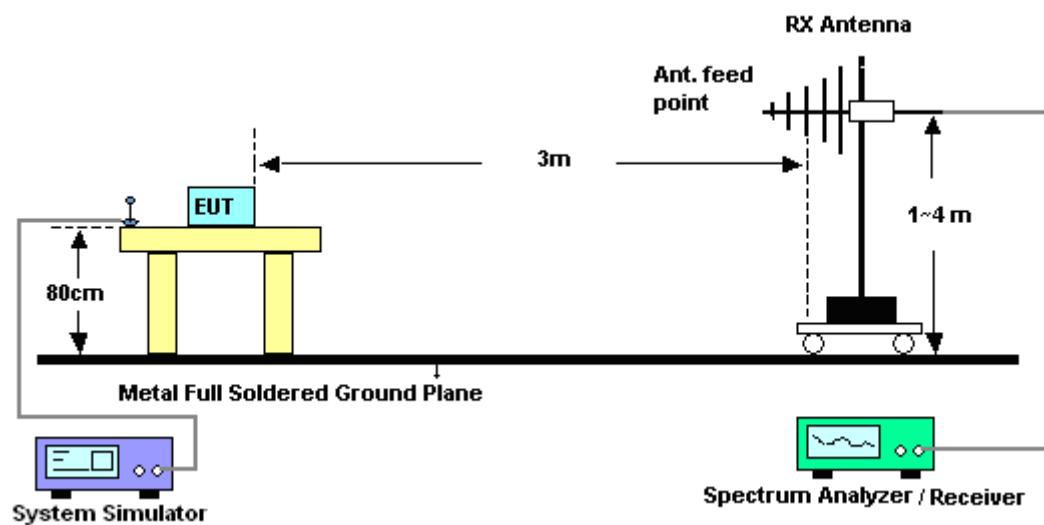



## 3.5.5 Test Result of Field Strength of Spurious Radiated

Band :	CDMA2000 BC10	Temperature :	22~24°C						
Test Mode :	1xRTT_RC1+SO55	Relative Humidity :	51~53%						
Test Engineer :	Ken Wu	Polarization :	Horizontal						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
			Date: 2013-09-10						
Site	: 03CH07-HY								
Condition	: -13 HF-EIRP(080306) HORIZONTAL								
Frequency	ERP	Limit	Over Limit	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
( MHz )	( dBm )	( dBm )	( dB )	Reading (dBm)	Power (dBm)	loss ( dB )	Gain (dBi)	( H/V )	
1641	-57.26	-13	-44.26	-66.17	-59.1	1.51	5.50	H	Pass
2461.5	-54.28	-13	-41.28	-67.53	-56.2	2.04	6.11	H	Pass
3282	-53.05	-13	-40.05	-67.24	-56.3	2.45	7.85	H	Pass



<b>Band :</b>	CDMA2000 BC10	<b>Temperature :</b>	22~24°C						
<b>Test Mode :</b>	1xRTT_RC1+SO55	<b>Relative Humidity :</b>	51~53%						
<b>Test Engineer :</b>	Ken Wu	<b>Polarization :</b>	Vertical						
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
			Date: 2013-09-10						
Site Condition	: 03CH07-HY : -13 HF-EIRP(080306) VERTICAL								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1641	-55.66	-13	-42.66	-66.68	-57.5	1.51	5.50	V	Pass
2461.5	-53.18	-13	-40.18	-66.86	-55.1	2.04	6.11	V	Pass
3282	-51.45	-13	-38.45	-67.11	-54.7	2.45	7.85	V	Pass



## **3.6 Frequency Stability Measurement**

### **3.6.1 Description of Frequency Stability Measurement**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency according to FCC Part 90.213.

### **3.6.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.


### **3.6.3 Test Procedures for Temperature Variation**

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to  $-30^\circ\text{C}$  and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^\circ\text{C}$  step up to  $50^\circ\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### **3.6.4 Test Procedures for Voltage Variation**

1. The EUT was placed in a temperature chamber at  $25\pm 5^\circ\text{C}$  and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

### 3.6.5 Test Setup

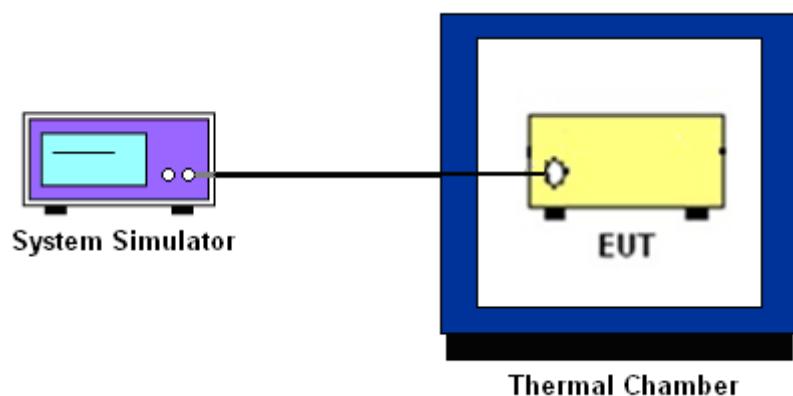

### 3.6.6 Test Result of Temperature Variation

<b>Band :</b>	CDMA2000 BC10	<b>Channel :</b>	580
<b>Test Mode :</b>	1xRTT_RC1+SO55	<b>Limit (ppm) :</b>	2.5
Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	-15	-0.0183	PASS
-20	-11	-0.0134	
-10	-13	-0.0158	
0	-11	-0.0134	
10	-10	-0.0122	
20	-15	-0.0183	
30	14	0.0171	
40	-13	-0.0158	
50	-18	-0.0219	



### 3.6.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
CDMA2000 BC10 CH580	1xRTT_RC1+SO55	3.8	-9	-0.0110	2.5	PASS
		BEP	-10	-0.0122		
		4.2	-12	-0.0146		

**Note :**

1. Normal Voltage = 3.8V.
2. Battery End Point (BEP) = 3.4 V.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	Rohde & Schwarz	CMU200	117591	N/A	Oct. 21, 2011	Sep. 10, 2013	Oct. 20, 2013	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Sep. 10, 2013	Jun. 06, 2014	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 19, 2013	Sep. 10, 2013	Jul. 18, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9KHz~30GHz	Nov. 30, 2012	Sep. 10, 2013	Nov. 29, 2013	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz~1GHz	Oct. 06, 2012	Sep. 10, 2013	Oct. 05, 2013	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 22, 2013	Sep. 10, 2013	Aug. 21, 2014	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	30MHz~1GHz	Feb. 26, 2013	Sep. 10, 2013	Feb. 25, 2014	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Dec. 01, 2012	Sep. 10, 2013	Nov. 30, 2013	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Sep. 10, 2013	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	ChainTek 3000	N/A	N/A	N/A	Sep. 10, 2013	N/A	Radiation (03CH07-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.54</b>		

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma 1 = 0.197$ Antenna VSWR $\Gamma 2 = 0.194$ Uncertainty = $20\log(1-\Gamma 1 * \Gamma 2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				

